Zhejiang Haitong communications electronic Limited by Share Ltd. (Shenzhen Haitong)

Customer: TCL Communication Ltd.

Project name: T702Z

Product name: T702Z - Cellular & wifi antenna

Date: 2024.10.12

Material: FPC

Manufacturer: Shenzhen Haitong

Manufacturer Address: Southern District, Phoenix Tower, 15 Nanshan District science and

Technology North Road, Shenzhen, Guangdong.

郑由福

Antenna gain and radiation pattern measured in SATIMO anechoic chamber.

Test engineer: youqiang zheng

Test Equipment list


Description	Manufacturer	Model	Cal Date
Vector Network Analyzer	Agilent Technologies	E5071C	2024.10.10
Anechoic Chamber	SATIMO	SG24	2024.10.10

2. Test system introduction


2.1 Anechoic chamber

Our company has a number of anechoic chamber for OTA test. It is ranging from 400 MHz to 8.5 GHz, which can provide passive test and active test, including OTA overall 2G, 3G, 4G, 5G FR test, WiFi multi-mode test, GPS active test, Bluetooth active test. The test system can provide antenna gain, efficiency, radiation pattern, upper and lower hemisphere efficiency values and mutual disturbance correlation coefficient analysis.



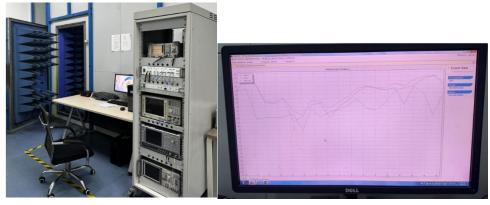

2.2 Test system architecture

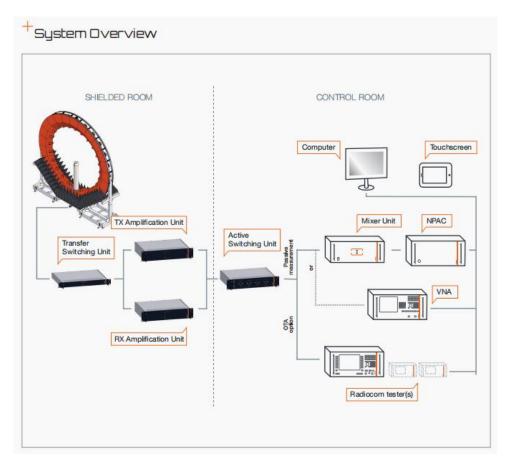

The figure above shows the connection and control process between the anechoic chamber of our company and the testing system and computer. The testing system has the characteristics of accurate, fast and simple testing. The operation interface is simple and humanized.

3. Test result

3.1 Antenna placement:

Antenna	Type	Description
0	FPC	LB TRX+MHB MIMO PRX antenna
1	FPC	LB DRX + MHB DRX + MB TRX2(EN-DC) + HB TRX2 antenna
2	FPC	MB TRX + UHB TRX1 antenna
3	FPC	UHB MIMO DRX antenna
4	FPC	HB TRX1 antenna
5	FPC	MB MIMO DRX + UHB MIMO PRX antenna
6	FPC	HB TRX + UHB TRX2 + UHB DRX antenna
7	FPC	GPS + WIFI 2.4G/5G+BT antenna

Antenna Gain

Gain of Antenna 0

Band	Gain average(dBi)	Gain Peak (dBi)
GSM850	-7	-3.8
GSM900	-10	-6.1
WCDMA B5	-7	-3.8
WCDMA B8	-11.1	-9.2
LTE B5	-7	-3.8
LTE B8	-11.1	-9.2
LTE B12	-6.7	-3.3
LTE B13	-6.6	-3.1
LTE B14	-6.3	-2.8
LTE B17	-6.6	-3.1
LTE B20	-6.8	-3.5
LTE B26	-7.1	-3.8
LTE B28	-6.7	-3.4
LTE B71	-6.6	-3.4
NR n5	-7	-3.8
NR n20	-6.8	-3.5
NR n28	-6.7	-3.4
NR n71	-6.7	-3.5

Gain of Antenna 1

Band	Gain average(dBi)	Gain Peak (dBi)
(ENDC)LTE B2	-4.8	-1.3
(ENDC)LTE B66	-4.6	-1
(ENDC)LTE B41	-5.8	-2.6
NR n41 TX2	-5.8	-2.6

Gain of Antenna 2

Band	Gain	Gain Peak (dBi)
	average(dBi)	
GSM1800	-6	-2.3
GSM1900	-5	-1.6
WCDMA B1	-5	-1.3
WCDMA B2	-5	-1.6
WCDMA B4	-5.7	-2.6
LTE B1	-5	-1.3
LTE B2	-5	-1.6
LTE B3	-6	-2.3
LTE B4	-5.7	-2.6
LTE B9	-5.7	-2.6

LTE B25	-5	-1.6
LTE B39	-5	-1.6
LTE B42	-5.5	-1.1
LTE B66	-5.7	-2.6
NR n25	-5	-1.6
NR n66	-5.7	-2.6
NR n77 TX1	-5.5	-1.1
NR n78	-5.5	-1.1
NR n48	-5.5	-1.1

Gain of Antenna 4

Band	Gain average(dBi)	Gain Peak (dBi)
LTE B7	-5.3	-1.5
LTE B38	-5	-0.9
LTE B41	-5.1	-1.1
NR n41 TX1	-5.1	-1.1

Gain of Antenna 6

Band	Gain average(dBi)	Gain Peak (dBi)
LTE B30	-6.3	-3.4
LTE B40	-8	-4.1
NR n30	-6.3	-3.4
NR n77 TX2		

Gain of Antenna 7

Band	Gain average(dBi)	Gain Peak (dBi)
Wi-Fi 2.4G/BT	-5.3	-0.8
Wi-Fi 5G	-6.1	-1.2

NFC antenna gain description:

The device does not support the test of NFC gain. In addition, all measurements were performed radiated and therefore additional antenna gain documentation is not required.

3.3 Radiation Pattern Antenna 0

(Frequency Band)	GSM850/LTE B5/WCDMA B5/NR n5	B12
3D Radiation Pattern		
Efficiency[%]	19	21
Avg Gain [dBi]	-7	-6.7
Peak Gain [dBi]	-3.8	-3.3
(Frequency Band)	B13	B20
3D Radiation Pattern		
Efficiency[%]	22	20
Avg Gain [dBi]	-6.6	-6.8
Peak Gain [dBi]	-3.1	-3.5
(Frequency Band)	B26	B28
3D Radiation Pattern		
Efficiency[%]	19	21
Avg Gain [dBi]	-7.1	-6.7
Peak Gain [dBi]	-3.8	-3.4

(Frequency Band)	B14	B17	
3D Radiation Pattern			
Efficiency[%]	22	22	
Avg Gain [dBi]	-6.3	-6.6	
Peak Gain [dBi]	-2.8	-3.1	
(Frequency Band)	LTE B71/	′NR n71	
3D Radiation Pattern			
Efficiency[%]	22		
Avg Gain [dBi]	-6.6		
Peak Gain [dBi]	-3.4		

Antenna 1

(Frequency Band)	B2	B66	
3D Radiation Pattern			
Efficiency[%]	33	35	
Avg Gain [dBi]	-4.8	-4.6	

Peak Gain [dBi]	-1.3	-1
-----------------	------	----

(Frequency Band)	N41 TX2
3D Radiation Pattern	
Efficiency[%]	28
Avg Gain [dBi]	-5.8
Peak Gain [dBi]	-26

Antenna 2

(Frequency Band)	WCDMA B1/LTE B1	GSM1900/WCDMA B2/LTE
		B2/B25/B39/NR n25
3D Radiation Pattern		
Efficiency[%]	31	30
Avg Gain [dBi]	-5.0	-5
Peak Gain [dBi]	-1.3	-1.6
(Frequency Band)	GSM1800/LTE B3	WCDMA B4/LTE
(Frequency band)	G31V11800/E1E B3	B4/B9/B66/NR n66
3D Radiation Pattern		
Efficiency[%]	26	27

Avg Gain [dBi]	-6.0	-5.7
Peak Gain [dBi]	-2.3	-2.6
(Frequency Band)	LTE B42/NR n48/n77 TX1/n78	
3D Radiation Pattern		
Efficiency[%]	28	
Avg Gain [dBi]	-5.5	
Peak Gain [dBi]	-1.1	

Antenna 4


(Frequency Band)	В7	B38
3D Radiation Pattern		
Efficiency[%]	30	31
Avg Gain [dBi]	-5.3	-5
Peak Gain [dBi]	-1.5	-0.9
(Frequency Band)	LTE B41/N	R n41
3D Radiation Pattern		
Efficiency[%]	31	
Avg Gain [dBi]	-5.1	
Peak Gain [dBi]	-1.1	

Antenna 6

/E	D 40
(Frequency Band)	B4()
(i requeries baria)	B 10

3D Radiation Pattern		
Efficiency[%]	16	
Avg Gain [dBi]	-8	
Peak Gain [dBi]	-4.1	

(Frequency Band)	B30	
3D Radiation Pattern		
Efficiency[%]	19	
Avg Gain [dBi]	-6.3	
Peak Gain [dBi]	-3.4	

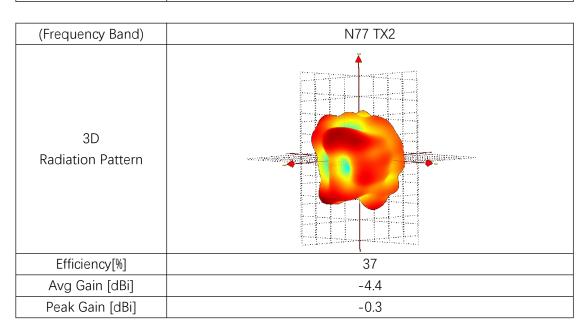

Antenna 7

	/ Interina /	
(Frequency Band)	WiFi 2.4G/BT	WiFi 5G
3D Radiation Pattern		
Efficiency[%]	30	24
Avg Gain [dBi]	-5.3	-6.1
Peak Gain [dBi]	-0.8	-1.2