



Appendix D

RF Test Data for 5.2G WIFI (Conducted Measurement)

Product Name: Tablet

Trade Mark: CRAVE

Test Model: T3

Environmental Conditions

Temperature:	21.1° C
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Wunder Wu
Supervised by:	Li Huan



D.1 Emission Bandwidth


Test Result

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.480	5170.280	5189.760	---	PASS
		5200	19.480	5190.280	5209.760	---	PASS
		5240	19.560	5230.360	5249.920	---	PASS
11N20SISO	Ant1	5180	19.840	5170.000	5189.840	---	PASS
		5200	19.800	5190.080	5209.880	---	PASS
		5240	19.800	5230.160	5249.960	---	PASS
11N40SISO	Ant1	5190	39.760	5170.080	5209.840	---	PASS
		5230	40.080	5210.000	5250.080	---	PASS
11AC20SISO	Ant1	5180	19.840	5170.080	5189.920	---	PASS
		5200	19.800	5190.160	5209.960	---	PASS
		5240	19.760	5230.080	5249.840	---	PASS
11AC40SISO	Ant1	5190	39.840	5170.000	5209.840	---	PASS
		5230	39.680	5210.080	5249.760	---	PASS
11AC80SISO	Ant1	5210	81.920	5169.040	5250.960	---	PASS




Test Graphs


11A_Ant1_5180

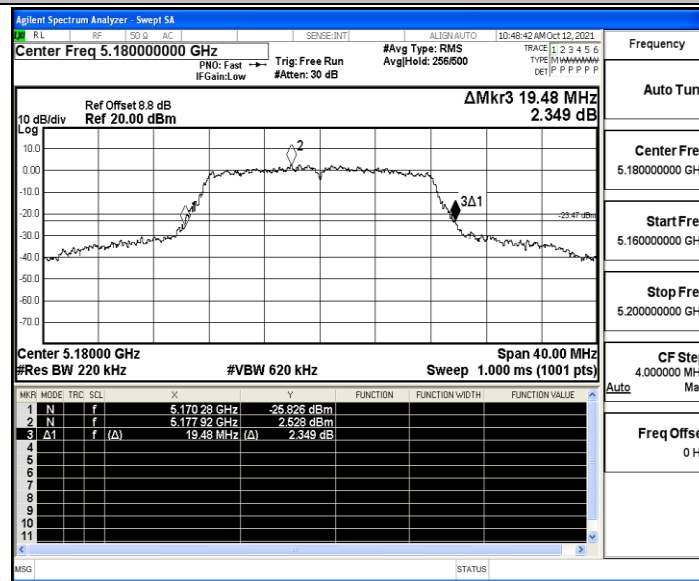


11A_Ant1_5200

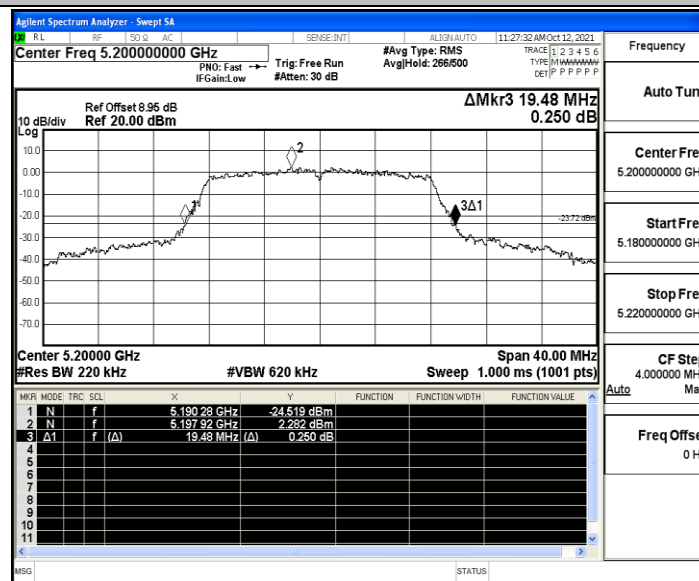


11A_Ant1_5240

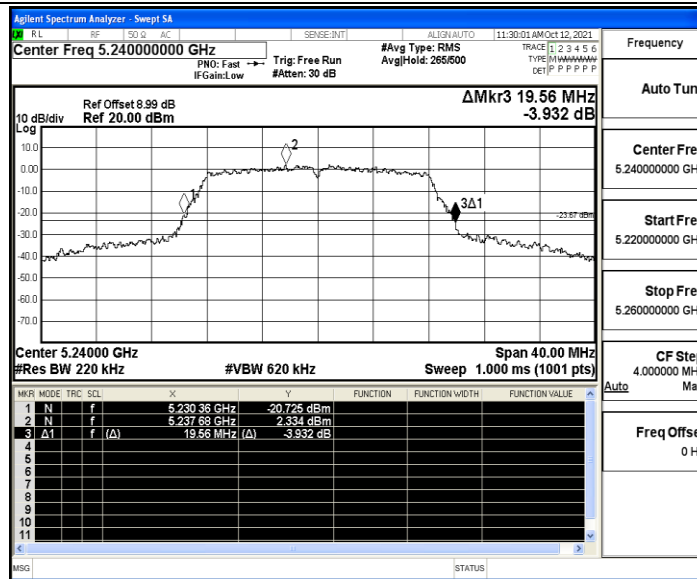

11N20SISO_Ant1_5180

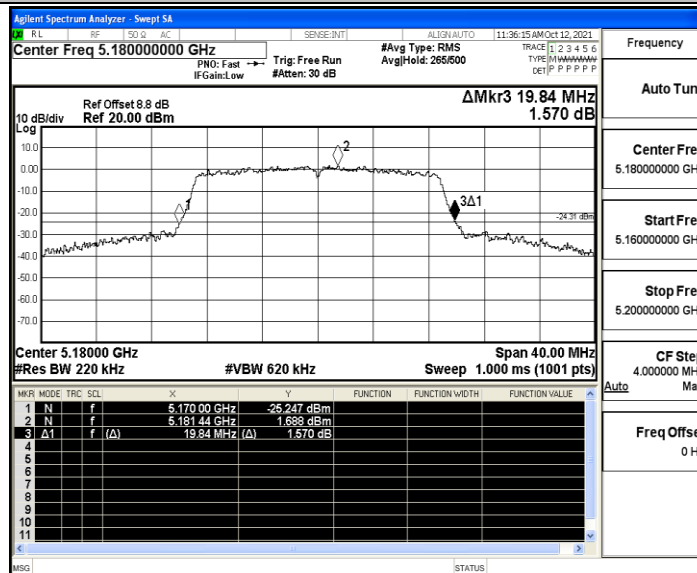


11N20SISO_Ant1_5200

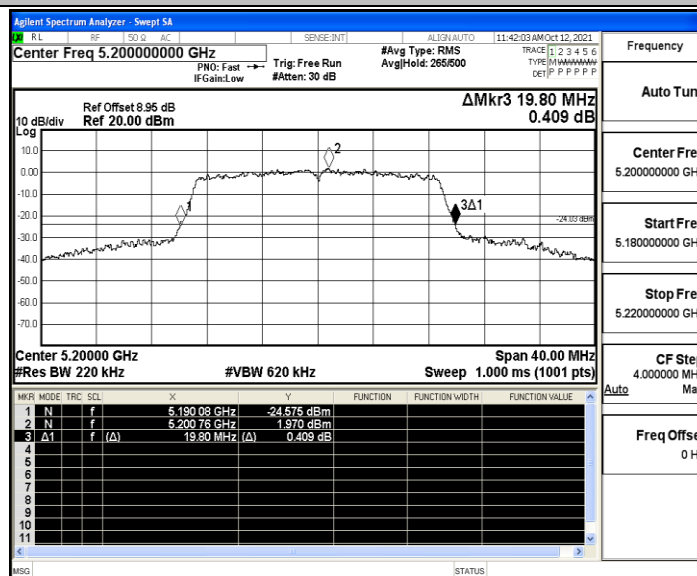





11N20SISO_Ant1_5240

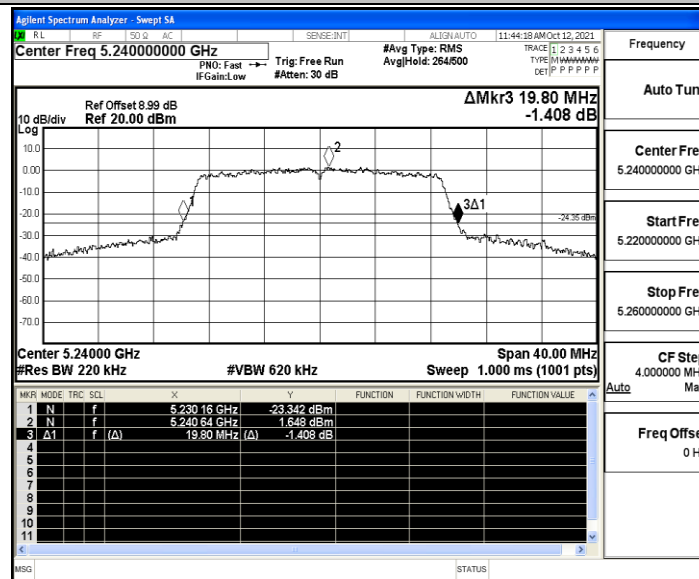


11N40SISO_Ant1_5190

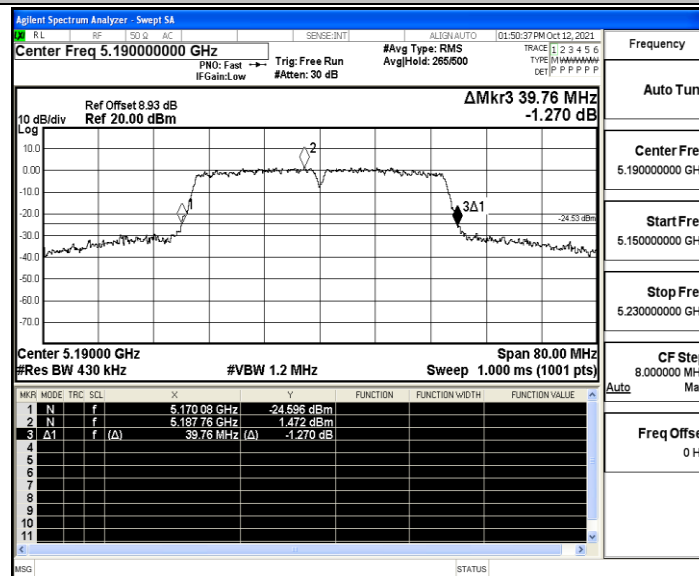


11N40SISO_Ant1_5230

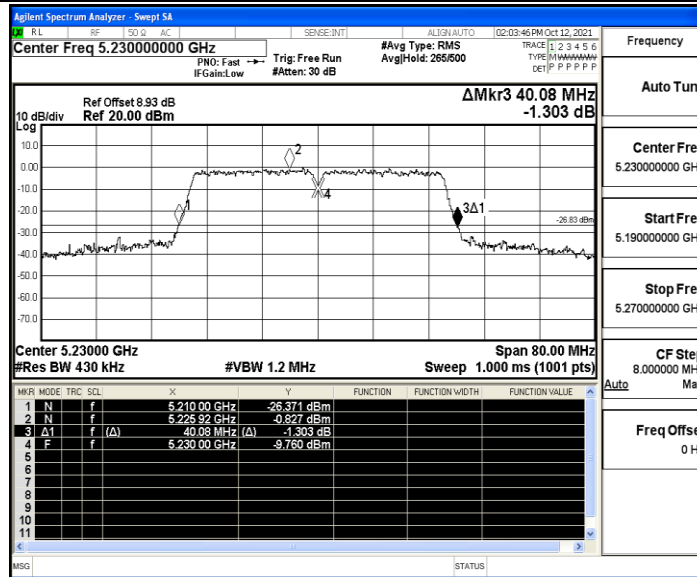

11AC20SISO_Ant1_5180

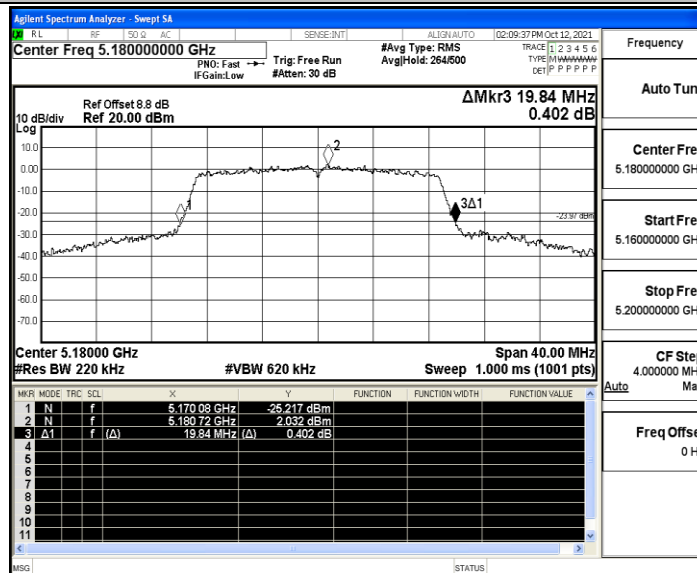


11AC20SISO_Ant1_5200

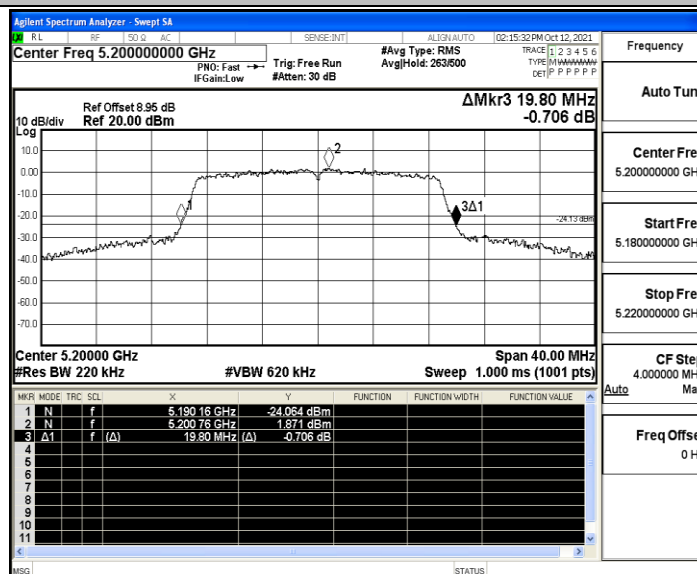





11AC20SISO_Ant1_5240

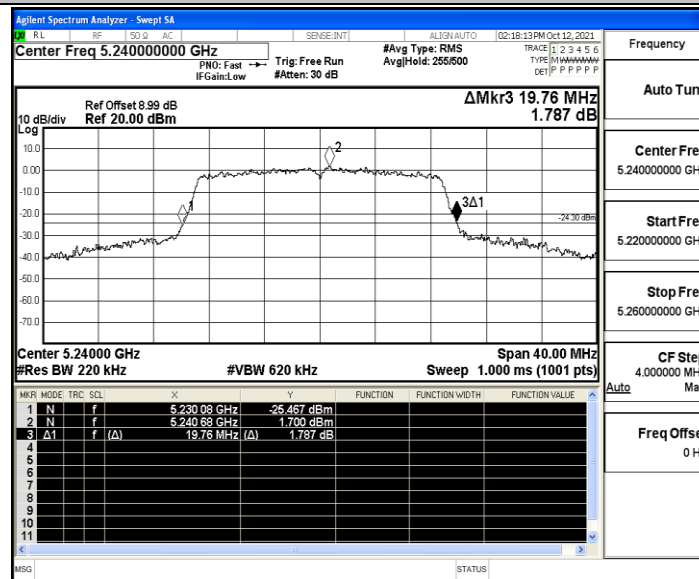


11AC40SISO_Ant1_5190

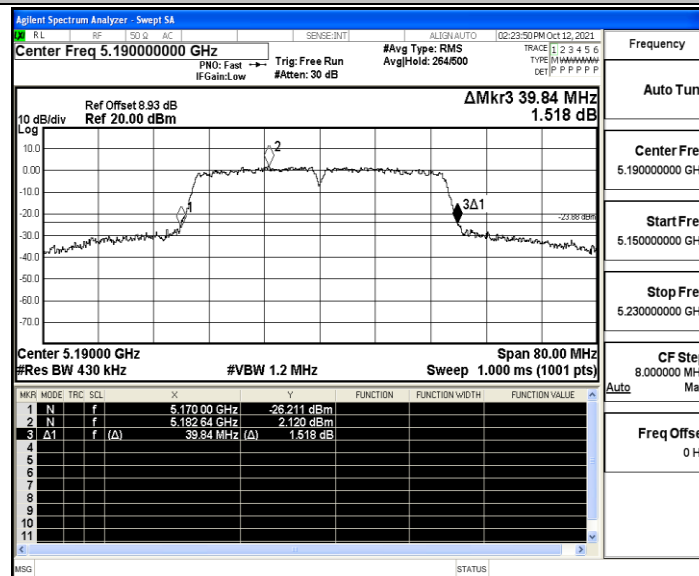

11AC40SISO_Ant1_5230

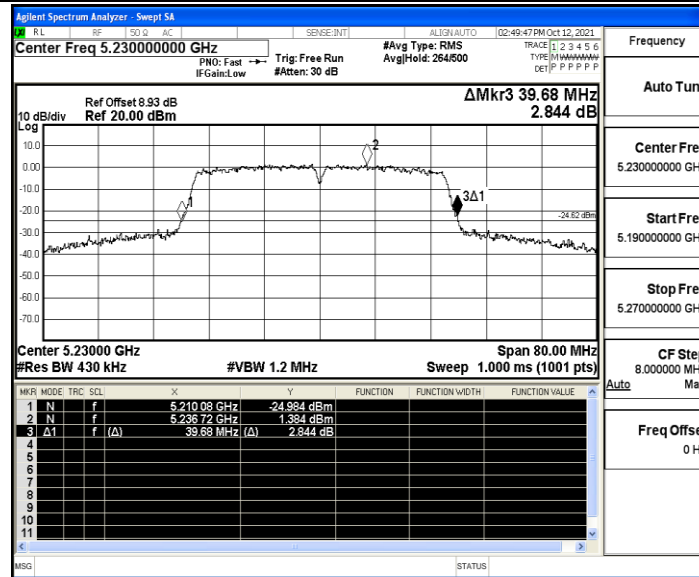

11AC80SISO_Ant1_5210

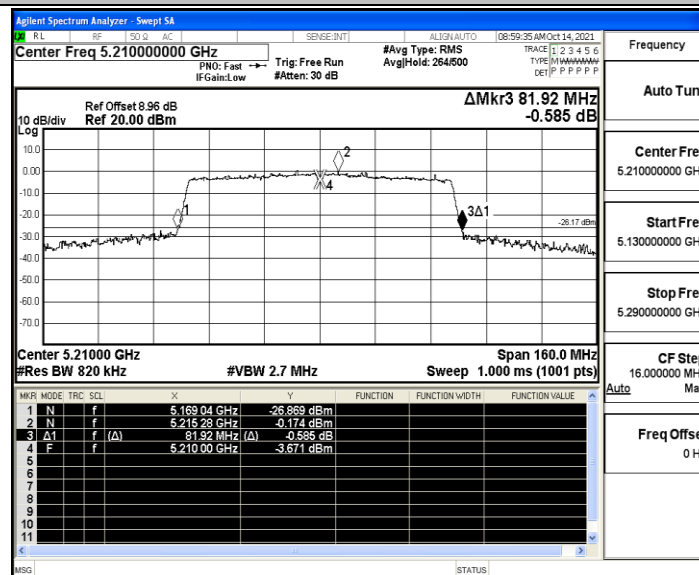



D.2 Maximum conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	15.93	≤ 23.98	PASS
		5200	15.90	≤ 23.98	PASS
		5240	15.76	≤ 23.98	PASS
11N20SISO	Ant1	5180	15.14	≤ 23.98	PASS
		5200	15.90	≤ 23.98	PASS
		5240	15.76	≤ 23.98	PASS
11N40SISO	Ant1	5190	15.00	≤ 23.98	PASS
		5230	14.22	≤ 23.98	PASS
11AC20SISO	Ant1	5180	15.00	≤ 23.98	PASS
		5200	14.21	≤ 23.98	PASS
		5240	14.70	≤ 23.98	PASS
11AC40SISO	Ant1	5190	14.37	≤ 23.98	PASS
		5230	15.95	≤ 23.98	PASS
11AC80SISO	Ant1	5210	14.77	≤ 23.98	PASS

Note: The Duty Cycle Factor is compensated in the graph.



D.3 Maximum power spectral density

Test Result


TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	1.78	≤ 11	PASS
		5200	1.63	≤ 11	PASS
		5240	1.47	≤ 11	PASS
11N20SISO	Ant1	5180	1.77	≤ 11	PASS
		5200	1.83	≤ 11	PASS
		5240	1.44	≤ 11	PASS
11N40SISO	Ant1	5190	-2.11	≤ 11	PASS
		5230	-4.19	≤ 11	PASS
11AC20SISO	Ant1	5180	1.50	≤ 11	PASS
		5200	1.86	≤ 11	PASS
		5240	1.09	≤ 11	PASS
11AC40SISO	Ant1	5190	-1.74	≤ 11	PASS
		5230	-1.98	≤ 11	PASS
11AC80SISO	Ant1	5210	-5.90	≤ 11	PASS

Note: The Duty Cycle Factor and RBW Factor is compensated in the graph.




Test Graphs


11A_Ant1_5180

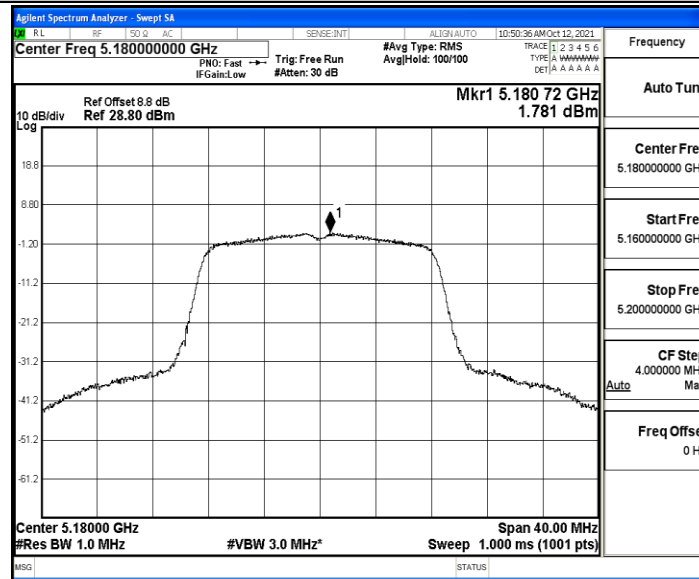


11A_Ant1_5200

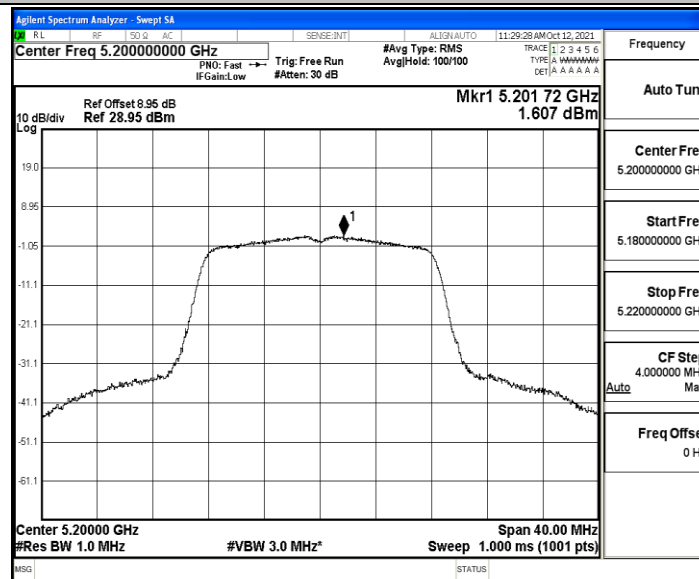


11A_Ant1_5240

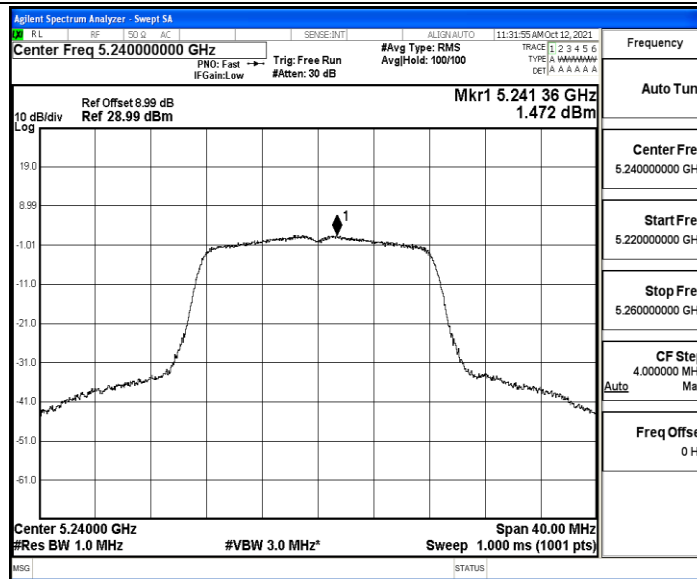

11N20SISO_Ant1_5180

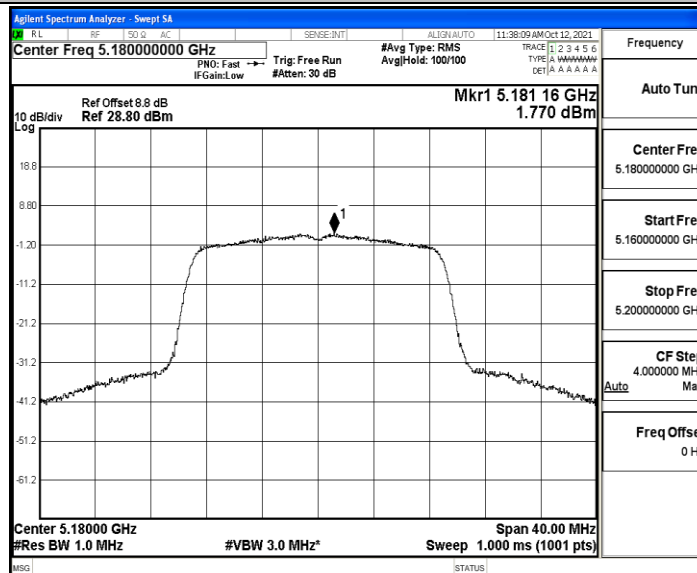


11N20SISO_Ant1_5200

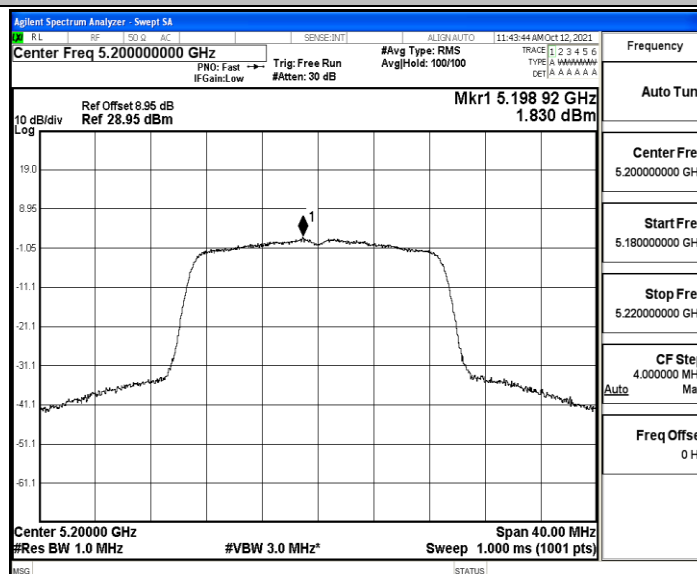





11N20SISO_Ant1_5240

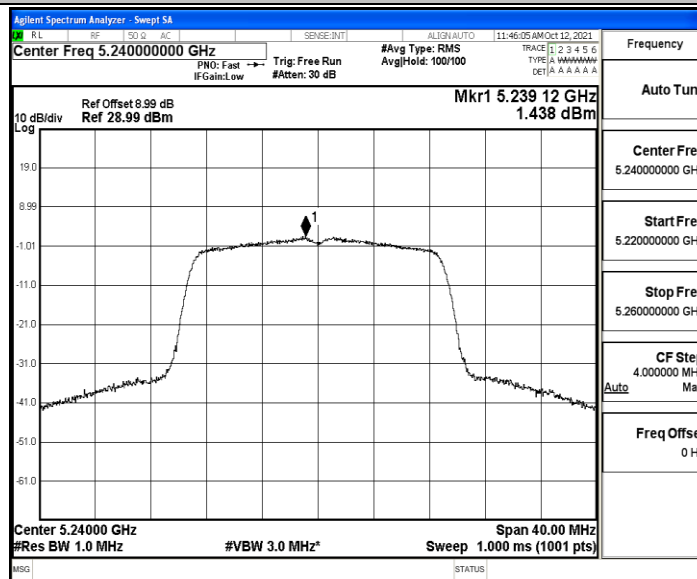


11N40SISO_Ant1_5190

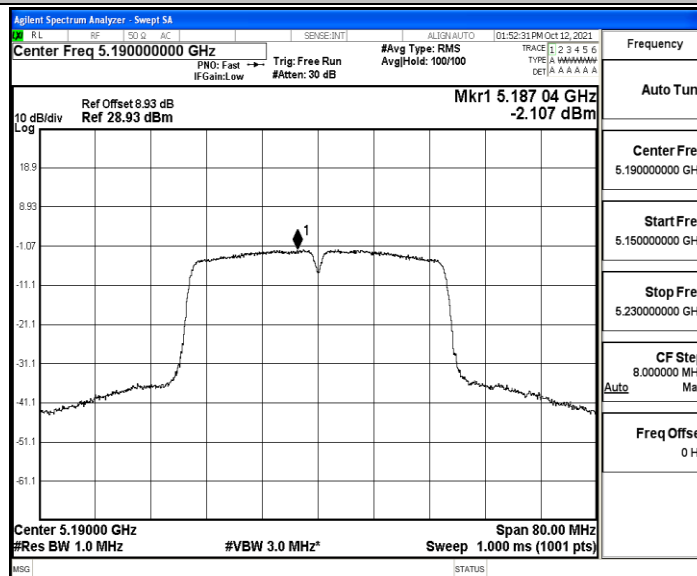


11N40SISO_Ant1_5230

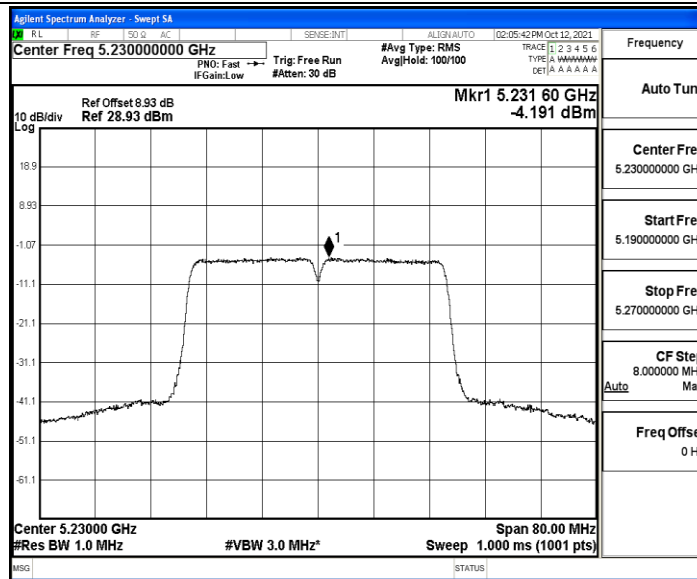

11AC20SISO_Ant1_5180

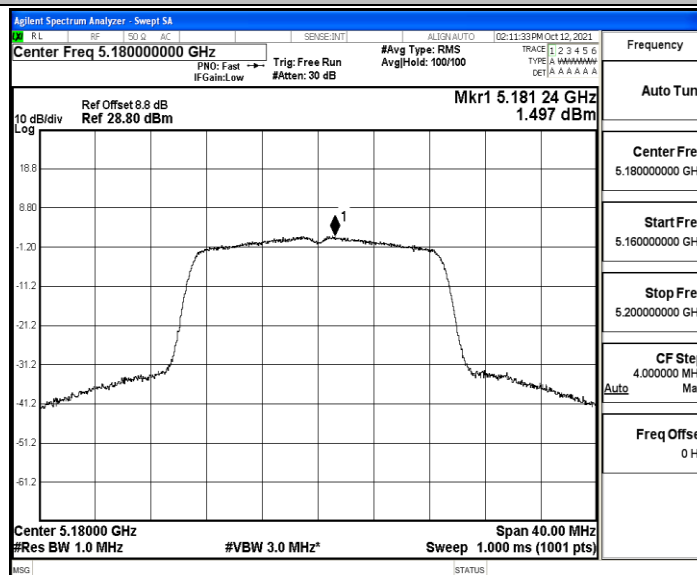


11AC20SISO_Ant1_5200

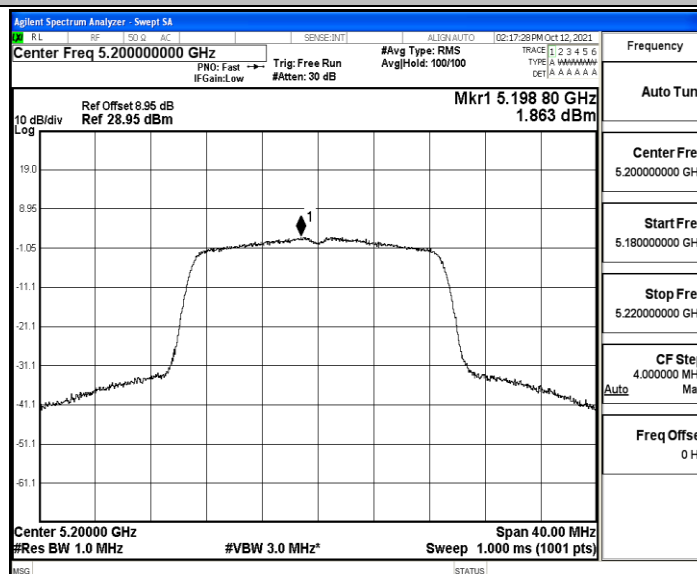





11AC20SISO_Ant1_5240

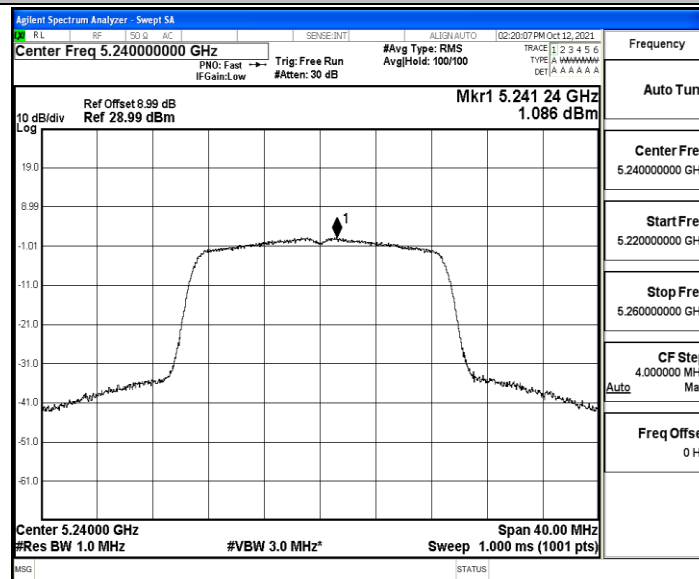


11AC40SISO_Ant1_5190

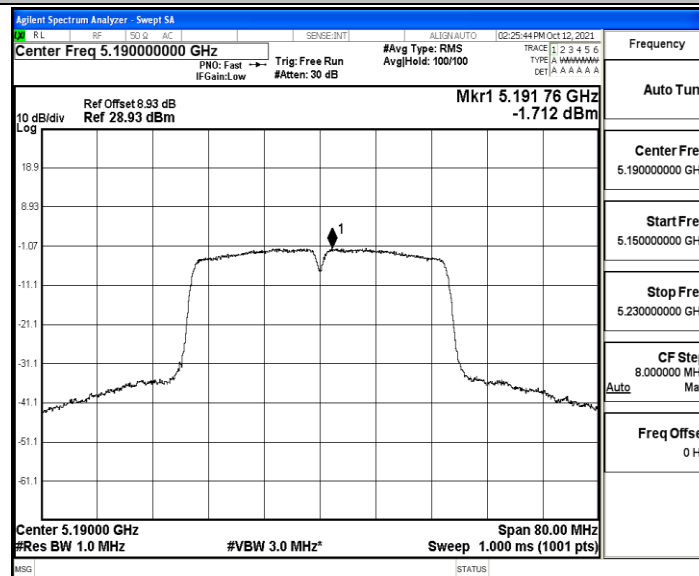

11AC40SISO_Ant1_5230

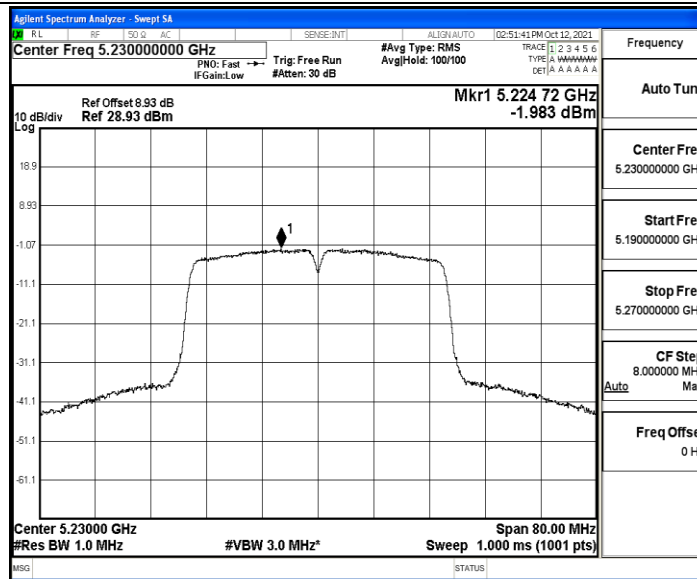

11AC80SISO_Ant1_5210

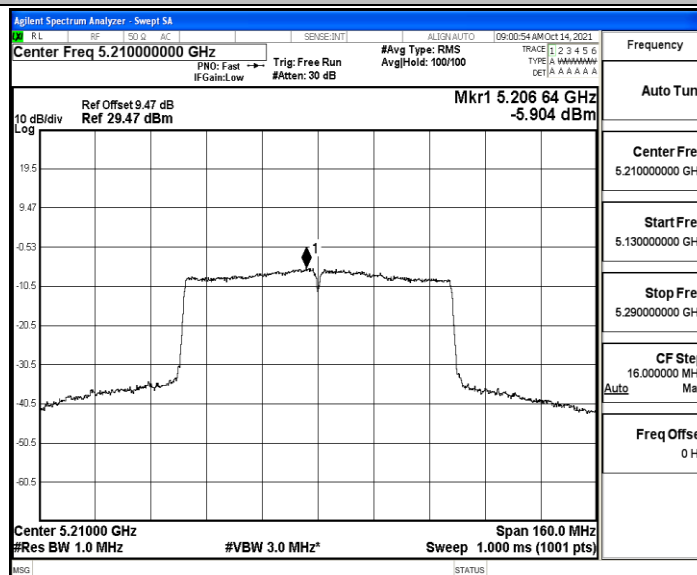



D.4 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5180	AV	4500.000	-48.03	≤-41.20	47.17	≤54	PASS
				AV	5149.600	-44.28	≤-41.20	50.92	≤54	PASS
				AV	5150.000	-44.23	≤-41.20	50.97	≤54	PASS
				Peak	4500.000	-39.56	≤-21.20	55.64	≤68.2	PASS
				Peak	5139.100	-34.62	≤-21.20	60.58	≤68.2	PASS
				Peak	5150.000	-36.48	≤-21.20	58.72	≤68.2	PASS
		High	5240	AV	5350.000	-46.04	≤-41.20	49.16	≤54	PASS
				AV	5369.760	-45.68	≤-41.20	49.52	≤54	PASS
				AV	5460.000	-46.33	≤-41.20	48.87	≤54	PASS
				Peak	5350.000	-36.61	≤-21.20	58.59	≤68.2	PASS
				Peak	5355.120	-35.7	≤-21.20	59.50	≤68.2	PASS
				Peak	5460.000	-37.65	≤-21.20	57.55	≤68.2	PASS
11N20SIS O	Ant1	Low	5180	AV	4500.000	-48.02	≤-41.20	47.18	≤54	PASS
				AV	5149.600	-44.18	≤-41.20	51.02	≤54	PASS
				AV	5150.000	-44.13	≤-41.20	51.07	≤54	PASS
				Peak	4500.000	-39.21	≤-21.20	55.99	≤68.2	PASS
				Peak	5146.100	-33.92	≤-21.20	61.28	≤68.2	PASS
				Peak	5150.000	-35.89	≤-21.20	59.31	≤68.2	PASS
		High	5240	AV	5350.000	-46.01	≤-41.20	49.19	≤54	PASS
				AV	5370.000	-45.66	≤-41.20	49.54	≤54	PASS
				AV	5460.000	-46.33	≤-41.20	48.87	≤54	PASS
				Peak	5350.000	-37.57	≤-21.20	57.63	≤68.2	PASS
				Peak	5363.760	-35.81	≤-21.20	59.39	≤68.2	PASS
				Peak	5460.000	-38.15	≤-21.20	57.05	≤68.2	PASS
11N40SIS O	Ant1	Low	5190	AV	4500.000	-47.85	≤-41.20	47.35	≤54	PASS
				AV	5149.600	-45.45	≤-41.20	49.75	≤54	PASS
				AV	5150.000	-45.42	≤-41.20	49.78	≤54	PASS
				Peak	4500.000	-40.14	≤-21.20	55.06	≤68.2	PASS
				Peak	5147.500	-36.34	≤-21.20	58.86	≤68.2	PASS
				Peak	5150.000	-35.43	≤-21.20	59.77	≤68.2	PASS
		High	5230	AV	5350.000	-46.41	≤-41.20	48.79	≤54	PASS
				AV	5359.900	-46.1	≤-41.20	49.10	≤54	PASS
				AV	5460.000	-46.61	≤-41.20	48.59	≤54	PASS
				Peak	5350.000	-38.25	≤-21.20	56.95	≤68.2	PASS
				Peak	5441.800	-36.02	≤-21.20	59.18	≤68.2	PASS
				Peak	5460.000	-38.52	≤-21.20	56.68	≤68.2	PASS



11AC20SI SO	Ant1	Low	5180	AV	4500.000	-47.98	≤ -41.20	47.22	≤ 54	PASS
				AV	5149.600	-44.25	≤ -41.20	50.95	≤ 54	PASS
				AV	5150.000	-44.21	≤ -41.20	50.99	≤ 54	PASS
				Peak	4500.000	-39.65	≤ -21.20	55.55	≤ 68.2	PASS
				Peak	5148.900	-35.1	≤ -21.20	60.10	≤ 68.2	PASS
				Peak	5150.000	-35.82	≤ -21.20	59.38	≤ 68.2	PASS
		High	5240	AV	5350.000	-46.01	≤ -41.20	49.19	≤ 54	PASS
				AV	5369.760	-45.61	≤ -41.20	49.59	≤ 54	PASS
				AV	5460.000	-46.4	≤ -41.20	48.80	≤ 54	PASS
				Peak	5350.000	-37.55	≤ -21.20	57.65	≤ 68.2	PASS
				Peak	5388.960	-35.13	≤ -21.20	60.07	≤ 68.2	PASS
				Peak	5460.000	-37.69	≤ -21.20	57.51	≤ 68.2	PASS
11AC40SI SO	Ant1	Low	5190	AV	4500.000	-47.87	≤ -41.20	47.33	≤ 54	PASS
				AV	5149.600	-45.37	≤ -41.20	49.83	≤ 54	PASS
				AV	5150.000	-45.32	≤ -41.20	49.88	≤ 54	PASS
				Peak	4500.000	-38.05	≤ -21.20	57.15	≤ 68.2	PASS
				Peak	4937.500	-35.61	≤ -21.20	59.59	≤ 68.2	PASS
				Peak	5150.000	-37.24	≤ -21.20	57.96	≤ 68.2	PASS
		High	5230	AV	5350.000	-46.16	≤ -41.20	49.04	≤ 54	PASS
				AV	5359.900	-45.69	≤ -41.20	49.51	≤ 54	PASS
				AV	5460.000	-46.5	≤ -41.20	48.70	≤ 54	PASS
				Peak	5350.000	-37.74	≤ -21.20	57.46	≤ 68.2	PASS
				Peak	5390.580	-36.2	≤ -21.20	59.00	≤ 68.2	PASS
				Peak	5460.000	-38.41	≤ -21.20	56.79	≤ 68.2	PASS
11AC80SI SO	Ant1	Low	5210	AV	4500.000	-48.44	≤ -41.20	46.76	≤ 54	PASS
				AV	5148.750	-42.9	≤ -41.20	52.30	≤ 54	PASS
				AV	5150.000	-43.35	≤ -41.20	51.85	≤ 54	PASS
				Peak	4500.000	-42.03	≤ -21.20	53.17	≤ 68.2	PASS
				Peak	5146.500	-35.6	≤ -21.20	59.60	≤ 68.2	PASS
				Peak	5150.000	-38.08	≤ -21.20	57.12	≤ 68.2	PASS
		High	5210	AV	5350.000	-47.41	≤ -41.20	47.79	≤ 54	PASS
				AV	5355.840	-46.86	≤ -41.20	48.34	≤ 54	PASS
				AV	5460.000	-47.53	≤ -41.20	47.67	≤ 54	PASS
				Peak	5350.000	-42.16	≤ -21.20	53.04	≤ 68.2	PASS
				Peak	5355.280	-38.53	≤ -21.20	56.67	≤ 68.2	PASS
				Peak	5460.000	-40.27	≤ -21.20	54.93	≤ 68.2	PASS


Note:

1. The Antenna Gain is compensated in the graph.
2. For transmitters operating in 5150-5350 GHz band and 5470-5725 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.




Test Graphs


11A_Ant1_Low_5180_AV

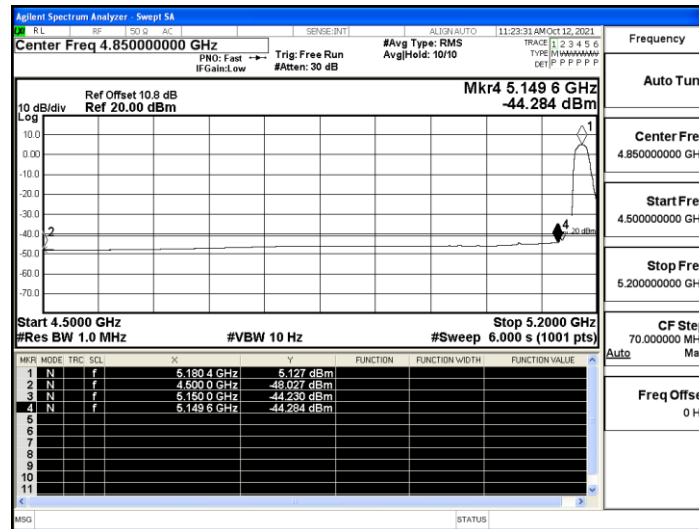


11A_Ant1_Low_5180_Peak

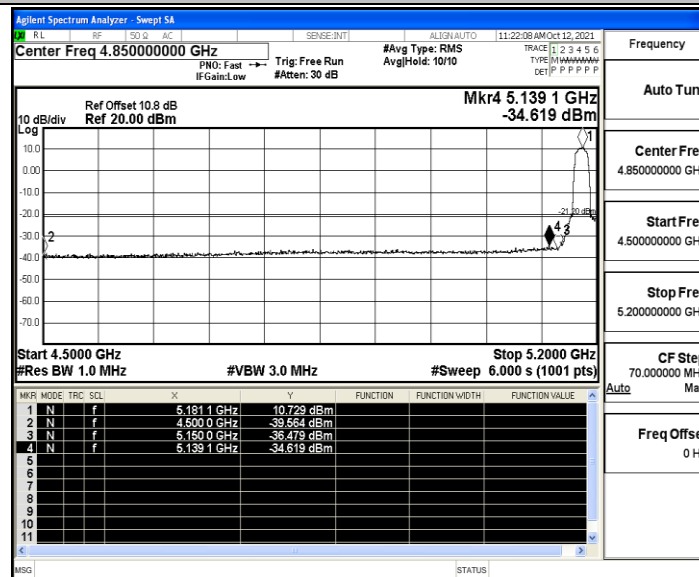


11A_Ant1_High_5240_AV

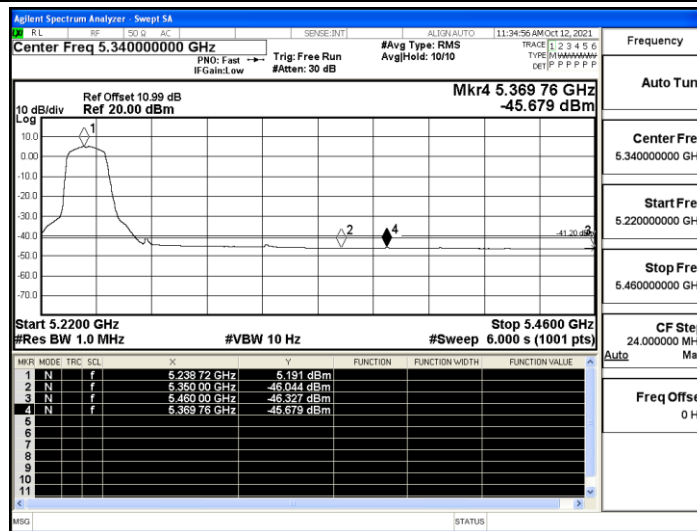


11A_Ant1_High_5240_Peak

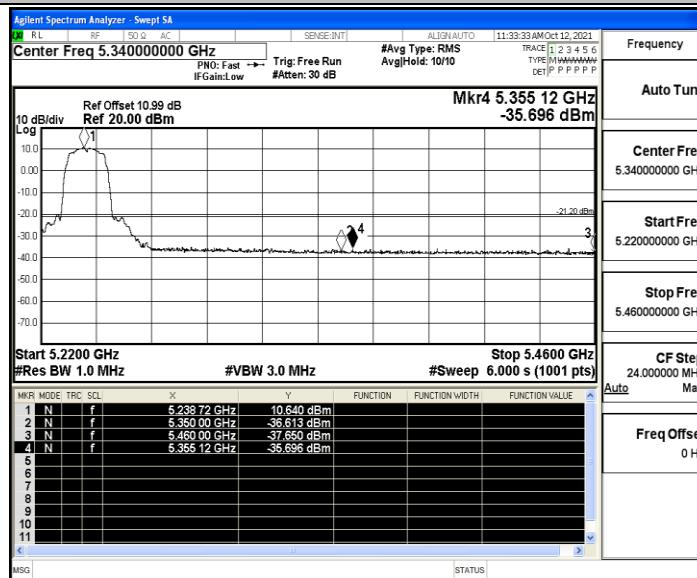


11N20SISO_Ant1_Low_5180_AV

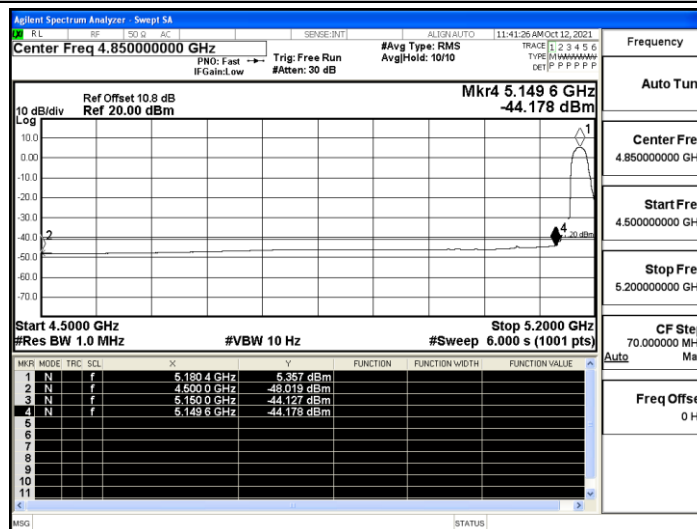


11N20SISO_Ant1_Low_5180_Peak

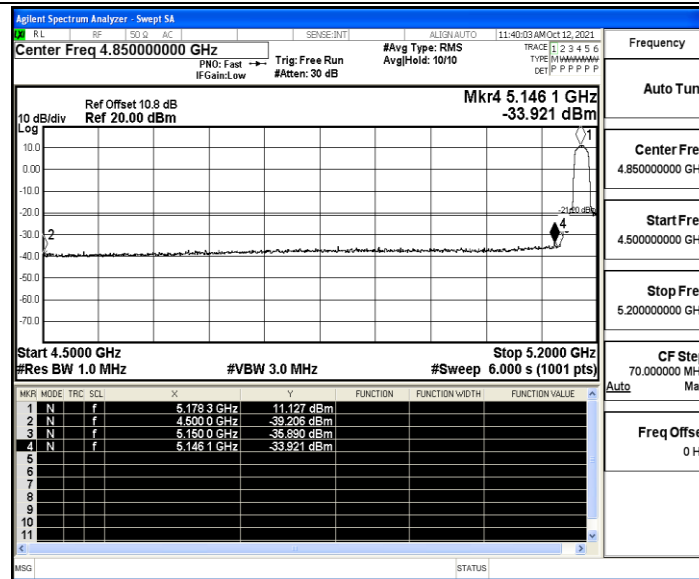


11N20SISO_Ant1_High_5240_AV

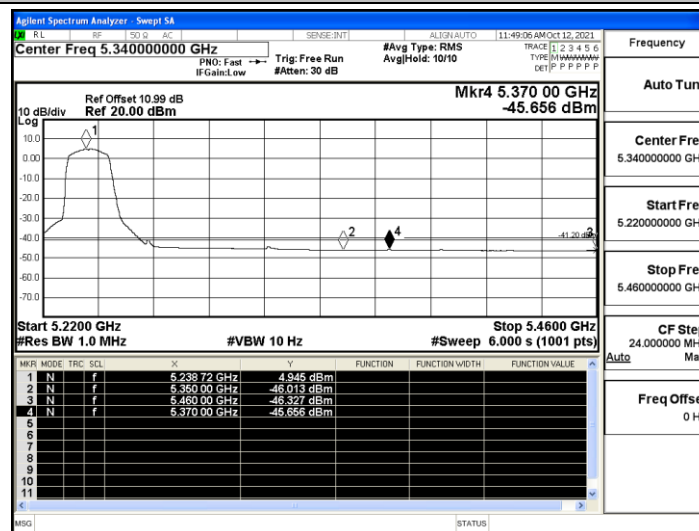


11N20SISO_Ant1_High_5240_Peak

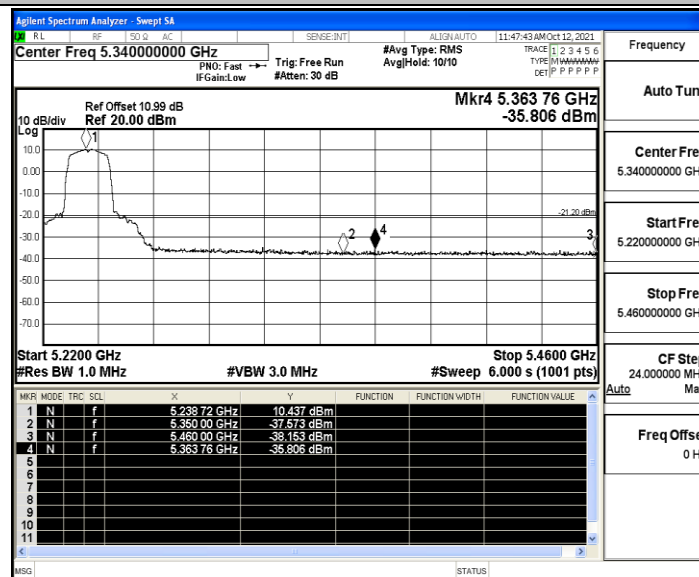


11N40SISO_Ant1_Low_5190_AV

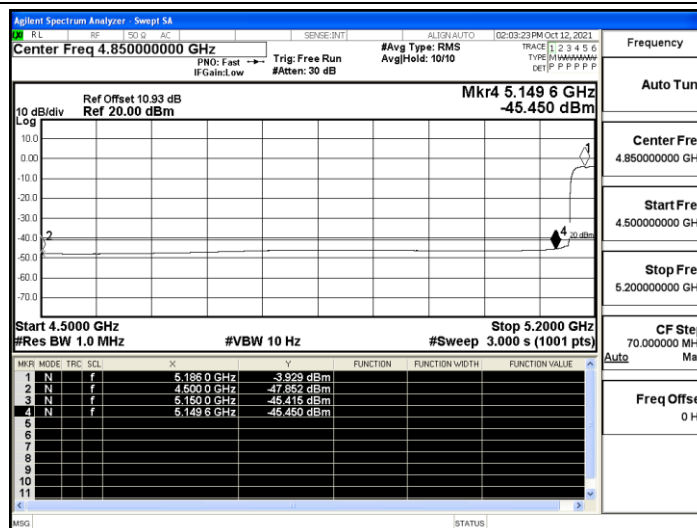


11N40SISO_Ant1_Low_5190_Peak

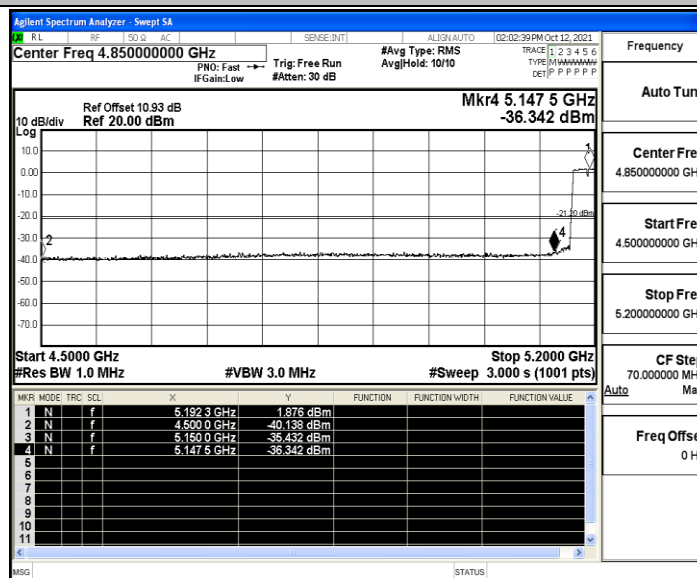


11N40SISO_Ant1_High_5230_AV

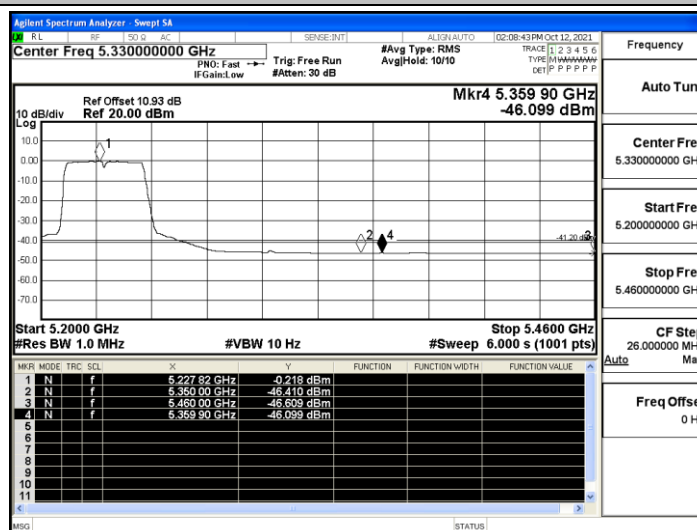


11N40SISO_Ant1_High_5230_Peak

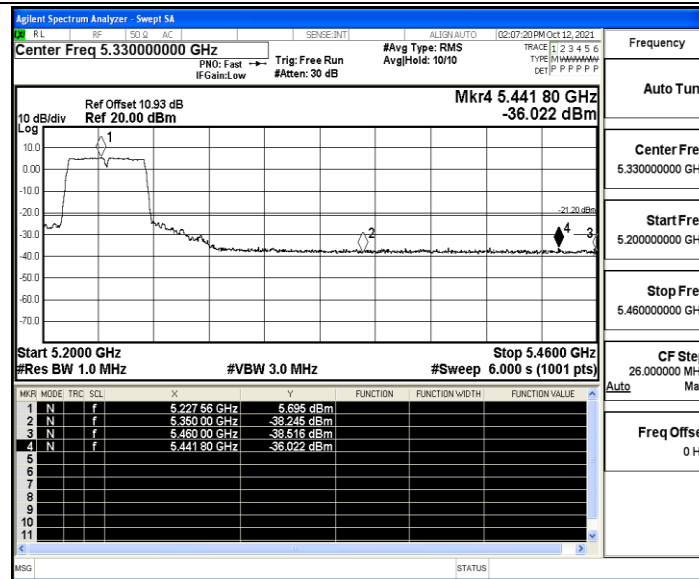


11AC20SISO_Ant1_Low_5180_AV

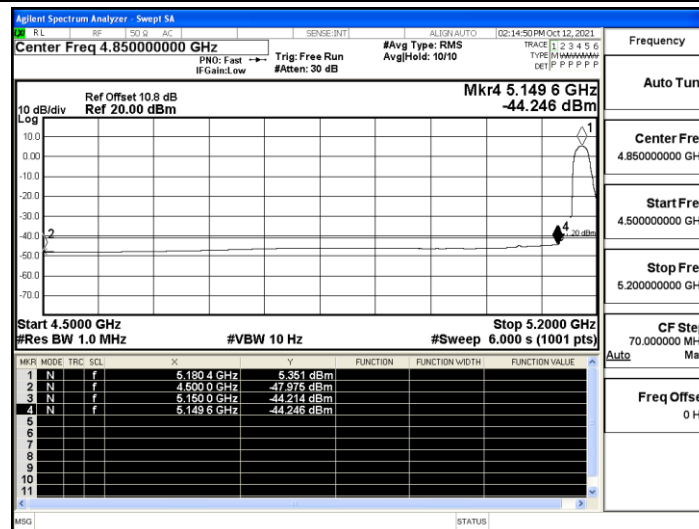


11AC20SISO_Ant1_Low_5180_Peak

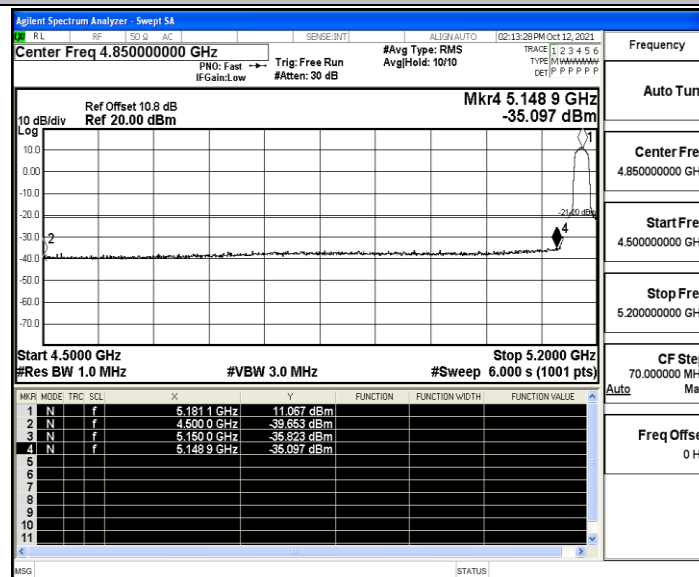


11AC20SISO_Ant1_High_5240_AV

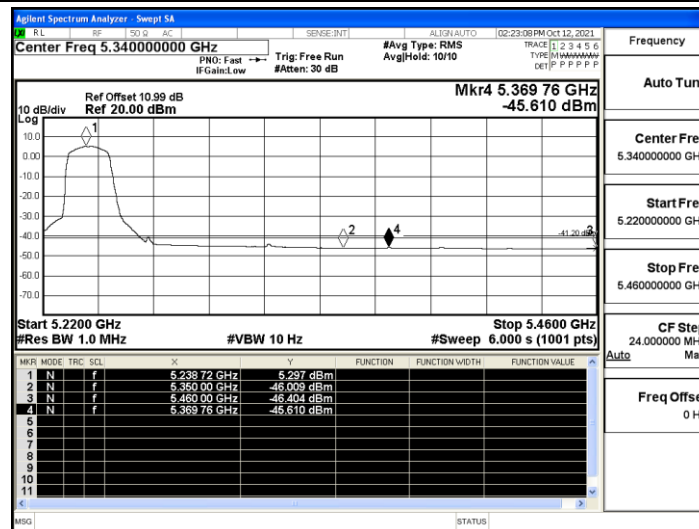


11AC20SISO_Ant1_High_5240_Peak

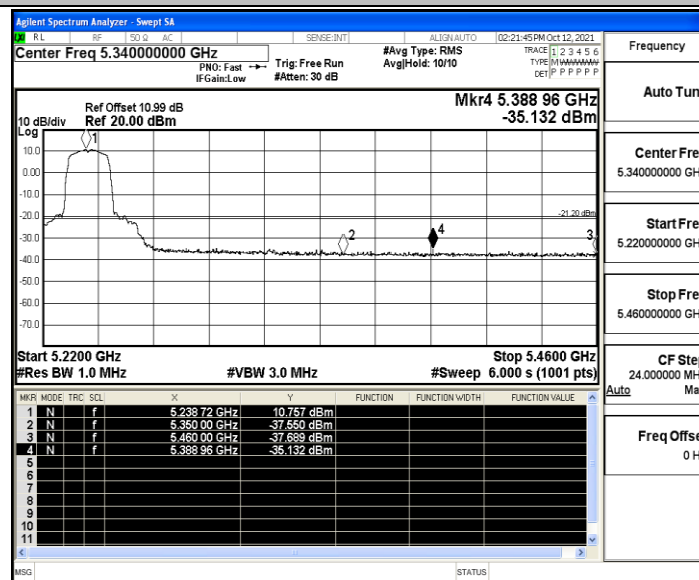


11AC40SISO_Ant1_Low_5190_AV

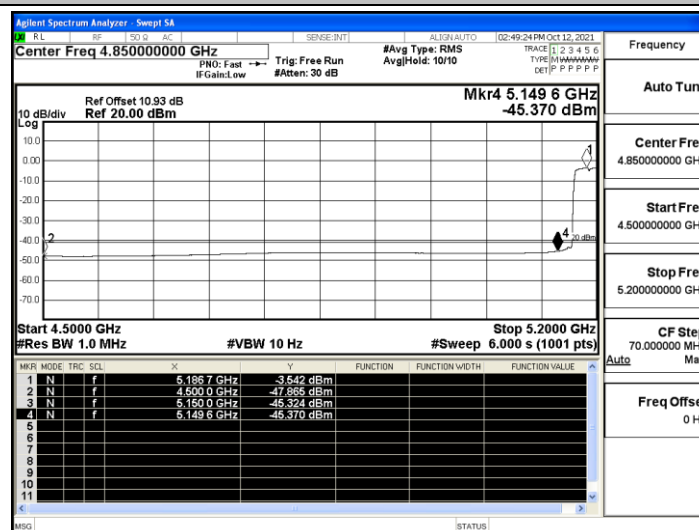


11AC40SISO_Ant1_Low_5190_Peak

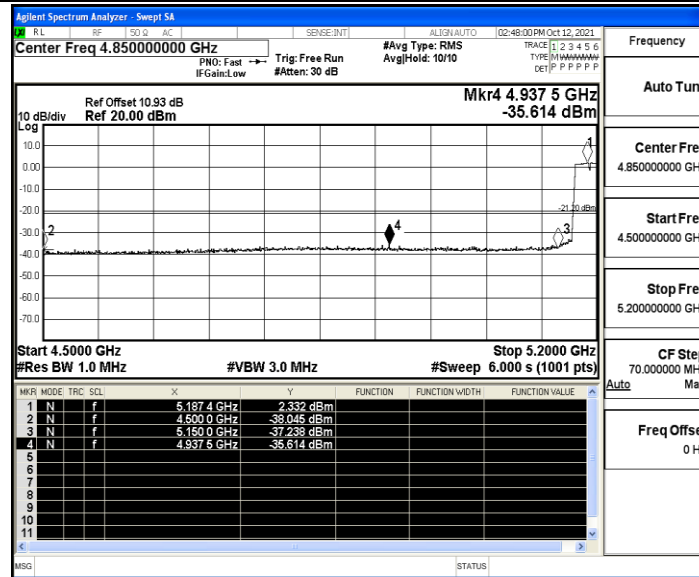


11AC40SISO_Ant1_High_5230_AV

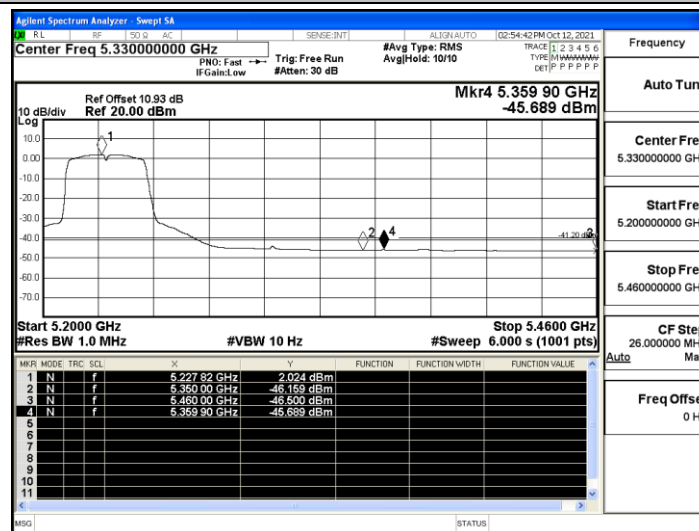


11AC40SISO_Ant1_High_5230_Peak

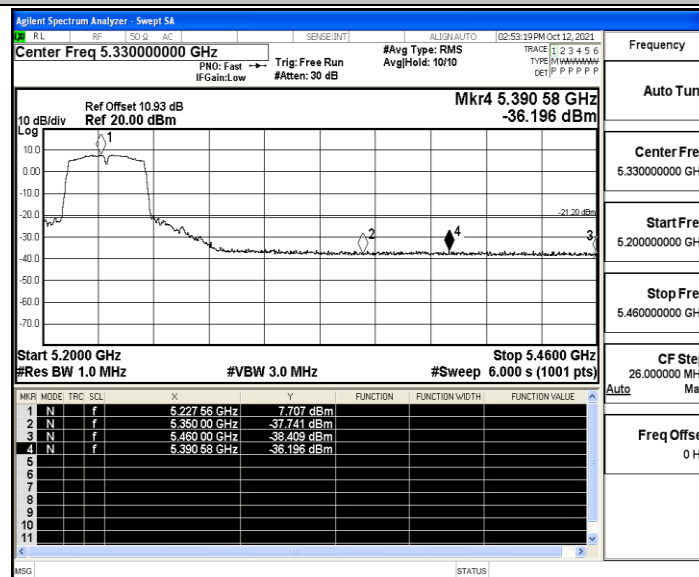


11AC80SISO_Ant1_Low_5210_AV

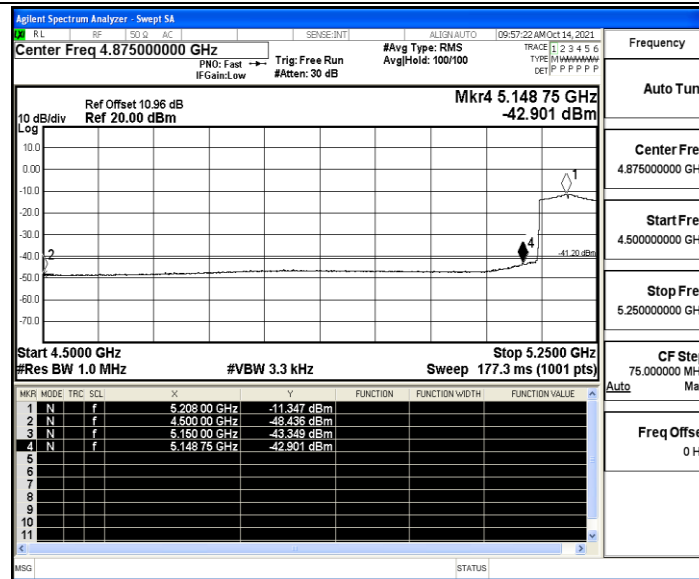

11AC80SISO_Ant1_Low_5210_Peak

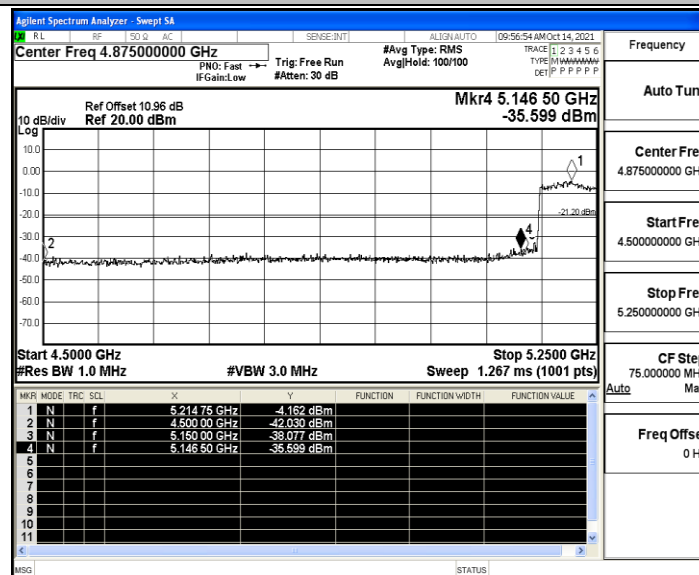


11AC80SISO_Ant1_High_5210_AV

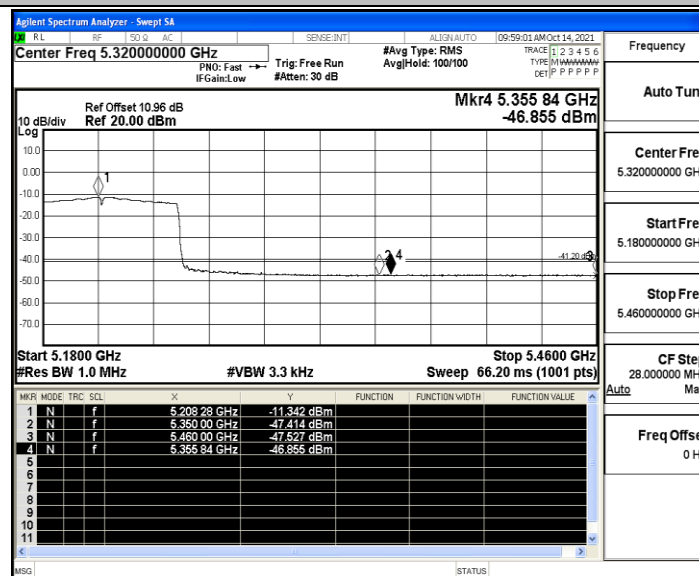



11AC80SISO_Ant1_High_5210_Peak

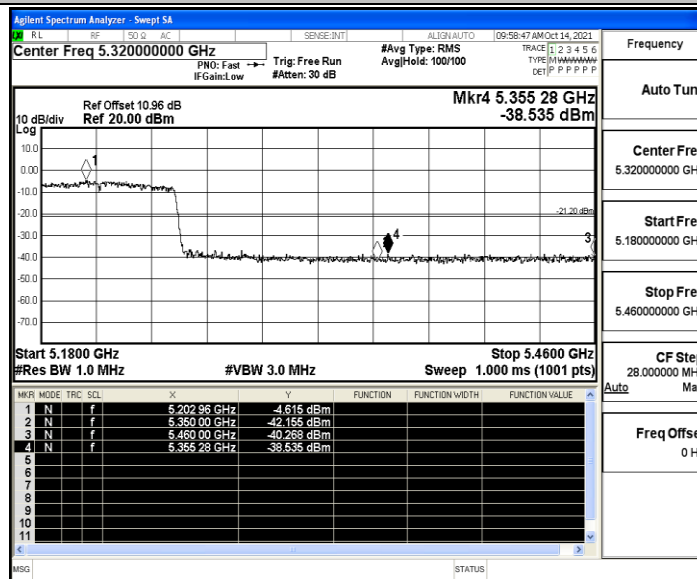



D.5 Frequency Stability

Test Result

TestMode	Antenna	Channel	Voltage					Verdict
			Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	
11A	Ant1	5180	NV	NT	-13000	-2.509653	20	PASS
			LV	NT	-14000	-2.702703	20	PASS
			HV	NT	-14000	-2.702703	20	PASS
		5200	NV	NT	-14000	-2.692308	20	PASS
			LV	NT	-14000	-2.692308	20	PASS
			HV	NT	-14000	-2.692308	20	PASS
		5240	NV	NT	-15000	-2.862595	20	PASS
			LV	NT	-14000	-2.671756	20	PASS
			HV	NT	-14000	-2.671756	20	PASS
11N20SISO	Ant1	5180	NV	NT	-14000	-2.702703	20	PASS
			LV	NT	-14000	-2.702703	20	PASS
			HV	NT	-14000	-2.702703	20	PASS
		5200	NV	NT	-14000	-2.692308	20	PASS
			LV	NT	-14000	-2.692308	20	PASS
			HV	NT	-14000	-2.692308	20	PASS
		5240	NV	NT	-14000	-2.671756	20	PASS
			LV	NT	-14000	-2.671756	20	PASS
			HV	NT	-14000	-2.671756	20	PASS
11N40SISO	Ant1	5190	NV	NT	-13000	-2.504817	20	PASS
			LV	NT	-13000	-2.504817	20	PASS
			HV	NT	-14000	-2.697495	20	PASS
		5230	NV	NT	-14000	-2.676864	20	PASS
			LV	NT	-14000	-2.676864	20	PASS
			HV	NT	-14000	-2.676864	20	PASS
11AC20SISO	Ant1	5180	NV	NT	-14000	-2.702703	20	PASS
			LV	NT	-14000	-2.702703	20	PASS
			HV	NT	-14000	-2.702703	20	PASS
		5200	NV	NT	-14000	-2.692308	20	PASS
			LV	NT	-14000	-2.692308	20	PASS
			HV	NT	-14000	-2.692308	20	PASS
		5240	NV	NT	-14000	-2.671756	20	PASS
			LV	NT	-14000	-2.671756	20	PASS
			HV	NT	-14000	-2.671756	20	PASS
11AC40SISO	Ant1	5190	NV	NT	-13000	-2.504817	20	PASS
			LV	NT	-14000	-2.697495	20	PASS



		5230	HV	NT	-14000	-2.697495	20	PASS
			NV	NT	-13000	-2.48566	20	PASS
			LV	NT	-14000	-2.676864	20	PASS
			HV	NT	-14000	-2.676864	20	PASS
11AC80SI SO	Ant1	5210	NV	NT	-7000	-1.34357	20	PASS
			LV	NT	-9000	-1.727447	20	PASS
			HV	NT	-10000	-1.919386	20	PASS

Temperature								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	-30	-14000	-2.702703	20	PASS
			NV	-20	-14000	-2.702703	20	PASS
			NV	-10	-14000	-2.702703	20	PASS
			NV	0	-14000	-2.702703	20	PASS
			NV	10	-14000	-2.702703	20	PASS
			NV	20	-15000	-2.895753	20	PASS
			NV	30	-15000	-2.895753	20	PASS
			NV	40	-14000	-2.702703	20	PASS
			NV	50	-14000	-2.702703	20	PASS
		5200	NV	-30	-15000	-2.884615	20	PASS
			NV	-20	-14000	-2.692308	20	PASS
			NV	-10	-14000	-2.692308	20	PASS
			NV	0	-14000	-2.692308	20	PASS
			NV	10	-14000	-2.692308	20	PASS
			NV	20	-15000	-2.884615	20	PASS
			NV	30	-14000	-2.692308	20	PASS
			NV	40	-15000	-2.884615	20	PASS
			NV	50	-14000	-2.692308	20	PASS
		5240	NV	-30	-14000	-2.671756	20	PASS
			NV	-20	-14000	-2.671756	20	PASS
			NV	-10	-14000	-2.671756	20	PASS
			NV	0	-14000	-2.671756	20	PASS
			NV	10	-15000	-2.862595	20	PASS
			NV	20	-14000	-2.671756	20	PASS
			NV	30	-14000	-2.671756	20	PASS
			NV	40	-14000	-2.671756	20	PASS
			NV	50	-14000	-2.671756	20	PASS
11N20SIS O	Ant1	5180	NV	-30	-14000	-2.702703	20	PASS
			NV	-20	-14000	-2.702703	20	PASS
			NV	-10	-14000	-2.702703	20	PASS
			NV	0	-14000	-2.702703	20	PASS
			NV	10	-14000	-2.702703	20	PASS



			NV	20	-14000	-2.702703	20	PASS
			NV	30	-14000	-2.702703	20	PASS
			NV	40	-14000	-2.702703	20	PASS
			NV	50	-14000	-2.702703	20	PASS
		5200	NV	-30	-14000	-2.692308	20	PASS
			NV	-20	-14000	-2.692308	20	PASS
			NV	-10	-14000	-2.692308	20	PASS
			NV	0	-14000	-2.692308	20	PASS
			NV	10	-14000	-2.692308	20	PASS
			NV	20	-14000	-2.692308	20	PASS
			NV	30	-14000	-2.692308	20	PASS
			NV	40	-14000	-2.692308	20	PASS
			NV	50	-14000	-2.692308	20	PASS
		5240	NV	-30	-14000	-2.671756	20	PASS
			NV	-20	-14000	-2.671756	20	PASS
			NV	-10	-14000	-2.671756	20	PASS
			NV	0	-14000	-2.671756	20	PASS
			NV	10	-14000	-2.671756	20	PASS
			NV	20	-14000	-2.671756	20	PASS
			NV	30	-14000	-2.671756	20	PASS
			NV	40	-14000	-2.671756	20	PASS
			NV	50	-14000	-2.671756	20	PASS
11N40SIS O	Ant1	5190	NV	-30	-14000	-2.697495	20	PASS
			NV	-20	-14000	-2.697495	20	PASS
			NV	-10	-14000	-2.697495	20	PASS
			NV	0	-14000	-2.697495	20	PASS
			NV	10	-14000	-2.697495	20	PASS
			NV	20	-14000	-2.697495	20	PASS
			NV	30	-14000	-2.697495	20	PASS
			NV	40	-14000	-2.697495	20	PASS
			NV	50	-14000	-2.697495	20	PASS
		5230	NV	-30	-14000	-2.676864	20	PASS
			NV	-20	-14000	-2.676864	20	PASS
			NV	-10	-14000	-2.676864	20	PASS
			NV	0	-14000	-2.676864	20	PASS
			NV	10	-14000	-2.676864	20	PASS
			NV	20	-14000	-2.676864	20	PASS
			NV	30	-14000	-2.676864	20	PASS
			NV	40	-14000	-2.676864	20	PASS
			NV	50	-14000	-2.676864	20	PASS
11AC20SI SO	Ant1	5180	NV	-30	-14000	-2.702703	20	PASS
			NV	-20	-14000	-2.702703	20	PASS
			NV	-10	-14000	-2.702703	20	PASS



			NV	0	-14000	-2.702703	20	PASS
			NV	10	-14000	-2.702703	20	PASS
			NV	20	-14000	-2.702703	20	PASS
			NV	30	-14000	-2.702703	20	PASS
			NV	40	-14000	-2.702703	20	PASS
			NV	50	-14000	-2.702703	20	PASS
		5200	NV	-30	-14000	-2.692308	20	PASS
			NV	-20	-14000	-2.692308	20	PASS
			NV	-10	-14000	-2.692308	20	PASS
			NV	0	-14000	-2.692308	20	PASS
			NV	10	-14000	-2.692308	20	PASS
			NV	20	-14000	-2.692308	20	PASS
			NV	30	-14000	-2.692308	20	PASS
			NV	40	-14000	-2.692308	20	PASS
			NV	50	-14000	-2.692308	20	PASS
		5240	NV	-30	-14000	-2.671756	20	PASS
			NV	-20	-14000	-2.671756	20	PASS
			NV	-10	-14000	-2.671756	20	PASS
			NV	0	-14000	-2.671756	20	PASS
			NV	10	-14000	-2.671756	20	PASS
			NV	20	-14000	-2.671756	20	PASS
			NV	30	-14000	-2.671756	20	PASS
			NV	40	-14000	-2.671756	20	PASS
			NV	50	-14000	-2.671756	20	PASS
11AC40SI SO	Ant1	5190	NV	-30	-14000	-2.697495	20	PASS
			NV	-20	-14000	-2.697495	20	PASS
			NV	-10	-14000	-2.697495	20	PASS
			NV	0	-14000	-2.697495	20	PASS
			NV	10	-14000	-2.697495	20	PASS
			NV	20	-14000	-2.697495	20	PASS
			NV	30	-14000	-2.697495	20	PASS
			NV	40	-14000	-2.697495	20	PASS
			NV	50	-14000	-2.697495	20	PASS
		5230	NV	-30	-14000	-2.676864	20	PASS
			NV	-20	-14000	-2.676864	20	PASS
			NV	-10	-14000	-2.676864	20	PASS
			NV	0	-14000	-2.676864	20	PASS
			NV	10	-14000	-2.676864	20	PASS
			NV	20	-14000	-2.676864	20	PASS
			NV	30	-14000	-2.676864	20	PASS
			NV	40	-14000	-2.676864	20	PASS
			NV	50	-14000	-2.676864	20	PASS
11AC80SI	Ant1	5210	NV	-30	-11000	-2.111324	20	PASS



SO			NV	-20	-12000	-2.303263	20	PASS
			NV	-10	-12000	-2.303263	20	PASS
			NV	0	-13000	-2.495202	20	PASS
			NV	10	-13000	-2.495202	20	PASS
			NV	20	-14000	-2.68714	20	PASS
			NV	30	-14000	-2.68714	20	PASS
			NV	40	-15000	-2.879079	20	PASS
			NV	50	-15000	-2.879079	20	PASS




D.6 Duty Cycle


Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11A	Ant1	5180	30.00	30.00	100.00	---	PASS
		5200	30.00	30.00	100.00	---	PASS
		5240	30.00	30.00	100.00	---	PASS
11N20SISO	Ant1	5180	30.00	30.00	100.00	---	PASS
		5200	30.00	30.00	100.00	---	PASS
		5240	30.00	30.00	100.00	---	PASS
11N40SISO	Ant1	5190	30.00	30.00	100.00	---	PASS
		5230	30.00	30.00	100.00	---	PASS
11AC20SISO	Ant1	5180	30.00	30.00	100.00	---	PASS
		5200	30.00	30.00	100.00	---	PASS
		5240	30.00	30.00	100.00	---	PASS
11AC40SISO	Ant1	5190	30.00	30.00	100.00	---	PASS
		5230	30.00	30.00	100.00	---	PASS
11AC80SISO	Ant1	5210	30.00	30.00	100.00	---	PASS




Test Graphs

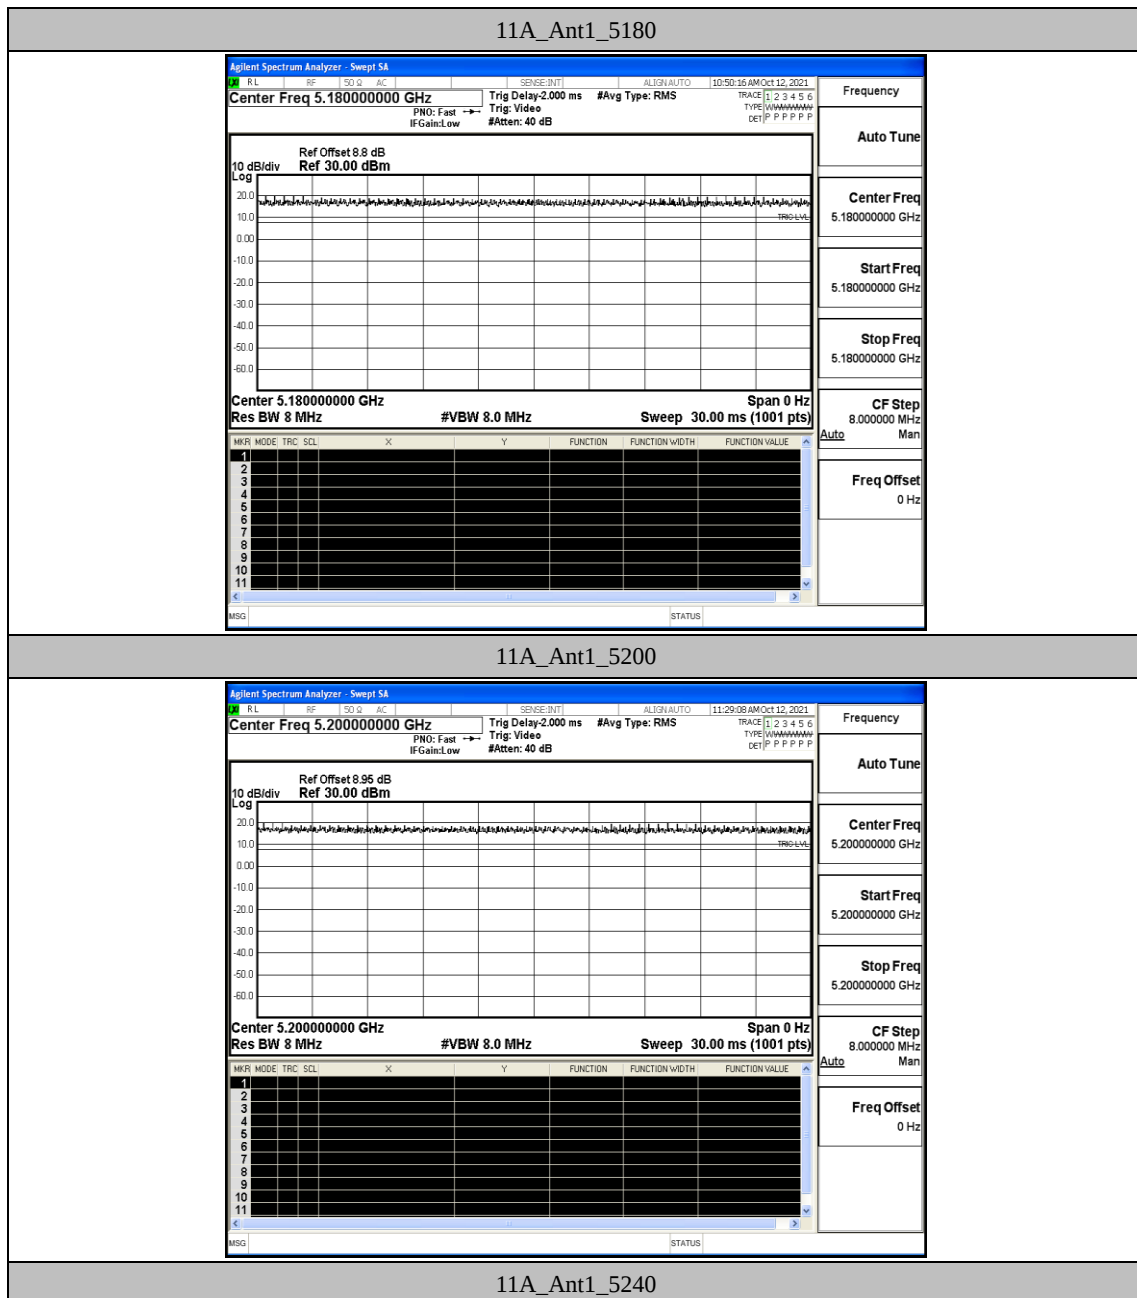

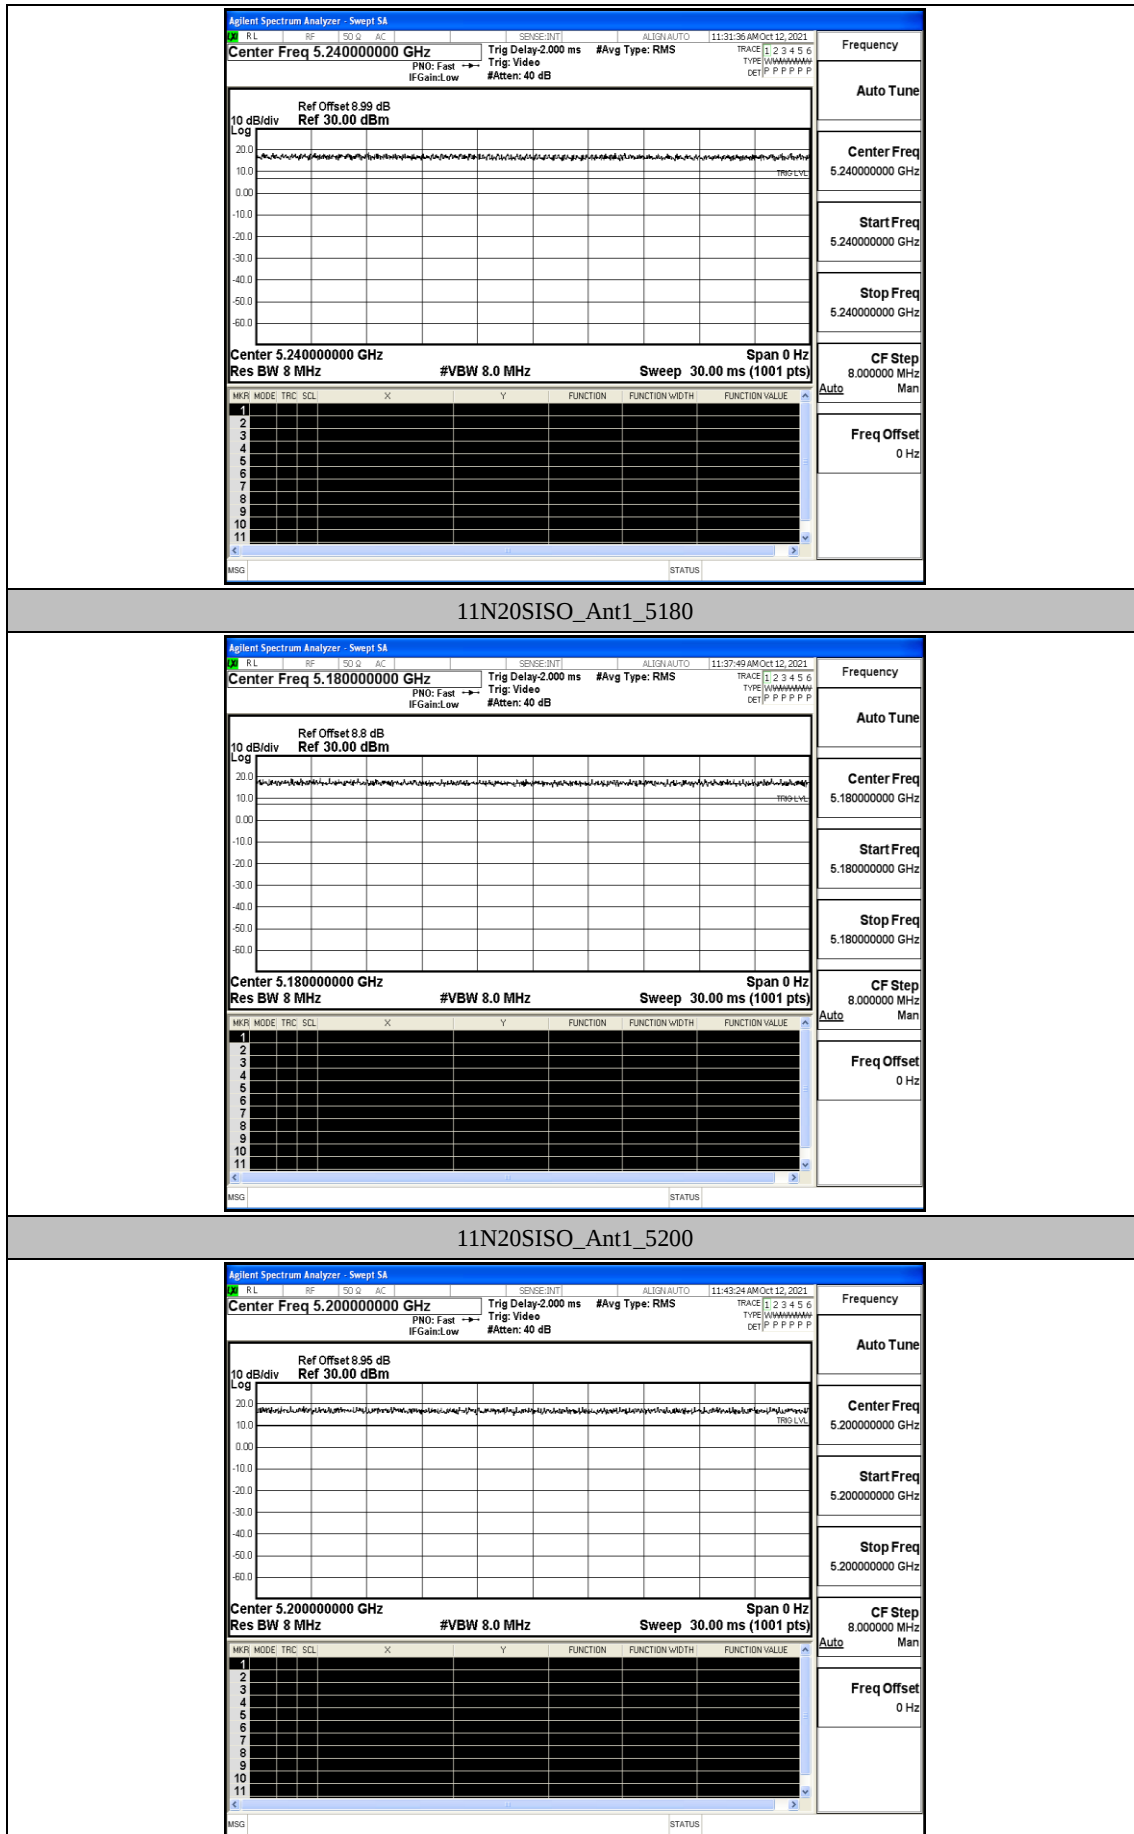





11N20SISO_Ant1_5240

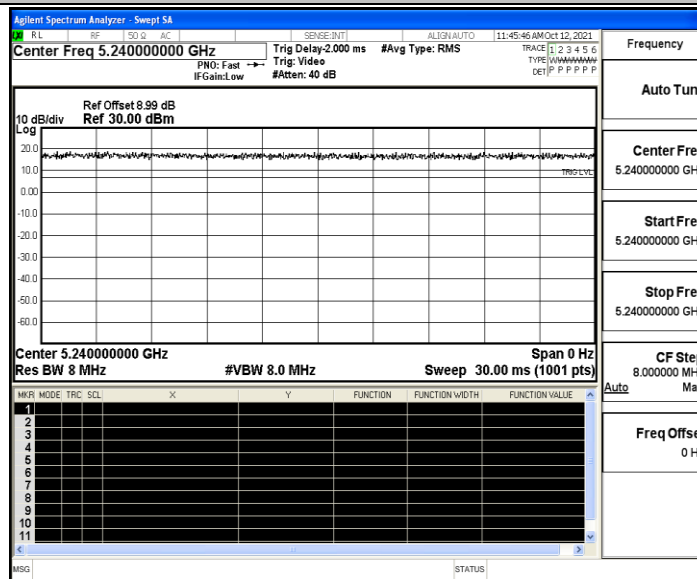


11N40SISO_Ant1_5190

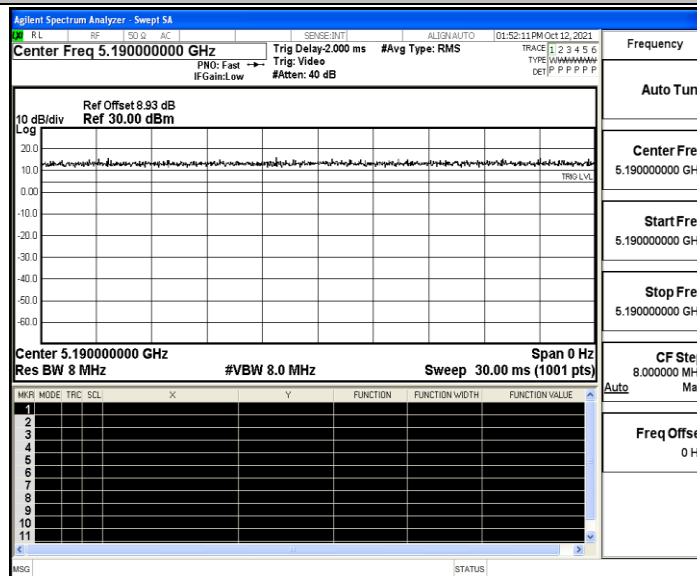


11N40SISO_Ant1_5230

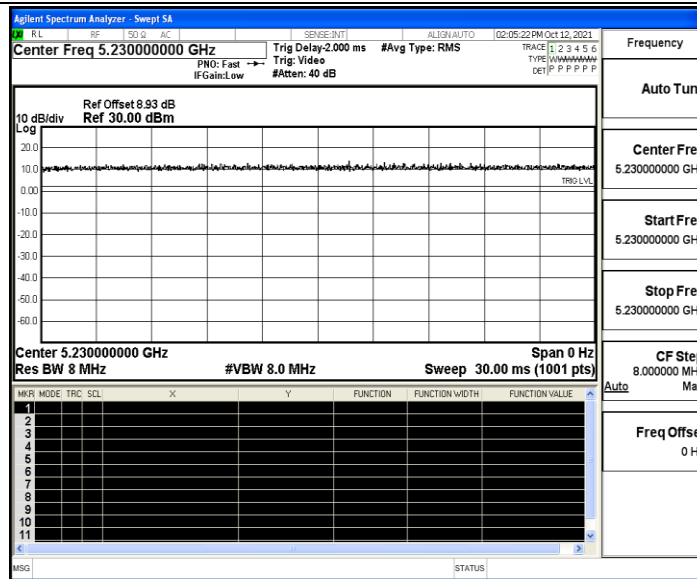

11AC20SISO_Ant1_5180

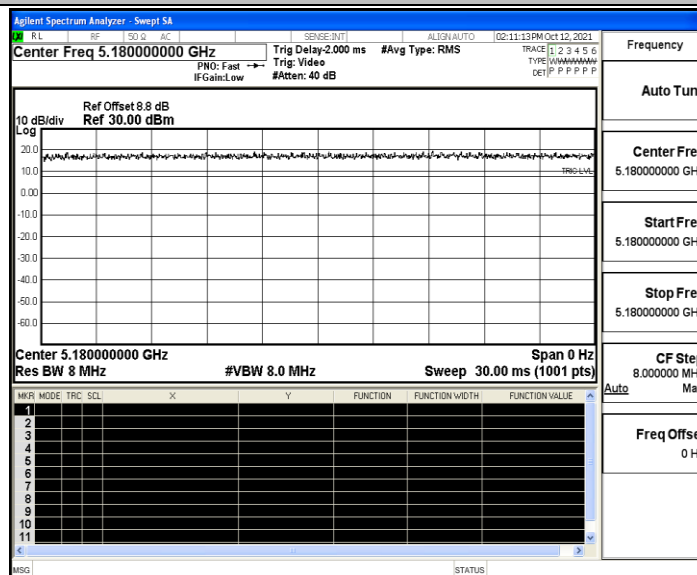


11AC20SISO_Ant1_5200

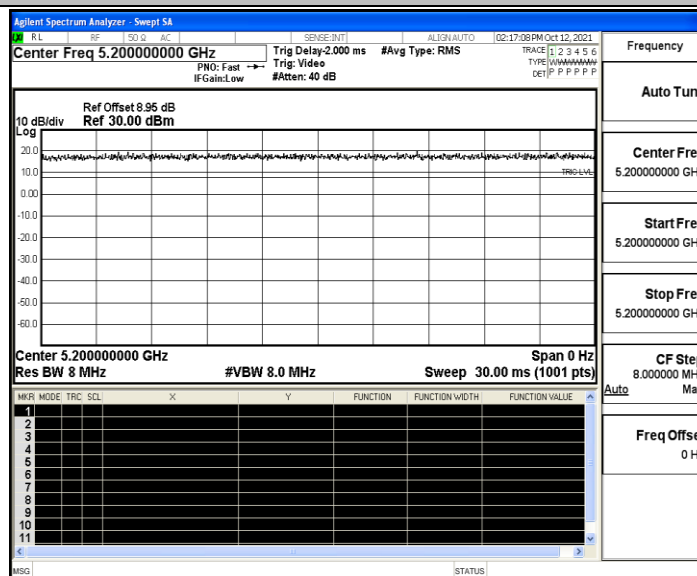





11AC20SISO_Ant1_5240

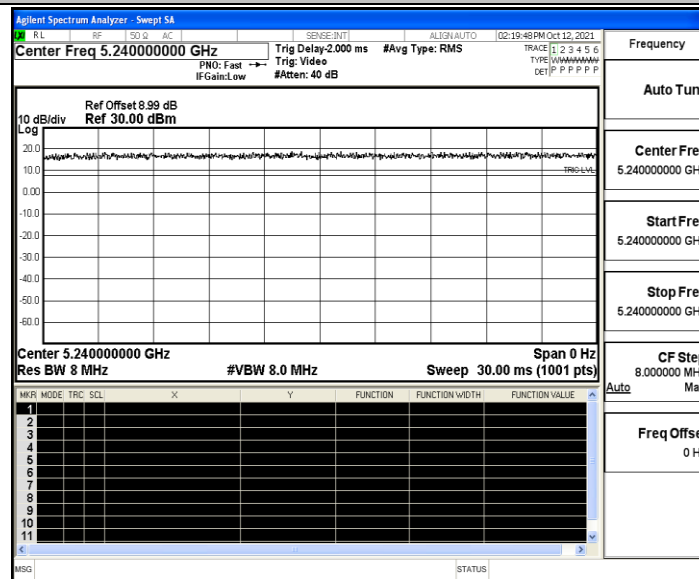

11AC40SISO_Ant1_5190

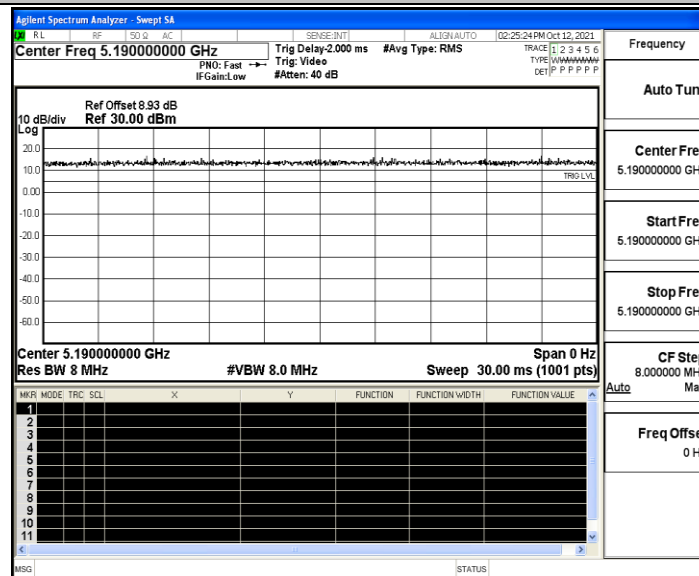

11AC40SISO_Ant1_5230

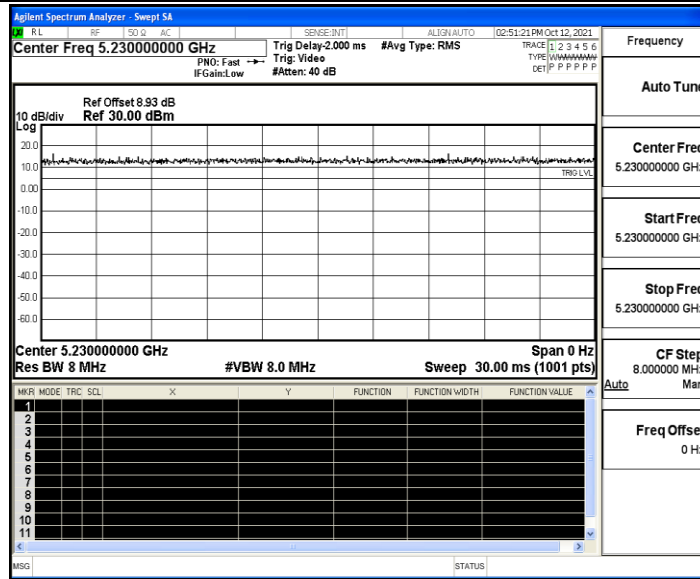

11AC80SISO_Ant1_5210

