

CENTRE OF TESTING SERVICE INTERNATIONAL

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID TEST REPORT

TEST REPORT NUMBER: CGZ3170317-00356-EF



CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

FCC ID:2AFPL-WNVR-20B-41







	TEST REPORT For FCC ID
	47 CFR PART 15 OCT, 2016
Report Reference No	·
Date of issue	29 March 2017
Testing Laboratory Name	CENTRE OF TESTING SERVICE CO., LTD.
Address	A101,No.65,Zhuji Highway,Tianhe District,Guangzhou, China
Testing location/ procedure	Full application of Harmonised standards ■
	Partial application of Harmonised standards \square
	Other standard testing method \square
Applicant's name	Guangzhou Juan Optical & Electronical Tech Joint Stock Co.,LTD
Address	NO.9, street 3, HengLing industrial zone, Tangdong, tianhe district, Guangzhou, China
Test specification	
Standard	··· 47 CFR PART 15 OCT, 2016
Test Report Form No	CTSEMC-1.0
TRF Originator	CENTRE OF TESTING SERVICE CO., LTD.
Master TRF	Dated 2009-01
CENTRE OF TESTING SERVICE	CO., LTD. All rights reserved.
CENTRE OF TESTING SERVICE (material. CENTRE OF TESTING S	d in whole or in part for non-commercial purposes as long as the CO., LTD. is acknowledged as copyright owner and source of the ERVICE CO., LTD takes no responsibility for and will not assume liability der's interpretation of the reproduced material due to its placement and
Test item description	: Network Video Recorder
Trade Mark	JUAN
Manufacturer	Guangzhou Juan Optical & Electronical Tech Joint Stock Co.,LTD
Model/Type reference	WNVR-20B-41-JUN
Ratings	DC 12V by adapter;
	Adapter Input:AC 100~240V, 50/60Hz; Output:DC 12V
Operating Frequency	802.11b/g/n(20M):2412.0 MHz~2462.0 MHz
Result	Positive

Compiled by:

Supervised by:

Approved by:

Kate zhang / Fileadministrators

Duke yang / Technique principal

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





FCCID-TEST REPORT

Test Report No. : CGZ3170317-00356-EF

29 March 2017
Date of issue

Type / Model	WNVR-20B-41-JUN
EUT	Network Video Recorder
Applicant	Guangzhou Juan Optical & Electronical Tech Joint Stock Co.,LTD
Address	NO.9, street 3, HengLing industrial zone, Tangdong, tianhe district, Guangzhou, China
Telephone	+86-020-22275999
Fax	+86-020-22647897
Contact	WenhuangLi
Manufacturer	Guangzhou Juan Optical & Electronical Tech Joint Stock Co.,LTD
Address	NO.9, street 3, HengLing industrial zone, Tangdong, tianhe district, Guangzhou, China
Telephone	+86-020-22275999
Fax	+86-020-22647897
Contact	WenhuangLi
Factory	Guangzhou Juan Optical & Electronical Tech Joint Stock Co.,LTD
Address	NO.9, street 3, HengLing industrial zone, Tangdong, tianhe district, Guangzhou, China
Telephone	+86-020-22275999
Fax	+86-020-22647897
Contact	WenhuangLi

Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





TABLE OF CONTENTS

Description	Page
1.0 TEST STANDARDS	5
2.0 SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	
3.0 EQUIPMENT UNDER TEST	5
3.1 Power supply system utilised	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	
3.4 EUT CONFIGURATION	6
4.0 TEST ENVIRONMENT	7
4.1 Address of the test laboratory	-
4.1 Address of the test laboratory	
4.3 ENVIRONMENTAL CONDITIONS	
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	
5.0 SUMMARY OF STANDARDS AND RESULTS	8
5.1.Description of Standards and Results	8
6.0 POWER LINE CONDUCTED EMISSION TEST	9
6.1.Test Equipment	o
6.2. BLOCK DIAGRAM OF TEST SETUP	9
6.3. POWER LINE CONDUCTED EMISSION TEST LIMITS	
6.4.Test Procedure	
6.5. POWER LINE CONDUCTED EMISSION TEST RESULTS	9
7.0 6DB BANDWIDTH MEASUREMENT	12
7.1 LIMITS	12
7.2 MEASUREMENT EQUIPMENT USED	12
7.3 TEST CONFIGURATION	
7.4 TEST PROCEDURE	
7.5 TEST RESULTS	
8.0 PEAK POWER	19
8.1 LIMIT	19
8.2 MEASUREMENT EQUIPMENT USED	19
8.3 TEST CONDIGURATION	
Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the is	ssuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

FCC ID:2AFPL-WNVR-20B-41



CT5

CENTRE OF TESTING SERVICE

8.4 TEST PROCEDURE	20
8.5 TEST RESULTS	20
9.0 PEAK POWER SPECTRAL DENSITY	26
9.1 LIMIT	26
9.2 MEASUREMENT EQUIPMENT USED	20
9.3 TEST CONFIGURATION	
9.4 TEST PROCEDURE	
9.5 TEST RESULTS	
10.0 BAND EDGES MEASUREMENT	33
10.1 LIMIT	33
10.2 MEASUREMENT EQUIPMENT USED	33
10.3 Test Configuration	
10.4 TEST PROCEDURE	
10.5 TEST RESULTS	
11.0 SPURIOUS EMISSIONS	40
11.1 LIMIT	40
11.2 TEST EQUIPMENT	
11.3 TEST CONFIGURATION	
11.4 TEST PROCEDURE	
11.5 TEST RESULTS	
12.0 ANTENNA REQUIREMENTS	54
12.1 STANDARD APPLICABLE	52
12.2 ANTENNA CONSTRUCTION AND DIRECTIONAL GAIN	
13.0 DEVIATION TO TEST SPECIFICATIONS	54

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





1.0 TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2016
- ■ANSI C63.10:2013

2.0 SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	17 March 2017
Testing commenced on	17~29 March 2017
Testing concluded on	29 March 2017

2.2 FINAL ASSESSMENT

The FCC requirements pertaining to the technical standards and tested operation modes are

fulfilled.

□ - **not** fulfilled.

The equipment under test

- fulfils the FCC requirements cited on page 1.
 - does not fulfil the FCC requirements cited on page 1.

3.0 EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : ■ DC 12V by Adapter;

Adapter supply by AC 120V, 60Hz

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- □ Standby
- ☐ TX- Y position
- ☐ TX- Zposition
- TX- X position

802.11b/g/n(20M):TX-X Position Low (2412.0 MHz)

TX-X Position Middle (2437.0 MHz)

TX-X Position High (2462.0 MHz)

Note:Operation mode TX -X position of EUT is the radiated test worst case. So only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF





3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description	:	Network Video Recorder
Model Number	:	WNVR-20B-41-JUN
Operation frequency	:	802.11b/g/n(20M):2412.0 MHZ~2462.0 MHz
WiFi	:	802.11:b/g/n
Modulation Technology	:	DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64QAM
		802.11b: 5.5, 2, 1 Mbps
Date Rate		802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
		802.11n20: 72Mbps

3.4.2. Tested Supporting System Details

3.4.1. Notebook

M/N	:	F83VF
S/N		N/A
Manufacturer		ASUS
Power Cord	:	Unshielded, Detachabled, 1.5m , 3Pin
FCC	:	ID

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 6 of 54





4.0 TEST ENVIRONMENT

4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on May 22, 2014.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- The black square indicates that the listed condition, standard or equipment is applicable for this report.
- The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 7 of 54







4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
	30MHz~300MHz	±3.14dB	(1)
Radiation emission (3m)	300MHz~1000MHz	±3.18dB	(1)
	1GHz~26.5GHz	±3.54dB	(1)

^{(1).} This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.0 Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION				
Description of Test Item	Standard	Results		
Conducted Emission Test	FCC Part 15 : 15.207 ANSI C63.10:2013	PASSED		
6dB Bandwidth Measurement	FCC Part 15.247(a)(2) ANSI C63.10:2013	PASSED		
Peak Power	FCC Part 15.247(b)(3)(4) ANSI C63.10:2013	PASSED		
Peak Power Spectral Density	15.247(e) Power Density ANSI C63.10:2013	PASSED		
Band edges measurement	FCC Part 15.247(d) ANSI C63.10:2013	PASSED		
Spurious Emissions	FCC Part 15: 15.209 ANSI C63.10:2013	PASSED		
Antenna Requirements	FCC Part 15: 15.203 ANSI C63.10:2013	PASSED		
N/A is an abbreviation for Not Applicable.				

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 8 of 54






6.0 Power Line Conducted Emission Test

6.1.Test Equipment

Conduc	Conducted Disturbance						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2016/11		
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2016/11		
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2016/11		
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2016/11		
5	EMI Test Software	EZ-EMC	Farad	N/A	N/A		

6.2. Block Diagram of Test Setup



(EUT: Network Video Recorder)

6.3. Power Line Conducted Emission Test Limits

Standard: FCC Part 15: 15.207, ANSI C63.10-2013

			Maximum RF Line Voltage		
	Frequency		Quasi-Peak Level Average L		
			dB(μV)	dB(μV)	
	150kHz	~ 500kHz	66 ~ 56*	56 ~ 46*	
	500kHz	~ 5MHz	56	46	
	5MHz	~ 30MHz	60	50	

Notes: 1. * Decreasing linearly with logarithm of frequency.

6.4.Test Procedure

The Adapter Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

6.5. Power Line Conducted Emission Test Results

PASSED.

The frequency range from 150KHz~30MHz is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 9 of 54

^{2.} The lower limit shall apply at the transition frequencies.

FCC ID:2AFPL-WNVR-20B-41








Test point:	L	Result:	■ - passed
Frequency range:	0.15MHz~30MHz		□ - not passed

EUT	Network Video Recorder			
Operating Condition	TX			
Test Condition	Ambient Temperature: 25°C Humidity: 56%			
Test Date:	17~29 March 2017			
Operator	Duke			
MODEL NO	WNVR-20B-41-JUN			

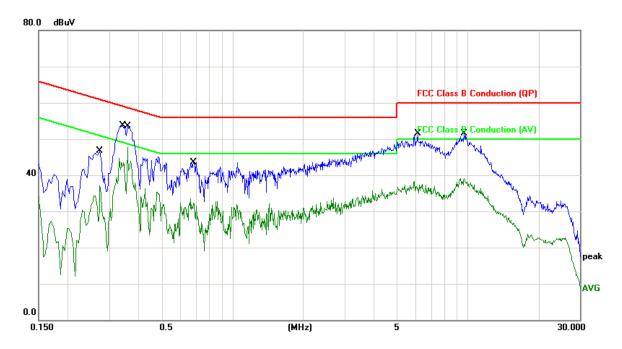

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.2740	10.21	32.75	42.96	61.00	-18.04	QP
2	0.2740	10.21	20.79	31.00	51.00	-20.00	AVG
3	0.3420	10.20	41.94	52.14	59.15	-7.01	QP
4	0.3420	10.20	32.27	42.47	49.15	-6.68	AVG
5	0.3580	10.20	41.95	52.15	58.77	-6.62	QP
6	0.3580	10.20	31.15	41.35	48.77	-7.42	AVG
7	0.6860	10.24	31.71	41.95	56.00	-14.05	QP
8	0.6860	10.24	19.95	30.19	46.00	-15.81	AVG
9	6.1340	10.86	33.79	44.65	60.00	-15.35	QP
10	6.1340	10.86	24.50	35.36	50.00	-14.64	AVG
11	9.6820	11.21	33.95	45.16	60.00	-14.84	QP
12	9.6820	11.21	25.41	36.62	50.00	-13.38	AVG
Remark:	Other frequen	icy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 10 of 54


FCC ID:2AFPL-WNVR-20B-41









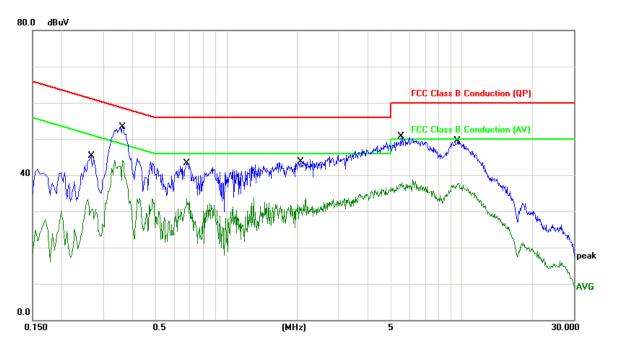

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.
	(MHz)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.2660	10.30	31.00	41.30	61.24	-19.94	QP
2	0.2660	10.30	17.68	27.98	51.24	-23.26	AVG
3	0.3620	10.31	40.09	50.40	58.68	-8.28	QP
4	0.3620	10.31	28.18	38.49	48.68	-10.19	AVG
5	0.6780	10.35	30.26	40.61	56.00	-15.39	QP
6	0.6780	10.35	16.97	27.32	46.00	-18.68	AVG
7	2.0660	10.52	29.49	40.01	56.00	-15.99	QP
8	2.0660	10.52	18.89	29.41	46.00	-16.59	AVG
9	5.5340	10.83	33.97	44.80	60.00	-15.20	QP
10	5.5340	10.83	23.56	34.39	50.00	-15.61	AVG
11	9.6060	11.12	32.98	44.10	60.00	-15.90	QP
12	9.6060	11.12	24.62	35.74	50.00	-14.26	AVG
Remark:	Other frequen	icy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 11 of 54





7.0 6dB BANDWIDTH MEASUREMENT


7.1 LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 MEASUREMENT EQUIPMENT USED

20dB Bandwidth							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03		

7.3 TEST CONFIGURATION



7.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span =1.5 times of bandwidth, Sweep = auto.
- 4. Mark the peak frequency and -6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 12 of 54



7.5 TEST RESULTS

Modulation Standard	Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (KHz)	Result
802.11b:	Low	2412	9.45		PASSED
5.5Mbps	Middle	2437	8.90	>500	PASSED
(Worst Case)	High	2462	9.06		PASSED
802.11g:	Low	2412	16.50		PASSED
54Mbps	Middle	2437	16.50	>500	PASSED
(Worst Case)	High	2462	16.50		PASSED
802.11n(20):	Low	2412	17.70		PASSED
72Mbps (Worst Case)	Middle	2437	17.65	>500	PASSED
	High	2462	17.70		PASSED


Remark:The Bandwidth is Delta 2 of following the graph. And the Delta 2 is Marker 2 subtract Marker 1.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





Test Plot

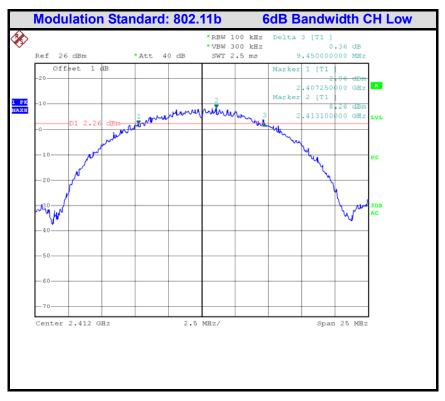



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF





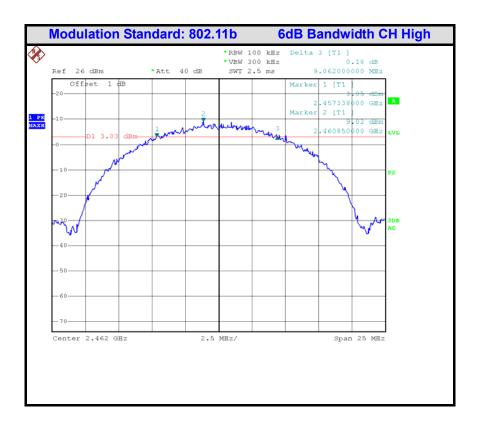

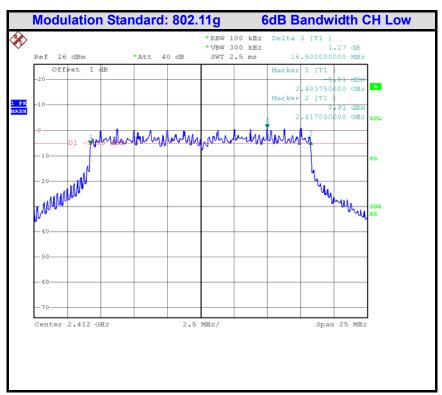

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





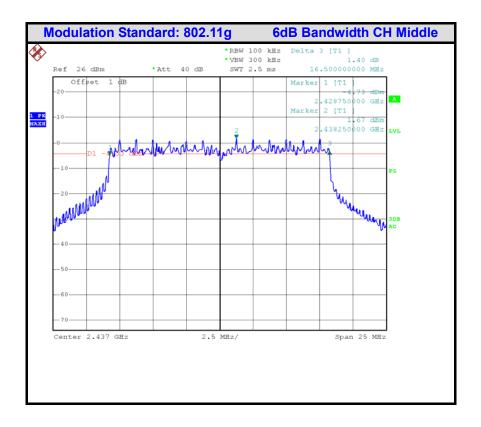

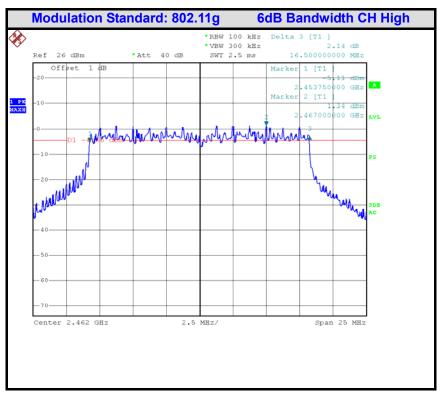

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





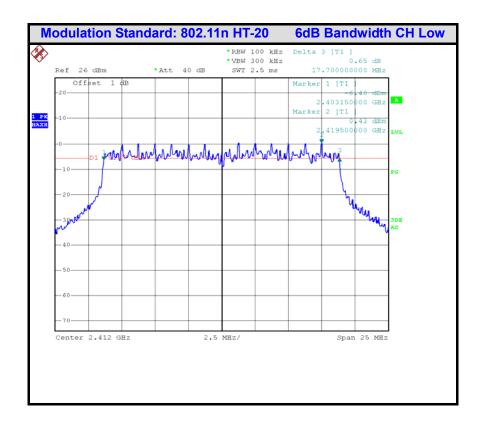

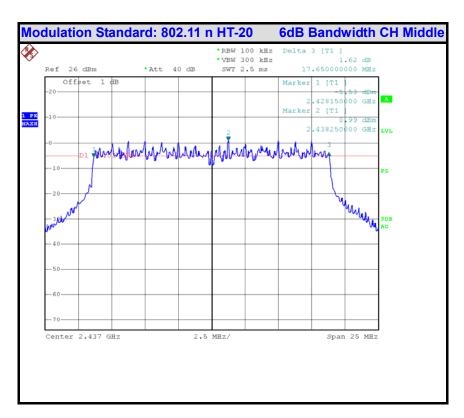

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406


E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF





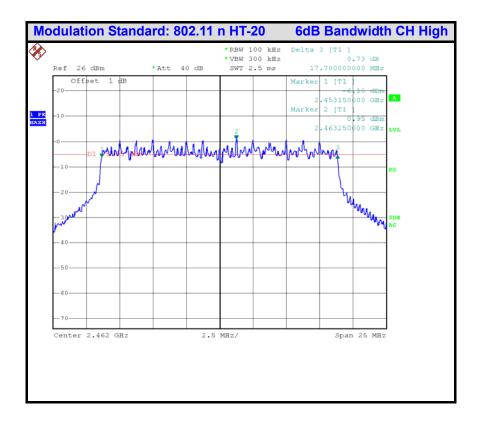

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





8.0 PEAK POWER

8.1 LIMIT


The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 MEASUREMENT EQUIPMENT USED

Peak Power								
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.			
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03			
2	Power meter	ROHDE & SCHWARZ	NRVS	842856/049	2017/03			

8.3 TEST CONDIGURATION



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 19 of 54





8.4 TEST PROCEDURE

- 1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2. Set RBW = 1MHz.
- 3. Set VBW ≥ 3MHz.
- 4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.
- 5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power Intervals, the trigger may be set to "free run".
- 6. Trace average 100 traces in power averaging mode.
- 7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

8.5 TEST RESULTS

Passed Test Data

Modulation Standard	Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
802.11b:	Low	2412	23.39		PASSED
5.5Mbps	Middle	2437	24.00		PASSED
(Worst Case)	High	2462	23.68		PASSED
802.11g:	Low	2412	19.95		PASSED
54Mbps	Middle	2437	20.54	30dBm	PASSED
(Worst Case)	High	2462	20.46		PASSED
802.11n(20):	Low	2412	19.45		PASSED
72Mbps ´	Middle	2437	20.05		PASSED
(Worst Case)	High	2462	20.02		PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service


Report No.: CGZ3170317-00356-EF Page 20 of 54





Test Plot

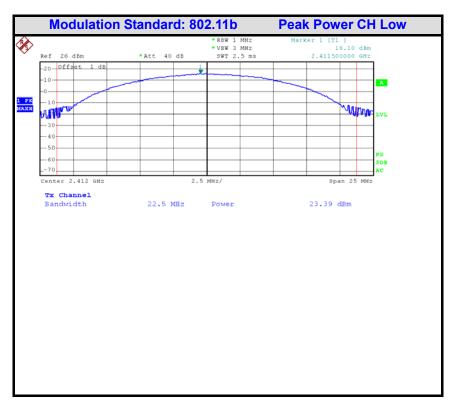

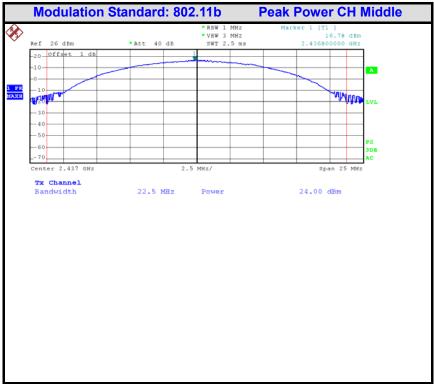

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





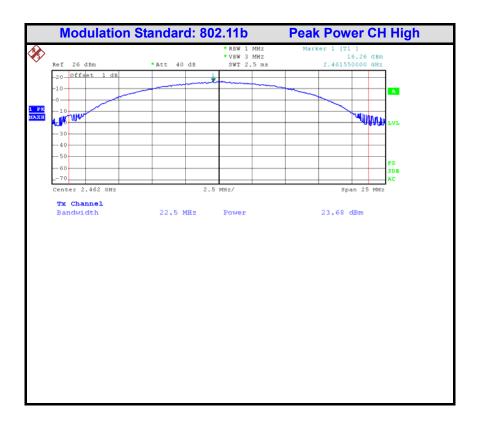

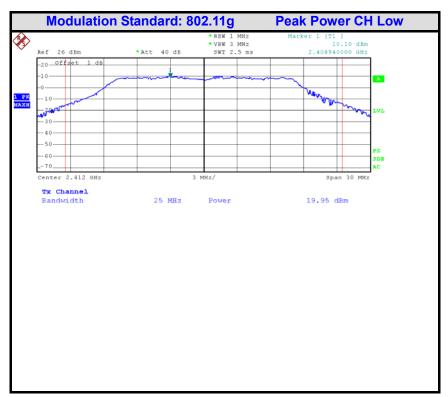

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471


Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn





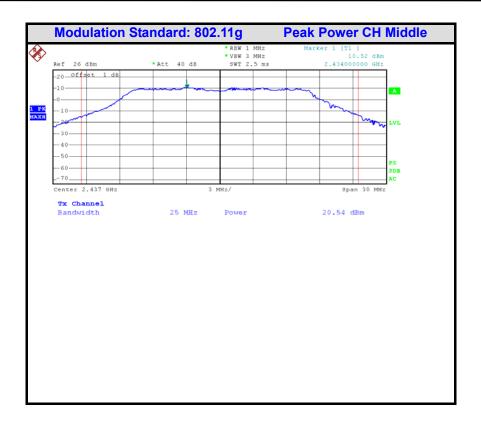

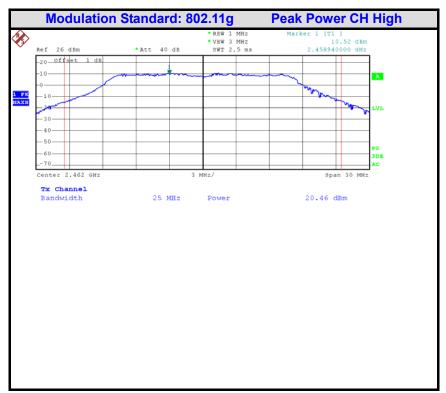

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





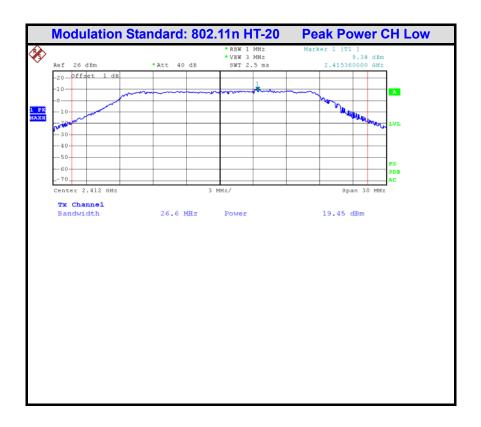

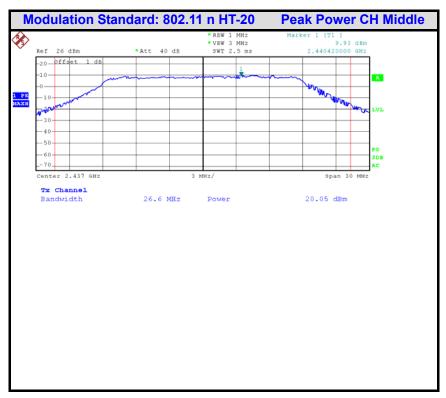

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn







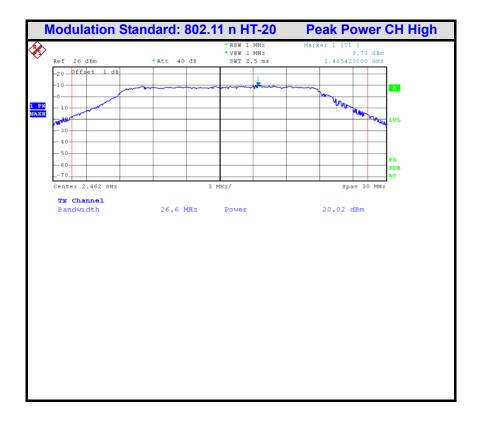

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





9.0 PEAK POWER SPECTRAL DENSITY


9.1 LIMIT

- 1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- 2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section

9.2 MEASUREMENT EQUIPMENT USED

Peak Power Spectral Density							
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03		

9.3 TEST CONFIGURATION



9.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5 times the bandwidth, Sweep=Auto couple
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are completed.

9.5 TEST RESULTS

PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 26 of 54

FCC ID:2AFPL-WNVR-20B-41







Test Data

Modulation Standard	Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
802.11b:	Low	2412	-5.27		PASSED
5.5Mbps	Middle	2437	-5.07	8	PASSED
(Worst Case)	High	2462	-7.02		PASSED
802.11g:	Low	2412	-10.99		PASSED
54Mbps	Middle	2437	-8.90		PASSED
(Worst Case)	High	2462	-8.60		PASSED
802.11n(20):	Low	2412	-16.37		PASSED
72Mbps	Middle	2437	-9.37		PASSED
(Worst Case)	High	2462	-9.29		PASSED

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service


Report No.: CGZ3170317-00356-EF Page 27 of 54





Test Plot

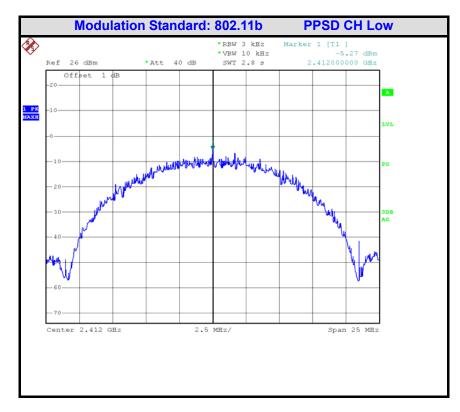

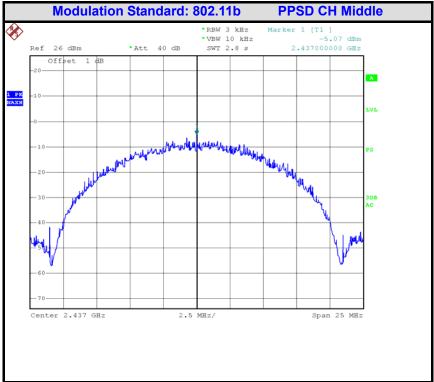

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





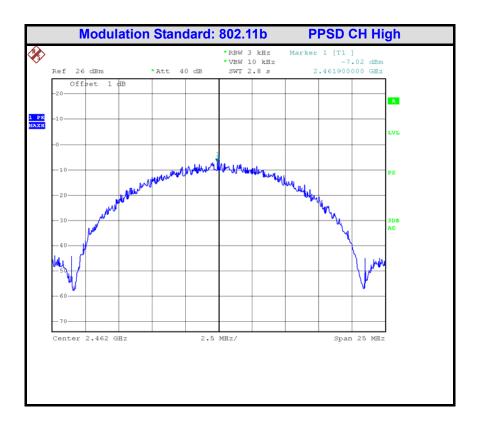

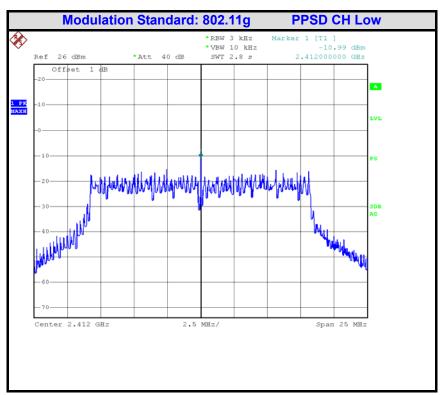

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





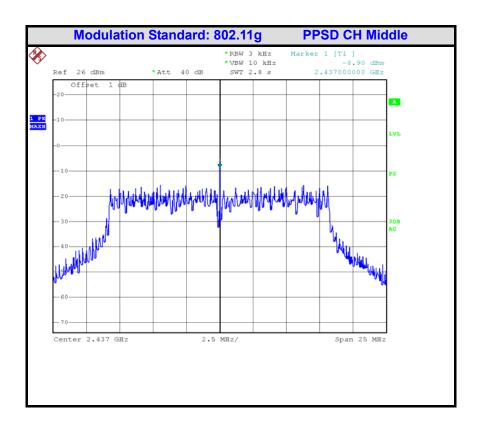

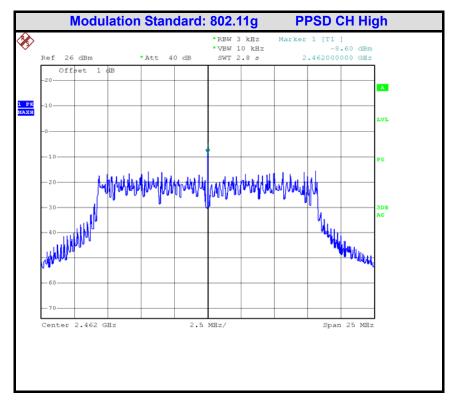

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471


Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn





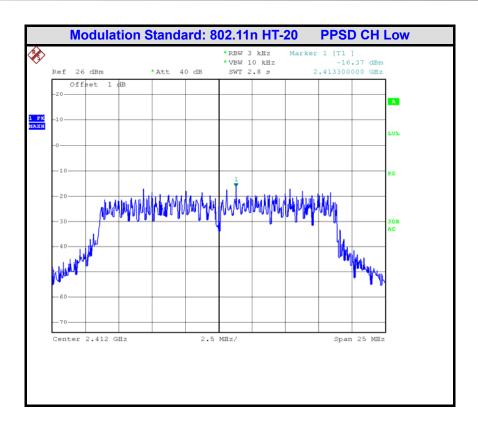

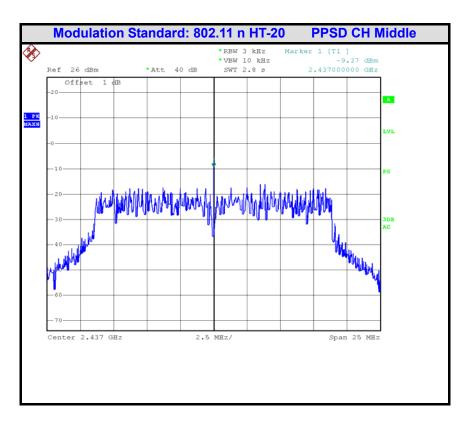

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





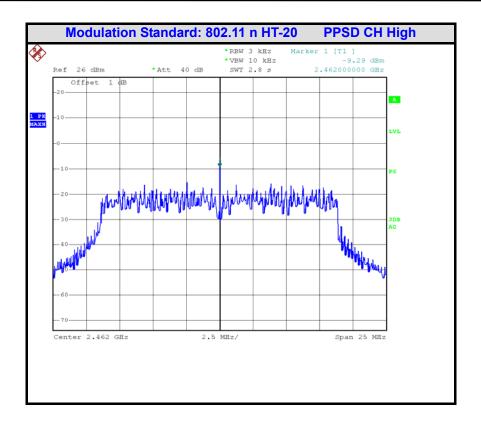

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





10.0 BAND EDGES MEASUREMENT


10.1 LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

10.2 MEASUREMENT EQUIPMENT USED

Radiated disturbance (electric field)							
Item	m Test Equipment Manufacturer Model No. Serial No. Last						
1	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03		

10.3 Test Configuration



10.4 TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep=Auto couple
- 4. Record the max. reading.
- 5. Repeat the above procedure until the measurements for all frequencies are

10.5 TEST RESULTS

Refer to attach spectrum analyzer data chart.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


Report No.: CGZ3170317-00356-EF Page 33 of 54






Test Polt:

Band-edge Conducted Measurment:

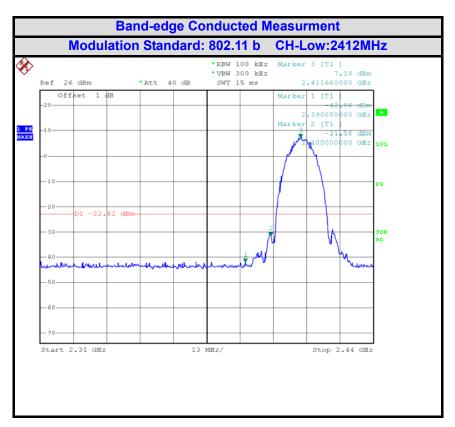

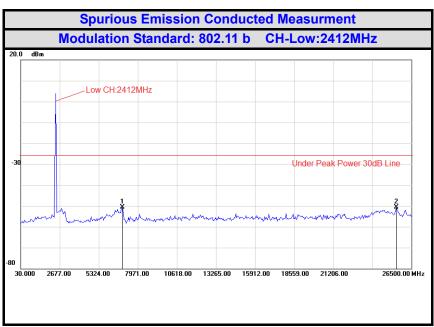

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





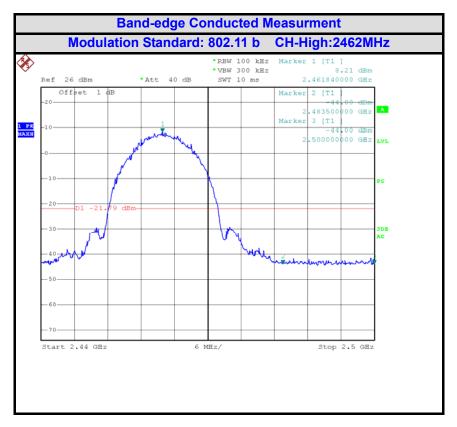

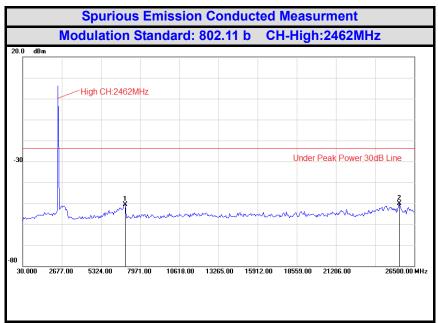

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





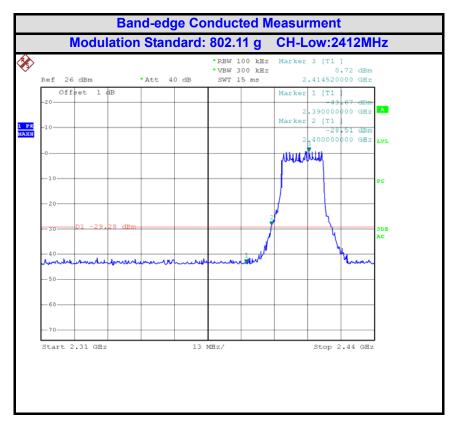

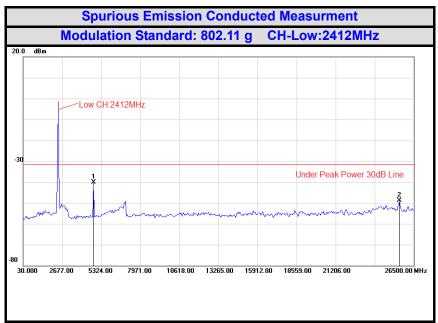

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





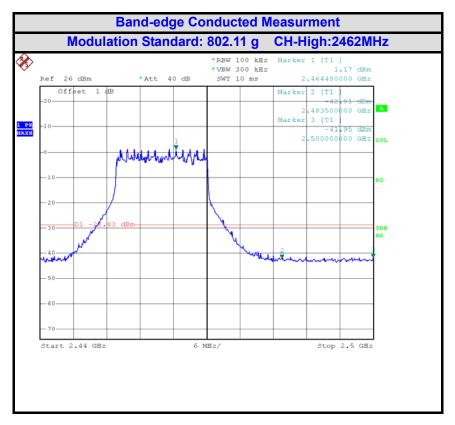

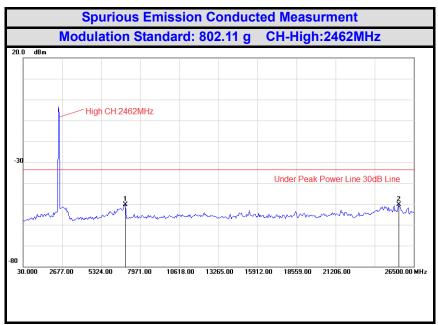

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471


Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn





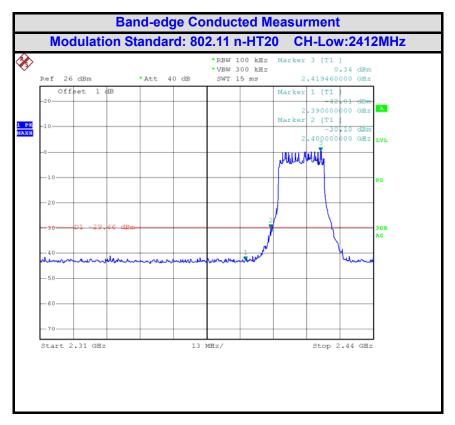

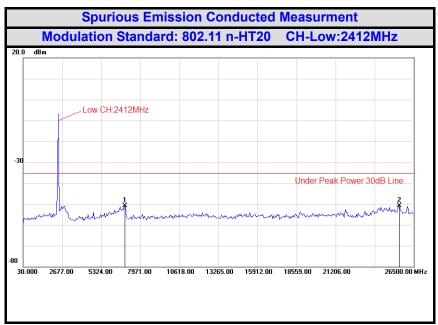

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





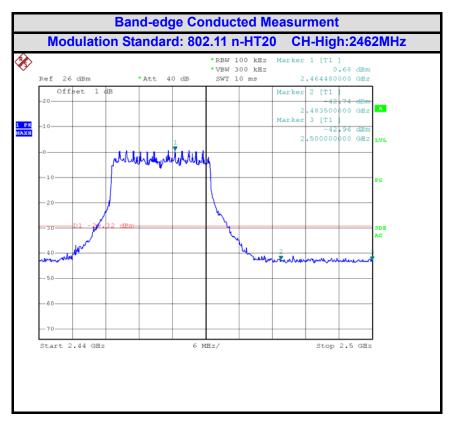

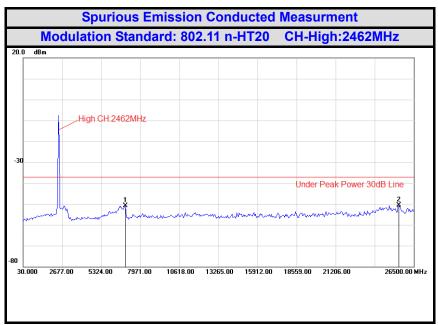

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





11.0 SPURIOUS EMISSIONS

11.1 LIMIT

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FRE	QUEN	CY	DISTANCE	FIELD STREN	GTHS LIMIT
	MHz		Meters	μV/m	dB(μV)/m
0.009	~	0.490	300	2400/F(kHz)	
0.490	~	1.705	30	24000/F(kHz)	
1.705	~	30	30	30	
30	~	88	3	100	40.0
88	~	216	3	150	43.5
216	~	960	3	200	46.0
960	~	1000	3	500	54.0
Al	Above 1000		3	Other:74.0 dB(μ 54.0 dB(μV)/n	

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

11.2 Test Equipment

Radia	Radiated disturbance (electric field)								
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.				
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2016/11				
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2017/03				
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2017/03				
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2017/03				
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2017/03				
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2016/11				
7	EMI Test Software	EZ-EMC	Farad	N/A	N/A				

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service


Report No.: CGZ3170317-00356-EF Page 40 of 54






11.3 TEST CONFIGURATION


Below 30MHz

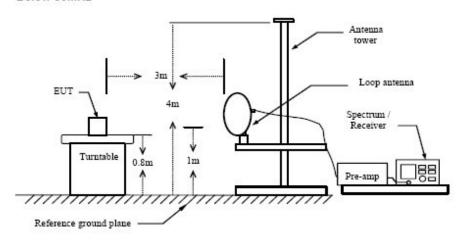

Below 1 GHz

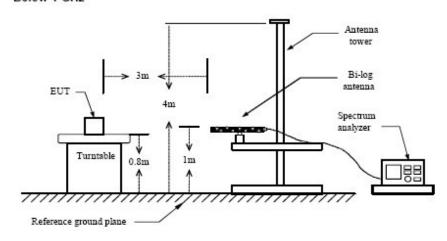

Above 1 GHz

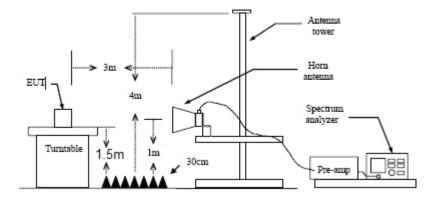

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF

CENTRE OF TESTING SERVICE





11.4 TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m for below 1GHz and 1.5m for Above 1GHz above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

11.5 TEST RESULTS

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

Page 42 of 54





CENTRE OF TESTING SERVICE

Test Mode: TX –X Position Mode Result: □ - passed □ - not passed

No.	Frequency (MHz)	Factor (dB)		Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
Rem	Remark: The test result reading value is to low, margin all > 20dB of the limit.							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 43 of 54








EUT	Network Video Recorder
Operating Condition	DC 12V by adapter
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	17~29 March 2017
Operator	Duke
MODEL NO	WNVR-20B-41-JUN

Channel:	TX –X Position	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	30MHz-1GHz		'

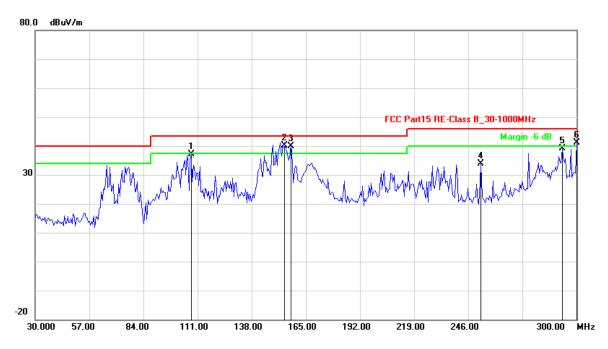

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	107.9158	-16.86	53.89	37.03	43.50	-6.47	QP		
2	154.4489	-15.32	55.48	40.16	43.50	-3.34	QP		
3	157.6954	-15.34	55.25	39.91	43.50	-3.59	QP		
4	252.3848	-10.85	44.74	33.89	46.00	-12.11	QP		
5	292.9659	-2.98	42.03	39.05	46.00	-6.95	QP		
6	300.0000	-1.13	42.32	41.19	46.00	-4.81	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn


See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 44 of 54







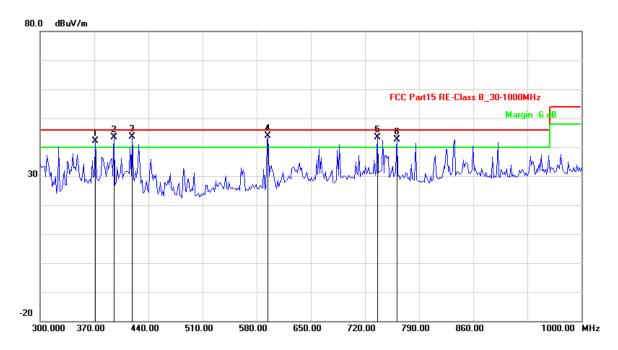

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	371.5431	-10.71	52.78	42.07	46.00	-3.93	QP		
2	395.3908	-10.35	53.71	43.36	46.00	-2.64	QP		
3	419.2385	-9.48	53.12	43.64	46.00	-2.36	QP		
4	594.5892	-5.45	49.35	43.90	46.00	-2.10	QP		
5	736.2725	-1.86	45.19	43.33	46.00	-2.67	QP		
6	761.5230	-1.71	44.31	42.60	46.00	-3.40	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn







Modulation Standard: 802.11 b
Channel: Low Channel
Test point: Horizontal
Frequency range: 1GHz-26.5GHz

Result: ■ - passed
□ - not passed

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3226.453	4.14	37.85	41.99	74.00	-32.01	peak	
2	3226.453	4.14	26.27	30.41	54.00	-23.59	AVG	
3	5871.743	8.50	40.77	49.27	74.00	-24.73	peak	
4	5871.743	8.50	29.02	37.52	54.00	-16.48	AVG	
Remark	Remark: Other frequency mini margin all >20 dB of Limit							

Modulation Standard:802.11 bResult:■ - passedChannel:Middle Channel□ - not passedTest point:HorizontalFrequency range:1GHz-26.5GHz

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1749.499	3.27	39.84	43.11	74.00	-30.89	peak	
2	1749.499	3.27	28.14	31.41	54.00	-22.59	AVG	
3	5695.391	7.98	39.13	47.11	74.00	-26.89	peak	
4	5695.391	7.98	27.70	35.68	54.00	-18.32	AVG	
Remark:	Remark: Other frequency mini margin all >20 dB of Limit							

Modulation Standard:802.11 bResult:■ - passedChannel:High Channel□ - not passedTest point:HorizontalFrequency range:1GHz-26.5GHz

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3380.762	3.83	35.96	39.79	74.00	-34.21	peak	
2	3380.762	3.83	22.91	26.74	54.00	-27.26	AVG	
3	5871.743	8.50	39.04	47.54	74.00	-26.46	peak	
4	5871.743	8.50	27.28	35.78	54.00	-18.22	AVG	
Remark:	Remark: Other frequency mini margin all >20 dB of Limit							

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 46 of 54







Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	Low Channel		☐ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3314.629	3.96	36.51	40.47	74.00	-33.53	peak	
2	3314.629	3.96	24.80	28.76	54.00	-25.24	AVG	
3	5959.920	8.76	40.23	48.99	74.00	-25.01	peak	
4	5959.920	8.76	28.13	36.89	54.00	-17.11	AVG	
Remark	Remark: Other frequency mini margin all >20dB of Limit							

Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	Middle Channel		□ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	3446.894	3.69	37.08	40.77	74.00	-33.23	peak		
2	3446.894	3.69	25.27	28.96	54.00	-25.04	AVG		
3	6136.273	9.23	38.78	48.01	74.00	-25.99	peak		
4	6136.273	9.23	27.19	36.42	54.00	-17.58	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11 g	Result:	■ - passed
Channel:	High Channel		□ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1749.499	3.27	40.79	44.06	74.00	-29.94	peak		
2	1749.499	3.27	29.35	32.62	54.00	-21.38	AVG		
3	5739.479	8.11	39.80	47.91	74.00	-26.09	peak		
4	5739.479	8.11	27.30	35.41	54.00	-18.59	AVG		
Remark	Remark: Other frequency mini margin all >20 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 47 of 54







Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Low Channel		☐ - not passed
Test point:	Horizontal		
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	3248.497	4.10	37.48	41.58	74.00	-32.42	peak		
2	3248.497	4.10	26.31	30.41	54.00	-23.59	AVG		
3	5761.523	8.18	40.15	48.33	74.00	-25.67	peak		
4	5761.523	8.18	28.10	36.28	54.00	-17.72	AVG		
Remark	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Middle Channel		☐ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1815.631	3.65	40.23	43.88	74.00	-30.12	peak		
2	1815.631	3.65	27.82	31.47	54.00	-22.53	AVG		
3	4593.186	4.56	36.99	41.55	74.00	-32.45	peak		
4	4593.186	4.56	24.13	28.69	54.00	-25.31	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	High Channel		□ - not passed
Test point:	Horizontal		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1727.455	3.14	39.34	42.48	74.00	-31.52	peak		
2	1727.455	3.14	27.22	30.36	54.00	-23.64	AVG		
3	4438.878	4.04	37.23	41.27	74.00	-32.73	peak		
4	4438.878	4.04	25.37	29.41	54.00	-24.59	AVG		
Remark:	Remark: Other frequency mini margin all >20 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 48 of 54








Channel: TX –X Position Result: ■ - passed

Test point: Vertical □ - not passed

Frequency range: 30MHz-1GHz

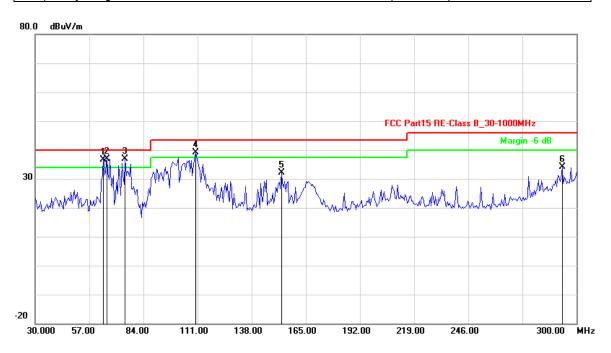

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	64.0882	-19.32	56.05	36.73	40.00	-3.27	QP		
2	65.7114	-19.50	56.26	36.76	40.00	-3.24	QP		
3	74.9098	-19.58	56.49	36.91	40.00	-3.09	QP		
4	110.0802	-16.69	55.86	39.17	43.50	-4.33	QP		
5	152.8257	-15.31	47.51	32.20	43.50	-11.30	QP		
6	292.9659	-2.98	37.16	34.18	46.00	-11.82	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn

Report No.: CGZ3170317-00356-EF

CENTRE OF TESTING SERVICE





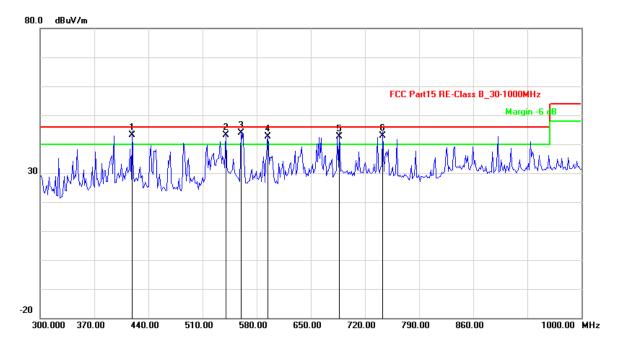

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	419.2385	-9.48	52.55	43.07	46.00	-2.93	QP
2	539.8798	-5.94	49.14	43.20	46.00	-2.80	QP
3	559.5190	-5.49	49.28	43.79	46.00	-2.21	QP
4	594.5892	-5.45	48.18	42.73	46.00	-3.27	QP
5	687.1743	-3.22	45.82	42.60	46.00	-3.40	QP
6	743.2866	-1.59	44.44	42.85	46.00	-3.15	QP
Remark	Other frequen	icy mini ma	rgin all >6 dB	of Limit			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF







Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	Low Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3138.277	4.32	38.07	42.39	74.00	-31.61	peak
2	3138.277	4.32	26.09	30.41	54.00	-23.59	AVG
3	6026.052	8.95	40.53	49.48	74.00	-24.52	peak
4	6026.052	8.95	28.70	37.65	54.00	-16.35	AVG
Remark:	Remark: Other frequency mini margin all >20 dB of Limit						

Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	Middle Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3535.070	3.51	37.56	41.07	74.00	-32.93	peak
2	3535.070	3.51	26.50	30.01	54.00	-23.99	AVG
3	5849.699	8.44	40.66	49.10	74.00	-24.90	peak
4	5849.699	8.44	29.12	37.56	54.00	-16.44	AVG
Remark:	Remark: Other frequency mini margin all >20 dB of Limit						

Modulation Standard:	802.11 b	Result:	■ - passed
Channel:	High Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3314.629	3.96	36.61	40.57	74.00	-33.43	peak
2	3314.629	3.96	24.83	28.79	54.00	-25.21	AVG
3	5408.818	7.14	38.10	45.24	74.00	-28.76	peak
4	5408.818	7.14	26.48	33.62	54.00	-20.38	AVG
Remark:	Remark: Other frequency mini margin all >20 dB of Limit						

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 51 of 54







Modulation Standard: 802.11 g
Channel: Low Channel
Test point: Vertical
Frequency range: 1GHz-26.5GHz

Result: ■ - passed
□ - not passed

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1771.543	3.39	40.70	44.09	74.00	-29.91	peak
2	1771.543	3.39	28.35	31.74	54.00	-22.26	AVG
3	5056.112	6.10	38.69	44.79	74.00	-29.21	peak
4	5056.112	6.10	25.98	32.08	54.00	-21.92	AVG
Remark:	Remark: Other frequency mini margin all >20 dB of Limit						

Modulation Standard:802.11 gResult:■ - passedChannel:Middle Channel□ - not passedTest point:VerticalFrequency range:1GHz-26.5GHz

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1749.499	3.27	39.54	42.81	74.00	-31.19	peak
2	1749.499	3.27	27.35	30.62	54.00	-23.38	AVG
3	4835.671	5.38	38.25	43.63	74.00	-30.37	peak
4	4835.671	5.38	26.03	31.41	54.00	-22.59	AVG
Remark:	Remark: Other frequency mini margin all >20 dB of Limit						

Modulation Standard:802.11 gResult:■ - passedChannel:High Channel□ - not passedTest point:VerticalFrequency range:1GHz-26.5GHz

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3557.114	3.47	36.47	39.94	74.00	-34.06	peak
2	3557.114	3.47	24.37	27.84	54.00	-26.16	AVG
3	5871.743	8.50	40.04	48.54	74.00	-25.46	peak
4	5871.743	8.50	27.97	36.47	54.00	-17.53	AVG
Remark:	Remark: Other frequency mini margin all >20dB of Limit						

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 52 of 54







Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Low Channel		□ - not passed
Test point:	Vertical		
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1793.587	3.52	42.09	45.61	74.00	-28.39	peak
2	1793.587	3.52	29.89	33.41	54.00	-20.59	AVG
3	4571.142	4.49	37.85	42.34	74.00	-31.66	peak
4	4571.142	4.49	26.13	30.62	54.00	-23.38	AVG
Remark	Remark: Other frequency mini margin all >20 dB of Limit						

Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	Middle Channel		□ - not passed
Test point:	Vertical		
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	3446.894	3.69	35.98	39.67	74.00	-34.33	peak	
2	3446.894	3.69	23.72	27.41	54.00	-26.59	AVG	
3	5607.214	7.72	38.73	46.45	74.00	-27.55	peak	
4	5607.214	7.72	25.93	33.65	54.00	-20.35	AVG	
Remark: Other frequency mini margin all >20 dB of Limit								

Modulation Standard:	802.11n-HT20	Result:	■ - passed
Channel:	High Channel		□ - not passed
Test point:	Vertical		'
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1991.984	4.67	39.80	44.47	74.00	-29.53	peak	
2	1991.984	4.67	27.61	32.28	54.00	-21.72	AVG	
3	4989.980	5.90	37.66	43.56	74.00	-30.44	peak	
4	4989.980	5.90	25.72	31.62	54.00	-22.38	AVG	
Remark: Other frequency mini margin all >20 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 53 of 54

CENTRE OF TESTING SERVICE





12.0 Antenna Requirements

12.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Antenna Construction and Directional Gain

Antenna type:External antenna

Antenna Gain: 5dBi

13.0 Deviation to test specifications

The following identical model(s):

WNVR201-44PD, WCM-PWNVR20W-BU-JUN, WNVR201-88P, WNVR201-44PA, WNVR201-44PH, WNVR201-44P CAN-WNVR201-44P, C-W841-PIPR2MP,

Belong to the tested device:

Product description: **Network Video Recorder**Model name: **WNVR-20B-41-JUN**

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)

Complaint line: +86-20-85533471

Fax: +86-20-38780406

E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3170317-00356-EF Page 54 of 54