



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203


Rev.: 01

Page: 95 of 180

Radiated Spurious Emissions

Radiated emission below 1GHz

Worst case Mode: 11b_Channel 11

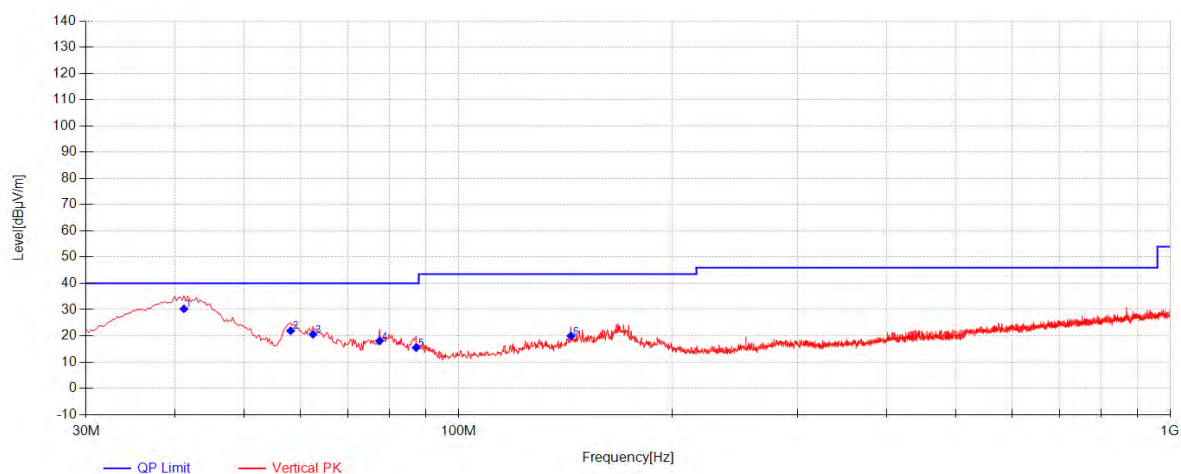

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	41.155	52.56	-36.25	13.97	30.28	40.00	9.72	Vertical
2	58.13	45.36	-36.35	12.90	21.91	40.00	18.09	Vertical
3	62.495	44.71	-36.43	12.27	20.55	40.00	19.45	Vertical
4	77.53	44.26	-35.85	9.67	18.08	40.00	21.92	Vertical
5	87.23	42.29	-36.21	9.40	15.48	40.00	24.52	Vertical
6	143.975	41.75	-35.42	13.64	19.96	43.50	23.54	Vertical




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203

Rev.: 01

Page: 96 of 180

11b_Channel 11 WORSE

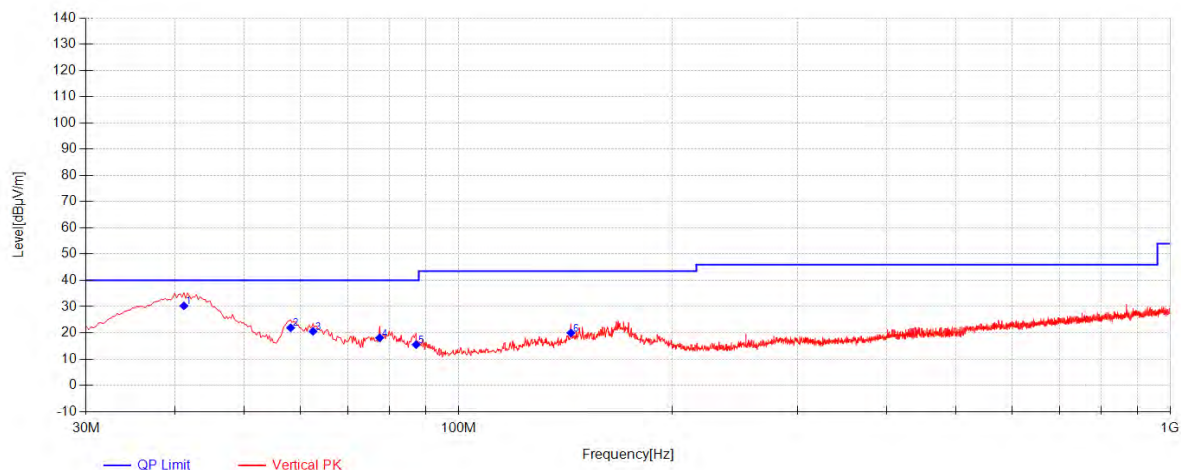

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	41.155	52.56	-36.25	13.97	30.28	40.00	9.72	Vertical
2	58.13	45.36	-36.35	12.90	21.91	40.00	18.09	Vertical
3	62.495	44.71	-36.43	12.27	20.55	40.00	19.45	Vertical
4	77.53	44.26	-35.85	9.67	18.08	40.00	21.92	Vertical
5	87.23	42.29	-36.21	9.40	15.48	40.00	24.52	Vertical
6	143.975	41.75	-35.42	13.64	19.96	43.50	23.54	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
Value = Reading(dBμV) + AF(dB/m) + Factor(dB):
AF = Antenna Factor(dB/m)
Factor = Cable Factor(dB) - Preamplifier gain(dB)
Margin = Limit(dBμV/m) – Value(dBμV/m)
- All channels have been tested, but only the worst case data displayed in this report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250200007203

Rev.: 01

Page: 97 of 180

Transmitter emission Above 1GHz

802.11b_Channel 01

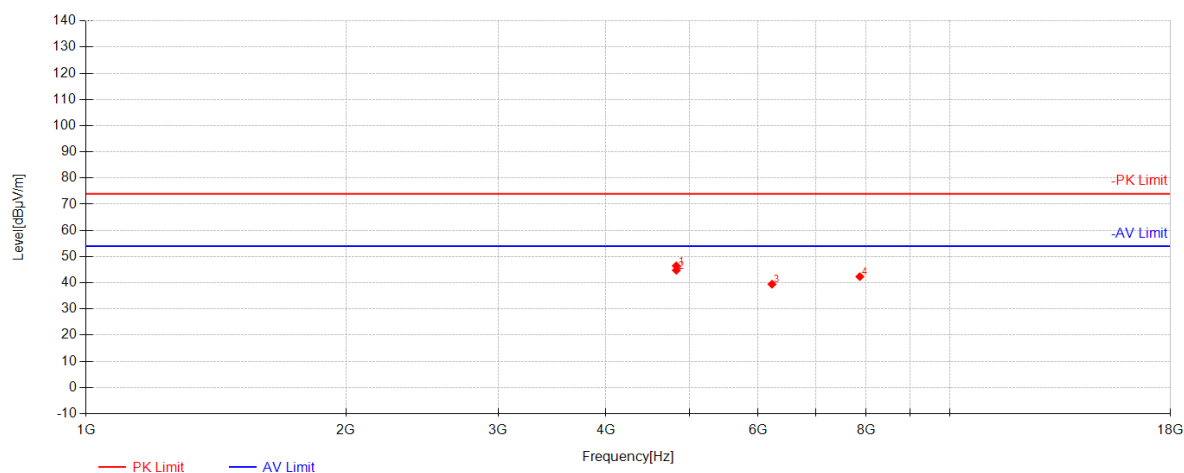


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4824	60.89	31.12	-45.54	46.47	74.00	27.53	Horizontal
2	4824.375	59.21	31.12	-45.54	44.79	54.00	9.21	Horizontal
3	6227.25	50.99	33.17	-44.70	39.46	74.00	34.54	Horizontal
4	7870.875	48.10	36.92	-42.67	42.35	74.00	31.65	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 98 of 180

802.11b_Channel 01

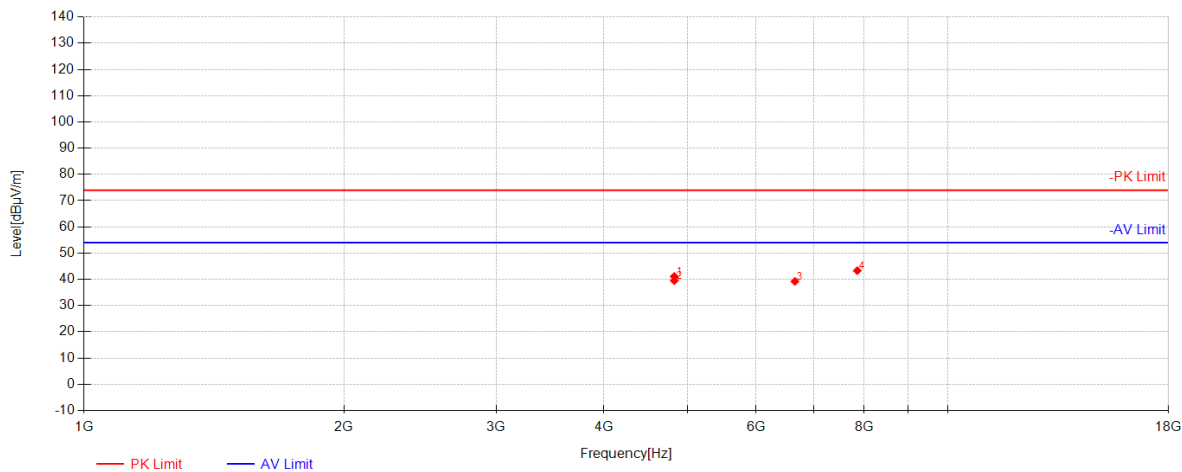


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4824	55.52	31.12	-45.54	41.10	74.00	32.90	Vertical
2	4824.375	53.93	31.12	-45.54	39.51	54.00	14.49	Vertical
3	6654.75	48.90	34.38	-44.05	39.22	74.00	34.78	Vertical
4	7860	49.03	36.90	-42.62	43.32	74.00	30.68	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 99 of 180

802.11b_Channel 06

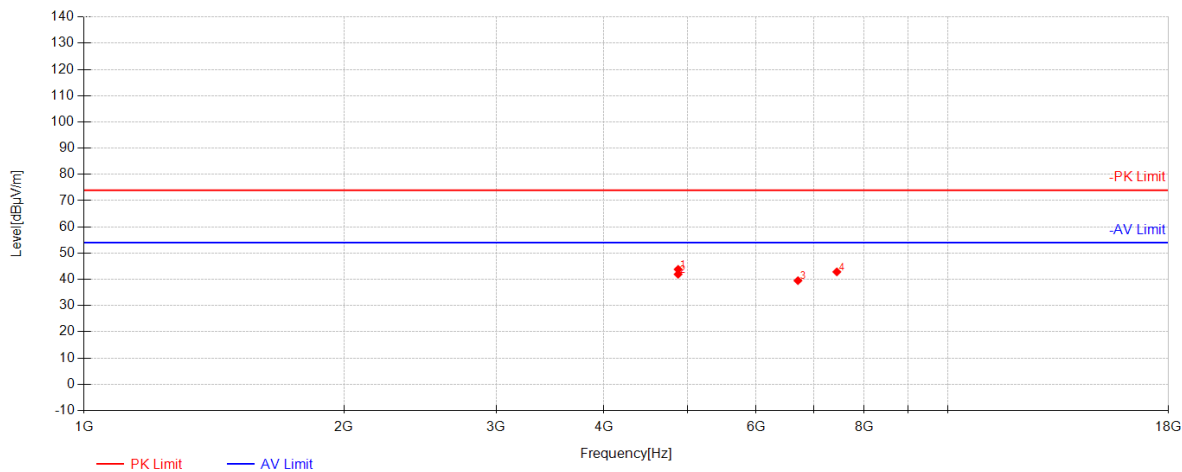


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4873.875	58.15	31.20	-45.53	43.82	74.00	30.18	Horizontal
2	4874.25	56.27	31.20	-45.53	41.94	54.00	12.06	Horizontal
3	6709.5	48.88	34.48	-43.84	39.51	74.00	34.49	Horizontal
4	7442.625	49.90	36.24	-43.29	42.84	74.00	31.16	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 100 of 180

802.11b_Channel 06

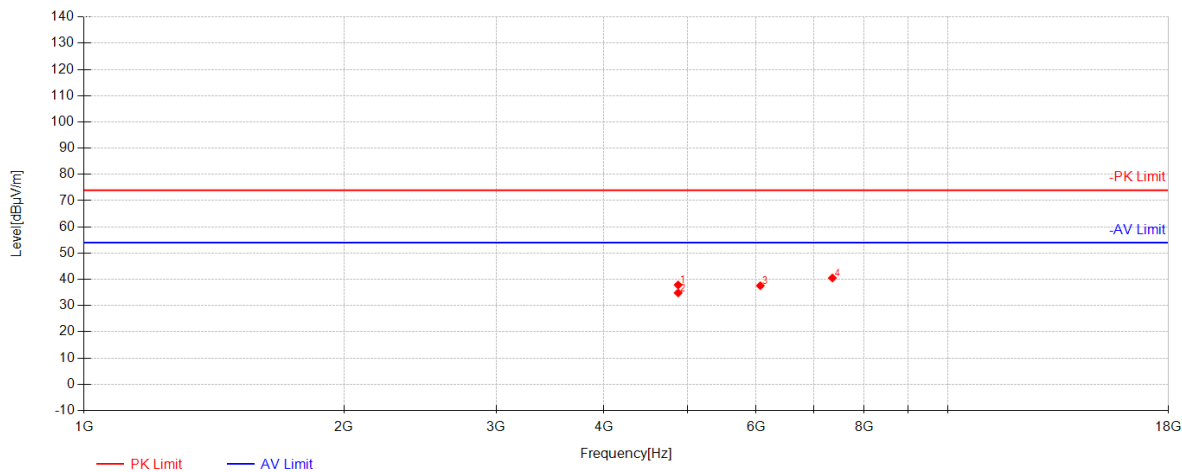


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4873.875	52.20	31.20	-45.53	37.87	74.00	36.13	Vertical
2	4874.25	49.14	31.20	-45.53	34.81	54.00	19.19	Vertical
3	6068.625	49.51	32.63	-44.57	37.57	74.00	36.43	Vertical
4	7354.875	48.08	35.99	-43.56	40.51	74.00	33.49	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 101 of 180

802.11b_Channel 11

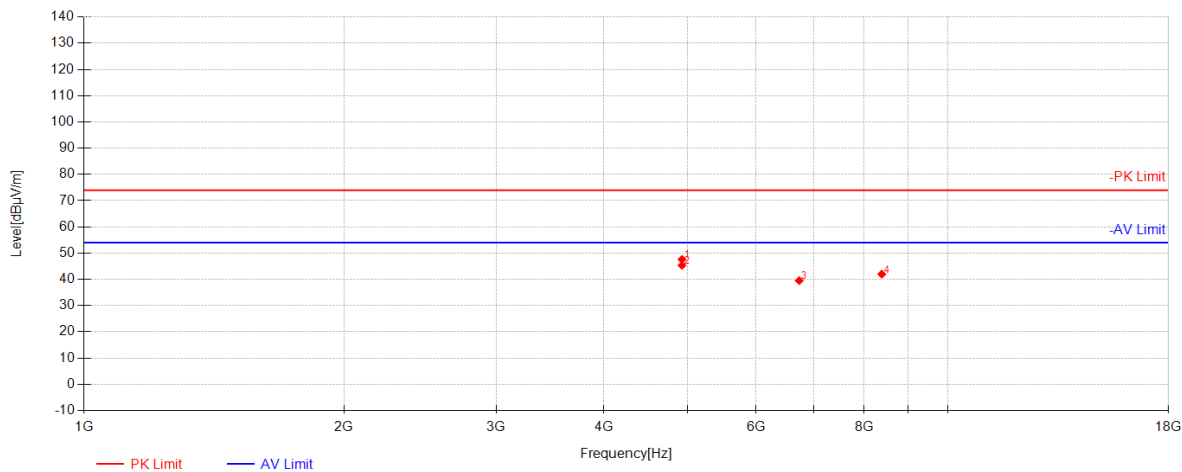


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4924.125	61.89	31.28	-45.56	47.61	74.00	26.39	Horizontal
2	4924.5	59.61	31.28	-45.56	45.33	54.00	8.67	Horizontal
3	6732	48.92	34.52	-43.93	39.51	74.00	34.49	Horizontal
4	8389.125	46.62	36.87	-41.51	41.98	74.00	32.02	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 102 of 180

802.11b_Channel 11

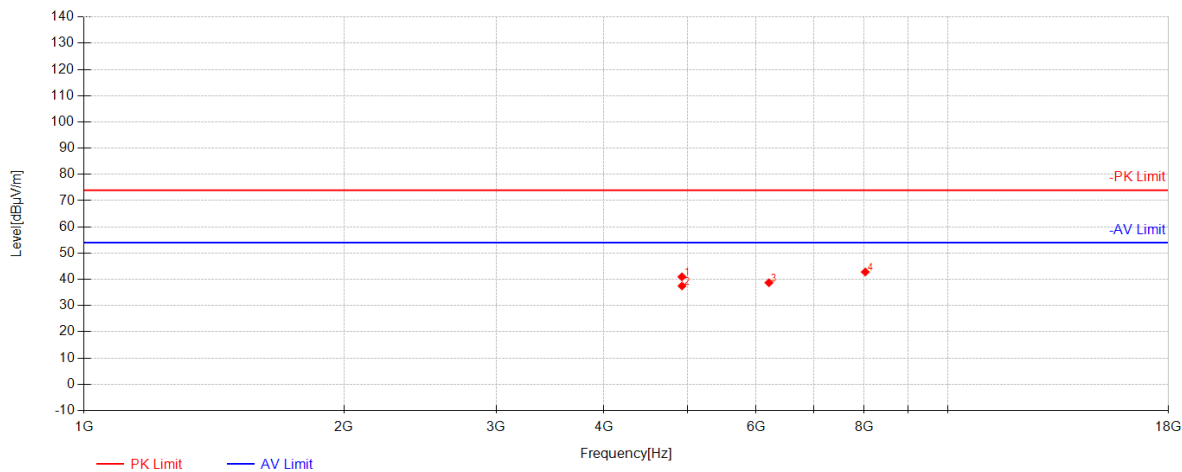


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4924.125	55.24	31.28	-45.56	40.96	74.00	33.04	Vertical
2	4924.5	51.76	31.28	-45.56	37.48	54.00	16.52	Vertical
3	6209.625	50.33	33.11	-44.74	38.70	74.00	35.30	Vertical
4	8028.75	47.79	37.08	-42.07	42.81	74.00	31.19	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 103 of 180

802.11b_Channel 01

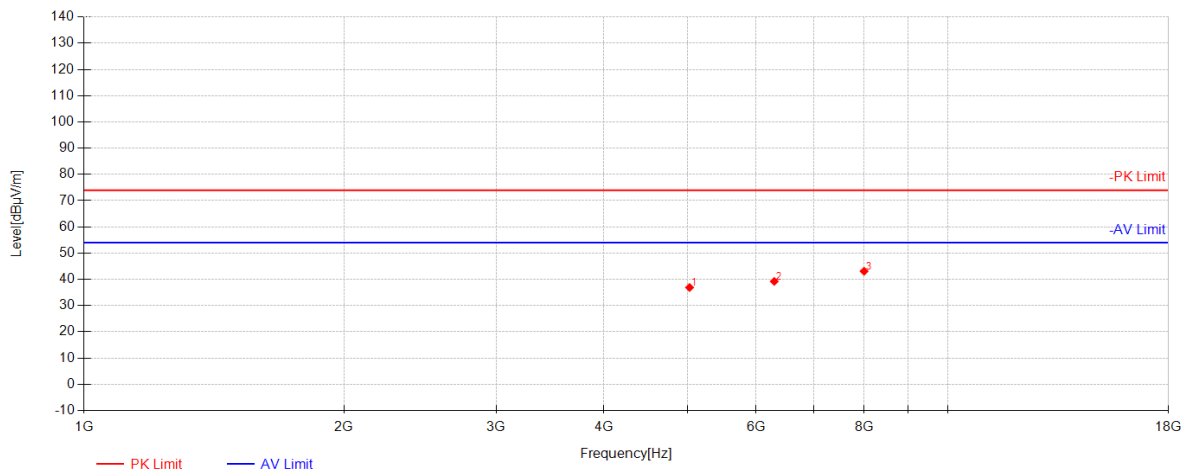


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5024.625	51.02	31.44	-45.57	36.89	74.00	37.11	Horizontal
2	6298.5	50.34	33.41	-44.54	39.21	74.00	34.79	Horizontal
3	8003.25	48.31	37.10	-42.32	43.09	74.00	30.91	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 104 of 180

802.11b_Channel 01

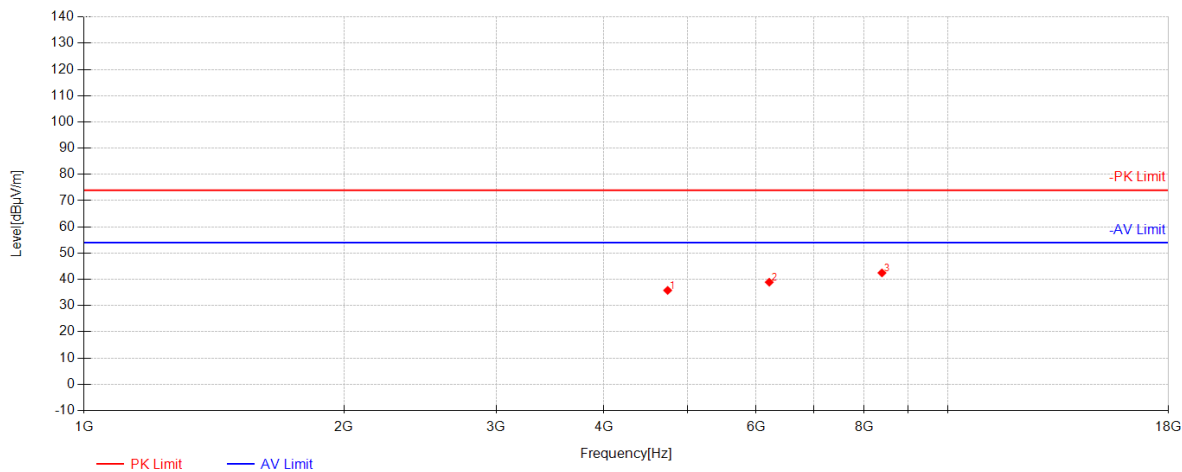


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4739.625	50.38	30.98	-45.58	35.79	74.00	38.21	Vertical
2	6214.875	50.50	33.13	-44.73	38.90	74.00	35.10	Vertical
3	8394	47.07	36.86	-41.48	42.45	74.00	31.55	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 105 of 180

802.11b_Channel 06

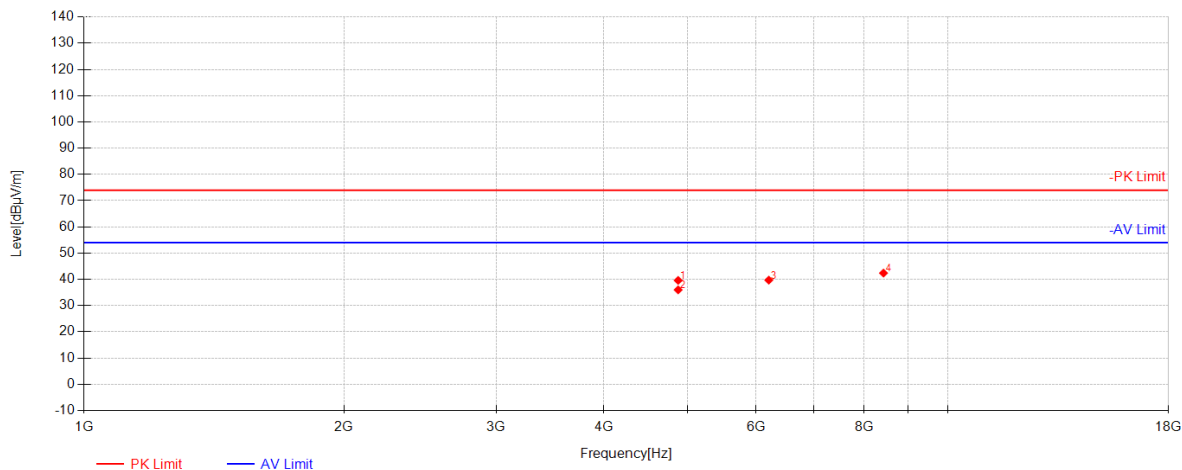


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4874.25	53.93	31.20	-45.53	39.60	74.00	34.40	Horizontal
2	4874.25	50.32	31.20	-45.53	35.99	54.00	18.01	Horizontal
3	6207.375	51.33	33.11	-44.74	39.69	74.00	34.31	Horizontal
4	8428.5	47.05	36.84	-41.50	42.39	74.00	31.61	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 106 of 180

802.11b_Channel 06

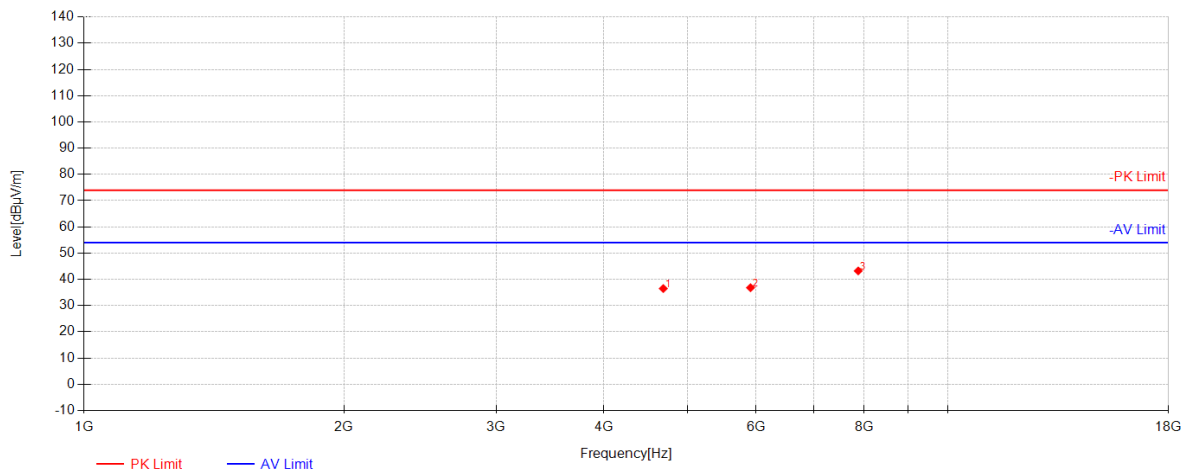


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4684.875	51.21	30.90	-45.61	36.50	74.00	37.50	Vertical
2	5911.5	49.38	32.38	-44.95	36.81	74.00	37.19	Vertical
3	7879.125	49.00	36.93	-42.71	43.22	74.00	30.78	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 107 of 180

802.11b_Channel 11

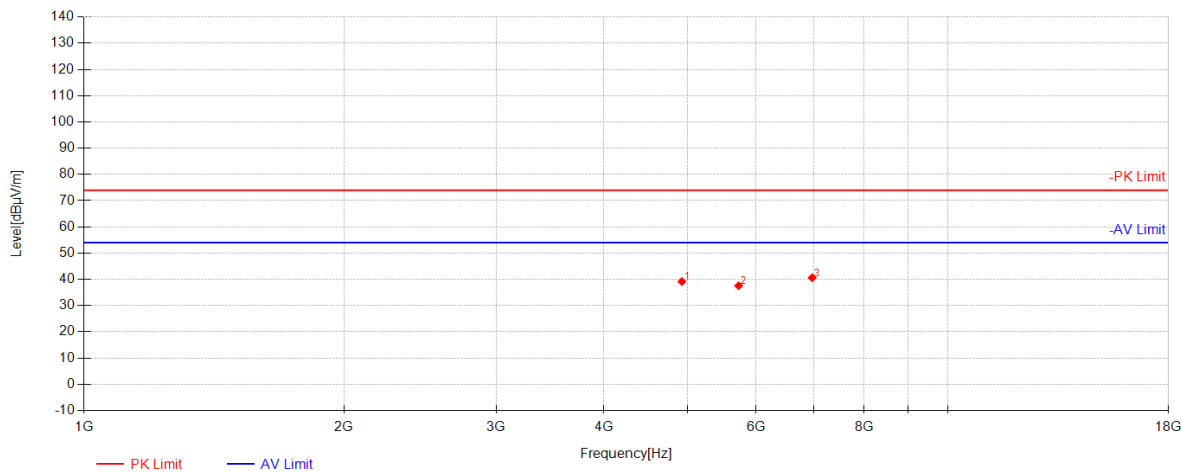


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4923.75	53.43	31.28	-45.56	39.15	74.00	34.85	Horizontal
2	5727.375	50.05	32.35	-44.82	37.57	74.00	36.43	Horizontal
3	6968.625	49.38	34.94	-43.72	40.60	74.00	33.40	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 108 of 180

802.11b_Channel 11

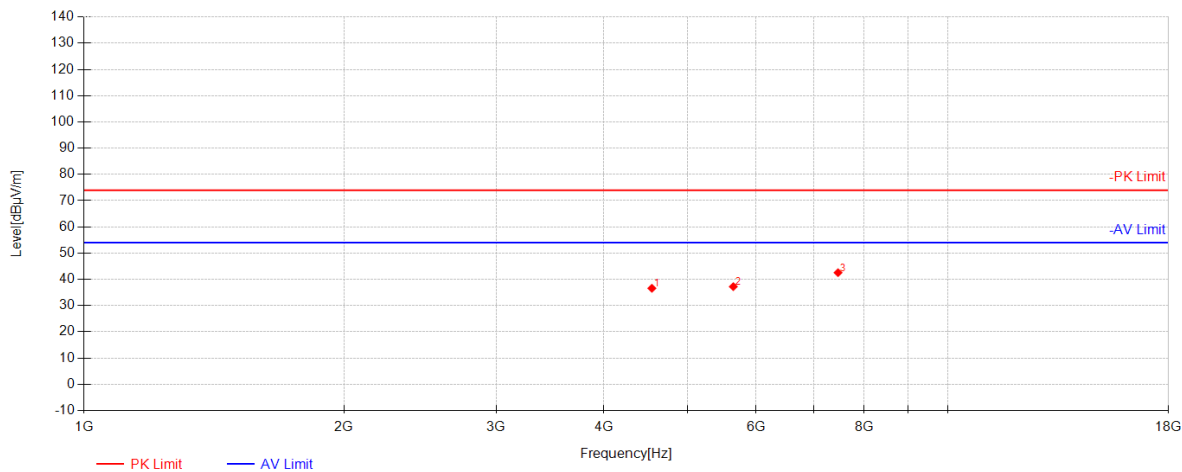


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4544.25	51.61	30.67	-45.69	36.59	74.00	37.41	Vertical
2	5647.125	49.87	32.33	-44.97	37.23	74.00	36.77	Vertical
3	7466.25	49.47	36.31	-43.23	42.54	74.00	31.46	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 109 of 180

802.11g_Channel 01

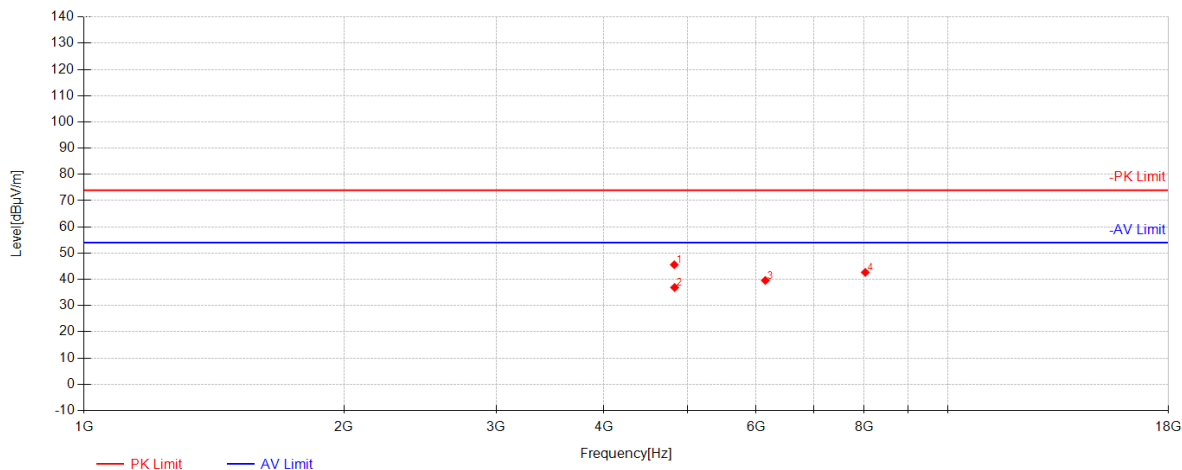


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4824.75	60.00	31.12	-45.54	45.58	74.00	28.42	Horizontal
2	4828.875	51.30	31.13	-45.54	36.89	54.00	17.11	Horizontal
3	6150	51.28	32.91	-44.61	39.58	74.00	34.42	Horizontal
4	8029.125	47.64	37.08	-42.06	42.66	74.00	31.34	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 110 of 180

802.11g_Channel 01

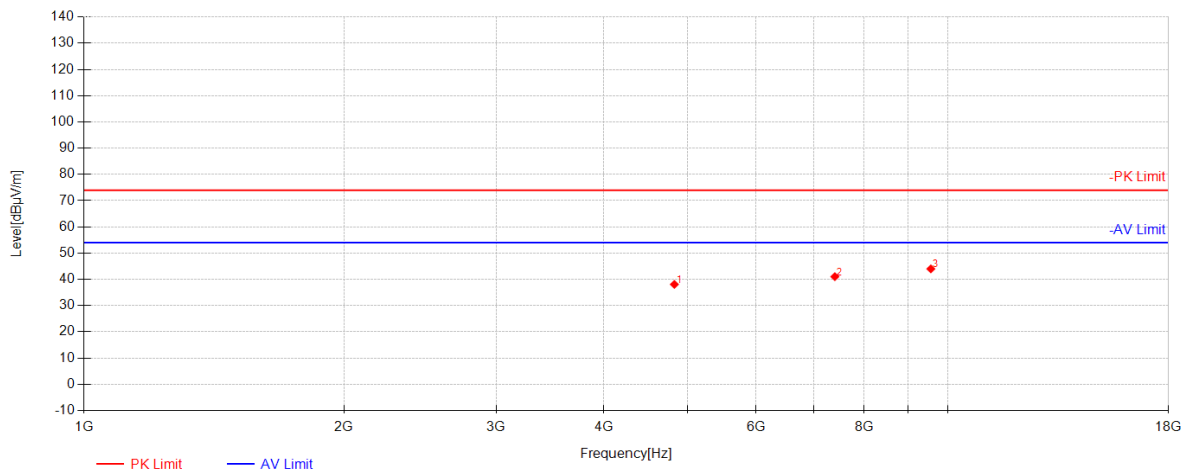


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4825.5	52.50	31.12	-45.54	38.08	74.00	35.92	Vertical
2	7402.5	48.30	36.13	-43.40	41.02	74.00	32.98	Vertical
3	9562.125	46.25	37.62	-39.88	43.99	74.00	30.01	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 111 of 180

802.11g_Channel 06

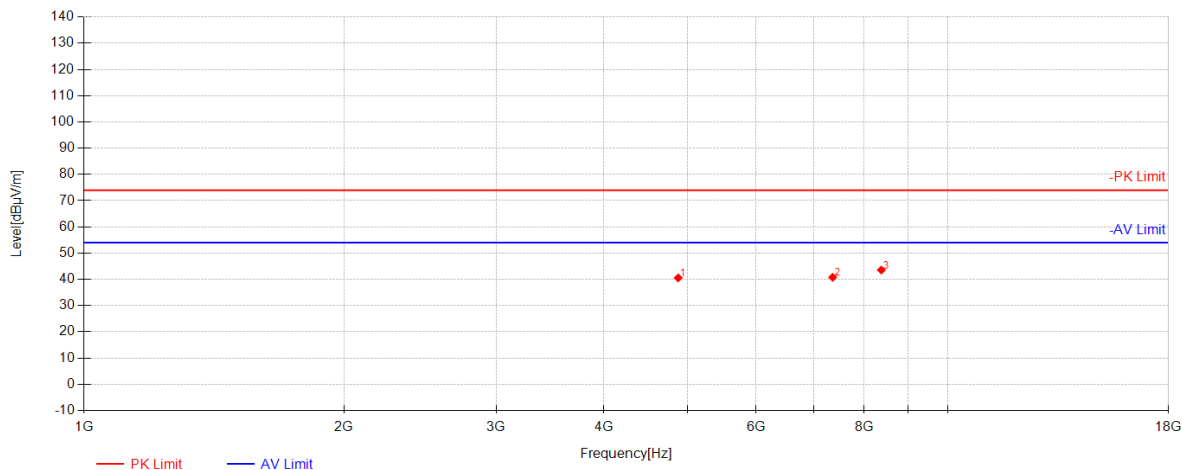


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4874.625	54.88	31.20	-45.53	40.55	74.00	33.45	Horizontal
2	7360.875	48.31	36.01	-43.54	40.78	74.00	33.22	Horizontal
3	8379.375	48.22	36.87	-41.57	43.53	74.00	30.47	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 112 of 180

802.11g_Channel 06

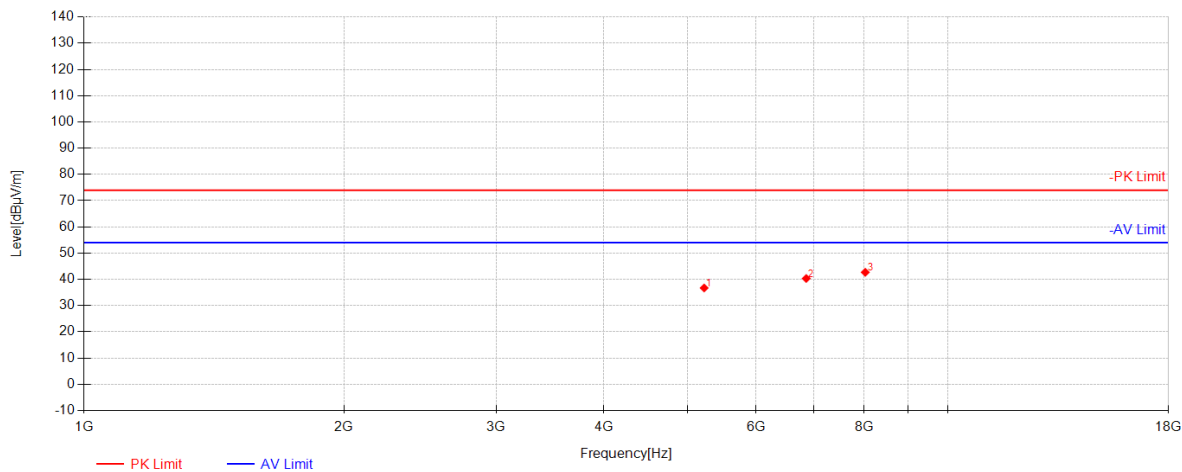


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5224.5	50.14	31.80	-45.23	36.71	74.00	37.29	Vertical
2	6859.125	49.71	34.75	-44.13	40.33	74.00	33.67	Vertical
3	8028.75	47.67	37.08	-42.07	42.69	74.00	31.31	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 113 of 180

802.11g_Channel 11

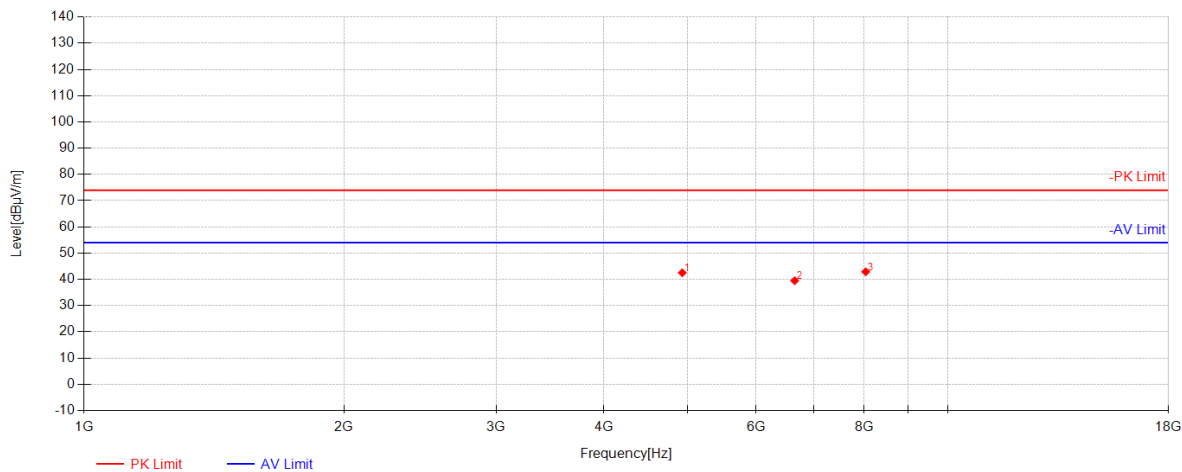


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4928.25	56.79	31.29	-45.56	42.51	74.00	31.49	Horizontal
2	6650.625	49.18	34.37	-44.08	39.47	74.00	34.53	Horizontal
3	8037.75	47.77	37.08	-41.98	42.87	74.00	31.13	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 114 of 180

802.11g_Channel 11

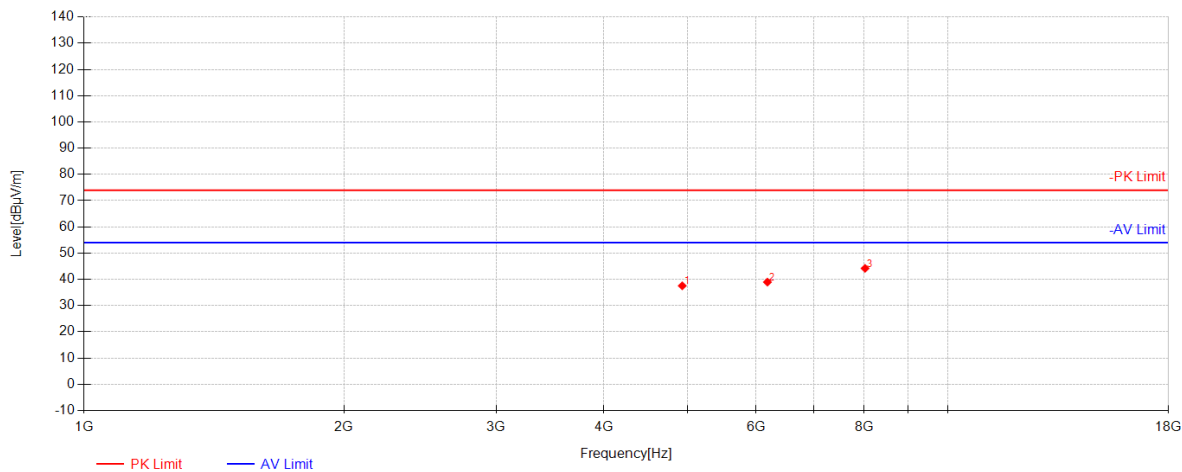


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4928.25	51.81	31.29	-45.56	37.53	74.00	36.47	Vertical
2	6184.5	50.62	33.03	-44.71	38.94	74.00	35.06	Vertical
3	8024.25	49.21	37.09	-42.11	44.19	74.00	29.81	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 115 of 180

802.11g_Channel 01

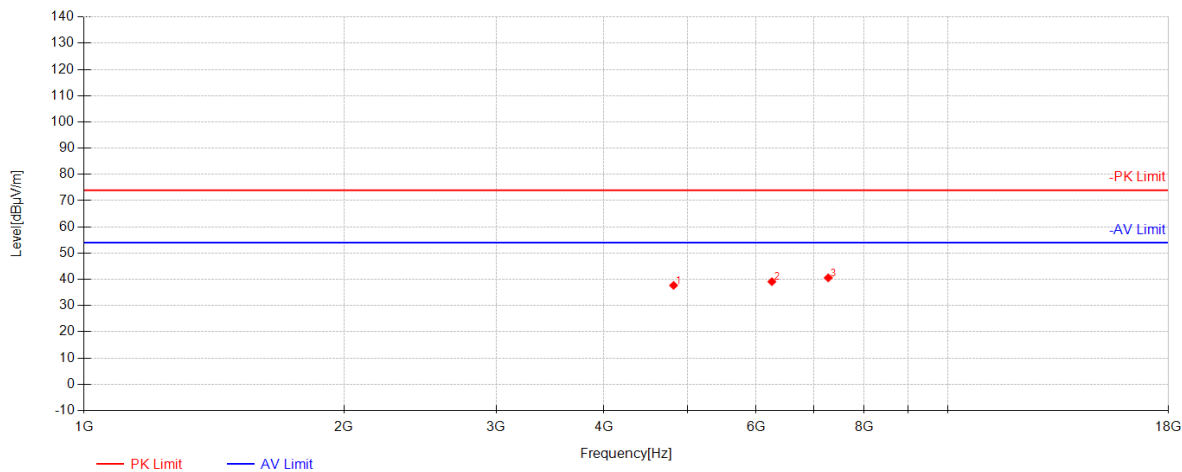


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4815.375	52.11	31.10	-45.54	37.68	74.00	36.32	Horizontal
2	6259.125	50.46	33.28	-44.63	39.11	74.00	34.89	Horizontal
3	7273.875	48.48	35.77	-43.66	40.58	74.00	33.42	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 116 of 180

802.11g_Channel 01

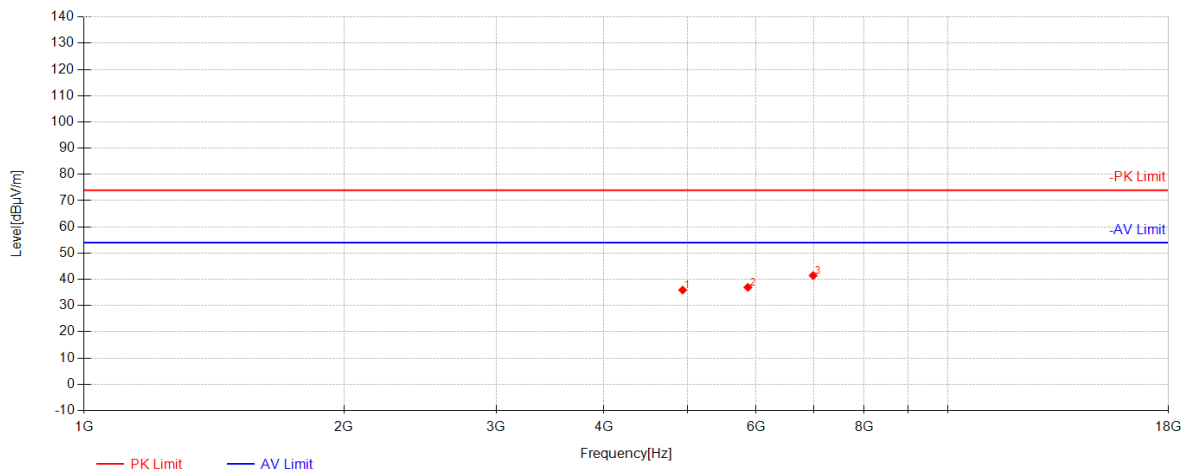


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4933.125	50.17	31.29	-45.57	35.90	74.00	38.10	Vertical
2	5870.25	49.49	32.37	-44.90	36.96	74.00	37.04	Vertical
3	6987.75	50.08	34.98	-43.62	41.44	74.00	32.56	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 117 of 180

802.11g_Channel 06

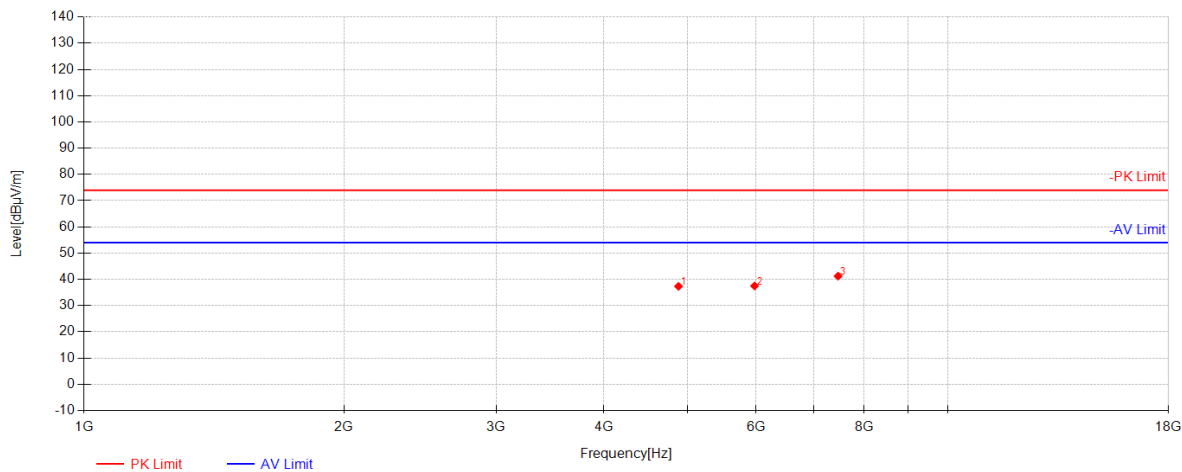


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4879.125	51.66	31.21	-45.53	37.33	74.00	36.67	Horizontal
2	5976	49.95	32.40	-44.86	37.48	74.00	36.52	Horizontal
3	7467.375	48.14	36.31	-43.23	41.22	74.00	32.78	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 118 of 180

802.11g_Channel 06

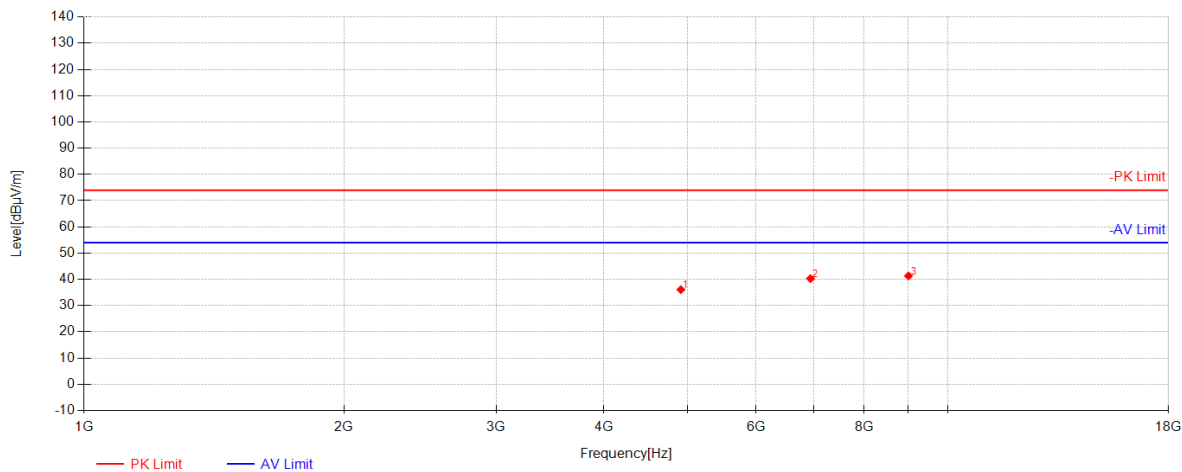


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4909.125	50.36	31.25	-45.54	36.07	74.00	37.93	Vertical
2	6936.75	49.29	34.89	-43.90	40.28	74.00	33.72	Vertical
3	9009.375	45.72	36.52	-40.94	41.30	74.00	32.70	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 119 of 180

802.11g_Channel 11

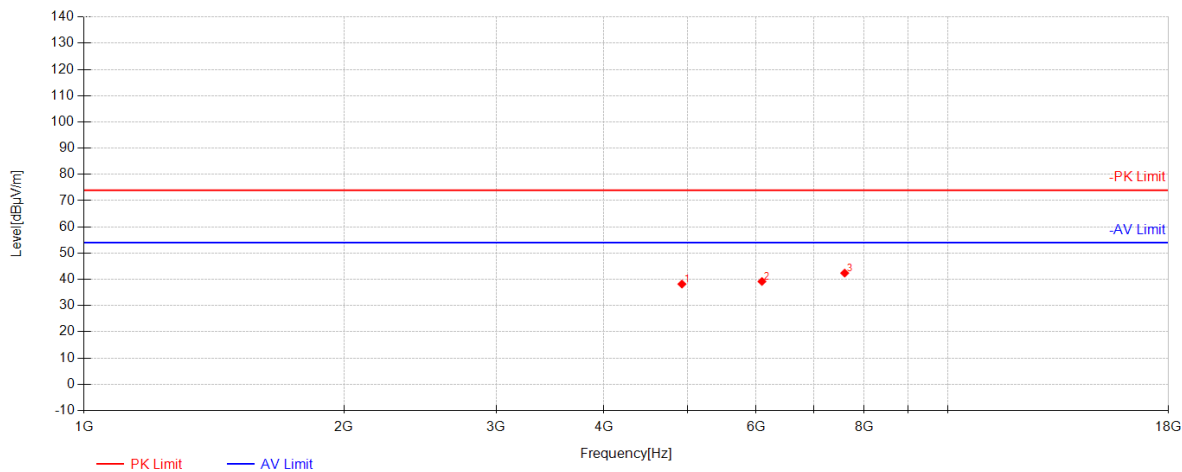


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4923.75	52.47	31.28	-45.56	38.19	74.00	35.81	Horizontal
2	6095.25	50.93	32.72	-44.47	39.19	74.00	34.81	Horizontal
3	7599.375	48.78	36.54	-42.93	42.39	74.00	31.61	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 120 of 180

802.11g_Channel 11

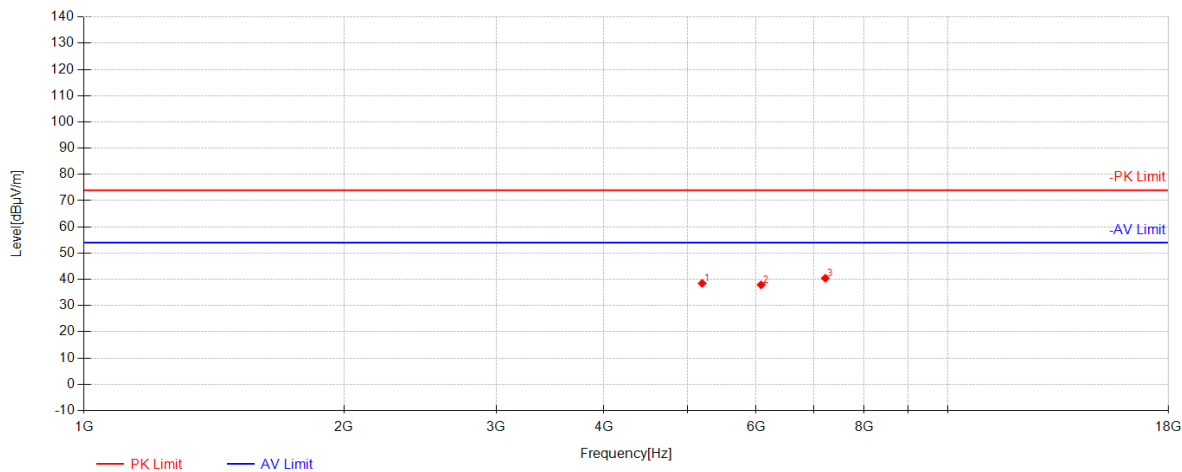


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5196.75	52.00	31.75	-45.28	38.47	74.00	35.53	Vertical
2	6081	49.74	32.68	-44.52	37.89	74.00	36.11	Vertical
3	7216.5	48.29	35.61	-43.47	40.42	74.00	33.58	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 121 of 180

802.11n20_Channel 01

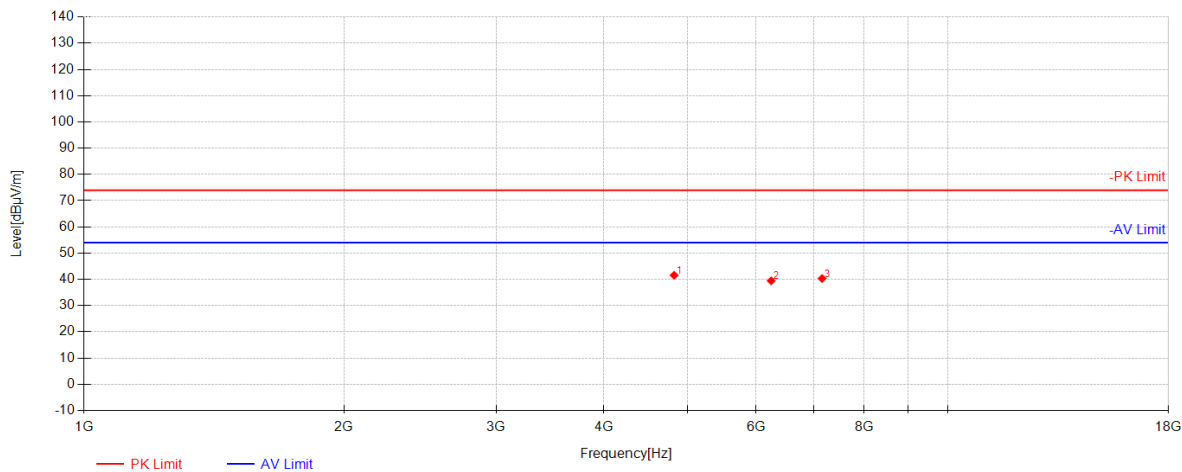


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4822.875	55.98	31.12	-45.54	41.56	74.00	32.44	Horizontal
2	6246.75	50.86	33.24	-44.66	39.44	74.00	34.56	Horizontal
3	7155.75	48.66	35.44	-43.77	40.33	74.00	33.67	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 122 of 180

802.11n20_Channel 01

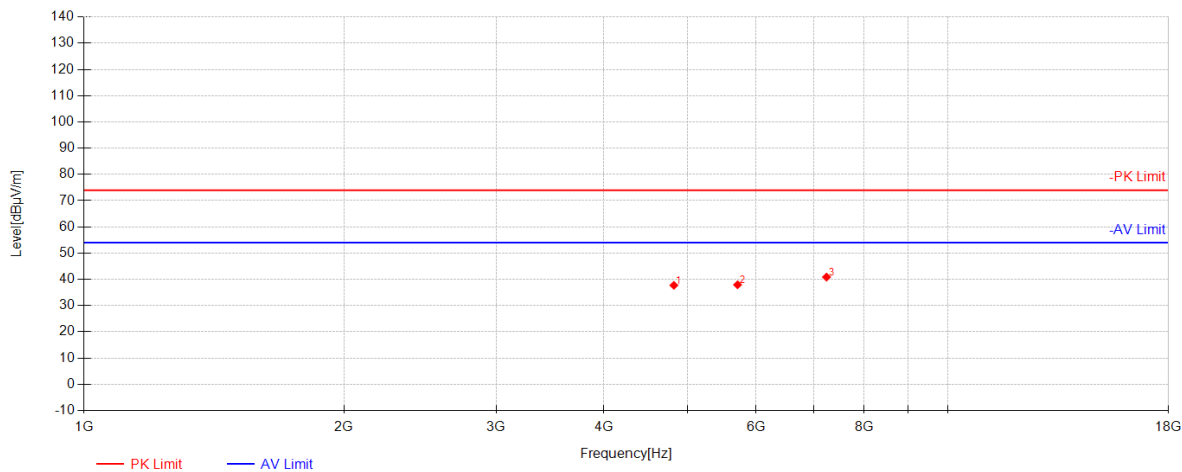


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4819.125	52.14	31.11	-45.54	37.71	74.00	36.29	Vertical
2	5711.625	50.43	32.34	-44.84	37.93	74.00	36.07	Vertical
3	7240.875	48.74	35.67	-43.55	40.86	74.00	33.14	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 123 of 180

802.11n20_Channel 06

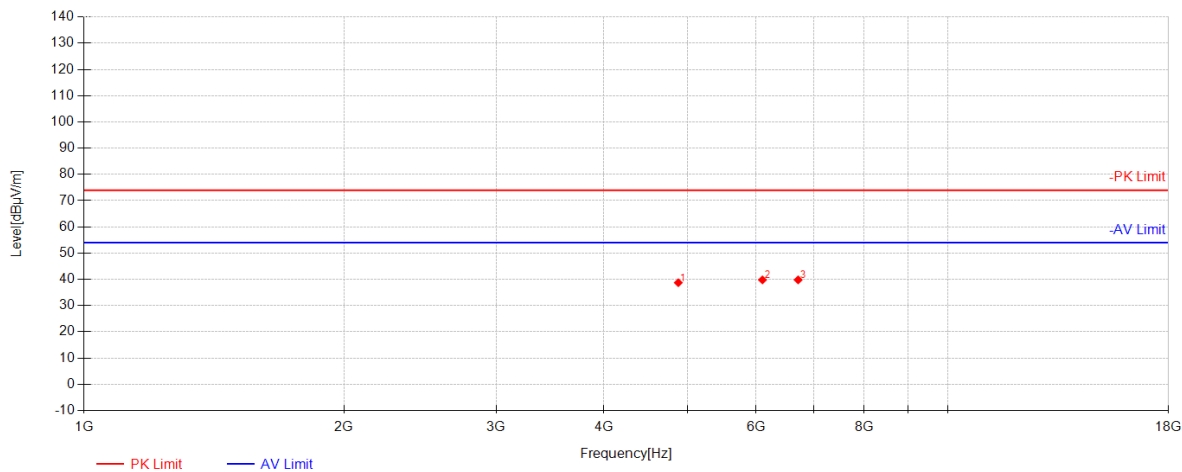


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4876.5	53.05	31.20	-45.53	38.72	74.00	35.28	Horizontal
2	6103.125	51.50	32.75	-44.46	39.79	74.00	34.21	Horizontal
3	6712.125	49.17	34.48	-43.85	39.80	74.00	34.20	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 124 of 180

802.11n20_Channel 06

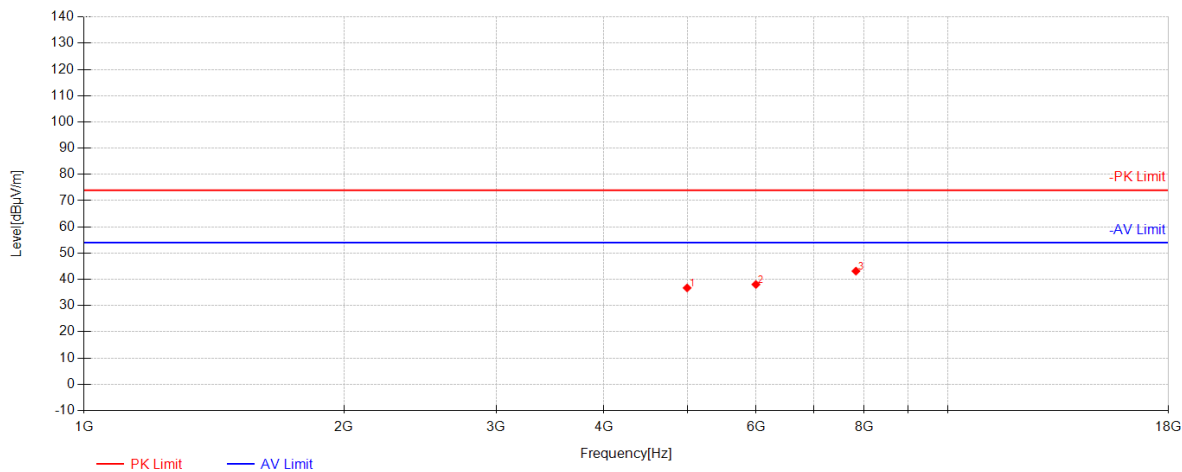


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4992.375	50.97	31.39	-45.63	36.73	74.00	37.27	Vertical
2	5997.75	50.47	32.40	-44.83	38.04	74.00	35.96	Vertical
3	7831.5	48.74	36.86	-42.47	43.13	74.00	30.87	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 125 of 180

802.11n20_Channel 11

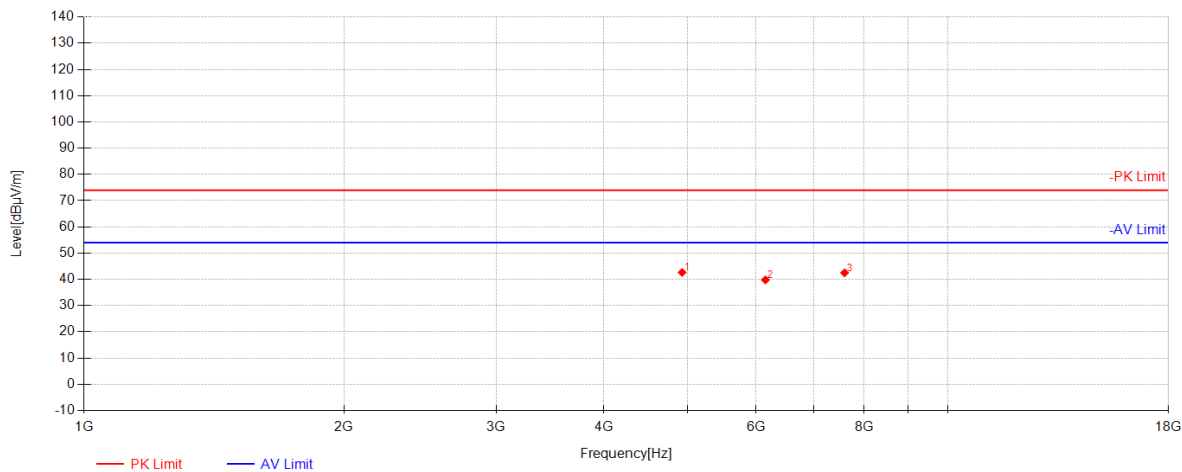


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4926	56.92	31.28	-45.56	42.64	74.00	31.36	Horizontal
2	6151.125	51.48	32.91	-44.61	39.79	74.00	34.21	Horizontal
3	7597.125	48.88	36.54	-42.94	42.48	74.00	31.52	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 126 of 180

802.11n20_Channel 11

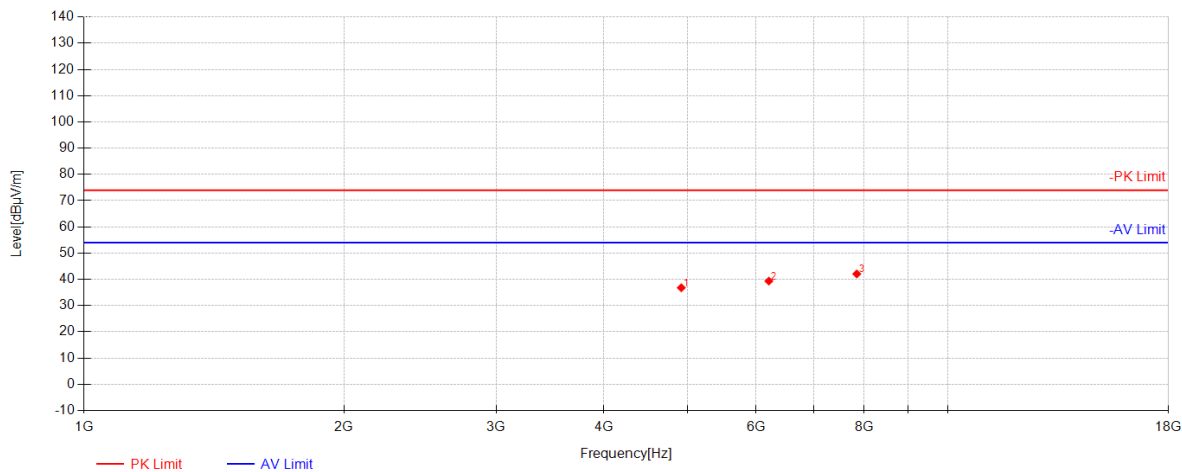


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4915.5	51.07	31.26	-45.55	36.79	74.00	37.21	Vertical
2	6208.125	50.97	33.11	-44.74	39.34	74.00	34.66	Vertical
3	7849.125	47.74	36.89	-42.56	42.07	74.00	31.93	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 127 of 180

802.11ax20_Channel 01

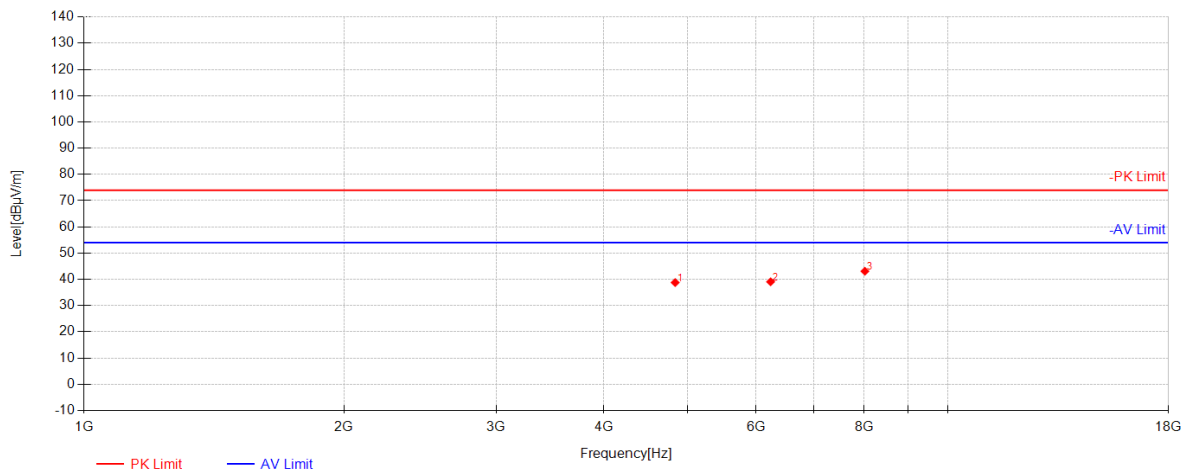


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4836	53.17	31.14	-45.54	38.77	74.00	35.23	Horizontal
2	6237.375	50.54	33.21	-44.68	39.07	74.00	34.93	Horizontal
3	8020.5	48.14	37.09	-42.15	43.08	74.00	30.92	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 128 of 180

802.11ax20_Channel 01

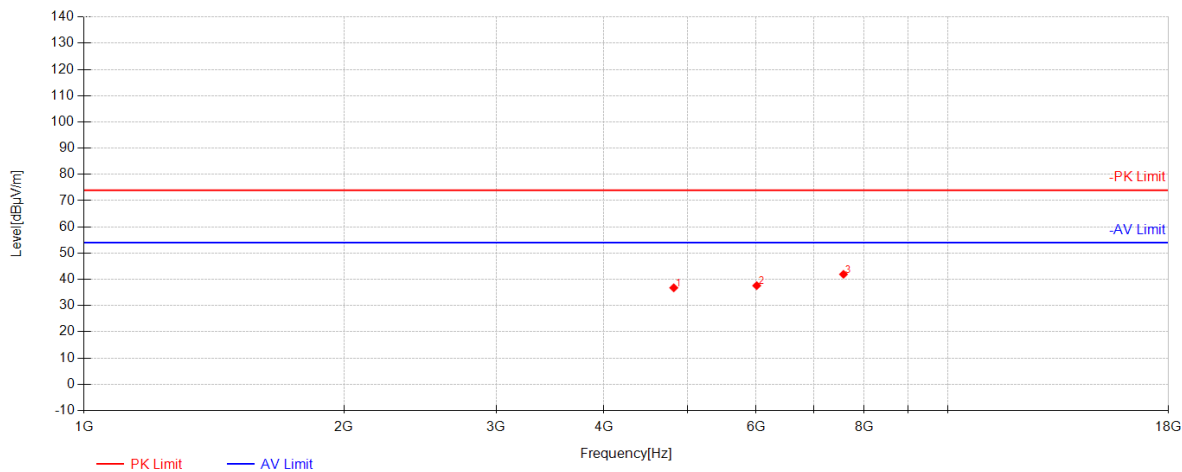


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4817.625	51.20	31.11	-45.54	36.77	74.00	37.23	Vertical
2	6010.5	49.95	32.44	-44.79	37.60	74.00	36.40	Vertical
3	7575.75	48.40	36.51	-42.98	41.93	74.00	32.07	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 129 of 180

802.11ax20_Channel 06

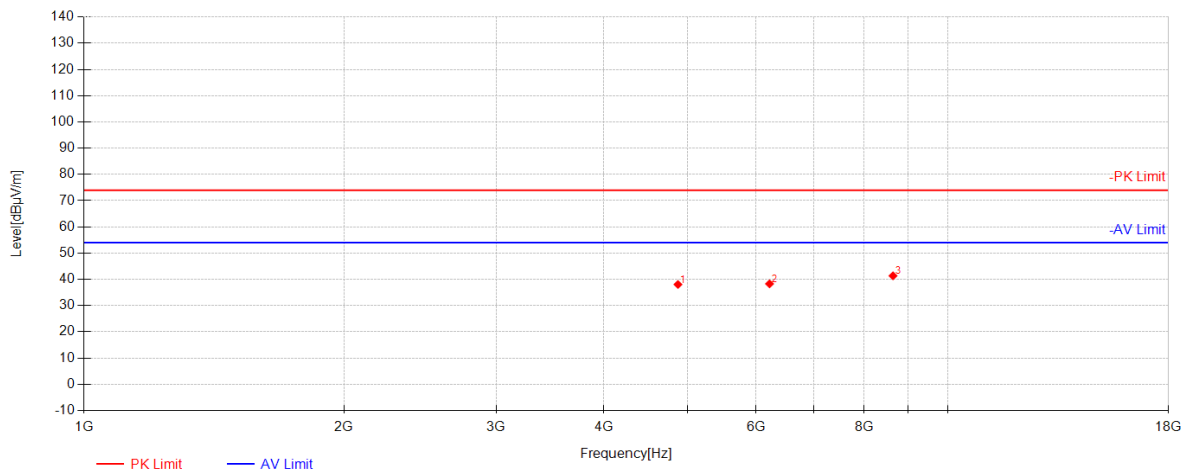


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4872	52.38	31.20	-45.53	38.04	74.00	35.96	Horizontal
2	6219.375	49.85	33.15	-44.72	38.28	74.00	35.72	Horizontal
3	8644.5	46.13	36.71	-41.49	41.35	74.00	32.65	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 130 of 180

802.11ax20_Channel 06

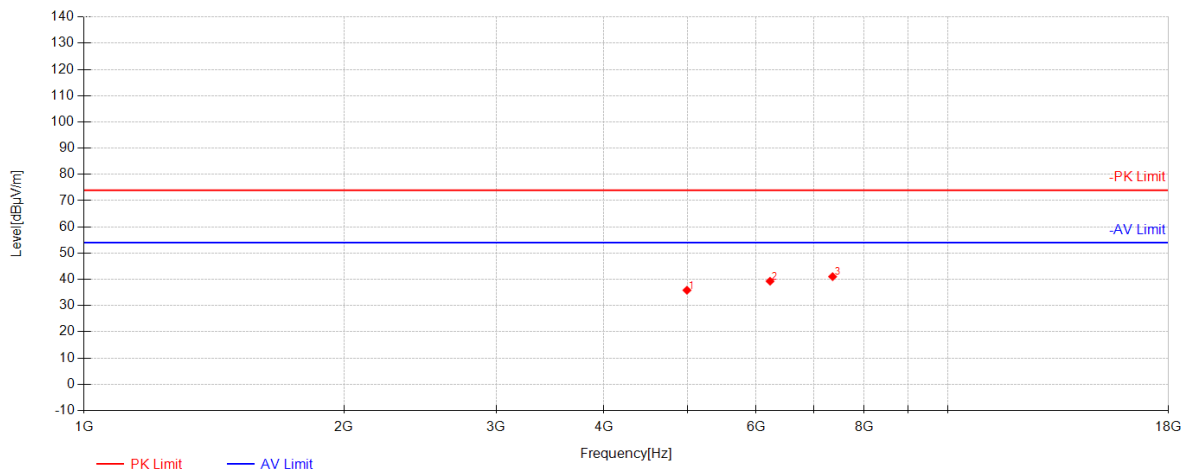


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4990.5	50.09	31.38	-45.63	35.85	74.00	38.15	Vertical
2	6228.375	50.81	33.18	-44.70	39.29	74.00	34.71	Vertical
3	7359	48.57	36.01	-43.55	41.03	74.00	32.97	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 131 of 180

802.11ax20_Channel 11

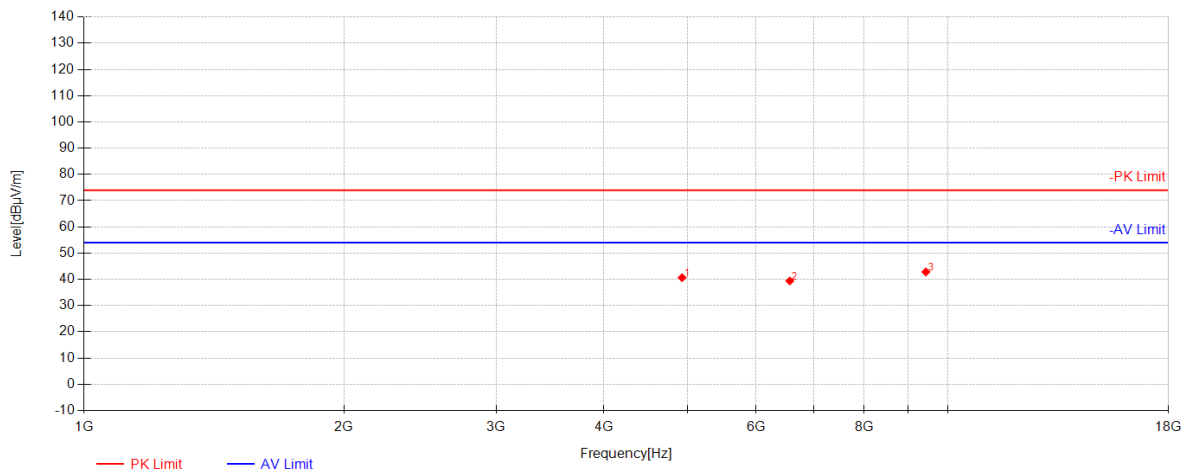

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4925.25	54.93	31.28	-45.56	40.65	74.00	33.35	Horizontal
2	6564.75	49.62	34.22	-44.44	39.39	74.00	34.61	Horizontal
3	9436.5	45.42	37.37	-39.98	42.82	74.00	31.18	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203

Rev.: 01

Page: 132 of 180

802.11ax20_Channel 11

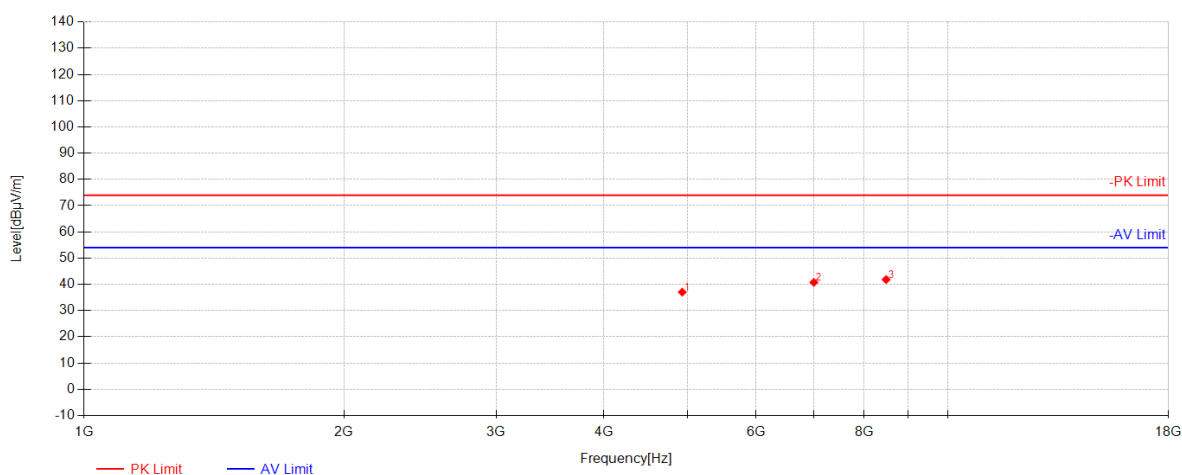

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4927.875	51.30	31.28	-45.56	37.02	74.00	36.98	Vertical
2	7000.5	49.29	35.00	-43.55	40.74	74.00	33.26	Vertical
3	8486.625	46.61	36.81	-41.60	41.82	74.00	32.18	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
Level = Reading(dBμV) + AF(dB/m) + Factor(dB):
AF = Antenna Factor(dB/m)
Factor = Cable Factor(dB) - Preamplifier gain(dB)
Margin = Limit(dBμV/m) – Level(dBμV/m)
- All channels have been tested, but only the worst case data displayed in this report.
- Both peak and average measured complies with the limit line, so test result is "PASS"




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 133 of 180

Restricted bands around fundamental frequency

802.11b_Channel 01

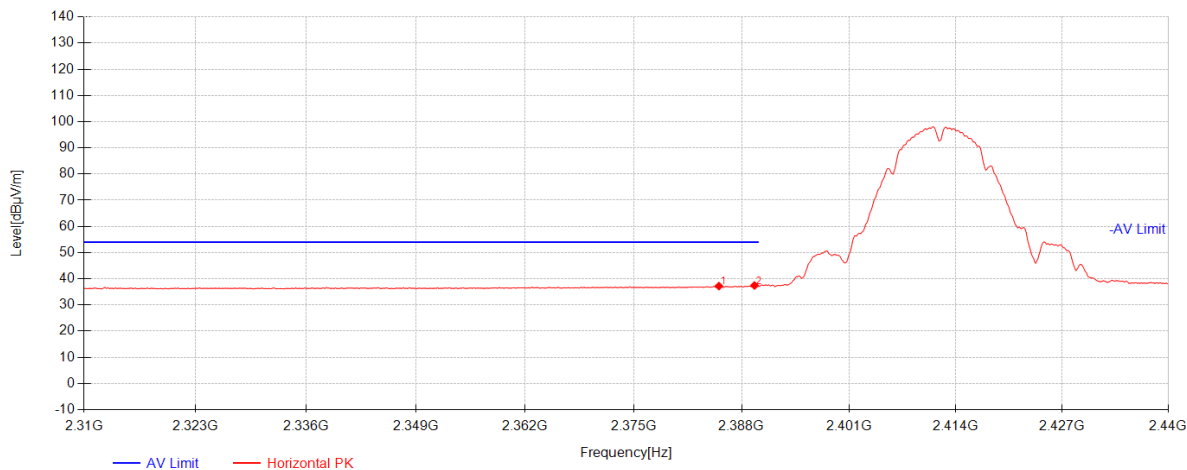


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.27	33.80	26.97	-23.57	37.20	54.00	16.80	Horizontal
2	2389.56	34.03	26.98	-23.57	37.44	54.00	16.56	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 134 of 180

802.11b_Channel 01

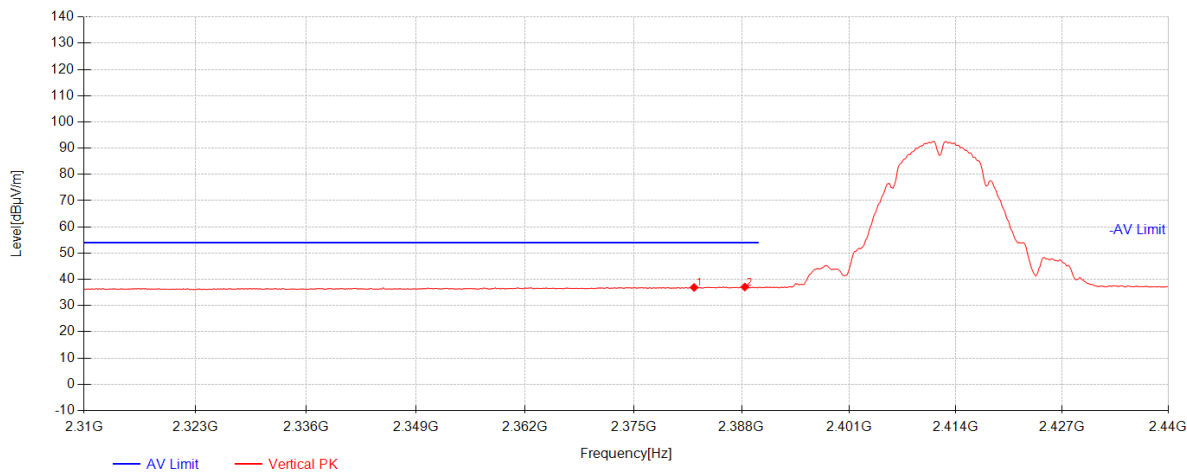


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2382.28	33.52	26.96	-23.57	36.91	54.00	17.09	Vertical
2	2388.39	33.67	26.98	-23.57	37.08	54.00	16.92	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 135 of 180

802.11b_Channel 01

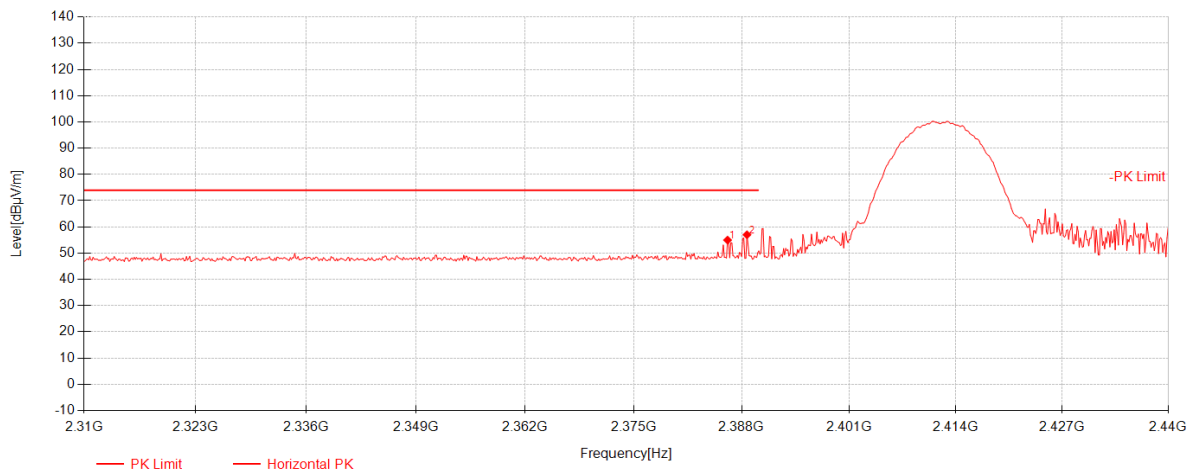


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.31	51.58	26.97	-23.57	54.98	74.00	19.02	Horizontal
2	2388.65	53.59	26.98	-23.57	57.00	74.00	17.00	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 136 of 180

802.11b_Channel 01

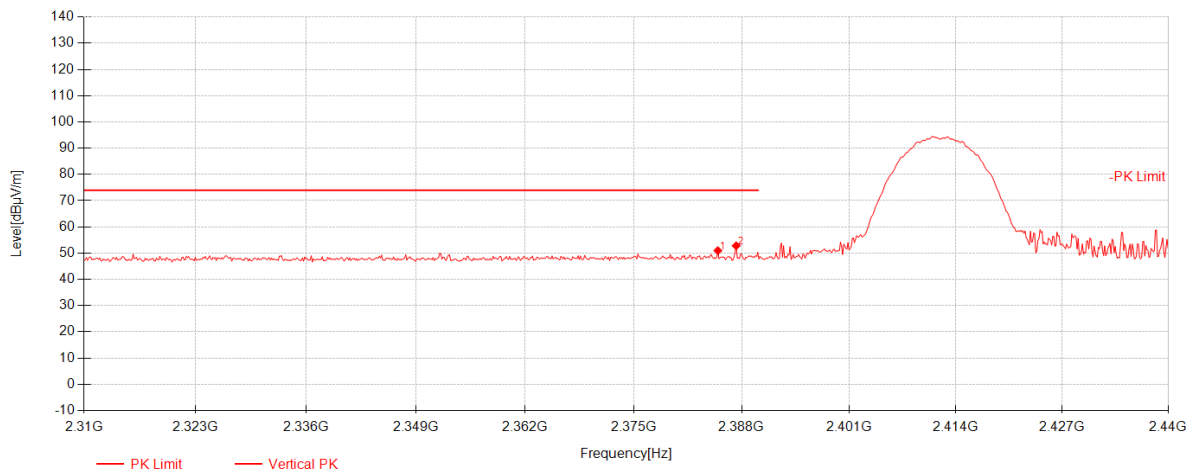


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.14	47.56	26.97	-23.57	50.96	74.00	23.04	Vertical
2	2387.35	49.40	26.97	-23.57	52.80	74.00	21.20	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 137 of 180

802.11b_Channel 11

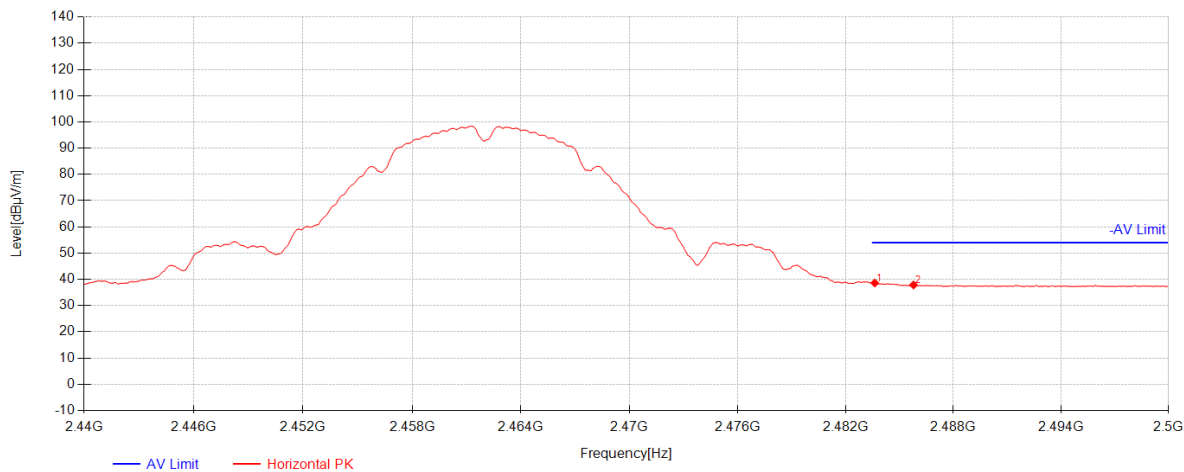


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	34.98	27.17	-23.54	38.60	54.00	15.40	Horizontal
2	2485.78	34.22	27.17	-23.54	37.85	54.00	16.15	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 138 of 180

802.11b_Channel 11

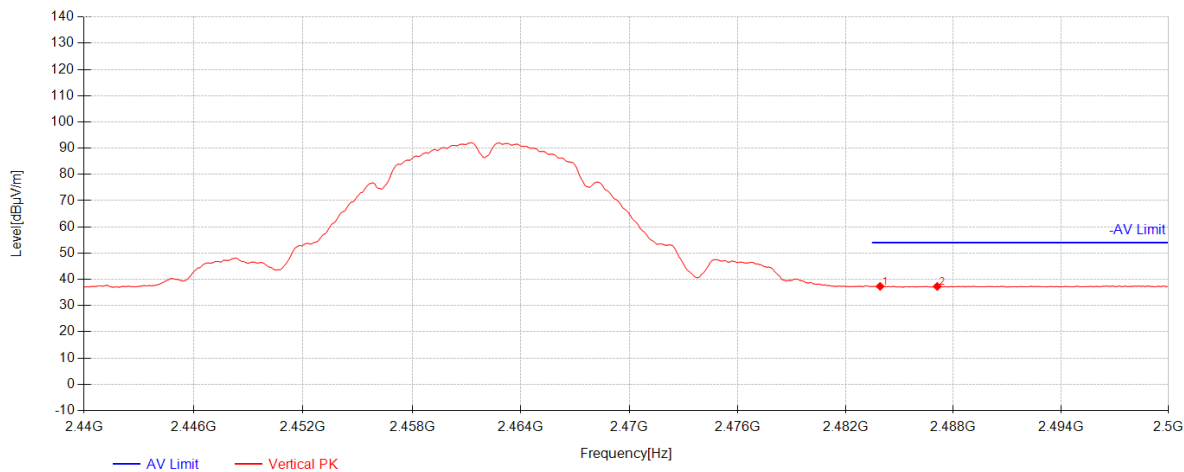


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.92	33.70	27.17	-23.54	37.32	54.00	16.68	Vertical
2	2487.1	33.66	27.17	-23.54	37.29	54.00	16.71	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 139 of 180

802.11b_Channel 11

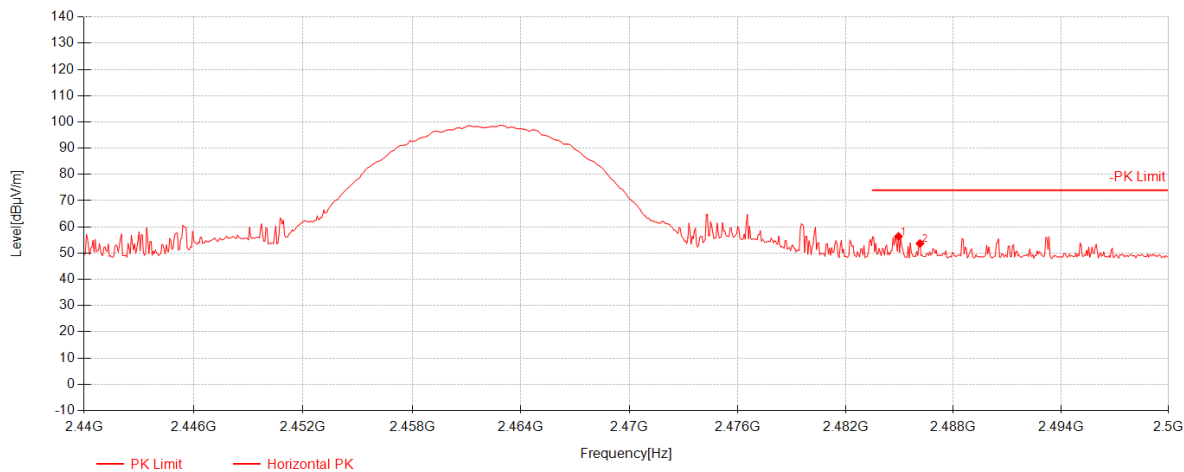


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.94	52.74	27.17	-23.54	56.37	74.00	17.63	Horizontal
2	2486.14	50.04	27.17	-23.54	53.67	74.00	20.33	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 140 of 180

802.11b_Channel 11

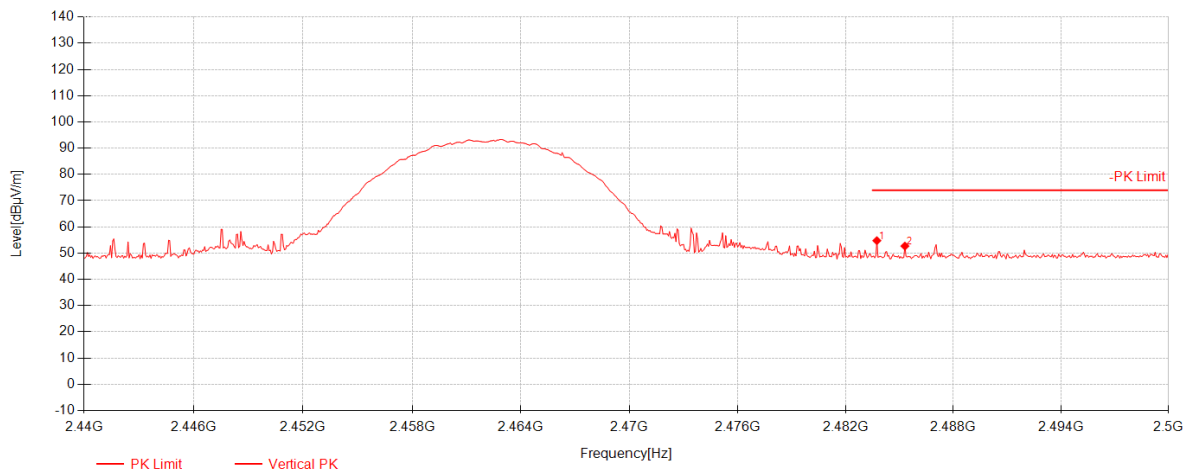


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.74	51.13	27.17	-23.54	54.75	74.00	19.25	Vertical
2	2485.3	49.06	27.17	-23.54	52.69	74.00	21.31	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 141 of 180

802.11b_Channel 01

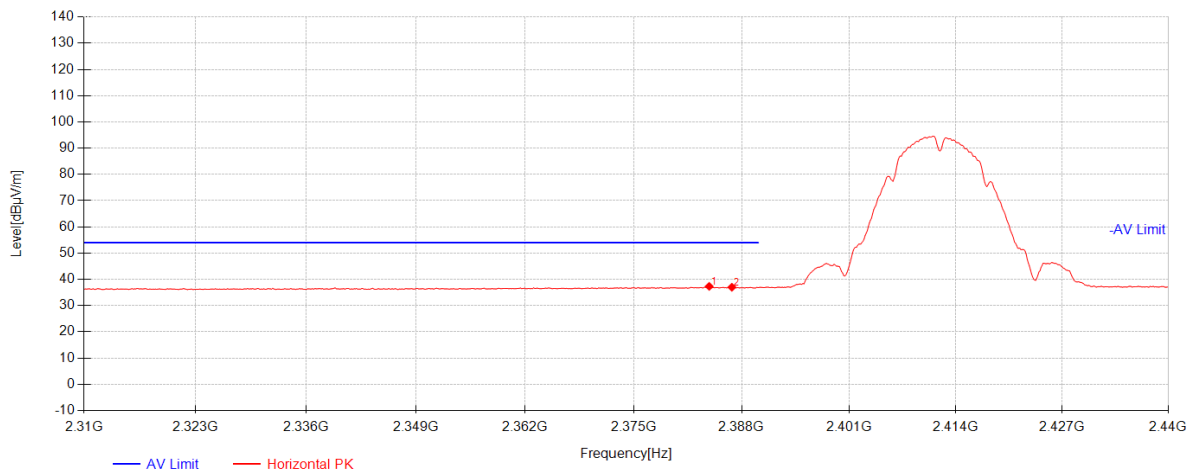


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.1	33.92	26.97	-23.57	37.32	54.00	16.68	Horizontal
2	2386.83	33.59	26.97	-23.57	36.99	54.00	17.01	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 142 of 180

802.11b_Channel 01

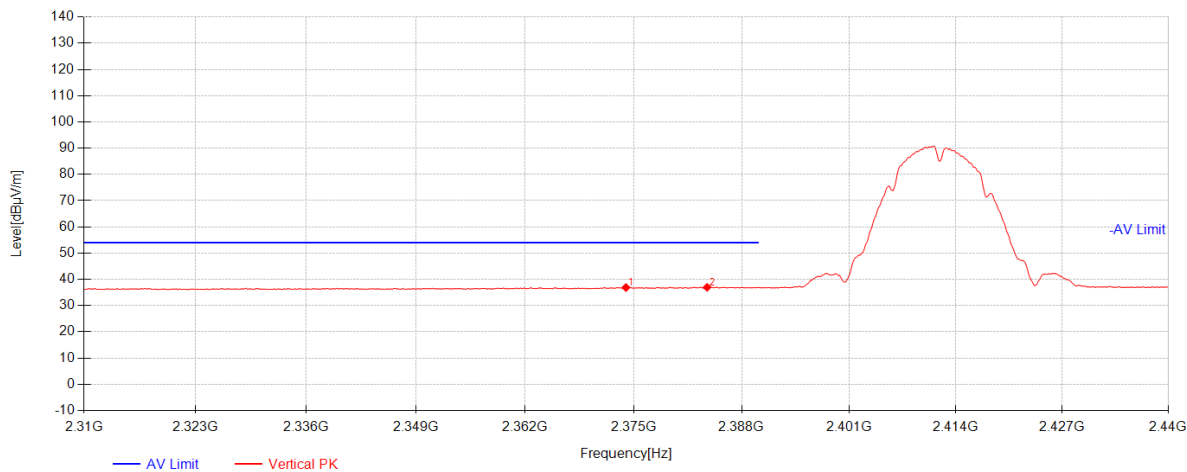


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2374.09	33.50	26.95	-23.57	36.88	54.00	17.12	Vertical
2	2383.84	33.56	26.97	-23.57	36.96	54.00	17.04	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 143 of 180

802.11b_Channel 01

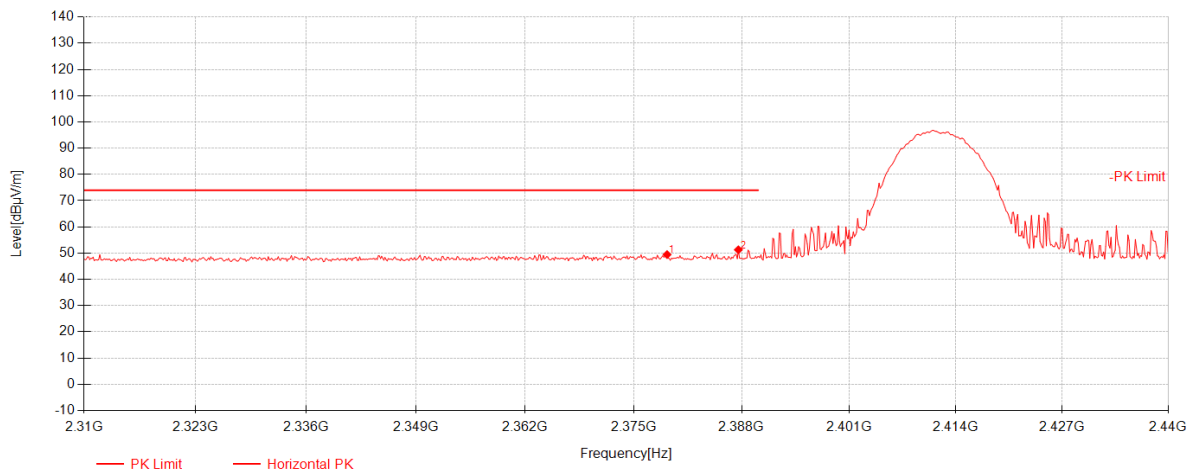


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.03	46.05	26.96	-23.57	49.44	74.00	24.56	Horizontal
2	2387.61	47.87	26.98	-23.57	51.27	74.00	22.73	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 144 of 180

802.11b_Channel 01

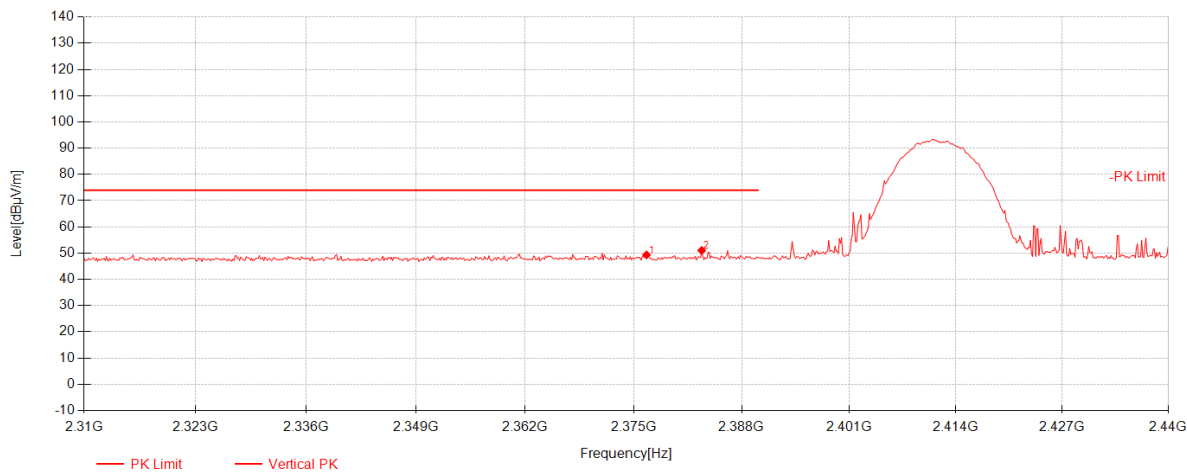


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2376.56	45.94	26.95	-23.57	49.32	74.00	24.68	Vertical
2	2383.19	47.62	26.97	-23.57	51.01	74.00	22.99	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 145 of 180

802.11b_Channel 11

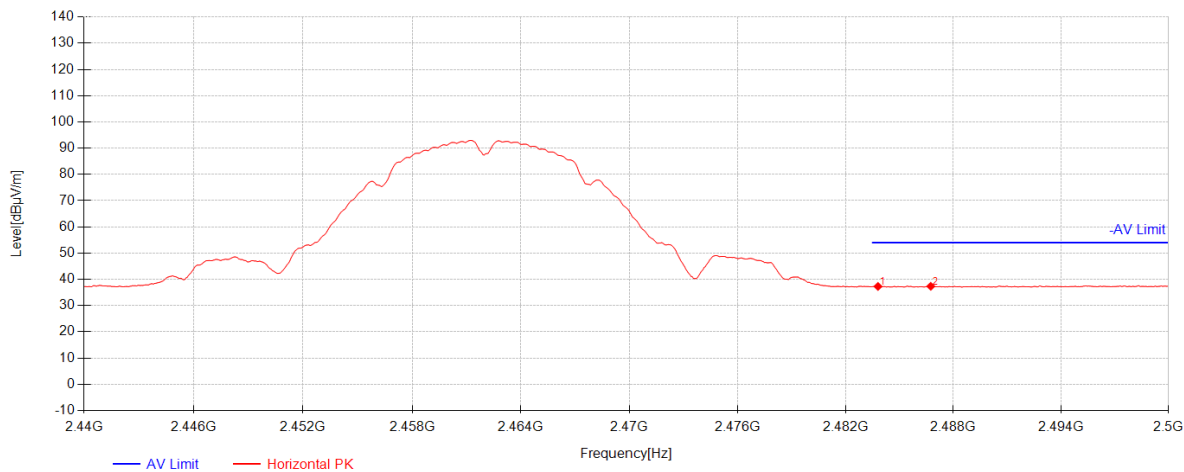


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.8	33.68	27.17	-23.54	37.30	54.00	16.70	Horizontal
2	2486.74	33.72	27.17	-23.54	37.35	54.00	16.65	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 146 of 180

802.11b_Channel 11

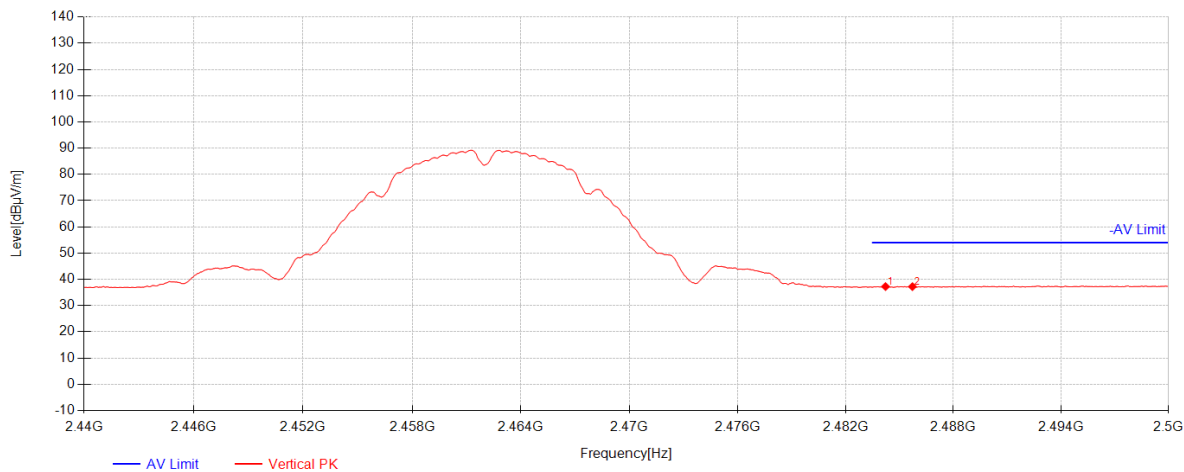


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.22	33.62	27.17	-23.54	37.24	54.00	16.76	Vertical
2	2485.72	33.59	27.17	-23.54	37.22	54.00	16.78	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 147 of 180

802.11b_Channel 11

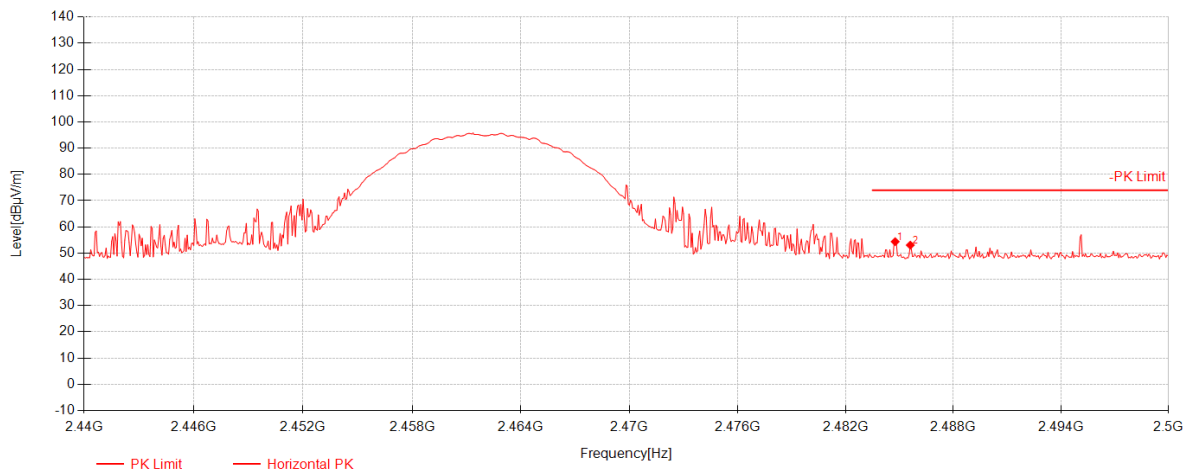


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.76	50.75	27.17	-23.54	54.37	74.00	19.63	Horizontal
2	2485.6	49.41	27.17	-23.54	53.04	74.00	20.96	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 148 of 180

802.11b_Channel 11

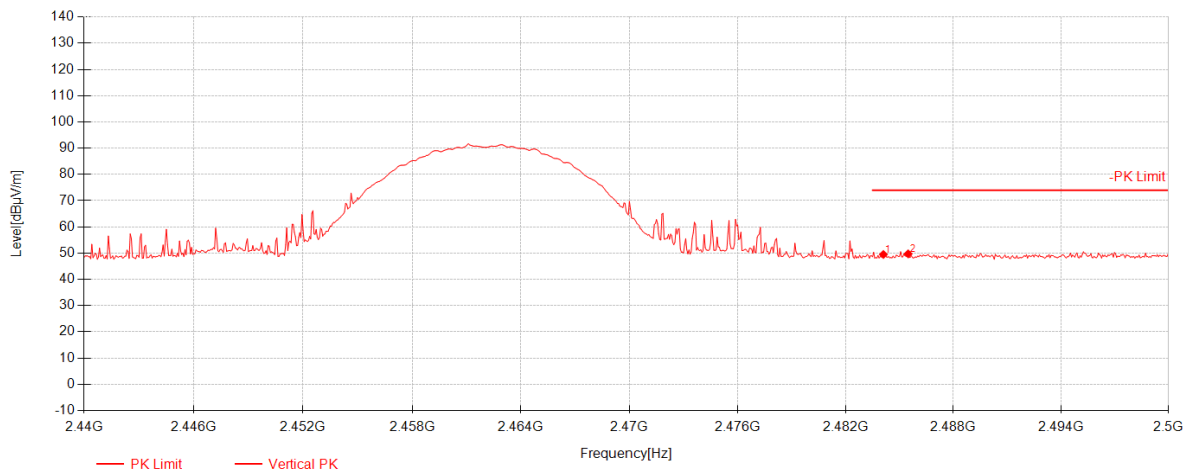


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.1	45.86	27.17	-23.54	49.48	74.00	24.52	Vertical
2	2485.48	46.09	27.17	-23.54	49.72	74.00	24.28	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 149 of 180

802.11g_Channel 01

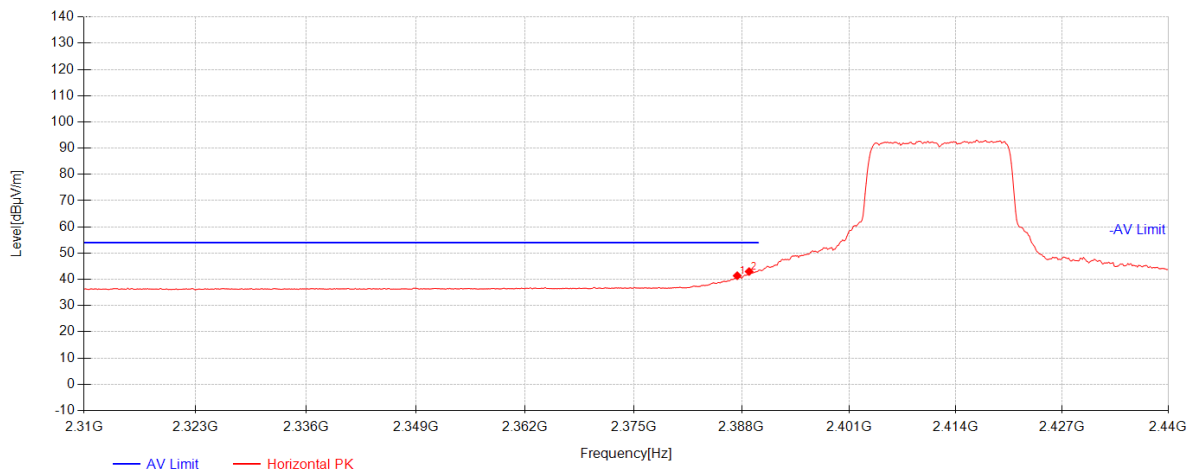


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.48	37.98	26.97	-23.57	41.38	54.00	12.62	Horizontal
2	2388.91	39.56	26.98	-23.57	42.97	54.00	11.03	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 150 of 180

802.11g_Channel 01

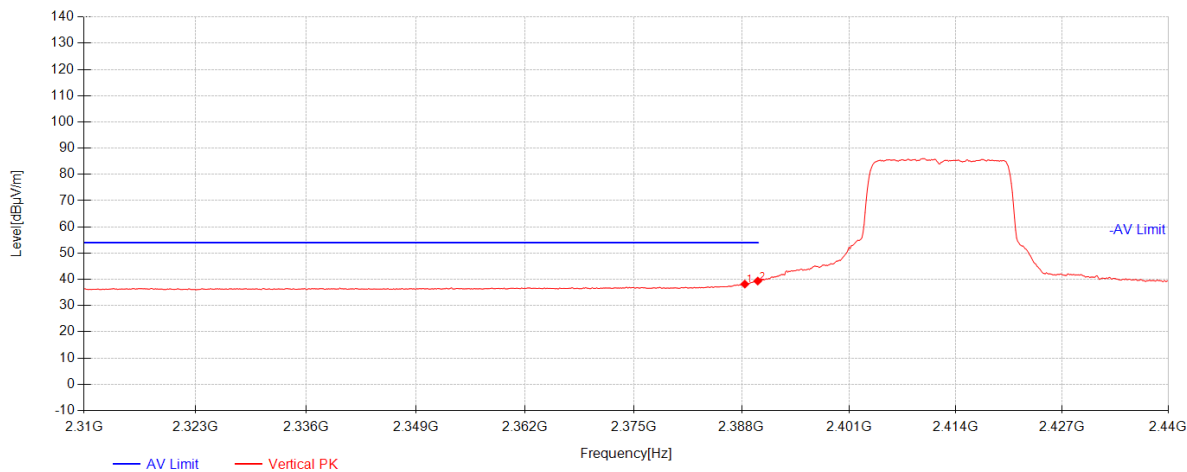


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.39	34.77	26.98	-23.57	38.18	54.00	15.82	Vertical
2	2389.95	35.94	26.98	-23.57	39.35	54.00	14.65	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 151 of 180

802.11g_Channel 01

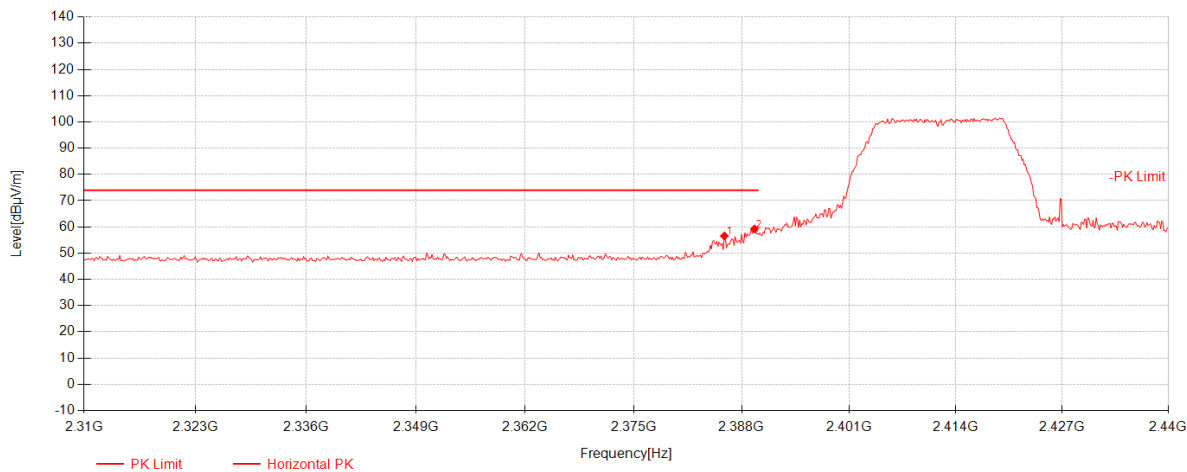


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.92	53.14	26.97	-23.57	56.54	74.00	17.46	Horizontal
2	2389.56	55.81	26.98	-23.57	59.22	74.00	14.78	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 152 of 180

802.11g_Channel 01

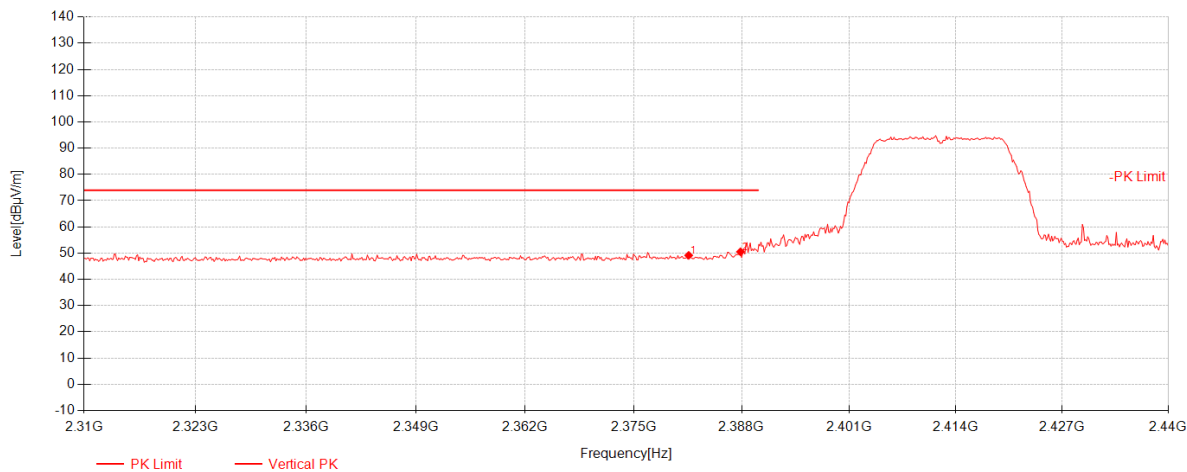


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2381.63	45.75	26.96	-23.57	49.14	74.00	24.86	Vertical
2	2387.87	47.11	26.98	-23.57	50.51	74.00	23.49	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 153 of 180

802.11g_Channel 11

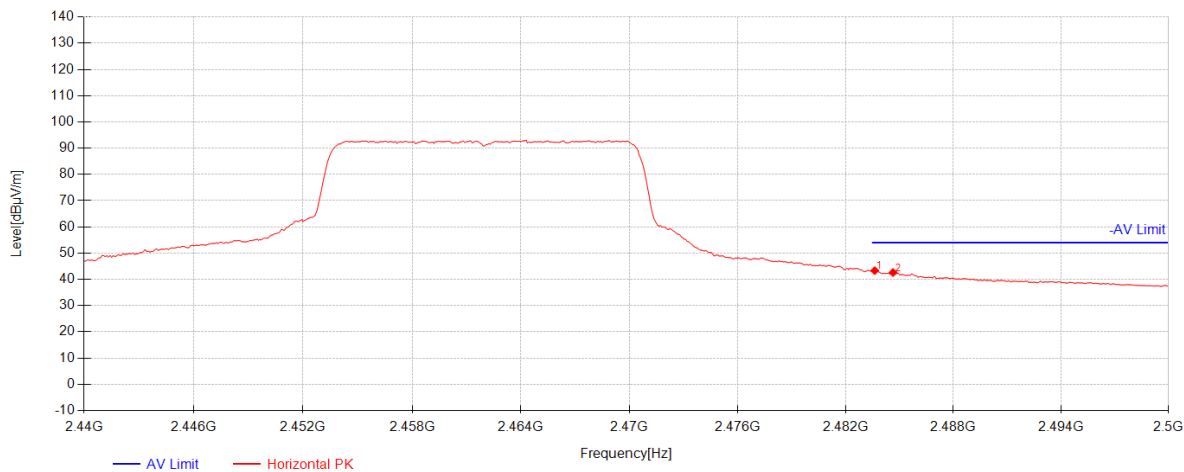


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	39.71	27.17	-23.54	43.33	54.00	10.67	Horizontal
2	2484.64	38.99	27.17	-23.54	42.61	54.00	11.39	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 154 of 180

802.11g_Channel 11

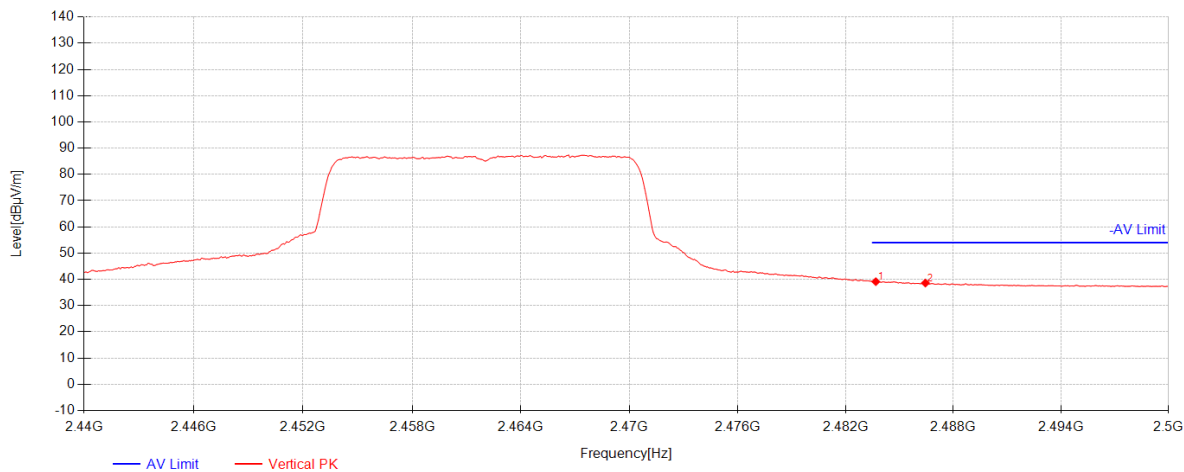


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	35.49	27.17	-23.54	39.11	54.00	14.89	Vertical
2	2486.44	34.96	27.17	-23.54	38.59	54.00	15.41	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 155 of 180

802.11g_Channel 11

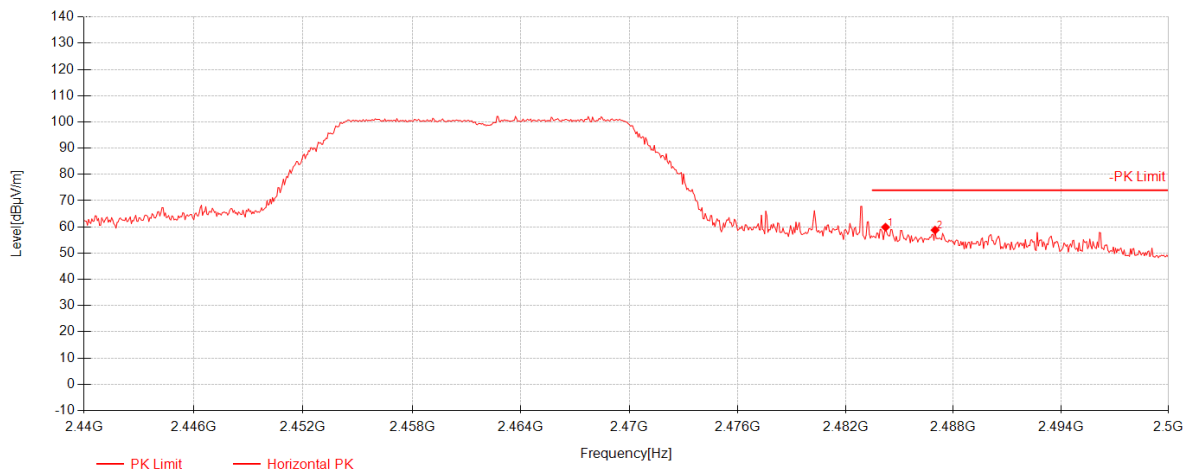


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.22	56.28	27.17	-23.54	59.90	74.00	14.10	Horizontal
2	2486.98	55.15	27.17	-23.54	58.78	74.00	15.22	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 156 of 180

802.11g_Channel 11

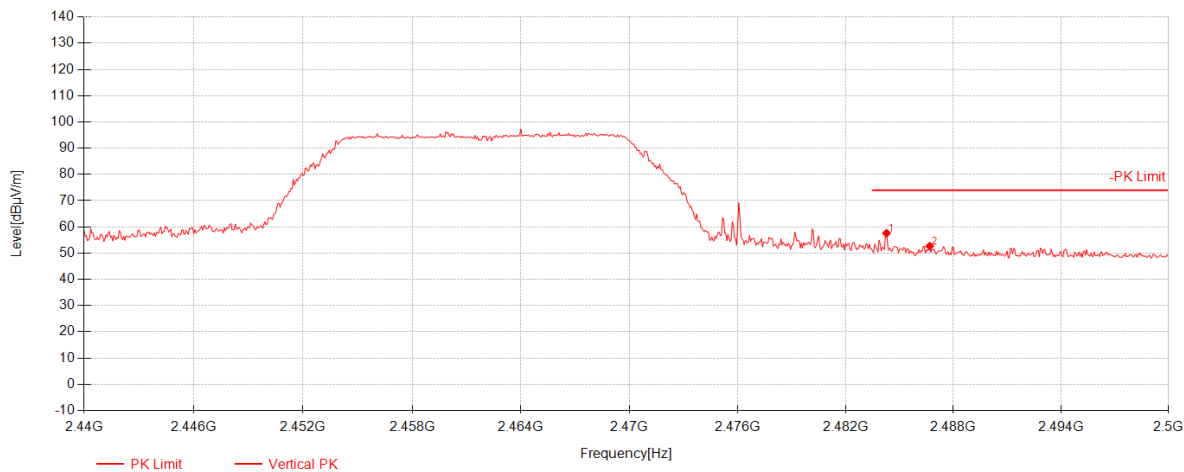


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.28	53.98	27.17	-23.54	57.60	74.00	16.40	Vertical
2	2486.68	49.03	27.17	-23.54	52.66	74.00	21.34	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 157 of 180

802.11g_Channel 01

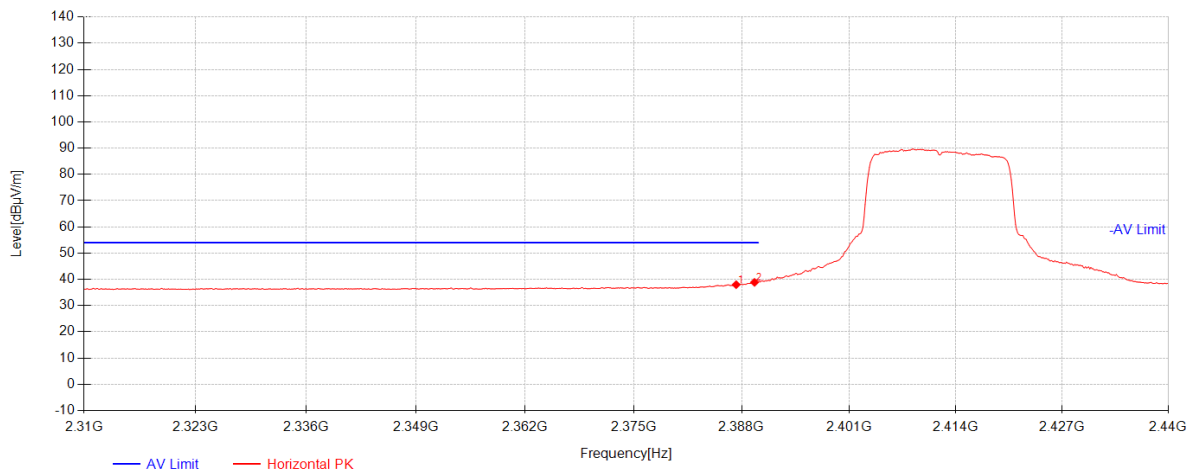


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.35	34.57	26.97	-23.57	37.97	54.00	16.03	Horizontal
2	2389.56	35.43	26.98	-23.57	38.84	54.00	15.16	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 158 of 180

802.11g_Channel 01

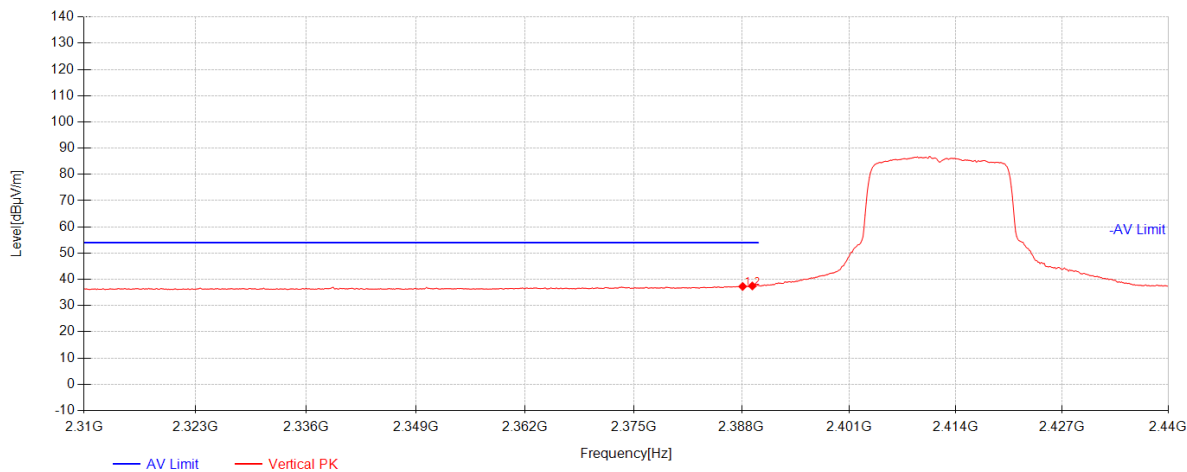


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.13	33.88	26.98	-23.57	37.29	54.00	16.71	Vertical
2	2389.3	34.07	26.98	-23.57	37.48	54.00	16.52	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 159 of 180

802.11g_Channel 01

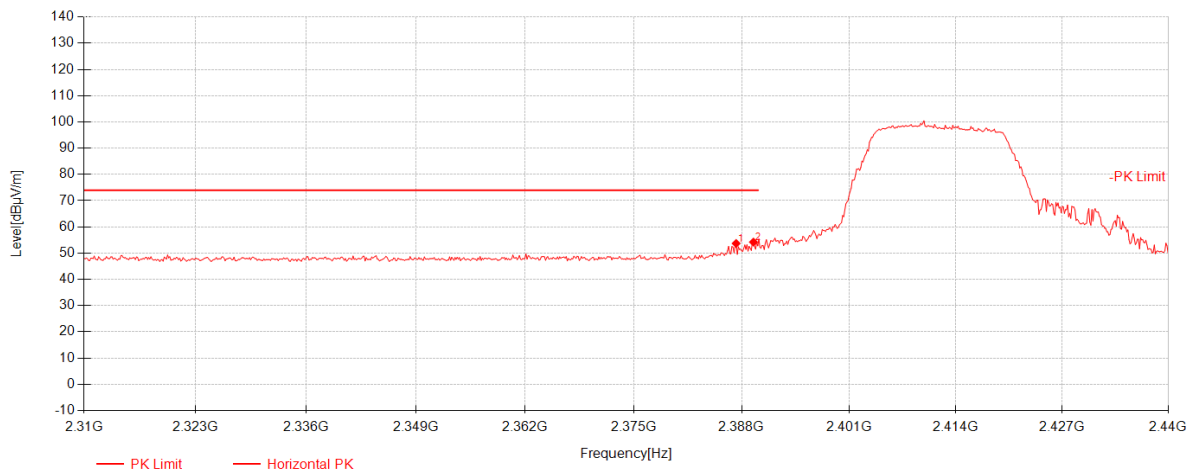


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.35	50.29	26.97	-23.57	53.69	74.00	20.31	Horizontal
2	2389.43	50.81	26.98	-23.57	54.22	74.00	19.78	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 160 of 180

802.11g_Channel 01

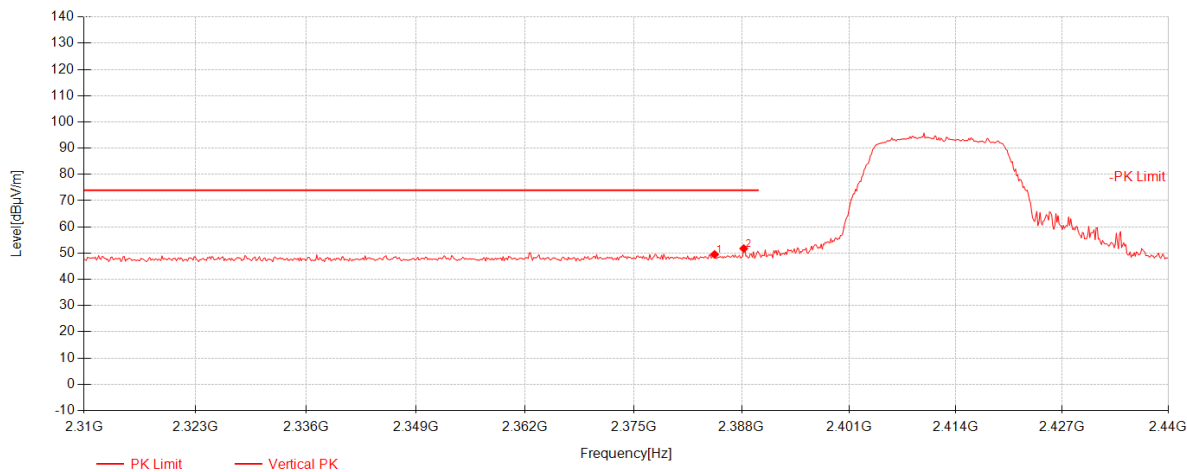


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.75	46.10	26.97	-23.57	49.50	74.00	24.50	Vertical
2	2388.26	48.33	26.98	-23.57	51.74	74.00	22.26	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 161 of 180

802.11g_Channel 11

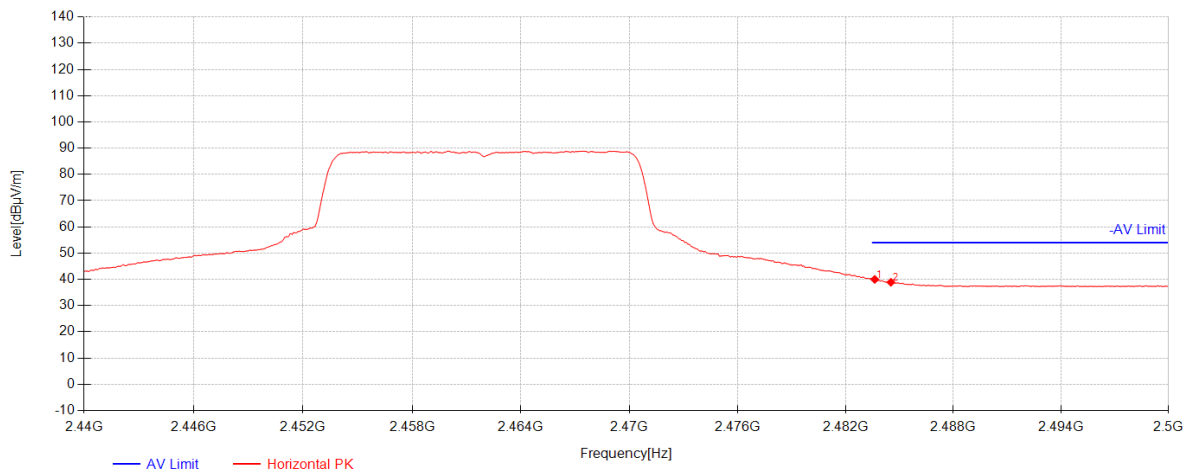


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	36.35	27.17	-23.54	39.97	54.00	14.03	Horizontal
2	2484.52	35.25	27.17	-23.54	38.87	54.00	15.13	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 162 of 180

802.11g_Channel 11

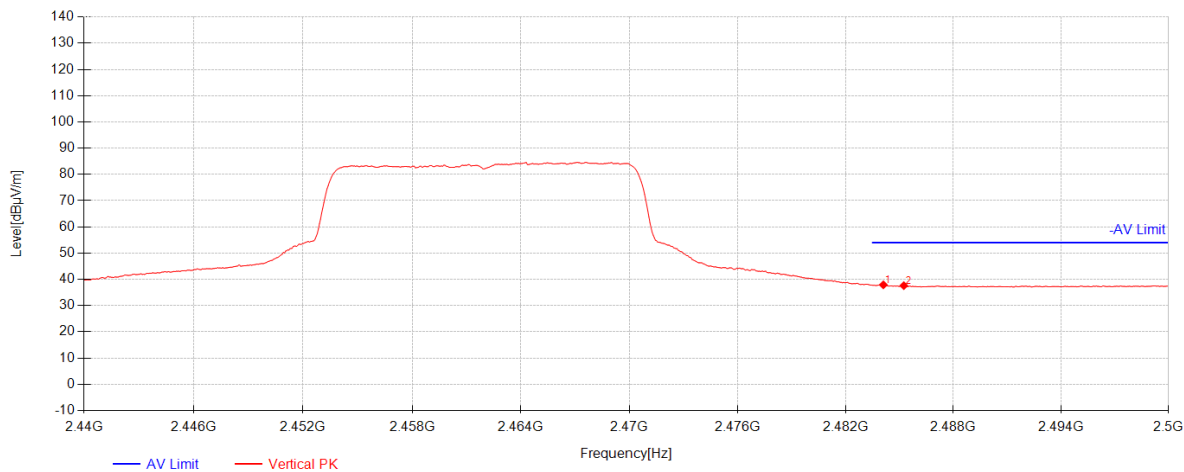


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.1	34.29	27.17	-23.54	37.91	54.00	16.09	Vertical
2	2485.24	33.97	27.17	-23.54	37.60	54.00	16.40	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 163 of 180

802.11g_Channel 11

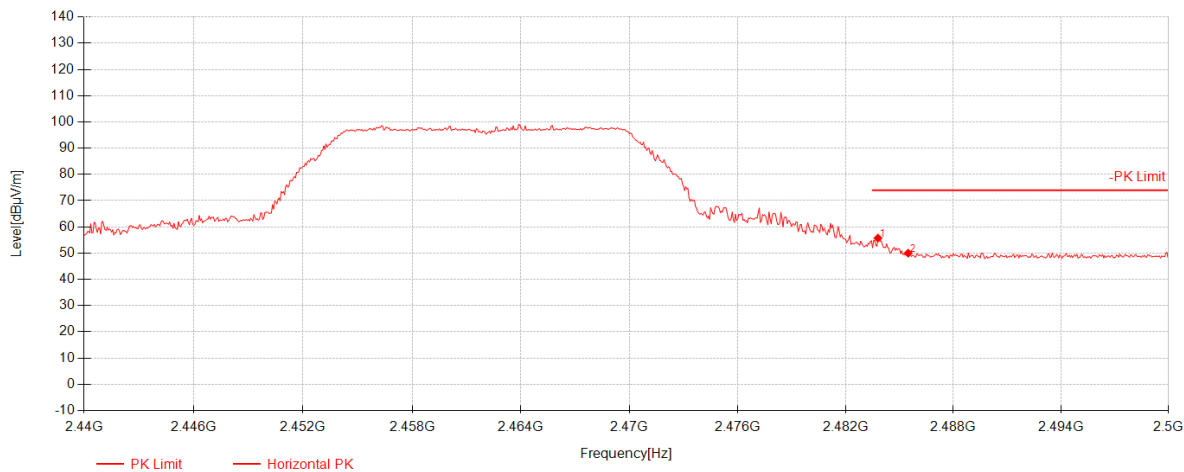


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.8	52.10	27.17	-23.54	55.72	74.00	18.28	Horizontal
2	2485.48	46.36	27.17	-23.54	49.99	74.00	24.01	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 164 of 180

802.11g_Channel 11

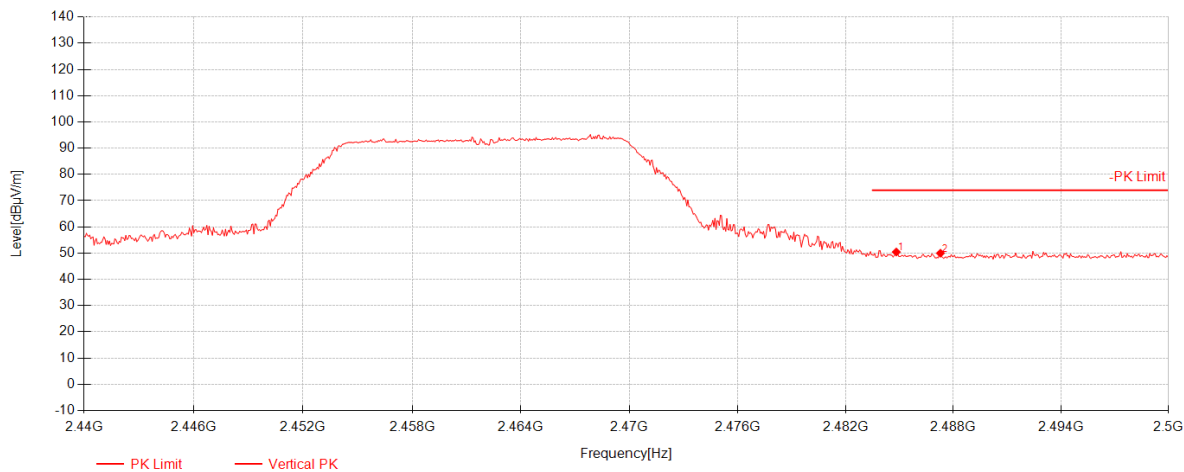


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.82	46.79	27.17	-23.54	50.42	74.00	23.58	Vertical
2	2487.28	46.34	27.17	-23.54	49.97	74.00	24.03	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 165 of 180

802.11n20_Channel 01

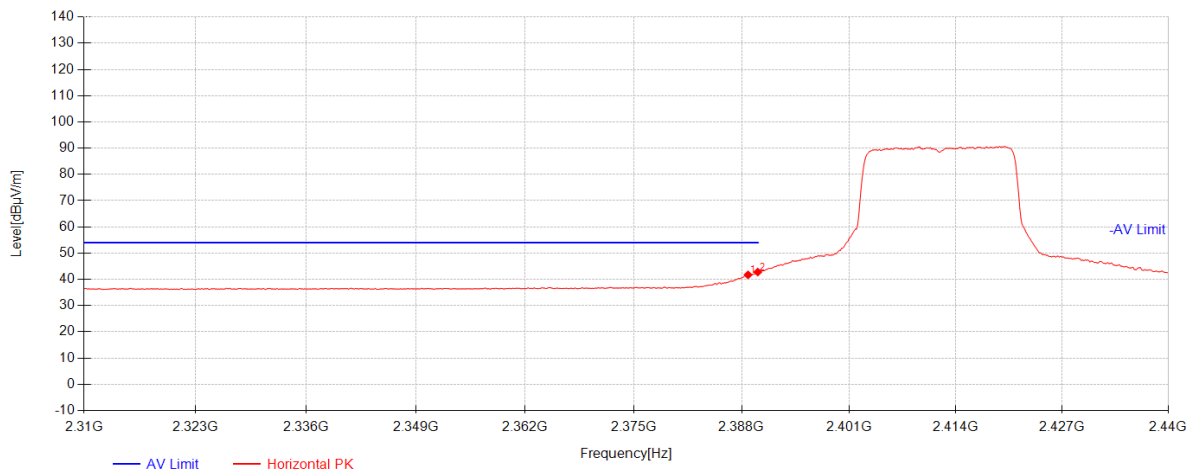


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.78	38.30	26.98	-23.57	41.71	54.00	12.29	Horizontal
2	2389.95	39.37	26.98	-23.57	42.78	54.00	11.22	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 166 of 180

802.11n20_Channel 01

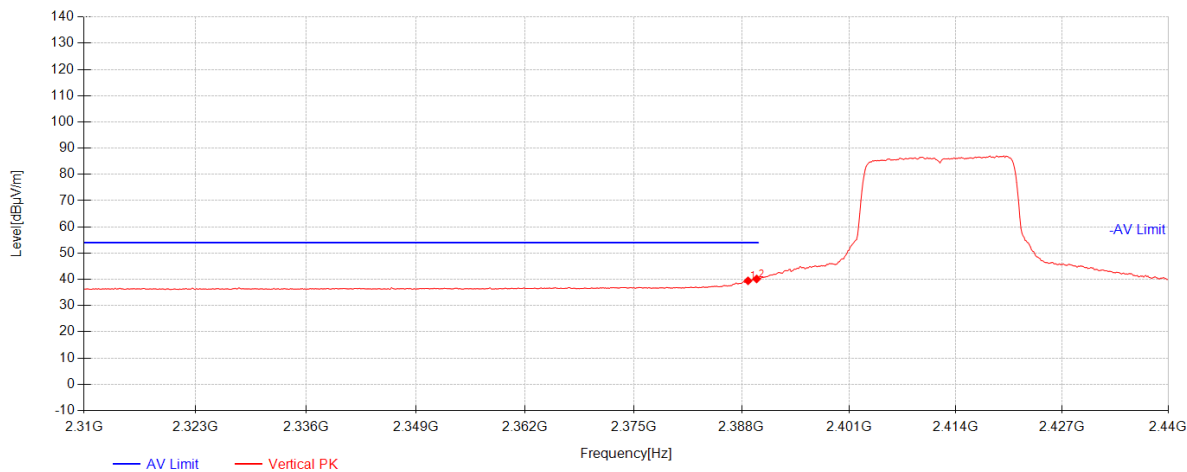


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.78	36.02	26.98	-23.57	39.43	54.00	14.57	Vertical
2	2389.82	36.74	26.98	-23.57	40.15	54.00	13.85	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 167 of 180

802.11n20_Channel 01

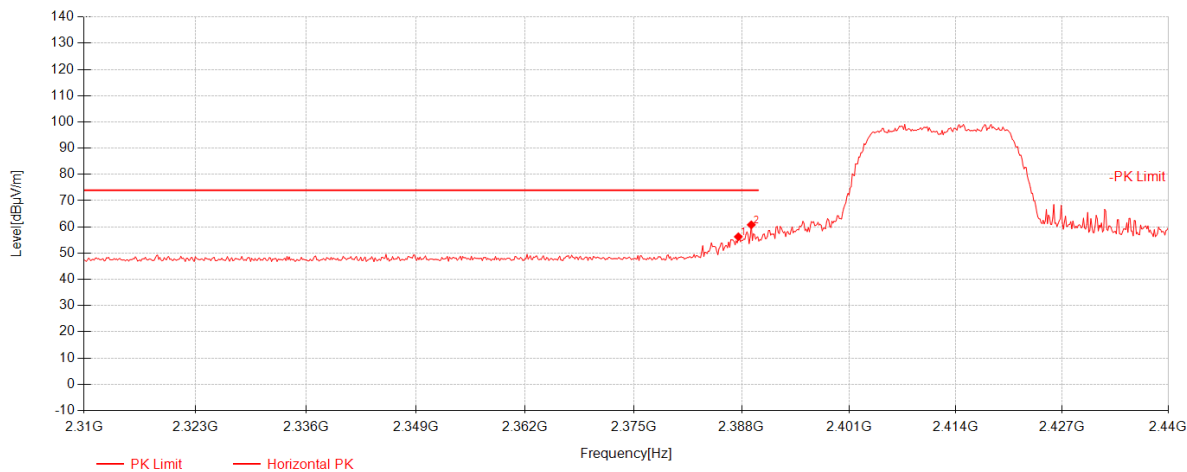


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.61	52.85	26.98	-23.57	56.25	74.00	17.75	Horizontal
2	2389.17	57.38	26.98	-23.57	60.79	74.00	13.21	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 168 of 180

802.11n20_Channel 01

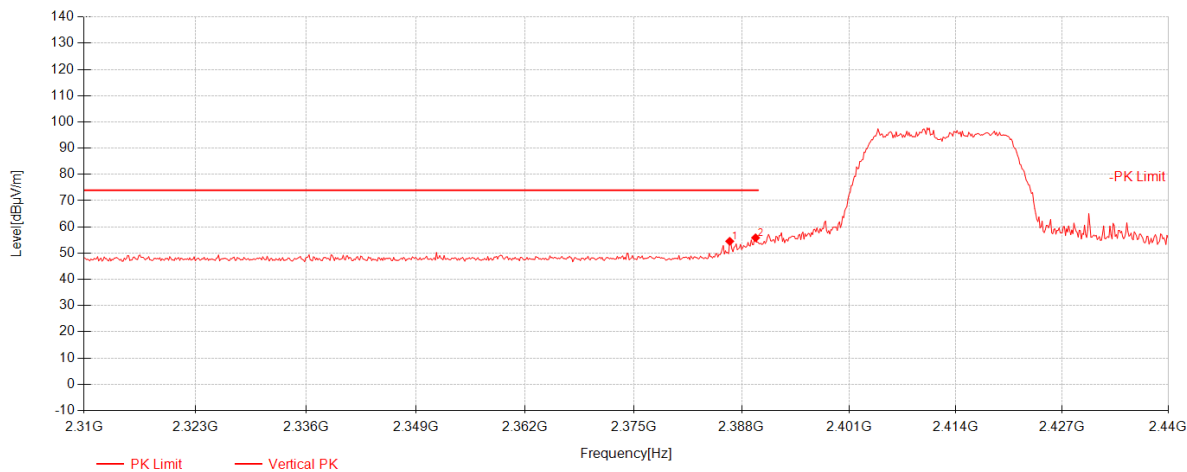


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.57	51.12	26.97	-23.57	54.52	74.00	19.48	Vertical
2	2389.69	52.43	26.98	-23.57	55.84	74.00	18.16	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 169 of 180

802.11n20_Channel 11

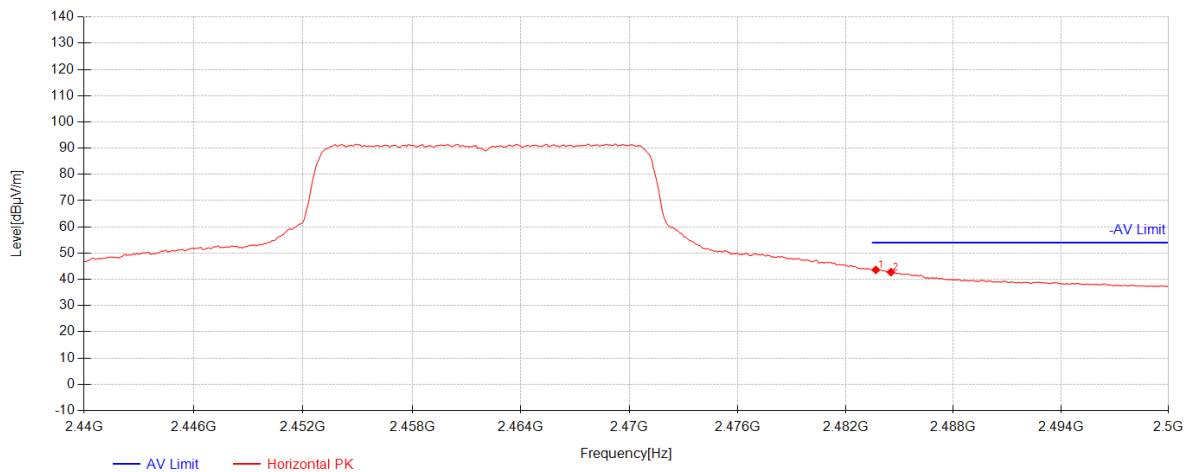


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	39.98	27.17	-23.54	43.60	54.00	10.40	Horizontal
2	2484.52	39.13	27.17	-23.54	42.75	54.00	11.25	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 170 of 180

802.11n20_Channel 11

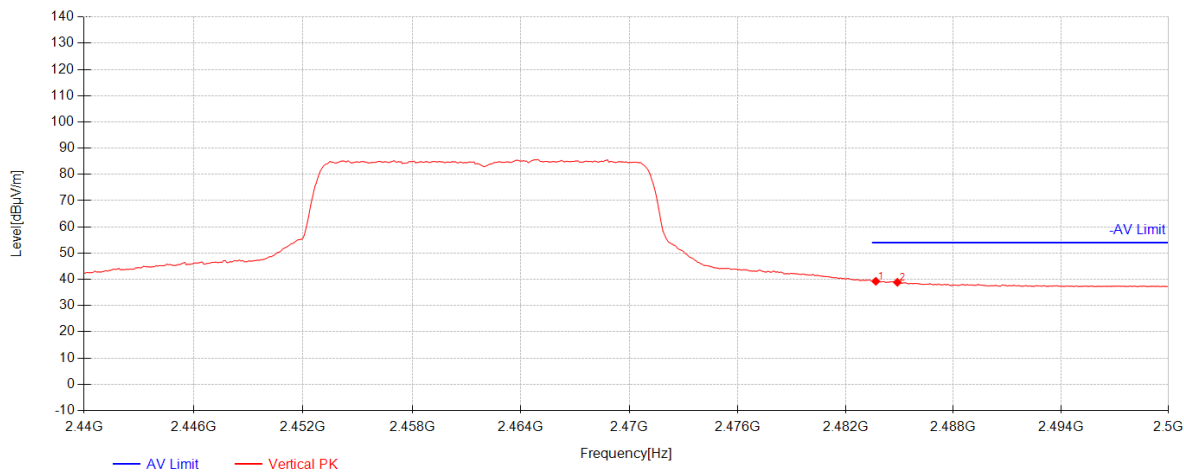


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	35.63	27.17	-23.54	39.25	54.00	14.75	Vertical
2	2484.88	35.25	27.17	-23.54	38.88	54.00	15.12	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 171 of 180

802.11n20_Channel 11

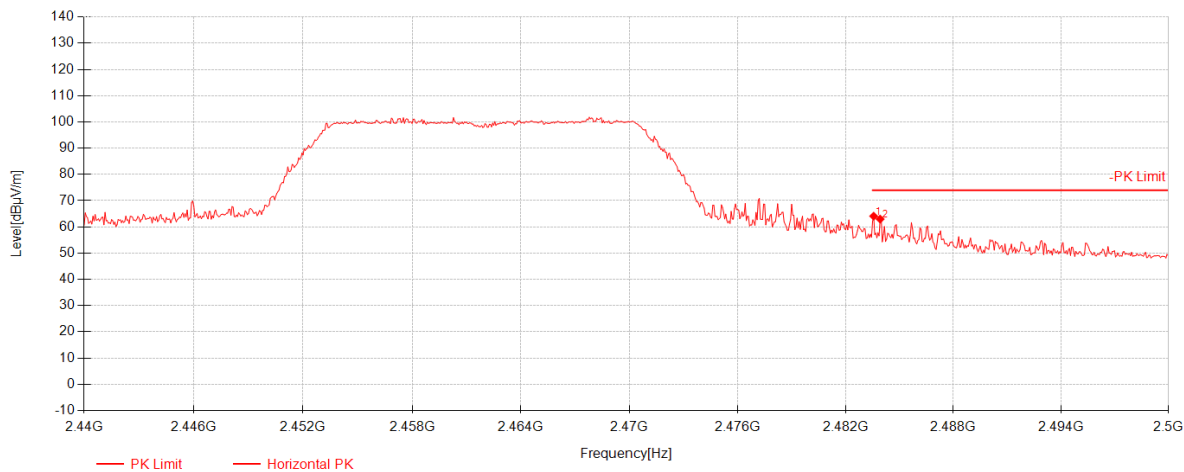


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.56	60.47	27.17	-23.54	64.09	74.00	9.91	Horizontal
2	2483.92	59.36	27.17	-23.54	62.98	74.00	11.02	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 172 of 180

802.11n20_Channel 11

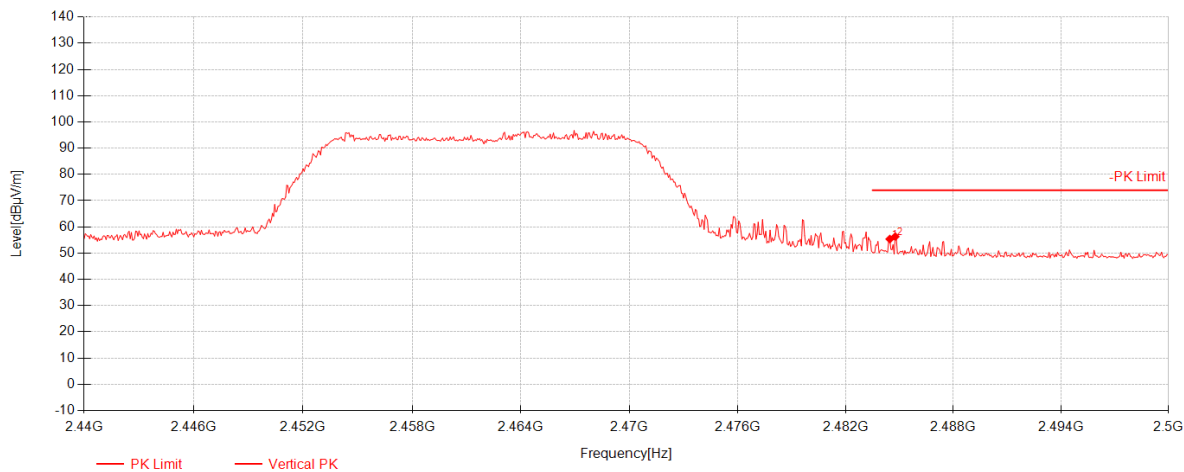


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.46	51.73	27.17	-23.54	55.35	74.00	18.65	Vertical
2	2484.76	52.67	27.17	-23.54	56.29	74.00	17.71	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 173 of 180

802.11ax20_Channel 01

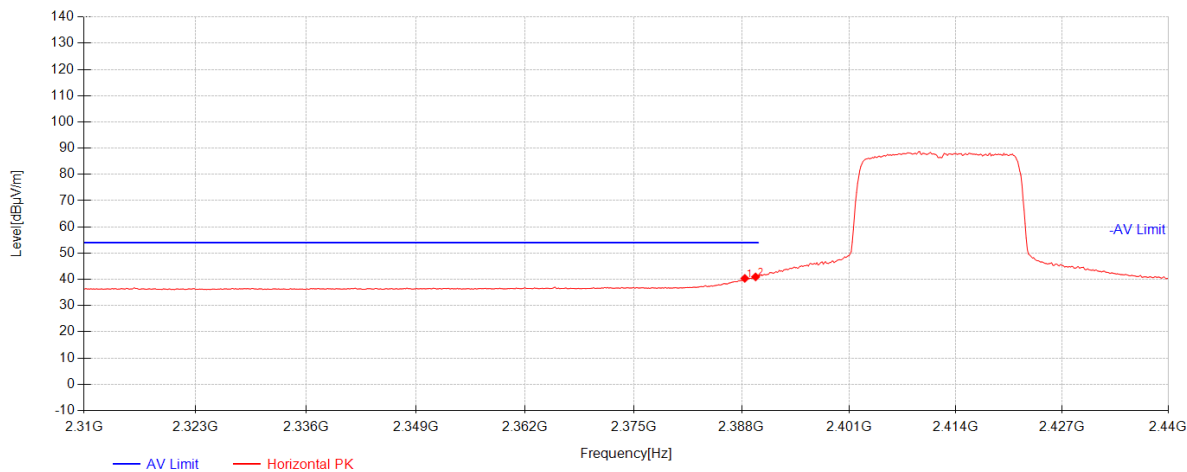


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.39	36.96	26.98	-23.57	40.37	54.00	13.63	Horizontal
2	2389.69	37.52	26.98	-23.57	40.93	54.00	13.07	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 174 of 180

802.11ax20_Channel 01

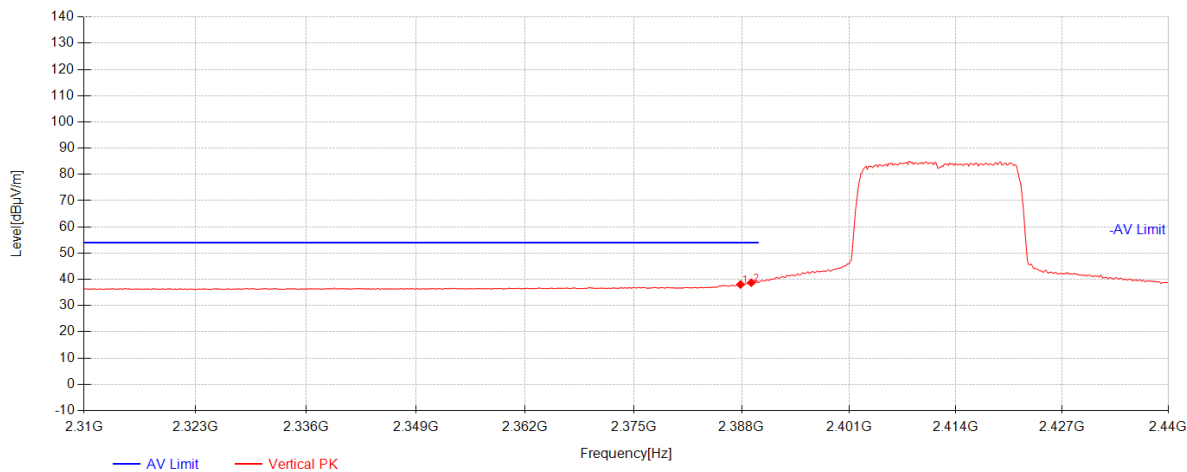


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.87	34.65	26.98	-23.57	38.05	54.00	15.95	Vertical
2	2389.17	35.30	26.98	-23.57	38.71	54.00	15.29	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 175 of 180

802.11ax20_Channel 01

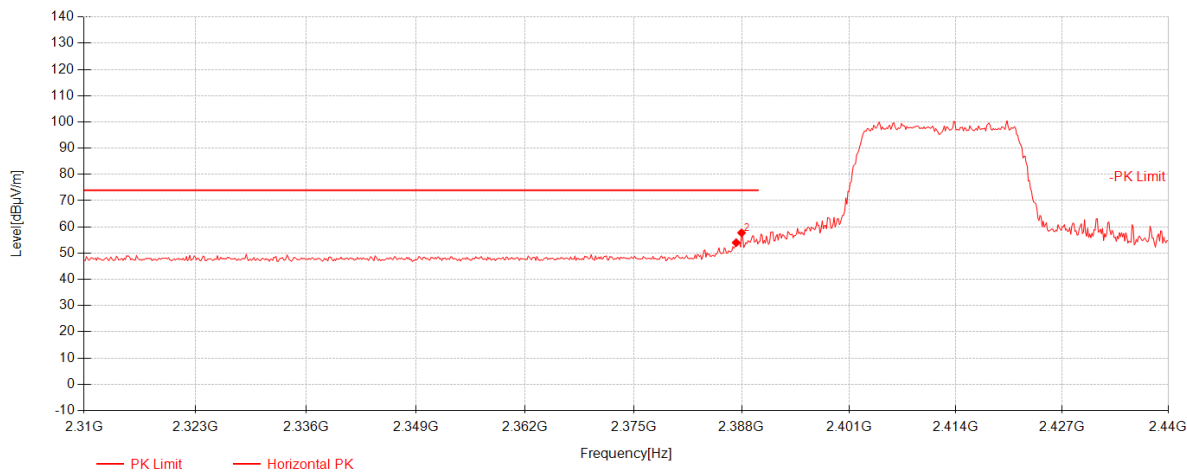


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.35	50.60	26.97	-23.57	54.00	74.00	20.00	Horizontal
2	2388	54.35	26.98	-23.57	57.75	74.00	16.25	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 176 of 180

802.11ax20_Channel 01

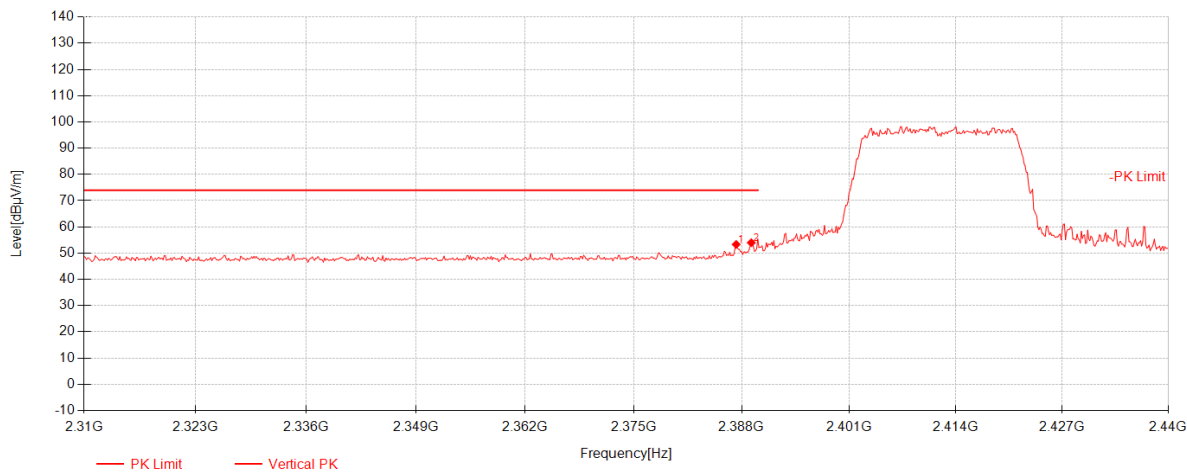


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.35	49.92	26.97	-23.57	53.32	74.00	20.68	Vertical
2	2389.17	50.55	26.98	-23.57	53.96	74.00	20.04	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 177 of 180

802.11ax20_Channel 11

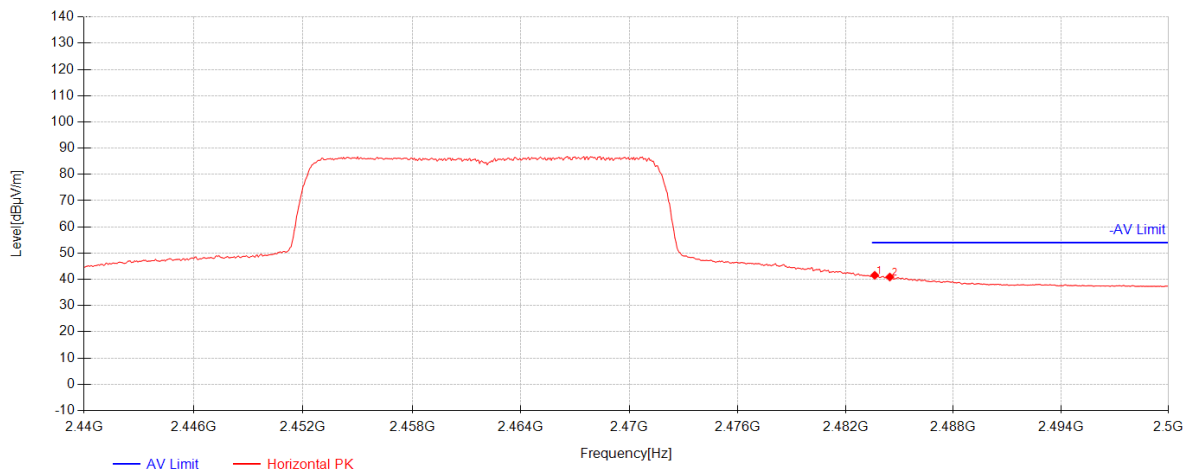


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.62	37.93	27.17	-23.54	41.55	54.00	12.45	Horizontal
2	2484.46	37.27	27.17	-23.54	40.89	54.00	13.11	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 178 of 180

802.11ax20_Channel 11

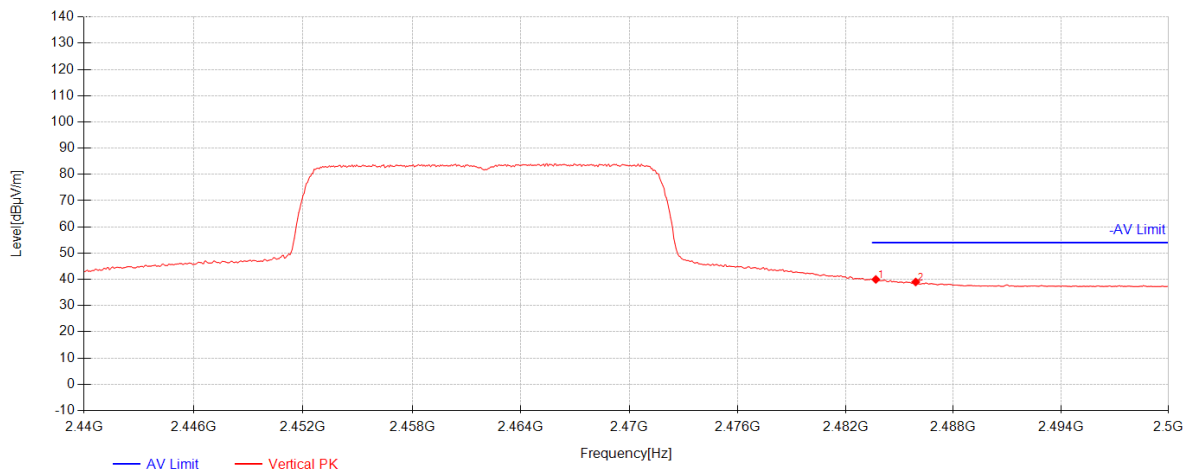


Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	36.34	27.17	-23.54	39.96	54.00	14.04	Vertical
2	2485.9	35.35	27.17	-23.54	38.98	54.00	15.02	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203
Rev.: 01
Page: 179 of 180

802.11ax20_Channel 11

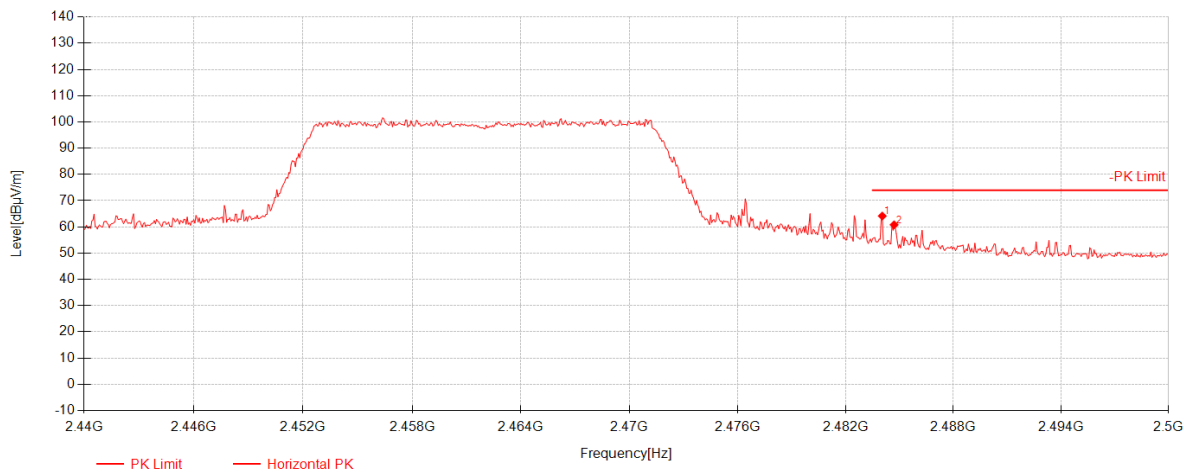

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.04	60.53	27.17	-23.54	64.15	74.00	9.85	Horizontal
2	2484.7	57.17	27.17	-23.54	60.79	74.00	13.21	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250200007203

Rev.: 01

Page: 180 of 180

802.11ax20_Channel 11

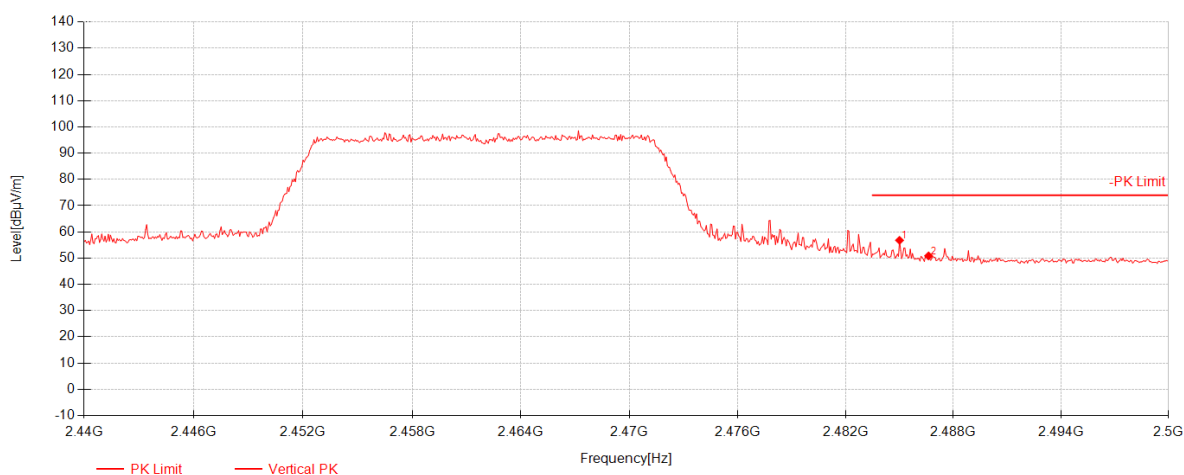

Final Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485	53.16	27.17	-23.54	56.79	74.00	17.21	Vertical
2	2486.62	47.23	27.17	-23.54	50.86	74.00	23.14	Vertical

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading(dBμV) + AF(dB/m) + Factor(dB):

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit(dBμV/m) – Level(dBμV/m)

- 2) Both peak and average measured complies with the limit line, so test result is "PASS"

---End of Report---