

Report No.: KSCR221000185705

Page: 1 of 31

TEST REPORT

Application No.: KSCR2210001857AT

FCC ID: 2AH25T6810 **IC**: 22621-T6810

Applicant: Shanghai Sunmi Technology Co.,Ltd.

Address of Applicant: Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China

Manufacturer: Shanghai Sunmi Technology Co.,Ltd.

Address of Manufacturer: Room 505, No.388, Song Hu Road, Yang Pu District, Shanghai, China

Equipment Under Test (EUT):

EUT Name: Smart POS system **HVIN:** T6810, T6810H

Model No.: T6810 Trade Mark: SUNMI

Standard(s): 47 CFR Part 15, Subpart C 15.225

RSS-210 issue 10 Amendment 1

RSS-Gen Issue 5, April 2018, Amendment 2

Date of Receipt: 2022-10-08

Date of Test: 2022-10-21 to 2022-11-17

Date of Issue: 2022-11-19

Test Result: Pass*

Eric Lin Laboratory Manager

Esia fin



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57355888 (186-512)57370818 www.sgsgroup.com.cn 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 (186-512)57355888 (186-512)57370818 sgs.china@sgs.com

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: KSCR221000185705

Page: 2 of 31

Revision Record				
Version	Description	Date	Remark	
00	Original	2022-11-19	/	

Authorized for issue by:		
	Ceril Lin	
	Eric Liu /Project Engineer	
	Eni fri	
	Eric Lin /Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR221000185705

Page: 3 of 31

2 Test Summary

Radio Spectrum Technical Requirement					
Item	FCC Requirement	IC Requirement	Method	Result	
Antenna Requirement	47 CFR Part 15, Subpart C 15.225	N/A	RSS-Gen Section 6.8	Customer Declaration	

Radio Spectrum Matter Part					
Item	FCC Requirement	IC Requirement	Method	Result	
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.225	RSS-210 Issue 9 August 2016 (Amendment)	ANSI C63.10 (2013) Section 6.2	Pass	
20dB Bandwidth	47 CFR Part 15, Subpart C 15.225	RSS-210 Issue 9 August 2016 (Amendment)	ANSI C63.10 (2013) Section 6.9	Pass	
Emission Mask	47 CFR Part 15, Subpart C 15.225	RSS-210 Issue 9 August 2016 (Amendment)	ANSI C63.10 (2013) Section 6.4	*Pass	
Frequency tolerance	47 CFR Part 15, Subpart C 15.225	RSS-210 Issue 9 August 2016 (Amendment)	ANSI C63.10 (2013) Section 6.8	Pass	
Radiated Emissions(9kHz- 30MHz)	47 CFR Part 15, Subpart C 15.225	RSS-210 Issue 9 August 2016 (Amendment)	ANSI C63.10 (2013) Section 6.4&6.5	Pass	
Radiated Emissions(30MHz- 1GHz)	47 CFR Part 15, Subpart C 15.225	RSS-210 Issue 9 August 2016 (Amendment)	ANSI C63.10 (2013) Section 6.4&6.5	Pass	
99% Bandwidth	-	RSS-210 Issue 9 August 2016 (Amendment)	RSS-Gen Section 6.7	Pass	

Remark *: The test level of the fundamental signal is below the limit of general spurious emission, so the test item doesn't be performed.

Note 1

The product is divided into high configuration version and basic configuration version.

SKU1: high configuration version, With code scanning probe, motor, front camera and MIC

SKU2: basic configuration version, Without code scanning probe, motor, front camera and MIC Except for the above differences, everything else is the same.

After Pre-scan test, only SKU1 was tested since their differences.

Note 2:

basic configuration version: T6810 high configuration version: T6810H



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 4 of 31

3 Contents

1 COVER PAGE				Page
3 CONTENTS 4 4 GENERAL INFORMATION 6 4.1 DETAILS OF E.U.T. 6 4.2 DESCRIPTION OF SUPPORT UNITS 6 4.3 MEASUREMENT UNCERTAINTY 7 4.4 TEST LOCATION 8 4.5 TEST FACILITY 8 4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1.1 ANTENNA REQUIREMENT 10 6.1.2 Conclusion 7 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 17 <t< th=""><th>1</th><th>COVE</th><th>R PAGE</th><th> 1</th></t<>	1	COVE	R PAGE	1
3 CONTENTS 4 4 GENERAL INFORMATION 6 4.1 DETAILS OF E.U.T. 6 4.2 DESCRIPTION OF SUPPORT UNITS 6 4.3 MEASUREMENT UNCERTAINTY 7 4.4 TEST LOCATION 8 4.5 TEST FACILITY 8 4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1.1 ANTENNA REQUIREMENT 10 6.1.2 Conclusion 7 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.3.3 EMISSION MASK 16 7.3.4 Measurement Procedure and Data 17 <t< th=""><th>2</th><th>TEST</th><th>SUMMARY</th><th> 3</th></t<>	2	TEST	SUMMARY	3
4 GENERAL INFORMATION 6 4.1 DETAILS OF E.U.T. 6 4.2 DESCRIPTION OF SUPPORT UNITS 6 4.3 MEASUREMENT UNCERTAINTY 7 4.4 TEST LOCATION 8 4.5 TEST FACILITY 8 4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement 10 6.1.2 Conclusion 16 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 200B BANDMOTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 16 7.4.2 Tes				
4.1 DETAILS OF E.U.T. 6 4.2 DESCRIPTION OF SUPPORT UNITS	3	CONT	ENIS	4
4.2 DESCRIPTION OF SUPPORT UNITS 6 4.3 MEASUREMENT UNCERTAINTY 7 4.4 TEST LOCATION 8 4.5 TEST FACILITY 8 4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 16 6.1.2 Conclusion 16 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 EU.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.2 Test Mode Description 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 17 7.3.3 Test Mode Description <	4	GENE	RAL INFORMATION	6
4.3 MEASUREMENT UNCERTAINTY 7 4.4 TEST LOCATION 8 4.5 TEST FACILITY 8 4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1.1 ANTENNA REQUIREMENT 10 6.1.2 Conclusion 10 6.1.1 Test Requirement: 10 6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.2 Test Mode Description 12 7.2.2 Test Mode Description 12 7.2.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17		4.1 Г	DETAILS OF E.U.T	6
4.4 TEST LOCATION 8 4.5 TEST FACILITY 8 4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 10 6.1.2 Conclusion 16 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20B BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE		4.2	DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST FACILITY 8 4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 10 6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 Frequency Tolerance				
4.6 DEVIATION FROM STANDARDS 8 4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement 10 6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 13 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE				
4.7 ABNORMALITIES FROM STANDARD CONDITIONS 8 5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 10 6.1.2 Conclusion 16 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 16 7.3.3 Test Setup Diagram				
5 EQUIPMENT LIST 9 6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 16 6.1.2 Conclusion 16 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 200B BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.1 F.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.1 F.U.T. Operation 16 7.3.2 Test Mode Description 16 <td></td> <td></td> <td></td> <td></td>				
6 RADIO SPECTRUM TECHNICAL REQUIREMENT 10 6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 10 6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Set Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.1 <td></td> <td>4.7 A</td> <td>ABNORMALITIES FROM STANDARD CONDITIONS</td> <td> 8</td>		4.7 A	ABNORMALITIES FROM STANDARD CONDITIONS	8
6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 10 6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.2 Test Mode Des	5	EQUI	PMENT LIST	9
6.1 ANTENNA REQUIREMENT 10 6.1.1 Test Requirement: 10 6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.2 Test Mode Des	_			
6.1.1 Test Requirement: 10 6.1.2 Conclusion 10 6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 REQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Da	6			
6.1.2 Conclusion 10 7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 <tr< td=""><td></td><td></td><td></td><td></td></tr<>				
7 RADIO SPECTRUM MATTER TEST RESULTS 11 7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 <td></td> <td></td> <td>·</td> <td></td>			·	
7.1 20DB BANDWIDTH 11 7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18 7.4.4 <td></td> <td>6.1.2</td> <td>Conclusion</td> <td>10</td>		6.1.2	Conclusion	10
7.1.1 E.U.T. Operation 11 7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150KHZ-30MHZ) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18	7	RADIO	O SPECTRUM MATTER TEST RESULTS	11
7.1.2 Test Mode Description 11 7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18		7.1 2	20dB Bandwidth	11
7.1.3 Test Setup Diagram 11 7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18		7.1.1		
7.1.4 Measurement Procedure and Data 11 7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz) 12 7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18		7.1.2	Test Mode Description	11
7.2 CONDUCTED EMISSIONS AT MAINS TERMINALS (150kHz-30MHz). 12 7.2.1 E.U.T. Operation. 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data. 13 7.3 EMISSION MASK. 16 7.3.1 E.U.T. Operation. 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18			, •	
7.2.1 E.U.T. Operation 12 7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18				
7.2.2 Test Mode Description 12 7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18				
7.2.3 Test Setup Diagram 12 7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18				
7.2.4 Measurement Procedure and Data 13 7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18 7.4.4 Measurement Procedure and Data 18			·	
7.3 EMISSION MASK 16 7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18				
7.3.1 E.U.T. Operation 16 7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18				
7.3.2 Test Mode Description 16 7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18				
7.3.3 Test Setup Diagram 17 7.3.4 Measurement Procedure and Data 17 7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18			·	
7.3.4 Measurement Procedure and Data177.4 FREQUENCY TOLERANCE187.4.1 E.U.T. Operation187.4.2 Test Mode Description187.4.3 Test Setup Diagram187.4.4 Measurement Procedure and Data18			·	
7.4 FREQUENCY TOLERANCE 18 7.4.1 E.U.T. Operation 18 7.4.2 Test Mode Description 18 7.4.3 Test Setup Diagram 18 7.4.4 Measurement Procedure and Data 18				
7.4.1E.U.T. Operation187.4.2Test Mode Description187.4.3Test Setup Diagram187.4.4Measurement Procedure and Data18				
7.4.2 Test Mode Description				
7.4.3 Test Setup Diagram			•	
7.4.4 Measurement Procedure and Data18			·	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 5 of 31

7.5.	1 E.U.T. Operation	19				
7.5.	2 Test Mode Description	19				
7.5.	3 Test Setup Diagram	19				
7.5.		20				
7.6	RADIATED EMISSIONS (9kHz-30MHz)	21				
7.6.						
7.6.						
7.6.	3 Test Setup Diagram	22				
7.6.						
7.7	99% BANDWIDTH					
7.7.	1 E.U.T. Operation	23				
7.7.		23				
7.7.	3 Test Setup Diagram	23				
7.7.		23				
8 TES	T SETUP PHOTO	24				
9 EU1	CONSTRUCTIONAL DETAILS (EUT PHOTOS)	24				
10 APF	APPENDIX25					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 6 of 31

General Information

Details of E.U.T.

Power supply:	DC 5V 1A; DC 5V 2A
	Adapter 1:
	Model: TPA-46B050100UU
	Input: 100-240V~ 50/60Hz 0.2A
	Output: 5.0V 1.0A
	Adapter 2:
Adapter information:	Model: TPA-23A050200UU01
Adapter information:	Input: 100-240V~ 50/60Hz 0.3A
	Output: 5.0V 2.0A
	Adapter 3:
	Model No.: UC11US
	PRI: 100-240V~50/60Hz 0.2A
	SEC: 5.0V 1.0A 5.0W
	Model: TMPA 1ICP6/59/63
Battery information:	Nominal Voltage: 3.8V
Battery information.	Limited Charge Voltage: 4.35V
	Rated Capacity: 2900mAh
Operation Frequency:	13.56MHz
Channel Number:	1
Modulation Type:	ASK
Antenna Type:	Loop Antenna

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.	
The EUT has been tested as an independent unit.				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 7 of 31

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 ⁻⁸
2	Occupied Bandwidth	3%
3	RF Radiated Power	5.2dB (Below 1GHz)
3	Kr Kadialed Fowei	5.9dB (Above 1GHz)
		4.2dB (Below 30MHz)
4	Redicted Sourious Emission Test	4.5dB (30MHz-1GHz)
4	Radiated Spurious Emission Test	5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
5	Temperature Test	1°C
6	Humidity Test	3%
7	Supply Voltages	1.5%
8	Time 3%	

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 8 of 31

4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

- 1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or emails CND poccheck@dss.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 9 of 31

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date		
Condu	Conducted Emission at Mains Terminals (150kHz-30MHz)							
1	EMI Test Receive	R&S	ESCI	KS301101	01/22/2022	01/21/2023		
2	LISN	R&S	ENV216	KS301197	01/22/2022	01/21/2023		
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/22/2022	01/21/2023		
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/22/2022	01/21/2023		
5	CE test Cable	Thermax	/	CZ301102	11/14/2021	11/13/2022		
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R		
RF Ra	diated Test							
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/22/2022	08/21/2023		
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	04/01/2022	03/31/2023		
3	Signal Generator	Agilent	E8257C	KS301066	08/22/2022	08/21/2023		
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	04/13/2021	04/12/2023		
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2021	06/28/2023		
6	Bilog Antenna	SCHWARZBECK	VULB9160	CZ301016	04/13/2021	04/12/2024		
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	04/02/2022	04/01/2024		
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	02/22/2021	02/21/2023		
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	03/17/2022	03/16/2023		
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/22/2022	01/21/2023		
11	Amplifier(18~40GHz)	COM-POWER	PAM-840A	KUS1710E001	01/22/2022	01/21/2023		
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	11/13/2022	11/12/2023		
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	01/04/2022	31/03/2023		
14	Software	Faratronic	EZ_EMC-v 3A1	/	N/A	N/A		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 10 of 31

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is Loop Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

Antenna location: Refer to Internal photos



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Member of the SGS Group (SGS SA)



Report No.: KSCR221000185705

Page: 11 of 31

7 Radio Spectrum Matter Test Results

7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
Test Method: ANSI C63.10 (2013) Section 6.9

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 55.9 % RH Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode with 13.56MHz modulation

7.1.3 Test Setup Diagram

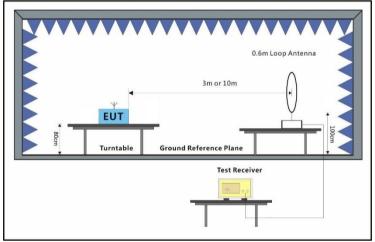

7.1.4 Measurement Procedure and Data

The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 12 of 31

7.2 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Fragues en ranga (MIIII)	Limit (dBuV)		
Frequency range (MHz)	Quasi-peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

^{*} Decreases with the logarithm of the frequency.

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22.3 °C Humidity: 52.6 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode with 13.56MHz modulation

7.2.3 Test Setup Diagram

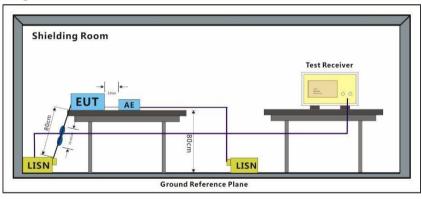



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 13 of 31

7.2.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: Level=Read Level+ Cable Loss+ LISN Factor

Remark 2: We have evaluated different adapters modes. The Adapter 1 mode is the worst, and only the Adapter 1 mode is tested finally.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CN Doccheck@gs.com.


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 14 of 31

Test Mode: 06; Line: Live line

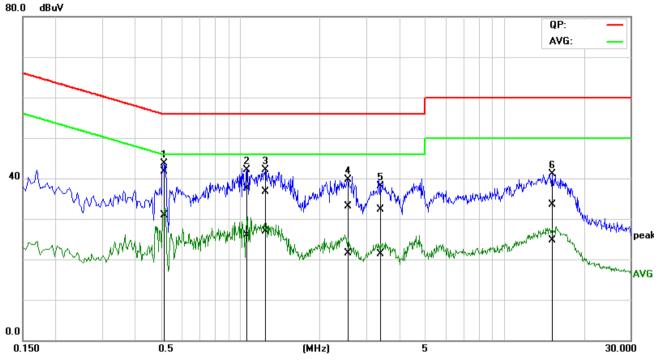

No.	Frequency	QuasiPeak	Average	Correction	QuasiPeak	Average	QuasiPeak	Average	QuasiPeak	Average	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.5118	22.07	11.29	19.56	41.63	30.85	56.00	46.00	-14.37	-15.15	Pass
2	1.0674	17.88	6.39	19.60	37.48	25.99	56.00	46.00	-18.52	-20.01	Pass
3	1.2350	17.07	7.39	19.61	36.68	27.00	56.00	46.00	-19.32	-19.00	Pass
4	2.5583	13.35	1.87	19.68	33.03	21.55	56.00	46.00	-22.97	-24.45	Pass
5	3.3829	12.50	1.49	19.73	32.23	21.22	56.00	46.00	-23.77	-24.78	Pass
6	15.1612	13.25	4.54	20.21	33.46	24.75	60.00	50.00	-26.54	-25.25	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 15 of 31

Test Mode: 06; Line: Neutral Line

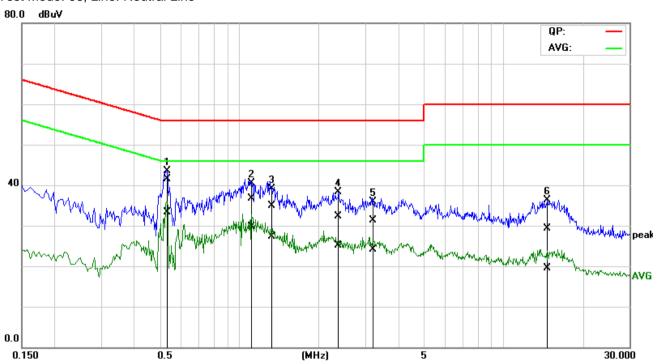

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.5296	21.96	13.65	19.56	41.52	33.21	56.00	46.00	-14.48	-12.79	Pass
2	1.1219	17.03	10.14	19.61	36.64	29.75	56.00	46.00	-19.36	-16.25	Pass
3	1.3277	15.32	7.66	19.61	34.93	27.27	56.00	46.00	-21.07	-18.73	Pass
4	2.3867	12.72	5.46	19.67	32.39	25.13	56.00	46.00	-23.61	-20.87	Pass
5	3.2397	11.56	4.42	19.72	31.28	24.14	56.00	46.00	-24.72	-21.86	Pass
6	14.6392	9.09	-0.68	20.19	29.28	19.51	60.00	50.00	-30.72	-30.49	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 16 of 31

7.3 Emission Mask

Test Requirement 47 CFR Part 15, Subpart C 15.225(a)&(b)&(C)

Test Method: ANSI C63.10 (2013) Section 6.4

Limit:

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Below 30MHz

The limit at 30m test distance is below:

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

where

is the calculation of field strength at the limit distance, expressed in dBµV/m FS_{limit}

is the measured field strength, expressed in dBµV/m FS_{max} is the distance of the measurement point from the EUT d_{measure} is the reference distance or the distance of the $\lambda/2\pi$ point d_{limit}

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 84dBuV/m at 30 meters.

7.3.1 E.U.T. Operation

Operating Environment:

22.9 °C Humidity: 55.9 % RH Atmospheric Pressure: 1010 mbar Temperature:

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode with 13.56MHz modulation



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@sas.com.

No.10, Weive Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888

邮编 215300

中国・江苏・昆山市留学生创业园伟业路10号

Member of the SGS Group (SGS SA)


t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR221000185705

Page: 17 of 31

7.3.3 Test Setup Diagram

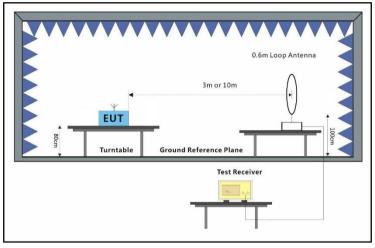

7.3.4 Measurement Procedure and Data

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or emails: CNDoccheck@oss.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 18 of 31

7.4 Frequency tolerance

Test Requirement 47 CFR Part 15, Subpart C 15.225(e)
Test Method: ANSI C63.10 (2013) Section 6.8

Limit: ± 0.01

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 55.9 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan Final test	/ Mode Code	Description
Final test	06	TX mode with 13.56MHz modulation

7.4.3 Test Setup Diagram

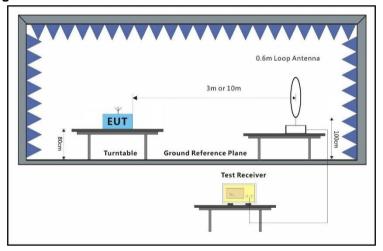

7.4.4 Measurement Procedure and Data

The EUT was placed in an environmental test chamber and powered such that control element received normal voltage and the transmitter provided maximum RF output.

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 19 of 31

7.5 Radiated Emissions (30MHz-1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.225(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)		
30-88	100	3		
88-216	150	3		
216-960	200	3		
Above 960	500	3		

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 55.9 % RH Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode with 13.56MHz modulation

7.5.3 Test Setup Diagram

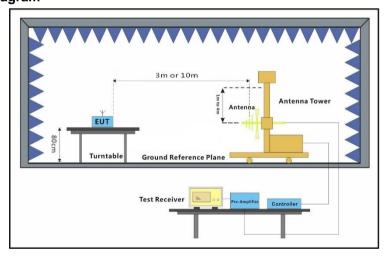



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755) 8307 1443, **Certificate, please contact us at telephone: (86-755)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 20 of 31

7.5.4 Measurement Procedure and Data

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CN Doccheck@gs.com.

or email: CN_Doccheck@sgs.com
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57355888

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 21 of 31

7.6 Radiated Emissions (9kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.225(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5

Limit:

Frequency(MHz)	Field strength	Limit	Detector	Measurement Distance
Frequency(MHZ)	(microvolts/meter)	(dBuV/m)	Detector	(meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30

Below 30MHz

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than $\lambda/2\pi$ and the limit distance is greater than $\lambda/2\pi$, the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the $\lambda/2\pi$ distance, and at a 20 dB/decade of distance rate beyond $\lambda/2\pi$. This shall be accomplished using Equation (2):

$$FS_{(10m)} = FS_{(30/300m)} + 40log\{d_{(near field)}/d_{(10m)}\} + 20log\{d_{(30/300m)}/d_{(near field)}\}$$
(2)

If the single point measured is at a distance greater than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (3):

$$FS_{(10m)} = FS_{(30/300m)} + 20log\{d_{(30/300m)}/d_{(10m)}\}$$
(3)

If both the single point and the limit distance are equal to or closer to the EUT than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (4):

$$FS_{(10m)} = FS_{(30/300m)} + 40log\{d_{(30/300m)}/d_{(10m)}\}$$
(4)

Remark:

 $d_{near field} = 47.77 / f_{MHz}$

where f_{MHz} is the frequency of the emission being measured in MHz.

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or emails CND poccheck@dss.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 22 of 31

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

where

 FS_{limit} is the calculation of field strength at the limit distance, expressed in dB μ V/m

FS_{max} is the measured field strength, expressed in dBμV/m d_{measure} is the distance of the measurement point from the EUT is the reference distance or the distance of the $\lambda/2\pi$ point

r

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 55.9 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode with 13.56MHz modulation

7.6.3 Test Setup Diagram

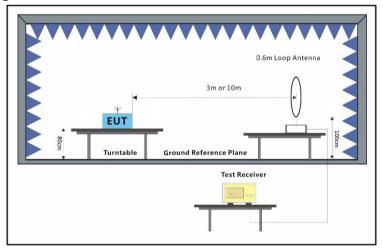

7.6.4 Measurement Procedure and Data

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.

Please Refer to Appendix for Details

中国・江苏・昆山市留学生创业园伟业路10号



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CN Doccheck@gs.com.

邮编 215300

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR221000185705

Page: 23 of 31

7.7 99% Bandwidth

Test Requirement RSS-Gen Section 6.7

Test Method: RSS-Gen March 2019 Amendment 1 Section 6.7

Limit:

Operate frequency	Limit
70MHz to 900MHz	less than or equal to 0.25% of the centre frequency
Above 900MHz	less than or equal to 0.5% of the centre frequency.

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 55.9 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode with 13.56MHz modulation

7.7.3 Test Setup Diagram

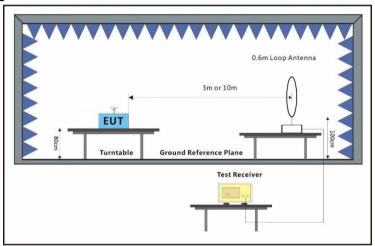

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR221000185705

Page: 24 of 31

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2210001857AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2210001857AT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705


Page: 25 of 31

10 Appendix

20dB Bandwidth

20dB bandwidth (kHz)	F _L (MHz)	Fн (MHz)	Limit(MHz)	Result
0.5245	13.5597	13.5602	13.110 – 14.010	Pass

Test plot as follows:

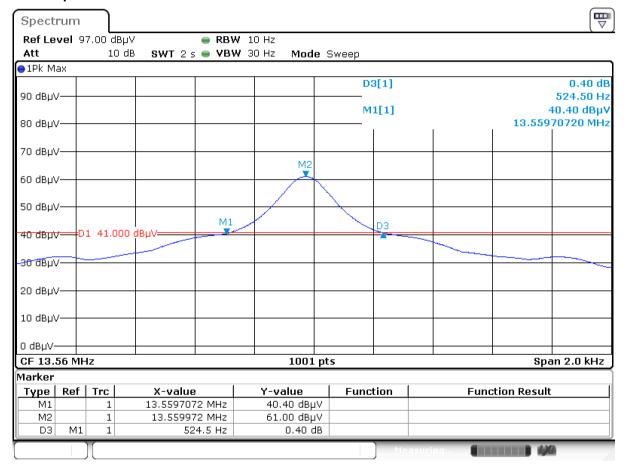



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com

or email: CN.Doccheck@sgs.com No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 (186-512)5




Report No.: KSCR221000185705

Page: 26 of 31

99% Bandwidth

99% bandwidth (kHz)	99% bandwidth (kHz) F _L (MHz)		Limit(MHz)	Result	
0.7273	13.5596	13.5603	13.110 – 14.010	Pass	

Test plot as follows:

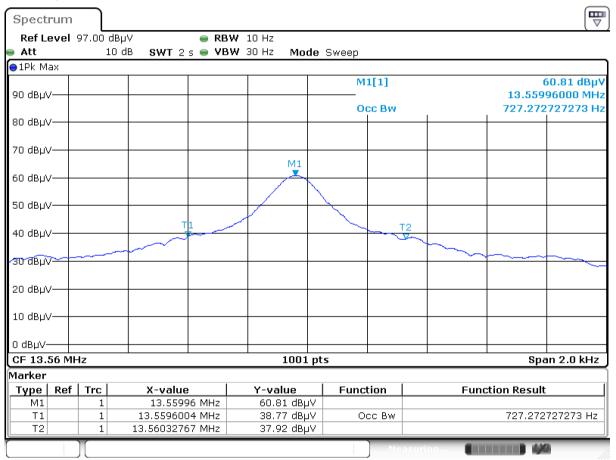



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 27 of 31

Frequency tolerance

Nominal Operation Frequency: 13.56MHz

Test Conditions		Test Result	Deviation	Limit	Danult
Temp (°C)	Volt (V DC)	(MHz)	(kHz)	(kHz)	Result
Tnom (-20)	Vnom (3.8)	13.55995	-0.05		Pass
Tnom (-10)	Vnom (3.8)	13.55996	-0.04		Pass
Tnom (0)	Vnom (3.8)	13.56003	0.03		Pass
Tnom (10)	Vnom (3.8)	13.56004	0.04		Pass
Tnom (20)	Vnom (3.8)	13.56006	0.06	±0.01%	Pass
Tnom (30)	Vnom (3.8)	13.56007	0.07	(1.3560kHz)	Pass
Tnom (40)	Vnom (3.8)	13.56013	0.13		Pass
Tnom (50)	Vnom (3.8)	13.56017	0.17		Pass
Tnom (20)	Vmin (3.23)	13.56006	0.06		Pass
	Vmax (4.37)	13.56008	0.08		Pass

Note: Deviation (kHz) = (Test Result-13.56MHz)*1000



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300




Report No.: KSCR221000185705

Page: 28 of 31

Radiated Emissions(9kHz-30MHz)

Polarity: Horizontal

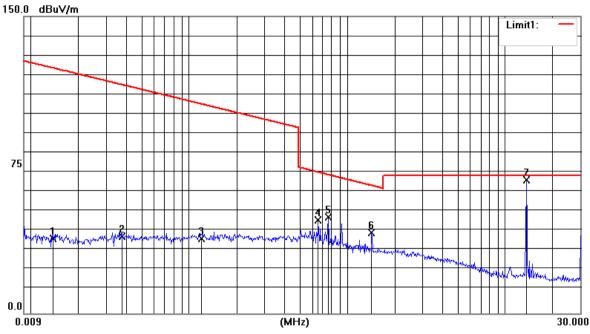

Item	Freq.	Read Level	Correct Factor	Result Level@3m	Result Level@SPEC	Limit Line@SPEC	Over Limit	Detector	Polarity
(Mark)	(MHz)	(dBµV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	0.0137	21.66	15.96	37.62	-42.38	43.96	-86.34	QP	Coaxial
2	0.0374	23.20	15.70	38.90	-41.10	35.49	-76.59	QP	Coaxial
3	0.1188	23.04	14.80	37.84	-42.16	25.75	-67.91	QP	Coaxial
4	0.6542	32.80	14.43	47.23	7.23	31.30	-24.07	QP	Coaxial
5	0.755	34.03	14.43	48.46	8.46	30.06	-21.60	QP	Coaxial
6	1.4255	26.40	14.40	40.80	0.80	24.55	-23.75	QP	Coaxial
7	13.6227	53.51	13.95	67.46	27.46	29.50	-2.04	Peak	Coaxial



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 29 of 31



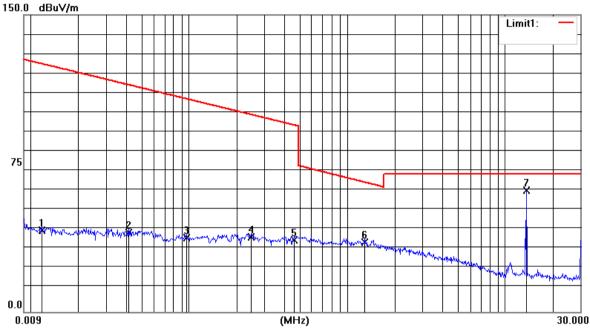

Item	Freq.	Read Level	Correct Factor	Result Level@3m	Result Level@SPEC	Limit Line@SPEC	Over Limit	Detector	Polarity
(Mark)	(MHz)	(dBµV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	0.0117	24.99	15.98	40.97	-39.03	45.29	-84.32	QP	Coplanar
2	0.0417	24.47	15.65	40.12	-39.88	34.58	-74.46	QP	Coplanar
3	0.0956	22.3	15.05	37.35	-42.65	27.58	-70.23	QP	Coplanar
4	0.248	23.1	14.45	37.55	-42.45	19.54	-61.99	QP	Coplanar
5	0.4637	21.93	14.44	36.37	-43.63	14.27	-57.9	QP	Coplanar
6	1.289	20.82	14.41	35.23	-4.77	25.42	-30.19	QP	Coplanar
7	13.6227	47.38	13.95	61.33	21.33	29.5	-8.17	Peak	Coplanar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300




Report No.: KSCR221000185705

Page: 30 of 31

Below 1GHz

Polarity: Horizontal

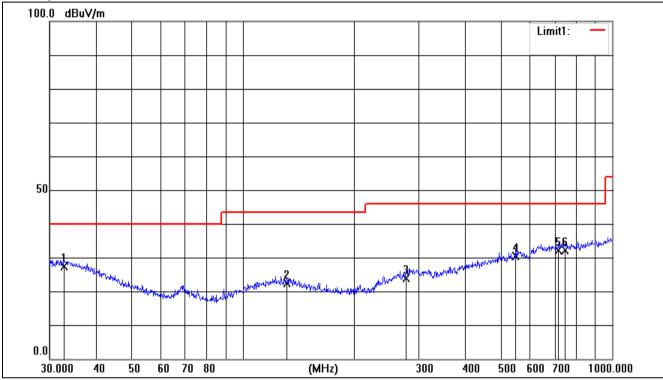

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Polarity
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	32.8637	2.40	25.04	27.44	40.00	-12.56	QP	Horizontal
2	131.7576	3.16	19.30	22.46	43.50	-21.04	QP	Horizontal
3	277.0935	3.72	20.28	24.00	46.00	-22.00	QP	Horizontal
4	547.0977	3.23	27.14	30.37	46.00	-15.63	QP	Horizontal
5	716.6820	29.73	2.44	32.17	46.00	-13.83	QP	Horizontal
6	744.8660	29.85	2.37	32.22	46.00	-13.78	QP	Horizontal



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR221000185705

Page: 31 of 31

Polarity: Vertical

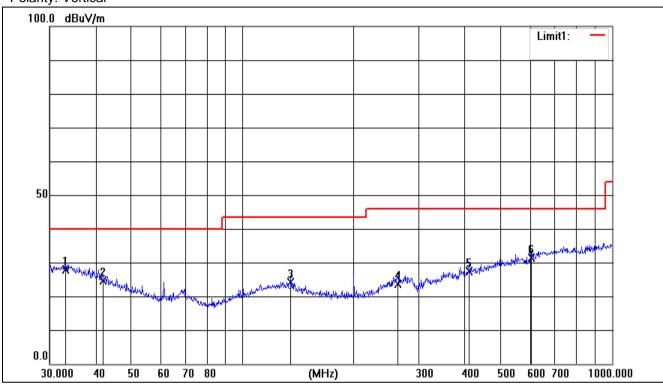

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark	Polarity
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		
1	33.0950	2.81	25.02	27.83	40.00	-12.17	QP	Vertical
2	41.8596	3.37	21.38	24.75	40.00	-15.25	QP	Vertical
3	135.0320	5.12	19.10	24.22	43.50	-19.28	QP	Vertical
4	262.8955	2.61	21.03	23.64	46.00	-22.36	QP	Vertical
5	410.3824	3.59	23.80	27.39	46.00	-18.61	QP	Vertical
6	605.6592	4.19	27.07	31.26	46.00	-14.74	QP	Vertical

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@css.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300