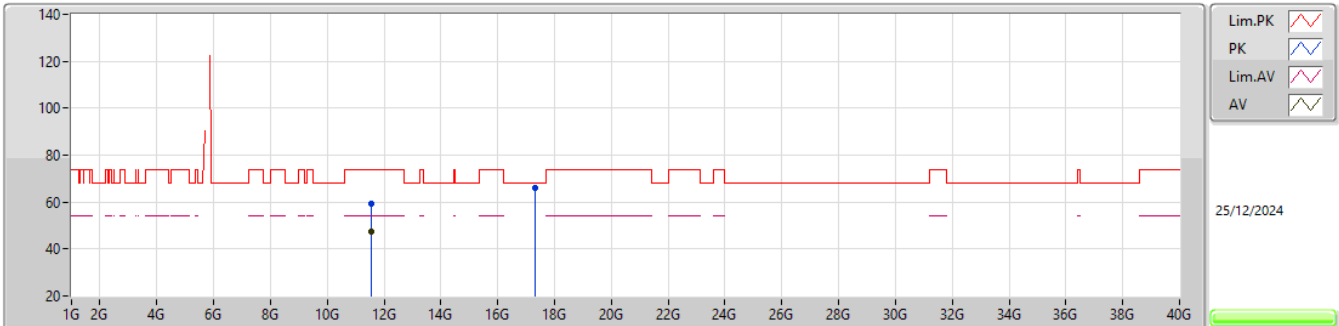


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

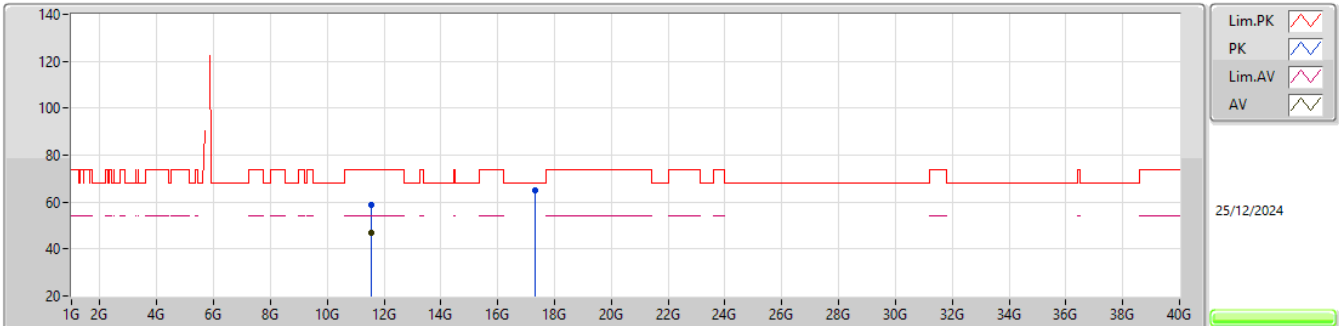
5775MHz_TX

EUT_Y_4TX
Setting 66
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.54868G	59.24	74.00	-14.76	39.10	3	Vertical	258	1.80	-	39.10	11.79	30.75			
AV	11.55618G	47.28	54.00	-6.72	27.12	3	Vertical	258	1.80	-	39.12	11.80	30.76			
PK	17.3322G	66.12	68.20	-2.08	42.97	3	Vertical	218	1.80	-	42.89	12.50	32.24			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

5775MHz_TX

EUT_Y_4TX
Setting 66
02-D-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55868G	58.90	74.00	-15.10	38.73	3	Horizontal	350	1.80	-	39.13	11.80	30.76			
AV	11.54638G	47.05	54.00	-6.95	26.92	3	Horizontal	350	1.80	-	39.09	11.79	30.75			
PK	17.33192G	64.97	68.20	-3.23	41.82	3	Horizontal	33	2.41	-	42.89	12.50	32.24			



Test Mode: Mode 13

Summary

Mode	Result	Type	Freq	Level	Limit	Margin	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(m)		(°)	(m)	
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX	Pass	AV	5.15G	53.79	54.00	-0.21	3	Vertical	360	1.14	-

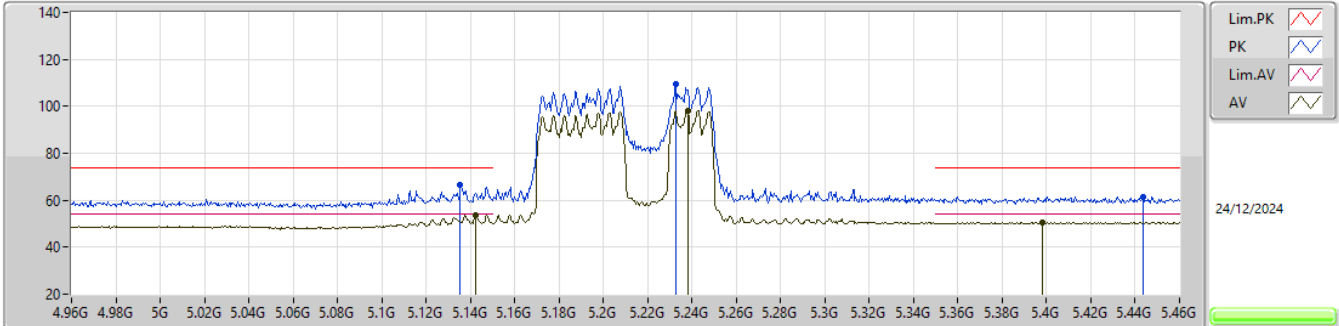
Result

Mode	Result	Type	Freq	Level	Limit	Margin	Dist	Condition	Azimuth	Height	Comments
			(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(m)		(°)	(m)	
802.11be EHT80_Nss1.(MCS0).RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	PK	5.1355G	66.72	74.00	-7.28	3	Vertical	24	1.78	-
5210MHz	Pass	AV	5.1425G	53.61	54.00	-0.39	3	Vertical	24	1.78	-
5210MHz	Pass	PK	5.2325G	109.42	Inf	-Inf	3	Vertical	24	1.78	-
5210MHz	Pass	AV	5.238G	98.27	Inf	-Inf	3	Vertical	24	1.78	-
5210MHz	Pass	PK	5.4435G	61.63	74.00	-12.37	3	Vertical	24	1.78	-
5210MHz	Pass	AV	5.398G	50.61	54.00	-3.39	3	Vertical	24	1.78	-
5210MHz	Pass	PK	5.136G	64.00	74.00	-10.00	3	Horizontal	355	2.71	-
5210MHz	Pass	AV	5.1475G	51.49	54.00	-2.51	3	Horizontal	355	2.71	-
5210MHz	Pass	PK	5.233G	108.20	Inf	-Inf	3	Horizontal	355	2.71	-
5210MHz	Pass	AV	5.2025G	97.04	Inf	-Inf	3	Horizontal	355	2.71	-
5210MHz	Pass	PK	5.385G	61.99	74.00	-12.01	3	Horizontal	355	2.71	-
5210MHz	Pass	AV	5.414G	50.69	54.00	-3.31	3	Horizontal	355	2.71	-
5210MHz	Pass	PK	10.41725G	55.74	68.20	-12.46	3	Vertical	124	1.43	-
5210MHz	Pass	PK	15.61535G	54.59	74.00	-19.41	3	Vertical	210	1.49	-
5210MHz	Pass	AV	15.61065G	43.83	54.00	-10.17	3	Vertical	210	1.49	-
5210MHz	Pass	PK	10.4405G	56.24	68.20	-11.96	3	Horizontal	25	2.17	-
5210MHz	Pass	PK	15.6171G	54.59	74.00	-19.41	3	Horizontal	205	1.37	-
5210MHz	Pass	AV	15.6081G	43.81	54.00	-10.19	3	Horizontal	205	1.37	-
802.11be EHT80_Nss1.(MCS0).RU484+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	PK	5.104G	60.02	74.00	-13.98	3	Vertical	348	2.53	-
5290MHz	Pass	AV	5.1485G	49.45	54.00	-4.55	3	Vertical	348	2.53	-
5290MHz	Pass	PK	5.319G	110.21	Inf	-Inf	3	Vertical	348	2.53	-
5290MHz	Pass	AV	5.319G	99.74	Inf	-Inf	3	Vertical	348	2.53	-
5290MHz	Pass	PK	5.359G	70.12	74.00	-3.88	3	Vertical	348	2.53	-
5290MHz	Pass	AV	5.3585G	53.53	54.00	-0.47	3	Vertical	348	2.53	-
5290MHz	Pass	PK	5.482G	61.94	68.20	-6.26	3	Vertical	348	2.53	-
5290MHz	Pass	PK	5.109G	60.37	74.00	-13.63	3	Horizontal	358	2.52	-
5290MHz	Pass	AV	5.131G	49.28	54.00	-4.72	3	Horizontal	358	2.52	-
5290MHz	Pass	PK	5.2975G	110.26	Inf	-Inf	3	Horizontal	358	2.52	-
5290MHz	Pass	AV	5.3025G	100.32	Inf	-Inf	3	Horizontal	358	2.52	-
5290MHz	Pass	PK	5.3525G	65.81	74.00	-8.19	3	Horizontal	358	2.52	-
5290MHz	Pass	AV	5.359G	51.72	54.00	-2.28	3	Horizontal	358	2.52	-
5290MHz	Pass	PK	5.504G	62.19	68.20	-6.01	3	Horizontal	358	2.52	-
5290MHz	Pass	PK	10.5951G	55.48	68.20	-12.72	3	Vertical	18	1.24	-
5290MHz	Pass	PK	15.8635G	54.26	74.00	-19.74	3	Vertical	201	1.18	-
5290MHz	Pass	AV	15.8852G	43.35	54.00	-10.65	3	Vertical	201	1.18	-
5290MHz	Pass	PK	10.5568G	55.37	68.20	-12.83	3	Horizontal	240	2.43	-
5290MHz	Pass	PK	15.85255G	54.16	74.00	-19.84	3	Horizontal	45	2.73	-
5290MHz	Pass	AV	15.88865G	43.23	54.00	-10.77	3	Horizontal	45	2.73	-
802.11be EHT160_Nss1.(MCS0).RU996+RU484+RU242 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	PK	5.1388G	63.90	74.00	-10.10	3	Vertical	348	2.71	-
5250MHz	Pass	AV	5.1444G	53.73	54.00	-0.27	3	Vertical	348	2.71	-
5250MHz	Pass	PK	5.2788G	106.12	Inf	-Inf	3	Vertical	348	2.71	-
5250MHz	Pass	AV	5.2788G	95.95	Inf	-Inf	3	Vertical	348	2.71	-
5250MHz	Pass	PK	5.358G	62.38	74.00	-11.62	3	Vertical	348	2.71	-
5250MHz	Pass	AV	5.3636G	51.70	54.00	-2.30	3	Vertical	348	2.71	-
5250MHz	Pass	PK	5.482G	62.64	68.20	-5.56	3	Vertical	348	2.71	-
5250MHz	Pass	PK	5.138G	61.48	74.00	-12.52	3	Horizontal	357	2.51	-
5250MHz	Pass	AV	5.1476G	52.71	54.00	-1.29	3	Horizontal	357	2.51	-
5250MHz	Pass	PK	5.278G	106.10	Inf	-Inf	3	Horizontal	357	2.51	-
5250MHz	Pass	AV	5.3076G	96.03	Inf	-Inf	3	Horizontal	357	2.51	-
5250MHz	Pass	PK	5.3532G	62.69	74.00	-11.31	3	Horizontal	357	2.51	-
5250MHz	Pass	AV	5.3532G	52.10	54.00	-1.90	3	Horizontal	357	2.51	-
5250MHz	Pass	PK	5.6204G	62.15	68.20	-6.05	3	Horizontal	357	2.51	-
5250MHz	Pass	PK	10.47655G	55.95	68.20	-12.25	3	Vertical	357	1.53	-
5250MHz	Pass	PK	15.72875G	53.32	74.00	-20.68	3	Vertical	50	2.99	-
5250MHz	Pass	AV	15.7732G	42.56	54.00	-11.44	3	Vertical	50	2.99	-
5250MHz	Pass	PK	10.4753G	55.69	68.20	-12.51	3	Horizontal	6	1.42	-
5250MHz	Pass	PK	15.72675G	53.34	74.00	-20.66	3	Horizontal	279	1.70	-
5250MHz	Pass	AV	15.7264G	42.66	54.00	-11.34	3	Horizontal	279	1.70	-

802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	PK	5.1452G	63.93	74.00	-10.07	3	Vertical	360	1.14	-
5250MHz	Pass	AV	5.15G	53.79	54.00	-0.21	3	Vertical	360	1.14	-
5250MHz	Pass	PK	5.2756G	106.52	Inf	-Inf	3	Vertical	360	1.14	-
5250MHz	Pass	AV	5.2748G	97.05	Inf	-Inf	3	Vertical	360	1.14	-
5250MHz	Pass	PK	5.3748G	62.35	74.00	-11.65	3	Vertical	360	1.14	-
5250MHz	Pass	AV	5.35G	51.64	54.00	-2.36	3	Vertical	360	1.14	-
5250MHz	Pass	PK	5.5332G	62.23	68.20	-5.97	3	Vertical	360	1.14	-
5250MHz	Pass	PK	5.1364G	61.03	74.00	-12.97	3	Horizontal	10	1.01	-
5250MHz	Pass	AV	5.1436G	51.61	54.00	-2.39	3	Horizontal	10	1.01	-
5250MHz	Pass	PK	5.2388G	105.43	Inf	-Inf	3	Horizontal	10	1.01	-
5250MHz	Pass	AV	5.274G	95.30	Inf	-Inf	3	Horizontal	10	1.01	-
5250MHz	Pass	PK	5.354G	62.82	74.00	-11.18	3	Horizontal	10	1.01	-
5250MHz	Pass	AV	5.3588G	50.99	54.00	-3.01	3	Horizontal	10	1.01	-
5250MHz	Pass	PK	5.522G	62.39	68.20	-5.81	3	Horizontal	10	1.01	-
5250MHz	Pass	PK	10.47665G	55.15	68.20	-13.05	3	Vertical	337	2.37	-
5250MHz	Pass	PK	15.76755G	53.70	74.00	-20.30	3	Vertical	120	2.09	-
5250MHz	Pass	AV	15.74975G	42.71	54.00	-11.29	3	Vertical	120	2.09	-
5250MHz	Pass	PK	10.5059G	55.86	68.20	-12.34	3	Horizontal	5	2.25	-
5250MHz	Pass	PK	15.75905G	53.53	74.00	-20.47	3	Horizontal	330	2.27	-
5250MHz	Pass	AV	15.73555G	42.77	54.00	-11.23	3	Horizontal	330	2.27	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

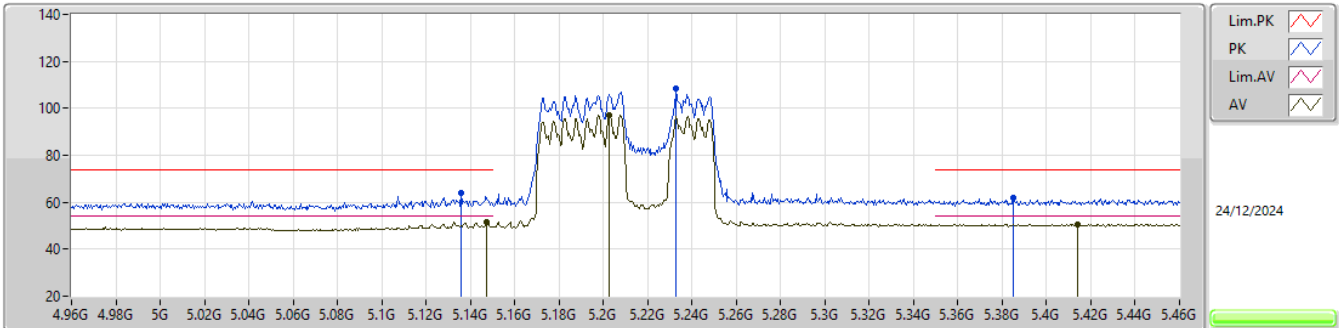


EUT_Y_4TX
Setting 42
02-V-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1355G	66.72	74.00	-7.28	57.08	3	Vertical	24	1.78	-	33.60	6.97	30.93			
AV	5.1425G	53.61	54.00	-0.39	43.97	3	Vertical	24	1.78	-	33.60	6.97	30.93			
PK	5.2325G	109.42	Inf	-Inf	99.53	3	Vertical	24	1.78	-	33.77	7.00	30.88			
AV	5.238G	98.27	Inf	-Inf	88.37	3	Vertical	24	1.78	-	33.78	7.00	30.88			
PK	5.4435G	61.63	74.00	-12.37	51.29	3	Vertical	24	1.78	-	34.00	7.10	30.76			
AV	5.398G	50.61	54.00	-3.39	40.44	3	Vertical	24	1.78	-	34.00	6.96	30.79			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

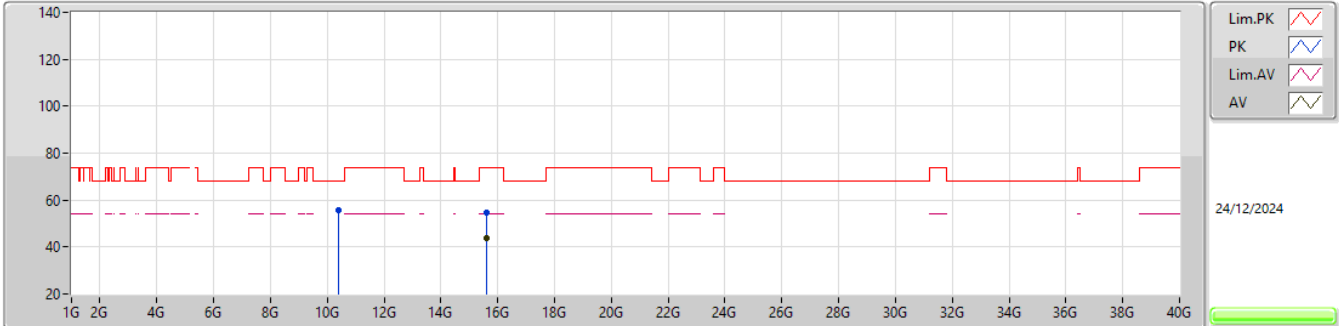
5210MHz_TX

EUT_Y_4TX
Setting 42
02-V-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.136G	64.00	74.00	-10.00	54.36	3	Horizontal	355	2.71	-	33.60	6.97	30.93			
AV	5.1475G	51.49	54.00	-2.51	41.84	3	Horizontal	355	2.71	-	33.60	6.98	30.93			
PK	5.233G	108.20	Inf	-Inf	98.31	3	Horizontal	355	2.71	-	33.77	7.00	30.88			
AV	5.2025G	97.04	Inf	-Inf	87.22	3	Horizontal	355	2.71	-	33.71	7.01	30.90			
PK	5.385G	61.99	74.00	-12.01	51.85	3	Horizontal	355	2.71	-	33.97	6.96	30.79			
AV	5.414G	50.69	54.00	-3.31	40.46	3	Horizontal	355	2.71	-	34.00	7.01	30.78			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

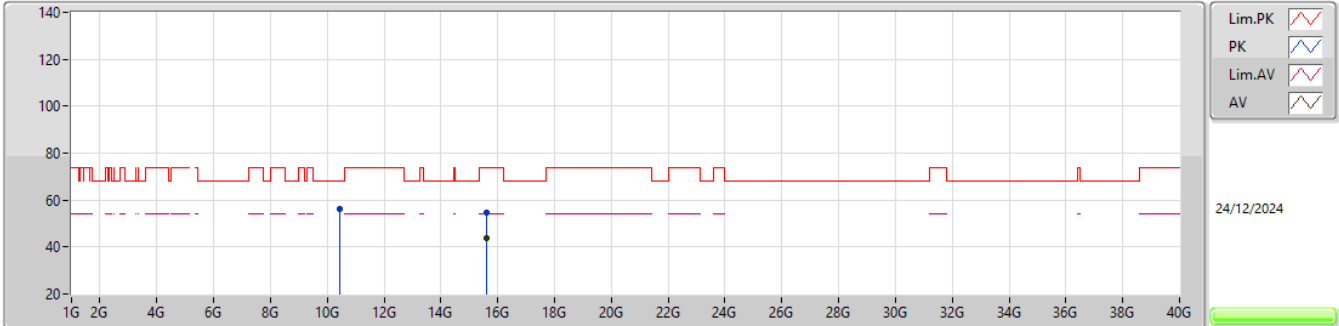


EUT_Y_4TX
Setting 42
02-V-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.41725G	55.74	68.20	-12.46	36.71	3	Vertical	124	1.43	-	38.47	11.07	30.51			
PK	15.61535G	54.59	74.00	-19.41	36.88	3	Vertical	210	1.49	-	37.84	11.85	31.98			
AV	15.61065G	43.83	54.00	-10.17	26.10	3	Vertical	210	1.49	-	37.86	11.85	31.98			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

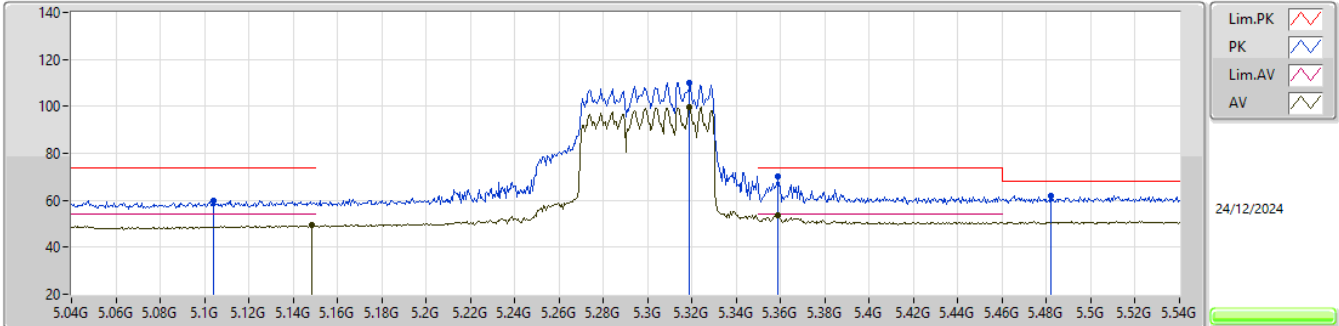


EUT_Y_4TX
Setting 42
02-V-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4405G	56.24	68.20	-11.96	37.23	3	Horizontal	25	2.17	-	38.42	11.09	30.50			
PK	15.6171G	54.59	74.00	-19.41	36.89	3	Horizontal	205	1.37	-	37.83	11.85	31.98			
AV	15.6081G	43.81	54.00	-10.19	26.07	3	Horizontal	205	1.37	-	37.87	11.85	31.98			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

5290MHz_TX

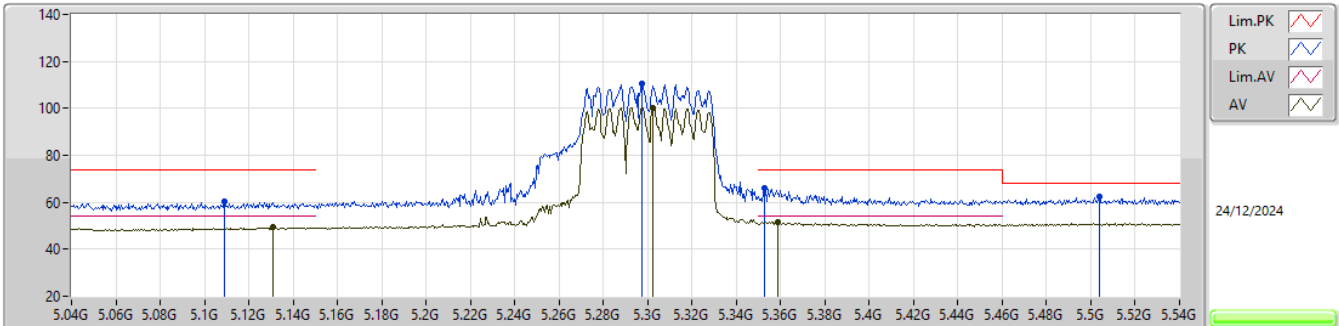


EUT_Y_4TX
Setting 46
02-V-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.104G	60.02	74.00	-13.98	50.42	3	Vertical	348	2.53	-	33.60	6.95	30.95			
AV	5.1485G	49.45	54.00	-4.55	39.80	3	Vertical	348	2.53	-	33.60	6.98	30.93			
PK	5.319G	110.21	Inf	-Inf	100.16	3	Vertical	348	2.53	-	33.90	6.98	30.83			
AV	5.319G	99.74	Inf	-Inf	89.69	3	Vertical	348	2.53	-	33.90	6.98	30.83			
PK	5.359G	70.12	74.00	-3.88	60.04	3	Vertical	348	2.53	-	33.92	6.97	30.81			
AV	5.3585G	53.53	54.00	-0.47	43.45	3	Vertical	348	2.53	-	33.92	6.97	30.81			
PK	5.482G	61.94	68.20	-6.26	51.39	3	Vertical	348	2.53	-	34.06	7.23	30.74			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

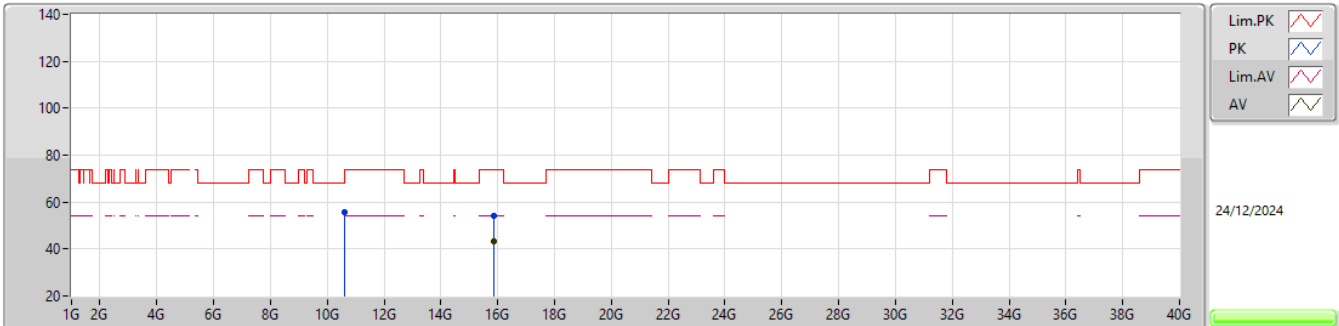
5290MHz_TX

EUT_Y_4TX
Setting 46
02-V-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.109G	60.37	74.00	-13.63	50.77	3	Horizontal	358	2.52	-	33.60	6.95	30.95			
AV	5.131G	49.28	54.00	-4.72	39.65	3	Horizontal	358	2.52	-	33.60	6.97	30.94			
PK	5.2975G	110.26	Inf	-Inf	100.22	3	Horizontal	358	2.52	-	33.89	6.99	30.84			
AV	5.3025G	100.32	Inf	-Inf	90.28	3	Horizontal	358	2.52	-	33.90	6.98	30.84			
PK	5.3525G	65.81	74.00	-8.19	55.74	3	Horizontal	358	2.52	-	33.91	6.97	30.81			
AV	5.359G	51.72	54.00	-2.28	41.64	3	Horizontal	358	2.52	-	33.92	6.97	30.81			
PK	5.504G	62.19	68.20	-6.01	51.53	3	Horizontal	358	2.52	-	34.09	7.30	30.73			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

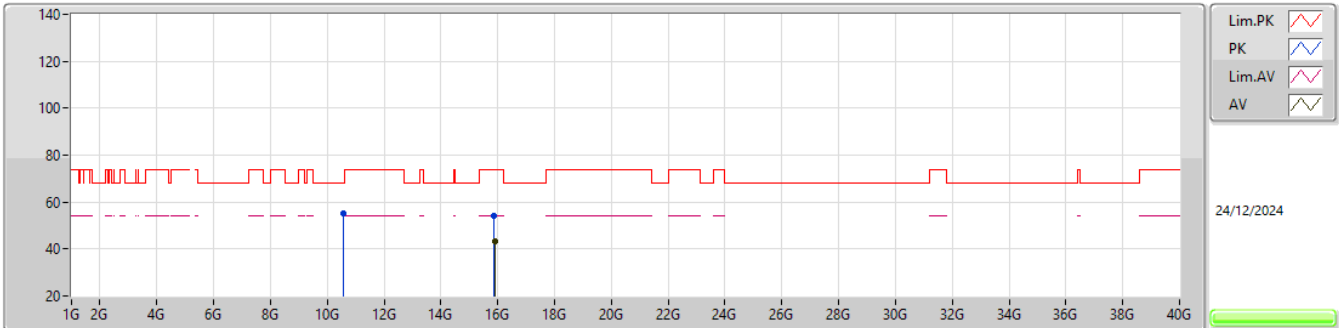
5290MHz_TX

EUT_Y_4TX
Setting 46
02-V-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5951G	55.48	68.20	-12.72	36.18	3	Vertical	18	1.24	-	38.60	11.19	30.49			
PK	15.8635G	54.26	74.00	-19.74	36.99	3	Vertical	201	1.18	-	37.55	11.86	32.14			
AV	15.8852G	43.35	54.00	-10.65	26.01	3	Vertical	201	1.18	-	37.64	11.86	32.16			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

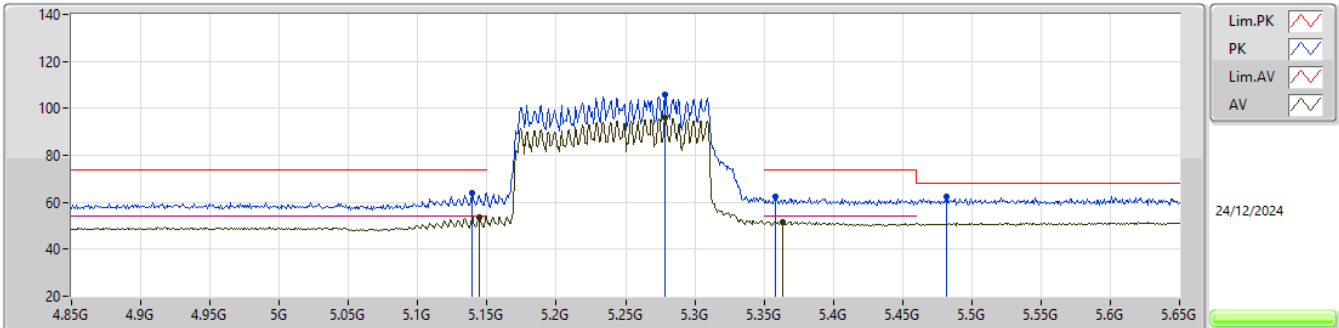
5290MHz_TX

EUT_Y_4TX
Setting 46
02-V-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5568G	55.37	68.20	-12.83	36.10	3	Horizontal	240	2.43	-	38.60	11.16	30.49			
PK	15.85255G	54.16	74.00	-19.84	36.93	3	Horizontal	45	2.73	-	37.51	11.86	32.14			
AV	15.88865G	43.23	54.00	-10.77	25.88	3	Horizontal	45	2.73	-	37.65	11.86	32.16			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX

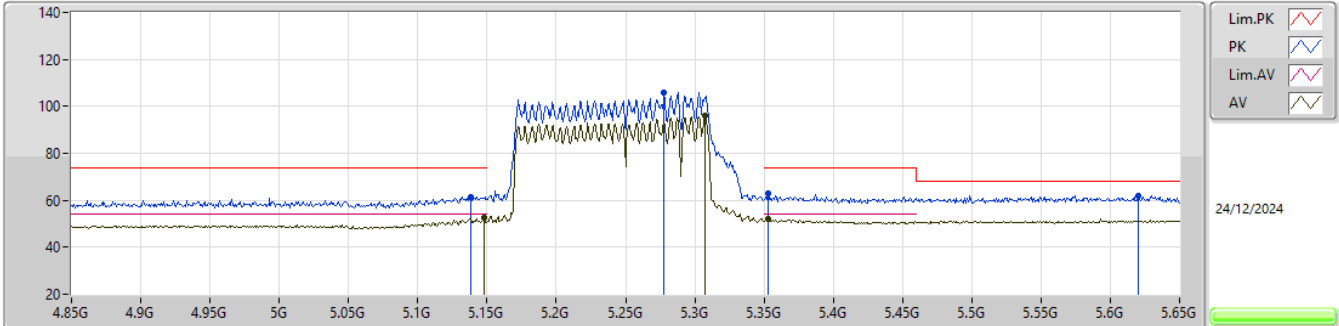
5250MHz_TX

EUT_Y_4TX
Setting 46
02-V-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1388G	63.90	74.00	-10.10	54.26	3	Vertical	348	2.71	-	33.60	6.97	30.93			
AV	5.1444G	53.73	54.00	-0.27	44.09	3	Vertical	348	2.71	-	33.60	6.97	30.93			
PK	5.2788G	106.12	Inf	-Inf	96.12	3	Vertical	348	2.71	-	33.86	6.99	30.85			
AV	5.2788G	95.95	Inf	-Inf	85.95	3	Vertical	348	2.71	-	33.86	6.99	30.85			
PK	5.358G	62.38	74.00	-11.62	52.30	3	Vertical	348	2.71	-	33.92	6.97	30.81			
AV	5.3636G	51.70	54.00	-2.30	41.61	3	Vertical	348	2.71	-	33.93	6.97	30.81			
PK	5.482G	62.64	68.20	-5.56	52.09	3	Vertical	348	2.71	-	34.06	7.23	30.74			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX

5250MHz_TX

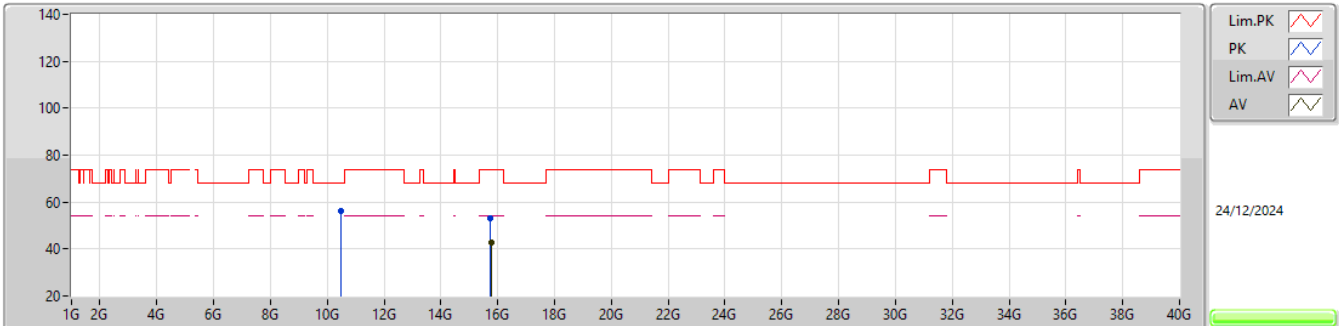


EUT_Y_4TX
Setting 46
02-V-B-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.138G	61.48	74.00	-12.52	51.84	3	Horizontal	357	2.51	-	33.60	6.97	30.93				
AV	5.1476G	52.71	54.00	-1.29	43.06	3	Horizontal	357	2.51	-	33.60	6.98	30.93				
PK	5.278G	106.10	Inf	-Inf	96.10	3	Horizontal	357	2.51	-	33.86	6.99	30.85				
AV	5.3076G	96.03	Inf	-Inf	85.99	3	Horizontal	357	2.51	-	33.90	6.98	30.84				
PK	5.3532G	62.69	74.00	-11.31	52.62	3	Horizontal	357	2.51	-	33.91	6.97	30.81				
AV	5.3532G	52.10	54.00	-1.90	42.03	3	Horizontal	357	2.51	-	33.91	6.97	30.81				
PK	5.6204G	62.15	68.20	-6.05	51.21	3	Horizontal	357	2.51	-	34.00	7.64	30.70				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX

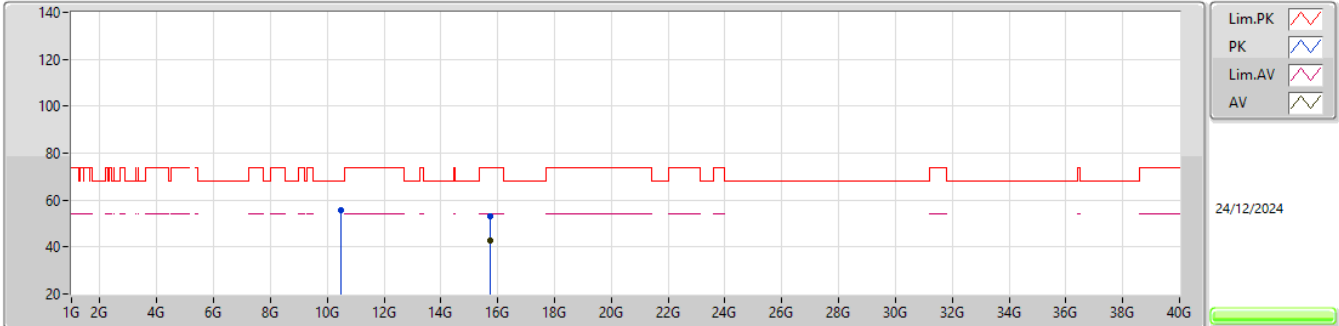
5250MHz_TX

EUT_Y_4TX
Setting 46
02-V-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47655G	55.95	68.20	-12.25	36.89	3	Vertical	357	1.53	-	38.45	11.11	30.50			
PK	15.72875G	53.32	74.00	-20.68	35.98	3	Vertical	50	2.99	-	37.54	11.86	32.06			
AV	15.7732G	42.56	54.00	-11.44	25.33	3	Vertical	50	2.99	-	37.45	11.86	32.08			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 8_4TX

5250MHz_TX

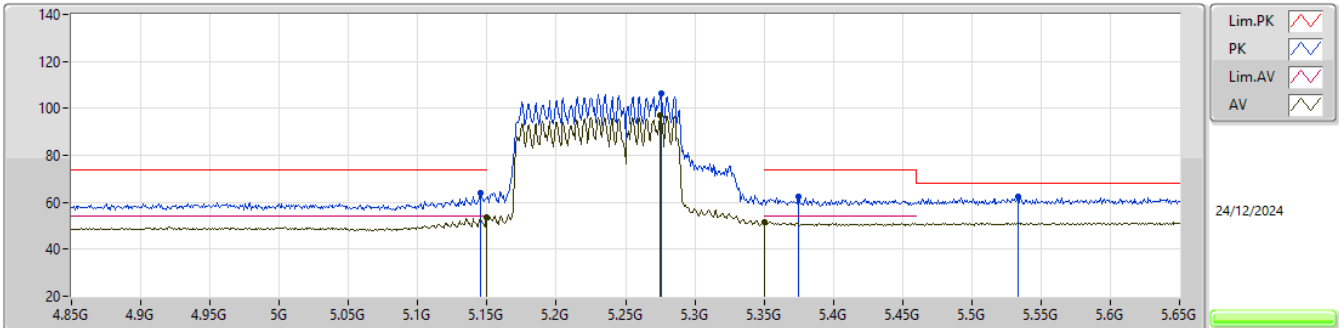


EUT_Y_4TX
Setting 46
02-V-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.4753G	55.69	68.20	-12.51	36.63	3	Horizontal	6	1.42	-	38.45	11.11	30.50				
PK	15.72675G	53.34	74.00	-20.66	35.99	3	Horizontal	279	1.70	-	37.55	11.86	32.06				
AV	15.7264G	42.66	54.00	-11.34	25.30	3	Horizontal	279	1.70	-	37.55	11.86	32.05				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

5250MHz_TX

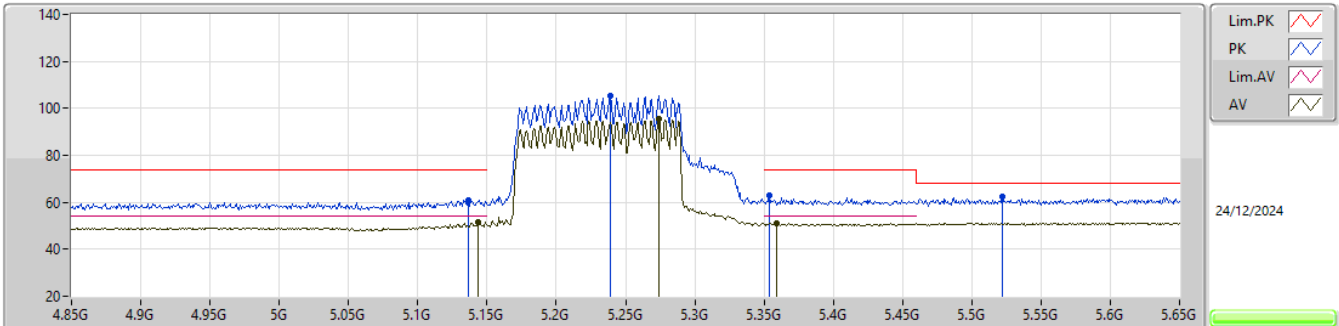


EUT_Y_4TX
Setting 37
02-V-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1452G	63.93	74.00	-10.07	54.29	3	Vertical	360	1.14	-	33.60	6.97	30.93				
AV	5.15G	53.79	54.00	-0.21	44.14	3	Vertical	360	1.14	-	33.60	6.98	30.93				
PK	5.2756G	106.52	Inf	-Inf	96.54	3	Vertical	360	1.14	-	33.85	6.99	30.86				
AV	5.2748G	97.05	Inf	-Inf	87.07	3	Vertical	360	1.14	-	33.85	6.99	30.86				
PK	5.3748G	62.35	74.00	-11.65	52.23	3	Vertical	360	1.14	-	33.95	6.97	30.80				
AV	5.35G	51.64	54.00	-2.36	41.58	3	Vertical	360	1.14	-	33.90	6.97	30.81				
PK	5.5332G	62.23	68.20	-5.97	51.52	3	Vertical	360	1.14	-	34.03	7.40	30.72				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

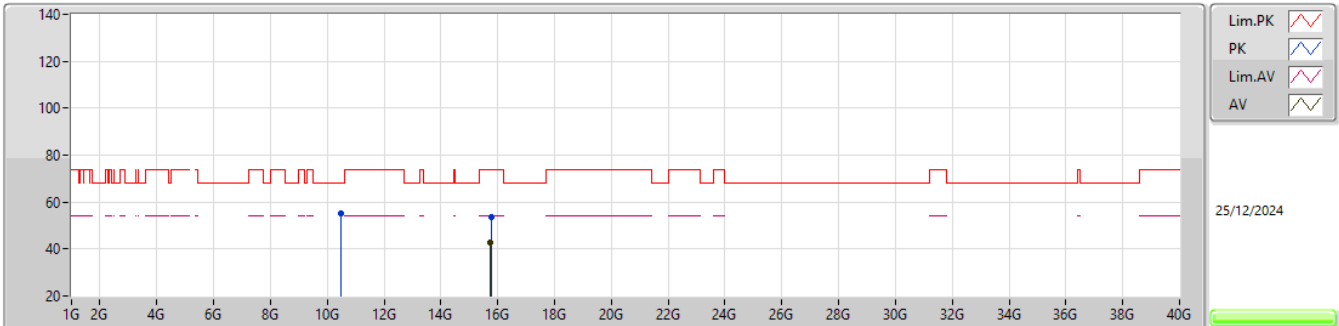
5250MHz_TX

EUT_Y_4TX
Setting 37
02-V-B-5-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1364G	61.03	74.00	-12.97	51.39	3	Horizontal	10	1.01	-	33.60	6.97	30.93				
AV	5.1436G	51.61	54.00	-2.39	41.97	3	Horizontal	10	1.01	-	33.60	6.97	30.93				
PK	5.2388G	105.43	Inf	-Inf	95.53	3	Horizontal	10	1.01	-	33.78	7.00	30.88				
AV	5.274G	95.30	Inf	-Inf	85.32	3	Horizontal	10	1.01	-	33.85	6.99	30.86				
PK	5.354G	62.82	74.00	-11.18	52.75	3	Horizontal	10	1.01	-	33.91	6.97	30.81				
AV	5.3588G	50.99	54.00	-3.01	40.91	3	Horizontal	10	1.01	-	33.92	6.97	30.81				
PK	5.522G	62.39	68.20	-5.81	51.69	3	Horizontal	10	1.01	-	34.06	7.36	30.72				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

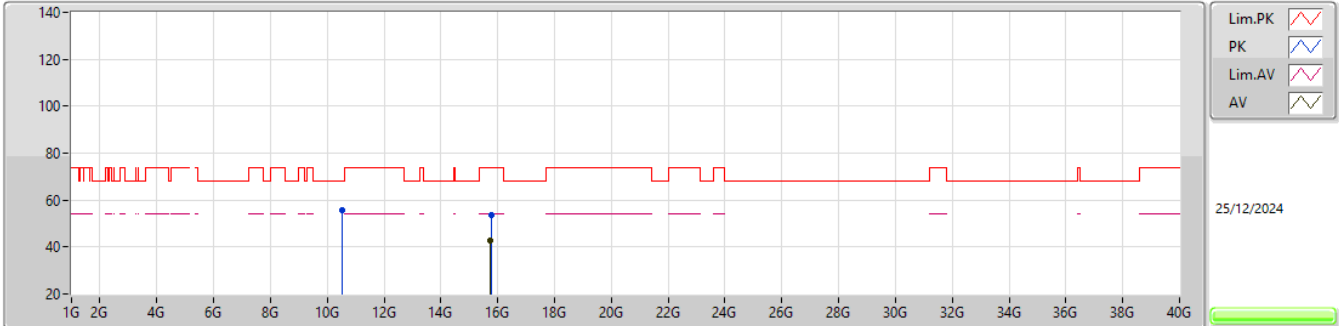
5250MHz_TX

EUT_Y_4TX
Setting 37
02-V-B-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.47665G	55.15	68.20	-13.05	36.09	3	Vertical	337	2.37	-	38.45	11.11	30.50			
PK	15.76755G	53.70	74.00	-20.30	36.46	3	Vertical	120	2.09	-	37.46	11.86	32.08			
AV	15.74975G	42.71	54.00	-11.29	25.42	3	Vertical	120	2.09	-	37.50	11.86	32.07			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX

5250MHz_TX



EUT_Y_4TX
Setting 37
02-V-B-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	10.5059G	55.86	68.20	-12.34	36.71	3	Horizontal	5	2.25	-	38.51	11.13	30.49				
PK	15.75905G	53.53	74.00	-20.47	36.27	3	Horizontal	330	2.27	-	37.48	11.86	32.08				
AV	15.73555G	42.77	54.00	-11.23	25.44	3	Horizontal	330	2.27	-	37.53	11.86	32.06				



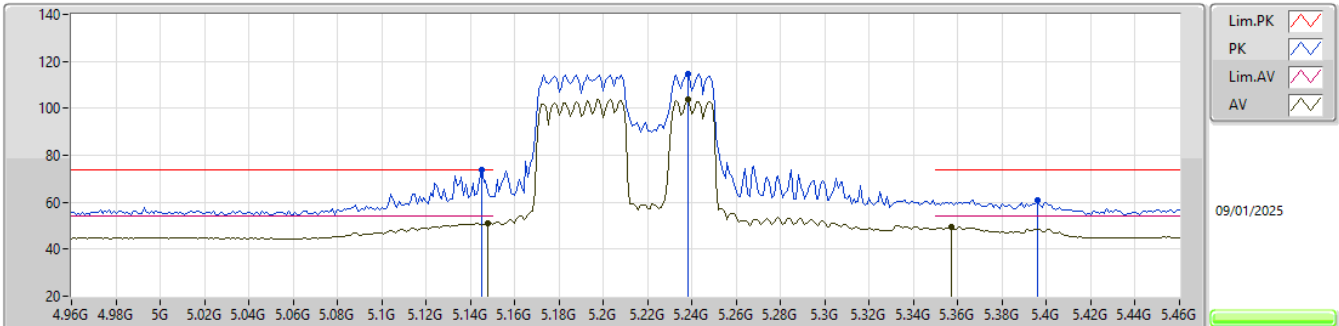
Test Mode: Mode 14

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 1_4TX	Pass	PK	5.468G	68.13	68.20	-0.07	3	Vertical	360	1.93	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

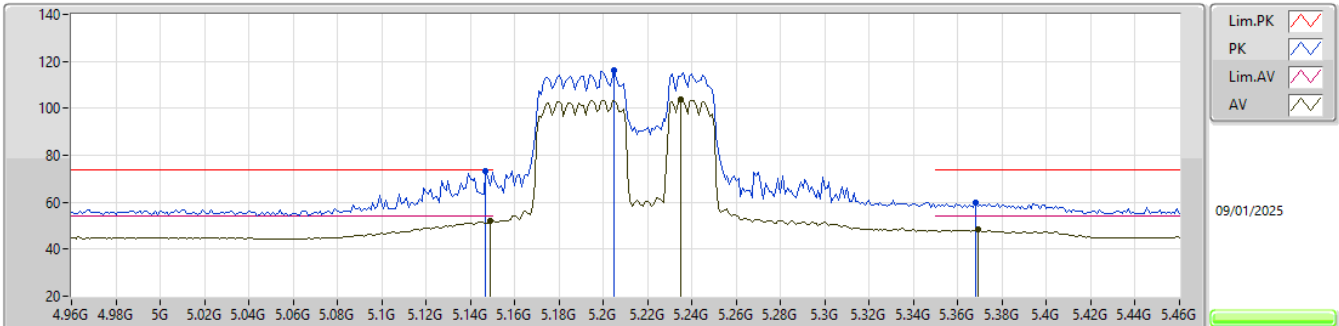


EUT_Z_4TX
Setting 40
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.145G	73.62	74.00	-0.38	68.91	3	Vertical	360	1.48	-	31.98	6.77	34.04
AV	5.148G	51.15	54.00	-2.85	46.43	3	Vertical	360	1.48	-	31.99	6.77	34.04
PK	5.238G	114.80	Inf	-Inf	110.54	3	Vertical	360	1.48	-	31.47	6.86	34.07
AV	5.238G	103.65	Inf	-Inf	99.39	3	Vertical	360	1.48	-	31.47	6.86	34.07
PK	5.396G	60.89	74.00	-13.11	56.64	3	Vertical	360	1.48	-	31.49	6.88	34.12
AV	5.357G	49.28	54.00	-4.72	45.10	3	Vertical	360	1.48	-	31.41	6.87	34.10

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

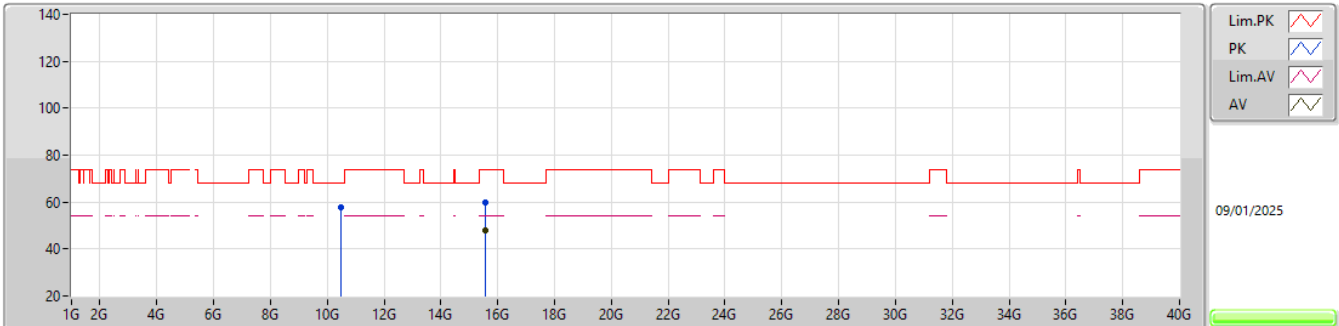


EUT_Z_4TX
Setting 40
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.147G	73.03	74.00	-0.97	68.31	3	Horizontal	356	1.41	-	31.99	6.77	34.04
AV	5.149G	52.12	54.00	-1.88	47.38	3	Horizontal	356	1.41	-	32.00	6.78	34.04
PK	5.205G	116.29	Inf	-Inf	111.83	3	Horizontal	356	1.41	-	31.67	6.85	34.06
AV	5.235G	103.65	Inf	-Inf	99.37	3	Horizontal	356	1.41	-	31.49	6.86	34.07
PK	5.368G	59.72	74.00	-14.28	55.51	3	Horizontal	356	1.41	-	31.44	6.88	34.11
AV	5.369G	48.43	54.00	-5.57	44.22	3	Horizontal	356	1.41	-	31.44	6.88	34.11

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

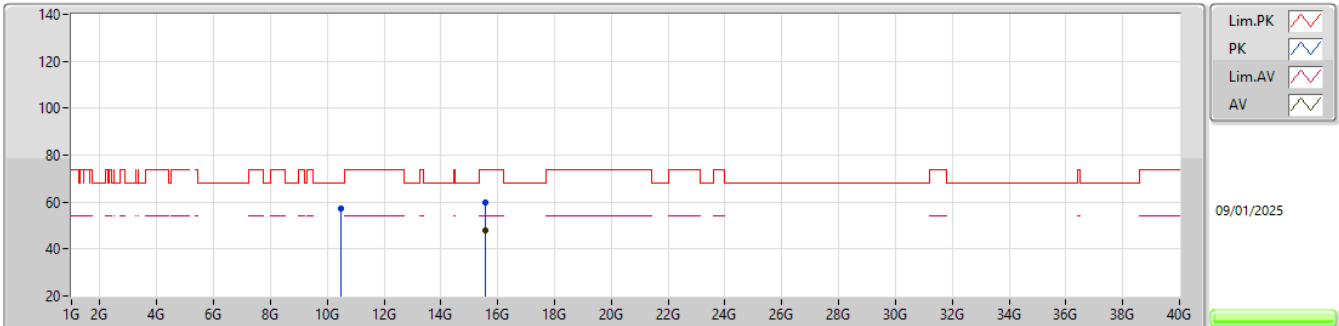


EUT_Z_4TX
Setting 40
06-E-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	10.4878G	57.73	68.20	-10.47	41.43	3	Vertical	284	1.42	-	39.70	11.10	34.50			
PK	15.5637G	59.75	74.00	-14.25	42.62	3	Vertical	40	2.37	-	38.15	13.11	34.13			
AV	15.5559G	47.78	54.00	-6.22	30.62	3	Vertical	40	2.37	-	38.18	13.11	34.13			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

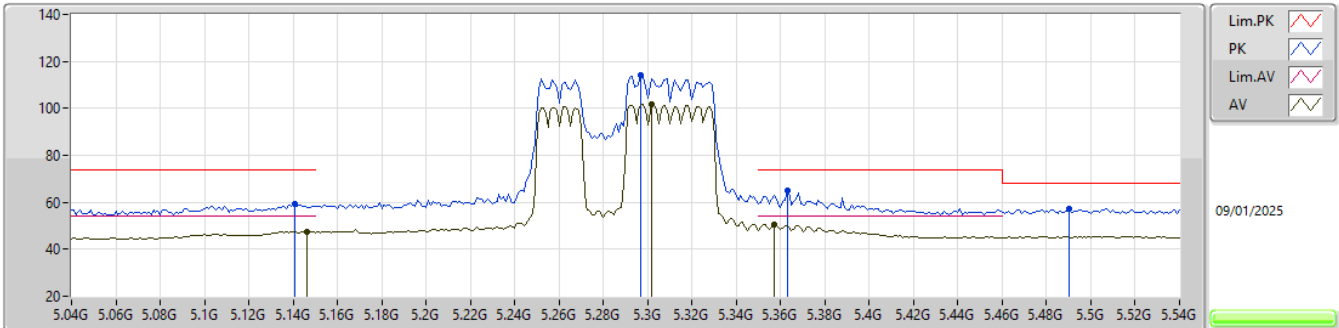
5210MHz_TX

EUT_Z_4TX
Setting 40
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4806G	57.21	68.20	-10.99	40.92	3	Horizontal	114	2.08	-	39.70	11.09	34.50			
PK	15.564G	59.62	74.00	-14.38	42.50	3	Horizontal	115	1.25	-	38.14	13.11	34.13			
AV	15.5661G	47.75	54.00	-6.25	30.62	3	Horizontal	115	1.25	-	38.14	13.12	34.13			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

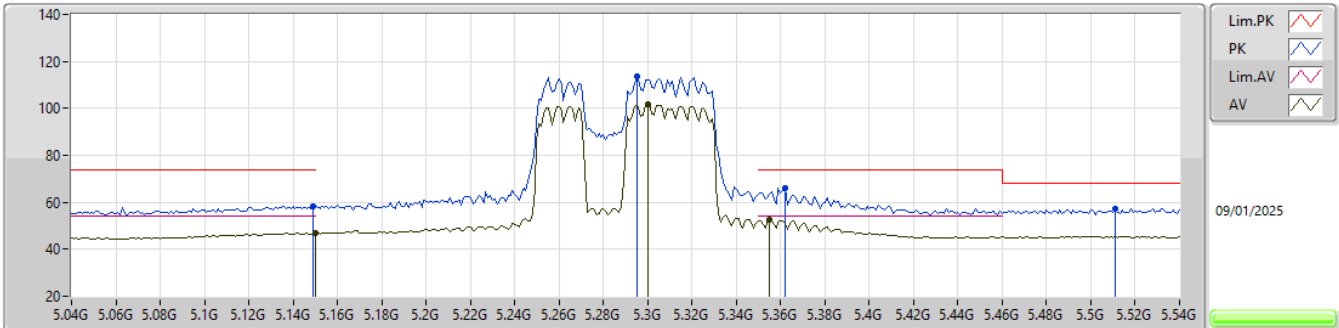
5290MHz_TX

EUT_Z_4TX
Setting 37
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.141G	59.11	74.00	-14.89	54.43	3	Vertical	360	1.80	-	31.96	6.76	34.04			
AV	5.146G	47.48	54.00	-6.52	42.77	3	Vertical	360	1.80	-	31.98	6.77	34.04			
PK	5.297G	113.91	Inf	-Inf	109.83	3	Vertical	360	1.80	-	31.31	6.86	34.09			
AV	5.302G	101.48	Inf	-Inf	97.40	3	Vertical	360	1.80	-	31.30	6.87	34.09			
PK	5.363G	64.95	74.00	-9.05	60.76	3	Vertical	360	1.80	-	31.43	6.87	34.11			
AV	5.357G	50.72	54.00	-3.28	46.54	3	Vertical	360	1.80	-	31.41	6.87	34.10			
PK	5.49G	57.35	68.20	-10.85	52.83	3	Vertical	360	1.80	-	31.78	6.89	34.15			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

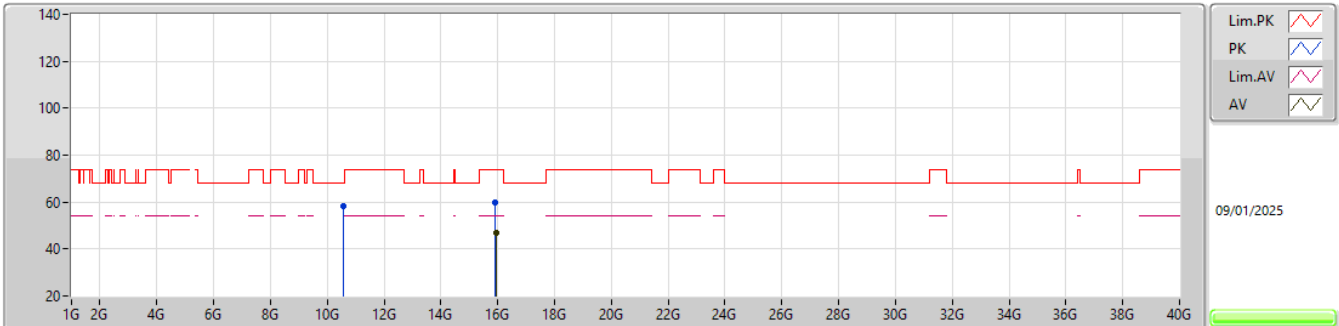
5290MHz_TX

EUT_Z_4TX
Setting 37
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.149G	58.42	74.00	-15.58	53.68	3	Horizontal	353	1.51	-	32.00	6.78	34.04			
AV	5.15G	46.90	54.00	-7.10	42.16	3	Horizontal	353	1.51	-	32.00	6.78	34.04			
PK	5.295G	113.72	Inf	-Inf	109.63	3	Horizontal	353	1.51	-	31.31	6.86	34.08			
AV	5.3G	101.83	Inf	-Inf	97.75	3	Horizontal	353	1.51	-	31.30	6.87	34.09			
PK	5.362G	66.24	74.00	-7.76	62.06	3	Horizontal	353	1.51	-	31.42	6.87	34.11			
AV	5.355G	52.38	54.00	-1.62	48.20	3	Horizontal	353	1.51	-	31.41	6.87	34.10			
PK	5.511G	57.28	68.20	-10.92	52.74	3	Horizontal	353	1.51	-	31.80	6.90	34.16			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

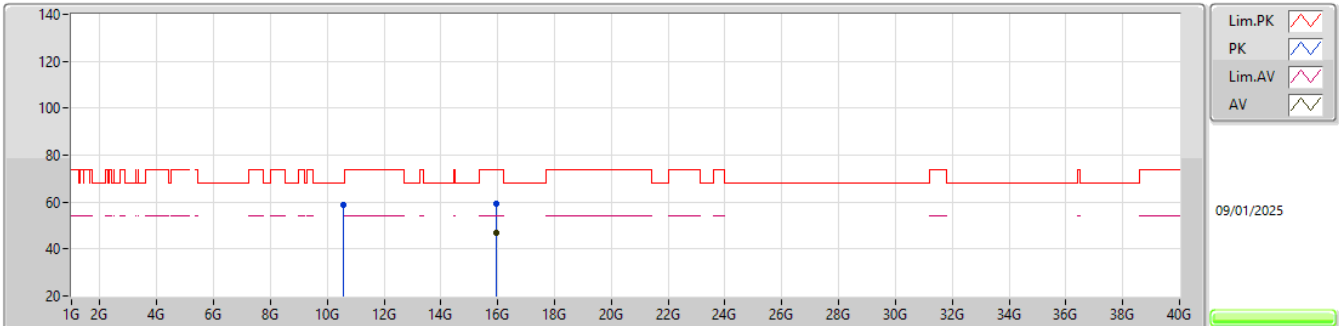
5290MHz_TX

EUT_Z_4TX
Setting 37
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5557G	58.47	68.20	-9.73	42.09	3	Vertical	147	1.38	-	39.71	11.14	34.47			
PK	15.9006G	59.66	74.00	-14.34	42.83	3	Vertical	62	2.04	-	37.70	13.35	34.22			
AV	15.9426G	47.03	54.00	-6.97	30.35	3	Vertical	62	2.04	-	37.53	13.38	34.23			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

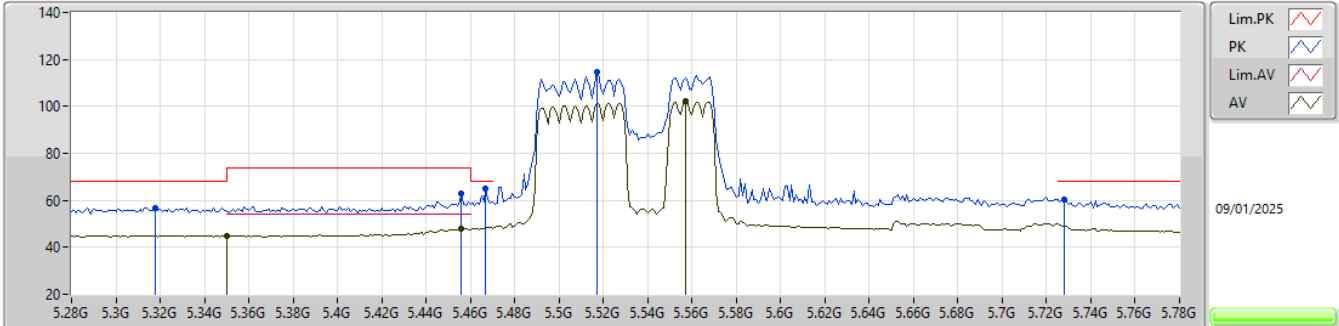
5290MHz_TX

EUT_Z_4TX
Setting 37
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5761G	58.79	68.20	-9.41	42.35	3	Horizontal	235	2.82	-	39.75	11.15	34.46			
PK	15.9426G	59.16	74.00	-14.84	42.48	3	Horizontal	12	2.90	-	37.53	13.38	34.23			
AV	15.9309G	46.79	54.00	-7.21	30.07	3	Horizontal	12	2.90	-	37.58	13.37	34.23			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

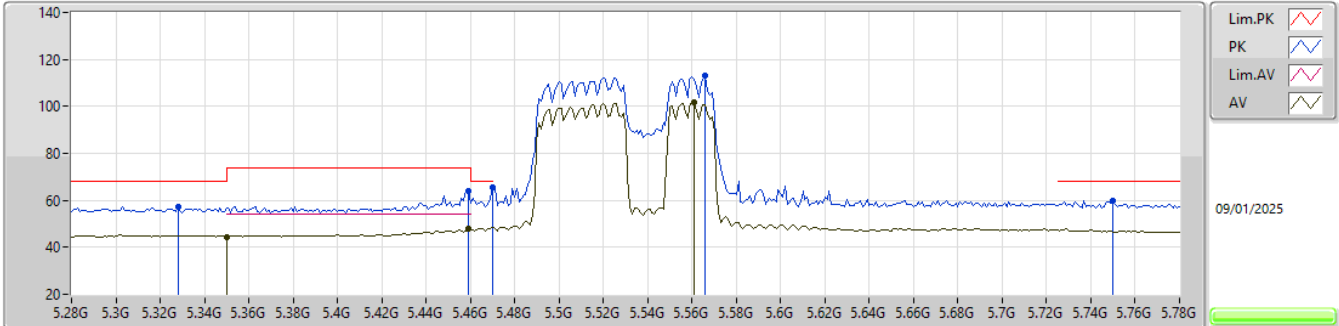


EUT_Z_4TX
Setting 37
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.318G	56.73	68.20	-11.47	52.61	3	Vertical	360	2.24	-	31.34	6.87	34.09			
AV	5.35G	44.73	54.00	-9.27	40.56	3	Vertical	360	2.24	-	31.40	6.87	34.10			
PK	5.456G	63.03	74.00	-10.97	58.57	3	Vertical	360	2.24	-	31.71	6.89	34.14			
AV	5.456G	47.73	54.00	-6.27	43.27	3	Vertical	360	2.24	-	31.71	6.89	34.14			
PK	5.467G	64.83	68.20	-3.37	60.35	3	Vertical	360	2.24	-	31.73	6.89	34.14			
PK	5.517G	114.74	Inf	-Inf	110.21	3	Vertical	360	2.24	-	31.80	6.90	34.17			
AV	5.557G	102.24	Inf	-Inf	97.76	3	Vertical	360	2.24	-	31.79	6.90	34.21			
PK	5.728G	60.59	68.20	-7.61	55.80	3	Vertical	360	2.24	-	32.10	7.08	34.39			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5530MHz_TX

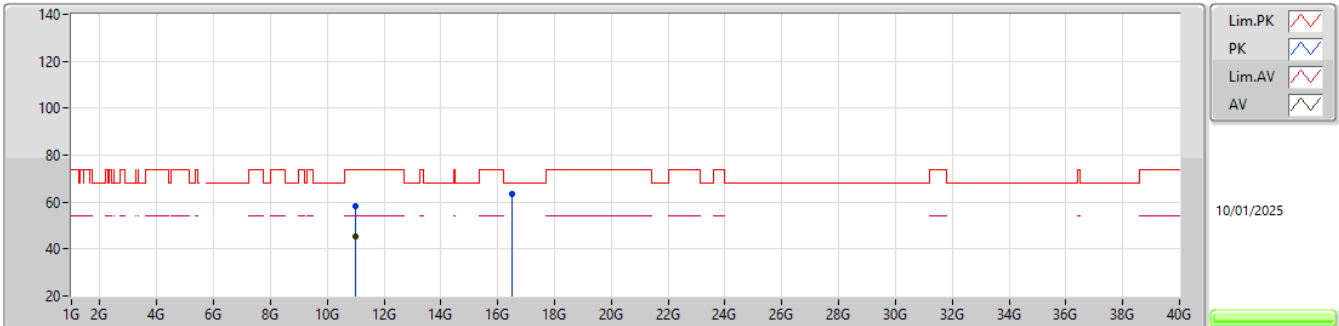


EUT_Z_4TX
Setting 37
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.328G	57.23	68.20	-10.97	53.09	3	Horizontal	348	1.72	-	31.36	6.87	34.09				
AV	5.35G	44.50	54.00	-9.50	40.33	3	Horizontal	348	1.72	-	31.40	6.87	34.10				
PK	5.459G	63.86	74.00	-10.14	59.39	3	Horizontal	348	1.72	-	31.72	6.89	34.14				
AV	5.459G	47.75	54.00	-6.25	43.28	3	Horizontal	348	1.72	-	31.72	6.89	34.14				
PK	5.47G	65.58	68.20	-2.62	61.09	3	Horizontal	348	1.72	-	31.74	6.89	34.14				
PK	5.566G	113.19	Inf	-Inf	108.74	3	Horizontal	348	1.72	-	31.77	6.90	34.22				
AV	5.561G	101.71	Inf	-Inf	97.24	3	Horizontal	348	1.72	-	31.78	6.90	34.21				
PK	5.75G	59.77	68.20	-8.43	54.97	3	Horizontal	348	1.72	-	32.10	7.11	34.41				

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

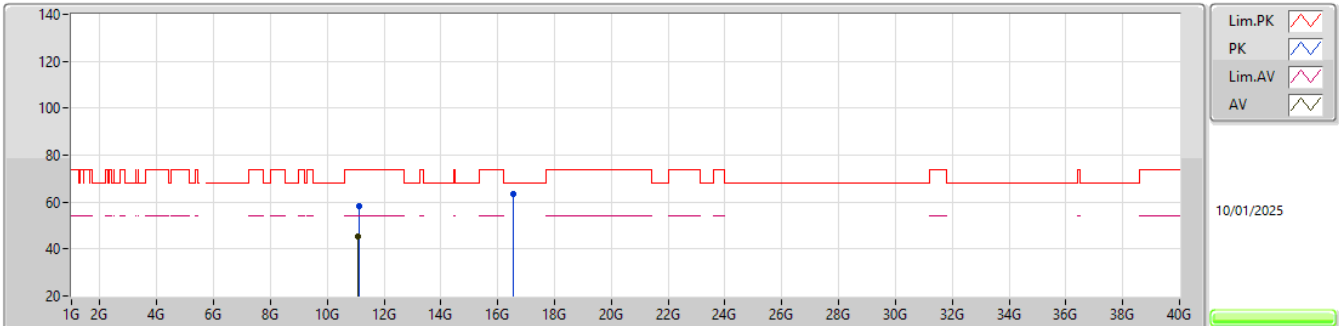
5530MHz_TX

EUT_Z_4TX
Setting 37
06-E-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0114G	58.32	74.00	-15.68	40.96	3	Vertical	134	2.09	-	40.15	11.44	34.23			
AV	10.994G	45.49	54.00	-8.51	28.06	3	Vertical	134	2.09	-	40.21	11.43	34.21			
PK	16.5225G	63.45	68.20	-4.75	44.43	3	Vertical	33	2.46	-	39.70	13.60	34.28			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

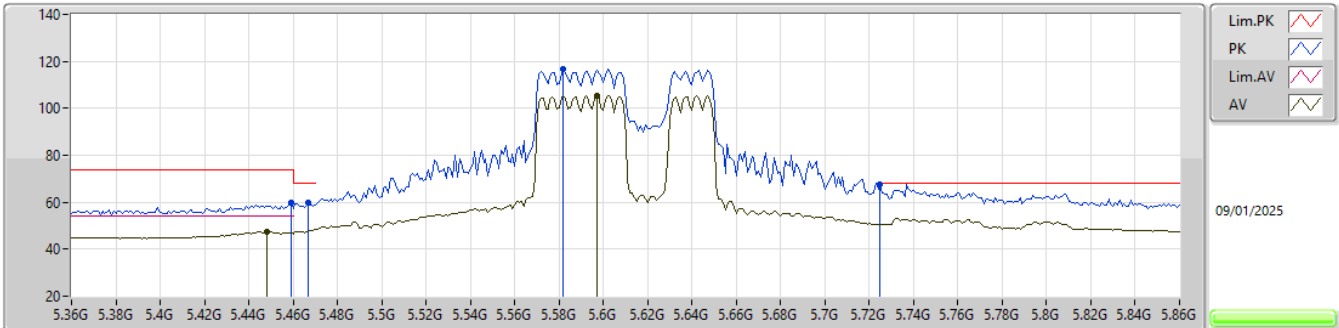
5530MHz_TX

EUT_Z_4TX
Setting 37
06-E-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.126G	58.47	74.00	-15.53	41.73	3	Horizontal	136	1.18	-	39.64	11.51	34.41			
AV	11.1012G	45.52	54.00	-8.48	28.60	3	Horizontal	136	1.18	-	39.79	11.50	34.37			
PK	16.5642G	63.43	68.20	-4.77	44.46	3	Horizontal	200	1.81	-	39.64	13.61	34.28			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

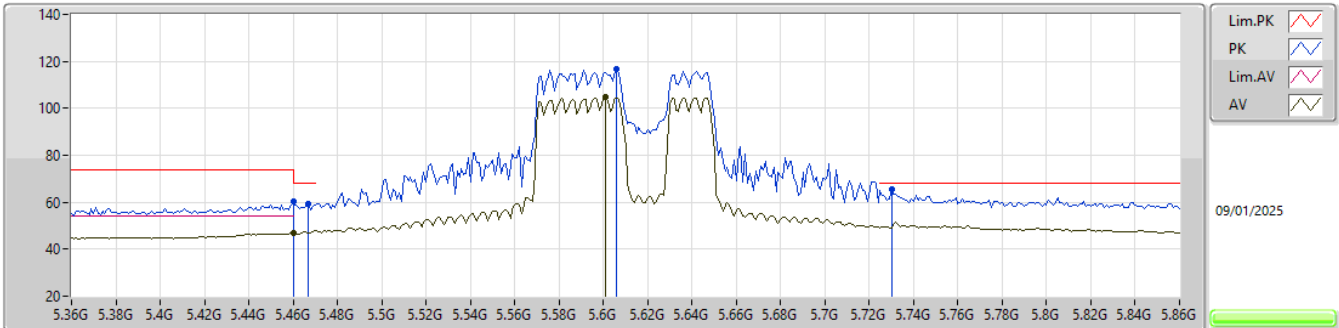
5610MHz_TX

EUT_Z_4TX
Setting 46
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.459G	59.72	74.00	-14.28	55.25	3	Vertical	358	2.03	-	31.72	6.89	34.14			
AV	5.448G	47.30	54.00	-6.70	42.85	3	Vertical	358	2.03	-	31.69	6.89	34.13			
PK	5.467G	59.70	68.20	-8.50	55.22	3	Vertical	358	2.03	-	31.73	6.89	34.14			
PK	5.582G	116.87	Inf	-Inf	112.46	3	Vertical	358	2.03	-	31.74	6.91	34.24			
AV	5.597G	105.59	Inf	-Inf	101.22	3	Vertical	358	2.03	-	31.71	6.91	34.25			
PK	5.725G	67.75	68.20	-0.45	62.96	3	Vertical	358	2.03	-	32.10	7.08	34.39			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5610MHz_TX

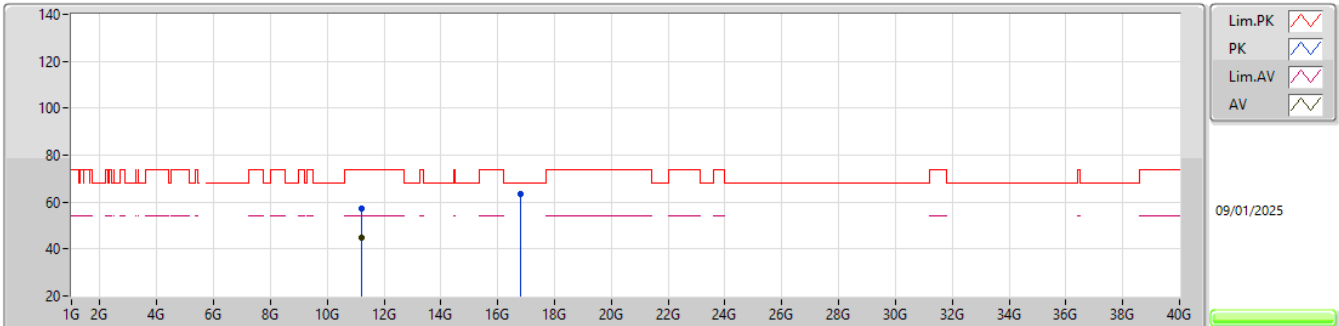


EUT_Z_4TX
Setting 46
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.46G	60.60	74.00	-13.40	56.13	3	Horizontal	354	1.80	-	31.72	6.89	34.14
AV	5.46G	46.94	54.00	-7.06	42.47	3	Horizontal	354	1.80	-	31.72	6.89	34.14
PK	5.467G	59.43	68.20	-8.77	54.95	3	Horizontal	354	1.80	-	31.73	6.89	34.14
PK	5.606G	116.85	Inf	-Inf	112.47	3	Horizontal	354	1.80	-	31.72	6.92	34.26
AV	5.601G	104.66	Inf	-Inf	100.31	3	Horizontal	354	1.80	-	31.70	6.91	34.26
PK	5.73G	65.52	68.20	-2.68	60.72	3	Horizontal	354	1.80	-	32.10	7.09	34.39

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

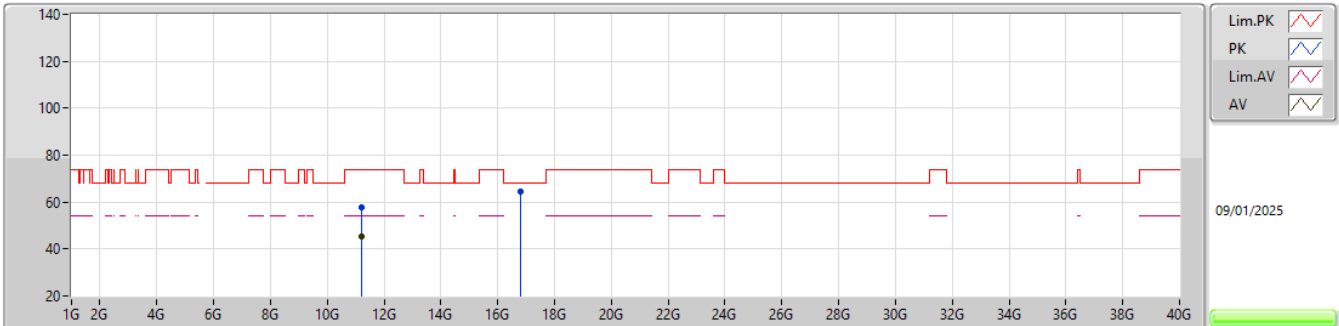
5610MHz_TX

EUT_Z_4TX
Setting 46
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.225G	57.47	74.00	-16.53	41.00	3	Vertical	322	2.54	-	39.45	11.58	34.56			
AV	11.2176G	44.95	54.00	-9.05	28.49	3	Vertical	322	2.54	-	39.44	11.57	34.55			
PK	16.8086G	63.46	68.20	-4.74	43.47	3	Vertical	109	1.39	-	40.57	13.69	34.27			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

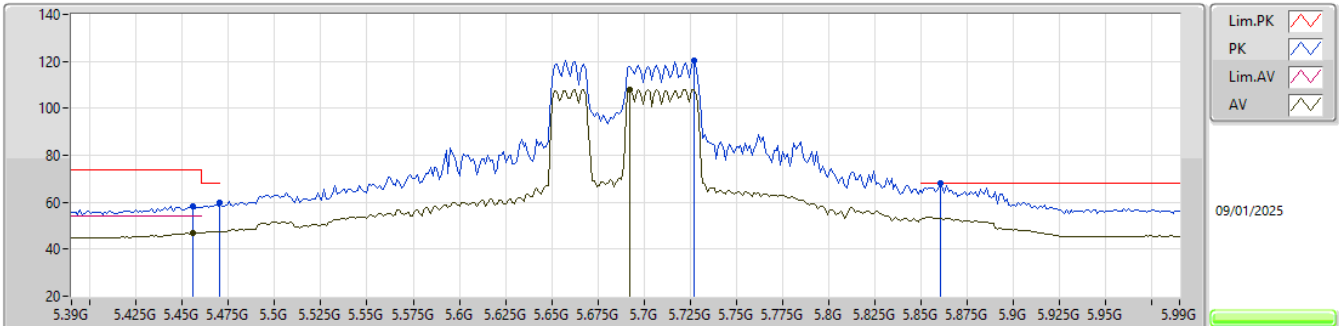
5610MHz_TX

EUT_Z_4TX
Setting 46
06-E-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.2272G	58.01	74.00	-15.99	41.54	3	Horizontal	295	2.15	-	39.45	11.58	34.56			
AV	11.2135G	45.21	54.00	-8.79	28.75	3	Horizontal	295	2.15	-	39.43	11.57	34.54			
PK	16.8109G	64.61	68.20	-3.59	44.59	3	Horizontal	343	2.54	-	40.59	13.70	34.27			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

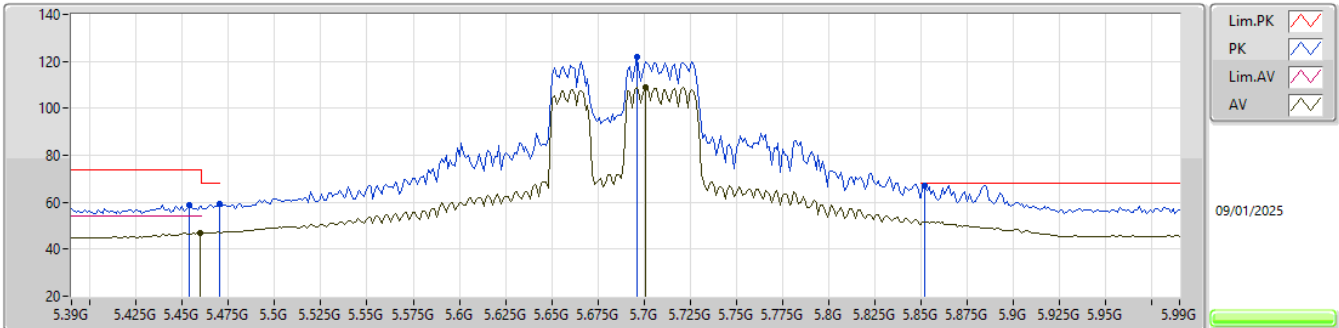
5690MHz Straddle 5.47-5.725GHz_TX

EUT_Z_4TX
Setting 58
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.456G	58.13	74.00	-15.87	53.67	3	Vertical	357	2.00	-	31.71	6.89	34.14
AV	5.456G	46.93	54.00	-7.07	42.47	3	Vertical	357	2.00	-	31.71	6.89	34.14
PK	5.47G	59.96	68.20	-8.24	55.47	3	Vertical	357	2.00	-	31.74	6.89	34.14
PK	5.7272G	120.33	Inf	-Inf	115.54	3	Vertical	357	2.00	-	32.10	7.08	34.39
AV	5.6924G	108.10	Inf	-Inf	103.35	3	Vertical	357	2.00	-	32.07	7.03	34.35
PK	5.8604G	67.89	68.20	-0.31	62.96	3	Vertical	357	2.00	-	32.24	7.22	34.53

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

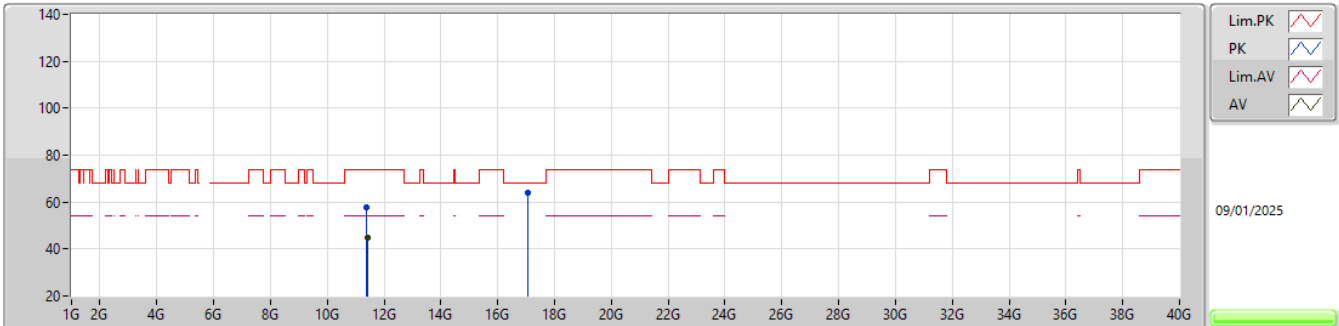
5690MHz Straddle 5.47-5.725GHz_TX

EUT_Z_4TX
Setting 58
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.4536G	58.91	74.00	-15.09	54.45	3	Horizontal	350	1.92	-	31.71	6.89	34.14
AV	5.4596G	46.86	54.00	-7.14	42.39	3	Horizontal	350	1.92	-	31.72	6.89	34.14
PK	5.47G	59.21	68.20	-8.99	54.72	3	Horizontal	350	1.92	-	31.74	6.89	34.14
PK	5.696G	121.64	Inf	-Inf	116.88	3	Horizontal	350	1.92	-	32.08	7.04	34.36
AV	5.7008G	108.96	Inf	-Inf	104.17	3	Horizontal	350	1.92	-	32.10	7.05	34.36
PK	5.852G	67.23	68.20	-0.97	62.32	3	Horizontal	350	1.92	-	32.21	7.22	34.52

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

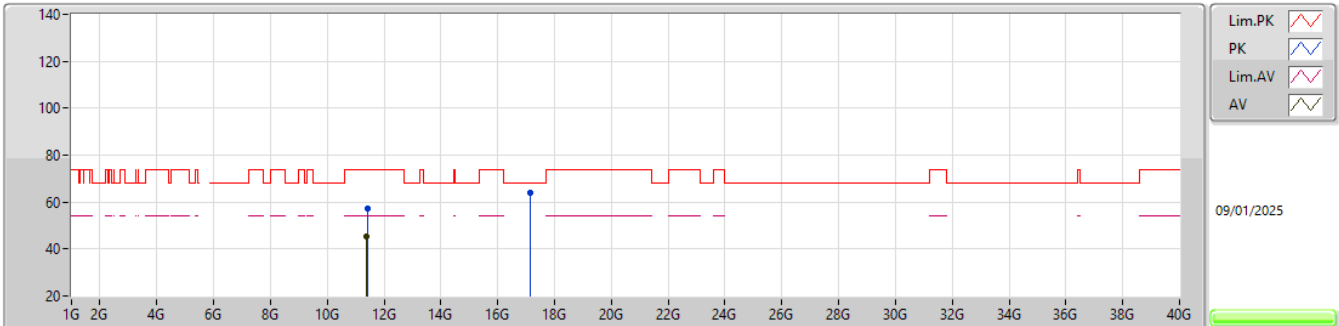
5690MHz Straddle 5.47-5.725GHz_TX

EUT_Z_4TX
Setting 58
06-E-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.3875G	57.82	74.00	-16.18	41.18	3	Vertical	299	1.80	-	39.77	11.68	34.81			
AV	11.422G	45.07	54.00	-8.93	28.44	3	Vertical	299	1.80	-	39.80	11.70	34.87			
PK	17.0481G	63.82	68.20	-4.38	43.80	3	Vertical	123	1.51	-	40.49	13.78	34.25			

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX

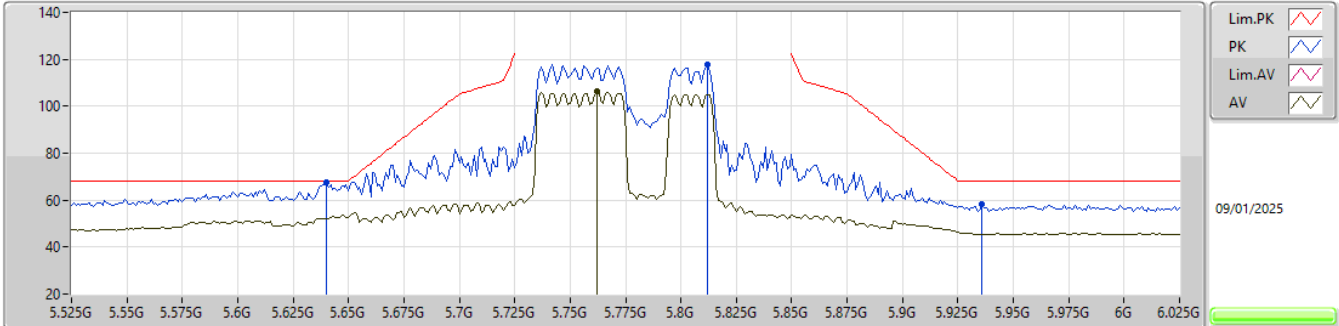
5690MHz Straddle 5.47-5.725GHz_TX

EUT_Z_4TX
Setting 58
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.4253G	57.33	74.00	-16.67	40.69	3	Horizontal	272	2.12	-	39.80	11.71	34.87			
AV	11.3671G	45.18	54.00	-8.82	28.56	3	Horizontal	272	2.12	-	39.73	11.67	34.78			
PK	17.1438G	64.11	68.20	-4.09	44.04	3	Horizontal	327	2.39	-	40.49	13.81	34.23			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5775MHz_TX

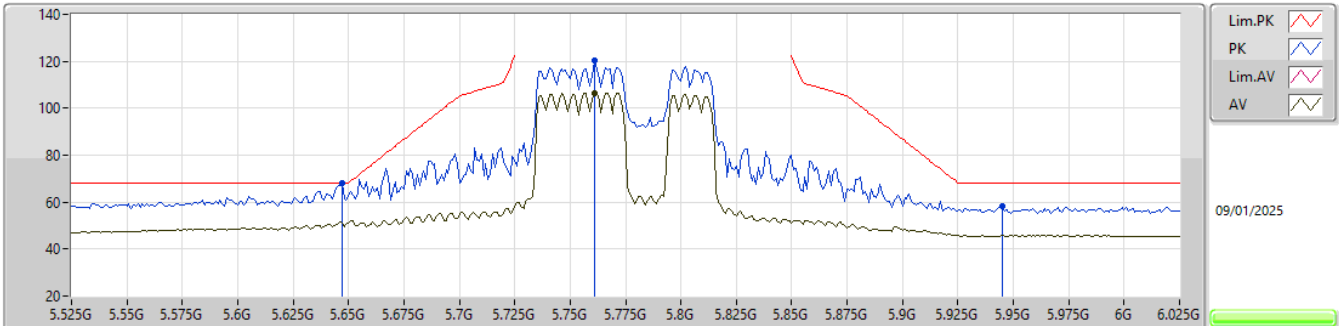


EUT_Z_4TX
Setting 48
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.64G	67.80	68.20	-0.40	63.28	3	Vertical	360	2.01	-	31.86	6.96	34.30				
PK	5.812G	117.86	Inf	-Inf	113.03	3	Vertical	360	2.01	-	32.12	7.19	34.48				
AV	5.762G	106.14	Inf	-Inf	101.34	3	Vertical	360	2.01	-	32.10	7.13	34.43				
PK	5.936G	58.29	68.20	-9.91	53.22	3	Vertical	360	2.01	-	32.40	7.28	34.61				

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

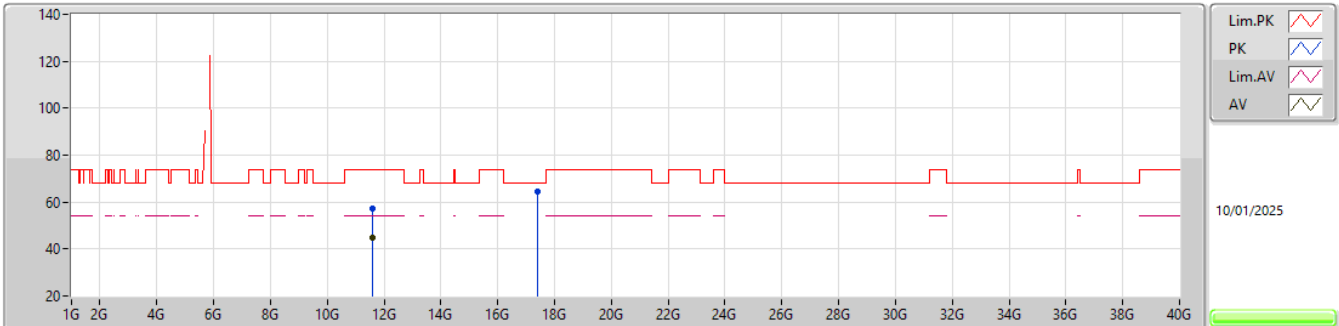
5775MHz_TX

EUT_Z_4TX
Setting 48
06-E-J-8-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.647G	68.02	68.20	-0.18	63.47	3	Horizontal	352	1.80	-	31.89	6.97	34.31				
PK	5.761G	120.13	Inf	-Inf	115.33	3	Horizontal	352	1.80	-	32.10	7.13	34.43				
AV	5.761G	106.43	Inf	-Inf	101.63	3	Horizontal	352	1.80	-	32.10	7.13	34.43				
PK	5.945G	58.25	68.20	-9.95	53.19	3	Horizontal	352	1.80	-	32.40	7.28	34.62				

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

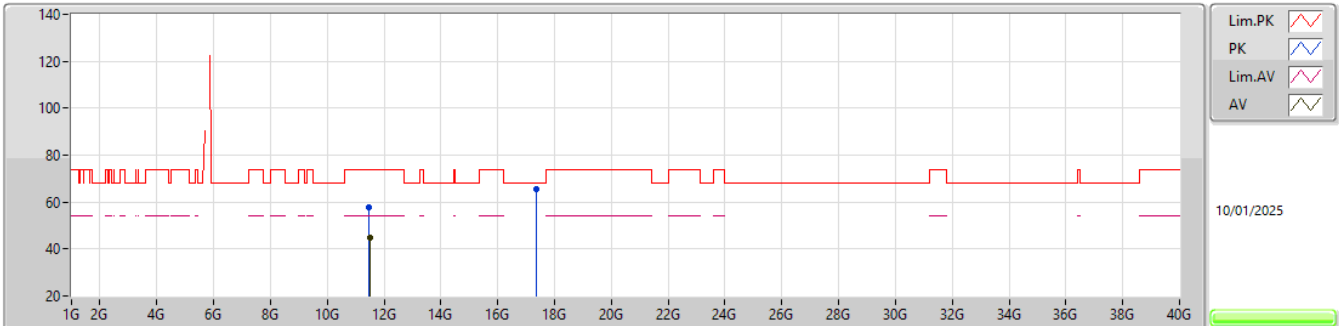
5775MHz_TX

EUT_Z_4TX
Setting 48
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.6085G	57.46	74.00	-16.54	40.87	3	Vertical	153	2.08	-	39.65	11.83	34.89			
AV	11.5759G	44.66	54.00	-9.34	27.98	3	Vertical	153	2.08	-	39.80	11.80	34.92			
PK	17.3832G	64.50	68.20	-3.70	42.86	3	Vertical	350	1.56	-	41.93	13.89	34.18			

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

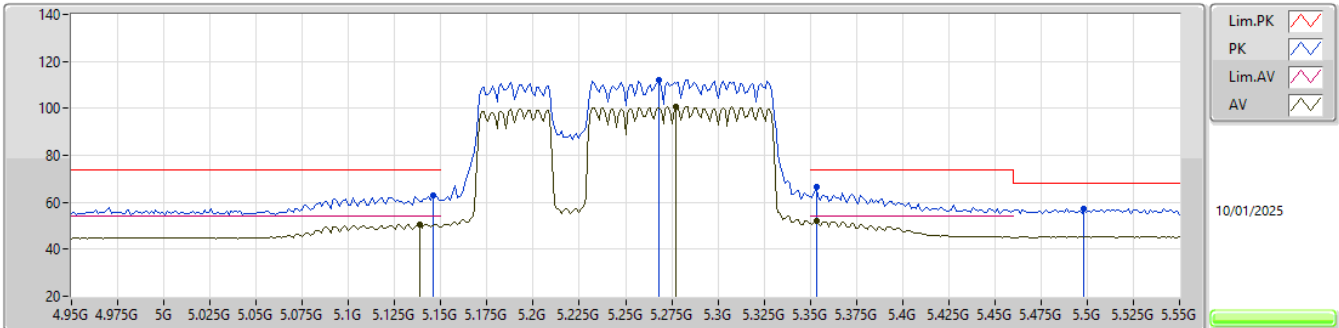
5775MHz_TX

EUT_Z_4TX
Setting 48
06-E-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.478G	58.01	74.00	-15.99	41.37	3	Horizontal	23	1.32	-	39.86	11.74	34.96			
AV	11.5087G	44.76	54.00	-9.24	28.08	3	Horizontal	23	1.32	-	39.90	11.76	34.98			
PK	17.3775G	65.71	68.20	-2.49	44.12	3	Horizontal	144	2.34	-	41.88	13.89	34.18			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

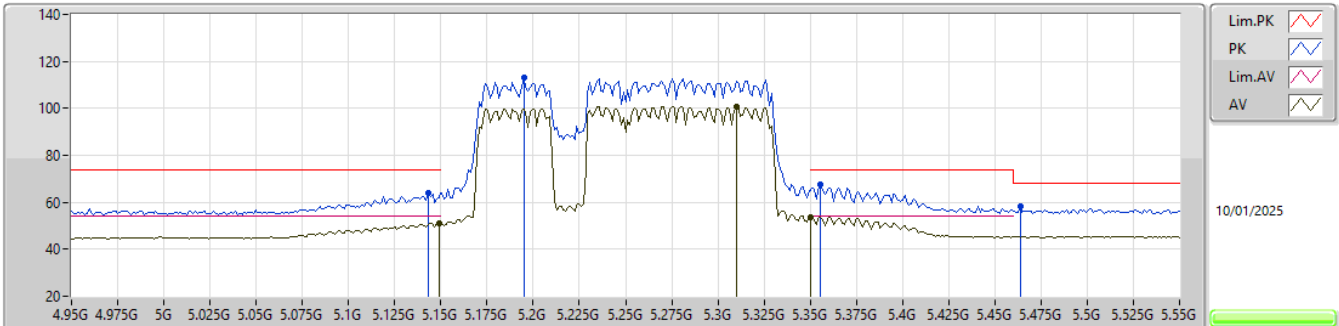


EUT_Z_4TX
Setting 41
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1456G	63.05	74.00	-10.95	58.34	3	Vertical	358	1.55	-	31.98	6.77	34.04
AV	5.1384G	50.48	54.00	-3.52	45.80	3	Vertical	358	1.55	-	31.95	6.76	34.03
PK	5.268G	112.29	Inf	-Inf	108.15	3	Vertical	358	1.55	-	31.36	6.86	34.08
AV	5.2776G	100.87	Inf	-Inf	96.75	3	Vertical	358	1.55	-	31.34	6.86	34.08
PK	5.3532G	66.42	74.00	-7.58	62.24	3	Vertical	358	1.55	-	31.41	6.87	34.10
AV	5.3532G	51.97	54.00	-2.03	47.79	3	Vertical	358	1.55	-	31.41	6.87	34.10
PK	5.4984G	57.39	68.20	-10.81	52.85	3	Vertical	358	1.55	-	31.80	6.89	34.15

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX

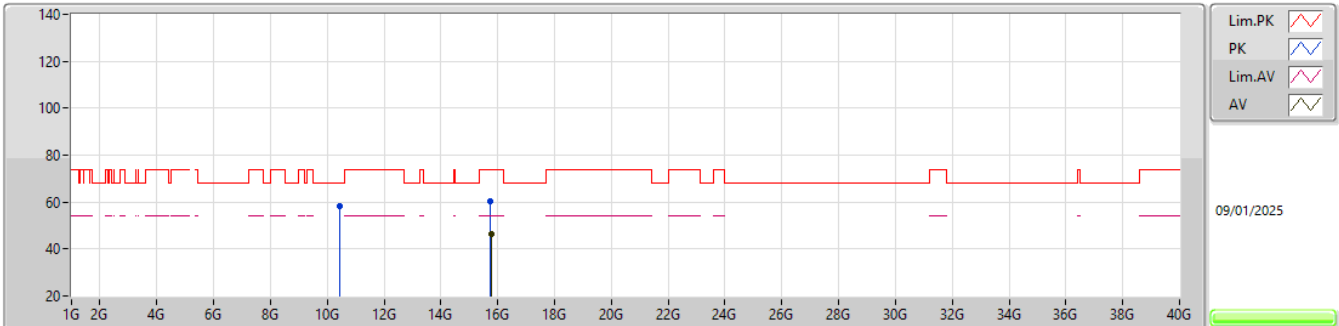
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 41
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1432G	64.09	74.00	-9.91	59.39	3	Horizontal	354	1.41	-	31.97	6.77	34.04
AV	5.1492G	51.25	54.00	-2.75	46.51	3	Horizontal	354	1.41	-	32.00	6.78	34.04
PK	5.1948G	113.35	Inf	-Inf	108.83	3	Horizontal	354	1.41	-	31.73	6.84	34.05
PK	5.3556G	67.78	74.00	-6.22	63.60	3	Horizontal	354	1.41	-	31.41	6.87	34.10
AV	5.31G	100.81	Inf	-Inf	96.71	3	Horizontal	354	1.41	-	31.32	6.87	34.09
AV	5.35G	53.76	54.00	-0.24	49.59	3	Horizontal	354	1.41	-	31.40	6.87	34.10
PK	5.4636G	58.20	68.20	-10.00	53.72	3	Horizontal	354	1.41	-	31.73	6.89	34.14

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX

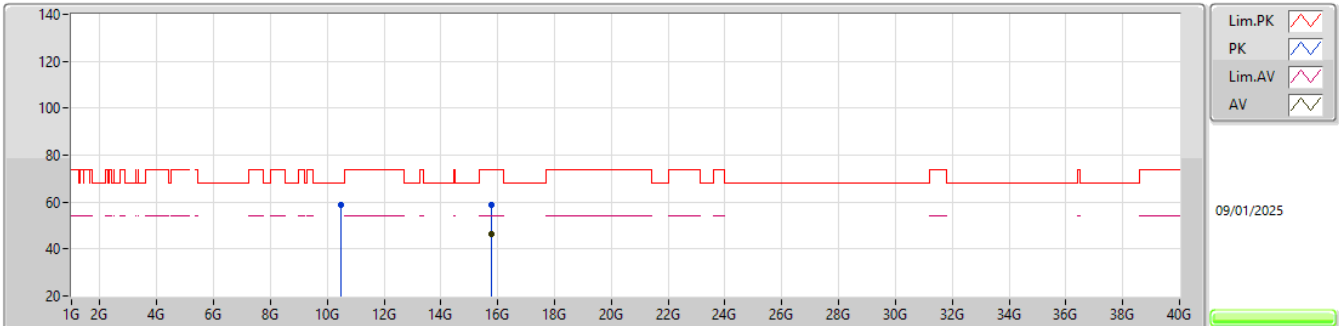
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 41
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4424G	58.47	68.20	-9.73	42.21	3	Vertical	264	1.74	-	39.68	11.07	34.49			
PK	15.7464G	60.17	74.00	-13.83	43.32	3	Vertical	301	1.95	-	37.79	13.24	34.18			
AV	15.7773G	46.42	54.00	-7.58	29.66	3	Vertical	301	1.95	-	37.69	13.26	34.19			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX

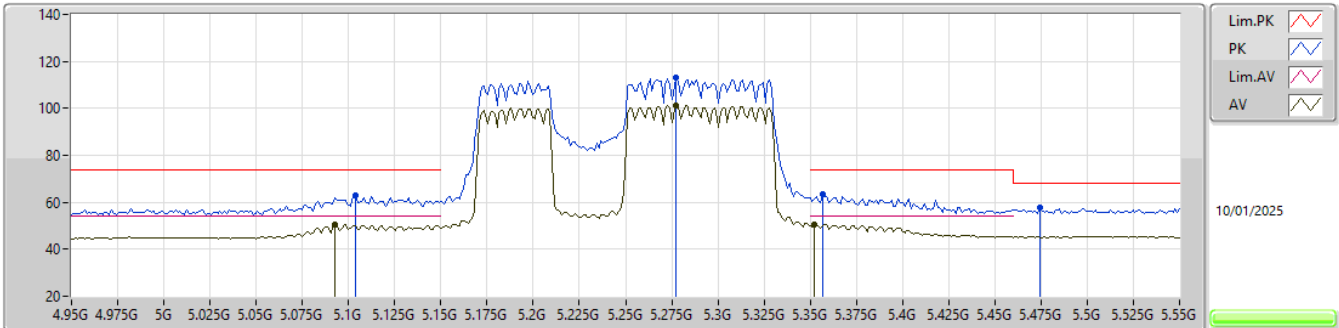
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 41
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.467G	58.62	68.20	-9.58	42.33	3	Horizontal	322	1.99	-	39.70	11.08	34.49			
PK	15.7833G	58.94	74.00	-15.06	42.19	3	Horizontal	314	2.92	-	37.67	13.27	34.19			
AV	15.7689G	46.63	54.00	-7.37	29.84	3	Horizontal	314	2.92	-	37.72	13.26	34.19			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

5250MHz Straddle 5.25-5.35GHz_TX

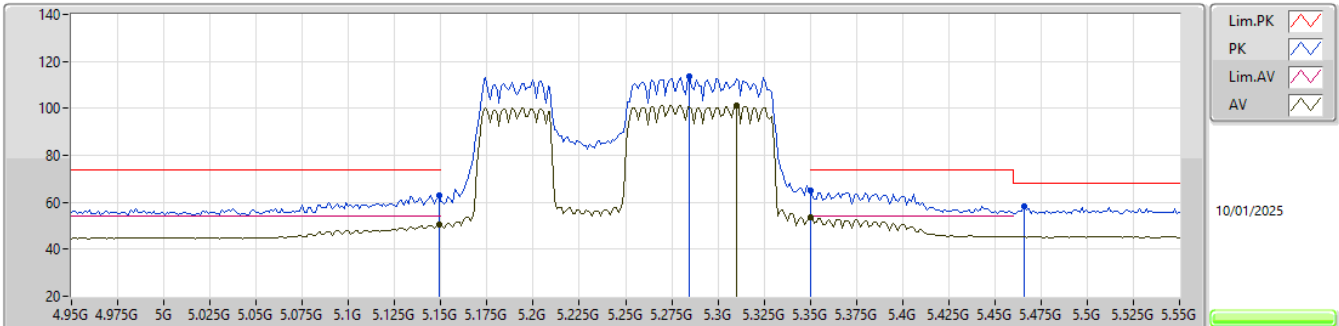


EUT_Z_4TX
Setting 40
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1036G	62.95	74.00	-11.05	58.45	3	Vertical	360	1.56	-	31.81	6.71	34.02
AV	5.0928G	50.45	54.00	-3.55	46.01	3	Vertical	360	1.56	-	31.77	6.69	34.02
PK	5.2776G	113.35	Inf	-Inf	109.23	3	Vertical	360	1.56	-	31.34	6.86	34.08
AV	5.2776G	101.24	Inf	-Inf	97.12	3	Vertical	360	1.56	-	31.34	6.86	34.08
PK	5.3568G	63.29	74.00	-10.71	59.11	3	Vertical	360	1.56	-	31.41	6.87	34.10
AV	5.352G	50.55	54.00	-3.45	46.38	3	Vertical	360	1.56	-	31.40	6.87	34.10
PK	5.4744G	57.58	68.20	-10.62	53.08	3	Vertical	360	1.56	-	31.75	6.89	34.14

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

5250MHz Straddle 5.25-5.35GHz_TX

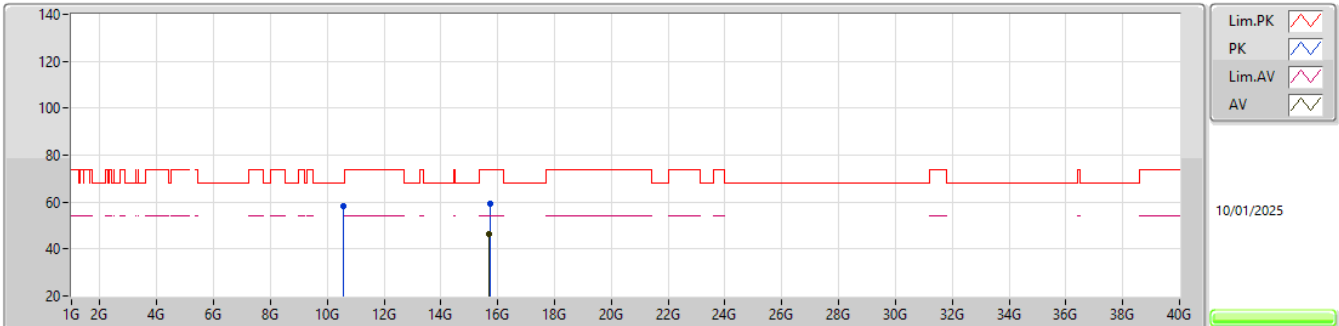


EUT_Z_4TX
Setting 40
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1492G	62.91	74.00	-11.09	58.17	3	Horizontal	349	1.45	-	32.00	6.78	34.04
AV	5.1492G	50.51	54.00	-3.49	45.77	3	Horizontal	349	1.45	-	32.00	6.78	34.04
PK	5.2848G	113.55	Inf	-Inf	109.44	3	Horizontal	349	1.45	-	31.33	6.86	34.08
AV	5.31G	101.09	Inf	-Inf	96.99	3	Horizontal	349	1.45	-	31.32	6.87	34.09
PK	5.35G	65.11	74.00	-8.89	60.94	3	Horizontal	349	1.45	-	31.40	6.87	34.10
AV	5.35G	53.69	54.00	-0.31	49.52	3	Horizontal	349	1.45	-	31.40	6.87	34.10
PK	5.466G	58.11	68.20	-10.09	53.63	3	Horizontal	349	1.45	-	31.73	6.89	34.14

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

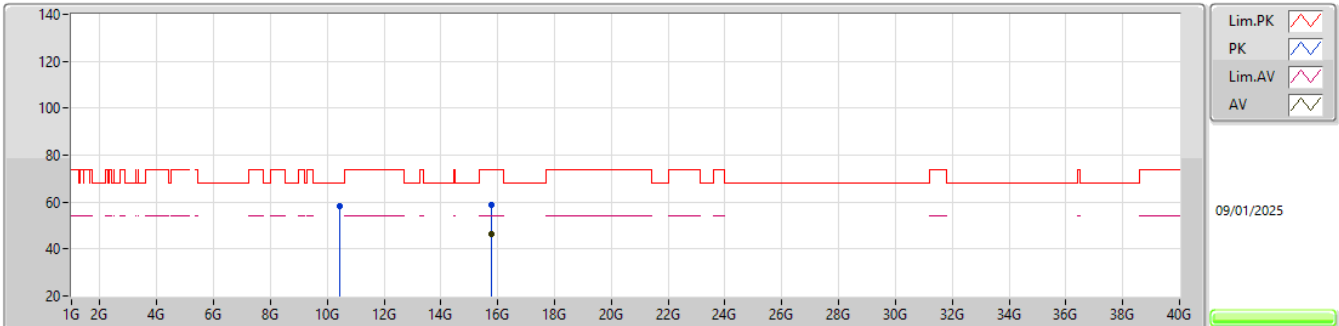
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 40
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5714G	58.44	68.20	-9.76	42.01	3	Vertical	342	2.86	-	39.74	11.15	34.46			
PK	15.716G	59.38	74.00	-14.62	42.60	3	Vertical	350	1.57	-	37.73	13.22	34.17			
AV	15.675G	46.23	54.00	-7.77	29.60	3	Vertical	350	1.57	-	37.60	13.19	34.16			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

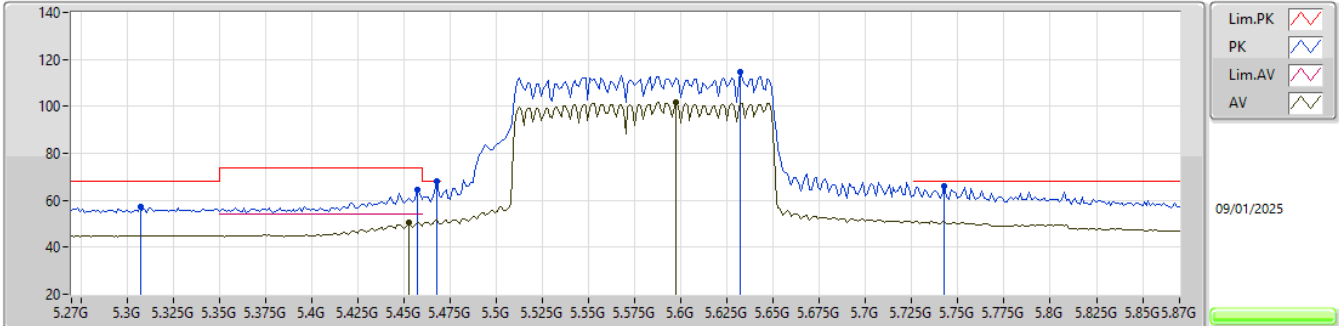
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 40
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.4256G	58.28	68.20	-9.92	42.06	3	Horizontal	284	2.79	-	39.65	11.06	34.49			
PK	15.7779G	58.89	74.00	-15.11	42.13	3	Horizontal	73	1.62	-	37.69	13.26	34.19			
AV	15.7731G	46.29	54.00	-7.71	29.51	3	Horizontal	73	1.62	-	37.71	13.26	34.19			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 1_4TX

5570MHz_TX

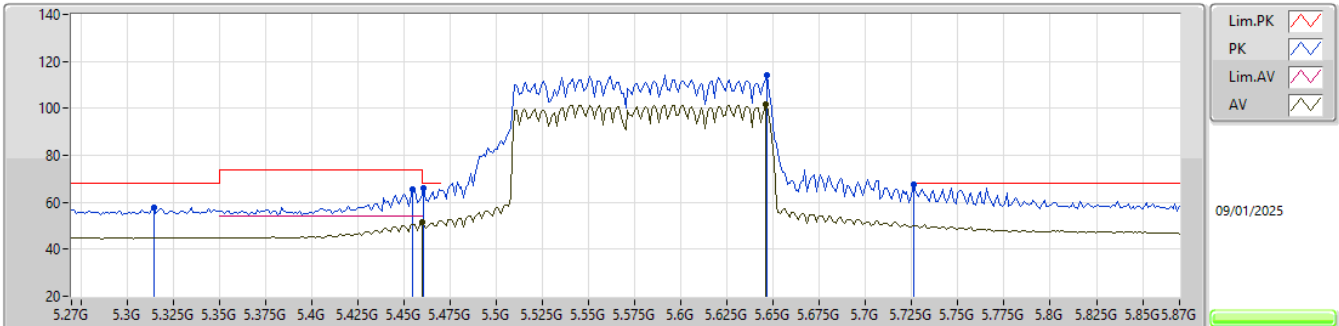


EUT_Z_4TX
Setting 45
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.3072G	57.01	68.20	-11.19	52.92	3	Vertical	360	1.93	-	31.31	6.87	34.09				
PK	5.4572G	64.27	74.00	-9.73	59.81	3	Vertical	360	1.93	-	31.71	6.89	34.14				
AV	5.4524G	50.68	54.00	-3.32	46.22	3	Vertical	360	1.93	-	31.70	6.89	34.13				
PK	5.468G	68.13	68.20	-0.07	63.64	3	Vertical	360	1.93	-	31.74	6.89	34.14				
PK	5.6324G	114.63	Inf	-Inf	110.14	3	Vertical	360	1.93	-	31.83	6.95	34.29				
AV	5.5976G	101.57	Inf	-Inf	97.21	3	Vertical	360	1.93	-	31.70	6.91	34.25				
PK	5.7428G	66.02	68.20	-2.18	61.23	3	Vertical	360	1.93	-	32.10	7.10	34.41				

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 1_4TX

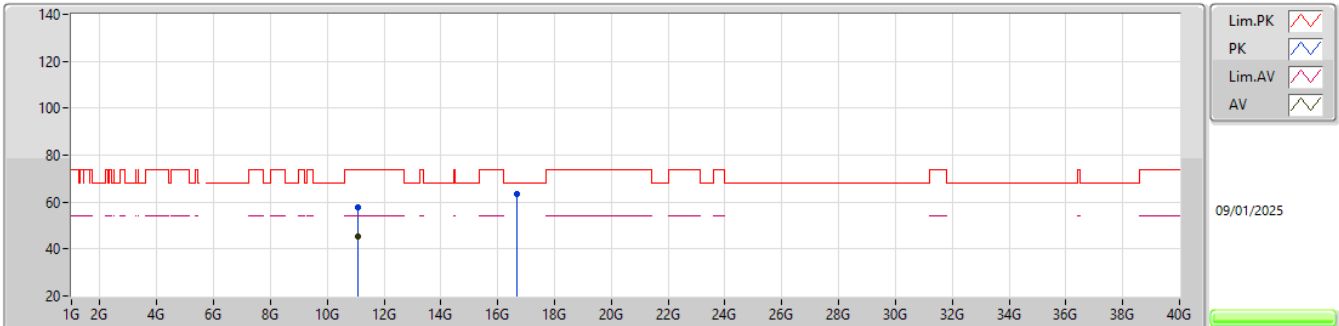
5570MHz_TX

EUT_Z_4TX
Setting 45
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3144G	58.00	68.20	-10.20	53.89	3	Horizontal	350	1.80	-	31.33	6.87	34.09
PK	5.4548G	65.54	74.00	-8.46	61.08	3	Horizontal	350	1.80	-	31.71	6.89	34.14
PK	5.4608G	66.05	68.20	-2.15	61.58	3	Horizontal	350	1.80	-	31.72	6.89	34.14
AV	5.4596G	51.33	54.00	-2.67	46.86	3	Horizontal	350	1.80	-	31.72	6.89	34.14
PK	5.6468G	114.16	Inf	-Inf	109.61	3	Horizontal	350	1.80	-	31.89	6.97	34.31
AV	5.6456G	101.69	Inf	-Inf	97.14	3	Horizontal	350	1.80	-	31.88	6.97	34.30
PK	5.726G	67.57	68.20	-0.63	62.78	3	Horizontal	350	1.80	-	32.10	7.08	34.39

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 1_4TX

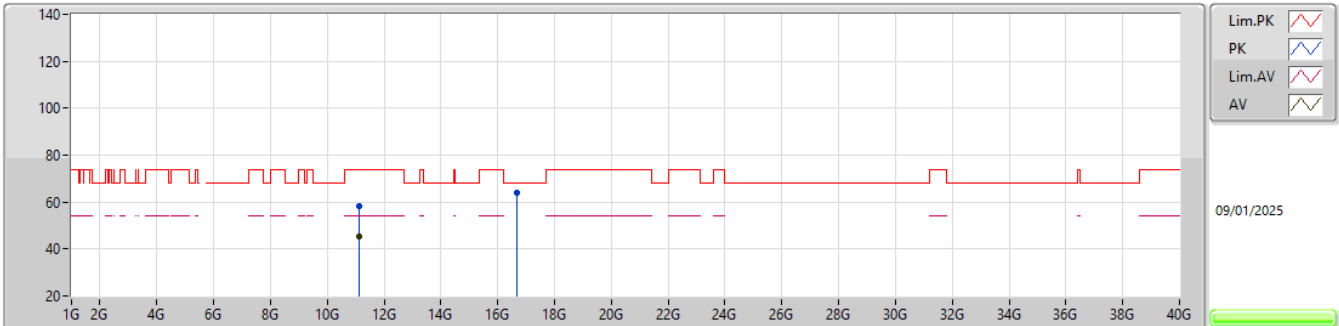
5570MHz_TX

EUT_Z_4TX
Setting 45
06-E-J-8

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	11.0758G	57.96	74.00	-16.04	40.91	3	Vertical	70	2.35	-	39.90	11.48	34.33			
AV	11.0749G	45.54	54.00	-8.46	28.49	3	Vertical	70	2.35	-	39.90	11.48	34.33			
PK	16.6887G	63.31	68.20	-4.89	44.23	3	Vertical	203	1.88	-	39.70	13.65	34.27			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 1_4TX

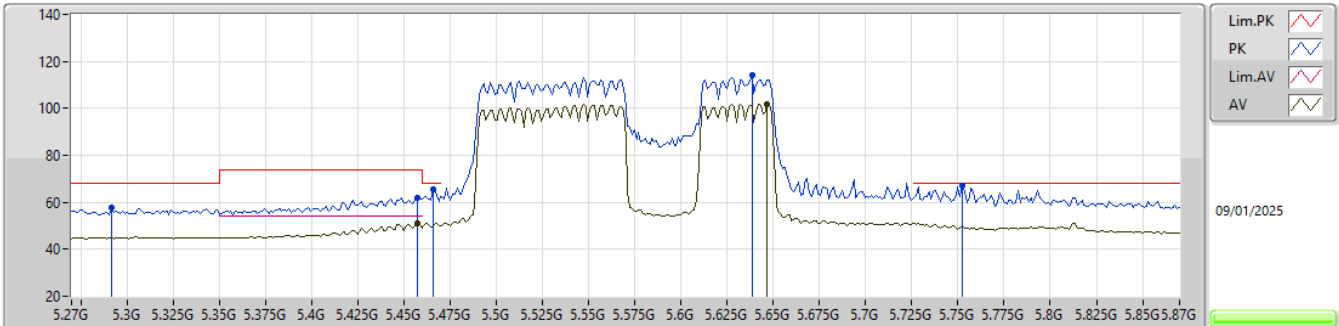
5570MHz_TX

EUT_Z_4TX
Setting 45
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1251G	58.33	74.00	-15.67	41.58	3	Horizontal	114	1.14	-	39.65	11.51	34.41			
AV	11.1302G	45.21	54.00	-8.79	28.49	3	Horizontal	114	1.14	-	39.62	11.51	34.41			
PK	16.6957G	63.80	68.20	-4.40	44.71	3	Horizontal	285	2.78	-	39.70	13.66	34.27			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

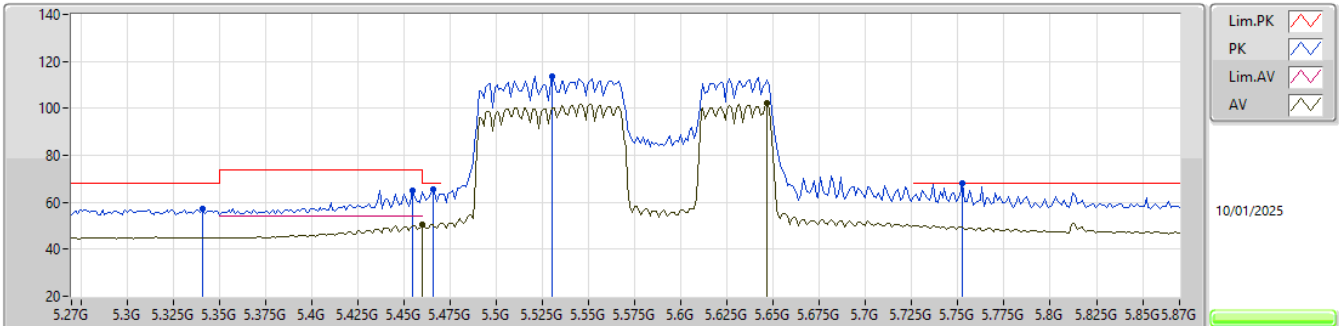
5570MHz_TX

EUT_Z_4TX
Setting 45
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.2916G	57.59	68.20	-10.61	53.49	3	Vertical	360.1	2.09	-	31.32	6.86	34.08
PK	5.4572G	61.98	74.00	-12.02	57.52	3	Vertical	360.1	2.09	-	31.71	6.89	34.14
AV	5.4572G	50.98	54.00	-3.02	46.52	3	Vertical	360.1	2.09	-	31.71	6.89	34.14
PK	5.4656G	65.46	68.20	-2.74	60.98	3	Vertical	360.1	2.09	-	31.73	6.89	34.14
PK	5.6384G	114.26	Inf	-Inf	109.75	3	Vertical	360.1	2.09	-	31.85	6.96	34.30
AV	5.6468G	101.83	Inf	-Inf	97.28	3	Vertical	360.1	2.09	-	31.89	6.97	34.31
PK	5.7524G	67.27	68.20	-0.93	62.47	3	Vertical	360.1	2.09	-	32.10	7.12	34.42

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

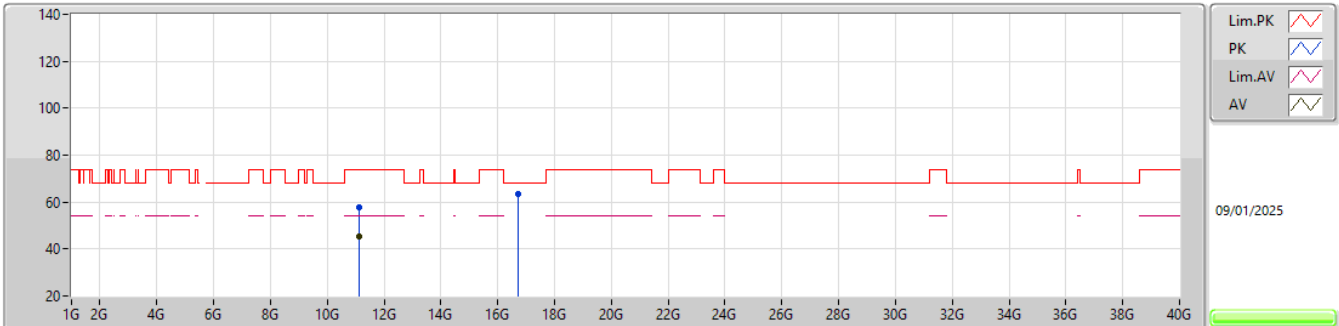
5570MHz_TX

EUT_Z_4TX
Setting 45
06-E-J-8-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.3408G	57.09	68.20	-11.11	52.94	3	Horizontal	353	1.80	-	31.38	6.87	34.10
PK	5.4548G	64.84	74.00	-9.16	60.38	3	Horizontal	353	1.80	-	31.71	6.89	34.14
AV	5.4596G	50.32	54.00	-3.68	45.85	3	Horizontal	353	1.80	-	31.72	6.89	34.14
PK	5.4656G	65.67	68.20	-2.53	61.19	3	Horizontal	353	1.80	-	31.73	6.89	34.14
PK	5.5304G	113.73	Inf	-Inf	109.21	3	Horizontal	353	1.80	-	31.80	6.90	34.18
PK	5.7524G	68.00	68.20	-0.20	63.20	3	Horizontal	353	1.80	-	32.10	7.12	34.42
AV	5.6468G	102.10	Inf	-Inf	97.55	3	Horizontal	353	1.80	-	31.89	6.97	34.31

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

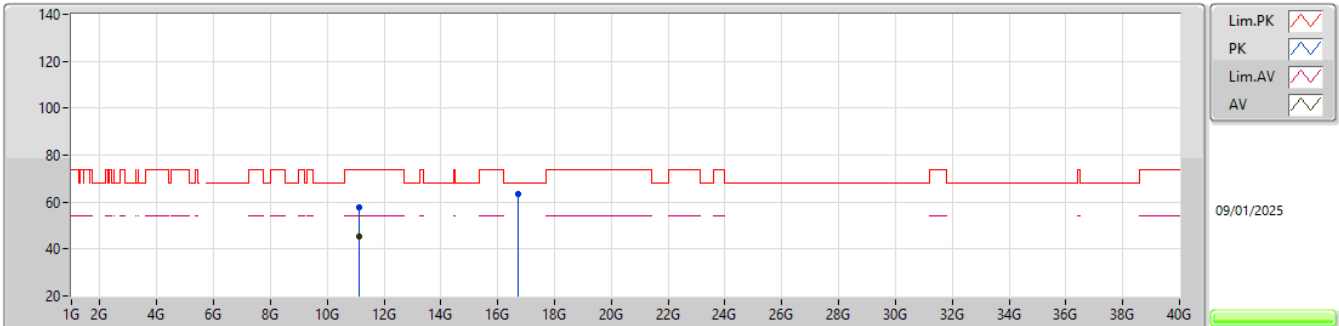
5570MHz_TX

EUT_Z_4TX
Setting 45
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.1264G	57.94	74.00	-16.06	41.20	3	Vertical	265	1.59	-	39.64	11.51	34.41			
AV	11.1265G	45.12	54.00	-8.88	28.38	3	Vertical	265	1.59	-	39.64	11.51	34.41			
PK	16.7083G	63.38	68.20	-4.82	44.24	3	Vertical	20	1.65	-	39.75	13.66	34.27			

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5570MHz_TX

EUT_Z_4TX
Setting 45
06-E-J-8

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	11.1389G	57.91	74.00	-16.09	41.25	3	Horizontal	43	2.75	-	39.57	11.52	34.43				
AV	11.1383G	45.11	54.00	-8.89	28.45	3	Horizontal	43	2.75	-	39.57	11.52	34.43				
PK	16.7045G	63.27	68.20	-4.93	44.15	3	Horizontal	21	2.50	-	39.73	13.66	34.27				



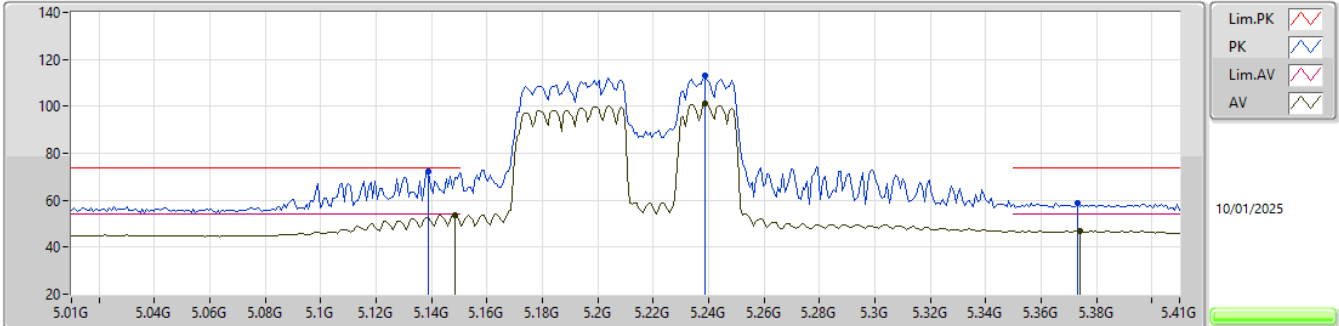
Test Mode: Mode 15

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX	Pass	AV	5.1476G	53.80	54.00	-0.20	3	Vertical	354	2.21	-

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

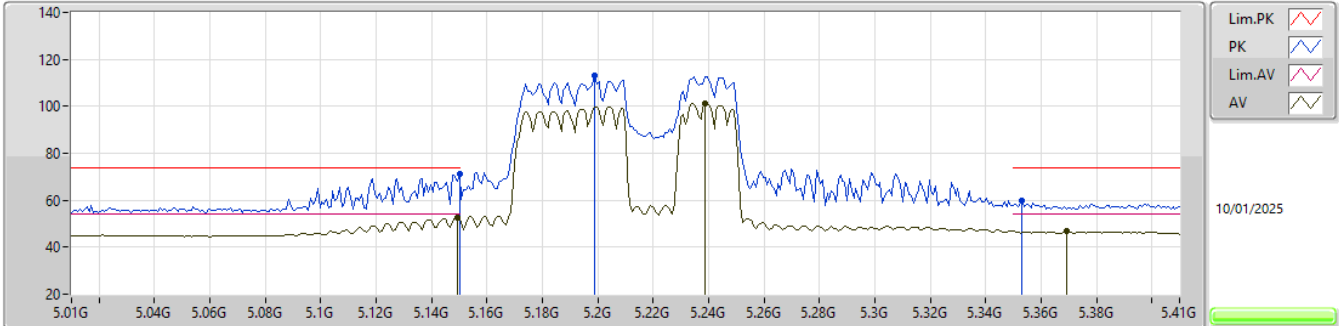


EUT_Z_4TX
Setting 33
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1388G	72.33	74.00	-1.67	67.64	3	Vertical	354	2.12	-	31.96	6.76	34.03
AV	5.1484G	53.76	54.00	-0.24	49.03	3	Vertical	354	2.12	-	31.99	6.78	34.04
PK	5.2388G	113.01	Inf	-Inf	108.75	3	Vertical	354	2.12	-	31.47	6.86	34.07
AV	5.2388G	101.08	Inf	-Inf	96.82	3	Vertical	354	2.12	-	31.47	6.86	34.07
PK	5.3732G	58.96	74.00	-15.04	54.74	3	Vertical	354	2.12	-	31.45	6.88	34.11
AV	5.374G	46.82	54.00	-7.18	42.60	3	Vertical	354	2.12	-	31.45	6.88	34.11

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

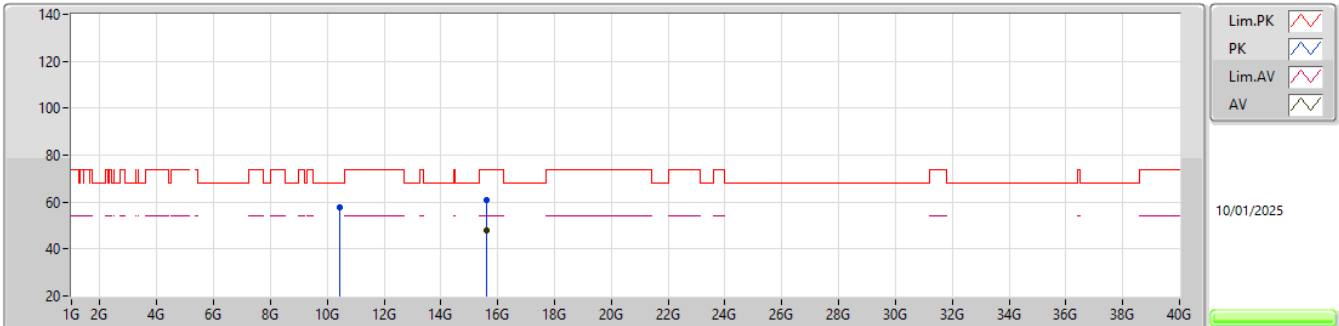
5210MHz_TX

EUT_Z_4TX
Setting 33
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.15G	71.27	74.00	-2.73	66.53	3	Horizontal	356	2.07	-	32.00	6.78	34.04
AV	5.1492G	52.71	54.00	-1.29	47.97	3	Horizontal	356	2.07	-	32.00	6.78	34.04
PK	5.1988G	112.85	Inf	-Inf	108.34	3	Horizontal	356	2.07	-	31.71	6.85	34.05
AV	5.2388G	101.30	Inf	-Inf	97.04	3	Horizontal	356	2.07	-	31.47	6.86	34.07
PK	5.3532G	59.77	74.00	-14.23	55.59	3	Horizontal	356	2.07	-	31.41	6.87	34.10
AV	5.3692G	46.75	54.00	-7.25	42.54	3	Horizontal	356	2.07	-	31.44	6.88	34.11

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

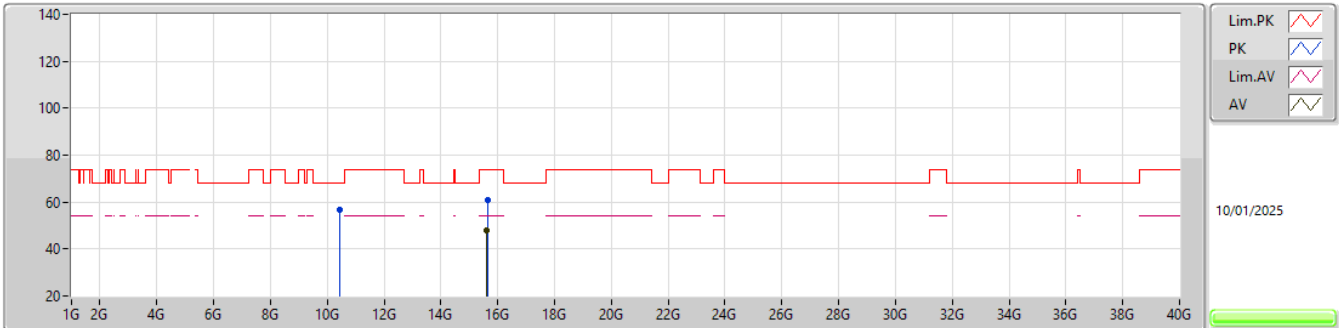
5210MHz_TX

EUT_Z_4TX
Setting 33
06-R-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42972G	57.86	68.20	-10.34	41.63	3	Vertical	88	2.22	-	39.66	11.06	34.49			
PK	15.61584G	61.08	74.00	-12.92	44.23	3	Vertical	277	1.86	-	37.84	13.15	34.14			
AV	15.61938G	48.02	54.00	-5.98	31.20	3	Vertical	277	1.86	-	37.81	13.15	34.14			

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

5210MHz_TX

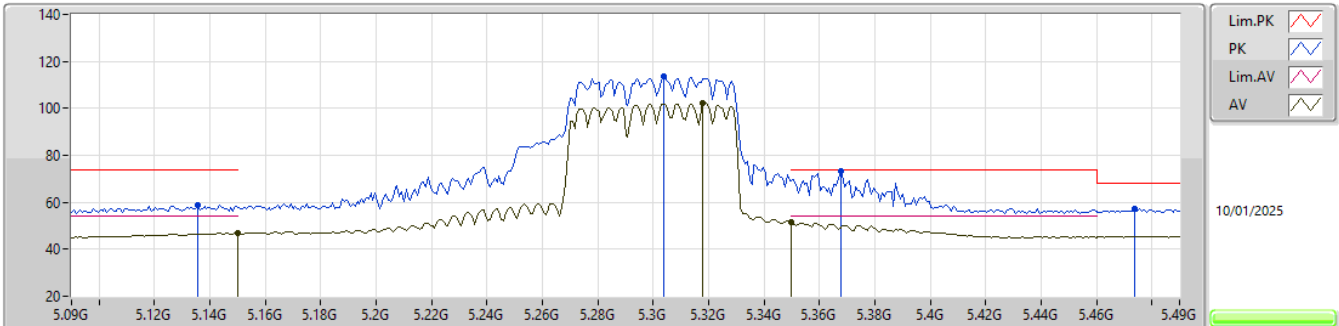


EUT_Z_4TX
Setting 33
06-R-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42G	56.97	68.20	-11.23	40.77	3	Horizontal	245	2.47	-	39.64	11.05	34.49			
PK	15.63114G	60.94	74.00	-13.06	44.24	3	Horizontal	43	2.67	-	37.69	13.16	34.15			
AV	15.61818G	48.18	54.00	-5.82	31.35	3	Horizontal	43	2.67	-	37.82	13.15	34.14			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

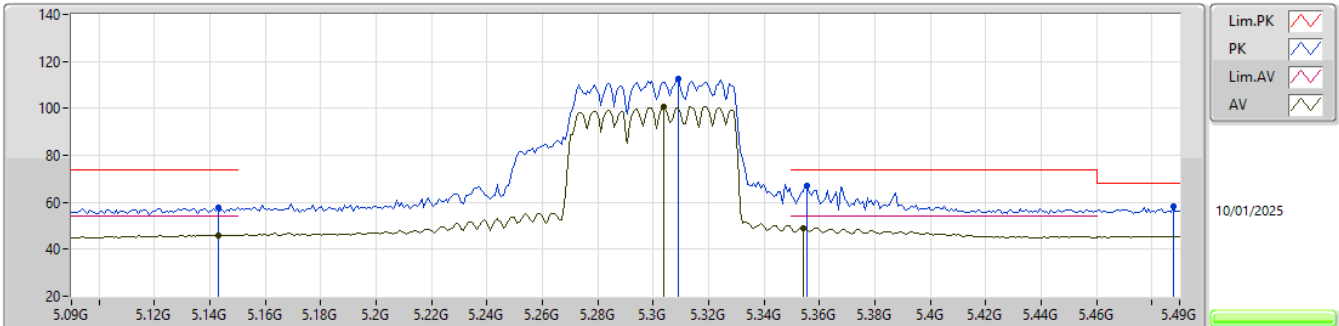
5290MHz_TX

EUT_Z_4TX
Setting 34
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1356G	58.70	74.00	-15.30	54.03	3	Vertical	355	2.23	-	31.94	6.76	34.03			
AV	5.15G	46.76	54.00	-7.24	42.02	3	Vertical	355	2.23	-	32.00	6.78	34.04			
PK	5.3036G	113.79	Inf	-Inf	109.70	3	Vertical	355	2.23	-	31.31	6.87	34.09			
AV	5.318G	102.02	Inf	-Inf	97.90	3	Vertical	355	2.23	-	31.34	6.87	34.09			
PK	5.3676G	73.15	74.00	-0.85	68.94	3	Vertical	355	2.23	-	31.44	6.88	34.11			
AV	5.35G	51.57	54.00	-2.43	47.40	3	Vertical	355	2.23	-	31.40	6.87	34.10			
PK	5.474G	57.22	68.20	-10.98	52.72	3	Vertical	355	2.23	-	31.75	6.89	34.14			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

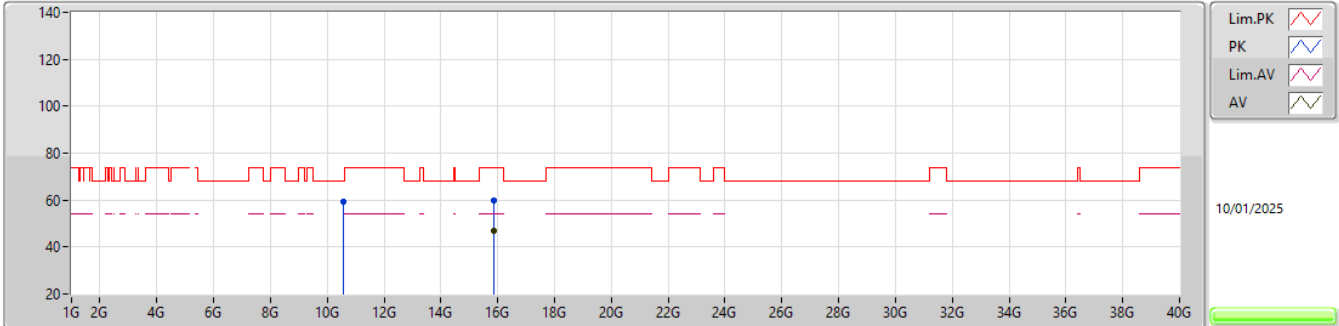
5290MHz_TX

EUT_Z_4TX
Setting 34
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1428G	57.82	74.00	-16.18	53.12	3	Horizontal	353	2.11	-	31.97	6.77	34.04			
AV	5.1428G	46.09	54.00	-7.91	41.39	3	Horizontal	353	2.11	-	31.97	6.77	34.04			
PK	5.3092G	112.47	Inf	-Inf	108.37	3	Horizontal	353	2.11	-	31.32	6.87	34.09			
AV	5.3036G	100.90	Inf	-Inf	96.81	3	Horizontal	353	2.11	-	31.31	6.87	34.09			
PK	5.3556G	66.95	74.00	-7.05	62.77	3	Horizontal	353	2.11	-	31.41	6.87	34.10			
AV	5.354G	49.20	54.00	-4.80	45.02	3	Horizontal	353	2.11	-	31.41	6.87	34.10			
PK	5.4876G	58.21	68.20	-9.99	53.69	3	Horizontal	353	2.11	-	31.78	6.89	34.15			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

5290MHz_TX

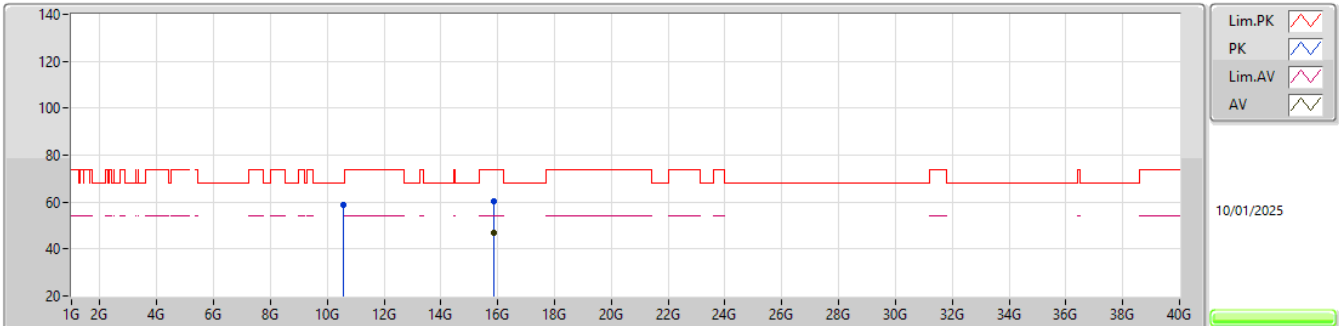


EUT_Z_4TX
Setting 34
06-R-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58366G	59.14	68.20	-9.06	42.66	3	Vertical	237	2.38	-	39.77	11.16	34.45			
PK	15.885G	60.08	74.00	-13.92	43.29	3	Vertical	209	2.57	-	37.67	13.34	34.22			
AV	15.88206G	46.96	54.00	-7.04	30.18	3	Vertical	209	2.57	-	37.66	13.34	34.22			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX

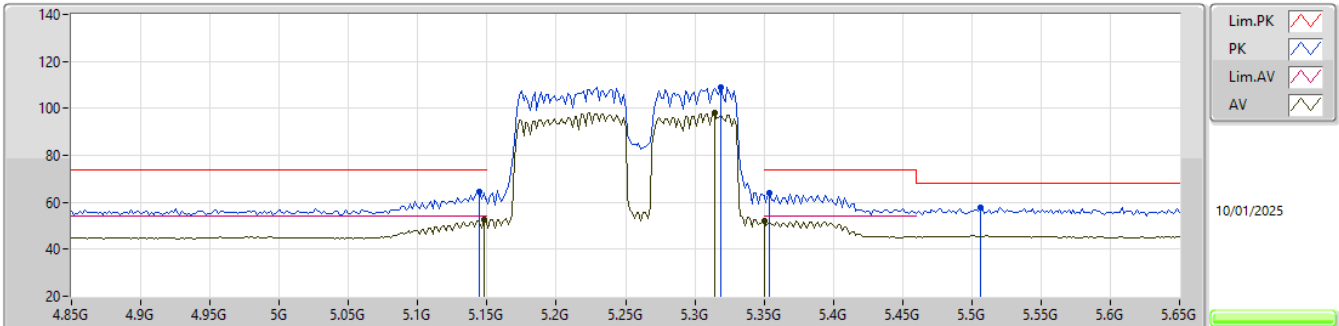
5290MHz_TX

EUT_Z_4TX
Setting 34
06-R-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.57154G	58.86	68.20	-9.34	42.43	3	Horizontal	71	2.25	-	39.74	11.15	34.46			
PK	15.8688G	60.32	74.00	-13.68	43.56	3	Horizontal	227	2.84	-	37.64	13.33	34.21			
AV	15.86268G	47.07	54.00	-6.93	30.33	3	Horizontal	227	2.84	-	37.63	13.32	34.21			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX

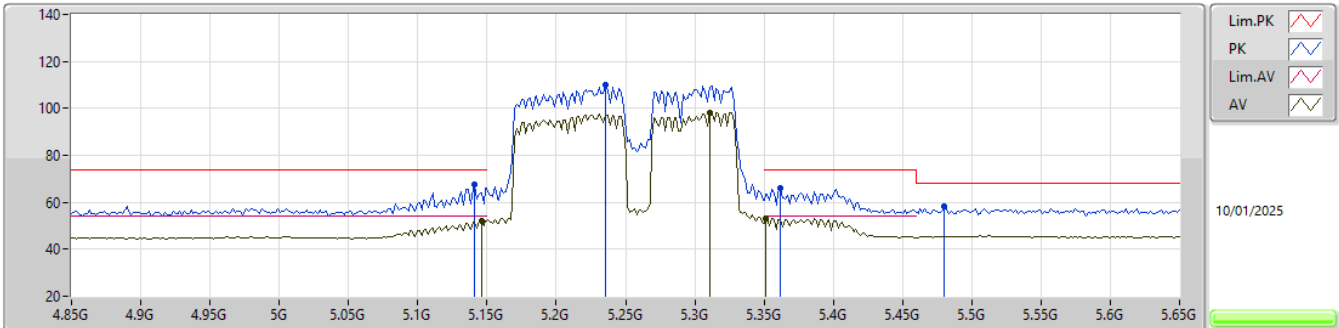
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 39
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1444G	64.56	74.00	-9.44	59.85	3	Vertical	351	2.02	-	31.98	6.77	34.04			
AV	5.1476G	52.40	54.00	-1.60	47.68	3	Vertical	351	2.02	-	31.99	6.77	34.04			
PK	5.3188G	109.14	Inf	-Inf	105.02	3	Vertical	351	2.02	-	31.34	6.87	34.09			
AV	5.314G	97.89	Inf	-Inf	93.78	3	Vertical	351	2.02	-	31.33	6.87	34.09			
PK	5.354G	64.03	74.00	-9.97	59.85	3	Vertical	351	2.02	-	31.41	6.87	34.10			
AV	5.35G	51.97	54.00	-2.03	47.80	3	Vertical	351	2.02	-	31.40	6.87	34.10			
PK	5.506G	57.80	68.20	-10.40	53.26	3	Vertical	351	2.02	-	31.80	6.90	34.16			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX

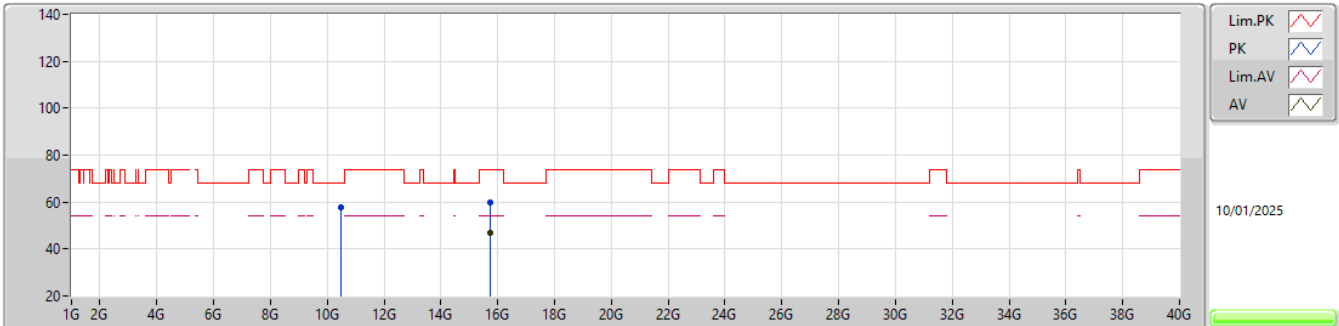
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 39
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1412G	67.40	74.00	-6.60	62.72	3	Horizontal	360.3	2.13	-	31.96	6.76	34.04				
AV	5.146G	52.26	54.00	-1.74	47.55	3	Horizontal	360.3	2.13	-	31.98	6.77	34.04				
PK	5.2356G	110.03	Inf	-Inf	105.75	3	Horizontal	360.3	2.13	-	31.49	6.86	34.07				
PK	5.362G	66.23	74.00	-7.77	62.05	3	Horizontal	360.3	2.13	-	31.42	6.87	34.11				
AV	5.3108G	98.14	Inf	-Inf	94.04	3	Horizontal	360.3	2.13	-	31.32	6.87	34.09				
AV	5.3508G	53.28	54.00	-0.72	49.11	3	Horizontal	360.3	2.13	-	31.40	6.87	34.10				
PK	5.4804G	58.35	68.20	-9.85	53.84	3	Horizontal	360.3	2.13	-	31.76	6.89	34.14				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX

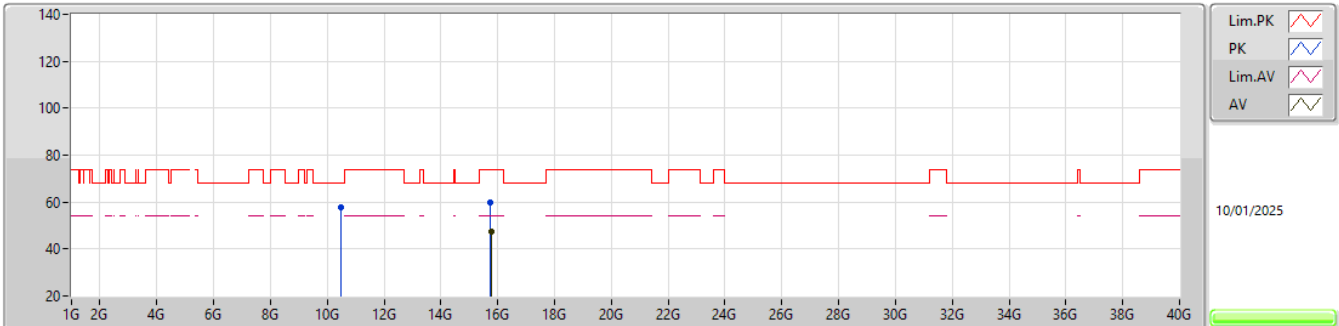
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 39
06-R-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49016G	57.82	68.20	-10.38	41.52	3	Vertical	161	1.97	-	39.70	11.10	34.50			
PK	15.75696G	59.69	74.00	-14.31	42.85	3	Vertical	133	2.75	-	37.77	13.25	34.18			
AV	15.73914G	47.13	54.00	-6.87	30.29	3	Vertical	133	2.75	-	37.78	13.24	34.18			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 5_4TX

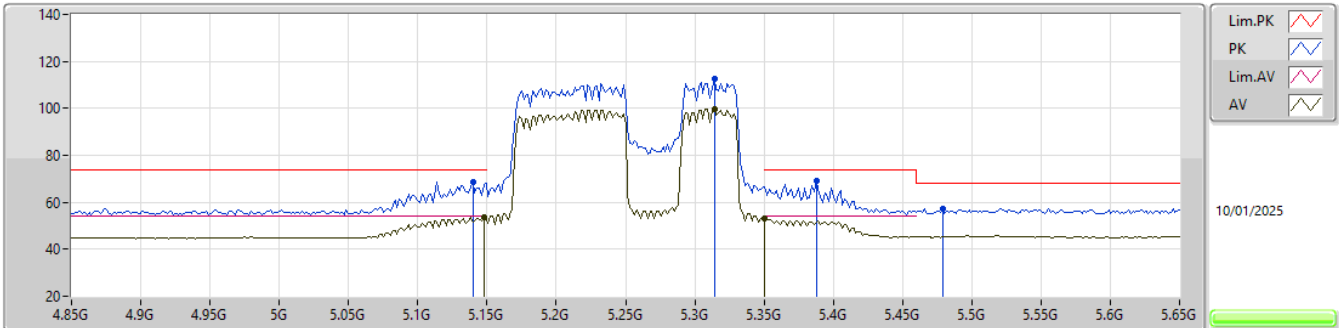
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 39
06-R-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49196G	57.71	68.20	-10.49	41.41	3	Horizontal	104	1.59	-	39.70	11.10	34.50			
PK	15.7407G	59.98	74.00	-14.02	43.14	3	Horizontal	358	2.11	-	37.78	13.24	34.18			
AV	15.75978G	47.21	54.00	-6.79	30.38	3	Horizontal	358	2.11	-	37.76	13.25	34.18			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

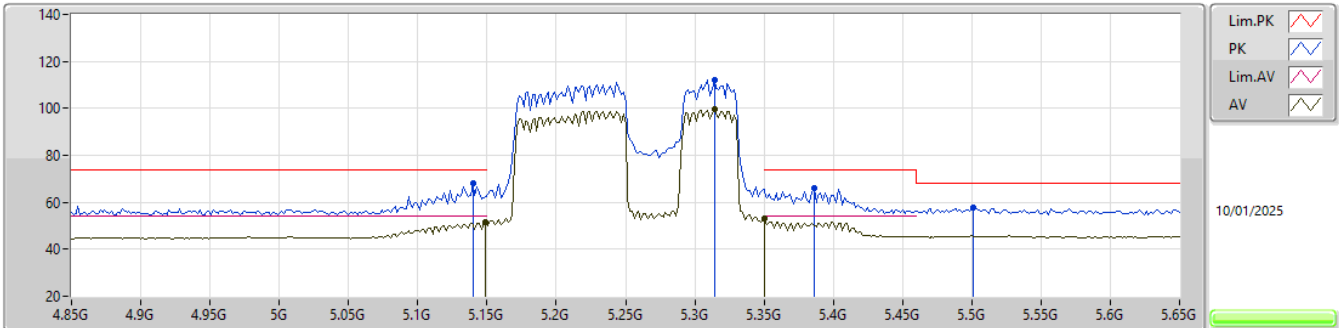


EUT_Z_4TX
Setting 39
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1396G	68.83	74.00	-5.17	64.14	3	Vertical	354	2.21	-	31.96	6.76	34.03			
AV	5.1476G	53.80	54.00	-0.20	49.08	3	Vertical	354	2.21	-	31.99	6.77	34.04			
PK	5.314G	112.81	Inf	-Inf	108.70	3	Vertical	354	2.21	-	31.33	6.87	34.09			
AV	5.314G	99.83	Inf	-Inf	95.72	3	Vertical	354	2.21	-	31.33	6.87	34.09			
AV	5.35G	53.34	54.00	-0.66	49.17	3	Vertical	354	2.21	-	31.40	6.87	34.10			
PK	5.3876G	69.16	74.00	-4.84	64.91	3	Vertical	354	2.21	-	31.48	6.88	34.11			
PK	5.4788G	57.50	68.20	-10.70	52.99	3	Vertical	354	2.21	-	31.76	6.89	34.14			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

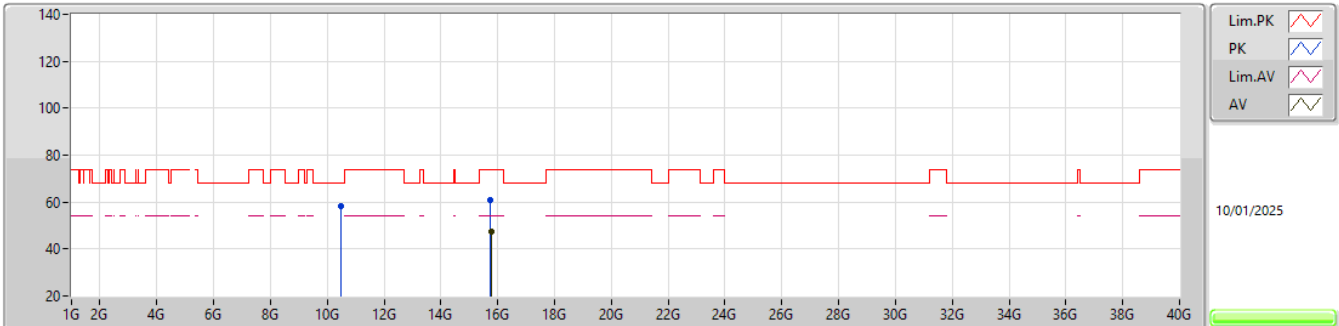
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 39
06-R-Y-1-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1396G	67.97	74.00	-6.03	63.28	3	Horizontal	354	2.08	-	31.96	6.76	34.03				
AV	5.1492G	51.68	54.00	-2.32	46.94	3	Horizontal	354	2.08	-	32.00	6.78	34.04				
PK	5.314G	111.87	Inf	-Inf	107.76	3	Horizontal	354	2.08	-	31.33	6.87	34.09				
AV	5.314G	99.54	Inf	-Inf	95.43	3	Horizontal	354	2.08	-	31.33	6.87	34.09				
AV	5.35G	52.85	54.00	-1.15	48.68	3	Horizontal	354	2.08	-	31.40	6.87	34.10				
PK	5.386G	65.95	74.00	-8.05	61.71	3	Horizontal	354	2.08	-	31.47	6.88	34.11				
PK	5.5012G	57.84	68.20	-10.36	53.29	3	Horizontal	354	2.08	-	31.80	6.90	34.15				

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

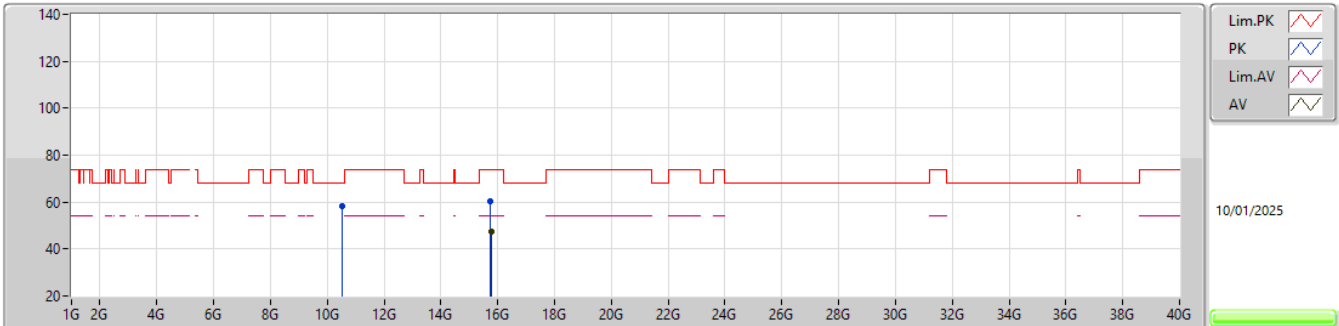
5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 39
06-R-Y-1

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.49808G	58.09	68.20	-10.11	41.79	3	Vertical	215	1.80	-	39.70	11.10	34.50			
PK	15.74052G	60.73	74.00	-13.27	43.89	3	Vertical	354	1.80	-	37.78	13.24	34.18			
AV	15.76044G	47.42	54.00	-6.58	30.59	3	Vertical	354	1.80	-	37.76	13.25	34.18			

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX

5250MHz Straddle 5.25-5.35GHz_TX

EUT_Z_4TX
Setting 39
06-R-Y-1

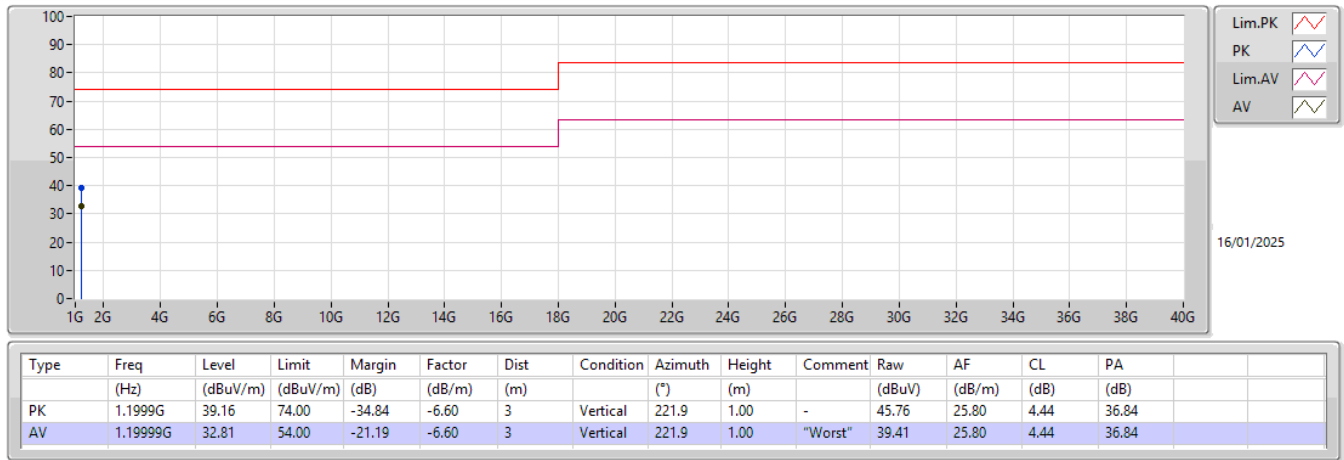
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5084G	58.11	68.20	-10.09	41.80	3	Horizontal	281	2.96	-	39.70	11.11	34.50			
PK	15.74676G	60.47	74.00	-13.53	43.62	3	Horizontal	108	1.80	-	37.79	13.24	34.18			
AV	15.76278G	47.36	54.00	-6.64	30.54	3	Horizontal	108	1.80	-	37.75	13.25	34.18			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 4	Pass	AV	1.19998G	34.64	54.00	-19.36	Horizontal

Mode 4



Mode 4

