

Appendix A(Radiated Spurious Emissions Above 1GHz Test Result)

Test Result

1GHz-40GHz

Environmental Conditions


Temperature:	23.6 to 24.6 °C
Relative Humidity:	51 to 55 %
ATM Pressure:	99.7 to 100.1 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-06-13 to 2025-07-29
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note 1: Choose the adapter for testing.

Note 2: For 18GHz-40GHz, the maximum output power mode and channel: 802.11a High Channel 5825MHz was tested.


802.11a Low Channel 1GHz-6.6GHz_HORIZONTAL

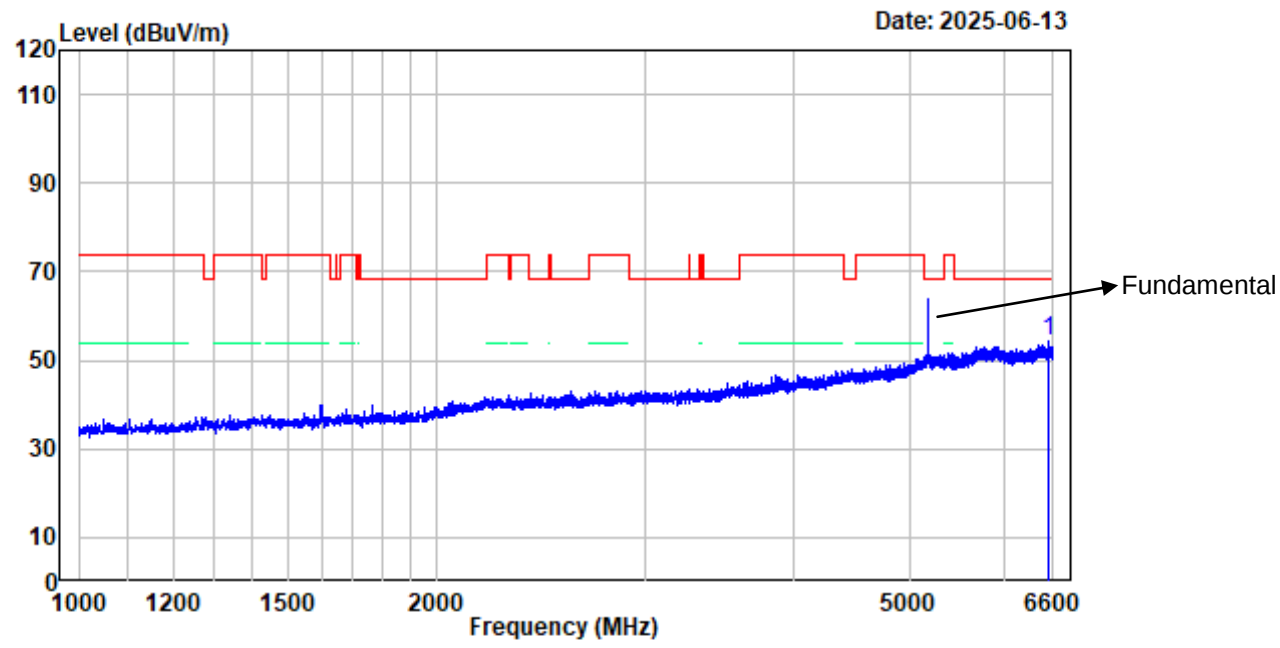

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6541.200	-3.74	57.86	54.12	68.20	-14.08 peak


802.11a Low Channel 1GHz-6.6GHz_VERTICAL

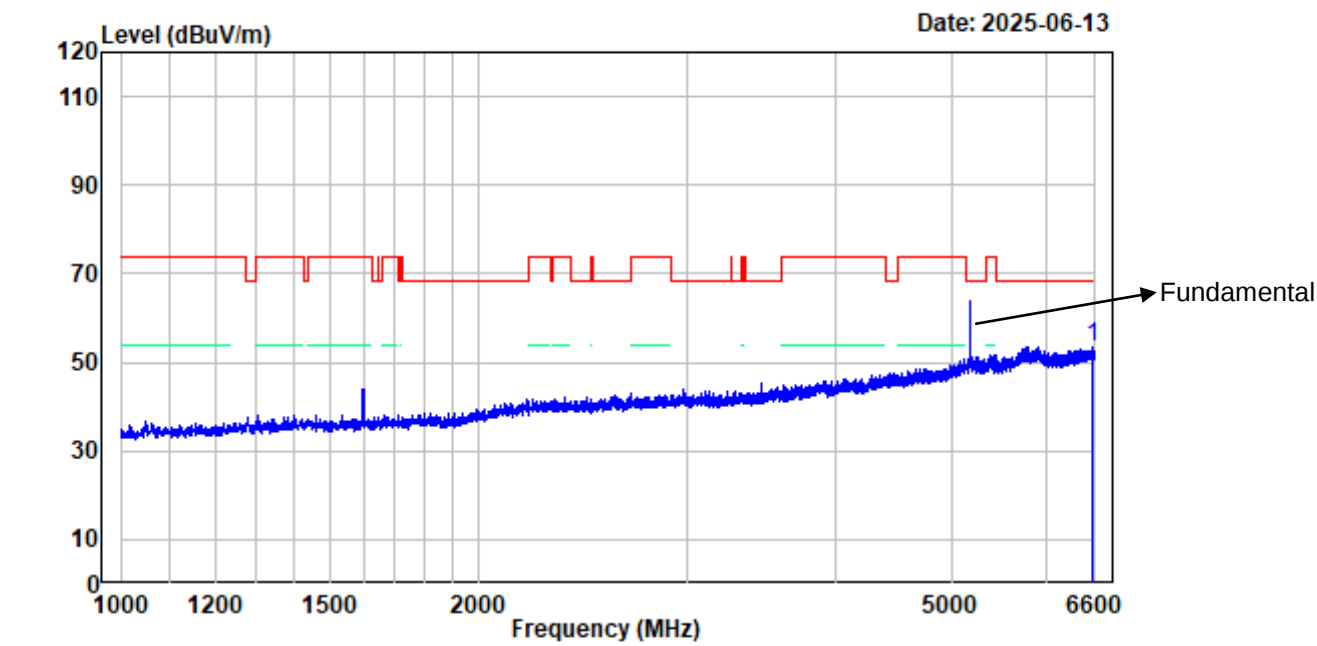

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6558.000	-3.69	56.90	53.21	68.20	-14.99 peak


802.11a Low Channel 6.6GHz-18GHz_HORIZONTAL

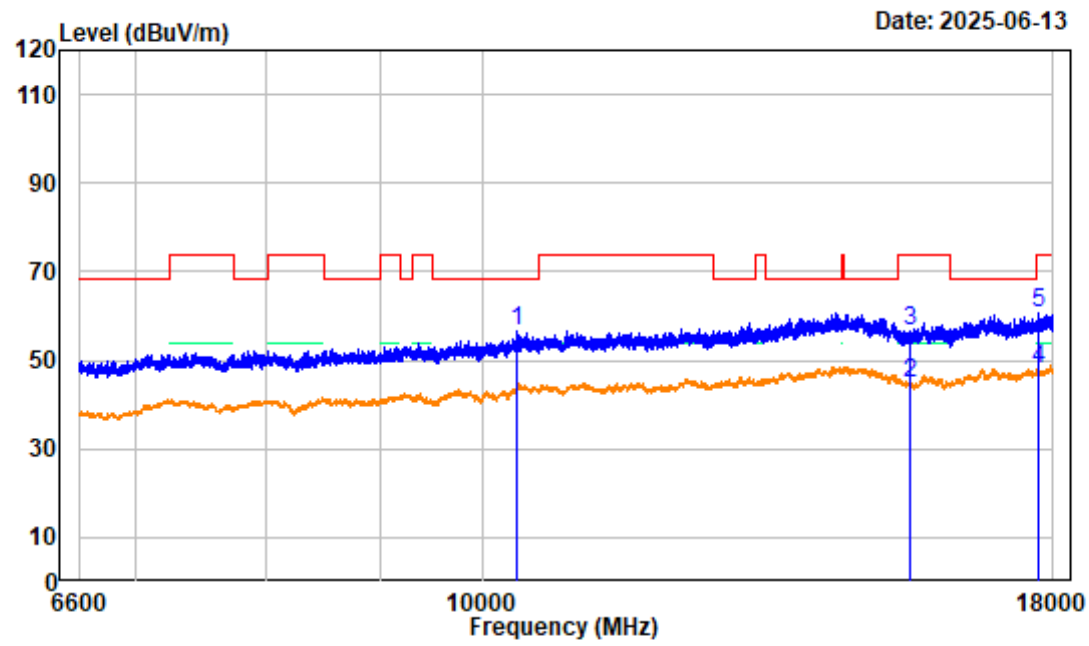

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.84	52.69	56.53	68.20	-11.67	peak
2 15540.000	4.75	39.90	44.65	54.00	-9.35	average
3 15540.000	4.75	51.89	56.64	74.00	-17.36	peak
4 17739.220	7.70	40.12	47.82	54.00	-6.18	average
5 17739.220	7.70	53.20	60.90	74.00	-13.10	peak


802.11a Low Channel 6.6GHz-18GHz_VERTICAL

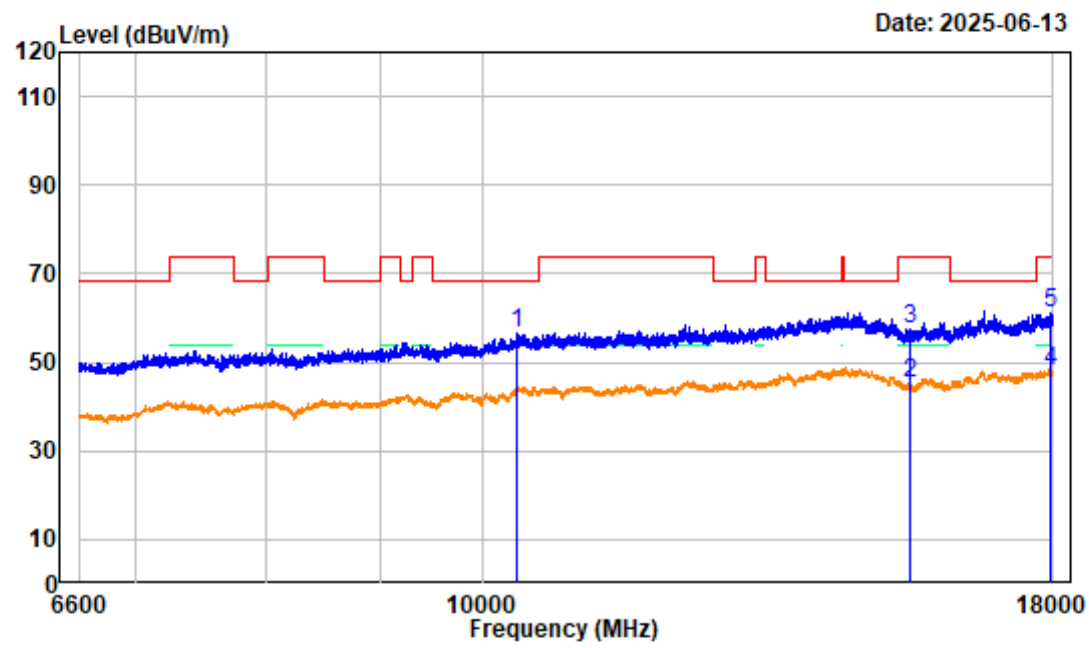

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.84	52.64	56.48	68.20	-11.72	peak
2 15540.000	4.75	40.71	45.46	54.00	-8.54	average
3 15540.000	4.75	52.70	57.45	74.00	-16.55	peak
4 17960.100	8.21	39.57	47.78	54.00	-6.22	average
5 17960.100	8.21	52.79	61.00	74.00	-13.00	peak


802.11a Low Channel Bandedge_HORIZONTAL

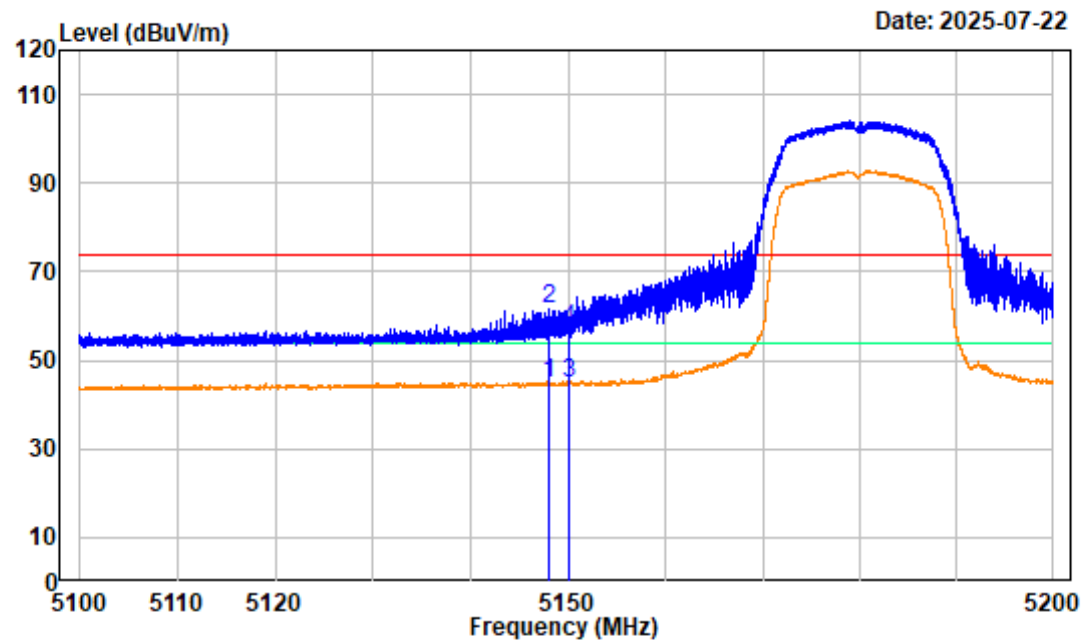

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.950	-5.99	50.75	44.76	54.00	-9.24	Average
2	5147.950	-5.99	67.76	61.77	74.00	-12.23	Peak
3	5150.000	-5.99	50.76	44.77	54.00	-9.23	average
4	5150.000	-5.99	63.11	57.12	74.00	-16.88	peak

802.11a Low Channel Bandedge_VERTICAL

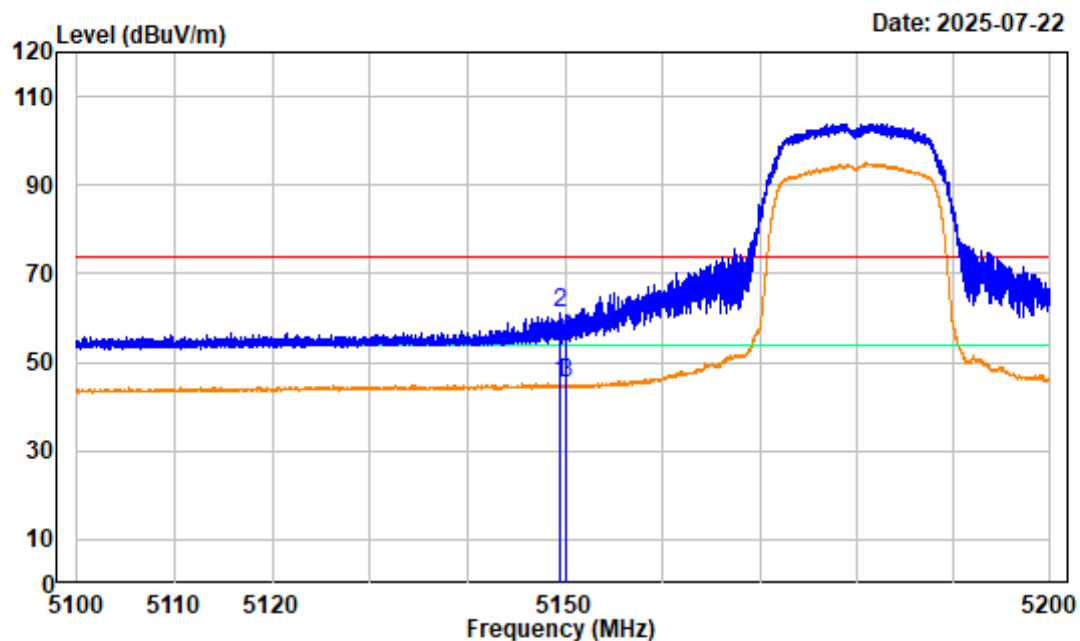

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11a Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.362	-5.99	51.09	45.10	54.00	-8.90	Average
2	5149.362	-5.99	67.16	61.17	74.00	-12.83	Peak
3	5150.000	-5.99	51.16	45.17	54.00	-8.83	average
4	5150.000	-5.99	61.35	55.36	74.00	-18.64	peak


802.11a Middle Channel 1GHz-6.6GHz_HORIZONTAL

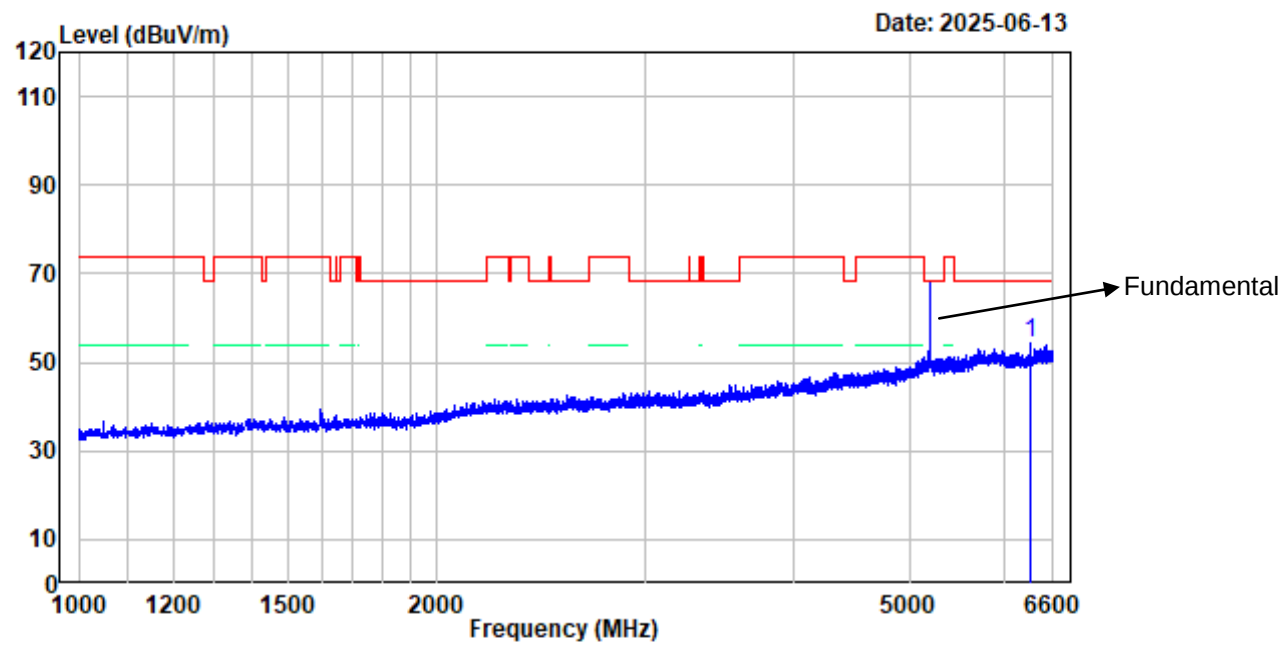

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6326.300	-4.46	58.62	54.16	68.20	-14.04 peak


802.11a Middle Channel 1GHz-6.6GHz_VERTICAL

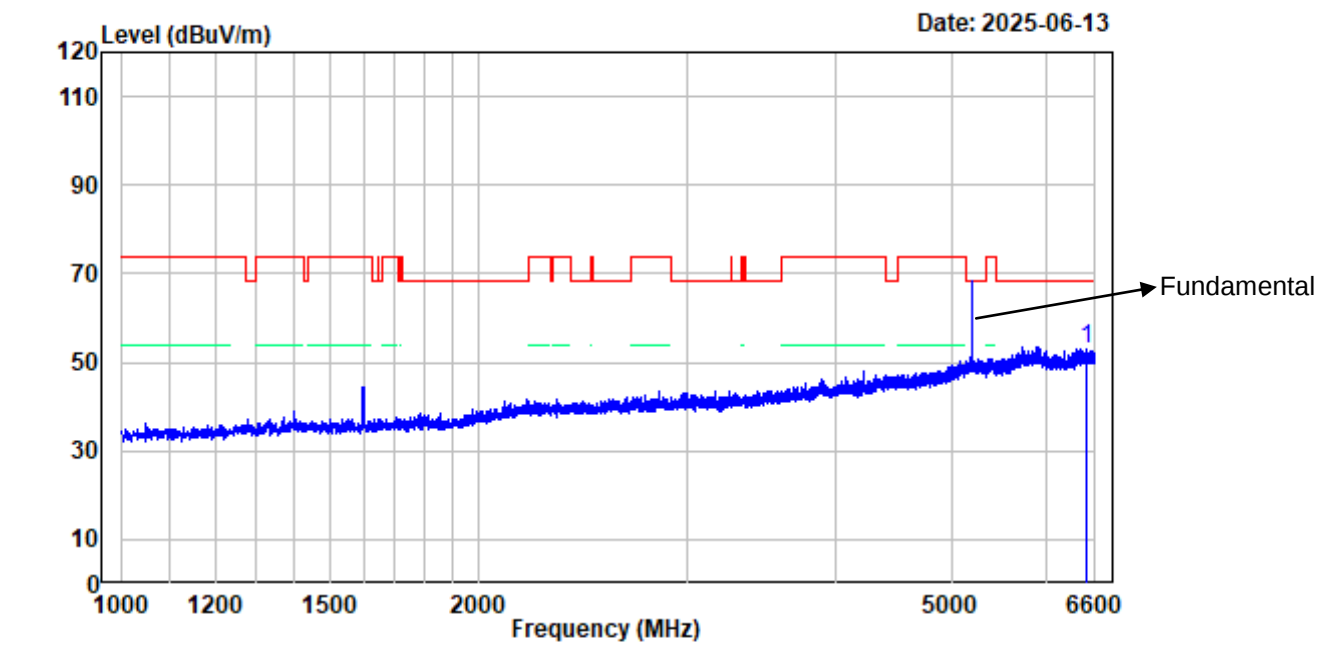

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6503.400	-3.81	56.86	53.05	68.20	-15.15 peak


802.11a Middle Channel 6.6GHz-18GHz_HORIZONTAL

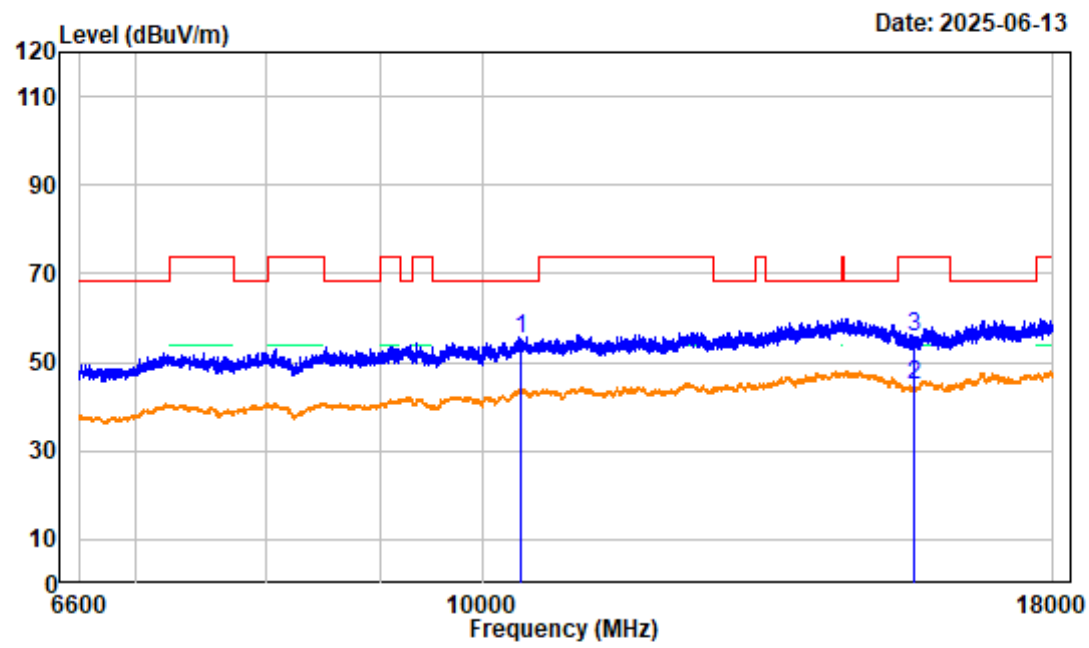

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.10	51.21	55.31	68.20	-12.89	peak
2 15600.000	4.60	40.03	44.63	54.00	-9.37	average
3 15600.000	4.60	51.07	55.67	74.00	-18.33	peak


802.11a Middle Channel 6.6GHz-18GHz_VERTICAL

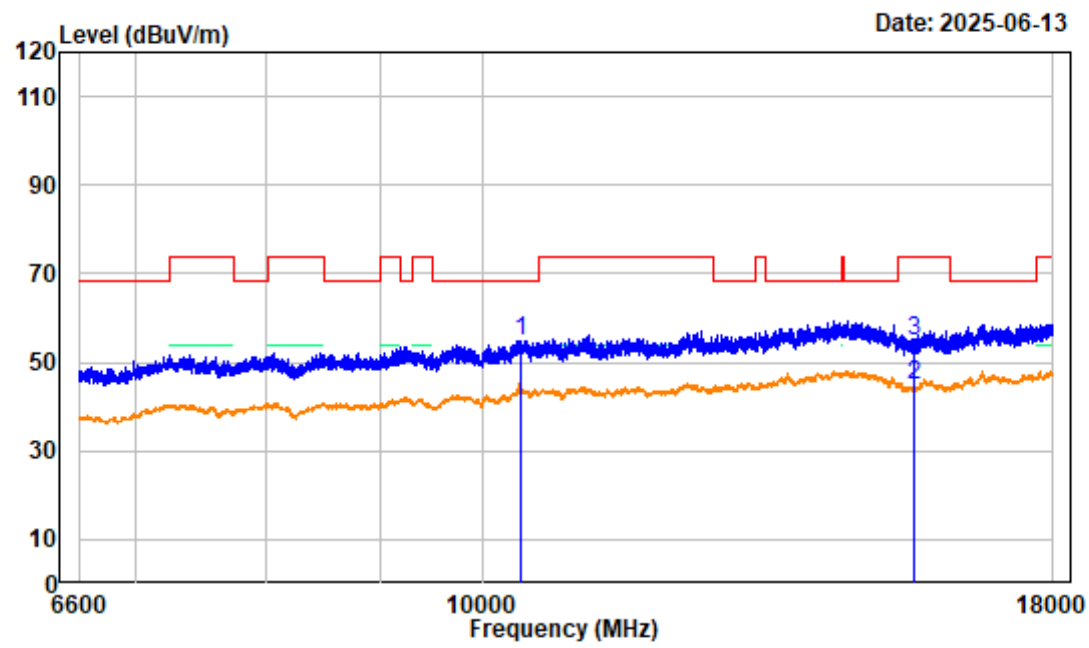

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.10	50.83	54.93	68.20	-13.27	peak
2 15600.000	4.60	40.33	44.93	54.00	-9.07	average
3 15600.000	4.60	50.34	54.94	74.00	-19.06	peak


802.11a High Channel 1GHz-6.6GHz_HORIZONTAL

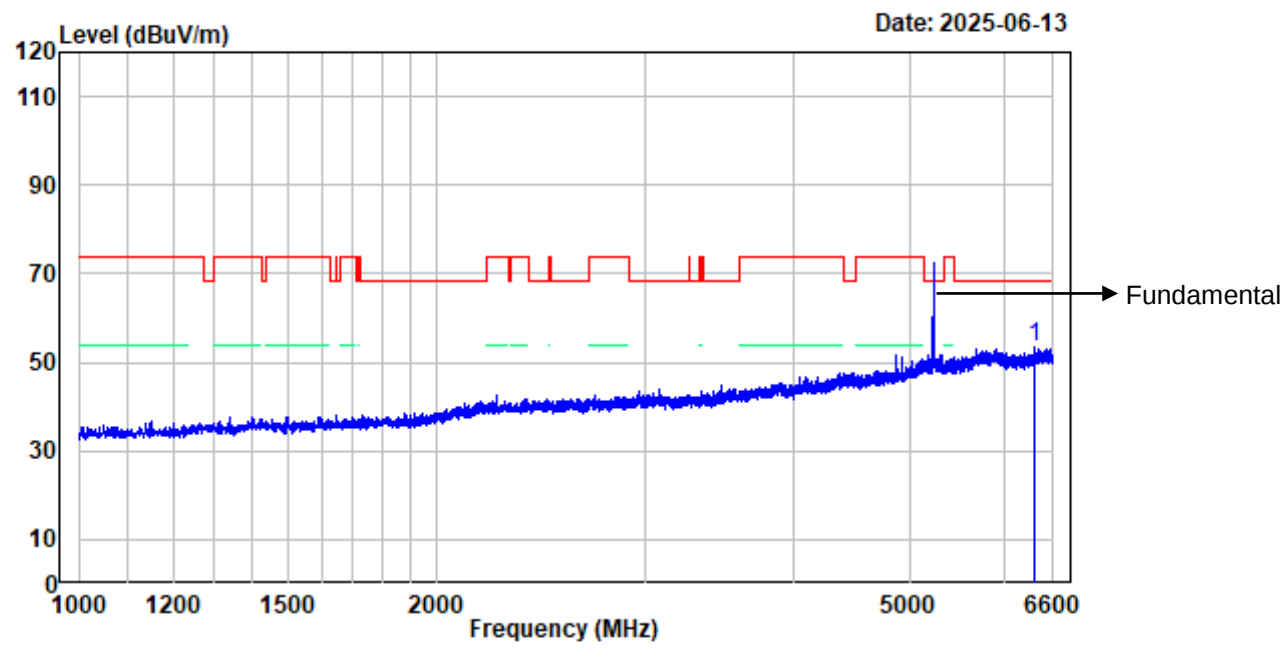

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6362.700	-4.31	57.59	53.28	68.20	-14.92 peak


802.11a High Channel 1GHz-6.6GHz_VERTICAL

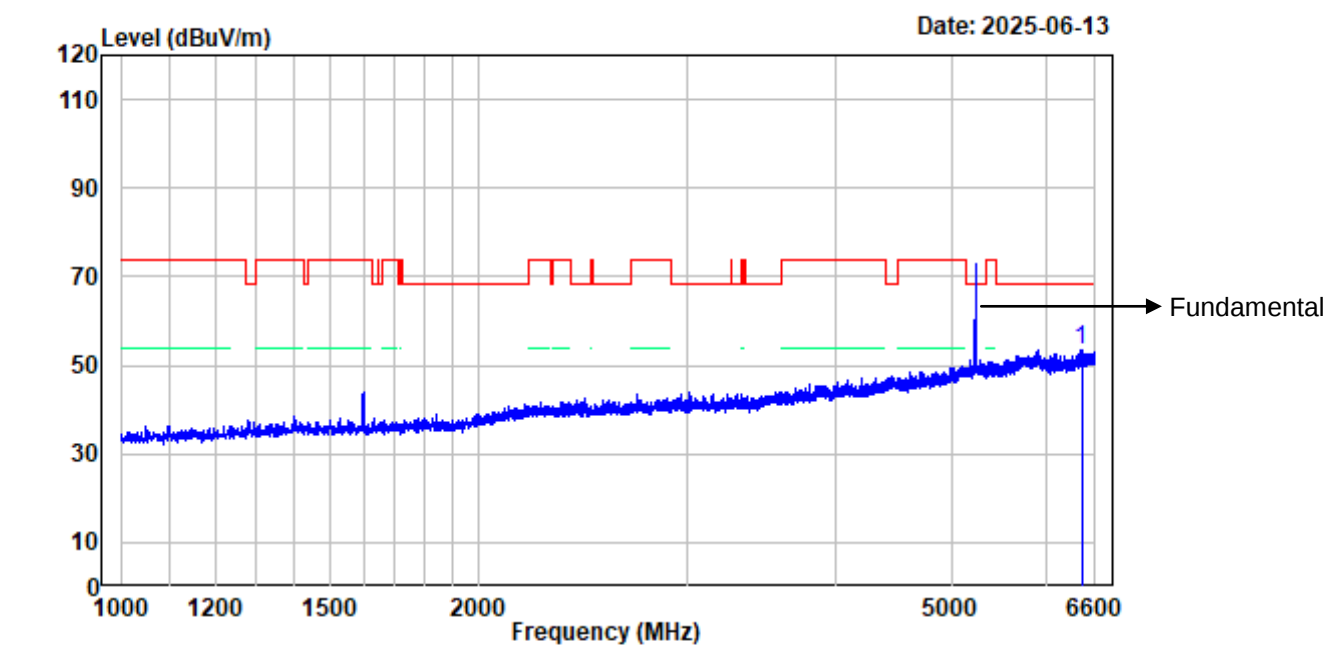

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6428.500	-3.64	57.08	53.44	68.20	-14.76 peak


802.11a High Channel 6.6GHz-18GHz_HORIZONTAL

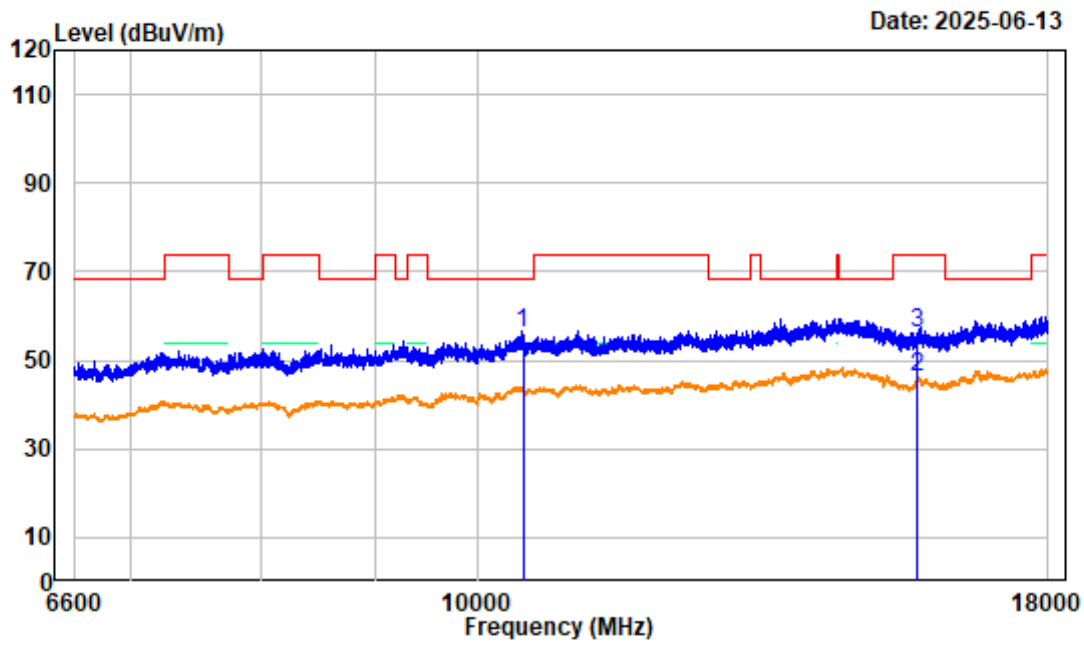

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	3.92	52.03	55.95	68.20	-12.25	peak
2 15720.000	4.90	41.08	45.98	54.00	-8.02	average
3 15720.000	4.90	51.09	55.99	74.00	-18.01	peak


802.11a High Channel 6.6GHz-18GHz_VERTICAL

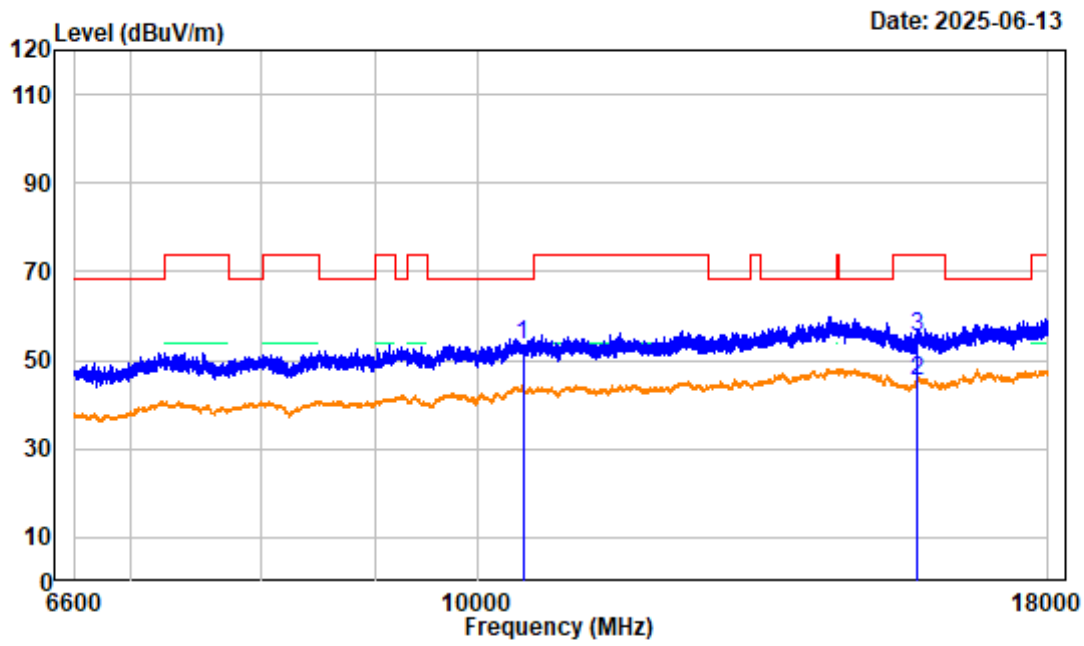

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	3.92	49.61	53.53	68.20	-14.67	peak
2 15720.000	4.90	40.48	45.38	54.00	-8.62	average
3 15720.000	4.90	50.46	55.36	74.00	-18.64	peak


802.11a High Channel Bandedge_HORIZONTAL

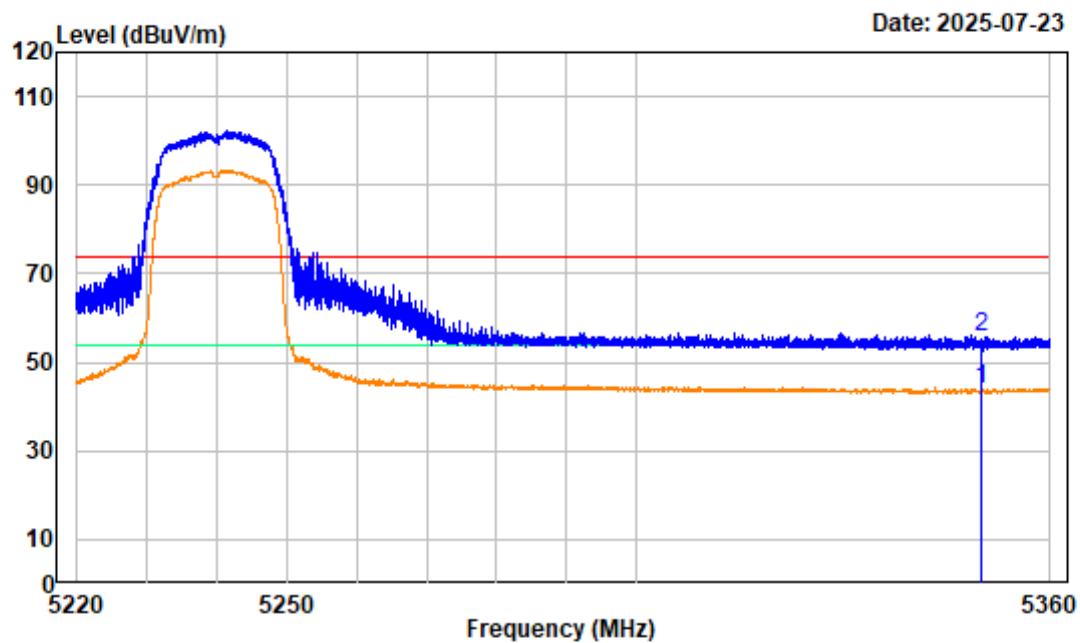

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.59	43.78	54.00	-10.22	average
2	5350.000	-5.81	61.61	55.80	74.00	-18.20	peak


802.11a High Channel Bandedge_VERTICAL

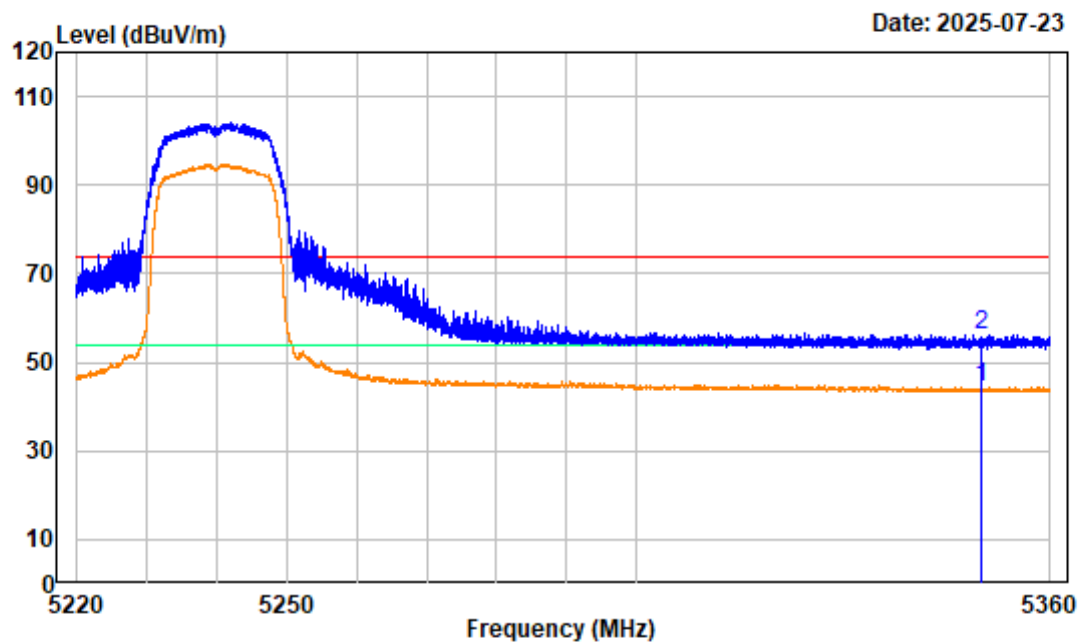

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.00	44.19	54.00	-9.81	average
2	5350.000	-5.81	61.95	56.14	74.00	-17.86	peak


802.11ac20 Low Channel 1GHz-6.6GHz_HORIZONTAL

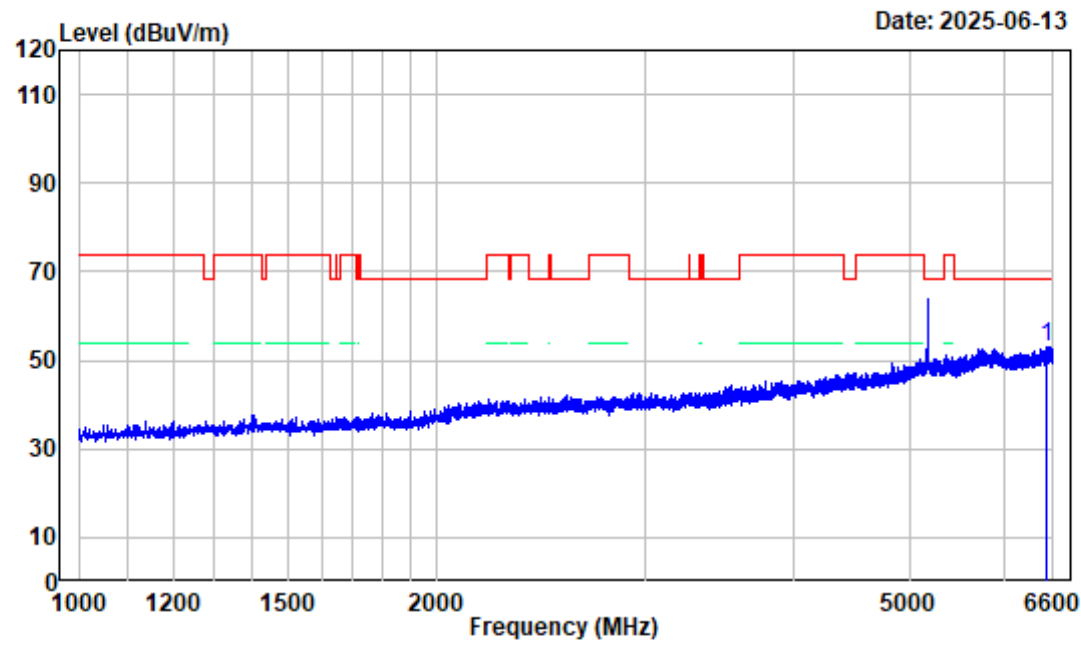

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6514.600	-3.79	56.77	52.98	68.20	-15.22 peak


802.11ac20 Low Channel 1GHz-6.6GHz_VERTICAL

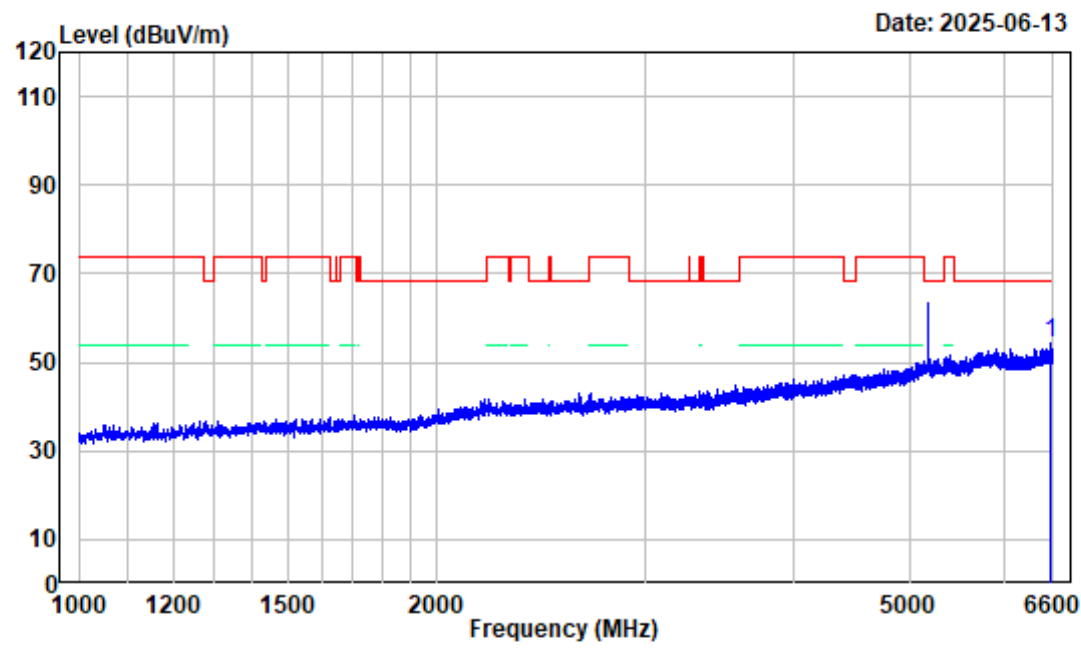

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6565.700	-3.66	58.06	54.40	68.20	-13.80 peak


802.11ac20 Low Channel 6.6GHz-18GHz_HORIZONTAL

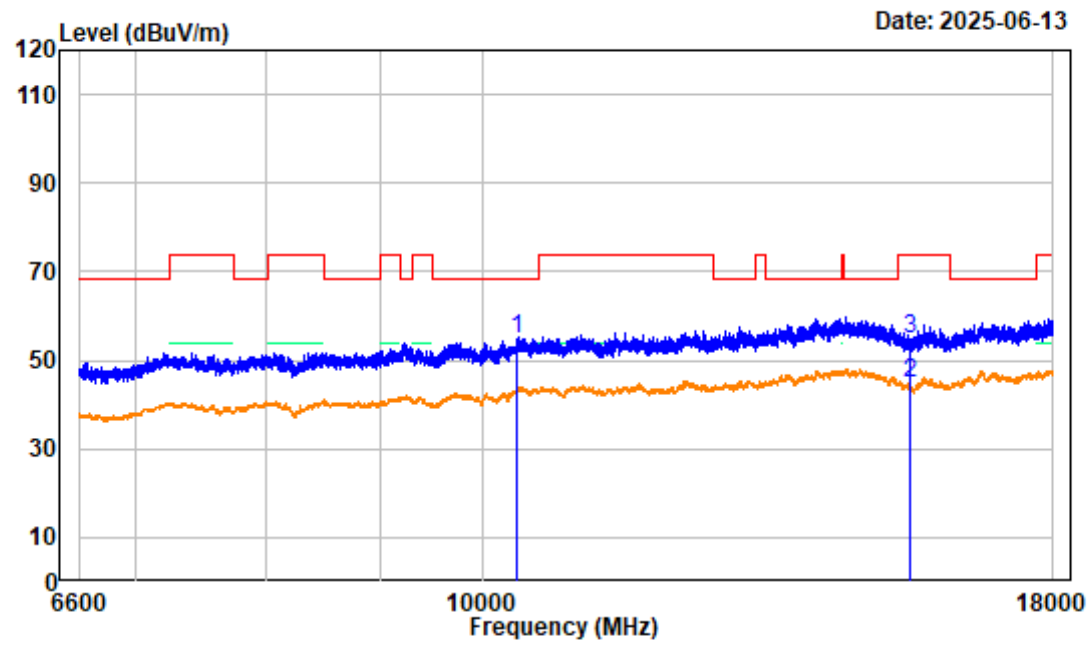

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.84	50.84	54.68	68.20	-13.52	peak
2 15540.000	4.75	40.20	44.95	54.00	-9.05	average
3 15540.000	4.75	50.24	54.99	74.00	-19.01	peak


802.11ac20 Low Channel 6.6GHz-18GHz_VERTICAL

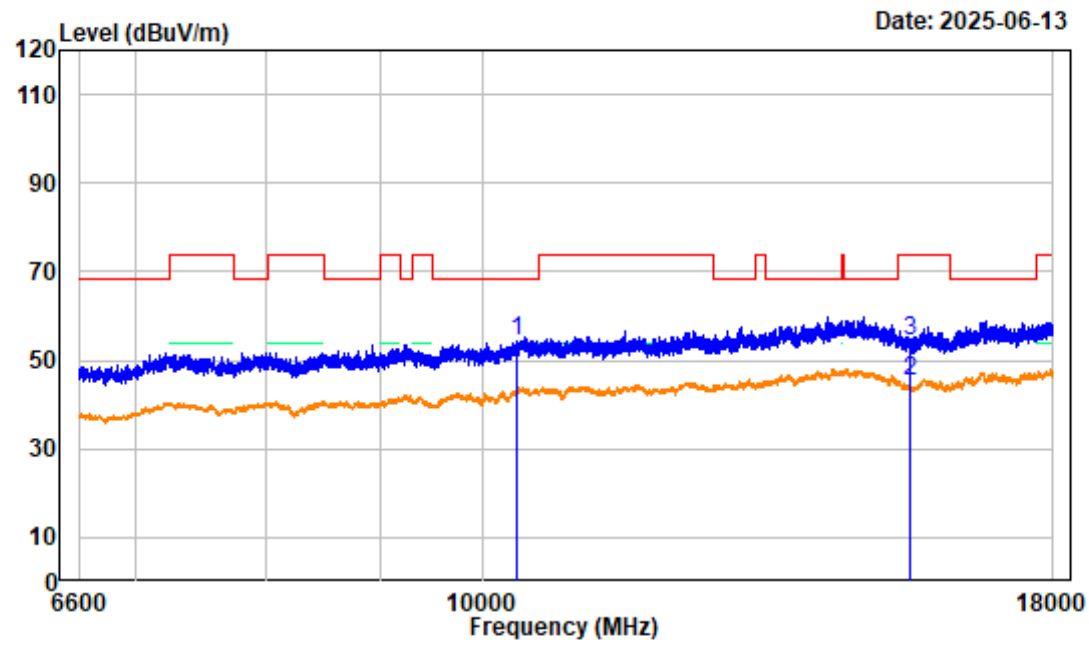

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.84	50.62	54.46	68.20	-13.74	peak
2 15540.000	4.75	40.52	45.27	54.00	-8.73	average
3 15540.000	4.75	49.51	54.26	74.00	-19.74	peak


802.11ac20 Low Channel Bandedge_HORIZONTAL

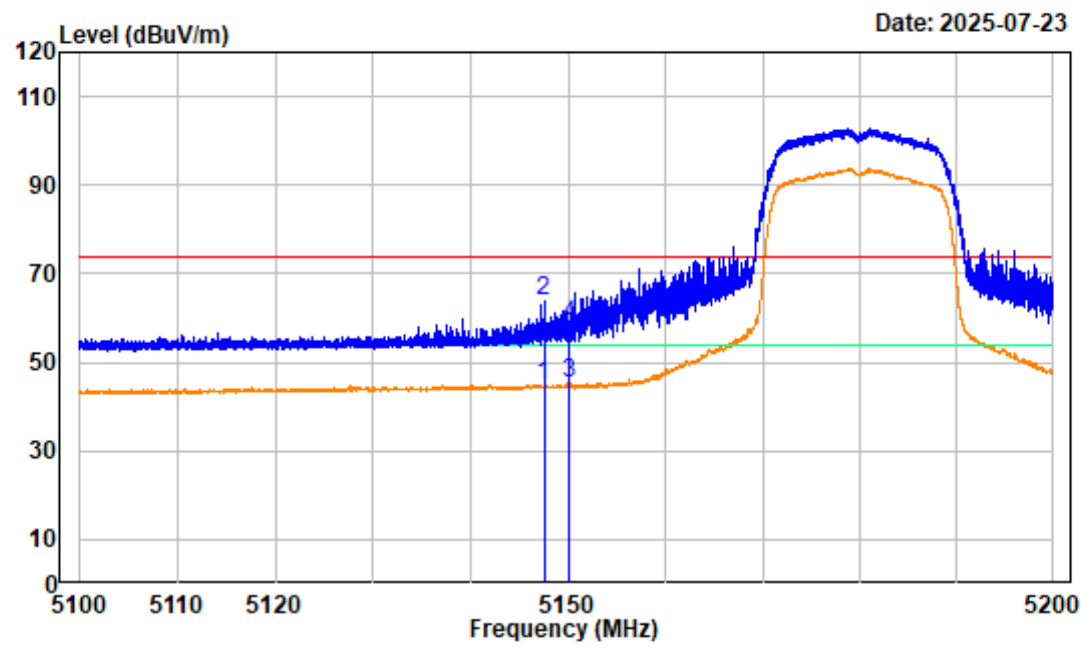

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5147.500	-5.99	50.96	44.97	54.00	-9.03	Average
2	5147.500	-5.99	69.94	63.95	74.00	-10.05	Peak
3	5150.000	-5.99	51.46	45.47	54.00	-8.53	average
4	5150.000	-5.99	64.19	58.20	74.00	-15.80	peak


802.11ac20 Low Channel Bandedge_VERTICAL

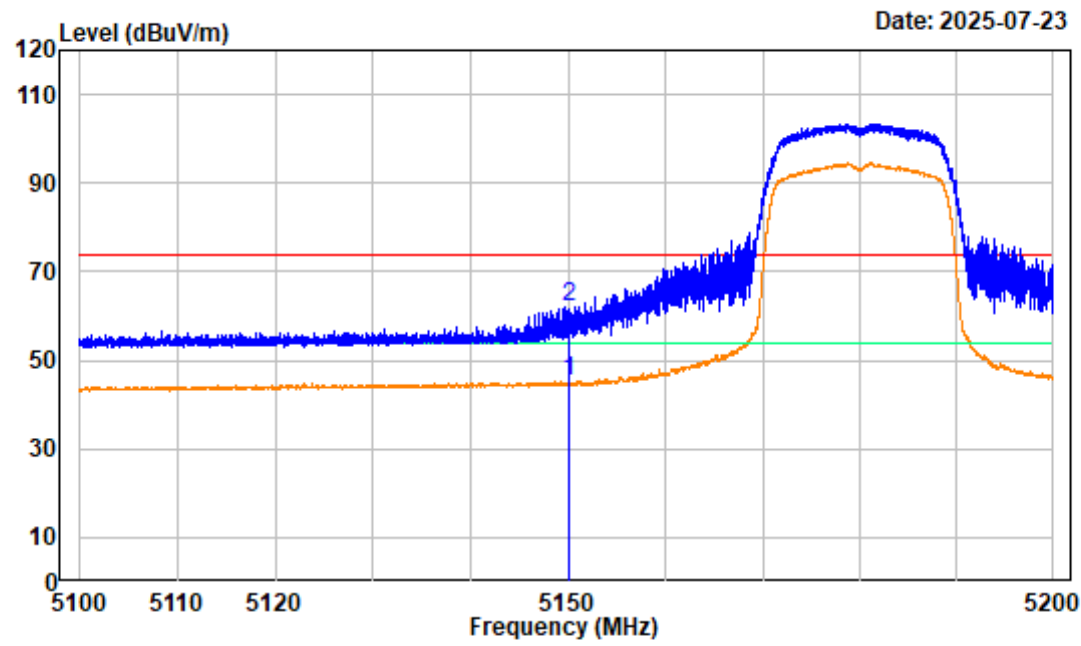

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.12	45.13	54.00	-8.87 average
2	5150.000	-5.99	68.10	62.11	74.00	-11.89 peak


802.11ac20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

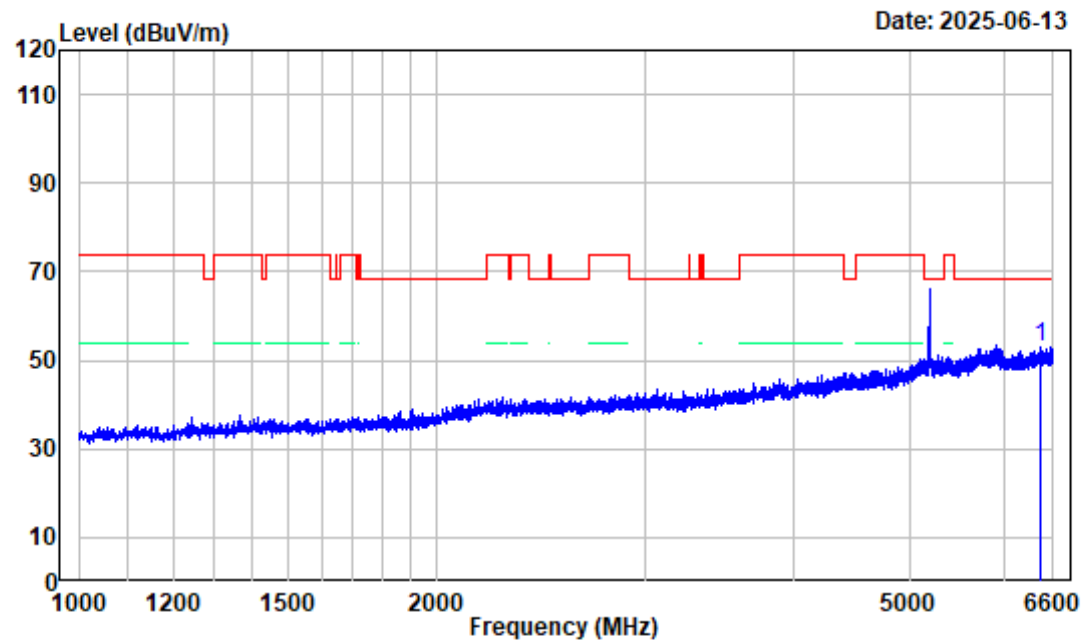

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6448.800	-3.61	56.62	53.01	68.20	-15.19	peak


802.11ac20 Middle Channel 1GHz-6.6GHz_VERTICAL

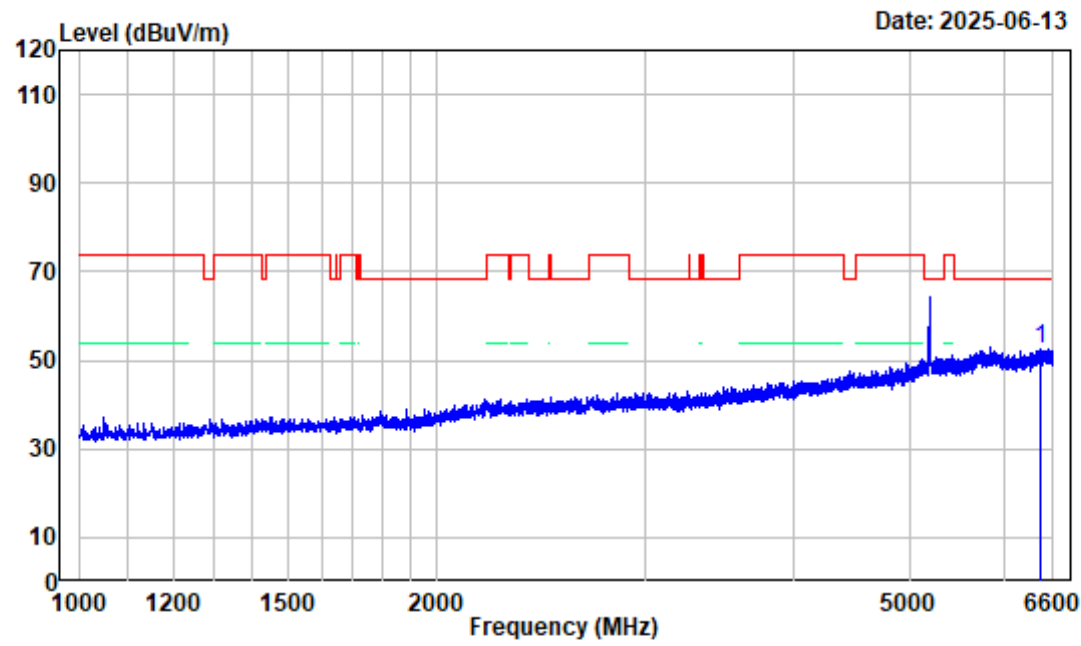

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6439.000	-3.63	56.15	52.52	68.20	-15.68 peak


802.11ac20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

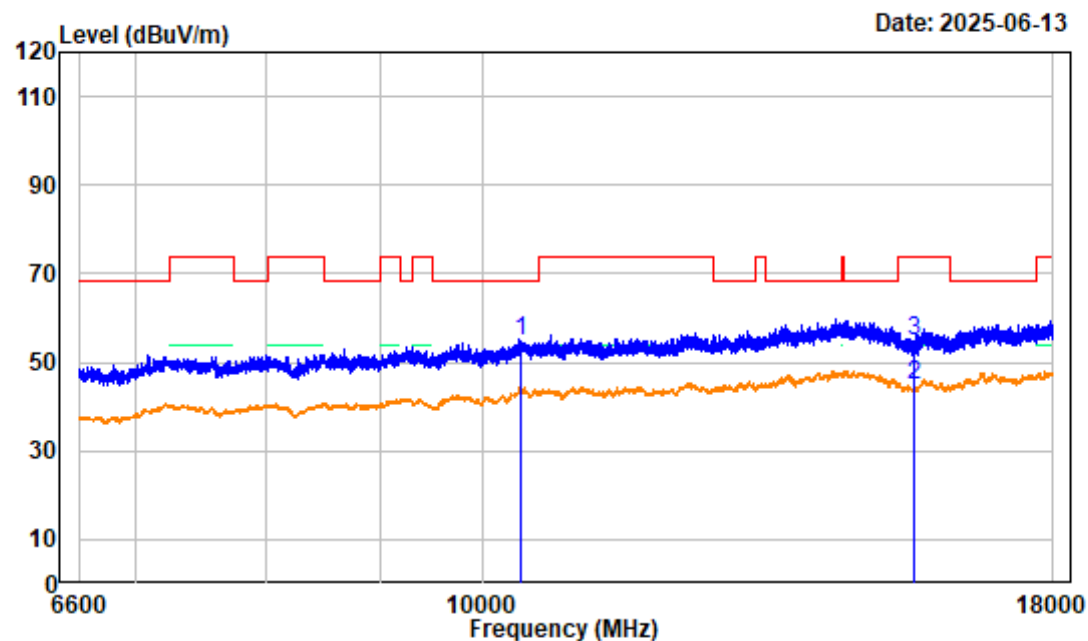

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.10	50.60	54.70	68.20	-13.50	peak
2 15600.000	4.60	40.37	44.97	54.00	-9.03	average
3 15600.000	4.60	50.33	54.93	74.00	-19.07	peak


802.11ac20 Middle Channel 6.6GHz-18GHz_VERTICAL

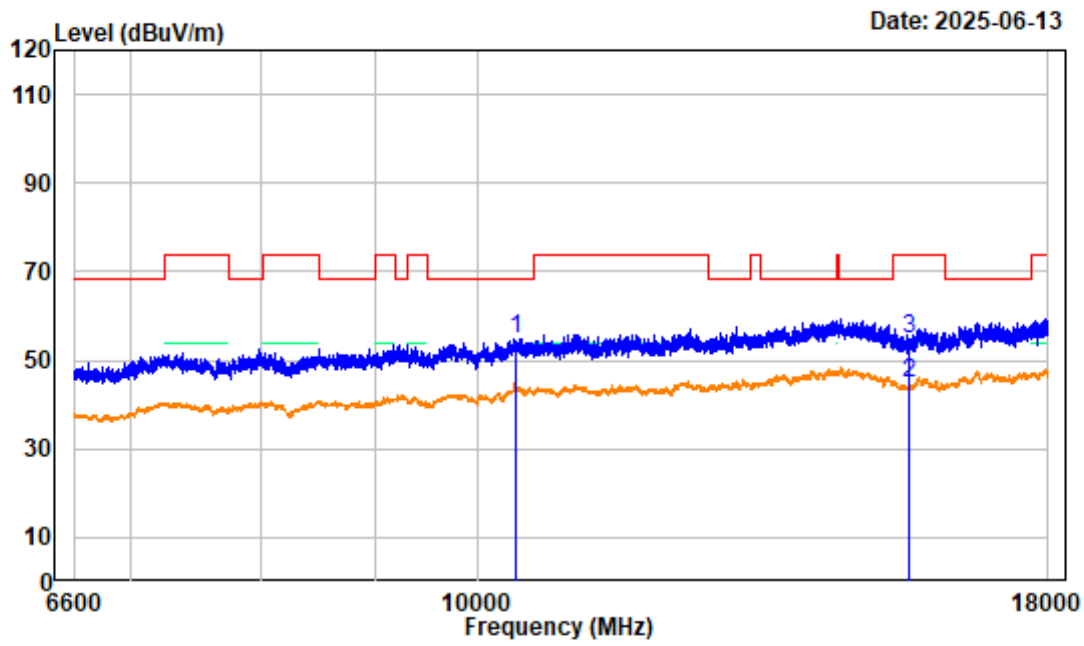

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.10	50.58	54.68	68.20	-13.52	peak
2 15600.000	4.60	40.17	44.77	54.00	-9.23	average
3 15600.000	4.60	50.16	54.76	74.00	-19.24	peak


802.11ac20 High Channel 1GHz-6.6GHz_HORIZONTAL

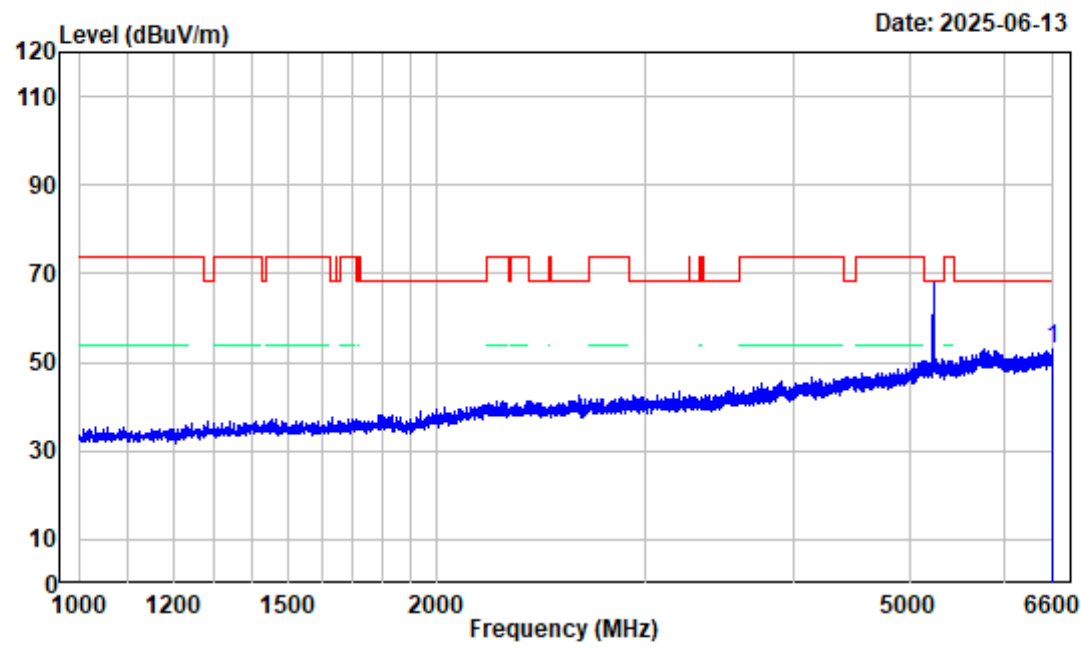

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6588.800	-3.59	56.55	52.96	68.20	-15.24 peak


802.11ac20 High Channel 1GHz-6.6GHz_VERTICAL

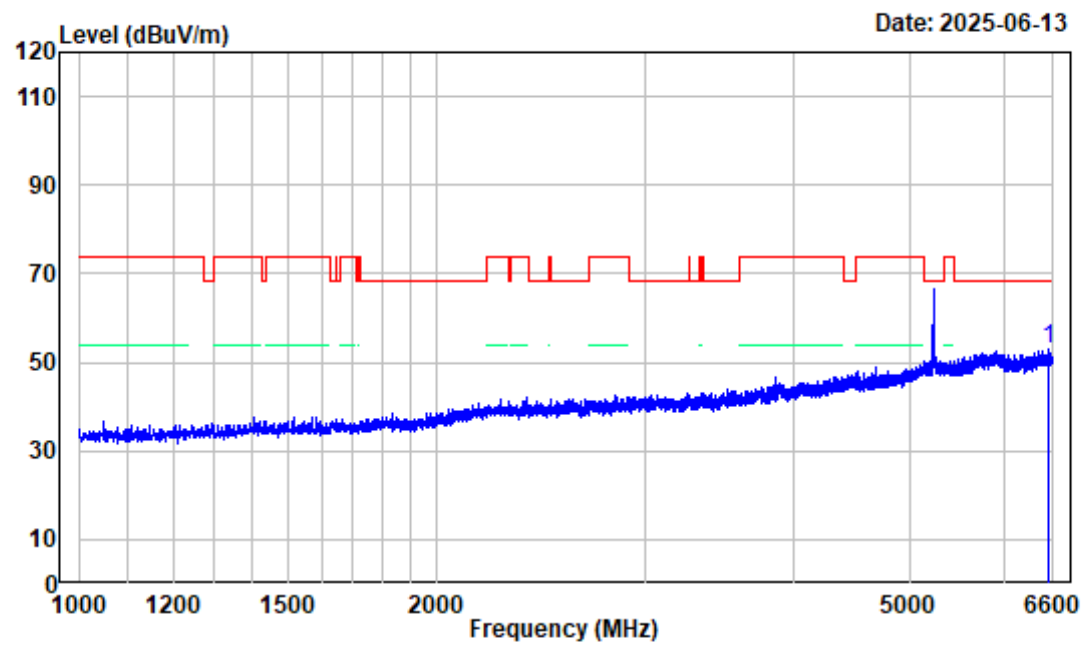

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6548.200	-3.72	56.76	53.04	68.20	-15.16 peak


802.11ac20 High Channel 6.6GHz-18GHz_HORIZONTAL

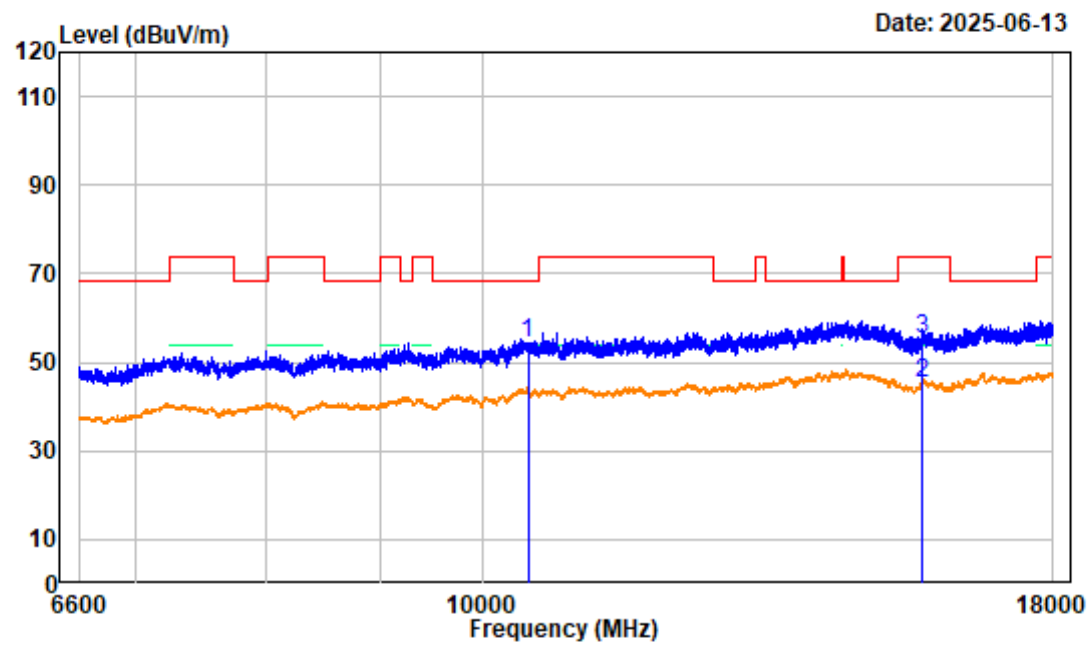

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	3.92	50.64	54.56	68.20	-13.64	peak
2 15720.000	4.90	40.39	45.29	54.00	-8.71	average
3 15720.000	4.90	50.36	55.26	74.00	-18.74	peak


802.11ac20 High Channel 6.6GHz-18GHz_VERTICAL

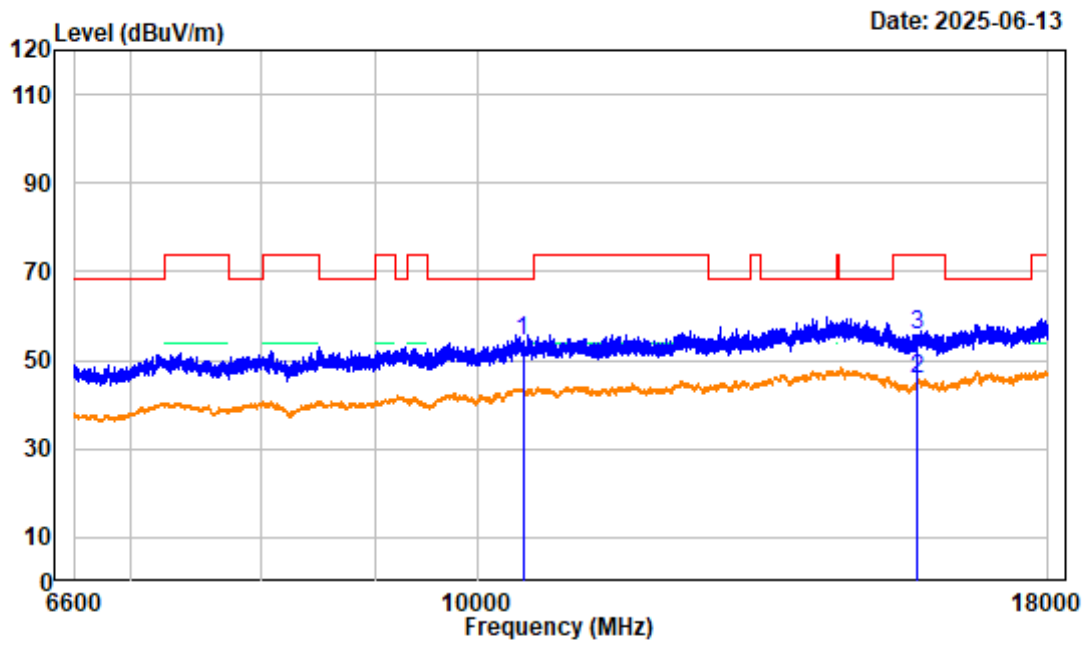

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	3.92	50.28	54.20	68.20	-14.00	peak
2 15720.000	4.90	40.84	45.74	54.00	-8.26	average
3 15720.000	4.90	50.89	55.79	74.00	-18.21	peak


802.11ac20 High Channel Bandedge_HORIZONTAL

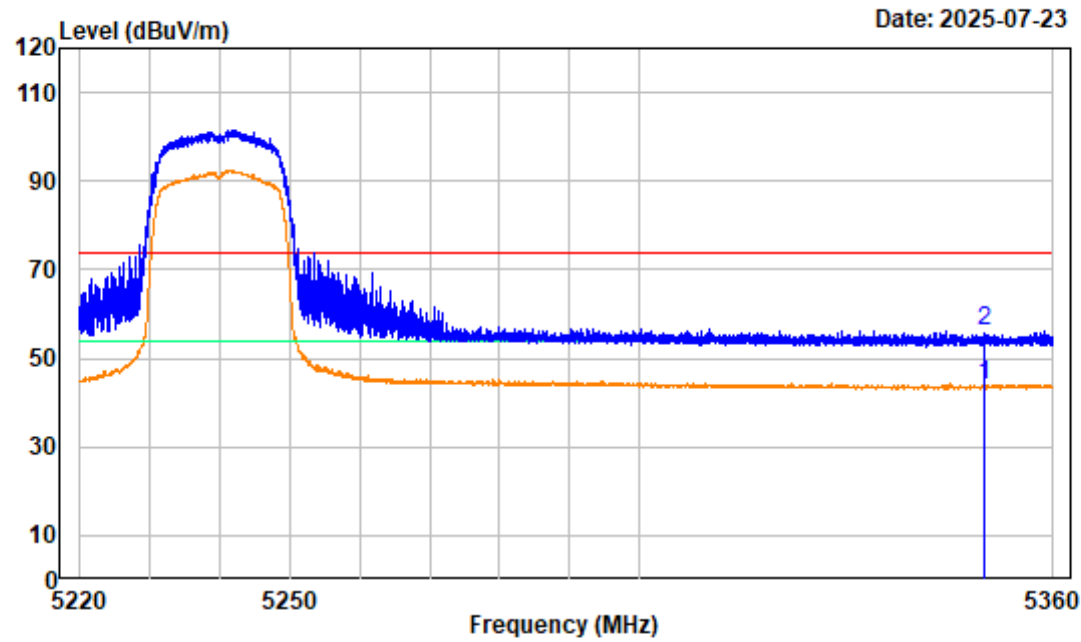

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5240MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.88	44.07	54.00	-9.93 average
2	5350.000	-5.81	61.83	56.02	74.00	-17.98 peak


802.11ac20 High Channel Bandedge_VERTICAL

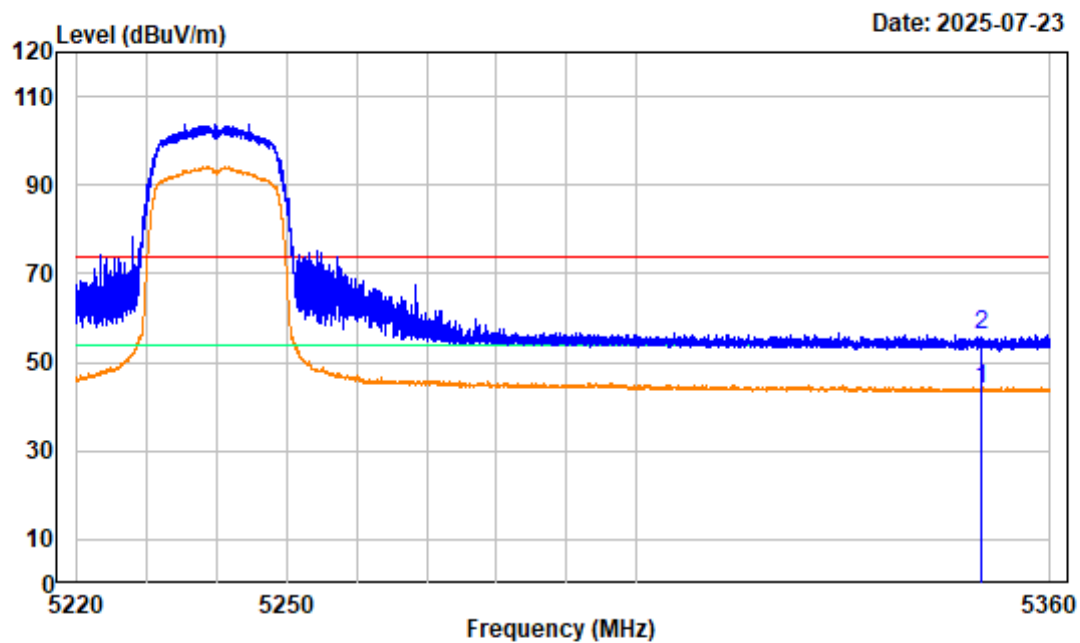

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.84	44.03	54.00	-9.97	average
2	5350.000	-5.81	61.86	56.05	74.00	-17.95	peak


802.11ac40 Low Channel 1GHz-6.6GHz_HORIZONTAL

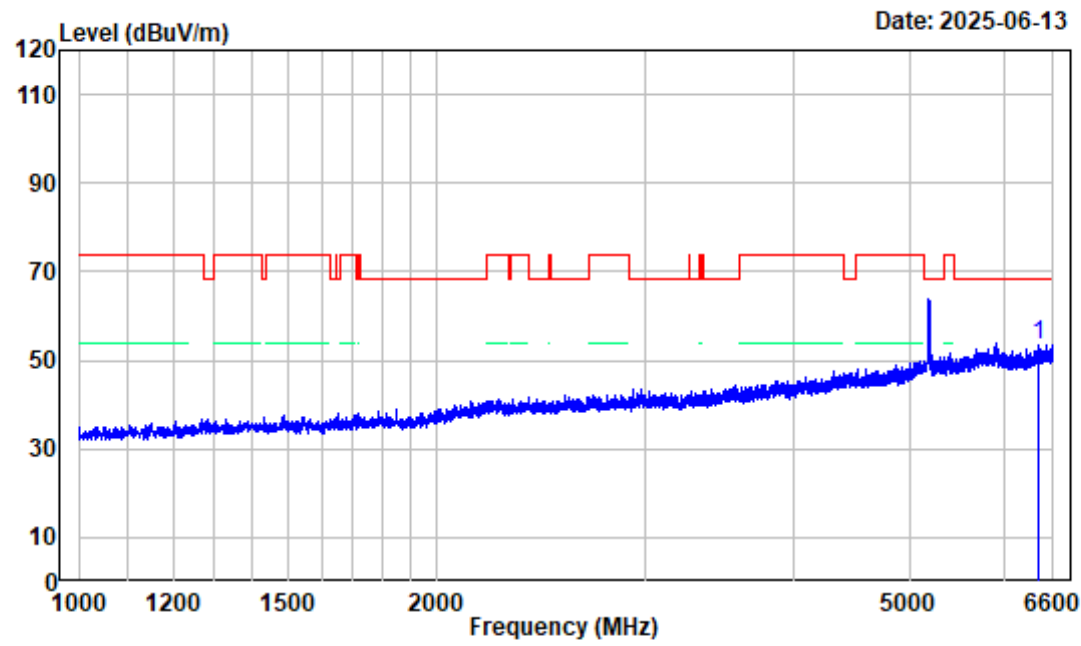

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6419.400	-3.64	57.18	53.54	68.20	-14.66 peak


802.11ac40 Low Channel 1GHz-6.6GHz_VERTICAL

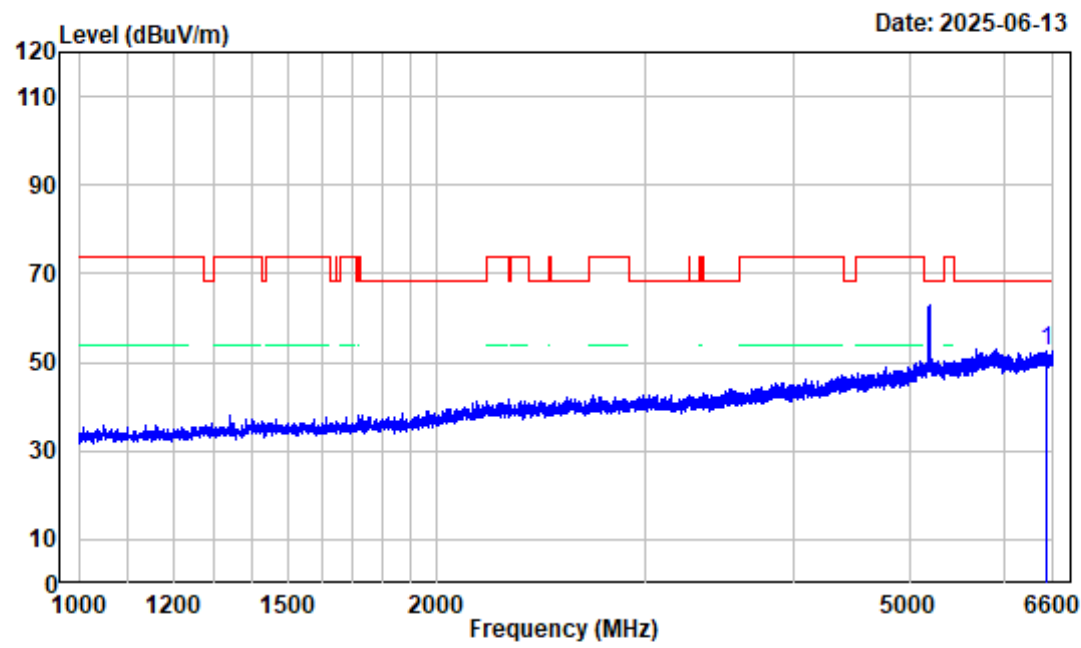

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6519.500	-3.78	56.33	52.55	68.20	-15.65 peak


802.11ac40 Low Channel 6.6GHz-18GHz_HORIZONTAL

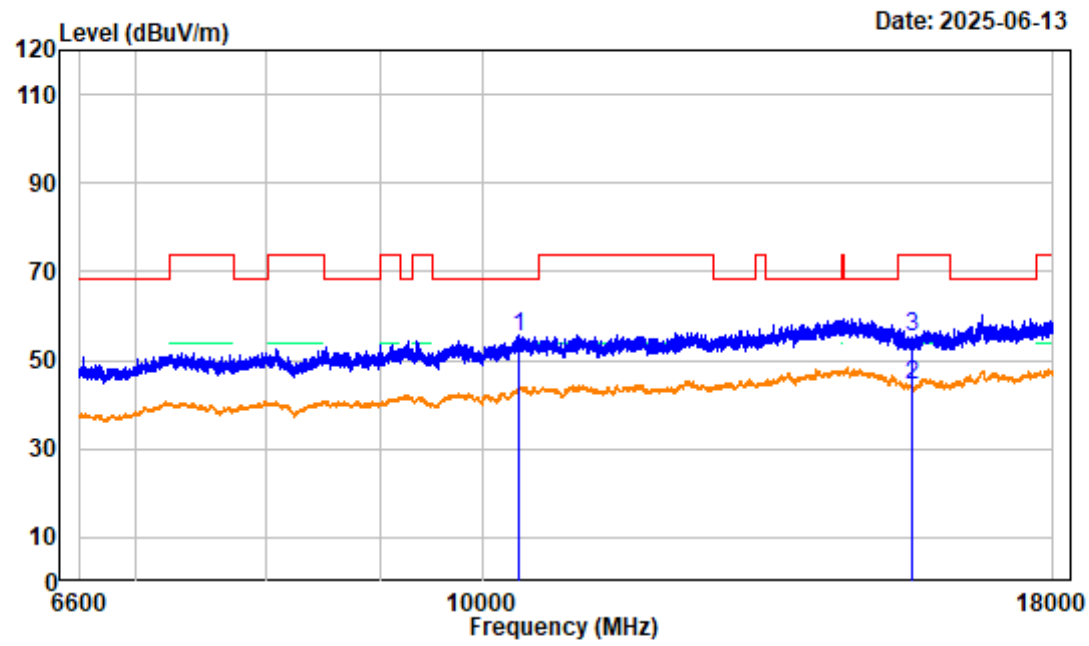

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5190MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.000	3.97	51.41	55.38	68.20	-12.82	peak
2 15570.000	4.70	39.70	44.40	54.00	-9.60	average
3 15570.000	4.70	50.71	55.41	74.00	-18.59	peak


802.11ac40 Low Channel 6.6GHz-18GHz_VERTICAL

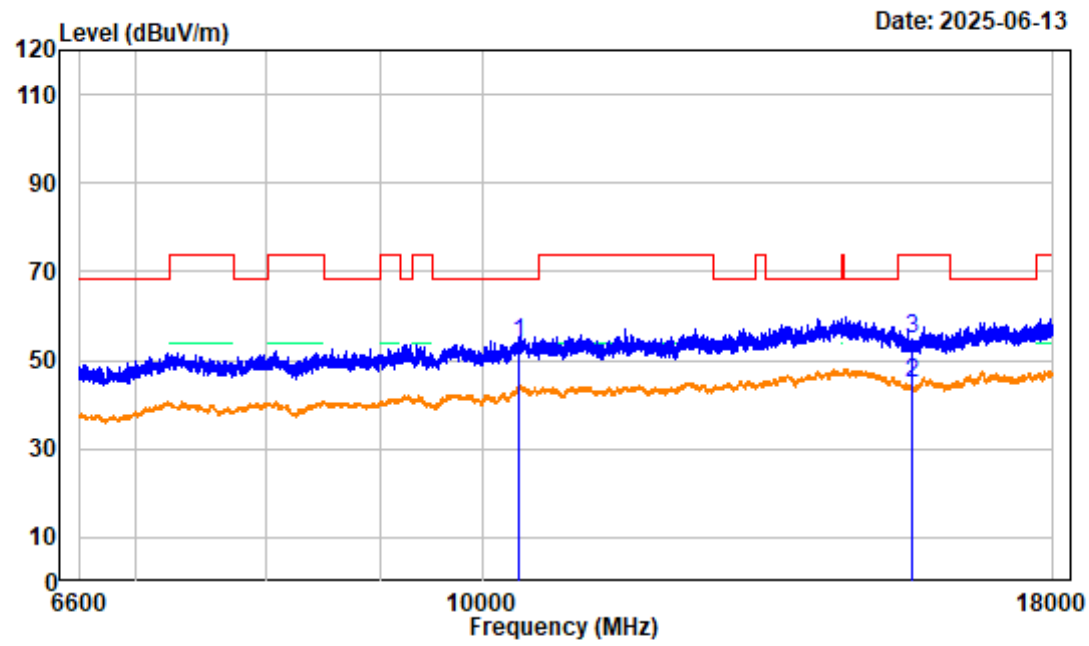

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5190MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.000	3.97	49.91	53.88	68.20	-14.32	peak
2 15570.000	4.70	40.17	44.87	54.00	-9.13	average
3 15570.000	4.70	50.19	54.89	74.00	-19.11	peak


802.11ac40 Low Channel Bandedge_HORIZONTAL

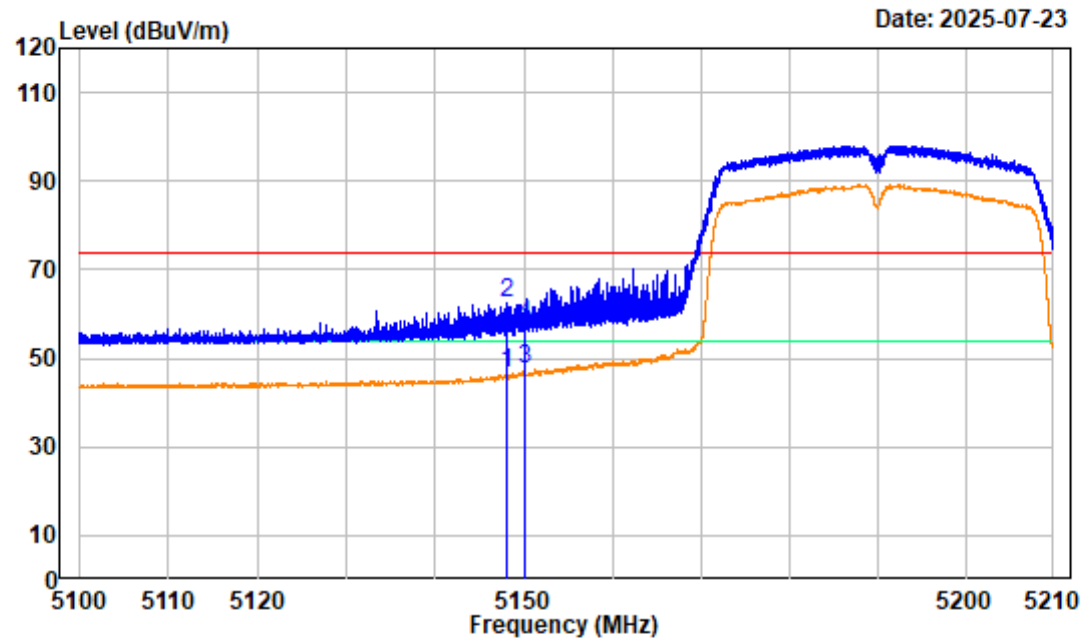

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5190MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.056	-5.99	52.42	46.43	54.00	-7.57	Average
2	5148.056	-5.99	68.39	62.40	74.00	-11.60	Peak
3	5150.000	-5.99	53.39	47.40	54.00	-6.60	average
4	5150.000	-5.99	63.66	57.67	74.00	-16.33	peak

802.11ac40 Low Channel Bandedge_VERTICAL

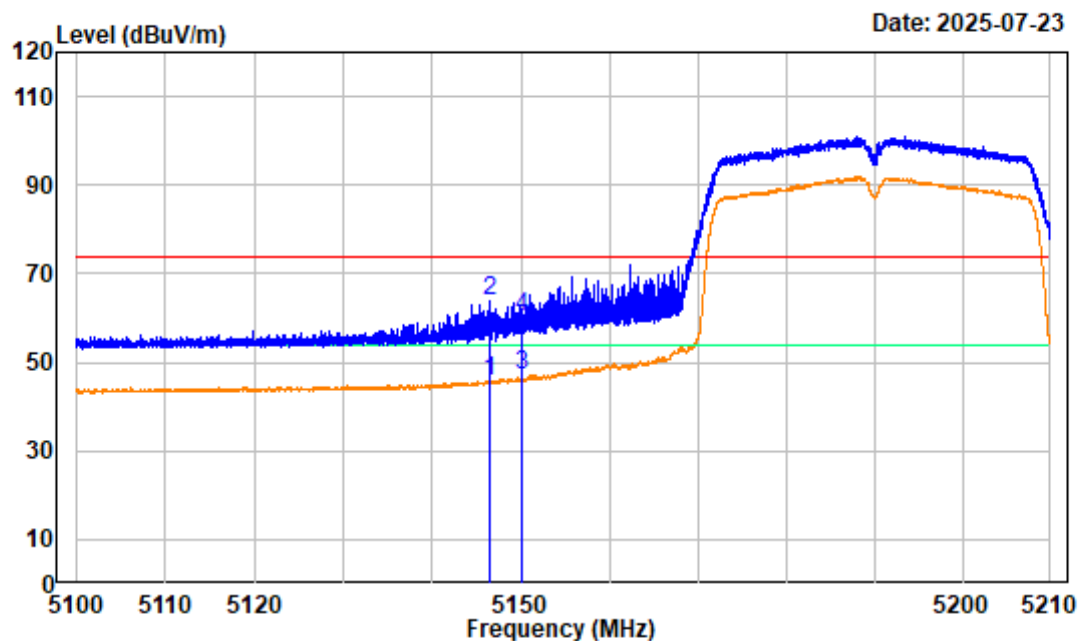

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.393	-6.00	51.92	45.92	54.00	-8.08	Average
2	5146.393	-6.00	69.95	63.95	74.00	-10.05	Peak
3	5150.000	-5.99	52.92	46.93	54.00	-7.07	average
4	5150.000	-5.99	66.19	60.20	74.00	-13.80	peak


802.11ac40 High Channel 1GHz-6.6GHz_HORIZONTAL

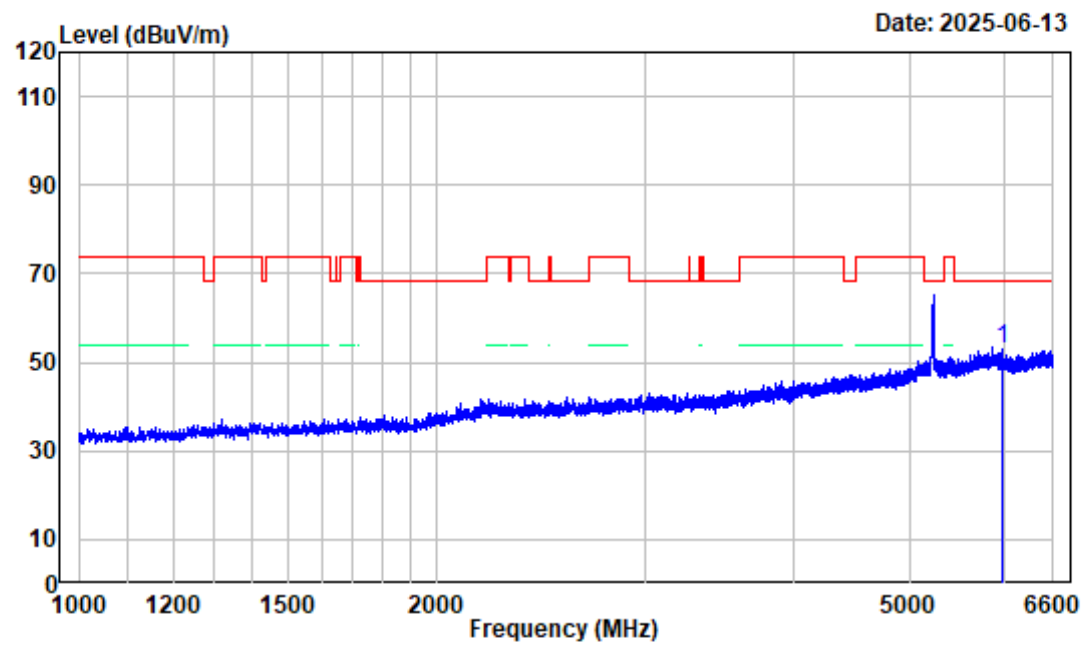

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5979.100	-4.87	57.68	52.81	68.20	-15.39	peak


802.11ac40 High Channel 1GHz-6.6GHz_VERTICAL

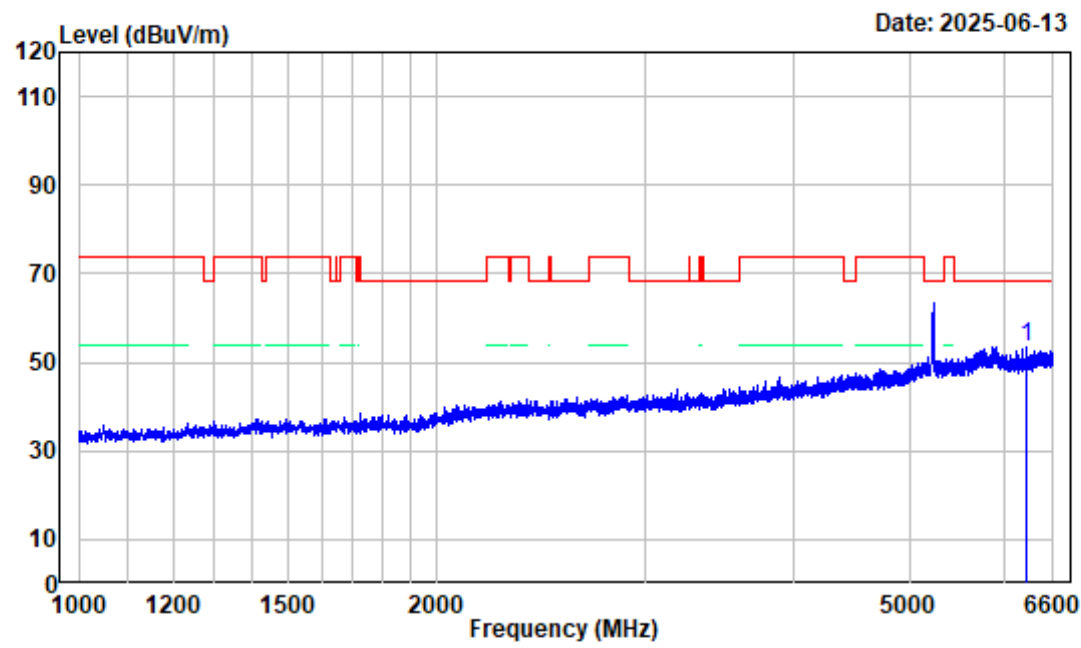

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6262.600	-4.60	57.95	53.35	68.20	-14.85 peak

802.11ac40 High Channel 6.6GHz-18GHz_HORIZONTAL

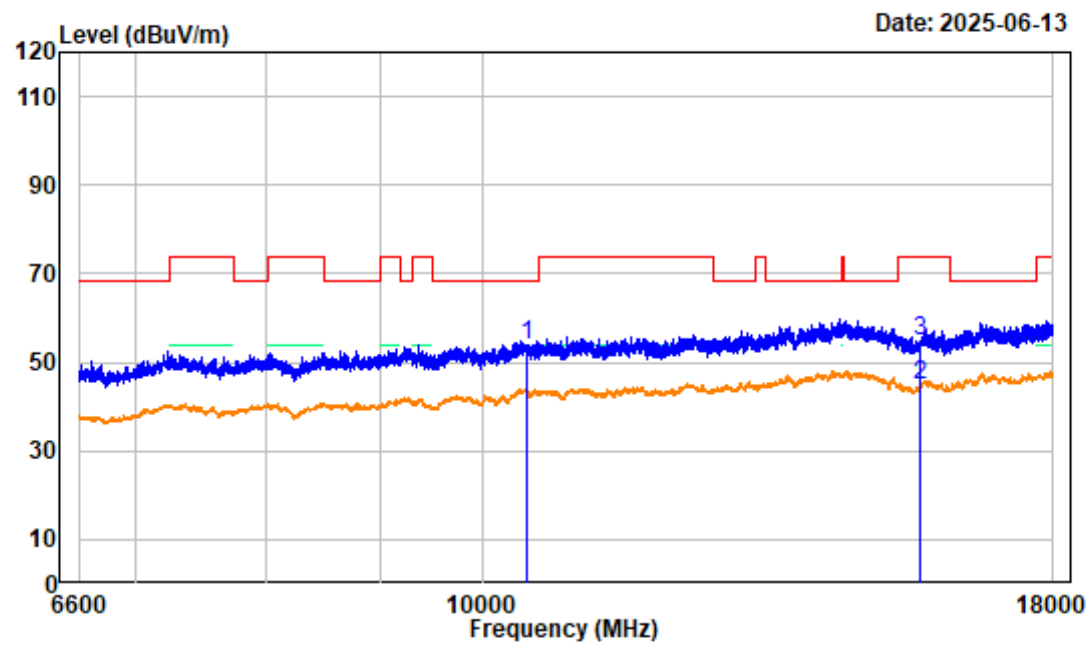

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11ac40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	4.18	49.88	54.06	68.20	-14.14	peak
2 15690.000	4.67	40.36	45.03	54.00	-8.97	average
3 15690.000	4.67	50.34	55.01	74.00	-18.99	peak


802.11ac40 High Channel 6.6GHz-18GHz_VERTICAL

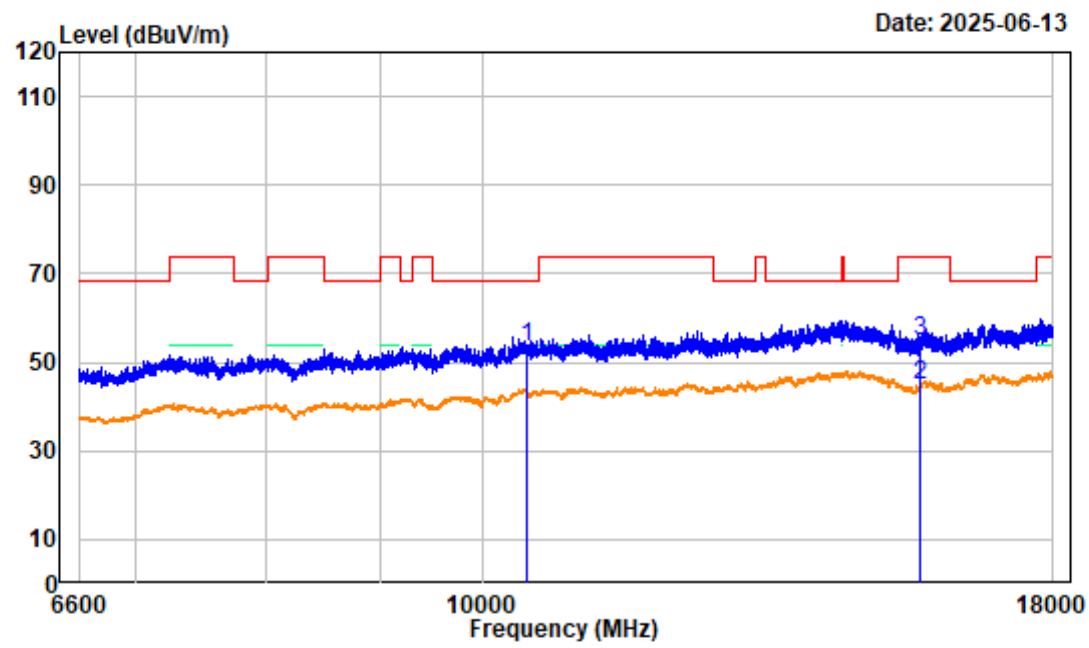

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5230MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	4.18	49.34	53.52	68.20	-14.68	peak
2 15690.000	4.67	40.29	44.96	54.00	-9.04	average
3 15690.000	4.67	50.26	54.93	74.00	-19.07	peak


802.11ac40 High Channel Bandedge_HORIZONTAL

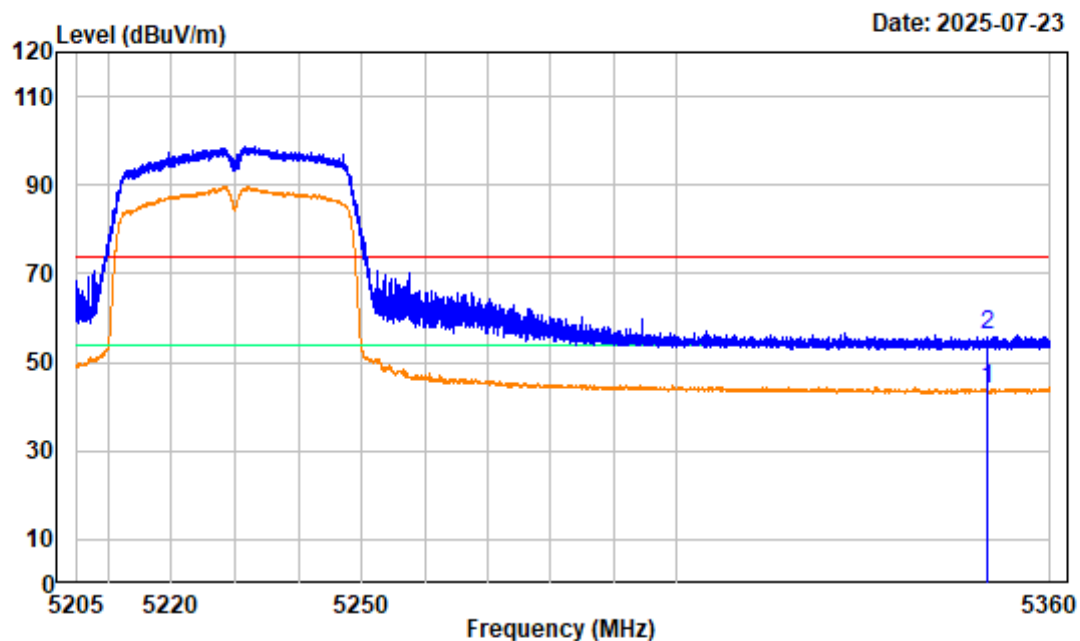

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5230MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.74	43.93	54.00	-10.07	average
2	5350.000	-5.81	61.78	55.97	74.00	-18.03	peak


802.11ac40 High Channel Bandedge_VERTICAL

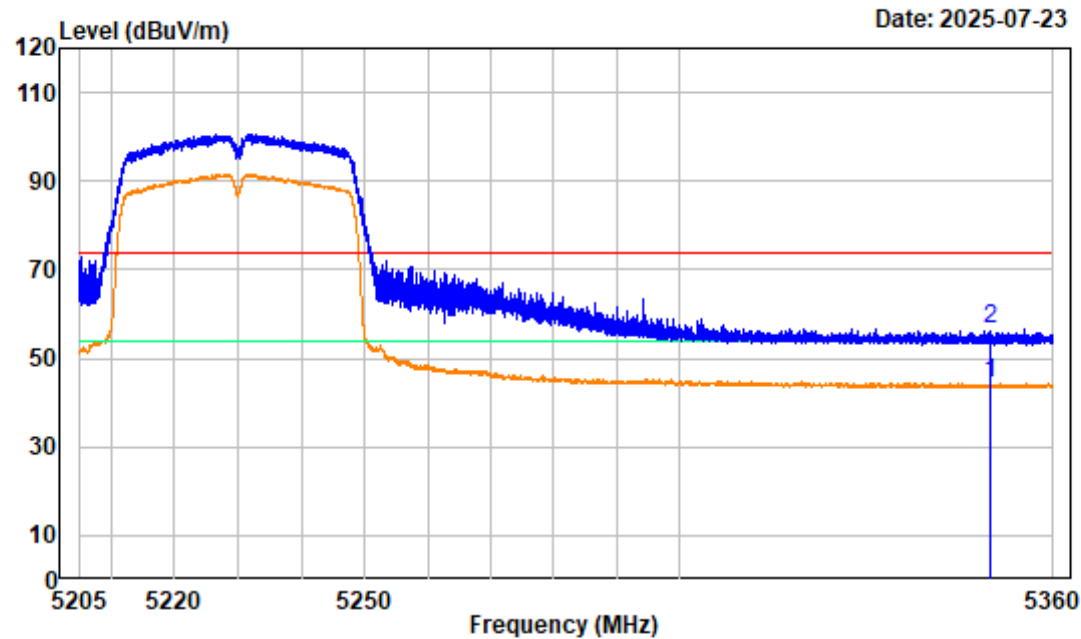

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5230MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.11	44.30	54.00	-9.70 average
2	5350.000	-5.81	62.19	56.38	74.00	-17.62 peak


802.11ac80 Channel 1GHz-6.6GHz_HORIZONTAL

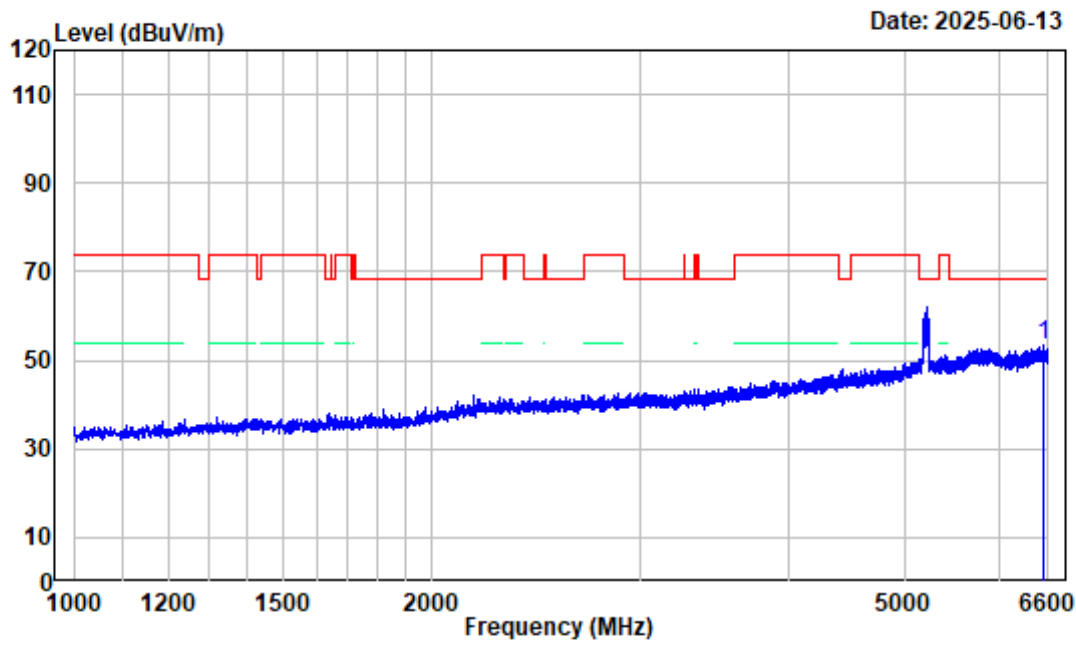

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5210MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6542.600	-3.73	57.33	53.60	68.20	-14.60 peak


802.11ac80 Channel 1GHz-6.6GHz_VERTICAL

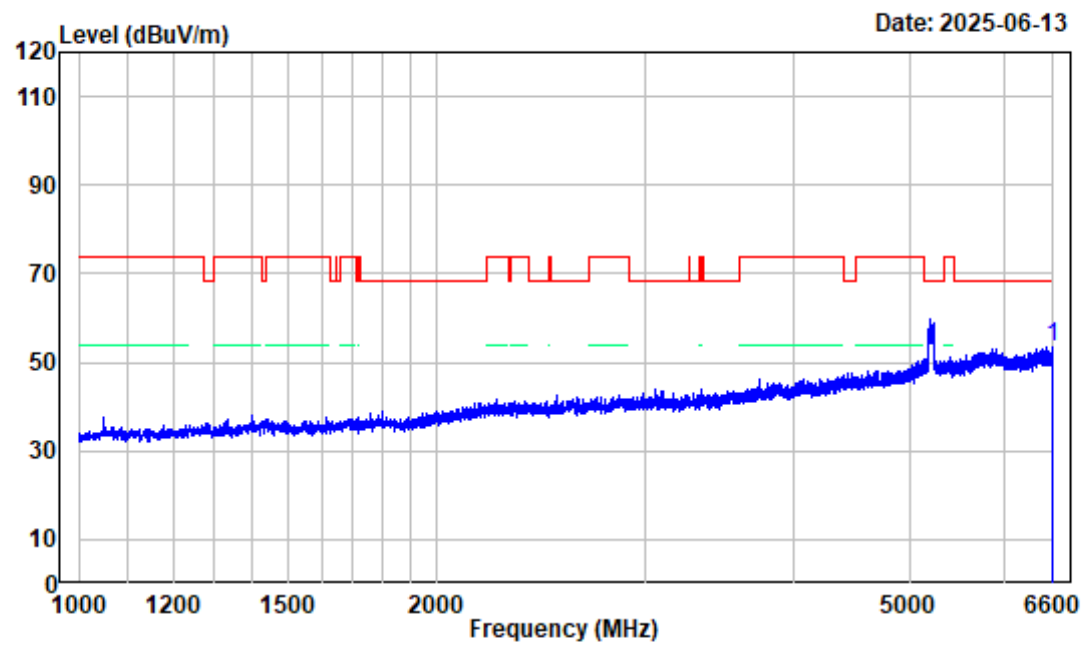

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5210MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6585.300	-3.60	57.26	53.66	68.20	-14.54 peak


802.11ac80 Channel 6.6GHz-18GHz_HORIZONTAL

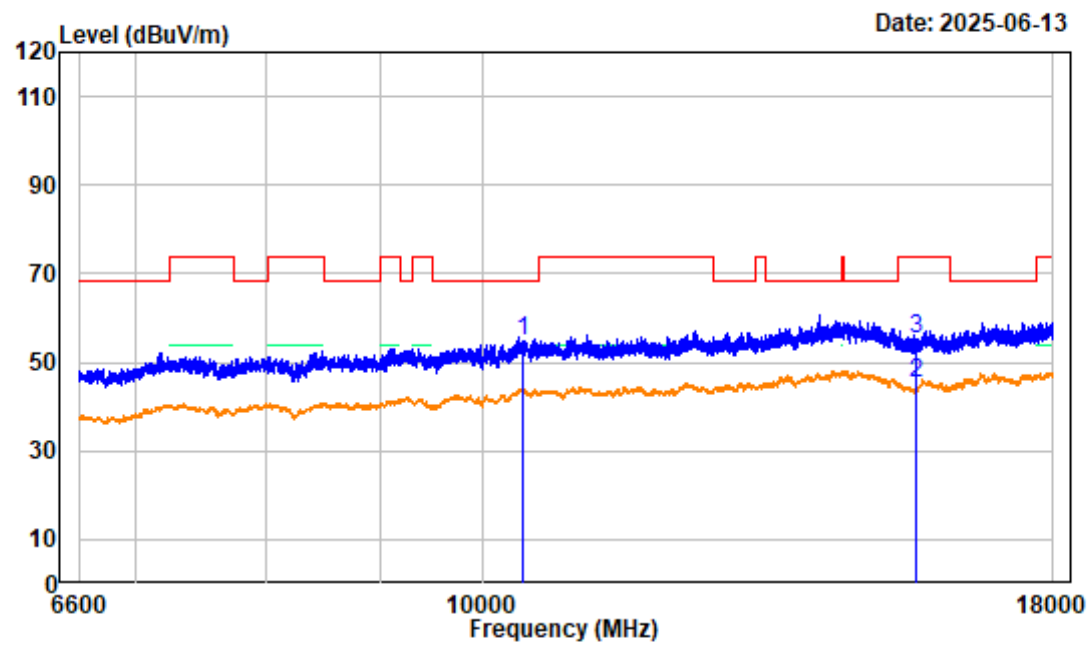

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5210MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10420.000	4.18	50.62	54.80	68.20	-13.40	peak
2 15630.000	4.65	40.53	45.18	54.00	-8.82	average
3 15630.000	4.65	50.48	55.13	74.00	-18.87	peak


802.11ac80 Channel 6.6GHz-18GHz_VERTICAL

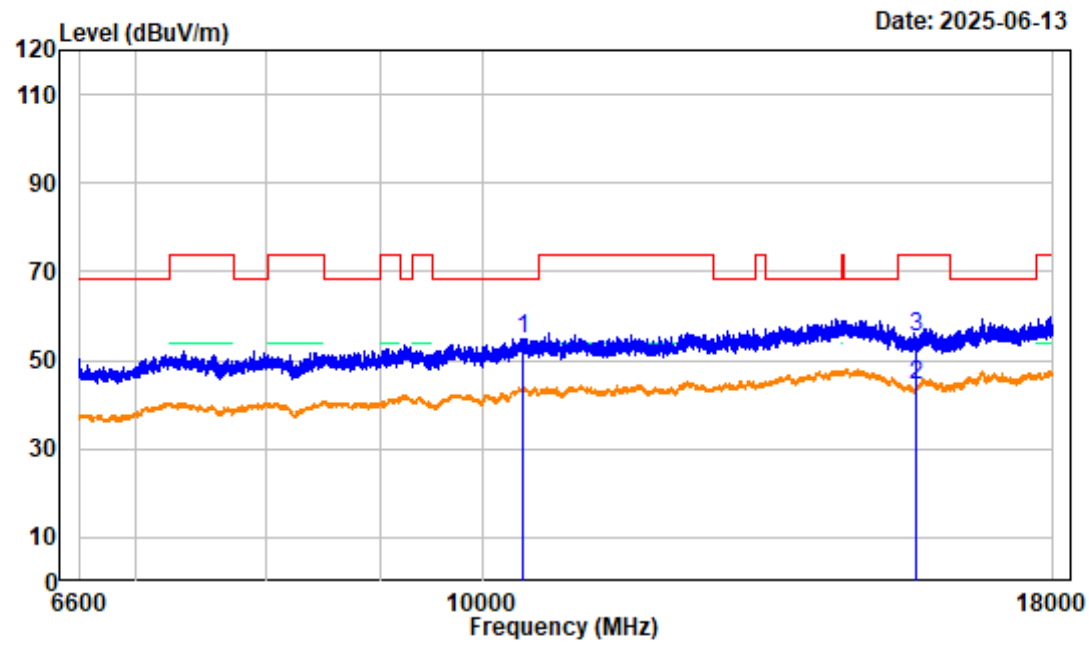

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5210MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10420.000	4.18	50.66	54.84	68.20	-13.36	peak
2 15630.000	4.65	39.77	44.42	54.00	-9.58	average
3 15630.000	4.65	50.80	55.45	74.00	-18.55	peak


802.11ac80 Channel Bandedge_HORIZONTAL

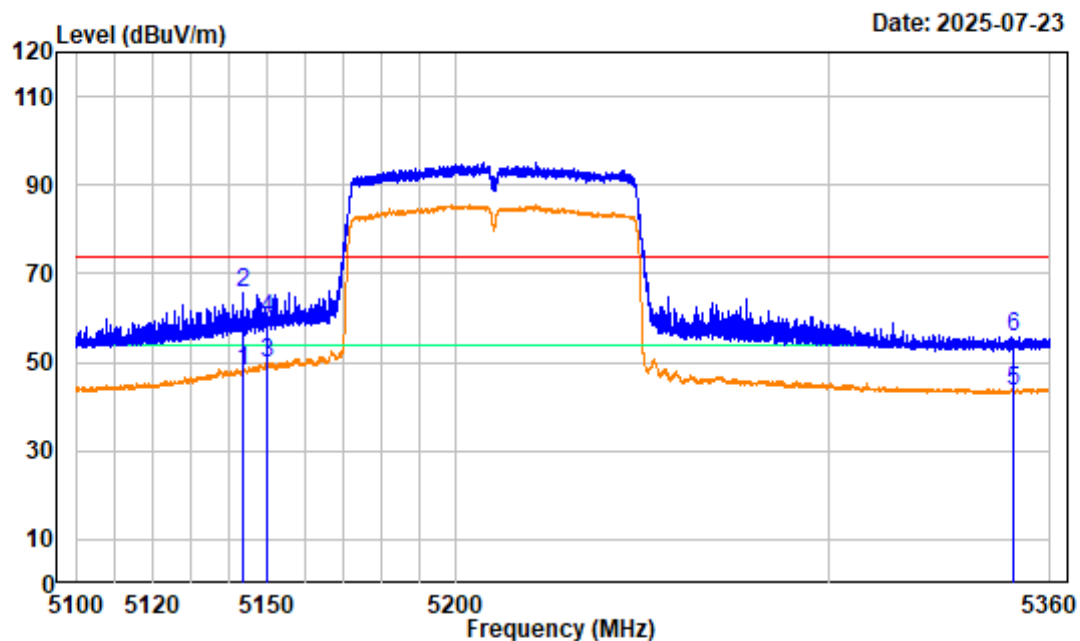

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Channel 5210MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.777	-6.00	53.85	47.85	54.00	-6.15	Average
2	5143.777	-6.00	71.80	65.80	74.00	-8.20	Peak
3	5150.000	-5.99	55.82	49.83	54.00	-4.17	average
4	5150.000	-5.99	65.65	59.66	74.00	-14.34	peak
5	5350.000	-5.81	49.49	43.68	54.00	-10.32	average
6	5350.000	-5.81	61.51	55.70	74.00	-18.30	peak


802.11ac80 Channel Bandedge_VERTICAL

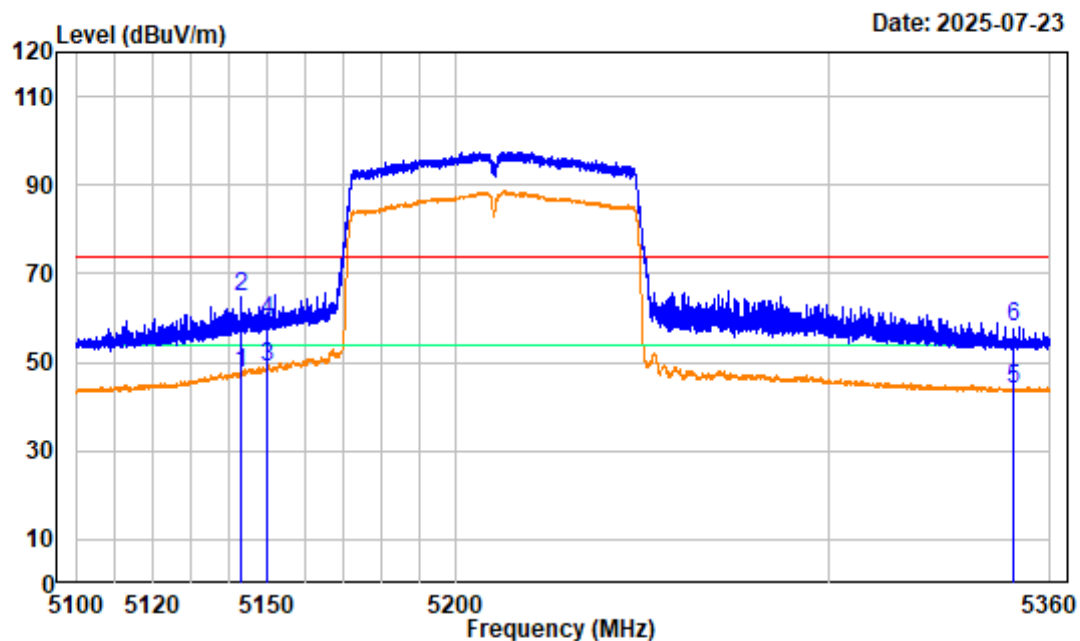

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Channel 5210MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5143.257	-6.00	53.73	47.73	54.00	-6.27	Average
2	5143.257	-6.00	70.71	64.71	74.00	-9.29	Peak
3	5150.000	-5.99	54.75	48.76	54.00	-5.24	average
4	5150.000	-5.99	65.25	59.26	74.00	-14.74	peak
5	5350.000	-5.81	49.68	43.87	54.00	-10.13	average
6	5350.000	-5.81	63.67	57.86	74.00	-16.14	peak


802.11a Low Channel 1GHz-6.6GHz_HORIZONTAL

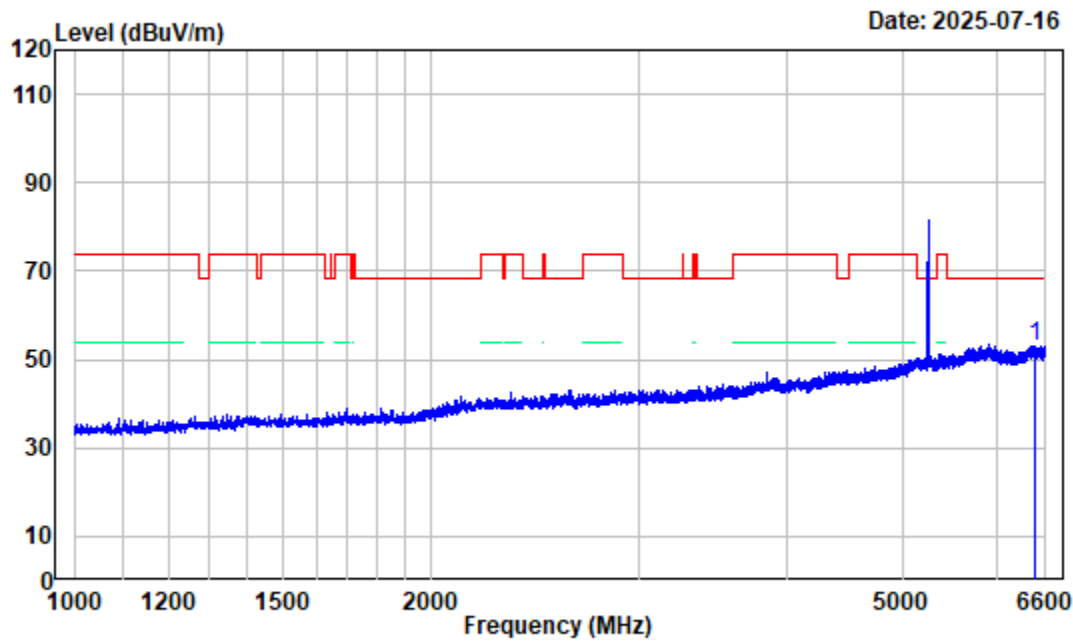

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6469.100	-3.70	56.90	53.20	68.20	-15.00	peak


802.11a Low Channel 1GHz-6.6GHz_VERTICAL

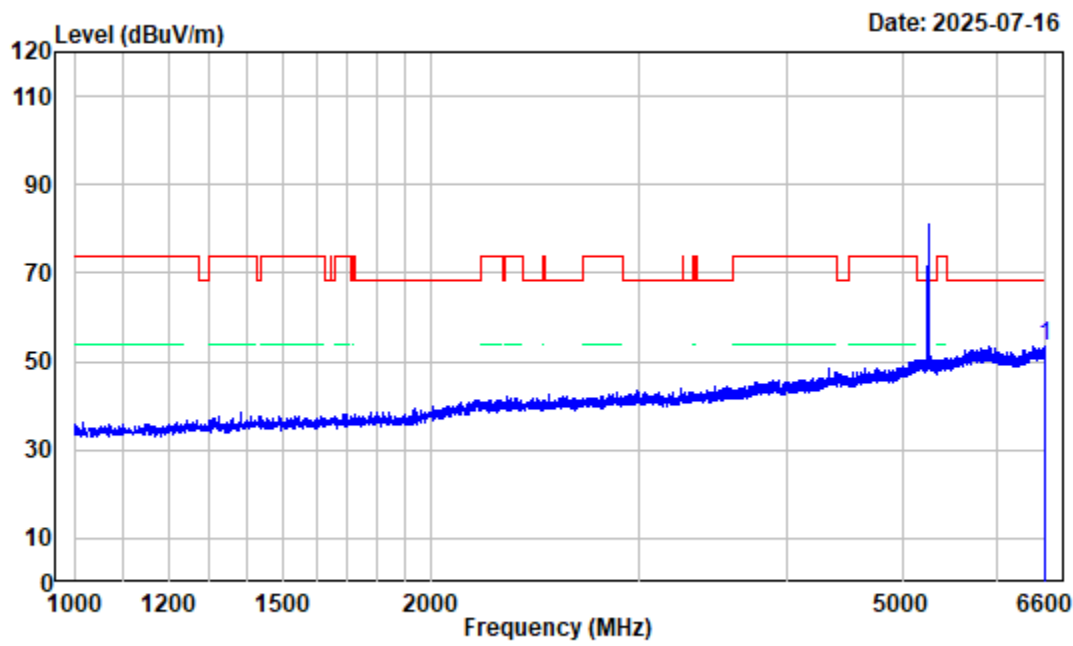

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6599.300	-3.54	56.93	53.39	68.20	-14.81 peak


802.11a Low Channel 6.6GHz-18GHz_HORIZONTAL

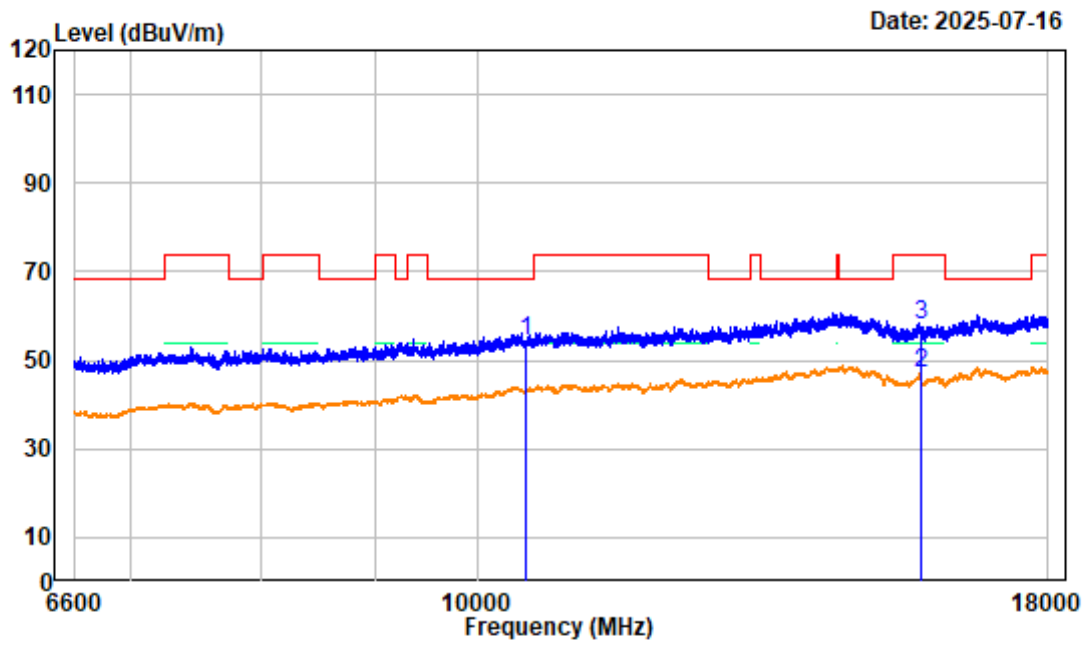

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.000	3.90	50.44	54.34	68.20	-13.86	peak
2 15780.000	5.17	41.97	47.14	54.00	-6.86	average
3 15780.000	5.17	52.99	58.16	74.00	-15.84	peak


802.11a Low Channel 6.6GHz-18GHz_VERTICAL

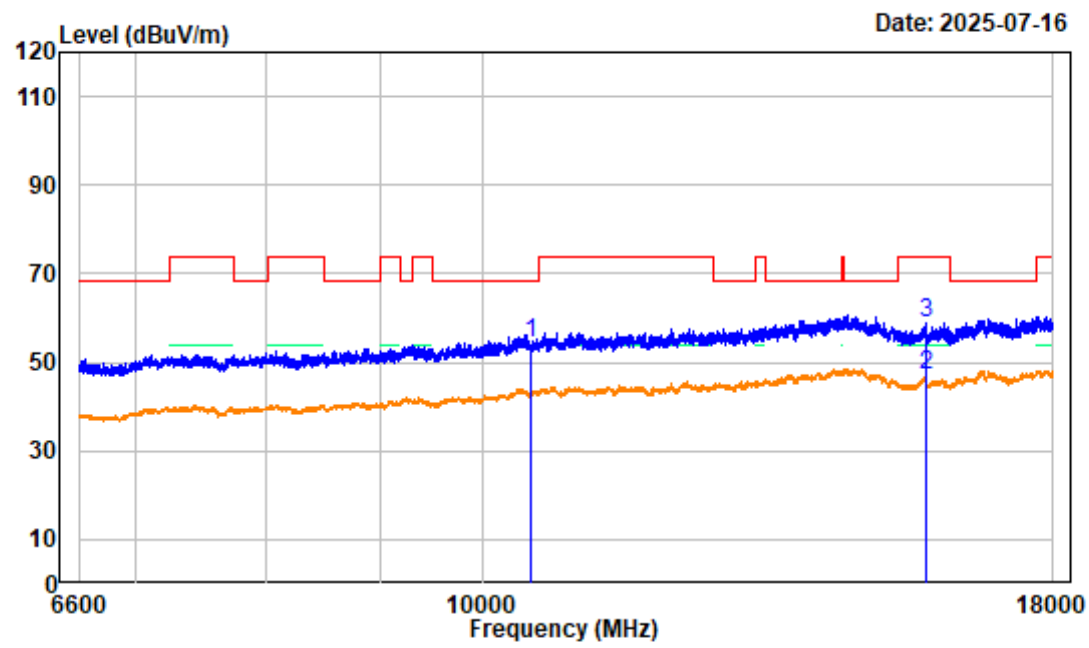

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.000	3.90	50.60	54.50	68.20	-13.70	peak
2 15780.000	5.17	41.78	46.95	54.00	-7.05	average
3 15780.000	5.17	53.80	58.97	74.00	-15.03	peak


802.11a Low Channel Bandedge_HORIZONTAL

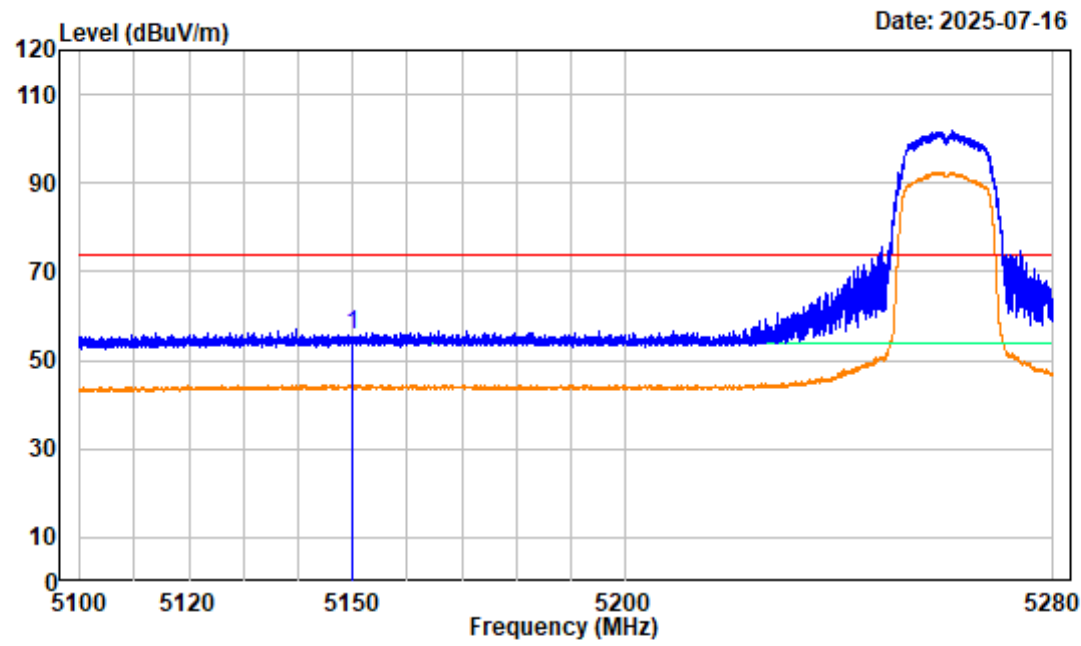

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	61.86	55.87	74.00	-18.13 peak


802.11a Low Channel Bandedge_VERTICAL

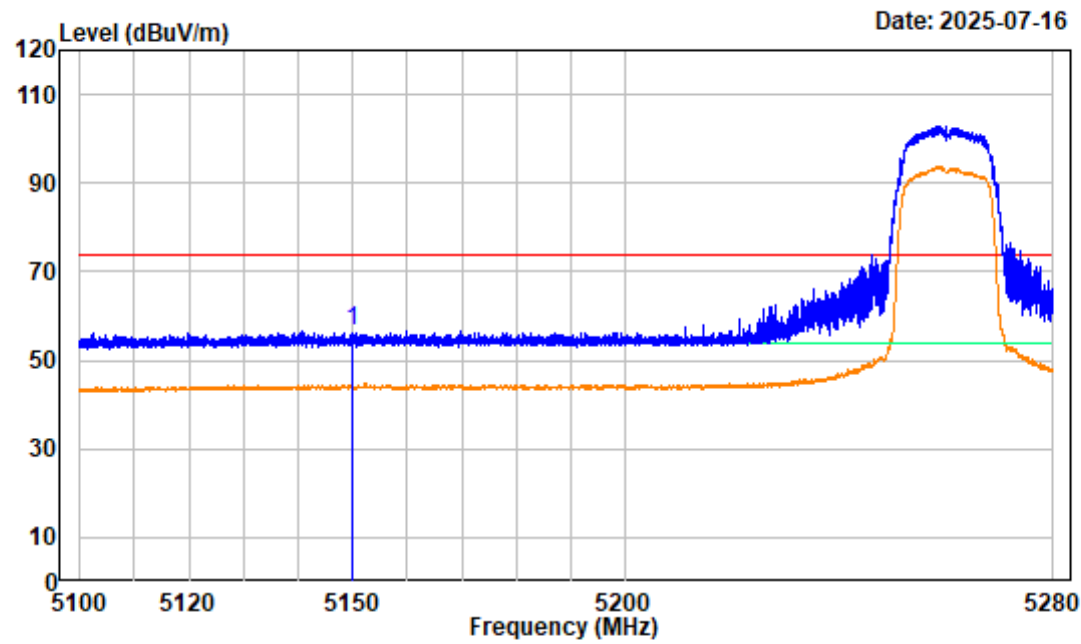

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	62.39	56.40	74.00	-17.60 peak


802.11a Middle Channel 1GHz-6.6GHz_HORIZONTAL

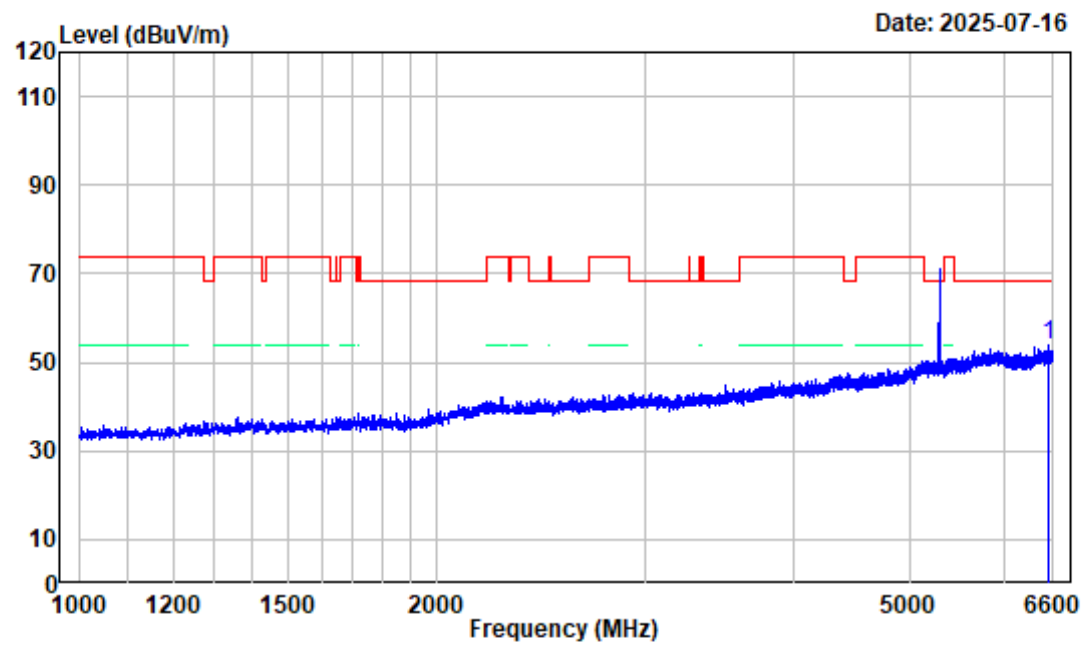

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6545.400	-3.73	57.52	53.79	68.20	-14.41 peak


802.11a Middle Channel 1GHz-6.6GHz_VERTICAL

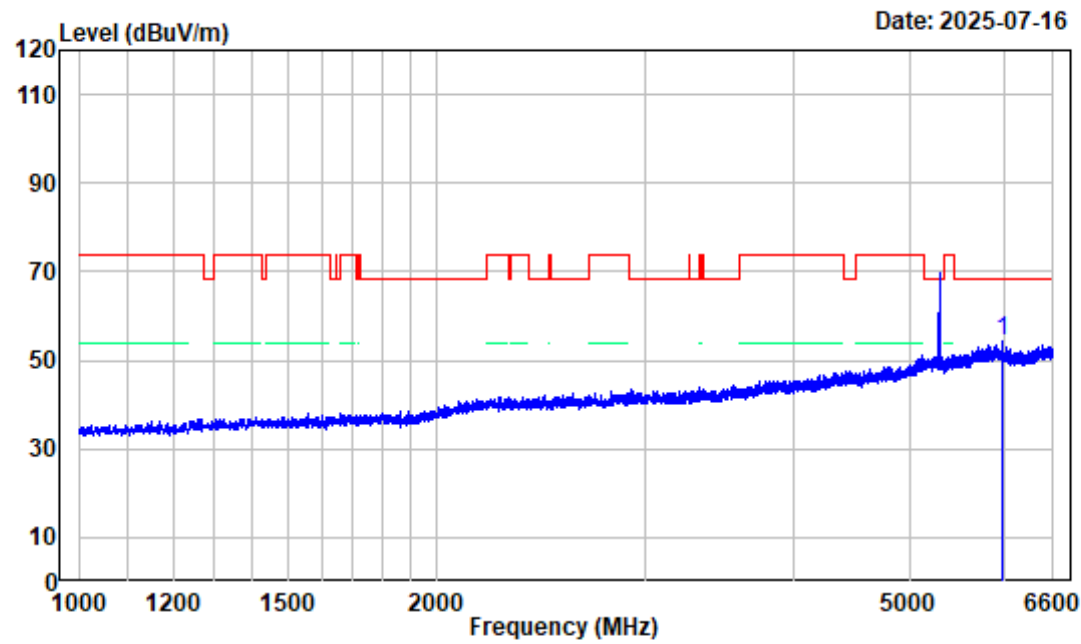

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5979.100	-4.87	59.08	54.21	68.20	-13.99 peak


802.11a Middle Channel 6.6GHz-18GHz_HORIZONTAL

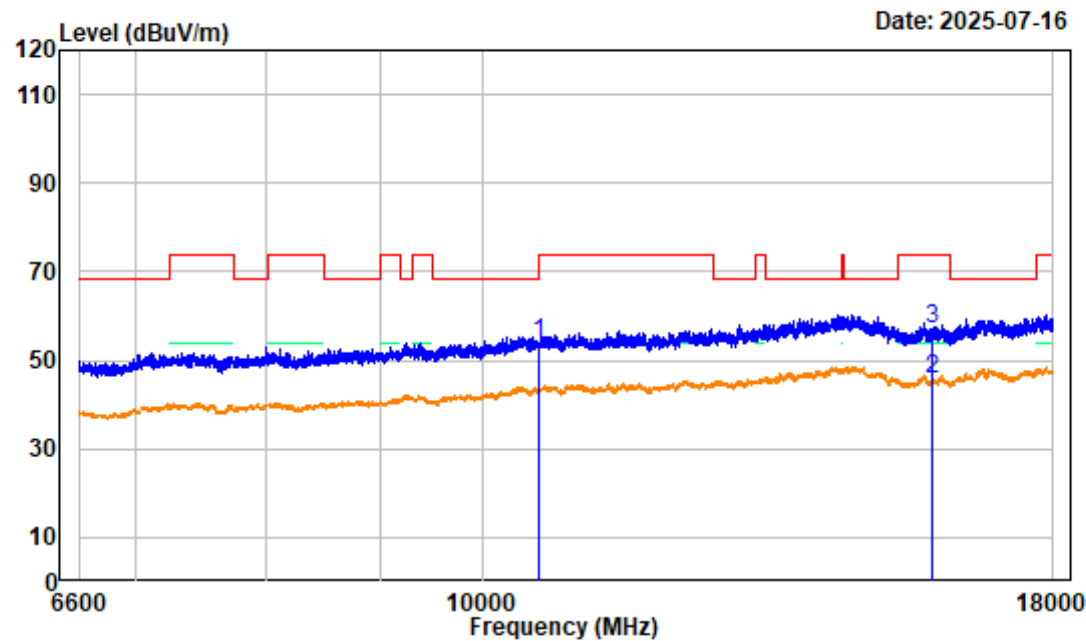

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10600.000	3.86	50.07	53.93	68.20	-14.27	peak
2 15900.000	5.15	40.76	45.91	54.00	-8.09	average
3 15900.000	5.15	51.76	56.91	74.00	-17.09	peak


802.11a Middle Channel 6.6GHz-18GHz_VERTICAL

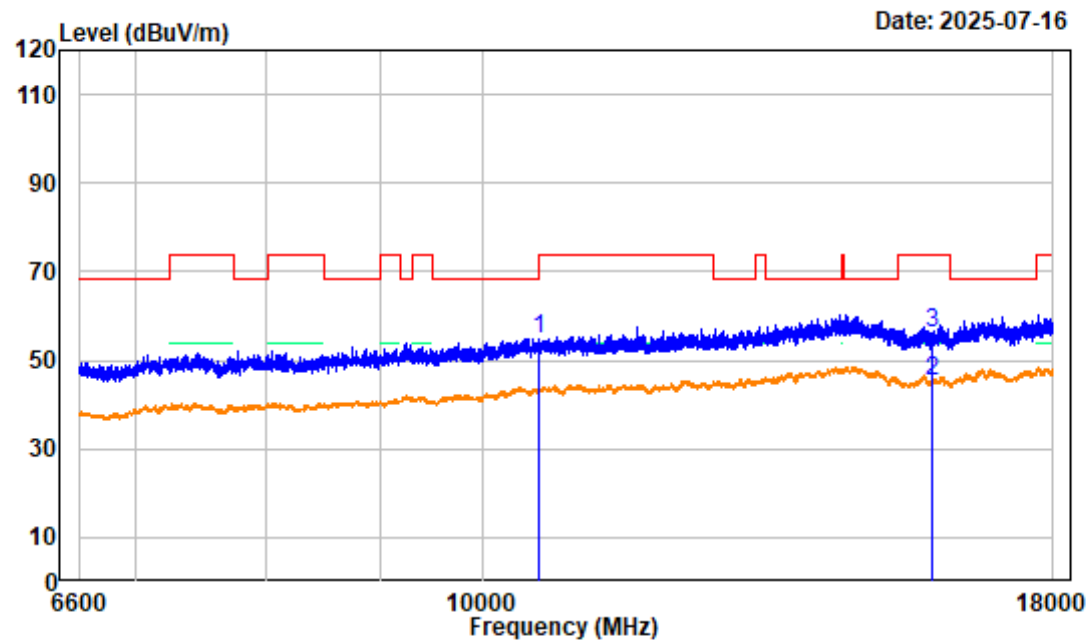

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10600.000	3.86	50.75	54.61	68.20	-13.59	peak
2 15900.000	5.15	40.21	45.36	54.00	-8.64	average
3 15900.000	5.15	51.20	56.35	74.00	-17.65	peak


802.11a High Channel 1GHz-6.6GHz_HORIZONTAL

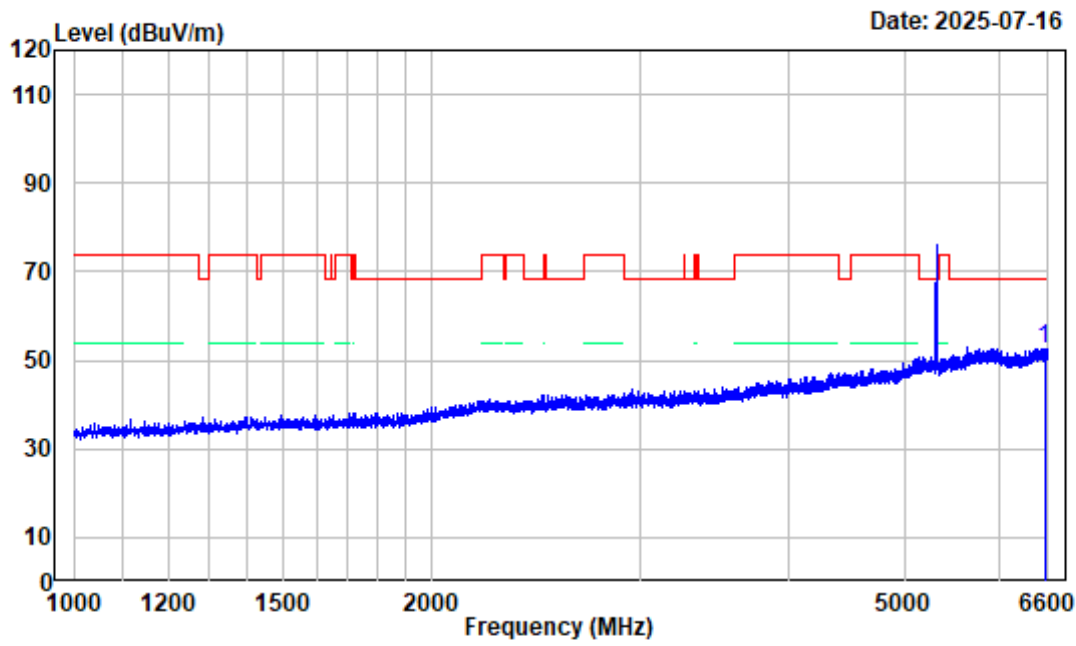

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6554.500	-3.70	56.33	52.63	68.20	-15.57 peak


802.11a High Channel 1GHz-6.6GHz_VERTICAL

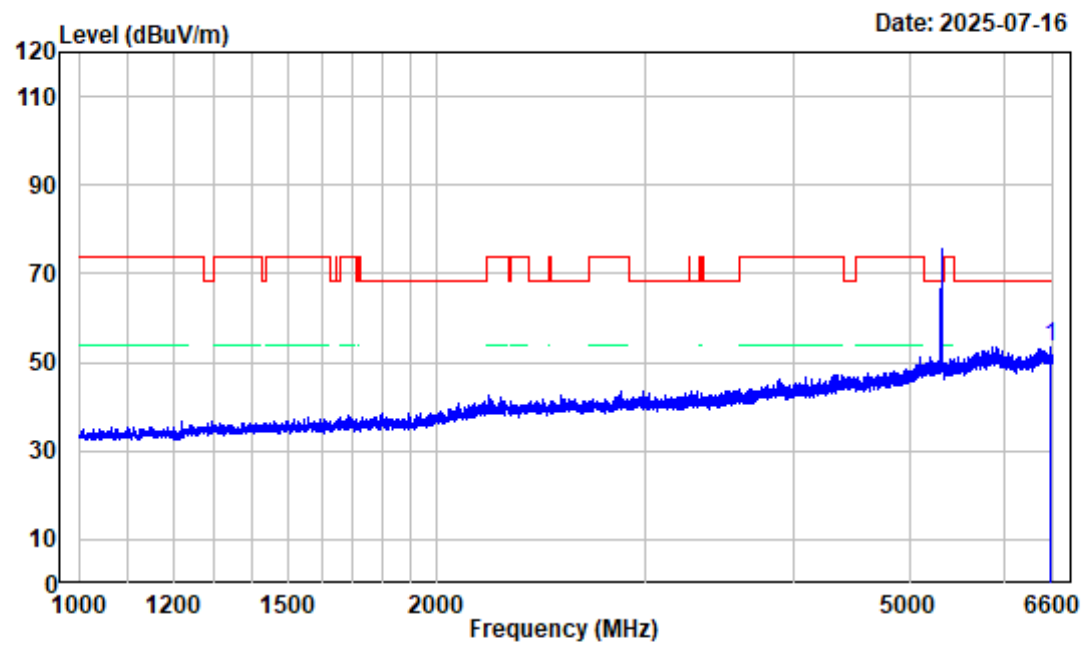

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6562.900	-3.67	56.92	53.25	68.20	-14.95 peak


802.11a High Channel 6.6GHz-18GHz_HORIZONTAL

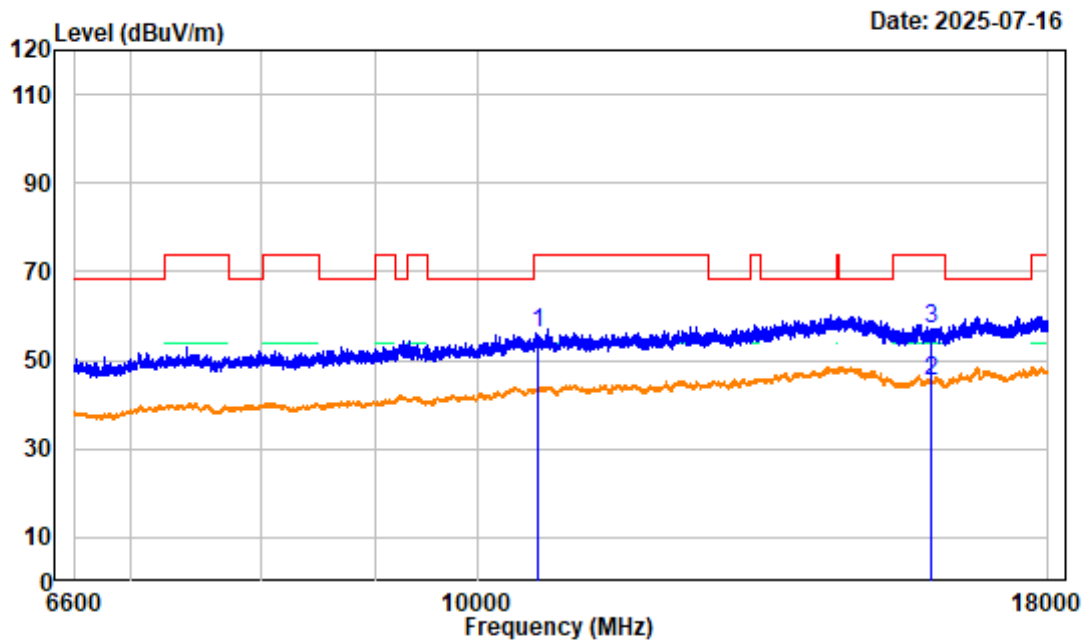

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	4.42	51.94	56.36	74.00	-17.64	peak
2 15960.000	4.76	40.31	45.07	54.00	-8.93	average
3 15960.000	4.76	52.30	57.06	74.00	-16.94	peak


802.11a High Channel 6.6GHz-18GHz_VERTICAL

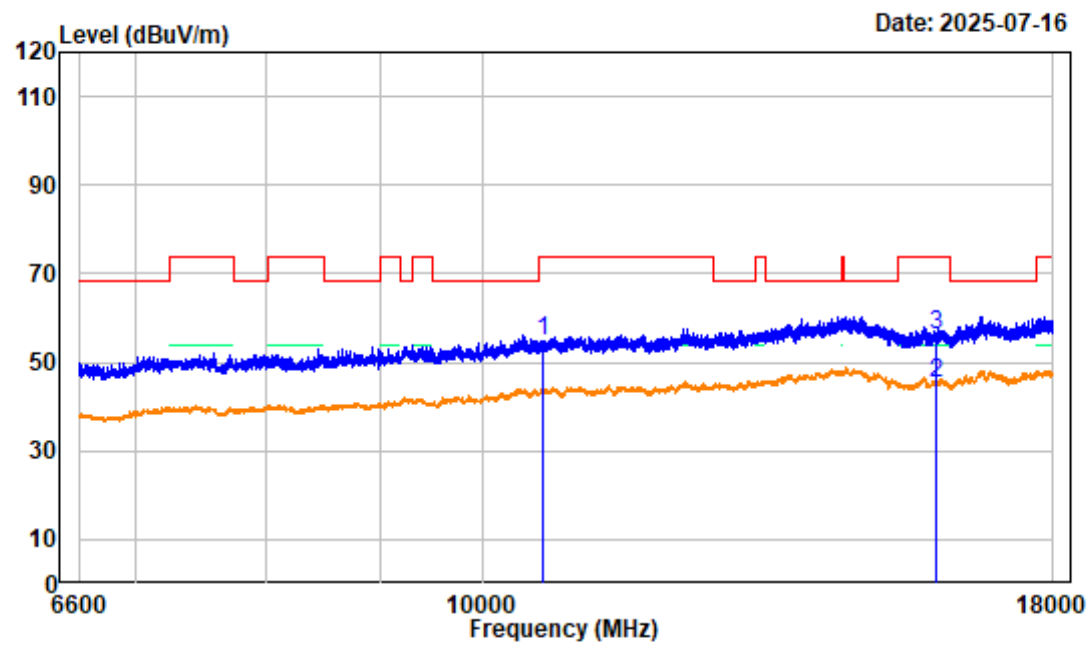

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	4.42	50.49	54.91	74.00	-19.09	peak
2 15960.000	4.76	40.49	45.25	54.00	-8.75	average
3 15960.000	4.76	51.46	56.22	74.00	-17.78	peak

802.11a High Channel Bandedge_HORIZONTAL

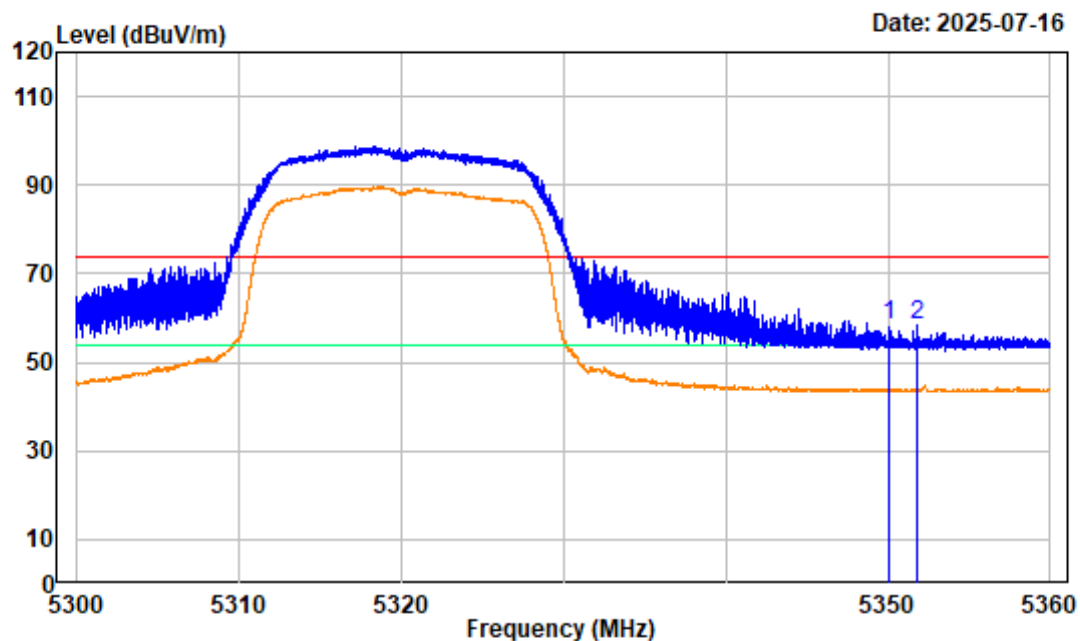

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11a High Channel 5320MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	64.11	58.30	74.00	-15.70	peak
2	5351.728	-5.81	64.11	58.30	74.00	-15.70	Peak


802.11a High Channel Bandedge_VERTICAL

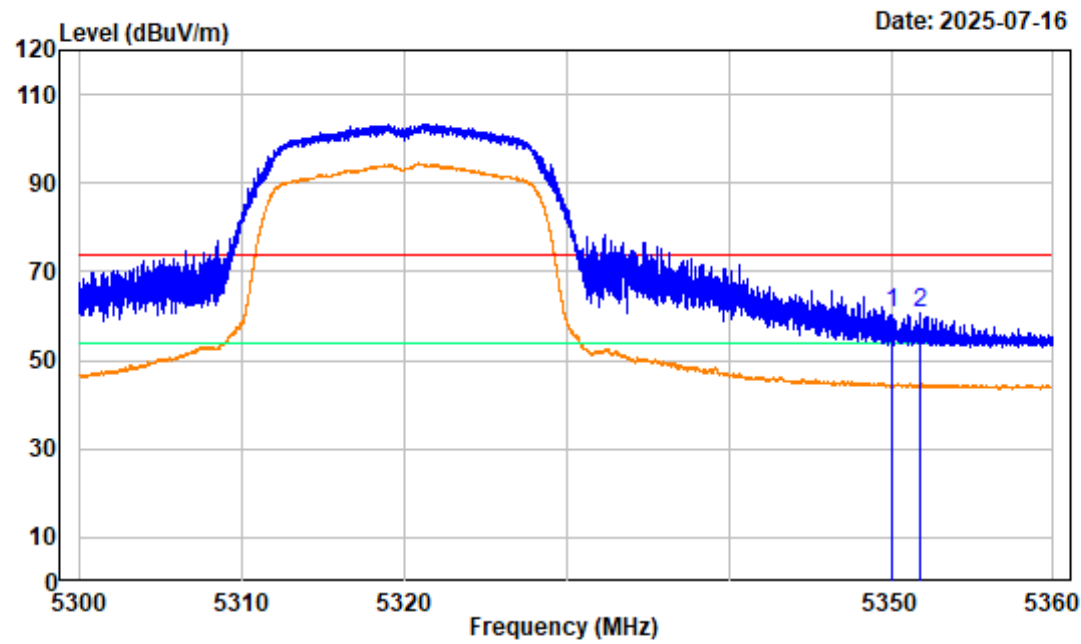

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	66.44	60.63	74.00	-13.37 peak
2	5351.743	-5.81	66.44	60.63	74.00	-13.37 Peak


802.11ac20 Low Channel 1GHz-6.6GHz_HORIZONTAL

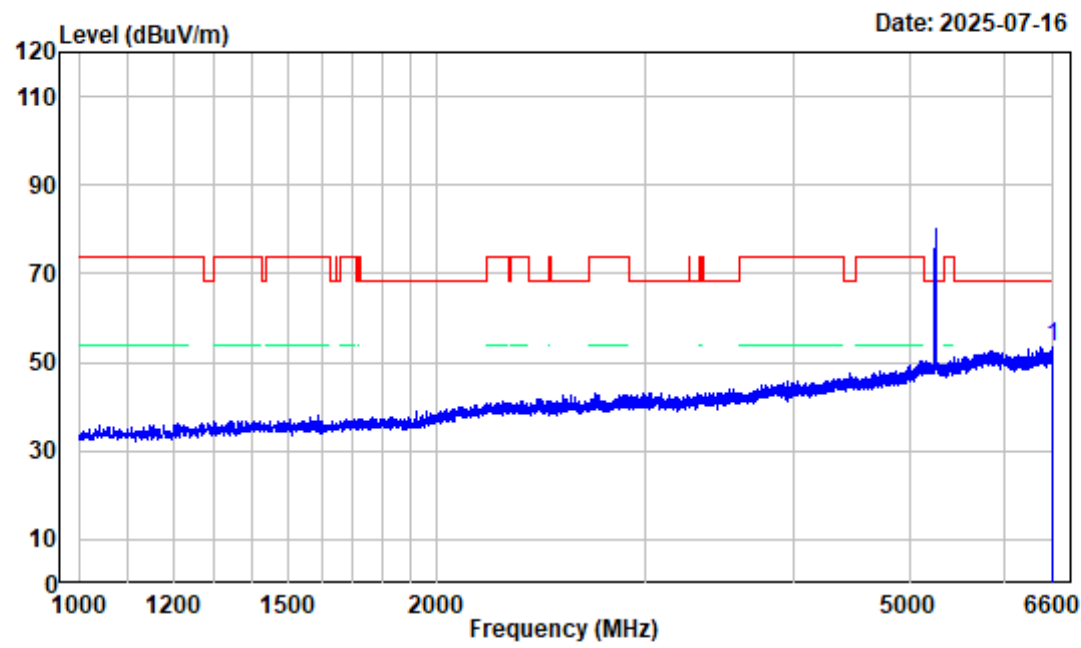

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6585.300	-3.60	57.19	53.59	68.20	-14.61 peak


802.11ac20 Low Channel 1GHz-6.6GHz_VERTICAL

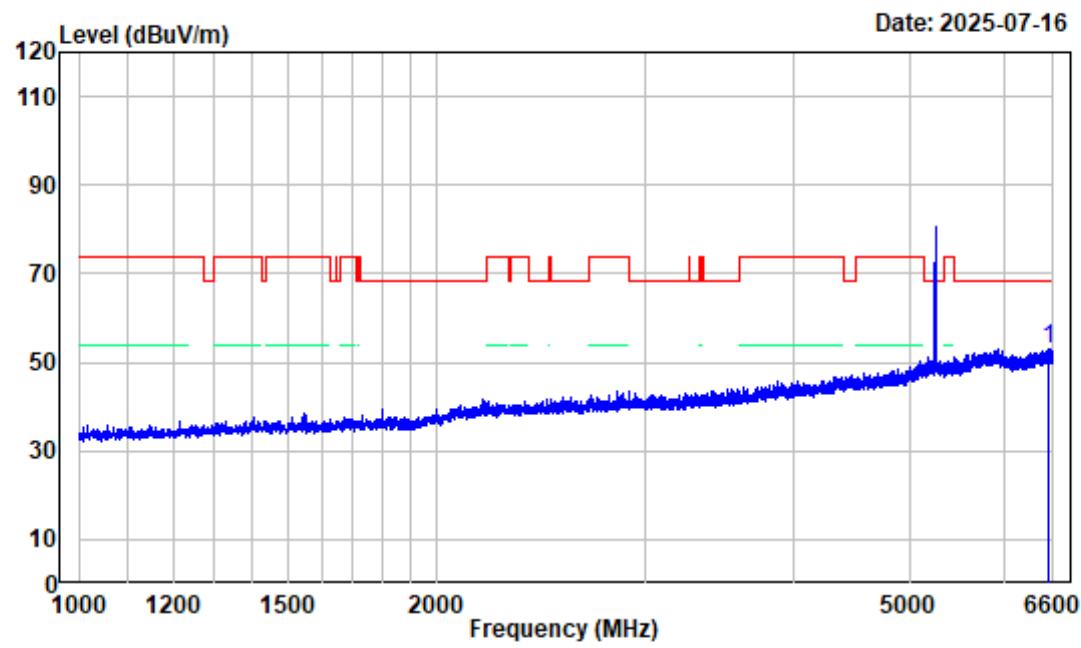

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6530.700	-3.76	56.71	52.95	68.20	-15.25 peak


802.11ac20 Low Channel 6.6GHz-18GHz_HORIZONTAL

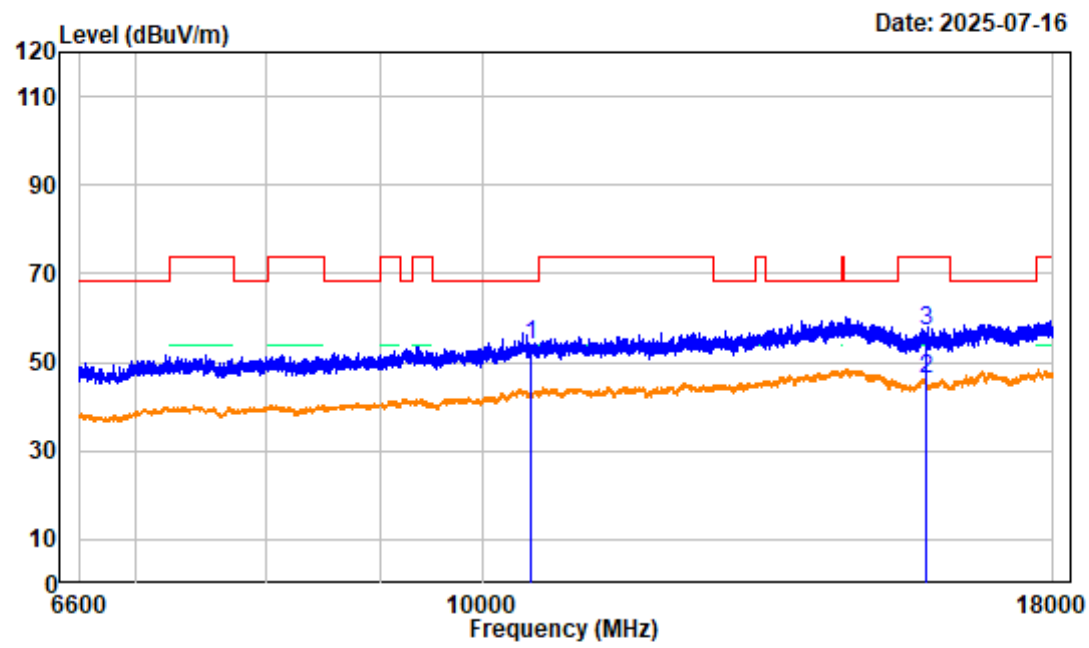

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.000	3.90	50.11	54.01	68.20	-14.19	peak
2 15780.000	5.17	40.89	46.06	54.00	-7.94	average
3 15780.000	5.17	51.91	57.08	74.00	-16.92	peak


802.11ac20 Low Channel 6.6GHz-18GHz_VERTICAL

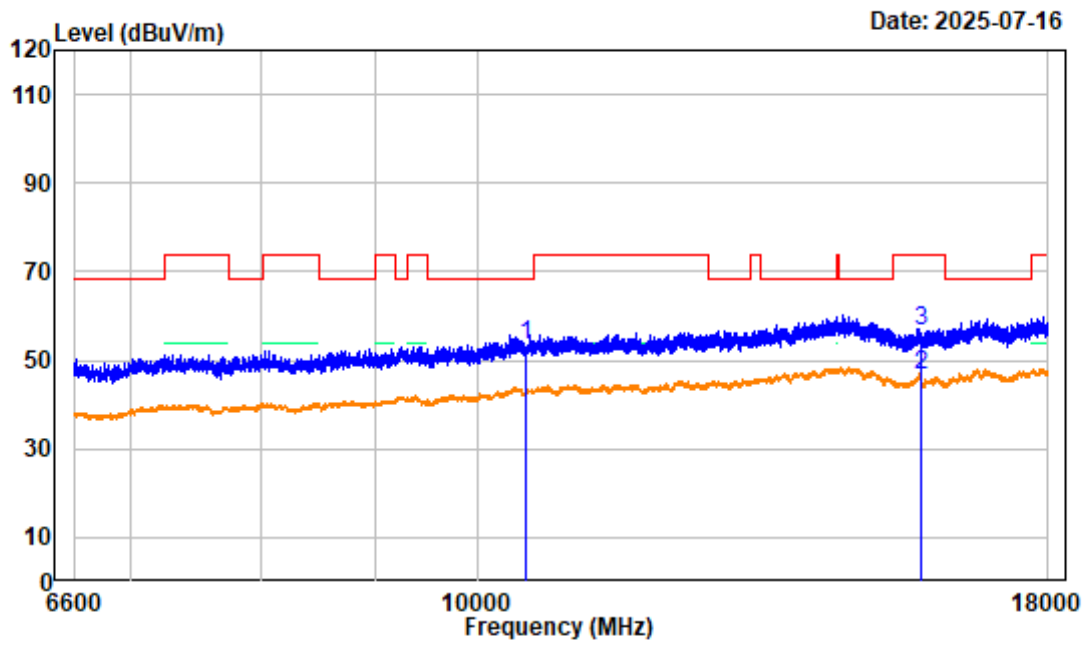

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.000	3.90	49.60	53.50	68.20	-14.70	peak
2 15780.000	5.17	41.36	46.53	54.00	-7.47	average
3 15780.000	5.17	51.35	56.52	74.00	-17.48	peak


802.11ac20 Low Channel Bandedge_HORIZONTAL

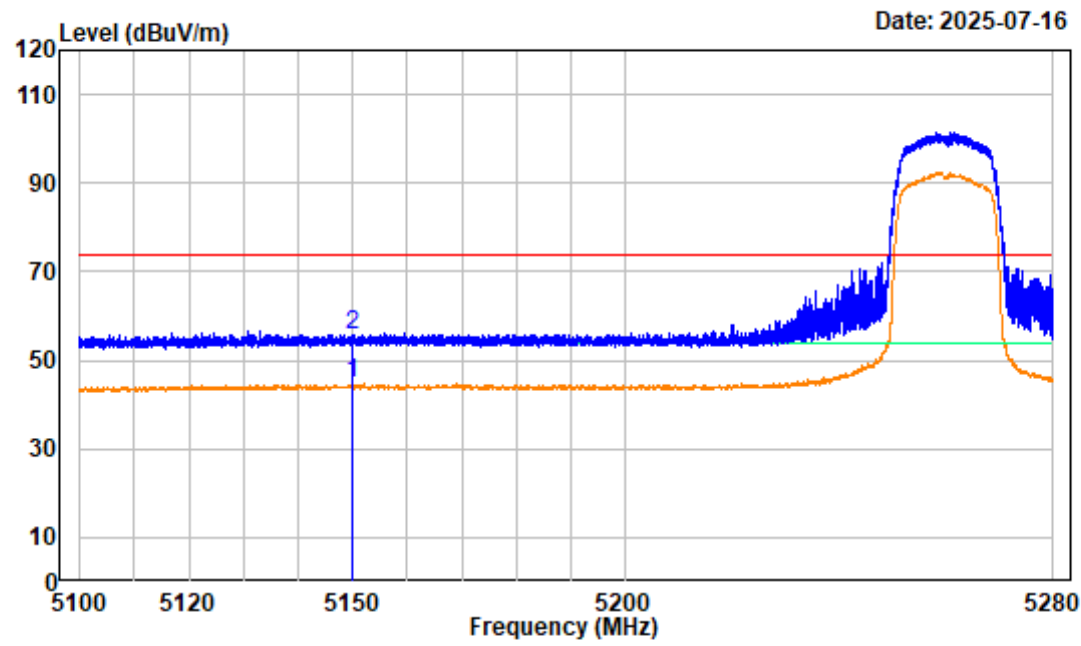

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.83	44.84	54.00	-9.16 average
2	5150.000	-5.99	61.85	55.86	74.00	-18.14 peak


802.11ac20 Low Channel Bandedge_VERTICAL

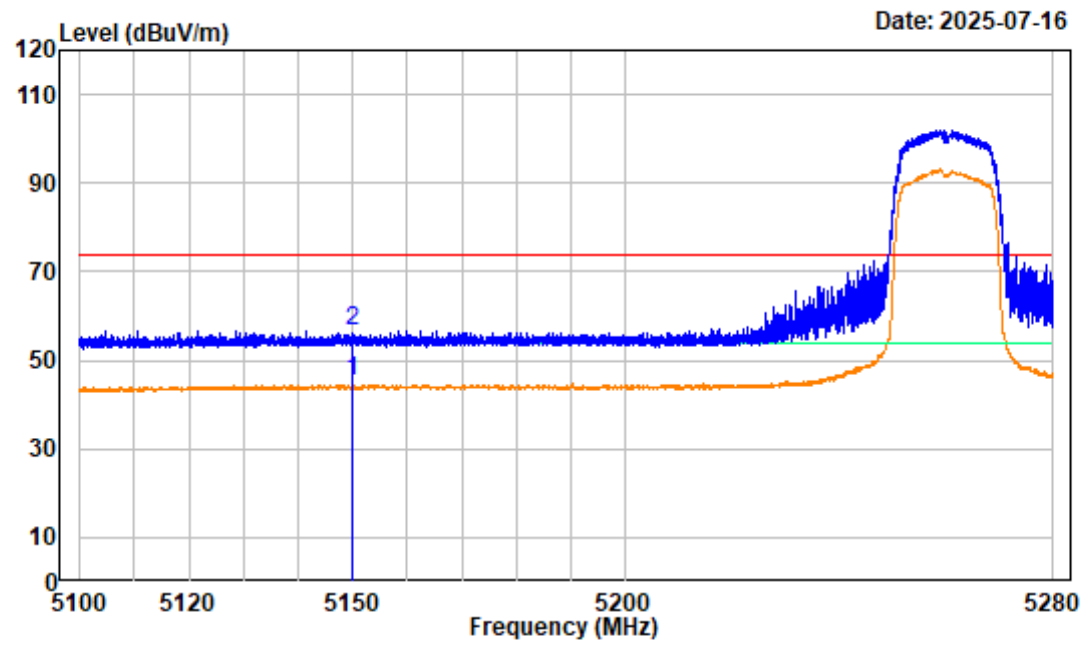

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.38	45.39	54.00	-8.61 average
2	5150.000	-5.99	62.39	56.40	74.00	-17.60 peak


802.11ac20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

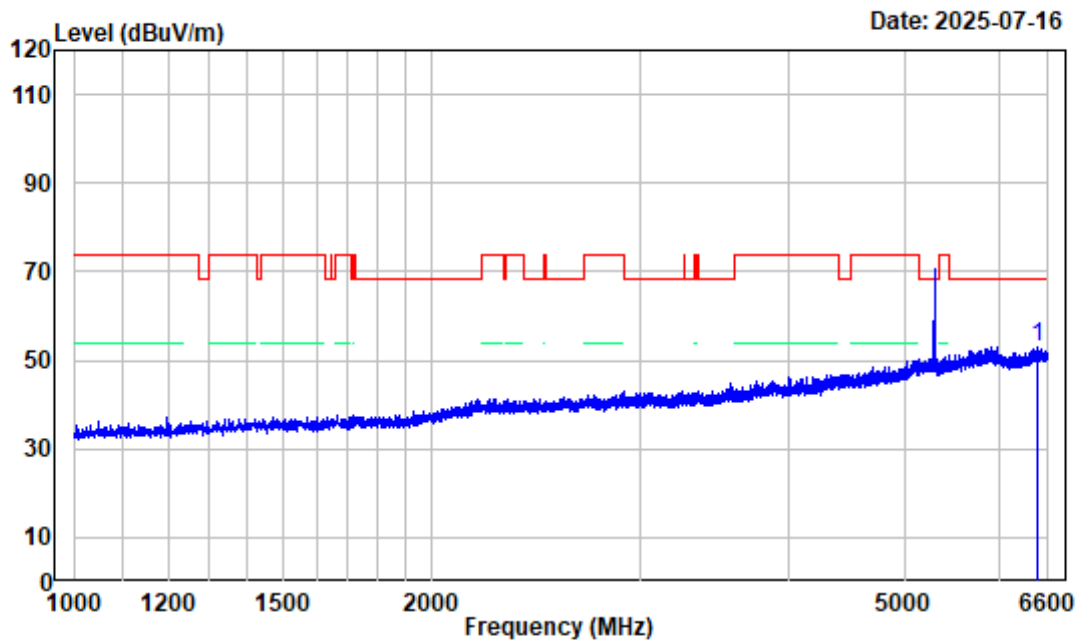

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6460.700	-3.65	56.48	52.83	68.20	-15.37	peak


802.11ac20 Middle Channel 1GHz-6.6GHz_VERTICAL

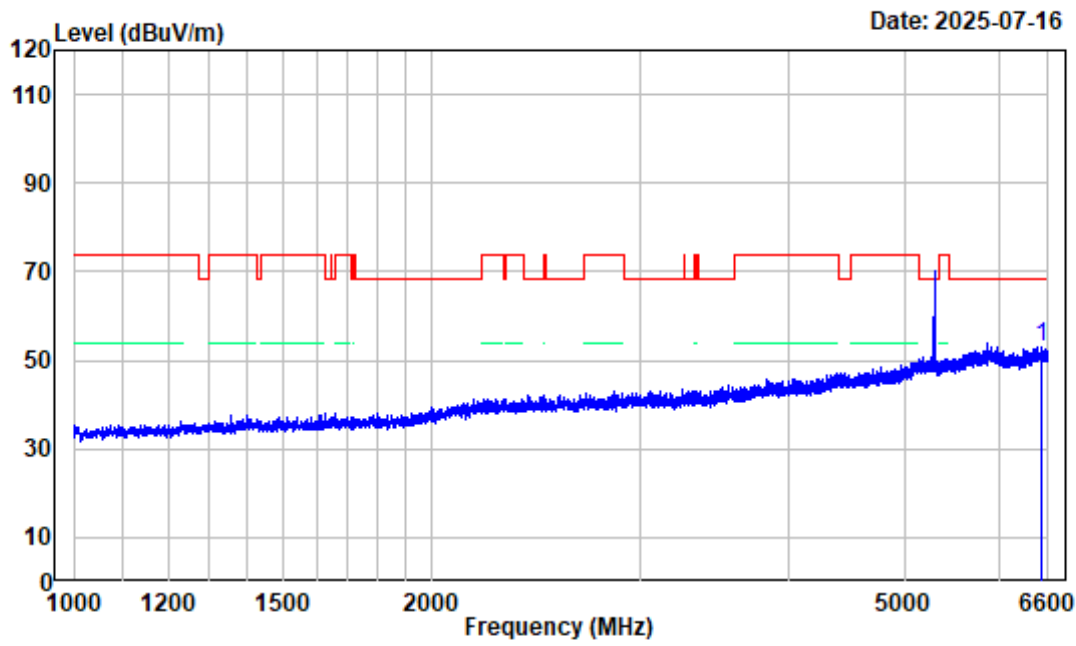

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6512.500	-3.78	56.80	53.02	68.20	-15.18	peak

802.11ac20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

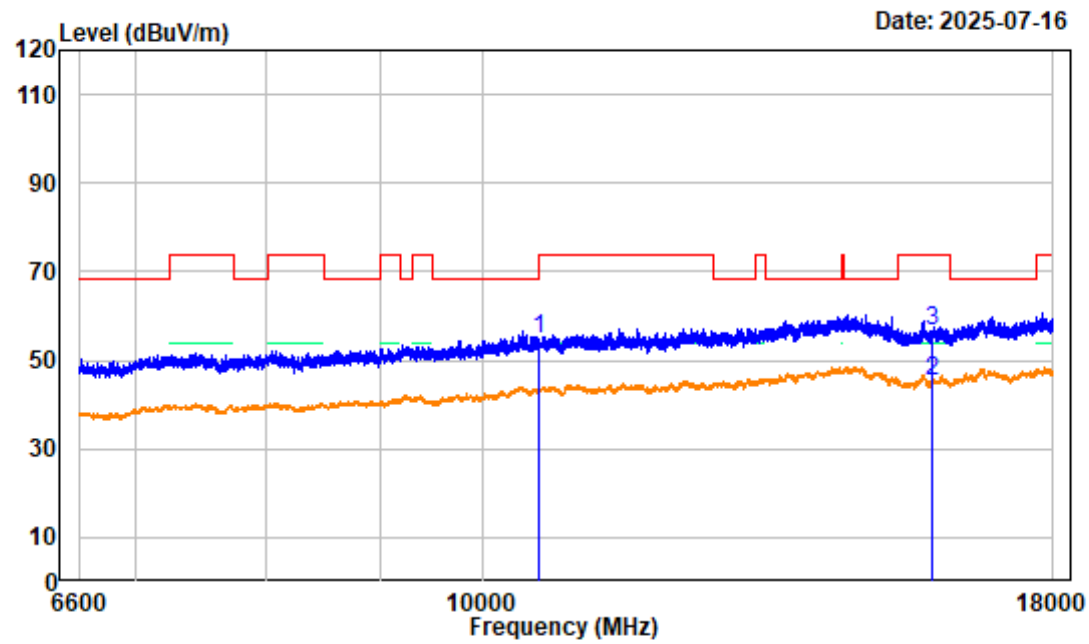

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11ac20 Middle Channel 5300MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10600.000	3.86	50.87	54.73	68.20	-13.47	peak
2 15900.000	5.15	40.27	45.42	54.00	-8.58	average
3 15900.000	5.15	51.30	56.45	74.00	-17.55	peak


802.11ac20 Middle Channel 6.6GHz-18GHz_VERTICAL

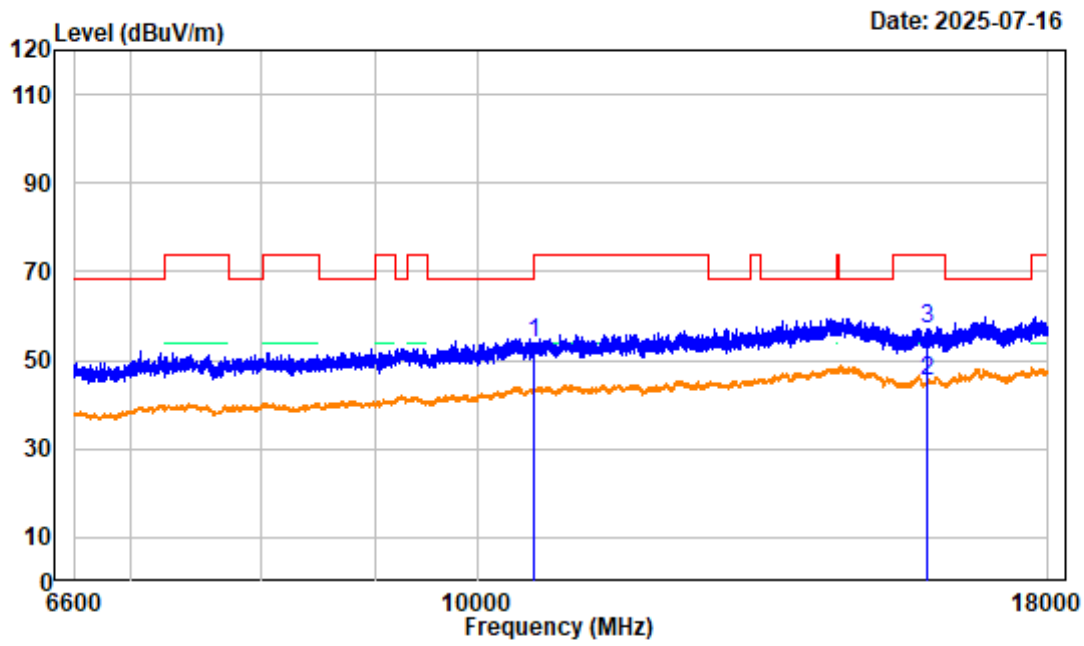

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10600.000	3.86	50.09	53.95	68.20	-14.25	peak
2 15900.000	5.15	39.95	45.10	54.00	-8.90	average
3 15900.000	5.15	51.94	57.09	74.00	-16.91	peak


802.11ac20 High Channel 1GHz-6.6GHz_HORIZONTAL

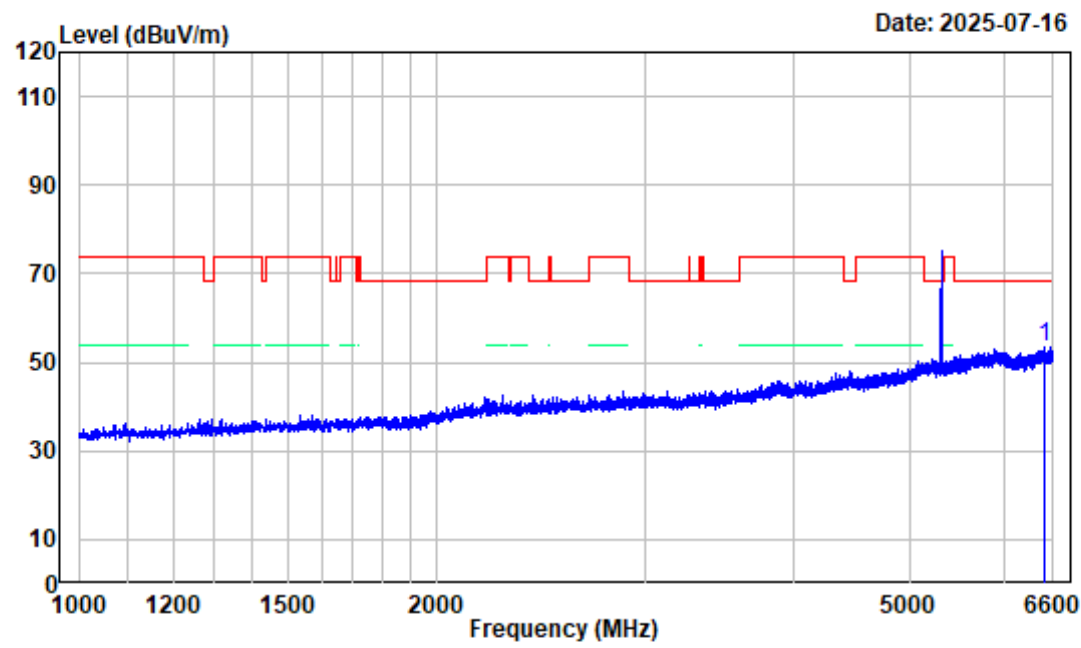

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6484.500	-3.75	57.15	53.40	68.20	-14.80 peak


802.11ac20 High Channel 1GHz-6.6GHz_VERTICAL

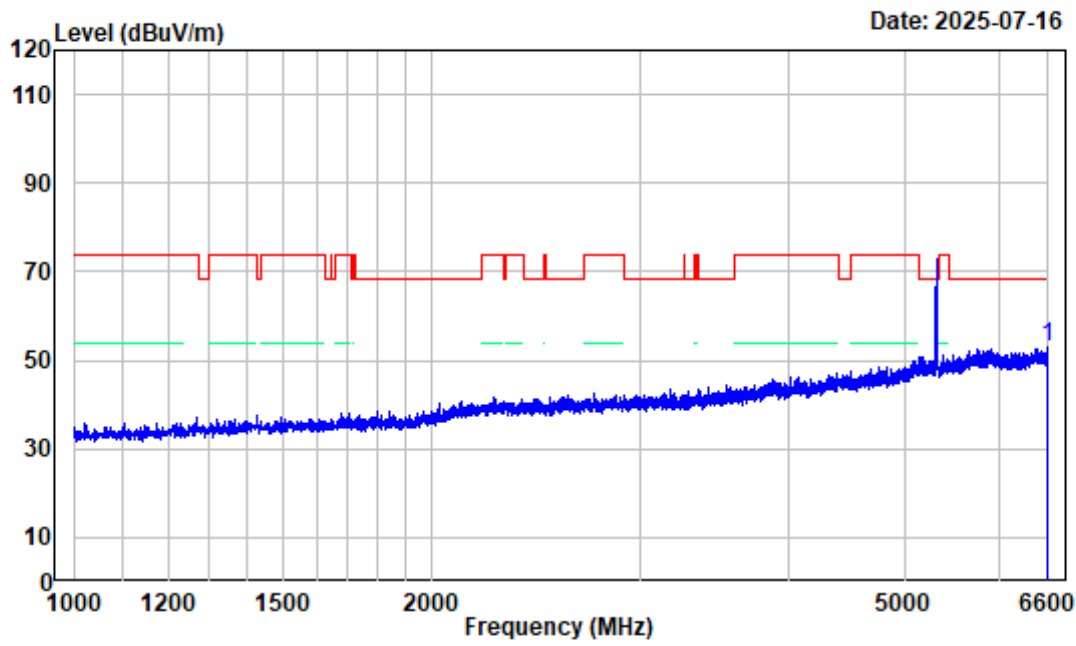

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6582.500	-3.60	56.72	53.12	68.20	-15.08 peak


802.11ac20 High Channel 6.6GHz-18GHz_HORIZONTAL

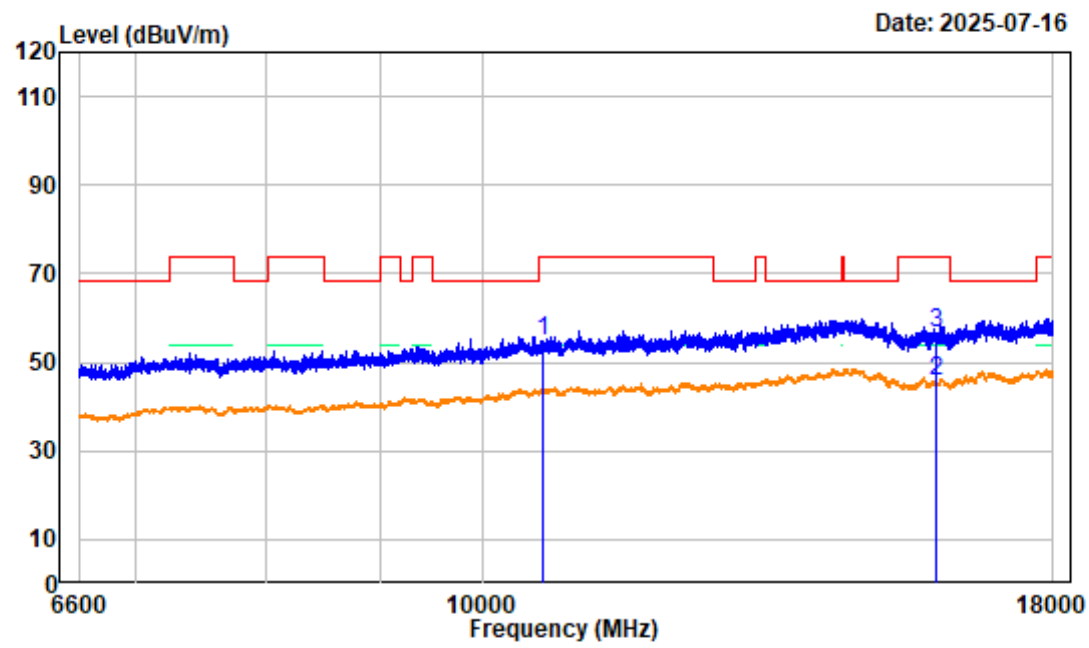

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	4.42	50.47	54.89	74.00	-19.11	peak
2 15960.000	4.76	40.89	45.65	54.00	-8.35	average
3 15960.000	4.76	51.91	56.67	74.00	-17.33	peak


802.11ac20 High Channel 6.6GHz-18GHz_VERTICAL

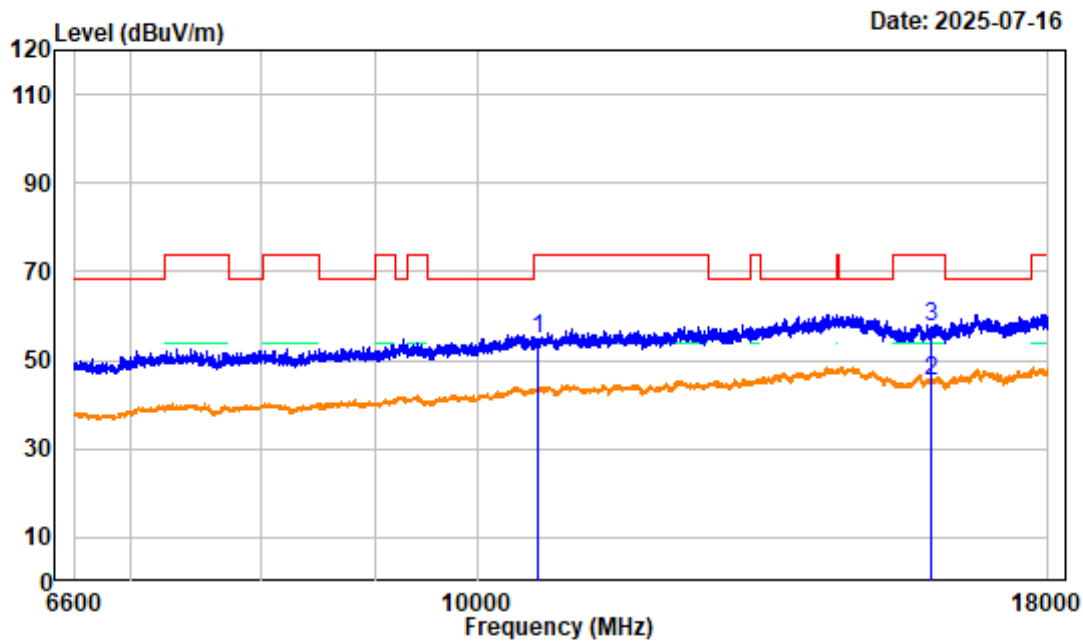

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	4.42	50.48	54.90	74.00	-19.10	peak
2 15960.000	4.76	40.64	45.40	54.00	-8.60	average
3 15960.000	4.76	52.70	57.46	74.00	-16.54	peak


802.11ac20 High Channel Bandedge_HORIZONTAL

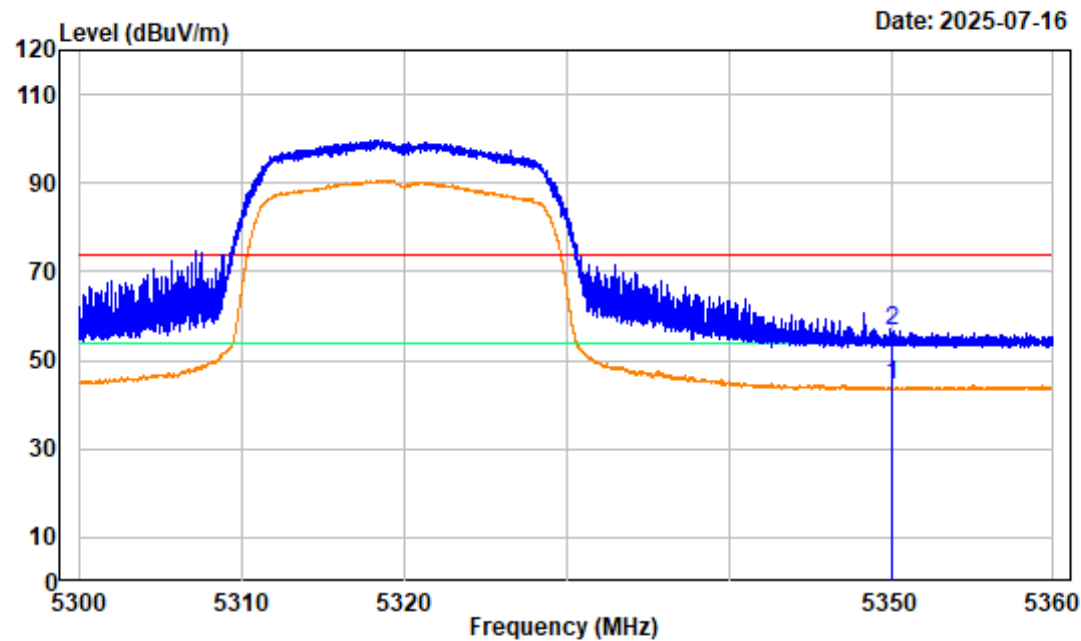

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.36	44.55	54.00	-9.45 average
2	5350.000	-5.81	62.33	56.52	74.00	-17.48 peak


802.11ac20 High Channel Bandedge_VERTICAL

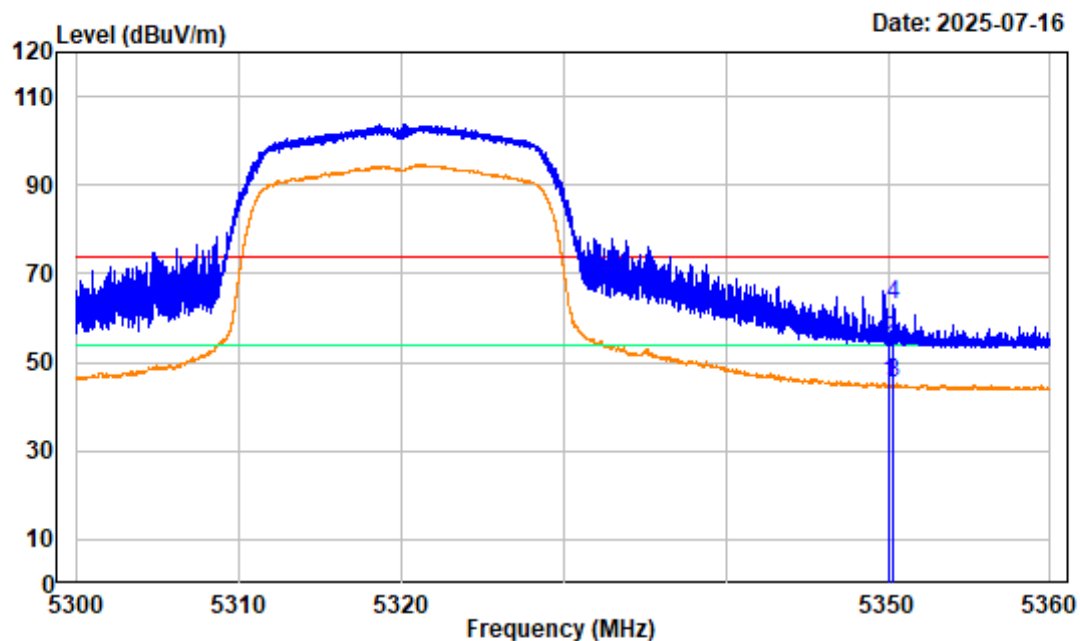

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5320MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.96	45.15	54.00	-8.85	average
2	5350.000	-5.81	60.70	54.89	74.00	-19.11	peak
3	5350.340	-5.81	50.94	45.13	54.00	-8.87	Average
4	5350.340	-5.81	68.93	63.12	74.00	-10.88	Peak


802.11ac40 Low Channel 1GHz-6.6GHz_HORIZONTAL

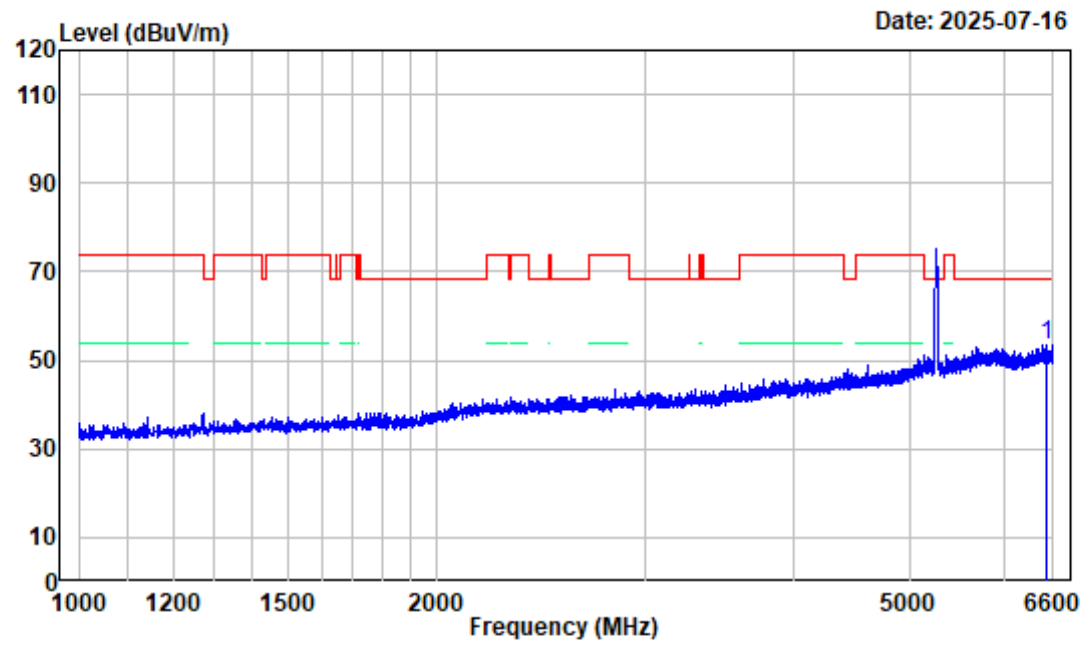

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5270MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6520.200	-3.78	57.32	53.54	68.20	-14.66	peak


802.11ac40 Low Channel 1GHz-6.6GHz_VERTICAL

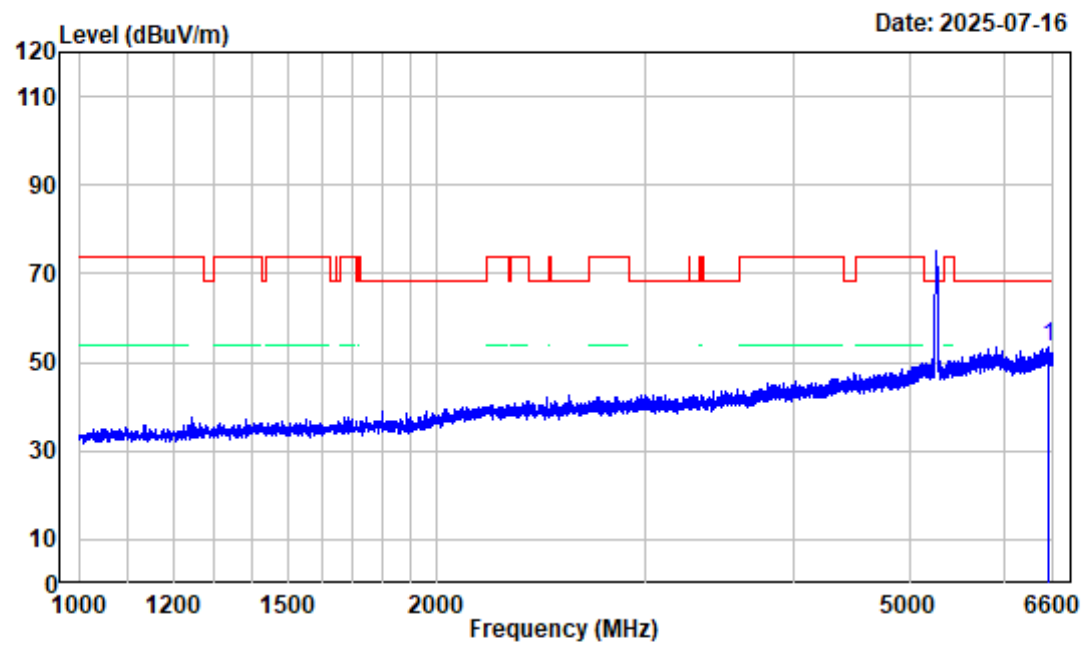

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5270MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6541.200	-3.74	57.29	53.55	68.20	-14.65 peak


802.11ac40 Low Channel 6.6GHz-18GHz_HORIZONTAL

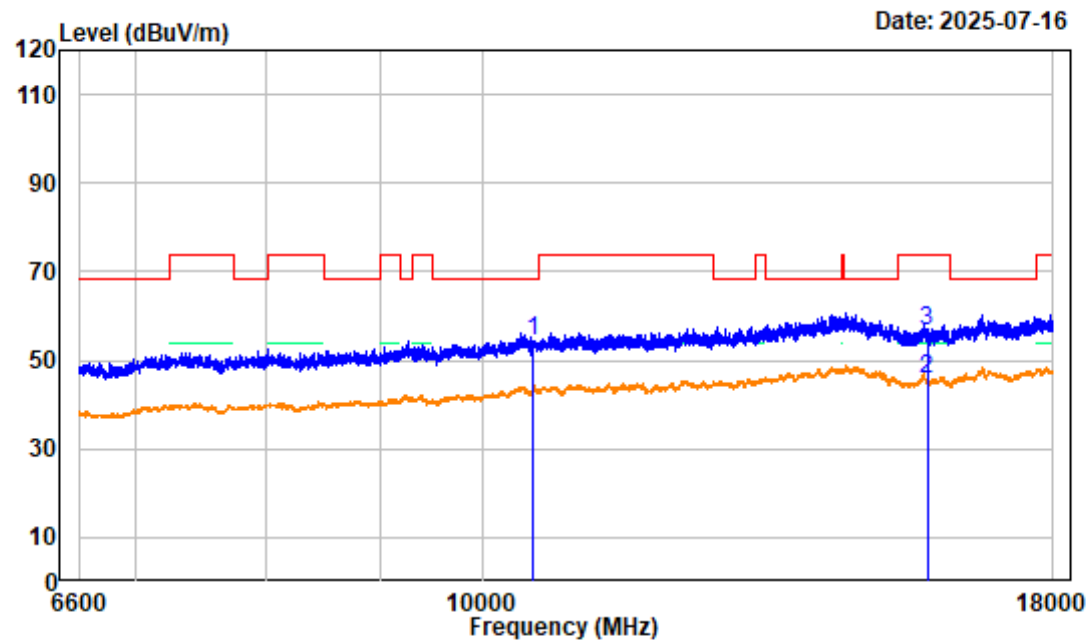

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5270MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10540.000	4.11	50.22	54.33	68.20	-13.87	peak
2 15810.000	5.10	40.61	45.71	54.00	-8.29	average
3 15810.000	5.10	51.64	56.74	74.00	-17.26	peak


802.11ac40 Low Channel 6.6GHz-18GHz_VERTICAL

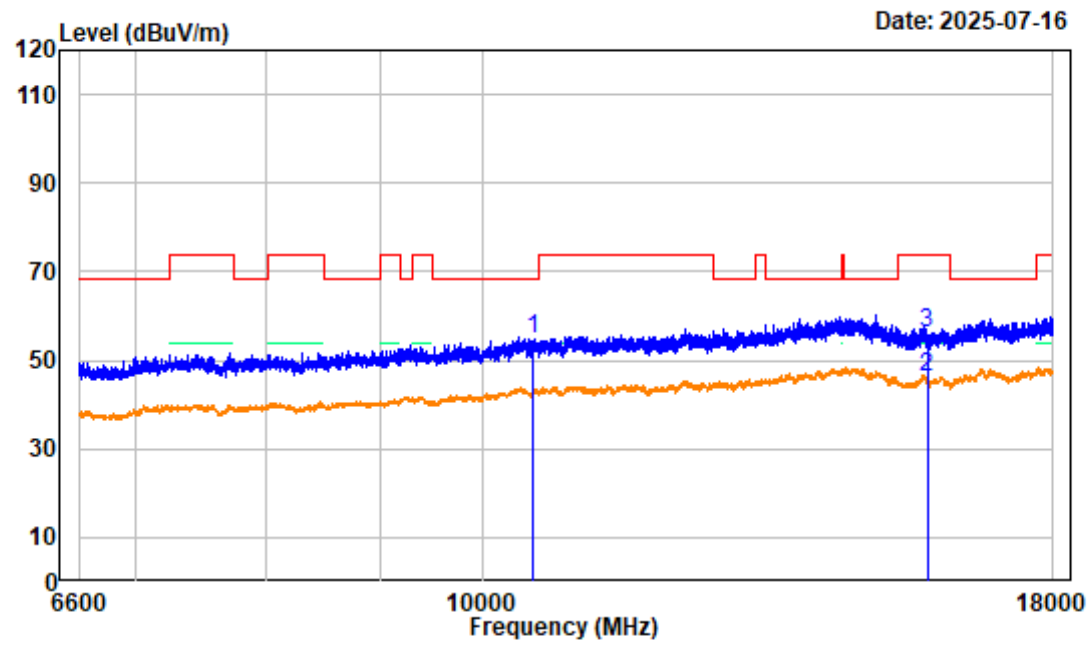

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5270MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10540.000	4.11	50.73	54.84	68.20	-13.36	peak
2 15810.000	5.10	41.00	46.10	54.00	-7.90	average
3 15810.000	5.10	50.93	56.03	74.00	-17.97	peak


802.11ac40 Low Channel Bandedge_HORIZONTAL

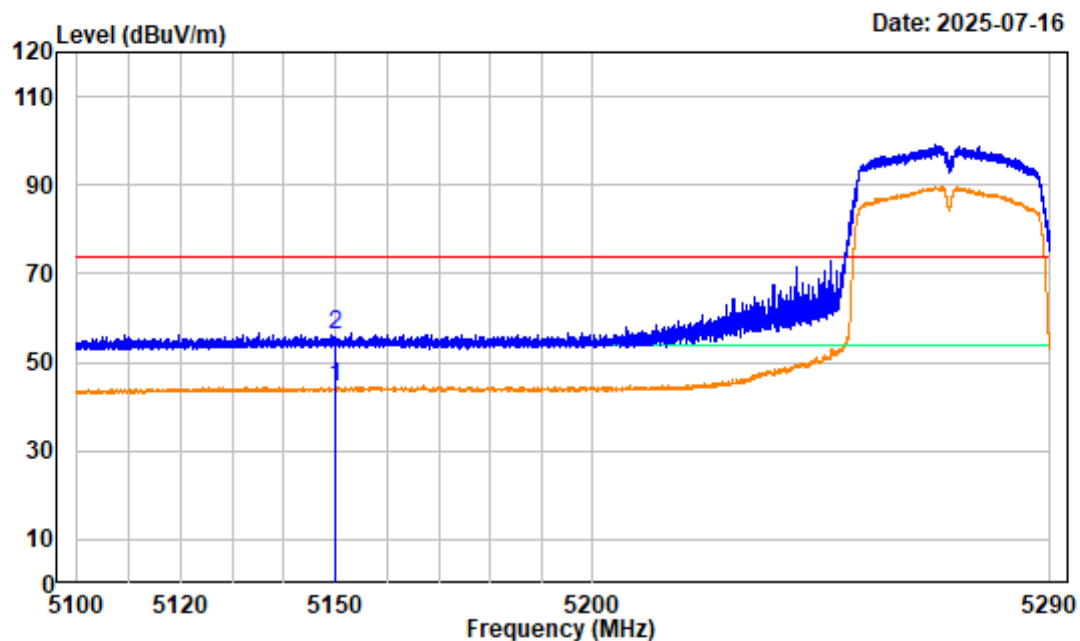

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5270MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.17	44.18	54.00	-9.82	average
2	5150.000	-5.99	62.16	56.17	74.00	-17.83	peak


802.11ac40 Low Channel Bandedge_VERTICAL

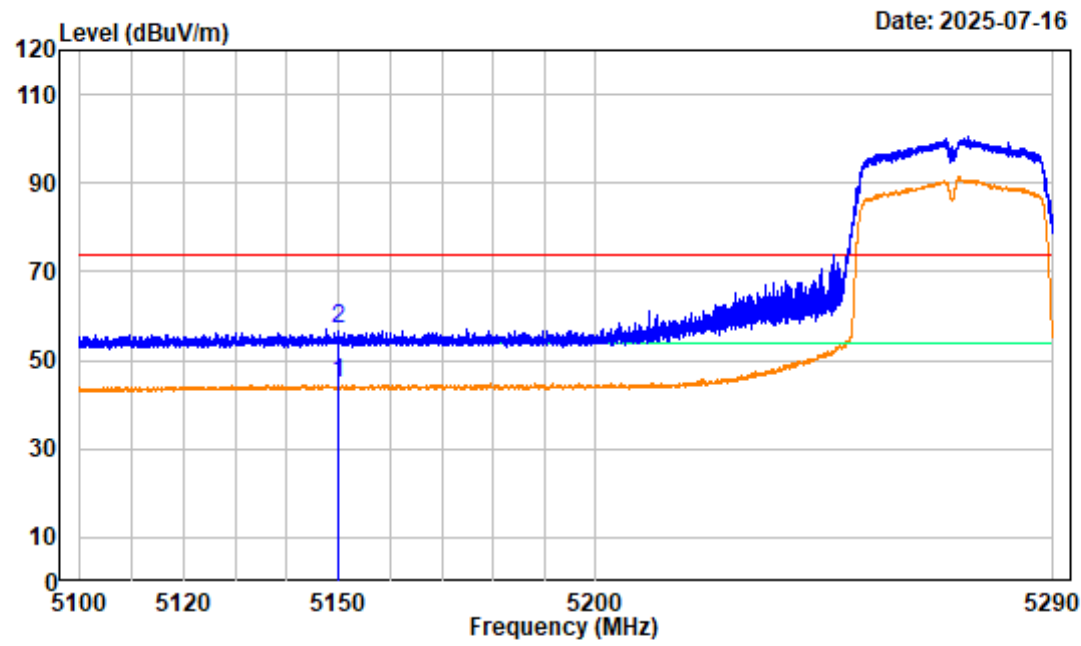

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5270MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.91	44.92	54.00	-9.08 average
2	5150.000	-5.99	62.91	56.92	74.00	-17.08 peak


802.11ac40 High Channel 1GHz-6.6GHz_HORIZONTAL

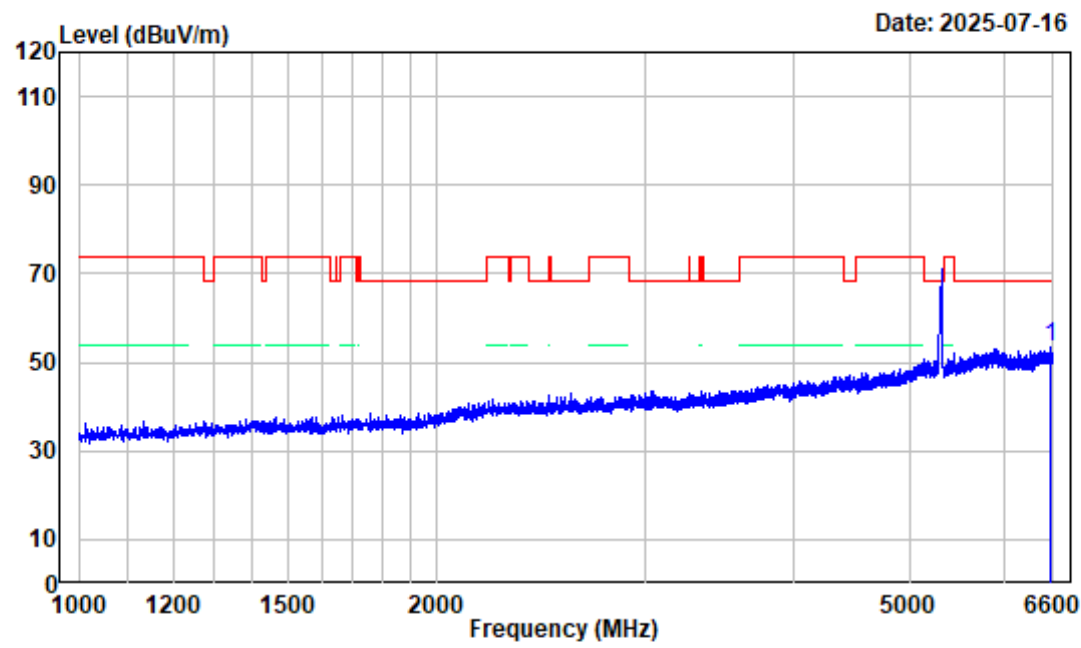

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5310MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6579.000	-3.62	57.19	53.57	68.20	-14.63 peak


802.11ac40 High Channel 1GHz-6.6GHz_VERTICAL

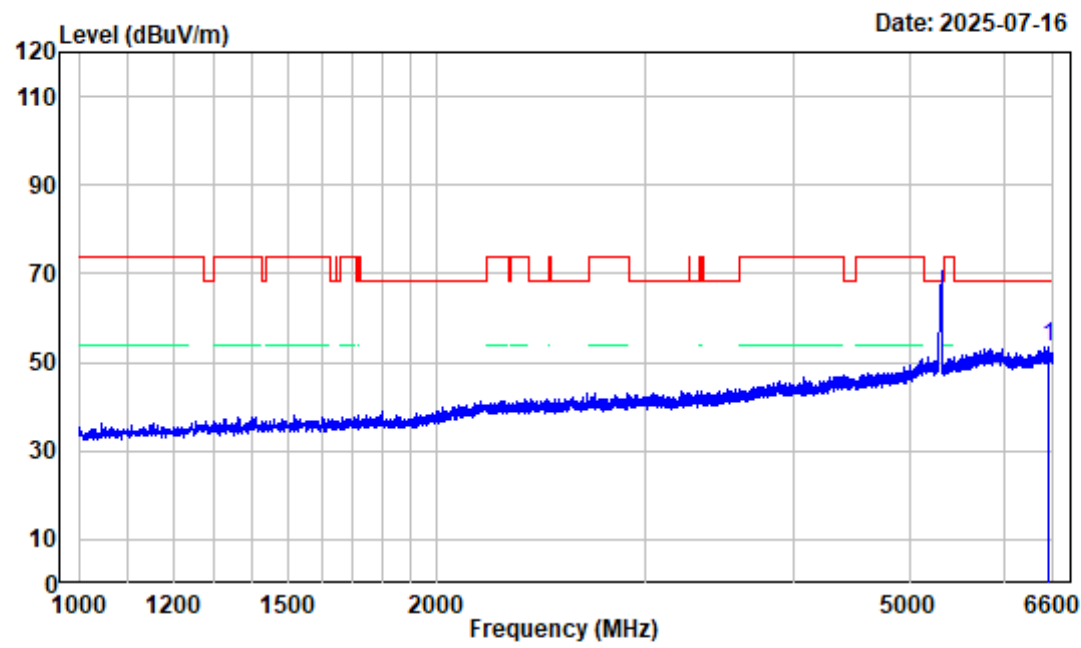

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5310MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6546.800	-3.73	57.26	53.53	68.20	-14.67 peak


802.11ac40 High Channel 6.6GHz-18GHz_HORIZONTAL

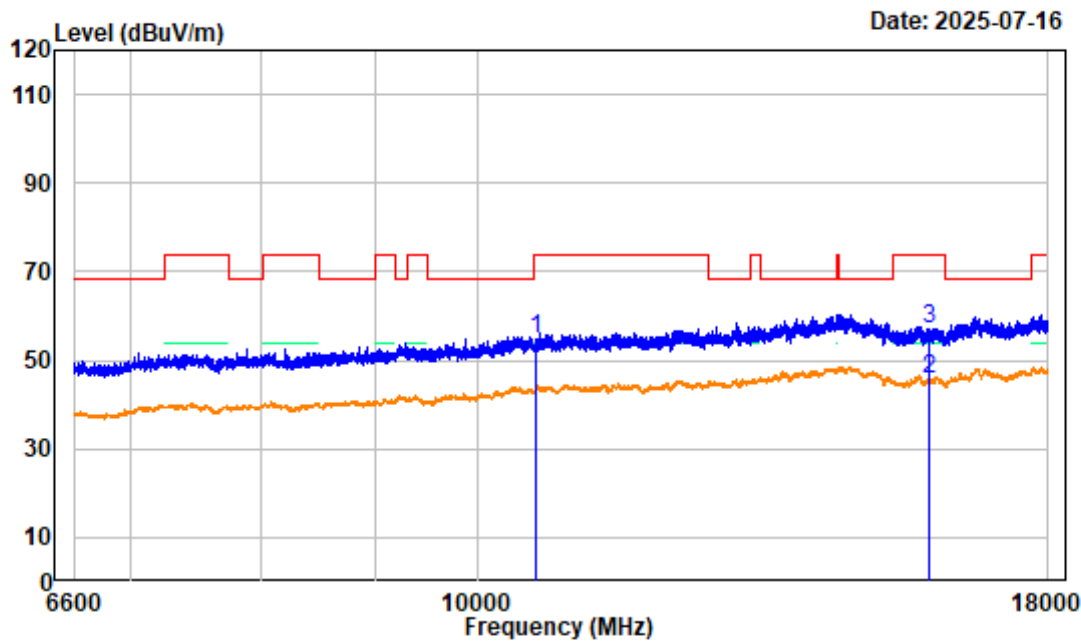

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5310MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	4.14	50.45	54.59	74.00	-19.41	peak
2 15930.000	4.93	40.99	45.92	54.00	-8.08	average
3 15930.000	4.93	52.03	56.96	74.00	-17.04	peak


802.11ac40 High Channel 6.6GHz-18GHz_VERTICAL

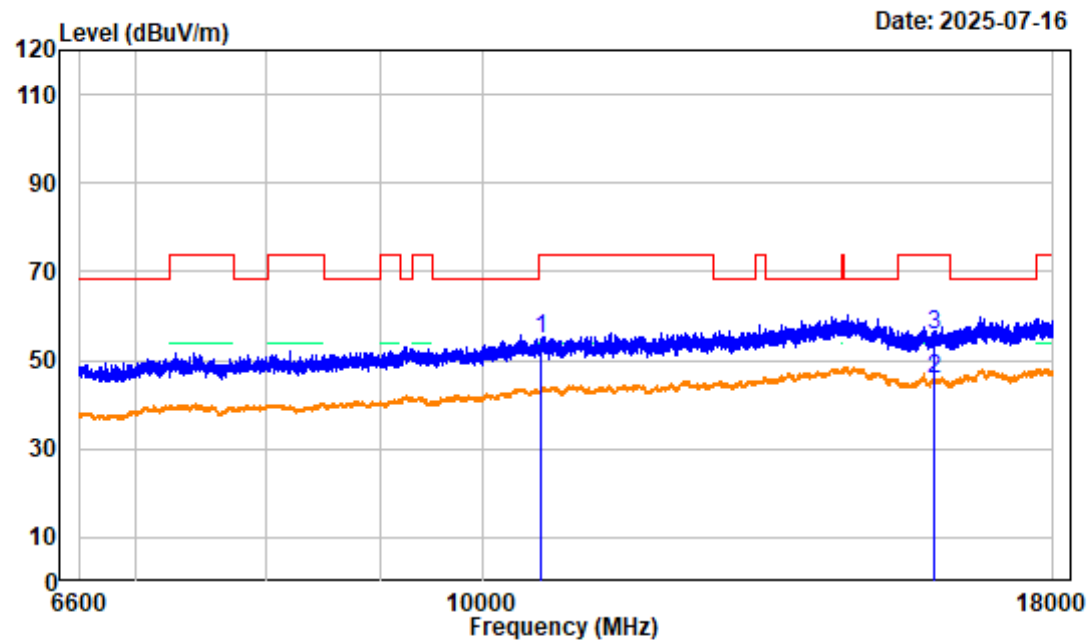

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5310MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10620.000	4.14	50.62	54.76	74.00	-19.24	peak
2 15930.000	4.93	40.88	45.81	54.00	-8.19	average
3 15930.000	4.93	50.95	55.88	74.00	-18.12	peak


802.11ac40 High Channel Bandedge_HORIZONTAL

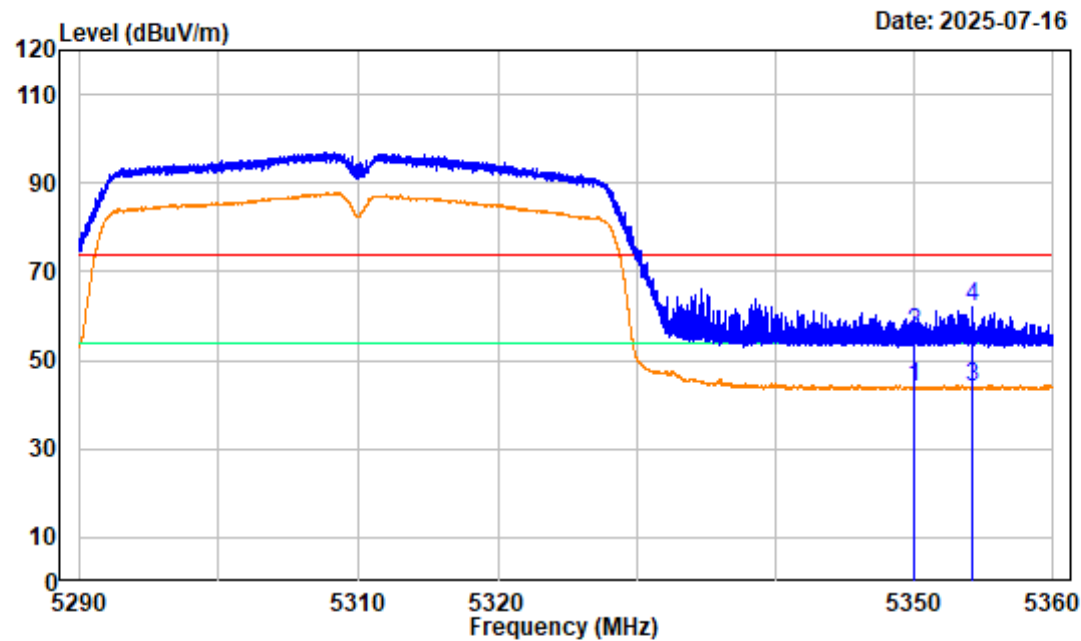

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5310MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.62	43.81	54.00	-10.19	average
2	5350.000	-5.81	61.80	55.99	74.00	-18.01	peak
3	5354.111	-5.79	49.60	43.81	54.00	-10.19	Average
4	5354.111	-5.79	67.63	61.84	74.00	-12.16	Peak


802.11ac40 High Channel Bandedge_VERTICAL

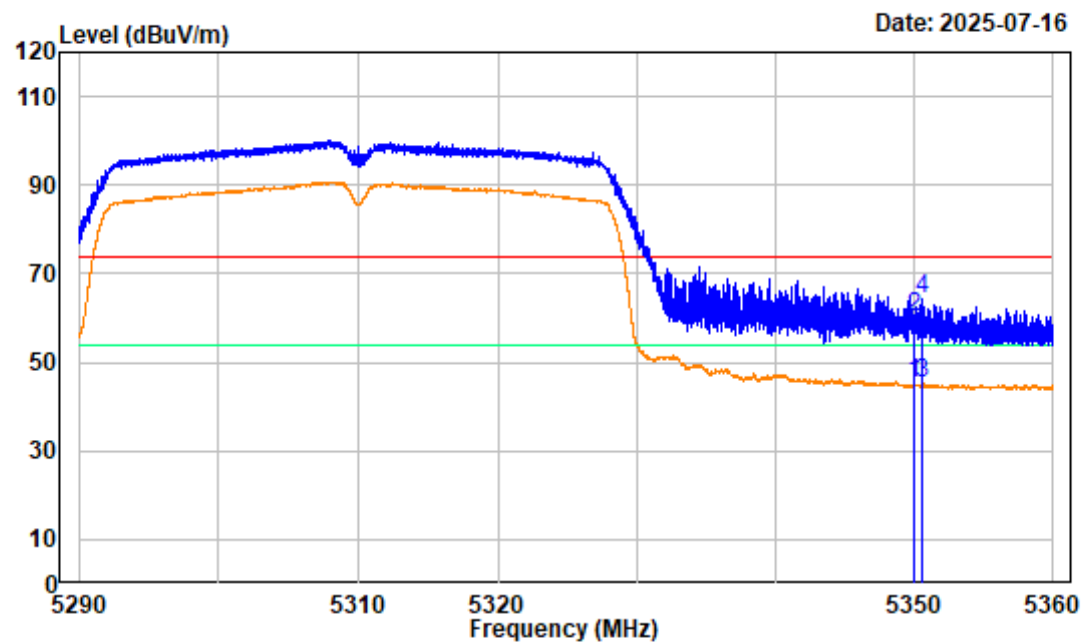

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5310MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.97	45.16	54.00	-8.84	average
2	5350.000	-5.81	65.95	60.14	74.00	-13.86	peak
3	5350.594	-5.81	50.97	45.16	54.00	-8.84	Average
4	5350.594	-5.81	69.92	64.11	74.00	-9.89	Peak


802.11ac80 Channel 1GHz-6.6GHz_HORIZONTAL

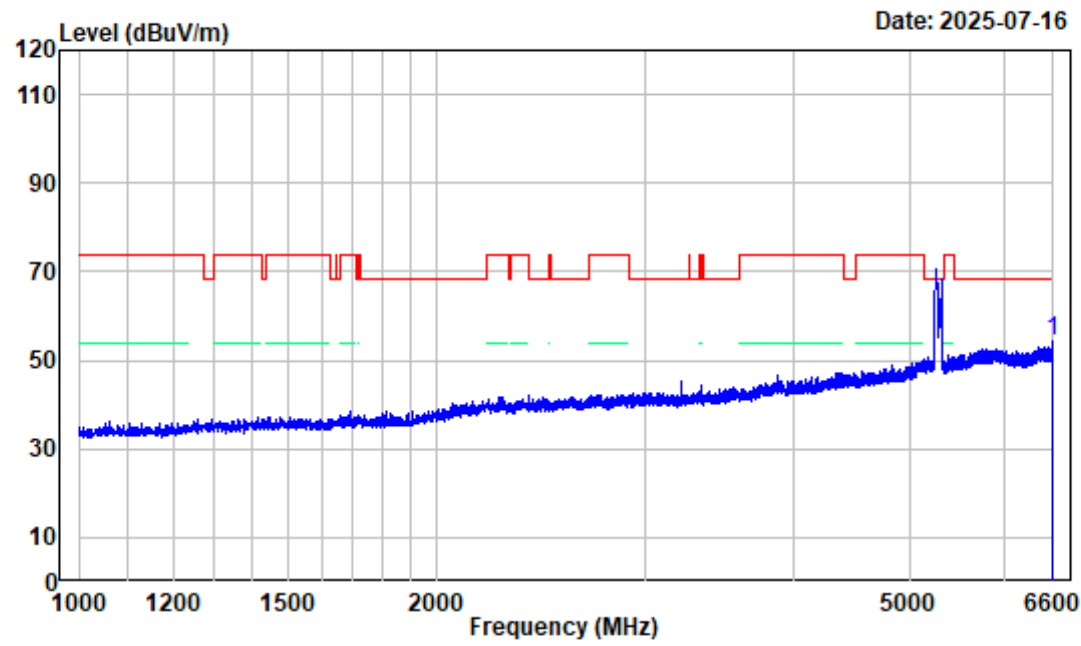

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5290MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6586.700	-3.59	57.87	54.28	68.20	-13.92 peak


802.11ac80 Channel 1GHz-6.6GHz_VERTICAL

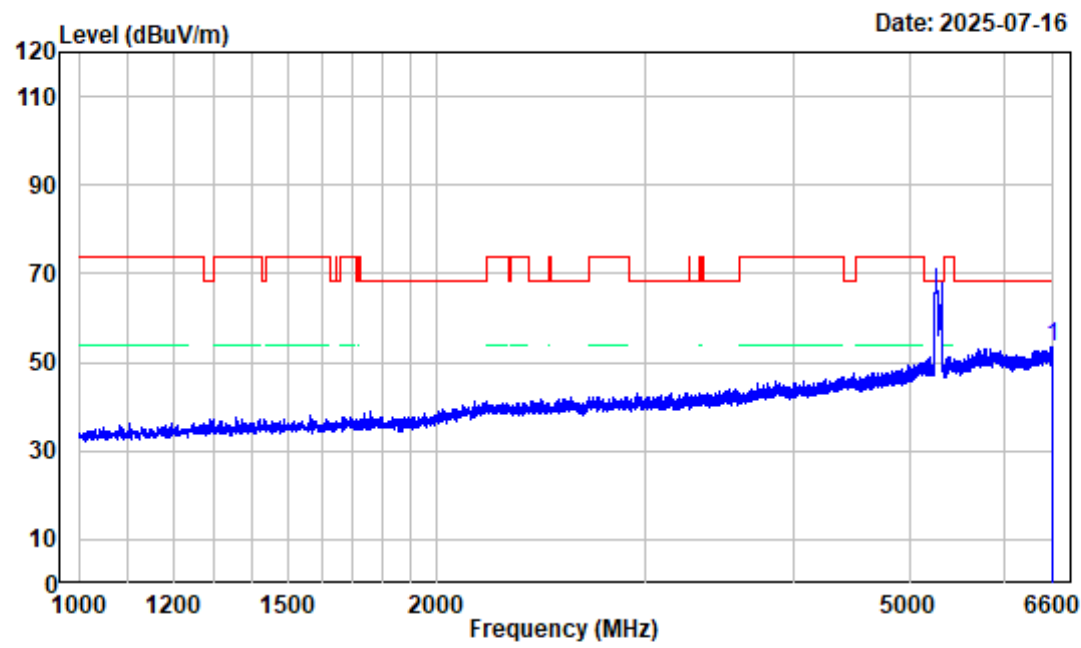

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5290MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6588.100	-3.58	56.85	53.27	68.20	-14.93 peak


802.11ac80 Channel 6.6GHz-18GHz_HORIZONTAL

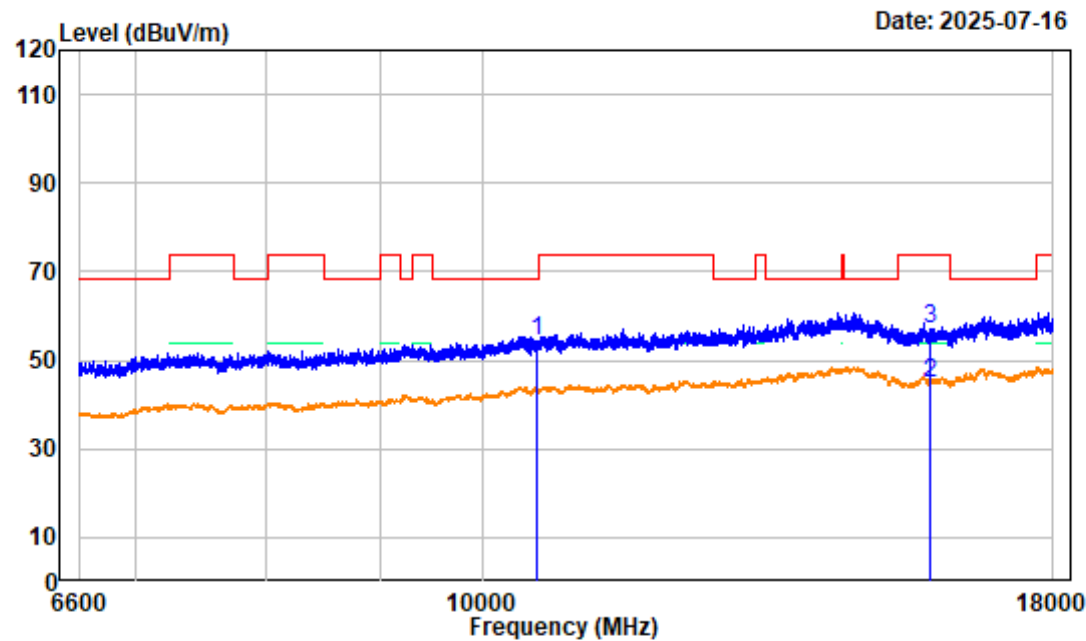

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5290MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10580.000	4.00	50.46	54.46	68.20	-13.74	peak
2 15870.000	5.07	39.78	44.85	54.00	-9.15	average
3 15870.000	5.07	51.80	56.87	74.00	-17.13	peak


802.11ac80 Channel 6.6GHz-18GHz_VERTICAL

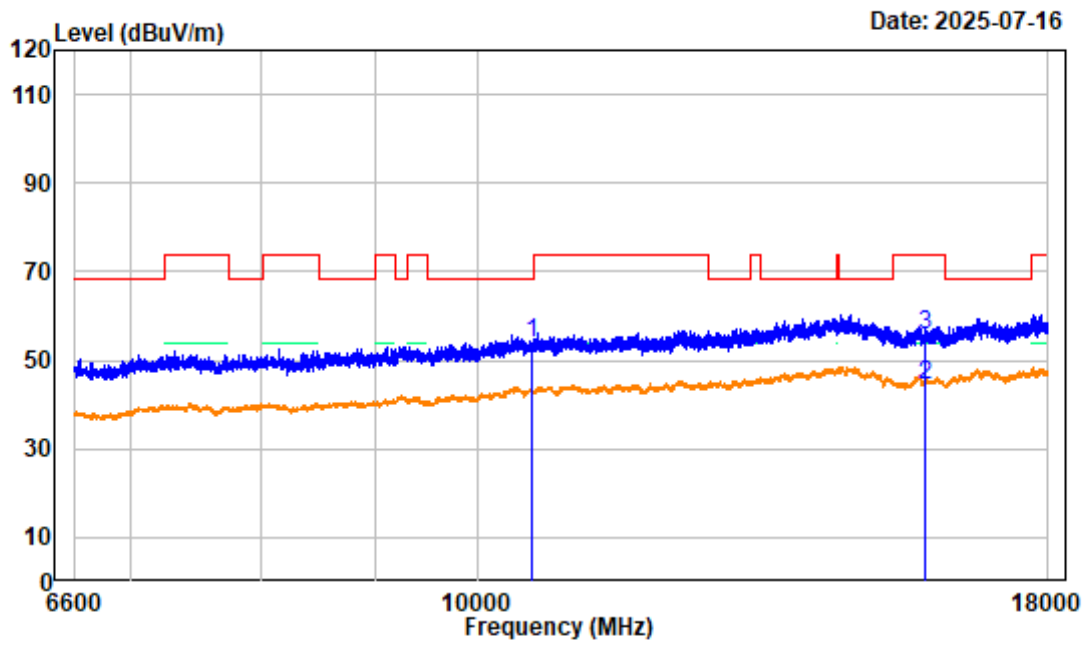

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5290MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10580.000	4.00	49.79	53.79	68.20	-14.41	peak
2 15870.000	5.07	39.47	44.54	54.00	-9.46	average
3 15870.000	5.07	50.44	55.51	74.00	-18.49	peak


802.11ac80 Channel Bandedge_HORIZONTAL

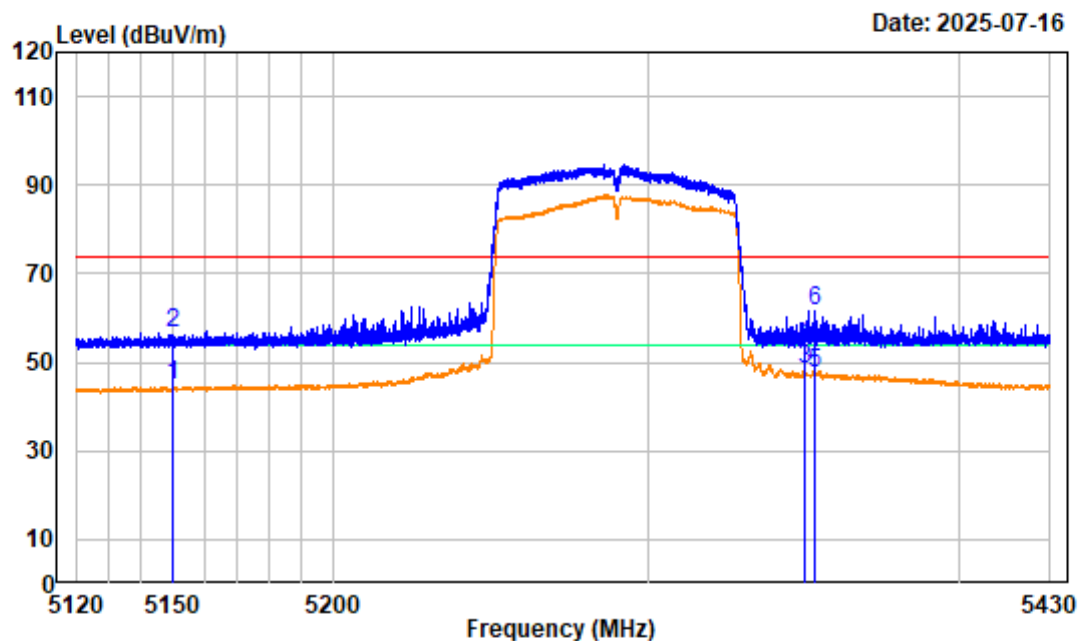

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Channel 5290MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.61	44.62	54.00	-9.38	average
2	5150.000	-5.99	62.65	56.66	74.00	-17.34	peak
3	5350.000	-5.81	54.28	48.47	54.00	-5.53	average
4	5350.000	-5.81	59.89	54.08	74.00	-19.92	peak
5	5353.663	-5.79	53.26	47.47	54.00	-6.53	Average
6	5353.663	-5.79	67.28	61.49	74.00	-12.51	Peak


802.11ac80 Channel Bandedge_VERTICAL

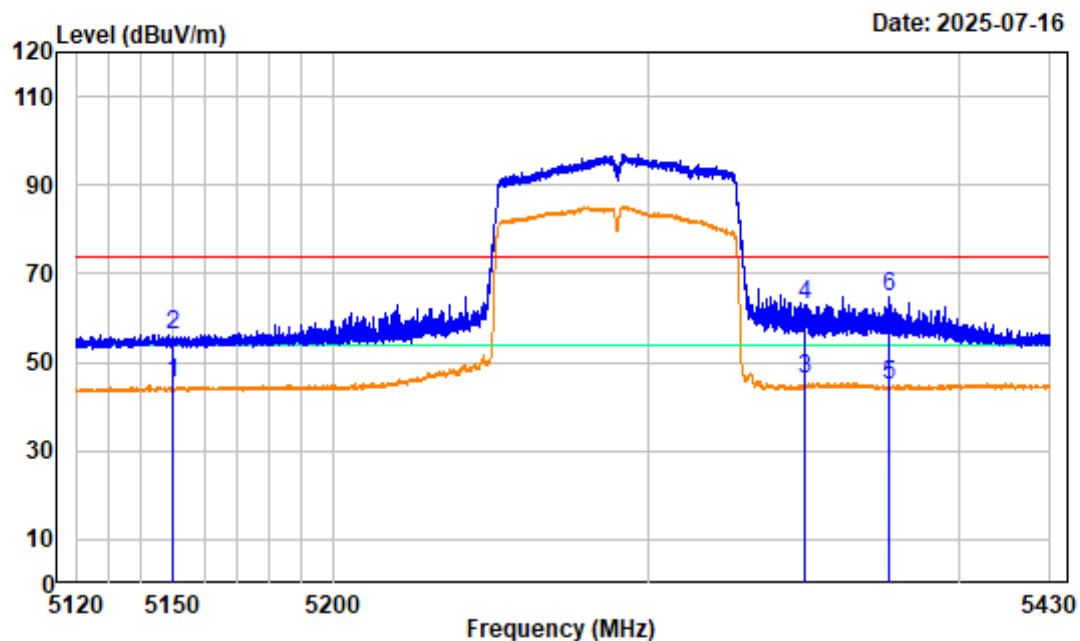

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Channel 5290MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.30	45.31	54.00	-8.69	average
2	5150.000	-5.99	62.35	56.36	74.00	-17.64	peak
3	5350.000	-5.81	51.96	46.15	54.00	-7.85	average
4	5350.000	-5.81	68.68	62.87	74.00	-11.13	peak
5	5377.416	-5.66	50.59	44.93	54.00	-9.07	Average
6	5377.416	-5.66	70.60	64.94	74.00	-9.06	Peak


802.11a Low Channel 1GHz-6.6GHz_HORIZONTAL

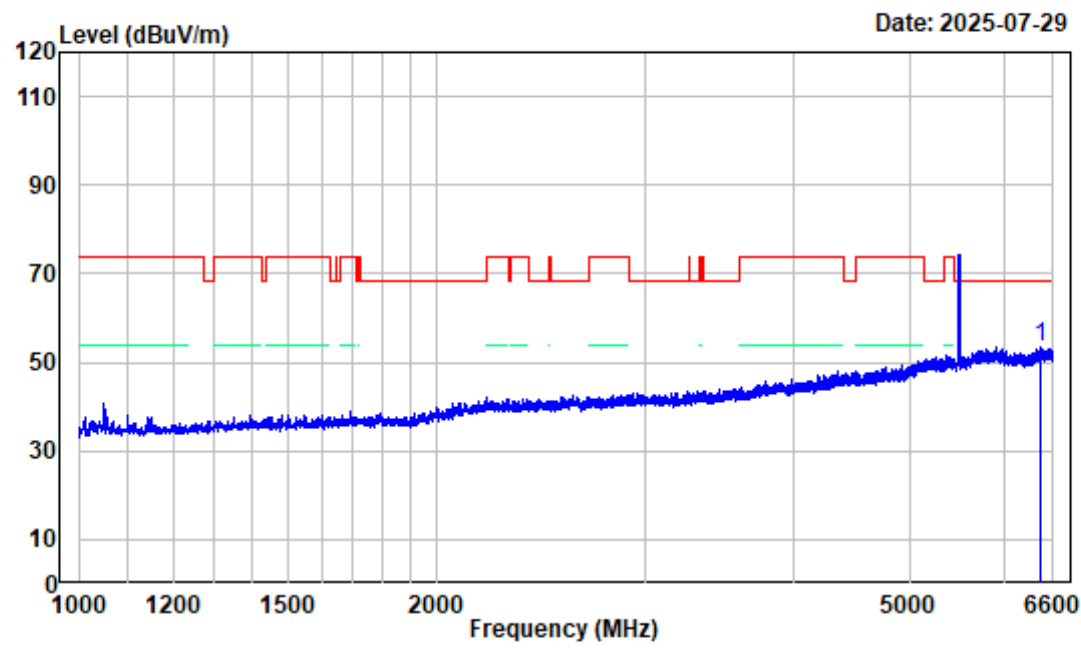

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6440.400	-3.62	57.09	53.47	68.20	-14.73	Peak


802.11a Low Channel 1GHz-6.6GHz_VERTICAL

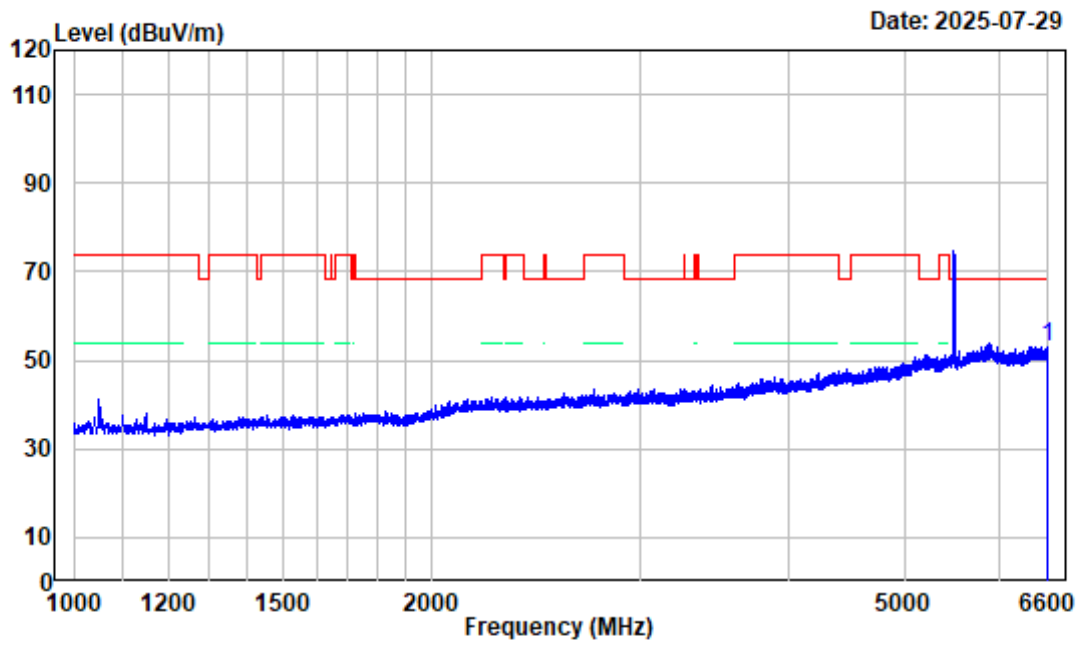

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6595.100	-3.56	56.43	52.87	68.20	-15.33 Peak


802.11a Low Channel 6.6GHz-18GHz_HORIZONTAL

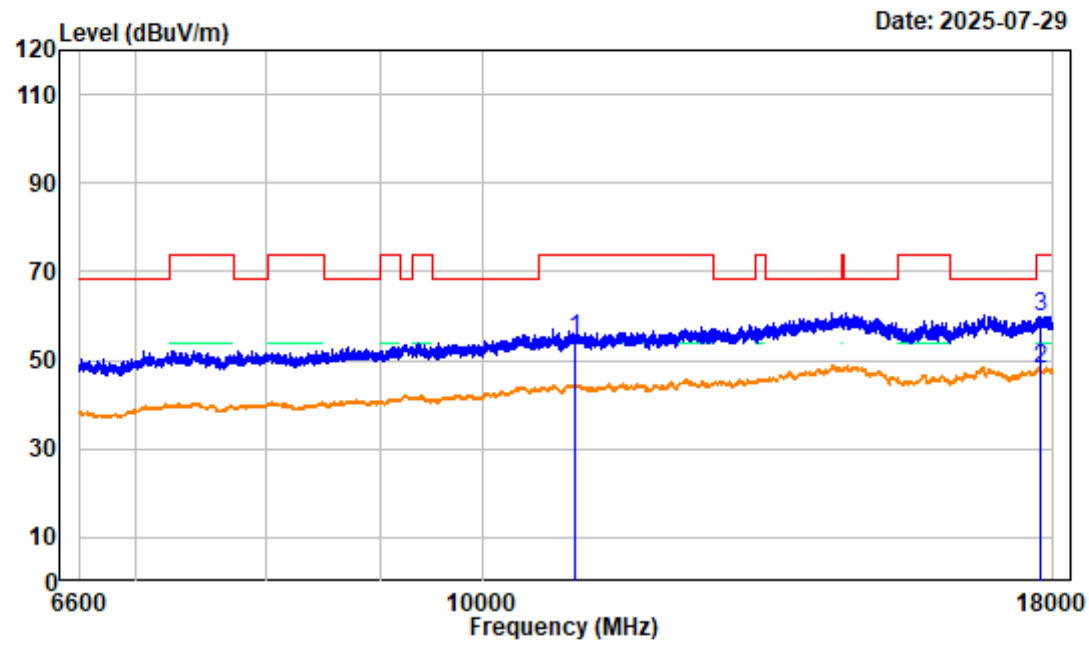

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.400	5.27	49.30	54.57	74.00	-19.43	Peak
2 17769.150	7.66	40.22	47.88	54.00	-6.12	Average
3 17769.150	7.66	52.30	59.96	74.00	-14.04	Peak


802.11a Low Channel 6.6GHz-18GHz_VERTICAL

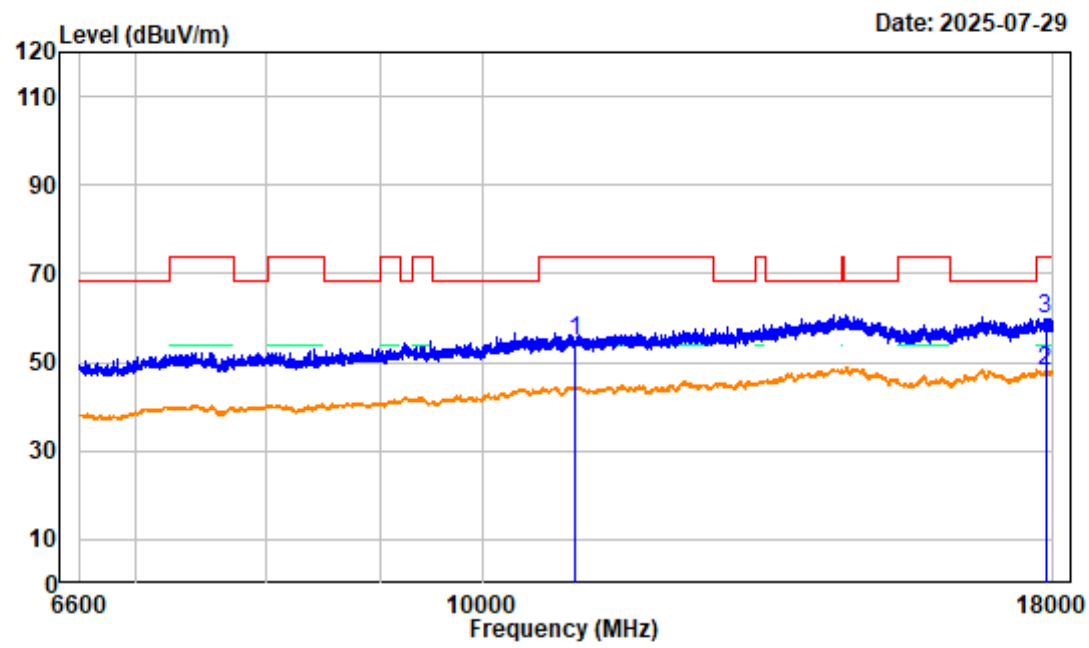

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.400	5.27	49.53	54.80	74.00	-19.20	Peak
2 17860.350	8.24	39.59	47.83	54.00	-6.17	Average
3 17860.350	8.24	51.68	59.92	74.00	-14.08	Peak


802.11a Low Channel Bandedge_HORIZONTAL

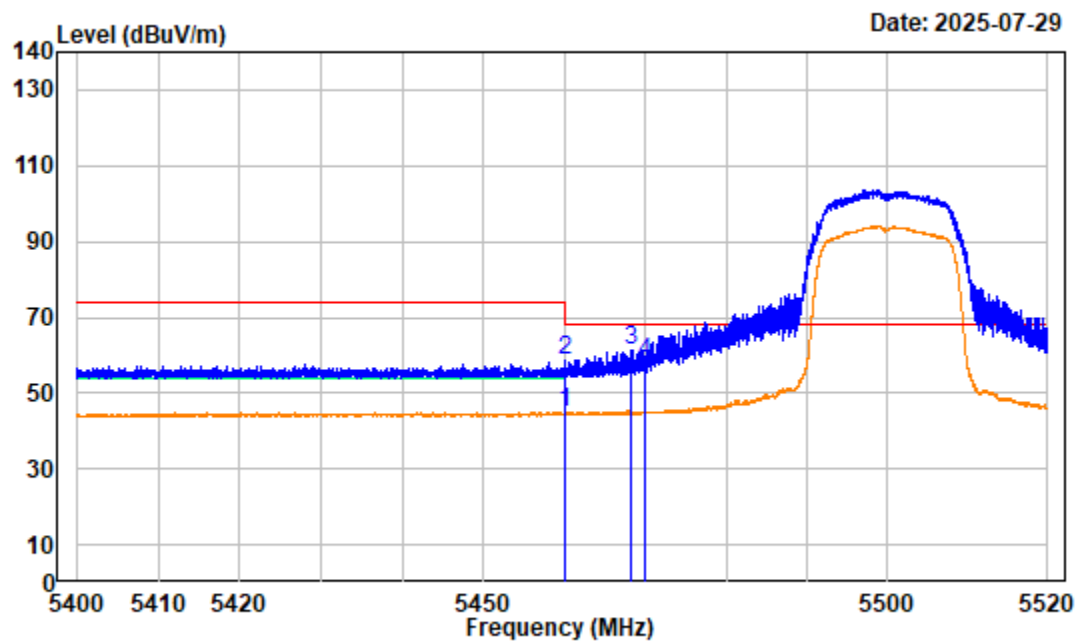

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5500MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	50.50	44.91	54.00	-9.09	Average
2	5460.000	-5.59	64.14	58.55	68.20	-9.65	Peak
3	5468.205	-5.61	66.70	61.09	68.20	-7.11	Peak
4	5470.000	-5.61	63.89	58.28	68.20	-9.92	Peak


802.11a Low Channel Bandedge_VERTICAL

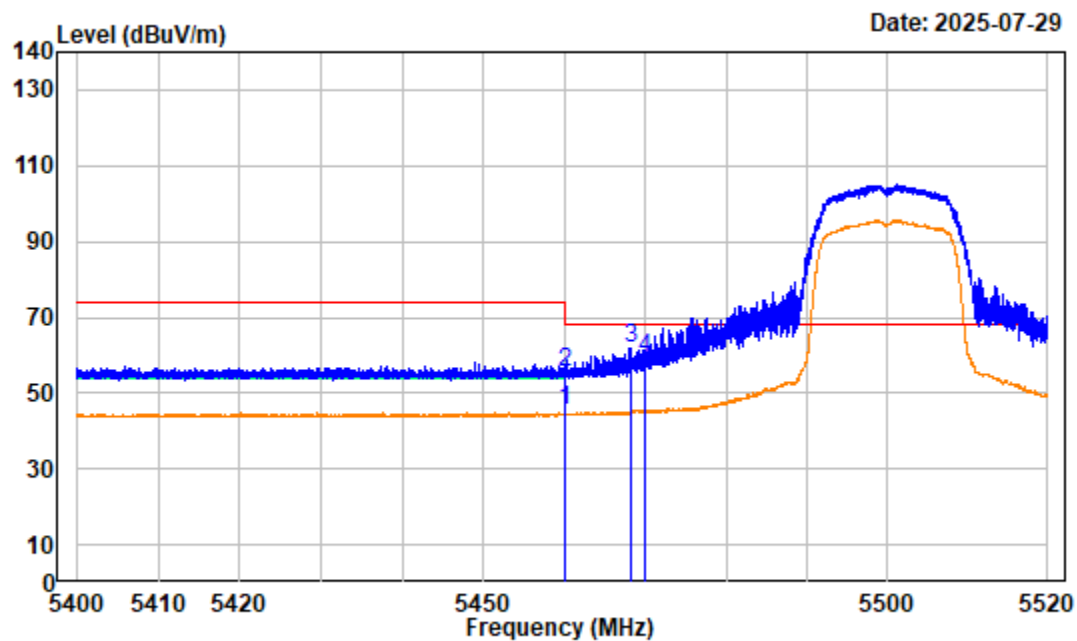

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5500MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	51.12	45.53	54.00	-8.47	Average
2	5460.000	-5.59	60.82	55.23	68.20	-12.97	Peak
3	5468.145	-5.61	67.35	61.74	68.20	-6.46	Peak
4	5470.000	-5.61	64.75	59.14	68.20	-9.06	Peak


802.11a Middle Channel 1GHz-6.6GHz_HORIZONTAL

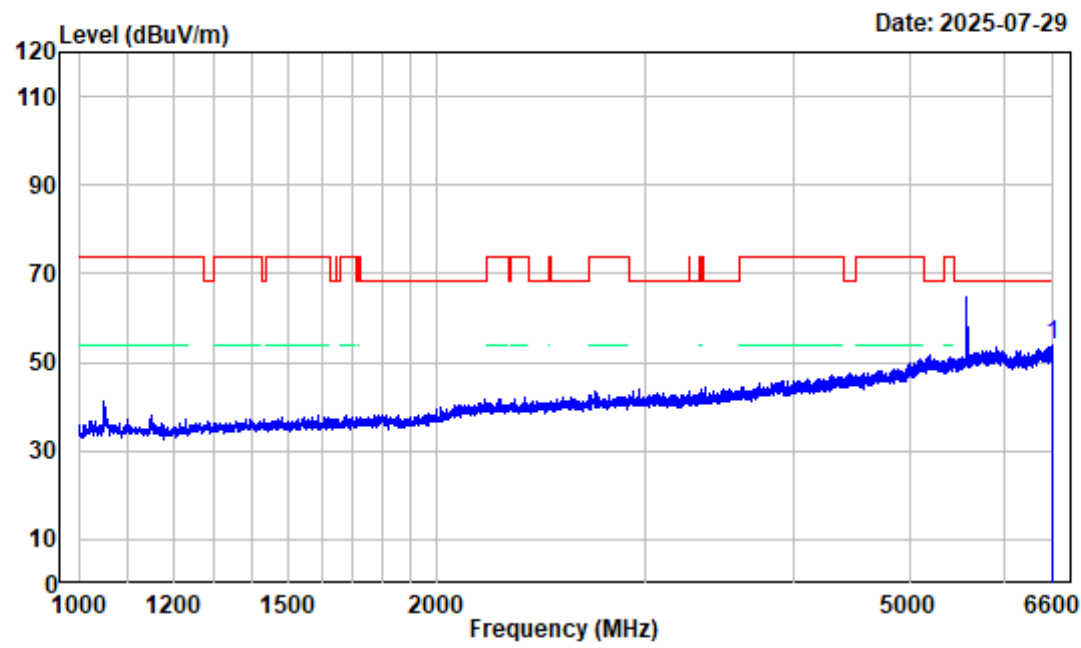

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6592.300	-3.57	57.64	54.07	68.20	-14.13 Peak


802.11a Middle Channel 1GHz-6.6GHz_VERTICAL

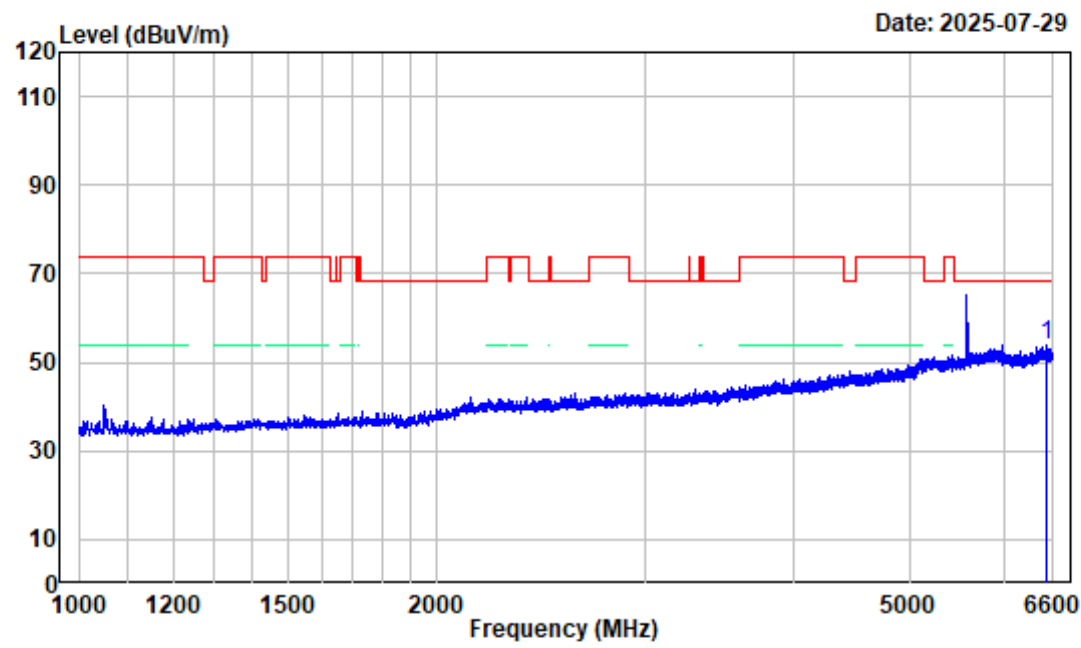

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6516.700	-3.79	57.55	53.76	68.20	-14.44 Peak


802.11a Middle Channel 6.6GHz-18GHz_HORIZONTAL

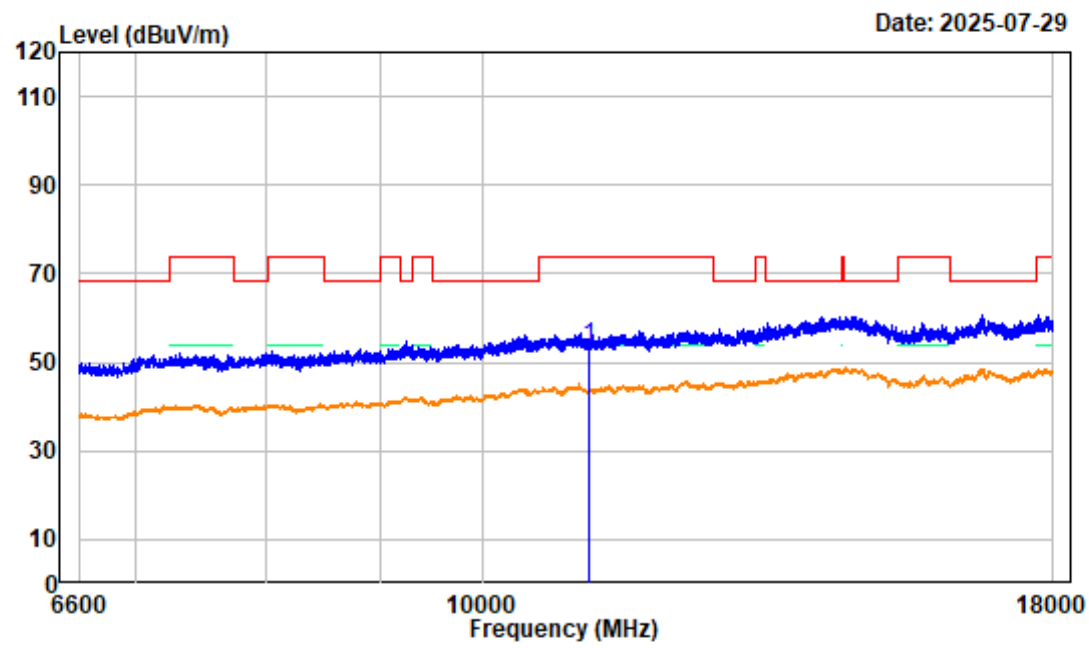

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	49.03	53.35	74.00	-20.65	Peak


802.11a Middle Channel 6.6GHz-18GHz_VERTICAL

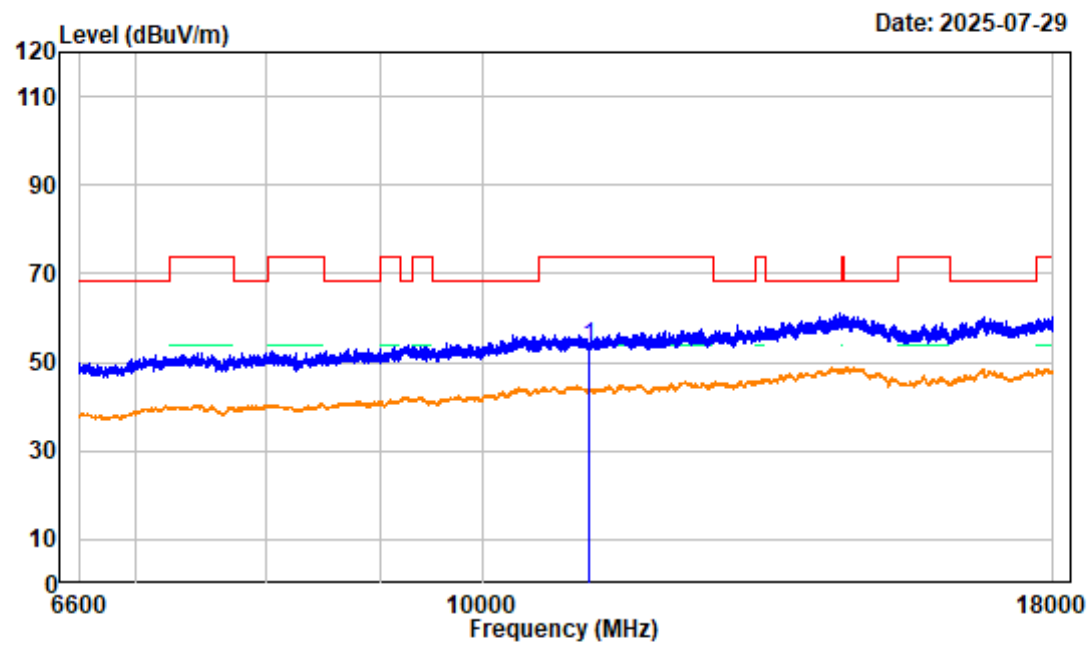

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	49.09	53.41	74.00	-20.59	Peak


802.11a High Channel 1GHz-6.6GHz_HORIZONTAL

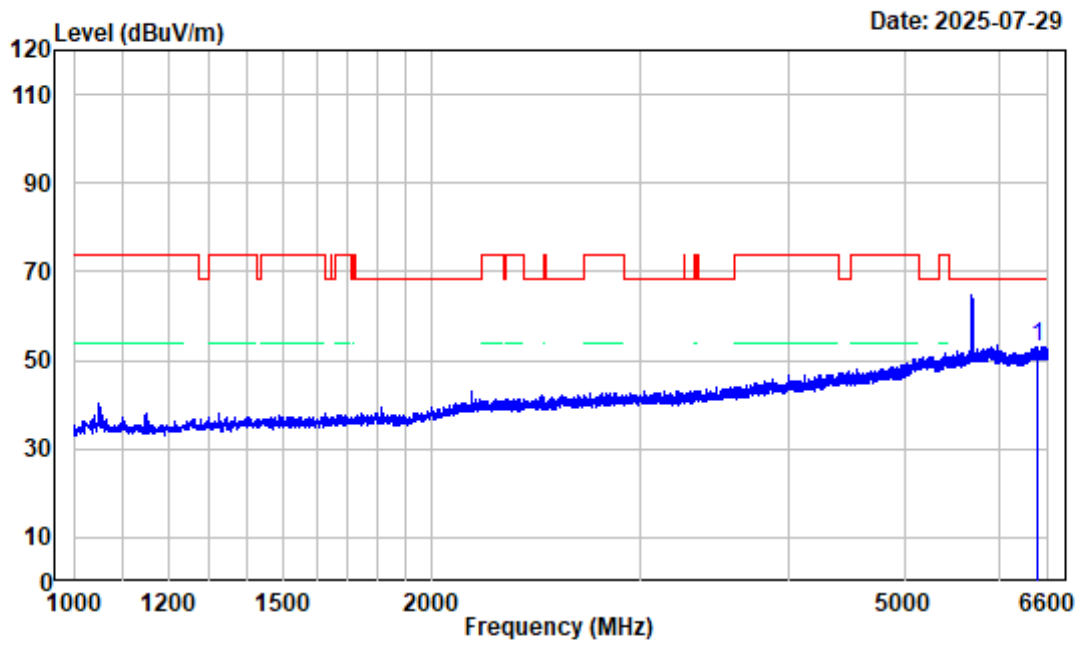

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6475.400	-3.71	56.88	53.17	68.20	-15.03	Peak


802.11a High Channel 1GHz-6.6GHz_VERTICAL

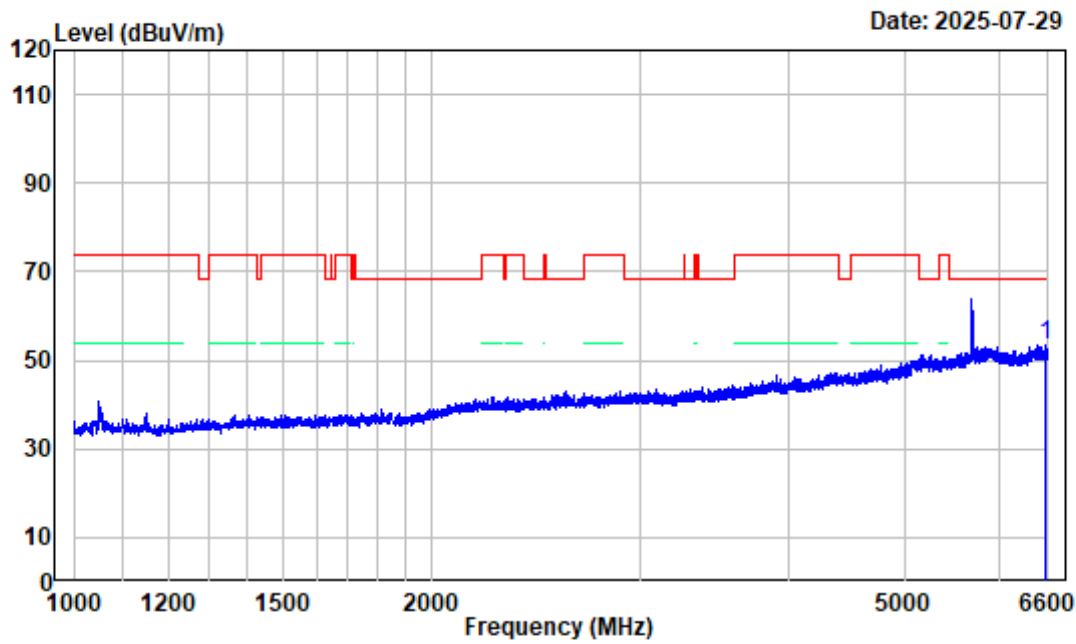

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6562.200	-3.68	57.11	53.43	68.20	-14.77 Peak


802.11a High Channel 6.6GHz-18GHZ_HORIZONTAL

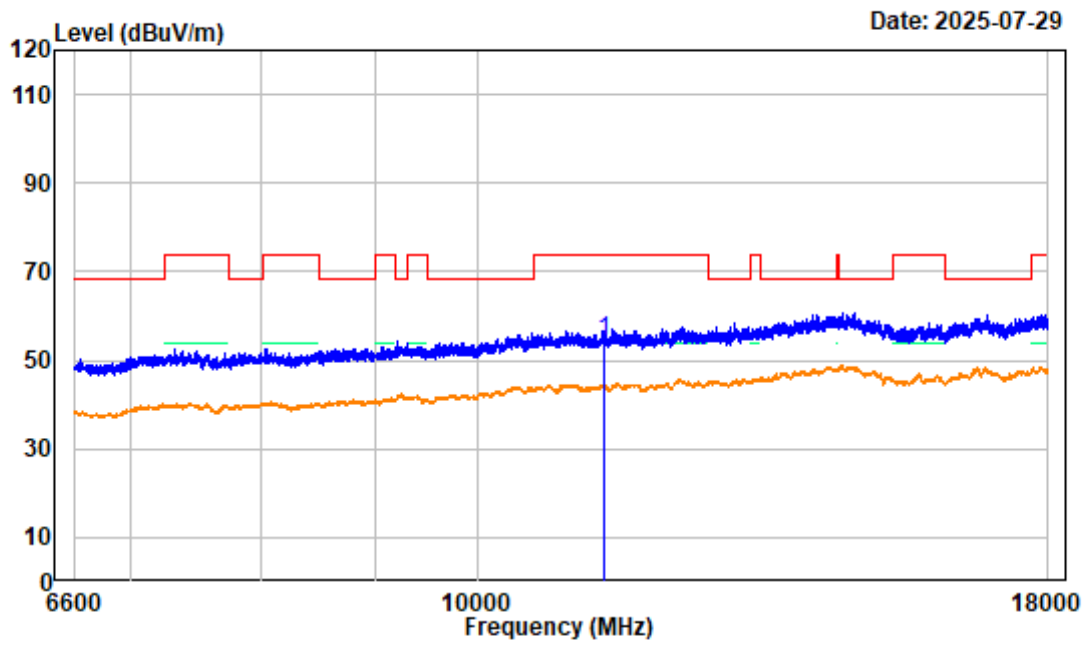

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11399.400	5.66	48.66	54.32	74.00	-19.68	Peak


802.11a High Channel 6.6GHz-18GHZ_VERTICAL

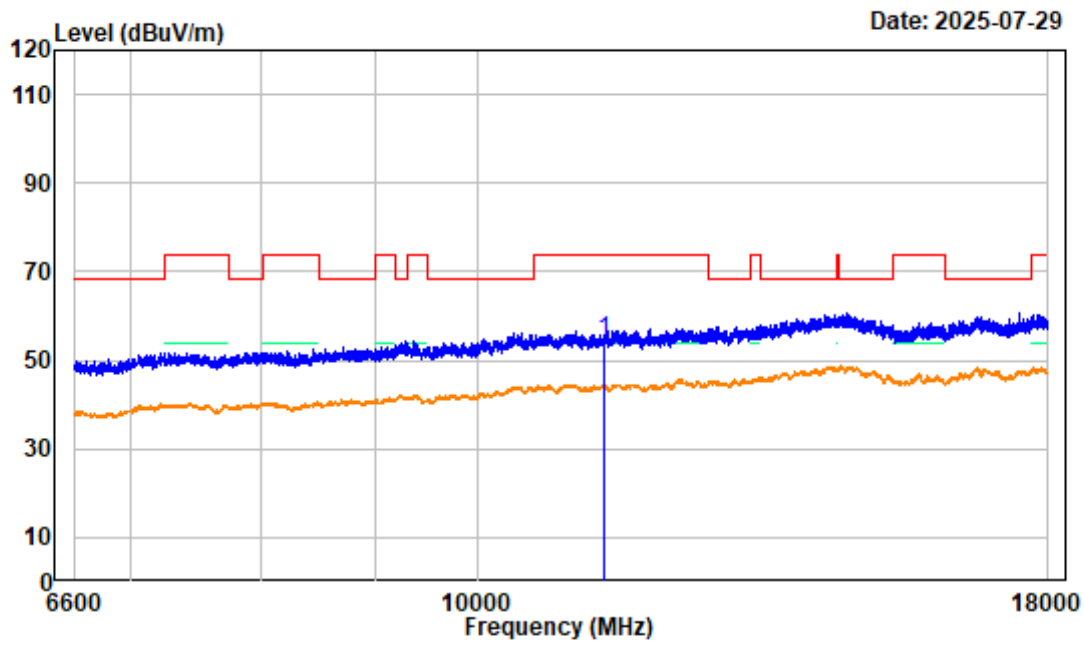

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11399.400	5.66	48.72	54.38	74.00	-19.62	Peak


802.11a High Channel Bandedge_HORIZONTAL

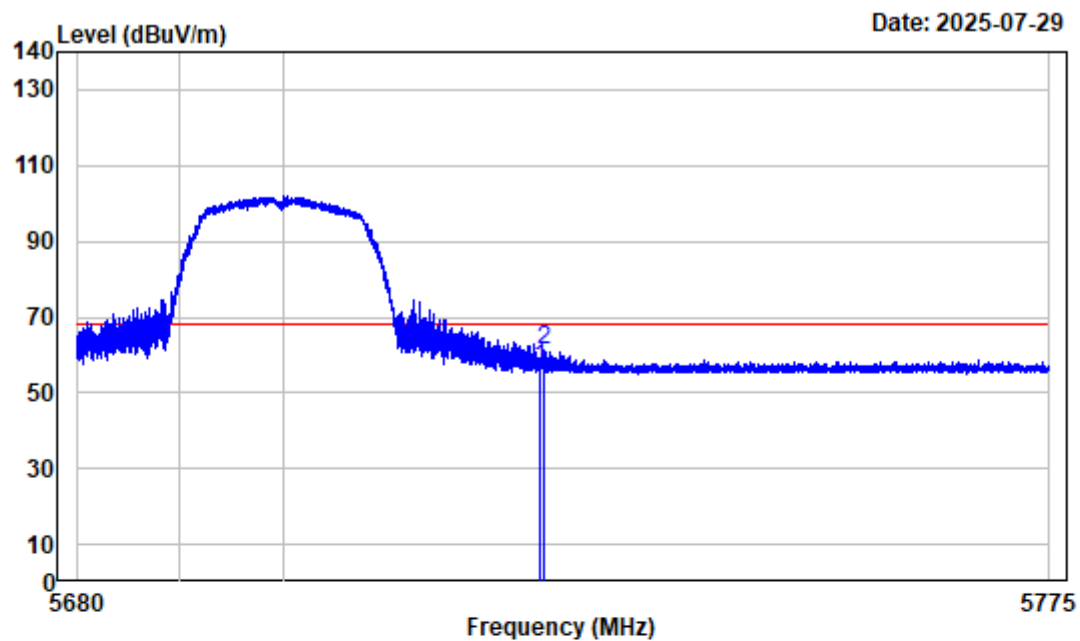

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5700MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	60.96	56.50	68.20	-11.70	Peak
2	5725.517	-4.45	65.86	61.41	68.20	-6.79	Peak


802.11a High Channel Bandedge_VERTICAL

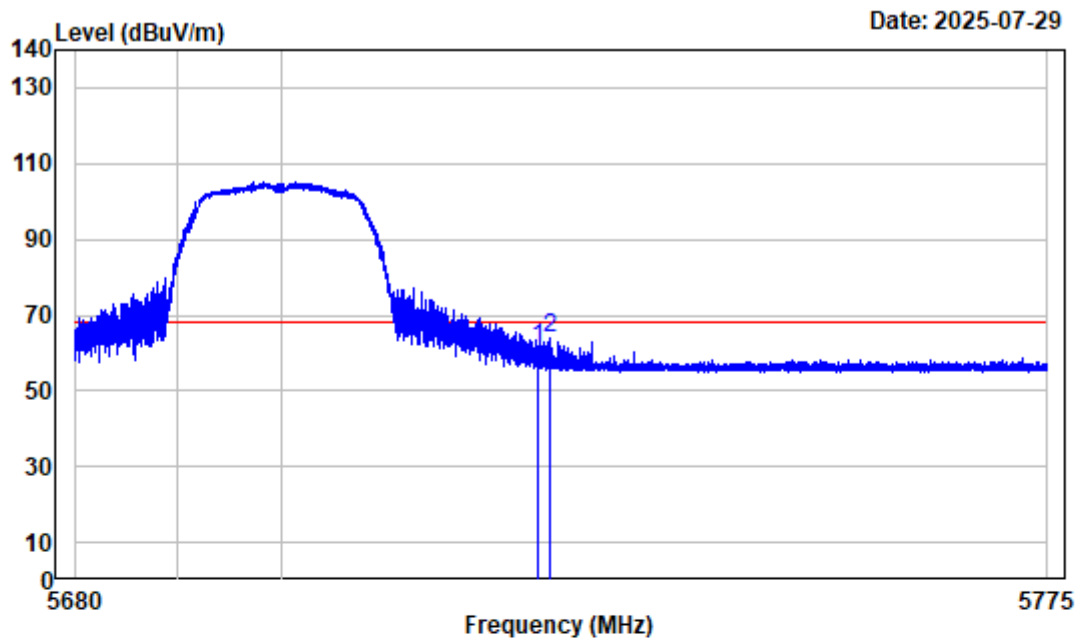

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	65.60	61.14	68.20	-7.06 Peak
2	5726.241	-4.45	68.23	63.78	68.20	-4.42 Peak


802.11ac20 Low Channel 1GHz-6.6GHz_HORIZONTAL

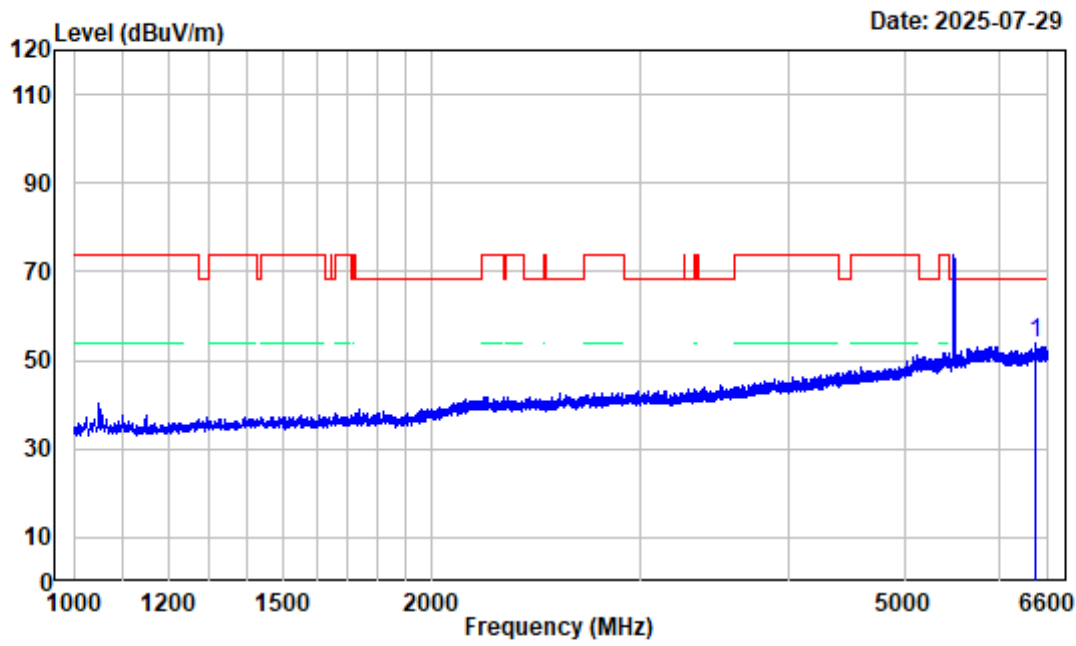

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6448.100	-3.61	57.50	53.89	68.20	-14.31	Peak


802.11ac20 Low Channel 1GHz-6.6GHz_VERTICAL

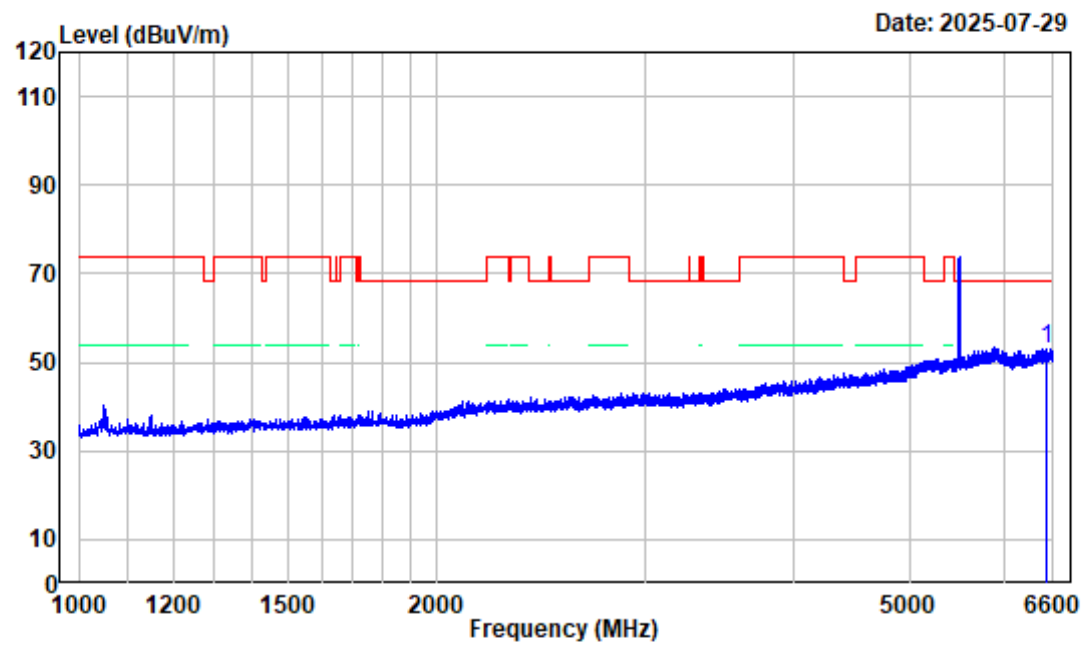

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6525.800	-3.77	56.76	52.99	68.20	-15.21	Peak


802.11ac20 Low Channel 6.6GHz-18GHz_HORIZONTAL

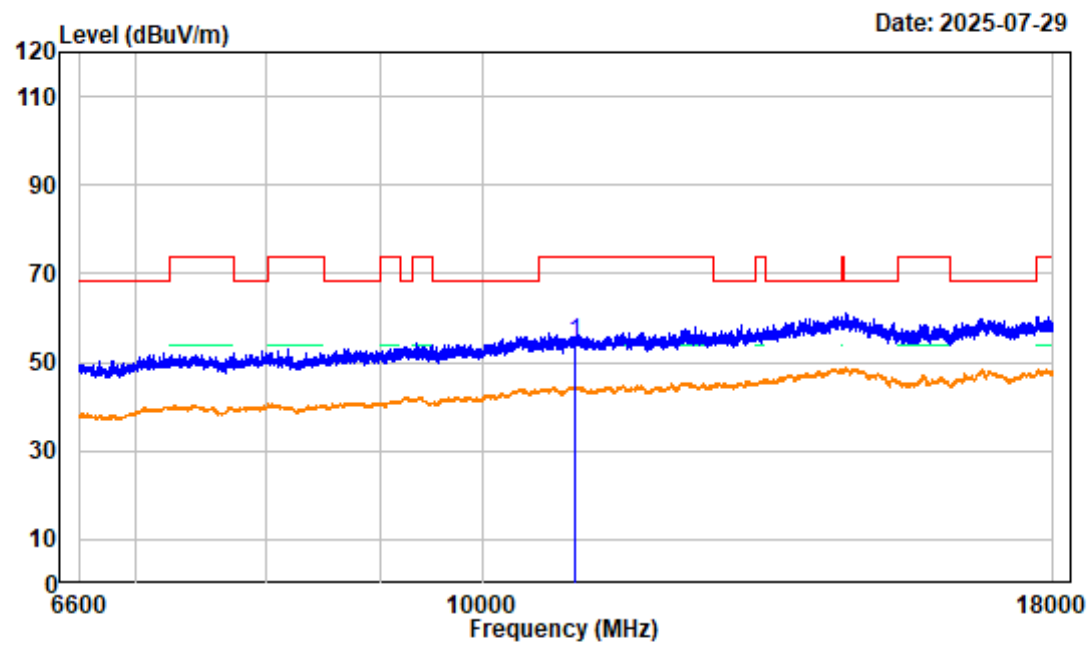

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.400	5.27	48.99	54.26	74.00	-19.74	Peak


802.11ac20 Low Channel 6.6GHz-18GHz_VERTICAL

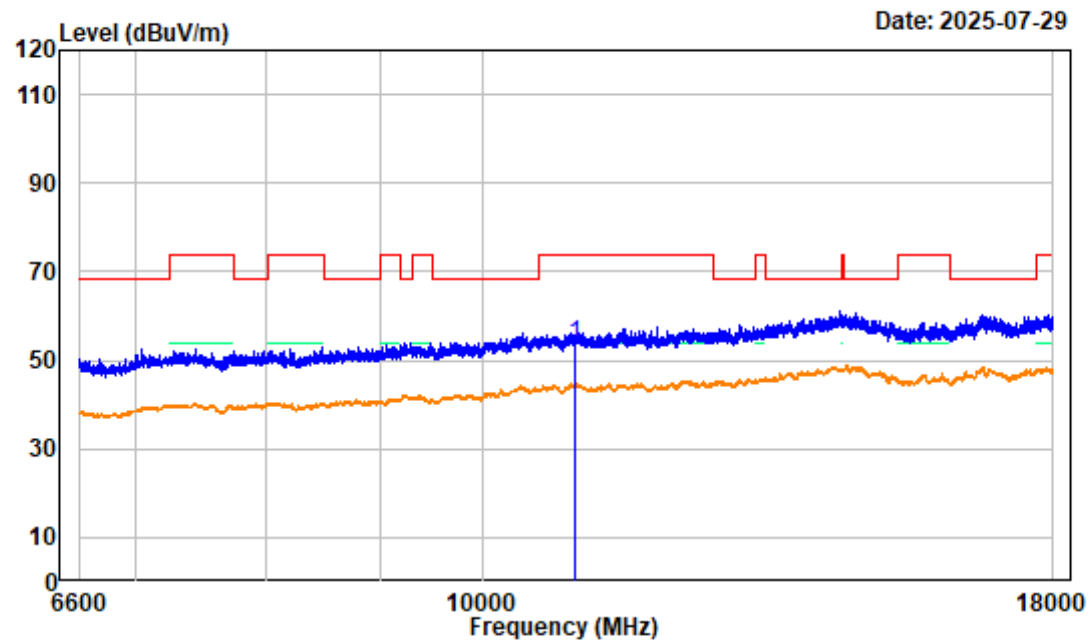

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.400	5.27	48.10	53.37	74.00	-20.63	Peak

802.11ac20 Low Channel Bandedge_HORIZONTAL

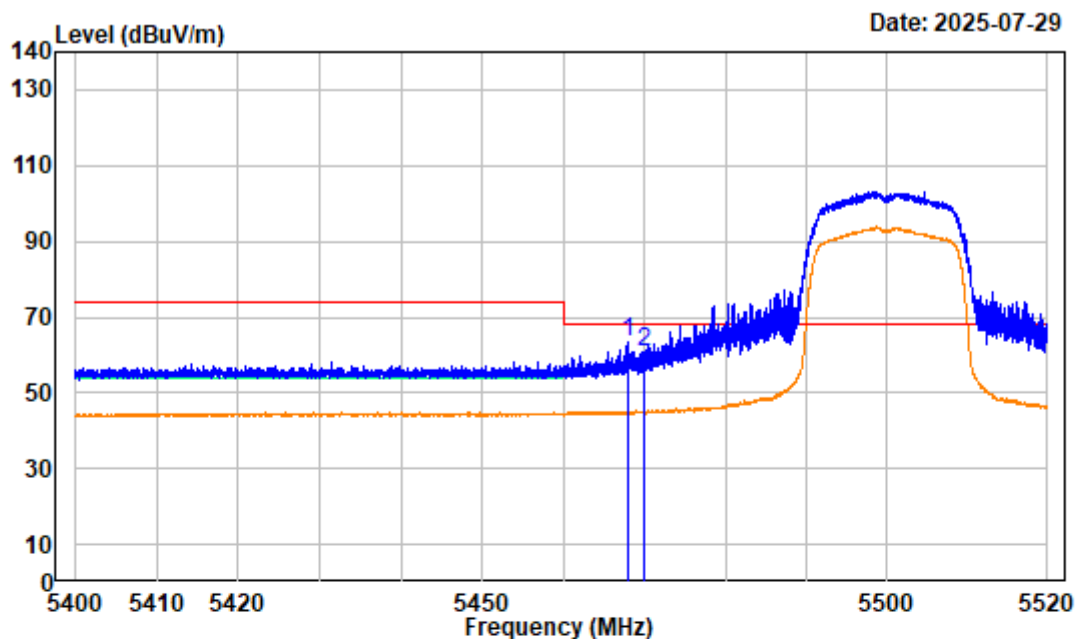

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac20 Low Channel 5500MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5468.055	-5.61	69.00	63.39	68.20	-4.81	Peak
2	5470.000	-5.61	66.23	60.62	68.20	-7.58	Peak


802.11ac20 Low Channel Bandedge_VERTICAL

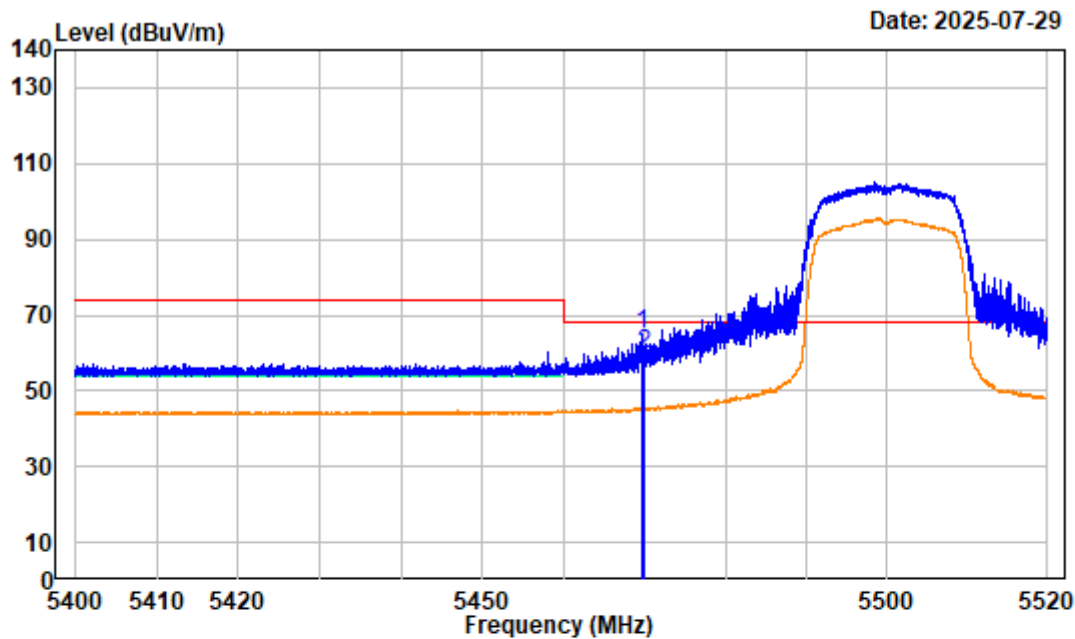

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5469.750	-5.61	70.61	65.00	68.20	-3.20 Peak
2	5470.000	-5.61	65.27	59.66	68.20	-8.54 Peak


802.11ac20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

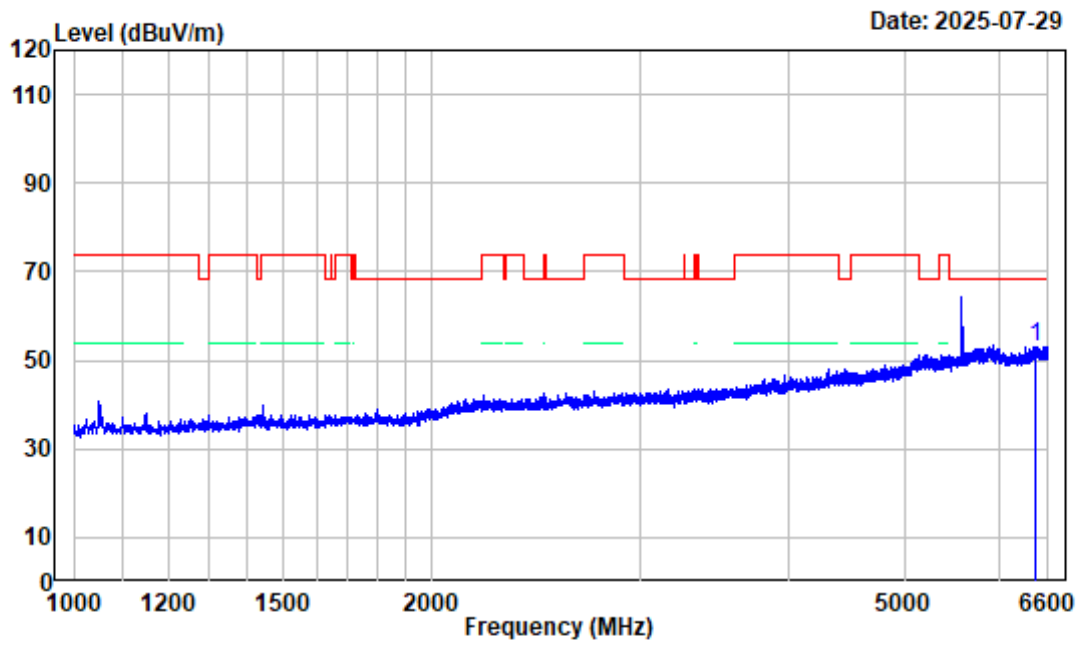

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6443.900	-3.62	56.64	53.02	68.20	-15.18 Peak


802.11ac20 Middle Channel 1GHz-6.6GHz_VERTICAL

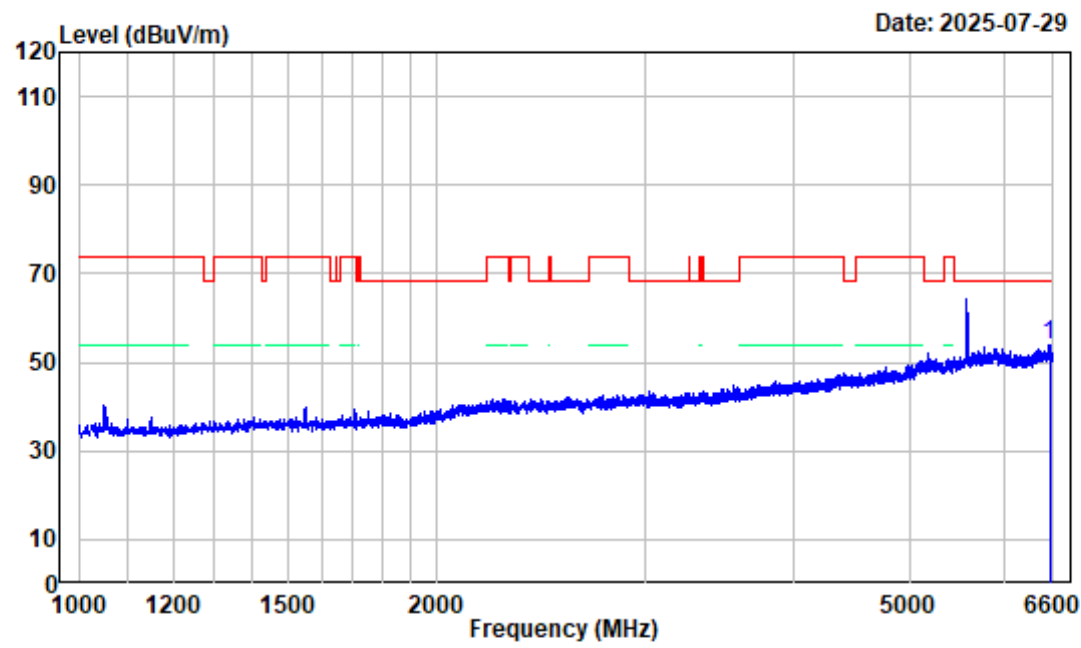

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6554.500	-3.70	57.54	53.84	68.20	-14.36 Peak

802.11ac20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

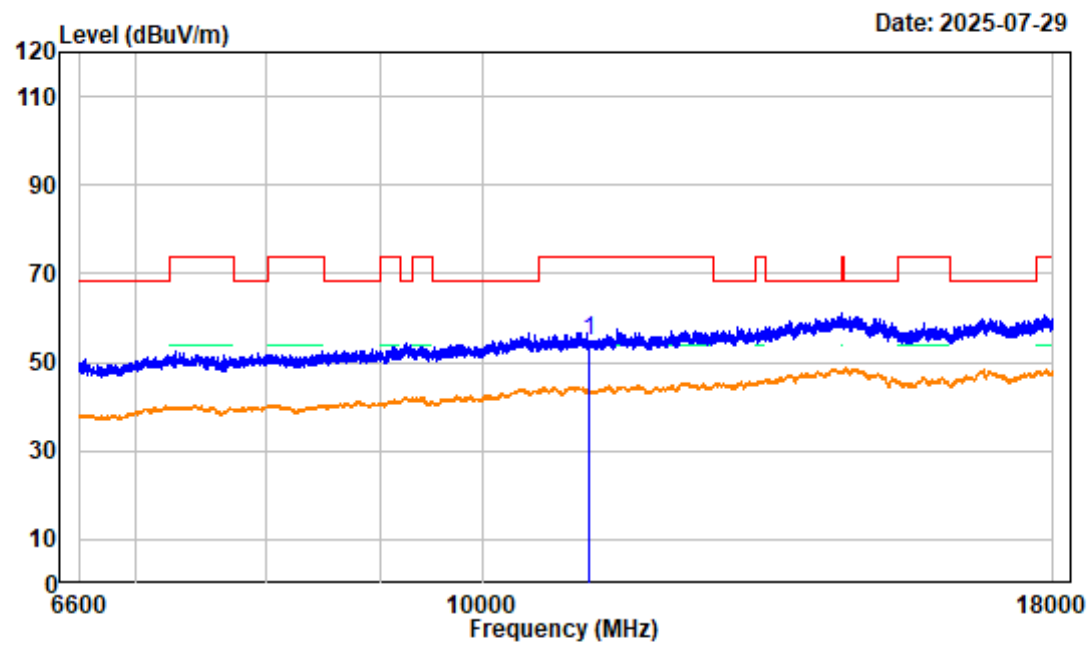

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11ac20 Middle Channel 5580MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	50.49	54.81	74.00	-19.19	Peak


802.11ac20 Middle Channel 6.6GHz-18GHz_VERTICAL

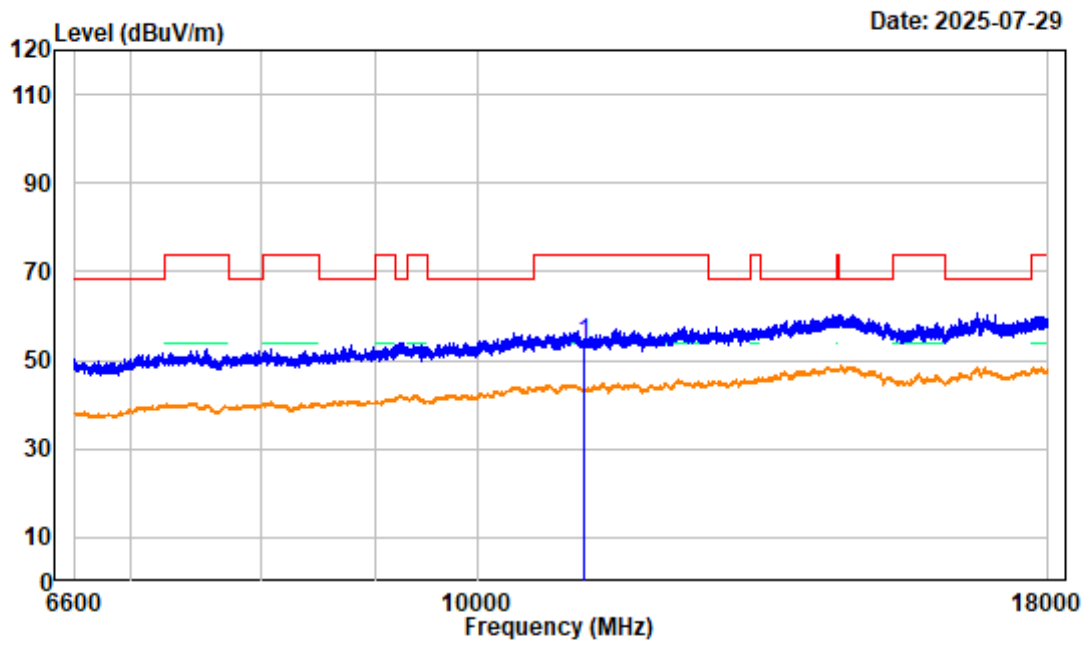

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	49.46	53.78	74.00	-20.22	Peak


802.11ac20 High Channel 1GHz-6.6GHz_HORIZONTAL

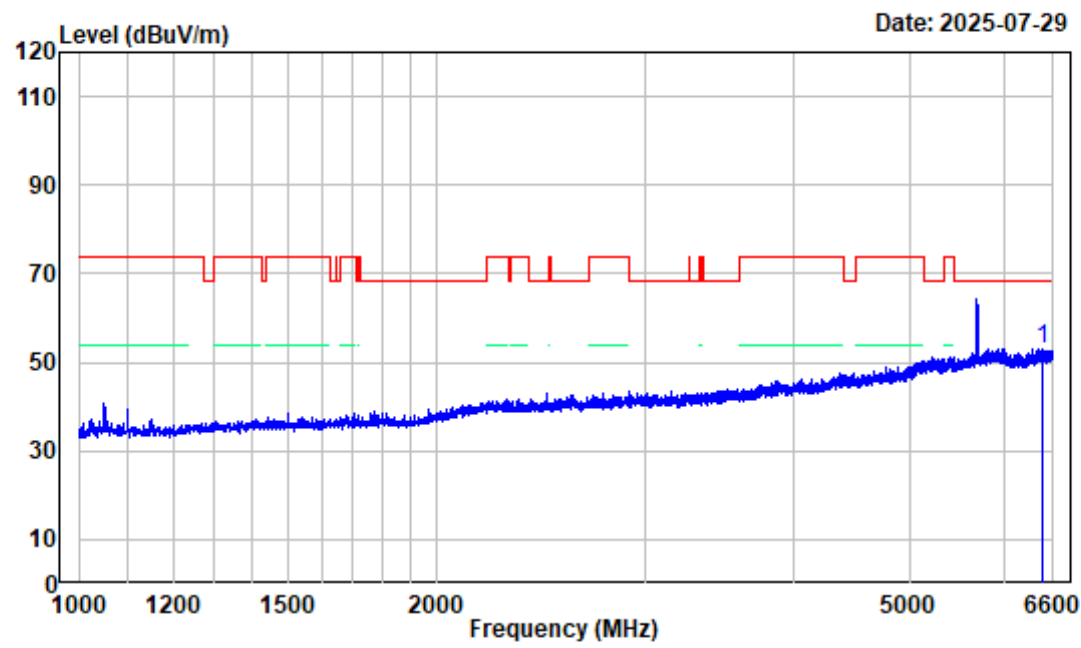

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6464.200	-3.68	56.80	53.12	68.20	-15.08 Peak


802.11ac20 High Channel 1GHz-6.6GHz_VERTICAL

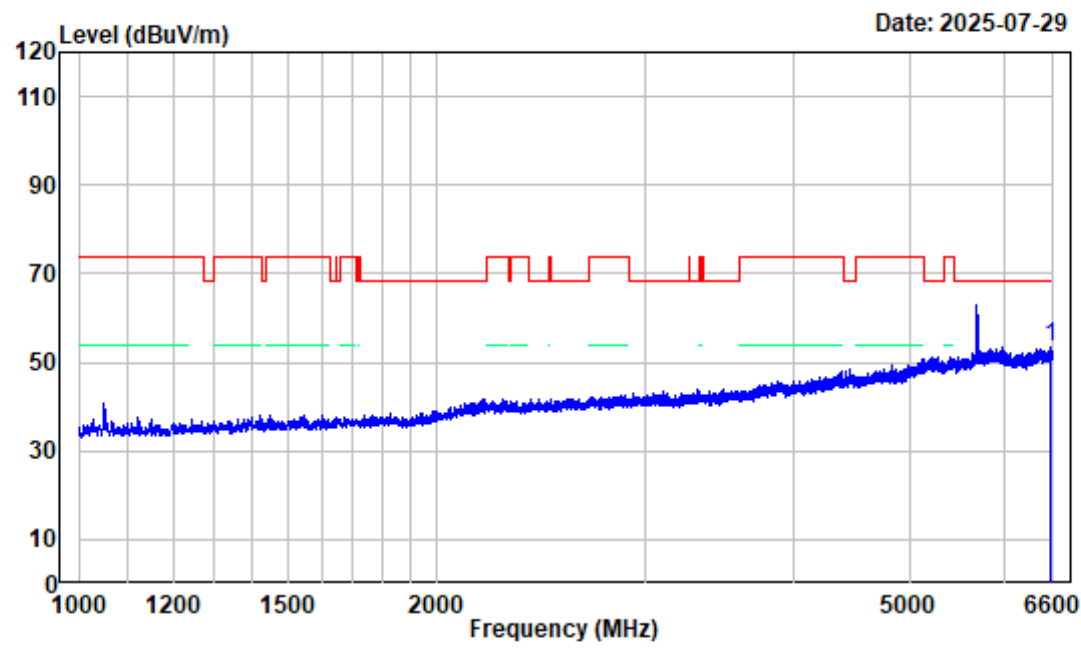

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6565.000	-3.66	56.93	53.27	68.20	-14.93 Peak


802.11ac20 High Channel 6.6GHz-18GHz_HORIZONTAL

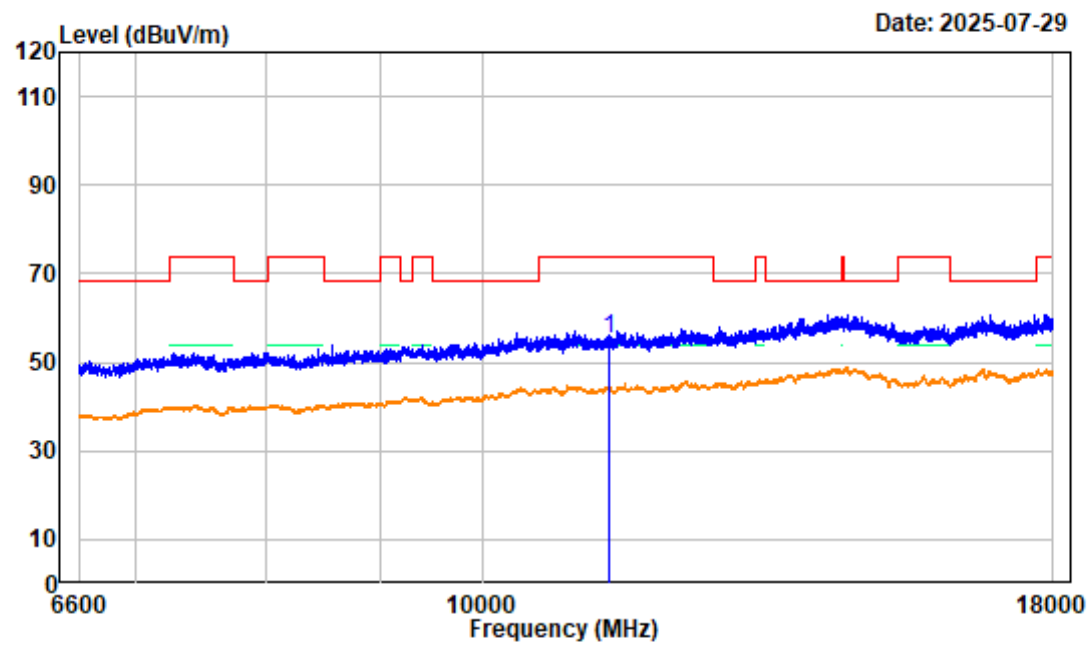

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11399.400	5.66	49.66	55.32	74.00	-18.68	Peak


802.11ac20 High Channel 6.6GHz-18GHz_VERTICAL

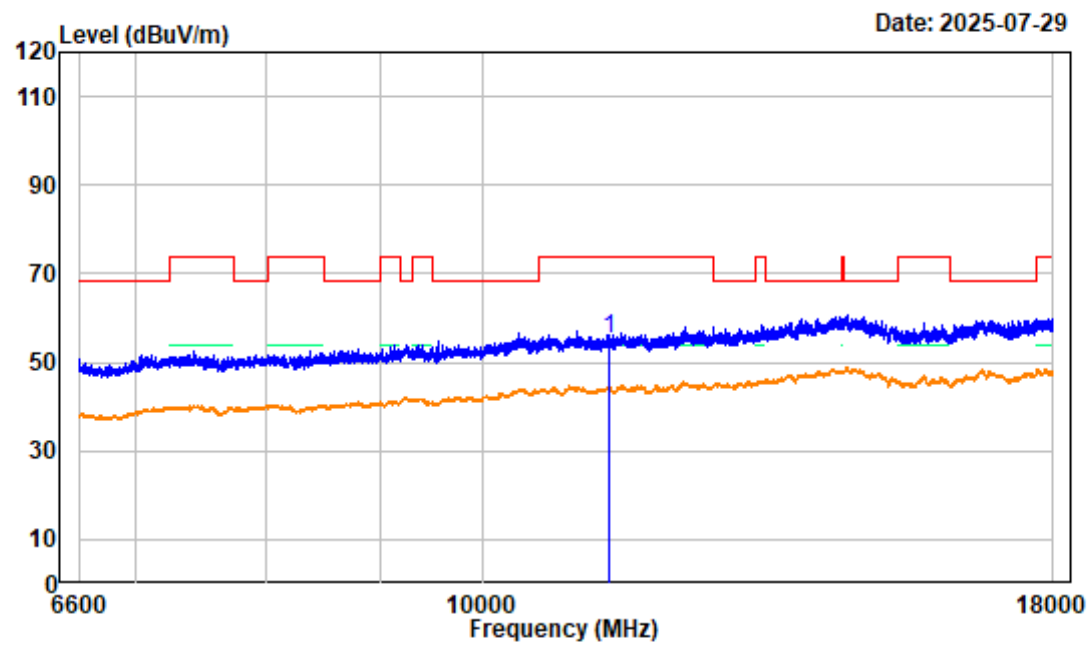

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11399.400	5.66	49.38	55.04	74.00	-18.96	Peak


802.11ac20 High Channel Bandedge_HORIZONTAL

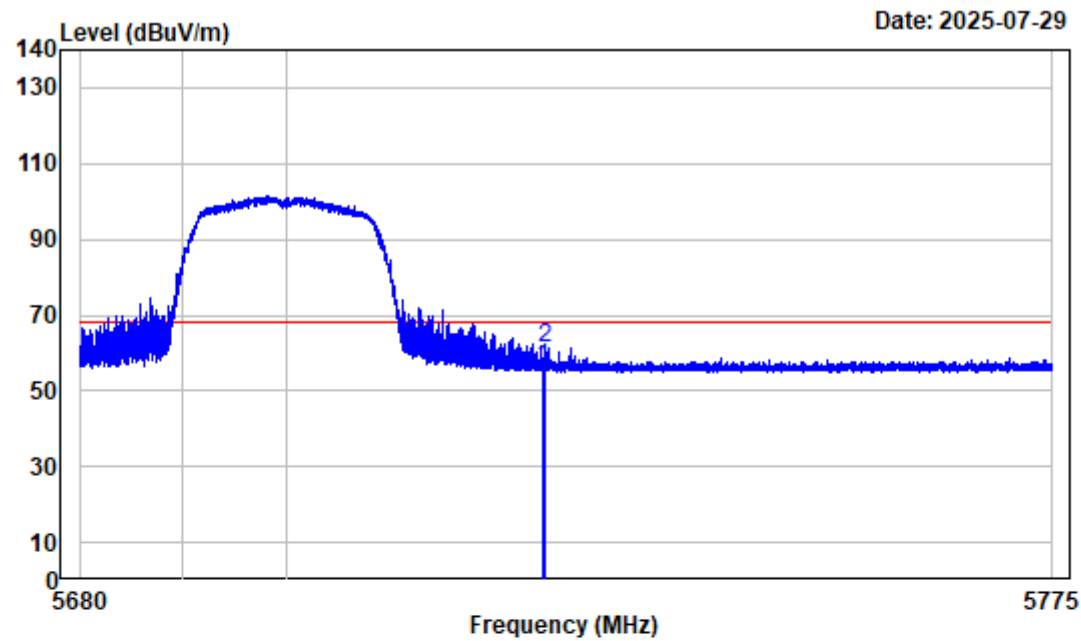

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	60.25	55.79	68.20	-12.41	Peak
2	5725.327	-4.45	65.84	61.39	68.20	-6.81	Peak


802.11ac20 High Channel Bandedge_VERTICAL

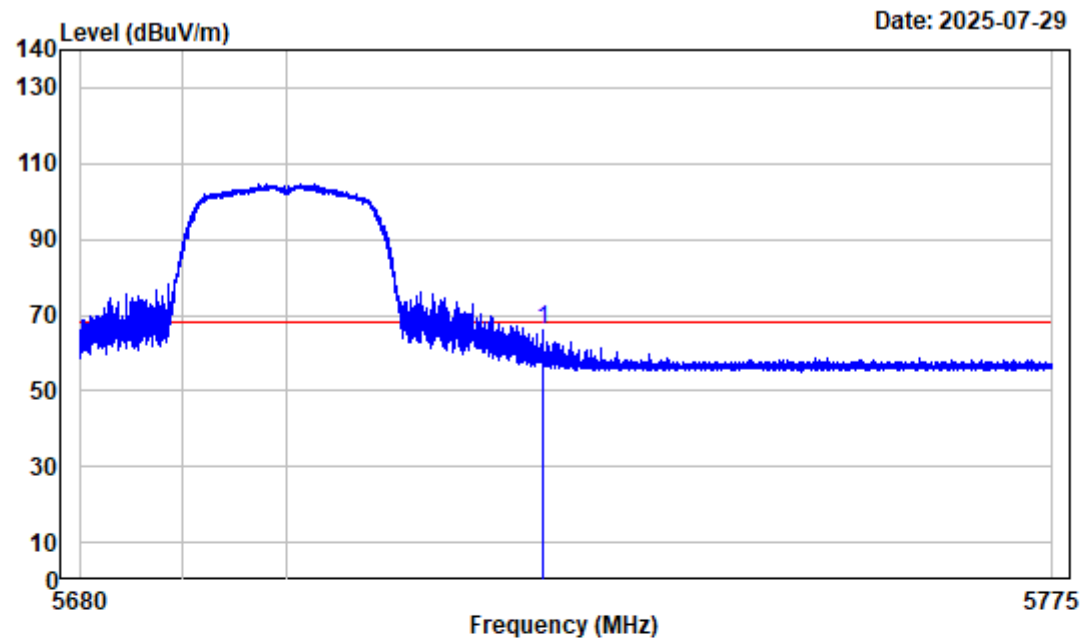

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-4.46	70.40	65.94	68.20	-2.26	Peak


802.11ac40 Low Channel 1GHz-6.6GHz_HORIZONTAL

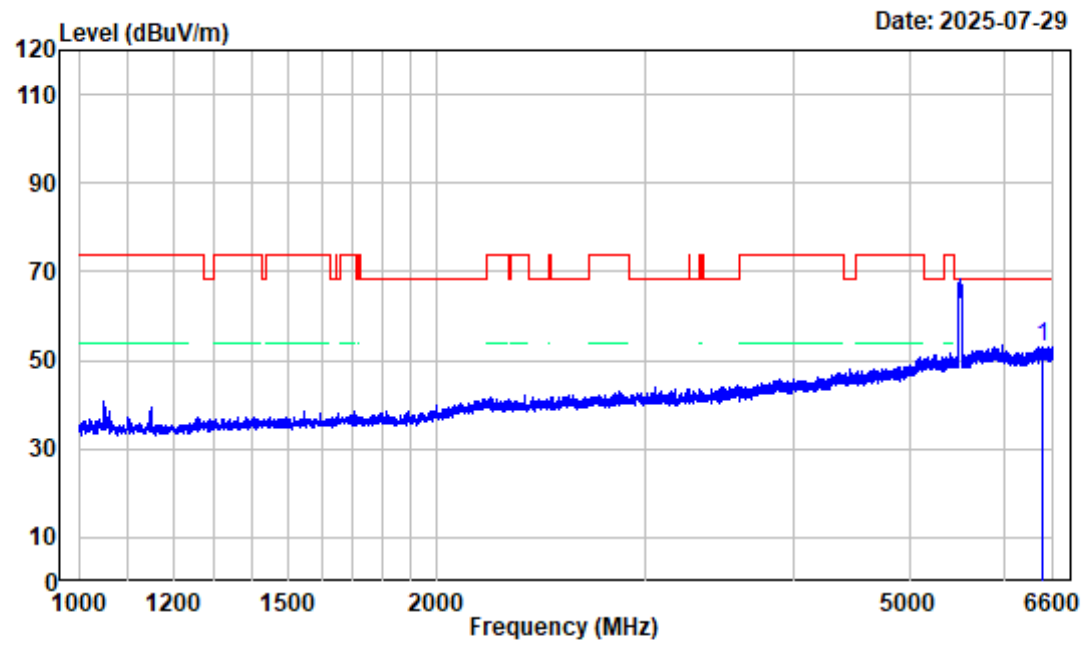

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5510MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6476.100	-3.71	56.70	52.99	68.20	-15.21 Peak


802.11ac40 Low Channel 1GHz-6.6GHz_VERTICAL

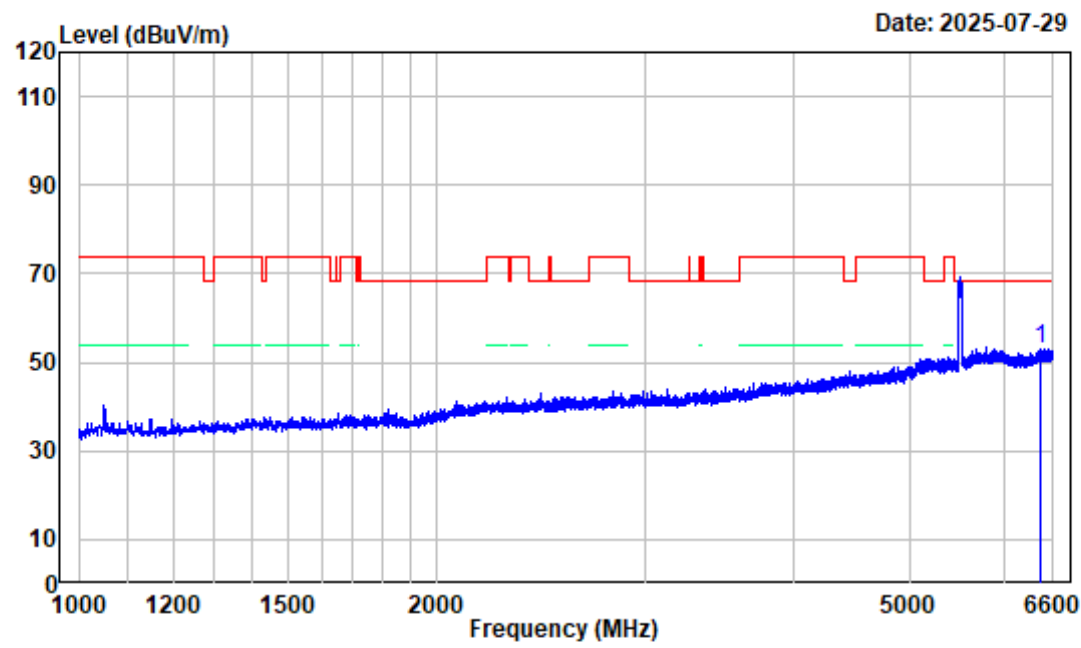

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5510MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6435.500	-3.63	56.68	53.05	68.20	-15.15 Peak


802.11ac40 Low Channel 6.6GHz-18GHz_HORIZONTAL

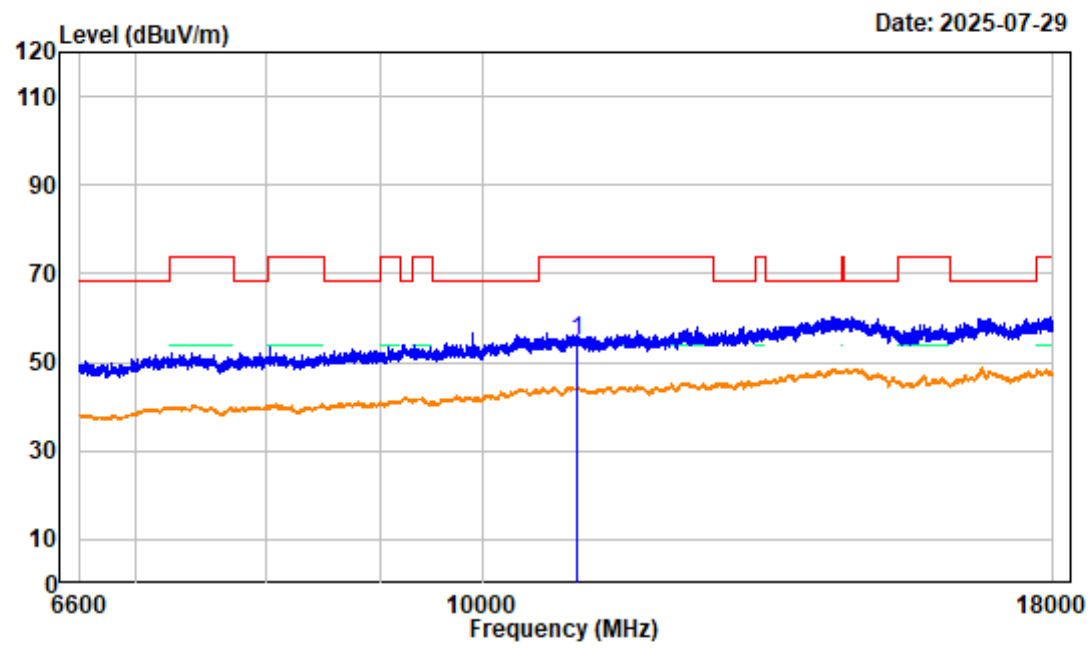

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5510MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11020.350	5.22	49.63	54.85	74.00	-19.15	Peak


802.11ac40 Low Channel 6.6GHz-18GHz_VERTICAL

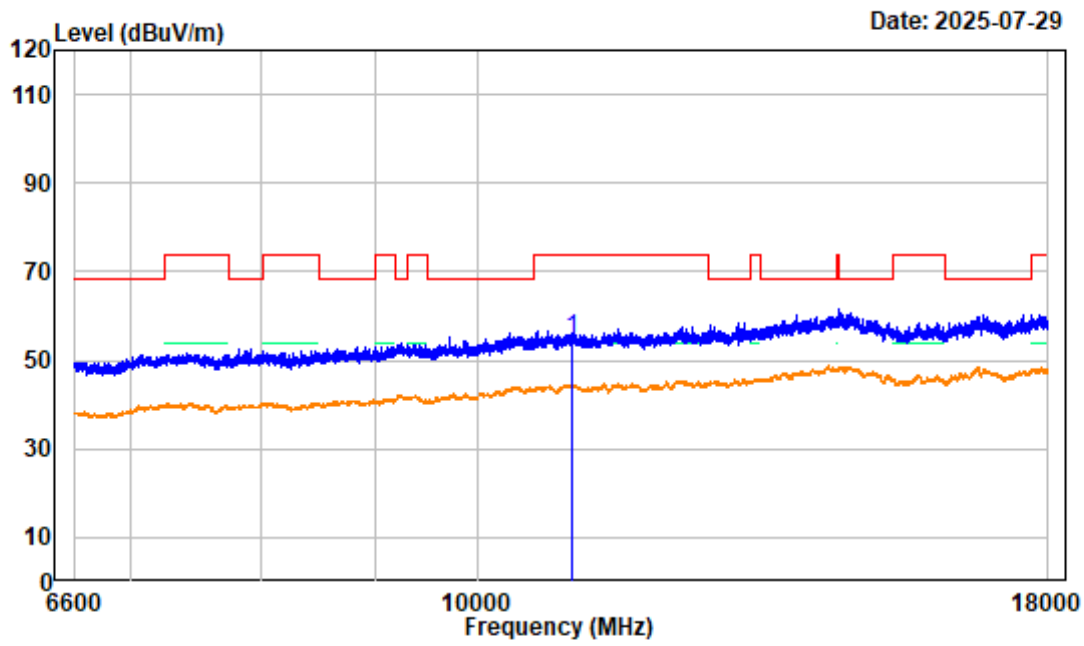

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5510MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11020.350	5.22	49.51	54.73	74.00	-19.27	Peak


802.11ac40 Low Channel Bandedge_HORIZONTAL

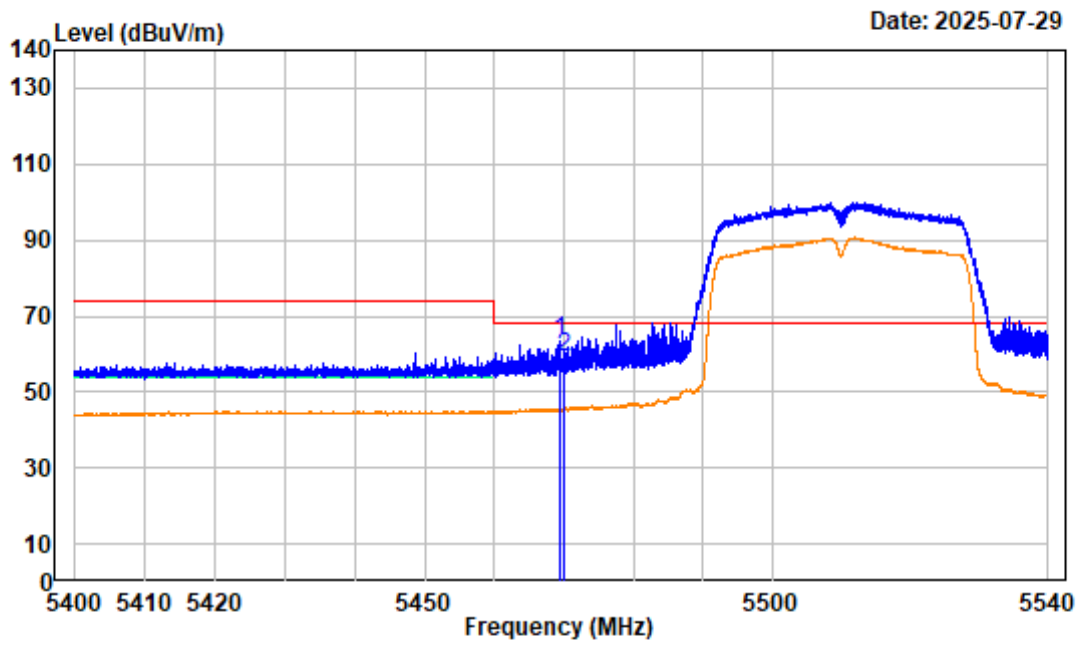

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5510MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5469.300	-5.61	69.17	63.56	68.20	-4.64 Peak
2	5470.000	-5.61	64.78	59.17	68.20	-9.03 Peak


802.11ac40 Low Channel Bandedge_VERTICAL

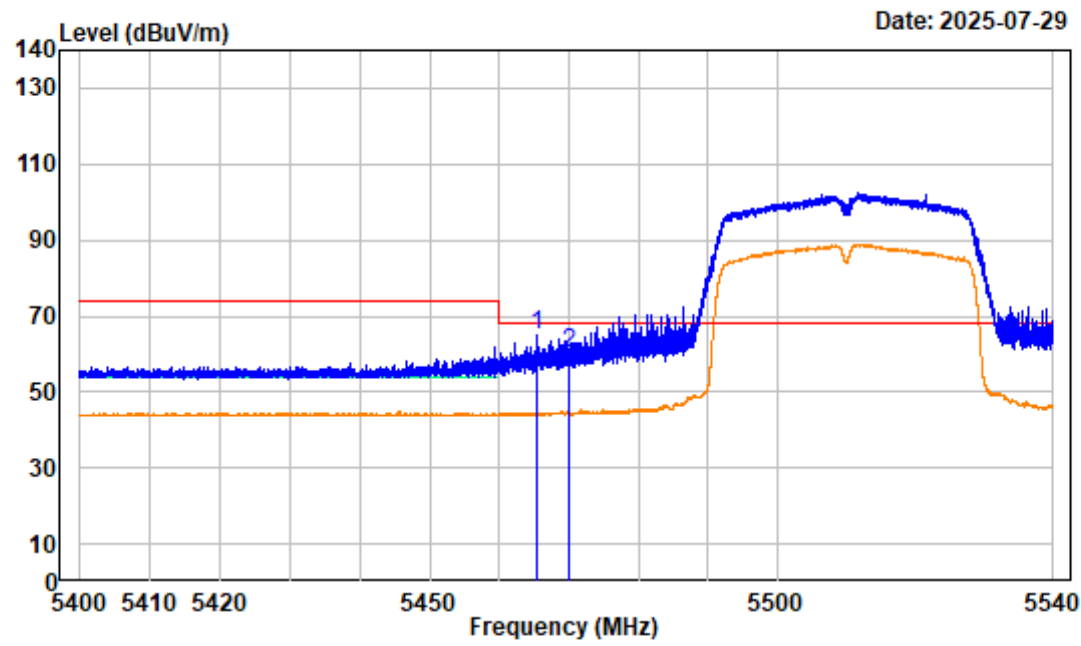

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5510MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5465.397	-5.60	70.40	64.80	68.20	-3.40 Peak
2	5470.000	-5.61	65.65	60.04	68.20	-8.16 Peak


802.11ac40 Middle Channel 1GHz-6.6GHz_HORIZONTAL

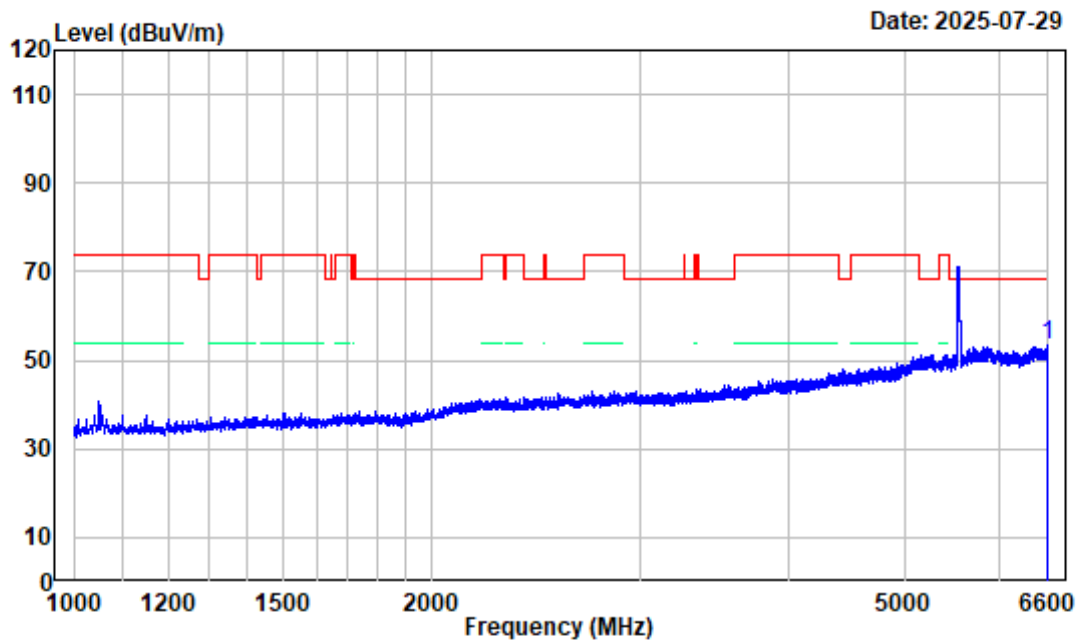

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Middle Channel 5550MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6584.600	-3.60	56.91	53.31	68.20	-14.89 Peak


802.11ac40 Middle Channel 1GHz-6.6GHz_VERTICAL

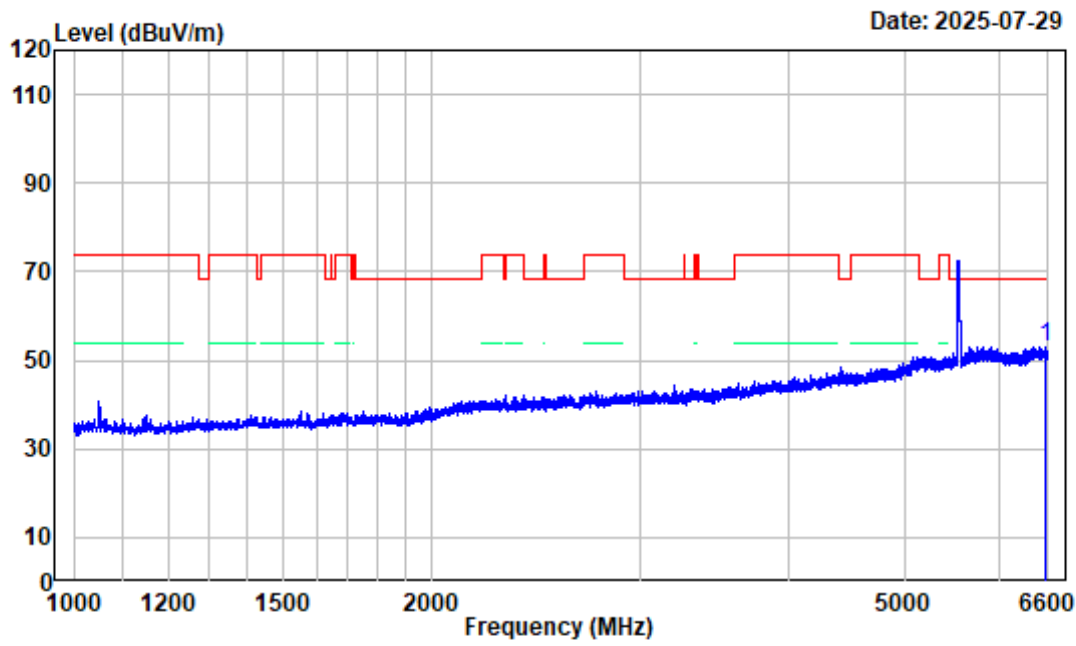

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Middle Channel 5550MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6568.500	-3.65	56.69	53.04	68.20	-15.16 Peak

802.11ac40 Middle Channel 6.6GHz-18GHz_HORIZONTAL

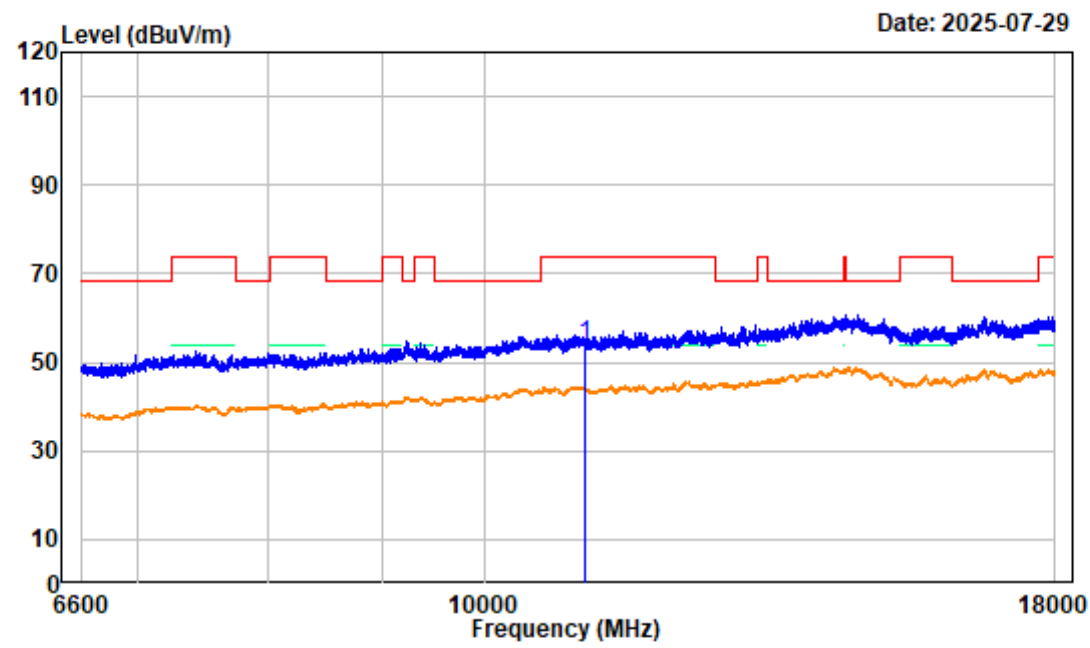

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac40 Middle Channel 5550MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11100.150	4.76	49.02	53.78	74.00	-20.22	Peak


802.11ac40 Middle Channel 6.6GHz-18GHz_VERTICAL

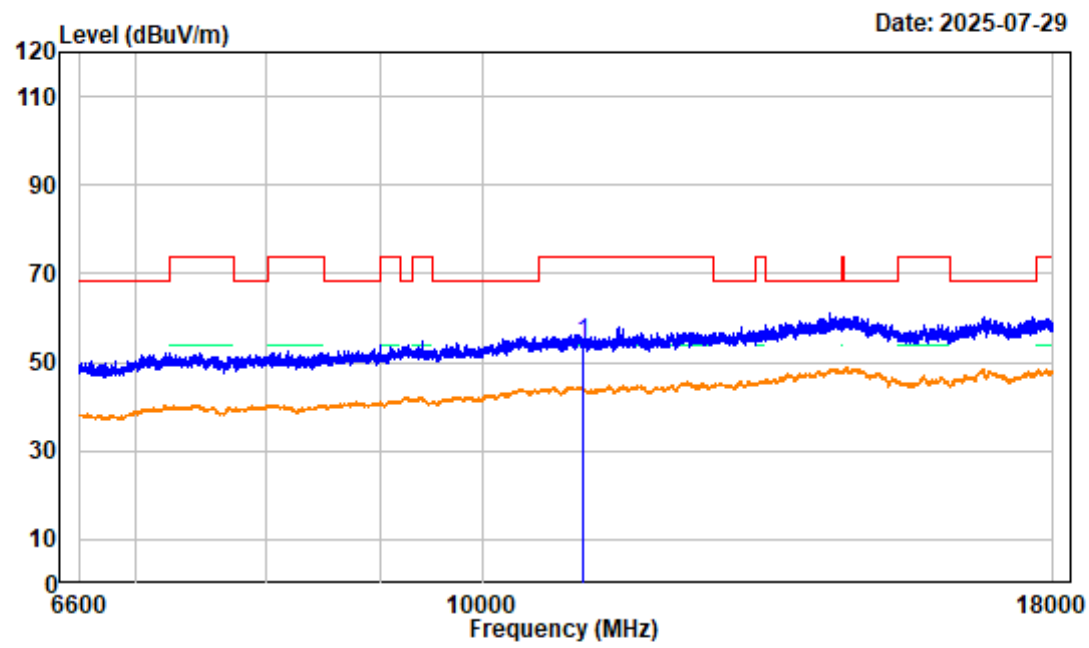

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Middle Channel 5550MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11100.150	4.76	49.77	54.53	74.00	-19.47	Peak


802.11ac40 High Channel 1GHz-6.6GHz_HORIZONTAL

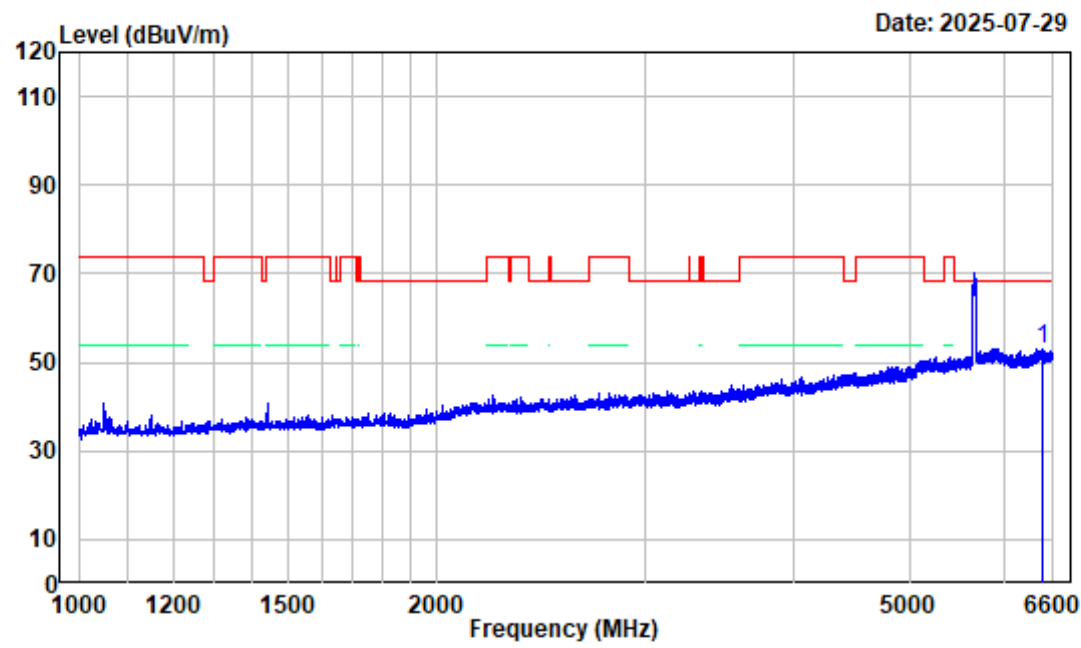

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5670MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6456.500	-3.64	56.63	52.99	68.20	-15.21 Peak


802.11ac40 High Channel 1GHz-6.6GHz_VERTICAL

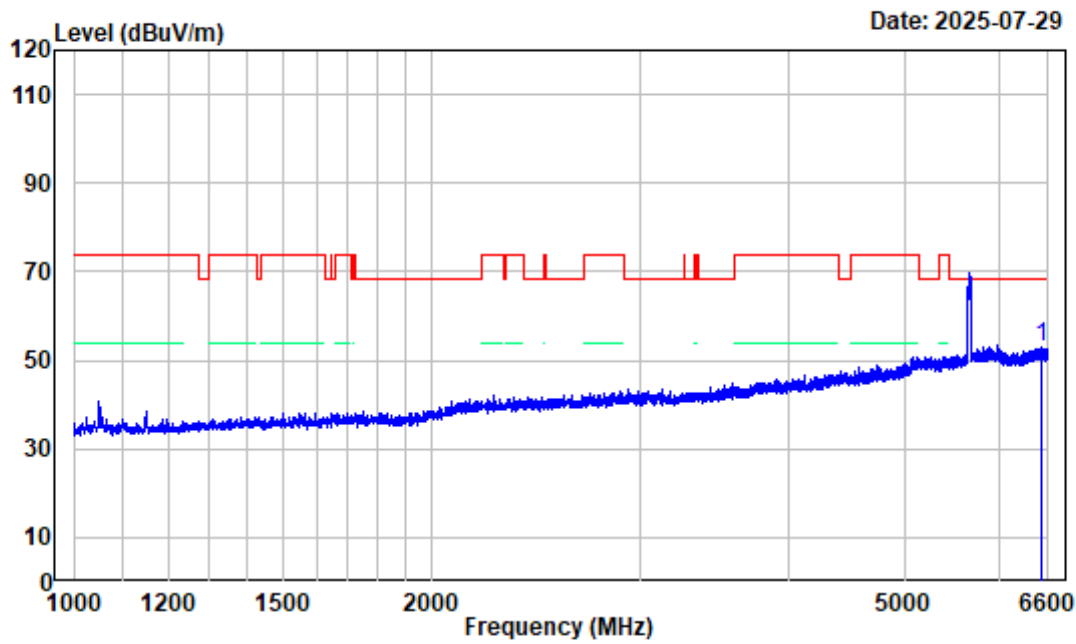

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5670MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6528.600	-3.76	56.54	52.78	68.20	-15.42 Peak


802.11ac40 High Channel 6.6GHz-18GHz_HORIZONTAL

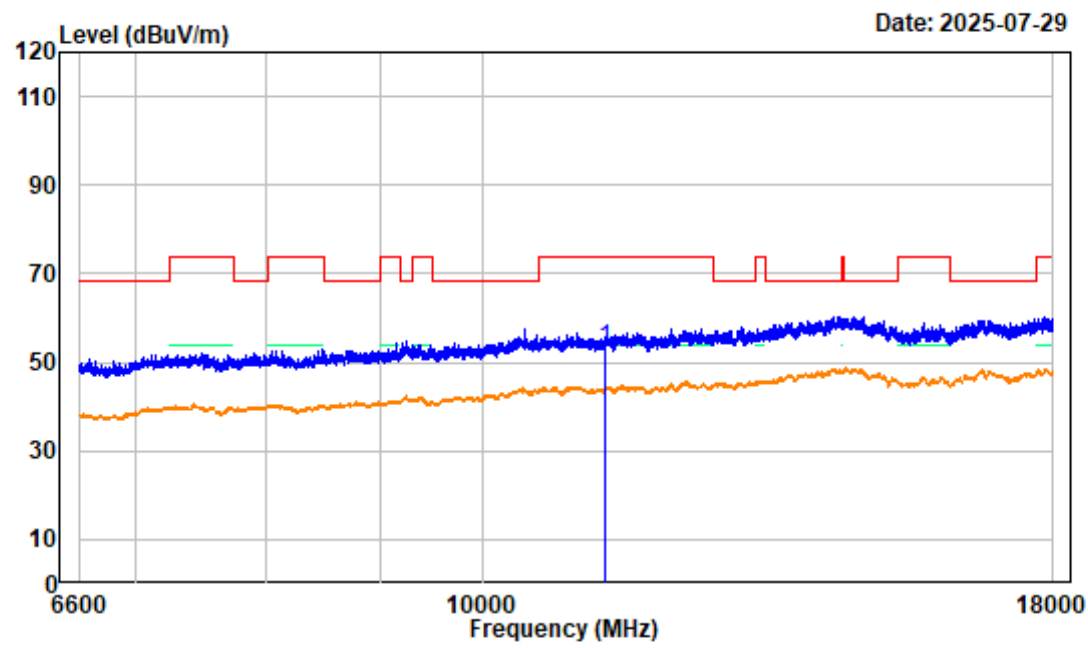

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5670MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11339.550	4.91	48.26	53.17	74.00	-20.83	Peak


802.11ac40 High Channel 6.6GHz-18GHz_VERTICAL

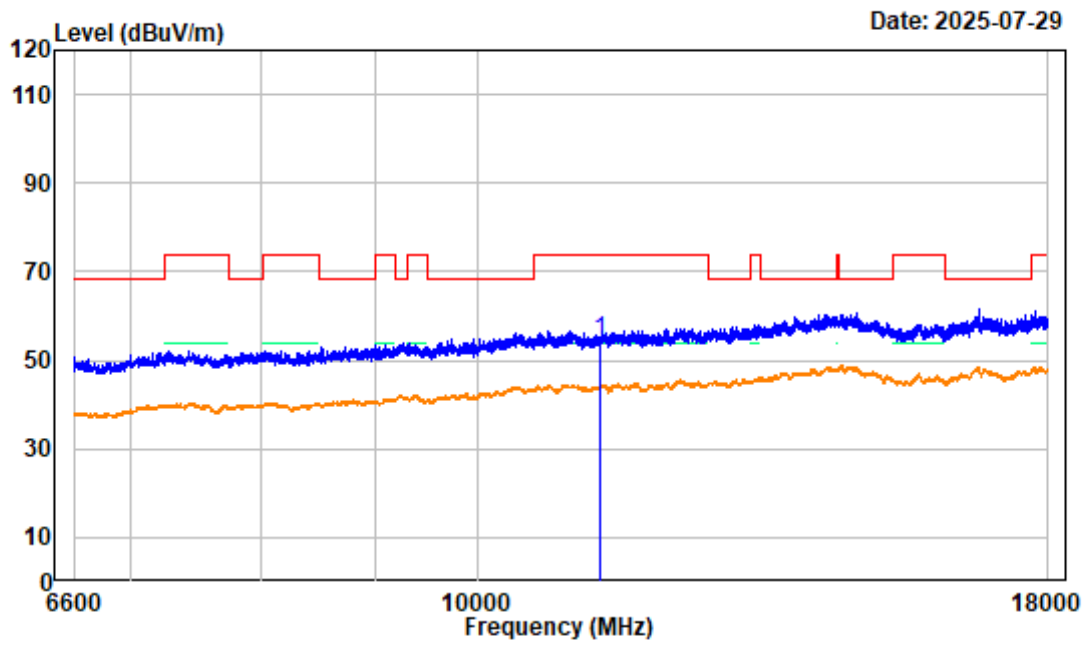

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5670MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11339.550	4.91	49.24	54.15	74.00	-19.85	Peak


802.11ac40 High Channel Bandedge_HORIZONTAL

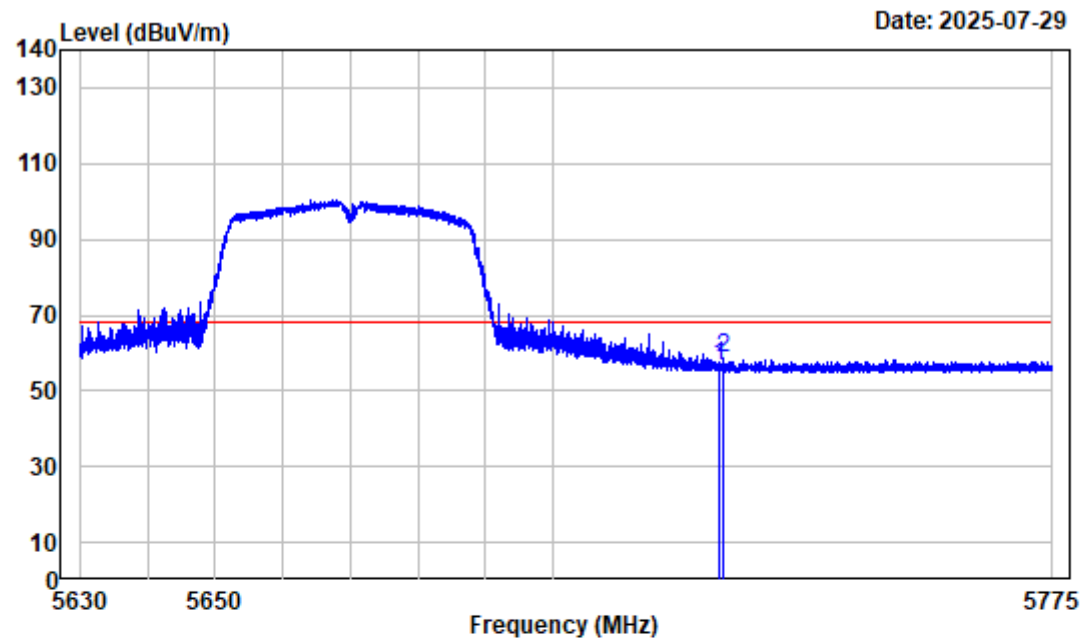

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5670MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	60.99	56.53	68.20	-11.67 Peak
2	5725.500	-4.45	63.03	58.58	68.20	-9.62 Peak


802.11ac40 High Channel Bandedge_VERTICAL

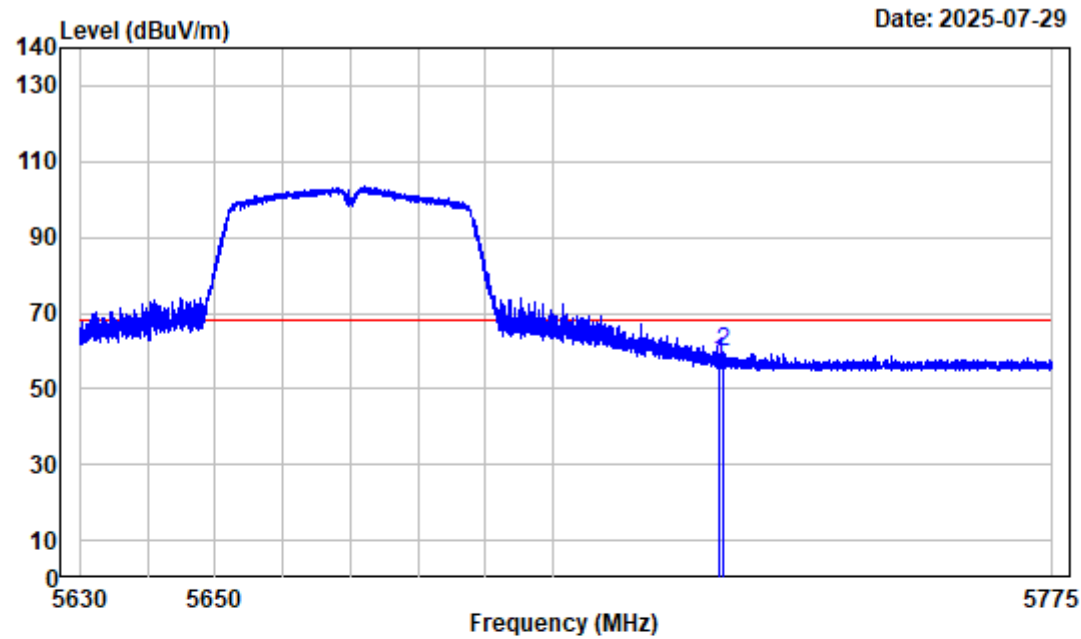

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5670MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	61.73	57.27	68.20	-10.93	Peak
2	5725.537	-4.45	64.17	59.72	68.20	-8.48	Peak


802.11ac80 Low Channel 1GHz-6.6GHz_HORIZONTAL

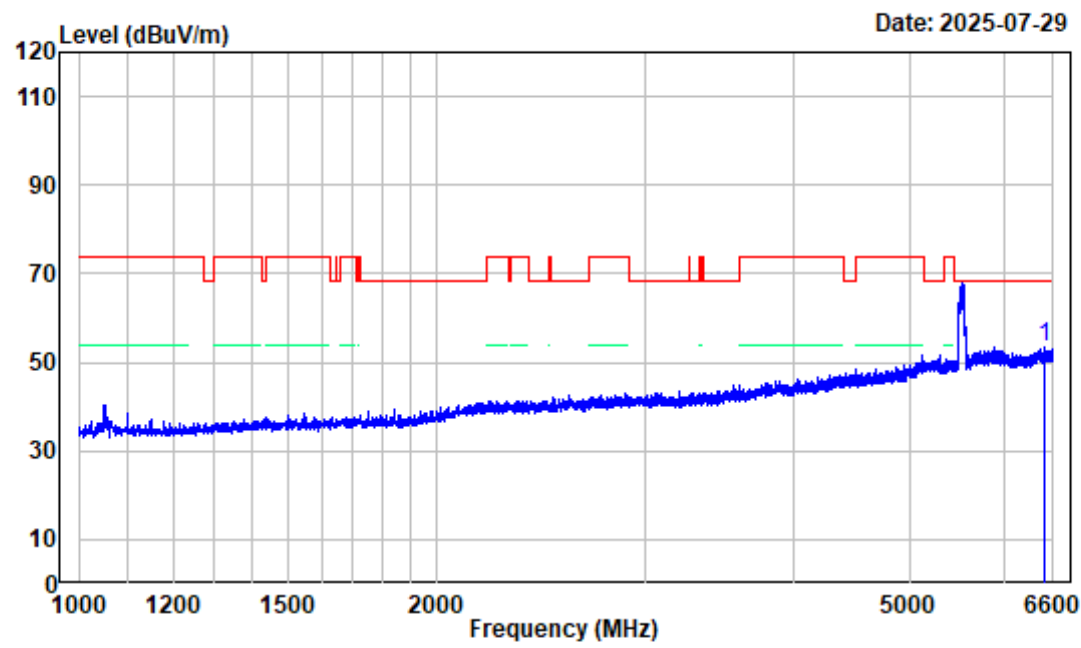

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Low Channel 5530MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6490.800	-3.78	57.03	53.25	68.20	-14.95	Peak


802.11ac80 Low Channel 1GHz-6.6GHz_VERTICAL

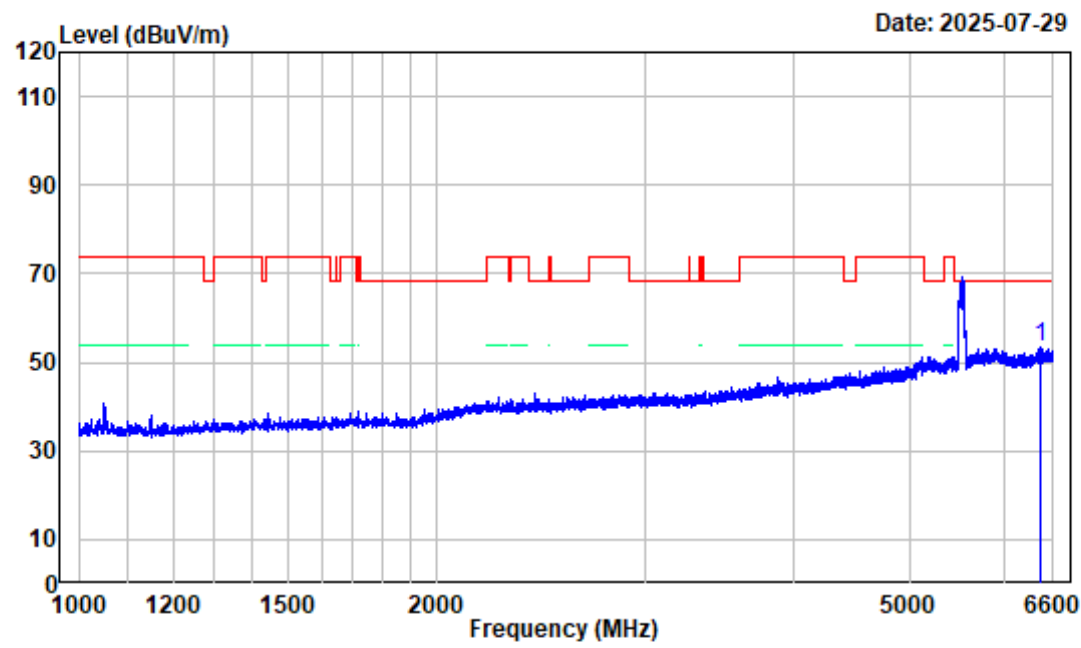

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Low Channel 5530MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6443.200	-3.62	57.12	53.50	68.20	-14.70 Peak


802.11ac80 Low Channel 6.6GHz-18GHz_HORIZONTAL

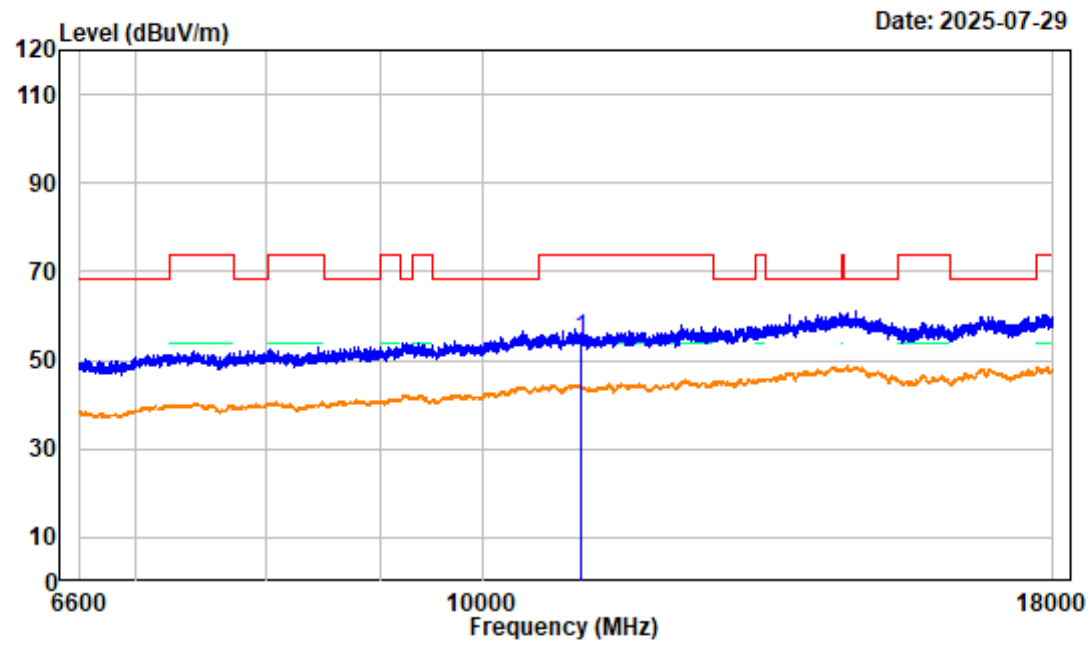

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Low Channel 5530MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11060.250	5.07	49.72	54.79	74.00	-19.21	Peak


802.11ac80 Low Channel 6.6GHz-18GHz_VERTICAL

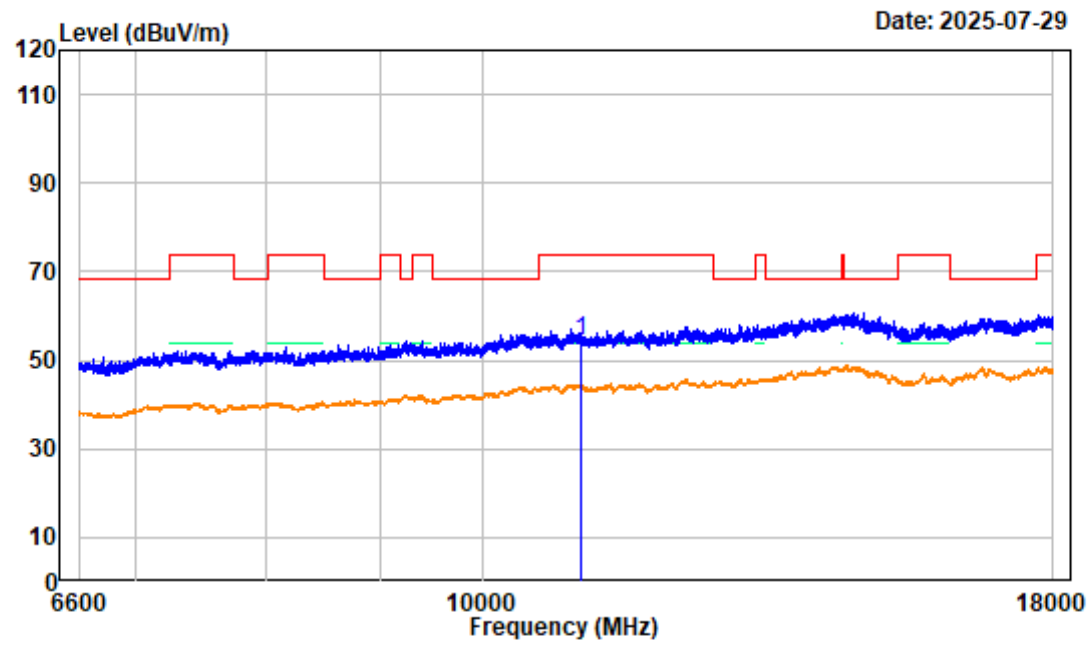

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Low Channel 5530MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11060.250	5.07	49.44	54.51	74.00	-19.49	Peak


802.11ac80 Low Channel Bandedge_HORIZONTAL

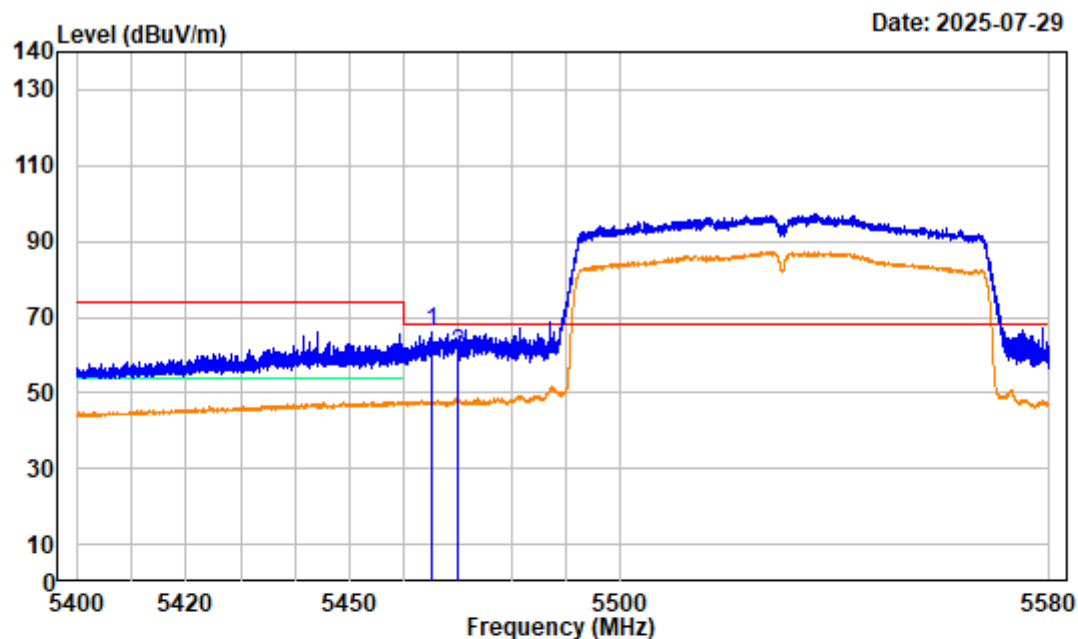

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Low Channel 5530MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5465.070	-5.60	71.78	66.18	68.20	-2.02	Peak
2	5470.000	-5.61	65.69	60.08	68.20	-8.12	Peak

802.11ac80 Low Channel Bandedge_VERTICAL

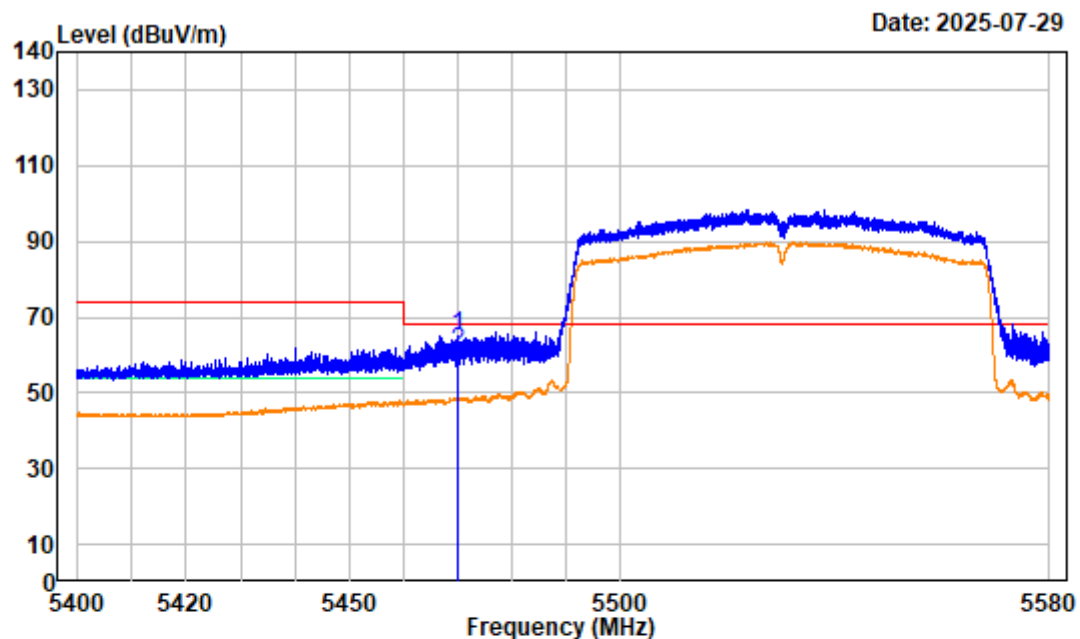

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac80 Low Channel 5530MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5469.683	-5.61	70.65	65.04	68.20	-3.16	Peak
2	5470.000	-5.61	66.57	60.96	68.20	-7.24	Peak


802.11ac80 High Channel 1GHz-6.6GHz_HORIZONTAL

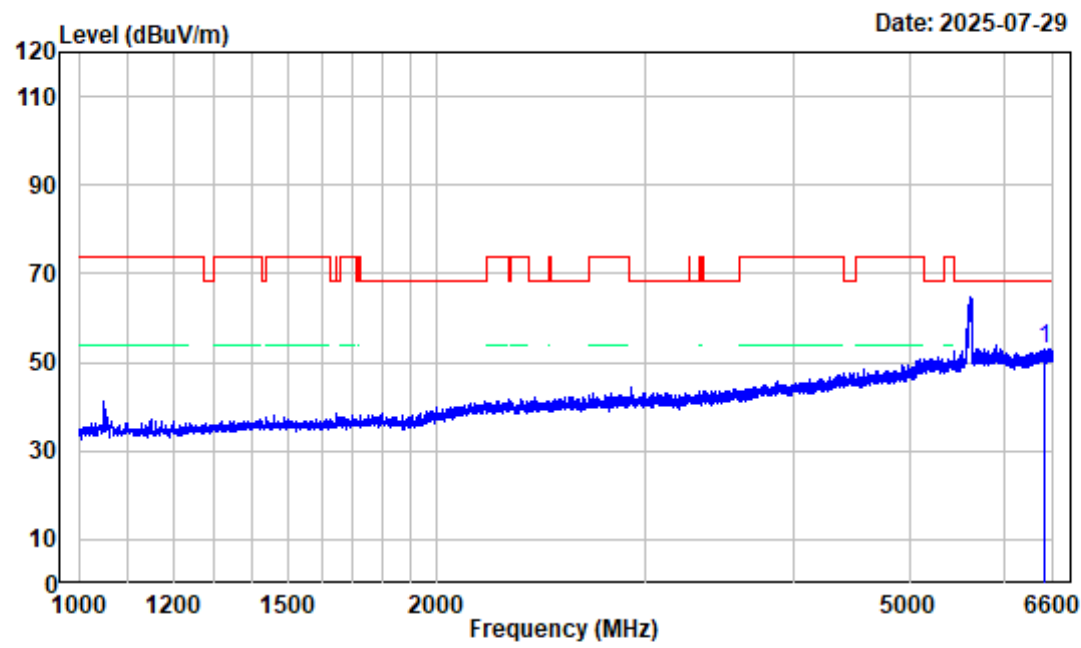

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 High Channel 5610MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6501.300	-3.82	56.91	53.09	68.20	-15.11	Peak


802.11ac80 High Channel 1GHz-6.6GHz_VERTICAL

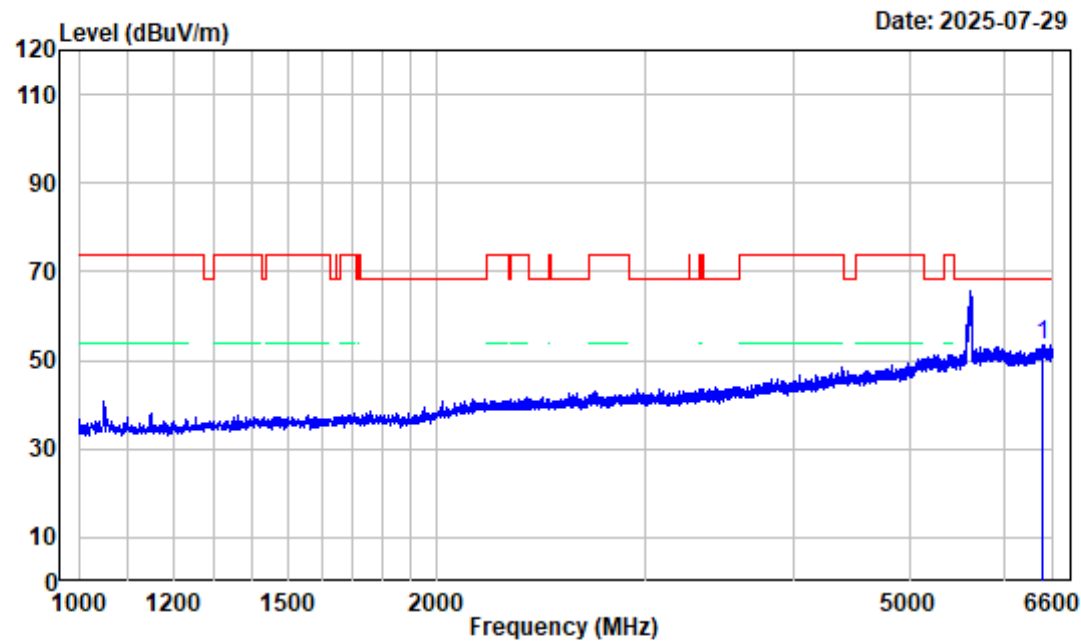

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 High Channel 5610MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6467.700	-3.69	57.20	53.51	68.20	-14.69 Peak


802.11ac80 High Channel 6.6GHz-18GHz_HORIZONTAL

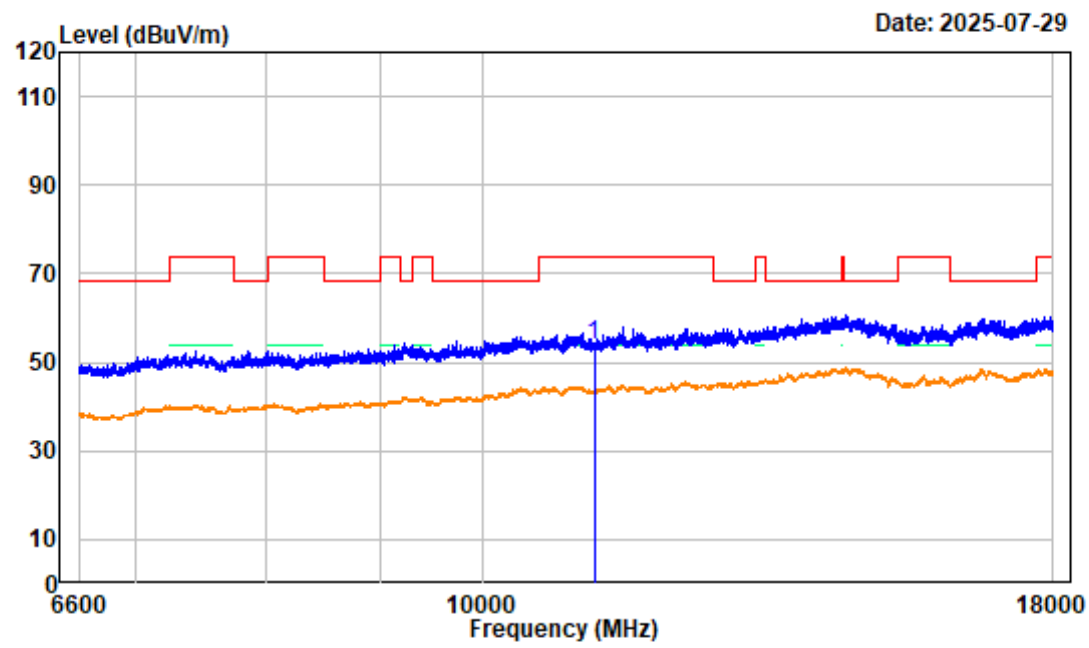

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 High Channel 5610MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11219.850	4.51	49.47	53.98	74.00	-20.02	Peak


802.11ac80 High Channel 6.6GHz-18GHz_VERTICAL

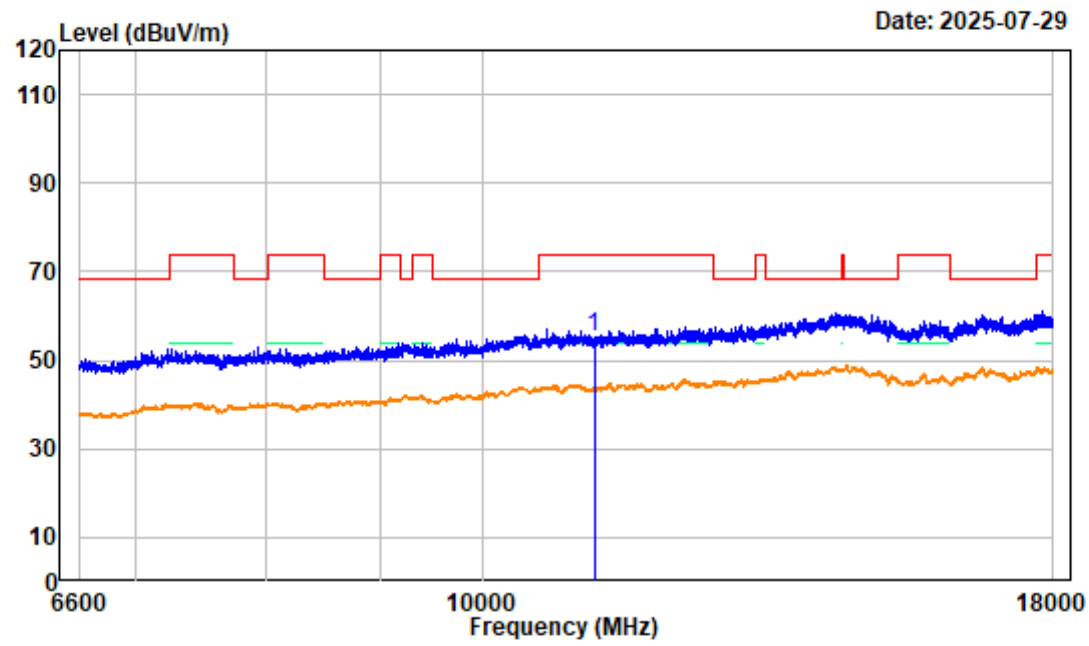

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 High Channel 5610MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11219.850	4.51	50.64	55.15	74.00	-18.85	Peak


802.11ac80 High Channel Bandedge_HORIZONTAL

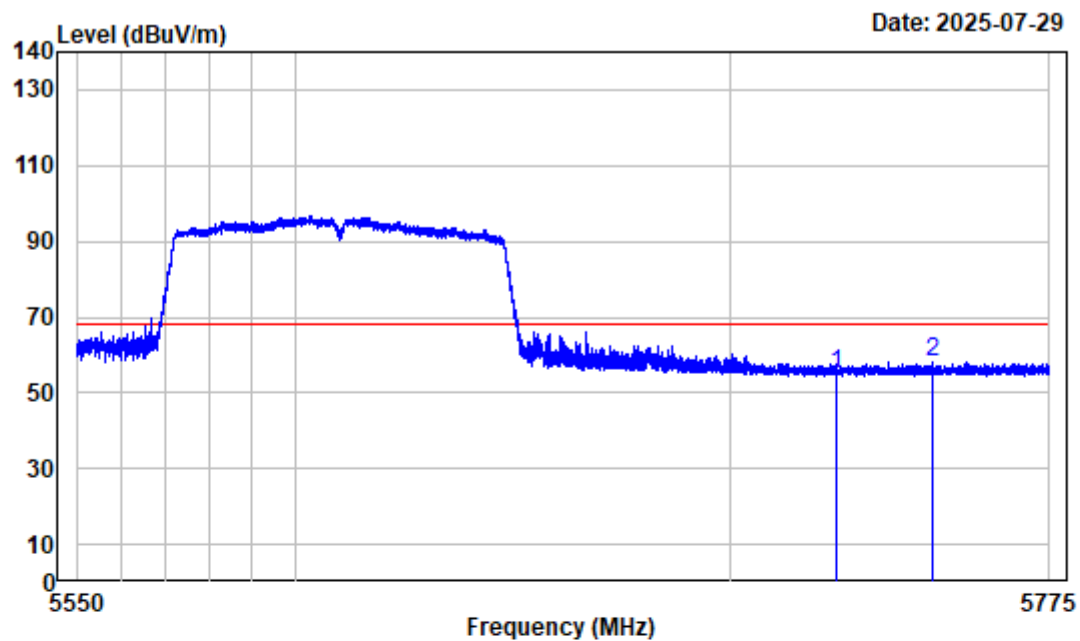

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 High Channel 5610MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	59.55	55.09	68.20	-13.11	Peak
2	5747.690	-4.49	62.49	58.00	68.20	-10.20	Peak


802.11ac80 High Channel Bandedge_VERTICAL

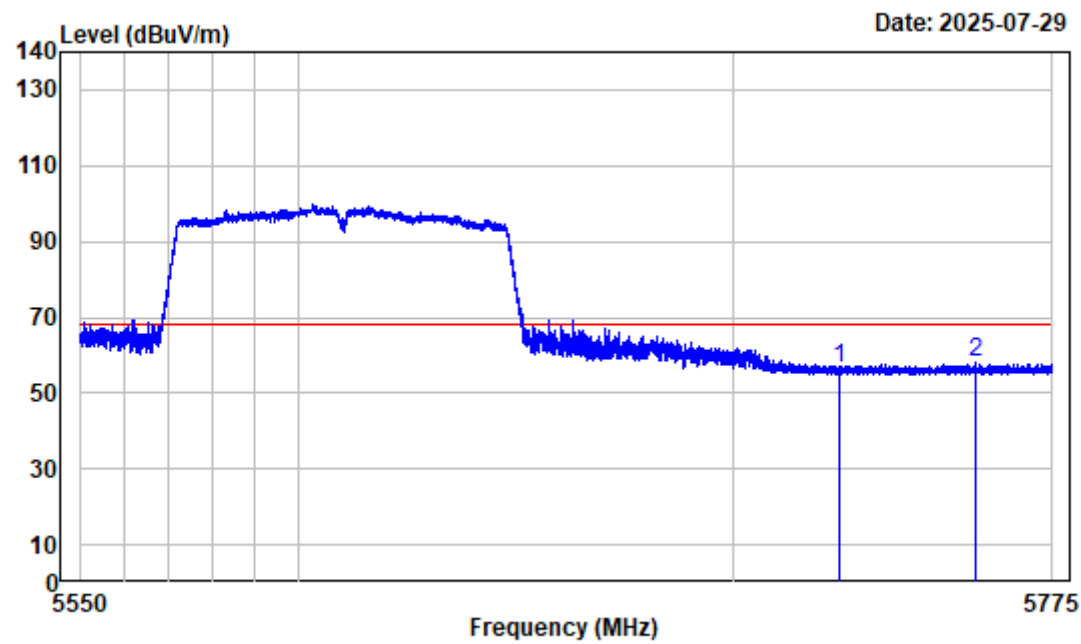

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 High Channel 5610MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	61.00	56.54	68.20	-11.66 Peak
2	5756.803	-4.52	62.66	58.14	68.20	-10.06 Peak


802.11a Low Channel 1GHz-6.6GHz_HORIZONTAL

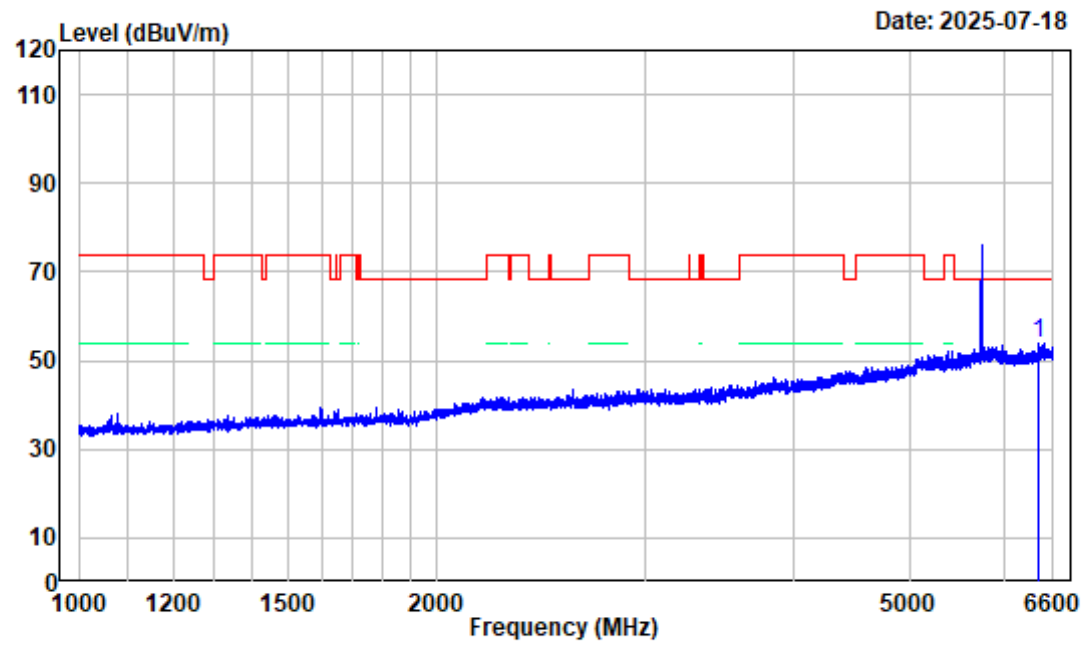

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6420.800	-3.64	57.53	53.89	68.20	-14.31 peak


802.11a Low Channel 1GHz-6.6GHz_VERTICAL

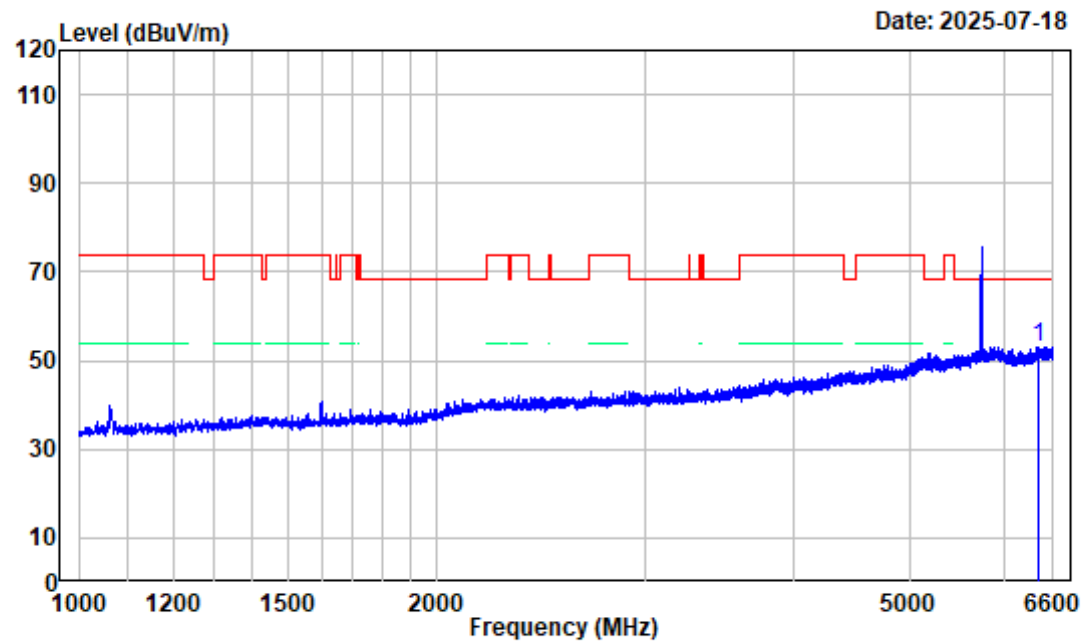

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6418.000	-3.64	56.85	53.21	68.20	-14.99	peak


802.11a Low Channel 6.6GHz-18GHz_HORIZONTAL

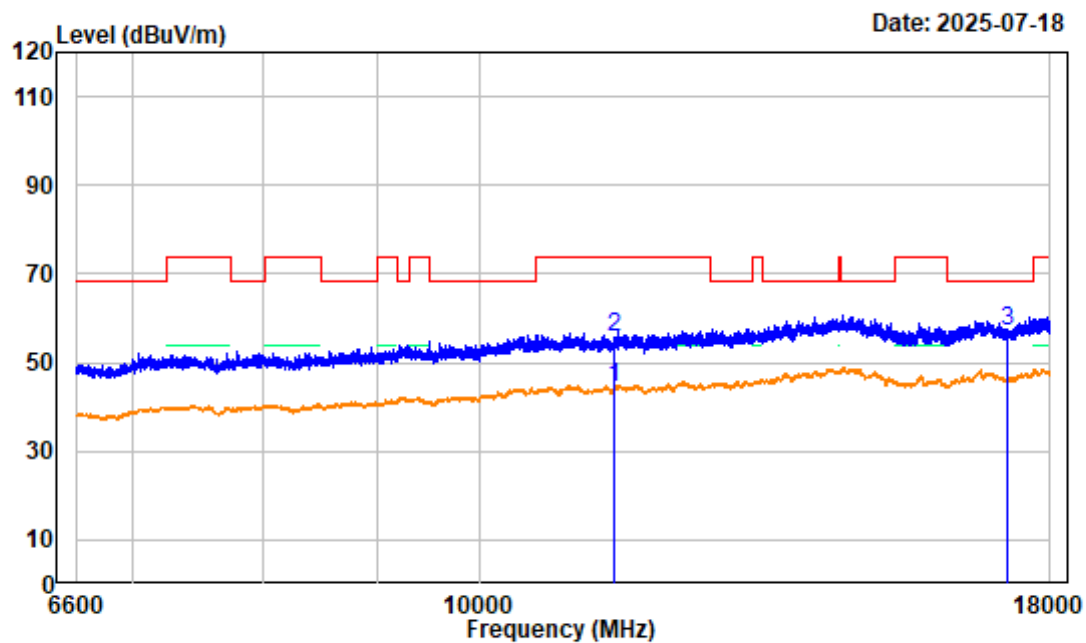

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.44	44.54	54.00	-9.46	Average
2	11490.000	6.10	49.41	55.51	74.00	-18.49	peak
3	17235.000	6.76	50.21	56.97	68.20	-11.23	peak

802.11a Low Channel 6.6GHz-18GHz_VERTICAL

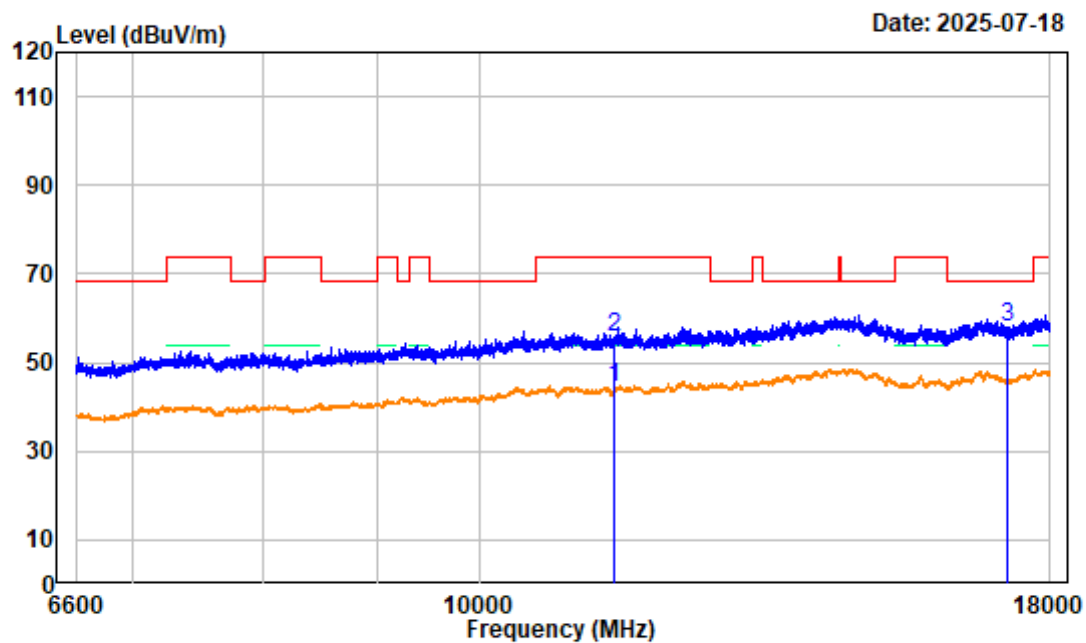

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11a Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.49	44.59	54.00	-9.41	Average
2	11490.000	6.10	49.42	55.52	74.00	-18.48	peak
3	17235.000	6.76	51.35	58.11	68.20	-10.09	peak


802.11a Low Channel Bandedge_HORIZONTAL

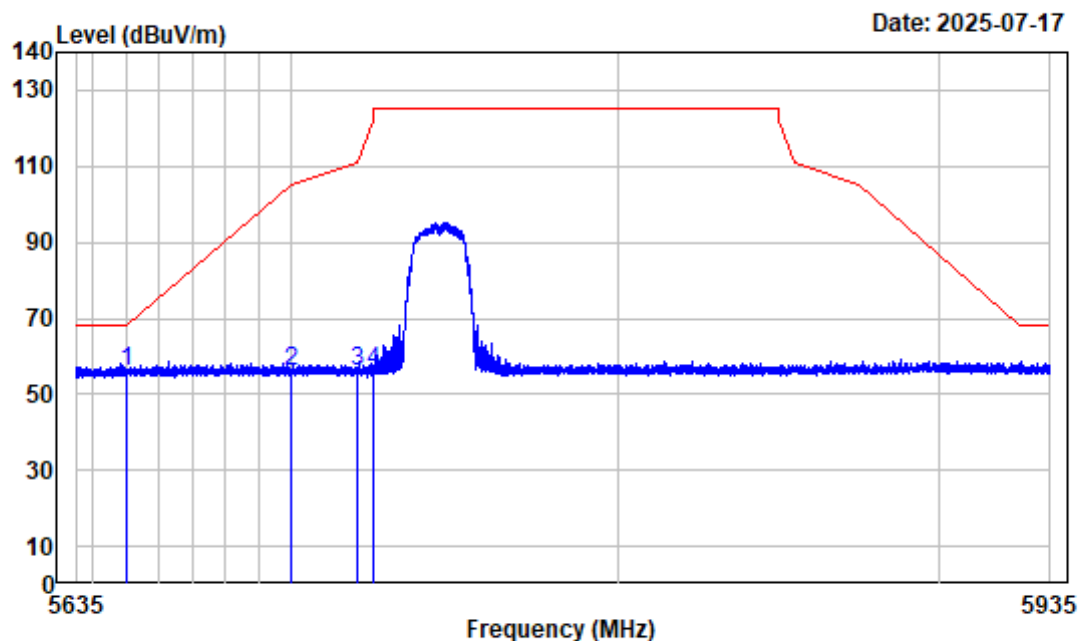

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.04	56.20	68.20	-12.00	peak
2	5700.000	-4.41	60.53	56.12	105.20	-49.08	peak
3	5720.000	-4.44	60.47	56.03	110.80	-54.77	peak
4	5725.000	-4.46	60.56	56.10	122.20	-66.10	peak


802.11a Low Channel Bandedge_VERTICAL

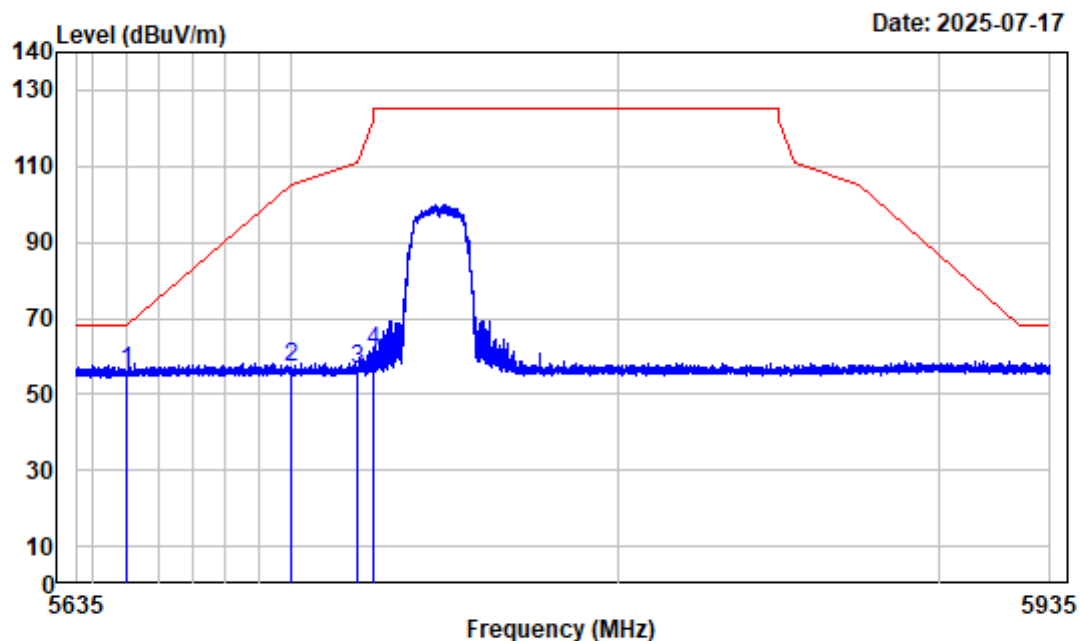

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.79	55.95	68.20	-12.25	peak
2	5700.000	-4.41	61.22	56.81	105.20	-48.39	peak
3	5720.000	-4.44	61.00	56.56	110.80	-54.24	peak
4	5725.000	-4.46	65.77	61.31	122.20	-60.89	peak


802.11a Middle Channel 1GHz-6.6GHz_HORIZONTAL

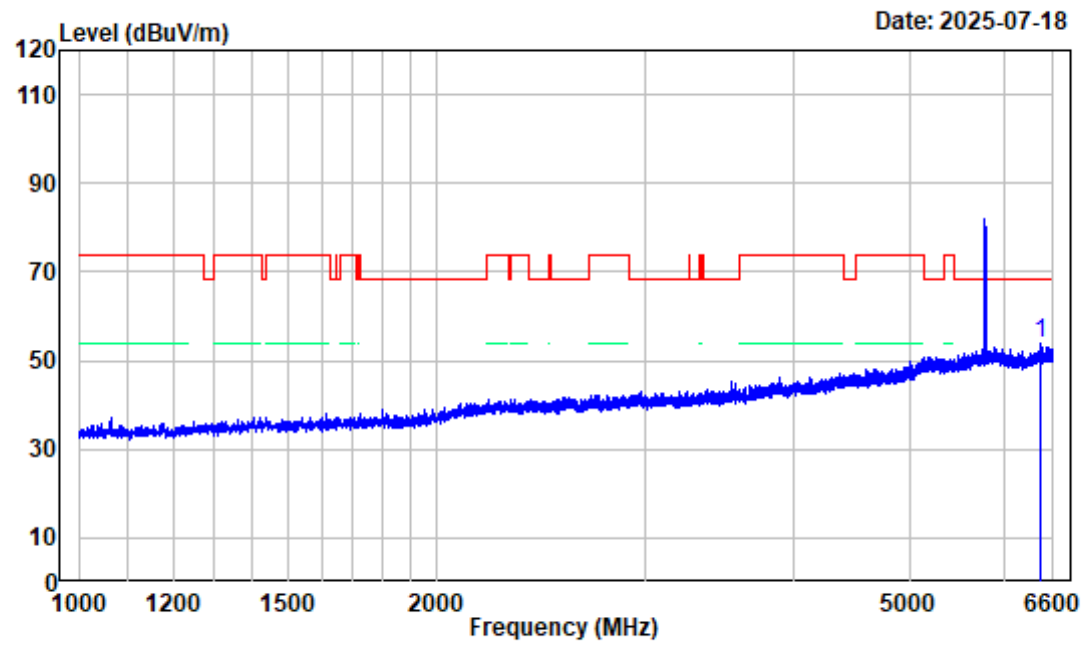

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6443.900	-3.62	57.39	53.77	68.20	-14.43 peak


802.11a Middle Channel 1GHz-6.6GHz_VERTICAL

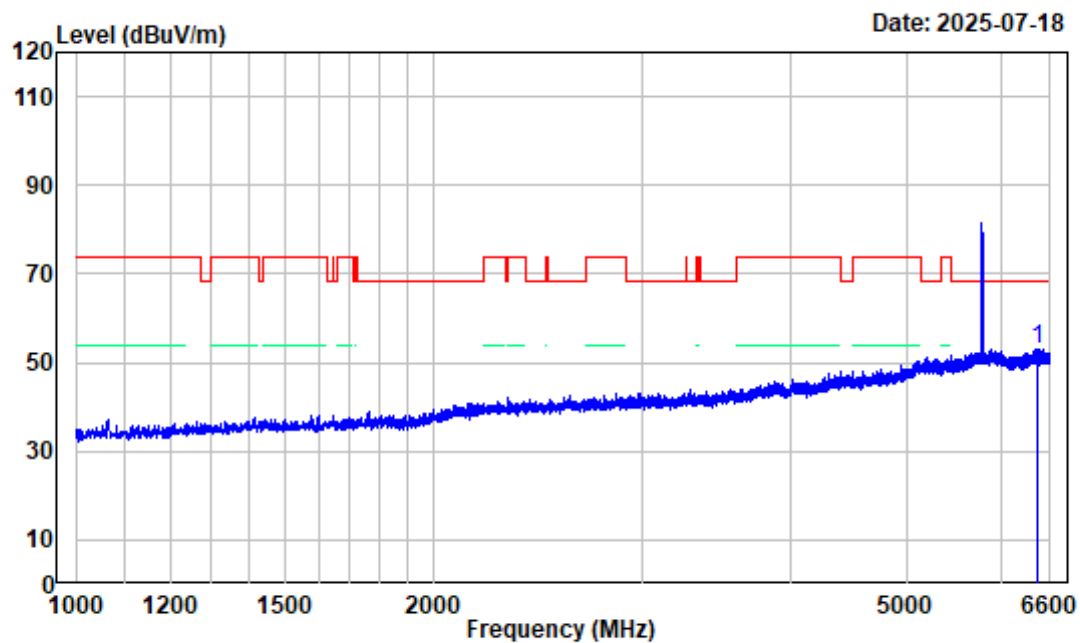

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6438.300	-3.63	56.76	53.13	68.20	-15.07	peak


802.11a Middle Channel 6.6GHz-18GHz_HORIZONTAL

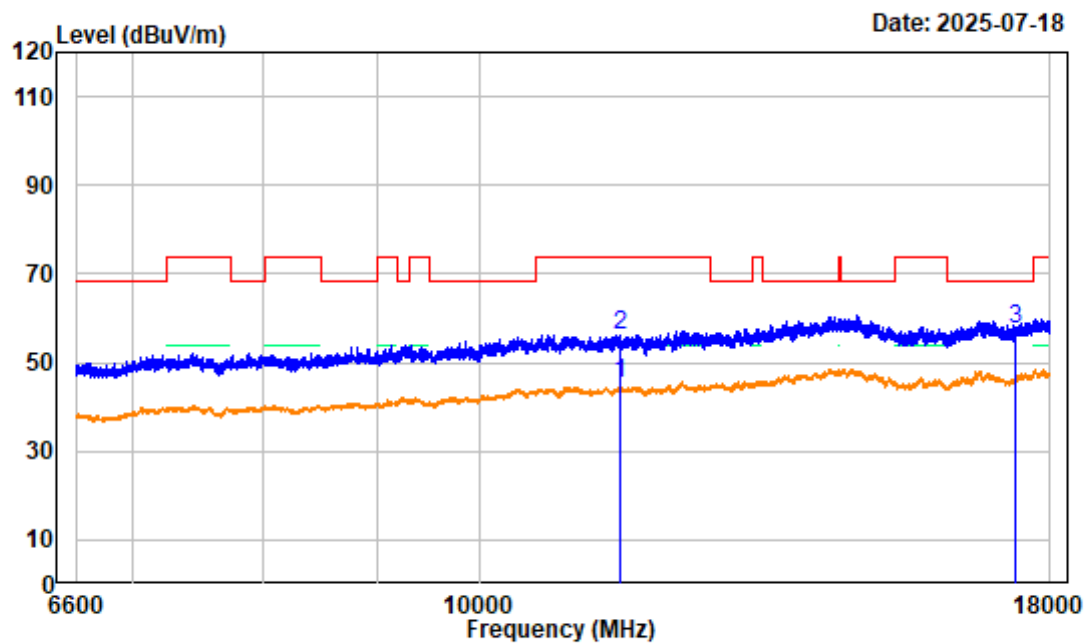

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	39.27	45.20	54.00	-8.80	Average
2	11570.000	5.93	50.24	56.17	74.00	-17.83	peak
3	17355.000	6.58	50.90	57.48	68.20	-10.72	peak


802.11a Middle Channel 6.6GHz-18GHz_VERTICAL

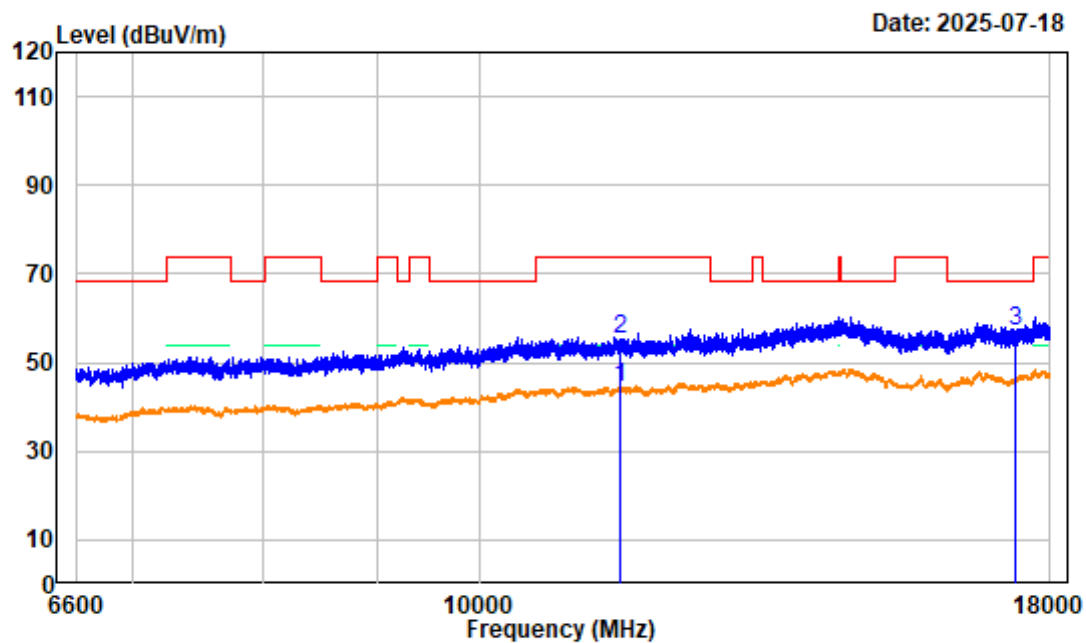

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.44	44.37	54.00	-9.63	Average
2	11570.000	5.93	49.42	55.35	74.00	-18.65	peak
3	17355.000	6.58	50.45	57.03	68.20	-11.17	peak


802.11a High Channel 1GHz-6.6GHz_HORIZONTAL

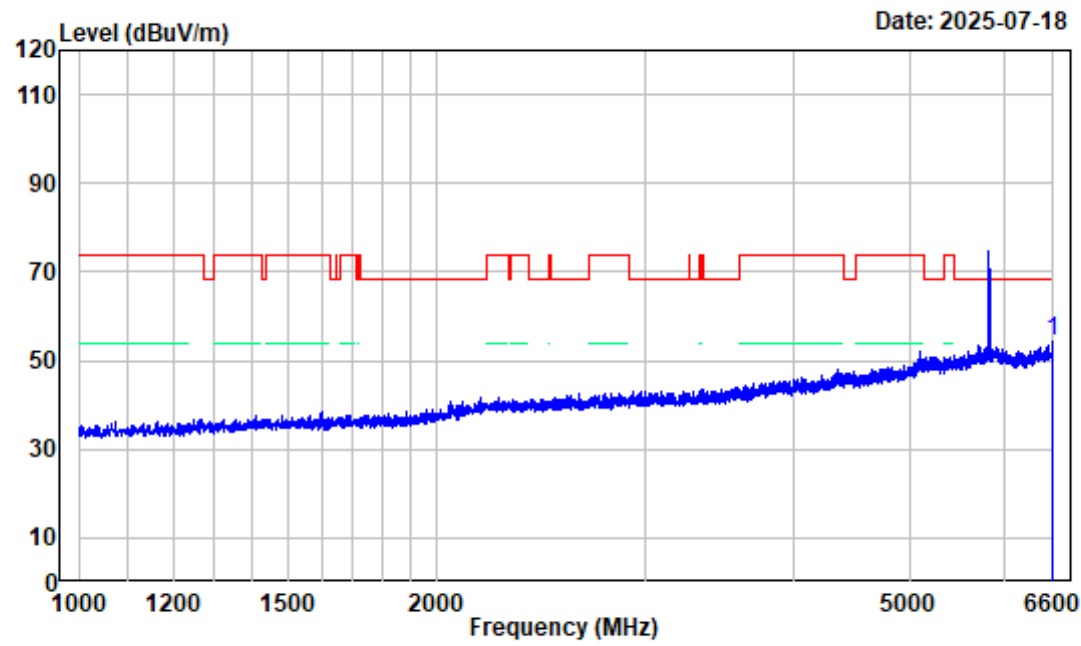

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6598.600	-3.55	57.73	54.18	68.20	-14.02 peak


802.11a High Channel 1GHz-6.6GHz_VERTICAL

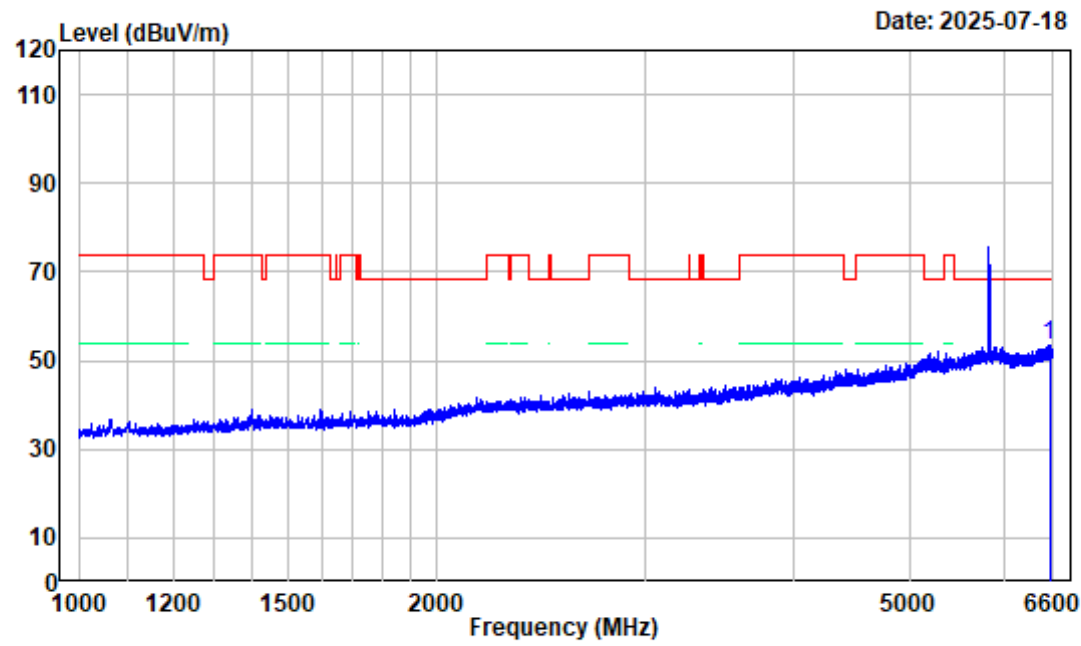

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6554.500	-3.70	57.02	53.32	68.20	-14.88 peak

802.11a High Channel 6.6GHz-18GHz_HORIZONTAL

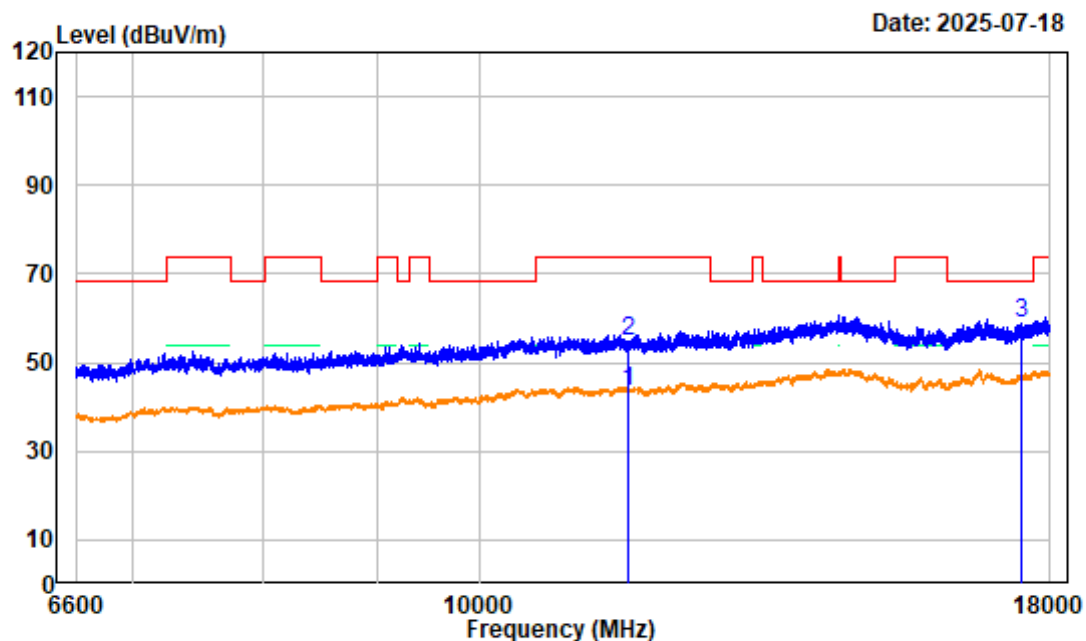

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11a High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	38.27	43.64	54.00	-10.36	Average
2	11650.000	5.37	49.32	54.69	74.00	-19.31	peak
3	17475.000	7.12	51.76	58.88	68.20	-9.32	peak

802.11a High Channel 6.6GHz-18GHz_VERTICAL

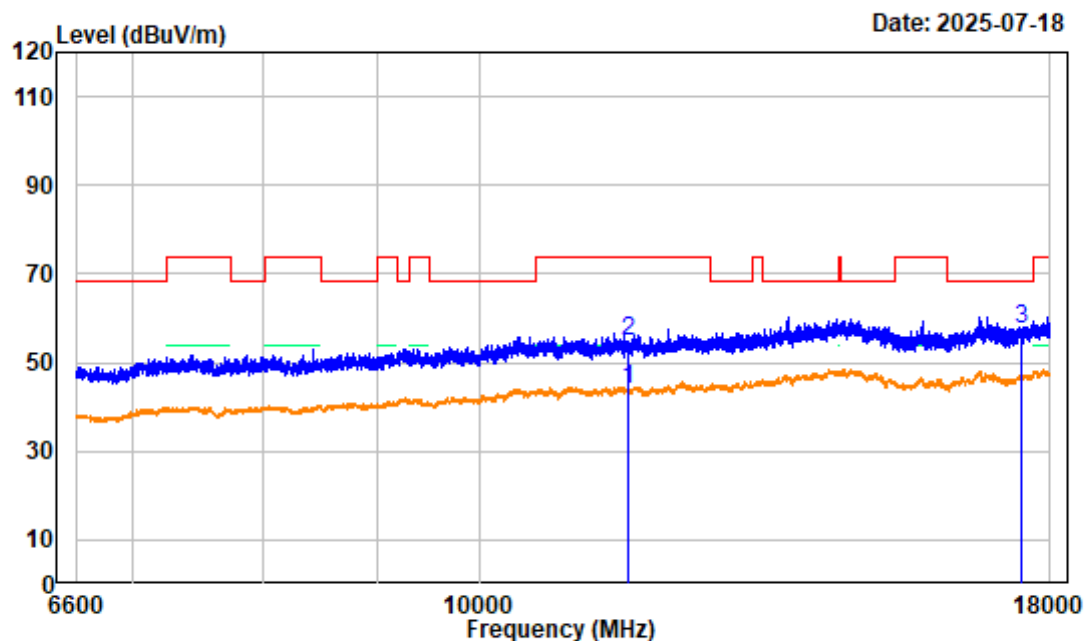

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11a High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	38.60	43.97	54.00	-10.03	Average
2	11650.000	5.37	49.58	54.95	74.00	-19.05	peak
3	17475.000	7.12	50.59	57.71	68.20	-10.49	peak


802.11a High Channel 18GHz-26.5GHz_HORIZONTAL

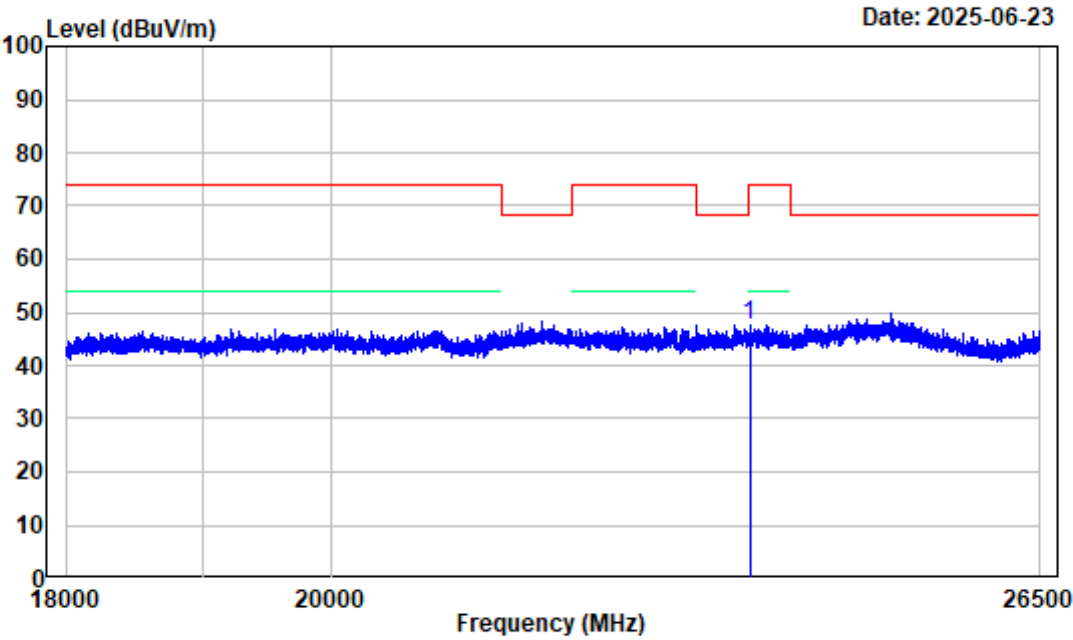

Site : chamber
Condition : 3m HORIZONTAL
Job No. : 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11a High Channel 5825MHz 18-26.5GHz
SA Setting: Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 23614.250	1.24	46.21	47.45	74.00	-26.55	Peak


802.11a High Channel 18GHz-26.5GHz_VERTICAL

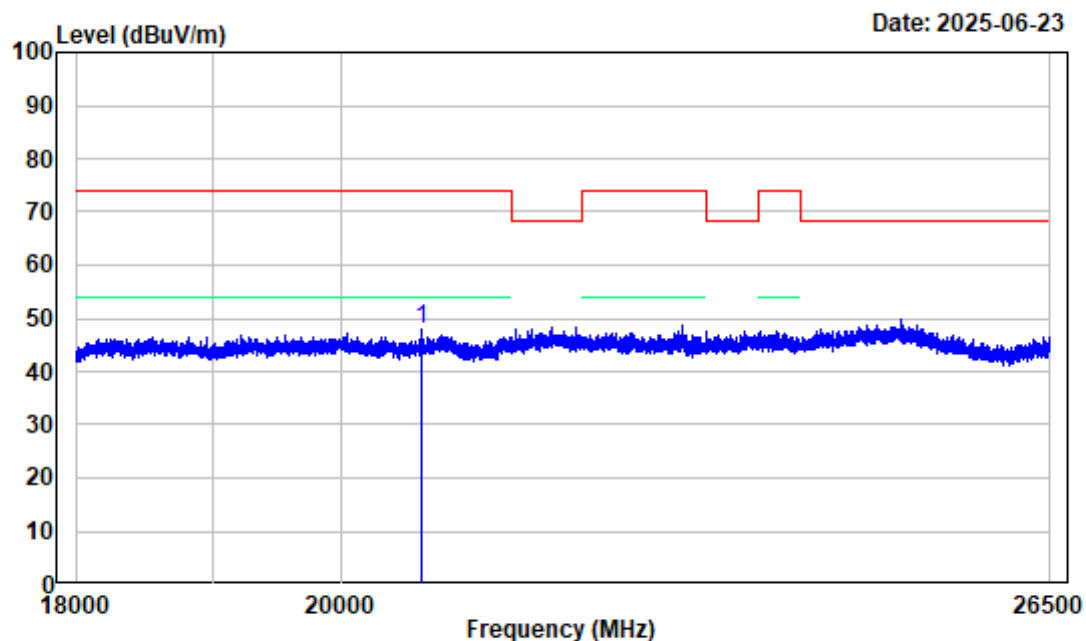

Site : chamber
 Condition : 3m VERTICAL
 Job No. : 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz 18-26.5GHz
 SA Setting: Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	20640.310	-6.40	54.26	47.86	74.00	-26.14	Peak

802.11a High Channel 26.5GHz-40GHz_HORIZONTAL

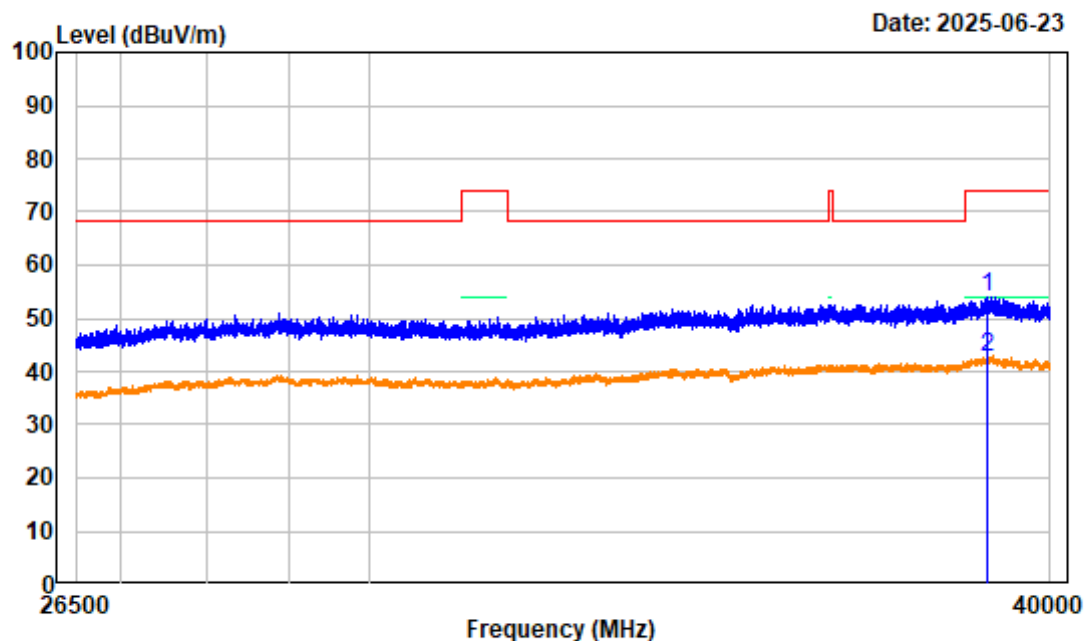

Site : chamber

Condition : 3m HORIZONTAL

Job No. : 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11a High Channel 5825MHz 26.5-40GHz

SA Setting: Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	38957.130	3.66	50.43	54.09	74.00	-19.91	Peak
2	38957.130	3.66	39.06	42.72	54.00	-11.28	Average

802.11a High Channel 26.5GHz-40GHz_VERTICAL

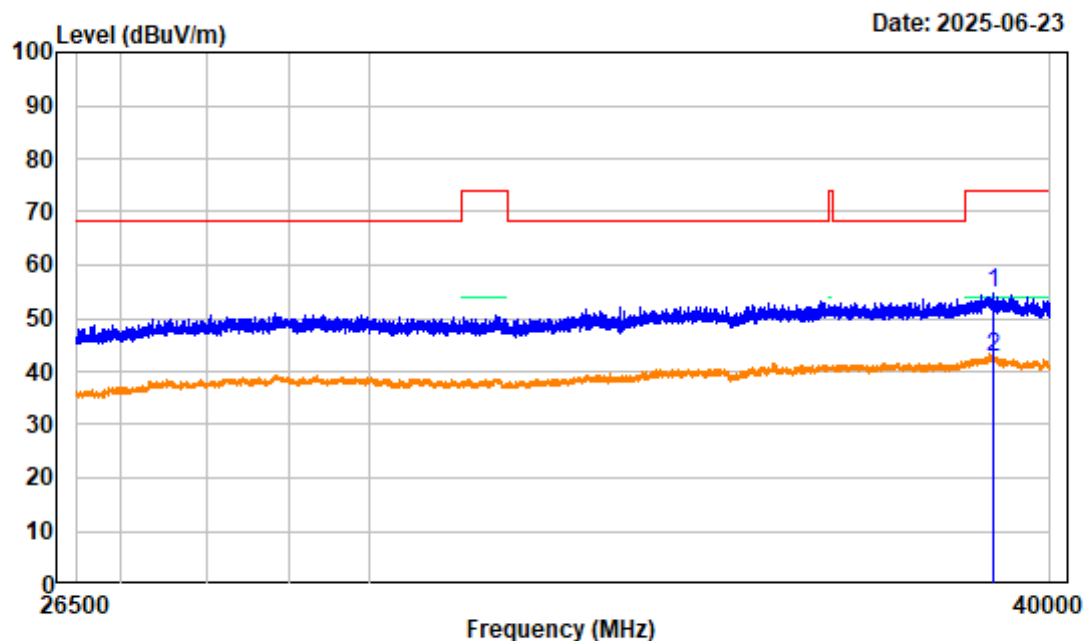

Site : chamber

Condition : 3m VERTICAL

Job No. : 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11a High Channel 5825MHz 26.5-40GHz

SA Setting: Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39044.880	2.99	51.79	54.78	74.00	-19.22	Peak
2 39044.880	2.99	39.58	42.57	54.00	-11.43	Average


802.11a High Channel Bandedge_HORIZONTAL

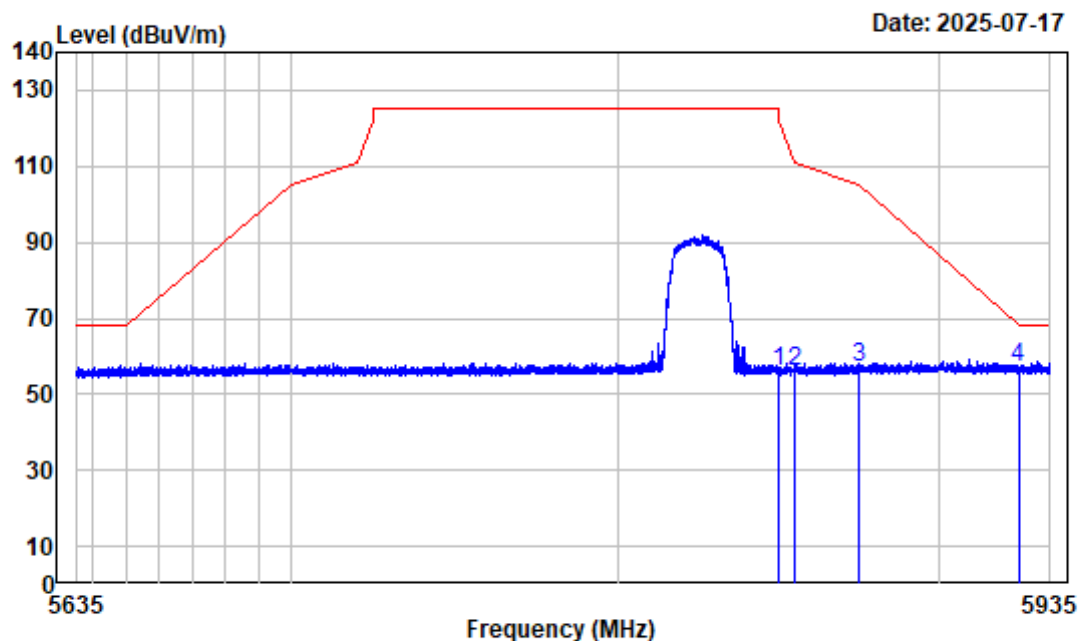

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.37	55.84	122.20	-66.36	peak
2	5855.000	-4.48	60.73	56.25	110.80	-54.55	peak
3	5875.000	-4.28	61.36	57.08	105.20	-48.12	peak
4	5925.000	-4.43	61.45	57.02	68.20	-11.18	peak


802.11a High Channel Bandedge_VERTICAL

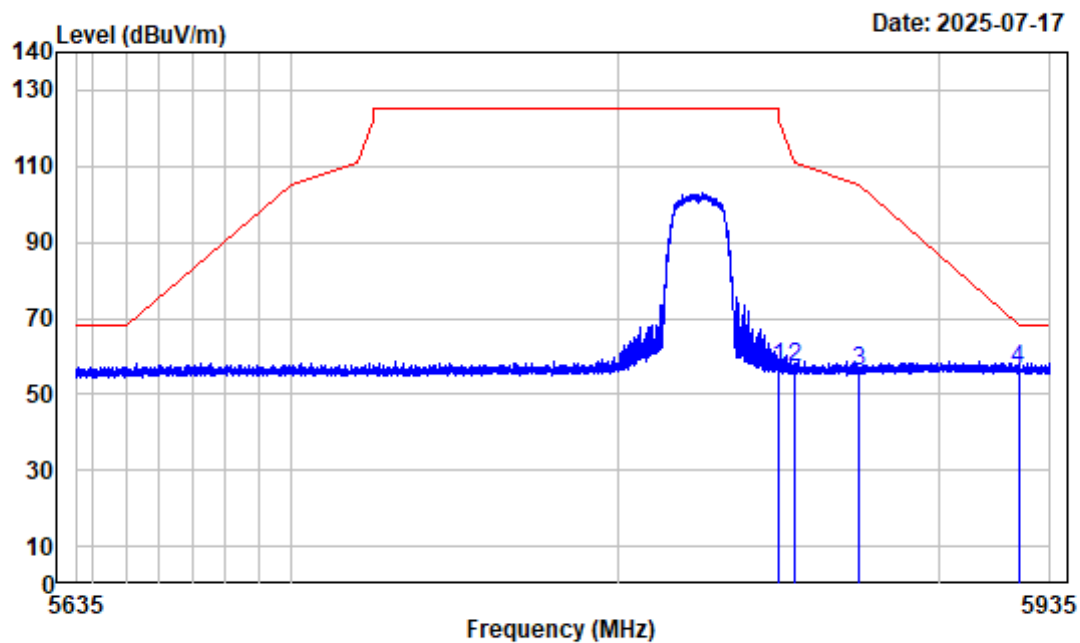

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11a High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.47	56.94	122.20	-65.26	peak
2	5855.000	-4.48	61.30	56.82	110.80	-53.98	peak
3	5875.000	-4.28	60.06	55.78	105.20	-49.42	peak
4	5925.000	-4.43	61.20	56.77	68.20	-11.43	peak


802.11ac20 Low Channel 1GHz-6.6GHz_HORIZONTAL

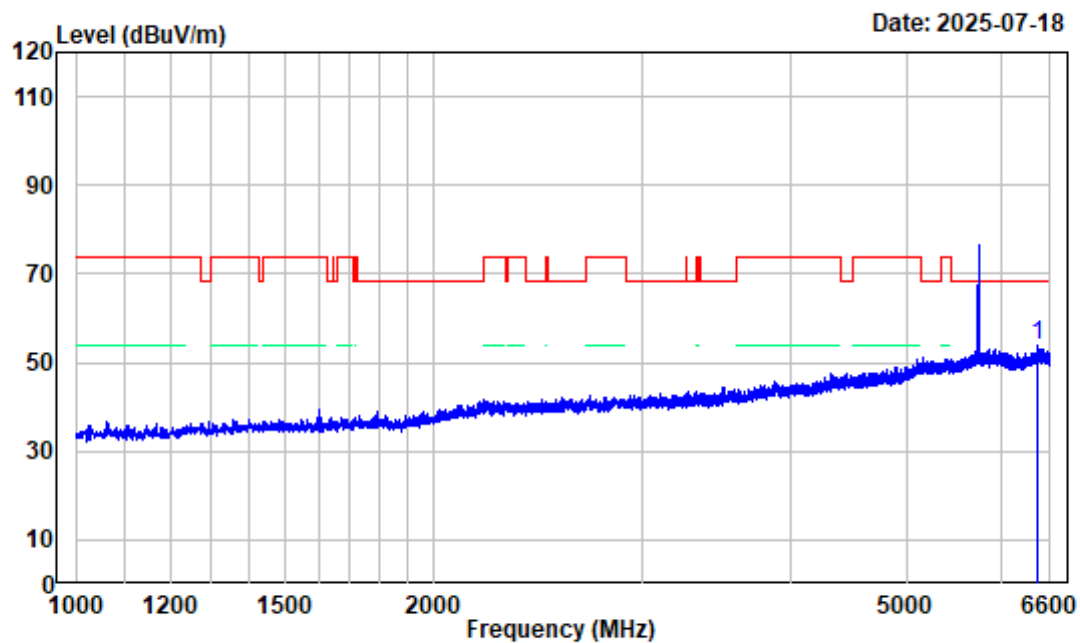

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6445.300	-3.62	57.57	53.95	68.20	-14.25	peak


802.11ac20 Low Channel 1GHz-6.6GHz_VERTICAL

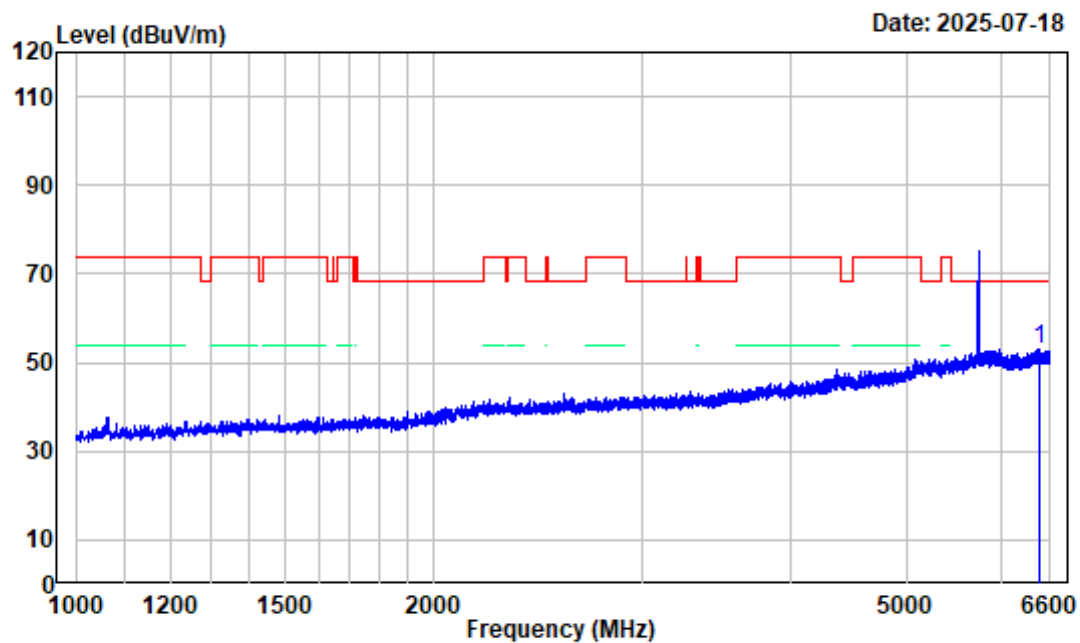

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6456.500	-3.64	56.74	53.10	68.20	-15.10	peak


802.11ac20 Low Channel 6.6GHz-18GHz_HORIZONTAL

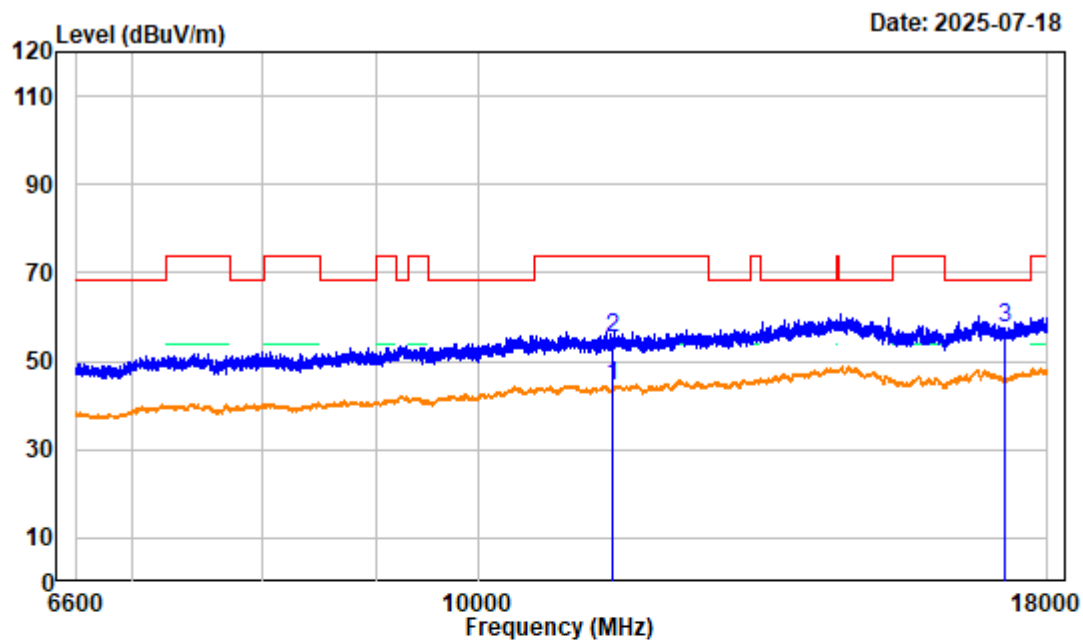

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	38.07	44.17	54.00	-9.83	Average
2	11490.000	6.10	49.10	55.20	74.00	-18.80	Peak
3	17235.000	6.76	50.74	57.50	68.20	-10.70	peak

802.11ac20 Low Channel 6.6GHz-18GHz_VERTICAL

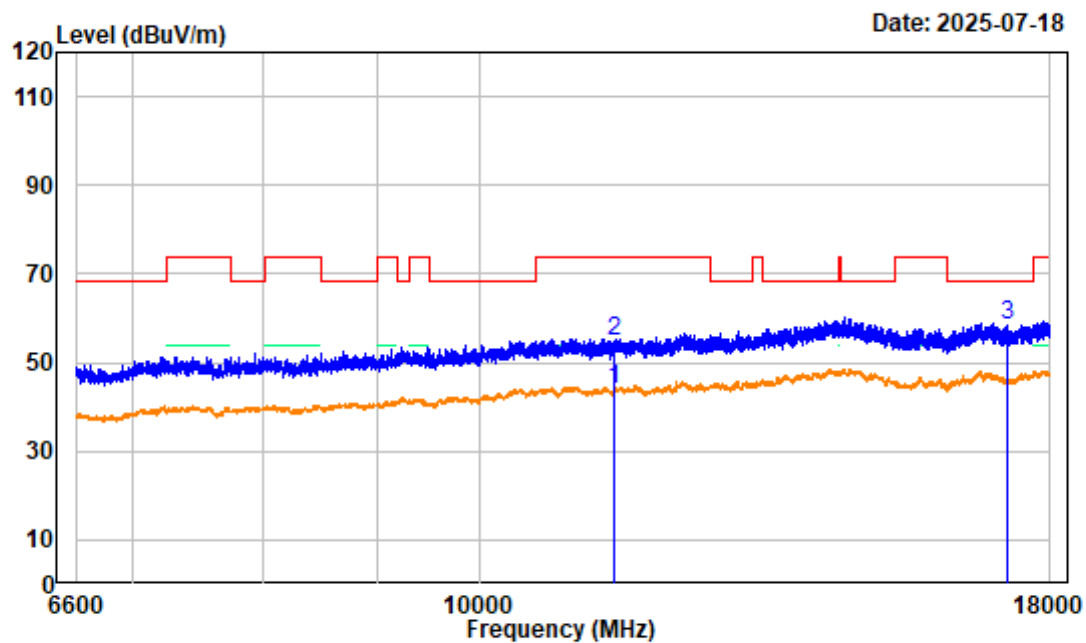

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac20 Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.10	37.75	43.85	54.00	-10.15	Average
2	11490.000	6.10	48.78	54.88	74.00	-19.12	peak
3	17235.000	6.76	51.44	58.20	68.20	-10.00	peak


802.11ac20 Low Channel Bandedge_HORIZONTAL

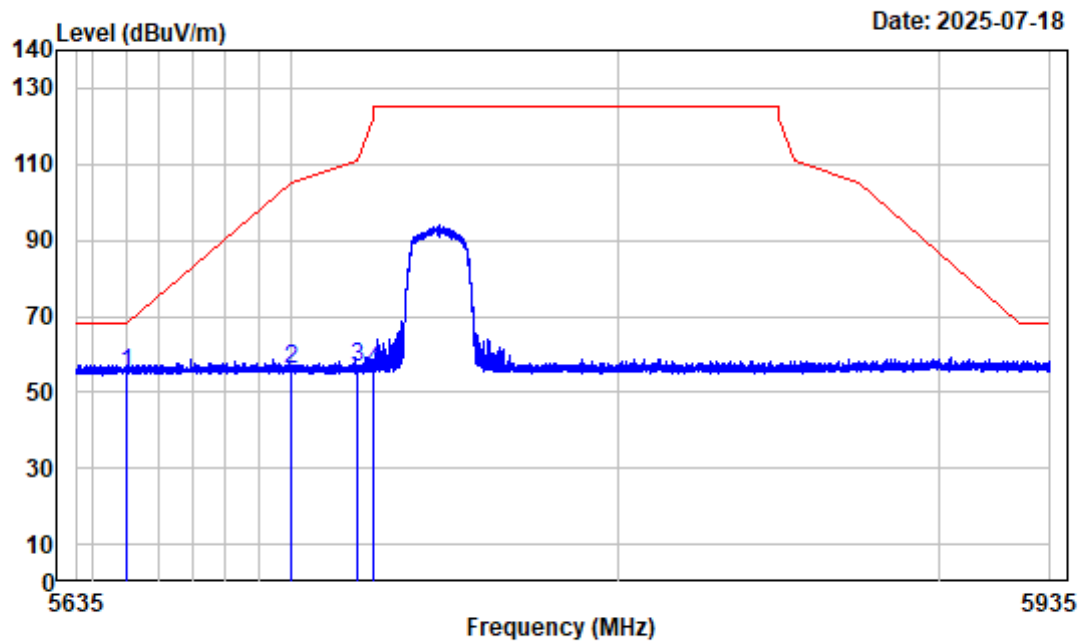

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.73	54.89	68.20	-13.31	peak
2	5700.000	-4.41	60.35	55.94	105.20	-49.26	peak
3	5720.000	-4.44	61.17	56.73	110.80	-54.07	peak
4	5725.000	-4.46	59.99	55.53	122.20	-66.67	peak


802.11ac20 Low Channel Bandedge_VERTICAL

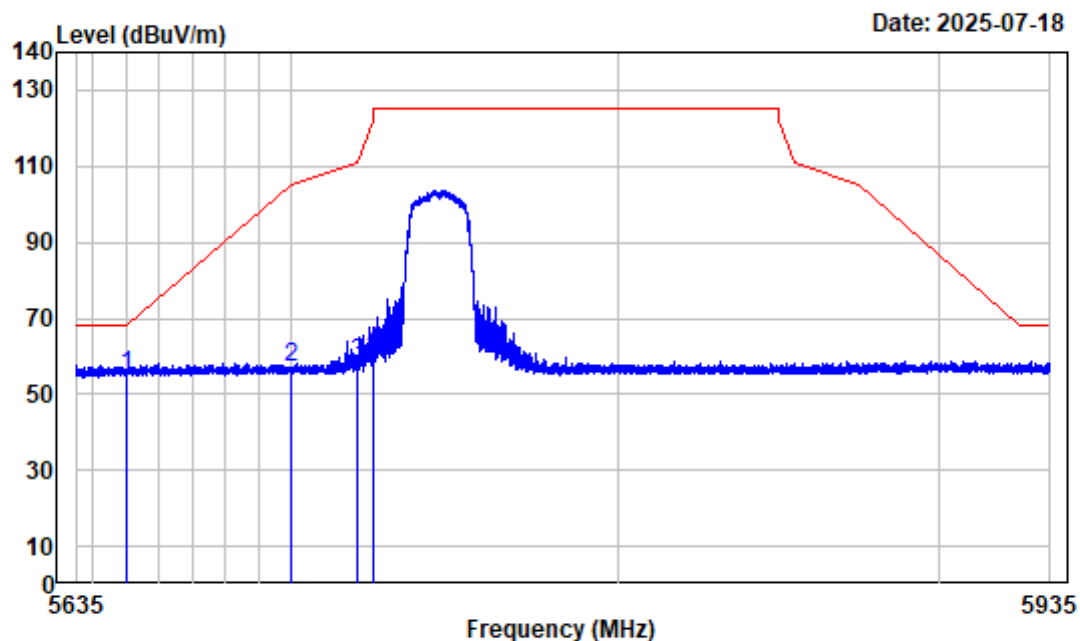

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Low Channel 5745MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.94	55.10	68.20	-13.10	peak
2	5700.000	-4.41	61.36	56.95	105.20	-48.25	peak
3	5720.000	-4.44	62.74	58.30	110.80	-52.50	peak
4	5725.000	-4.46	65.71	61.25	122.20	-60.95	peak


802.11ac20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

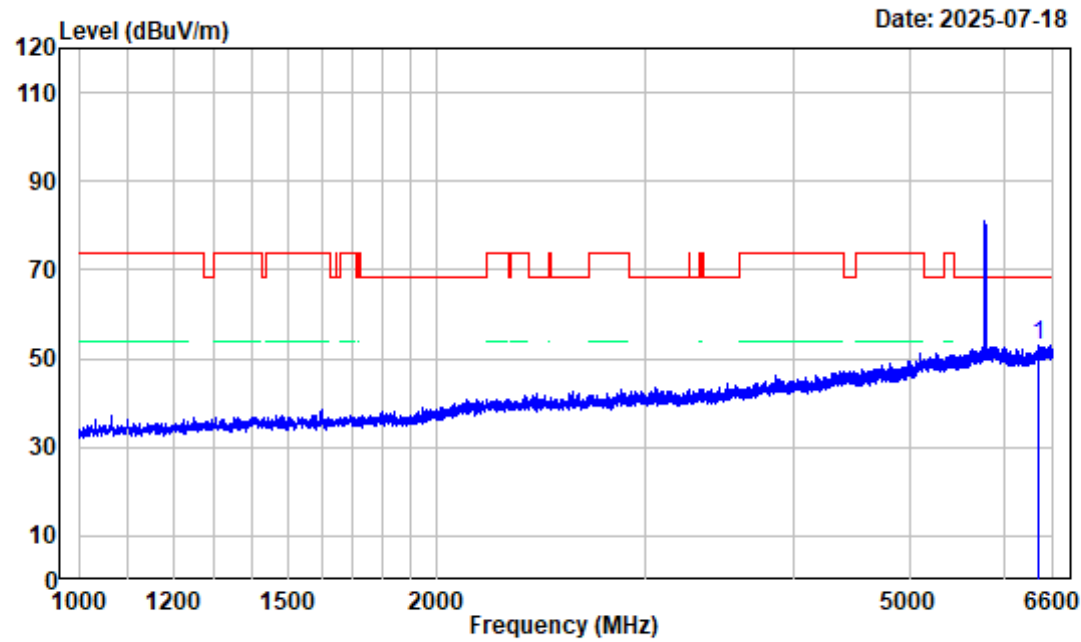

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6424.300	-3.64	56.63	52.99	68.20	-15.21 peak


802.11ac20 Middle Channel 1GHz-6.6GHz_VERTICAL

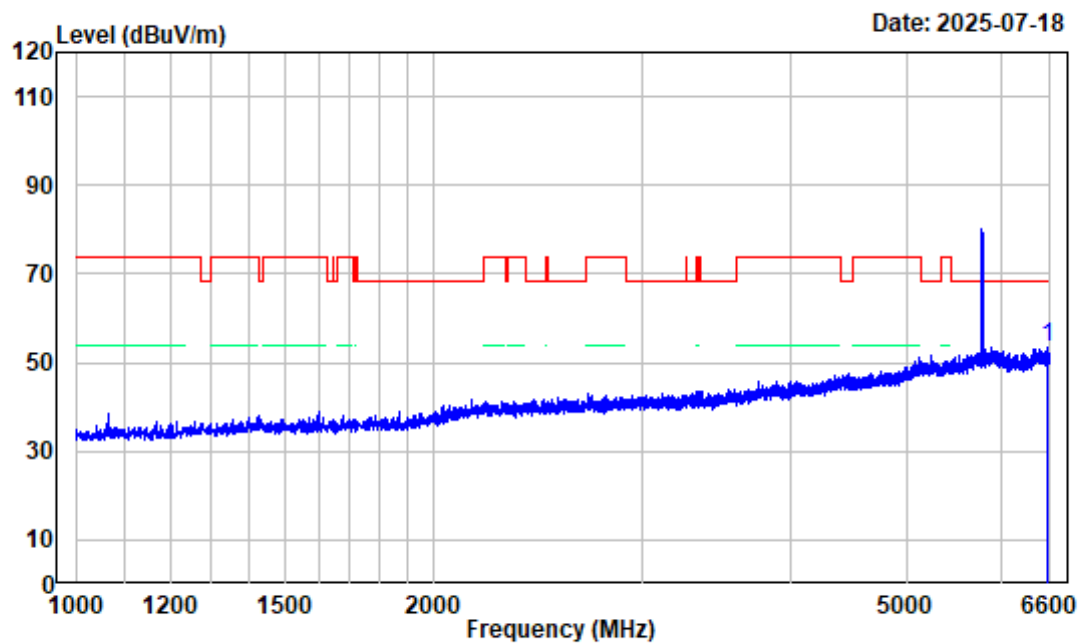

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5785MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6568.500	-3.65	57.12	53.47	68.20	-14.73	peak


802.11ac20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

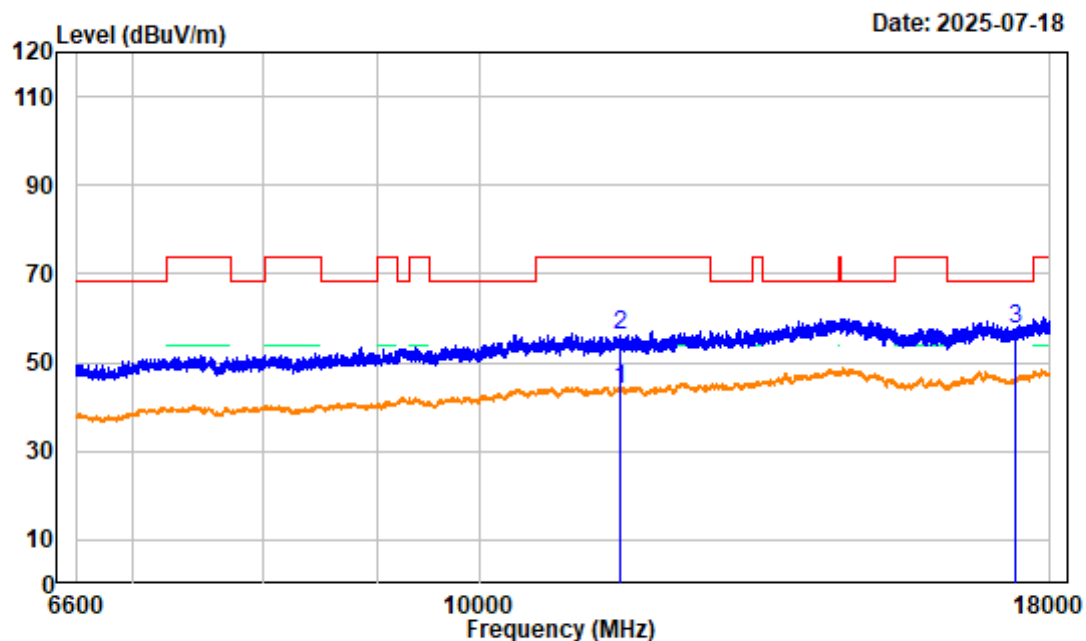

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.10	44.03	54.00	-9.97	Average
2	11570.000	5.93	50.13	56.06	74.00	-17.94	peak
3	17355.000	6.58	50.81	57.39	68.20	-10.81	peak


802.11ac20 Middle Channel 6.6GHz-18GHz_VERTICAL

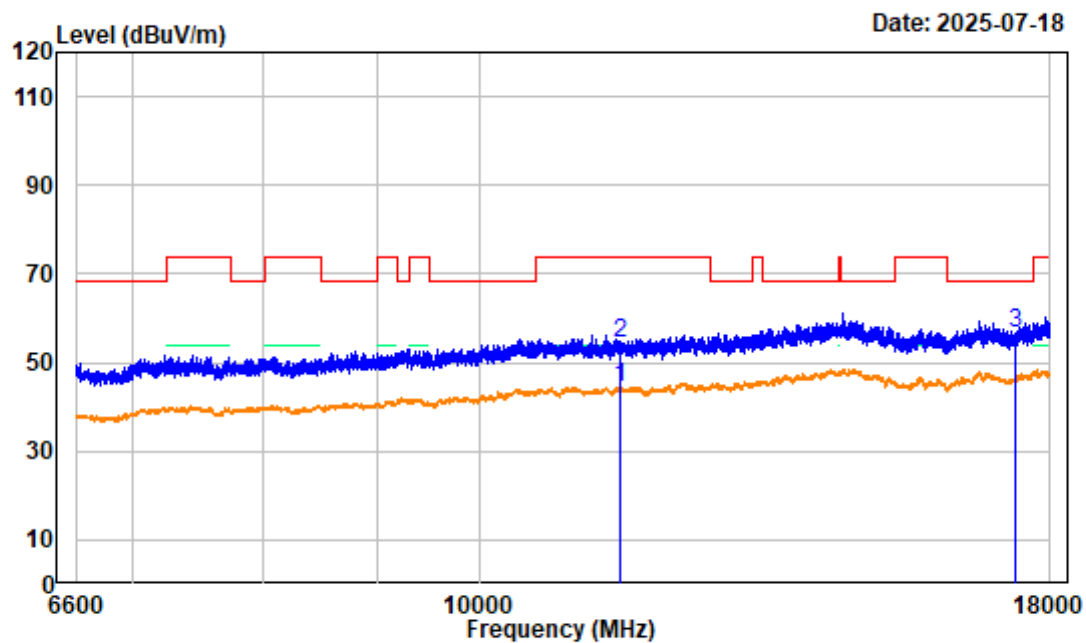

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 Middle Channel 5785MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	5.93	38.36	44.29	54.00	-9.71	Average
2	11570.000	5.93	48.32	54.25	74.00	-19.75	peak
3	17355.000	6.58	50.04	56.62	68.20	-11.58	peak


802.11ac20 High Channel 1GHz-6.6GHz_HORIZONTAL

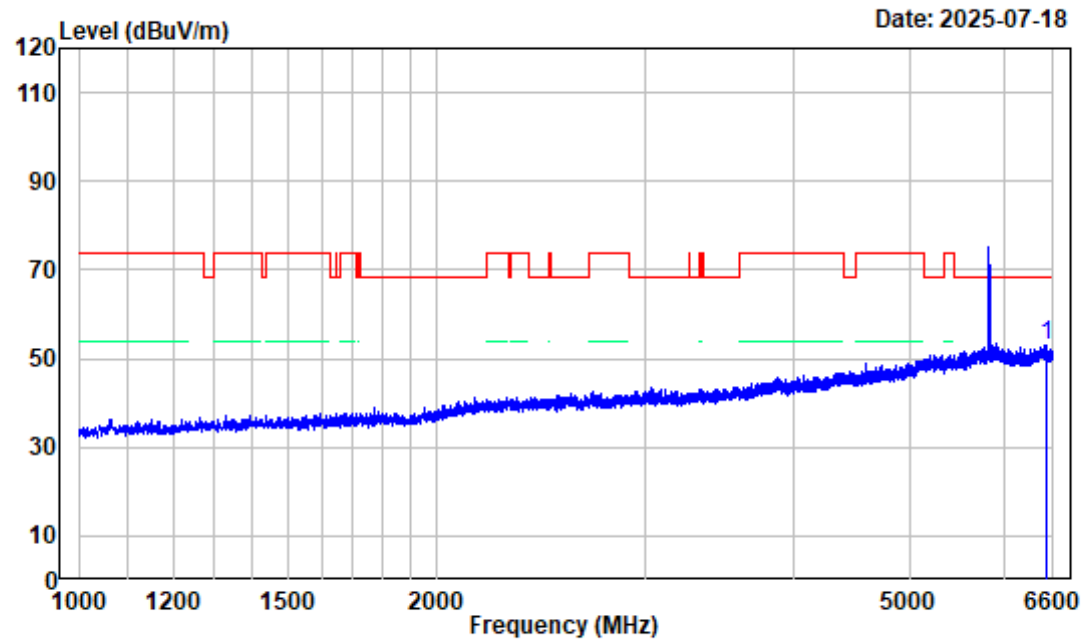

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6518.800	-3.78	56.89	53.11	68.20	-15.09	peak


802.11ac20 High Channel 1GHz-6.6GHz_VERTICAL

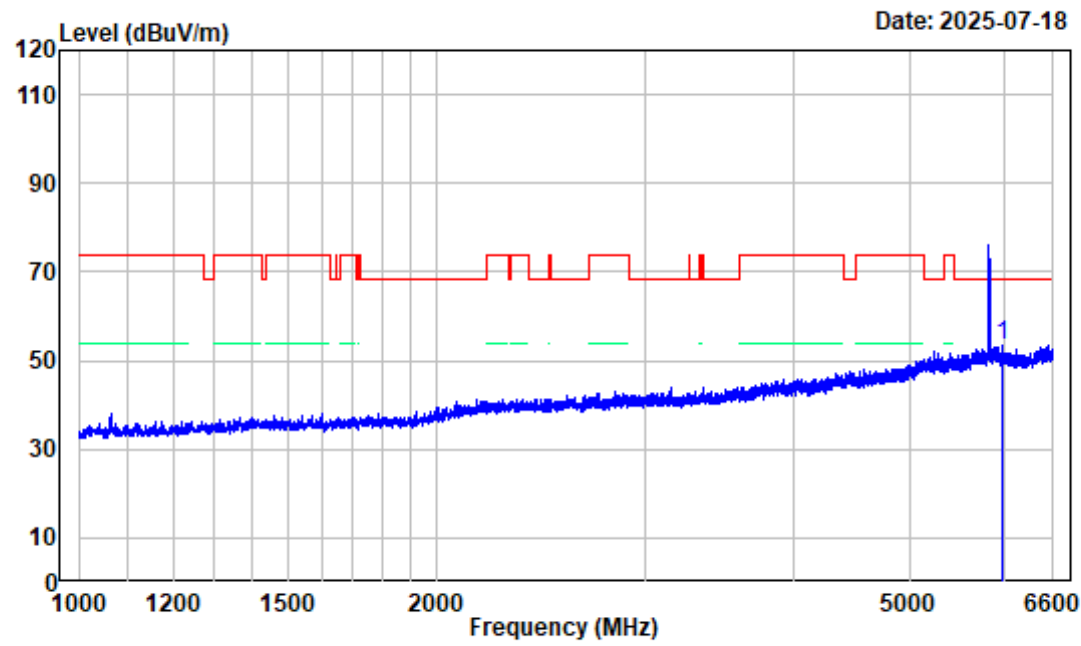

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5980.500	-4.87	58.15	53.28	68.20	-14.92	peak

802.11ac20 High Channel 6.6GHz-18GHz_HORIZONTAL

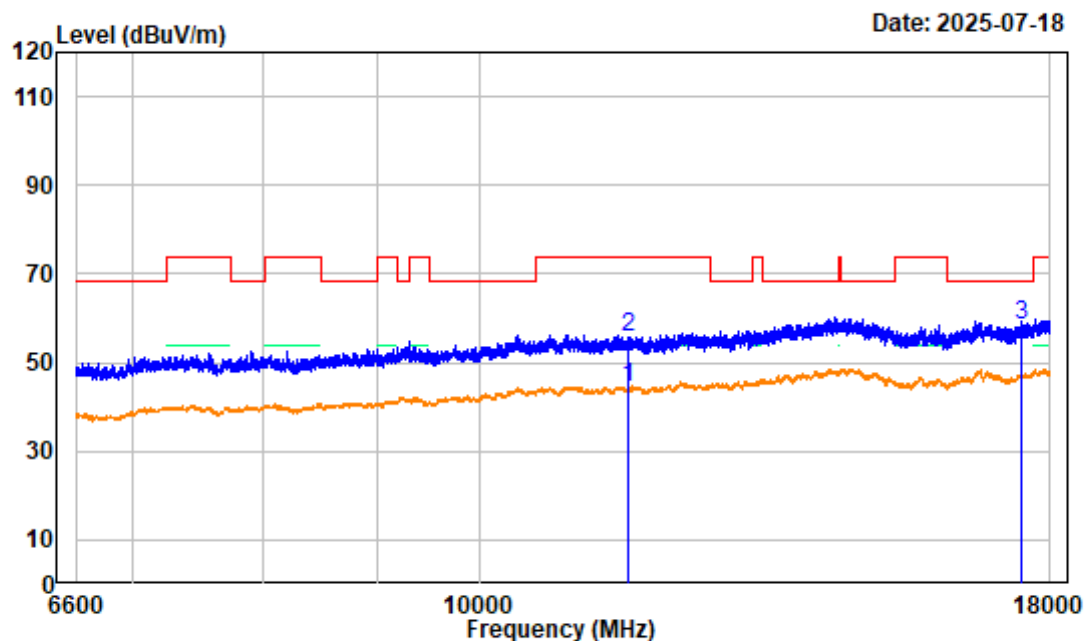

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac20 High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	39.16	44.53	54.00	-9.47	Average
2	11650.000	5.37	50.13	55.50	74.00	-18.50	peak
3	17475.000	7.12	51.39	58.51	68.20	-9.69	peak

802.11ac20 High Channel 6.6GHz-18GHz_VERTICAL

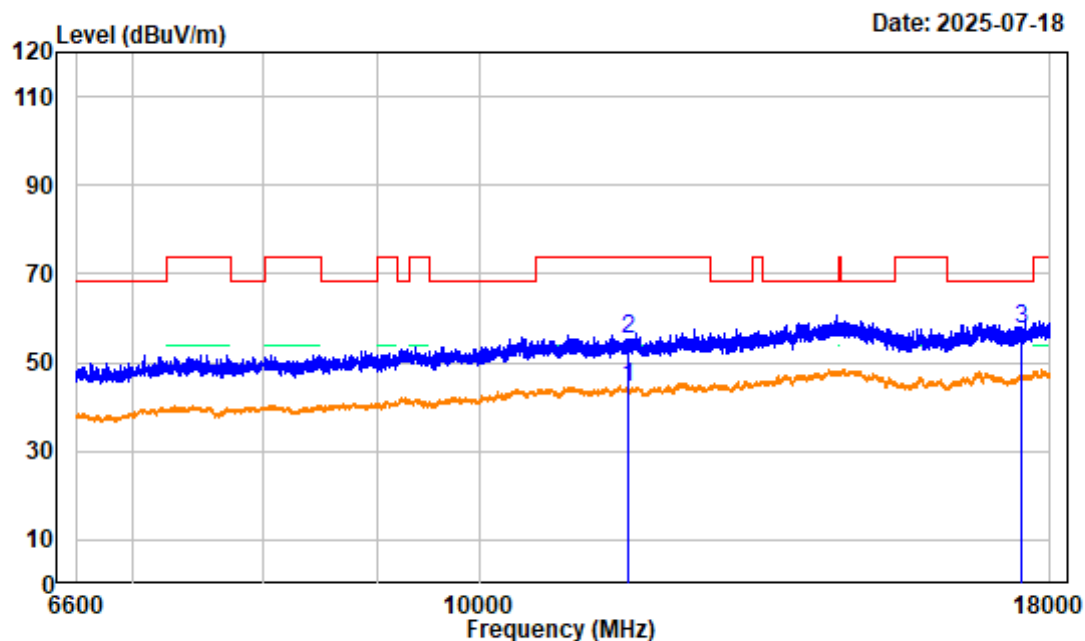

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac20 High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.37	38.87	44.24	54.00	-9.76	Average
2	11650.000	5.37	49.92	55.29	74.00	-18.71	peak
3	17475.000	7.12	50.30	57.42	68.20	-10.78	peak


802.11ac20 High Channel Bandedge_HORIZONTAL

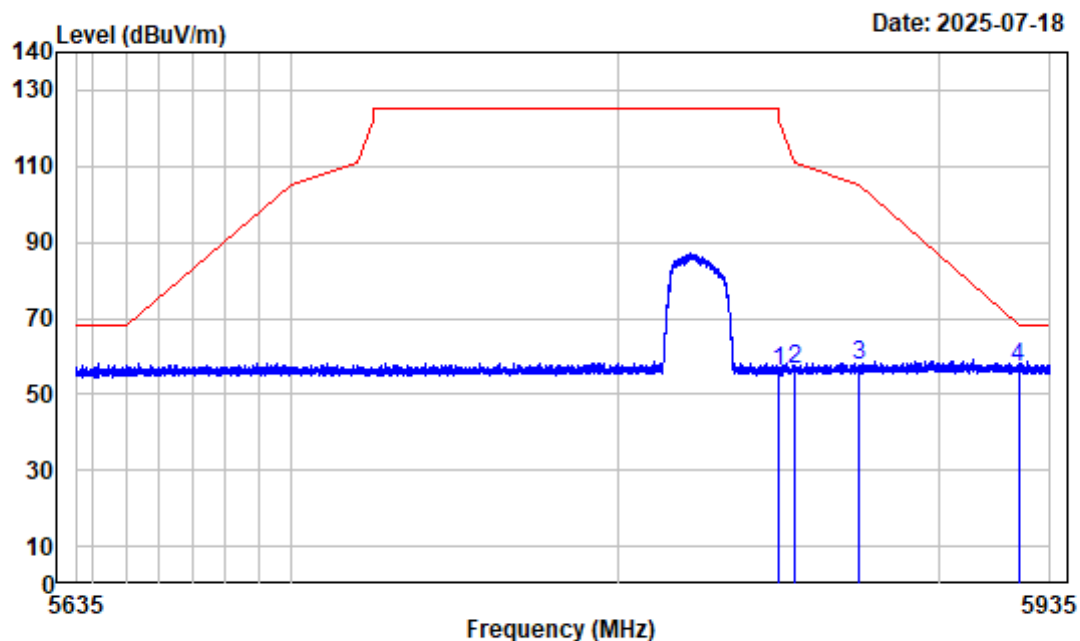

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.41	55.88	122.20	-66.32	peak
2	5855.000	-4.48	61.18	56.70	110.80	-54.10	peak
3	5875.000	-4.28	61.94	57.66	105.20	-47.54	peak
4	5925.000	-4.43	61.44	57.01	68.20	-11.19	peak


802.11ac20 High Channel Bandedge_VERTICAL

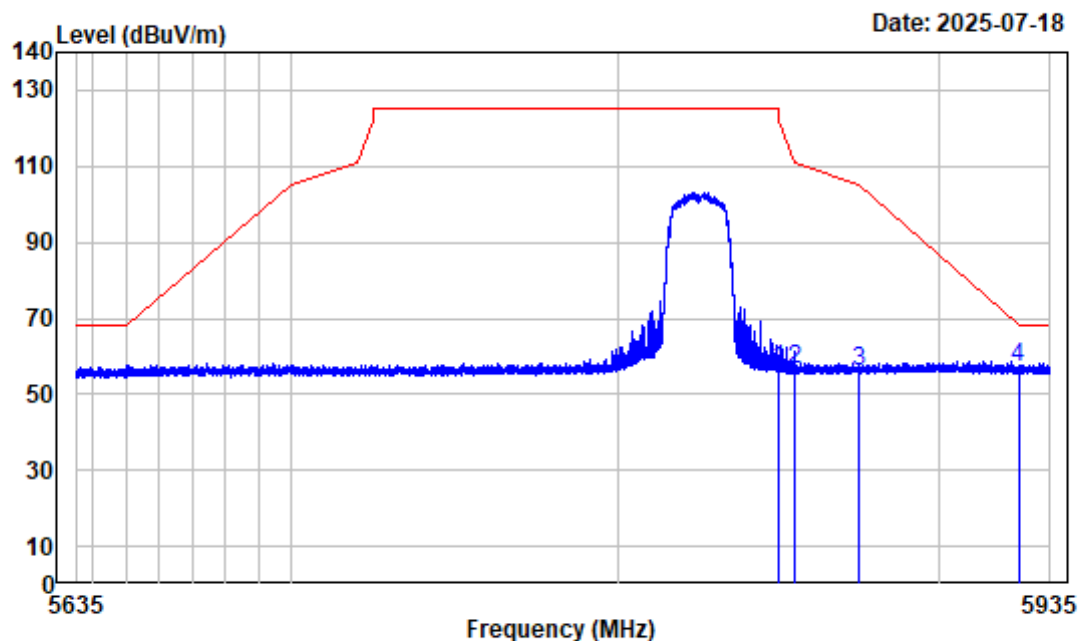

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac20 High Channel 5825MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.19	56.66	122.20	-65.54	peak
2	5855.000	-4.48	60.79	56.31	110.80	-54.49	peak
3	5875.000	-4.28	60.47	56.19	105.20	-49.01	peak
4	5925.000	-4.43	61.56	57.13	68.20	-11.07	peak


802.11ac40 Low Channel 1GHz-6.6GHz_HORIZONTAL

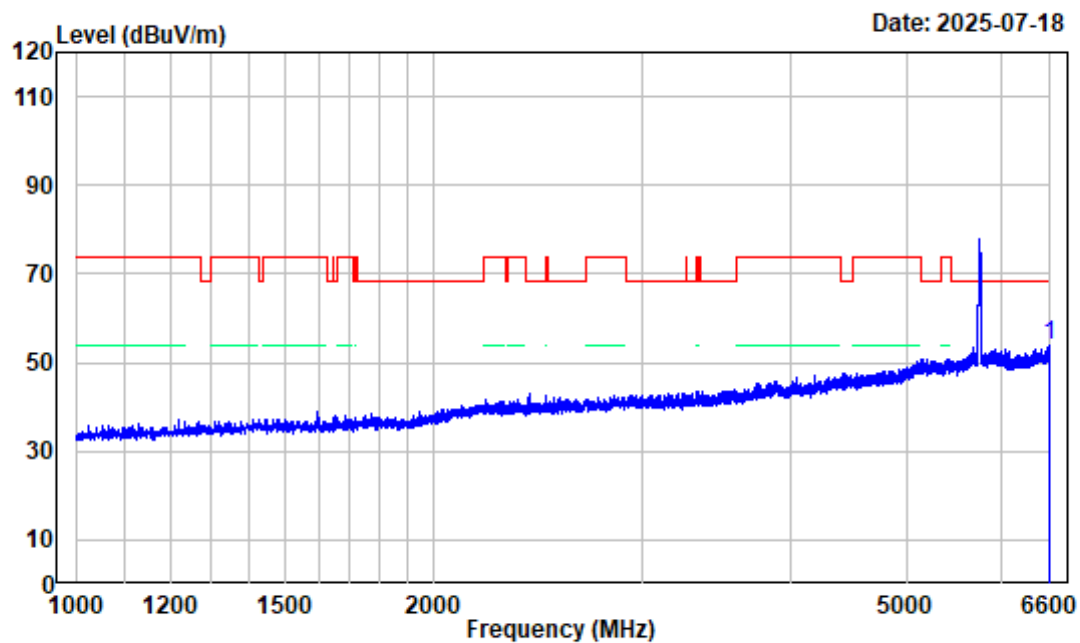

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq Factor	Read		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6593.700	-3.57	57.28	53.71	68.20	-14.49 peak


802.11ac40 Low Channel 1GHz-6.6GHz_VERTICAL

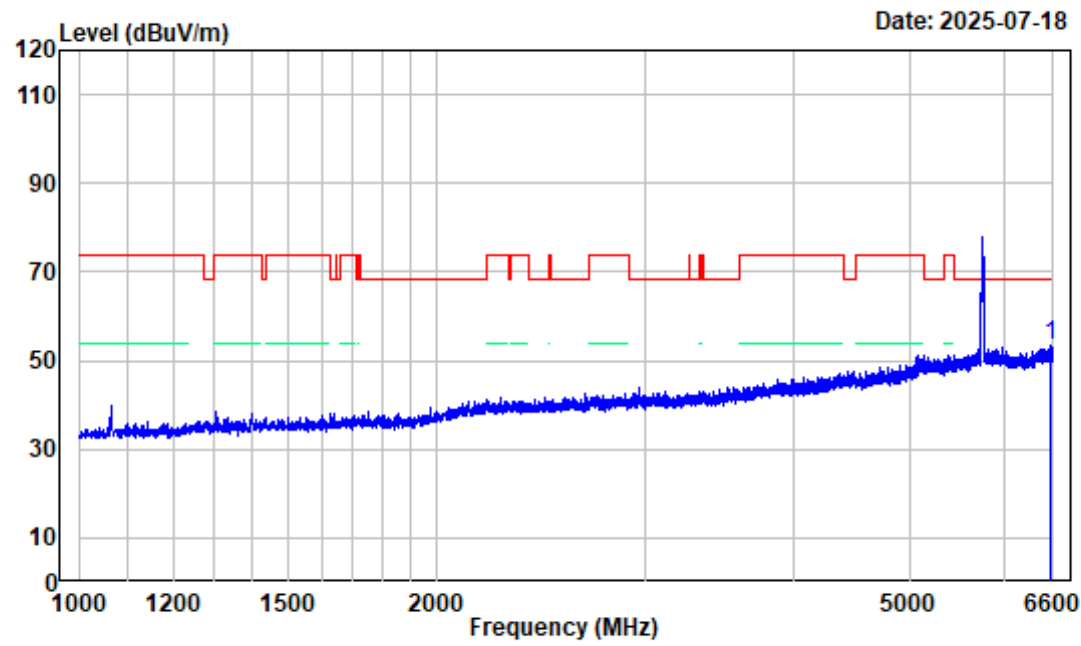

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6568.500	-3.65	56.98	53.33	68.20	-14.87 peak


802.11ac40 Low Channel 6.6GHz-18GHz_HORIZONTAL

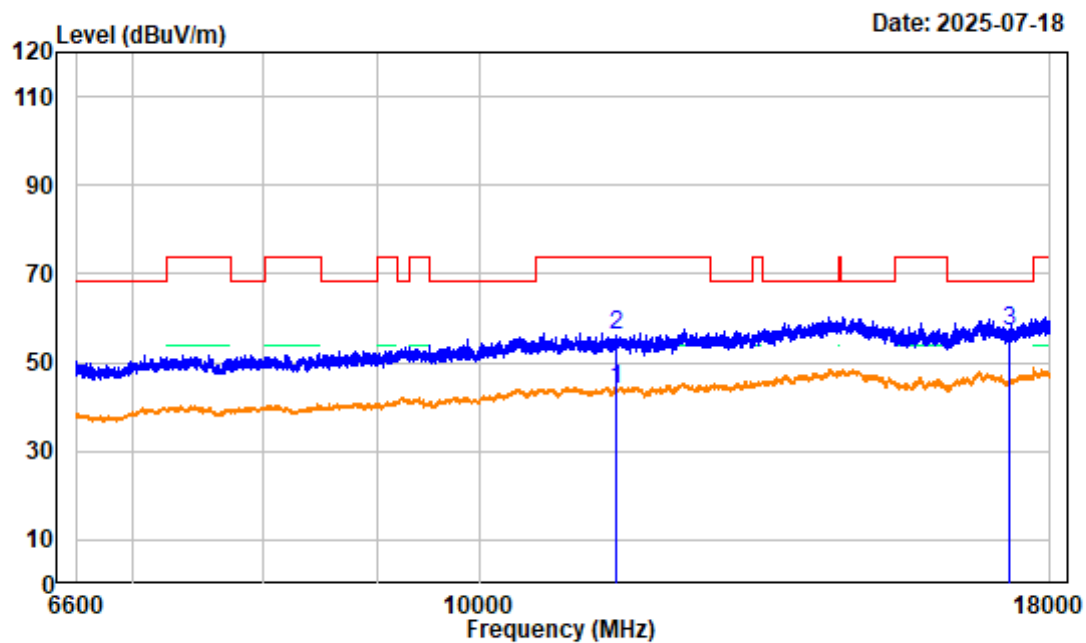

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	37.76	44.06	54.00	-9.94	Average
2	11510.000	6.30	49.74	56.04	74.00	-17.96	peak
3	17265.000	6.67	50.51	57.18	68.20	-11.02	peak

802.11ac40 Low Channel 6.6GHz-18GHz_VERTICAL

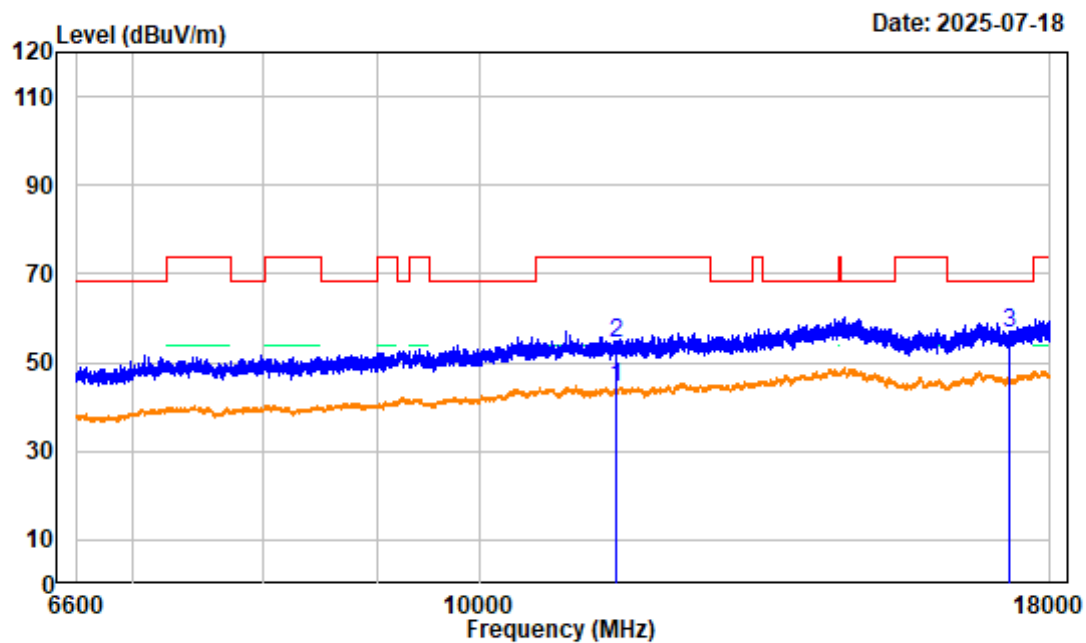

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac40 Low Channel 5755MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.30	37.91	44.21	54.00	-9.79	Average
2	11510.000	6.30	47.96	54.26	74.00	-19.74	peak
3	17265.000	6.67	50.00	56.67	68.20	-11.53	peak

802.11ac40 Low Channel Bandedge_HORIZONTAL

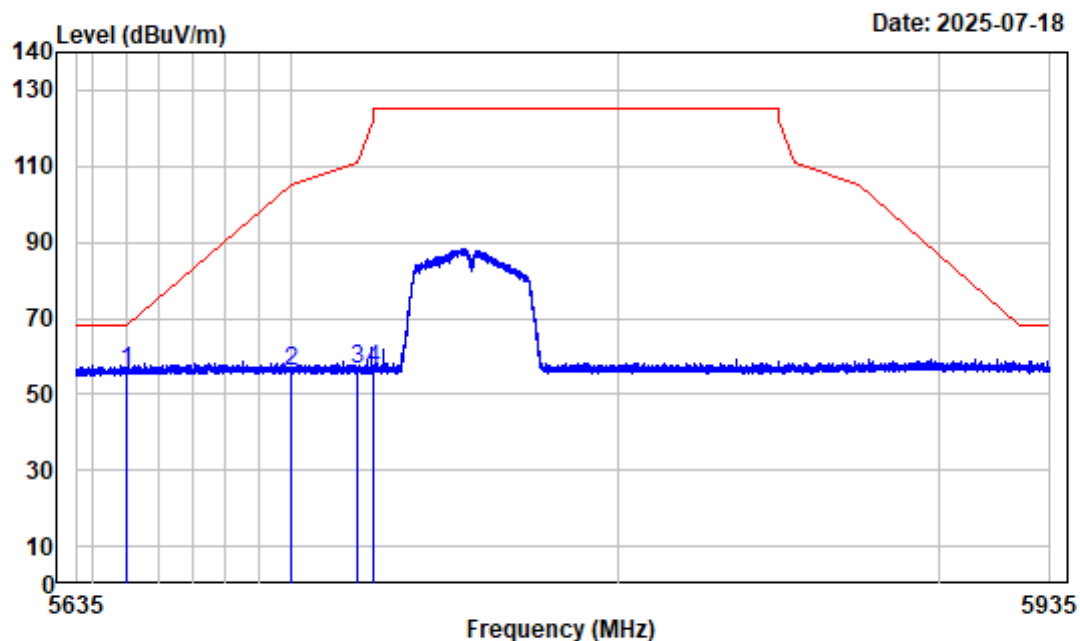

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac40 Low Channel 5755MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.10	56.26	68.20	-11.94	peak
2	5700.000	-4.41	60.67	56.26	105.20	-48.94	peak
3	5720.000	-4.44	61.05	56.61	110.80	-54.19	peak
4	5725.000	-4.46	60.74	56.28	122.20	-65.92	peak


802.11ac40 Low Channel Bandedge_VERTICAL

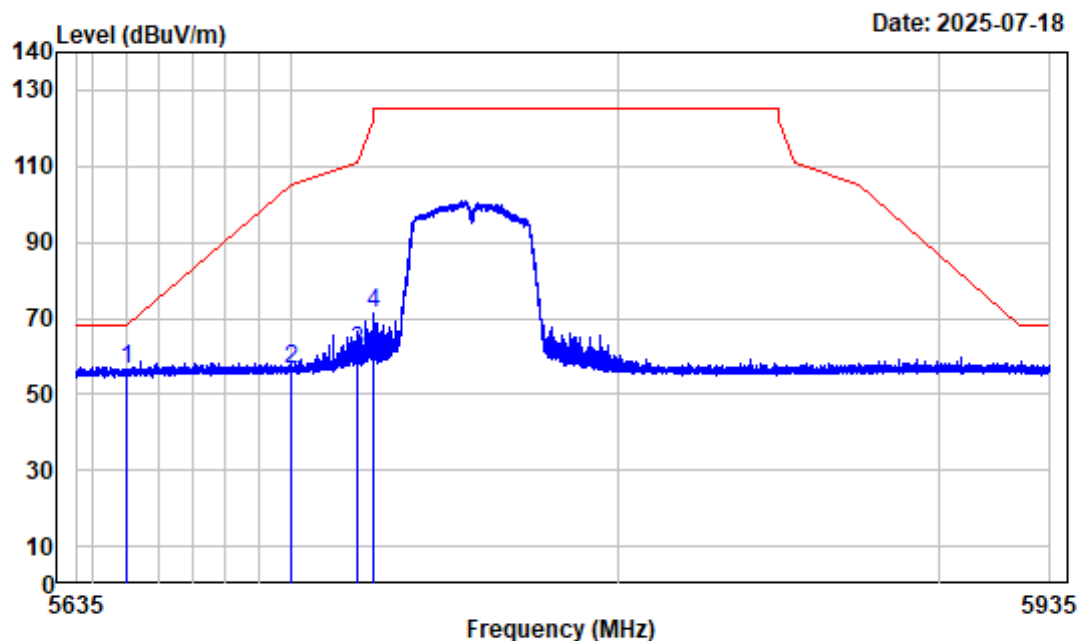

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 Low Channel 5755MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.27	56.43	68.20	-11.77	peak
2	5700.000	-4.41	60.70	56.29	105.20	-48.91	peak
3	5720.000	-4.44	65.72	61.28	110.80	-49.52	peak
4	5725.000	-4.46	75.82	71.36	122.20	-50.84	peak


802.11ac40 High Channel 1GHz-6.6GHz_HORIZONTAL

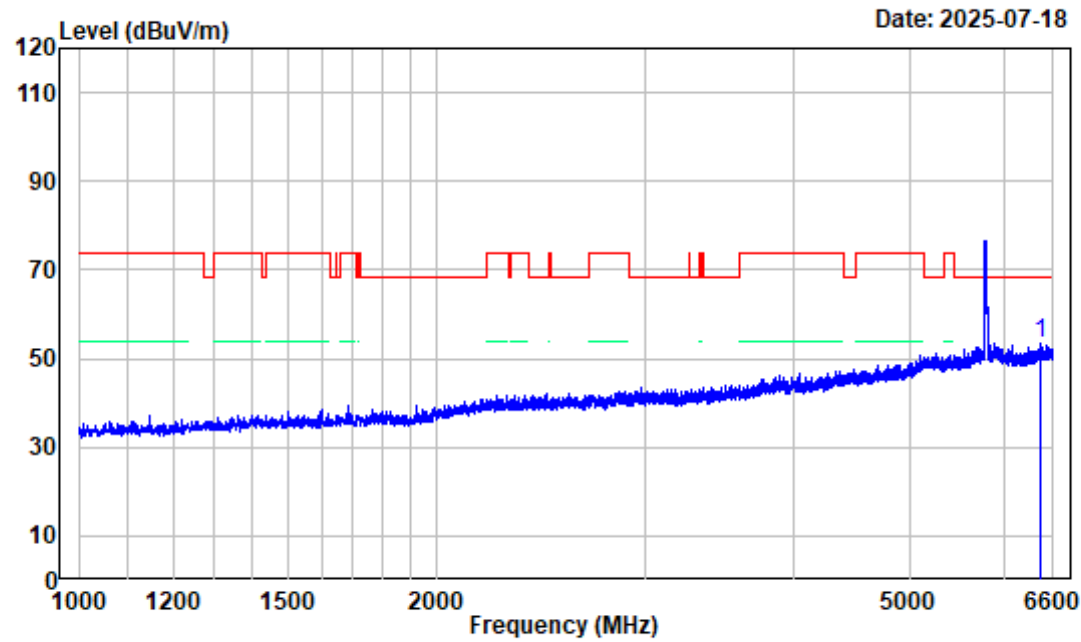

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6449.500	-3.61	56.84	53.23	68.20	-14.97 peak


802.11ac40 High Channel 1GHz-6.6GHz_VERTICAL

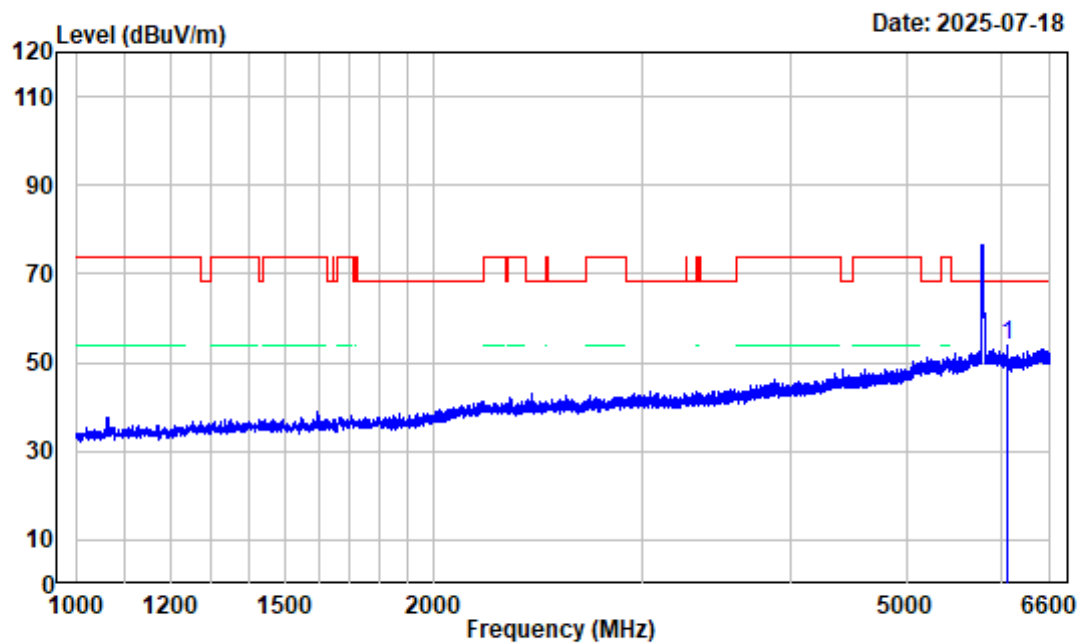

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6086.200	-4.96	58.65	53.69	68.20	-14.51	peak

802.11ac40 High Channel 6.6GHz-18GHz_HORIZONTAL

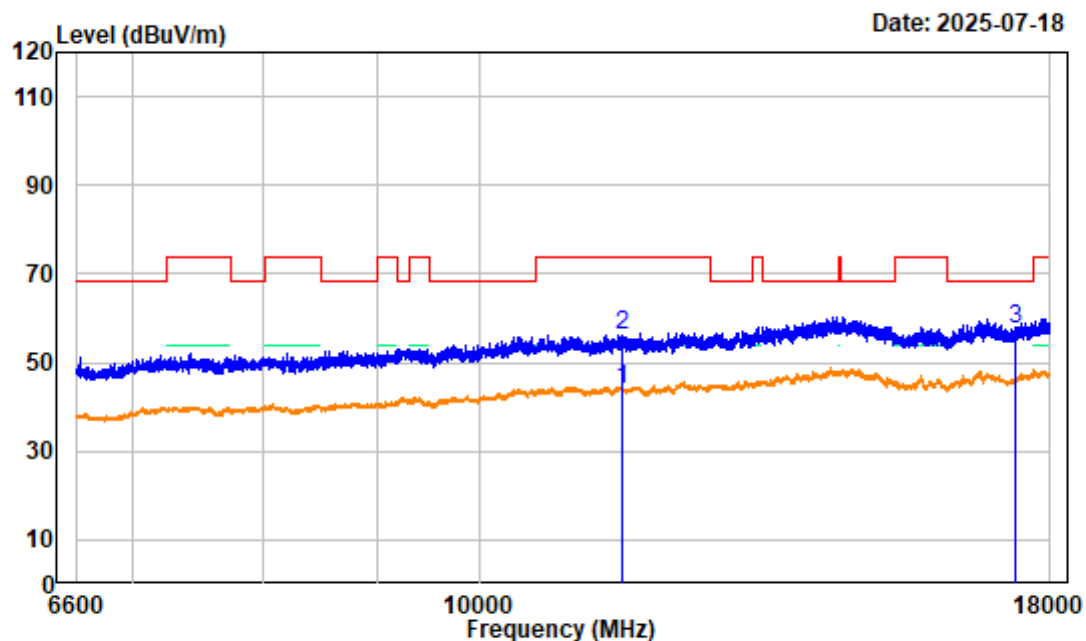

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac40 High Channel 5795MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	38.18	43.95	54.00	-10.05	Average
2	11590.000	5.77	50.16	55.93	74.00	-18.07	peak
3	17385.000	6.76	50.85	57.61	68.20	-10.59	peak


802.11ac40 High Channel 6.6GHz-18GHz_VERTICAL

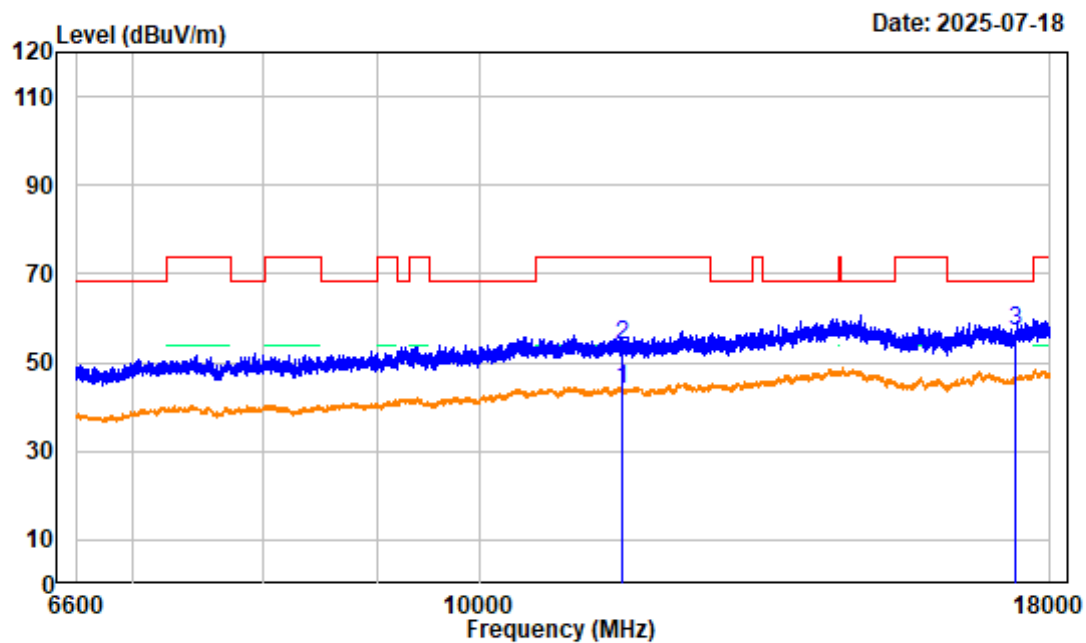

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	5.77	38.29	44.06	54.00	-9.94	Average
2 11590.000	5.77	48.32	54.09	74.00	-19.91	peak
3 17385.000	6.76	50.30	57.06	68.20	-11.14	peak


802.11ac40 High Channel Bandedge_HORIZONTAL

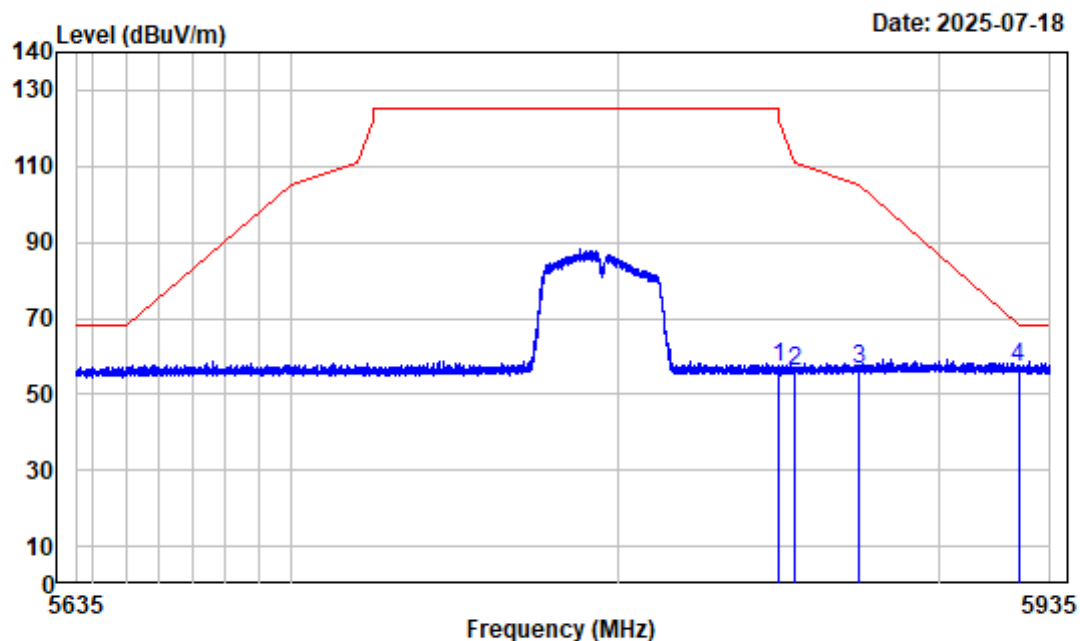

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac40 High Channel 5795MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.41	56.88	122.20	-65.32	peak
2	5855.000	-4.48	60.50	56.02	110.80	-54.78	peak
3	5875.000	-4.28	60.93	56.65	105.20	-48.55	peak
4	5925.000	-4.43	61.48	57.05	68.20	-11.15	peak

802.11ac40 High Channel Bandedge_VERTICAL

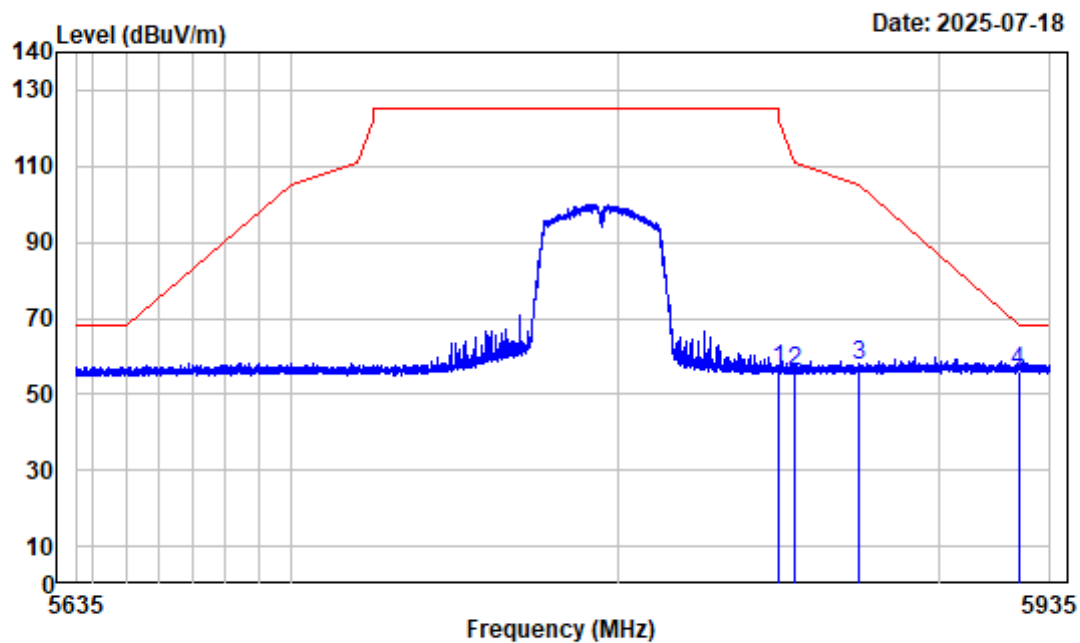

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac40 High Channel 5795MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	60.83	56.30	122.20	-65.90	peak
2	5855.000	-4.48	60.46	55.98	110.80	-54.82	peak
3	5875.000	-4.28	61.82	57.54	105.20	-47.66	peak
4	5925.000	-4.43	60.53	56.10	68.20	-12.10	peak

802.11ac80 Channel 1GHz-6.6GHz_HORIZONTAL

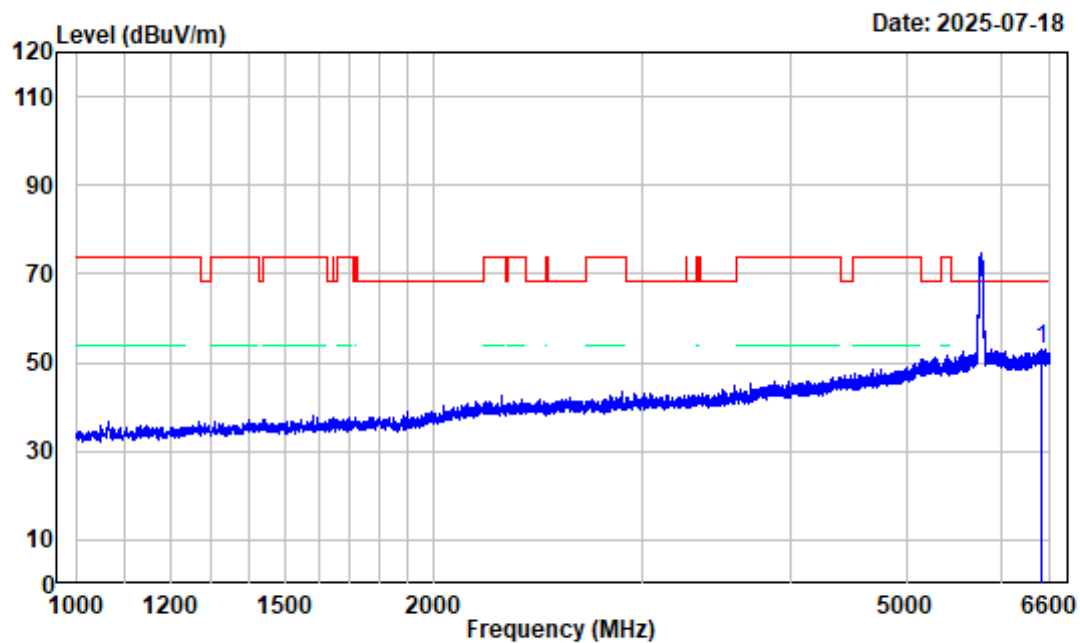

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac80 Channel 5775MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6485.900	-3.75	56.72	52.97	68.20	-15.23	peak


802.11ac80 Channel 1GHz-6.6GHz_VERTICAL

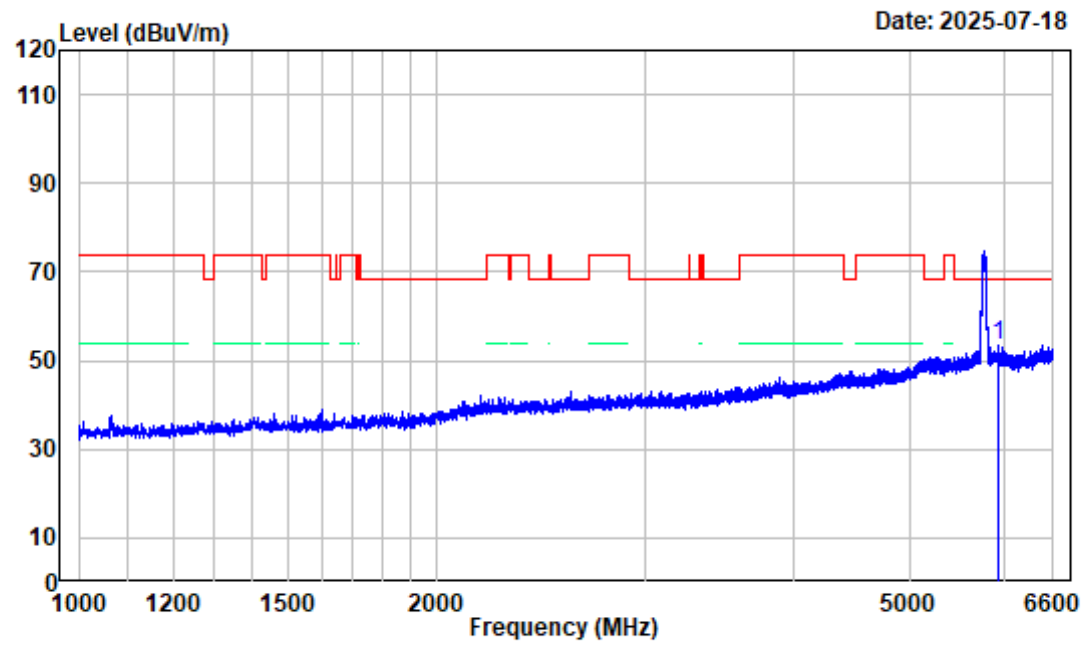

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504S23848E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11ac80 Channel 5775MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5944.800	-4.73	58.14	53.41	68.20	-14.79 peak


802.11ac80 Channel 6.6GHz-18GHz_HORIZONTAL

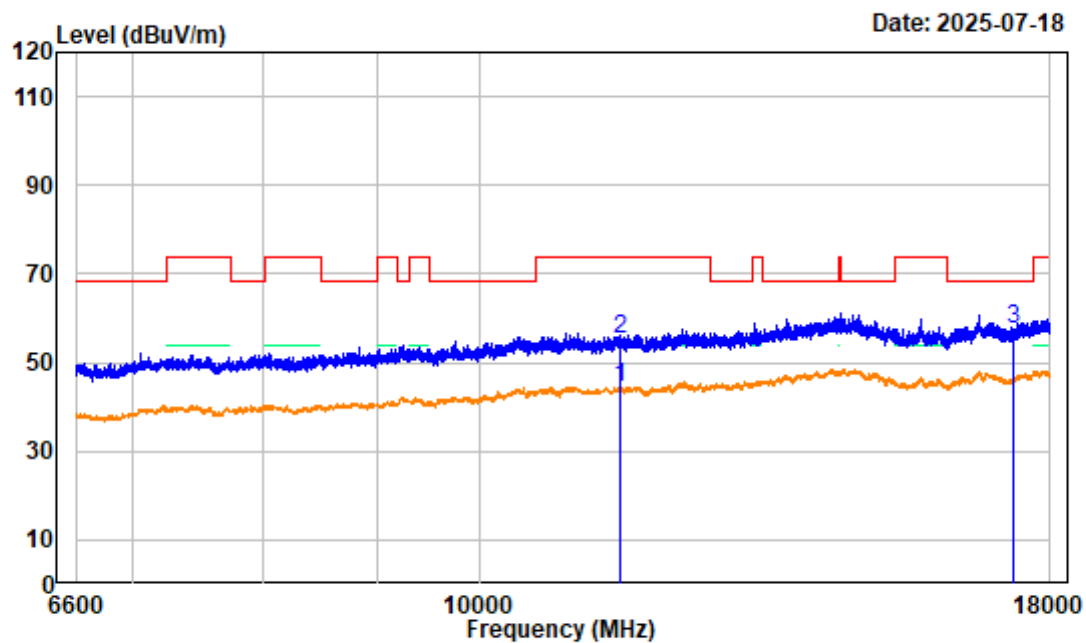

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Channel 5775MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.08	38.11	44.19	54.00	-9.81	average
2	11550.000	6.08	49.03	55.11	74.00	-18.89	peak
3	17325.000	6.54	51.07	57.61	68.20	-10.59	peak

802.11ac80 Channel 6.6GHz-18GHz_VERTICAL

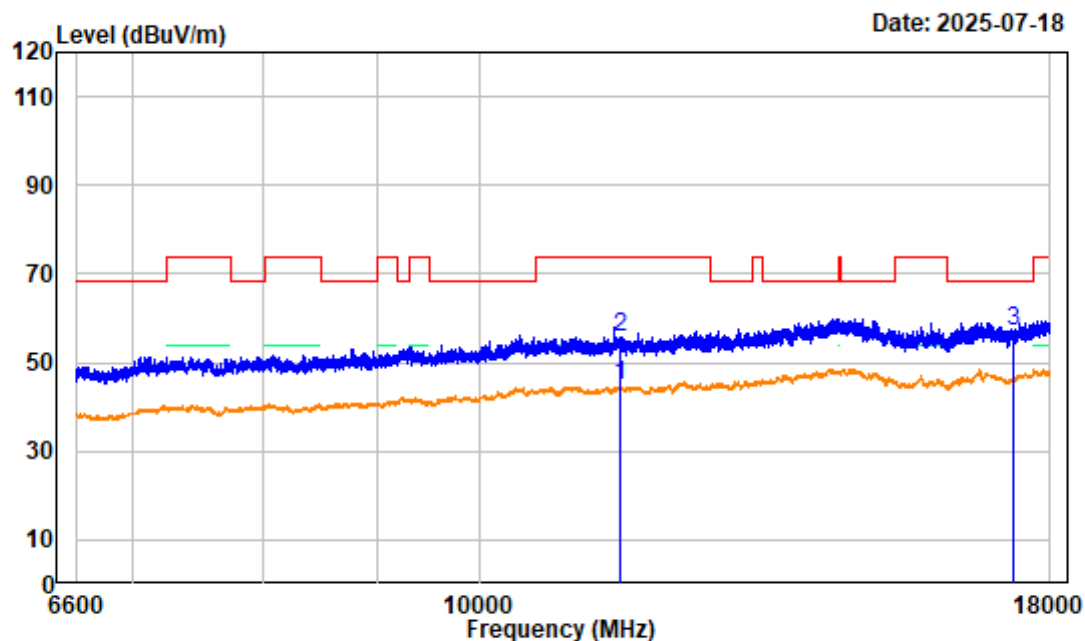

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504S23848E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11ac80 Channel 5775MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11550.000	6.08	38.54	44.62	54.00	-9.38	average
2	11550.000	6.08	49.56	55.64	74.00	-18.36	peak
3	17325.000	6.54	50.54	57.08	68.20	-11.12	peak


802.11ac80 Channel Bandedge_HORIZONTAL

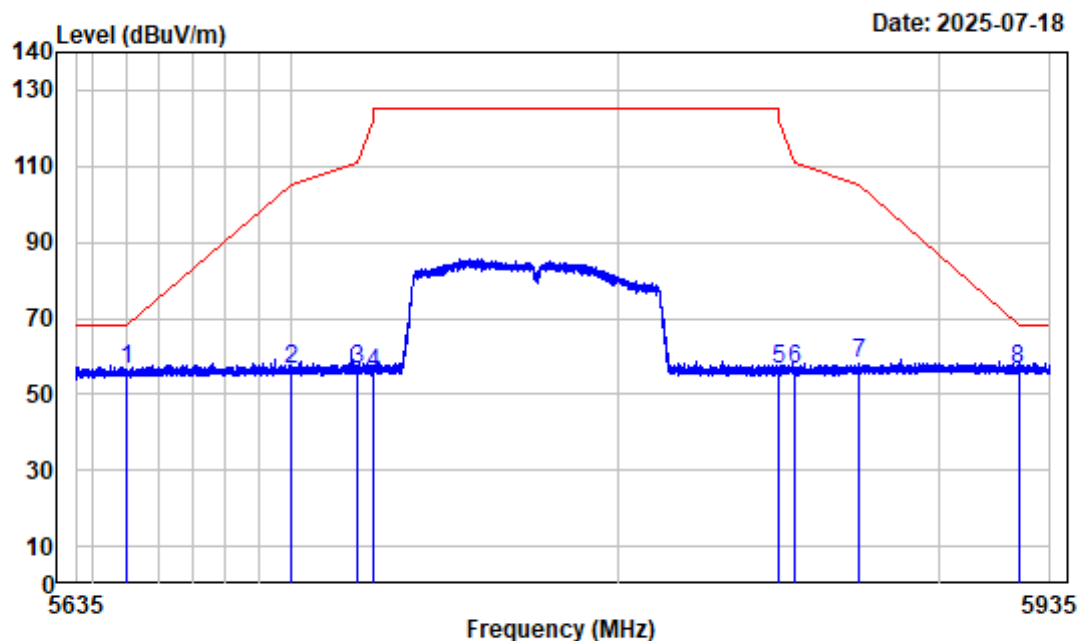

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Channel 5775MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.26	56.42	68.20	-11.78	peak
2	5700.000	-4.41	60.87	56.46	105.20	-48.74	peak
3	5720.000	-4.44	60.82	56.38	110.80	-54.42	peak
4	5725.000	-4.46	60.13	55.67	122.20	-66.53	peak
5	5850.000	-4.53	60.98	56.45	122.20	-65.75	peak
6	5855.000	-4.48	60.84	56.36	110.80	-54.44	peak
7	5875.000	-4.28	62.35	58.07	105.20	-47.13	peak
8	5925.000	-4.43	60.84	56.41	68.20	-11.79	peak

802.11ac80 Channel Bandedge_VERTICAL

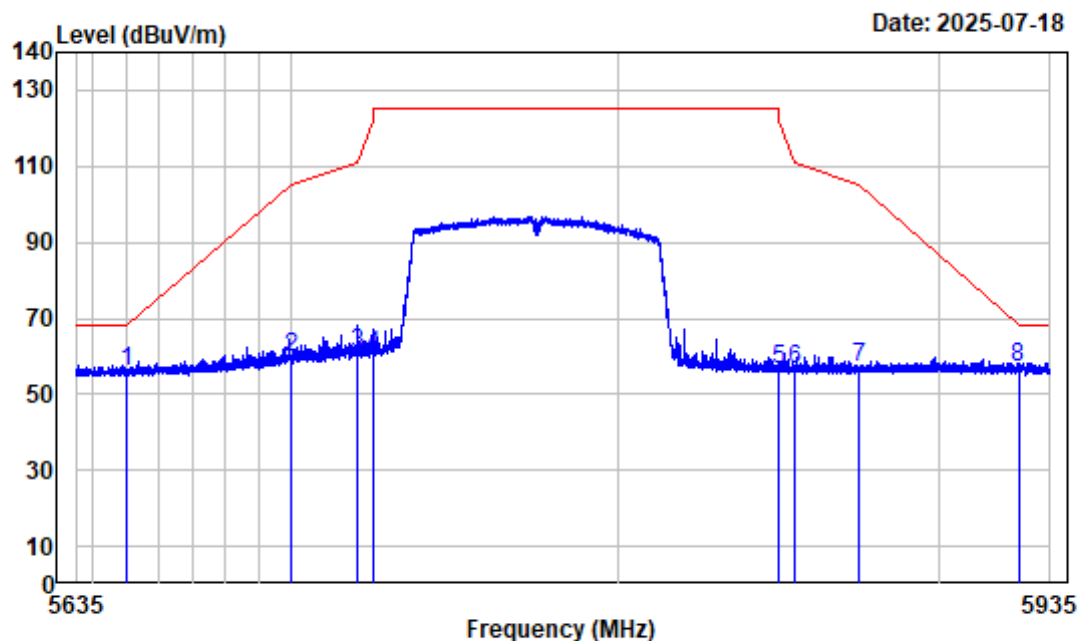

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504S23848E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11ac80 Channel 5775MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	61.00	56.16	68.20	-12.04	peak
2	5700.000	-4.41	63.94	59.53	105.20	-45.67	peak
3	5720.000	-4.44	65.03	60.59	110.80	-50.21	peak
4	5725.000	-4.46	64.95	60.49	122.20	-61.71	peak
5	5850.000	-4.53	61.13	56.60	122.20	-65.60	peak
6	5855.000	-4.48	61.18	56.70	110.80	-54.10	peak
7	5875.000	-4.28	61.41	57.13	105.20	-48.07	peak
8	5925.000	-4.43	61.43	57.00	68.20	-11.20	peak