




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,455.460	77.18			-0.87	H	17.9	2.00
4	2,483.500	32.65	54.00	21.35	-0.87	H	43.8	1.00
4	2,487.420	32.54	54.00	21.46	-0.86	H	0.8	2.00

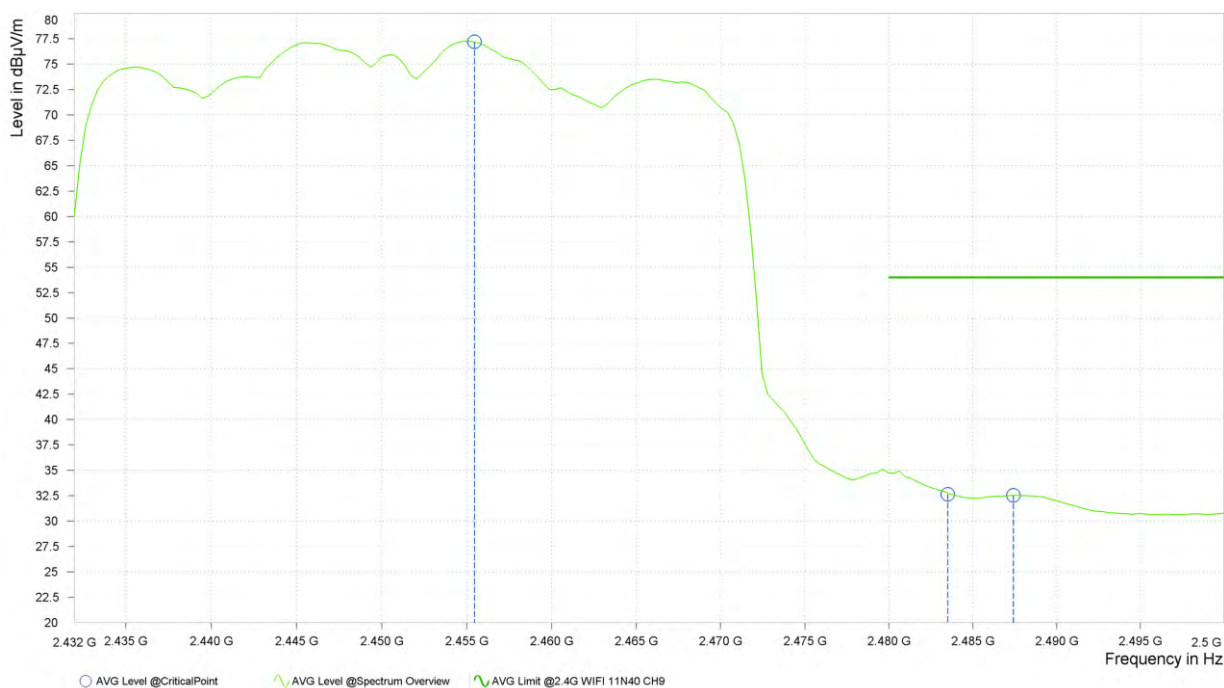




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,453.080	103.33			-0.86	V	315.1	2.00
4	2,483.500	49.79	74.00	24.21	-0.87	V	359.1	1.00
4	2,486.060	51.36	74.00	22.64	-0.86	V	359.1	1.00

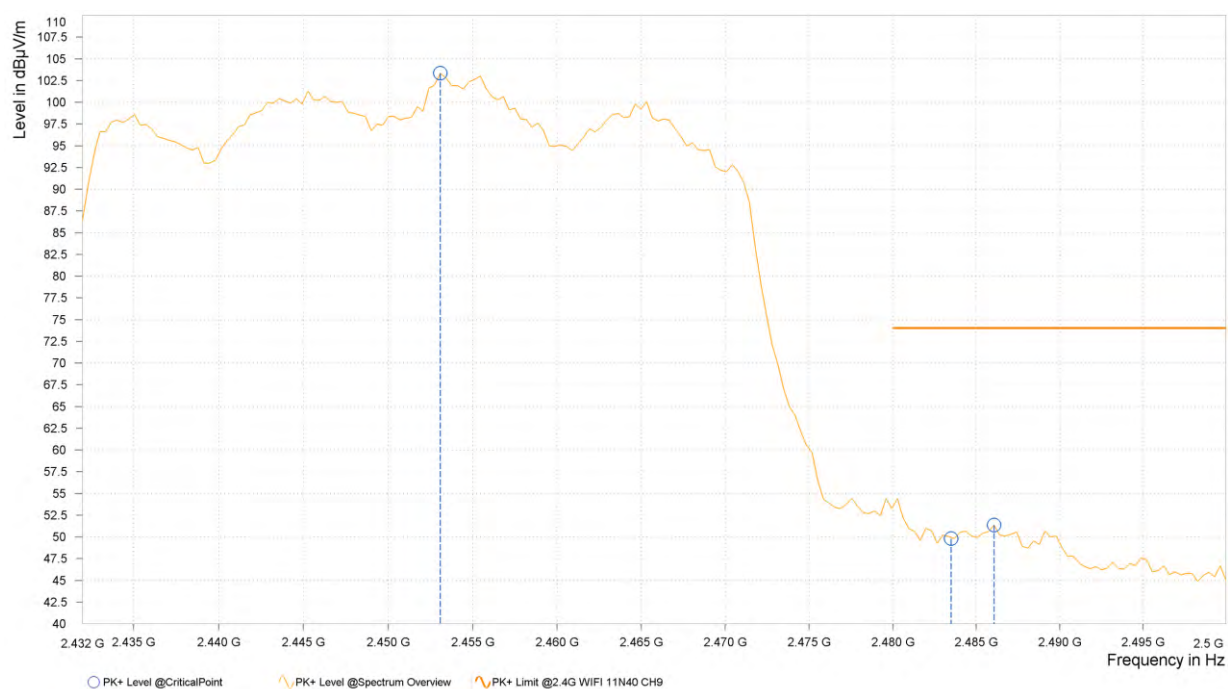



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,455.120	84.59			-0.87	V	314	2.00
4	2,483.500	33.99	54.00	20.01	-0.87	V	3.8	2.00
4	2,486.740	34.95	54.00	19.05	-0.86	V	3.8	2.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2452MHz: Fundamental frequency.




2.4G WIFI-RU

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,321.760	44.11	74.00	29.89	-1.36	H	197.9	1.00
1	2,390.000	43.84	74.00	30.16	-1.05	H	359	1.00
1	2,409.680	96.21			-0.90	H	249.4	1.00

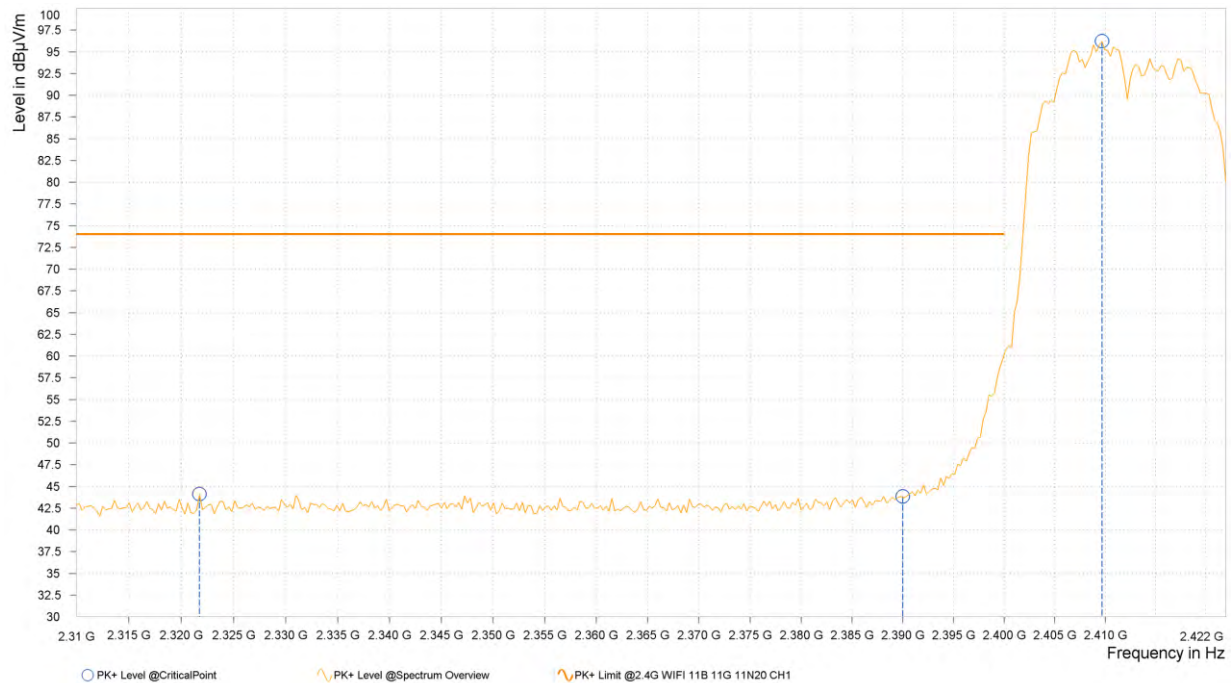




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,386.720	30.07	54.00	23.93	-1.07	H	359.1	1.00
1	2,390.000	30.69	54.00	23.31	-1.05	H	1	2.00
1	2,410.240	82.13			-0.89	H	247	1.00

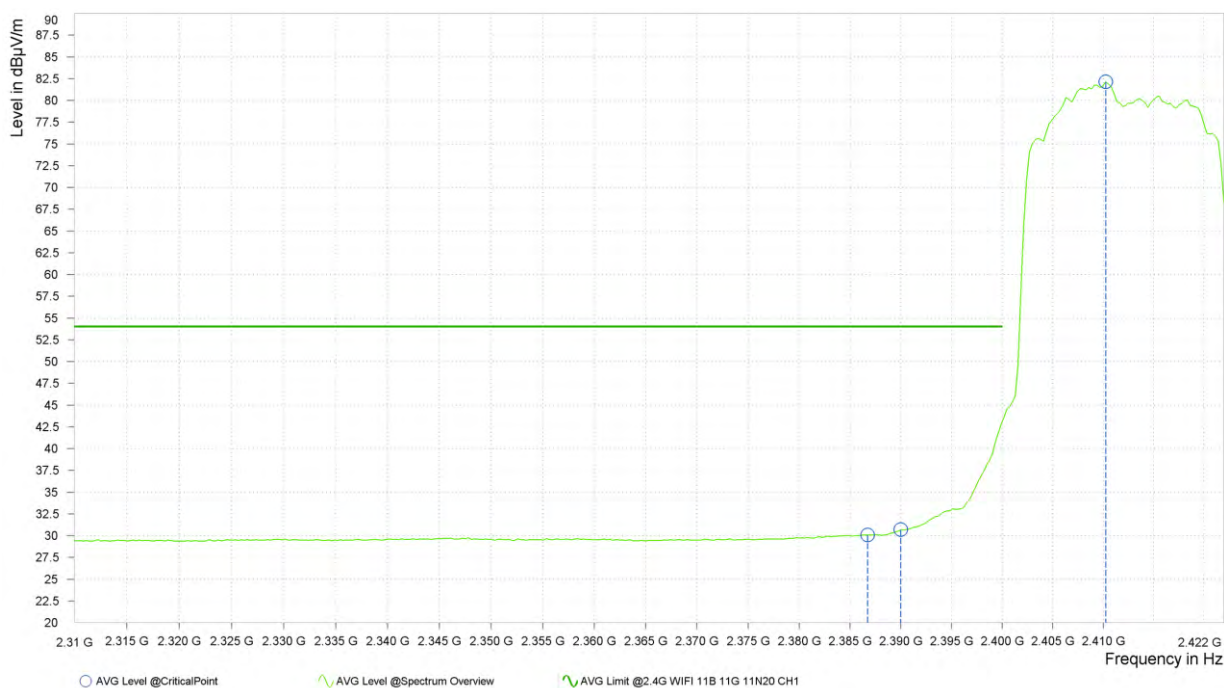



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.240	46.82	74.00	27.18	-1.05	V	22.5	2.00
1	2,390.000	46.86	74.00	27.14	-1.05	V	254.2	2.00
1	2,414.440	102.21			-0.86	V	189.5	1.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.560	31.27	54.00	22.73	-1.07	V	15	2.00
1	2,390.000	32.35	54.00	21.65	-1.05	V	15	2.00
1	2,413.880	87.78			-0.86	V	1	1.00

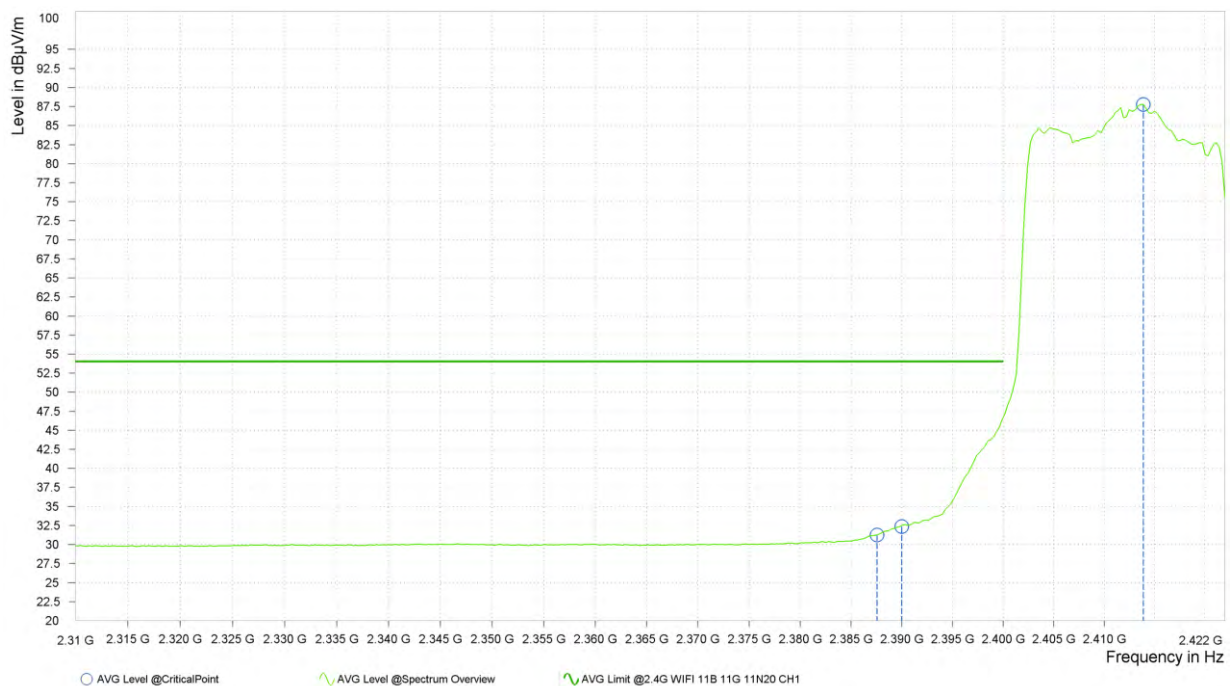

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.86	74.00	25.14	37.98	54.00	16.02	13.53	H	1	2.00
2	7,311.000	55.03	74.00	18.97	43.54	54.00	10.46	18.89	H	2.6	2.00

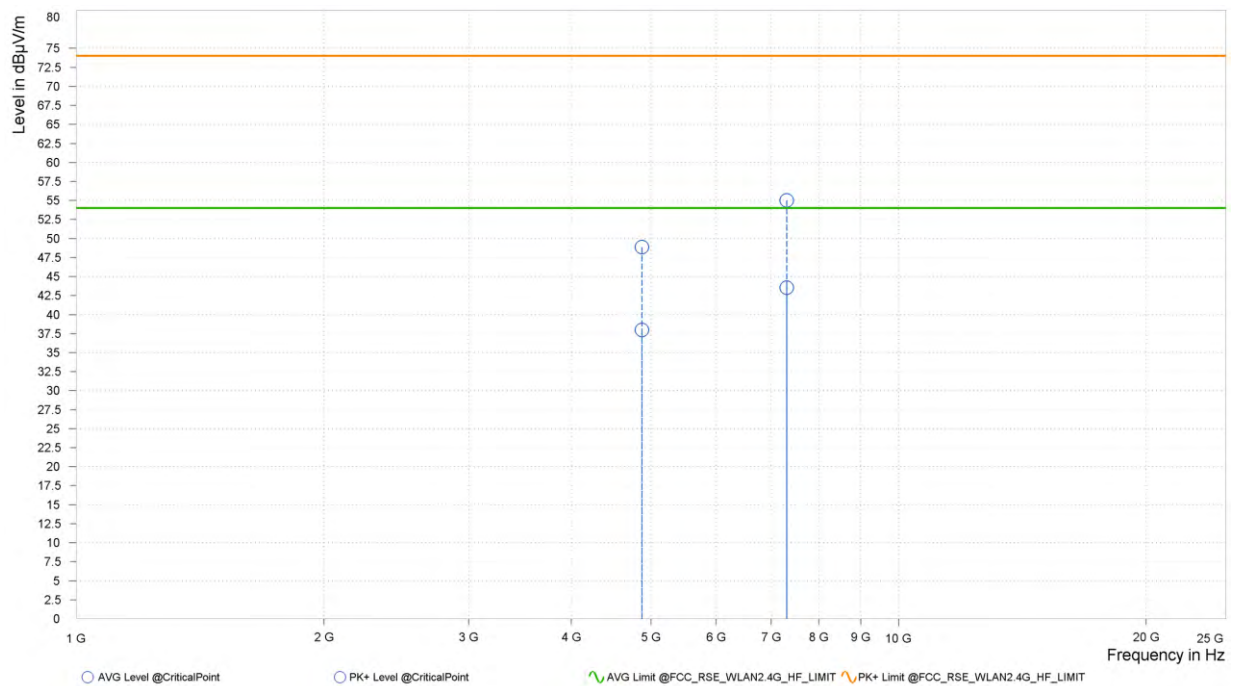




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.66	74.00	25.34	38.02	54.00	15.98	13.53	V	1	2.00
2	7,311.000	55.11	74.00	18.89	43.63	54.00	10.37	18.89	V	2.2	2.00

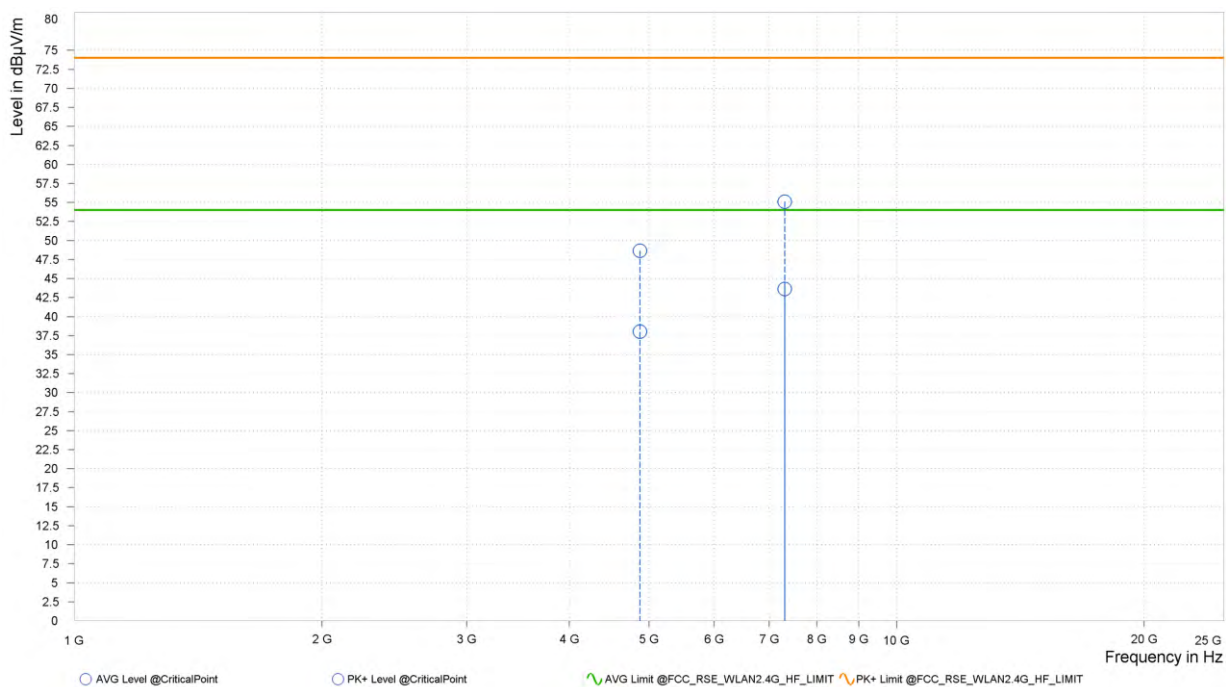



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,464.240	96.15			-0.91	H	214.7	2.00
2	2,483.500	44.45	74.00	29.55	-0.87	H	359.1	1.00
2	2,488.600	48.74	74.00	25.26	-0.85	H	315.2	2.00

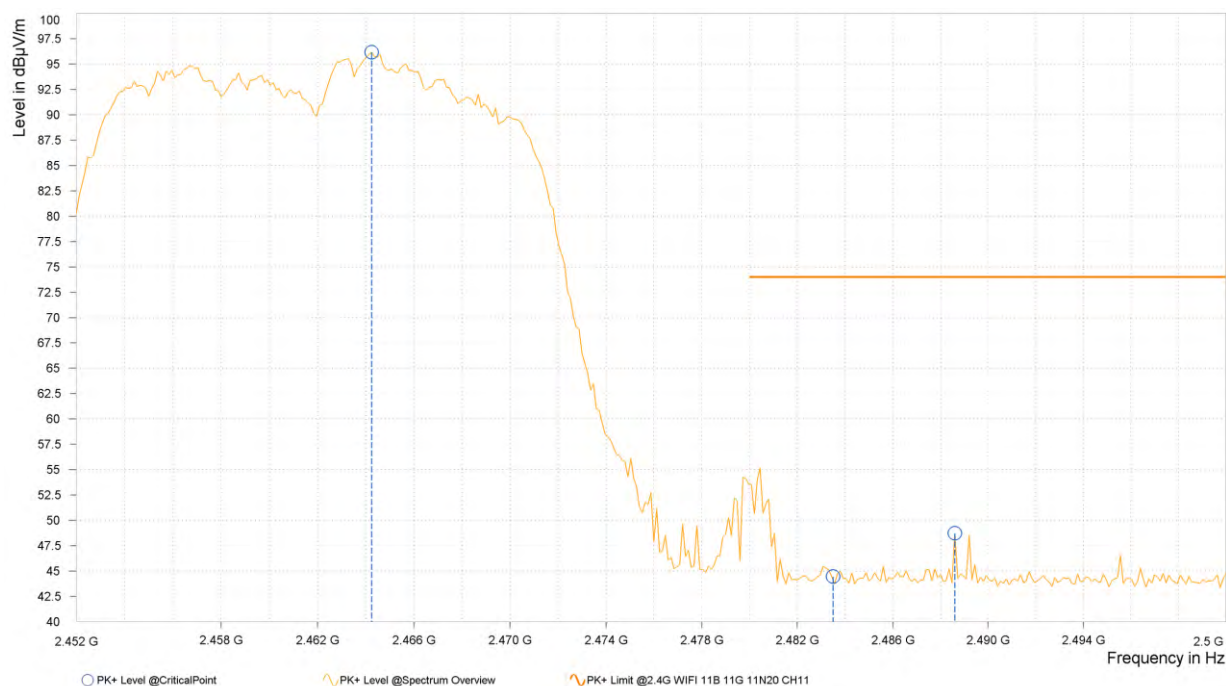

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China


Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.520	82.30			-0.91	H	213.4	2.00
2	2,483.500	31.95	54.00	22.05	-0.87	H	213.4	2.00
2	2,485.960	31.64	54.00	22.36	-0.86	H	213.4	2.00

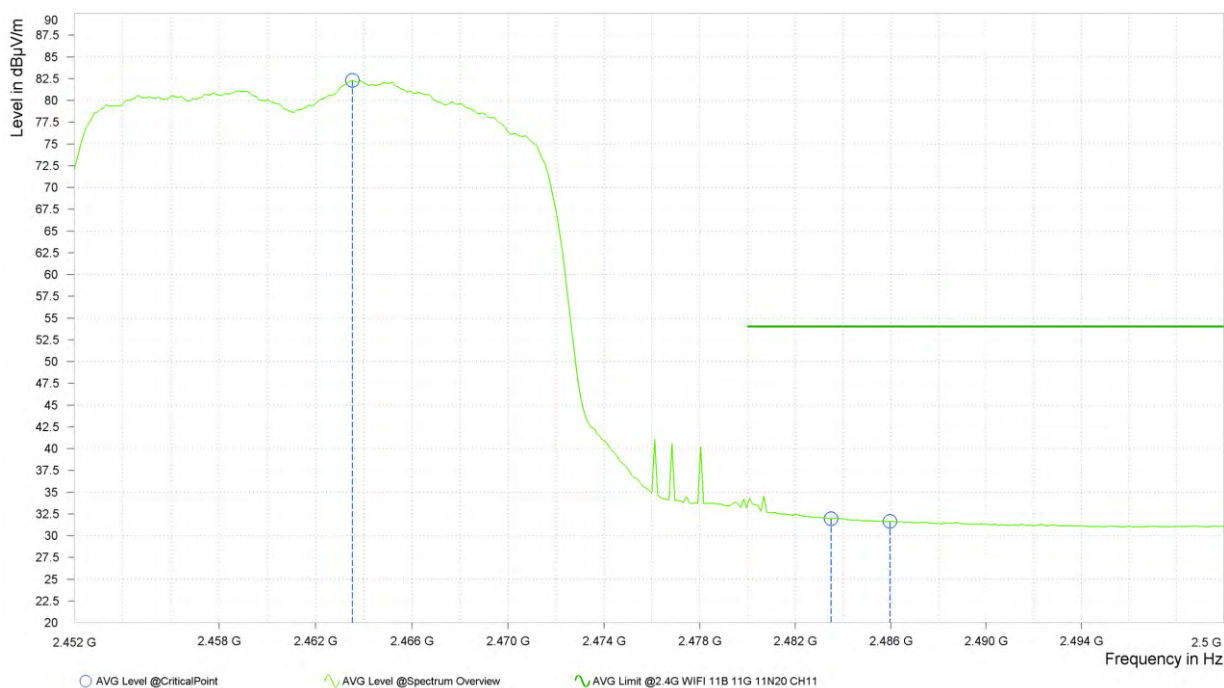




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,461.000	103.39			-0.90	V	43.7	1.00
2	2,483.500	51.10	74.00	22.90	-0.87	V	260.2	2.00
2	2,484.280	50.70	74.00	23.30	-0.87	V	260.2	2.00

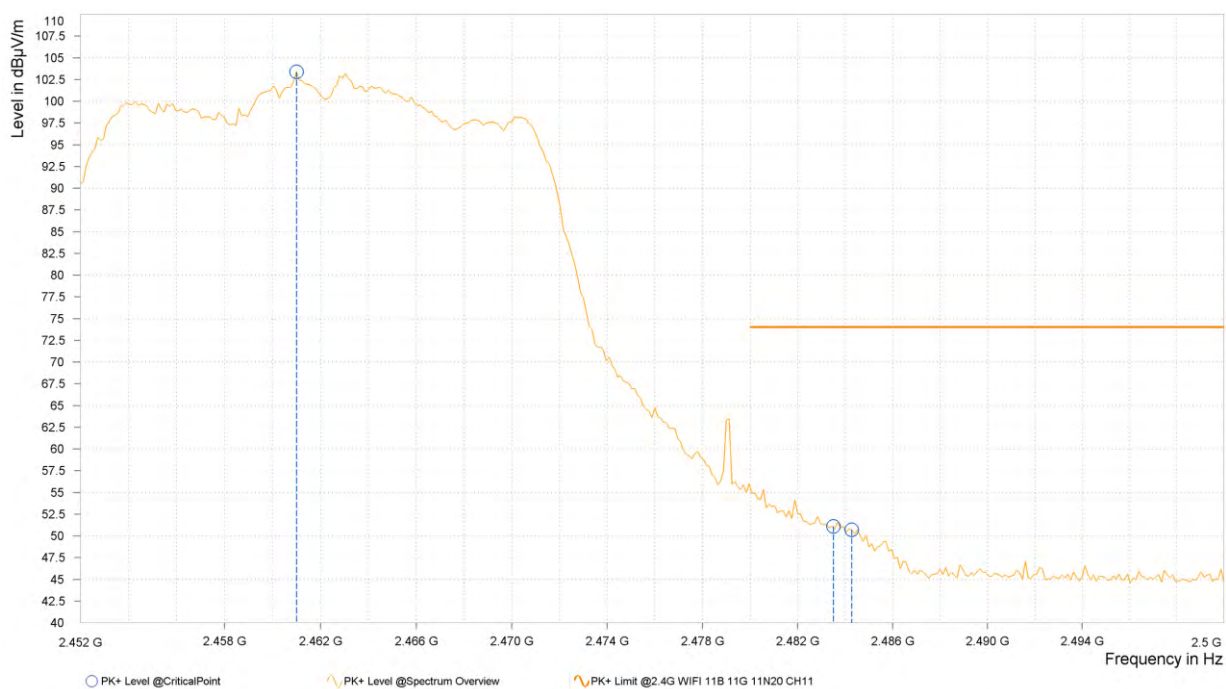




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.760	89.19			-0.91	V	195.5	1.00
2	2,483.500	34.09	54.00	19.91	-0.87	V	359.1	1.00
2	2,484.400	33.77	54.00	20.23	-0.87	V	359.1	1.00

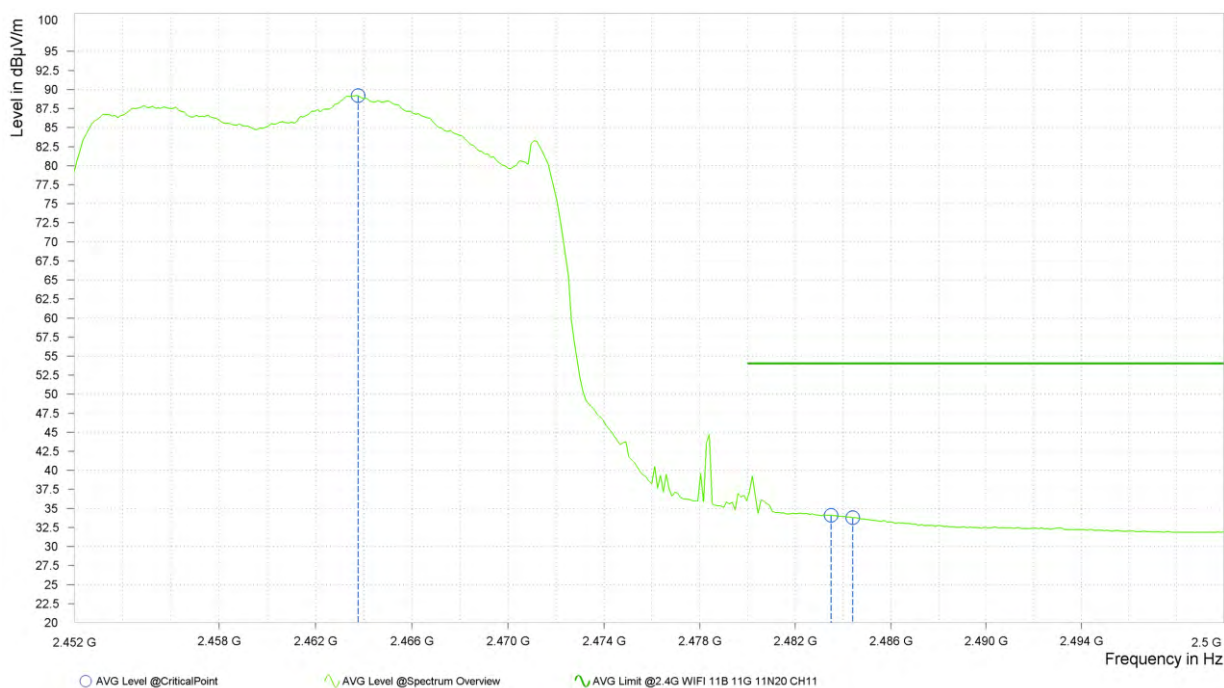



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,342.480	44.55	74.00	29.45	-1.28	H	194.3	1.00
1	2,390.000	43.56	74.00	30.44	-1.05	H	1.4	2.00
1	2,408.840	93.37			-0.90	H	343.8	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,383.360	29.78	54.00	24.22	-1.10	H	357.4	1.00
1	2,390.000	30.26	54.00	23.74	-1.05	H	55.7	1.00
1	2,409.120	82.20			-0.90	H	357.4	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,362.080	44.49	74.00	29.51	-1.22	V	0.9	2.00
1	2,390.000	43.81	74.00	30.19	-1.05	V	1	1.00
1	2,413.880	98.83			-0.86	V	2.6	2.00





**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,386.160	30.69	54.00	23.31	-1.08	V	0.9	2.00
1	2,390.000	31.10	54.00	22.90	-1.05	V	0.9	2.00
1	2,413.880	87.59			-0.86	V	0.9	2.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.35	74.00	25.65	37.79	54.00	16.21	13.53	H	108.1	1.00
2	7,311.000	54.74	74.00	19.26	43.62	54.00	10.38	18.89	H	0.9	2.00

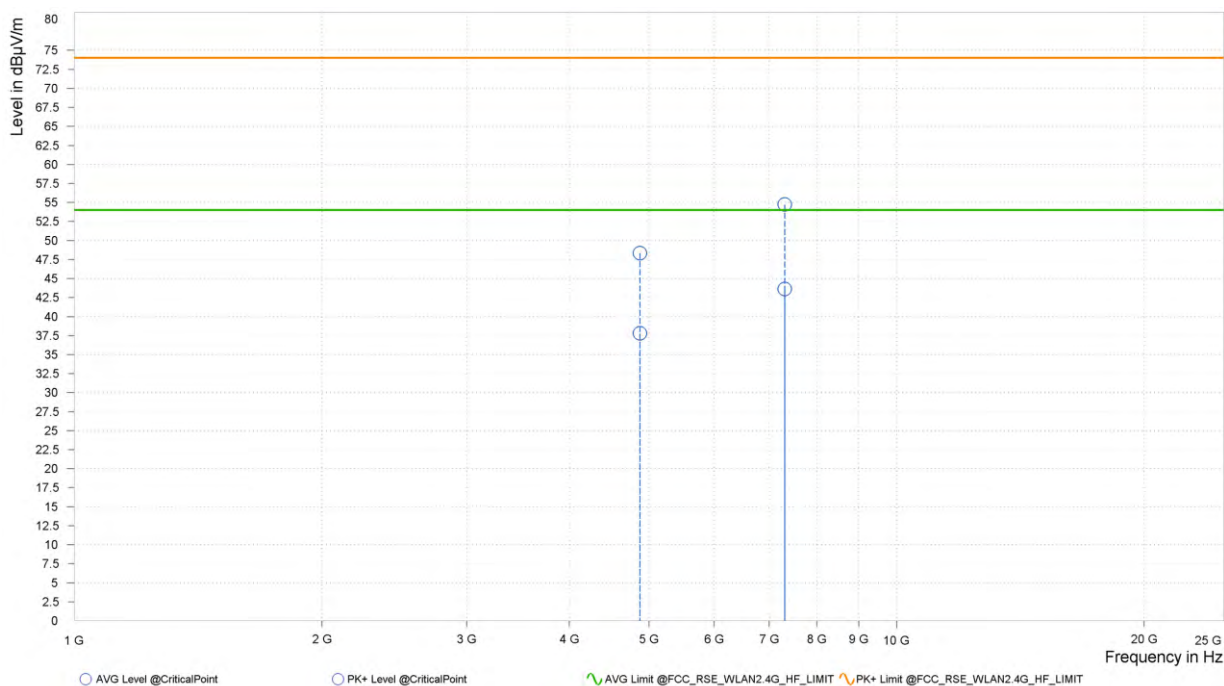




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.14	74.00	24.86	37.88	54.00	16.12	13.53	V	247.2	2.00
2	7,311.000	55.25	74.00	18.75	43.66	54.00	10.34	18.89	V	0.9	2.00

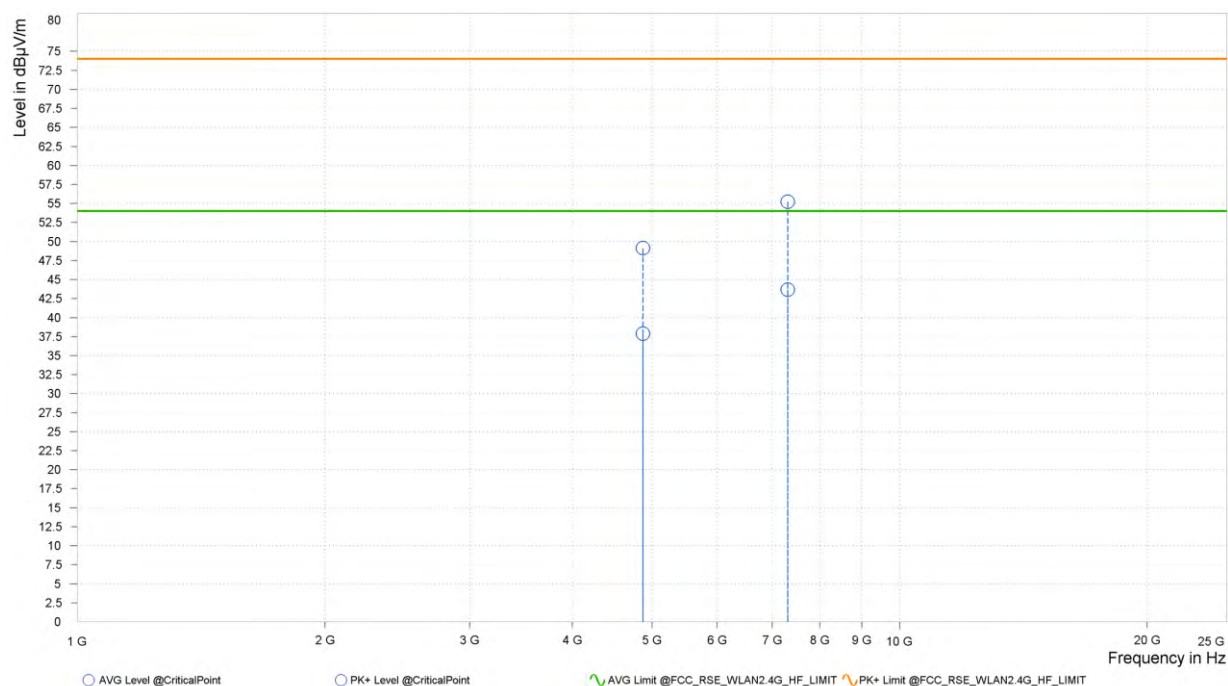

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,458.000	93.28			-0.89	H	215.8	2.00
2	2,483.500	44.61	74.00	29.39	-0.87	H	266.1	2.00
2	2,492.440	49.20	74.00	24.80	-0.84	H	316.3	2.00

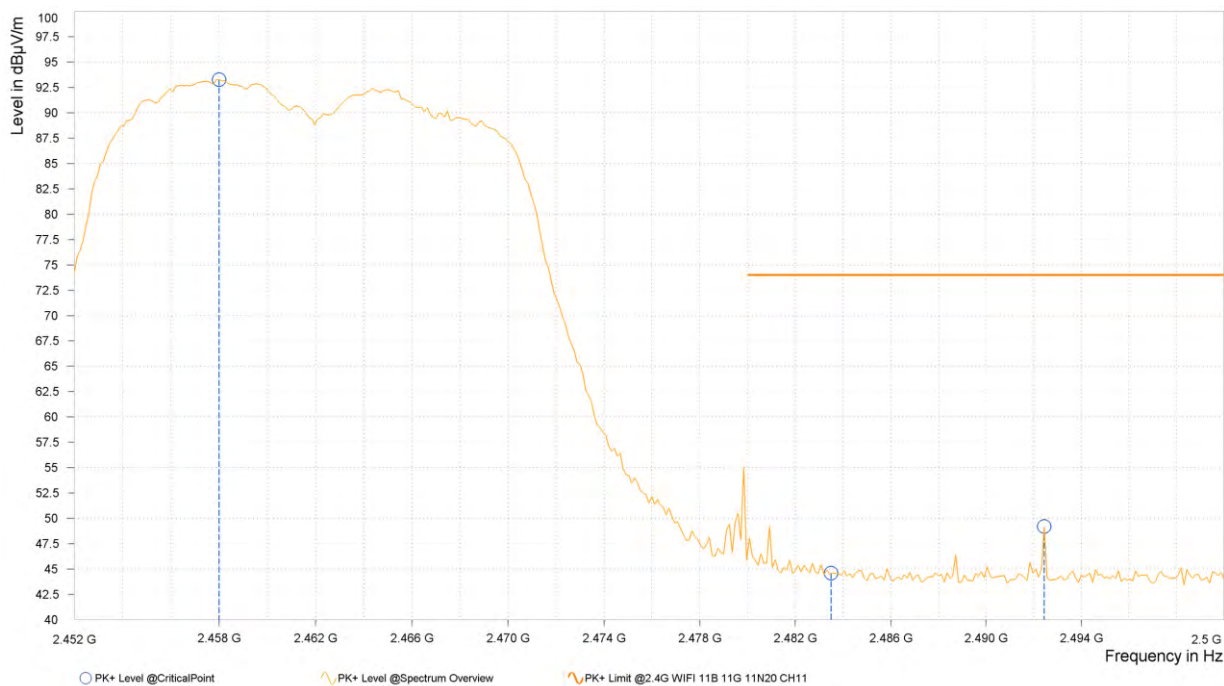




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,456.800	81.49			-0.88	H	212.2	2.00
2	2,483.500	31.27	54.00	22.73	-0.87	H	358.6	1.00
2	2,485.000	31.14	54.00	22.86	-0.86	H	212.2	2.00

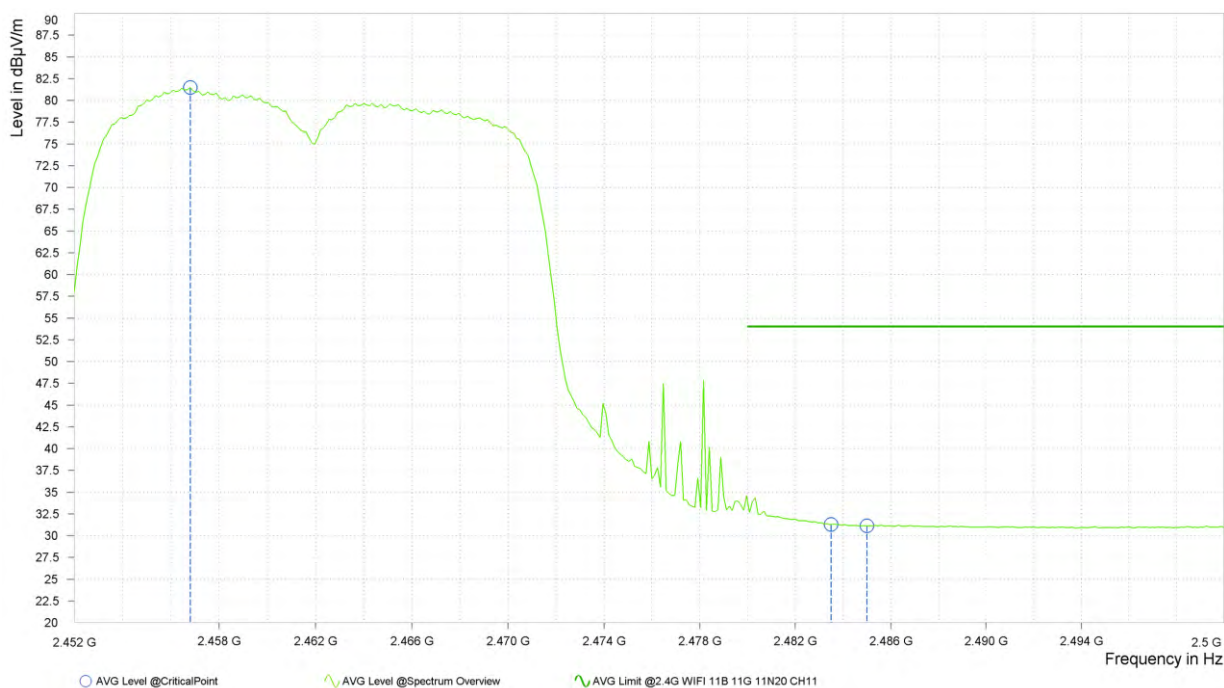




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.400	101.59			-0.91	V	1	2.00
2	2,483.500	45.76	74.00	28.24	-0.87	V	62.8	2.00
2	2,497.240	48.02	74.00	25.98	-0.83	V	1	2.00

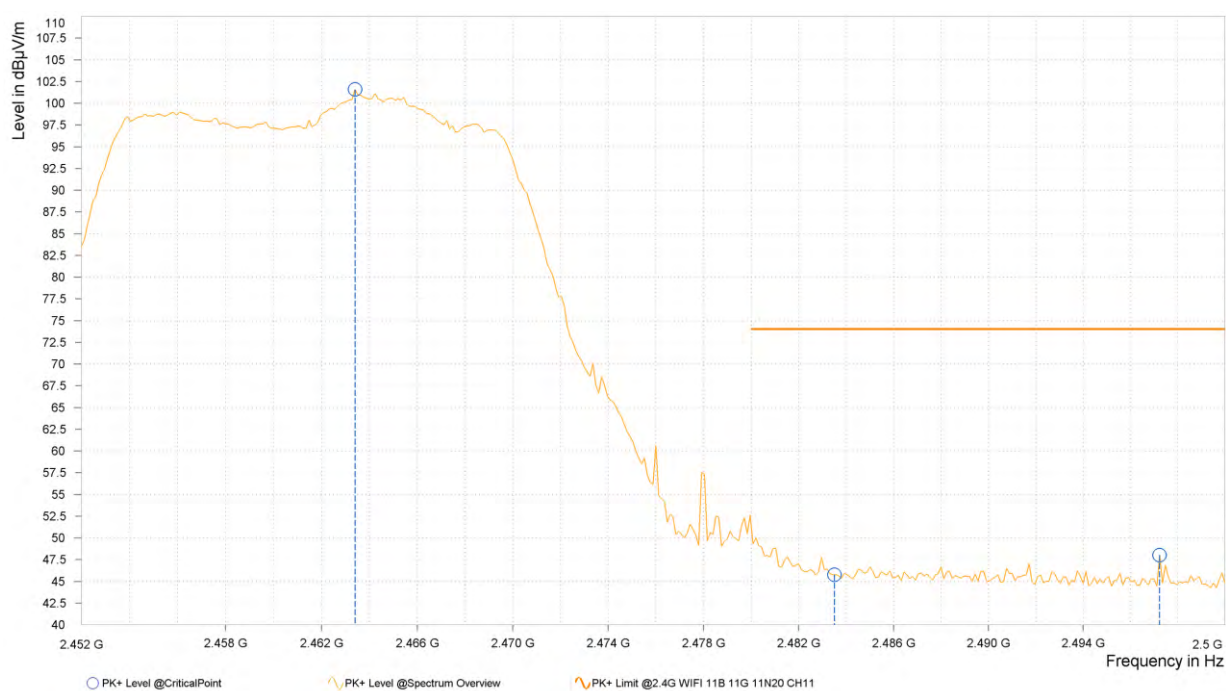




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.520	89.55			-0.91	V	359	2.00
2	2,483.500	32.66	54.00	21.34	-0.87	V	358.3	1.00
2	2,485.360	32.67	54.00	21.33	-0.86	V	359.1	1.00

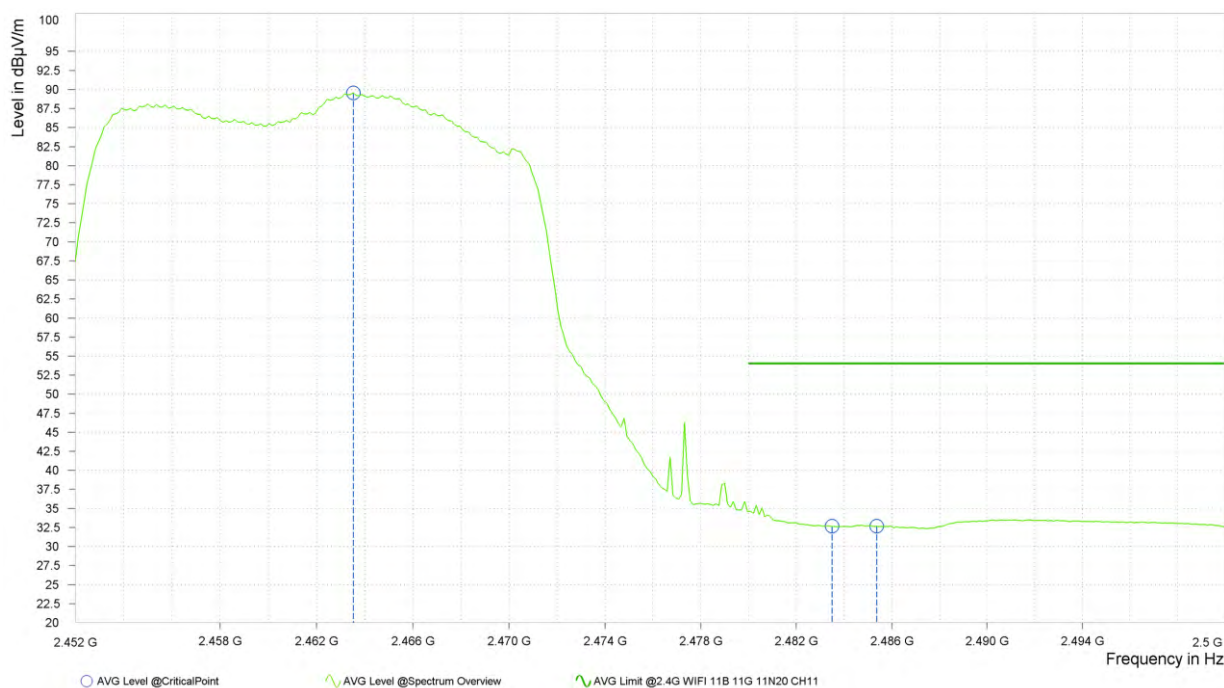

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,387.840	44.56	74.00	29.44	-1.06	H	1	1.00
1	2,390.000	43.13	74.00	30.87	-1.05	H	358.6	1.00
1	2,411.360	92.63			-0.88	H	249.4	1.00

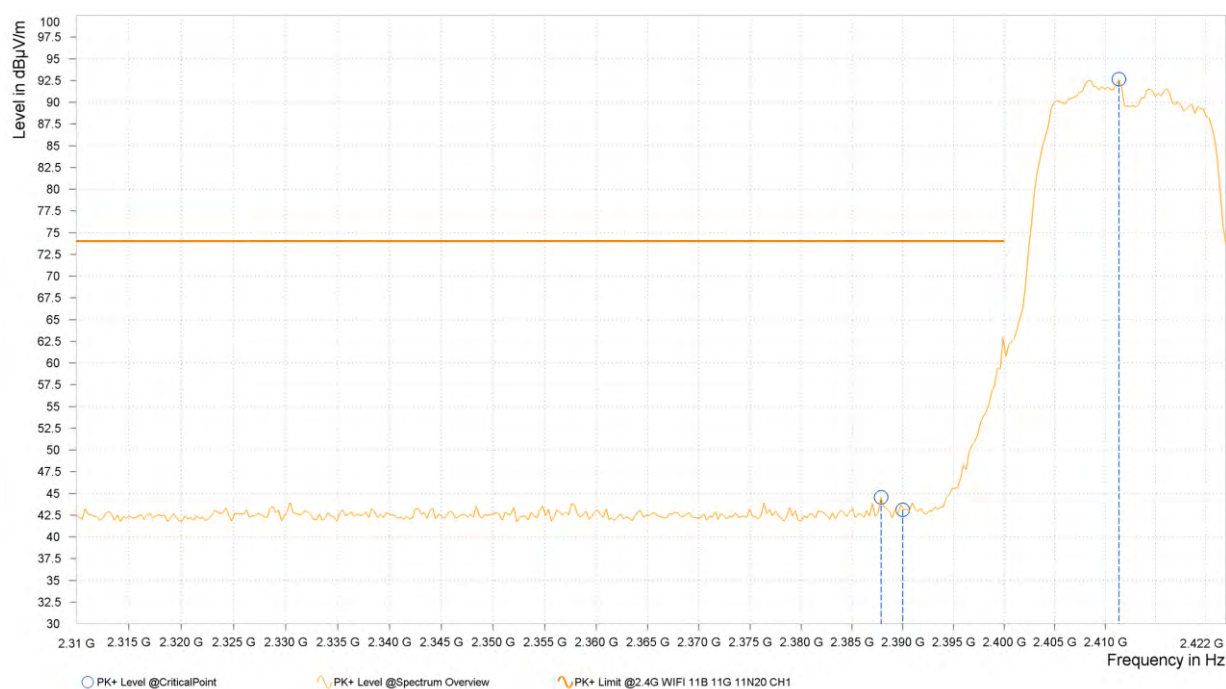



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,386.720	29.71	54.00	24.29	-1.07	H	1	1.00
1	2,390.000	29.93	54.00	24.07	-1.05	H	46.2	1.00
1	2,408.840	81.26			-0.90	H	1	1.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.400	30.74	54.00	23.26	-1.06	V	296	2.00
1	2,390.000	31.02	54.00	22.98	-1.05	V	296	2.00
1	2,412.760	87.98			-0.87	V	296	2.00

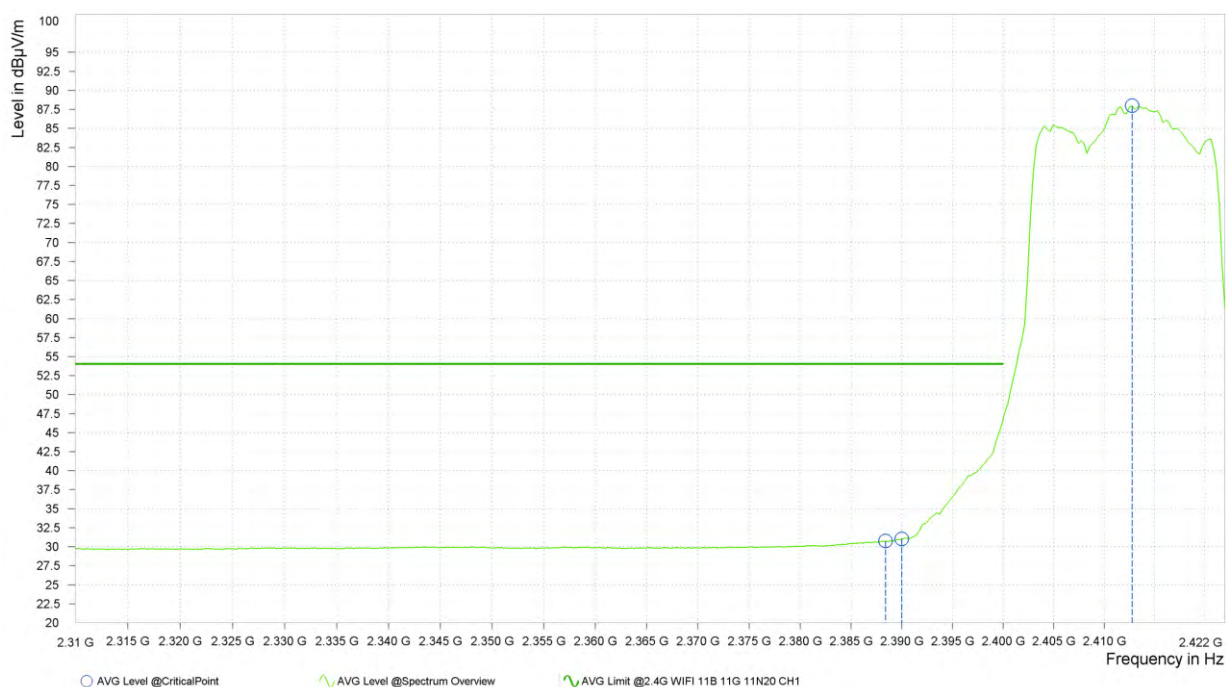



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.800	45.02	74.00	28.99	-1.05	V	289.9	2.00
1	2,390.000	43.21	74.00	30.79	-1.05	V	289.9	2.00
1	2,413.880	99.17			-0.86	V	0.9	2.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.93	74.00	25.07	37.90	54.00	16.10	13.53	H	0.9	2.00
2	7,311.000	55.02	74.00	18.98	43.49	54.00	10.51	18.89	H	359.1	1.00

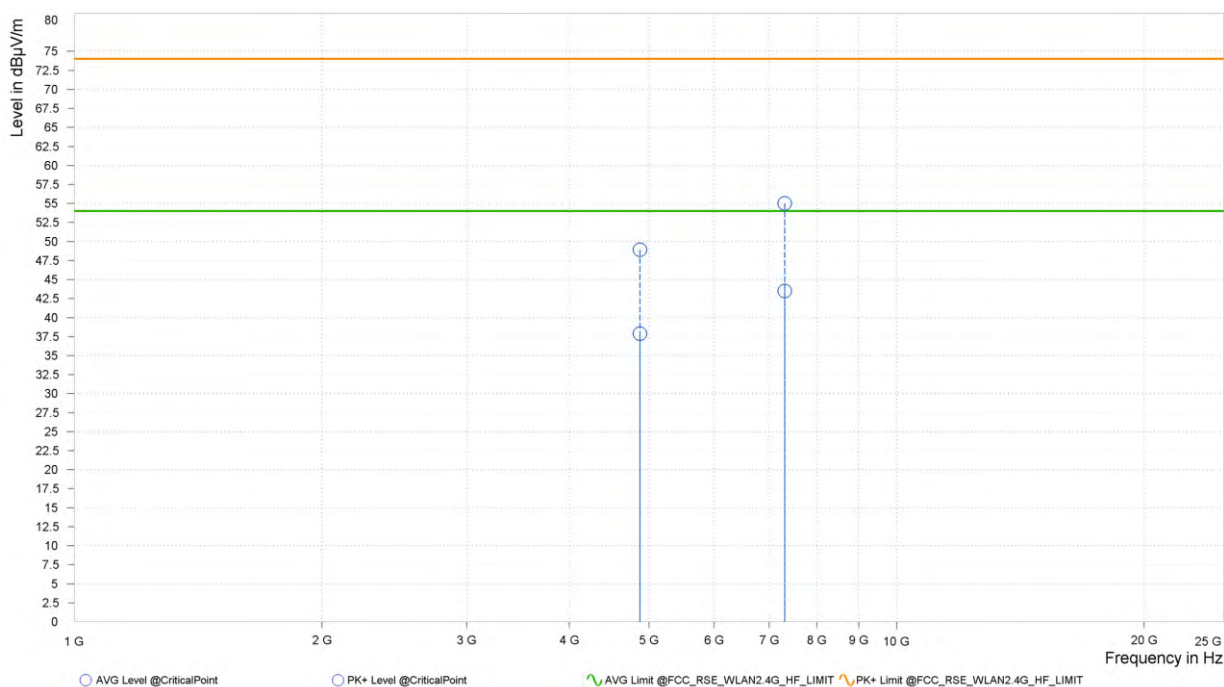




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.57	74.00	25.43	37.87	54.00	16.13	13.53	V	359.1	1.00
2	7,311.000	53.76	74.00	20.24	43.52	54.00	10.48	18.89	V	1	2.00

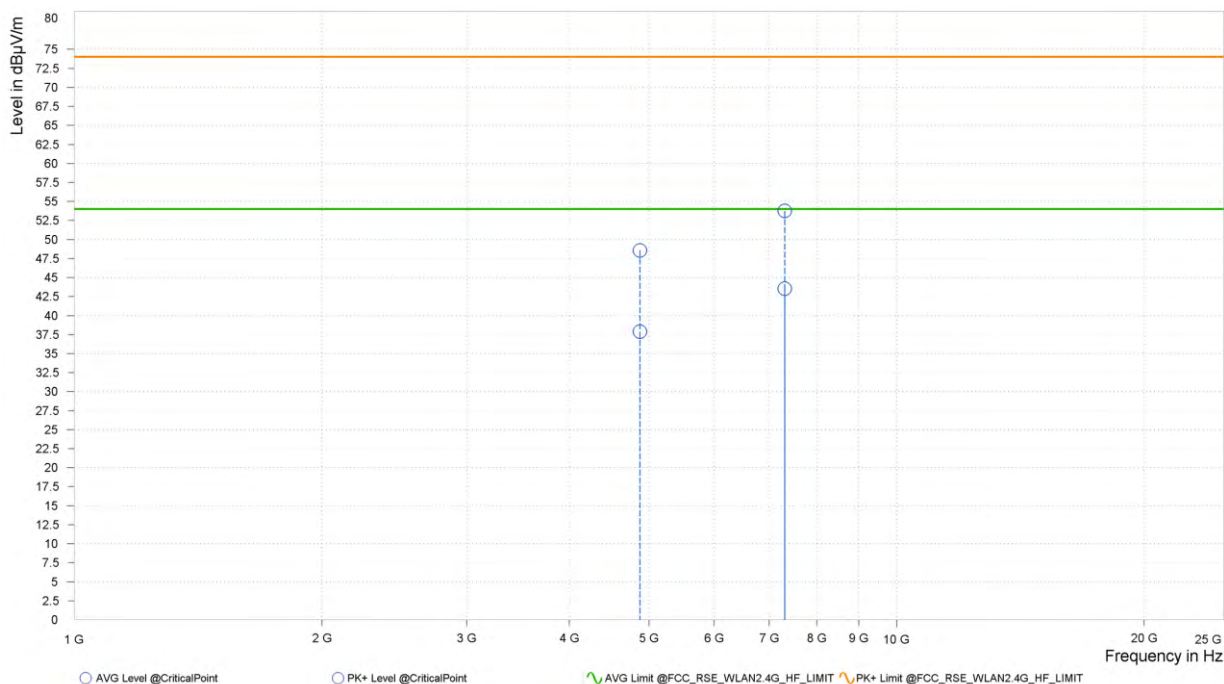

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,459.200	96.18			-0.89	H	359.1	1.00
2	2,483.500	44.42	74.00	29.58	-0.87	H	264.8	2.00
2	2,489.680	50.91	74.00	23.09	-0.85	H	315.1	2.00

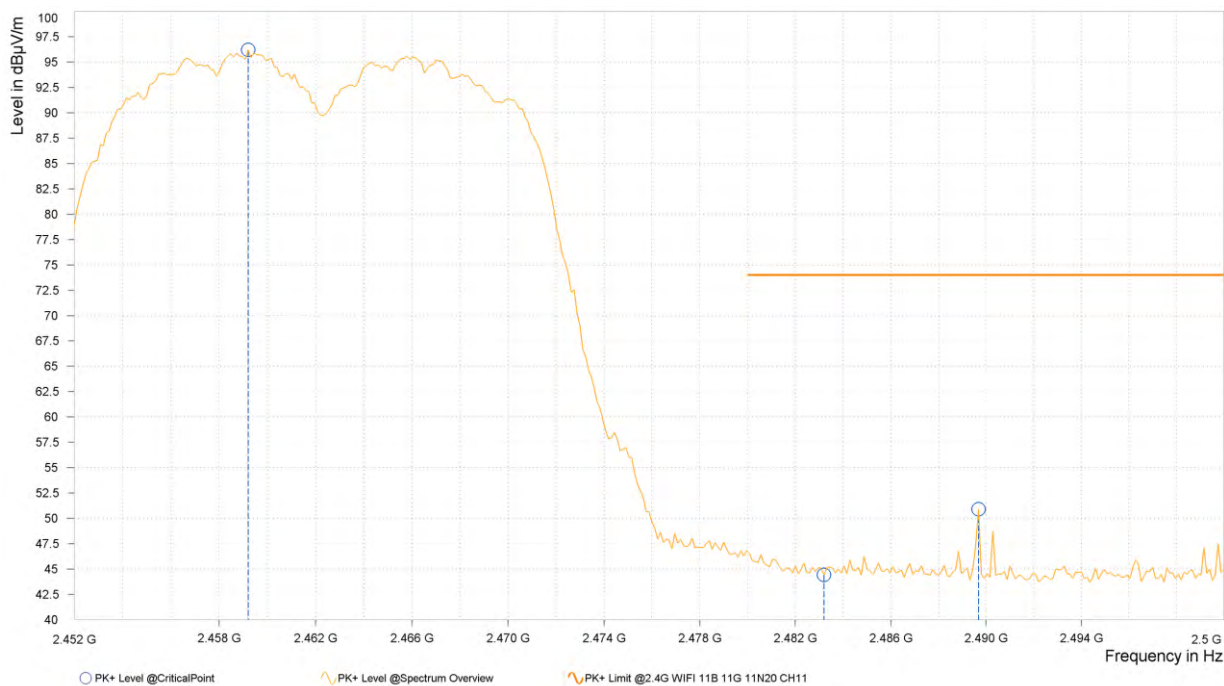




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,465.080	83.42			-0.92	H	213.5	2.00
2	2,483.500	31.70	54.00	22.30	-0.87	H	297.3	1.00
2	2,483.920	31.70	54.00	22.30	-0.87	H	15.7	2.00

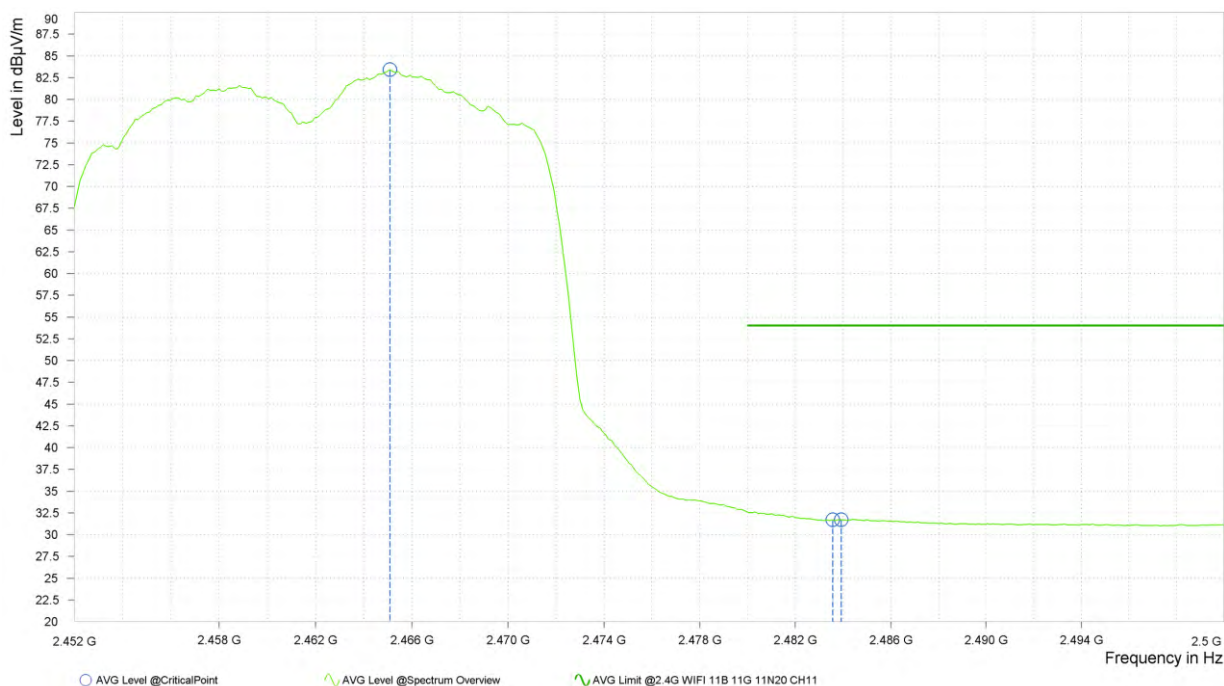




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.040	105.41			-0.91	V	1	2.00
2	2,483.500	49.33	74.00	24.67	-0.87	V	359.1	1.00
2	2,485.000	50.33	74.00	23.67	-0.86	V	196.7	1.00

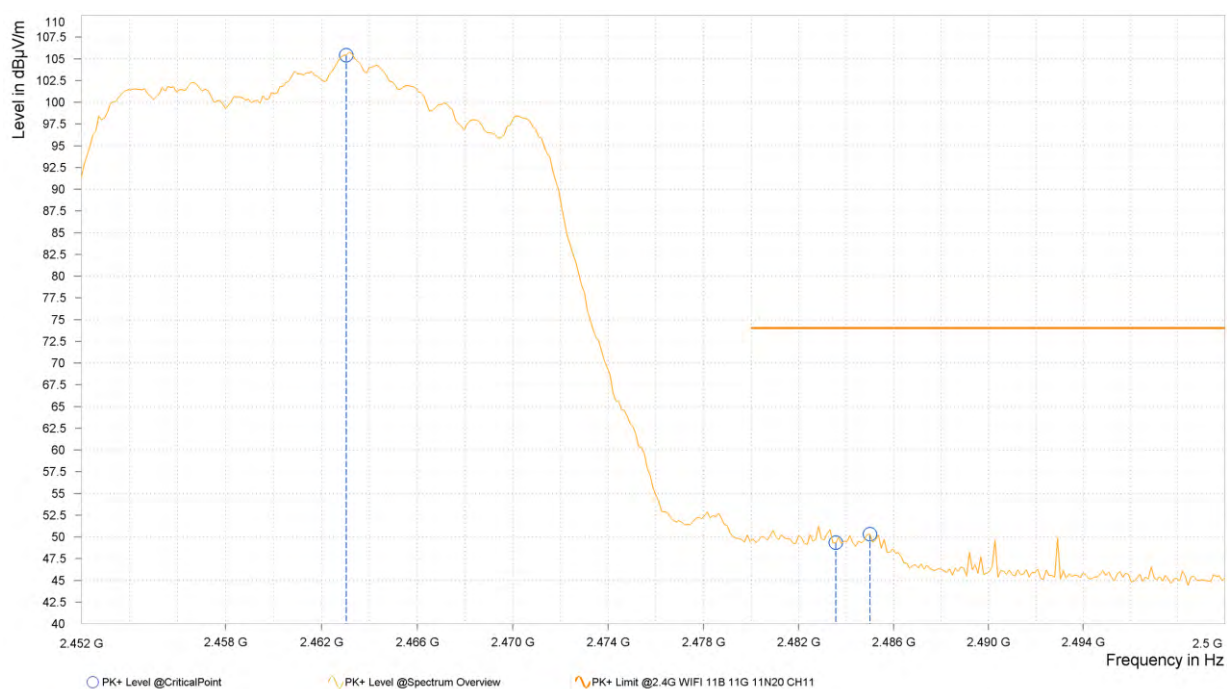




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.520	90.15			-0.91	V	1.7	2.00
2	2,483.500	35.37	54.00	18.63	-0.87	V	195.5	1.00
2	2,483.920	35.14	54.00	18.86	-0.87	V	359	1.00

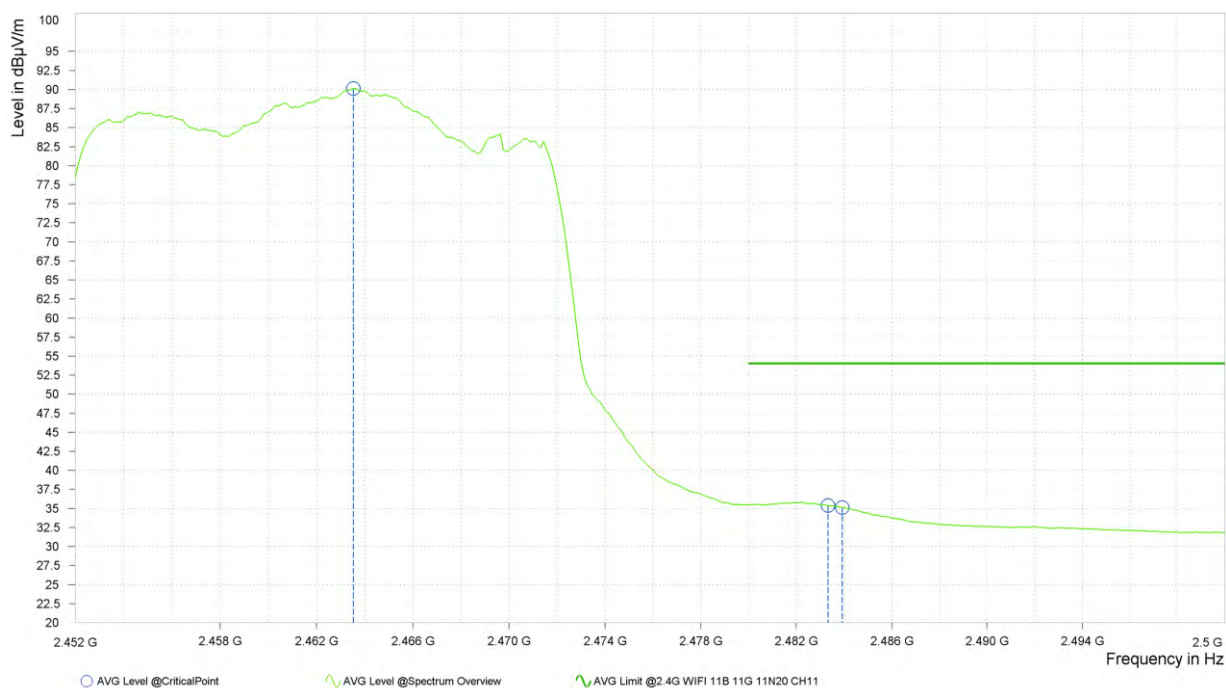

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2412MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,364.880	44.17	74.00	29.83	-1.22	H	4.6	1.00
1	2,390.000	44.22	74.00	29.78	-1.05	H	297.3	1.00
1	2,409.960	94.29			-0.89	H	359	1.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.960	29.78	54.00	24.22	-1.06	H	62.9	2.00
1	2,390.000	30.05	54.00	23.95	-1.05	H	1	1.00
1	2,409.400	77.36			-0.90	H	1	1.00

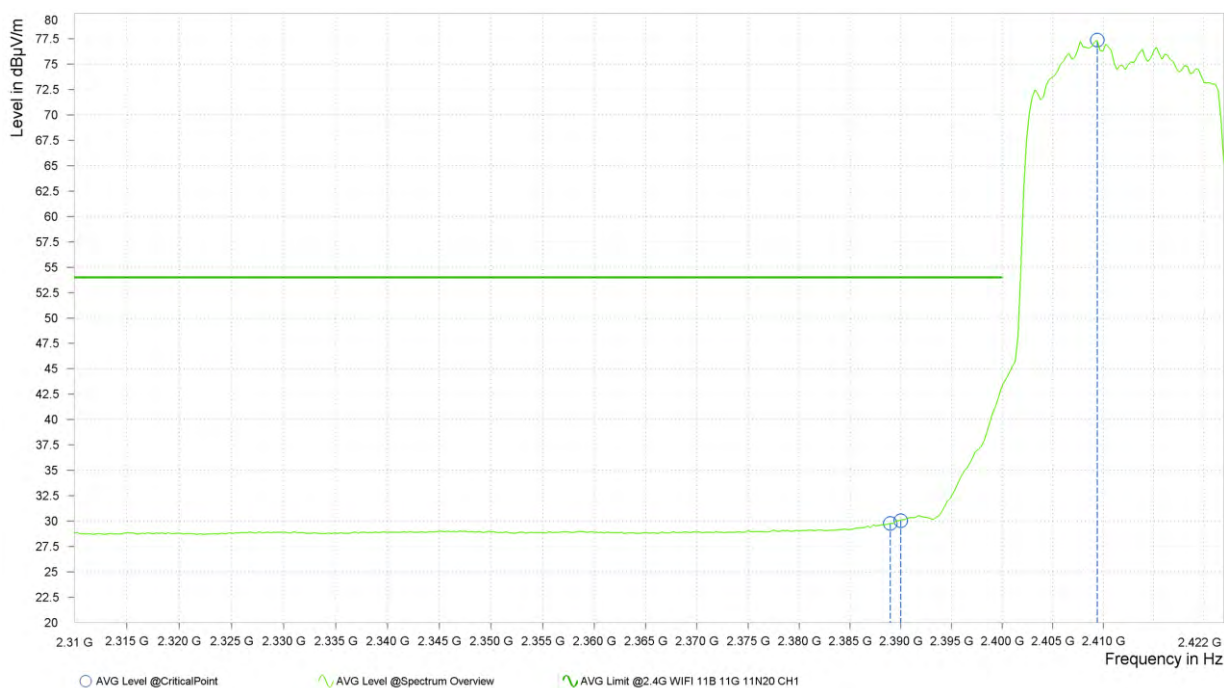




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,383.640	45.12	74.00	28.88	-1.10	V	197.8	1.00
1	2,390.000	45.93	74.00	28.07	-1.05	V	248.2	1.00
1	2,413.040	102.47			-0.87	V	359	2.00

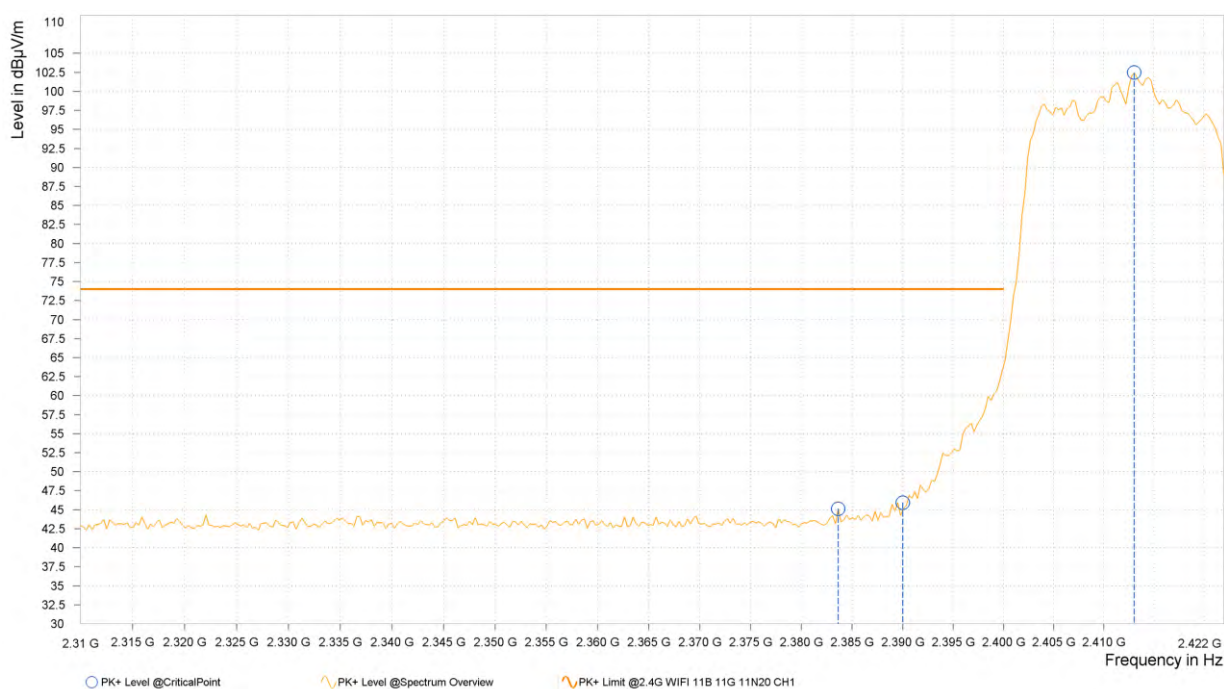




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,388.120	30.73	54.00	23.27	-1.06	V	5.2	1.00
1	2,390.000	31.40	54.00	22.60	-1.05	V	5.2	1.00
1	2,413.600	85.19			-0.87	V	1	2.00

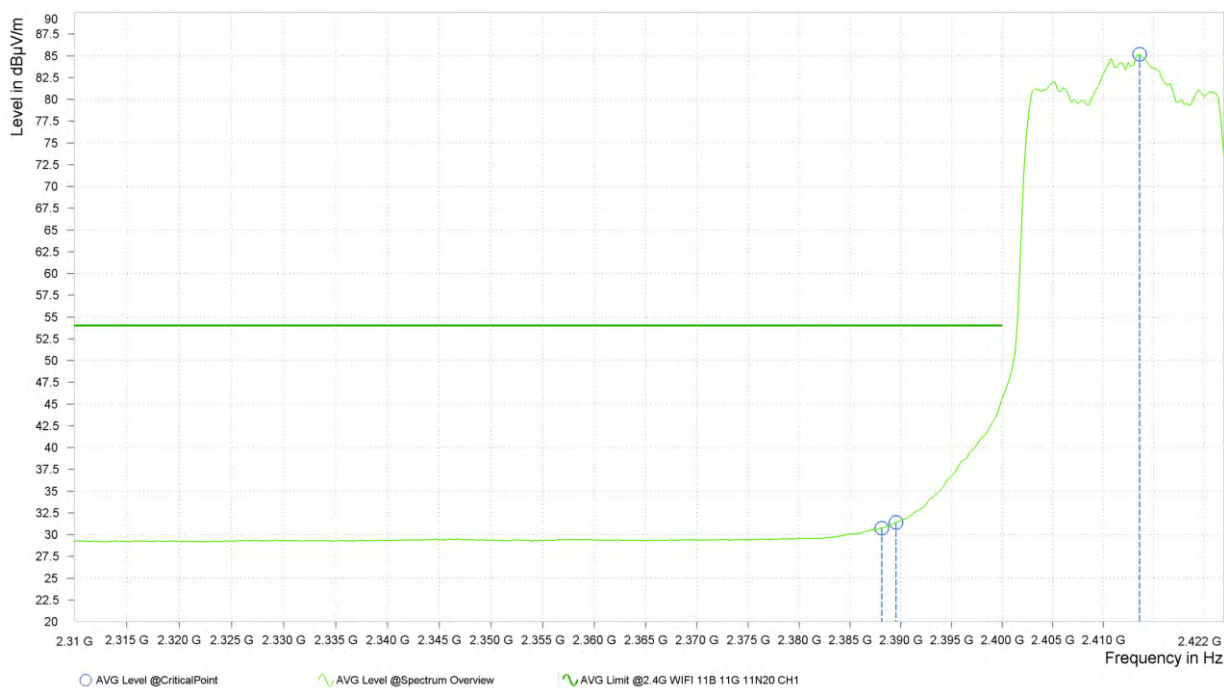

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	48.83	74.00	25.17	37.82	54.00	16.18	13.53	H	358.5	1.00
2	7,311.000	55.70	74.00	18.30	43.97	54.00	10.03	18.89	H	0.9	2.00

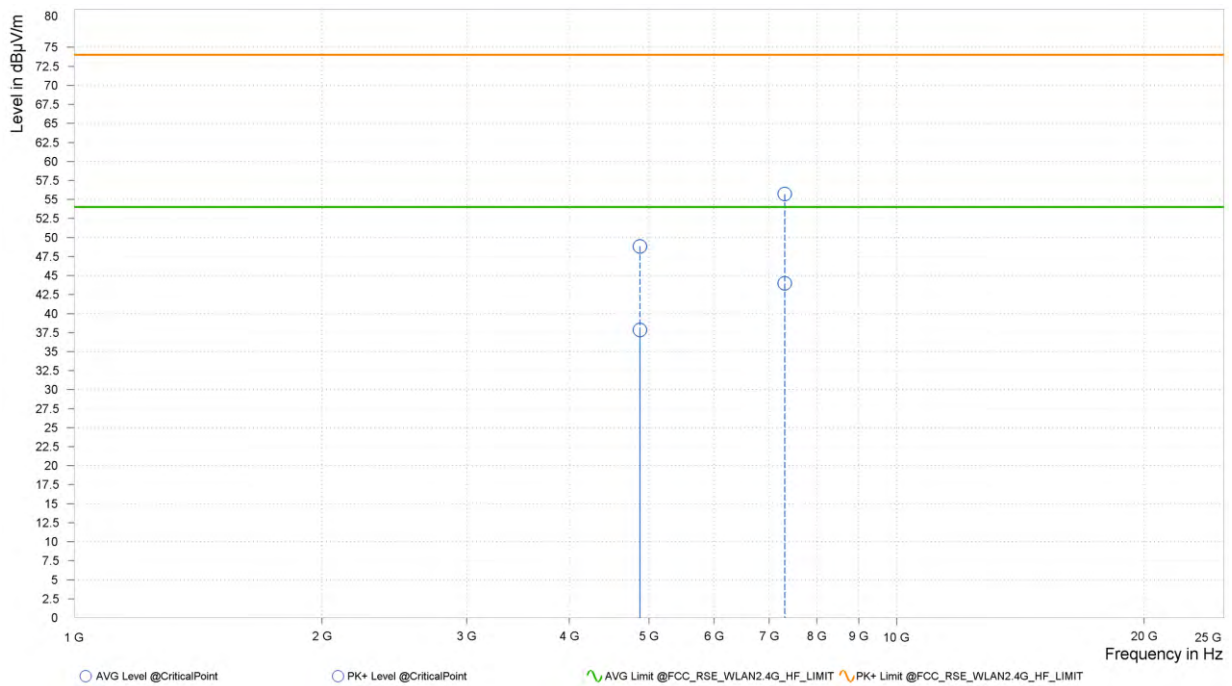




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.37	74.00	24.63	38.00	54.00	16.00	13.53	V	359	2.00
2	7,311.000	54.09	74.00	19.91	43.64	54.00	10.36	18.89	V	358	1.00

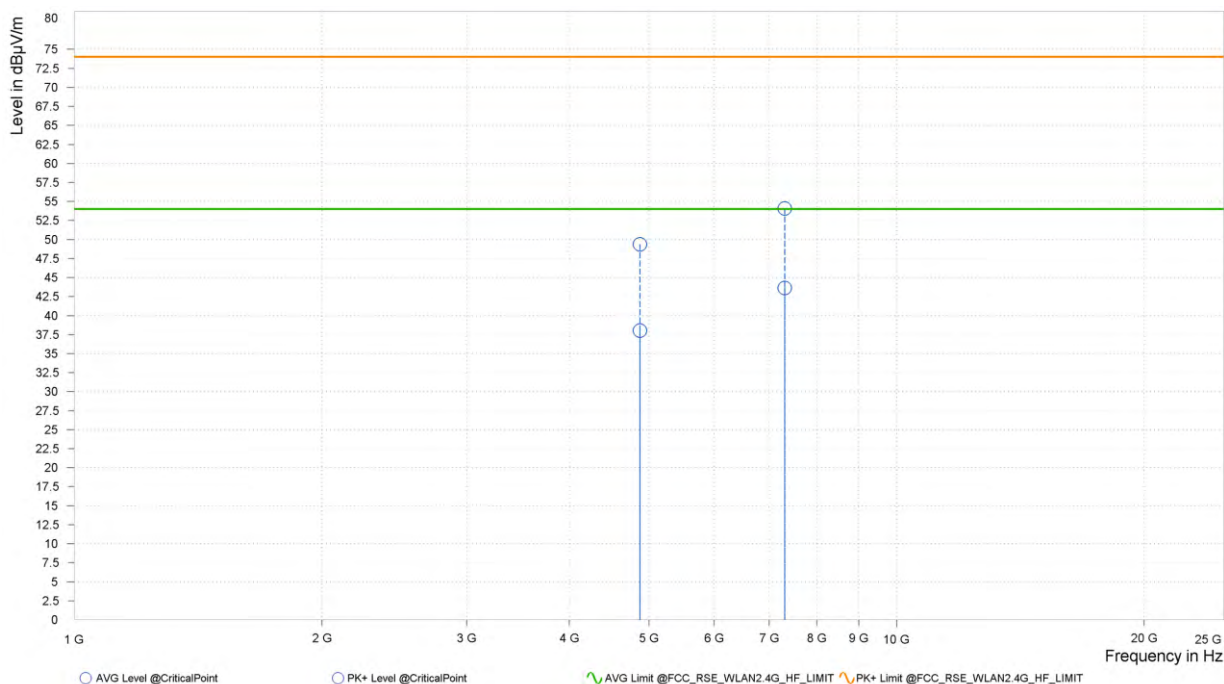

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2412MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.520	96.02			-0.91	H	200.3	2.00
2	2,483.500	44.12	74.00	29.88	-0.87	H	315.1	2.00
2	2,495.440	47.07	74.00	26.93	-0.83	H	195.6	1.00

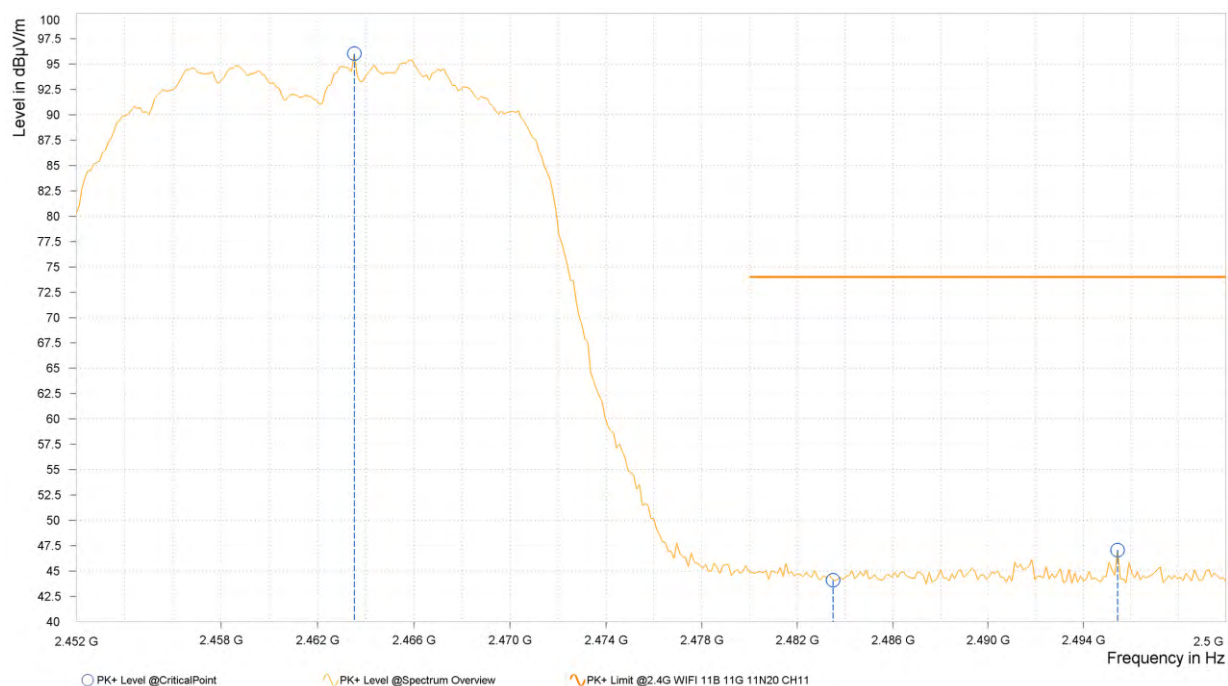




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,464.840	81.45			-0.92	H	209.8	2.00
2	2,483.500	30.74	54.00	23.26	-0.87	H	1.4	2.00
2	2,484.280	30.80	54.00	23.20	-0.87	H	0.9	2.00

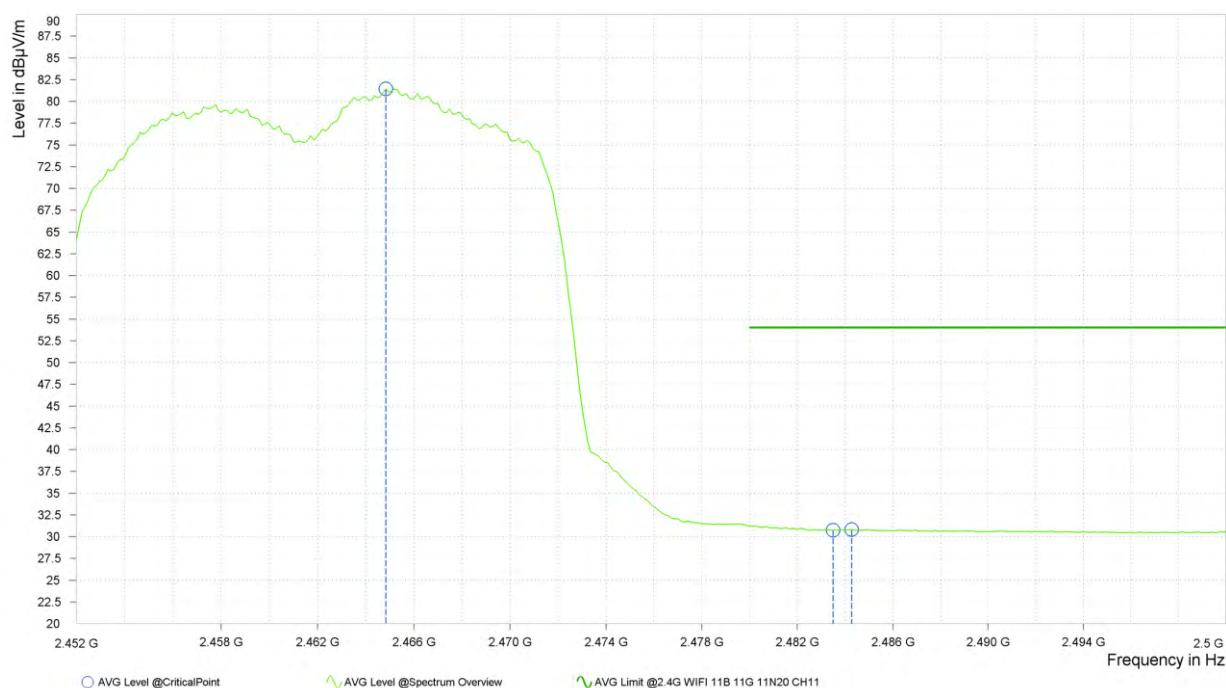




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,463.520	87.43			-0.91	V	359	2.00
2	2,483.500	33.45	54.00	20.55	-0.87	V	0.9	2.00
2	2,484.160	33.41	54.00	20.59	-0.87	V	0.9	2.00

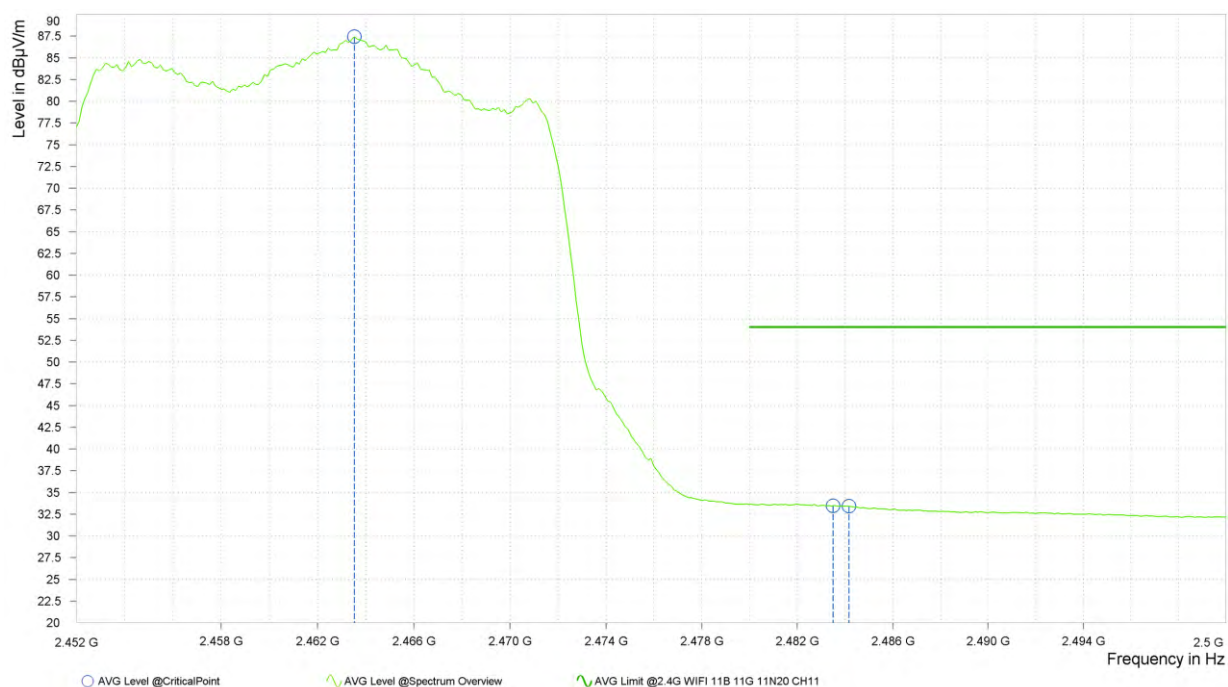




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,462.800	105.62			-0.91	V	359	2.00
2	2,483.500	47.57	74.00	26.43	-0.87	V	0.9	2.00
2	2,485.000	47.72	74.00	26.28	-0.86	V	359.1	1.00

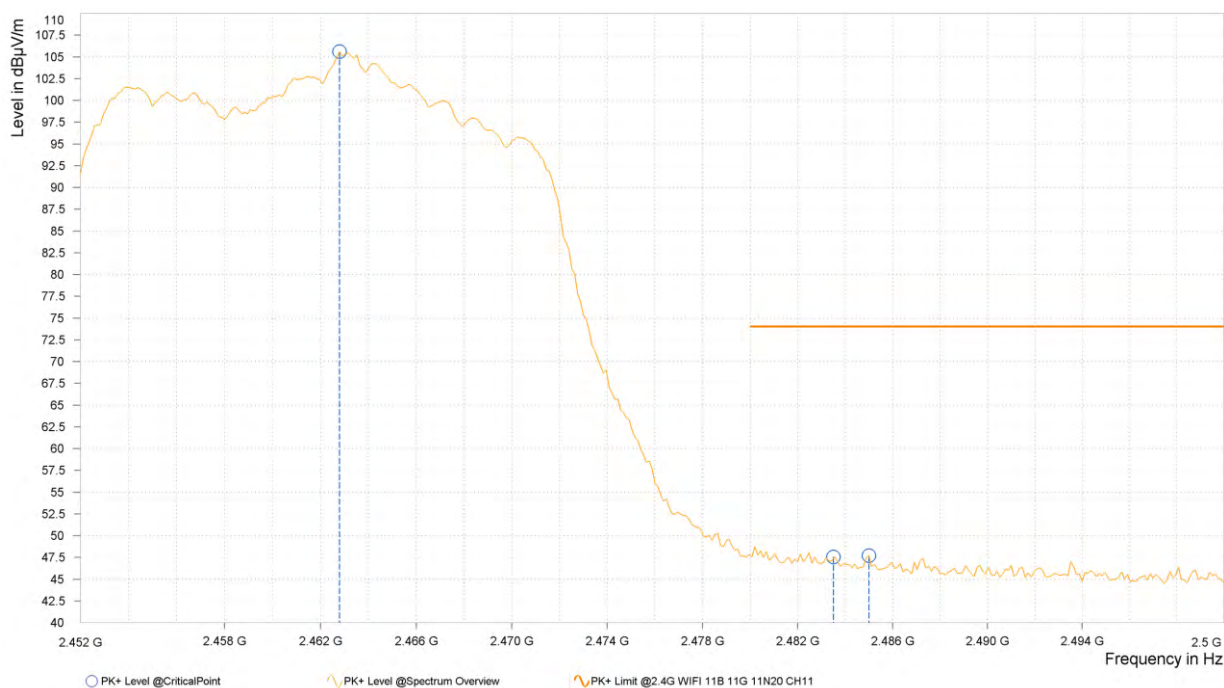

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2.412MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,390.000	47.33	74.00	26.67	-1.08	H	213.4	2.00
3	2,389.650	45.28	74.00	28.72	-1.05	H	359	1.00
3	2,416.313	92.95			-0.84	H	16.3	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,385.938	32.82	54.00	21.18	-1.08	H	214.6	2.00
3	2,390.000	32.62	54.00	21.38	-1.04	H	214.6	2.00
3	2,417.325	74.54			-0.84	H	15.6	2.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,385.938	49.28	74.00	24.72	-1.08	V	359	1.00
3	2,390.000	51.35	74.00	22.65	-1.05	V	5.8	2.00
3	2,423.400	101.97			-0.84	V	359	1.00

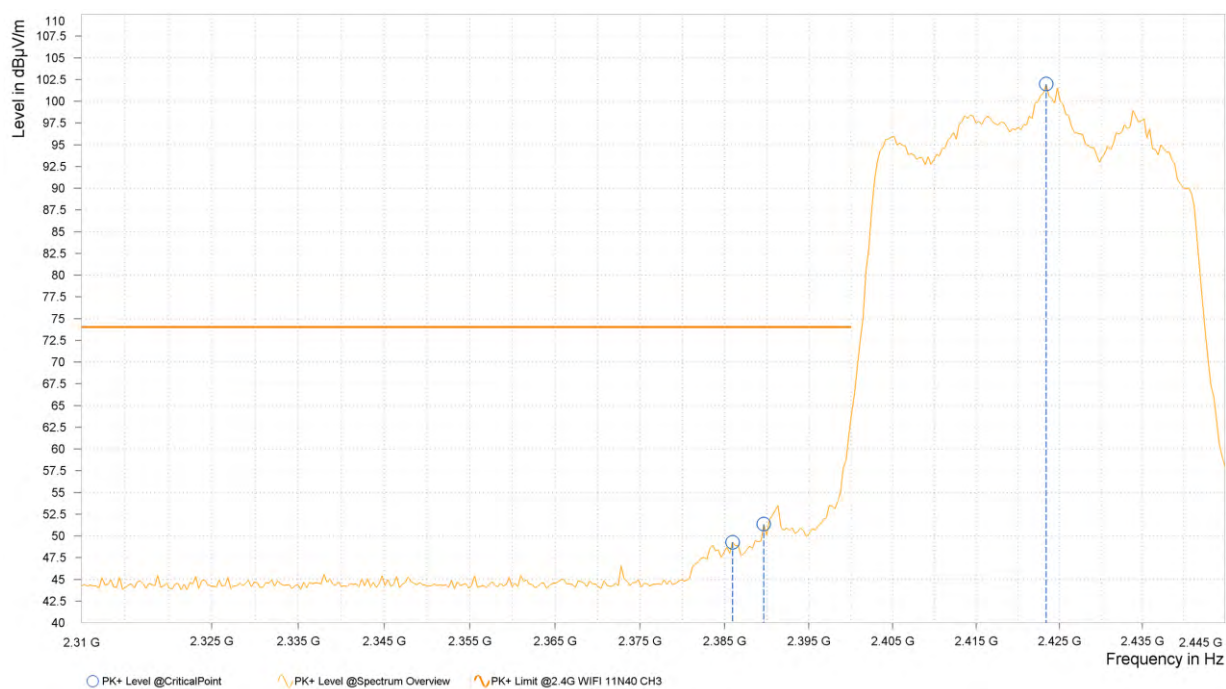



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,389.313	35.18	54.00	18.82	-1.05	V	359	1.00
3	2,390.325	35.98	54.00	18.02	-1.05	V	359	1.00
3	2,423.738	81.96			-0.84	V	358.3	1.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2422MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.18	74.00	24.82	38.11	54.00	15.89	13.53	H	359	2.00
2	7,311.000	54.64	74.00	19.36	43.56	54.00	10.44	18.89	H	1	1.00

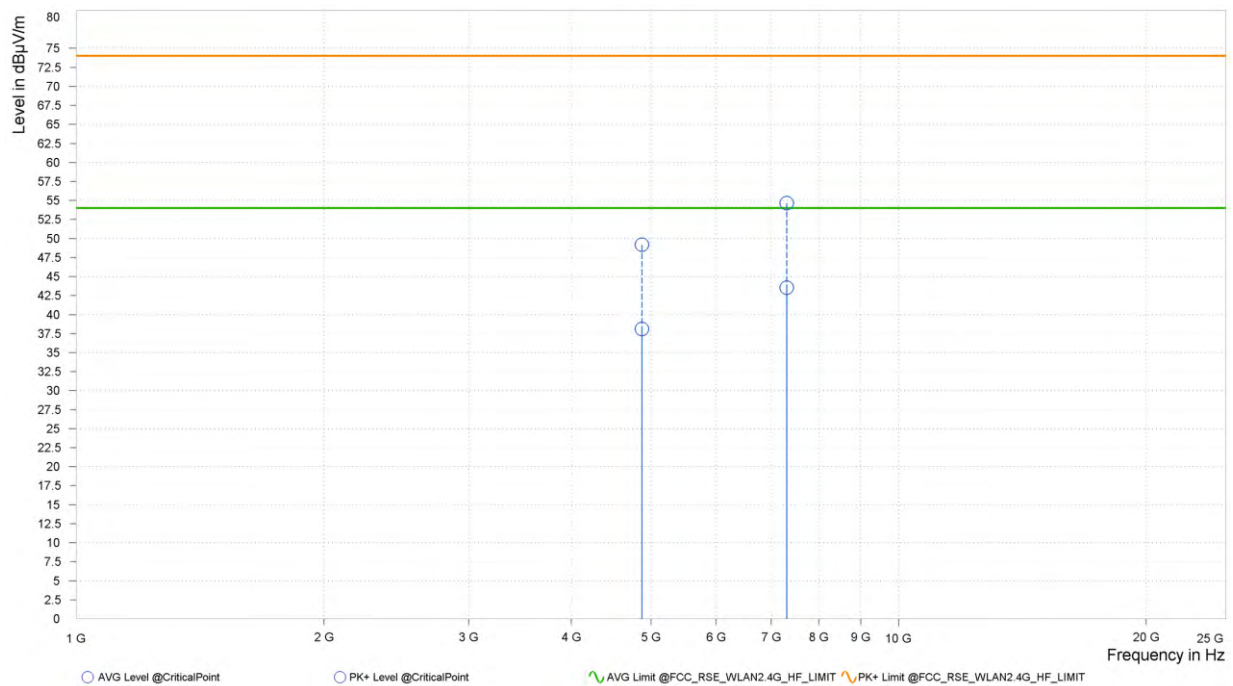




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,874.000	49.38	74.00	24.62	37.85	54.00	16.15	13.53	V	0.9	2.00
2	7,311.000	53.84	74.00	20.16	43.69	54.00	10.31	18.89	V	359	2.00

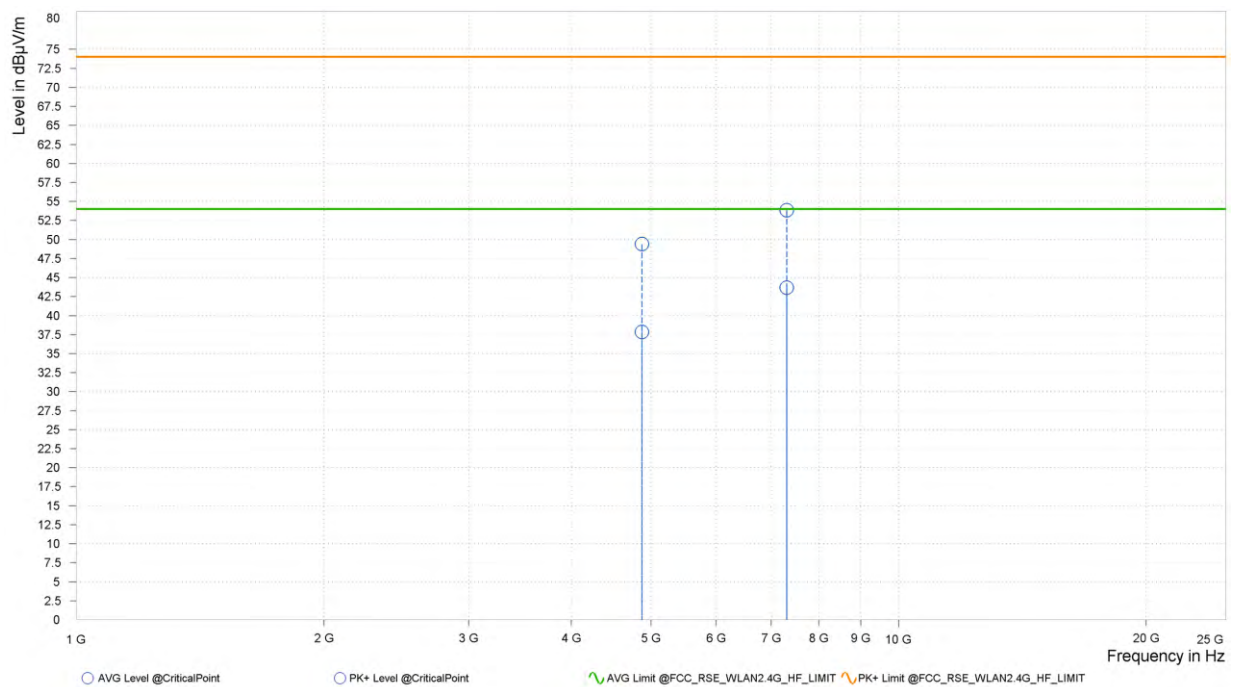

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2437MHz: Fundamental frequency.



BUREAU
VERITAS


Test Report No.: PSU-NQN2403180115RF02

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,446.620	93.92			-0.85	H	0.9	2.00
4	2,483.500	45.18	74.00	28.82	-0.87	H	359.1	1.00
4	2,484.700	46.42	74.00	27.58	-0.86	H	0.9	2.00

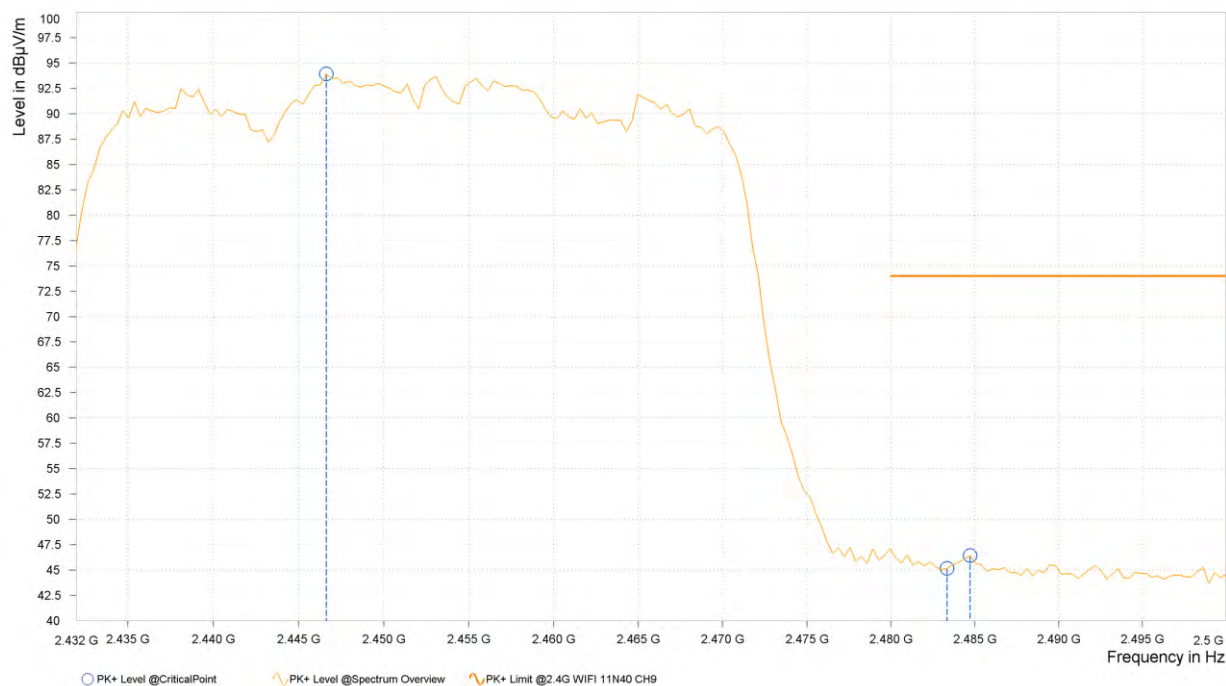




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,449.000	80.40			-0.85	H	346.6	1.00
4	2,483.500	32.04	54.00	21.96	-0.87	H	45	1.00
4	2,484.360	31.98	54.00	22.02	-0.87	H	146.6	1.00

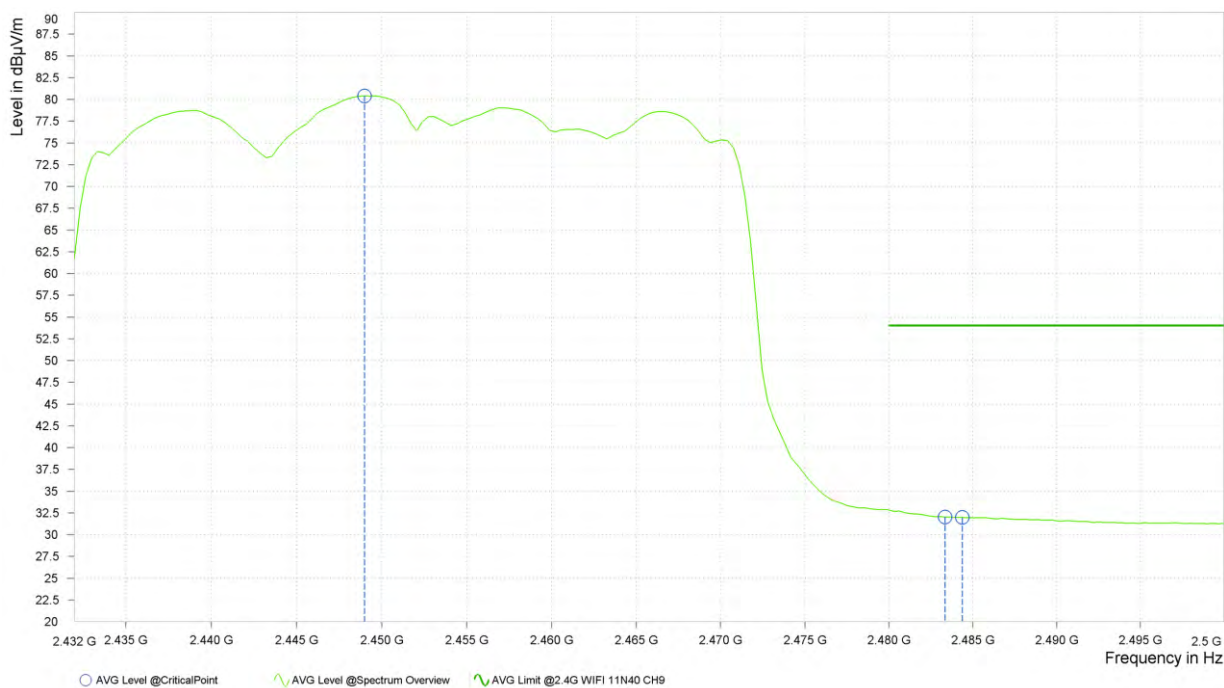



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,454.100	88.21			-0.87	V	314	2.00
4	2,483.500	35.69	54.00	18.31	-0.87	V	263.7	2.00
4	2,484.020	35.49	54.00	18.51	-0.87	V	263.7	2.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,452.740	101.82			-0.86	V	312.8	2.00
4	2,483.500	49.54	74.00	24.46	-0.87	V	261.3	2.00
4	2,487.760	49.66	74.00	24.34	-0.86	V	261.3	2.00

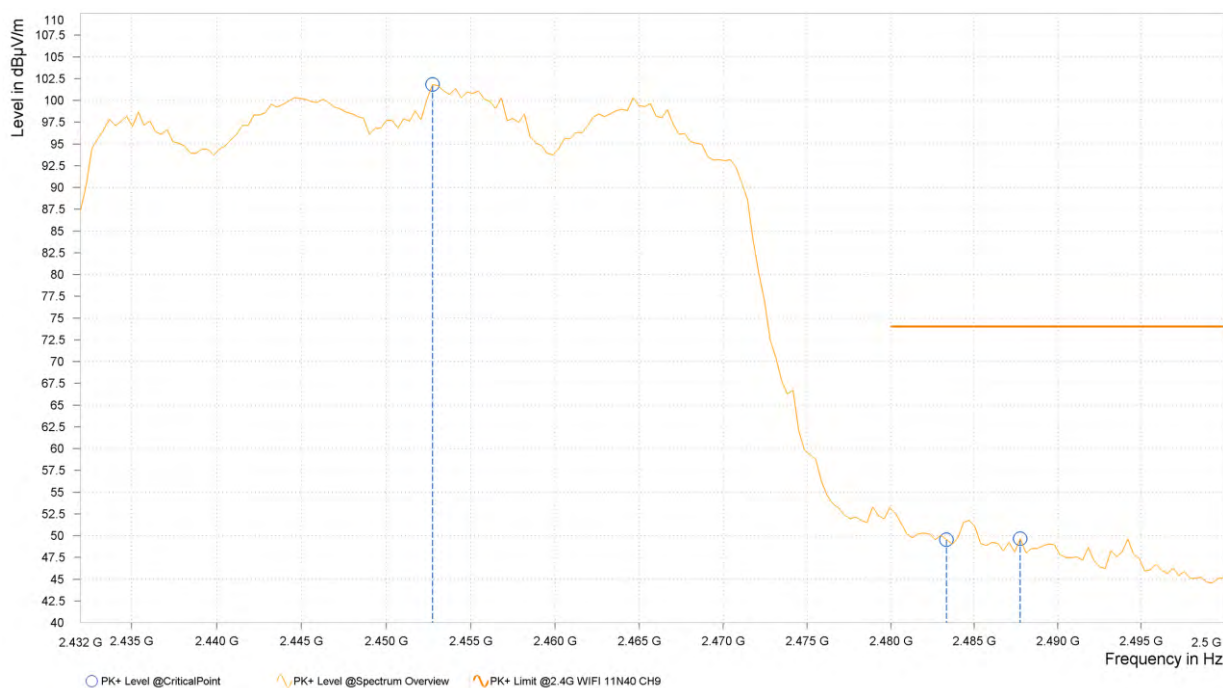

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2422MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

CHAIN 0:

BT-LE_2M


CHANNEL	TX Channel 19	ODETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	48.430	30.09	40.00	9.91	-3.56	H	359.1	1.00	120.000
1	95.669	33.66	43.50	9.84	-6.71	H	210.1	2.00	120.000
1	142.326	31.98	43.50	11.52	-9.34	H	355.1	2.00	120.000
1	240.054	37.70	46.00	8.30	-3.14	H	216.8	1.00	120.000
1	359.946	29.66	46.00	16.34	0.97	H	216.8	1.00	120.000
1	608.751	28.17	46.00	17.83	3.04	H	0.9	2.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

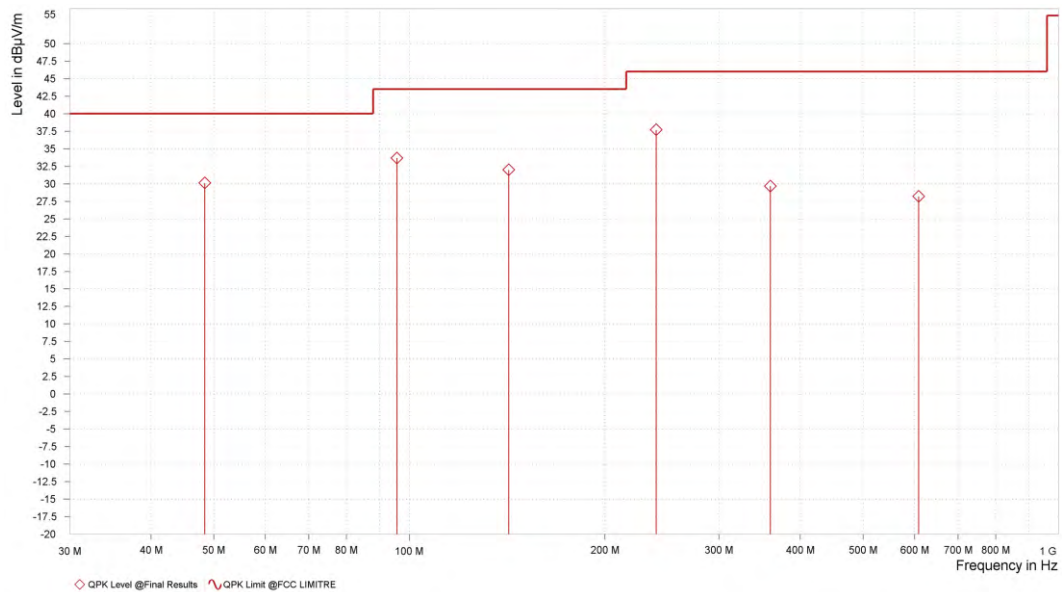



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02


CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	34.220	36.11	40.00	3.89	-8.35	V	359.1	1.00	120.000
1	78.743	24.60	40.00	15.40	-11.22	V	60.7	2.00	120.000
1	140.774	26.20	43.50	17.30	-8.84	V	359	2.00	120.000
1	235.931	33.22	46.00	12.78	-3.93	V	1	2.00	120.000
1	484.785	33.21	46.00	12.79	2.30	V	1	1.00	120.000
1	786.018	29.59	46.00	16.41	4.89	V	211.4	2.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

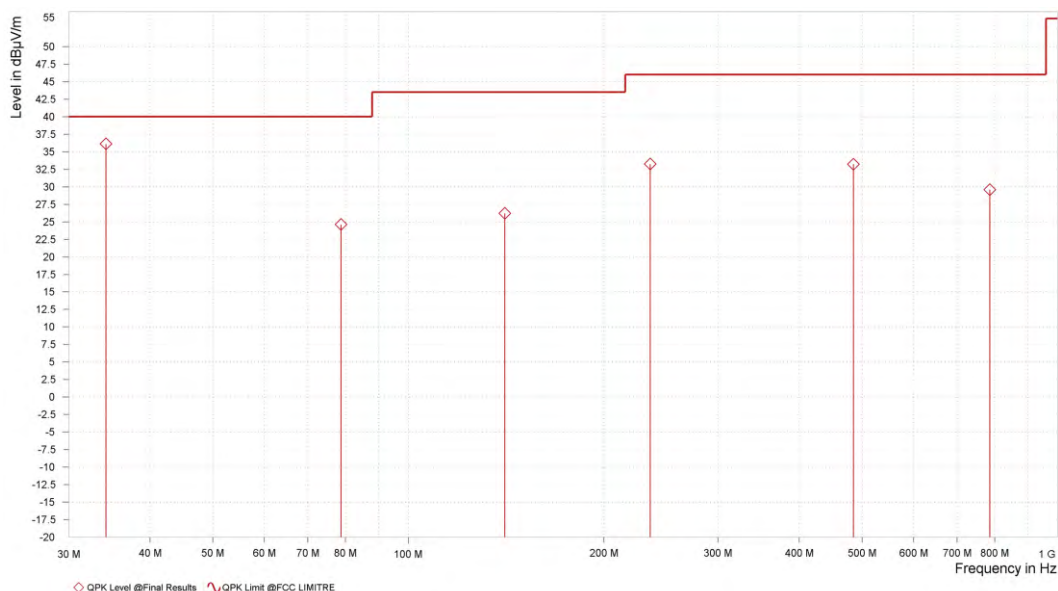



**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ABOVE 1GHz TEST DATA

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

CHAIN 0:

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,366.000	46.21	74.00	27.79	-1.21	H	359.1	1.00
5	2,390.000	44.38	74.00	29.62	-1.05	H	202.6	1.00
5	2,402.500	94.28			-0.95	H	306.7	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,385.000	34.89	54.00	19.11	-1.09	H	264.8	2.00
5	2,390.000	34.79	54.00	19.21	-1.05	H	43.7	1.00
5	2,402.000	81.41			-0.96	H	214.6	2.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,358.000	50.77	74.00	23.23	-1.24	V	1	1.00
5	2,390.000	49.48	74.00	24.52	-1.05	V	359	2.00
5	2,403.000	90.91			-0.95	V	268.5	2.00

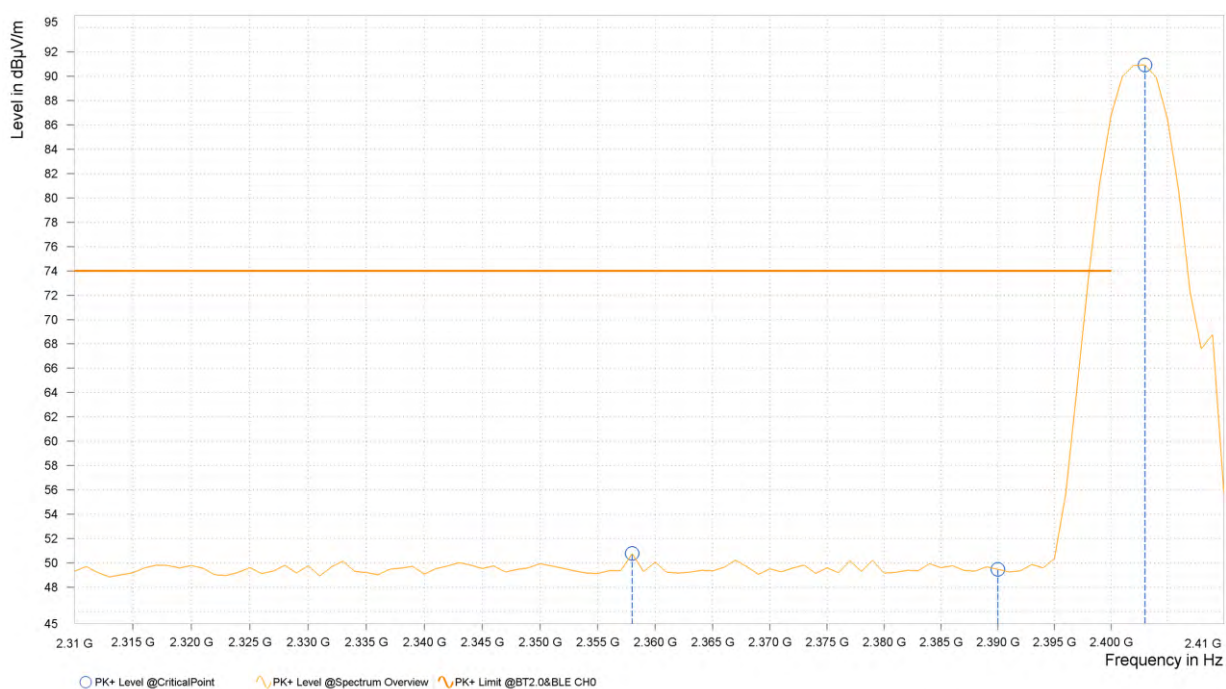



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,384.000	34.89	54.00	19.11	-1.09	V	214.6	2.00
5	2,390.000	34.81	54.00	19.19	-1.05	V	142.9	1.00
5	2,402.000	87.94			-0.96	V	193.1	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
2. 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	50.36	74.00	23.64	38.40	54.00	15.60	13.54	H	359	2.00
2	7,320.000	55.09	74.00	18.91	43.96	54.00	10.04	18.90	H	359	1.00

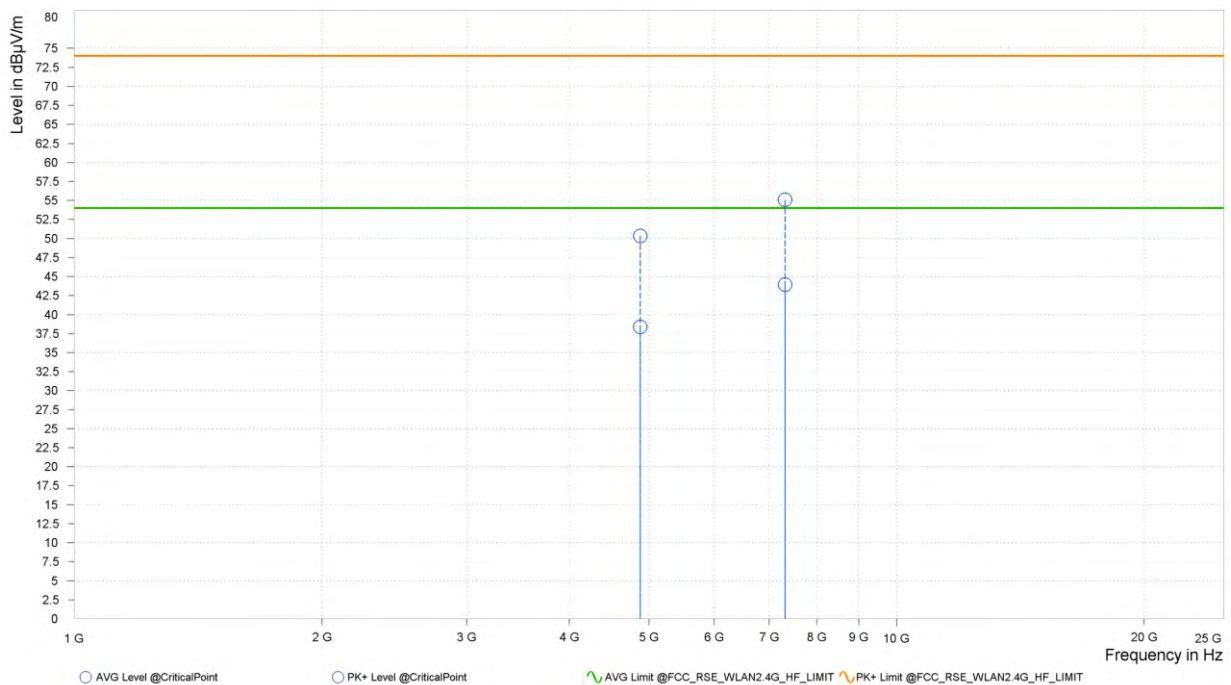




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.91	74.00	24.09	38.48	54.00	15.52	13.54	V	32	2.00
2	7,320.000	55.19	74.00	18.81	44.05	54.00	9.95	18.90	V	32	2.00

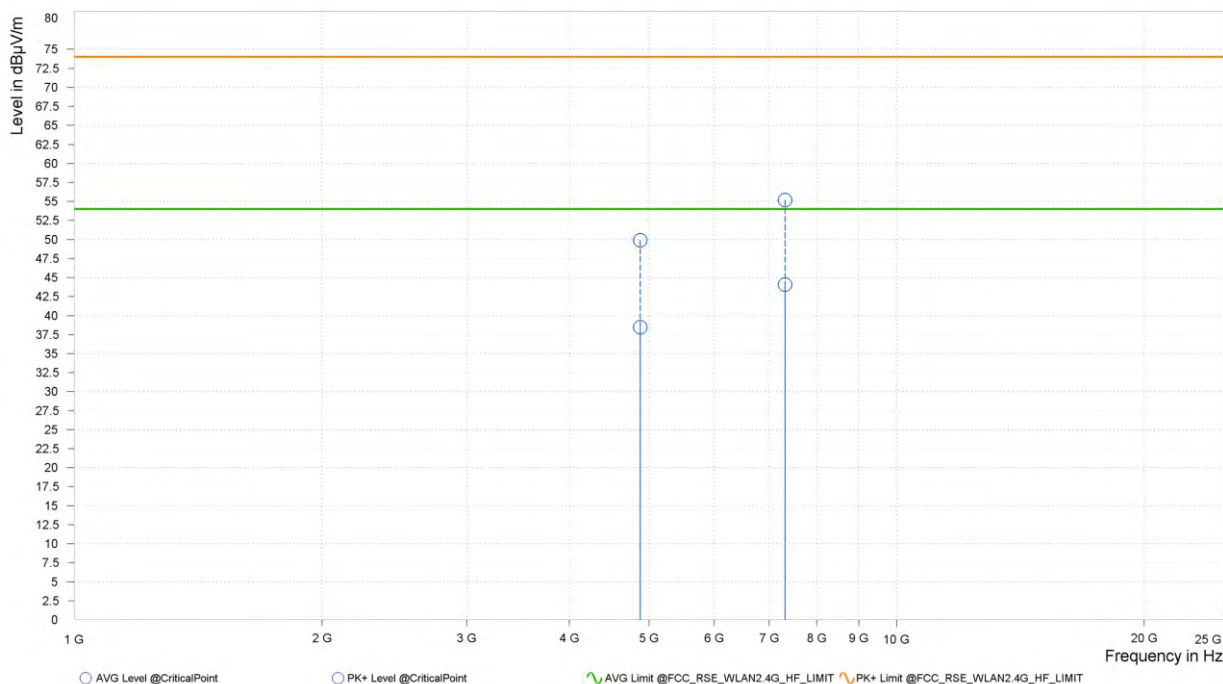

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	81.25			-0.88	H	68.9	2.00
6	2,483.500	45.15	74.00	28.85	-0.87	H	95.3	1.00
6	2,483.720	45.63	74.00	28.37	-0.87	H	359.1	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	78.69			-0.88	H	215.8	2.00
6	2,483.500	31.04	54.00	22.96	-0.87	H	359.1	1.00
6	2,498.900	31.07	54.00	22.93	-0.82	H	215.8	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.200	92.65			-0.88	V	358.4	1.00
6	2,483.500	54.07	74.00	19.93	-0.87	V	218.2	2.00
6	2,483.720	54.13	74.00	19.87	-0.87	V	218.2	2.00






BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	90.23			-0.88	V	195.5	1.00
6	2,483.500	43.37	54.00	10.63	-0.87	V	0.9	2.00
6	2,483.720	44.08	54.00	9.92	-0.87	V	0.9	2.00

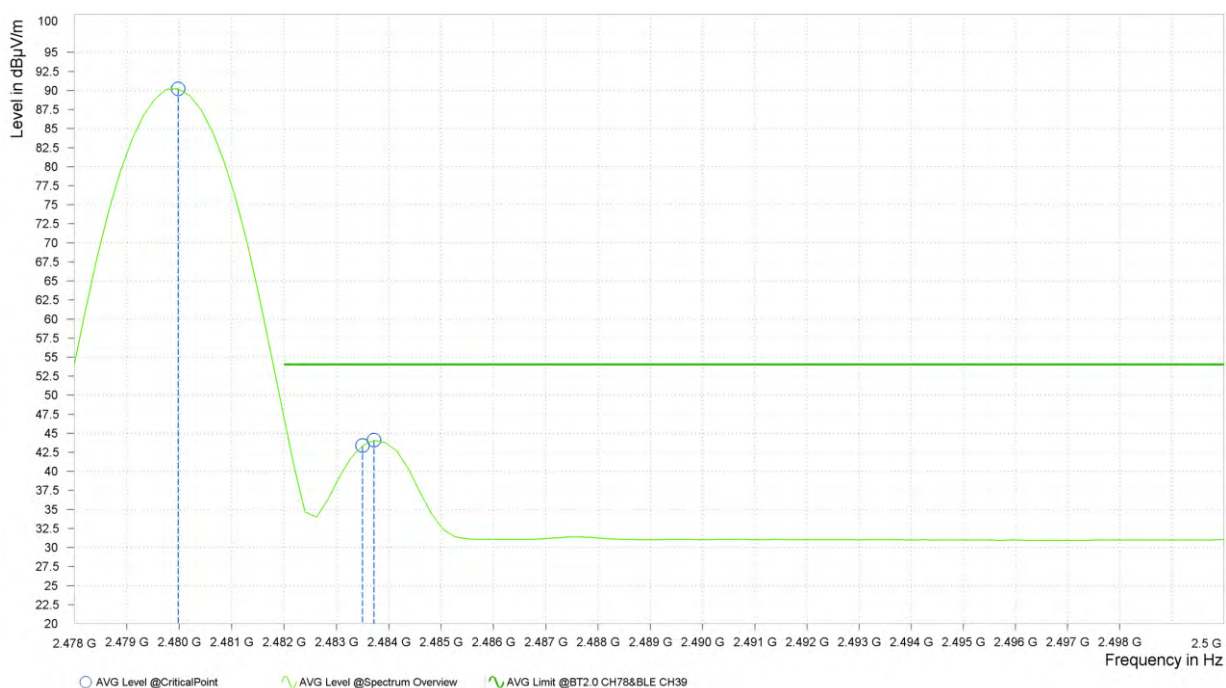

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2480MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

BT-LE_2M

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,379.000	50.39	74.00	23.61	-1.13	H	92.9	1.00
5	2,390.000	48.99	74.00	25.01	-1.05	H	317.5	2.00
5	2,404.000	86.69			-0.94	H	215.8	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,386.000	34.89	54.00	19.11	-1.08	H	264.9	2.00
5	2,390.000	34.82	54.00	19.18	-1.05	H	44.9	1.00
5	2,404.000	73.03			-0.94	H	214.6	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,370.000	50.34	74.00	23.66	-1.20	V	49.7	1.00
5	2,390.000	49.31	74.00	24.69	-1.05	V	101.1	2.00
5	2,405.000	93.50			-0.93	V	150.1	1.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,382.000	34.94	54.00	19.06	-1.11	V	214.7	2.00
5	2,390.000	34.83	54.00	19.17	-1.05	V	214.7	2.00
5	2,405.000	79.79			-0.93	V	199.1	1.00



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2404MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	50.17	74.00	23.83	38.26	54.00	15.74	13.54	H	31.9	2.00
2	7,320.000	56.06	74.00	17.94	44.17	54.00	9.83	18.90	H	271	2.00

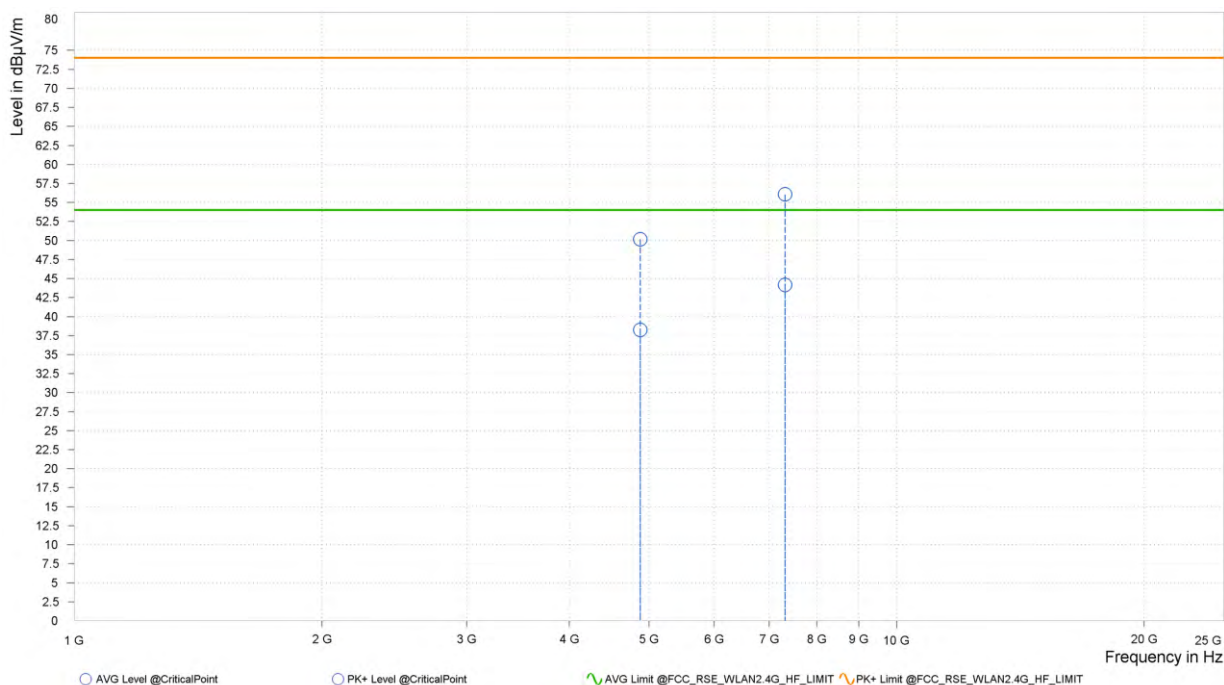




**BUREAU
VERITAS**

Test Report No.: PSU-NQN2403180115RF02

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,880.000	49.50	74.00	24.50	38.21	54.00	15.79	13.54	V	1	2.00
2	7,320.000	55.08	74.00	18.92	44.13	54.00	9.87	18.90	V	1	1.00

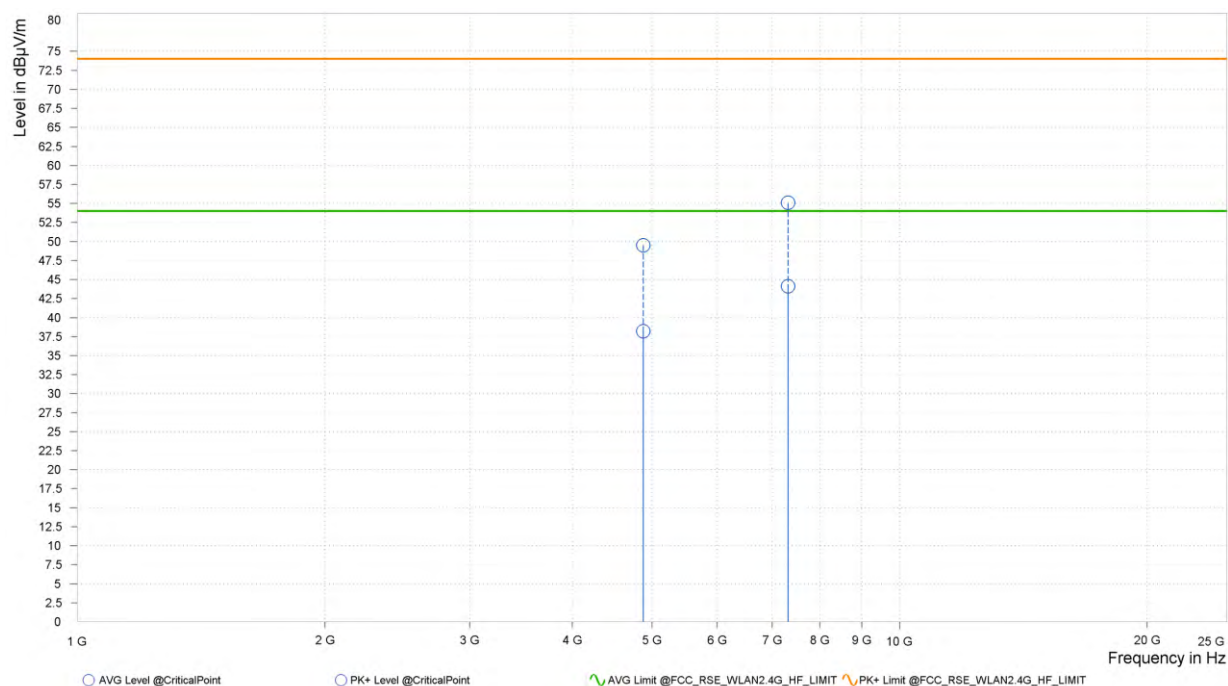

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value–Emission level.
- 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.500	85.36			-0.88	H	217	2.00
6	2,483.500	44.18	74.00	29.82	-0.87	H	0.9	2.00
6	2,498.000	47.03	74.00	26.97	-0.83	H	217	2.00





BUREAU
VERITAS

Test Report No.: PSU-NQN2403180115RF02

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,478.000	79.66			-0.88	H	215.9	2.00
6	2,483.500	31.00	54.00	23.00	-0.87	H	94	1.00
6	2,485.750	31.04	54.00	22.96	-0.86	H	215.9	2.00

