

## EXHIBIT E- RADIATED SPURIOUS EMISSION DATA

### 1 WCDMA Band II

#### 1.1 WCDMA Band II MCH

### Test result

Project Number: Certification

Test Time: 2023-09-16\_10.58.09

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE FCC PART22&24&27 FCC PART 24\_1900\_GSM 1900&WCDMA B2&CDMA BC1&LTE B2

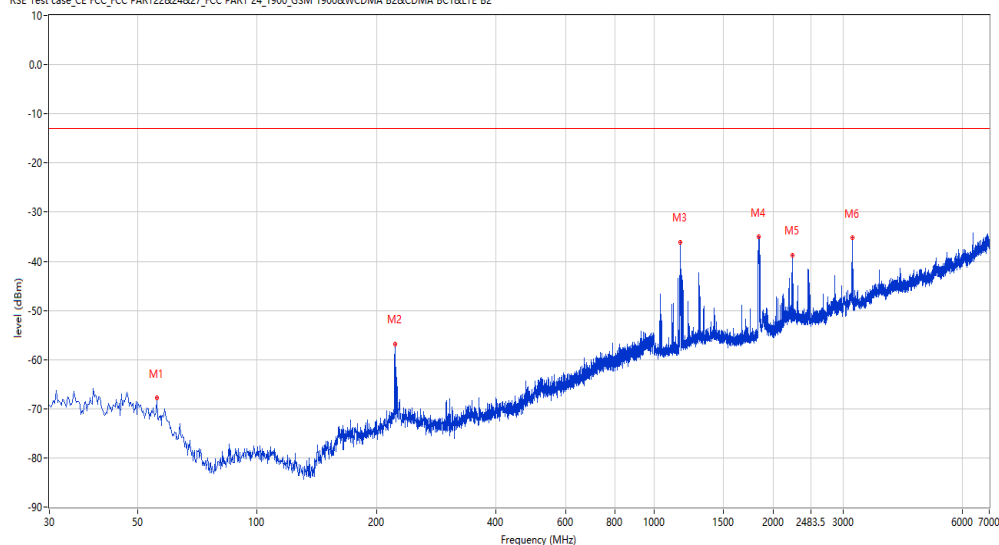

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT        | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|------------|----------|---------|
| 55.947          | -67.87       | -12.65      | -13.0       | 54.87       | 136.90    | Horizontal | Vertical | Pass    |
| 222.788         | -56.80       | -11.84      | -13.0       | 43.80       | 0.00      | Horizontal | Vertical | Pass    |
| 1166.000        | -36.05       | -1.87       | -13.0       | 23.05       | 359.70    | Horizontal | Vertical | Pass    |
| 1841.500        | -35.05       | 2.47        | -13.0       | 22.05       | 158.00    | Horizontal | Vertical | Pass    |
| 2232.000        | -38.76       | 4.02        | -13.0       | 25.76       | 0.00      | Horizontal | Vertical | Pass    |
| 3164.000        | -35.25       | 9.35        | -13.0       | 22.25       | 106.00    | Horizontal | Vertical | Pass    |

# Test result

Project Number: Certification

Test Time: 2023-09-16\_11.31.41

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE FCC\_PART22&24&27\_FCC GSM&CDMA&LTE&WCDMA 7-18G

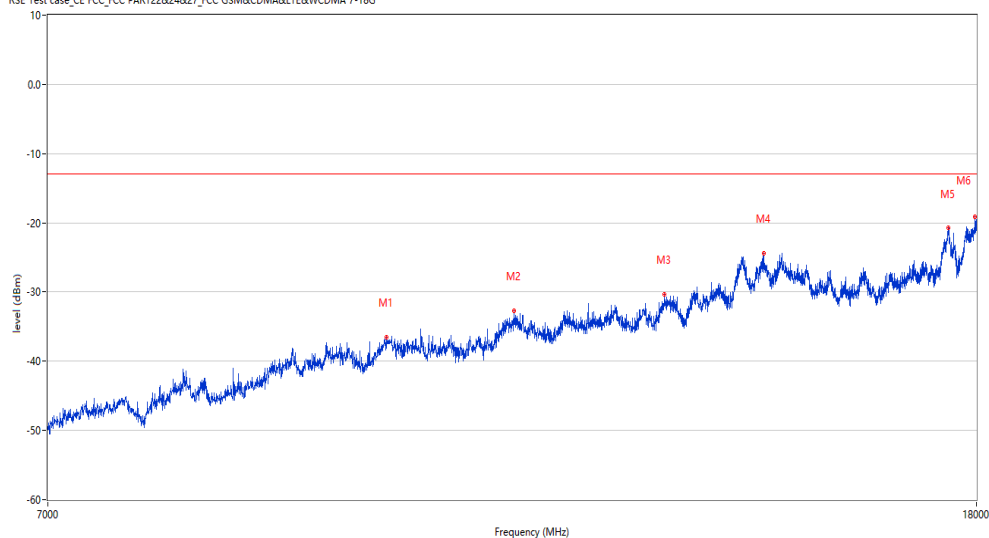

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT        | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|------------|----------|---------|
| 9879.250        | -36.54       | 29.46       | -13.0       | 23.54       | 88.90     | Horizontal | Vertical | Pass    |
| 11243.250       | -32.68       | 31.52       | -13.0       | 19.68       | 28.20     | Horizontal | Vertical | Pass    |
| 13105.000       | -30.39       | 34.46       | -13.0       | 17.39       | 8.10      | Horizontal | Vertical | Pass    |
| 14496.500       | -24.45       | 38.69       | -13.0       | 11.45       | 182.70    | Horizontal | Vertical | Pass    |
| 17488.501       | -20.66       | 43.14       | -13.0       | 7.66        | 1.60      | Horizontal | Vertical | Pass    |
| 17977.999       | -19.19       | 45.24       | -13.0       | 6.19        | 154.40    | Horizontal | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.02.02

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.1

Hum.: 52%

Test Engineer: LYG


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE FCC\_FCC PART22&24&27\_FCC PART 24\_1900\_GSM 1900&WCDMA B2&CDMA BC1&LTE B2

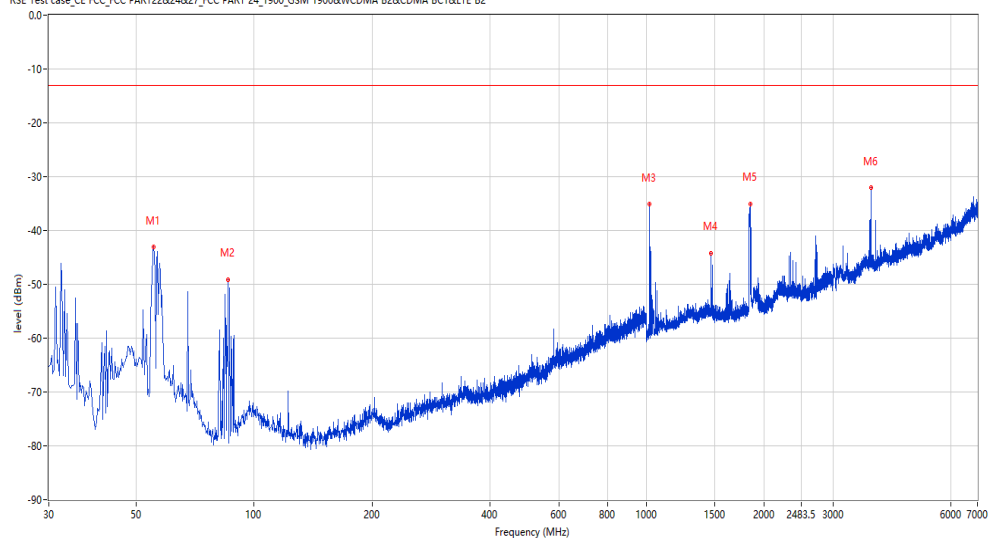

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT      | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|----------|----------|---------|
| 55.462          | -43.11       | -16.17      | -13.0       | 30.11       | 145.70    | Vertical | Vertical | Pass    |
| 86.018          | -49.14       | -18.95      | -13.0       | 36.14       | 72.40     | Vertical | Vertical | Pass    |
| 1018.500        | -35.07       | -3.15       | -13.0       | 22.07       | 72.10     | Vertical | Vertical | Pass    |
| 1464.000        | -44.24       | -0.24       | -13.0       | 31.24       | 232.90    | Vertical | Vertical | Pass    |
| 1842.000        | -35.00       | 3.45        | -13.0       | 22.00       | 167.00    | Vertical | Vertical | Pass    |
| 3743.000        | -32.09       | 11.49       | -13.0       | 19.09       | 266.30    | Vertical | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.33.05

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.1

Hum.: 52%

Test Engineer: LYG


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE FCC\_PART22&24&27\_FCC GSM&CDMA&LTE&WCDMA 7-18G

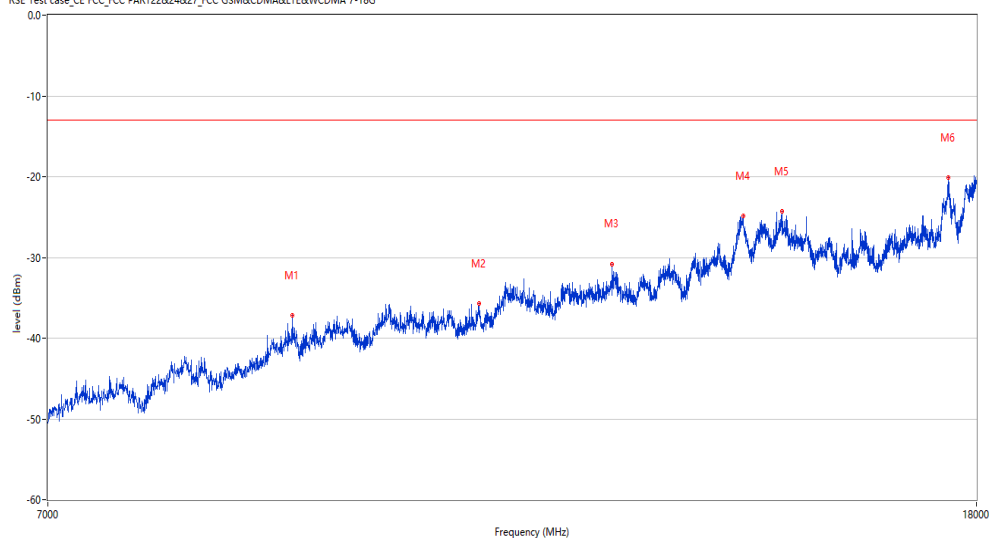

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT      | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|----------|----------|---------|
| 8974.500        | -37.16       | 28.59       | -13.0       | 24.16       | 203.60    | Vertical | Vertical | Pass    |
| 10852.750       | -35.74       | 29.84       | -13.0       | 22.74       | 234.90    | Vertical | Vertical | Pass    |
| 12428.500       | -30.82       | 32.51       | -13.0       | 17.82       | 38.40     | Vertical | Vertical | Pass    |
| 14196.750       | -24.82       | 40.06       | -13.0       | 11.82       | 100.90    | Vertical | Vertical | Pass    |
| 14766.000       | -24.34       | 39.82       | -13.0       | 11.34       | 38.40     | Vertical | Vertical | Pass    |
| 17494.000       | -20.07       | 43.23       | -13.0       | 7.07        | 276.10    | Vertical | Vertical | Pass    |

## 2 WCDMA Band IV

### 2.1 WCDMA Band IV MCH

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.12.15

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.1

Hum.: 52%

Test Engineer: LYG


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE FCC\_FCC PART22&24&27\_FCC PART 27\_1700\_WCDMA B4&LTE B4&B66

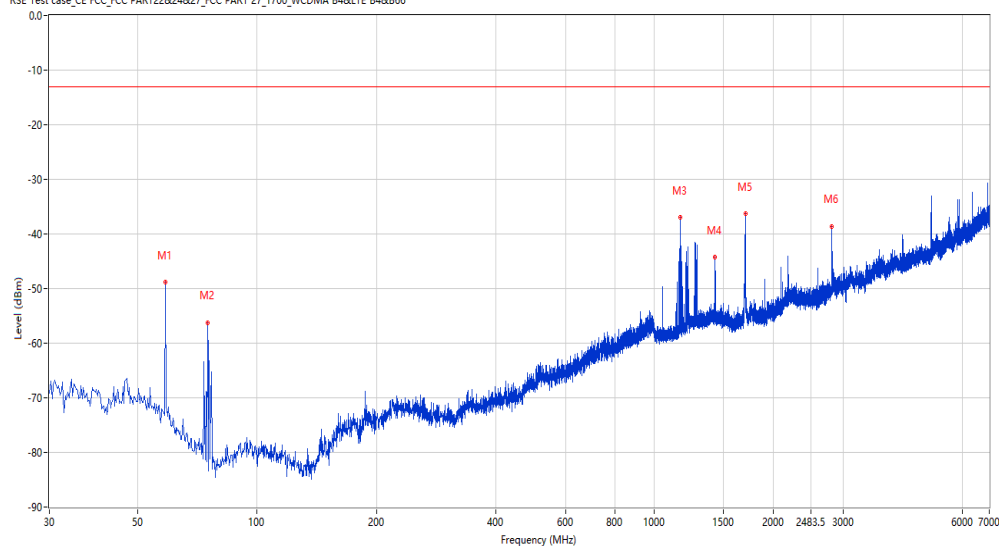

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT        | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|------------|----------|---------|
| 58.858          | -48.83       | -14.55      | -13.0       | 35.83       | 0.00      | Horizontal | Vertical | Pass    |
| 75.105          | -56.20       | -21.83      | -13.0       | 43.20       | 135.50    | Horizontal | Vertical | Pass    |
| 1166.500        | -37.00       | -1.64       | -13.0       | 24.00       | 248.10    | Horizontal | Vertical | Pass    |
| 1425.750        | -44.29       | 0.16        | -13.0       | 31.29       | 13.00     | Horizontal | Vertical | Pass    |
| 1702.750        | -36.27       | 1.85        | -13.0       | 23.27       | 352.60    | Horizontal | Vertical | Pass    |
| 2808.750        | -38.57       | 6.79        | -13.0       | 25.57       | 357.50    | Horizontal | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.30.09

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX

Temp.(oC): 25.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE\_FCC\_FCC PART22&24&27\_FCC GSM&CDMA&LTE&WCDMA 7-18G



| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT        | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|------------|----------|---------|
| 9901.250        | -34.96       | 29.92       | -13.0       | 21.96       | 357.10    | Horizontal | Vertical | Pass    |
| 11864.750       | -32.07       | 32.17       | -13.0       | 19.07       | 360.00    | Horizontal | Vertical | Pass    |
| 13880.500       | -28.55       | 35.49       | -13.0       | 15.55       | 338.20    | Horizontal | Vertical | Pass    |
| 14749.500       | -24.71       | 39.81       | -13.0       | 11.71       | 223.60    | Horizontal | Vertical | Pass    |
| 16055.750       | -26.73       | 35.77       | -13.0       | 13.73       | 234.00    | Horizontal | Vertical | Pass    |
| 17997.251       | -18.93       | 45.72       | -13.0       | 5.93        | 55.90     | Horizontal | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.08.26

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A


Work Addition: TX

Temp.(oC): 25.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-02#01

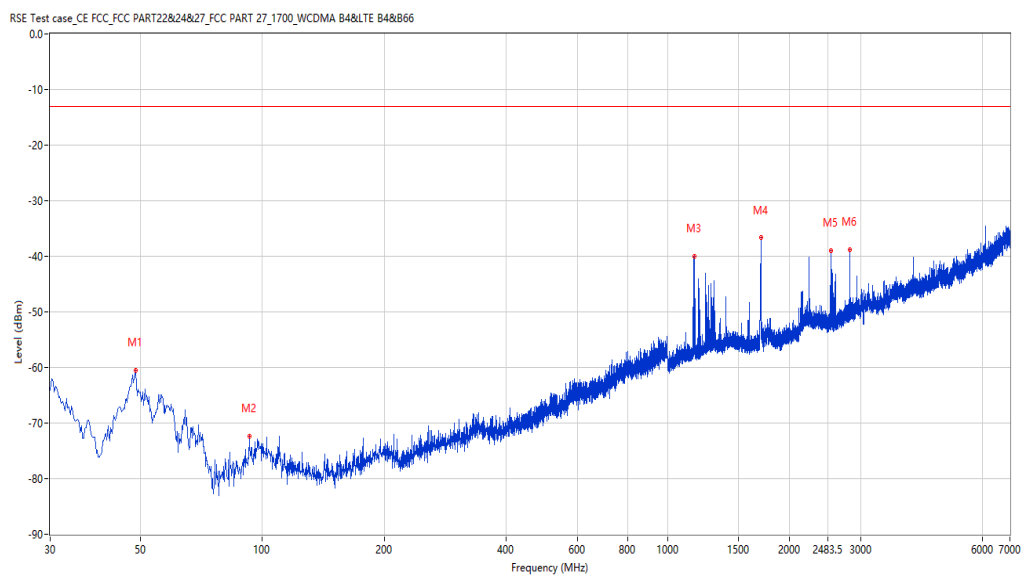

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT      | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|----------|----------|---------|
| 48.672          | -60.48       | -17.09      | -13.0       | 47.48       | 36.50     | Vertical | Vertical | Pass    |
| 93.050          | -72.30       | -15.63      | -13.0       | 59.30       | 360.00    | Vertical | Vertical | Pass    |
| 1166.000        | -39.98       | -1.71       | -13.0       | 26.98       | 64.90     | Vertical | Vertical | Pass    |
| 1703.000        | -36.69       | 1.51        | -13.0       | 23.69       | 0.80      | Vertical | Vertical | Pass    |
| 2530.500        | -38.93       | 4.12        | -13.0       | 25.93       | 213.80    | Vertical | Vertical | Pass    |
| 2819.750        | -38.79       | 6.39        | -13.0       | 25.79       | 295.70    | Vertical | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.26.34

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE FCC FCC PART22&24&27\_FCC GSM&CDMA&LTE&WCDMA 7-18G

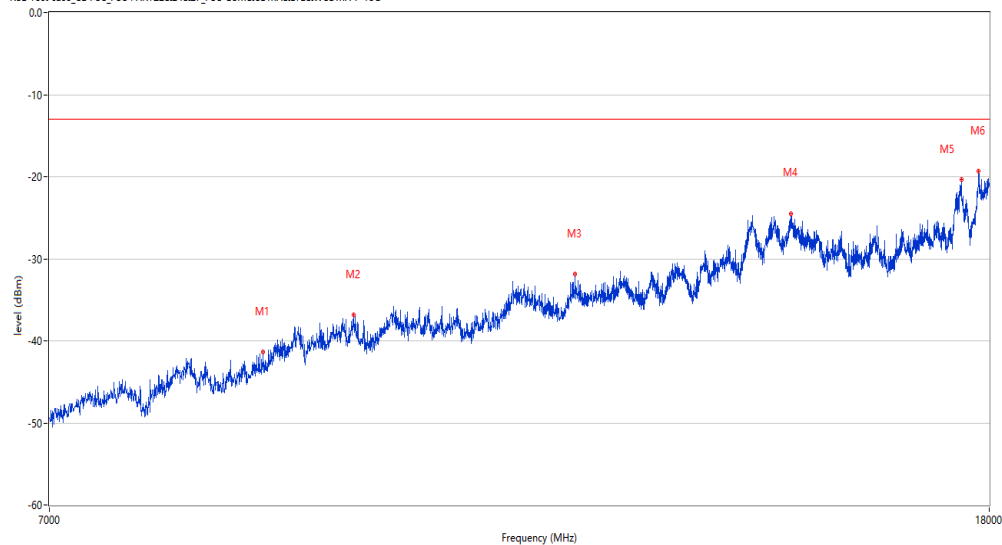

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT      | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|----------|----------|---------|
| 8677.500        | -41.36       | 24.99       | -13.0       | 28.36       | 224.00    | Vertical | Vertical | Pass    |
| 9502.500        | -36.85       | 28.54       | -13.0       | 23.85       | 14.60     | Vertical | Vertical | Pass    |
| 11875.750       | -31.90       | 32.15       | -13.0       | 18.90       | 68.50     | Vertical | Vertical | Pass    |
| 14752.250       | -24.46       | 39.83       | -13.0       | 11.46       | 360.00    | Vertical | Vertical | Pass    |
| 17504.999       | -20.31       | 43.00       | -13.0       | 7.31        | 14.60     | Vertical | Vertical | Pass    |
| 17813.000       | -19.33       | 42.10       | -13.0       | 6.33        | 224.00    | Vertical | Vertical | Pass    |



### 3 WCDMA Band V

#### 3.1 WCDMA Band V MCH

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.18.50

EUT Name: N.A

Manufacturer: N.A

Model: N.A

Temp.(oC): 25.1

Hum.: 52%

Test Engineer: LYG


Test Standard: FCC

Work Addition: TX

Load: Full load

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CCE FCC PART22&24&27\_FCC PART 22\_850\_GSM850&LTE B5&CDMA BC0&WCDMA B5&LTE B26

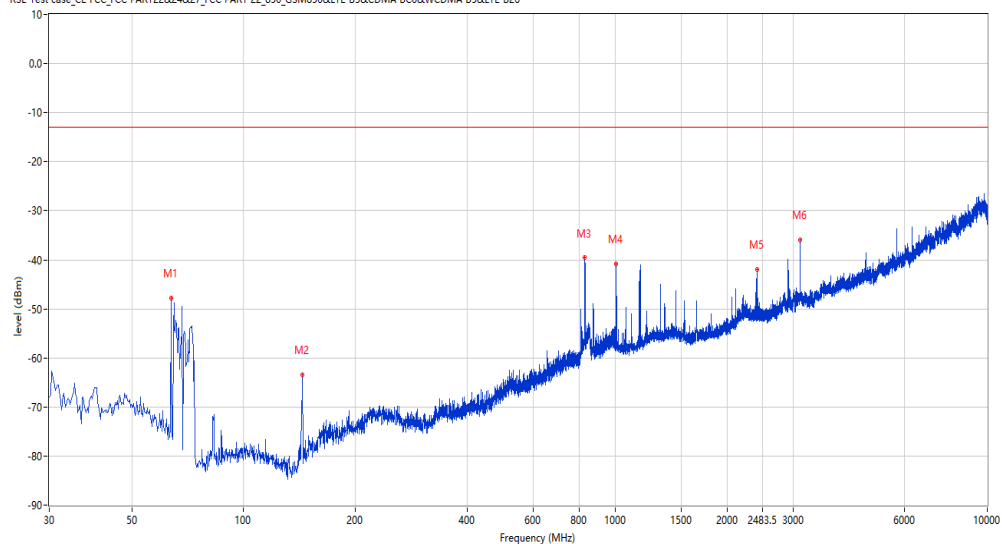

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT        | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|------------|----------|---------|
| 63.708          | -47.76       | -16.68      | -13.0       | 34.76       | 296.20    | Horizontal | Vertical | Pass    |
| 143.732         | -63.44       | -23.28      | -13.0       | 50.44       | 46.20     | Horizontal | Vertical | Pass    |
| 827.583         | -39.56       | 1.92        | -13.0       | 26.56       | 245.30    | Horizontal | Vertical | Pass    |
| 1006.000        | -40.78       | -2.29       | -13.0       | 27.78       | 0.00      | Horizontal | Vertical | Pass    |
| 2408.000        | -41.95       | 4.15        | -13.0       | 28.95       | 204.10    | Horizontal | Vertical | Pass    |
| 3135.000        | -35.93       | 9.24        | -13.0       | 22.93       | 360.00    | Horizontal | Vertical | Pass    |

## Test result

Project Number: Certification

Test Time: 2023-09-16\_11.22.25

EUT Name: N.A

Test Engineer: LYG

Manufacturer: N.A

Test Standard: FCC

Model: N.A

Work Addition: TX


Temp.(oC): 25.1

Load: Full load

Hum.: 52%

Remark: DR-RSE01-E23060106-02#01

RSE Test case\_CE FCC PART22&24&27\_FCC PART 22\_850\_GSM850&LTE B5&CDMA BC08&WCDMA B5&LTE B26

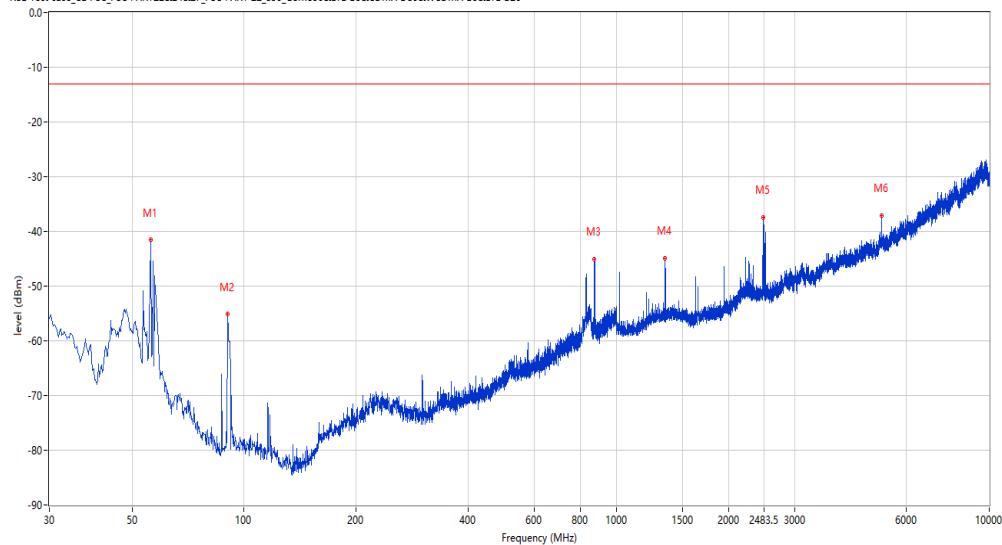

| Frequency (MHz) | Result (dBm) | Factor (dB) | Limit (dBm) | Margin (dB) | Table (o) | ANT      | EUT      | Verdict |
|-----------------|--------------|-------------|-------------|-------------|-----------|----------|----------|---------|
| 56.190          | -41.55       | -12.83      | -13.0       | 28.55       | 149.00    | Vertical | Vertical | Pass    |
| 90.140          | -55.15       | -19.60      | -13.0       | 42.15       | 210.00    | Vertical | Vertical | Pass    |
| 870.020         | -45.08       | 0.21        | -13.0       | 32.08       | 100.60    | Vertical | Vertical | Pass    |
| 1345.500        | -44.87       | -0.45       | -13.0       | 31.87       | 186.00    | Vertical | Vertical | Pass    |
| 2476.000        | -37.40       | 3.98        | -13.0       | 24.40       | 360.00    | Vertical | Vertical | Pass    |
| 5138.000        | -37.04       | 14.94       | -13.0       | 24.04       | 109.70    | Vertical | Vertical | Pass    |