

849 NW State Road 45 Newberry, F1 32669 USA Phone: 888.472.2424 or

352.472.5500

Fax: 352.472.2030

Email: <u>info@timcoengr.com</u>
Website: www.timcoengr.com

# FCC PART 15.209 LOW POWER TRANSMITTER TEST REPORT

Applicant	KASTLE SYSTEMS INTERNATONAL					
Address	6402 ARLINGTON BLVD.					
Addi ess	FALLS CHURCH, VA 22042					
FCC ID	2ALZS-AIO-A					
Models	1305, 1305-W, 1305-E, 1305-EW, 1305-WB, 1305-EBW					
<b>Product Description</b>	BLE ARCH READER					
Date Sample Received	5/2/2017					
Date Tested	5/2/2017					
Tested By	Tim Royer					
Approved By	Sid Sanders					
Test Results	□ FAIL					

Report	Version	Description	Issue Date
Number	Number		
789UT17TestReport1	Rev1	Initial Issue	5/5/2017
	Rev2	Corrected Report	5/17/2017
	Rev3	Added power line conducted	5/25/2017
		emissions	
	Rev4	Updated equipment list	5/26/2017

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



# **TABLE OF CONTENTS**

GENERAL REMARKS	3
REPORT SUMMARY	4
TEST ENVIRONMENT	4
TEST SETUP SUMMARY	4
DUT SPECIFICATION	5
TEST SUPPORTING EQUIPMENT	5
TEST PROCEDURES	6
POWER LINE CONDUCTED INTERFERENCE	7
RADIATED SPURIOUS EMISSIONS	10
OCCUPIED BANDWIDTH	11
TEST EQUIPMENT LIST	12

Applicant: KASTLE SYSTEMS INTERNATIONAL

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 2 of 12



#### **GENERAL REMARKS**

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

#### Summary

The device under test does:

Fulfill the general approval requirements as identified in this test report and was selected by the customer.

Not fulfill the general approval requirements as identified in this test report

#### **Attestations**

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, FL 32669

Tested by:

Name and Title: Tim Royer, Project Manager/Testing Engineer

Date: 5/5/2017

Reviewed and approved by:

Name and Title: Sid Sanders, Engineer

Date: 5/16/17

Applicant: KASTLE SYSTEMS INTERNATIONAL

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 3 of 12



# **REPORT SUMMARY**

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	Pt 15.209, ANSI C63.10: 2013
Related Report	None

## **TEST ENVIRONMENT**

Test Facility	Timco Engineering, Inc. 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition in the	

# **TEST SETUP SUMMARY**

Test Setup Diagram/ Description	The DUT was placed on the turntable per setup per ANSI C63.4: 2014. A test set up photo is provided for clarification.
Deviation from the standard/procedure	No deviation
Modification of DUT	No modification

Applicant: KASTLE SYSTEMS INTERNATIONAL

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 4 of 12



# **DUT SPECIFICATION**

<b>DUT Description</b>	BLE ARCH READER				
FCC ID	2ALZS-AIO-A				
Models	1305, 1305-W, 1305-E, 1305-EW, 1305-WB, 1305-EBW				
	☐ 110-120Vac/50- 60Hz				
<b>DUT Power Source</b>	☑ DC Power, 12V				
	☐ Battery Operated Exclusively				
	☐ Prototype				
Test Item	□ Pre-Production				
	Production				
	⊠ Fixed				
Type of Equipment	☐ Mobile				
	☐ Portable				
Laboratory	Temperature: 26°C				
<b>Test Conditions</b>	Humidity: 55%				
Modifications to DUT:					

# **TEST SUPPORTING EQUIPMENT**

Device	Manufacturer	Model	S/N	Supplied By	Used For
12V supply	Security and Fire Electronics	V6T	N/A	Security and Fire Electronics	Powerline

Applicant: KASTLE SYSTEMS INTERNATIONAL <u>Table Of Contents</u>

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 5 of 12



### **TEST PROCEDURES**

**Power line conducted Emission:** The test procedure used was ANSI C63.4-2009. The spectrum was scanned from 0.15 to 30 MHz.

**Radiation Interference:** The test procedure used was ANSI C63.4 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes when necessary.

Formula of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

#### Example:

Freq (MHz) Meter Reading + ACF + CL = FS

33  $20 \text{ dB}\mu\text{V}$  + 10.36 dB/m + 0.40 dB =  $30.76 \text{ dB}\mu\text{V/m}$  @ 3m

**ANSI C63.4 Measurement Procedures:** The EUT was placed on a non-conducting table 80 cm above the ground plane with the EUT located in the center of the table. With the antenna vertical a preliminary scan was done at 1 meters distance, the EUT was moved to a 3.0-meter distance and the antenna height varied and also placed in a horizontal position. The frequency was scanned from 9.0 kHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The EUT was measured in three (3) orthogonal planes (as necessary).

Applicant: KASTLE SYSTEMS INTERNATIONAL <u>Table Of Contents</u>

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 6 of 12



## POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBµV)	Average Limits (dBµV)				
0.15 - 0.5	66 – 56 *	56 – 46 *				
0.5 - 5.0	56	46				
5.0 - 30	60	50				
* [	* Decrease with logarithm of frequency					

**Test Data:** The following plots represent the emissions read for power line conducted. Both lines were observed.

KASTLE SYSTEMS INTERNATIONAL Applicant:

A2LZS-AIO-A

FCC ID: Report: 789UT17TestReport\_Rev4 Page 7 of 12



### POWER LINE CONDUCTED INTERFERENCE

Test Data: Line 1

25.May 17 10:10


#### Time Domain Scan (1 Range)

Scan Start: 150 kHz Scan Stop: 30 MHz

Detector: Trace 1: MAX PEAK Trace 2: Average

Transducer: tdf\_21

Start	t Stop Step Me		Meas	RF			
Frequency	Frequency	Size	Res BW	Time	Atten	Preamp	Input
150 000000 kH	3.0 000000 ME	12 2 25 kHz	9 00 247	500 me	Auto	0 dB	TMDHT2

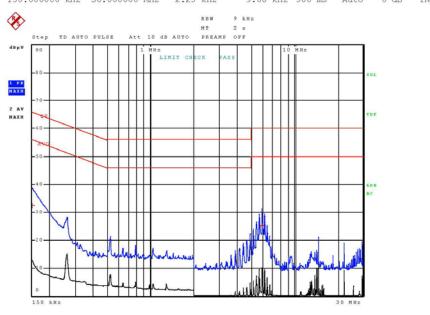

#### **Final Measurement**

 Meas Time:
 2 s

 Margin:
 30 dB

 Subranges:
 2

Trace	Frequency		Level (dBµV)	Detector	Delta Limit/dB	
1	150.000000000 k	кHz	32.50	Quasi Peak	-33.50	
1	5-941500000 M	/Hz	25.23	Ouasi Peak	-34.77	

Page 1 of 2

Applicant: KASTLE SYSTEMS INTERNATIONAL <u>Table Of Contents</u>

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 8 of 12



### POWER LINE CONDUCTED INTERFERENCE

Test Data: Line 2

25.May 17 10:08


#### Time Domain Scan (1 Range)

Scan Start: 150 kHz Scan Stop: 30 MHz

Detector: Trace 1: MAX PEAK Trace 2: Average

Transducer: tdf\_21

Start Frequency		Stop	Step			Meas	RF		Input
		Frequency	Size		Res BW	Time	Atten	Preamp	
150.000000	kHz	30.000000 MH	z 2.25	kHz	9.00 kHz	500 ms	Auto	0 dB	INPUT2

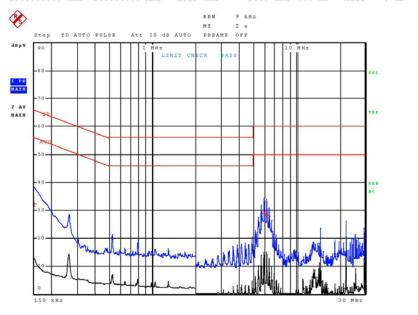

#### **Final Measurement**

Meas Time: 2 s Margin: 30 dB Subranges: 3

Trace	Frequency		Level (dBµV)	Detector		Delta Limit/dB	
1	150.000000000	kHz	32.16	Quasi	Peak	-33.	84
1	5.943750000	MHz	28.91	Quasi	Peak	-31.	09
1	6.204750000	MHz	28.17	Quasi	Peak	-31.	83

Page 1 of 2

Applicant: KASTLE SYSTEMS INTERNATIONAL <u>Table Of Contents</u>

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 9 of 12



### RADIATED SPURIOUS EMISSIONS

**Rules Part No.:** 15.109(a) and 15.209

Requirements: CARRIER FREQUENCY WILL NOT EXCEED 2400/F (kHz)uV/m

AT 300 METERS

OUT-OF-BAND EMISSIONS SHALL NOT EXCEED THE LEVEL OF

THE FUNDAMENTAL.

Frequency MHz	Limits			
9 – 490 kHz	2400/F (kHz) μV/m @ 300 meters			
490 – 1705 kHz	24000/F (kHz) µV/m @ 30 meters			
1705 – 30 MHz	29.54 dBµV/m measured @ 30 meters			
30 – 88	40.0 dBµV/m measured @ 3 meters			
88 – 216	43.5 dBµV/m measured @ 3 meters			
216 – 960	46.0 dBµV/m measured @ 3 meters			
Above 960	54.0 dBµV/m measured @ 3 meters			

The spectrum was scanned from 10 kHz to 1000 MHz.

#### Test Data:

Tuned	Emission	Meter		Antenna	Coax	Correction	Field	
Freq	Frequency	Reading	Ambient	Polarity	Loss	Factor	Strength	Margin
MHz	MHz	dBu V		Folanty	Db	dB/M	dBu V/M	
0.125	0.125	88.4		V	0.43	11.38	100.19	5.47
0.125	10.0	26.7		V	0.65	10.60	37.98	31.50
0.125	20.1	25.5		V	0.70	10.08	36.25	33.23
0.125	29.8	36.5		V	0.67	8.45	45.59	23.89
0.125	179.9	24.8	*	Η	1.52	14.12	40.46	3.04
0.125	775.5	15.0	*	V	3.20	22.43	40.58	5.42
0.125	862.1	15.3	*	Н	3.37	22.72	41.44	4.56

\*denotes ambient measurement

Applicant: KASTLE SYSTEMS INTERNATIONAL <u>Table Of Contents</u>

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 10 of 12




#### OCCUPIED BANDWIDTH

**RULES PART NO**.: 15.215 (c)

**REQUIREMENTS**: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage

## Test Data: 20dB Occupied Bandwidth Plot

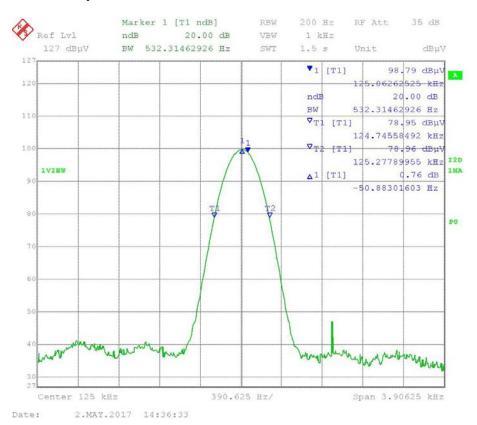

Applicant: KASTLE SYSTEMS INTERNATIONAL <u>Table Of Contents</u>

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 11 of 12



## **TEST EQUIPMENT LIST**

Device	Manufacturer	Model	Serial	Cal/Char	Due Date
			Number	Date	
Antenna: Biconical 1096 Chamber	Eaton	94455-1	1096	07/14/15	07/14/17
Antenna: Log-Periodic 1122	Electro- Metrics	LPA-25	1122	07/14/15	07/14/17
CHAMBER	Panashield	3M	N/A	04/25/16	12/31/17
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	12/12/99	N/A
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/18
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244- 01; KMKM- 0670-00; KFKF-0198- 01	08/09/16	08/09/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	12/12/99	N/A
Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	01/04/16	01/04/18
LISN (Primary)	Electro- Metrics	ANS-25/2	2604	07/13/15	07/13/17
LISN (Secondary)	Electro- Metrics	EM-7820	2682	N/A	N/A

## \*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT

Applicant: KASTLE SYSTEMS INTERNATIONAL <u>Table Of Contents</u>

FCC ID: A2LZS-AIO-A

Report: 789UT17TestReport\_Rev4 Page 12 of 12