FCC Report (LTE)

Applicant:	Mobilelock
Address of Applicant:	550M Ritchie Hwy #279, Severna Park, Maryland 21146, United States
Manufacturer:	Asia Telco Technologies Co.
Address of Manufacturer:	#289 Bisheng Road, Building-8,3F,Zhangjiang Hi-Tech Park,Pudong,Shanghai 201204,China
Equipment Under Test (EUT)	
Product Name:	MOBIL ELOCK
Model No.:	DS600L
FCC ID:	2AOI9-DS600L
Applicable standards:	FCC CFR Title 47 Part 2: 2017 FCC CFR Title 47 Part27: 2017
Date of sample receipt:	January 08, 2018
Date of Test:	January 08-21, 2018
Date of report issued:	January 23, 2018
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	*January 23, 2018*	*Original*

Prepared By:	Bill. yuan	***Date:***	*January 23, 2018*
	Project Engineer		
Check By:	Andy. wu	***Date:***	*January 23, 2018*
	Reviewer		

3 Contents

Page

COVER PAGE **1**

2 VERSION **2**

3 CONTENTS **3**

4 TEST SUMMARY **4**

5 GENERAL INFORMATION **5**

5.1 GENERAL DESCRIPTION OF EUT 5
5.2 RELATED SUBMITTAL(S) / GRANT (S) 7
5.3 TEST METHODOLOGY 7
5.4 TEST FACILITY 7
5.5 TEST LOCATION 7
5.6 ADDITIONAL INSTRUCTIONS 7

6 TEST INSTRUMENTS LIST **8**

7 SYSTEM TEST CONFIGURATION **9**

7.1 TEST MODE 9
7.2 CONFIGURATION OF TESTED SYSTEM 10
7.3 CONDUCTED PEAK OUTPUT POWER 11
7.4 PEAK-TO-AVERAGE RATIO 16
7.5 OCCUPY BANDWIDTH 34
7.6 MODULATION CHARACTERISTIC 53
7.7 OUT OF BAND EMISSION AT ANTENNA TERMINALS 53
7.8 ERP, EIRP MEASUREMENT 86
7.9 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT 104
7.10 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT 118
7.11 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT 121

8 TEST SETUP PHOTO **123**

9 EUT CONSTRUCTIONAL DETAILS **124**

4 Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1091	Pass* (Please refer to MPE Report)
RF Output Power	Part 2.1046 Part 27.50(b)(9)/(d)(5)	Pass
Modulation Characteristics	Part 2.1047	N/A
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(h)/(c)(2)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(h)/(c)(2)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(h)/(c)(2)	Pass
Out of band emission, Band Edge	Part 27.53(h)/(c)(2)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2)	Pass
Peak-to-Average ratio	Part 27.50(d)(5)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 General Description of EUT

Product Name:	MOBIL ELOCK
Model No.:	DS600L
Sample(s) Status:	Engineer sample
Quantity of tested samples	1
Serial No.:	20173353614
Tested Sample(s) ID:	GTS201712000134-1
Hardware Version:	P1
Software Version:	32741
Support Networks:	LTE
Support Bands:	LTE Band 4, LTE Band 13
Channel Bandwidth:	LTE Band 4: 1.4MHz; 3MHz; 5MHz; 10MHz; 15MHz; 20MHz LTE Band 13: 5MHz; 10MHz
TX Frequency:	LTE Band 4: 1710.70MHz-1754.30MHz LTE Band 13: 779.50MHz-784.50MHz
Modulation type:	LTE Band 4/13: QPSK, 16QAM
Antenna type:	Integral antenna
Antenna gain:	0dBi(Band 4), 0dBi(Band 13)
Power supply:	SWITCHING ADAPTER MODEL: ASSA1A-045200 INPUT: AC 100-240V 50/60Hz 0.45A OUTPUT: DC 4.5V 2.0A Battery: DC 3.7V Li-ion 19.24Wh

Operation Frequency each of channel					
Band 4					
Bandwidth	Channel	Frequency	Bandwidth	Channel	Frequency
1.4MHz	19957	1710.7MHz	3MHz	19965	1711.5MHz
	⋮	⋮		⋮	⋮
	20175	1732.5MHz		20175	1732.5MHz
	⋮	⋮		⋮	⋮
	20393	1754.3MHz		20385	1753.5MHz
5MHz	19975	1712.5MHz	10MHz	20000	1715.0MHz
	⋮	⋮		⋮	⋮
	20175	1732.5MHz		20175	1732.5MHz
	⋮	⋮		⋮	⋮
	20375	1752.5MHz		20350	1750.0MHz
15MHz	20025	1717.5MHz	20MHz	20050	1720.00MHz
	⋮	⋮		⋮	⋮
	20175	1732.5MHz		20175	1732.5MHz
	⋮	⋮		⋮	⋮
	20325	1747.5MHz		20300	1745.0MHz

Band 13					
Bandwidth	Channel	Frequency	Bandwidth	Channel	Frequency
5MHz	23205	779.5MHz	10MHz	---	---
	⋮	⋮		---	---
	23230	782.0MHz		23230	782.0MHz
	⋮	⋮		---	---
	23255	784.5MHz		---	---

5.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 27 of the FCC CFR 47 Rules.

5.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fuly described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

● **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.6 Additional instructions

CMW500 (Used for fixed frequency test)

6 Test Instruments list

Radiated Emission:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jun. 29 2017	Jun. 28 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jun. 29 2017	Jun. 28 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Jun. 29 2017	Jun. 28 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	Jun. 29 2017	Jun. 28 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Jun. 29 2017	Jun. 28 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Jun. 29 2017	Jun. 28 2018
10	Coaxial Cable	GTS	N/A	GTS211	Jun. 29 2017	Jun. 28 2018
11	Coaxial cable	GTS	N/A	GTS210	Jun. 29 2017	Jun. 28 2018
12	Coaxial Cable	GTS	N/A	GTS212	Jun. 29 2017	Jun. 28 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jun. 29 2017	Jun. 28 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jun. 29 2017	Jun. 28 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Jun. 29 2017	Jun. 28 2018
16	Band filter	Amindeon	82346	GTS219	Jun. 29 2017	Jun. 28 2018
17	Universal Radio Communication tester	ROHDE&SCHWARZ	CMU 200	GTS538	Jun. 29 2017	Jun. 28 2018
18	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW 500	GTS539	Jun. 29 2017	Jun. 28 2018

General used equipment:						
Item	**Test Equipment**	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal.Date (mm-dd-yy)**	**Cal.Due date (mm-dd-yy)**
1	Barometer	ChangChun	DYM3	GTS257	Jun. 29 2017	Jun. 28 2018

7 System test configuration

7.1 Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
LTE Band 4	■ QPSK and 16QAM link	■ QPSK and 16QAM link
LTE Band 13	■ QPSK and 16QAM link	■ QPSK and 16QAM link

7.2 Configuration of Tested System

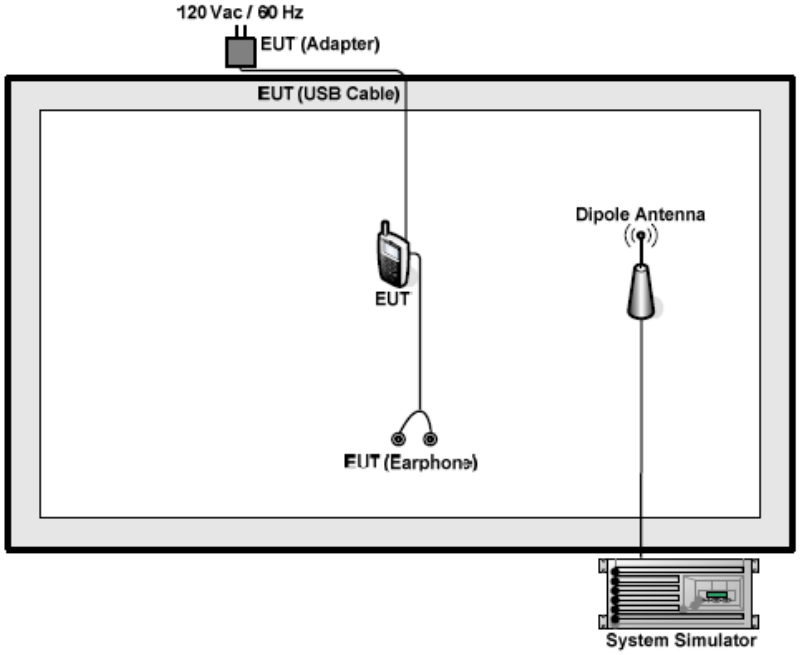

7.3 Conducted Peak Output Power

Test Requirement:	Part 27.50(b)(9)/(d)(5)
Test Method:	FCC part2.1046
Limit:	LTE Band 4: 1W LTE Band 13: 30W
Test setup:	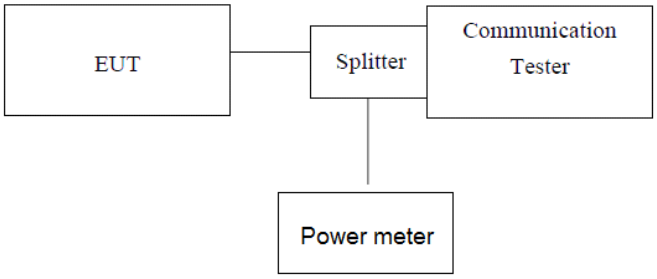 *Note: Measurement setup for testing on Antenna connector*
Test Procedure:	1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Band 4						
Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				Channel 19957 1710.7MHz	Channel 20175 1732.5MHz	Channel 20393 1754.3MHz
1.4MHz	QPSK	1	0	22.57	23.25	22.58
		1	2	22.59	23.13	22.63
		1	5	23.07	23.75	23.14
		3	0	22.51	22.87	22.62
		3	1	22.41	22.66	22.72
		3	2	22.53	22.87	22.83
		6	0	23.11	22.74	23.05
	16QAM	1	0	22.24	22.93	22.42
		1	2	22.31	22.79	22.49
		1	5	22.87	22.88	22.52
		3	0	22.28	22.49	22.37
		3	1	22.35	22.92	22.48
		3	2	22.45	22.89	22.56
		6	0	22.99	23.08	22.95
Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				Channel 19965 1711.5MHz	Channel 20175 1732.5MHz	Channel 20385 1753.5MHz
3MHz	QPSK	1	0	22.41	22.83	22.45
		1	8	22.59	22.69	22.58
		1	14	22.74	23.03	22.32
		8	0	22.28	22.61	22.52
		8	4	22.31	22.85	22.79
		8	7	22.71	22.59	22.66
		15	0	22.32	22.56	22.58
	16QAM	1	0	22.53	22.71	22.41
		1	8	22.29	22.87	22.35
		1	15	22.81	22.81	22.45
		8	0	22.41	22.65	22.37
		8	4	22.38	22.79	22.45
		8	7	22.49	22.63	22.72
		15	0	22.91	23.03	22.48

Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				Channel 19975 1712.5MHz	Channel 20175 1732.5MHz	Channel 20375 1752.5MHz
5MHz	QPSK	1	0	22.45	22.69	22.39
		1	13	22.47	22.59	22.67
		1	24	22.32	23.07	22.28
		12	0	22.42	22.73	22.59
		12	6	22.39	22.81	22.43
		12	13	22.46	22.63	22.55
		25	0	22.83	22.69	22.57
	16QAM	1	0	22.33	22.82	22.44
		1	13	22.39	22.68	22.54
		1	24	22.81	22.63	22.82
		12	0	22.59	22.71	22.38
		12	6	22.21	22.65	22.36
		12	13	22.33	22.75	22.52
		25	0	22.91	22.75	22.35

Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				Channel 20000 1715.0MHz	Channel 20175 1732.5MHz	Channel 20350 1750.0MHz
10MHz	QPSK	1	0	22.45	22.47	22.56
		1	25	22.49	22.53	22.52
		1	49	23.02	23.01	22.37
		25	0	22.35	22.73	22.46
		25	13	22.39	22.39	22.45
		25	25	22.68	22.52	22.55
		50	0	2303	22.59	22.19
	16QAM	1	0	22.45	22.63	22.29
		1	25	22.18	22.73	22.35
		1	49	22.87	22.85	22.85
		25	0	22.55	22.71	22.25
		25	13	22.57	22.66	22.31
		25	25	22.39	22.49	22.47
		50	0	22.93	22.95	22.95

Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				Channel 20025 1717.5MHz	Channel 20175 1732.5MHz	Channel 20325 1747.5MHz
15MHz	QPSK	1	0	22.22	22.87	22.63
		1	38	22.48	22.86	22.75
		1	74	22.97	23.01	22.85
		36	0	22.27	22.65	22.45
		36	18	22.29	22.86	22.68
		36	39	22.48	22.53	22.71
		75	0	22.78	23.02	23.02
	16QAM	1	0	22.48	22.71	22.21
		1	38	22.62	22.65	22.29
		1	74	22.85	22.84	22.87
		36	0	22.45	22.73	22.25
		36	18	22.29	22.76	22.35
		36	39	22.36	22.87	22.48
		75	0	22.81	22.95	22.91

Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				Channel 20050 1720.0MHz	Channel 20175 1732.5MHz	Channel 20300 1745.0MHz
20MHz	QPSK	1	0	22.48	22.79	22.31
		1	50	22.67	22.91	22.54
		1	99	22.96	23.03	23.01
		50	0	22.52	22.94	22.29
		50	25	22.75	22.96	22.38
		50	50	22.65	22.93	22.49
		100	0	22.85	23.02	22.54
	16QAM	1	0	22.14	22.91	22.46
		1	50	22.27	22.75	22.56
		1	99	22.84	22.84	22.53
		50	0	22.37	22.85	22.48
		50	25	22.29	22.79	22.36
		50	50	22.74	22.89	22.28
		100	0	22.87	22.98	22.94

Band 13						
Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				Channel 23205 779.5MHz	Channel 23230 782.0MHz	Channel 23255 784.5MHz
5MHz	QPSK	1	0	22.42	23.71	22.53
		1	13	22.85	23.15	22.89
		1	24	22.74	23.18	22.83
		12	0	22.58	22.98	22.76
		12	6	22.56	23.56	22.59
		12	13	22.59	23.59	22.61
		25	0	22.72	23.24	22.25
	16QAM	1	0	22.58	23.11	22.41
		1	13	22.78	23.51	22.56
		1	24	22.81	22.91	22.98
		12	0	22.73	22.85	22.14
		12	6	22.59	22.96	22.43
		12	13	22.58	22.89	22.29
		25	0	22.82	22.57	22.58
Bandwidth	Mode	RB Size	RB Offset	Actual output power(dBm)		
				---	Channel 23230 782.0MHz	---
10MHz	QPSK	1	0	---	22.49	---
		1	25	---	22.85	---
		1	49	---	23.14	---
		25	0	---	22.69	---
		25	13	---	22.71	---
		25	25	---	22.68	---
		50	0	---	23.19	---
	16QAM	1	0	---	22.36	---
		1	25	---	22.48	---
		1	49	---	22.91	---
		25	0	---	22.49	---
		25	13	---	22.87	---
		25	25	---	22.75	---
		50	0	---	23.01	---

Remark: “---“is not applicable.

7.4 Peak-to-Average Ratio

Test Requirement:	Part 27.50(d)(5)
Test Method:	FCC part2.1046
Limit:	13db
Test setup:	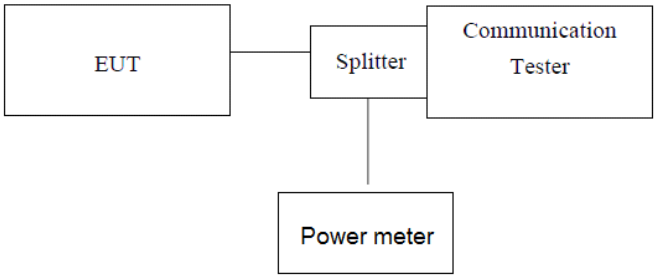 *Note: Measurement setup for testing on Antenna connector*
Test Procedure:	1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst average power. 6. Record the maximum peak-to-average ratio value.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

QPSK mode:

Test Band	Test mode	Peak to Average Ratio (dB)			Limit (dB)	Result
		Low Ch.	Middle Ch.	High Ch.		
LTE Band 4	LTE 1.4MHz Bandwidth	5.50	5.13	5.42	13	PASS
	LTE 3MHz Bandwidth	5.90	5.12	5.30	13	PASS
	LTE 5MHz Bandwidth	5.60	5.05	5.39	13	PASS
	LTE 10MHz Bandwidth	5.40	5.11	5.20	13	PASS
	LTE 15MHz Bandwidth	5.49	5.33	5.56	13	PASS
	LTE 20MHz Bandwidth	5.43	5.33	5.40	13	PASS
LTE Band 13	LTE 5MHz Bandwidth	6.33	6.63	6.55	13	PASS
	LTE 10MHz Bandwidth	---	5.63	---	13	PASS

16QAM mode:

Test Band	Test mode	Peak to Average Ratio (dB)			Limit (dB)	Result
		Low Ch.	Middle Ch.	High Ch.		
LTE Band 4	LTE 1.4MHz Bandwidth	6.78	5.83	5.98	13	PASS
	LTE 3MHz Bandwidth	6.37	5.82	5.90	13	PASS
	LTE 5MHz Bandwidth	6.30	5.95	6.25	13	PASS
	LTE 10MHz Bandwidth	5.49	5.04	5.32	13	PASS
	LTE 15MHz Bandwidth	5.57	5.38	5.30	13	PASS
	LTE 20MHz Bandwidth	5.43	5.39	5.31	13	PASS
LTE Band 13	LTE 5MHz Bandwidth	5.54	5.94	5.78	13	PASS
	LTE 10MHz Bandwidth	---	5.78	---	13	PASS

Test plot as follows:

QPSK mode:

Test band: LTE Band 4	Channel Bandwidth: 1.4MHz

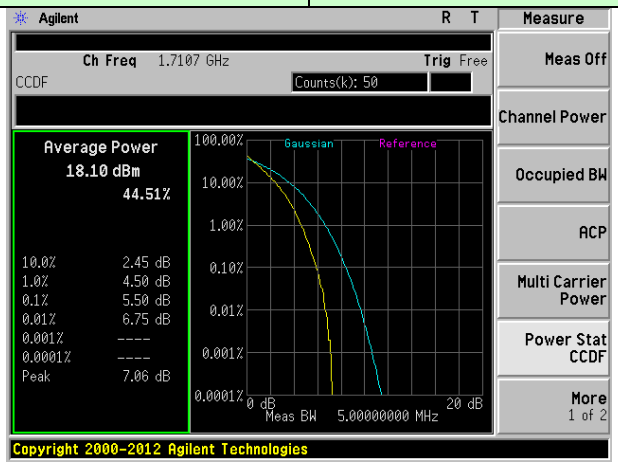

Lowest channel

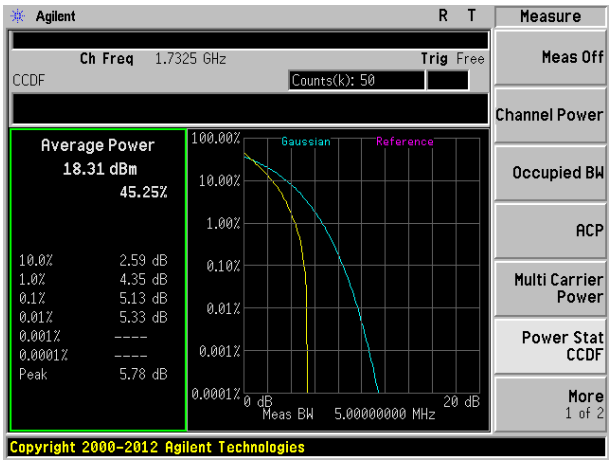

Middle channel

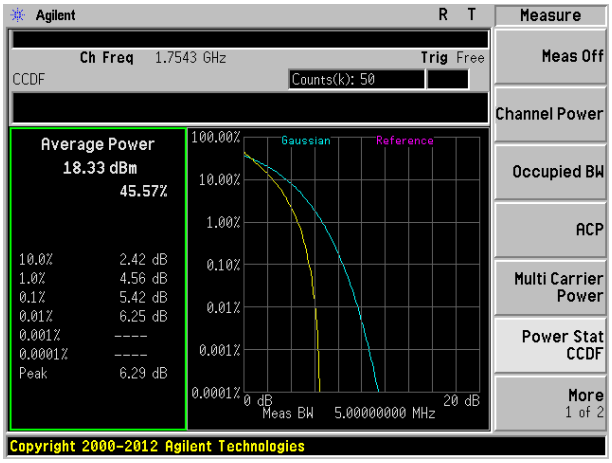

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 3MHz

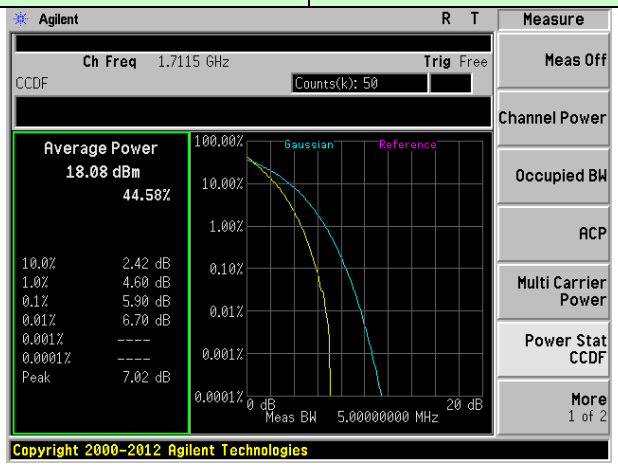

Lowest channel

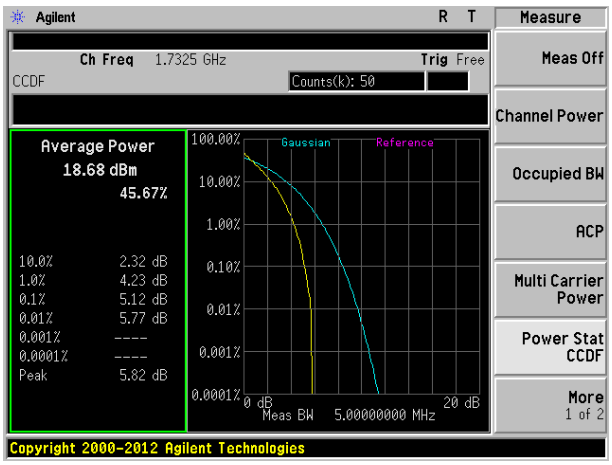

Middle channel

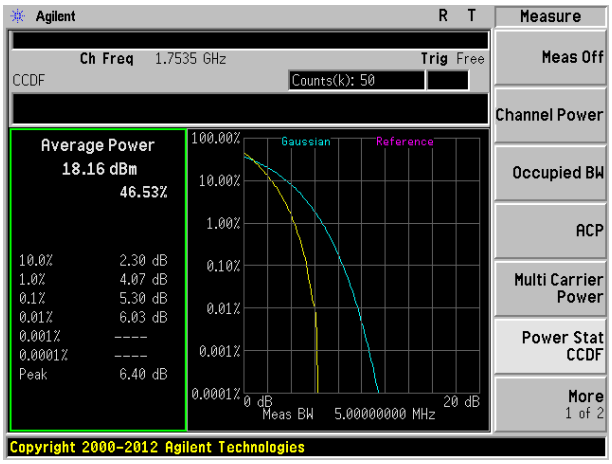

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 5MHz

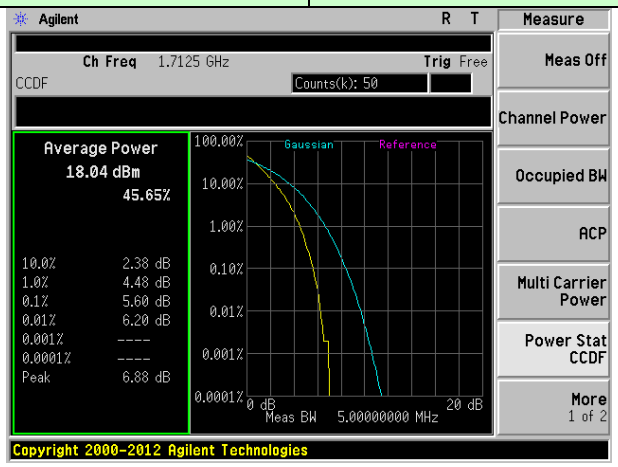

Lowest channel

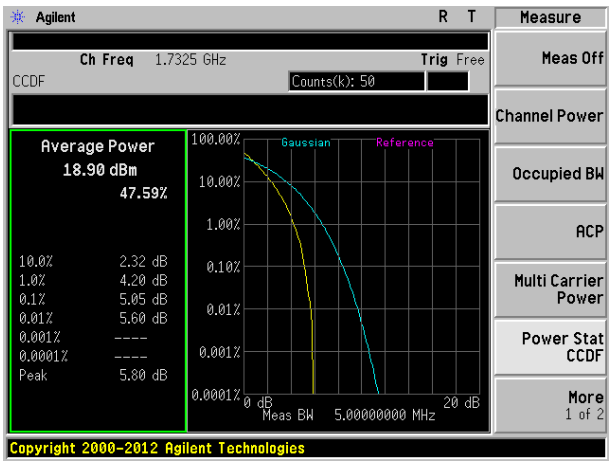

Middle channel

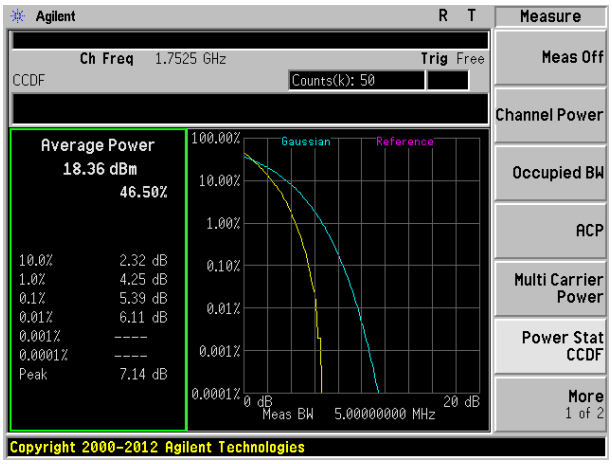

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 10MHz

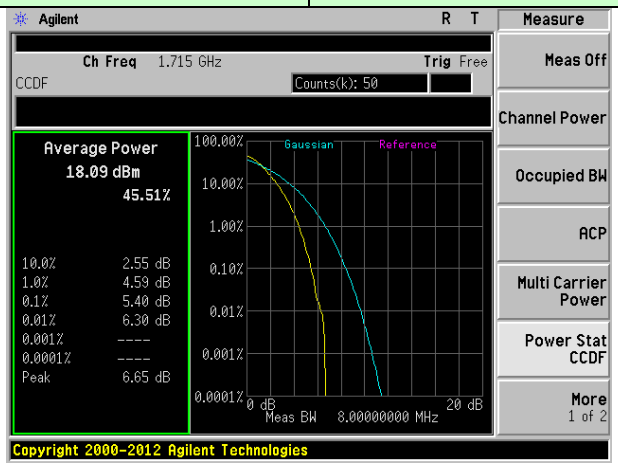

Lowest channel

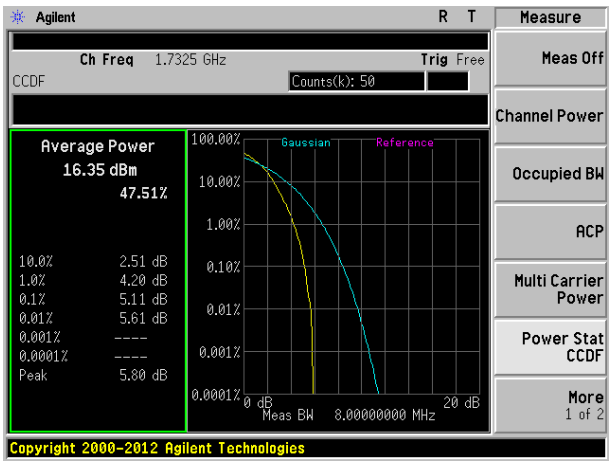

Middle channel

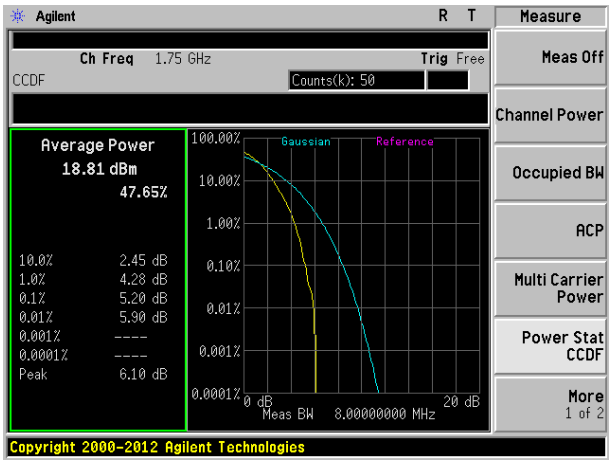

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 15MHz

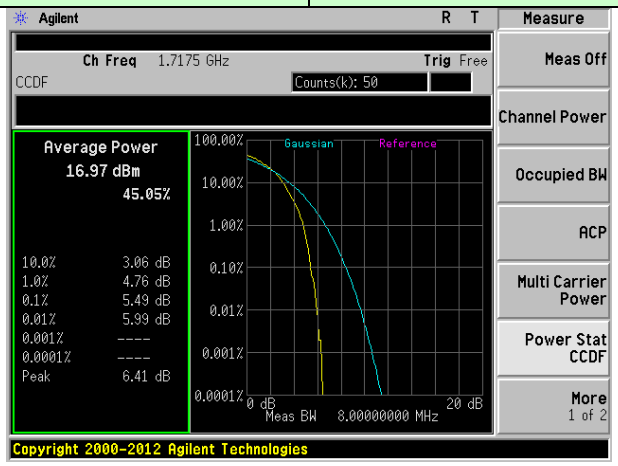

Lowest channel

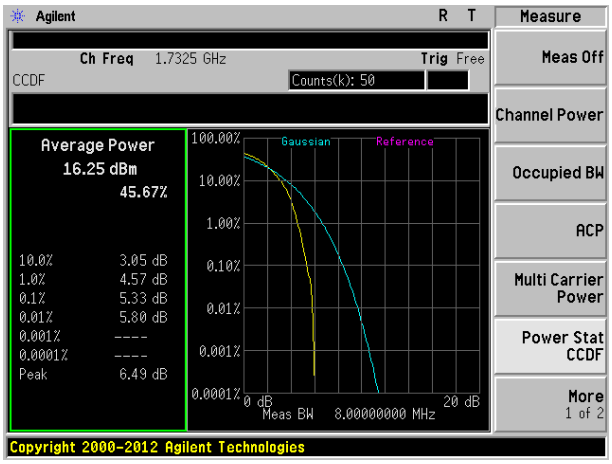

Middle channel

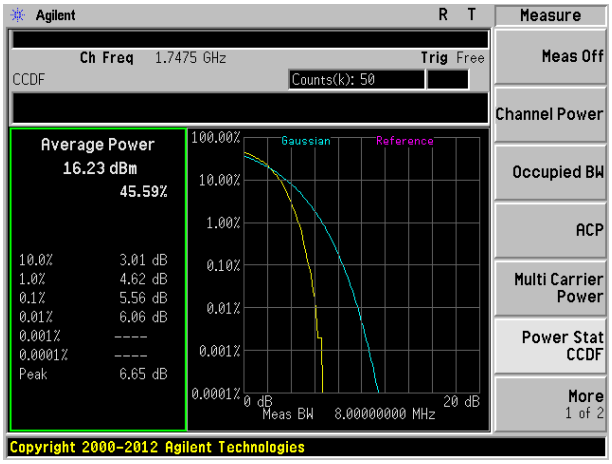

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 20MHz

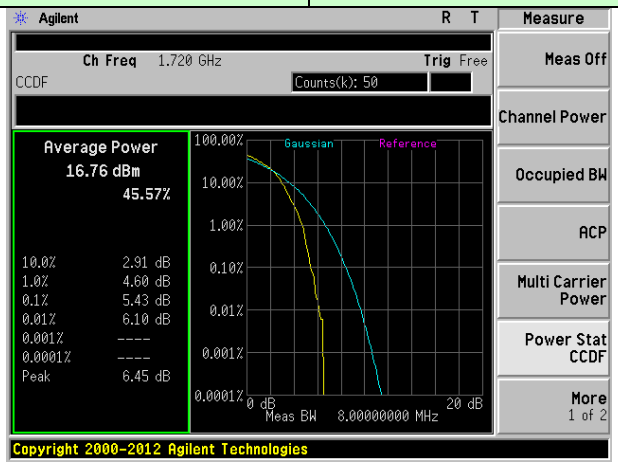

Lowest channel

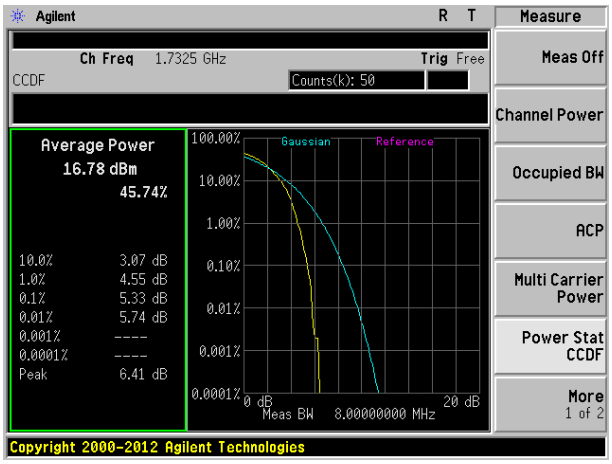

Middle channel

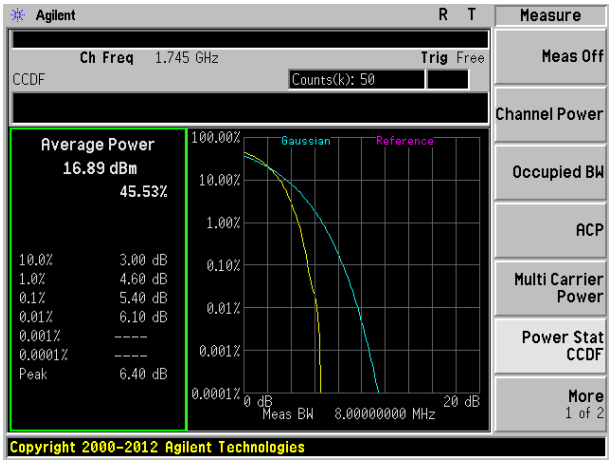

Highest channel

Test band: LTE Band 13	Channel Bandwidth: 5MHz

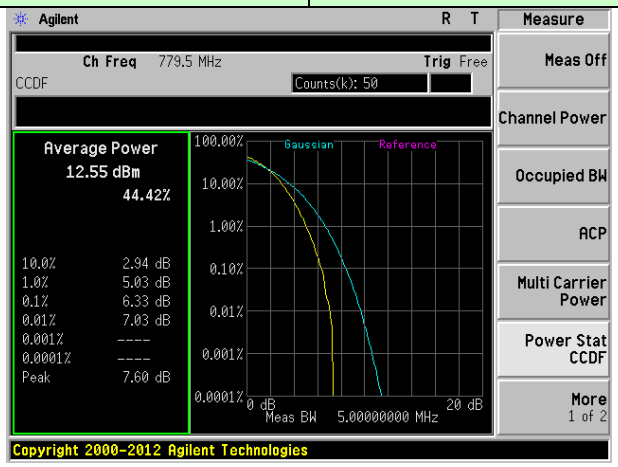

Lowest channel

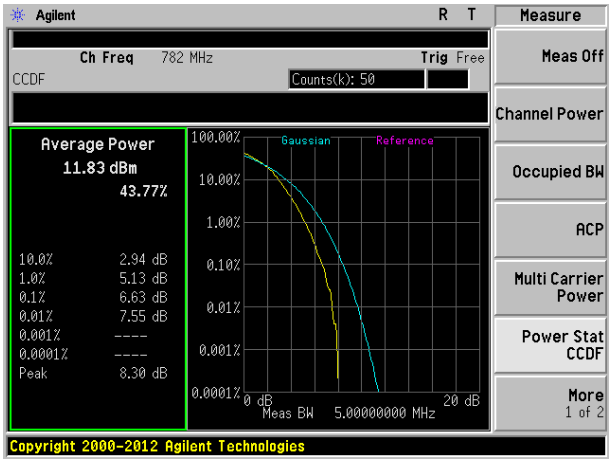

Middle channel

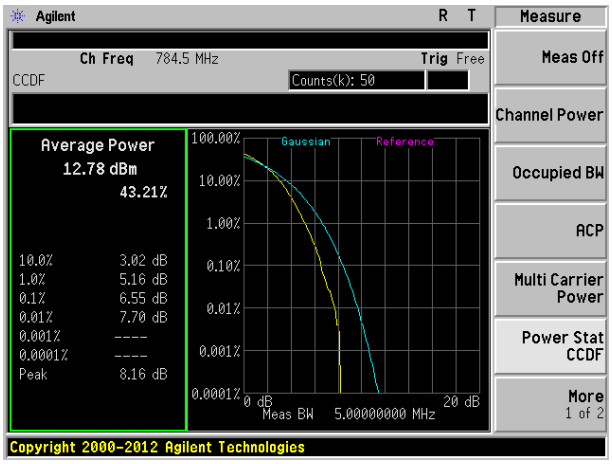

Highest channel

Test band: LTE Band 13	Channel Bandwidth: 10MHz

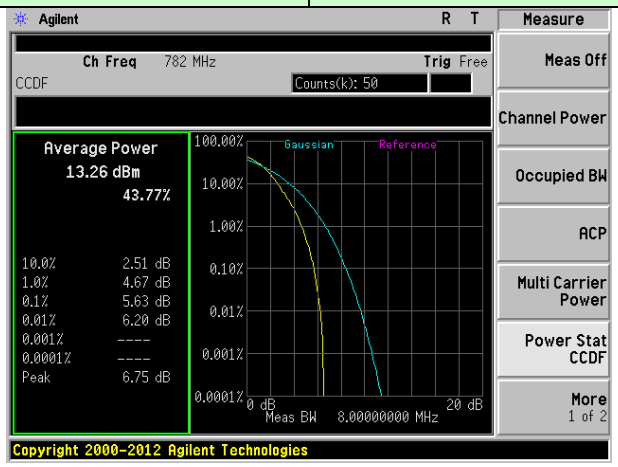

Middle channel

16QAM mode:

Test band: LTE Band 4	Channel Bandwidth: 1.4MHz

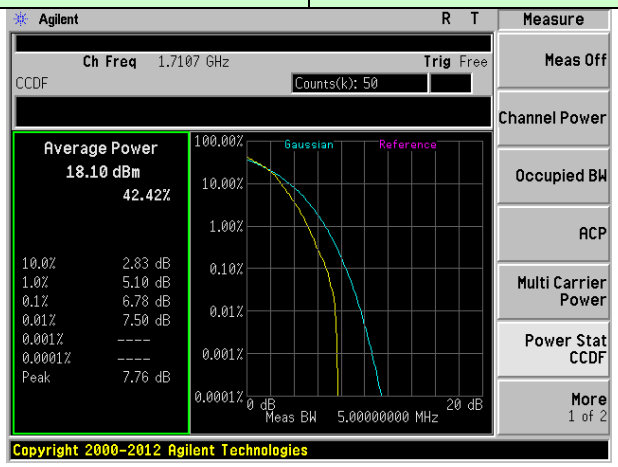

Lowest channel

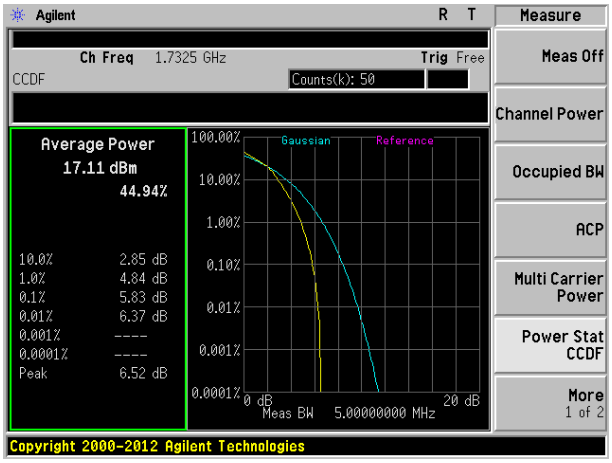

Middle channel

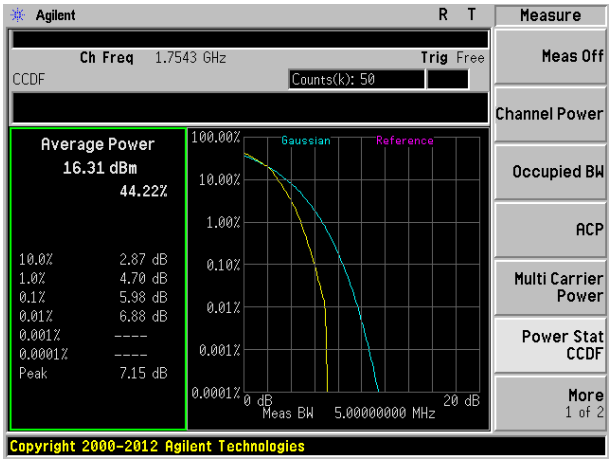

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 3MHz

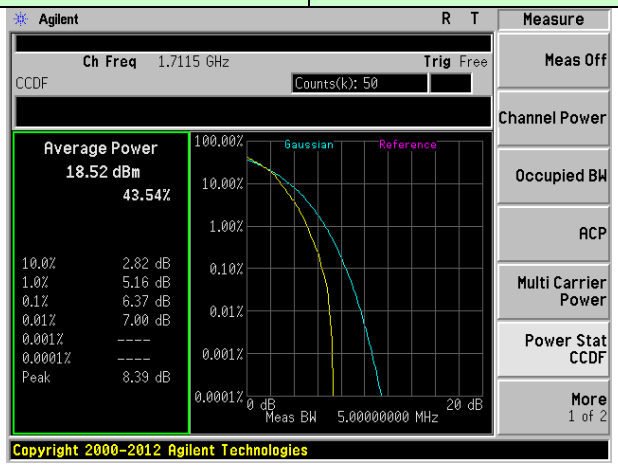

Lowest channel

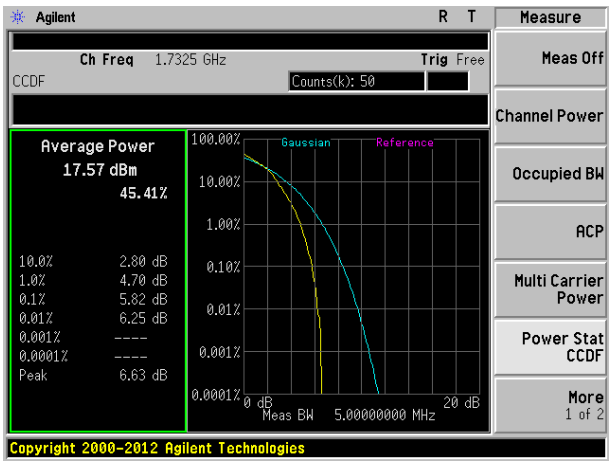

Middle channel

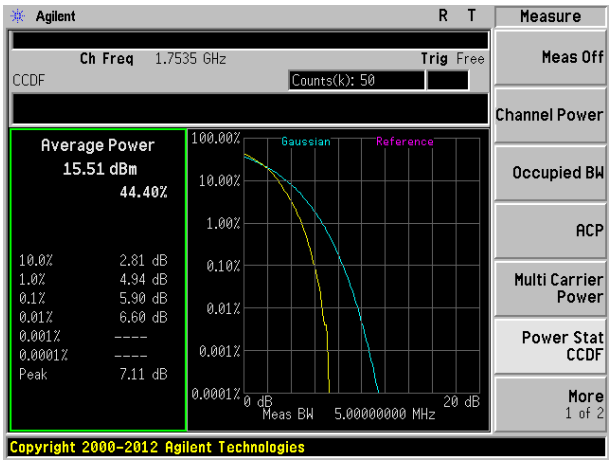

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 5MHz

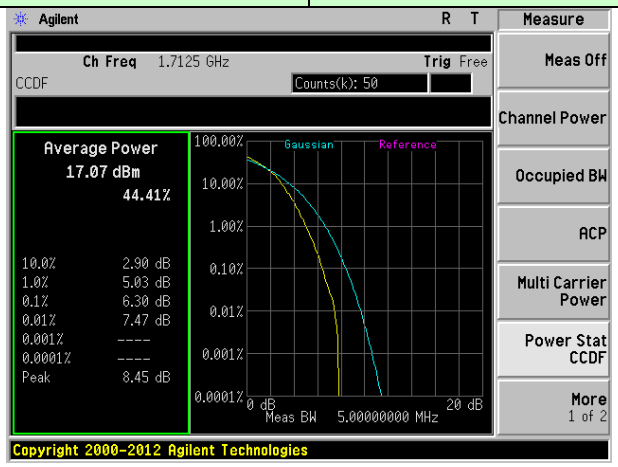

Lowest channel

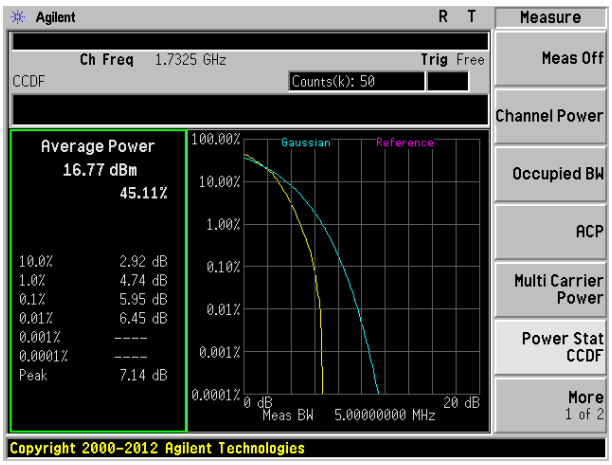

Middle channel

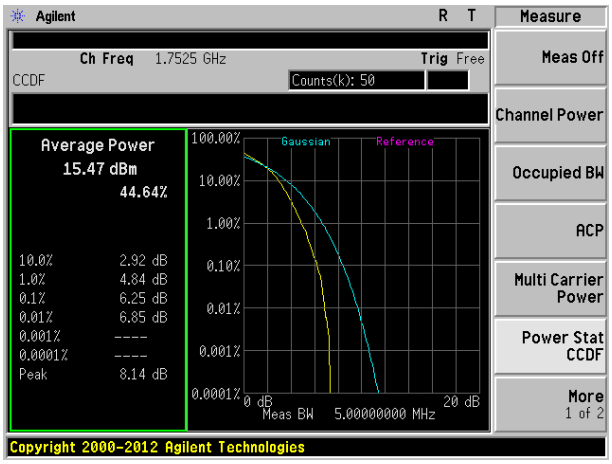

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 10MHz

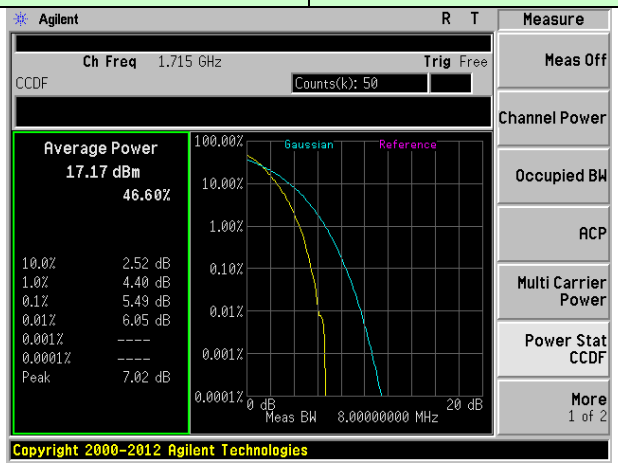

Lowest channel

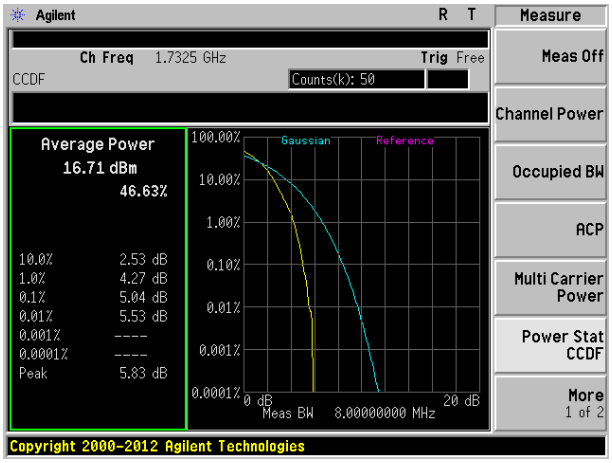

Middle channel

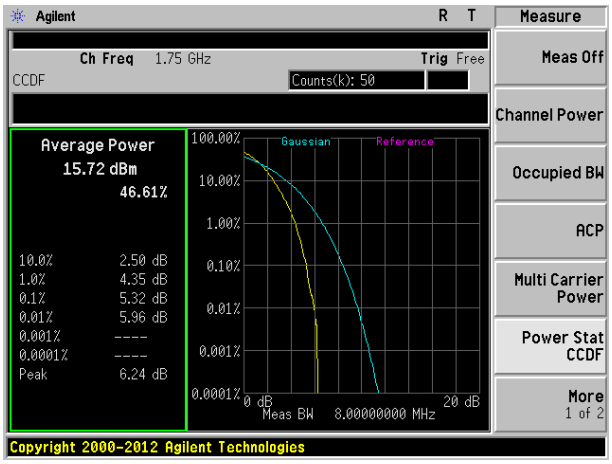

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 15MHz

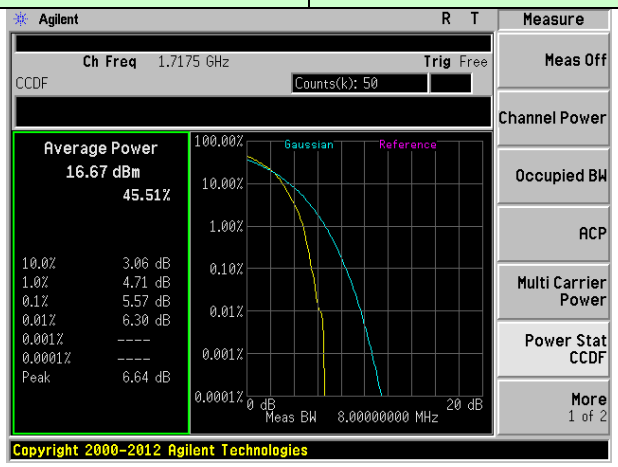

Lowest channel

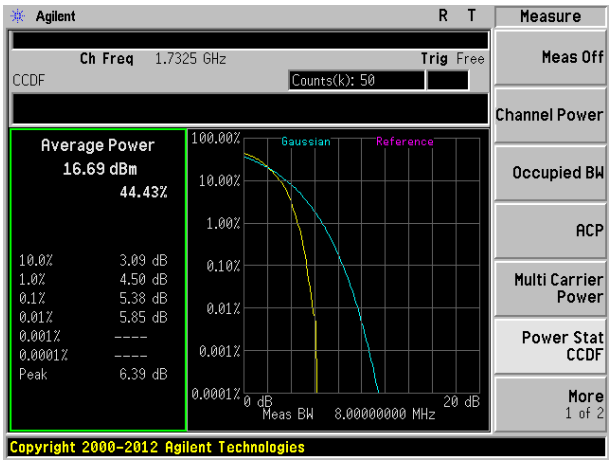

Middle channel

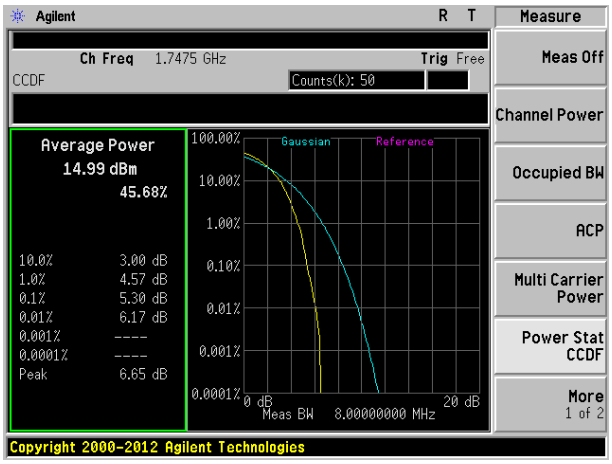

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 20MHz

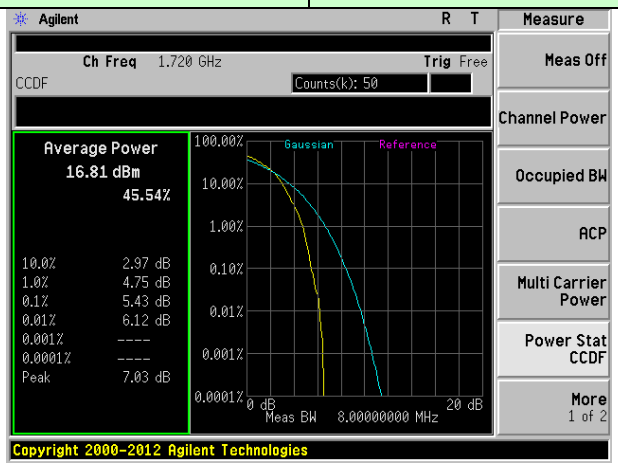

Lowest channel

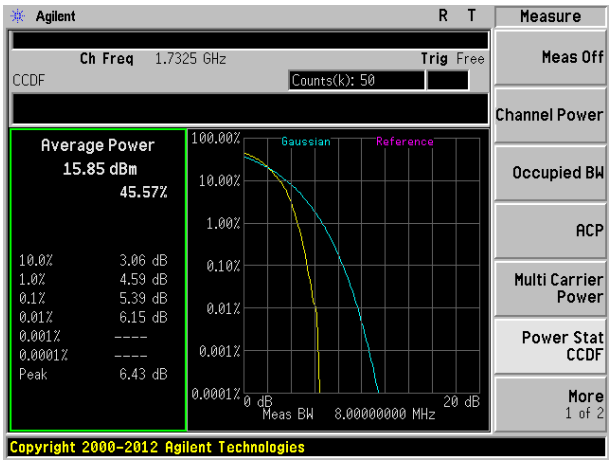

Middle channel

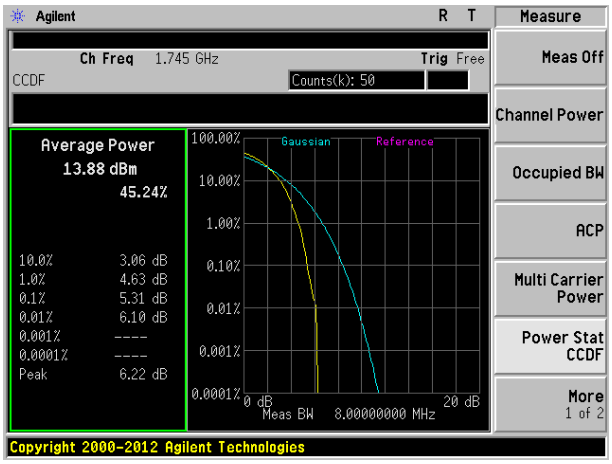

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 5MHz

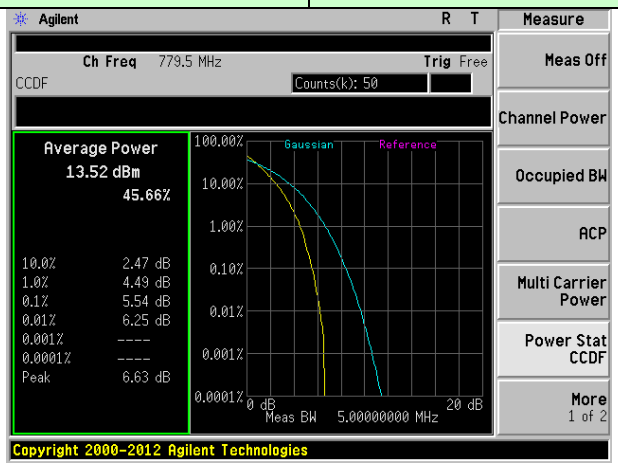

Lowest channel

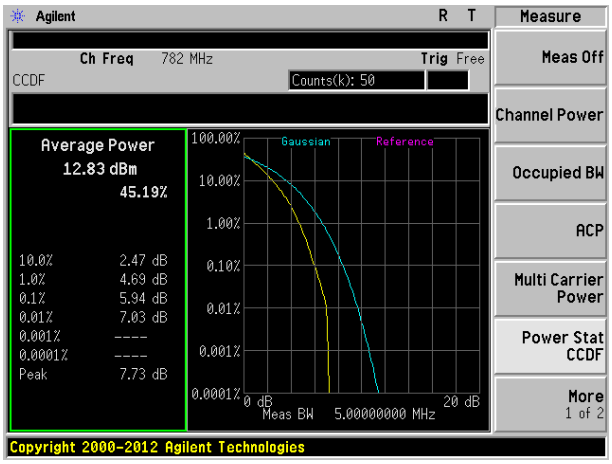

Middle channel

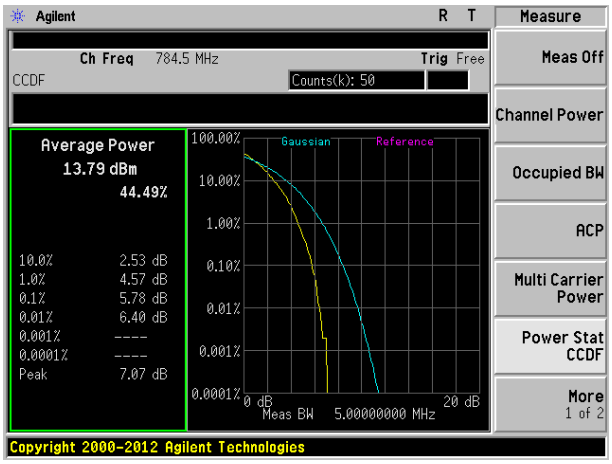

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 10MHz

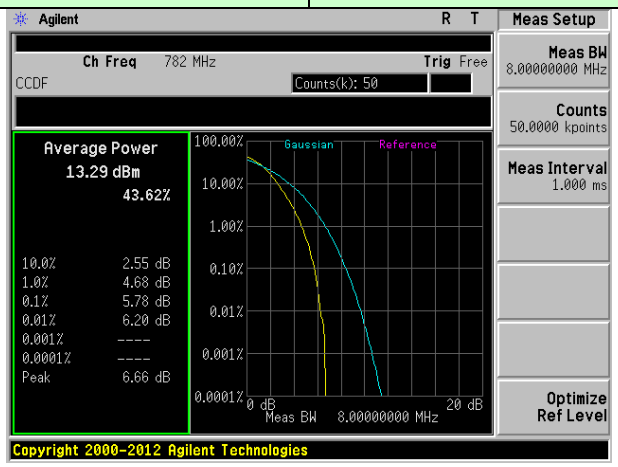

Middle channel

7.5 Occupy Bandwidth

Test Requirement:	FCC Part 27.53(h)/(c)(2)
Test Method:	FCC part2.1049
Test setup:	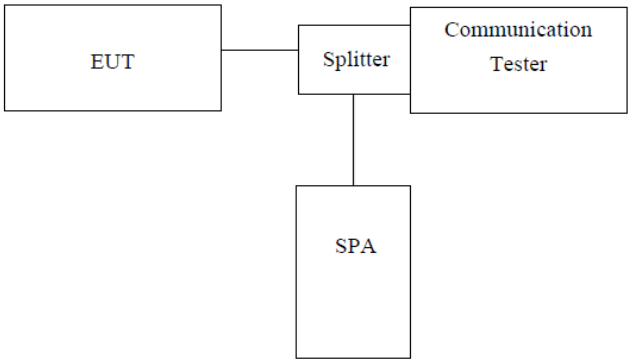 *Note: Measurement setup for testing on Antenna connector*
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

QPSK mode：

EUT Mode	Channel Bandwidth	Channel	RB Configure		99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
			RB Size	RB Offset		
LTE Band 4	1.4MHz	Low range	6	0	1103.90	1292.00
		Mid range	6	0	1106.60	1266.00
		High range	6	0	1095.90	1281.00
	3MHz	Low range	15	0	2679.50	2903.00
		Mid range	15	0	2683.90	2914.00
		High range	15	0	2684.60	2916.00
	5MHz	Low range	25	0	4522.60	5031.00
		Mid range	25	0	4552.90	5094.00
		High range	25	0	4524.90	5037.00
	10MHz	Low range	50	0	8928.00	9742.00
		Mid range	50	0	8935.70	9615.00
		High range	50	0	8935.40	9643.00
	15MHz	Low range	75	0	13460.10	1469.30
		Mid range	75	0	13469.40	14743.00
		High range	75	0	13453.60	14906.00
	20MHz	Low range	100	0	17891.50	19317.00
		Mid range	100	0	17918.90	19391.00
		High range	100	0	17868.50	19225.00
EUT Mode	Channel Bandwidth	Channel	RB Configure		99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
			RB Size	RB Offset		
LTE Band 13	5MHz	Low range	25	0	4573.70	5953.00
		Mid range	25	0	4567.70	5850.00
		High range	25	0	4544.20	5858.00
	10MHz	Mid range	50	0	8927.20	10853.00

16QAM mode：

EUT Mode	Channel Bandwidth	Channel	RB Configure		99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
			RB Size	RB Offset		
LTE Band 4	1.4MHz	Low range	6	0	1096.30	1274.00
		Mid range	6	0	1104.70	1286.00
		High range	6	0	1106.50	1264.00
	3MHz	Low range	15	0	2696.20	2953.00
		Mid range	15	0	2686.20	2914.00
		High range	15	0	2679.50	2904.00
	5MHz	Low range	25	0	4528.80	5064.00
		Mid range	25	0	4543.10	5027.00
		High range	25	0	4534.70	5070.00
	10MHz	Low range	50	0	8987.80	10752.00
		Mid range	50	0	8948.30	10755.00
		High range	50	0	8978.20	10655.00
	15MHz	Low range	75	0	13515.80	15855.00
		Mid range	75	0	13492.80	15955.00
		High range	75	0	13508.20	16258.00
	20MHz	Low range	100	0	17838.50	20495.00
		Mid range	100	0	17838.30	21257.00
		High range	100	0	17848.10	21615.00
EUT Mode	Channel Bandwidth	Channel	RB Configure		99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
			RB Size	RB Offset		
LTE Band 13	5MHz	Low range	25	0	4579.70	5715.00
		Mid range	25	0	4537.30	5951.00
		High range	25	0	4524.50	5655.00
	10MHz	Mid range	50	0	8944.80	10957.00

Test plot as follows:

QPSK mode:

Test band: LTE Band 4	Channel Bandwidth: 1.4MHz

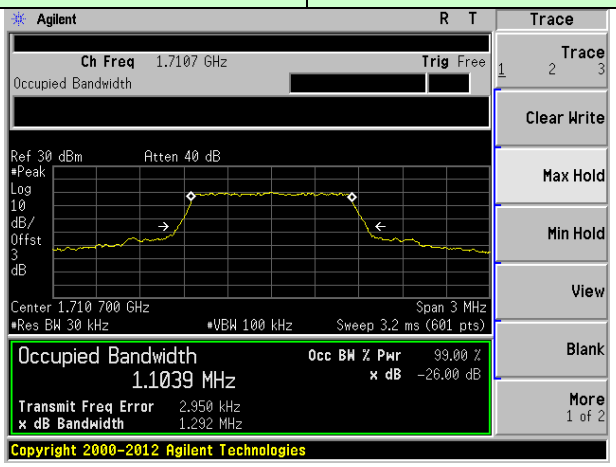

Lowest channel

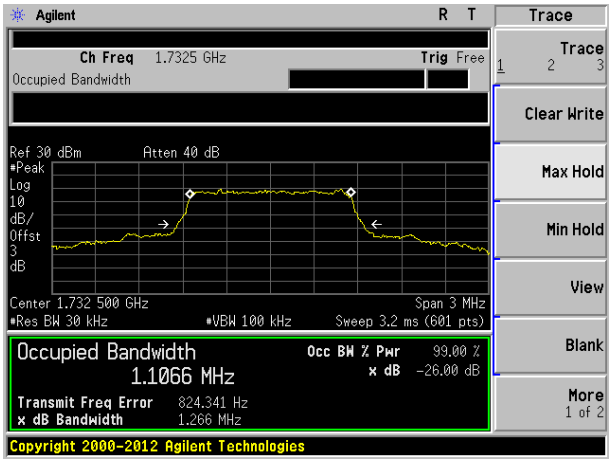

Middle channel

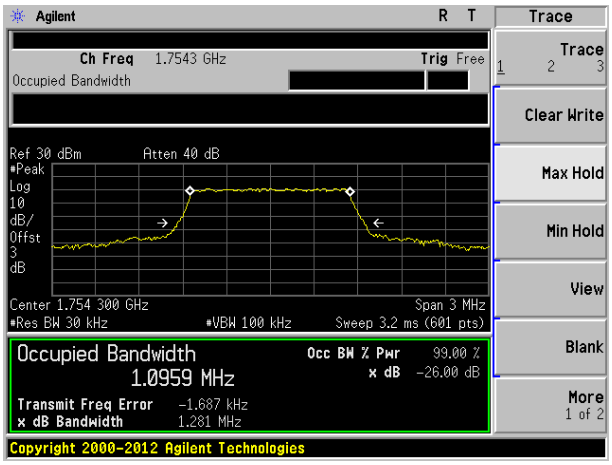

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 3MHz

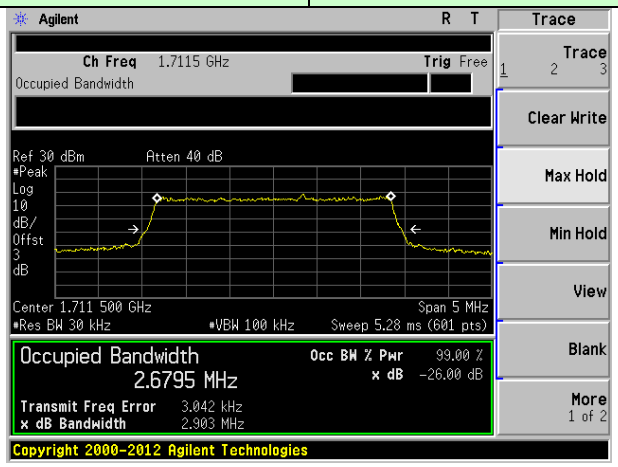

Lowest channel

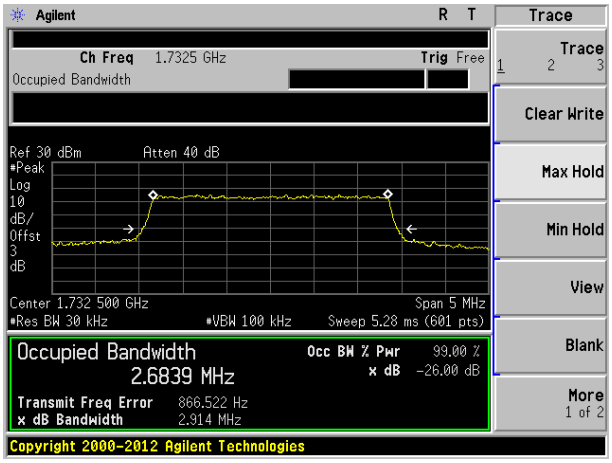

Middle channel

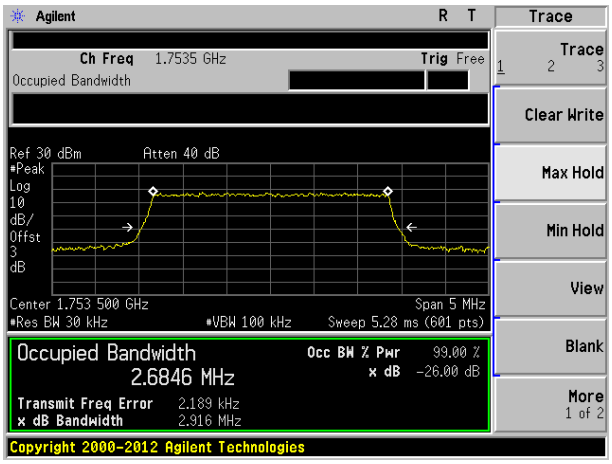

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 5MHz

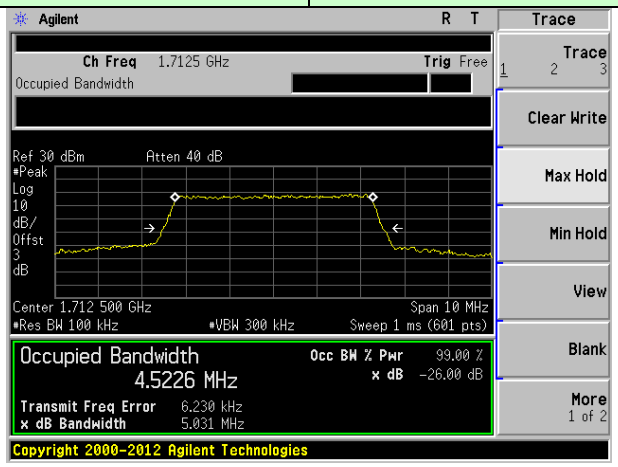

Lowest channel

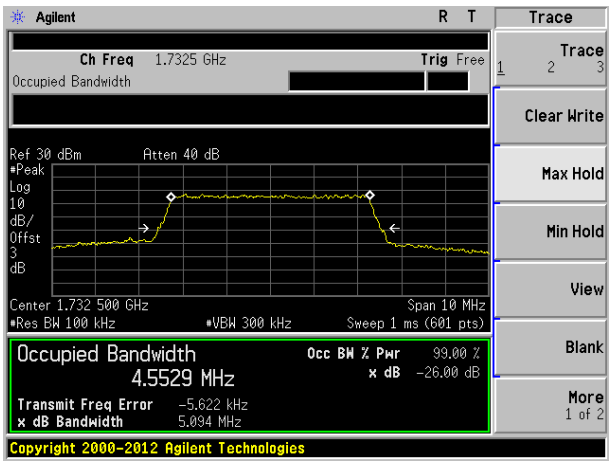

Middle channel

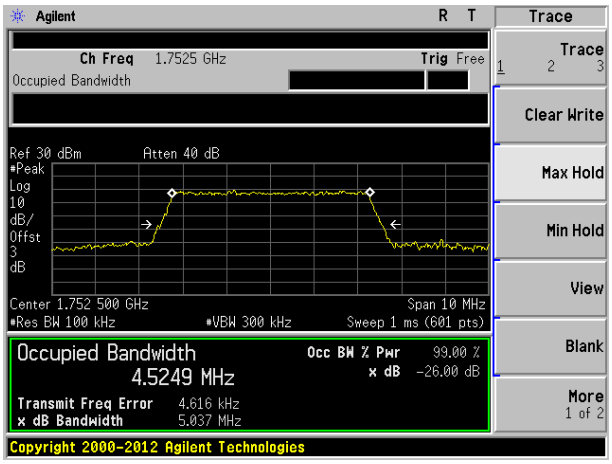

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 10MHz

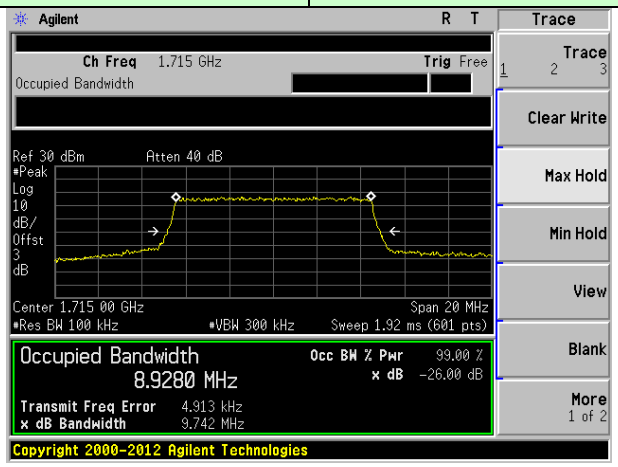

Lowest channel

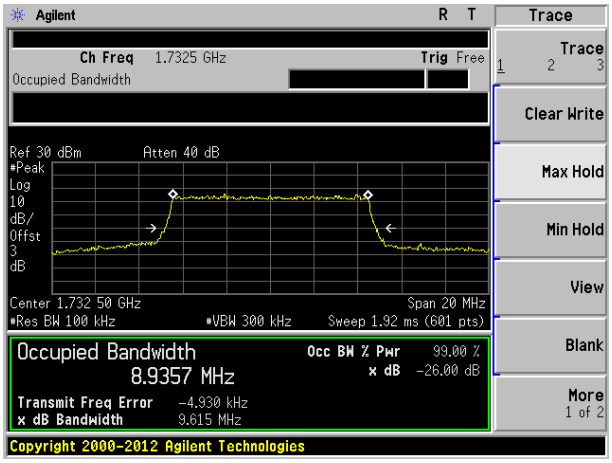

Middle channel

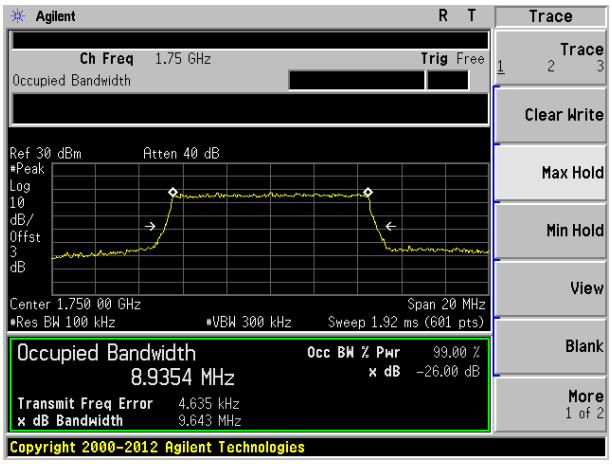

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 15MHz

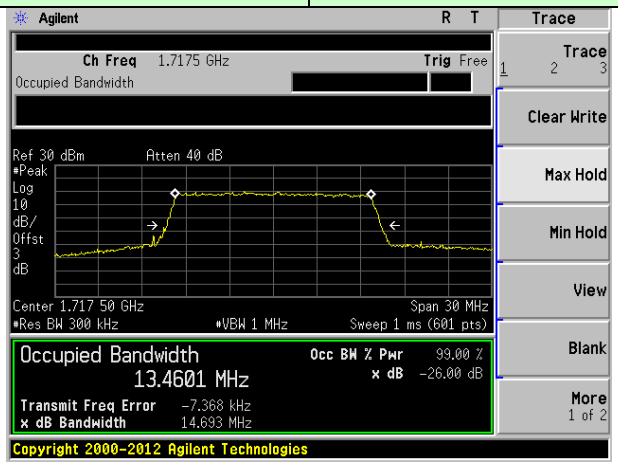

Lowest channel

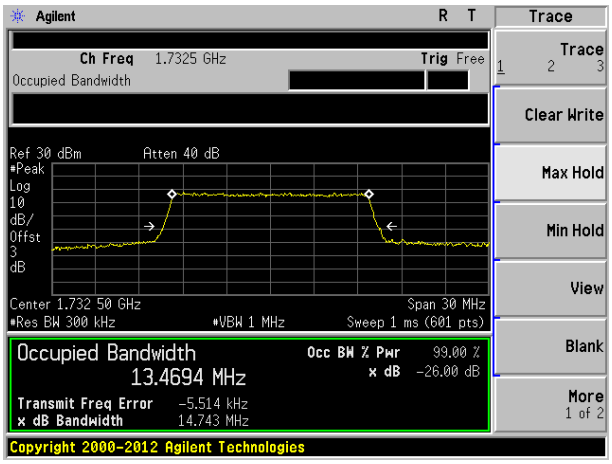

Middle channel

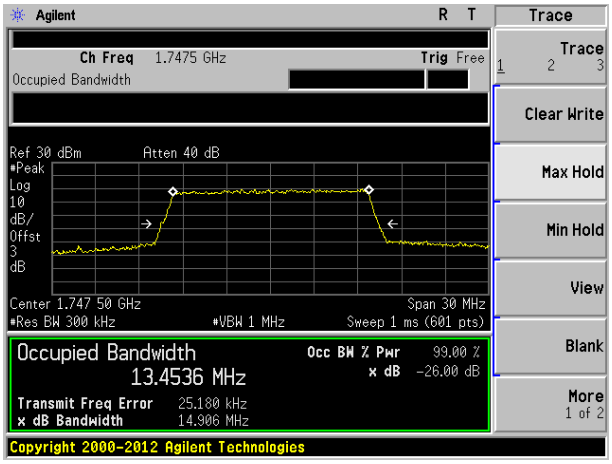

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 20MHz

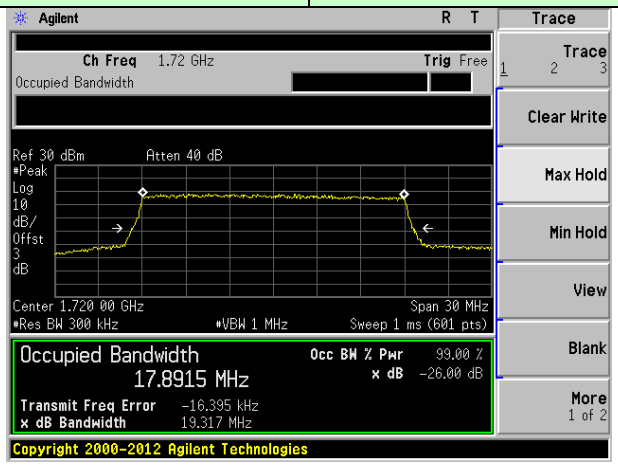

Lowest channel

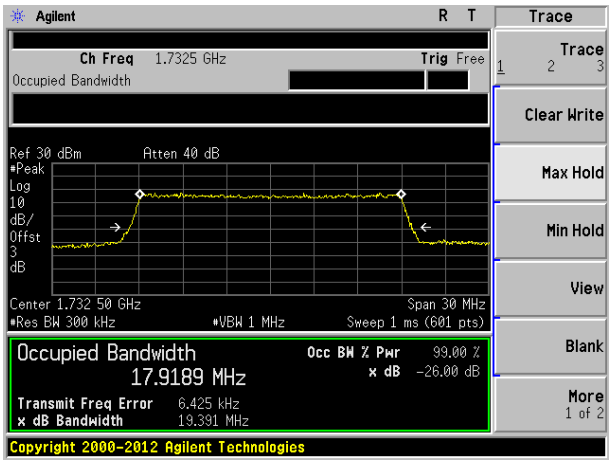

Middle channel

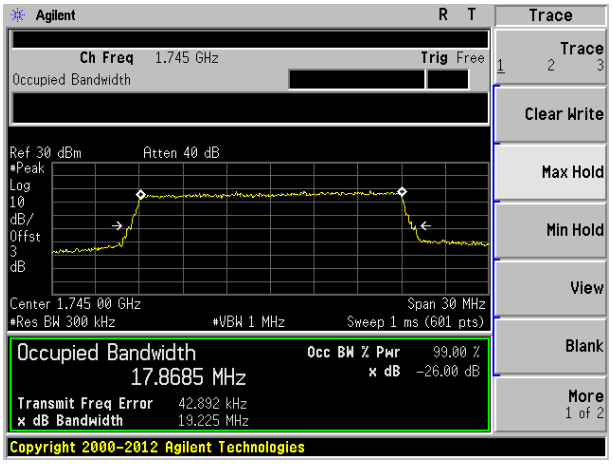

Highest channel

Test band: LTE Band 13	Channel Bandwidth: 5MHz

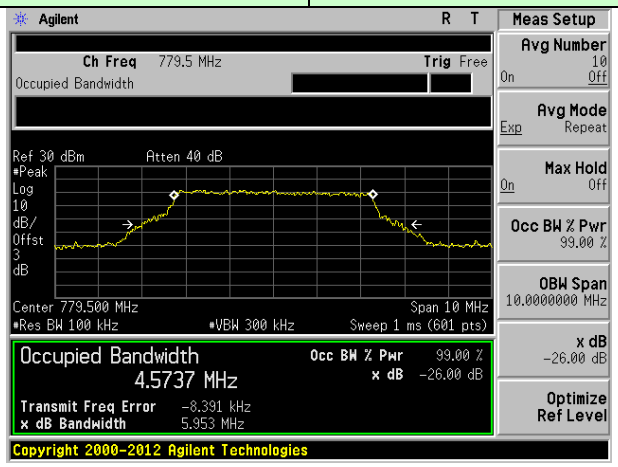

Lowest channel

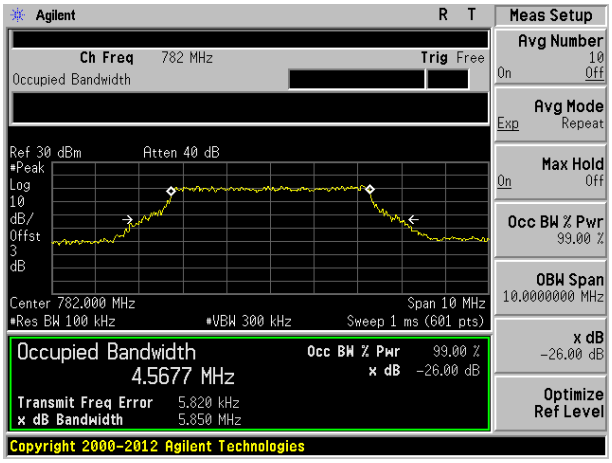

Middle channel

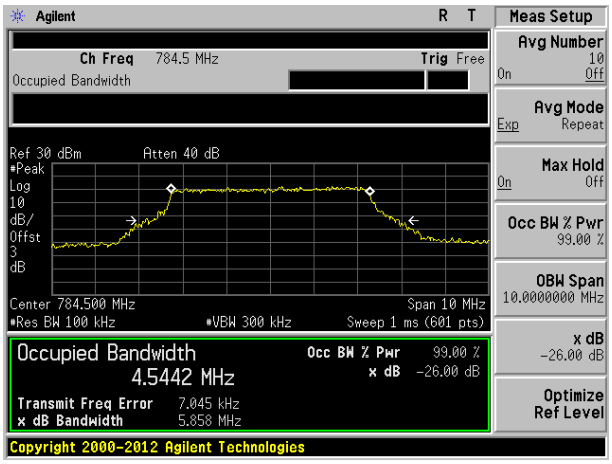

Highest channel

Test band: LTE Band 13	Channel Bandwidth: 10MHz

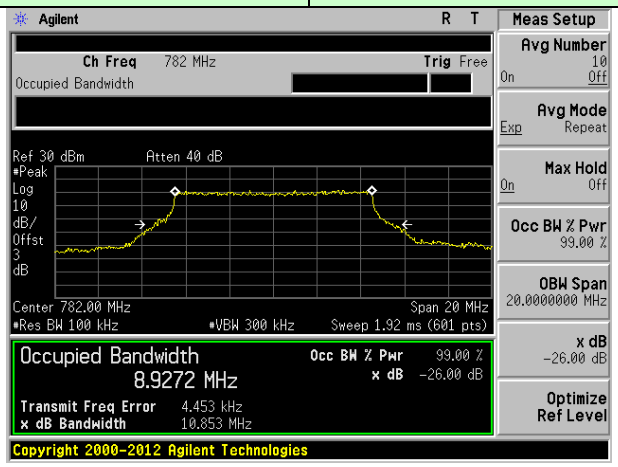

Middle channel

16QAM mode:

Test band: LTE Band 4	Channel Bandwidth: 1.4MHz

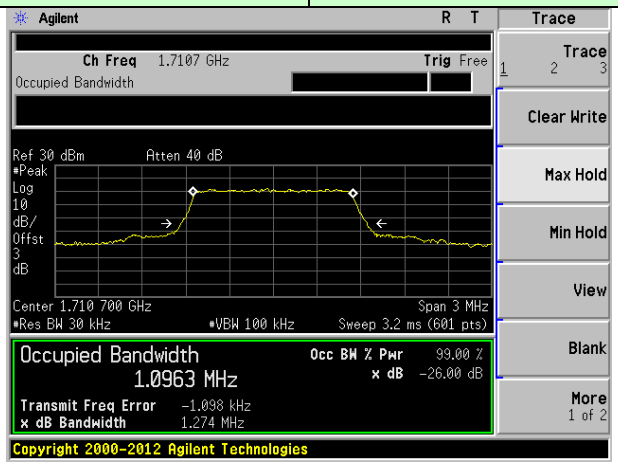

Lowest channel

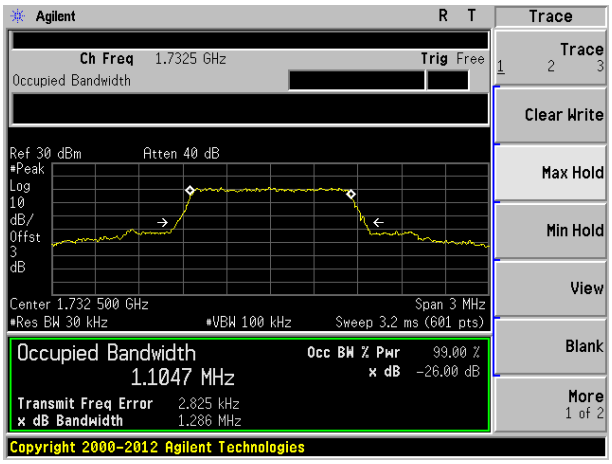

Middle channel

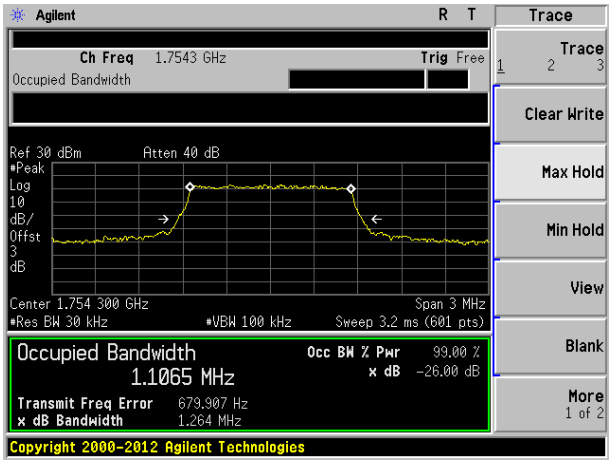

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 3MHz

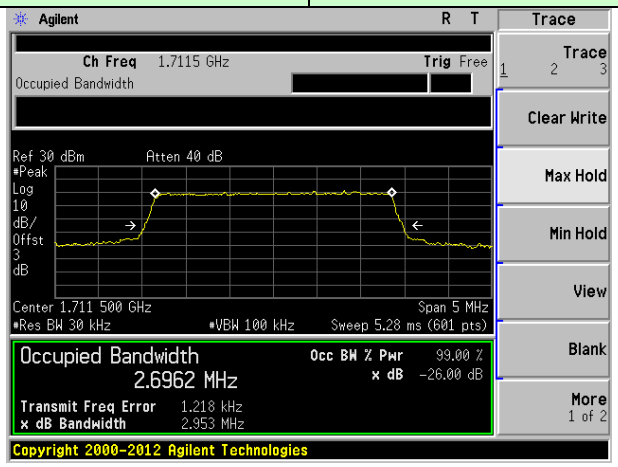

Lowest channel

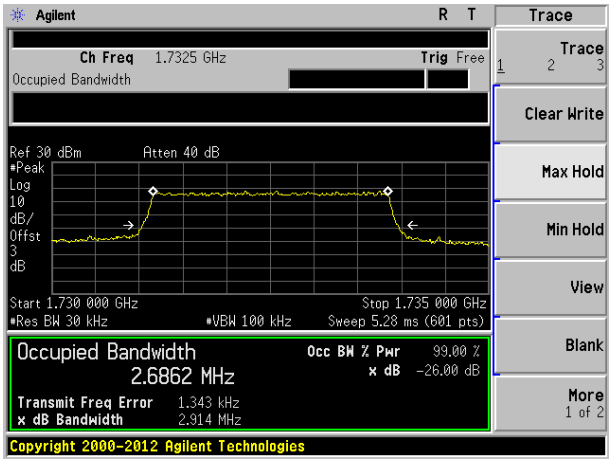

Middle channel

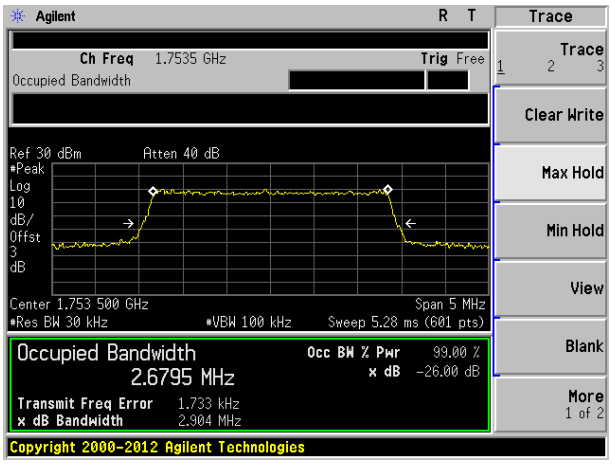

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 5MHz

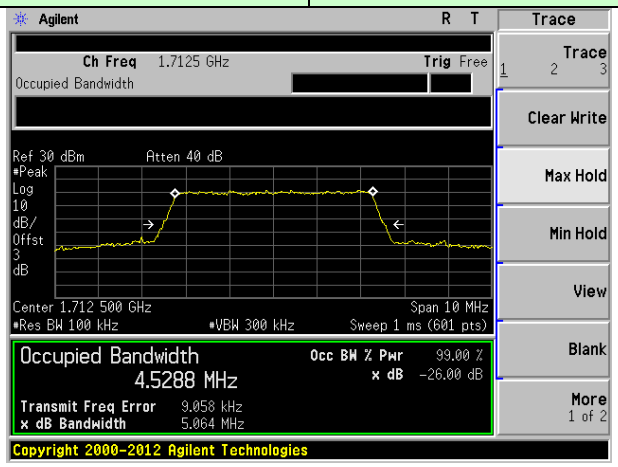

Lowest channel

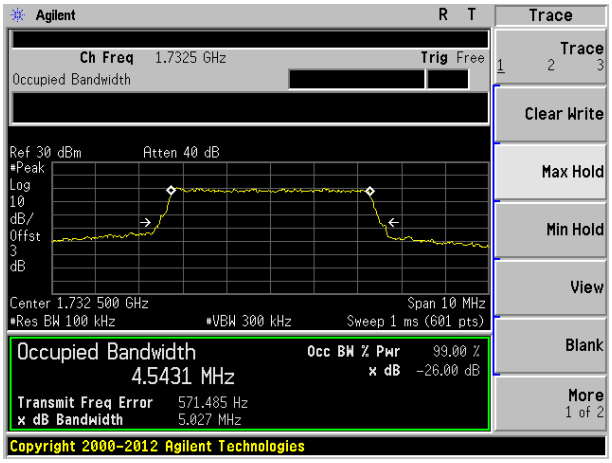

Middle channel

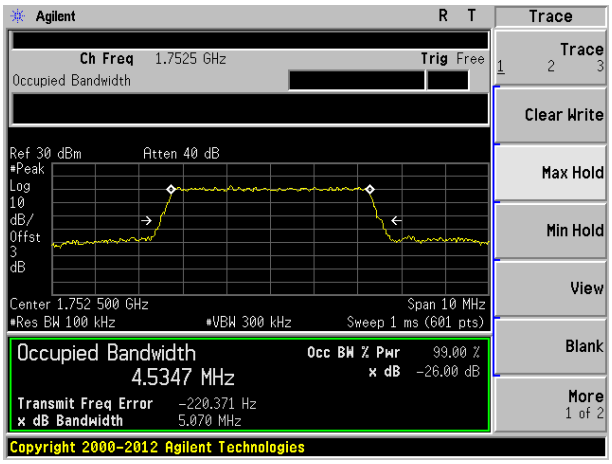

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 10MHz

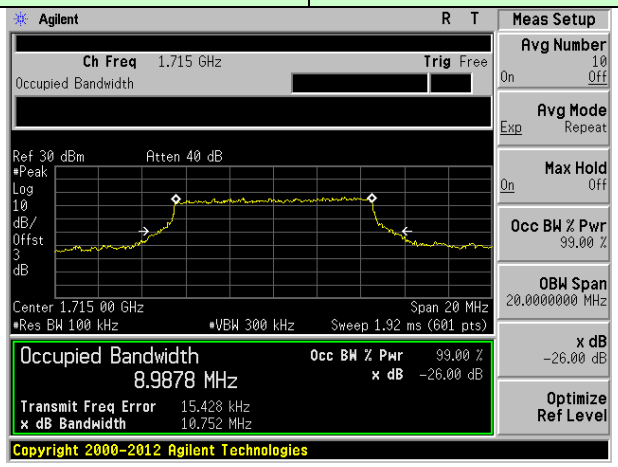

Lowest channel

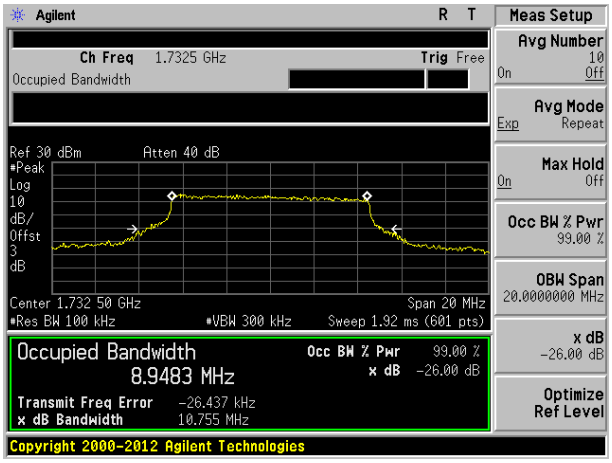

Middle channel

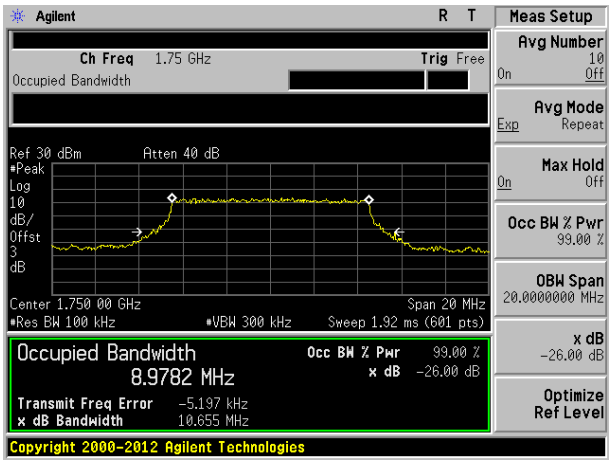

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 15MHz

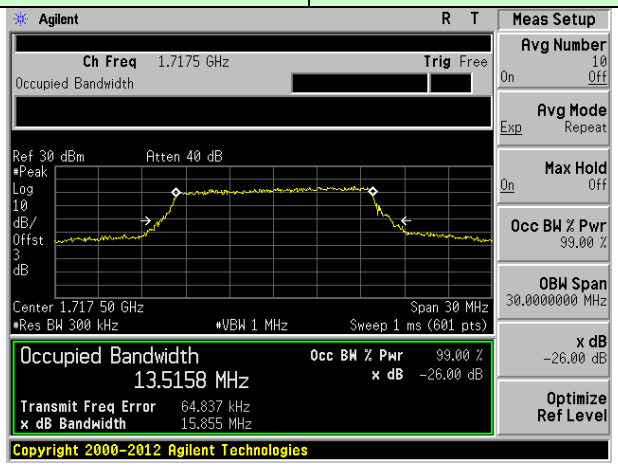

Lowest channel

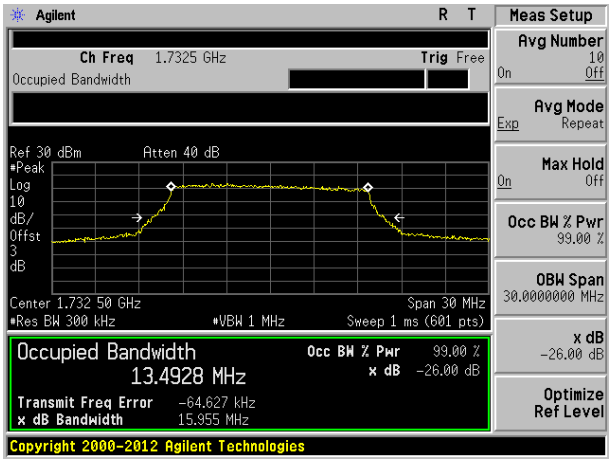

Middle channel

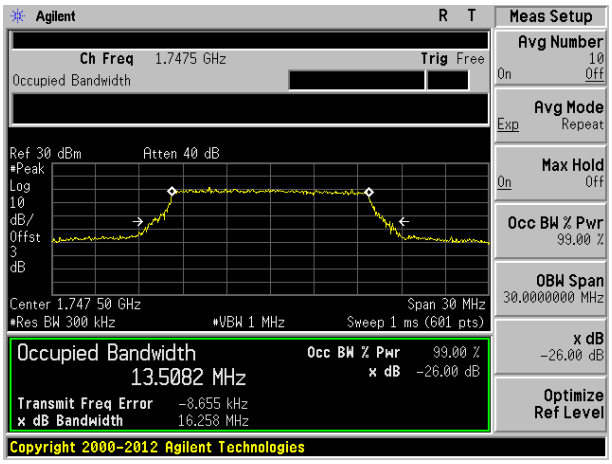

Highest channel

Test band: LTE Band 4	Channel Bandwidth: 20MHz

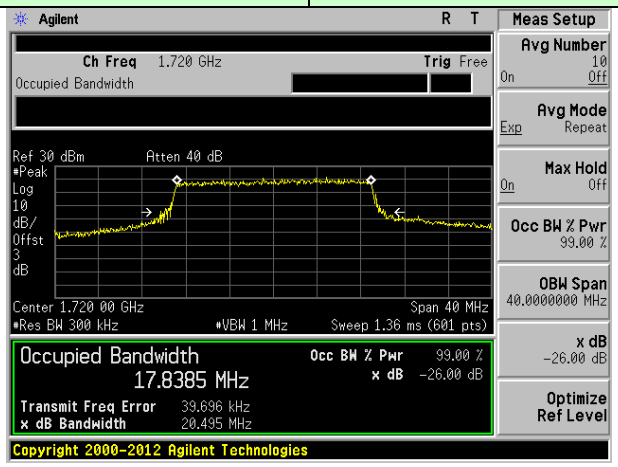

Lowest channel

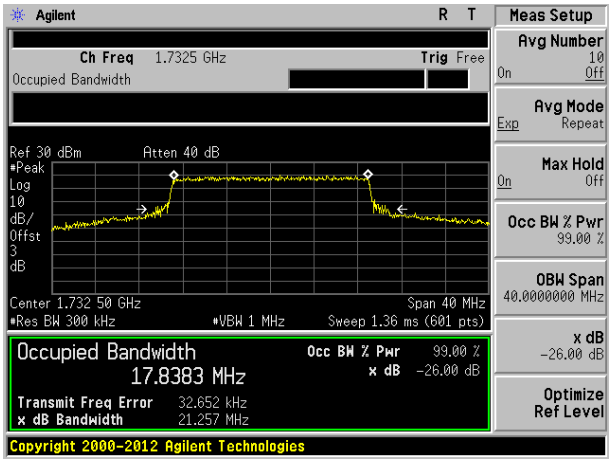

Middle channel

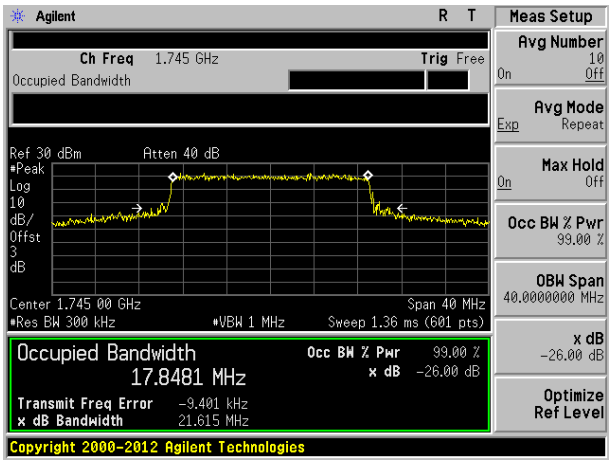

Highest channel

Test band: LTE Band 13	Channel Bandwidth: 5MHz

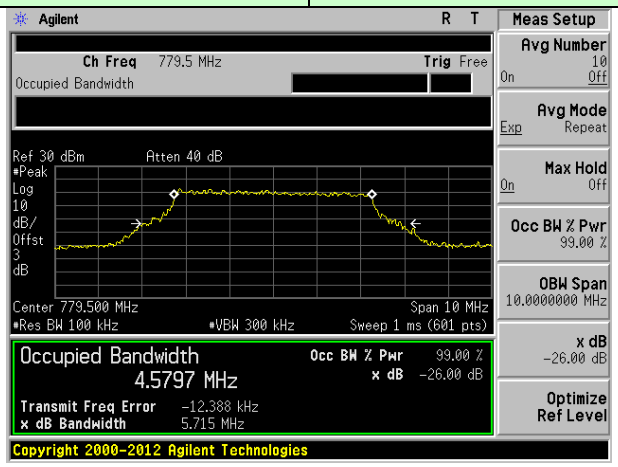

Lowest channel

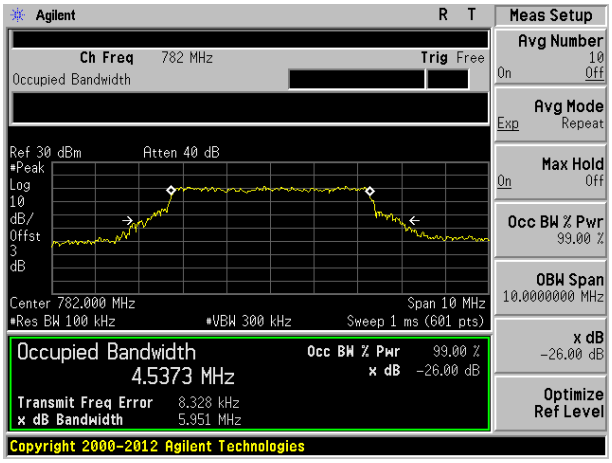

Middle channel

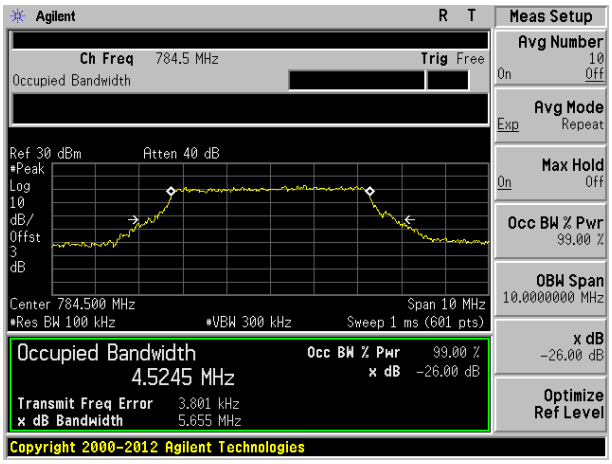

Highest channel

Test band: LTE Band 13	Channel Bandwidth: 10MHz

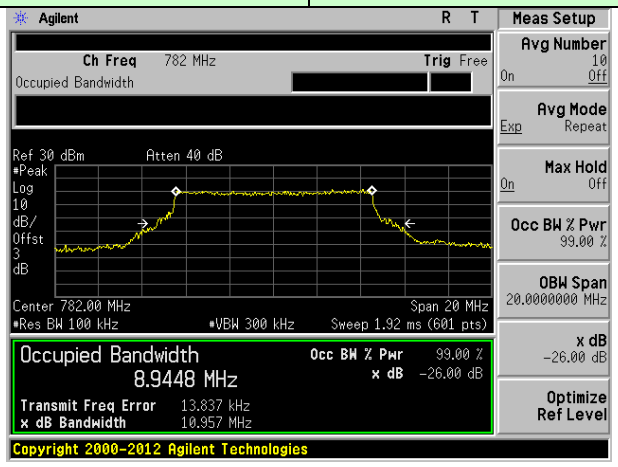

Middle channel

7.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

7.7 Out of band emission at antenna terminals

Test Requirement:	FCC Part 27.53(h)/(c)(2)
Test Method:	FCC part2.1051
Limit:	-13dBm For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals.
Test setup:	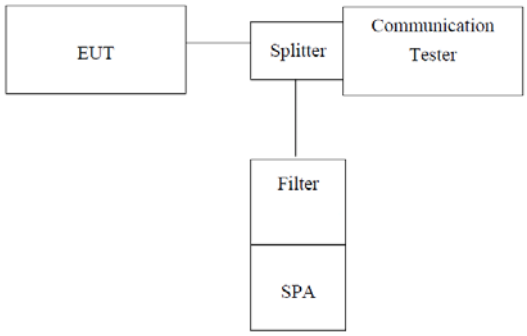 *Note: Measurement setup for testing on Antenna connector*
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Test plot as follows:

QPSK mode:

Test Mode: LTE Band 4	Channel Bandwidth: 1.4MHz

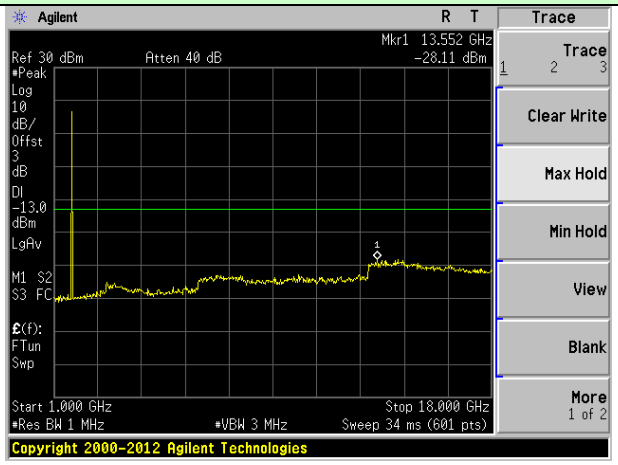

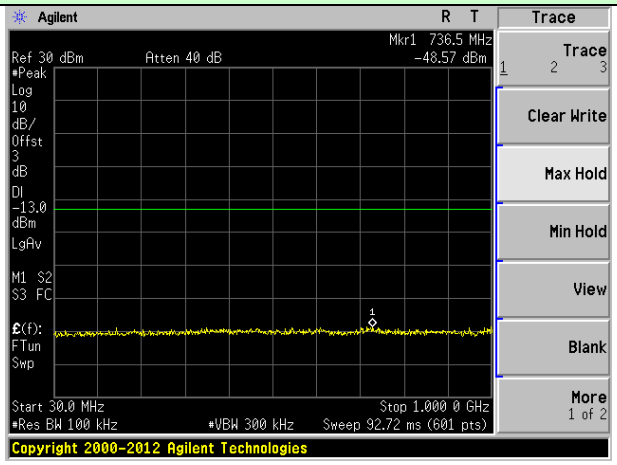

Lowest channel

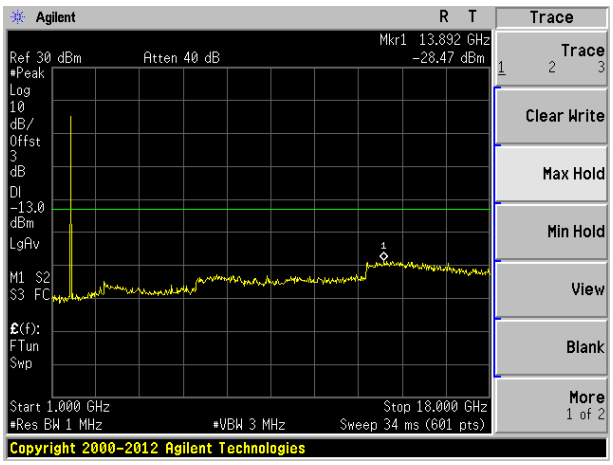

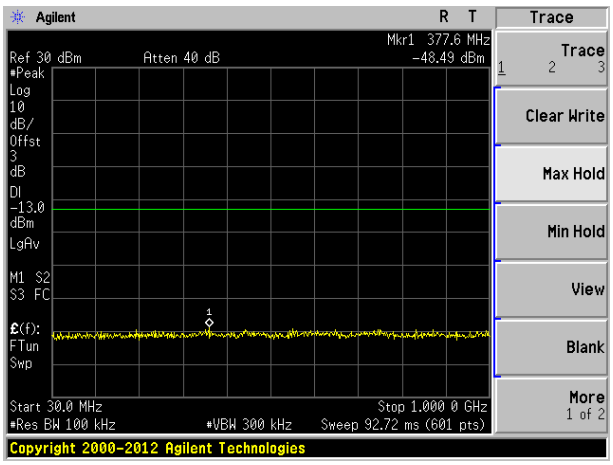

Middle channel

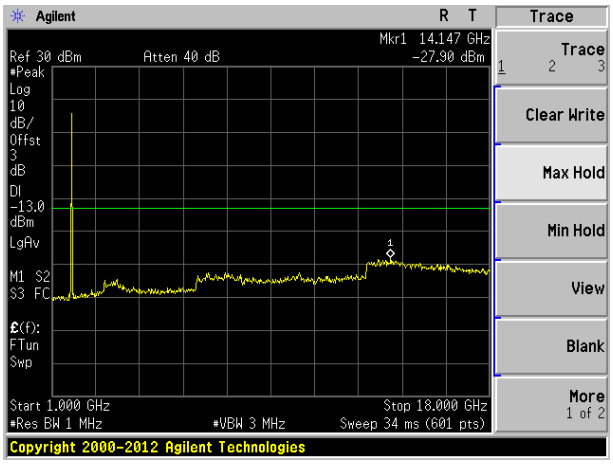

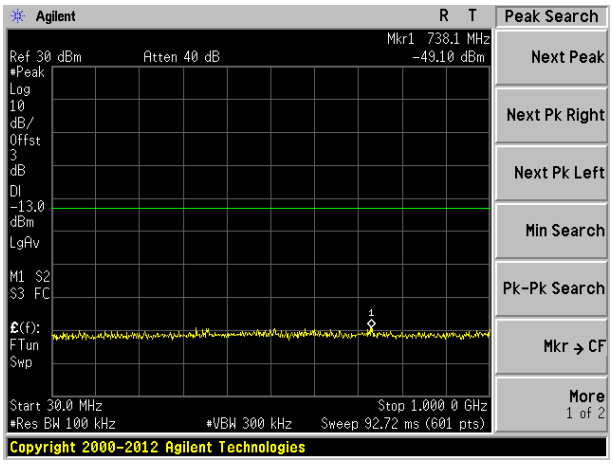

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 3MHz

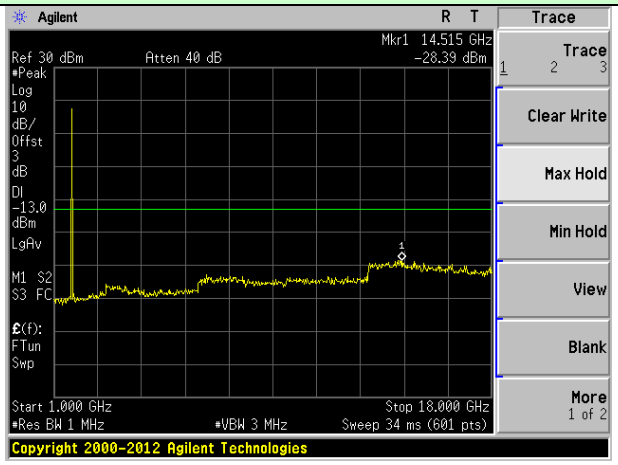

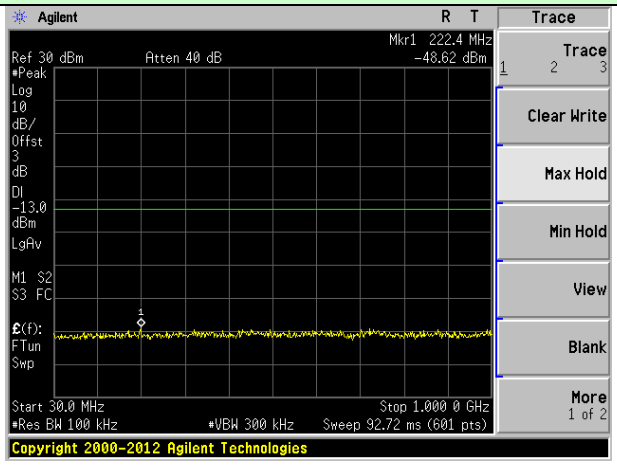

Lowest channel

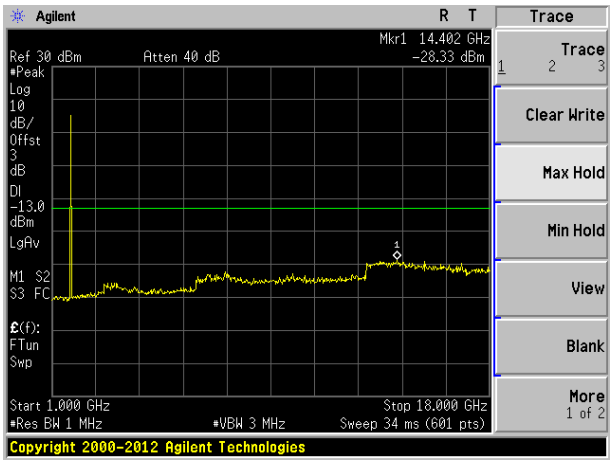

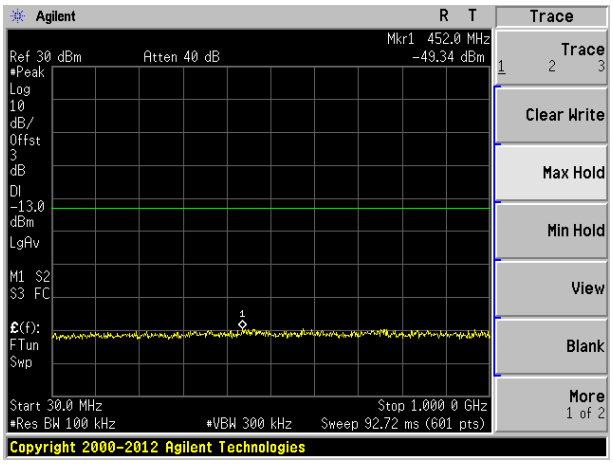

Middle channel

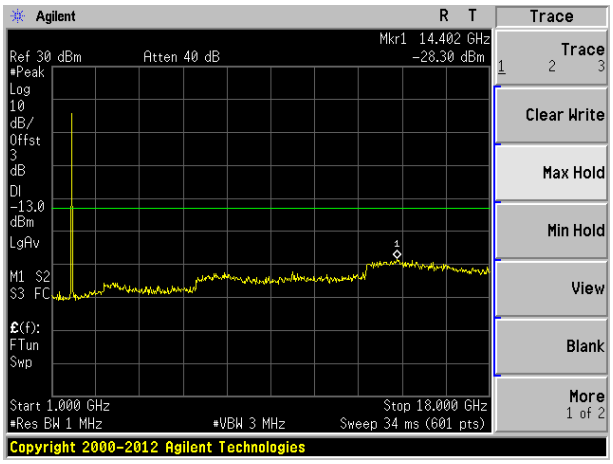

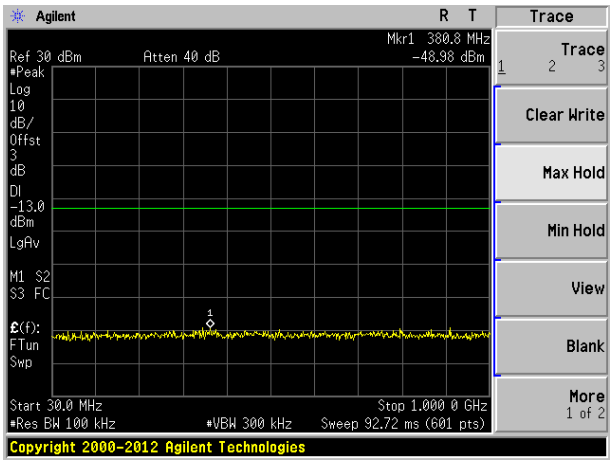

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 5MHz

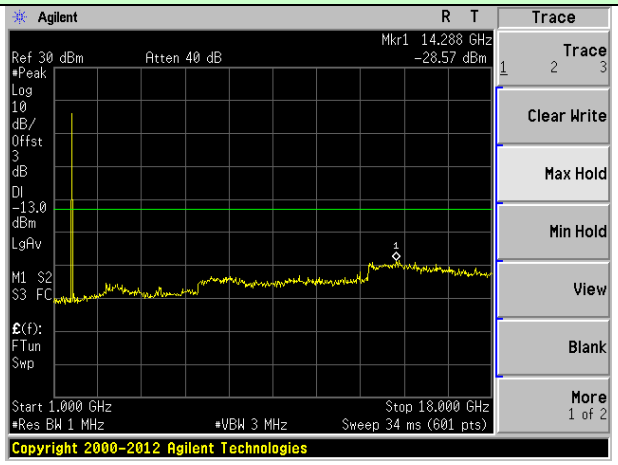

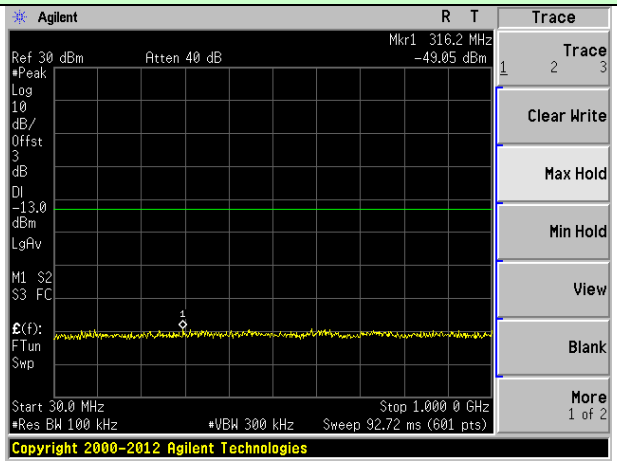

Lowest channel

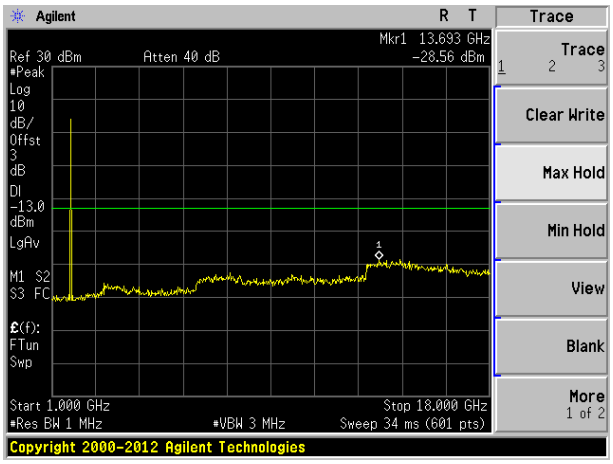

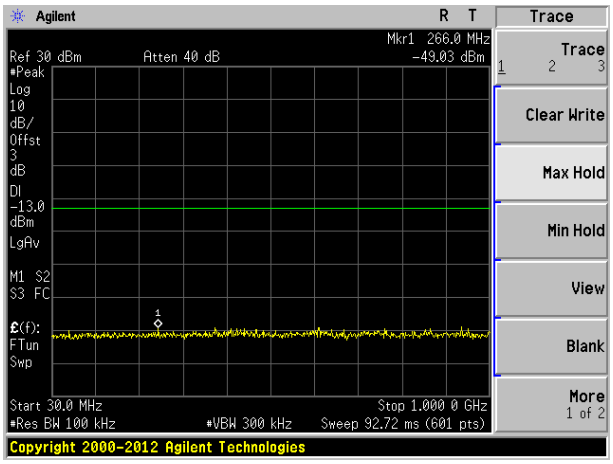

Middle channel

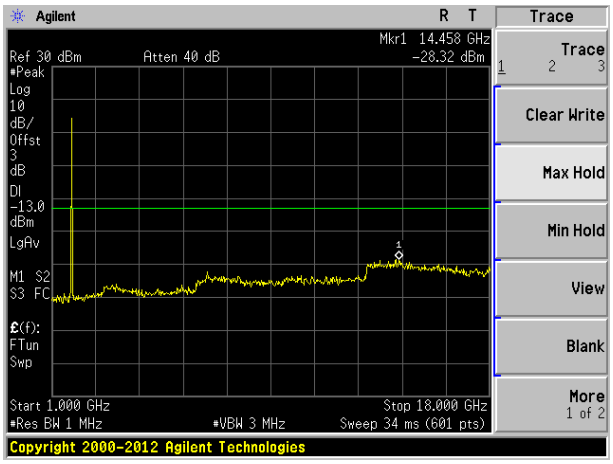

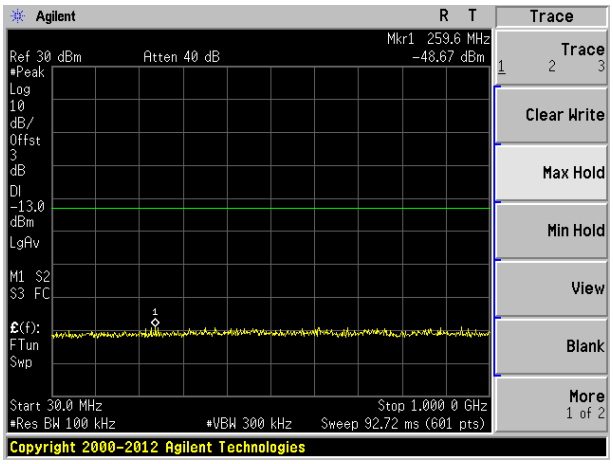

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 10MHz

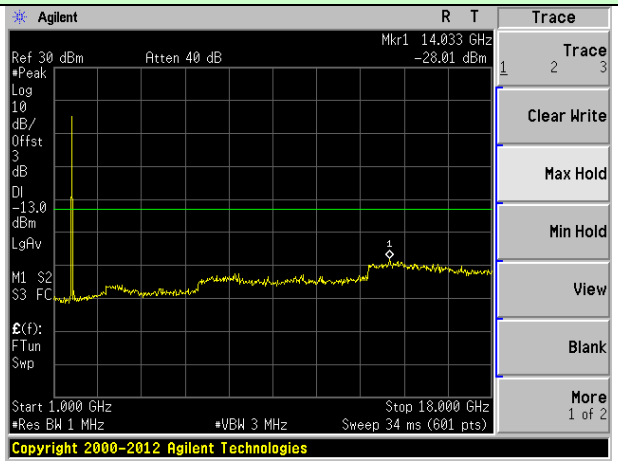

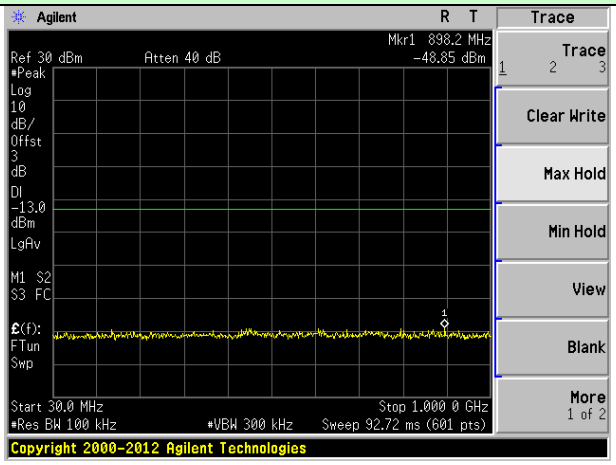

Lowest channel

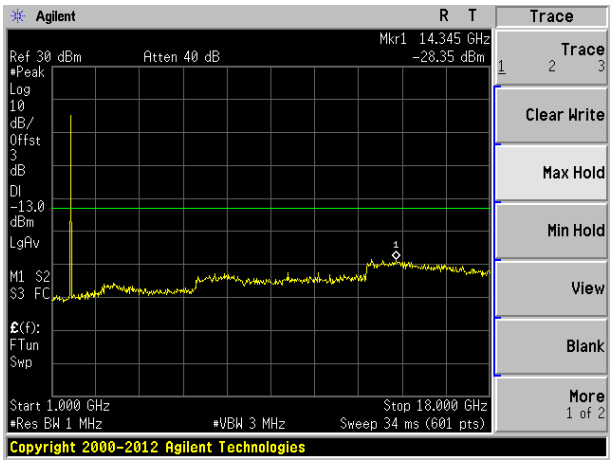

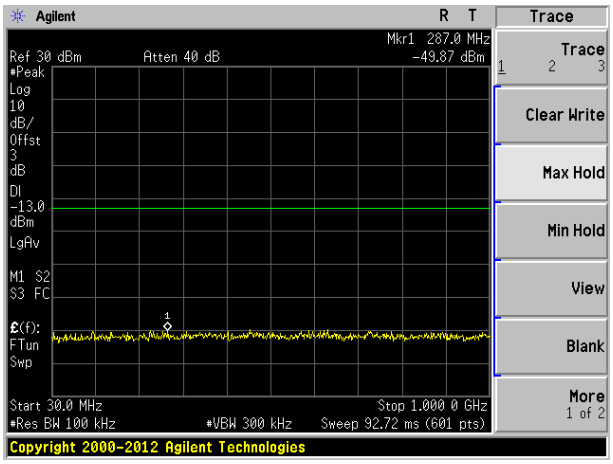

Middle channel

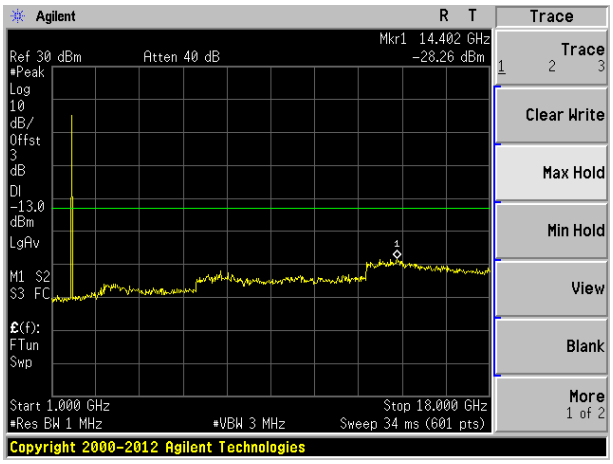

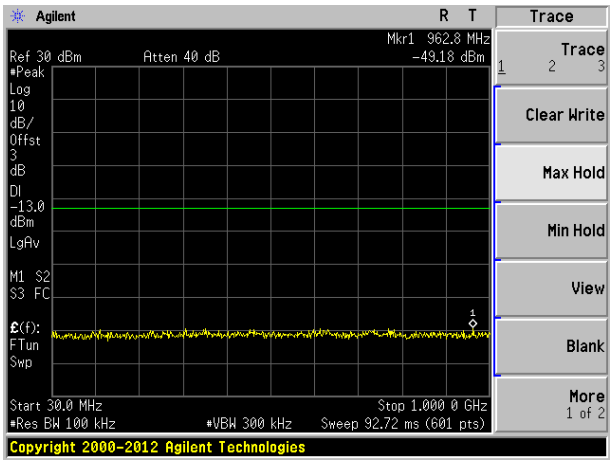

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 15MHz

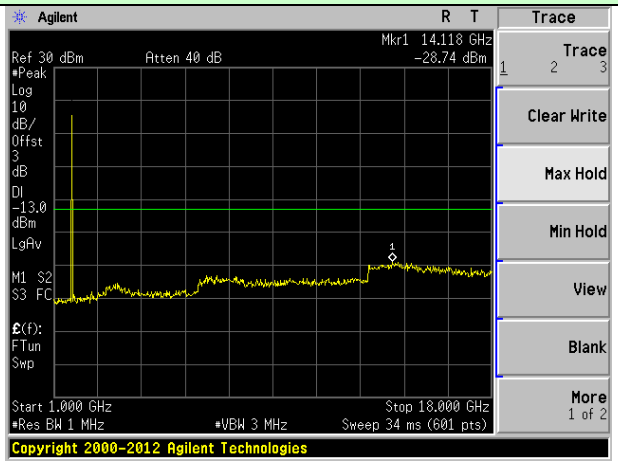

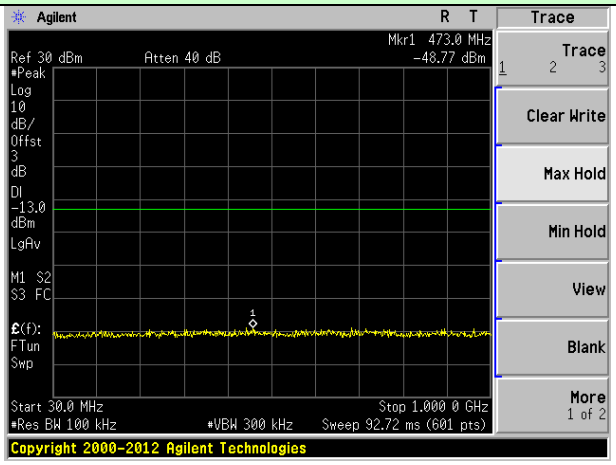

Lowest channel

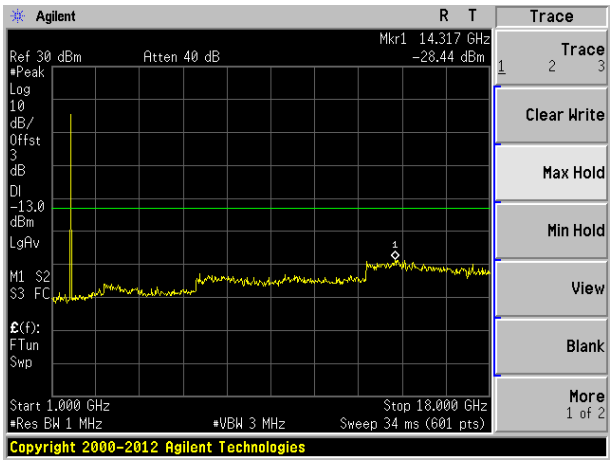

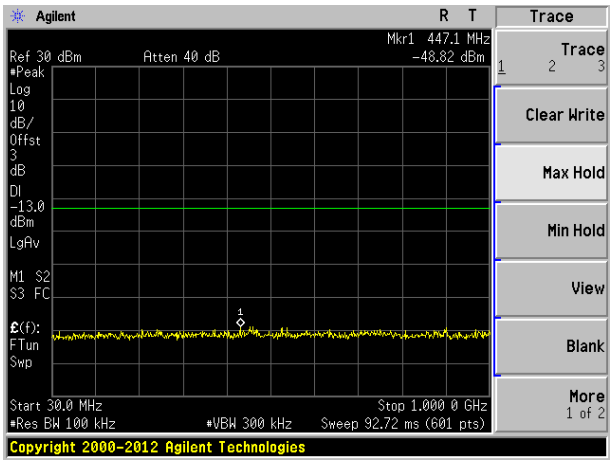

Middle channel

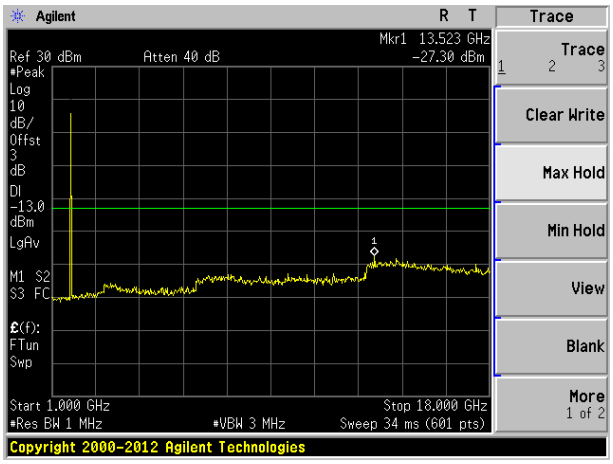

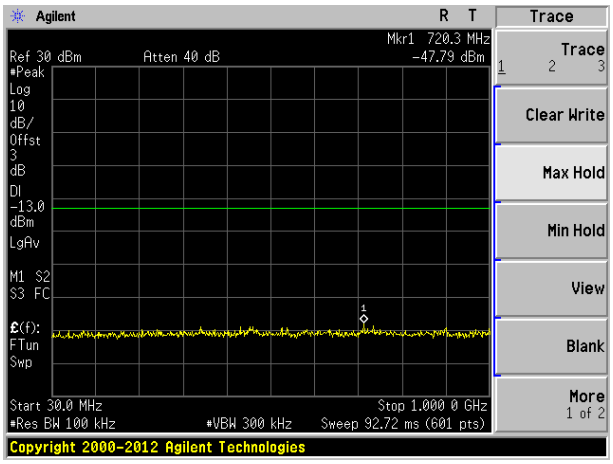

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 20MHz

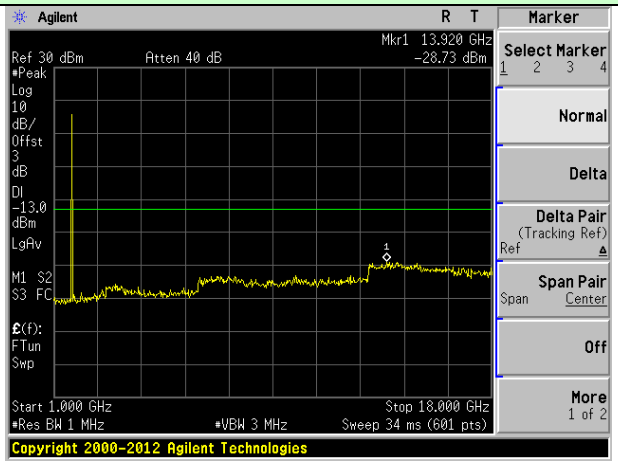

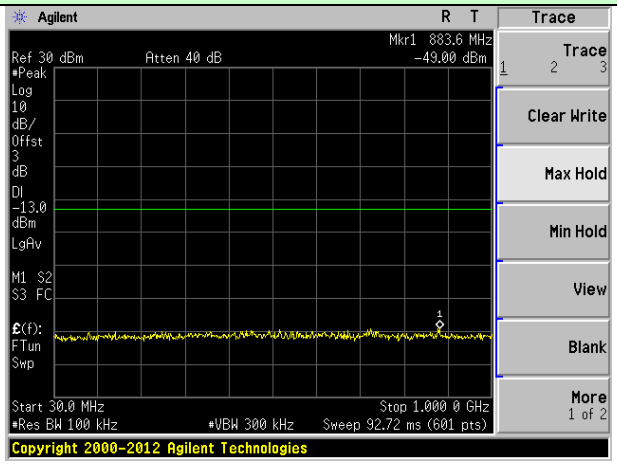

Lowest channel

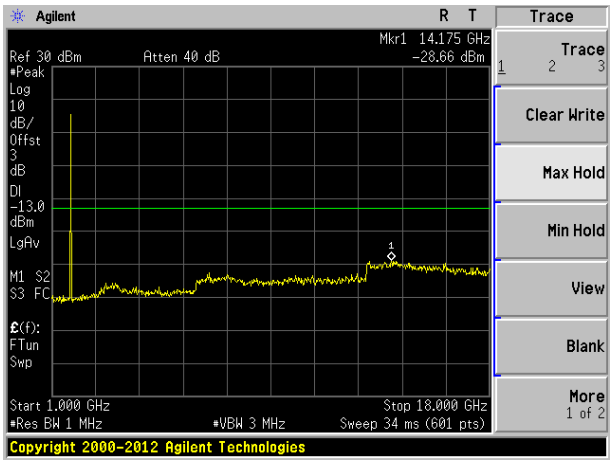

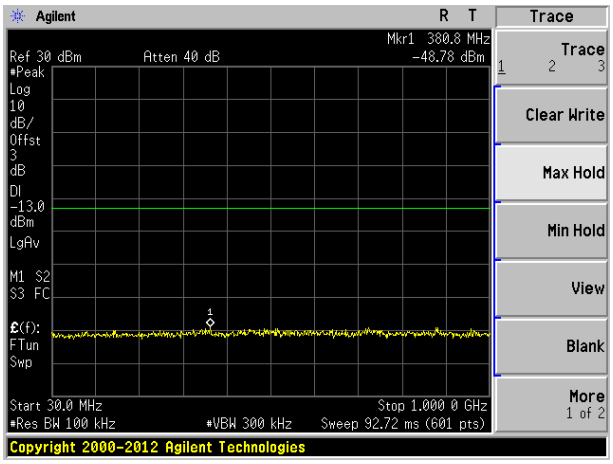

Middle channel

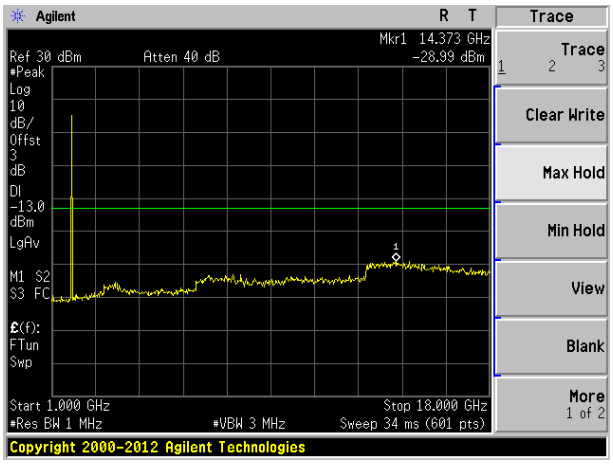

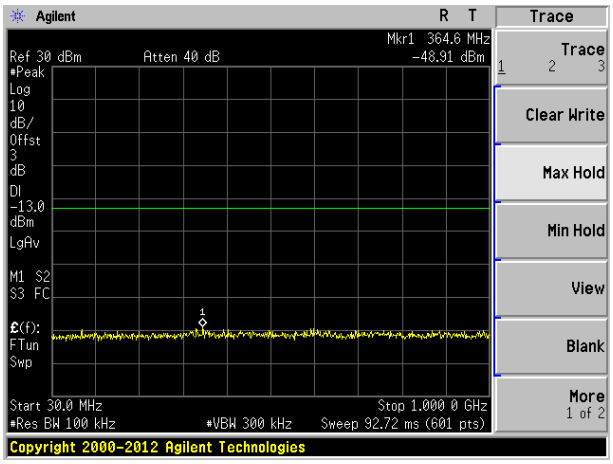

Highest channel

Test Mode: LTE Band 13	Channel Bandwidth: 5MHz

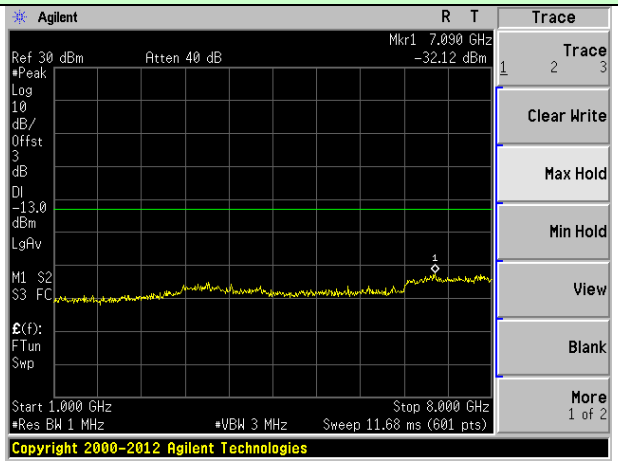

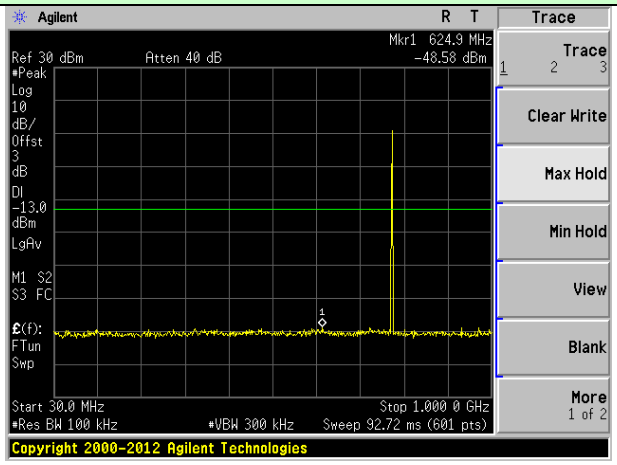

Lowest channel

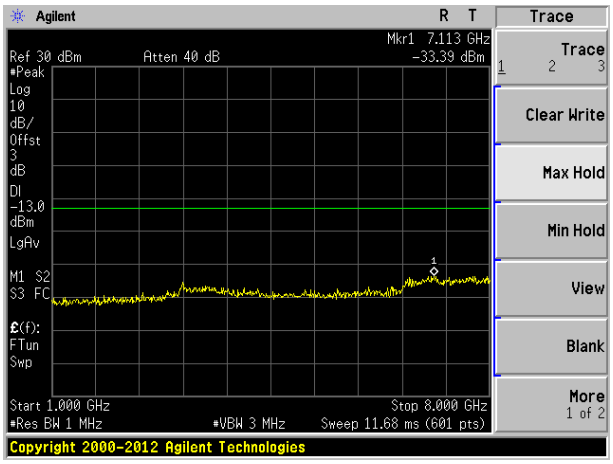

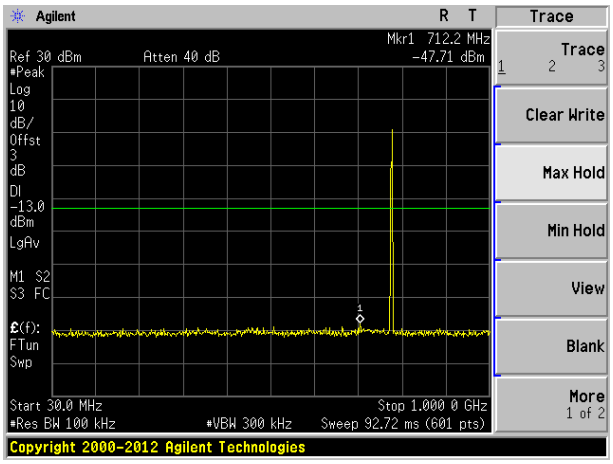

Middle channel

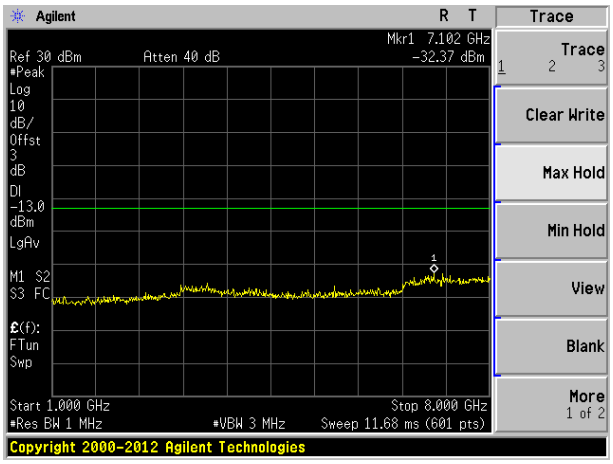

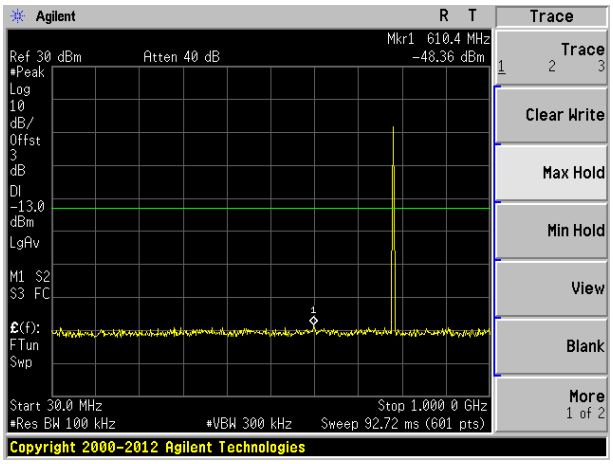

Highest channel

Test Mode: LTE Band 13	Channel Bandwidth: 10MHz
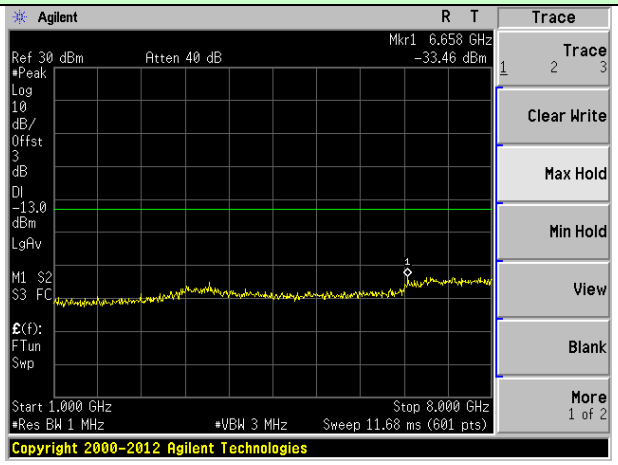	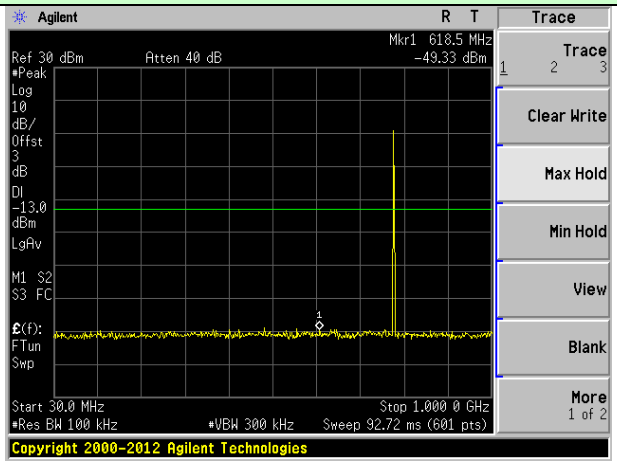

Middle channel

16QAM mode:

Test Mode: LTE Band 4	Channel Bandwidth: 1.4MHz

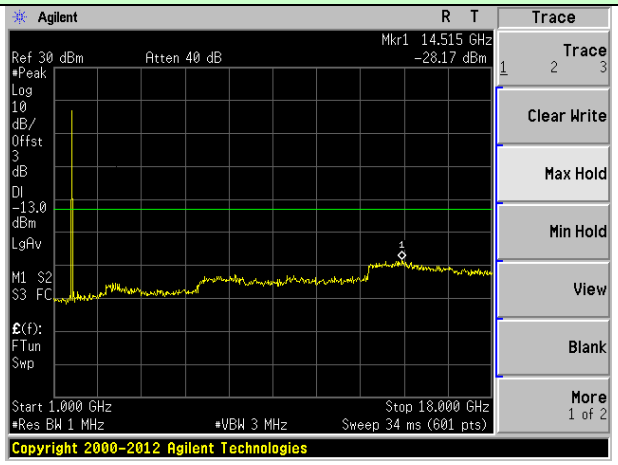

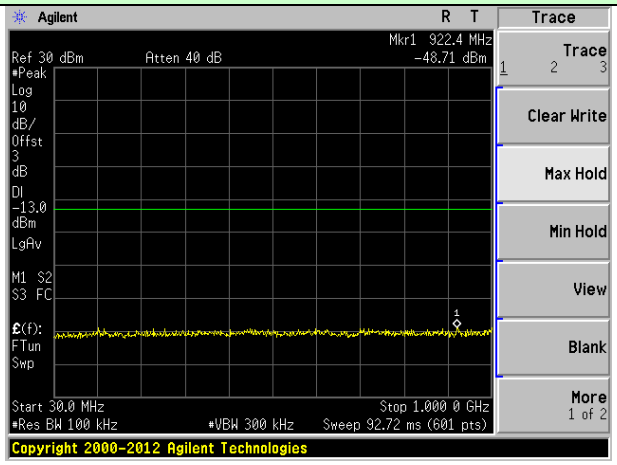

Lowest channel

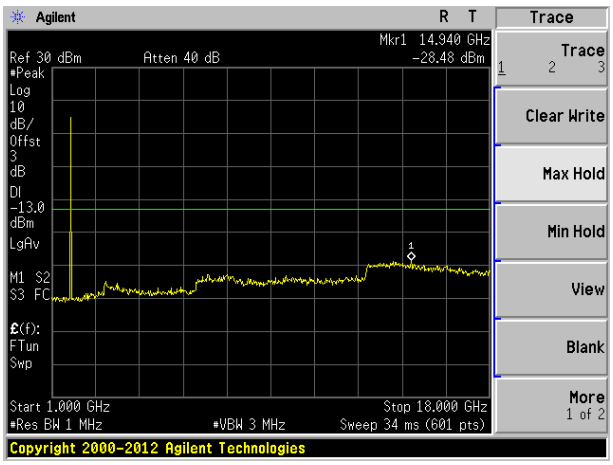

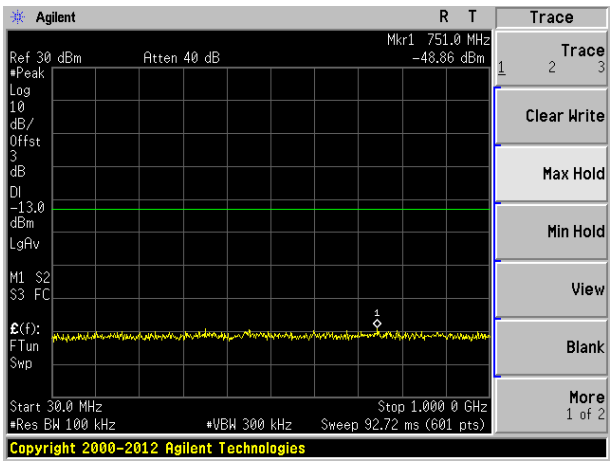

Middle channel

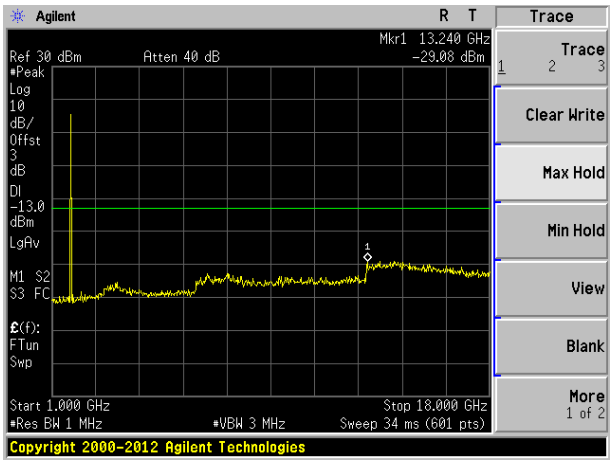

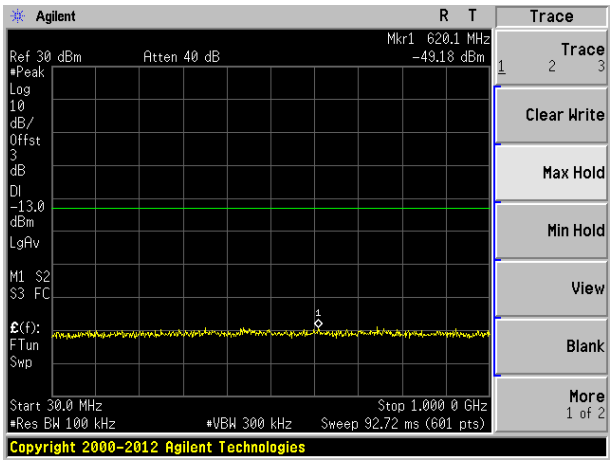

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 3MHz

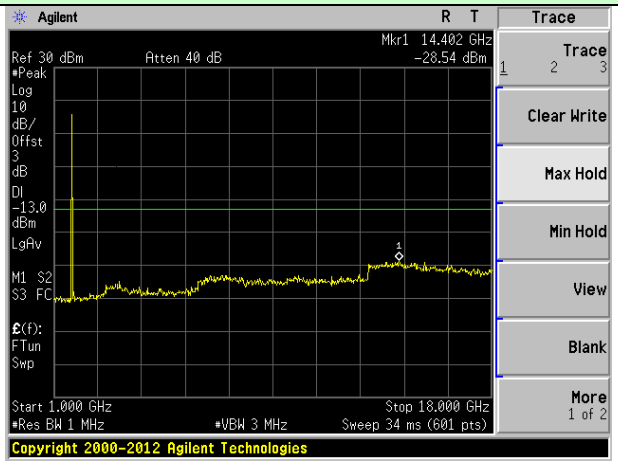

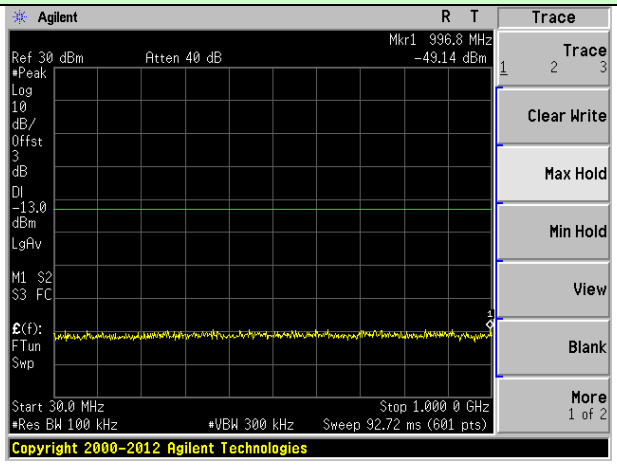

Lowest channel

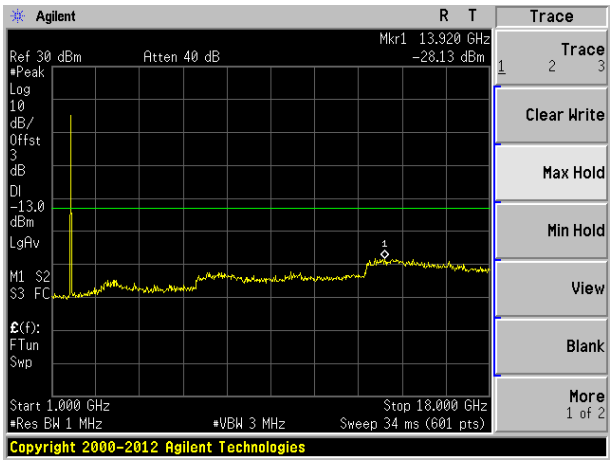

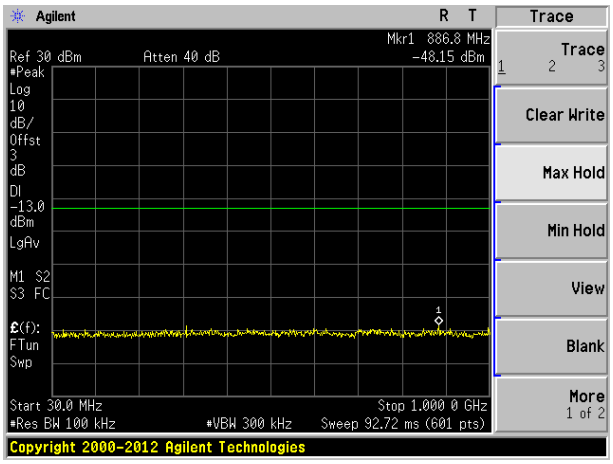

Middle channel

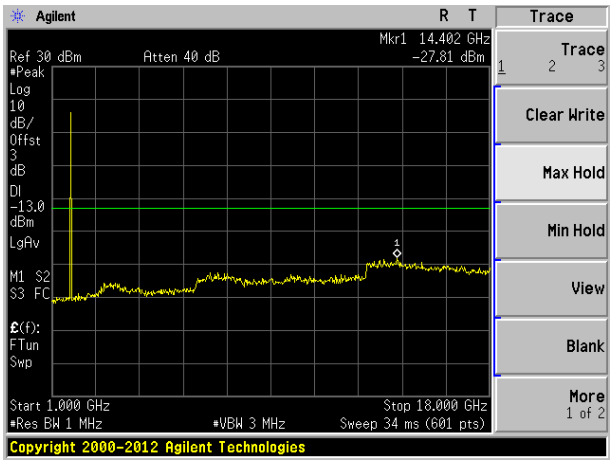

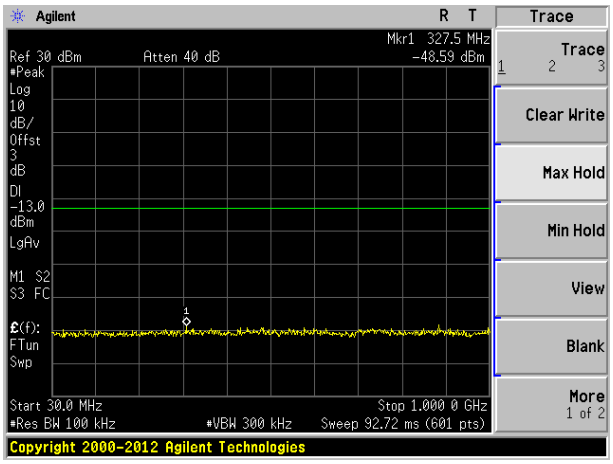

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 5MHz

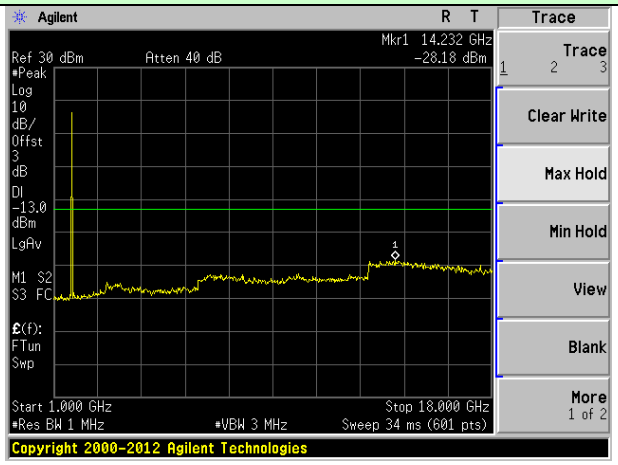

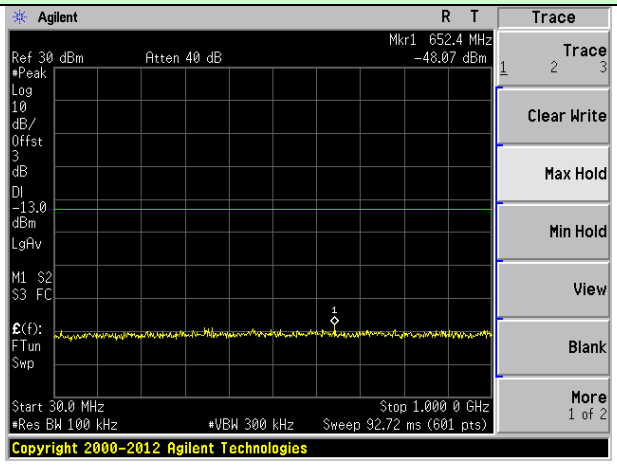

Lowest channel

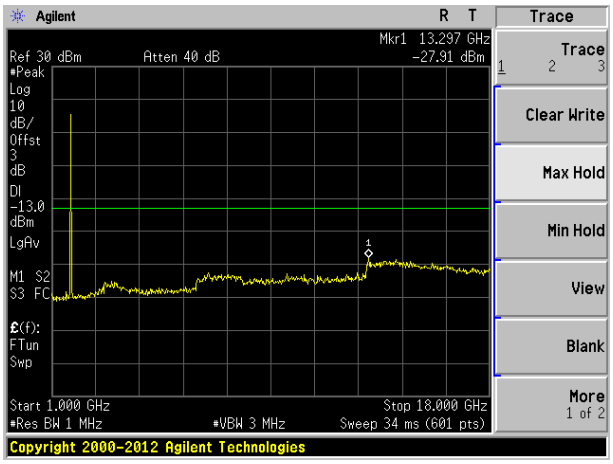

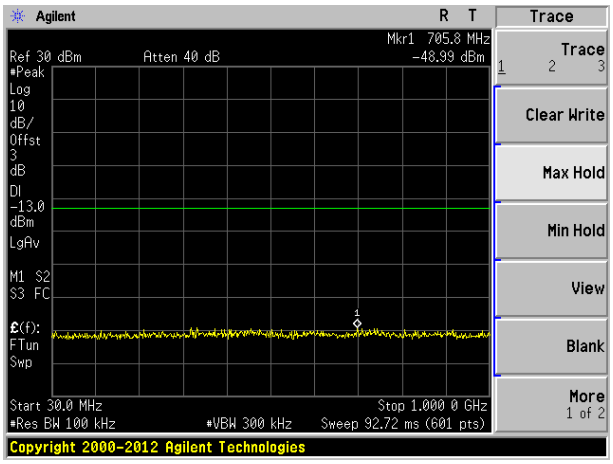

Middle channel

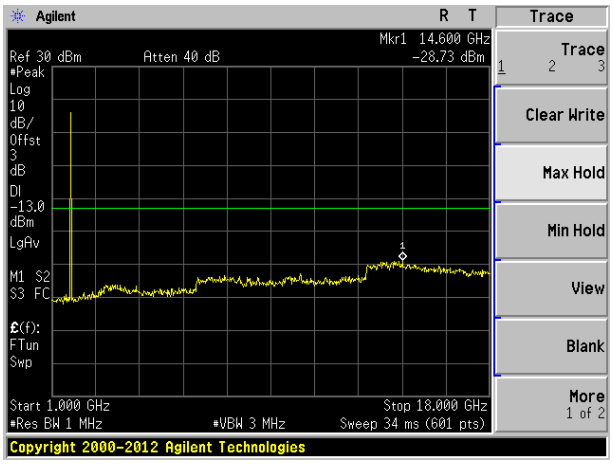

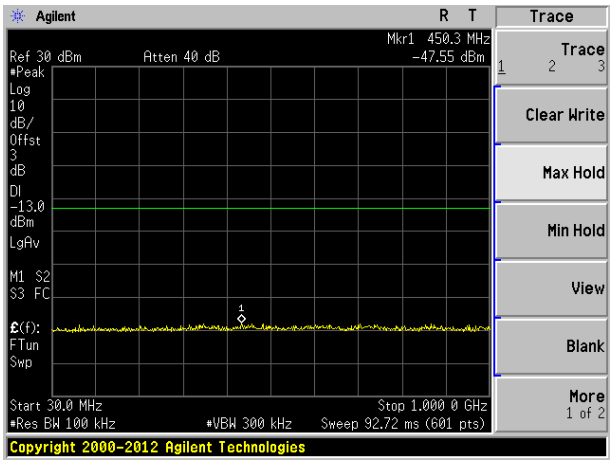

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 10MHz

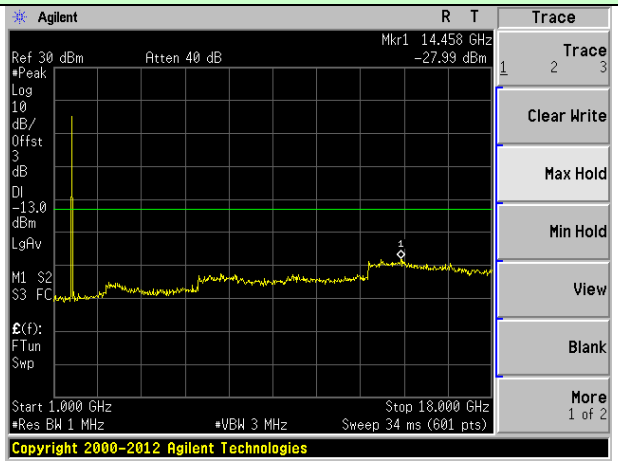

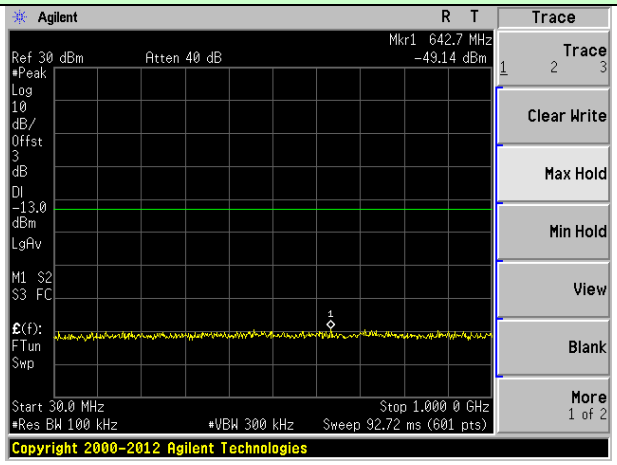

Lowest channel

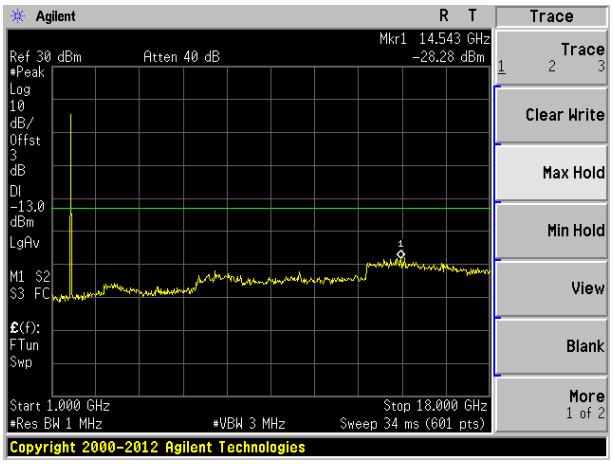

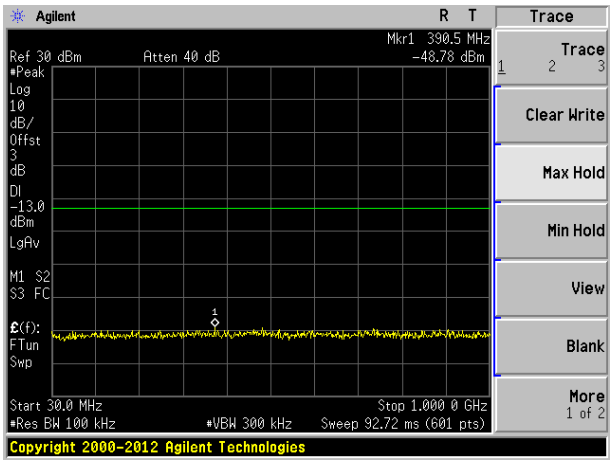

Middle channel

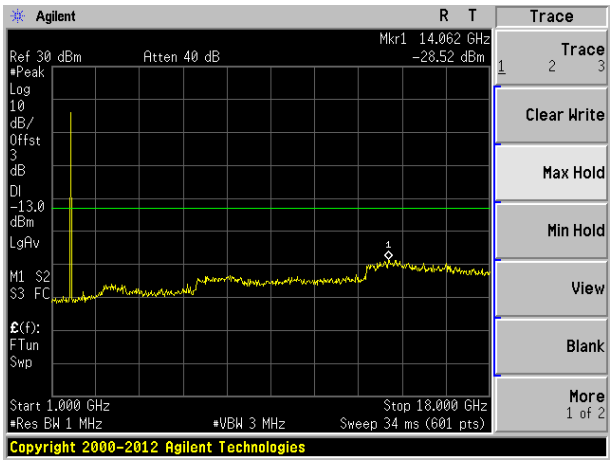

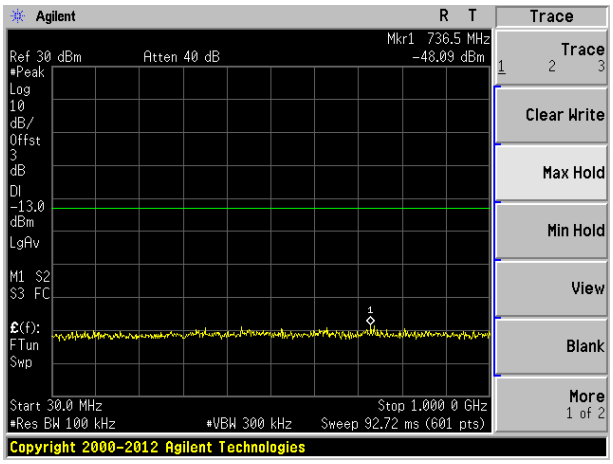

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 15MHz

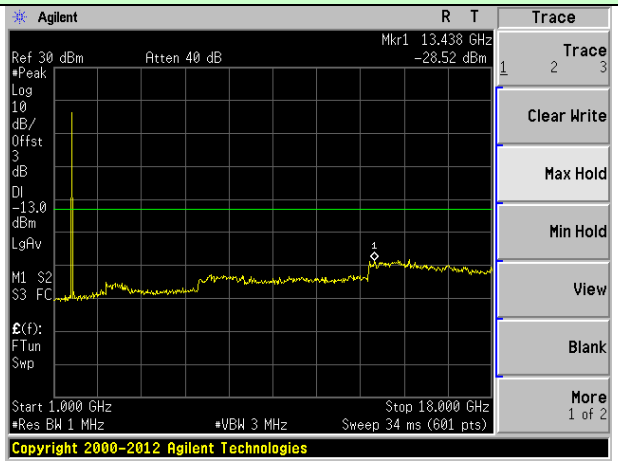

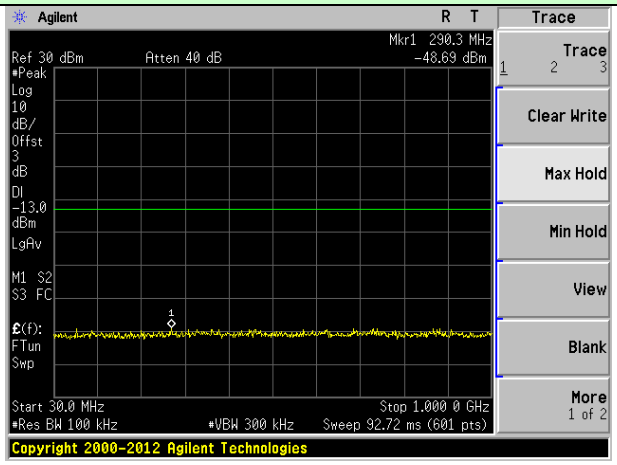

Lowest channel

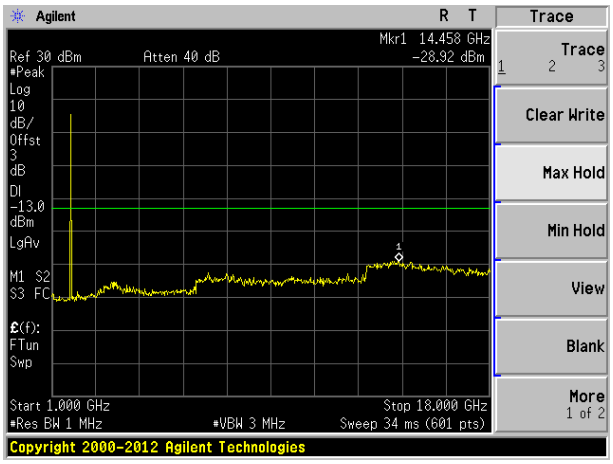

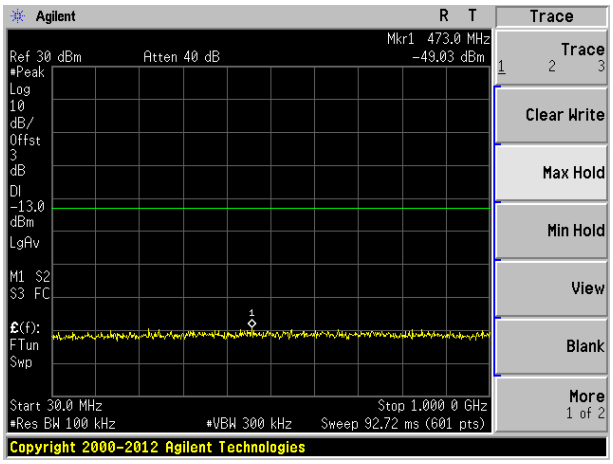

Middle channel

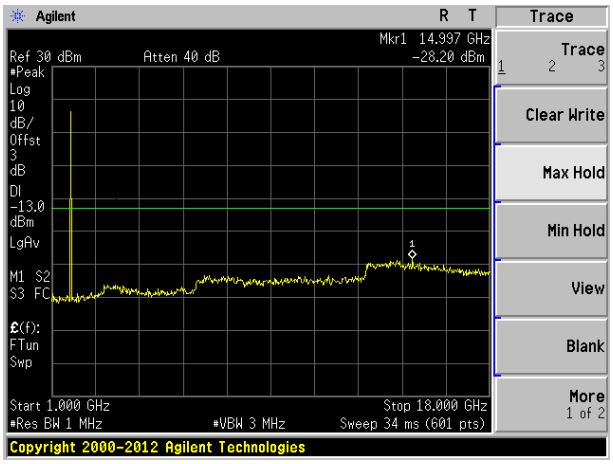

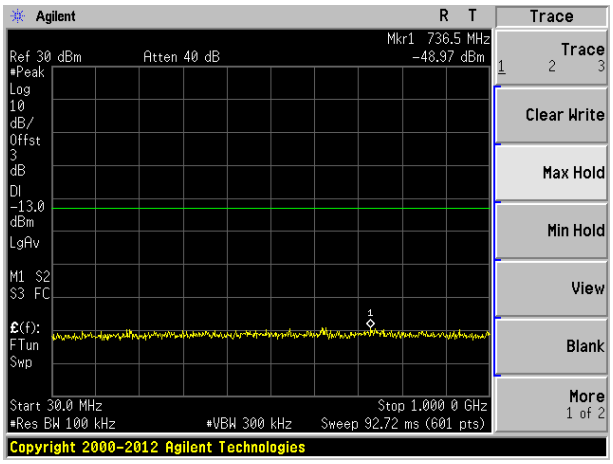

Highest channel

Test Mode: LTE Band 4	Channel Bandwidth: 20MHz

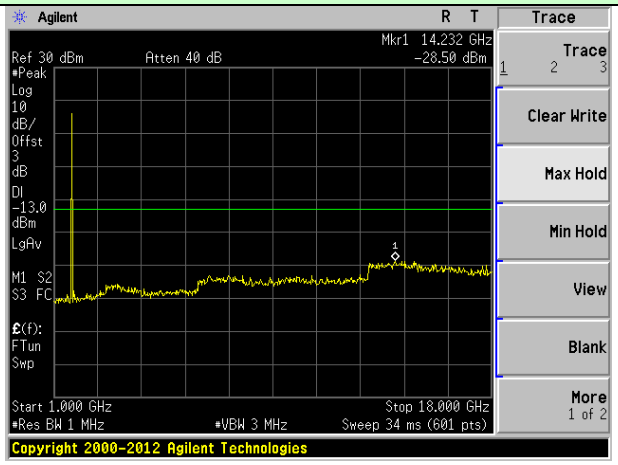

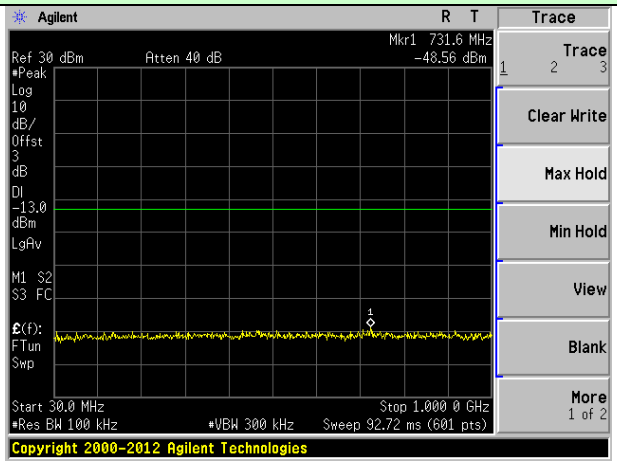

Lowest channel

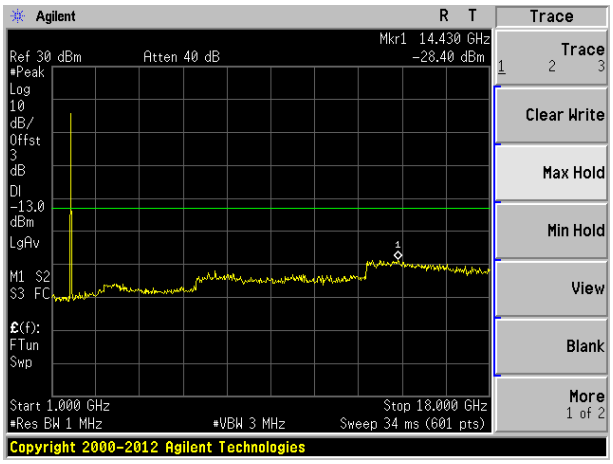

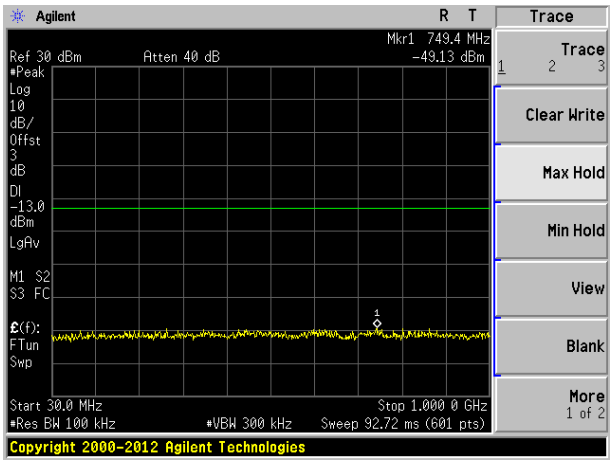

Middle channel

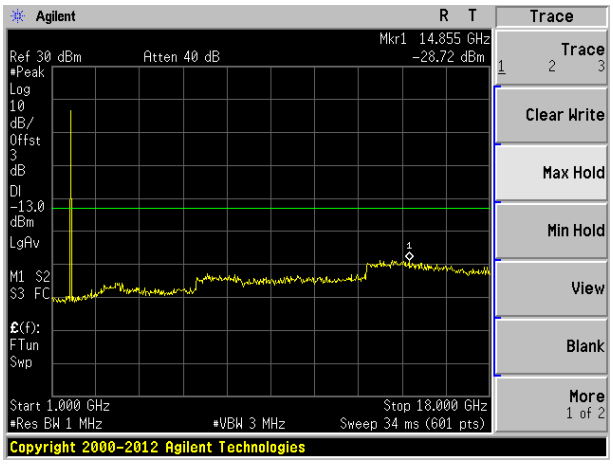

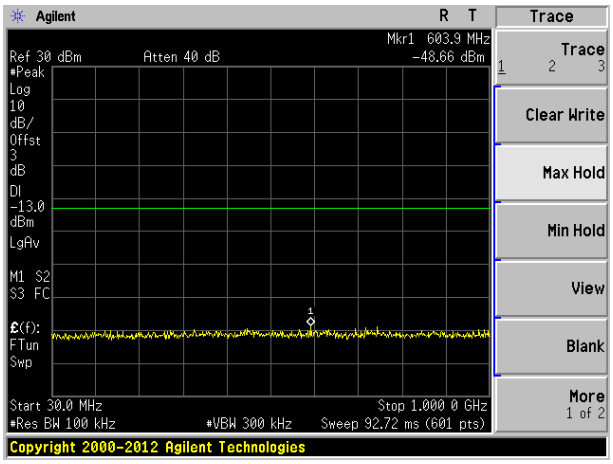

Highest channel

Test Mode: LTE Band 13	Channel Bandwidth: 5MHz

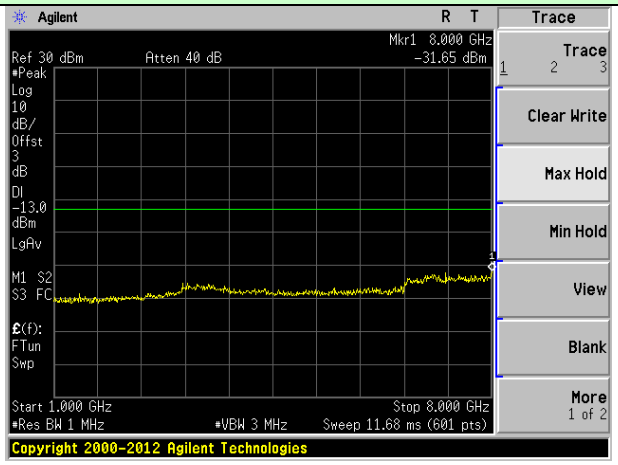

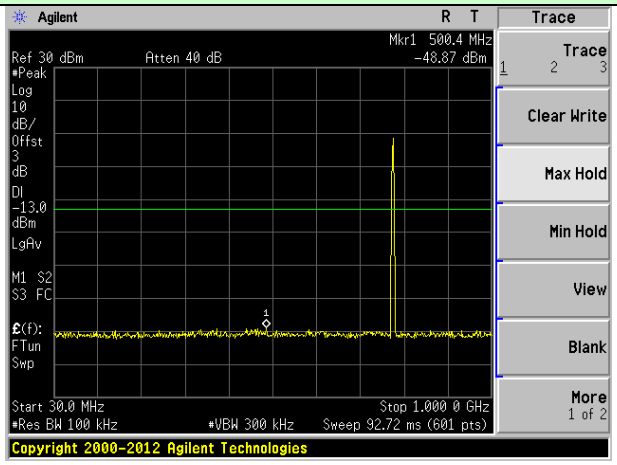

Lowest channel

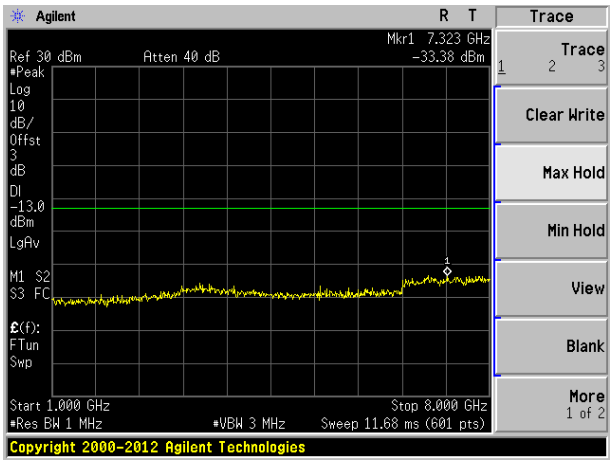

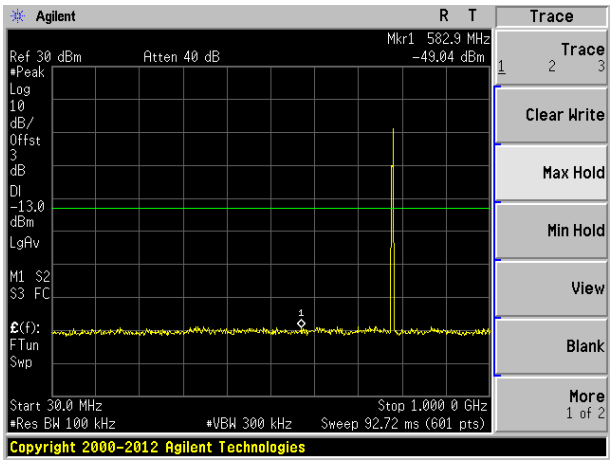

Middle channel

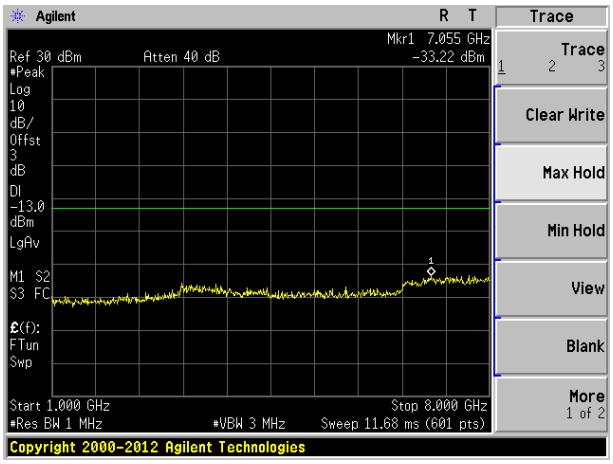

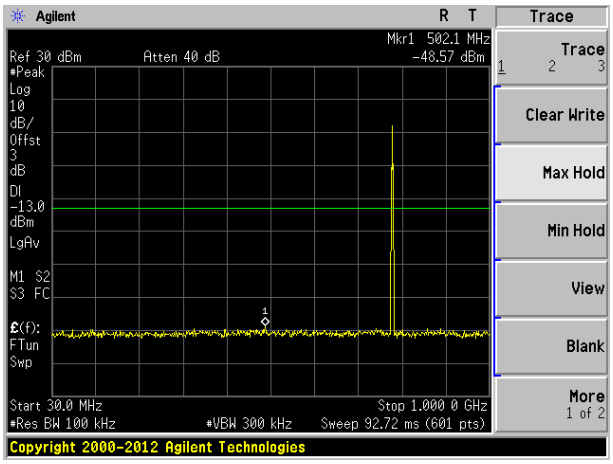

Highest channel

Test Mode: LTE Band 13	Channel Bandwidth: 5MHz

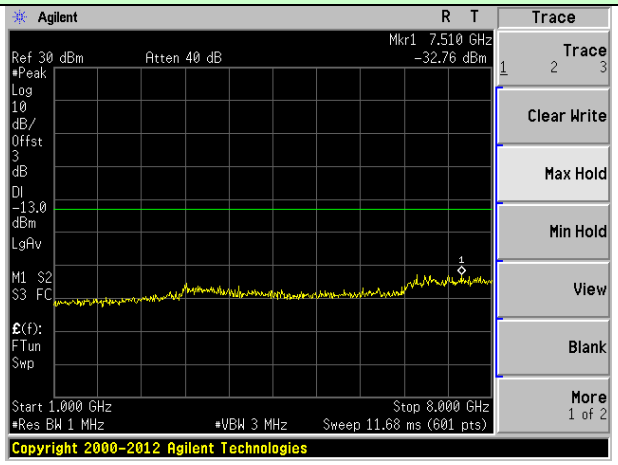

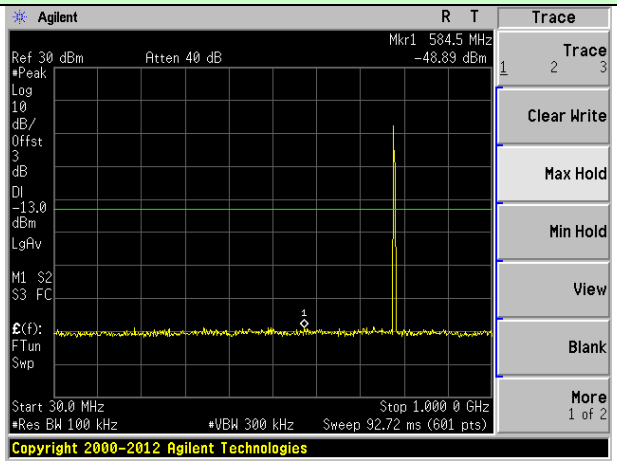

Middle channel

Band Edge:

LTE Band 4(QPSK mode):

1.4MHz Bandwidth (RB size:1# RB offset:0#)	1.4MHz Bandwidth (RB size:1# RB offset:5#)
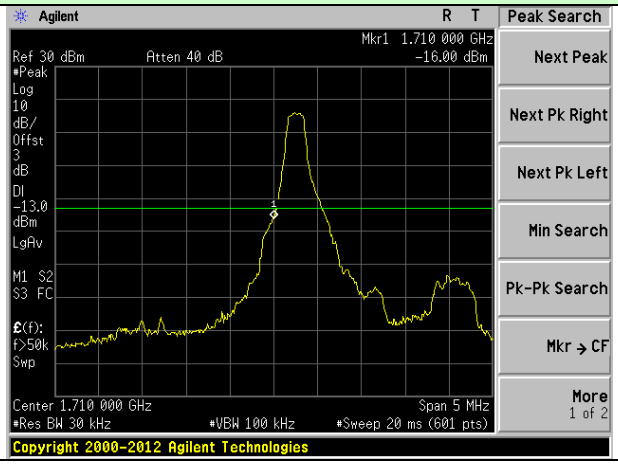	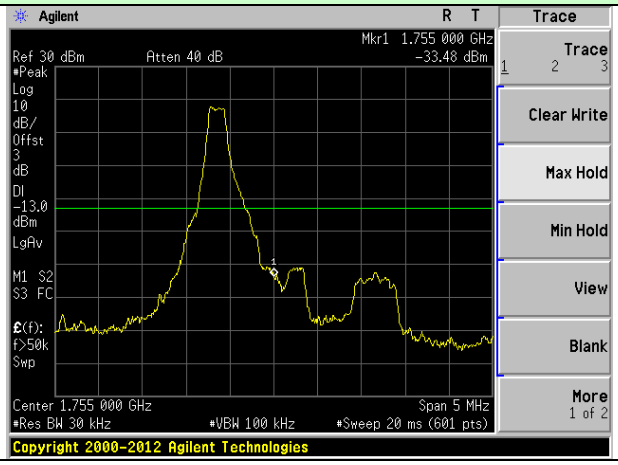
Lowest channel	Highest channel

1.4MHz Bandwidth (RB size:3# RB offset:0#)	1.4MHz Bandwidth (RB size:3# RB offset:2#)
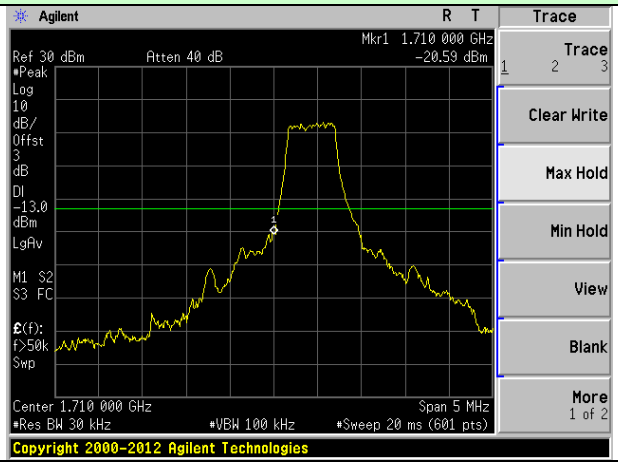	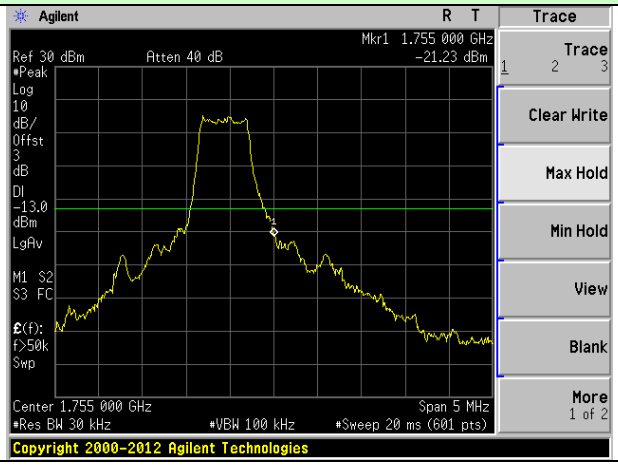
Lowest channel	Highest channel

1.4MHz Bandwidth (RB size:6# RB offset:0#)	1.4MHz Bandwidth (RB size:6# RB offset:0#)
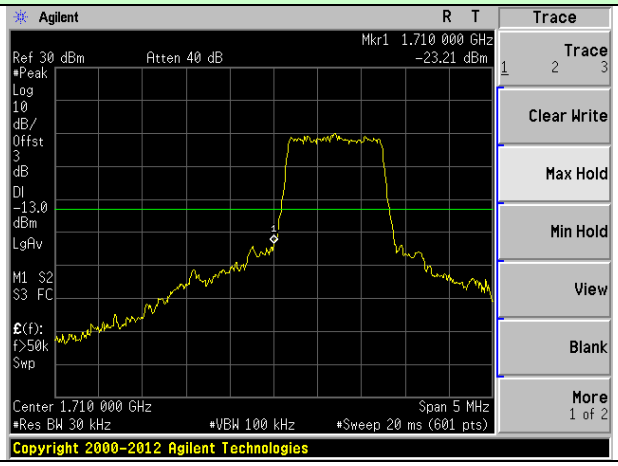	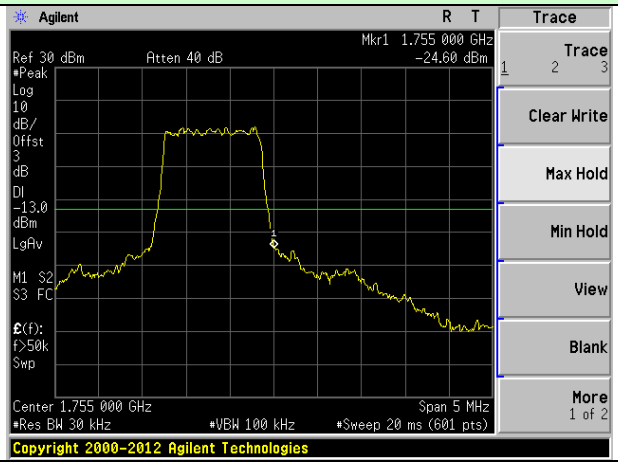
Lowest channel	Highest channel

3MHz Bandwidth (RB size:1# RB offset:0#)	3MHz Bandwidth (RB size:1# RB offset:14#)
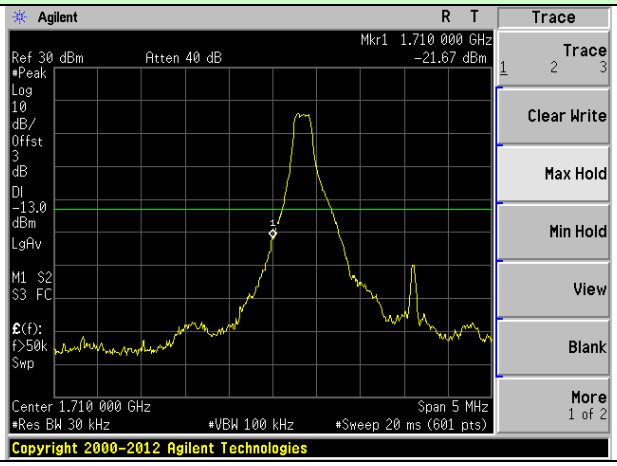	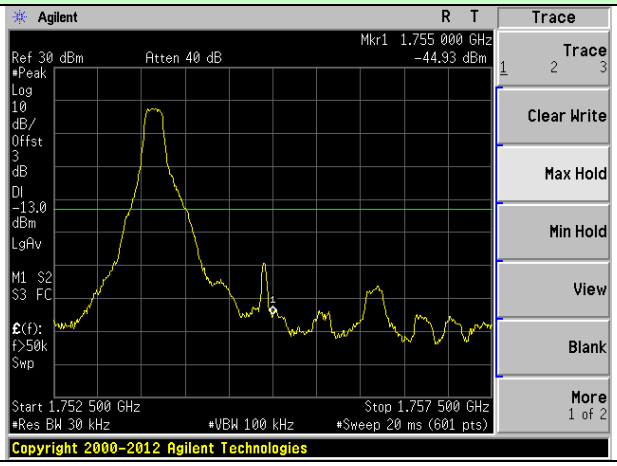
Lowest channel	Highest channel

3MHz Bandwidth (RB size:8# RB offset:0#)	3MHz Bandwidth (RB size:8# RB offset:7#)
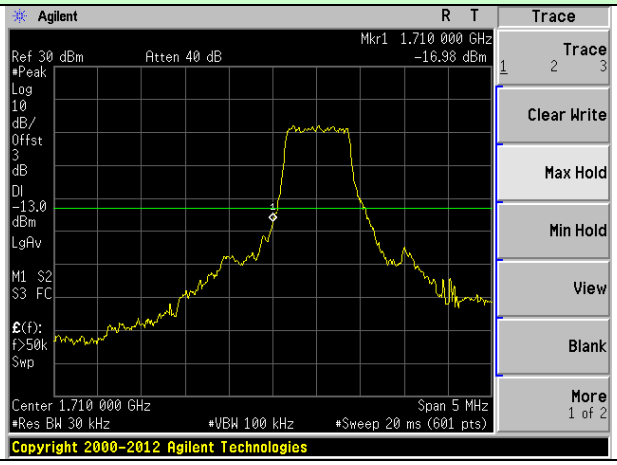	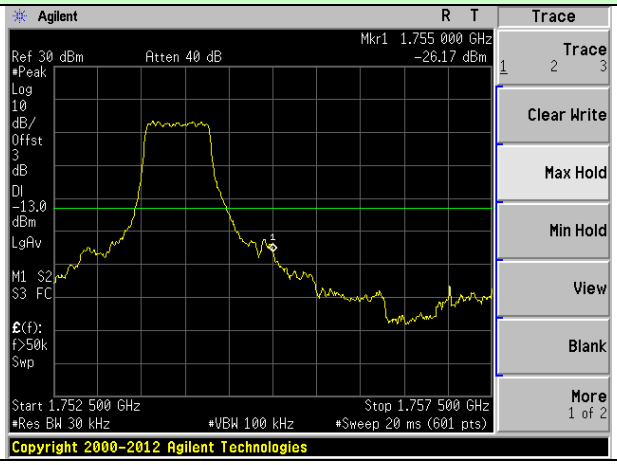
Lowest channel	Highest channel

3MHz Bandwidth (RB size:15# RB offset:0#)	3MHz Bandwidth (RB size:15# RB offset:0#)
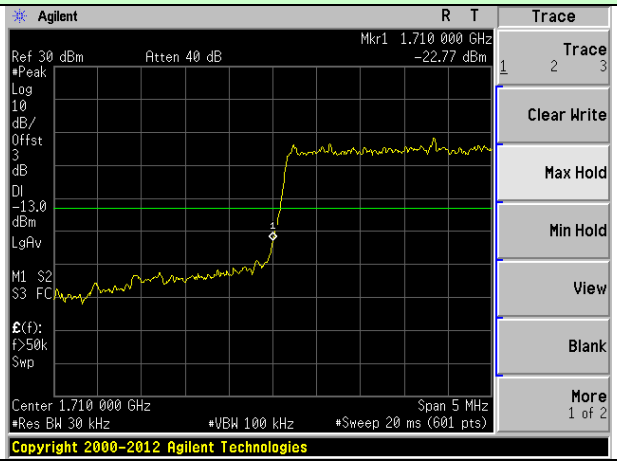	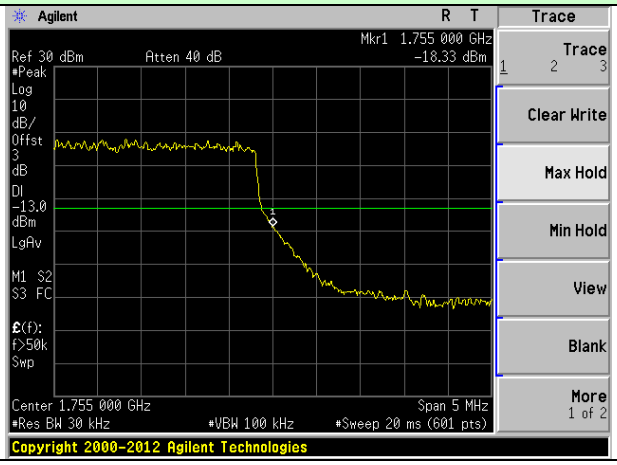
Lowest channel	Highest channel

5MHz Bandwidth (RB size:1# RB offset:0#)	5MHz Bandwidth (RB size:1# RB offset:24#)
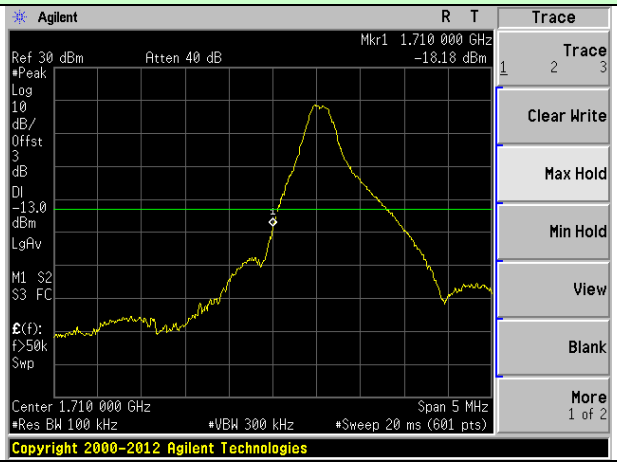	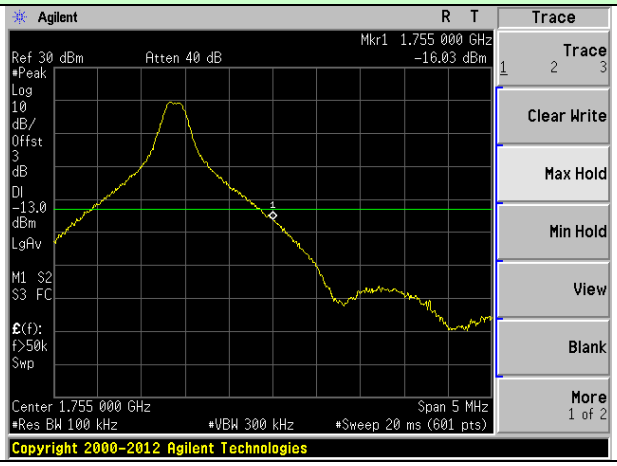
Lowest channel	Highest channel

5MHz Bandwidth (RB size:12# RB offset:0#)	5MHz Bandwidth (RB size:12# RB offset:13#)
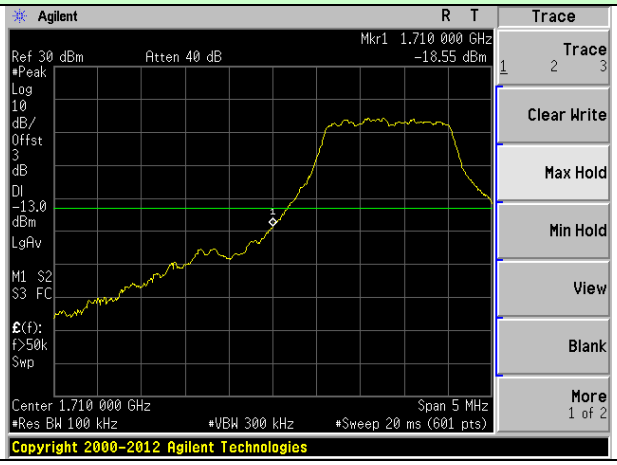	
Lowest channel	Highest channel

5MHz Bandwidth (RB size:25# RB offset:0#)	5MHz Bandwidth (RB size:25# RB offset:0#)
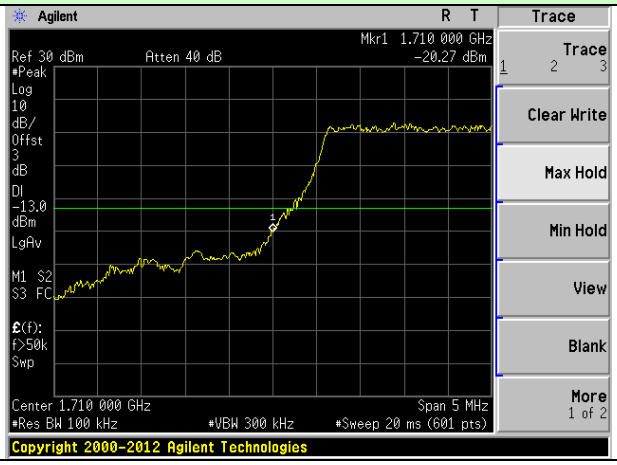	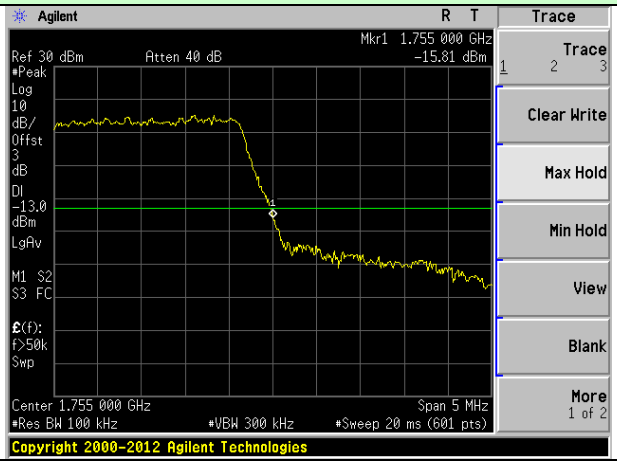
Lowest channel	Highest channel

10MHz Bandwidth (RB size:1# RB offset:0#)	10MHz Bandwidth (RB size:1# RB offset:49#)
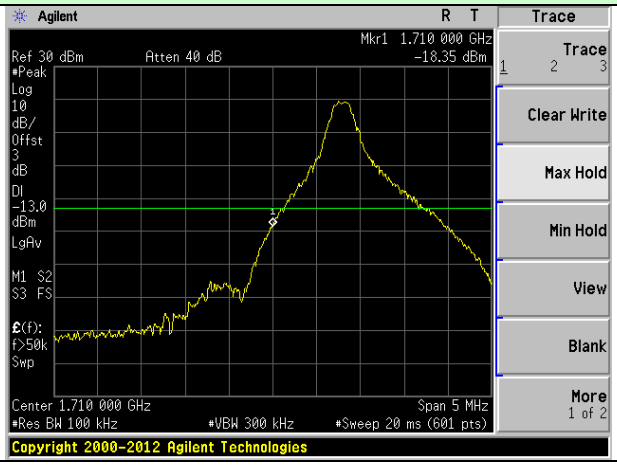	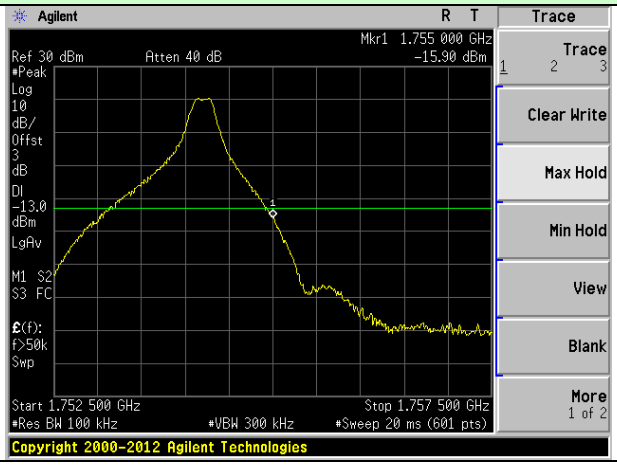
Lowest channel	Highest channel

10MHz Bandwidth (RB size:25# RB offset:0#)	10MHz Bandwidth (RB size:25# RB offset:25#)
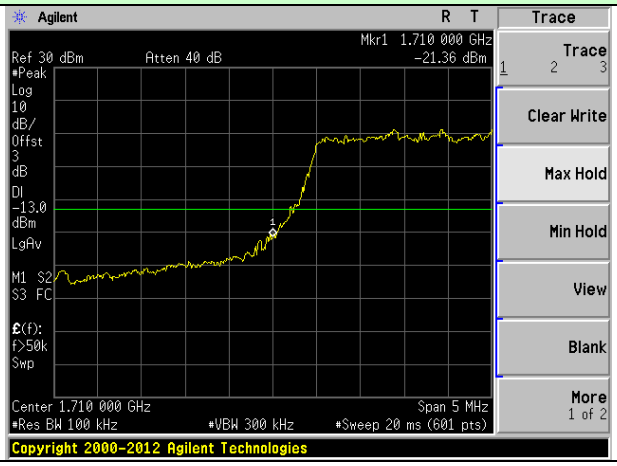	
Lowest channel	Highest channel

10MHz Bandwidth (RB size:50# RB offset:0#)	10MHz Bandwidth (RB size:50# RB offset:0#)
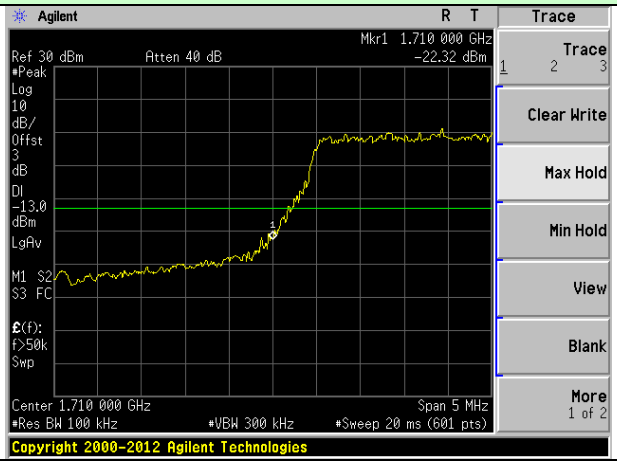	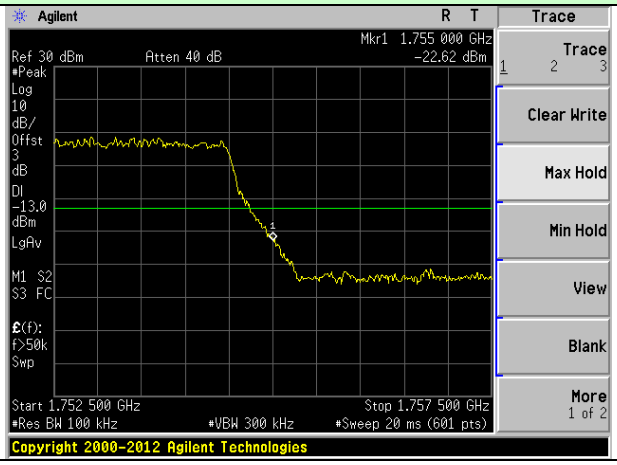
Lowest channel	Highest channel

15MHz Bandwidth (RB size:1# RB offset:0#)	15MHz Bandwidth (RB size:1# RB offset:74#)

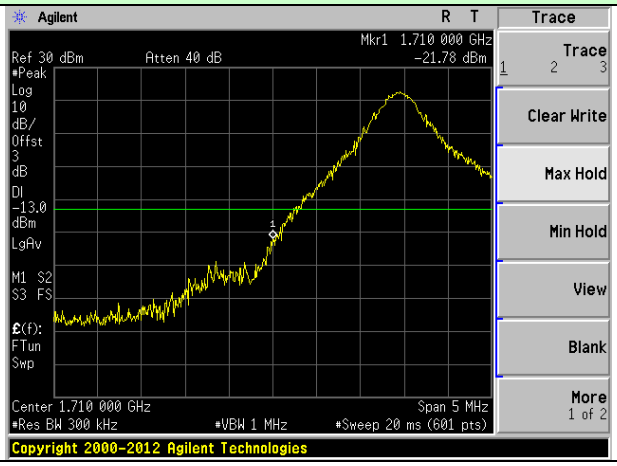

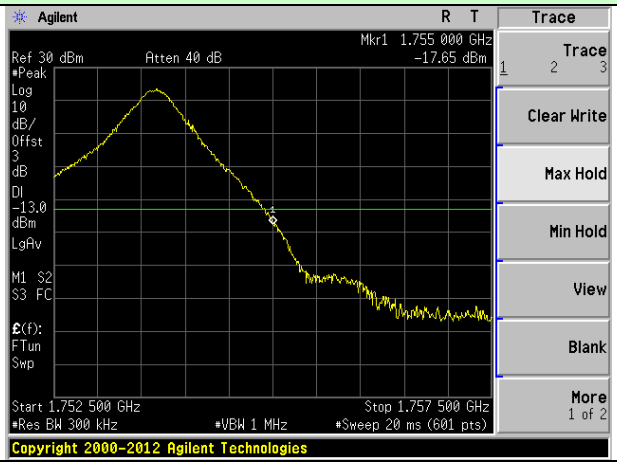

Lowest channel | Highest channel

15MHz Bandwidth (RB size:36# RB offset:0#)	15MHz Bandwidth (RB size:36# RB offset:39#)

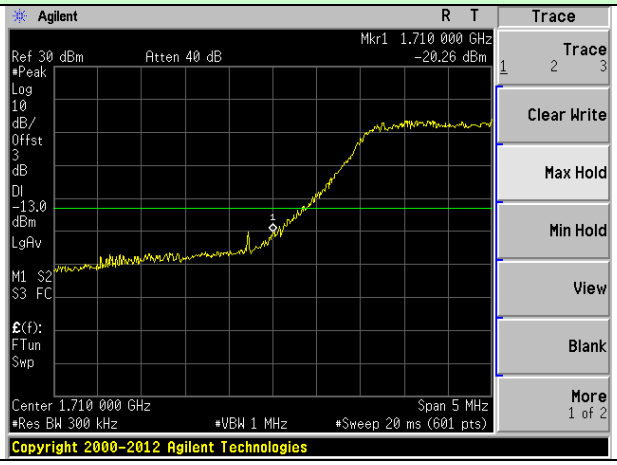

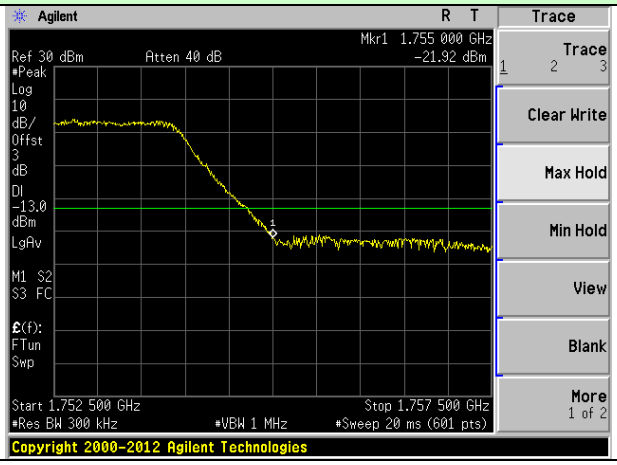

Lowest channel | Highest channel

15MHz Bandwidth (RB size:75# RB offset:0#)	15MHz Bandwidth (RB size:75# RB offset:0#)

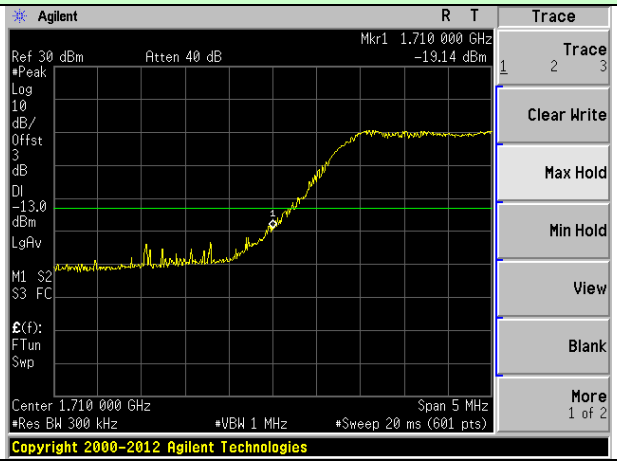

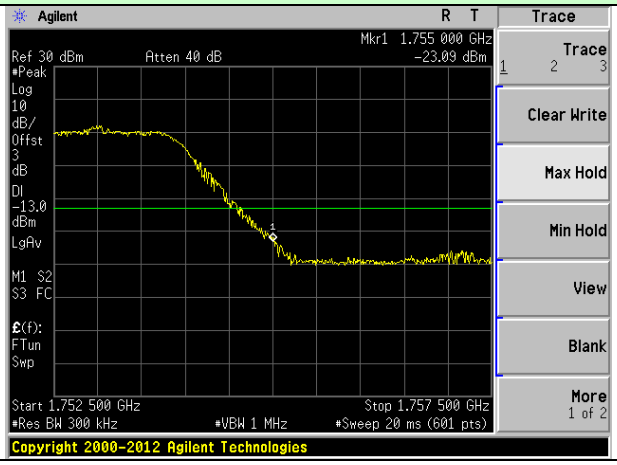

Lowest channel | Highest channel

20MHz Bandwidth (RB size:1# RB offset:0#)	20MHz Bandwidth (RB size:1# RB offset:99#)
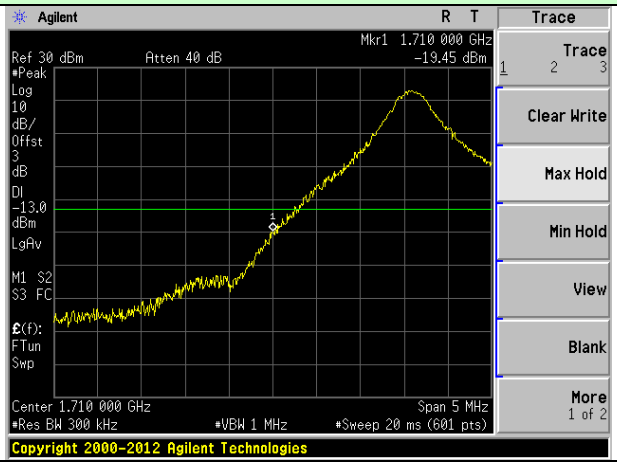	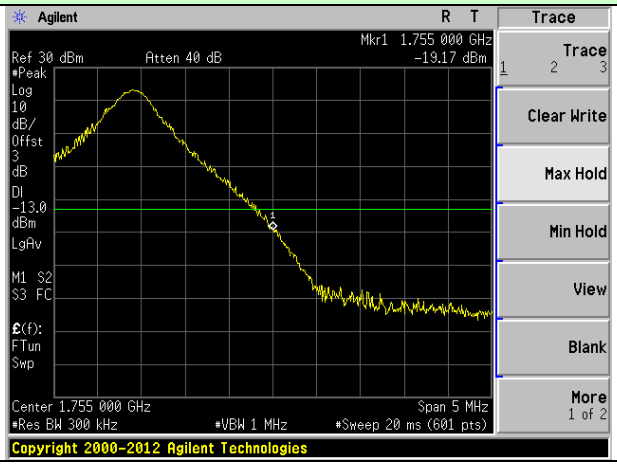
Lowest channel	Highest channel

20MHz Bandwidth (RB size:50# RB offset:0#)	20MHz Bandwidth (RB size:50# RB offset:50#)
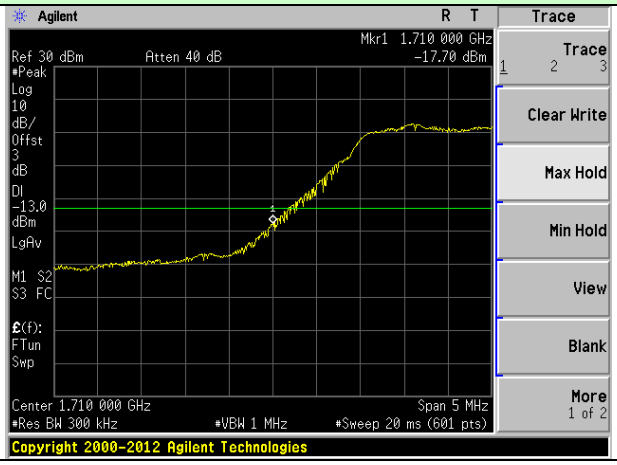	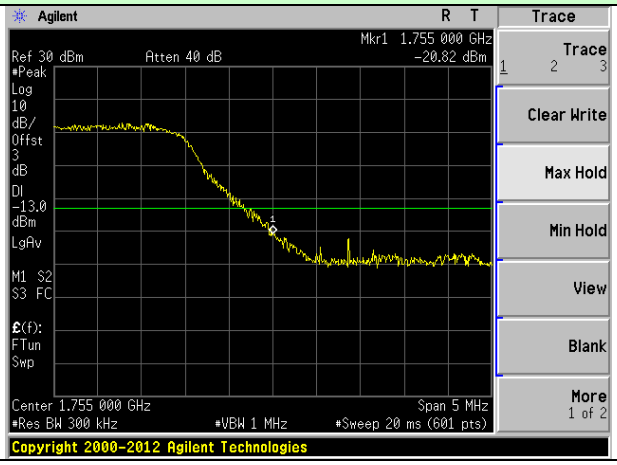
Lowest channel	Highest channel

20MHz Bandwidth (RB size:100# RB offset:0#)	20MHz Bandwidth (RB size:100# RB offset:0#)
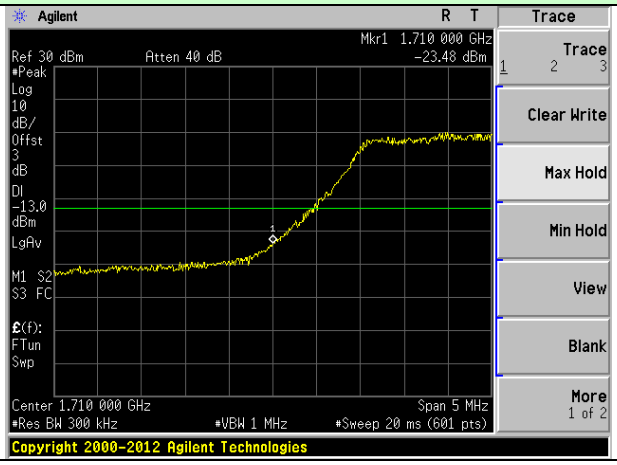	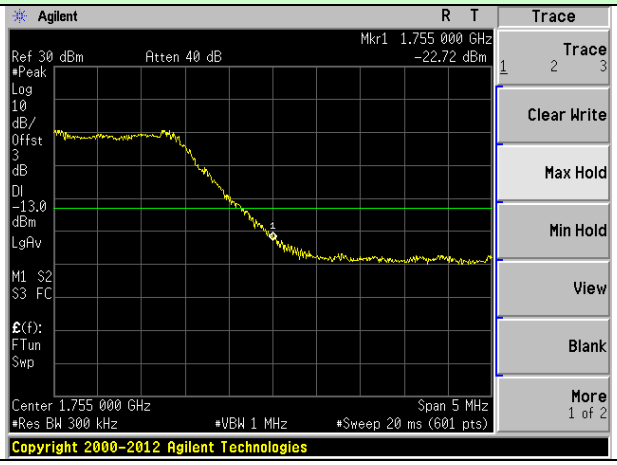
Lowest channel	Highest channel

LTE Band 13(QPSK mode):

5MHz Bandwidth (RB size:1# RB offset:0#)	5MHz Bandwidth (RB size:1# RB offset:24#)
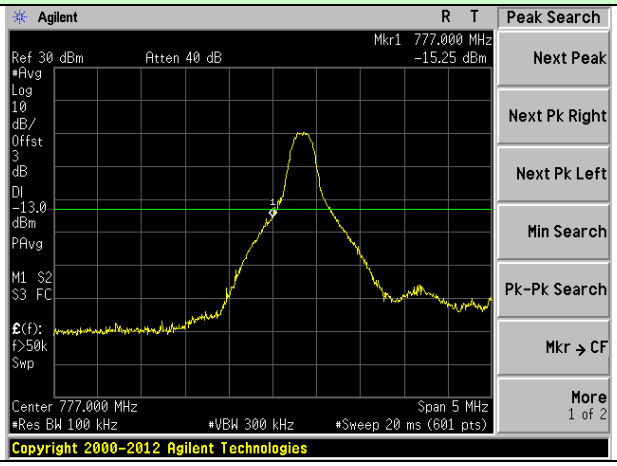	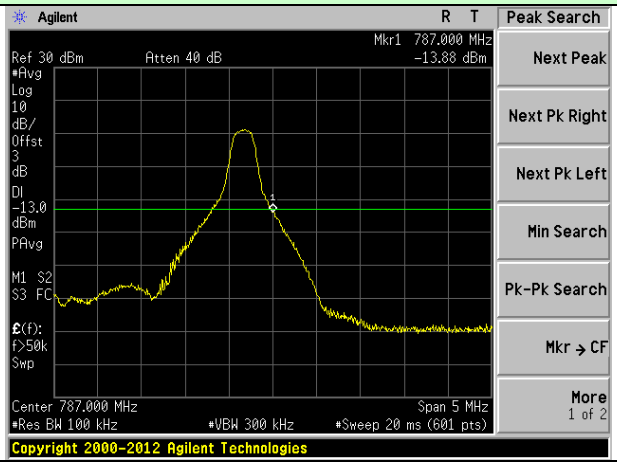
Lowest channel	Highest channel

5MHz Bandwidth (RB size:12# RB offset:0#)	5MHz Bandwidth (RB size:12# RB offset:13#)
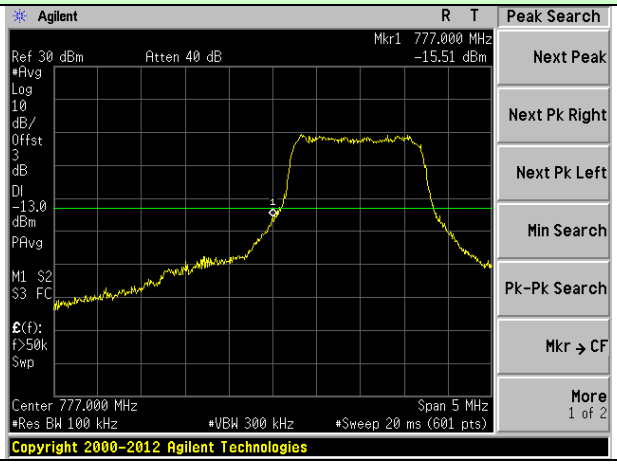	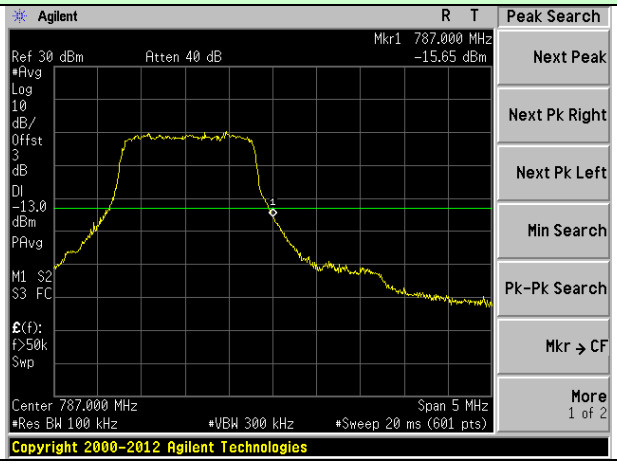
Lowest channel	Highest channel

5MHz Bandwidth (RB size:25# RB offset:0#)	5MHz Bandwidth (RB size:25# RB offset:0#)
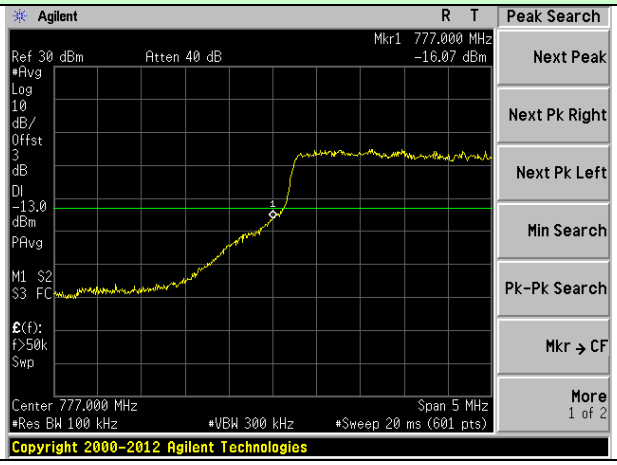	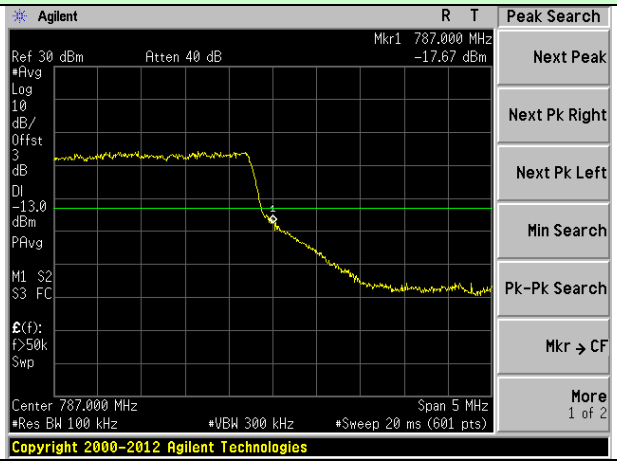
Lowest channel	Highest channel

10MHz Bandwidth (RB size:1# RB offset:0#)	10MHz Bandwidth (RB size:1# RB offset:49#)
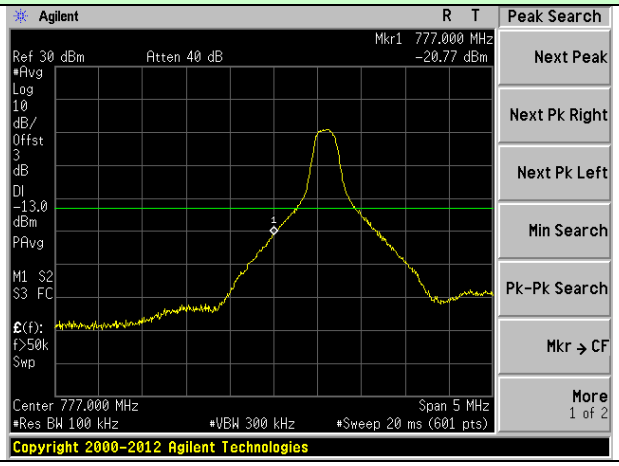	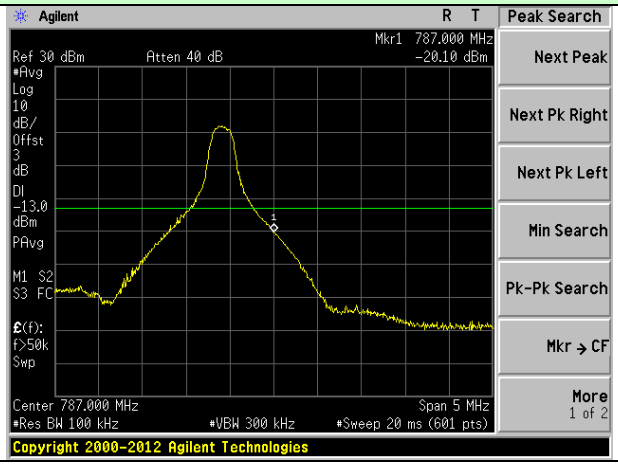
Lowest channel	Highest channel

10MHz Bandwidth (RB size:25# RB offset:0#)	10MHz Bandwidth (RB size:25# RB offset:25#)
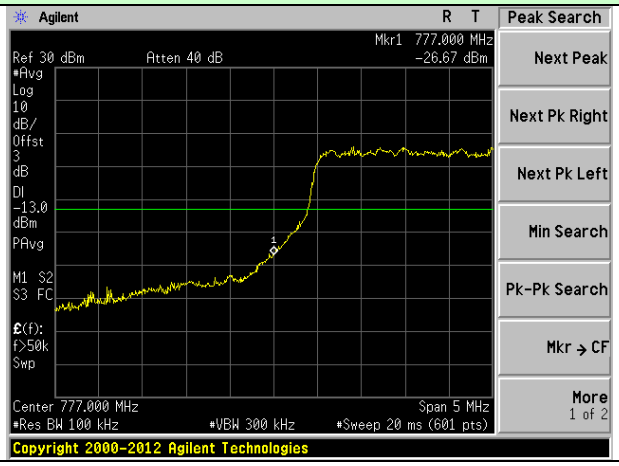	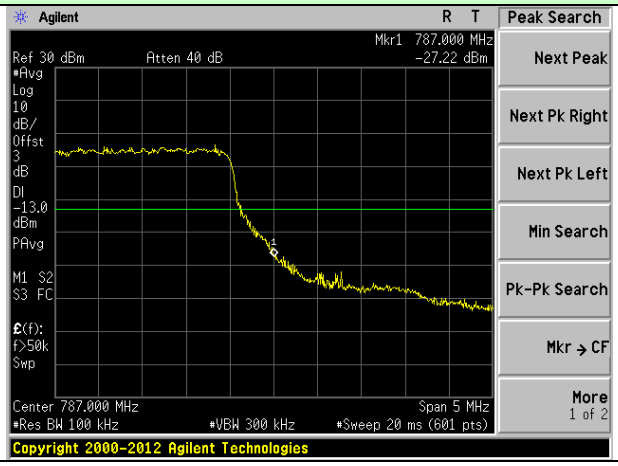
Lowest channel	Highest channel

10MHz Bandwidth (RB size:50# RB offset:0#)	10MHz Bandwidth (RB size:50# RB offset:0#)
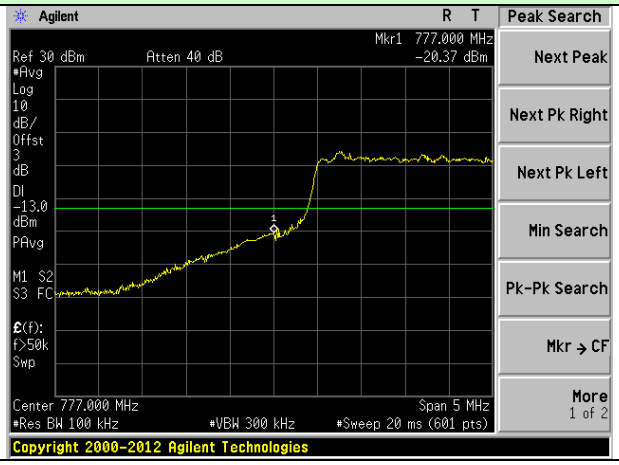	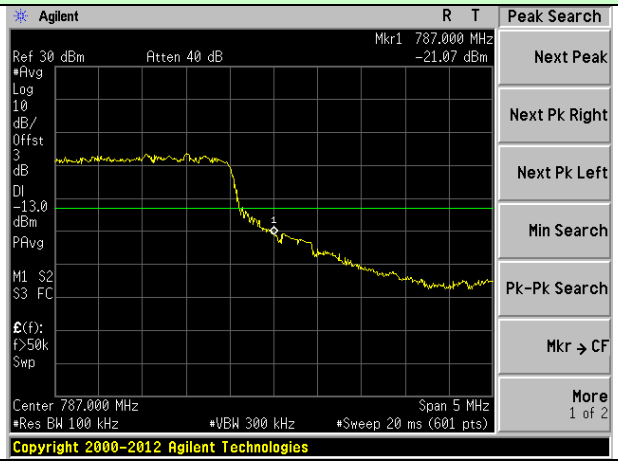
Lowest channel	Highest channel

LTE Band 4(16QAM mode):

1.4MHz Bandwidth (RB size:1# RB offset:0#)	1.4MHz Bandwidth (RB size:1# RB offset:5#)
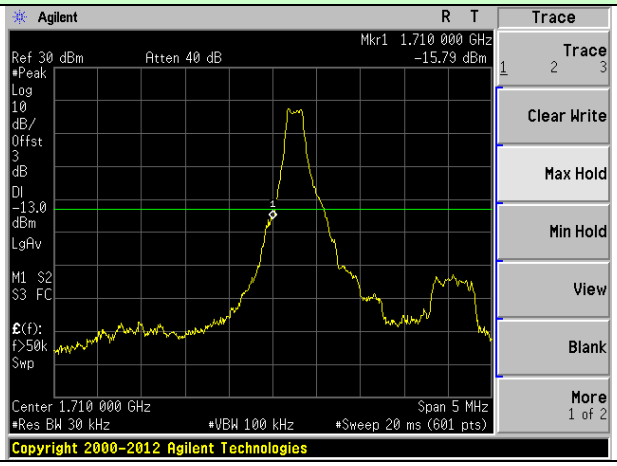	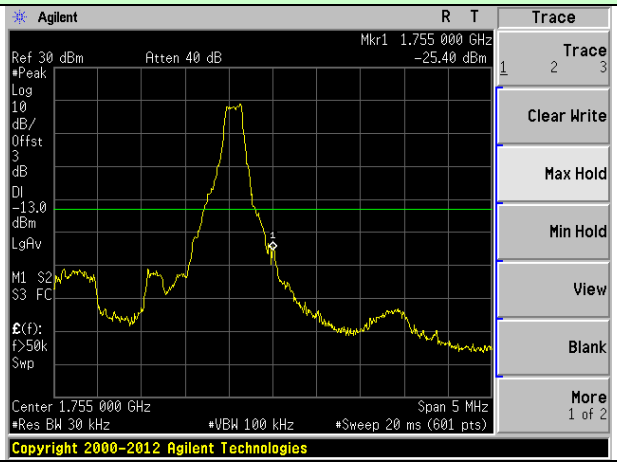
Lowest channel	Highest channel

1.4MHz Bandwidth (RB size:3# RB offset:0#)	1.4MHz Bandwidth (RB size:3# RB offset:2#)
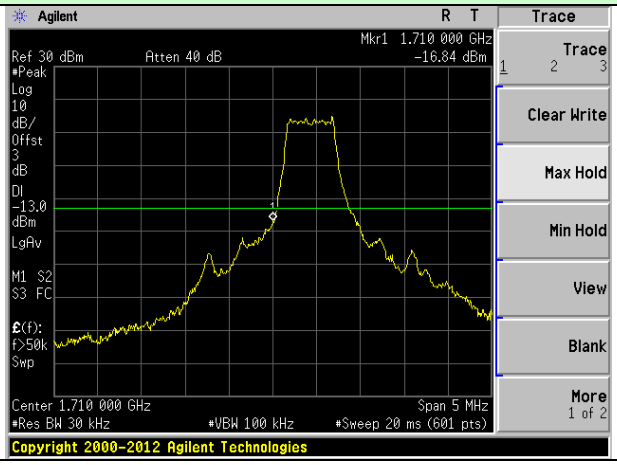	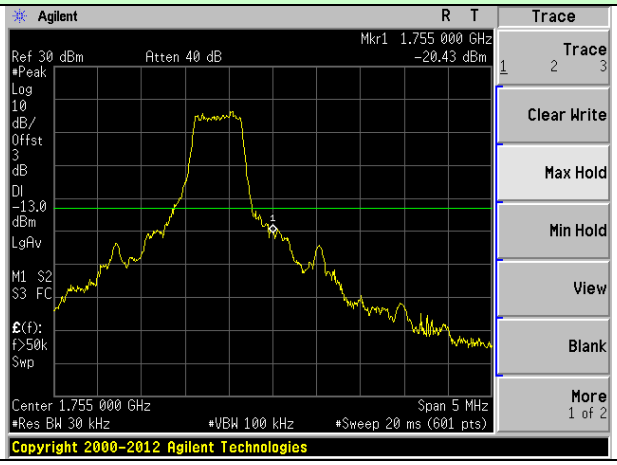
Lowest channel	Highest channel

1.4MHz Bandwidth (RB size:6# RB offset:0#)	1.4MHz Bandwidth (RB size:6# RB offset:0#)
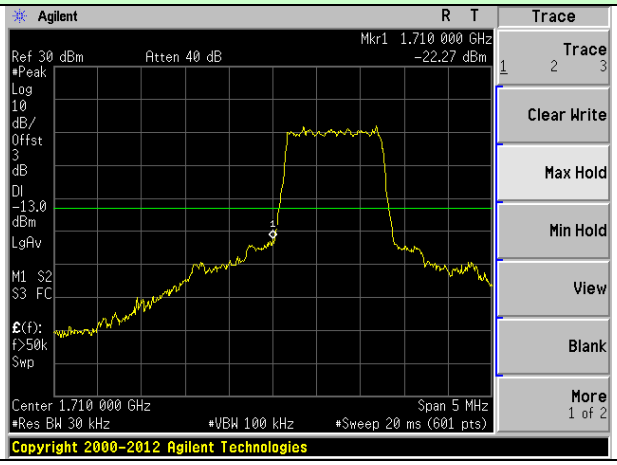	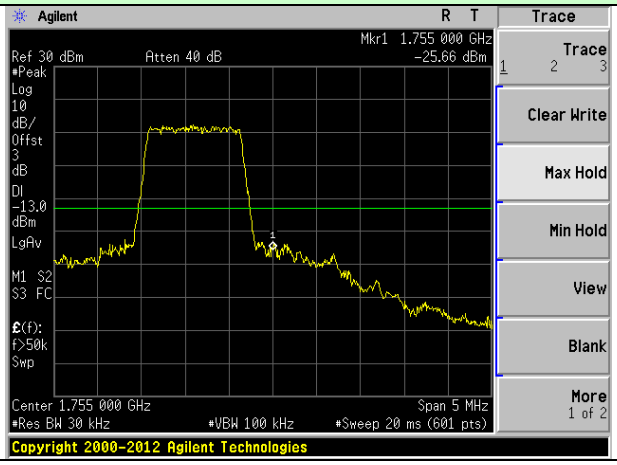
Lowest channel	Highest channel

3MHz Bandwidth (RB size:1# RB offset:0#)	3MHz Bandwidth (RB size:1# RB offset:14#)
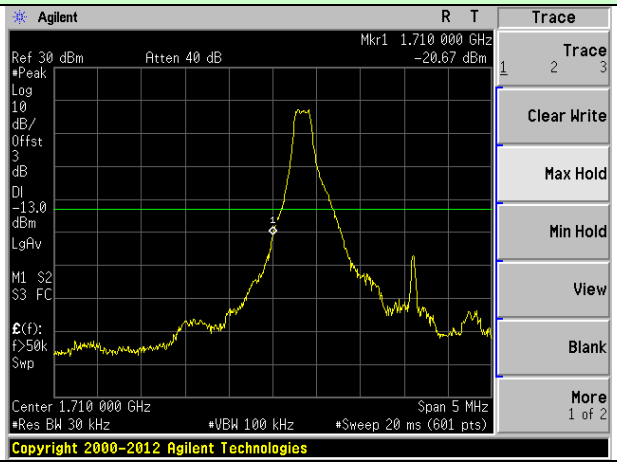	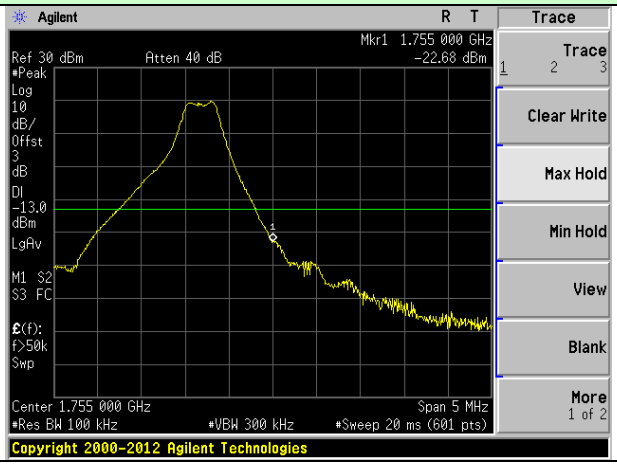
Lowest channel	Highest channel

3MHz Bandwidth (RB size:8# RB offset:0#)	3MHz Bandwidth (RB size:8# RB offset:7#)
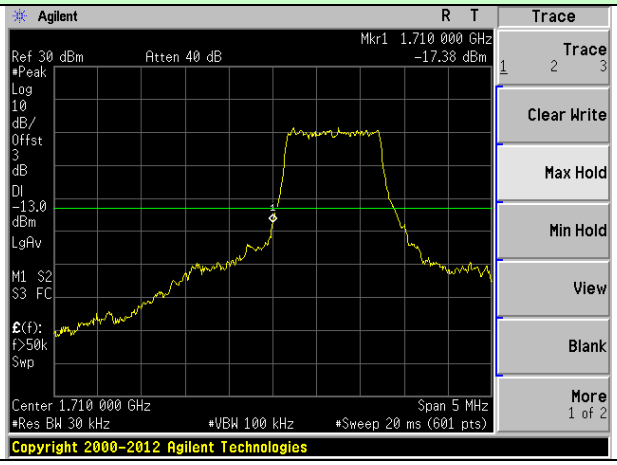	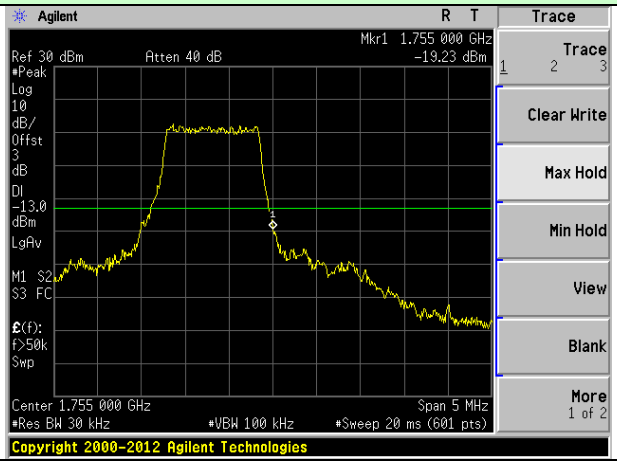
Lowest channel	Highest channel

3MHz Bandwidth (RB size:15# RB offset:0#)	3MHz Bandwidth (RB size:15# RB offset:0#)
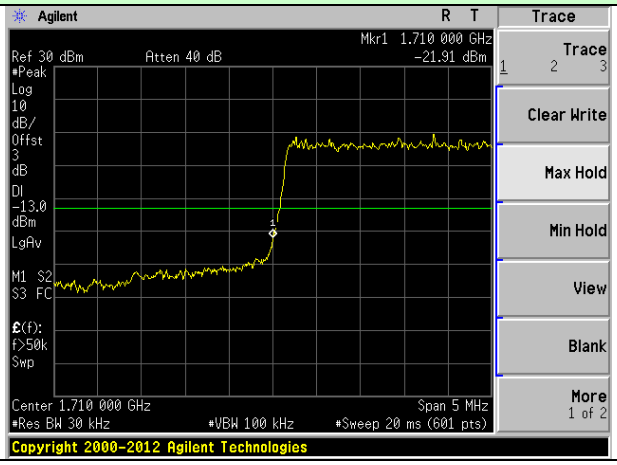	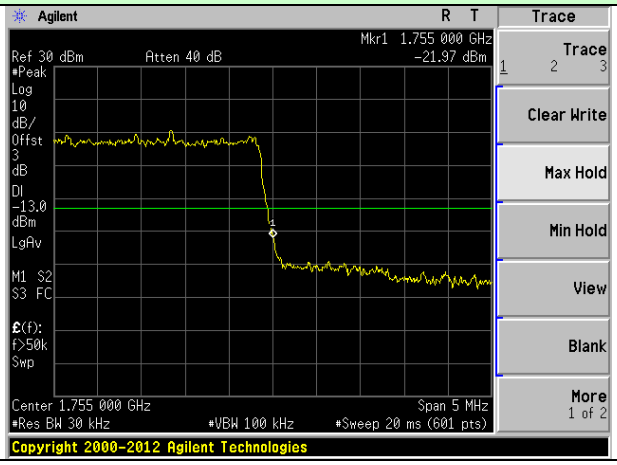
Lowest channel	Highest channel

5MHz Bandwidth (RB size:1# RB offset:0#)	5MHz Bandwidth (RB size:1# RB offset:24#)
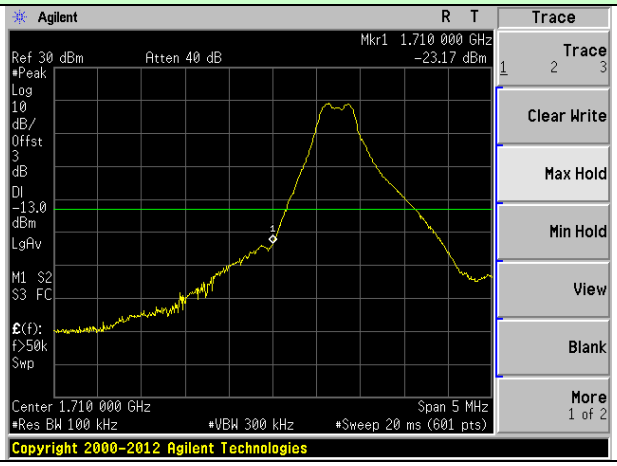	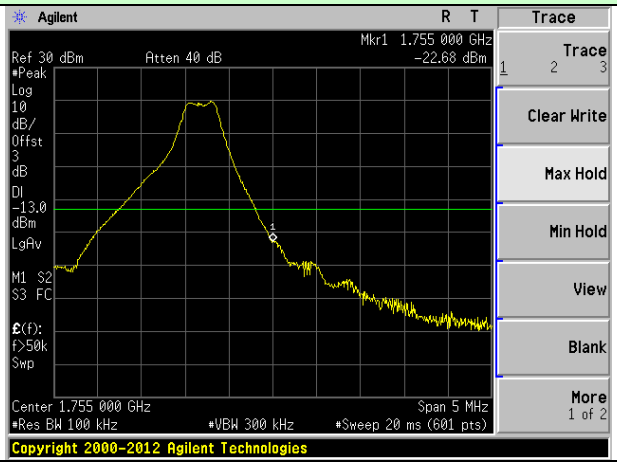
Lowest channel	Highest channel

5MHz Bandwidth (RB size:12# RB offset:0#)	5MHz Bandwidth (RB size:12# RB offset:13#)
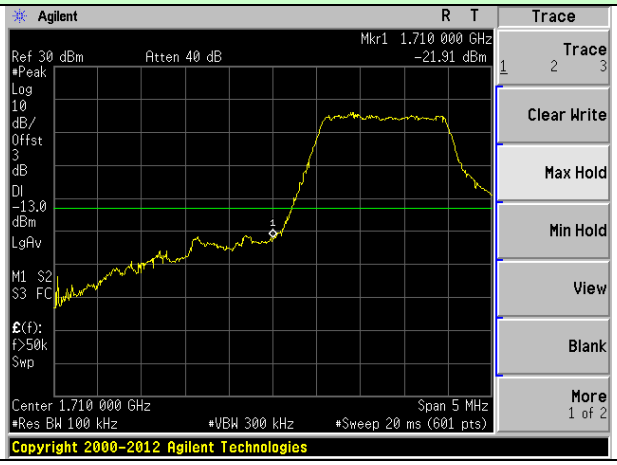	
Lowest channel	Highest channel

5MHz Bandwidth (RB size:25# RB offset:0#)	5MHz Bandwidth (RB size:25# RB offset:0#)
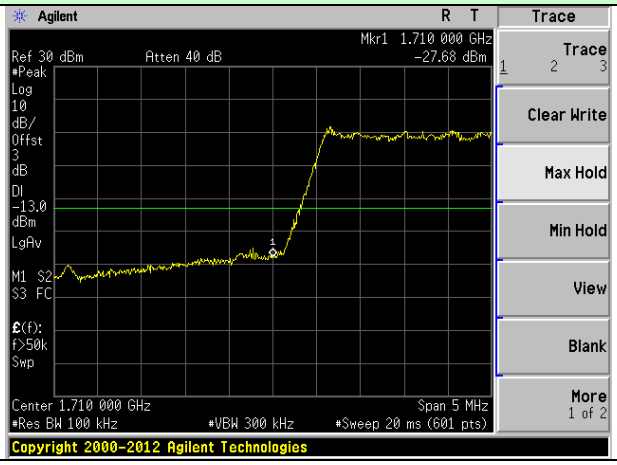	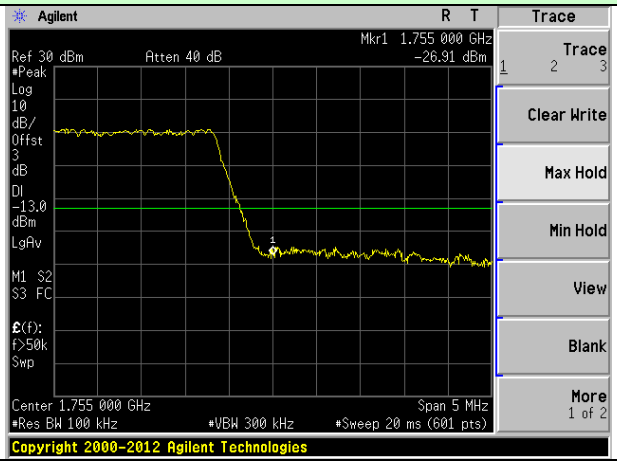
Lowest channel	Highest channel

10MHz Bandwidth (RB size:1# RB offset:0#)	10MHz Bandwidth (RB size:1# RB offset:24#)
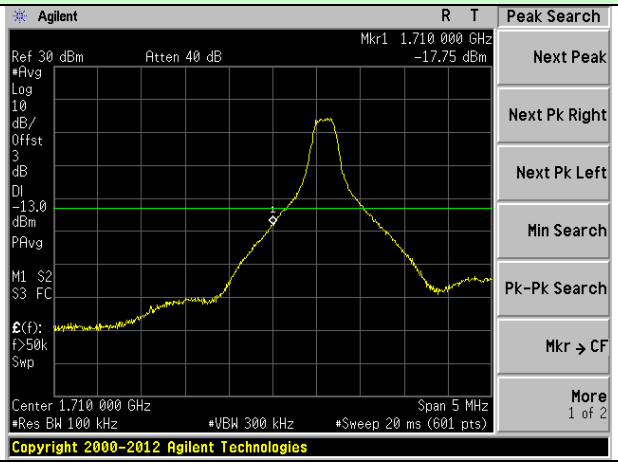	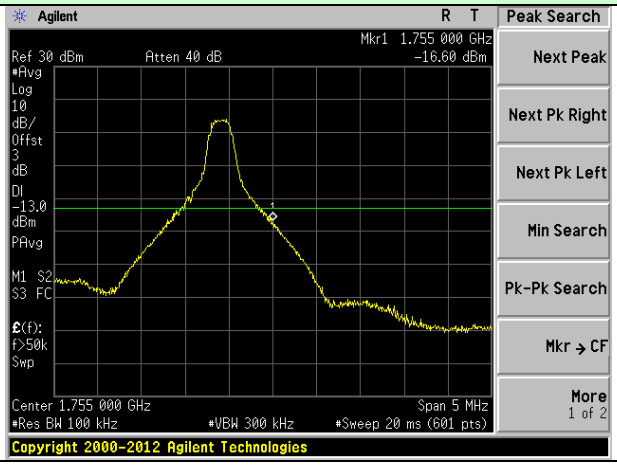
Lowest channel	Highest channel

10MHz Bandwidth (RB size:12# RB offset:0#)	10MHz Bandwidth (RB size:12# RB offset:13#)
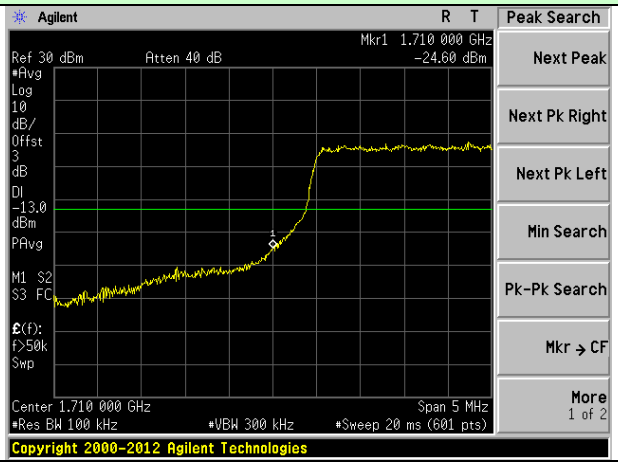	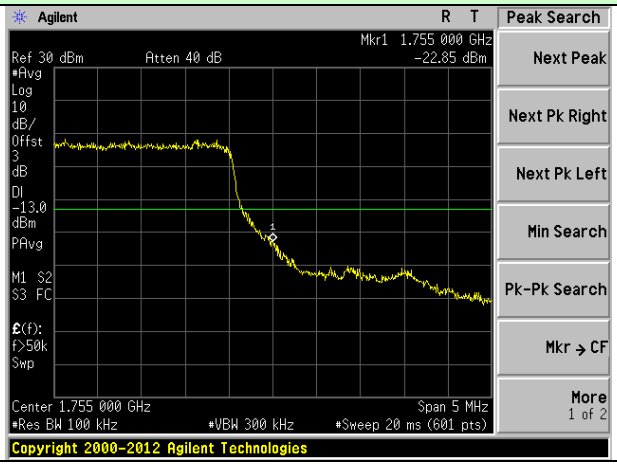
Lowest channel	Highest channel

10MHz Bandwidth (RB size:25# RB offset:0#)	10MHz Bandwidth (RB size:25# RB offset:0#)
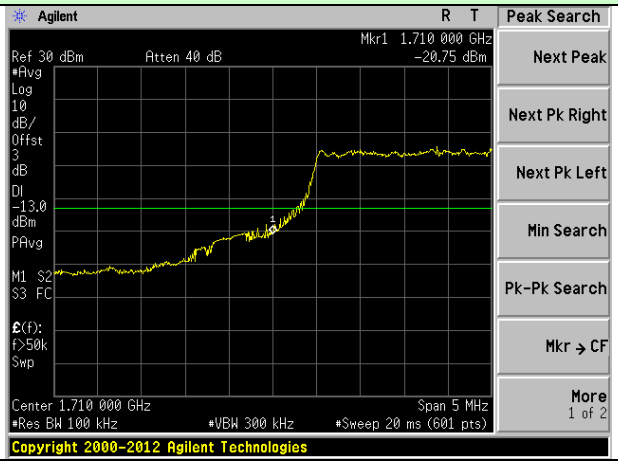	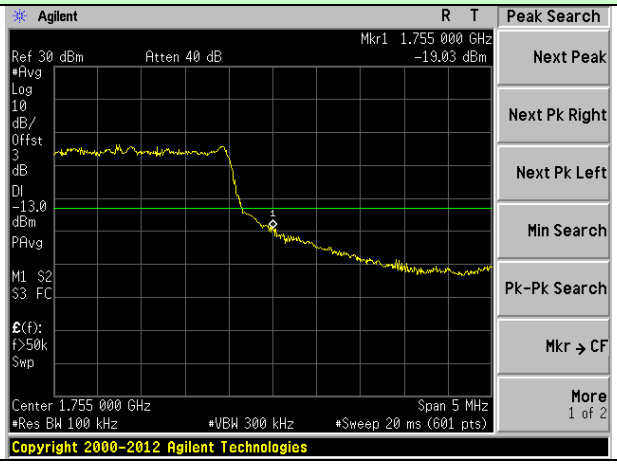
Lowest channel	Highest channel

15MHz Bandwidth (RB size:1# RB offset:0#)	15MHz Bandwidth (RB size:1# RB offset:24#)
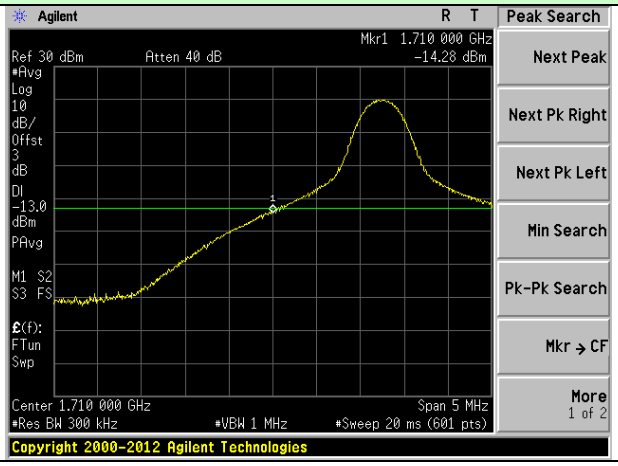	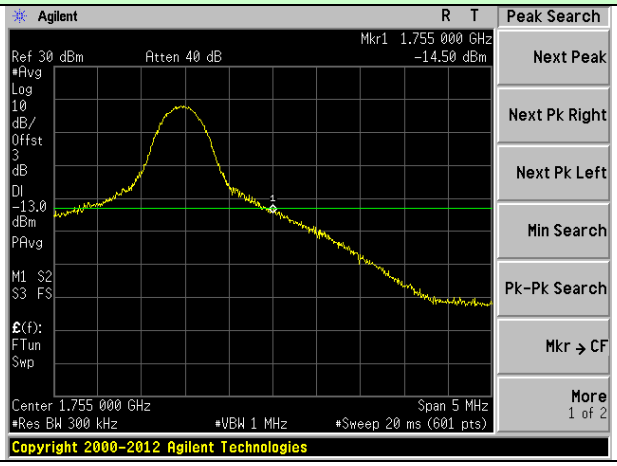
Lowest channel	Highest channel

15MHz Bandwidth (RB size:12# RB offset:0#)	15MHz Bandwidth (RB size:12# RB offset:13#)
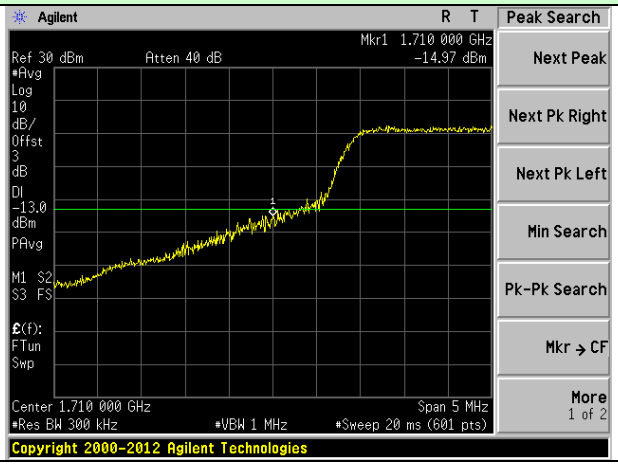	
Lowest channel	Highest channel

15MHz Bandwidth (RB size:25# RB offset:0#)	15MHz Bandwidth (RB size:25# RB offset:0#)
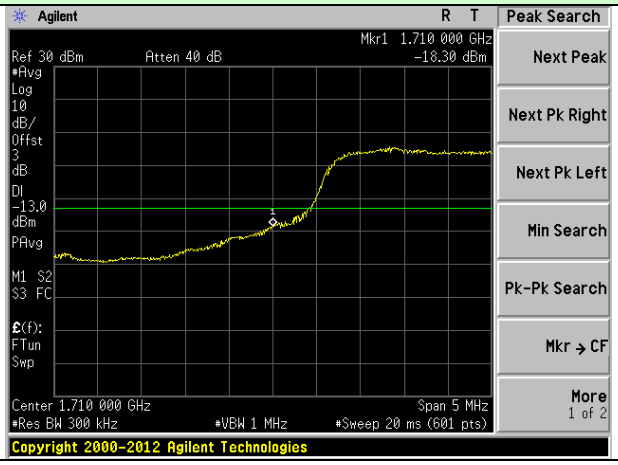	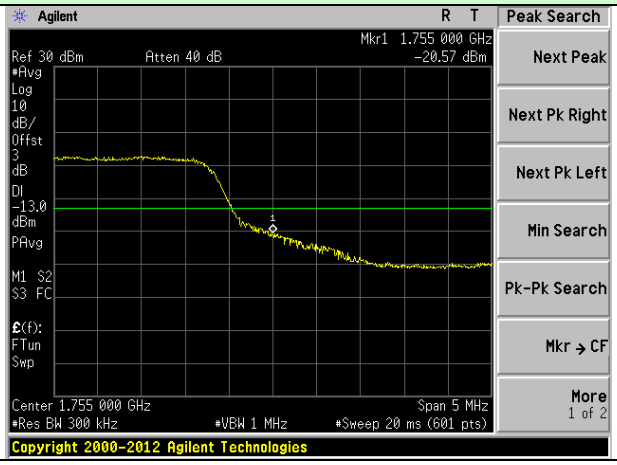
Lowest channel	Highest channel

20MHz Bandwidth (RB size:1# RB offset:0#)	20MHz Bandwidth (RB size:1# RB offset:24#)
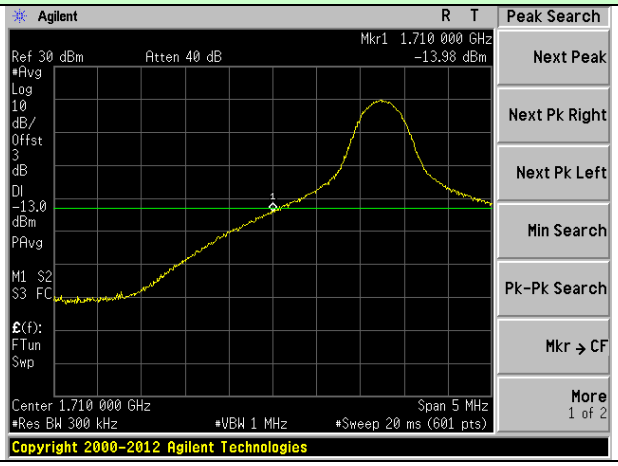	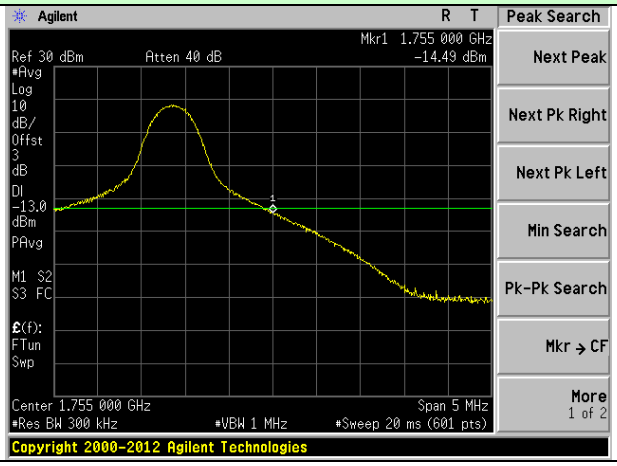
Lowest channel	Highest channel

20MHz Bandwidth (RB size:12# RB offset:0#)	20MHz Bandwidth (RB size:12# RB offset:13#)
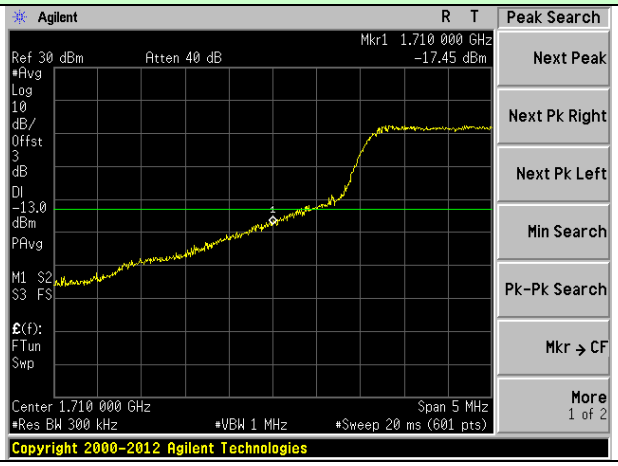	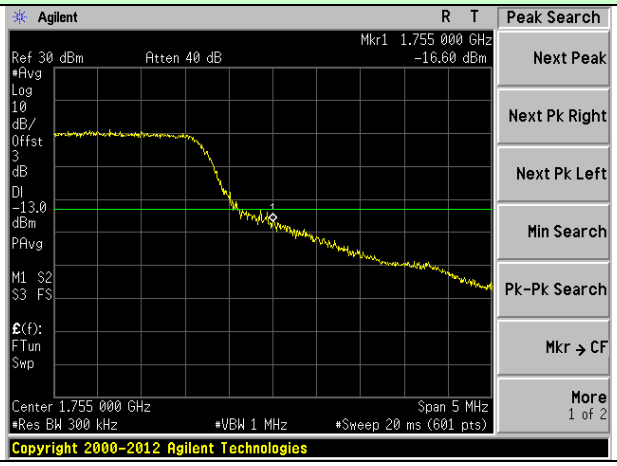
Lowest channel	Highest channel

20MHz Bandwidth (RB size:25# RB offset:0#)	20MHz Bandwidth (RB size:25# RB offset:0#)
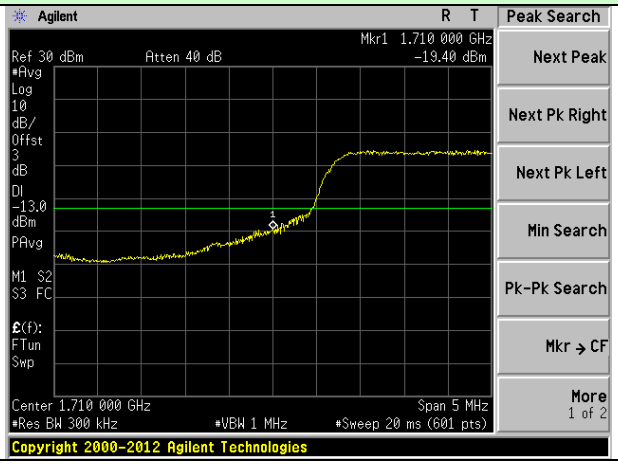	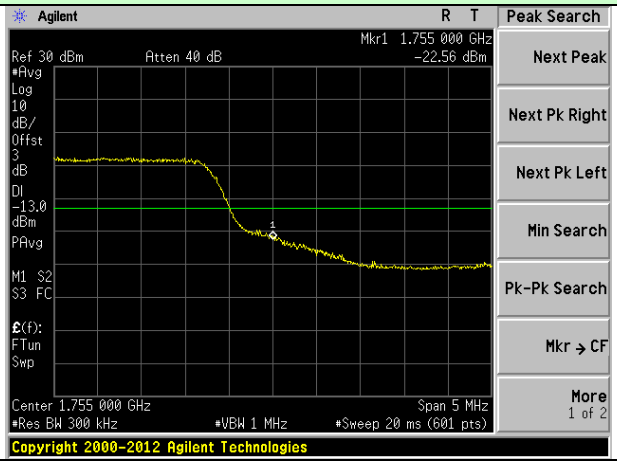
Lowest channel	Highest channel

LTE Band 13(16QAM mode):

5MHz Bandwidth (RB size:1# RB offset:0#)	5MHz Bandwidth (RB size:1# RB offset:24#)
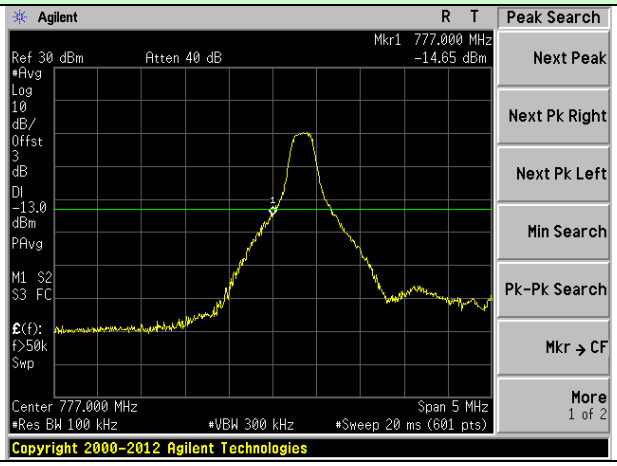	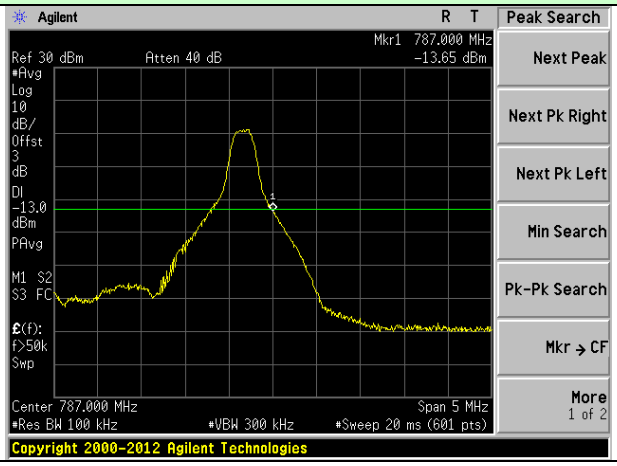
Lowest channel	Highest channel

5MHz Bandwidth (RB size:12# RB offset:0#)	5MHz Bandwidth (RB size:12# RB offset:13#)
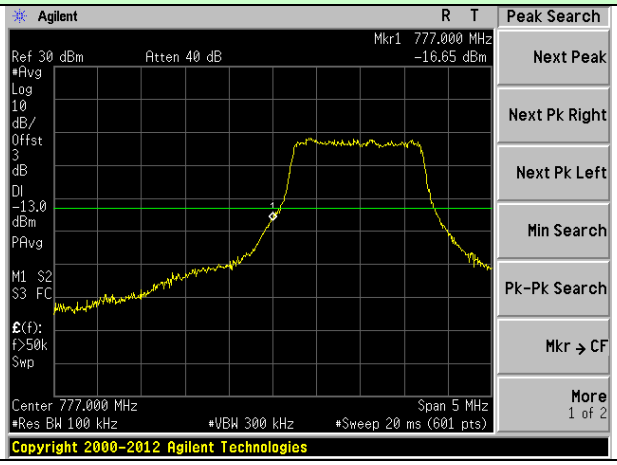	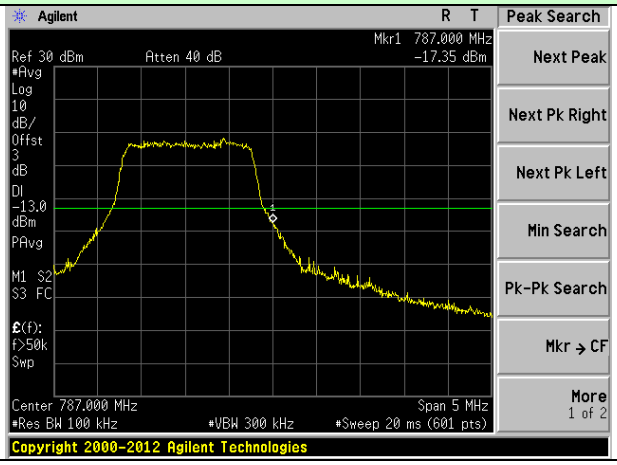
Lowest channel	Highest channel

5MHz Bandwidth (RB size:25# RB offset:0#)	5MHz Bandwidth (RB size:25# RB offset:0#)
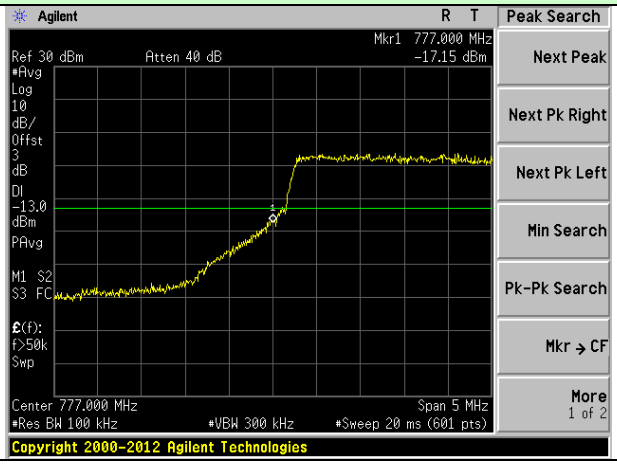	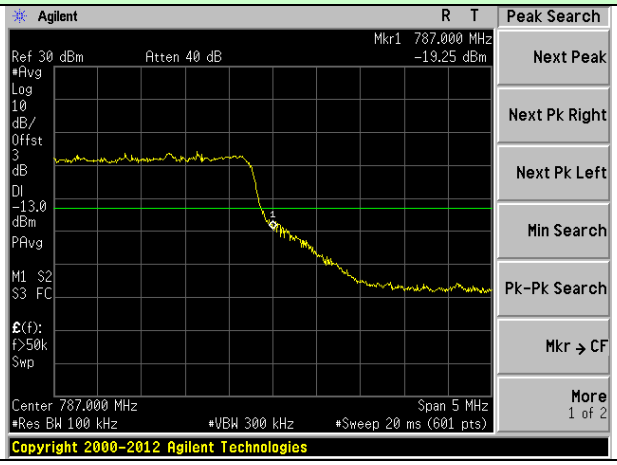
Lowest channel	Highest channel

10MHz Bandwidth (RB size:1# RB offset:0#)	10MHz Bandwidth (RB size:1# RB offset:24#)
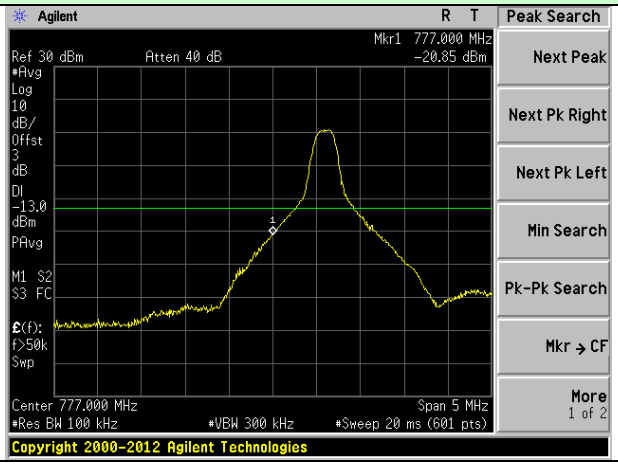	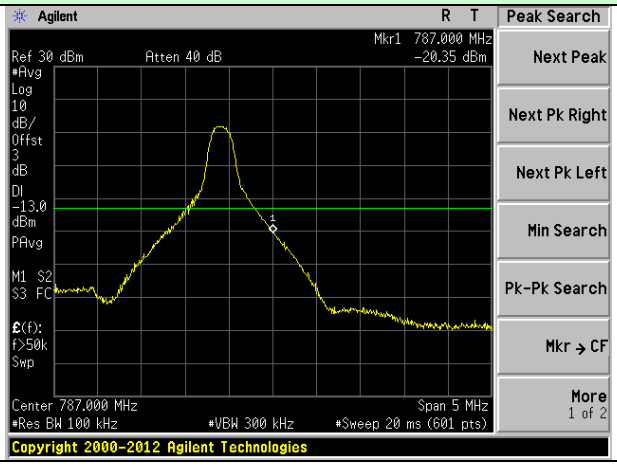
Lowest channel	Highest channel

10MHz Bandwidth (RB size:12# RB offset:0#)	10MHz Bandwidth (RB size:12# RB offset:13#)
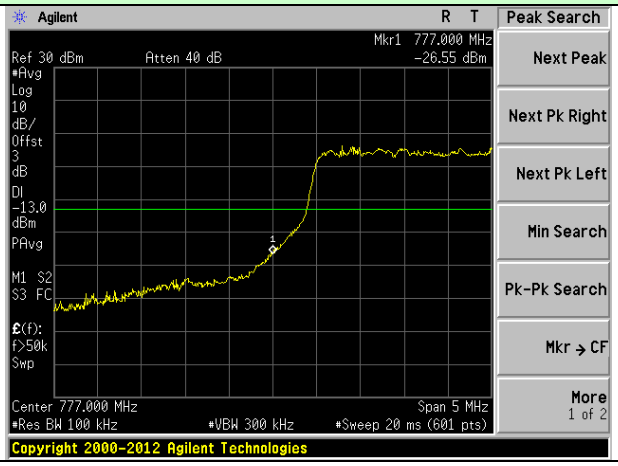	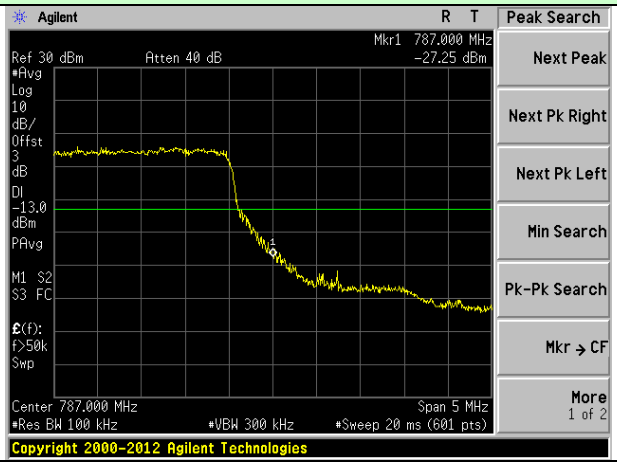
Lowest channel	Highest channel

10MHz Bandwidth (RB size:25# RB offset:0#)	10MHz Bandwidth (RB size:25# RB offset:0#)
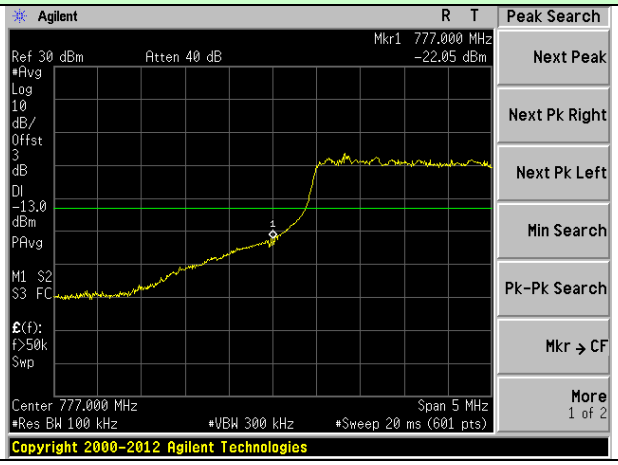	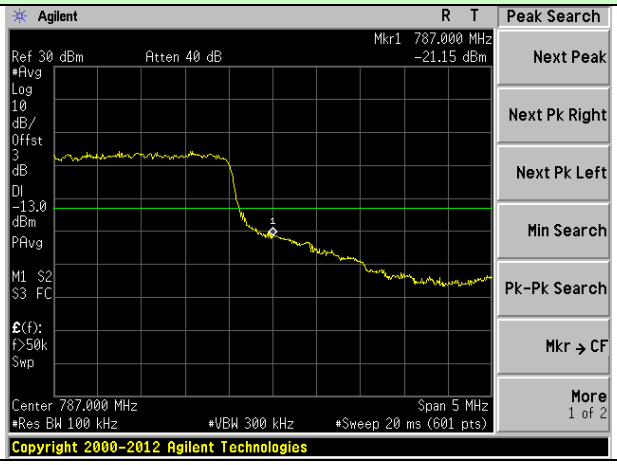
Lowest channel	Highest channel

7.8 ERP, EIRP Measurement

Test Requirement:	Part 27.50(b)(9)/(d)(4)
Test Method:	FCC part2.1046
Limit:	LTE Band 4: 1W (EIRP) LTE Band 13: 30W (ERP)
Test setup:	Below 1GHz 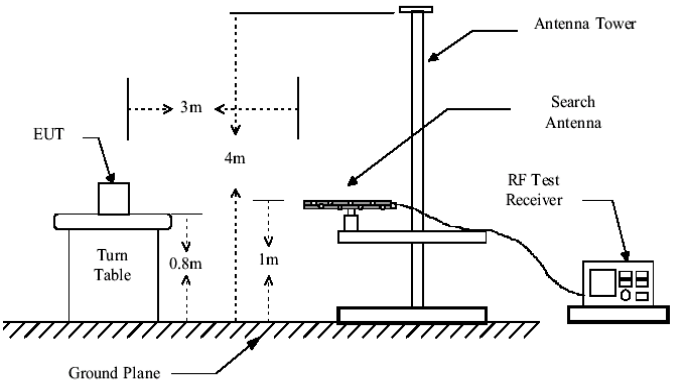 Above 1GHz 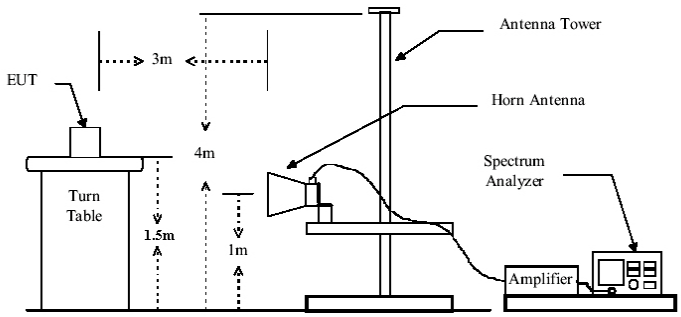 Substituted method: 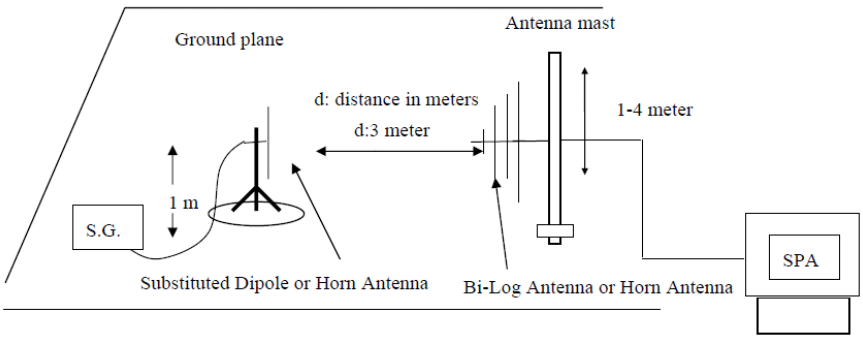

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 777–787MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated asfollows: ERP = S.G. output (dBm) + Antenna Gain (dBd) – Cable Loss (dB) 4. EIRP in frequency band 1710–1755MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

QPSK mode:

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (1.4MHz)	Lowest	H	V	22.80	30.00	Pass
			H	22.45		
		E1	V	22.70		
			H	21.50		
		E2	V	22.11		
			H	22.20		
	Middle	H	V	22.52	30.00	Pass
			H	21.89		
		E1	V	22.41		
			H	21.47		
		E2	V	22.45		
			H	21.58		
	Highest	H	V	22.05	30.00	Pass
			H	21.63		
		E1	V	22.74		
			H	21.48		
		E2	V	22.25		
			H	21.70		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (3MHz)	Lowest	H	V	22.43	30.00	Pass
			H	21.97		
		E1	V	22.75		
			H	22.40		
		E2	V	22.04		
			H	21.28		
	Middle	H	V	22.19	30.00	Pass
			H	21.57		
		E1	V	22.80		
			H	22.47		
		E2	V	22.32		
			H	21.57		
	Highest	H	V	22.80	30.00	Pass
			H	22.63		
		E1	V	22.71		
			H	21.49		
		E2	V	22.25		
			H	21.83		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (5MHz)	Lowest	H	V	22.65	30.00	Pass
			H	21.45		
		E1	V	22.29		
			H	21.81		
		E2	V	21.87		
			H	21.54		
	Middle	H	V	22.41	30.00	Pass
			H	21.85		
		E1	V	22.01		
			H	21.65		
		E2	V	22.42		
			H	21.79		
	Highest	H	V	22.28	30.00	Pass
			H	21.98		
		E1	V	22.13		
			H	21.77		
		E2	V	22.70		
			H	21.45		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (10MHz)	Lowest	H	V	22.30	30.00	Pass
			H	22.24		
		E1	V	21.87		
			H	22.10		
		E2	V	21.71		
			H	22.25		
	Middle	H	V	21.23	30.00	Pass
			H	22.40		
		E1	V	21.85		
			H	21.96		
		E2	V	21.58		
			H	21.40		
	Highest	H	V	21.86	30.00	Pass
			H	22.02		
		E1	V	21.78		
			H	22.12		
		E2	V	21.59		
			H	22.41		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (15MHz)	Lowest	H	V	22.20	30.00	Pass
			H	21.52		
		E1	V	21.89		
			H	22.12		
		E2	V	21.91		
			H	21.14		
	Middle	H	V	22.18	30.00	Pass
			H	21.30		
		E1	V	22.51		
			H	21.45		
		E2	V	21.83		
			H	22.02		
	Highest	H	V	21.87	30.00	Pass
			H	22.04		
		E1	V	21.96		
			H	22.04		
		E2	V	21.84		
			H	22.13		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (20MHz)	Lowest	H	V	22.45	30.00	Pass
			H	21.97		
		E1	V	21.78		
			H	22.03		
		E2	V	22.12		
			H	21.28		
	Middle	H	V	21.19	30.00	Pass
			H	21.50		
		E1	V	21.86		
			H	21.45		
		E2	V	22.53		
			H	21.59		
	Highest	H	V	21.89	30.00	Pass
			H	21.75		
		E1	V	22.23		
			H	21.58		
		E2	V	22.01		
			H	21.76		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
LTE Band 13 (5MHz)	Lowest	H	V	21.77	44.77	Pass
			H	21.75		
		E1	V	22.05		
			H	21.85		
		E2	V	21.78		
			H	21.45		
	Middle	H	V	22.01	44.77	Pass
			H	21.45		
		E1	V	21.70		
			H	21.38		
		E2	V	21.49		
			H	21.30		
	Highest	H	V	21.78	44.77	Pass
			H	21.96		
		E1	V	21.68		
			H	21.39		
		E2	V	21.18		
			H	21.60		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
LTE Band 13 (10MHz)	Middle	H	V	22.05	44.77	Pass
			H	21.43		
		E1	V	21.78		
			H	21.28		
		E2	V	21.47		
			H	21.38		

16QAM mode:

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (1.4MHz)	Lowest	H	V	22.94	30.00	Pass
			H	20.94		
		E1	V	22.71		
			H	20.37		
		E2	V	22.02		
			H	19.24		
	Middle	H	V	23.11	30.00	Pass
			H	20.53		
		E1	V	22.84		
			H	20.42		
		E2	V	22.61		
			H	19.54		
	Highest	H	V	22.84	30.00	Pass
			H	20.59		
		E1	V	22.71		
			H	20.44		
		E2	V	22.26		
			H	19.73		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (3MHz)	Lowest	H	V	22.89	30.00	Pass
			H	20.89		
		E1	V	22.65		
			H	20.30		
		E2	V	21.95		
			H	19.16		
	Middle	H	V	23.04	30.00	Pass
			H	20.45		
		E1	V	22.75		
			H	20.33		
		E2	V	22.53		
			H	19.45		
	Highest	H	V	22.77	30.00	Pass
			H	20.52		
		E1	V	22.63		
			H	20.35		
		E2	V	22.20		
			H	19.66		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (5MHz)	Lowest	H	V	22.87	30.00	Pass
			H	20.86		
		E1	V	22.62		
			H	20.27		
		E2	V	21.92		
			H	19.12		
	Middle	H	V	23.00	30.00	Pass
			H	20.41		
		E1	V	22.70		
			H	20.28		
		E2	V	22.49		
			H	19.41		
	Highest	H	V	22.74	30.00	Pass
			H	20.48		
		E1	V	22.59		
			H	20.31		
		E2	V	22.17		
			H	19.63		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (10MHz)	Lowest	H	V	22.73	30.00	Pass
			H	20.71		
		E1	V	22.46		
			H	20.09		
		E2	V	21.72		
			H	18.91		
	Middle	H	V	22.81	30.00	Pass
			H	20.18		
		E1	V	22.45		
			H	20.01		
		E2	V	22.26		
			H	19.16		
	Highest	H	V	22.55	30.00	Pass
			H	20.28		
		E1	V	22.37		
			H	20.07		
		E2	V	22.01		
			H	19.45		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (15MHz)	Lowest	H	V	22.70	30.00	Pass
			H	20.68		
		E1	V	22.41		
			H	20.04		
		E2	V	21.67		
			H	18.85		
	Middle	H	V	22.76	30.00	Pass
			H	20.12		
		E1	V	22.39		
			H	19.94		
		E2	V	22.21		
			H	19.10		
	Highest	H	V	22.50	30.00	Pass
			H	20.23		
		E1	V	22.32		
			H	20.01		
		E2	V	21.97		
			H	19.41		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
LTE Band 4 (20MHz)	Lowest	H	V	22.61	30.00	Pass
			H	20.57		
		E1	V	22.30		
			H	19.91		
		E2	V	21.52		
			H	18.70		
	Middle	H	V	22.63	30.00	Pass
			H	19.95		
		E1	V	22.21		
			H	19.75		
		E2	V	22.05		
			H	18.93		
	Highest	H	V	22.37	30.00	Pass
			H	20.08		
		E1	V	22.16		
			H	19.84		
		E2	V	21.86		
			H	19.28		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
LTE Band 13 (5MHz)	Lowest	H	V	22.55	44.77	Pass
			H	20.51		
		E1	V	22.23		
			H	19.83		
		E2	V	21.44		
			H	18.61		
	Middle	H	V	22.55	44.77	Pass
			H	19.86		
		E1	V	22.10		
			H	19.64		
		E2	V	21.95		
			H	18.83		
	Highest	H	V	22.29	44.77	Pass
			H	20.00		
		E1	V	22.07		
			H	19.74		
		E2	V	21.79		
			H	19.21		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
LTE Band 13 (10MHz)	Middle	H	V	22.51	44.77	Pass
			H	20.47		
		E1	V	22.18		
			H	19.78		
		E2	V	21.38		
			H	18.55		

7.9 Field strength of spurious radiation measurement

Test Requirement:	FCC Part 27.53(h)/(f)/(c)(2)
Test Method:	FCC part2.1053
Limit:	Band 4/13:-13dBm, For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals.
Test setup:	Below 1GHz 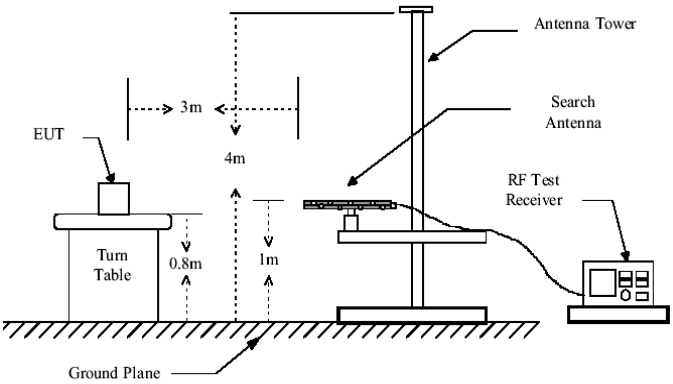 Above 1GHz 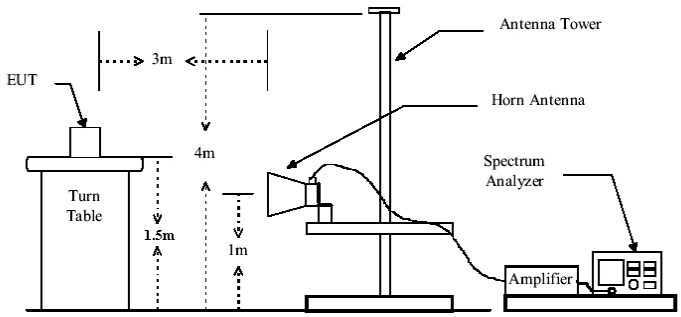 Substituted method: 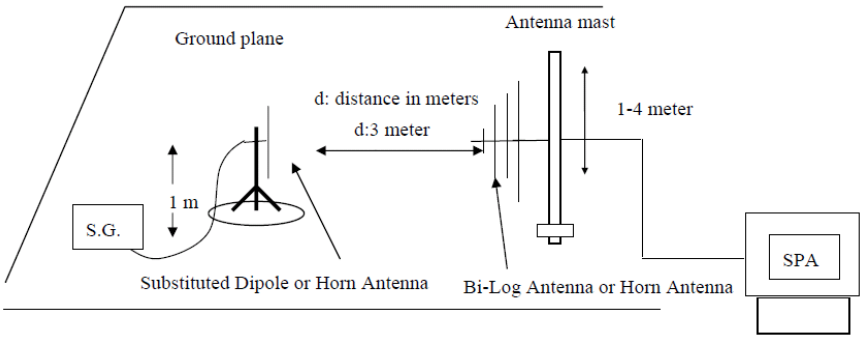

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. ERP / EIRP = S.G. output (dBm) + Antenna Gain(dB/dBi) – Cable Loss (dB)
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

QPSK mode:

Test mode:	LTE Band 4(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3421.40	Vertical	-37.16	-13.00	Pass
5132.10	V	-39.53		
6842.80	V	-41.50		
8553.50	V	-43.39		
10264.20	V	---		
3421.40	Horizontal	-41.72	-13.00	Pass
5132.10	H	-45.09		
6842.80	H	-46.43		
8553.50	H	-48.80		
10264.20	H	---		
Test mode:	**LTE Band 4(1.4MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-35.02	-13.00	Pass
5197.50	V	-37.47		
6930.00	V	-39.49		
8662.50	V	-41.46		
10395.00	V	---		
3465.00	Horizontal	-39.74	-13.00	Pass
5197.50	H	-43.20		
6930.00	H	-44.60		
8662.50	H	-47.04		
10395.00	H	---		
Test mode:	**LTE Band 4(1.4MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3508.60	Vertical	-35.80	-13.00	Pass
5262.90	V	-38.19		
7017.20	V	-40.17		
8771.50	V	-42.07		
10525.80	V	---		
3508.60	Horizontal	-40.39	-13.00	Pass
5262.90	H	-43.78		
7017.20	H	-45.14		
8771.50	H	-47.53		
10525.80	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 4(3MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3423.00	Vertical	-35.99	-13.00	Pass
5134.50	V	-38.22		
6846.00	V	-39.97		
8557.50	V	-41.79		
10269.00	V	---		
3423.00	Horizontal	-40.15	-13.00	Pass
5134.50	H	-43.81		
6846.00	H	-44.85		
8557.50	H	-47.23		
10269.00	H	---		
Test mode:	**LTE Band 4(3MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-33.67	-13.00	Pass
5197.50	V	-35.99		
6930.00	V	-37.79		
8662.50	V	-39.69		
10395.00	V	---		
3465.00	Horizontal	-38.00	-13.00	Pass
5197.50	H	-41.76		
6930.00	H	-42.86		
8662.50	H	-45.33		
10395.00	H	---		
Test mode:	**LTE Band 4(3MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3507.00	Vertical	-34.72	-13.00	Pass
5260.50	V	-36.97		
7014.00	V	-38.72		
8767.50	V	-40.55		
10521.00	V	---		
3507.00	Horizontal	-38.91	-13.00	Pass
5260.50	H	-42.58		
7014.00	H	-43.63		
8767.50	H	-46.03		
10521.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 4(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3425.00	Vertical	-37.56	-13.00	Pass
5137.50	V	-40.50		
6850.00	V	-42.82		
8562.50	V	-45.21		
10275.00	V	---		
3425.00	Horizontal	-43.07	-13.00	Pass
5137.50	H	-47.72		
6850.00	H	-49.18		
8562.50	H	-52.27		
10275.00	H	---		
Test mode:	**LTE Band 4(5MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-38.49	-13.00	Pass
5197.50	V	-41.26		
6930.00	V	-43.44		
8662.50	V	-45.70		
10395.00	V	---		
3465.00	Horizontal	-43.68	-13.00	Pass
5197.50	H	-48.10		
6930.00	H	-49.46		
8662.50	H	-52.38		
10395.00	H	---		
Test mode:	**LTE Band 4(5MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3505.00	Vertical	-37.47	-13.00	Pass
5257.50	V	-40.06		
7010.00	V	-42.09		
8762.50	V	-44.20		
10515.00	V	---		
3505.00	Horizontal	-42.30	-13.00	Pass
5257.50	H	-46.46		
7010.00	H	-47.71		
8762.50	H	-50.45		
10515.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 4(10MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3430.00	Vertical	-36.07	-13.00	Pass
5145.00	V	-39.87		
6860.00	V	-42.38		
8575.00	V	-40.03		
10290.00	V	---		
3430.00	Horizontal	-38.86	-13.00	Pass
5145.00	H	-41.30		
6860.00	H	-46.69		
8575.00	H	-50.38		
10290.00	H	---		
Test mode:	**LTE Band 4(10MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-38.31	-13.00	Pass
5197.50	V	-39.66		
6930.00	V	-43.05		
8662.50	V	-45.64		
10395.00	V	---		
3465.00	Horizontal	-40.73	-13.00	Pass
5197.50	H	-42.37		
6930.00	H	-47.03		
8662.50	H	-49.47		
10395.00	H	---		
Test mode:	**LTE Band 4(10MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3500.00	Vertical	-36.33	-13.00	Pass
5250.00	V	-38.83		
7000.00	V	-41.25		
8750.00	V	-44.27		
10500.00	V	---		
3500.00	Horizontal	-39.68	-13.00	Pass
5250.00	H	-41.87		
7000.00	H	-43.24		
8750.00	H	-49.50		
10500.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 4(15MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3435.00	Vertical	-38.98	-13.00	Pass
5152.50	V	-39.72		
6870.00	V	-40.91		
8587.50	V	-43.26		
10305.00	V	---		
3435.00	Horizontal	-42.14	-13.00	Pass
5152.50	H	-43.53		
6870.00	H	-44.43		
8587.50	H	-47.39		
10305.00	H	---		
Test mode:	**LTE Band 4(15MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-39.53	-13.00	Pass
5197.50	V	-41.69		
6930.00	V	-43.04		
8662.50	V	-47.26		
10395.00	V	---		
3465.00	Horizontal	-42.69	-13.00	Pass
5197.50	H	-43.30		
6930.00	H	-45.51		
8662.50	H	-48.62		
10395.00	H	---		
Test mode:	**LTE Band 4(15MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3495.00	Vertical	-37.15	-13.00	Pass
5242.50	V	-38.62		
6990.00	V	-40.47		
8737.50	V	-41.67		
10485.00	V	---		
3495.00	Horizontal	-42.94	-13.00	Pass
5242.50	H	-46.53		
6990.00	H	-48.60		
8737.50	H	-51.66		
10485.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 4(20MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3440.00	Vertical	-34.82	-13.00	Pass
5160.00	V	-37.60		
6880.00	V	-39.64		
8600.00	V	-41.91		
10320.00	V	---		
3440.00	Horizontal	-40.03	-13.00	Pass
5160.00	H	-43.64		
6880.00	H	-45.18		
8600.00	H	-47.96		
10320.00	H	---		
Test mode:	**LTE Band 4(20MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-36.01	-13.00	Pass
5197.50	V	-38.33		
6930.00	V	-40.01		
8662.50	V	-41.93		
10395.00	V	---		
3465.00	Horizontal	-40.36	-13.00	Pass
5197.50	H	-43.33		
6930.00	H	-44.62		
8662.50	H	-46.96		
10395.00	H	---		
Test mode:	**LTE Band 4(20MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3490.00	Vertical	-36.32	-13.00	Pass
5235.00	V	-38.40		
6980.00	V	-39.85		
8725.00	V	-41.58		
10470.00	V	---		
3490.00	Horizontal	-40.18	-13.00	Pass
5235.00	H	-42.80		
6980.00	H	-43.94		
8725.00	H	-46.02		
10470.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 13(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1559.00	Vertical	-44.37	-40.00	Pass
2338.50	V	-37.46	-13.00	
3118.00	V	-39.25		
3897.50	V	-41.28		
4677.00	V	---		
1559.00	Horizontal	-45.42	-40.00	Pass
2338.50	H	-42.78	-13.00	
3118.00	H	-44.15		
3897.50	H	-46.62		
4677.00	H	---		
Test mode:	**LTE Band 13(5MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1564.00	Vertical	-44.36	-40.00	Pass
2346.00	V	-39.54	-13.00	
3128.00	V	-40.74		
3910.00	V	-43.10		
4692.00	V	---		
1564.00	Horizontal	-44.97	-40.00	Pass
2346.00	H	-43.37	-13.00	
3128.00	H	-44.27		
3910.00	H	-47.25		
4692.00	H	---		
Test mode:	**LTE Band 13(5MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1569.00	Vertical	-44.21	-40.00	Pass
2353.50	V	-38.77	-13.00	
3138.00	V	-41.19		
3922.50	V	-44.21		
4707.00	V	---		
1569.00	Horizontal	-45.61	-40.00	Pass
2353.50	H	-41.81	-13.00	
3138.00	H	-43.18		
3922.50	H	-49.45		
4707.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 13(10MHz)		Test channel:	Middle
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1564.00	Vertical	-43.39	-40.00	Pass
2346.00	V	-39.56	-13.00	
3128.00	V	-42.96		
3910.00	V	-45.54		
4692.00	V	---		
1564.00	Horizontal	-44.33	-40.00	Pass
2346.00	H	-42.28	-13.00	
3128.00	H	-46.95		
3910.00	H	-49.39		
4692.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

16QAM mode:

Test mode:	LTE Band 4(1.4MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3421.40	Vertical	-34.71	-13.00	Pass
5132.10	V	-37.50		
6842.80	V	-39.54		
8553.50	V	-41.81		
10264.20	V	---		
3421.40	Horizontal	-39.93	-13.00	Pass
5132.10	H	-43.54		
6842.80	H	-45.09		
8553.50	H	-47.88		
10264.20	H	---		
Test mode:	**LTE Band 4(1.4MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-35.91	-13.00	Pass
5197.50	V	-38.24		
6930.00	V	-39.92		
8662.50	V	-41.85		
10395.00	V	---		
3465.00	Horizontal	-40.27	-13.00	Pass
5197.50	H	-43.25		
6930.00	H	-44.55		
8662.50	H	-46.89		
10395.00	H	---		
Test mode:	**LTE Band 4(1.4MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3508.60	Vertical	-36.25	-13.00	Pass
5262.90	V	-38.33		
7017.20	V	-39.78		
8771.50	V	-41.51		
10525.80	V	---		
3508.60	Horizontal	-40.12	-13.00	Pass
5262.90	H	-42.74		
7017.20	H	-43.88		
8771.50	H	-45.96		
10525.80	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 4(3MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3423.00	Vertical	-35.10	-13.00	Pass
5134.50	V	-37.55		
6846.00	V	-39.34		
8557.50	V	-41.36		
10269.00	V	---		
3423.00	Horizontal	-39.70	-13.00	Pass
5134.50	H	-42.86		
6846.00	H	-44.22		
8557.50	H	-46.69		
10269.00	H	---		
Test mode:	**LTE Band 4(3MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-33.53	-13.00	Pass
5197.50	V	-36.03		
6930.00	V	-37.84		
8662.50	V	-39.93		
10395.00	V	---		
3465.00	Horizontal	-38.23	-13.00	Pass
5197.50	H	-41.46		
6930.00	H	-42.85		
8662.50	H	-45.36		
10395.00	H	---		
Test mode:	**LTE Band 4(3MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3507.00	Vertical	-34.55	-13.00	Pass
5260.50	V	-36.99		
7014.00	V	-38.75		
8767.50	V	-40.77		
10521.00	V	---		
3507.00	Horizontal	-39.12	-13.00	Pass
5260.50	H	-42.26		
7014.00	H	-43.59		
8767.50	H	-46.03		
10521.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 4(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3425.00	Vertical	-37.25	-13.00	Pass
5137.50	V	-40.39		
6850.00	V	-42.73		
8562.50	V	-45.31		
10275.00	V	---		
3425.00	Horizontal	-43.16	-13.00	Pass
5137.50	H	-47.28		
6850.00	H	-49.04		
8562.50	H	-52.18		
10275.00	H	---		
Test mode:	**LTE Band 4(5MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3465.00	Vertical	-38.33	-13.00	Pass
5197.50	V	-41.30		
6930.00	V	-43.48		
8662.50	V	-45.93		
10395.00	V	---		
3465.00	Horizontal	-43.91	-13.00	Pass
5197.50	H	-47.79		
6930.00	H	-49.43		
8662.50	H	-52.40		
10395.00	H	---		
Test mode:	**LTE Band 4(5MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
3505.00	Vertical	-37.51	-13.00	Pass
5257.50	V	-40.28		
7010.00	V	-42.30		
8762.50	V	-44.60		
10515.00	V	---		
3505.00	Horizontal	-42.71	-13.00	Pass
5257.50	H	-46.32		
7010.00	H	-47.85		
8762.50	H	-50.62		
10515.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Test mode:	LTE Band 13(5MHz)		Test channel:	Lowest
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1559.00	Vertical	-43.58	-40.00	Pass
2338.50	V	-39.60	-13.00	
3118.00	V	-42.99		
3897.50	V	-45.58		
4677.00	V	---		
1559.00	Horizontal	-44.97	-40.00	Pass
2338.50	H	-42.32	-13.00	
3118.00	H	-46.98		
3897.50	H	-49.42		
4677.00	H	---		
Test mode:	**LTE Band 13(5MHz)**		**Test channel:**	**Middle**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1564.00	Vertical	-44.10	-40.00	Pass
2346.00	V	-38.95	-13.00	
3128.00	V	-41.37		
3910.00	V	-44.39		
4692.00	V	---		
1564.00	Horizontal	-43.65	-40.00	Pass
2346.00	H	-41.98	-13.00	
3128.00	H	-43.34		
3910.00	H	-49.60		
4692.00	H	---		
Test mode:	**LTE Band 13(5MHz)**		**Test channel:**	**Highest**
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
	Polarization	Level (dBm)		
1569.00	Vertical	-43.30	-40.00	Pass
2353.50	V	-39.70	-13.00	
3138.00	V	-40.89		
3922.50	V	-43.25		
4707.00	V	---		
1569.00	Horizontal	-44.15	-40.00	Pass
2353.50	H	-43.51	-13.00	
3138.00	H	-44.41		
3922.50	H	-47.37		
4707.00	H	---		

Remark：

1. The emission behaviour belongs to narrowband spurious emission.
2. Remark”---“ means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

7.10 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part2.1055(a)(1)(b)
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	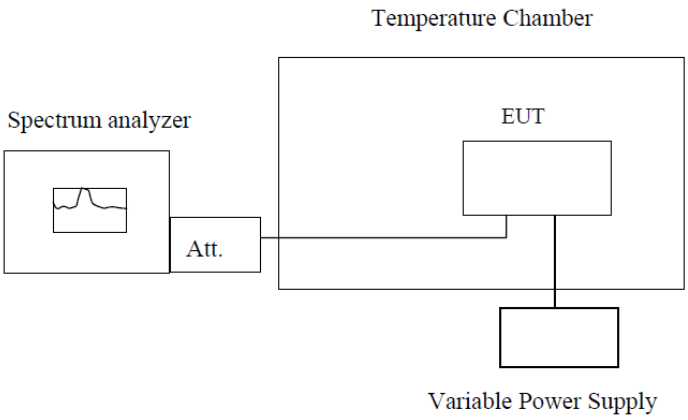 **Note :** Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

QPSK mode:

Reference Frequency: LTE Band 4 Middle channel=20175 channel=1732.5MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.7	-30	30	0.0173	2.5	Pass
	-20	34	0.0196		
	-10	31	0.0179		
	0	28	0.0162		
	10	29	0.0167		
	20	28	0.0162		
	30	39	0.0225		
	40	34	0.0196		
	50	34	0.0196		
Reference Frequency: LTE Band 13 Middle channel=23230 channel=782MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
3.7	-30	53	0.0678	2.5	Pass
	-20	64	0.0818		
	-10	53	0.0678		
	0	46	0.0588		
	10	51	0.0652		
	20	45	0.0575		
	30	75	0.0959		
	40	65	0.0831		
	50	63	0.0806		

16QAM mode:

Reference Frequency: LTE Band 4 Middle channel=20175 channel=1732.5MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.7	-30	23	0.0133	2.5	Pass
	-20	27	0.0156		
	-10	24	0.0139		
	0	22	0.0127		
	10	23	0.0133		
	20	22	0.0127		
	30	29	0.0167		
	40	25	0.0144		
	50	27	0.0156		
Reference Frequency: LTE Band 13 Middle channel=23230 channel=782MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
3.7	-30	51	0.0652	2.5	Pass
	-20	61	0.0780		
	-10	51	0.0652		
	0	44	0.0563		
	10	49	0.0627		
	20	44	0.0563		
	30	72	0.0921		
	40	62	0.0793		
	50	61	0.0780		

7.11 Frequency stability V.S. Voltage measurement

Test Requirement:	FCC Part2.1055(d)(1)(2)
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	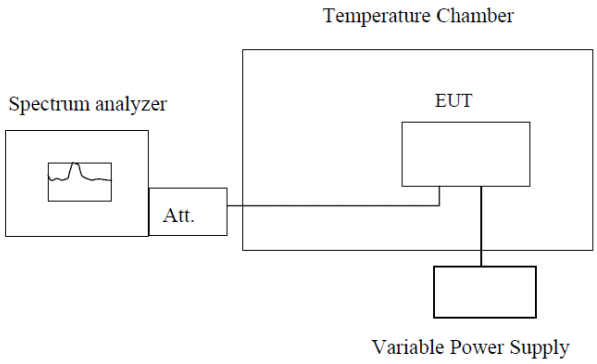 **Note :** Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

QPSK mode:

Reference Frequency: LTE Band 4 Middle channel=20175 channel=1732.5MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	24	0.0139	2.5	Pass
	3.7	17	0.0098		
	3.4	20	0.0115		
Reference Frequency: LTE Band 13 Middle channel=23230channel=782MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	25	0.0320	2.5	Pass
	3.7	31	0.0396		
	3.4	35	0.0448		

16QAM mode:

Reference Frequency: LTE Band 4 Middle channel=20175 channel=1732.5MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	29	0.0371	2.5	Pass
	3.7	21	0.0269		
	3.4	24	0.0307		
Reference Frequency: LTE Band 13 Middle channel=23230channel=782MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.25	28	0.0162	2.5	Pass
	3.7	34	0.0196		
	3.4	39	0.0225		

8 Test Setup Photo

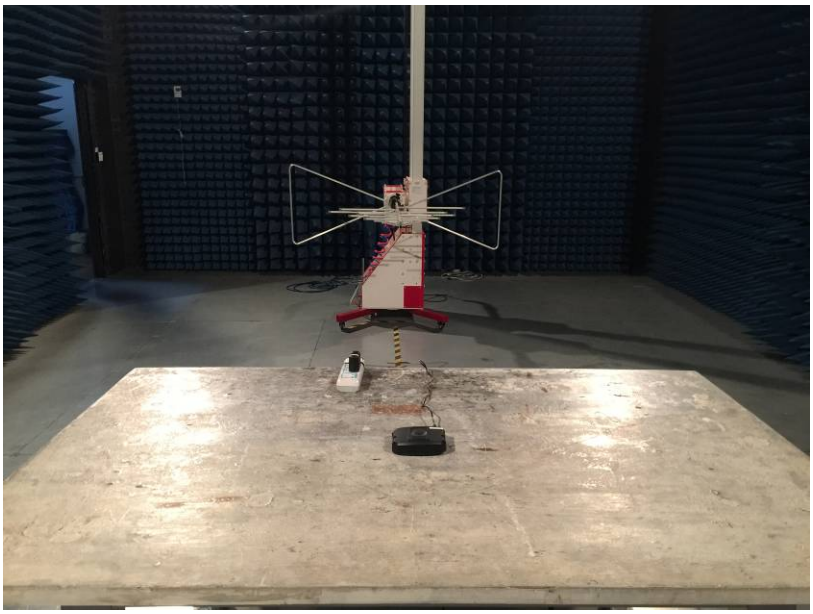

9 EUT Constructional Details

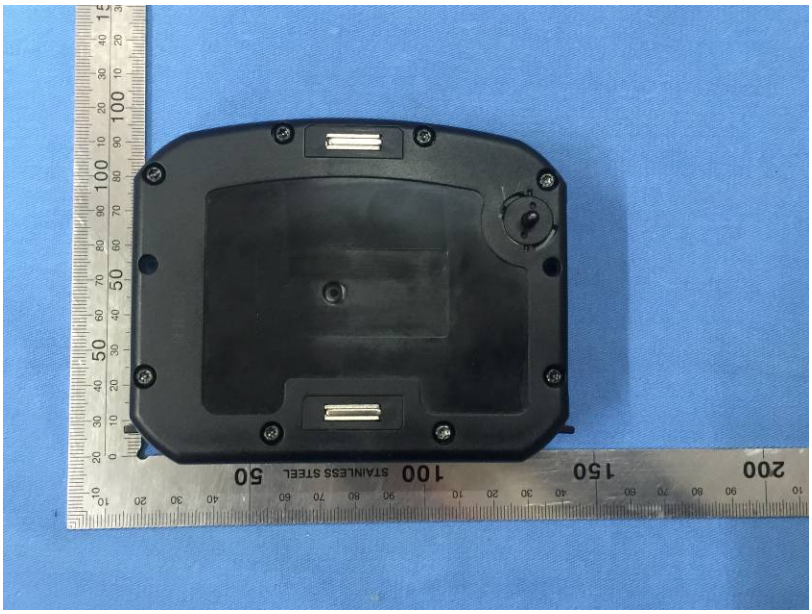
STAINLESS STEEL

STAINLESS STEEL

STAINLESS STEEL

STAINLESS STEEL

STAINLESS STEEL

MOBILELOCK LLC

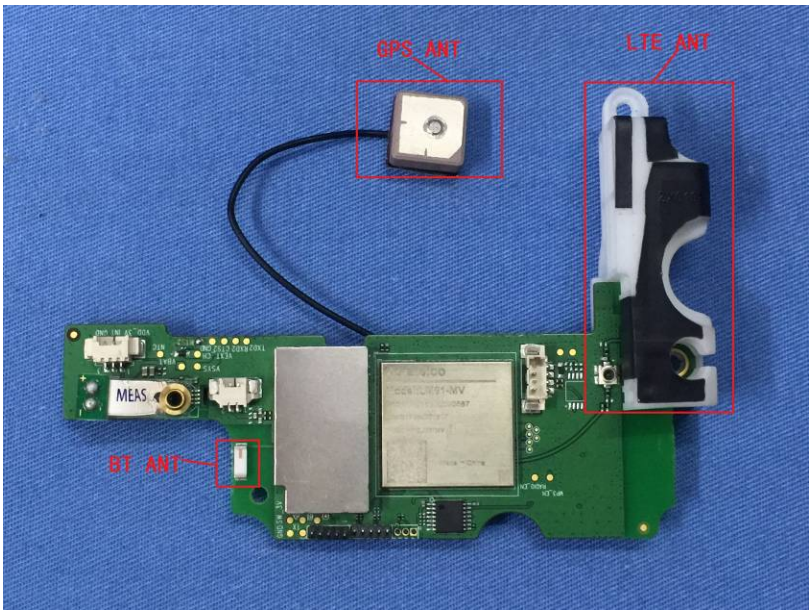
GPS ANT
LTE ANT
BT ANT
MEAS

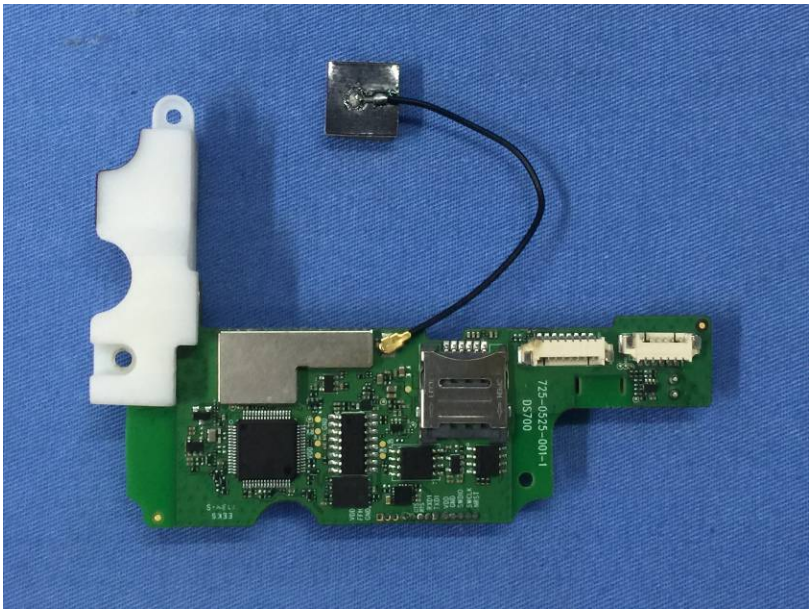

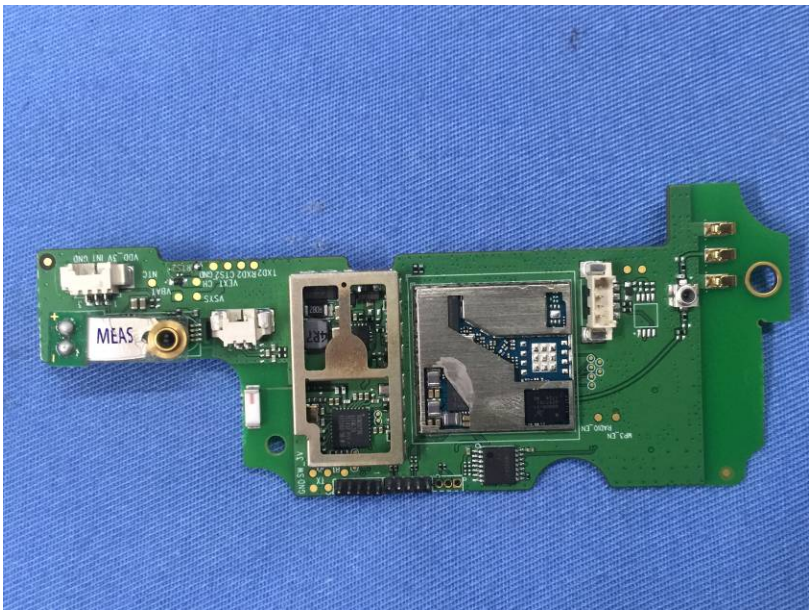
MEAS

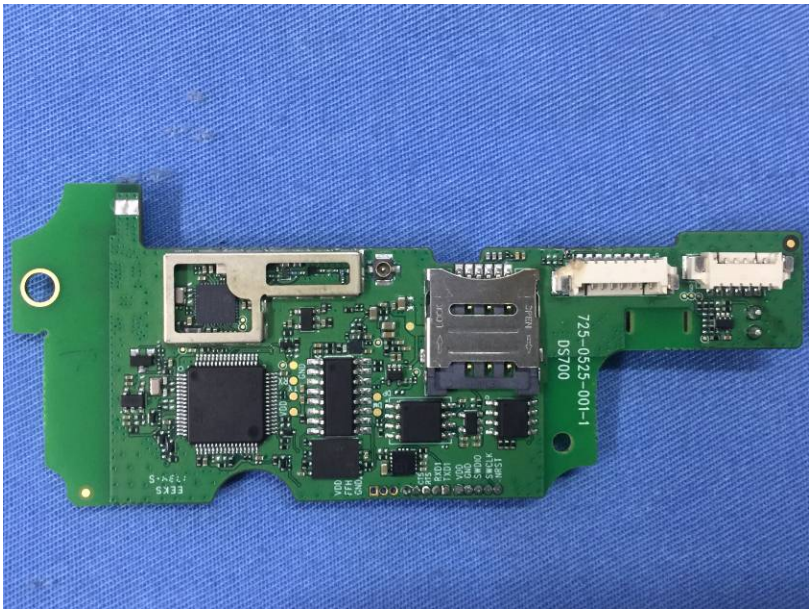
725-0525-001-1
DS700

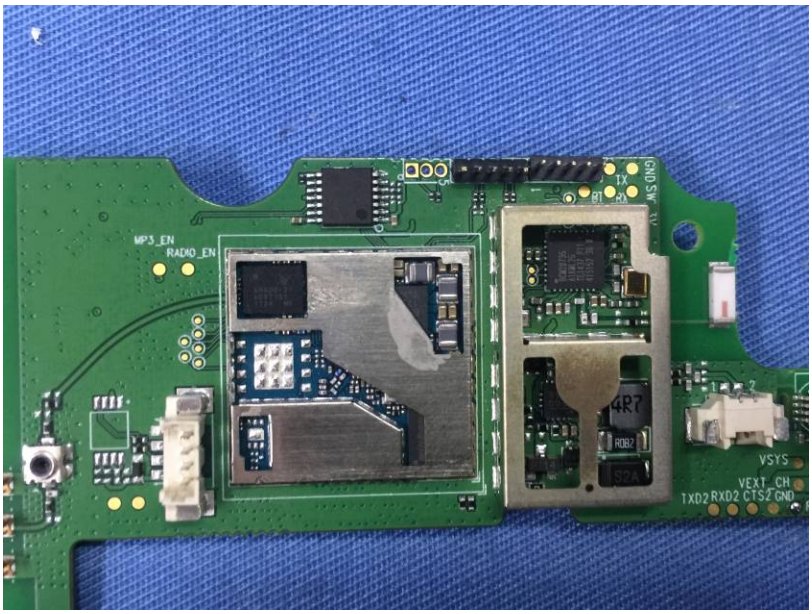
MP3_EN
RADIO_EN
VSYS
VEXT_CH
TXD2 RXD2 CTS2 GND

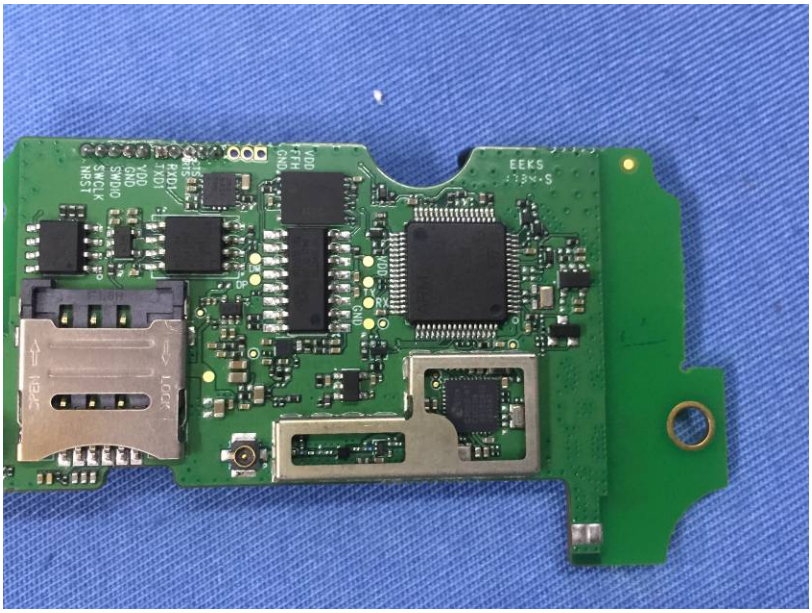

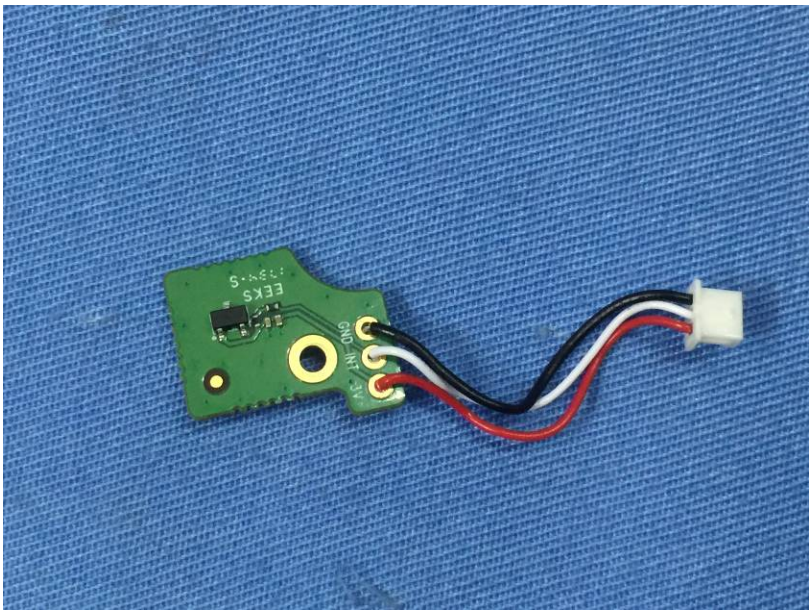
EEKS
GND IN 3V

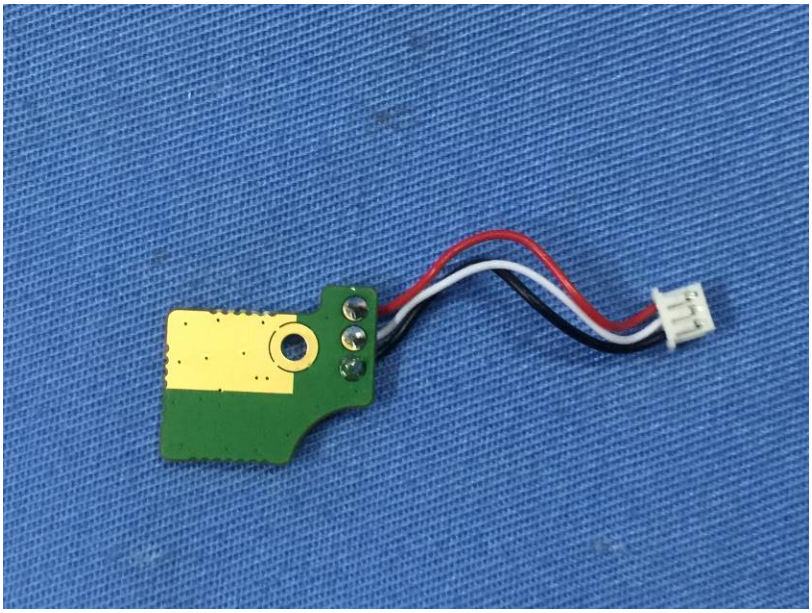

MOBILELOCK LLC
Dual OEM18650H Battery 3.7V Li-ion 19.24Wh
P/N: 2016-04-15
S/N: 1601585
Made in China. Assembled in China.

DEWALT
SWITCHING ADAPTER
MODEL: ASSA1A-045200
INPUT:100-240V~50/60Hz 0.45A
OUTPUT:4.5V ⎓ 2.0A
CONFORMS TO UL STD.
UL60950-1,2nd
CERTIFIED TO CSA STD.
C22.2 NO.60950-1-07
115V
Made in China
REPLACEMENT#632801-01
C UL US
37MW
LISTED E323462
MFG DATE: DEC,2016

-----End------