




TX, 802.11a (Ch 116)
Radiated Spurious Emission, Horizontal

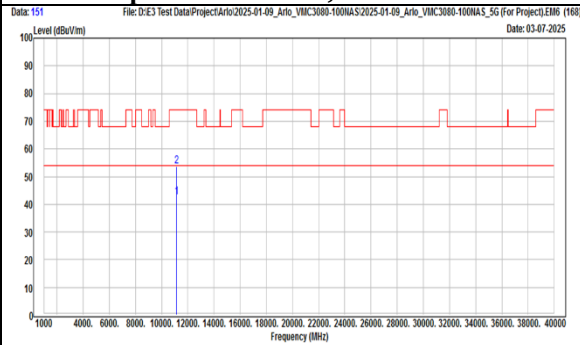


TX, 802.11a (Ch 116)
Radiated Spurious Emission, Vertical

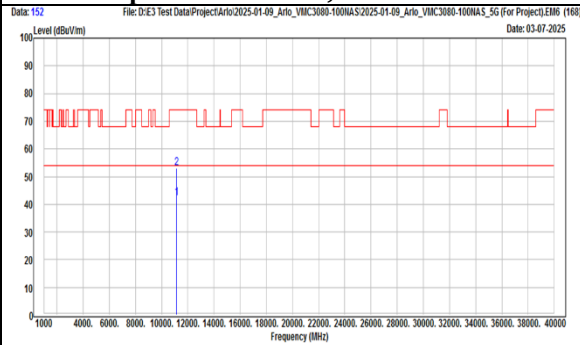


TX, 802.11a (Ch 116)
Band Edge (Average), Horizontal

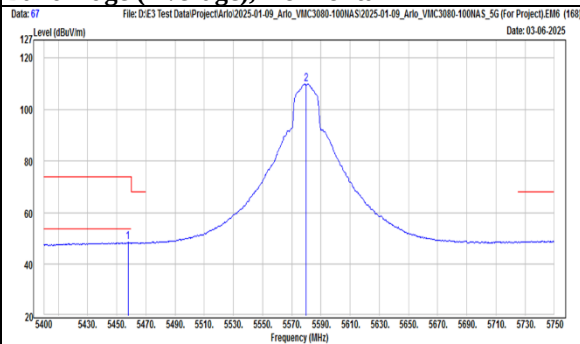


TX, 802.11a (Ch 116)
Band Edge (Average), Vertical

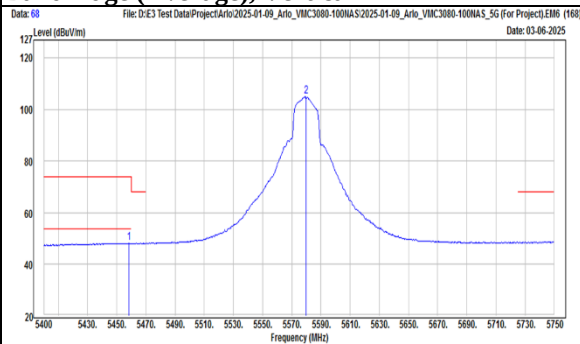

TX, 802.11a (Ch 116)
Band Edge (Peak), Horizontal

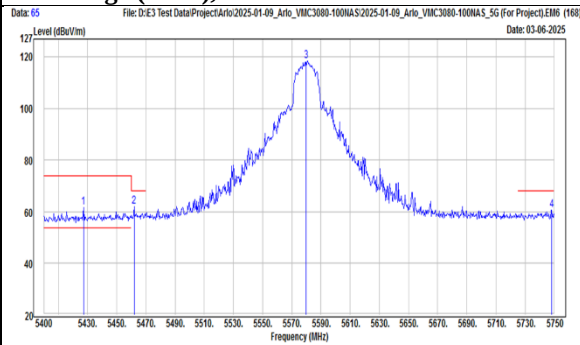

TX, 802.11a (Ch 116)
Band Edge (Peak), Vertical

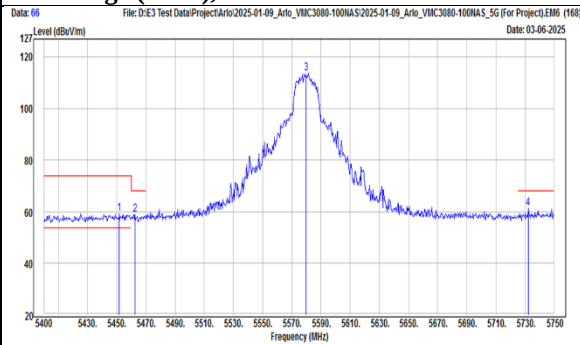

Mode	802.11a	Channel	140
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5451.8	39.79	19.91	59.7	74	-14.3	PK
		5459.85	28.37	19.95	48.32	54	-5.68	AVG
		5466.85	39.51	19.98	59.49	68.2	-8.71	PK
	@	5700	93.44	19.96	113.4	N/A	N/A	PK
	@	5700	84.92	19.96	104.88	N/A	N/A	AVG
		5726.2	47.85	20.21	68.06	68.2	-0.14	PK
		11400	33.97	19.28	53.25	74	-20.75	PK
		11400	22.31	19.28	41.59	54	-12.41	AVG
Vertical		5423.8	40.8	19.76	60.56	74	-13.44	PK
		5449.7	28.25	19.9	48.15	54	-5.85	AVG
		5468.25	39.33	19.99	59.32	68.2	-8.88	PK
	@	5700	88.87	19.96	108.83	N/A	N/A	PK
	@	5700	80.32	19.96	100.28	N/A	N/A	AVG
		5725.5	46.88	20.2	67.08	68.2	-1.12	PK
		11400	31.79	19.28	51.07	74	-22.93	PK
		11400	20.74	19.28	40.02	54	-13.98	AVG

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1


TX, 802.11a (Ch 140)

Radiated Spurious Emission, Horizontal

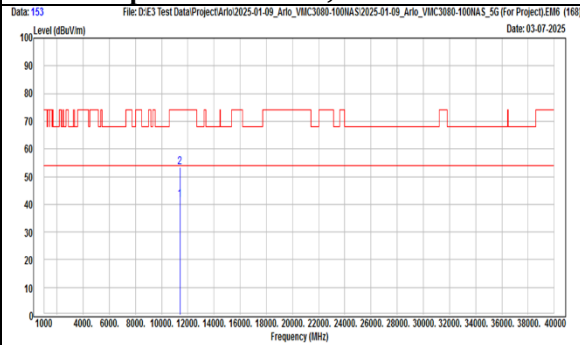


TX, 802.11a (Ch 140)

Radiated Spurious Emission, Vertical

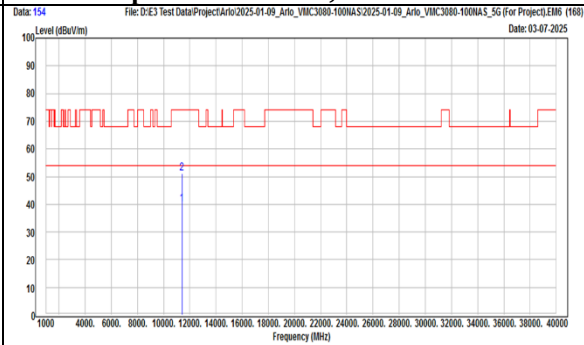


TX, 802.11a (Ch 140)

Band Edge (Average), Horizontal

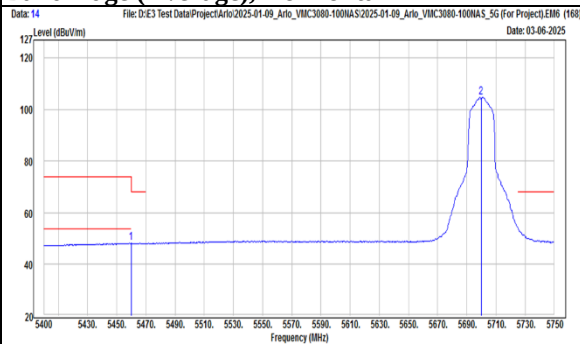


TX, 802.11a (Ch 140)

Band Edge (Average), Vertical

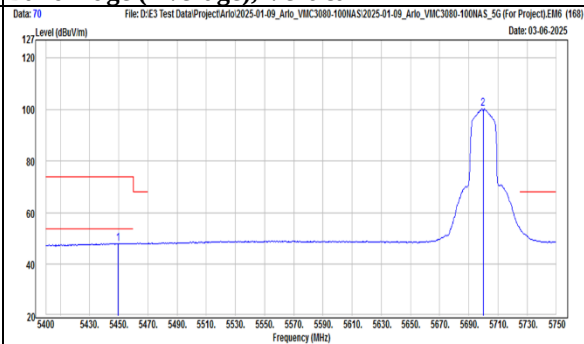


TX, 802.11a (Ch 140)

Band Edge (Peak), Horizontal

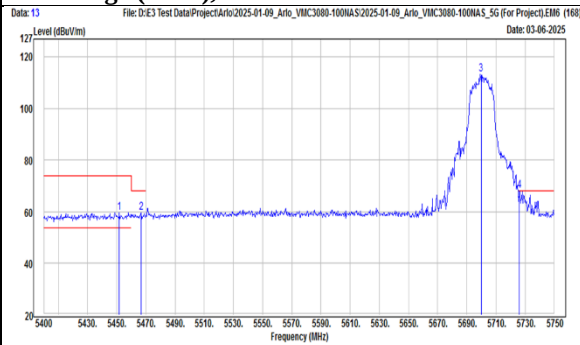


TX, 802.11a (Ch 140)

Band Edge (Peak), Vertical

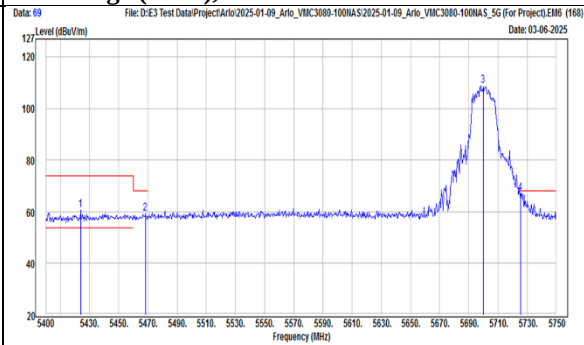

Mode	802.11a	Channel	144
------	---------	---------	-----


Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	*	11440	32.96	19.39	52.35	74	-21.65	PK
Vertical	*	11440	32.63	19.39	52.02	74	-21.98	PK

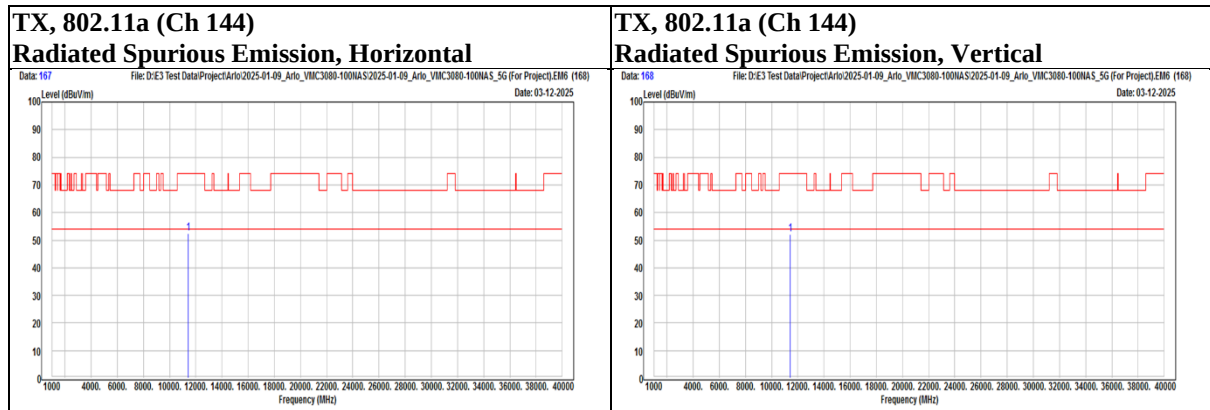


Mode	802.11a	Channel	149
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5650	42.38	20.04	62.42	68.2	-5.78	PK
		5695.5	58.67	19.97	78.64	101.88	-23.24	PK
		5745	98.19	20.39	118.58	N/A	N/A	PK
		11490	37.55	19.52	57.07	74	-16.93	PK
		11490	28.01	19.52	47.53	54	-6.47	AVG
Vertical	@	5598	40.75	20.12	60.87	68.2	-7.33	PK
		5696	50.7	19.97	70.67	102.25	-31.58	PK
		5745	90.99	20.39	111.38	N/A	N/A	PK
		11490	34.82	19.52	54.34	74	-19.66	PK
		11490	25.05	19.52	44.57	54	-9.43	AVG


TX, 802.11a (Ch 149)
Radiated Spurious Emission, Horizontal

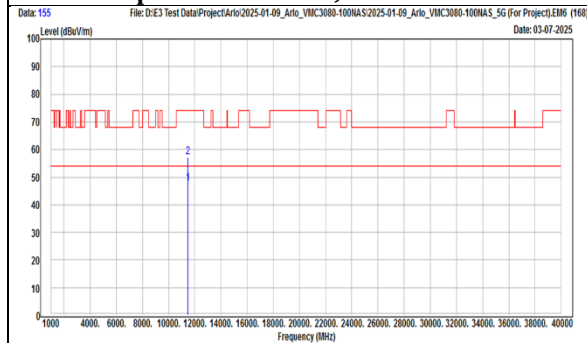


TX, 802.11a (Ch 149)
Radiated Spurious Emission, Vertical

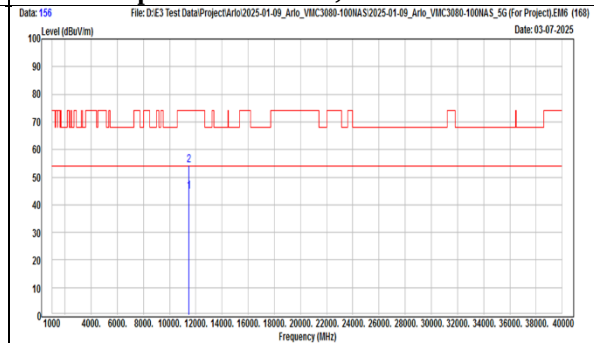

TX, 802.11a (Ch 149)
Band Edge (Peak), Horizontal

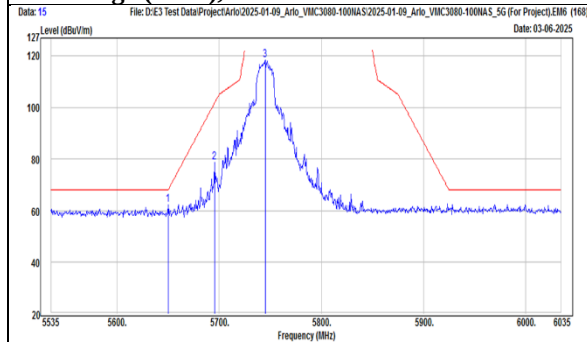


TX, 802.11a (Ch 149)
Band Edge (Peak), Vertical

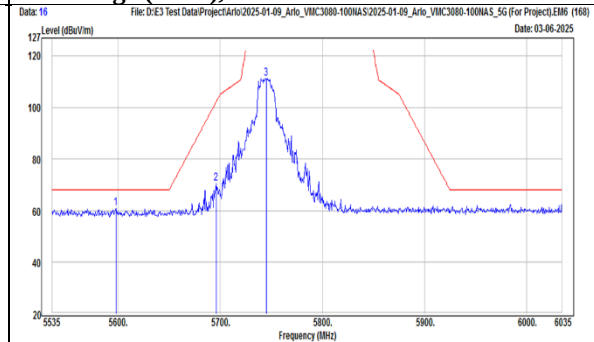


Mode	802.11a	Channel	157
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5579.5	41.8	20.08	61.88	68.2	-6.32	PK
		5673	40.44	20	60.44	85.26	-24.82	PK
	@	5785	96.74	20.83	117.57	N/A	N/A	PK
		5886	40.39	21.27	61.66	97.03	-35.37	PK
		5988.5	40.09	21.33	61.42	68.2	-6.78	PK
		11570	39.02	19.03	58.05	74	-15.95	PK
		11570	28.7	19.03	47.73	54	-6.27	AVG
Vertical		5591	40.84	20.1	60.94	68.2	-7.26	PK
		5652	41.29	20.04	61.33	69.69	-8.36	PK
	@	5785	91.13	20.83	111.96	N/A	N/A	PK
		5889.5	40.42	21.27	61.69	94.44	-32.75	PK
		6004.5	40.66	21.38	62.04	68.2	-6.16	PK
		11570	36.09	19.03	55.12	74	-18.88	PK
		11570	25.15	19.03	44.18	54	-9.82	AVG

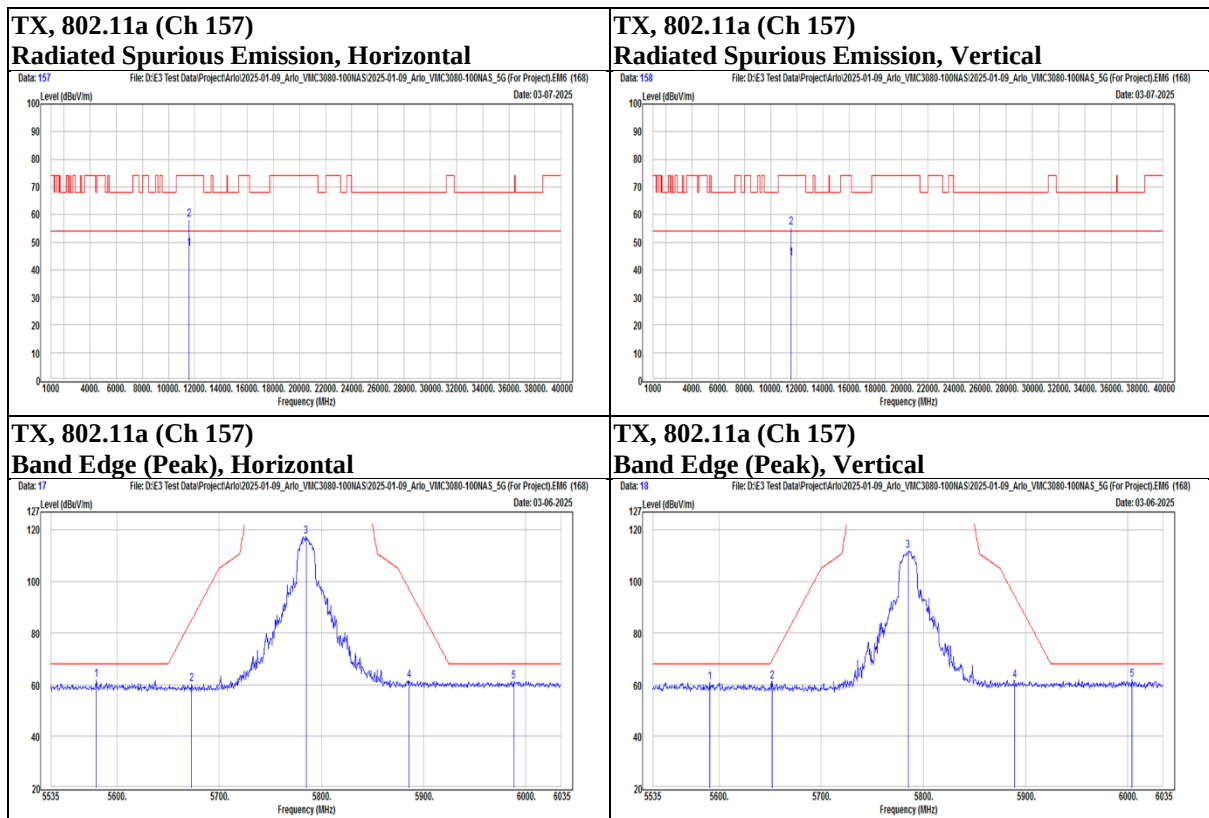

Mode	802.11a	Channel	165
------	---------	---------	-----


Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5825	96.8	21.12	117.92	N/A	N/A	PK
		5875.5	53.21	21.26	74.47	104.83	-30.36	PK
		5974.5	40.86	21.29	62.15	68.2	-6.05	PK
		11650	38.7	18.75	57.45	74	-16.55	PK
		11650	28.69	18.75	47.44	54	-6.56	AVG
Vertical	@	5825	93.91	21.12	115.03	N/A	N/A	PK
		5875	45.09	21.26	66.35	105.2	-38.85	PK
		6002	40.7	21.37	62.07	68.2	-6.13	PK
		11650	36.13	18.75	54.88	74	-19.12	PK
		11650	25.98	18.75	44.73	54	-9.27	AVG

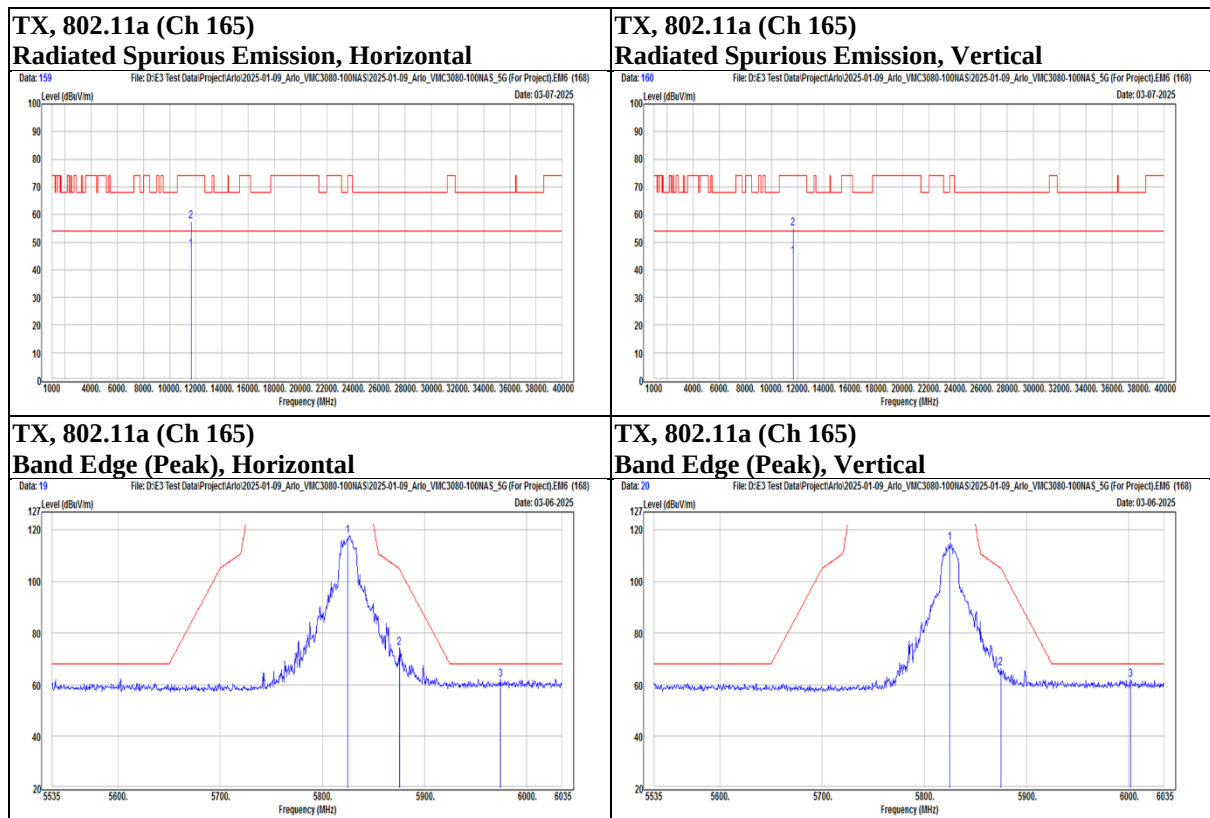


Mode	802.11n(HT20)	Channel	36
------	---------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5147	46.47	19.75	66.22	74	-7.78	PK
		5149.45	33.38	19.76	53.14	54	-0.86	AVG
	@	5180	92.65	19.67	112.32	N/A	N/A	PK
	@	5180	84.82	19.67	104.49	N/A	N/A	AVG
Vertical		5067.9	41.47	19.56	61.03	74	-12.97	PK
		5148.05	28.63	19.76	48.39	54	-5.61	AVG
	@	5180	85.11	19.67	104.78	N/A	N/A	PK
	@	5180	76.69	19.67	96.36	N/A	N/A	AVG


TX, 802.11n(HT20) (Ch 36)
Band Edge (Average), Horizontal

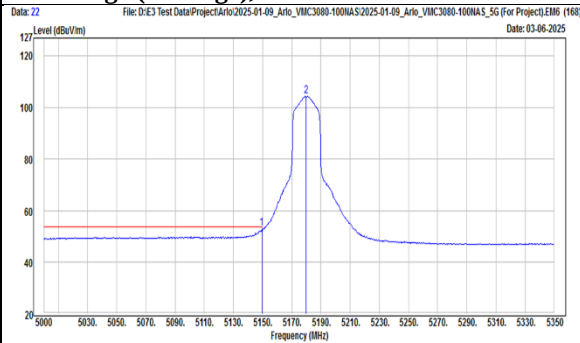


TX, 802.11n(HT20) (Ch 36)
Band Edge (Average), Vertical

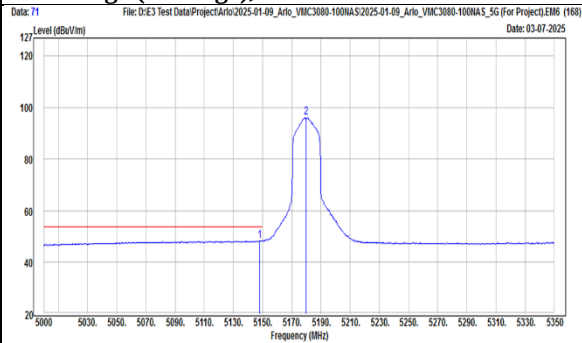

TX, 802.11n(HT20) (Ch 36)
Band Edge (Peak), Horizontal

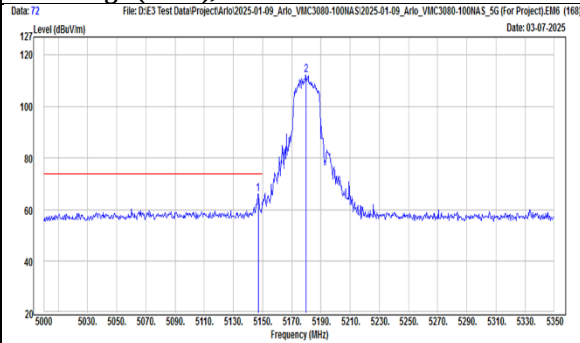


TX, 802.11n(HT20) (Ch 36)
Band Edge (Peak), Vertical

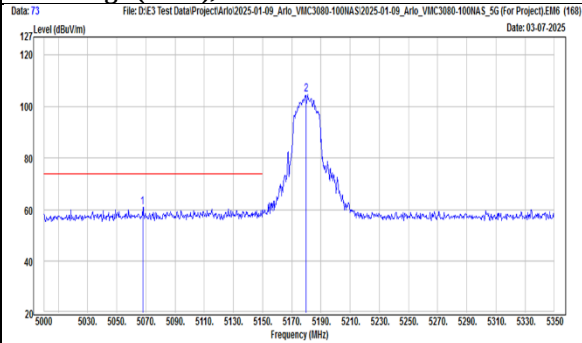


Mode	802.11n(HT20)	Channel	44
------	---------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5117.95	41.39	19.69	61.08	74	-12.92	PK
		5147.7	30.17	19.75	49.92	54	-4.08	AVG
	@	5220	95.95	19.48	115.43	N/A	N/A	PK
	@	5220	88.2	19.48	107.68	N/A	N/A	AVG
Vertical		5089.25	40.5	19.63	60.13	74	-13.87	PK
		5149.8	28.54	19.76	48.3	54	-5.7	AVG
	@	5220	91.73	19.48	111.21	N/A	N/A	PK
	@	5220	82.29	19.48	101.77	N/A	N/A	AVG


TX, 802.11n(HT20) (Ch 44)
Band Edge (Average), Horizontal

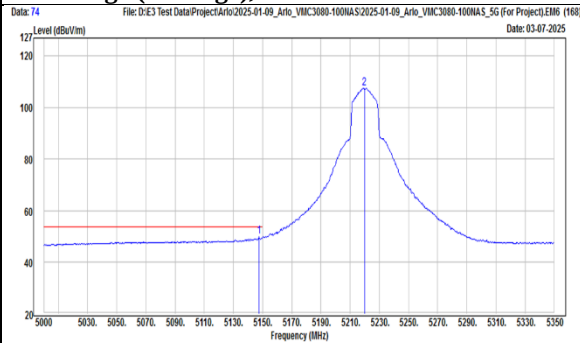


TX, 802.11n(HT20) (Ch 44)
Band Edge (Average), Vertical

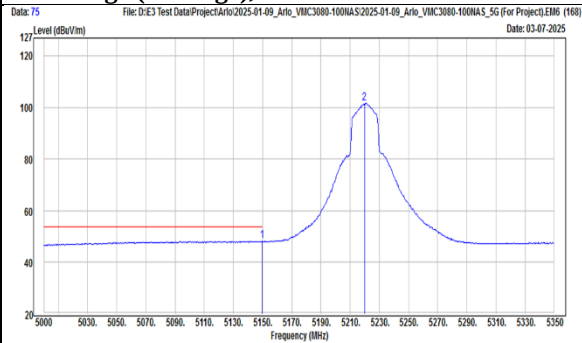

TX, 802.11n(HT20) (Ch 44)
Band Edge (Peak), Horizontal

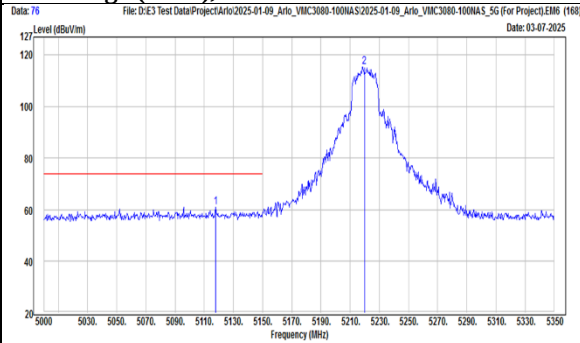


TX, 802.11n(HT20) (Ch 44)
Band Edge (Peak), Vertical

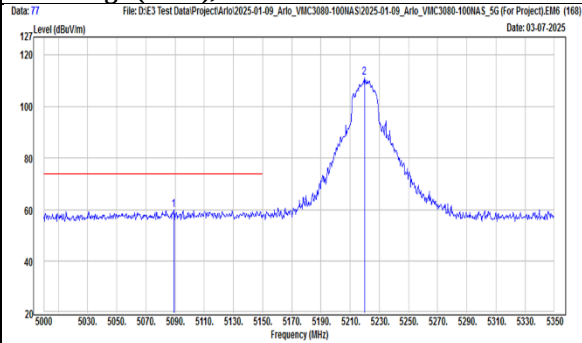


Mode	802.11n(HT20)	Channel	48
------	---------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5127.75	28.62	19.72	48.34	54	-5.66	AVG
		5129.5	40.62	19.72	60.34	74	-13.66	PK
	@	5240	97.05	19.35	116.4	N/A	N/A	PK
	@	5240	88.42	19.35	107.77	N/A	N/A	AVG
Vertical		5032.55	40.66	19.34	60	74	-14	PK
		5144.2	28.47	19.75	48.22	54	-5.78	AVG
	@	5240	90.91	19.35	110.26	N/A	N/A	PK
	@	5240	82.14	19.35	101.49	N/A	N/A	AVG


TX, 802.11n(HT20) (Ch 48)
Band Edge (Average), Horizontal

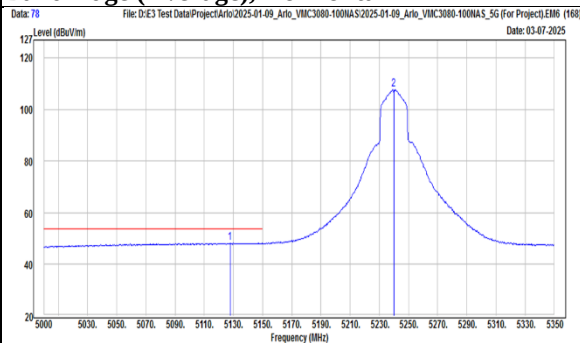


TX, 802.11n(HT20) (Ch 48)
Band Edge (Average), Vertical

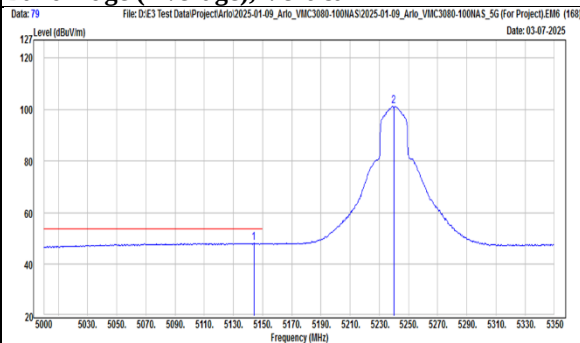

TX, 802.11n(HT20) (Ch 48)
Band Edge (Peak), Horizontal

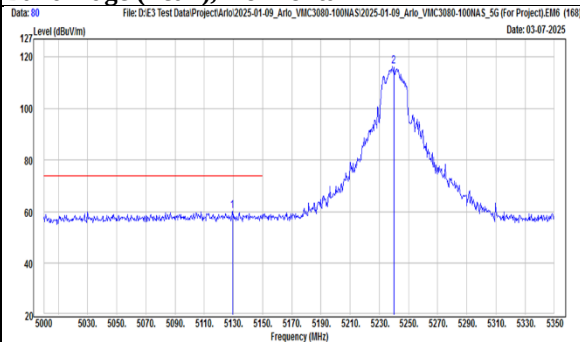


TX, 802.11n(HT20) (Ch 48)
Band Edge (Peak), Vertical

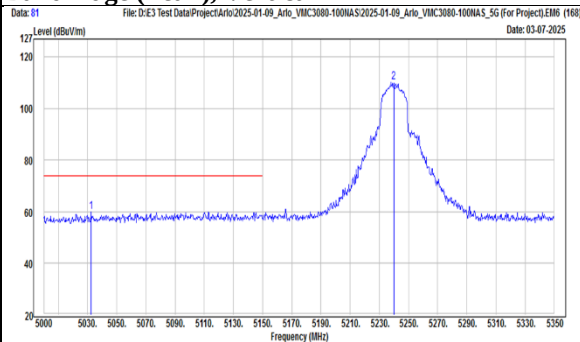


Mode	802.11n(HT20)	Channel	52
------	---------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5260	97.72	19.24	116.96	N/A	N/A	PK
	@	5260	89.08	19.24	108.32	N/A	N/A	AVG
		5449.2	29.08	19.9	48.98	54	-5.02	AVG
		5452.8	40.74	19.92	60.66	74	-13.34	PK
Vertical	@	5260	90.72	19.24	109.96	N/A	N/A	PK
	@	5260	82.19	19.24	101.43	N/A	N/A	AVG
		5437.5	41.22	19.84	61.06	74	-12.94	PK
		5457	28.85	19.93	48.78	54	-5.22	AVG


TX, 802.11n(HT20) (Ch 52)
Band Edge (Average), Horizontal

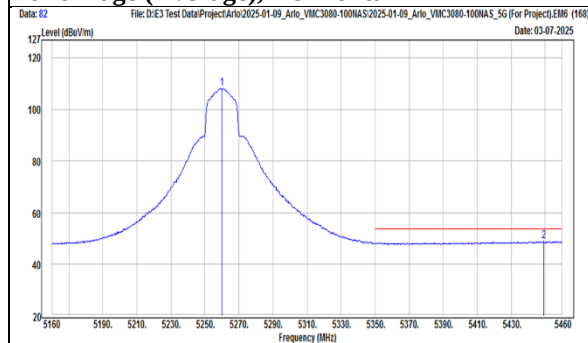


TX, 802.11n(HT20) (Ch 52)
Band Edge (Average), Vertical

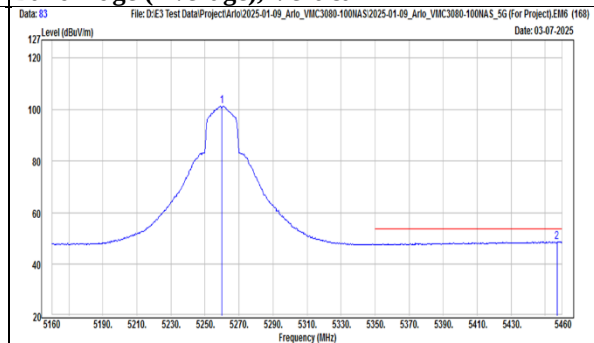

TX, 802.11n(HT20) (Ch 52)
Band Edge (Peak), Horizontal

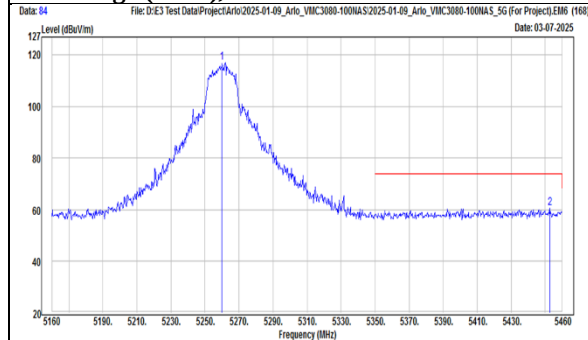


TX, 802.11n(HT20) (Ch 52)
Band Edge (Peak), Vertical

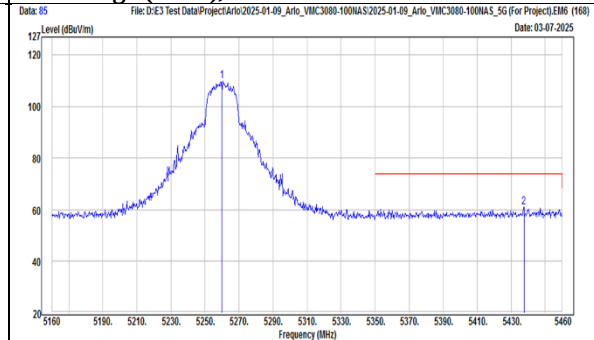


Mode	802.11n(HT20)	Channel	60
------	---------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5300	94.83	19.08	113.91	N/A	N/A	PK
	@	5300	87.25	19.08	106.33	N/A	N/A	AVG
		5350.5	46.11	19.29	65.4	74	-8.6	PK
		5350.5	34.27	19.29	53.56	54	-0.44	AVG
Vertical	@	5300	86.61	19.08	105.69	N/A	N/A	PK
	@	5300	78.93	19.08	98.01	N/A	N/A	AVG
		5350.2	30.06	19.29	49.35	54	-4.65	AVG
		5357.1	41.57	19.34	60.91	74	-13.09	PK


TX, 802.11n(HT20) (Ch 60)
Band Edge (Average), Horizontal

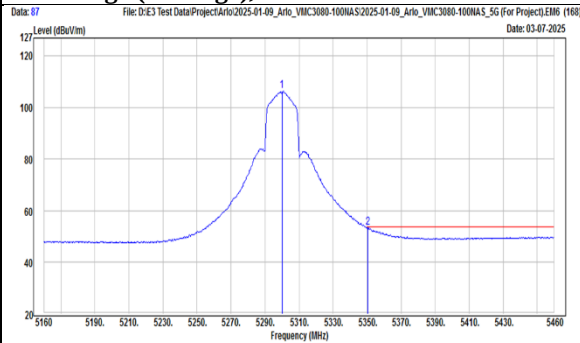


TX, 802.11n(HT20) (Ch 60)
Band Edge (Average), Vertical

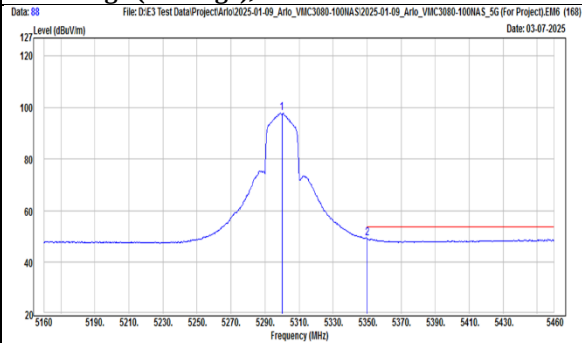

TX, 802.11n(HT20) (Ch 60)
Band Edge (Peak), Horizontal

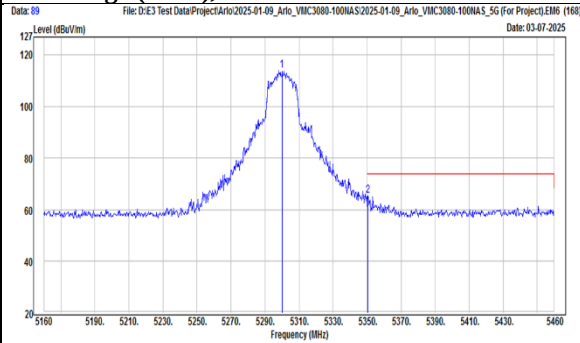


TX, 802.11n(HT20) (Ch 60)
Band Edge (Peak), Vertical

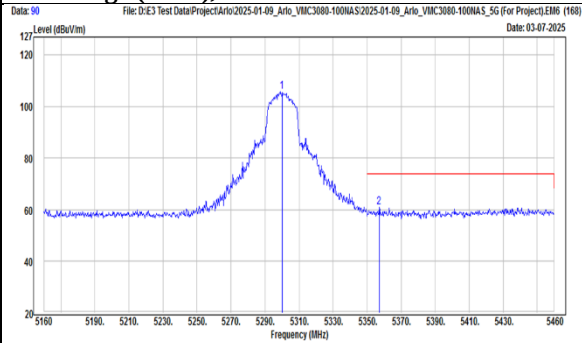


Mode	802.11n(HT20)	Channel	64
------	---------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5320	90.12	19.17	109.29	N/A	N/A	PK
	@	5320	84.3	19.17	103.47	N/A	N/A	AVG
		5350.2	34.56	19.29	53.85	54	-0.15	AVG
		5352.9	46.62	19.31	65.93	74	-8.07	PK
Vertical	@	5320	83.42	19.17	102.59	N/A	N/A	PK
	@	5320	74.9	19.17	94.07	N/A	N/A	AVG
		5351.4	29.68	19.3	48.98	54	-5.02	AVG
		5425.8	41.09	19.77	60.86	74	-13.14	PK

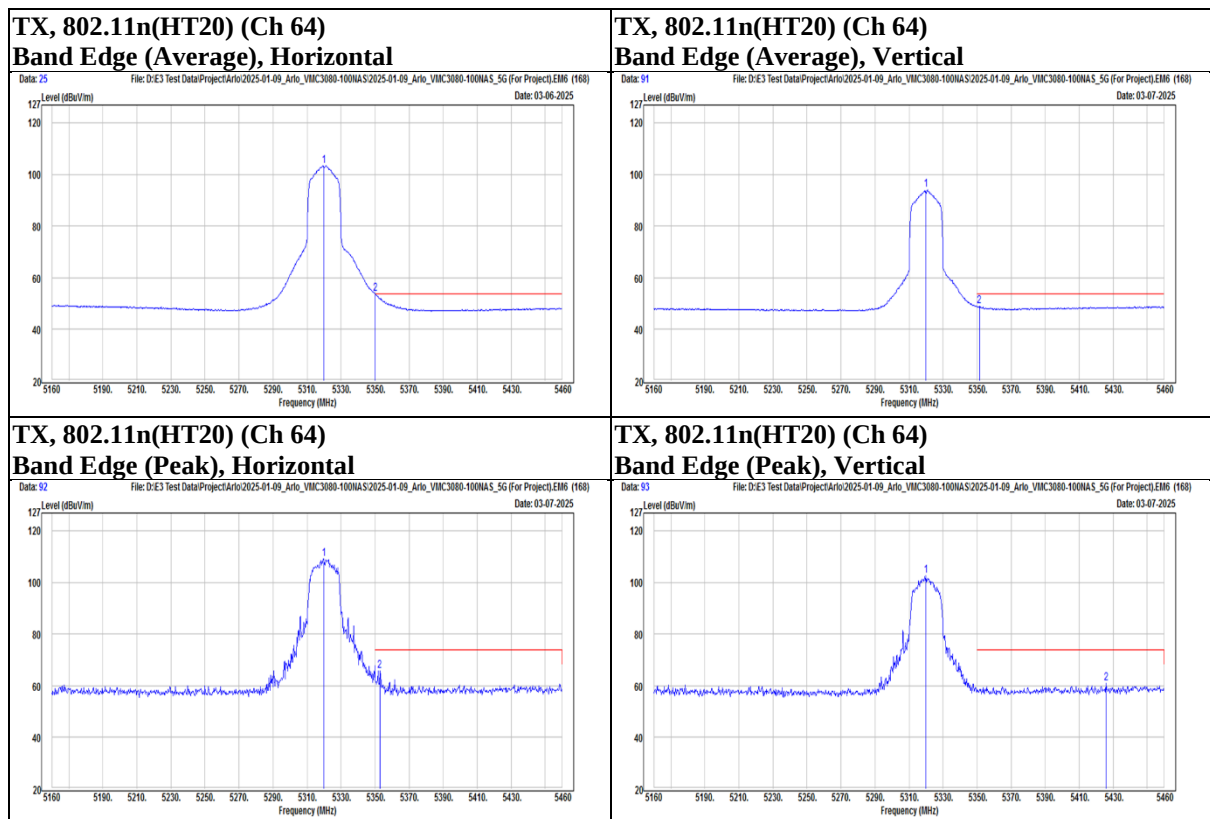

Mode	802.11n(HT20)	Channel	100
------	---------------	---------	-----


Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5459.15	29.22	19.95	49.17	54	-4.83	AVG
		5459.85	40.9	19.95	60.85	74	-13.15	PK
		5469.3	47.57	19.99	67.56	68.2	-0.64	PK
	@	5500	92.96	20.13	113.09	N/A	N/A	PK
	@	5500	84.43	20.13	104.56	N/A	N/A	AVG
Vertical		5456.7	28.85	19.93	48.78	54	-5.22	AVG
		5457.75	41.33	19.94	61.27	74	-12.73	PK
		5464.4	40.88	19.97	60.85	68.2	-7.35	PK
	@	5500	84.32	20.13	104.45	N/A	N/A	PK
	@	5500	76.6	20.13	96.73	N/A	N/A	AVG

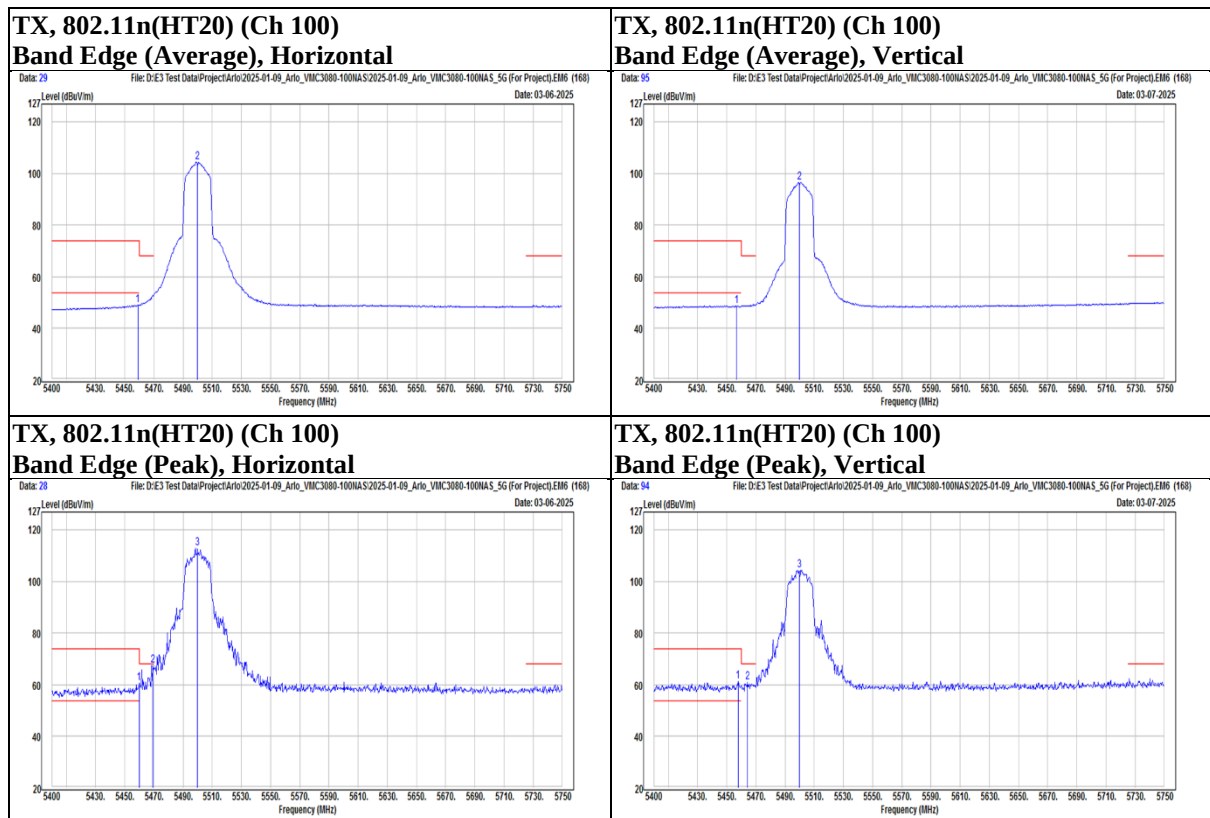


Mode	802.11n(HT20)	Channel	116
------	---------------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5431.85	40.8	19.81	60.61	74	-13.39	PK
		5454.6	28.94	19.92	48.86	54	-5.14	AVG
		5469.3	40.94	19.99	60.93	68.2	-7.27	PK
	@	5580	97.26	20.08	117.34	N/A	N/A	PK
	@	5580	87.56	20.08	107.64	N/A	N/A	AVG
		5725.5	42.86	20.2	63.06	68.2	-5.14	PK
Vertical		5448.3	28.87	19.89	48.76	54	-5.24	AVG
		5452.85	41.01	19.92	60.93	74	-13.07	PK
		5463.7	40.47	19.97	60.44	68.2	-7.76	PK
	@	5580	90.82	20.08	110.9	N/A	N/A	PK
	@	5580	82.77	20.08	102.85	N/A	N/A	AVG
		5734.25	41.82	20.28	62.1	68.2	-6.1	PK


TX, 802.11n(HT20) (Ch 116)
Band Edge (Average), Horizontal

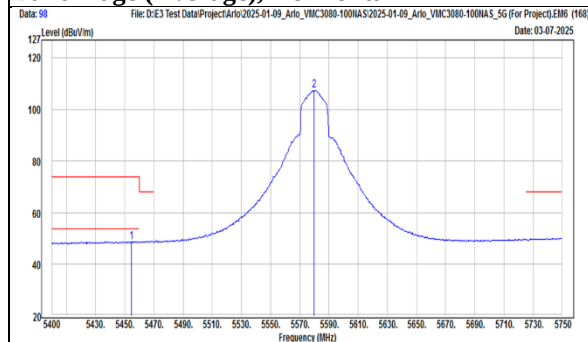


TX, 802.11n(HT20) (Ch 116)
Band Edge (Average), Vertical

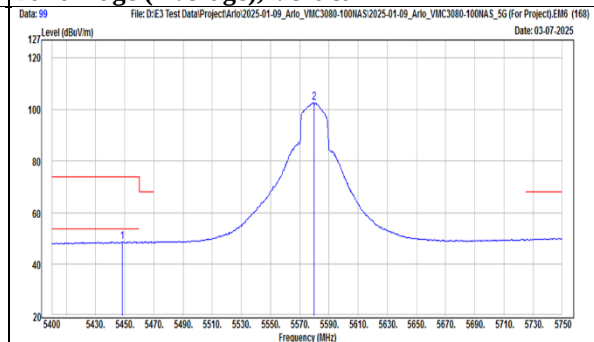

TX, 802.11n(HT20) (Ch 116)
Band Edge (Peak), Horizontal

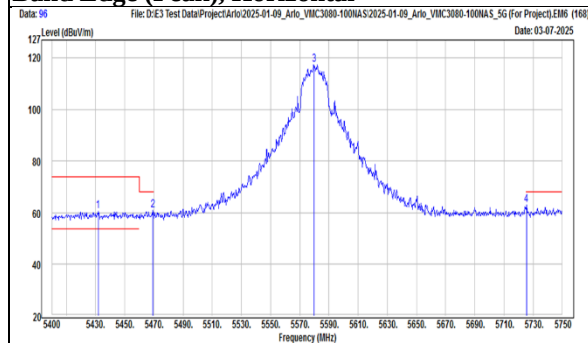


TX, 802.11n(HT20) (Ch 116)
Band Edge (Peak), Vertical

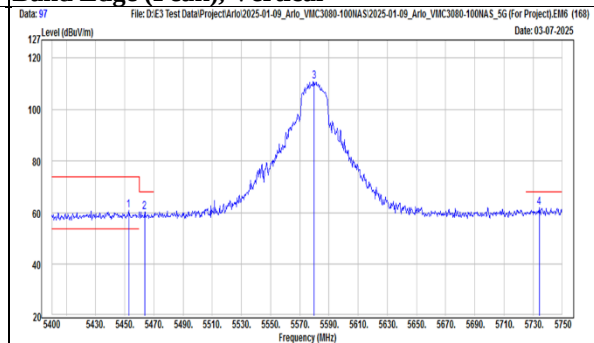


Mode	802.11n(HT20)	Channel	140
------	---------------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5427.65	29	19.78	48.78	54	-5.22	AVG
		5444.45	39.59	19.87	59.46	74	-14.54	PK
		5467.9	38.92	19.99	58.91	68.2	-9.29	PK
	@	5700	92.88	19.96	112.84	N/A	N/A	PK
	@	5700	82.58	19.96	102.54	N/A	N/A	AVG
		5725.5	47.84	20.2	68.04	68.2	-0.16	PK
Vertical		5449.7	41.32	19.9	61.22	74	-12.78	PK
		5452.15	28.97	19.91	48.88	54	-5.12	AVG
		5468.25	40.26	19.99	60.25	68.2	-7.95	PK
	@	5700	86.18	19.96	106.14	N/A	N/A	PK
	@	5700	78.16	19.96	98.12	N/A	N/A	AVG
		5726.2	45.77	20.21	65.98	68.2	-2.22	PK


TX, 802.11n(HT20) (Ch 140)
Band Edge (Average), Horizontal

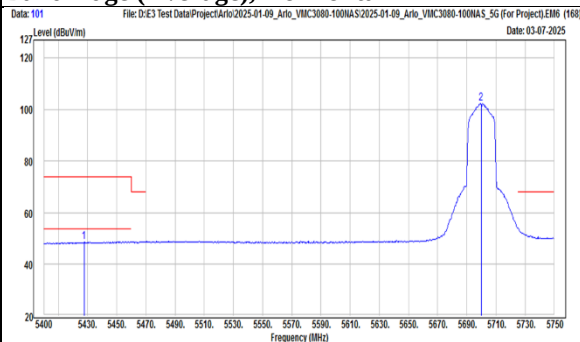


TX, 802.11n(HT20) (Ch 140)
Band Edge (Average), Vertical

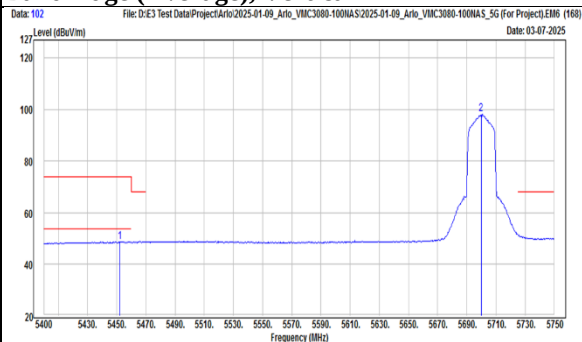

TX, 802.11n(HT20) (Ch 140)
Band Edge (Peak), Horizontal

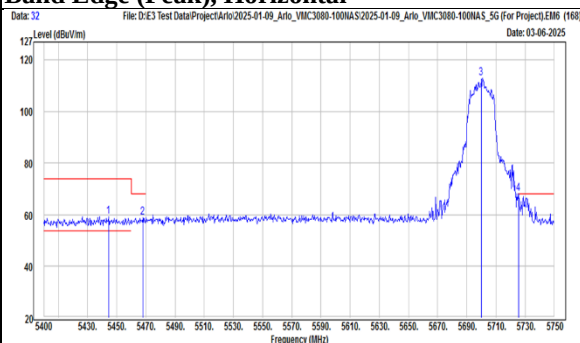


TX, 802.11n(HT20) (Ch 140)
Band Edge (Peak), Vertical

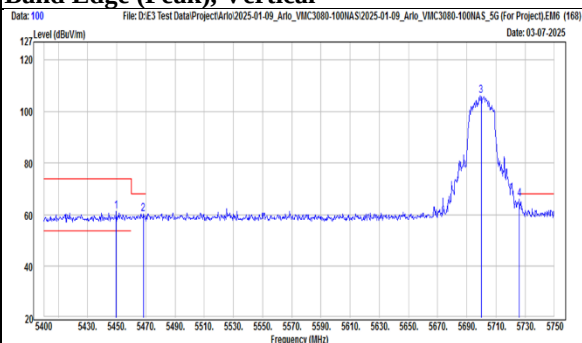


Mode	802.11n(HT20)	Channel	149
------	---------------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5591	40.9	20.1	61	68.2	-7.2	PK
		5699	51.32	19.96	71.28	104.46	-33.18	PK
	@	5745	97.78	20.39	118.17	N/A	N/A	PK
Vertical		5600.5	40.67	20.12	60.79	68.2	-7.41	PK
		5688.5	44.77	19.98	64.75	96.72	-31.97	PK
	@	5745	90.6	20.39	110.99	N/A	N/A	PK

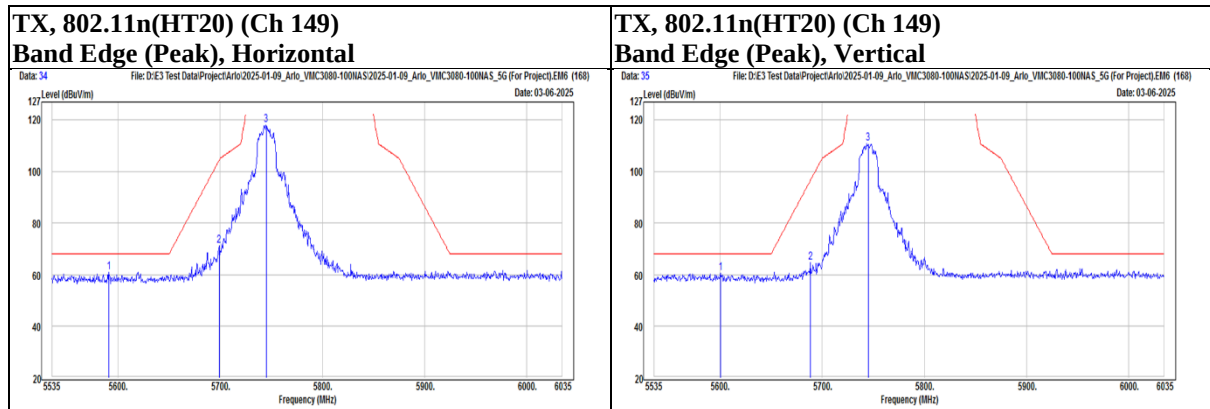

Mode	802.11n(HT20)	Channel	157
------	---------------	---------	-----


Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5565.5	40.39	20.07	60.46	68.2	-7.74	PK
		5669.5	40.23	20.01	60.24	82.67	-22.43	PK
		5785	97.05	20.83	117.88	N/A	N/A	PK
		5921.5	41.86	21.24	63.1	70.78	-7.68	PK
		5980.5	41.04	21.31	62.35	68.2	-5.85	PK
Vertical	@	5595	41.01	20.11	61.12	68.2	-7.08	PK
		5699	40.56	19.96	60.52	104.46	-43.94	PK
		5785	91.96	20.83	112.79	N/A	N/A	PK
		5887.5	40.76	21.27	62.03	95.92	-33.89	PK
		6014.5	40.58	21.39	61.97	68.2	-6.23	PK

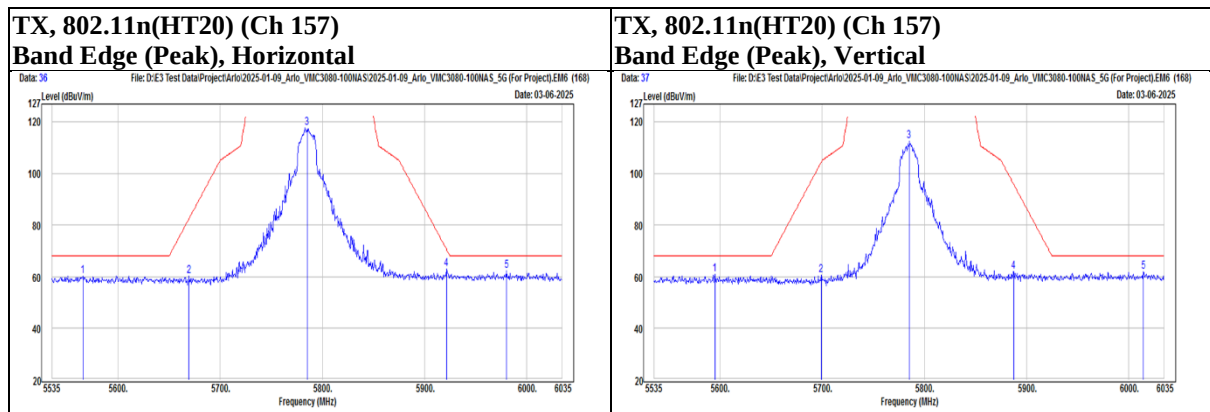


Mode	802.11n(HT20)	Channel	165
------	---------------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5825	97.03	21.12	118.15	N/A	N/A	PK
		5877	52.36	21.26	73.62	103.71	-30.09	PK
		5930.5	41.08	21.23	62.31	68.2	-5.89	PK
Vertical	@	5825	92.19	21.12	113.31	N/A	N/A	PK
		5876.5	45.06	21.26	66.32	104.09	-37.77	PK
		5926	40.48	21.25	61.73	68.2	-6.47	PK

TX, 802.11n(HT20) (Ch 165)
Band Edge (Peak), Horizontal

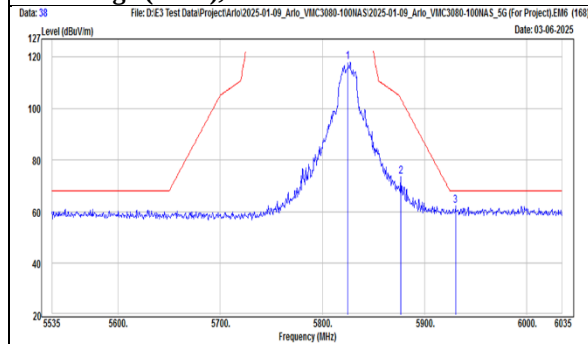


TX, 802.11n(HT20) (Ch 165)
Band Edge (Peak), Vertical

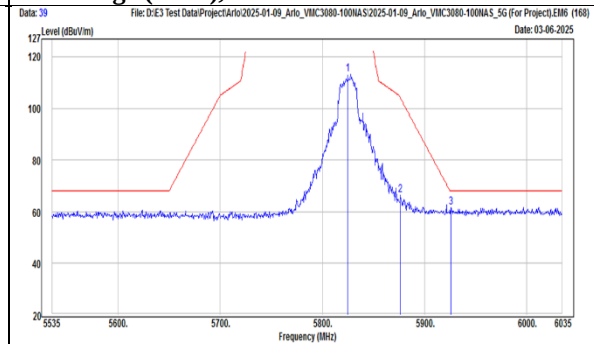

Below 1 GHz

Mode	802.11a	Channel	52
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		80.44	40.01	-16.13	23.88	40	-16.12	PK
		148.34	38.7	-11.96	26.74	43.5	-16.76	PK
		166.77	42.27	-11.68	30.59	43.5	-12.91	PK
		205.57	46.18	-14.7	31.48	43.5	-12.02	PK
		240.49	51.27	-12.62	38.65	46	-7.35	PK
		513.06	37.77	-4.61	33.16	46	-12.84	PK
Vertical		68.8	42.72	-13.28	29.44	40	-10.56	PK
		152.22	41.63	-11.64	29.99	43.5	-13.51	PK
		202.66	42.94	-14.68	28.26	43.5	-15.24	PK
		240.49	40.74	-12.62	28.12	46	-17.88	PK
		296.75	37.59	-10.5	27.09	46	-18.91	PK
		515.97	40.64	-4.51	36.13	46	-9.87	PK

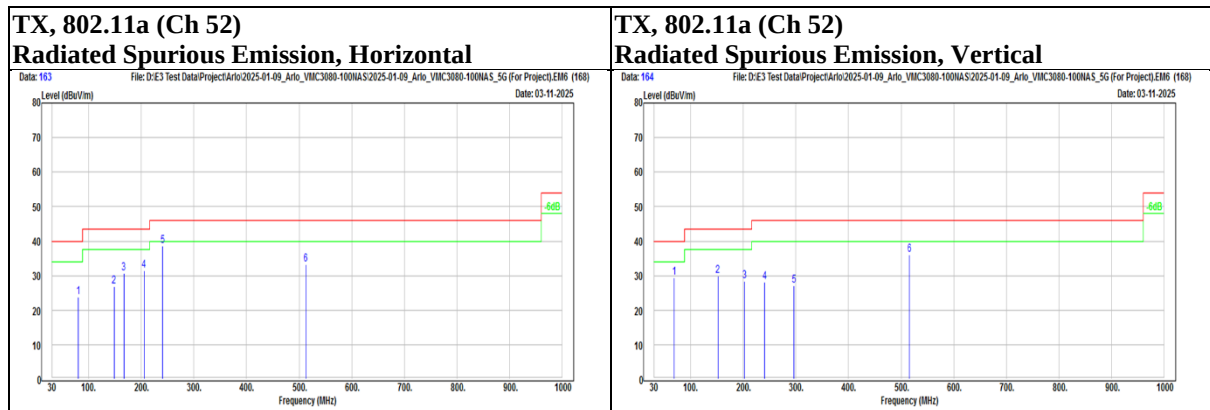

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

9 kHz ~ 30 MHz Data:

For 9 kHz to 30 MHz radiated emission have performed all modes of operation were investigated. The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

No non-compliance noted:

KDB 414788 D01 OATS and Chamber Correlation Justification

- Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

- OATs and chamber correlation testing had been performed and chamber measured test results is the worst case test result.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

9.8. AC Power Line Conducted Emission

Requirements

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
3. Test data of Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB).
4. Test data of Margin(dB) = Result value (dBuV) - Limit value (dBuV).
5. Test data of Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

Test Setup

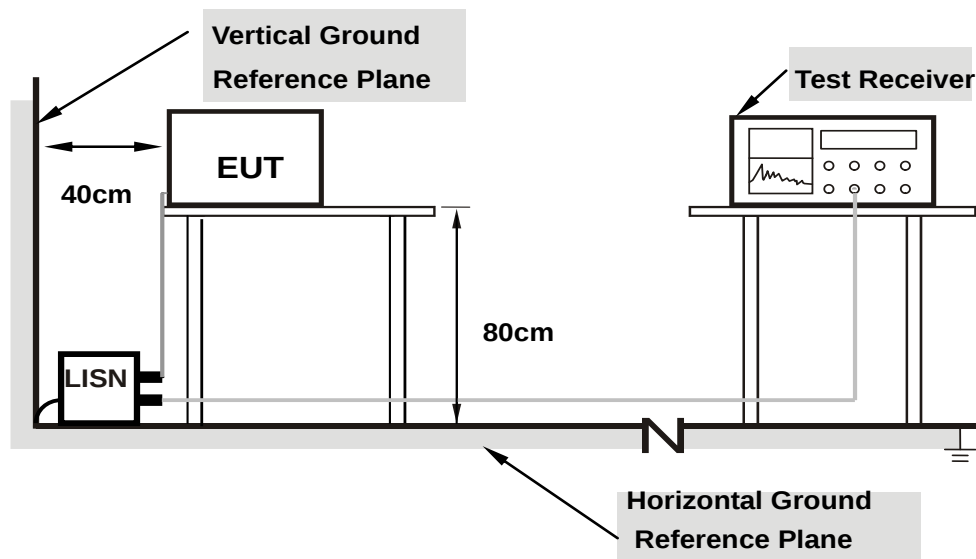


Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the Setup Configurations.

Test Data

Mode	A_TX5785	Channel	157
------	----------	---------	-----

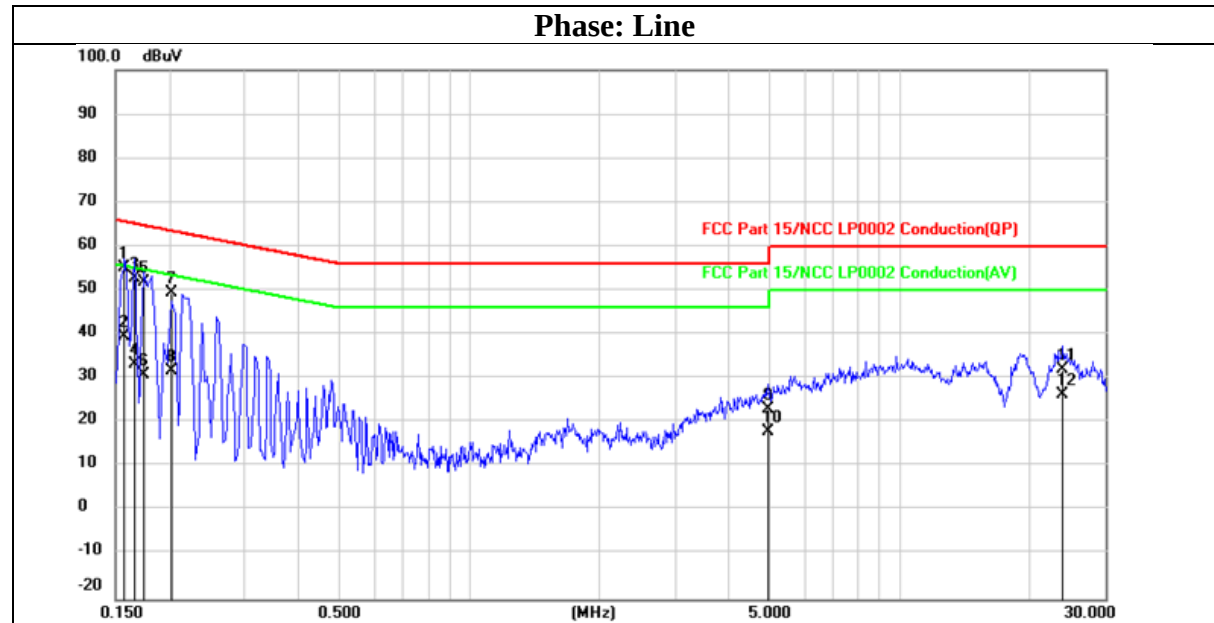

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	45.24	9.96	55.20	65.57	-10.37	QP
2	0.1580	29.45	9.96	39.41	55.57	-16.16	AVG
3	0.1660	42.64	9.96	52.60	65.16	-12.56	QP
4	0.1660	23.40	9.96	33.36	55.16	-21.80	AVG
5	0.1740	42.04	9.96	52.00	64.77	-12.77	QP
6	0.1740	20.83	9.96	30.79	54.77	-23.98	AVG
7	0.2020	39.51	9.96	49.47	63.53	-14.06	QP
8	0.2020	21.74	9.96	31.70	53.53	-21.83	AVG
9	4.9260	13.02	10.12	23.14	56.00	-32.86	QP
10	4.9260	7.88	10.12	18.00	46.00	-28.00	AVG
11	24.0100	21.50	10.64	32.14	60.00	-27.86	QP
12	24.0100	15.59	10.64	26.23	50.00	-23.77	AVG

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

Mode	A_TX5785	Channel	157
------	----------	---------	-----

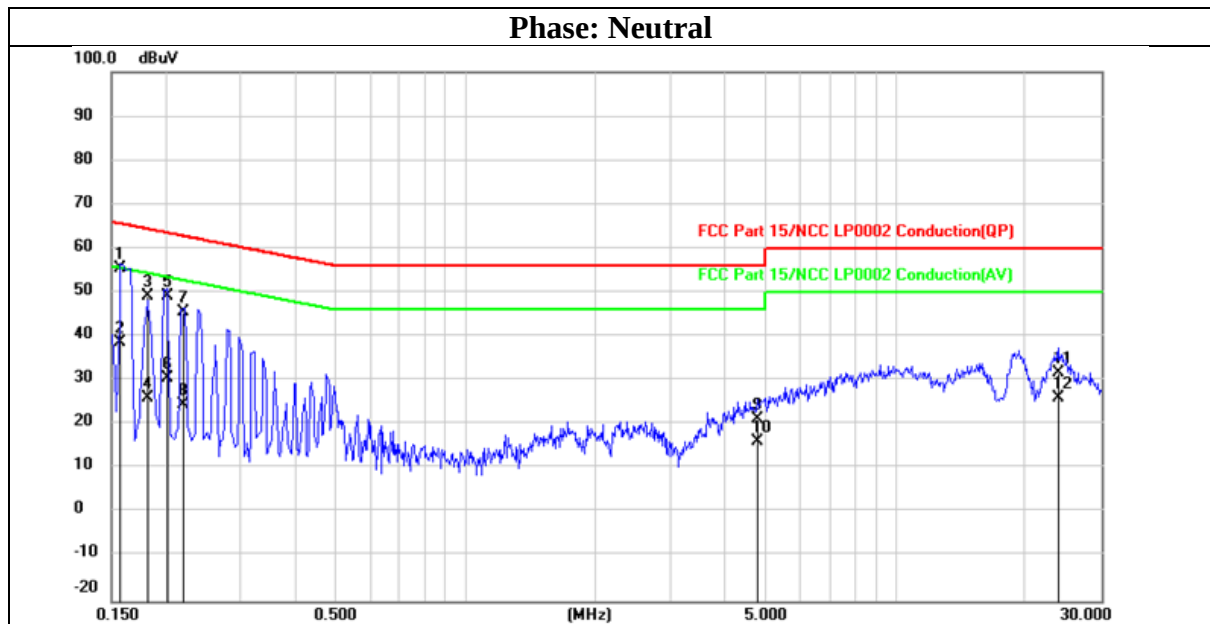

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	45.50	9.94	55.44	65.57	-10.13	QP
2	0.1580	28.77	9.94	38.71	55.57	-16.86	AVG
3	0.1819	39.34	9.94	49.28	64.40	-15.12	QP
4	0.1819	16.11	9.94	26.05	54.40	-28.35	AVG
5	0.2020	39.16	9.94	49.10	63.53	-14.43	QP
6	0.2020	20.62	9.94	30.56	53.53	-22.97	AVG
7	0.2220	35.49	9.94	45.43	62.74	-17.31	QP
8	0.2220	14.47	9.94	24.41	52.74	-28.33	AVG
9	4.7900	11.18	10.08	21.26	56.00	-34.74	QP
10	4.7900	6.09	10.08	16.17	46.00	-29.83	AVG
11	23.8420	21.17	10.61	31.78	60.00	-28.22	QP
12	23.8420	15.32	10.61	25.93	50.00	-24.07	AVG

END OF REPORT

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1