

PRODUCT SPECIFICATION

CUSTOMER: DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

CUST P/N: 3.2.1.1.064.0034

K C P/N:J30-000184-001

D E S E :_20.5*39*0.08*80P*11TS*18MM

D A T E :2024.6.11

VERSION :A.1


ACCEPTANCE STAMP

PREPARED BY	MERCHANDISER	ENGINEER CHECKED BY	APPROVED BY
严慧琳			

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

[illegible]

OVERALL DIMENSIONS OF PRODUCTS:

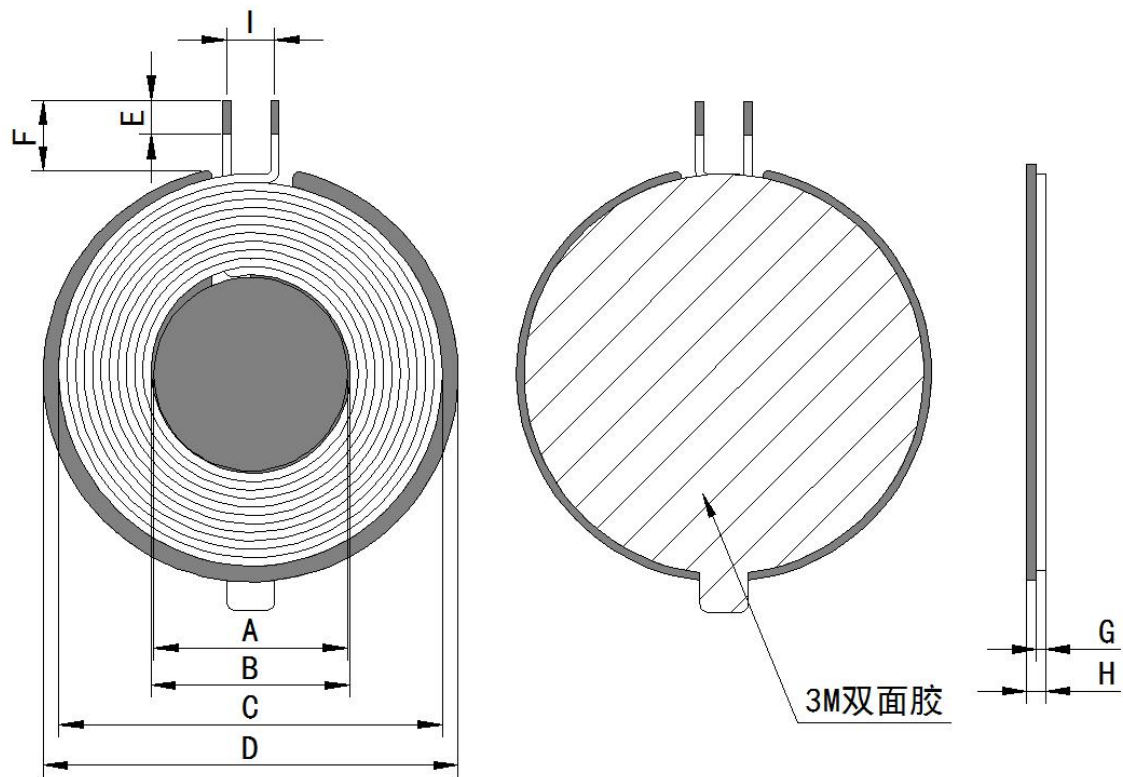

Unit: mm

A	B	C	D	E	F	G	H	I
20±0.5	20.5±0.5	39±1	42.9±0.5	3±1	18±1	1.1±0.1	2.5MAX	5±1.5

Turns	Wire Dia.	Wdg. Type Spred/Close	Wdg.Direction	Intersect Yes/Not	Coil Positive/Anti Paste
11TS	Stranded wire	Close	Anticlockwise	Yes	Anti/Paste

1. ELECTRICAL CHARACTERISTICS:

TEMPERATURE:25±10℃, RELATIVE HUMIDITY:65±10%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
1	IND	S-F	Coil with magnetic sheet: 8.1uH±5%	1kHz/1V	LCZ METER 1062

Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

FilNo: KC-JZ-09-008

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

2	DCR	S-F	91m Ω MAX	1kHz/1V	LCZ METER 1062
---	-----	-----	------------------	---------	----------------

2. BILL OF MATERIAIS:

NO.	Material name	Description	Material Code	Vendor code
1	wire	0.08*80P Hot air braided wire	JX-2U-F-0025	CX
2	Large magnet plate	$642.9 \pm 0.5 * 5.2 \pm 0.5 * 1.0 \pm 0.05H$	GCP-T-00292	KL
3	small magnetic chip	20*1.0H	GCP-T-00264	LX
4	Double-sided tape	40*0.15H	SMJ-3M-00112	HWD
5	Double-sided tape	18*0.08H	SMJ-T-0010	HWD
6	glue	JS-E7202	E7202W	HZY
7	tin bar	Environmentally friendly lead-free solder bar	/	XC

Tel: 86-076986018114 Fax: 86-076986015646

[Http://www.jzcoil.com](http://www.jzcoil.com)

FilNo: KC-JZ-09-008