



RF TEST REPORT

Applicant Huawei Device Co.,Ltd.
FCC ID 2ATEYPPA-LX3
Product Smart Phone
Model PPA-LX3
Report No. R2101A0041-R2
Issue Date January 8, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 24E (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report	4
1.2. Testing Location	4
2. General Description of Equipment under Test	5
2.1. Applicant and Manufacturer Information	5
2.2. General information	5
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	11
5.1. RF Power Output and Effective Radiated Power	11
5.2. Occupied Bandwidth	22
5.3. Band Edge Compliance	33
5.4. Peak-to-Average Power Ratio (PAPR)	44
5.5. Frequency Stability	47
5.6. Spurious Emissions at Antenna Terminals	53
5.7. Radiates Spurious Emission	60
6. Main Test Instruments	69

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Isotropic Radiated Power	2.1046 24.232(c)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 /24.238(a)	PASS
4	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 24.235	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
7	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: September 9, 2020 ~ September 17, 2020			
Date of Sample Receiving: September 7, 2020			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

This report is only added FCC ID, there is no test in this report and the original report number is R2009H0244-R2.

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.3. Applicant and Manufacturer Information

Applicant	Huawei Device Co.,Ltd.
Applicant address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China
Manufacturer	Huawei Device Co.,Ltd.
Manufacturer address	No.2 of Xincheng Road, Songshan Lake Zone, Dongguan, Guangdong 523808, People's Republic of China

2.4. General information

EUT Description			
Model	PPA-LX3		
SN:	2KTNU20811100368		
Hardware Version	HL1PPAM		
Software Version	10.1.1.100(C900E25R1P2)		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	Band	Main Antenna(dBi)	Second Antenna(dBi)
	GSM 1900:	-1.4	-4.6
	WCDMA Band II	-1.4	-4.6
	LTE Band 2	-1.4	-4.6
Test Mode(s)	GSM1900; WCDMA Band II; LTE Band 2;		
Test Modulation	(GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (WCDMA) BPSK, QPSK; (LTE)QPSK,16QAM.		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
LTE Category	4		
Maximum E.I.R.P	GSM 1900:	29.18dBm	
	WCDMA Band II:	22.85dBm	
	LTE Band 2:	25.67dBm	
Rated Power Supply Voltage	3.85V		
Operating Voltage	Minimum: 3.6V	Maximum: 4.43V	
Operating Temperature	Lowest: 0°C	Highest: +35°C	
Extreme Voltage	Minimum: 3.6V	Maximum: 4.43V	
Extreme Temperature	Lowest: -30°C	Highest: +55°C	



Operating Frequency Range(s)		Band	Tx (MHz)	Rx (MHz)
		GSM1900	1850 ~ 1910	1930 ~ 1990
		WCDMA Band II	1850 ~ 1910	1930 ~ 1990
		LTE Band 2	1850 ~ 1910	1930 ~ 1990
Accessory	Model	Manufacture		No.
Adapter	HW-100225E00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)		1
		Huawei Device Co.,Ltd. (Manufacturer: DONGGUAN PHITEK ELECTRONICS CO.,LTD)		2
		Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd.)		3
	HW-100225U00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)		4
		Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd)		5
	HW-100225A00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)		6
		Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd)		7
	HW-100225B00	Huawei Device Co.,Ltd. (Manufacturer: HUIZHOU BYD ELECTRONIC CO., LTD.)		8
		H Huawei Device Co.,Ltd. (Manufacturer: Shenzhen Huntkey Electric Co., Ltd)		9
Battery	HB526488EEW	Huawei Device Co.,Ltd. (Manufacturer: Dongguan NVT Technology Co., Ltd)		1
		Huawei Device Co.,Ltd. (Manufacturer: Huizhou Desay Battery Co., Ltd.)		2
		Huawei Device Co.,Ltd. (Manufacturer: Sunwoda Electronic Co., Ltd.)		3
USB Cable	WA0020	NingBo Broad Telecommunication Co.,Ltd.		1
	L99UC131-CS-H	LUXSHARE Precision Industry Co., Ltd.		2
	CUDU01B-HC2 95-EH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED		3
	18-93C2CHO-00 1HF	Freeport Resources Enterprises (Jiangxi) Co.,Ltd		4
	203-1572-0	Dongguan Mingji Electronics Technology Group Co.,Ltd		5
Earphone	MEND1532B528	Jiangxi Lianchuang Hongsheng Electronic Co. ,LTD		1



	A11		
	1293-3283-3.5M M-339	Boluo County Quancheng Electronic Co.,ltd	2
	EPAB542-2WH0 5-DH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	3

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.

2. There are more than one Adapter, Battery, Earphone and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter1,Battery2, Earphone2 and USB Cable1) will be recorded in this report.



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 24E (2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 1900	WCDMA Band II
RF Power Output and Effective Isotropic Radiated Power	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC



Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF Power Output and Effective Isotropic Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	-	-	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1.RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement


During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).


- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g.transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$
where:dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test Setup

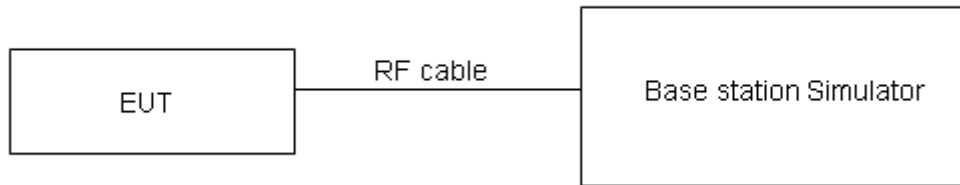

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

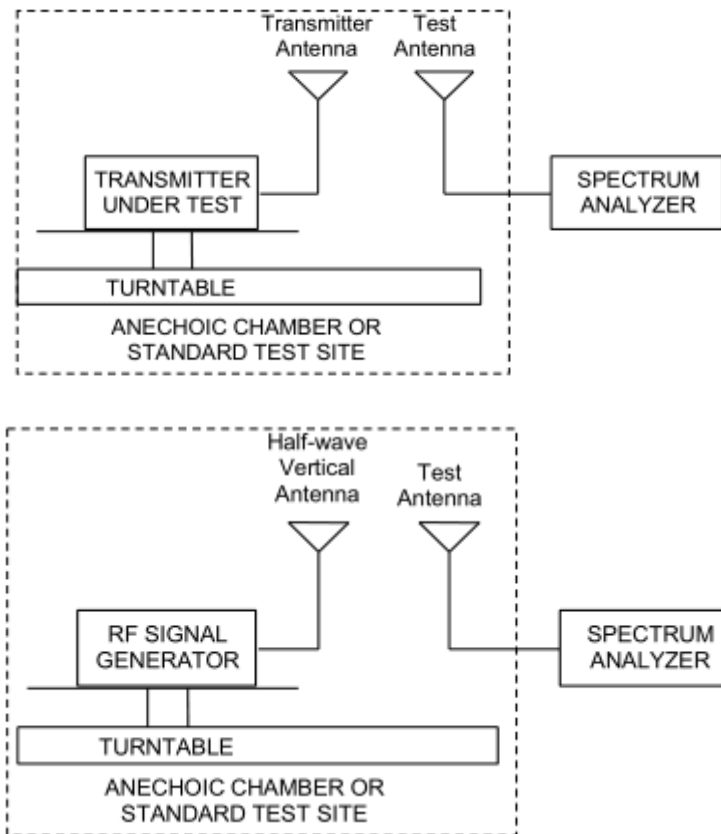

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2 \text{ W}$ (33 dBm)
-------	-----------------------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB for RF power output, $k = 2$, $U = 1.19$ dB for EIRP.



Test Results

GSM 1900		Maximum Output Power (dBm)			EIRP (dBm) Main Antenna			EIRP (dBm) Second Antenna		
		Channel 512	Channel 661	Channel 810	Channel 512	Channel 661	Channel 810	Channel 512	Channel 661	Channel 810
		1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)	1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)	1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)
GSM(GMSK)	Results	30.58	30.14	29.96	29.18	28.74	28.56	25.98	25.54	25.36
GPRS (GMSK)	1TXslot	30.57	30.23	30.31	29.17	28.83	28.91	25.97	25.63	25.71
	2TXslots	27.45	27.04	27.21	26.05	25.64	25.81	22.85	22.44	22.61
	3TXslots	25.41	25.20	25.32	24.01	23.80	23.92	20.81	20.60	20.72
	4TXslots	24.10	24.02	24.00	22.70	22.62	22.60	19.50	19.42	19.40
EGPRS (8PSK)	1TXslot	26.01	26.10	25.98	24.61	24.70	24.58	21.41	21.50	21.38
	2TXslots	22.60	22.74	22.65	21.20	21.34	21.25	18.00	18.14	18.05
	3TXslots	20.61	20.56	20.50	19.21	19.16	19.10	16.01	15.96	15.90
	4TXslots	19.30	19.37	19.22	17.90	17.97	17.82	14.70	14.77	14.62

WCDMA Band II		Maximum Output Power (dBm)			EIRP (dBm) Main Antenna			EIRP (dBm) Second Antenna		
		Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538
		1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)	1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)	1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)
RMC		24.25	24.09	23.81	22.85	22.69	22.41	19.65	19.49	19.21
HSDPA	Sub - Test 1	23.71	23.51	23.25	22.31	22.11	21.85	19.11	18.91	18.65
	Sub - Test 2	23.70	23.53	23.22	22.30	22.13	21.82	19.10	18.93	18.62
	Sub - Test 3	23.17	23.03	22.74	21.77	21.63	21.34	18.57	18.43	18.14
	Sub - Test 4	23.18	23.04	22.72	21.78	21.64	21.32	18.58	18.44	18.12
HSUPA	Sub - Test 1	23.67	23.50	23.20	22.27	22.10	21.80	19.07	18.90	18.60
	Sub - Test 2	22.66	22.48	22.19	21.26	21.08	20.79	18.06	17.88	17.59
	Sub - Test 3	23.13	22.96	22.68	21.73	21.56	21.28	18.53	18.36	18.08
	Sub - Test 4	22.59	22.45	22.16	21.19	21.05	20.76	17.99	17.85	17.56
	Sub - Test 5	23.60	23.43	23.14	22.20	22.03	21.74	19.00	18.83	18.54
DC-HSDPA	Sub - Test 1	23.59	23.45	23.15	22.19	22.05	21.75	18.99	18.85	18.55
	Sub - Test 2	23.58	23.44	23.14	22.18	22.04	21.74	18.98	18.84	18.54
	Sub - Test 3	23.16	22.93	22.65	21.76	21.53	21.25	18.56	18.33	18.05
	Sub - Test 4	23.15	22.92	22.64	21.75	21.52	21.24	18.55	18.32	18.04



Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)	EIRP(dBm) Main Antenna	EIRP (dBm) Second Antenna	Verdict
LTE Band2	1.4	18607	1	#0	QPSK	24.03	22.63	19.43	PASS
LTE Band2	1.4	18607	1	#Mid	QPSK	23.72	22.32	19.12	PASS
LTE Band2	1.4	18607	1	#Max	QPSK	23.96	22.56	19.36	PASS
LTE Band2	1.4	18607	3	#0	QPSK	24.01	22.61	19.41	PASS
LTE Band2	1.4	18607	3	#Mid	QPSK	23.93	22.53	19.33	PASS
LTE Band2	1.4	18607	3	#Max	QPSK	23.88	22.48	19.28	PASS
LTE Band2	1.4	18607	6	#0	QPSK	22.85	21.45	18.25	PASS
LTE Band2	1.4	18607	1	#0	QAM16	22.89	21.49	18.29	PASS
LTE Band2	1.4	18607	1	#Mid	QAM16	22.67	21.27	18.07	PASS
LTE Band2	1.4	18607	1	#Max	QAM16	22.88	21.48	18.28	PASS
LTE Band2	1.4	18607	3	#0	QAM16	22.92	21.52	18.32	PASS
LTE Band2	1.4	18607	3	#Mid	QAM16	22.91	21.51	18.31	PASS
LTE Band2	1.4	18607	3	#Max	QAM16	22.97	21.57	18.37	PASS
LTE Band2	1.4	18607	6	#0	QAM16	21.74	20.34	17.14	PASS
LTE Band2	1.4	18900	1	#0	QPSK	23.86	22.46	19.26	PASS
LTE Band2	1.4	18900	1	#Mid	QPSK	23.37	21.97	18.77	PASS
LTE Band2	1.4	18900	1	#Max	QPSK	23.83	22.43	19.23	PASS
LTE Band2	1.4	18900	3	#0	QPSK	23.71	22.31	19.11	PASS
LTE Band2	1.4	18900	3	#Mid	QPSK	23.7	22.30	19.10	PASS
LTE Band2	1.4	18900	3	#Max	QPSK	23.82	22.42	19.22	PASS
LTE Band2	1.4	18900	6	#0	QPSK	22.77	21.37	18.17	PASS
LTE Band2	1.4	18900	1	#0	QAM16	22.91	21.51	18.31	PASS
LTE Band2	1.4	18900	1	#Mid	QAM16	22.55	21.15	17.95	PASS
LTE Band2	1.4	18900	1	#Max	QAM16	22.94	21.54	18.34	PASS
LTE Band2	1.4	18900	3	#0	QAM16	22.68	21.28	18.08	PASS
LTE Band2	1.4	18900	3	#Mid	QAM16	22.72	21.32	18.12	PASS
LTE Band2	1.4	18900	3	#Max	QAM16	22.76	21.36	18.16	PASS
LTE Band2	1.4	18900	6	#0	QAM16	21.54	20.14	16.94	PASS
LTE Band2	1.4	19193	1	#0	QPSK	23.83	22.43	19.23	PASS
LTE Band2	1.4	19193	1	#Mid	QPSK	23.61	22.21	19.01	PASS
LTE Band2	1.4	19193	1	#Max	QPSK	23.71	22.31	19.11	PASS
LTE Band2	1.4	19193	3	#0	QPSK	23.5	22.10	18.90	PASS
LTE Band2	1.4	19193	3	#Mid	QPSK	23.47	22.07	18.87	PASS
LTE Band2	1.4	19193	3	#Max	QPSK	23.47	22.07	18.87	PASS
LTE Band2	1.4	19193	6	#0	QPSK	22.39	20.99	17.79	PASS
LTE Band2	1.4	19193	1	#0	QAM16	22.53	21.13	17.93	PASS
LTE Band2	1.4	19193	1	#Mid	QAM16	22.44	21.04	17.84	PASS
LTE Band2	1.4	19193	1	#Max	QAM16	22.69	21.29	18.09	PASS



LTE Band2	1.4	19193	3	#0	QAM16	22.53	21.13	17.93	PASS
LTE Band2	1.4	19193	3	#Mid	QAM16	22.65	21.25	18.05	PASS
LTE Band2	1.4	19193	3	#Max	QAM16	22.5	21.10	17.90	PASS
LTE Band2	1.4	19193	6	#0	QAM16	21.45	20.05	16.85	PASS
LTE Band2	3	18615	1	#0	QPSK	23.96	22.56	19.36	PASS
LTE Band2	3	18615	1	#Mid	QPSK	23.92	22.52	19.32	PASS
LTE Band2	3	18615	1	#Max	QPSK	23.87	22.47	19.27	PASS
LTE Band2	3	18615	8	#0	QPSK	22.94	21.54	18.34	PASS
LTE Band2	3	18615	8	#Mid	QPSK	22.95	21.55	18.35	PASS
LTE Band2	3	18615	8	#Max	QPSK	22.87	21.47	18.27	PASS
LTE Band2	3	18615	15	#0	QPSK	22.86	21.46	18.26	PASS
LTE Band2	3	18615	1	#0	QAM16	23.26	21.86	18.66	PASS
LTE Band2	3	18615	1	#Mid	QAM16	23	21.60	18.40	PASS
LTE Band2	3	18615	1	#Max	QAM16	23.23	21.83	18.63	PASS
LTE Band2	3	18615	8	#0	QAM16	21.81	20.41	17.21	PASS
LTE Band2	3	18615	8	#Mid	QAM16	21.82	20.42	17.22	PASS
LTE Band2	3	18615	8	#Max	QAM16	21.77	20.37	17.17	PASS
LTE Band2	3	18615	15	#0	QAM16	21.82	20.42	17.22	PASS
LTE Band2	3	18900	1	#0	QPSK	23.76	22.36	19.16	PASS
LTE Band2	3	18900	1	#Mid	QPSK	23.82	22.42	19.22	PASS
LTE Band2	3	18900	1	#Max	QPSK	23.82	22.42	19.22	PASS
LTE Band2	3	18900	8	#0	QPSK	22.79	21.39	18.19	PASS
LTE Band2	3	18900	8	#Mid	QPSK	22.78	21.38	18.18	PASS
LTE Band2	3	18900	8	#Max	QPSK	22.8	21.40	18.20	PASS
LTE Band2	3	18900	15	#0	QPSK	22.78	21.38	18.18	PASS
LTE Band2	3	18900	1	#0	QAM16	22.82	21.42	18.22	PASS
LTE Band2	3	18900	1	#Mid	QAM16	22.78	21.38	18.18	PASS
LTE Band2	3	18900	1	#Max	QAM16	22.82	21.42	18.22	PASS
LTE Band2	3	18900	8	#0	QAM16	21.79	20.39	17.19	PASS
LTE Band2	3	18900	8	#Mid	QAM16	21.81	20.41	17.21	PASS
LTE Band2	3	18900	8	#Max	QAM16	21.83	20.43	17.23	PASS
LTE Band2	3	18900	15	#0	QAM16	21.75	20.35	17.15	PASS
LTE Band2	3	19185	1	#0	QPSK	23.66	22.26	19.06	PASS
LTE Band2	3	19185	1	#Mid	QPSK	23.59	22.19	18.99	PASS
LTE Band2	3	19185	1	#Max	QPSK	23.58	22.18	18.98	PASS
LTE Band2	3	19185	8	#0	QPSK	22.55	21.15	17.95	PASS
LTE Band2	3	19185	8	#Mid	QPSK	22.66	21.26	18.06	PASS
LTE Band2	3	19185	8	#Max	QPSK	22.48	21.08	17.88	PASS
LTE Band2	3	19185	15	#0	QPSK	22.59	21.19	17.99	PASS
LTE Band2	3	19185	1	#0	QAM16	22.66	21.26	18.06	PASS
LTE Band2	3	19185	1	#Mid	QAM16	22.62	21.22	18.02	PASS
LTE Band2	3	19185	1	#Max	QAM16	22.61	21.21	18.01	PASS



LTE Band2	3	19185	8	#0	QAM16	21.55	20.15	16.95	PASS
LTE Band2	3	19185	8	#Mid	QAM16	21.59	20.19	16.99	PASS
LTE Band2	3	19185	8	#Max	QAM16	21.52	20.12	16.92	PASS
LTE Band2	3	19185	15	#0	QAM16	21.53	20.13	16.93	PASS
LTE Band2	5	18625	1	#0	QPSK	23.97	22.57	19.37	PASS
LTE Band2	5	18625	1	#Mid	QPSK	23.9	22.50	19.30	PASS
LTE Band2	5	18625	1	#Max	QPSK	23.91	22.51	19.31	PASS
LTE Band2	5	18625	12	#0	QPSK	22.96	21.56	18.36	PASS
LTE Band2	5	18625	12	#Mid	QPSK	22.94	21.54	18.34	PASS
LTE Band2	5	18625	12	#Max	QPSK	22.96	21.56	18.36	PASS
LTE Band2	5	18625	25	#0	QPSK	22.85	21.45	18.25	PASS
LTE Band2	5	18625	1	#0	QAM16	22.94	21.54	18.34	PASS
LTE Band2	5	18625	1	#Mid	QAM16	22.92	21.52	18.32	PASS
LTE Band2	5	18625	1	#Max	QAM16	22.9	21.50	18.30	PASS
LTE Band2	5	18625	12	#0	QAM16	21.9	20.50	17.30	PASS
LTE Band2	5	18625	12	#Mid	QAM16	21.91	20.51	17.31	PASS
LTE Band2	5	18625	12	#Max	QAM16	21.87	20.47	17.27	PASS
LTE Band2	5	18625	25	#0	QAM16	21.85	20.45	17.25	PASS
LTE Band2	5	18900	1	#0	QPSK	23.82	22.42	19.22	PASS
LTE Band2	5	18900	1	#Mid	QPSK	23.83	22.43	19.23	PASS
LTE Band2	5	18900	1	#Max	QPSK	23.83	22.43	19.23	PASS
LTE Band2	5	18900	12	#0	QPSK	22.85	21.45	18.25	PASS
LTE Band2	5	18900	12	#Mid	QPSK	22.84	21.44	18.24	PASS
LTE Band2	5	18900	12	#Max	QPSK	22.84	21.44	18.24	PASS
LTE Band2	5	18900	25	#0	QPSK	22.77	21.37	18.17	PASS
LTE Band2	5	18900	1	#0	QAM16	22.9	21.50	18.30	PASS
LTE Band2	5	18900	1	#Mid	QAM16	22.92	21.52	18.32	PASS
LTE Band2	5	18900	1	#Max	QAM16	22.98	21.58	18.38	PASS
LTE Band2	5	18900	12	#0	QAM16	21.76	20.36	17.16	PASS
LTE Band2	5	18900	12	#Mid	QAM16	21.74	20.34	17.14	PASS
LTE Band2	5	18900	12	#Max	QAM16	21.74	20.34	17.14	PASS
LTE Band2	5	18900	25	#0	QAM16	21.67	20.27	17.07	PASS
LTE Band2	5	19175	1	#0	QPSK	23.67	22.27	19.07	PASS
LTE Band2	5	19175	1	#Mid	QPSK	23.6	22.20	19.00	PASS
LTE Band2	5	19175	1	#Max	QPSK	23.51	22.11	18.91	PASS
LTE Band2	5	19175	12	#0	QPSK	22.66	21.26	18.06	PASS
LTE Band2	5	19175	12	#Mid	QPSK	22.64	21.24	18.04	PASS
LTE Band2	5	19175	12	#Max	QPSK	22.57	21.17	17.97	PASS
LTE Band2	5	19175	25	#0	QPSK	22.63	21.23	18.03	PASS
LTE Band2	5	19175	1	#0	QAM16	22.88	21.48	18.28	PASS
LTE Band2	5	19175	1	#Mid	QAM16	22.76	21.36	18.16	PASS
LTE Band2	5	19175	1	#Max	QAM16	22.71	21.31	18.11	PASS



LTE Band2	5	19175	12	#0	QAM16	21.68	20.28	17.08	PASS
LTE Band2	5	19175	12	#Mid	QAM16	21.73	20.33	17.13	PASS
LTE Band2	5	19175	12	#Max	QAM16	21.62	20.22	17.02	PASS
LTE Band2	5	19175	25	#0	QAM16	21.55	20.15	16.95	PASS
LTE Band2	10	18650	1	#0	QPSK	23.93	22.53	19.33	PASS
LTE Band2	10	18650	1	#Mid	QPSK	23.52	22.12	18.92	PASS
LTE Band2	10	18650	1	#Max	QPSK	23.75	22.35	19.15	PASS
LTE Band2	10	18650	25	#0	QPSK	22.96	21.56	18.36	PASS
LTE Band2	10	18650	25	#Mid	QPSK	22.93	21.53	18.33	PASS
LTE Band2	10	18650	25	#Max	QPSK	22.89	21.49	18.29	PASS
LTE Band2	10	18650	50	#0	QPSK	22.85	21.45	18.25	PASS
LTE Band2	10	18650	1	#0	QAM16	23.07	21.67	18.47	PASS
LTE Band2	10	18650	1	#Mid	QAM16	22.56	21.16	17.96	PASS
LTE Band2	10	18650	1	#Max	QAM16	22.89	21.49	18.29	PASS
LTE Band2	10	18650	25	#0	QAM16	21.92	20.52	17.32	PASS
LTE Band2	10	18650	25	#Mid	QAM16	21.9	20.50	17.30	PASS
LTE Band2	10	18650	25	#Max	QAM16	21.77	20.37	17.17	PASS
LTE Band2	10	18650	50	#0	QAM16	21.83	20.43	17.23	PASS
LTE Band2	10	18900	1	#0	QPSK	23.84	22.44	19.24	PASS
LTE Band2	10	18900	1	#Mid	QPSK	23.46	22.06	18.86	PASS
LTE Band2	10	18900	1	#Max	QPSK	23.94	22.54	19.34	PASS
LTE Band2	10	18900	25	#0	QPSK	22.83	21.43	18.23	PASS
LTE Band2	10	18900	25	#Mid	QPSK	22.84	21.44	18.24	PASS
LTE Band2	10	18900	25	#Max	QPSK	22.84	21.44	18.24	PASS
LTE Band2	10	18900	50	#0	QPSK	22.81	21.41	18.21	PASS
LTE Band2	10	18900	1	#0	QAM16	22.75	21.35	18.15	PASS
LTE Band2	10	18900	1	#Mid	QAM16	22.46	21.06	17.86	PASS
LTE Band2	10	18900	1	#Max	QAM16	22.8	21.40	18.20	PASS
LTE Band2	10	18900	25	#0	QAM16	21.82	20.42	17.22	PASS
LTE Band2	10	18900	25	#Mid	QAM16	21.83	20.43	17.23	PASS
LTE Band2	10	18900	25	#Max	QAM16	21.82	20.42	17.22	PASS
LTE Band2	10	18900	50	#0	QAM16	21.72	20.32	17.12	PASS
LTE Band2	10	19150	1	#0	QPSK	23.96	22.56	19.36	PASS
LTE Band2	10	19150	1	#Mid	QPSK	23.36	21.96	18.76	PASS
LTE Band2	10	19150	1	#Max	QPSK	23.62	22.22	19.02	PASS
LTE Band2	10	19150	25	#0	QPSK	22.81	21.41	18.21	PASS
LTE Band2	10	19150	25	#Mid	QPSK	22.82	21.42	18.22	PASS
LTE Band2	10	19150	25	#Max	QPSK	22.66	21.26	18.06	PASS
LTE Band2	10	19150	50	#0	QPSK	22.69	21.29	18.09	PASS
LTE Band2	10	19150	1	#0	QAM16	22.77	21.37	18.17	PASS
LTE Band2	10	19150	1	#Mid	QAM16	22.4	21.00	17.80	PASS
LTE Band2	10	19150	1	#Max	QAM16	22.52	21.12	17.92	PASS



LTE Band2	10	19150	25	#0	QAM16	21.77	20.37	17.17	PASS
LTE Band2	10	19150	25	#Mid	QAM16	21.73	20.33	17.13	PASS
LTE Band2	10	19150	25	#Max	QAM16	21.59	20.19	16.99	PASS
LTE Band2	10	19150	50	#0	QAM16	21.63	20.23	17.03	PASS
LTE Band2	15	18675	1	#0	QPSK	23.95	22.55	19.35	PASS
LTE Band2	15	18675	1	#Mid	QPSK	23.83	22.43	19.23	PASS
LTE Band2	15	18675	1	#Max	QPSK	23.6	22.20	19.00	PASS
LTE Band2	15	18675	36	#0	QPSK	22.94	21.54	18.34	PASS
LTE Band2	15	18675	36	#Mid	QPSK	22.95	21.55	18.35	PASS
LTE Band2	15	18675	36	#Max	QPSK	22.83	21.43	18.23	PASS
LTE Band2	15	18675	75	#0	QPSK	22.87	21.47	18.27	PASS
LTE Band2	15	18675	1	#0	QAM16	23.02	21.62	18.42	PASS
LTE Band2	15	18675	1	#Mid	QAM16	22.89	21.49	18.29	PASS
LTE Band2	15	18675	1	#Max	QAM16	22.72	21.32	18.12	PASS
LTE Band2	15	18675	36	#0	QAM16	21.91	20.51	17.31	PASS
LTE Band2	15	18675	36	#Mid	QAM16	21.91	20.51	17.31	PASS
LTE Band2	15	18675	36	#Max	QAM16	21.7	20.30	17.10	PASS
LTE Band2	15	18675	75	#0	QAM16	21.75	20.35	17.15	PASS
LTE Band2	15	18900	1	#0	QPSK	23.74	22.34	19.14	PASS
LTE Band2	15	18900	1	#Mid	QPSK	23.84	22.44	19.24	PASS
LTE Band2	15	18900	1	#Max	QPSK	23.9	22.50	19.30	PASS
LTE Band2	15	18900	36	#0	QPSK	22.86	21.46	18.26	PASS
LTE Band2	15	18900	36	#Mid	QPSK	22.87	21.47	18.27	PASS
LTE Band2	15	18900	36	#Max	QPSK	22.95	21.55	18.35	PASS
LTE Band2	15	18900	75	#0	QPSK	22.86	21.46	18.26	PASS
LTE Band2	15	18900	1	#0	QAM16	22.6	21.20	18.00	PASS
LTE Band2	15	18900	1	#Mid	QAM16	22.81	21.41	18.21	PASS
LTE Band2	15	18900	1	#Max	QAM16	22.8	21.40	18.20	PASS
LTE Band2	15	18900	36	#0	QAM16	21.8	20.40	17.20	PASS
LTE Band2	15	18900	36	#Mid	QAM16	21.81	20.41	17.21	PASS
LTE Band2	15	18900	36	#Max	QAM16	21.9	20.50	17.30	PASS
LTE Band2	15	18900	75	#0	QAM16	25.11	23.71	20.51	PASS
LTE Band2	15	19125	1	#0	QPSK	27.07	25.67	22.47	PASS
LTE Band2	15	19125	1	#Mid	QPSK	25.02	23.62	20.42	PASS
LTE Band2	15	19125	1	#Max	QPSK	23.2	21.80	18.60	PASS
LTE Band2	15	19125	36	#0	QPSK	25.14	23.74	20.54	PASS
LTE Band2	15	19125	36	#Mid	QPSK	25.13	23.73	20.53	PASS
LTE Band2	15	19125	36	#Max	QPSK	23.08	21.68	18.48	PASS
LTE Band2	15	19125	75	#0	QPSK	24.13	22.73	19.53	PASS
LTE Band2	15	19125	1	#0	QAM16	26.15	24.75	21.55	PASS
LTE Band2	15	19125	1	#Mid	QAM16	24.08	22.68	19.48	PASS
LTE Band2	15	19125	1	#Max	QAM16	22.28	20.88	17.68	PASS



LTE Band2	15	19125	36	#0	QAM16	24.13	22.73	19.53	PASS
LTE Band2	15	19125	36	#Mid	QAM16	24.12	22.72	19.52	PASS
LTE Band2	15	19125	36	#Max	QAM16	22.1	20.70	17.50	PASS
LTE Band2	15	19125	75	#0	QAM16	23.06	21.66	18.46	PASS
LTE Band2	20	18700	1	#0	QPSK	24.13	22.73	19.53	PASS
LTE Band2	20	18700	1	#Mid	QPSK	23.62	22.22	19.02	PASS
LTE Band2	20	18700	1	#Max	QPSK	23.88	22.48	19.28	PASS
LTE Band2	20	18700	50	#0	QPSK	22.94	21.54	18.34	PASS
LTE Band2	20	18700	50	#Mid	QPSK	22.9	21.50	18.30	PASS
LTE Band2	20	18700	50	#Max	QPSK	22.78	21.38	18.18	PASS
LTE Band2	20	18700	100	#0	QPSK	22.83	21.43	18.23	PASS
LTE Band2	20	18700	1	#0	QAM16	23.14	21.74	18.54	PASS
LTE Band2	20	18700	1	#Mid	QAM16	22.58	21.18	17.98	PASS
LTE Band2	20	18700	1	#Max	QAM16	22.81	21.41	18.21	PASS
LTE Band2	20	18700	50	#0	QAM16	21.81	20.41	17.21	PASS
LTE Band2	20	18700	50	#Mid	QAM16	21.8	20.40	17.20	PASS
LTE Band2	20	18700	50	#Max	QAM16	21.7	20.30	17.10	PASS
LTE Band2	20	18700	100	#0	QAM16	21.72	20.32	17.12	PASS
LTE Band2	20	18900	1	#0	QPSK	23.92	22.52	19.32	PASS
LTE Band2	20	18900	1	#Mid	QPSK	23.31	21.91	18.71	PASS
LTE Band2	20	18900	1	#Max	QPSK	24.03	22.63	19.43	PASS
LTE Band2	20	18900	50	#0	QPSK	22.9	21.50	18.30	PASS
LTE Band2	20	18900	50	#Mid	QPSK	22.9	21.50	18.30	PASS
LTE Band2	20	18900	50	#Max	QPSK	22.9	21.50	18.30	PASS
LTE Band2	20	18900	100	#0	QPSK	22.87	21.47	18.27	PASS
LTE Band2	20	18900	1	#0	QAM16	22.97	21.57	18.37	PASS
LTE Band2	20	18900	1	#Mid	QAM16	22.38	20.98	17.78	PASS
LTE Band2	20	18900	1	#Max	QAM16	23.13	21.73	18.53	PASS
LTE Band2	20	18900	50	#0	QAM16	21.8	20.40	17.20	PASS
LTE Band2	20	18900	50	#Mid	QAM16	21.72	20.32	17.12	PASS
LTE Band2	20	18900	50	#Max	QAM16	21.82	20.42	17.22	PASS
LTE Band2	20	18900	100	#0	QAM16	21.79	20.39	17.19	PASS
LTE Band2	20	19100	1	#0	QPSK	24.12	22.72	19.52	PASS
LTE Band2	20	19100	1	#Mid	QPSK	23.56	22.16	18.96	PASS
LTE Band2	20	19100	1	#Max	QPSK	23.67	22.27	19.07	PASS
LTE Band2	20	19100	50	#0	QPSK	22.99	21.59	18.39	PASS
LTE Band2	20	19100	50	#Mid	QPSK	23.05	21.65	18.45	PASS
LTE Band2	20	19100	50	#Max	QPSK	22.74	21.34	18.14	PASS
LTE Band2	20	19100	100	#0	QPSK	22.92	21.52	18.32	PASS
LTE Band2	20	19100	1	#0	QAM16	23.26	21.86	18.66	PASS
LTE Band2	20	19100	1	#Mid	QAM16	22.74	21.34	18.14	PASS
LTE Band2	20	19100	1	#Max	QAM16	22.7	21.30	18.10	PASS



LTE Band2	20	19100	50	#0	QAM16	21.98	20.58	17.38	PASS
LTE Band2	20	19100	50	#Mid	QAM16	21.93	20.53	17.33	PASS
LTE Band2	20	19100	50	#Max	QAM16	21.68	20.28	17.08	PASS
LTE Band2	20	19100	100	#0	QAM16	21.85	20.45	17.25	PASS

5.2.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900,

RBW is set to 51 kHz, VBW is set to 160kHz for WCDMA Band II,

RBW is set to 30 kHz, VBW is set to 91kHz for LTE Band 2 (1.4MHz),

RBW is set to 62 kHz, VBW is set to 180 kHz for LTE Band 2 (3MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 2(5MHz),


RBW is set to 200 kHz, VBW is set to 620kHz for LTE Band 2 (10MHz),

RBW is set to 300kHz,VBW is set to 910kHz for LTE Band 2 (15MHz).

RBW is set to 430kHz,VBW is set to 1.2MHz for LTE Band 2 (20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

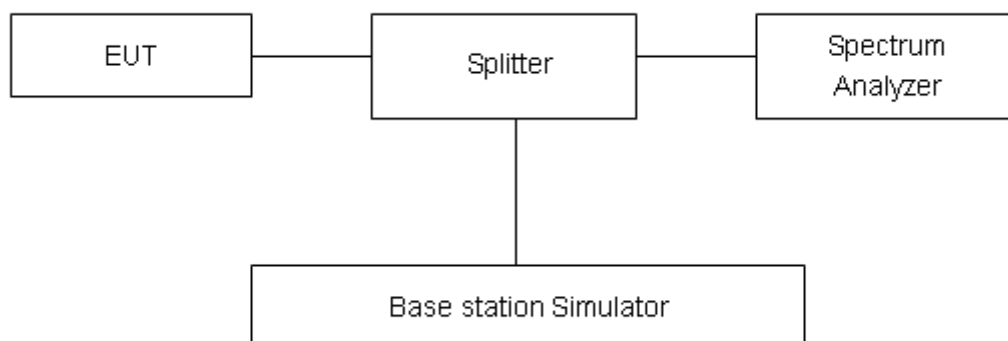

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 1900 (GMSK)	512	1850.2	0.2480	0.307
	661	1880.0	0.2476	0.309
	810	1909.8	0.2460	0.312
GPRS 1900 (GMSK)	512	1850.2	0.2472	0.312
	661	1880.0	0.2469	0.318
	810	1909.8	0.2466	0.315
EGPRS 1900 (8PSK)	512	1850.2	0.2573	0.328
	661	1880.0	0.2516	0.313
	810	1909.8	0.2531	0.314
WCDMA Band II (RMC)	9262	1852.4	4.1575	4.733
	9400	1880	4.1570	4.711
	9538	1907.6	4.1693	4.723

LTE Band 2					
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
QPSK	1.4	18607	1850.7	1.1052	1.242
		18900	1880.0	1.0966	1.237
		19193	1909.3	1.0989	1.248
	3	18615	1851.5	2.6972	2.961
		18900	1880	2.7011	2.958
		19185	1908.5	2.7091	2.967
	5	18625	1852.5	4.5340	4.955
		18900	1880	4.5112	4.907
		19175	1907.5	4.5177	4.896
	10	18650	1855	9.0069	9.890
		18900	1880	9.0179	9.745
		19150	1905	8.9900	9.772
	15	18675	1857.5	13.4770	14.940
		18900	1880	13.5080	14.890



	20	19125	1902.5	13.4690	14.720
		18700	1860	17.9720	19.710
		18900	1880	17.9970	19.720
		19100	1900	17.9050	19.530
16QAM	1.4	18607	1850.7	1.0934	1.241
		18900	1880.0	1.0949	1.246
		19193	1909.3	1.0951	1.242
	3	18615	1851.5	2.7032	2.977
		18900	1880	2.7067	2.977
		19185	1908.5	2.6953	2.981
	5	18625	1852.5	4.5196	4.980
		18900	1880	4.5157	4.903
		19175	1907.5	4.5204	5.000
	10	18650	1855	9.0130	9.888
		18900	1880	8.9884	9.863
		19150	1905	9.0009	9.773
	15	18675	1857.5	13.4480	14.600
		18900	1880	13.4670	14.680
		19125	1902.5	13.4650	14.800
	20	18700	1860	17.9510	19.500
		18900	1880	18.0240	19.690
		19100	1900	17.9370	19.590

GSM1900 GSM CH-Low



GSM1900 GPRS CH-Low



GSM 1900 GSM CH-Middle



GSM 1900 GPRS CH-Middle



GSM 1900 GSM CH-High



GSM 1900 GPRS CH-High





GSM1900 EGPRS CH-Low



WCDMA Band II RMC CH-Low



GSM 1900 EGPRS CH-Middle



WCDMA Band II RMC CH-Middle




GSM 1900 EGPRS CH-High




WCDMA Band II RMC CH-High




LTE Band 2 1.4MHz QPSK CH-Low

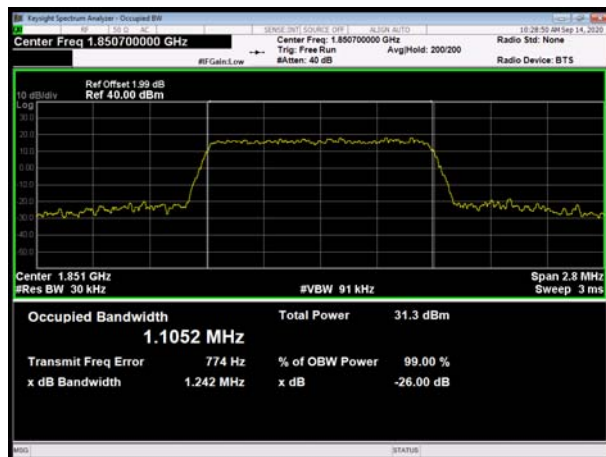


LTE Band 2 3MHz QPSK CH-Low

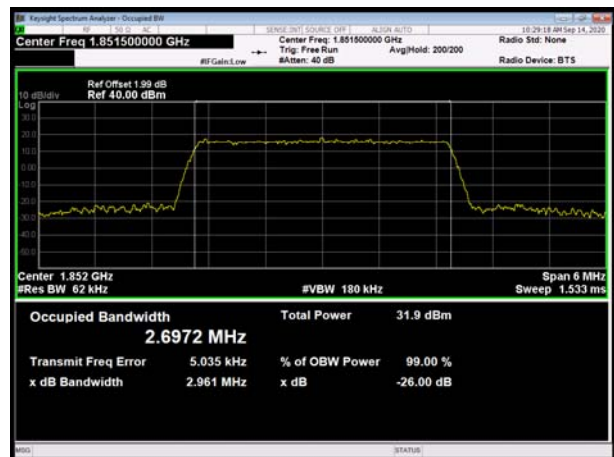


LTE Band 2 1.4MHz QPSK CH-Middle

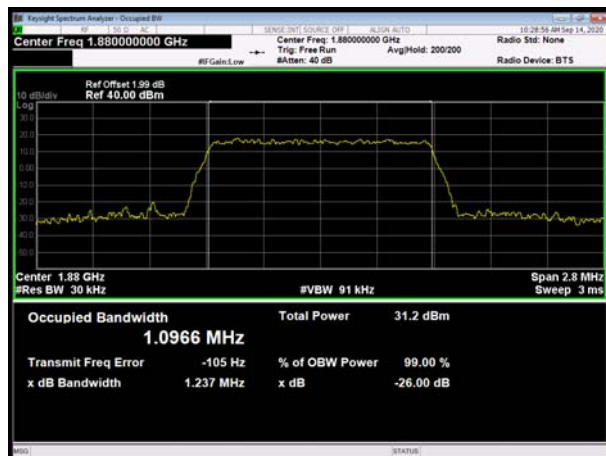


LTE Band 2 3MHz QPSK CH-Middle

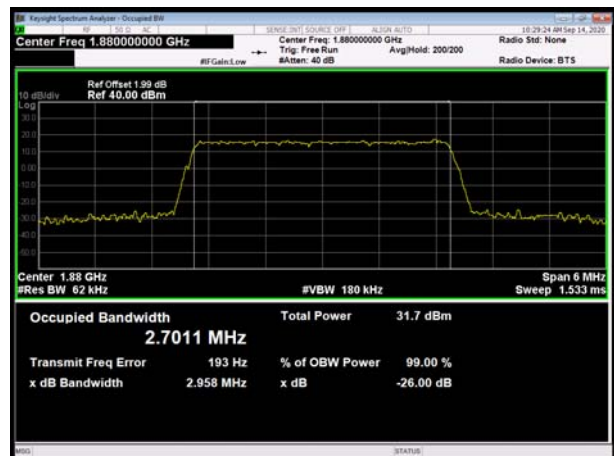


LTE Band 2 1.4MHz QPSK CH-High

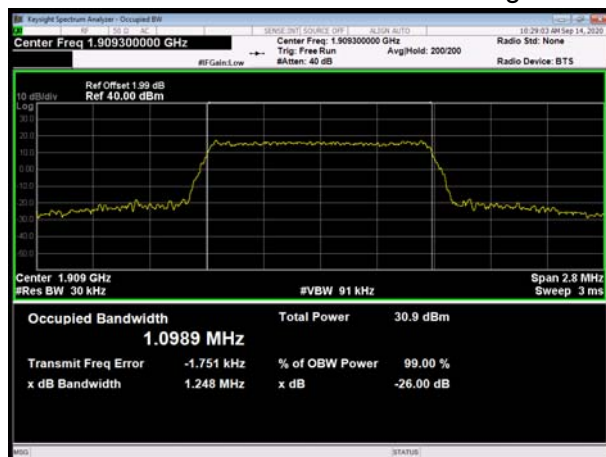


LTE Band 2 3MHz QPSK CH-High

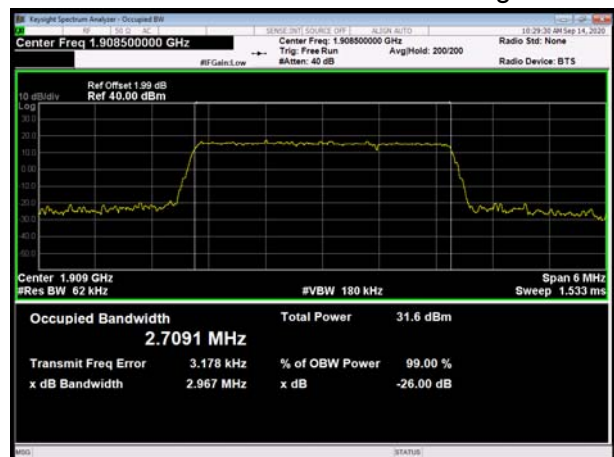


LTE Band 2 5MHz QPSK CH-Low

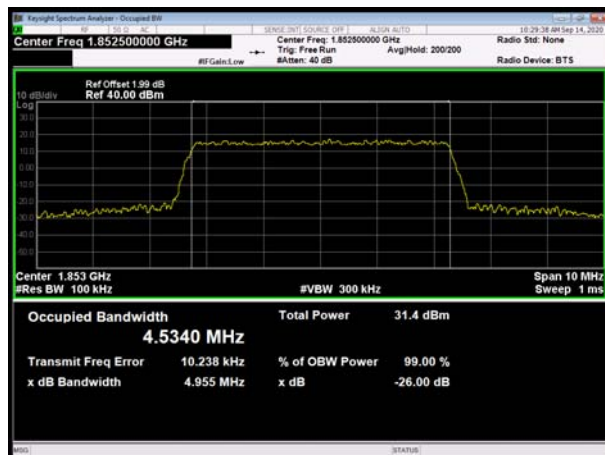


LTE Band 2 10MHz QPSK CH-Low

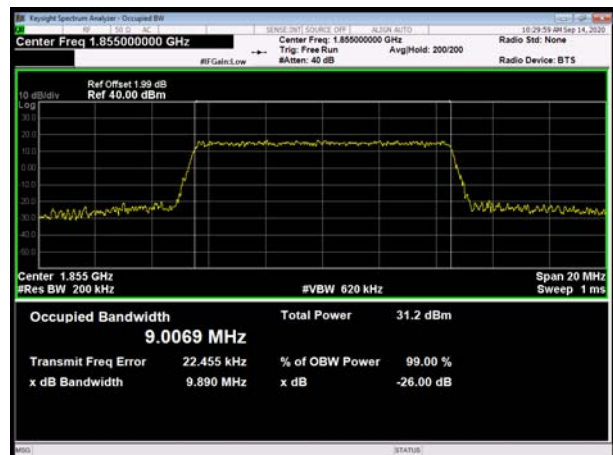


LTE Band 2 5MHz QPSK CH-Middle

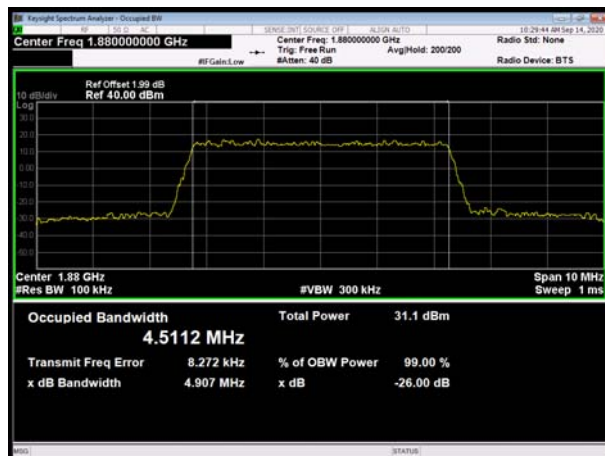


LTE Band 2 10MHz QPSK CH-Middle

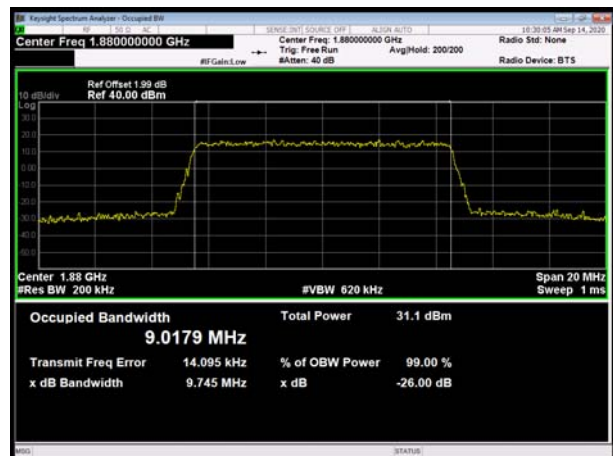


LTE Band 2 5MHz QPSK CH-High

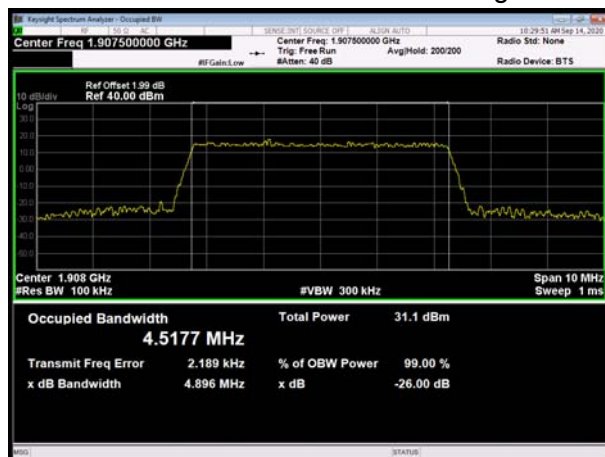


LTE Band 2 10MHz QPSK CH-High

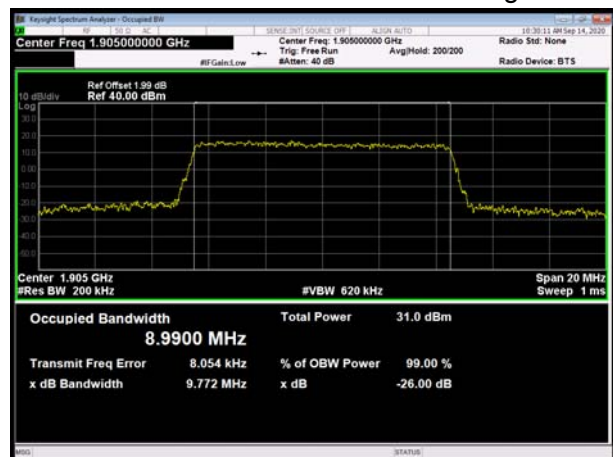


LTE Band 2 15MHz QPSK CH-Low

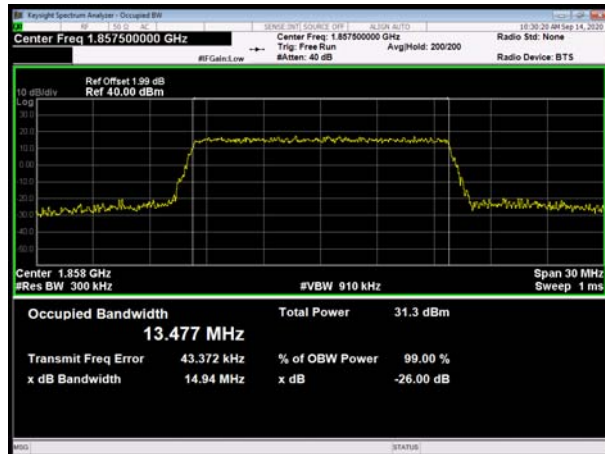


LTE Band 2 20MHz QPSK CH-Low

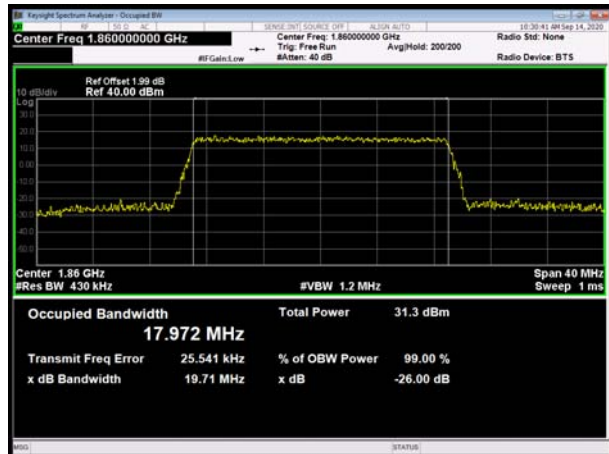


LTE Band 2 15MHz QPSK CH-Middle

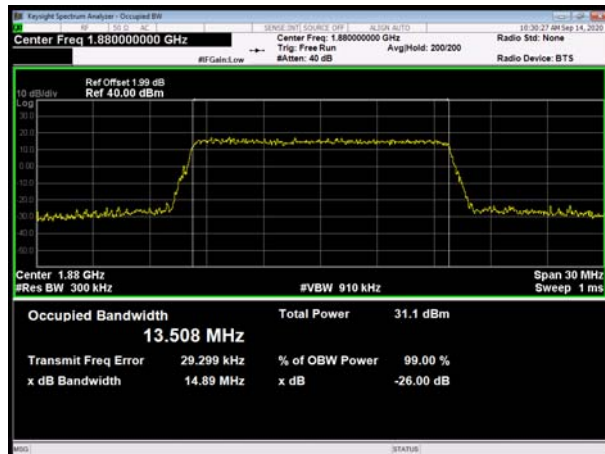


LTE Band 2 20MHz QPSK CH-Middle

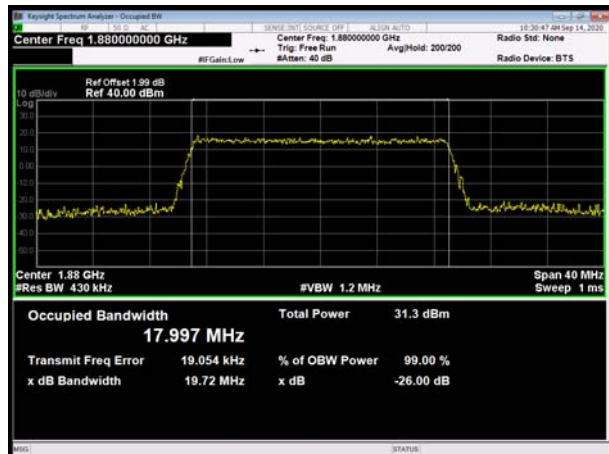


LTE Band 2 15MHz QPSK CH-High

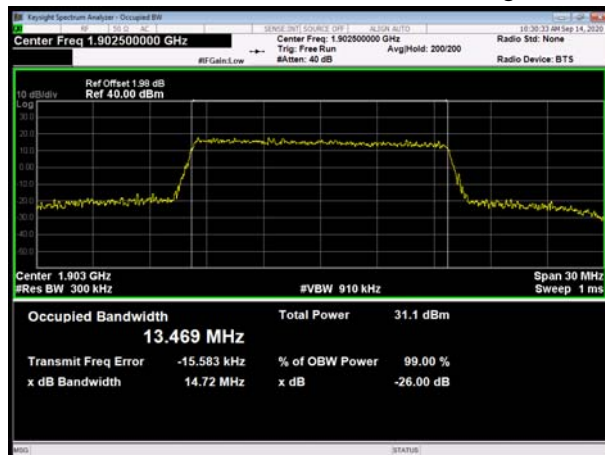


LTE Band 2 20MHz QPSK CH-High

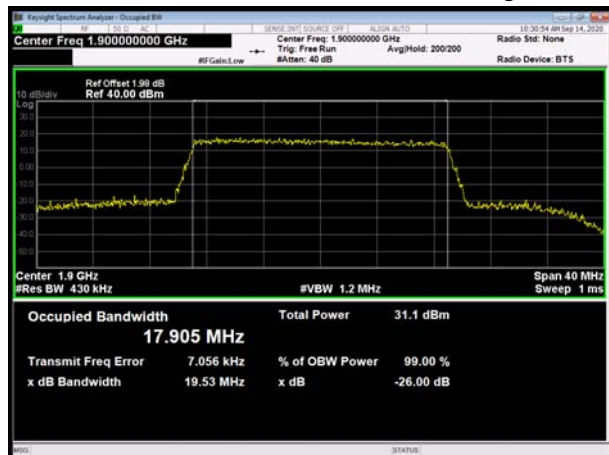

LTE Band 2 1.4MHz 16QAM CH-Low

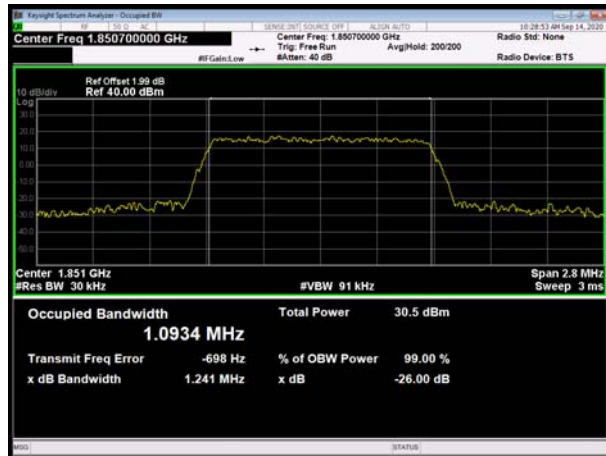


LTE Band 2 3MHz 16QAM CH-Low

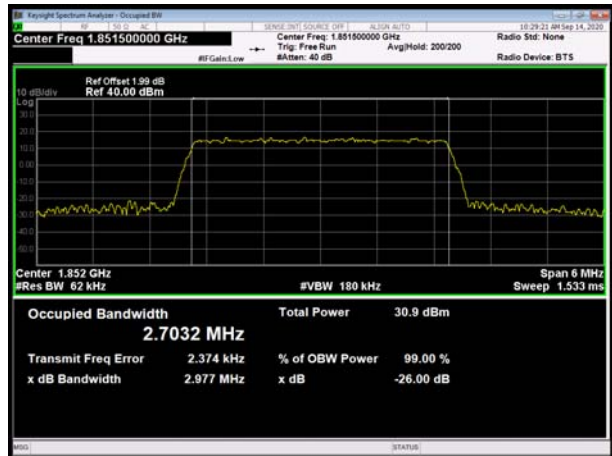


LTE Band 2 1.4MHz 16QAM CH-Middle




LTE Band 2 3MHz 16QAM CH-Middle

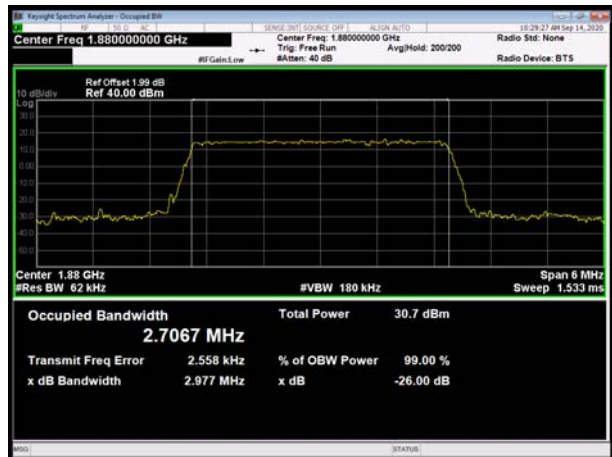


LTE Band 2 1.4MHz 16QAM CH-High

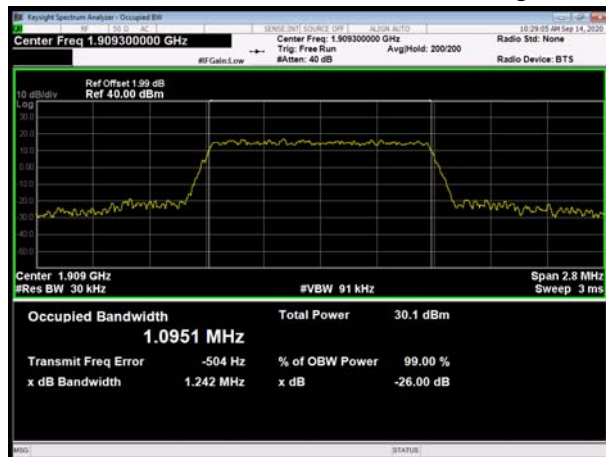


LTE Band 2 3MHz 16QAM CH-High

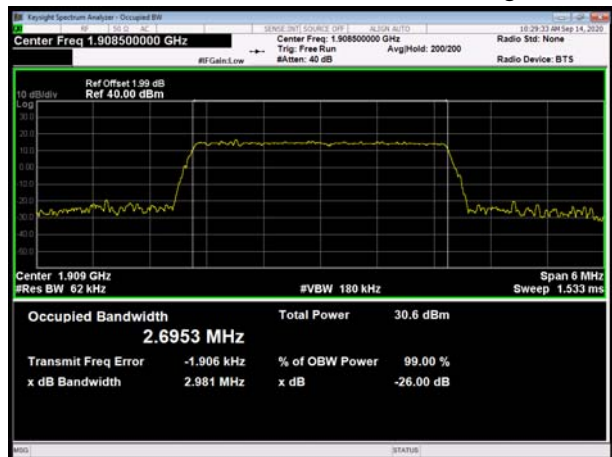


LTE Band 2 5MHz 16QAM CH-Low

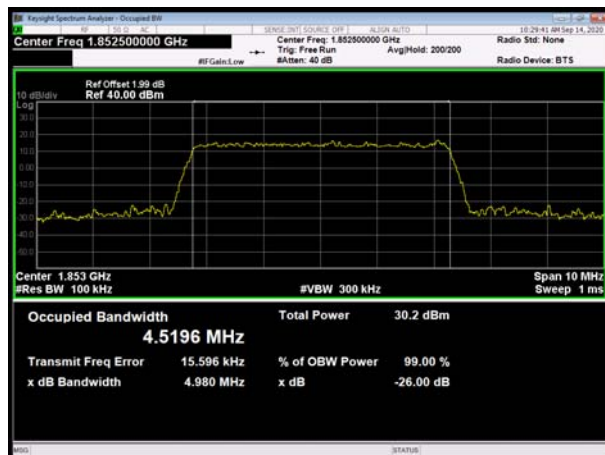


LTE Band 2 10MHz 16QAM CH-Low

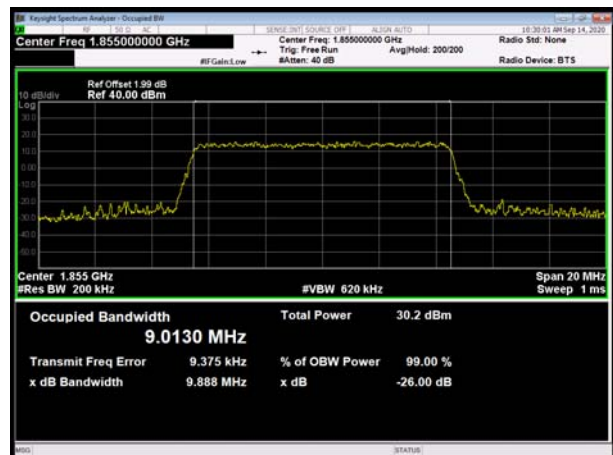


LTE Band 2 5MHz 16QAM CH-Middle

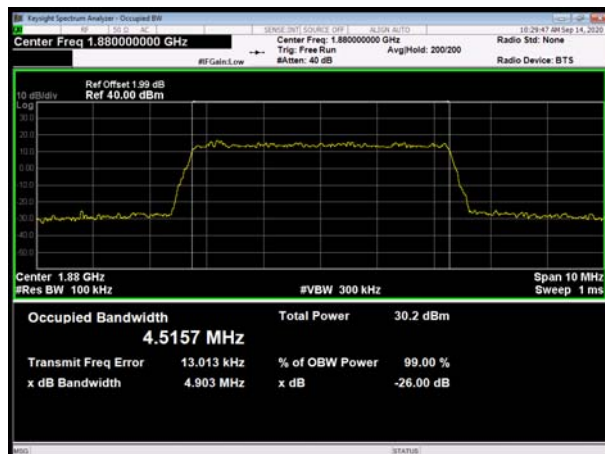


LTE Band 2 10MHz 16QAM CH-Middle

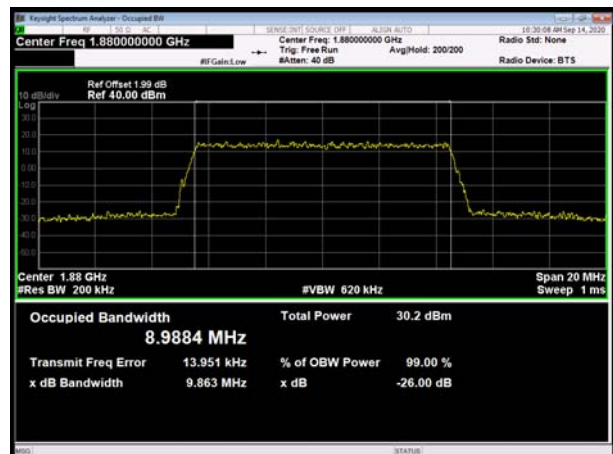


LTE Band 2 5MHz 16QAM CH-High

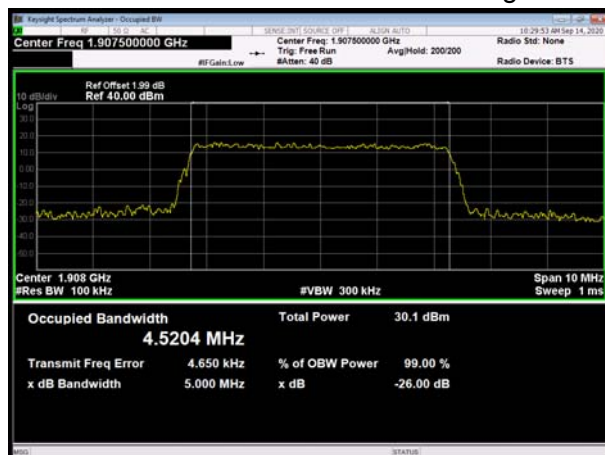


LTE Band 2 10MHz 16QAM CH-High

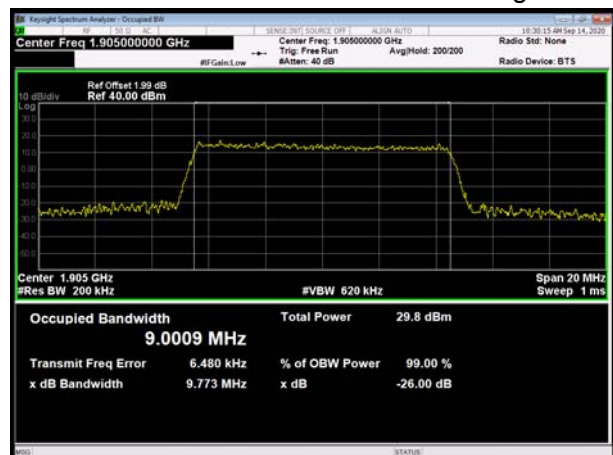

LTE Band 2 15MHz 16QAM CH-Low

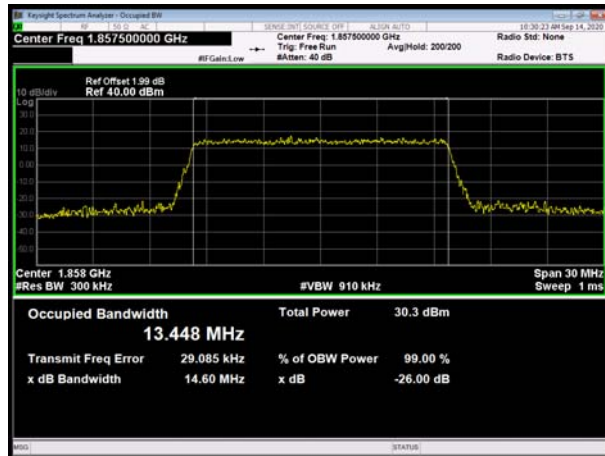


LTE Band 2 20MHz 16QAM CH-Low

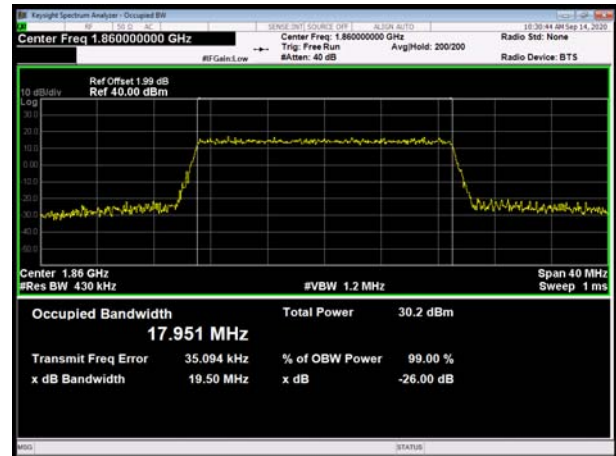


LTE Band 2 15MHz 16QAM CH-Middle




LTE Band 2 20MHz 16QAM CH-Middle

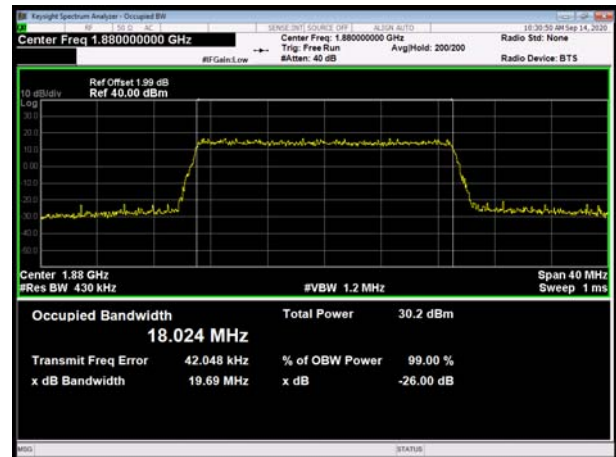

LTE Band 2 15MHz 16QAM CH-High

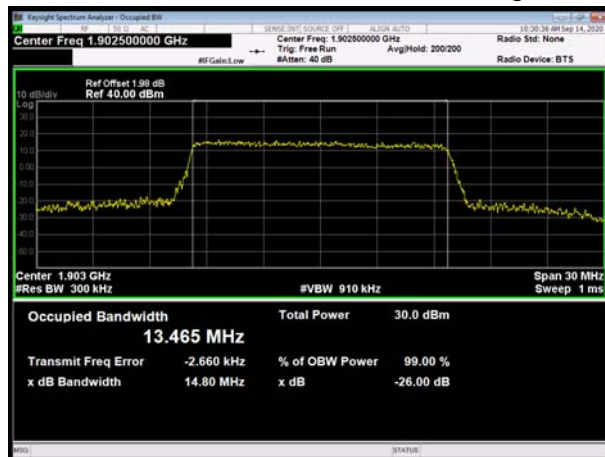

LTE Band 2 20MHz 16QAM CH-High

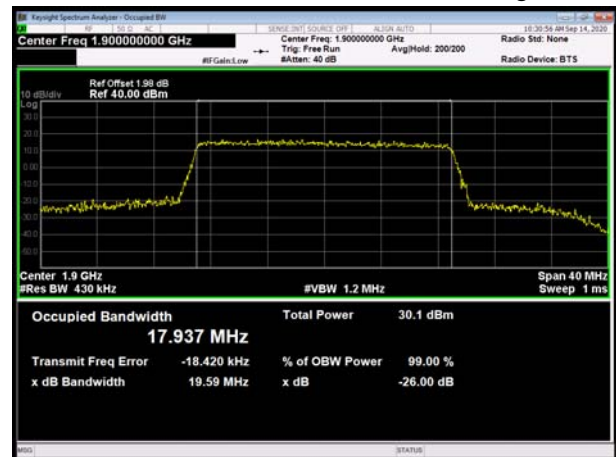

5.3.Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900, RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II, RBW is set to 15kHz, VBW is set to 43kHz for LTE Band 2(1.4MHz), RBW is set to 30kHz,VBW is set to 91kHz for LTE Band 2 (3MHz), RBW is set to 51kHz,VBW is set to 150kHz for LTE Band 2(5MHz), RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 2(10MHz), RBW is set to 150kHz,VBW is set to 470kHz for LTE Band 2 (15MHz), RBW is set to 200kHz,VBW is set to 620kHz for LTE Band 2 (20MHz). Spectrum analyzer plots are included on the following pages.

Test Setup

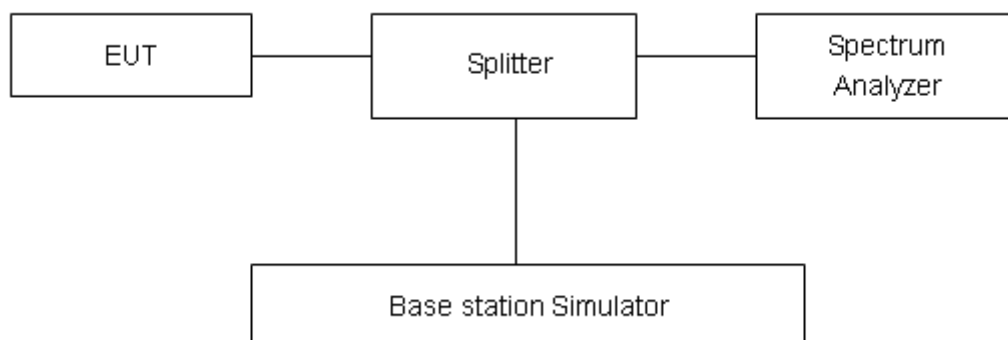

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

GSM1900 GSM CH-Low




GSM 1900 GSM CH-High



GSM1900 GPRS CH-Low



GSM 1900 GPRS CH-High

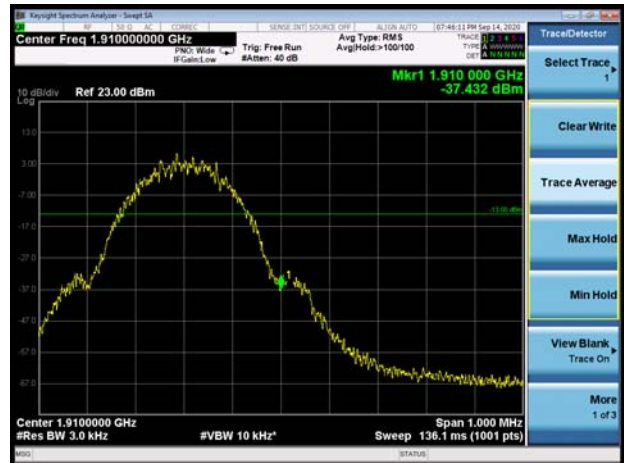

GSM1900 EGPRS CH-Low



GSM 1900 EGPRS CH-High






WCDMA Band II RMC CH-Low




WCDMA Band II RMC CH-High




LTE Band 2 1.4MHz QPSK 1RB CH-Low

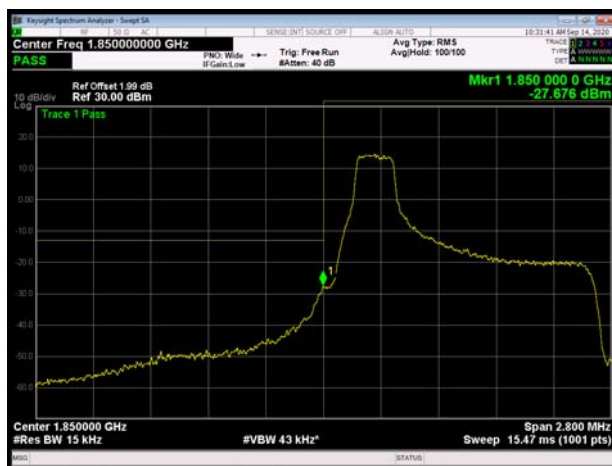


LTE Band 2 1.4MHz QPSK 1RB CH-High

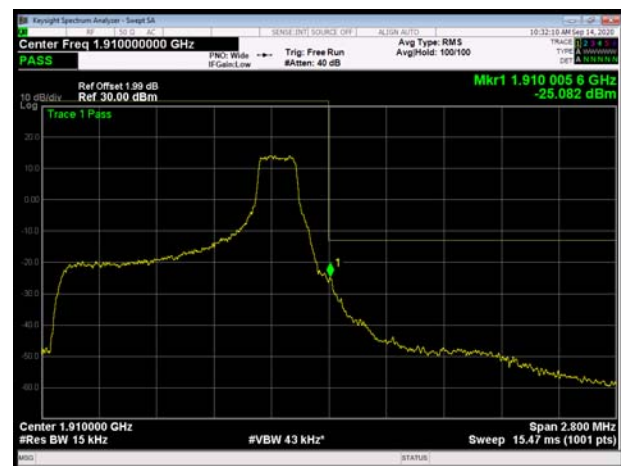

LTE Band 2 1.4MHz QPSK 100%RB CH-Low

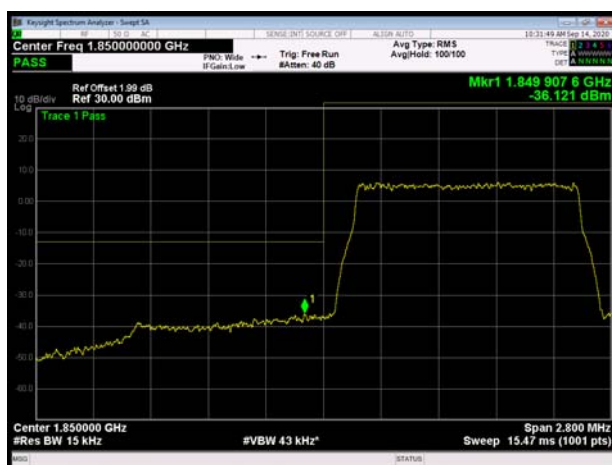


LTE Band 2 1.4MHz QPSK 100%RB CH-High

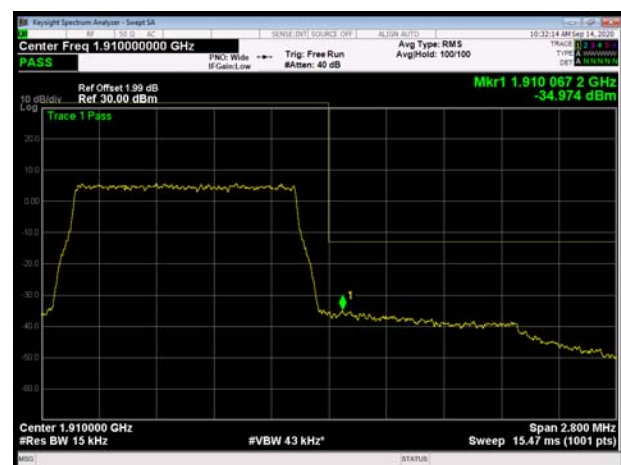





LTE Band 2 3MHz QPSK 1RB CH-Low

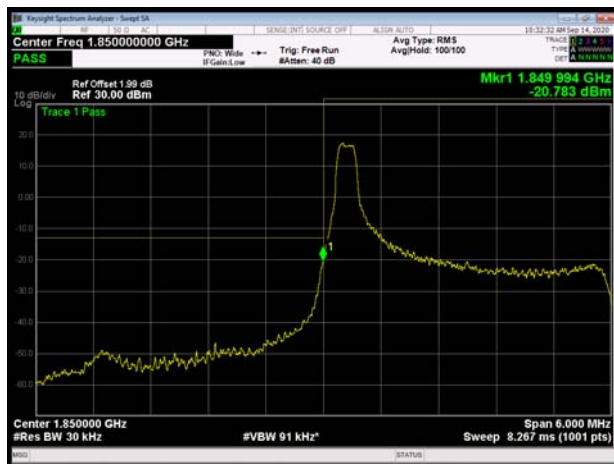


LTE Band 2 3MHz QPSK 1RB CH-High

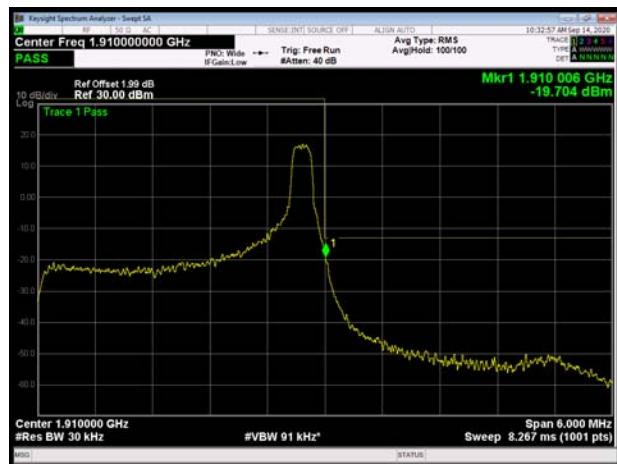


LTE Band 2 3MHz QPSK 100%RB CH-Low

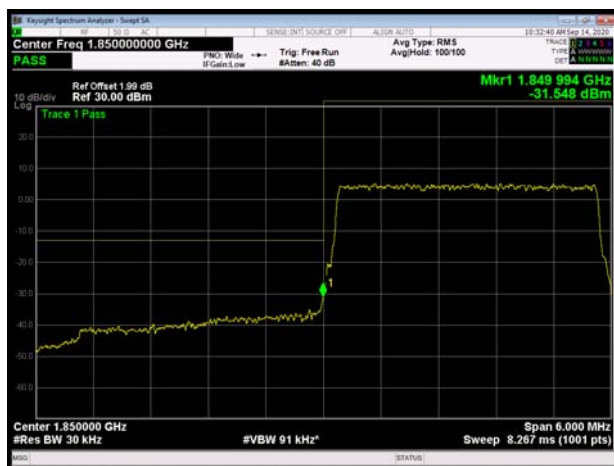


LTE Band 2 3MHz QPSK 100%RB CH-High

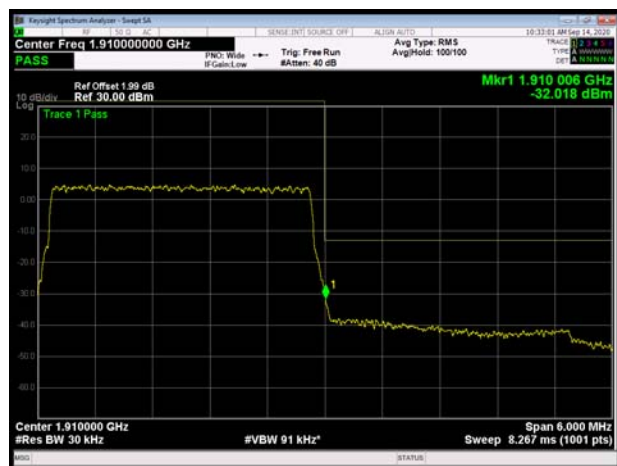

LTE Band 2 5MHz QPSK 1RB CH-Low

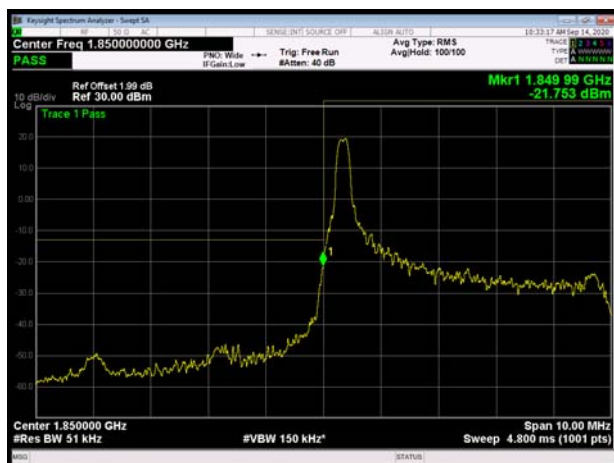


LTE Band 2 5MHz QPSK 1RB CH-High

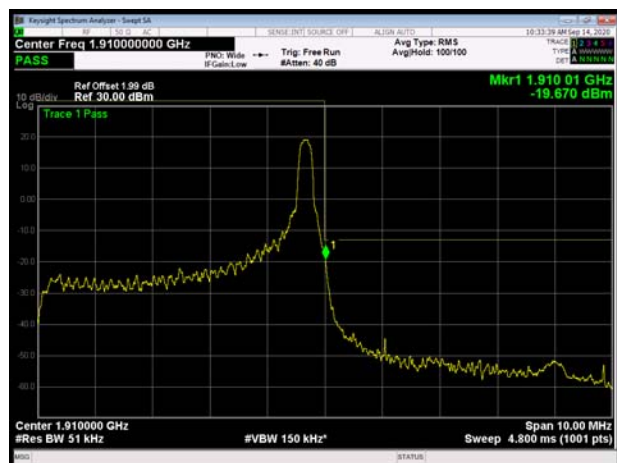





LTE Band 2 5MHz QPSK 100%RB CH-Low

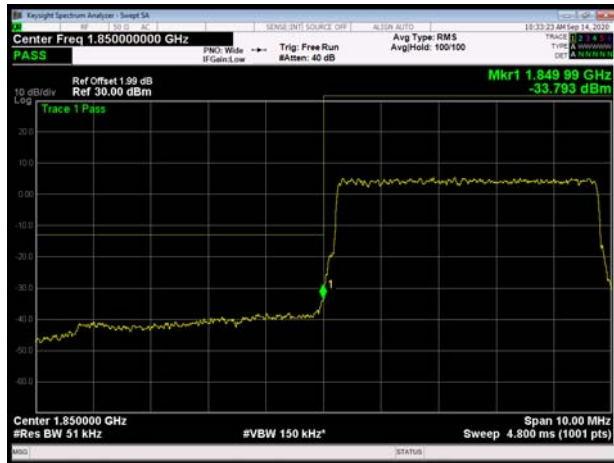


LTE Band 2 5MHz QPSK 100%RB CH-High

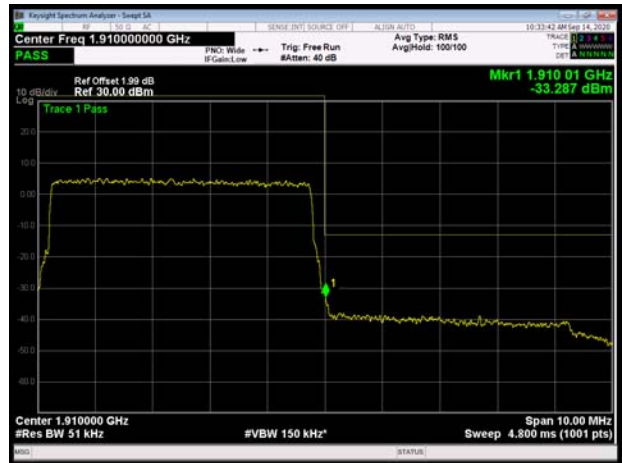


LTE Band 2 10MHz QPSK 1RB CH-Low

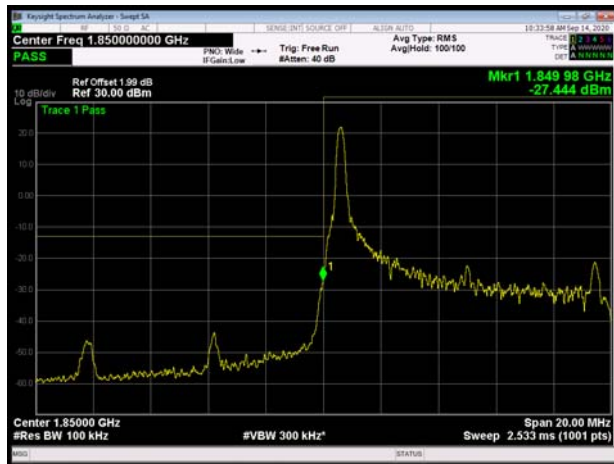


LTE Band 2 10MHz QPSK 1RB CH-High

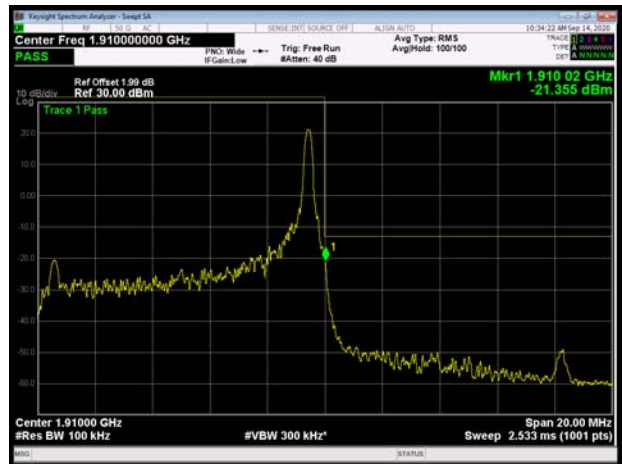

LTE Band 2 10MHz QPSK 100%RB CH-Low

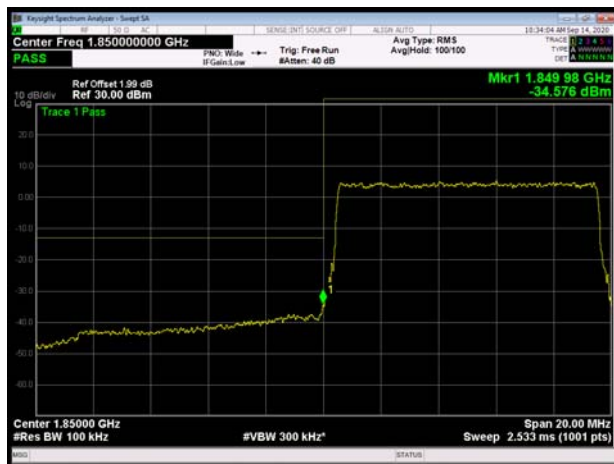


LTE Band 2 10MHz QPSK 100%RB CH-High

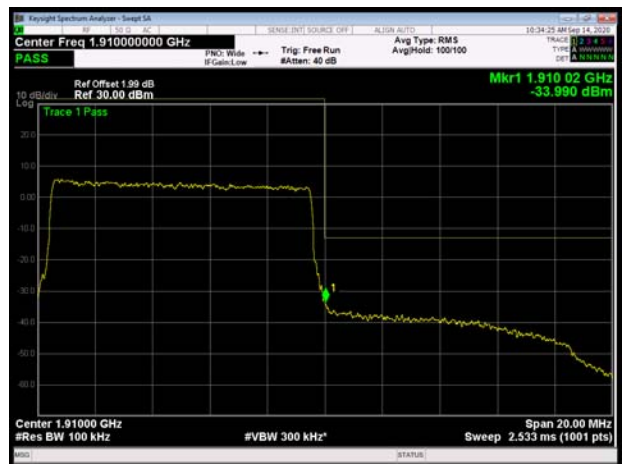





LTE Band 2 15MHz QPSK 1RB CH-Low

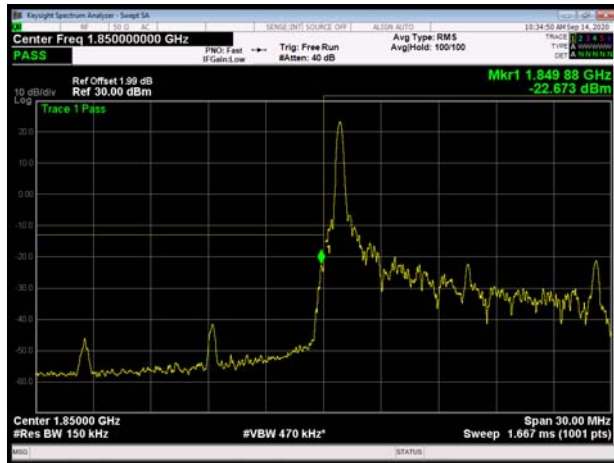

LTE Band 2 15MHz QPSK 1RB CH-High

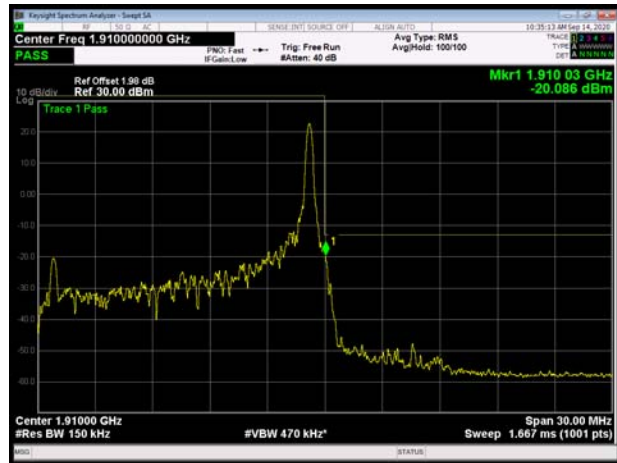


LTE Band 2 15MHz QPSK 100%RB CH-Low

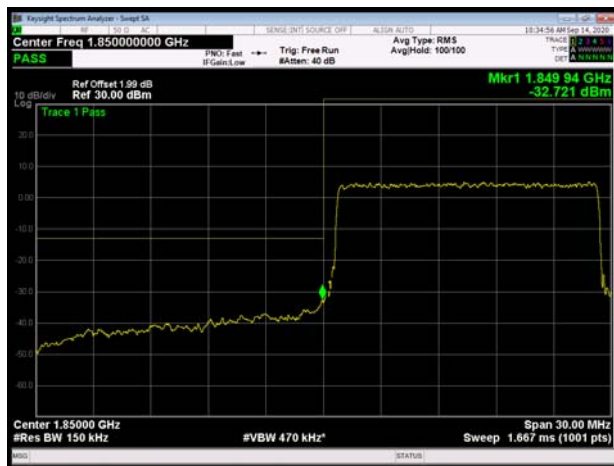


LTE Band 2 15MHz QPSK 100%RB CH-High



LTE Band 2 20MHz QPSK 1RB CH-Low

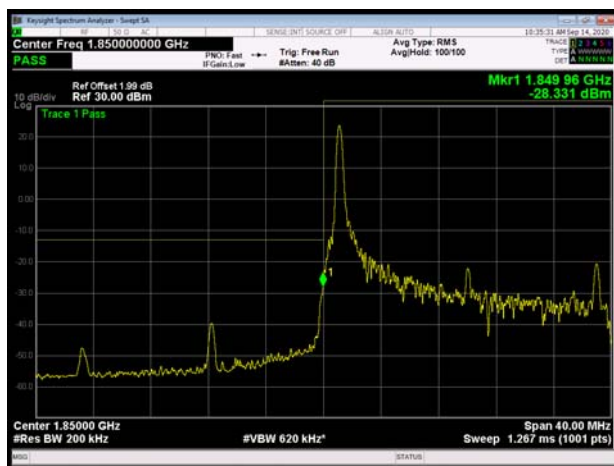


LTE Band 2 20MHz QPSK 1RB CH-High

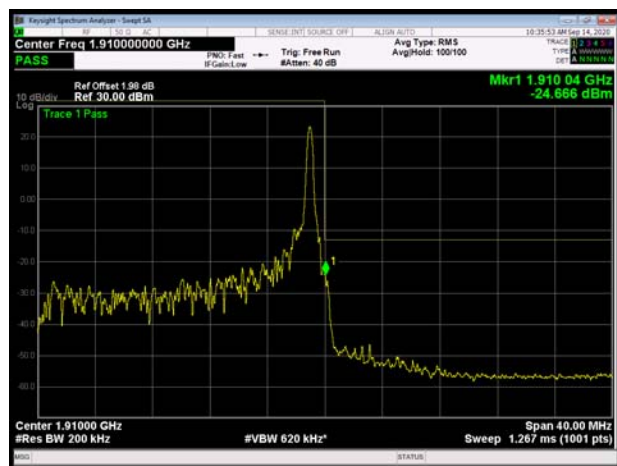




LTE Band 2 20MHz QPSK 100%RB CH-Low

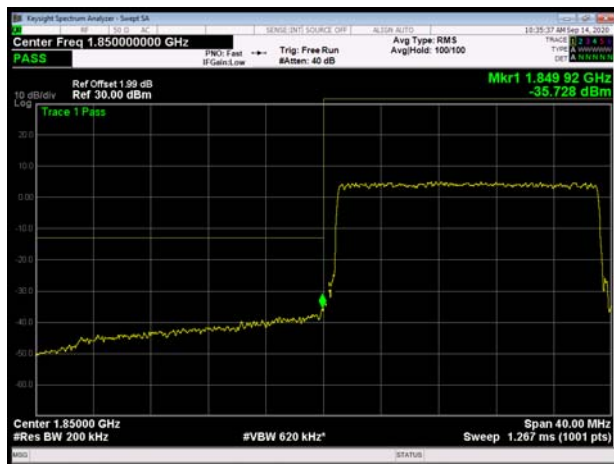


LTE Band 2 20MHz QPSK 100%RB CH-High




LTE Band 2 1.4MHz 16QAM 1RB CH-Low

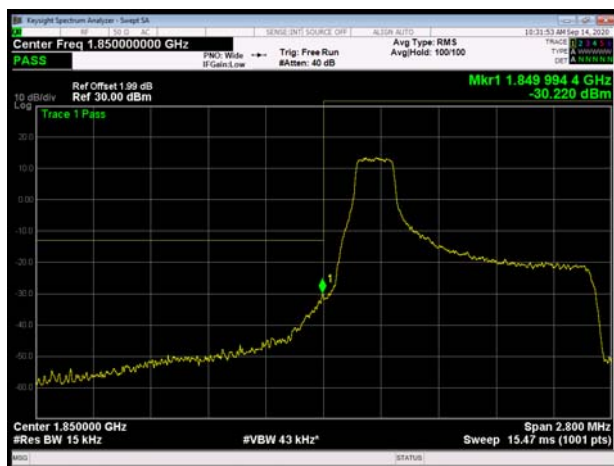


LTE Band 2 1.4MHz 16QAM 1RB CH-High

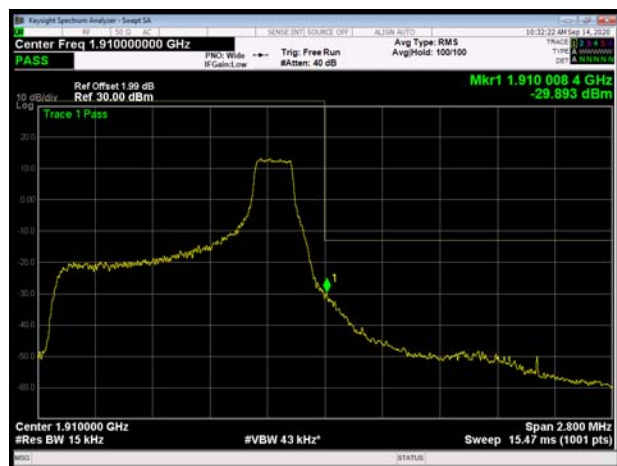

LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

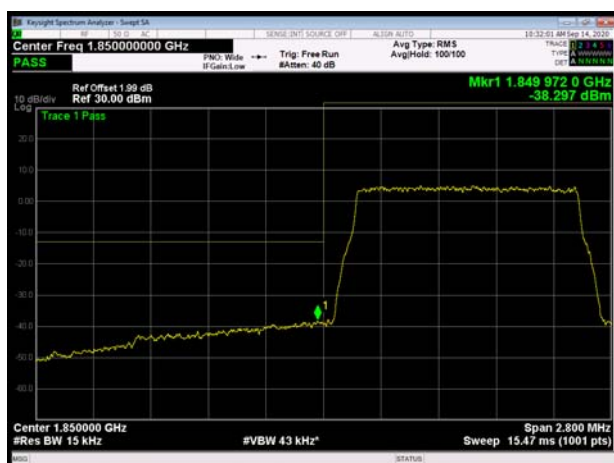


LTE Band 2 1.4MHz 16QAM 100%RB CH-High

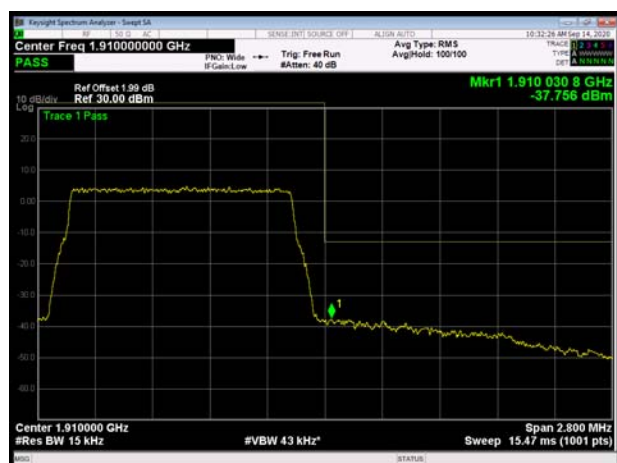





LTE Band 2 3MHz 16QAM 1RB CH-Low

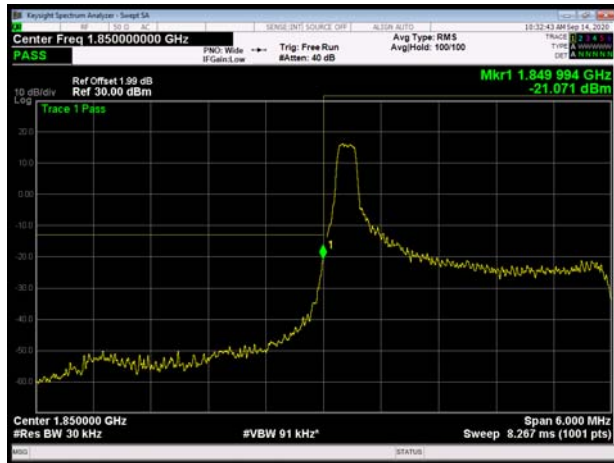

LTE Band 2 3MHz 16QAM 1RB CH-High

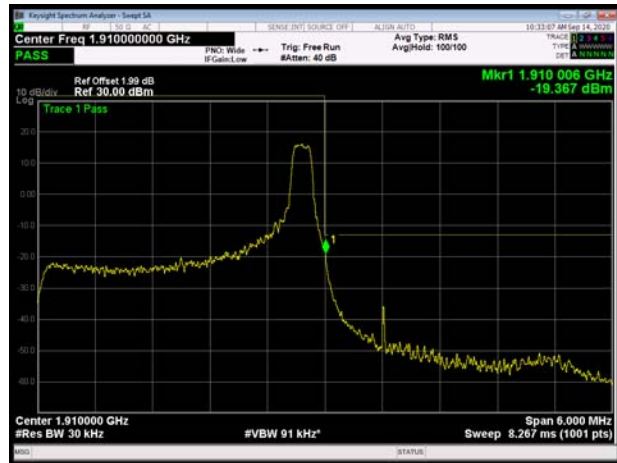


LTE Band 2 3MHz 16QAM 100%RB CH-Low

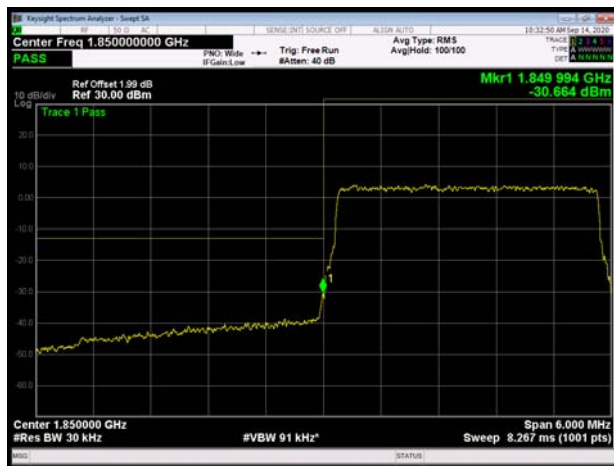


LTE Band 2 3MHz 16QAM 100%RB CH-High



LTE Band 2 5MHz 16QAM 1RB CH-Low

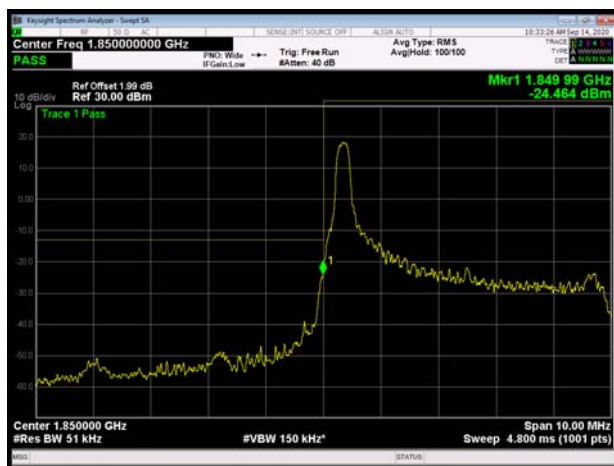


LTE Band 2 5MHz 16QAM 1RB CH-High

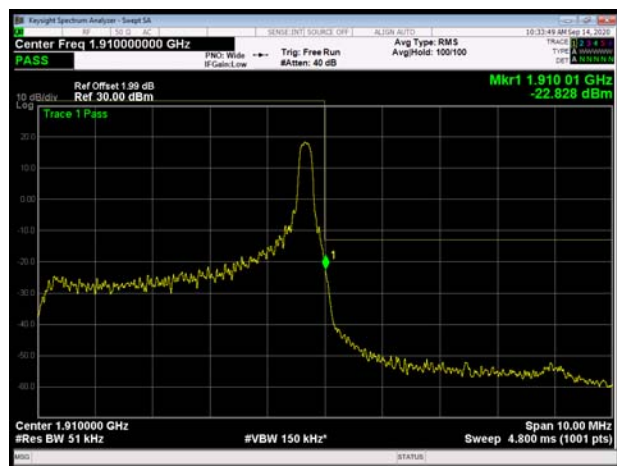




LTE Band 2 5MHz 16QAM 100%RB CH-Low

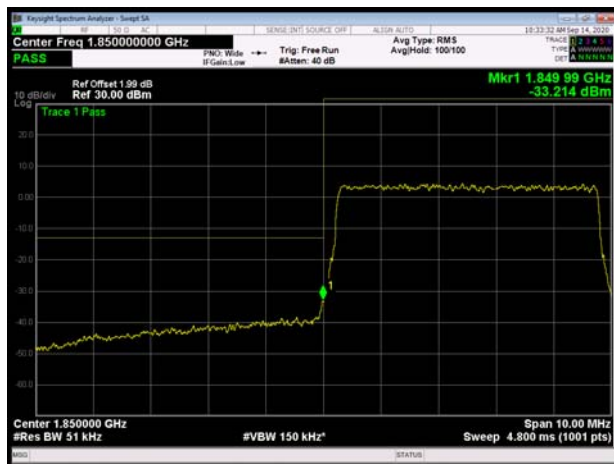


LTE Band 2 5MHz 16QAM 100%RB CH-High




LTE Band 2 10MHz 16QAM 1RB CH-Low

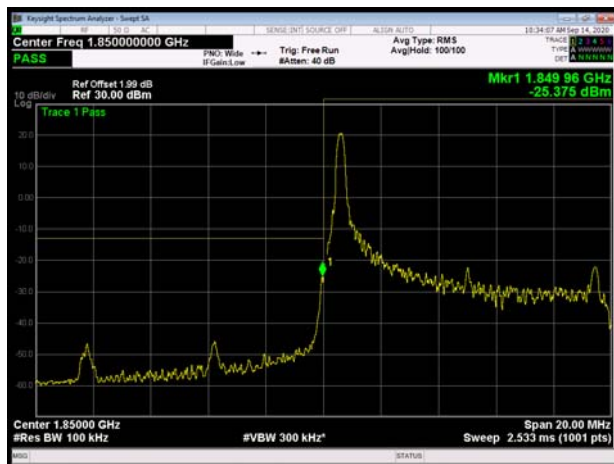


LTE Band 2 10MHz 16QAM 1RB CH-High

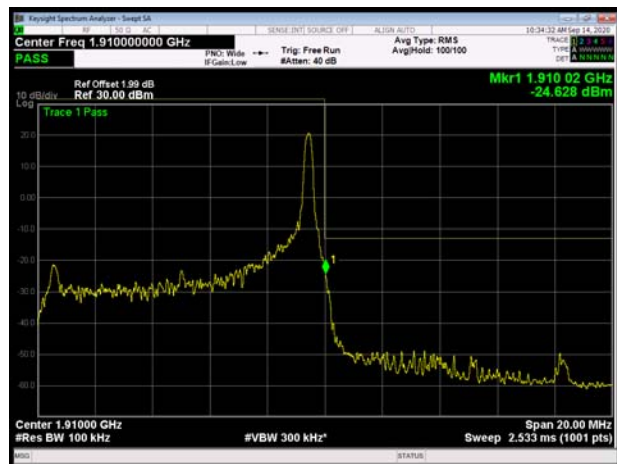

LTE Band 2 10MHz 16QAM 100%RB CH-Low

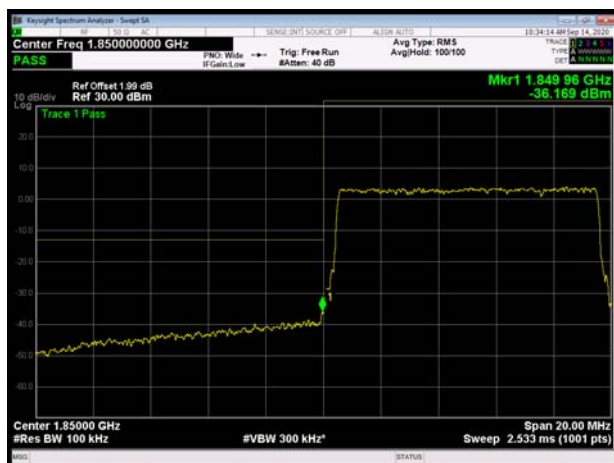


LTE Band 2 10MHz 16QAM 100%RB CH-High

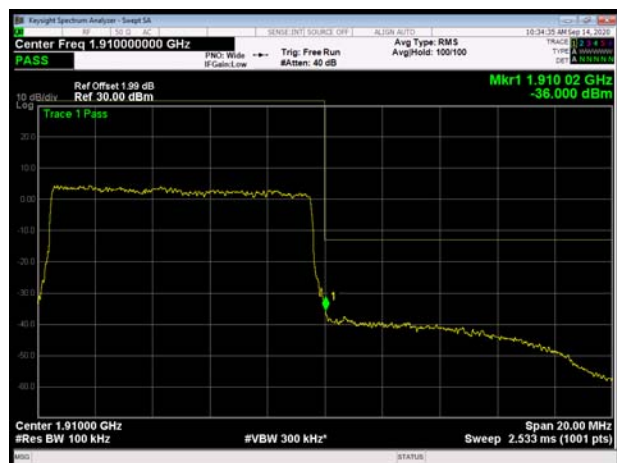





LTE Band 2 15MHz 16QAM 1RB CH-Low

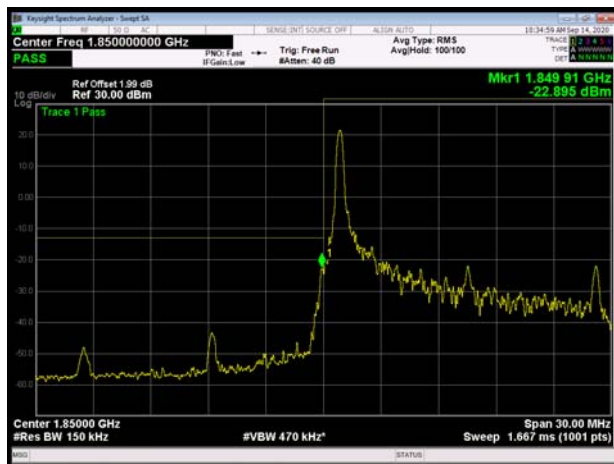


LTE Band 2 15MHz 16QAM 1RB CH-High

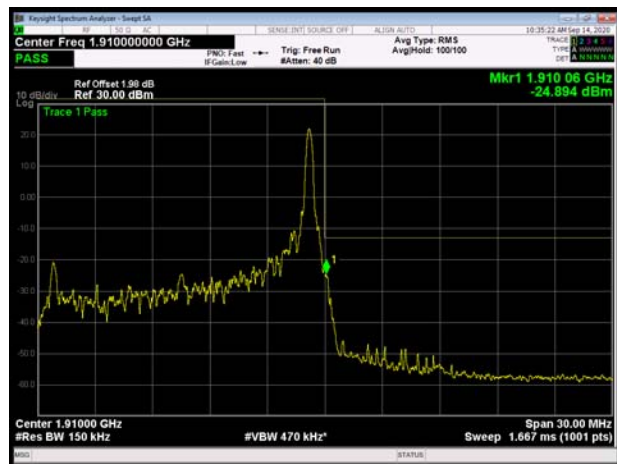


LTE Band 2 15MHz 16QAM 100%RB CH-Low

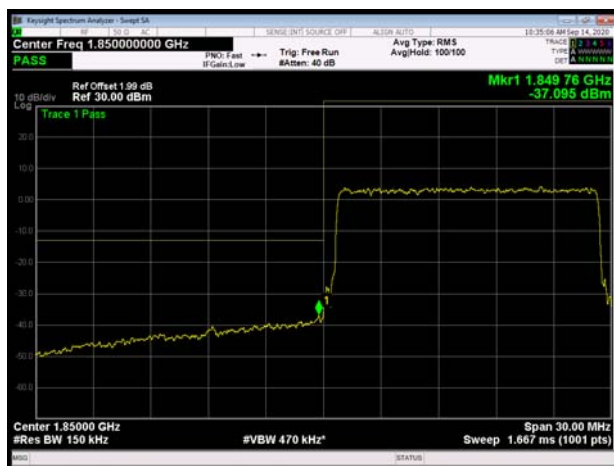


LTE Band 2 15MHz 16QAM 100%RB CH-High

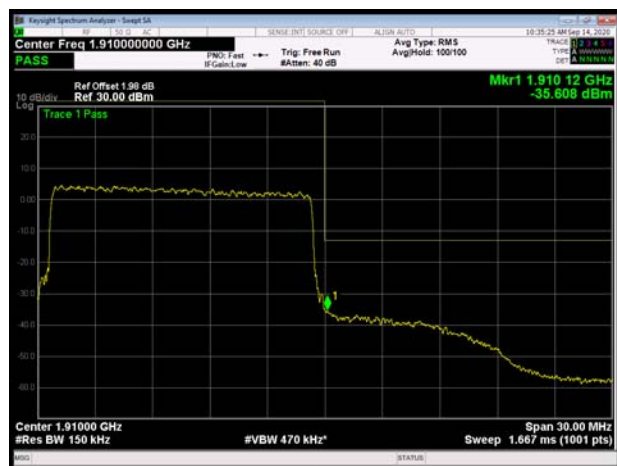

LTE Band 2 20MHz 16QAM 1RB CH-Low

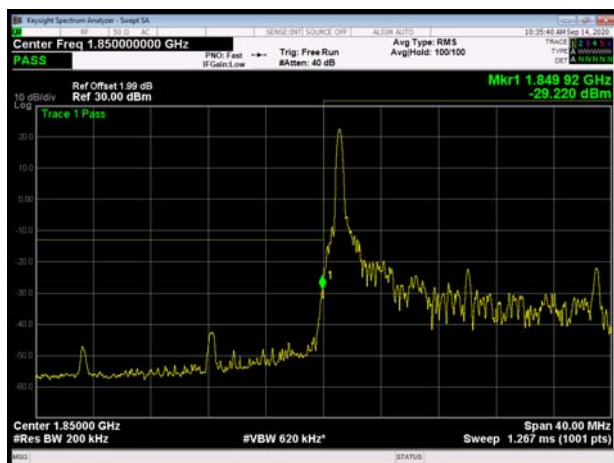


LTE Band 2 20MHz 16QAM 1RB CH-High

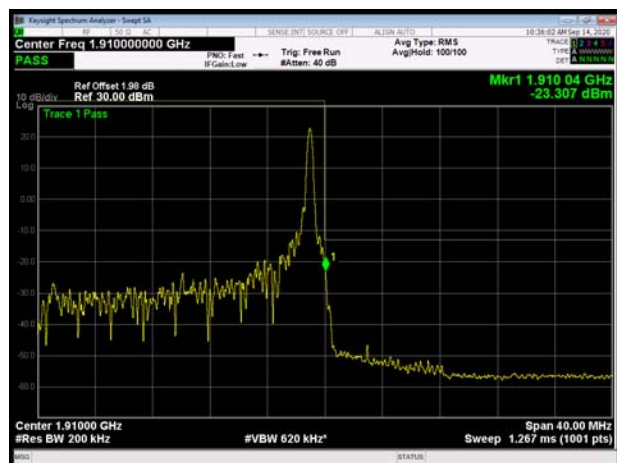




LTE Band 2 20MHz 16QAM 100%RB CH-Low

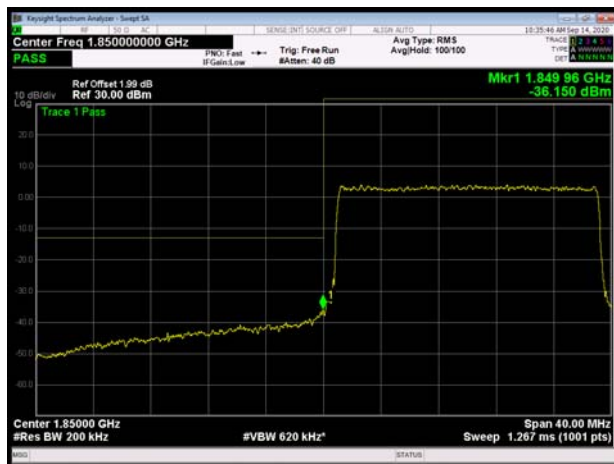

LTE Band 2 20MHz 16QAM 100%RB CH-High

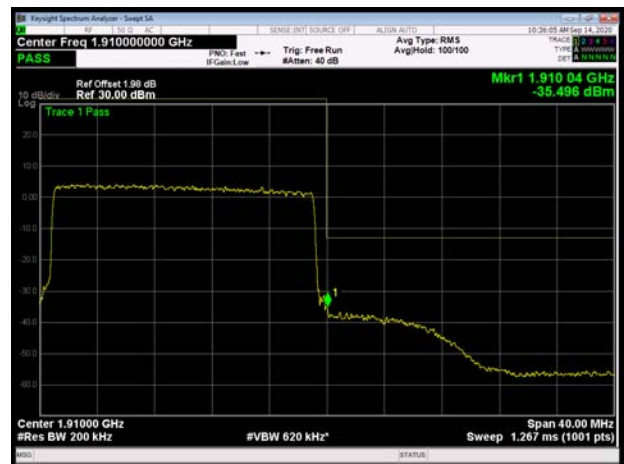

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

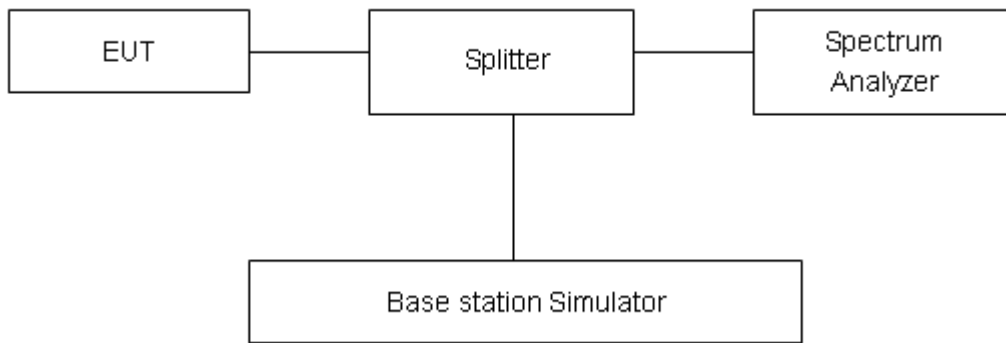

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
GSM 1900 (GMSK)	512	1850.2	32.57	30.58	1.99	≤13	PASS
	661	1880	32.17	30.14	2.03	≤13	PASS
	810	1909.8	32.00	29.96	2.04	≤13	PASS
GPRS 1900 (GMSK)	512	1850.2	32.83	30.57	2.26	≤13	PASS
	661	1880	32.41	30.23	2.18	≤13	PASS
	810	1909.8	32.46	30.31	2.15	≤13	PASS
EGPRS 1900 (8PSK)	512	1850.2	28.64	26.01	2.63	≤13	PASS
	661	1880	28.69	26.10	2.59	≤13	PASS
	810	1909.8	28.52	25.98	2.54	≤13	PASS
WCDMA Band II (RMC)	9262	1852.4	24.34	21.63	2.71	≤13	PASS
	9400	1880	24.21	21.29	2.92	≤13	PASS
	9538	1907.6	24.39	21.67	2.72	≤13	PASS



LTE Band 2								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	18607	1850.7	29.11	24.34	4.77	≤13	PASS
		18900	1880.0	28.57	23.07	5.50	≤13	PASS
		19193	1909.3	27.95	22.98	4.97	≤13	PASS
	3	18615	1851.5	28.43	23.37	5.06	≤13	PASS
		18900	1880	28.55	23.16	5.39	≤13	PASS
		19185	1908.5	28.08	23.08	5.00	≤13	PASS
	5	18625	1852.5	28.65	23.41	5.24	≤13	PASS
		18900	1880	28.85	23.18	5.67	≤13	PASS
		19175	1907.5	28.33	23.12	5.21	≤13	PASS
	10	18650	1855	28.63	23.38	5.25	≤13	PASS
		18900	1880	28.88	23.20	5.68	≤13	PASS
		19150	1905	28.19	23.15	5.04	≤13	PASS
	15	18675	1857.5	28.88	23.32	5.56	≤13	PASS
		18900	1880	29.20	23.24	5.96	≤13	PASS
		19125	1902.5	28.39	23.15	5.24	≤13	PASS
	20	18700	1860	28.80	23.38	5.42	≤13	PASS
		18900	1880	28.93	23.25	5.68	≤13	PASS
		19100	1900	28.40	23.22	5.18	≤13	PASS
16QAM	1.4	18607	1850.7	28.11	22.19	5.92	≤13	PASS
		18900	1880.0	28.15	22.06	6.09	≤13	PASS
		19193	1909.3	27.74	21.95	5.79	≤13	PASS
	3	18615	1851.5	28.19	22.32	5.87	≤13	PASS
		18900	1880	28.25	22.09	6.16	≤13	PASS
		19185	1908.5	27.82	22.00	5.82	≤13	PASS
	5	18625	1852.5	28.38	22.31	6.07	≤13	PASS
		18900	1880	28.46	22.10	6.36	≤13	PASS
		19175	1907.5	28.14	22.07	6.07	≤13	PASS
	10	18650	1855	28.37	22.34	6.03	≤13	PASS
		18900	1880	28.51	22.09	6.42	≤13	PASS
		19150	1905	27.91	22.08	5.83	≤13	PASS
	15	18675	1857.5	28.47	22.31	6.16	≤13	PASS
		18900	1880	28.67	22.18	6.49	≤13	PASS
		19125	1902.5	28.02	22.10	5.92	≤13	PASS
	20	18700	1860	28.45	22.27	6.18	≤13	PASS
		18900	1880	28.61	22.18	6.43	≤13	PASS
		19100	1900	28.10	22.16	5.94	≤13	PASS

5.5.Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.43 V, with a nominal voltage of 3.85V.

Test setup

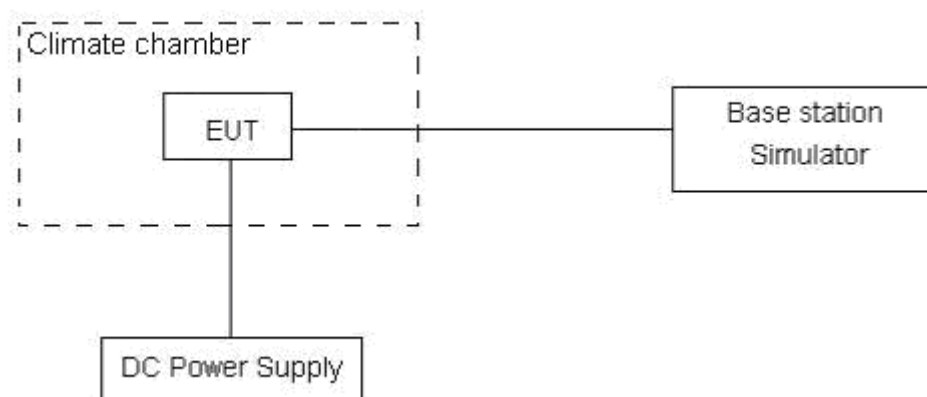

Limits

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

GSM1900						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal (25℃)	Normal	2.94	12.13	0.00156	0.00645	PASS
Extreme (55℃)		4.20	8.57	0.00224	0.00456	PASS
Extreme (50℃)		2.70	8.76	0.00144	0.00466	PASS
Extreme (40℃)		11.51	8.07	0.00612	0.00429	PASS
Extreme (30℃)		11.49	5.55	0.00611	0.00295	PASS
Extreme (20℃)		17.68	9.03	0.00941	0.00481	PASS
Extreme (10℃)		6.45	6.36	0.00343	0.00338	PASS
Extreme (0℃)		11.93	17.80	0.00635	0.00947	PASS
Extreme (-10℃)		1.92	1.88	0.00102	0.00100	PASS
Extreme (-20℃)		16.67	12.61	0.00887	0.00671	PASS
Extreme (-30℃)		17.91	11.62	0.00953	0.00618	PASS
25℃	LV	16.10	5.71	0.00857	0.00304	PASS
	HV	9.09	14.14	0.00483	0.00752	PASS

WCDMA Band II						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	QPSK	BPSK	QPSK	BPSK	
Normal (25℃)	Normal	17.35	6.99	0.00923	0.00372	PASS
Extreme (55℃)		9.90	17.04	0.00526	0.00906	PASS
Extreme (50℃)		6.35	11.56	0.00338	0.00615	PASS
Extreme (40℃)		17.19	16.76	0.00915	0.00892	PASS
Extreme (30℃)		13.57	4.96	0.00722	0.00264	PASS
Extreme (20℃)		3.06	9.96	0.00163	0.00530	PASS
Extreme (10℃)		16.35	16.91	0.00870	0.00899	PASS
Extreme (0℃)		4.78	7.80	0.00254	0.00415	PASS
Extreme (-10℃)		5.24	13.25	0.00279	0.00705	PASS
Extreme (-20℃)		16.06	4.49	0.00854	0.00239	PASS
Extreme (-30℃)		17.49	14.53	0.00930	0.00773	PASS
25℃	LV	12.05	13.84	0.00641	0.00736	PASS
	HV	16.35	3.36	0.00870	0.00179	PASS

LTE Band 2						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	2.05	4.69	0.00109	0.00250	PASS
Extreme (55℃)		10.36	14.14	0.00551	0.00752	PASS
Extreme (50℃)		7.95	9.34	0.00423	0.00497	PASS
Extreme (40℃)		12.16	6.71	0.00647	0.00357	PASS
Extreme (30℃)		12.48	10.27	0.00664	0.00546	PASS
Extreme (20℃)		6.60	7.89	0.00351	0.00420	PASS
Extreme (10℃)		10.75	14.67	0.00572	0.00780	PASS
Extreme (0℃)		4.10	1.26	0.00218	0.00067	PASS
Extreme (-10℃)		16.79	2.39	0.00893	0.00127	PASS
Extreme (-20℃)		3.61	13.20	0.00192	0.00702	PASS
Extreme (-30℃)		6.18	13.58	0.00329	0.00722	PASS
25℃	LV	9.48	3.43	0.00504	0.00183	PASS
	HV	10.15	1.65	0.00540	0.00088	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	10.27	6.92	0.00546	0.00368	PASS
Extreme (55℃)		3.07	17.62	0.00163	0.00937	PASS
Extreme (50℃)		8.59	6.67	0.00457	0.00355	PASS
Extreme (40℃)		15.81	4.31	0.00841	0.00229	PASS
Extreme (30℃)		2.93	17.67	0.00156	0.00940	PASS
Extreme (20℃)		6.03	11.50	0.00321	0.00612	PASS
Extreme (10℃)		9.66	10.40	0.00514	0.00553	PASS
Extreme (0℃)		2.55	9.48	0.00136	0.00504	PASS
Extreme (-10℃)		6.32	3.40	0.00336	0.00181	PASS
Extreme (-20℃)		8.58	3.80	0.00456	0.00202	PASS
Extreme (-30℃)		17.63	13.12	0.00938	0.00698	PASS
25℃	LV	9.90	8.13	0.00527	0.00432	PASS
	HV	8.52	13.89	0.00453	0.00739	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	4.10	11.52	0.00218	0.00613	PASS
Extreme (55℃)		6.60	13.90	0.00351	0.00739	PASS



Extreme (50℃)		8.71	16.64	0.00463	0.00885	PASS
Extreme (40℃)		7.04	11.75	0.00375	0.00625	PASS
Extreme (30℃)		6.08	4.22	0.00324	0.00224	PASS
Extreme (20℃)		17.81	1.20	0.00947	0.00064	PASS
Extreme (10℃)		6.07	9.82	0.00323	0.00522	PASS
Extreme (0℃)		11.96	6.84	0.00636	0.00364	PASS
Extreme (-10℃)		17.85	6.31	0.00949	0.00336	PASS
Extreme (-20℃)		9.78	9.57	0.00520	0.00509	PASS
Extreme (-30℃)		5.18	9.00	0.00275	0.00479	PASS
25℃	LV	7.20	6.39	0.00383	0.00340	PASS
	HV	2.19	3.82	0.00117	0.00203	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	9.95	16.17	0.00529	0.00860	PASS
Extreme (55℃)		16.74	16.29	0.00890	0.00867	PASS
Extreme (50℃)		16.61	9.48	0.00884	0.00504	PASS
Extreme (40℃)		16.68	3.35	0.00887	0.00178	PASS
Extreme (30℃)		2.02	9.36	0.00107	0.00498	PASS
Extreme (20℃)		15.51	16.09	0.00825	0.00856	PASS
Extreme (10℃)		12.42	10.64	0.00660	0.00566	PASS
Extreme (0℃)		13.95	14.70	0.00742	0.00782	PASS
Extreme (-10℃)		7.71	3.96	0.00410	0.00211	PASS
Extreme (-20℃)		17.00	6.06	0.00904	0.00322	PASS
Extreme (-30℃)		7.22	2.03	0.00384	0.00108	PASS
25℃	LV	16.42	16.26	0.00873	0.00865	PASS
	HV	8.76	12.84	0.00466	0.00683	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	12.08	17.68	0.00643	0.00940	PASS
Extreme (55℃)		13.77	11.76	0.00733	0.00626	PASS
Extreme (50℃)		4.35	15.03	0.00231	0.00799	PASS
Extreme (40℃)		4.33	7.08	0.00230	0.00377	PASS
Extreme (30℃)		15.71	10.39	0.00835	0.00553	PASS
Extreme (20℃)		1.28	4.70	0.00068	0.00250	PASS
Extreme (10℃)		9.19	17.37	0.00489	0.00924	PASS
Extreme (0℃)		13.81	3.93	0.00734	0.00209	PASS
Extreme (-10℃)		14.29	2.06	0.00760	0.00110	PASS
Extreme (-20℃)		10.08	16.14	0.00536	0.00859	PASS



Extreme (-30℃)		2.26	4.43	0.00120	0.00236	PASS
25℃	LV	14.34	14.79	0.00763	0.00787	PASS
	HV	10.86	11.93	0.00578	0.00635	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	9.31	2.75	0.00495	0.00146	PASS
Extreme (55℃)		15.80	1.55	0.00841	0.00083	PASS
Extreme (50℃)		4.23	6.96	0.00225	0.00370	PASS
Extreme (40℃)		11.84	8.38	0.00630	0.00446	PASS
Extreme (30℃)		4.05	3.12	0.00215	0.00166	PASS
Extreme (20℃)		16.84	2.59	0.00896	0.00138	PASS
Extreme (10℃)		4.44	6.37	0.00236	0.00339	PASS
Extreme (0℃)		3.03	11.21	0.00161	0.00596	PASS
Extreme (-10℃)		17.99	14.13	0.00957	0.00751	PASS
Extreme (-20℃)		2.67	13.92	0.00142	0.00741	PASS
Extreme (-30℃)		16.95	3.48	0.00902	0.00185	PASS
25℃	LV	13.33	5.87	0.00709	0.00312	PASS
	HV	13.89	1.61	0.00739	0.00086	PASS

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

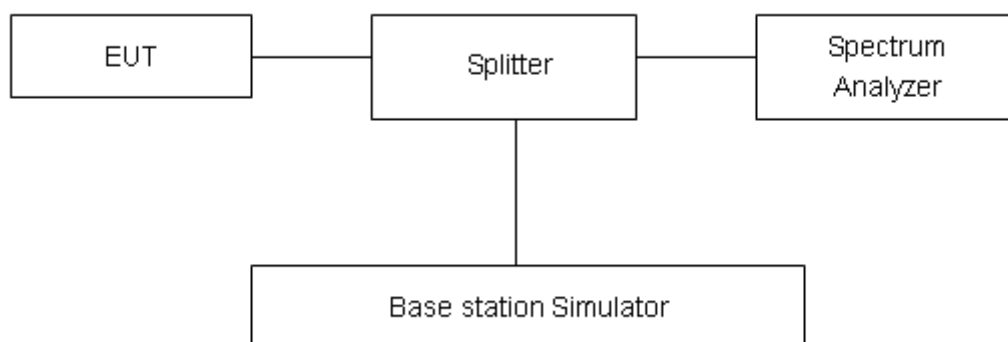

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.




Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB



Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

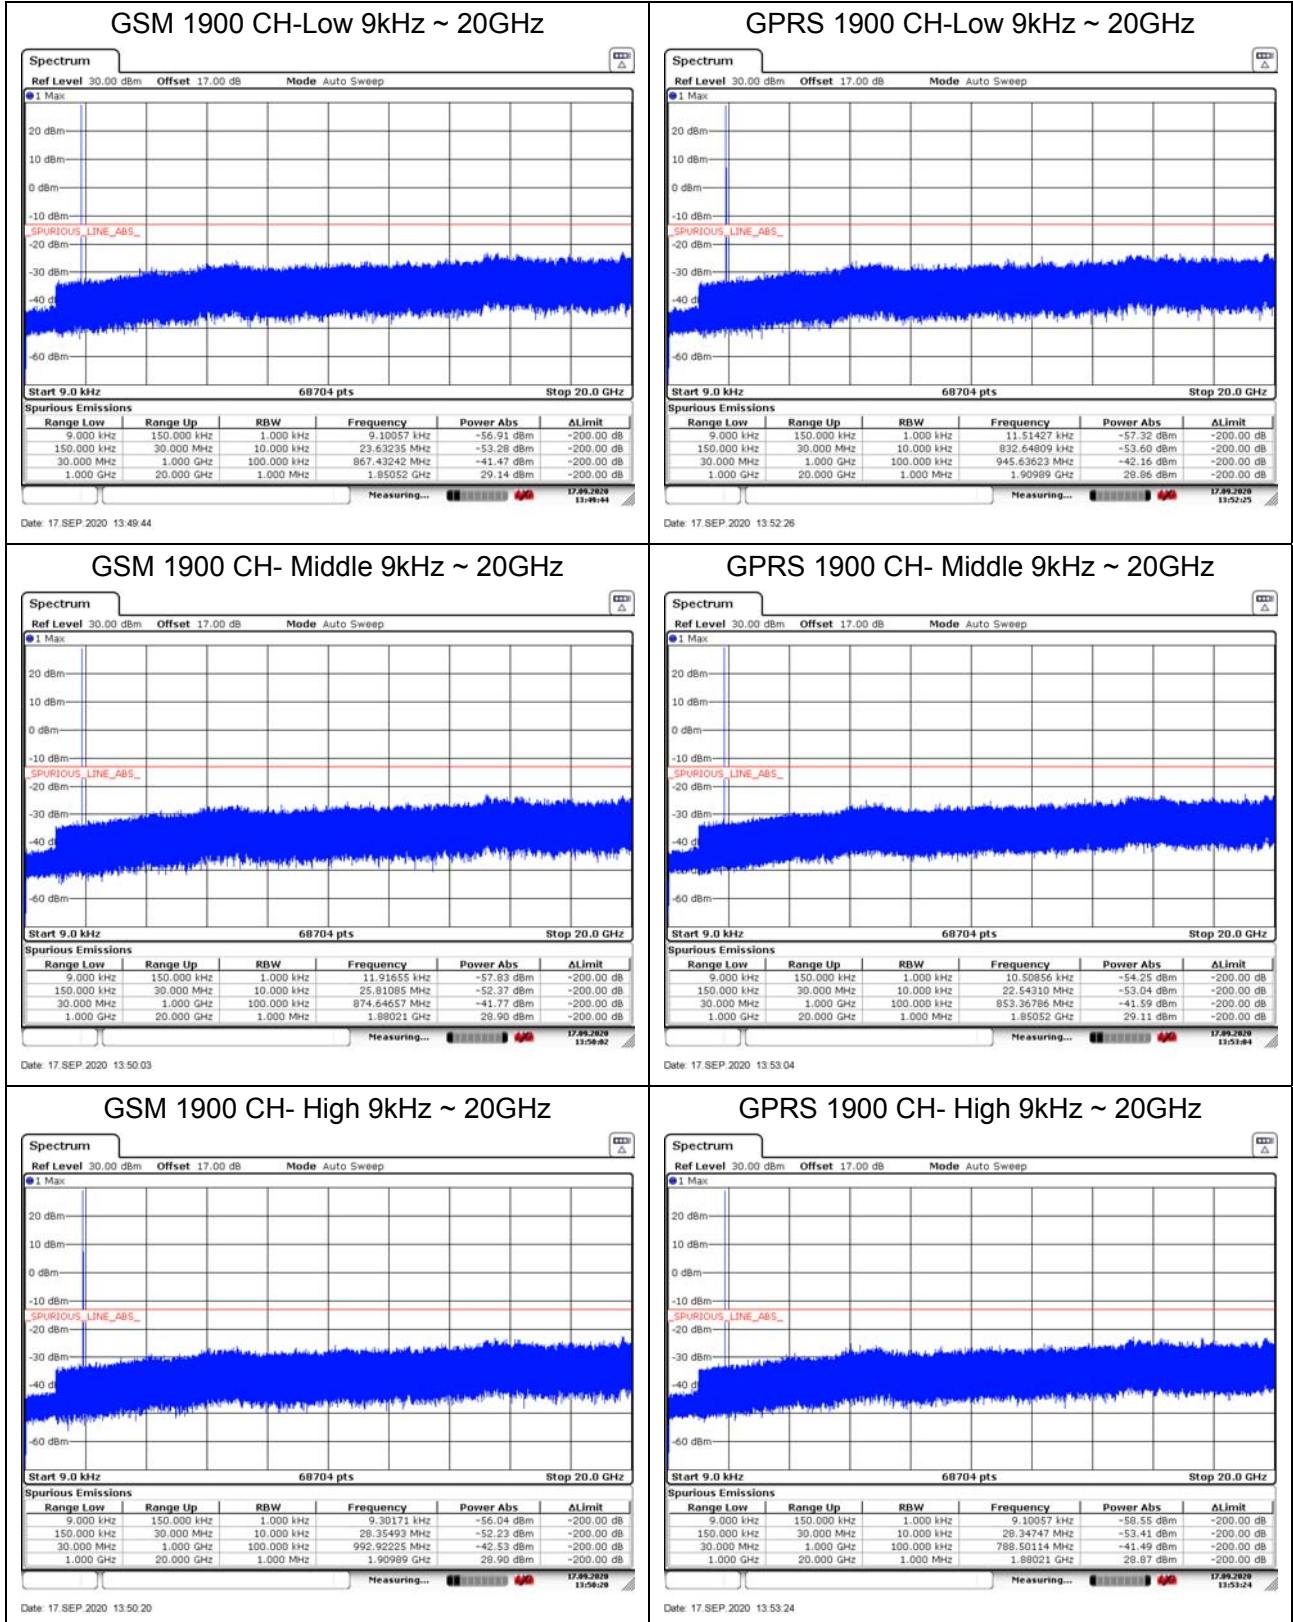




EGPRS 1900 CH-Low 9kHz ~ 20GHz

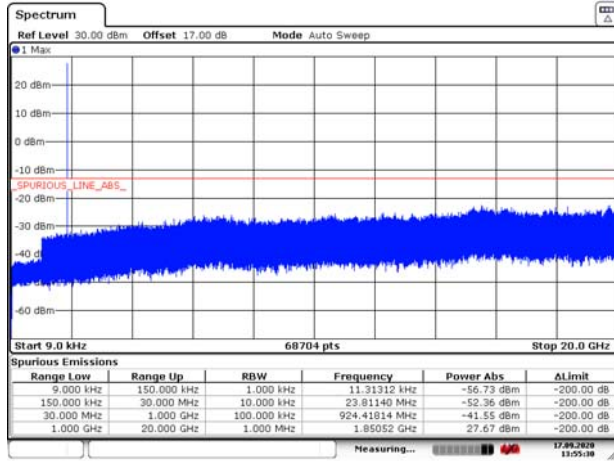


Date: 17 SEP 2020 13:55:30

WCDMA Band II CH-Low 9kHz ~ 20GHz

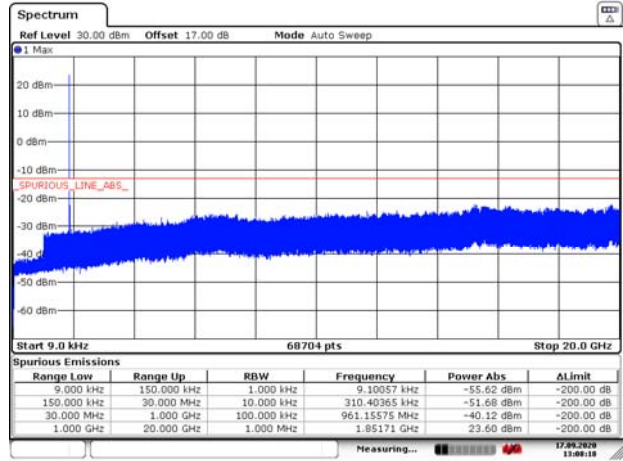


Date: 17 SEP 2020 13:08:18

EGPRS 1900 CH- Middle 9kHz ~ 20GHz

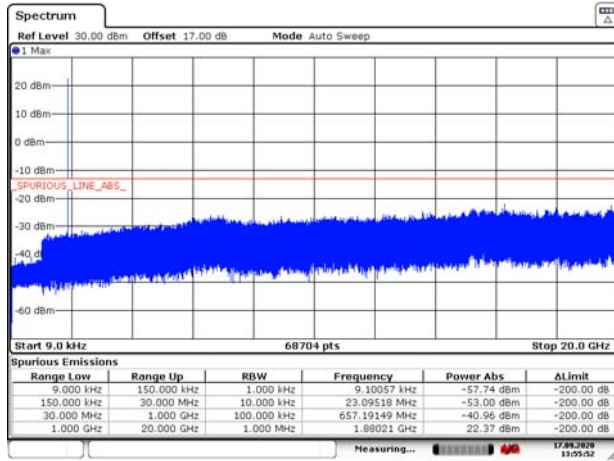


Date: 17 SEP 2020 13:55:52

WCDMA Band II CH- Middle 9kHz ~ 20GHz

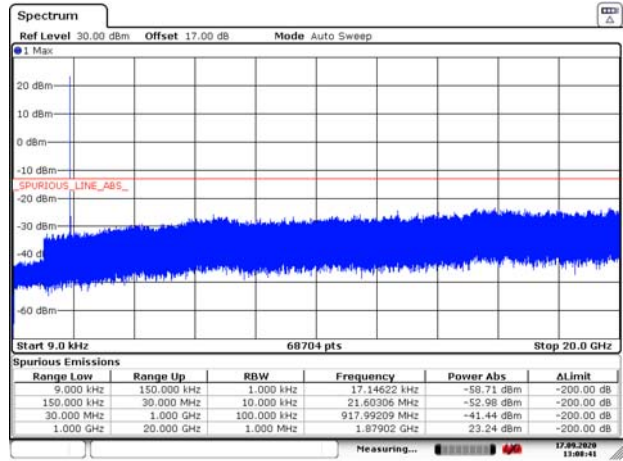


Date: 17 SEP 2020 13:08:41

EGPRS 1900 CH- High 9kHz ~ 20GHz

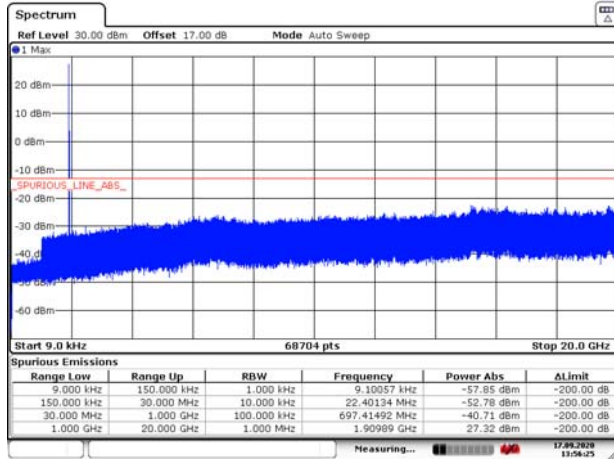


Date: 17 SEP 2020 13:56:25

WCDMA Band II CH- High 9kHz ~ 20GHz

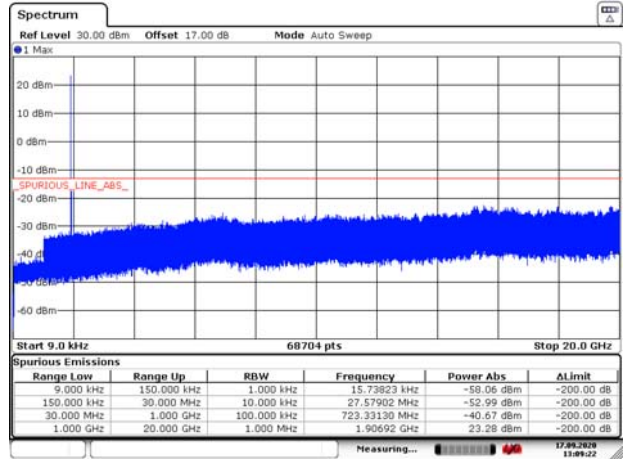


Date: 17 SEP 2020 13:09:22


LTE Band 2 1.4MHz CH-Low 9kHz~20GHz

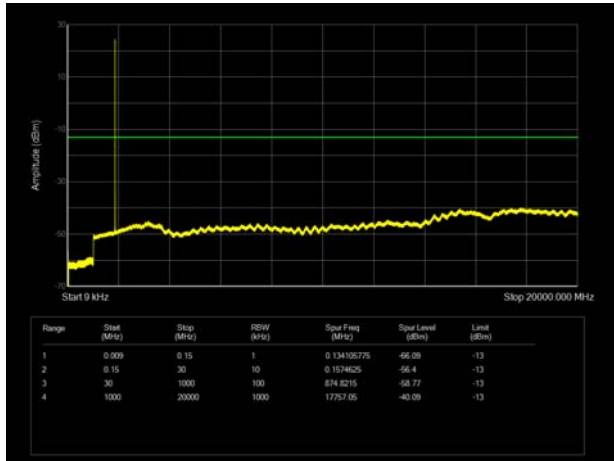


LTE Band 2 3MHz CH-Low 9kHz~20GHz

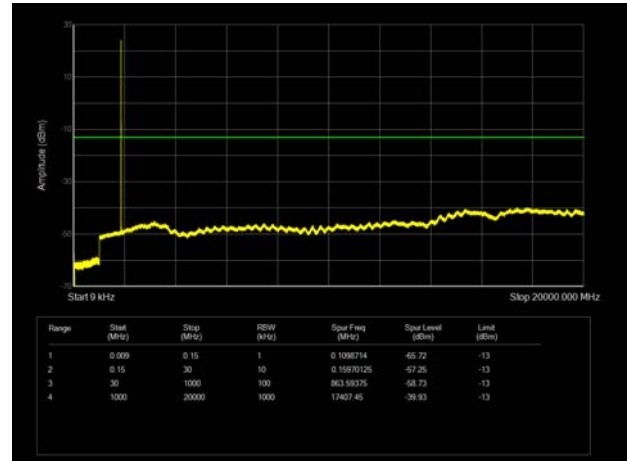


LTE Band 2 1.4MHz CH-Middle 9kHz~20GHz

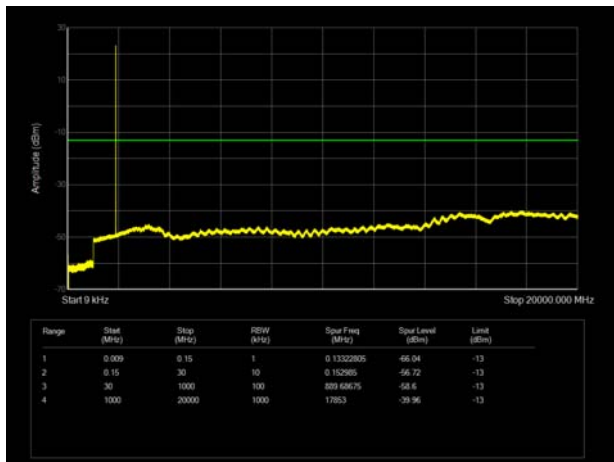


LTE Band 2 3MHz CH-Middle 9kHz~20GHz

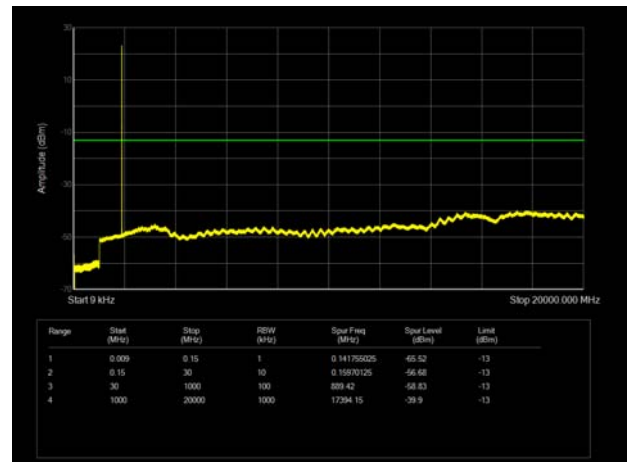


LTE Band 2 1.4MHz CH-High 9kHz~20GHz

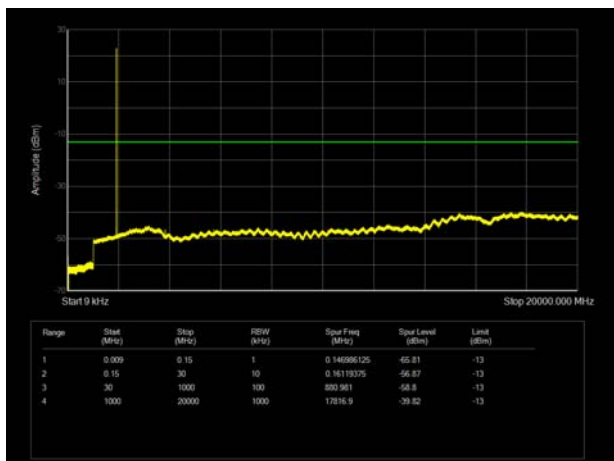


LTE Band 2 3MHz CH-High 9kHz~20GHz

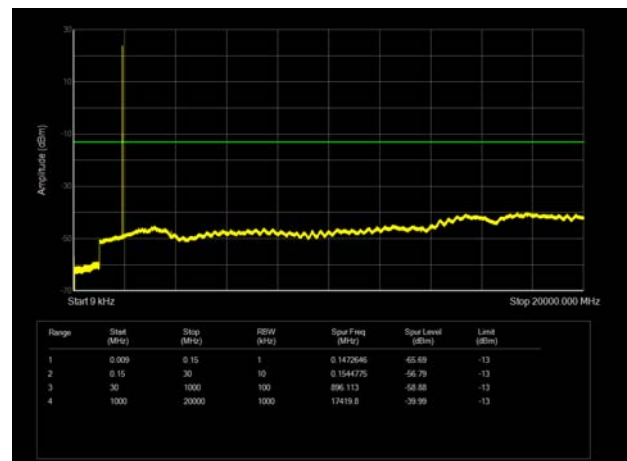


LTE Band 2 5MHz CH-Low 9kHz~20GHz

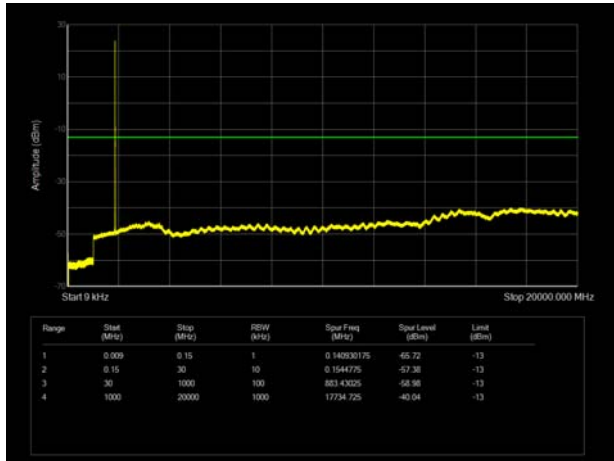


LTE Band 2 10MHz CH-Low 9kHz~20GHz

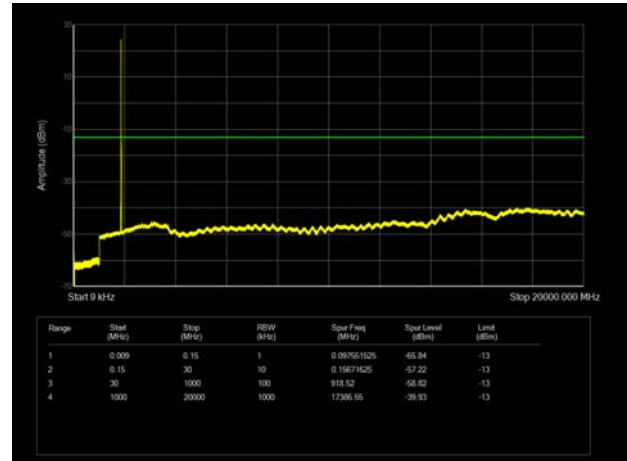


LTE Band 2 5MHz CH-Middle 9kHz~20GHz

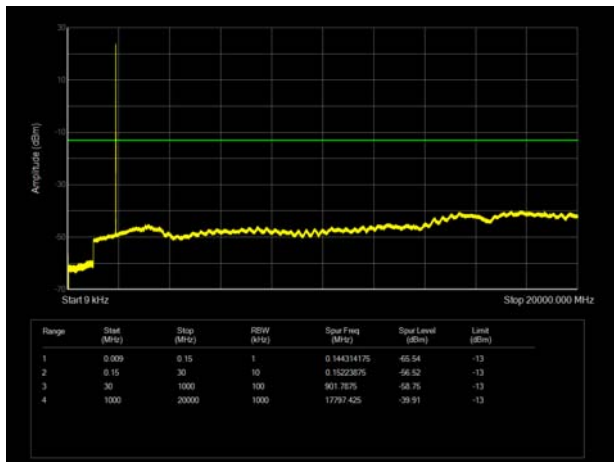


LTE Band 2 10MHz CH-Middle 9kHz~20GHz

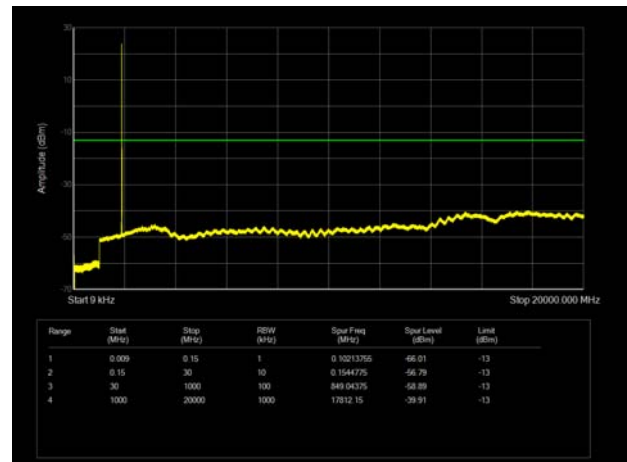


LTE Band 2 5MHz CH-High 9kHz~20GHz

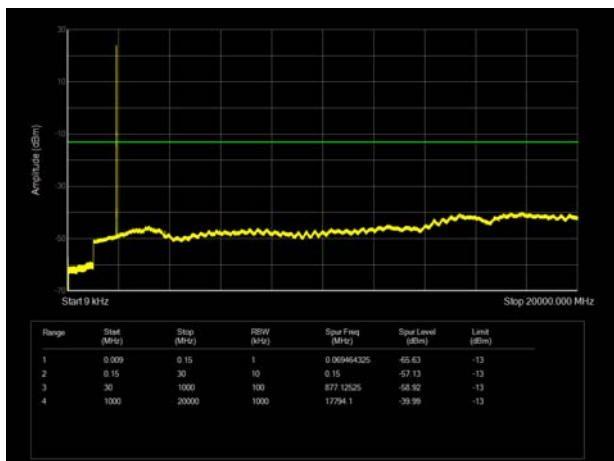


LTE Band 2 10MHz CH-High 9kHz~20GHz

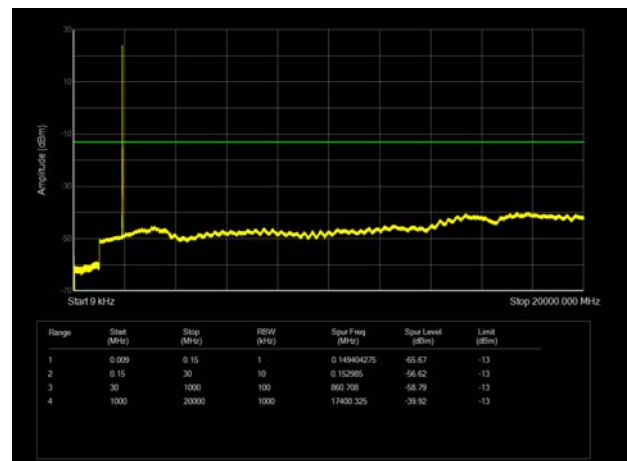


LTE Band 2 15MHz CH-Low 9kHz~20GHz

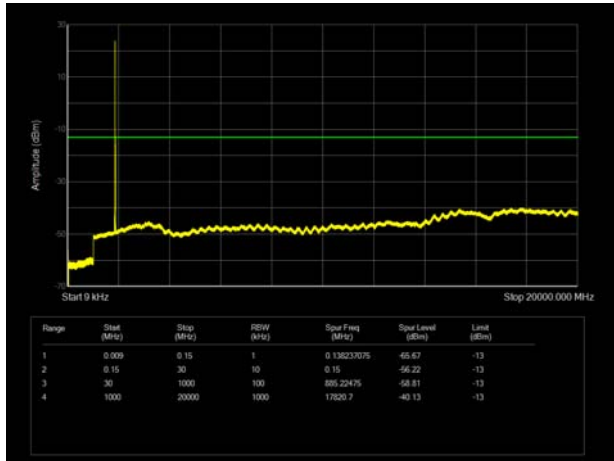


LTE Band 2 20MHz CH-Low 9kHz~20GHz

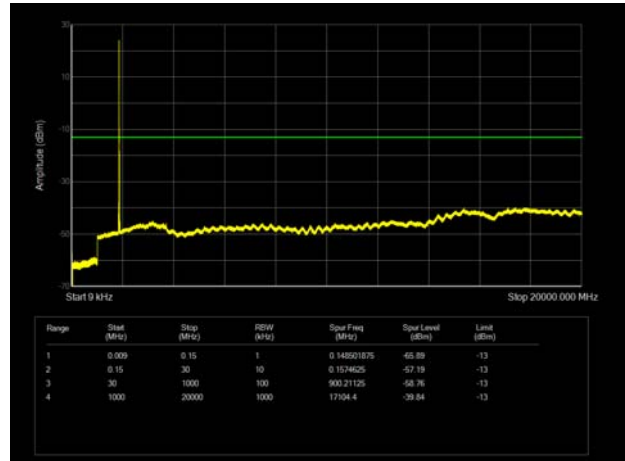


LTE Band 2 15MHz CH-Middle 9kHz~20GHz

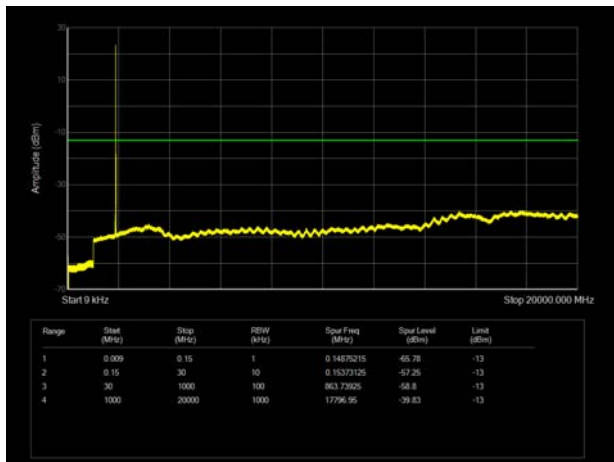


LTE Band 2 20MHz CH-Middle 9kHz~20GHz

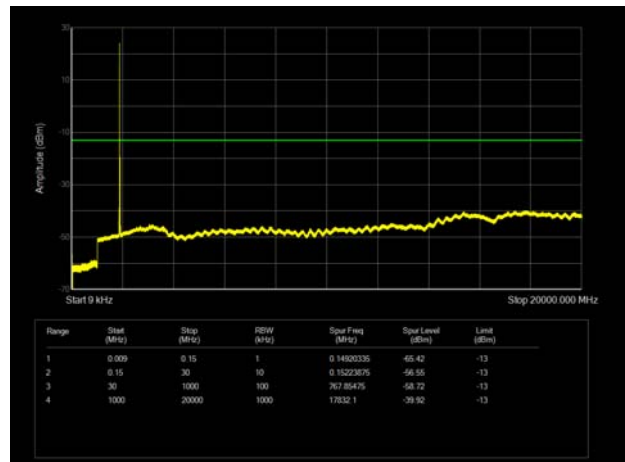

LTE Band 2 15MHz CH-High 9kHz~20GHz

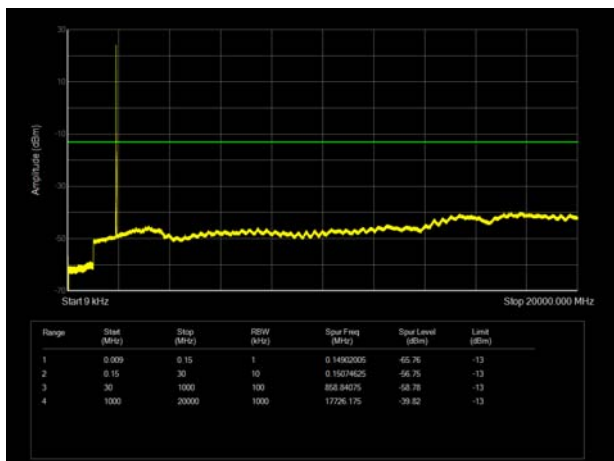

LTE Band 2 20MHz CH-High 9kHz~20GHz

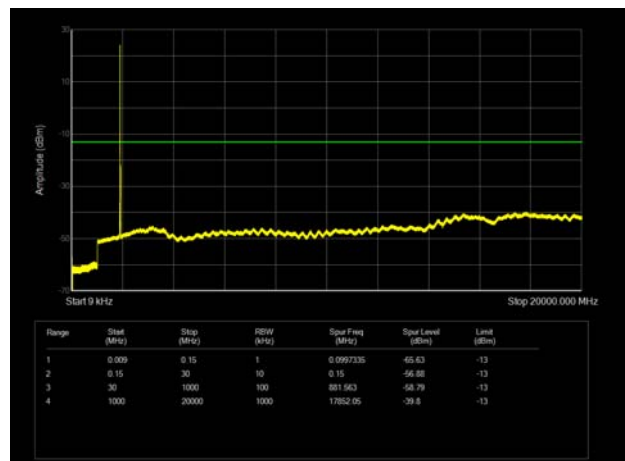

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz-150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

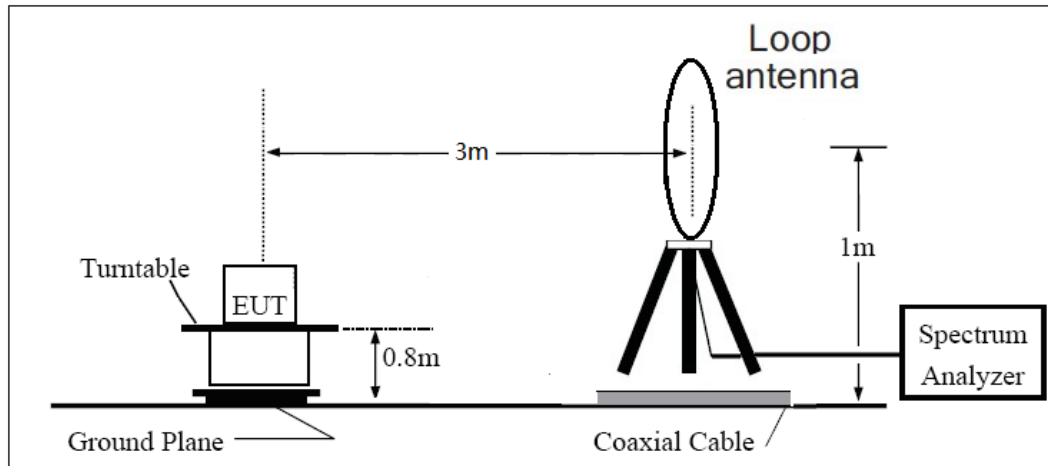

30MHz ~ 1GHz

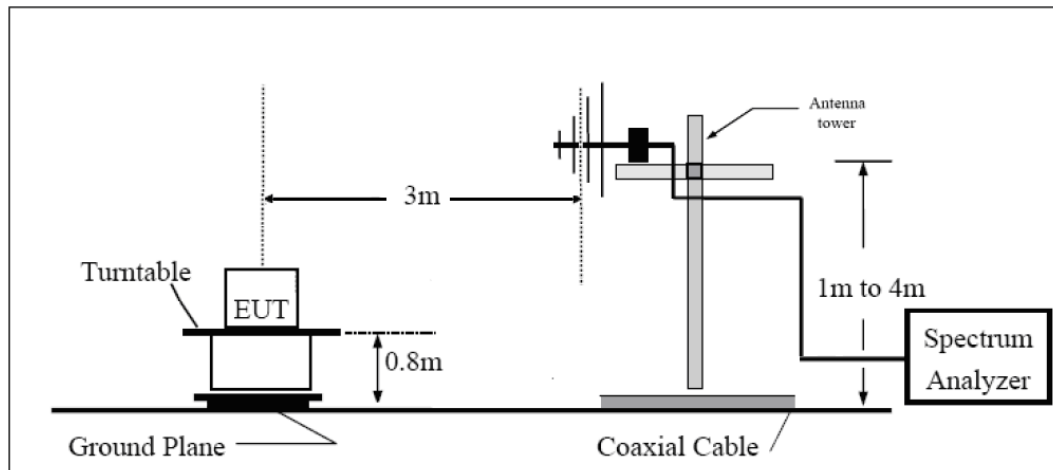

Above 1GHz

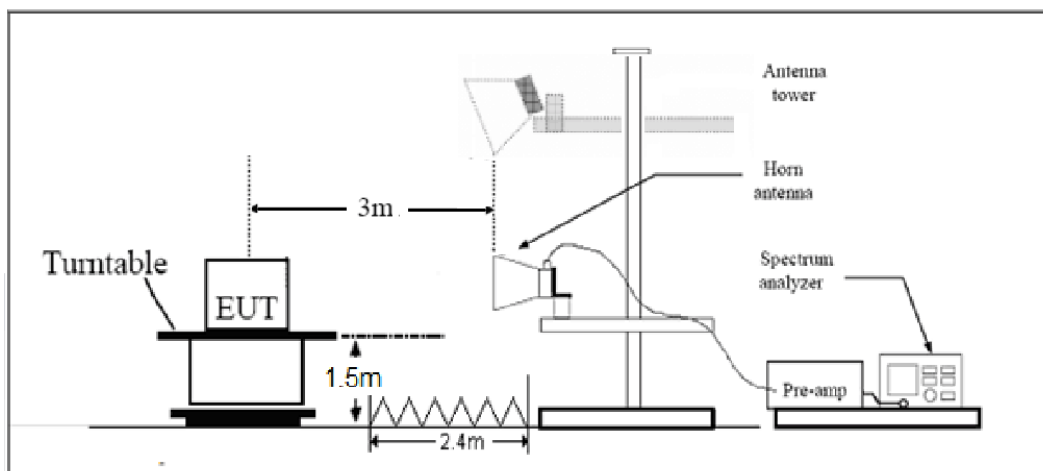



Note: Area side: 2.4mX3.6m

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Main Antenna

GSM 1900 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-59.37	5.10	11.05	Horizontal	-53.42	-13.00	40.42	90
3	5640.00	-61.56	5.42	12.65	Horizontal	-54.33	-13.00	41.33	180
4	7520.00	-56.25	6.70	13.85	Horizontal	-49.10	-13.00	36.10	0
5	9400.00	-54.50	7.01	14.75	Horizontal	-46.76	-13.00	33.76	135
6	11280.00	-52.14	7.48	15.95	Horizontal	-43.67	-13.00	30.67	225
7	13160.00	-52.51	7.51	16.55	Horizontal	-43.47	-13.00	30.47	45
8	15040.00	-51.85	8.24	15.35	Horizontal	-44.74	-13.00	31.74	0
9	16920.00	-48.33	8.41	14.95	Horizontal	-41.79	-13.00	28.79	315
10	18800.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-61.41	5.10	11.05	Horizontal	-55.46	-13.00	42.46	0
3	5640.00	-60.62	5.42	12.65	Horizontal	-53.39	-13.00	40.39	270
4	7520.00	-56.24	6.70	13.85	Horizontal	-49.09	-13.00	36.09	135
5	9400.00	-54.99	7.01	14.75	Horizontal	-47.25	-13.00	34.25	45
6	11280.00	-51.83	7.48	15.95	Horizontal	-43.36	-13.00	30.36	225
7	13160.00	-52.50	7.51	16.55	Horizontal	-43.46	-13.00	30.46	0
8	15040.00	-51.58	8.24	15.35	Horizontal	-44.47	-13.00	31.47	135
9	16920.00	-48.15	8.41	14.95	Horizontal	-41.61	-13.00	28.61	315
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.00	-62.69	5.10	11.05	Horizontal	-56.74	-13.00	43.74	0
3	5638.88	-61.34	5.42	12.65	Horizontal	-54.11	-13.00	41.11	315
4	7520.00	-56.64	6.70	13.85	Horizontal	-49.49	-13.00	36.49	45
5	9400.00	-54.84	7.01	14.75	Horizontal	-47.10	-13.00	34.10	225
6	11280.00	-52.97	7.48	15.95	Horizontal	-44.50	-13.00	31.50	90
7	13160.00	-52.03	7.51	16.55	Horizontal	-42.99	-13.00	29.99	180
8	15040.00	-51.76	8.24	15.35	Horizontal	-44.65	-13.00	31.65	135
9	16920.00	-48.96	8.41	14.95	Horizontal	-42.42	-13.00	29.42	90
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.63	-61.27	5.10	11.05	Horizontal	-55.32	-13.00	42.32	45
3	5633.63	-59.87	5.42	12.65	Horizontal	-52.64	-13.00	39.64	0
4	7520.00	-56.10	6.70	13.85	Horizontal	-48.95	-13.00	35.95	225
5	9400.00	-54.10	7.01	14.75	Horizontal	-46.36	-13.00	33.36	270
6	11280.00	-52.89	7.48	15.95	Horizontal	-44.42	-13.00	31.42	180
7	13160.00	-52.85	7.51	16.55	Horizontal	-43.81	-13.00	30.81	225
8	15040.00	-51.34	8.24	15.35	Horizontal	-44.23	-13.00	31.23	135
9	16920.00	-47.97	8.41	14.95	Horizontal	-41.43	-13.00	28.43	0
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3742.13	-61.61	5.10	11.05	Horizontal	-55.66	-13.00	42.66	45
3	5613.38	-60.96	5.42	12.65	Horizontal	-53.73	-13.00	40.73	90
4	7484.63	-56.72	6.70	13.85	Horizontal	-49.57	-13.00	36.57	225
5	9400.00	-54.49	7.01	14.75	Horizontal	-46.75	-13.00	33.75	315
6	11280.00	-52.65	7.48	15.95	Horizontal	-44.18	-13.00	31.18	180
7	13160.00	-52.59	7.51	16.55	Horizontal	-43.55	-13.00	30.55	90
8	15040.00	-52.50	8.24	15.35	Horizontal	-45.39	-13.00	32.39	45
9	16920.00	-48.58	8.41	14.95	Horizontal	-42.04	-13.00	29.04	135
10	18800.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

Second Antenna

GSM 1900 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-61.14	5.10	11.05	Horizontal	-55.19	-13.00	42.19	90
3	5640.00	-61.78	5.42	12.65	Horizontal	-54.55	-13.00	41.55	45
4	7520.00	-56.34	6.70	13.85	Horizontal	-49.19	-13.00	36.19	0
5	9400.00	-55.05	7.01	14.75	Horizontal	-47.31	-13.00	34.31	0
6	11280.00	-51.16	7.48	15.95	Horizontal	-42.69	-13.00	29.69	45
7	13160.00	-53.69	7.51	16.55	Horizontal	-44.65	-13.00	31.65	90
8	15040.00	-52.52	8.24	15.35	Horizontal	-45.41	-13.00	32.41	45
9	16920.00	-49.25	8.41	14.95	Horizontal	-42.71	-13.00	29.71	315
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-61.86	5.10	11.05	Horizontal	-55.91	-13.00	42.91	0
3	5640.00	-60.72	5.42	12.65	Horizontal	-53.49	-13.00	40.49	45
4	7520.00	-55.73	6.70	13.85	Horizontal	-48.58	-13.00	35.58	90
5	9400.00	-54.12	7.01	14.75	Horizontal	-46.38	-13.00	33.38	135
6	11280.00	-51.16	7.48	15.95	Horizontal	-42.69	-13.00	29.69	270
7	13160.00	-51.77	7.51	16.55	Horizontal	-42.73	-13.00	29.73	45
8	15040.00	-50.66	8.24	15.35	Horizontal	-43.55	-13.00	30.55	0
9	16920.00	-48.69	8.41	14.95	Horizontal	-42.15	-13.00	29.15	90
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.00	-61.76	5.10	11.05	Horizontal	-55.81	-13.00	42.81	135
3	5638.88	-61.12	5.42	12.65	Horizontal	-53.89	-13.00	40.89	180
4	7520.00	-57.28	6.70	13.85	Horizontal	-50.13	-13.00	37.13	45
5	9400.00	-54.87	7.01	14.75	Horizontal	-47.13	-13.00	34.13	225
6	11280.00	-51.36	7.48	15.95	Horizontal	-42.89	-13.00	29.89	90
7	13160.00	-53.69	7.51	16.55	Horizontal	-44.65	-13.00	31.65	45
8	15040.00	-51.53	8.24	15.35	Horizontal	-44.42	-13.00	31.42	315
9	16920.00	-48.97	8.41	14.95	Horizontal	-42.43	-13.00	29.43	90
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.63	-61.85	5.10	11.05	Horizontal	-55.90	-13.00	42.90	45
3	5633.63	-61.63	5.42	12.65	Horizontal	-54.40	-13.00	41.40	135
4	7520.00	-57.29	6.70	13.85	Horizontal	-50.14	-13.00	37.14	180
5	9400.00	-55.95	7.01	14.75	Horizontal	-48.21	-13.00	35.21	90
6	11280.00	-51.77	7.48	15.95	Horizontal	-43.30	-13.00	30.30	45
7	13160.00	-53.21	7.51	16.55	Horizontal	-44.17	-13.00	31.17	45
8	15040.00	-51.10	8.24	15.35	Horizontal	-43.99	-13.00	30.99	315
9	16920.00	-49.14	8.41	14.95	Horizontal	-42.60	-13.00	29.60	90
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3742.13	-62.46	5.10	11.05	Horizontal	-56.51	-13.00	43.51	90
3	5613.38	-62.04	5.42	12.65	Horizontal	-54.81	-13.00	41.81	45
4	7484.63	-56.46	6.70	13.85	Horizontal	-49.31	-13.00	36.31	135
5	9400.00	-55.36	7.01	14.75	Horizontal	-47.62	-13.00	34.62	180
6	11280.00	-53.72	7.48	15.95	Horizontal	-45.25	-13.00	32.25	225
7	13160.00	-53.14	7.51	16.55	Horizontal	-44.10	-13.00	31.10	45
8	15040.00	-51.15	8.24	15.35	Horizontal	-44.04	-13.00	31.04	90
9	16920.00	-48.67	8.41	14.95	Horizontal	-42.13	-13.00	29.13	315
10	18800.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2020-05-17	2021-05-16
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****