



TEST REPORT

No. I19Z61444-WMD03

for

Micromax Informatics Ltd

LTE Mobile Phone

Model Name: T5542

FCC ID: 2AU5XT5542

with

Hardware Version: MMX_T5542_V3.0

Software Version: MMX_T5542_SW_V03_20191106

Issued Date: 2019-12-05

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I19Z61444-WMD03	Rev.0	1 st edition	2019-11-15
I19Z61444-WMD03	Rev.1	2 nd edition Replace Smart phone with LTE Mobile Phone	2019-12-05

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATA	5
1.5. SIGNATURE.....	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT.....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULT	10
6.1. SUMMARY OF TEST RESULTS	10
7. TEST EQUIPMENT UTILIZED	13
ANNEX A: MEASUREMENT RESULTS	14
A.1 OUTPUT POWER	14
A.2 EMISSION LIMIT	48
A.3 FREQUENCY STABILITY	60
A.4 OCCUPIED BANDWIDTH.....	65
A.5 EMISSION BANDWIDTH	103
A.6 BAND EDGE COMPLIANCE.....	141
A.7 CONDUCTED SPURIOUS EMISSION	176
A.8 PEAK-TO-AVERAGE POWER RATIO	182
ANNEX B: ACCREDITATION CERTIFICATE	184

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL (Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

1.4. Project data

Testing Start Date: 2019-09-12

Testing End Date: 2019-11-15

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Micromax Informatics Ltd
Address /Post: 288A Udyog Vihar Phase 4 Gurgaon 122015
Contact: Mr. Sunil Joon
Email: sunil@micromaxinfo.com
Telephone: +91 8447446444
Fax:

2.2. Manufacturer Information

Company Name: Micromax Informatics Ltd
Address /Post: 288A Udyog Vihar Phase 4 Gurgaon 122015
Contact: Mr. Sunil Joon
Email: sunil@micromaxinfo.com
Telephone: +91 8447446444
Fax:

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	LTE Mobile Phone
Model Name	T5542
FCC ID	2AU5XT5542
Antenna	Embedded
Output power	29.16dBm maximum EIRP measured for GPRS1900
Extreme vol. Limits	3.5VDC to 4.3VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT56a	358849109011302	MMX_T5542_ V3.0	MMX_T5542_SW_V03_ 20191106	2019-10-14
UT48b	358849109009561	MMX_T5542_ V3.0	MMX_T5542_SW_V03_ 20191106	2019-11-13
UT57a	358849109007466	MMX_T5542_ V3.0	MMX_T5542_SW_V03_ 20191106	2019-10-14

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE1	
Model	Li-Polymer
Manufacturer	NINGBO VEKEN BATTERY CO., LTD.
Capacitance	4000mAh

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-18 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-18 Edition
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI/TIA-102.CAAA -E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. LABORATORY ENVIRONMENT

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

6. SUMMARY OF TEST RESULT

6.1. Summary of test results

LTE Band 7

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 12

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 25

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	24.238	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	24.238	P
6	Band Edge Compliance	24.238	P
7	Conducted Spurious Emission	24.238	P
8	Peak-to-Average Power Ratio	24.232	P

LTE Band 26(814MHz~824MHz)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	90.635	P
2	Emission Limit	90.691	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	2.1049	P
6	Band Edge Compliance	90.691	P
7	Conducted Spurious Emission	90.691	P

LTE Band 26(824MHz~849MHz)

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	22.917	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	22.917	P
6	Band Edge Compliance	22.917	P
7	Conducted Spurious Emission	22.917	P

LTE Band 41

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 66

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 71

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

7. Test Equipment Utilized

NO.	Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
1	Universal Radio Communication Tester	CMU200	108646	R&S	2020-01-03	1 year
2	Spectrum Analyzer	FSU26	200030	R&S	2020-06-03	1 year
3	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 year
4	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-11-20	1 year
5	EMI Antenna	3117	00058889	ETS-Lindgren	2020-02-02	1 year
6	EMI Antenna	3117	00119024	ETS-Lindgren	2020-02-25	1 year
7	EMI Antenna	9117	167	Schwarzbeck	2020-05-27	1 year
8	Signal Generator	N5183A	MY49060052	R&S	2020-06-24	1 year
9	Test Receiver	E4440A	MY48250642	Agilent	2020-03-18	1 year
10	Universal Radio Communication Tester	CMW500	143008	R&S	2019-11-26	1 year

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
5MHz	1 RB high	2567.5	23.38	22.15
		2535	23.55	22.36
		2502.5	23.37	21.99
	1 RB low	2567.5	23.56	22.04
		2535	23.65	22.32
		2502.5	23.37	22.29
	50% RB mid	2567.5	22.45	21.40
		2535	22.60	21.52
		2502.5	22.57	21.41
	100% RB	2567.5	22.27	21.20
		2535	22.53	21.67
		2502.5	22.52	21.40
10MHz	1 RB high	2565	23.70	22.64
		2535	23.70	22.17
		2505	23.77	22.64
	1 RB low	2565	23.97	22.44
		2535	23.58	21.89
		2505	23.55	22.55
	50% RB mid	2565	22.53	21.48
		2535	22.72	21.74
		2505	22.64	21.59

	100% RB	2565	22.38	21.48
		2535	22.54	21.57
		2505	22.65	21.52
15MHz	1 RB high	2562.5	23.45	22.56
		2535	23.45	22.94
		2507.5	23.74	22.83
	1 RB low	2562.5	23.49	22.54
		2535	23.63	22.73
		2507.5	23.83	22.70
	50% RB mid	2562.5	22.51	21.59
		2535	22.64	21.59
		2507.5	22.67	21.41
	100% RB	2562.5	22.40	21.47
		2535	22.57	21.51
		2507.5	22.72	21.54
20MHz	1 RB high	2560	23.54	22.15
		2535	23.27	22.36
		2510	23.18	22.06
	1 RB low	2560	23.57	22.30
		2535	23.41	22.44
		2510	23.32	21.86
	50% RB mid	2560	22.54	21.49
		2535	22.52	21.57
		2510	22.63	21.54
	100% RB	2560	22.46	21.45
		2535	22.43	21.40
		2510	22.64	21.64

LTE band 12

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	715.3	22.96	21.96
		707.5	23.45	21.89
		699.7	22.75	22.31
	1 RB low	715.3	23.07	22.10
		707.5	22.95	21.85
		699.7	23.17	22.24
	50% RB mid	715.3	22.87	22.17
		707.5	22.84	21.96
		699.7	23.03	21.94
	100% RB	715.3	22.17	21.07
		707.5	22.01	21.20
		699.7	22.02	21.00
3MHz	1 RB high	714.5	22.92	22.28
		707.5	22.83	22.29
		700.5	23.05	22.10
	1 RB low	714.5	23.07	22.22
		707.5	22.87	22.05
		700.5	23.16	22.10
	50% RB mid	714.5	22.21	21.34
		707.5	22.09	21.25
		700.5	21.96	21.11
	100% RB	714.5	22.10	21.06
		707.5	22.13	21.09
		700.5	22.03	20.87
5MHz	1 RB high	713.5	23.02	21.62
		707.5	22.87	22.01
		701.5	23.07	21.87
	1 RB low	713.5	23.08	21.51
		707.5	23.14	21.99
		701.5	23.03	21.96
	50% RB mid	713.5	22.06	21.34
		707.5	22.19	21.02
		701.5	22.14	21.18
	100% RB	713.5	22.07	21.25
		707.5	22.13	21.05
		701.5	22.10	21.19
10MHz	1 RB high	711.0	22.90	22.24
		707.5	23.06	22.10

	1 RB low	704.0	23.08	22.27
		711.0	22.84	22.01
		707.5	23.00	21.99
		704.0	22.86	22.09
	50% RB mid	711.0	22.17	21.31
		707.5	22.16	21.14
		704.0	22.17	21.17
	100% RB	711.0	22.32	21.19
		707.5	22.11	21.03
		704.0	22.18	21.16

LTE band 25

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1914.3	22.60	22.47
		1882.5	22.71	22.27
		1850.7	23.17	22.57
	1 RB low	1914.3	23.39	22.54
		1882.5	23.35	22.84
		1850.7	23.55	22.66
	50% RB mid	1914.3	23.60	22.25
		1882.5	23.59	22.70
		1850.7	23.64	22.27
	100% RB	1914.3	22.42	21.64
		1882.5	22.52	21.65
		1850.7	22.45	21.52
3MHz	1 RB high	1913.5	23.02	22.88
		1882.5	23.05	22.75
		1851.5	23.03	22.06
	1 RB low	1913.5	23.78	22.71
		1882.5	23.44	22.77
		1851.5	23.26	22.90
	50% RB mid	1913.5	22.51	21.61
		1882.5	22.50	21.69
		1851.5	22.38	21.43
	100% RB	1913.5	22.49	21.50
		1882.5	22.49	21.59
		1851.5	22.42	21.63
5MHz	1 RB high	1912.5	23.20	22.26
		1882.5	23.33	22.14
		1852.5	23.46	22.30
	1 RB low	1912.5	23.58	22.18
		1882.5	23.45	21.94
		1852.5	23.65	22.41
	50% RB mid	1912.5	22.57	21.60
		1882.5	22.70	21.54
		1852.5	22.63	21.68
	100% RB	1912.5	22.64	21.89
		1882.5	22.66	21.68
		1852.5	22.47	21.42
10MHz	1 RB high	1910.0	23.58	22.53
		1882.5	23.19	22.66

	1 RB low	1855.0	23.09	22.91
		1910.0	23.05	22.56
		1882.5	23.05	22.60
		1855.0	23.32	22.13
	50% RB mid	1910.0	22.31	21.84
		1882.5	22.55	21.60
		1855.0	22.32	21.60
	100% RB	1910.0	22.37	21.45
		1882.5	22.48	21.52
		1855.0	22.31	21.58
15MHz	1 RB high	1907.5	23.56	22.64
		1882.5	23.50	22.76
		1857.5	23.15	22.91
	1 RB low	1907.5	23.62	22.74
		1882.5	23.21	22.53
		1857.5	23.23	22.41
	50% RB mid	1907.5	22.49	21.60
		1882.5	22.51	21.59
		1857.5	22.55	21.48
	100% RB	1907.5	22.43	21.47
		1882.5	22.42	21.49
		1857.5	22.34	21.42
20MHz	1 RB high	1905.0	23.57	22.44
		1882.5	23.42	22.34
		1860.0	23.19	22.00
	1 RB low	1905.0	23.79	22.12
		1882.5	23.13	21.73
		1860.0	23.02	21.74
	50% RB mid	1905.0	22.52	21.57
		1882.5	22.51	21.53
		1860.0	22.53	21.54
	100% RB	1905.0	22.40	21.45
		1882.5	22.42	21.47
		1860.0	22.49	21.51

LTE band 26(814MHz~824MHz)

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	823.3	24.02	23.13
		819.0	23.93	23.36
		814.7	24.07	23.55
	1 RB low	823.3	24.00	23.15
		819.0	23.89	23.56
		814.7	24.26	23.33
	50% RB mid	823.3	24.11	23.19
		819.0	24.05	23.39
		814.7	24.24	23.07
	100% RB	823.3	23.09	22.12
		819.0	23.05	22.23
		814.7	23.24	22.28
3MHz	1 RB high	822.5	23.96	23.57
		819.0	23.94	23.47
		815.5	24.13	23.17
	1 RB low	822.5	24.11	23.64
		819.0	24.01	23.52
		815.5	24.11	23.21
	50% RB mid	822.5	23.18	22.34
		819.0	23.13	22.30
		815.5	23.22	22.35
	100% RB	822.5	23.14	22.18
		819.0	23.14	22.26
		815.5	23.10	22.33
5MHz	1 RB high	821.5	24.01	23.42
		819.0	23.90	23.37
		816.5	24.10	22.95
	1 RB low	821.5	24.00	23.27
		819.0	23.99	23.41
		816.5	24.00	23.23
	50% RB mid	821.5	23.20	22.42
		819.0	23.23	22.41
		816.5	23.26	22.14
	100% RB	821.5	23.10	22.17
		819.0	23.13	22.20
		816.5	23.12	22.39
10MHz	1 RB high	819.0	24.14	23.78
	1 RB low	819.0	24.04	23.71

	50% RB mid	819.0	24.00	23.78
	100% RB	819.0	24.23	23.93

LTE band 26(824MHz~849MHz)

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	23.95	23.04
		836.5	24.01	23.03
		824.7	24.34	23.29
	1 RB low	848.3	23.85	23.08
		836.5	23.90	23.07
		824.7	24.22	23.37
	50% RB mid	848.3	24.16	23.20
		836.5	24.00	23.37
		824.7	24.14	23.30
	100% RB	848.3	23.12	22.13
		836.5	23.06	22.06
		824.7	23.06	22.32
3MHz	1 RB high	847.5	23.79	23.33
		836.5	23.85	23.50
		825.5	24.05	23.09
	1 RB low	847.5	23.95	23.40
		836.5	24.10	23.31
		825.5	23.98	23.02
	50% RB mid	847.5	23.09	22.26
		836.5	23.07	22.31
		825.5	23.17	22.37
	100% RB	847.5	23.08	22.24
		836.5	23.02	22.14
		825.5	23.14	22.21
5MHz	1 RB high	846.5	24.01	23.16
		836.5	23.92	23.43
		826.5	23.94	22.91
	1 RB low	846.5	24.05	23.04
		836.5	23.93	23.35
		826.5	24.06	22.95
	50% RB mid	846.5	23.20	22.23
		836.5	23.11	22.09
		826.5	23.19	22.03
	100% RB	846.5	23.12	22.18
		836.5	23.04	22.19
		826.5	23.13	22.18
10MHz	1 RB high	844.0	24.06	23.78
		836.5	24.08	23.81

	1 RB low	829.0	24.13	23.13
		844.0	24.22	23.83
		836.5	24.12	23.74
		829.0	24.00	22.97
	50% RB mid	844.0	23.17	22.12
		836.5	23.16	22.14
		829.0	23.19	22.24
	100% RB	844.0	23.04	22.14
		836.5	23.06	22.16
		829.0	23.09	22.19
15MHz	1 RB high	841.5	24.05	23.50
		836.5	23.90	23.53
		831.5	23.91	23.11
	1 RB low	841.5	24.03	23.40
		836.5	23.85	23.42
		831.5	23.82	23.19
	50% RB mid	841.5	23.08	22.05
		836.5	23.19	22.19
		831.5	23.28	22.37
	100% RB	841.5	23.07	22.19
		836.5	23.03	22.16
		831.5	23.06	22.21

LTE band 41

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
5MHz	1 RB high	2687.5	22.64	21.57
		2593.0	22.74	21.23
		2498.5	22.82	21.69
	1 RB low	2687.5	22.71	21.69
		2593.0	23.02	21.56
		2498.5	22.53	21.40
	50% RB mid	2687.5	22.82	21.13
		2593.0	22.74	21.66
		2498.5	22.95	21.70
	100% RB	2687.5	23.15	21.37
		2593.0	21.62	20.72
		2498.5	21.97	20.95
10MHz	1 RB high	2685.0	22.02	20.82
		2593.0	22.03	20.95
		2501.0	22.17	21.10
	1 RB low	2685.0	21.66	20.56
		2593.0	21.87	20.82
		2501.0	21.93	20.90
	50% RB mid	2685.0	21.84	20.75
		2593.0	22.10	21.16
		2501.0	22.79	22.22
	100% RB	2685.0	22.70	22.10
		2593.0	22.83	21.40
		2501.0	22.76	22.69
15MHz	1 RB high	2682.5	23.38	22.48
		2593.0	22.70	22.05
		2503.5	22.61	22.07
	1 RB low	2682.5	22.84	21.13
		2593.0	22.88	22.44
		2503.5	22.92	22.30
	50% RB mid	2682.5	21.98	20.58
		2593.0	21.95	20.99
		2503.5	21.96	20.91
	100% RB	2682.5	22.02	20.91
		2593.0	22.21	21.26
		2503.5	21.83	20.67

20MHz	1 RB high	2680.0	21.91	20.96
		2593.0	21.81	20.89
		2506.0	22.00	20.80
	1 RB low	2680.0	22.15	21.05
		2593.0	22.77	21.72
		2506.0	22.83	22.17
	50% RB mid	2680.0	22.84	21.52
		2593.0	22.79	21.77
		2506.0	23.11	22.29
	100% RB	2680.0	23.03	21.74
		2593.0	22.94	22.17
		2506.0	22.81	21.25

LTE band 66

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1779.3	23.60	22.74
		1745.0	23.94	22.95
		1710.7	23.64	22.37
	1 RB low	1779.3	23.71	22.60
		1745.0	23.93	22.65
		1710.7	23.58	22.37
	50% RB mid	1779.3	23.90	22.84
		1745.0	23.87	22.90
		1710.7	23.59	22.80
	100% RB	1779.3	22.85	21.65
		1745.0	22.82	21.99
		1710.7	22.62	21.82
3MHz	1 RB high	1778.5	23.80	22.87
		1745.0	23.90	22.74
		1711.5	23.94	22.95
	1 RB low	1778.5	23.94	22.92
		1745.0	23.92	22.96
		1711.5	23.82	22.99
	50% RB mid	1778.5	22.75	21.77
		1745.0	22.88	21.92
		1711.5	22.78	21.92
	100% RB	1778.5	22.64	21.83
		1745.0	22.94	21.93
		1711.5	22.83	21.91
5MHz	1 RB high	1777.5	23.56	22.16
		1745.0	23.98	22.81
		1712.5	23.85	22.43
	1 RB low	1777.5	23.68	22.22
		1745.0	23.96	22.31
		1712.5	23.72	22.28
	50% RB mid	1777.5	22.71	21.81
		1745.0	22.98	21.73
		1712.5	22.73	21.68
	100% RB	1777.5	22.69	21.89
		1745.0	22.95	21.87
		1712.5	22.88	21.71
10MHz	1 RB high	1775.0	23.52	22.38
		1745.0	24.00	22.92

	1 RB low	1715.0	23.77	22.96
		1775.0	23.88	22.82
		1745.0	23.94	22.98
		1715.0	23.83	22.98
	50% RB mid	1775.0	22.64	22.00
		1745.0	22.88	21.91
		1715.0	22.88	21.93
	100% RB	1775.0	22.58	21.70
		1745.0	22.96	21.94
		1715.0	22.90	21.84
15MHz	1 RB high	1772.5	23.42	22.96
		1745.0	23.72	22.56
		1717.5	23.90	22.94
	1 RB low	1772.5	23.89	22.94
		1745.0	23.81	22.83
		1717.5	23.75	22.80
	50% RB mid	1772.5	22.65	21.83
		1745.0	22.77	21.89
		1717.5	22.82	21.68
	100% RB	1772.5	22.52	21.59
		1745.0	22.82	21.77
		1717.5	22.77	21.83
20MHz	1 RB high	1770.0	23.21	21.88
		1745.0	23.22	22.17
		1720.0	22.77	21.59
	1 RB low	1770.0	23.21	21.87
		1745.0	23.17	22.04
		1720.0	22.74	21.57
	50% RB mid	1770.0	22.06	21.18
		1745.0	22.21	21.25
		1720.0	22.29	21.28
	100% RB	1770.0	21.99	20.92
		1745.0	22.34	21.29
		1720.0	22.14	21.24

LTE band 71

Bandwidth	RB size/offset	Frequency (MHz)	Power (dBm)	
			QPSK	16QAM
5MHz	1 RB high	695.5	22.72	21.82
		680.5	22.95	21.78
		665.5	23.36	21.94
	1 RB low	695.5	22.61	21.58
		680.5	22.83	21.55
		665.5	23.03	21.56
	50% RB mid	695.5	21.97	20.90
		680.5	22.11	20.96
		665.5	22.24	21.22
	100% RB	695.5	22.03	21.03
		680.5	22.12	20.99
		665.5	22.20	21.34
10MHz	1 RB high	693	23.20	22.14
		680.5	23.07	22.35
		668	23.18	22.62
	1 RB low	693	23.10	22.21
		680.5	22.90	22.12
		668	23.14	21.77
	50% RB mid	693	22.16	21.31
		680.5	22.06	21.08
		668	22.20	21.43
	100% RB	693	22.05	21.14
		680.5	22.09	21.06
		668	22.08	21.23
15MHz	1 RB high	690.5	23.06	22.62
		680.5	22.97	22.45
		670.5	23.27	22.40
	1 RB low	690.5	23.01	22.51
		680.5	22.91	22.11
		670.5	23.39	21.71
	50% RB mid	690.5	22.15	20.98
		680.5	22.00	20.91
		670.5	22.15	21.27
	100% RB	690.5	21.90	20.94
		680.5	22.12	21.03
		670.5	22.17	21.16

20MHz	1 RB high	688	22.66	21.55
		680.5	23.05	21.74
		673	22.76	21.83
	1 RB low	688	22.66	21.60
		680.5	22.85	21.60
		673	22.93	21.50
	50% RB mid	688	21.94	21.12
		680.5	22.01	20.98
		673	22.14	21.13
	100% RB	688	21.80	20.91
		680.5	22.04	21.04
		673	22.03	21.03

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 22.913(a) specifies "Mobile stations are limited to 2.0 watts EIRP."

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power". and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP."

Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP."

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP."


Rule Part 27.50(a)(3) specifies "For mobile and portable stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth."

Rule Part 90.635(b) specifies "The maximum output power of the transmitter for mobile stations is 100 watts(50dBm)".


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360 and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with RMS detector.

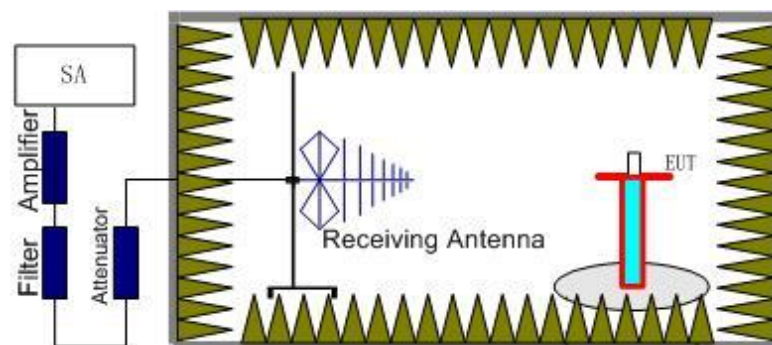

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

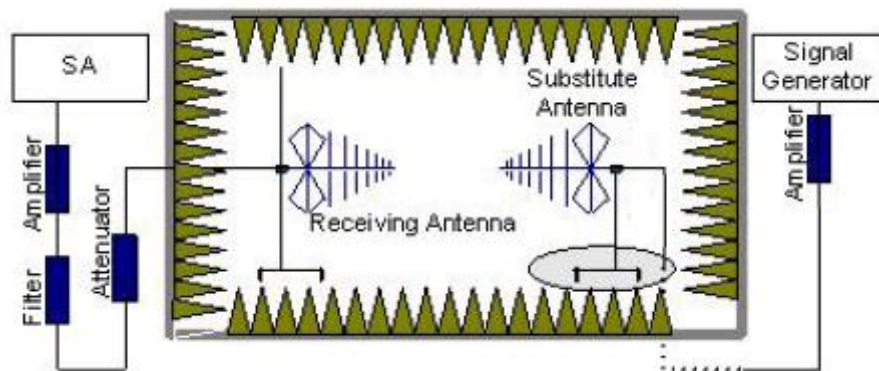

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna. The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

A.1.3.3 Measurement result

Limits: ≤ 33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.50	-22.02	3.58	45.68	6.10	26.18	33.00	6.82	H
2535.00	-20.23	3.63	44.82	6.16	27.12	33.00	5.88	H
2567.50	-20.98	3.65	44.92	6.22	26.51	33.00	6.49	H

LTE Band 7_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505.00	-21.71	3.59	45.64	6.11	26.45	33.00	6.55	H
2535.00	-19.99	3.63	44.82	6.16	27.36	33.00	5.64	H
2565.00	-21.25	3.65	44.97	6.22	26.29	33.00	6.71	H

LTE Band 7_15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.50	-21.01	3.59	44.92	6.11	26.43	33.00	6.57	H
2535.00	-20.07	3.63	44.82	6.16	27.28	33.00	5.72	H
2562.50	-21.82	3.65	45.67	6.21	26.41	33.00	6.59	H

LTE Band 7_20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510.00	-20.88	3.58	45.36	6.12	27.02	33.00	5.98	H
2535.00	-20.05	3.63	44.82	6.16	27.30	33.00	5.70	H
2560.00	-21.97	3.64	45.98	6.21	26.58	33.00	6.42	H

LTE Band 7_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.50	-22.57	3.58	45.68	6.10	25.63	33.00	7.37	H
2535.00	-21.29	3.63	44.82	6.16	26.06	33.00	6.94	H
2567.50	-22.04	3.65	44.92	6.22	25.45	33.00	7.55	H

LTE Band 7_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505.00	-22.65	3.59	45.64	6.11	25.51	33.00	7.49	H
2535.00	-21.04	3.63	44.82	6.16	26.31	33.00	6.69	H
2565.00	-21.83	3.65	44.97	6.22	25.71	33.00	7.29	H

LTE Band 7_15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.50	-21.84	3.59	44.92	6.11	25.60	33.00	7.40	H
2535.00	-21.08	3.63	44.82	6.16	26.27	33.00	6.73	H
2562.50	-22.87	3.65	45.67	6.21	25.36	33.00	7.64	H

LTE Band 7_20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510.00	-22.46	3.58	45.36	6.12	25.44	33.00	7.56	H
2535.00	-20.72	3.63	44.82	6.16	26.63	33.00	6.37	H
2560.00	-22.69	3.64	45.98	6.21	25.86	33.00	7.14	H

LTE Band 12 - ERP

Limits: $\leq 34.77\text{dBm}$ (3W)

LTE Band 12_1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
699.70	-22.98	1.90	44.66	0.77	2.15	18.40	34.77	16.37	V
707.50	-22.74	1.91	44.94	0.62	2.15	18.76	34.77	16.01	V
715.30	-22.50	1.92	45.26	0.50	2.15	19.19	34.77	15.58	V

LTE Band 12_3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.50	-22.92	1.90	44.68	0.76	2.15	18.47	34.77	16.30	V
707.50	-23.07	1.91	44.94	0.62	2.15	18.43	34.77	16.34	V
714.50	-22.36	1.92	45.26	0.50	2.15	19.33	34.77	15.44	V

LTE Band 12_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.50	-23.11	1.90	44.81	0.74	2.15	18.39	34.77	16.38	V
707.50	-22.86	1.91	44.94	0.62	2.15	18.64	34.77	16.13	V
713.50	-22.76	1.92	45.22	0.50	2.15	18.89	34.77	15.88	V

LTE Band 12_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704.00	-22.92	1.91	44.93	0.70	2.15	18.65	34.77	16.12	V
707.50	-22.71	1.91	44.94	0.62	2.15	18.79	34.77	15.98	V
711.00	-22.70	1.92	45.19	0.53	2.15	18.95	34.77	15.82	V

LTE Band 12_1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
699.70	-23.75	1.90	44.66	0.77	2.15	17.63	34.77	17.14	V
707.50	-23.49	1.91	44.94	0.62	2.15	18.01	34.77	16.76	V
715.30	-23.08	1.92	45.26	0.50	2.15	18.61	34.77	16.16	V

LTE Band 12_3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
700.50	-23.82	1.90	44.68	0.76	2.15	17.57	34.77	17.20	V
707.50	-23.86	1.91	44.94	0.62	2.15	17.64	34.77	17.13	V
714.50	-23.45	1.92	45.26	0.50	2.15	18.24	34.77	16.53	V

LTE Band 12_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
701.50	-23.81	1.90	44.81	0.74	2.15	17.69	34.77	17.08	V
707.50	-24.14	1.91	44.94	0.62	2.15	17.36	34.77	17.41	V
713.50	-23.42	1.92	45.22	0.50	2.15	18.23	34.77	16.54	V

LTE Band 12_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
704.00	-23.67	1.91	44.93	0.70	2.15	17.90	34.77	16.87	V
707.50	-23.72	1.91	44.94	0.62	2.15	17.78	34.77	16.99	V
711.00	-23.52	1.92	45.19	0.53	2.15	18.13	34.77	16.64	V

LTE Band 25- EIRP

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 25_1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.70	-21.75	2.92	43.75	4.87	23.95	33.00	9.05	H
1882.50	-20.65	3.13	43.75	4.81	24.78	33.00	8.22	H
1914.30	-20.60	2.89	43.78	4.75	25.04	33.00	7.96	H

LTE Band 25_3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.50	-21.79	2.87	43.75	4.87	23.96	33.00	9.04	H
1882.50	-21.08	3.13	43.75	4.81	24.35	33.00	8.65	H
1913.50	-20.43	2.88	43.78	4.76	25.23	33.00	7.77	H

LTE Band 25_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.50	-21.99	2.87	43.75	4.87	23.76	33.00	9.24	H
1882.50	-21.19	3.13	43.75	4.81	24.24	33.00	8.76	H
1912.50	-20.40	2.86	43.77	4.76	25.27	33.00	7.73	H

LTE Band 25_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.00	-21.86	2.88	43.74	4.86	23.86	33.00	9.14	H
1882.50	-20.77	3.13	43.75	4.81	24.66	33.00	8.34	H
1910.00	-20.53	2.88	43.77	4.76	25.12	33.00	7.88	H

LTE Band 25_15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.50	-21.85	2.87	43.75	4.86	23.89	33.00	9.11	H
1882.50	-20.72	3.13	43.75	4.81	24.71	33.00	8.29	H
1907.50	-20.92	2.84	43.77	4.77	24.78	33.00	8.22	H

LTE Band 25_20 MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.00	-21.66	2.86	43.75	4.85	24.08	33.00	8.92	H
1882.50	-20.82	3.13	43.75	4.81	24.61	33.00	8.39	H
1905.00	-20.46	2.87	43.77	4.77	25.21	33.00	7.79	H

LTE Band 25_1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.70	-22.52	2.92	43.75	4.87	23.18	33.00	9.82	H
1882.50	-21.39	3.13	43.75	4.81	24.04	33.00	8.96	H
1914.30	-21.34	2.89	43.78	4.75	24.30	33.00	8.70	H

LTE Band 25_3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.50	-22.74	2.87	43.75	4.87	23.01	33.00	9.99	H
1882.50	-22.16	3.13	43.75	4.81	23.27	33.00	9.73	H
1913.50	-21.63	2.88	43.78	4.76	24.03	33.00	8.97	H

LTE Band 25_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.50	-22.71	2.87	43.75	4.87	23.04	33.00	9.96	H
1882.50	-22.37	3.13	43.75	4.81	23.06	33.00	9.94	H
1912.50	-21.49	2.86	43.77	4.76	24.18	33.00	8.82	H

LTE Band 25_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.00	-22.73	2.88	43.74	4.86	22.99	33.00	10.01	H
1882.50	-21.93	3.13	43.75	4.81	23.50	33.00	9.50	H
1910.00	-21.49	2.88	43.77	4.76	24.16	33.00	8.84	H

LTE Band 25_15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.50	-22.44	2.87	43.75	4.86	23.30	33.00	9.70	H
1882.50	-22.03	3.13	43.75	4.81	23.40	33.00	9.60	H
1907.50	-21.93	2.84	43.77	4.77	23.77	33.00	9.23	H

LTE Band 25_20 MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.00	-23.12	2.86	43.75	4.85	22.62	33.00	10.38	H
1882.50	-21.45	3.13	43.75	4.81	23.98	33.00	9.02	H
1905.00	-21.56	2.87	43.77	4.77	24.11	33.00	8.89	H

LTE Band 26(814MHz~824MHz)- ERP

Limits: ≤50dBm (100W)

LTE Band 26_1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
814.70	-25.21	2.13	45.86	0.89	2.15	17.26	50.00	32.74	H
819.00	-24.46	2.19	45.84	1.05	2.15	18.09	50.00	31.91	H
823.30	-23.40	2.24	45.79	0.55	2.15	18.55	50.00	31.45	H

LTE Band 26_3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.50	-25.18	2.14	45.87	0.93	2.15	17.33	50.00	32.67	H
819.00	-24.37	2.19	45.84	1.05	2.15	18.18	50.00	31.82	H
822.50	-23.31	2.23	45.81	0.33	2.15	18.45	50.00	31.55	H

LTE Band 26_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
816.50	-25.23	2.16	45.88	0.98	2.15	17.32	50.00	32.68	H
819.00	-24.83	2.19	45.84	1.05	2.15	17.72	50.00	32.28	H
821.50	-23.98	2.22	45.82	0.71	2.15	18.18	50.00	31.82	H

LTE Band 26_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
819.00	-24.49	2.19	45.84	1.05	2.15	18.06	50.00	31.94	H

LTE Band 26_1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
814.70	-25.70	2.13	45.86	0.89	2.15	16.77	50.00	33.23	H
819.00	-25.23	2.19	45.84	1.05	2.15	17.32	50.00	32.68	H
823.30	-24.27	2.24	45.79	0.55	2.15	17.68	50.00	32.32	H

LTE Band 26_3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.50	-26.06	2.14	45.87	0.93	2.15	16.45	50.00	33.55	H
819.00	-25.19	2.19	45.84	1.05	2.15	17.36	50.00	32.64	H
822.50	-24.14	2.23	45.81	0.33	2.15	17.62	50.00	32.38	H

LTE Band 26_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
816.50	-26.14	2.16	45.88	0.98	2.15	16.41	50.00	33.59	H
819.00	-25.62	2.19	45.84	1.05	2.15	16.93	50.00	33.07	H
821.50	-24.85	2.22	45.82	0.71	2.15	17.31	50.00	32.69	H

LTE Band 26_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
819.00	-25.69	2.19	45.84	1.05	2.15	16.86	50.00	33.14	H

LTE Band 26(824MHz~849MHz)- ERP

Limits: ≤38.45dBm (7W)

LTE Band 26_1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.70	-23.42	2.26	45.79	0.95	2.15	18.91	38.45	19.54	H
836.50	-22.64	2.26	45.66	0.82	2.15	19.43	38.45	19.02	H
848.30	-23.01	2.27	45.55	0.80	2.15	18.92	38.45	19.53	V

LTE Band 26_3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.50	-23.53	2.26	45.79	0.94	2.15	18.79	38.45	19.66	H
836.50	-22.65	2.26	45.66	0.82	2.15	19.42	38.45	19.03	H
847.50	-23.13	2.27	45.56	0.81	2.15	18.82	38.45	19.63	H

LTE Band 26_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.50	-23.59	2.25	45.77	0.93	2.15	18.71	38.45	19.74	H
836.50	-22.81	2.26	45.66	0.82	2.15	19.26	38.45	19.19	H
846.50	-23.16	2.26	45.56	0.82	2.15	18.81	38.45	19.64	V

LTE Band 26_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.00	-23.40	2.13	45.74	0.90	2.15	18.96	38.45	19.49	H
836.50	-22.48	2.26	45.66	0.82	2.15	19.59	38.45	18.86	H
844.00	-23.22	2.26	45.59	0.82	2.15	18.78	38.45	19.67	H

LTE Band 26_15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{Cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.50	-23.14	2.12	45.71	0.87	2.15	19.17	38.45	19.28	H
836.50	-22.73	2.26	45.66	0.82	2.15	19.34	38.45	19.11	H
841.50	-23.27	2.26	45.61	0.82	2.15	18.75	38.45	19.70	H

LTE Band 26_1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.70	-24.16	2.26	45.79	0.95	2.15	18.17	38.45	20.28	H
836.50	-23.42	2.26	45.66	0.82	2.15	18.65	38.45	19.80	H
848.30	-23.40	2.27	45.55	0.80	2.15	18.53	38.45	19.92	V

LTE Band 26_3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.50	-24.04	2.26	45.79	0.94	2.15	18.28	38.45	20.17	H
836.50	-24.00	2.26	45.66	0.82	2.15	18.07	38.45	20.38	H
847.50	-24.13	2.27	45.56	0.81	2.15	17.82	38.45	20.63	H

LTE Band 26_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.50	-24.20	2.25	45.77	0.93	2.15	18.10	38.45	20.35	H
836.50	-24.09	2.26	45.66	0.82	2.15	17.98	38.45	20.47	H
846.50	-23.93	2.26	45.56	0.82	2.15	18.04	38.45	20.41	H

LTE Band 26_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.00	-24.23	2.13	45.74	0.90	2.15	18.13	38.45	20.32	H
836.50	-23.69	2.26	45.66	0.82	2.15	18.38	38.45	20.07	H
844.00	-23.87	2.26	45.59	0.82	2.15	18.13	38.45	20.32	H

LTE Band 26_15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.50	-23.62	2.12	45.71	0.87	2.15	18.69	38.45	19.76	H
836.50	-23.68	2.26	45.66	0.82	2.15	18.39	38.45	20.06	H
841.50	-24.35	2.26	45.61	0.82	2.15	17.67	38.45	20.78	H

LTE Band 41- EIRP

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 41_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2498.50	-25.98	3.58	45.59	6.10	22.13	33.00	10.87	H
2593.00	-26.38	3.69	44.93	6.27	21.13	33.00	11.87	H
2687.50	-33.31	3.73	44.98	6.44	14.38	33.00	18.62	H

LTE Band 41_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501.00	-25.92	3.58	45.65	6.10	22.25	33.00	10.75	H
2593.00	-26.41	3.69	44.93	6.27	21.10	33.00	11.90	H
2685.00	-33.43	3.73	44.98	6.43	14.25	33.00	18.75	H

LTE Band 41_15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.50	-25.79	3.58	45.65	6.11	22.39	33.00	10.61	H
2593.00	-26.33	3.69	44.93	6.27	21.18	33.00	11.82	H
2682.50	-33.37	3.73	44.98	6.43	14.31	33.00	18.69	H

LTE Band 41_20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506.00	-25.41	3.59	45.15	6.11	22.26	33.00	10.74	H
2593.00	-26.07	3.69	44.93	6.27	21.44	33.00	11.56	H
2680.00	-33.06	3.73	44.97	6.42	14.60	33.00	18.40	H

LTE Band 41_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2498.50	-27.23	3.58	45.59	6.10	20.88	33.00	12.12	H
2593.00	-27.02	3.69	44.93	6.27	20.49	33.00	12.51	H
2687.50	-34.38	3.73	44.98	6.44	13.31	33.00	19.69	H

LTE Band 41_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501.00	-27.05	3.58	45.65	6.10	21.12	33.00	11.88	H
2593.00	-27.03	3.69	44.93	6.27	20.48	33.00	12.52	H
2685.00	-34.20	3.73	44.98	6.43	13.48	33.00	19.52	H

LTE Band 41_15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.50	-26.98	3.58	45.65	6.11	21.20	33.00	11.80	H
2593.00	-26.94	3.69	44.93	6.27	20.57	33.00	12.43	H
2682.50	-34.15	3.73	44.98	6.43	13.53	33.00	19.47	H

LTE Band 41_20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506.00	-26.49	3.59	45.15	6.11	21.18	33.00	11.82	H
2593.00	-27.33	3.69	44.93	6.27	20.18	33.00	12.82	H
2680.00	-33.75	3.73	44.97	6.42	13.91	33.00	19.09	H

LTE Band 66- EIRP

Limits: ≤30dBm (1W)

LTE Band 66_1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.70	-28.73	3.17	44.10	5.12	23.66	30.00	6.34	H
1745.00	-28.76	3.68	44.16	5.06	24.14	30.00	5.86	H
1779.30	-26.59	3.04	44.03	5.00	25.48	30.00	4.52	H

LTE Band 66_3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.50	-28.93	3.40	44.10	5.12	23.69	30.00	6.31	H
1745.00	-28.80	3.68	44.16	5.06	24.10	30.00	5.90	H
1778.50	-26.74	3.04	44.03	5.00	25.33	30.00	4.67	H

LTE Band 66_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.50	-21.99	3.66	44.10	5.12	23.57	30.00	6.43	H
1745.00	-21.46	3.68	44.16	5.06	24.08	30.00	5.92	H
1777.50	-20.85	3.04	44.04	5.00	25.15	30.00	4.85	H

LTE Band 66_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715.00	-21.77	3.56	44.10	5.11	23.88	30.00	6.12	H
1745.00	-21.43	3.68	44.16	5.06	24.11	30.00	5.89	H
1775.00	-20.83	3.05	44.05	5.01	25.17	30.00	4.83	H

LTE Band 66_15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.50	-21.89	3.47	44.11	5.11	23.86	30.00	6.14	H
1745.00	-21.32	3.68	44.16	5.06	24.22	30.00	5.78	H
1772.50	-21.19	3.05	44.06	5.01	24.83	30.00	5.17	H

LTE Band 66_20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720.00	-22.95	3.37	44.11	5.10	22.89	30.00	7.11	H
1745.00	-21.44	3.68	44.16	5.06	24.10	30.00	5.90	H
1770.00	-20.98	3.05	44.07	5.01	25.06	30.00	4.94	H

LTE Band 66_1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.70	-29.49	3.17	44.10	5.12	22.90	30.00	7.10	H
1745.00	-29.56	3.68	44.16	5.06	23.34	30.00	6.66	H
1779.30	-27.73	3.04	44.03	5.00	24.34	30.00	5.66	H

LTE Band 66_3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.50	-29.74	3.40	44.10	5.12	22.88	30.00	7.12	H
1745.00	-29.61	3.68	44.16	5.06	23.29	30.00	6.71	H
1778.50	-28.05	3.04	44.03	5.00	24.02	30.00	5.98	H

LTE Band 66_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.50	-22.78	3.66	44.10	5.12	22.78	30.00	7.22	H
1745.00	-22.29	3.68	44.16	5.06	23.25	30.00	6.75	H
1777.50	-22.07	3.04	44.04	5.00	23.93	30.00	6.07	H

LTE Band 66_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715.00	-22.65	3.56	44.10	5.11	23.00	30.00	7.00	H
1745.00	-22.26	3.68	44.16	5.06	23.28	30.00	6.72	H
1775.00	-21.61	3.05	44.05	5.01	24.39	30.00	5.61	H

LTE Band 66_15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.50	-22.77	3.47	44.11	5.11	22.98	30.00	7.02	H
1745.00	-22.17	3.68	44.16	5.06	23.37	30.00	6.63	H
1772.50	-22.34	3.05	44.06	5.01	23.68	30.00	6.32	H

LTE Band 66_20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720.00	-23.71	3.37	44.11	5.10	22.13	30.00	7.87	H
1745.00	-22.73	3.68	44.16	5.06	22.81	30.00	7.19	H
1770.00	-21.68	3.05	44.07	5.01	24.36	30.00	5.64	H

LTE Band 71- ERP

Limits: ≤ 34.77 dBm (3W)

LTE Band 71_5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
665.50	-23.11	1.87	44.73	0.78	2.15	18.38	34.77	16.39	V
680.50	-22.45	1.88	44.72	0.78	2.15	19.01	34.77	15.76	V
695.50	-22.30	1.89	44.67	0.77	2.15	19.10	34.77	15.67	V

LTE Band 71_10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
668.00	-22.85	1.87	44.75	0.78	2.15	18.66	34.77	16.11	V
680.50	-22.39	1.88	44.72	0.78	2.15	19.07	34.77	15.70	V
693.00	-21.85	1.89	44.67	0.77	2.15	19.55	34.77	15.22	V

LTE Band 71_15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
670.50	-22.73	1.88	44.75	0.78	2.15	18.77	34.77	16.00	V
680.50	-22.40	1.88	44.72	0.78	2.15	19.06	34.77	15.71	V
690.50	-21.49	1.89	44.73	0.77	2.15	19.97	34.77	14.80	V

LTE Band 71_20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
673.00	-22.70	1.88	44.71	0.78	2.15	18.76	34.77	16.01	V
680.50	-22.32	1.88	44.72	0.78	2.15	19.14	34.77	15.63	V
688.00	-21.75	1.89	44.72	0.77	2.15	19.71	34.77	15.06	V

LTE Band 71_5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
665.50	-23.80	1.87	44.73	0.78	2.15	17.69	34.77	17.08	V
680.50	-23.46	1.88	44.72	0.78	2.15	18.00	34.77	16.77	V
695.50	-22.93	1.89	44.67	0.77	2.15	18.47	34.77	16.30	V

LTE Band 71_10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
668.00	-24.02	1.87	44.75	0.78	2.15	17.50	34.77	17.27	V
680.50	-23.28	1.88	44.72	0.78	2.15	18.18	34.77	16.59	V
693.00	-22.74	1.89	44.67	0.77	2.15	18.66	34.77	16.11	V

LTE Band 71_15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
670.50	-23.86	1.88	44.75	0.78	2.15	17.64	34.77	17.13	V
680.50	-23.39	1.88	44.72	0.78	2.15	18.07	34.77	16.70	V
690.50	-22.71	1.89	44.73	0.77	2.15	18.75	34.77	16.02	V

LTE Band 71_20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a (dBi)	Correction (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
673.00	-23.44	1.88	44.71	0.78	2.15	18.02	34.77	16.75	V
680.50	-23.61	1.88	44.72	0.78	2.15	17.85	34.77	16.92	V
688.00	-22.76	1.89	44.72	0.77	2.15	18.70	34.77	16.07	V

Sample frequency: 673.00MHz

Peak EIRP(dBm) = P_{Mea}(-23.44dBm) - G_a (-0.78dBi) - P_{Ag} (-44.71dB) - P_{cl} (1.88dB) - 2.15 = 18.02dBm

Note: Expanded measurement uncertainty is $U = 2.84$ dB, $k = 2$.

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 7,12,25,26,41,66,71.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360 and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

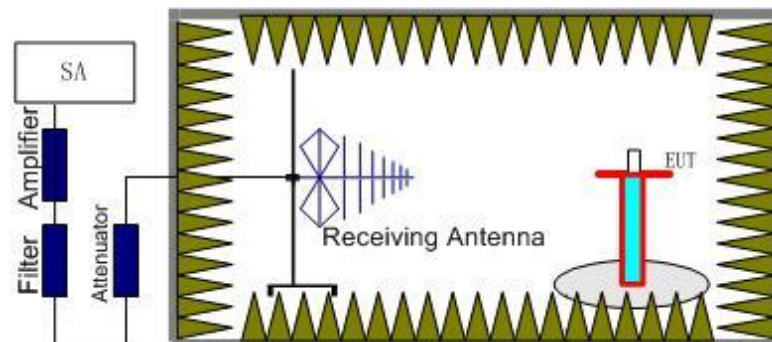

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

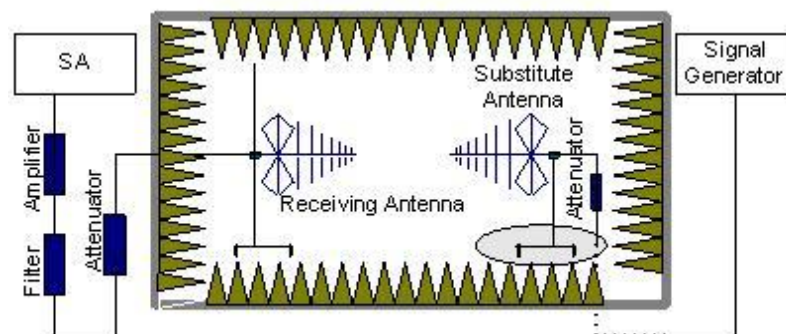

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 27.53(a) states for mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305 MHz, 55

+ 10 log (P) dB on all frequencies between 2296 and 2300MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz; By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.

Part 90.691 states that out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows: For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116\text{Log}_{10}(f/6.1)$ decibels or $50 + 10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee’s frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 7,12,25,26,41,66,71. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 7,12,25,26,41,66,71 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.02	-57.24	6.59	9.91	-53.92	-25.00	28.92	H
7500.01	-54.26	8.39	12.20	-50.45	-25.00	25.45	H
10026.01	-46.69	9.25	12.91	-43.03	-25.00	18.03	H
12498.01	-49.14	10.18	13.20	-46.12	-25.00	21.12	H
15000.00	-45.55	11.22	14.00	-42.77	-25.00	17.77	V
17522.00	-43.48	12.81	14.93	-41.36	-25.00	16.36	H

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5073.02	-57.60	6.70	10.00	-54.30	-25.00	29.30	H
7609.01	-54.61	8.01	12.29	-50.33	-25.00	25.33	V
10150.01	-46.80	9.38	12.96	-43.22	-25.00	18.22	V
12679.01	-49.66	10.33	13.31	-46.68	-25.00	21.68	V
15225.00	-46.54	11.37	13.86	-44.05	-25.00	19.05	H
17745.00	-44.09	12.43	15.24	-41.28	-25.00	16.28	V

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5139.02	-56.14	6.86	10.09	-52.91	-25.00	27.91	H
7705.01	-54.19	8.42	12.36	-50.25	-25.00	25.25	V
10280.01	-45.53	9.57	13.01	-42.09	-25.00	17.09	V
12819.01	-48.93	10.72	13.39	-46.26	-25.00	21.26	H
15399.00	-45.97	11.39	13.76	-43.60	-25.00	18.60	H
17969.00	-43.80	12.89	15.56	-41.13	-25.00	16.13	H

LTE Band 12, 1.4MHz, QPSK, Channel 23017

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1393.01	-60.18	3.23	4.94	2.15	-60.62	-13.00	47.62	H
2100.00	-47.83	4.19	4.90	2.15	-49.27	-13.00	36.27	H
2806.00	-52.22	4.92	6.65	2.15	-52.64	-13.00	39.64	V
3499.02	-54.57	5.52	8.20	2.15	-54.04	-13.00	41.04	H
4189.02	-54.84	6.18	9.09	2.15	-54.08	-13.00	41.08	V
4899.01	-55.84	6.73	9.80	2.15	-54.92	-13.00	41.92	H

LTE Band 12, 1.4MHz, QPSK, Channel 23095

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1417.01	-60.69	3.26	5.07	2.15	-61.03	-13.00	48.03	H
2123.00	-46.79	4.21	4.97	2.15	-48.18	-13.00	35.18	V
2838.00	-52.37	4.95	6.71	2.15	-52.76	-13.00	39.76	V
3538.02	-55.05	5.70	8.25	2.15	-54.65	-13.00	41.65	H
4230.02	-55.45	6.26	9.13	2.15	-54.73	-13.00	41.73	H
4943.01	-54.85	6.70	9.84	2.15	-53.86	-13.00	40.86	H

LTE Band 12, 1.4MHz, QPSK, Channel 23173

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1431.01	-57.86	3.28	5.14	2.15	-58.15	-13.00	45.15	V
2146.00	-43.52	4.24	5.04	2.15	-44.87	-13.00	31.87	V
2872.00	-51.58	4.97	6.77	2.15	-51.93	-13.00	38.93	V
3577.02	-54.44	6.10	8.31	2.15	-54.38	-13.00	41.38	V
4306.02	-55.39	6.19	9.21	2.15	-54.52	-13.00	41.52	H
5002.01	-55.38	6.60	9.90	2.15	-54.23	-13.00	41.23	V

LTE Band 25, 1.4MHz, QPSK, Channel 26047

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3702.02	-42.87	6.42	8.48	-40.81	-13.00	27.81	H
9260.01	-45.68	9.06	13.26	-41.48	-13.00	28.48	V
11499.01	-50.02	9.81	13.10	-46.73	-13.00	33.73	V
13434.01	-47.60	10.59	14.11	-44.08	-13.00	31.08	V
15064.00	-44.71	11.30	13.96	-42.05	-13.00	29.05	H
17296.00	-42.29	12.37	14.45	-40.21	-13.00	27.21	H

LTE Band 25, 1.4MHz, QPSK, Channel 26365

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3765.02	-44.29	6.25	8.57	-41.97	-13.00	28.97	H
9419.01	-49.19	9.13	13.35	-44.97	-13.00	31.97	V
11282.01	-50.61	9.89	13.14	-47.36	-13.00	34.36	H
13170.01	-47.65	10.63	13.74	-44.54	-13.00	31.54	H
15058.00	-45.42	11.29	13.97	-42.74	-13.00	29.74	H
16975.00	-41.96	12.28	13.79	-40.45	-13.00	27.45	H

LTE Band 25, 1.4MHz, QPSK, Channel 26683

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3829.02	-51.73	6.06	8.66	-49.13	-13.00	36.13	H
9578.01	-52.08	9.26	13.32	-48.02	-13.00	35.02	V
11518.01	-49.92	9.81	13.10	-46.63	-13.00	33.63	H
13440.01	-46.61	10.60	14.12	-43.09	-13.00	30.09	V
15333.00	-44.45	11.32	13.80	-41.97	-13.00	28.97	V
17271.00	-43.15	12.37	14.40	-41.12	-13.00	28.12	H

LTE Band 26(814MHz~824MHz), 1.4MHz, QPSK, Channel 26697

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.01	-60.16	3.57	5.22	2.15	-60.66	-13.00	47.66	H
2475.00	-42.99	4.60	6.03	2.15	-43.71	-13.00	30.71	V
3299.02	-47.97	5.29	7.72	2.15	-47.69	-13.00	34.69	V
4118.02	-55.31	6.04	9.02	2.15	-54.48	-13.00	41.48	V
4952.01	-55.15	6.69	9.85	2.15	-54.14	-13.00	41.14	V
5765.01	-53.44	7.24	10.55	2.15	-52.28	-13.00	39.28	H

LTE Band 26(814MHz~824MHz), 1.4MHz, QPSK, Channel 26740

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1659.01	-60.17	3.57	5.21	2.15	-60.68	-13.00	47.68	H
2510.00	-46.29	4.63	6.12	2.15	-46.95	-13.00	33.95	V
3346.02	-50.85	5.31	7.83	2.15	-50.48	-13.00	37.48	H
4167.02	-55.31	6.13	9.07	2.15	-54.52	-13.00	41.52	V
5027.01	-55.32	6.57	9.94	2.15	-54.10	-13.00	41.10	V
5848.01	-53.33	7.23	10.53	2.15	-52.18	-13.00	39.18	V

LTE Band 26(814MHz~824MHz), 1.4MHz, QPSK, Channel 26783

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.01	-59.43	3.60	5.15	2.15	-60.03	-13.00	47.03	V
2545.00	-44.64	4.66	6.18	2.15	-45.27	-13.00	32.27	V
3394.02	-50.70	5.36	7.95	2.15	-50.26	-13.00	37.26	H
4245.02	-53.52	6.24	9.15	2.15	-52.76	-13.00	39.76	H
5071.01	-55.85	6.69	10.00	2.15	-54.69	-13.00	41.69	V
5937.01	-53.07	7.47	10.51	2.15	-52.18	-13.00	39.18	H

LTE Band 26(824MHz~849MHz), 1.4MHz, QPSK, Channel 26797

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2444.00	-43.36	4.57	5.93	2.15	-44.15	-13.00	31.15	V
3259.02	-49.04	5.28	7.62	2.15	-48.85	-13.00	35.85	V
7326.01	-52.77	8.10	11.99	2.15	-51.03	-13.00	38.03	V
8138.01	-52.40	8.39	12.71	2.15	-50.23	-13.00	37.23	H
8942.00	-51.09	8.99	13.09	2.15	-49.14	-13.00	36.14	H
9774.00	-51.50	8.98	13.13	2.15	-49.50	-13.00	36.50	H

LTE Band 26(824MHz~849MHz), 1.4MHz, QPSK, Channel 26915

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1631.01	-59.71	3.55	5.26	2.15	-60.15	-13.00	47.15	V
2457.00	-48.54	4.58	5.97	2.15	-49.30	-13.00	36.30	V
3276.02	-48.65	5.28	7.66	2.15	-48.42	-13.00	35.42	V
4085.02	-55.60	6.04	8.99	2.15	-54.80	-13.00	41.80	V
4903.01	-54.86	6.73	9.80	2.15	-53.94	-13.00	40.94	H
5737.01	-54.72	7.28	10.55	2.15	-53.60	-13.00	40.60	H

LTE Band 26(824MHz~849MHz), 1.4MHz, QPSK, Channel 27033

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2470.00	-46.62	4.59	6.01	2.15	-47.35	-13.00	34.35	V
3294.02	-49.03	5.29	7.71	2.15	-48.76	-13.00	35.76	V
7494.01	-50.88	8.38	12.19	2.15	-49.22	-13.00	36.22	V
8075.01	-51.79	8.32	12.66	2.15	-49.60	-13.00	36.60	H
9014.00	-51.02	9.16	13.11	2.15	-49.22	-13.00	36.22	V
9968.00	-50.59	9.15	12.93	2.15	-48.96	-13.00	35.96	H

LTE Band 41, 5MHz, QPSK, Channel 39675

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
4993.02	-58.17	6.62	9.89	-54.90	-25.00	29.90	H
7495.01	-54.13	8.38	12.19	-50.32	-25.00	25.32	H
9997.01	-45.51	9.18	12.90	-41.79	-25.00	16.79	V
12491.01	-49.94	10.20	13.20	-46.94	-25.00	21.94	V
14987.00	-45.79	11.21	14.01	-42.99	-25.00	17.99	H
17486.00	-44.03	12.69	14.87	-41.85	-25.00	16.85	H

LTE Band 41, 5MHz, QPSK, Channel 40620

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
6471.02	-55.43	7.54	10.97	-52.00	-25.00	27.00	H
7785.01	-54.32	8.31	12.43	-50.20	-25.00	25.20	H
10396.01	-50.39	9.79	13.06	-47.12	-25.00	22.12	H
12959.01	-49.63	10.48	13.48	-46.63	-25.00	21.63	H
15570.00	-45.04	11.50	13.70	-42.84	-25.00	17.84	V
16853.00	-42.32	12.05	13.74	-40.63	-25.00	15.63	V

LTE Band 41, 5MHz, QPSK, Channel 41565

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5352.02	-57.51	6.93	10.39	-54.05	-25.00	29.05	H
8065.01	-53.61	8.32	12.65	-49.28	-25.00	24.28	V
10729.01	-51.07	9.38	13.15	-47.30	-25.00	22.30	H
13435.01	-48.15	10.59	14.11	-44.63	-25.00	19.63	V
16119.00	-45.37	11.83	13.68	-43.52	-25.00	18.52	H
17487.00	-42.78	12.69	14.87	-40.60	-25.00	15.60	H

LTE Band 66, 1.4MHz QPSK, Channel 131979

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3419.02	-58.13	5.38	8.01	-55.50	-13.00	42.50	H
5135.02	-57.65	6.86	10.09	-54.42	-13.00	41.42	H
6844.01	-55.57	7.83	11.41	-51.99	-13.00	38.99	V
8558.01	-54.45	8.57	13.01	-50.01	-13.00	37.01	H
10265.01	-53.02	9.52	13.01	-49.53	-13.00	36.53	V
11973.01	-50.58	10.18	13.01	-47.75	-13.00	34.75	H

LTE Band 66, 1.4MHz, QPSK, Channel 132322

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.02	-57.70	5.50	8.18	-55.02	-13.00	42.02	H
5231.02	-58.10	7.00	10.22	-54.88	-13.00	41.88	H
6975.01	-55.55	8.11	11.57	-52.09	-13.00	39.09	H
8729.01	-55.36	8.45	13.05	-50.76	-13.00	37.76	H
10469.01	-51.67	9.70	13.09	-48.28	-13.00	35.28	H
12217.01	-48.89	10.05	13.09	-45.85	-13.00	32.85	H

LTE Band 66, 1.4MHz, QPSK, Channel 132665

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3559.02	-57.80	5.92	8.28	-55.44	-13.00	42.44	H
5337.02	-57.93	6.96	10.37	-54.52	-13.00	41.52	V
7122.01	-55.67	8.16	11.75	-52.08	-13.00	39.08	H
8900.01	-49.84	8.85	13.08	-45.61	-13.00	32.61	V
10676.01	-51.82	9.30	13.14	-47.98	-13.00	34.98	H
12451.01	-50.40	10.30	13.18	-47.52	-13.00	34.52	H

LTE Band 71, 5MHz, QPSK, Channel 133147

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1350.01	-60.61	3.17	4.72	2.15	-61.21	-13.00	48.21	H
1997.01	-47.31	4.04	4.61	2.15	-48.89	-13.00	35.89	H
2635.00	-52.30	4.73	6.34	2.15	-52.84	-13.00	39.84	H
3333.02	-54.30	5.30	7.80	2.15	-53.95	-13.00	40.95	H
4020.02	-55.15	6.05	8.92	2.15	-54.43	-13.00	41.43	H
4676.02	-54.69	6.49	9.58	2.15	-53.75	-13.00	40.75	V

LTE Band 71, 5MHz, QPSK, Channel 133297

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361.01	-59.92	3.19	4.78	2.15	-60.48	-13.00	47.48	H
2042.00	-33.65	4.14	4.73	2.15	-35.21	-13.00	22.21	V
2728.00	-52.31	4.81	6.51	2.15	-52.76	-13.00	39.76	H
3415.02	-55.14	5.38	8.00	2.15	-54.67	-13.00	41.67	H
4089.02	-55.11	6.04	8.99	2.15	-54.31	-13.00	41.31	H
4752.01	-55.01	6.58	9.65	2.15	-54.09	-13.00	41.09	V

LTE Band 71, 5MHz, QPSK, Channel 133447

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1391.01	-56.90	3.22	4.93	2.15	-57.34	-13.00	44.34	V
2087.00	-41.13	4.18	4.86	2.15	-42.60	-13.00	29.60	H
2809.00	-52.91	4.93	6.66	2.15	-53.33	-13.00	40.33	H
3456.02	-55.04	5.44	8.09	2.15	-54.54	-13.00	41.54	H
4166.02	-55.71	6.13	9.07	2.15	-54.92	-13.00	41.92	V
4839.01	-55.36	6.71	9.74	2.15	-54.48	-13.00	41.48	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16$ dB, $k = 2$.

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE Bands 7,12,25,26,41,66,71, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.3VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2 Measurement results

LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	-7.64	-13.03	0.0030	0.0051
3.8		-10.80	-11.67	0.0043	0.0046
4.3		-7.20	-11.62	0.0028	0.0046

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	-7.72	-11.74	0.0030	0.0046
40		-9.90	-10.76	0.0039	0.0042
30		-8.75	-10.46	0.0035	0.0041
20		-7.75	-12.57	0.0031	0.0050
10		-9.24	-13.52	0.0036	0.0053
0		-10.97	-11.90	0.0043	0.0047
-10		-8.84	-12.86	0.0035	0.0051
-20		-9.80	-12.06	0.0039	0.0048
-30		-7.97	-13.39	0.0031	0.0053

LTE Band 12, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	-3.30	-12.73	0.0047	0.0180
3.8		-3.96	-13.39	0.0056	0.0189
4.3		-3.23	-12.77	0.0046	0.0180

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	-2.63	-11.73	0.0037	0.0166
40		-3.12	-12.15	0.0044	0.0172
30		-2.32	-11.20	0.0033	0.0158
20		2.27	-11.87	0.0032	0.0168
10		-3.02	-11.57	0.0043	0.0164
0		-2.32	-12.15	0.0033	0.0172
-10		-3.42	-12.80	0.0048	0.0181
-20		-2.52	-12.25	0.0036	0.0173
-30		-3.82	-11.87	0.0054	0.0168

LTE Band 25, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	4.61	25.11	0.0024	0.0133
3.8		3.49	23.22	0.0019	0.0123
4.3		5.19	23.80	0.0028	0.0126

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	4.23	-22.16	0.0022	0.0118
40		6.55	24.85	0.0035	0.0132
30		4.51	23.57	0.0024	0.0125
20		-3.63	22.95	0.0019	0.0122
10		4.73	-23.35	0.0025	0.0124
0		5.44	-24.33	0.0029	0.0129
-10		5.49	-23.99	0.0029	0.0127
-20		5.12	26.48	0.0027	0.0141
-30		4.38	24.92	0.0023	0.0132

LTE Band 26(814MHz~824MHz), 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	-4.32	-24.96	0.0053	0.0305
3.8		-4.11	-24.55	0.0050	0.0300
4.3		-4.26	-25.48	0.0052	0.0311

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	-5.18	-25.68	0.0063	0.0314
40		-3.91	-24.86	0.0048	0.0304
30		-3.42	-24.75	0.0042	0.0302
20		-4.62	-25.92	0.0056	0.0316
10		-3.40	-26.29	0.0042	0.0321
0		-4.49	-24.89	0.0055	0.0304
-10		-4.16	-26.35	0.0051	0.0322
-20		-2.66	-26.41	0.0032	0.0322
-30		-5.28	-24.98	0.0064	0.0305

LTE Band 26(824MHz~849MHz), 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	-3.00	-24.76	0.0036	0.0296
3.8		-2.70	-24.68	0.0032	0.0295
4.3		-3.59	-24.42	0.0043	0.0292

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	-2.50	-25.13	0.0030	0.0300
40		-3.26	-26.01	0.0039	0.0311
30		-2.66	-23.52	0.0032	0.0281
20		-3.66	-24.20	0.0044	0.0289
10		1.99	-24.15	0.0024	0.0289
0		-2.57	-24.95	0.0031	0.0298
-10		-4.29	-23.57	0.0051	0.0282
-20		-2.72	-23.25	0.0033	0.0278
-30		-2.83	-23.96	0.0034	0.0286

LTE Band 41, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	16.67	22.67	0.0064	0.0087
3.8		17.90	21.23	0.0069	0.0082
4.3		20.79	12.57	0.0080	0.0048

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	16.67	22.67	0.0064	0.0087
40		17.90	21.23	0.0069	0.0082
30		20.79	12.57	0.0080	0.0048
20		17.19	22.34	0.0066	0.0086
10		18.44	17.61	0.0071	0.0068
0		17.15	12.49	0.0066	0.0048
-10		16.81	14.78	0.0065	0.0057
-20		19.17	15.51	0.0074	0.0060
-30		19.38	21.99	0.0075	0.0085

LTE Band 66, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	-5.88	-26.82	0.0034	0.0154
3.8		-8.24	-26.32	0.0047	0.0151
4.3		-4.53	-28.24	0.0026	0.0162

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	-5.88	-26.82	0.0034	0.0154
40		-8.24	-26.32	0.0047	0.0151
30		-4.53	-28.24	0.0026	0.0162
20		-5.69	-26.74	0.0033	0.0153
10		-5.46	-28.22	0.0031	0.0162
0		-5.08	-27.62	0.0029	0.0158
-10		-4.45	-27.97	0.0026	0.0160
-20		-5.94	-25.41	0.0034	0.0146
-30		-7.48	-26.15	0.0043	0.0150

LTE Band 71, 10MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
3.5	20	13.65	20.87	0.0201	0.0307
3.8		14.85	20.13	0.0218	0.0296
4.3		14.32	17.84	0.0210	0.0262

Frequency Error vs Temperature

Temperature (°C)	Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
		QPSK	16QAM	QPSK	16QAM
50	3.8	18.24	18.04	0.0268	0.0265
40		16.38	18.10	0.0241	0.0266
30		17.57	17.84	0.0258	0.0262
20		19.50	19.35	0.0287	0.0284
10		17.11	20.46	0.0251	0.0301
0		17.74	15.64	0.0261	0.0230
-10		17.90	19.21	0.0263	0.0282
-20		17.77	16.12	0.0261	0.0237
-30		16.42	18.11	0.0241	0.0266

A.4 OCCUPIED BANDWIDTH

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	4519.23	4519.23

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

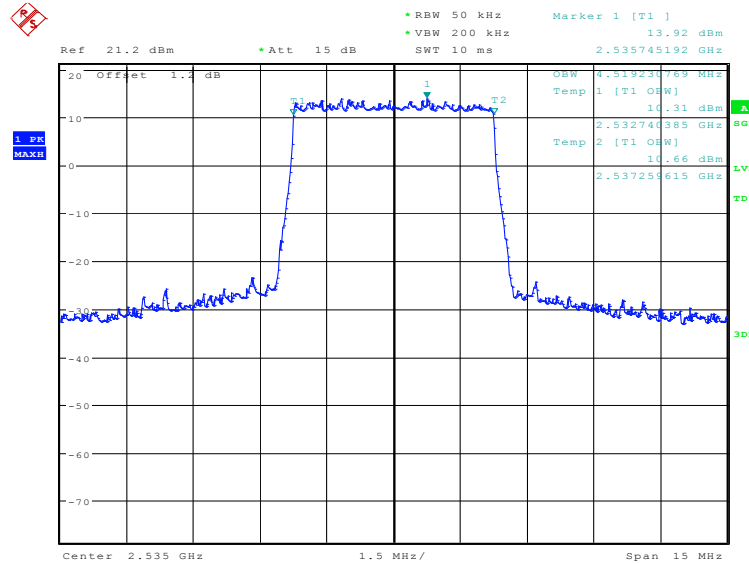

Date: 10.SEP.2019 19:07:01

LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)

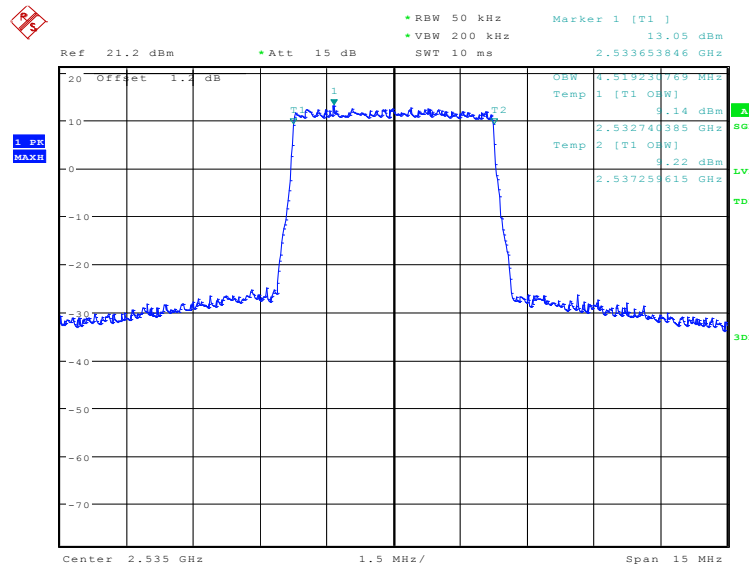


Date: 10.SEP.2019 19:08:26

LTE band 7, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	8942.31	8942.31

LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

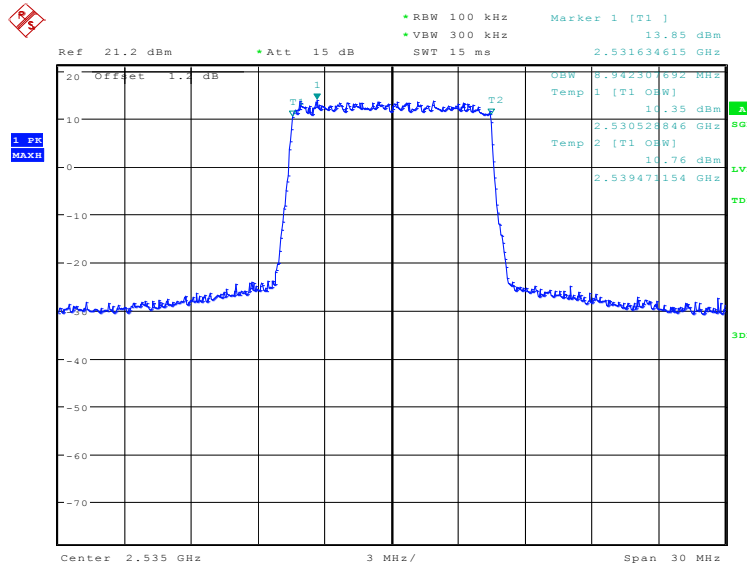

Date: 10.SEP.2019 19:09:52

LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

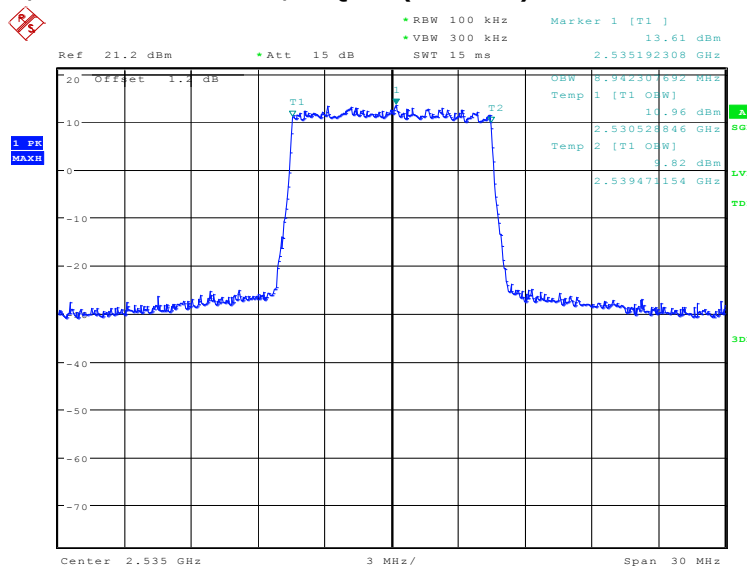


Date: 10.SEP.2019 19:11:17

LTE band 7, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	13485.58	13485.58

LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

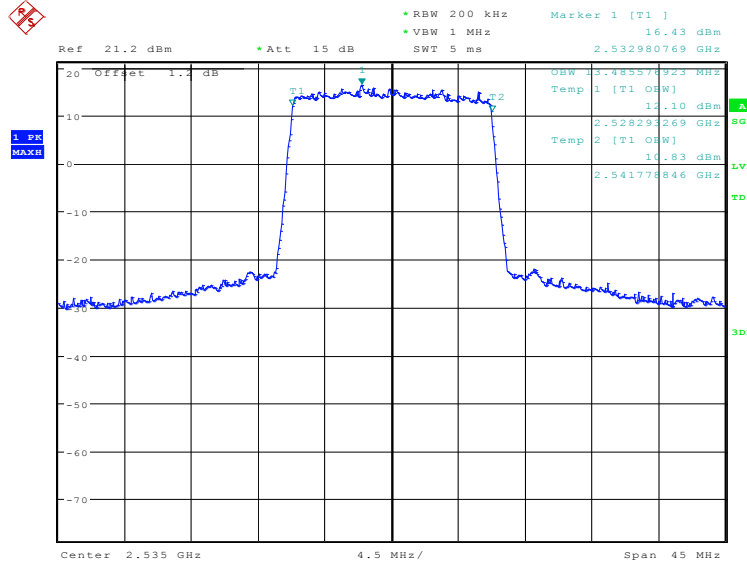

Date: 10.SEP.2019 19:12:43

LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)

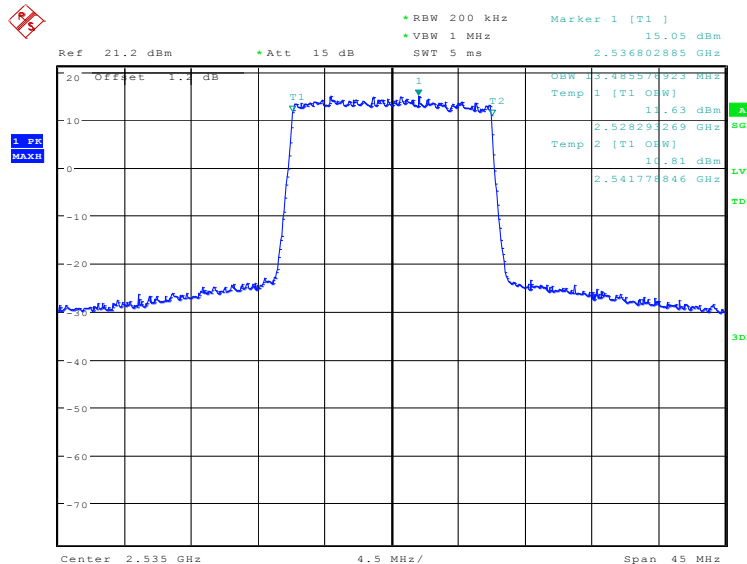

Date: 10.SEP.2019 19:14:08


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2535.0	QPSK	16QAM
	17884.62	17884.62



LTE band 12, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
707.5	QPSK	16QAM
	1097.76	1097.76

LTE band 12, 1.4MHz Bandwidth, QPSK (99% BW)

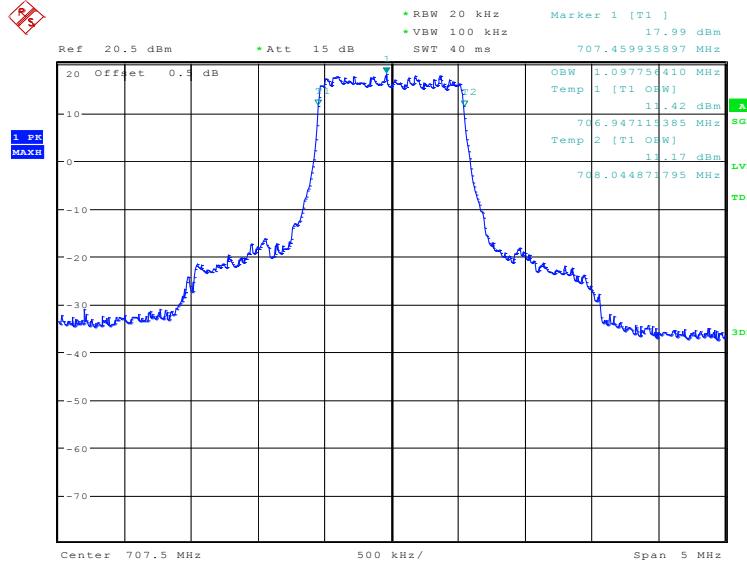

Date: 10.SEP.2019 19:19:13

LTE band 12, 1.4MHz Bandwidth, 16QAM (99% BW)

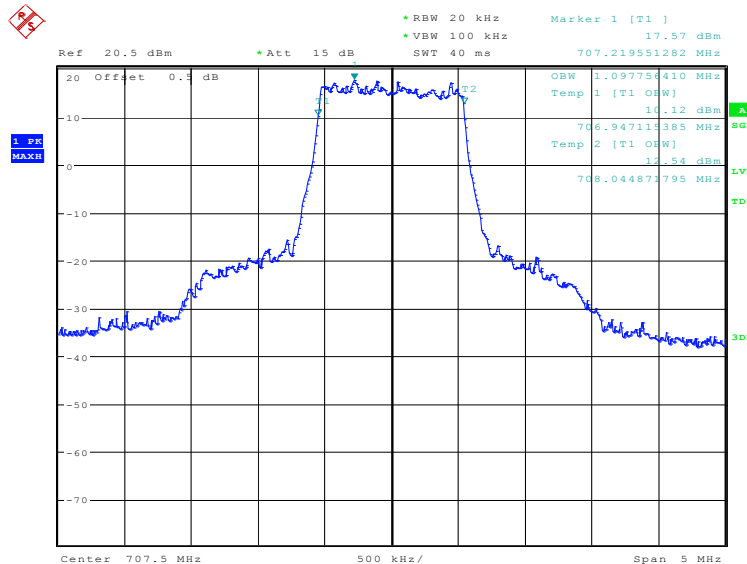


Date: 10.SEP.2019 19:20:38

LTE band 12, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
707.5	QPSK	16QAM
	2692.31	2708.33

LTE band 12, 3MHz Bandwidth, QPSK (99% BW)

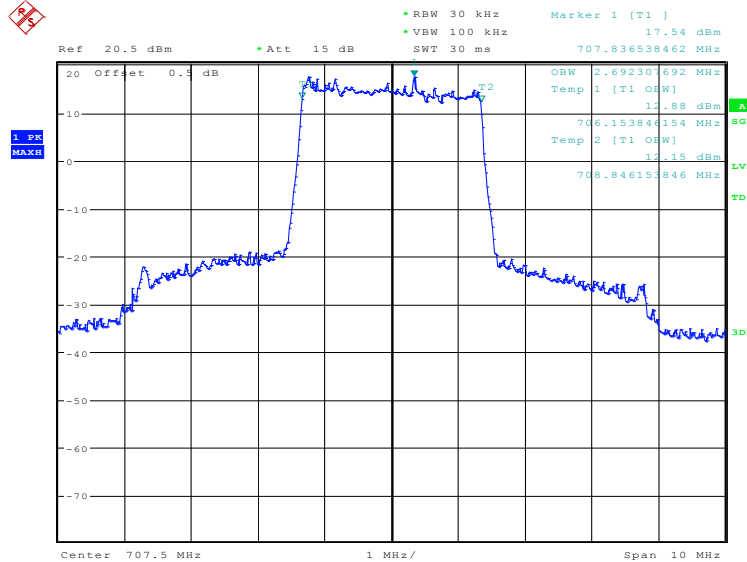

Date: 10.SEP.2019 19:22:04

LTE band 12, 3MHz Bandwidth, 16QAM (99% BW)

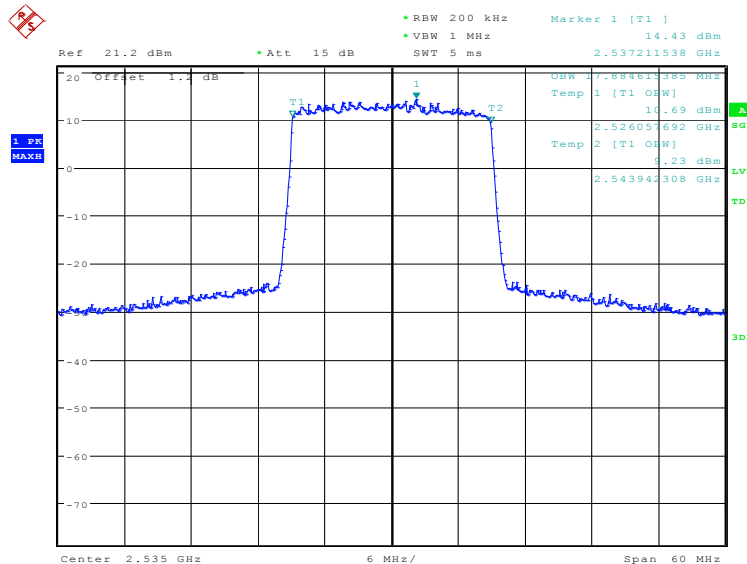


Date: 10.SEP.2019 19:16:59

LTE band 12, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
707.5	QPSK	16QAM
	4519.23	4495.19

LTE band 12, 5MHz Bandwidth, QPSK (99% BW)

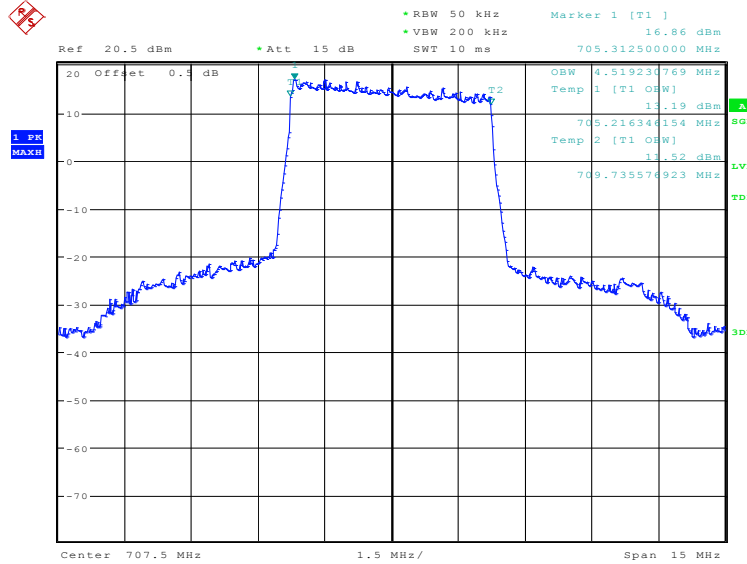

Date: 10.SEP.2019 19:24:55

LTE band 12, 5MHz Bandwidth, 16QAM (99% BW)

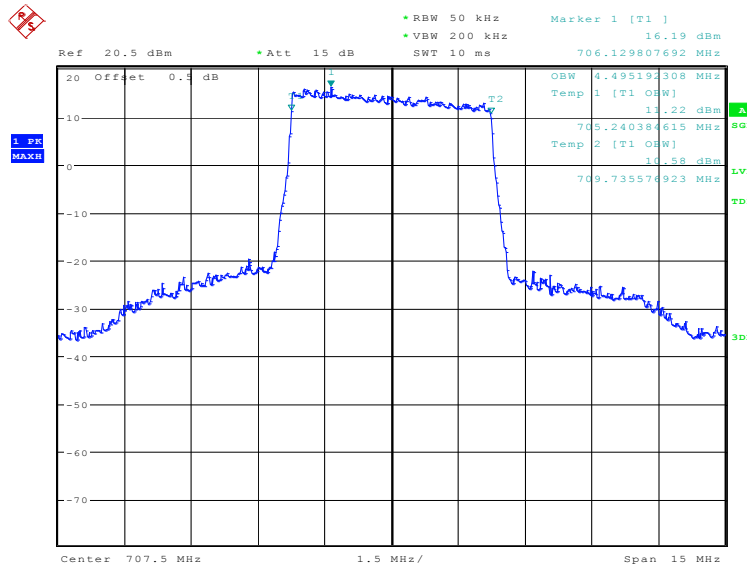


Date: 10.SEP.2019 19:26:19

LTE band 12, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
707.5	QPSK	16QAM
	8942.31	8942.31

LTE band 12, 10MHz Bandwidth, QPSK (99% BW)

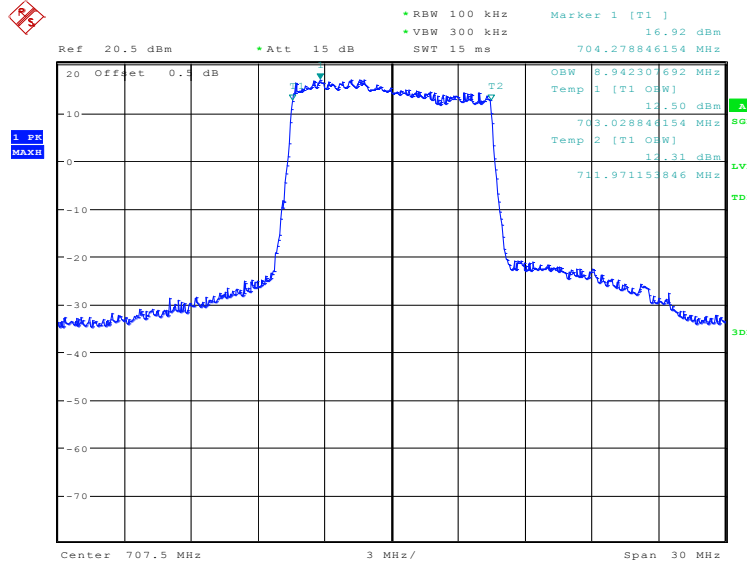

Date: 10.SEP.2019 19:27:46

LTE band 12, 10MHz Bandwidth, 16QAM (99% BW)

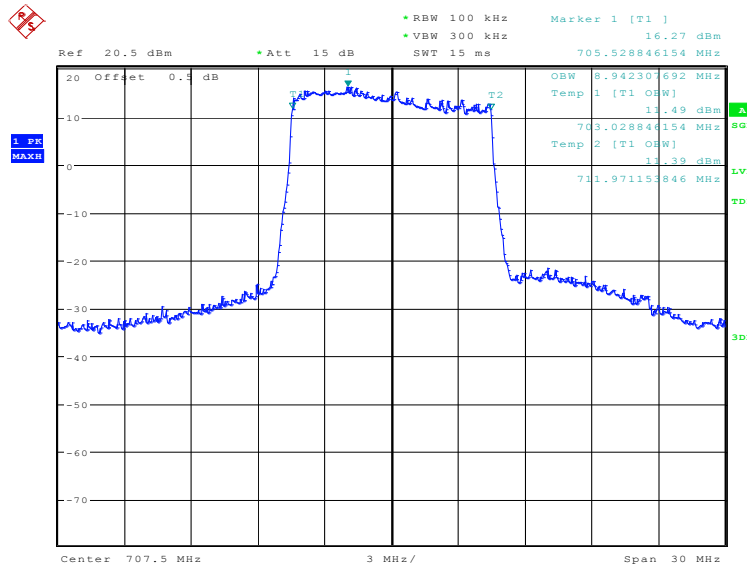


Date: 10.SEP.2019 19:29:10

LTE band 25, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1882.5	QPSK	16QAM
	1089.74	1097.76

LTE band 25, 1.4MHz Bandwidth, QPSK (99% BW)

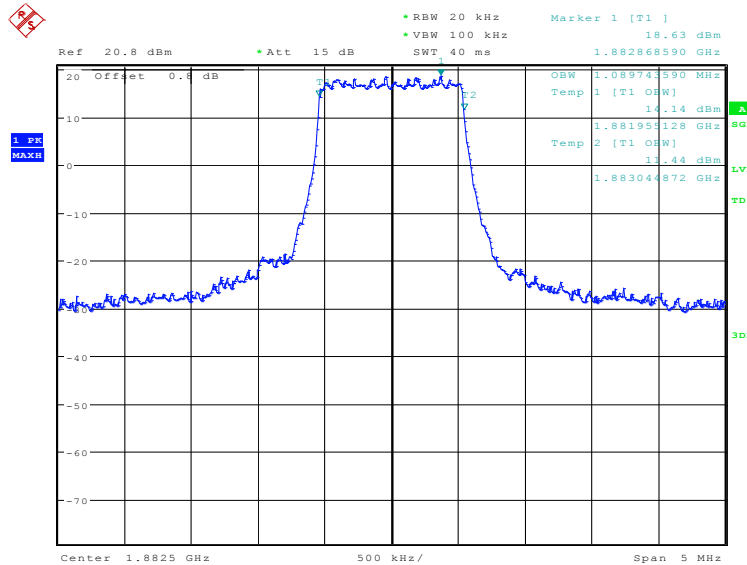

Date: 11.SEP.2019 16:34:04

LTE band 25, 1.4MHz Bandwidth, 16QAM (99% BW)

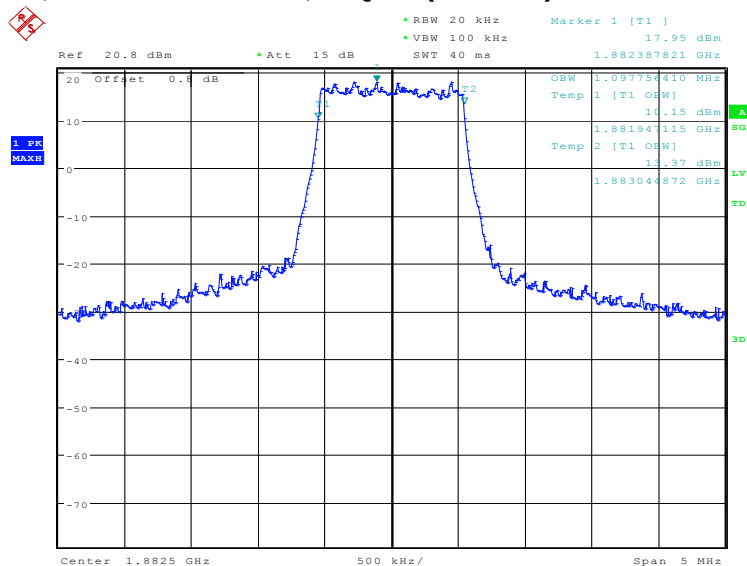


Date: 11.SEP.2019 16:35:28

LTE band 25, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1882.5	QPSK	16QAM
	2692.31	2708.33

LTE band 25, 3MHz Bandwidth, QPSK (99% BW)

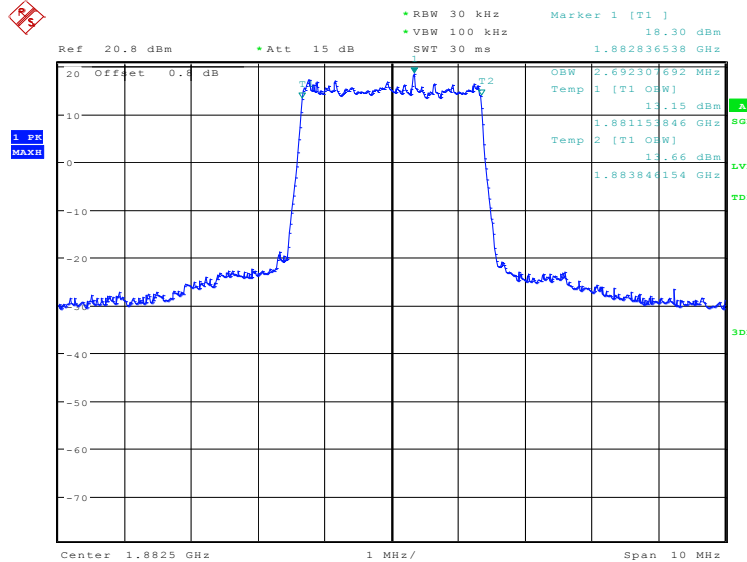

Date: 11.SEP.2019 16:36:54

LTE band 25, 3MHz Bandwidth, 16QAM (99% BW)

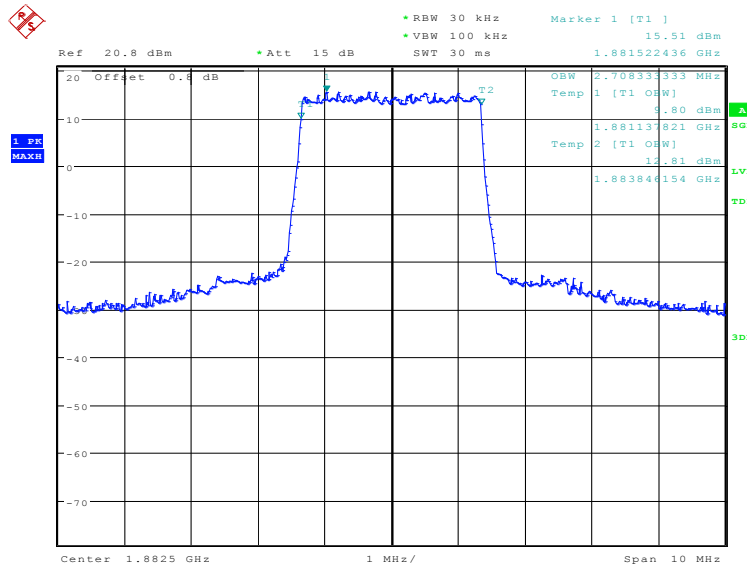


Date: 11.SEP.2019 16:38:18

LTE band 25, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1882.5	QPSK	16QAM
	4519.23	4519.23

LTE band 25, 5MHz Bandwidth, QPSK (99% BW)

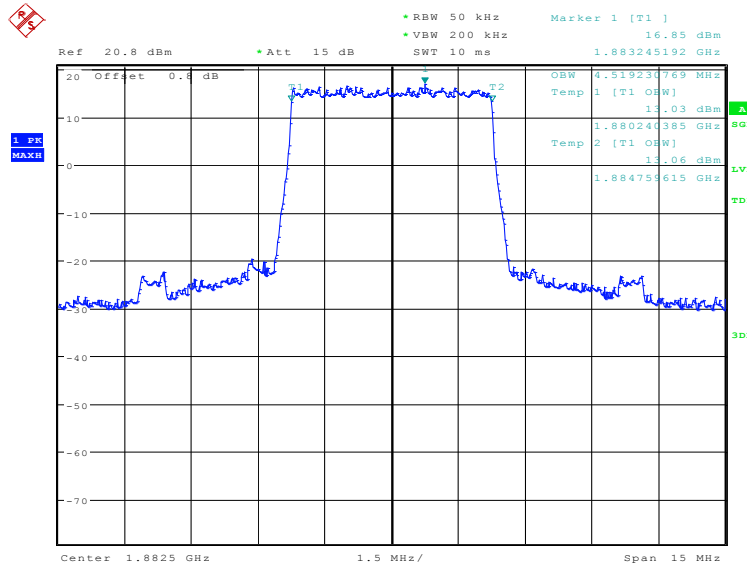

Date: 11.SEP.2019 16:39:44

LTE band 25, 5MHz Bandwidth, 16QAM (99% BW)

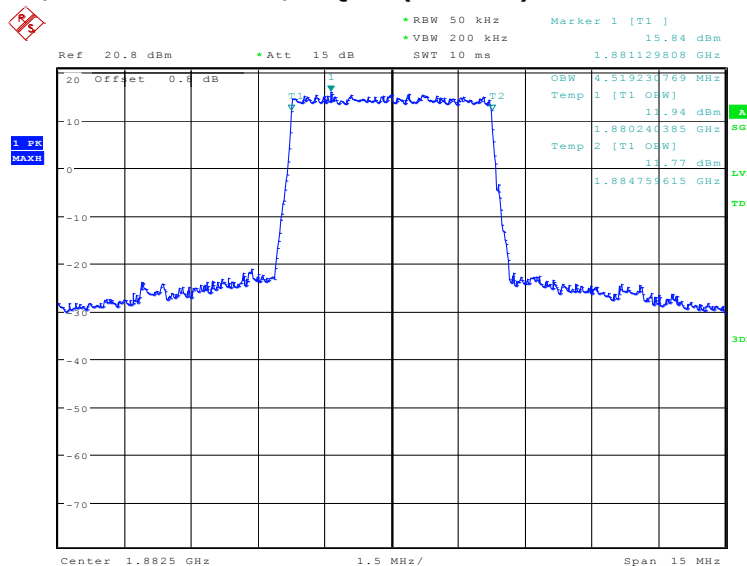


Date: 11.SEP.2019 16:41:08

LTE band 25, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1882.5	QPSK	16QAM
	8990.38	8942.31

LTE band 25, 10MHz Bandwidth, QPSK (99% BW)

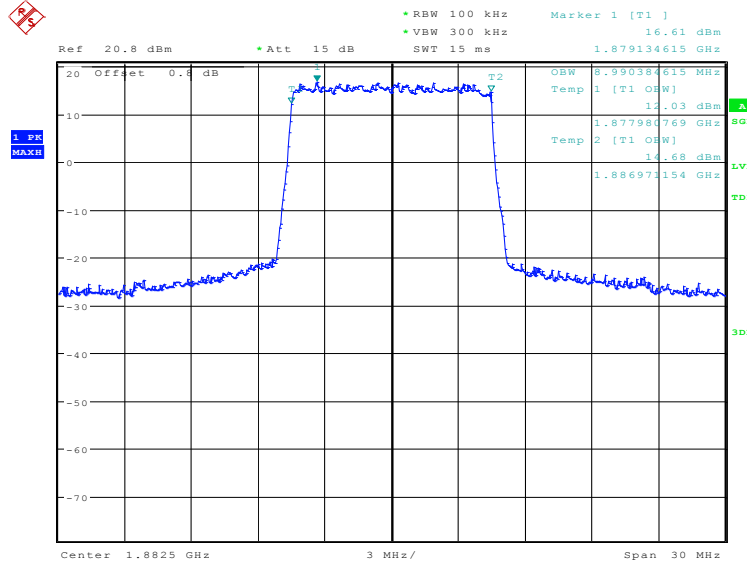

Date: 11.SEP.2019 16:42:34

LTE band 25, 10MHz Bandwidth, 16QAM (99% BW)

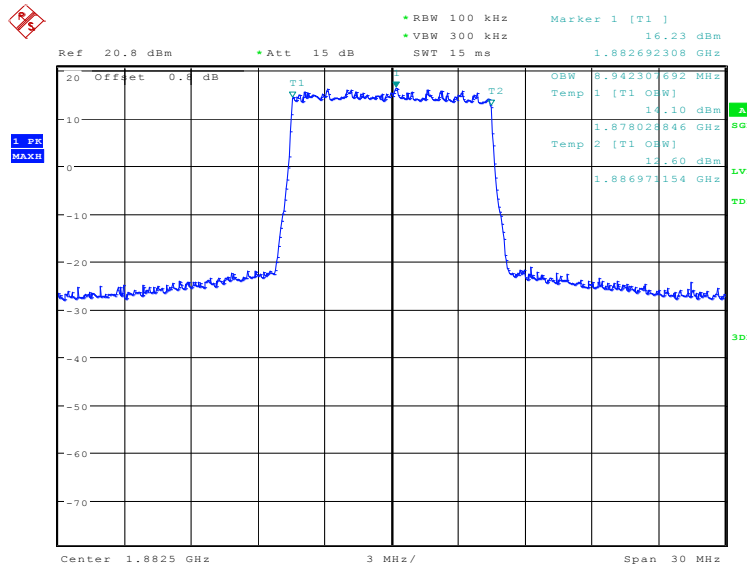


Date: 11.SEP.2019 16:43:59

LTE band 25, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1882.5	QPSK	16QAM
	13485.58	13413.46

LTE band 25, 15MHz Bandwidth, QPSK (99% BW)

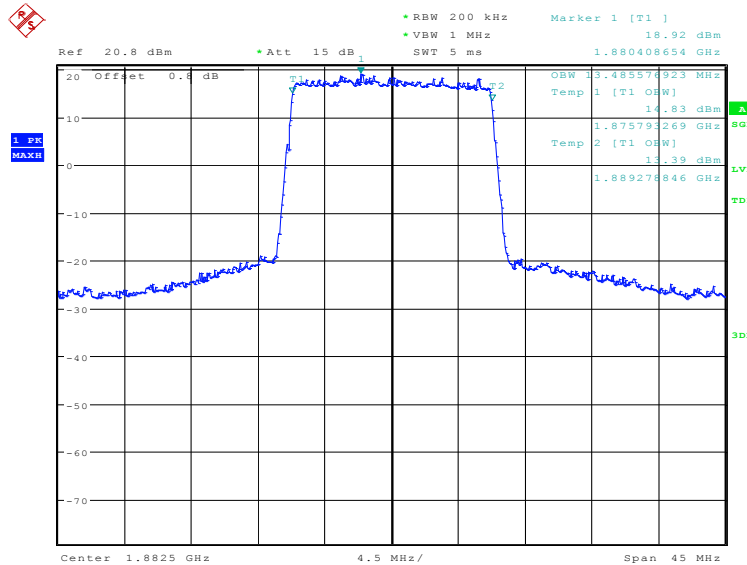

Date: 11.SEP.2019 16:45:25

LTE band 25, 15MHz Bandwidth, 16QAM (99% BW)

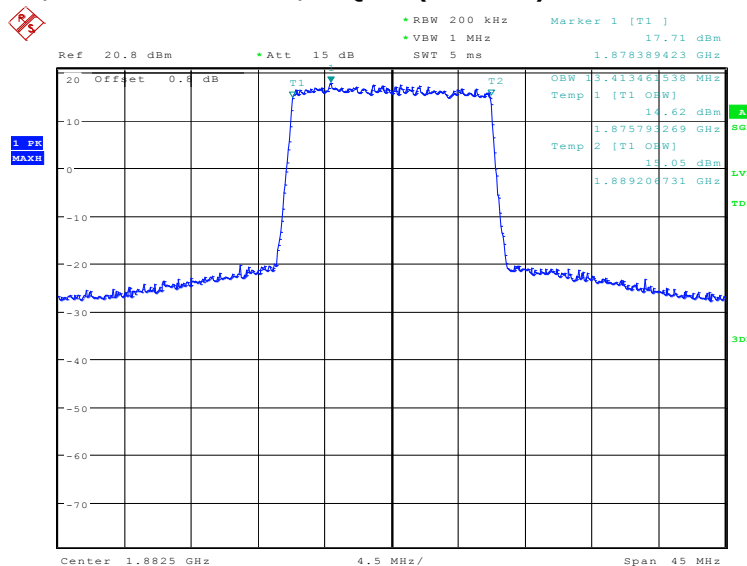


Date: 11.SEP.2019 16:46:49

LTE band 25, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1882.5	QPSK	16QAM
	17884.62	17884.62

LTE band 25, 20MHz Bandwidth, QPSK (99% BW)

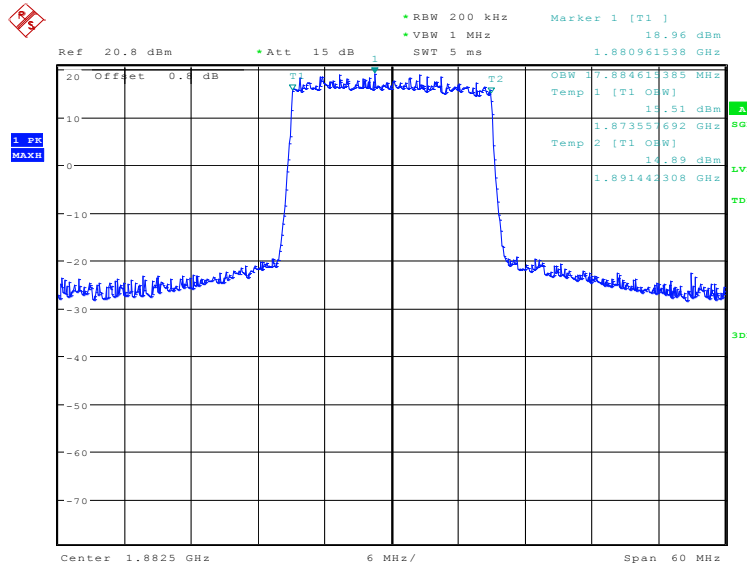

Date: 11.SEP.2019 16:48:14

LTE band 25, 20MHz Bandwidth, 16QAM (99% BW)

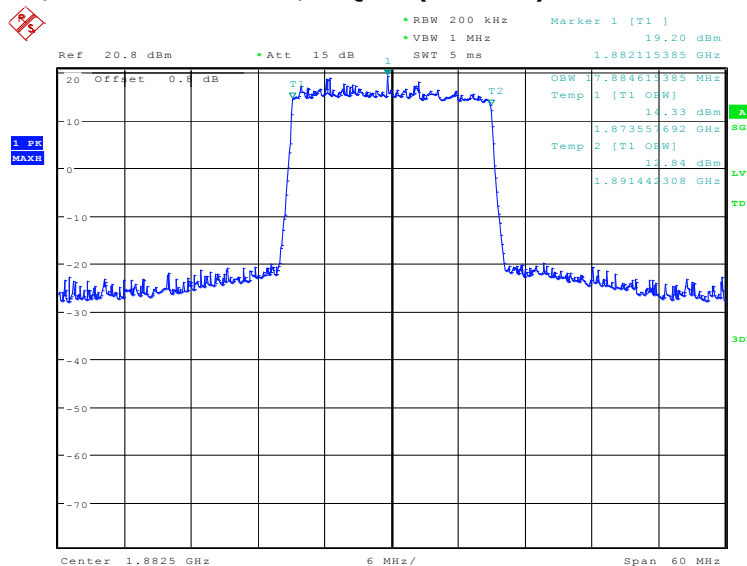


Date: 11.SEP.2019 16:49:38

LTE band 26(814MHz~824MHz), 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
819.0	QPSK	16QAM
	1097.76	1105.77

LTE band 26(814MHz~824MHz), 1.4MHz Bandwidth, QPSK (99% BW)

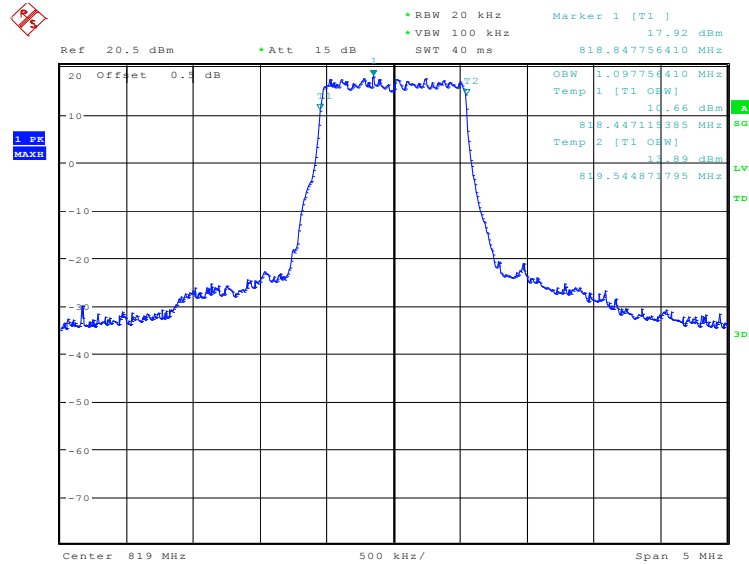

Date: 10.SEP.2019 19:45:25

LTE band 26(814MHz~824MHz), 1.4MHz Bandwidth, 16QAM (99% BW)

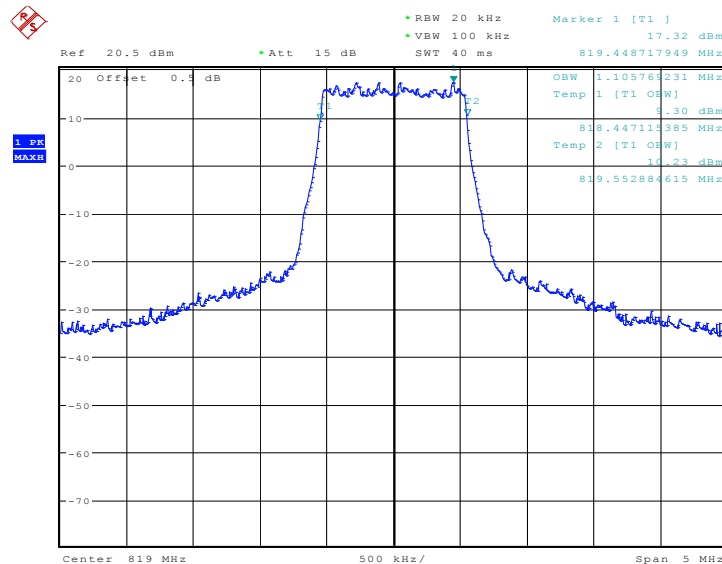


Date: 10.SEP.2019 19:46:49

LTE band 26(814MHz~824MHz), 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
819.0	QPSK	16QAM
	2692.31	2692.31

LTE band 26(814MHz~824MHz), 3MHz Bandwidth, QPSK (99% BW)

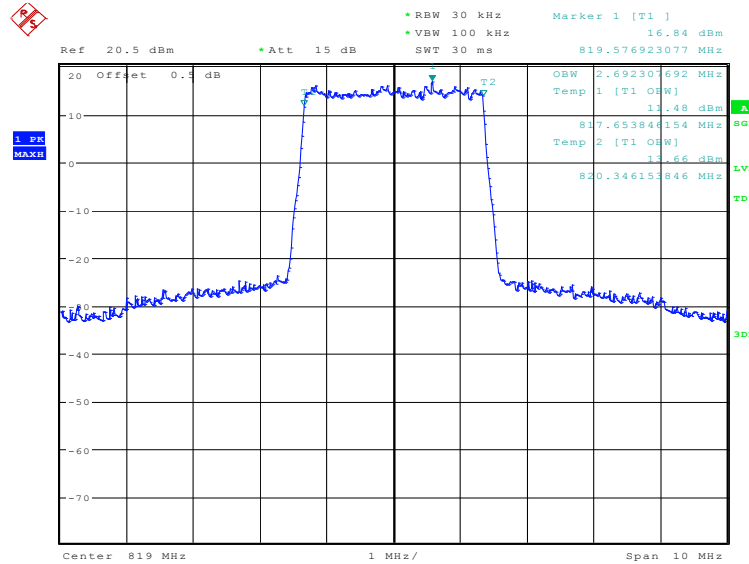

Date: 10.SEP.2019 19:48:15

LTE band 26(814MHz~824MHz), 3MHz Bandwidth, 16QAM (99% BW)

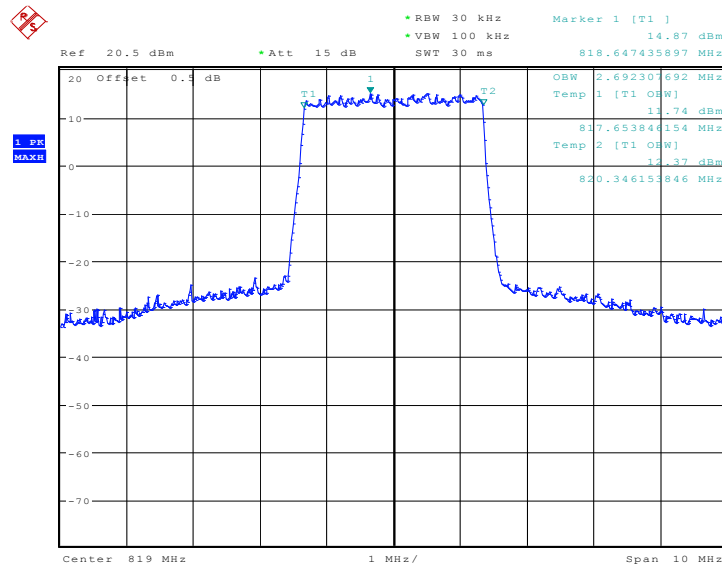


Date: 10.SEP.2019 19:49:39

LTE band 26(814MHz~824MHz), 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
819.0	QPSK	16QAM
	4495.19	4495.19

LTE band 26(814MHz~824MHz), 5MHz Bandwidth, QPSK (99% BW)

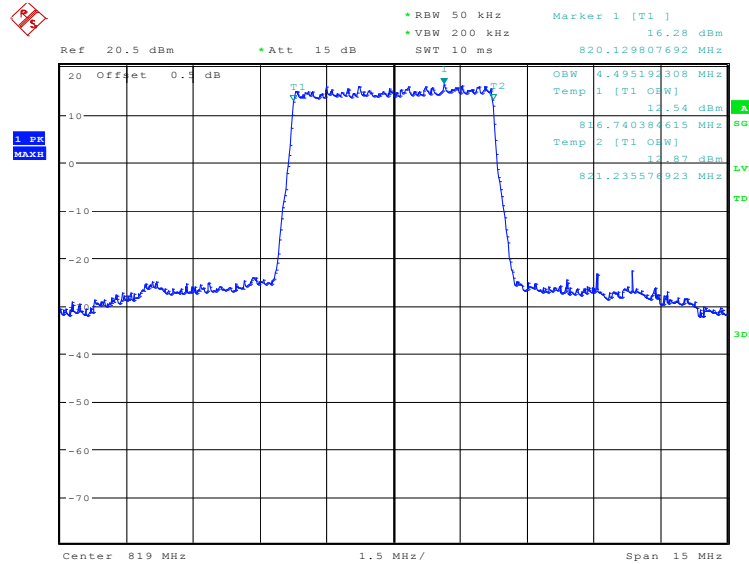

Date: 10.SEP.2019 19:51:04

LTE band 26(814MHz~824MHz), 5MHz Bandwidth, 16QAM (99% BW)

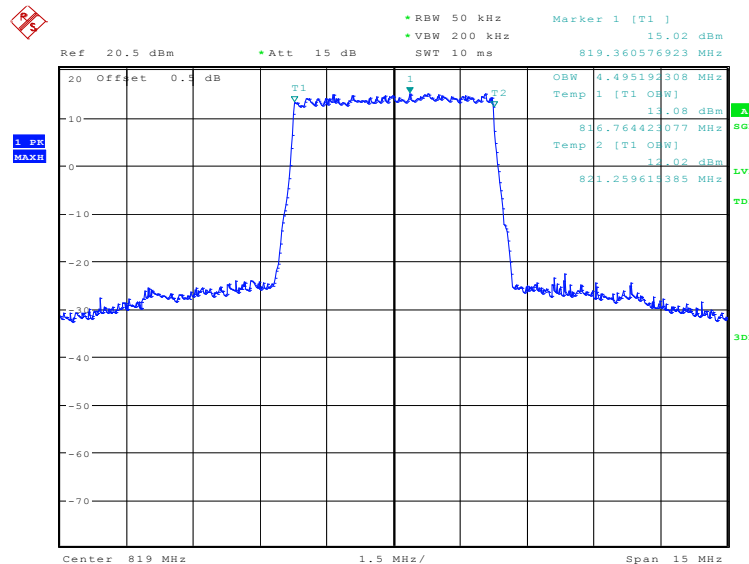


Date: 10.SEP.2019 19:52:28

LTE band 26(814MHz~824MHz), 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
819.0	QPSK	16QAM
	8990.38	8990.38

LTE band 26(814MHz~824MHz), 10MHz Bandwidth, QPSK (99% BW)

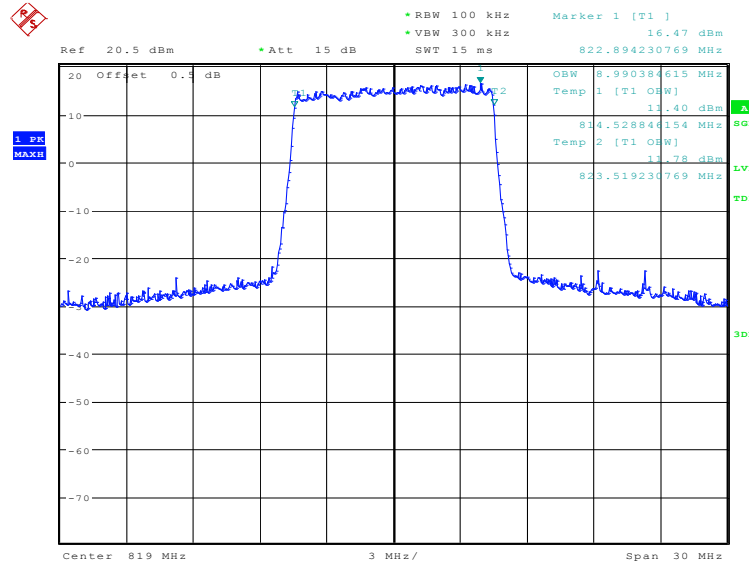

Date: 10.SEP.2019 19:53:54

LTE band 26(814MHz~824MHz), 10MHz Bandwidth, 16QAM (99% BW)

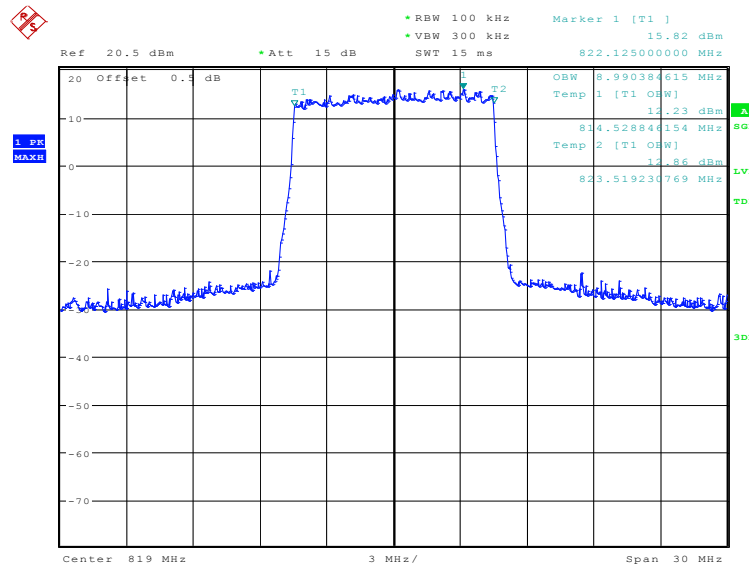


Date: 10.SEP.2019 19:55:18

LTE band 26(824MHz~849MHz), 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	1097.76	1105.77

LTE band 26(824MHz~849MHz), 1.4MHz Bandwidth, QPSK (99% BW)

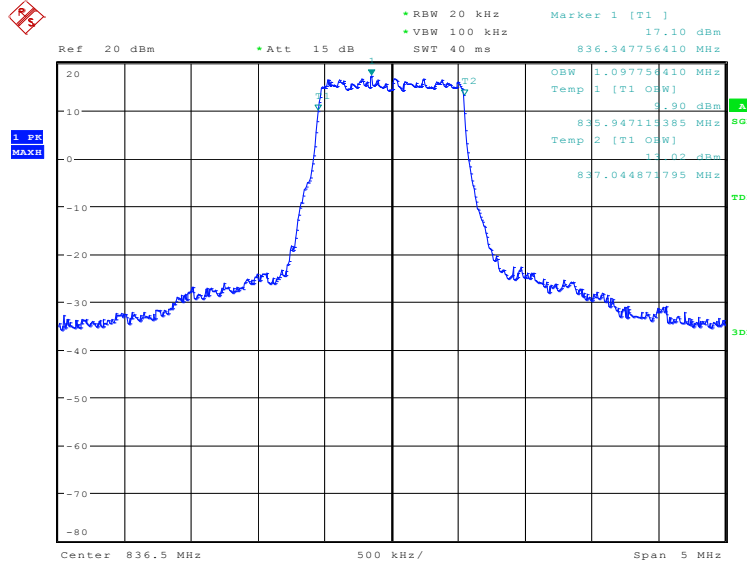

Date: 10.SEP.2019 19:30:39

LTE band 26(824MHz~849MHz), 1.4MHz Bandwidth, 16QAM (99% BW)

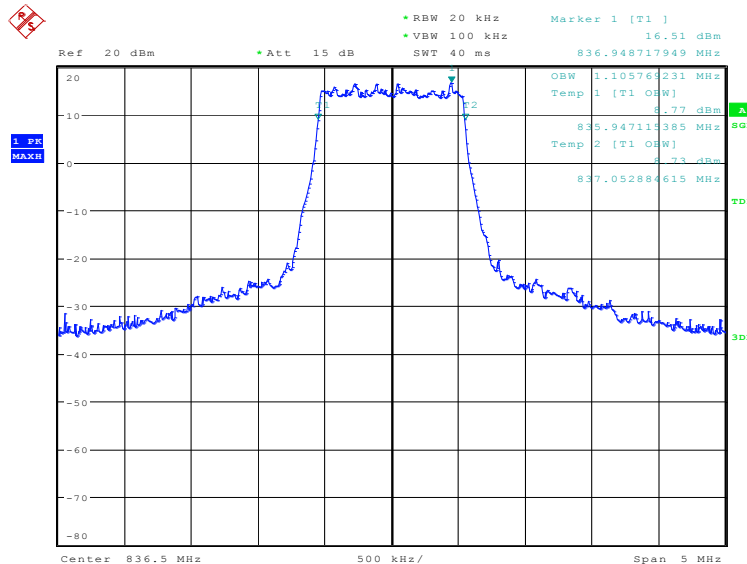


Date: 10.SEP.2019 19:32:03

LTE band 26(824MHz~849MHz), 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	2692.31	2692.31

LTE band 26(824MHz~849MHz), 3MHz Bandwidth, QPSK (99% BW)

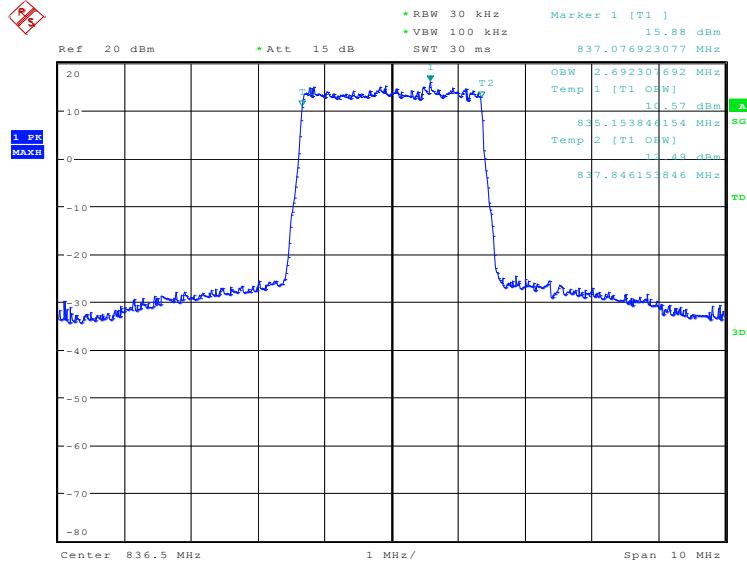

Date: 10.SEP.2019 19:33:29

LTE band 26(824MHz~849MHz), 3MHz Bandwidth, 16QAM (99% BW)

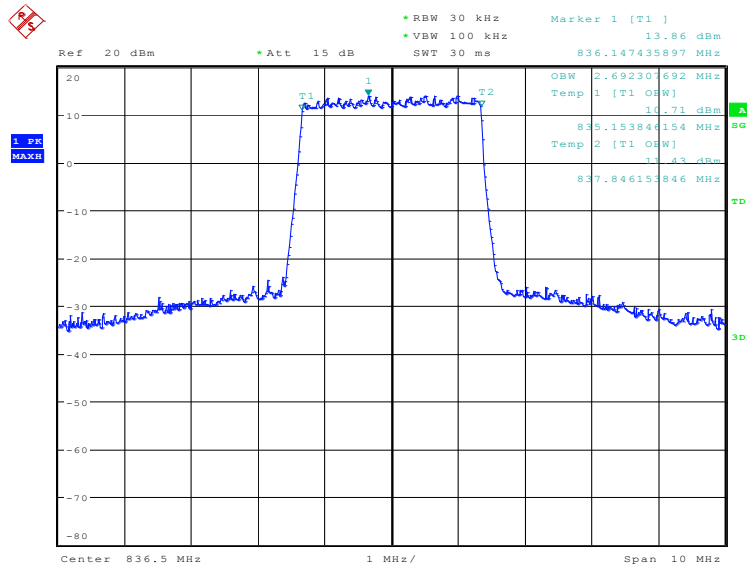


Date: 10.SEP.2019 19:34:52

LTE band 26(824MHz~849MHz), 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	4519.23	4495.19

LTE band 26(824MHz~849MHz), 5MHz Bandwidth, QPSK (99% BW)

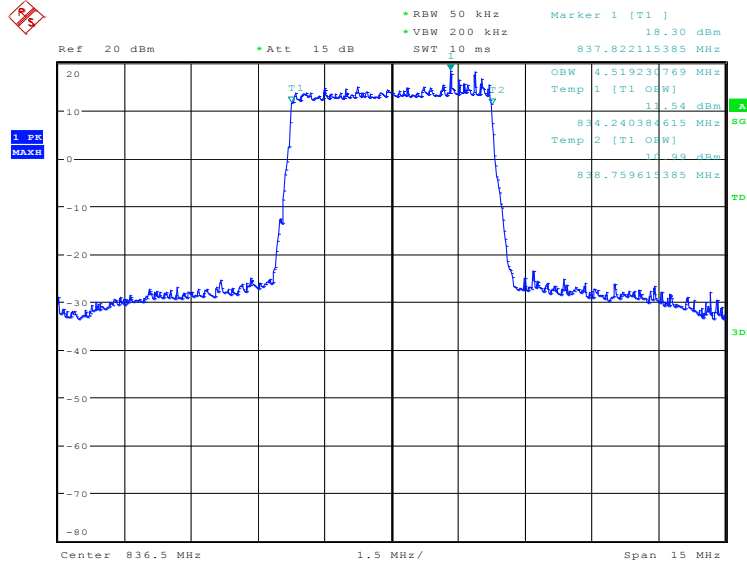

Date: 10.SEP.2019 19:36:18

LTE band 26(824MHz~849MHz), 5MHz Bandwidth, 16QAM (99% BW)

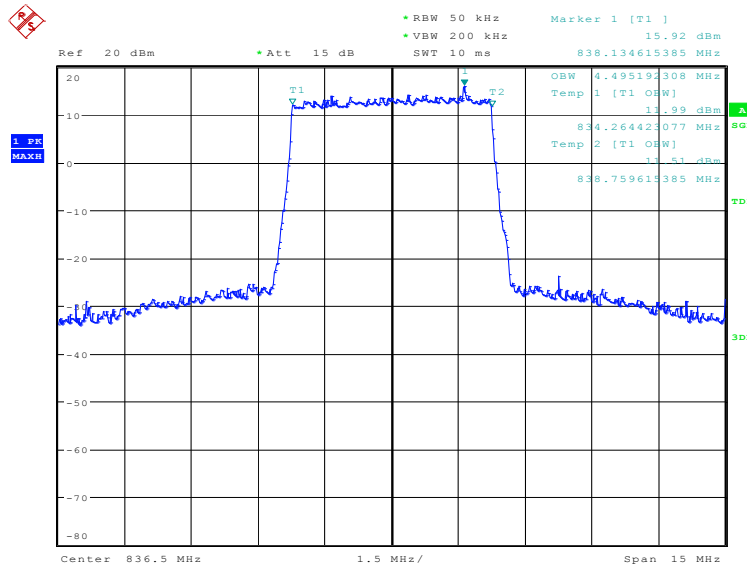


Date: 10.SEP.2019 19:37:42

LTE band 26(824MHz~849MHz), 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	8942.31	8942.31

LTE band 26(824MHz~849MHz), 10MHz Bandwidth, QPSK (99% BW)

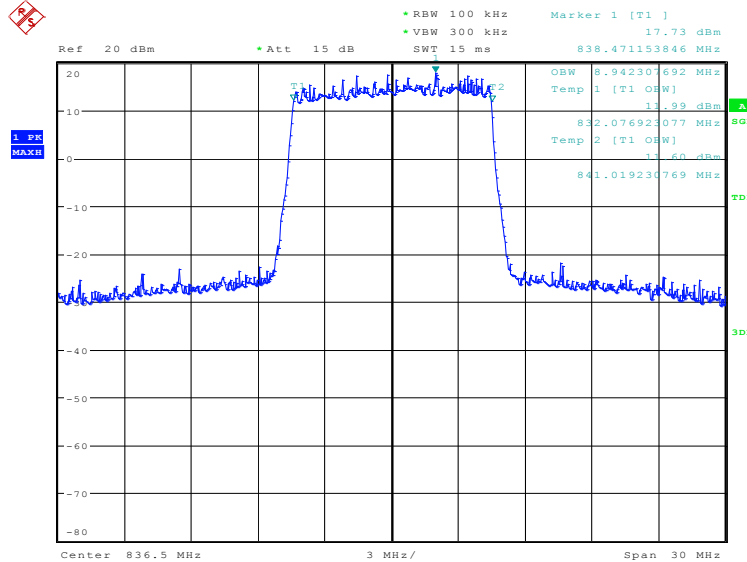

Date: 10.SEP.2019 19:39:08

LTE band 26(824MHz~849MHz), 10MHz Bandwidth, 16QAM (99% BW)

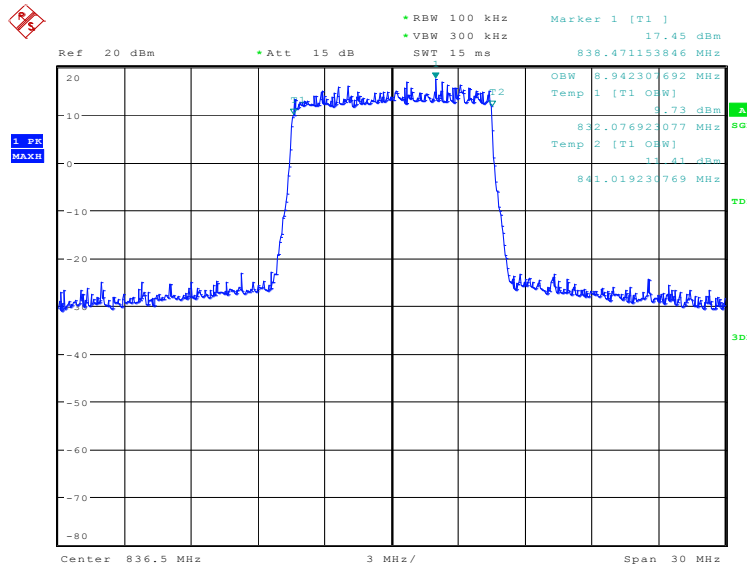


Date: 10.SEP.2019 19:40:32

LTE band 26(824MHz~849MHz), 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
836.5	QPSK	16QAM
	13485.58	13485.58

LTE band 26(824MHz~849MHz), 15MHz Bandwidth, QPSK (99% BW)

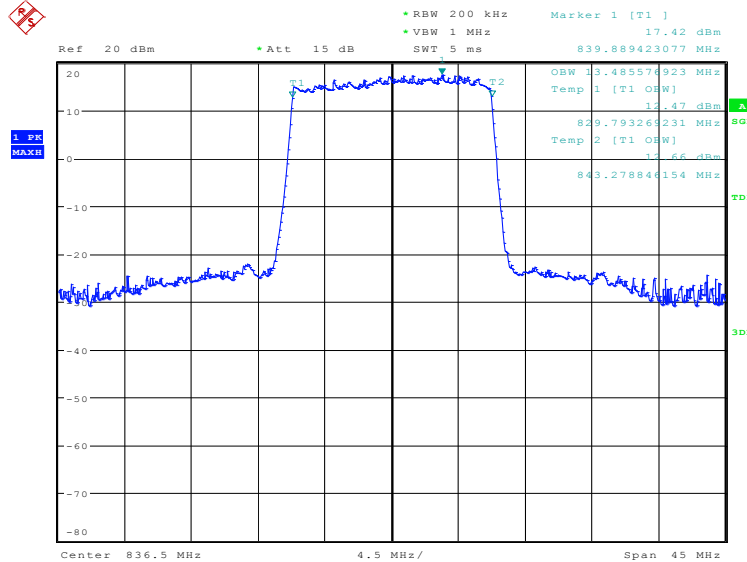

Date: 10.SEP.2019 19:41:57

LTE band 26(824MHz~849MHz), 15MHz Bandwidth, 16QAM (99% BW)

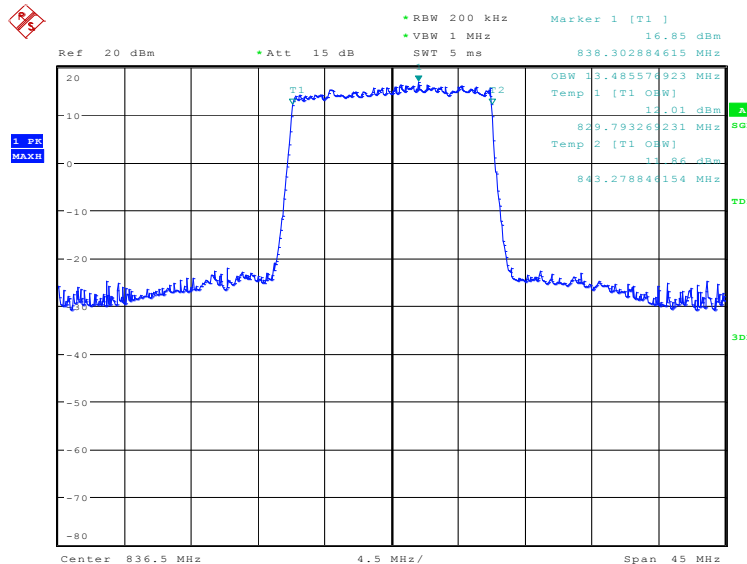


Date: 10.SEP.2019 19:43:21

LTE band 41, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	4519.23	4495.19

LTE band 41, 5MHz Bandwidth, QPSK (99% BW)

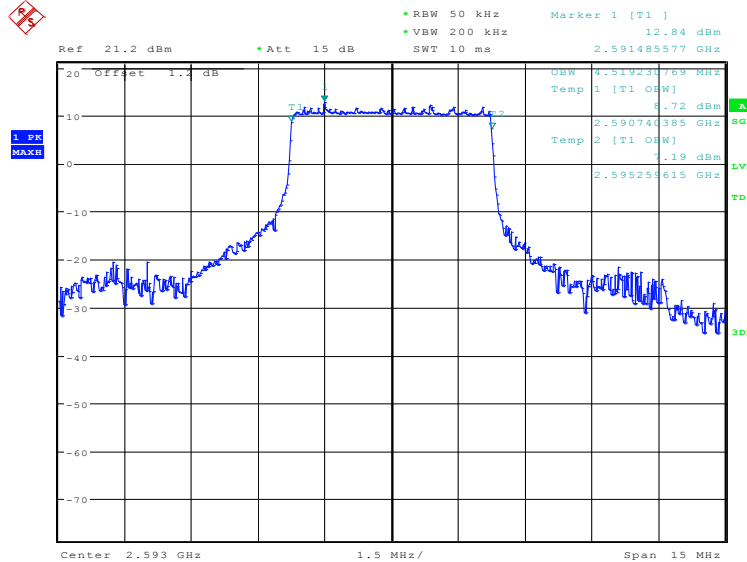

Date: 10.SEP.2019 19:57:23

LTE band 41, 5MHz Bandwidth,16QAM (99% BW)

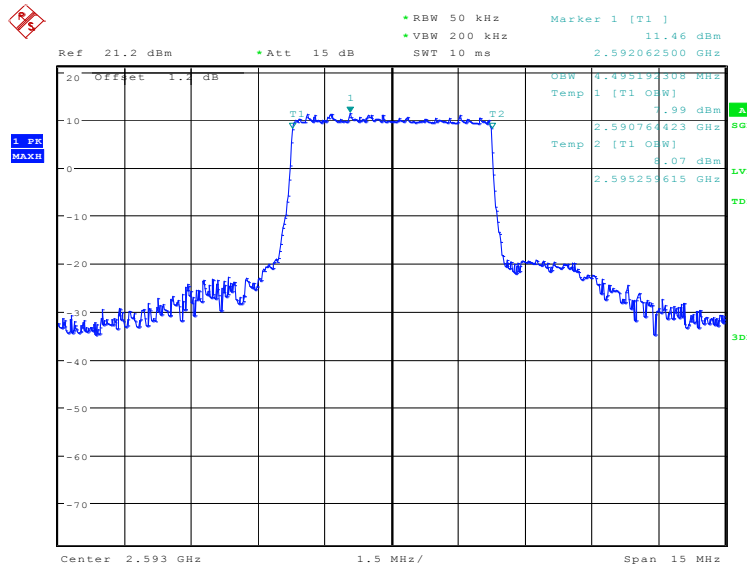


Date: 10.SEP.2019 19:58:47

LTE band 41, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	8942.31	8990.38

LTE band 41, 10MHz Bandwidth, QPSK (99% BW)

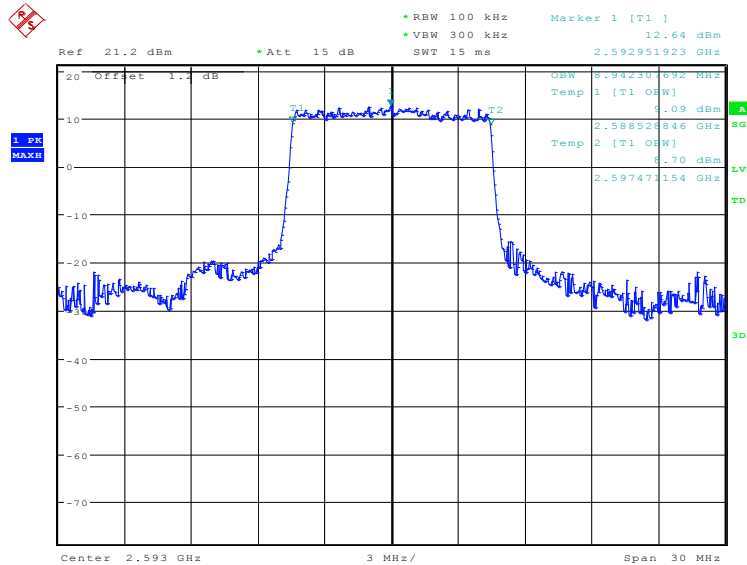

Date: 10.SEP.2019 20:00:13

LTE band 41, 10MHz Bandwidth,16QAM (99% BW)

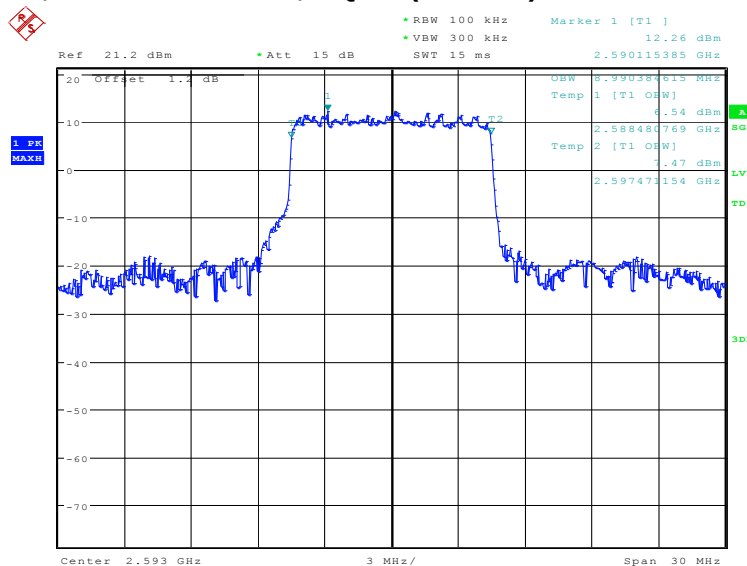


Date: 10.SEP.2019 20:01:37

LTE band 41, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	13557.69	13557.69

LTE band 41, 15MHz Bandwidth, QPSK (99% BW)

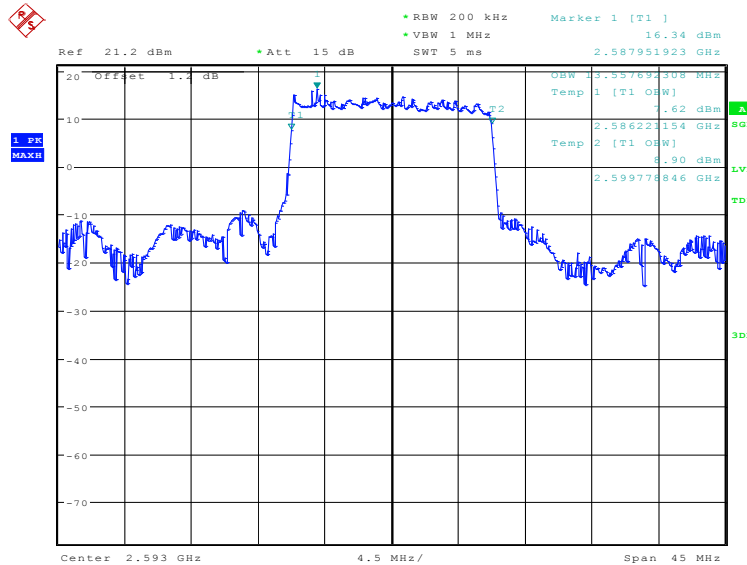

Date: 10.SEP.2019 20:03:04

LTE band 41, 15MHz Bandwidth, 16QAM (99% BW)

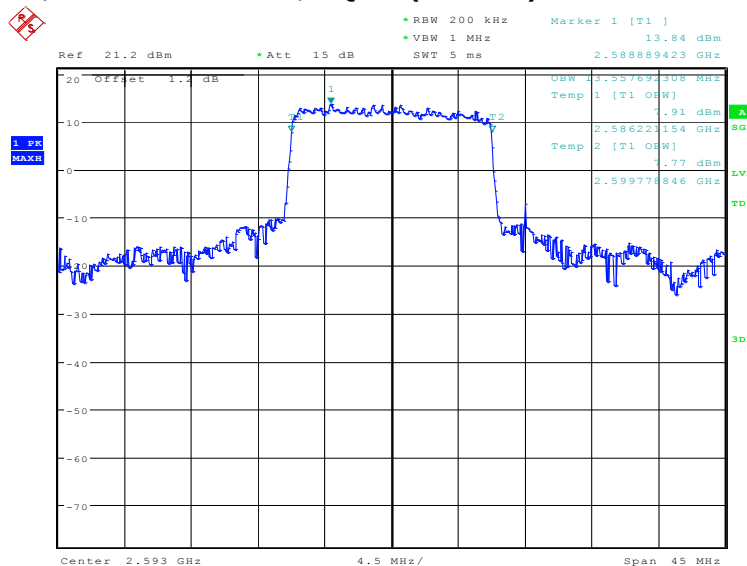


Date: 10.SEP.2019 20:04:28

LTE band 41, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
2593.0	QPSK	16QAM
	17884.62	17980.77

LTE band 41, 20MHz Bandwidth, QPSK (99% BW)

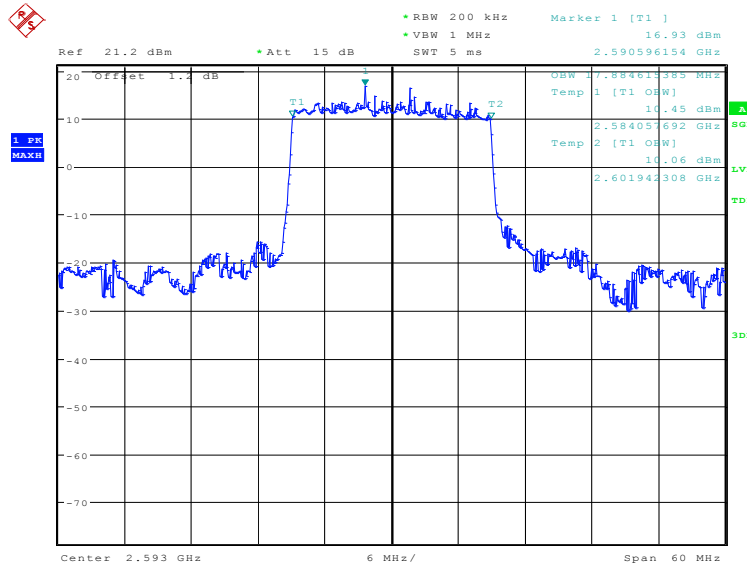

Date: 10.SEP.2019 20:05:53

LTE band 41, 20MHz Bandwidth,16QAM (99% BW)

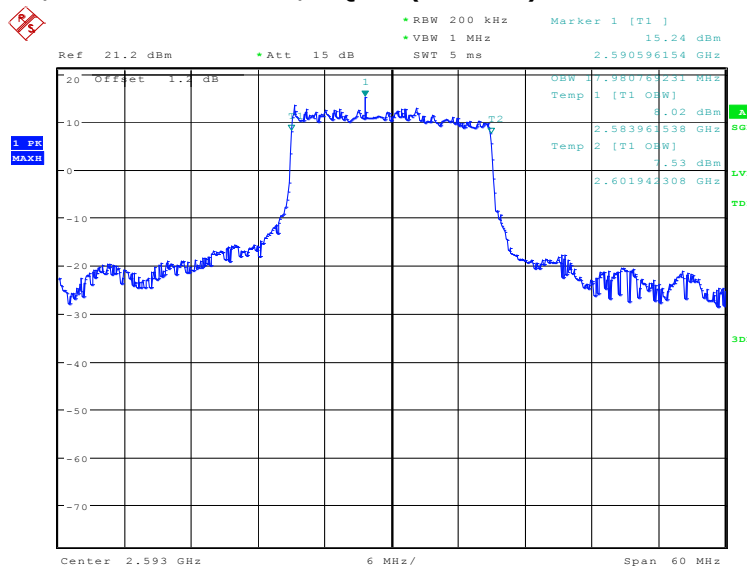


Date: 10.SEP.2019 20:07:18

LTE band 66, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1745.0	QPSK	16QAM
	1097.76	1097.76

LTE band 66, 1.4MHz Bandwidth, QPSK (99% BW)

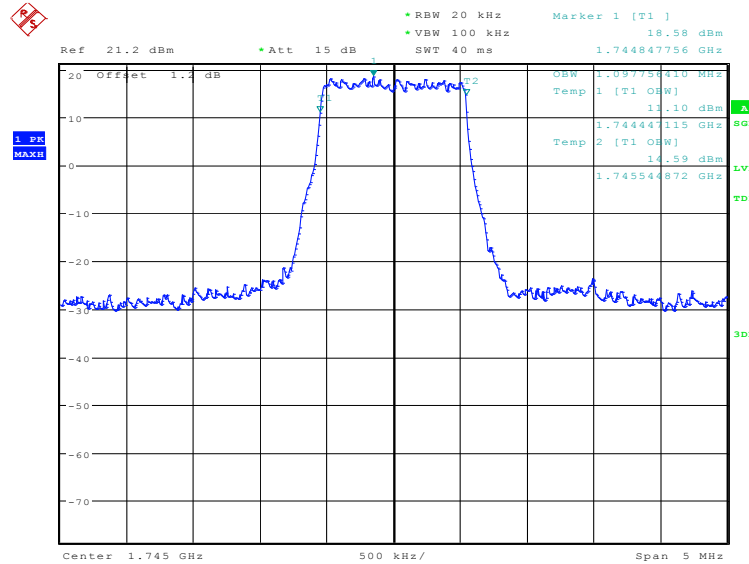

Date: 11.SEP.2019 16:51:05

LTE band 66, 1.4MHz Bandwidth, 16QAM (99% BW)

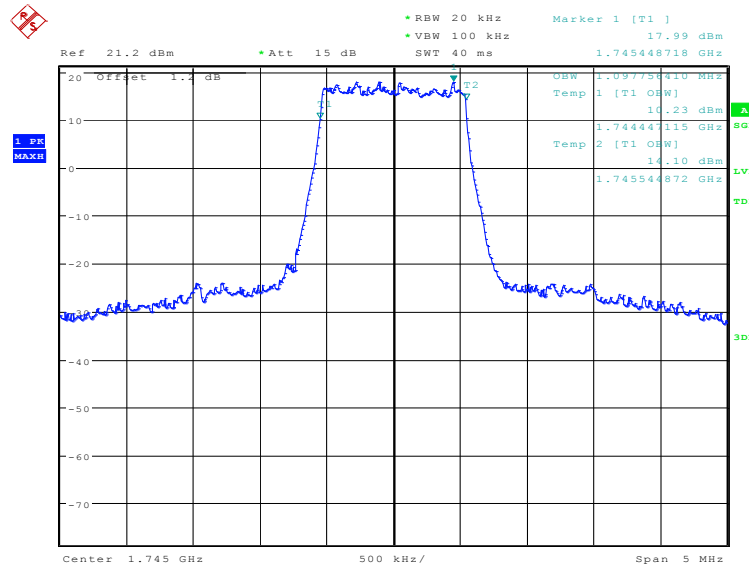


Date: 11.SEP.2019 16:52:29

LTE band 66, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1745.0	QPSK	16QAM
	2692.31	2692.31

LTE band 66, 3MHz Bandwidth, QPSK (99% BW)

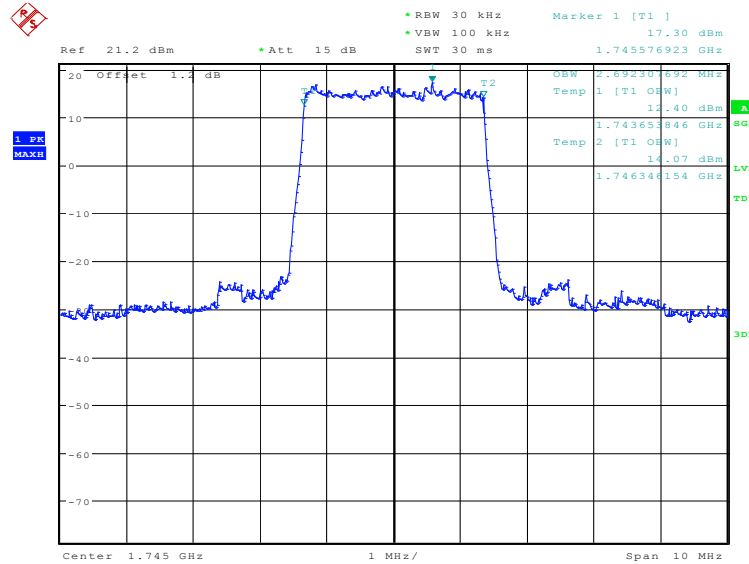

Date: 11.SEP.2019 16:53:54

LTE band 66, 3MHz Bandwidth, 16QAM (99% BW)

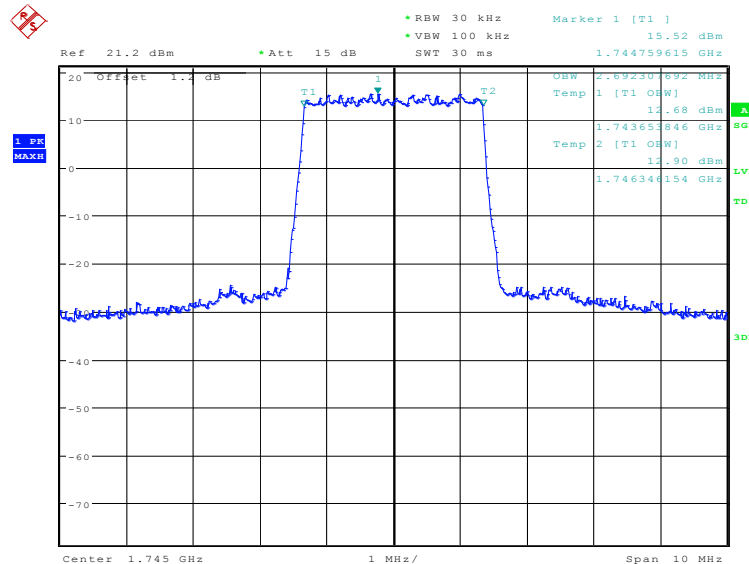

Date: 11.SEP.2019 16:55:17

Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1745.0	QPSK	16QAM
	4495.19	4495.19

* RBW 50 kHz
 * VBW 200 kHz
 SWT 10 ms

Ref 21.2 dBm
 * Att 15 dB
 Marker 1 [T1]
 19.21 dBm
 1.745817308 GHz

20 Offset 1.2 dB
 T1
 T2
 GBW 4.495192308 MHz
 Temp 1 [T1 Off]
 15.31 dBm
 1.742740385 GHz
 Temp 2 [T1 Off]
 14.07 dBm
 1.747235577 GHz

Center 1.745 GHz
 1.5 MHz/
 Span 15 MHz

• RBW 50 kHz
 • VBW 200 kHz
 • Att 15 dB
 • SWT 10 ms

Ref 21.2 dBm
 Marker 1 [T1]
 18.22 dBm
 1.747091346 GHz

20 Offset 1.1 dB
 T1
 T2
 1.747259615 GHz

10
 0
 -10
 -20
 -30
 -40
 -50
 -60
 -70

1.745 GHz
 1.5 MHz/
 Span 15 MHz


1.745193508 GHz
 Temp 1 [T1 OHW]
 15.92 dBm
 1.742764423 GHz
 Temp 2 [T1 OHW]
 15.89 dBm

Page 95 of 184

LTE band 66, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1745.0	QPSK	16QAM
	8942.31	8990.38

LTE band 66, 10MHz Bandwidth, QPSK (99% BW)

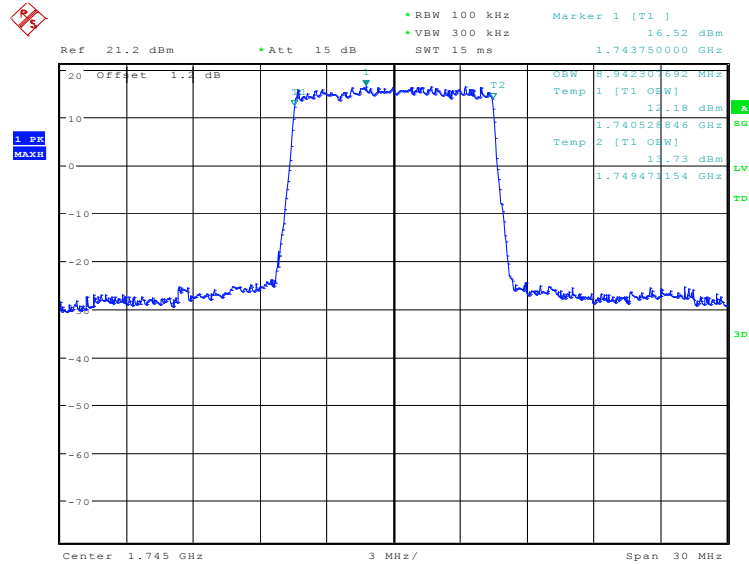

Date: 11.SEP.2019 16:59:32

LTE band 66, 10MHz Bandwidth, 16QAM (99% BW)

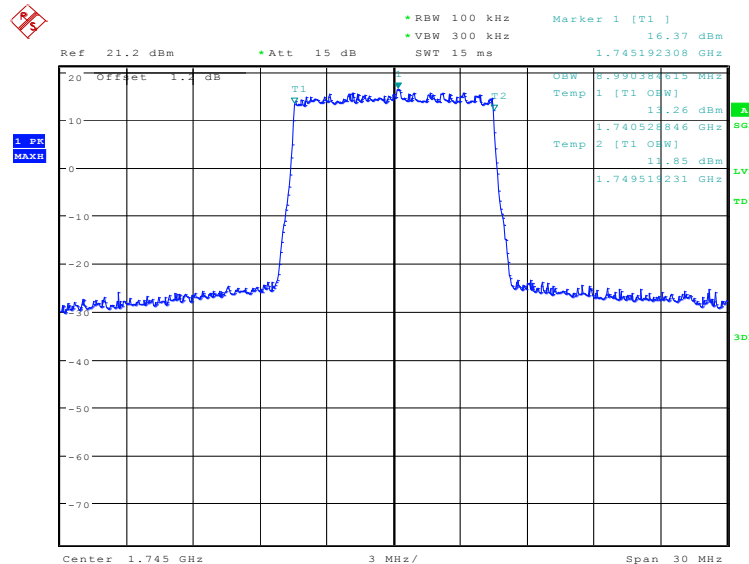


Date: 11.SEP.2019 17:00:55

LTE band 66, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1745.0	QPSK	16QAM
	13485.58	13485.58

LTE band 66, 15MHz Bandwidth, QPSK (99% BW)

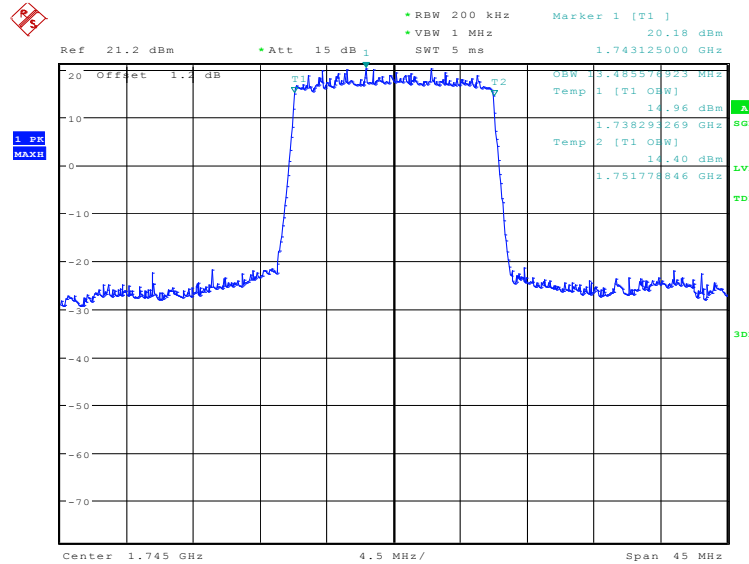

Date: 11.SEP.2019 17:02:20

LTE band 66, 15MHz Bandwidth, 16QAM (99% BW)

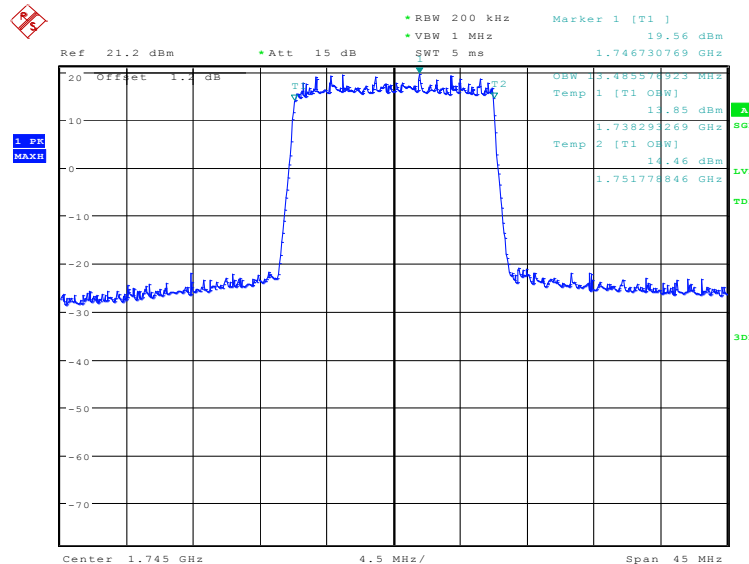


Date: 11.SEP.2019 17:03:44

LTE band 66, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1745.0	QPSK	16QAM
	17884.62	17884.62

LTE band 66, 20MHz Bandwidth, QPSK (99% BW)

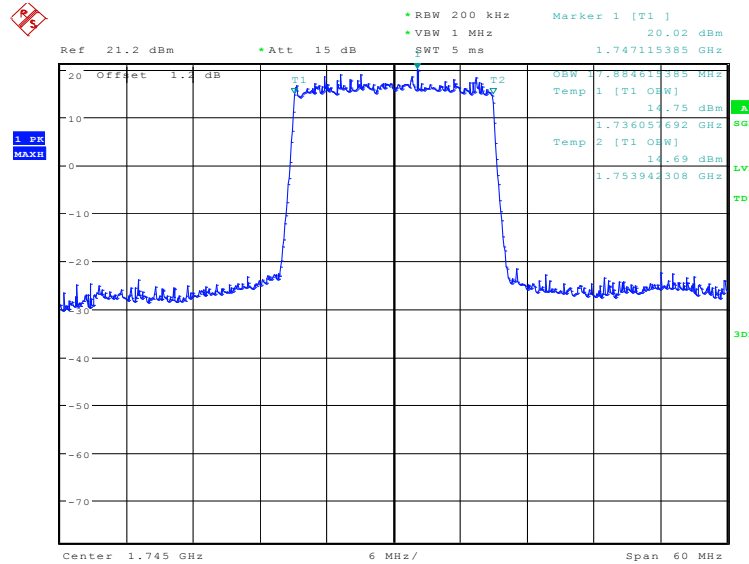

Date: 11.SEP.2019 17:05:09

LTE band 66, 20MHz Bandwidth, 16QAM (99% BW)

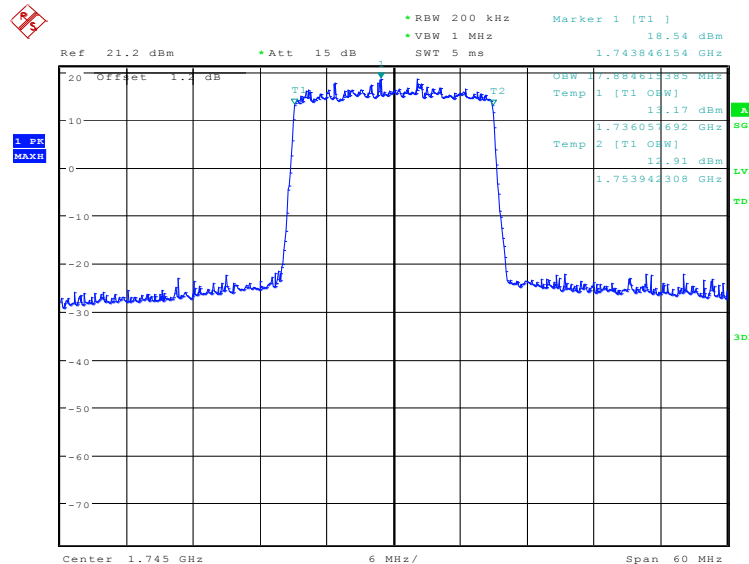


Date: 11.SEP.2019 17:06:33

LTE band 71, 5MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
680.5	QPSK	16QAM
	4495.19	4495.19

LTE band 71, 5MHz Bandwidth, QPSK (99% BW)

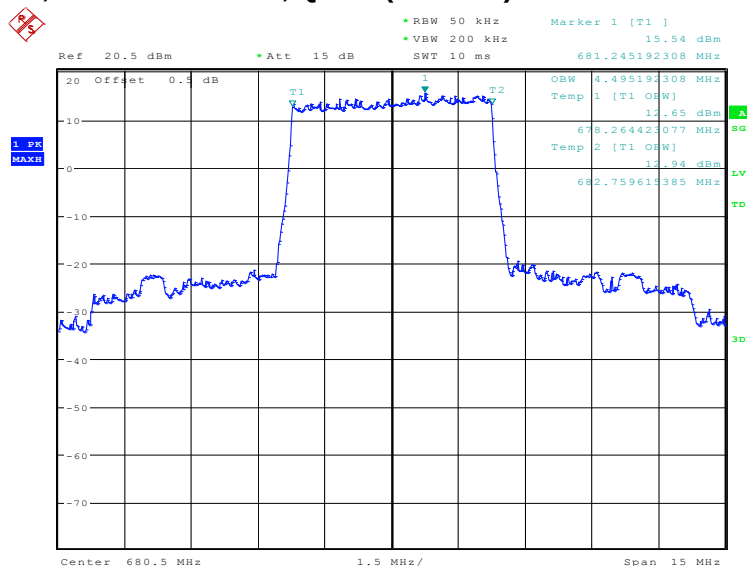

Date: 15.NOV.2019 13:24:28

LTE band 71, 5MHz Bandwidth, 16QAM (99% BW)

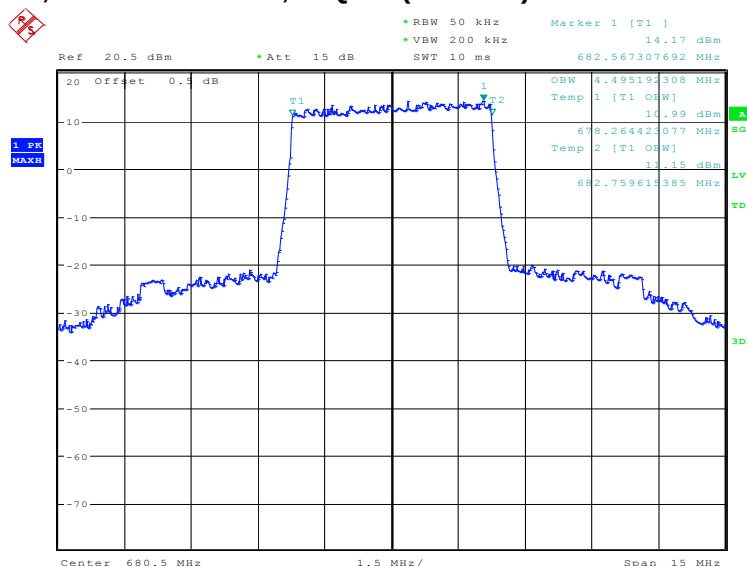


Date: 15.NOV.2019 13:25:52

LTE band 71, 10MHz (99%)


Frequency (MHz)	Occupied Bandwidth (99%) (kHz)	
680.5	QPSK	16QAM
	8990.38	8990.38

LTE band 71, 10MHz Bandwidth, QPSK (99% BW)

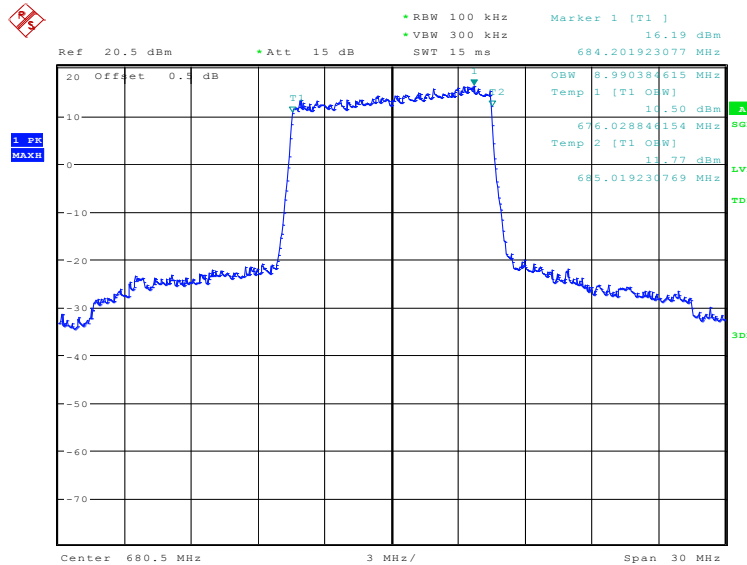

Date: 15.NOV.2019 13:27:18

LTE band 71, 10MHz Bandwidth, 16QAM (99% BW)

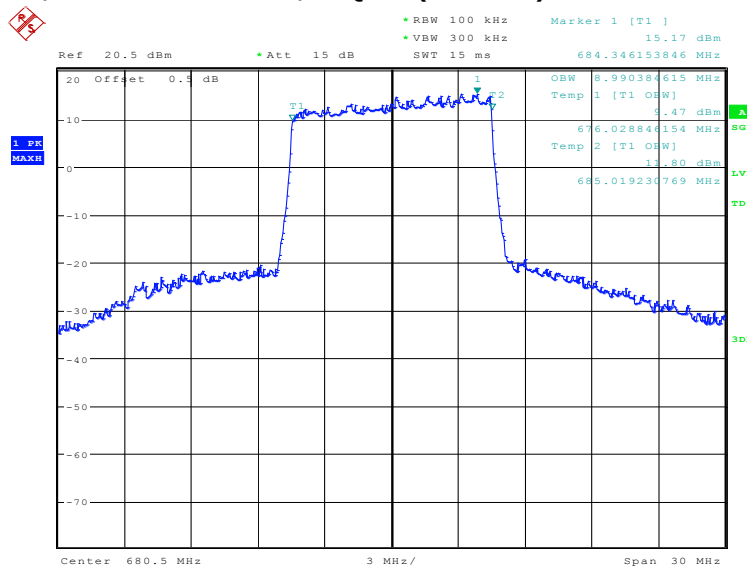

Date: 15.NOV.2019 13:28:42