



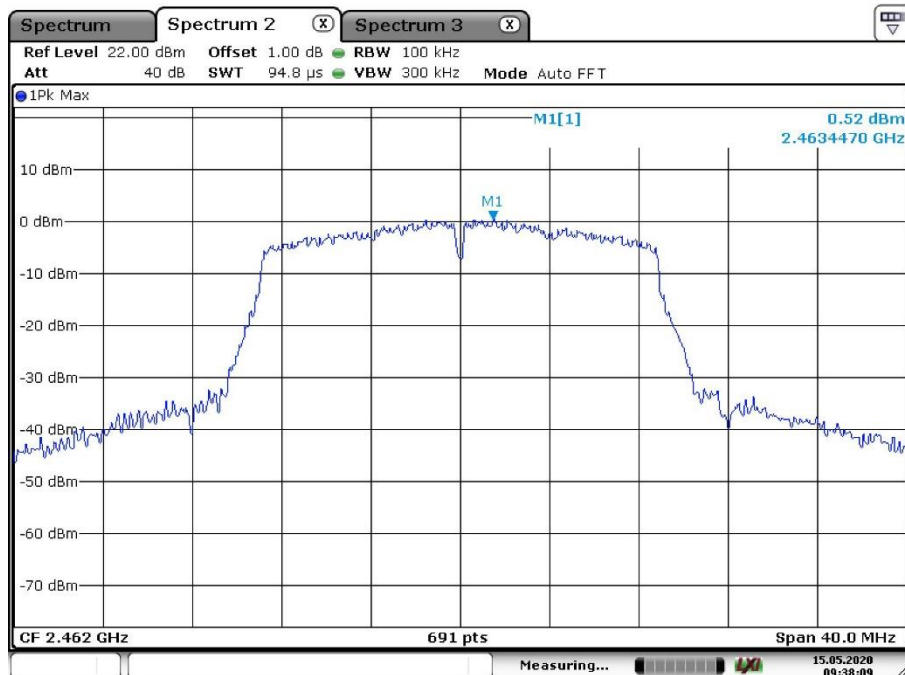


Date: 15.MAY.2020 09:38:10

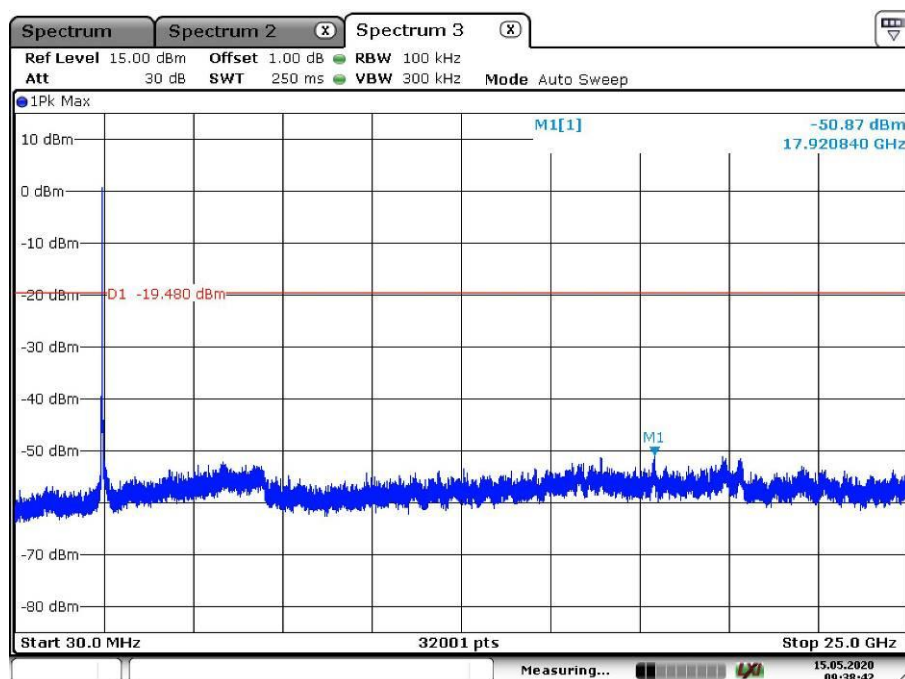


Date: 15.MAY.2020 09:38:43

Wi-Fi 802.11 b mode, Band Edge

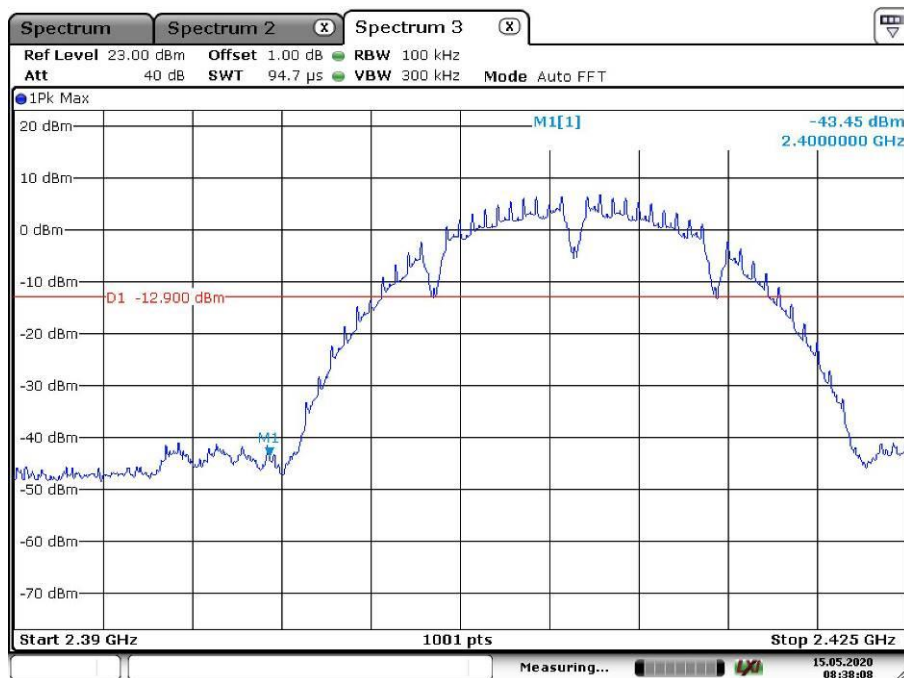


Date: 15.MAY.2020 08:38:08

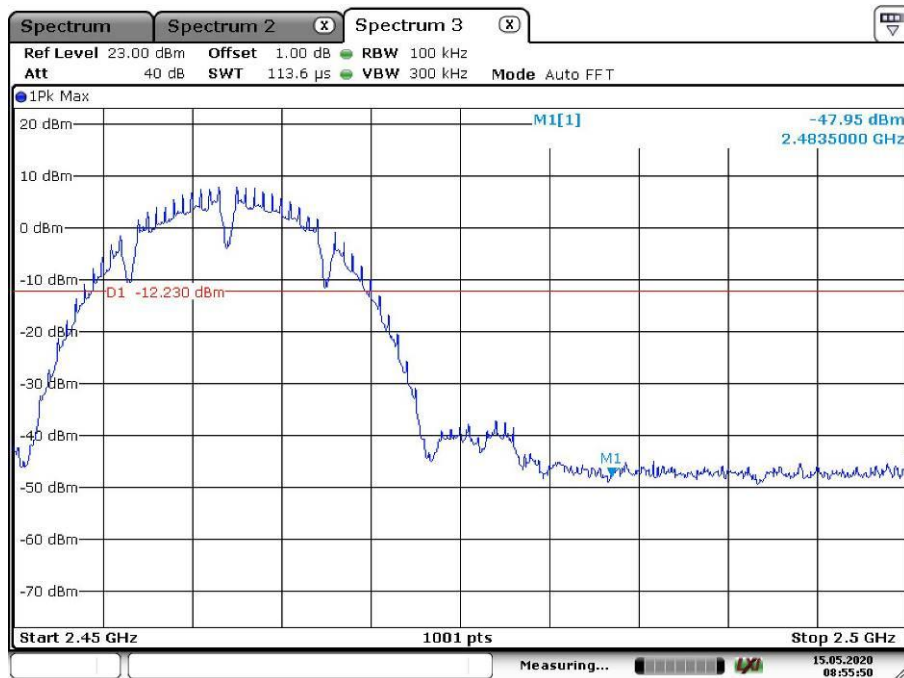


Date: 15.MAY.2020 08:55:51

Wi-Fi 802.11 g mode, Band Edge

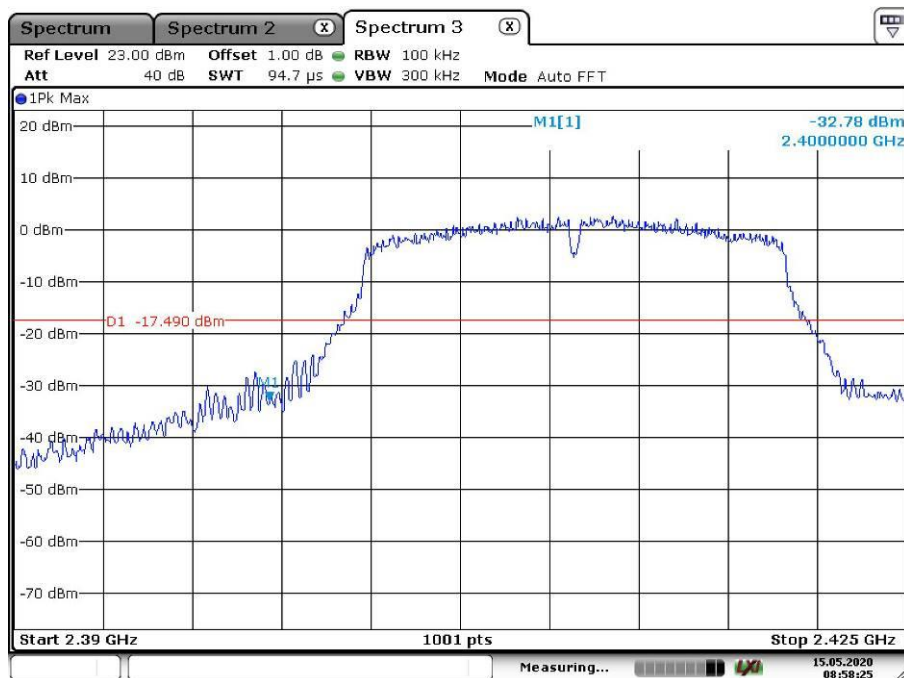


Date: 15.MAY.2020 08:58:25

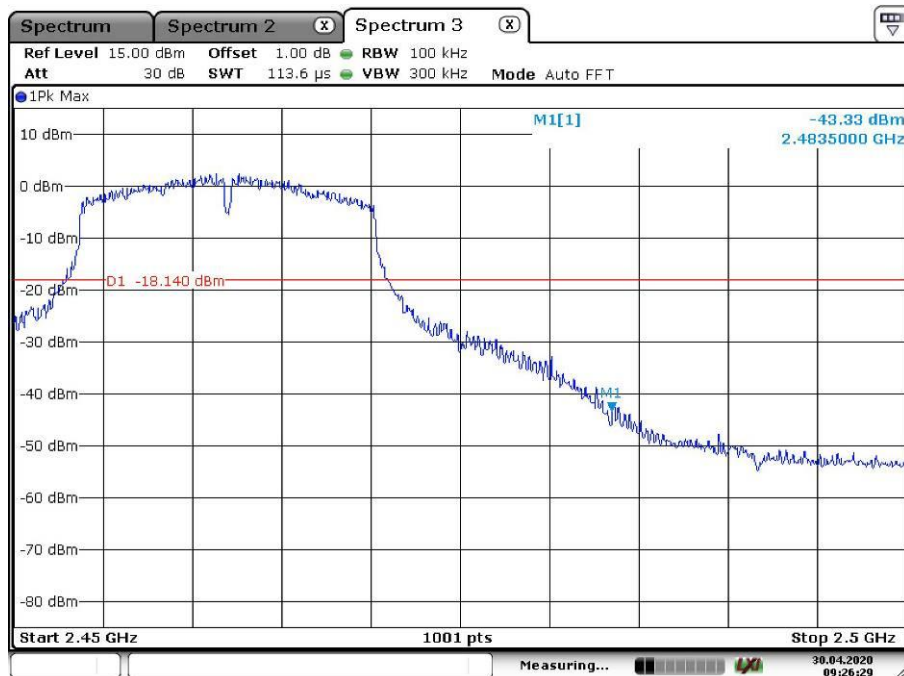


Date: 30.APR.2020 09:26:29

Wi-Fi 802.11 n(HT20) mode, Band Edge

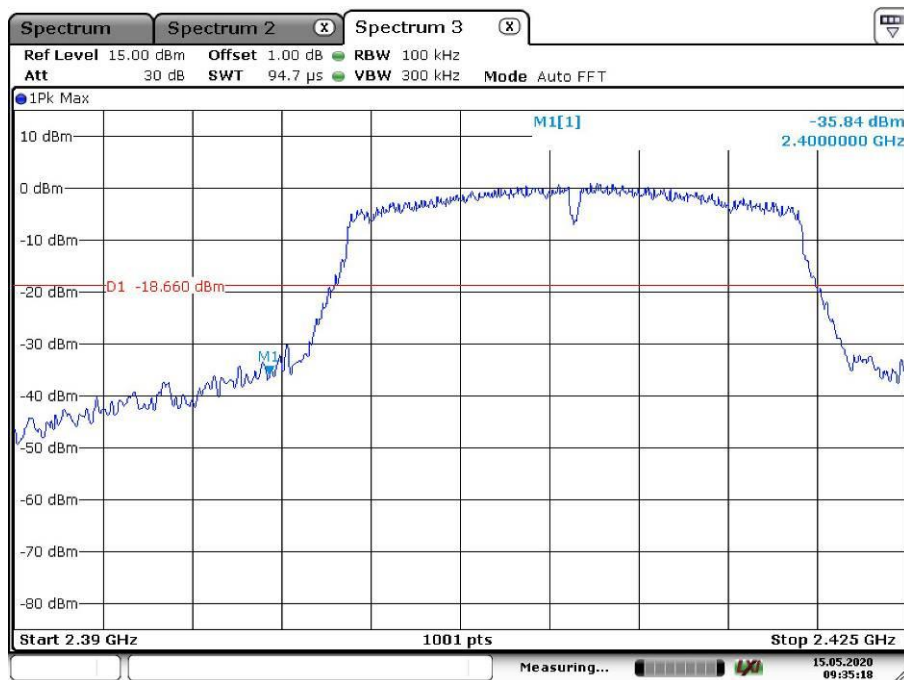

Date: 15.MAY.2020 09:35:18

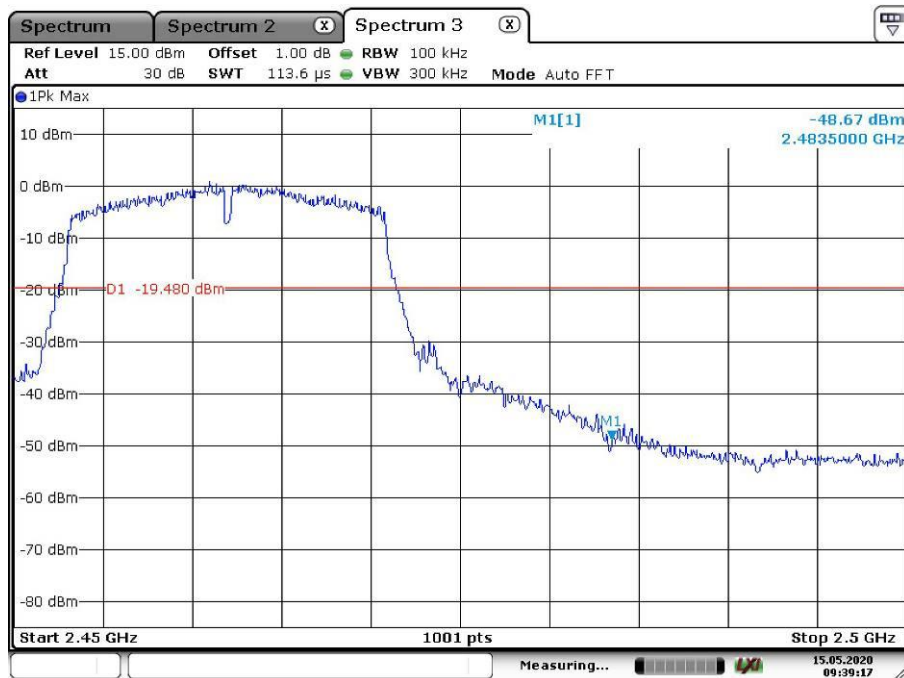

Date: 15.MAY.2020 09:39:17

Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

Appendix C.5: Test Results of Radiated Spurious Emissions 30MHz - 1GHz (Worst case)

Wi-Fi 802.11 b mode, 1 Mbps


EMI Auto Test(1)

1 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI2.4G_11b_CH1
TestVoltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

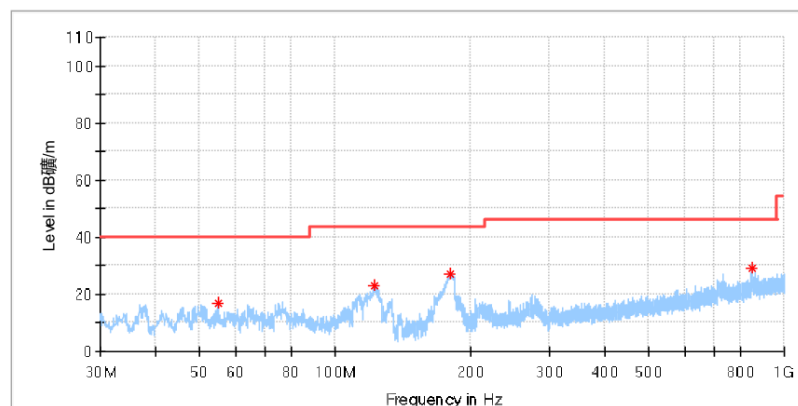

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.783500	16.70	---	40.00	23.30	100.0	H	13.0	-18.7
122.053000	22.98	---	43.50	20.52	100.0	H	66.0	-21.3
180.010500	27.01	---	43.50	16.49	100.0	H	208.0	-20.8
845.770000	29.19	---	46.00	16.81	100.0	H	1.0	-6.0


EMI Auto Test(1)

2 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI2.4G_11b_CH1
TestVoltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

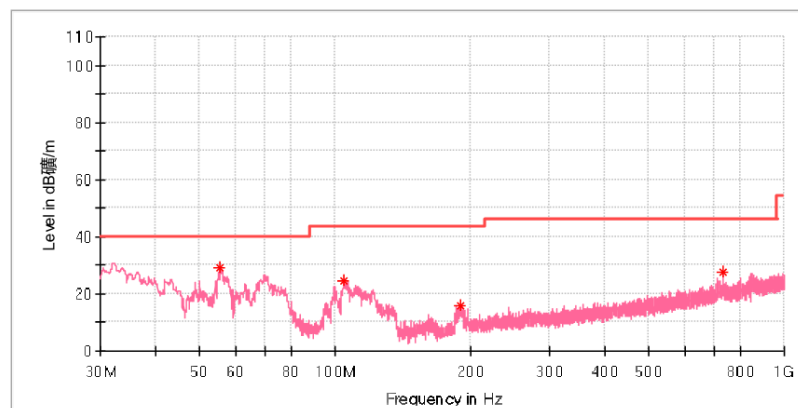

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
55.462500	29.35	---	40.00	10.65	100.0	V	194.0	-18.8
104.641500	24.31	---	43.50	19.19	100.0	V	340.0	-19.1
190.050000	15.99	---	43.50	27.51	100.0	V	0.0	-19.9
729.903500	27.55	---	46.00	18.45	100.0	V	261.0	-7.9

30/4/2020

3:10:36 PM

1GHz - 18GHz

Note: The highest waveform in the figure is Wi-Fi Fundamental.

Wi-Fi 802.11 b mode, 1 Mbps

H36GSA_G6A17R020125003K


EMI Auto Test(1)

1 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI 2.4GHz_11b_1CH
TestVoltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

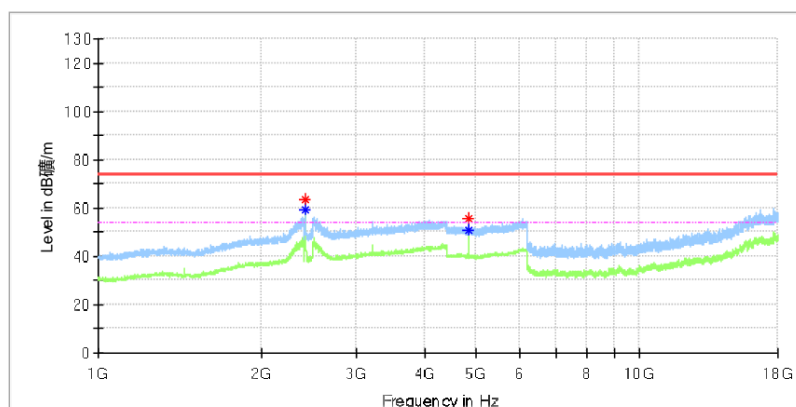

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2410.500000	63.42	---	74.00	10.58	100.0	H	54.0	8.0
2410.500000	---	59.34	54.00	-5.34	100.0	H	54.0	8.0
4823.500000	55.34	---	74.00	18.66	100.0	H	120.0	13.5
4824.000000	---	51.07	54.00	2.93	100.0	H	129.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


EMI Auto Test(1)

2 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4GHz_11b_1CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

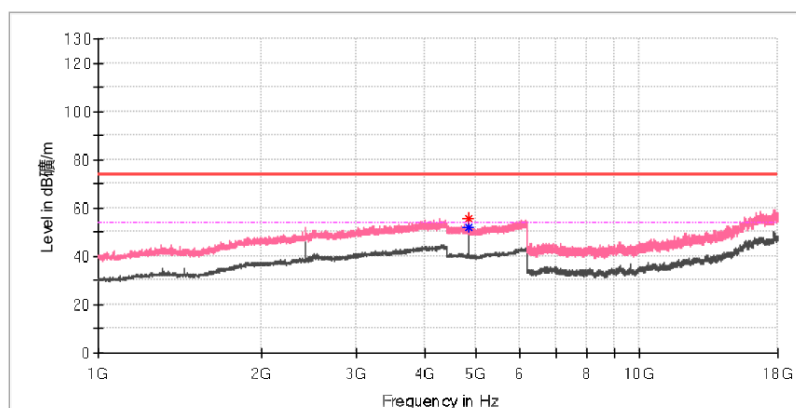

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4823.500000	55.72	---	74.00	18.28	100.0	V	196.0	13.5
4824.000000	---	51.71	54.00	2.29	100.0	V	188.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

3:36:23 PM


EMI Auto Test(1)

3 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11b_6CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

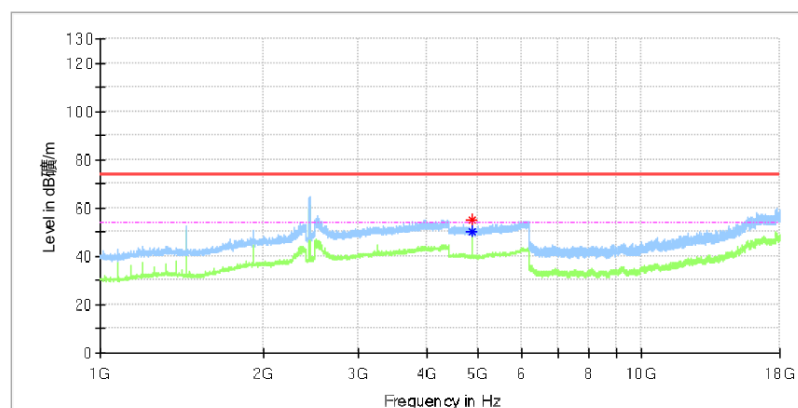

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	54.72	---	74.00	19.28	100.0	H	124.0	13.4
4874.000000	---	50.10	54.00	3.90	100.0	H	124.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

3:36:23 PM


EMI Auto Test(1)

4 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11b_6CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

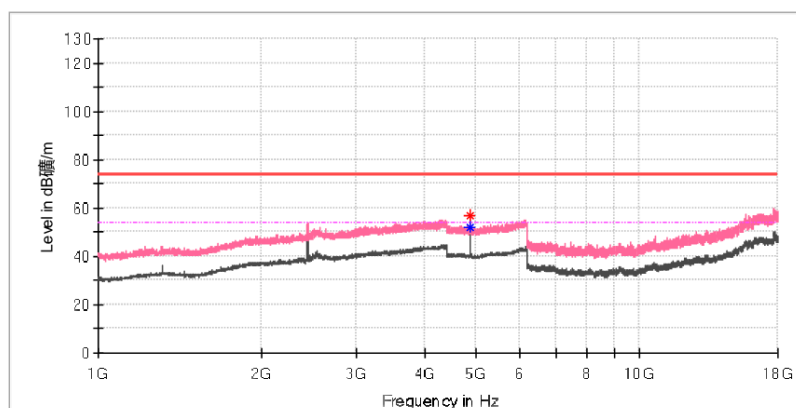

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	56.81	---	74.00	17.19	100.0	V	200.0	13.4
4874.000000	---	51.80	54.00	2.20	100.0	V	200.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

3:36:23 PM


EMI Auto Test(1)

5 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11b_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

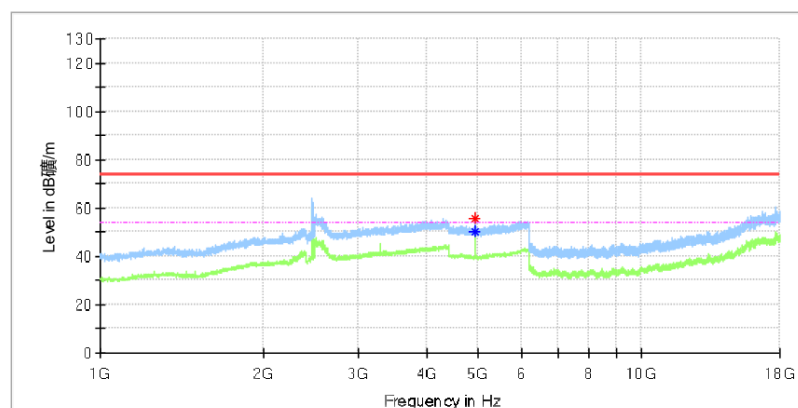

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	55.92	---	74.00	18.08	100.0	H	120.0	13.3
4924.000000	---	50.20	54.00	3.80	100.0	H	120.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

3:36:23 PM


EMI Auto Test(1)

6 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11b_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

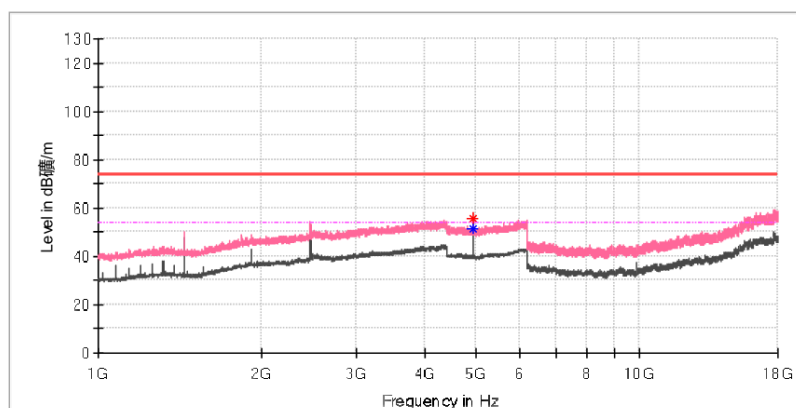

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4923.500000	55.81	---	74.00	18.19	100.0	V	195.0	13.3
4924.000000	---	51.40	54.00	2.60	100.0	V	204.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

3:36:23 PM

H36GSB_G6A17V0201170028


EMI Auto Test(1)

1 / 2

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17V0201170028
Test Mode:	TX_WIFI2.4G_11b_CH6
Test Voltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

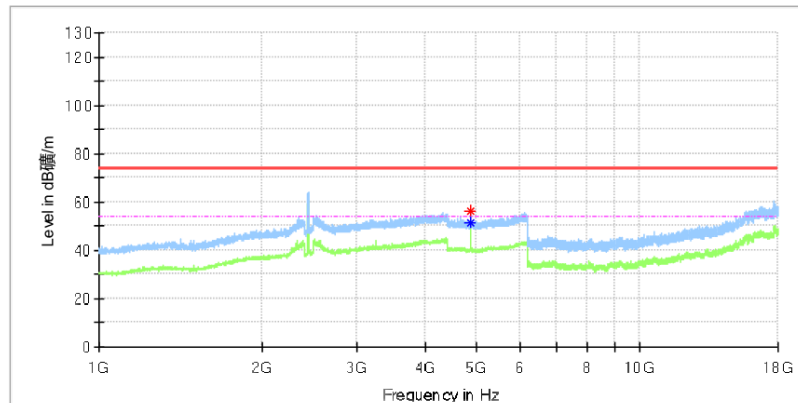

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	56.53	---	74.00	17.47	100.0	H	99.0	13.4
4874.000000	---	51.34	54.00	2.66	100.0	H	99.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


EMI Auto Test(1)

2 / 2

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17V0201170028
Test Mode:	TX_WIFI2.4G_11b_CH6
Test Voltage:	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

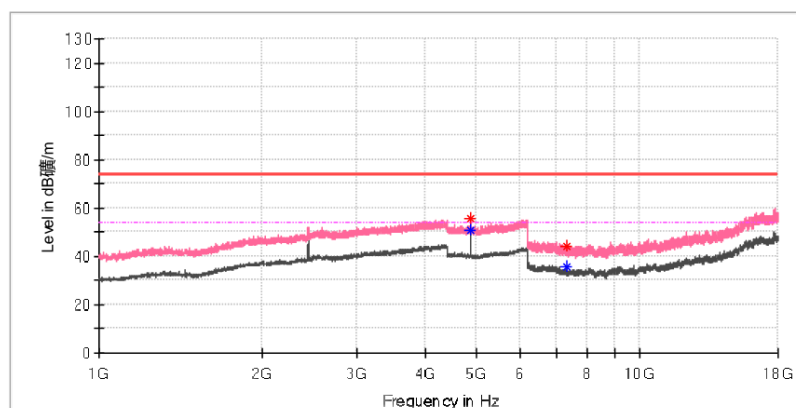

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	55.63	---	74.00	18.37	100.0	V	207.0	13.4
4874.000000	---	50.84	54.00	3.16	100.0	V	207.0	13.4
7311.658333	---	35.61	54.00	18.39	100.0	V	282.0	8.2
7312.641667	44.32	---	74.00	29.68	100.0	V	1.0	8.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/4/2020

8:07:09 PM

H36GSC_G6A17W0201170002


EMI Auto Test(1)

1 / 2

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17W0201170002
Test Mode:	TX_WIFI2.4G_11b_CH6
Test Voltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

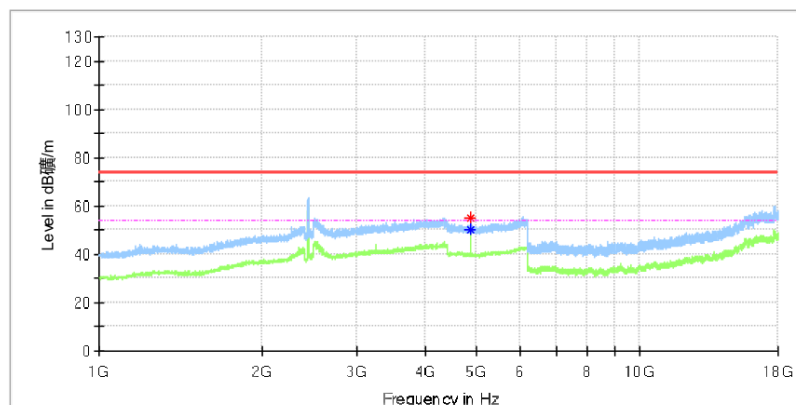

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4873.500000	---	50.11	54.00	3.89	100.0	H	76.0	13.4
4874.000000	55.27	---	74.00	18.73	100.0	H	76.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


EMI Auto Test(1)

2 / 2

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17W0201170002
TestMode:	TX_WIFI2.4G_11b_CH6
TestVoltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

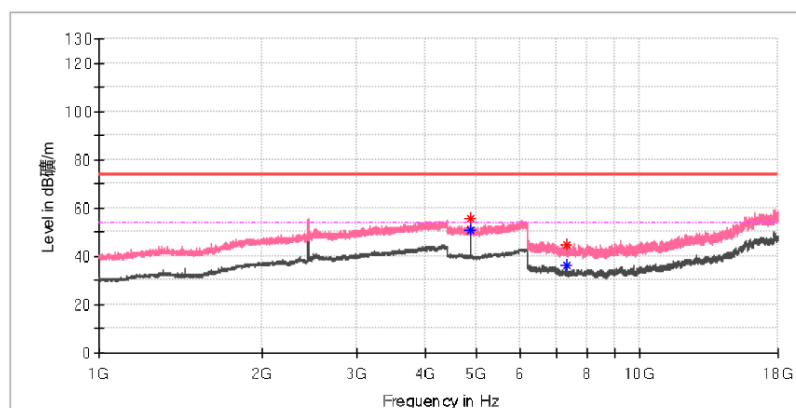

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	55.34	---	74.00	18.66	100.0	V	179.0	13.4
4874.000000	---	50.67	54.00	3.33	100.0	V	179.0	13.4
7309.200000	44.44	---	74.00	29.56	100.0	V	229.0	8.2
7311.658333	---	36.02	54.00	17.98	100.0	V	229.0	8.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/4/2020

6:12:51 PM

Wi-Fi 802.11 g mode, 6 Mbps
H36GSA_G6A17R020125003K


EMI Auto Test(1)

1 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_1CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

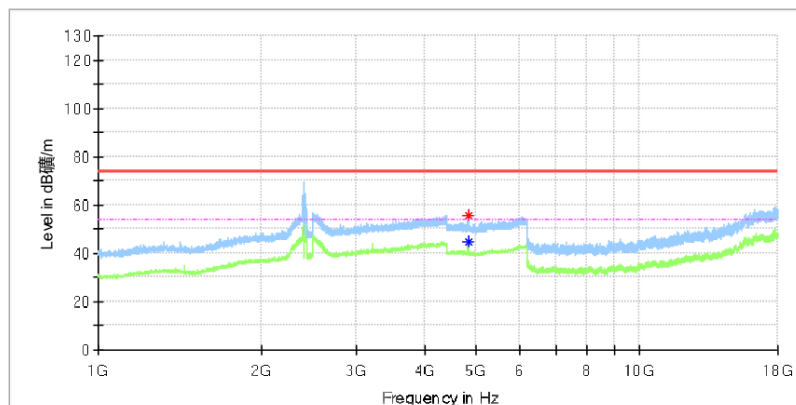

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4820.000000	---	44.46	54.00	9.54	100.0	H	126.0	13.5
4821.000000	55.49	---	74.00	18.51	100.0	H	126.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


EMI Auto Test(1)

2 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_1CH
Test Voltage:	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

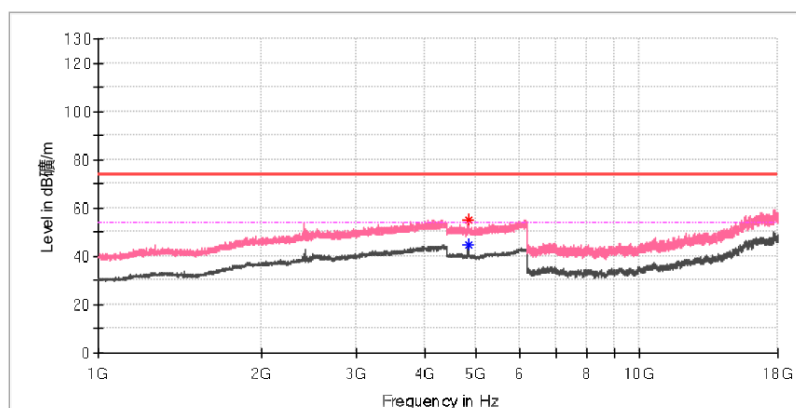

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4818.000000	---	44.49	54.00	9.51	100.0	V	171.0	13.5
4822.000000	55.14	---	74.00	18.86	100.0	V	171.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

8:18:57 PM


EMI Auto Test(1)

3 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_6CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

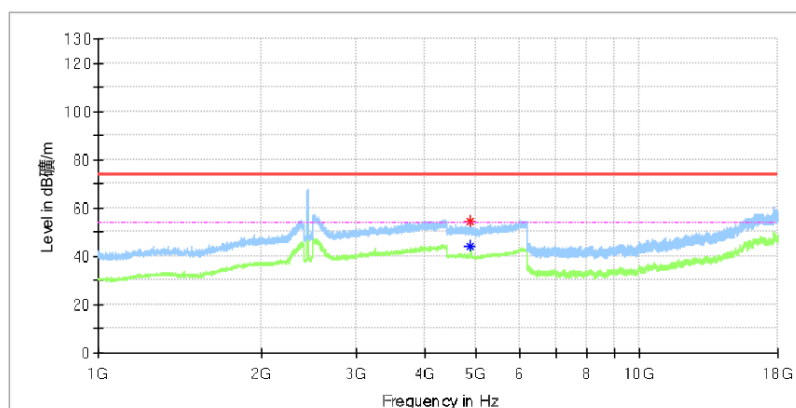

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4873.000000	---	43.93	54.00	10.07	100.0	H	113.0	13.4
4875.500000	54.23	---	74.00	19.77	100.0	H	140.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

8:18:57 PM


EMI Auto Test(1)

4 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_6CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

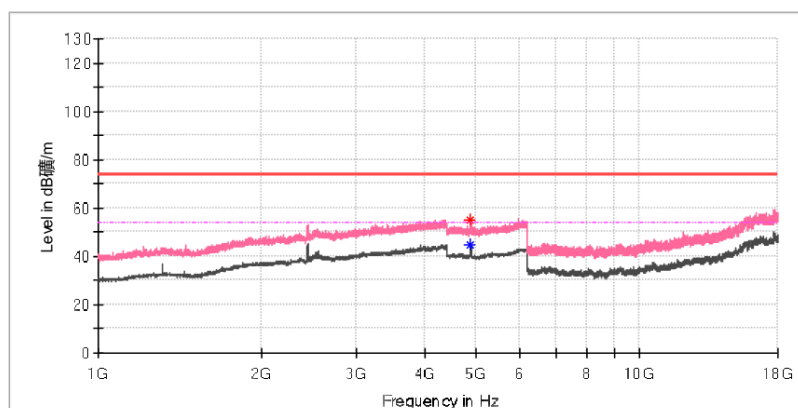

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4872.000000	55.25	---	74.00	18.75	100.0	V	170.0	13.4
4873.500000	---	44.91	54.00	9.09	100.0	V	204.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

8:18:57 PM


EMI Auto Test(1)

5 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

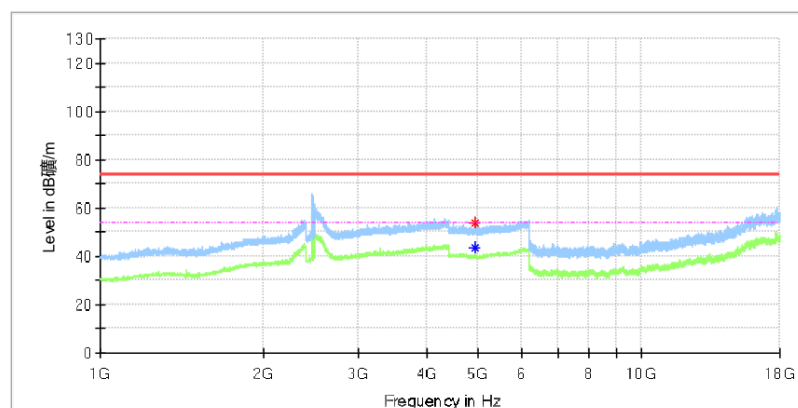

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4923.500000	53.99	---	74.00	20.01	100.0	H	120.0	13.3
4925.500000	---	43.39	54.00	10.61	100.0	H	120.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

8:18:57 PM


EMI Auto Test(1)

6 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

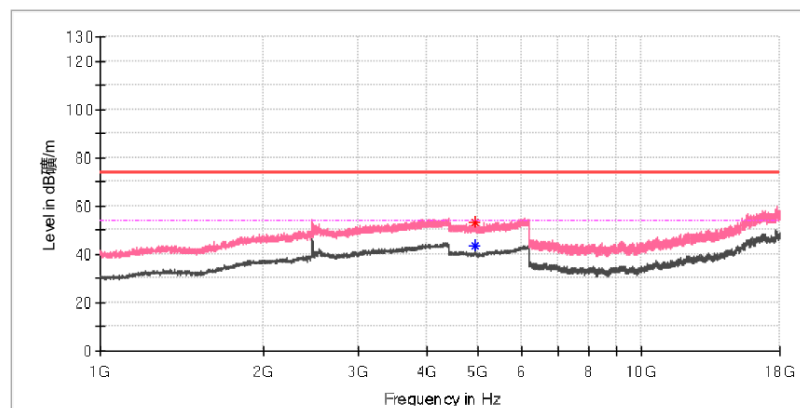

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4922.500000	---	43.75	54.00	10.25	100.0	V	207.0	13.3
4927.000000	53.35	---	74.00	20.65	100.0	V	207.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

8:18:57 PM

Wi-Fi 802.11 n(HT20) mode, MCS0
H36GSA_G6A17R020125003K


EMI Auto Test(1)

1 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11n_20M_1CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

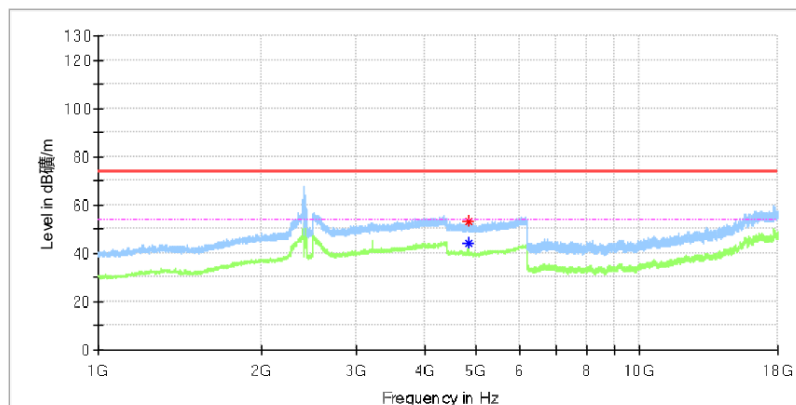

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4823.500000	53.25	---	74.00	20.75	100.0	H	139.0	13.5
4823.500000	---	44.14	54.00	9.86	100.0	H	139.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


EMI Auto Test(1)

2 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11n_20M_1CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

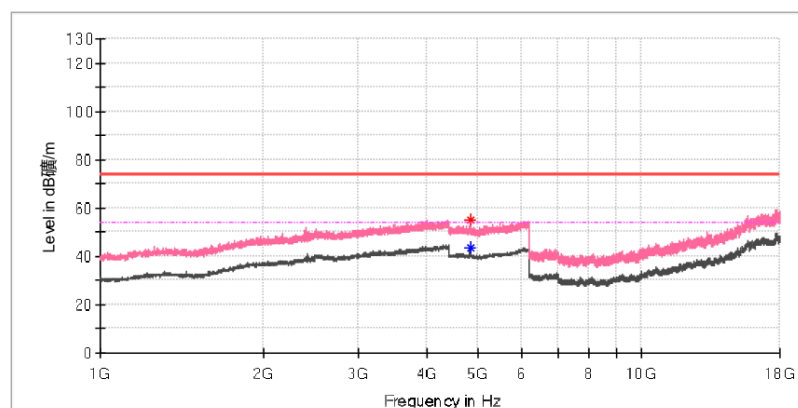

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4822.500000	---	43.43	54.00	10.57	100.0	V	190.0	13.5
4825.000000	54.82	---	74.00	19.18	100.0	V	199.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

27/4/2020

1:44:12 PM


EMI Auto Test(1)

3 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11n_20M_6CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

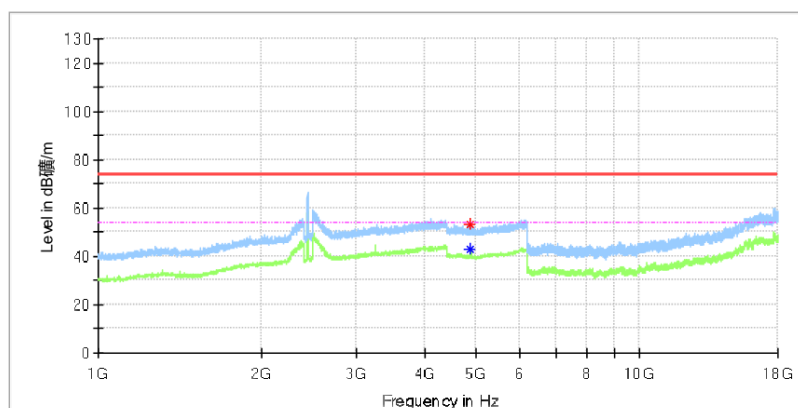

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4875.000000	53.46	---	74.00	20.54	100.0	H	112.0	13.4
4875.500000	---	43.19	54.00	10.81	100.0	H	112.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

27/4/2020

1:44:12 PM


EMI Auto Test(1)

4 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11n_20M_6CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

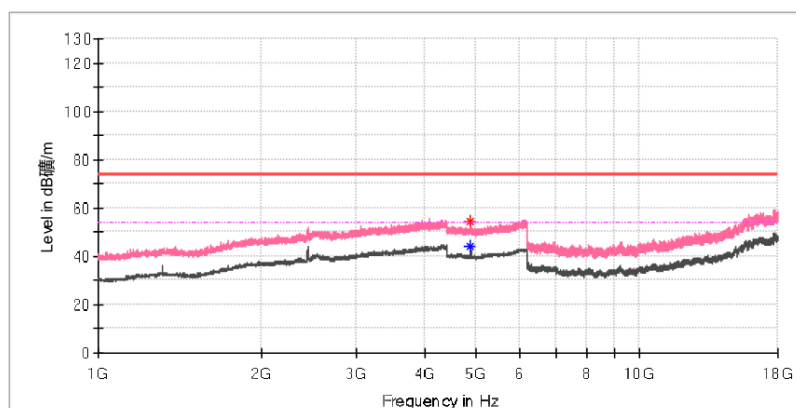

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4874.000000	---	43.93	54.00	10.07	100.0	V	192.0	13.4
4875.000000	54.45	---	74.00	19.55	100.0	V	201.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

27/4/2020

1:44:12 PM


EMI Auto Test(1)

5 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11n_20M_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

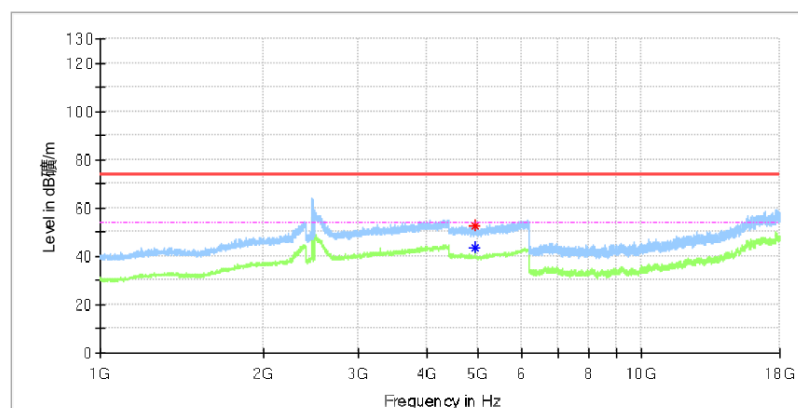

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4923.500000	---	43.39	54.00	10.61	100.0	H	126.0	13.3
4925.500000	52.85	---	74.00	21.15	100.0	H	126.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

27/4/2020

1:44:12 PM


EMI Auto Test(1)

6 / 10

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11n_20M_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

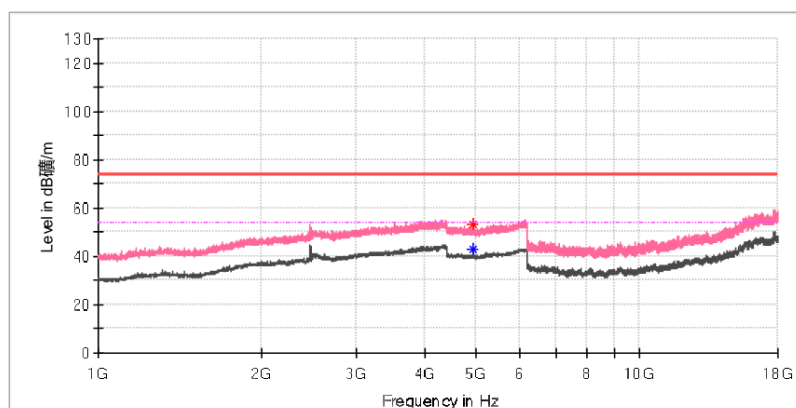

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	53.31	---	74.00	20.69	100.0	V	171.0	13.3
4925.000000	---	42.76	54.00	11.24	100.0	V	171.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

27/4/2020

1:44:12 PM

Appendix C.6: Test Results of Radiated Emissions in Restricted Bands

Wi-Fi 802.11 b mode, 1 Mbps

H36GSA _ G6A17R020125003K


EMI Auto Test(1)

1 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI2.4G_11b_CH1
TestVoltage::	DC 5V from adaptor
Remark:	Temp 23 Humi:45%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

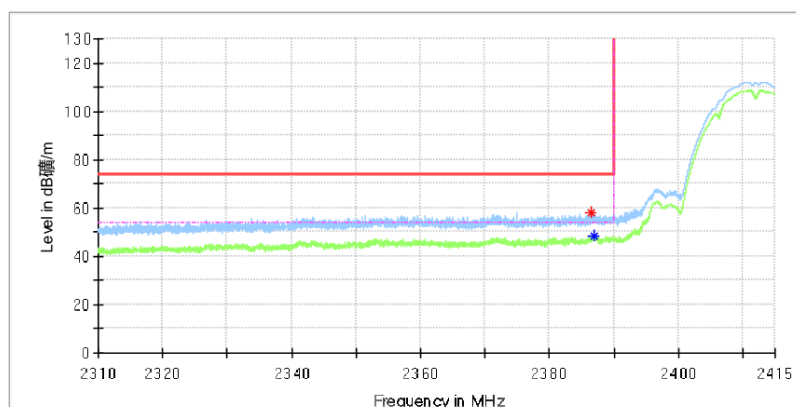

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.588235	57.82	—	74.00	16.18	100.0	H	62.0	7.0
2386.835294	—	48.52	54.00	5.48	100.0	H	62.0	7.0

15/5/2020

4:28:28 PM


EMI Auto Test(1)

2 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI2.4G_11b_CH1
Test Voltage:	DC 5V from adaptor
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

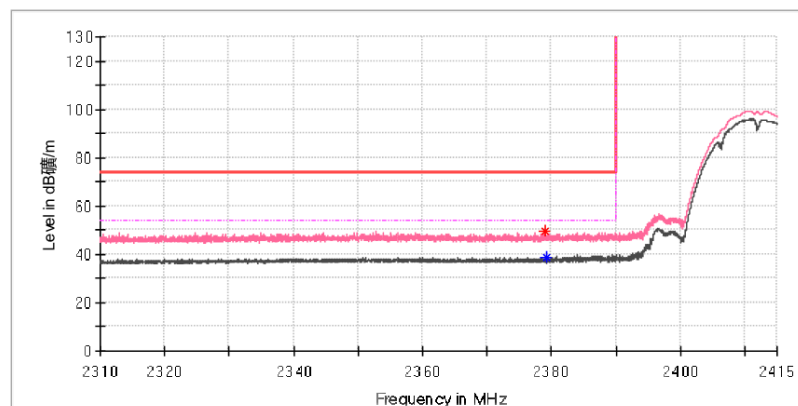

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2378.913971	49.57	---	74.00	24.43	100.0	V	127.0	7.0
2379.191912	---	38.85	54.00	15.15	100.0	V	127.0	7.0

15/5/2020

4:28:28 PM


EMI Auto Test(1)

3 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11b_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

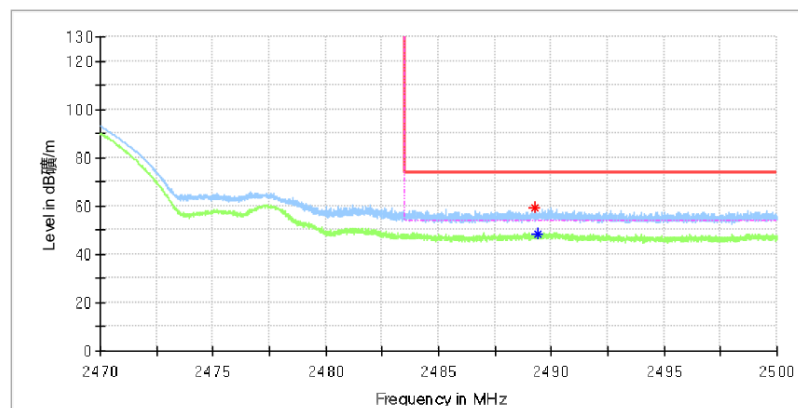

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2489.257353	59.32	---	74.00	14.68	100.0	H	55.0	7.4
2489.376471	---	48.56	54.00	5.44	100.0	H	66.0	7.4

15/5/2020

4:28:28 PM


EMI Auto Test(1)

4 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11b_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

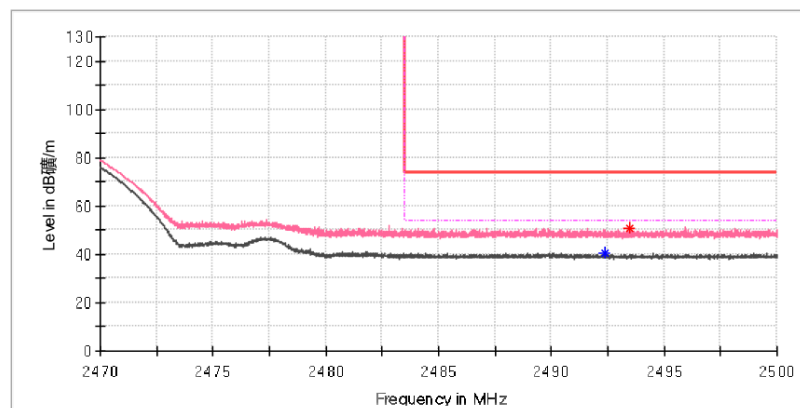

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2492.367647	---	40.76	54.00	13.24	100.0	V	27.0	7.4
2493.448529	50.94	---	74.00	23.06	100.0	V	220.0	7.4

15/5/2020

4:28:28 PM

Wi-Fi 802.11 g mode, 6 Mbps
H36GSA_G6A17R020125003K


EMI Auto Test(1)

1 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_1CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

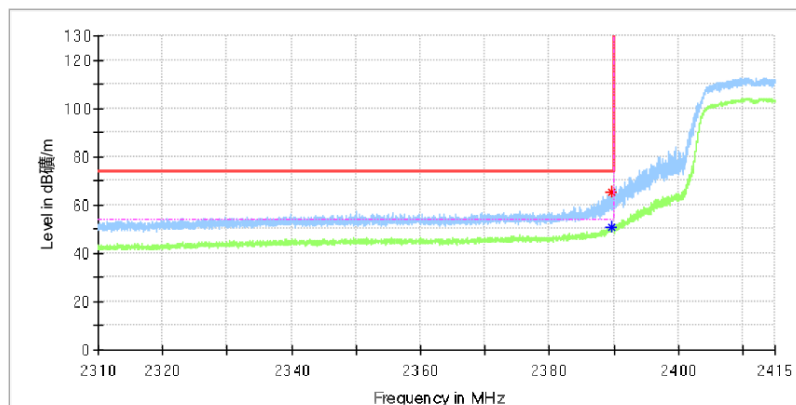

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.645588	65.48	---	74.00	8.52	100.0	H	67.0	7.0
2389.707353	---	51.05	54.00	2.95	100.0	H	56.0	7.0


EMI Auto Test(1)

2 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_1CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

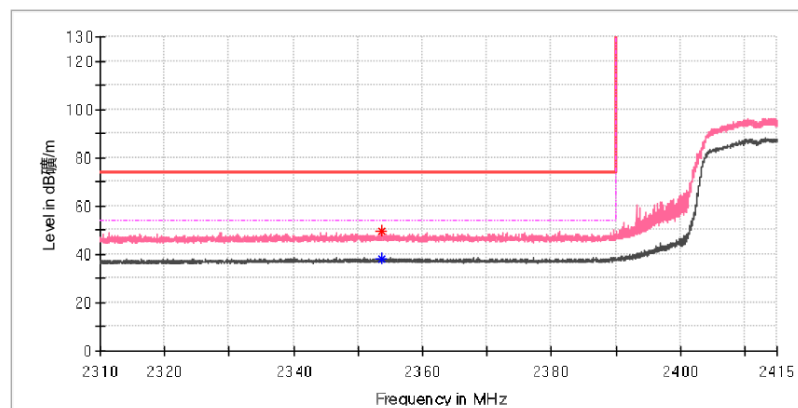

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2353.698530	49.72	---	74.00	24.28	100.0	V	227.0	6.9
2353.775735	---	38.16	54.00	15.84	100.0	V	0.0	6.9

27/4/2020

6:50:50 PM


EMI Auto Test(1)

3 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11g_11CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

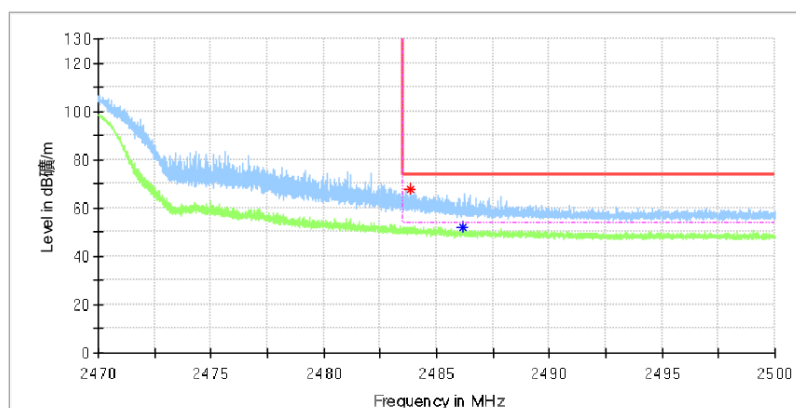

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.817647	67.82	---	74.00	6.18	100.0	H	65.0	7.4
2486.186765	---	51.98	54.00	2.02	100.0	H	65.0	7.4

27/4/2020

6:50:50 PM


EMI Auto Test(1)

4 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI 2.4G_11g_11CH
TestVoltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

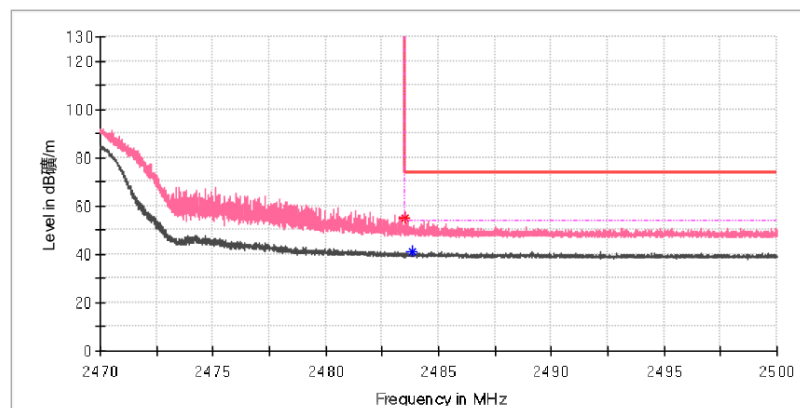

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.513235	55.30	---	74.00	18.70	100.0	V	141.0	7.4
2483.861765	---	40.82	54.00	13.18	100.0	V	355.0	7.4

27/4/2020

6:50:50 PM

Wi-Fi 802.11 n(HT20) mode, MCS0
H36GSA_G6A17R020125003K


EMI Auto Test(1)

1 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
Test Mode:	TX_WIFI 2.4G_11n_20M_1CH
Test Voltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

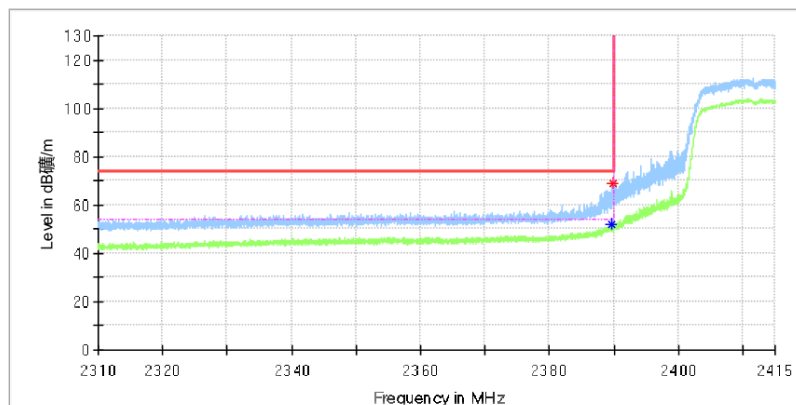

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.599265	---	51.85	54.00	2.15	100.0	H	69.0	7.0
2389.892647	68.73	---	74.00	5.27	100.0	H	58.0	7.0


EMI Auto Test(1)

2 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI 2.4G_11n_20M_1CH
TestVoltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

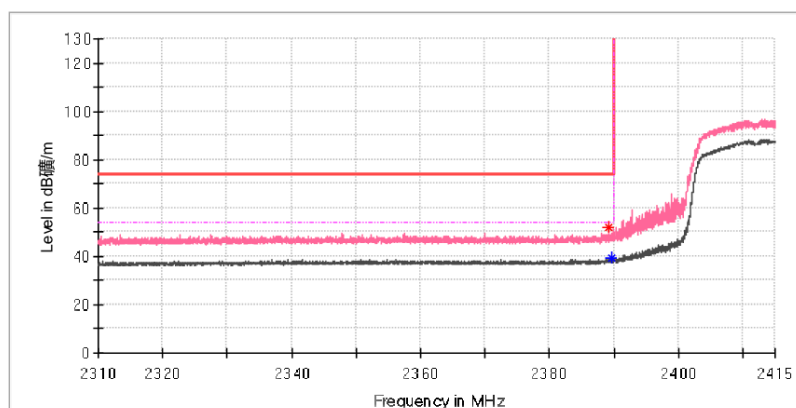

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.290441	51.87	---	74.00	22.13	100.0	V	250.0	7.0
2389.753677	---	39.05	54.00	14.95	100.0	V	145.0	7.0

28/4/2020

10:12:31 AM


EMI Auto Test(1)

3 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI 2.4G_11n_20M_11CH
TestVoltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

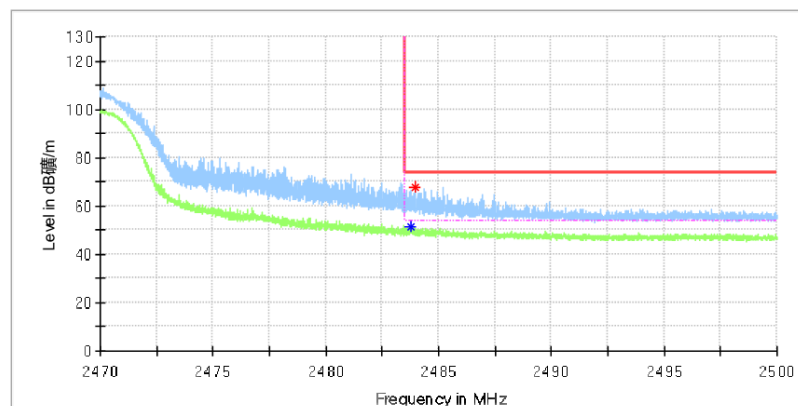

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.791177	---	51.44	54.00	2.56	100.0	H	72.0	7.4
2483.958824	67.86	---	74.00	6.14	100.0	H	72.0	7.4

28/4/2020

10:12:31 AM


EMI Auto Test(1)

4 / 8

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17R020125003K
TestMode:	TX_WIFI 2.4G_11n_20M_11CH
TestVoltage::	DC 5V from adaptor
Remark:	Temp 24 Humi:45%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

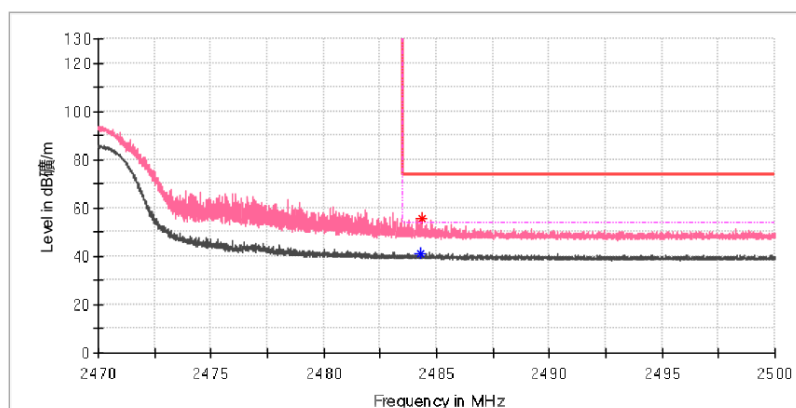

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.316177	---	41.13	54.00	12.87	100.0	V	140.0	7.4
2484.342647	55.74	---	74.00	18.26	100.0	V	35.0	7.4

28/4/2020

10:12:31 AM

H36GSB_G6A17V0201170028


EMI Auto Test(1)

1 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17V0201170028
Test Mode:	TX_WIFI2.4G_11n_CH1
Test Voltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

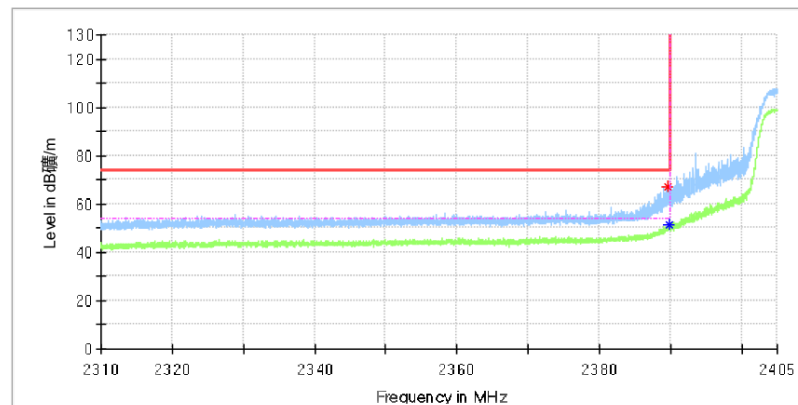

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.702206	67.10	---	74.00	6.90	100.0	H	41.0	7.0
2389.855882	---	51.44	54.00	2.56	100.0	H	72.0	7.0

29/4/2020

8:28:30 PM


EMI Auto Test(1)

2 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17V0201170028
TestMode:	TX_WIFI2.4G_11n_CH1
TestVoltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

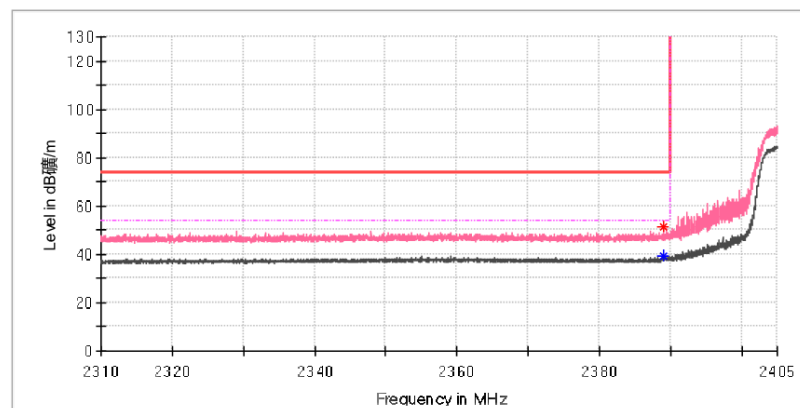

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.031618	---	39.21	54.00	14.79	100.0	V	82.0	7.0
2389.031618	51.15	---	74.00	22.85	100.0	V	82.0	7.0

29/4/2020

8:28:30 PM


EMI Auto Test(1)

3 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17V0201170028
TestMode:	TX_WIFI2.4G_11n_CH11
Test Voltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

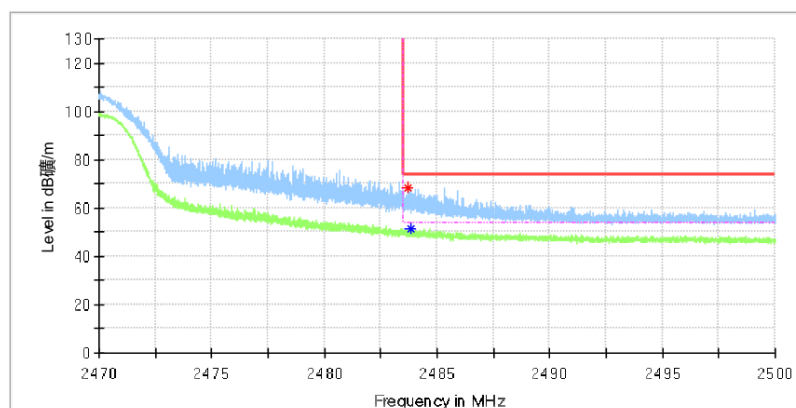

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.720588	68.47	---	74.00	5.53	100.0	H	87.0	7.4
2483.844118	---	51.34	54.00	2.66	100.0	H	71.0	7.4

29/4/2020

8:28:30 PM


EMI Auto Test(1)

4 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17V0201170028
TestMode:	TX_WIFI2.4G_11n_CH11
TestVoltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

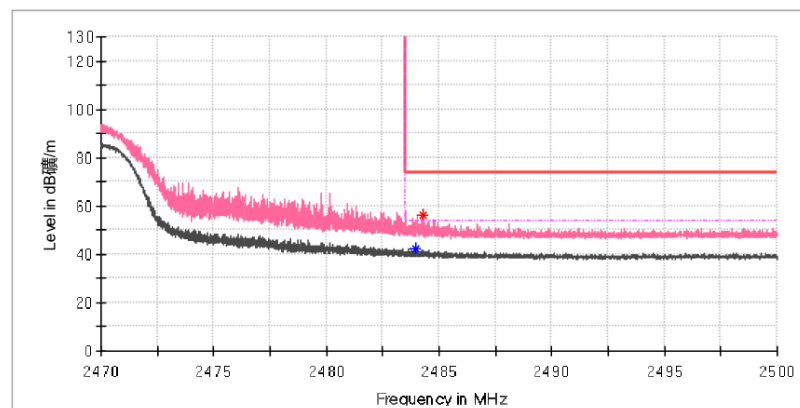

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.989706	---	42.36	54.00	11.64	100.0	V	140.0	7.4
2484.289706	56.28	---	74.00	17.72	100.0	V	140.0	7.4

29/4/2020

8:28:30 PM

H36GSC_G6A17W0201170002


EMI Auto Test(1)

1 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17W0201170002
Test Mode:	TX_WIFI2.4G_11n_CH1
Test Voltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

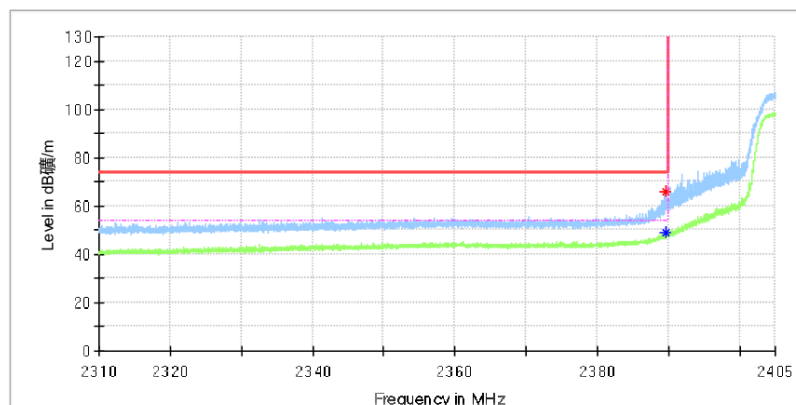

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.590441	65.92	---	74.00	8.08	100.0	H	306.0	7.0
2389.744118	---	49.08	54.00	4.92	100.0	H	12.0	7.0

29/4/2020

6:30:33 PM


EMI Auto Test(1)

2 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17W0201170002
TestMode:	TX_WIFI2.4G_11n_CH1
Test Voltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

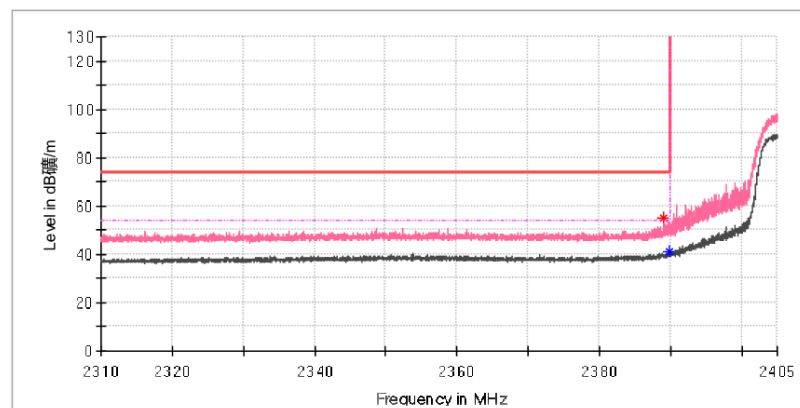

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.961765	54.95	---	74.00	19.05	100.0	V	279.0	7.0
2389.786029	---	41.34	54.00	12.66	100.0	V	187.0	7.0

29/4/2020

6:30:33 PM


EMI Auto Test(1)

3 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17W0201170002
TestMode:	TX_WIFI2.4G_11n_CH11
TestVoltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

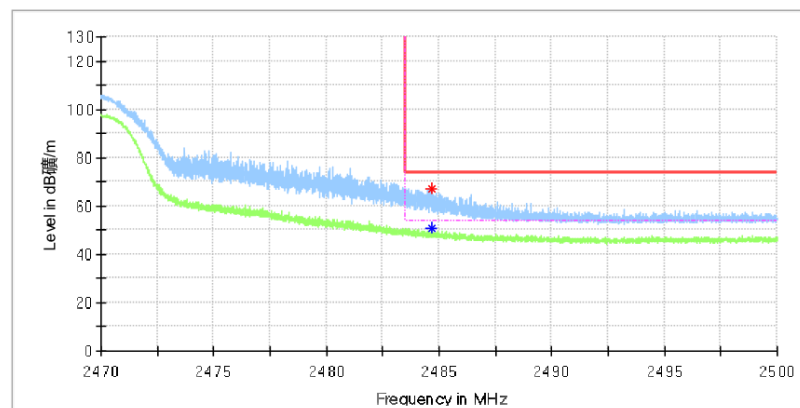

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.673530	67.19	---	74.00	6.81	100.0	H	1.0	7.4
2484.673530	---	50.51	54.00	3.49	100.0	H	1.0	7.4

29/4/2020

6:30:33 PM


EMI Auto Test(1)

4 / 4

Test Report

EUT Information

EUT Name:	Monty
Model:	EVT_G6A17W0201170002
TestMode:	TX_WIFI2.4G_11n_CH11
Test Voltage::	DC 5V from adaptor
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

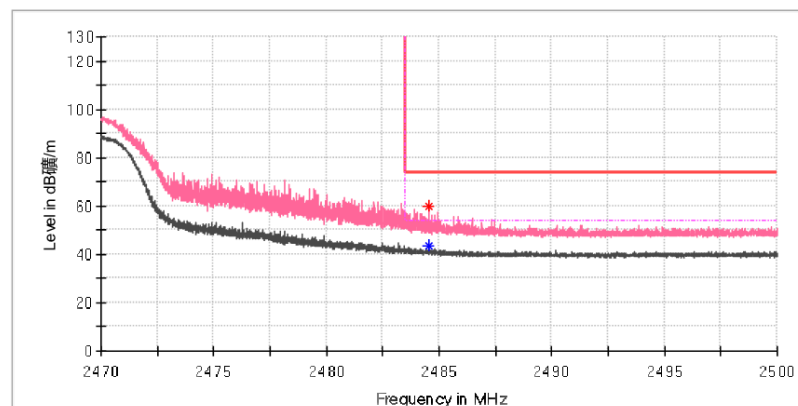

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.532353	---	43.80	54.00	10.20	100.0	V	171.0	7.4
2484.532353	59.73	---	74.00	14.27	100.0	V	171.0	7.4

29/4/2020

6:30:33 PM

Appendix C.7: Test Results of Conducted Emissions

H36GSA

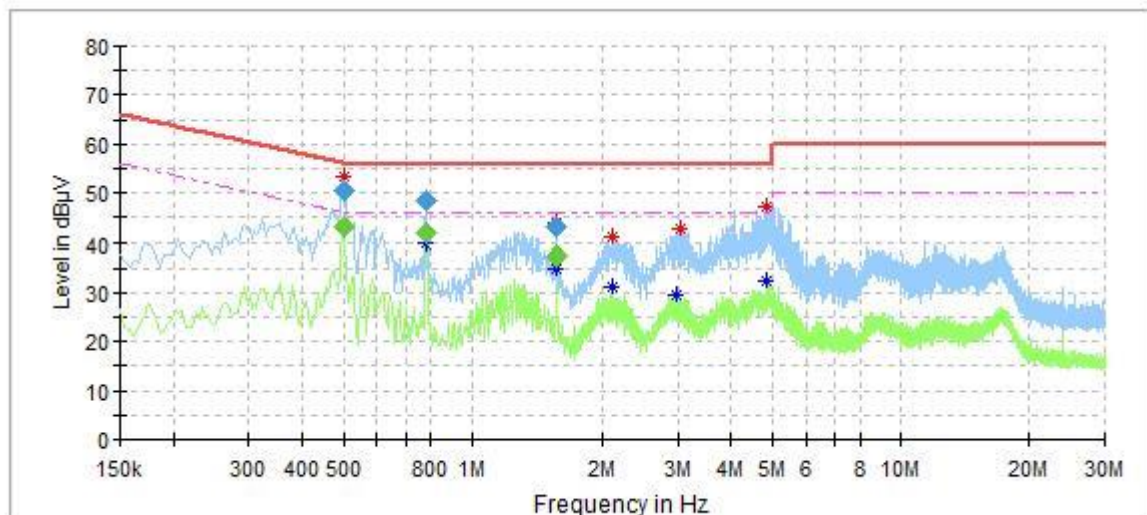


Critical_Freqs

Frequency (MHz)	Max Peak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.500000	53.19	---	56.03	2.85	L1	9.7
0.500000	---	43.02	46.03	3.01	L1	9.7
0.783500	---	39.78	46.00	6.22	L1	9.7
0.783500	48.43	---	56.00	7.57	L1	9.7
1.563500	---	34.93	46.00	11.07	L1	9.7
1.564500	43.71	---	56.00	12.29	L1	9.7
2.108000	41.08	---	56.00	14.92	L1	9.7
2.108000	---	31.13	46.00	14.87	L1	9.7
2.988000	---	29.67	46.00	16.33	L1	9.8
3.048000	42.58	---	56.00	13.42	L1	9.8
4.868000	---	32.22	46.00	13.78	L1	9.9
4.868000	47.03	---	56.00	8.97	L1	9.9

Final_Result

Frequency (MHz)	Quasi Peak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.500000	---	43.17	46.00	2.83	200.0	9.000	L1	9.7
0.500000	50.44	---	56.00	5.56	200.0	9.000	L1	9.7
0.783500	---	41.98	46.00	4.02	200.0	9.000	L1	9.7
0.783500	48.51	---	56.00	7.49	200.0	9.000	L1	9.7
1.563500	---	37.21	46.00	8.79	200.0	9.000	L1	9.7
1.564500	43.07	---	56.00	12.93	200.0	9.000	L1	9.7

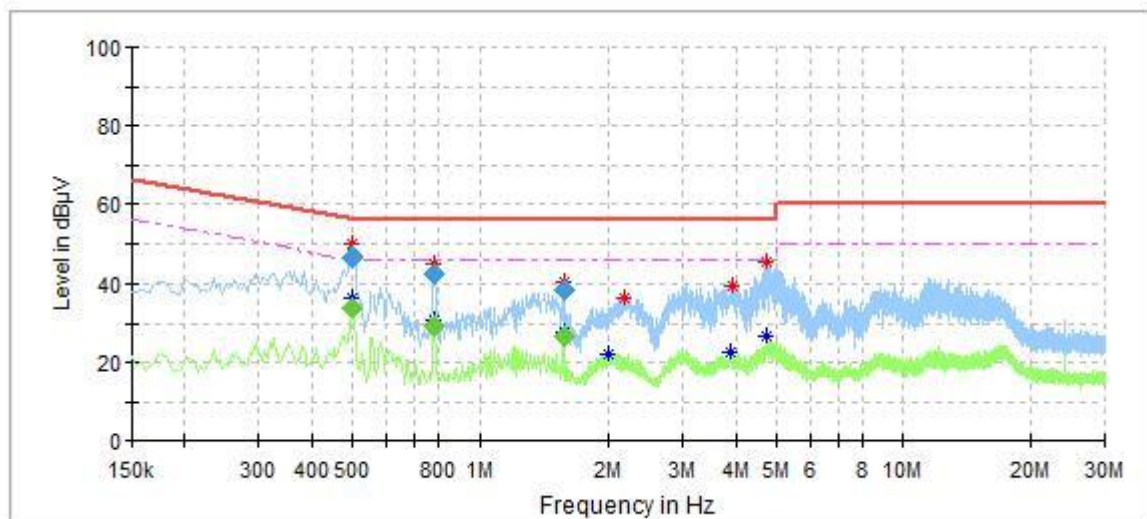


Critical_Freqs

Frequency (MHz)	Max Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.500000	49.57	---	56.00	6.43	N	9.7
0.500000	---	36.38	46.00	9.62	N	9.7
0.779500	---	30.61	46.00	15.39	N	9.7
0.779500	45.05	---	56.00	10.95	N	9.7
1.563500	---	27.68	46.00	18.32	N	9.7
1.563500	40.62	---	56.00	15.38	N	9.7
1.996000	---	22.11	46.00	23.89	N	9.7
2.180000	36.25	---	56.00	19.75	N	9.7
3.888000	---	22.31	46.00	23.69	N	9.8
3.928000	39.27	---	56.00	16.73	N	9.8
4.736000	45.39	---	56.00	10.61	N	9.9
4.752000	---	26.91	46.00	19.09	N	9.9

Final_Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.500000	---	34.04	46.00	11.96	200.0	9.000	N	9.7
0.500000	46.88	---	56.00	9.12	200.0	9.000	N	9.7
0.779500	---	29.47	46.00	16.53	200.0	9.000	N	9.7
0.779500	42.82	---	56.00	13.18	200.0	9.000	N	9.7
1.563500	---	26.65	46.00	19.35	200.0	9.000	N	9.7
1.563500	38.71	---	56.00	17.29	200.0	9.000	N	9.7

H36GSB

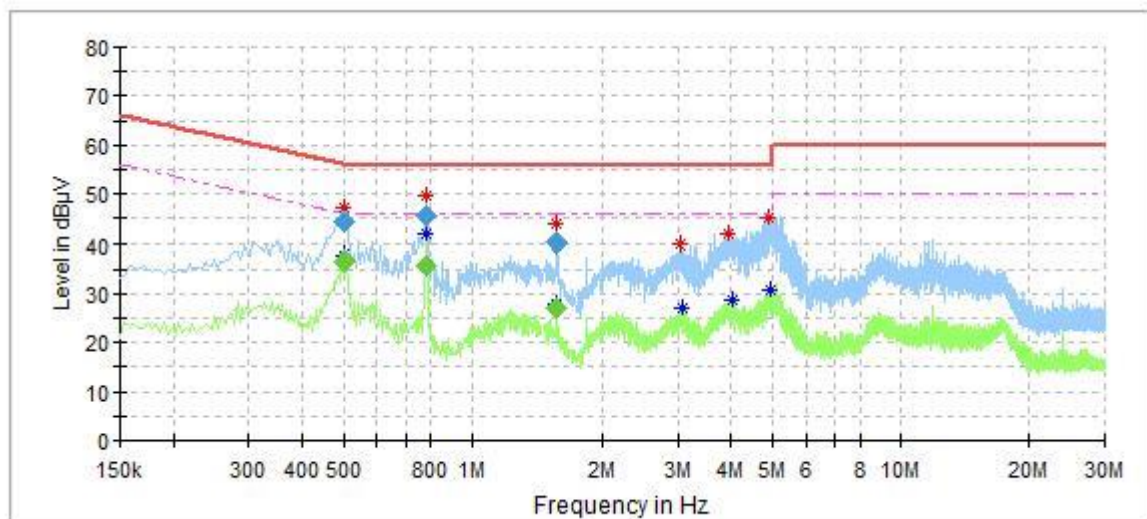


Critical_Freqs

Frequency (MHz)	Max Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.504000	---	37.80	46.00	8.20	L1	9.7
0.504000	47.14	---	56.00	8.86	L1	9.7
0.783500	49.63	---	56.00	6.37	L1	9.7
0.783500	---	42.02	46.00	3.98	L1	9.7
1.559500	---	28.04	46.00	17.96	L1	9.7
1.563500	43.75	---	56.00	12.25	L1	9.7
3.056000	39.79	---	56.00	16.21	L1	9.8
3.080000	---	26.99	46.00	19.01	L1	9.8
3.932000	41.75	---	56.00	14.25	L1	9.8
4.024000	---	28.92	46.00	17.08	L1	9.8
4.892000	45.15	---	56.00	10.85	L1	9.9
4.968000	---	30.89	46.00	15.11	L1	9.9

Final_Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.504000	---	36.51	46.00	9.49	200.0	9.000	L1	9.7
0.504000	44.51	---	56.00	11.49	200.0	9.000	L1	9.7
0.783500	---	35.64	46.00	10.36	200.0	9.000	L1	9.7
0.783500	45.54	---	56.00	10.46	200.0	9.000	L1	9.7
1.559500	---	27.08	46.00	18.92	200.0	9.000	L1	9.7
1.563500	40.25	---	56.00	15.75	200.0	9.000	L1	9.7

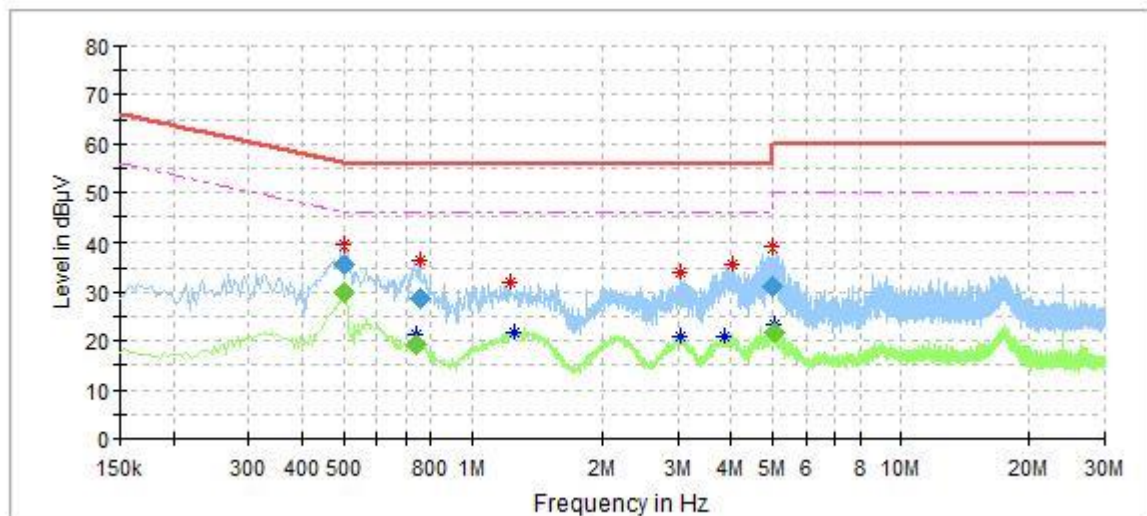


Critical_Freqs

Frequency (MHz)	Max Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.500000	---	30.22	46.00	15.78	N	9.7
0.504500	39.46	---	56.00	16.54	N	9.7
0.739500	---	21.31	46.00	24.69	N	9.7
0.756500	36.48	---	56.00	19.52	N	9.7
1.232000	32.00	---	56.00	24.00	N	9.7
1.252000	---	21.94	46.00	24.06	N	9.7
3.056000	---	20.77	46.00	25.23	N	9.8
3.056000	33.96	---	56.00	22.04	N	9.8
3.880000	---	21.11	46.00	24.89	N	9.8
4.040000	35.60	---	56.00	20.40	N	9.8
4.983500	38.90	---	56.00	17.10	N	9.9
5.043500	---	23.49	50.00	26.51	N	9.9

Final_Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.500000	---	29.92	46.00	16.08	200.0	9.000	N	9.7
0.504500	35.70	---	56.00	20.30	200.0	9.000	N	9.7
0.739500	---	19.16	46.00	26.84	200.0	9.000	N	9.7
0.756500	28.75	---	56.00	27.25	200.0	9.000	N	9.7
4.983500	31.11	---	56.00	24.89	200.0	9.000	N	9.9
5.043500	---	21.85	50.00	28.15	200.0	9.000	N	9.9

H36GSC

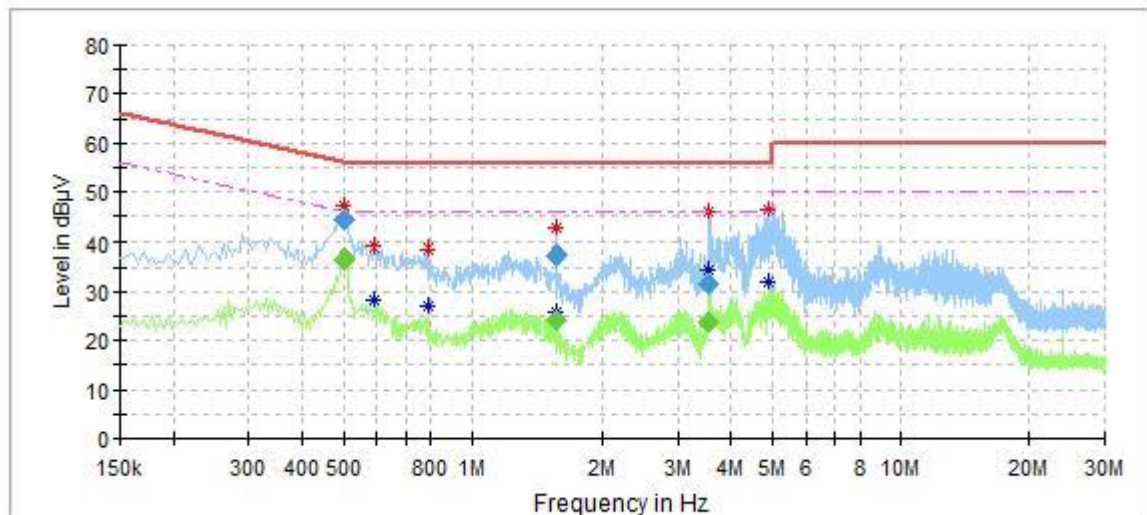


Critical_Freqs

Frequency (MHz)	Max Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.504500	47.01	---	56.00	8.99	L1	9.7
0.504500	---	36.42	46.00	9.58	L1	9.7
0.588000	---	28.44	46.00	17.56	L1	9.7
0.592000	39.03	---	56.00	16.97	L1	9.7
0.788000	---	27.10	46.00	18.90	L1	9.7
0.788000	38.54	---	56.00	17.46	L1	9.7
1.564500	---	25.94	46.00	20.06	L1	9.7
1.564500	42.52	---	56.00	13.48	L1	9.7
3.551500	---	34.59	46.00	11.41	L1	9.8
3.551500	45.91	---	56.00	10.09	L1	9.8
4.896000	46.28	---	56.00	9.72	L1	9.9
4.896000	---	32.04	46.00	13.96	L1	9.9

Final_Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.504500	---	36.55	46.00	9.45	200.0	9.000	L1	9.7
0.504500	44.32	---	56.00	11.68	200.0	9.000	L1	9.7
1.564500	---	24.22	46.00	21.78	200.0	9.000	L1	9.7
1.564500	37.52	---	56.00	18.48	200.0	9.000	L1	9.7
3.551500	---	23.90	46.00	22.10	200.0	9.000	L1	9.8
3.551500	31.73	---	56.00	24.27	200.0	9.000	L1	9.8

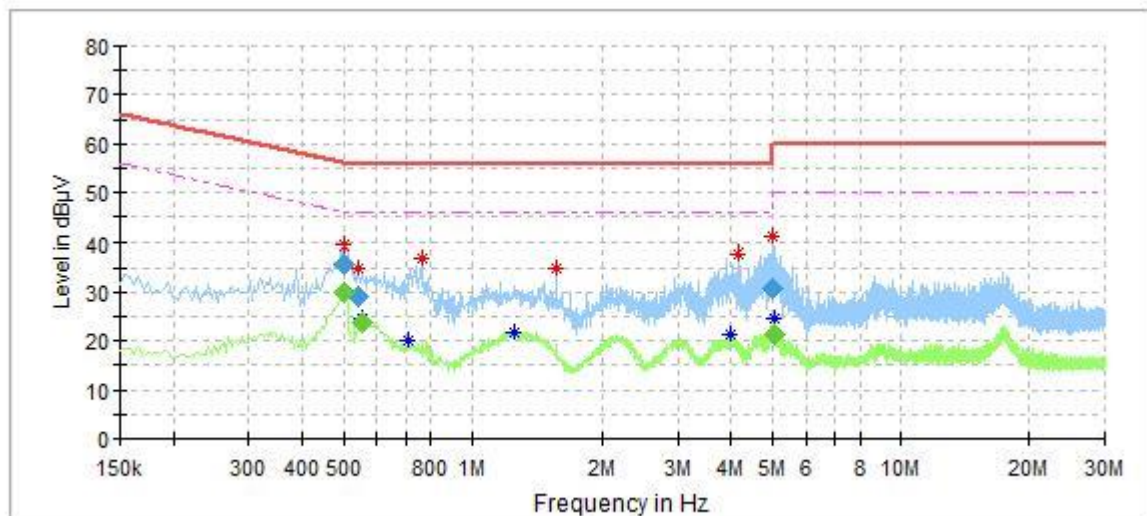

Critical_Freqs

Frequency (MHz)	Max Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.503500	39.53	---	56.00	16.47	N	9.7
0.504000	---	29.47	46.00	16.53	N	9.7
0.543500	34.69	---	56.00	21.31	N	9.7
0.551500	---	24.65	46.00	21.35	N	9.7
0.712000	---	20.10	46.00	25.90	N	9.7
0.764000	36.73	---	56.00	19.27	N	9.7
1.256000	---	21.62	46.00	24.38	N	9.7
1.560000	34.82	---	56.00	21.18	N	9.7
4.000000	---	21.17	46.00	24.83	N	9.8
4.184000	37.75	---	56.00	18.25	N	9.8
4.991500	40.91	---	56.00	15.09	N	9.9
5.068500	---	24.59	50.00	25.41	N	9.9

Final_Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.503500	35.62	---	56.00	20.38	200.0	9.000	N	9.7
0.504000	---	29.90	46.00	16.10	200.0	9.000	N	9.7
0.543500	29.11	---	56.00	26.89	200.0	9.000	N	9.7
0.551500	---	23.84	46.00	22.16	200.0	9.000	N	9.7
4.991500	30.93	---	56.00	25.07	200.0	9.000	N	9.9
5.068500	---	21.15	50.00	28.85	200.0	9.000	N	9.9