

FCC RF TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Mobile Phone

ISSUED TO
Realme Chongqing Mobile Telecommunications Corp., Ltd.
No.2 Building, No.24 Nichang Boulevard, Huixing Block, Yubei District,
Chongqing, China



Prepared by: 
Heng Aiping
(Engineer)
Date: Dec. 24, 2019
Approved by: 
Wei Yanquan
(Chief Engineer)
Date: Dec. 24, 2019

Report No.: BL-SZ19A0595-604
EUT Name: Mobile Phone
Model Name: RMX1971
Brand Name: realme
Test Standard: 47 CFR Part 15 Subpart E
FCC ID: 2AUYFRMX1971

Test Conclusion: Pass
Test Date: Nov. 01, 2019 ~ Nov. 14, 2019
Date of Issue: Dec. 24, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Dec. 06, 2019</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Dec. 24, 2019</u>	<u>Corrected limit on page 31-32</u> <u>Update Band Edge test data on</u> <u>page 112-115</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant	5
2.2	Manufacturer	5
2.3	Factory	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Technical Information	6
2.6	Additional Instructions	7
2.7	Channel List	10
3	SUMMARY OF TEST RESULTS.....	13
3.1	Test Standards.....	13
3.2	Verdict	13
4	GENERAL TEST CONFIGURATIONS.....	14
4.1	Test Environments	14
4.2	Test Equipment List	14
4.3	Measurement Uncertainty	15
4.4	Description of Test Setup	16
5	TEST ITEMS.....	19
5.1	RF Output Power	19
5.2	Emission Bandwidth and 6 dB Bandwidth.....	20
5.3	Power Spectral density (PSD).....	21

5.4	Conducted Emission	22
5.5	Conducted Spurious Emission and Band Edge (Authorized-band)	23
5.6	Radiated Spurious Emissions and Band Edge (Restricted-band).....	25
5.7	Frequency Stability.....	30
ANNEX A	TEST RESULT	31
A.1	RF Output Power	31
A.2	Emission Bandwidth & 99% Bandwidth	33
A.3	6 dB Bandwidth	35
A.4	Power Spectral Density	36
A.5	Conducted Emissions	38
A.6	Conducted Spurious Emission and Band Edge (Authorized-band)	40
A.7	Radiated Spurious Emissions and Band Edge (Restricted-band).....	42
A.8	Frequency Stability.....	119
ANNEX B	TEST SETUP PHOTOS	121
ANNEX C	EUT EXTERNAL PHOTOS	121
ANNEX D	EUT INTERNAL PHOTOS	121

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v4.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant

Applicant	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address	No.2 Building, No.24 Nichang Boulevard, Huixing Block, Yubei District, Chongqing, China

2.2 Manufacturer

Manufacturer	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address	No.2 Building, No.24 Nichang Boulevard, Huixing Block, Yubei District, Chongqing, China

2.3 Factory

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	RMX1971
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	11
Software Version	ColorOS V6.0
Dimensions (Approx.)	157.0 mm × 74.2 mm × 8.9 mm
Weight (Approx.)	184 g(with battery)

2.5 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/900/1800/1900 MHz 3G Network WCDMA/HSDPA/HSUPA/HSPA+ Band 1/5/8 4G Network FDD LTE Band 1/3/5/7/8/20/28 TDD LTE Band 38/40/41 LTE CA Downlink (DL): 1C/ 3C/ 38C/ 40C/ 41C Bluetooth 5.0 (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) 5G WIFI 802.11a, 802.11n(HT20/40) and 802.11ac(VHT20/ 40/ 80) GPS, GLONASS, BDS, FM
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	Band I: 5150 MHz to 5250 MHz, Band II: 5250 MHz to 5350 MHz, Band III: 5470 MHz to 5725 MHz Band IV: 5725 MHz to 5850 MHz
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Modulation technology	OFDM
Modulation Type	256QAM, 64QAM, 16QAM, BPSK, QPSK
Product Type	Indoor for IC standard Mobile and portable for FCC standard
Transfer Rate (Mbps) (Single RF path)	802.11a: 54/ 48/ 36 / 24 / 18/12 / 9/ 6 Mbps 802.11n: up to 150 Mbps 802.11ac: up to VHT-MCS9
Channel Bandwidth	802.11a: 20 MHz 802.11n: 20 MHz, 40 MHz 802.11ac: 20 MHz, 40 MHz, 80 MHz
Maximum Output Power	Band I: 15.97 dBm Band II: 15.51 dBm Band III: 16.62 dBm Band IV: 15.08 dBm
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna Type	PIFA Antenna
Antenna Gain	Band I: 5150 MHz to 5250 MHz: -3 dBi Band II: 5250 MHz to 5350 MHz: -3 dBi Band III: 5470 MHz to 5725 MHz: -3 dBi Band IV: 5725 MHz to 5850 MHz: -3 dBi
About the Product	The equipment is Mobile Phone, intended for used with information technology equipment.

2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	QRCT		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220

Band I (5150 - 5250 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	36	5180	13.00
	44	5220	13.00
	48	5240	13.00
11n (HT20)	36	5180	13.00
	44	5220	13.00
	48	5240	13.00
11n (HT40)	38	5190	10.50
	46	5230	13.00
11ac (VHT20)	36	5180	12.50
	44	5220	13.00
	48	5240	13.00
11c (VHT40)	38	5190	9.50
	46	5230	13.00
11ac (VHT80)	42	5210	9.00

Band II (5250 - 5350 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	52	5260	13.00
	60	5300	13.00
	64	5320	13.00
11n (HT20)	52	5260	13.00
	60	5300	13.00
	64	5320	13.00
11n (HT40)	54	5270	13.00
	62	5310	13.00
11ac (VHT20)	52	5260	13.00
	60	5300	13.00
	64	5320	13.00
11c (VHT40)	54	5270	13.00
	62	5310	13.00
11ac (VHT80)	58	5290	12.50

Band III (5470 - 5725 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	100	5500	15.00
	116	5580	15.00
	140	5700	15.00
11n (HT20)	100	5500	15.00
	116	5580	15.00
	140	5700	15.00
11n (HT40)	102	5510	15.00
	118	5590	15.00
	134	5670	15.00
11ac (VHT20)	100	5500	15.00
	116	5580	15.00
	140	5700	15.00
11c (VHT40)	102	5510	15.00
	118	5590	15.00
	134	5670	15.00
11ac (VHT80)	106	5530	13.50
	122	5610	15.00

Band IV (5725 - 5850 MHz) Power level setup in software			
Mode	Channel	Frequency (MHz)	Soft Set
11a	149	5745	13.0
	157	5785	13.0
	165	5825	13.0
11n (HT20)	149	5745	13.0
	157	5785	13.0
	165	5825	13.0
11n (HT40)	151	5755	13.0
	159	5795	13.0
11ac (VHT20)	149	5745	13.0
	157	5785	13.0
	165	5825	13.0
11c (VHT40)	151	5755	13.0
	159	5795	13.0
11ac (VHT80)	155	5775	13.0

Run Software

WLAN

Radio Control | MAC/OTP Settings | GoldenBinGen |

Tx | Tx2 | Rx | Rx2 |

TRANSMITTER SETTINGS

PhyA only RF Mode PhyA PhyId

Cont Tx TX99 TX Mode 0 # of Packets (0 for Cont. TX)

116 (5580) Channel (MHz) Enable ANI Algorithm

1 (2412) Channel2 (MHz) On Scrambler

TxPowerForce_CLPC TX Power Control 1 AIFSN

17 TX Power (dBm) 1500 Packet Size

No HT HT Mode 0 Antenna

RATE_6Mbps Data Rate TxChain0 TX Chain

PN9_PATTERN TX Pattern 0 Gain Index

Don't Use Short Guard 0 Dac Gain

1 Aggregate 0 PA CFG

0 IFS Unicast broadcast/Unicast

99 Duty Cycle (0~100%) Set Instance

STOP TX SET TX ON

Flags Setting

☐ LDPC ☐ STBC ☒ DPDmode ☐ HeavyClip

Select Reg Domain

UNRESTRICTED

2.7 Channel List

20 MHz		40 MHz		80 MHz	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	58	5290
44	5220	54	5270	106	5530
48	5240	62	5310	122	5610
52	5260	102	5510	155	5775
56	5280	110	5550		
60	5300	118	5590		
64	5320	134	5670		
100	5500	151	5755		
104	5520	159	5795		
108	5540				
112	5560				
116	5580				
132	5660				
136	5680				
140	5700				
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

Note: Until further notice, devices subject to this section shall not be capable of transmitting in the band 5600-5650 MHz. This restriction is for the protection of weather radars operating in this band.

The Lowest frequency, the middle frequency and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(VHT20)

Band I (5150 - 5250 MHz)			Band II (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	52	Low	5260
44	Mid	5220	60	Mid	5300
48	High	5240	64	High	5320

Band III (5470 - 5725 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
100	Low	5500	149	Low	5745
116	Mid	5580	157	Mid	5785
140	High	5700	165	High	5825

For 802.11n(HT40)/ac(VHT40)

Band I (5150 - 5250 MHz)			Band II (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	54	Low	5270
46	High	5230	62	High	5310

Band III (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
102	Low	5510	151	Low	5755
118	Mid	5590	159	High	5795
134	High	5670			

For 802.11ac(VHT80)

Band I (5150 - 5250 MHz)			Band II (5250 - 5350 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
42	Mid	5210	58	Mid	5290

Band III (5470 - 5725 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
106	Low	5530	155	Mid	5775
122	High	5610			

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Modulation Type	Band I	Band II	Band III	Band IV
				Channel	Channel	Channel	Channel
RF Output Power	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	MCS0		42	58	122/106	155
Emission Bandwidth & 99% Occupied Bandwidth	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	MCS0		42	58	122/106	155
6 dB bandwidth	11a	6	BPSK	N/A	N/A	N/A	165/157/149
	11n(20 MHz)	6.5		N/A	N/A	N/A	165/157/149
	11n(40 MHz)	13.5		N/A	N/A	N/A	159/151

	11ac(20 MHz)	6.5		N/A	N/A	N/A	165/157/149
	11ac(40 MHz)	13.5		N/A	N/A	N/A	159/151
	11ac(80 MHz)	MCS0		N/A	N/A	N/A	155
Power Spectral Density	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	MCS0		42	58	122/106	155
Conducted Spurious Emission and Band Edge (Authorized-band)	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	MCS0		42	58	122/106	155
Radiated Spurious Emissions	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	MCS0		42	58	122/106	155
Band Edge (Restricted-band)	11a	6	BPSK	48/44/36	64/60/52	140/116/100	165/157/149
	11n(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11n(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(20 MHz)	6.5		48/44/36	64/60/52	140/116/100	165/157/149
	11ac(40 MHz)	13.5		46/38	62/54	134/118/102	159/151
	11ac(80 MHz)	MCS0		42	58	122/106	155
Frequency Stability	Unmodulated	N/A	N/A	36	N/A	N/A	165

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E (10-1-16 Edition)	Unlicensed National Information Infrastructure Devices
2	KDB Publication 789033 D02v01r04	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note1}
2	RF Output Power	15.407(a)	ANNEX A.1	Pass
3	Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	ANNEX A.2	Pass
4	6 dB bandwidth	15.407(e)	ANNEX A.3	Pass
5	Power Spectral Density	15.407(a)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Conducted Spurious Emission and Band Edge (Authorized-band)	15.407(b) 15.209	ANNEX A.6	Pass
8	Radiated Spurious Emissions and Band Edge (Restricted-band)	15.407(b)	ANNEX A.7	Pass
9	Frequency Stability	15.407(g)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	--	N/A ^{Note2}
Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203. Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable				

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
	LT (Low Temperature)	0°C
	HT (High Temperature)	+35°C
Working Voltage of the EUT	NV (Normal Voltage)	3.85 V
	LV (Low Voltage)	3.6 V
	HV (High Voltage)	4.4 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2019.06.13	2020.06.12
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2019.06.13	2020.06.12
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2019.10.29	2020.10.28
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2019.06.13	2020.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2019.06.13	2020.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2019.06.15	2020.06.14
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2019.06.18	2020.06.17
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2019.06.15	2020.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2019.06.24	2020.06.23
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2020.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2018.08.22	2020.08.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.05	2021.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2020.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.07.19	2020.07.18
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2019.08.23	2020.08.22
Power Amplifier	OPHIR RF	5225F	1037	2019.02.28	2020.02.27
Power Amplifier	OPHIR RF	5273F	1016	2019.02.28	2020.02.27
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Sound Level Meter	B&K	NL-20	00844023	2019.11.12	2020.11.11
Ear Simulator	B&K	4185	2409449	2019.11.12	2020.11.11
Ear Simulator	B&K	4195	2418189	2019.11.12	2020.11.11
Audio analyzer	B&K	UPL 16	100129	2019.11.12	2020.11.11

4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

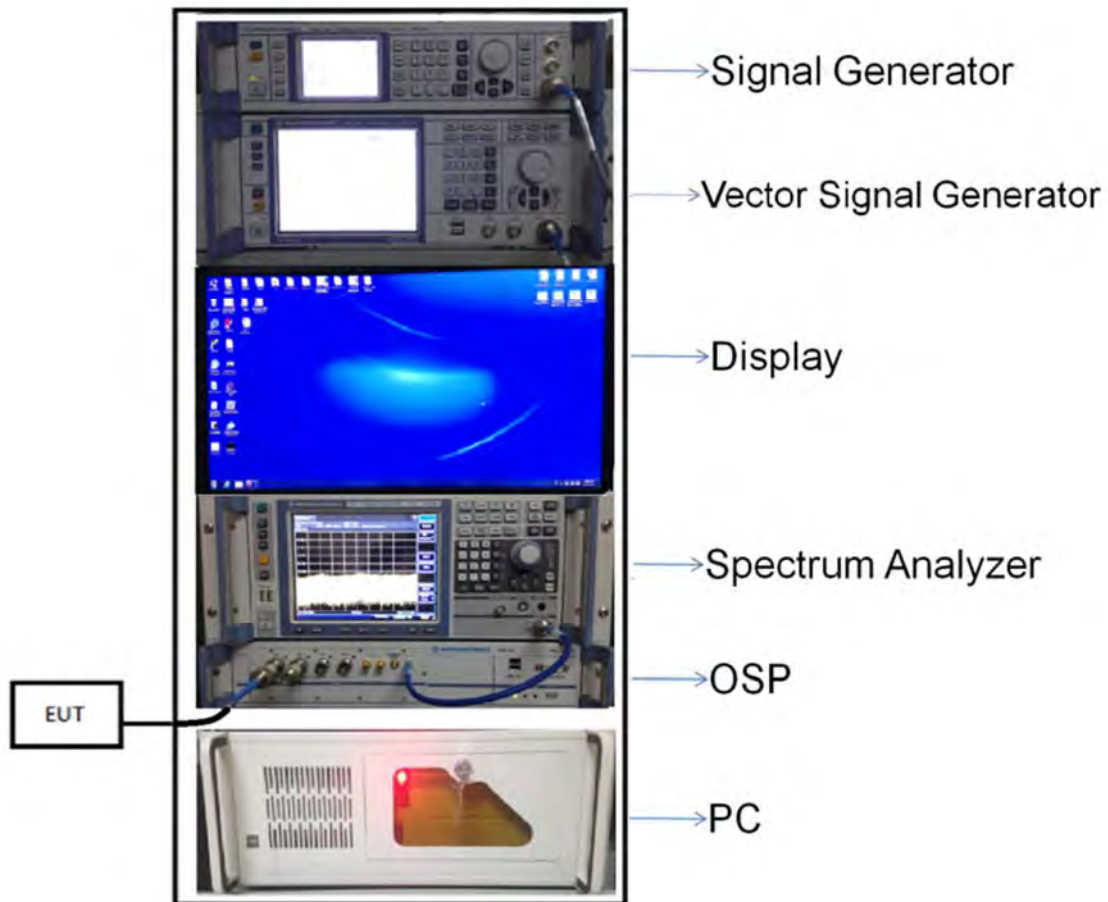


(Diagram 1)

4.4.2 For AC Power Supply Port Test

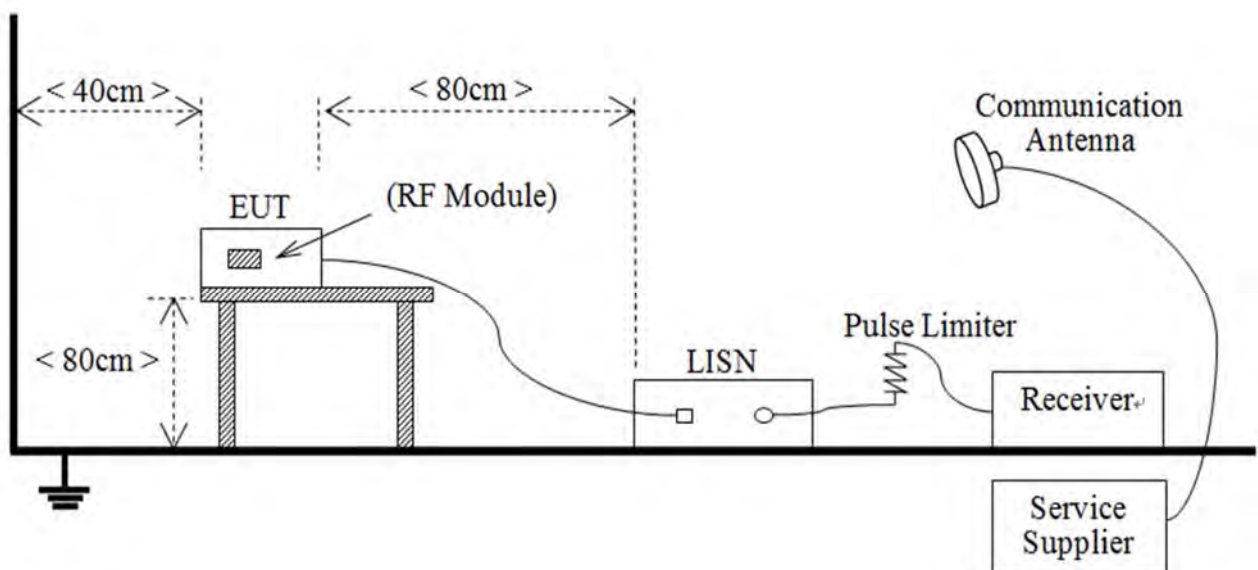


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

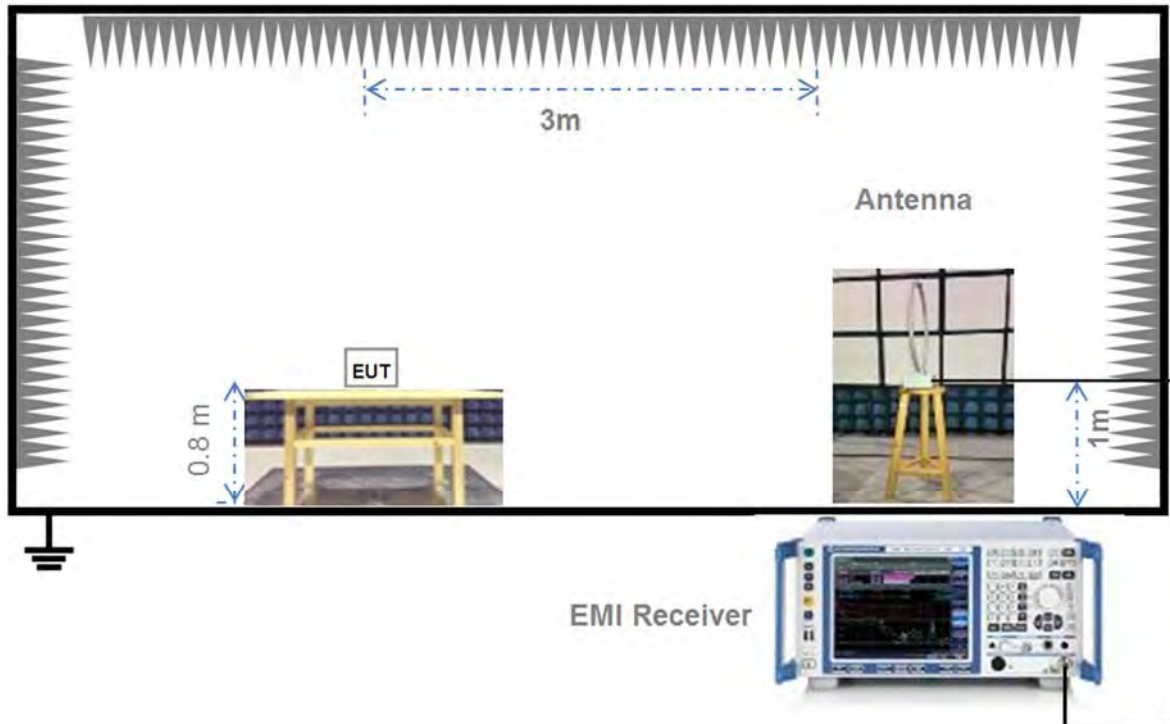


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

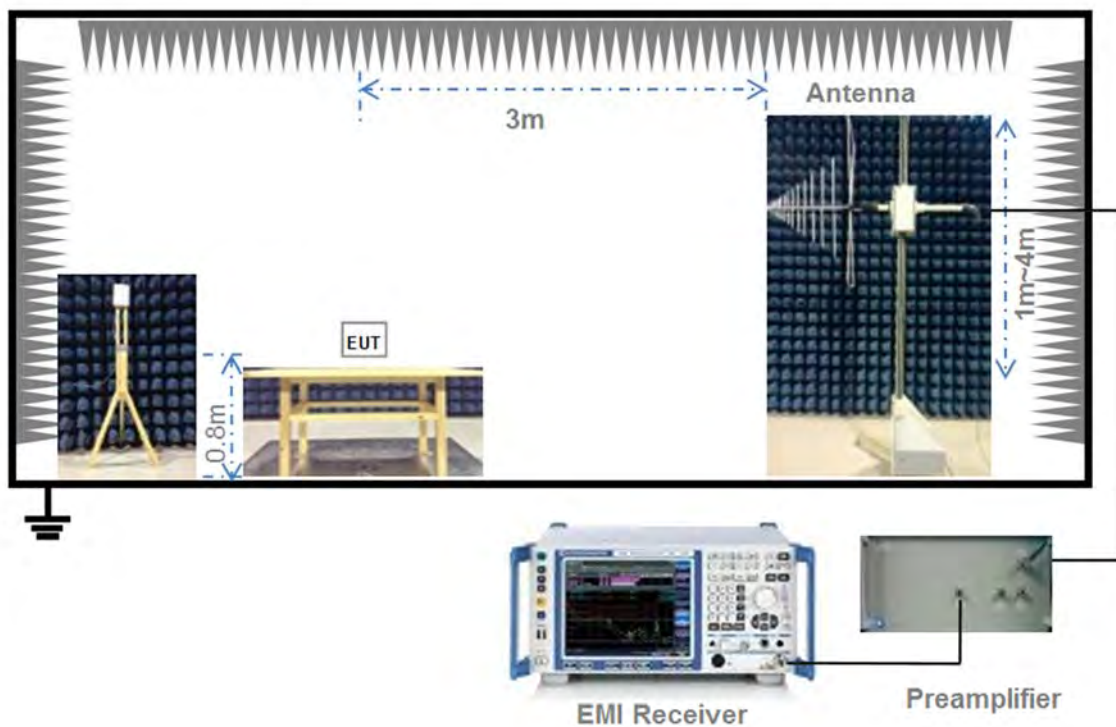


(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

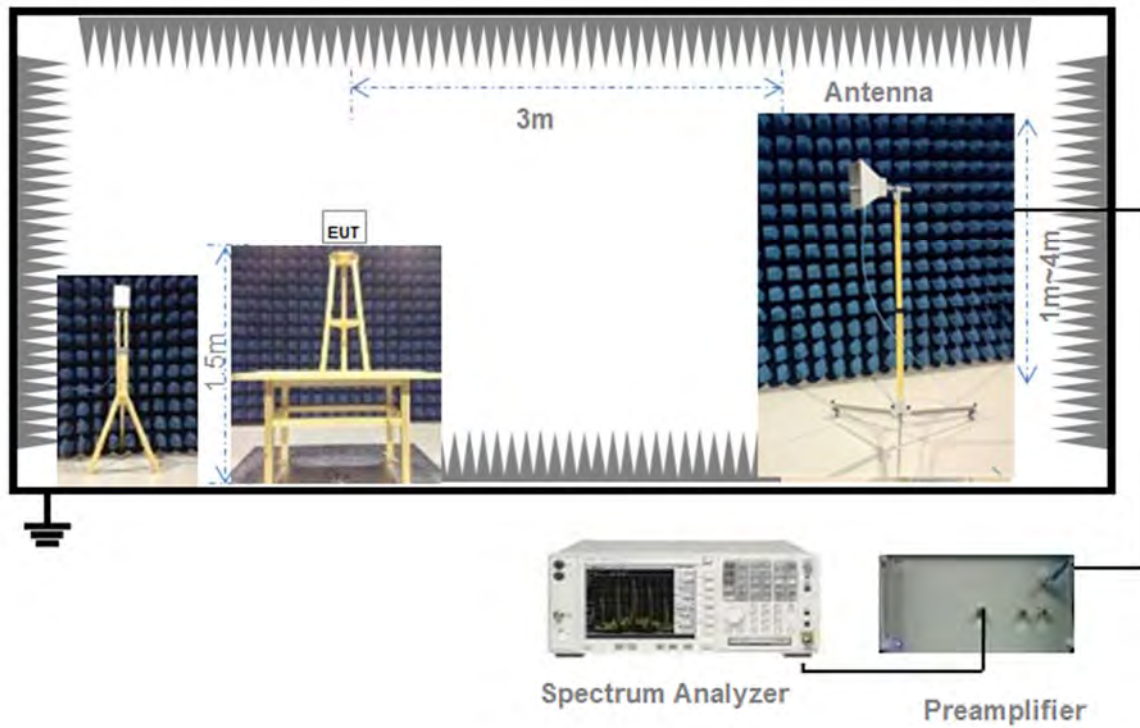

(Diagram 5)

4.4.6 For Frequency Stability Test

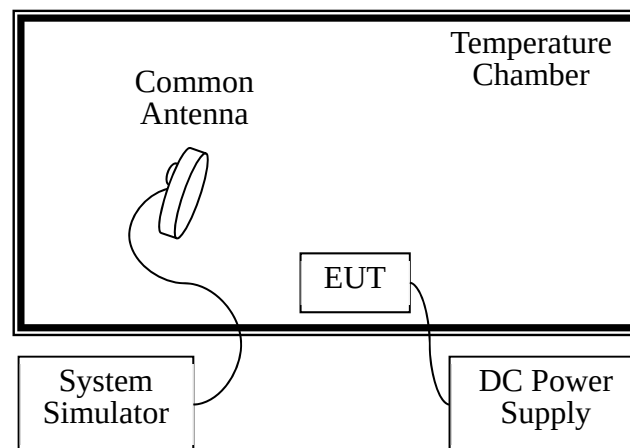

(Diagram 6)

5 TEST ITEMS

5.1 RF Output Power

5.1.1 Test Limit

FCC §15.407(a)

The maximum conducted output power should not exceed:

Frequency Band (MHz)	Limit
5150-5250	250 mW
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where "B" is the 26 dB emissions bandwidth in MHz.	

RSS-247, 6.2

The maximum conducted output power shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	250 mW or 11 dBm + 10log B, whichever is less.
5470-5725	250 mW or 11 dBm + 10log B, whichever is less.
5725-5850	1 W
Note: Where "B" is the 99% emissions bandwidth in MHz.	

The maximum e.i.r.p. shall not exceed:

Frequency Band (MHz)	Limit
5150-5250	200 mW or 10 dBm + 10log B, whichever is less.
5250-5350	1W or 17 dBm + 10log B, whichever is less.
5470-5725	1W or 17 dBm + 10log B, whichever is less.
5725-5850	N/A
Note: Where "B" is the 99% emissions bandwidth in MHz.	

5.1.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.1.3 Test Procedure

The maximum peak conducted output power may be measured using a broadband Average RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

The E.I.R.P used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.1.4 Test Result

Please refer to ANNEX A.1.

5.2 Emission Bandwidth and 6 dB Bandwidth

5.2.1 Limit

FCC §15.407(a), RSS-247, 6.2

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.2.2 Test Setup

The test setup photo please refer to 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Emission bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set VBW $\geq 3 \times$ RBW,
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

1. Set Span = 1.5 times to 5.0 times the OBW
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW $\geq 3 \times$ RBW, Detector = Peak.
4. Trace mode = Max hold.
5. Use the 99% power bandwidth function of the instrument.

6 dB bandwidth

1. Set RBW = 100 kHz, VBW = 300 kHz.
2. Detector = Peak. Trace mode = Max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2.4 Test Result

Please refer to ANNEX A.2 and ANNEX A.3.

5.3 Power Spectral density (PSD)

5.3.1 Limit

FCC §15.407(a)

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	11 dBm/MHz
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

RSS-247, 6.2

The maximum power spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	N/A
5250-5350	11 dBm/MHz
5470-5725	11 dBm/MHz
5725-5850	30 dBm/500kHz

The e.i.r.p. spectral density should not exceed:

Frequency Band (MHz)	Limit
5150-5250	10 dBm/MHz
5250-5350	N/A
5470-5725	N/A
5725-5850	N/A

5.3.2 Test Setup

The section 4.4.1 (Diagram 1) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth.

1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS.
2. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak marker function to determine the maximum amplitude level.
4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.

5.3.4 Test Result

Please refer to ANNEX A.4.

5.4 Conducted Emission

5.4.1 Limit

FCC §15.207, RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.4.2 Test Setup

The section 4.4.2 (Diagram 2) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


5.4.4 Test Result

Please refer to ANNEX A.5.

5.5 Conducted Spurious Emission and Band Edge (Authorized-band)

5.5.1 Limit

FCC §15.407(b)

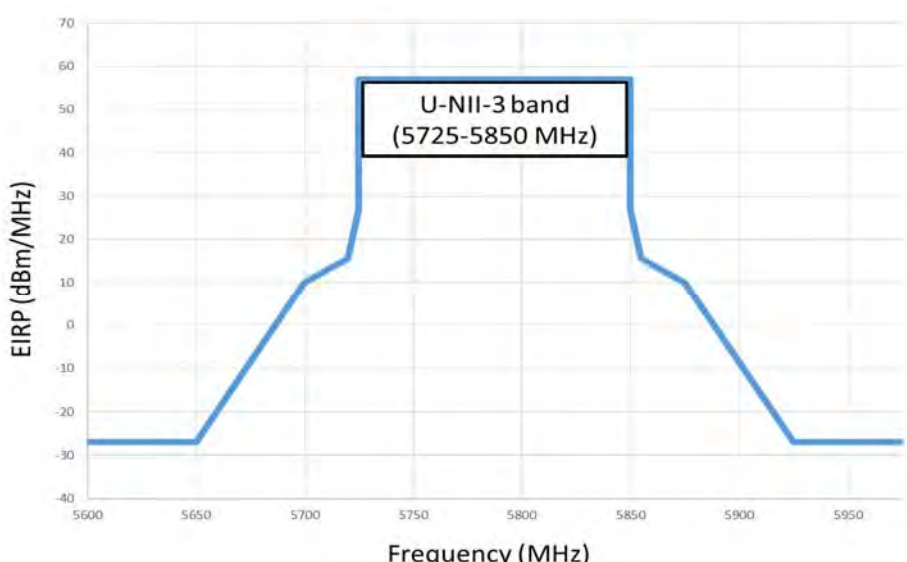Un-restricted band emissions	
Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. 

RSS-247, 6.2

Un-restricted band emissions	
Frequency Band (MHz)	Limit
5150 - 5250	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm, However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz.
5250 - 5350	Outside of the 5.15-5.35 GHz band: e.i.r.p. -27 dBm. And any emissions within the band 5150-5250 MHz shall meet the power spectral density limits of 10 dBm/MHz, The device shall be labelled "for indoor use only."
5470 - 5725	Outside of the 5.47-5.725 GHz band: e.i.r.p. -27 dBm
5725 - 5850	5715 -5725 MHz: e.i.r.p. -17 dBm 5850 -5860 MHz: e.i.r.p. -17 dBm Other un-restricted band: e.i.r.p. -27 dBm

5.5.2 Test Setup

See section 4.4.2 (Diagram 2) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.5.4 Test Result

Please refer to ANNEX A.6.

5.6 Radiated Spurious Emissions and Band Edge (Restricted-band)


5.6.1 Limit

FCC §15.209 & 15.407(b), RSS-247, 6.2

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note¹: The Limit for radiated test was performed according to FCC Part 15C

Note²: The tighter limit applies at the band edge.

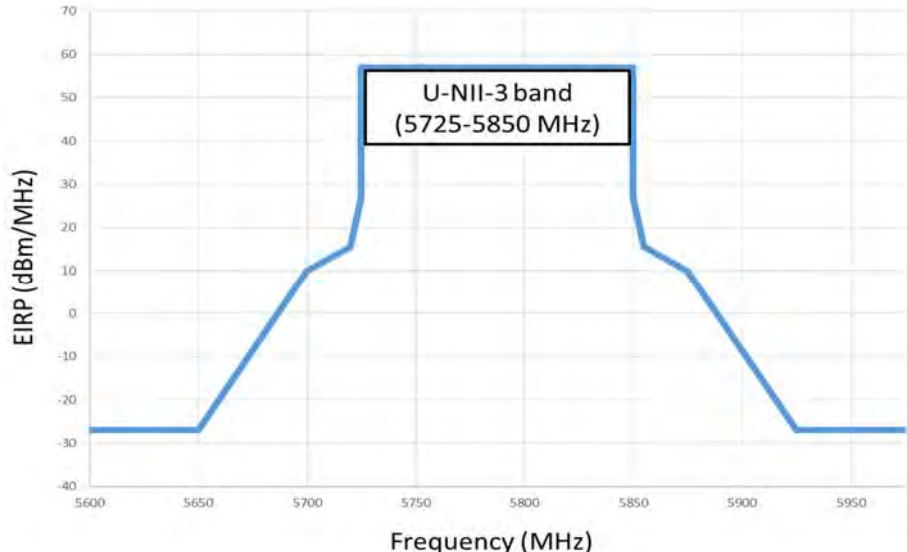Un-restricted band emissions	
Out Operating Band (MHz)	Limit
5150 - 5250	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5250 - 5350	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5470 - 5725	e.i.r.p. -27 dBm (68.2 dBuV/m@3m)
5725 - 5850	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.  The graph plots EIRP (dBm/MHz) on the y-axis (ranging from -40 to 70) against Frequency (MHz) on the x-axis (ranging from 5600 to 5950). A blue line represents the emission limit. It is flat at -27 dBm/MHz from 5600 to 5650 MHz, then rises linearly to 27 dBm/MHz at 5725 MHz. It remains at 27 dBm/MHz until 5850 MHz, then falls linearly back to -27 dBm/MHz at 5925 MHz, and remains flat at -27 dBm/MHz until 5950 MHz. A box labeled 'U-NII-3 band (5725-5850 MHz)' is placed over the top flat portion of the graph.

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength.

5.6.2 Test Setup

The section 4.4.3-4.4.5 (Diagram 3 - Diagram 5) test setup description was used for this test. The photo of test

setup please refer to ANNEX B.

5.6.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band

emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.6.4 Test Result

Please refer to ANNEX A.7 and Please refer to ANNEX A.9

5.7 Frequency Stability

5.7.1 Limit

FCC §15.407(g)

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

5.7.2 Test Setup

The section 4.4.6 (Diagram 6) test setup description was used for this test. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT is installed in an environment test chamber with external power source.

Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.

A sufficient stabilization period at each temperatures is used prior to each frequency measurement.

When temperature is stabled, measure the frequency stability.

The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage.

Change setting of chamber and external power source to complete all conditions.

5.7.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 RF Output Power

Note ¹: For FCC standard, if transmitting antennas of directional gain greater than 6 dBi are used, all band maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Data

Conducted Power

Band I (5150 - 5250 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH36	15.55	35.89	250	Pass
11a	CH44	15.72	37.33	250	Pass
11a	CH48	15.77	37.76	250	Pass
11n (HT20)	CH36	15.45	35.08	250	Pass
11n (HT20)	CH44	15.58	36.14	250	Pass
11n (HT20)	CH48	15.68	36.98	250	Pass
11n (HT40)	CH38	13.30	21.38	250	Pass
11n (HT40)	CH46	15.92	39.08	250	Pass
11ac (VHT20)	CH36	15.00	31.62	250	Pass
11ac (VHT20)	CH44	15.55	35.89	250	Pass
11ac (HVT20)	CH48	15.60	36.31	250	Pass
11ac (VHT40)	CH38	11.35	13.65	250	Pass
11ac (VHT40)	CH46	15.97	39.54	250	Pass
11ac (VHT80)	CH42	11.08	12.82	250	Pass

Band II (5250 - 5350 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH52	15.36	34.36	250	Pass
11a	CH60	15.18	32.96	250	Pass
11a	CH64	15.10	32.36	250	Pass
11n (HT20)	CH52	15.20	33.11	250	Pass
11n (HT20)	CH60	15.00	31.62	250	Pass
11n (HT20)	CH64	14.84	30.48	250	Pass
11n (HT40)	CH54	15.51	35.56	250	Pass
11n (HT40)	CH62	15.23	33.34	250	Pass
11ac (VHT20)	CH52	15.15	32.73	250	Pass
11ac (VHT20)	CH60	15.00	31.62	250	Pass
11ac (HVT20)	CH64	14.87	30.69	250	Pass
11ac (VHT40)	CH54	15.51	35.56	250	Pass
11ac (VHT40)	CH62	15.23	33.34	250	Pass
11ac (VHT80)	CH58	14.72	29.65	250	Pass

Band III (5470 - 5725 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH100	16.62	45.92	250	Pass
11a	CH116	16.29	42.56	250	Pass
11a	CH140	16.20	41.69	250	Pass
11n (HT20)	CH100	16.56	45.29	250	Pass
11n (HT20)	CH116	16.23	41.98	250	Pass
11n (HT20)	CH140	16.17	41.40	250	Pass
11n (HT40)	CH102	16.51	44.77	250	Pass
11n (HT40)	CH134	16.40	43.65	250	Pass
11n (HT40)	CH134	16.16	41.30	250	Pass
11ac (VHT20)	CH100	16.56	45.29	250	Pass
11ac (VHT20)	CH116	16.21	41.78	250	Pass
11ac (HVT20)	CH140	16.17	41.40	250	Pass
11ac (VHT40)	CH102	16.52	44.87	250	Pass
11ac (VHT40)	CH118	16.42	43.85	250	Pass
11ac (VHT40)	CH134	16.13	41.02	250	Pass
11ac (VHT80)	CH106	15.00	31.62	250	Pass
11ac (VHT80)	CH122	16.35	43.15	250	Pass

Band IV (5725 - 5850 MHz)					
Mode	Channel	Conducted Power (dBm)	Conducted Power (mW)	FCC Limit (mW)	Verdict
11a	CH149	14.87	30.69	1000	Pass
11a	CH157	15.00	31.62	1000	Pass
11a	CH165	14.64	29.11	1000	Pass
11n (HT20)	CH149	14.80	30.20	1000	Pass
11n (HT20)	CH157	14.91	30.97	1000	Pass
11n (HT20)	CH165	14.57	28.64	1000	Pass
11n (HT40)	CH151	14.90	30.90	1000	Pass
11n (HT40)	CH159	15.05	31.99	1000	Pass
11ac (VHT20)	CH149	14.77	29.99	1000	Pass
11ac (VHT20)	CH157	14.91	30.97	1000	Pass
11ac (HVT20)	CH165	14.57	28.64	1000	Pass
11ac (VHT40)	CH151	14.93	31.12	1000	Pass
11ac (VHT40)	CH159	15.08	32.21	1000	Pass
11ac (VHT80)	CH155	15.02	31.77	1000	Pass

A.2 Emission Bandwidth & 99% Bandwidth

Note: Test plots please refer to the document "Annex No.: BL-SZ19A0595-604 Data Part 1.pdf".

Test Data

Band I (5150 - 5250 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH36	21.28	16.56
11a	CH44	21.08	16.56
11a	CH48	21.16	16.50
11n (HT20)	CH36	21.68	17.77
11n (HT20)	CH44	21.64	17.77
11n (HT20)	CH48	21.68	17.77
11n (HT40)	CH38	41.00	36.35
11n (HT40)	CH46	40.70	36.12
11ac (VHT20)	CH36	22.04	17.83
11ac (VHT20)	CH44	22.08	17.77
11ac (HVT20)	CH48	21.72	17.71
11ac (VHT40)	CH38	41.10	36.35
11ac (VHT40)	CH46	40.60	36.12
11ac (VHT80)	CH42	83.80	75.95

Band II (5250 - 5350 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH52	21.16	16.50
11a	CH60	21.12	16.50
11a	CH64	20.96	16.50
11n (HT20)	CH52	21.72	17.83
11n (HT20)	CH60	21.68	17.77
11n (HT20)	CH64	21.52	17.77
11n (HT40)	CH54	40.90	36.35
11n (HT40)	CH62	40.40	36.12
11ac (VHT20)	CH52	21.68	17.83
11ac (VHT20)	CH60	21.76	17.77
11ac (HVT20)	CH64	22.08	17.77
11ac (VHT40)	CH54	41.10	36.35
11ac (VHT40)	CH62	40.40	36.12
11ac (VHT80)	CH58	83.00	75.95

Band III (5470 - 5725 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH100	21.24	16.56
11a	CH116	21.20	16.56
11a	CH140	21.20	16.56
11n (HT20)	CH100	21.84	17.83
11n (HT20)	CH116	21.84	17.83
11n (HT20)	CH140	21.96	17.77
11n (HT40)	CH102	41.00	36.24
11n (HT40)	CH118	41.10	36.24
11n (HT40)	CH134	41.00	36.35
11ac (VHT20)	CH100	21.76	17.83
11ac (VHT20)	CH116	21.80	17.77
11ac (HVT20)	CH140	21.80	17.77
11ac (VHT40)	CH102	41.10	36.24
11ac (VHT40)	CH118	41.00	36.24
11ac (VHT40)	CH134	41.10	36.35
11ac (VHT80)	CH106	83.40	75.95
11ac (VHT80)	CH122	83.40	75.72

Band IV (5725 - 5850 MHz)			
Mode	Channel	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	CH149	21.28	16.56
11a	CH157	21.04	16.56
11a	CH165	21.16	16.56
11n (HT20)	CH149	21.88	17.77
11n (HT20)	CH157	21.72	17.77
11n (HT20)	CH165	21.80	17.77
11n (HT40)	CH151	40.90	36.35
11n (HT40)	CH159	40.80	36.24
11ac (VHT20)	CH149	22.08	17.77
11ac (VHT20)	CH157	21.68	17.77
11ac (HVT20)	CH165	21.80	17.77
11ac (VHT40)	CH151	40.90	36.12
11ac (VHT40)	CH159	40.80	36.24
11ac (VHT80)	CH155	83.60	75.72

A.3 6 dB Bandwidth

Note: Test plots please refer to the document "Annex No.: BL-SZ19A0595-604 Data Part 2.pdf".

Test Data

Band IV (5725 - 5850 MHz)				
Mode	Channel	6 dB Bandwidth (MHz)	Limit (kHz)	Verdict
11a	CH149	16.47	500.00	Pass
11a	CH157	16.52	500.00	Pass
11a	CH165	16.47	500.00	Pass
11n (HT20)	CH149	17.67	500.00	Pass
11n (HT20)	CH157	17.52	500.00	Pass
11n (HT20)	CH165	17.67	500.00	Pass
11n (HT40)	CH151	36.42	500.00	Pass
11n (HT40)	CH159	36.57	500.00	Pass
11ac (VHT20)	CH149	17.67	500.00	Pass
11ac (VHT20)	CH157	17.67	500.00	Pass
11ac (HVT20)	CH165	17.67	500.00	Pass
11ac (VHT40)	CH151	36.37	500.00	Pass
11ac (VHT40)	CH159	36.42	500.00	Pass
11ac (VHT80)	CH155	75.27	500.00	Pass

A.4 Power Spectral Density

Note: Test plots please refer to the document "Annex No.: BL-SZ19A0595-604 Data Part 3.pdf".

Test Data

Note ¹: The RBW used in Band IV is 1 MHz, and the PSD factor is: $10 \cdot \log(500 \text{ kHz/RBW}) = -3 \text{ dBm}$.

Band I (5150 - 5250 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH36	4.02	11.00	Pass
11a	CH44	4.48	11.00	Pass
11a	CH48	5.07	11.00	Pass
11n (HT20)	CH36	3.63	11.00	Pass
11n (HT20)	CH44	3.92	11.00	Pass
11n (HT20)	CH48	4.95	11.00	Pass
11n (HT40)	CH38	-2.13	11.00	Pass
11n (HT40)	CH46	0.93	11.00	Pass
11ac (VHT20)	CH36	3.21	11.00	Pass
11ac (VHT20)	CH44	3.86	11.00	Pass
11ac (HVT20)	CH48	4.66	11.00	Pass
11ac (VHT40)	CH38	-4.27	11.00	Pass
11ac (VHT40)	CH46	0.92	11.00	Pass
11ac (VHT80)	CH42	-8.82	11.00	Pass

Band II (5250 - 5350 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH52	4.39	11.00	Pass
11a	CH60	4.05	11.00	Pass
11a	CH64	4.13	11.00	Pass
11n (HT20)	CH52	3.99	11.00	Pass
11n (HT20)	CH60	3.85	11.00	Pass
11n (HT20)	CH64	3.84	11.00	Pass
11n (HT40)	CH54	-0.10	11.00	Pass
11n (HT40)	CH62	0.47	11.00	Pass
11ac (VHT20)	CH52	3.87	11.00	Pass
11ac (VHT20)	CH60	3.41	11.00	Pass
11ac (HVT20)	CH64	3.68	11.00	Pass
11ac (VHT40)	CH54	-0.10	11.00	Pass
11ac (VHT40)	CH62	0.06	11.00	Pass
11ac (VHT80)	CH58	-4.22	11.00	Pass

Band III (5470 - 5725 MHz)				
Mode	Channel	PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
11a	CH100	5.19	11.00	Pass
11a	CH116	4.62	11.00	Pass
11a	CH140	4.53	11.00	Pass
11n (HT20)	CH100	4.74	11.00	Pass
11n (HT20)	CH116	4.16	11.00	Pass
11n (HT20)	CH140	4.10	11.00	Pass
11n (HT40)	CH102	0.86	11.00	Pass
11n (HT40)	CH118	0.60	11.00	Pass
11n (HT40)	CH134	-0.50	11.00	Pass
11ac (VHT20)	CH100	4.60	11.00	Pass
11ac (VHT20)	CH116	4.47	11.00	Pass
11ac (HVT20)	CH140	3.97	11.00	Pass
11ac (VHT40)	CH102	0.85	11.00	Pass
11ac (VHT40)	CH118	0.84	11.00	Pass
11ac (VHT40)	CH134	0.04	11.00	Pass
11ac (VHT80)	CH106	-4.54	11.00	Pass
11ac (VHT80)	CH122	-3.78	11.00	Pass

Band IV (5725 - 5850 MHz)				
Mode	Channel	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
11a	CH149	0.91	30.00	Pass
11a	CH157	1.69	30.00	Pass
11a	CH165	1.05	30.00	Pass
11n (HT20)	CH149	0.53	30.00	Pass
11n (HT20)	CH157	1.16	30.00	Pass
11n (HT20)	CH165	0.12	30.00	Pass
11n (HT40)	CH151	-2.82	30.00	Pass
11n (HT40)	CH159	-2.00	30.00	Pass
11ac (VHT20)	CH149	0.49	30.00	Pass
11ac (VHT20)	CH157	1.26	30.00	Pass
11ac (HVT20)	CH165	0.27	30.00	Pass
11ac (VHT40)	CH151	-3.66	30.00	Pass
11ac (VHT40)	CH159	-2.76	30.00	Pass
11ac (VHT80)	CH155	-7.43	30.00	Pass

A.5 Conducted Emissions


Note¹: The EUT is working in the Normal link mode.

Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

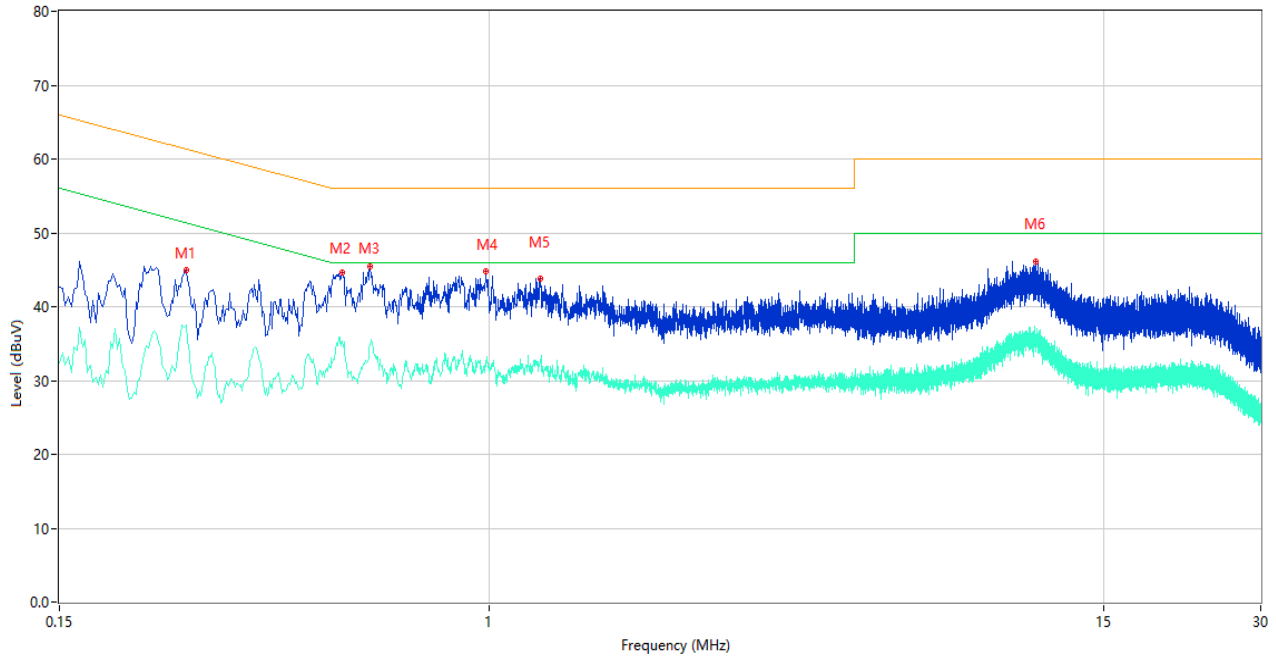

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.262	44.98	10.34	61.37	-16.39	Peak	L	Pass
1**	0.262	37.45	10.34	51.37	-13.92	AV	L	Pass
2	0.522	44.59	10.30	56.00	-11.41	Peak	L	Pass
2**	0.522	35.39	10.30	46.00	-10.61	AV	L	Pass
3	0.590	45.37	10.28	56.00	-10.63	Peak	L	Pass
3**	0.590	34.69	10.28	46.00	-11.31	AV	L	Pass
4	0.986	44.79	10.23	56.00	-11.21	Peak	L	Pass
4**	0.986	32.34	10.23	46.00	-13.66	AV	L	Pass
5	1.254	43.88	10.25	56.00	-12.12	Peak	L	Pass
5**	1.254	32.52	10.25	46.00	-13.48	AV	L	Pass
6	11.120	46.11	10.38	60.00	-13.89	Peak	L	Pass
6**	11.120	35.29	10.38	50.00	-14.71	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

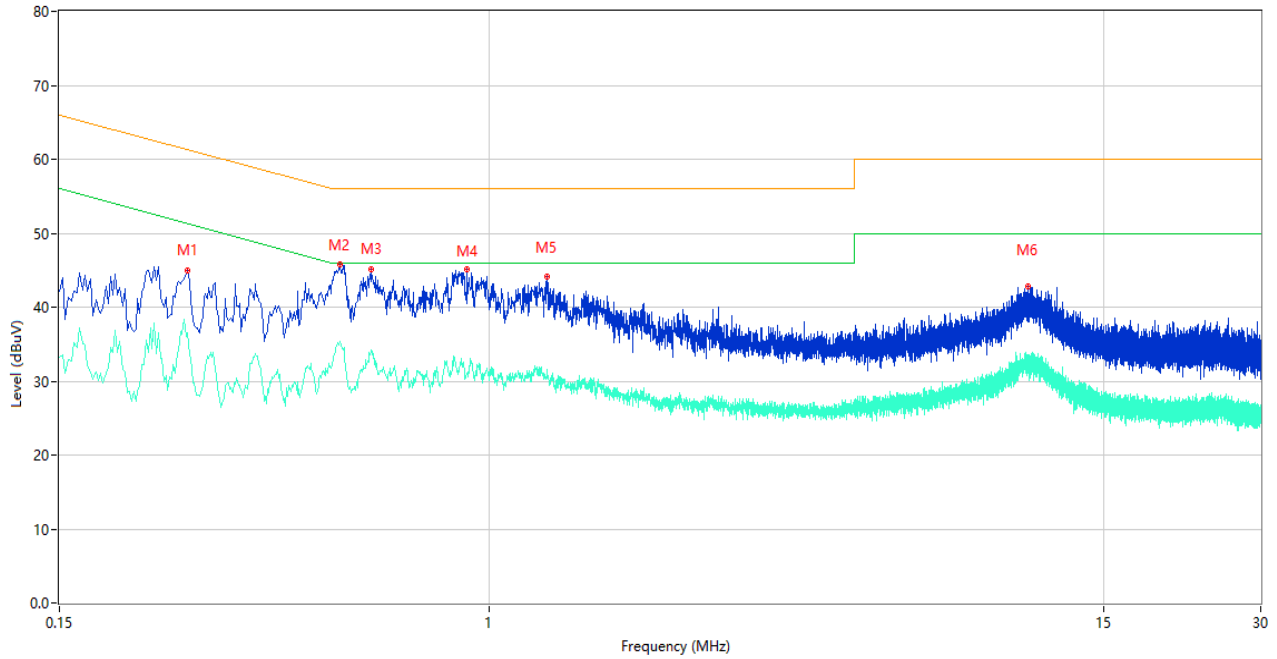

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.264	44.93	10.34	61.30	-16.37	Peak	N	Pass
1**	0.264	36.47	10.34	51.30	-14.83	AV	N	Pass
2	0.516	45.74	10.30	56.00	-10.26	Peak	N	Pass
2**	0.516	35.23	10.30	46.00	-10.77	AV	N	Pass
3	0.592	45.08	10.28	56.00	-10.92	Peak	N	Pass
3**	0.592	33.92	10.28	46.00	-12.08	AV	N	Pass
4	0.906	45.14	10.24	56.00	-10.86	Peak	N	Pass
4**	0.906	30.97	10.24	46.00	-15.03	AV	N	Pass
5	1.286	44.18	10.25	56.00	-11.82	Peak	N	Pass
5**	1.286	30.64	10.25	46.00	-15.36	AV	N	Pass
6	10.774	42.87	10.38	60.00	-17.13	Peak	N	Pass
6**	10.774	32.68	10.38	50.00	-17.32	AV	N	Pass

A.6 Conducted Spurious Emission and Band Edge (Authorized-band)

Note ¹: Test plots please refer to the document “Annex No.: BL-SZ19A0595-604 Data Part 4.pdf”.

Test Band	Mode	Channel	Verdict
Band I	802.11a	Low	Pass
		Middle	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
Band II	802.11a	Middle	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
Band III	802.11a	Middle	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		Middle	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		Middle	Pass
		High	Pass

Band IV	802.11ac(VHT80)	Low	Pass
		High	Pass
	802.11a	Low	Pass
		Middle	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		Middle	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
	802.11ac(VHT80)	Middle	Pass

A.7 Radiated Spurious Emissions and Band Edge (Restricted-band)

Test Data


Note¹: The symbol of "--" in the table which means not application.

Note²: For the test data above 1 GHz, According the ANSI C63.4, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note⁴: The EUT is working in the Normal link mode below 1 GHz.

30 MHz to 1 GHz, ANT V

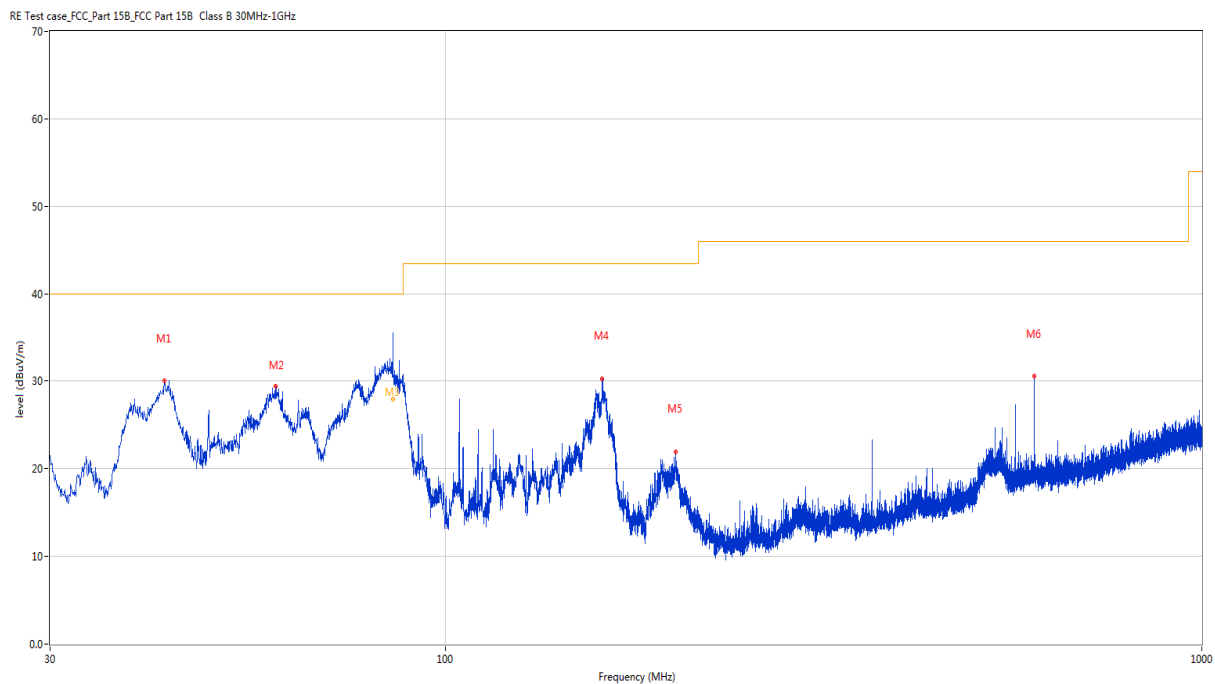

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.513	29.97	-23.42	40.0	-10.03	Peak	274.80	100	Vertical	Pass
2	59.633	29.36	-23.96	40.0	-10.64	Peak	168.80	100	Vertical	Pass
3	85.168	36.40	-27.46	40.0	-3.60	Peak	198.80	107	Vertical	N/A
3*	85.168	27.85	-27.46	40.0	-12.15	QP	198.80	107	Vertical	Pass
4	161.241	30.20	-27.20	43.5	-13.30	Peak	0.00	200	Vertical	Pass
5	201.690	21.85	-23.84	43.5	-21.65	Peak	122.30	100	Vertical	Pass
6	599.972	30.50	-14.57	46.0	-15.50	Peak	359.20	200	Vertical	Pass

30 MHz to 1 GHz, ANT H

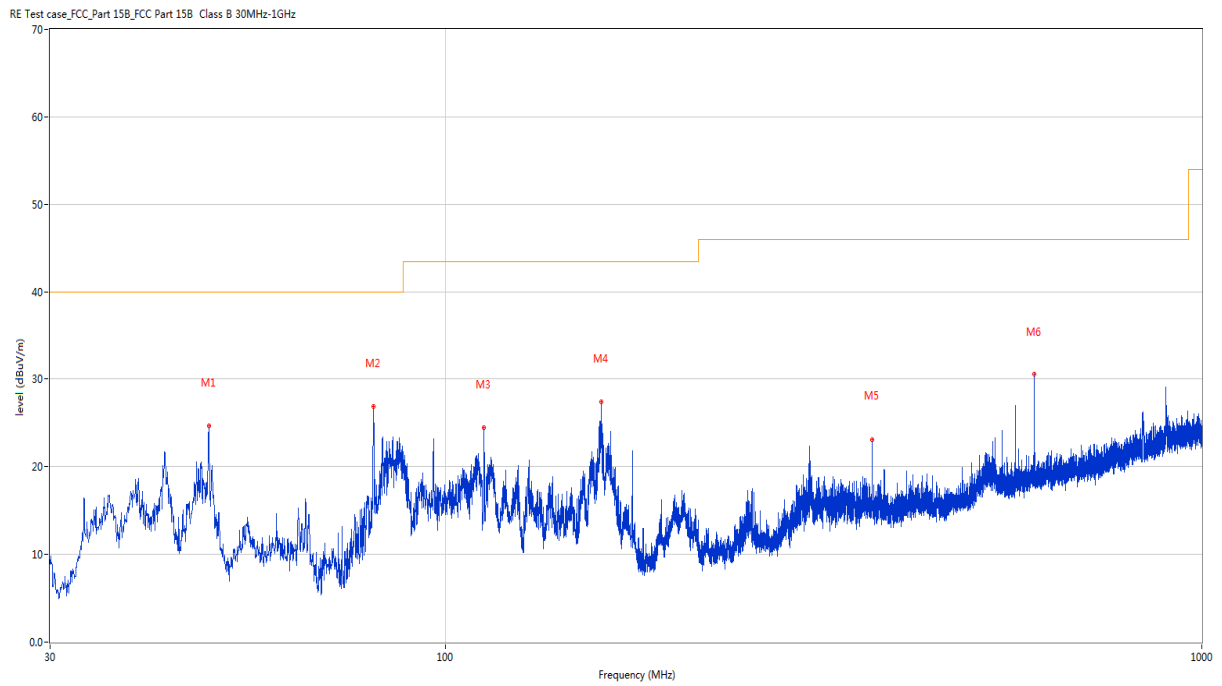

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.624	24.62	-22.51	40.0	-15.38	Peak	171.40	100	Horizontal	Pass
2	80.295	26.89	-28.47	40.0	-13.11	Peak	360.00	200	Horizontal	Pass
3	112.450	24.42	-24.43	43.5	-19.08	Peak	360.00	200	Horizontal	Pass
4	160.708	27.32	-27.27	43.5	-16.18	Peak	360.00	200	Horizontal	Pass
5	366.590	23.07	-19.86	46.0	-22.93	Peak	158.30	100	Horizontal	Pass
6	600.020	30.49	-14.57	46.0	-15.51	Peak	260.70	100	Horizontal	Pass

Note: The spurious above 18G is noise only, do not show on the report.

11a, Band I, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1526.500	40.51	-17.49	74.0	-33.49	Peak	10.00	150	Vertical	Pass
1**	1526.500	30.16	-17.49	54.0	-23.84	AV	10.00	150	Vertical	Pass
2	2760.000	49.66	-10.30	74.0	-24.34	Peak	360.00	150	Vertical	Pass
2**	2760.000	38.92	-10.30	54.0	-15.08	AV	360.00	150	Vertical	Pass
3	4051.000	52.62	-5.20	74.0	-21.38	Peak	224.00	150	Vertical	Pass
3**	4051.000	42.18	-5.20	54.0	-11.82	AV	224.00	150	Vertical	Pass
4	5179.000	104.00	-2.79	--	9.00	Peak	95.00	150	Vertical	N/A
4**	5179.000	95.02	-2.79	--	95.02	AV	95.00	150	Vertical	N/A
5	11503.688	50.02	0.20	74.0	-23.98	Peak	332.00	150	Vertical	Pass
5**	11503.688	39.44	0.20	54.0	-14.56	AV	332.00	150	Vertical	Pass
6	15518.063	54.14	2.48	74.0	-19.86	Peak	233.00	150	Vertical	Pass
6**	15518.063	43.50	2.48	54.0	-10.50	AV	233.00	150	Vertical	Pass

11a, Band I, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1555.500	40.91	-17.09	74.0	-33.09	Peak	342.00	150	Horizontal	Pass
1**	1555.500	30.32	-17.09	54.0	-23.68	AV	342.00	150	Horizontal	Pass
2	2777.500	50.24	-9.95	74.0	-23.76	Peak	302.00	150	Horizontal	Pass
2**	2777.500	38.83	-9.95	54.0	-15.17	AV	302.00	150	Horizontal	Pass
3	3976.000	52.56	-5.62	74.0	-21.44	Peak	135.00	150	Horizontal	Pass
3**	3976.000	41.48	-5.62	54.0	-12.52	AV	135.00	150	Horizontal	Pass
4	5179.000	112.18	-2.79	--	-49.82	Peak	162.00	150	Horizontal	N/A
4**	5179.000	102.88	-2.79	--	102.88	AV	162.00	150	Horizontal	N/A
5	6773.000	58.57	-0.81	68.2	-9.63	Peak	360.00	150	Horizontal	Pass
5**	6773.000	48.01	-0.81	--	48.01	AV	360.00	150	Horizontal	N/A
6	15648.000	53.80	1.62	74.0	-20.20	Peak	152.00	150	Horizontal	Pass
6**	15648.000	43.03	1.62	54.0	-10.97	AV	152.00	150	Horizontal	Pass

11a, Band I, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.000	41.76	-17.38	74.0	-32.24	Peak	259.00	150	Vertical	Pass
1**	1352.000	29.84	-17.38	54.0	-24.16	AV	259.00	150	Vertical	Pass
2	2366.000	47.45	-12.56	74.0	-26.55	Peak	349.00	150	Vertical	Pass
2**	2366.000	36.49	-12.56	54.0	-17.51	AV	349.00	150	Vertical	Pass
3	4046.000	53.49	-4.89	74.0	-20.51	Peak	349.00	150	Vertical	Pass
3**	4046.000	42.23	-4.89	54.0	-11.77	AV	349.00	150	Vertical	Pass
4	5219.000	102.95	-2.89	--	13.95	Peak	89.00	150	Vertical	N/A
4**	5219.000	95.78	-2.89	--	95.78	AV	89.00	150	Vertical	N/A
5	12084.437	51.37	0.80	74.0	-22.63	Peak	354.00	150	Vertical	Pass
5**	12084.437	40.33	0.80	54.0	-13.67	AV	354.00	150	Vertical	Pass
6	15477.375	54.20	1.75	74.0	-19.80	Peak	133.00	150	Vertical	Pass
6**	15477.375	42.59	1.75	54.0	-11.41	AV	133.00	150	Vertical	Pass

11a, Band I, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1178.000	40.30	-18.01	74.0	-33.70	Peak	154.00	150	Horizontal	Pass
1**	1178.000	28.48	-18.01	54.0	-25.52	AV	154.00	150	Horizontal	Pass
2	2794.500	48.51	-10.25	74.0	-25.49	Peak	0.00	150	Horizontal	Pass
2**	2794.500	38.42	-10.25	54.0	-15.58	AV	0.00	150	Horizontal	Pass
3	3649.000	52.79	-6.36	74.0	-21.21	Peak	349.00	150	Horizontal	Pass
3**	3649.000	43.61	-6.36	54.0	-10.39	AV	349.00	150	Horizontal	Pass
4	5220.000	110.43	-2.86	--	-74.57	Peak	185.00	150	Horizontal	N/A
4**	5220.000	103.83	-2.86	--	103.83	AV	185.00	150	Horizontal	N/A
5	7629.625	48.93	-2.91	74.0	-25.07	Peak	107.00	150	Horizontal	Pass
5**	7629.625	37.21	-2.91	54.0	-16.79	AV	107.00	150	Horizontal	Pass
6	15511.500	53.70	2.31	74.0	-20.30	Peak	84.00	150	Horizontal	Pass
6**	15511.500	43.77	2.31	54.0	-10.23	AV	84.00	150	Horizontal	Pass

11a, Band I, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1550.000	40.96	-17.35	74.0	-33.04	Peak	352.00	150	Vertical	Pass
1**	1550.000	30.05	-17.35	54.0	-23.95	AV	352.00	150	Vertical	Pass
2	3652.000	53.18	-6.35	74.0	-20.82	Peak	215.00	150	Vertical	Pass
2**	3652.000	43.40	-6.35	54.0	-10.60	AV	215.00	150	Vertical	Pass
3	5239.000	102.70	-2.86	--	-20.30	Peak	123.00	150	Vertical	N/A
3**	5239.000	95.78	-2.86	--	95.78	AV	123.00	150	Vertical	N/A
4	8187.375	48.02	-1.86	74.0	-25.98	Peak	295.00	150	Vertical	Pass
4**	8187.375	37.77	-1.86	54.0	-16.23	AV	295.00	150	Vertical	Pass
5	11040.812	50.20	0.04	74.0	-23.80	Peak	0.00	150	Vertical	Pass
5**	11040.812	39.75	0.04	54.0	-14.25	AV	0.00	150	Vertical	Pass
6	15558.750	54.57	2.28	74.0	-19.43	Peak	356.00	150	Vertical	Pass
6**	15558.750	43.51	2.28	54.0	-10.49	AV	356.00	150	Vertical	Pass

11a, Band I, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1540.000	40.96	-17.44	74.0	-33.04	Peak	22.00	150	Horizontal	Pass
1**	1540.000	29.55	-17.44	54.0	-24.45	AV	22.00	150	Horizontal	Pass
2	3649.000	52.68	-6.36	74.0	-21.32	Peak	9.00	150	Horizontal	Pass
2**	3649.000	43.58	-6.36	54.0	-10.42	AV	9.00	150	Horizontal	Pass
3	5241.000	110.11	-2.90	--	-69.89	Peak	180.00	150	Horizontal	N/A
3**	5241.000	103.45	-2.90	--	103.45	AV	180.00	150	Horizontal	N/A
4	8102.562	48.35	-1.97	74.0	-25.65	Peak	311.00	150	Horizontal	Pass
4**	8102.562	37.94	-1.97	54.0	-16.06	AV	311.00	150	Horizontal	Pass
5	11674.750	50.08	0.63	74.0	-23.92	Peak	84.00	150	Horizontal	Pass
5**	11674.750	39.89	0.63	54.0	-14.11	AV	84.00	150	Horizontal	Pass
6	15724.125	54.33	1.37	74.0	-19.67	Peak	49.00	150	Horizontal	Pass
6**	15724.125	43.18	1.37	54.0	-10.82	AV	49.00	150	Horizontal	Pass

11n20, Band I, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1608.500	40.88	-17.58	74.0	-33.12	Peak	97.00	150	Vertical	Pass
1**	1608.500	30.69	-17.58	54.0	-23.31	AV	97.00	150	Vertical	Pass
2	3651.000	52.62	-6.40	74.0	-21.38	Peak	0.00	150	Vertical	Pass
2**	3651.000	43.41	-6.40	54.0	-10.59	AV	0.00	150	Vertical	Pass
3	5178.000	103.27	-2.87	--	-171.73	Peak	275.00	150	Vertical	N/A
3**	5178.000	93.72	-2.87	--	93.72	AV	275.00	150	Vertical	N/A
4	7324.875	48.28	-3.14	74.0	-25.72	Peak	219.00	150	Vertical	Pass
4**	7324.875	37.65	-3.14	54.0	-16.35	AV	219.00	150	Vertical	Pass
5	12354.688	51.49	1.67	74.0	-22.51	Peak	0.00	150	Vertical	Pass
5**	12354.688	40.35	1.67	54.0	-13.65	AV	0.00	150	Vertical	Pass
6	16127.062	54.60	1.69	74.0	-19.40	Peak	70.00	150	Vertical	Pass
6**	16127.062	43.74	1.69	54.0	-10.26	AV	70.00	150	Vertical	Pass

11n20, Band I, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1464.500	40.77	-17.17	74.0	-33.23	Peak	284.00	150	Horizontal	Pass
1**	1464.500	29.99	-17.17	54.0	-24.01	AV	284.00	150	Horizontal	Pass
2	2785.500	49.70	-10.11	74.0	-24.30	Peak	347.00	150	Horizontal	Pass
2**	2785.500	38.79	-10.11	54.0	-15.21	AV	347.00	150	Horizontal	Pass
3	3681.000	52.43	-6.57	74.0	-21.57	Peak	360.00	150	Horizontal	Pass
3**	3681.000	42.75	-6.57	54.0	-11.25	AV	360.00	150	Horizontal	Pass
4	5176.000	110.81	-2.96	--	-52.19	Peak	163.00	150	Horizontal	N/A
4**	5176.000	101.90	-2.96	--	101.90	AV	163.00	150	Horizontal	N/A
5	8187.375	47.86	-1.86	74.0	-26.14	Peak	116.00	150	Horizontal	Pass
5**	8187.375	38.08	-1.86	54.0	-15.92	AV	116.00	150	Horizontal	Pass
6	12068.625	50.91	1.12	74.0	-23.09	Peak	346.00	150	Horizontal	Pass
6**	12068.625	40.22	1.12	54.0	-13.78	AV	346.00	150	Horizontal	Pass

11n20, Band I, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1550.500	41.13	-17.30	74.0	-32.87	Peak	0.00	150	Vertical	Pass
1**	1550.500	30.81	-17.30	54.0	-23.19	AV	0.00	150	Vertical	Pass
2	2796.500	49.27	-10.23	74.0	-24.73	Peak	210.00	150	Vertical	Pass
2**	2796.500	38.73	-10.23	54.0	-15.27	AV	210.00	150	Vertical	Pass
3	3702.000	53.12	-5.93	74.0	-20.88	Peak	84.00	150	Vertical	Pass
3**	3702.000	43.08	-5.93	54.0	-10.92	AV	84.00	150	Vertical	Pass
4	5219.000	104.96	-2.89	--	-10.04	Peak	115.00	150	Vertical	N/A
4**	5219.000	95.07	-2.89	--	95.07	AV	115.00	150	Vertical	N/A
5	8338.313	48.88	-1.42	74.0	-25.12	Peak	82.00	150	Vertical	Pass
5**	8338.313	37.41	-1.42	54.0	-16.59	AV	82.00	150	Vertical	Pass
6	16032.562	54.37	1.58	74.0	-19.63	Peak	37.00	150	Vertical	Pass
6**	16032.562	43.51	1.58	54.0	-10.49	AV	37.00	150	Vertical	Pass

11n20, Band I, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1447.000	41.33	-17.04	74.0	-32.67	Peak	171.00	150	Horizontal	Pass
1**	1447.000	30.61	-17.04	54.0	-23.39	AV	171.00	150	Horizontal	Pass
2	2803.000	49.40	-10.04	74.0	-24.60	Peak	199.00	150	Horizontal	Pass
2**	2803.000	38.67	-10.04	54.0	-15.33	AV	199.00	150	Horizontal	Pass
3	3702.000	52.72	-5.93	74.0	-21.28	Peak	249.00	150	Horizontal	Pass
3**	3702.000	42.75	-5.93	54.0	-11.25	AV	249.00	150	Horizontal	Pass
4	5219.000	111.64	-2.89	--	-24.36	Peak	136.00	150	Horizontal	N/A
4**	5219.000	102.61	-2.89	--	102.61	AV	136.00	150	Horizontal	N/A
5	9341.688	49.01	-1.19	74.0	-24.99	Peak	202.00	150	Horizontal	Pass
5**	9341.688	38.32	-1.19	54.0	-15.68	AV	202.00	150	Horizontal	Pass
6	15567.938	54.26	2.60	74.0	-19.74	Peak	258.00	150	Horizontal	Pass
6**	15567.938	44.20	2.60	54.0	-9.80	AV	258.00	150	Horizontal	Pass

11n20, Band I, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1511.500	40.68	-17.34	74.0	-33.32	Peak	170.00	150	Vertical	Pass
1**	1511.500	30.20	-17.34	54.0	-23.80	AV	170.00	150	Vertical	Pass
2	3683.000	54.08	-6.52	74.0	-19.92	Peak	243.00	150	Vertical	Pass
2**	3683.000	42.39	-6.52	54.0	-11.61	AV	243.00	150	Vertical	Pass
3	4841.000	54.34	-2.90	74.0	-19.66	Peak	5.00	150	Vertical	Pass
3**	4841.000	43.84	-2.90	54.0	-10.16	AV	5.00	150	Vertical	Pass
4	5239.000	105.32	-2.86	--	-14.68	Peak	120.00	150	Vertical	N/A
4**	5239.000	95.36	-2.86	--	95.36	AV	120.00	150	Vertical	N/A
5	8467.687	49.02	-1.09	74.0	-24.98	Peak	260.00	150	Vertical	Pass
5**	8467.687	38.58	-1.09	54.0	-15.42	AV	260.00	150	Vertical	Pass
6	15663.750	53.53	1.76	74.0	-20.47	Peak	0.00	150	Vertical	Pass
6**	15663.750	42.83	1.76	54.0	-11.17	AV	0.00	150	Vertical	Pass

11n20, Band I, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.500	40.85	-17.04	74.0	-33.15	Peak	294.00	150	Horizontal	Pass
1**	1328.500	30.47	-17.04	54.0	-23.53	AV	294.00	150	Horizontal	Pass
2	3691.000	52.91	-6.08	74.0	-21.09	Peak	0.00	150	Horizontal	Pass
2**	3691.000	42.80	-6.08	54.0	-11.20	AV	0.00	150	Horizontal	Pass
3	4773.000	54.69	-2.77	74.0	-19.31	Peak	68.00	150	Horizontal	Pass
3**	4773.000	43.75	-2.77	54.0	-10.25	AV	68.00	150	Horizontal	Pass
4	5241.000	111.09	-2.90	--	-72.91	Peak	184.00	150	Horizontal	N/A
4**	5241.000	102.82	-2.90	--	102.82	AV	184.00	150	Horizontal	N/A
5	9163.437	50.06	-1.10	74.0	-23.94	Peak	161.00	150	Horizontal	Pass
5**	9163.437	38.05	-1.10	54.0	-15.95	AV	161.00	150	Horizontal	Pass
6	15619.125	53.47	2.58	74.0	-20.53	Peak	128.00	150	Horizontal	Pass
6**	15619.125	43.33	2.58	54.0	-10.67	AV	128.00	150	Horizontal	Pass

11n40, Band I, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1572.000	39.84	-16.98	74.0	-34.16	Peak	125.00	150	Vertical	Pass
1**	1572.000	24.54	-16.98	54.0	-29.46	AV	125.00	150	Vertical	Pass
2	2250.500	45.99	-12.35	74.0	-28.01	Peak	6.00	150	Vertical	Pass
2**	2250.500	29.44	-12.35	54.0	-24.56	AV	6.00	150	Vertical	Pass
3	3649.000	52.53	-6.36	74.0	-21.47	Peak	155.00	150	Vertical	Pass
3**	3649.000	36.34	-6.36	54.0	-17.66	AV	155.00	150	Vertical	Pass
4	5194.000	102.26	-2.93	--	21.26	Peak	81.00	150	Vertical	N/A
4**	5194.000	93.55	-2.93	--	93.55	AV	81.00	150	Vertical	N/A
5	11904.750	50.46	2.05	74.0	-23.54	Peak	360.00	150	Vertical	Pass
5**	11904.750	39.53	2.05	54.0	-14.47	AV	360.00	150	Vertical	Pass
6	15525.937	53.38	2.39	74.0	-20.62	Peak	45.00	150	Vertical	Pass
6**	15525.937	42.86	2.39	54.0	-11.14	AV	45.00	150	Vertical	Pass

11n40, Band I, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1539.000	40.10	-17.33	74.0	-33.90	Peak	200.00	150	Horizontal	Pass
1**	1539.000	24.06	-17.33	54.0	-29.94	AV	200.00	150	Horizontal	Pass
2	2786.000	47.72	-10.16	74.0	-26.28	Peak	20.00	150	Horizontal	Pass
2**	2786.000	32.54	-10.16	54.0	-21.46	AV	20.00	150	Horizontal	Pass
3	4028.000	51.46	-5.14	74.0	-22.54	Peak	146.00	150	Horizontal	Pass
3**	4028.000	35.70	-5.14	54.0	-18.30	AV	146.00	150	Horizontal	Pass
4	5187.000	108.52	-2.77	--	-66.48	Peak	175.00	150	Horizontal	N/A
4**	5187.000	100.83	-2.77	--	100.83	AV	175.00	150	Horizontal	N/A
5	11313.937	50.21	0.81	74.0	-23.79	Peak	357.00	150	Horizontal	Pass
5**	11313.937	39.06	0.81	54.0	-14.94	AV	357.00	150	Horizontal	Pass
6	15583.688	54.45	2.37	74.0	-19.55	Peak	10.00	150	Horizontal	Pass
6**	15583.688	42.70	2.37	54.0	-11.30	AV	10.00	150	Horizontal	Pass

11n40, Band I, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1530.500	39.70	-17.24	74.0	-34.30	Peak	20.00	150	Vertical	Pass
1**	1530.500	23.71	-17.24	54.0	-30.29	AV	20.00	150	Vertical	Pass
2	2770.500	48.06	-10.26	74.0	-25.94	Peak	87.00	150	Vertical	Pass
2**	2770.500	32.40	-10.26	54.0	-21.60	AV	87.00	150	Vertical	Pass
3	3647.000	52.78	-6.23	74.0	-21.22	Peak	139.00	150	Vertical	Pass
3**	3647.000	36.54	-6.23	54.0	-17.46	AV	139.00	150	Vertical	Pass
4	5234.000	100.39	-2.70	--	-26.61	Peak	127.00	150	Vertical	N/A
4**	5234.000	92.24	-2.70	--	92.24	AV	127.00	150	Vertical	N/A
5	11496.500	50.23	0.29	74.0	-23.77	Peak	350.00	150	Vertical	Pass
5**	11496.500	39.72	0.29	54.0	-14.28	AV	350.00	150	Vertical	Pass
6	15813.375	52.77	2.58	74.0	-21.23	Peak	0.00	150	Vertical	Pass
6**	15813.375	41.93	2.58	54.0	-12.07	AV	0.00	150	Vertical	Pass

11n40, Band I, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1383.000	39.52	-17.17	74.0	-34.48	Peak	95.00	150	Horizontal	Pass
1**	1383.000	23.71	-17.17	54.0	-30.29	AV	95.00	150	Horizontal	Pass
2	2798.000	48.12	-10.06	74.0	-25.88	Peak	174.00	150	Horizontal	Pass
2**	2798.000	31.86	-10.06	54.0	-22.14	AV	174.00	150	Horizontal	Pass
3	4056.000	51.69	-5.36	74.0	-22.31	Peak	149.00	150	Horizontal	Pass
3**	4056.000	35.17	-5.36	54.0	-18.83	AV	149.00	150	Horizontal	Pass
4	5225.000	107.94	-3.06	--	-53.06	Peak	161.00	150	Horizontal	N/A
4**	5225.000	99.60	-3.06	--	99.60	AV	161.00	150	Horizontal	N/A
5	7549.125	48.56	-2.06	74.0	-25.44	Peak	83.00	150	Horizontal	Pass
5**	7549.125	37.03	-2.06	54.0	-16.97	AV	83.00	150	Horizontal	Pass
6	11495.063	50.77	0.30	74.0	-23.23	Peak	333.00	150	Horizontal	Pass
6**	11495.063	39.34	0.30	54.0	-14.66	AV	333.00	150	Horizontal	Pass

11ac20, Band I, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1359.500	40.46	-17.07	74.0	-33.54	Peak	56.00	150	Vertical	Pass
1**	1359.500	23.73	-17.07	54.0	-30.27	AV	56.00	150	Vertical	Pass
2	2776.500	48.29	-10.19	74.0	-25.71	Peak	0.00	150	Vertical	Pass
2**	2776.500	31.89	-10.19	54.0	-22.11	AV	0.00	150	Vertical	Pass
3	4033.000	53.26	-5.04	74.0	-20.74	Peak	197.00	150	Vertical	Pass
3**	4033.000	35.31	-5.04	54.0	-18.69	AV	197.00	150	Vertical	Pass
4	5179.000	104.04	-2.79	--	22.04	Peak	82.00	150	Vertical	N/A
4**	5179.000	95.79	-2.79	--	95.79	AV	82.00	150	Vertical	N/A
5	7605.188	47.89	-3.12	74.0	-26.11	Peak	126.00	150	Vertical	Pass
5**	7605.188	36.55	-3.12	54.0	-17.45	AV	126.00	150	Vertical	Pass
6	12305.812	50.87	1.72	74.0	-23.13	Peak	212.00	150	Vertical	Pass
6**	12305.812	39.39	1.72	54.0	-14.61	AV	212.00	150	Vertical	Pass

11ac20, Band I, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.500	39.93	-17.42	74.0	-34.07	Peak	1.00	150	Horizontal	Pass
1**	1497.500	23.33	-17.42	54.0	-30.67	AV	1.00	150	Horizontal	Pass
2	2225.500	46.00	-12.48	74.0	-28.00	Peak	67.00	150	Horizontal	Pass
2**	2225.500	29.38	-12.48	54.0	-24.62	AV	67.00	150	Horizontal	Pass
3	3671.000	52.06	-6.95	74.0	-21.94	Peak	246.00	150	Horizontal	Pass
3**	3671.000	35.71	-6.95	54.0	-18.29	AV	246.00	150	Horizontal	Pass
4	5178.000	111.61	-2.87	--	-29.39	Peak	141.00	150	Horizontal	N/A
4**	5178.000	103.23	-2.87	--	103.23	AV	141.00	150	Horizontal	N/A
5	11469.187	50.42	0.13	74.0	-23.58	Peak	40.00	150	Horizontal	Pass
5**	11469.187	39.14	0.13	54.0	-14.86	AV	40.00	150	Horizontal	Pass
6	15579.750	54.08	2.57	74.0	-19.92	Peak	177.00	150	Horizontal	Pass
6**	15579.750	42.96	2.57	54.0	-11.04	AV	177.00	150	Horizontal	Pass

11ac20, Band I, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1548.000	39.71	-17.32	74.0	-34.29	Peak	29.00	150	Vertical	Pass
1**	1548.000	23.30	-17.32	54.0	-30.70	AV	29.00	150	Vertical	Pass
2	2797.500	48.78	-10.12	74.0	-25.22	Peak	274.00	150	Vertical	Pass
2**	2797.500	32.32	-10.12	54.0	-21.68	AV	274.00	150	Vertical	Pass
3	3698.000	51.54	-6.01	74.0	-22.46	Peak	116.00	150	Vertical	Pass
3**	3698.000	36.42	-6.01	54.0	-17.58	AV	116.00	150	Vertical	Pass
4	5221.000	103.49	-2.84	--	-12.51	Peak	116.00	150	Vertical	N/A
4**	5221.000	95.13	-2.84	--	95.13	AV	116.00	150	Vertical	N/A
5	11610.063	50.28	0.35	74.0	-23.72	Peak	182.00	150	Vertical	Pass
5**	11610.063	39.58	0.35	54.0	-14.42	AV	182.00	150	Vertical	Pass
6	15683.438	54.68	1.98	74.0	-19.32	Peak	278.00	150	Vertical	Pass
6**	15683.438	42.76	1.98	54.0	-11.24	AV	278.00	150	Vertical	Pass

11ac20, Band I, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1345.000	40.39	-17.39	74.0	-33.61	Peak	294.00	150	Horizontal	Pass
1**	1345.000	23.14	-17.39	54.0	-30.86	AV	294.00	150	Horizontal	Pass
2	2783.000	47.70	-9.99	74.0	-26.30	Peak	206.00	150	Horizontal	Pass
2**	2783.000	32.27	-9.99	54.0	-21.73	AV	206.00	150	Horizontal	Pass
3	3805.000	52.63	-5.90	74.0	-21.37	Peak	260.00	150	Horizontal	Pass
3**	3805.000	35.16	-5.90	54.0	-18.84	AV	260.00	150	Horizontal	Pass
4	5219.000	113.24	-2.89	--	-30.76	Peak	144.00	150	Horizontal	N/A
4**	5219.000	103.66	-2.89	--	103.66	AV	144.00	150	Horizontal	N/A
5	11285.188	50.37	0.61	74.0	-23.63	Peak	250.00	150	Horizontal	Pass
5**	11285.188	39.56	0.61	54.0	-14.44	AV	250.00	150	Horizontal	Pass
6	15515.437	53.81	2.41	74.0	-20.19	Peak	144.00	150	Horizontal	Pass
6**	15515.437	43.39	2.41	54.0	-10.61	AV	144.00	150	Horizontal	Pass

11ac20, Band I, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1567.000	40.01	-17.13	74.0	-33.99	Peak	199.00	150	Vertical	Pass
1**	1567.000	23.44	-17.13	54.0	-30.56	AV	199.00	150	Vertical	Pass
2	2781.500	46.96	-10.05	74.0	-27.04	Peak	62.00	150	Vertical	Pass
2**	2781.500	32.68	-10.05	54.0	-21.32	AV	62.00	150	Vertical	Pass
3	3654.000	51.71	-6.36	74.0	-22.29	Peak	204.00	150	Vertical	Pass
3**	3654.000	36.55	-6.36	54.0	-17.45	AV	204.00	150	Vertical	Pass
4	5238.000	102.87	-2.87	--	22.87	Peak	80.00	150	Vertical	N/A
4**	5238.000	94.81	-2.87	--	94.81	AV	80.00	150	Vertical	N/A
5	12037.000	51.09	1.16	74.0	-22.91	Peak	178.00	150	Vertical	Pass
5**	12037.000	39.30	1.16	54.0	-14.70	AV	178.00	150	Vertical	Pass
6	15998.437	54.87	1.34	74.0	-19.13	Peak	183.00	150	Vertical	Pass
6**	15998.437	43.18	1.34	54.0	-10.82	AV	183.00	150	Vertical	Pass

11ac20, Band I, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1566.500	40.71	-17.17	74.0	-33.29	Peak	198.00	150	Horizontal	Pass
1**	1566.500	23.88	-17.17	54.0	-30.12	AV	198.00	150	Horizontal	Pass
2	2801.000	48.21	-10.24	74.0	-25.79	Peak	208.00	150	Horizontal	Pass
2**	2801.000	32.19	-10.24	54.0	-21.81	AV	208.00	150	Horizontal	Pass
3	3700.000	52.26	-5.97	74.0	-21.74	Peak	360.00	150	Horizontal	Pass
3**	3700.000	36.06	-5.97	54.0	-17.94	AV	360.00	150	Horizontal	Pass
4	5239.000	112.58	-2.86	--	-55.42	Peak	168.00	150	Horizontal	N/A
4**	5239.000	103.23	-2.86	--	103.23	AV	168.00	150	Horizontal	N/A
5	7559.187	48.28	-1.83	74.0	-25.72	Peak	168.00	150	Horizontal	Pass
5**	7559.187	37.73	-1.83	54.0	-16.27	AV	168.00	150	Horizontal	Pass
6	11713.563	50.46	1.18	74.0	-23.54	Peak	253.00	150	Horizontal	Pass
6**	11713.563	39.50	1.18	54.0	-14.50	AV	253.00	150	Horizontal	Pass

11ac40, Band I, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1518.000	40.18	-17.29	74.0	-33.82	Peak	282.00	150	Vertical	Pass
1**	1518.000	23.48	-17.29	54.0	-30.52	AV	282.00	150	Vertical	Pass
2	2772.500	48.46	-10.36	74.0	-25.54	Peak	21.00	150	Vertical	Pass
2**	2772.500	32.11	-10.36	54.0	-21.89	AV	21.00	150	Vertical	Pass
3	4104.000	51.47	-5.93	74.0	-22.53	Peak	263.00	150	Vertical	Pass
3**	4104.000	34.33	-5.93	54.0	-19.67	AV	263.00	150	Vertical	Pass
4	5195.000	101.03	-2.86	--	20.03	Peak	81.00	150	Vertical	N/A
4**	5195.000	92.96	-2.86	--	92.96	AV	81.00	150	Vertical	N/A
5	11713.563	50.64	1.18	74.0	-23.36	Peak	118.00	150	Vertical	Pass
5**	11713.563	39.10	1.18	54.0	-14.90	AV	118.00	150	Vertical	Pass
6	15835.688	54.34	1.99	74.0	-19.66	Peak	73.00	150	Vertical	Pass
6**	15835.688	42.07	1.99	54.0	-11.93	AV	73.00	150	Vertical	Pass

11ac40, Band I, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1461.500	40.46	-17.29	74.0	-33.54	Peak	124.00	150	Horizontal	Pass
1**	1461.500	23.54	-17.29	54.0	-30.46	AV	124.00	150	Horizontal	Pass
2	2796.000	47.38	-10.24	74.0	-26.62	Peak	161.00	150	Horizontal	Pass
2**	2796.000	32.02	-10.24	54.0	-21.98	AV	161.00	150	Horizontal	Pass
3	3652.000	52.13	-6.35	74.0	-21.87	Peak	259.00	150	Horizontal	Pass
3**	3652.000	36.25	-6.35	54.0	-17.75	AV	259.00	150	Horizontal	Pass
4	5185.000	108.62	-2.77	--	-22.38	Peak	131.00	150	Horizontal	N/A
4**	5185.000	100.14	-2.77	--	100.14	AV	131.00	150	Horizontal	N/A
5	10894.188	50.17	0.45	74.0	-23.83	Peak	360.00	150	Horizontal	Pass
5**	10894.188	39.56	0.45	54.0	-14.44	AV	360.00	150	Horizontal	Pass
6	15564.000	54.24	2.53	74.0	-19.76	Peak	292.00	150	Horizontal	Pass
6**	15564.000	43.00	2.53	54.0	-11.00	AV	292.00	150	Horizontal	Pass

11ac40, Band I, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1467.000	39.89	-17.23	74.0	-34.11	Peak	212.00	150	Vertical	Pass
1**	1467.000	23.26	-17.23	54.0	-30.74	AV	212.00	150	Vertical	Pass
2	2795.000	48.15	-10.25	74.0	-25.85	Peak	112.00	150	Vertical	Pass
2**	2795.000	31.85	-10.25	54.0	-22.15	AV	112.00	150	Vertical	Pass
3	3664.000	51.96	-6.91	74.0	-22.04	Peak	335.00	150	Vertical	Pass
3**	3664.000	36.14	-6.91	54.0	-17.86	AV	335.00	150	Vertical	Pass
4	5234.000	99.91	-2.70	--	-0.09	Peak	100.00	150	Vertical	N/A
4**	5234.000	92.46	-2.70	--	92.46	AV	100.00	150	Vertical	N/A
5	11269.375	50.96	0.32	74.0	-23.04	Peak	360.00	150	Vertical	Pass
5**	11269.375	39.36	0.32	54.0	-14.64	AV	360.00	150	Vertical	Pass
6	15852.750	54.30	1.79	74.0	-19.70	Peak	170.00	150	Vertical	Pass
6**	15852.750	42.90	1.79	54.0	-11.10	AV	170.00	150	Vertical	Pass

11ac40, Band I, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1539.500	40.87	-17.38	74.0	-33.13	Peak	329.00	150	Horizontal	Pass
1**	1539.500	23.19	-17.38	54.0	-30.81	AV	329.00	150	Horizontal	Pass
2	2807.000	48.42	-10.08	74.0	-25.58	Peak	26.00	150	Horizontal	Pass
2**	2807.000	32.09	-10.08	54.0	-21.91	AV	26.00	150	Horizontal	Pass
3	3653.000	53.07	-6.31	74.0	-20.93	Peak	280.00	150	Horizontal	Pass
3**	3653.000	36.77	-6.31	54.0	-17.23	AV	280.00	150	Horizontal	Pass
4	5227.000	109.10	-3.06	--	-26.90	Peak	136.00	150	Horizontal	N/A
4**	5227.000	100.39	-3.06	--	100.39	AV	136.00	150	Horizontal	N/A
5	11499.375	50.16	0.29	74.0	-23.84	Peak	189.00	150	Horizontal	Pass
5**	11499.375	39.90	0.29	54.0	-14.10	AV	189.00	150	Horizontal	Pass
6	15854.063	55.10	1.75	74.0	-18.90	Peak	204.00	150	Horizontal	Pass
6**	15854.063	42.96	1.75	54.0	-11.04	AV	204.00	150	Horizontal	Pass

11ac80, Band I, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1550.000	39.54	-17.35	74.0	-34.46	Peak	169.00	150	Vertical	Pass
1**	1550.000	23.56	-17.35	54.0	-30.44	AV	169.00	150	Vertical	Pass
2	2768.500	48.60	-10.25	74.0	-25.40	Peak	322.00	150	Vertical	Pass
2**	2768.500	31.86	-10.25	54.0	-22.14	AV	322.00	150	Vertical	Pass
3	3689.000	53.01	-6.28	74.0	-20.99	Peak	0.00	150	Vertical	Pass
3**	3689.000	36.03	-6.28	54.0	-17.97	AV	0.00	150	Vertical	Pass
4	5204.000	97.50	-3.24	--	14.50	Peak	83.00	150	Vertical	N/A
4**	5204.000	89.36	-3.24	--	89.36	AV	83.00	150	Vertical	N/A
5	11936.375	50.60	1.81	74.0	-23.40	Peak	56.00	150	Vertical	Pass
5**	11936.375	39.83	1.81	54.0	-14.17	AV	56.00	150	Vertical	Pass
6	15582.375	53.44	2.44	74.0	-20.56	Peak	118.00	150	Vertical	Pass
6**	15582.375	42.65	2.44	54.0	-11.35	AV	118.00	150	Vertical	Pass

11ac80, Band I, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1570.500	40.03	-17.07	74.0	-33.97	Peak	158.00	150	Horizontal	Pass
1**	1570.500	24.42	-17.07	54.0	-29.58	AV	158.00	150	Horizontal	Pass
2	2815.500	47.82	-10.02	74.0	-26.18	Peak	173.00	150	Horizontal	Pass
2**	2815.500	32.62	-10.02	54.0	-21.38	AV	173.00	150	Horizontal	Pass
3	3810.000	52.54	-5.85	74.0	-21.46	Peak	359.00	150	Horizontal	Pass
3**	3810.000	35.20	-5.85	54.0	-18.80	AV	359.00	150	Horizontal	Pass
4	5191.000	105.32	-2.79	--	-28.68	Peak	134.00	150	Horizontal	N/A
4**	5191.000	96.45	-2.79	--	96.45	AV	134.00	150	Horizontal	N/A
5	10743.250	50.46	-0.28	74.0	-23.54	Peak	173.00	150	Horizontal	Pass
5**	10743.250	38.68	-0.28	54.0	-15.32	AV	173.00	150	Horizontal	Pass
6	15877.687	54.25	1.14	74.0	-19.75	Peak	272.00	150	Horizontal	Pass
6**	15877.687	42.52	1.14	54.0	-11.48	AV	272.00	150	Horizontal	Pass

11a, Band II, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1561.500	39.92	-17.23	74.0	-34.08	Peak	360.00	150	Vertical	Pass
1**	1561.500	23.65	-17.23	54.0	-30.35	AV	360.00	150	Vertical	Pass
2	2806.500	47.77	-10.15	74.0	-26.23	Peak	154.00	150	Vertical	Pass
2**	2806.500	32.00	-10.15	54.0	-22.00	AV	154.00	150	Vertical	Pass
3	3680.000	52.19	-6.70	74.0	-21.81	Peak	159.00	150	Vertical	Pass
3**	3680.000	36.05	-6.70	54.0	-17.95	AV	159.00	150	Vertical	Pass
4	5259.000	103.47	-3.06	--	23.47	Peak	80.00	150	Vertical	N/A
4**	5259.000	95.72	-3.06	--	95.72	AV	80.00	150	Vertical	N/A
5	11910.500	52.33	1.87	74.0	-21.67	Peak	210.00	150	Vertical	Pass
5**	11910.500	39.59	1.87	54.0	-14.41	AV	210.00	150	Vertical	Pass
6	15627.000	54.05	2.50	74.0	-19.95	Peak	4.00	150	Vertical	Pass
6**	15627.000	42.54	2.50	54.0	-11.46	AV	4.00	150	Vertical	Pass

11a, Band II, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1320.000	39.62	-17.04	74.0	-34.38	Peak	317.00	150	Horizontal	Pass
1**	1320.000	23.61	-17.04	54.0	-30.39	AV	317.00	150	Horizontal	Pass
2	2831.000	47.40	-10.09	74.0	-26.60	Peak	352.00	150	Horizontal	Pass
2**	2831.000	31.54	-10.09	54.0	-22.46	AV	352.00	150	Horizontal	Pass
3	4135.000	51.34	-4.89	74.0	-22.66	Peak	317.00	150	Horizontal	Pass
3**	4135.000	35.73	-4.89	54.0	-18.27	AV	317.00	150	Horizontal	Pass
4	5259.000	109.96	-3.06	--	-77.04	Peak	187.00	150	Horizontal	N/A
4**	5259.000	102.66	-3.06	--	102.66	AV	187.00	150	Horizontal	N/A
5	8302.375	48.79	-0.78	74.0	-25.21	Peak	282.00	150	Horizontal	Pass
5**	8302.375	37.98	-0.78	54.0	-16.02	AV	282.00	150	Horizontal	Pass
6	15585.000	53.63	2.30	74.0	-20.37	Peak	224.00	150	Horizontal	Pass
6**	15585.000	42.53	2.30	54.0	-11.47	AV	224.00	150	Horizontal	Pass

11a, Band II, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1325.500	39.80	-17.15	74.0	-34.20	Peak	4.00	150	Vertical	Pass
1**	1325.500	23.90	-17.15	54.0	-30.10	AV	4.00	150	Vertical	Pass
2	2770.500	47.98	-10.26	74.0	-26.02	Peak	332.00	150	Vertical	Pass
2**	2770.500	32.21	-10.26	54.0	-21.79	AV	332.00	150	Vertical	Pass
3	3631.000	51.87	-7.29	74.0	-22.13	Peak	28.00	150	Vertical	Pass
3**	3631.000	35.85	-7.29	54.0	-18.15	AV	28.00	150	Vertical	Pass
4	5297.000	102.01	-3.08	--	19.01	Peak	83.00	150	Vertical	N/A
4**	5297.000	94.02	-3.08	--	94.02	AV	83.00	150	Vertical	N/A
5	11993.875	51.12	1.40	74.0	-22.88	Peak	57.00	150	Vertical	Pass
5**	11993.875	39.78	1.40	54.0	-14.22	AV	57.00	150	Vertical	Pass
6	15520.687	54.24	2.52	74.0	-19.76	Peak	256.00	150	Vertical	Pass
6**	15520.687	43.02	2.52	54.0	-10.98	AV	256.00	150	Vertical	Pass

11a, Band II, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1340.500	40.03	-17.08	74.0	-33.97	Peak	0.00	150	Horizontal	Pass
1**	1340.500	23.81	-17.08	54.0	-30.19	AV	0.00	150	Horizontal	Pass
2	2775.500	48.26	-10.44	74.0	-25.74	Peak	82.00	150	Horizontal	Pass
2**	2775.500	31.84	-10.44	54.0	-22.16	AV	82.00	150	Horizontal	Pass
3	3826.000	51.40	-5.39	74.0	-22.60	Peak	254.00	150	Horizontal	Pass
3**	3826.000	35.43	-5.39	54.0	-18.57	AV	254.00	150	Horizontal	Pass
4	5299.000	109.71	-3.10	--	-74.29	Peak	184.00	150	Horizontal	N/A
4**	5299.000	102.75	-3.10	--	102.75	AV	184.00	150	Horizontal	N/A
5	12048.500	51.27	1.36	74.0	-22.73	Peak	333.00	150	Horizontal	Pass
5**	12048.500	39.45	1.36	54.0	-14.55	AV	333.00	150	Horizontal	Pass
6	15512.813	54.52	2.34	74.0	-19.48	Peak	134.00	150	Horizontal	Pass
6**	15512.813	43.55	2.34	54.0	-10.45	AV	134.00	150	Horizontal	Pass

11a, Band II, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.500	39.81	-17.39	74.0	-34.19	Peak	165.00	150	Vertical	Pass
1**	1352.500	23.22	-17.39	54.0	-30.78	AV	165.00	150	Vertical	Pass
2	2784.000	47.82	-9.98	74.0	-26.18	Peak	360.00	150	Vertical	Pass
2**	2784.000	32.24	-9.98	54.0	-21.76	AV	360.00	150	Vertical	Pass
3	3698.000	52.60	-6.01	74.0	-21.40	Peak	42.00	150	Vertical	Pass
3**	3698.000	36.25	-6.01	54.0	-17.75	AV	42.00	150	Vertical	Pass
4	5323.000	102.18	-3.15	--	21.18	Peak	81.00	150	Vertical	N/A
4**	5323.000	94.84	-3.15	--	94.84	AV	81.00	150	Vertical	N/A
5	7553.438	48.21	-1.79	74.0	-25.79	Peak	264.00	150	Vertical	Pass
5**	7553.438	37.47	-1.79	54.0	-16.53	AV	264.00	150	Vertical	Pass
6	12216.688	50.74	1.60	74.0	-23.26	Peak	198.00	150	Vertical	Pass
6**	12216.688	39.44	1.60	54.0	-14.56	AV	198.00	150	Vertical	Pass

11a, Band II, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1448.000	39.57	-16.99	74.0	-34.43	Peak	220.00	150	Horizontal	Pass
1**	1448.000	23.17	-16.99	54.0	-30.83	AV	220.00	150	Horizontal	Pass
2	2775.000	47.77	-10.45	74.0	-26.23	Peak	359.00	150	Horizontal	Pass
2**	2775.000	32.06	-10.45	54.0	-21.94	AV	359.00	150	Horizontal	Pass
3	3711.000	51.93	-6.28	74.0	-22.07	Peak	164.00	150	Horizontal	Pass
3**	3711.000	35.88	-6.28	54.0	-18.12	AV	164.00	150	Horizontal	Pass
4	5319.000	109.19	-3.12	--	-74.81	Peak	184.00	150	Horizontal	N/A
4**	5319.000	101.73	-3.12	--	101.73	AV	184.00	150	Horizontal	N/A
5	11733.687	50.79	1.26	74.0	-23.21	Peak	0.00	150	Horizontal	Pass
5**	11733.687	39.36	1.26	54.0	-14.64	AV	0.00	150	Horizontal	Pass
6	15498.375	55.05	1.67	74.0	-18.95	Peak	0.00	150	Horizontal	Pass
6**	15498.375	42.17	1.67	54.0	-11.83	AV	0.00	150	Horizontal	Pass

11n20, Band II, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.500	40.09	-17.36	74.0	-33.91	Peak	359.00	150	Vertical	Pass
1**	1373.500	23.35	-17.36	54.0	-30.65	AV	359.00	150	Vertical	Pass
2	2788.000	47.62	-9.94	74.0	-26.38	Peak	269.00	150	Vertical	Pass
2**	2788.000	32.43	-9.94	54.0	-21.57	AV	269.00	150	Vertical	Pass
3	3651.000	52.36	-6.40	74.0	-21.64	Peak	203.00	150	Vertical	Pass
3**	3651.000	36.62	-6.40	54.0	-17.38	AV	203.00	150	Vertical	Pass
4	5259.000	103.16	-3.06	--	-7.84	Peak	111.00	150	Vertical	N/A
4**	5259.000	95.20	-3.06	--	95.20	AV	111.00	150	Vertical	N/A
5	11986.688	51.09	1.26	74.0	-22.91	Peak	335.00	150	Vertical	Pass
5**	11986.688	39.83	1.26	54.0	-14.17	AV	335.00	150	Vertical	Pass
6	16053.562	54.24	1.73	74.0	-19.76	Peak	130.00	150	Vertical	Pass
6**	16053.562	43.64	1.73	54.0	-10.36	AV	130.00	150	Vertical	Pass

11n20, Band II, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1565.500	40.45	-17.27	74.0	-33.55	Peak	107.00	150	Horizontal	Pass
1**	1565.500	23.47	-17.27	54.0	-30.53	AV	107.00	150	Horizontal	Pass
2	2796.000	48.13	-10.24	74.0	-25.87	Peak	207.00	150	Horizontal	Pass
2**	2796.000	32.07	-10.24	54.0	-21.93	AV	207.00	150	Horizontal	Pass
3	3746.000	52.97	-6.97	74.0	-21.03	Peak	12.00	150	Horizontal	Pass
3**	3746.000	35.49	-6.97	54.0	-18.51	AV	12.00	150	Horizontal	Pass
4	5261.000	111.57	-3.14	--	-23.43	Peak	135.00	150	Horizontal	N/A
4**	5261.000	102.12	-3.14	--	102.12	AV	135.00	150	Horizontal	N/A
5	11265.063	50.66	0.19	74.0	-23.34	Peak	1.00	150	Horizontal	Pass
5**	11265.063	39.10	0.19	54.0	-14.90	AV	1.00	150	Horizontal	Pass
6	15546.937	54.21	1.68	74.0	-19.79	Peak	245.00	150	Horizontal	Pass
6**	15546.937	42.07	1.68	54.0	-11.93	AV	245.00	150	Horizontal	Pass

11n20, Band II, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1569.000	40.42	-17.01	74.0	-33.58	Peak	202.00	150	Vertical	Pass
1**	1569.000	24.14	-17.01	54.0	-29.86	AV	202.00	150	Vertical	Pass
2	2777.000	48.19	-10.07	74.0	-25.81	Peak	360.00	150	Vertical	Pass
2**	2777.000	32.26	-10.07	54.0	-21.74	AV	360.00	150	Vertical	Pass
3	3674.000	52.37	-7.04	74.0	-21.63	Peak	238.00	150	Vertical	Pass
3**	3674.000	35.51	-7.04	54.0	-18.49	AV	238.00	150	Vertical	Pass
4	5299.000	104.03	-3.10	--	-13.97	Peak	118.00	150	Vertical	N/A
4**	5299.000	94.74	-3.10	--	94.74	AV	118.00	150	Vertical	N/A
5	12321.625	51.26	1.74	74.0	-22.74	Peak	119.00	150	Vertical	Pass
5**	12321.625	39.56	1.74	54.0	-14.44	AV	119.00	150	Vertical	Pass
6	15577.125	53.88	2.59	74.0	-20.12	Peak	360.00	150	Vertical	Pass
6**	15577.125	42.69	2.59	54.0	-11.31	AV	360.00	150	Vertical	Pass

11n20, Band II, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1544.500	40.15	-17.32	74.0	-33.85	Peak	164.00	150	Horizontal	Pass
1**	1544.500	23.42	-17.32	54.0	-30.58	AV	164.00	150	Horizontal	Pass
2	2756.000	47.59	-10.62	74.0	-26.41	Peak	312.00	150	Horizontal	Pass
2**	2756.000	31.73	-10.62	54.0	-22.27	AV	312.00	150	Horizontal	Pass
3	3651.000	53.10	-6.40	74.0	-20.90	Peak	138.00	150	Horizontal	Pass
3**	3651.000	36.84	-6.40	54.0	-17.16	AV	138.00	150	Horizontal	Pass
4	5299.000	111.25	-3.10	--	-68.75	Peak	180.00	150	Horizontal	N/A
4**	5299.000	102.37	-3.10	--	102.37	AV	180.00	150	Horizontal	N/A
5	12154.875	50.85	0.93	74.0	-23.15	Peak	212.00	150	Horizontal	Pass
5**	12154.875	40.26	0.93	54.0	-13.74	AV	212.00	150	Horizontal	Pass
6	15747.750	53.90	1.89	74.0	-20.10	Peak	90.00	150	Horizontal	Pass
6**	15747.750	42.54	1.89	54.0	-11.46	AV	90.00	150	Horizontal	Pass

11n20, Band II, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1482.000	40.08	-17.29	74.0	-33.92	Peak	354.00	150	Vertical	Pass
1**	1482.000	23.49	-17.29	54.0	-30.51	AV	354.00	150	Vertical	Pass
2	2783.000	48.41	-9.99	74.0	-25.59	Peak	344.00	150	Vertical	Pass
2**	2783.000	32.91	-9.99	54.0	-21.09	AV	344.00	150	Vertical	Pass
3	3706.000	52.00	-6.13	74.0	-22.00	Peak	51.00	150	Vertical	Pass
3**	3706.000	36.20	-6.13	54.0	-17.80	AV	51.00	150	Vertical	Pass
4	5324.000	103.96	-3.08	--	17.96	Peak	86.00	150	Vertical	N/A
4**	5324.000	95.03	-3.08	--	95.03	AV	86.00	150	Vertical	N/A
5	8298.062	48.87	-0.86	74.0	-25.13	Peak	45.00	150	Vertical	Pass
5**	8298.062	38.23	-0.86	54.0	-15.77	AV	45.00	150	Vertical	Pass
6	11901.875	50.32	2.17	74.0	-23.68	Peak	345.00	150	Vertical	Pass
6**	11901.875	39.73	2.17	54.0	-14.27	AV	345.00	150	Vertical	Pass

11n20, Band II, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1187.000	39.28	-17.71	74.0	-34.72	Peak	360.00	150	Horizontal	Pass
1**	1187.000	22.49	-17.71	54.0	-31.51	AV	360.00	150	Horizontal	Pass
2	2798.000	47.73	-10.06	74.0	-26.27	Peak	73.00	150	Horizontal	Pass
2**	2798.000	32.60	-10.06	54.0	-21.40	AV	73.00	150	Horizontal	Pass
3	3652.000	51.90	-6.35	74.0	-22.10	Peak	84.00	150	Horizontal	Pass
3**	3652.000	36.95	-6.35	54.0	-17.05	AV	84.00	150	Horizontal	Pass
4	5321.000	109.40	-3.04	--	-52.60	Peak	162.00	150	Horizontal	N/A
4**	5321.000	100.83	-3.04	--	100.83	AV	162.00	150	Horizontal	N/A
5	8308.125	48.65	-0.68	74.0	-25.35	Peak	43.00	150	Horizontal	Pass
5**	8308.125	38.26	-0.68	54.0	-15.74	AV	43.00	150	Horizontal	Pass
6	12235.375	50.74	1.51	74.0	-23.26	Peak	312.00	150	Horizontal	Pass
6**	12235.375	39.87	1.51	54.0	-14.13	AV	312.00	150	Horizontal	Pass

11n40, Band II, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1357.500	39.73	-17.37	74.0	-34.27	Peak	230.00	150	Vertical	Pass
1**	1357.500	23.21	-17.37	54.0	-30.79	AV	230.00	150	Vertical	Pass
2	2796.000	48.05	-10.24	74.0	-25.95	Peak	62.00	150	Vertical	Pass
2**	2796.000	32.16	-10.24	54.0	-21.84	AV	62.00	150	Vertical	Pass
3	3700.000	52.92	-5.97	74.0	-21.08	Peak	0.00	150	Vertical	Pass
3**	3700.000	36.55	-5.97	54.0	-17.45	AV	0.00	150	Vertical	Pass
4	5273.000	98.36	-3.10	--	-84.64	Peak	183.00	150	Vertical	N/A
4**	5273.000	90.70	-3.10	--	90.70	AV	183.00	150	Vertical	N/A
5	8380.000	48.87	-1.13	74.0	-25.13	Peak	332.00	150	Vertical	Pass
5**	8380.000	37.04	-1.13	54.0	-16.96	AV	332.00	150	Vertical	Pass
6	11709.250	50.50	1.04	74.0	-23.50	Peak	74.00	150	Vertical	Pass
6**	11709.250	39.67	1.04	54.0	-14.33	AV	74.00	150	Vertical	Pass

11n40, Band II, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1493.000	39.68	-17.34	74.0	-34.32	Peak	184.00	150	Horizontal	Pass
1**	1493.000	23.03	-17.34	54.0	-30.97	AV	184.00	150	Horizontal	Pass
2	2755.000	48.38	-10.61	74.0	-25.62	Peak	2.00	150	Horizontal	Pass
2**	2755.000	31.42	-10.61	54.0	-22.58	AV	2.00	150	Horizontal	Pass
3	3702.000	52.07	-5.93	74.0	-21.93	Peak	113.00	150	Horizontal	Pass
3**	3702.000	36.57	-5.93	54.0	-17.43	AV	113.00	150	Horizontal	Pass
4	5272.000	108.21	-3.13	--	-141.79	Peak	250.00	150	Horizontal	N/A
4**	5272.000	99.37	-3.13	--	99.37	AV	250.00	150	Horizontal	N/A
5	7560.625	48.58	-1.97	74.0	-25.42	Peak	35.00	150	Horizontal	Pass
5**	7560.625	37.86	-1.97	54.0	-16.14	AV	35.00	150	Horizontal	Pass
6	11999.625	51.05	1.46	74.0	-22.95	Peak	182.00	150	Horizontal	Pass
6**	11999.625	39.53	1.46	54.0	-14.47	AV	182.00	150	Horizontal	Pass

11n40, Band II, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1568.000	39.75	-17.04	74.0	-34.25	Peak	111.00	150	Vertical	Pass
1**	1568.000	23.55	-17.04	54.0	-30.45	AV	111.00	150	Vertical	Pass
2	2758.500	48.07	-10.42	74.0	-25.93	Peak	38.00	150	Vertical	Pass
2**	2758.500	31.47	-10.42	54.0	-22.53	AV	38.00	150	Vertical	Pass
3	3814.000	52.07	-5.72	74.0	-21.93	Peak	42.00	150	Vertical	Pass
3**	3814.000	35.46	-5.72	54.0	-18.54	AV	42.00	150	Vertical	Pass
4	5315.000	97.97	-2.97	--	-83.03	Peak	181.00	150	Vertical	N/A
4**	5315.000	89.92	-2.97	--	89.92	AV	181.00	150	Vertical	N/A
5	8299.500	49.19	-1.01	74.0	-24.81	Peak	185.00	150	Vertical	Pass
5**	8299.500	38.25	-1.01	54.0	-15.75	AV	185.00	150	Vertical	Pass
6	12275.625	50.99	1.90	74.0	-23.01	Peak	75.00	150	Vertical	Pass
6**	12275.625	40.00	1.90	54.0	-14.00	AV	75.00	150	Vertical	Pass

11n40, Band II, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2736.000	48.12	-10.71	74.0	-25.88	Peak	209.00	150	Horizontal	Pass
1**	2736.000	31.18	-10.71	54.0	-22.82	AV	209.00	150	Horizontal	Pass
2	3653.000	52.46	-6.31	74.0	-21.54	Peak	34.00	150	Horizontal	Pass
2**	3653.000	36.40	-6.31	54.0	-17.60	AV	34.00	150	Horizontal	Pass
3	5312.000	106.59	-3.12	--	-160.41	Peak	267.00	150	Horizontal	N/A
3**	5312.000	98.00	-3.12	--	98.00	AV	267.00	150	Horizontal	N/A
4	5380.000	58.73	-2.63	74.0	-15.27	Peak	239.00	150	Horizontal	Pass
4**	5380.000	47.97	-2.63	54.0	-6.03	AV	239.00	150	Horizontal	Pass
5	7516.063	47.88	-2.50	74.0	-26.12	Peak	334.00	150	Horizontal	Pass
5**	7516.063	37.06	-2.50	54.0	-16.94	AV	334.00	150	Horizontal	Pass
6	11910.500	50.79	1.87	74.0	-23.21	Peak	84.00	150	Horizontal	Pass
6**	11910.500	39.36	1.87	54.0	-14.64	AV	84.00	150	Horizontal	Pass

11ac20, Band II, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1340.000	40.49	-17.08	74.0	-33.51	Peak	239.00	150	Vertical	Pass
1**	1340.000	23.62	-17.08	54.0	-30.38	AV	239.00	150	Vertical	Pass
2	2830.500	47.78	-10.10	74.0	-26.22	Peak	344.00	150	Vertical	Pass
2**	2830.500	32.22	-10.10	54.0	-21.78	AV	344.00	150	Vertical	Pass
3	3667.000	52.16	-7.24	74.0	-21.84	Peak	221.00	150	Vertical	Pass
3**	3667.000	36.88	-7.24	54.0	-17.12	AV	221.00	150	Vertical	Pass
4	5261.000	100.95	-3.14	--	-96.05	Peak	197.00	150	Vertical	N/A
4**	5261.000	92.52	-3.14	--	92.52	AV	197.00	150	Vertical	N/A
5	8300.938	48.72	-1.00	74.0	-25.28	Peak	0.00	150	Vertical	Pass
5**	8300.938	37.48	-1.00	54.0	-16.52	AV	0.00	150	Vertical	Pass
6	11934.937	50.40	1.81	74.0	-23.60	Peak	183.00	150	Vertical	Pass
6**	11934.937	39.87	1.81	54.0	-14.13	AV	183.00	150	Vertical	Pass

11ac20, Band II, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1366.500	39.24	-17.35	74.0	-34.76	Peak	289.00	150	Horizontal	Pass
1**	1366.500	23.29	-17.35	54.0	-30.71	AV	289.00	150	Horizontal	Pass
2	2828.000	47.65	-9.97	74.0	-26.35	Peak	295.00	150	Horizontal	Pass
2**	2828.000	31.79	-9.97	54.0	-22.21	AV	295.00	150	Horizontal	Pass
3	3647.000	53.04	-6.23	74.0	-20.96	Peak	360.00	150	Horizontal	Pass
3**	3647.000	36.82	-6.23	54.0	-17.18	AV	360.00	150	Horizontal	Pass
4	5261.000	111.12	-3.14	--	-120.88	Peak	232.00	150	Horizontal	N/A
4**	5261.000	101.37	-3.14	--	101.37	AV	232.00	150	Horizontal	N/A
5	8390.063	48.60	-0.89	74.0	-25.40	Peak	285.00	150	Horizontal	Pass
5**	8390.063	37.69	-0.89	54.0	-16.31	AV	285.00	150	Horizontal	Pass
6	11821.375	50.56	1.20	74.0	-23.44	Peak	0.00	150	Horizontal	Pass
6**	11821.375	39.34	1.20	54.0	-14.66	AV	0.00	150	Horizontal	Pass

11ac20, Band II, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1513.500	40.20	-17.40	74.0	-33.80	Peak	345.00	150	Vertical	Pass
1**	1513.500	23.45	-17.40	54.0	-30.55	AV	345.00	150	Vertical	Pass
2	2819.000	47.60	-10.11	74.0	-26.40	Peak	119.00	150	Vertical	Pass
2**	2819.000	32.27	-10.11	54.0	-21.73	AV	119.00	150	Vertical	Pass
3	3688.000	51.96	-6.37	74.0	-22.04	Peak	222.00	150	Vertical	Pass
3**	3688.000	36.42	-6.37	54.0	-17.58	AV	222.00	150	Vertical	Pass
4	5299.000	101.42	-3.10	--	-87.58	Peak	189.00	150	Vertical	N/A
4**	5299.000	93.04	-3.10	--	93.04	AV	189.00	150	Vertical	N/A
5	7493.063	48.00	-3.20	74.0	-26.00	Peak	270.00	150	Vertical	Pass
5**	7493.063	37.69	-3.20	54.0	-16.31	AV	270.00	150	Vertical	Pass
6	12229.625	50.89	1.69	74.0	-23.11	Peak	335.00	150	Vertical	Pass
6**	12229.625	40.46	1.69	54.0	-13.54	AV	335.00	150	Vertical	Pass

11ac20, Band II, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1502.000	39.57	-17.27	74.0	-34.43	Peak	272.00	150	Horizontal	Pass
1**	1502.000	23.54	-17.27	54.0	-30.46	AV	272.00	150	Horizontal	Pass
2	2799.500	48.36	-10.04	74.0	-25.64	Peak	216.00	150	Horizontal	Pass
2**	2799.500	32.19	-10.04	54.0	-21.81	AV	216.00	150	Horizontal	Pass
3	3692.000	51.62	-6.05	74.0	-22.38	Peak	42.00	150	Horizontal	Pass
3**	3692.000	36.43	-6.05	54.0	-17.57	AV	42.00	150	Horizontal	Pass
4	5298.000	110.12	-3.06	--	-139.88	Peak	250.00	150	Horizontal	N/A
4**	5298.000	101.71	-3.06	--	101.71	AV	250.00	150	Horizontal	N/A
5	7610.937	48.84	-2.62	74.0	-25.16	Peak	42.00	150	Horizontal	Pass
5**	7610.937	36.97	-2.62	54.0	-17.03	AV	42.00	150	Horizontal	Pass
6	11993.875	50.78	1.40	74.0	-23.22	Peak	223.00	150	Horizontal	Pass
6**	11993.875	39.97	1.40	54.0	-14.03	AV	223.00	150	Horizontal	Pass

11ac20, Band II, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1557.500	40.02	-17.40	74.0	-33.98	Peak	214.00	150	Vertical	Pass
1**	1557.500	23.52	-17.40	54.0	-30.48	AV	214.00	150	Vertical	Pass
2	2796.000	49.05	-10.24	74.0	-24.95	Peak	12.00	150	Vertical	Pass
2**	2796.000	31.72	-10.24	54.0	-22.28	AV	12.00	150	Vertical	Pass
3	3710.000	52.71	-6.27	74.0	-21.29	Peak	38.00	150	Vertical	Pass
3**	3710.000	35.82	-6.27	54.0	-18.18	AV	38.00	150	Vertical	Pass
4	5321.000	101.18	-3.04	--	-45.82	Peak	147.00	150	Vertical	N/A
4**	5321.000	91.95	-3.04	--	91.95	AV	147.00	150	Vertical	N/A
5	8391.500	48.55	-0.49	74.0	-25.45	Peak	0.00	150	Vertical	Pass
5**	8391.500	38.37	-0.49	54.0	-15.63	AV	0.00	150	Vertical	Pass
6	12067.188	50.81	1.15	74.0	-23.19	Peak	119.00	150	Vertical	Pass
6**	12067.188	39.47	1.15	54.0	-14.53	AV	119.00	150	Vertical	Pass

11ac20, Band II, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1510.000	39.74	-17.31	74.0	-34.26	Peak	191.00	150	Horizontal	Pass
1**	1510.000	23.34	-17.31	54.0	-30.66	AV	191.00	150	Horizontal	Pass
2	2840.500	47.97	-9.89	74.0	-26.03	Peak	290.00	150	Horizontal	Pass
2**	2840.500	31.98	-9.89	54.0	-22.02	AV	290.00	150	Horizontal	Pass
3	3706.000	51.78	-6.13	74.0	-22.22	Peak	196.00	150	Horizontal	Pass
3**	3706.000	36.10	-6.13	54.0	-17.90	AV	196.00	150	Horizontal	Pass
4	5319.000	109.86	-3.12	--	-135.14	Peak	245.00	150	Horizontal	N/A
4**	5319.000	100.97	-3.12	--	100.97	AV	245.00	150	Horizontal	N/A
5	8309.562	49.14	-0.77	74.0	-24.86	Peak	92.00	150	Horizontal	Pass
5**	8309.562	38.06	-0.77	54.0	-15.94	AV	92.00	150	Horizontal	Pass
6	12305.812	51.09	1.72	74.0	-22.91	Peak	350.00	150	Horizontal	Pass
6**	12305.812	39.46	1.72	54.0	-14.54	AV	350.00	150	Horizontal	Pass

11ac40, Band II, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1566.500	39.61	-17.17	74.0	-34.39	Peak	182.00	150	Vertical	Pass
1**	1566.500	23.80	-17.17	54.0	-30.20	AV	182.00	150	Vertical	Pass
2	2813.500	47.67	-9.98	74.0	-26.33	Peak	91.00	150	Vertical	Pass
2**	2813.500	32.27	-9.98	54.0	-21.73	AV	91.00	150	Vertical	Pass
3	3657.000	51.76	-6.75	74.0	-22.24	Peak	182.00	150	Vertical	Pass
3**	3657.000	36.16	-6.75	54.0	-17.84	AV	182.00	150	Vertical	Pass
4	5272.000	98.96	-3.13	--	-83.04	Peak	182.00	150	Vertical	N/A
4**	5272.000	89.62	-3.13	--	89.62	AV	182.00	150	Vertical	N/A
5	8224.750	49.06	-1.77	74.0	-24.94	Peak	66.00	150	Vertical	Pass
5**	8224.750	36.99	-1.77	54.0	-17.01	AV	66.00	150	Vertical	Pass
6	12279.937	50.88	2.09	74.0	-23.12	Peak	116.00	150	Vertical	Pass
6**	12279.937	39.61	2.09	54.0	-14.39	AV	116.00	150	Vertical	Pass

11ac40, Band II, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1531.000	39.72	-17.26	74.0	-34.28	Peak	73.00	150	Horizontal	Pass
1**	1531.000	23.98	-17.26	54.0	-30.02	AV	73.00	150	Horizontal	Pass
2	2807.500	47.67	-10.03	74.0	-26.33	Peak	170.00	150	Horizontal	Pass
2**	2807.500	32.10	-10.03	54.0	-21.90	AV	170.00	150	Horizontal	Pass
3	3657.000	52.38	-6.75	74.0	-21.62	Peak	99.00	150	Horizontal	Pass
3**	3657.000	35.96	-6.75	54.0	-18.04	AV	99.00	150	Horizontal	Pass
4	5272.000	108.12	-3.13	--	-137.88	Peak	246.00	150	Horizontal	N/A
4**	5272.000	99.41	-3.13	--	99.41	AV	246.00	150	Horizontal	N/A
5	7553.438	48.84	-1.79	74.0	-25.16	Peak	21.00	150	Horizontal	Pass
5**	7553.438	37.30	-1.79	54.0	-16.70	AV	21.00	150	Horizontal	Pass
6	12279.937	50.78	2.09	74.0	-23.22	Peak	276.00	150	Horizontal	Pass
6**	12279.937	40.22	2.09	54.0	-13.78	AV	276.00	150	Horizontal	Pass

11ac40, Band II, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1395.500	39.93	-17.05	74.0	-34.07	Peak	78.00	150	Vertical	Pass
1**	1395.500	24.28	-17.05	54.0	-29.72	AV	78.00	150	Vertical	Pass
2	2832.500	48.61	-10.00	74.0	-25.39	Peak	156.00	150	Vertical	Pass
2**	2832.500	31.88	-10.00	54.0	-22.12	AV	156.00	150	Vertical	Pass
3	3649.000	52.33	-6.36	74.0	-21.67	Peak	336.00	150	Vertical	Pass
3**	3649.000	36.72	-6.36	54.0	-17.28	AV	336.00	150	Vertical	Pass
4	5305.000	97.57	-3.20	--	-99.43	Peak	197.00	150	Vertical	N/A
4**	5305.000	89.81	-3.20	--	89.81	AV	197.00	150	Vertical	N/A
5	8174.437	48.18	-2.30	74.0	-25.82	Peak	120.00	150	Vertical	Pass
5**	8174.437	37.37	-2.30	54.0	-16.63	AV	120.00	150	Vertical	Pass
6	11900.438	50.75	2.23	74.0	-23.25	Peak	223.00	150	Vertical	Pass
6**	11900.438	39.88	2.23	54.0	-14.12	AV	223.00	150	Vertical	Pass

11ac40, Band II, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1533.000	40.21	-17.32	74.0	-33.79	Peak	360.00	150	Horizontal	Pass
1**	1533.000	23.75	-17.32	54.0	-30.25	AV	360.00	150	Horizontal	Pass
2	2782.500	47.85	-10.00	74.0	-26.15	Peak	136.00	150	Horizontal	Pass
2**	2782.500	32.58	-10.00	54.0	-21.42	AV	136.00	150	Horizontal	Pass
3	3648.000	52.09	-6.30	74.0	-21.91	Peak	262.00	150	Horizontal	Pass
3**	3648.000	36.98	-6.30	54.0	-17.02	AV	262.00	150	Horizontal	Pass
4	5313.000	106.79	-3.06	--	-118.21	Peak	225.00	150	Horizontal	N/A
4**	5313.000	98.54	-3.06	--	98.54	AV	225.00	150	Horizontal	N/A
5	8210.375	48.60	-1.94	74.0	-25.40	Peak	200.00	150	Horizontal	Pass
5**	8210.375	37.06	-1.94	54.0	-16.94	AV	200.00	150	Horizontal	Pass
6	11499.375	50.14	0.29	74.0	-23.86	Peak	0.00	150	Horizontal	Pass
6**	11499.375	39.59	0.29	54.0	-14.41	AV	0.00	150	Horizontal	Pass

11ac80, Band II, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1531.000	39.73	-17.26	74.0	-34.27	Peak	357.00	150	Vertical	Pass
1**	1531.000	23.59	-17.26	54.0	-30.41	AV	357.00	150	Vertical	Pass
2	2803.000	47.71	-10.04	74.0	-26.29	Peak	34.00	150	Vertical	Pass
2**	2803.000	32.07	-10.04	54.0	-21.93	AV	34.00	150	Vertical	Pass
3	3692.000	51.58	-6.05	74.0	-22.42	Peak	12.00	150	Vertical	Pass
3**	3692.000	36.40	-6.05	54.0	-17.60	AV	12.00	150	Vertical	Pass
4	5289.000	93.63	-3.22	--	89.63	Peak	4.00	150	Vertical	N/A
4**	5289.000	85.41	-3.22	--	85.41	AV	4.00	150	Vertical	N/A
5	7365.125	48.32	-3.39	74.0	-25.68	Peak	142.00	150	Vertical	Pass
5**	7365.125	38.13	-3.39	54.0	-15.87	AV	142.00	150	Vertical	Pass
6	12003.937	50.93	1.49	74.0	-23.07	Peak	67.00	150	Vertical	Pass
6**	12003.937	39.45	1.49	54.0	-14.55	AV	67.00	150	Vertical	Pass

11ac80, Band II, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1566.000	39.82	-17.22	74.0	-34.18	Peak	7.00	150	Horizontal	Pass
1**	1566.000	23.58	-17.22	54.0	-30.42	AV	7.00	150	Horizontal	Pass
2	2792.500	47.82	-10.41	74.0	-26.18	Peak	127.00	150	Horizontal	Pass
2**	2792.500	31.77	-10.41	54.0	-22.23	AV	127.00	150	Horizontal	Pass
3	3647.000	52.42	-6.23	74.0	-21.58	Peak	315.00	150	Horizontal	Pass
3**	3647.000	37.24	-6.23	54.0	-16.76	AV	315.00	150	Horizontal	Pass
4	5271.000	102.80	-3.07	--	-136.20	Peak	239.00	150	Horizontal	N/A
4**	5271.000	93.83	-3.07	--	93.83	AV	239.00	150	Horizontal	N/A
5	8312.437	47.87	-1.12	74.0	-26.13	Peak	325.00	150	Horizontal	Pass
5**	8312.437	37.66	-1.12	54.0	-16.34	AV	325.00	150	Horizontal	Pass
6	12182.187	50.69	1.00	74.0	-23.31	Peak	117.00	150	Horizontal	Pass
6**	12182.187	39.20	1.00	54.0	-14.80	AV	117.00	150	Horizontal	Pass

11a, Band III, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.500	40.23	-17.17	74.0	-33.77	Peak	297.00	150	Vertical	Pass
1**	1500.500	24.18	-17.17	54.0	-29.82	AV	297.00	150	Vertical	Pass
2	2798.500	48.49	-9.99	74.0	-25.51	Peak	30.00	150	Vertical	Pass
2**	2798.500	32.41	-9.99	54.0	-21.59	AV	30.00	150	Vertical	Pass
3	3645.000	51.96	-6.25	74.0	-22.04	Peak	361.00	150	Vertical	Pass
3**	3645.000	36.77	-6.25	54.0	-17.23	AV	361.00	150	Vertical	Pass
4	5499.000	100.80	-2.17	--	-97.20	Peak	198.00	150	Vertical	N/A
4**	5499.000	94.16	-2.17	--	94.16	AV	198.00	150	Vertical	N/A
5	7447.063	48.94	-3.27	74.0	-25.06	Peak	172.00	150	Vertical	Pass
5**	7447.063	32.02	-3.27	54.0	-21.98	AV	172.00	150	Vertical	Pass
6	11995.312	52.32	1.42	74.0	-21.68	Peak	35.00	150	Vertical	Pass
6**	11995.312	36.10	1.42	54.0	-17.90	AV	35.00	150	Vertical	Pass

11a, Band III, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1602.000	39.84	-17.32	74.0	-34.16	Peak	115.00	150	Horizontal	Pass
1**	1602.000	23.92	-17.32	54.0	-30.08	AV	115.00	150	Horizontal	Pass
2	2815.500	47.50	-10.02	74.0	-26.50	Peak	299.00	150	Horizontal	Pass
2**	2815.500	31.97	-10.02	54.0	-22.03	AV	299.00	150	Horizontal	Pass
3	3807.000	51.24	-5.75	74.0	-22.76	Peak	268.00	150	Horizontal	Pass
3**	3807.000	35.72	-5.75	54.0	-18.28	AV	268.00	150	Horizontal	Pass
4	5499.000	106.98	-2.17	--	-132.02	Peak	239.00	150	Horizontal	N/A
4**	5499.000	100.13	-2.17	--	100.13	AV	239.00	150	Horizontal	N/A
5	7573.562	49.11	-2.44	74.0	-24.89	Peak	259.00	150	Horizontal	Pass
5**	7573.562	32.71	-2.44	54.0	-21.29	AV	259.00	150	Horizontal	Pass
6	12107.437	53.14	0.89	74.0	-20.86	Peak	60.00	150	Horizontal	Pass
6**	12107.437	35.42	0.89	54.0	-18.58	AV	60.00	150	Horizontal	Pass

11a, Band III, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1553.500	39.88	-17.35	74.0	-34.12	Peak	29.00	150	Vertical	Pass
1**	1553.500	23.16	-17.35	54.0	-30.84	AV	29.00	150	Vertical	Pass
2	2763.500	48.20	-10.65	74.0	-25.80	Peak	360.00	150	Vertical	Pass
2**	2763.500	31.19	-10.65	54.0	-22.81	AV	360.00	150	Vertical	Pass
3	3701.000	52.42	-5.94	74.0	-21.58	Peak	17.00	150	Vertical	Pass
3**	3701.000	35.99	-5.94	54.0	-18.01	AV	17.00	150	Vertical	Pass
4	5578.000	100.74	-2.38	--	-105.26	Peak	206.00	150	Vertical	N/A
4**	5578.000	92.63	-2.38	--	92.63	AV	206.00	150	Vertical	N/A
5	7562.062	49.13	-2.04	74.0	-24.87	Peak	192.00	150	Vertical	Pass
5**	7562.062	33.24	-2.04	54.0	-20.76	AV	192.00	150	Vertical	Pass
6	11906.187	51.94	2.00	74.0	-22.06	Peak	263.00	150	Vertical	Pass
6**	11906.187	35.77	2.00	54.0	-18.23	AV	263.00	150	Vertical	Pass

11a, Band III, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1459.000	40.71	-17.21	74.0	-33.29	Peak	322.00	150	Horizontal	Pass
1**	1459.000	23.36	-17.21	54.0	-30.64	AV	322.00	150	Horizontal	Pass
2	2740.000	47.77	-10.78	74.0	-26.23	Peak	270.00	150	Horizontal	Pass
2**	2740.000	31.26	-10.78	54.0	-22.74	AV	270.00	150	Horizontal	Pass
3	3641.000	52.07	-6.79	74.0	-21.93	Peak	361.00	150	Horizontal	Pass
3**	3641.000	36.51	-6.79	54.0	-17.49	AV	361.00	150	Horizontal	Pass
4	5579.000	105.86	-2.34	--	-170.14	Peak	276.00	150	Horizontal	N/A
4**	5579.000	98.48	-2.34	--	98.48	AV	276.00	150	Horizontal	N/A
5	8300.938	50.10	-1.00	74.0	-23.90	Peak	14.00	150	Horizontal	Pass
5**	8300.938	33.48	-1.00	54.0	-20.52	AV	14.00	150	Horizontal	Pass
6	12120.375	52.37	0.88	74.0	-21.63	Peak	145.00	150	Horizontal	Pass
6**	12120.375	35.72	0.88	54.0	-18.28	AV	145.00	150	Horizontal	Pass

11a, Band III, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1350.000	40.52	-17.44	74.0	-33.48	Peak	115.00	150	Vertical	Pass
1**	1350.000	23.44	-17.44	54.0	-30.56	AV	115.00	150	Vertical	Pass
2	2802.500	47.87	-10.09	74.0	-26.13	Peak	62.00	150	Vertical	Pass
2**	2802.500	31.73	-10.09	54.0	-22.27	AV	62.00	150	Vertical	Pass
3	3686.000	51.85	-6.45	74.0	-22.15	Peak	259.00	150	Vertical	Pass
3**	3686.000	35.95	-6.45	54.0	-18.05	AV	259.00	150	Vertical	Pass
4	5699.000	99.43	-2.25	--	-94.57	Peak	194.00	150	Vertical	N/A
4**	5699.000	92.26	-2.25	--	92.26	AV	194.00	150	Vertical	N/A
5	7621.000	48.84	-2.83	74.0	-25.16	Peak	36.00	150	Vertical	Pass
5**	7621.000	33.25	-2.83	54.0	-20.75	AV	36.00	150	Vertical	Pass
6	12334.562	52.68	1.90	74.0	-21.32	Peak	180.00	150	Vertical	Pass
6**	12334.562	35.59	1.90	54.0	-18.41	AV	180.00	150	Vertical	Pass

11a, Band III, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.000	40.46	-17.31	74.0	-33.54	Peak	332.00	150	Horizontal	Pass
1**	1485.000	23.53	-17.31	54.0	-30.47	AV	332.00	150	Horizontal	Pass
2	2809.500	47.82	-9.97	74.0	-26.18	Peak	360.00	150	Horizontal	Pass
2**	2809.500	32.17	-9.97	54.0	-21.83	AV	360.00	150	Horizontal	Pass
3	3683.000	51.98	-6.52	74.0	-22.02	Peak	135.00	150	Horizontal	Pass
3**	3683.000	35.99	-6.52	54.0	-18.01	AV	135.00	150	Horizontal	Pass
4	5702.000	103.92	-2.45	--	21.92	Peak	82.00	150	Horizontal	N/A
4**	5702.000	97.14	-2.45	--	97.14	AV	82.00	150	Horizontal	N/A
5	7524.687	49.70	-2.50	74.0	-24.30	Peak	75.00	150	Horizontal	Pass
5**	7524.687	32.33	-2.50	54.0	-21.67	AV	75.00	150	Horizontal	Pass
6	12223.875	53.70	1.69	74.0	-20.30	Peak	96.00	150	Horizontal	Pass
6**	12223.875	36.47	1.69	54.0	-17.53	AV	96.00	150	Horizontal	Pass

11n20, Band III, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1517.500	41.14	-17.23	74.0	-32.86	Peak	360.00	150	Vertical	Pass
1**	1517.500	23.50	-17.23	54.0	-30.50	AV	360.00	150	Vertical	Pass
2	2773.000	47.75	-10.40	74.0	-26.25	Peak	-1.00	150	Vertical	Pass
2**	2773.000	32.04	-10.40	54.0	-21.96	AV	-1.00	150	Vertical	Pass
3	3643.000	52.50	-6.59	74.0	-21.50	Peak	344.00	150	Vertical	Pass
3**	3643.000	36.56	-6.59	54.0	-17.44	AV	344.00	150	Vertical	Pass
4	5498.000	101.45	-2.16	--	-86.55	Peak	188.00	150	Vertical	N/A
4**	5498.000	93.49	-2.16	--	93.49	AV	188.00	150	Vertical	N/A
5	7460.000	48.92	-3.34	74.0	-25.08	Peak	14.00	150	Vertical	Pass
5**	7460.000	32.82	-3.34	54.0	-21.18	AV	14.00	150	Vertical	Pass
6	12367.625	52.28	1.56	74.0	-21.72	Peak	321.00	150	Vertical	Pass
6**	12367.625	35.73	1.56	54.0	-18.27	AV	321.00	150	Vertical	Pass

11n20, Band III, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1351.500	39.66	-17.38	74.0	-34.34	Peak	272.00	150	Horizontal	Pass
1**	1351.500	23.17	-17.38	54.0	-30.83	AV	272.00	150	Horizontal	Pass
2	2827.500	48.32	-9.95	74.0	-25.68	Peak	306.00	150	Horizontal	Pass
2**	2827.500	32.39	-9.95	54.0	-21.61	AV	306.00	150	Horizontal	Pass
3	3951.000	52.41	-4.67	74.0	-21.59	Peak	133.00	150	Horizontal	Pass
3**	3951.000	35.75	-4.67	54.0	-18.25	AV	133.00	150	Horizontal	Pass
4	5501.000	106.53	-2.30	--	6.53	Peak	100.00	150	Horizontal	N/A
4**	5501.000	97.78	-2.30	--	97.78	AV	100.00	150	Horizontal	N/A
5	7566.375	49.43	-2.43	74.0	-24.57	Peak	-1.00	150	Horizontal	Pass
5**	7566.375	33.28	-2.43	54.0	-20.72	AV	-1.00	150	Horizontal	Pass
6	12002.500	51.68	1.48	74.0	-22.32	Peak	4.00	150	Horizontal	Pass
6**	12002.500	35.21	1.48	54.0	-18.79	AV	4.00	150	Horizontal	Pass

11n20, Band III, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1499.000	40.03	-17.37	74.0	-33.97	Peak	243.00	150	Vertical	Pass
1**	1499.000	23.15	-17.37	54.0	-30.85	AV	243.00	150	Vertical	Pass
2	2797.000	48.26	-10.19	74.0	-25.74	Peak	219.00	150	Vertical	Pass
2**	2797.000	32.26	-10.19	54.0	-21.74	AV	219.00	150	Vertical	Pass
3	3696.000	51.96	-6.09	74.0	-22.04	Peak	325.00	150	Vertical	Pass
3**	3696.000	36.79	-6.09	54.0	-17.21	AV	325.00	150	Vertical	Pass
4	5578.000	101.75	-2.38	--	-29.25	Peak	131.00	150	Vertical	N/A
4**	5578.000	91.83	-2.38	--	91.83	AV	131.00	150	Vertical	N/A
5	7554.875	48.97	-1.66	74.0	-25.03	Peak	361.00	150	Vertical	Pass
5**	7554.875	33.72	-1.66	54.0	-20.28	AV	361.00	150	Vertical	Pass
6	11877.437	52.94	1.77	74.0	-21.06	Peak	36.00	150	Vertical	Pass
6**	11877.437	35.89	1.77	54.0	-18.11	AV	36.00	150	Vertical	Pass

11n20, Band III, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1531.000	39.90	-17.26	74.0	-34.10	Peak	24.00	150	Horizontal	Pass
1**	1531.000	23.59	-17.26	54.0	-30.41	AV	24.00	150	Horizontal	Pass
2	2799.500	48.57	-10.04	74.0	-25.43	Peak	360.00	150	Horizontal	Pass
2**	2799.500	32.44	-10.04	54.0	-21.56	AV	360.00	150	Horizontal	Pass
3	3960.000	51.82	-4.86	74.0	-22.18	Peak	174.00	150	Horizontal	Pass
3**	3960.000	35.87	-4.86	54.0	-18.13	AV	174.00	150	Horizontal	Pass
4	5581.000	106.69	-2.37	--	-173.31	Peak	280.00	150	Horizontal	N/A
4**	5581.000	98.25	-2.37	--	98.25	AV	280.00	150	Horizontal	N/A
5	7609.500	50.33	-2.53	74.0	-23.67	Peak	126.00	150	Horizontal	Pass
5**	7609.500	33.34	-2.53	54.0	-20.66	AV	126.00	150	Horizontal	Pass
6	11676.188	52.58	0.61	74.0	-21.42	Peak	341.00	150	Horizontal	Pass
6**	11676.188	35.75	0.61	54.0	-18.25	AV	341.00	150	Horizontal	Pass

11n20, Band III, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1338.500	40.31	-17.12	74.0	-33.69	Peak	338.00	150	Vertical	Pass
1**	1338.500	23.73	-17.12	54.0	-30.27	AV	338.00	150	Vertical	Pass
2	2820.500	47.82	-9.95	74.0	-26.18	Peak	338.00	150	Vertical	Pass
2**	2820.500	32.53	-9.95	54.0	-21.47	AV	338.00	150	Vertical	Pass
3	3653.000	52.57	-6.31	74.0	-21.43	Peak	-1.00	150	Vertical	Pass
3**	3653.000	36.50	-6.31	54.0	-17.50	AV	-1.00	150	Vertical	Pass
4	5701.000	100.26	-2.43	--	-96.74	Peak	197.00	150	Vertical	N/A
4**	5701.000	91.72	-2.43	--	91.72	AV	197.00	150	Vertical	N/A
5	7556.313	49.59	-2.05	74.0	-24.41	Peak	90.00	150	Vertical	Pass
5**	7556.313	33.25	-2.05	54.0	-20.75	AV	90.00	150	Vertical	Pass
6	12353.250	53.28	1.70	74.0	-20.72	Peak	39.00	150	Vertical	Pass
6**	12353.250	37.02	1.70	54.0	-16.98	AV	39.00	150	Vertical	Pass

11n20, Band III, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1395.500	39.51	-17.05	74.0	-34.49	Peak	100.00	150	Horizontal	Pass
1**	1395.500	23.74	-17.05	54.0	-30.26	AV	100.00	150	Horizontal	Pass
2	2780.500	47.95	-10.20	74.0	-26.05	Peak	87.00	150	Horizontal	Pass
2**	2780.500	32.23	-10.20	54.0	-21.77	AV	87.00	150	Horizontal	Pass
3	3682.000	51.77	-6.55	74.0	-22.23	Peak	311.00	150	Horizontal	Pass
3**	3682.000	35.78	-6.55	54.0	-18.22	AV	311.00	150	Horizontal	Pass
4	5703.000	104.63	-2.41	--	20.63	Peak	84.00	150	Horizontal	N/A
4**	5703.000	96.96	-2.41	--	96.96	AV	84.00	150	Horizontal	N/A
5	7580.750	49.14	-2.57	74.0	-24.86	Peak	264.00	150	Horizontal	Pass
5**	7580.750	32.99	-2.57	54.0	-21.01	AV	264.00	150	Horizontal	Pass
6	12282.812	53.44	2.09	74.0	-20.56	Peak	327.00	150	Horizontal	Pass
6**	12282.812	36.44	2.09	54.0	-17.56	AV	327.00	150	Horizontal	Pass

11n40, Band III, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1485.500	40.72	-17.33	74.0	-33.28	Peak	138.00	150	Vertical	Pass
1**	1485.500	23.85	-17.33	54.0	-30.15	AV	138.00	150	Vertical	Pass
2	2795.500	48.35	-10.24	74.0	-25.65	Peak	190.00	150	Vertical	Pass
2**	2795.500	32.44	-10.24	54.0	-21.56	AV	190.00	150	Vertical	Pass
3	3646.000	52.75	-6.22	74.0	-21.25	Peak	181.00	150	Vertical	Pass
3**	3646.000	37.63	-6.22	54.0	-16.37	AV	181.00	150	Vertical	Pass
4	5502.000	98.68	-2.34	--	-96.32	Peak	195.00	150	Vertical	N/A
4**	5502.000	90.20	-2.34	--	90.20	AV	195.00	150	Vertical	N/A
5	7556.313	49.31	-2.05	74.0	-24.69	Peak	164.00	150	Vertical	Pass
5**	7556.313	33.76	-2.05	54.0	-20.24	AV	164.00	150	Vertical	Pass
6	12340.312	52.75	1.93	74.0	-21.25	Peak	284.00	150	Vertical	Pass
6**	12340.312	36.11	1.93	54.0	-17.89	AV	284.00	150	Vertical	Pass

11n40, Band III, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1543.000	40.39	-17.44	74.0	-33.61	Peak	282.00	150	Horizontal	Pass
1**	1543.000	23.44	-17.44	54.0	-30.56	AV	282.00	150	Horizontal	Pass
2	2802.500	48.26	-10.09	74.0	-25.74	Peak	360.00	150	Horizontal	Pass
2**	2802.500	32.50	-10.09	54.0	-21.50	AV	360.00	150	Horizontal	Pass
3	3656.000	52.02	-6.58	74.0	-21.98	Peak	253.00	150	Horizontal	Pass
3**	3656.000	36.41	-6.58	54.0	-17.59	AV	253.00	150	Horizontal	Pass
4	5512.000	104.19	-2.30	--	-200.81	Peak	305.00	150	Horizontal	N/A
4**	5512.000	96.39	-2.30	--	96.39	AV	305.00	150	Horizontal	N/A
5	7454.250	49.17	-3.47	74.0	-24.83	Peak	130.00	150	Horizontal	Pass
5**	7454.250	32.58	-3.47	54.0	-21.42	AV	130.00	150	Horizontal	Pass
6	12057.125	52.15	1.34	74.0	-21.85	Peak	13.00	150	Horizontal	Pass
6**	12057.125	36.10	1.34	54.0	-17.90	AV	13.00	150	Horizontal	Pass

11n40, Band III, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1567.500	40.10	-17.08	74.0	-33.90	Peak	25.00	150	Vertical	Pass
1**	1567.500	23.75	-17.08	54.0	-30.25	AV	25.00	150	Vertical	Pass
2	2848.000	48.56	-10.18	74.0	-25.44	Peak	294.00	150	Vertical	Pass
2**	2848.000	31.81	-10.18	54.0	-22.19	AV	294.00	150	Vertical	Pass
3	3953.000	53.10	-4.73	74.0	-20.90	Peak	0.00	150	Vertical	Pass
3**	3953.000	35.85	-4.73	54.0	-18.15	AV	0.00	150	Vertical	Pass
4	5595.000	98.49	-2.42	--	-100.51	Peak	199.00	150	Vertical	N/A
4**	5595.000	91.28	-2.42	--	91.28	AV	199.00	150	Vertical	N/A
5	7550.562	49.20	-1.85	74.0	-24.80	Peak	-1.00	150	Vertical	Pass
5**	7550.562	33.42	-1.85	54.0	-20.58	AV	-1.00	150	Vertical	Pass
6	12157.750	53.21	0.97	74.0	-20.79	Peak	335.00	150	Vertical	Pass
6**	12157.750	35.92	0.97	54.0	-18.08	AV	335.00	150	Vertical	Pass

11n40, Band III, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1392.000	39.11	-17.30	74.0	-34.89	Peak	201.00	150	Horizontal	Pass
1**	1392.000	23.42	-17.30	54.0	-30.58	AV	201.00	150	Horizontal	Pass
2	2783.500	48.02	-9.98	74.0	-25.98	Peak	214.00	150	Horizontal	Pass
2**	2783.500	32.28	-9.98	54.0	-21.72	AV	214.00	150	Horizontal	Pass
3	3644.000	52.03	-6.38	74.0	-21.97	Peak	9.00	150	Horizontal	Pass
3**	3644.000	36.61	-6.38	54.0	-17.39	AV	9.00	150	Horizontal	Pass
4	5594.000	104.39	-2.31	--	-138.61	Peak	243.00	150	Horizontal	N/A
4**	5594.000	95.99	-2.31	--	95.99	AV	243.00	150	Horizontal	N/A
5	8298.062	49.32	-0.86	74.0	-24.68	Peak	-1.00	150	Horizontal	Pass
5**	8298.062	33.47	-0.86	54.0	-20.53	AV	-1.00	150	Horizontal	Pass
6	11316.813	51.94	0.86	74.0	-22.06	Peak	351.00	150	Horizontal	Pass
6**	11316.813	35.39	0.86	54.0	-18.61	AV	351.00	150	Horizontal	Pass

11n40, Band III, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1385.500	39.86	-17.17	74.0	-34.14	Peak	360.00	150	Vertical	Pass
1**	1385.500	23.27	-17.17	54.0	-30.73	AV	360.00	150	Vertical	Pass
2	2810.000	48.55	-9.98	74.0	-25.45	Peak	122.00	150	Vertical	Pass
2**	2810.000	32.23	-9.98	54.0	-21.77	AV	122.00	150	Vertical	Pass
3	3692.000	52.11	-6.05	74.0	-21.89	Peak	311.00	150	Vertical	Pass
3**	3692.000	36.04	-6.05	54.0	-17.96	AV	311.00	150	Vertical	Pass
4	5665.000	97.45	-2.10	--	-141.55	Peak	239.00	150	Vertical	N/A
4**	5665.000	89.14	-2.10	--	89.14	AV	239.00	150	Vertical	N/A
5	8302.375	49.36	-0.78	74.0	-24.64	Peak	178.00	150	Vertical	Pass
5**	8302.375	33.65	-0.78	54.0	-20.35	AV	178.00	150	Vertical	Pass
6	12186.500	53.58	1.02	74.0	-20.42	Peak	120.00	150	Vertical	Pass
6**	12186.500	35.65	1.02	54.0	-18.35	AV	120.00	150	Vertical	Pass

11n40, Band III, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1551.500	40.29	-17.21	74.0	-33.71	Peak	249.00	150	Horizontal	Pass
1**	1551.500	23.99	-17.21	54.0	-30.01	AV	249.00	150	Horizontal	Pass
2	2800.500	48.00	-10.18	74.0	-26.00	Peak	306.00	150	Horizontal	Pass
2**	2800.500	32.25	-10.18	54.0	-21.75	AV	306.00	150	Horizontal	Pass
3	3656.000	51.79	-6.58	74.0	-22.21	Peak	65.00	150	Horizontal	Pass
3**	3656.000	36.14	-6.58	54.0	-17.86	AV	65.00	150	Horizontal	Pass
4	5672.000	102.75	-2.10	--	-4.25	Peak	107.00	150	Horizontal	N/A
4**	5672.000	93.86	-2.10	--	93.86	AV	107.00	150	Horizontal	N/A
5	7559.187	50.55	-1.83	74.0	-23.45	Peak	66.00	150	Horizontal	Pass
5**	7559.187	33.75	-1.83	54.0	-20.25	AV	66.00	150	Horizontal	Pass
6	12067.188	52.44	1.15	74.0	-21.56	Peak	335.00	150	Horizontal	Pass
6**	12067.188	36.19	1.15	54.0	-17.81	AV	335.00	150	Horizontal	Pass

11ac20, Band III, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1465.500	40.18	-17.21	74.0	-33.82	Peak	93.00	150	Vertical	Pass
1**	1465.500	23.31	-17.21	54.0	-30.69	AV	93.00	150	Vertical	Pass
2	2826.500	48.45	-9.91	74.0	-25.55	Peak	252.00	150	Vertical	Pass
2**	2826.500	32.34	-9.91	54.0	-21.66	AV	252.00	150	Vertical	Pass
3	3933.000	51.60	-5.59	74.0	-22.40	Peak	52.00	150	Vertical	Pass
3**	3933.000	35.44	-5.59	54.0	-18.56	AV	52.00	150	Vertical	Pass
4	5496.000	102.23	-2.31	--	-92.77	Peak	195.00	150	Vertical	N/A
4**	5496.000	93.89	-2.31	--	93.89	AV	195.00	150	Vertical	N/A
5	7631.063	48.94	-2.82	74.0	-25.06	Peak	162.00	150	Vertical	Pass
5**	7631.063	32.87	-2.82	54.0	-21.13	AV	162.00	150	Vertical	Pass
6	12005.375	53.38	1.49	74.0	-20.62	Peak	18.00	150	Vertical	Pass
6**	12005.375	35.78	1.49	54.0	-18.22	AV	18.00	150	Vertical	Pass

11ac20, Band III, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1325.000	40.16	-17.21	74.0	-33.84	Peak	360.00	150	Horizontal	Pass
1**	1325.000	23.46	-17.21	54.0	-30.54	AV	360.00	150	Horizontal	Pass
2	2787.500	48.02	-10.00	74.0	-25.98	Peak	288.00	150	Horizontal	Pass
2**	2787.500	32.55	-10.00	54.0	-21.45	AV	288.00	150	Horizontal	Pass
3	3822.000	52.57	-5.62	74.0	-21.43	Peak	333.00	150	Horizontal	Pass
3**	3822.000	35.75	-5.62	54.0	-18.25	AV	333.00	150	Horizontal	Pass
4	5499.000	108.72	-2.17	--	-137.28	Peak	246.00	150	Horizontal	N/A
4**	5499.000	99.53	-2.17	--	99.53	AV	246.00	150	Horizontal	N/A
5	8139.937	49.97	-2.06	74.0	-24.03	Peak	161.00	150	Horizontal	Pass
5**	8139.937	33.15	-2.06	54.0	-20.85	AV	161.00	150	Horizontal	Pass
6	12192.250	52.45	1.01	74.0	-21.55	Peak	205.00	150	Horizontal	Pass
6**	12192.250	35.63	1.01	54.0	-18.37	AV	205.00	150	Horizontal	Pass

11ac20, Band III, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1554.000	40.86	-17.30	74.0	-33.14	Peak	166.00	150	Vertical	Pass
1**	1554.000	23.45	-17.30	54.0	-30.55	AV	166.00	150	Vertical	Pass
2	2798.500	47.81	-9.99	74.0	-26.19	Peak	136.00	150	Vertical	Pass
2**	2798.500	31.97	-9.99	54.0	-22.03	AV	136.00	150	Vertical	Pass
3	3636.000	51.88	-6.80	74.0	-22.12	Peak	256.00	150	Vertical	Pass
3**	3636.000	36.35	-6.80	54.0	-17.65	AV	256.00	150	Vertical	Pass
4	5579.000	101.73	-2.34	--	-32.27	Peak	134.00	150	Vertical	N/A
4**	5579.000	92.59	-2.34	--	92.59	AV	134.00	150	Vertical	N/A
5	8188.812	49.48	-1.83	74.0	-24.52	Peak	179.00	150	Vertical	Pass
5**	8188.812	32.83	-1.83	54.0	-21.17	AV	179.00	150	Vertical	Pass
6	11329.750	52.14	0.78	74.0	-21.86	Peak	25.00	150	Vertical	Pass
6**	11329.750	35.54	0.78	54.0	-18.46	AV	25.00	150	Vertical	Pass

11ac20, Band III, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1574.000	40.49	-17.18	74.0	-33.51	Peak	18.00	150	Horizontal	Pass
1**	1574.000	23.35	-17.18	54.0	-30.65	AV	18.00	150	Horizontal	Pass
2	2762.500	47.54	-10.65	74.0	-26.46	Peak	166.00	150	Horizontal	Pass
2**	2762.500	31.49	-10.65	54.0	-22.51	AV	166.00	150	Horizontal	Pass
3	3651.000	52.01	-6.40	74.0	-21.99	Peak	279.00	150	Horizontal	Pass
3**	3651.000	36.26	-6.40	54.0	-17.74	AV	279.00	150	Horizontal	Pass
4	5581.000	107.09	-2.37	--	-186.91	Peak	294.00	150	Horizontal	N/A
4**	5581.000	97.44	-2.37	--	97.44	AV	294.00	150	Horizontal	N/A
5	7550.562	49.25	-1.85	74.0	-24.75	Peak	273.00	150	Horizontal	Pass
5**	7550.562	33.55	-1.85	54.0	-20.45	AV	273.00	150	Horizontal	Pass
6	11952.187	52.34	1.42	74.0	-21.66	Peak	273.00	150	Horizontal	Pass
6**	11952.187	35.56	1.42	54.0	-18.44	AV	273.00	150	Horizontal	Pass

11ac20, Band III, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1388.000	39.45	-17.35	74.0	-34.55	Peak	28.00	150	Vertical	Pass
1**	1388.000	23.47	-17.35	54.0	-30.53	AV	28.00	150	Vertical	Pass
2	2724.500	47.80	-10.65	74.0	-26.20	Peak	303.00	150	Vertical	Pass
2**	2724.500	31.78	-10.65	54.0	-22.22	AV	303.00	150	Vertical	Pass
3	3951.000	51.56	-4.67	74.0	-22.44	Peak	-1.00	150	Vertical	Pass
3**	3951.000	35.97	-4.67	54.0	-18.03	AV	-1.00	150	Vertical	Pass
4	5699.000	100.54	-2.25	--	-95.46	Peak	196.00	150	Vertical	N/A
4**	5699.000	92.36	-2.25	--	92.36	AV	196.00	150	Vertical	N/A
5	8305.250	49.43	-0.73	74.0	-24.57	Peak	-1.00	150	Vertical	Pass
5**	8305.250	33.86	-0.73	54.0	-20.14	AV	-1.00	150	Vertical	Pass
6	12054.250	52.85	1.39	74.0	-21.15	Peak	239.00	150	Vertical	Pass
6**	12054.250	35.70	1.39	54.0	-18.30	AV	239.00	150	Vertical	Pass

11ac20, Band III, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.500	39.83	-17.30	74.0	-34.17	Peak	145.00	150	Horizontal	Pass
1**	1484.500	23.57	-17.30	54.0	-30.43	AV	145.00	150	Horizontal	Pass
2	2821.000	47.76	-9.93	74.0	-26.24	Peak	254.00	150	Horizontal	Pass
2**	2821.000	31.91	-9.93	54.0	-22.09	AV	254.00	150	Horizontal	Pass
3	3684.000	51.74	-6.48	74.0	-22.26	Peak	278.00	150	Horizontal	Pass
3**	3684.000	36.09	-6.48	54.0	-17.91	AV	278.00	150	Horizontal	Pass
4	5699.000	105.00	-2.25	--	14.00	Peak	91.00	150	Horizontal	N/A
4**	5699.000	96.56	-2.25	--	96.56	AV	91.00	150	Horizontal	N/A
5	7613.813	49.06	-3.08	74.0	-24.94	Peak	0.00	150	Horizontal	Pass
5**	7613.813	32.26	-3.08	54.0	-21.74	AV	0.00	150	Horizontal	Pass
6	12169.250	52.37	1.04	74.0	-21.63	Peak	96.00	150	Horizontal	Pass
6**	12169.250	35.98	1.04	54.0	-18.02	AV	96.00	150	Horizontal	Pass

11ac40, Band III, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.500	39.71	-17.06	74.0	-34.29	Peak	283.00	150	Vertical	Pass
1**	1361.500	23.73	-17.06	54.0	-30.27	AV	283.00	150	Vertical	Pass
2	2802.000	47.76	-10.14	74.0	-26.24	Peak	138.00	150	Vertical	Pass
2**	2802.000	31.90	-10.14	54.0	-22.10	AV	138.00	150	Vertical	Pass
3	3706.000	52.58	-6.13	74.0	-21.42	Peak	94.00	150	Vertical	Pass
3**	3706.000	35.96	-6.13	54.0	-18.04	AV	94.00	150	Vertical	Pass
4	5497.000	97.99	-2.21	--	-93.01	Peak	191.00	150	Vertical	N/A
4**	5497.000	89.50	-2.21	--	89.50	AV	191.00	150	Vertical	N/A
5	8309.562	48.94	-0.77	74.0	-25.06	Peak	119.00	150	Vertical	Pass
5**	8309.562	33.53	-0.77	54.0	-20.47	AV	119.00	150	Vertical	Pass
6	11860.187	51.96	1.51	74.0	-22.04	Peak	314.00	150	Vertical	Pass
6**	11860.187	35.47	1.51	54.0	-18.53	AV	314.00	150	Vertical	Pass

11ac40, Band III, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1522.000	39.57	-17.45	74.0	-34.43	Peak	238.00	150	Horizontal	Pass
1**	1522.000	23.64	-17.45	54.0	-30.36	AV	238.00	150	Horizontal	Pass
2	2775.000	47.61	-10.45	74.0	-26.39	Peak	50.00	150	Horizontal	Pass
2**	2775.000	31.90	-10.45	54.0	-22.10	AV	50.00	150	Horizontal	Pass
3	4136.000	52.16	-4.90	74.0	-21.84	Peak	359.00	150	Horizontal	Pass
3**	4136.000	35.64	-4.90	54.0	-18.36	AV	359.00	150	Horizontal	Pass
4	5512.000	105.37	-2.30	--	-2.63	Peak	108.00	150	Horizontal	N/A
4**	5512.000	96.20	-2.30	--	96.20	AV	108.00	150	Horizontal	N/A
5	7564.938	49.32	-2.26	74.0	-24.68	Peak	157.00	150	Horizontal	Pass
5**	7564.938	33.23	-2.26	54.0	-20.77	AV	157.00	150	Horizontal	Pass
6	12049.937	53.17	1.39	74.0	-20.83	Peak	299.00	150	Horizontal	Pass
6**	12049.937	36.34	1.39	54.0	-17.66	AV	299.00	150	Horizontal	Pass

11ac40, Band III, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1544.500	39.68	-17.32	74.0	-34.32	Peak	216.00	150	Vertical	Pass
1**	1544.500	23.34	-17.32	54.0	-30.66	AV	216.00	150	Vertical	Pass
2	2794.500	47.49	-10.25	74.0	-26.51	Peak	347.00	150	Vertical	Pass
2**	2794.500	31.83	-10.25	54.0	-22.17	AV	347.00	150	Vertical	Pass
3	3654.000	52.35	-6.36	74.0	-21.65	Peak	194.00	150	Vertical	Pass
3**	3654.000	36.99	-6.36	54.0	-17.01	AV	194.00	150	Vertical	Pass
4	5593.000	99.00	-2.21	--	-95.00	Peak	194.00	150	Vertical	N/A
4**	5593.000	90.82	-2.21	--	90.82	AV	194.00	150	Vertical	N/A
5	7488.750	49.18	-3.17	74.0	-24.82	Peak	133.00	150	Vertical	Pass
5**	7488.750	33.07	-3.17	54.0	-20.93	AV	133.00	150	Vertical	Pass
6	11699.188	51.74	0.71	74.0	-22.26	Peak	133.00	150	Vertical	Pass
6**	11699.188	35.94	0.71	54.0	-18.06	AV	133.00	150	Vertical	Pass

11ac40, Band III, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1572.500	40.53	-16.95	74.0	-33.47	Peak	82.00	150	Horizontal	Pass
1**	1572.500	23.98	-16.95	54.0	-30.02	AV	82.00	150	Horizontal	Pass
2	2833.500	48.66	-9.96	74.0	-25.34	Peak	115.00	150	Horizontal	Pass
2**	2833.500	32.03	-9.96	54.0	-21.97	AV	115.00	150	Horizontal	Pass
3	3637.000	52.65	-6.85	74.0	-21.35	Peak	230.00	150	Horizontal	Pass
3**	3637.000	36.31	-6.85	54.0	-17.69	AV	230.00	150	Horizontal	Pass
4	5592.000	104.56	-2.35	--	-142.44	Peak	247.00	150	Horizontal	N/A
4**	5592.000	94.75	-2.35	--	94.75	AV	247.00	150	Horizontal	N/A
5	7544.813	49.86	-2.21	74.0	-24.14	Peak	-1.00	150	Horizontal	Pass
5**	7544.813	32.91	-2.21	54.0	-21.09	AV	-1.00	150	Horizontal	Pass
6	11932.063	52.66	1.75	74.0	-21.34	Peak	-1.00	150	Horizontal	Pass
6**	11932.063	35.99	1.75	54.0	-18.01	AV	-1.00	150	Horizontal	Pass

11ac40, Band III, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1396.000	41.97	-17.08	74.0	-32.03	Peak	360.00	150	Vertical	Pass
1**	1396.000	23.66	-17.08	54.0	-30.34	AV	360.00	150	Vertical	Pass
2	2783.500	47.78	-9.98	74.0	-26.22	Peak	37.00	150	Vertical	Pass
2**	2783.500	32.14	-9.98	54.0	-21.86	AV	37.00	150	Vertical	Pass
3	3636.000	52.25	-6.80	74.0	-21.75	Peak	251.00	150	Vertical	Pass
3**	3636.000	36.37	-6.80	54.0	-17.63	AV	251.00	150	Vertical	Pass
4	5660.000	97.65	-2.25	--	-102.35	Peak	200.00	150	Vertical	N/A
4**	5660.000	88.68	-2.25	--	88.68	AV	200.00	150	Vertical	N/A
5	7491.625	49.47	-3.22	74.0	-24.53	Peak	361.00	150	Vertical	Pass
5**	7491.625	32.37	-3.22	54.0	-21.63	AV	361.00	150	Vertical	Pass
6	12340.312	53.17	1.93	74.0	-20.83	Peak	-1.00	150	Vertical	Pass
6**	12340.312	36.86	1.93	54.0	-17.14	AV	-1.00	150	Vertical	Pass

11ac40, Band III, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.500	40.18	-16.93	74.0	-33.82	Peak	360.00	150	Horizontal	Pass
1**	1332.500	24.13	-16.93	54.0	-29.87	AV	360.00	150	Horizontal	Pass
2	2772.500	48.40	-10.36	74.0	-25.60	Peak	175.00	150	Horizontal	Pass
2**	2772.500	32.03	-10.36	54.0	-21.97	AV	175.00	150	Horizontal	Pass
3	3697.000	52.34	-6.05	74.0	-21.66	Peak	361.00	150	Horizontal	Pass
3**	3697.000	36.68	-6.05	54.0	-17.32	AV	361.00	150	Horizontal	Pass
4	5672.000	102.61	-2.10	--	-146.39	Peak	249.00	150	Horizontal	N/A
4**	5672.000	93.47	-2.10	--	93.47	AV	249.00	150	Horizontal	N/A
5	7560.625	49.77	-1.97	74.0	-24.23	Peak	244.00	150	Horizontal	Pass
5**	7560.625	37.38	-1.97	54.0	-16.62	AV	244.00	150	Horizontal	Pass
6	12213.812	52.91	1.53	74.0	-21.09	Peak	346.00	150	Horizontal	Pass
6**	12213.812	35.84	1.53	54.0	-18.16	AV	346.00	150	Horizontal	Pass

11ac80, Band III, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1526.000	39.90	-17.52	74.0	-34.10	Peak	342.00	150	Vertical	Pass
1**	1526.000	23.35	-17.52	54.0	-30.65	AV	342.00	150	Vertical	Pass
2	2847.000	47.77	-10.15	74.0	-26.23	Peak	217.00	150	Vertical	Pass
2**	2847.000	32.53	-10.15	54.0	-21.47	AV	217.00	150	Vertical	Pass
3	3645.000	52.52	-6.25	74.0	-21.48	Peak	32.00	150	Vertical	Pass
3**	3645.000	37.10	-6.25	54.0	-16.90	AV	32.00	150	Vertical	Pass
4	5537.000	96.31	-2.60	--	-106.69	Peak	203.00	150	Vertical	N/A
4**	5537.000	87.74	-2.60	--	87.74	AV	203.00	150	Vertical	N/A
5	7579.313	48.70	-2.47	74.0	-25.30	Peak	206.00	150	Vertical	Pass
5**	7579.313	32.90	-2.47	54.0	-21.10	AV	206.00	150	Vertical	Pass
6	11888.938	52.41	2.06	74.0	-21.59	Peak	275.00	150	Vertical	Pass
6**	11888.938	35.55	2.06	54.0	-18.45	AV	275.00	150	Vertical	Pass

11ac80, Band III, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.500	40.53	-17.36	74.0	-33.47	Peak	239.00	150	Horizontal	Pass
1**	1494.500	23.42	-17.36	54.0	-30.58	AV	239.00	150	Horizontal	Pass
2	2822.500	47.49	-9.94	74.0	-26.51	Peak	256.00	150	Horizontal	Pass
2**	2822.500	32.05	-9.94	54.0	-21.95	AV	256.00	150	Horizontal	Pass
3	3657.000	51.94	-6.75	74.0	-22.06	Peak	50.00	150	Horizontal	Pass
3**	3657.000	36.38	-6.75	54.0	-17.62	AV	50.00	150	Horizontal	Pass
4	5510.000	101.99	-2.21	--	-140.01	Peak	242.00	150	Horizontal	N/A
4**	5510.000	93.14	-2.21	--	93.14	AV	242.00	150	Horizontal	N/A
5	7570.687	50.47	-2.54	74.0	-23.53	Peak	180.00	150	Horizontal	Pass
5**	7570.687	32.53	-2.54	54.0	-21.47	AV	180.00	150	Horizontal	Pass
6	11909.063	53.22	1.92	74.0	-20.78	Peak	-1.00	150	Horizontal	Pass
6**	11909.063	35.87	1.92	54.0	-18.13	AV	-1.00	150	Horizontal	Pass

11ac80, Band III, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1524.000	40.26	-17.37	74.0	-33.74	Peak	149.00	150	Vertical	Pass
1**	1524.000	23.53	-17.37	54.0	-30.47	AV	149.00	150	Vertical	Pass
2	2800.000	49.08	-10.11	74.0	-24.92	Peak	44.00	150	Vertical	Pass
2**	2800.000	32.30	-10.11	54.0	-21.70	AV	44.00	150	Vertical	Pass
3	3646.000	51.99	-6.22	74.0	-22.01	Peak	212.00	150	Vertical	Pass
3**	3646.000	36.90	-6.22	54.0	-17.10	AV	212.00	150	Vertical	Pass
4	5589.000	95.03	-2.53	--	-44.97	Peak	140.00	150	Vertical	N/A
4**	5589.000	87.47	-2.53	--	87.47	AV	140.00	150	Vertical	N/A
5	8118.375	49.52	-1.86	74.0	-24.48	Peak	345.00	150	Vertical	Pass
5**	8118.375	32.84	-1.86	54.0	-21.16	AV	345.00	150	Vertical	Pass
6	11999.625	52.28	1.46	74.0	-21.72	Peak	39.00	150	Vertical	Pass
6**	11999.625	35.59	1.46	54.0	-18.41	AV	39.00	150	Vertical	Pass

11ac80, Band III, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1336.000	41.25	-17.13	74.0	-32.75	Peak	83.00	150	Horizontal	Pass
1**	1336.000	23.35	-17.13	54.0	-30.65	AV	83.00	150	Horizontal	Pass
2	2782.500	47.76	-10.00	74.0	-26.24	Peak	240.00	150	Horizontal	Pass
2**	2782.500	32.13	-10.00	54.0	-21.87	AV	240.00	150	Horizontal	Pass
3	3657.000	51.70	-6.75	74.0	-22.30	Peak	104.00	150	Horizontal	Pass
3**	3657.000	36.72	-6.75	54.0	-17.28	AV	104.00	150	Horizontal	Pass
4	5591.000	100.22	-2.48	--	-196.78	Peak	297.00	150	Horizontal	N/A
4**	5591.000	91.87	-2.48	--	91.87	AV	297.00	150	Horizontal	N/A
5	7480.125	50.61	-3.34	74.0	-23.39	Peak	242.00	150	Horizontal	Pass
5**	7480.125	33.04	-3.34	54.0	-20.96	AV	242.00	150	Horizontal	Pass
6	11654.625	52.69	0.28	74.0	-21.31	Peak	260.00	150	Horizontal	Pass
6**	11654.625	35.70	0.28	54.0	-18.30	AV	260.00	150	Horizontal	Pass

11a, Band IV, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1477.500	39.54	-17.35	74.0	-34.46	Peak	166.00	150	Vertical	Pass
1**	1477.500	23.52	-17.35	54.0	-30.48	AV	166.00	150	Vertical	Pass
2	2824.500	48.01	-10.29	74.0	-25.99	Peak	220.00	150	Vertical	Pass
2**	2824.500	31.82	-10.29	54.0	-22.18	AV	220.00	150	Vertical	Pass
3	3835.000	51.62	-5.10	74.0	-22.38	Peak	35.00	150	Vertical	Pass
3**	3835.000	35.61	-5.10	54.0	-18.39	AV	35.00	150	Vertical	Pass
4	5746.000	97.99	-2.25	--	-98.01	Peak	196.00	150	Vertical	N/A
4**	5746.000	90.02	-2.25	--	90.02	AV	196.00	150	Vertical	N/A
5	7557.750	49.03	-1.92	74.0	-24.97	Peak	292.00	150	Vertical	Pass
5**	7557.750	33.59	-1.92	54.0	-20.41	AV	292.00	150	Vertical	Pass
6	11635.937	52.75	0.03	74.0	-21.25	Peak	147.00	150	Vertical	Pass
6**	11635.937	35.44	0.03	54.0	-18.56	AV	147.00	150	Vertical	Pass

11a, Band IV, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.500	40.12	-17.06	74.0	-33.88	Peak	-1.00	150	Horizontal	Pass
1**	1361.500	23.63	-17.06	54.0	-30.37	AV	-1.00	150	Horizontal	Pass
2	2809.500	48.30	-9.97	74.0	-25.70	Peak	31.00	150	Horizontal	Pass
2**	2809.500	31.92	-9.97	54.0	-22.08	AV	31.00	150	Horizontal	Pass
3	4196.000	53.01	-4.90	74.0	-20.99	Peak	215.00	150	Horizontal	Pass
3**	4196.000	35.44	-4.90	54.0	-18.56	AV	215.00	150	Horizontal	Pass
4	5744.000	102.98	-2.39	--	14.98	Peak	88.00	150	Horizontal	N/A
4**	5744.000	95.30	-2.39	--	95.30	AV	88.00	150	Horizontal	N/A
5	8220.438	49.05	-1.46	74.0	-24.95	Peak	232.00	150	Horizontal	Pass
5**	8220.438	33.32	-1.46	54.0	-20.68	AV	232.00	150	Horizontal	Pass
6	12449.563	52.90	1.96	74.0	-21.10	Peak	269.00	150	Horizontal	Pass
6**	12449.563	36.23	1.96	54.0	-17.77	AV	269.00	150	Horizontal	Pass

11a, Band IV, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.000	40.10	-17.05	74.0	-33.90	Peak	304.00	150	Vertical	Pass
1**	1327.000	23.67	-17.05	54.0	-30.33	AV	304.00	150	Vertical	Pass
2	2799.000	48.96	-9.98	74.0	-25.04	Peak	285.00	150	Vertical	Pass
2**	2799.000	33.23	-9.98	54.0	-20.77	AV	285.00	150	Vertical	Pass
3	4132.000	51.59	-5.10	74.0	-22.41	Peak	114.00	150	Vertical	Pass
3**	4132.000	35.25	-5.10	54.0	-18.75	AV	114.00	150	Vertical	Pass
4	5787.000	98.57	-2.03	--	-15.43	Peak	114.00	150	Vertical	N/A
4**	5787.000	91.60	-2.03	--	91.60	AV	114.00	150	Vertical	N/A
5	8395.812	49.73	-0.80	74.0	-24.27	Peak	268.00	150	Vertical	Pass
5**	8395.812	33.05	-0.80	54.0	-20.95	AV	268.00	150	Vertical	Pass
6	12502.750	52.98	1.95	74.0	-21.02	Peak	192.00	150	Vertical	Pass
6**	12502.750	36.27	1.95	54.0	-17.73	AV	192.00	150	Vertical	Pass

11a, Band IV, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1388.500	39.84	-17.31	74.0	-34.16	Peak	216.00	150	Horizontal	Pass
1**	1388.500	23.32	-17.31	54.0	-30.68	AV	216.00	150	Horizontal	Pass
2	2787.500	48.75	-10.00	74.0	-25.25	Peak	14.00	150	Horizontal	Pass
2**	2787.500	32.56	-10.00	54.0	-21.44	AV	14.00	150	Horizontal	Pass
3	3635.000	52.35	-7.01	74.0	-21.65	Peak	73.00	150	Horizontal	Pass
3**	3635.000	35.97	-7.01	54.0	-18.03	AV	73.00	150	Horizontal	Pass
4	5781.000	103.03	-1.77	--	-135.97	Peak	239.00	150	Horizontal	N/A
4**	5781.000	95.41	-1.77	--	95.41	AV	239.00	150	Horizontal	N/A
5	8372.812	49.19	-1.08	74.0	-24.81	Peak	176.00	150	Horizontal	Pass
5**	8372.812	32.47	-1.08	54.0	-21.53	AV	176.00	150	Horizontal	Pass
6	12064.312	52.37	1.22	74.0	-21.63	Peak	120.00	150	Horizontal	Pass
6**	12064.312	36.23	1.22	54.0	-17.77	AV	120.00	150	Horizontal	Pass

11a, Band IV, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1517.000	40.42	-17.24	74.0	-33.58	Peak	97.00	150	Vertical	Pass
1**	1517.000	24.06	-17.24	54.0	-29.94	AV	97.00	150	Vertical	Pass
2	2800.000	47.86	-10.11	74.0	-26.14	Peak	4.00	150	Vertical	Pass
2**	2800.000	32.11	-10.11	54.0	-21.89	AV	4.00	150	Vertical	Pass
3	3818.000	52.14	-5.49	74.0	-21.86	Peak	227.00	150	Vertical	Pass
3**	3818.000	35.74	-5.49	54.0	-18.26	AV	227.00	150	Vertical	Pass
4	5827.000	98.96	-2.13	--	-34.04	Peak	133.00	150	Vertical	N/A
4**	5827.000	92.08	-2.13	--	92.08	AV	133.00	150	Vertical	N/A
5	7552.000	49.43	-2.05	74.0	-24.57	Peak	42.00	150	Vertical	Pass
5**	7552.000	32.92	-2.05	54.0	-21.08	AV	42.00	150	Vertical	Pass
6	11325.438	52.07	0.85	74.0	-21.93	Peak	23.00	150	Vertical	Pass
6**	11325.438	35.21	0.85	54.0	-18.79	AV	23.00	150	Vertical	Pass

11a, Band IV, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1582.500	40.75	-17.24	74.0	-33.25	Peak	342.00	150	Horizontal	Pass
1**	1582.500	24.02	-17.24	54.0	-29.98	AV	342.00	150	Horizontal	Pass
2	2853.000	47.86	-10.09	74.0	-26.14	Peak	227.00	150	Horizontal	Pass
2**	2853.000	31.65	-10.09	54.0	-22.35	AV	227.00	150	Horizontal	Pass
3	3654.000	52.64	-6.36	74.0	-21.36	Peak	19.00	150	Horizontal	Pass
3**	3654.000	36.51	-6.36	54.0	-17.49	AV	19.00	150	Horizontal	Pass
4	5824.000	104.99	-2.20	--	9.99	Peak	95.00	150	Horizontal	N/A
4**	5824.000	97.37	-2.20	--	97.37	AV	95.00	150	Horizontal	N/A
5	7576.437	48.57	-2.50	74.0	-25.43	Peak	302.00	150	Horizontal	Pass
5**	7576.437	32.57	-2.50	54.0	-21.43	AV	302.00	150	Horizontal	Pass
6	11858.750	52.48	1.50	74.0	-21.52	Peak	302.00	150	Horizontal	Pass
6**	11858.750	36.14	1.50	54.0	-17.86	AV	302.00	150	Horizontal	Pass

11n20, Band IV, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1569.000	40.33	-17.01	74.0	-33.67	Peak	128.00	150	Vertical	Pass
1**	1569.000	24.31	-17.01	54.0	-29.69	AV	128.00	150	Vertical	Pass
2	2742.500	48.46	-10.74	74.0	-25.54	Peak	32.00	150	Vertical	Pass
2**	2742.500	31.75	-10.74	54.0	-22.25	AV	32.00	150	Vertical	Pass
3	3652.000	52.37	-6.35	74.0	-21.63	Peak	215.00	150	Vertical	Pass
3**	3652.000	36.72	-6.35	54.0	-17.28	AV	215.00	150	Vertical	Pass
4	5744.000	99.86	-2.39	--	-95.14	Peak	195.00	150	Vertical	N/A
4**	5744.000	90.40	-2.39	--	90.40	AV	195.00	150	Vertical	N/A
5	7557.750	49.76	-1.92	74.0	-24.24	Peak	360.00	150	Vertical	Pass
5**	7557.750	33.81	-1.92	54.0	-20.19	AV	360.00	150	Vertical	Pass
6	11901.875	52.44	2.17	74.0	-21.56	Peak	245.00	150	Vertical	Pass
6**	11901.875	36.23	2.17	54.0	-17.77	AV	245.00	150	Vertical	Pass

11n20, Band IV, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1378.000	41.37	-17.20	74.0	-32.63	Peak	360.00	150	Horizontal	Pass
1**	1378.000	23.21	-17.20	54.0	-30.79	AV	360.00	150	Horizontal	Pass
2	2815.500	47.69	-10.02	74.0	-26.31	Peak	188.00	150	Horizontal	Pass
2**	2815.500	32.15	-10.02	54.0	-21.85	AV	188.00	150	Horizontal	Pass
3	3950.000	52.34	-4.75	74.0	-21.66	Peak	361.00	150	Horizontal	Pass
3**	3950.000	35.57	-4.75	54.0	-18.43	AV	361.00	150	Horizontal	Pass
4	5741.000	104.07	-2.24	--	7.07	Peak	97.00	150	Horizontal	N/A
4**	5741.000	94.00	-2.24	--	94.00	AV	97.00	150	Horizontal	N/A
5	7306.187	49.88	-3.55	74.0	-24.12	Peak	190.00	150	Horizontal	Pass
5**	7306.187	32.52	-3.55	54.0	-21.48	AV	190.00	150	Horizontal	Pass
6	12285.688	52.43	2.07	74.0	-21.57	Peak	75.00	150	Horizontal	Pass
6**	12285.688	36.33	2.07	54.0	-17.67	AV	75.00	150	Horizontal	Pass

11n20, Band IV, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1544.500	41.24	-17.32	74.0	-32.76	Peak	281.00	150	Vertical	Pass
1**	1544.500	23.69	-17.32	54.0	-30.31	AV	281.00	150	Vertical	Pass
2	2795.000	48.09	-10.25	74.0	-25.91	Peak	281.00	150	Vertical	Pass
2**	2795.000	32.24	-10.25	54.0	-21.76	AV	281.00	150	Vertical	Pass
3	3685.000	52.85	-6.45	74.0	-21.15	Peak	315.00	150	Vertical	Pass
3**	3685.000	36.13	-6.45	54.0	-17.87	AV	315.00	150	Vertical	Pass
4	5784.000	100.03	-2.20	--	0.03	Peak	100.00	150	Vertical	N/A
4**	5784.000	90.62	-2.20	--	90.62	AV	100.00	150	Vertical	N/A
5	7534.750	48.83	-2.49	74.0	-25.17	Peak	-1.00	150	Vertical	Pass
5**	7534.750	32.96	-2.49	54.0	-21.04	AV	-1.00	150	Vertical	Pass
6	12442.375	53.02	1.90	74.0	-20.98	Peak	304.00	150	Vertical	Pass
6**	12442.375	36.64	1.90	54.0	-17.36	AV	304.00	150	Vertical	Pass

11n20, Band IV, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.500	39.66	-17.06	74.0	-34.34	Peak	359.00	150	Horizontal	Pass
1**	1361.500	23.67	-17.06	54.0	-30.33	AV	359.00	150	Horizontal	Pass
2	2785.000	48.38	-10.06	74.0	-25.62	Peak	181.00	150	Horizontal	Pass
2**	2785.000	32.51	-10.06	54.0	-21.49	AV	181.00	150	Horizontal	Pass
3	4018.000	52.21	-5.24	74.0	-21.79	Peak	159.00	150	Horizontal	Pass
3**	4018.000	35.03	-5.24	54.0	-18.97	AV	159.00	150	Horizontal	Pass
4	5784.000	104.73	-2.20	--	-153.27	Peak	258.00	150	Horizontal	N/A
4**	5784.000	95.75	-2.20	--	95.75	AV	258.00	150	Horizontal	N/A
5	7635.375	49.45	-2.79	74.0	-24.55	Peak	41.00	150	Horizontal	Pass
5**	7635.375	32.92	-2.79	54.0	-21.08	AV	41.00	150	Horizontal	Pass
6	11904.750	52.72	2.05	74.0	-21.28	Peak	21.00	150	Horizontal	Pass
6**	11904.750	36.04	2.05	54.0	-17.96	AV	21.00	150	Horizontal	Pass

11n20, Band IV, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.000	39.88	-17.01	74.0	-34.12	Peak	-1.00	150	Vertical	Pass
1**	1332.000	24.16	-17.01	54.0	-29.84	AV	-1.00	150	Vertical	Pass
2	2778.500	47.76	-10.10	74.0	-26.24	Peak	277.00	150	Vertical	Pass
2**	2778.500	32.95	-10.10	54.0	-21.05	AV	277.00	150	Vertical	Pass
3	3646.000	51.86	-6.22	74.0	-22.14	Peak	81.00	150	Vertical	Pass
3**	3646.000	36.68	-6.22	54.0	-17.32	AV	81.00	150	Vertical	Pass
4	5826.000	98.45	-2.22	--	-23.55	Peak	122.00	150	Vertical	N/A
4**	5826.000	90.30	-2.22	--	90.30	AV	122.00	150	Vertical	N/A
5	7560.625	49.20	-1.97	74.0	-24.80	Peak	-1.00	150	Vertical	Pass
5**	7560.625	33.00	-1.97	54.0	-21.00	AV	-1.00	150	Vertical	Pass
6	11450.500	53.25	0.30	74.0	-20.75	Peak	75.00	150	Vertical	Pass
6**	11450.500	35.47	0.30	54.0	-18.53	AV	75.00	150	Vertical	Pass

11n20, Band IV, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1459.500	39.87	-17.23	74.0	-34.13	Peak	299.00	150	Horizontal	Pass
1**	1459.500	23.67	-17.23	54.0	-30.33	AV	299.00	150	Horizontal	Pass
2	2767.500	48.35	-10.25	74.0	-25.65	Peak	81.00	150	Horizontal	Pass
2**	2767.500	31.87	-10.25	54.0	-22.13	AV	81.00	150	Horizontal	Pass
3	3970.000	52.94	-5.40	74.0	-21.06	Peak	221.00	150	Horizontal	Pass
3**	3970.000	35.68	-5.40	54.0	-18.32	AV	221.00	150	Horizontal	Pass
4	5824.000	106.68	-2.20	--	24.68	Peak	82.00	150	Horizontal	N/A
4**	5824.000	96.86	-2.20	--	96.86	AV	82.00	150	Horizontal	N/A
5	7587.937	48.95	-2.65	74.0	-25.05	Peak	259.00	150	Horizontal	Pass
5**	7587.937	33.26	-2.65	54.0	-20.74	AV	259.00	150	Horizontal	Pass
6	12064.312	52.48	1.22	74.0	-21.52	Peak	239.00	150	Horizontal	Pass
6**	12064.312	35.89	1.22	54.0	-18.11	AV	239.00	150	Horizontal	Pass

11n40, Band IV, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1550.000	40.14	-17.35	74.0	-33.86	Peak	339.00	150	Vertical	Pass
1**	1550.000	23.60	-17.35	54.0	-30.40	AV	339.00	150	Vertical	Pass
2	2823.000	47.74	-10.05	74.0	-26.26	Peak	175.00	150	Vertical	Pass
2**	2823.000	31.83	-10.05	54.0	-22.17	AV	175.00	150	Vertical	Pass
3	3642.000	51.94	-6.74	74.0	-22.06	Peak	1.00	150	Vertical	Pass
3**	3642.000	36.57	-6.74	54.0	-17.43	AV	1.00	150	Vertical	Pass
4	5757.000	96.28	-2.00	--	-68.72	Peak	165.00	150	Vertical	N/A
4**	5757.000	88.08	-2.00	--	88.08	AV	165.00	150	Vertical	N/A
5	8106.875	49.54	-1.81	74.0	-24.46	Peak	136.00	150	Vertical	Pass
5**	8106.875	33.91	-1.81	54.0	-20.09	AV	136.00	150	Vertical	Pass
6	12446.687	52.71	1.92	74.0	-21.29	Peak	319.00	150	Vertical	Pass
6**	12446.687	36.11	1.92	54.0	-17.89	AV	319.00	150	Vertical	Pass

11n40, Band IV, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1386.000	39.55	-17.21	74.0	-34.45	Peak	134.00	150	Horizontal	Pass
1**	1386.000	23.37	-17.21	54.0	-30.63	AV	134.00	150	Horizontal	Pass
2	2796.000	47.71	-10.24	74.0	-26.29	Peak	51.00	150	Horizontal	Pass
2**	2796.000	32.33	-10.24	54.0	-21.67	AV	51.00	150	Horizontal	Pass
3	4175.000	51.74	-5.29	74.0	-22.26	Peak	83.00	150	Horizontal	Pass
3**	4175.000	35.21	-5.29	54.0	-18.79	AV	83.00	150	Horizontal	Pass
4	5760.000	101.84	-1.88	--	18.84	Peak	83.00	150	Horizontal	N/A
4**	5760.000	93.52	-1.88	--	93.52	AV	83.00	150	Horizontal	N/A
5	7557.750	49.17	-1.92	74.0	-24.83	Peak	131.00	150	Horizontal	Pass
5**	7557.750	33.45	-1.92	54.0	-20.55	AV	131.00	150	Horizontal	Pass
6	11740.875	52.68	1.20	74.0	-21.32	Peak	276.00	150	Horizontal	Pass
6**	11740.875	35.15	1.20	54.0	-18.85	AV	276.00	150	Horizontal	Pass

11n40, Band IV, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1480.000	39.68	-17.24	74.0	-34.32	Peak	278.00	150	Vertical	Pass
1**	1480.000	23.70	-17.24	54.0	-30.30	AV	278.00	150	Vertical	Pass
2	2835.000	47.68	-9.93	74.0	-26.32	Peak	298.00	150	Vertical	Pass
2**	2835.000	31.89	-9.93	54.0	-22.11	AV	298.00	150	Vertical	Pass
3	3715.000	51.35	-6.58	74.0	-22.65	Peak	150.00	150	Vertical	Pass
3**	3715.000	35.25	-6.58	54.0	-18.75	AV	150.00	150	Vertical	Pass
4	5792.000	96.45	-2.34	--	-11.55	Peak	108.00	150	Vertical	Pass
4**	5792.000	88.37	-2.34	--	88.37	AV	108.00	150	Vertical	N/A
5	7618.125	48.84	-2.69	74.0	-25.16	Peak	273.00	150	Vertical	Pass
5**	7618.125	33.33	-2.69	54.0	-20.67	AV	273.00	150	Vertical	Pass
6	12281.375	52.84	2.09	74.0	-21.16	Peak	83.00	150	Vertical	Pass
6**	12281.375	36.12	2.09	54.0	-17.88	AV	83.00	150	Vertical	Pass

11n40, Band IV, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1381.000	40.40	-17.33	74.0	-33.60	Peak	130.00	150	Horizontal	Pass
1**	1381.000	23.14	-17.33	54.0	-30.86	AV	130.00	150	Horizontal	Pass
2	2799.000	47.71	-9.98	74.0	-26.29	Peak	89.00	150	Horizontal	Pass
2**	2799.000	32.18	-9.98	54.0	-21.82	AV	89.00	150	Horizontal	Pass
3	4034.000	52.83	-5.04	74.0	-21.17	Peak	352.00	150	Horizontal	Pass
3**	4034.000	35.63	-5.04	54.0	-18.37	AV	352.00	150	Horizontal	Pass
4	5800.000	102.38	-2.26	--	19.38	Peak	83.00	150	Horizontal	N/A
4**	5800.000	93.81	-2.26	--	93.81	AV	83.00	150	Horizontal	N/A
5	7554.875	49.05	-1.66	74.0	-24.95	Peak	301.00	150	Horizontal	Pass
5**	7554.875	33.63	-1.66	54.0	-20.37	AV	301.00	150	Horizontal	Pass
6	11897.562	52.16	2.22	74.0	-21.84	Peak	260.00	150	Horizontal	Pass
6**	11897.562	37.11	2.22	54.0	-16.89	AV	260.00	150	Horizontal	Pass

11ac20, Band IV, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1519.500	39.83	-17.46	74.0	-34.17	Peak	208.00	150	Vertical	Pass
1**	1519.500	23.02	-17.46	54.0	-30.98	AV	208.00	150	Vertical	Pass
2	2782.500	48.33	-10.00	74.0	-25.67	Peak	360.00	150	Vertical	Pass
2**	2782.500	32.41	-10.00	54.0	-21.59	AV	360.00	150	Vertical	Pass
3	3961.000	52.10	-4.85	74.0	-21.90	Peak	-1.00	150	Vertical	Pass
3**	3961.000	35.69	-4.85	54.0	-18.31	AV	-1.00	150	Vertical	Pass
4	5744.000	100.00	-2.39	--	-93.00	Peak	193.00	150	Vertical	N/A
4**	5744.000	90.24	-2.39	--	90.24	AV	193.00	150	Vertical	N/A
5	7554.875	48.95	-1.66	74.0	-25.05	Peak	59.00	150	Vertical	Pass
5**	7554.875	33.65	-1.66	54.0	-20.35	AV	59.00	150	Vertical	Pass
6	12403.562	52.39	1.67	74.0	-21.61	Peak	315.00	150	Vertical	Pass
6**	12403.562	36.15	1.67	54.0	-17.85	AV	315.00	150	Vertical	Pass

11ac20, Band IV, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1572.500	40.25	-16.95	74.0	-33.75	Peak	255.00	150	Horizontal	Pass
1**	1572.500	23.75	-16.95	54.0	-30.25	AV	255.00	150	Horizontal	Pass
2	2757.000	48.46	-10.56	74.0	-25.54	Peak	3.00	150	Horizontal	Pass
2**	2757.000	31.92	-10.56	54.0	-22.08	AV	3.00	150	Horizontal	Pass
3	3643.000	52.78	-6.59	74.0	-21.22	Peak	217.00	150	Horizontal	Pass
3**	3643.000	36.63	-6.59	54.0	-17.37	AV	217.00	150	Horizontal	Pass
4	5746.000	103.25	-2.25	--	-134.75	Peak	238.00	150	Horizontal	N/A
4**	5746.000	94.57	-2.25	--	94.57	AV	238.00	150	Horizontal	N/A
5	7546.250	49.16	-2.22	74.0	-24.84	Peak	358.00	150	Horizontal	Pass
5**	7546.250	33.61	-2.22	54.0	-20.39	AV	358.00	150	Horizontal	Pass
6	12485.500	52.79	1.84	74.0	-21.21	Peak	336.00	150	Horizontal	Pass
6**	12485.500	35.92	1.84	54.0	-18.08	AV	336.00	150	Horizontal	Pass

11ac20, Band IV, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1537.000	39.60	-17.34	74.0	-34.40	Peak	77.00	150	Vertical	Pass
1**	1537.000	23.17	-17.34	54.0	-30.83	AV	77.00	150	Vertical	Pass
2	2811.500	47.62	-9.99	74.0	-26.38	Peak	249.00	150	Vertical	Pass
2**	2811.500	32.36	-9.99	54.0	-21.64	AV	249.00	150	Vertical	Pass
3	3681.000	51.68	-6.57	74.0	-22.32	Peak	264.00	150	Vertical	Pass
3**	3681.000	36.14	-6.57	54.0	-17.86	AV	264.00	150	Vertical	Pass
4	5784.000	99.91	-2.20	--	-164.09	Peak	264.00	150	Vertical	N/A
4**	5784.000	90.33	-2.20	--	90.33	AV	264.00	150	Vertical	N/A
5	7644.000	49.10	-2.92	74.0	-24.90	Peak	247.00	150	Vertical	Pass
5**	7644.000	32.80	-2.92	54.0	-21.20	AV	247.00	150	Vertical	Pass
6	12271.313	52.29	1.73	74.0	-21.71	Peak	94.00	150	Vertical	Pass
6**	12271.313	36.55	1.73	54.0	-17.45	AV	94.00	150	Vertical	Pass

11ac20, Band IV, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1570.500	40.60	-17.07	74.0	-33.40	Peak	250.00	150	Horizontal	Pass
1**	1570.500	24.20	-17.07	54.0	-29.80	AV	250.00	150	Horizontal	Pass
2	2772.500	47.73	-10.36	74.0	-26.27	Peak	293.00	150	Horizontal	Pass
2**	2772.500	32.09	-10.36	54.0	-21.91	AV	293.00	150	Horizontal	Pass
3	3645.000	52.46	-6.25	74.0	-21.54	Peak	282.00	150	Horizontal	Pass
3**	3645.000	36.69	-6.25	54.0	-17.31	AV	282.00	150	Horizontal	Pass
4	5786.000	104.38	-2.08	--	-134.62	Peak	239.00	150	Horizontal	N/A
4**	5786.000	94.80	-2.08	--	94.80	AV	239.00	150	Horizontal	N/A
5	7550.562	49.17	-1.85	74.0	-24.83	Peak	206.00	150	Horizontal	Pass
5**	7550.562	33.01	-1.85	54.0	-20.99	AV	206.00	150	Horizontal	Pass
6	11943.562	52.49	1.69	74.0	-21.51	Peak	34.00	150	Horizontal	Pass
6**	11943.562	36.12	1.69	54.0	-17.88	AV	34.00	150	Horizontal	Pass

11ac20, Band IV, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.000	39.73	-17.00	74.0	-34.27	Peak	96.00	150	Vertical	Pass
1**	1361.000	24.23	-17.00	54.0	-29.77	AV	96.00	150	Vertical	Pass
2	2745.500	47.64	-10.60	74.0	-26.36	Peak	182.00	150	Vertical	Pass
2**	2745.500	31.40	-10.60	54.0	-22.60	AV	182.00	150	Vertical	Pass
3	4022.000	52.01	-5.11	74.0	-21.99	Peak	143.00	150	Vertical	Pass
3**	4022.000	35.59	-5.11	54.0	-18.41	AV	143.00	150	Vertical	Pass
4	5827.000	100.39	-2.13	--	-23.61	Peak	124.00	150	Vertical	N/A
4**	5827.000	91.73	-2.13	--	91.73	AV	124.00	150	Vertical	N/A
5	7438.437	48.97	-3.21	74.0	-25.03	Peak	357.00	150	Vertical	Pass
5**	7438.437	32.92	-3.21	54.0	-21.08	AV	357.00	150	Vertical	Pass
6	12274.187	52.40	1.84	74.0	-21.60	Peak	48.00	150	Vertical	Pass
6**	12274.187	37.17	1.84	54.0	-16.83	AV	48.00	150	Vertical	Pass

11ac20, Band IV, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1523.000	39.59	-17.41	74.0	-34.41	Peak	289.00	150	Horizontal	Pass
1**	1523.000	23.09	-17.41	54.0	-30.91	AV	289.00	150	Horizontal	Pass
2	2808.000	47.65	-10.01	74.0	-26.35	Peak	196.00	150	Horizontal	Pass
2**	2808.000	32.36	-10.01	54.0	-21.64	AV	196.00	150	Horizontal	Pass
3	3697.000	53.12	-6.05	74.0	-20.88	Peak	247.00	150	Horizontal	Pass
3**	3697.000	36.43	-6.05	54.0	-17.57	AV	247.00	150	Horizontal	Pass
4	5824.000	106.00	-2.20	--	-141.00	Peak	247.00	150	Horizontal	N/A
4**	5824.000	97.16	-2.20	--	97.16	AV	247.00	150	Horizontal	N/A
5	8138.500	49.47	-2.02	74.0	-24.53	Peak	224.00	150	Horizontal	Pass
5**	8138.500	32.68	-2.02	54.0	-21.32	AV	224.00	150	Horizontal	Pass
6	12308.688	52.90	1.70	74.0	-21.10	Peak	136.00	150	Horizontal	Pass
6**	12308.688	36.15	1.70	54.0	-17.85	AV	136.00	150	Horizontal	Pass

11ac40, Band IV, 1 GHz to 18 GHz, Low channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1553.000	39.74	-17.32	74.0	-34.26	Peak	65.00	150	Vertical	Pass
1**	1553.000	23.85	-17.32	54.0	-30.15	AV	65.00	150	Vertical	Pass
2	2833.500	47.52	-9.96	74.0	-26.48	Peak	132.00	150	Vertical	Pass
2**	2833.500	32.19	-9.96	54.0	-21.81	AV	132.00	150	Vertical	Pass
3	3655.000	54.21	-6.42	74.0	-19.79	Peak	339.00	150	Vertical	Pass
3**	3655.000	36.48	-6.42	54.0	-17.52	AV	339.00	150	Vertical	Pass
4	5751.000	96.49	-2.09	--	-108.51	Peak	205.00	150	Vertical	N/A
4**	5751.000	88.85	-2.09	--	88.85	AV	205.00	150	Vertical	N/A
5	7554.875	49.27	-1.66	74.0	-24.73	Peak	113.00	150	Vertical	Pass
5**	7554.875	33.33	-1.66	54.0	-20.67	AV	113.00	150	Vertical	Pass
6	12479.750	52.99	1.78	74.0	-21.01	Peak	113.00	150	Vertical	Pass
6**	12479.750	36.34	1.78	54.0	-17.66	AV	113.00	150	Vertical	Pass

11ac40, Band IV, 1 GHz to 18 GHz, Low channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1504.000	40.40	-17.45	74.0	-33.60	Peak	96.00	150	Horizontal	Pass
1**	1504.000	23.60	-17.45	54.0	-30.40	AV	96.00	150	Horizontal	Pass
2	2783.500	47.98	-9.98	74.0	-26.02	Peak	1.00	150	Horizontal	Pass
2**	2783.500	32.68	-9.98	54.0	-21.32	AV	1.00	150	Horizontal	Pass
3	3691.000	52.35	-6.08	74.0	-21.65	Peak	137.00	150	Horizontal	Pass
3**	3691.000	36.19	-6.08	54.0	-17.81	AV	137.00	150	Horizontal	Pass
4	5760.000	100.98	-1.88	--	7.98	Peak	93.00	150	Horizontal	N/A
4**	5760.000	92.77	-1.88	--	92.77	AV	93.00	150	Horizontal	N/A
5	7506.000	49.01	-2.76	74.0	-24.99	Peak	178.00	150	Horizontal	Pass
5**	7506.000	32.61	-2.76	54.0	-21.39	AV	178.00	150	Horizontal	Pass
6	11464.875	52.24	0.16	74.0	-21.76	Peak	335.00	150	Horizontal	Pass
6**	11464.875	35.43	0.16	54.0	-18.57	AV	335.00	150	Horizontal	Pass

11ac40, Band IV, 1 GHz to 18 GHz, High channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.500	39.21	-17.17	74.0	-34.79	Peak	-1.00	150	Vertical	Pass
1**	1500.500	24.13	-17.17	54.0	-29.87	AV	-1.00	150	Vertical	Pass
2	2810.500	48.38	-9.98	74.0	-25.62	Peak	152.00	150	Vertical	Pass
2**	2810.500	32.39	-9.98	54.0	-21.61	AV	152.00	150	Vertical	Pass
3	3697.000	52.19	-6.05	74.0	-21.81	Peak	4.00	150	Vertical	Pass
3**	3697.000	36.68	-6.05	54.0	-17.32	AV	4.00	150	Vertical	Pass
4	5803.000	95.94	-2.35	--	-23.06	Peak	119.00	150	Vertical	N/A
4**	5803.000	88.80	-2.35	--	88.80	AV	119.00	150	Vertical	N/A
5	7554.875	49.50	-1.66	74.0	-24.50	Peak	81.00	150	Vertical	Pass
5**	7554.875	33.37	-1.66	54.0	-20.63	AV	81.00	150	Vertical	Pass
6	11970.875	53.32	1.00	74.0	-20.68	Peak	150.00	150	Vertical	Pass
6**	11970.875	36.45	1.00	54.0	-17.55	AV	150.00	150	Vertical	Pass

11ac40, Band IV, 1 GHz to 18 GHz, High channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1525.000	39.63	-17.45	74.0	-34.37	Peak	127.00	150	Horizontal	Pass
1**	1525.000	23.27	-17.45	54.0	-30.73	AV	127.00	150	Horizontal	Pass
2	2794.500	47.97	-10.25	74.0	-26.03	Peak	-1.00	150	Horizontal	Pass
2**	2794.500	31.98	-10.25	54.0	-22.02	AV	-1.00	150	Horizontal	Pass
3	3652.000	51.98	-6.35	74.0	-22.02	Peak	234.00	150	Horizontal	Pass
3**	3652.000	36.38	-6.35	54.0	-17.62	AV	234.00	150	Horizontal	Pass
4	5797.000	102.11	-2.15	--	6.11	Peak	96.00	150	Horizontal	N/A
4**	5797.000	93.98	-2.15	--	93.98	AV	96.00	150	Horizontal	N/A
5	8275.062	49.24	-1.53	74.0	-24.76	Peak	171.00	150	Horizontal	Pass
5**	8275.062	32.67	-1.53	54.0	-21.33	AV	171.00	150	Horizontal	Pass
6	12215.250	52.24	1.58	74.0	-21.76	Peak	103.00	150	Horizontal	Pass
6**	12215.250	36.11	1.58	54.0	-17.89	AV	103.00	150	Horizontal	Pass

11ac80, Band IV, 1 GHz to 18 GHz, Middle channel, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1369.500	39.73	-17.13	74.0	-34.27	Peak	54.00	150	Vertical	Pass
1**	1369.500	23.18	-17.13	54.0	-30.82	AV	54.00	150	Vertical	Pass
2	2789.000	48.22	-10.14	74.0	-25.78	Peak	-1.00	150	Vertical	Pass
2**	2789.000	32.09	-10.14	54.0	-21.91	AV	-1.00	150	Vertical	Pass
3	3640.000	52.39	-6.85	74.0	-21.61	Peak	353.00	150	Vertical	Pass
3**	3640.000	36.13	-6.85	54.0	-17.87	AV	353.00	150	Vertical	Pass
4	5755.000	95.33	-2.14	--	-95.67	Peak	191.00	150	Vertical	N/A
4**	5755.000	84.77	-2.14	--	84.77	AV	191.00	150	Vertical	N/A
5	7513.187	49.15	-2.66	74.0	-24.85	Peak	122.00	150	Vertical	Pass
5**	7513.187	32.54	-2.66	54.0	-21.46	AV	122.00	150	Vertical	Pass
6	12285.688	53.49	2.07	74.0	-20.51	Peak	333.00	150	Vertical	Pass
6**	12285.688	37.30	2.07	54.0	-16.70	AV	333.00	150	Vertical	Pass

11ac80, Band IV, 1 GHz to 18 GHz, Middle channel, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1533.000	40.00	-17.32	74.0	-34.00	Peak	29.00	150	Horizontal	Pass
1**	1533.000	23.31	-17.32	54.0	-30.69	AV	29.00	150	Horizontal	Pass
2	2740.500	47.47	-10.79	74.0	-26.53	Peak	212.00	150	Horizontal	Pass
2**	2740.500	31.28	-10.79	54.0	-22.72	AV	212.00	150	Horizontal	Pass
3	3663.000	51.74	-6.86	74.0	-22.26	Peak	258.00	150	Horizontal	Pass
3**	3663.000	36.22	-6.86	54.0	-17.78	AV	258.00	150	Horizontal	Pass
4	5774.000	98.55	-1.78	--	-136.45	Peak	235.00	150	Horizontal	N/A
4**	5774.000	91.04	-1.78	--	91.04	AV	235.00	150	Horizontal	N/A
5	7493.063	49.60	-3.20	74.0	-24.40	Peak	356.00	150	Horizontal	Pass
5**	7493.063	32.68	-3.20	54.0	-21.32	AV	356.00	150	Horizontal	Pass
6	12246.875	52.91	1.27	74.0	-21.09	Peak	217.00	150	Horizontal	Pass
6**	12246.875	35.76	1.27	54.0	-18.24	AV	217.00	150	Horizontal	Pass

A.7.2 Band Edge (Restricted-band)

Test Band	Mode	Channel	Verdict
Band I	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
	802.11ac(VHT80)	Middle	Pass
Band II	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
	802.11ac(VHT80)	Middle	Pass
Band III	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
	802.11ac(VHT80)	Low	Pass
		High	Pass


Band IV	802.11a	Low	Pass
		High	Pass
	802.11n(HT20)	Low	Pass
		High	Pass
	802.11n(HT40)	Low	Pass
		High	Pass
	802.11ac(VHT20)	Low	Pass
		High	Pass
	802.11ac(VHT40)	Low	Pass
		High	Pass
	802.11ac(VHT80)	Middle	Pass

Test Plots

Band I 11a CH36 Peak



Band I 11a CH36 AV

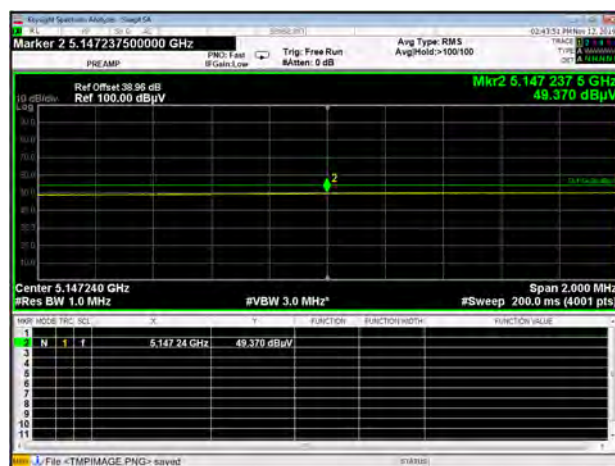


Band I 11a CH48 Peak




Band I 11n20 CH36 Peak




Band I 11n20 CH36 AV

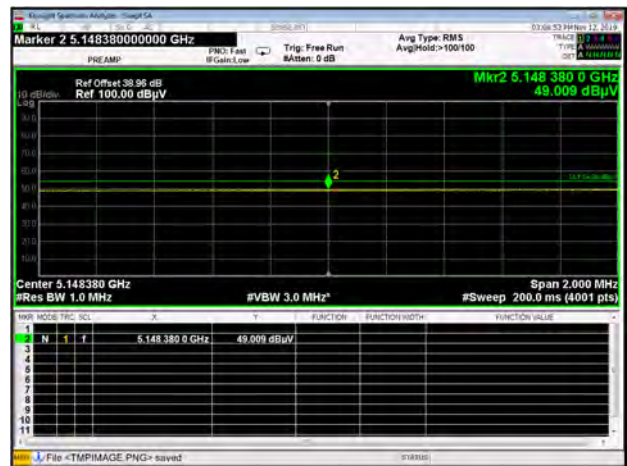

Band I 11n20 CH48 Peak

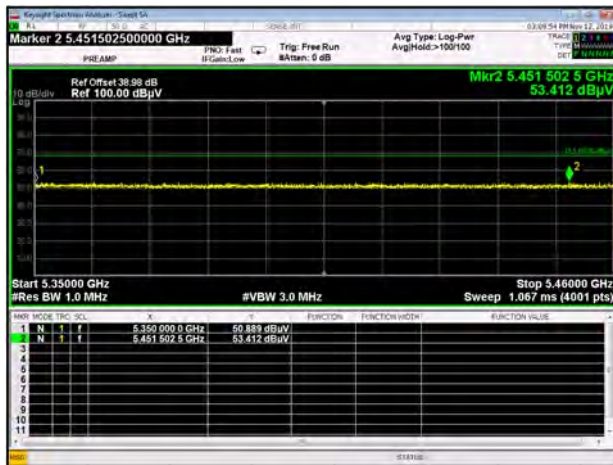

Band I 11n40 CH38 Peak

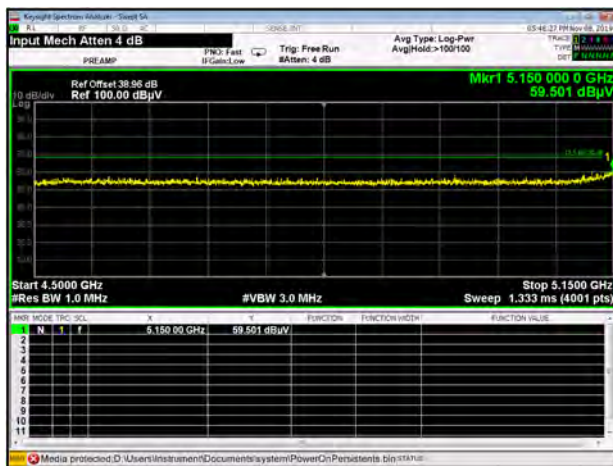


Band I 11n40 CH38 AV



Band I 11n40 CH46 Peak



Band I 11n40 CH46 AV

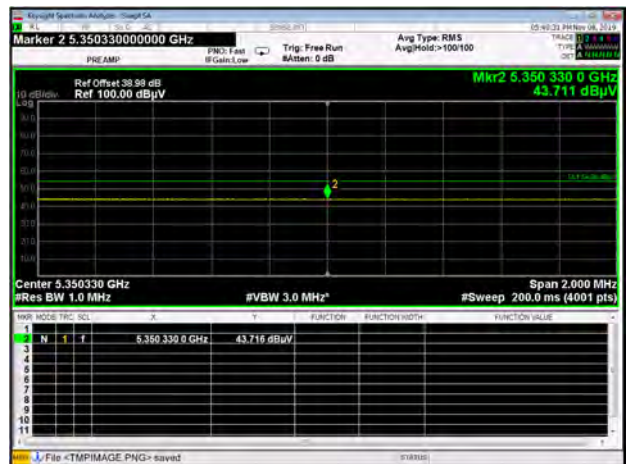

Band I 11ac20 CH36 Peak




Band I 11ac20 CH36 AV




Band I 11ac20 CH48 Peak




Band I 11ac40 CH38 Peak

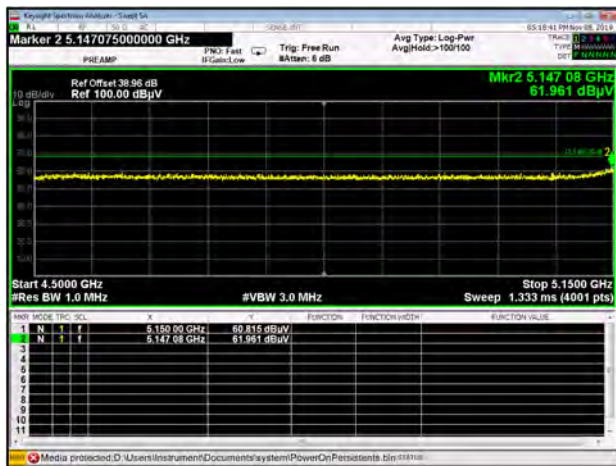


Band I 11ac40 CH38 AV

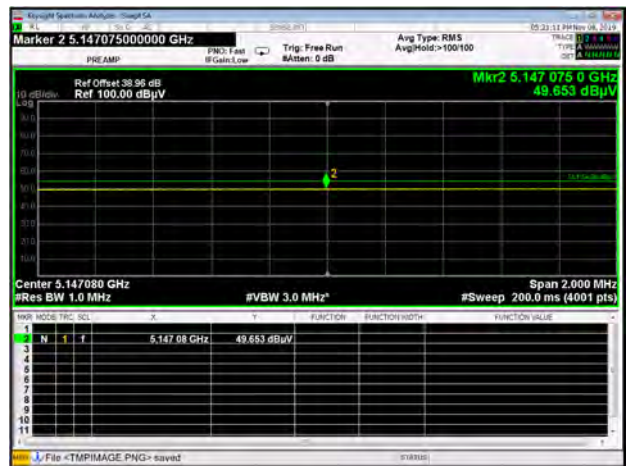


Band I 11ac40 CH46 Peak

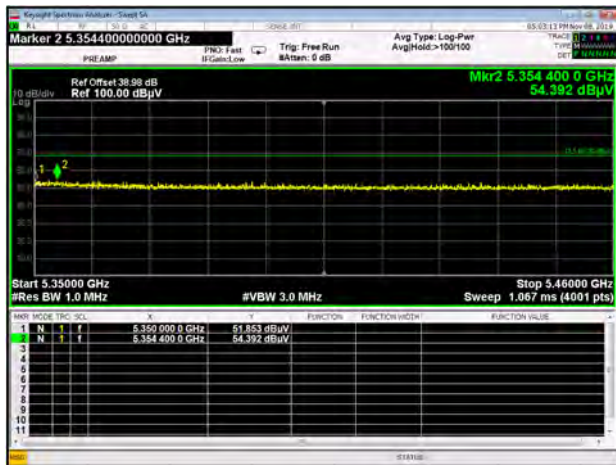


Band I 11ac40 CH46 AV

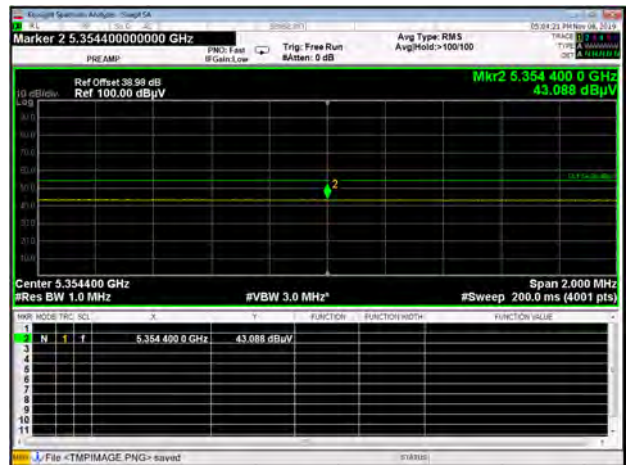


Band I 11ac80 CH42 Peak

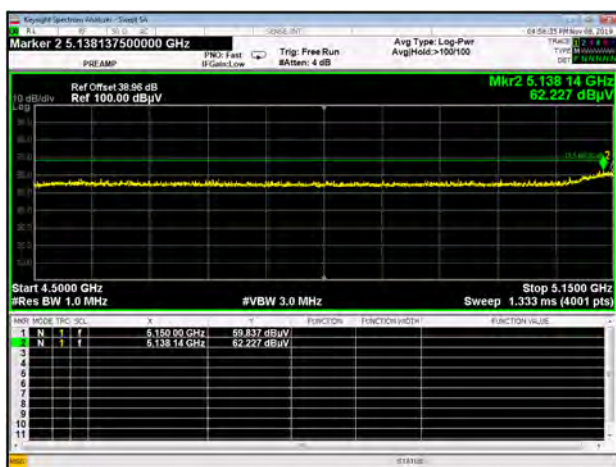

Band I 11ac80 CH42 AV

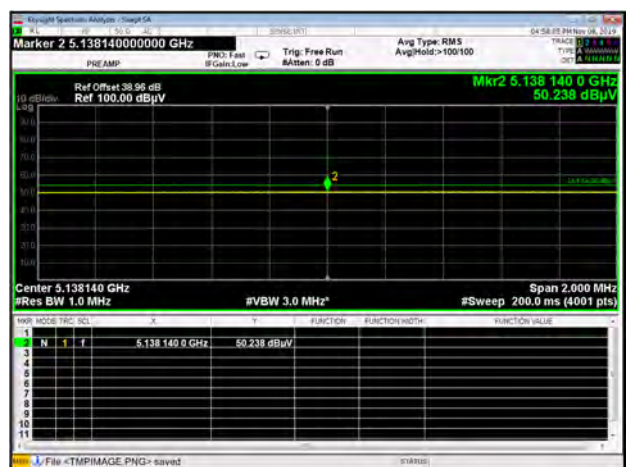

Band I 11ac80 CH42 Peak

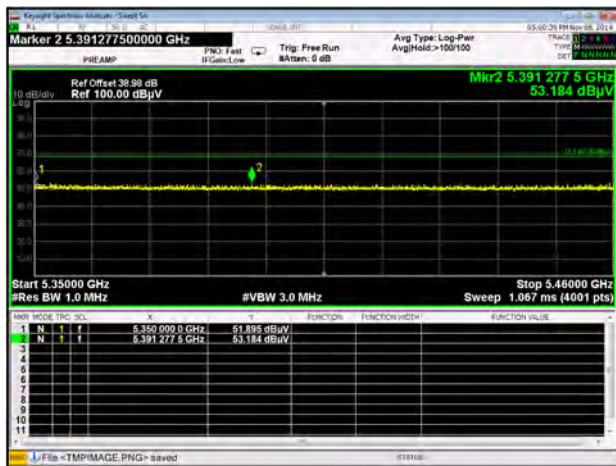


Band II 11a CH52 Peak




Band II 11a CH64 Peak



Band II 11a CH64 AV

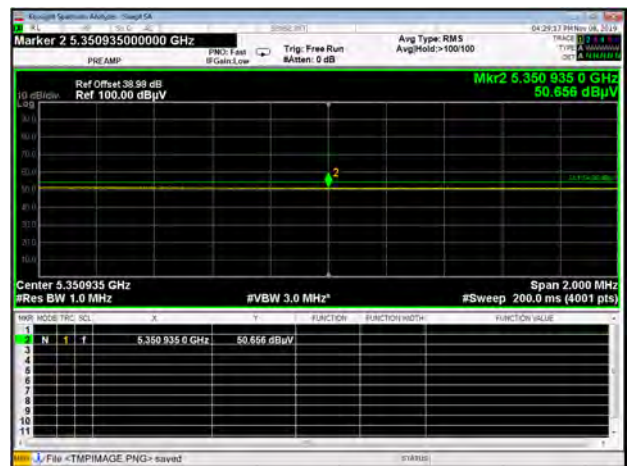

Band II 11n20 CH52 Peak

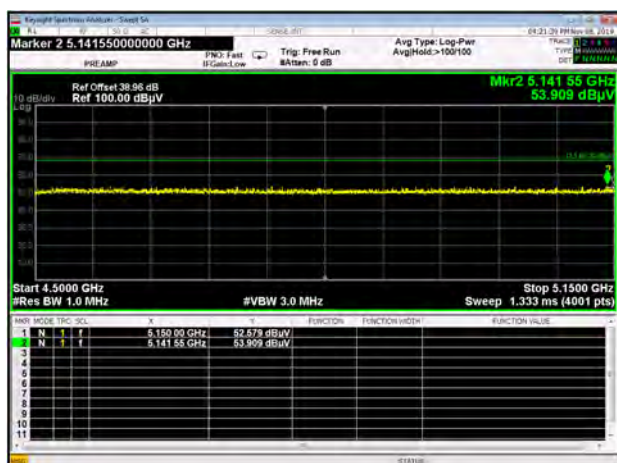

Band II 11n20 CH64 Peak




Band II 11n20 CH64 AV




Band II 11n40 CH54 Peak




Band II 11n40 CH62 Peak

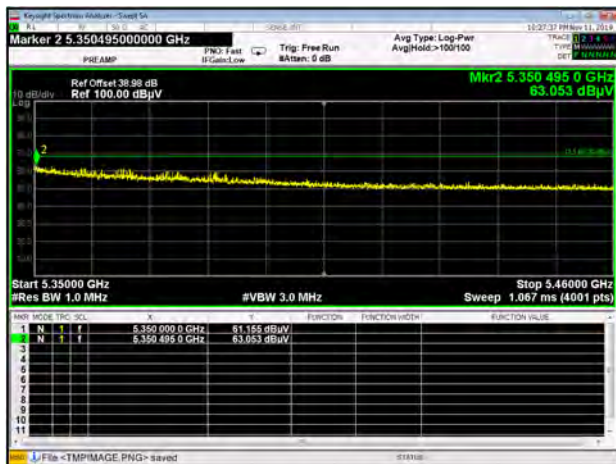

Band II 11n40 CH62 AV

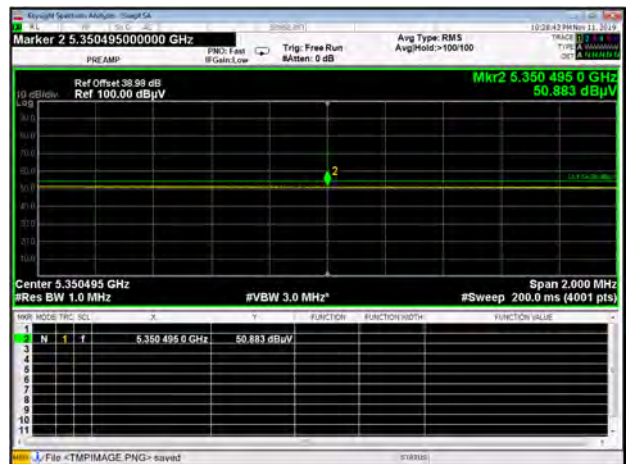

Band II 11ac20 CH52 Peak

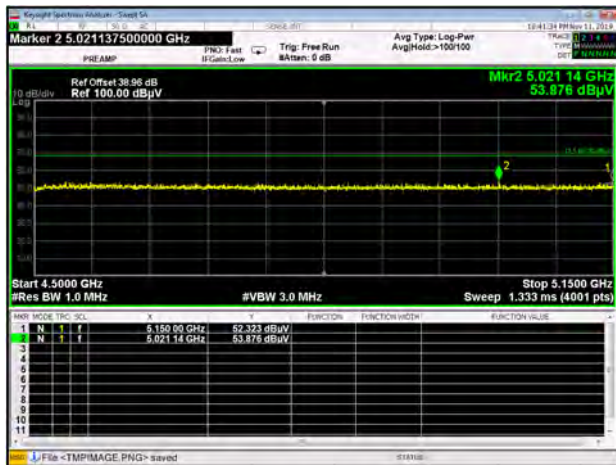

Band II 11ac20 CH64 AV



Band II 11ac20 CH64 Peak




Band II 11ac40 CH54 Peak




Band II 11ac40 CH62 Peak



Band II 11ac40 CH62 AV

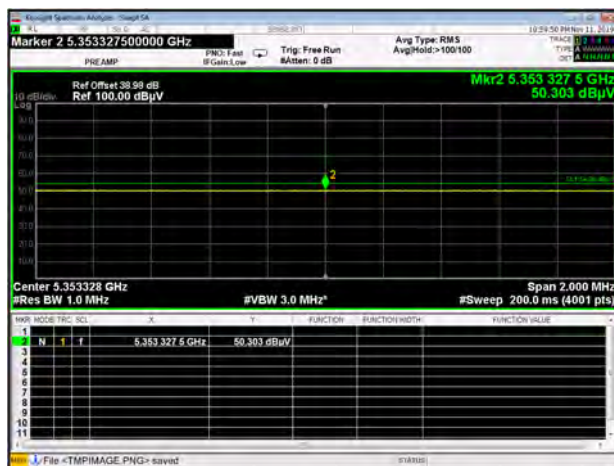


Band II 11ac80 CH58 Peak

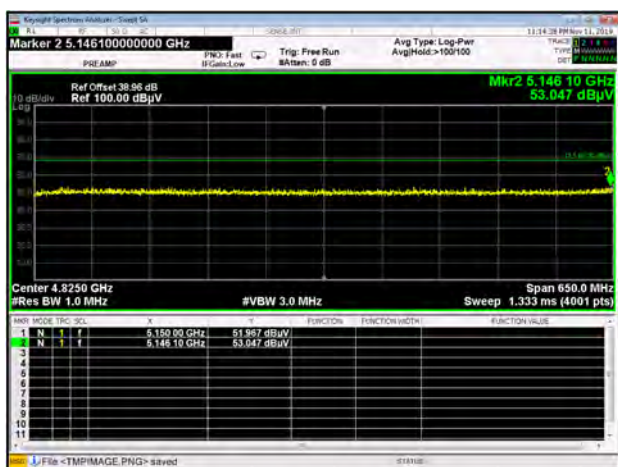


Band II 11ac80 CH58 Peak



Band II 11ac80 CH58 AV

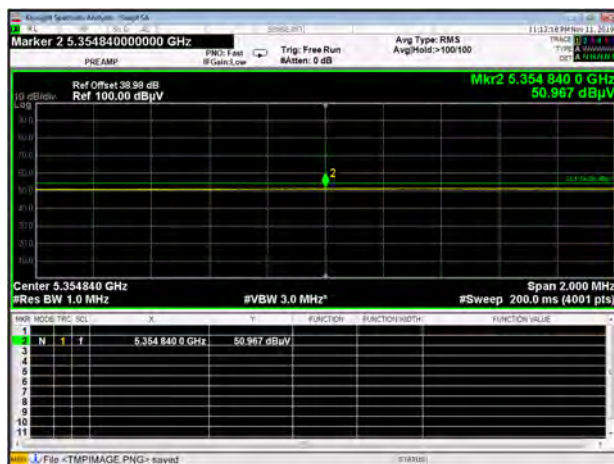

Band III 11a CH100 Peak

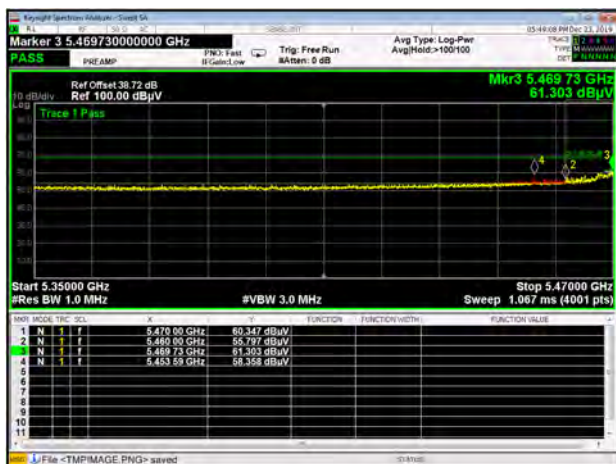

Band III 11a CH100 AV



Band III 11a CH140 Peak




Band III 11n20 CH100 Peak




Band III 11n20 CH100 AV



Band III 11n20 CH140 Peak

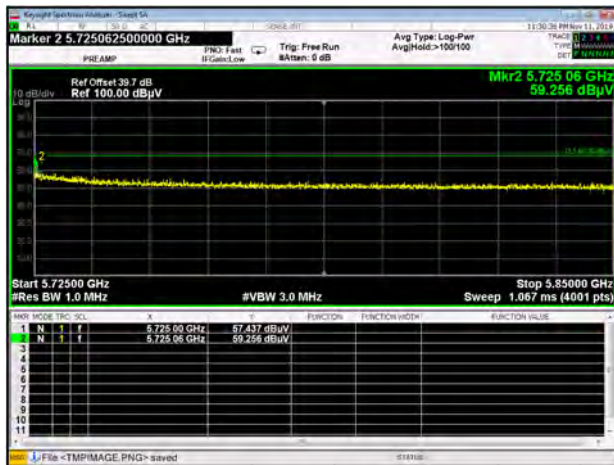


Band III 11n40 CH102 AV

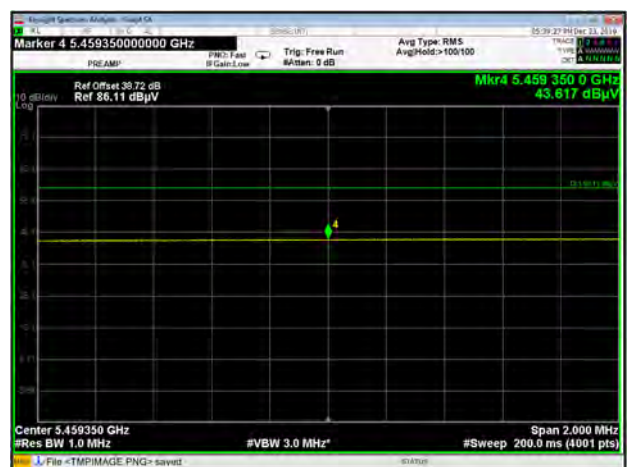


Band III 11n40 CH102 Peak




Band III 11n40 CH134 Peak

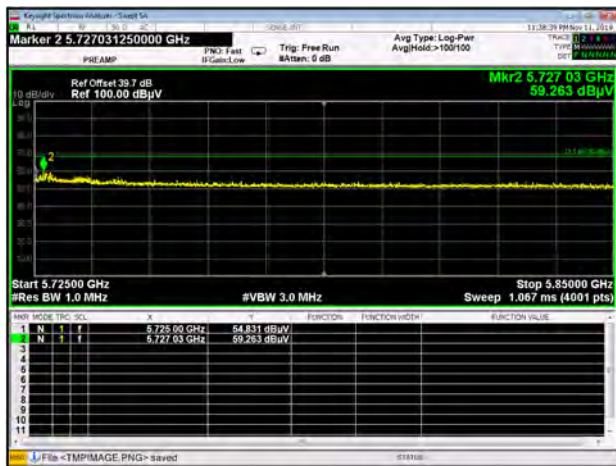

Band III 11ac20 CH100 Peak

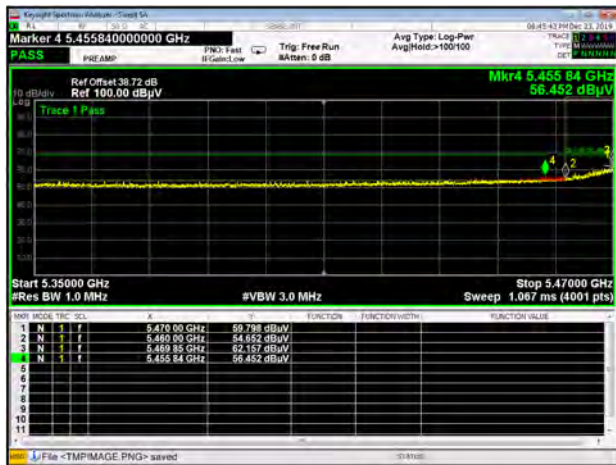

Band III 11ac20 CH100 AV

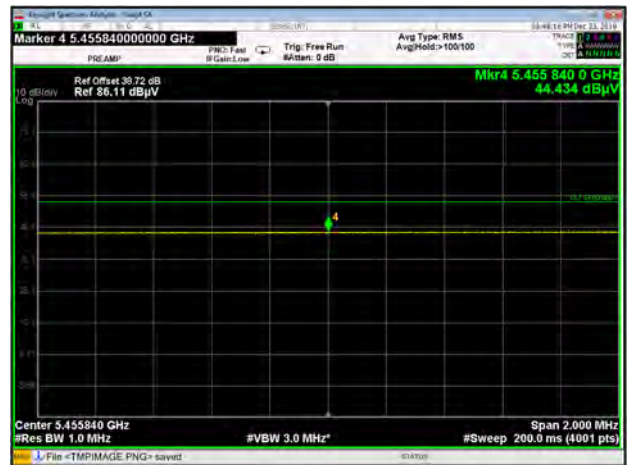


Band III 11ac20 CH140 Peak




Band III 11ac40 CH102 Peak



Band III 11ac40 CH102 AV

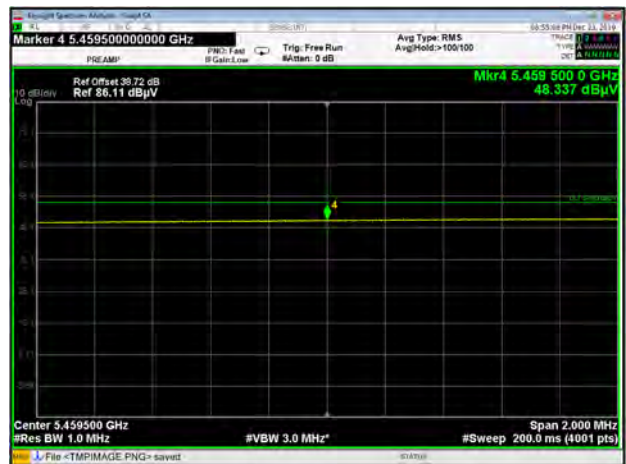


Band III 11ac40 CH134 Peak

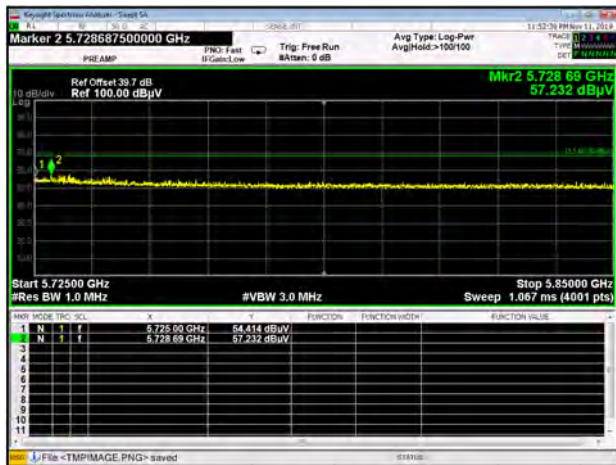

Band III 11ac80 CH106 Peak



Band III 11ac80 CH106 AV

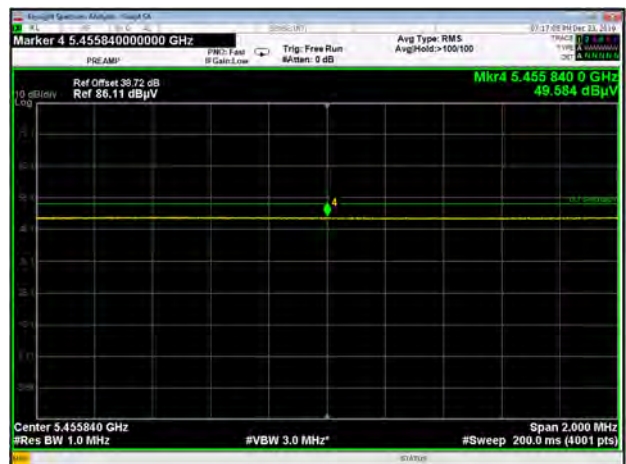

Band III 11ac80 CH122 Peak



Band IV 11a CH149 Peak



Band IV 11a CH165 Peak



Band IV 11n20 CH149 Peak



Band IV 11n20 CH165 Peak



Band IV 11n40 CH151 Peak



Band IV 11n40 CH159 Peak



Band IV 11ac20 CH149 Peak



Band IV 11ac20 CH165 Peak



Band IV 11ac40 CH151 Peak



Band IV 11ac40 CH159 Peak



Band IV 11ac80 CH155 Peak



Band IV 11ac80 CH155 Peak



A.8 Frequency Stability

Voltage vs. Frequency Stability (5180 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
TEMP. (°C)	Voltage (VDC)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
20	3.6	5180	5179.996638	-0.65	5179.997455	-0.49	5179.996588	-0.66	5179.997362	-0.51
	3.85	5180	5179.996575	-0.66	5179.996571	-0.66	5179.996570	-0.66	5179.996572	-0.66
	4.4	5180	5179.997347	-0.51	5179.996868	-0.60	5179.996866	-0.61	5179.997339	-0.51

Temperature vs. Frequency Stability (5180 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
Voltage (VDC)	TEMP. (°C)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
3.85	-30	5180	5179.997118	-0.56	5179.996703	-0.64	5179.996953	-0.59	5179.996827	-0.61
	-20	5180	5179.996967	-0.59	5179.997195	-0.54	5179.997465	-0.49	5179.996831	-0.61
	-10	5180	5179.996938	-0.59	5179.996722	-0.63	5179.996640	-0.65	5179.997565	-0.47
	0	5180	5179.997416	-0.50	5179.997137	-0.55	5179.997336	-0.51	5179.997398	-0.50
	10	5180	5179.997500	-0.48	5179.997078	-0.56	5179.996919	-0.59	5179.997050	-0.57
	20	5180	5179.997495	-0.48	5179.996982	-0.58	5179.997083	-0.56	5179.997286	-0.52
	30	5180	5179.997014	-0.58	5179.996661	-0.64	5179.997318	-0.52	5179.997281	-0.52
	40	5180	5179.997408	-0.50	5179.996703	-0.64	5179.997152	-0.55	5179.996679	-0.64
	50	5180	5179.997303	-0.52	5179.997416	-0.50	5179.996927	-0.59	5179.997109	-0.56

Voltage vs. Frequency Stability (5825 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
TEMP. (°C)	Voltage (VDC)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
20	3.6	5825	5824.997560	-0.42	5824.998135	-0.32	5824.998365	-0.28	5824.998276	-0.30
	3.85	5825	5824.997525	-0.42	5824.997522	-0.43	5824.997523	-0.43	5824.997520	-0.43
	4.4	5825	5824.998278	-0.30	5824.997942	-0.35	5824.998274	-0.30	5824.997679	-0.40

Temperature vs. Frequency Stability (5825 MHz)

Test Conditions		Test Frequency (MHz)	0 Minute		2 Minute		5 Minute		10Minute	
Voltage (VDC)	TEMP. (°C)		Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)	Measurement Frequency (MHz)	Max. Deviation (ppm)
3.85	-30	5825	5824.997541	-0.42	5824.998043	-0.34	5824.997671	-0.40	5824.997525	-0.42
	-20	5825	5824.997733	-0.39	5824.997860	-0.37	5824.998005	-0.34	5824.998407	-0.27
	-10	5825	5824.997594	-0.41	5824.997539	-0.42	5824.997561	-0.42	5824.998171	-0.31
	0	5825	5824.998130	-0.32	5824.998317	-0.29	5824.998091	-0.33	5824.998320	-0.29
	10	5825	5824.997792	-0.38	5824.997564	-0.42	5824.998026	-0.34	5824.998490	-0.26
	20	5825	5824.998498	-0.26	5824.997615	-0.41	5824.997741	-0.39	5824.998168	-0.31
	30	5825	5824.997931	-0.36	5824.997992	-0.34	5824.998232	-0.30	5824.998185	-0.31
	40	5825	5824.997680	-0.40	5824.998415	-0.27	5824.997816	-0.37	5824.997840	-0.37
	50	5825	5824.997728	-0.39	5824.997765	-0.38	5824.997706	-0.39	5824.998401	-0.27

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ19A0595-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ19A0595-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ19A0595-AI.PDF".

--END OF REPORT--