



TEST REPORT

Application No.: SZEM2006004628CR (SHEM2004003233CR)
FCC ID: 2AWDCTB1000-G
Applicant: Tsingoa (Beijing) Technology Co., Ltd
Address of Applicant: Room 32021, Zhongtai Building, Shuangqing Road No.3, Haidian District, Beijing, China
Manufacturer: Tsingoa (Beijing) Technology Co., Ltd
Address of Manufacturer: Room 32021, Zhongtai Building, Shuangqing Road No.3, Haidian District, Beijing, China
Factory: Beijing Yongshixinyu Electronic Technology Co., Ltd.
Address of Factory: Maohua factory, hofengbozuodi Road, Shunyi District, Beijing, China
Equipment Under Test (EUT):
EUT Name: UWB Tag
Model No.: Tb1000-g
Standard(s) : 47 CFR Part 15, Subpart F
Date of Receipt: 2020-04-29
Date of Test: 2020-05-13 to 2020-05-23
Date of Issue: 2020-05-25

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Revision Record			
Version	Description	Date	Remark
00	Original	2020-05-25	/

Authorized for issue by:			
			
		Foray Chen /Project Engineer	
			
		Eric Fu /Reviewer	





2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203 & Subpart F Section 15.519 (a)(2)	ANSI C63.10 (2013)	PASS
UWB Bandwidth	47 CFR Part 15, Subpart F Section 15.503 (a)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart F Section 15.519 (a)(1)	ANSI C63.10 (2013)	PASS*
Spurious Emissions	47 CFR Part 15, Subpart F Section 15.519 (c)(d)/15.209	ANSI C63.10 (2013)	PASS
EIRP	47 CFR Part 15, Subpart F Section 15.519 (e)	ANSI C63.10 (2013)	PASS

*The details please refer to section 7.3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS	5
4.3 MEASUREMENT UNCERTAINTY	5
4.4 TEST LOCATION	6
4.5 TEST FACILITY	6
4.6 DEVIATION FROM STANDARDS	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
5 EQUIPMENT LIST	7
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	9
6.1 ANTENNA REQUIREMENT	9
7 RADIO SPECTRUM MATTER TEST RESULTS	10
7.1 RADIATED SPURIOUS EMISSIONS	10
7.2 UWB BANDWIDTH (10dB BANDWIDTH)	17
7.3 DWELL TIME	19
8 TEST SETUP PHOTOGRAPHS	22
9 EUT CONSTRUCTIONAL DETAILS	22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.7V 480mAh rechargeable battery
Test voltage:	DC 3.7V
Product category:	hand held
Antenna Gain:	0dBi
Antenna Type:	dielectric chip antenna
Modulation Type:	BPM-BPSK
Number of Channels:	1
Frequency range:	6.1GHz to 6.9GHz

4.2 Description of Support Units

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 4.5\text{dB}$ (Below 1GHz)
		$\pm 4.8\text{dB}$ (Above 1GHz)
9	Radiated Spurious emission test	$\pm 4.5\text{dB}$ (Below 1GHz)
		$\pm 4.8\text{dB}$ (Above 1GHz)
10	Temperature test	$\pm 1^\circ\text{C}$
11	Humidity test	$\pm 3\%$
12	Supply voltages	$\pm 1.5\%$
13	Time	$\pm 3\%$

Remark:

The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISCED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



5 Equipment List

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2019-09-26	2020-09-25
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2019-09-26	2020-09-25
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2019-09-26	2020-09-25
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2020-04-07	2021-04-06

RE in Chamber <1GHz						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2017-08-05	2020-08-04
2	MXE EMI receiver(3Hz-3.6GHz)	KEYSIGHT	N9038A	SEM004-15	2019-12-16	2020-12-15
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2017-06-27	2020-06-26
4	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2020-04-01	2021-03-31
5	Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
6	Coaxial Cable	SGS	N/A	SEM025-01	2019-07-11	2020-07-10

RE in Chamber 2# >1GHz						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-13	2021-03-12
2	EXA Signal Analyzer (10Hz-44GHz)	Agilent Technologies Inc	N9010A	SEM004-12	2020-04-09	2021-04-08
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2017-06-27	2020-06-26
4	Horn Antenna (800MHz-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
5	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2019-09-24	2020-09-23



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (CMAA) Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM200600462801
Page: 8 of 22

6	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2019-09-24	2020-09-23
7	Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A
8	Coaxial Cable	SGS	N/A	SEM026-01	2019-07-11	2020-07-10



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Electronics Test Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.519(a)(2)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.519(a) (2) requirement:

The use of antennas mounted on outdoor structures, e.g., antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device.

EUT Antenna:

The antenna is dielectric chip antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

Antenna location: Refer to Appendix(Internal Photos)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



7 Radio Spectrum Matter Test Results

7.1 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15, Subpart F Section 15.519 (c)(d)/15.209				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-960MHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 960MHz	RMS	1MHz	3MHz	RMS
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1610MHz	-75.3 dBm (EIRP, RBW=1MHz)		RMS	3
	1610MHz-1990MHz	-63.3 dBm (EIRP, RBW=1MHz)		RMS	3
	1990MHz-3100MHz	-61.3 dBm (EIRP, RBW=1MHz)		RMS	3
	3100MHz-10600MHz	-41.3 dBm (EIRP, RBW=1MHz)		RMS	3
	3100MHz-10600MHz	0 dBm (EIRP, RBW=50MHz)		Peak	3
	Above 10600MHz	-61.3 dBm (EIRP, RBW=1MHz)		RMS	3
	1164MHz-1240MHz	-85.3 dBm (EIRP, RBW=1kHz)		RMS	3
	1559MHz-1610MHz	-85.3 dBm (EIRP, RBW=1kHz)		RMS	3



Test Setup:

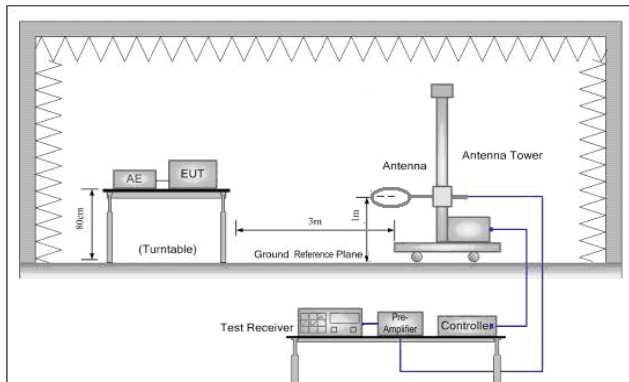


Figure 1. Below 30MHz

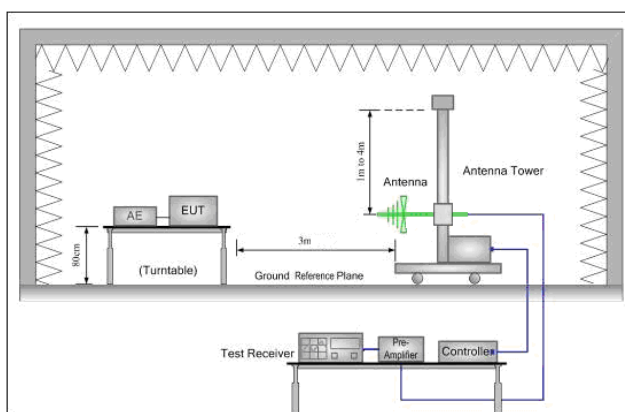


Figure 2. 30MHz to 1GHz

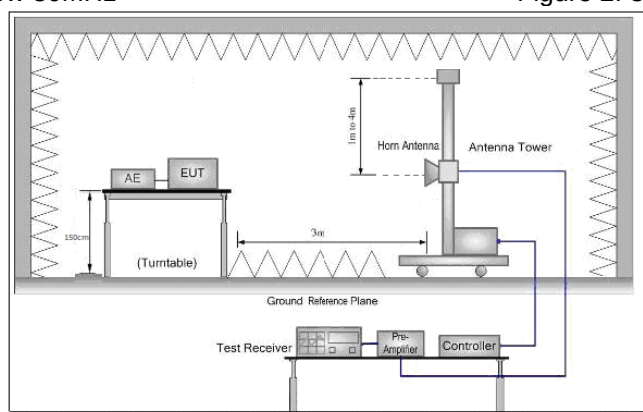


Figure 3. Above 1 GHz

Test Procedure:

- 1) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 3) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 4) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 5) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to



	360 degrees to find the maximum reading. 6) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 7) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 8) Test the EUT in the lowest channel,the middle channel,the Highest channel 9) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. 10) Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting mode
Final Test Mode:	Transmitting mode
Instruments Used:	Refer to section 4 for details
Test Results:	Pass

According to ANSI 63.10 Clause 10.3.9, the EIRP to field strength at a specified measurement distance of 3 m is below:

$$E \text{ (dBuV/m)} = \text{EIRP(dBm)} + 95.3$$

Thus, the field strength limit for the test above 1GHz is below:

Frequency	Limit		Detector	Measurement Distance
	EIRP (dBm)	Field Strength (dBuV/m)		
960MHz-1610MHz	-75.3 (RBW=1MHz)	20.00	RMS	3
1610MHz-1990MHz	-63.3 (RBW=1MHz)	32.00	RMS	3
1990MHz-3100MHz	-61.3 (RBW=1MHz)	34.00	RMS	3
3100MHz-10600MHz	-41.3 (RBW=1MHz)	54.00	RMS	3
3100MHz-10600MHz	0 (RBW=50MHz)	95.3	Peak	3
Above 10600MHz	-61.3 (RBW=1MHz)	34.00	RMS	3
1164MHz-1240MHz	-85.3 (RBW=1kHz)	10.00	RMS	3
1559MHz-1610MHz	-85.3 (RBW=1kHz)	10.00	RMS	3





Measurement Data

7.1.1.1 Peak Power

Field Strength for fundamental @ RBW=10MHz						
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Polarization
6494	32.11	9.75	38.13	69.02	72.75	Horizontal
6494	32.11	9.75	38.13	67.74	71.47	Vertical


Calculated Field Strength of fundamental @ RBW=50MHz						
Frequency (MHz)	Measured Field Strength of fundamental (FS _M) (dBuV/m)	Calculated factor for RBW=10MHz to RBW=50MHz	Calculated Field Strength of fundamental (FS _C) (dBuV/m)	Limit (dBuV/m)	Over Limit(dB)	Polarization
6494	72.75	13.98	86.73	95.30	-8.57	Horizontal
6494	71.47	13.98	85.45	95.30	-9.85	Vertical
Note: FS _C = FS _M + 20log(50MHz/10MHz) = FS _M + 13.98						





7.1.1.2 Spurious Emissions

30MHz-960MHz

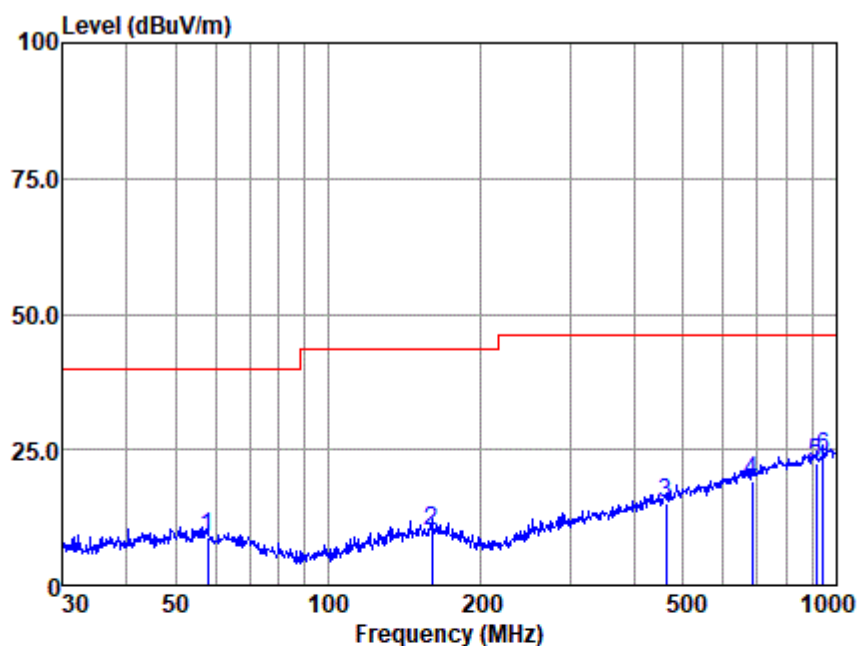


Antenna Polarity :HORIZONTAL

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	57.796	36.89	13.23	1.10	42.33	8.89	40.00	-31.11 QP
2	159.784	37.27	13.20	1.77	42.22	10.02	43.50	-33.48 QP
3	462.346	36.94	17.05	2.82	41.74	15.07	46.00	-30.93 QP
4	682.348	36.84	20.63	3.43	41.76	19.14	46.00	-26.86 QP
5	912.862	36.82	23.56	3.92	41.61	22.69	46.00	-23.31 QP
6	945.440	37.17	23.96	4.00	41.44	23.69	46.00	-22.31 QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



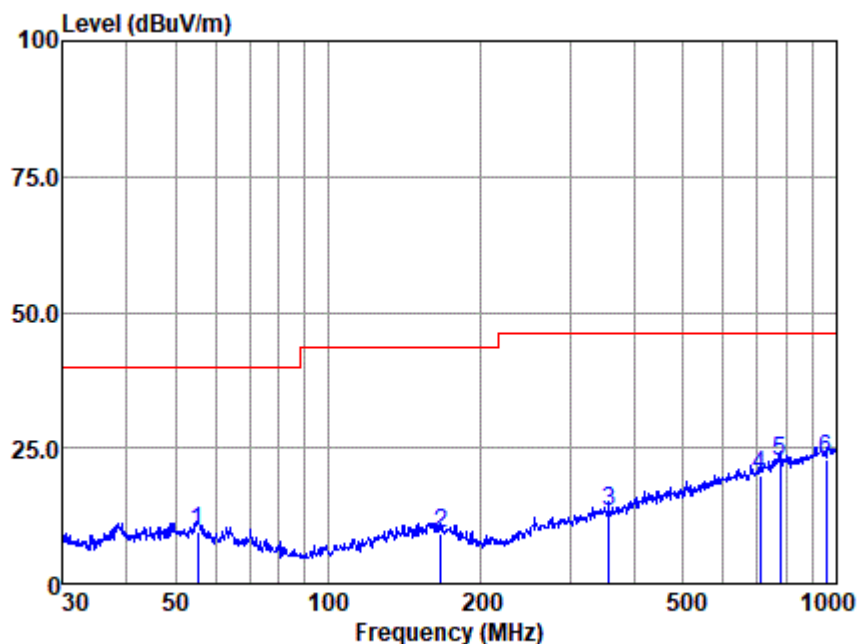

Antenna Polarity : VERTICAL

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	55.221	37.43	13.38	1.08	42.33	9.56	40.00	-30.44	QP
2	166.651	36.71	12.93	1.81	42.21	9.24	43.50	-34.26	QP
3	356.676	38.19	14.48	2.57	41.94	13.30	46.00	-32.70	QP
4	709.182	37.35	21.06	3.49	41.81	20.09	46.00	-25.91	QP
5	776.878	38.47	22.21	3.65	41.99	22.34	46.00	-23.66	QP
6	958.794	36.37	24.00	4.02	41.38	23.01	46.00	-22.99	QP

Note: Emission Level = Read Level + Antenna Factor + Cable loss - Preamp Factor





Test Data:


Transmitting with modulation Mode								
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1164MHz ≤ f ≤ 1240MHz & 1559MHz ≤ f ≤ 1610MHz								
1206.38	22.13	2.15	37.02	17.72	4.98	10.00	-5.02	Vertical
1564.72	23.53	2.42	36.94	16.23	5.24	10.00	-4.76	Vertical
960MHz ≤ f ≤ 3100MHz (except for above frequency range)								
1066.59	21.51	2.07	37.07	26.47	12.98	20.00	-7.02	Vertical
2426.54	26.1	3.12	37.47	27.12	18.87	34.00	-15.13	Vertical
f > 3100MHz								
3724.14	29.31	4.02	38.31	47.10	20.54	54.00	-33.46	Vertical
4672.12	30.49	5.32	38.57	46.49	19.68	54.00	-34.32	Vertical
5874.24	32.18	5.04	38.52	50.26	48.96	54.00	-5.04	Vertical
11712.54	35.76	7.54	36.33	22.17	29.14	34.00	-4.86	Vertical
12685.45	36.03	8.49	37.34	20.04	27.22	34.00	-6.78	Vertical
14972.24	38.26	9.33	37.48	18.53	28.64	34.00	-5.36	Vertical
1164MHz ≤ f ≤ 1240MHz & 1559MHz ≤ f ≤ 1610MHz								
1204.24	22.11	2.15	37.02	18.71	5.95	10.00	-4.05	Horizontal
1578.44	23.6	2.42	36.96	15.66	4.72	10.00	-5.28	Horizontal
960MHz ≤ f ≤ 3100MHz (except for above frequency range)								
1006.46	21.23	2.15	37.10	28.4	14.68	20.00	-5.32	Horizontal
1878.96	24.92	2.67	37.14	29.93	20.38	34.00	-13.62	Horizontal
f > 3100MHz								
3872.76	29.67	3.96	38.25	47.25	20.64	54.00	-33.36	Horizontal
5264.39	31.78	4.59	38.74	47.21	44.84	54.00	-9.16	Horizontal
7124.34	33.25	5.71	37.23	45.94	47.67	54.00	-6.33	Horizontal
10078.54	34.99	6.53	34.17	33.51	40.86	54.00	-13.14	Horizontal
12968.22	36.4	8.02	37.39	21.96	28.99	34.00	-5.01	Horizontal
14945.08	38.26	9.33	37.56	19.39	29.42	34.00	-4.58	Horizontal

Remark:

- 1) Scan from 9kHz to 40GHz, The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




7.2 UWB Bandwidth (10dB Bandwidth)

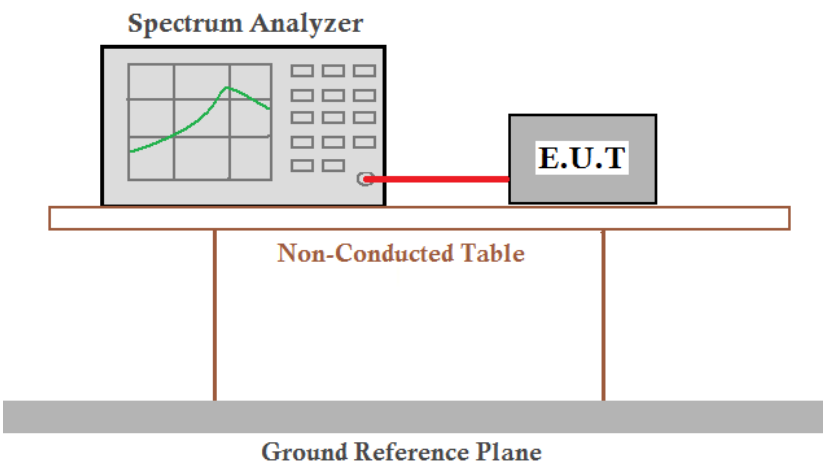Test Requirement:	47 CFR Part 15F Section 15.503(a)
Test Method:	ANSI C63.10:2013
Test Setup:	
Limit:	≥500MHz
Exploratory Test Mode:	Transmitter mode
Instruments Used:	Refer to section 4 for details
Test Results:	Pass


Measurement Data

Test Frequency (MHz)	F _L (MHz)	F _H (MHz)	10dB bandwidth (MHz)	Limit (MHz)	Results
6494	6228	6760	532	≥500MHz	Pass

Test plot as follows:

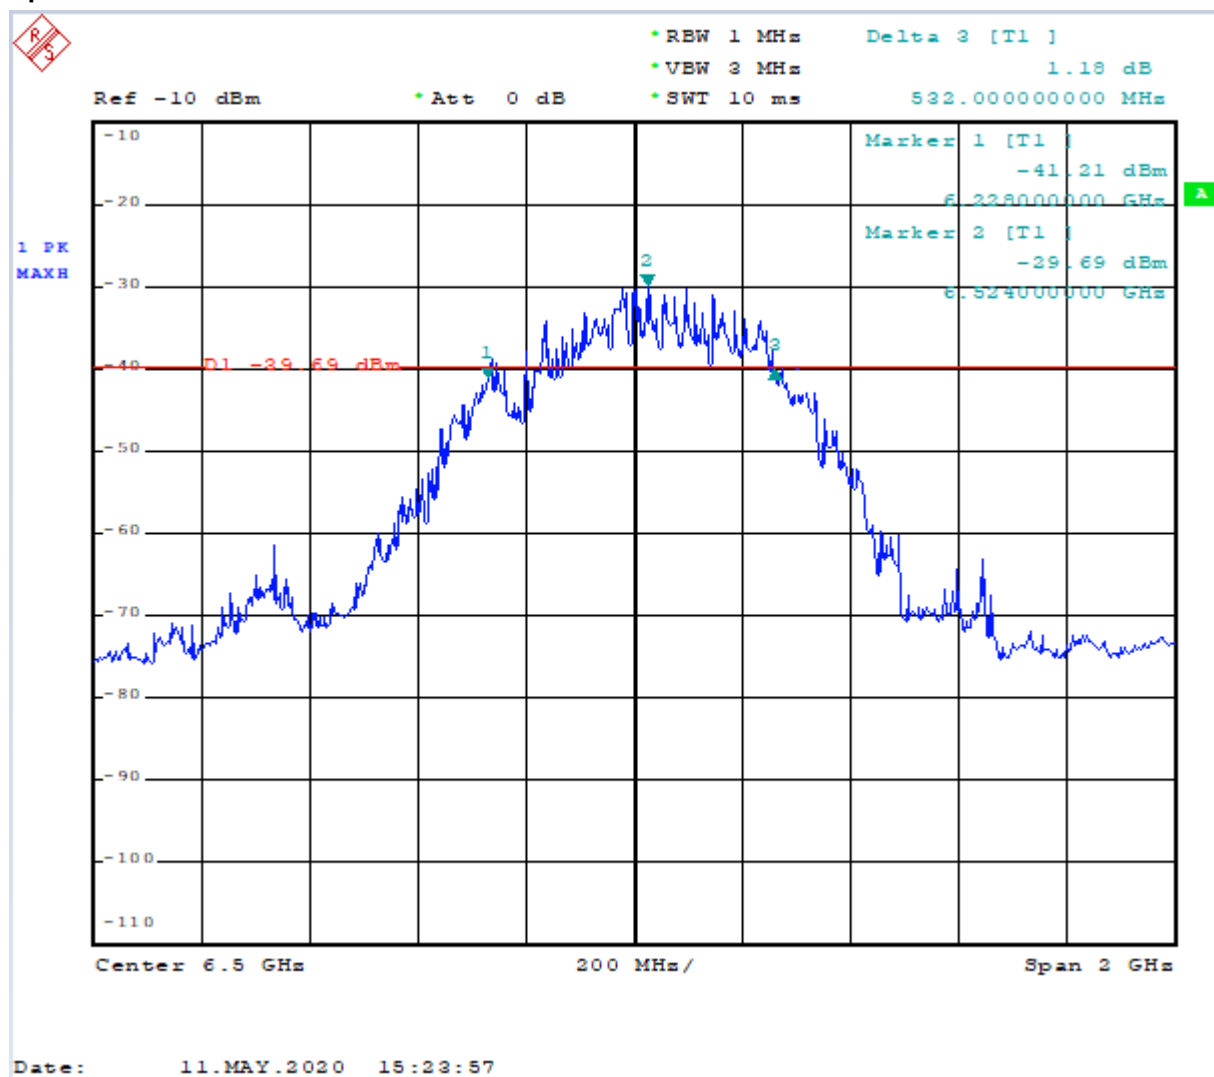


7.3 Dwell Time

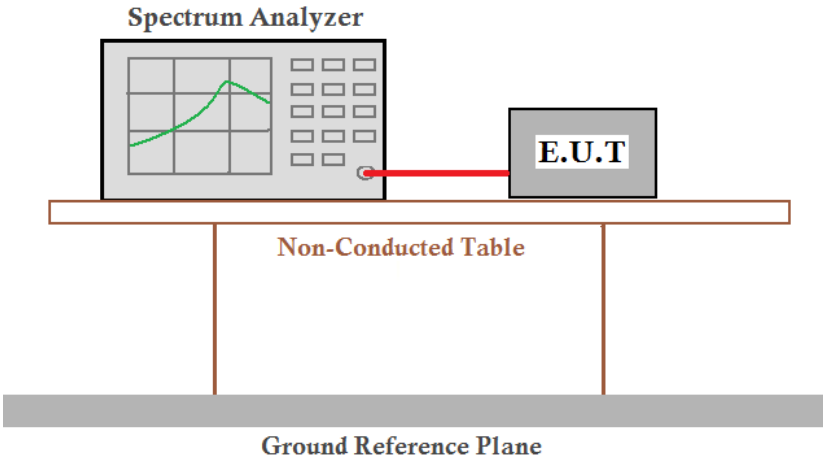Test Requirement:	47 CFR Part 15F Section 15.519(a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	
Limit:	The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received
Exploratory Test Mode:	Operation mode
Instruments Used:	Refer to section 4 for details
Test Results:	Pass*

Measurement Data


The UWB Tag is a real-location system, When UWB Tag not establish communication with UWB gateway UWB Tag cease transmission but only transmission periodic signals used for re-establishment of a communication link. so UWB Tag is satisfied the requirement for 47 CFR Part 15F Section 15.519(a)(1).

Establish communication with gateway-1

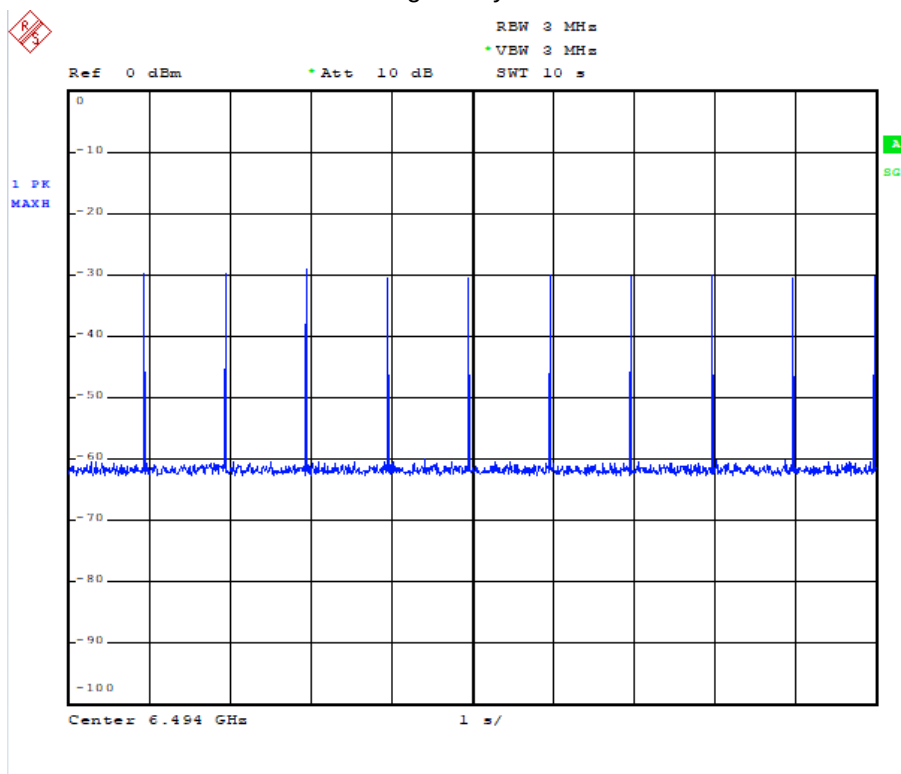


Establish communication with gateway-2

Remark: EUT connected with two gateway, the number of signal burst is 2+N where N is the number of gateway which connected with EUT.

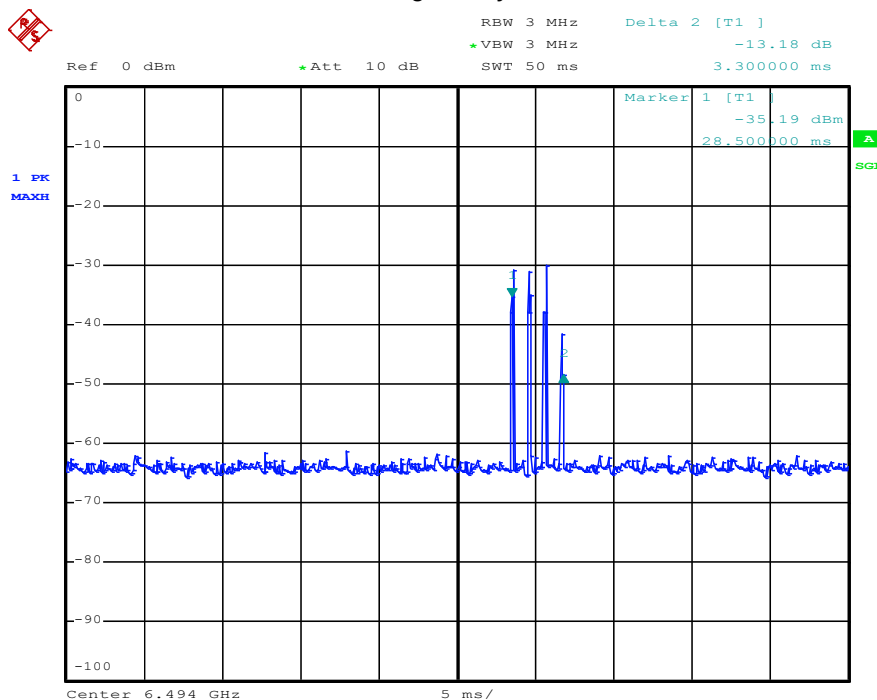


Disconnected with gateway-1

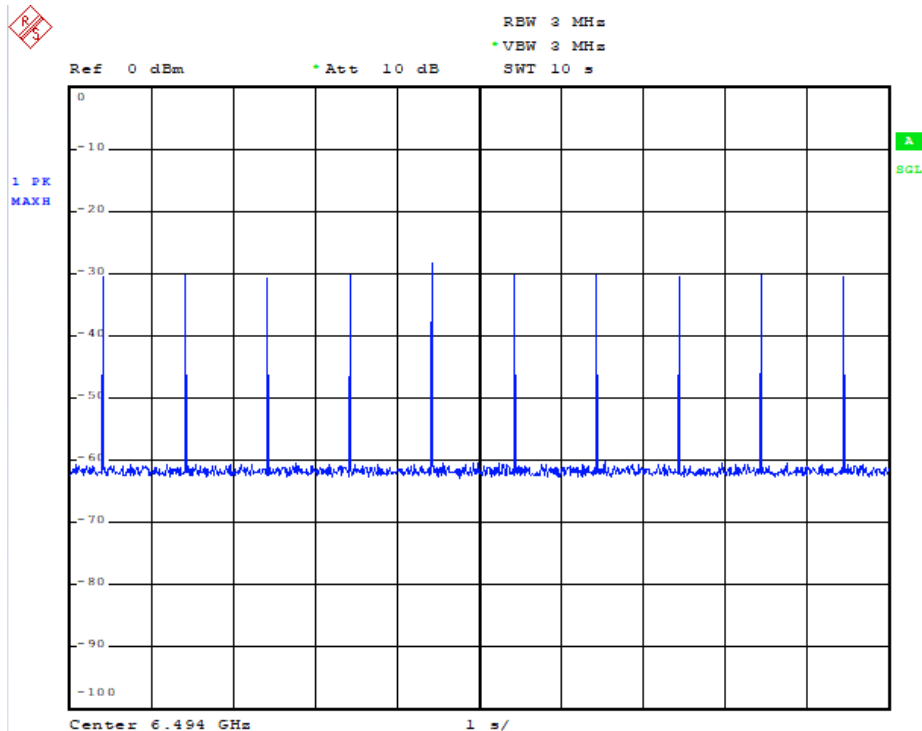

Disconnected with gateway-2

Remark: EUT disconnected with gateway, EUT transmission two periodic signals

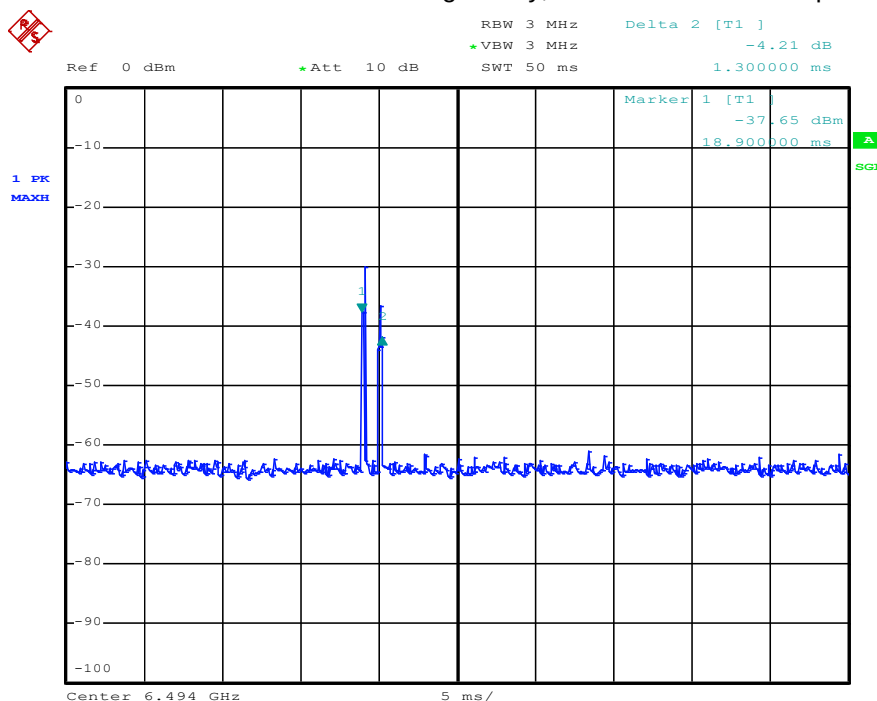



8 Test Setup Photographs

Refer to the < Test Setup photos-FCC>.

9 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com