



FCC Test Report

Report No: FCS202011056W01

Issued for

Applicant:	Guangzhou Cal-Boz Electrical Science & Technology Co., Ltd
Address:	Building A-1, No.4 Weiwu Road, Zengjiang Street, Zengcheng District, Guangzhou City, Guangdong Province, China
Product Name:	Mini computer
Brand Name:	NA
Model Name:	Z83II
Series Model:	NA
FCC ID:	2AX54-Z83II
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name: Guangzhou Cal-Boz Electrical Science &Technology Co., Ltd

Address.....: Building A-1, No.4 Weiwu Road, Zengjiang Street, Zengcheng District, Guangzhou City,Guangdong Province, China

Manufacture's Name: Guangzhou Cal-Boz Electrical Science &Technology Co., Ltd

Address.....: Building A-1, No.4 Weiwu Road, Zengjiang Street, Zengcheng District, Guangzhou City,Guangdong Province, China

Product Description

Product Name: Mini computer

Model Name.....: Z83II

Series Model: N/A

Test Standards: FCC Part15.247

Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test..... :

Date (s) of performance of tests : 05 Nov, 2020 ~ 19 Nov, 2020

Date of Issue..... : 20 Nov, 2020

Test Result : Pass

Tested by

:

Chris Chen

(Chris Chen)

Reviewed by

:

Jack Chen

(Jack Chen)

Approved by

:

Andy yue

(Andy yue)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.4 EQUIPMENTS LIST	12
3. 6DB BANDWIDTH	13
3.1 LIMIT	13
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 TEST RESULTS	14
4 CONDUCTED OUTPUT POWER	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	21
4.3 TEST SETUP	21
4.5 TEST RESULTS	21
5. POWER SPECTRAL DENSITY	22
5.1 LIMIT	22
5.2 TEST PROCEDURE	22
5.3 TEST SETUP	22
5.5 TEST RESULTS	23
5.6 ORIGINAL TEST DATA	24
6. BAND EDGE AND SPURIOUS(CONDUCTED)	30
6.1 LIMIT	30
6.2 TEST PROCEDURE	30
6.3 TEST SETUP	30
6.5 TEST RESULTS	31
6.5 ORIGINAL TEST DATA	31
7 RADIATED EMISSION MEASUREMENT	42
8 CONDUCTED EMISSION TEST	82

Table of Contents	Page
9. ANTENNA REQUIREMENT	86
9.1 STANDARD REQUIREMENT	86
9.2 RESULT	86

Revision History

Rev.	Issue Date	Effect Page	Contents
00	20 Nov, 2020	All	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC 15.247 (a) (2)	6dB Bandwidth	PASS	--
FCC 15.247 (b) (3)	Conducted Output Power	PASS	--
FCC 15.247 (e)	Power Spectral Density	PASS	--
FCC 15.247 (d)	Band-edge and Spurious Emissions (Conducted)	PASS	--
FCC 15.247 (d) FCC 15.209 FCC 15.205	Radiated Spurious Emissions	PASS	--
FCC 15.247 (d) FCC 15.209 FCC 15.205	Radiated Band Edge Compliance	PASS	--
FCC 15.207	Power Line Conducted Emission	PASS	--
FCC 15.203	Antenna requirement	PASS	--
15.205	Restricted Band Edge Emission	PASS	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated (<1G) 30MHz-1000MHz	± 5.2 dB
6	All emissions, radiated 1GHz -18GHz	± 4.66 dB
7	All emissions, radiated 18GHz -40GHz	± 4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Mini computer
Trade Name	NA
Model Name	Z83II
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Operation frequency	IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation:	IEEE 802.11b: DSSS (CCK, QPSK, BPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter rate:	IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 150 Mbps, HT40: up to 300Mbps
Power supply	DC 12V
Battery	NA
Hardware version number	NA
Software version number	NA
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	Z83II	PIFA	N/A	1.44 dBi	Antenna

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test



Test software: the FCC tool

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	8	1	LCH: CH1	2412
	8	1	MCH: CH6	2437
	8	1	HCH: CH11	2462
IEEE 802.11g	20	6	LCH: CH1	2412
	20	6	MCH: CH6	2437
	20	6	HCH: CH11	2462
IEEE 802.11n HT20	20	MCS 8	LCH: CH1	2412
	20	MCS 8	MCH: CH6	2437
	20	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	20	MCS 8	LCH: CH3	2422
	20	MCS 8	MCH: CH6	2437
	20	MCS 8	HCH: CH9	2452

Note:

(1) According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test,

(2) During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the

Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2020.10.09	2021.10.10
Signal Analyzer	R&S	FSV40-N	FCS-E012	2020.10.09	2021.10.10
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2020.10.09	2021.10.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2020.10.26	2021.10.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2020.10.09	2021.10.10
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2020.10.09	2021.10.10
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2020.05.31	2021.05.30
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2020.10.03	2021.10.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2020.10.08	2021.10.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2020.10.08	2021.10.07

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2020.10.08	2021.10.07
LISN	R&S	ENV216	FCS-E007	2020.10.08	2021.10.07
LISN	ETS	3810/2NM	FCS-E009	2020.10.08	2021.10.07
Temperature & Humidity	HTC-1	victor	FCS-E008	2020.10.08	2021.10.07

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2020.10.02	2021.10.01
Spectrum Analyzer	Agilent	E4447A	MY50180039	2020.10.08	2021.10.07
Spectrum Analyzer	R&S	FSV-40	101499	2020.10.10	2021.10.09

3. 6DB BANDWIDTH

3.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

3.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows

RBW: 100kHz

VBW: 300kHz


Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

3.3 Test setup

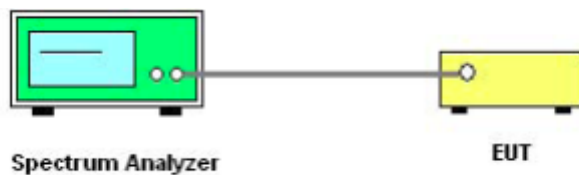


3.4 Test results


TestMode	Channel (MHz)	6dB Bandwidth (MHz)	Limit [MHz]	Verdict
802.11b	2412MHz	10.06	0.5	Pass
802.11b	2437MHz	10.06	0.5	Pass
802.11b	2462MHz	10.05	0.5	Pass
802.11g	2412MHz	15.42	0.5	Pass
802.11g	2437MHz	15.13	0.5	Pass
802.11g	2462MHz	15.11	0.5	Pass
802.11n 20	2412MHz	15.13	0.5	Pass
802.11n 20	2437MHz	15.13	0.5	Pass
802.11n 20	2462MHz	15.13	0.5	Pass
802.11n 40	2422MHz	35.10	0.5	Pass
802.11n 40	2437MHz	35.12	0.5	Pass
802.11n 40	2452MHz	35.10	0.5	Pass

3.5 Original Test Data


802.11b-CH2412MHZ

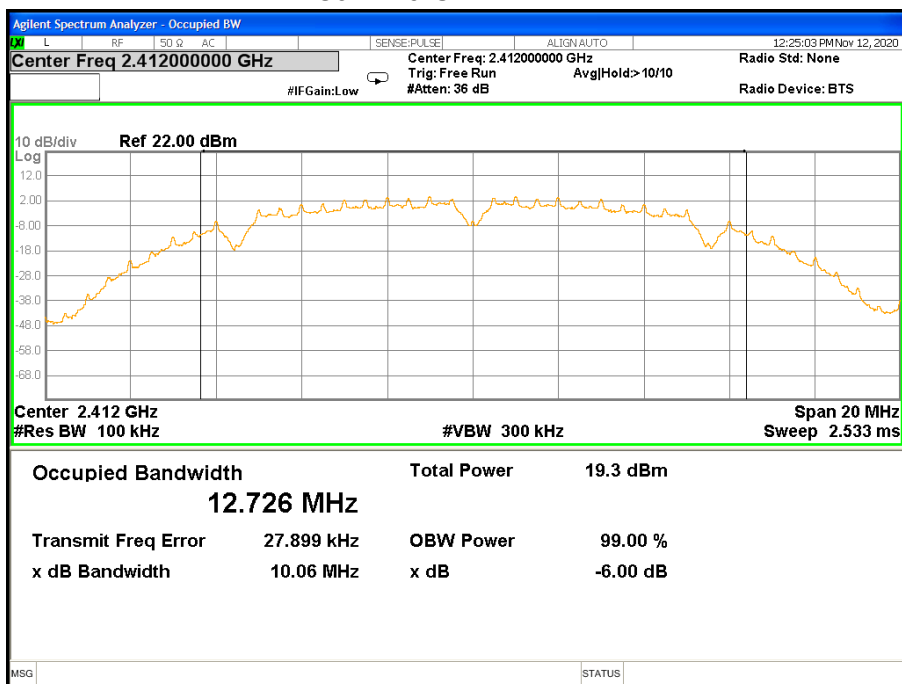


802.11b-CH237MHZ

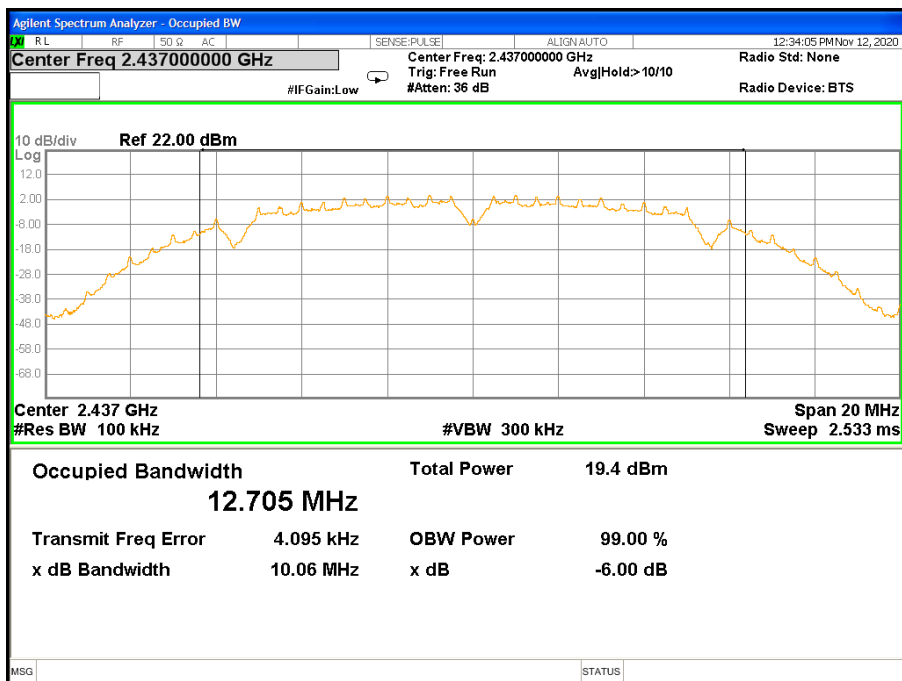


802.11b-CH2462MHZ

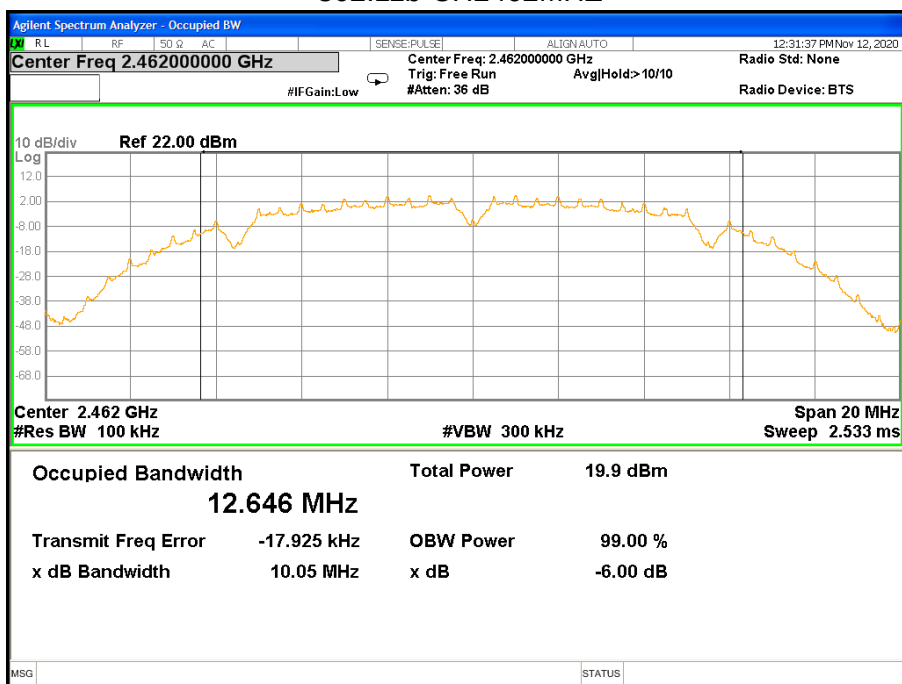


802.11g H2412MHZ

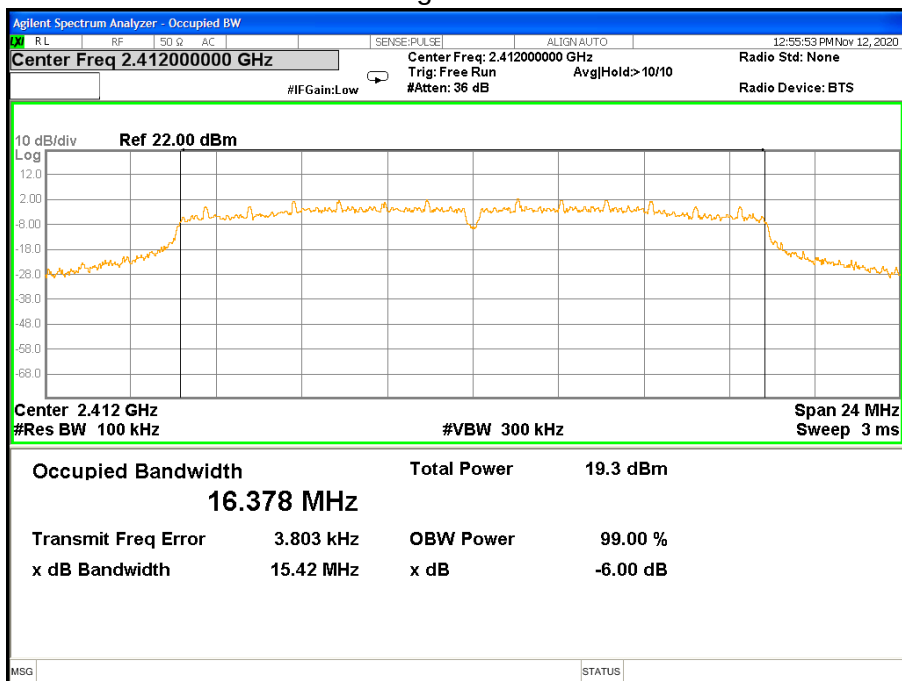


802.11g CH2437MHZ

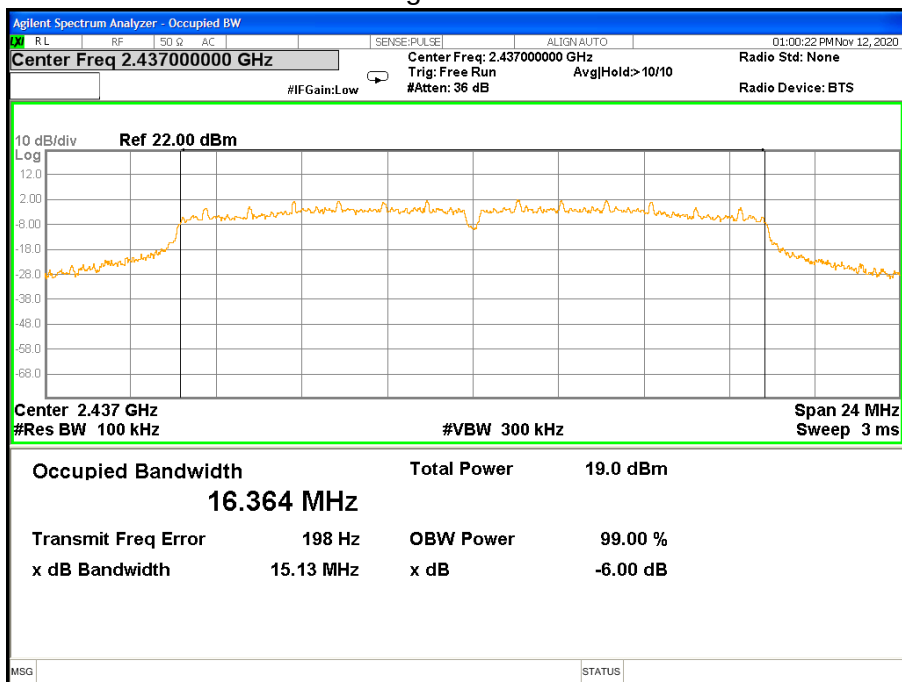


802.11g CH2462MHZ

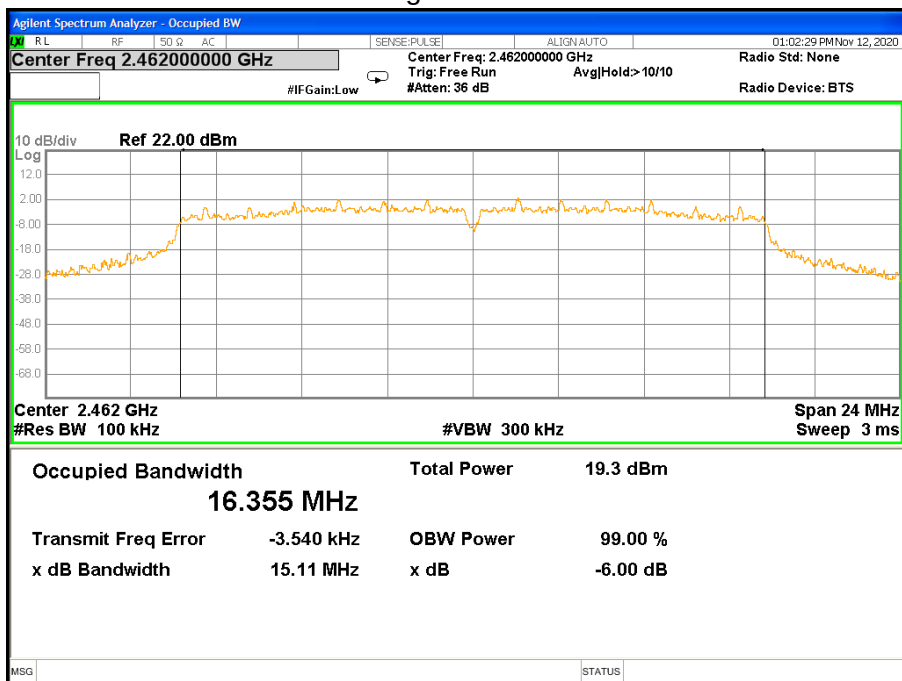


802.11n 20-2412MHz

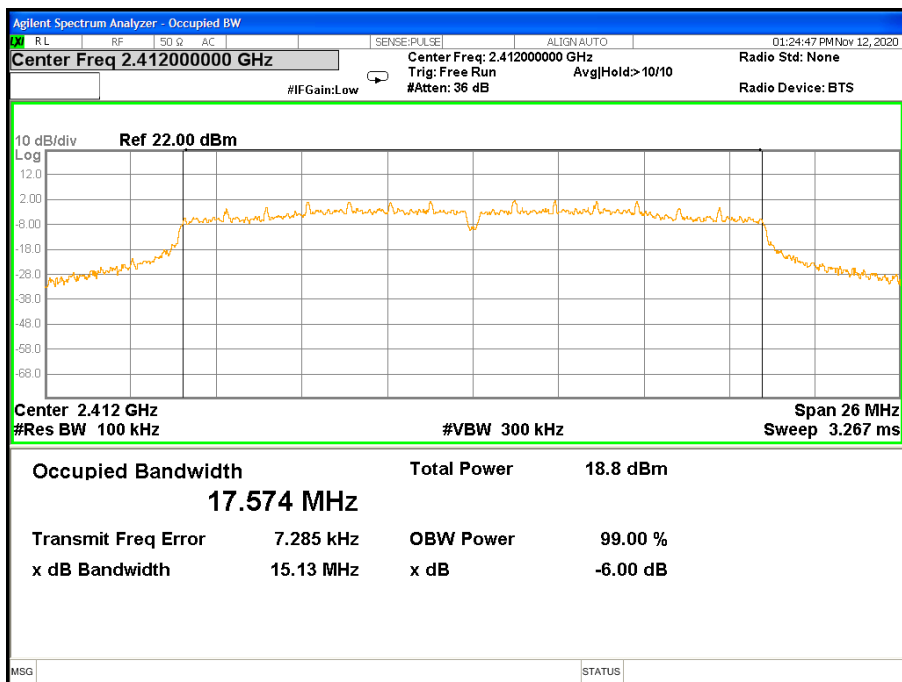


802.11n 20-2437MHz

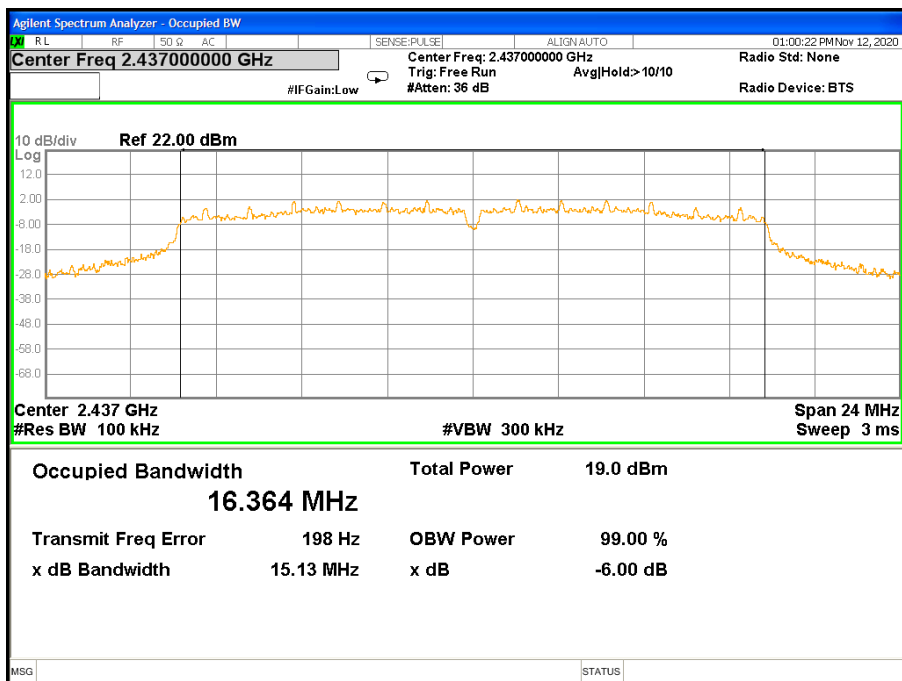


802.11n 20-2462MHz

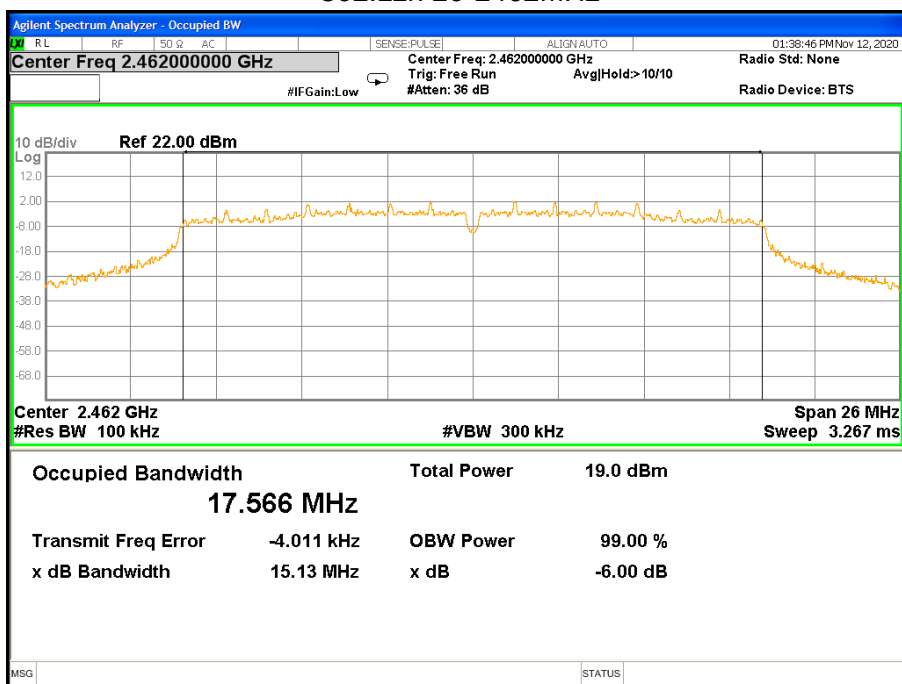


802.11n 40-2422MHz

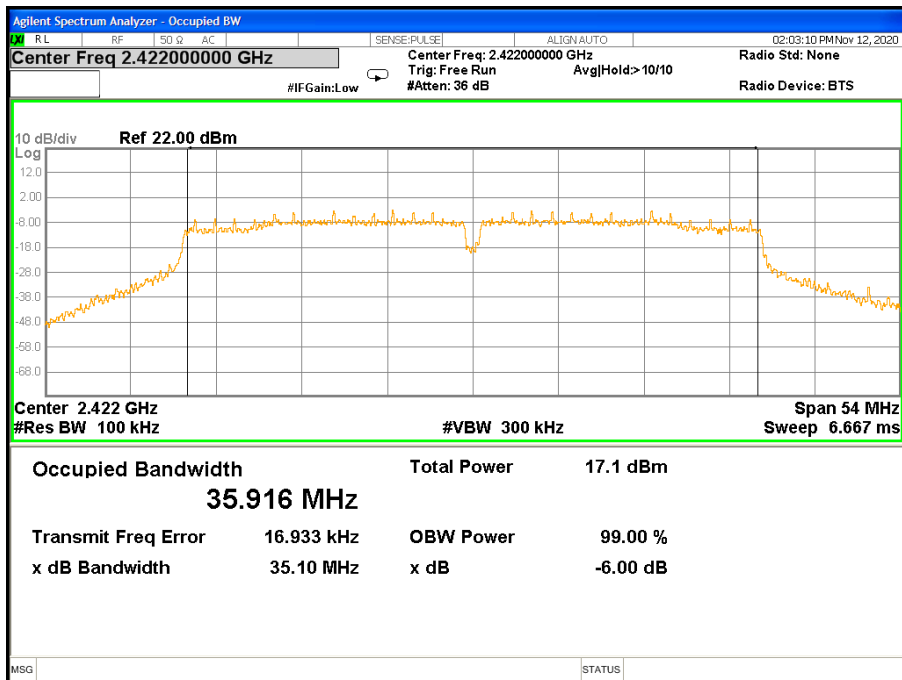

802.11n 40-2437MHz

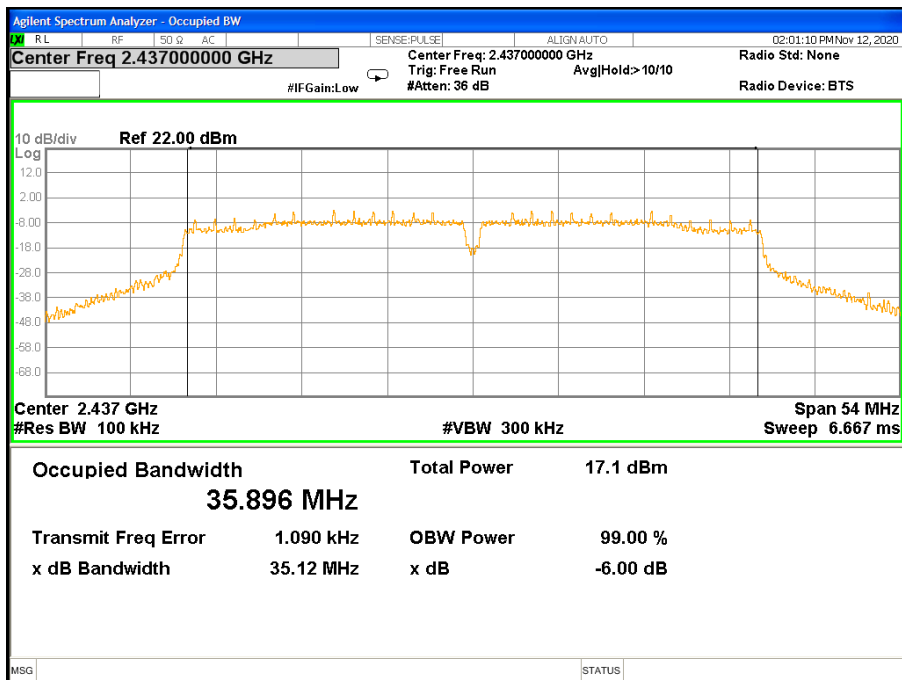

802.11n 40-2452MHz

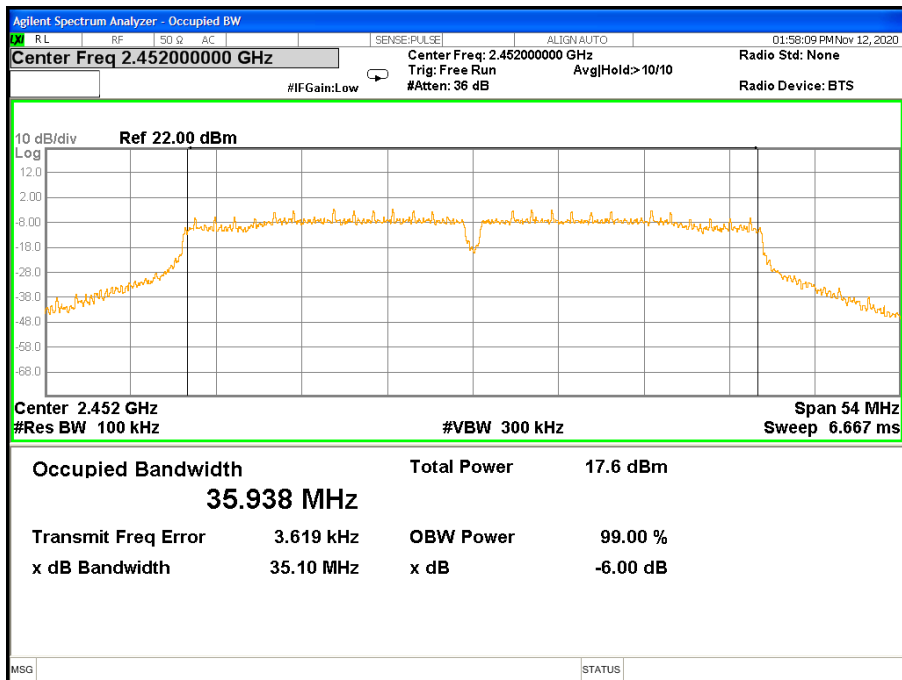

4 CONDUCTED OUTPUT POWER

4.1 limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 test procedure

- Connect each EUT's antenna output to power sensor by RF cable and attenuator
- Measure the PK output power of each antenna port by power sensor.

4.3 TEST SETUP



4.5 test results

TestMode	Channel (MHz)	Result (dBm)	Limit (dBm)	Verdict
802.11b	2412MHz	14.97	30	Pass
802.11b	2437MHz	14.50	30	Pass
802.11b	2462MHz	14.97	30	Pass
802.11g	2412MHz	19.07	30	Pass
802.11g	2437MHz	19.01	30	Pass
802.11g	2462MHz	19.08	30	Pass
802.11n 20	2412MHz	18.50	30	Pass
802.11n 20	2437MHz	18.38	30	Pass
802.11n 20	2462MHz	18.84	30	Pass
802.11n 40	2422MHz	18.01	30	Pass
802.11n 40	2437MHz	17.46	30	Pass
802.11n 40	2452MHz	17.96	30	Pass

5. POWER SPECTRAL DENSITY

5.1 LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 TEST SETUP




5.5 TEST RESULTS


TestMode	Channel (MHz)	Result (dBm/3KHz)	Limit (dBm/3KHz)	Verdict
802.11b	2412MHz	-9.507	8	Pass
802.11b	2437MHz	-8.414	8	Pass
802.11b	2462MHz	-8.826	8	Pass
802.11g	2412MHz	-12.214	8	Pass
802.11g	2437MHz	-11.999	8	Pass
802.11g	2462MHz	-12.285	8	Pass
802.11n 20	2412MHz	-12.832	8	Pass
802.11n 20	2437MHz	-13.096	8	Pass
802.11n 20	2462MHz	-11.474	8	Pass
802.11n 40	2422MHz	-17.652	8	Pass
802.11n 40	2437MHz	-16.556	8	Pass
802.11n 40	2452MHz	-16.550	8	Pass

5.6 original test data


802.11b-2412MHz

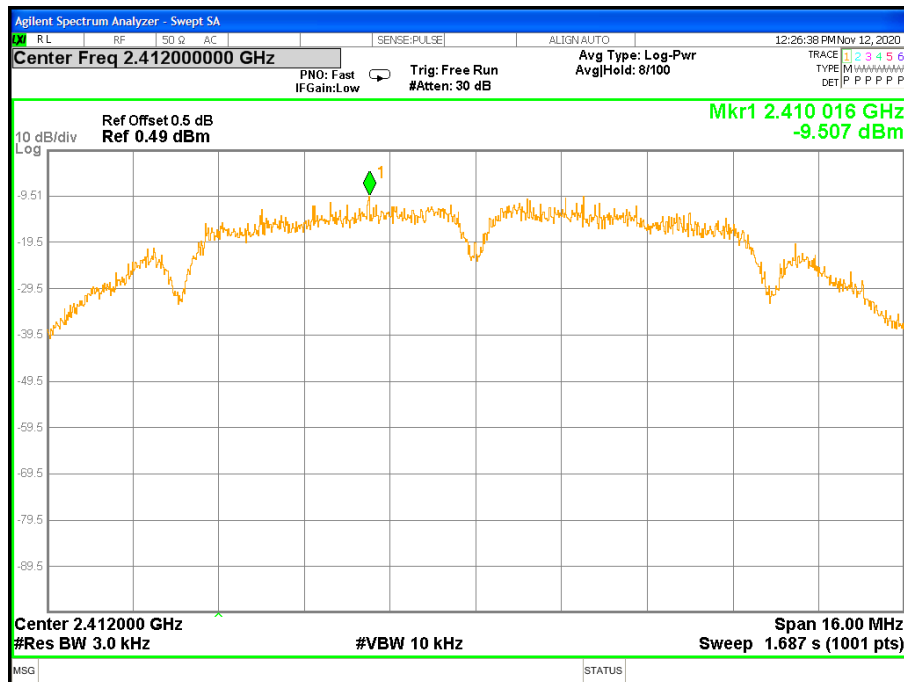


802.11b-2437MHz

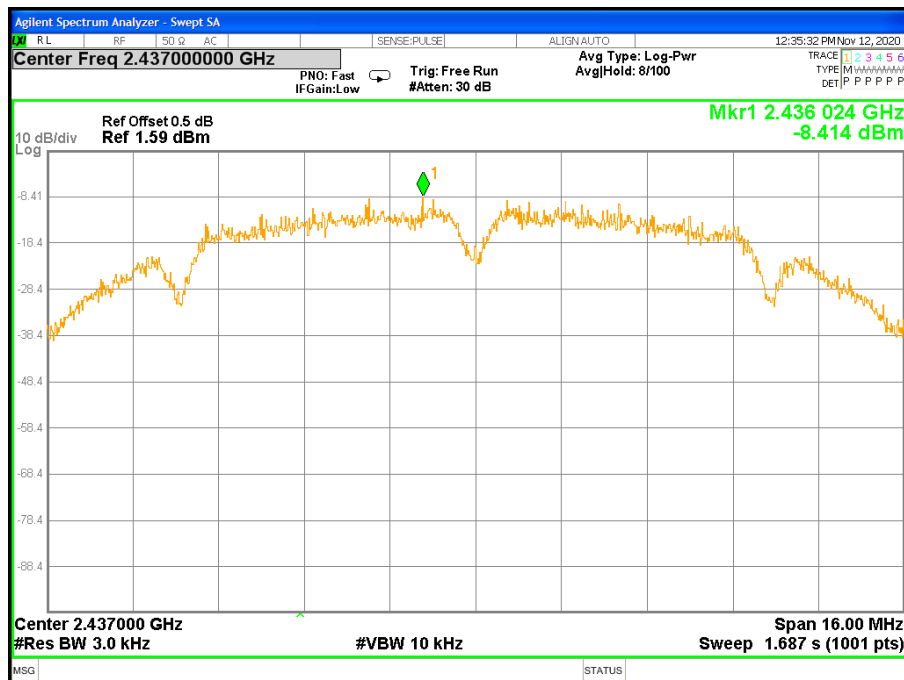


802.11b-2462MHz

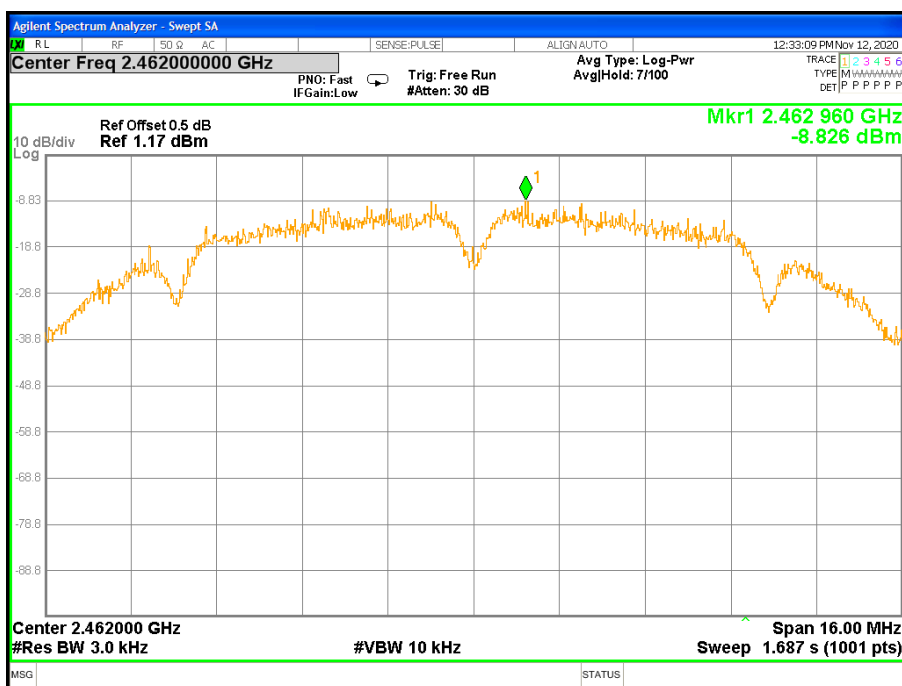


802.11g-2412MHz

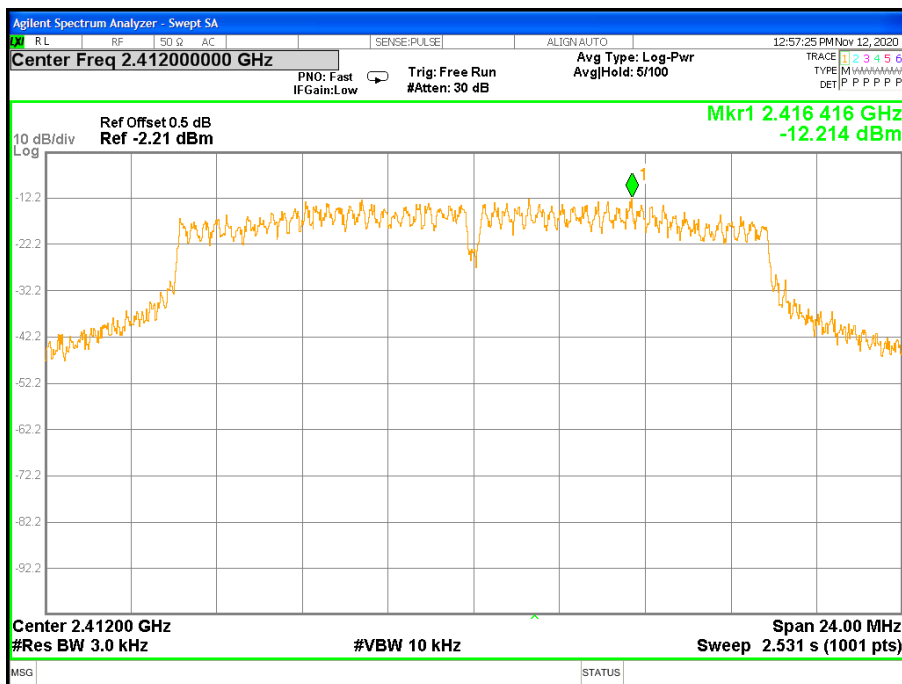


802.11g-2437MHz

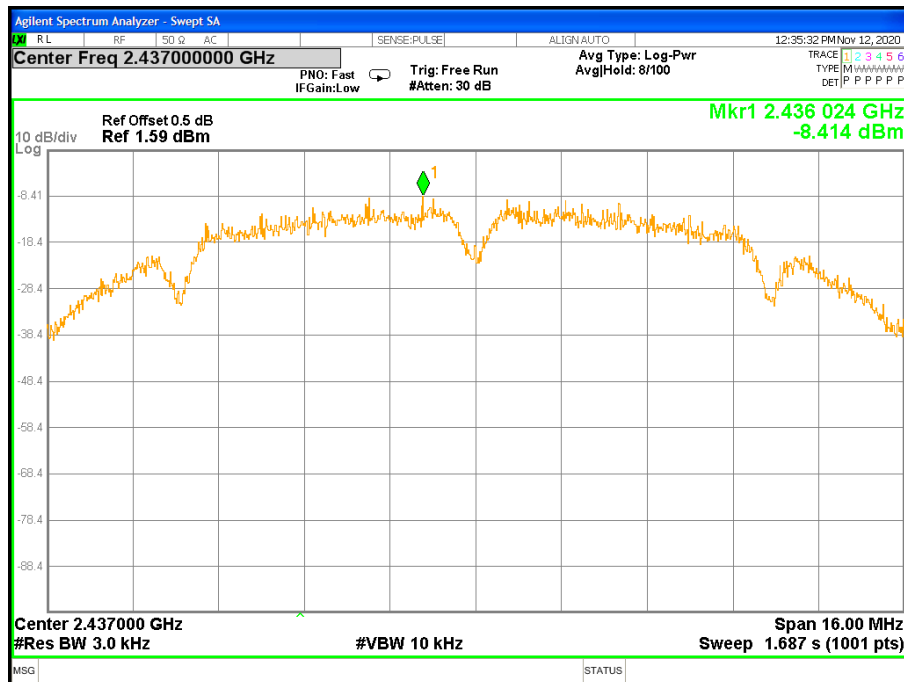


802.11g-2462MHz

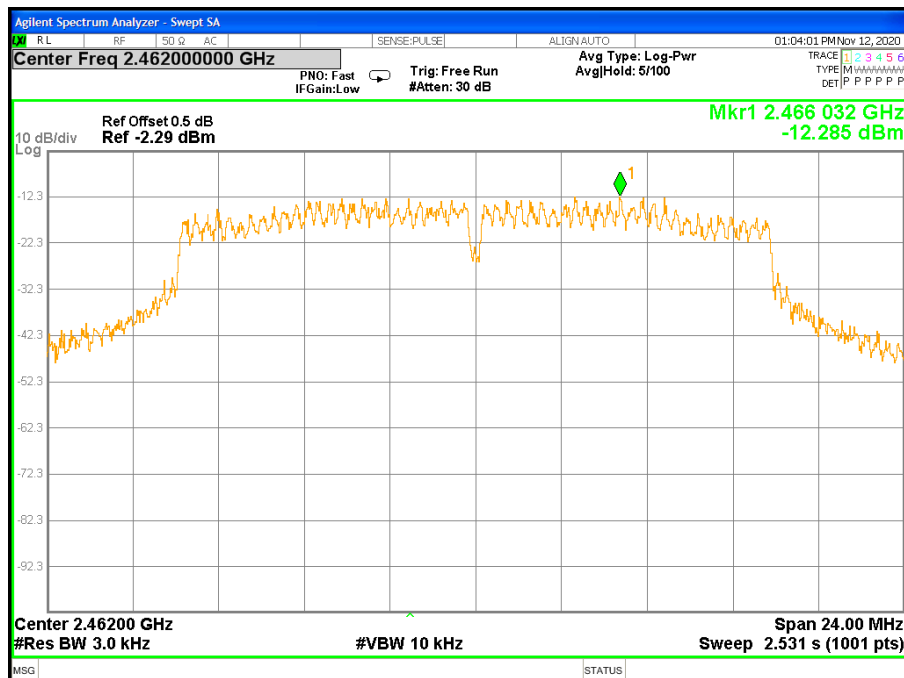


802.11n 20-2412MHz

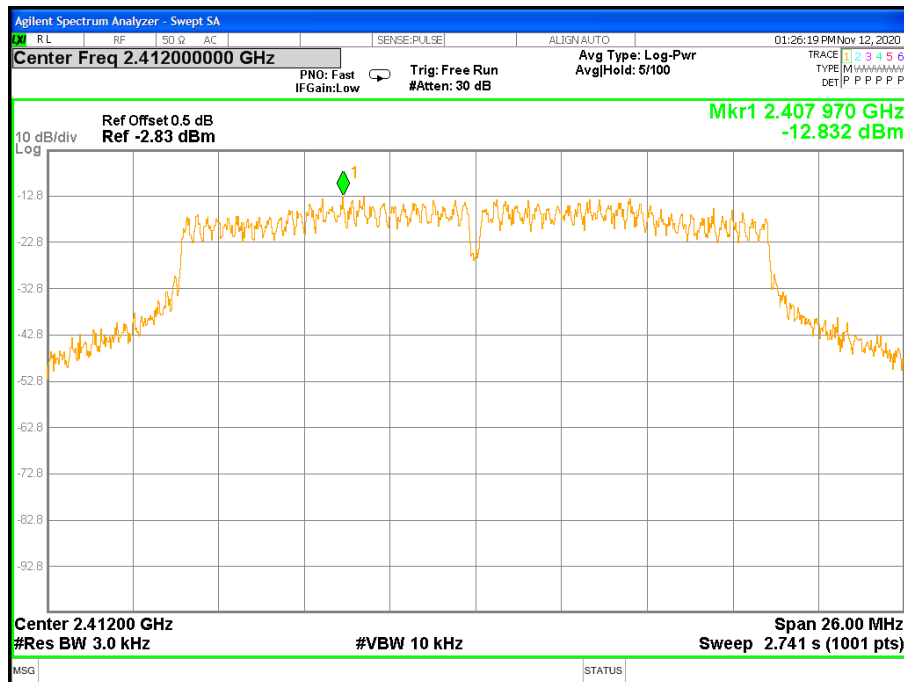


802.11n 20-2437MHz

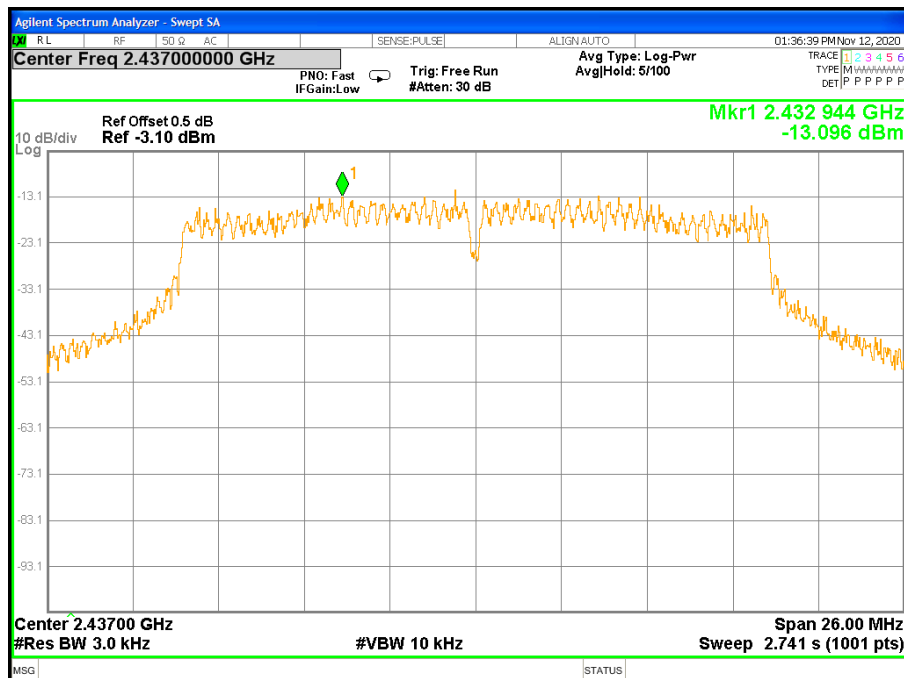


802.11n 20-2462MHz

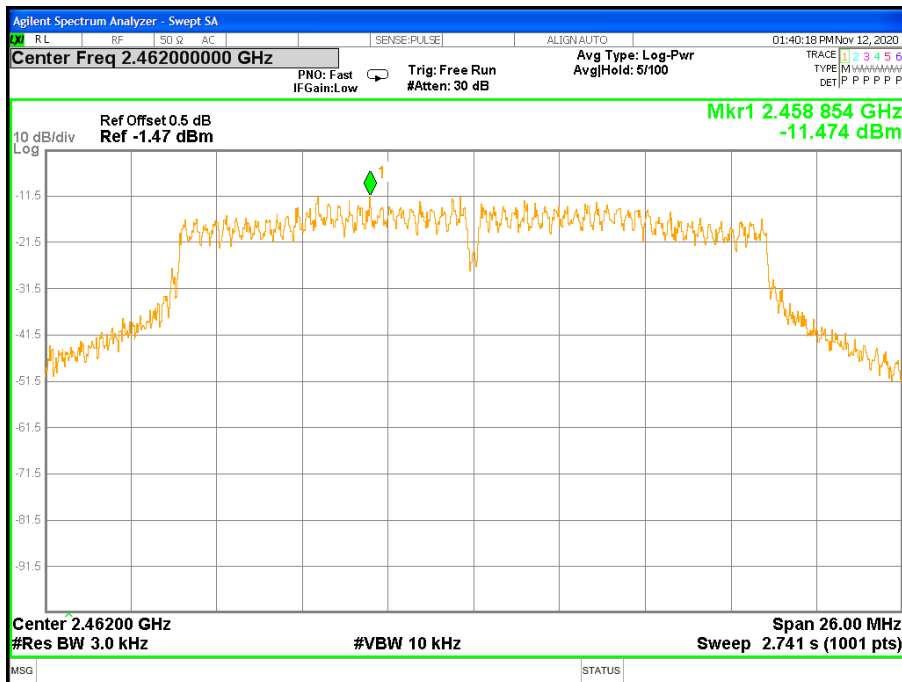


802.11n 40-2422MHz

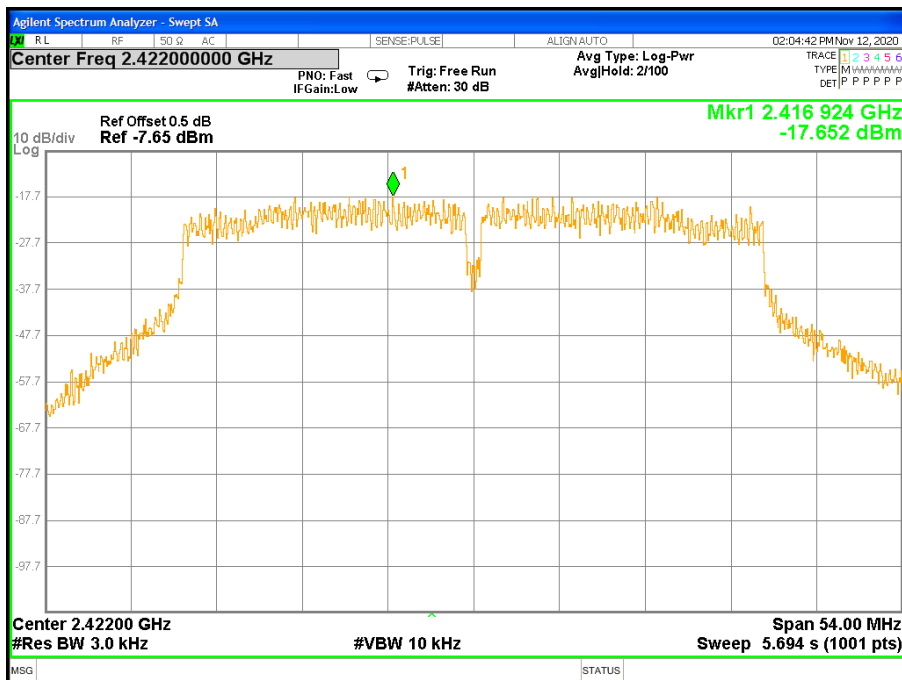

802.11n 40-2437MHz

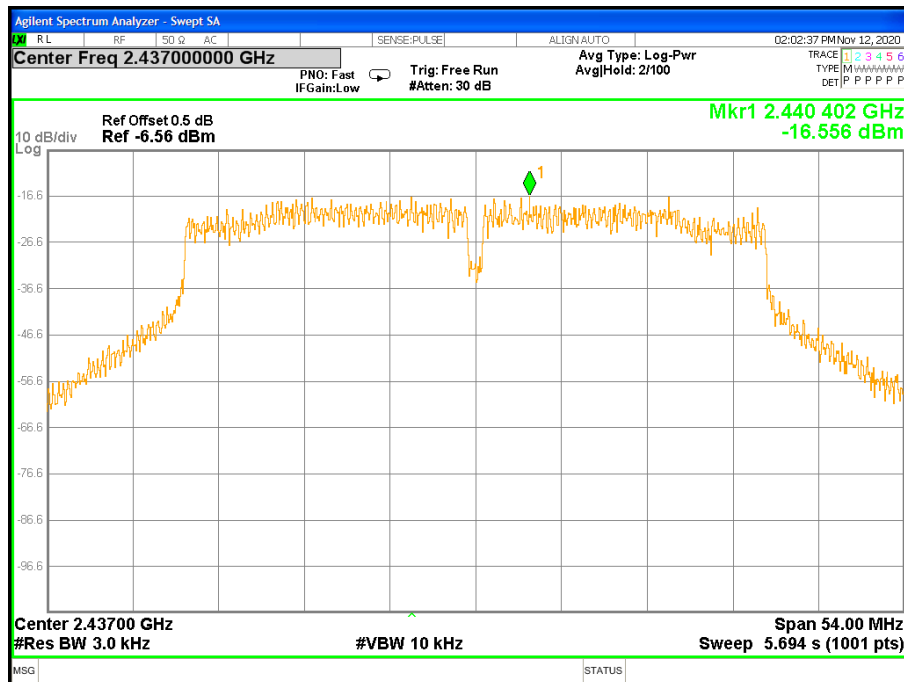

802.11n 40-2452MHz

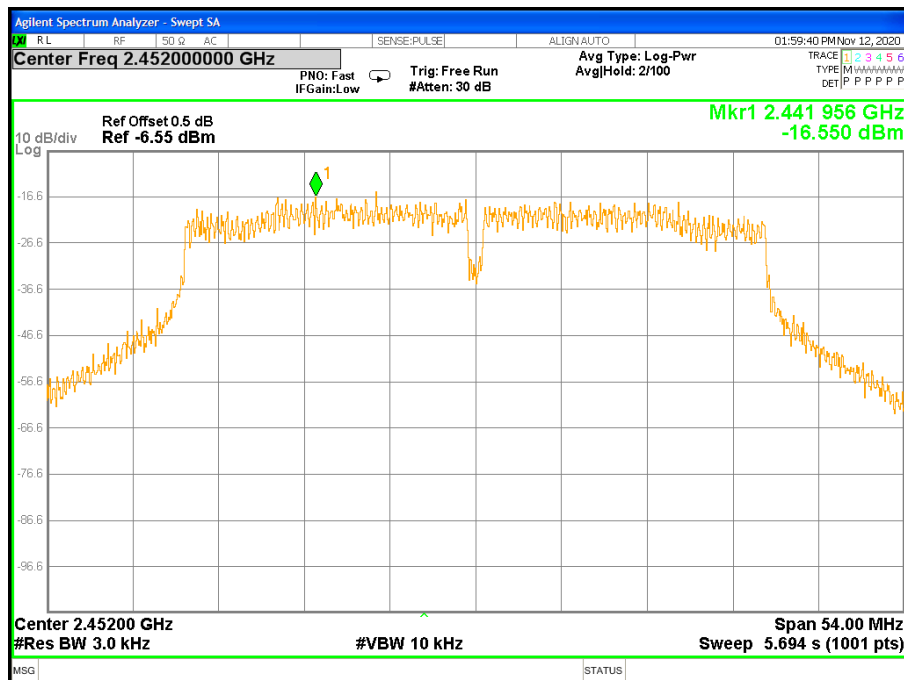

6. Band edge and spurious(conducted)

6.1 LIMIT

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100kHz
VBW:	300kHz
Span	1.5times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(3) Establish Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100kHz
VBW:	300kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

6.3 TEST SETUP

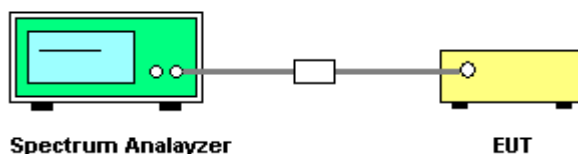


6.5 TEST RESULTS


Eut set mode	CH or Frequency	Result
802.11b	CH1	Pass
	CH11	Pass
802.11g	CH1	Pass
	CH11	Pass
802.11n 20	CH1	Pass
	CH11	Pass
802.11n 40	CH3	Pass
	CH9	Pass

6.5 Original test data


802.11b Low CH

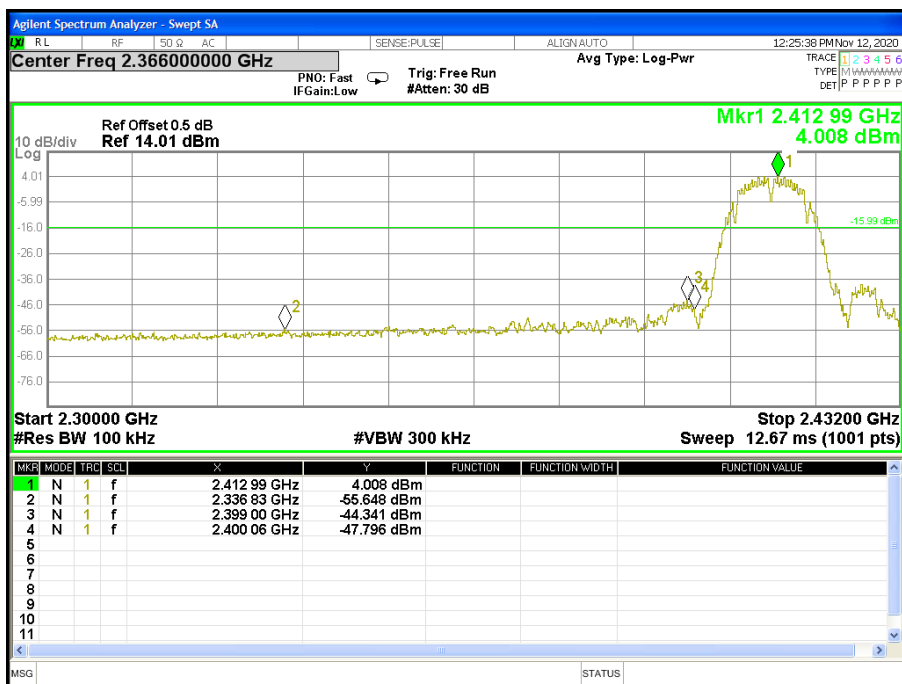


802.11b High CH

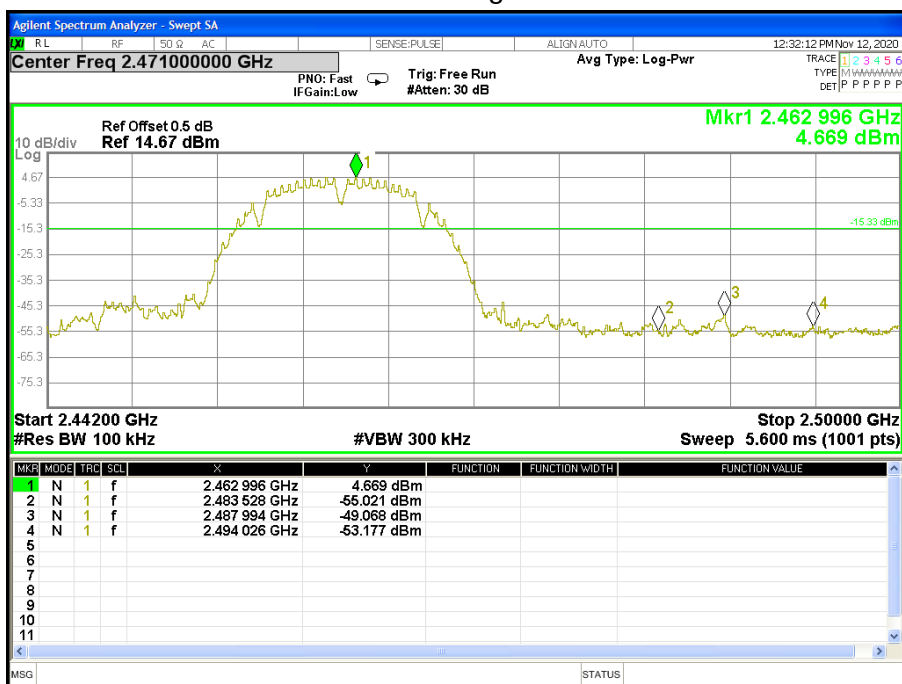


802.11g low CH

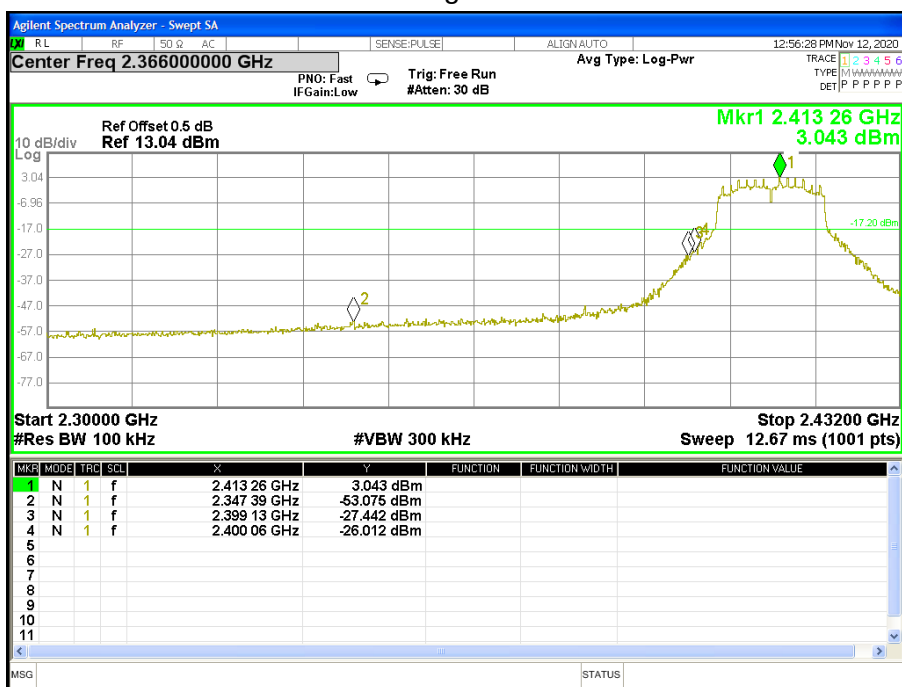


802.11g high CH

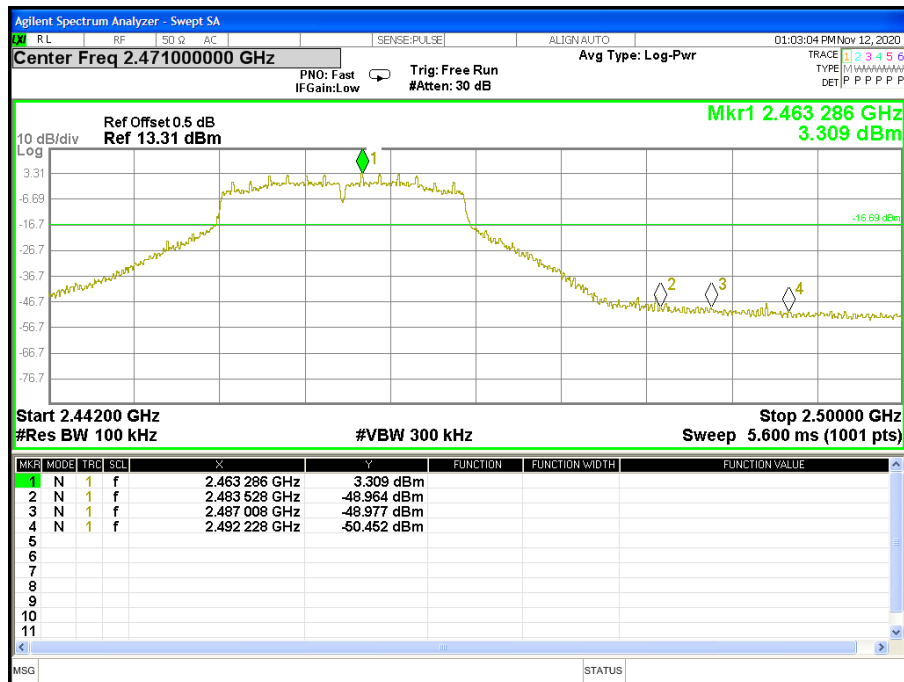


802.11n20 Low CH

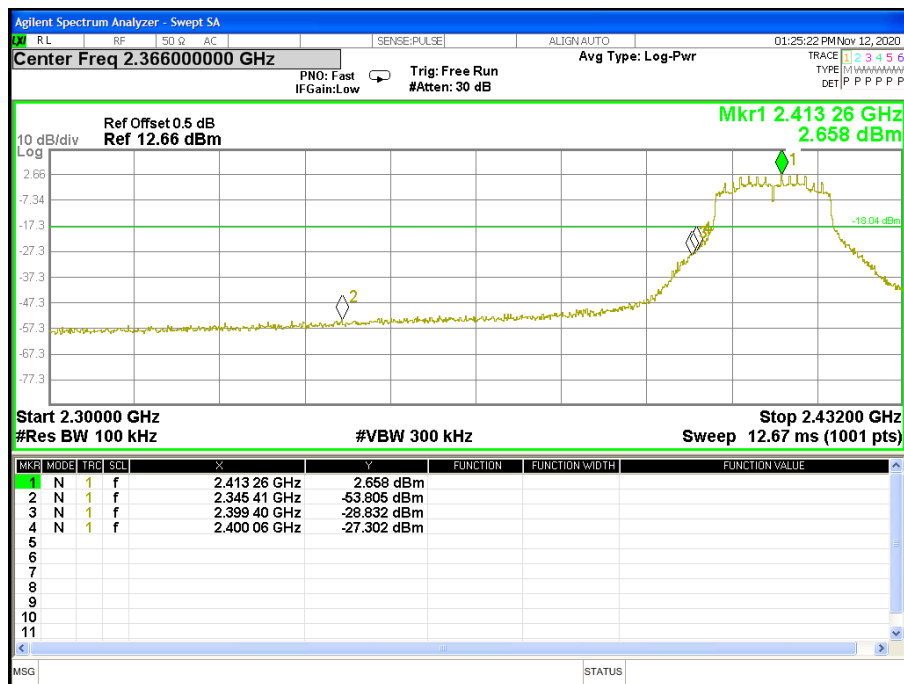


802.11n20 High CH

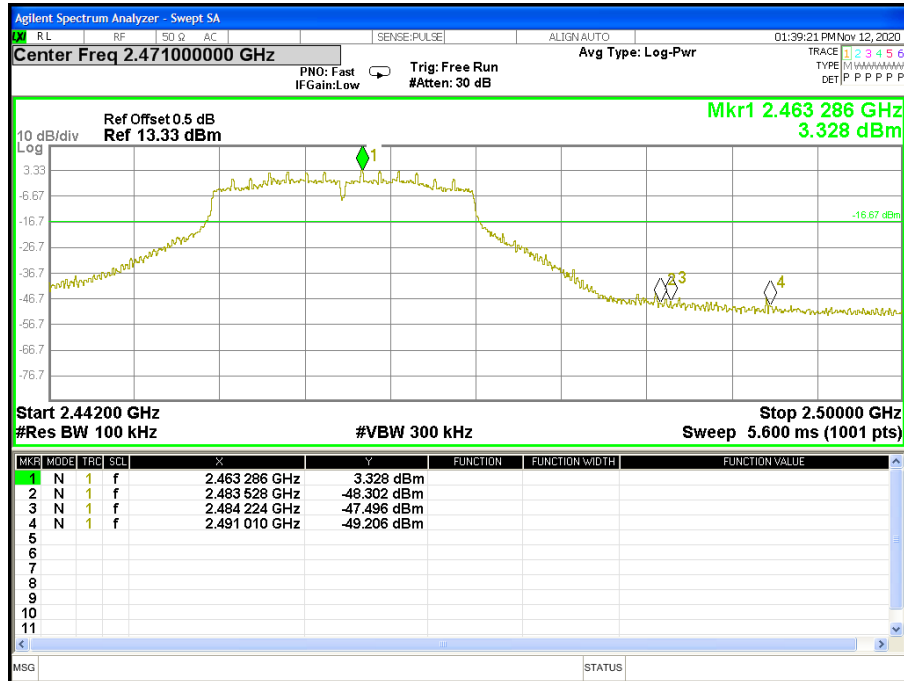

802.11n40 Low CH

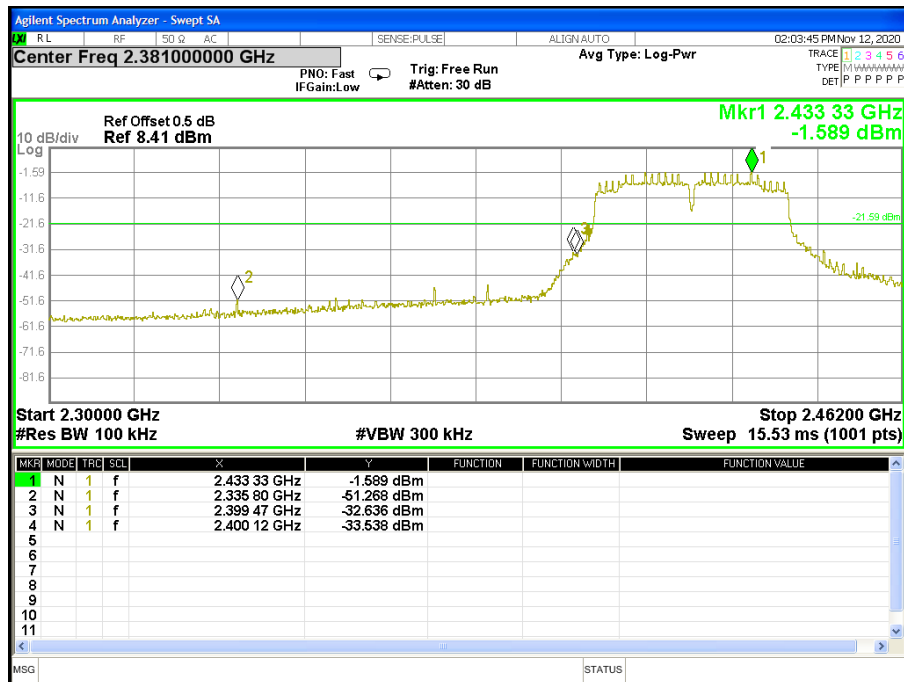


802.11n40 High CH

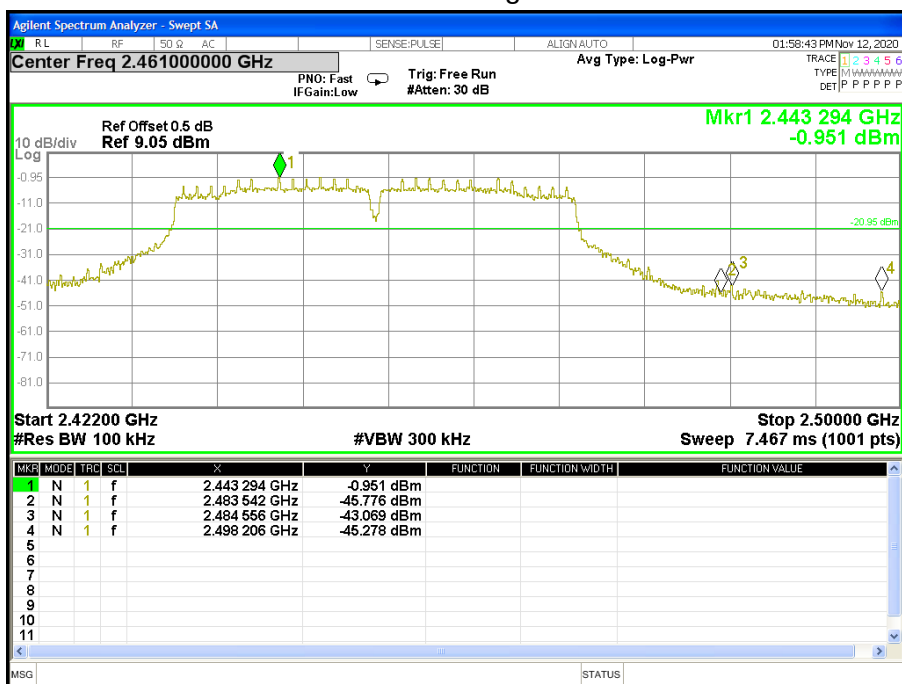


Spurious emissions
(802.11b)


802.11b low CH, 2412MHz

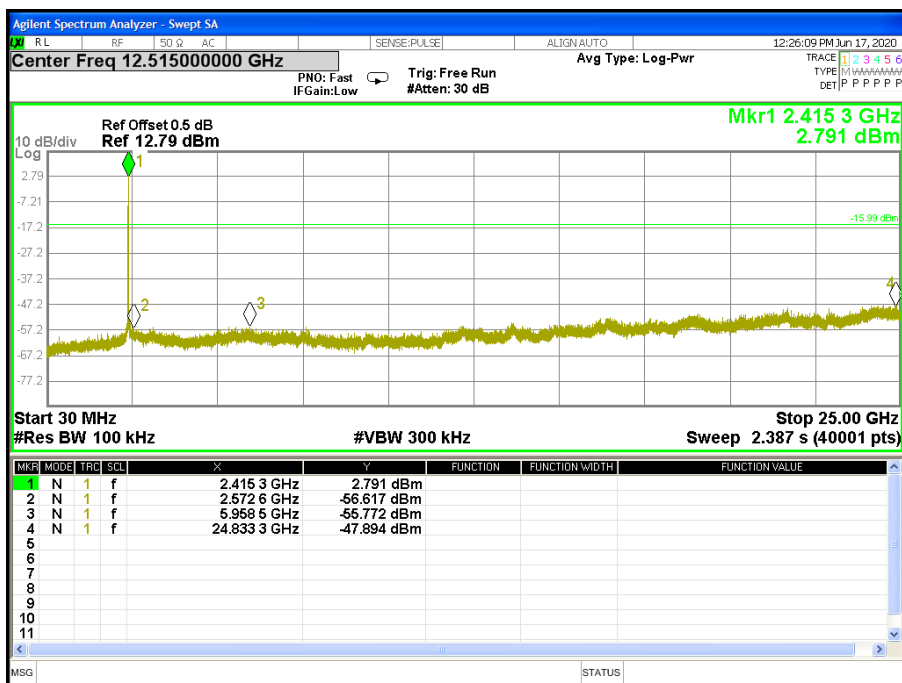

802.11b Middle CH, 2437MHz

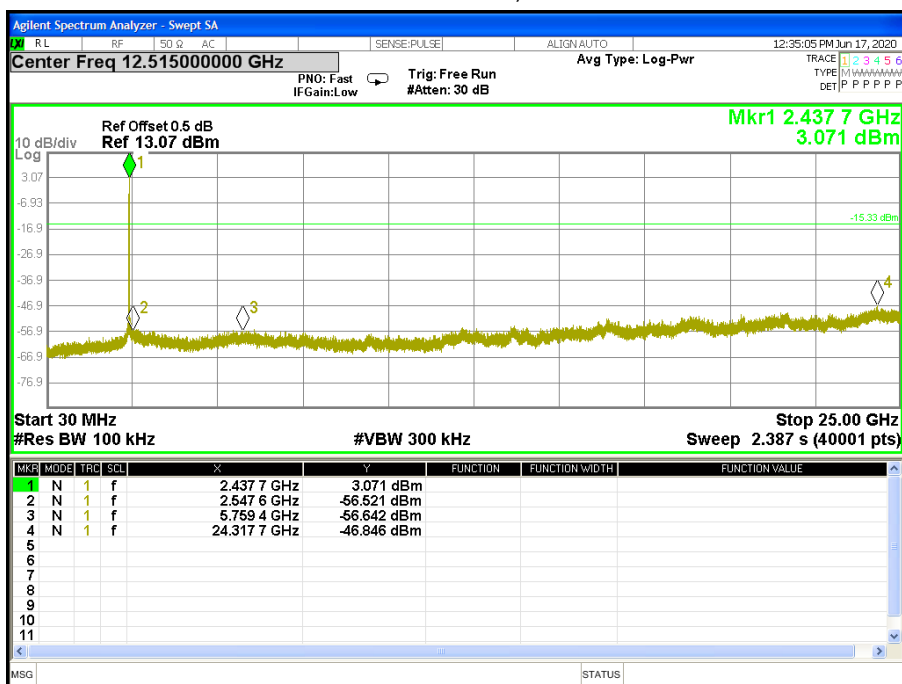


802.11b High CH, 2462MHz

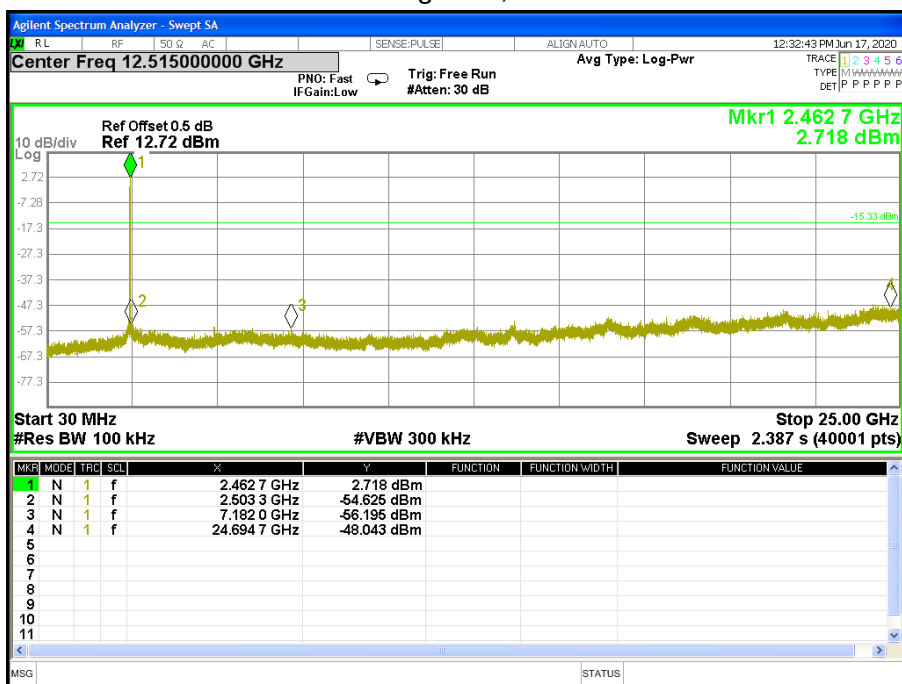


(802.11g)


802.11g Low CH, 2412MHz

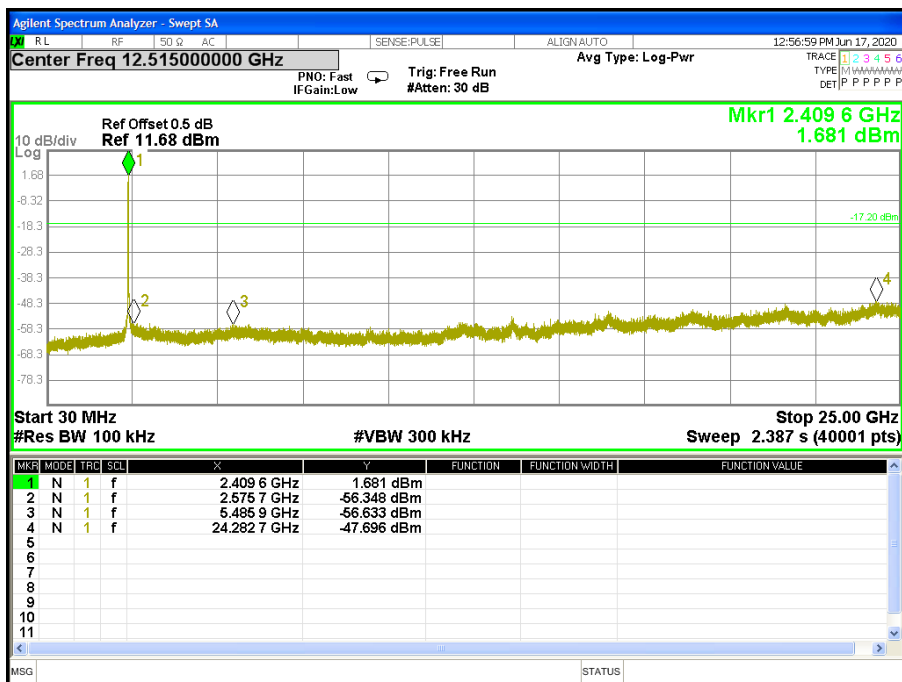


802.11g Middle CH, 2437MHz

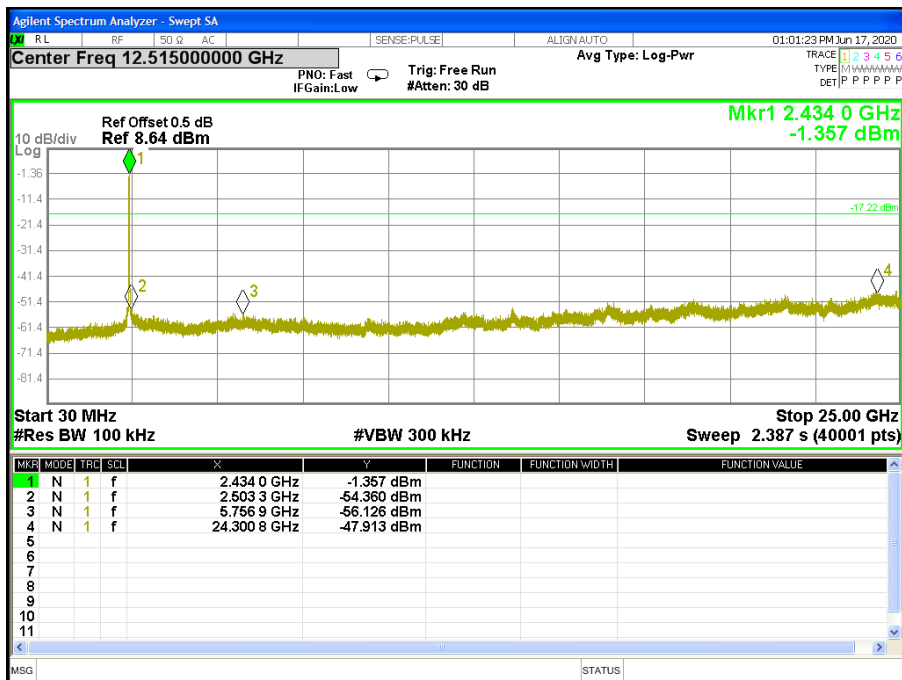


802.11g High CH, 2462MHz

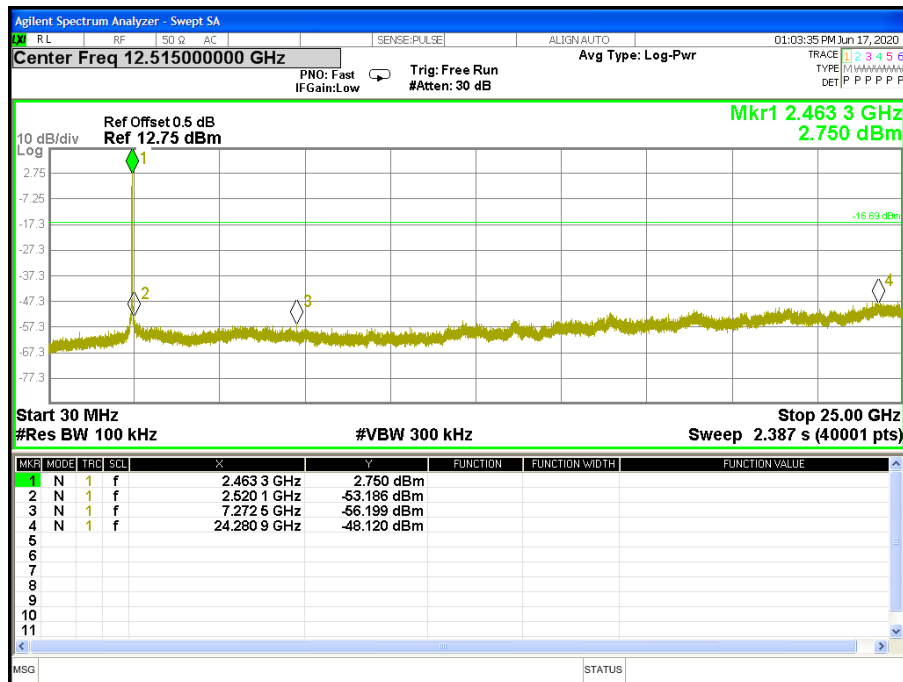


802.11n 20 Low CH, 2412MHz

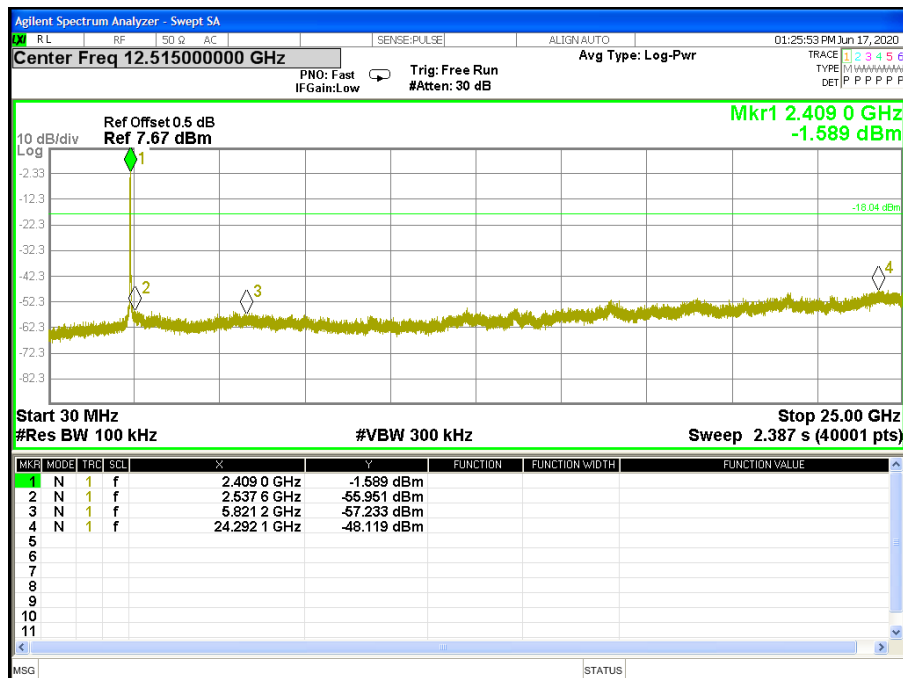


802.11n 20 Middle CH, 2437MHz

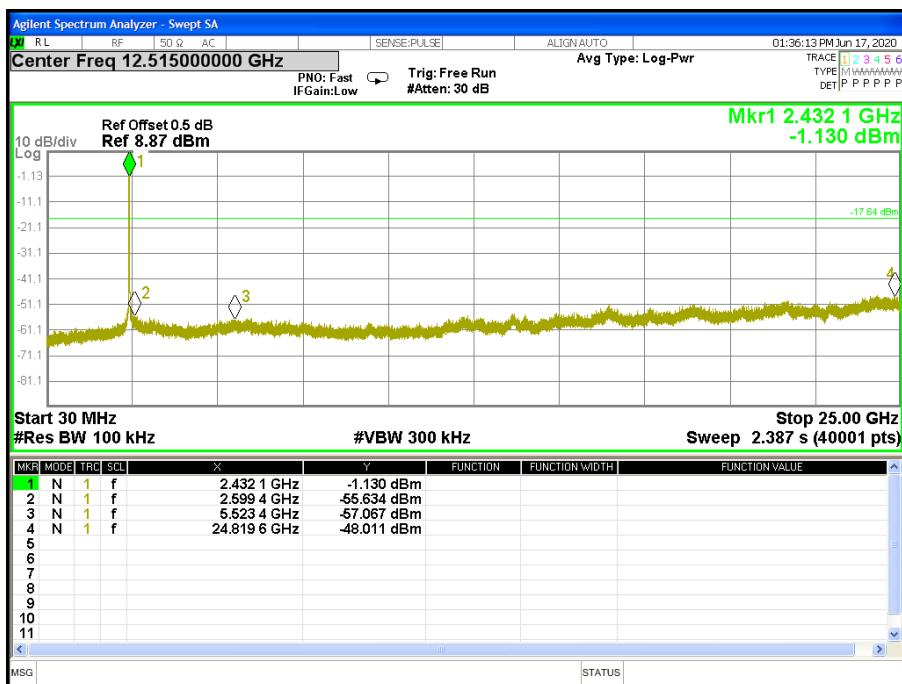


802.11n 20 High CH, 2462MHz

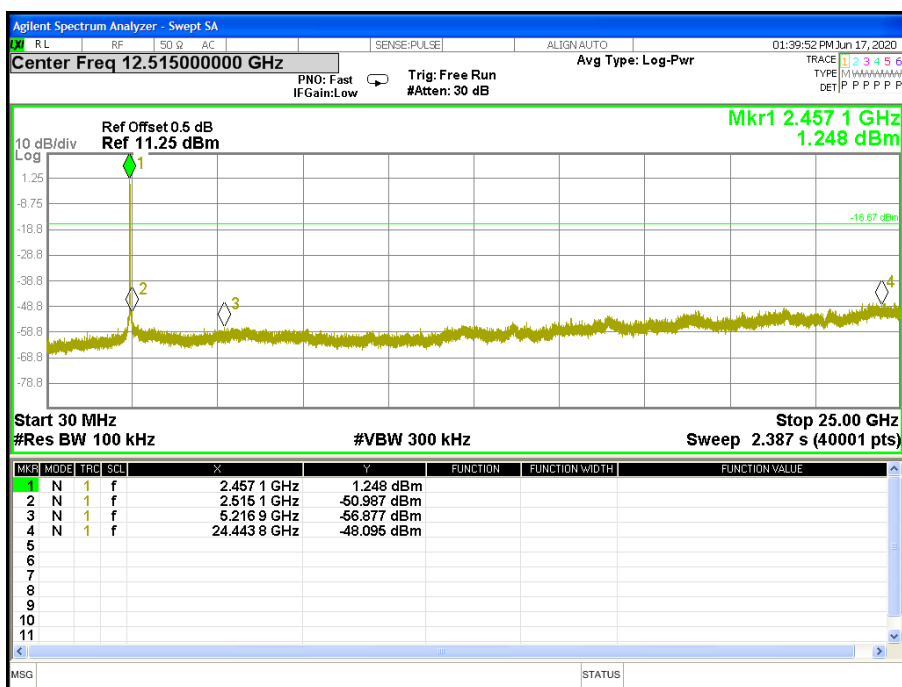


802.11n 40 Low CH, 2422MHz

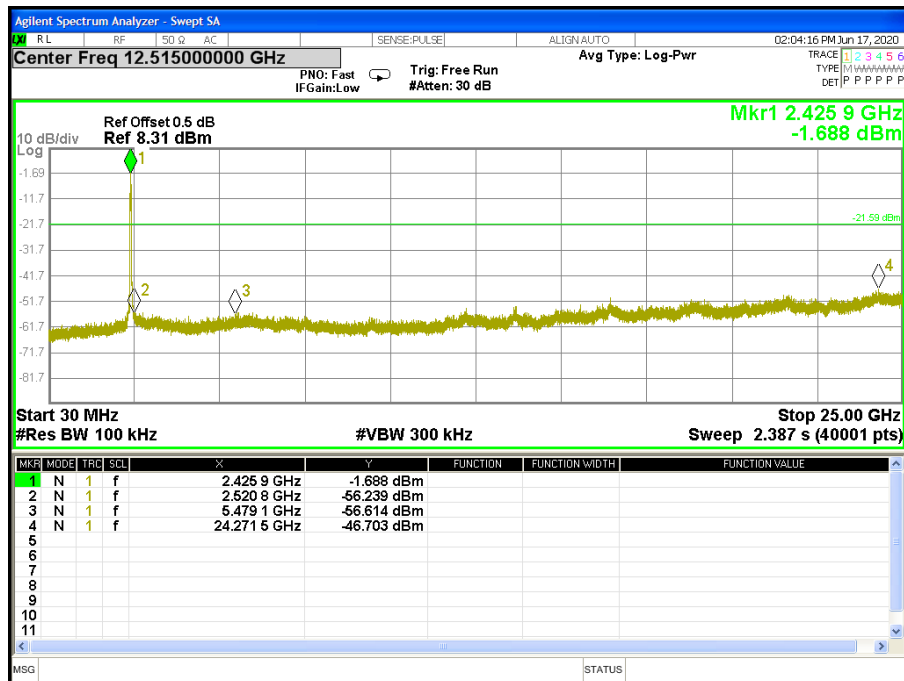

802.11n 40 Middle CH, 2437MHz

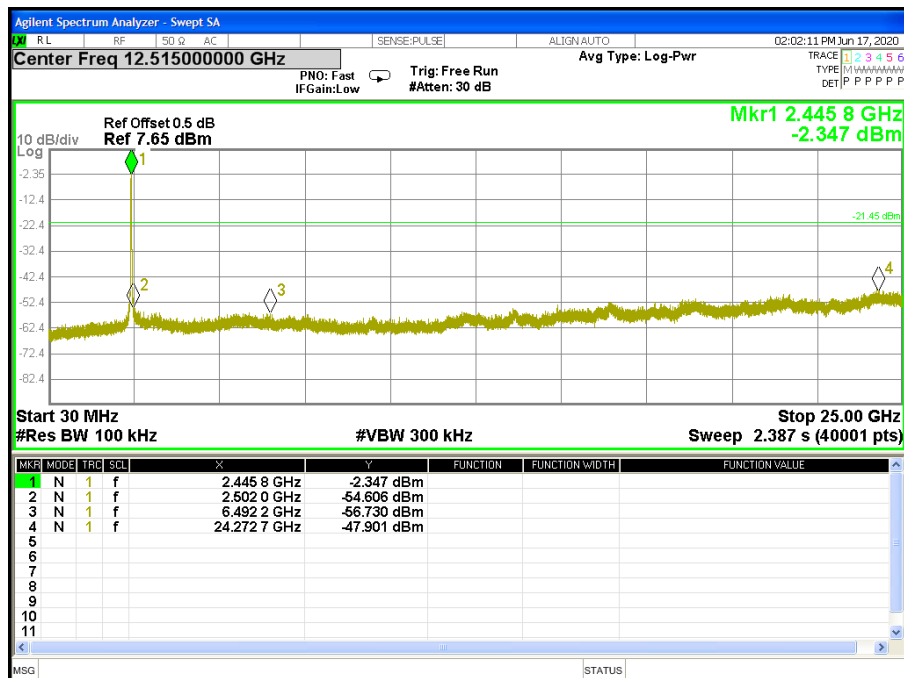

802.11n 40 High CH, 2452MHz

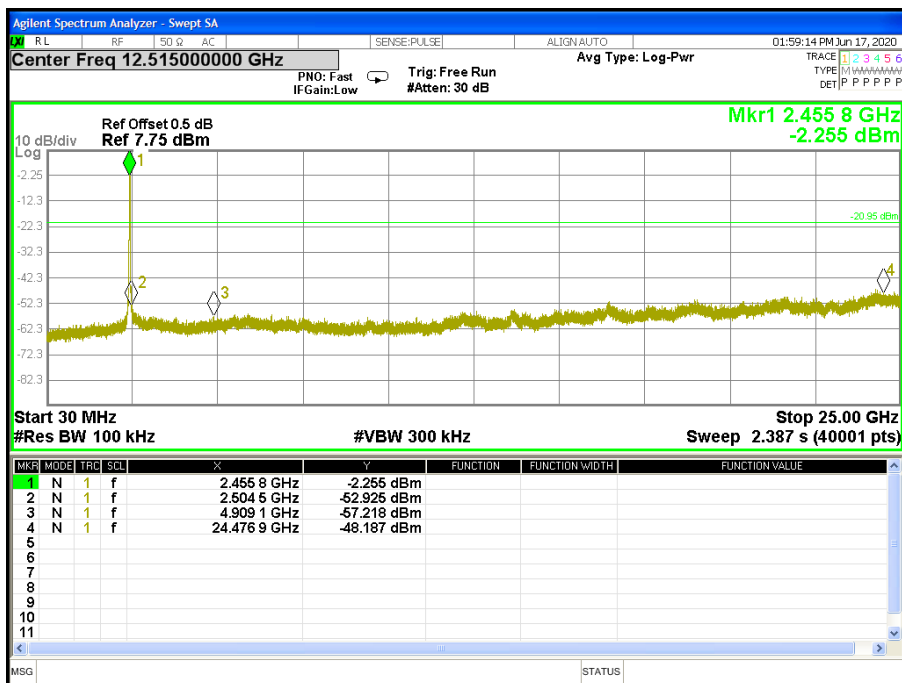

7 RADIATED EMISSION MEASUREMENT

7.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz / 10 Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

7.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

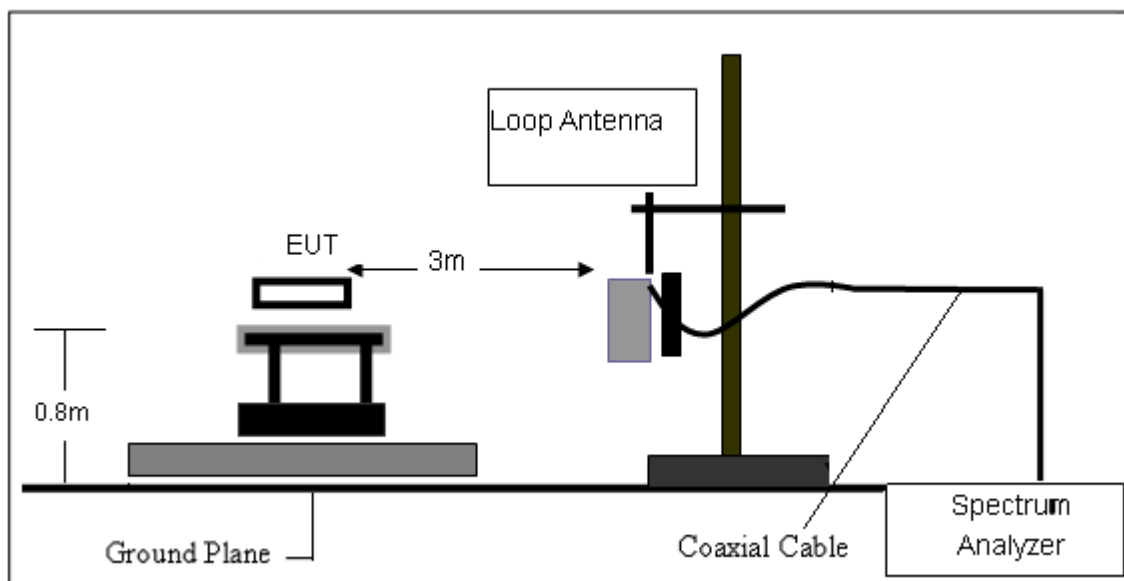

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

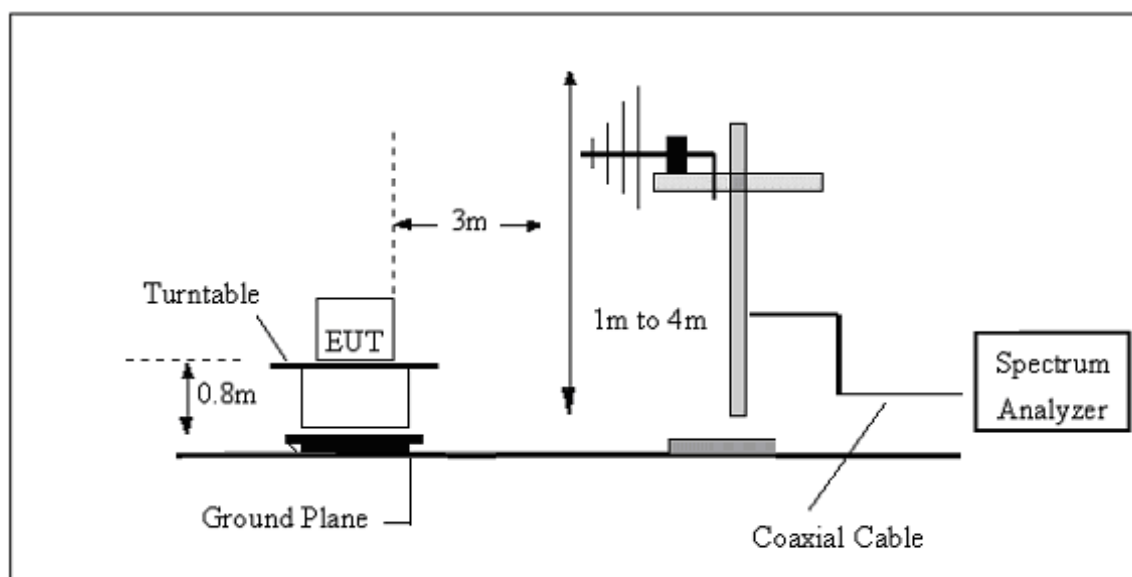

(C) Radiated Emission Test-Up Frequency Above 1GHz

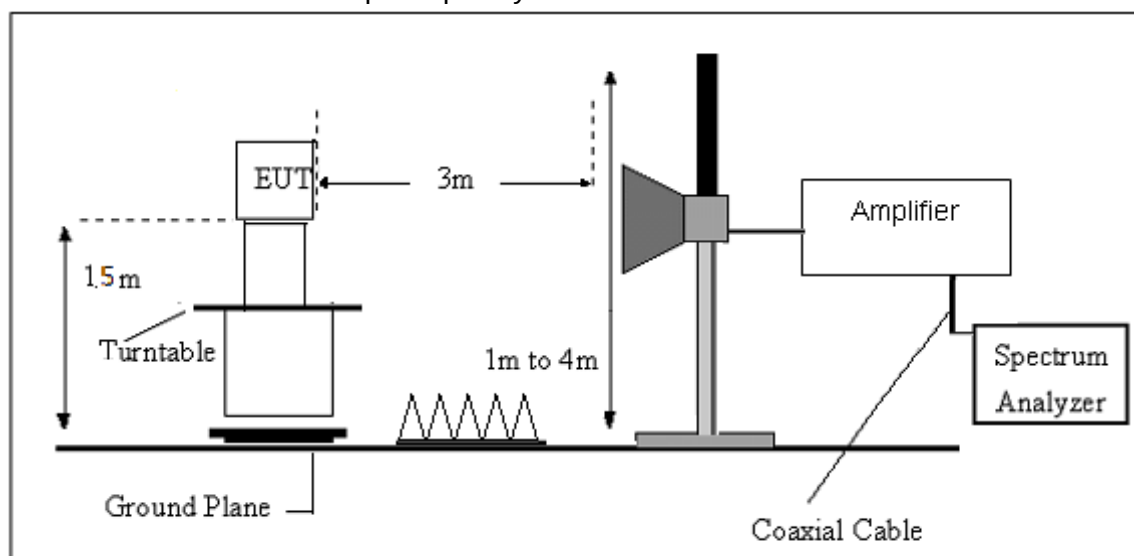

7.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	AC 120V,60HZ	Test Mode:	802.11b

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

(30MHz-1000MHz)


Temperature:	24.7°C	Relative Humidity:	61%
Test Voltage:	AC 120V/60HZ	Phase:	Horizontal
Test Mode:	802.11b(worst)		

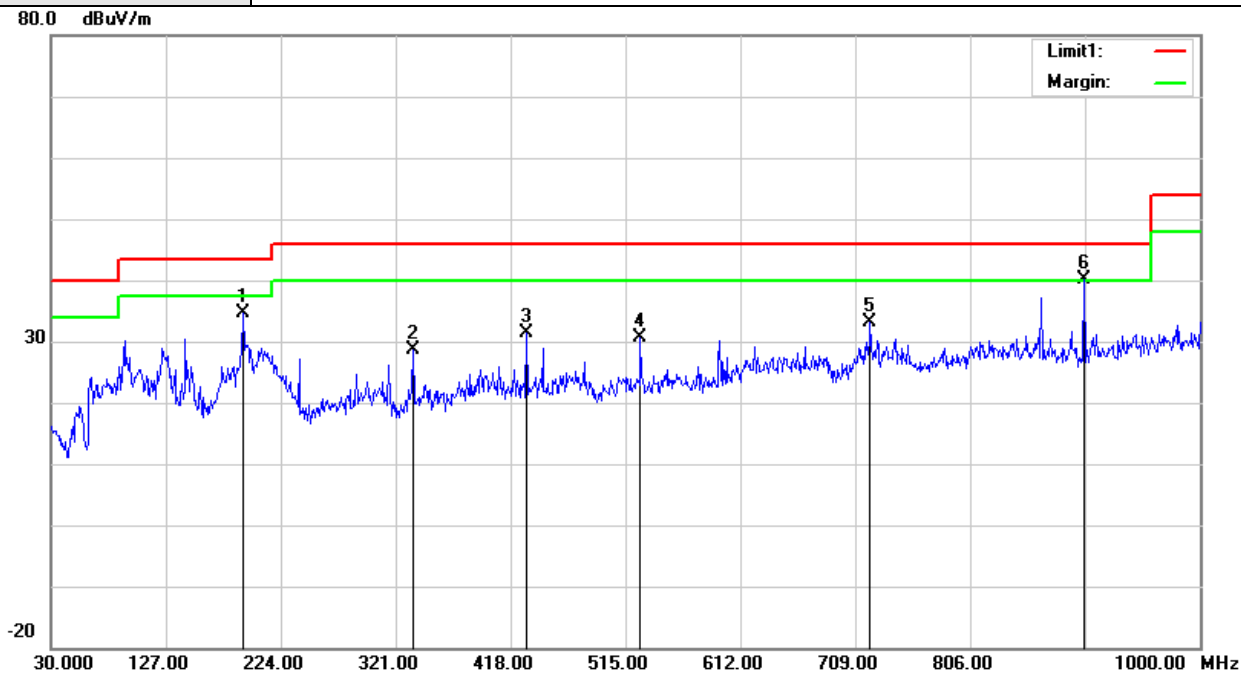

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	191.9900	55.65	-21.04	34.61	43.50	-8.89	QP
2	335.5500	42.28	-13.54	28.74	46.00	-17.26	QP
3	431.5800	41.61	-10.13	31.48	46.00	-14.52	QP
4	527.6100	38.26	-7.54	30.72	46.00	-15.28	QP
5	721.6100	36.15	-3.12	33.03	46.00	-12.97	QP
6	902.0300	40.48	-0.40	40.08	46.00	-5.92	QP

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	AC 100-240V/50HZ-60HZ	Phase:	Vertical
Test Mode:	ON		

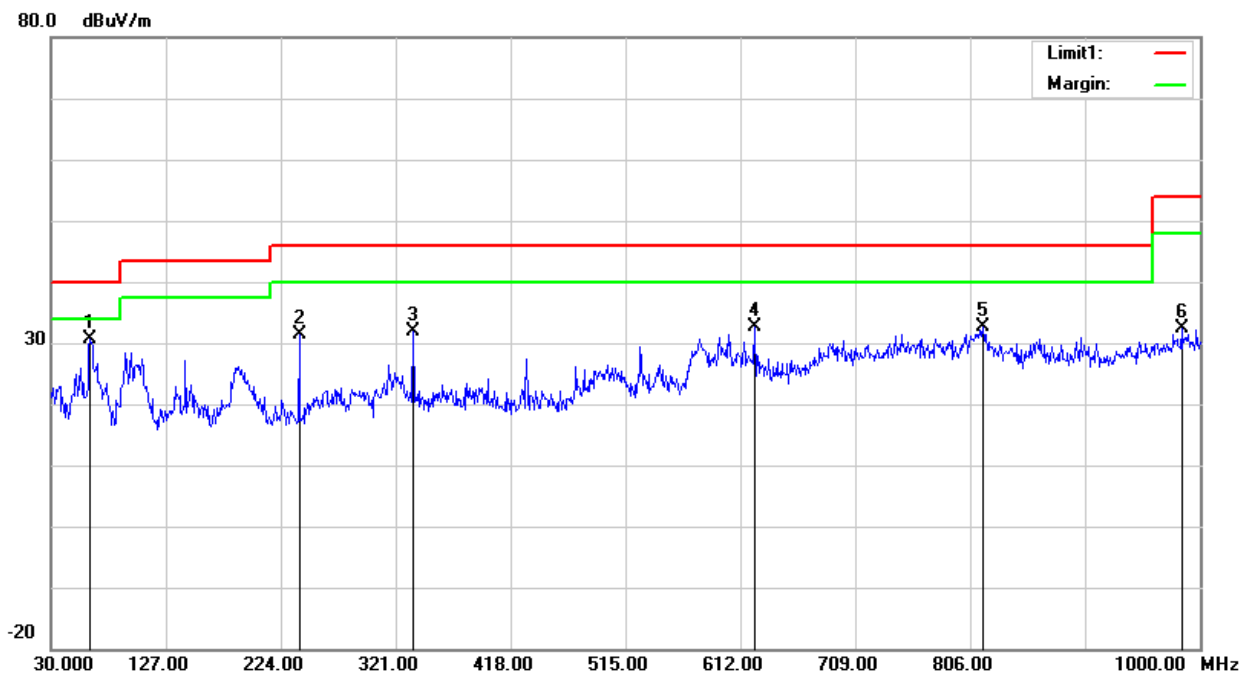


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	62.9800	56.42	-25.70	30.72	40.00	-9.28	QP
2	239.5200	49.47	-18.10	31.37	46.00	-14.63	QP
3	335.5500	45.47	-13.54	31.93	46.00	-14.07	QP
4	623.6400	37.85	-5.33	32.52	46.00	-13.48	QP
5	816.6700	34.50	-1.97	32.53	46.00	-13.47	QP
6	984.4800	29.92	2.40	32.32	54.00	-21.68	QP

(1GHz~25GHz) Restricted band and Spurious emission Requirements

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 01(2412MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11b	Humidity	: 56%


Horizontal

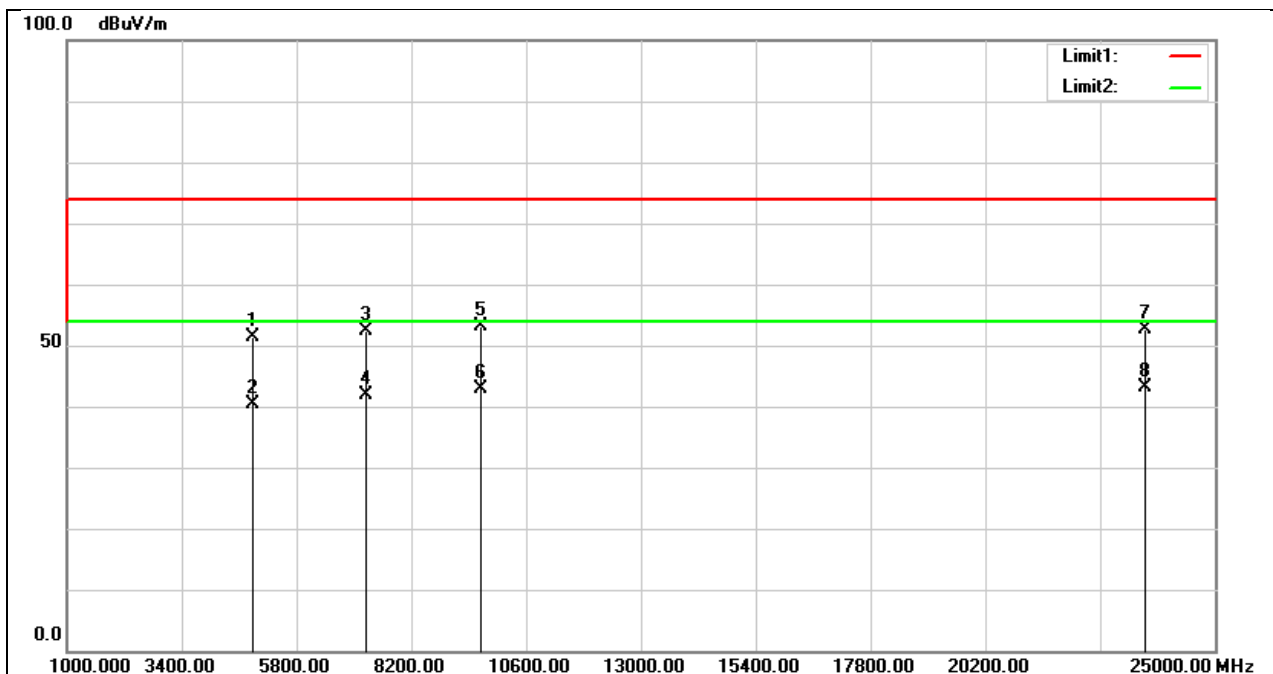

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.722	58.36	-6.94	51.42	74.00	-22.58	peak
2	4874.722	47.32	-6.94	40.38	54.00	-13.62	AVG
3	7255.534	51.57	0.73	52.30	74.00	-21.70	peak
4	7255.534	41.23	0.73	41.96	54.00	-12.04	AVG
5	9642.305	49.94	3.20	53.14	74.00	-20.86	peak
6	9642.305	39.64	3.20	42.84	54.00	-11.16	AVG
7	23544.206	37.03	15.57	52.60	74.00	-21.40	peak
8	23544.206	27.45	15.57	43.02	54.00	-10.98	AVG

Vertical

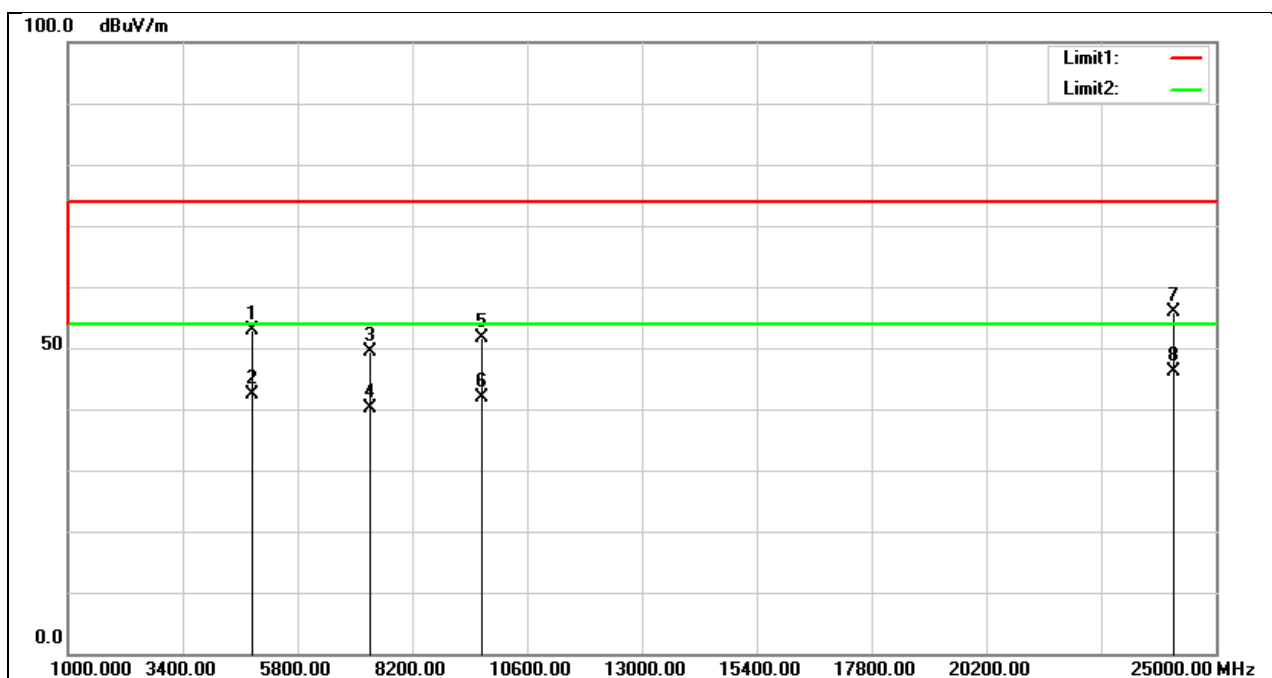


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4862.514	59.78	-6.98	52.80	74.00	-21.20	peak
2	4862.514	49.33	-6.98	42.35	54.00	-11.65	AVG
3	7315.320	48.53	0.95	49.48	74.00	-24.52	peak
4	7315.320	39.21	0.95	40.16	54.00	-13.84	AVG
5	9654.082	48.45	3.21	51.66	74.00	-22.34	peak
6	9654.082	38.73	3.21	41.94	54.00	-12.06	AVG
7	24112.546	39.68	16.22	55.90	74.00	-18.10	peak
8	24112.546	29.80	16.22	46.02	54.00	-7.98	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 06(2437MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11b	Humidity	: 56%


Horizontal

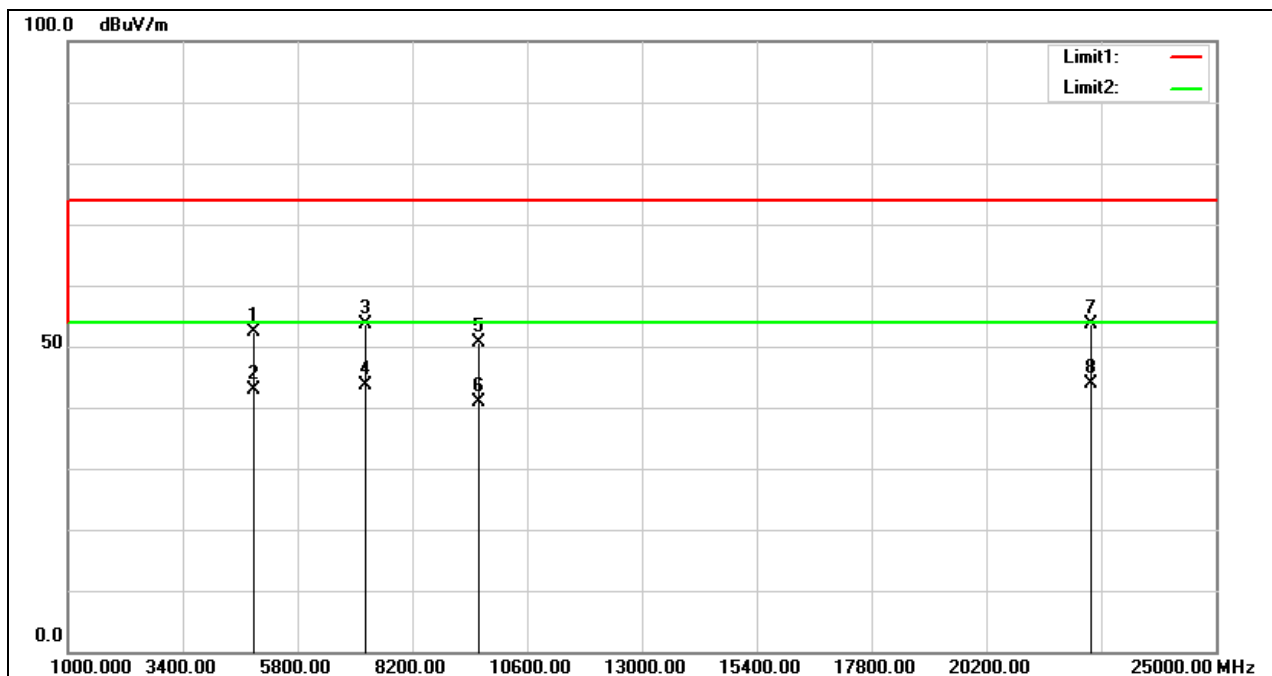

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4902.130	59.27	-6.83	52.44	74.00	-21.56	peak
2	4902.130	49.68	-6.83	42.85	54.00	-11.15	AVG
3	7208.320	53.05	0.56	53.61	74.00	-20.39	peak
4	7208.320	43.16	0.56	43.72	54.00	-10.28	AVG
5	9596.404	47.56	3.18	50.74	74.00	-23.26	peak
6	9596.404	37.68	3.18	40.86	54.00	-13.14	AVG
7	22385.524	42.04	11.56	53.60	74.00	-20.40	peak
8	22385.524	32.26	11.56	43.82	54.00	-10.18	AVG

Vertical

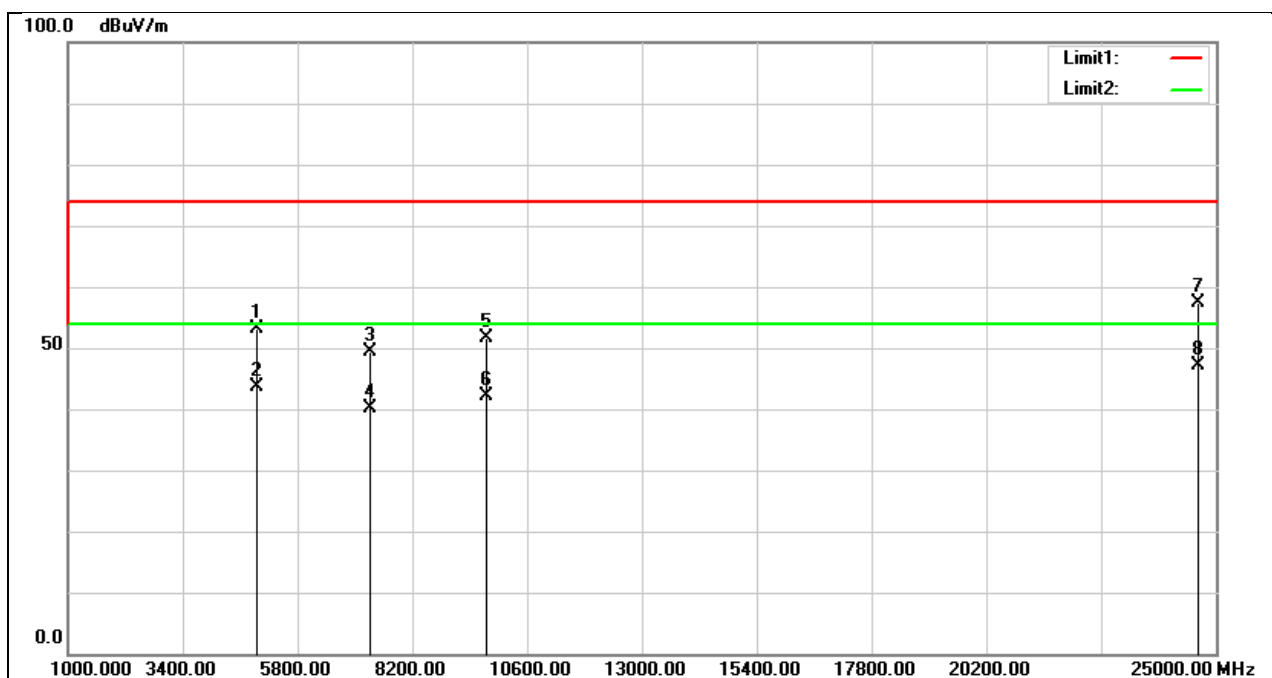


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.065	59.68	-6.45	53.23	74.00	-20.77	peak
2	4960.065	49.97	-6.45	43.52	54.00	-10.48	AVG
3	7312.571	48.32	0.95	49.27	74.00	-24.73	peak
4	7312.571	39.17	0.95	40.12	54.00	-13.88	AVG
5	9760.114	48.32	3.25	51.57	74.00	-22.43	peak
6	9760.114	38.91	3.25	42.16	54.00	-11.84	AVG
7	24640.610	40.66	16.67	57.33	74.00	-16.67	peak
8	24640.610	30.57	16.67	47.24	54.00	-6.76	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 11(2462MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11b	Humidity	: 56%


Horizontal

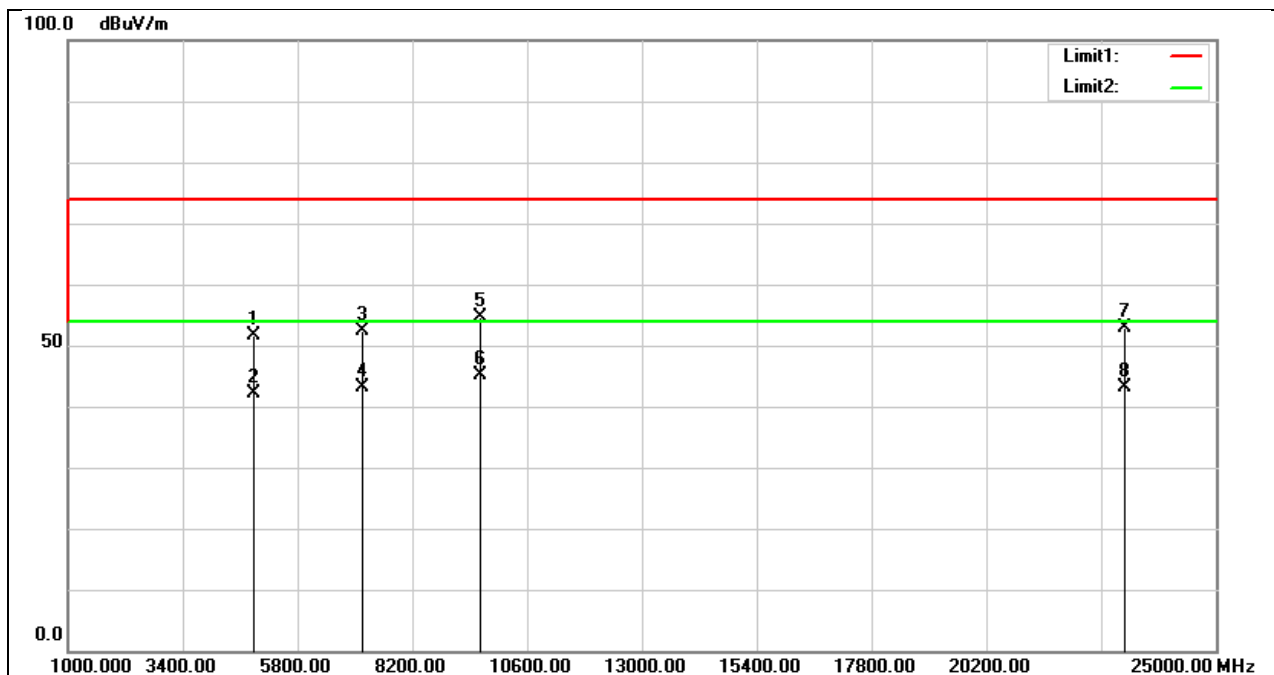

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4902.328	58.43	-6.83	51.60	74.00	-22.40	peak
2	4902.328	48.90	-6.83	42.07	54.00	-11.93	AVG
3	7168.350	51.95	0.41	52.36	74.00	-21.64	peak
4	7168.350	42.71	0.41	43.12	54.00	-10.88	AVG
5	9621.308	51.55	3.19	54.74	74.00	-19.26	peak
6	9621.308	41.98	3.19	45.17	54.00	-8.83	AVG
7	23106.804	37.80	15.04	52.84	74.00	-21.16	peak
8	23106.804	28.10	15.04	43.14	54.00	-10.86	AVG

Vertical

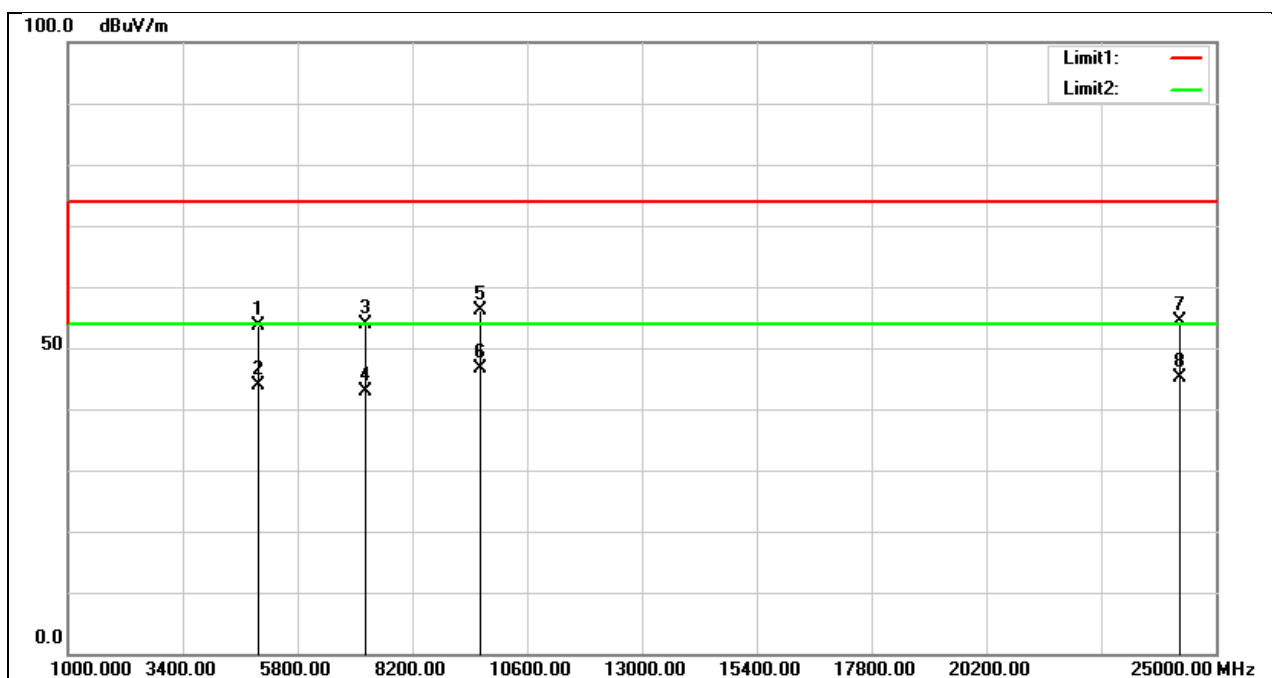


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4984.812	59.95	-6.29	53.66	74.00	-20.34	peak
2	4984.812	50.09	-6.29	43.80	54.00	-10.20	AVG
3	7216.196	53.17	0.59	53.76	74.00	-20.24	peak
4	7216.196	42.35	0.59	42.94	54.00	-11.06	AVG
5	9616.515	52.91	3.19	56.10	74.00	-17.90	peak
6	9616.515	43.33	3.19	46.52	54.00	-7.48	AVG
7	24256.350	38.00	16.34	54.34	74.00	-19.66	peak
8	24256.350	28.87	16.34	45.21	54.00	-8.79	AVG

+

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 01(2412MHz)	Temperature	: 22.8°C
Modulation Type	: 802.11g	Humidity	: 56%


Horizontal

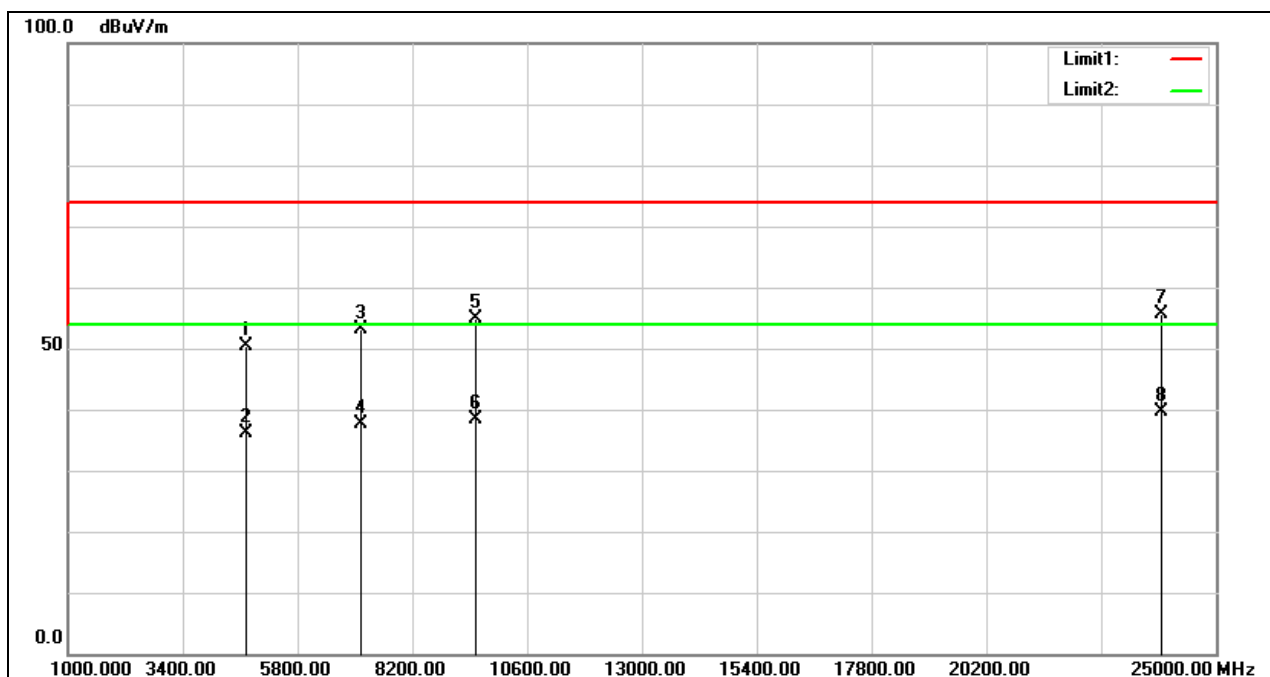

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4720.000	57.67	-7.33	50.34	74.00	-23.66	peak
2	4720.000	43.43	-7.33	36.10	54.00	-17.90	AVG
3	7120.000	53.00	0.24	53.24	74.00	-20.76	peak
4	7120.000	37.41	0.24	37.65	54.00	-16.35	AVG
5	9520.000	51.64	3.14	54.78	74.00	-19.22	peak
6	9520.000	35.32	3.14	38.46	54.00	-15.54	AVG
7	23872.000	39.64	15.97	55.61	74.00	-18.39	peak
8	23872.000	23.67	15.97	39.64	54.00	-14.36	AVG

Vertical

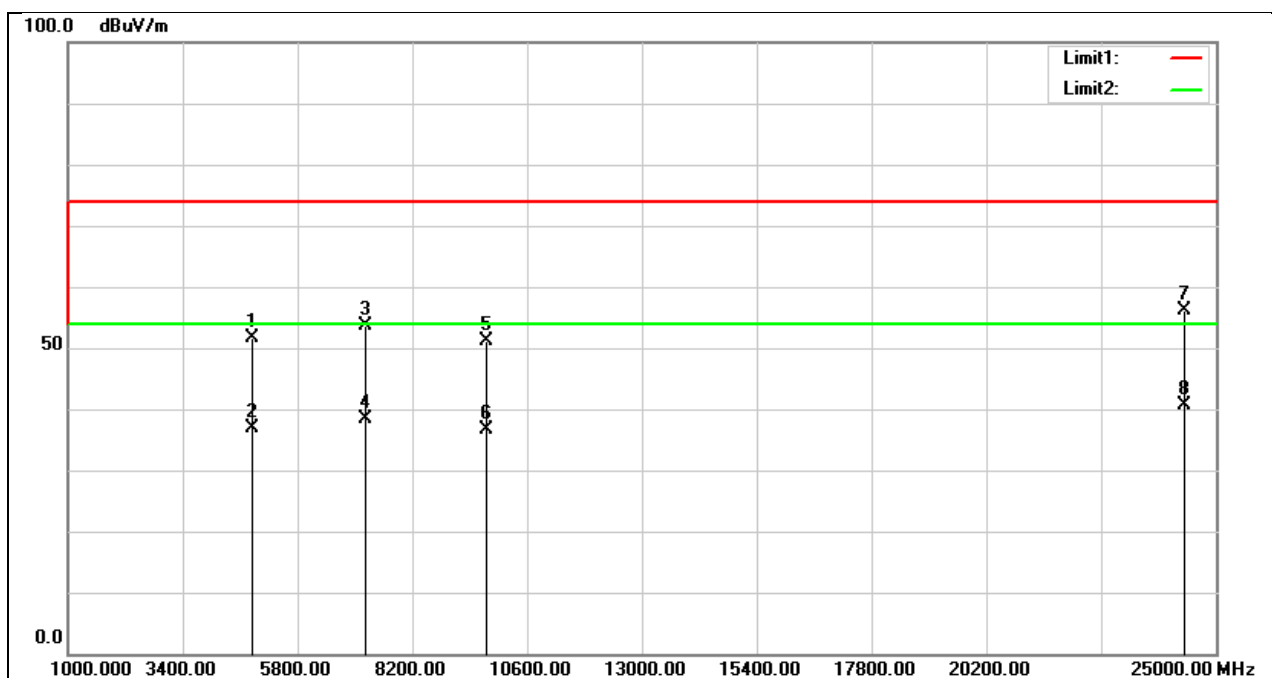


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4864.000	58.71	-6.97	51.74	74.00	-22.26	peak
2	4864.000	43.82	-6.97	36.85	54.00	-17.15	AVG
3	7216.000	53.04	0.59	53.63	74.00	-20.37	peak
4	7216.000	37.67	0.59	38.26	54.00	-15.74	AVG
5	9760.000	47.95	3.25	51.20	74.00	-22.80	peak
6	9760.000	33.49	3.25	36.74	54.00	-17.26	AVG
7	24352.000	39.80	16.42	56.22	74.00	-17.78	peak
8	24352.000	24.24	16.42	40.66	54.00	-13.34	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 06(2437MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11g	Humidity	: 56%


Horizontal

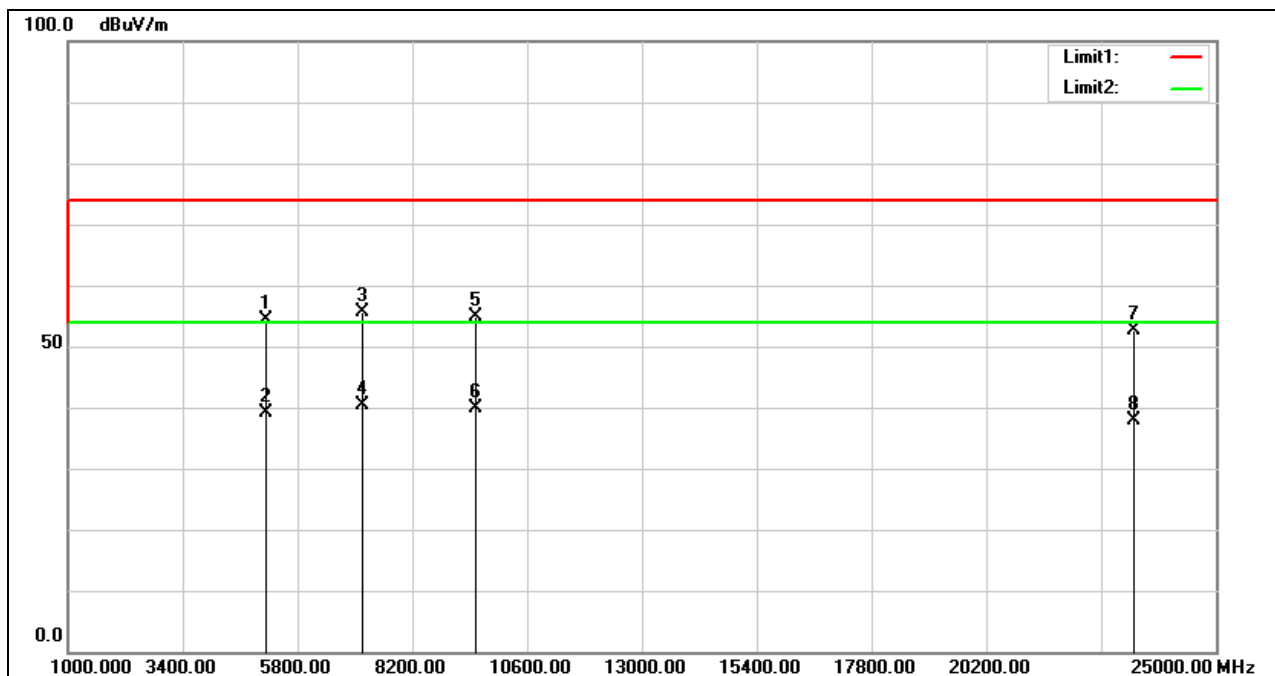

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5152.000	60.21	-5.74	54.47	74.00	-19.53	peak
2	5152.000	44.89	-5.74	39.15	54.00	-14.85	AVG
3	7168.000	55.15	0.41	55.56	74.00	-18.44	peak
4	7168.000	39.91	0.41	40.32	54.00	-13.68	AVG
5	9520.000	51.64	3.14	54.78	74.00	-19.22	peak
6	9520.000	36.68	3.14	39.82	54.00	-14.18	AVG
7	23296.000	37.47	15.27	52.74	74.00	-21.26	peak
8	23296.000	22.69	15.27	37.96	54.00	-16.04	AVG

Vertical

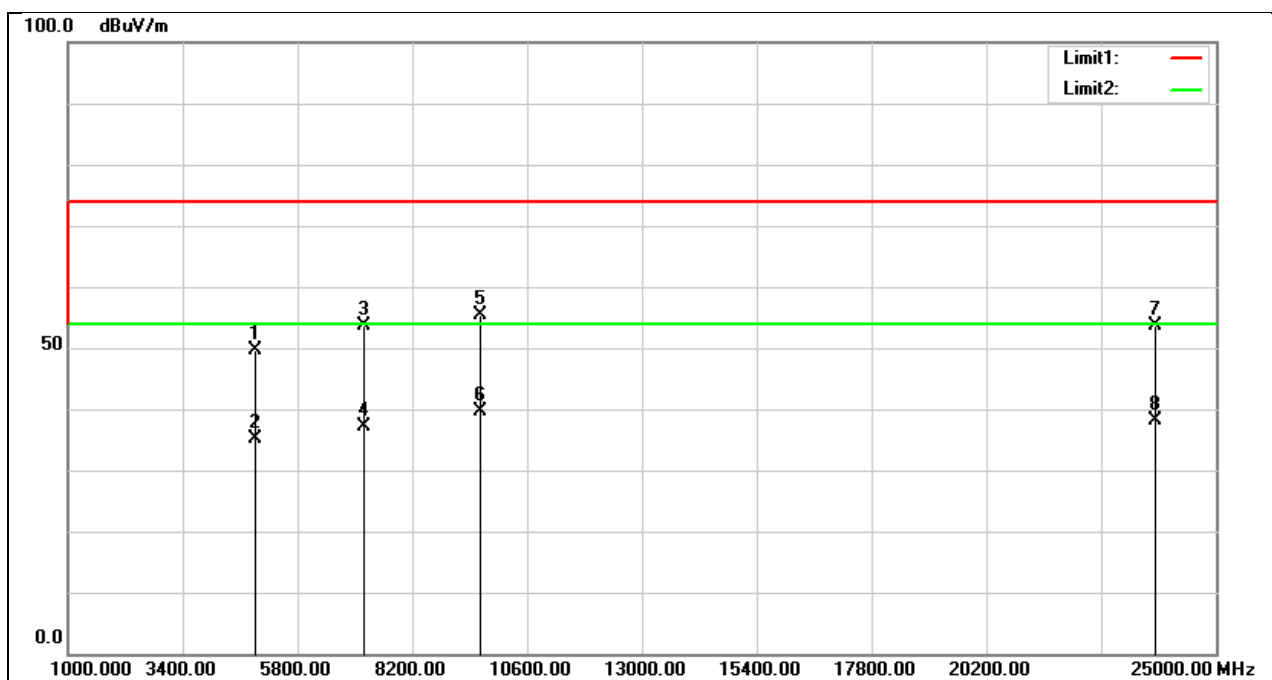


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4912.000	56.35	-6.77	49.58	74.00	-24.42	peak
2	4912.000	42.01	-6.77	35.24	54.00	-18.76	AVG
3	7192.000	53.04	0.50	53.54	74.00	-20.46	peak
4	7192.000	36.68	0.50	37.18	54.00	-16.82	AVG
5	9616.000	52.31	3.19	55.50	74.00	-18.50	peak
6	9616.000	36.45	3.19	39.64	54.00	-14.36	AVG
7	23728.000	37.74	15.79	53.53	74.00	-20.47	peak
8	23728.000	22.43	15.79	38.22	54.00	-15.78	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 11(2462MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11g	Humidity	: 56%


Horizontal

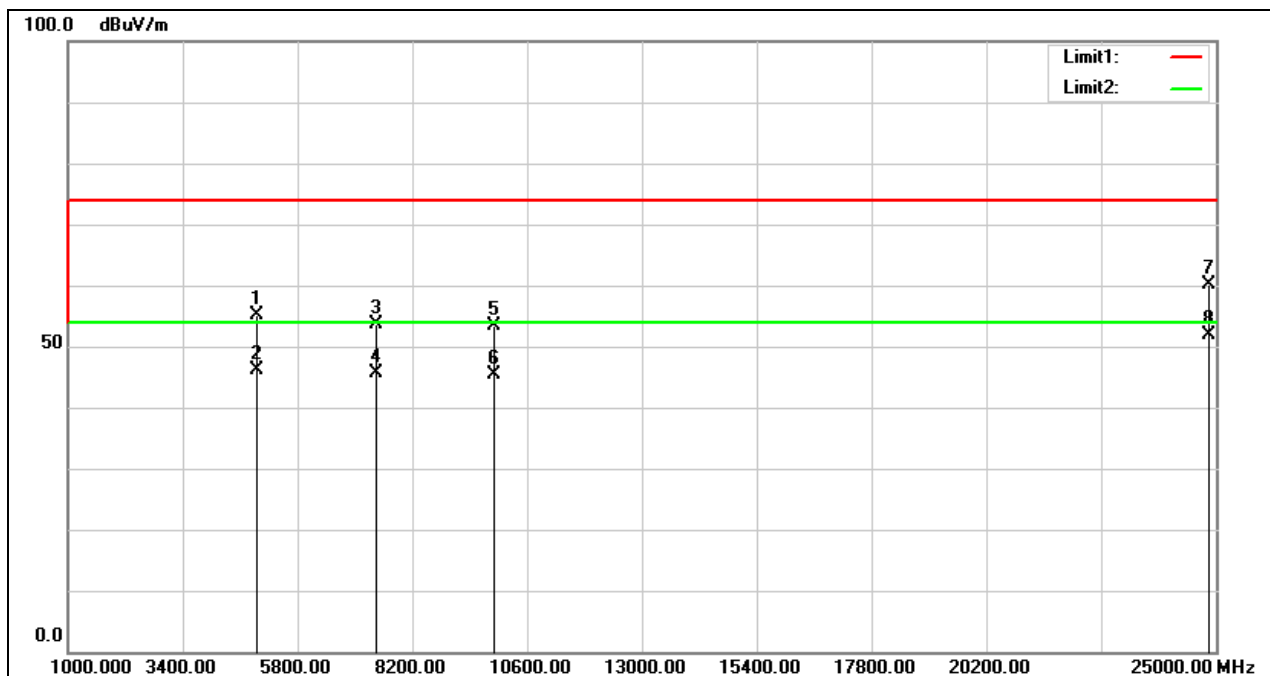

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4964.616	23.49	31.53	55.02	74.00	-18.98	peak
2	4964.616	14.60	31.53	46.13	54.00	-7.87	AVG
3	7440.660	17.54	36.16	53.70	74.00	-20.30	peak
4	7440.660	9.38	36.16	45.54	54.00	-8.46	AVG
5	9920.465	15.46	38.04	53.50	74.00	-20.50	peak
6	9920.465	7.28	38.04	45.32	54.00	-8.68	AVG
7	24865.190	7.55	52.50	60.05	74.00	-13.95	peak
8	24865.190	-0.54	52.50	51.96	54.00	-2.04	AVG

Vertical

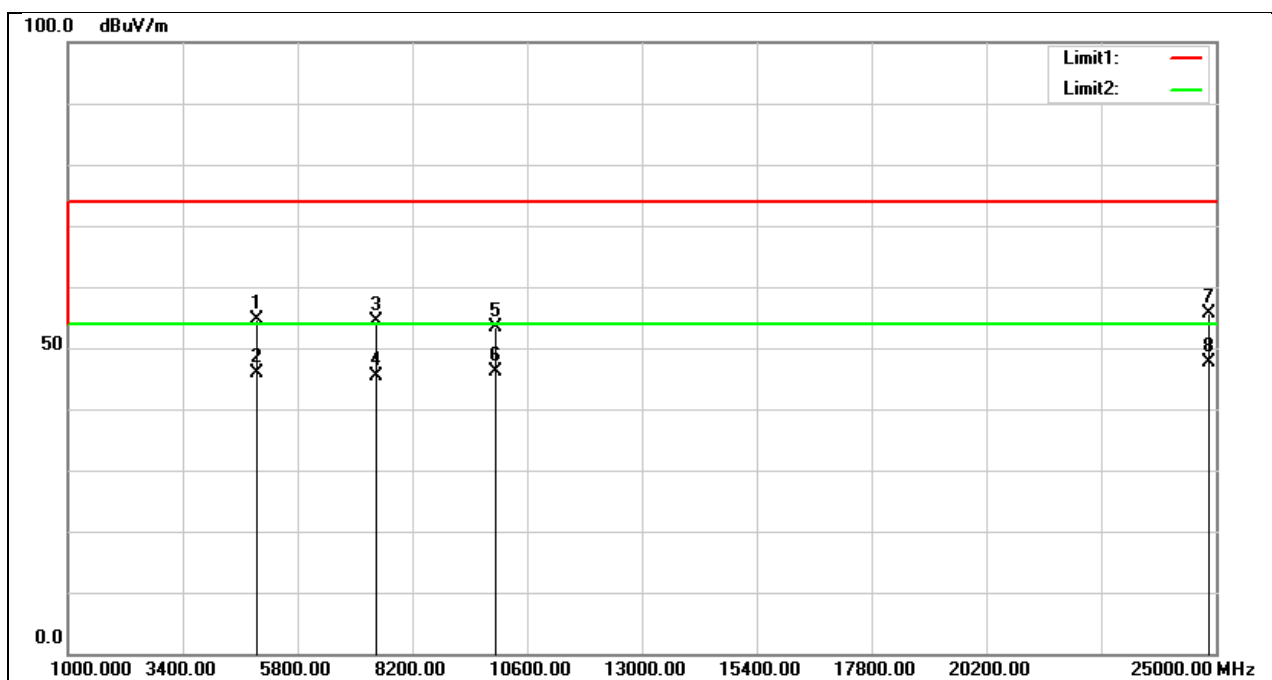


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4967.052	23.14	31.53	54.67	74.00	-19.33	peak
2	4967.052	14.32	31.53	45.85	54.00	-8.15	AVG
3	7449.510	18.25	36.17	54.42	74.00	-19.58	peak
4	7449.510	9.21	36.17	45.38	54.00	-8.62	AVG
5	9929.456	15.27	38.05	53.32	74.00	-20.68	peak
6	9929.456	8.14	38.05	46.19	54.00	-7.81	AVG
7	24851.165	3.10	52.50	55.60	74.00	-18.40	peak
8	24851.165	-4.76	52.50	47.74	54.00	-6.26	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 01(2412MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11n,HT20	Humidity	: 56%


Horizontal

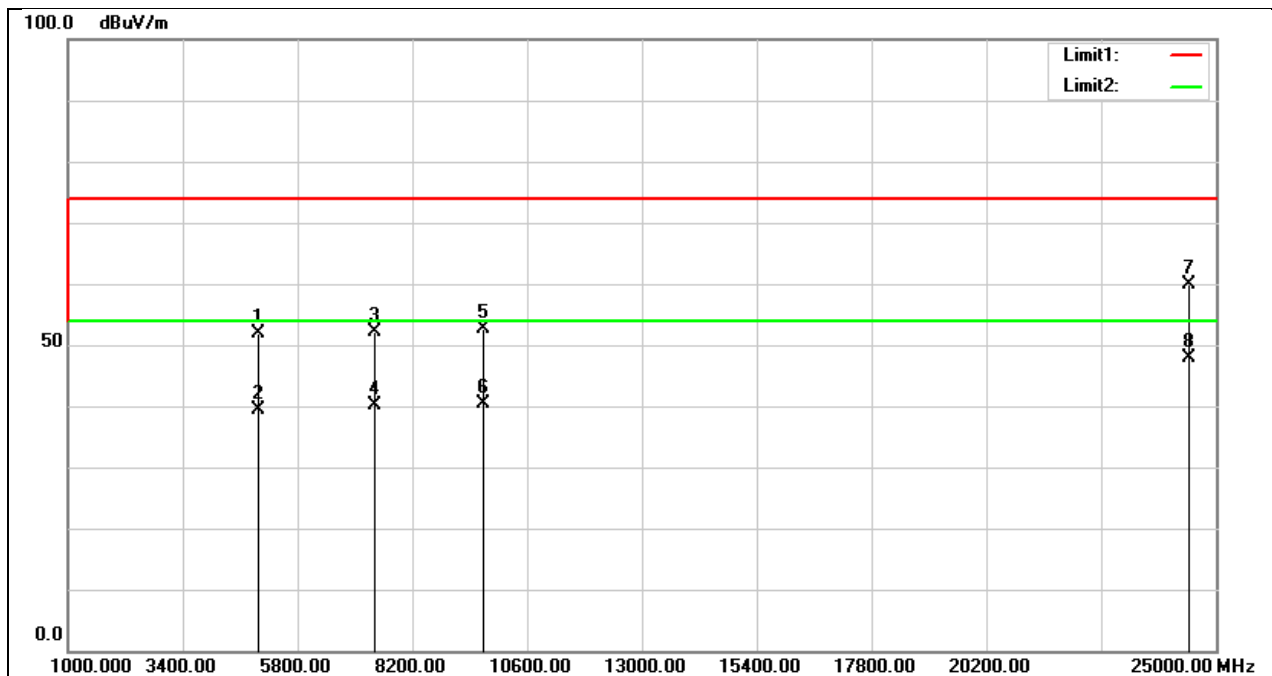

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4984.000	58.05	-6.29	51.76	74.00	-22.24	peak
2	4984.000	45.71	-6.29	39.42	54.00	-14.58	AVG
3	7408.000	50.81	1.29	52.10	74.00	-21.90	peak
4	7408.000	38.95	1.29	40.24	54.00	-13.76	AVG
5	9688.000	49.29	3.22	52.51	74.00	-21.49	peak
6	9688.000	37.12	3.22	40.34	54.00	-13.66	AVG
7	24448.000	43.26	16.51	59.77	74.00	-14.23	peak
8	24448.000	31.33	16.51	47.84	54.00	-6.16	AVG

Vertical

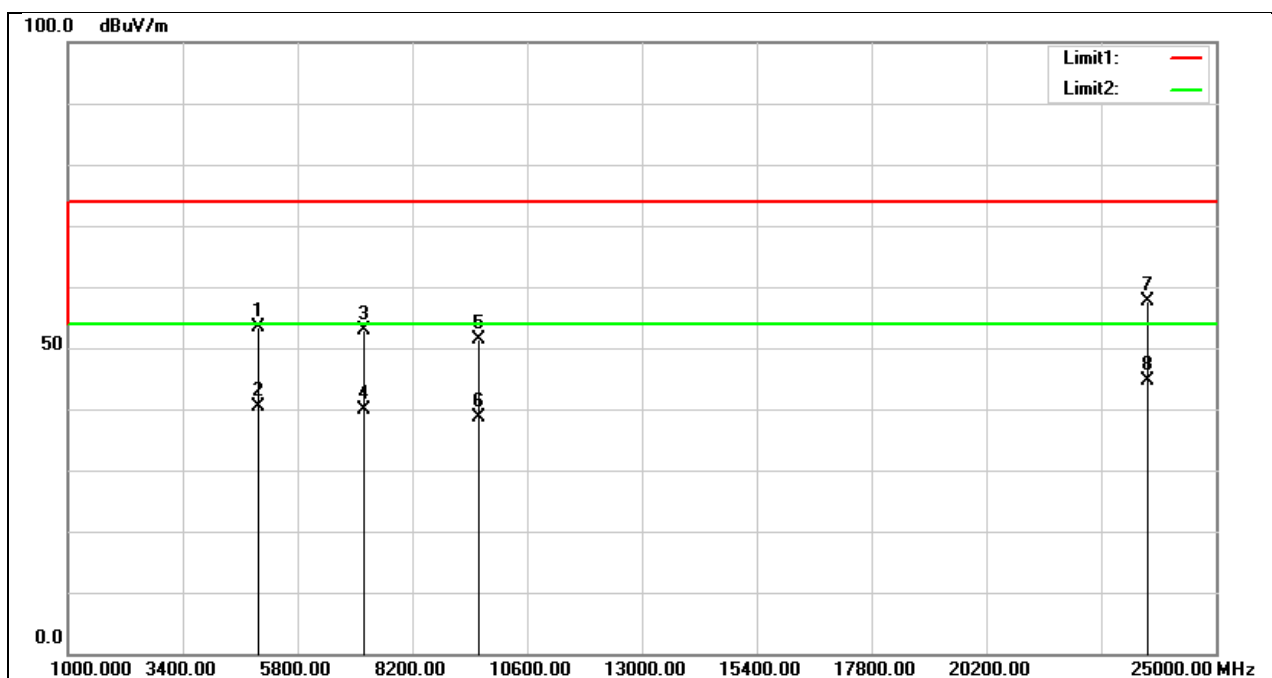


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4984.000	59.59	-6.29	53.30	74.00	-20.70	peak
2	4984.000	46.55	-6.29	40.26	54.00	-13.74	AVG
3	7192.000	52.44	0.50	52.94	74.00	-21.06	peak
4	7192.000	39.34	0.50	39.84	54.00	-14.16	AVG
5	9592.000	48.26	3.18	51.44	74.00	-22.56	peak
6	9592.000	35.36	3.18	38.54	54.00	-15.46	AVG
7	23584.000	42.01	15.62	57.63	74.00	-16.37	peak
8	23584.000	28.96	15.62	44.58	54.00	-9.42	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 06(2437MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11n,HT20	Humidity	: 56%


Horizontal

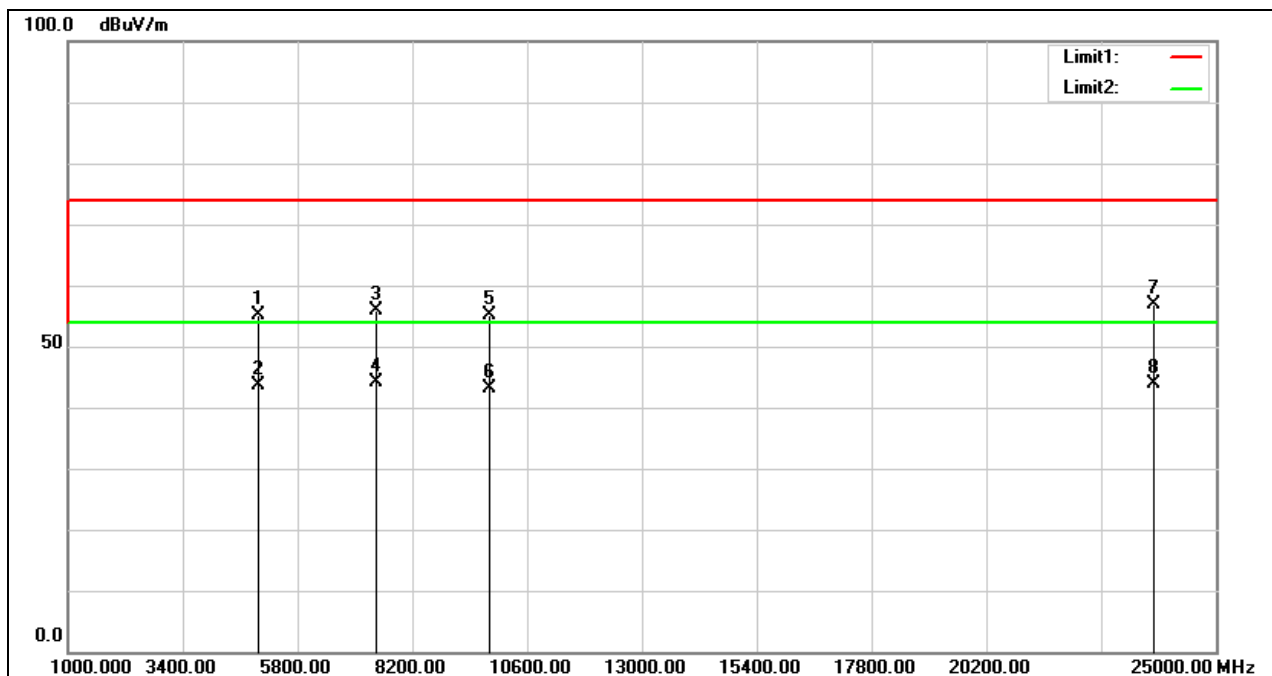

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4984.000	61.44	-6.29	55.15	74.00	-18.85	peak
2	4984.000	49.93	-6.29	43.64	54.00	-10.36	AVG
3	7456.000	54.37	1.46	55.83	74.00	-18.17	peak
4	7456.000	42.76	1.46	44.22	54.00	-9.78	AVG
5	9808.000	51.95	3.28	55.23	74.00	-18.77	peak
6	9808.000	39.90	3.28	43.18	54.00	-10.82	AVG
7	23704.000	41.04	15.76	56.80	74.00	-17.20	peak
8	23704.000	28.03	15.76	43.79	54.00	-10.21	AVG

Vertical

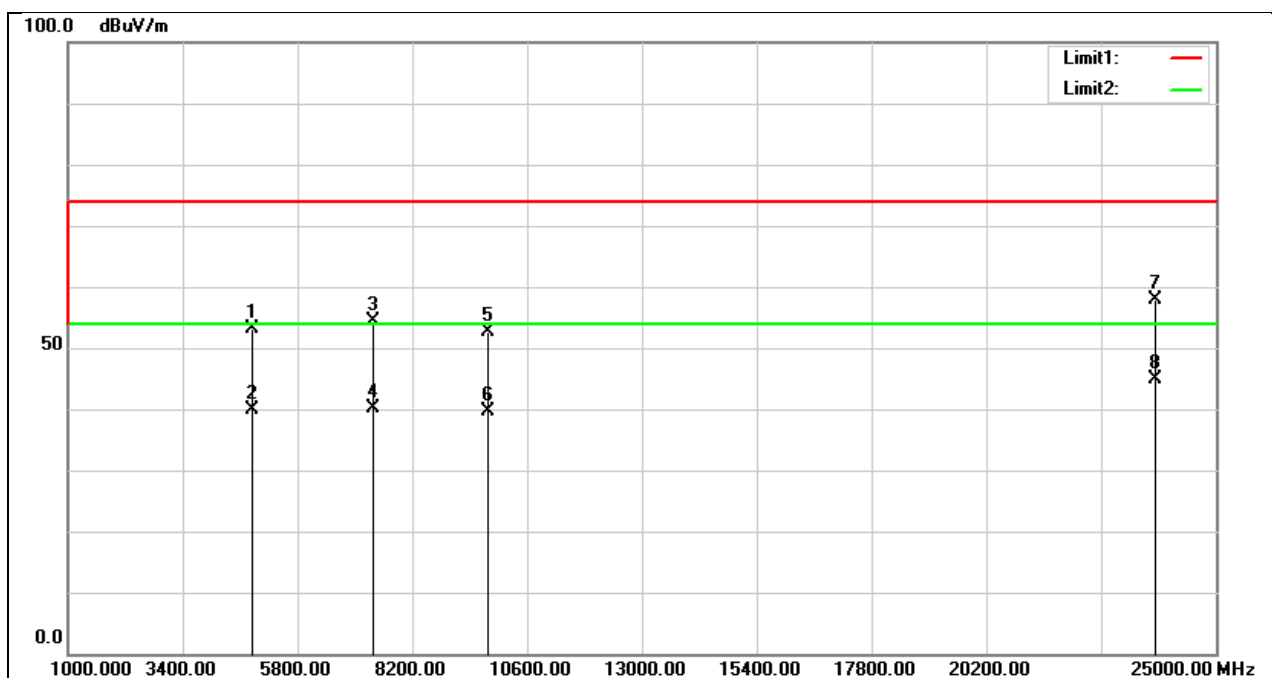


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4864.000	60.02	-6.97	53.05	74.00	-20.95	peak
2	4864.000	46.75	-6.97	39.78	54.00	-14.22	AVG
3	7384.000	53.14	1.21	54.35	74.00	-19.65	peak
4	7384.000	39.04	1.21	40.25	54.00	-13.75	AVG
5	9784.000	49.36	3.27	52.63	74.00	-21.37	peak
6	9784.000	36.35	3.27	39.62	54.00	-14.38	AVG
7	23728.000	42.01	15.79	57.80	74.00	-16.20	peak
8	23728.000	29.13	15.79	44.92	54.00	-9.08	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 11(2462MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11n,HT20	Humidity	: 56%


Horizontal

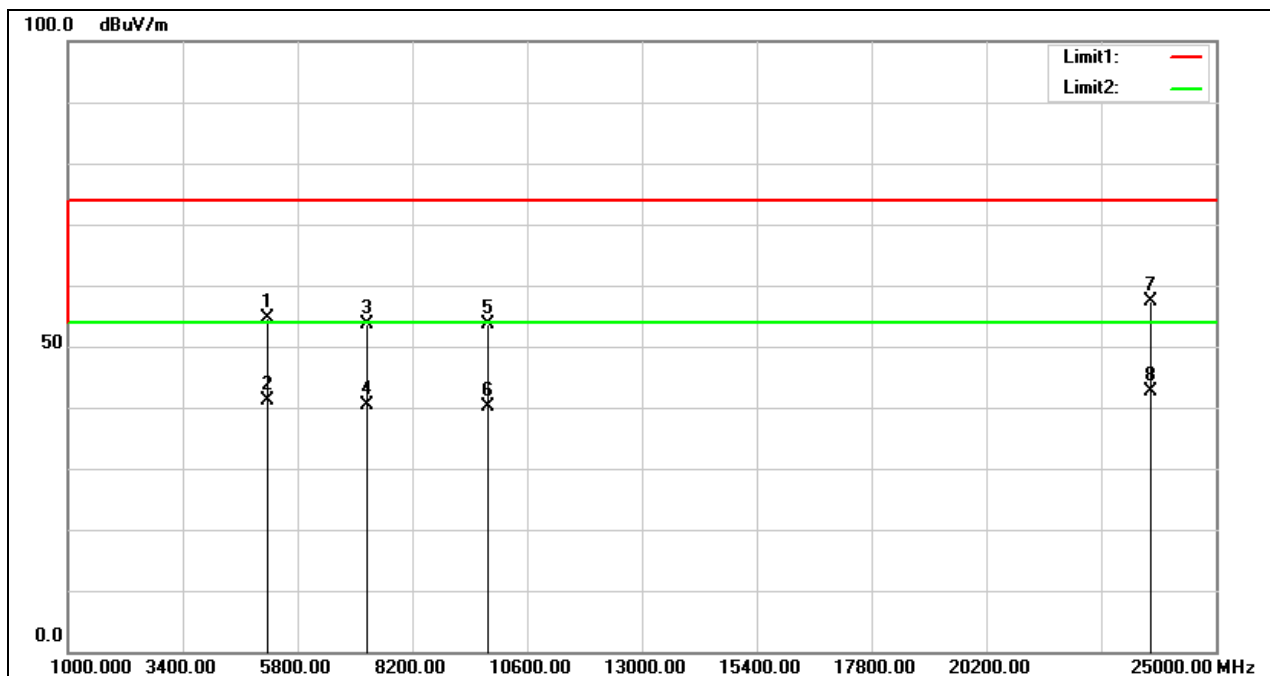

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5176.000	60.30	-5.73	54.57	74.00	-19.43	peak
2	5176.000	46.95	-5.73	41.22	54.00	-12.78	AVG
3	7264.000	52.86	0.77	53.63	74.00	-20.37	peak
4	7264.000	39.61	0.77	40.38	54.00	-13.62	AVG
5	9784.000	50.25	3.27	53.52	74.00	-20.48	peak
6	9784.000	36.92	3.27	40.19	54.00	-13.81	AVG
7	23632.000	29.60	27.67	57.27	74.00	-16.73	peak
8	23632.000	15.01	27.67	42.68	54.00	-11.32	AVG

Vertical

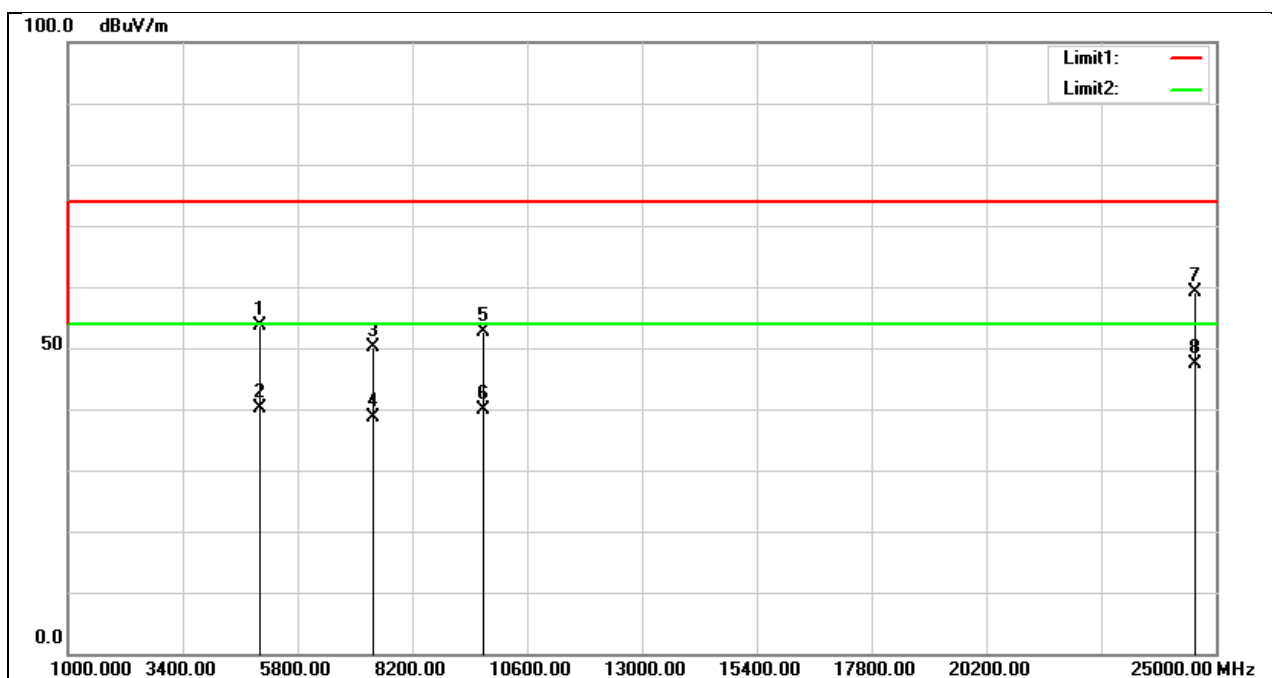


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5008.000	59.81	-6.15	53.66	74.00	-20.34	peak
2	5008.000	46.27	-6.15	40.12	54.00	-13.88	AVG
3	7384.000	48.92	1.21	50.13	74.00	-23.87	peak
4	7384.000	37.46	1.21	38.67	54.00	-15.33	AVG
5	9688.000	49.48	3.22	52.70	74.00	-21.30	peak
6	9688.000	36.76	3.22	39.98	54.00	-14.02	AVG
7	24568.000	42.58	16.61	59.19	74.00	-14.81	peak
8	24568.000	30.77	16.61	47.38	54.00	-6.62	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 01(2422MHz)	Temperature	: 22.8°C
Modulation Type	: 802.11n,HT40	Humidity	: 56%


Horizontal

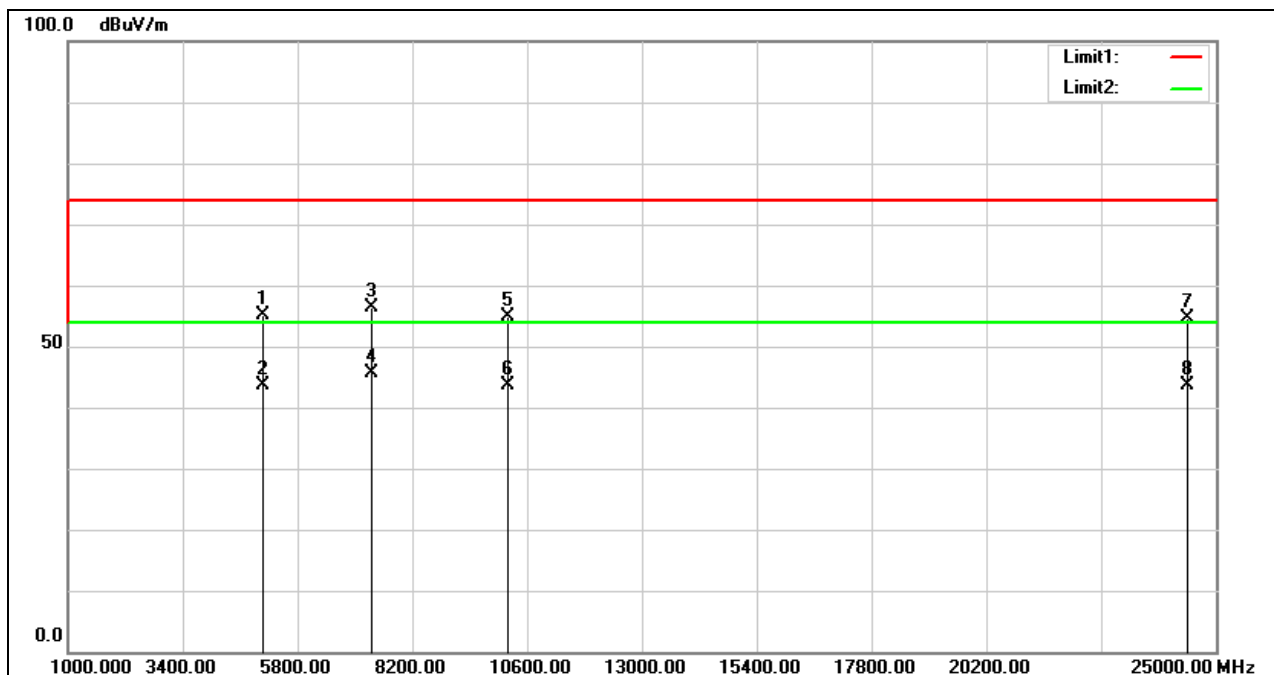

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5080.000	61.01	-5.83	55.18	74.00	-18.82	peak
2	5080.000	49.38	-5.83	43.55	54.00	-10.45	AVG
3	7360.000	55.27	1.12	56.39	74.00	-17.61	peak
4	7360.000	44.40	1.12	45.52	54.00	-8.48	AVG
5	10192.000	50.93	3.98	54.91	74.00	-19.09	peak
6	10192.000	39.59	3.98	43.57	54.00	-10.43	AVG
7	24400.000	26.13	28.46	54.59	74.00	-19.41	peak
8	24400.000	15.21	28.46	43.67	54.00	-10.33	AVG

Vertical

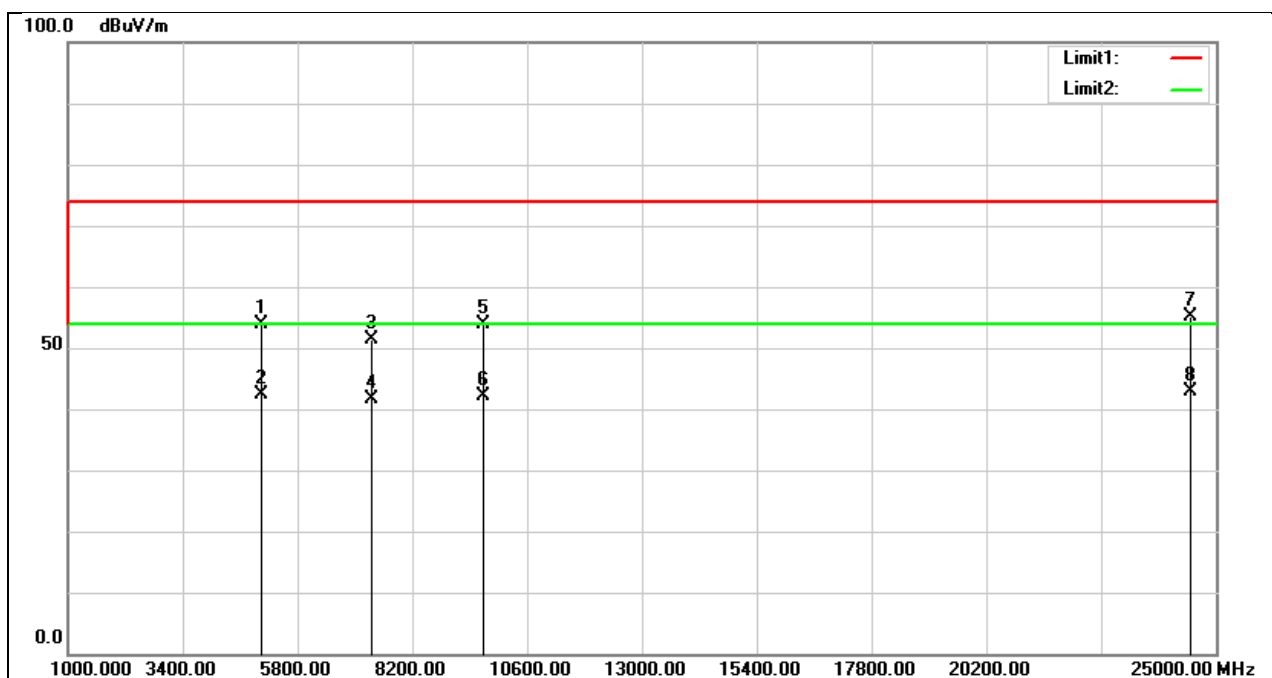


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5056.000	59.93	-5.94	53.99	74.00	-20.01	peak
2	5056.000	48.31	-5.94	42.37	54.00	-11.63	AVG
3	7360.000	50.16	1.12	51.28	74.00	-22.72	peak
4	7360.000	40.53	1.12	41.65	54.00	-12.35	AVG
5	9688.000	50.69	3.22	53.91	74.00	-20.09	peak
6	9688.000	38.80	3.22	42.02	54.00	-11.98	AVG
7	24472.000	38.50	16.53	55.03	74.00	-18.97	peak
8	24472.000	26.41	16.53	42.94	54.00	-11.06	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 06(2437MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11n,HT40	Humidity	: 56%


Horizontal

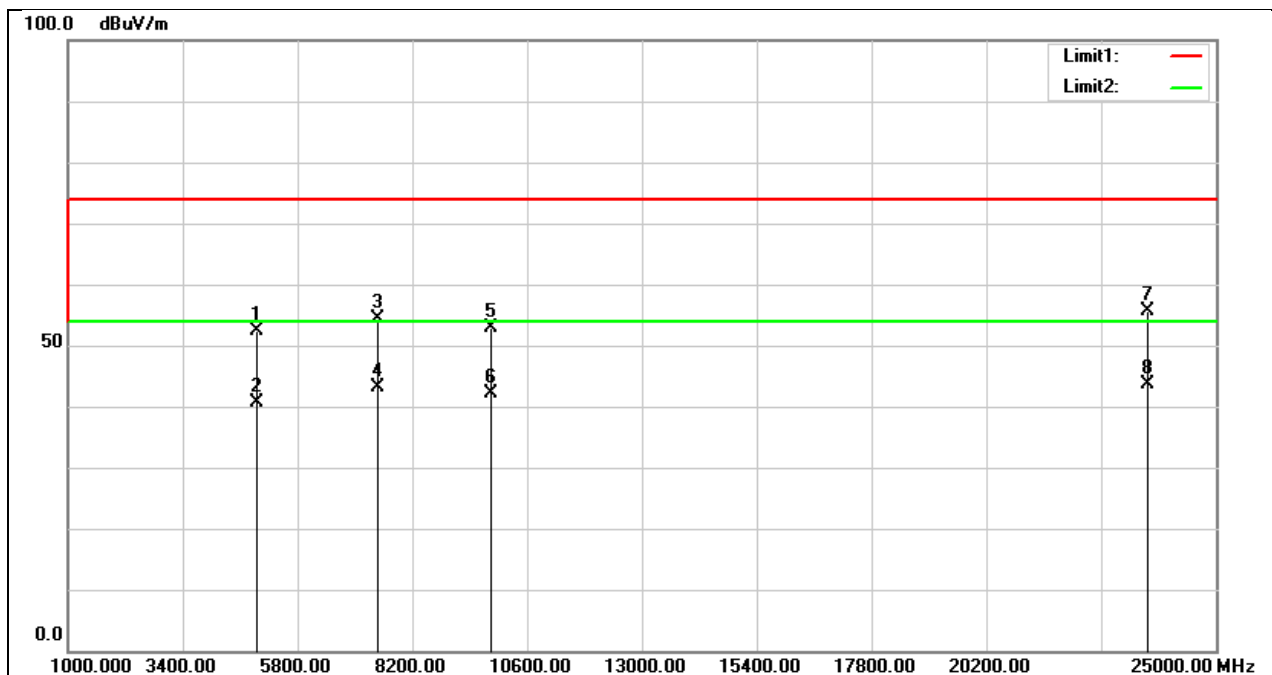

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4964.000	58.91	-6.42	52.49	74.00	-21.51	peak
2	4964.000	47.00	-6.42	40.58	54.00	-13.42	AVG
3	7480.000	52.88	1.56	54.44	74.00	-19.56	peak
4	7480.000	41.52	1.56	43.08	54.00	-10.92	AVG
5	9856.000	49.48	3.30	52.78	74.00	-21.22	peak
6	9856.000	38.85	3.30	42.15	54.00	-11.85	AVG
7	23584.000	27.89	27.62	55.51	74.00	-18.49	peak
8	23584.000	16.12	27.62	43.74	54.00	-10.26	AVG

Vertical

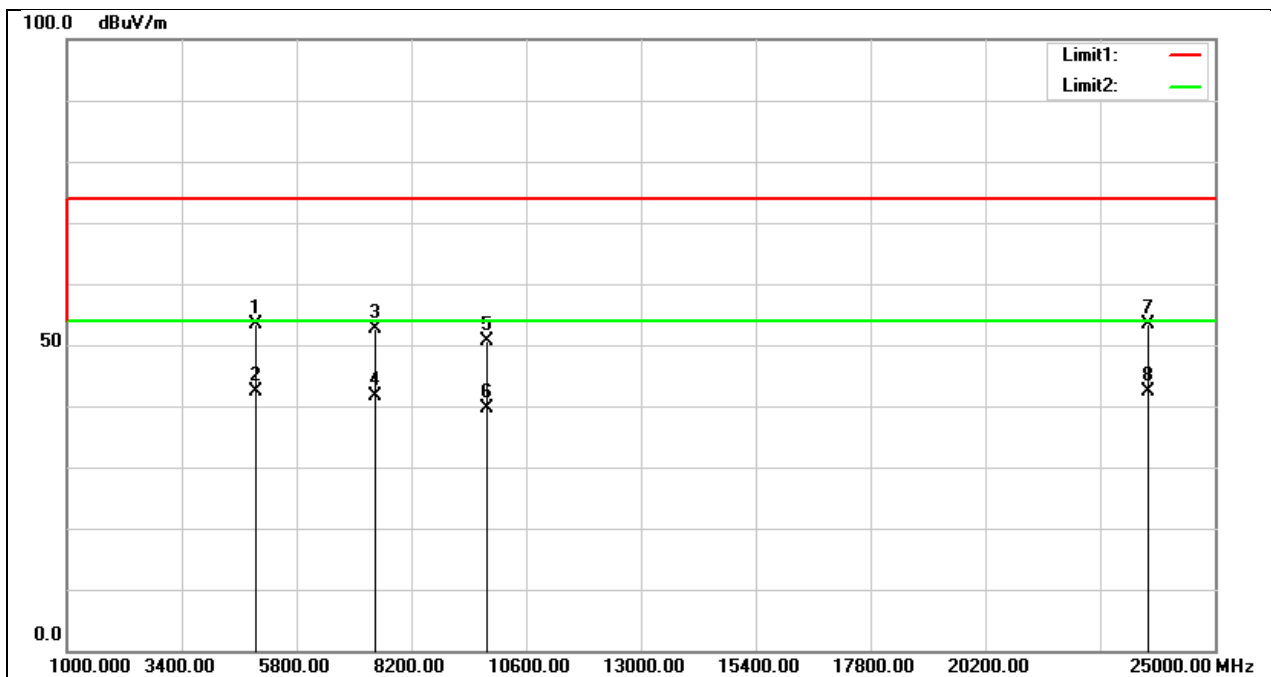


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	59.73	-6.45	53.28	74.00	-20.72	peak
2	4960.000	48.77	-6.45	42.32	54.00	-11.68	AVG
3	7456.000	51.27	1.46	52.73	74.00	-21.27	peak
4	7456.000	40.08	1.46	41.54	54.00	-12.46	AVG
5	9784.000	47.48	3.27	50.75	74.00	-23.25	peak
6	9784.000	36.27	3.27	39.54	54.00	-14.46	AVG
7	23608.000	37.77	15.65	53.42	74.00	-20.58	peak
8	23608.000	26.71	15.65	42.36	54.00	-11.64	AVG

Power	: AC 110V/60Hz	Pol/Phase	: Horizontal / Vertical
Test Mode	: CH 11(2452MHz)	Temperature	: 22.8℃
Modulation Type	: 802.11n,HT40	Humidity	: 56%


Horizontal

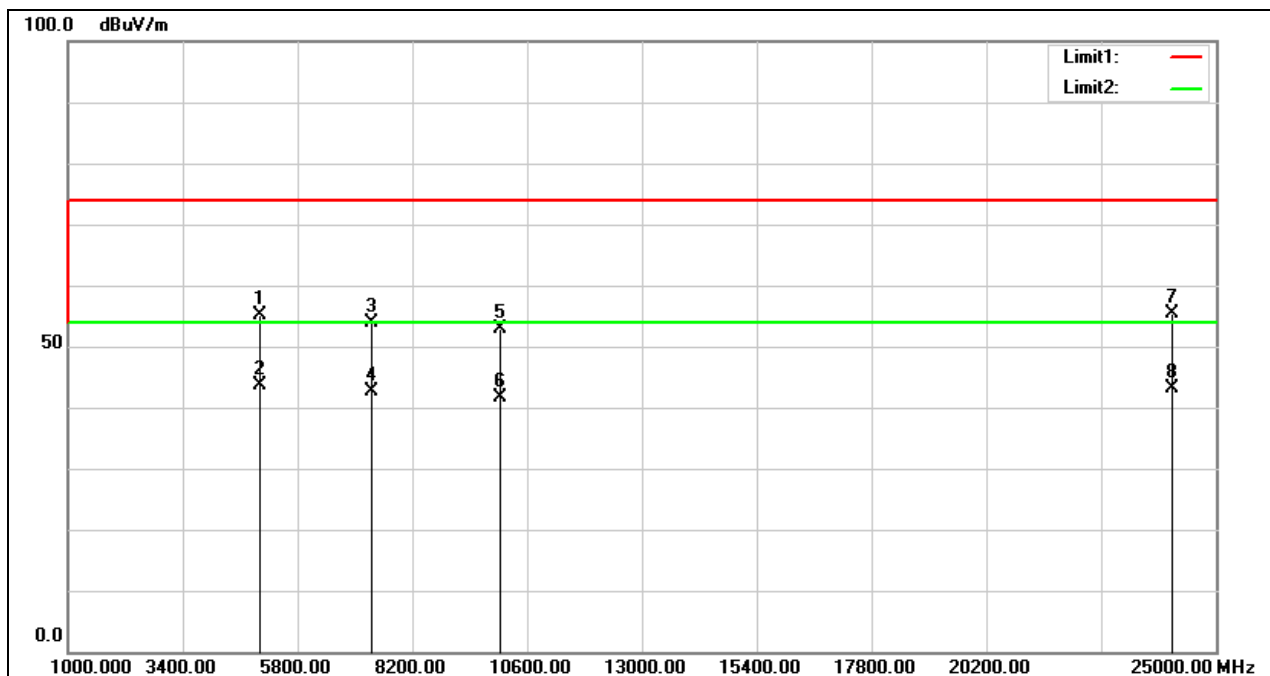

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5008.000	61.33	-6.15	55.18	74.00	-18.82	peak
2	5008.000	49.89	-6.15	43.74	54.00	-10.26	AVG
3	7360.000	52.77	1.12	53.89	74.00	-20.11	peak
4	7360.000	41.39	1.12	42.51	54.00	-11.49	AVG
5	10048.000	49.35	3.52	52.87	74.00	-21.13	peak
6	10048.000	38.13	3.52	41.65	54.00	-12.35	AVG
7	24088.000	27.26	28.20	55.46	74.00	-18.54	peak
8	24088.000	15.02	28.20	43.22	54.00	-10.78	AVG

Vertical

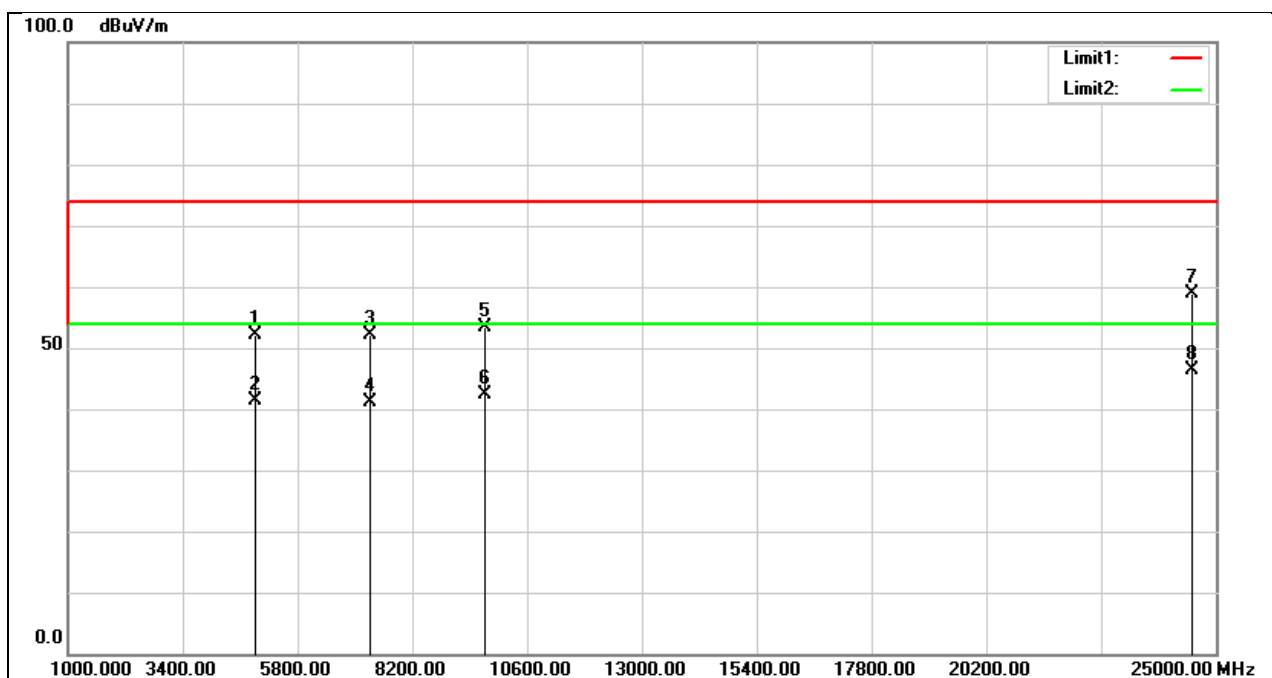

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4912.000	58.98	-6.77	52.21	74.00	-21.79	peak
2	4912.000	48.13	-6.77	41.36	54.00	-12.64	AVG
3	7312.000	51.23	0.94	52.17	74.00	-21.83	peak
4	7312.000	40.10	0.94	41.04	54.00	-12.96	AVG
5	9712.000	50.07	3.23	53.30	74.00	-20.70	peak
6	9712.000	39.11	3.23	42.34	54.00	-11.66	AVG
7	24496.000	42.22	16.55	58.77	74.00	-15.23	peak
8	24496.000	29.87	16.55	46.42	54.00	-7.58	AVG

Note: 1.30 MHz ~ 25 GHz: (Scan with 11b, 11g, 11n HT20 and 11n HT40, the worst case is 11b mode)


2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Band Edge data


Remark: All restriction band have been tested, and only the worst case is shown in report

802.11 b low CH

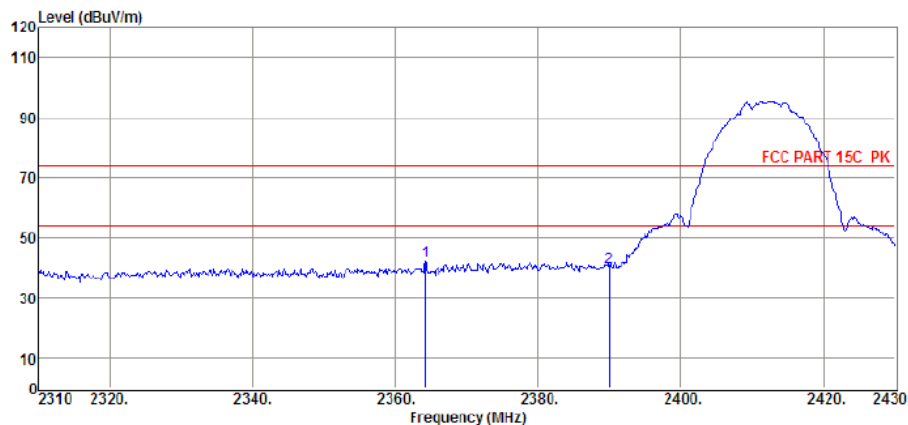

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2364.24	39.37	26.91	29.35	5.08	42.01	74.00	-31.99	Peak	HORIZONTAL
2	2390.00	37.33	27.00	29.42	5.11	40.02	74.00	-33.98	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

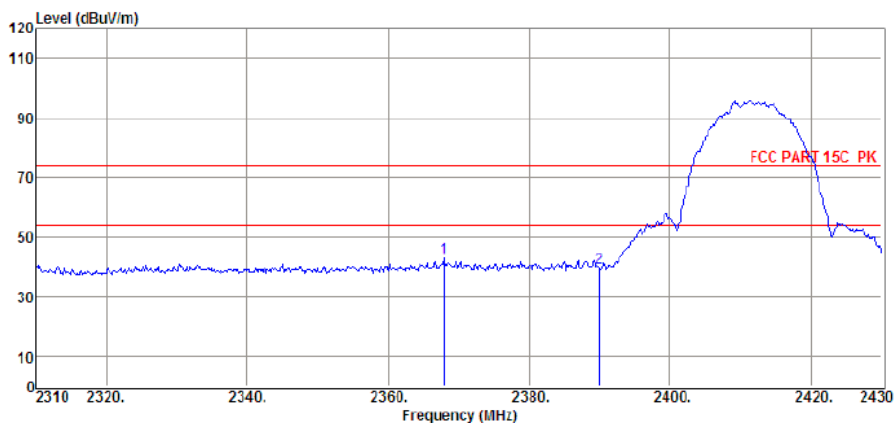

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2367.96	40.34	26.92	29.37	5.08	42.97	74.00	-31.03	Peak	VERTICAL
2	2390.00	37.10	27.00	29.42	5.11	39.79	74.00	-34.21	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

802.11 b High CH

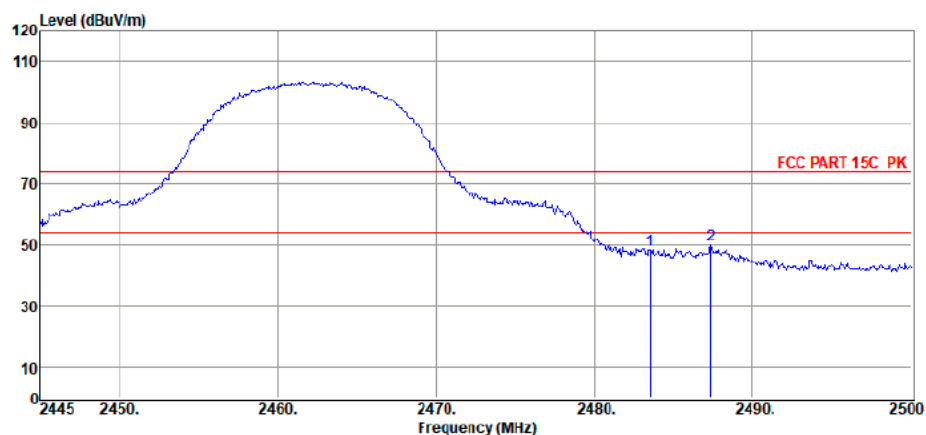


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	57.43	29.66	43.25	4.36	48.20	74.00	-25.80	Peak	HORIZONTAL
2	2487.35	58.94	29.67	43.25	4.37	49.73	74.00	-24.27	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

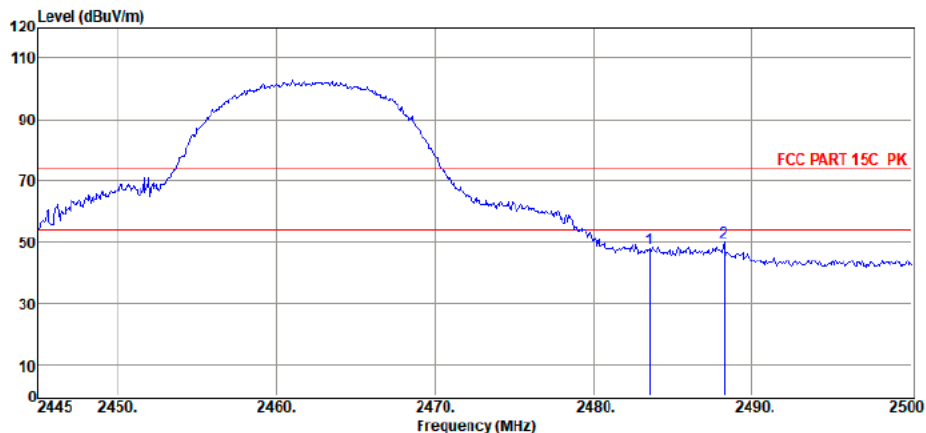


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	56.96	29.66	43.25	4.36	47.73	74.00	-26.27	Peak	VERTICAL
2	2488.18	58.97	29.67	43.25	4.37	49.76	74.00	-24.24	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

802.11 g Low CH

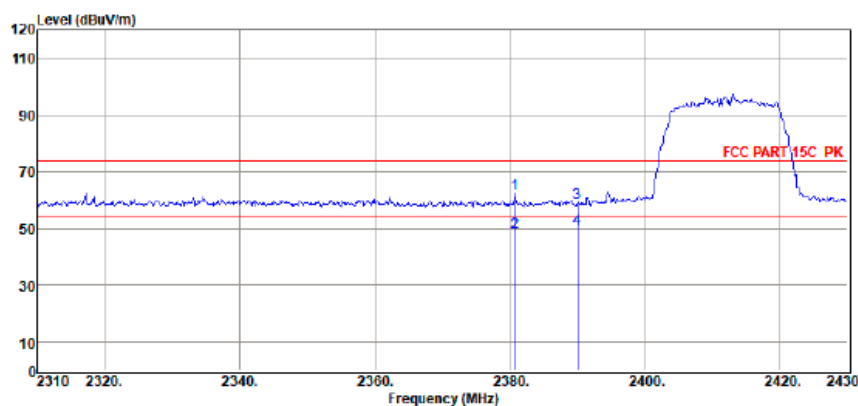

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2380.80	28.52	29.44	0.00	4.19	62.15	74.00	-11.85	Peak	VERTICAL
2	2380.80	14.89	29.44	0.00	4.19	48.52	54.00	-5.48	Average	VERTICAL
3	2390.00	25.13	29.46	0.00	4.21	58.80	74.00	-15.20	Peak	VERTICAL
4	2390.00	16.23	29.46	0.00	4.21	49.90	54.00	-4.10	Average	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

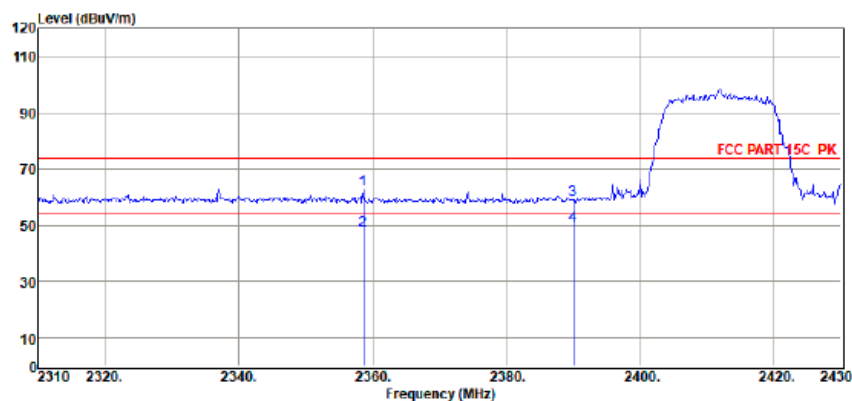

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2358.60	29.26	29.39	0.00	4.16	62.81	74.00	-11.19	Peak	HORIZONTAL
2	2358.60	14.68	29.39	0.00	4.16	48.23	54.00	-5.77	Average	HORIZONTAL
3	2390.00	25.10	29.46	0.00	4.21	58.77	74.00	-15.23	Peak	HORIZONTAL
4	2390.00	16.30	29.46	0.00	4.21	49.97	54.00	-4.03	Average	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

802.11 g High CH

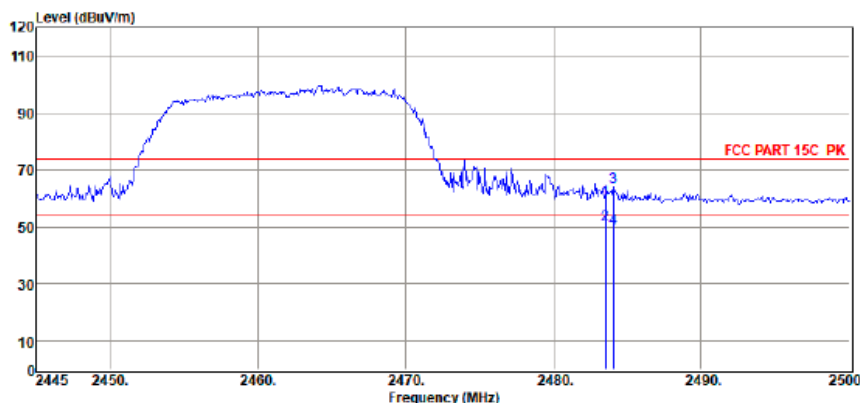

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	25.33	29.66	0.00	4.36	59.35	74.00	-14.65	Peak	HORIZONTAL
2	2483.50	16.71	29.66	0.00	4.36	50.73	54.00	-3.27	Average	HORIZONTAL
3	2484.05	29.75	29.67	0.00	4.36	63.78	74.00	-10.22	Peak	HORIZONTAL
4	2484.05	15.60	29.67	0.00	4.36	49.63	54.00	-4.37	Average	HORIZONTAL


- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

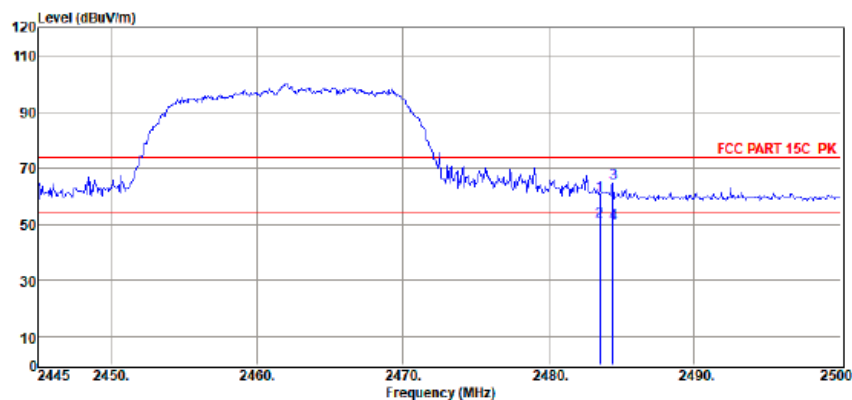

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	26.17	29.66	0.00	4.36	60.19	74.00	-13.81	Peak	VERTICAL
2	2483.50	17.11	29.66	0.00	4.36	51.13	54.00	-2.87	Average	VERTICAL
3	2484.44	30.75	29.67	0.00	4.36	64.78	74.00	-9.22	Peak	VERTICAL
4	2484.44	16.40	29.67	0.00	4.36	50.43	54.00	-3.57	Average	VERTICAL


- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

802.11 N 20 Low CH

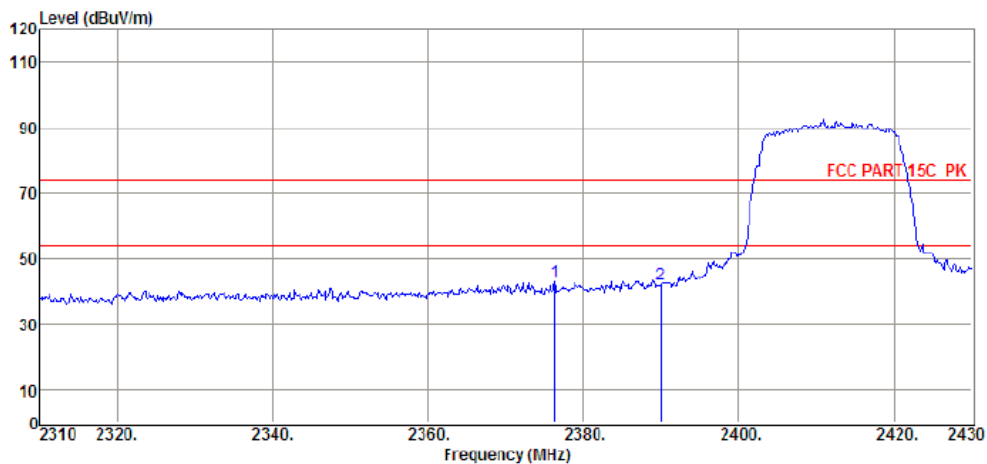

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2376.36	40.41	26.95	29.39	5.09	43.06	74.00	-30.94	Peak	HORIZONTAL
2	2390.00	39.36	27.00	29.42	5.11	42.05	74.00	-31.95	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

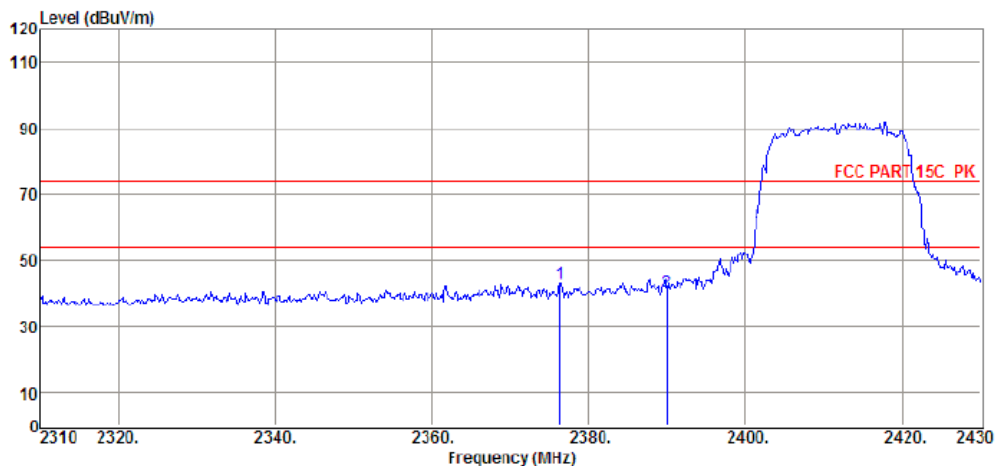

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2376.36	40.30	26.95	29.39	5.09	42.95	74.00	-31.05	Peak	VERTICAL
2	2390.00	37.61	27.00	29.42	5.11	40.30	74.00	-33.70	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

802.11 N 20 High CH

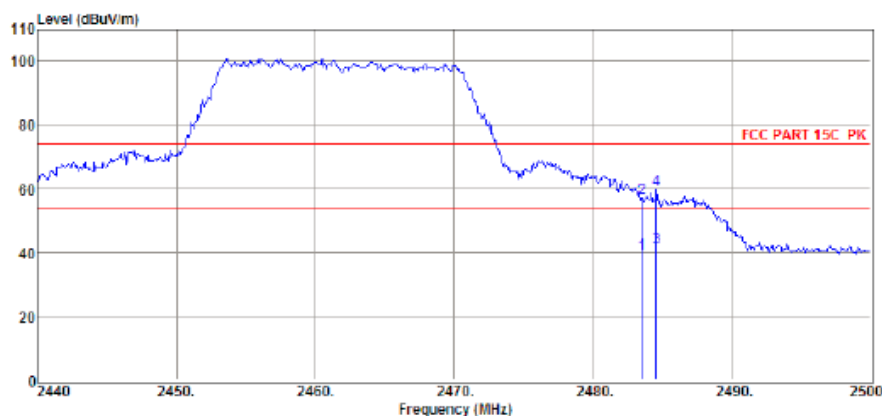

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	33.31	30.14	29.71	6.13	39.87	54.00	-14.13	Average	HORIZONTAL
2	2483.50	50.54	30.14	29.71	6.13	57.10	74.00	-16.90	Peak	HORIZONTAL
3	2484.58	35.14	30.14	29.71	6.13	41.70	54.00	-12.30	Average	HORIZONTAL
4	2484.58	53.16	30.14	29.71	6.13	59.72	74.00	-14.28	Peak	HORIZONTAL


- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

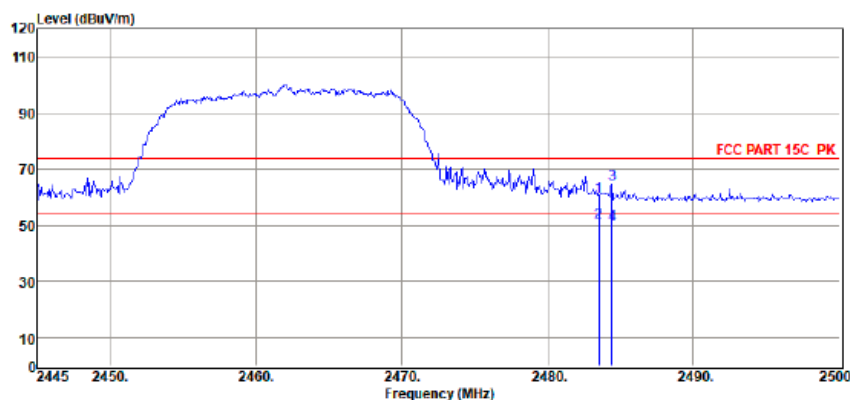

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	26.17	29.66	0.00	4.36	60.19	74.00	-13.81	Peak	VERTICAL
2	2483.50	17.11	29.66	0.00	4.36	51.13	54.00	-2.87	Average	VERTICAL
3	2484.44	30.75	29.67	0.00	4.36	64.78	74.00	-9.22	Peak	VERTICAL
4	2484.44	16.40	29.67	0.00	4.36	50.43	54.00	-3.57	Average	VERTICAL


- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

802.11 N 40 Low CH

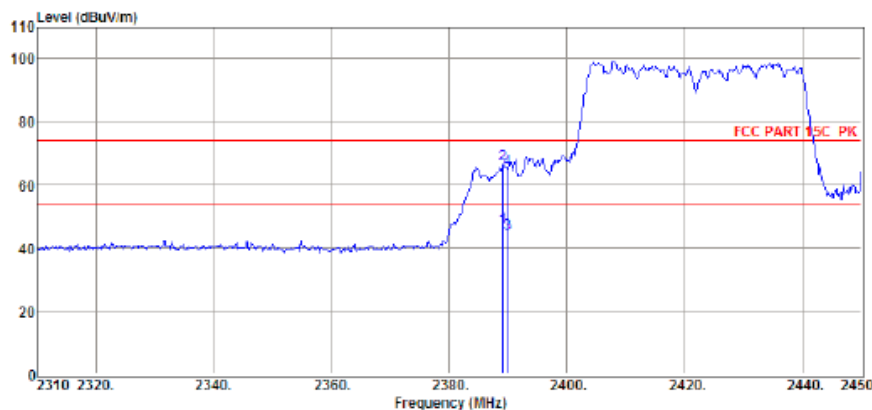

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.10	40.25	29.77	29.42	6.01	46.61	54.00	-7.39	Average	VERTICAL
2	2389.10	60.30	29.77	29.42	6.01	66.66	74.00	-7.34	Peak	VERTICAL
3	2390.00	38.11	29.78	29.42	6.03	44.50	54.00	-9.50	Average	VERTICAL
4	2390.00	58.62	29.78	29.42	6.03	65.01	74.00	-8.99	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

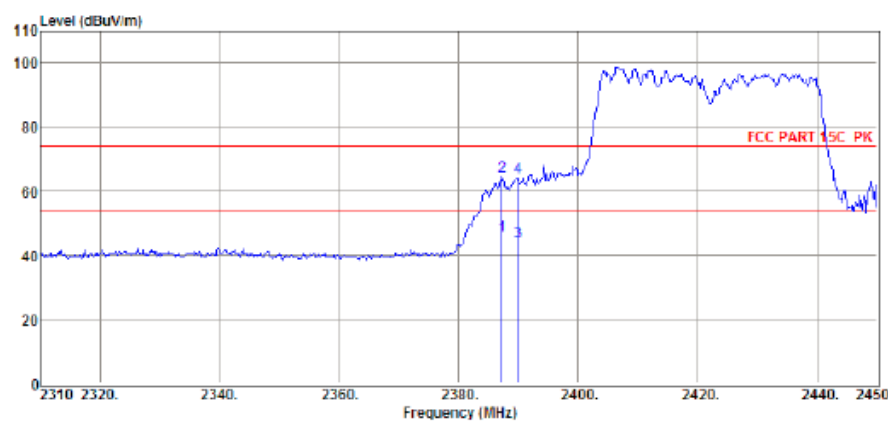

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.28	39.68	29.77	29.41	6.01	46.05	54.00	-7.95	Average	HORIZONTAL
2	2387.28	58.15	29.77	29.41	6.01	64.52	74.00	-9.48	Peak	HORIZONTAL
3	2390.00	37.79	29.78	29.42	6.03	44.18	54.00	-9.82	Average	HORIZONTAL
4	2390.00	58.04	29.78	29.42	6.03	64.43	74.00	-9.57	Peak	HORIZONTAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

802.11 N 40 High CH

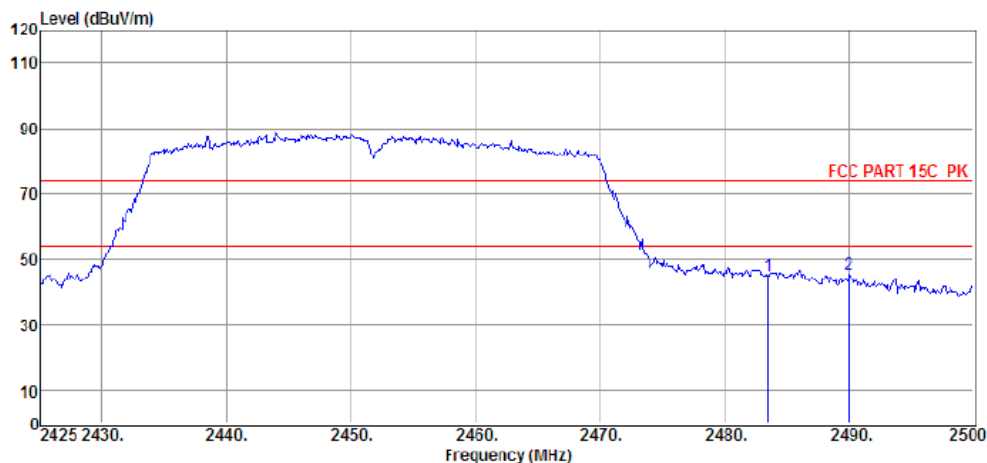

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	42.04	27.34	29.71	5.21	44.88	74.00	-29.12	Peak	HORIZONTAL
2	2490.03	42.30	27.36	29.71	5.22	45.17	74.00	-28.83	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

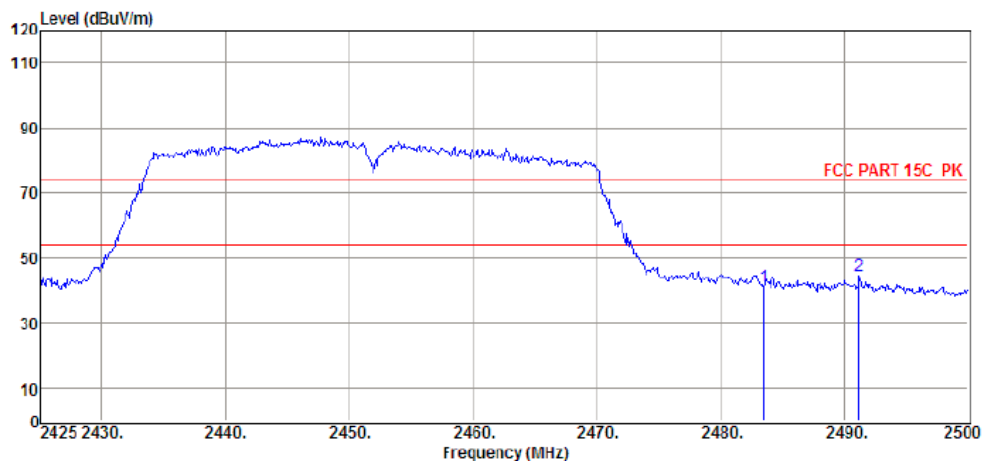

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	38.26	27.34	29.71	5.21	41.10	74.00	-32.90	Peak	VERTICAL
2	2491.23	41.66	27.37	29.73	5.22	44.52	74.00	-29.48	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



8 CONDUCTED EMISSION TEST

8.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

8.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

8.1.3 TEST SETUP

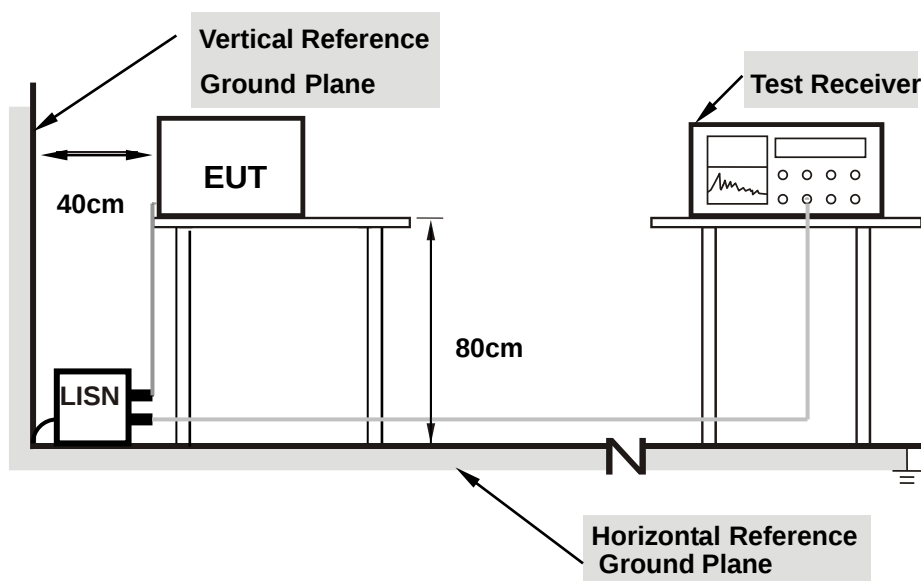


Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

8.1.4 TEST RESULT

Temperature:	22.1 °C	Relative Humidity:	56%
Test Voltage:	120V/60HZ	Phase:	L/N
Test Mode:	802.11b(worst)		

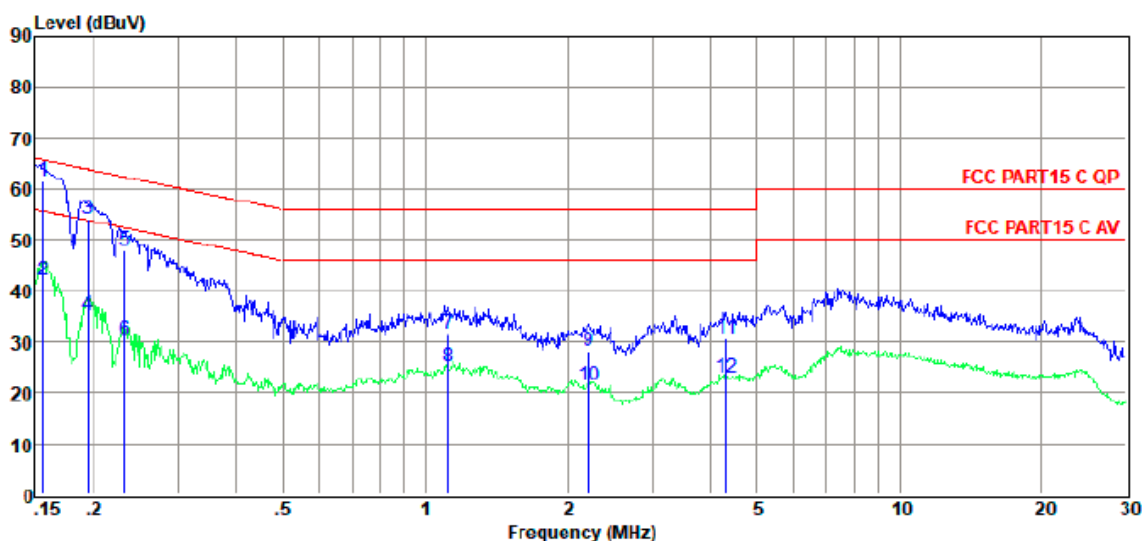


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.16	42.05	9.52	0.04	9.86	61.47	65.69	-4.22	QP	LINE
2	0.16	22.58	9.52	0.04	9.86	42.00	55.69	-13.69	Average	LINE
3	0.19	34.68	9.51	0.04	9.86	54.09	63.89	-9.80	QP	LINE
4	0.19	15.76	9.51	0.04	9.86	35.17	53.89	-18.72	Average	LINE
5	0.23	28.43	9.52	0.04	9.86	47.85	62.39	-14.54	QP	LINE
6	0.23	10.81	9.52	0.04	9.86	30.23	52.39	-22.16	Average	LINE
7	1.12	12.13	9.57	0.14	9.86	31.70	56.00	-24.30	QP	LINE
8	1.12	5.46	9.57	0.14	9.86	25.03	46.00	-20.97	Average	LINE
9	2.21	8.45	9.60	0.12	9.87	28.04	56.00	-27.96	QP	LINE
10	2.21	1.68	9.60	0.12	9.87	21.27	46.00	-24.73	Average	LINE
11	4.32	11.15	9.64	0.10	9.87	30.76	56.00	-25.24	QP	LINE
12	4.32	3.20	9.64	0.10	9.87	22.81	46.00	-23.19	Average	LINE

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

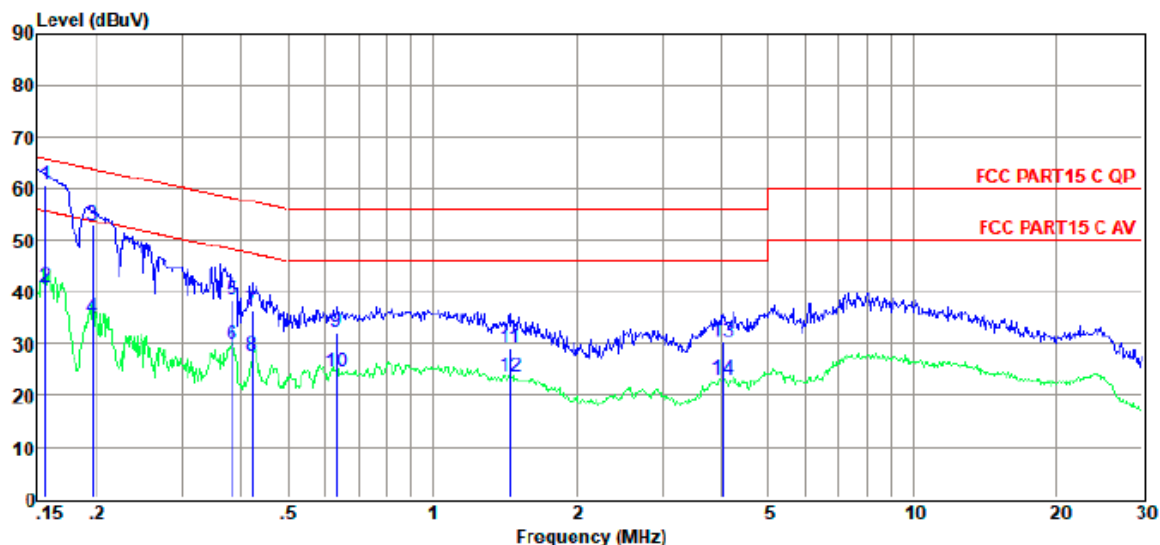

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	41.34	9.48	0.04	9.86	60.72	65.69	-4.97	QP	NEUTRAL
2	0.16	21.33	9.48	0.04	9.86	40.71	55.69	-14.98	Average	NEUTRAL
3	0.20	33.60	9.45	0.04	9.86	52.95	63.80	-10.85	QP	NEUTRAL
4	0.20	15.69	9.45	0.04	9.86	35.04	53.80	-18.76	Average	NEUTRAL
5	0.38	19.00	9.37	0.04	9.83	38.24	58.21	-19.97	QP	NEUTRAL
6	0.38	10.50	9.37	0.04	9.83	29.74	48.21	-18.47	Average	NEUTRAL
7	0.42	17.19	9.37	0.04	9.82	36.42	57.44	-21.02	QP	NEUTRAL
8	0.42	8.21	9.37	0.04	9.82	27.44	47.44	-20.00	Average	NEUTRAL
9	0.63	12.80	9.33	0.07	9.84	32.04	56.00	-23.96	QP	NEUTRAL
10	0.63	5.34	9.33	0.07	9.84	24.58	46.00	-21.42	Average	NEUTRAL
11	1.45	9.90	9.28	0.13	9.86	29.17	56.00	-26.83	QP	NEUTRAL
12	1.45	4.30	9.28	0.13	9.86	23.57	46.00	-22.43	Average	NEUTRAL

Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).

4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 RESULT

The antennas used for this product are integration antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.44dBi.

*****END OF THE REPORT*****