

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.34                 | 0.0272              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.85                 | 0.1531              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.16                 | 0.0261              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.76                 | 0.1500              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.27                 | 0.0267              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.84                 | 0.1528              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.34                 | 0.0272              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.87                 | 0.1538              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Total | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 20.30                 | 0.1072              | 23.98            | 0.2500         | Pass   |
| 5775                 | 27.85                 | 0.6095              | 30.00            | 1.0000         | Pass   |

### Beamforming

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.86                 | 0.0968              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.35                 | 0.1365              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.53                 | 0.1422              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.70                 | 0.1479              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.65                 | 0.1462              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.58                 | 0.1439              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.71                 | 0.0935              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.29                 | 0.1346              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.51                 | 0.1416              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.73                 | 0.1489              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.63                 | 0.1455              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.58                 | 0.1439              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.74                 | 0.0942              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.55                 | 0.1429              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.63                 | 0.1455              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.81                 | 0.1517              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.72                 | 0.1486              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.71                 | 0.1483              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.93                 | 0.0984              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.87                 | 0.1538              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.81                 | 0.1517              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.76                 | 0.1500              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.92                 | 0.1556              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.64                 | 0.1459              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT20)_Total | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 25.83                 | 0.3828              | 23.98            | 0.2500         | Pass   |
| 5200                 | 27.54                 | 0.5675              | 23.98            | 0.2500         | Pass   |
| 5240                 | 27.64                 | 0.5808              | 23.98            | 0.2500         | Pass   |
| 5745                 | 27.77                 | 0.5984              | 30.00            | 1.0000         | Pass   |
| 5785                 | 27.75                 | 0.5957              | 30.00            | 1.0000         | Pass   |
| 5825                 | 27.65                 | 0.5821              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 15.10                 | 0.0324              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.85                 | 0.1531              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.84                 | 0.1528              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.88                 | 0.1542              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 14.90                 | 0.0309              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.44                 | 0.1393              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.82                 | 0.1521              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.73                 | 0.1489              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 14.88                 | 0.0308              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.59                 | 0.1442              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.82                 | 0.1521              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.73                 | 0.1489              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 15.05                 | 0.0320              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.63                 | 0.1455              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.79                 | 0.1510              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.72                 | 0.1486              | 30.00            | 1.0000         | Pass   |

|           |                           |             |           |
|-----------|---------------------------|-------------|-----------|
| Test Mode | IEEE 802.11n (HT40)_Total | Tested Date | 2023/9/11 |
|-----------|---------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 21.00                 | 0.1259              | 23.98            | 0.2500         | Pass   |
| 5230                 | 27.65                 | 0.5821              | 23.98            | 0.2500         | Pass   |
| 5755                 | 27.84                 | 0.6081              | 30.00            | 1.0000         | Pass   |
| 5795                 | 27.79                 | 0.6012              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.98                 | 0.0995              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.74                 | 0.1493              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.65                 | 0.1462              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.76                 | 0.1500              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.71                 | 0.1483              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.42                 | 0.1387              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.83                 | 0.0962              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.52                 | 0.1419              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.62                 | 0.1452              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.64                 | 0.1459              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.82                 | 0.1521              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.59                 | 0.1442              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.86                 | 0.0968              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.59                 | 0.1442              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.73                 | 0.1489              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.82                 | 0.1521              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.90                 | 0.1549              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.29                 | 0.1346              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 20.05                 | 0.1012              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.79                 | 0.1510              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.71                 | 0.1483              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.83                 | 0.1524              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.95                 | 0.1567              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.28                 | 0.1343              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT20)_Total | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 25.95                 | 0.3936              | 23.98            | 0.2500         | Pass   |
| 5200                 | 27.68                 | 0.5861              | 23.98            | 0.2500         | Pass   |
| 5240                 | 27.70                 | 0.5888              | 23.98            | 0.2500         | Pass   |
| 5745                 | 27.78                 | 0.5998              | 30.00            | 1.0000         | Pass   |
| 5785                 | 27.87                 | 0.6124              | 30.00            | 1.0000         | Pass   |
| 5825                 | 27.42                 | 0.5521              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 15.23                 | 0.0333              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.59                 | 0.1442              | 23.98            | 0.2500         | Pass   |
| 5755                 | 22.02                 | 0.1592              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.85                 | 0.1531              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 15.03                 | 0.0318              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.38                 | 0.1374              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.59                 | 0.1442              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.59                 | 0.1442              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 15.01                 | 0.0317              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.44                 | 0.1393              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.78                 | 0.1507              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.72                 | 0.1486              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 15.18                 | 0.0330              | 23.98            | 0.2500         | Pass   |
| 5230                 | 21.68                 | 0.1472              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.80                 | 0.1514              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.25                 | 0.1334              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT40)_Total | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 21.13                 | 0.1297              | 23.98            | 0.2500         | Pass   |
| 5230                 | 27.54                 | 0.5675              | 23.98            | 0.2500         | Pass   |
| 5755                 | 27.82                 | 0.6053              | 30.00            | 1.0000         | Pass   |
| 5795                 | 27.63                 | 0.5794              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 15.89                 | 0.0388              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.73                 | 0.1489              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 15.41                 | 0.0348              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.58                 | 0.1439              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 15.75                 | 0.0376              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.83                 | 0.1524              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 15.70                 | 0.0372              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.69                 | 0.1476              | 30.00            | 1.0000         | Pass   |

|           |                             |             |           |
|-----------|-----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ac (VHT80)_Total | Tested Date | 2023/9/11 |
|-----------|-----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 21.71                 | 0.1483              | 23.98            | 0.2500         | Pass   |
| 5775                 | 27.73                 | 0.5929              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 20.16                 | 0.1038              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.69                 | 0.1476              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.65                 | 0.1462              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.67                 | 0.1469              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.66                 | 0.1466              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.72                 | 0.1486              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 19.97                 | 0.0993              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.45                 | 0.1396              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.42                 | 0.1387              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.75                 | 0.1496              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.80                 | 0.1514              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.72                 | 0.1486              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 20.09                 | 0.1021              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.61                 | 0.1449              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.70                 | 0.1479              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.75                 | 0.1496              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.74                 | 0.1493              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.71                 | 0.1483              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 20.24                 | 0.1057              | 23.98            | 0.2500         | Pass   |
| 5200                 | 21.73                 | 0.1489              | 23.98            | 0.2500         | Pass   |
| 5240                 | 21.85                 | 0.1531              | 23.98            | 0.2500         | Pass   |
| 5745                 | 21.86                 | 0.1535              | 30.00            | 1.0000         | Pass   |
| 5785                 | 21.83                 | 0.1524              | 30.00            | 1.0000         | Pass   |
| 5825                 | 21.93                 | 0.1560              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE20)_Total | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5180                 | 26.14                 | 0.4111              | 23.98            | 0.2500         | Pass   |
| 5200                 | 27.64                 | 0.5808              | 23.98            | 0.2500         | Pass   |
| 5240                 | 27.68                 | 0.5861              | 23.98            | 0.2500         | Pass   |
| 5745                 | 27.78                 | 0.5998              | 30.00            | 1.0000         | Pass   |
| 5785                 | 27.78                 | 0.5998              | 30.00            | 1.0000         | Pass   |
| 5825                 | 27.79                 | 0.6012              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 14.13                 | 0.0259              | 23.98            | 0.2500         | Pass   |
| 5230                 | 20.03                 | 0.1007              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.83                 | 0.1524              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.69                 | 0.1476              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 14.12                 | 0.0258              | 23.98            | 0.2500         | Pass   |
| 5230                 | 19.91                 | 0.0979              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.86                 | 0.1535              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.72                 | 0.1486              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 14.04                 | 0.0254              | 23.98            | 0.2500         | Pass   |
| 5230                 | 20.08                 | 0.1019              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.72                 | 0.1486              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.74                 | 0.1493              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 14.28                 | 0.0268              | 23.98            | 0.2500         | Pass   |
| 5230                 | 20.37                 | 0.1089              | 23.98            | 0.2500         | Pass   |
| 5755                 | 21.85                 | 0.1531              | 30.00            | 1.0000         | Pass   |
| 5795                 | 21.62                 | 0.1452              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE40)_Total | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5190                 | 20.16                 | 0.1038              | 23.98            | 0.2500         | Pass   |
| 5230                 | 26.12                 | 0.4093              | 23.98            | 0.2500         | Pass   |
| 5755                 | 27.84                 | 0.6081              | 30.00            | 1.0000         | Pass   |
| 5795                 | 27.71                 | 0.5902              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.1 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.28                 | 0.0268              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.76                 | 0.1500              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.2 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.01                 | 0.0252              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.71                 | 0.1483              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.3 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.09                 | 0.0256              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.78                 | 0.1507              | 30.00            | 1.0000         | Pass   |

|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.4 | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 14.33                 | 0.0271              | 23.98            | 0.2500         | Pass   |
| 5775                 | 21.75                 | 0.1496              | 30.00            | 1.0000         | Pass   |


|           |                            |             |           |
|-----------|----------------------------|-------------|-----------|
| Test Mode | IEEE 802.11ax (HE80)_Total | Tested Date | 2023/9/11 |
|-----------|----------------------------|-------------|-----------|

| Test Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Result |
|----------------------|-----------------------|---------------------|------------------|----------------|--------|
| 5210                 | 20.20                 | 0.1047              | 23.98            | 0.2500         | Pass   |
| 5775                 | 27.77                 | 0.5984              | 30.00            | 1.0000         | Pass   |

## APPENDIX F POWER SPECTRAL DENSITY


|           |                    |
|-----------|--------------------|
| Test Mode | IEEE 802.11a_Ant.1 |
|-----------|--------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 11.53                   | 0.00             | 11.53                              | 14.98                   | Pass   |
| 5200                 | 11.33                   | 0.00             | 11.33                              | 14.98                   | Pass   |
| 5240                 | 10.73                   | 0.00             | 10.73                              | 14.98                   | Pass   |

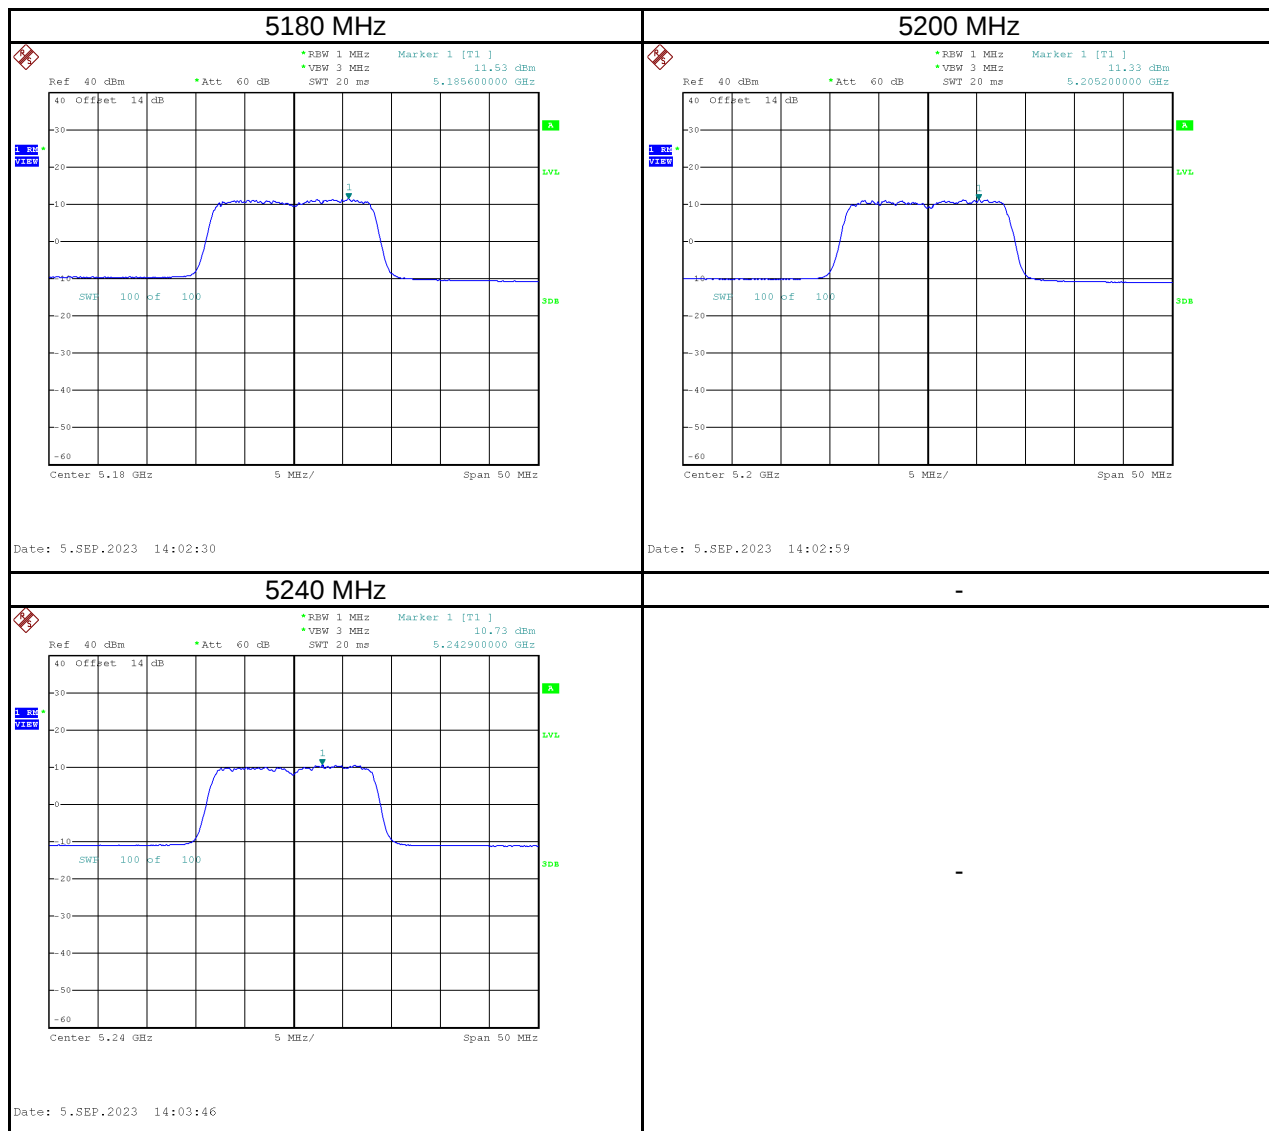


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | 8.76                        | 15.75                       | 0.00             | 15.75                                  | 27.98                       | Pass   |
| 5785                 | 9.25                        | 16.24                       | 0.00             | 16.24                                  | 27.98                       | Pass   |
| 5825                 | 8.60                        | 15.59                       | 0.00             | 15.59                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

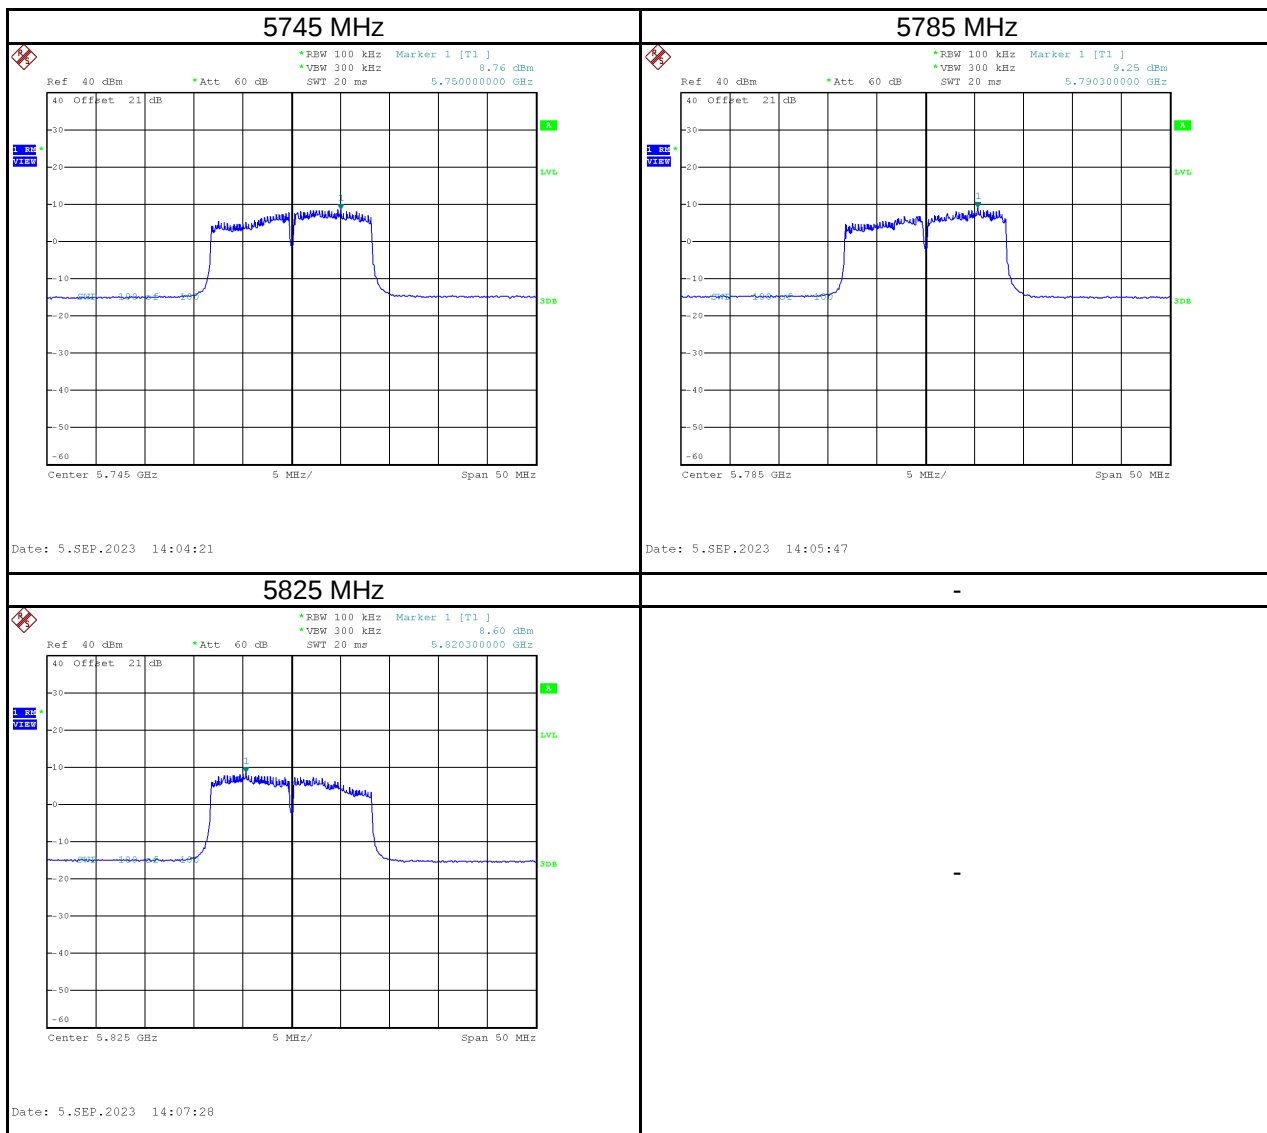


|           |                    |
|-----------|--------------------|
| Test Mode | IEEE 802.11a_Ant.2 |
|-----------|--------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | -1.11                   | 0.00             | -1.11                              | 14.98                   | Pass   |
| 5200                 | -0.95                   | 0.00             | -0.95                              | 14.98                   | Pass   |
| 5240                 | -1.89                   | 0.00             | -1.89                              | 14.98                   | Pass   |

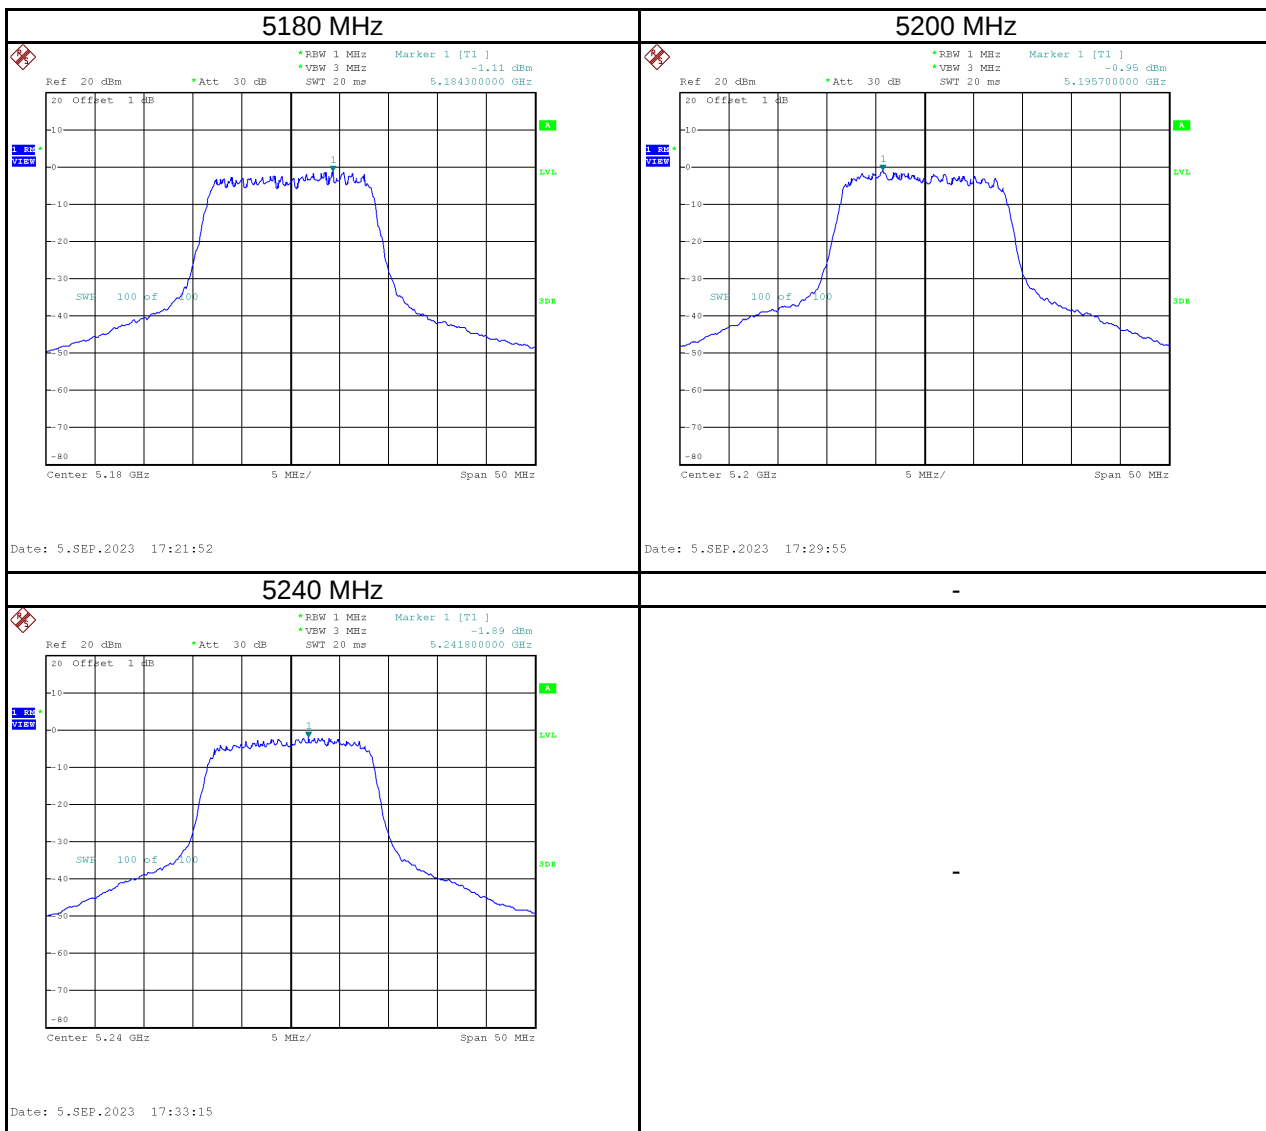


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | -2.67                       | 4.32                        | 0.00             | 4.32                                   | 27.98                       | Pass   |
| 5785                 | -3.45                       | 3.54                        | 0.00             | 3.54                                   | 27.98                       | Pass   |
| 5825                 | -3.97                       | 3.02                        | 0.00             | 3.02                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

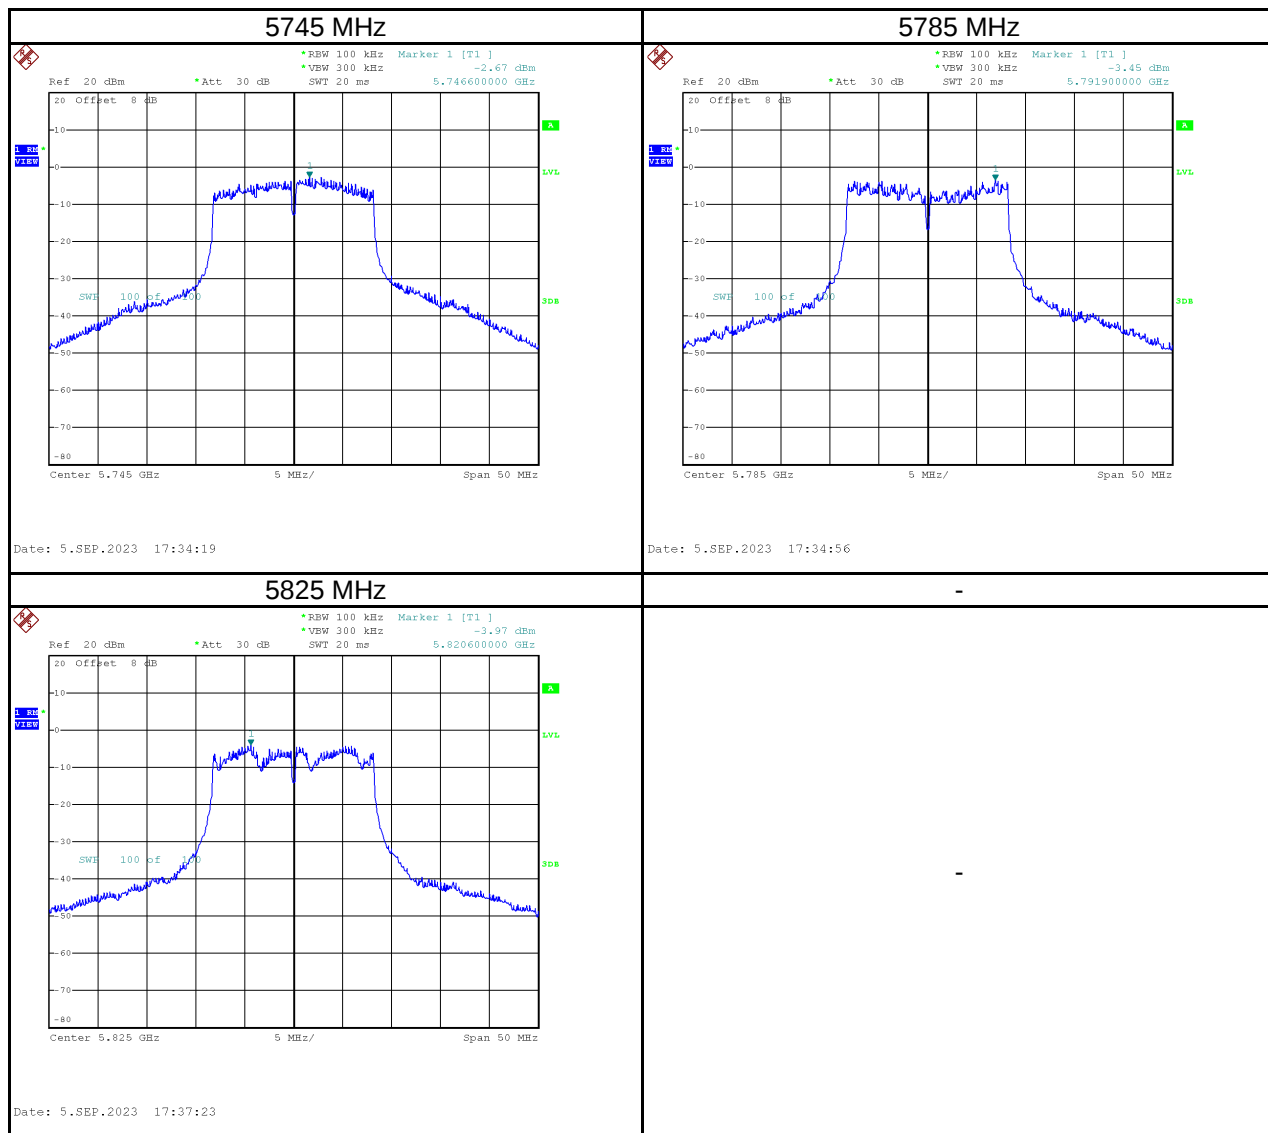


|           |                    |
|-----------|--------------------|
| Test Mode | IEEE 802.11a_Ant.3 |
|-----------|--------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | -4.25                   | 0.00             | -4.25                              | 14.98                   | Pass   |
| 5200                 | -4.38                   | 0.00             | -4.38                              | 14.98                   | Pass   |
| 5240                 | -3.83                   | 0.00             | -3.83                              | 14.98                   | Pass   |

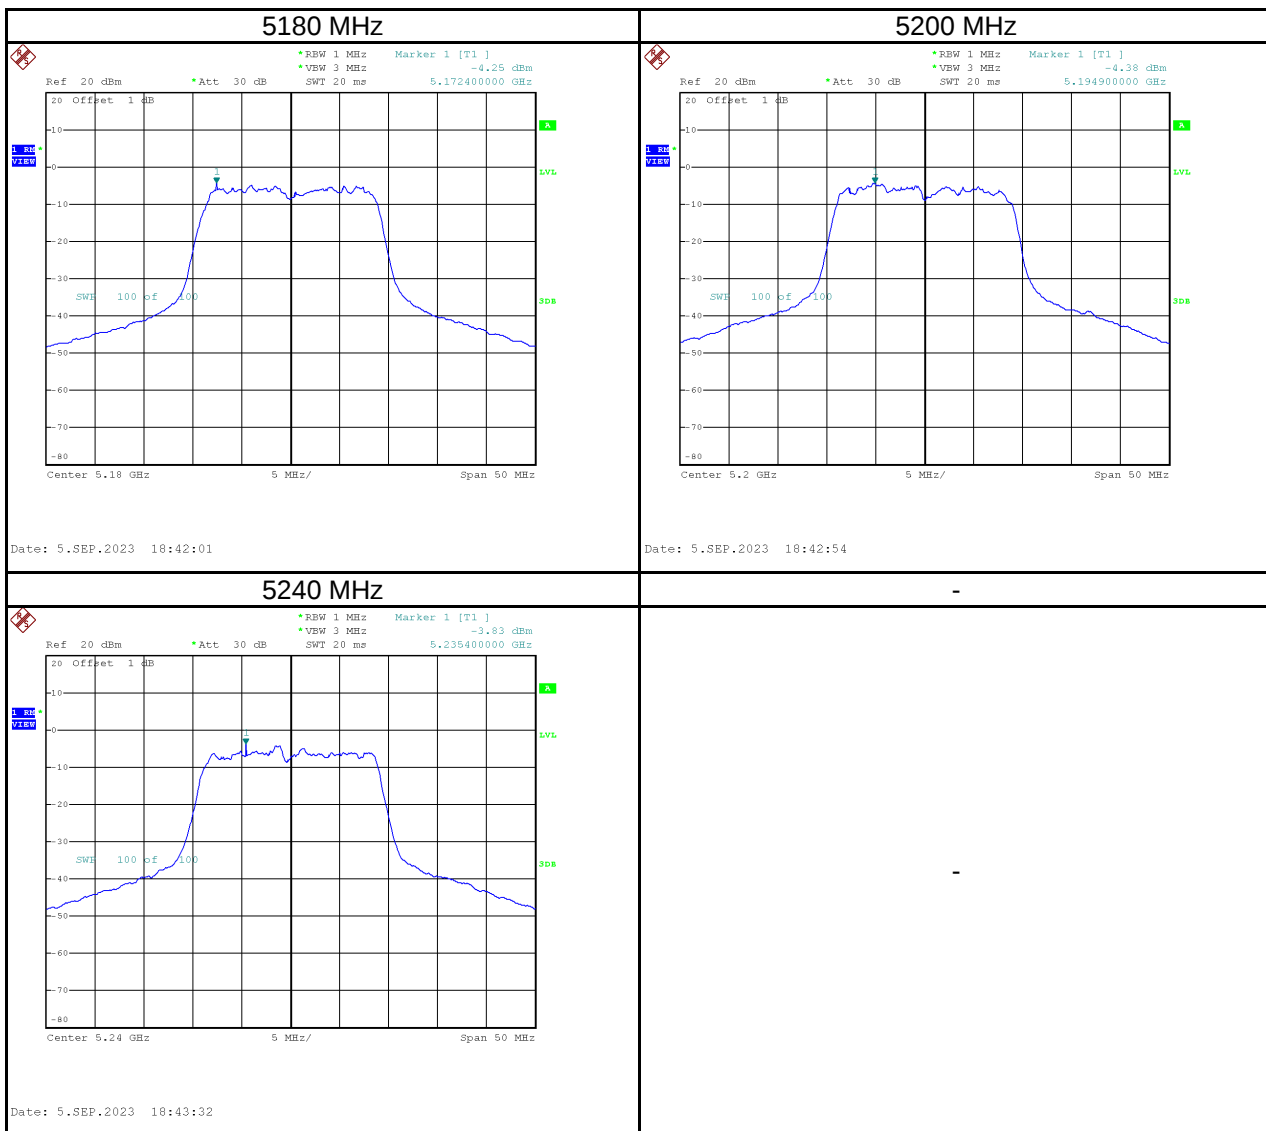


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | -6.38                       | 0.61                        | 0.00             | 0.61                                   | 27.98                       | Pass   |
| 5785                 | -6.22                       | 0.77                        | 0.00             | 0.77                                   | 27.98                       | Pass   |
| 5825                 | -6.68                       | 0.31                        | 0.00             | 0.31                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

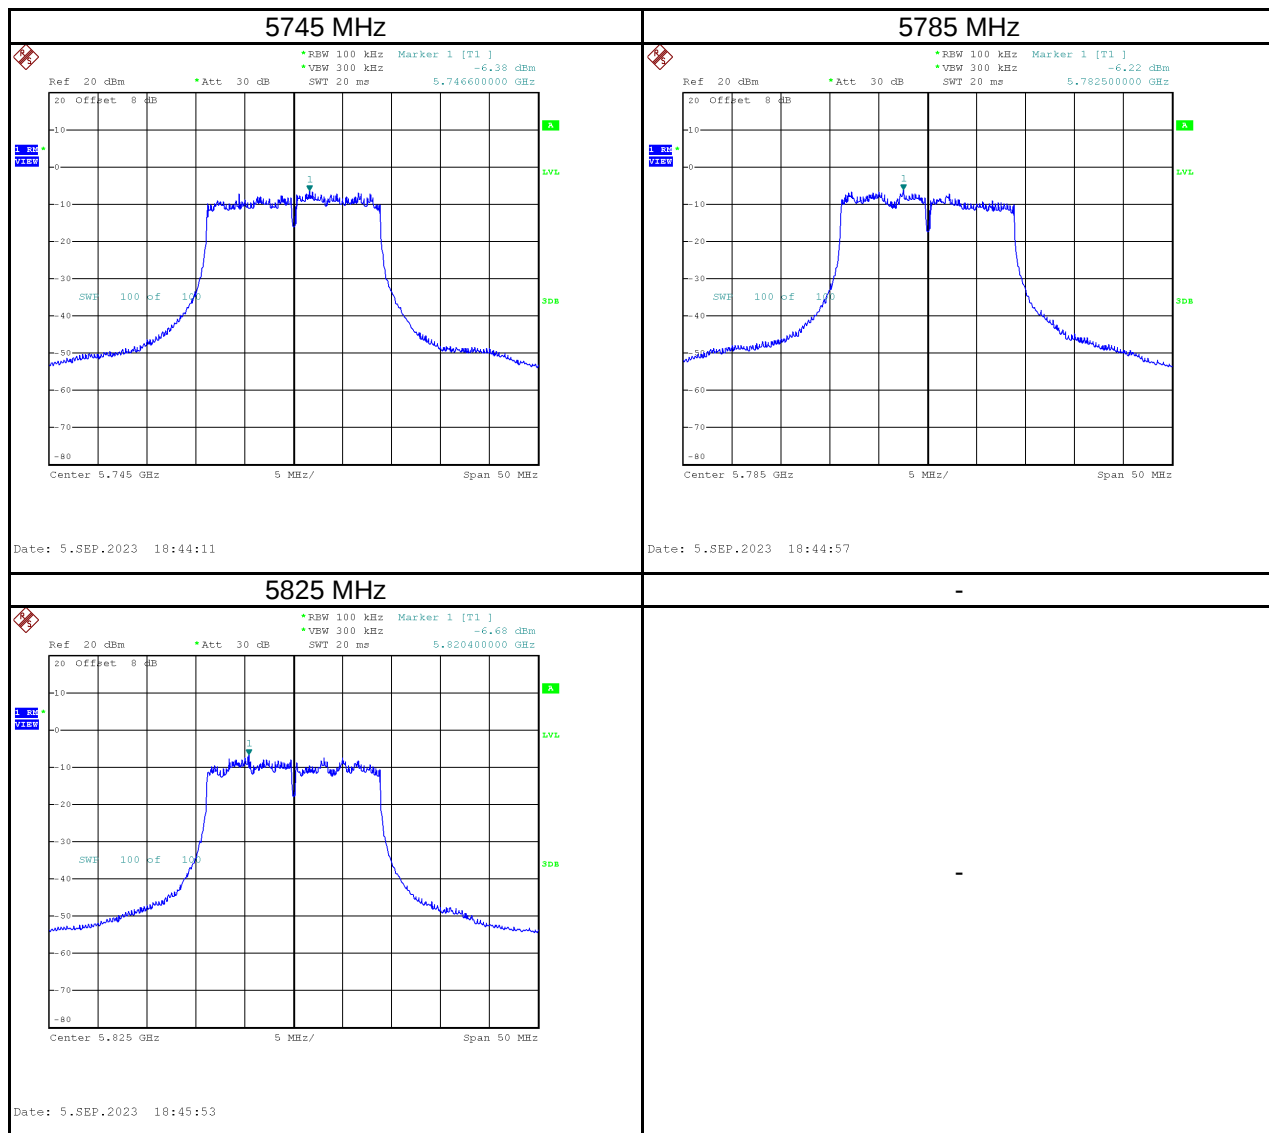


Test Mode IEEE 802.11a\_Ant.4

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 11.66                   | 0.00             | 11.66                              | 14.98                   | Pass   |
| 5200                 | 11.42                   | 0.00             | 11.42                              | 14.98                   | Pass   |
| 5240                 | 11.49                   | 0.00             | 11.49                              | 14.98                   | Pass   |

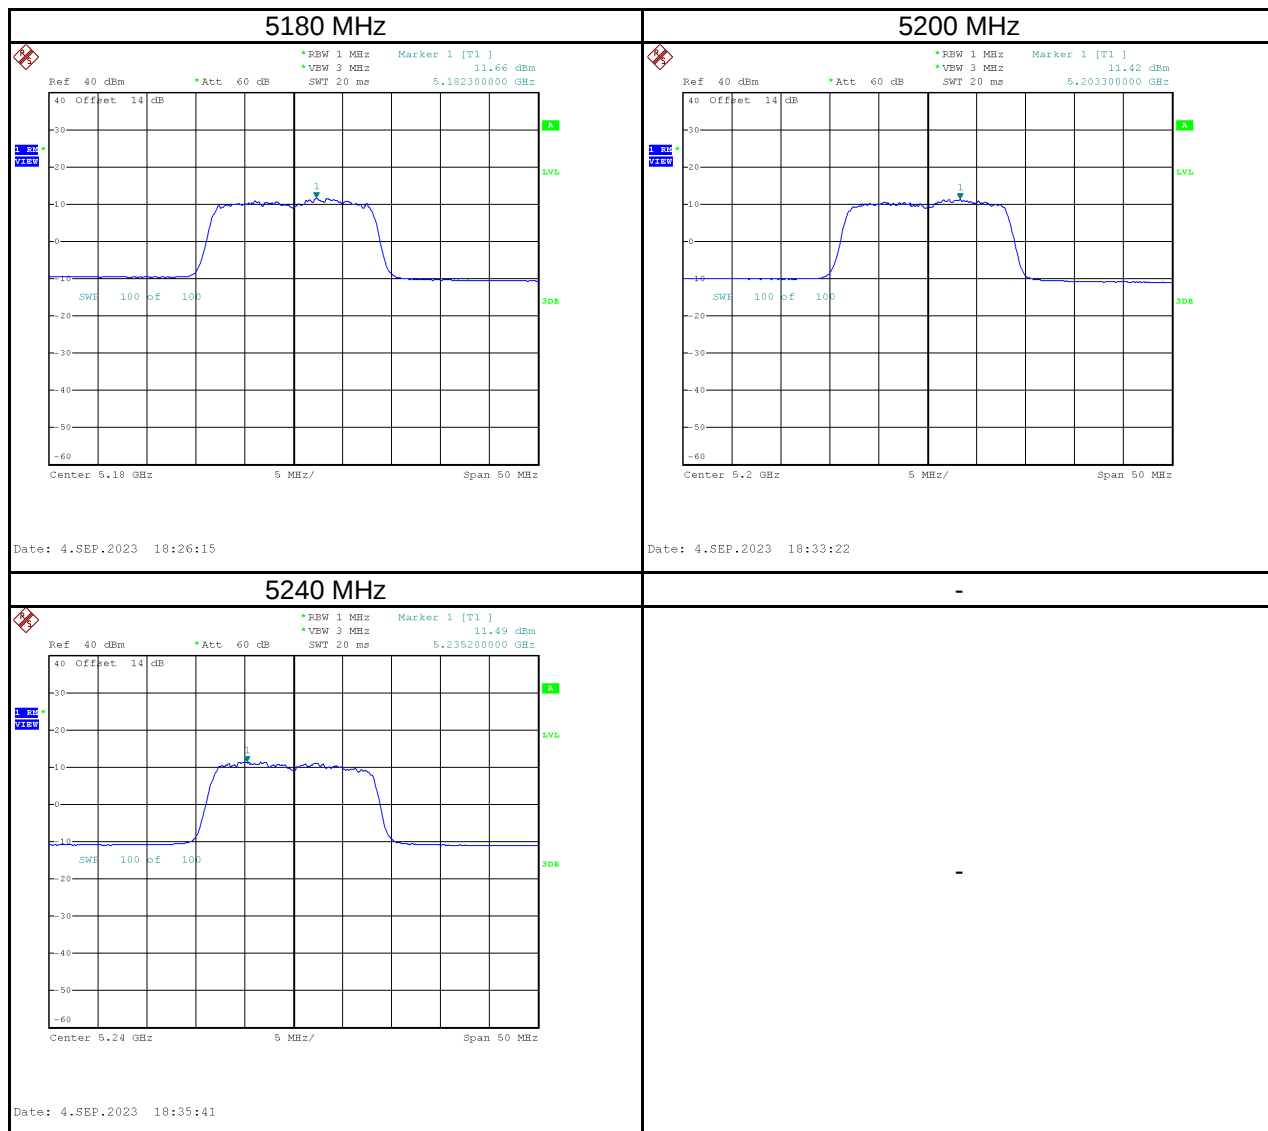

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | 9.41                        | 16.40                       | 0.00             | 16.40                                  | 27.98                       | Pass   |
| 5785                 | 8.71                        | 15.70                       | 0.00             | 15.70                                  | 27.98                       | Pass   |
| 5825                 | 8.89                        | 15.88                       | 0.00             | 15.88                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

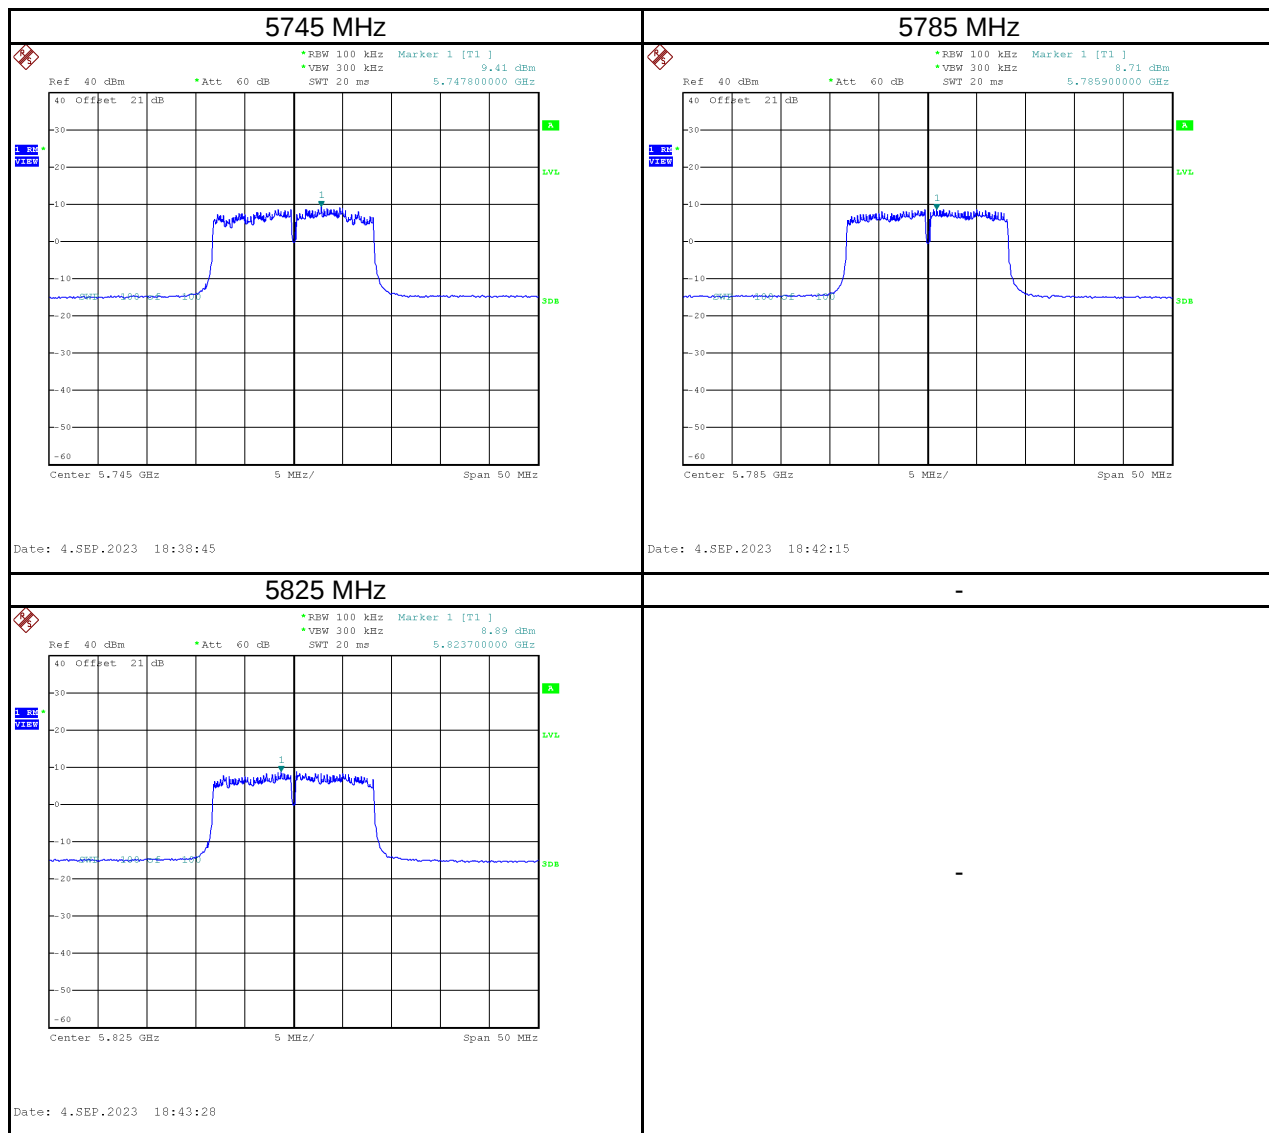


Test Mode IEEE 802.11a\_Total

| Frequency (MHz) | Power Spectral Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|-----------------|----------------------------------|----------------------|--------|
| 5180            | 14.78                            | 14.98                | Pass   |
| 5200            | 14.57                            | 14.98                | Pass   |
| 5240            | 14.31                            | 14.98                | Pass   |
| 5745            | 19.30                            | 27.98                | Pass   |
| 5785            | 19.17                            | 27.98                | Pass   |
| 5825            | 18.92                            | 27.98                | Pass   |


|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT20)_Ant.1 |
|-----------|---------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 10.28                   | 0.00             | 10.28                              | 14.98                   | Pass   |
| 5200                 | 10.47                   | 0.00             | 10.47                              | 14.98                   | Pass   |
| 5240                 | 9.76                    | 0.00             | 9.76                               | 14.98                   | Pass   |

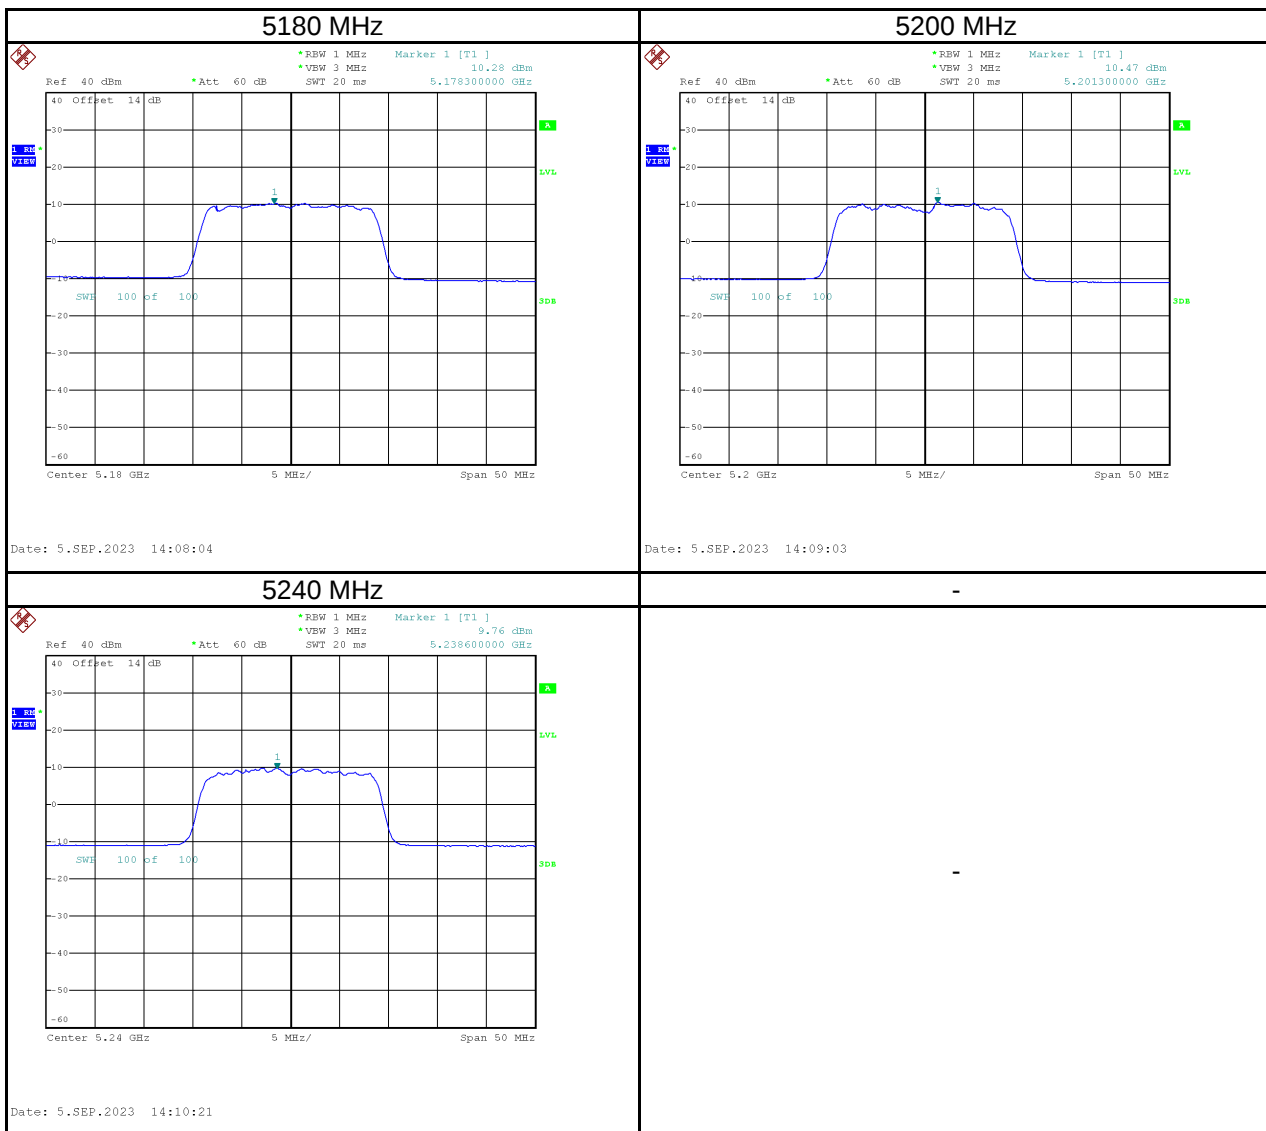


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | 7.75                        | 14.74                       | 0.00             | 14.74                                  | 27.98                       | Pass   |
| 5785                 | 7.86                        | 14.85                       | 0.00             | 14.85                                  | 27.98                       | Pass   |
| 5825                 | 7.63                        | 14.62                       | 0.00             | 14.62                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

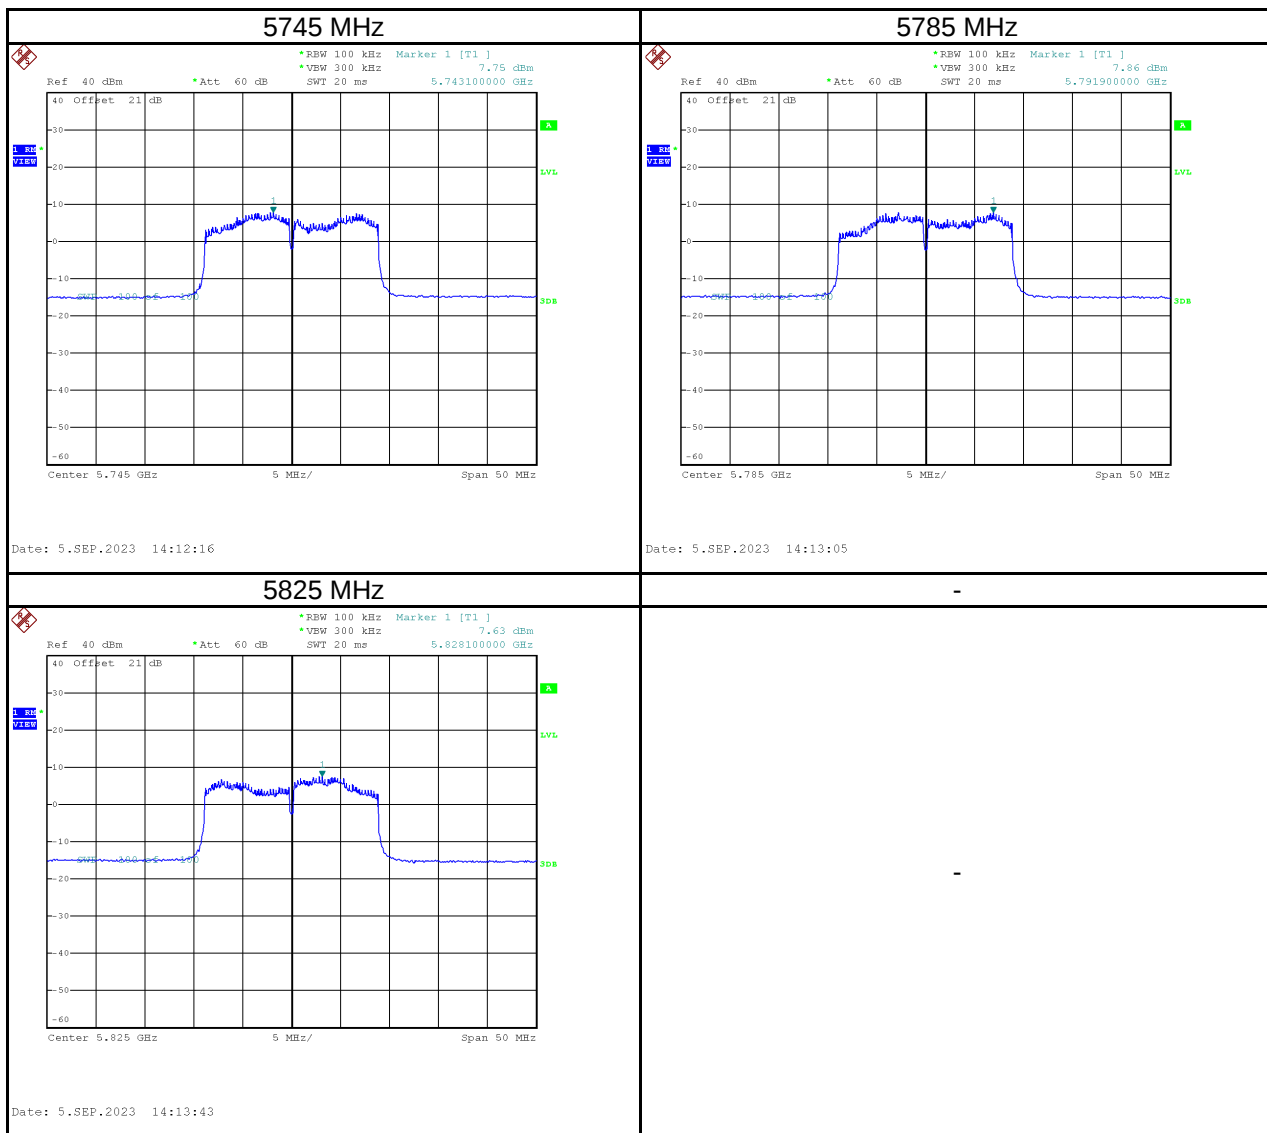


|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT20)_Ant.2 |
|-----------|---------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | -2.41                   | 0.00             | -2.41                              | 14.98                   | Pass   |
| 5200                 | -3.28                   | 0.00             | -3.28                              | 14.98                   | Pass   |
| 5240                 | -2.42                   | 0.00             | -2.42                              | 14.98                   | Pass   |

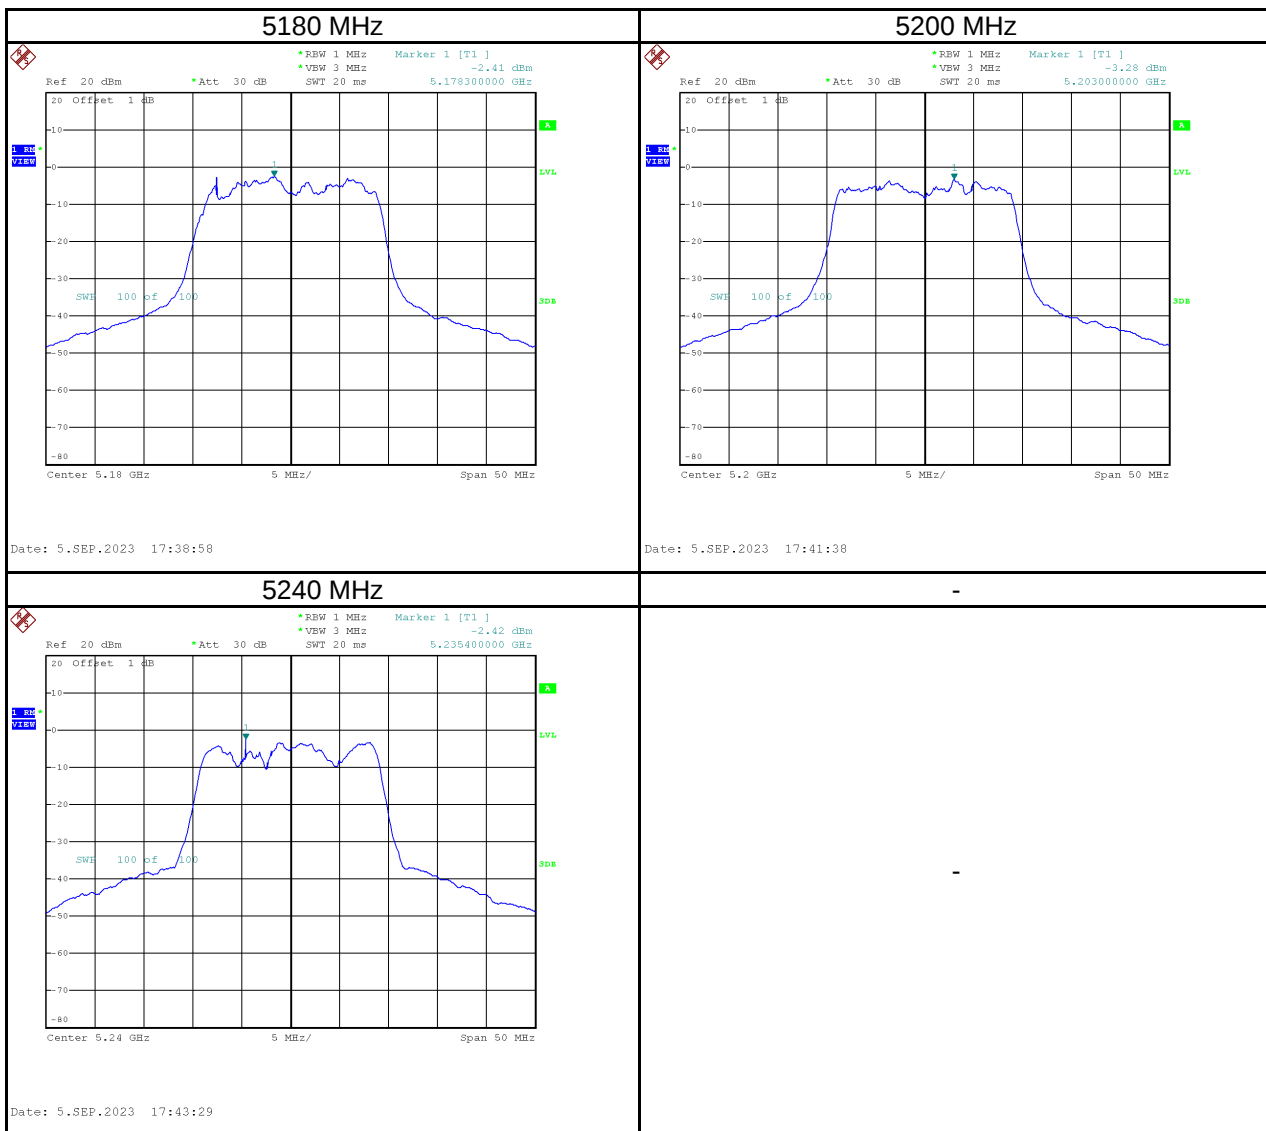


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | -4.72                       | 2.27                        | 0.00             | 2.27                                   | 27.98                       | Pass   |
| 5785                 | -5.56                       | 1.43                        | 0.00             | 1.43                                   | 27.98                       | Pass   |
| 5825                 | -4.62                       | 2.37                        | 0.00             | 2.37                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

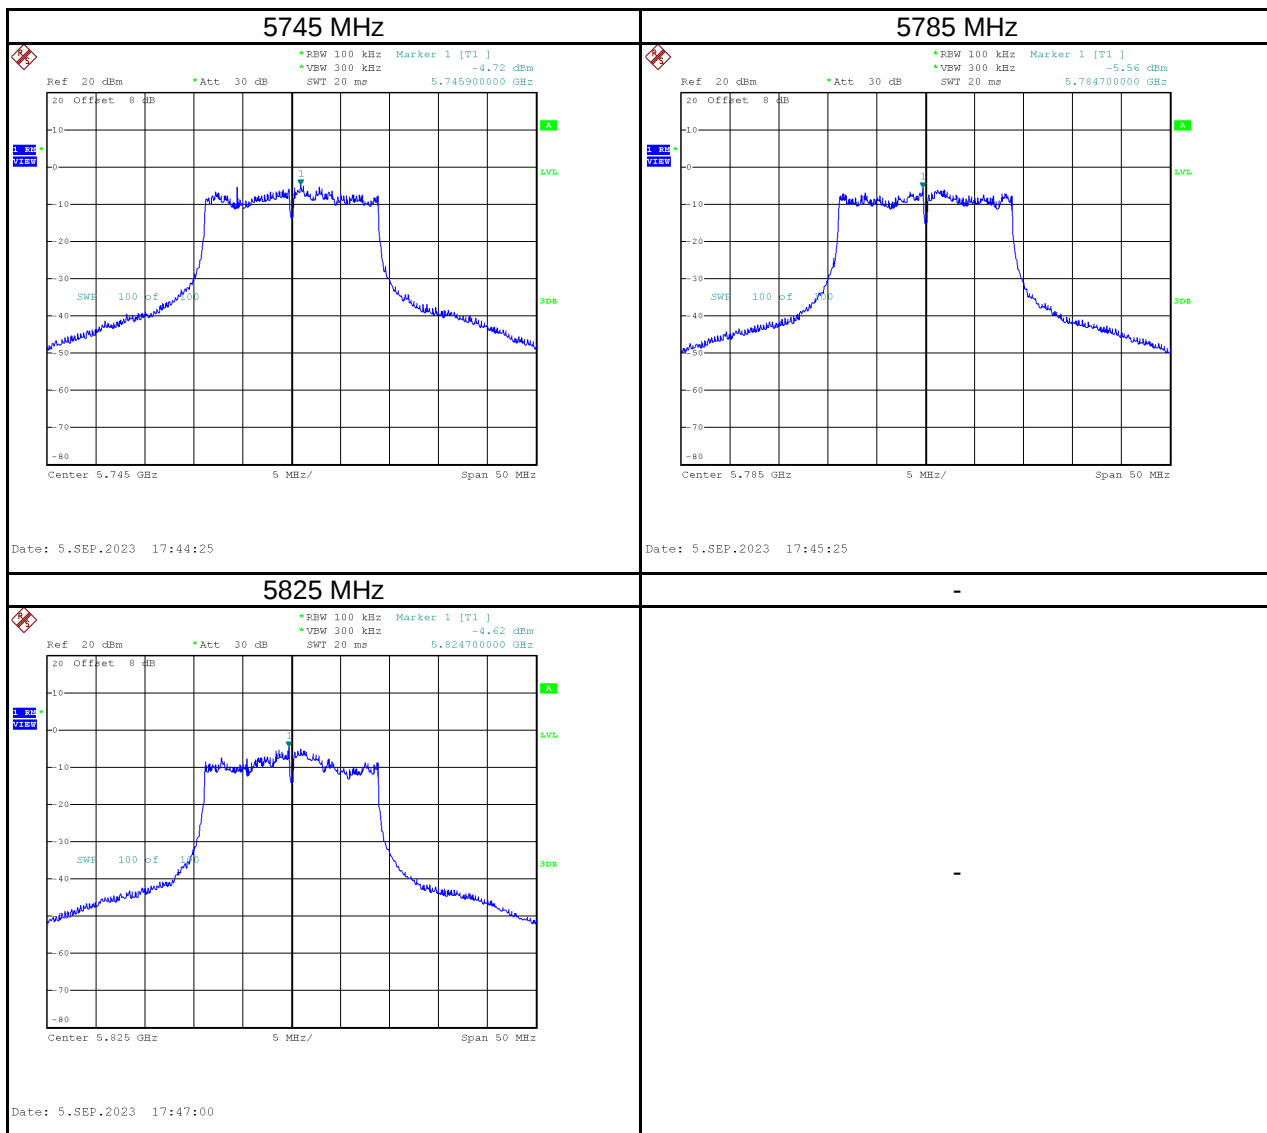


|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT20)_Ant.3 |
|-----------|---------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | -4.25                   | 0.00             | -4.25                              | 14.98                   | Pass   |
| 5200                 | -4.38                   | 0.00             | -4.38                              | 14.98                   | Pass   |
| 5240                 | -3.83                   | 0.00             | -3.83                              | 14.98                   | Pass   |

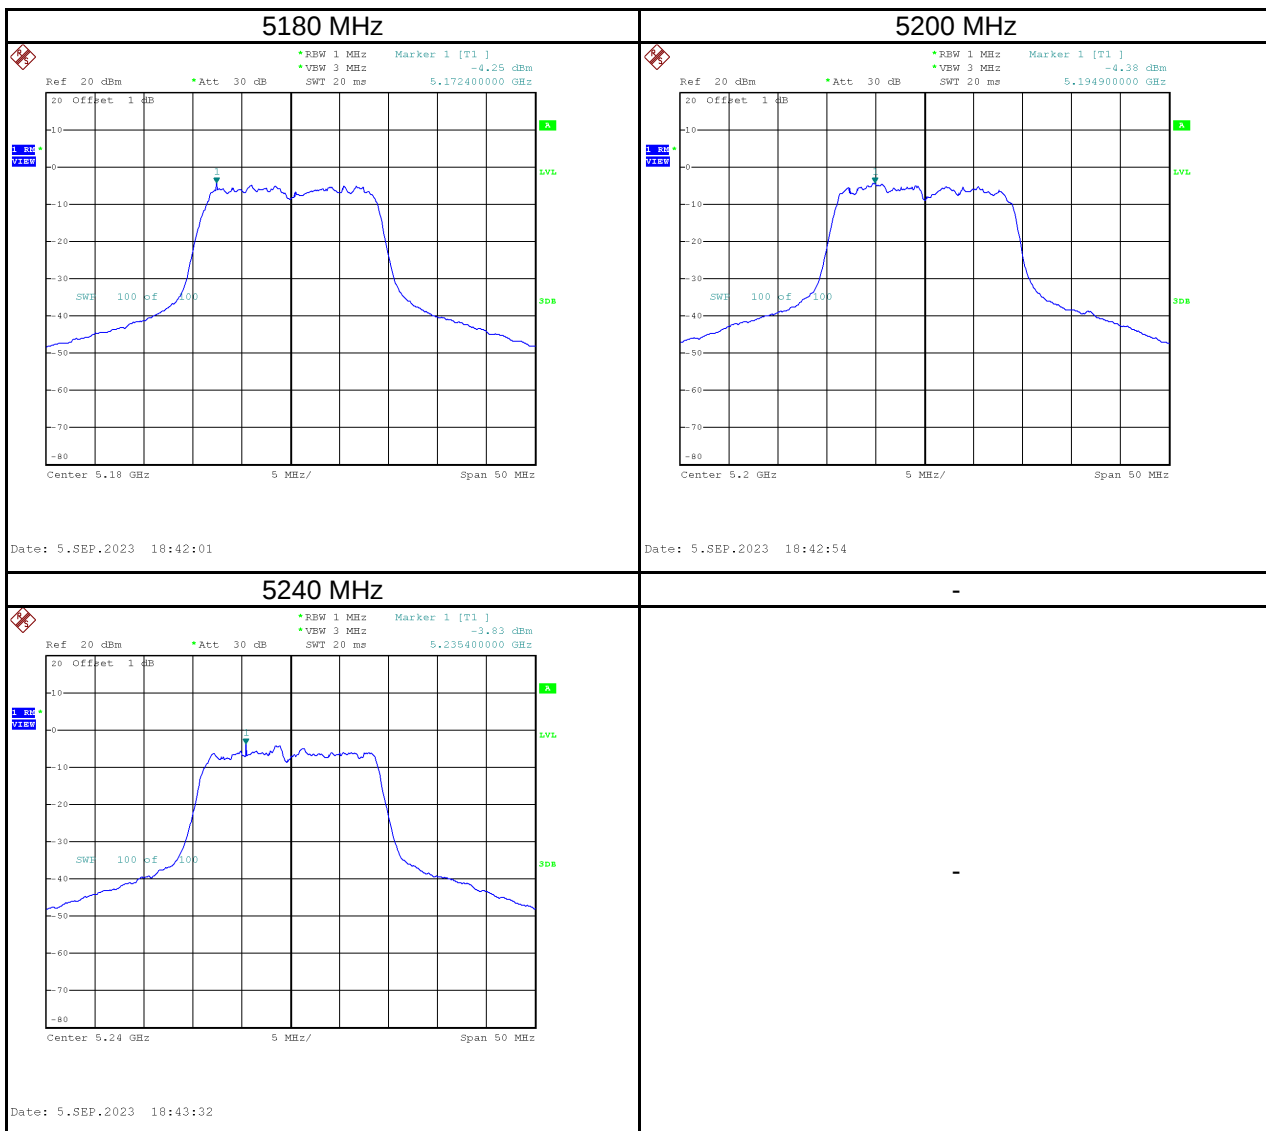


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | -6.38                       | 0.61                        | 0.00             | 0.61                                   | 27.98                       | Pass   |
| 5785                 | -6.22                       | 0.77                        | 0.00             | 0.77                                   | 27.98                       | Pass   |
| 5825                 | -6.68                       | 0.31                        | 0.00             | 0.31                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

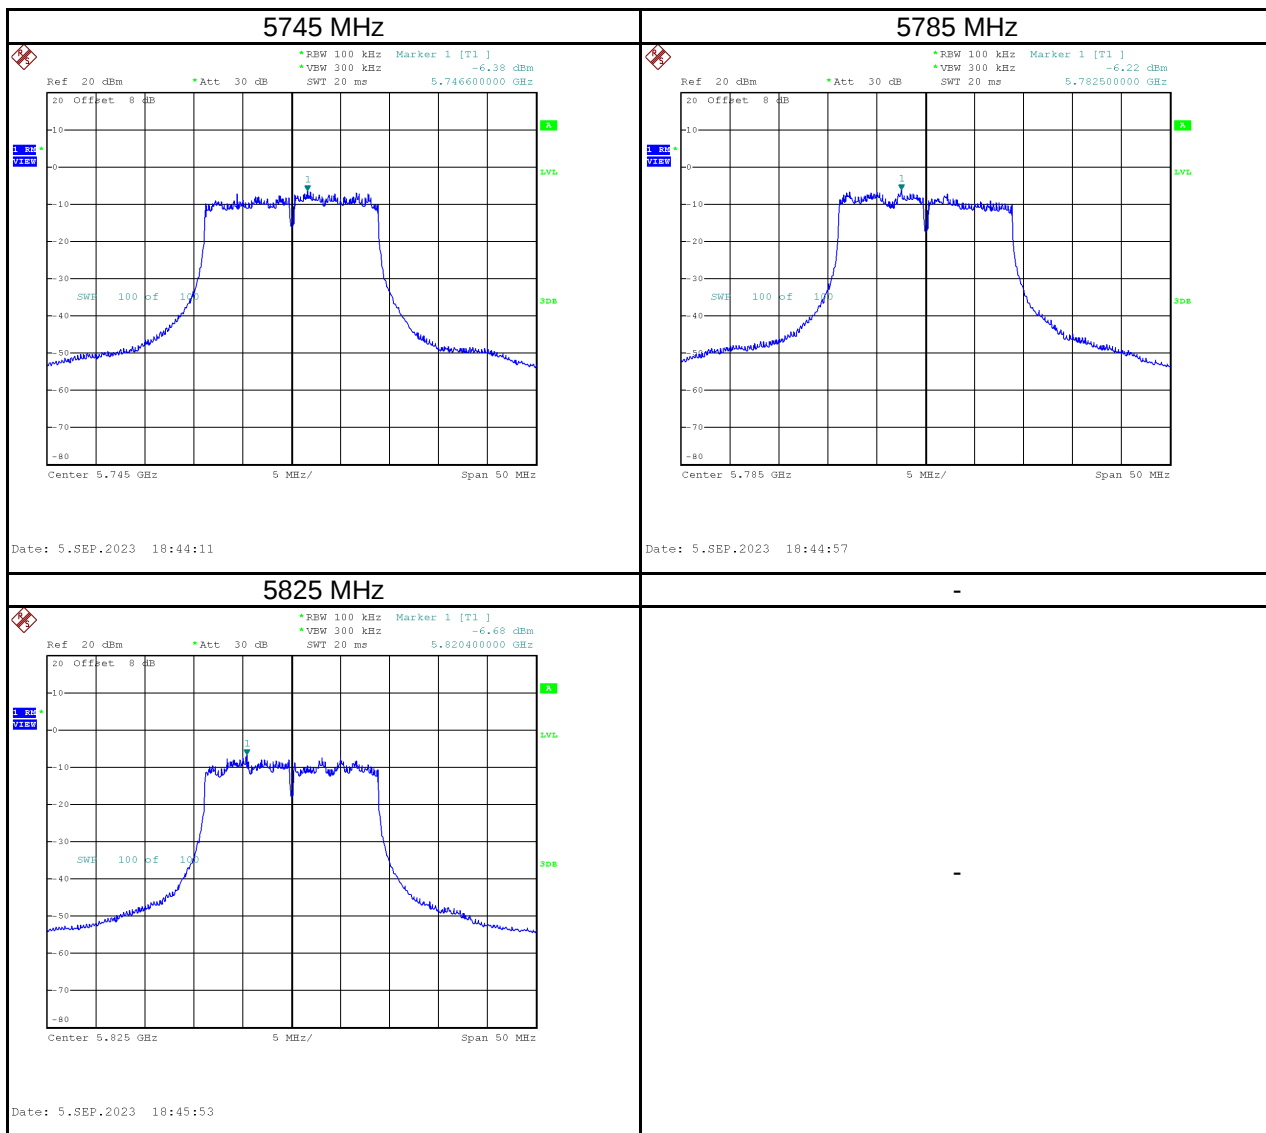


|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT20)_Ant.4 |
|-----------|---------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 9.93                    | 0.00             | 9.93                               | 14.98                   | Pass   |
| 5200                 | 10.94                   | 0.00             | 10.94                              | 14.98                   | Pass   |
| 5240                 | 10.95                   | 0.00             | 10.95                              | 14.98                   | Pass   |

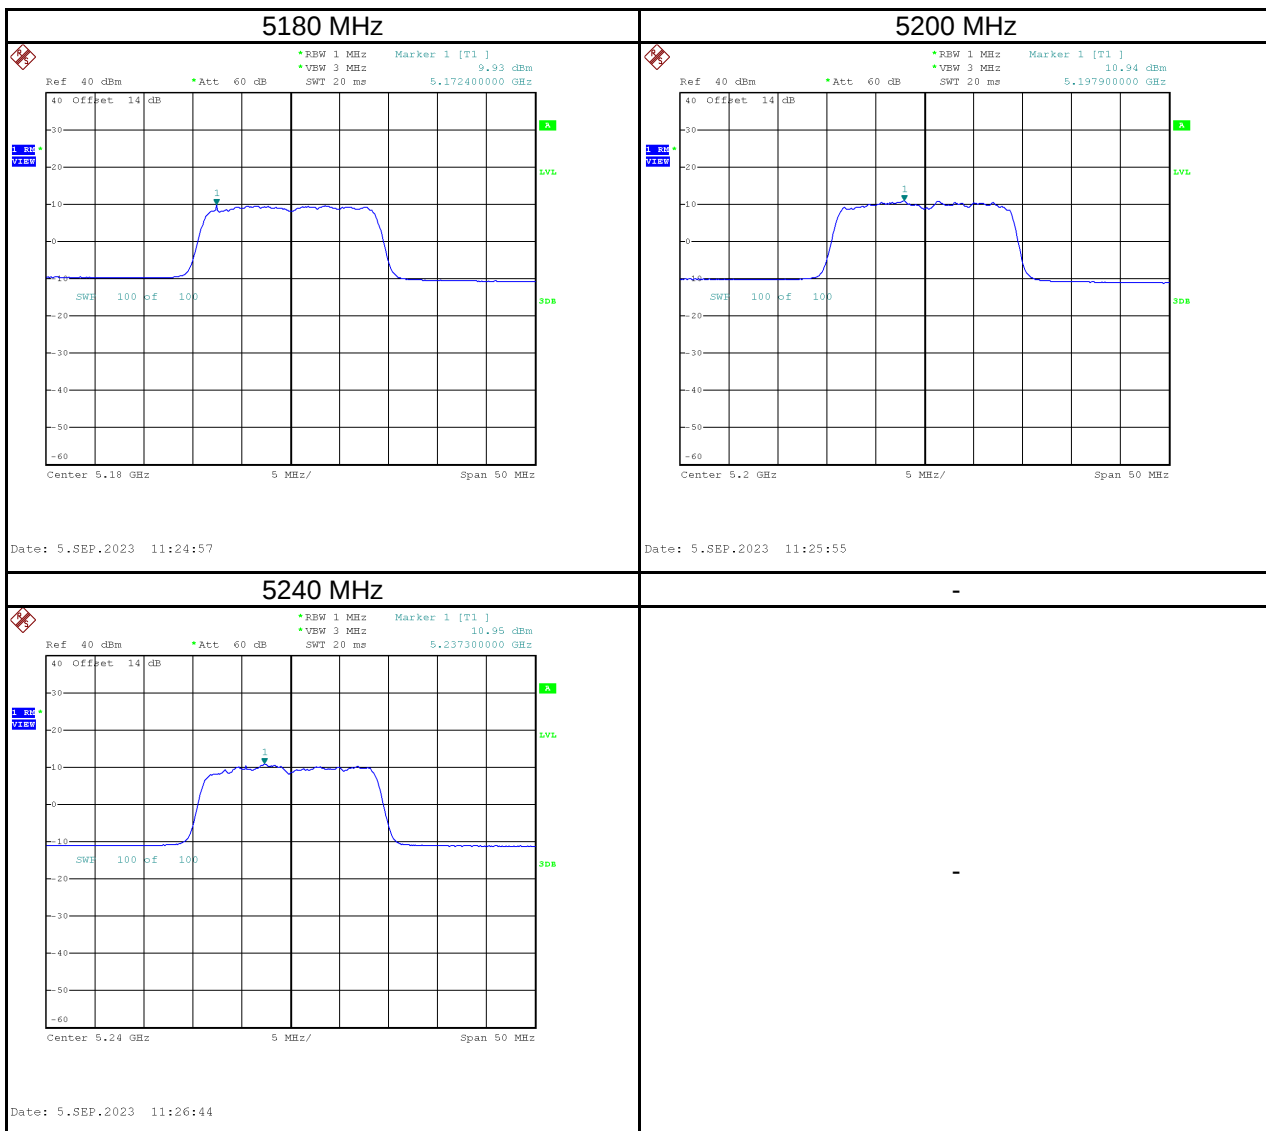

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | 8.50                        | 15.49                       | 0.00             | 15.49                                  | 27.98                       | Pass   |
| 5785                 | 8.36                        | 15.35                       | 0.00             | 15.35                                  | 27.98                       | Pass   |
| 5825                 | 7.85                        | 14.84                       | 0.00             | 14.84                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

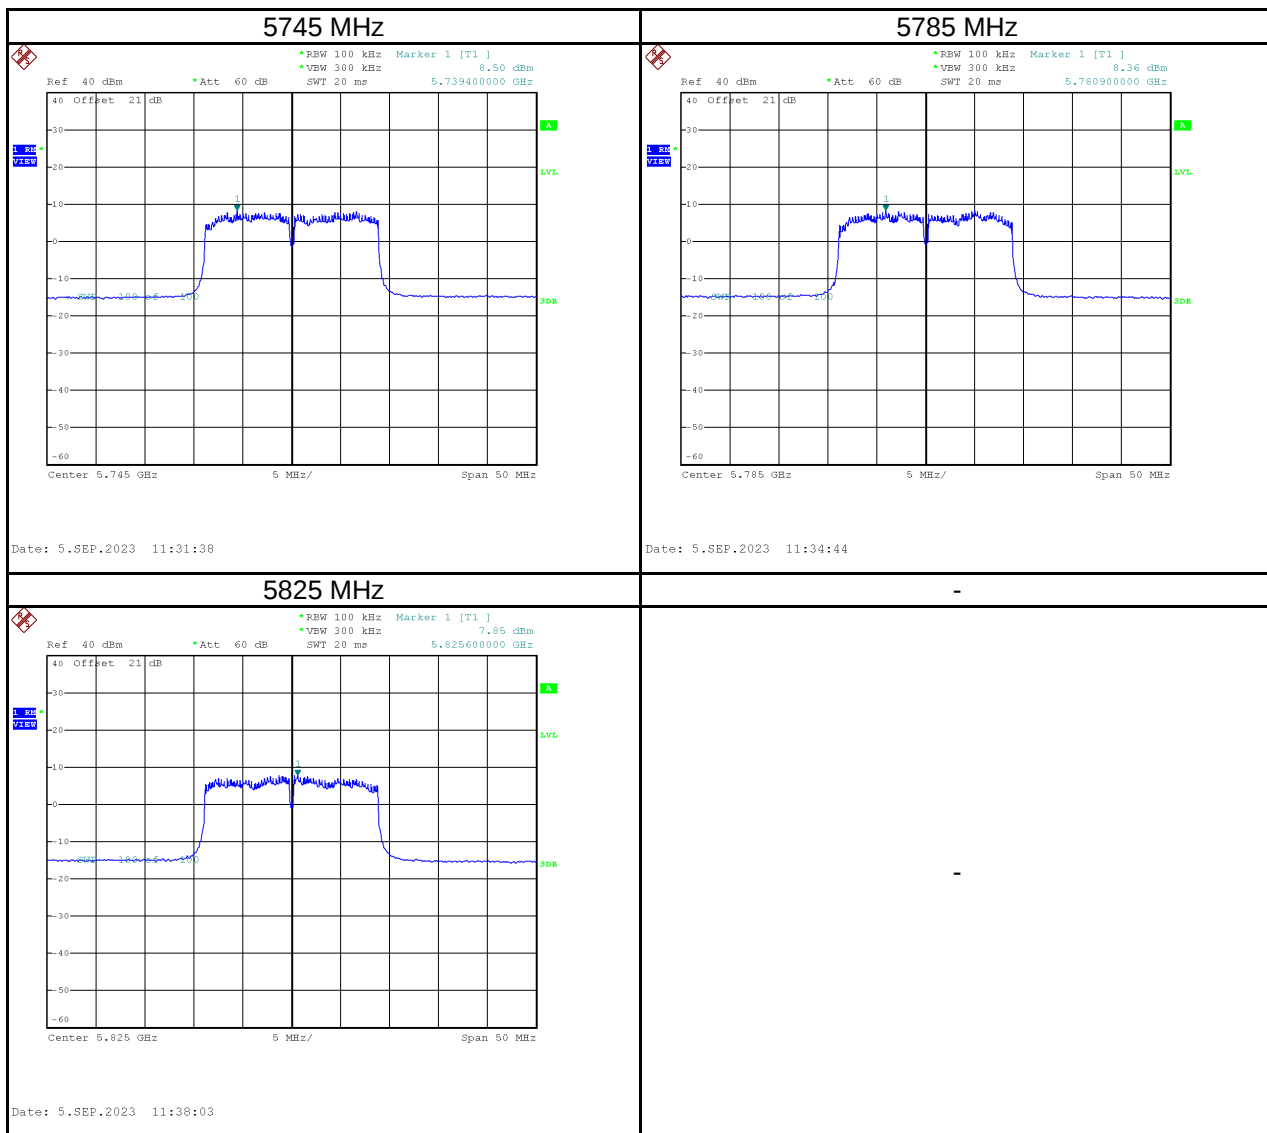


|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT20)_Total |
|-----------|---------------------------|


| Frequency (MHz) | Power Spectral Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|-----------------|----------------------------------|----------------------|--------|
| 5180            | 13.32                            | 14.98                | Pass   |
| 5200            | 13.87                            | 14.98                | Pass   |
| 5240            | 13.60                            | 14.98                | Pass   |
| 5745            | 18.33                            | 27.98                | Pass   |
| 5785            | 18.29                            | 27.98                | Pass   |
| 5825            | 17.94                            | 27.98                | Pass   |

Test Mode IEEE 802.11n (HT40)\_Ant.1

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 8.16                    | 0.00             | 8.16                               | 14.98                   | Pass   |
| 5230                 | 8.30                    | 0.00             | 8.30                               | 14.98                   | Pass   |

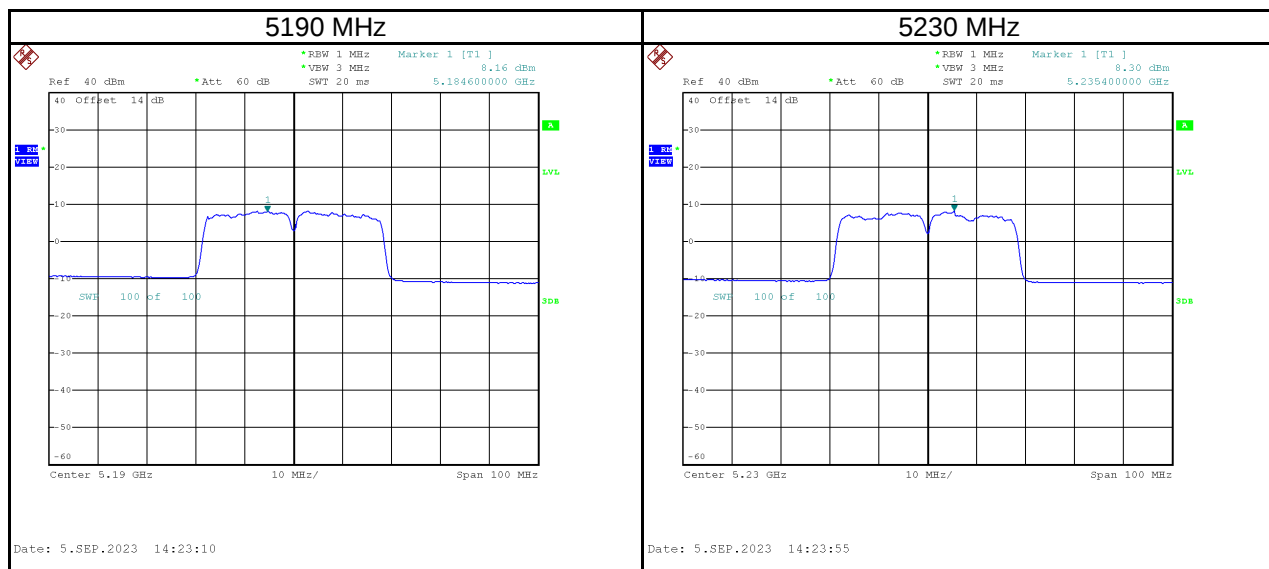


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | 4.86                        | 11.85                       | 0.00             | 11.85                                  | 27.98                       | Pass   |
| 5795                 | 5.22                        | 12.21                       | 0.00             | 12.21                                  | 27.98                       | Pass   |

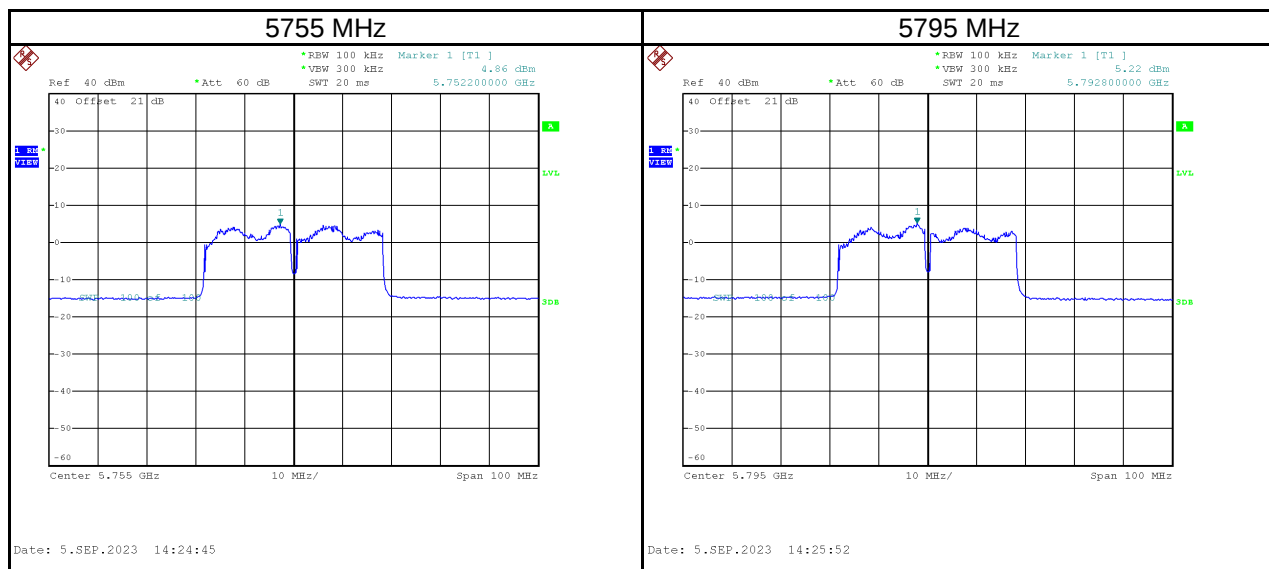
NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$ 


Test Mode IEEE 802.11n (HT40)\_Ant.2

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | -6.26                   | 0.00             | -6.26                              | 14.98                   | Pass   |
| 5230                 | -5.62                   | 0.00             | -5.62                              | 14.98                   | Pass   |

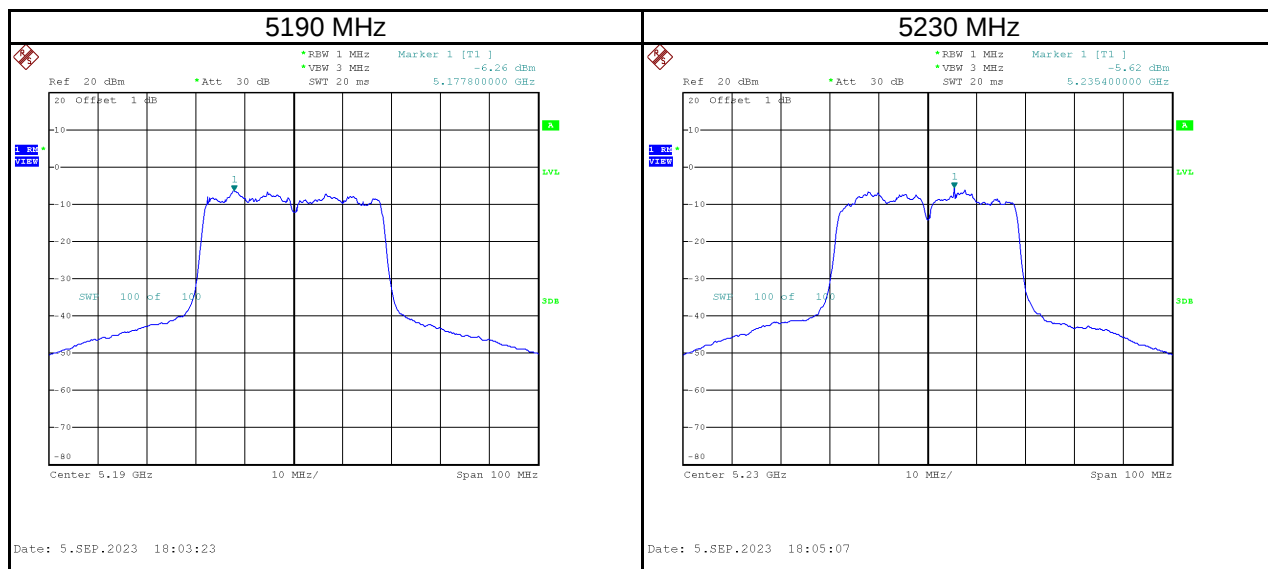


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | -8.48                       | -1.49                       | 0.00             | -1.49                                  | 27.98                       | Pass   |
| 5795                 | -8.92                       | -1.93                       | 0.00             | -1.93                                  | 27.98                       | Pass   |

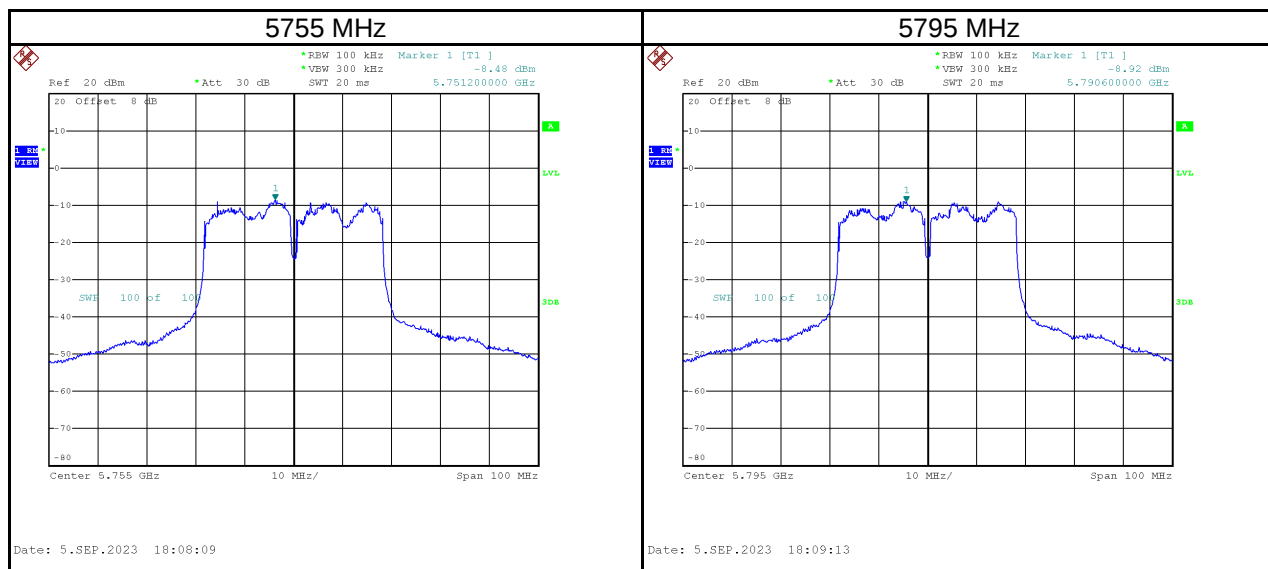
NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$ 


Test Mode IEEE 802.11n (HT40)\_Ant.3

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | -6.43                   | 0.00             | -6.43                              | 14.98                   | Pass   |
| 5230                 | -5.36                   | 0.00             | -5.36                              | 14.98                   | Pass   |

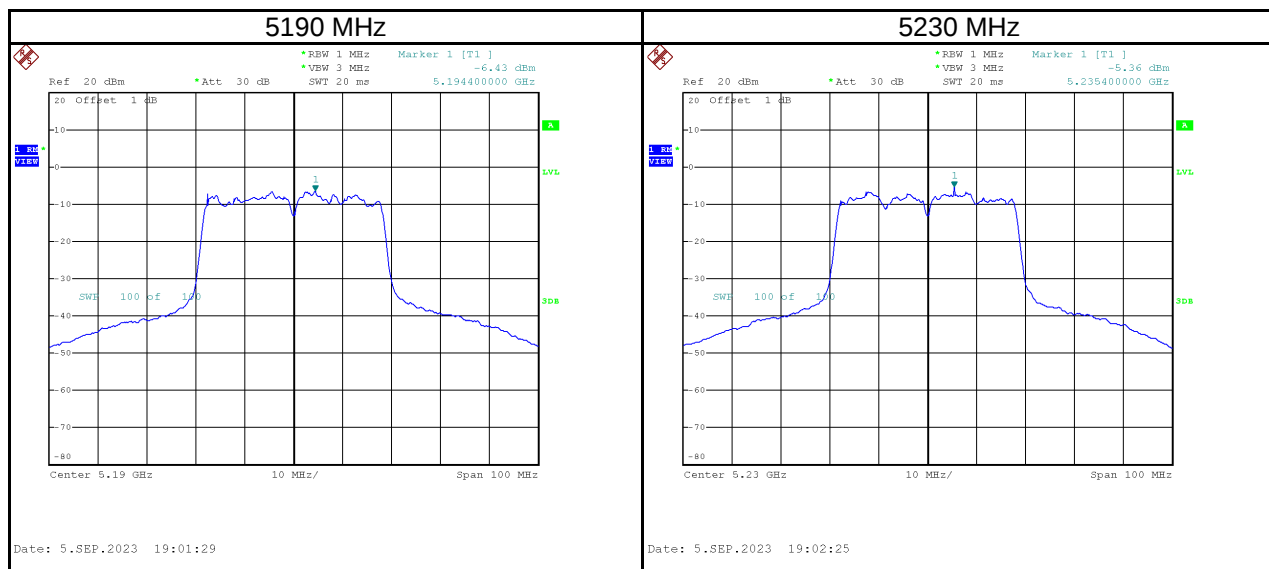


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | -7.18                       | -0.19                       | 0.00             | -0.19                                  | 27.98                       | Pass   |
| 5795                 | -9.52                       | -2.53                       | 0.00             | -2.53                                  | 27.98                       | Pass   |

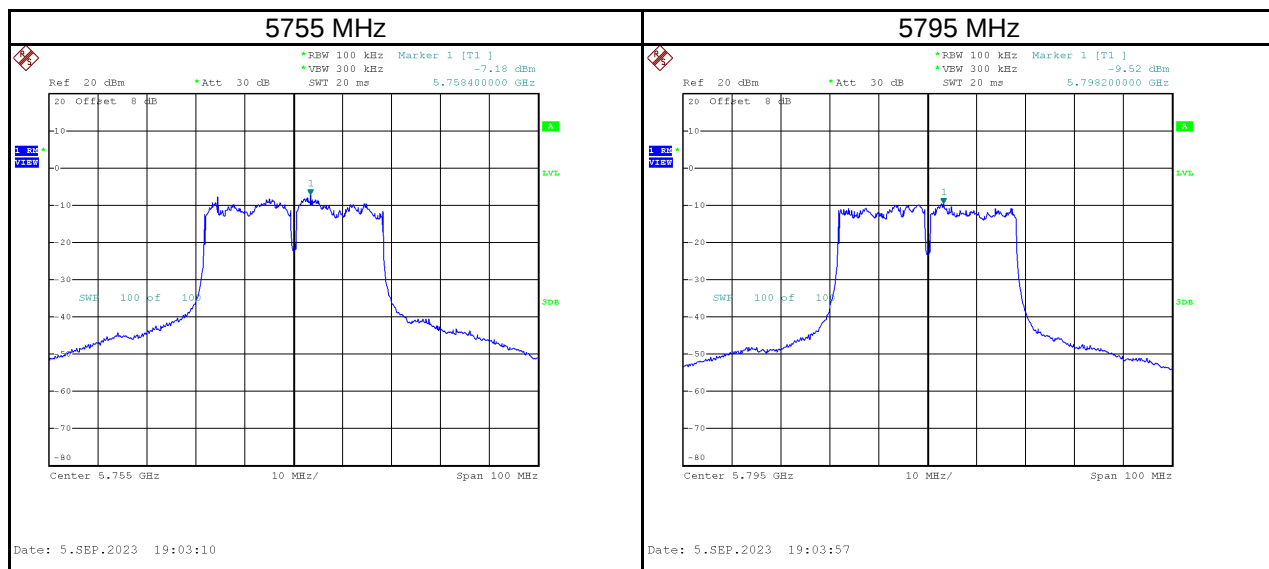NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$ 


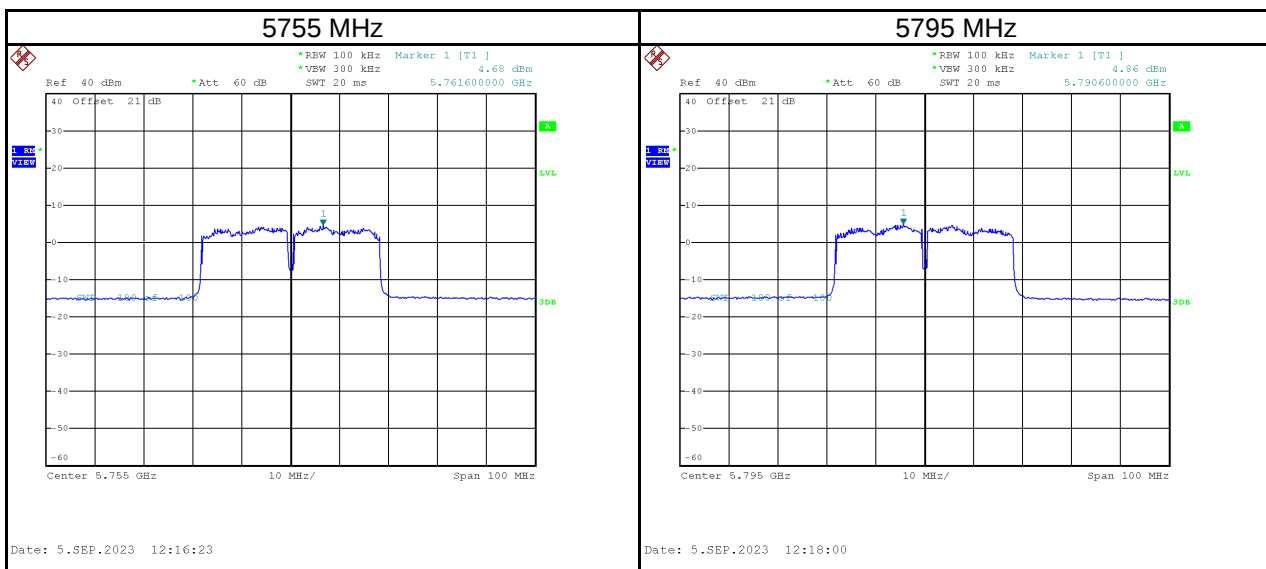
|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT40)_Ant.4 |
|-----------|---------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 8.41                    | 0.00             | 8.41                               | 14.98                   | Pass   |
| 5230                 | 8.57                    | 0.00             | 8.57                               | 14.98                   | Pass   |

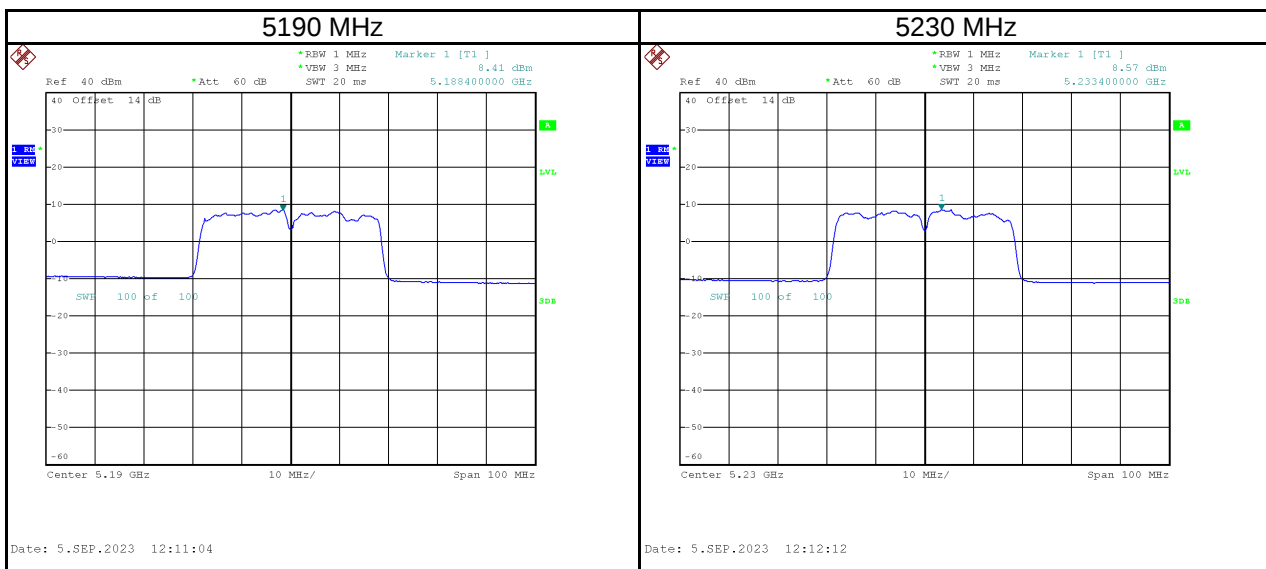

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | 4.68                        | 11.67                       | 0.00             | 11.67                                  | 27.98                       | Pass   |
| 5795                 | 4.86                        | 11.85                       | 0.00             | 11.85                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$




|           |                           |
|-----------|---------------------------|
| Test Mode | IEEE 802.11n (HT40)_Total |
|-----------|---------------------------|

| Frequency (MHz) | Power Spectral Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|-----------------|----------------------------------|----------------------|--------|
| 5190            | 11.44                            | 14.98                | Pass   |
| 5230            | 11.62                            | 14.98                | Pass   |
| 5755            | 15.01                            | 27.98                | Pass   |
| 5795            | 15.20                            | 27.98                | Pass   |


|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.1 |
|-----------|-----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | 4.89                    | 0.00             | 4.89                               | 14.98                   | Pass   |

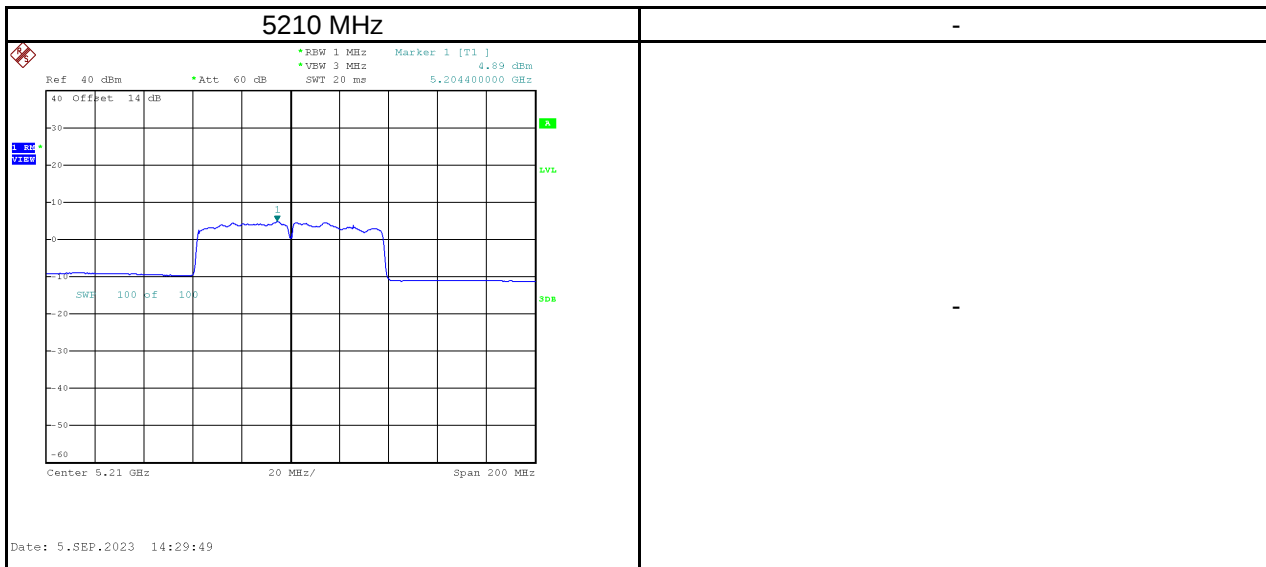


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | 1.62                        | 8.61                        | 0.00             | 8.61                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

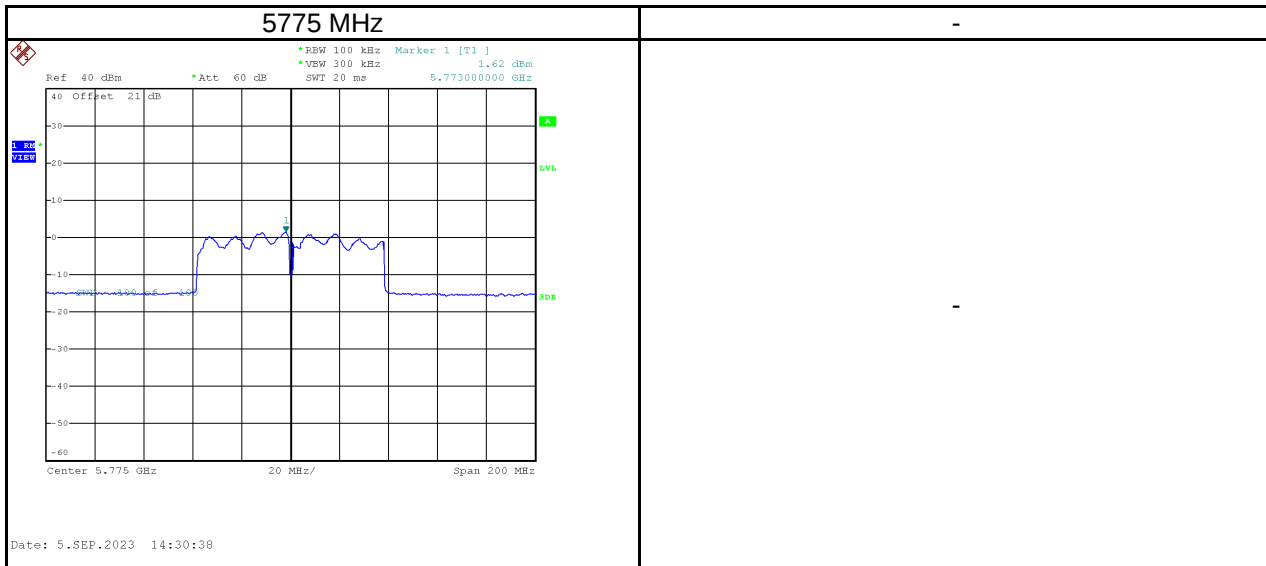


|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.2 |
|-----------|-----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | -9.43                   | 0.00             | -9.43                              | 14.98                   | Pass   |

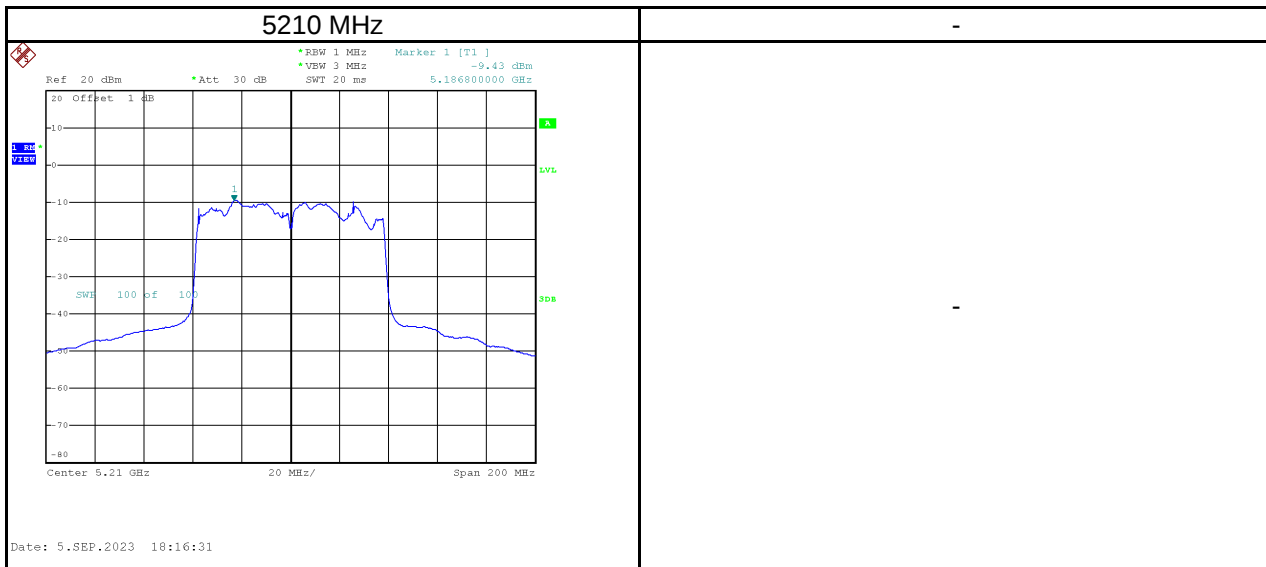


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | -11.36                      | -4.37                       | 0.00             | -4.37                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

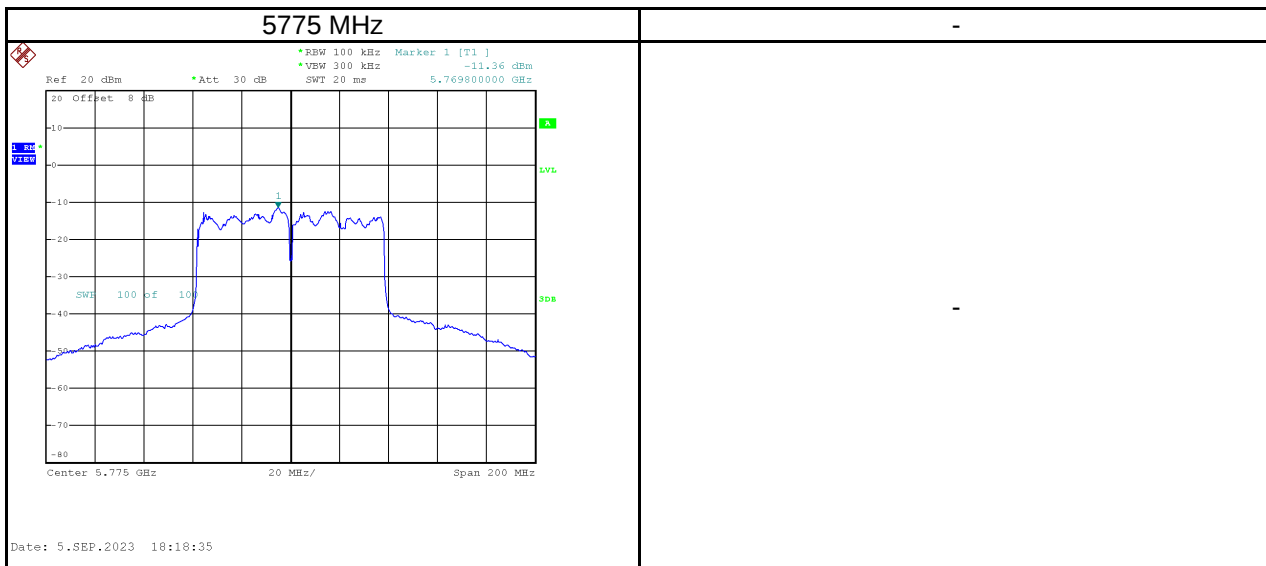


|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.3 |
|-----------|-----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | -9.05                   | 0.00             | -9.05                              | 14.98                   | Pass   |

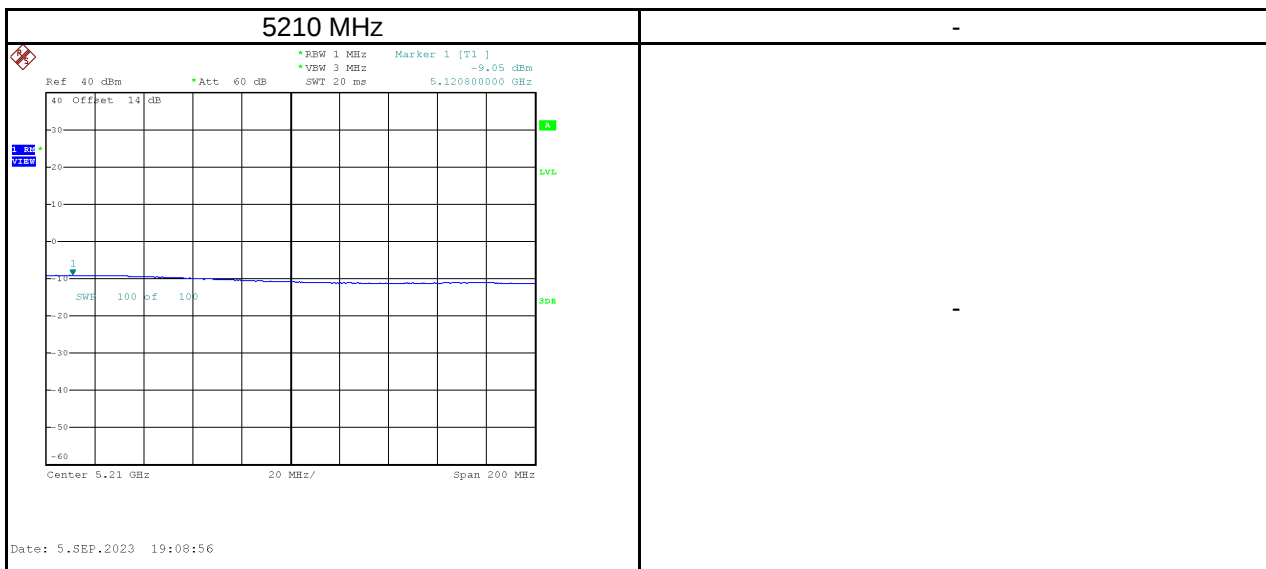


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | 1.77                        | 8.76                        | 0.00             | 8.76                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

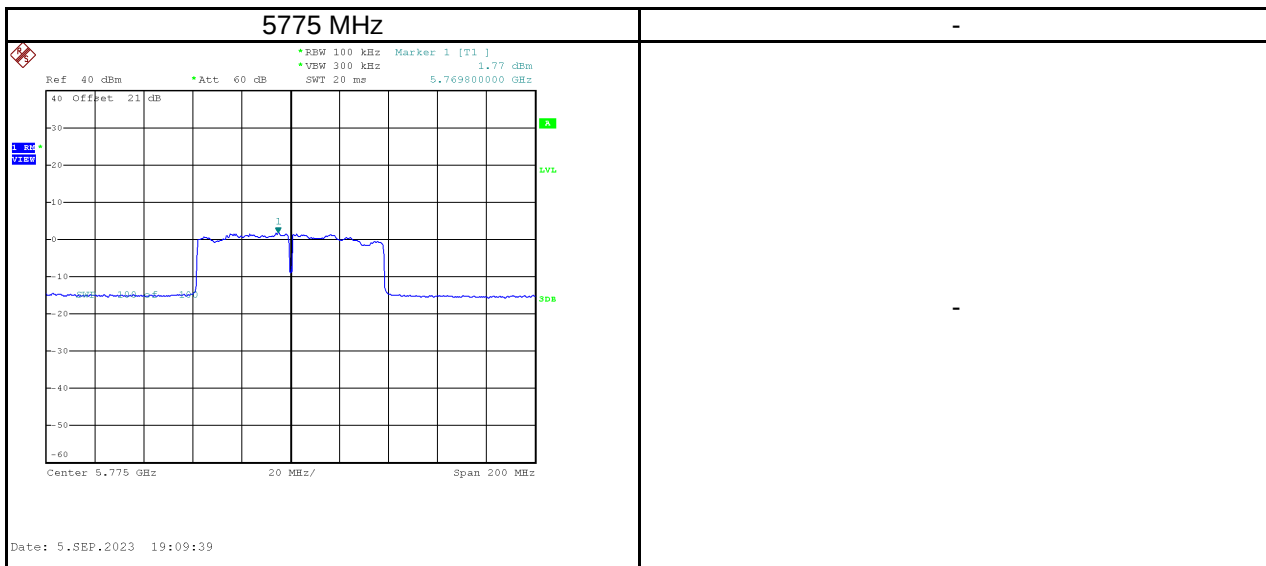


|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Ant.4 |
|-----------|-----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | 5.10                    | 0.00             | 5.10                               | 14.98                   | Pass   |

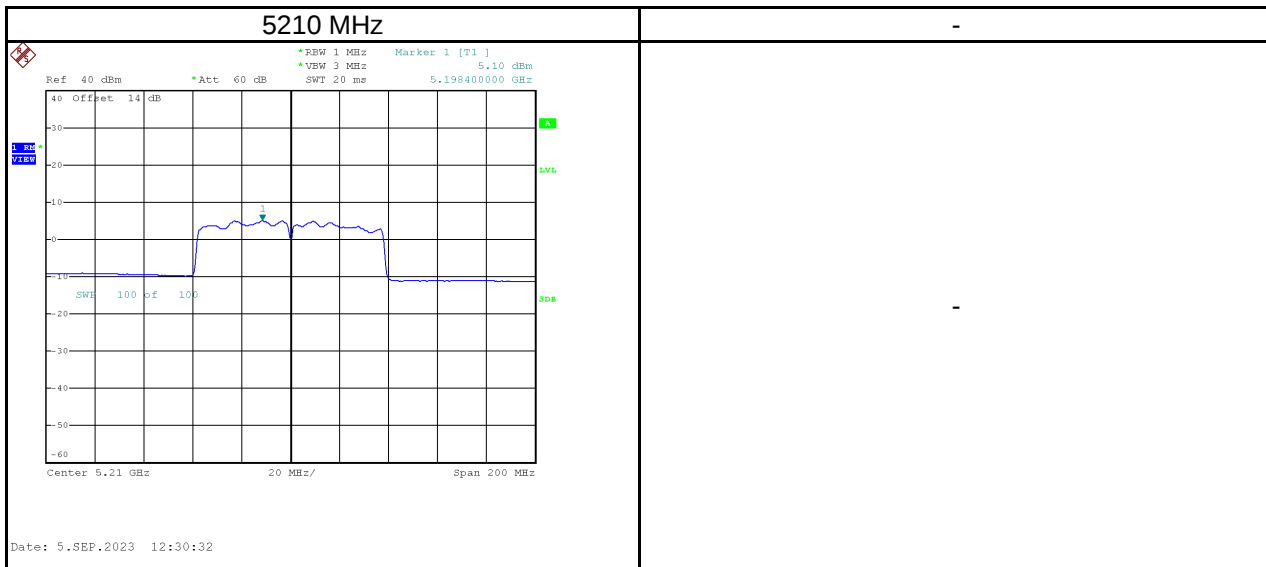

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | 1.39                        | 8.38                        | 0.00             | 8.38                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

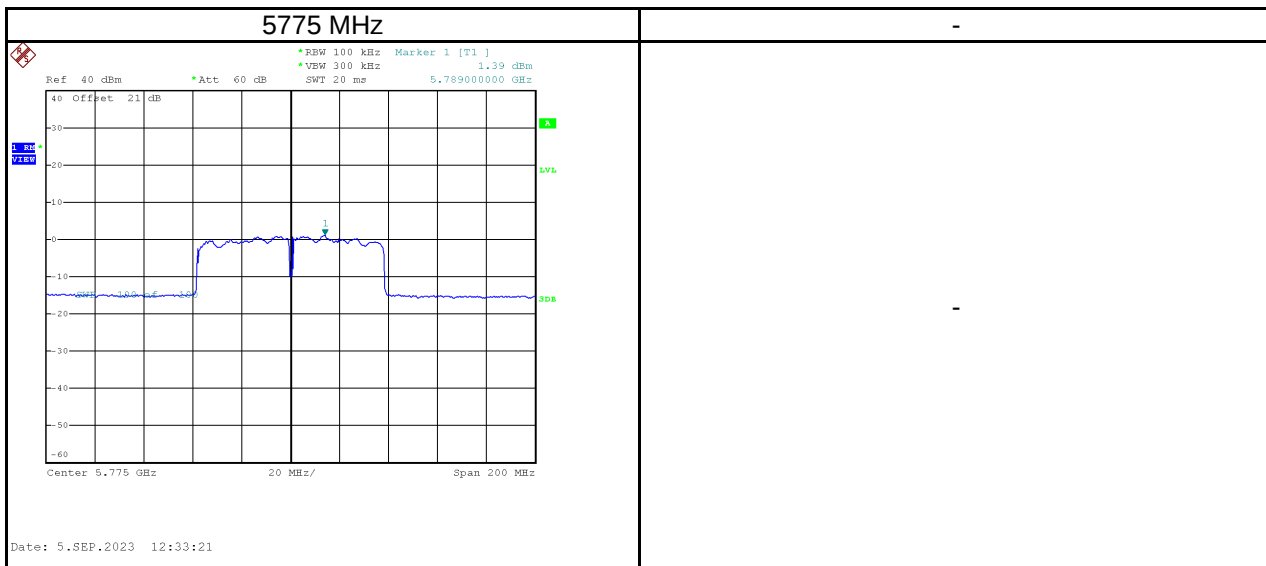


|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT80)_Total |
|-----------|-----------------------------|

| Frequency (MHz) | Power Spectral Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|-----------------|----------------------------------|----------------------|--------|
| 5210            | 8.96                             | 14.98                | Pass   |
| 5775            | 13.43                            | 27.98                | Pass   |


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.1 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 11.02                   | 0.00             | 11.02                              | 14.98                   | Pass   |
| 5200                 | 10.49                   | 0.00             | 10.49                              | 14.98                   | Pass   |
| 5240                 | 10.22                   | 0.00             | 10.22                              | 14.98                   | Pass   |

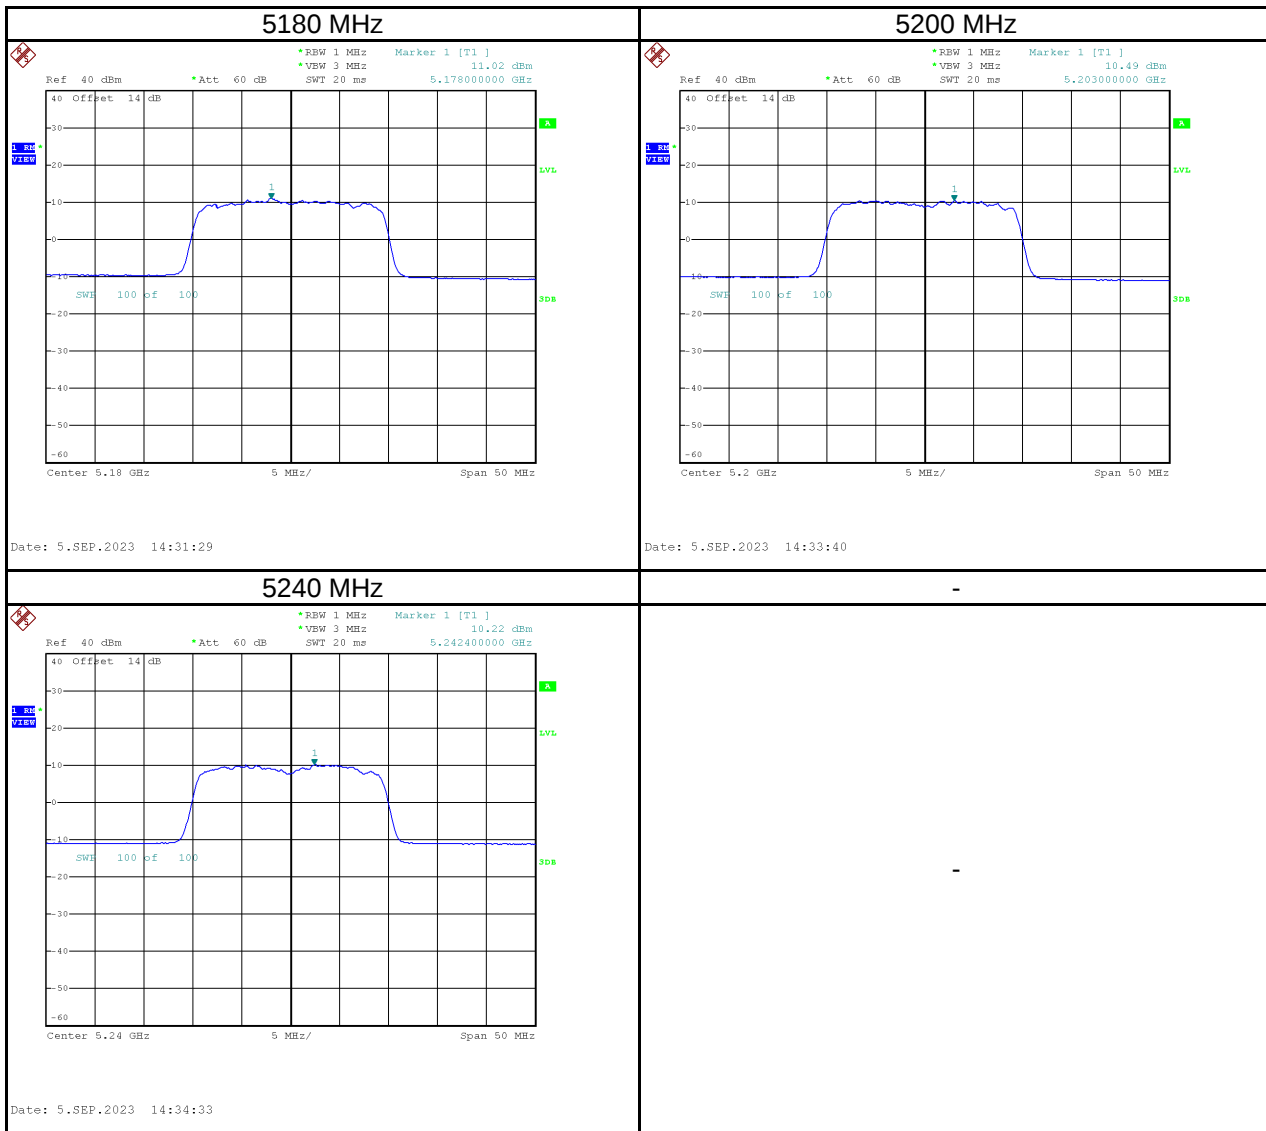


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | 7.46                        | 14.45                       | 0.00             | 14.45                                  | 27.98                       | Pass   |
| 5785                 | 6.75                        | 13.74                       | 0.00             | 13.74                                  | 27.98                       | Pass   |
| 5825                 | 6.92                        | 13.91                       | 0.00             | 13.91                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

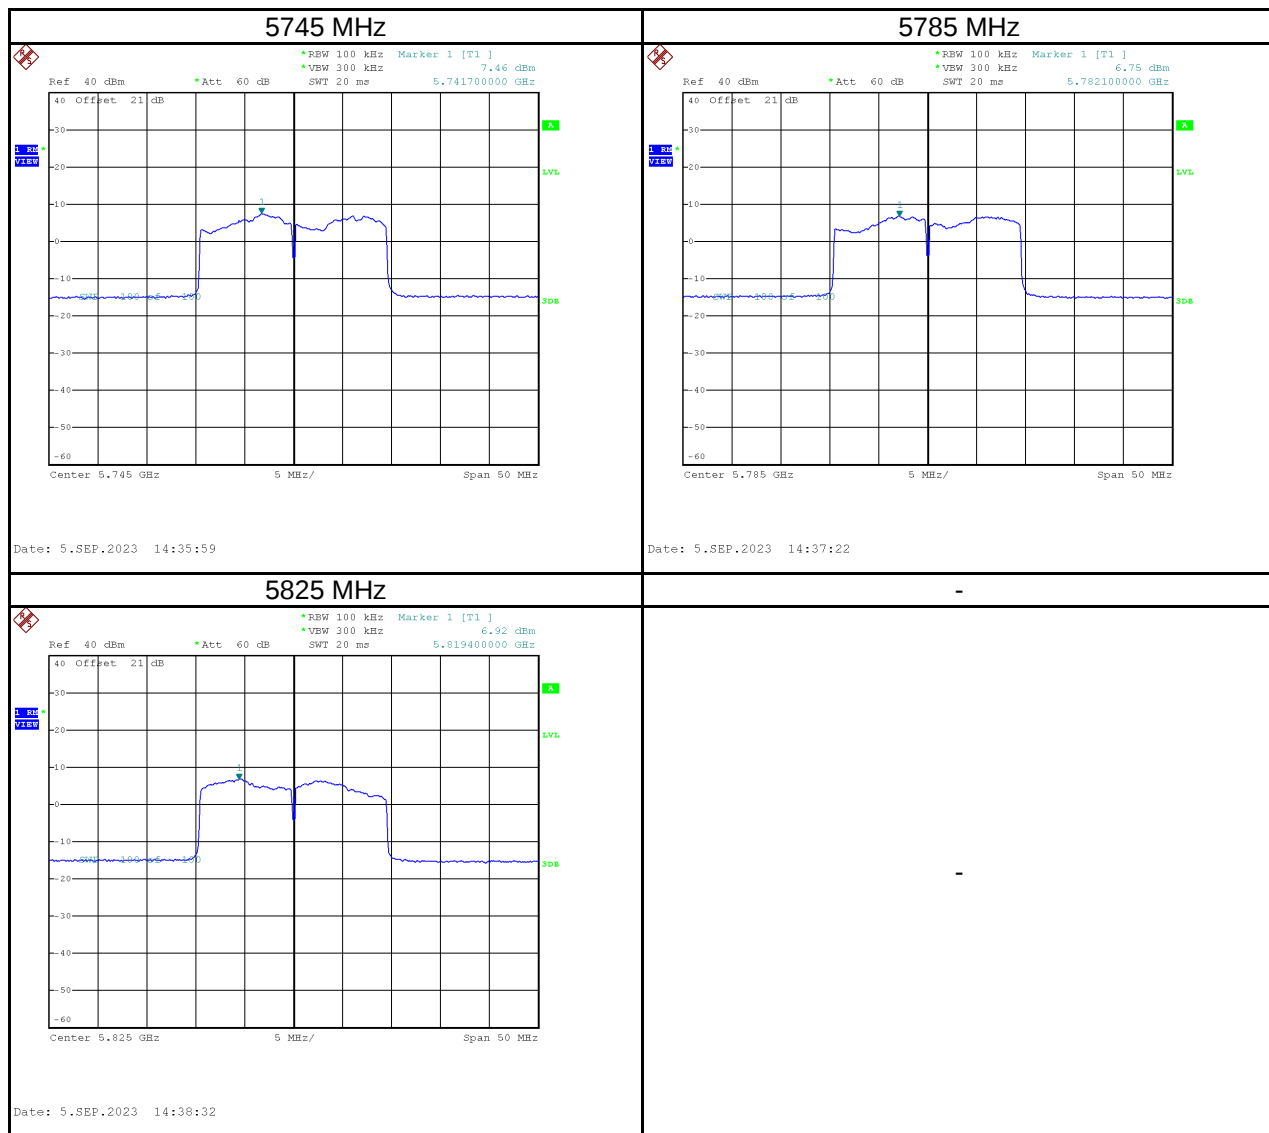


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.2 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | -2.68                   | 0.00             | -2.68                              | 14.98                   | Pass   |
| 5200                 | -2.85                   | 0.00             | -2.85                              | 14.98                   | Pass   |
| 5240                 | -3.31                   | 0.00             | -3.31                              | 14.98                   | Pass   |

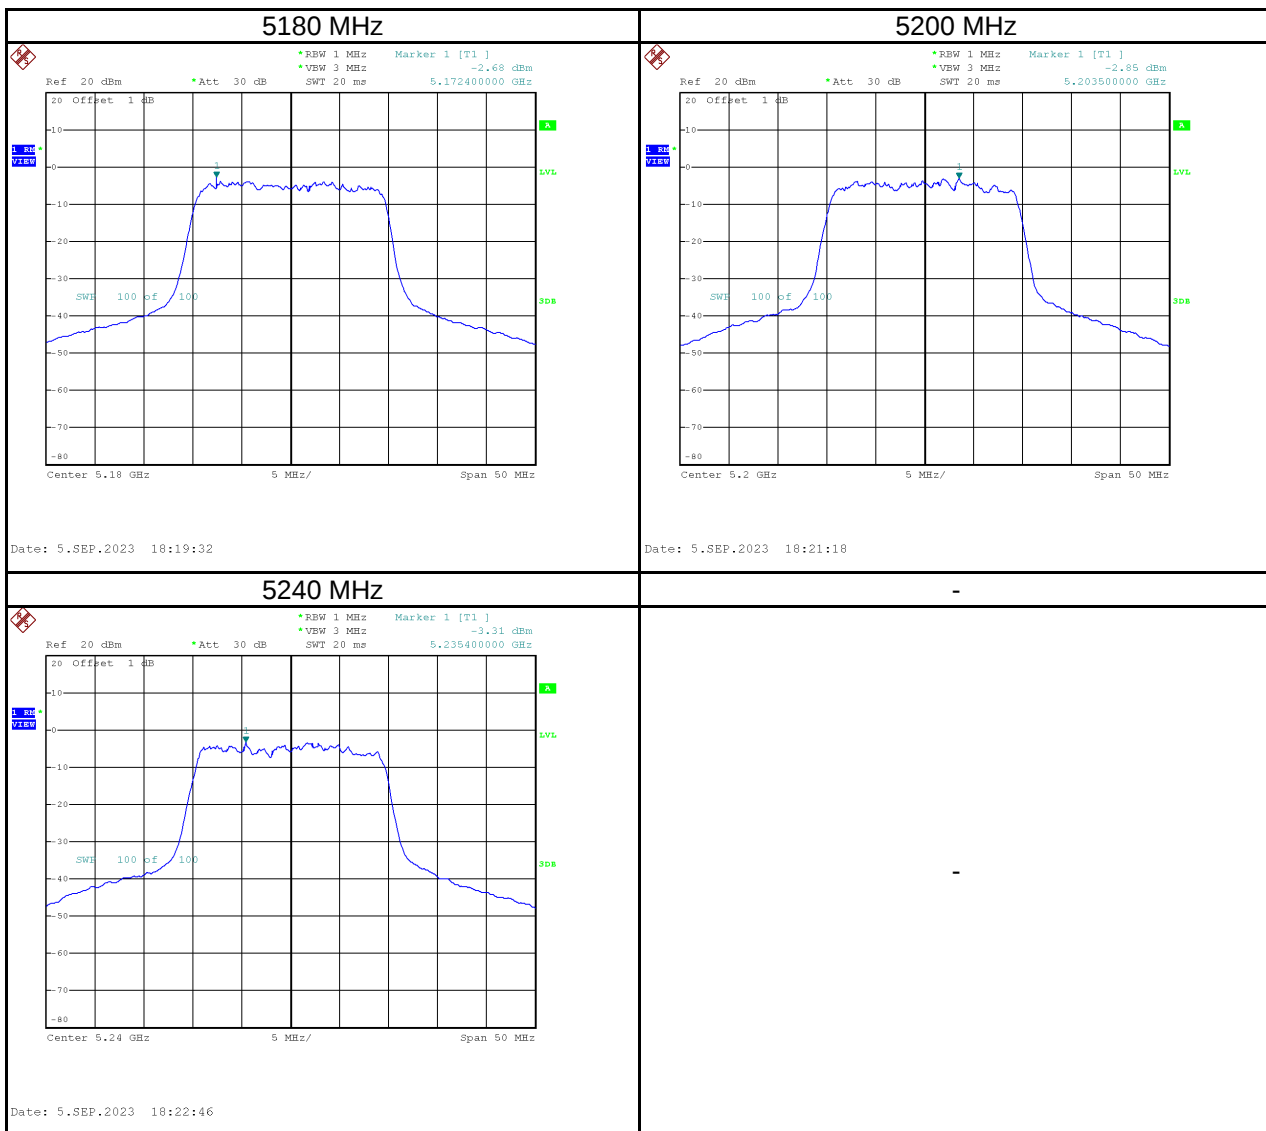


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | -4.73                       | 2.26                        | 0.00             | 2.26                                   | 27.98                       | Pass   |
| 5785                 | -5.26                       | 1.73                        | 0.00             | 1.73                                   | 27.98                       | Pass   |
| 5825                 | -5.62                       | 1.37                        | 0.00             | 1.37                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

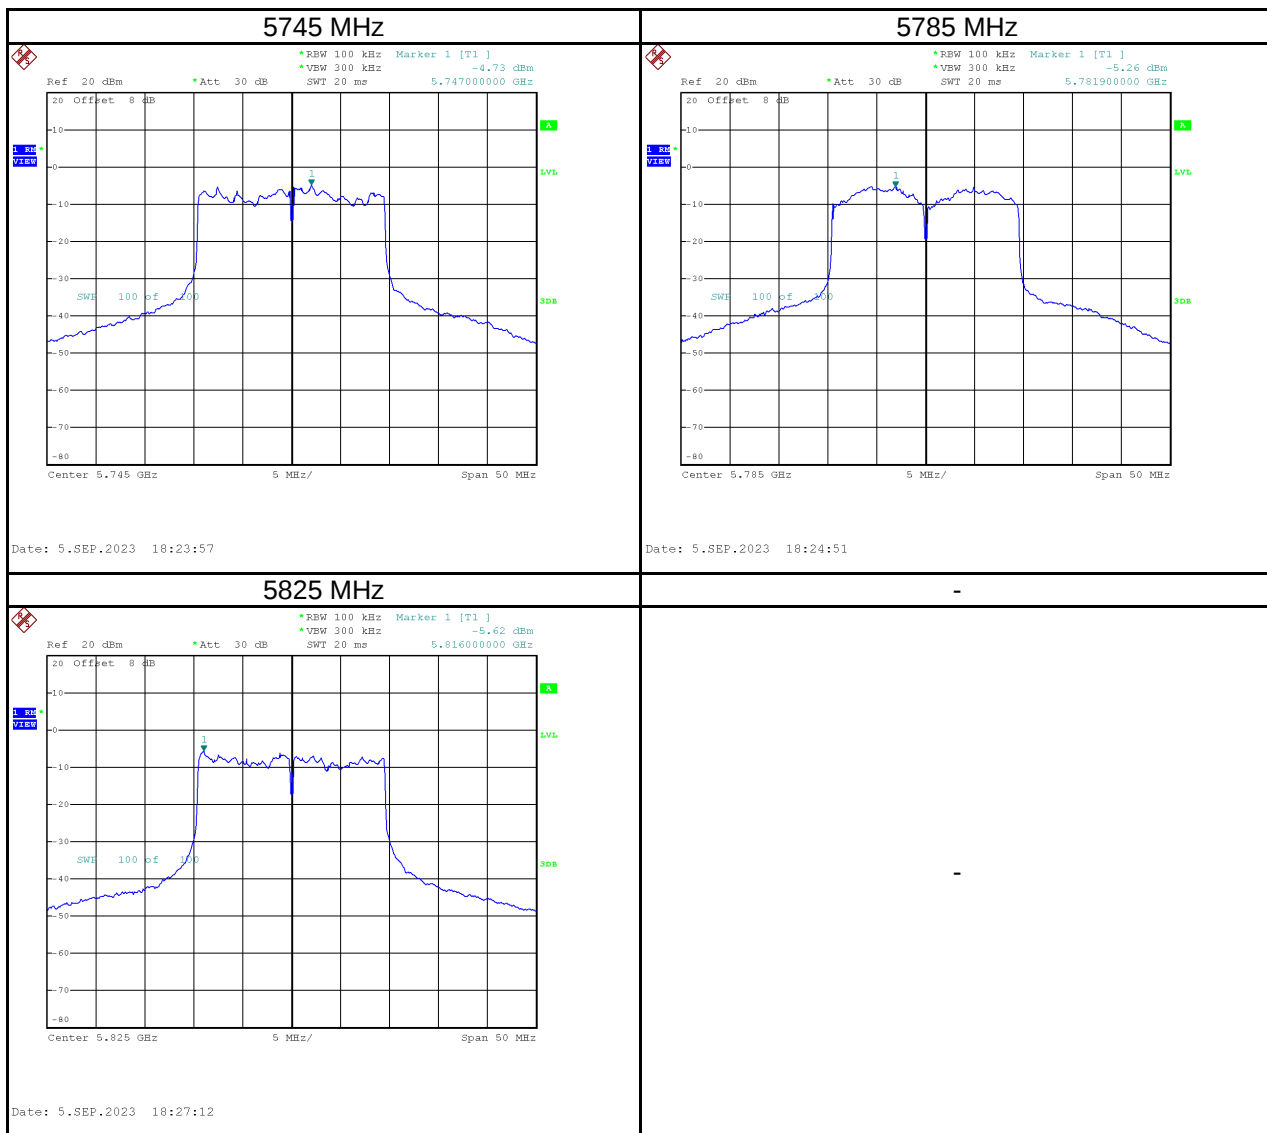


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.3 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 10.29                   | 0.00             | 10.29                              | 14.98                   | Pass   |
| 5200                 | 10.18                   | 0.00             | 10.18                              | 14.98                   | Pass   |
| 5240                 | 9.96                    | 0.00             | 9.96                               | 14.98                   | Pass   |

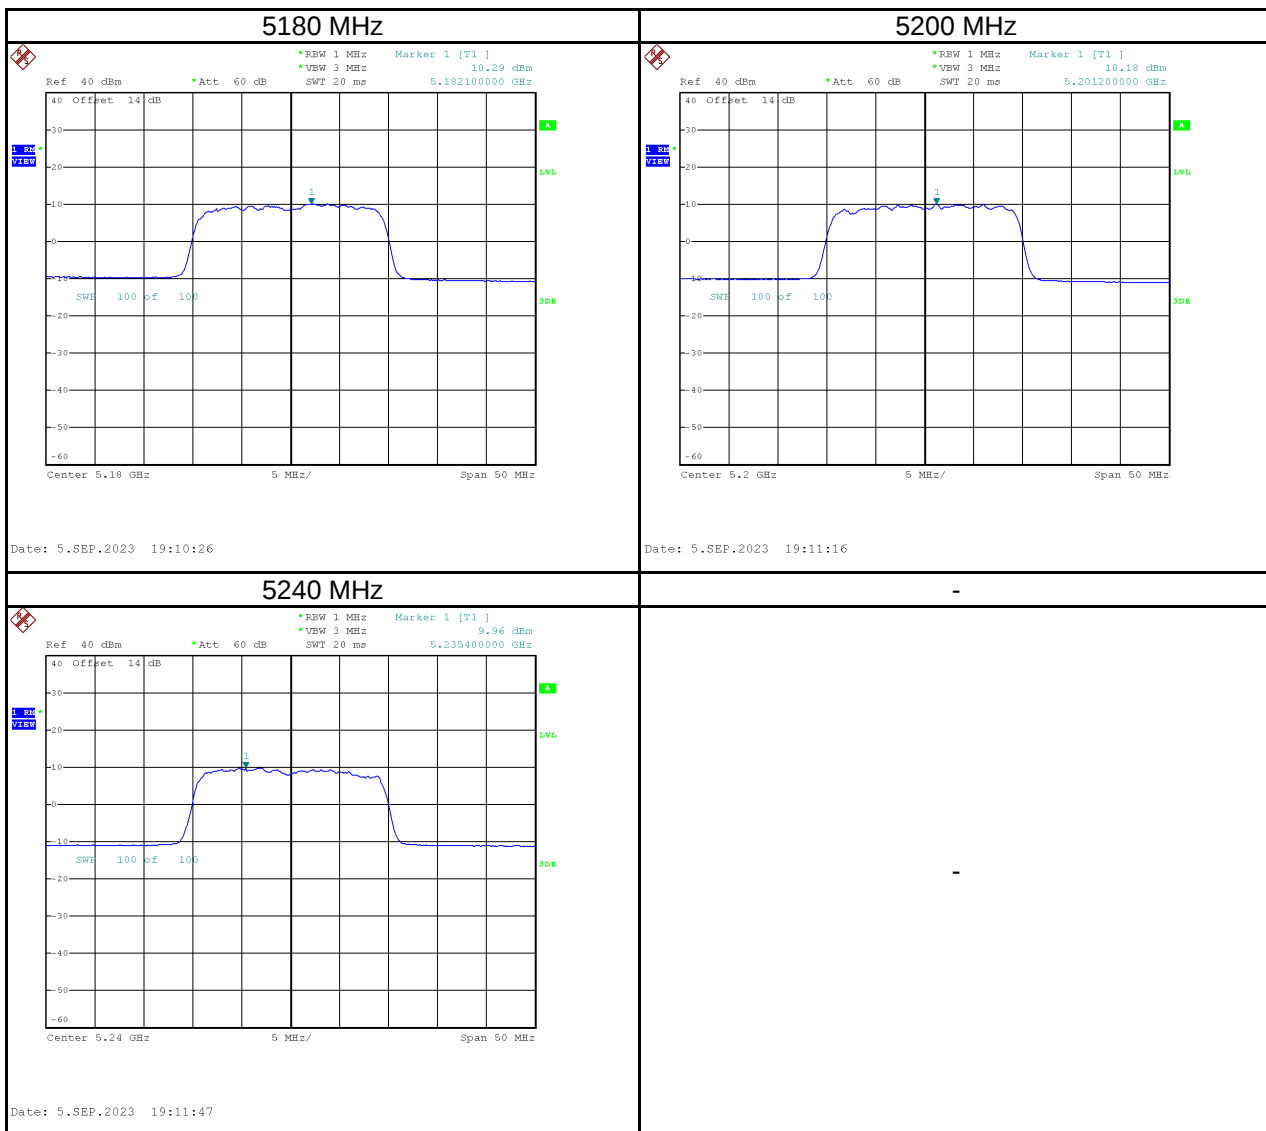


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | 8.11                        | 15.10                       | 0.00             | 15.10                                  | 27.98                       | Pass   |
| 5785                 | 5.62                        | 12.61                       | 0.00             | 12.61                                  | 27.98                       | Pass   |
| 5825                 | 6.68                        | 13.67                       | 0.00             | 13.67                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

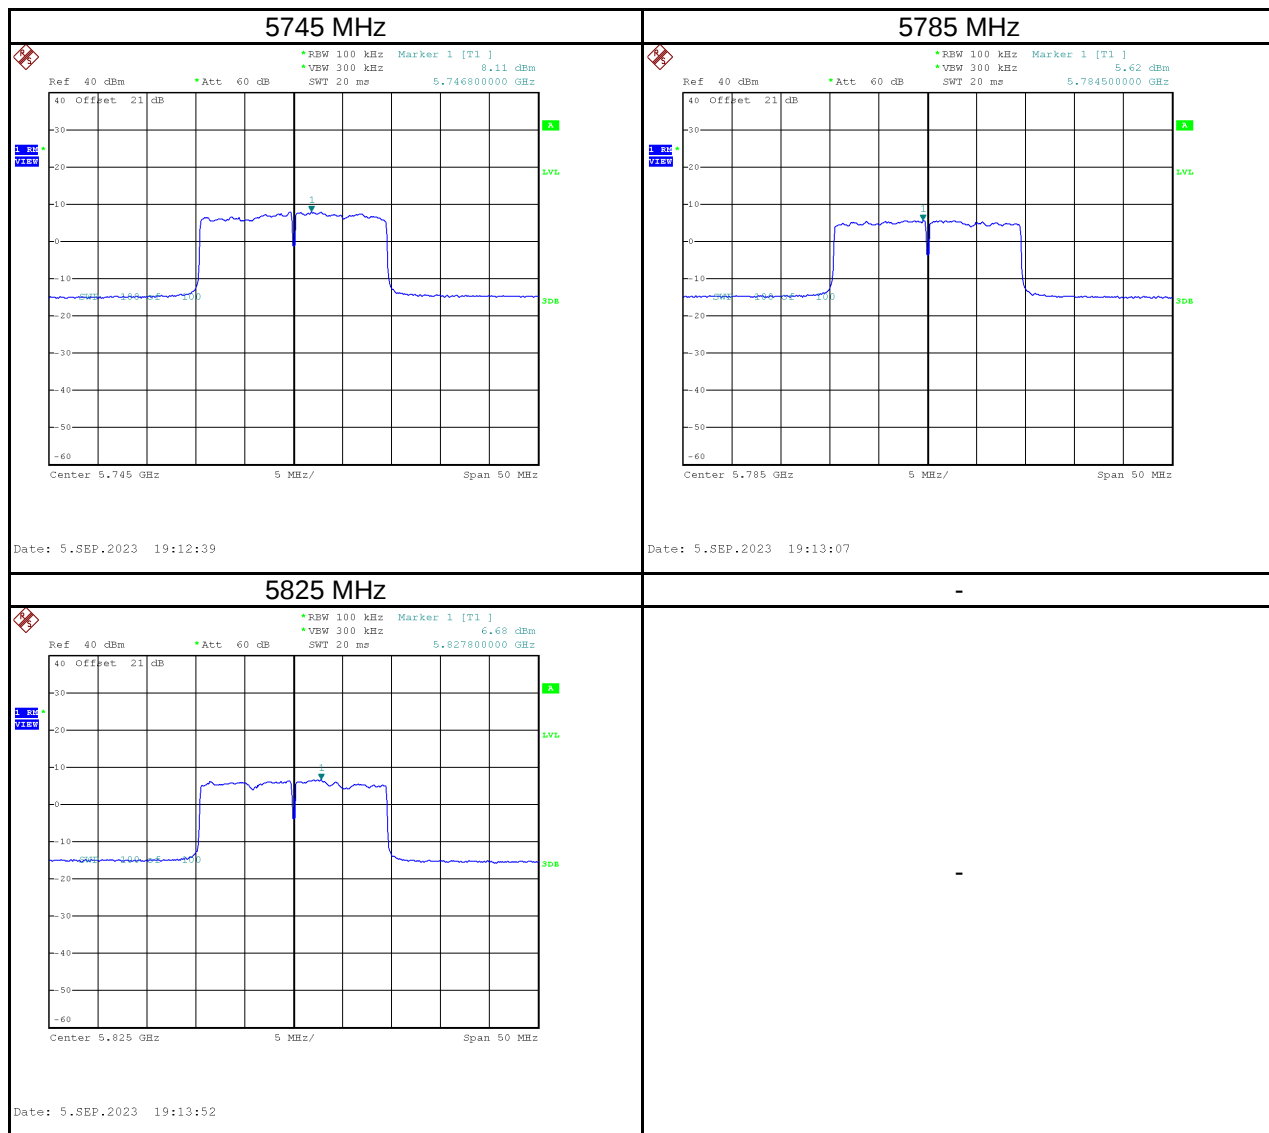


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Ant.4 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5180                 | 11.40                   | 0.00             | 11.40                              | 14.98                   | Pass   |
| 5200                 | 11.00                   | 0.00             | 11.00                              | 14.98                   | Pass   |
| 5240                 | 10.83                   | 0.00             | 10.83                              | 14.98                   | Pass   |

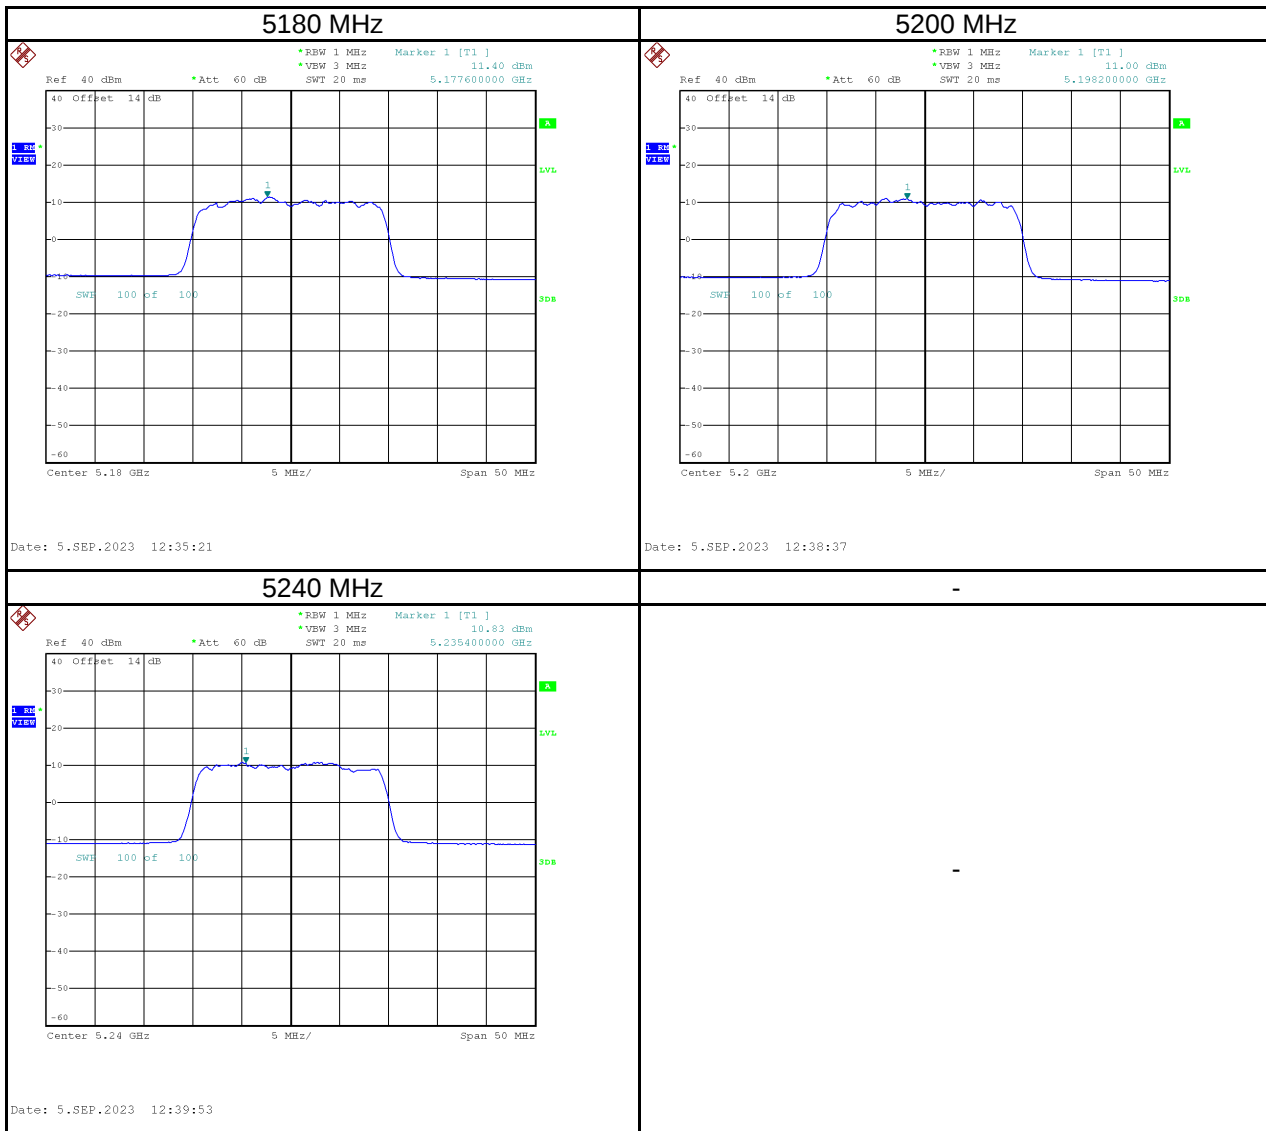

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5745                 | 7.06                        | 14.05                       | 0.00             | 14.05                                  | 27.98                       | Pass   |
| 5785                 | 7.26                        | 14.25                       | 0.00             | 14.25                                  | 27.98                       | Pass   |
| 5825                 | 7.28                        | 14.27                       | 0.00             | 14.27                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$

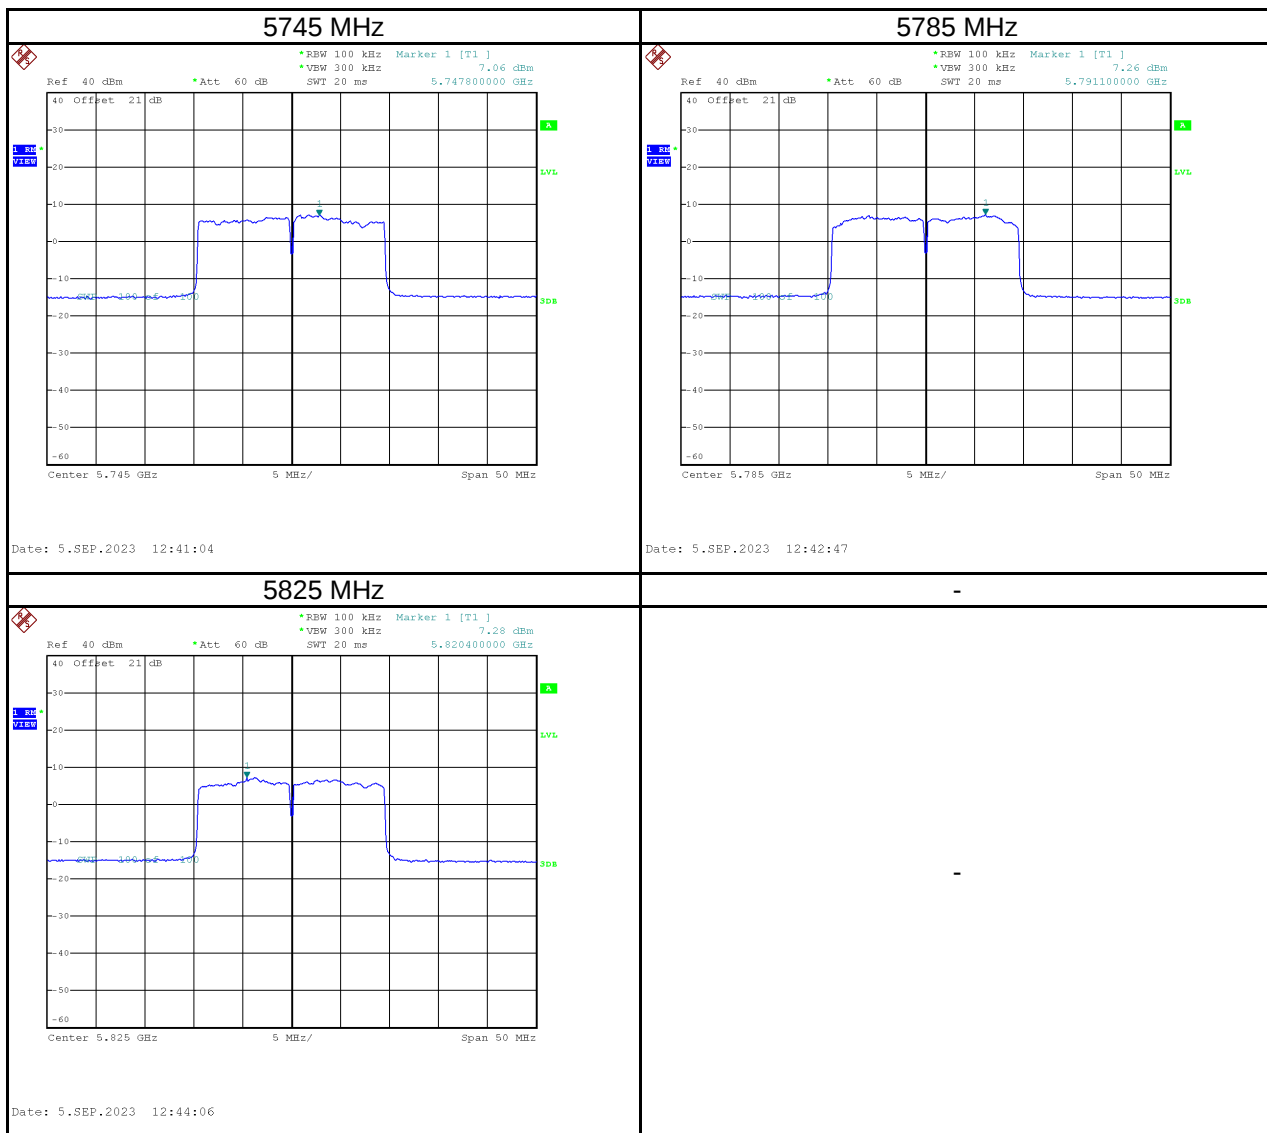


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE20)_Total |
|-----------|----------------------------|


| Frequency (MHz) | Power Spectral Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|-----------------|----------------------------------|----------------------|--------|
| 5180            | 15.76                            | 14.98                | Pass   |
| 5200            | 15.41                            | 14.98                | Pass   |
| 5240            | 15.19                            | 14.98                | Pass   |
| 5745            | 19.41                            | 27.98                | Pass   |
| 5785            | 18.45                            | 27.98                | Pass   |
| 5825            | 18.81                            | 27.98                | Pass   |

Test Mode IEEE 802.11ax (HE40)\_Ant.1

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 8.51                    | 0.00             | 8.51                               | 14.98                   | Pass   |
| 5230                 | 8.16                    | 0.00             | 8.16                               | 14.98                   | Pass   |

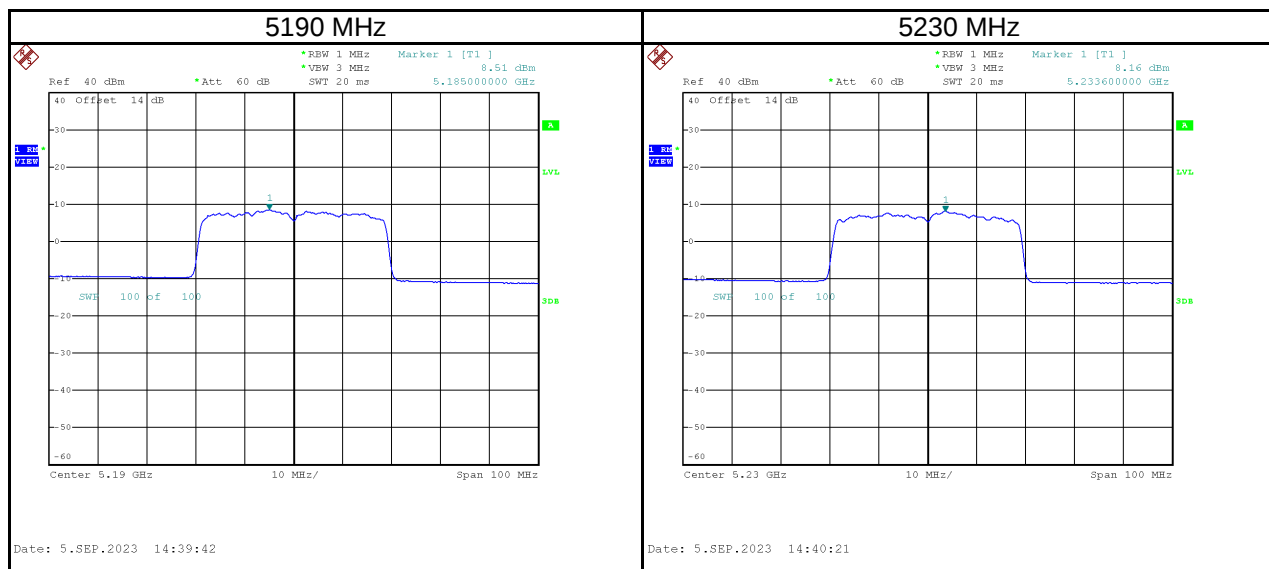


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | 4.84                        | 11.83                       | 0.00             | 11.83                                  | 27.98                       | Pass   |
| 5795                 | 4.36                        | 11.35                       | 0.00             | 11.35                                  | 27.98                       | Pass   |

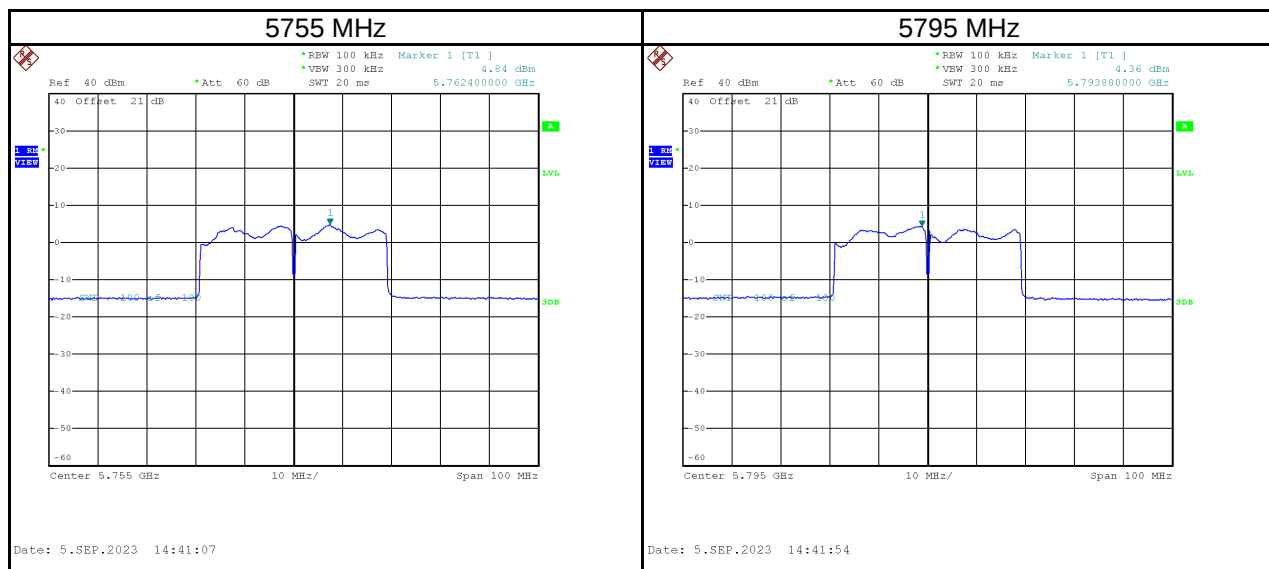
NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$ 


Test Mode IEEE 802.11ax (HE40)\_Ant.2

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | -5.84                   | 0.00             | -5.84                              | 14.98                   | Pass   |
| 5230                 | -5.59                   | 0.00             | -5.59                              | 14.98                   | Pass   |

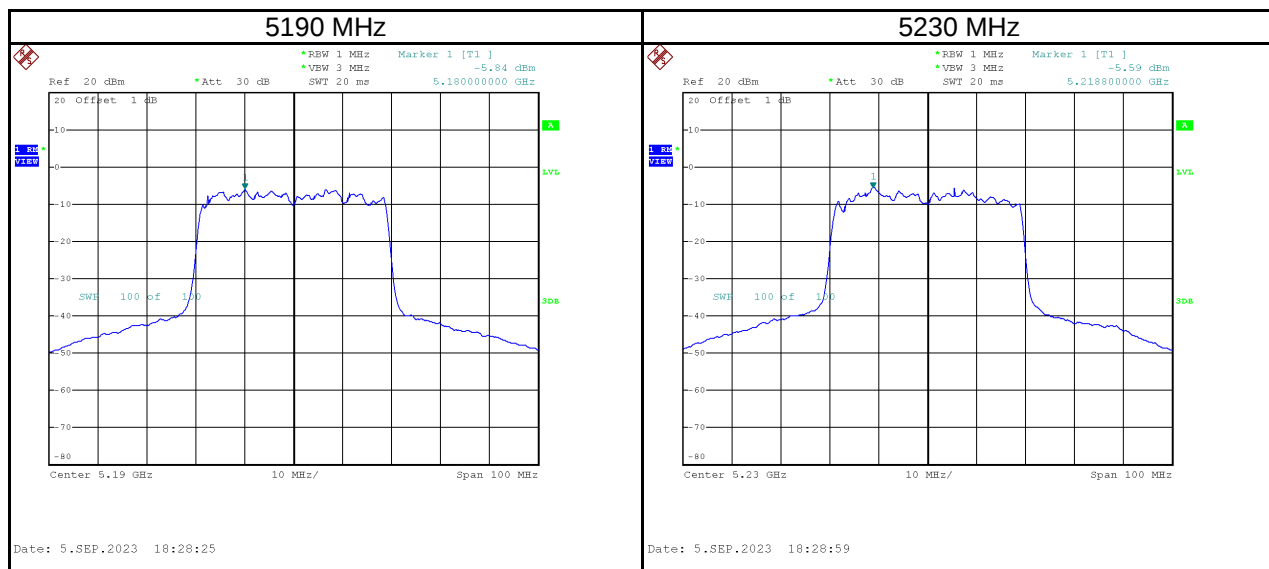


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | -7.66                       | -0.67                       | 0.00             | -0.67                                  | 27.98                       | Pass   |
| 5795                 | -7.47                       | -0.48                       | 0.00             | -0.48                                  | 27.98                       | Pass   |

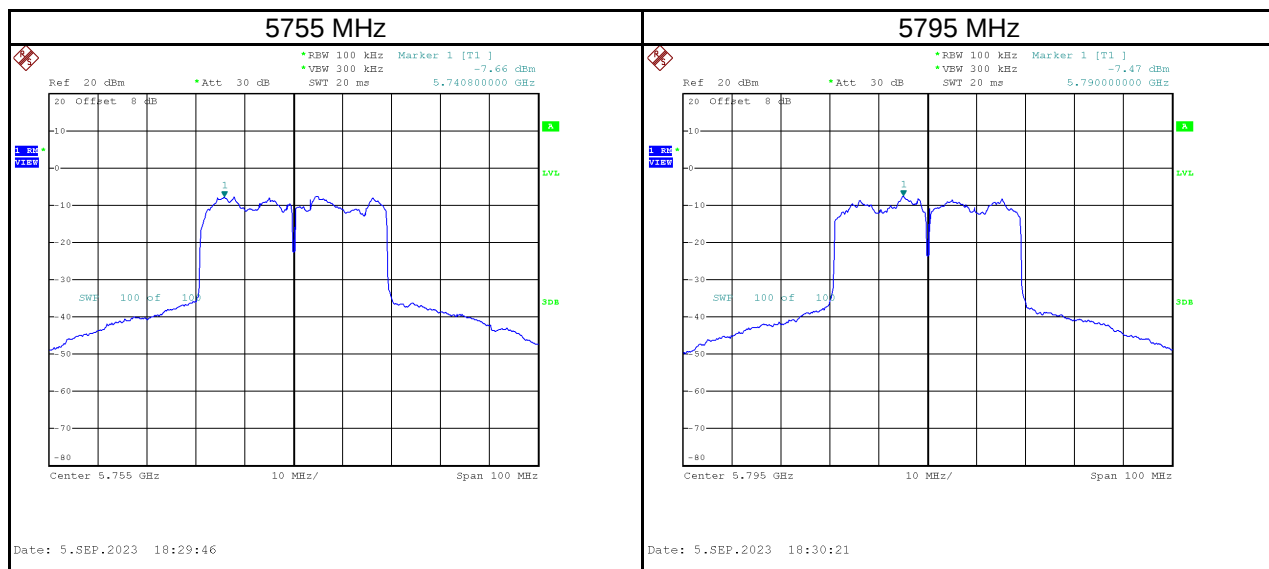
NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ KHz} / 100\text{ kHz})$ 


Test Mode IEEE 802.11ax (HE40)\_Ant.3

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 7.65                    | 0.00             | 7.65                               | 14.98                   | Pass   |
| 5230                 | 7.99                    | 0.00             | 7.99                               | 14.98                   | Pass   |

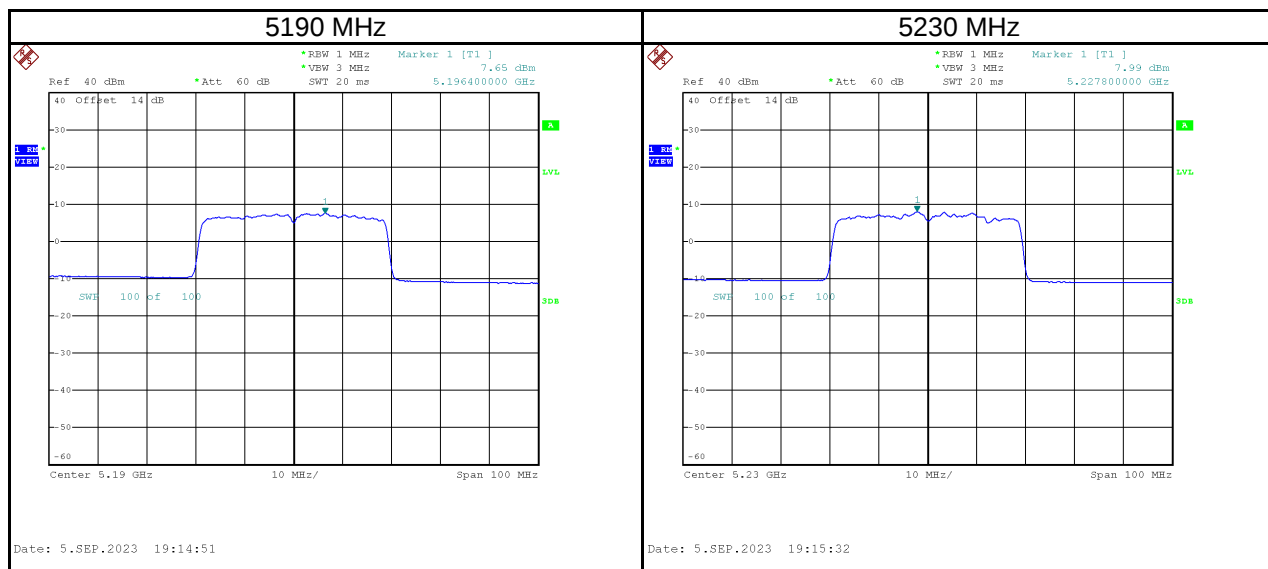


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | 5.75                        | 12.74                       | 0.00             | 12.74                                  | 27.98                       | Pass   |
| 5795                 | 5.01                        | 12.00                       | 0.00             | 12.00                                  | 27.98                       | Pass   |

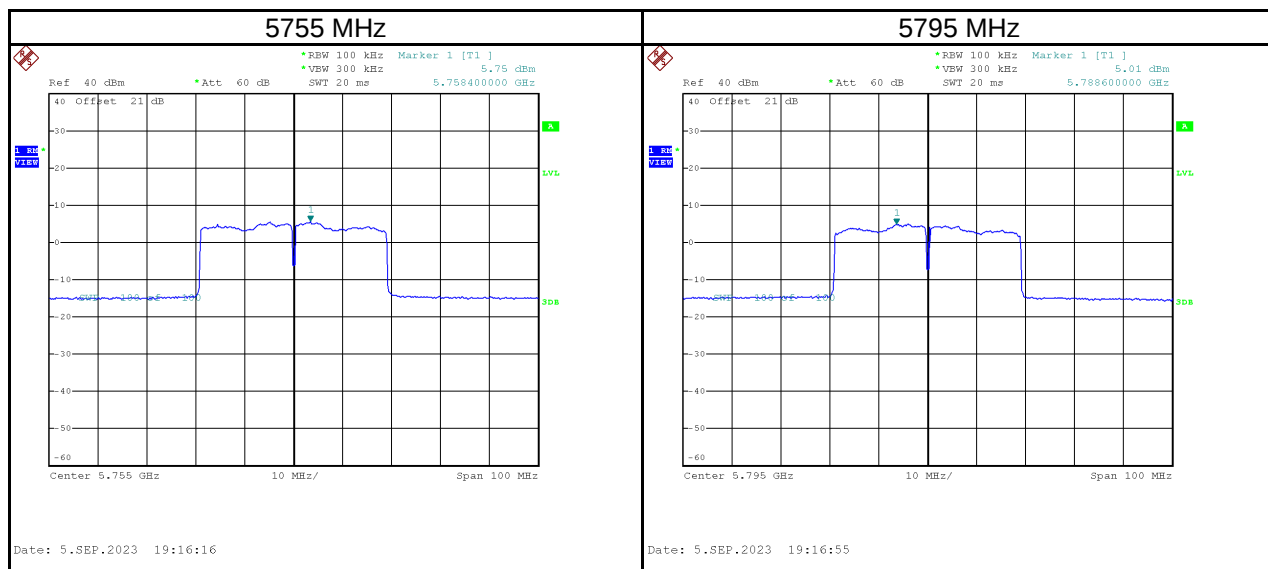
NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$ 


Test Mode IEEE 802.11ax (HE40)\_Ant.4

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5190                 | 8.70                    | 0.00             | 8.70                               | 14.98                   | Pass   |
| 5230                 | 8.76                    | 0.00             | 8.76                               | 14.98                   | Pass   |

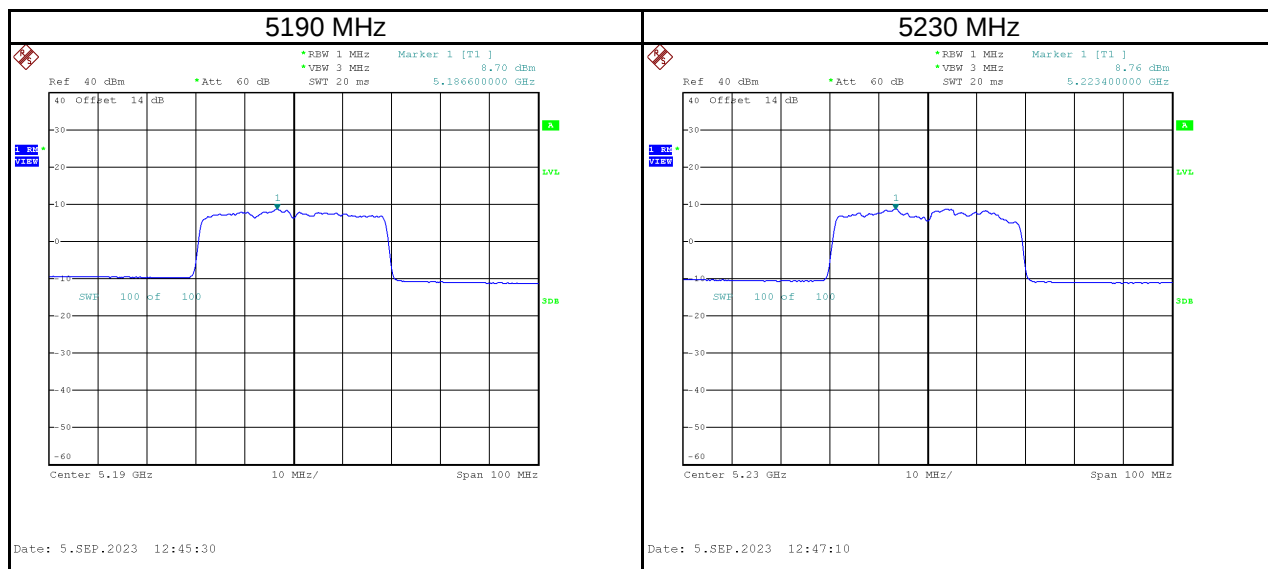

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5755                 | 4.53                        | 11.52                       | 0.00             | 11.52                                  | 27.98                       | Pass   |
| 5795                 | 4.41                        | 11.40                       | 0.00             | 11.40                                  | 27.98                       | Pass   |

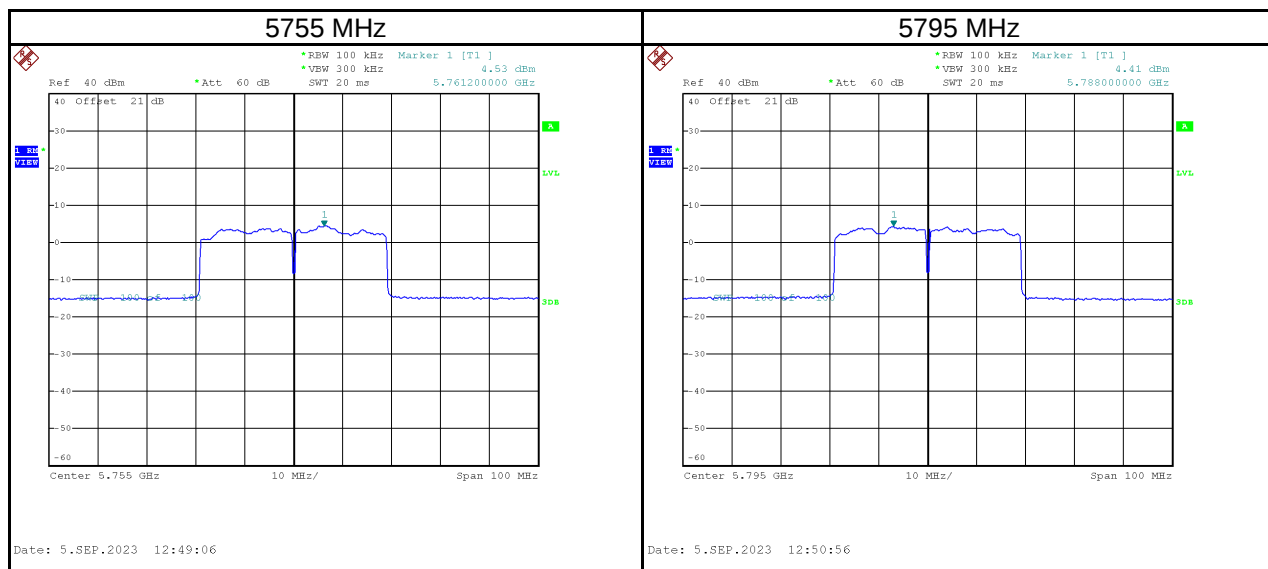
NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$ 


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE40)_Total |
|-----------|----------------------------|

| Frequency (MHz) | Power Spectral Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|-----------------|----------------------------------|----------------------|--------|
| 5190            | 13.14                            | 14.98                | Pass   |
| 5230            | 13.15                            | 14.98                | Pass   |
| 5755            | 16.91                            | 27.98                | Pass   |
| 5795            | 16.45                            | 27.98                | Pass   |


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.1 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | 5.68                    | 0.00             | 5.68                               | 14.98                   | Pass   |

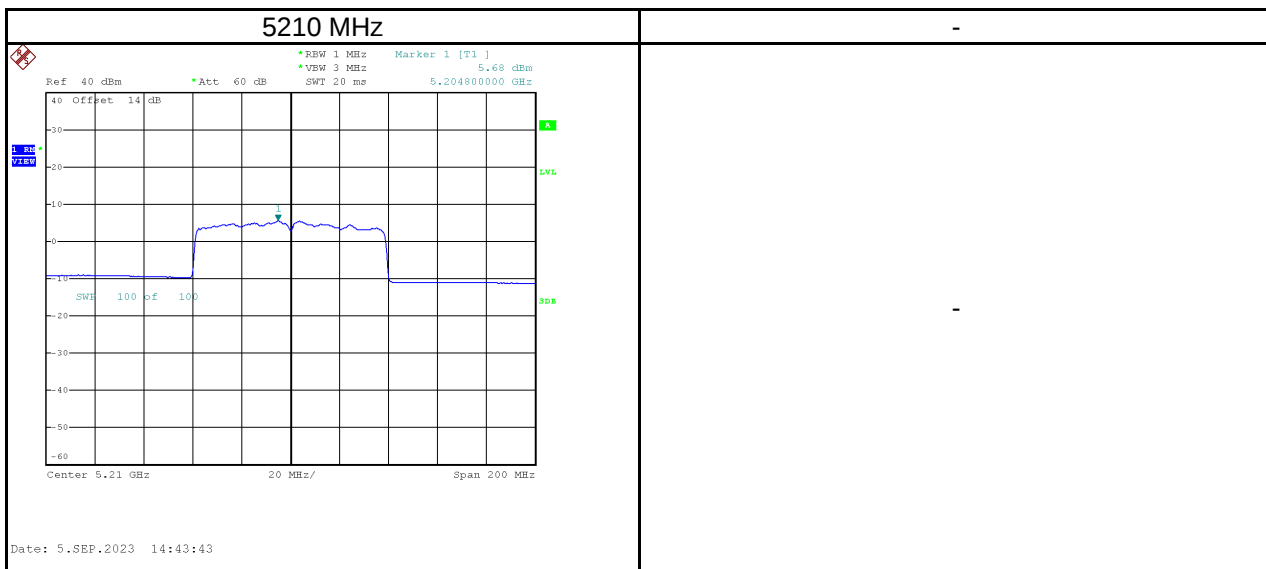


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | 1.59                        | 8.58                        | 0.00             | 8.58                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

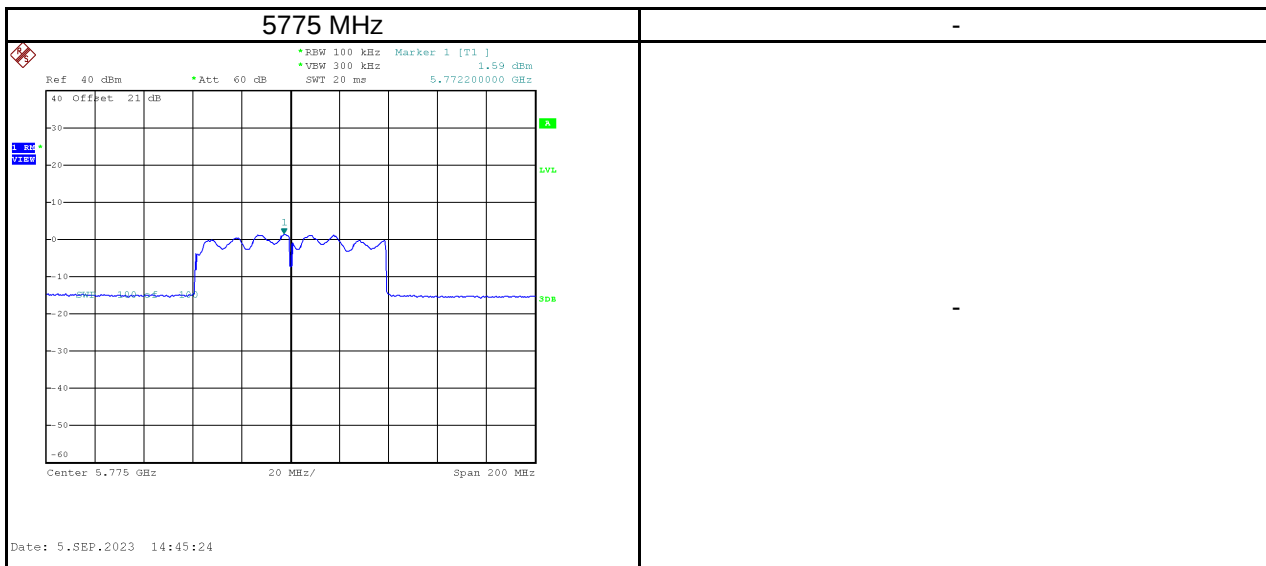


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.2 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | -8.83                   | 0.00             | -8.83                              | 14.98                   | Pass   |

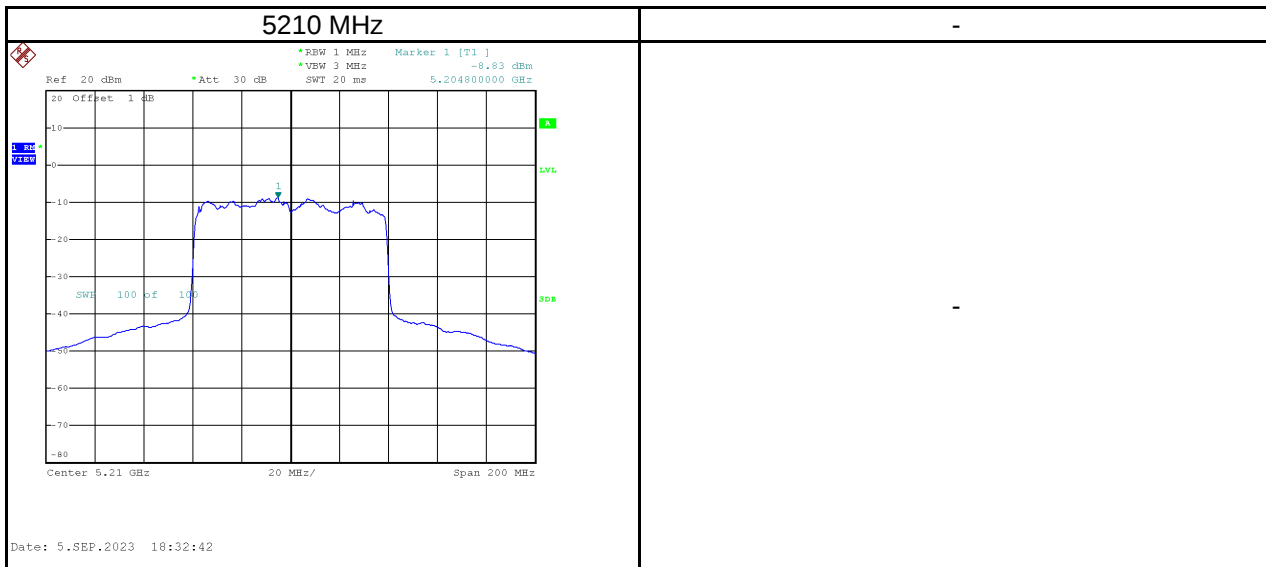


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | -10.61                      | -3.62                       | 0.00             | -3.62                                  | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

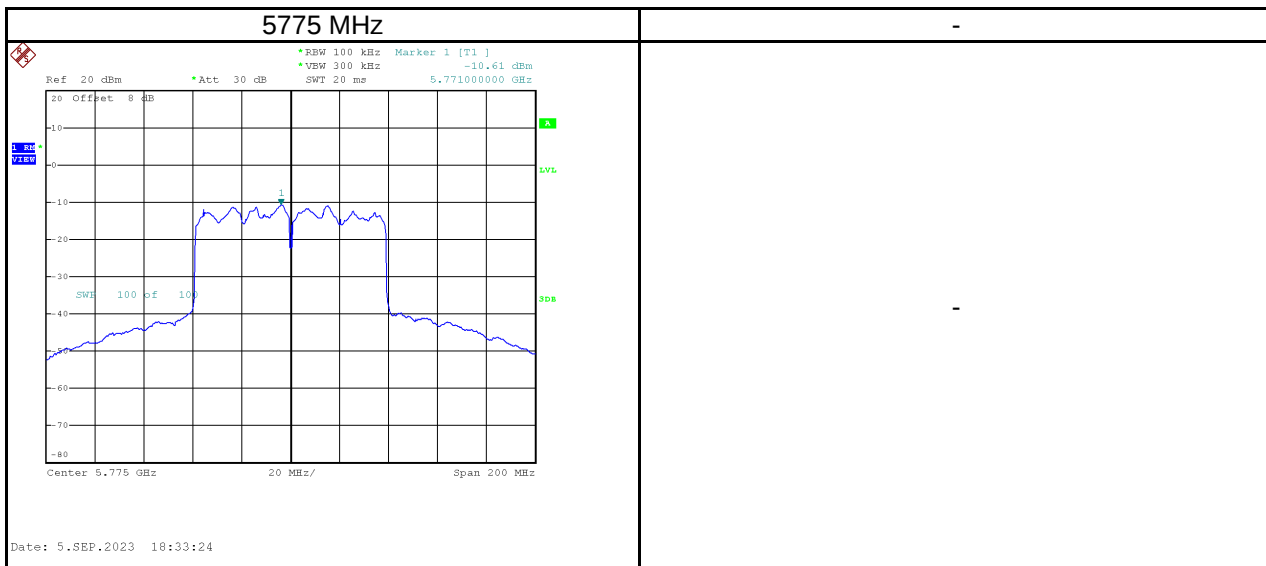


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.3 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | 4.88                    | 0.00             | 4.88                               | 14.98                   | Pass   |

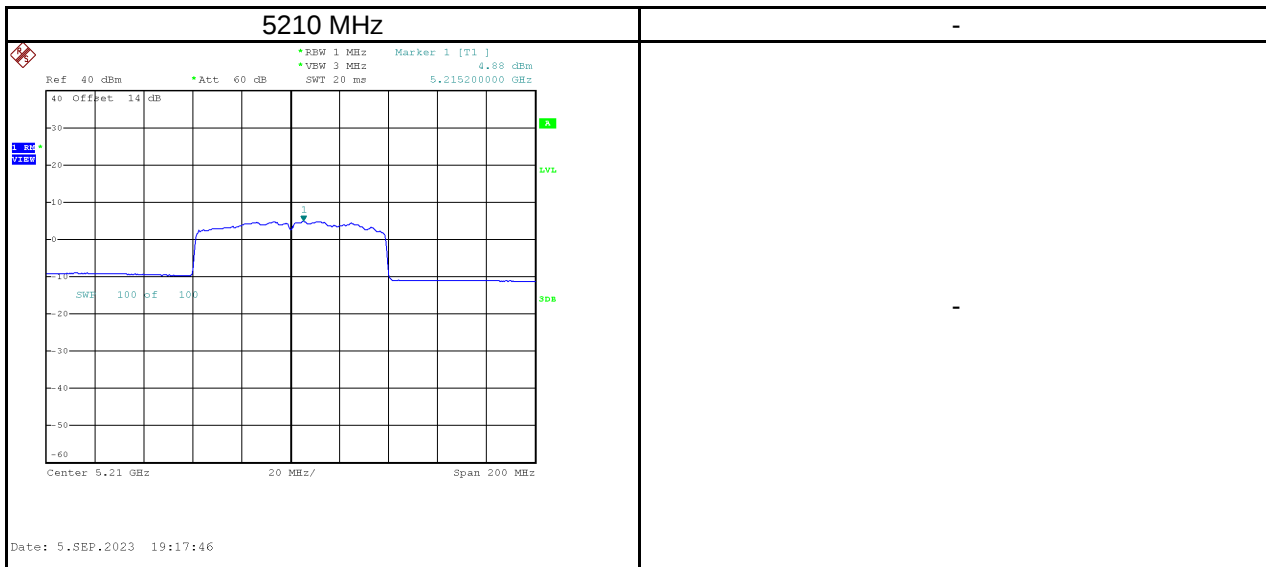


| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | 2.46                        | 9.45                        | 0.00             | 9.45                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

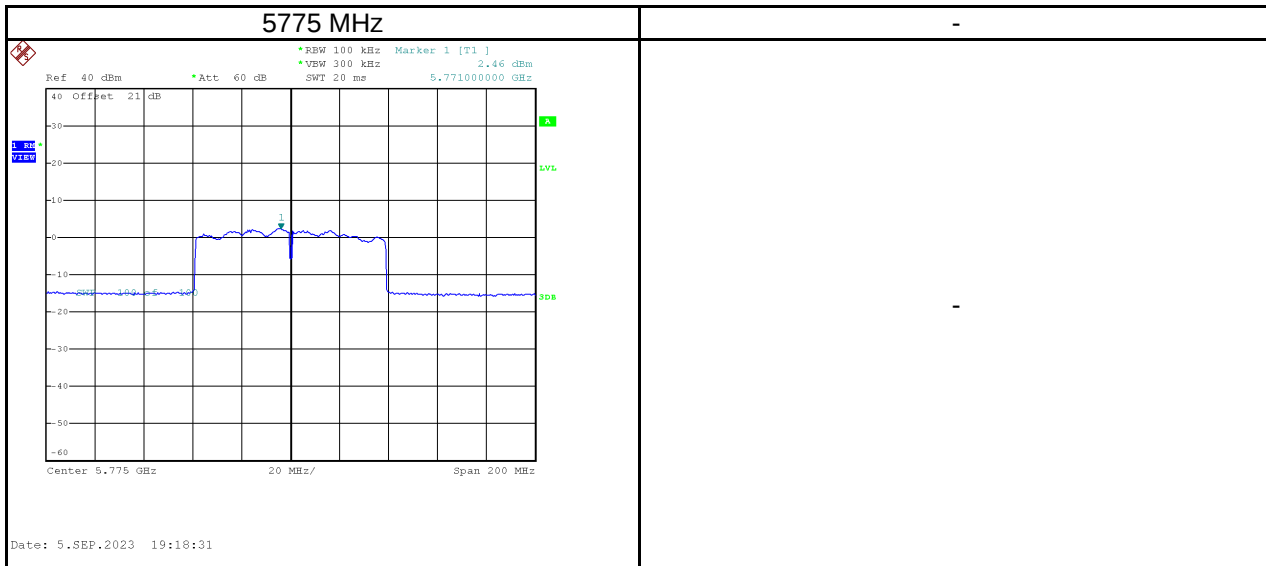


|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Ant.4 |
|-----------|----------------------------|

| Test Frequency (MHz) | Power Density (dBm/MHz) | Duty Factor (dB) | Calculated Power Density (dBm/MHz) | Maximum Limit (dBm/MHz) | Result |
|----------------------|-------------------------|------------------|------------------------------------|-------------------------|--------|
| 5210                 | 5.42                    | 0.00             | 5.42                               | 14.98                   | Pass   |

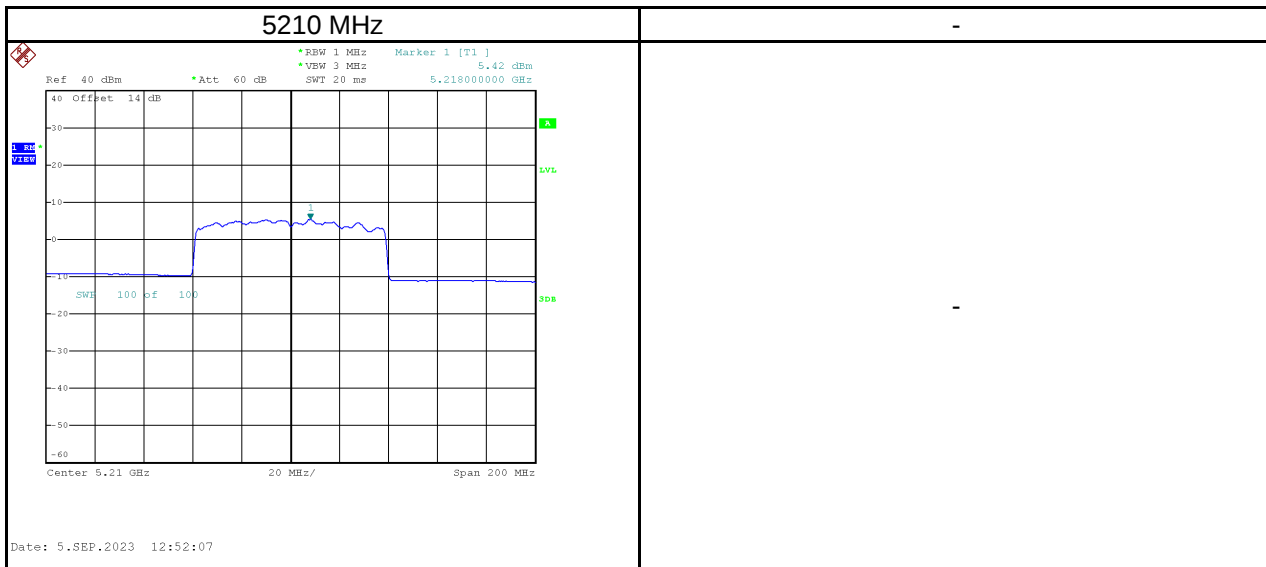

| Test Frequency (MHz) | Power Density (dBm/100 kHz) | Power Density (dBm/500 kHz) | Duty Factor (dB) | Calculated Power Density (dBm/500 kHz) | Maximum Limit (dBm/500 kHz) | Result |
|----------------------|-----------------------------|-----------------------------|------------------|----------------------------------------|-----------------------------|--------|
| 5775                 | 1.52                        | 8.51                        | 0.00             | 8.51                                   | 27.98                       | Pass   |

NOTE:  $PSD_{dBm/500\text{ kHz}} = PSD_{dBm/100\text{ kHz}} + 10 \times \log_{10}(500\text{ kHz} / 100\text{ kHz})$

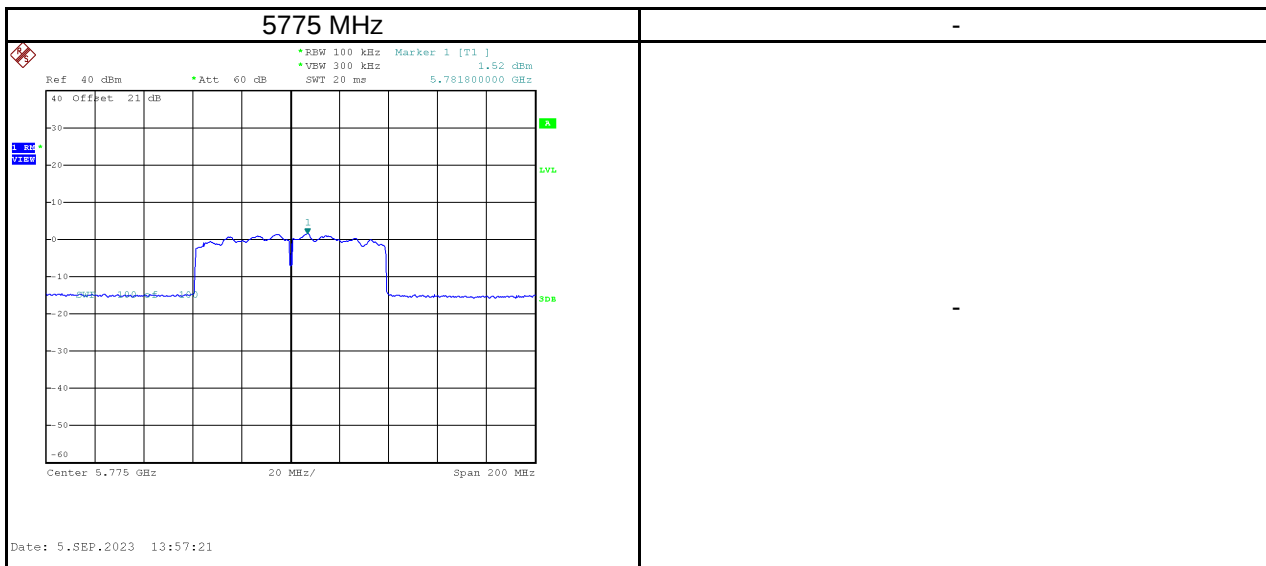

|           |                            |
|-----------|----------------------------|
| Test Mode | IEEE 802.11ax (HE80)_Total |
|-----------|----------------------------|

| Frequency (MHz) | Power Spectral Density (dBm/MHz) | Max. Limit (dBm/MHz) | Result |
|-----------------|----------------------------------|----------------------|--------|
| 5210            | 11.96                            | 14.98                | Pass   |
| 5775            | 13.72                            | 27.98                | Pass   |

**End of Test Report**