



Appendix D

RF Test Data for 5.2G WIFI (Conducted Measurement)

Product Name: TABLET

Test Model: TBA

Environmental Conditions

Temperature:	25° C
Relative Humidity:	50%
ATM Pressure:	100.0 kPa
Test Engineer:	Ling Zhu
Supervised by:	Li Huan



D.1 26dB Bandwidth


Test Result

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	18.560	5170.800	5189.360	---	PASS
		5200	18.400	5190.840	5209.240	---	PASS
		5240	18.560	5230.800	5249.360	---	PASS
11N20SISO	Ant1	5180	19.480	5170.200	5189.680	---	PASS
		5200	19.400	5190.240	5209.640	---	PASS
		5240	19.400	5230.320	5249.720	---	PASS
11N40SISO	Ant1	5190	40.800	5169.360	5210.160	---	PASS
		5230	40.960	5209.440	5250.400	---	PASS
11AC20SISO	Ant1	5180	19.440	5170.280	5189.720	---	PASS
		5200	19.520	5190.240	5209.760	---	PASS
		5240	19.400	5230.320	5249.720	---	PASS
11AC40SISO	Ant1	5190	41.120	5169.360	5210.480	---	PASS
		5230	40.640	5209.600	5250.240	---	PASS
11AC80SISO	Ant1	5210	80.480	5170.000	5250.480	---	PASS




Test Graphs


11A_Ant1_5180

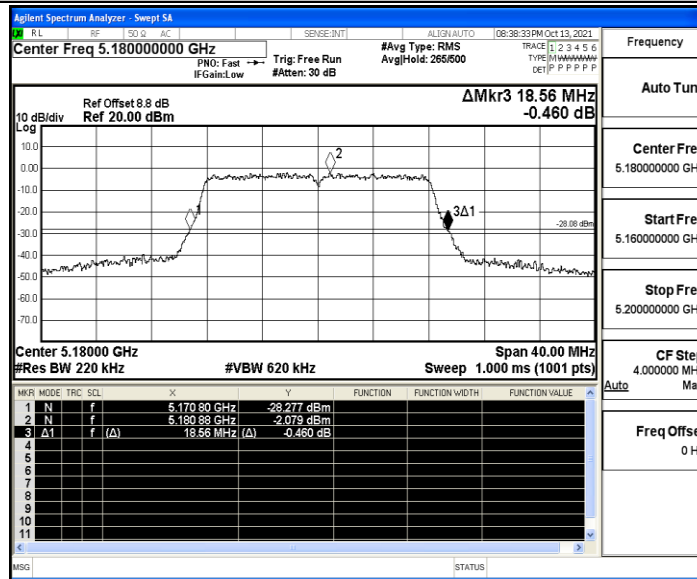


11A_Ant1_5200

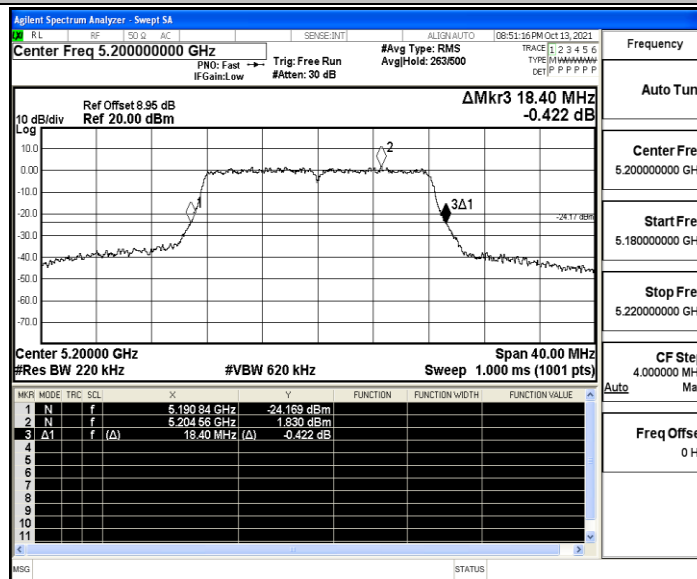


11A_Ant1_5240

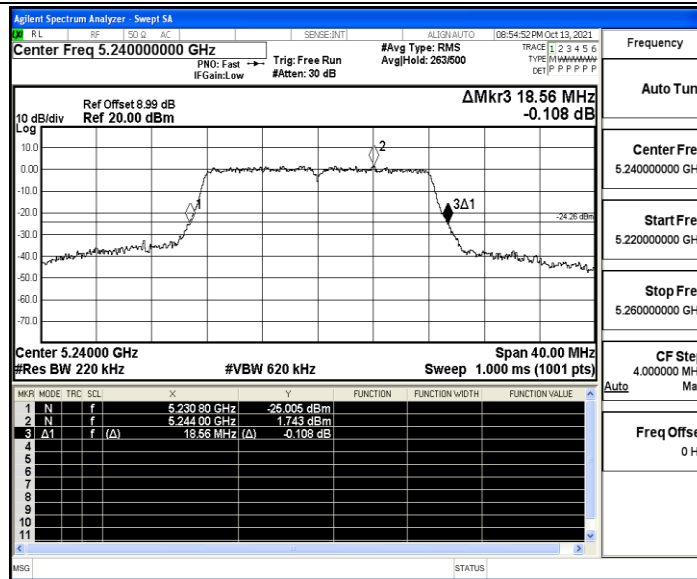

11N20SISO_Ant1_5180

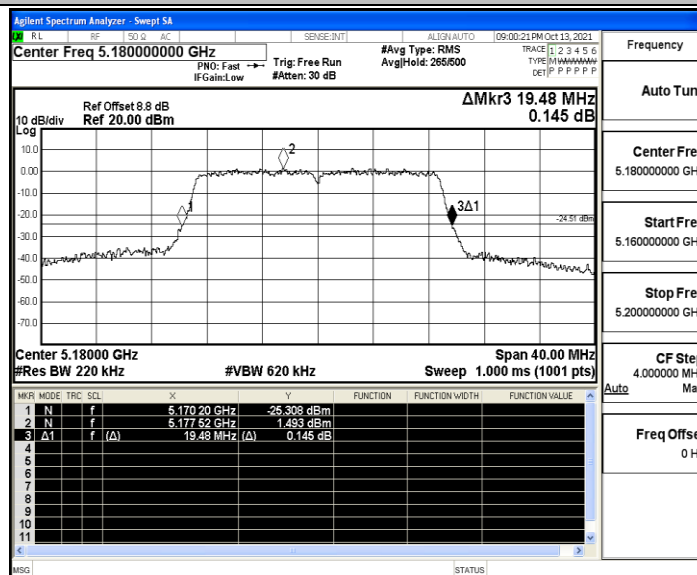


11N20SISO_Ant1_5200

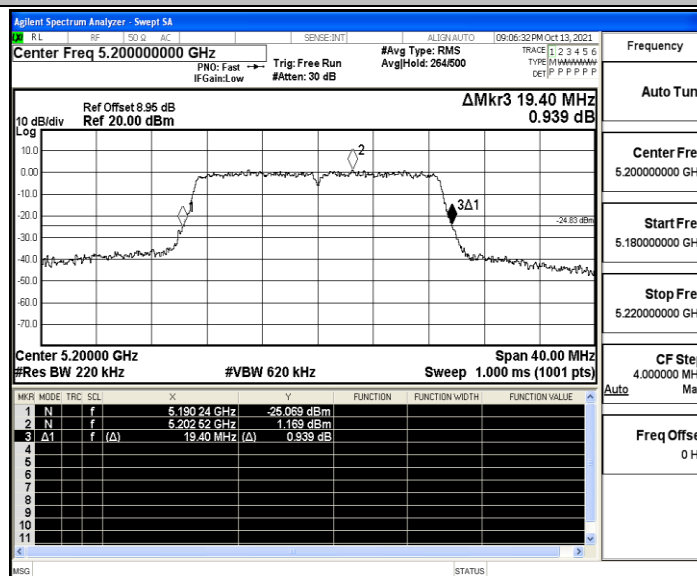





11N20SISO_Ant1_5240

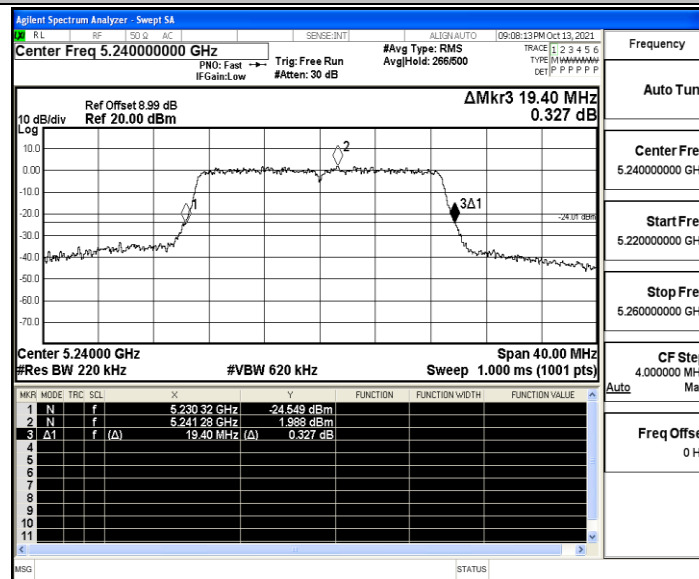


11N40SISO_Ant1_5190

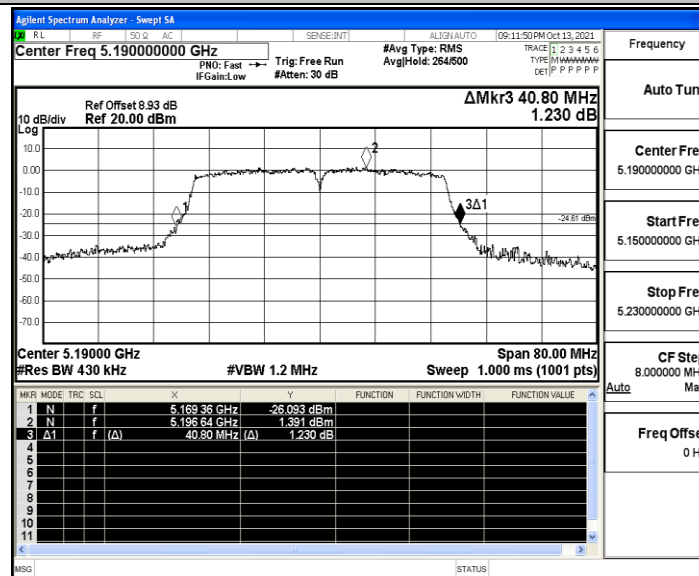


11N40SISO_Ant1_5230

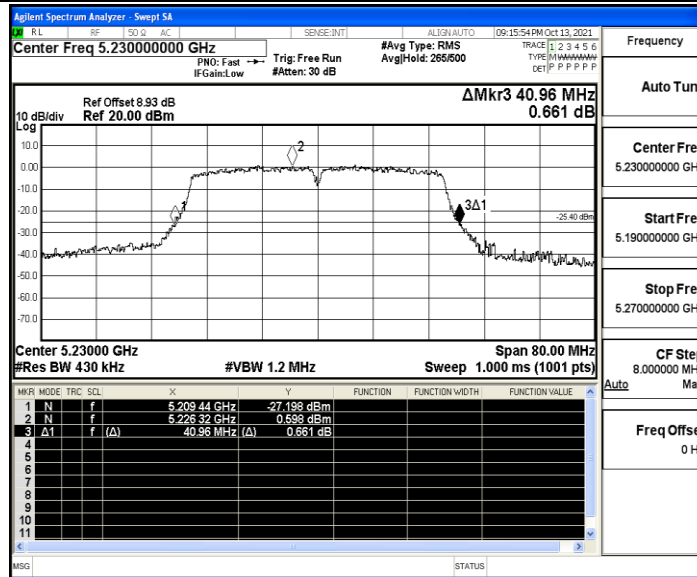

11AC20SISO_Ant1_5180

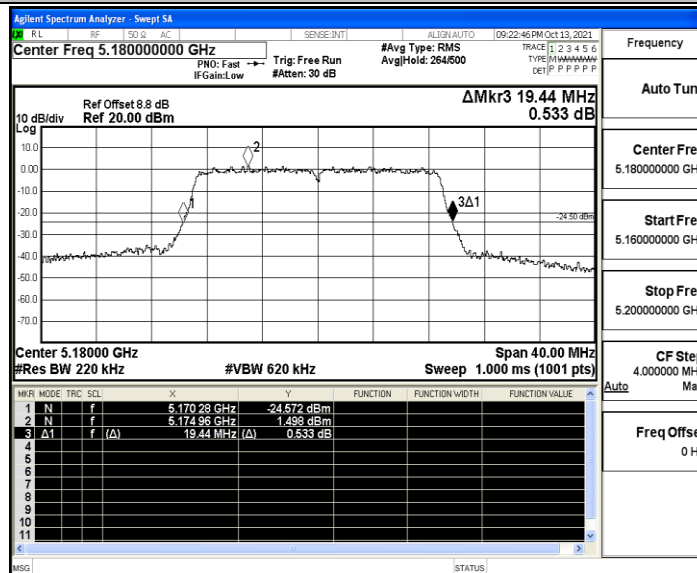


11AC20SISO_Ant1_5200

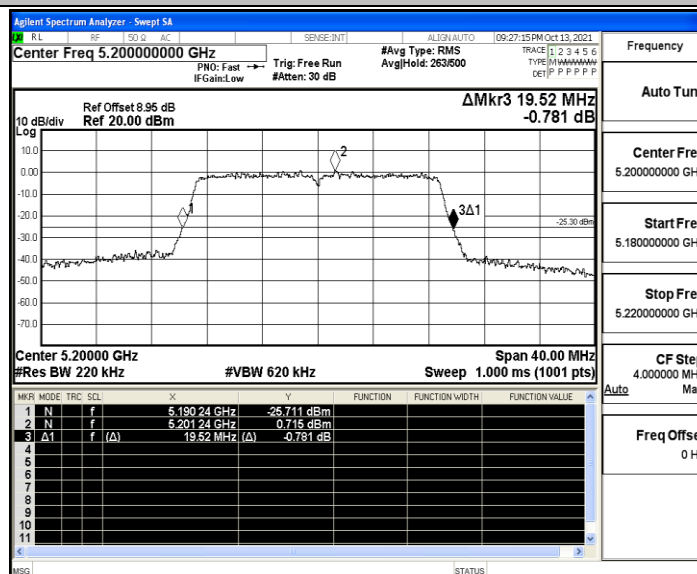





11AC20SISO_Ant1_5240

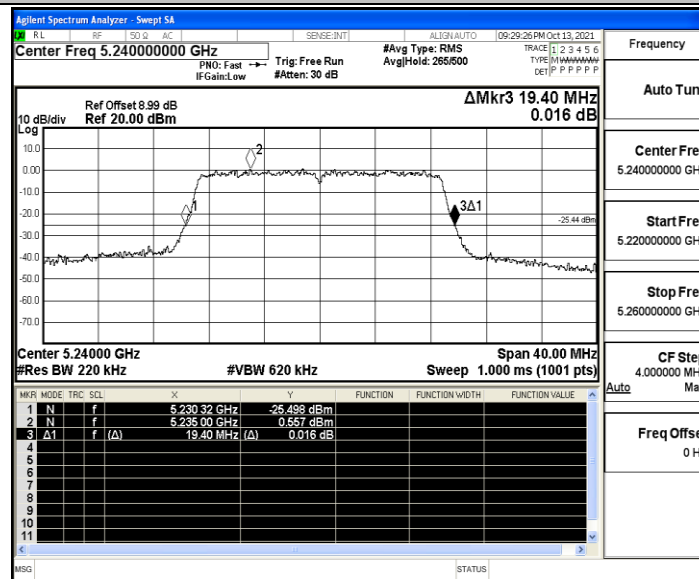

11AC40SISO_Ant1_5190

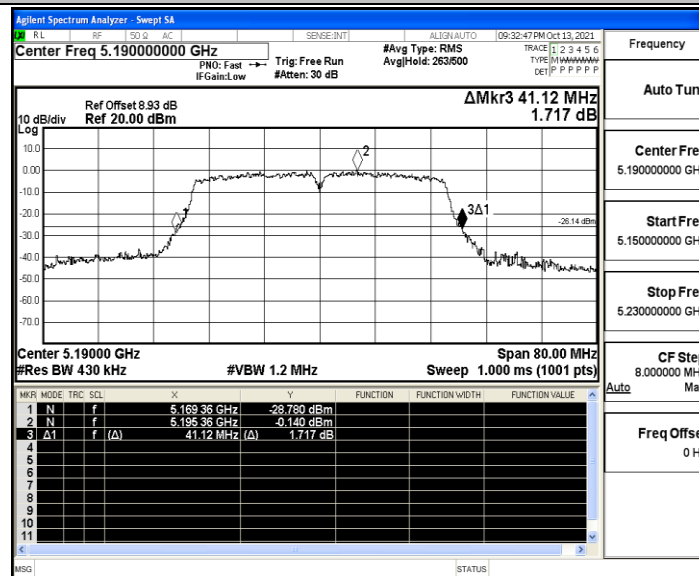


11AC40SISO_Ant1_5230

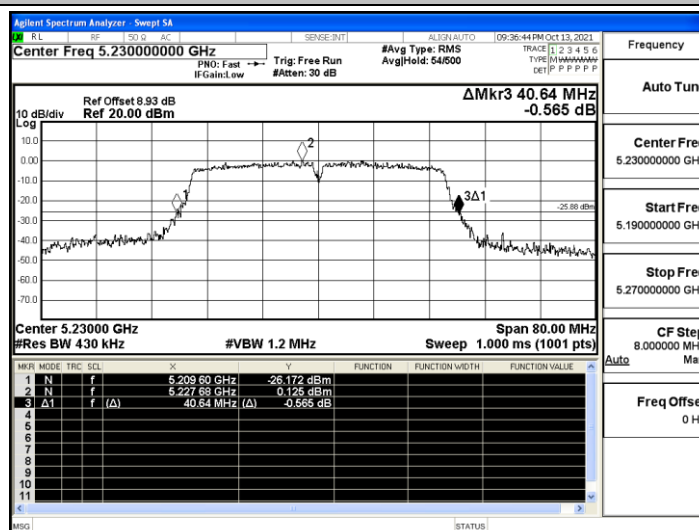



11AC80SISO_Ant1_5210

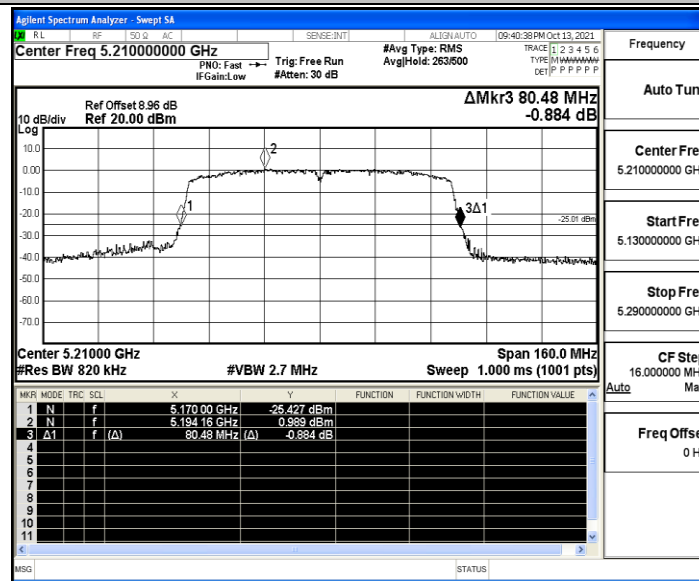



D.2 Maximum conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	11.82	≤ 23.98	PASS
		5200	11.84	≤ 23.98	PASS
		5240	11.88	≤ 23.98	PASS
11N20SISO	Ant1	5180	11.77	≤ 23.98	PASS
		5200	11.33	≤ 23.98	PASS
		5240	12.07	≤ 23.98	PASS
11N40SISO	Ant1	5190	12.04	≤ 23.98	PASS
		5230	11.24	≤ 23.98	PASS
11AC20SISO	Ant1	5180	11.62	≤ 23.98	PASS
		5200	10.99	≤ 23.98	PASS
		5240	10.95	≤ 23.98	PASS
11AC40SISO	Ant1	5190	10.32	≤ 23.98	PASS
		5230	10.91	≤ 23.98	PASS
11AC80SISO	Ant1	5210	11.51	≤ 23.98	PASS

Note: The Duty Cycle Factor is compensated in the graph.



D.3 Maximum power spectral density

Test Result


TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	1.00	≤11	PASS
		5200	0.71	≤11	PASS
		5240	0.88	≤11	PASS
11N20SISO	Ant1	5180	0.63	≤11	PASS
		5200	0.02	≤11	PASS
		5240	1.02	≤11	PASS
11N40SISO	Ant1	5190	-1.54	≤11	PASS
		5230	-2.48	≤11	PASS
11AC20SISO	Ant1	5180	0.07	≤11	PASS
		5200	-0.35	≤11	PASS
		5240	0.03	≤11	PASS
11AC40SISO	Ant1	5190	-3.38	≤11	PASS
		5230	-2.79	≤11	PASS
11AC80SISO	Ant1	5210	-5.02	≤11	PASS

Note: The Duty Cycle Factor is compensated in the graph.




Test Graphs


11A_Ant1_5180

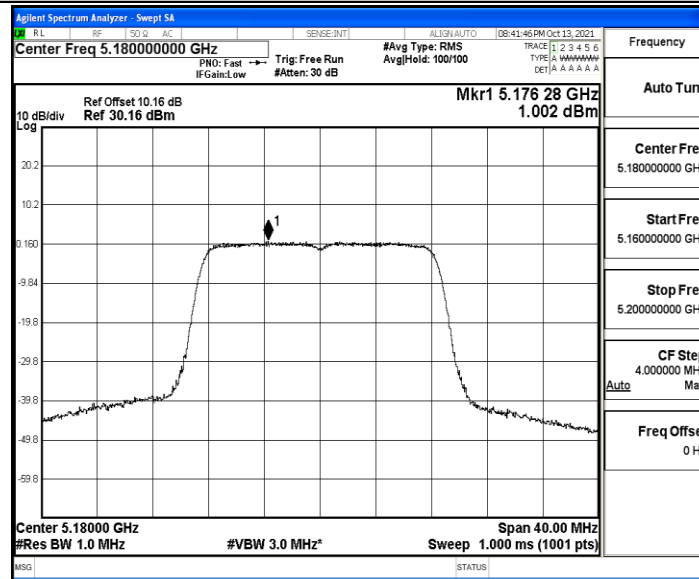


11A_Ant1_5200

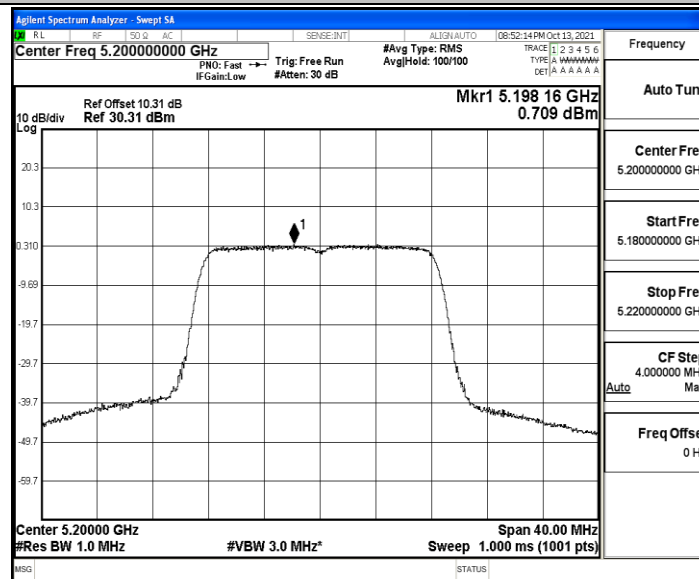


11A_Ant1_5240

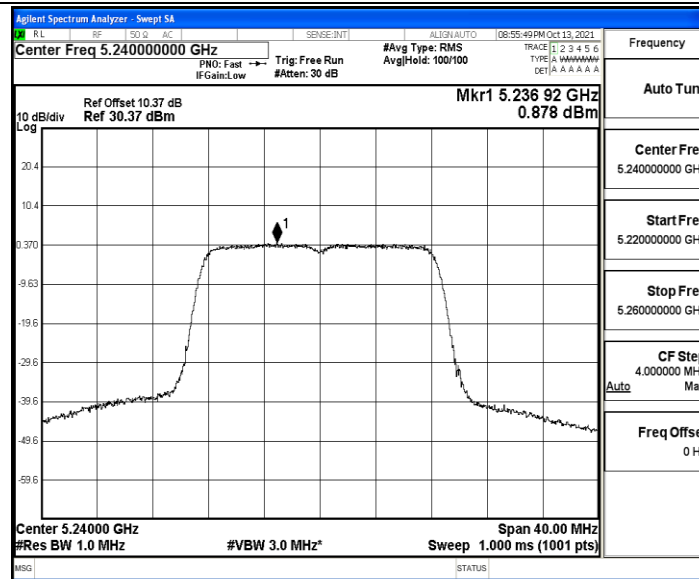

11N20SISO_Ant1_5180

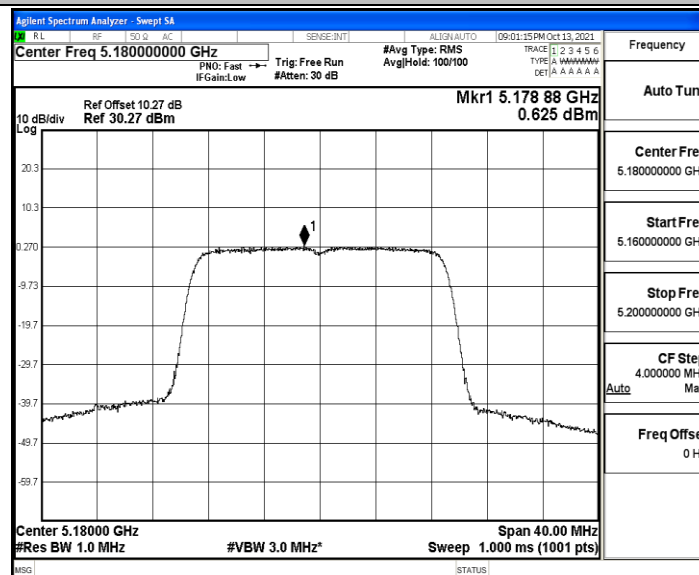


11N20SISO_Ant1_5200

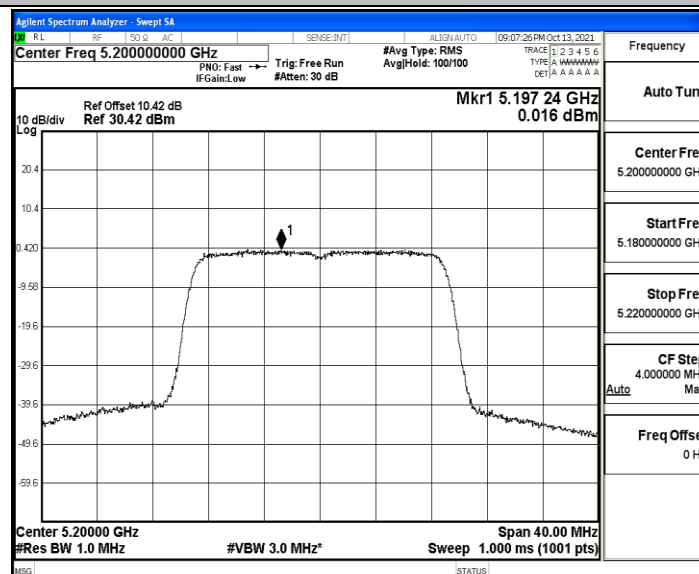





11N20SISO_Ant1_5240

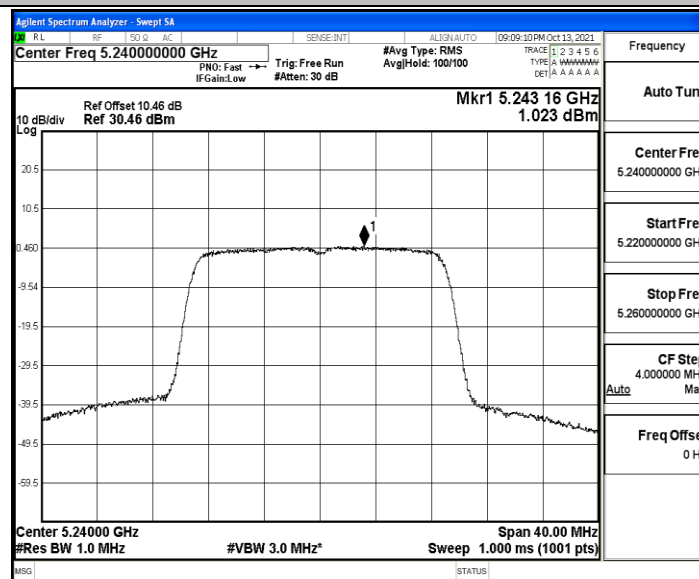


11N40SISO_Ant1_5190

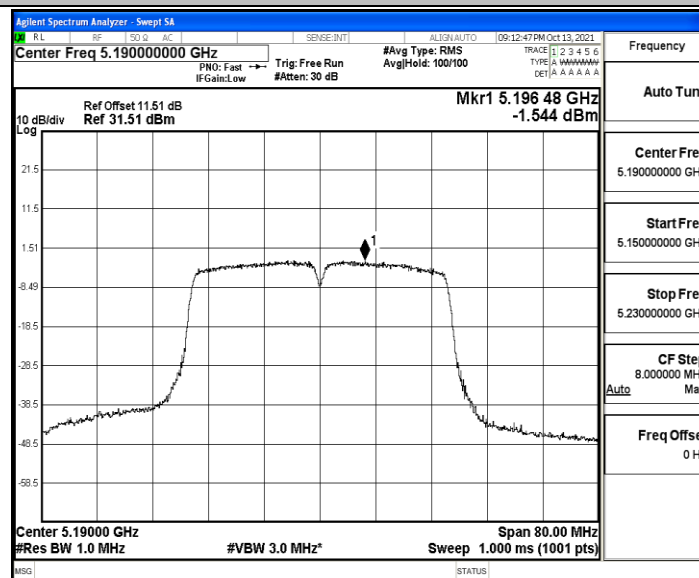


11N40SISO_Ant1_5230

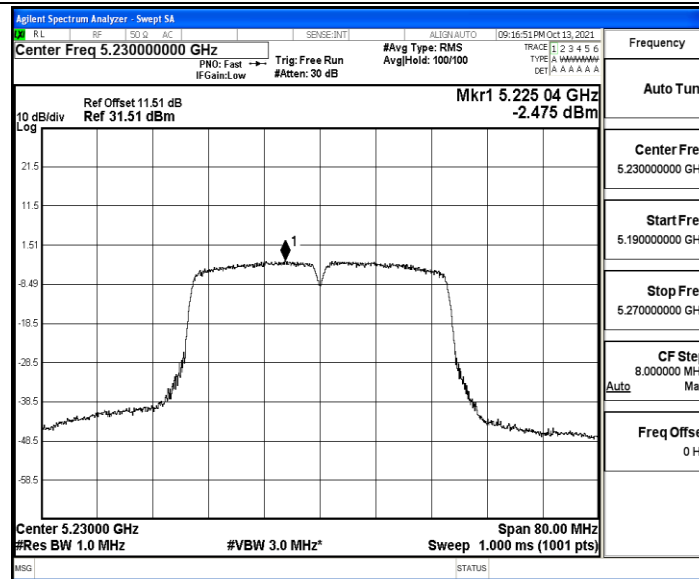

11AC20SISO_Ant1_5180

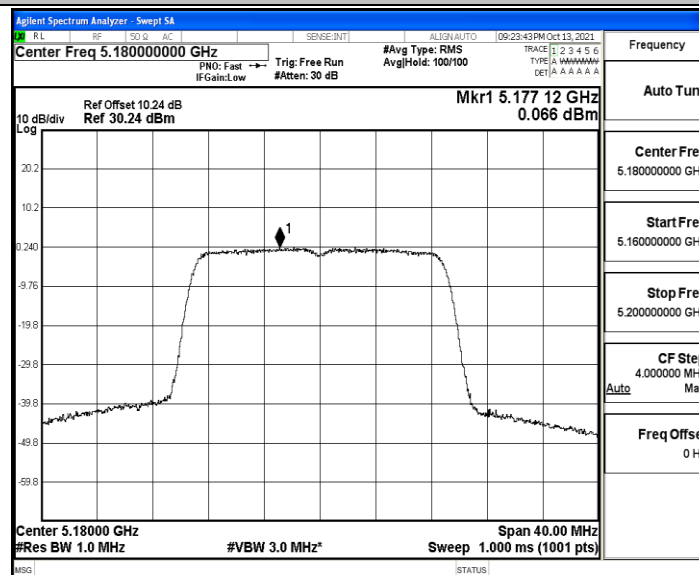


11AC20SISO_Ant1_5200

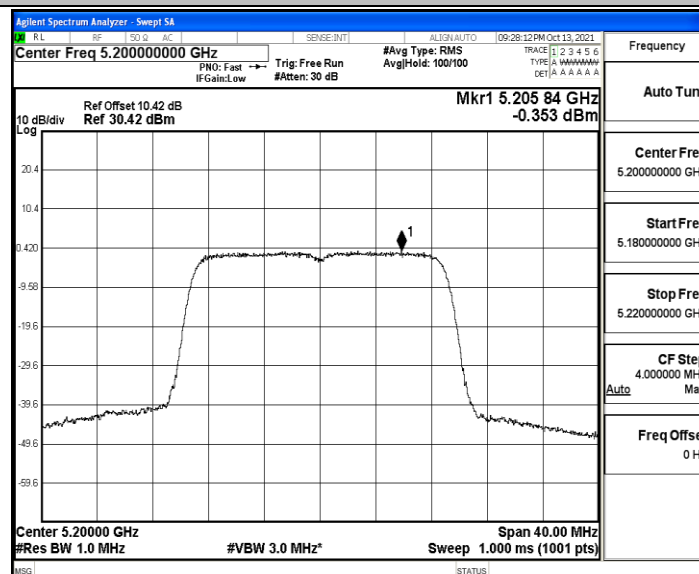





11AC20SISO_Ant1_5240

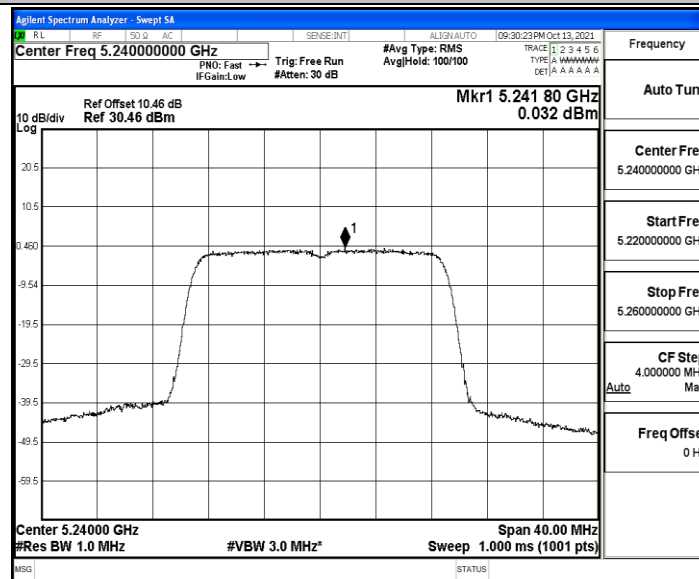


11AC40SISO_Ant1_5190

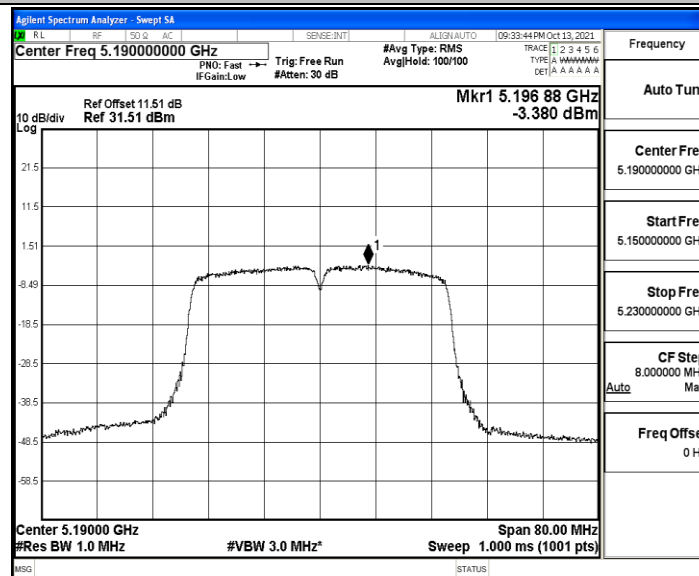

11AC40SISO_Ant1_5230

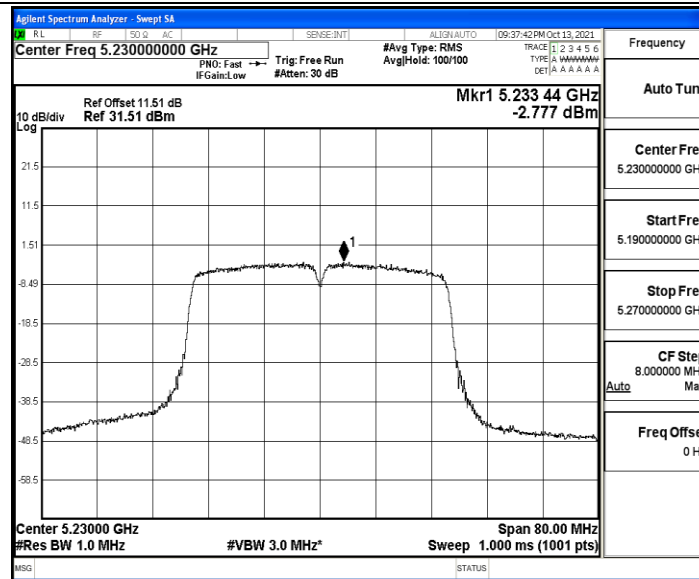

11AC80SISO_Ant1_5210

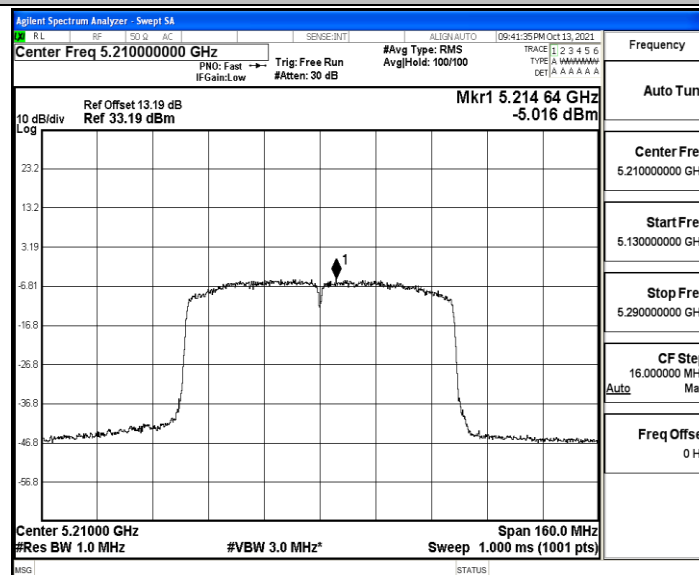



D.4 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
11A	Ant1	Low	5180	AV	4500.000	-49.63	≤-41.20	45.57	≤54	PASS
				AV	5100.600	-47.43	≤-41.20	47.77	≤54	PASS
				AV	5150.000	-47.56	≤-41.20	47.64	≤54	PASS
				Peak	4500.000	-42.56	≤-21.20	52.64	≤68.2	PASS
				Peak	4895.500	-37.77	≤-21.20	57.43	≤68.2	PASS
				Peak	5150.000	-40.97	≤-21.20	54.23	≤68.2	PASS
		High	5240	AV	5350.000	-47.16	≤-41.20	48.04	≤54	PASS
				AV	5397.840	-46.89	≤-41.20	48.31	≤54	PASS
				AV	5460.000	-47.76	≤-41.20	47.44	≤54	PASS
				Peak	5350.000	-40.35	≤-21.20	54.85	≤68.2	PASS
				Peak	5408.640	-37.29	≤-21.20	57.91	≤68.2	PASS
				Peak	5460.000	-42.03	≤-21.20	53.17	≤68.2	PASS
11N20SIS O	Ant1	Low	5180	AV	4500.000	-49.54	≤-41.20	45.66	≤54	PASS
				AV	5100.600	-47.46	≤-41.20	47.74	≤54	PASS
				AV	5150.000	-47.53	≤-41.20	47.67	≤54	PASS
				Peak	4500.000	-42.25	≤-21.20	52.95	≤68.2	PASS
				Peak	4877.300	-37.64	≤-21.20	57.56	≤68.2	PASS
				Peak	5150.000	-40.53	≤-21.20	54.67	≤68.2	PASS
		High	5240	AV	5350.000	-47.11	≤-41.20	48.09	≤54	PASS
				AV	5402.640	-46.97	≤-41.20	48.23	≤54	PASS
				AV	5460.000	-47.74	≤-41.20	47.46	≤54	PASS
				Peak	5350.000	-39.48	≤-21.20	55.72	≤68.2	PASS
				Peak	5407.920	-37.86	≤-21.20	57.34	≤68.2	PASS
				Peak	5460.000	-40.15	≤-21.20	55.05	≤68.2	PASS
11N40SIS O	Ant1	Low	5190	AV	4500.000	-49.34	≤-41.20	45.86	≤54	PASS
				AV	5149.600	-42.66	≤-41.20	52.54	≤54	PASS
				AV	5150.000	-42.3	≤-41.20	52.90	≤54	PASS
				Peak	4500.000	-41.23	≤-21.20	53.97	≤68.2	PASS
				Peak	5148.900	-36.48	≤-21.20	58.72	≤68.2	PASS
				Peak	5150.000	-34.52	≤-21.20	60.68	≤68.2	PASS
		High	5230	AV	5350.000	-46.98	≤-41.20	48.22	≤54	PASS
				AV	5384.080	-46.82	≤-41.20	48.38	≤54	PASS
				AV	5460.000	-47.33	≤-41.20	47.87	≤54	PASS
				Peak	5350.000	-41.83	≤-21.20	53.37	≤68.2	PASS
				Peak	5367.960	-38.26	≤-21.20	56.94	≤68.2	PASS
				Peak	5460.000	-40.52	≤-21.20	54.68	≤68.2	PASS



11AC20SI SO	Ant1	Low	5180	AV	4500.000	-49.45	≤ -41.20	45.75	≤ 54	PASS
				AV	5148.900	-47.53	≤ -41.20	47.67	≤ 54	PASS
				AV	5150.000	-47.54	≤ -41.20	47.66	≤ 54	PASS
				Peak	4500.000	-43.64	≤ -21.20	51.56	≤ 68.2	PASS
				Peak	5062.800	-37.99	≤ -21.20	57.21	≤ 68.2	PASS
				Peak	5150.000	-41.15	≤ -21.20	54.05	≤ 68.2	PASS
		High	5240	AV	5350.000	-47.16	≤ -41.20	48.04	≤ 54	PASS
				AV	5399.280	-47	≤ -41.20	48.20	≤ 54	PASS
				AV	5460.000	-47.65	≤ -41.20	47.55	≤ 54	PASS
				Peak	5350.000	-40.19	≤ -21.20	55.01	≤ 68.2	PASS
				Peak	5402.640	-37.97	≤ -21.20	57.23	≤ 68.2	PASS
				Peak	5460.000	-41	≤ -21.20	54.20	≤ 68.2	PASS
11AC40SI SO	Ant1	Low	5190	AV	4500.000	-49.22	≤ -41.20	45.98	≤ 54	PASS
				AV	5149.600	-44.97	≤ -41.20	50.23	≤ 54	PASS
				AV	5150.000	-44.69	≤ -41.20	50.51	≤ 54	PASS
				Peak	4500.000	-42.69	≤ -21.20	52.51	≤ 68.2	PASS
				Peak	5149.600	-36.21	≤ -21.20	58.99	≤ 68.2	PASS
				Peak	5150.000	-35.58	≤ -21.20	59.62	≤ 68.2	PASS
		High	5230	AV	5350.000	-47.09	≤ -41.20	48.11	≤ 54	PASS
				AV	5353.660	-46.77	≤ -41.20	48.43	≤ 54	PASS
				AV	5460.000	-47.37	≤ -41.20	47.83	≤ 54	PASS
				Peak	5350.000	-41.18	≤ -21.20	54.02	≤ 68.2	PASS
				Peak	5409.820	-37.49	≤ -21.20	57.71	≤ 68.2	PASS
				Peak	5460.000	-41.75	≤ -21.20	53.45	≤ 68.2	PASS
11AC80SI SO	Ant1	Low	5210	AV	4500.000	-48.81	≤ -41.20	46.39	≤ 54	PASS
				AV	5149.500	-41.29	≤ -41.20	53.91	≤ 54	PASS
				AV	5150.000	-41.78	≤ -41.20	53.42	≤ 54	PASS
				Peak	4500.000	-42.09	≤ -21.20	53.11	≤ 68.2	PASS
				Peak	5145.000	-34.54	≤ -21.20	60.66	≤ 68.2	PASS
				Peak	5150.000	-36.73	≤ -21.20	58.47	≤ 68.2	PASS
		High	5210	AV	5350.000	-46.84	≤ -41.20	48.36	≤ 54	PASS
				AV	5369.560	-46.29	≤ -41.20	48.91	≤ 54	PASS
				AV	5460.000	-47	≤ -41.20	48.20	≤ 54	PASS
				Peak	5350.000	-40.48	≤ -21.20	54.72	≤ 68.2	PASS
				Peak	5390.280	-37.47	≤ -21.20	57.73	≤ 68.2	PASS
				Peak	5460.000	-39.64	≤ -21.20	55.56	≤ 68.2	PASS


Note:

1. The Antenna Gain is compensated in the graph.
2. For transmitters operating in 5150-5250 GHz band: The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.




Test Graphs


11A_Ant1_Low_5180_AV

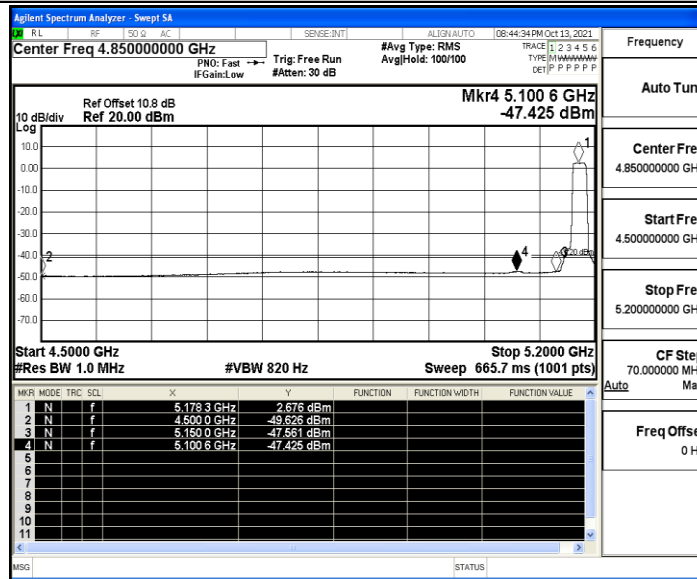


11A_Ant1_Low_5180_Peak

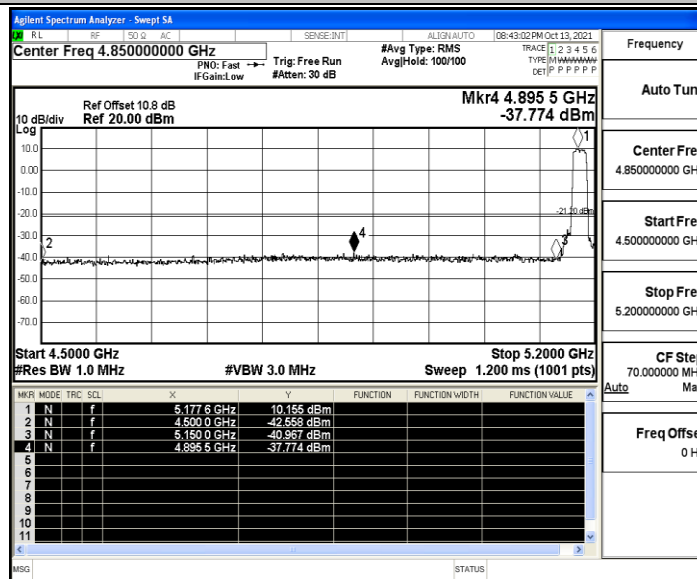


11A_Ant1_High_5240_AV

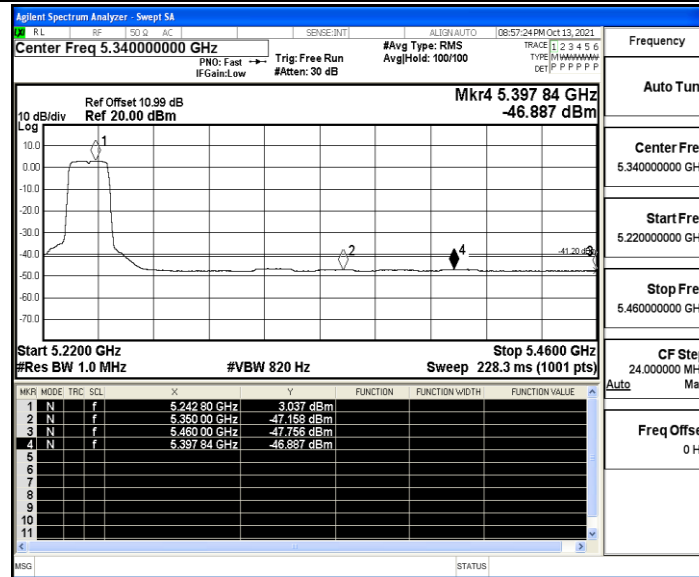

11A_Ant1_High_5240_Peak

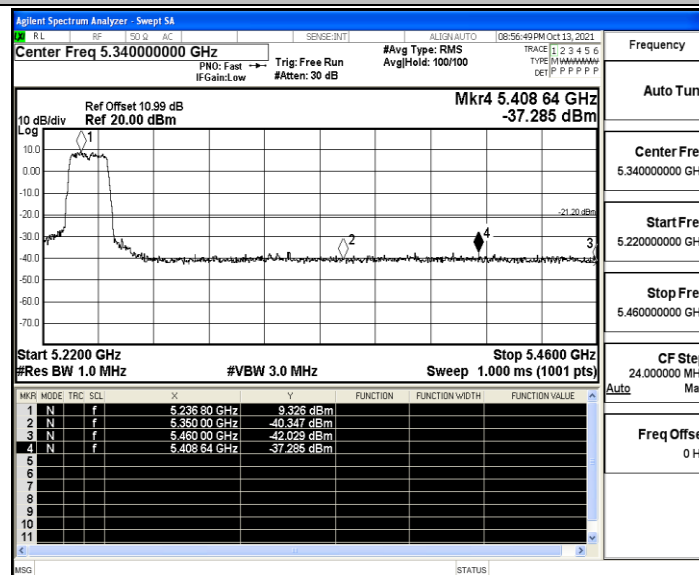


11N20SISO_Ant1_Low_5180_AV

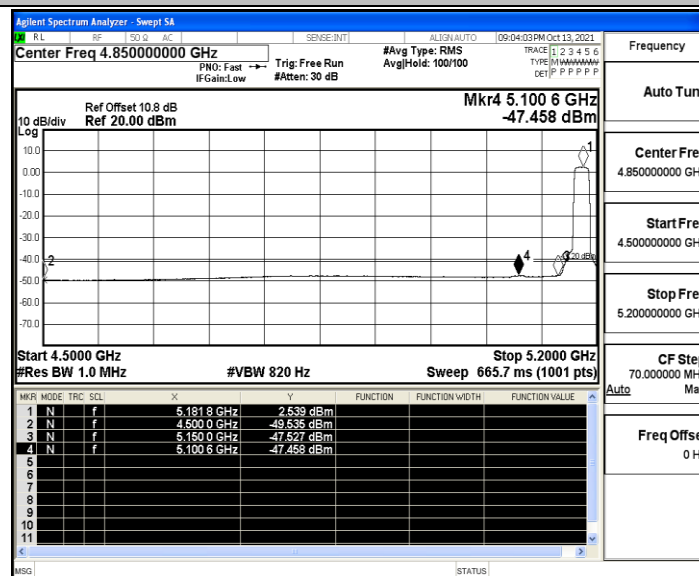





11N20SISO_Ant1_Low_5180_Peak

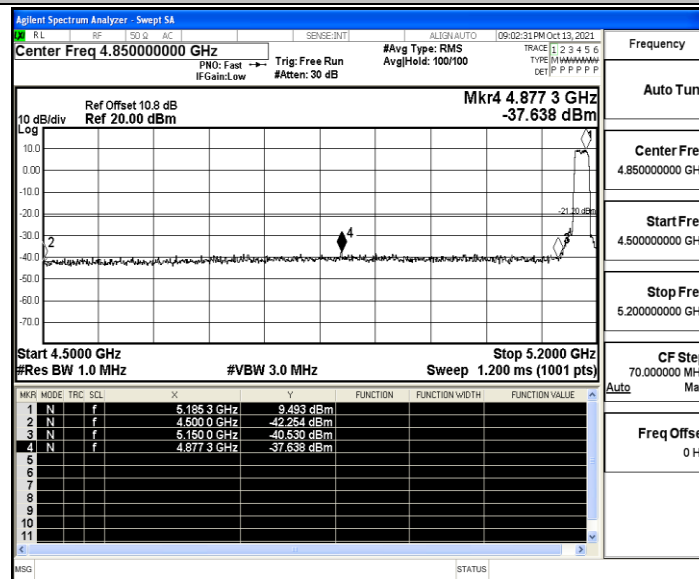


11N20SISO_Ant1_High_5240_AV

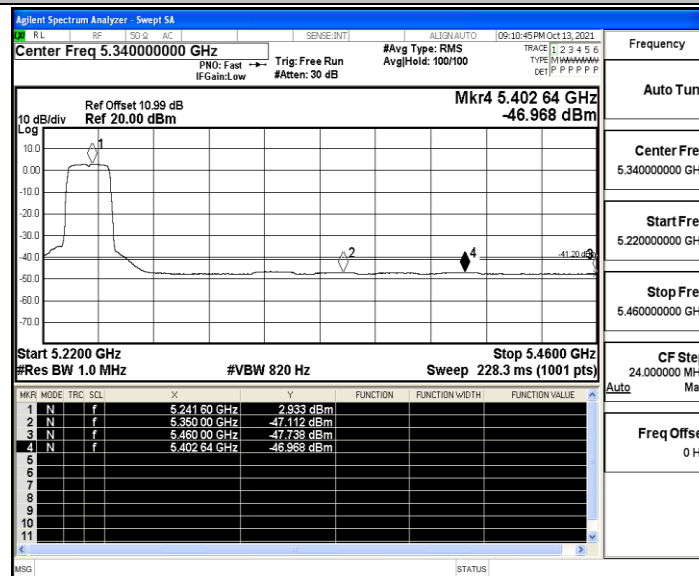


11N20SISO_Ant1_High_5240_Peak

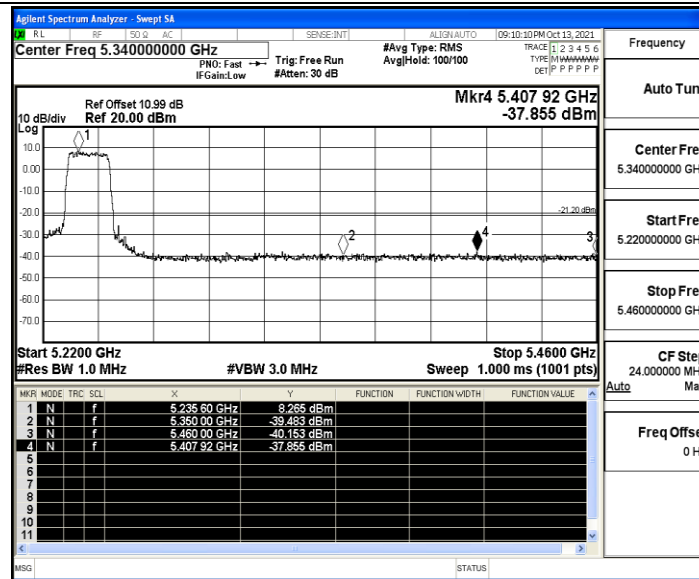

11N40SISO_Ant1_Low_5190_AV

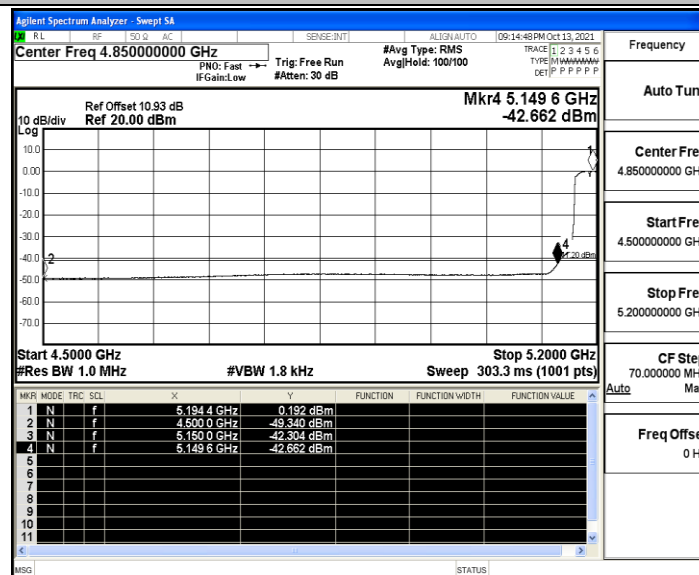


11N40SISO_Ant1_Low_5190_Peak

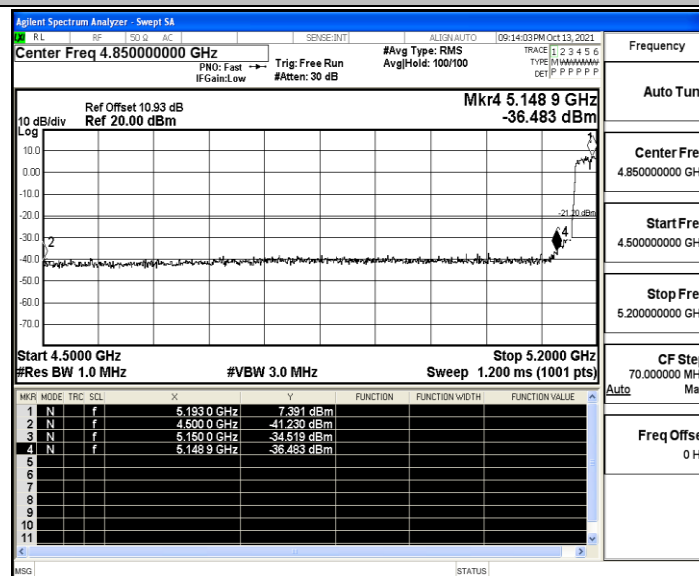





11N40SISO_Ant1_High_5230_AV

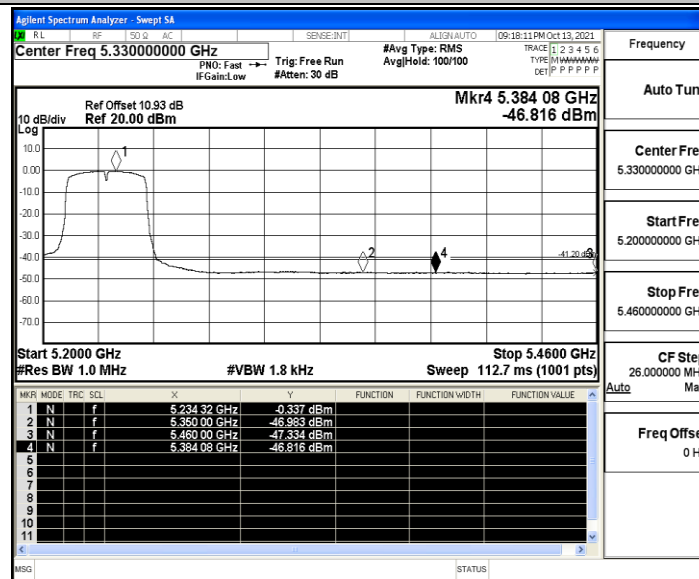


11N40SISO_Ant1_High_5230_Peak

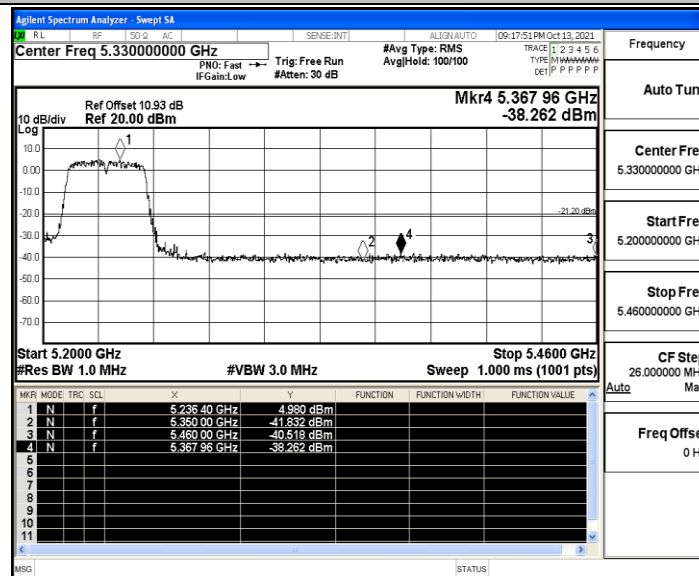


11AC20SISO_Ant1_Low_5180_AV

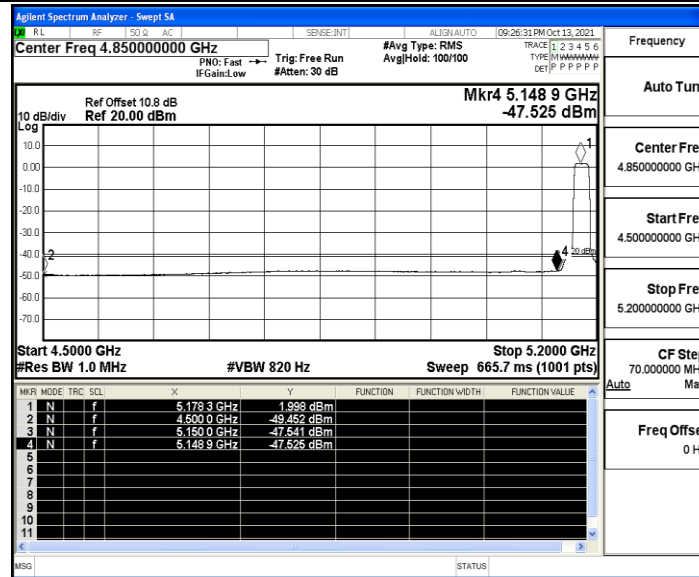

11AC20SISO_Ant1_Low_5180_Peak

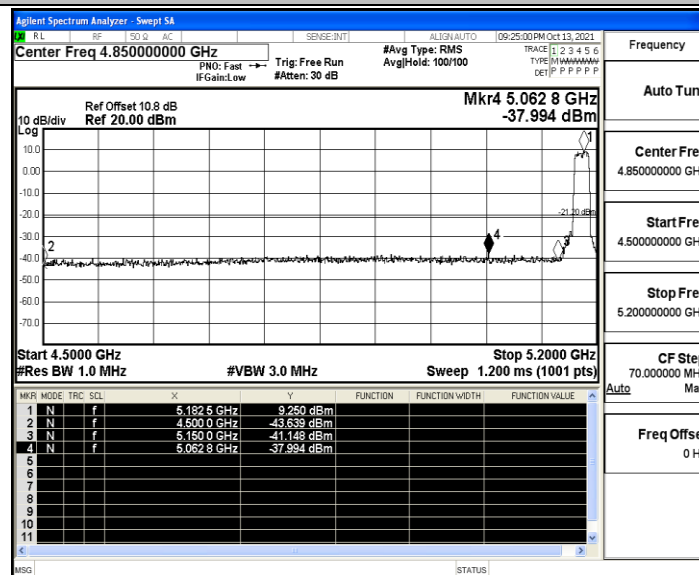


11AC20SISO_Ant1_High_5240_AV

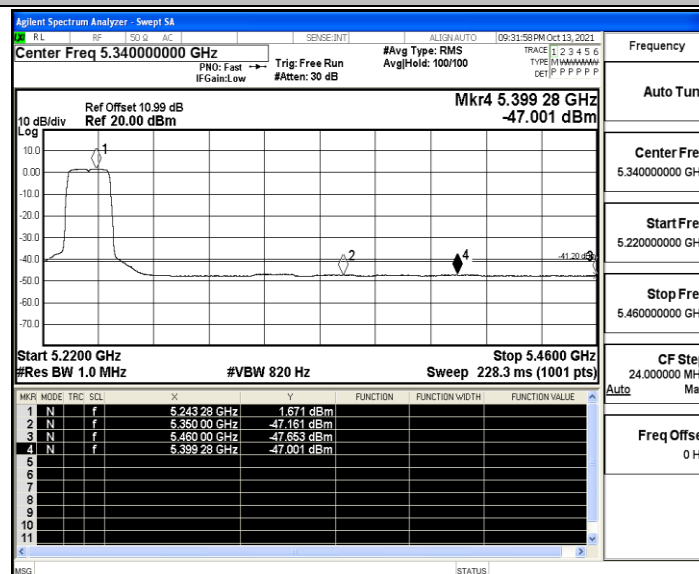





11AC20SISO_Ant1_High_5240_Peak

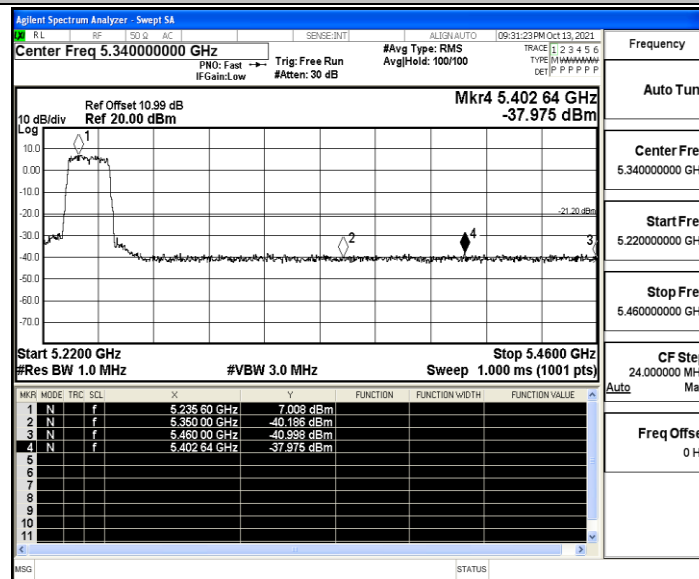


11AC40SISO_Ant1_Low_5190_AV

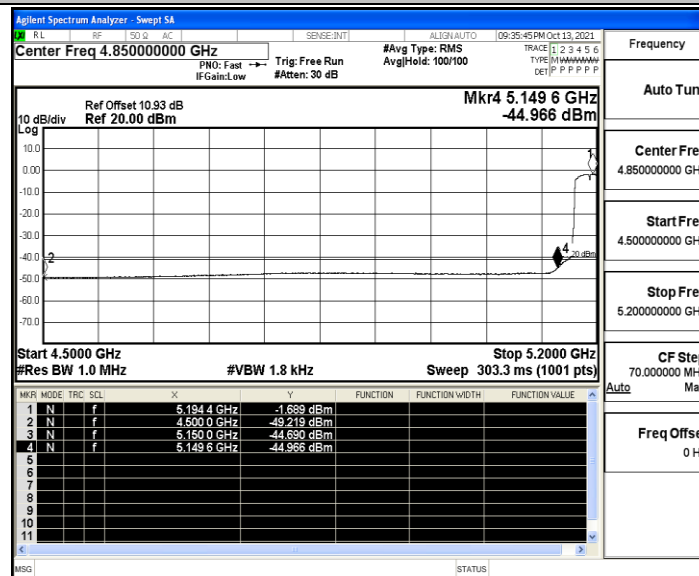


11AC40SISO_Ant1_Low_5190_Peak

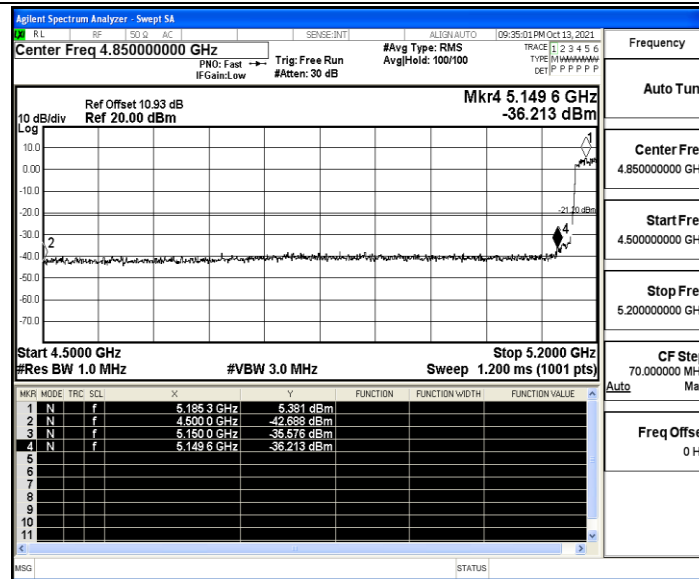

11AC40SISO_Ant1_High_5230_AV

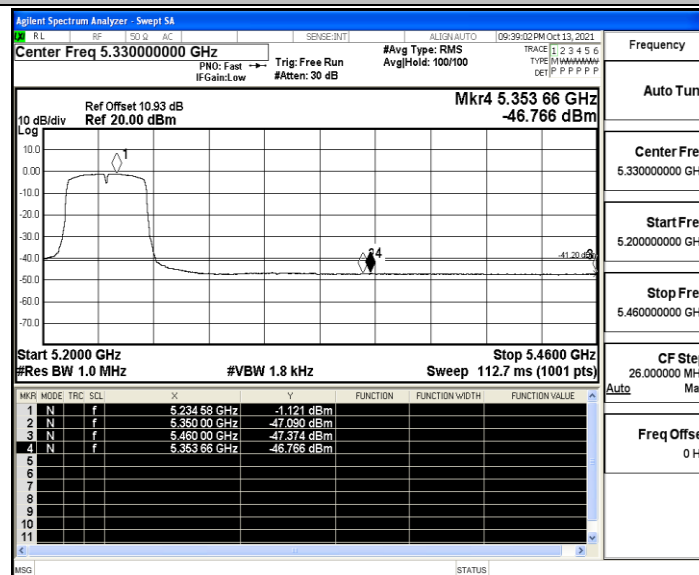


11AC40SISO_Ant1_High_5230_Peak

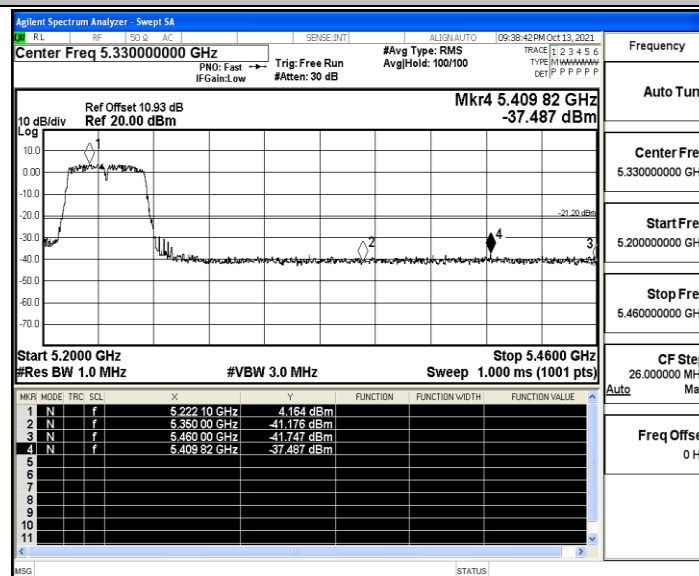





11AC80SISO_Ant1_Low_5210_AV

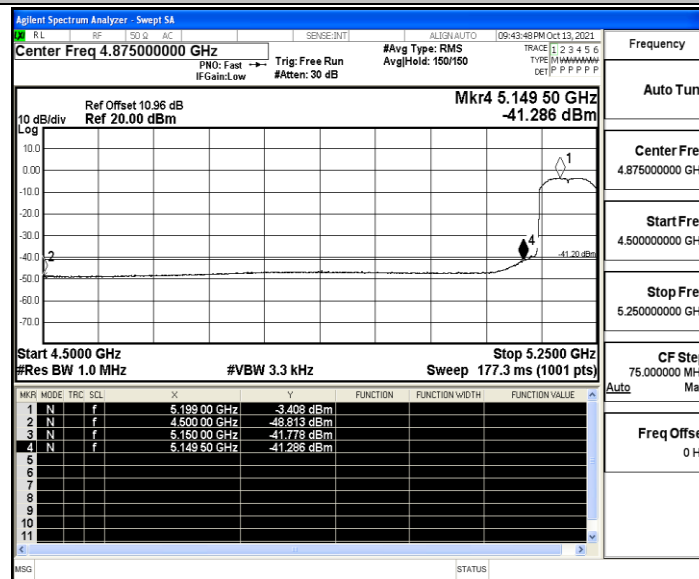


11AC80SISO_Ant1_Low_5210_Peak

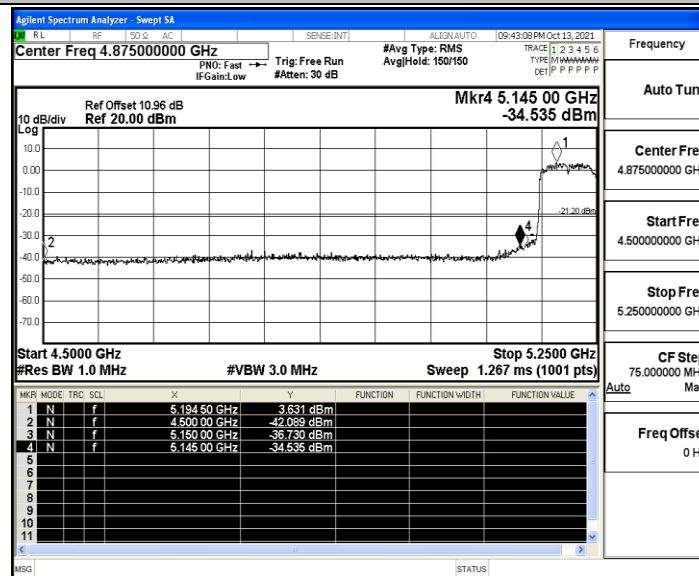

11AC80SISO_Ant1_High_5210_AV

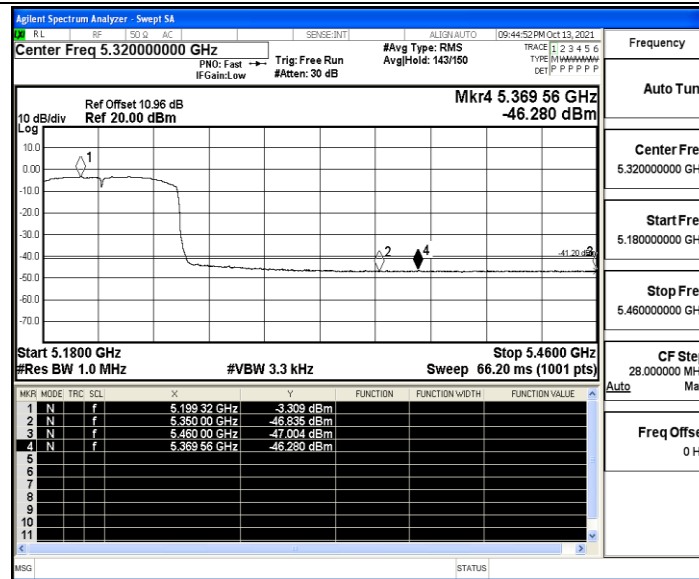

11AC80SISO_Ant1_High_5210_Peak

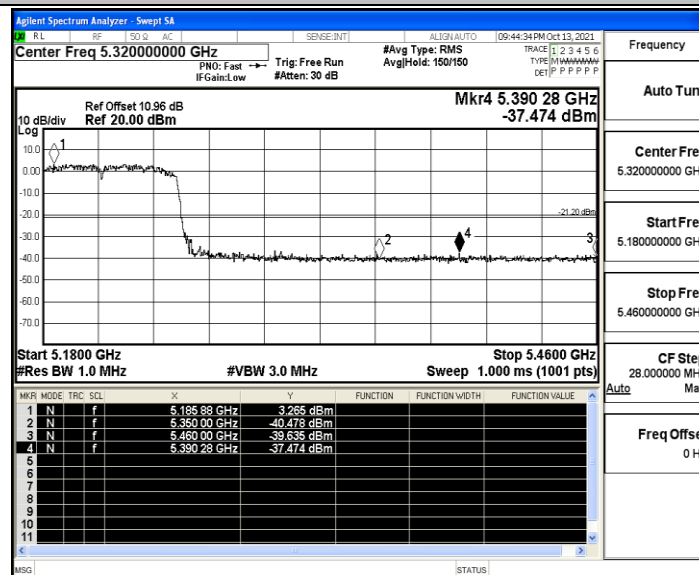



D.5 Frequency Stability

Test Result

TestMode	Antenna	Channel	Voltage					Verdict
			Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	
11A	Ant1	5180	NV	NT	-11000	-2.123552	20	PASS
			LV	NT	-14000	-2.702703	20	PASS
			HV	NT	-15000	-2.895753	20	PASS
		5200	NV	NT	-15000	-2.884615	20	PASS
			LV	NT	-16000	-3.076923	20	PASS
			HV	NT	-17000	-3.269231	20	PASS
		5240	NV	NT	-15000	-2.862595	20	PASS
			LV	NT	-17000	-3.244275	20	PASS
			HV	NT	-17000	-3.244275	20	PASS
11N20SISO	Ant1	5180	NV	NT	-15000	-2.895753	20	PASS
			LV	NT	-17000	-3.281853	20	PASS
			HV	NT	-17000	-3.281853	20	PASS
		5200	NV	NT	-16000	-3.076923	20	PASS
			LV	NT	-17000	-3.269231	20	PASS
			HV	NT	-17000	-3.269231	20	PASS
		5240	NV	NT	-16000	-3.053435	20	PASS
			LV	NT	-17000	-3.244275	20	PASS
			HV	NT	-17000	-3.244275	20	PASS
11N40SISO	Ant1	5190	NV	NT	-16000	-3.082852	20	PASS
			LV	NT	-16000	-3.082852	20	PASS
			HV	NT	-16000	-3.082852	20	PASS
		5230	NV	NT	-16000	-3.059273	20	PASS
			LV	NT	-17000	-3.250478	20	PASS
			HV	NT	-17000	-3.250478	20	PASS
11AC20SISO	Ant1	5180	NV	NT	-15000	-2.895753	20	PASS
			LV	NT	-16000	-3.088803	20	PASS
			HV	NT	-16000	-3.088803	20	PASS
		5200	NV	NT	-15000	-2.884615	20	PASS
			LV	NT	-16000	-3.076923	20	PASS
			HV	NT	-16000	-3.076923	20	PASS
		5240	NV	NT	-15000	-2.862595	20	PASS
			LV	NT	-16000	-3.053435	20	PASS
			HV	NT	-17000	-3.244275	20	PASS
11AC40SISO	Ant1	5190	NV	NT	-15000	-2.890173	20	PASS
			LV	NT	-16000	-3.082852	20	PASS



		5230	HV	NT	-16000	-3.082852	20	PASS
			NV	NT	-15000	-2.868069	20	PASS
			LV	NT	-16000	-3.059273	20	PASS
			HV	NT	-17000	-3.250478	20	PASS
11AC80SI SO	Ant1	5210	NV	NT	-16000	-3.071017	20	PASS
			LV	NT	-17000	-3.262956	20	PASS
			HV	NT	-17000	-3.262956	20	PASS

Temperature								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	-30	-16000	-3.088803	20	PASS
			NV	-20	-16000	-3.088803	20	PASS
			NV	-10	-16000	-3.088803	20	PASS
			NV	0	-17000	-3.281853	20	PASS
			NV	10	-17000	-3.281853	20	PASS
			NV	20	-17000	-3.281853	20	PASS
			NV	30	-17000	-3.281853	20	PASS
			NV	40	-17000	-3.281853	20	PASS
			NV	50	-17000	-3.281853	20	PASS
		5200	NV	-30	-17000	-3.269231	20	PASS
			NV	-20	-17000	-3.269231	20	PASS
			NV	-10	-17000	-3.269231	20	PASS
			NV	0	-17000	-3.269231	20	PASS
			NV	10	-17000	-3.269231	20	PASS
			NV	20	-17000	-3.269231	20	PASS
			NV	30	-17000	-3.269231	20	PASS
			NV	40	-17000	-3.269231	20	PASS
			NV	50	-17000	-3.269231	20	PASS
		5240	NV	-30	-17000	-3.244275	20	PASS
			NV	-20	-17000	-3.244275	20	PASS
			NV	-10	-17000	-3.244275	20	PASS
			NV	0	-17000	-3.244275	20	PASS
			NV	10	-17000	-3.244275	20	PASS
			NV	20	-17000	-3.244275	20	PASS
			NV	30	-17000	-3.244275	20	PASS
			NV	40	-17000	-3.244275	20	PASS
			NV	50	-17000	-3.244275	20	PASS
11N20SIS O	Ant1	5180	NV	-30	-17000	-3.281853	20	PASS
			NV	-20	-17000	-3.281853	20	PASS
			NV	-10	-17000	-3.281853	20	PASS
			NV	0	-17000	-3.281853	20	PASS
			NV	10	-17000	-3.281853	20	PASS



			NV	20	-17000	-3.281853	20	PASS
			NV	30	-17000	-3.281853	20	PASS
			NV	40	-17000	-3.281853	20	PASS
			NV	50	-17000	-3.281853	20	PASS
		5200	NV	-30	-17000	-3.269231	20	PASS
			NV	-20	-17000	-3.269231	20	PASS
			NV	-10	-17000	-3.269231	20	PASS
			NV	0	-17000	-3.269231	20	PASS
			NV	10	-17000	-3.269231	20	PASS
			NV	20	-17000	-3.269231	20	PASS
			NV	30	-17000	-3.269231	20	PASS
			NV	40	-17000	-3.269231	20	PASS
			NV	50	-17000	-3.269231	20	PASS
		5240	NV	-30	-17000	-3.244275	20	PASS
			NV	-20	-17000	-3.244275	20	PASS
			NV	-10	-17000	-3.244275	20	PASS
			NV	0	-17000	-3.244275	20	PASS
			NV	10	-17000	-3.244275	20	PASS
			NV	20	-17000	-3.244275	20	PASS
			NV	30	-17000	-3.244275	20	PASS
			NV	40	-17000	-3.244275	20	PASS
11N40SIS O	Ant1	5190	NV	-30	-16000	-3.082852	20	PASS
			NV	-20	-16000	-3.082852	20	PASS
			NV	-10	-17000	-3.27553	20	PASS
			NV	0	-17000	-3.27553	20	PASS
			NV	10	-17000	-3.27553	20	PASS
			NV	20	-17000	-3.27553	20	PASS
			NV	30	-17000	-3.27553	20	PASS
			NV	40	-17000	-3.27553	20	PASS
		5230	NV	50	-17000	-3.27553	20	PASS
			NV	-30	-17000	-3.250478	20	PASS
			NV	-20	-17000	-3.250478	20	PASS
			NV	-10	-17000	-3.250478	20	PASS
			NV	0	-17000	-3.250478	20	PASS
			NV	10	-17000	-3.250478	20	PASS
			NV	20	-17000	-3.250478	20	PASS
			NV	30	-17000	-3.250478	20	PASS
11AC20SI SO	Ant1	5180	NV	40	-17000	-3.250478	20	PASS
			NV	50	-17000	-3.250478	20	PASS
			NV	-30	-16000	-3.088803	20	PASS
			NV	-20	-16000	-3.088803	20	PASS
			NV	-10	-16000	-3.088803	20	PASS



			NV	0	-16000	-3.088803	20	PASS
			NV	10	-16000	-3.088803	20	PASS
			NV	20	-16000	-3.088803	20	PASS
			NV	30	-16000	-3.088803	20	PASS
			NV	40	-17000	-3.281853	20	PASS
			NV	50	-16000	-3.088803	20	PASS
		5200	NV	-30	-17000	-3.269231	20	PASS
			NV	-20	-17000	-3.269231	20	PASS
			NV	-10	-16000	-3.076923	20	PASS
			NV	0	-16000	-3.076923	20	PASS
			NV	10	-16000	-3.076923	20	PASS
			NV	20	-17000	-3.269231	20	PASS
			NV	30	-17000	-3.269231	20	PASS
			NV	40	-17000	-3.269231	20	PASS
			NV	50	-16000	-3.076923	20	PASS
		5240	NV	-30	-17000	-3.244275	20	PASS
			NV	-20	-17000	-3.244275	20	PASS
			NV	-10	-17000	-3.244275	20	PASS
			NV	0	-17000	-3.244275	20	PASS
			NV	10	-17000	-3.244275	20	PASS
			NV	20	-17000	-3.244275	20	PASS
			NV	30	-17000	-3.244275	20	PASS
			NV	40	-17000	-3.244275	20	PASS
			NV	50	-17000	-3.244275	20	PASS
11AC40SI SO	Ant1	5190	NV	-30	-16000	-3.082852	20	PASS
			NV	-20	-17000	-3.27553	20	PASS
			NV	-10	-16000	-3.082852	20	PASS
			NV	0	-16000	-3.082852	20	PASS
			NV	10	-16000	-3.082852	20	PASS
			NV	20	-16000	-3.082852	20	PASS
			NV	30	-16000	-3.082852	20	PASS
			NV	40	-16000	-3.082852	20	PASS
			NV	50	-16000	-3.082852	20	PASS
		5230	NV	-30	-17000	-3.250478	20	PASS
			NV	-20	-17000	-3.250478	20	PASS
			NV	-10	-17000	-3.250478	20	PASS
			NV	0	-17000	-3.250478	20	PASS
			NV	10	-17000	-3.250478	20	PASS
			NV	20	-17000	-3.250478	20	PASS
			NV	30	-17000	-3.250478	20	PASS
			NV	40	-17000	-3.250478	20	PASS
			NV	50	-17000	-3.250478	20	PASS
11AC80SI	Ant1	5210	NV	-30	-17000	-3.262956	20	PASS



SO			NV	-20	-17000	-3.262956	20	PASS
			NV	-10	-17000	-3.262956	20	PASS
			NV	0	-17000	-3.262956	20	PASS
			NV	10	-17000	-3.262956	20	PASS
			NV	20	-17000	-3.262956	20	PASS
			NV	30	-17000	-3.262956	20	PASS
			NV	40	-17000	-3.262956	20	PASS
			NV	50	-17000	-3.262956	20	PASS



D.6 Duty Cycle


Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11A	Ant1	5180	1.36	1.86	73.12	---	PASS
		5200	1.36	1.86	73.12	---	PASS
		5240	1.36	1.87	72.73	---	PASS
11N20SISO	Ant1	5180	1.27	1.78	71.35	---	PASS
		5200	1.27	1.78	71.35	---	PASS
		5240	1.27	1.78	71.35	---	PASS
11N40SISO	Ant1	5190	0.63	1.14	55.26	---	PASS
		5230	0.63	1.14	55.26	---	PASS
11AC20SISO	Ant1	5180	1.27	1.77	71.75	---	PASS
		5200	1.27	1.78	71.35	---	PASS
		5240	1.27	1.78	71.35	---	PASS
11AC40SISO	Ant1	5190	0.63	1.14	55.26	---	PASS
		5230	0.63	1.14	55.26	---	PASS
11AC80SISO	Ant1	5210	0.31	0.82	37.80	---	PASS




Test Graphs


11A_Ant1_5180

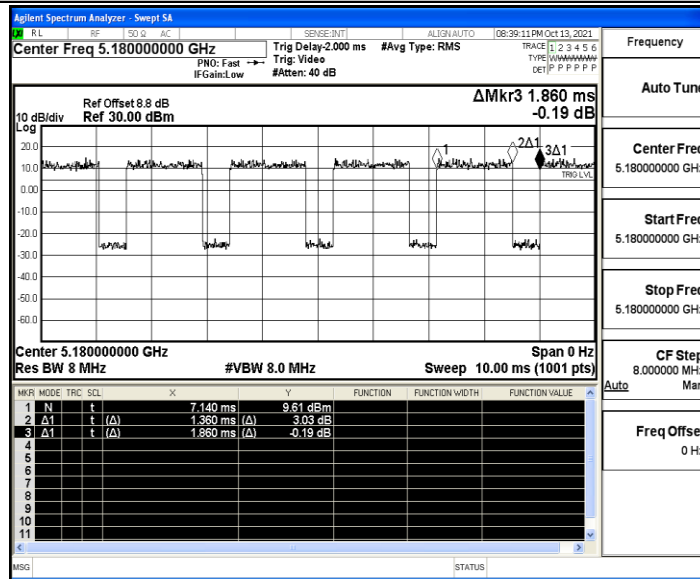


11A_Ant1_5200

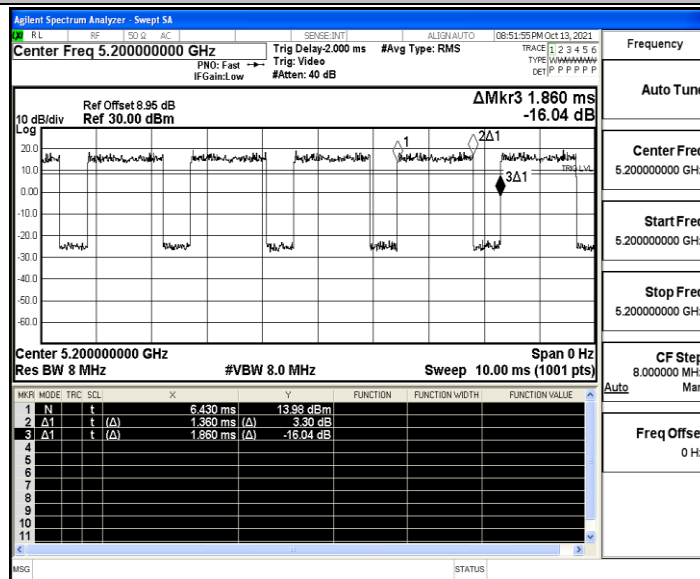


11A_Ant1_5240

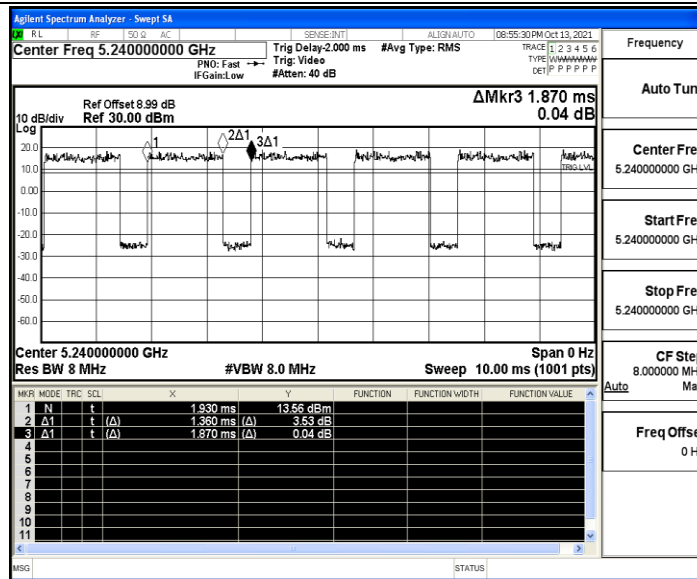

11N20SISO_Ant1_5180

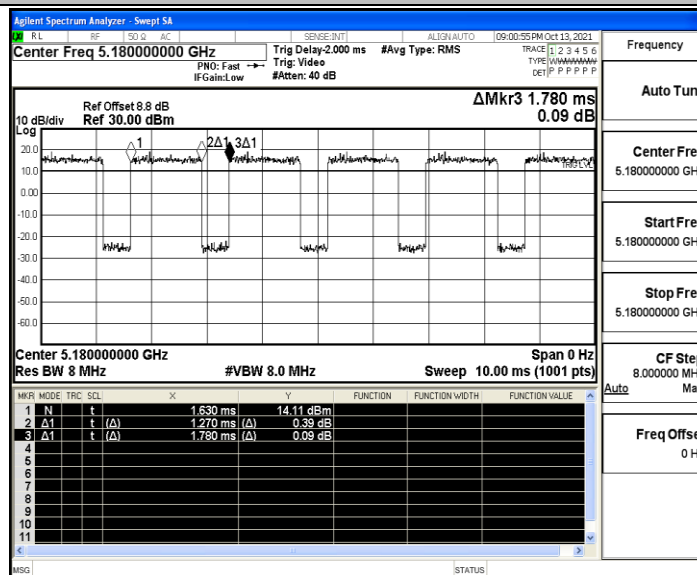


11N20SISO_Ant1_5200

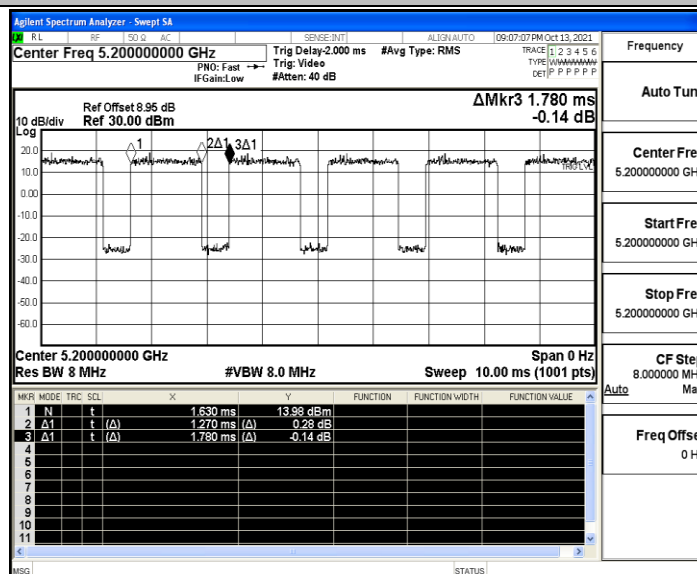





11N20SISO_Ant1_5240

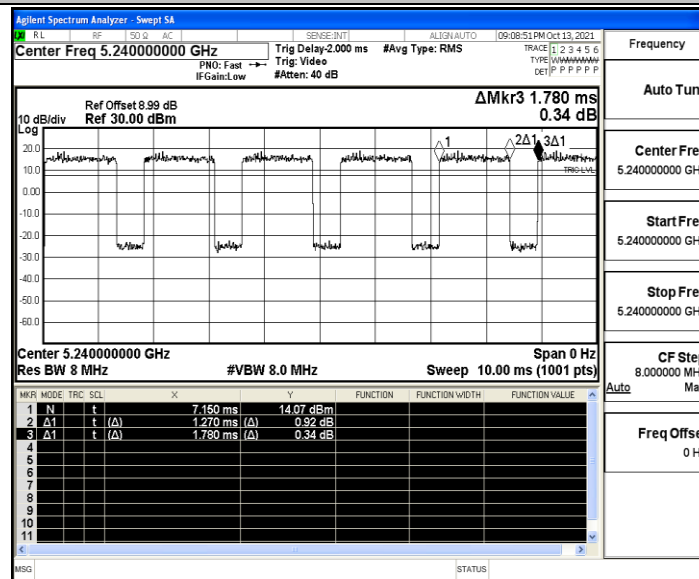


11N40SISO_Ant1_5190

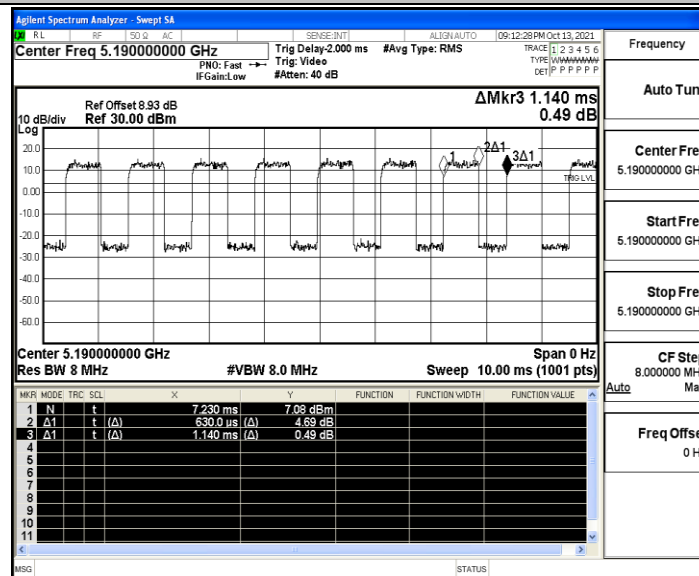


11N40SISO_Ant1_5230

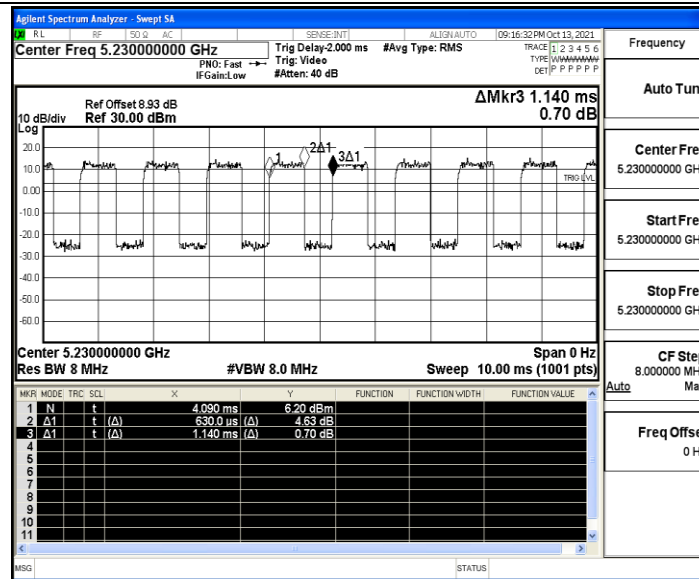

11AC20SISO_Ant1_5180

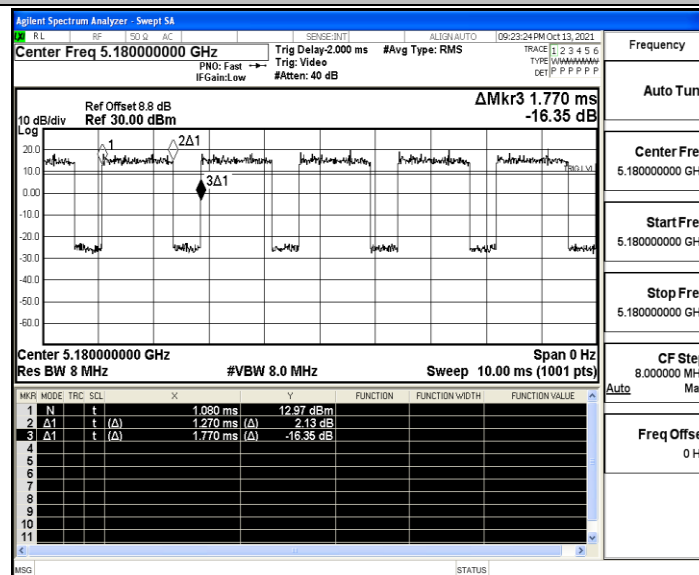


11AC20SISO_Ant1_5200

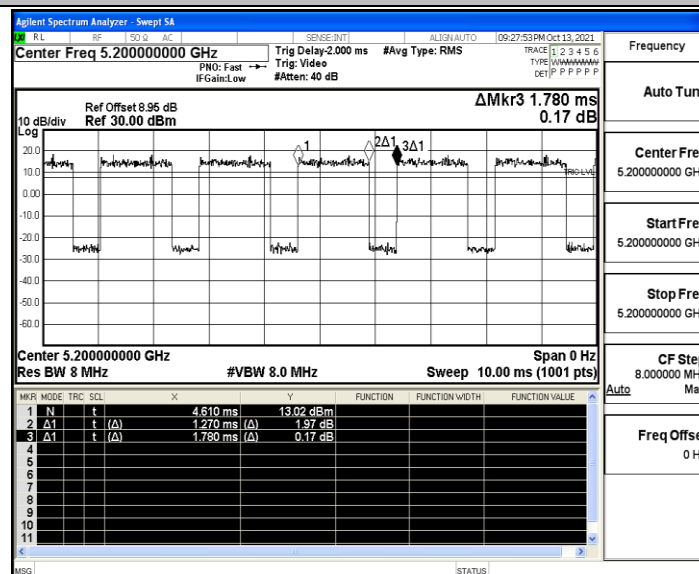




11AC20SISO_Ant1_5240

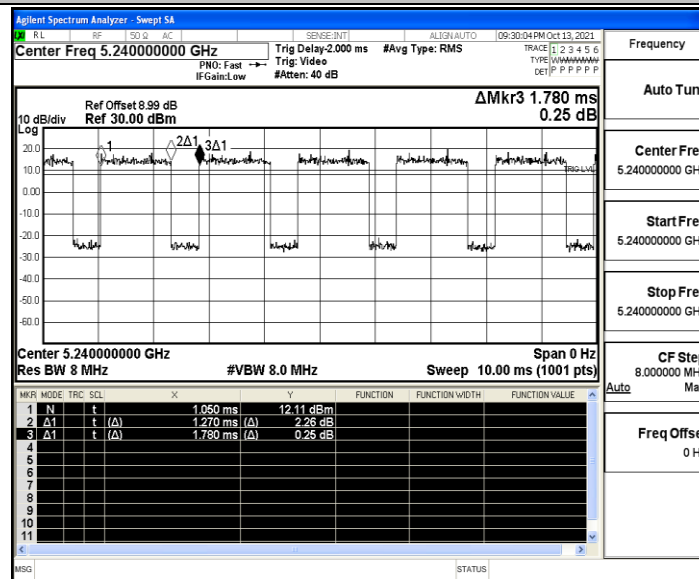

11AC40SISO_Ant1_5190

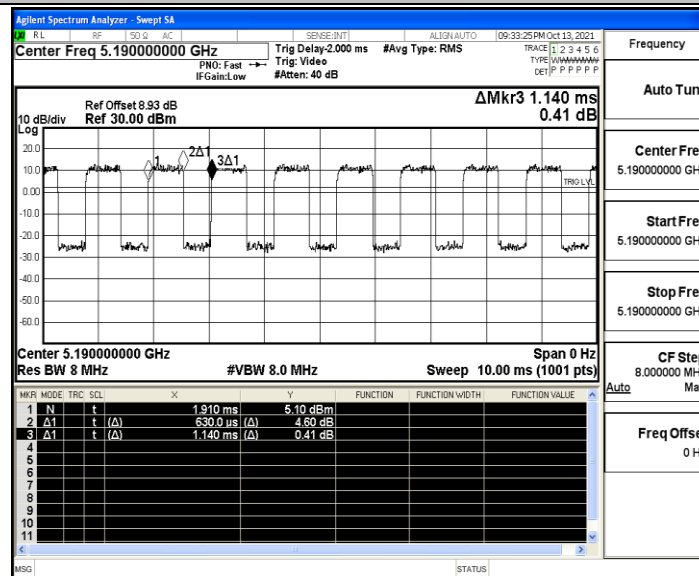

11AC40SISO_Ant1_5230

