

Appendix B: Test Results

APPENDIX B: TEST RESULTS	1
APPENDIX B.1: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL & HARMONICS.....	2
30MHz - 1GHz	2
1GHz - 18GHz.....	4
APPENDIX B.2: TEST RESULTS OF BAND EDGE.....	20
APPENDIX B.3: TEST RESULTS OF 20DB BANDWIDTH.....	26
APPENDIX B.4: TEST RESULTS OF 99% BANDWIDTH.....	28
APPENDIX B.5: TEST RESULTS OF CONDUCTED EMISSIONS ON AC MAINS	30


Note: The testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz to 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

Appendix B.1: Test Results of Field strength of fundamental & harmonics

30MHz - 1GHz

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

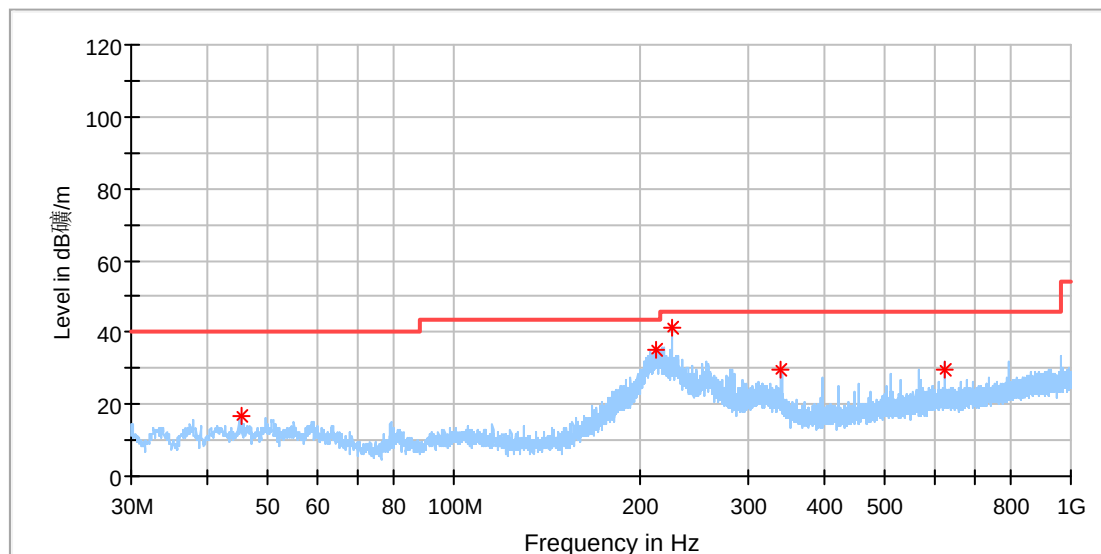


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.180500	16.60	40.00	23.40	100.0	H	137.0	-18.8
212.796500	35.29	43.50	8.21	100.0	H	0.0	-18.8
226.279500	41.50	46.00	4.50	100.0	H	185.0	-18.2
339.430000	29.69	46.00	16.31	100.0	H	63.0	-15.0
622.185000	29.43	46.00	16.57	100.0	H	77.0	-9.5

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

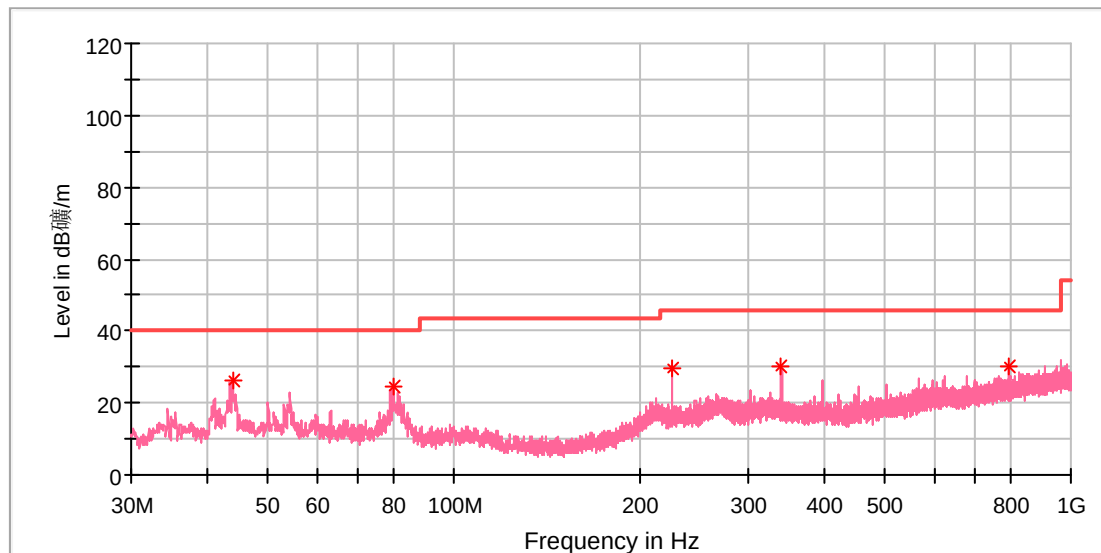

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.774000	26.29	40.00	13.71	100.0	V	236.0	-19.1
79.955000	24.44	40.00	15.56	100.0	V	359.0	-23.5
226.231000	29.71	46.00	16.29	100.0	V	326.0	-18.2
339.430000	30.12	46.00	15.88	100.0	V	209.0	-15.0
791.935000	30.14	46.00	15.86	100.0	V	47.0	-6.5


1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz Fundamental.

For miha bodytec m.ove (project title: MBT2.1 light):

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

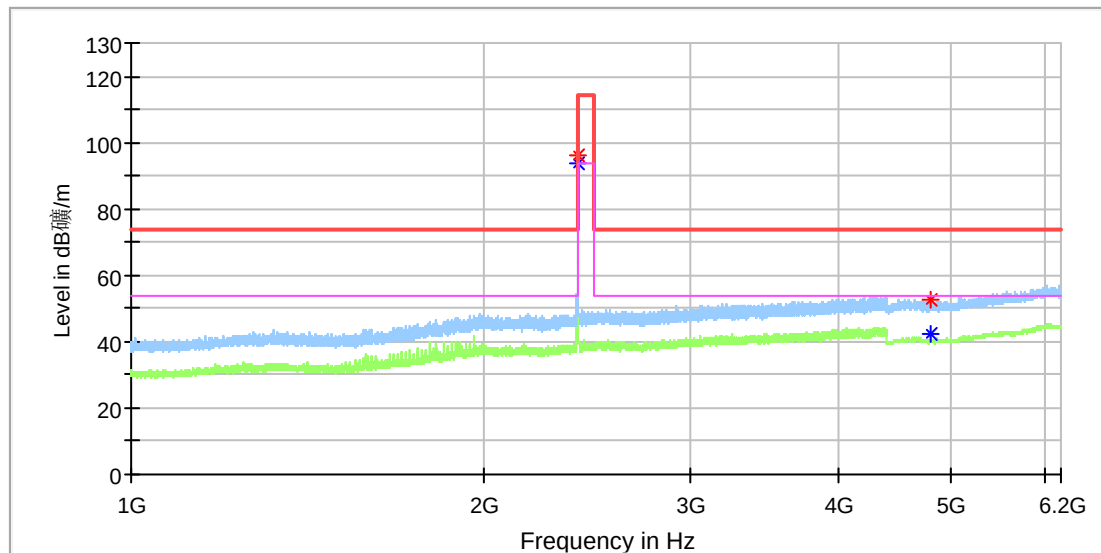


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2401.310000	---	93.61	94.00	0.39	100.0	H	335.0	7.0
2401.650000	96.18	---	114.00	17.82	100.0	H	335.0	7.0
4801.000000	52.34	---	74.00	21.66	100.0	H	0.0	11.8
4803.500000	---	42.51	54.00	11.49	100.0	H	97.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

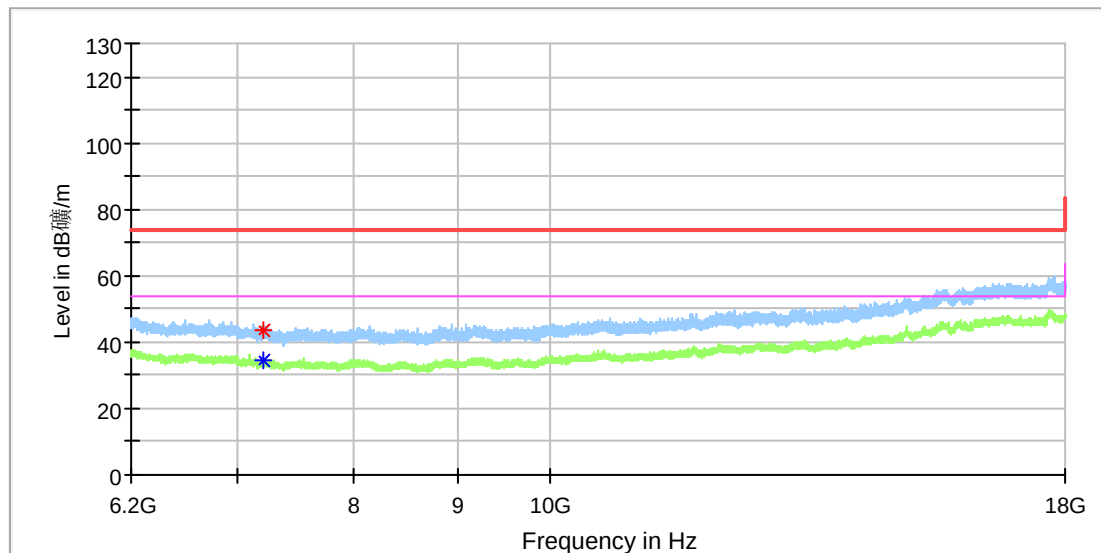


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7202.016667	---	34.32	54.00	19.68	100.0	H	241.0	8.8
7208.408333	43.70	---	74.00	30.30	100.0	H	283.0	8.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

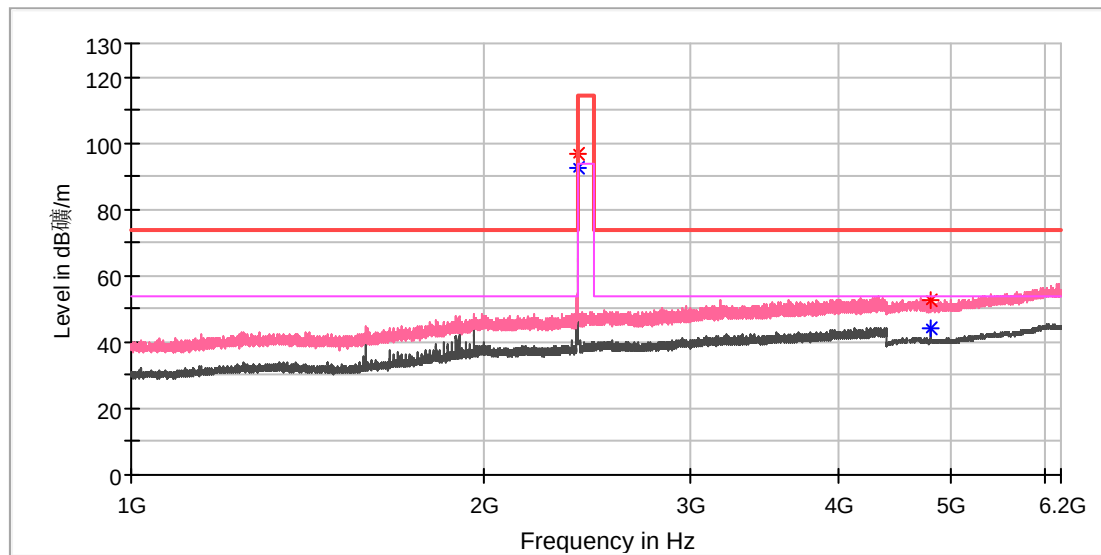


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2401.140000	---	92.38	94.00	1.62	100.0	V	259.0	7.0
2401.650000	96.89	---	114.00	17.11	100.0	V	259.0	7.0
4803.500000	52.75	---	74.00	21.25	100.0	V	87.0	11.8
4803.500000	---	44.30	54.00	9.70	100.0	V	87.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

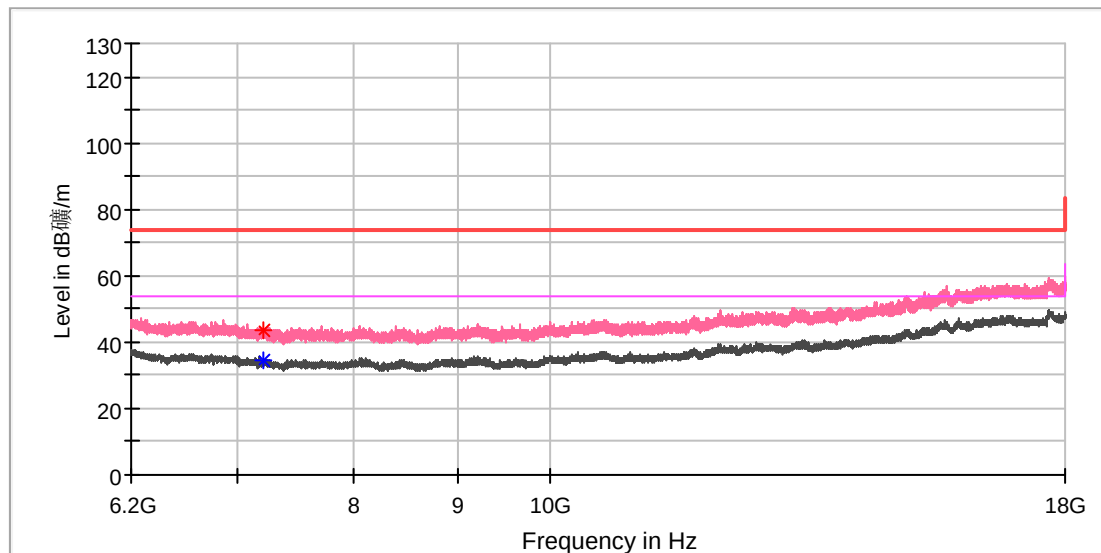


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7206.441667	43.83	---	74.00	30.17	100.0	V	294.0	8.8
7207.916667	---	34.34	54.00	19.66	100.0	V	179.0	8.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Mid channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

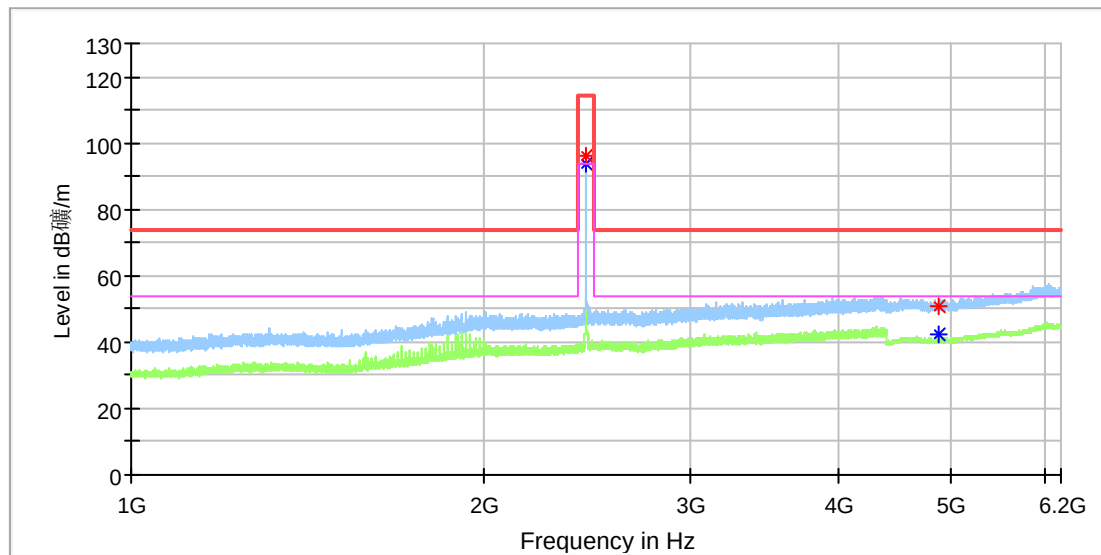


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2441.770000	96.11	---	114.00	17.89	100.0	H	158.0	7.4
2442.110000	---	93.57	94.00	0.43	100.0	H	158.0	7.4
4883.000000	51.03	---	74.00	22.98	100.0	H	209.0	11.8
4883.500000	---	42.04	54.00	11.96	100.0	H	198.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Mid channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

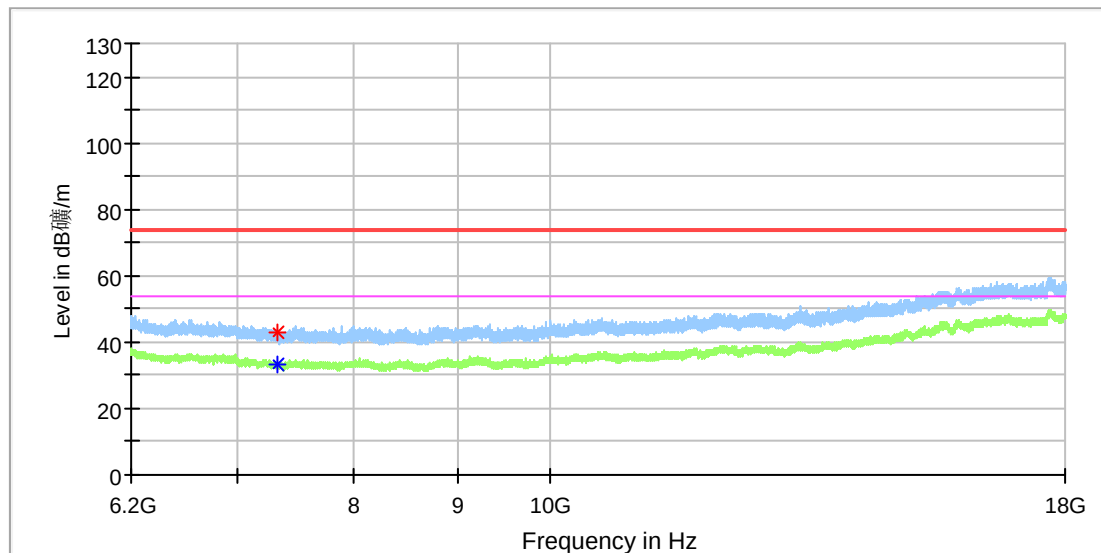


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7324.933333	---	33.14	54.00	20.86	100.0	H	77.0	8.2
7326.408333	42.66	---	74.00	31.34	100.0	H	289.0	8.1

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Mid channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

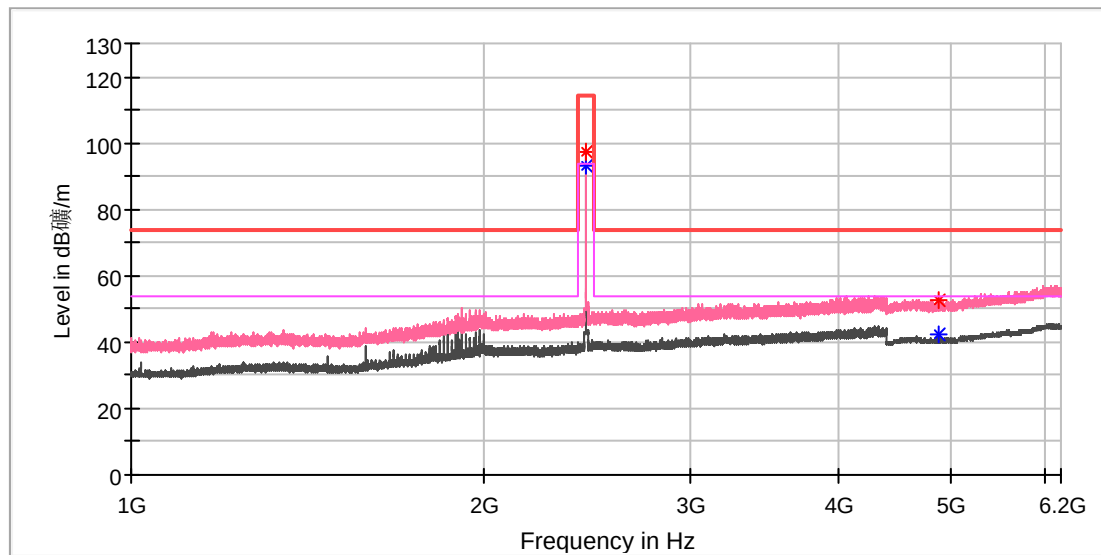


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2441.770000	97.57	---	114.00	16.43	100.0	V	257.0	7.4
2442.280000	---	93.41	94.00	0.59	100.0	V	257.0	7.4
4883.000000	---	42.52	54.00	11.48	100.0	V	259.0	11.8
4883.500000	52.32	---	74.00	21.68	100.0	V	207.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Mid channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

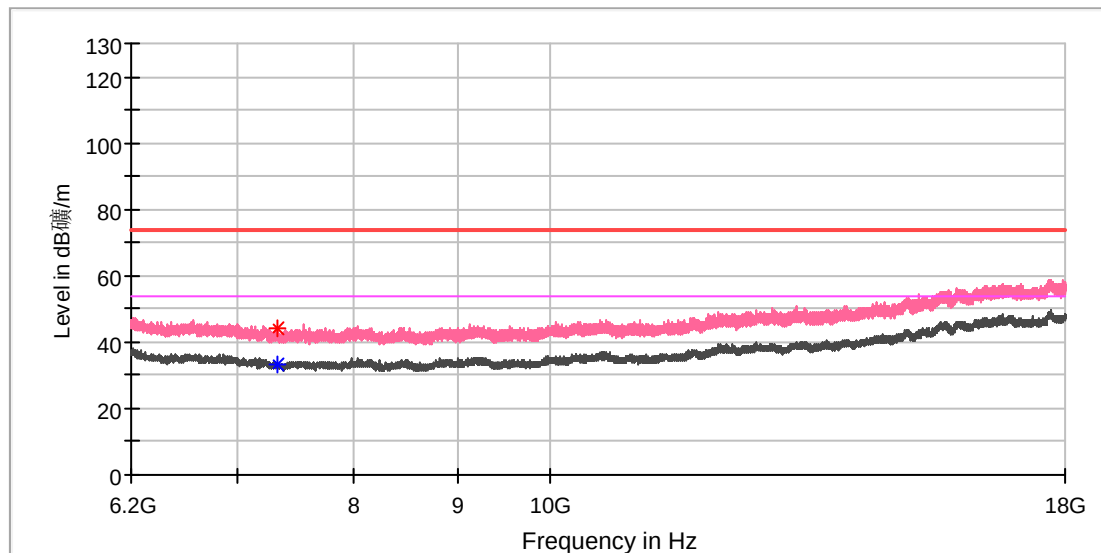


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7327.391667	---	33.50	54.00	20.50	100.0	V	270.0	8.1
7328.375000	44.39	---	74.00	29.61	100.0	V	75.0	8.1

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

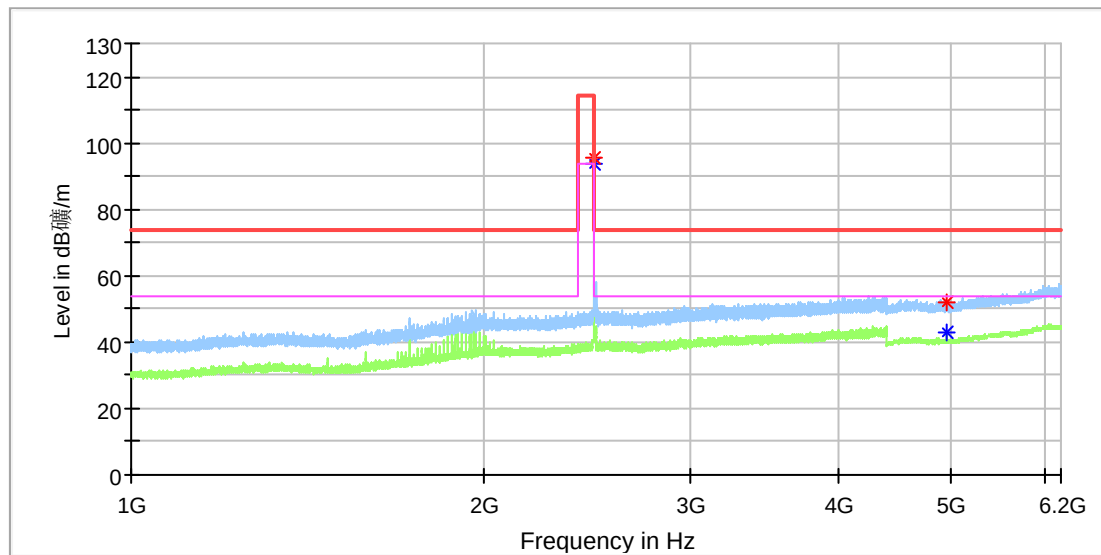


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2481.550000	95.48	---	114.00	18.52	100.0	H	260.0	7.4
2482.060000	---	93.52	94.00	0.48	100.0	H	260.0	7.4
4963.000000	---	42.68	54.00	11.32	100.0	H	94.0	11.8
4963.500000	52.23	---	74.00	21.77	100.0	H	117.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

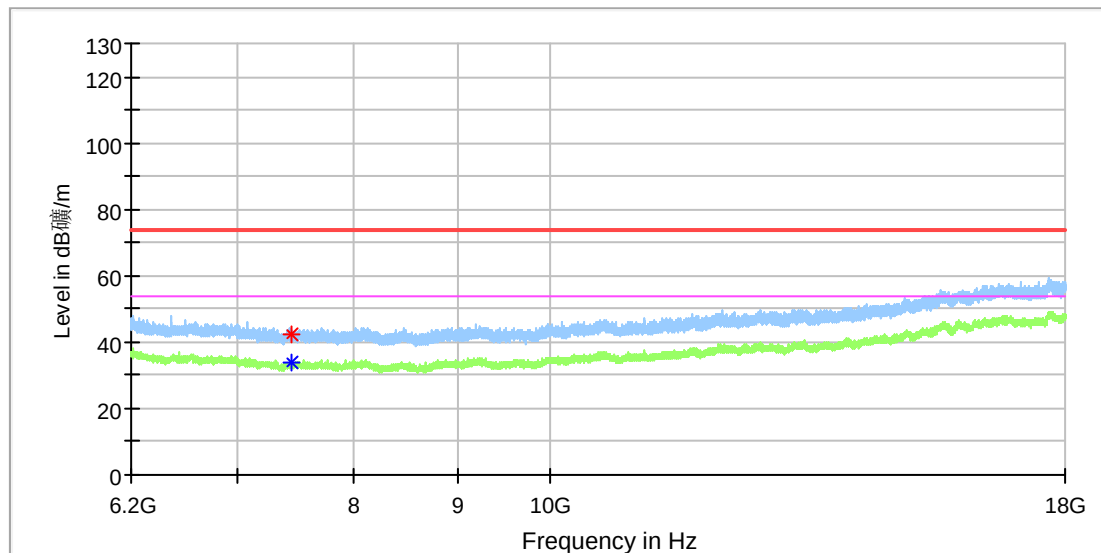


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7445.883333	42.48	---	74.00	31.52	100.0	H	0.0	8.5
7446.866667	---	33.71	54.00	20.29	100.0	H	222.0	8.5

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

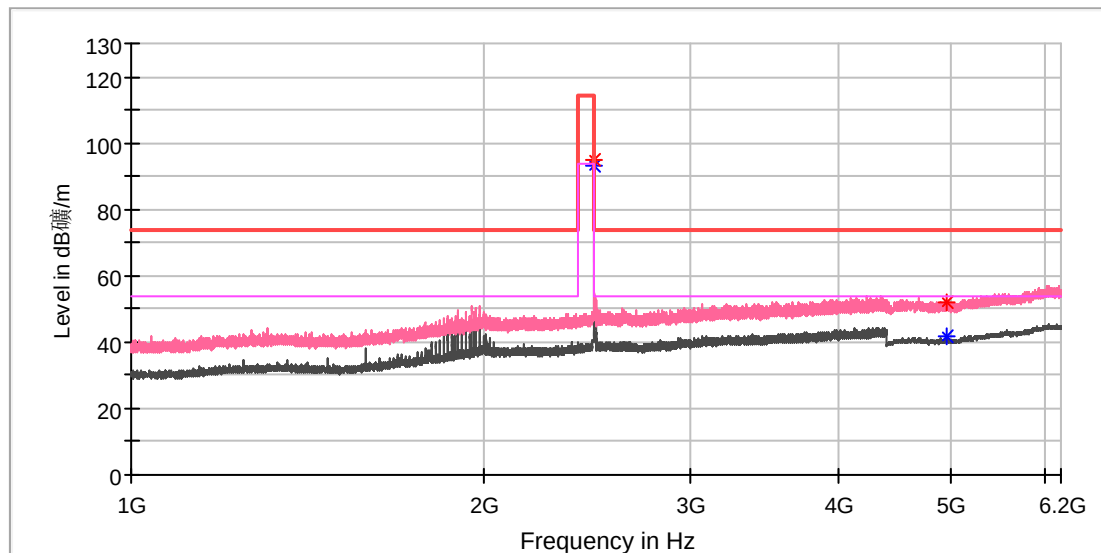


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2481.210000	---	93.04	94.00	0.96	100.0	V	250.0	7.4
2481.550000	94.85	---	114.00	19.15	100.0	V	250.0	7.4
4960.000000	51.79	---	74.00	22.21	100.0	V	60.0	11.8
4963.500000	---	41.99	54.00	12.01	100.0	V	9.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

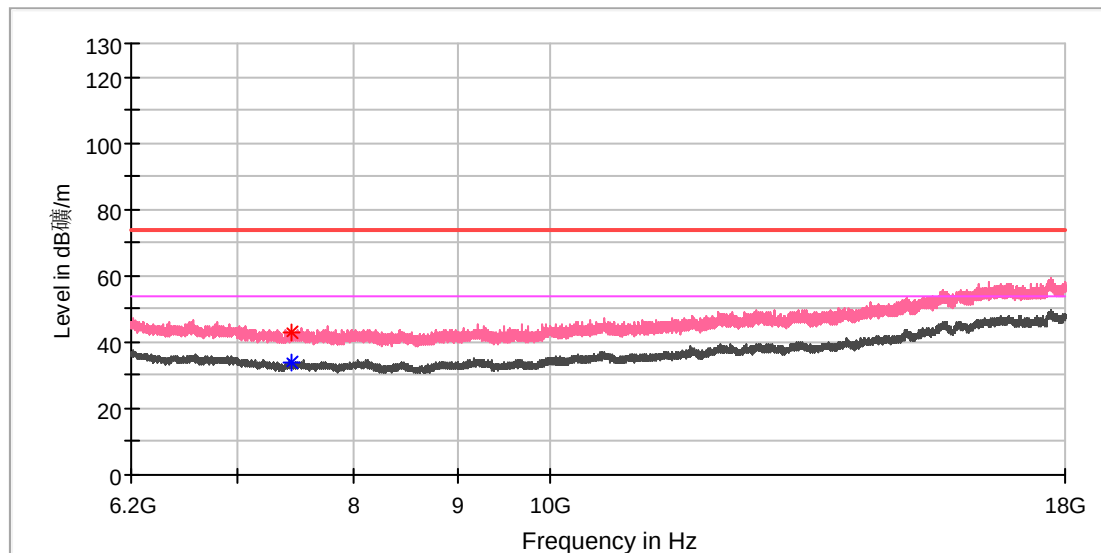


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7442.933333	42.97	---	74.00	31.03	100.0	V	284.0	8.4
7444.900000	---	33.60	54.00	20.40	100.0	V	200.0	8.5

For miha bodytec II (project title:MBT2.1):

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec II (project title:MBT2.1)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

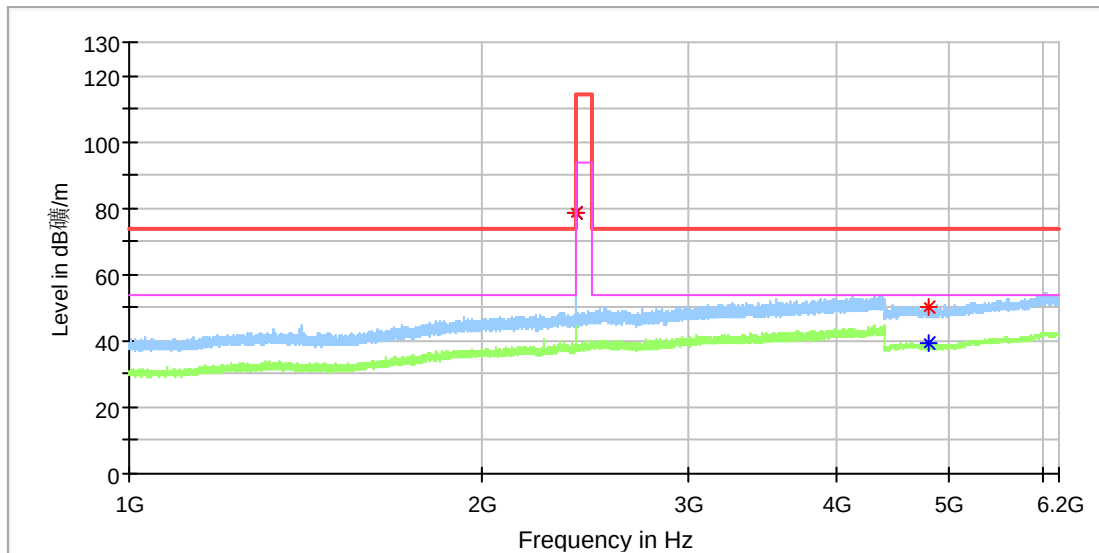


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2401.820000	78.90	---	114.00	35.10	100.0	H	303.0	7.0
2401.820000	---	78.78	94.00	15.22	100.0	H	303.0	7.0
4803.500000	---	39.26	54.00	14.74	100.0	H	236.0	11.8
4806.000000	50.04	---	74.00	23.96	100.0	H	236.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec II (project title:MBT2.1)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

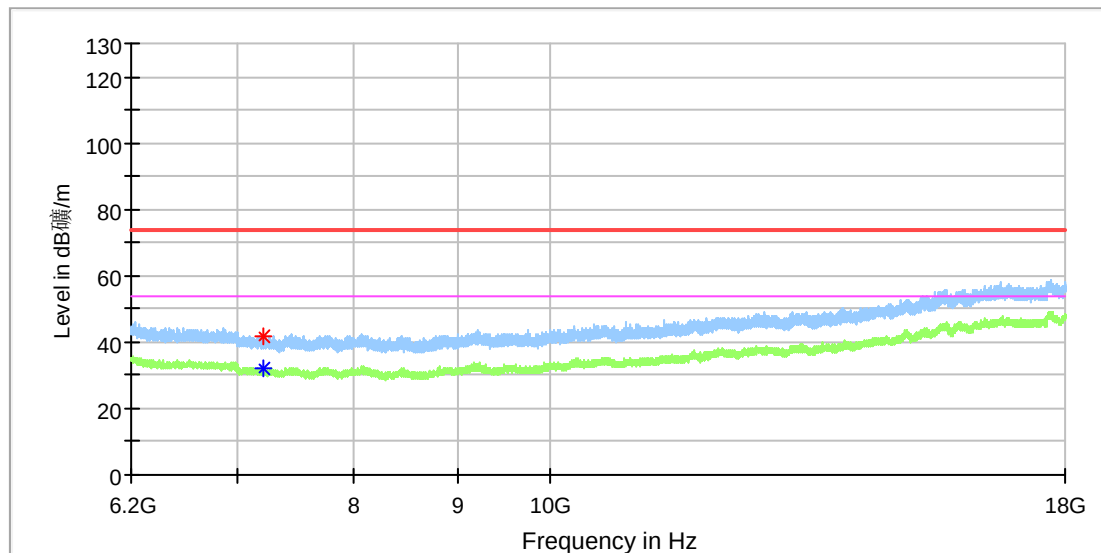


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7204.966667	41.62	---	74.00	32.38	100.0	H	258.0	8.8
7207.425000	---	31.82	54.00	22.18	100.0	H	132.0	8.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec II (project title:MBT2.1)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

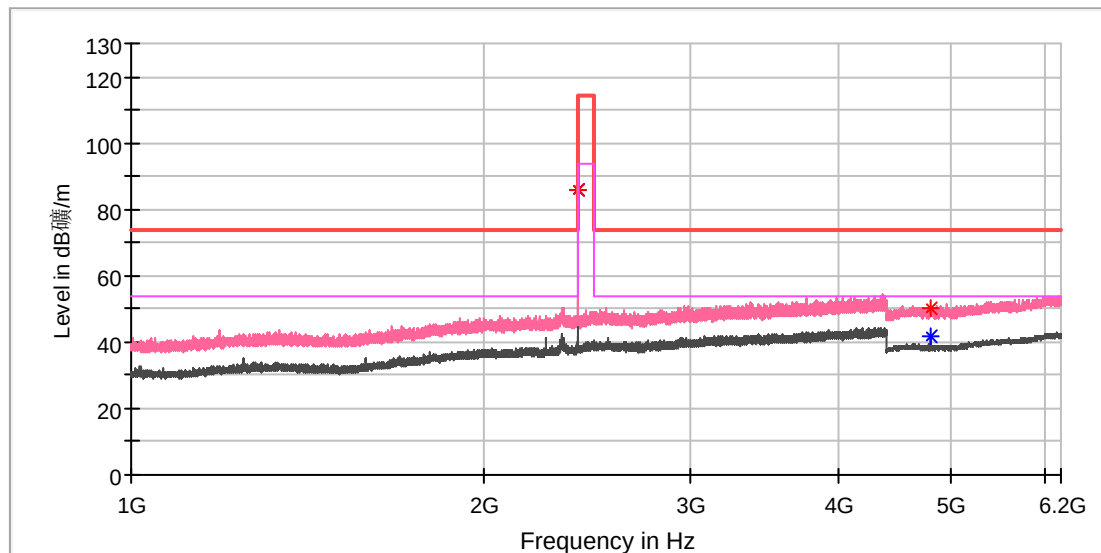


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2401.820000	85.97	---	114.00	28.03	100.0	V	320.0	7.0
2401.820000	---	85.86	94.00	8.14	100.0	V	320.0	7.0
4803.000000	49.95	---	74.00	24.05	100.0	V	259.0	11.8
4803.500000	---	41.80	54.00	12.20	100.0	V	269.0	11.8

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec II (project title:MBT2.1)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

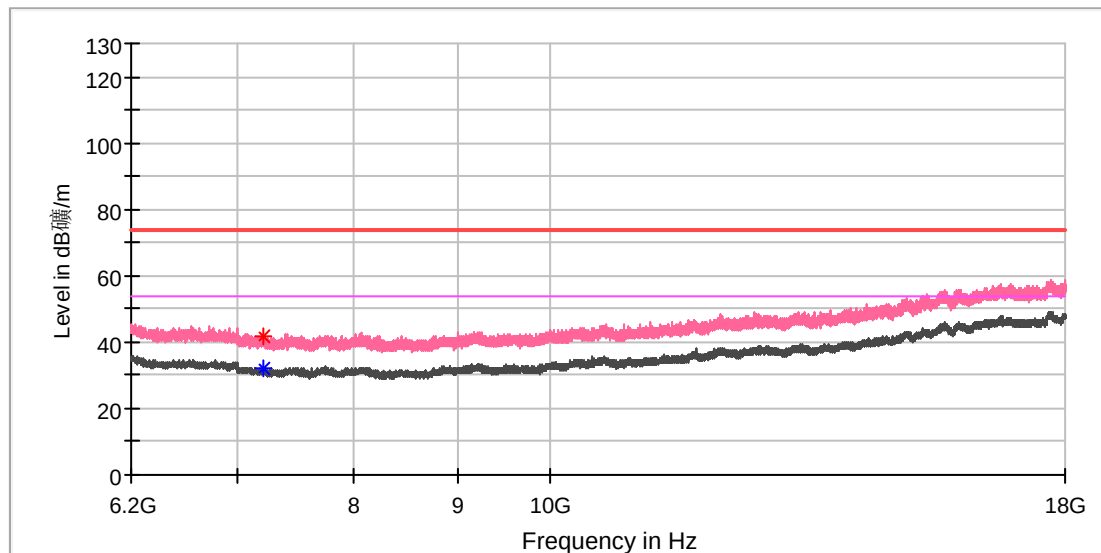

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7203.983333	41.69	---	74.00	32.31	100.0	V	160.0	8.8
7205.458333	---	31.86	54.00	22.14	100.0	V	222.0	8.8

Appendix B.2: Test Results of Band Edge

For miha bodytec m.ove (project title: MBT2.1 light):

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

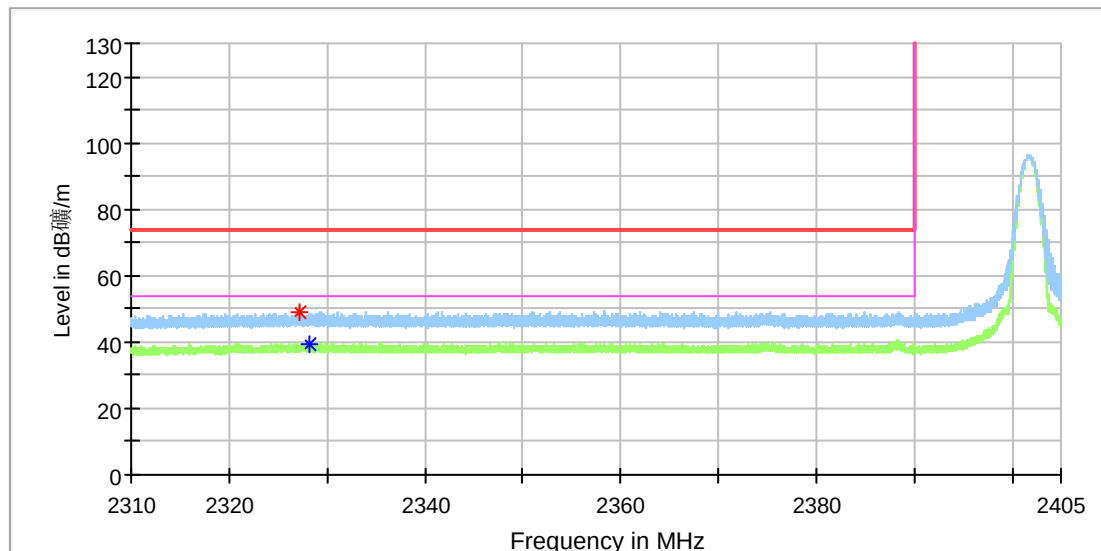


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2327.142750	48.77	---	74.00	25.23	100.0	H	345.0	6.7
2328.145000	---	39.43	54.00	14.57	100.0	H	269.0	6.7

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_Low channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

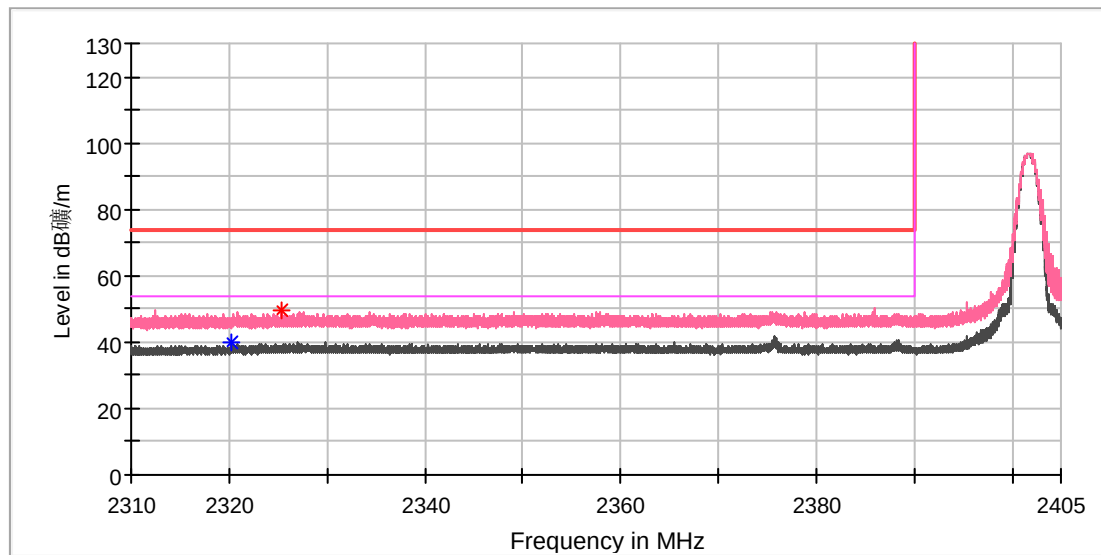


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2320.307500	---	39.61	54.00	14.39	100.0	V	203.0	6.6
2325.447000	49.31	---	74.00	24.69	100.0	V	356.0	6.7

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

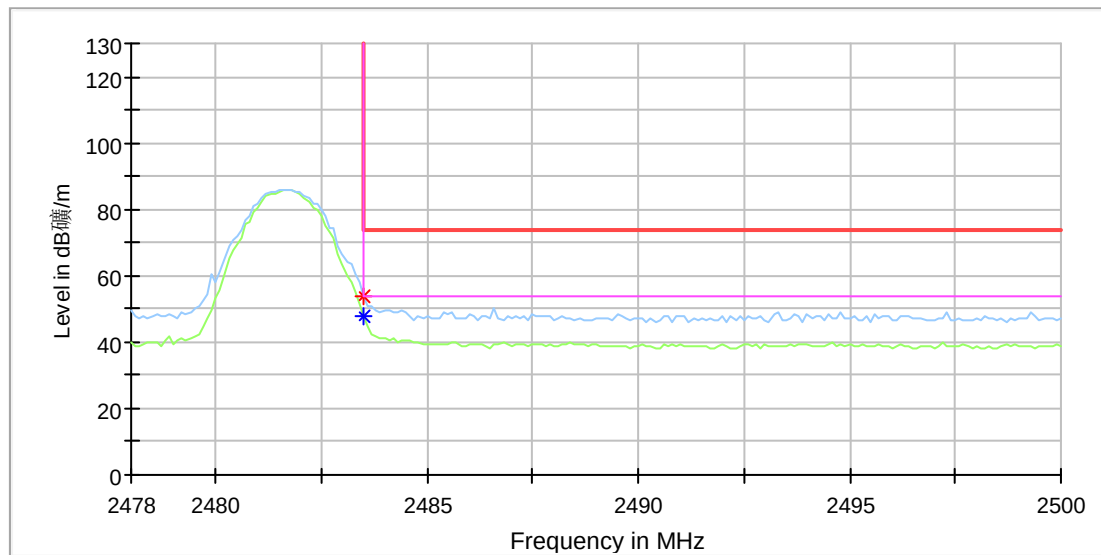


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	53.93	---	74.00	20.07	100.0	H	265.0	7.4
2483.500000	---	47.72	54.00	6.28	100.0	H	265.0	7.4

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

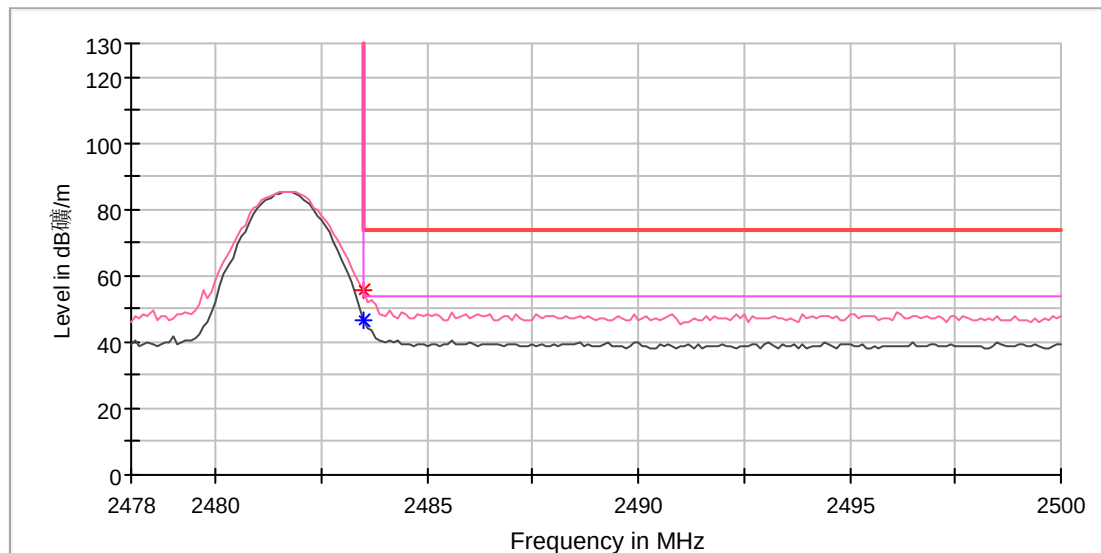


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	---	46.43	54.00	7.57	100.0	V	257.0	7.4
2483.500000	55.38	---	74.00	18.62	100.0	V	257.0	7.4

For miha bodytec II (project title:MBT2.1):

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec II (project title:MBT2.1)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

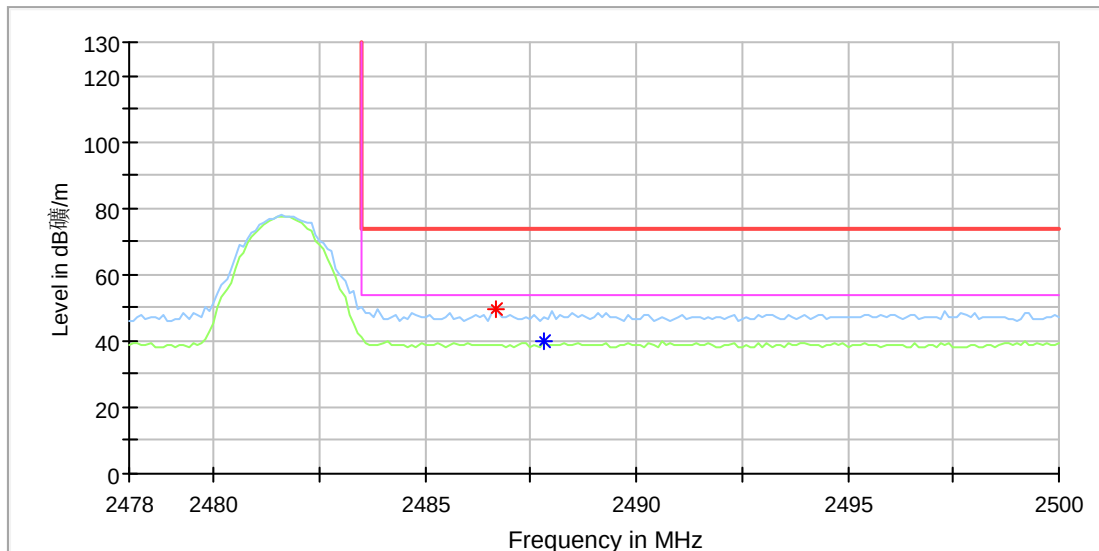


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.700000	49.60	---	74.00	24.40	100.0	H	256.0	7.4
2487.800000	---	39.87	54.00	14.13	100.0	H	295.0	7.4

EUT Information

EUT Name:	EMS Training Device
Model:	miha bodytec II (project title:MBT2.1)
Test Mode:	Tiny_High channel
Test Voltage::	AC 120V, 60Hz
Remark:	Temp 23 Humi:47%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

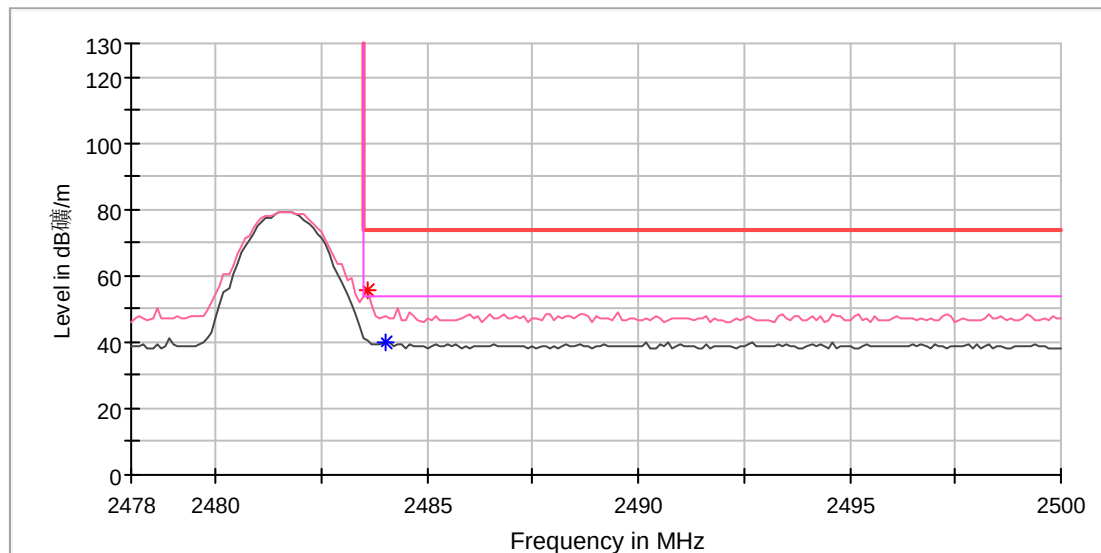


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.600000	55.57	---	74.00	18.43	100.0	V	311.0	7.4
2484.000000	---	39.85	54.00	14.15	100.0	V	0.0	7.4


Appendix B.3: Test Results of 20dB Bandwidth

Low Channel

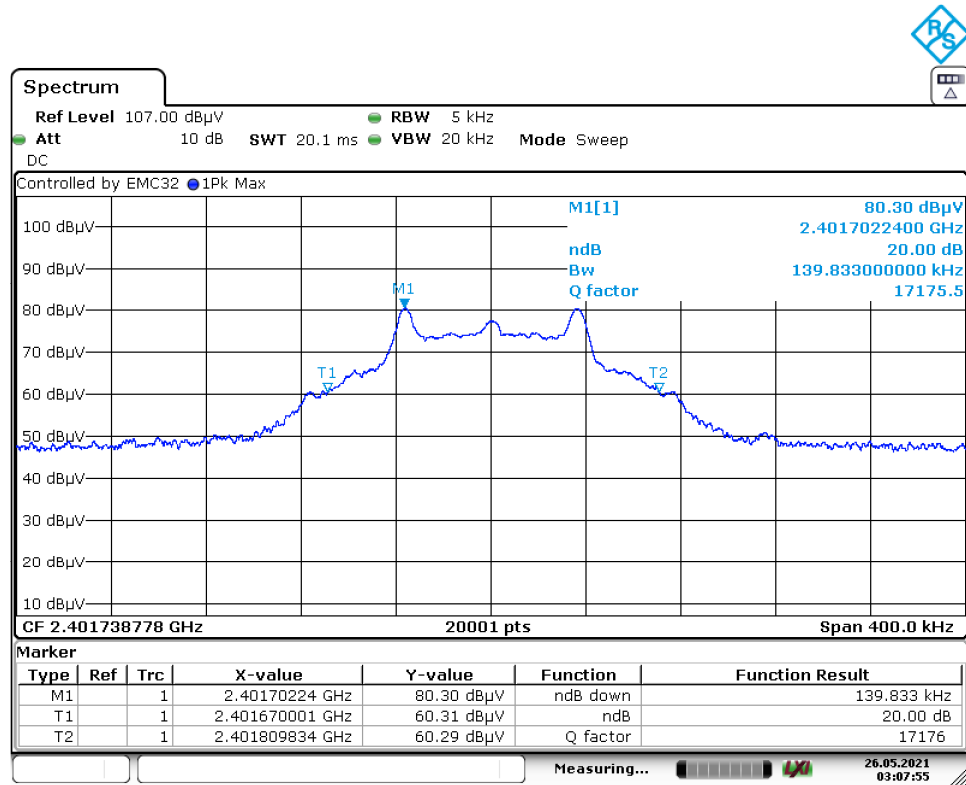


Date: 26.MAY.2021 03:07:55

Middle Channel

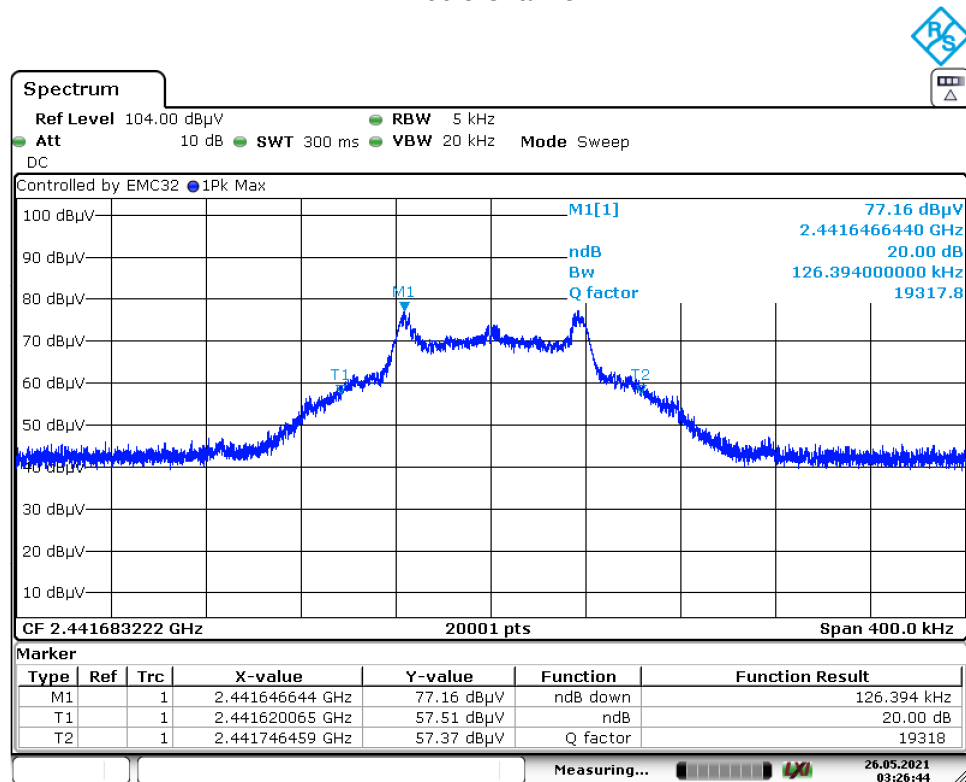

Date: 26.MAY.2021 03:26:44


High Channel

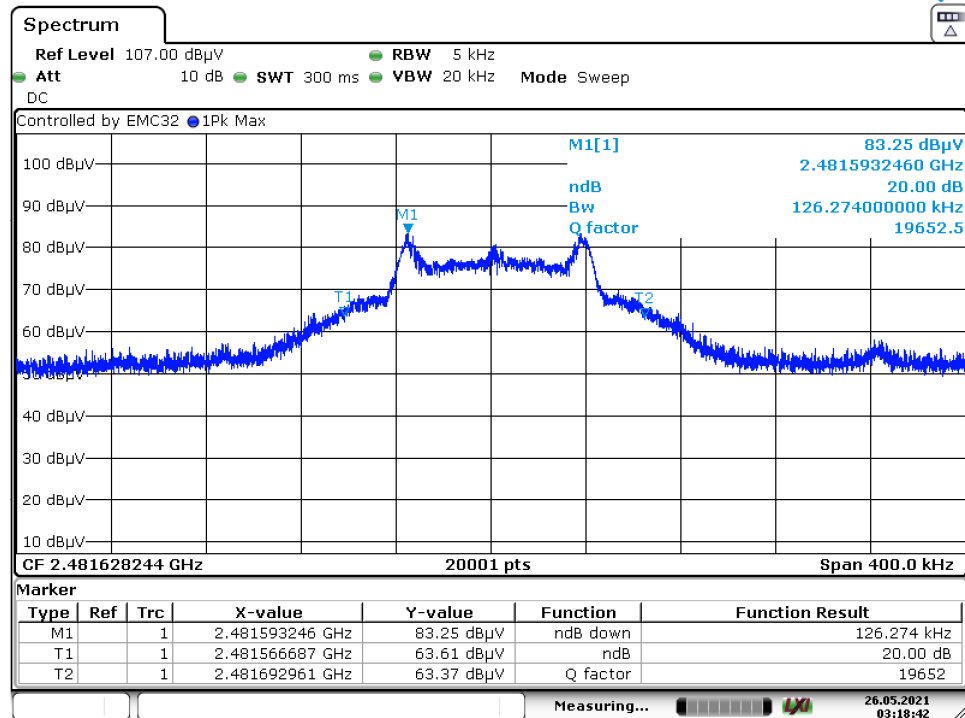


Date: 26.MAY.2021 03:18:42

Appendix B.4: Test Results of 99% Bandwidth


Low Channel

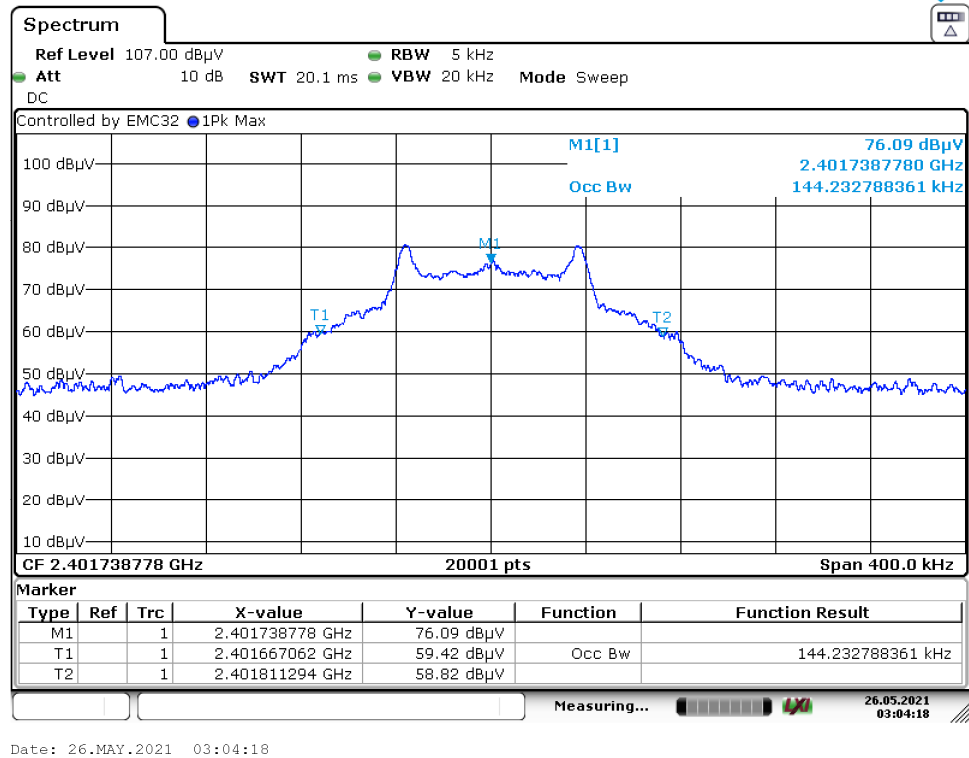

Middle Channel

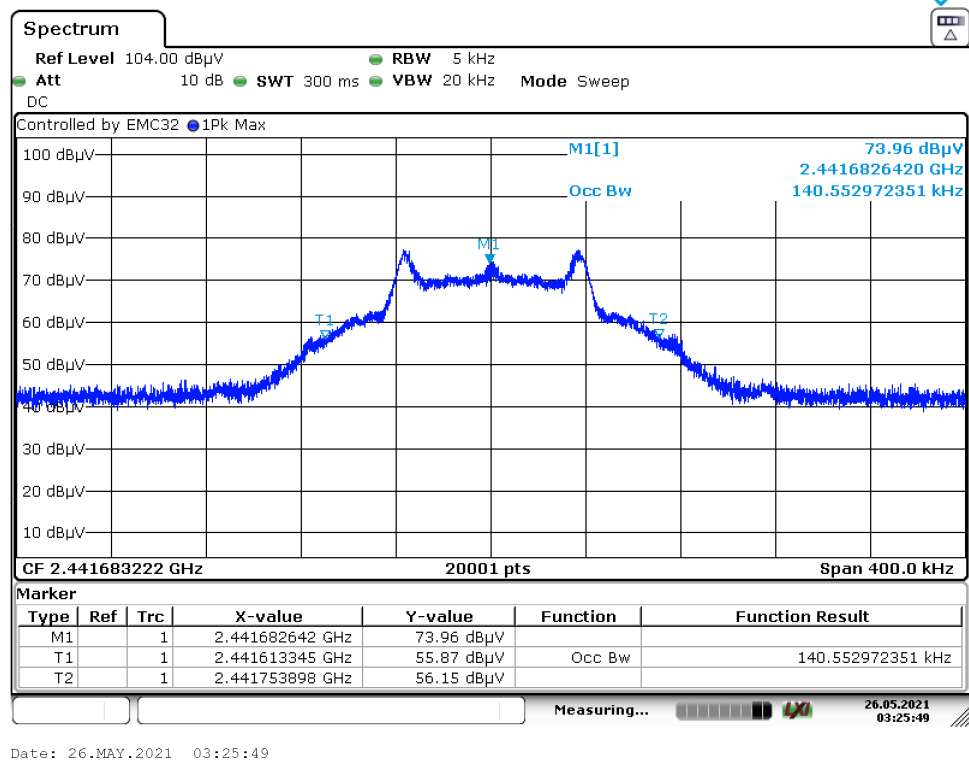

High Channel

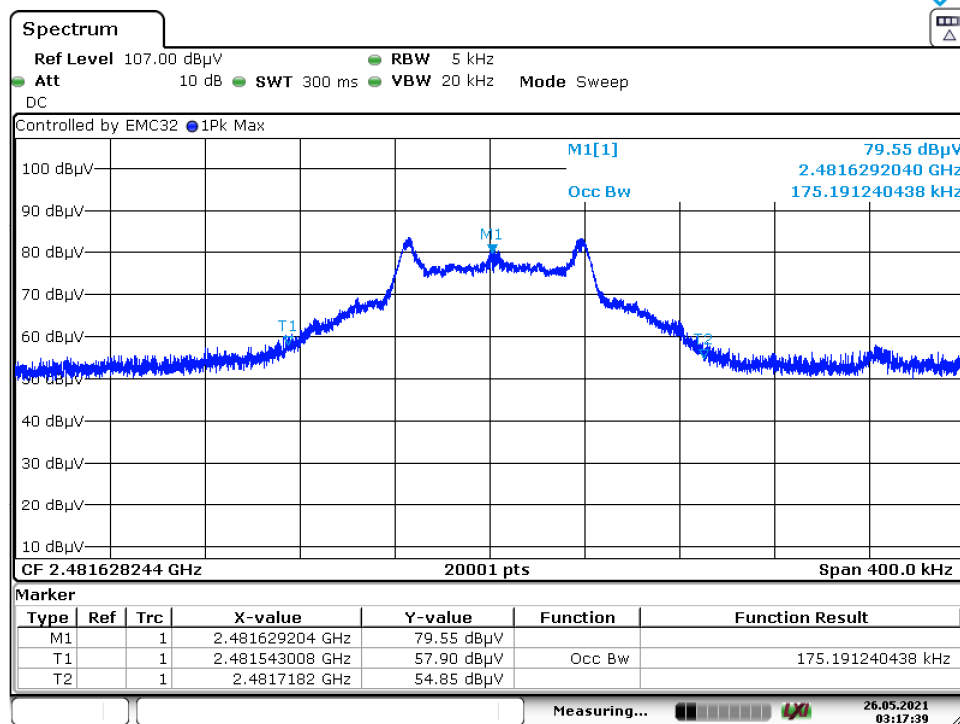


Date: 26.MAY.2021 03:17:39

Appendix B.5: Test Results of Conducted Emissions on AC Mains

EUT Information

EUT Name:	EMS Training Device
Order No.:	168305669 30
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	2.4GTiny link
Test Voltage:	AC 120V/60Hz
Test By:	Shower Dai
Review By:	Gary Chen
Remark:	SR1

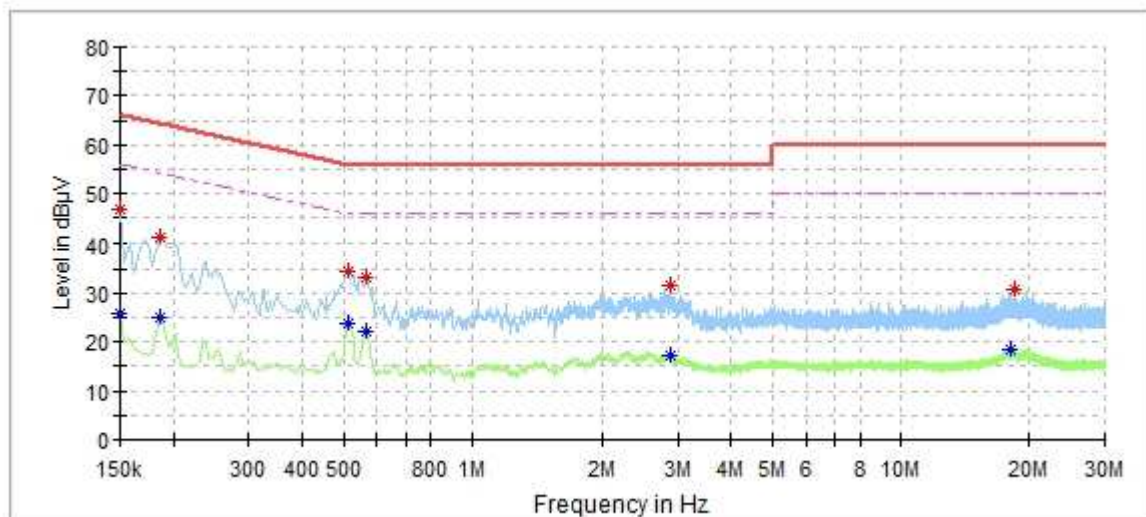


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.150000	---	25.68	56.00	30.32	L1	10
0.150000	46.70	---	66.00	19.30	L1	10
0.186000	---	25.16	54.21	29.05	L1	10
0.186000	41.17	---	64.21	23.05	L1	10
0.512000	34.60	---	56.00	21.40	L1	10
0.516000	---	23.65	46.00	22.35	L1	10
0.564000	---	22.29	46.00	23.71	L1	10
0.568000	33.41	---	56.00	22.59	L1	10
2.880000	31.59	---	56.00	24.41	L1	10
2.892000	---	17.40	46.00	28.60	L1	10
18.076000	---	18.54	50.00	31.46	L1	10
18.400000	30.97	---	60.00	29.03	L1	10

EUT Information

EUT Name:	EMS Training Device
Order No.:	168305669 30
Model:	miha bodytec m.ove (project title: MBT2.1 light)
Test Mode:	2.4G Tiny link
Test Voltage:	AC 120V/60Hz
Test By:	Shower Dai
Review By:	Gary Chen
Remark:	SR1

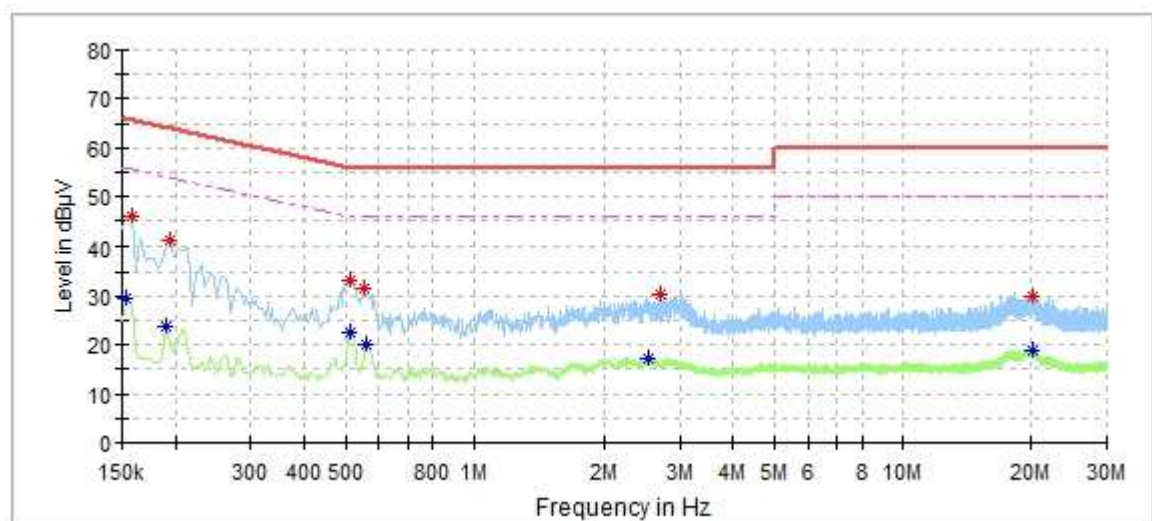

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	---	29.58	55.78	26.20	N	10
0.158000	45.99	---	65.57	19.57	N	10
0.190000	---	23.94	54.04	30.10	N	10
0.194000	40.84	---	63.86	23.02	N	10
0.512000	---	22.41	46.00	23.59	N	10
0.512000	33.38	---	56.00	22.62	N	10
0.552000	31.64	---	56.00	24.36	N	10
0.560000	---	19.90	46.00	26.10	N	10
2.544000	---	17.03	46.00	28.97	N	10
2.708000	30.51	---	56.00	25.49	N	10
20.132000	29.88	---	60.00	30.12	N	11
20.152000	---	18.71	50.00	31.29	N	11