



Appendix B: Test Results of Bluetooth Low Energy

APPENDIX B: TEST RESULTS OF BLUETOOTH LOW ENERGY	1
APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX B.2: TEST RESULTS OF 6dB BANDWIDTH.....	5
APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH.....	8
APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH.....	11
<i>Band Edge</i>	<i>11</i>
<i>Conducted Spurious Emission</i>	<i>13</i>
APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	20
<i>30 MHz - 1GHz</i>	<i>20</i>
<i>1GHz - 18GHz.....</i>	<i>22</i>
APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	34
APPENDIX B.7: TEST RESULTS OF CONDUCTED EMISSION	38

Appendix B.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-11.96	≤8.00	PASS
		2440	-12.05	≤8.00	PASS
		2480	-12.36	≤8.00	PASS
BLE_2M	Ant1	2402	-14.59	≤8.00	PASS
		2440	-14.45	≤8.00	PASS
		2480	-14.68	≤8.00	PASS

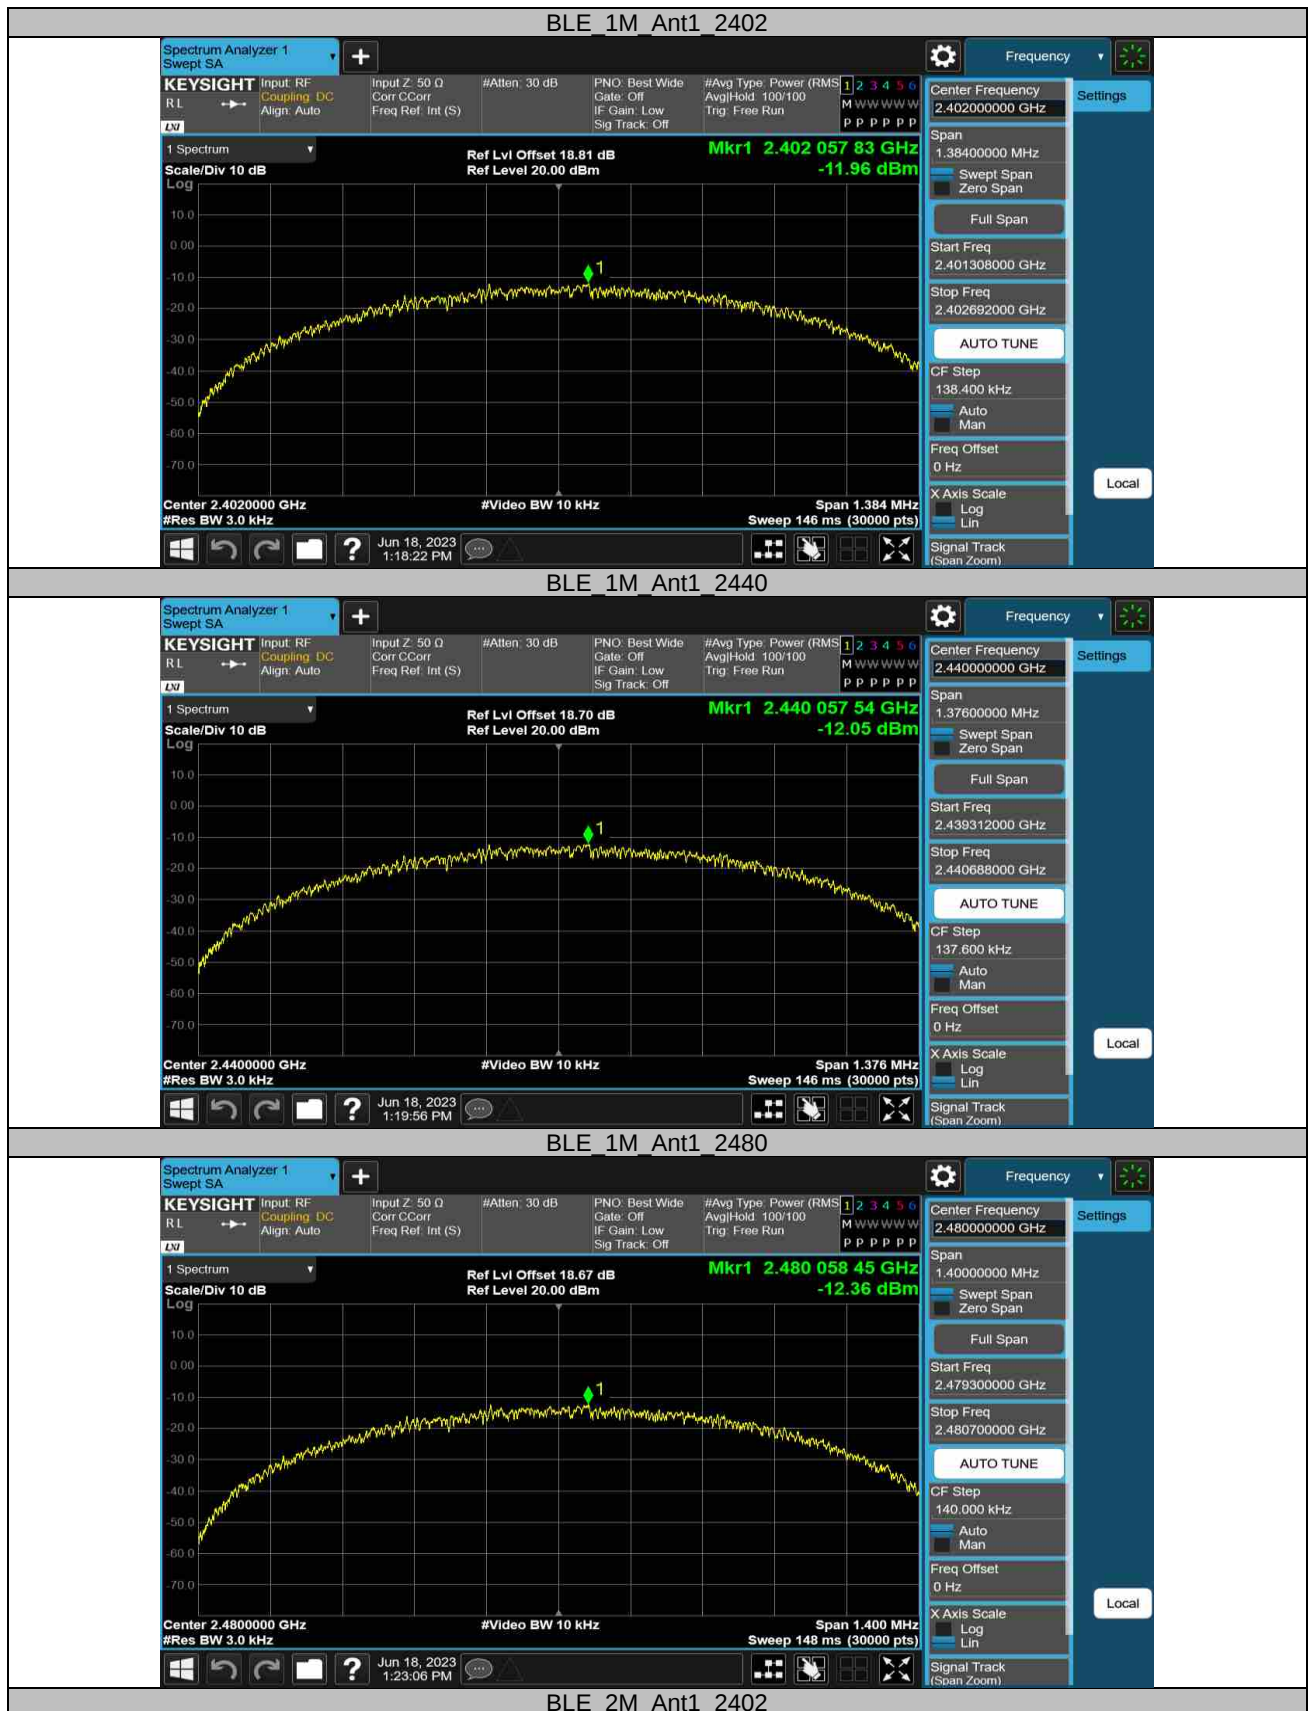

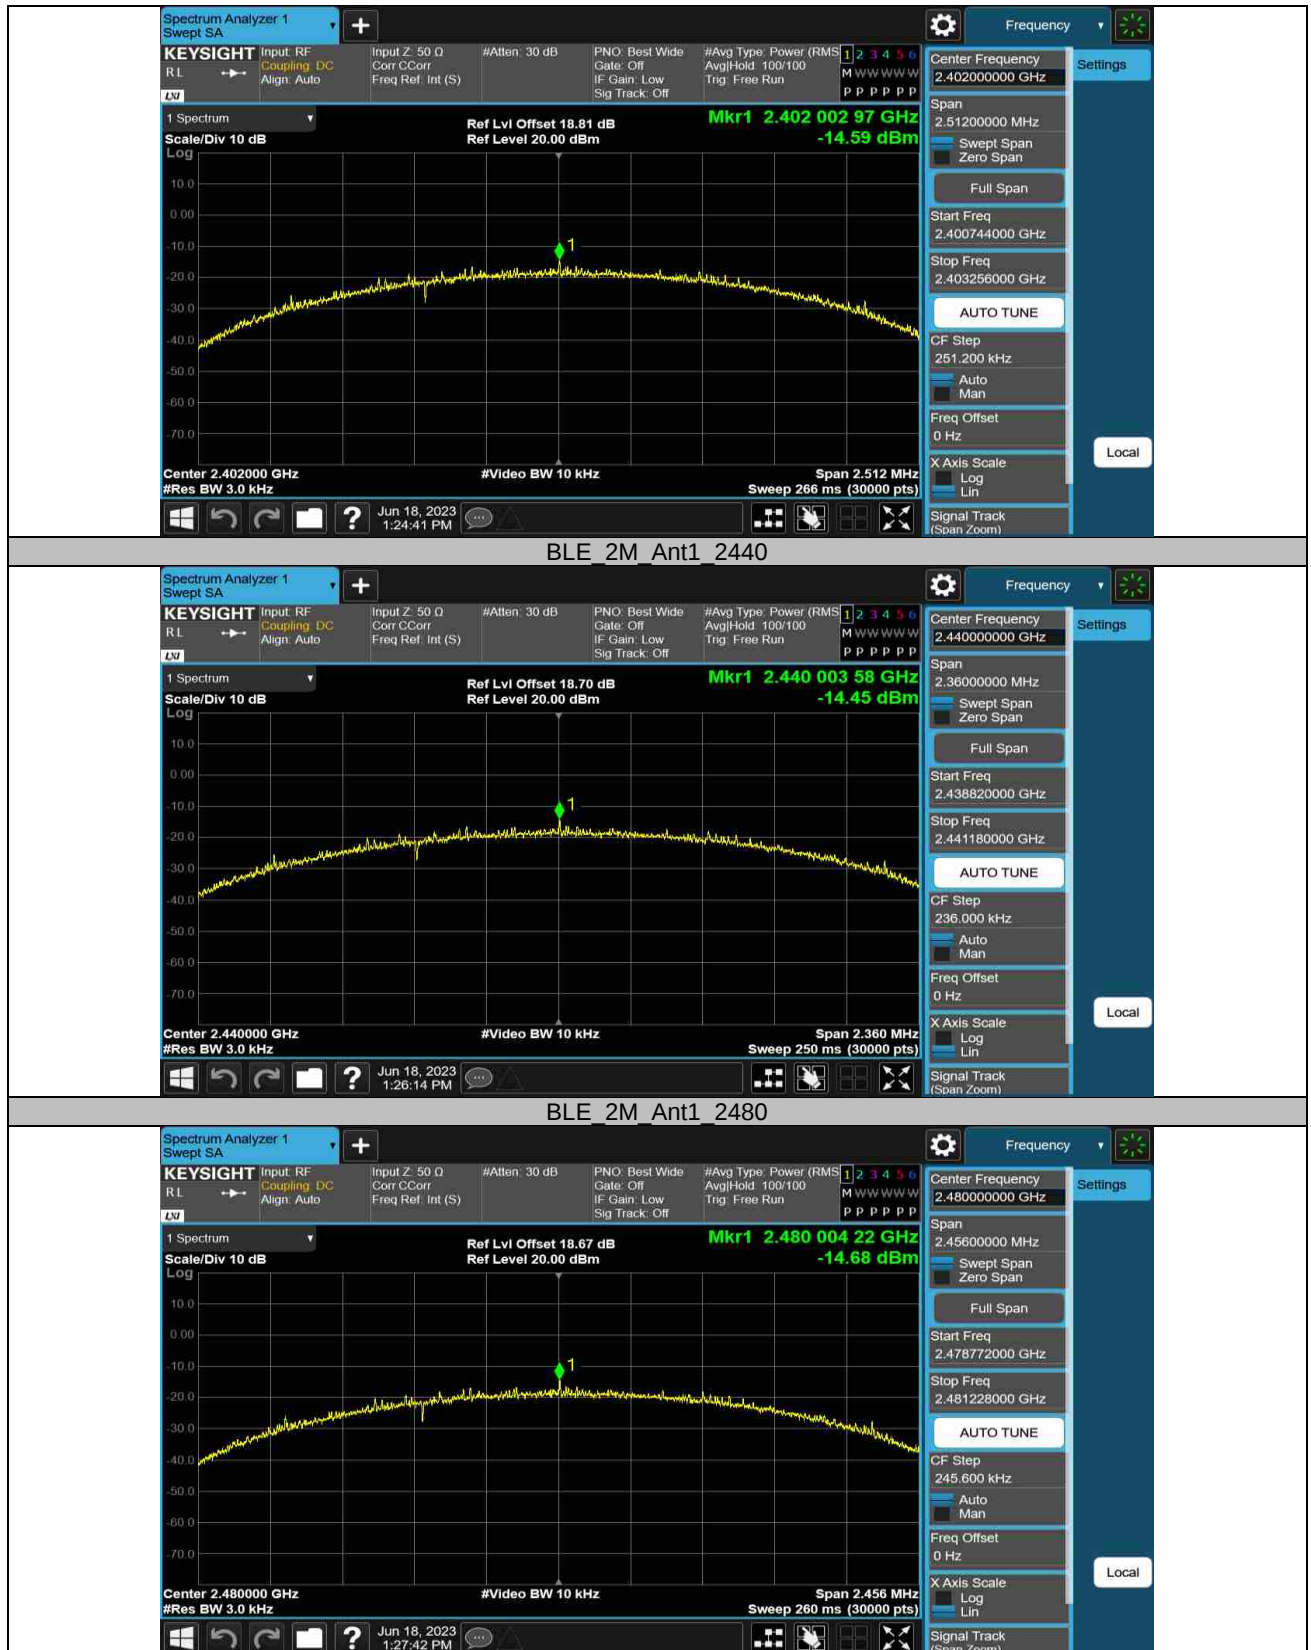


Appendix B.2: Test Results of 6dB Bandwidth


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.692	2401.696	2402.388	0.5	PASS
		2440	0.688	2439.696	2440.384	0.5	PASS
		2480	0.700	2479.676	2480.376	0.5	PASS
BLE_2M	Ant1	2402	1.256	2401.372	2402.628	0.5	PASS
		2440	1.180	2439.428	2440.608	0.5	PASS
		2480	1.228	2479.392	2480.620	0.5	PASS



Appendix B.3: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0595	2401.5208	2402.5803	---	PASS
		2440	1.0610	2439.5157	2440.5767	---	PASS
		2480	1.0689	2479.5137	2480.5826	---	PASS
BLE_2M	Ant1	2402	2.0867	2400.9950	2403.0817	---	PASS
		2440	2.0715	2439.0084	2441.0799	---	PASS
		2480	2.0773	2479.0023	2481.0796	---	PASS

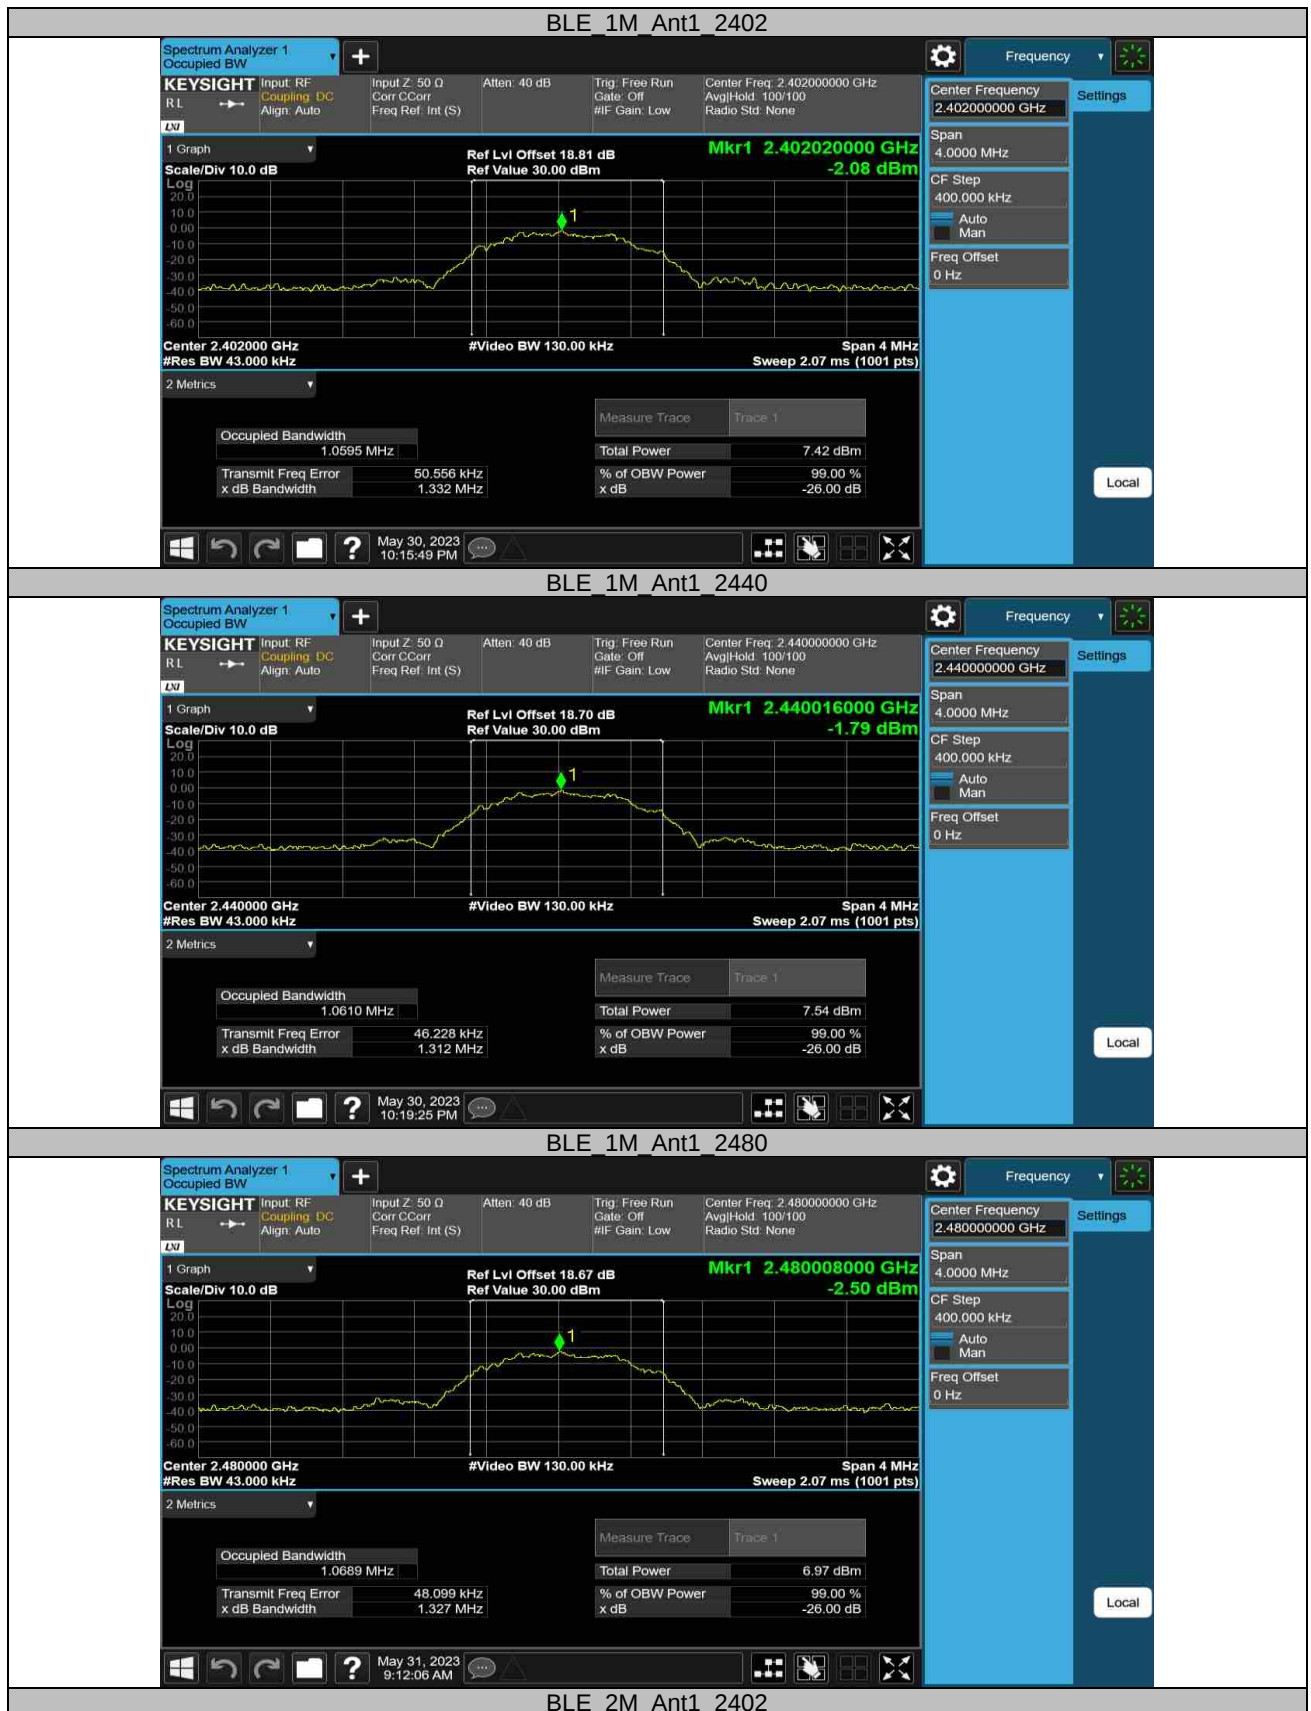

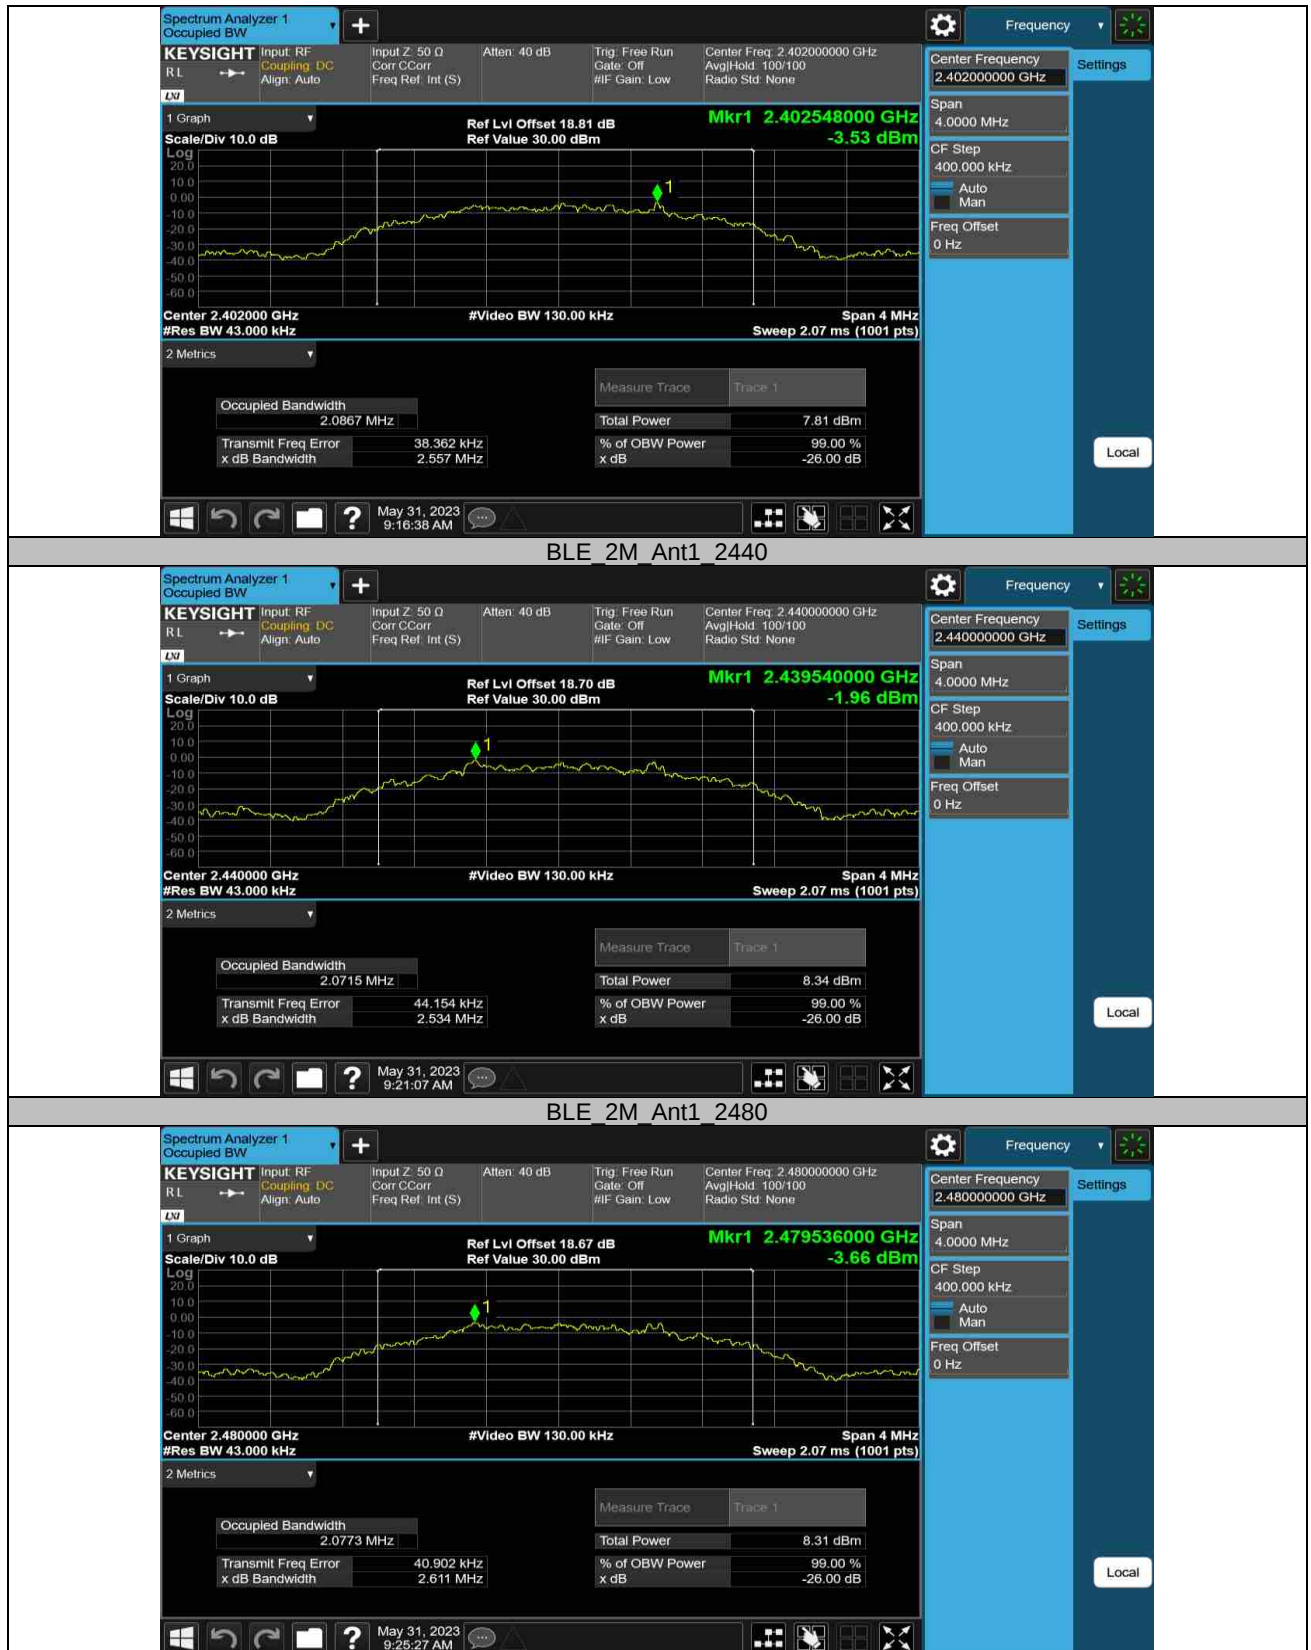

Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	0.27	-44.15	≤-19.73	PASS
		High	2480	0.14	-45.21	≤-19.36	PASS
BLE_2M	Ant1	Low	2402	-0.68	-32.42	≤-20.68	PASS
		High	2480	-0.69	-45.07	≤-20.69	PASS

BLE 1M Ant1 Low 2402



BLE 1M Ant1 High 2480



BLE 2M Ant1 Low 2402



Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-0.52	-0.52	---	PASS
			30~1000	-0.52	-40.57	≤-20.52	PASS
			1000~26500	-0.52	-31.67	≤-20.52	PASS
		2440	Reference	-0.40	-0.40	---	PASS
			30~1000	-0.40	-40.79	≤-20.4	PASS
			1000~26500	-0.40	-31.34	≤-20.4	PASS
		2480	Reference	-0.50	-0.50	---	PASS
			30~1000	-0.50	-42.24	≤-20.5	PASS
			1000~26500	-0.50	-33.37	≤-20.5	PASS
BLE_2M	Ant1	2402	Reference	-1.53	-1.53	---	PASS
			30~1000	-1.53	-41.54	≤-21.53	PASS
			1000~26500	-1.53	-33.16	≤-21.53	PASS
		2440	Reference	-2.38	-2.38	---	PASS
			30~1000	-2.38	-41.54	≤-22.38	PASS
			1000~26500	-2.38	-32.53	≤-22.38	PASS
		2480	Reference	-2.00	-2.00	---	PASS
			30~1000	-2.00	-40.35	≤-22	PASS
			1000~26500	-2.00	-32.16	≤-22	PASS






BLE 1M Ant1 2440 30~1000



BLE 1M Ant1 2440 1000~26500

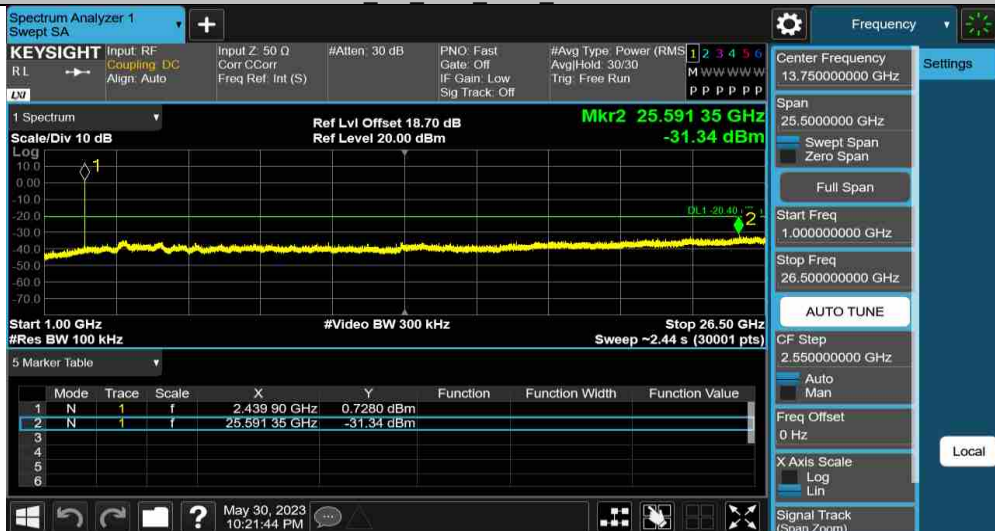

BLE 1M Ant1 2480 0~Reference



BLE 1M Ant1 2480 30~1000





BLE 1M Ant1 2480 1000~26500



BLE 2M Ant1 2402 0~Reference



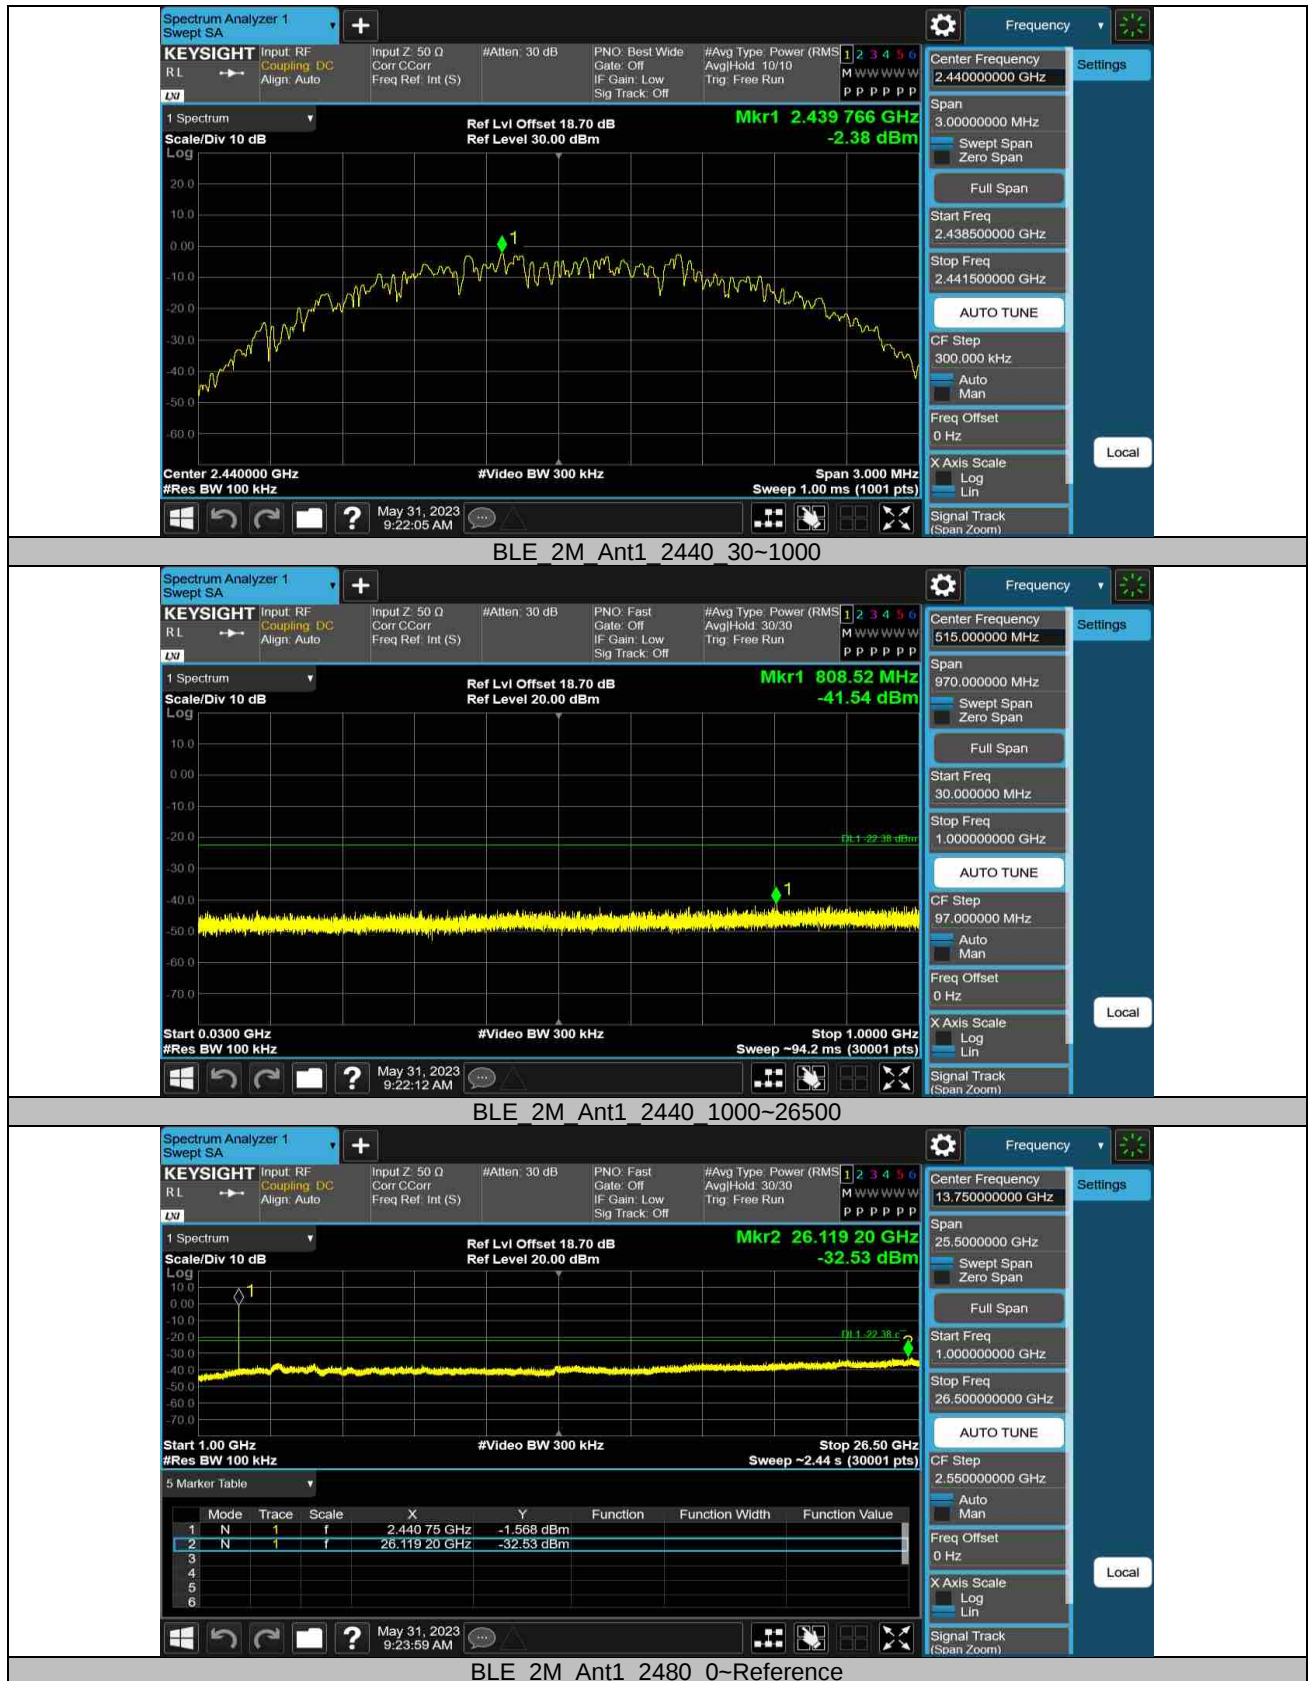

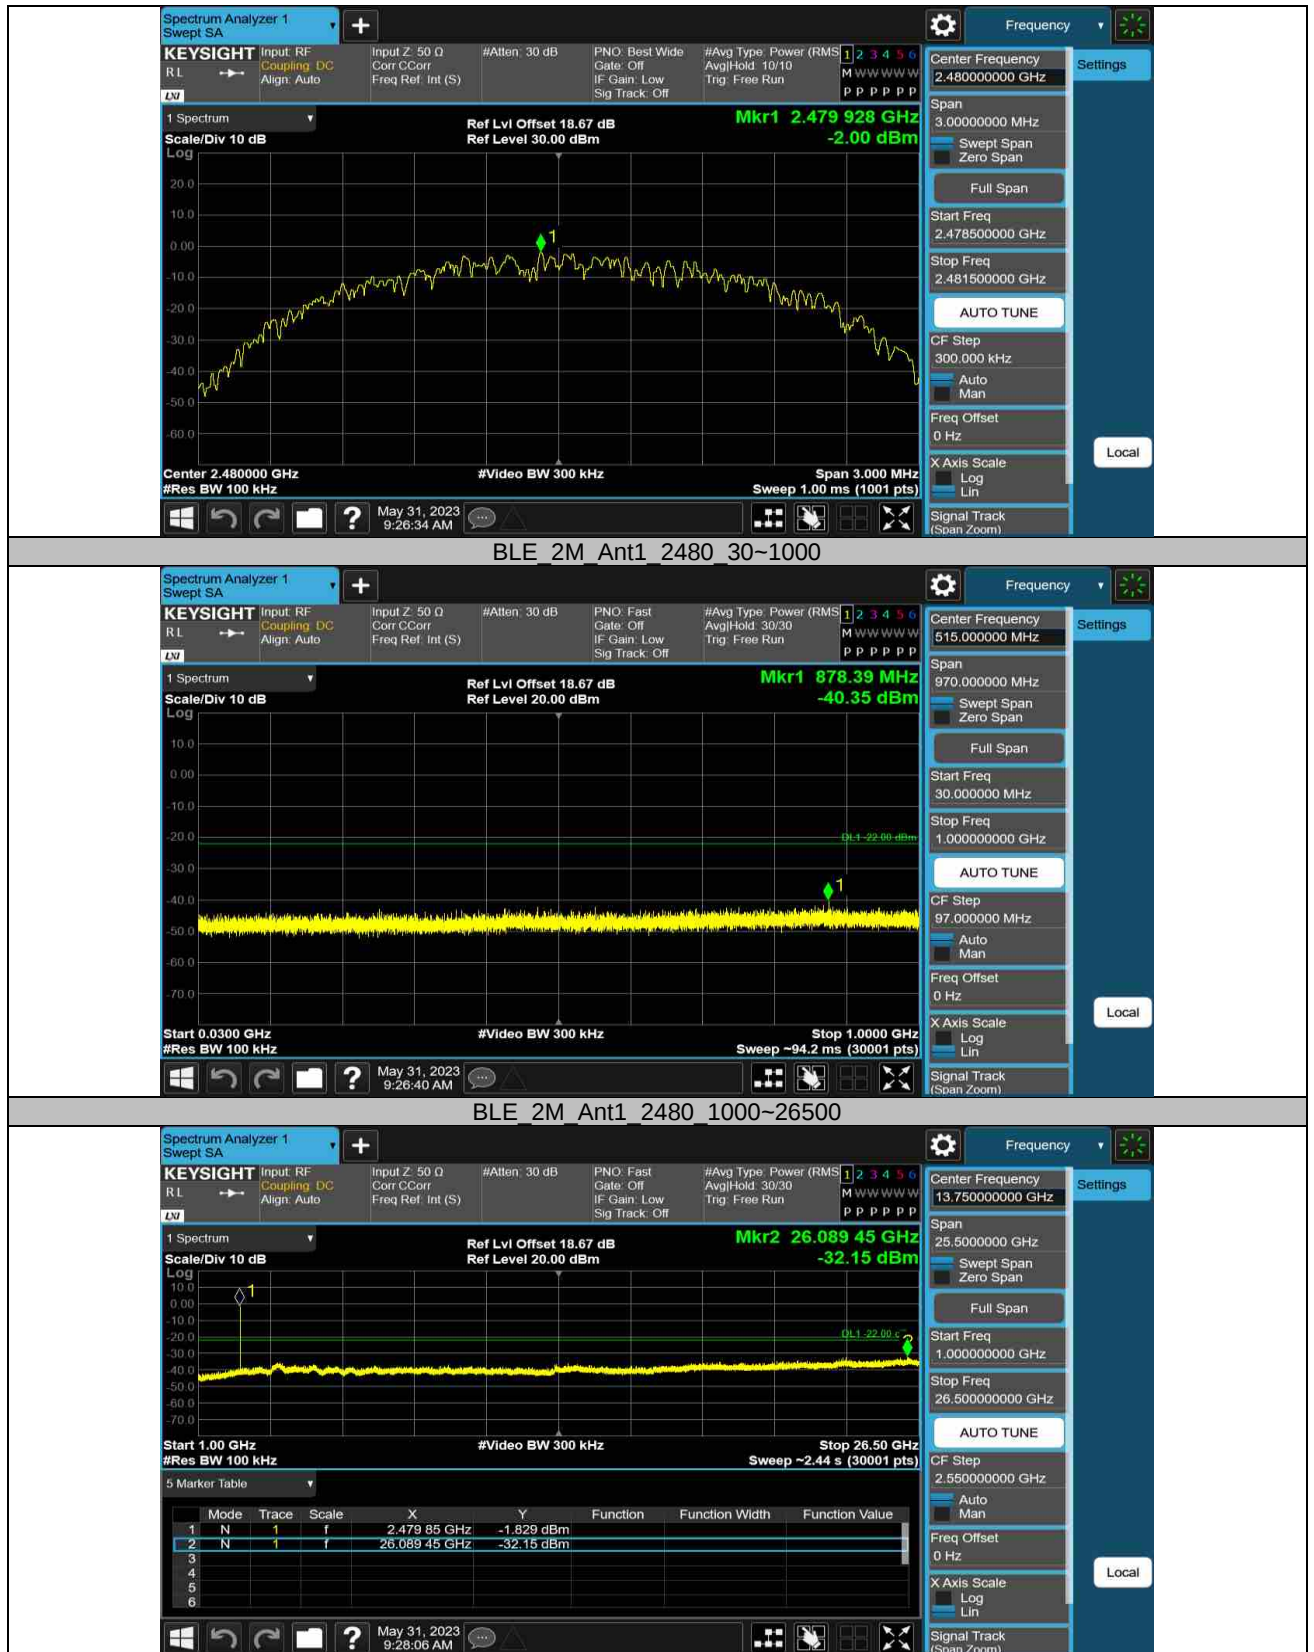

Appendix B.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	OPS-8195A
Model:	OPS-8195A-4R64S
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168426958/A003490153-001
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

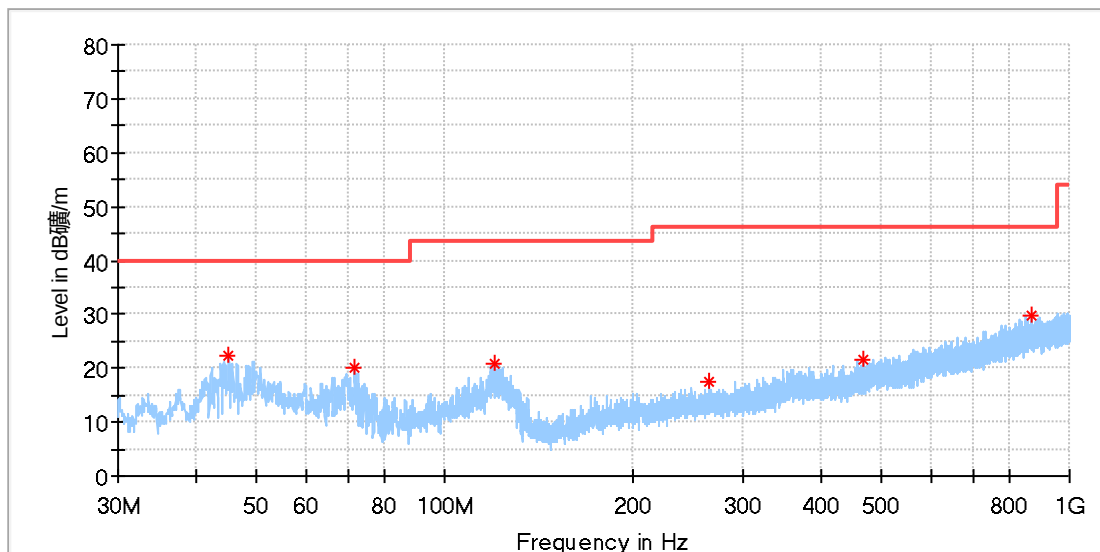

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.132000	22.49	40.00	17.51	100.0	H	76.0	-18.8
71.807000	20.05	40.00	19.95	100.0	H	256.0	-22.4
119.822000	20.97	43.50	22.53	100.0	H	243.0	-20.8
264.400500	17.37	46.00	28.63	100.0	H	324.0	-17.0
469.216000	21.69	46.00	24.31	100.0	H	202.0	-12.4
871.572000	29.82	46.00	16.18	100.0	H	119.0	-5.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPS-8195A
Model:	OPS-8195A-4R64S
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168426958/A003490153-001
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

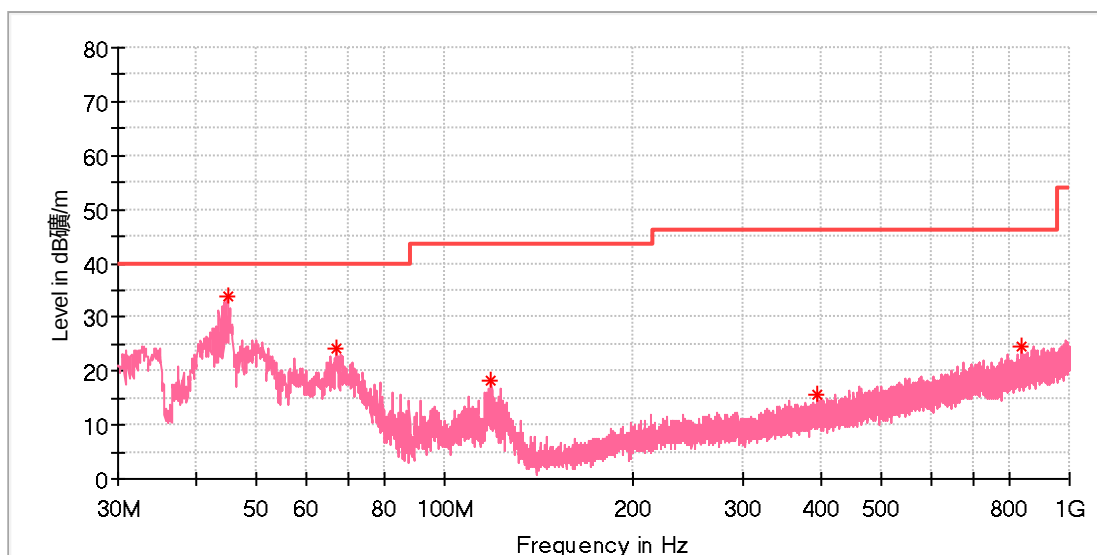

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.885769	33.71	40.00	6.29	100.0	V	356.0	-19.2
67.158462	24.32	40.00	15.69	100.0	V	168.0	-21.2
118.792308	18.19	43.50	25.31	100.0	V	196.0	-20.8
393.153077	15.46	46.00	30.54	100.0	V	152.0	-14.3
835.995385	24.58	46.00	21.42	100.0	V	263.0	-6.1

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	OPS-8195A
Model:	OPS-8195A-4R64S
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168426958/A003490153-001
Test Voltage::	120V/60Hz
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

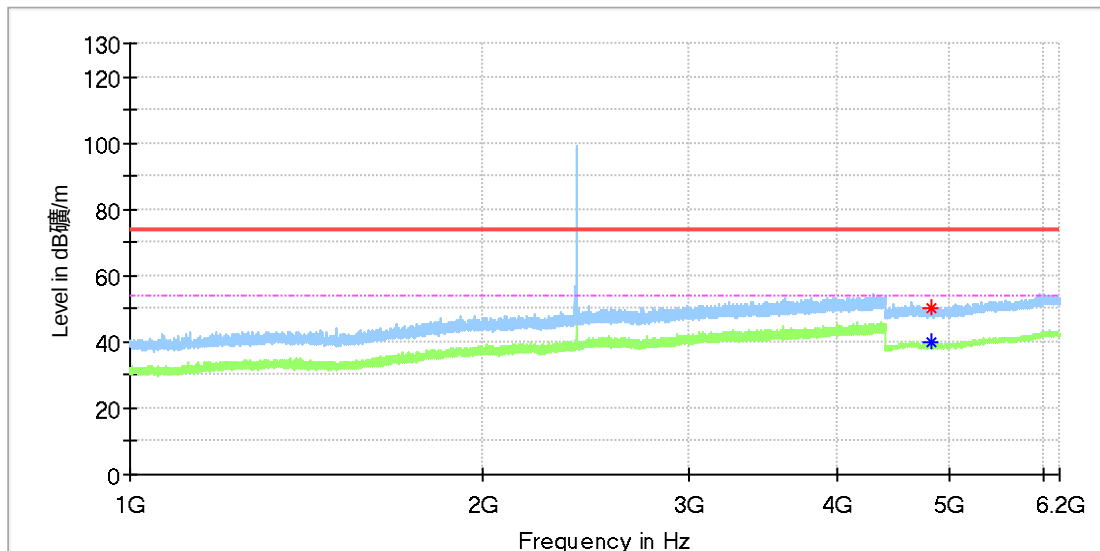

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4815.500000	---	39.71	54.00	14.29	150.0	H	143.0	11.8
4818.500000	49.99	---	74.00	24.01	150.0	H	143.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

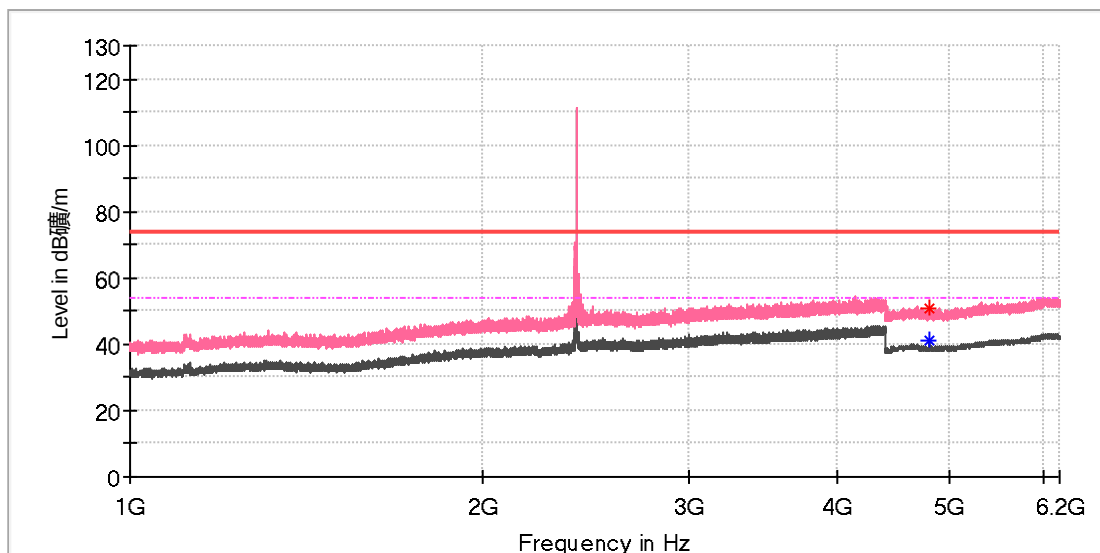

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	---	41.24	54.00	12.76	150.0	V	242.0	11.8
4806.000000	50.57	---	74.00	23.43	150.0	V	75.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

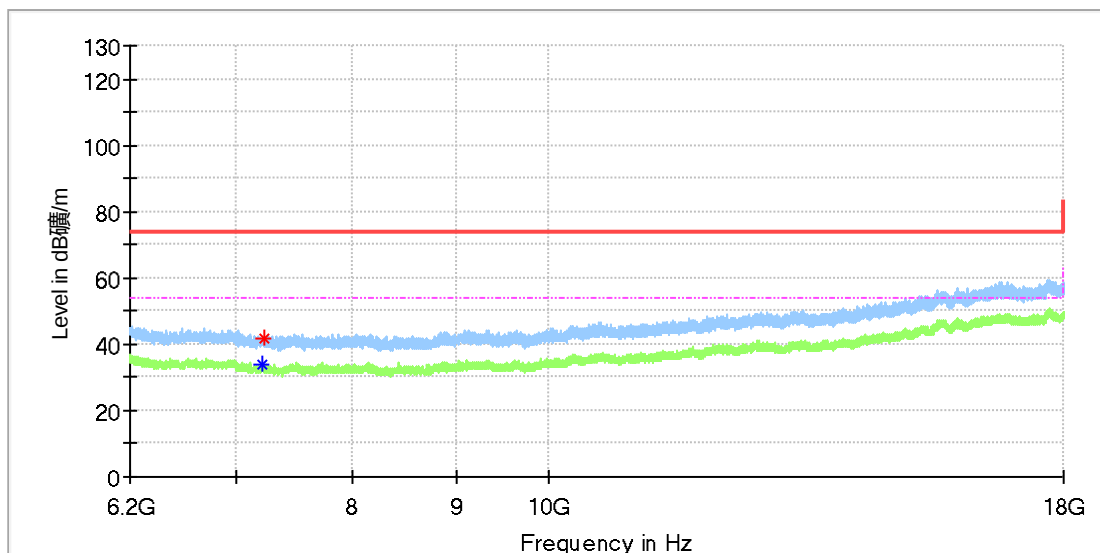

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7217.258333	---	33.64	54.00	20.36	150.0	H	132.0	8.7
7232.008333	41.92	---	74.00	32.08	150.0	H	21.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

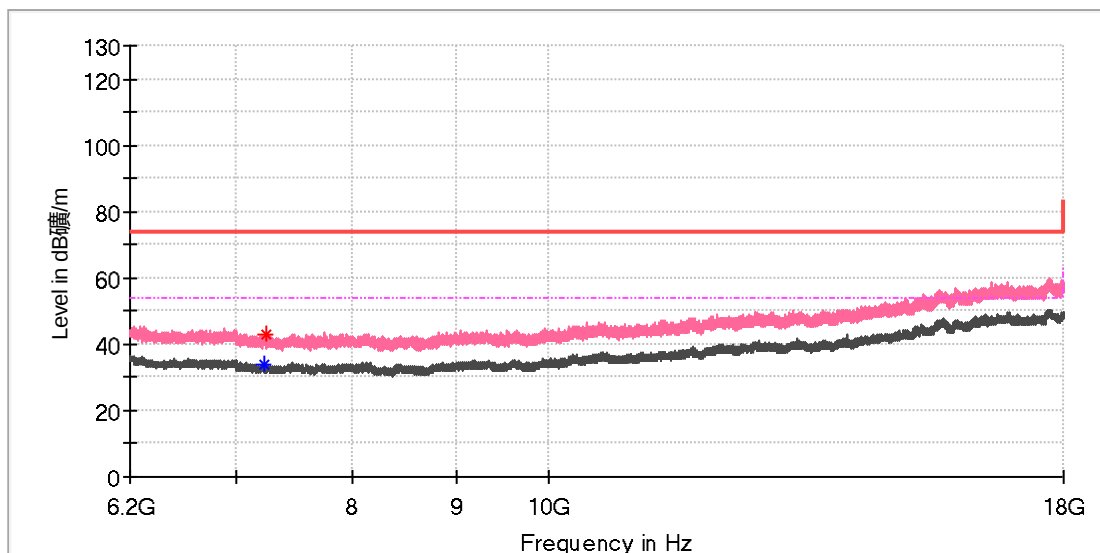

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7220.700000	---	33.86	54.00	20.14	150.0	V	227.0	8.7
7239.875000	42.82	---	74.00	31.18	150.0	V	287.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

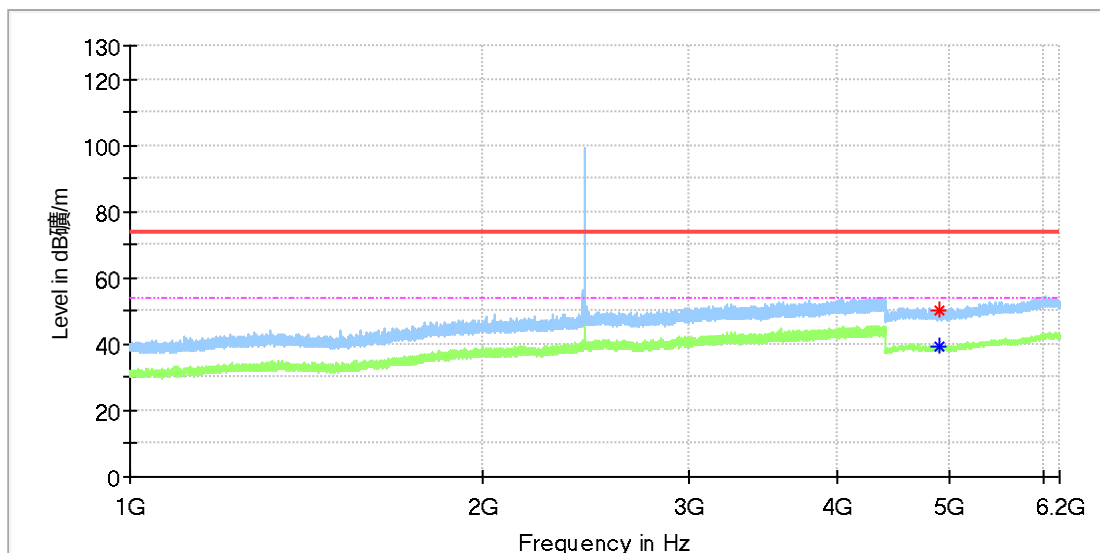

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4899.000000	---	39.38	54.00	14.62	150.0	H	282.0	11.8
4900.500000	50.49	---	74.00	23.51	150.0	H	8.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

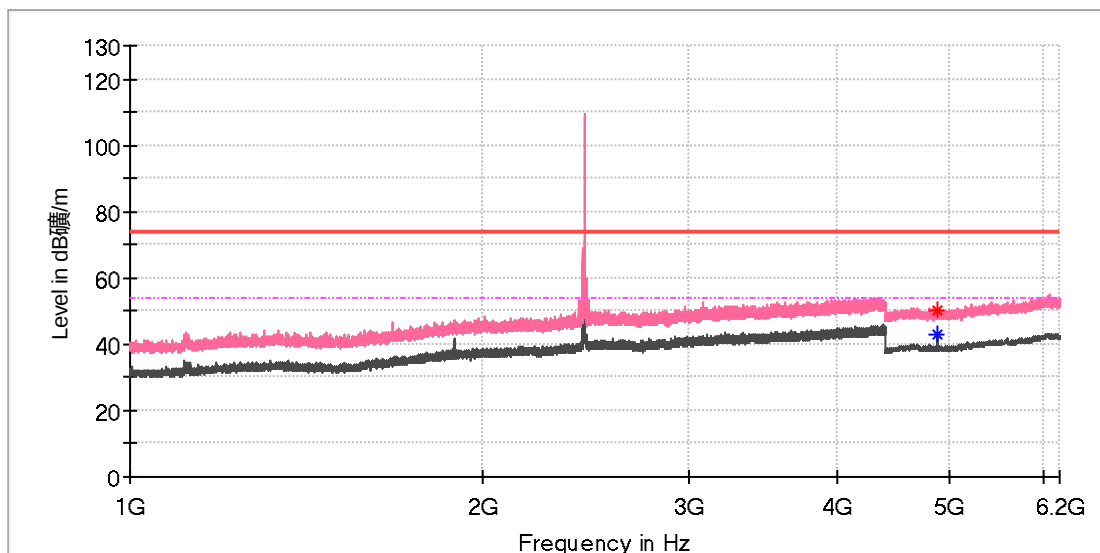

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	---	42.95	54.00	11.05	150.0	V	224.0	11.8
4880.000000	50.35	---	74.00	23.66	150.0	V	230.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

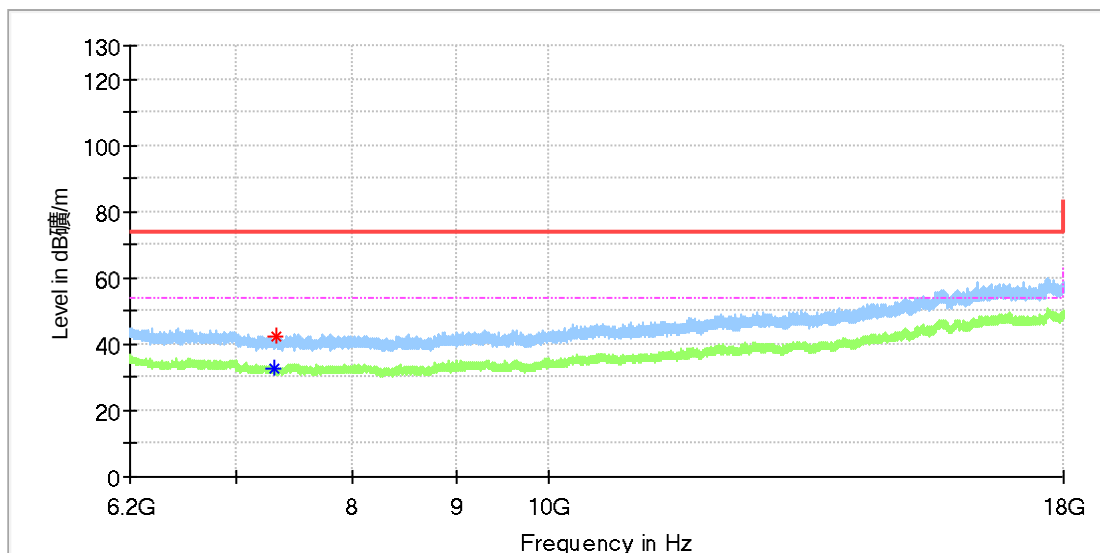

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7314.116667	---	32.74	54.00	21.26	150.0	H	15.0	8.2
7324.441667	42.27	---	74.00	31.73	150.0	H	173.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

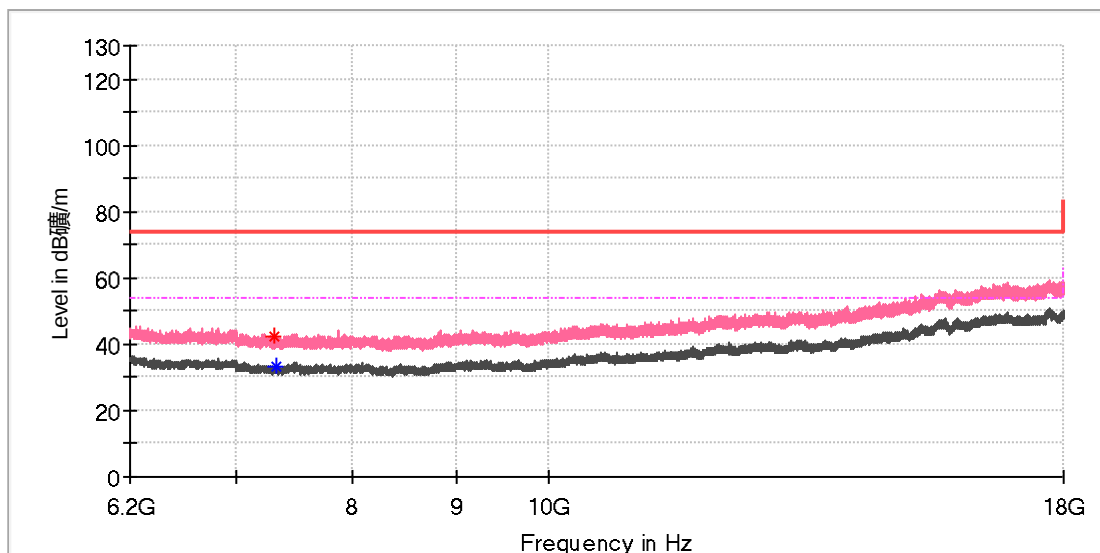

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7306.741667	42.33	---	74.00	31.67	150.0	V	307.0	8.3
7324.933333	---	33.55	54.00	20.45	150.0	V	318.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_High channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

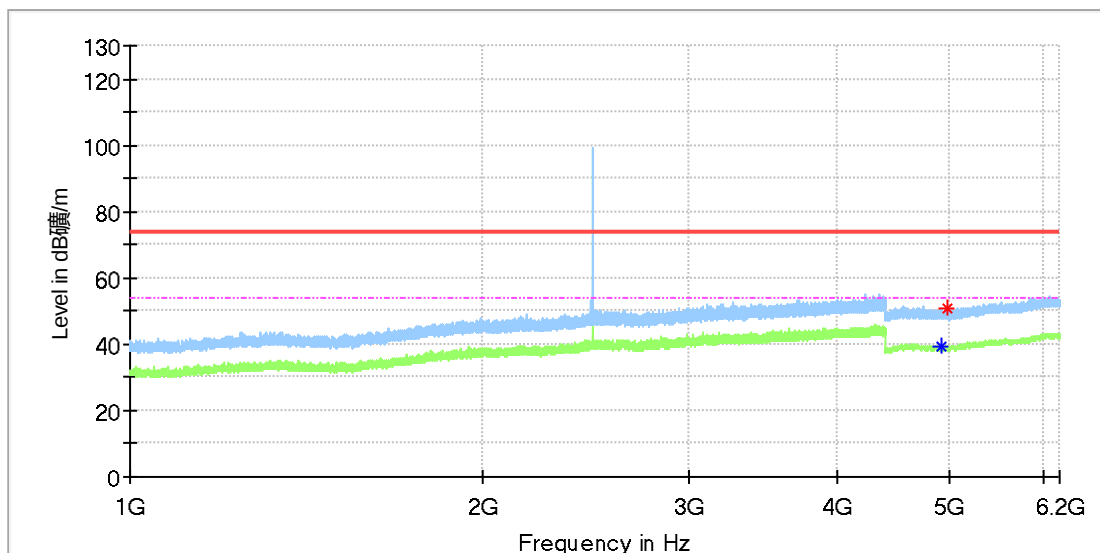

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4918.500000	---	39.31	54.00	14.69	150.0	H	71.0	11.8
4969.000000	51.03	---	74.00	22.97	150.0	H	32.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_High channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

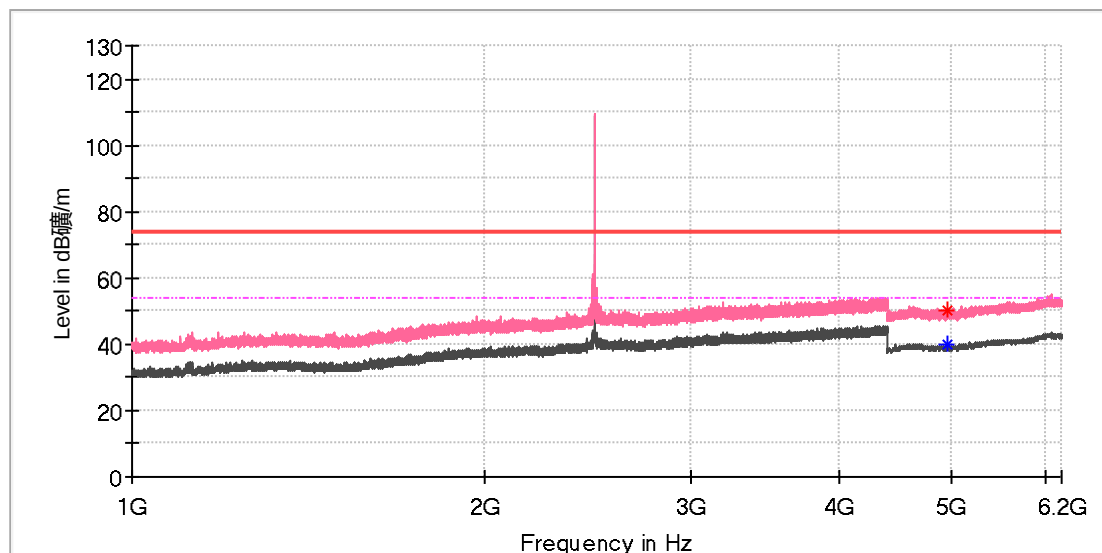

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	---	39.88	54.00	14.12	150.0	V	191.0	11.8
4964.500000	50.38	---	74.00	23.62	150.0	V	22.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_High channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

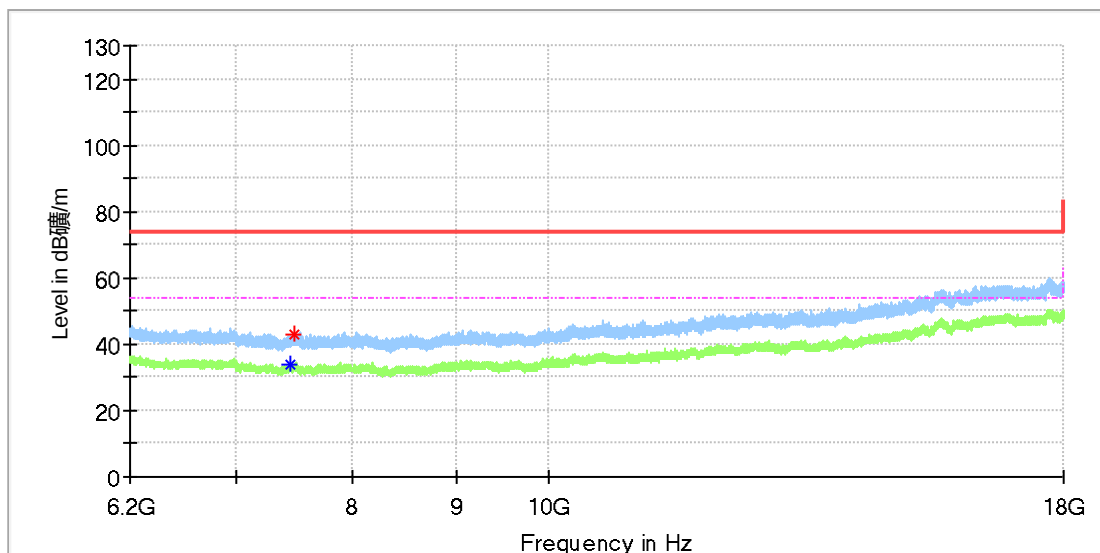

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7437.525000	---	33.83	54.00	20.17	150.0	H	135.0	8.4
7474.891667	43.18	---	74.00	30.82	150.0	H	260.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_High channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

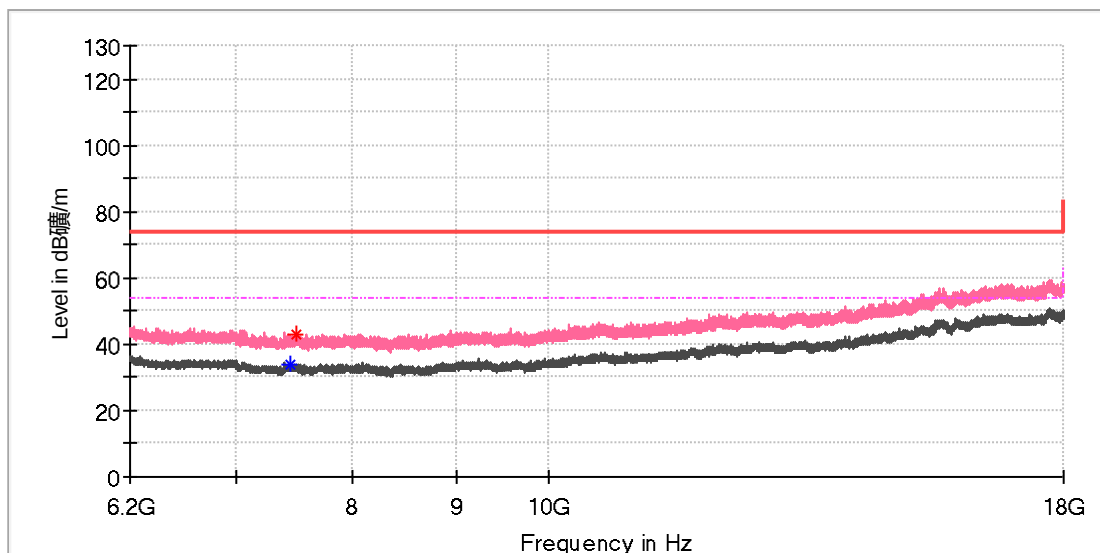

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7452.766667	---	33.78	54.00	20.22	150.0	V	5.0	8.5
7490.625000	43.07	---	74.00	30.93	150.0	V	0.0	8.7


Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

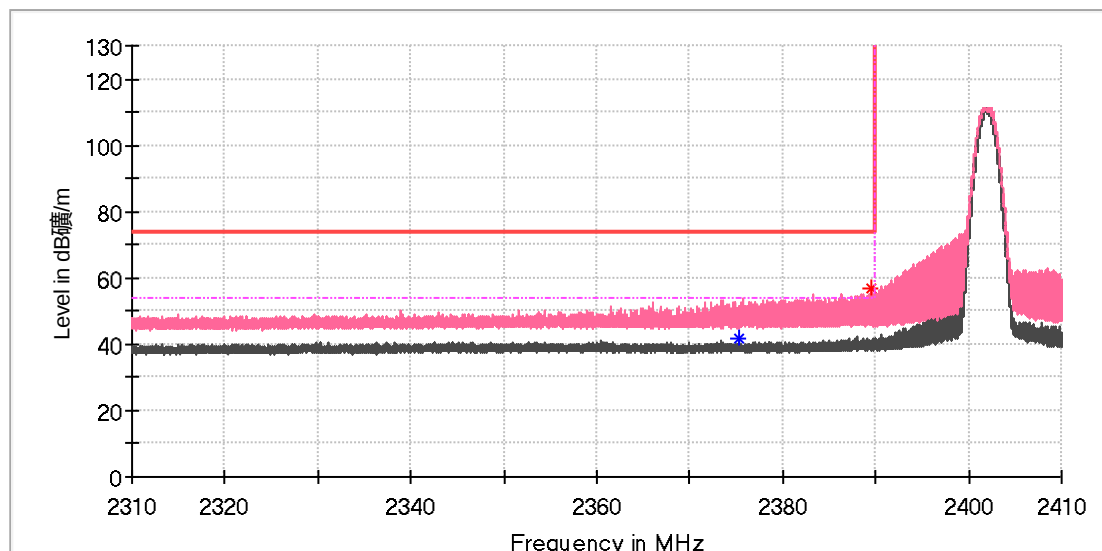

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2375.370000	---	41.86	54.00	12.14	150.0	V	343.0	6.9
2389.600000	56.59	---	74.00	17.41	150.0	V	304.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

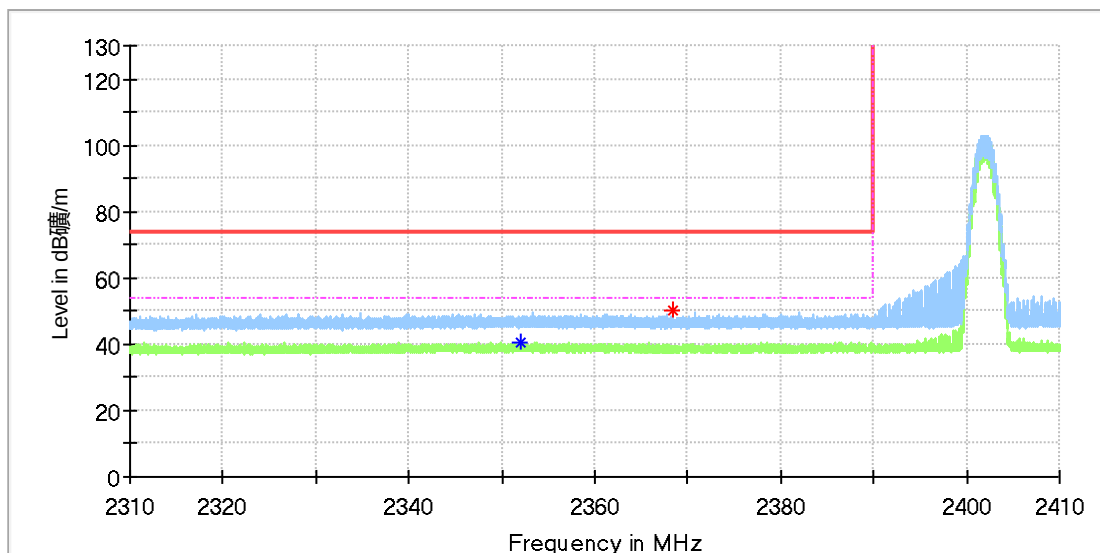

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2351.960000	---	40.81	54.00	13.19	150.0	H	0.0	6.9
2368.435000	50.24	---	74.00	23.76	150.0	H	4.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_High channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

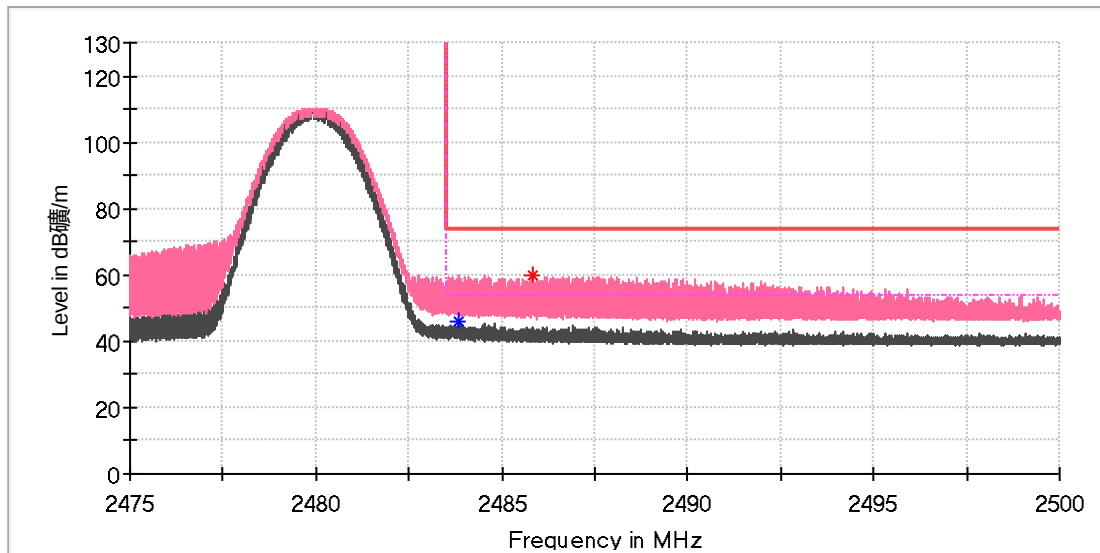

Critical_Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.811250	---	45.73	54.00	8.27	150.0	V	324.0	7.4
2485.841250	59.86	---	74.00	14.14	150.0	V	335.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPS-8195A
Model: OPS-8195A-4R64S
Test Mode: BLE 1M_High channel
Order No/Sample No: 168426958/A003490153-001
Test Voltage:: 120V/60Hz
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

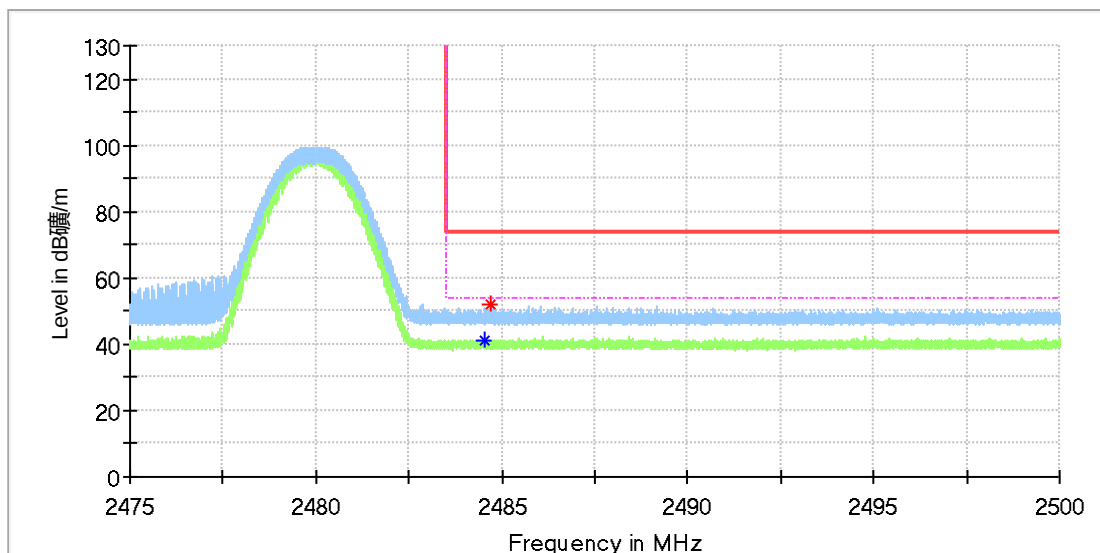

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.525000	---	41.37	54.00	12.63	150.0	H	316.0	7.4
2484.697500	51.71	---	74.00	22.29	150.0	H	135.0	7.4

Final_Result



Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.7: Test Results of Conducted Emission

EUT Information

EUT Name:	OPS-8195A
Model:	OPS-8195A-4R64S
Test Mode:	Normal Operating with Wi-Fi and Bluetooth Connected
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC Part 15.207
Test By:/Review By:	Jason Wu/Jacky chen
Tem./Hum./Pressure:	22°C/55%/101kPa

Test Graph:

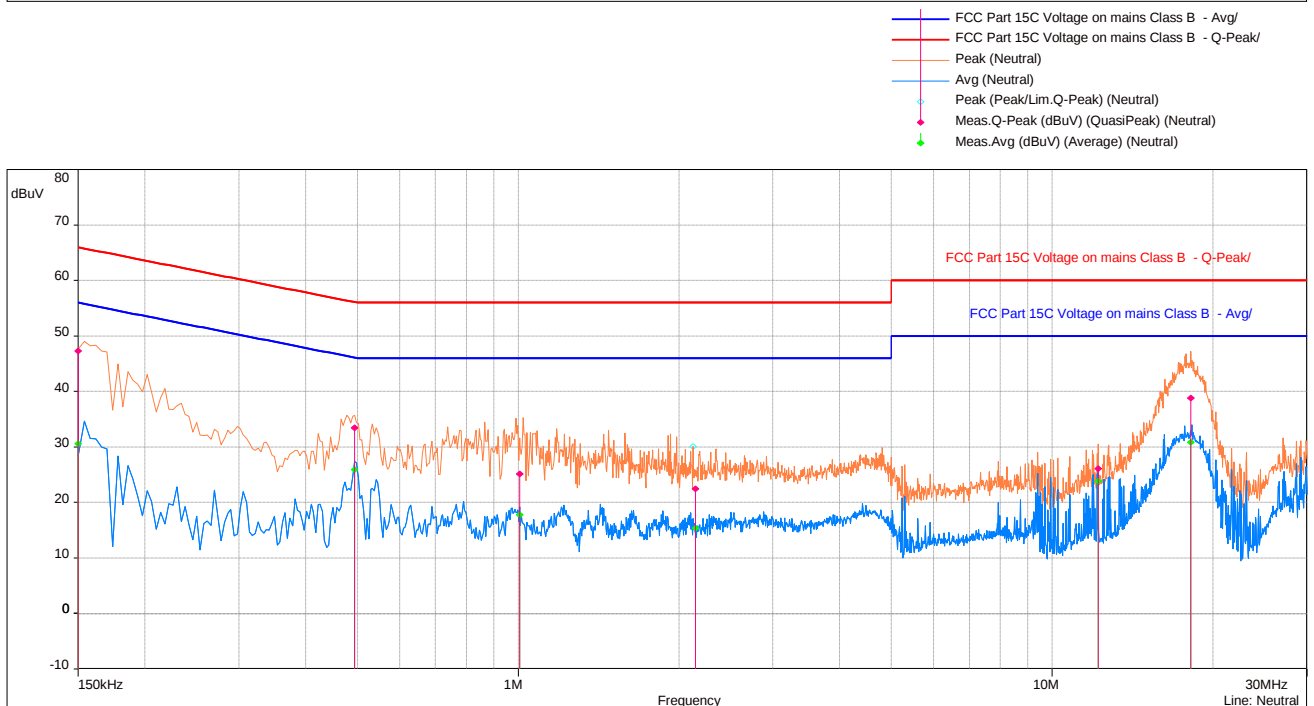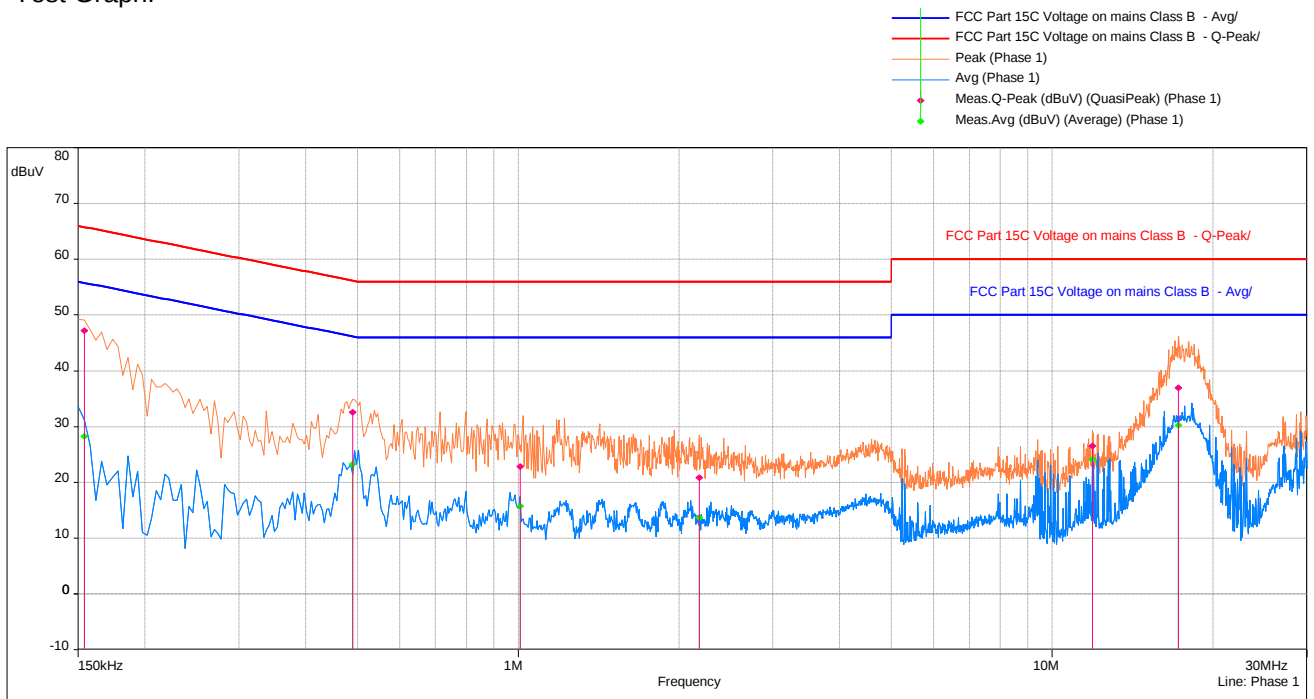

Average (12)

Frequency (MHz)	SR	Meas.Avg (dBuV)	Limit (dBuV)	Meas.-Lim (dB)	Line	RBW	Meas.Time	Comments	Correction (dB)
0.15	1	30.55	56.00	-25.45	Neutral	9k	0.01	Pass	9.67
0.496	1	25.95	46.10	-20.15	Neutral	9k	0.01	Pass	9.79
1.00625	1	17.75	46.00	-28.25	Neutral	9k	0.01	Pass	9.83
2.1485	1	15.37	46.00	-30.63	Neutral	9k	0.01	Pass	9.88
12.20025	1	23.81	50.00	-26.19	Neutral	9k	0.01	Pass	10.11
18.1865	1	30.85	50.00	-19.15	Neutral	9k	0.01	Pass	10.26
0.15225	2	28.25	55.78	-27.53	Phase 1	9k	0.01	Pass	9.69
0.49	2	23.29	46.17	-22.88	Phase 1	9k	0.01	Pass	9.69
1.01075	2	15.75	46.00	-30.25	Phase 1	9k	0.01	Pass	9.70
2.1815	2	13.67	46.00	-32.33	Phase 1	9k	0.01	Pass	9.73
11.894	2	24.07	50.00	-25.93	Phase 1	9k	0.01	Pass	9.94
17.24625	2	30.24	50.00	-19.76	Phase 1	9k	0.01	Pass	10.12

QuasiPeak (12)

Frequency (MHz)	SR	Meas.Q-Peak (dBuV)	Limit (dBuV)	Meas.-Lim (dB)	Line	RBW	Meas.Time	Comments	Correction (dB)
0.15	1	47.29	66.00	-18.71	Neutral	9k	0.01	Pass	9.67
0.496	1	33.46	56.10	-22.64	Neutral	9k	0.01	Pass	9.79
1.00625	1	25.16	56.00	-30.84	Neutral	9k	0.01	Pass	9.83
2.1485	1	22.44	56.00	-33.56	Neutral	9k	0.01	Pass	9.88
12.20025	1	26.08	60.00	-33.92	Neutral	9k	0.01	Pass	10.11
18.1865	1	38.80	60.00	-21.20	Neutral	9k	0.01	Pass	10.26
0.15225	2	47.17	65.78	-18.61	Phase 1	9k	0.01	Pass	9.69
0.49	2	32.57	56.17	-23.60	Phase 1	9k	0.01	Pass	9.69
1.01075	2	22.85	56.00	-33.15	Phase 1	9k	0.01	Pass	9.70
2.1815	2	20.86	56.00	-35.14	Phase 1	9k	0.01	Pass	9.73
11.894	2	26.50	60.00	-33.50	Phase 1	9k	0.01	Pass	9.94
17.24625	2	36.94	60.00	-23.06	Phase 1	9k	0.01	Pass	10.12

Start Frequency	Stop Frequency	Frequency step	RBW	Sweep Time	Position
150kHz	30MHz	4kHz	9kHz	10 ms	Neutral
150kHz	30MHz	4kHz	9kHz	10 ms	Phase 1