




Z Axis Scan



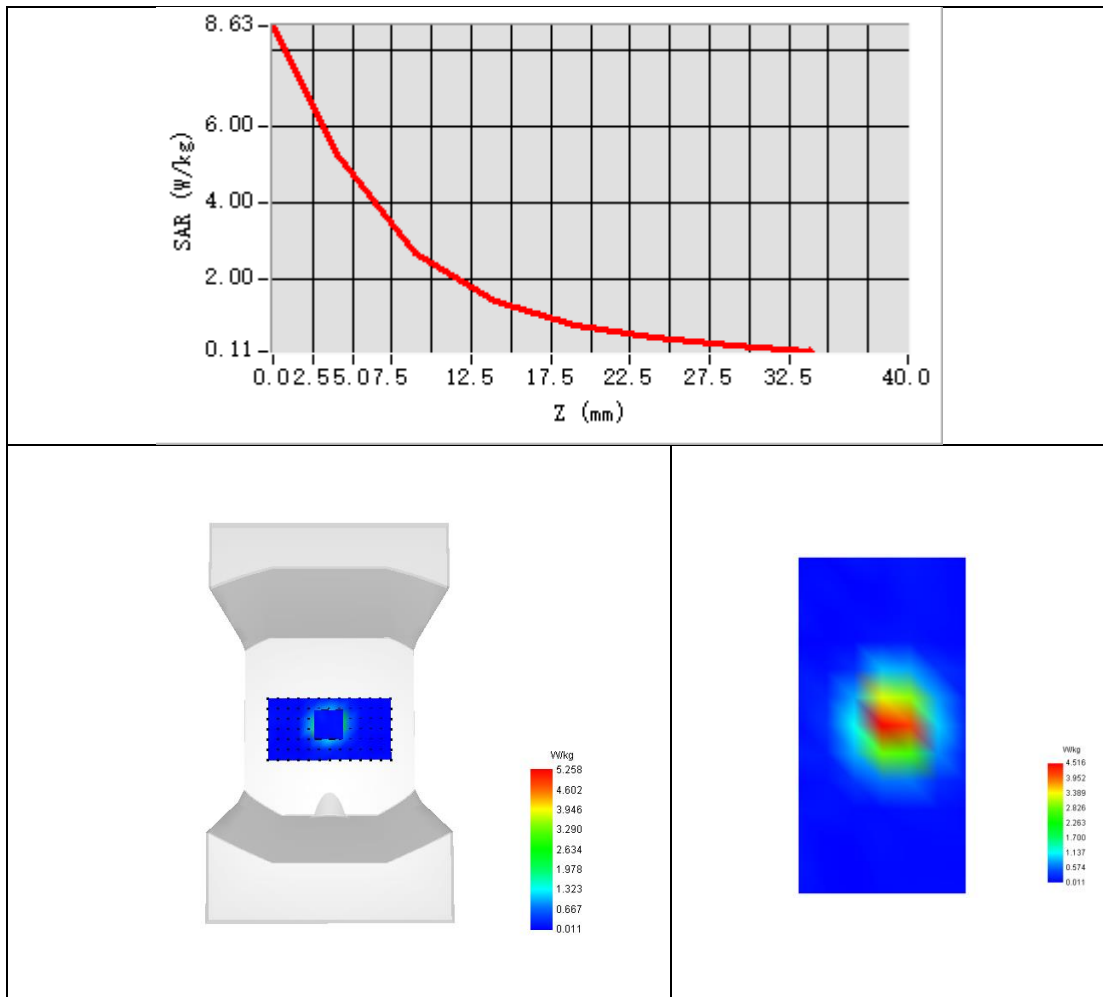

System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-10-21

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.85
Conductivity (S/m)	1.94
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

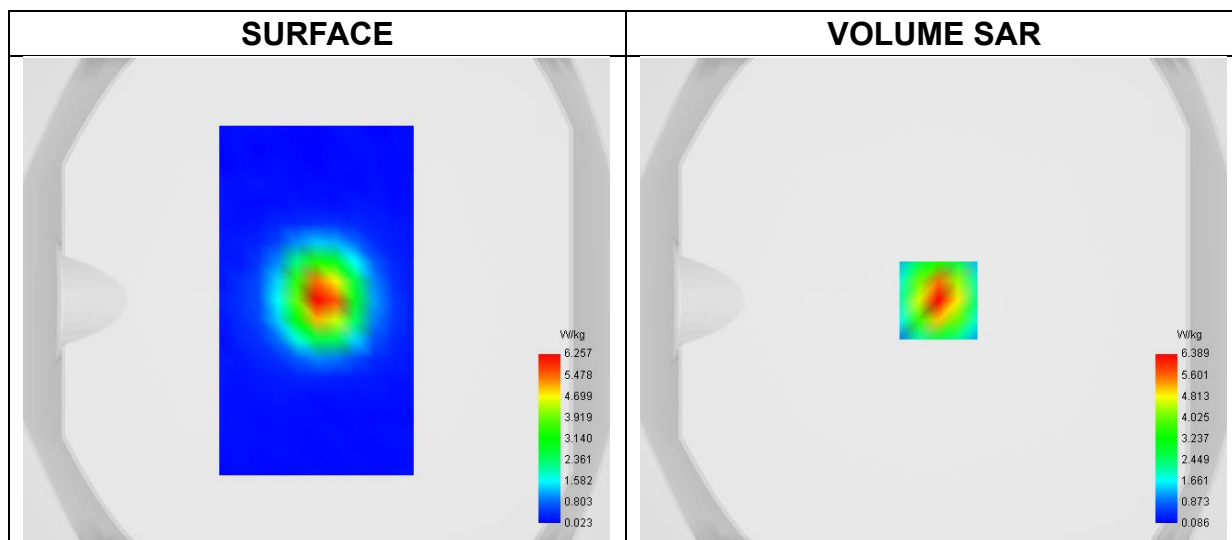


Maximum location: X=3.00, Y=3.00 ; SAR Peak: 9.85 W/kg

SAR 10g (W/Kg)	2.868
SAR 1g (W/Kg)	5.961



Z Axis Scan

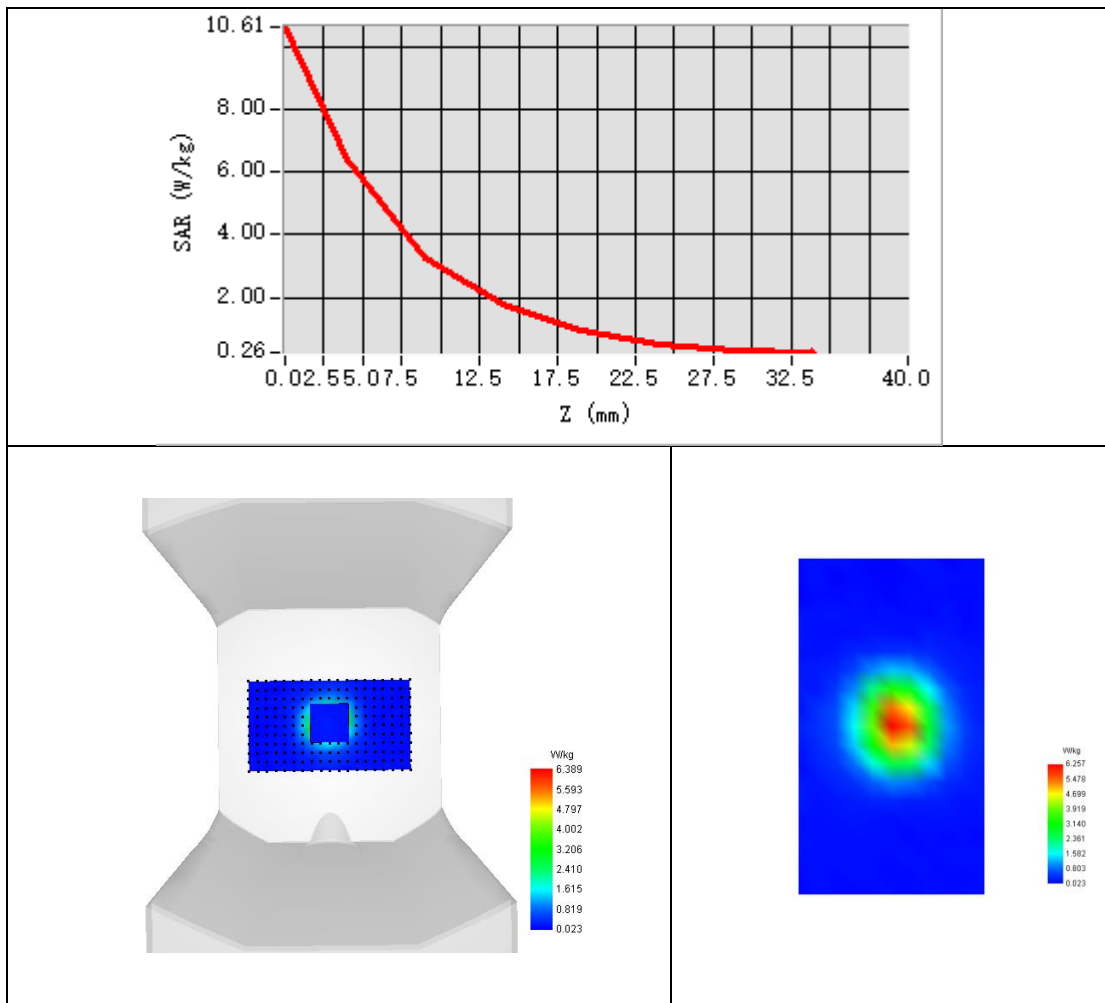



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-10-22

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.52
Conductivity (S/m)	1.97
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

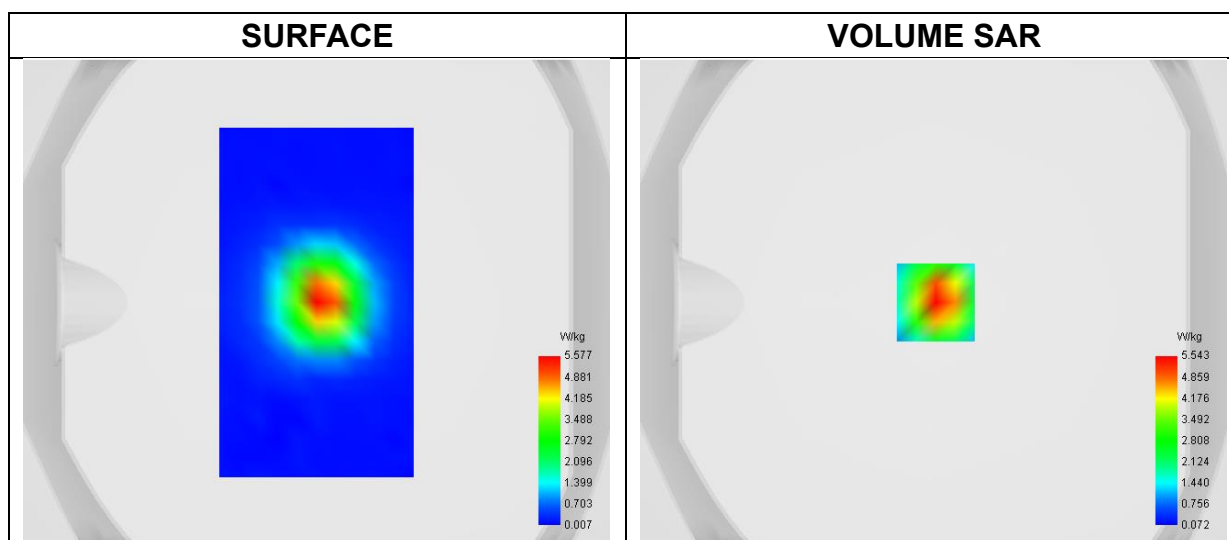


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 9.12 W/kg

SAR 10g (W/Kg)	2.573
SAR 1g (W/Kg)	5.238



Z Axis Scan

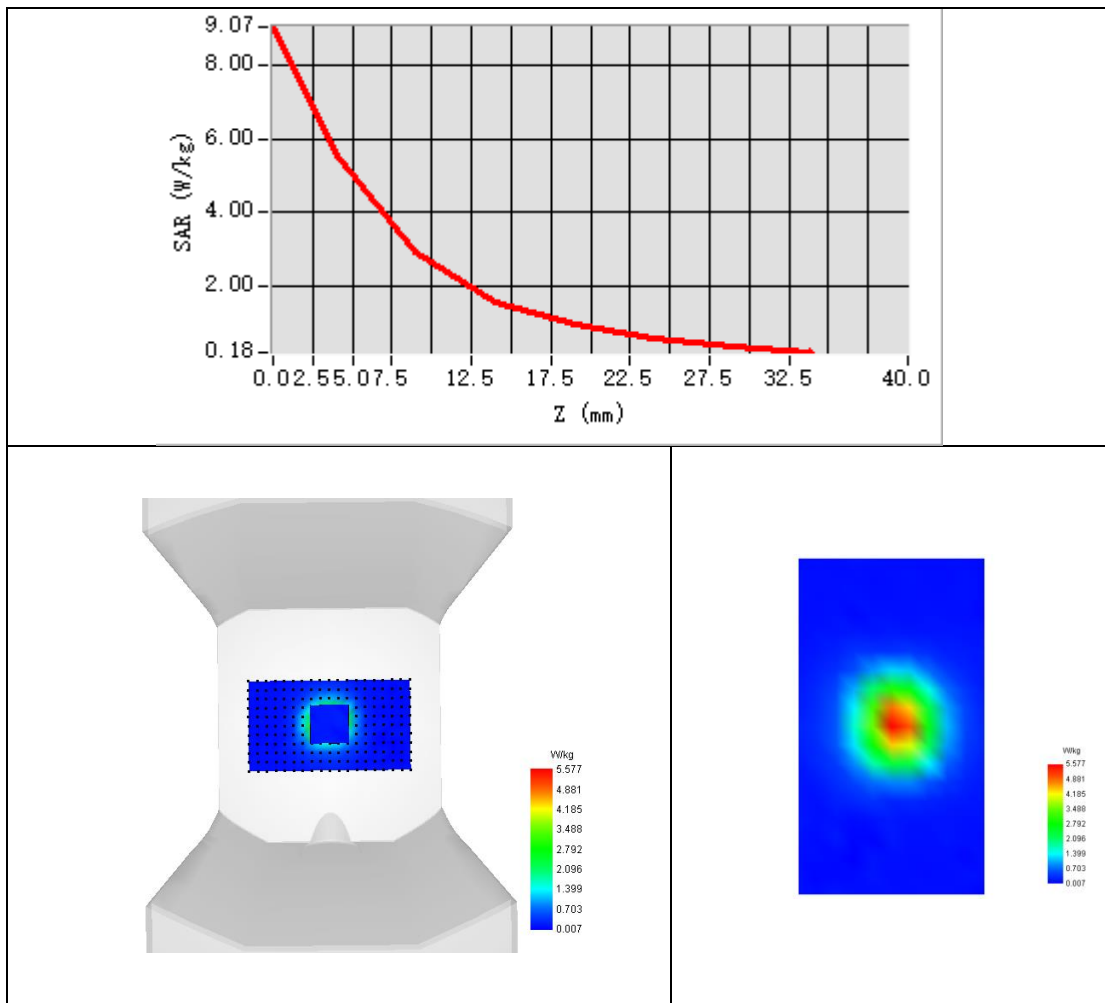



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-10-23

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	40.31
Conductivity (S/m)	1.99
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

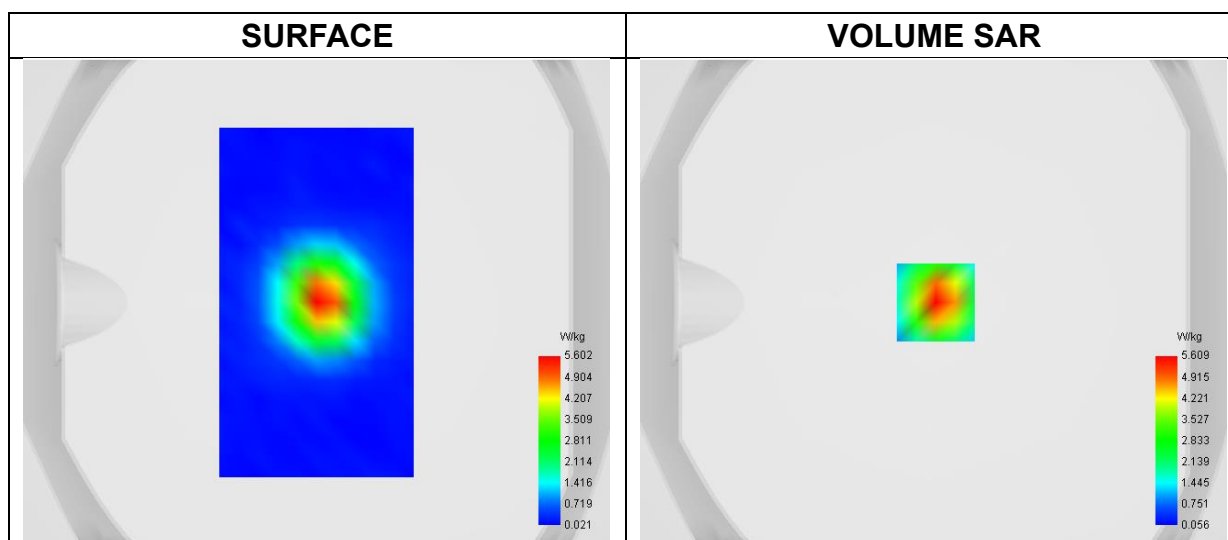


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 9.19 W/kg

SAR 10g (W/Kg)	2.593
SAR 1g (W/Kg)	5.287



Z Axis Scan

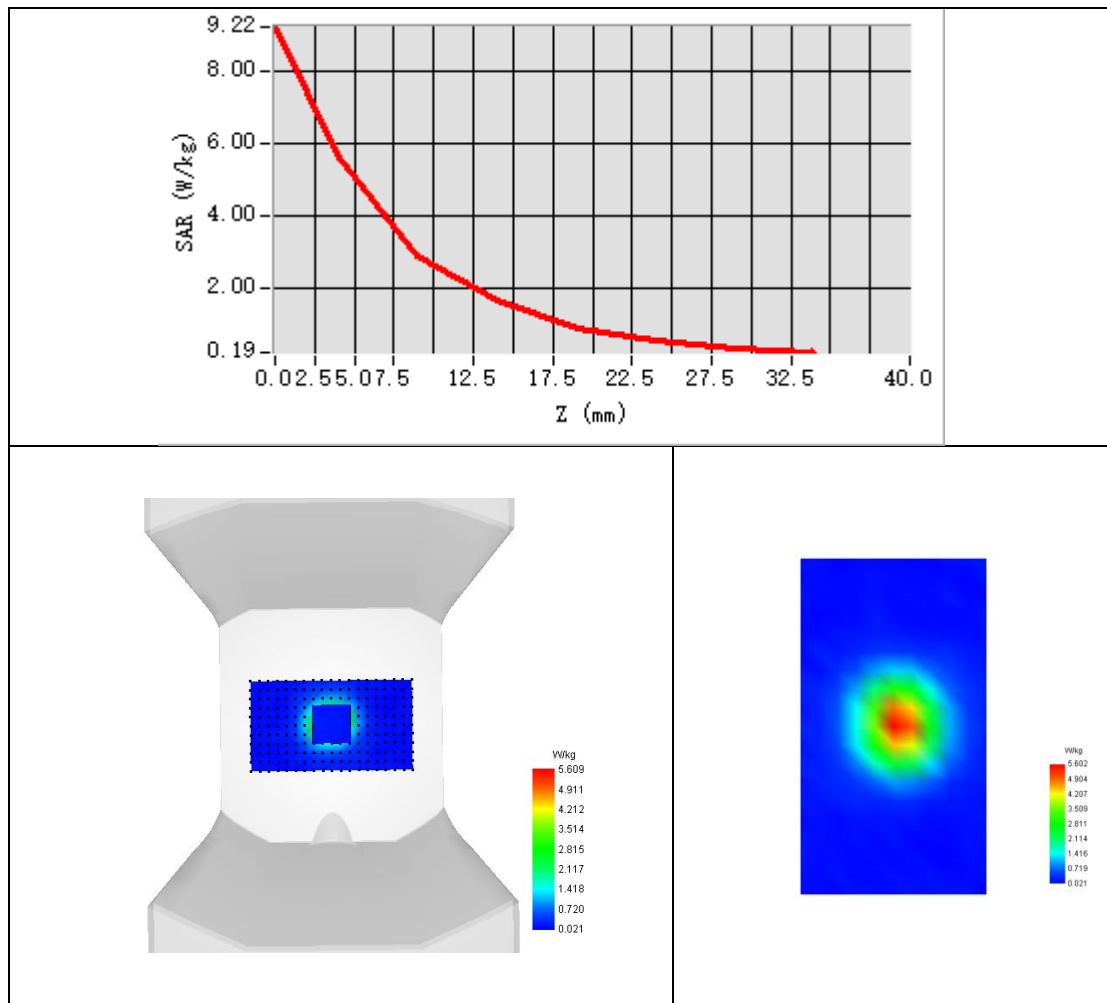



System Performance Check Data (3700MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-10-24

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW3700
Channels	Middle
Signal	CW
Frequency (MHz)	3700.000
Relative permittivity	37.91
Conductivity (S/m)	3.14
Probe	SN 04/22 EPG0364
ConvF	1.82
Crest factor:	1:1

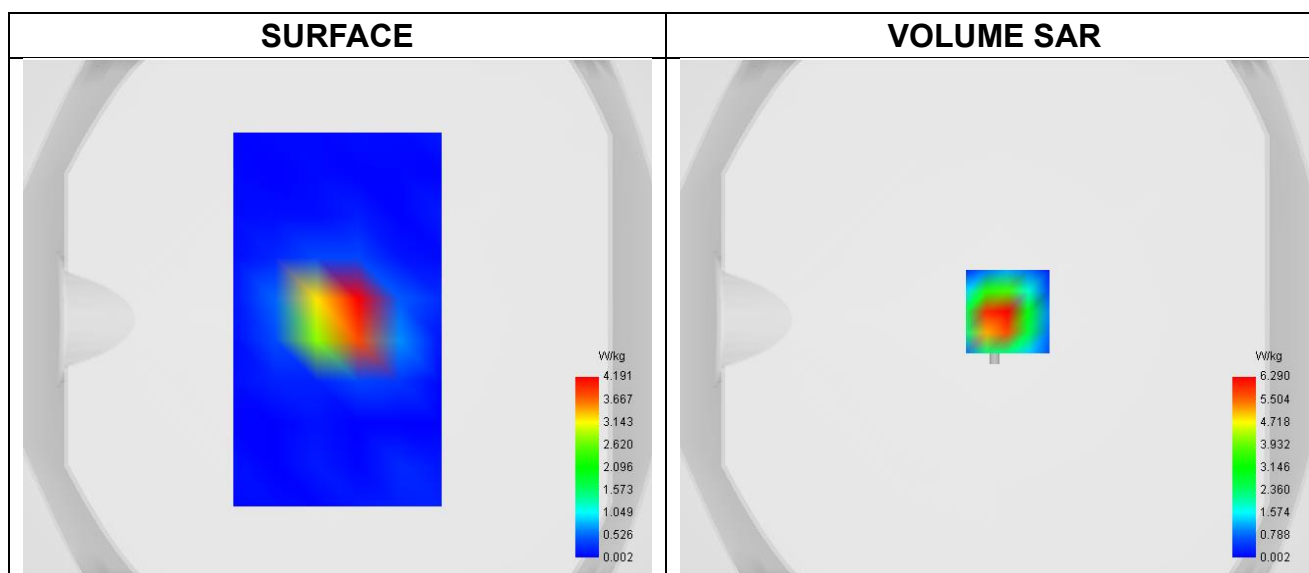


Maximum location: X=5.00, Y=3.00 ; SAR Peak: 13.95 W/kg

SAR 10g (W/Kg)	2.384
SAR 1g (W/Kg)	6.580



Z Axis Scan

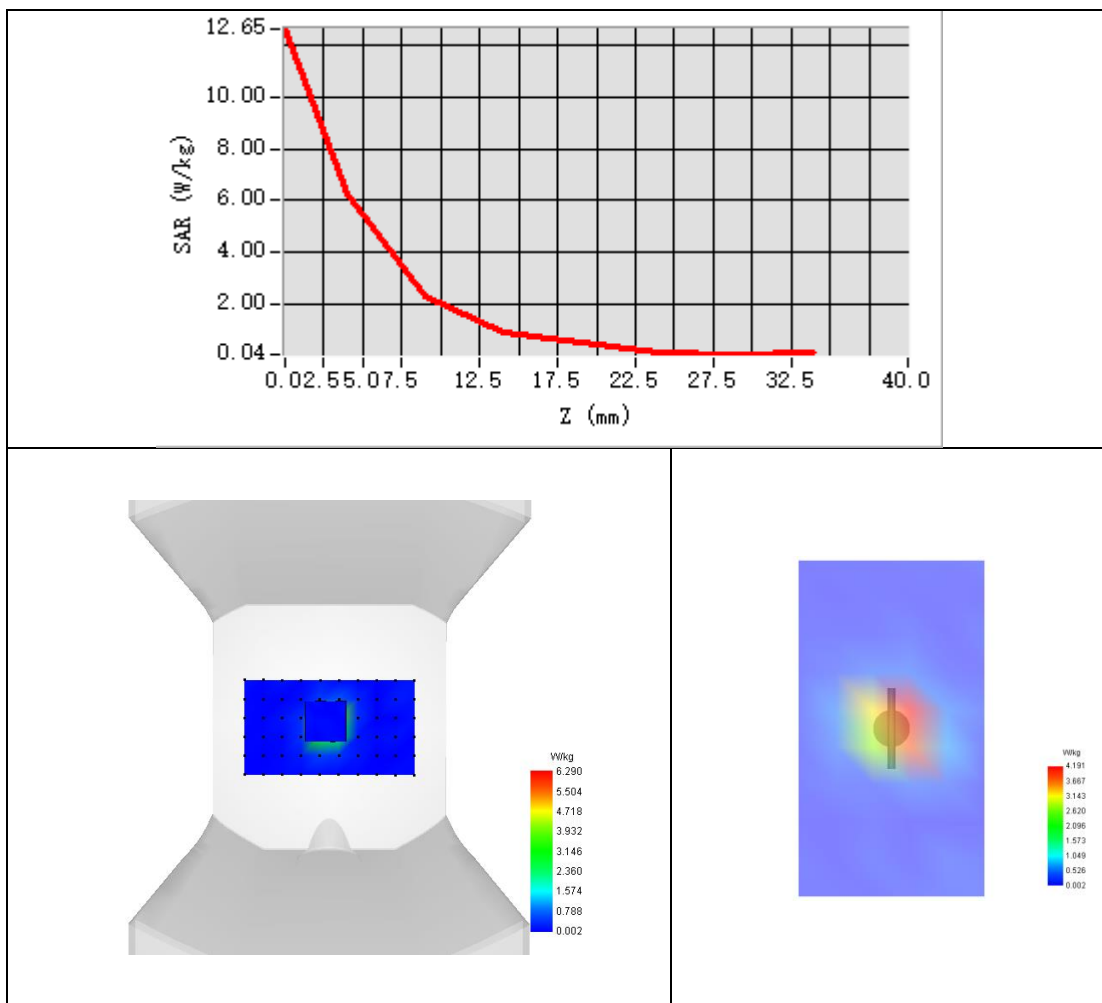



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-10-25

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	36.49
Conductivity (S/m)	4.61
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

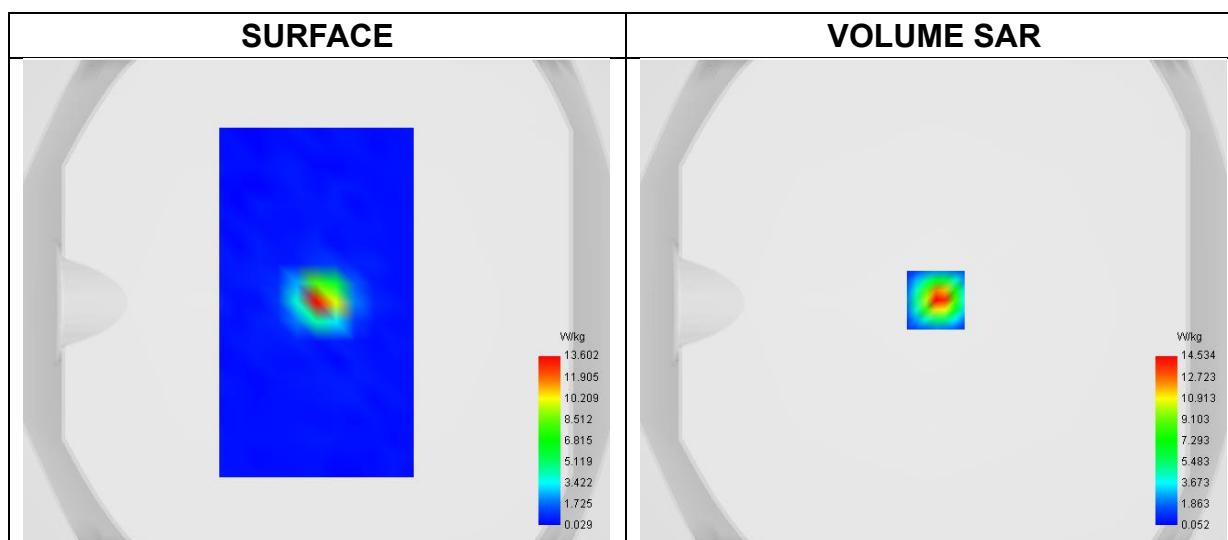


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 24.74 W/kg

SAR 10g (W/Kg)	2.270
SAR 1g (W/Kg)	7.833



Z Axis Scan

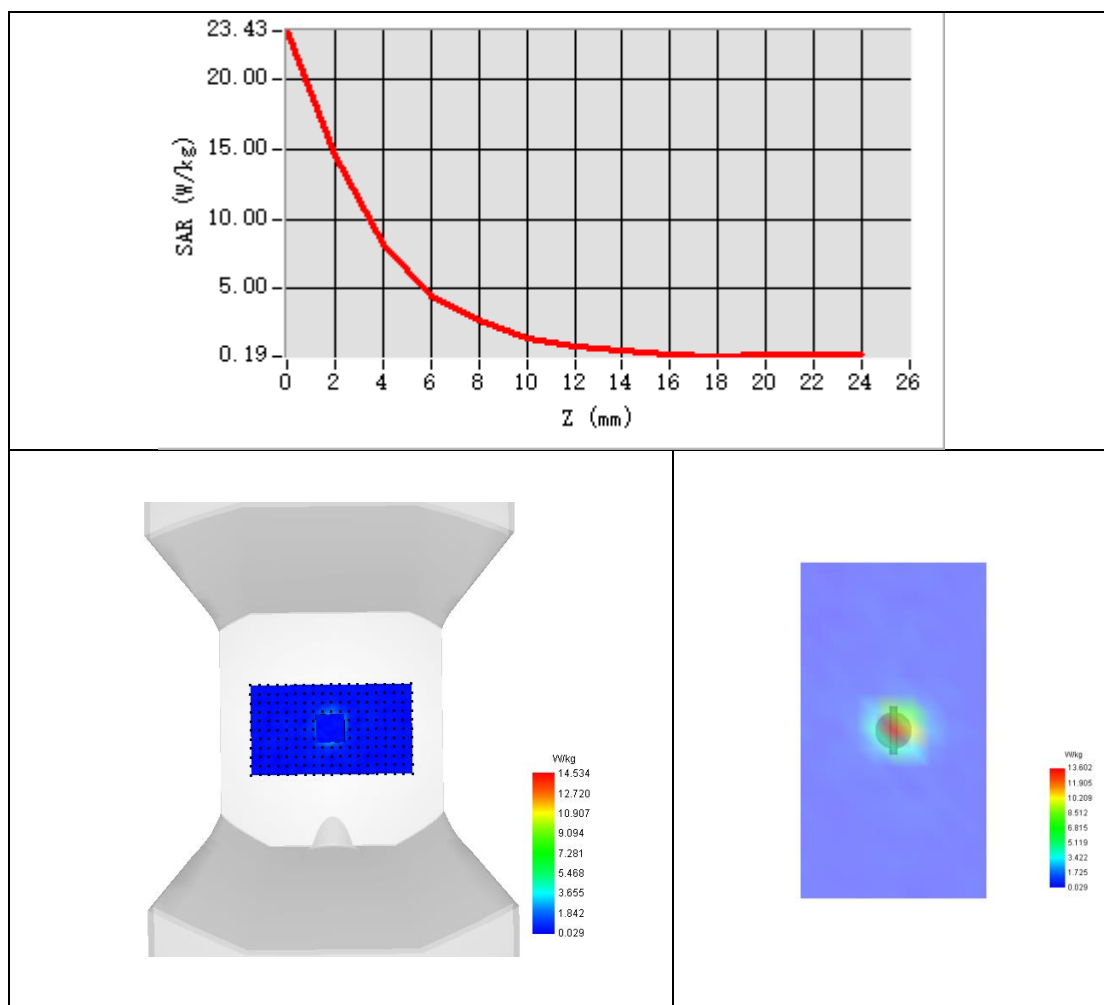



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-10-30

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	36.91
Conductivity (S/m)	4.64
Probe	SN 04/22 EPGO364
ConvF	1.91
Crest factor:	1:1

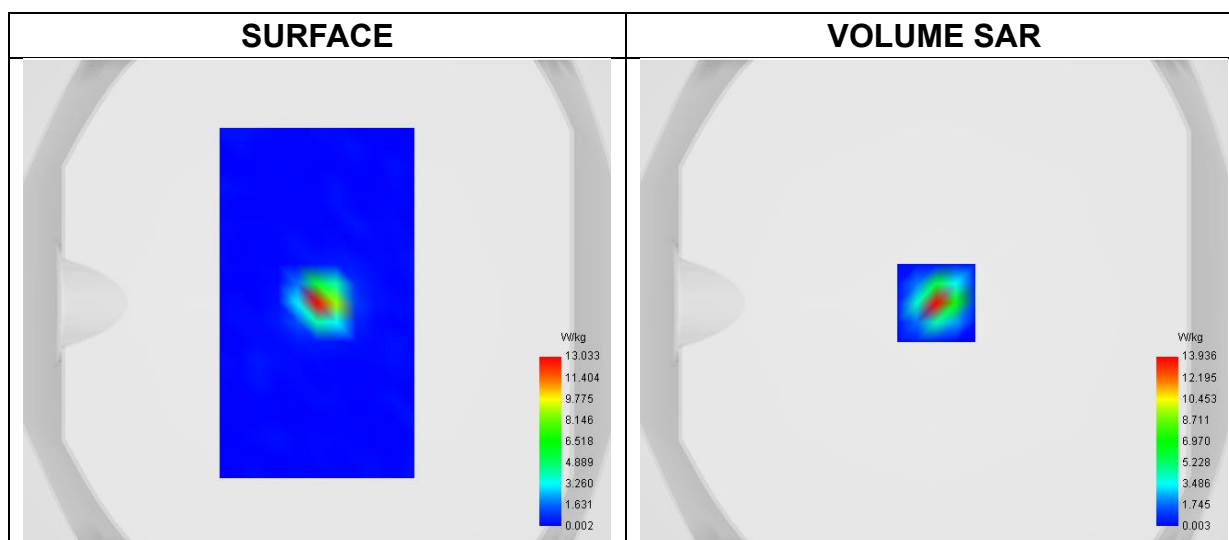


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 22.81 W/kg

SAR 10g (W/Kg)	2.016
SAR 1g (W/Kg)	7.482



Z Axis Scan

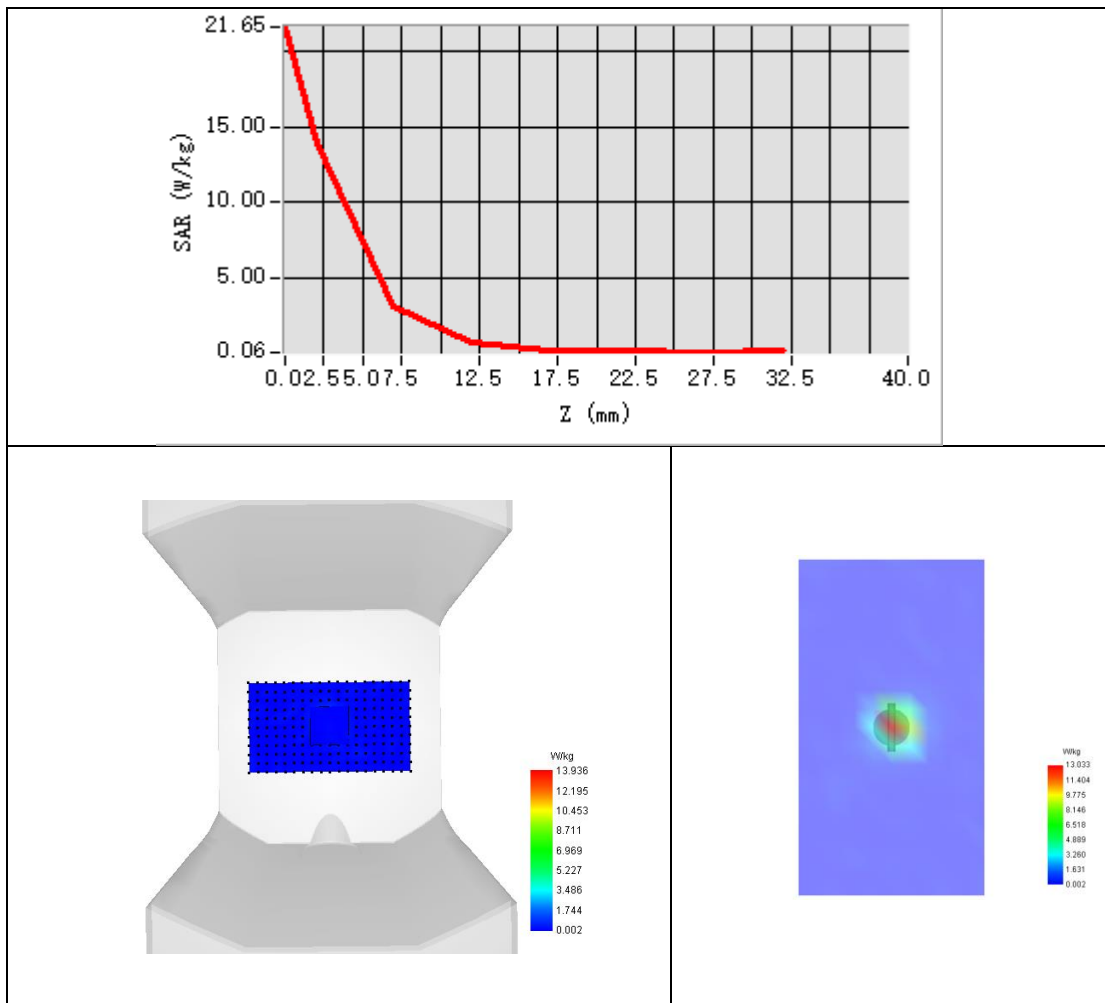



System Performance Check Data (5300MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-10-26

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5300
Channels	Middle
Signal	CW
Frequency (MHz)	5300.000
Relative permittivity	36.05
Conductivity (S/m)	4.80
Probe	SN 04/22 EPGO364
ConvF	1.85
Crest factor:	1:1

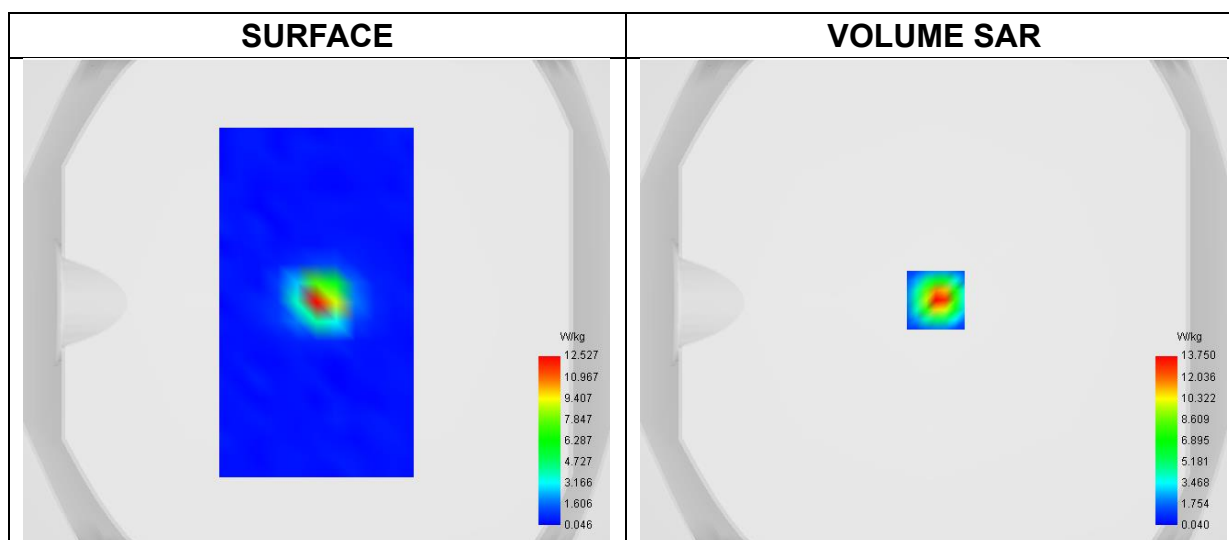


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 22.86 W/kg

SAR 10g (W/Kg)	2.146
SAR 1g (W/Kg)	7.803



Z Axis Scan

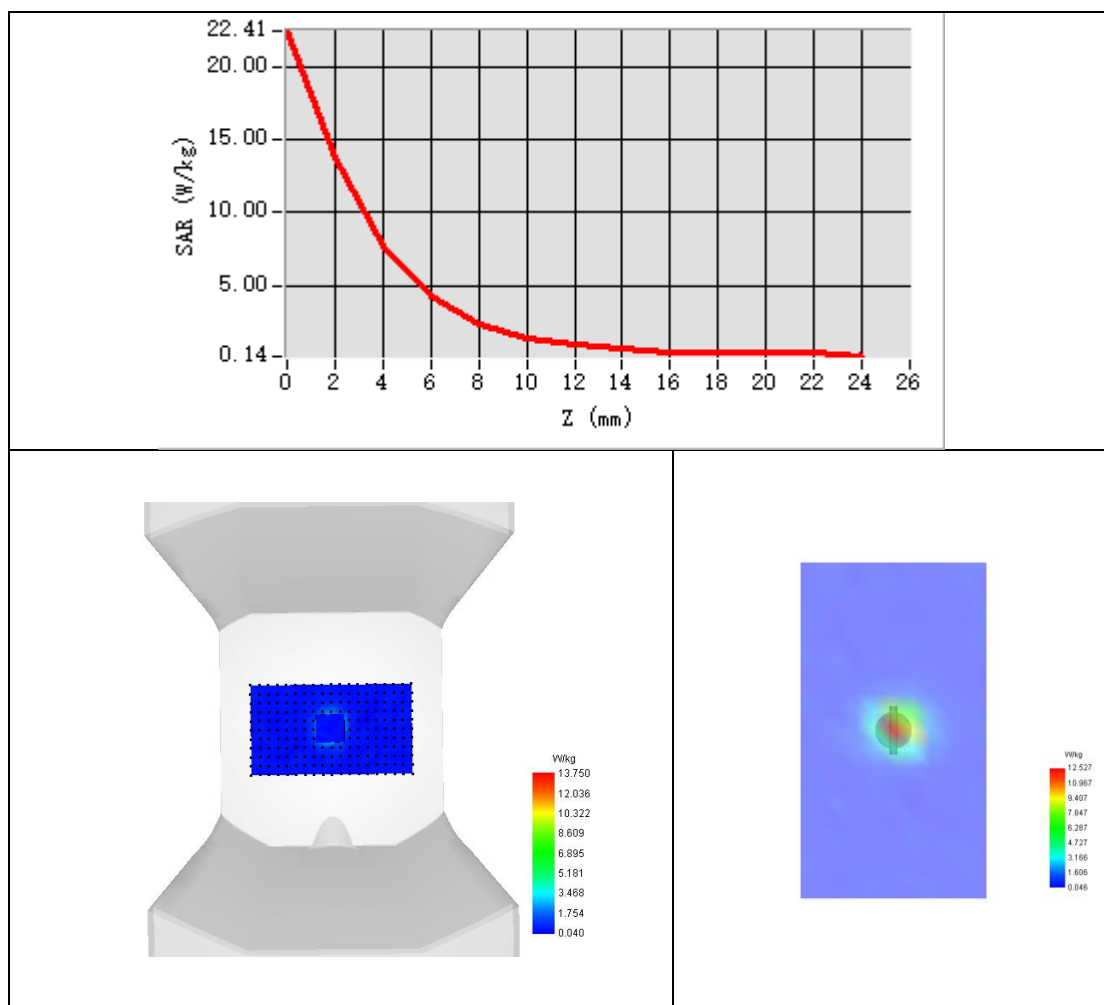



System Performance Check Data (5300MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-10-31

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5300
Channels	Middle
Signal	CW
Frequency (MHz)	5300.000
Relative permittivity	37.04
Conductivity (S/m)	4.75
Probe	SN 04/22 EPGO364
ConvF	1.80
Crest factor:	1:1

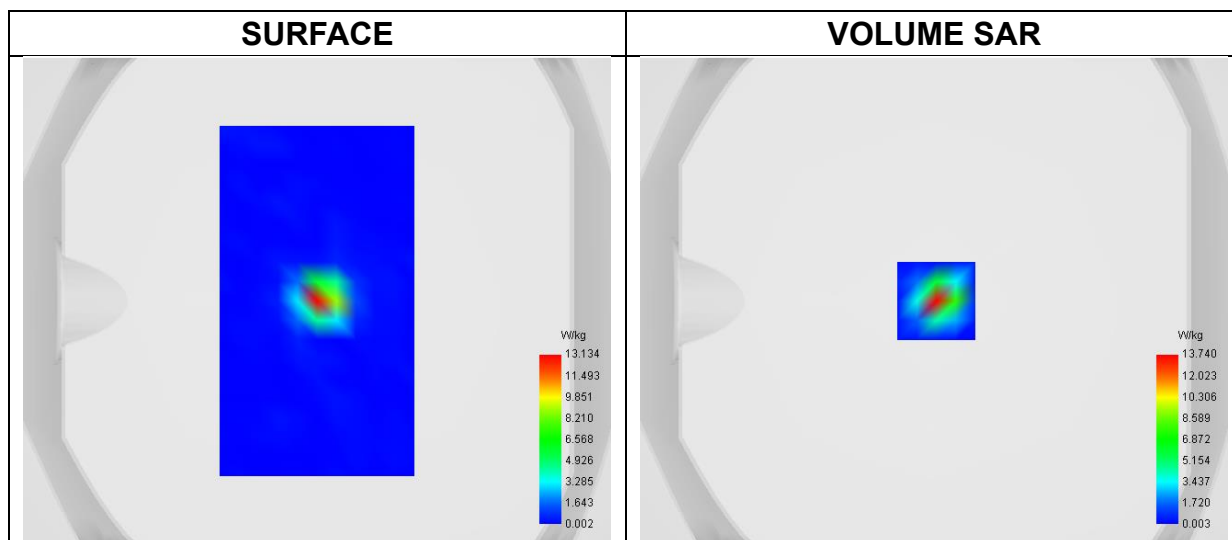


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 22.31 W/kg

SAR 10g (W/Kg)	2.042
SAR 1g (W/Kg)	7.792



Z Axis Scan

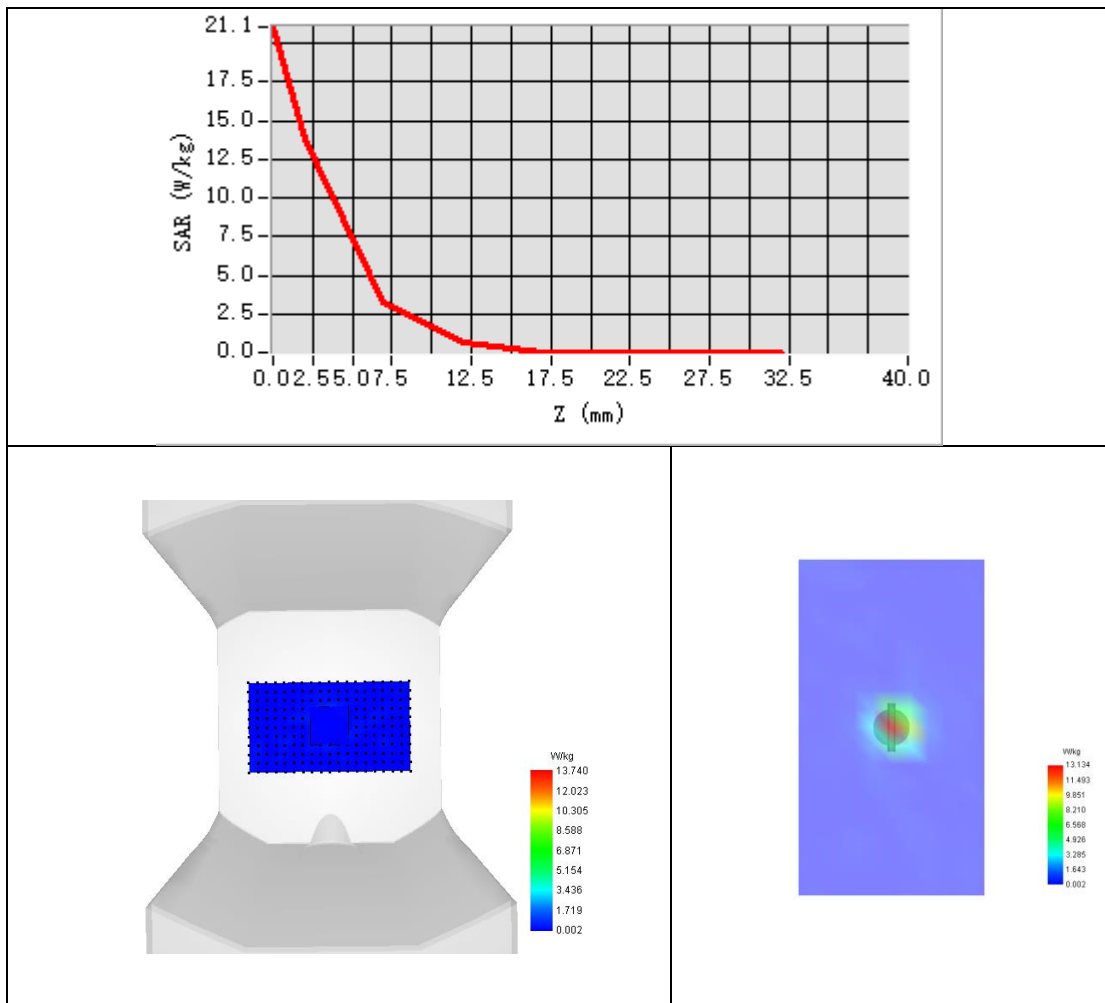



System Performance Check Data (5600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-10-27

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW
Frequency (MHz)	5600.000
Relative permittivity	36.95
Conductivity (S/m)	5.02
Probe	SN 04/22 EPGO364
ConvF	1.86
Crest factor:	1:1

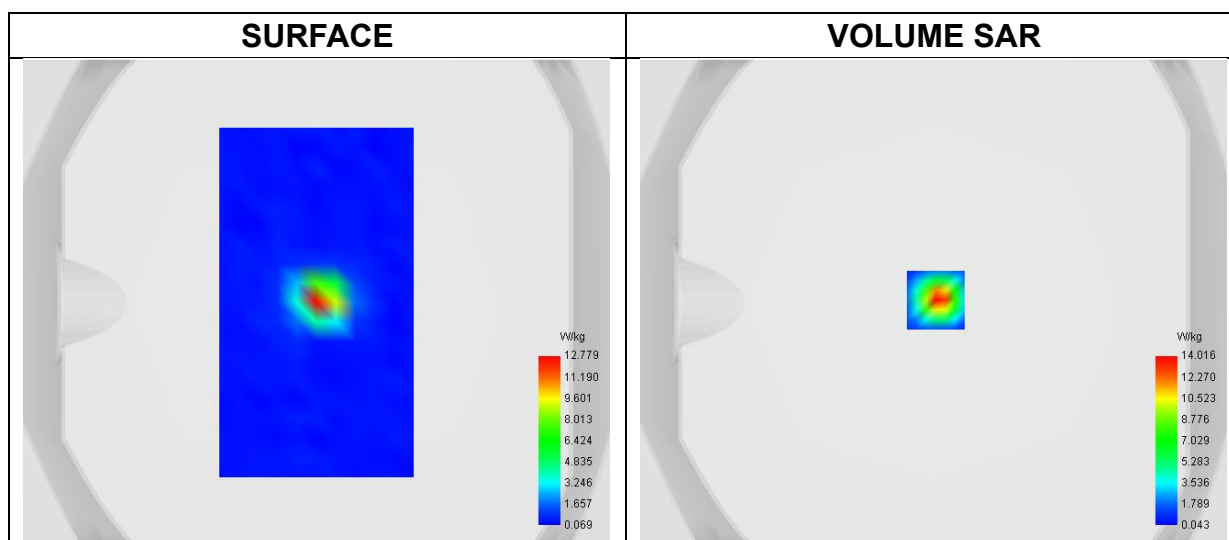


Maximum location: X=1.00, Y=1.00 ; SAR Peak: 23.19 W/kg

SAR 10g (W/Kg)	2.171
SAR 1g (W/Kg)	7.915



Z Axis Scan

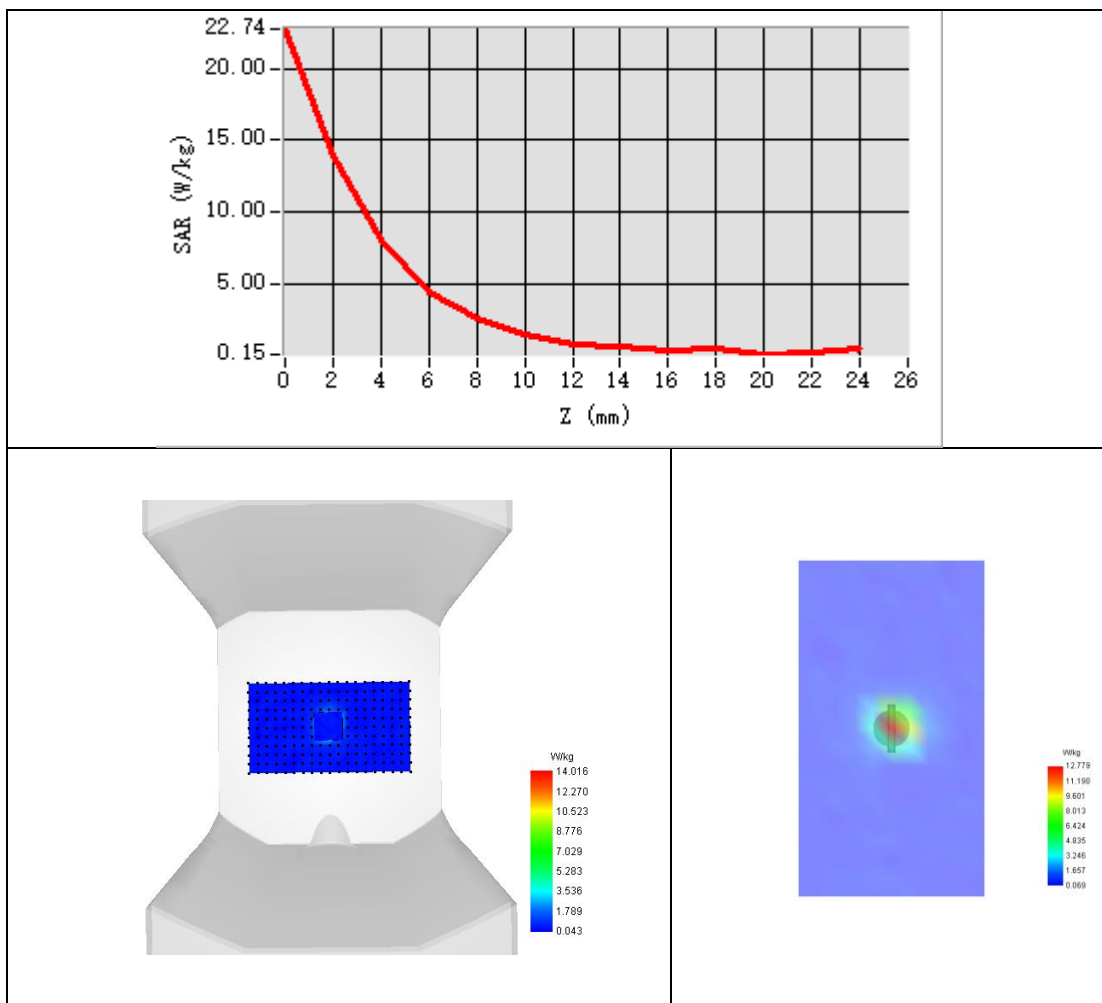



System Performance Check Data (5600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-11-04

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW
Frequency (MHz)	5600.000
Relative permittivity	36.05
Conductivity (S/m)	5.04
Probe	SN 04/22 EPGO364
ConvF	1.76
Crest factor:	1:1

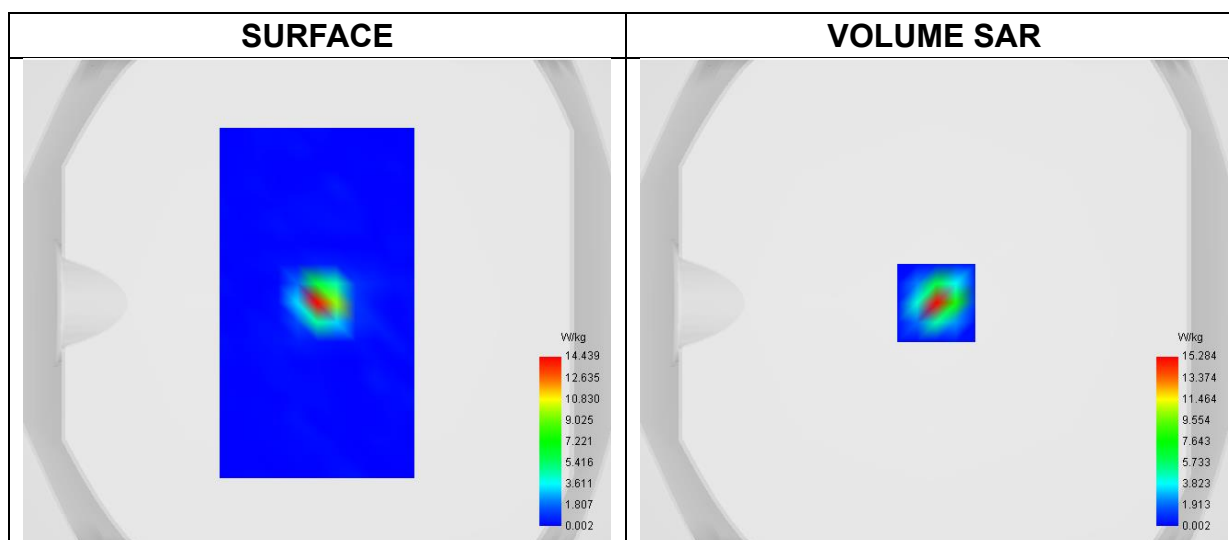


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 26.02 W/kg

SAR 10g (W/Kg)	2.308
SAR 1g (W/Kg)	8.258



Z Axis Scan

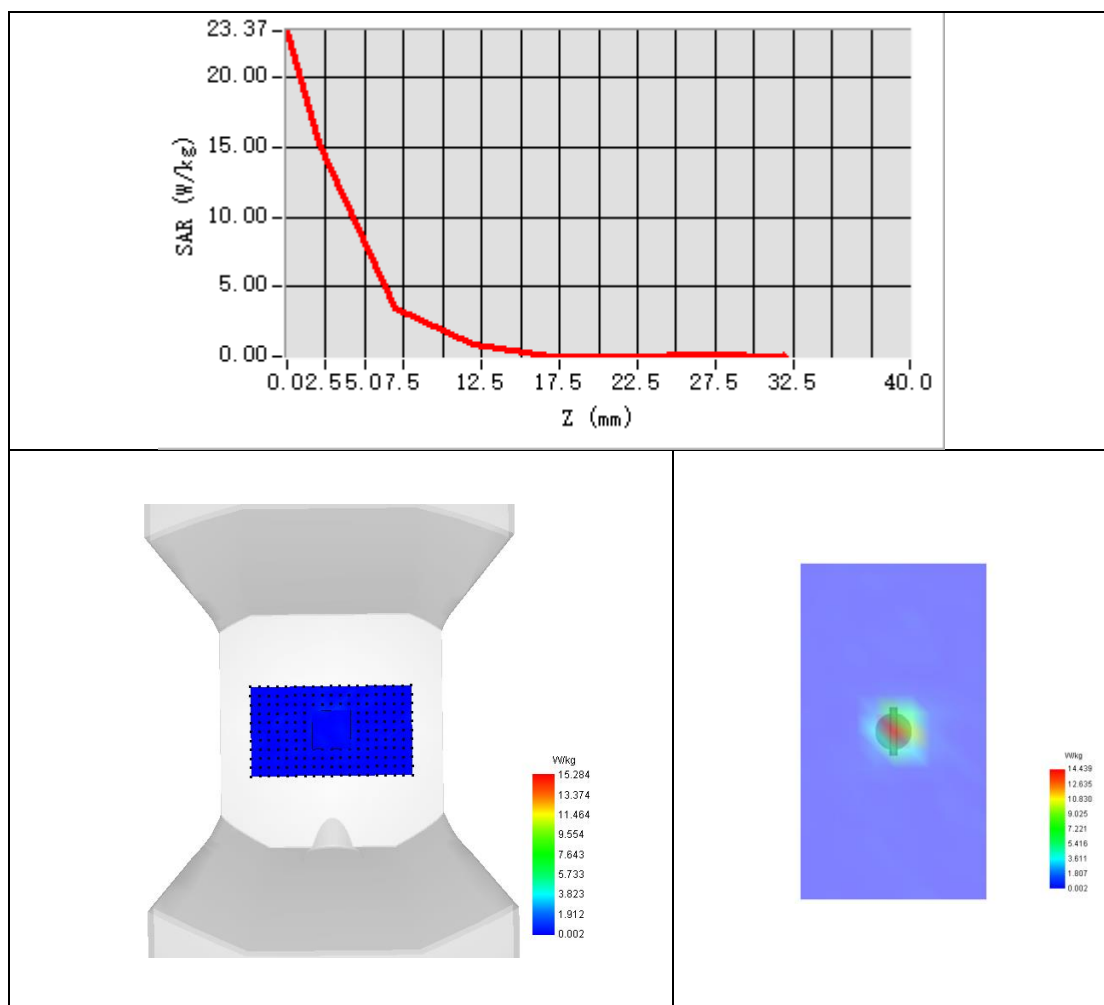



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-10-28

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	35.84
Conductivity (S/m)	5.22
Probe	SN 04/22 EPGO364
ConvF	1.73
Crest factor:	1:1

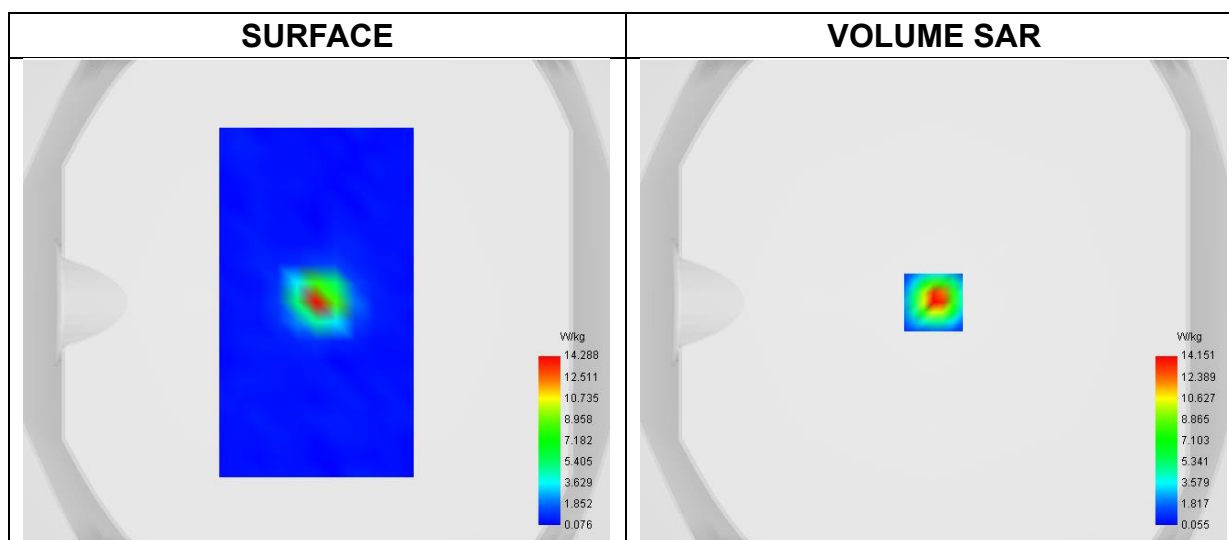


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 24.28 W/kg

SAR 10g (W/Kg)	2.412
SAR 1g (W/Kg)	7.863



Z Axis Scan

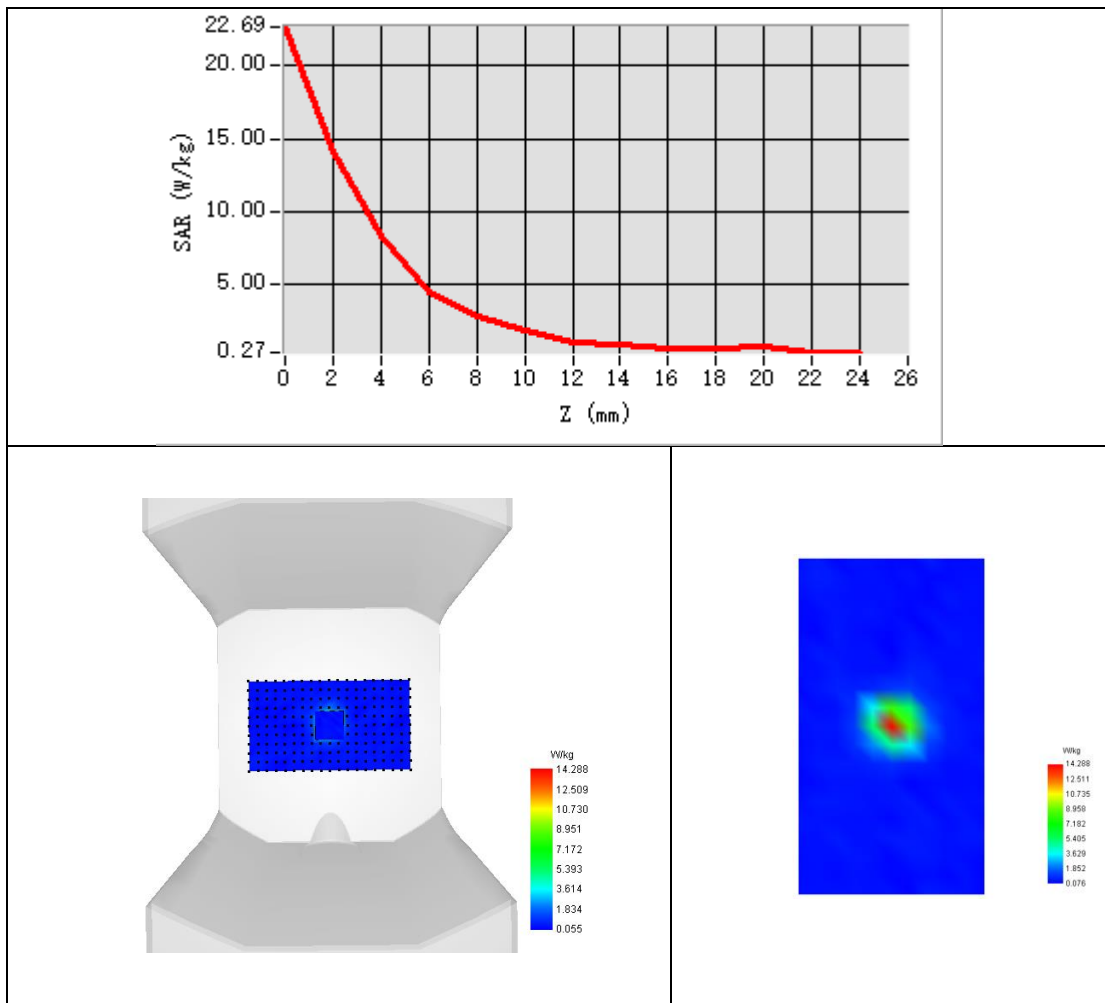



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2023-11-05

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	36.35
Conductivity (S/m)	5.30
Probe	SN 04/22 EPGO364
ConvF	1.70
Crest factor:	1:1

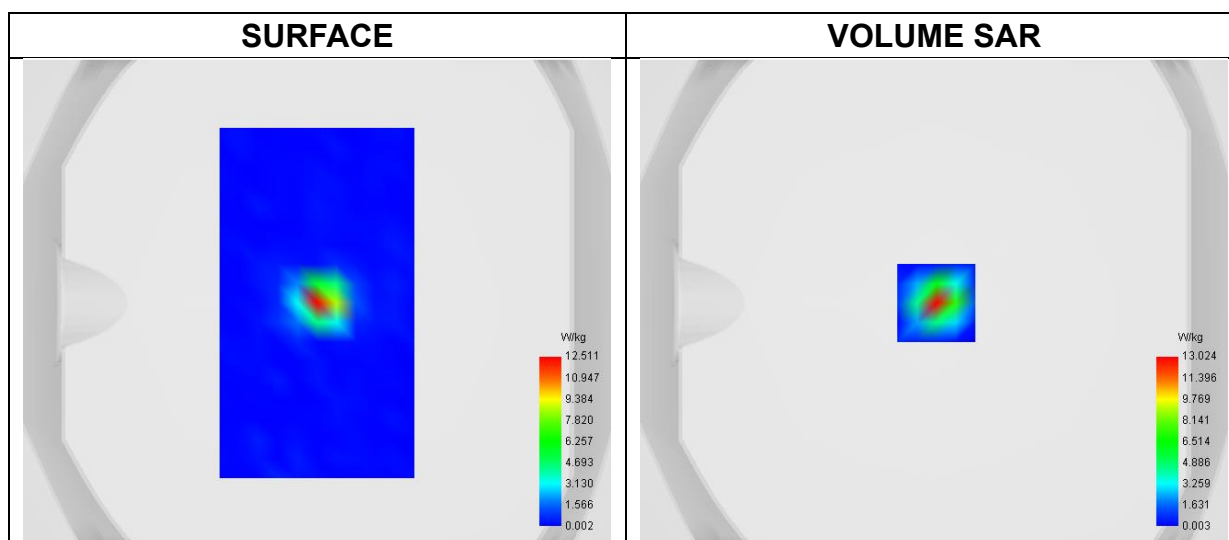


Maximum location: X=1.00, Y=0.00 ; SAR Peak: 20.71 W/kg

SAR 10g (W/Kg)	2.295
SAR 1g (W/Kg)	7.649



Z Axis Scan

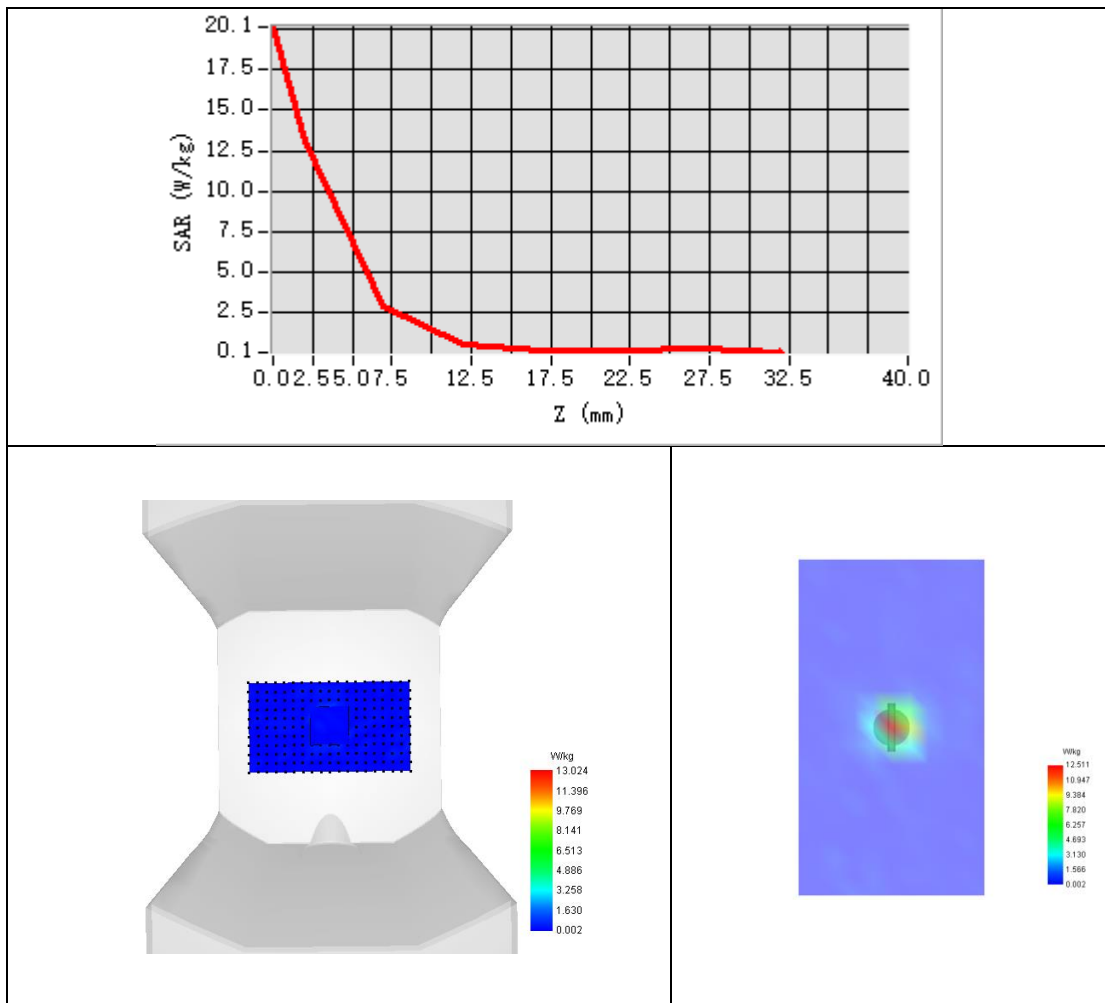




Appendix B. SAR Test Plots

Plot 1:

Test Date	2023-10-06
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Signal	TDMA (GSM)
Frequency	848.8
SAR 10g (W/Kg)	0.135
SAR 1g (W/Kg)	0.214

Maximum location: X=-54.00, Y=-41.00 ; SAR Peak: 0.38 W/kg

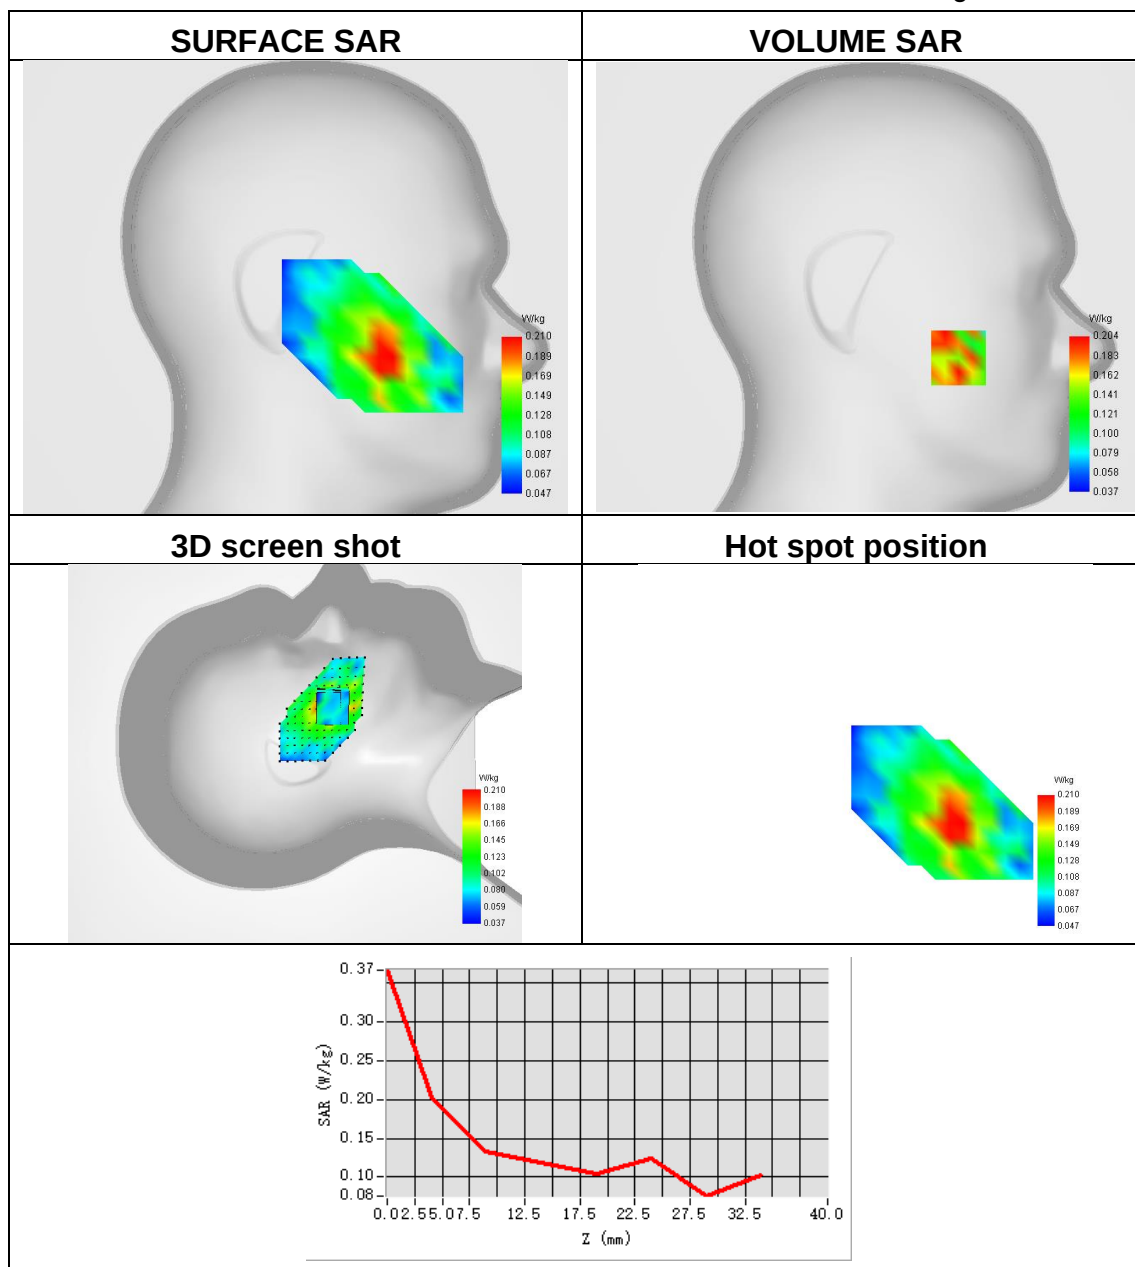




Plot 2:

Test Date	2023-10-06
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	GPRS850
Signal	TDMA (EGPRS)
Frequency	848.8
SAR 10g (W/Kg)	0.370
SAR 1g (W/Kg)	0.618

Maximum location: X=8.00, Y=-8.00 ; SAR Peak: 0.94 W/kg

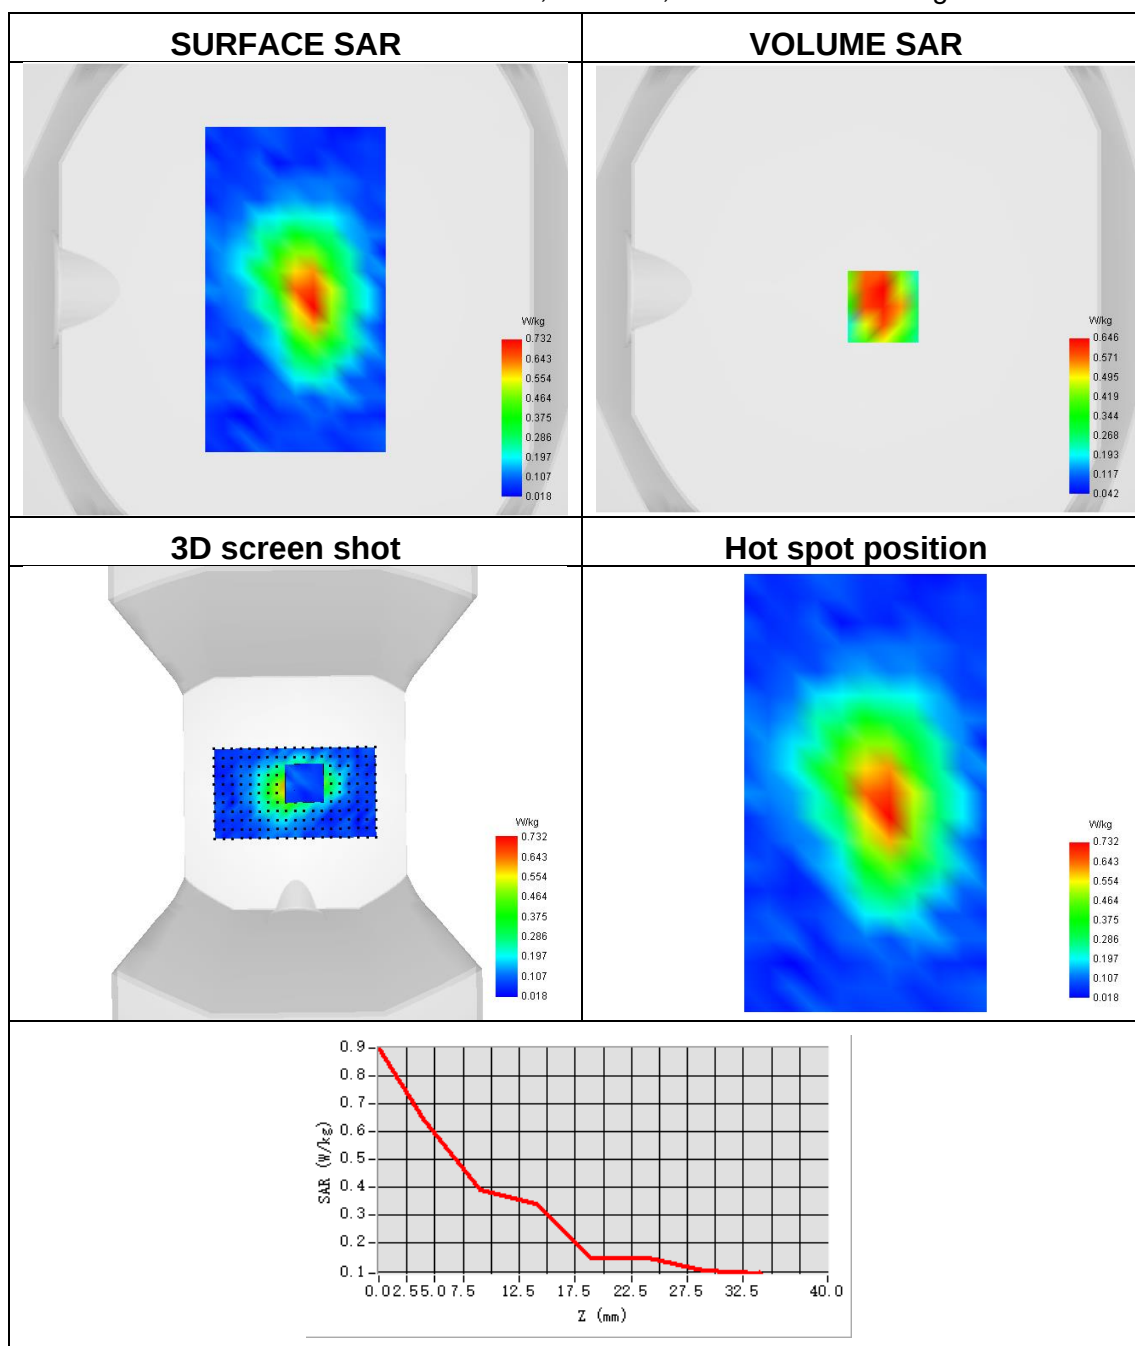




Plot 3:

Test Date	2023-10-16
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Signal	TDMA (GSM)
Frequency	1880
SAR 10g (W/Kg)	0.169
SAR 1g (W/Kg)	0.286

Maximum location: X=-64.00, Y=-40.00 ; SAR Peak: 0.51 W/kg

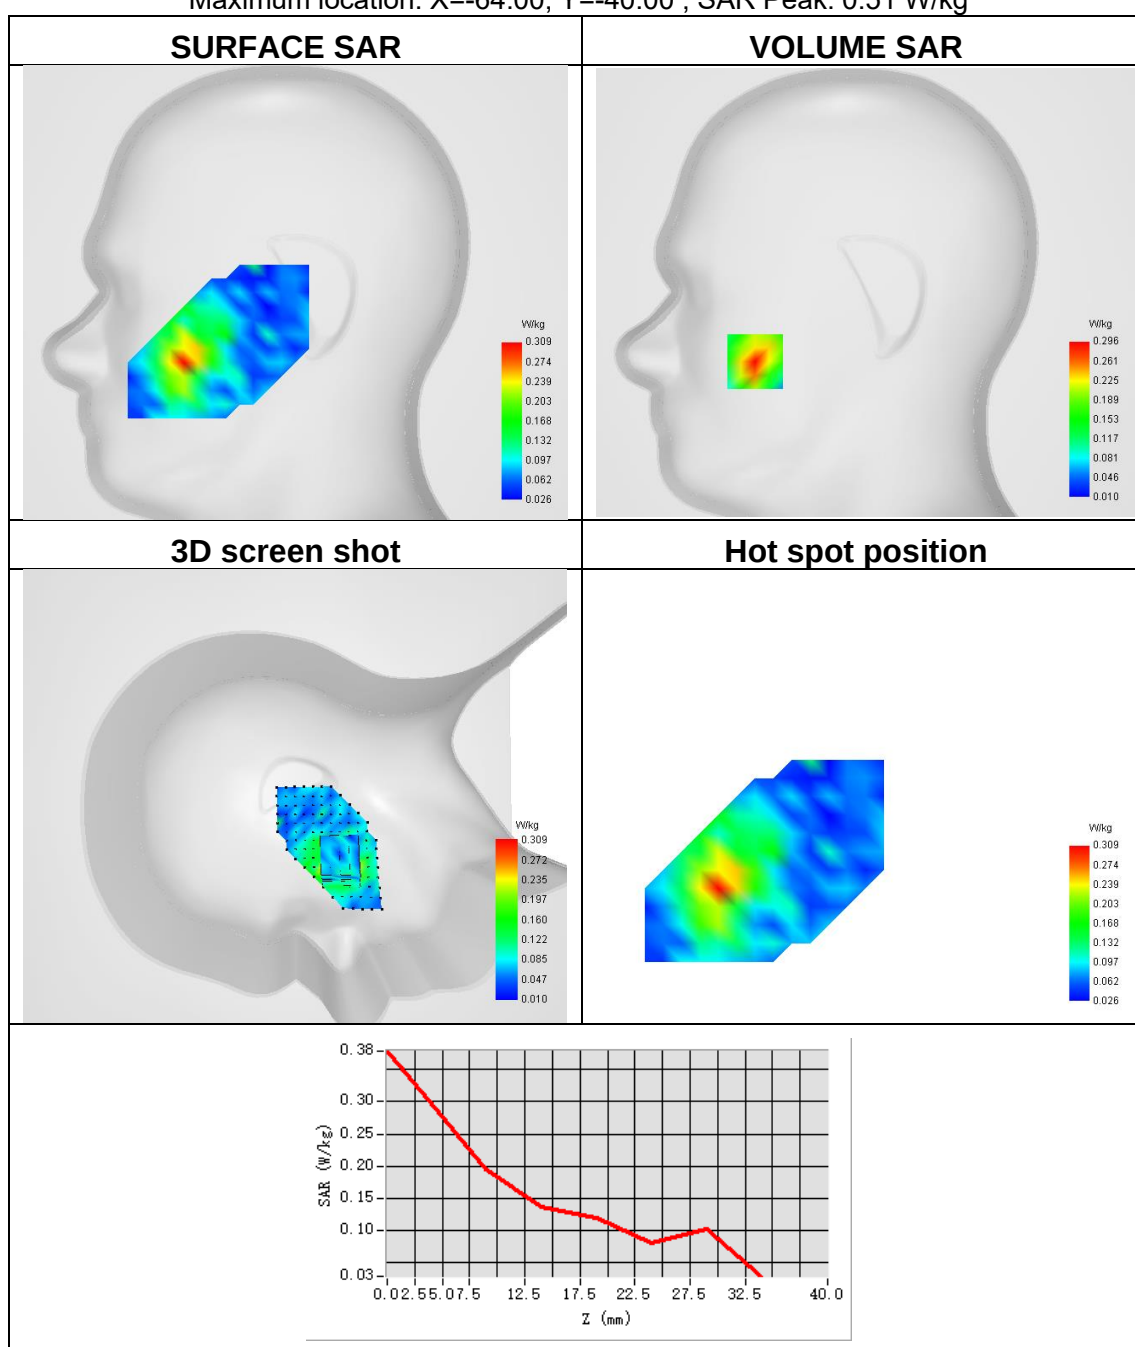




Plot 4:

Test Date	2023-10-16
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	GPRS1900
Signal	TDMA (EGPRS)
Frequency	1880
SAR 10g (W/Kg)	0.500
SAR 1g (W/Kg)	0.862

Maximum location: X=7.00, Y=-8.00 ; SAR Peak: 1.30 W/kg

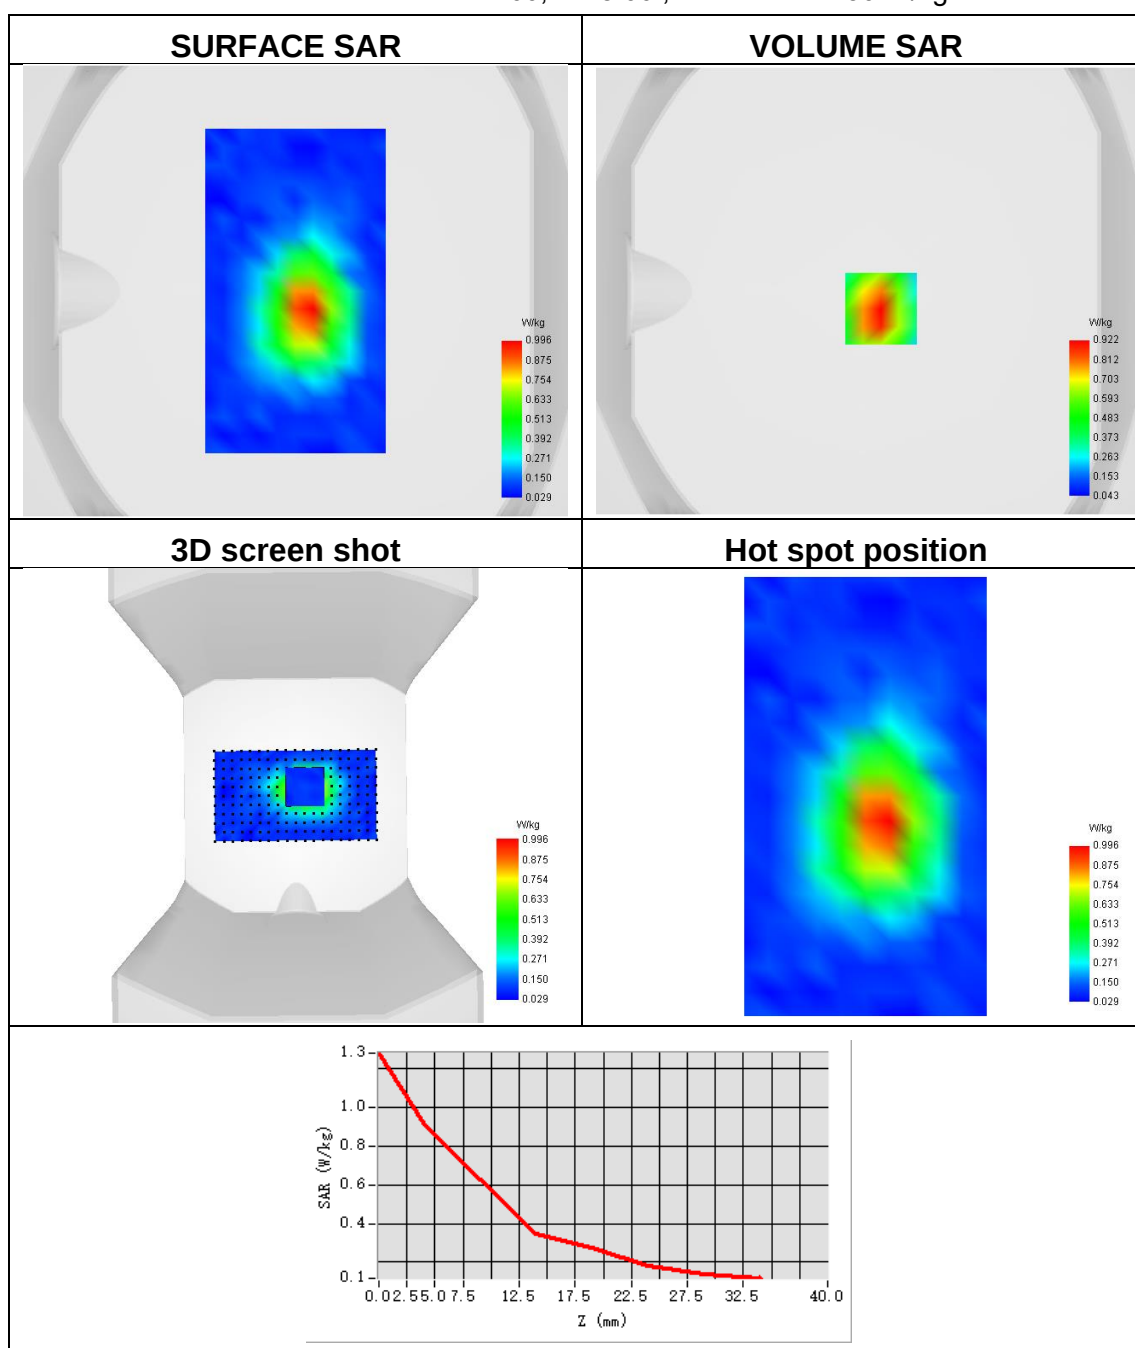




Plot 5:

Test Date	2023-10-16
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1852.4
SAR 10g (W/Kg)	0.268
SAR 1g (W/Kg)	0.466

Maximum location: X=-65.00, Y=-42.00 ; SAR Peak: 0.75 W/kg

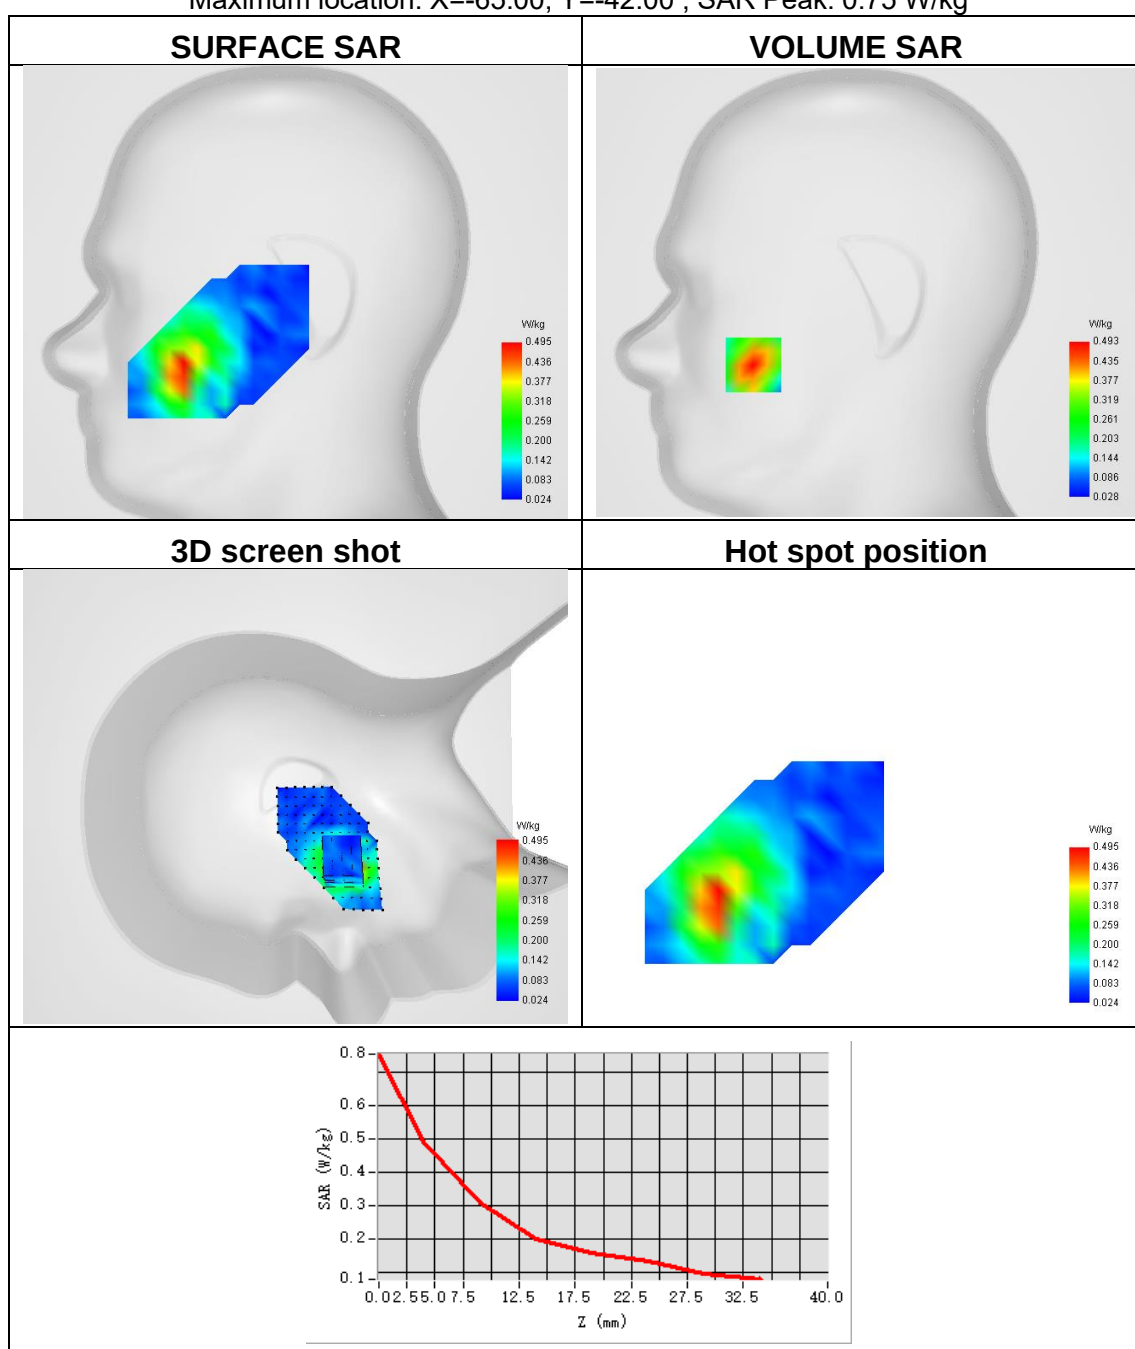




Plot 6:

Test Date	2023-10-16
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1852.4
SAR 10g (W/Kg)	0.653
SAR 1g (W/Kg)	1.118

Maximum location: X=6.00, Y=-6.00 ; SAR Peak: 1.71 W/kg

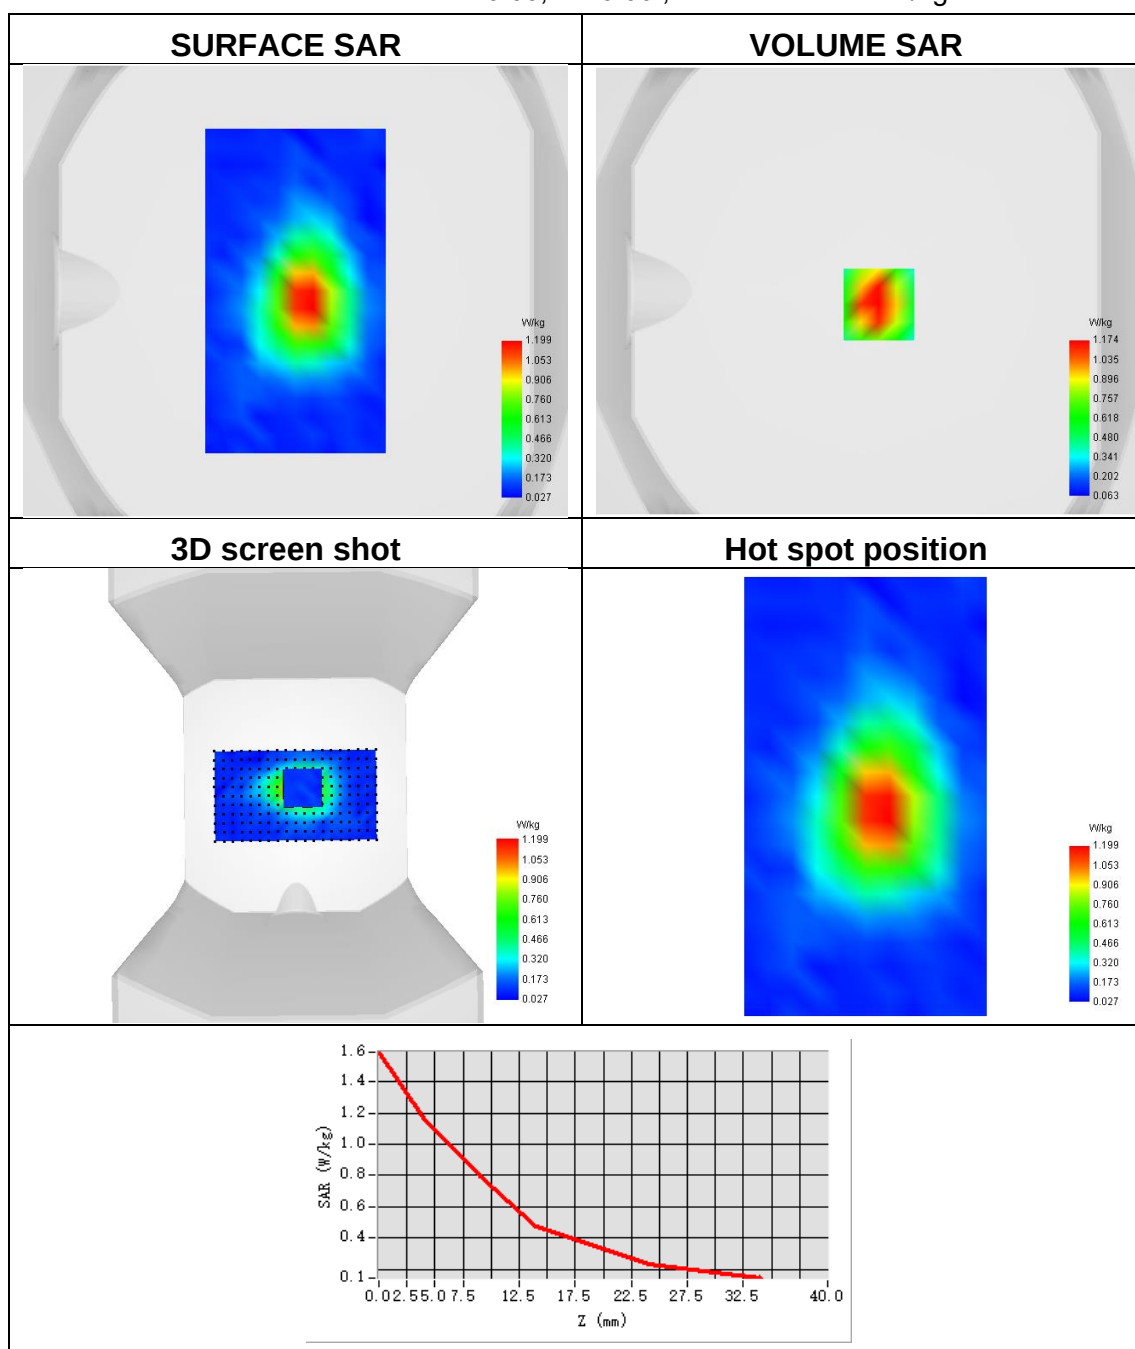




Plot 7:

Test Date	2023-10-15
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1752.4
SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.294

Maximum location: X=-67.00, Y=-45.00 ; SAR Peak: 0.59 W/kg

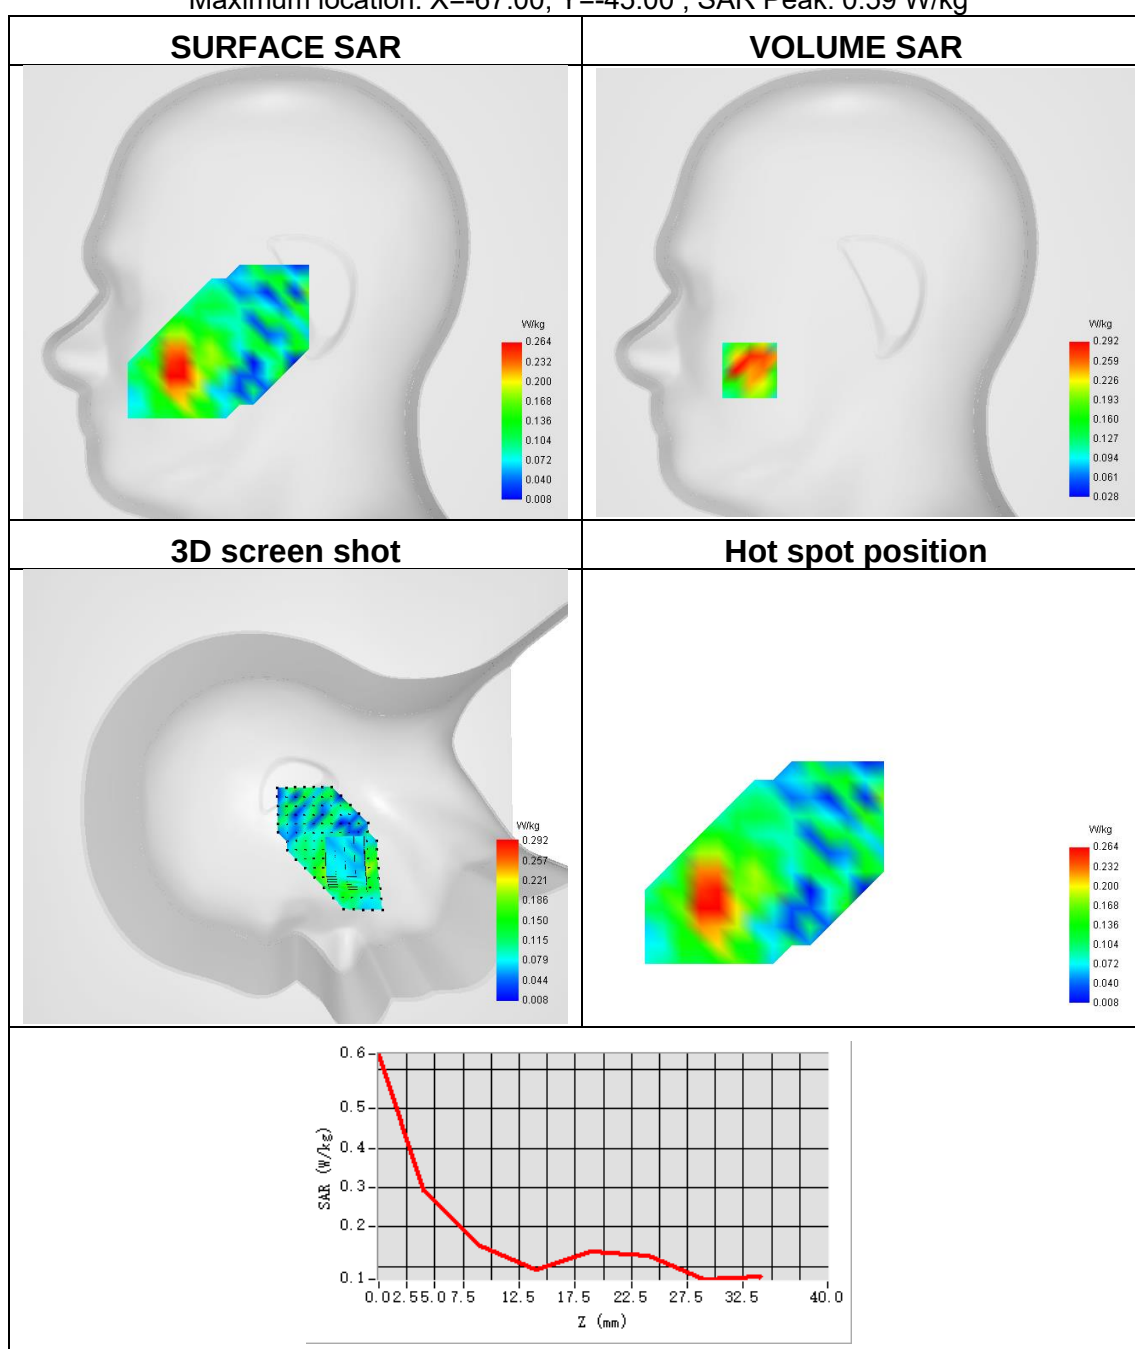




Plot 8:

Test Date	2023-10-15
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1752.4
SAR 10g (W/Kg)	0.495
SAR 1g (W/Kg)	0.880

Maximum location: X=1.00, Y=-8.00 ; SAR Peak: 1.42 W/kg

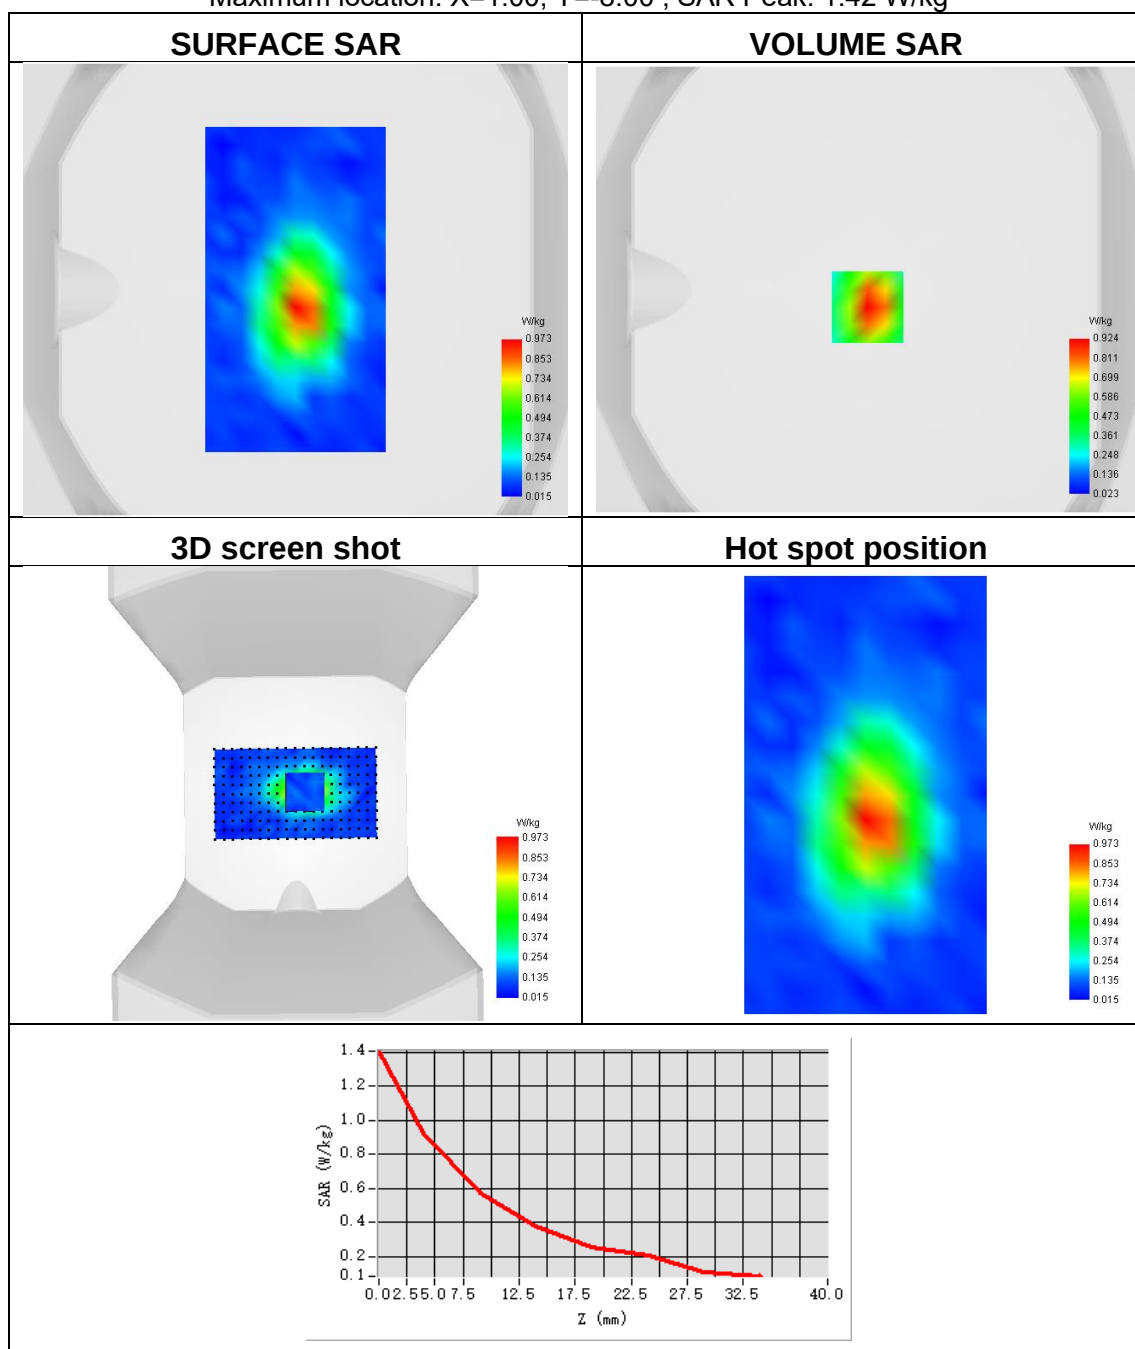




Plot 9:

Test Date	2023-10-06
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.181
SAR 1g (W/Kg)	0.249

Maximum location: X=-48.00, Y=-32.00 ; SAR Peak: 0.36 W/kg

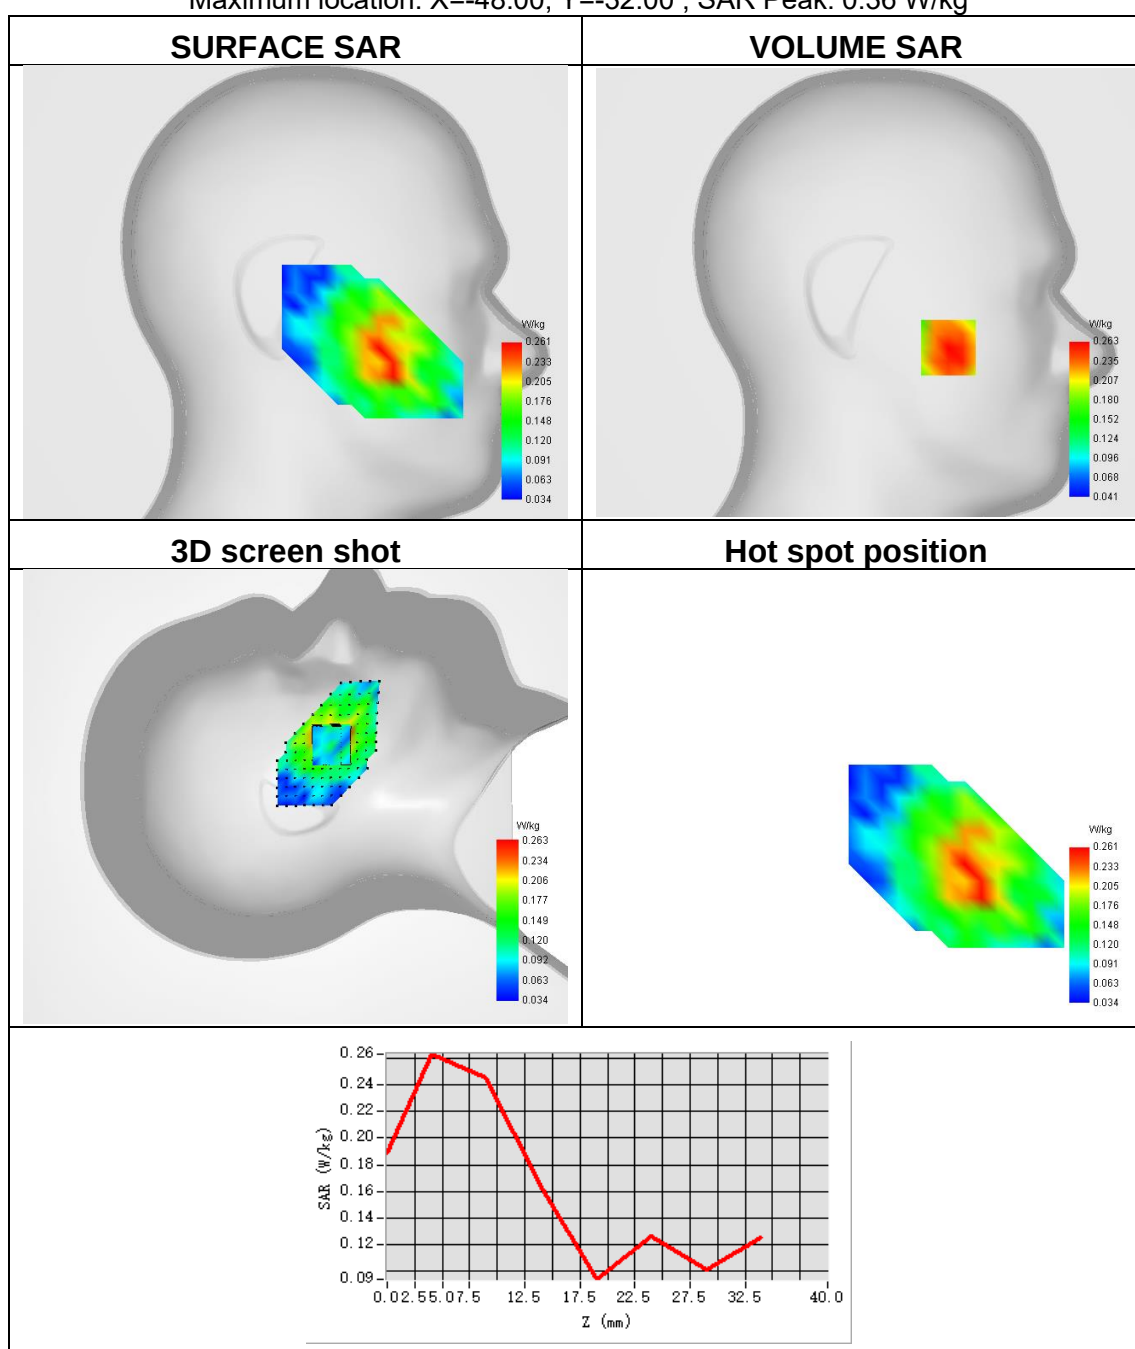




Plot 10:

Test Date	2023-10-06
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.224
SAR 1g (W/Kg)	0.401

Maximum location: X=8.00, Y=7.00 ; SAR Peak: 0.67 W/kg

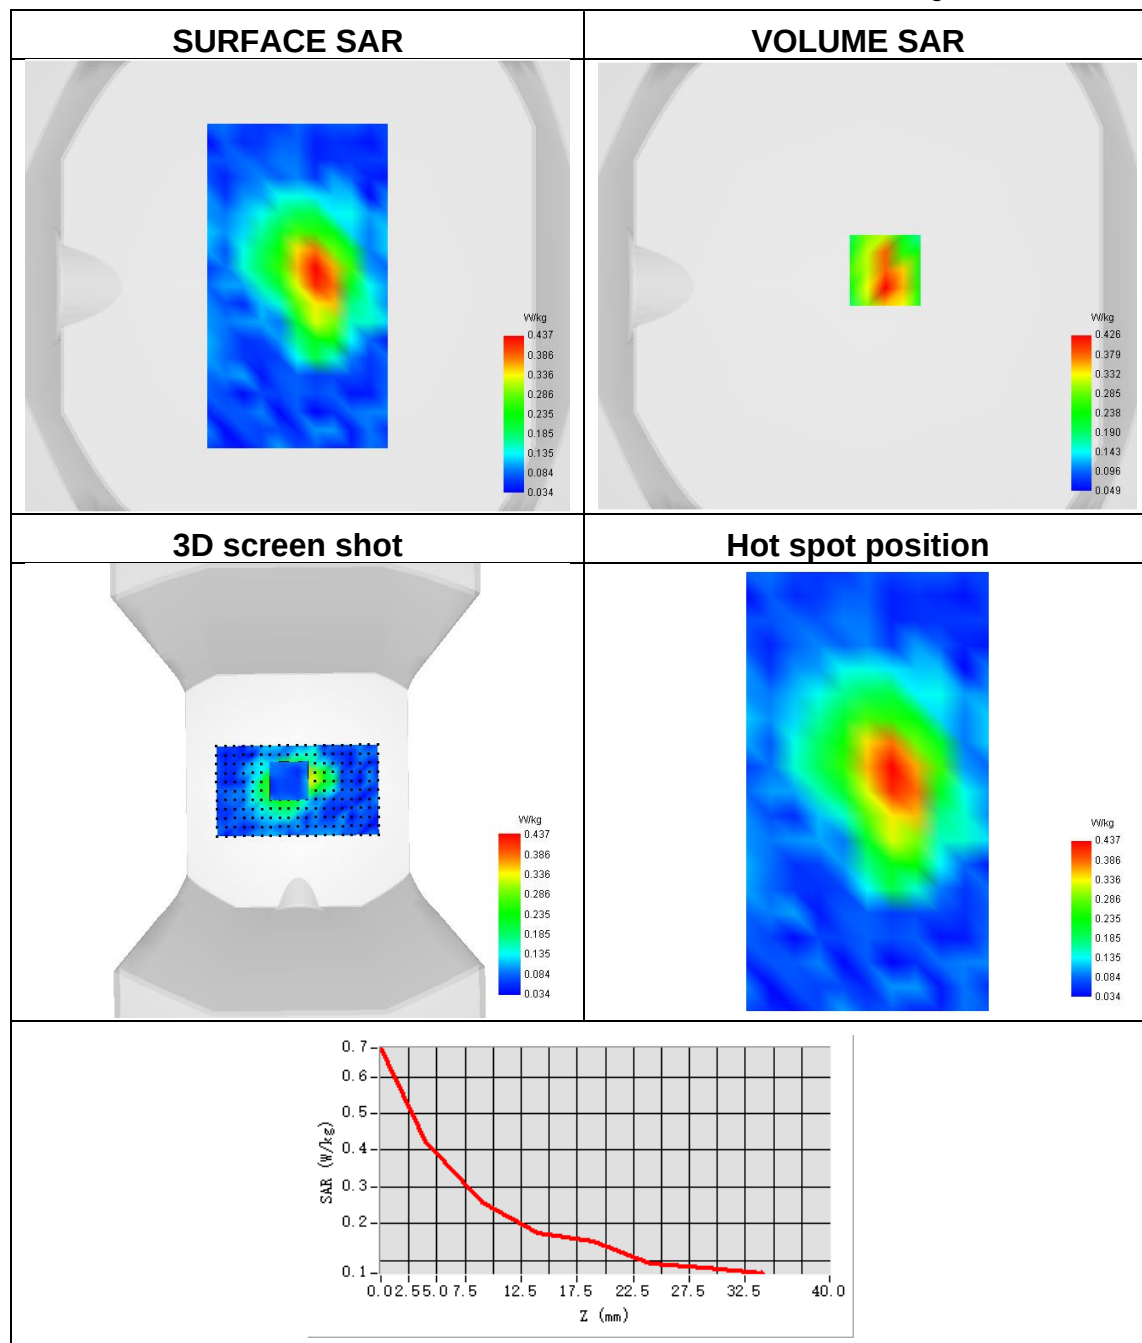




Plot 11:

Test Date	2023-10-01
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	BC0 (US Cellular)
Signal	CDMA (CDMA2000)
Frequency	824.7
SAR 10g (W/Kg)	0.049
SAR 1g (W/Kg)	0.087

Maximum location: X=-56.00, Y=-42.00 ; SAR Peak: 0.19 W/kg

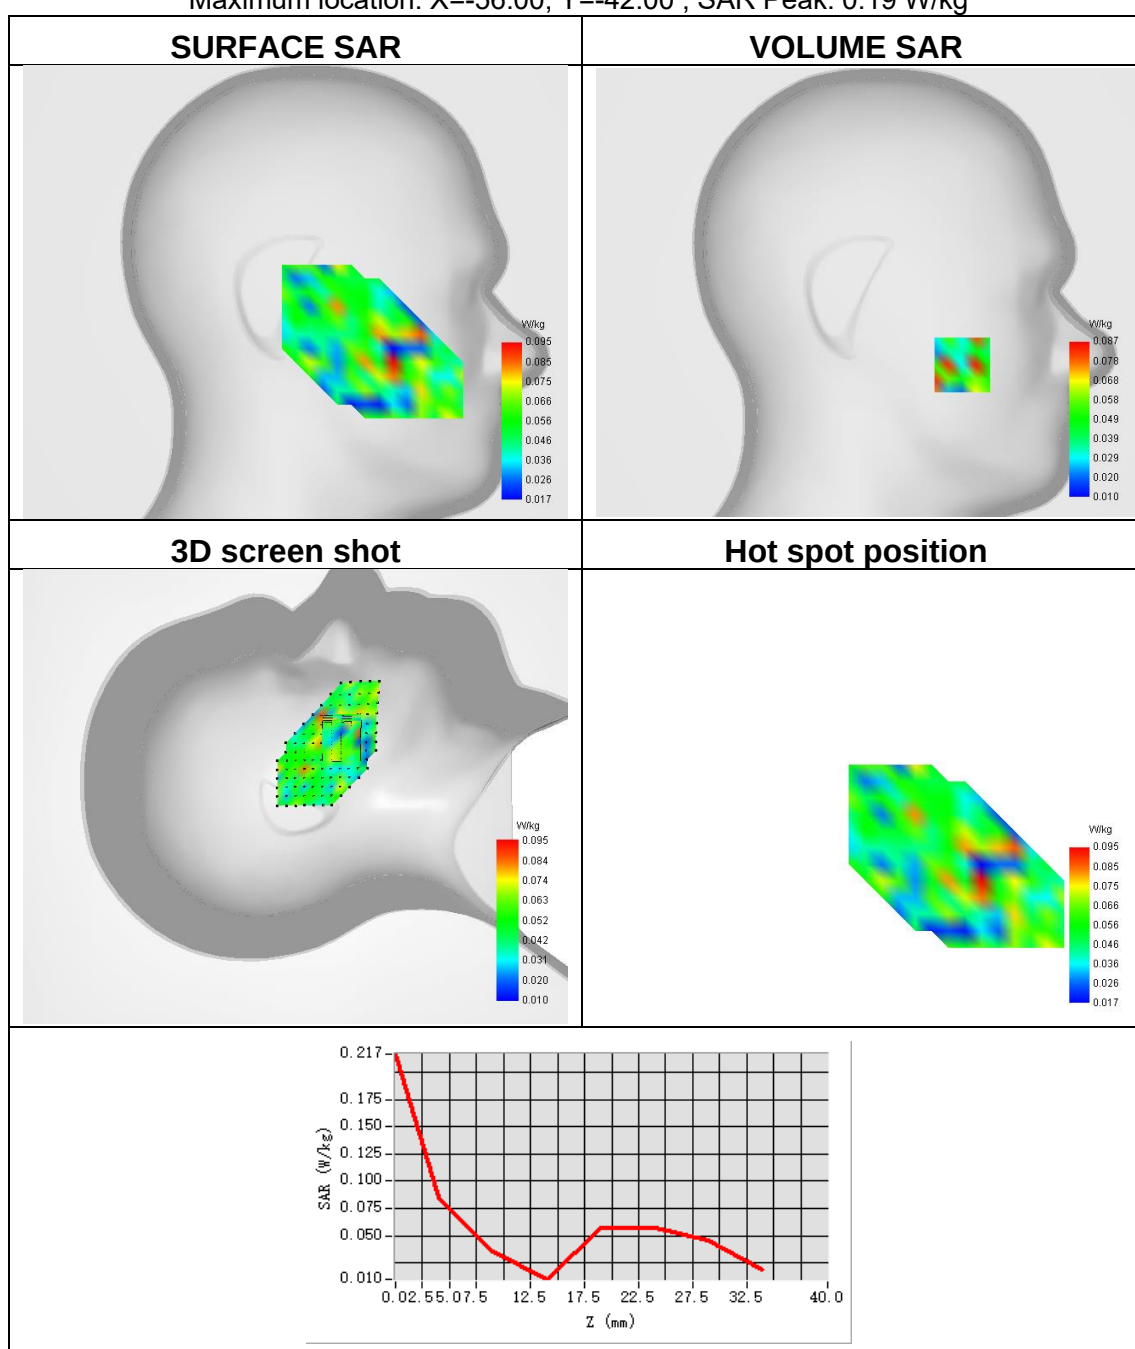




Plot 12:

Test Date	2023-10-01
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	BC0 (US Cellular)
Signal	CDMA (CDMA2000)
Frequency	824.7
SAR 10g (W/Kg)	0.045
SAR 1g (W/Kg)	0.092

Maximum location: X=-2.00, Y=-26.00 ; SAR Peak: 0.21 W/kg

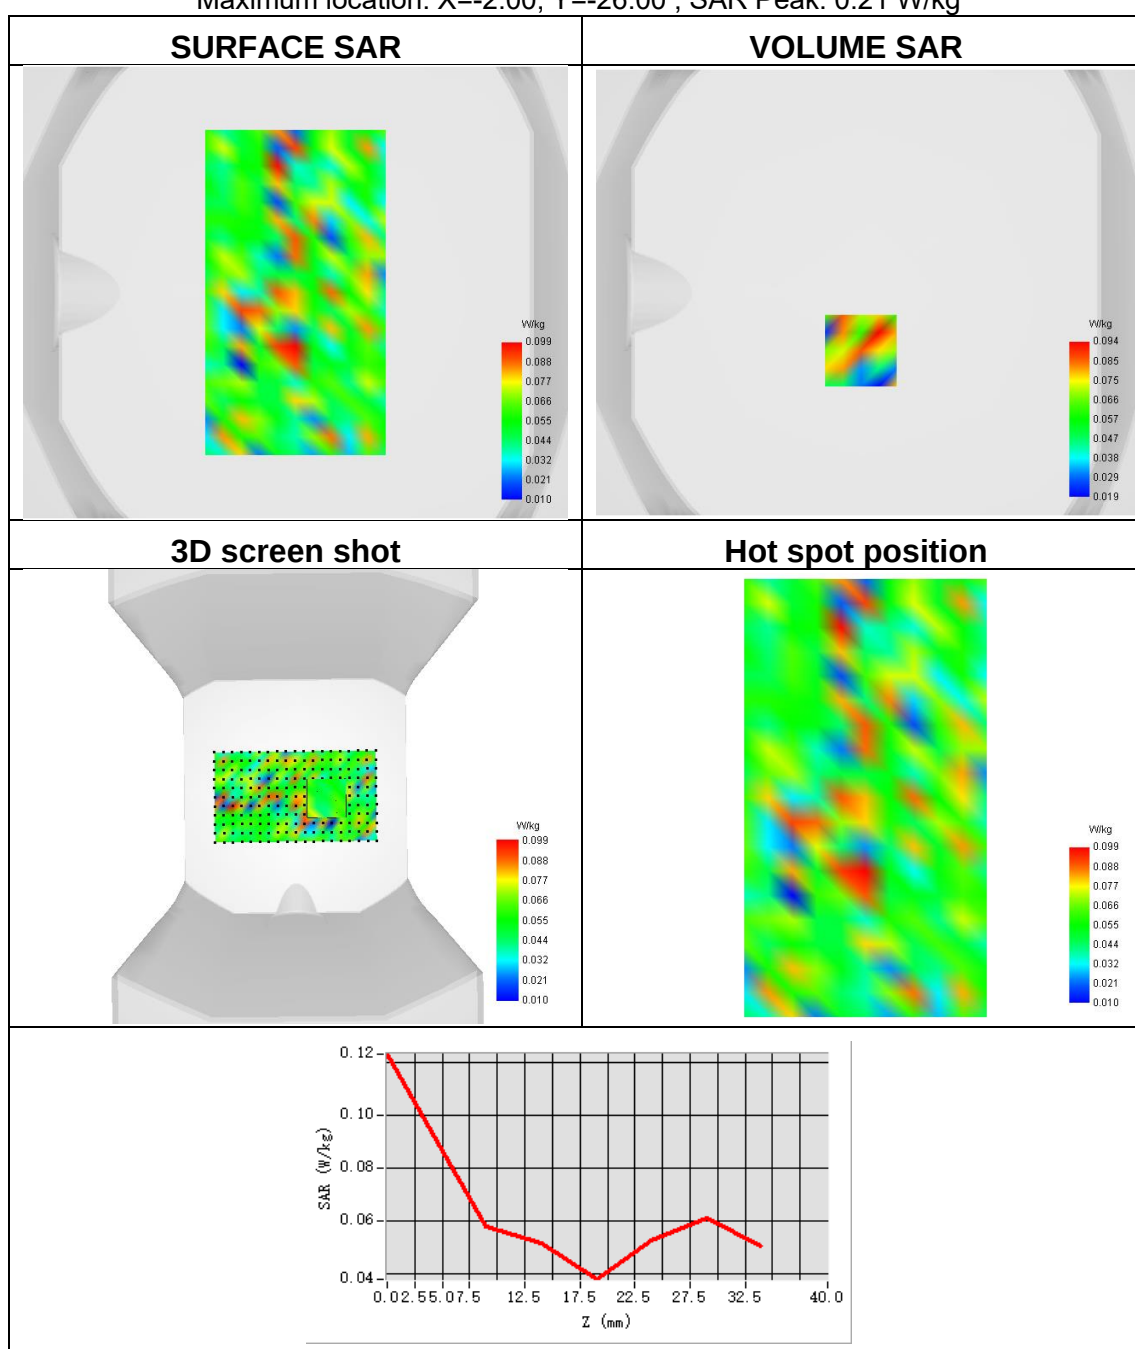




Plot 13:

Test Date	2023-10-15
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	BC1 (North American PCS)
Signal	CDMA (CDMA2000)
Frequency	1851.25
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.085

Maximum location: X=-8.00, Y=-17.00 ; SAR Peak: 0.22 W/kg

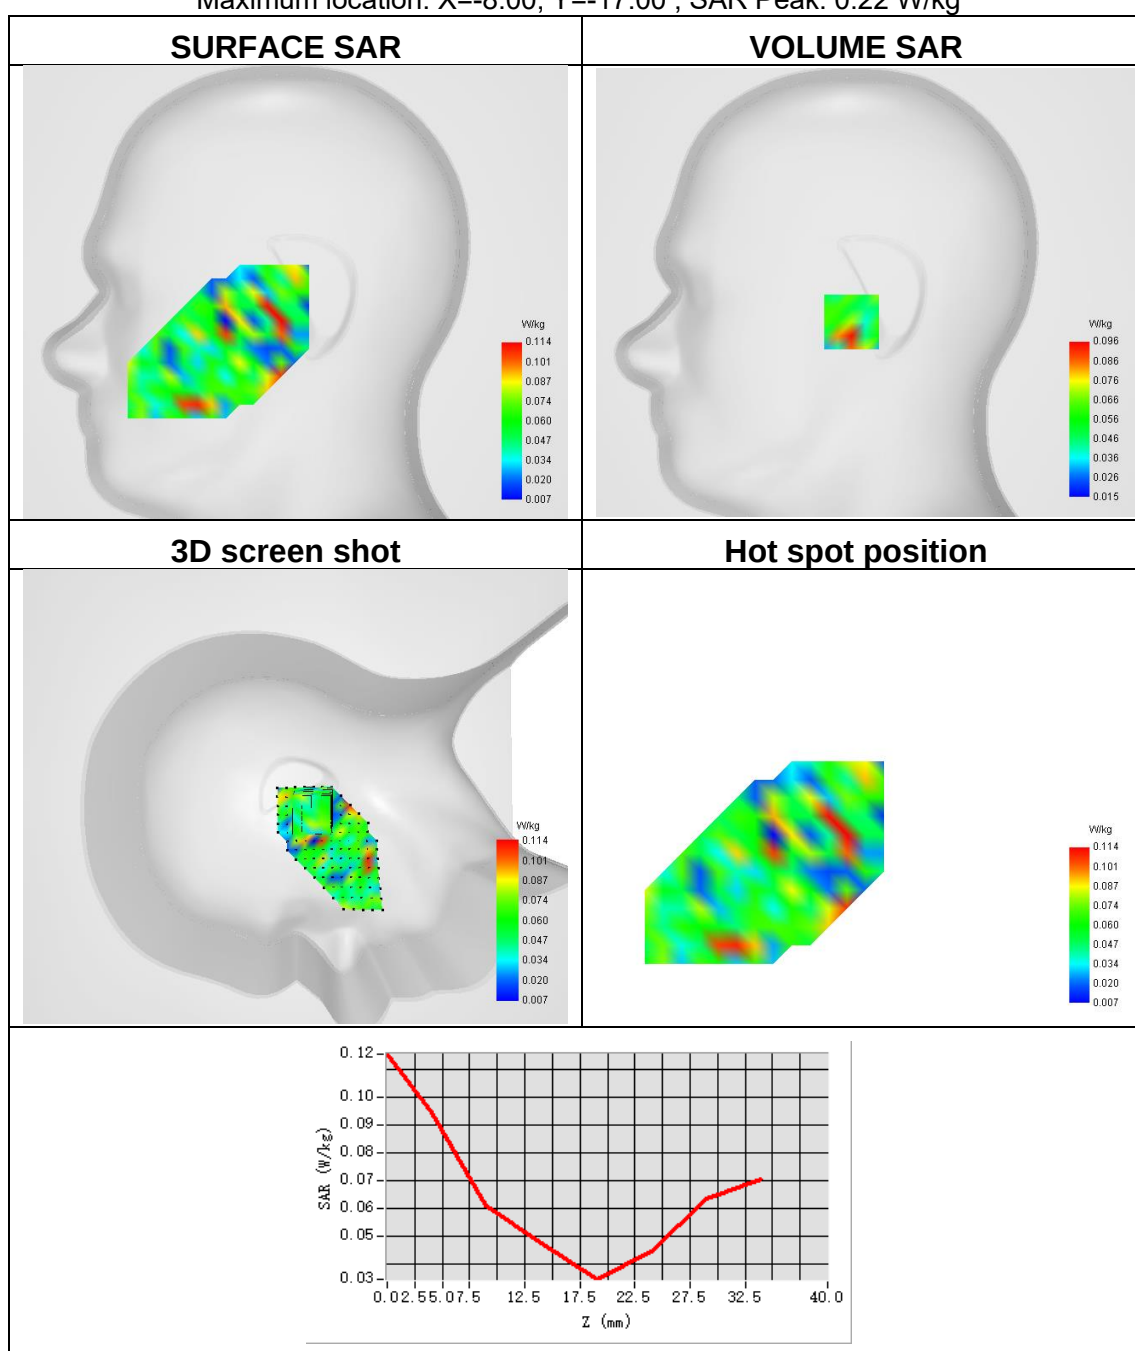




Plot 14:

Test Date	2023-10-15
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	BC1 (North American PCS)
Signal	CDMA (CDMA2000)
Frequency	1851.25
SAR 10g (W/Kg)	0.074
SAR 1g (W/Kg)	0.101

Maximum location: X=-1.00, Y=-33.00 ; SAR Peak: 0.20 W/kg

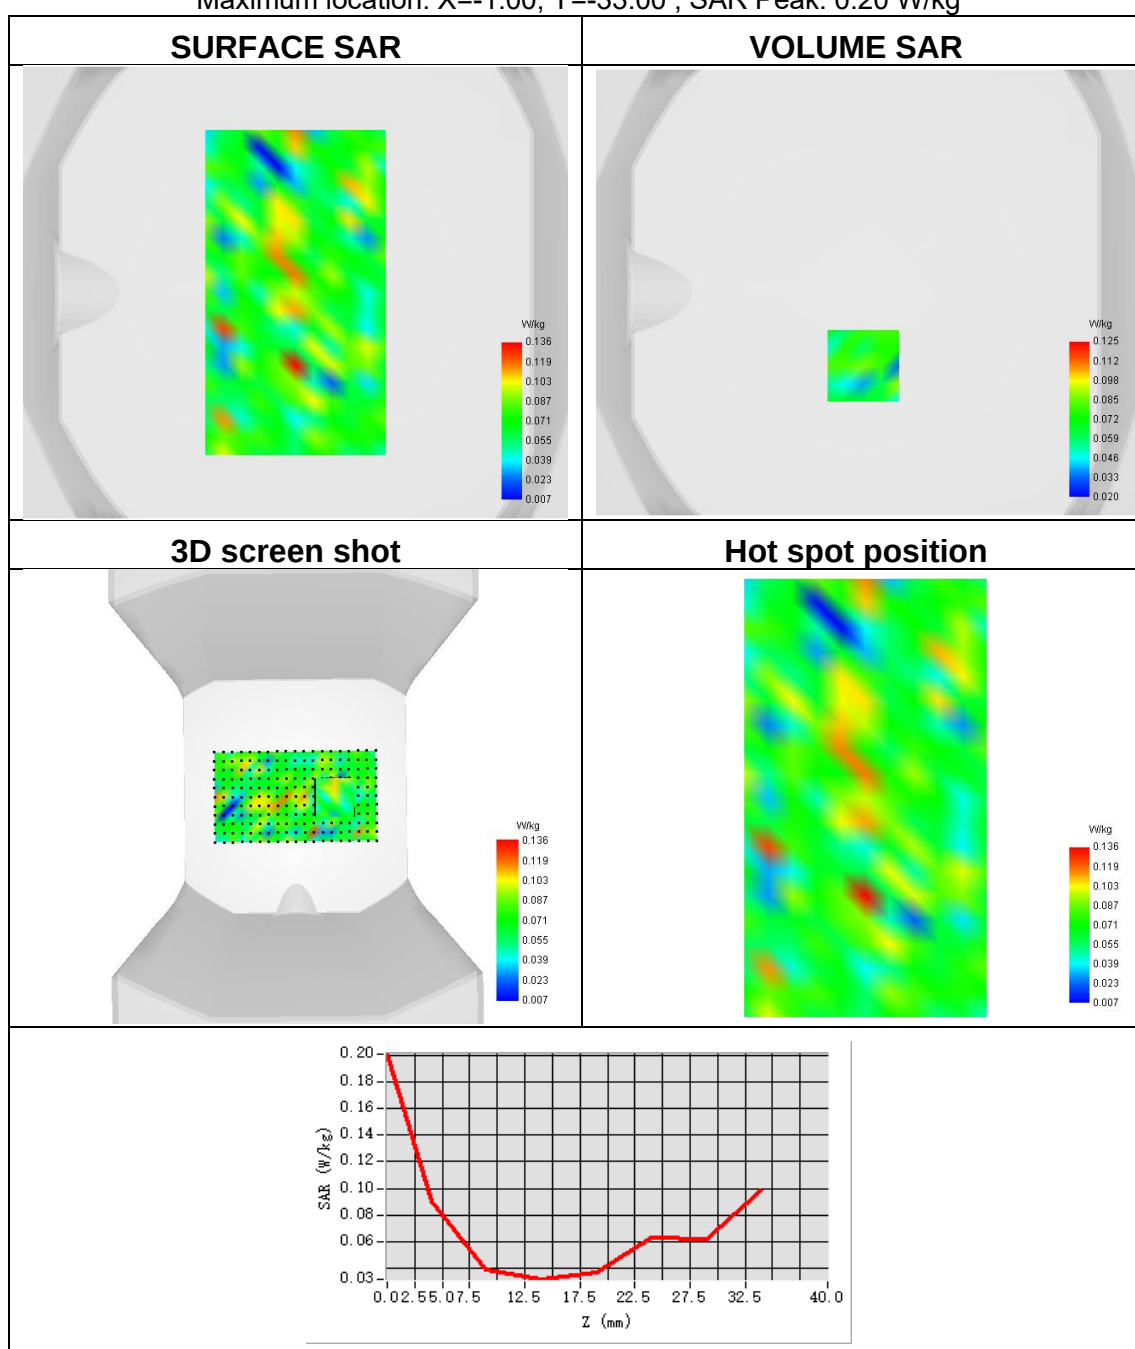




Plot 15:

Test Date	2023-10-20
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	ISM ANT 1
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.068
SAR 1g (W/Kg)	0.128

Maximum location: X=-32.00, Y=-24.00 ; SAR Peak: 0.34 W/kg

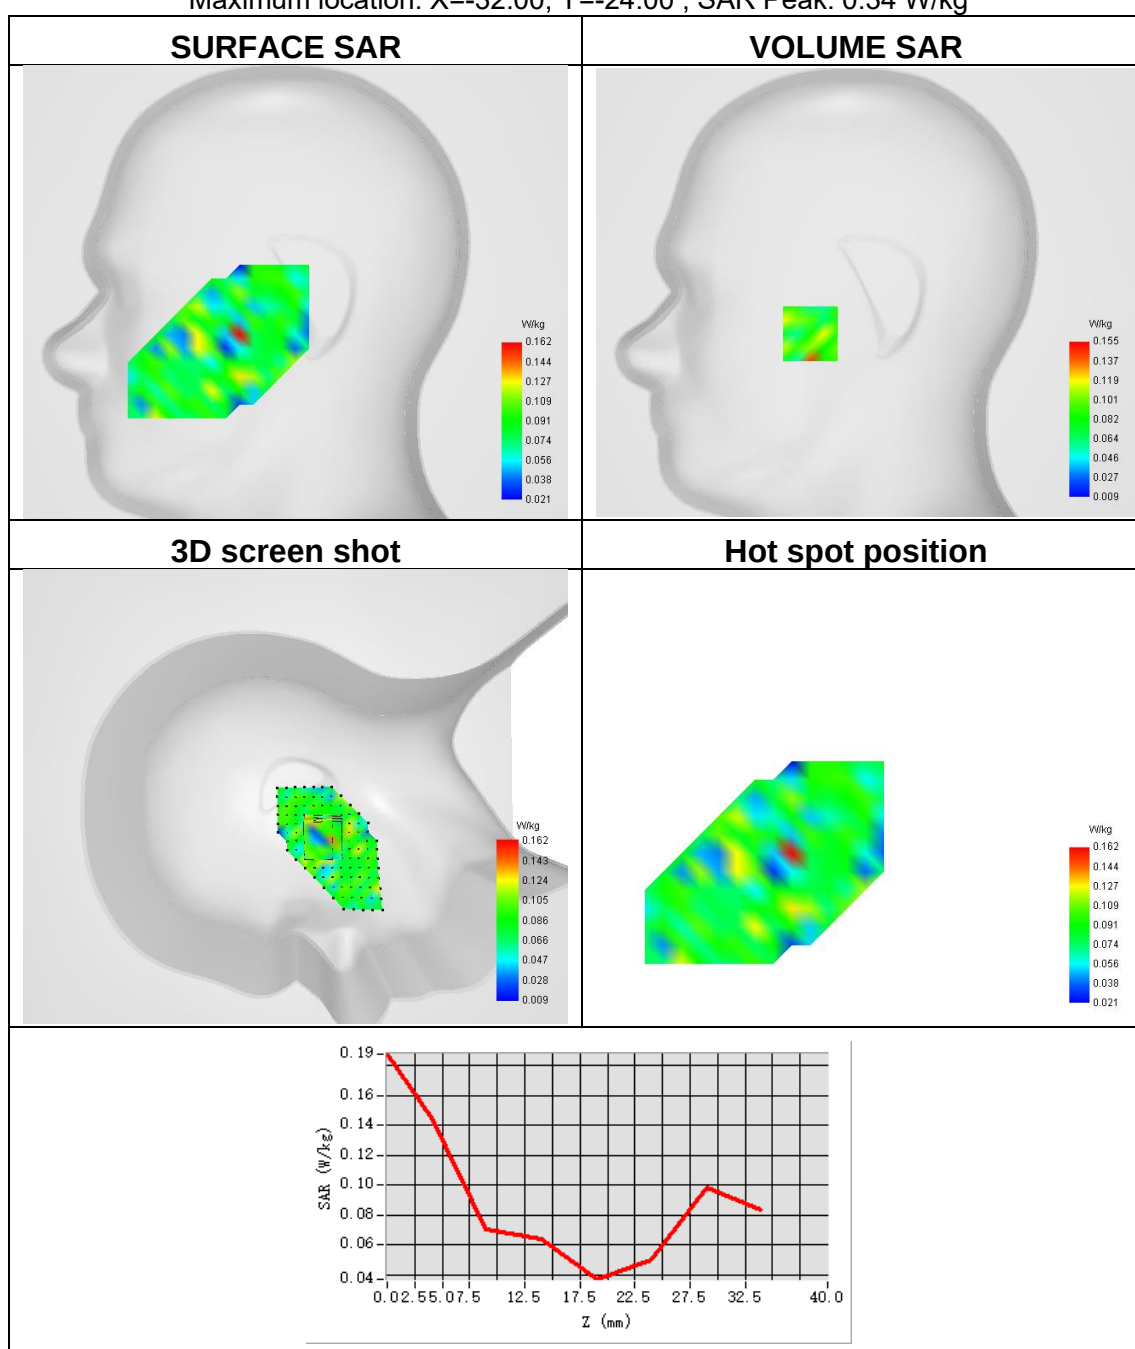




Plot 16:

Test Date	2023-10-20
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	ISM ANT 1
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.090
SAR 1g (W/Kg)	0.149

Maximum location: X=-7.00, Y=5.00 ; SAR Peak: 0.30 W/kg

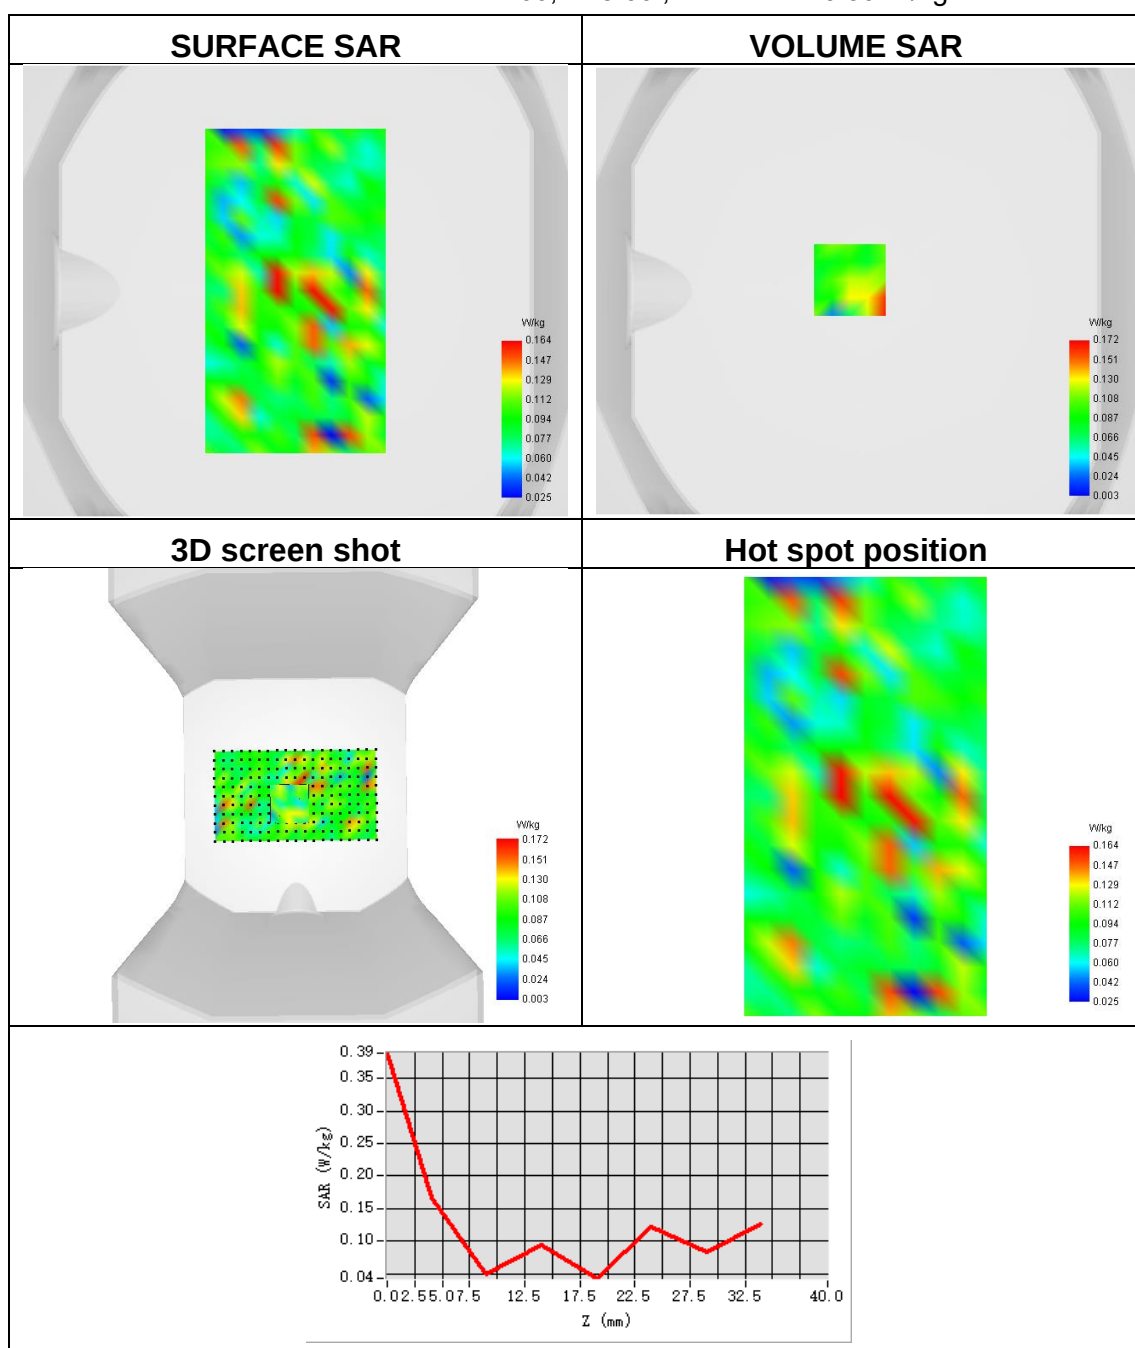




Plot 17:

Test Date	2023-10-20
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	ISM ANT 2
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.072
SAR 1g (W/Kg)	0.111

Maximum location: X=0.00, Y=-16.00 ; SAR Peak: 0.37 W/kg

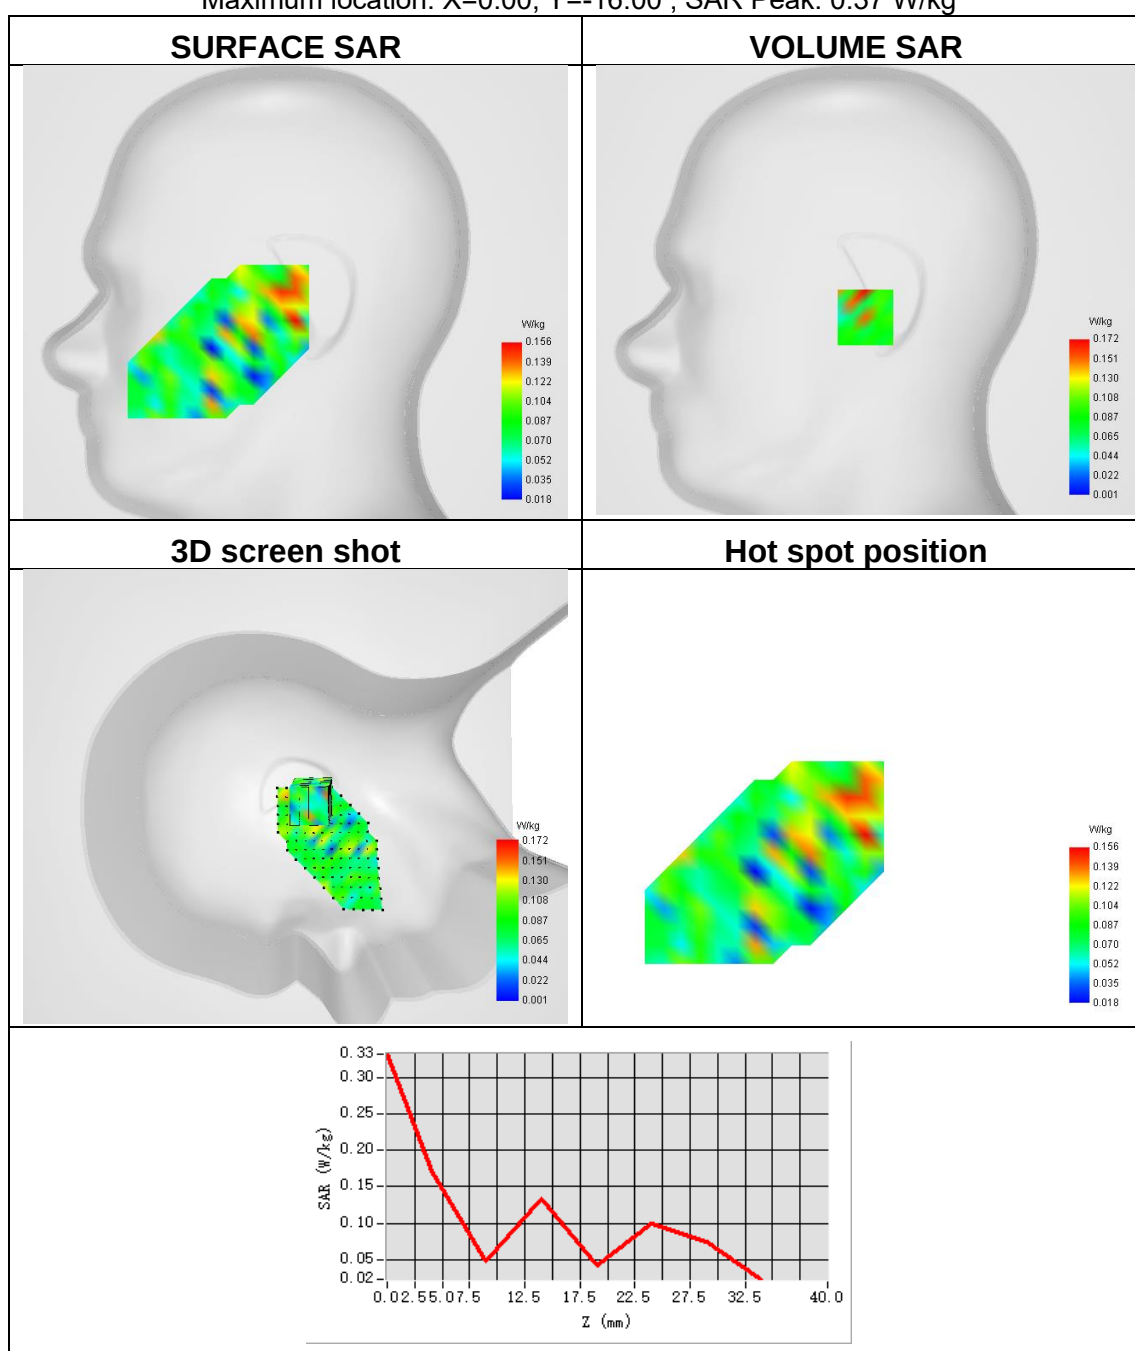




Plot 18:

Test Date	2023-10-20
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11 n-HT40 ANT 1
Signal	IEEE 802.11
Frequency	2412
SAR 10g (W/Kg)	0.078
SAR 1g (W/Kg)	0.134

Maximum location: X=9.00, Y=40.00 ; SAR Peak: 0.24 W/kg

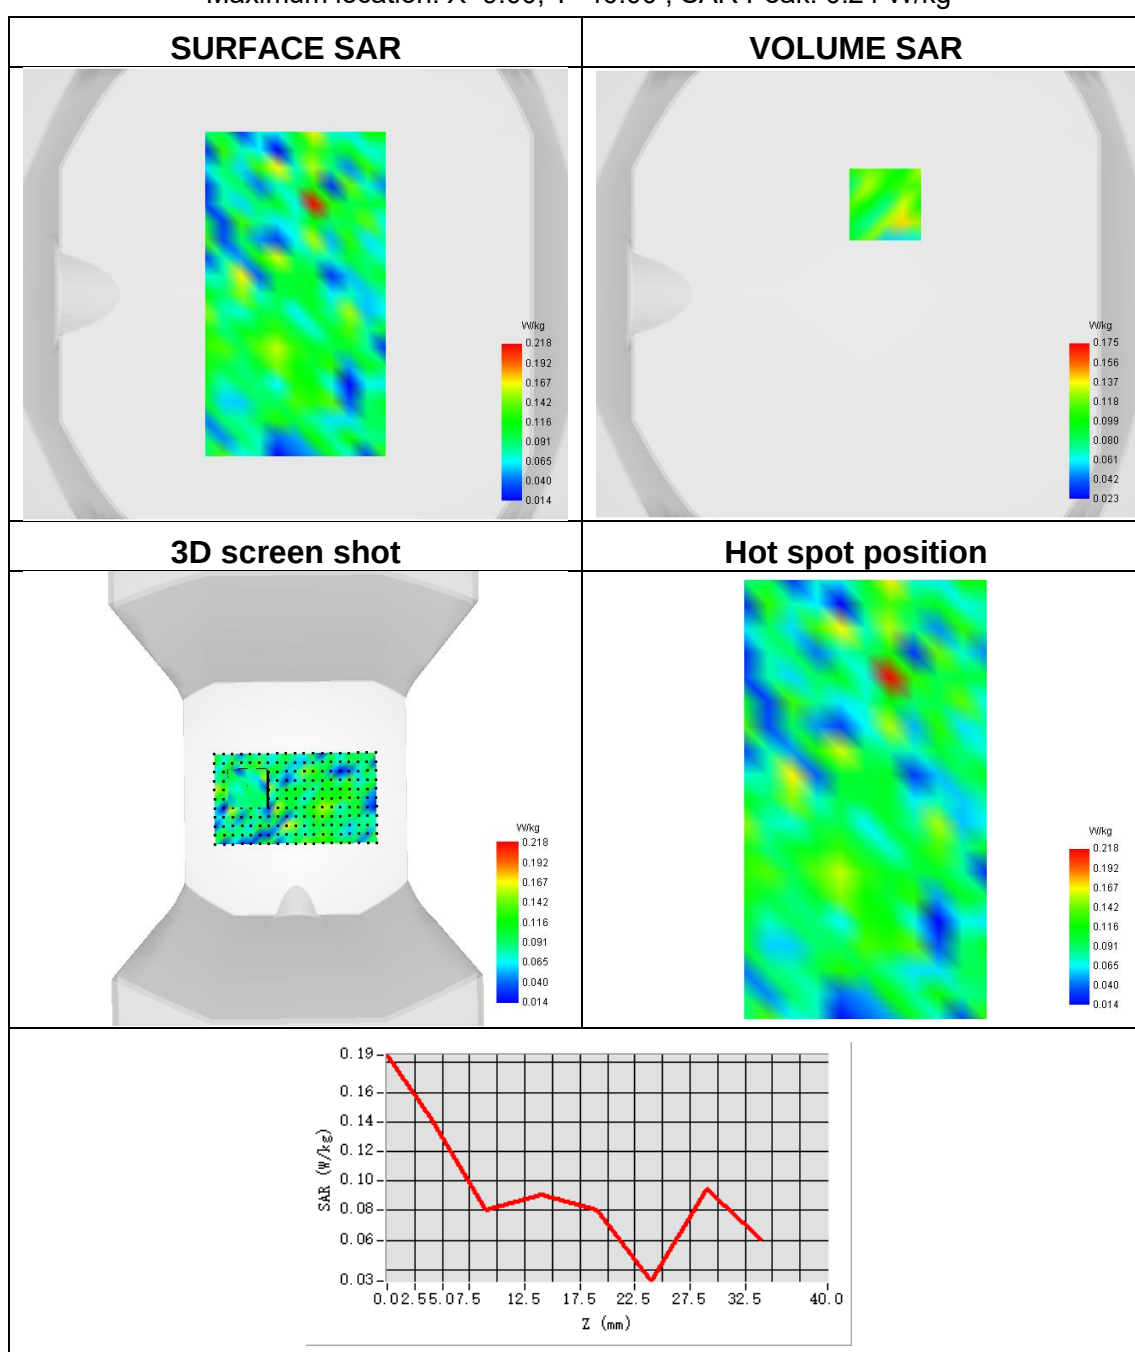




Plot 19:

Test Date	2023-10-29
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	ISM MIMO ANT 1
Signal	IEEE 802.11 ax
Frequency	2412
SAR 10g (W/Kg)	0.029
SAR 1g (W/Kg)	0.077

Maximum location: X=-9.00, Y=2.00 ; SAR Peak: 0.25 W/kg

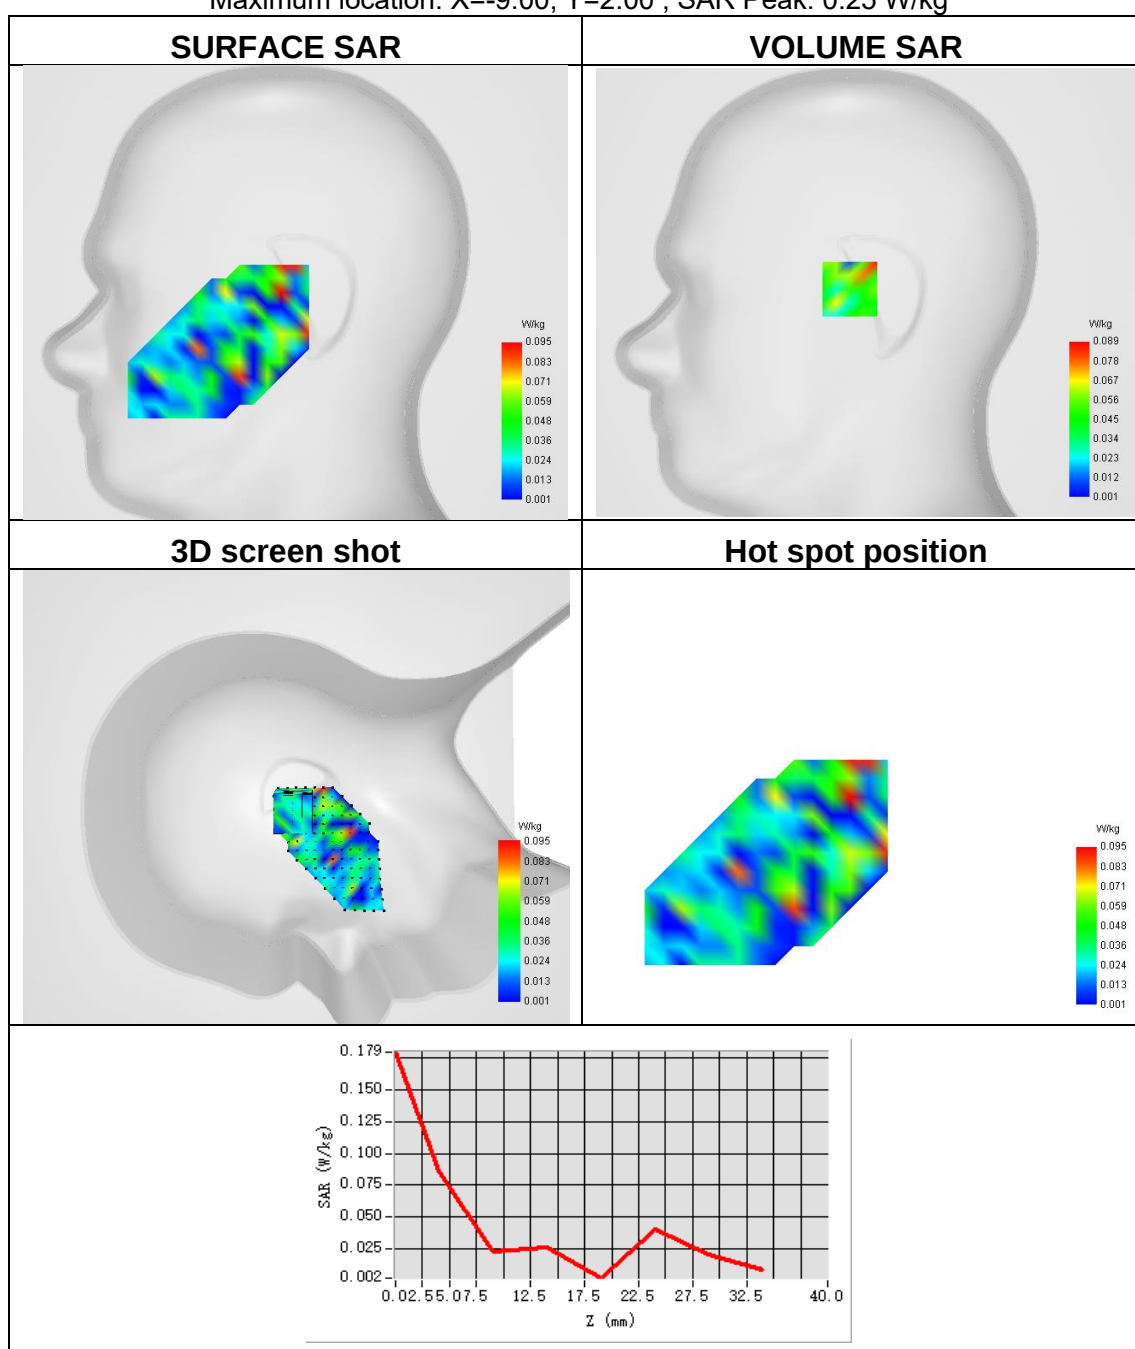




Plot 20:

Test Date	2023-10-29
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	ISM MIMO ANT 1
Signal	IEEE 802.11 ax
Frequency	2412
SAR 10g (W/Kg)	0.030
SAR 1g (W/Kg)	0.071

Maximum location: X=11.00, Y=32.00 ; SAR Peak: 0.20 W/kg

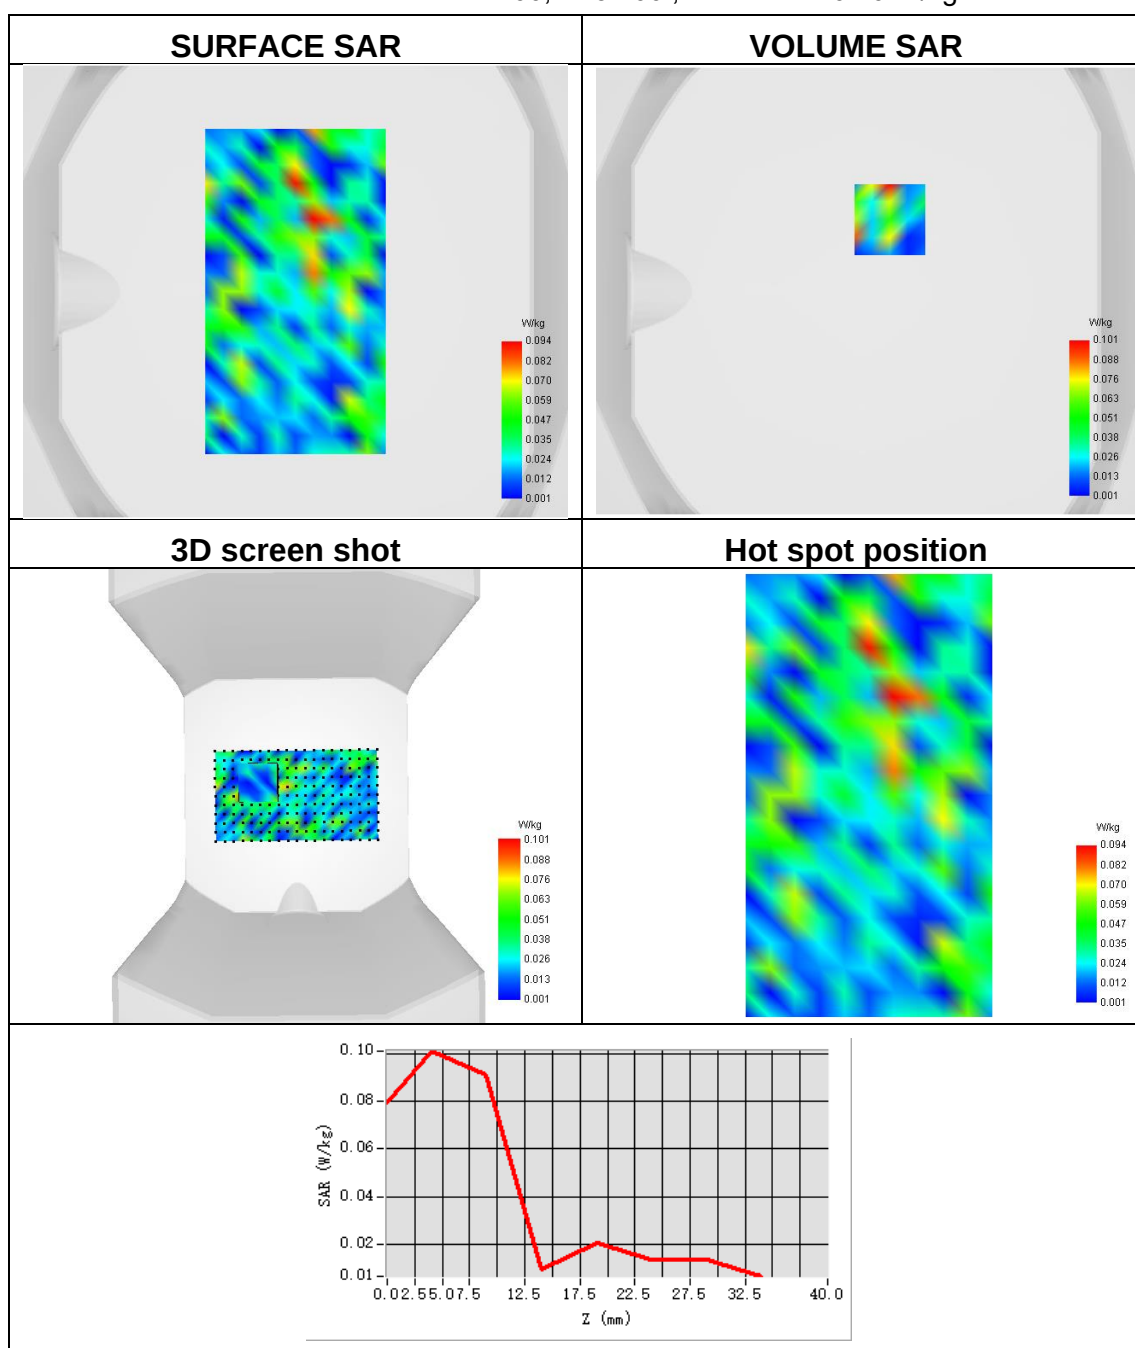




Plot 21:

Test Date	2023-10-29
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	ISM MIMO ANT 2
Signal	IEEE 802.11 ax
Frequency	2412
SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.084

Maximum location: X=3.00, Y=-6.00 ; SAR Peak: 0.33 W/kg

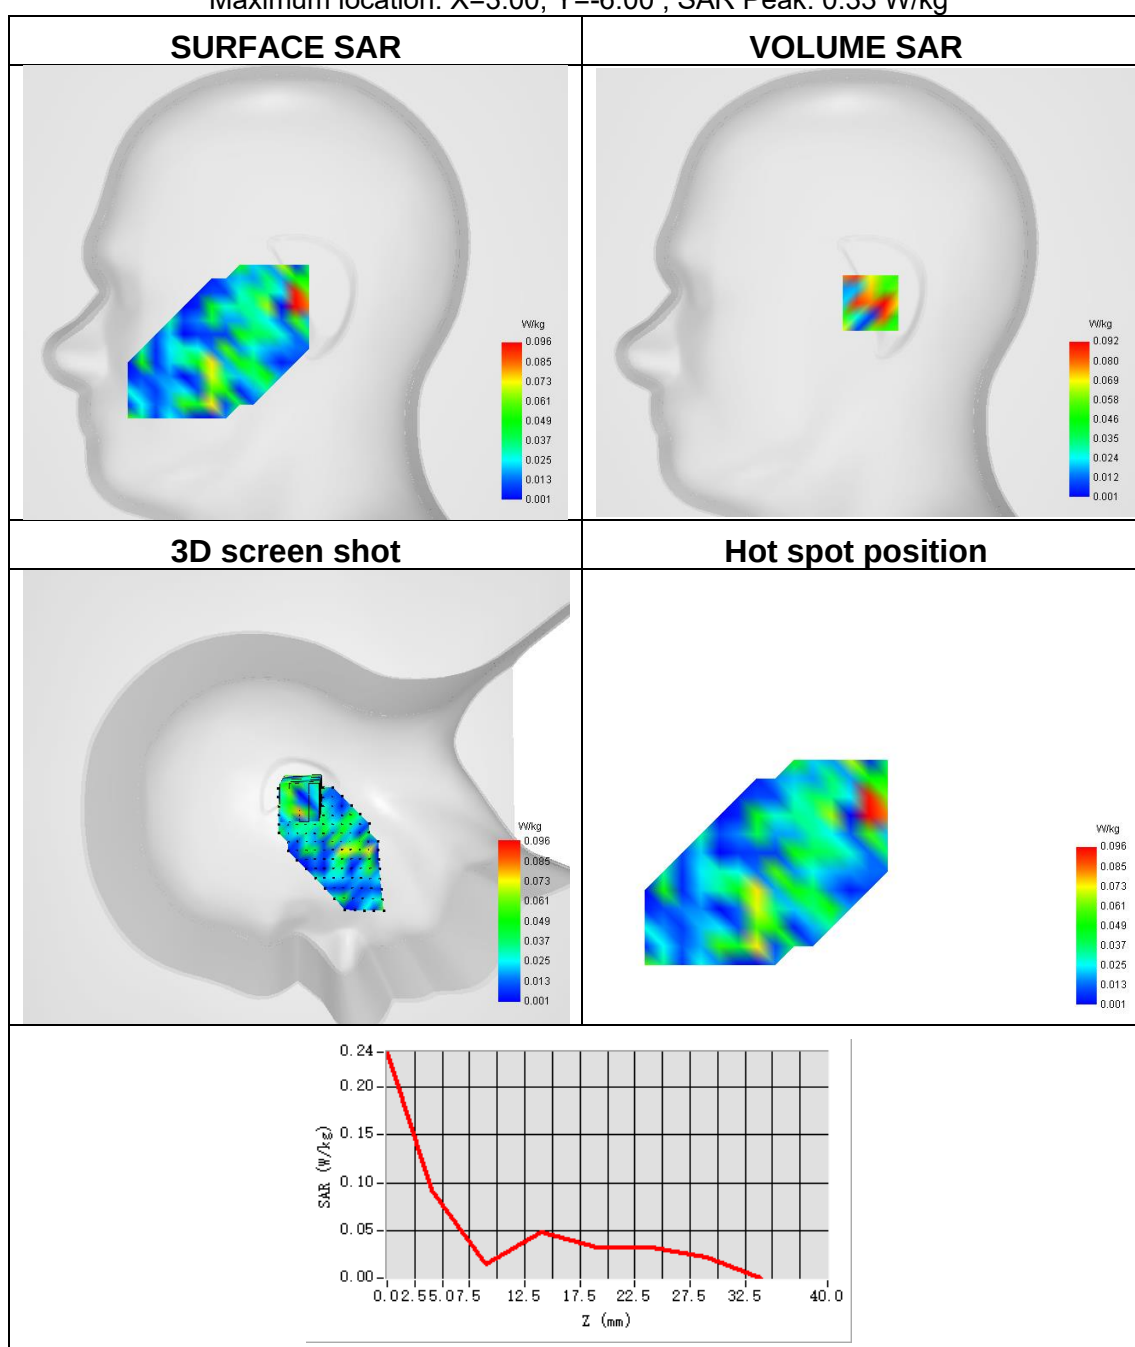




Plot 22:

Test Date	2023-10-29
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	ISM MIMO ANT 2
Signal	IEEE 802.11 ax
Frequency	2412
SAR 10g (W/Kg)	0.027
SAR 1g (W/Kg)	0.060

Maximum location: X=-9.00, Y=-16.00 ; SAR Peak: 0.15 W/kg

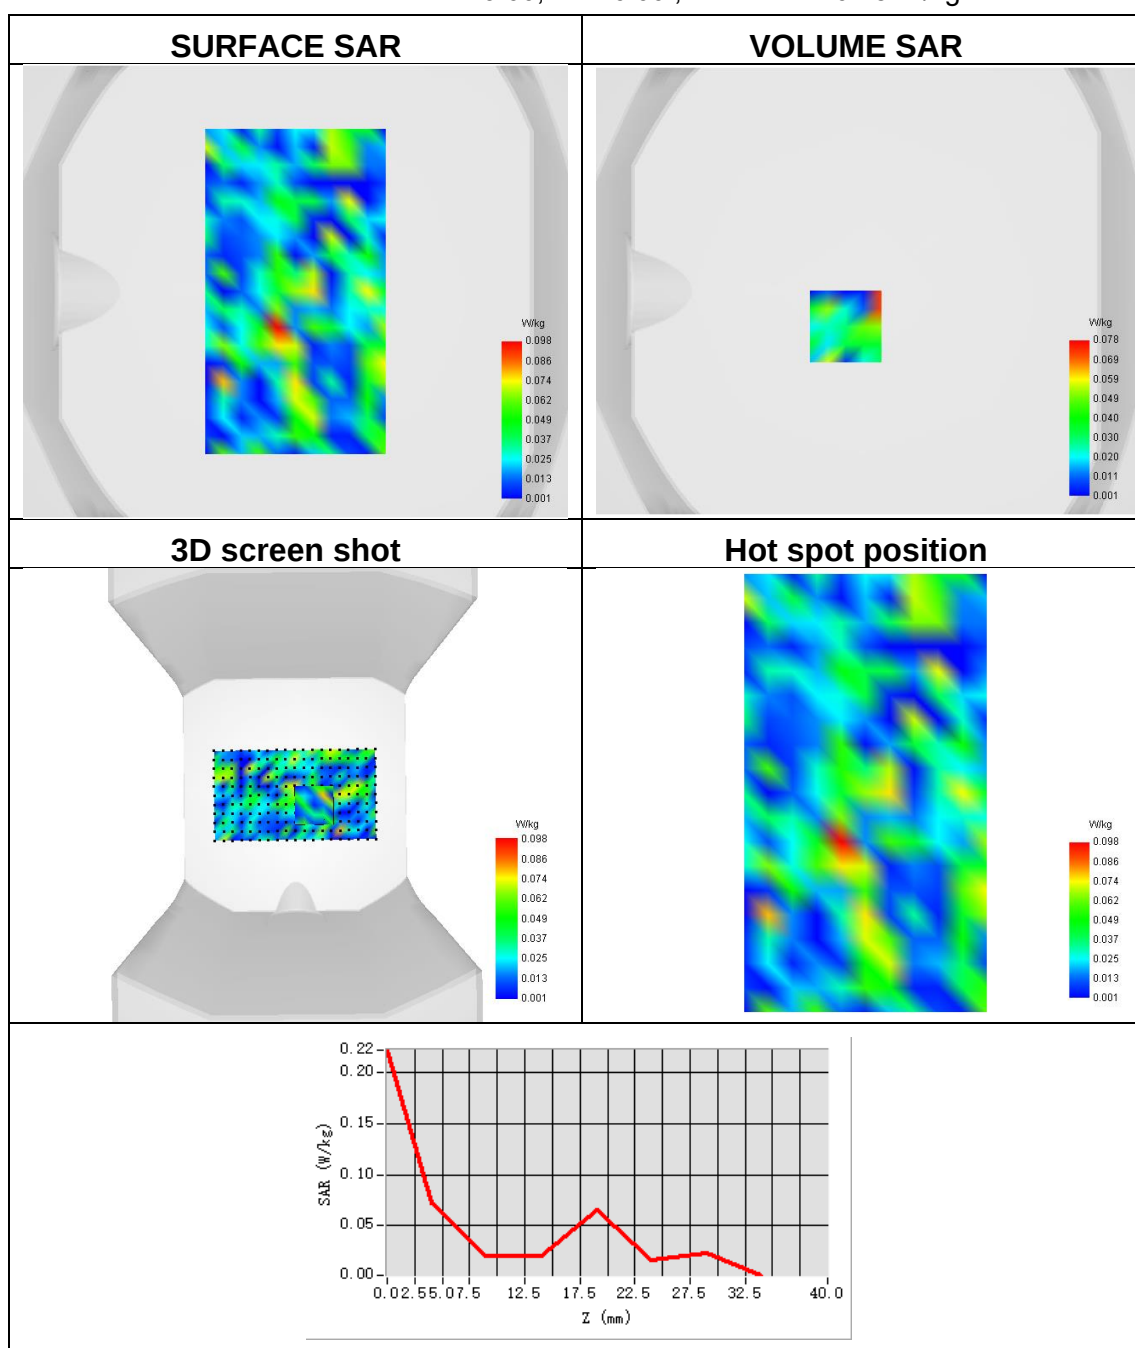




Plot 23:

Test Date	2023-10-25
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1 ANT 1
Signal	IEEE 802.11 a
Frequency	5240
SAR 10g (W/Kg)	0.170
SAR 1g (W/Kg)	0.307

Maximum location: X=-64.00, Y=-64.00 ; SAR Peak: 1.99 W/kg

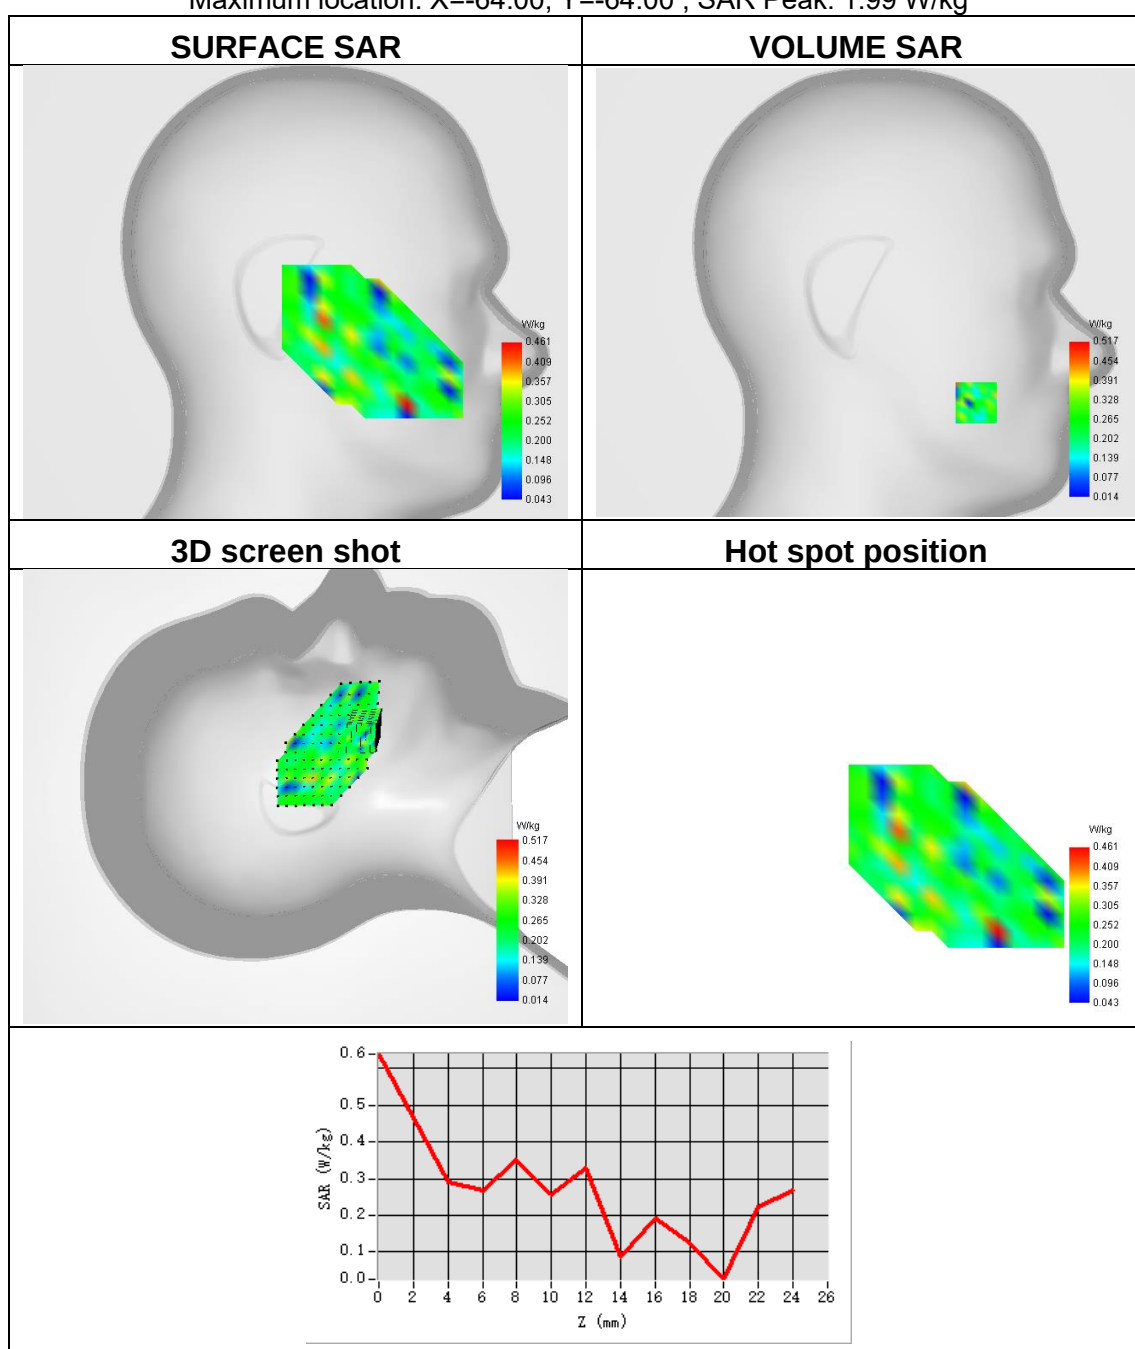




Plot 24:

Test Date	2023-10-25
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-1 ANT 1
Signal	IEEE 802.11 a
Frequency	5240
SAR 10g (W/Kg)	0.188
SAR 1g (W/Kg)	0.320

Maximum location: X=32.00, Y=-32.00 ; SAR Peak: 1.54 W/kg

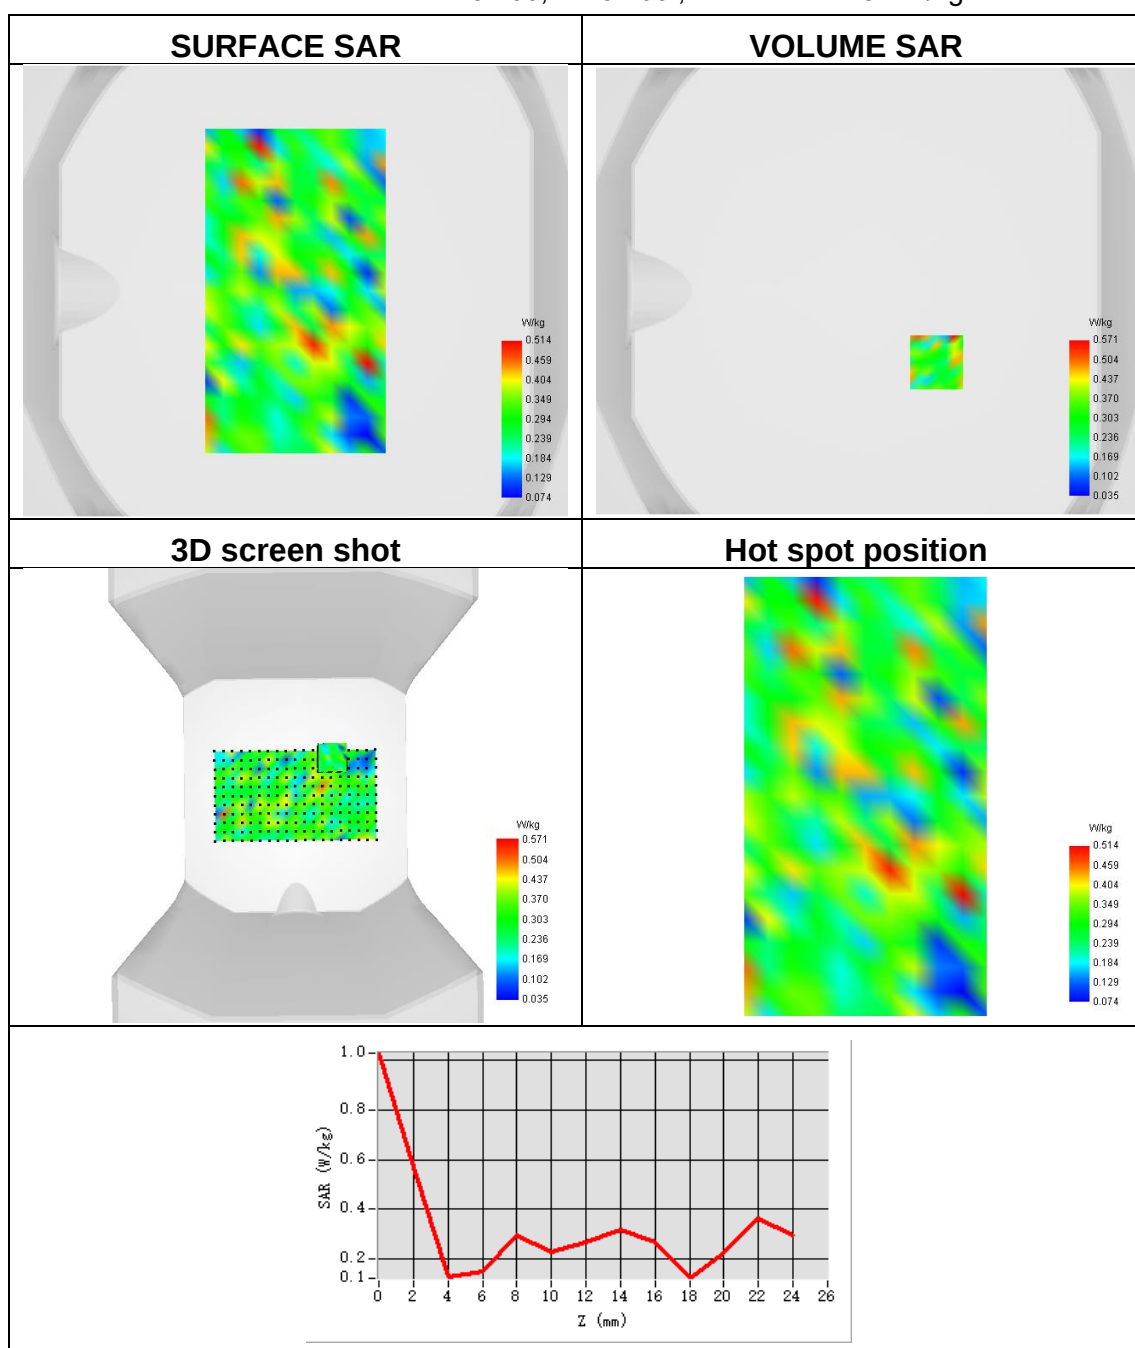




Plot 25:

Test Date	2023-10-25
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Tilt
Band	U-NII-1 ANT 2
Signal	IEEE 802.11 a
Frequency	5180
SAR 10g (W/Kg)	0.181
SAR 1g (W/Kg)	0.280

Maximum location: X=-32.00, Y=-32.00 ; SAR Peak: 2.07 W/kg

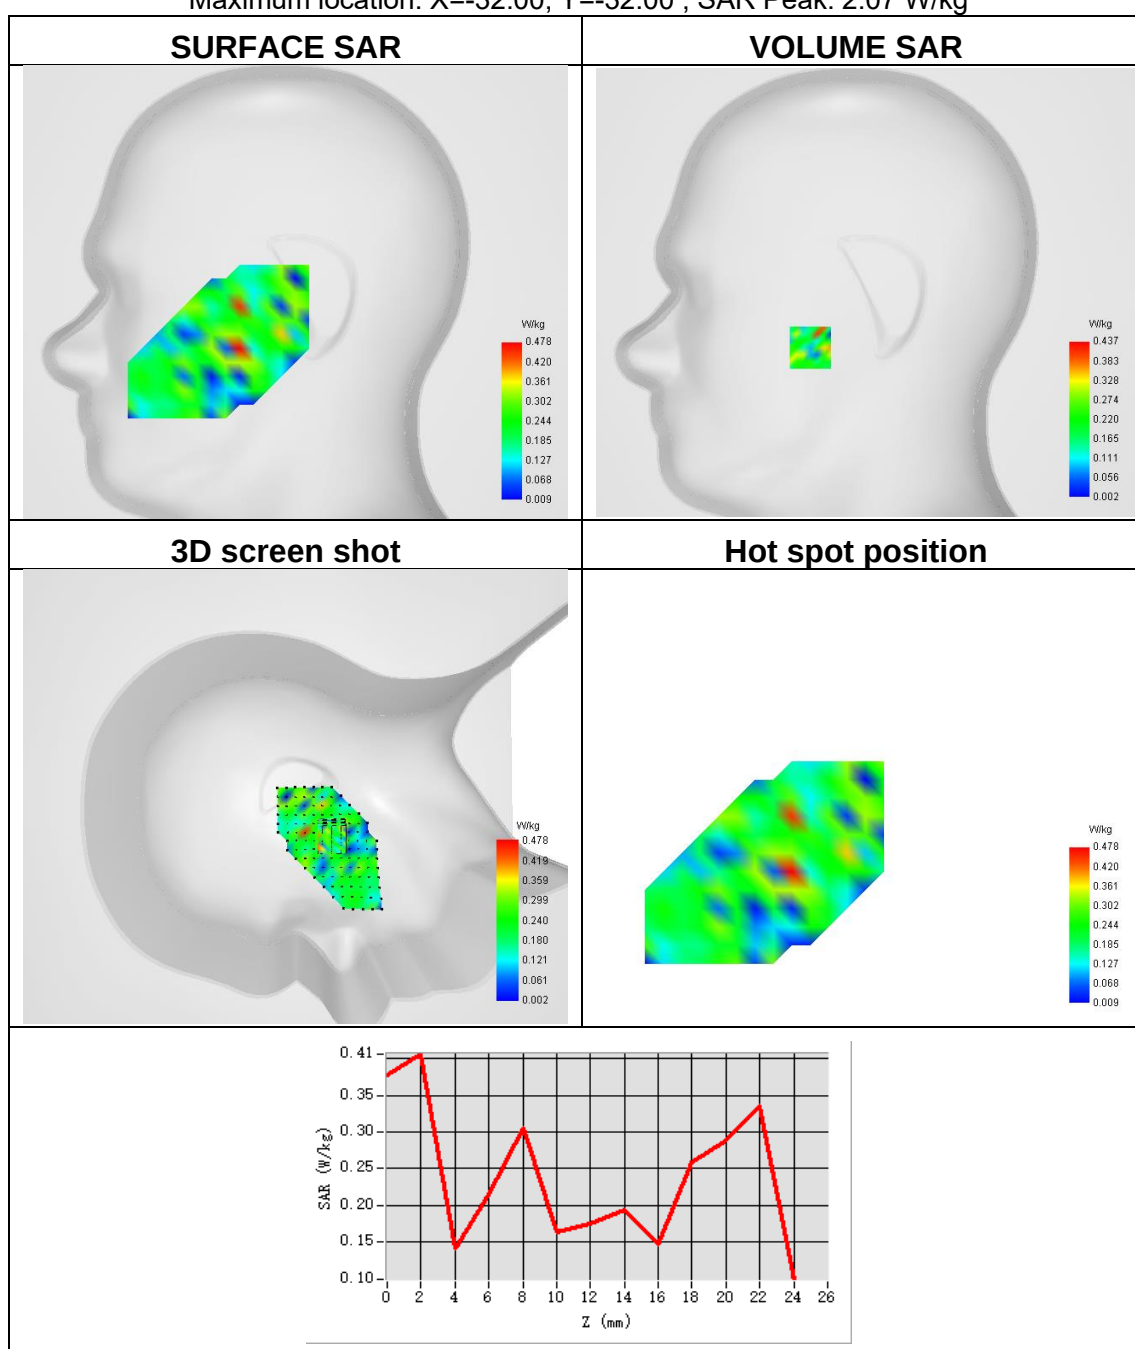




Plot 26:

Test Date	2023-10-25
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 ANT 2
Signal	IEEE 802.11 a
Frequency	5180
SAR 10g (W/Kg)	0.181
SAR 1g (W/Kg)	0.286

Maximum location: X=15.00, Y=64.00 ; SAR Peak: 1.34 W/kg

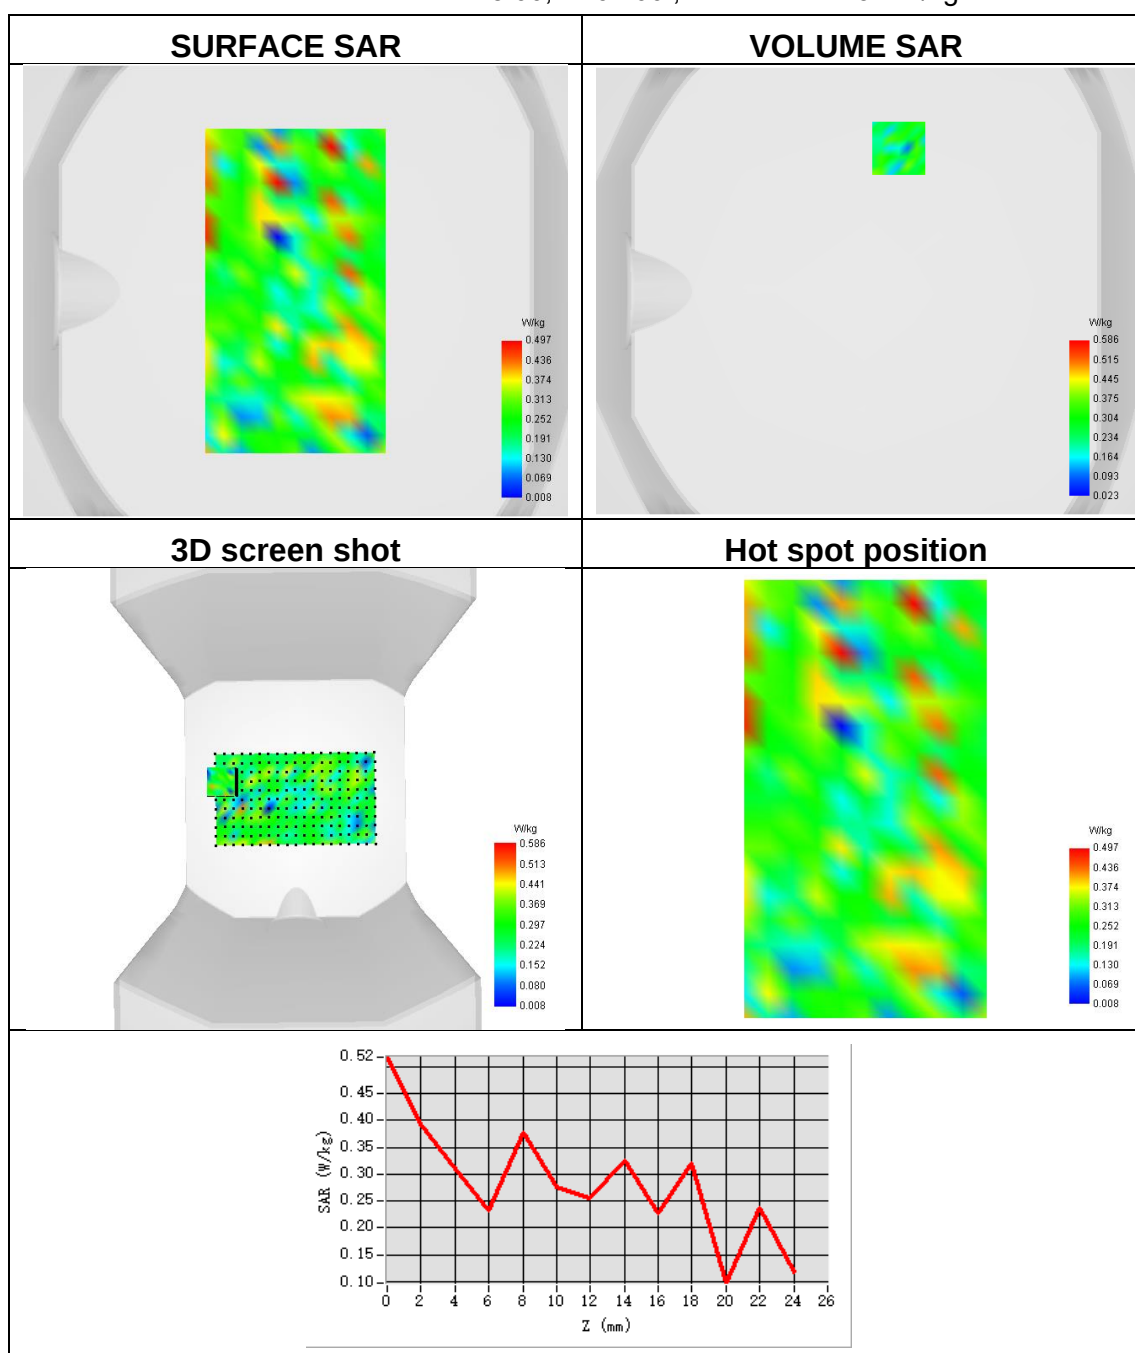




Plot 27:

Test Date	2023-10-30
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1 MIMO ANT 1
Signal	IEEE 802.11 n
Frequency	5180
SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.234

Maximum location: X=-34.00, Y=-9.00 ; SAR Peak: 1.42 W/kg

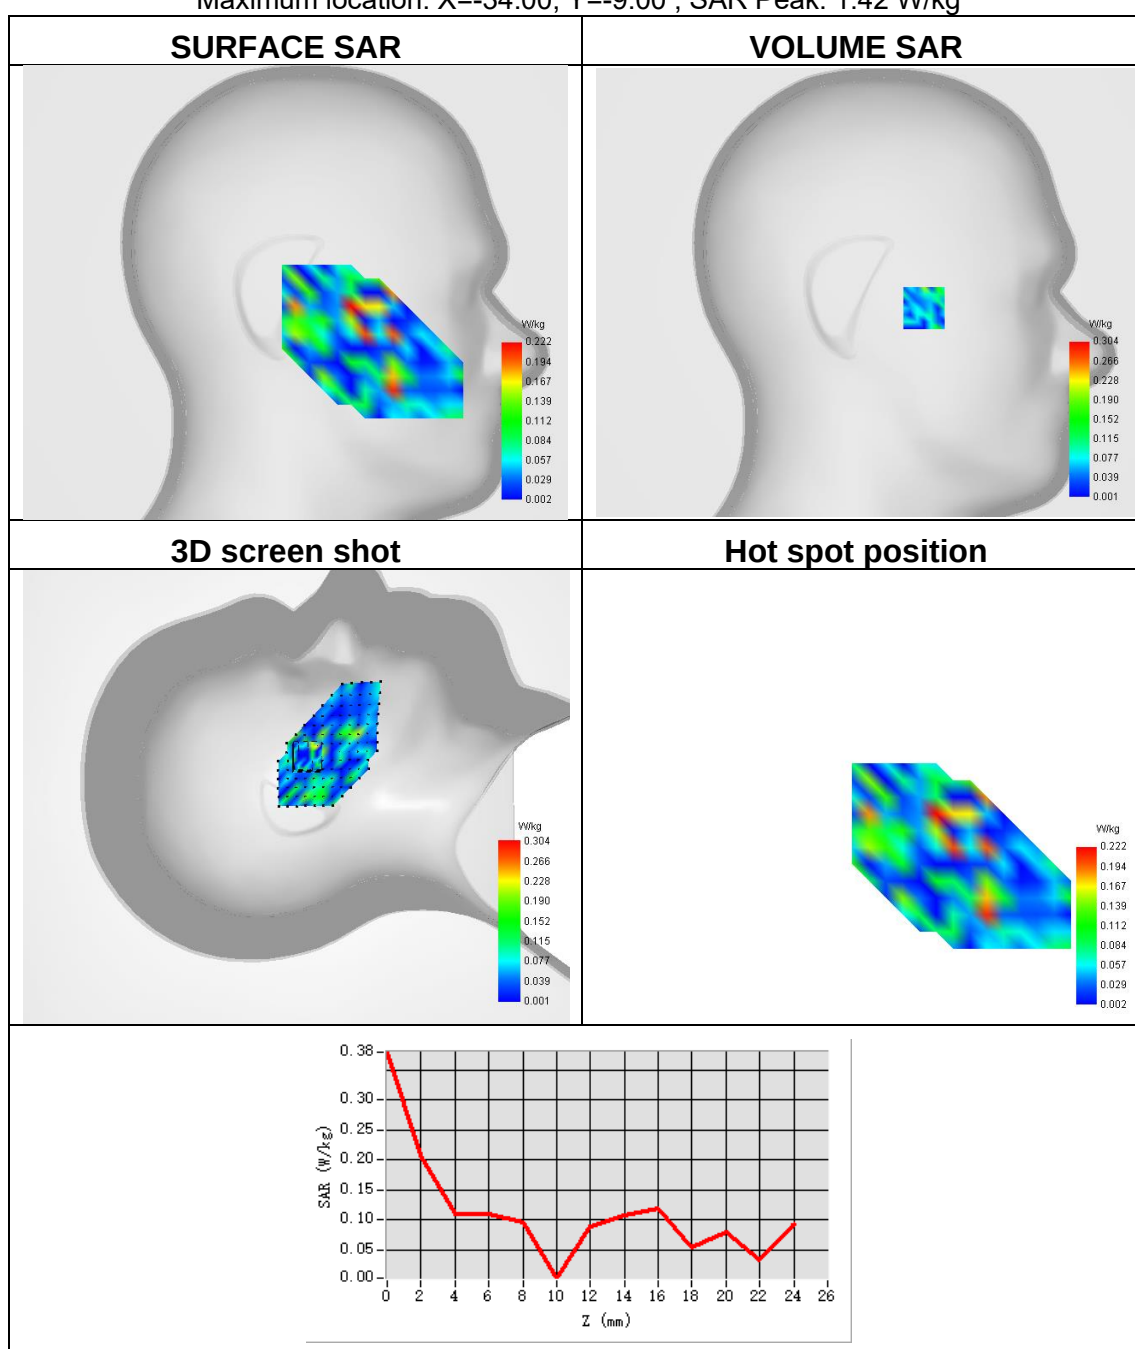




Plot 28:

Test Date	2023-10-30
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO ANT 1
Signal	IEEE 802.11 n
Frequency	5180
SAR 10g (W/Kg)	0.054
SAR 1g (W/Kg)	0.088

Maximum location: X=24.00, Y=-16.00 ; SAR Peak: 1.02 W/kg

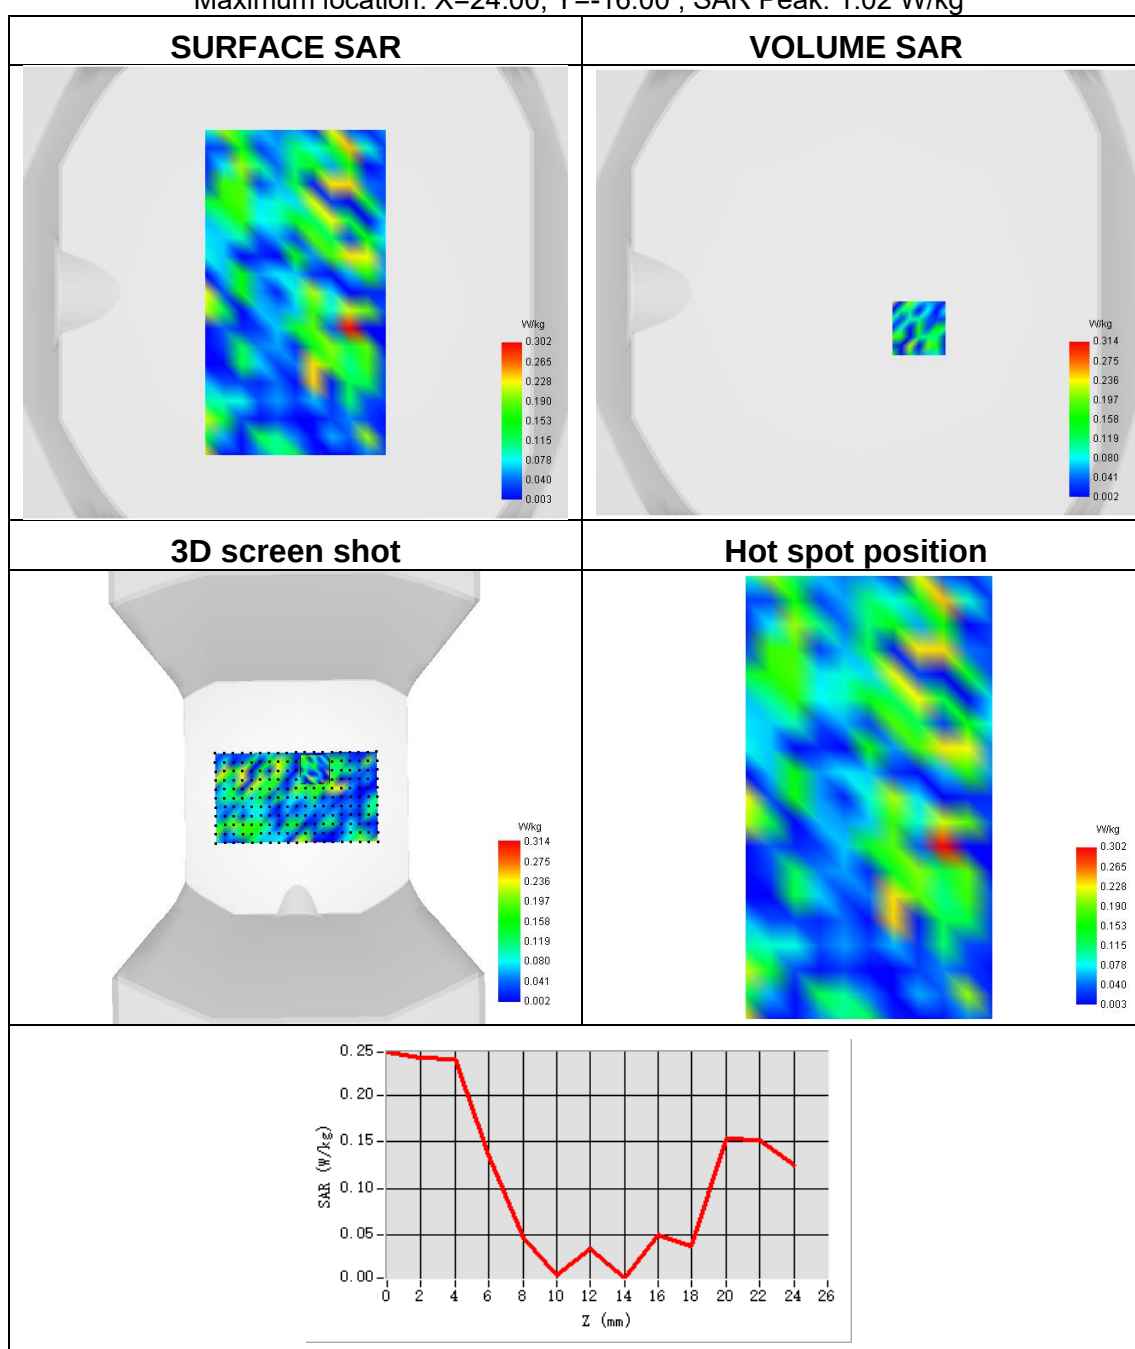




Plot 29:

Test Date	2023-10-30
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-1 MIMO ANT 2
Signal	IEEE 802.11 n
Frequency	5180
SAR 10g (W/Kg)	0.082
SAR 1g (W/Kg)	0.200

Maximum location: X=-8.00, Y=-33.00 ; SAR Peak: 1.64 W/kg

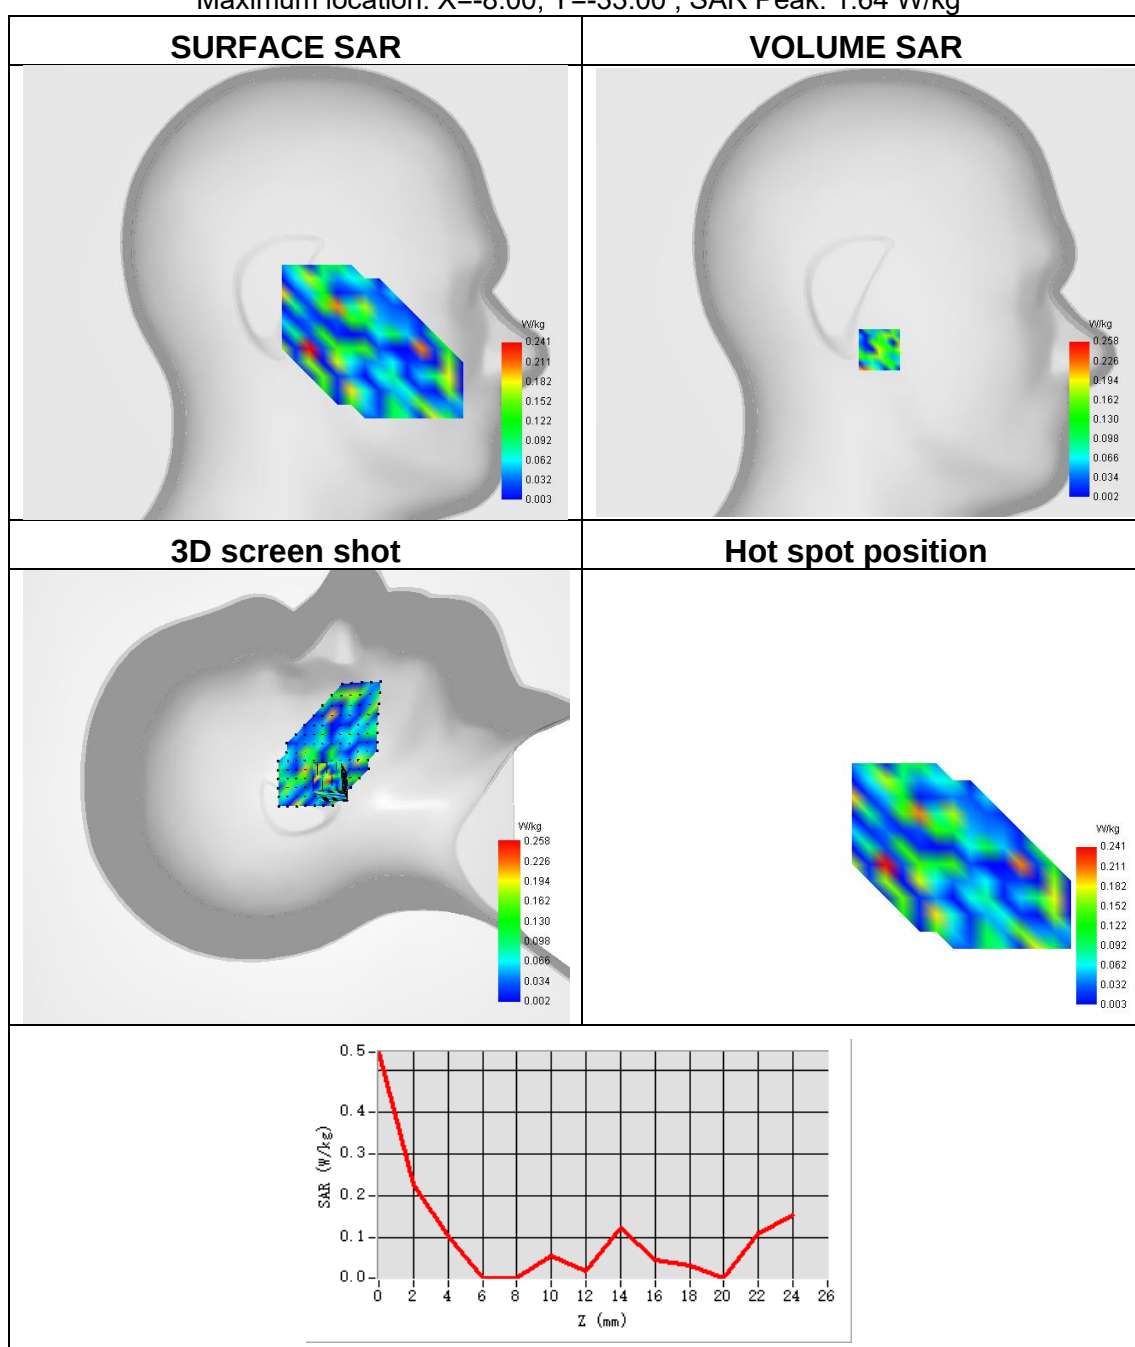




Plot 30:

Test Date	2023-10-30
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-1 MIMO ANT 2
Signal	IEEE 802.11 n
Frequency	5180
SAR 10g (W/Kg)	0.046
SAR 1g (W/Kg)	0.076

Maximum location: X=9.00, Y=16.00 ; SAR Peak: 0.80 W/kg

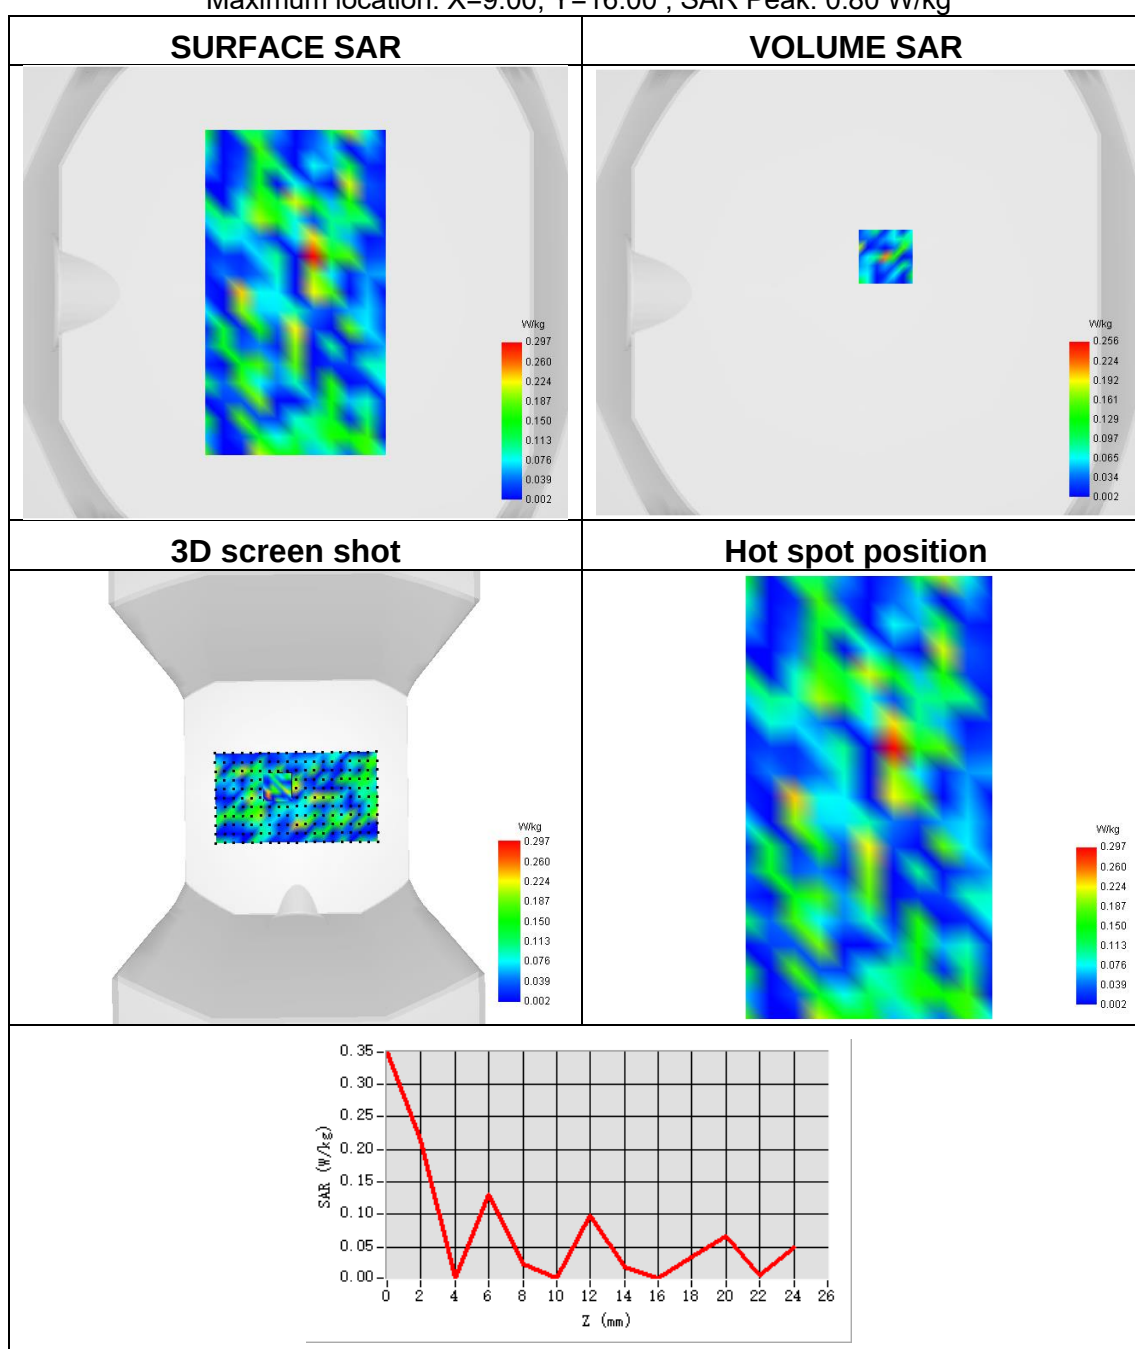




Plot 31:

Test Date	2023-10-26
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2 ANT 1
Signal	IEEE 802.11 n
Frequency	5270
SAR 10g (W/Kg)	0.181
SAR 1g (W/Kg)	0.269

Maximum location: X=-40.00, Y=-1.00 ; SAR Peak: 2.57 W/kg

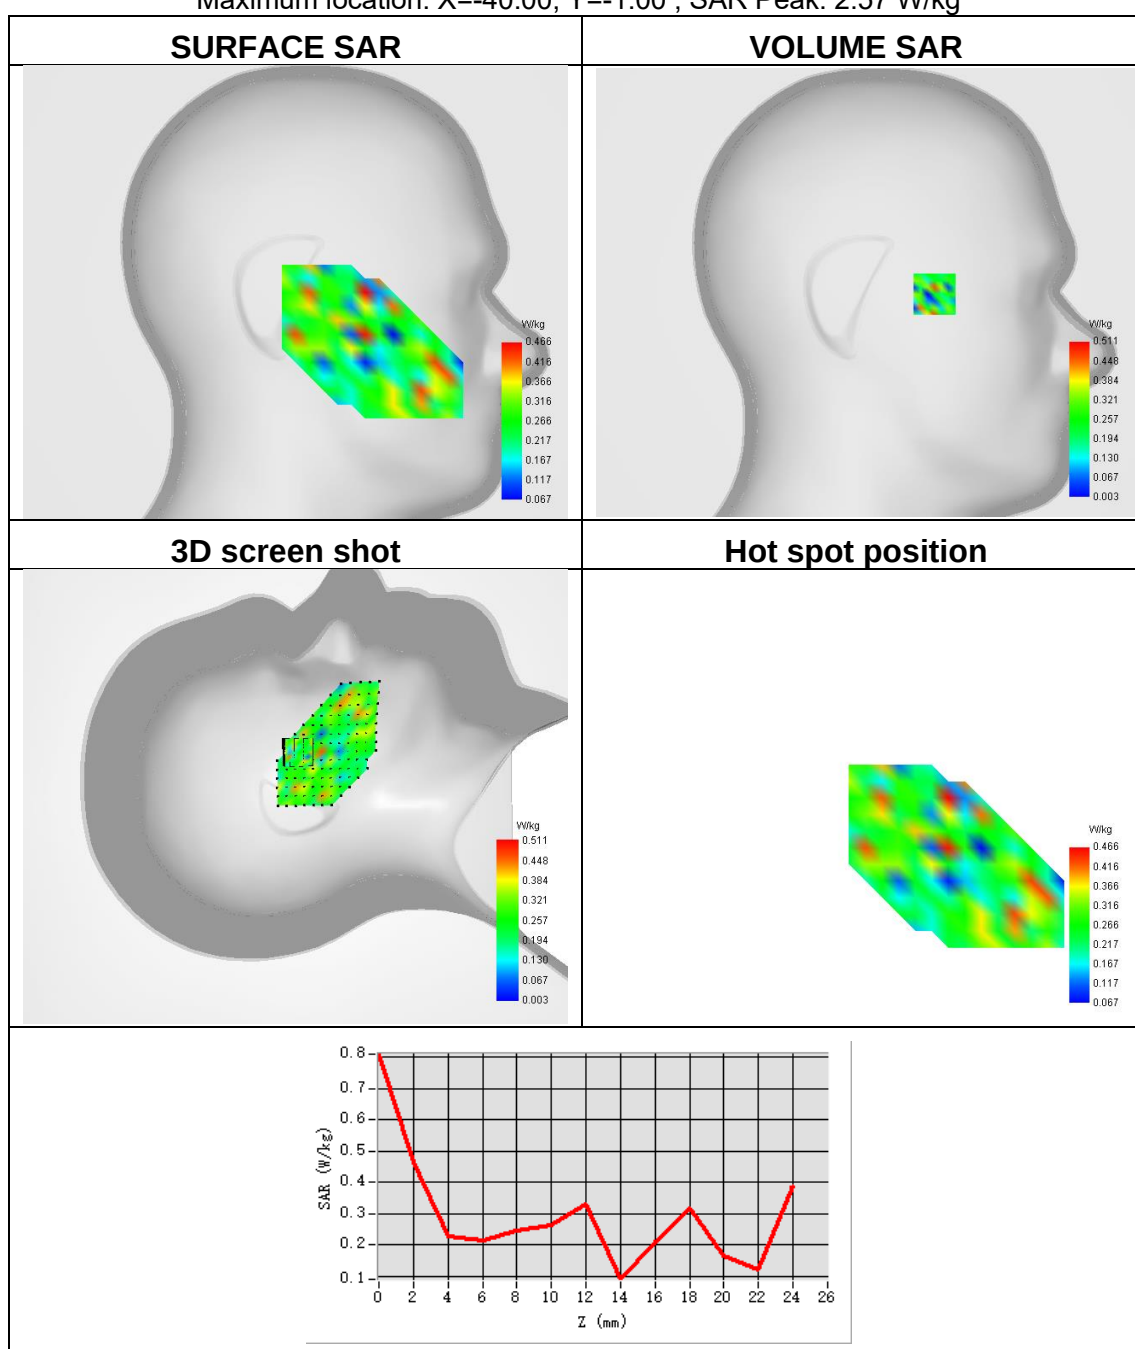




Plot 32:

Test Date	2023-10-26
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2 ANT 1
Signal	IEEE 802.11 n
Frequency	5270
SAR 10g (W/Kg)	0.199
SAR 1g (W/Kg)	0.347

Maximum location: X=-23.00, Y=48.00 ; SAR Peak: 1.71 W/kg

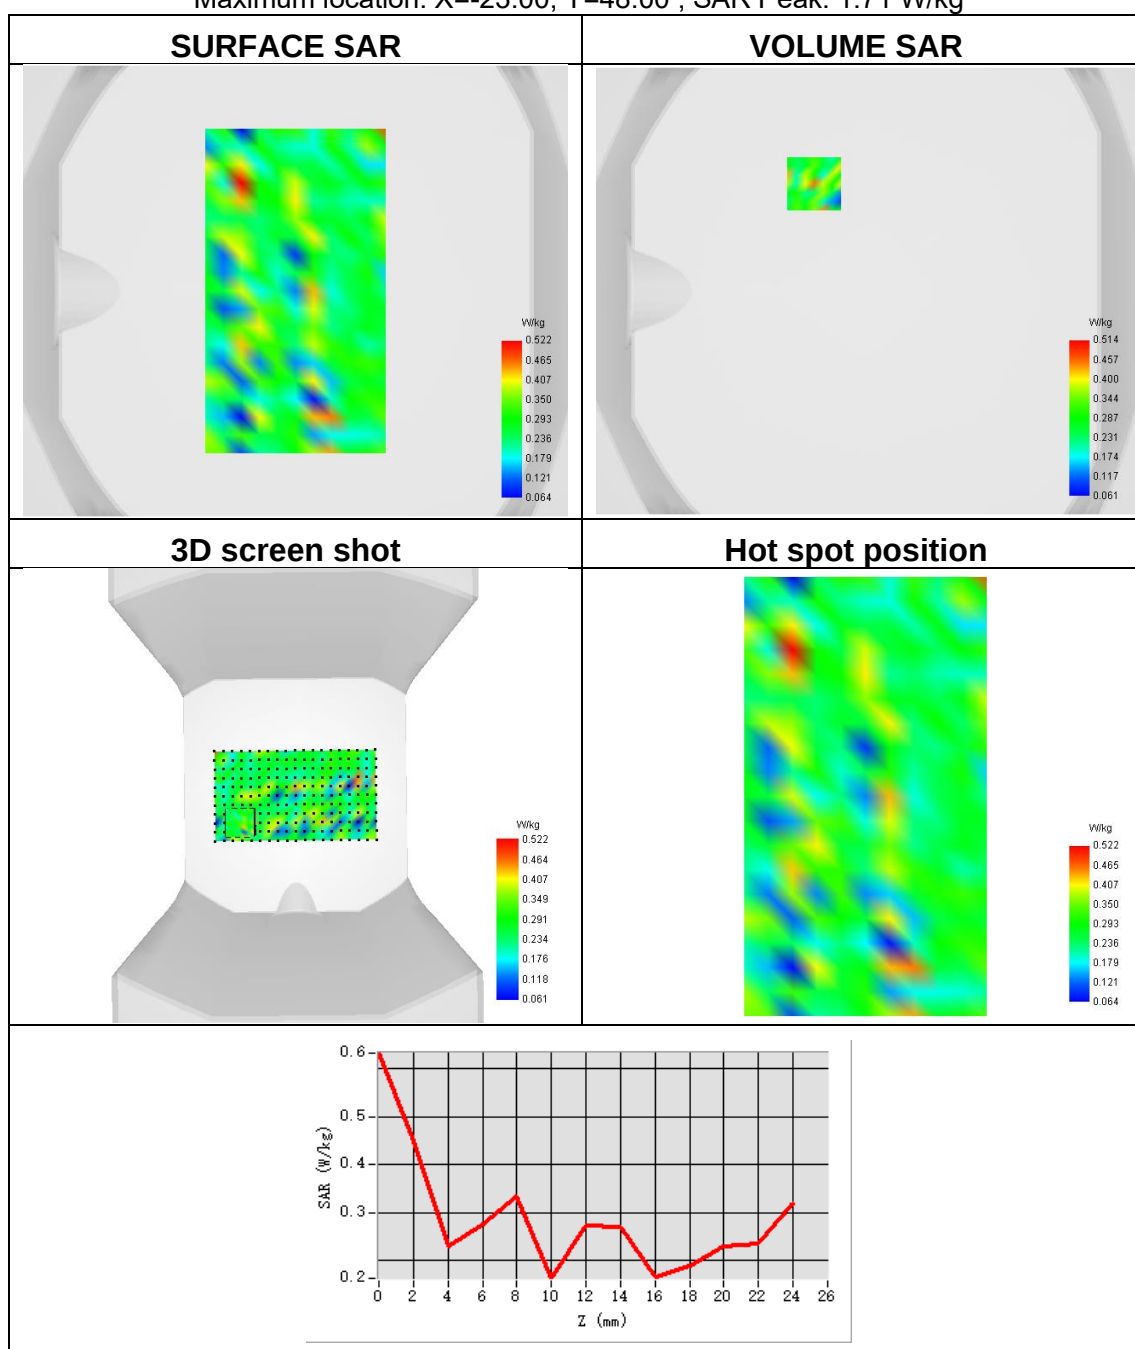




Plot 33:

Test Date	2023-10-26
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2 ANT 2
Signal	IEEE 802.11 n
Frequency	5310
SAR 10g (W/Kg)	0.156
SAR 1g (W/Kg)	0.196

Maximum location: X=-56.00, Y=-47.00 ; SAR Peak: 2.13 W/kg

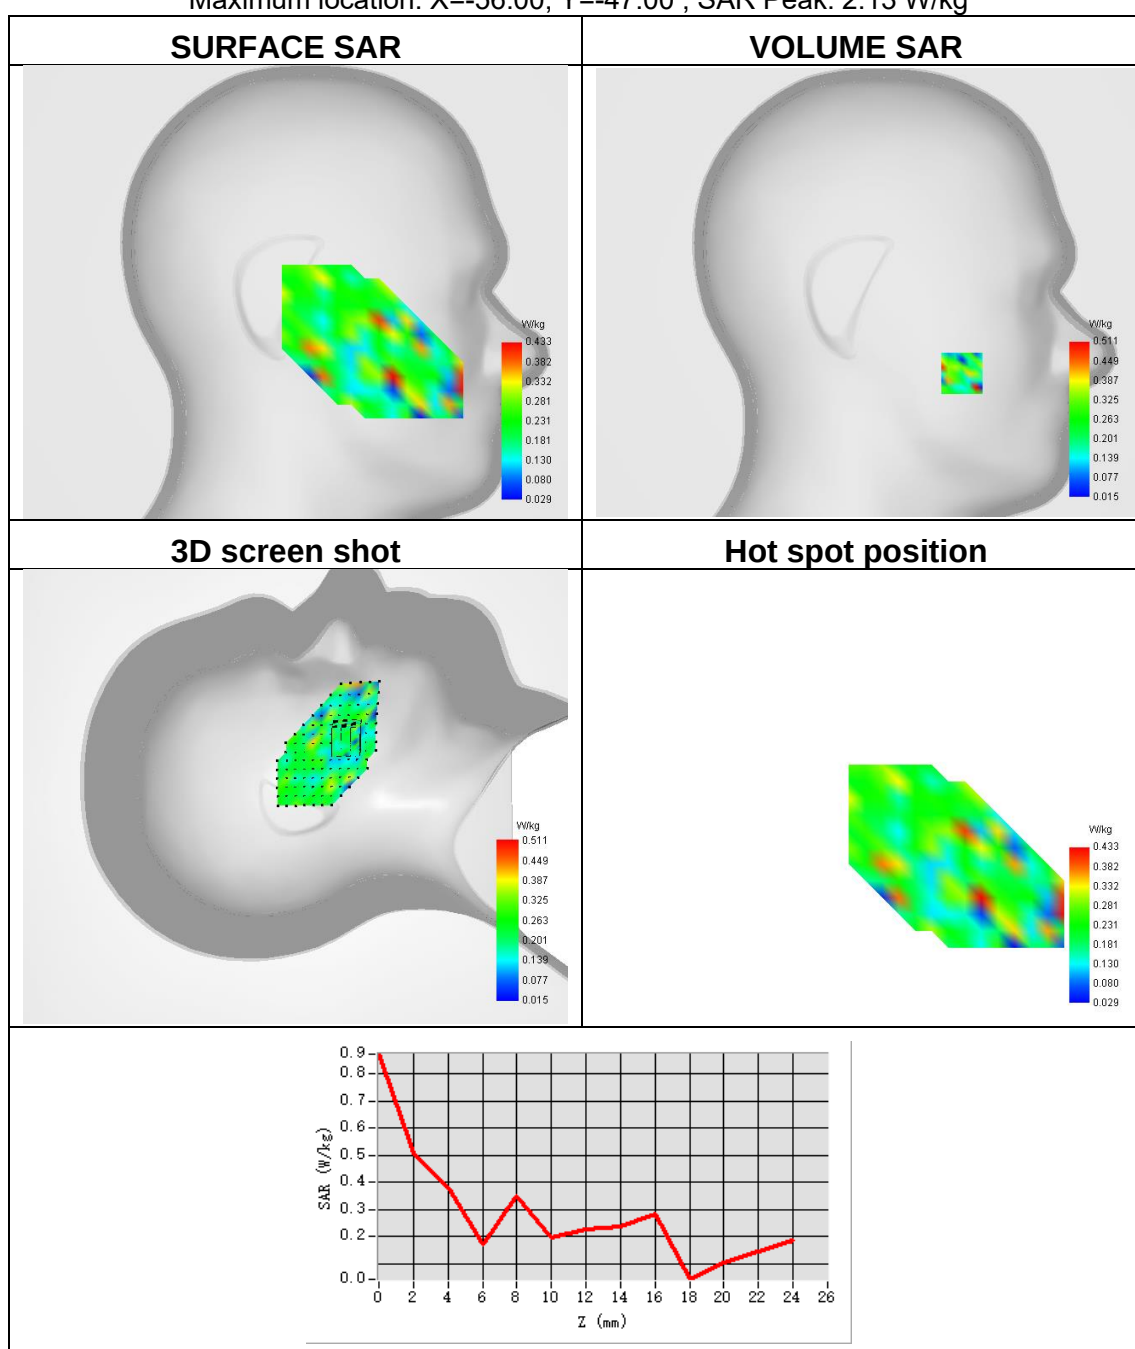




Plot 34:

Test Date	2023-10-26
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2 ANT 2
Signal	IEEE 802.11 n
Frequency	5310
SAR 10g (W/Kg)	0.196
SAR 1g (W/Kg)	0.325

Maximum location: X=0.00, Y=24.00 ; SAR Peak: 1.75 W/kg

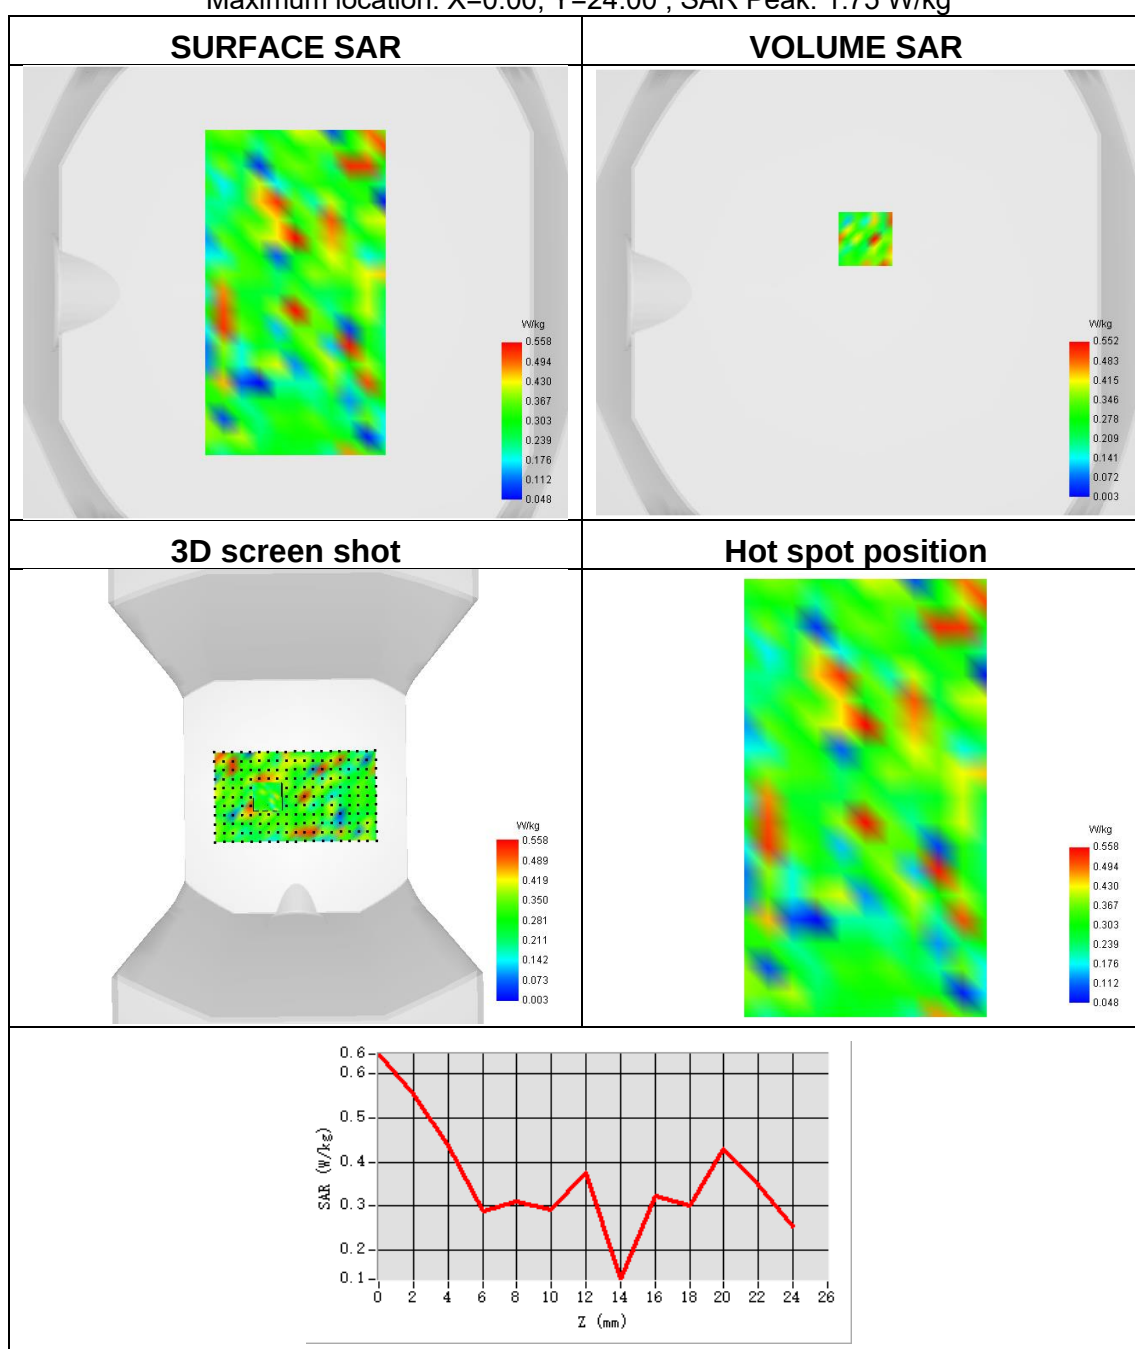




Plot 35:

Test Date	2023-10-31
Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Tilt
Band	U-NII-2 MIMO ANT 1
Signal	IEEE 802.11 n
Frequency	5270
SAR 10g (W/Kg)	0.067
SAR 1g (W/Kg)	0.261

Maximum location: X=-64.00, Y=-24.00 ; SAR Peak: 2.06 W/kg

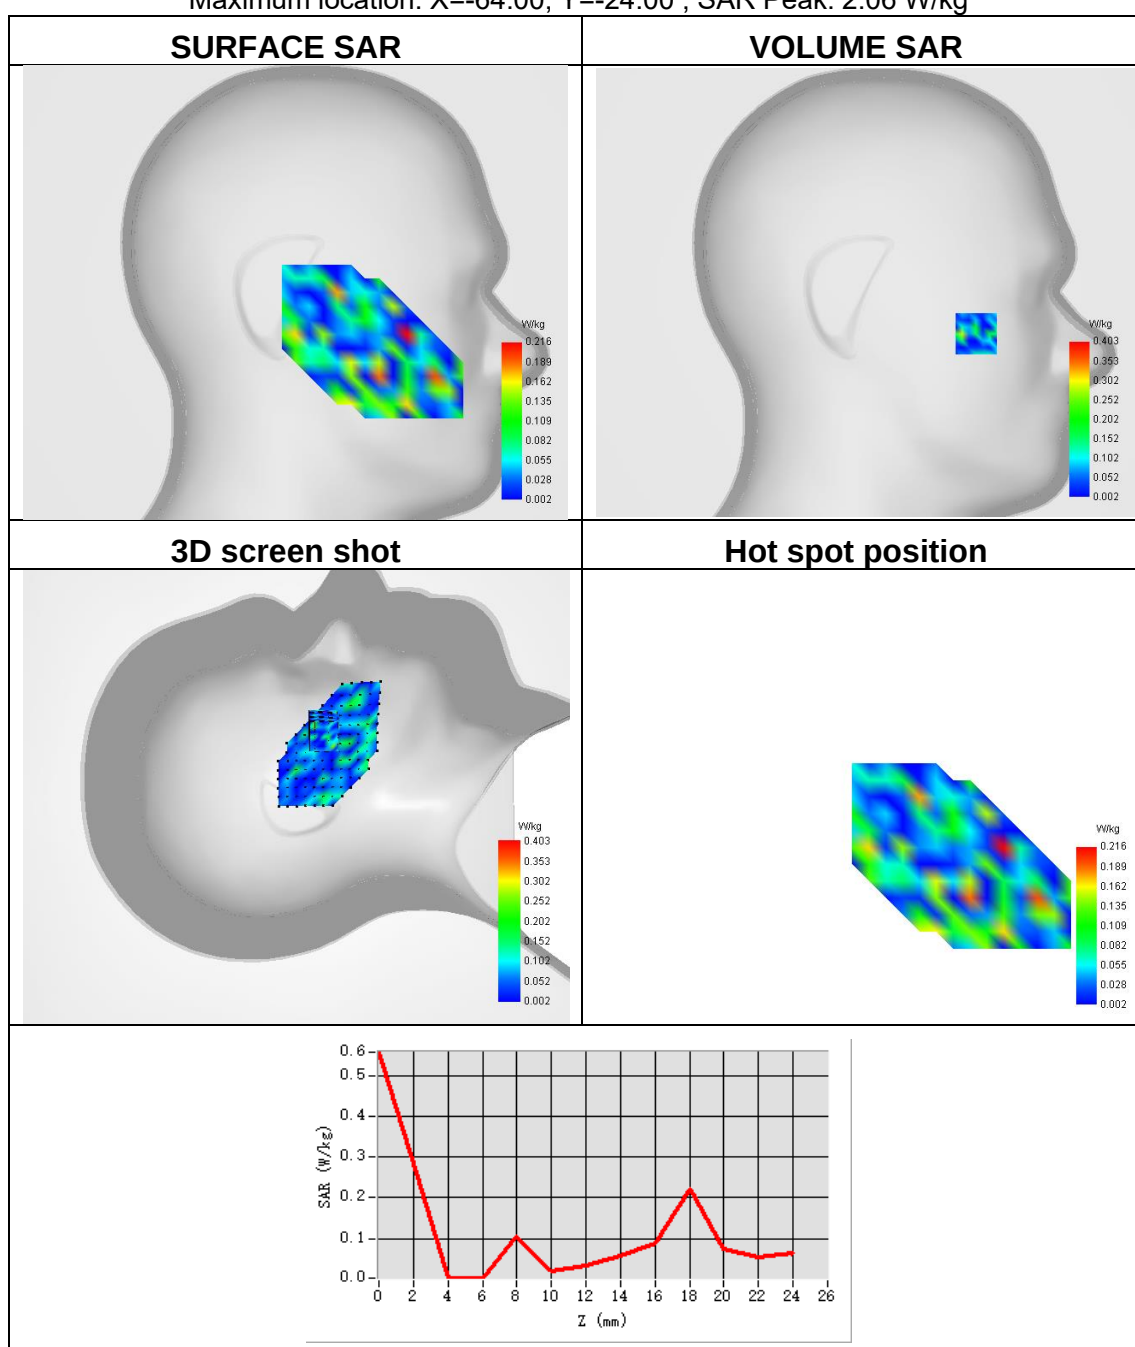



Plot 36:

Test Date	2023-10-31
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Top Side
Band	U-NII-2 MIMO ANT 1
Signal	IEEE 802.11 n
Frequency	5270
SAR 10g (W/Kg)	0.065
SAR 1g (W/Kg)	0.099

Maximum location: X=-16.00, Y=-62.00 ; SAR Peak: 0.65 W/kg

