



Appendix A: Conducted emission AC power port

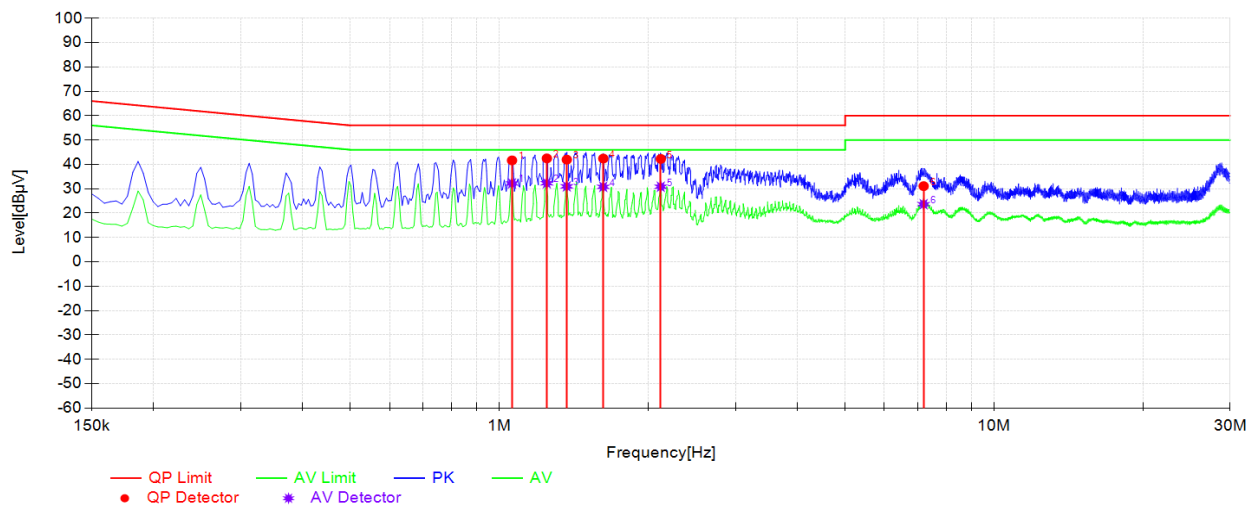

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Polarity	Verdict
1	1.0602	10.28	41.66	56.00	14.34	32.20	46.00	13.80	L1	PASS
2	1.2469	10.28	42.47	56.00	13.53	32.27	46.00	13.73	L1	PASS
3	1.3683	10.28	41.97	56.00	14.03	30.99	46.00	15.01	L1	PASS
4	1.6216	10.29	42.41	56.00	13.59	30.80	46.00	15.20	L1	PASS
5	2.1195	10.29	42.25	56.00	13.75	30.84	46.00	15.16	L1	PASS
6	7.2043	10.43	31.09	60.00	28.91	23.67	50.00	26.33	L1	PASS

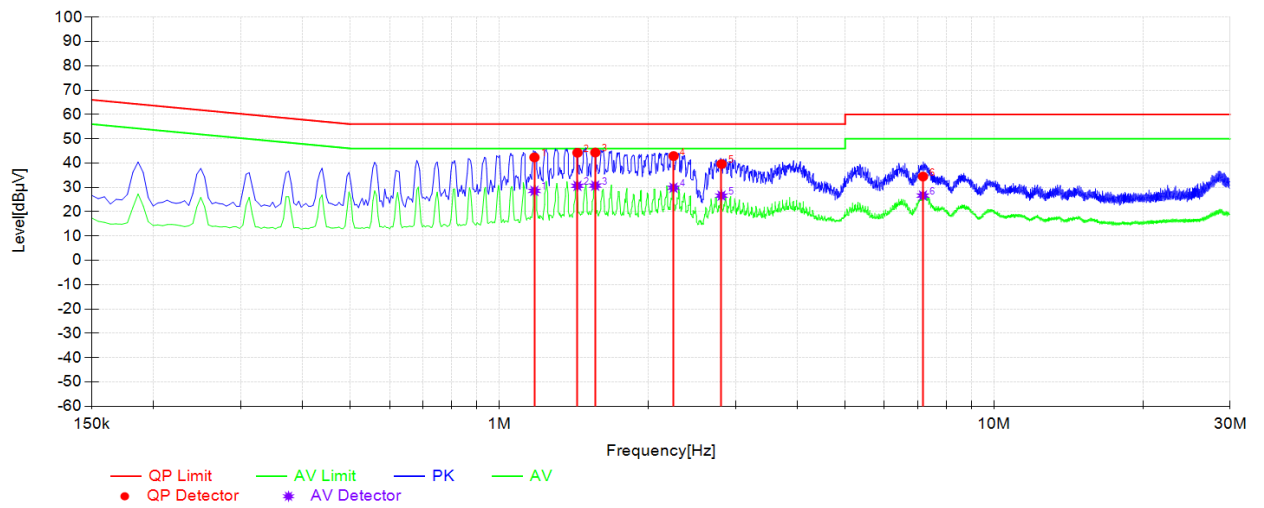

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Polarity	Verdict
1	1.1769	10.28	42.35	56.00	13.65	28.58	46.00	17.42	N	PASS
2	1.4381	10.28	44.25	56.00	11.75	30.64	46.00	15.36	N	PASS
3	1.5624	10.29	44.36	56.00	11.64	30.72	46.00	15.28	N	PASS
4	2.2491	10.30	42.89	56.00	13.11	29.84	46.00	16.16	N	PASS
5	2.8119	10.34	39.61	56.00	16.39	26.60	46.00	19.40	N	PASS
6	7.1830	10.43	34.48	60.00	25.52	26.63	50.00	23.37	N	PASS

Appendix B: Restricted Band

Mode:	BLE-2402
-------	----------

NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2310	46.54	7.07	74.00	27.46	150	286	Horizontal
2	2335.28	48.63	7.23	74.00	25.37	150	244	Horizontal
3	2356.08	48.04	7.28	74.00	25.96	150	136	Horizontal
4	2360.8	49.11	7.33	74.00	24.89	150	352	Horizontal
5	2378.32	48.73	7.86	74.00	25.27	150	142	Horizontal
6	2390	47.94	8.38	74.00	26.06	150	176	Horizontal


NO.	Freq. [MHz]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2310	46.72	7.07	74.00	27.28	150	120	Vertical
2	2334.48	47.99	7.21	74.00	26.01	150	159	Vertical
3	2354.16	48.21	7.27	74.00	25.79	150	84	Vertical
4	2361.2	49.20	7.34	74.00	24.80	150	284	Vertical
5	2383.92	49.27	8.12	74.00	24.73	150	178	Vertical
6	2390	48.43	8.38	74.00	25.57	150	36	Vertical

Mode:	BLE-2480
-------	----------


NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2483.5	48.64	8.62	74.00	25.36	150	113	Horizontal
2	2487.22	50.11	8.31	74.00	23.89	150	0	Horizontal
3	2488.35	49.44	8.22	74.00	24.56	150	94	Horizontal
4	2491.32	50.31	8.37	74.00	23.69	150	355	Horizontal
5	2497.69	49.44	8.22	74.00	24.56	150	45	Horizontal
6	2500	47.45	8.10	74.00	26.55	150	0	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2483.5	48.73	8.62	74.00	25.27	150	106	Vertical
2	2484.78	49.86	8.51	74.00	24.14	150	344	Vertical
3	2488.86	49.27	8.24	74.00	24.73	150	142	Vertical
4	2492.54	49.19	8.42	74.00	24.81	150	109	Vertical
5	2494.32	50.20	8.48	74.00	23.80	150	199	Vertical
6	2500	47.62	8.10	74.00	26.38	150	230	Vertical

Appendix C: Spurious emissions

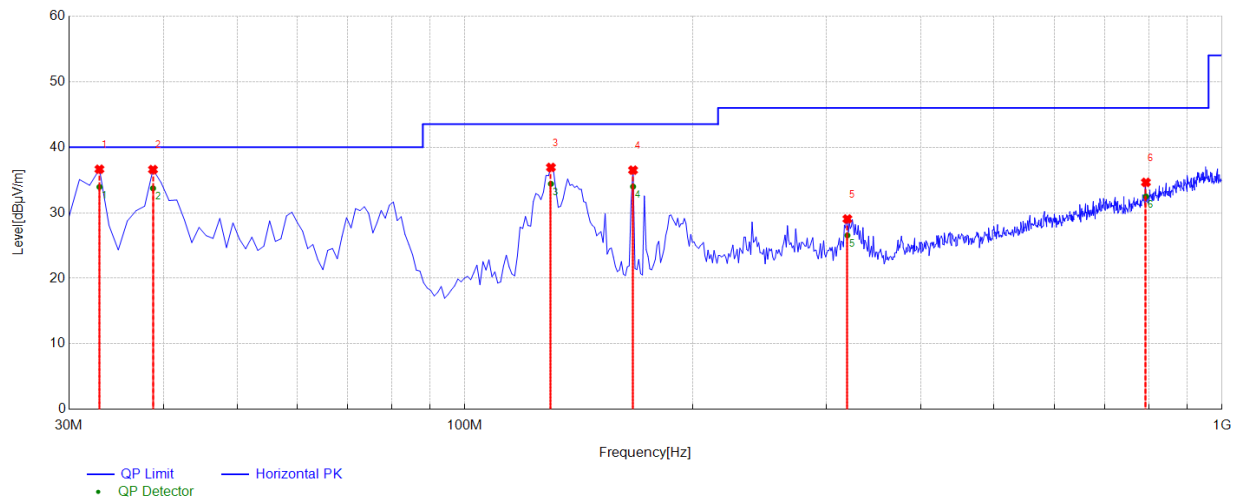

Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	32.91	-10.38	33.94	40.00	6.06	100	348	Horizontal	PASS
2	38.73	-9.26	33.73	40.00	6.27	100	348	Horizontal	PASS
3	129.91	-10.40	34.41	43.50	9.09	100	267	Horizontal	PASS
4	166.77	-10.29	33.99	43.50	9.51	100	284	Horizontal	PASS
5	320.03	-8.74	26.55	46.00	19.45	100	256	Horizontal	PASS
6	793.39	1.11	32.49	46.00	13.51	100	216	Horizontal	PASS

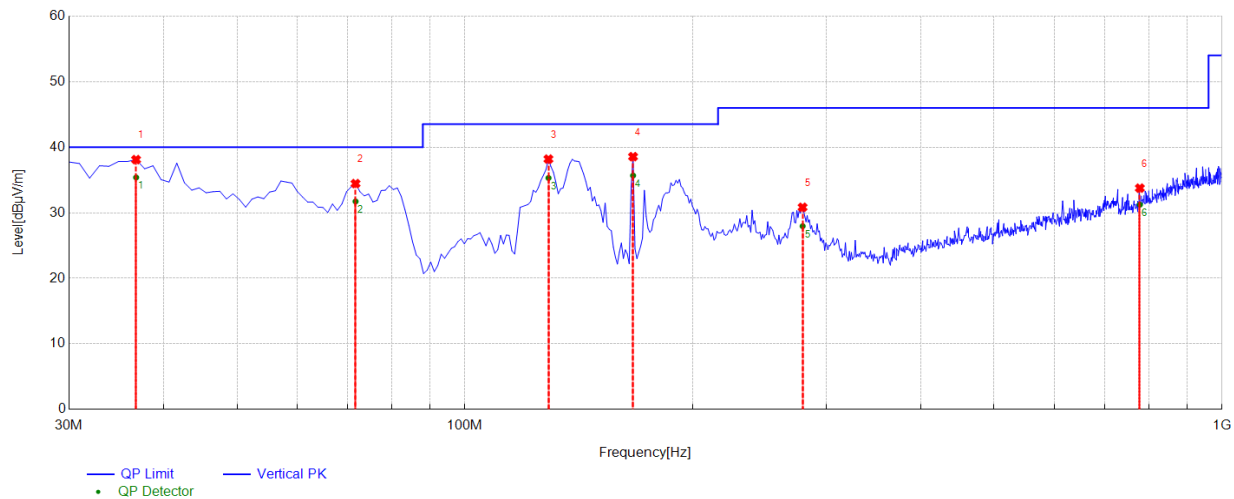

Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	36.79	-9.63	35.39	40.00	4.61	100	267	Vertical	PASS
2	71.71	-12.20	31.73	40.00	8.27	100	267	Vertical	PASS
3	128.94	-10.44	35.31	43.50	8.19	100	256	Vertical	PASS
4	166.77	-10.29	35.68	43.50	7.82	100	248	Vertical	PASS
5	279.29	-9.13	27.96	46.00	18.04	100	264	Vertical	PASS
6	778.84	0.76	31.23	46.00	14.77	100	358	Vertical	PASS

Mode:	BLE-2402
-------	----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1440	1.33	41.32	74.00	32.68	32.77	54.00	21.23	150	211	Horizontal	PASS
2	1988	5.98	42.50	74.00	31.50	37.17	54.00	16.83	150	12	Horizontal	PASS
3	5037	-14.23	40.86	74.00	33.14	32.83	54.00	21.17	150	274	Horizontal	PASS
4	6801	-11.70	42.74	74.00	31.26	33.95	54.00	20.05	150	46	Horizontal	PASS
5	8346	-10.08	42.85	74.00	31.15	33.88	54.00	20.12	150	36	Horizontal	PASS
6	12462	-3.92	45.42	74.00	28.58	36.82	54.00	17.18	150	233	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1440	1.33	40.50	74.00	33.50	32.88	54.00	21.12	150	55	Vertical	PASS
2	2006	6.16	42.18	74.00	31.82	36.72	54.00	17.28	150	22	Vertical	PASS
3	3951	-17.33	46.63	74.00	27.37	35.36	54.00	18.64	150	110	Vertical	PASS
4	5928	-12.26	43.93	74.00	30.07	33.21	54.00	20.79	150	222	Vertical	PASS
5	8976	-9.69	43.87	74.00	30.13	33.79	54.00	20.21	150	300	Vertical	PASS
6	11472	-5.71	45.29	74.00	28.71	37.06	54.00	16.94	150	4	Vertical	PASS

Mode:	BLE-2440
-------	----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1440	1.33	40.83	74.00	33.17	33.12	54.00	20.88	150	125	Horizontal	PASS
2	2002	6.14	42.88	74.00	31.12	37.02	54.00	16.98	150	174	Horizontal	PASS
3	5271	-14.03	42.86	74.00	31.14	32.03	54.00	21.97	150	235	Horizontal	PASS
4	7107	-11.55	41.94	74.00	32.06	33.72	54.00	20.28	150	220	Horizontal	PASS
5	10650	-7.19	45.24	74.00	28.76	35.01	54.00	18.99	150	220	Horizontal	PASS
6	12294	-5.11	45.40	74.00	28.60	36.73	54.00	17.27	150	55	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1440	1.33	40.73	74.00	33.27	33.87	54.00	20.13	150	51	Vertical	PASS
2	2046	6.33	43.67	74.00	30.33	37.91	54.00	16.09	150	228	Vertical	PASS
3	3951	-17.33	45.94	74.00	28.06	30.78	54.00	23.22	150	94	Vertical	PASS
4	7023	-11.81	41.55	74.00	32.45	33.55	54.00	20.45	150	78	Vertical	PASS
5	9963	-8.16	43.28	74.00	30.72	34.18	54.00	19.82	150	113	Vertical	PASS
6	13908	-2.23	45.81	74.00	28.19	37.19	54.00	16.81	150	256	Vertical	PASS

Mode:	BLE-2480
-------	----------

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1440	1.33	42.56	74.00	31.44	32.29	54.00	21.71	150	213	Horizontal	PASS
2	1988	5.98	44.40	74.00	29.60	36.71	54.00	17.29	150	241	Horizontal	PASS
3	5016	-14.55	40.77	74.00	33.23	32.71	54.00	21.29	150	103	Horizontal	PASS
4	7389	-11.58	42.59	74.00	31.41	33.36	54.00	20.64	150	77	Horizontal	PASS
5	11838	-4.92	45.53	74.00	28.47	36.72	54.00	17.28	150	240	Horizontal	PASS
6	15303	-0.75	48.10	74.00	25.90	38.12	54.00	15.88	150	282	Horizontal	PASS

Final Data List												
NO.	Freq. [MHz]	Factor [dB/m]	PK Value [dBμV/m]	PK Limit [dBμV/m]	PK Margin [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	1440	1.33	41.26	74.00	32.74	32.37	54.00	21.63	150	265	Vertical	PASS
2	2012	6.18	43.24	74.00	30.76	38.22	54.00	15.78	150	73	Vertical	PASS
3	3939	-17.18	46.99	74.00	27.01	30.81	54.00	23.19	150	96	Vertical	PASS
4	5919	-12.41	44.61	74.00	29.39	34.10	54.00	19.90	150	87	Vertical	PASS
5	8352	-10.02	43.09	74.00	30.91	34.50	54.00	19.50	150	335	Vertical	PASS
6	12309	-5.01	45.63	74.00	28.37	35.89	54.00	18.11	150	326	Vertical	PASS