


802.11ac VHT40 mode/5510MHz


Detector mode: Peak

Polarity: Horizontal

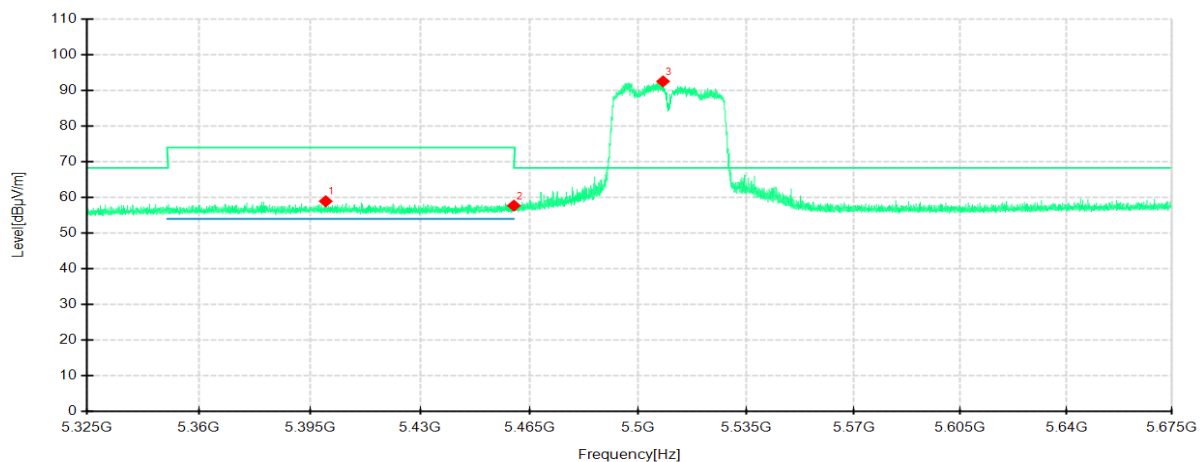

Detector mode: Peak

Polarity: Vertical

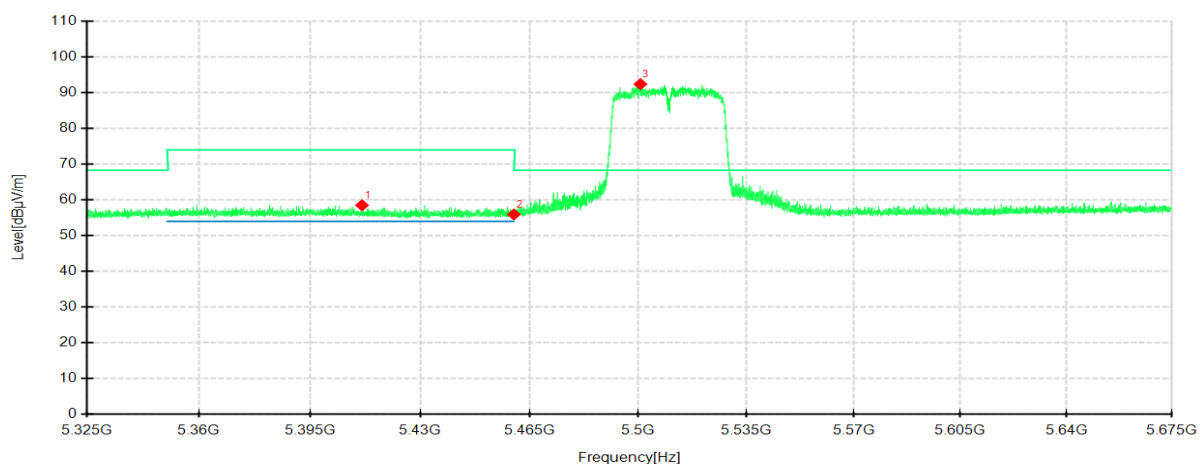


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5400.04	41.90	58.94	17.04	74.00	15.06	200	257	Horizontal	/
2	5460	40.75	57.72	16.97	68.30	10.58	100	211	Horizontal	/
3	5508.015	75.26	92.52	17.26	-	-	200	42	Horizontal	No limit
1	5411.555	41.73	58.49	16.76	74.00	15.51	100	335	Vertical	/
2	5460	39.39	55.94	16.55	68.30	12.36	200	218	Vertical	/
3	5500.7	75.53	92.35	16.82	-	-	200	186	Vertical	No limit

802.11ac VHT40 mode/5510MHz


Detector mode: Average

Polarity: Horizontal

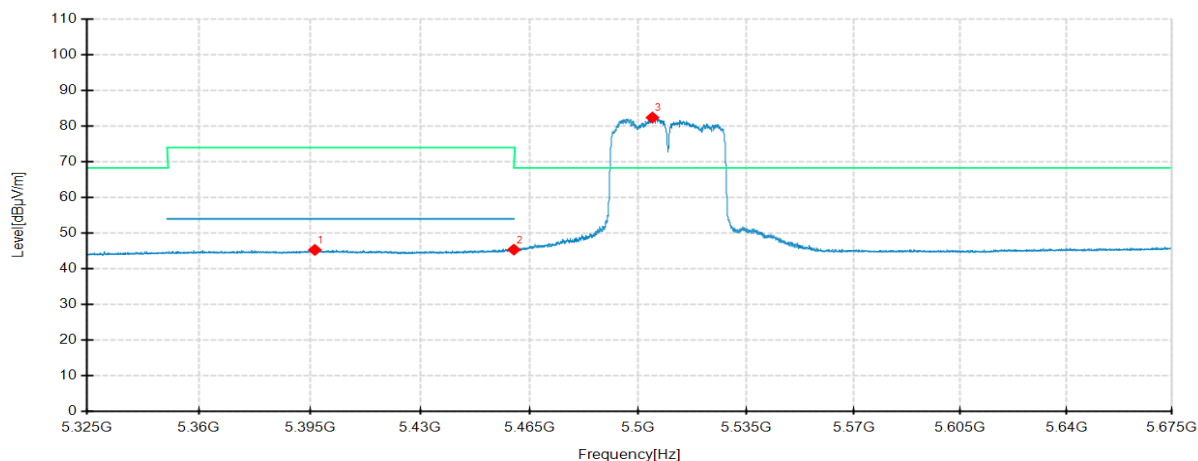

Detector mode: Average


Polarity: Vertical

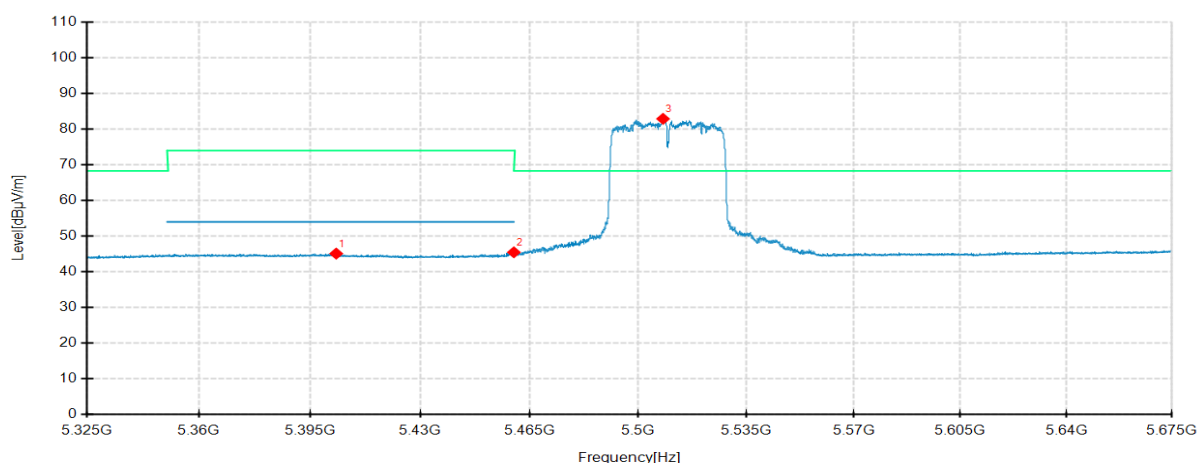

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5396.61	28.31	45.31	17.00	54.00	8.69	100	218	Horizontal	/
2	5460	28.42	45.39	16.97	54.00	8.61	100	283	Horizontal	/
3	5504.585	65.10	82.39	17.29	-	-	200	54	Horizontal	No limit
1	5403.365	28.31	45.12	16.81	54.00	8.88	100	258	Vertical	/
2	5460	28.93	45.48	16.55	54.00	8.52	200	188	Vertical	/
3	5508.015	66.08	82.87	16.79	-	-	200	188	Vertical	No limit


802.11ac VHT40 mode/5670MHz
Detector mode: Peak

Polarity: Horizontal

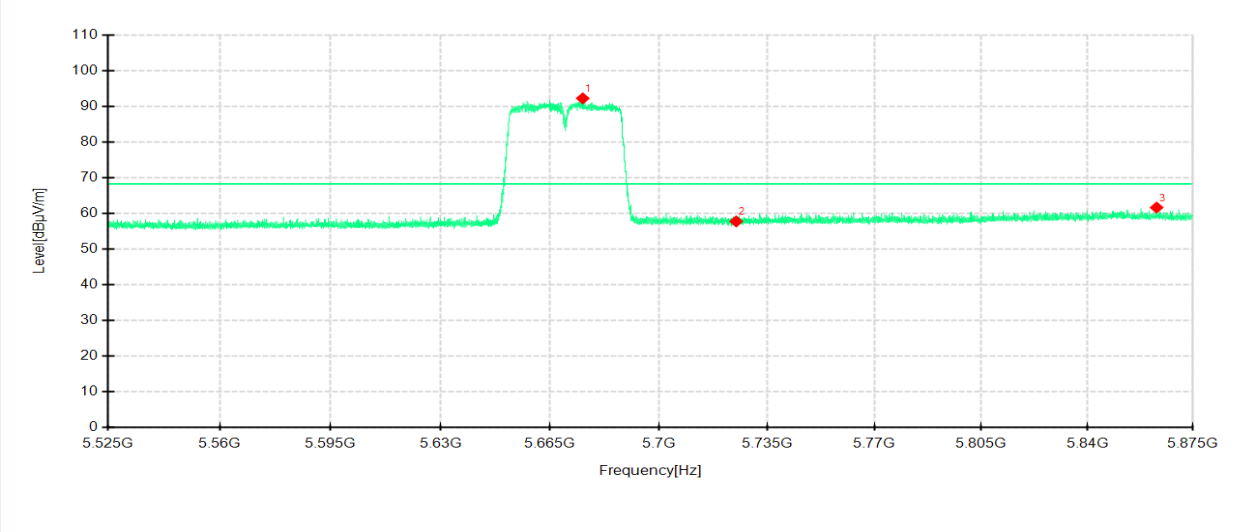

Detector mode: Peak

Polarity: Vertical

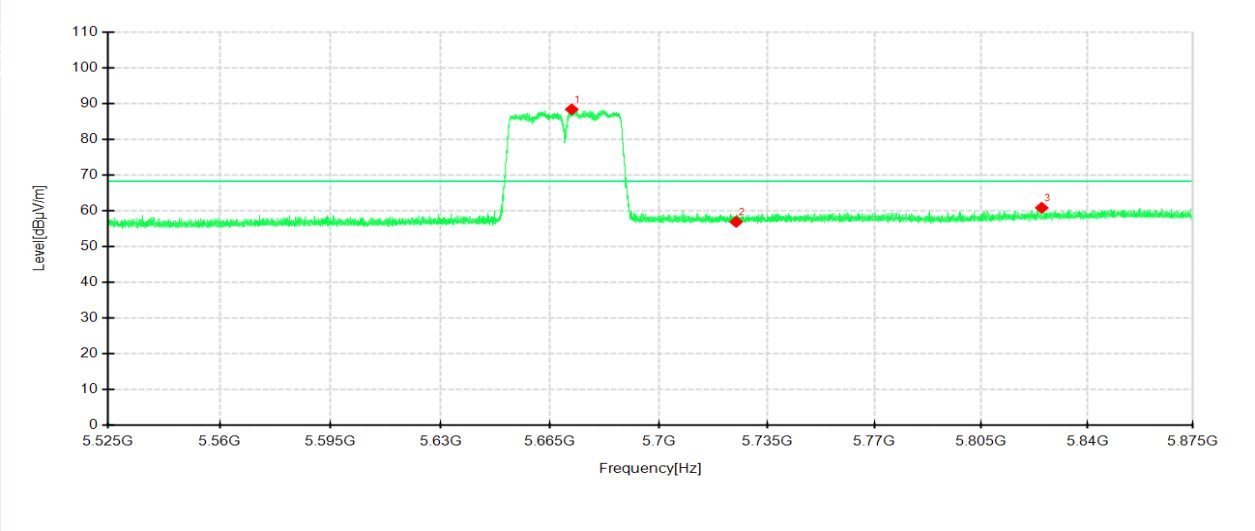


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5675.465	74.48	92.24	17.76	-	-	200	275	Horizontal	No limit
2	5725	39.62	57.78	18.16	68.30	10.52	100	161	Horizontal	/
3	5862.925	42.08	61.66	19.58	68.30	6.64	100	248	Horizontal	/
1	5671.93	70.70	88.38	17.68	-	-	200	141	Vertical	No limit
2	5725	38.91	56.92	18.01	68.30	11.38	200	109	Vertical	/
3	5824.915	42.04	60.85	18.81	68.30	7.45	100	80	Vertical	/

802.11ac VHT40 mode/5670MHz


Detector mode: Average

Polarity: Horizontal

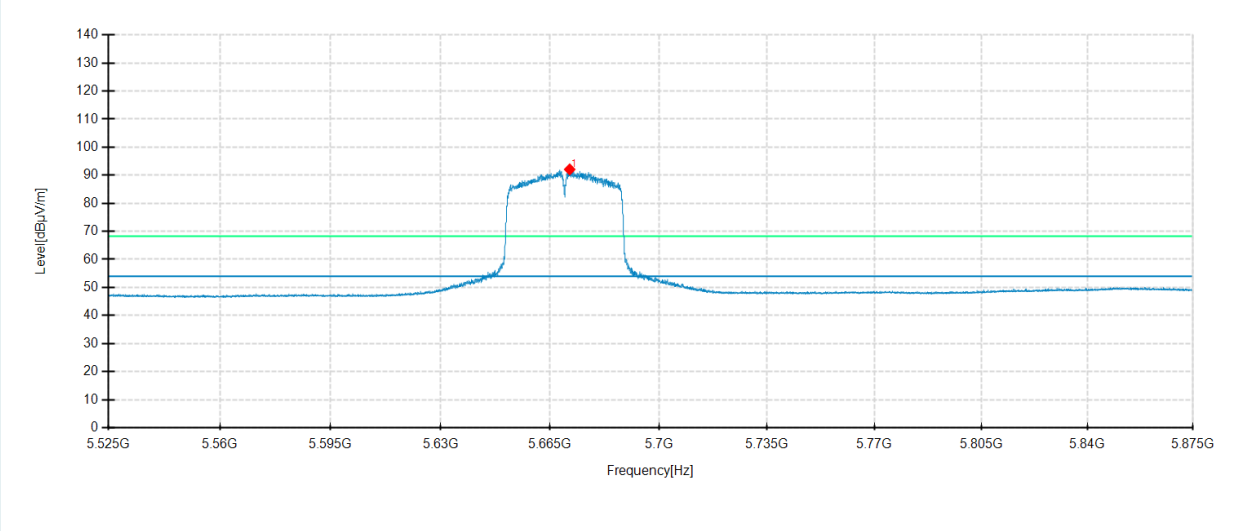

Detector mode: Average

Polarity: Vertical

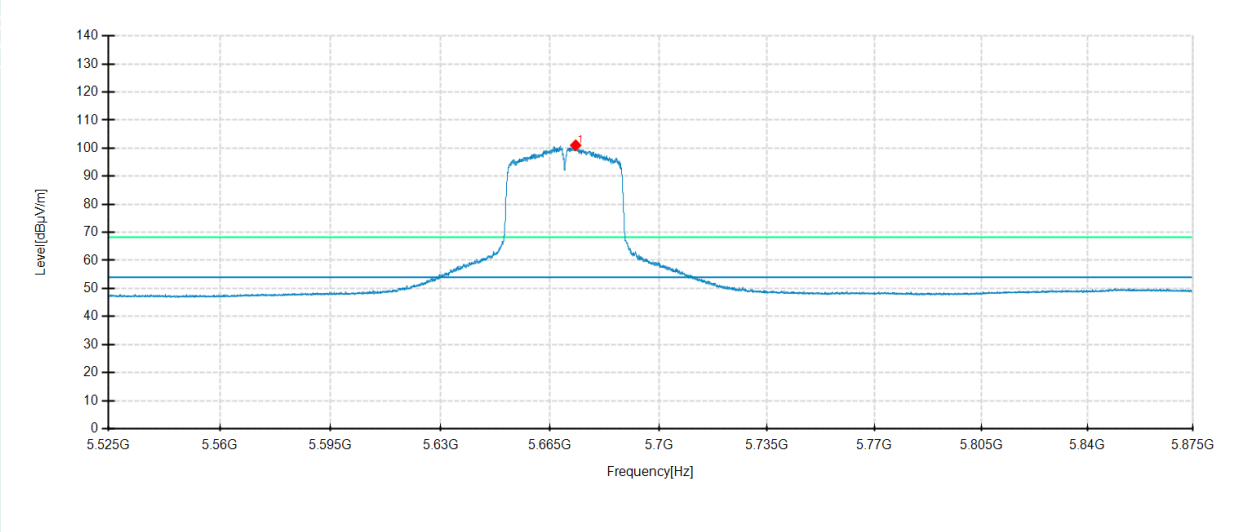


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5671.265	72.30	92.08	19.78	54.00	-38.08	200	26	Horizontal	No limit
1	5673.19	81.32	101.02	19.70	54.00	-47.02	200	52	Vertical	No limit

802.11ax HE40 mode/5190MHz


Detector mode: Peak

Polarity: Horizontal

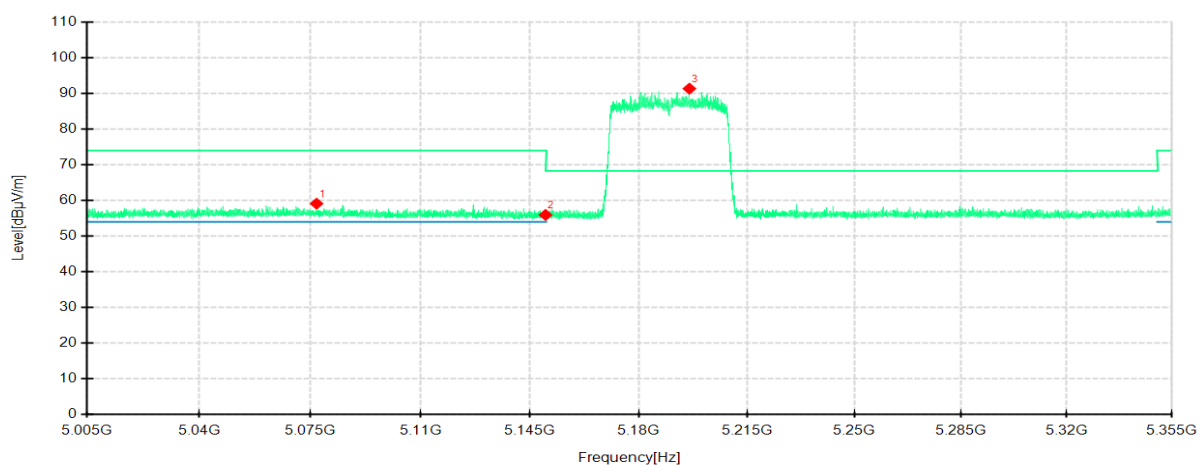

Detector mode: Peak

Polarity: Vertical

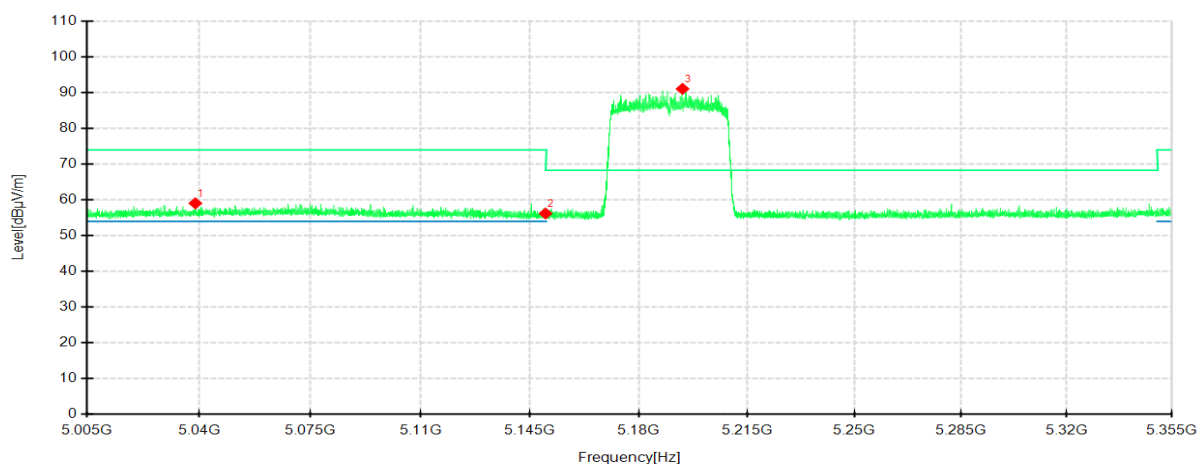


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5077.03	42.53	59.12	16.59	74.00	14.88	100	300	Horizontal	/
2	5150	39.67	55.95	16.28	68.30	12.35	200	86	Horizontal	/
3	5196.38	74.83	91.32	16.49	-	-	200	55	Horizontal	No limit
1	5038.81	42.39	59.04	16.65	74.00	14.96	200	222	Vertical	/
2	5150	40.11	56.19	16.08	68.30	12.11	100	335	Vertical	/
3	5194.14	74.85	91.03	16.18	-	-	200	200	Vertical	No limit

802.11ax HE40 mode/5190MHz


Detector mode: Average

Polarity: Horizontal

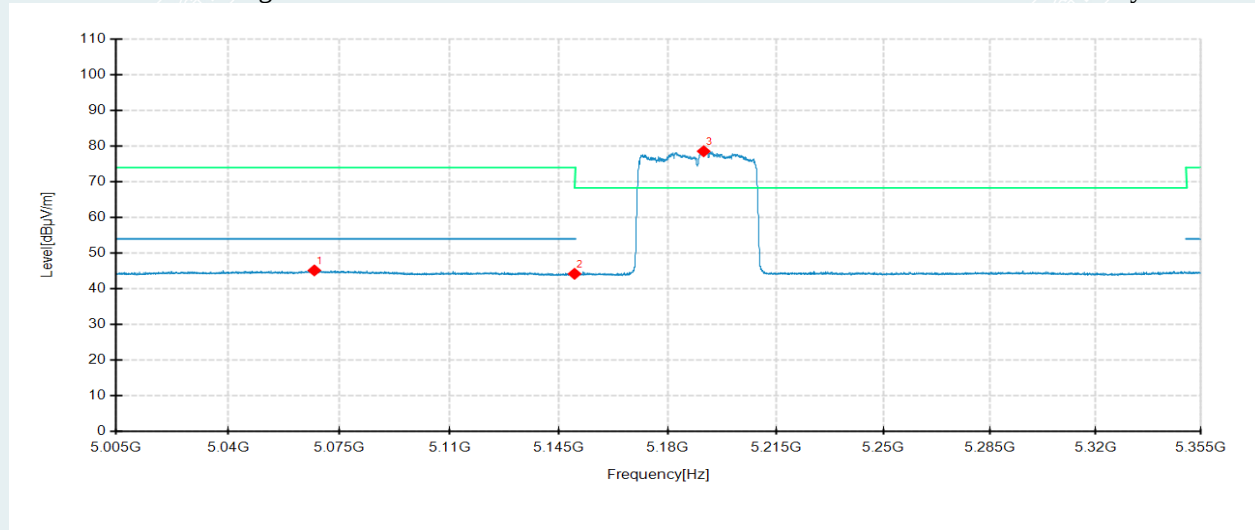

Detector mode: Average

Polarity: Vertical

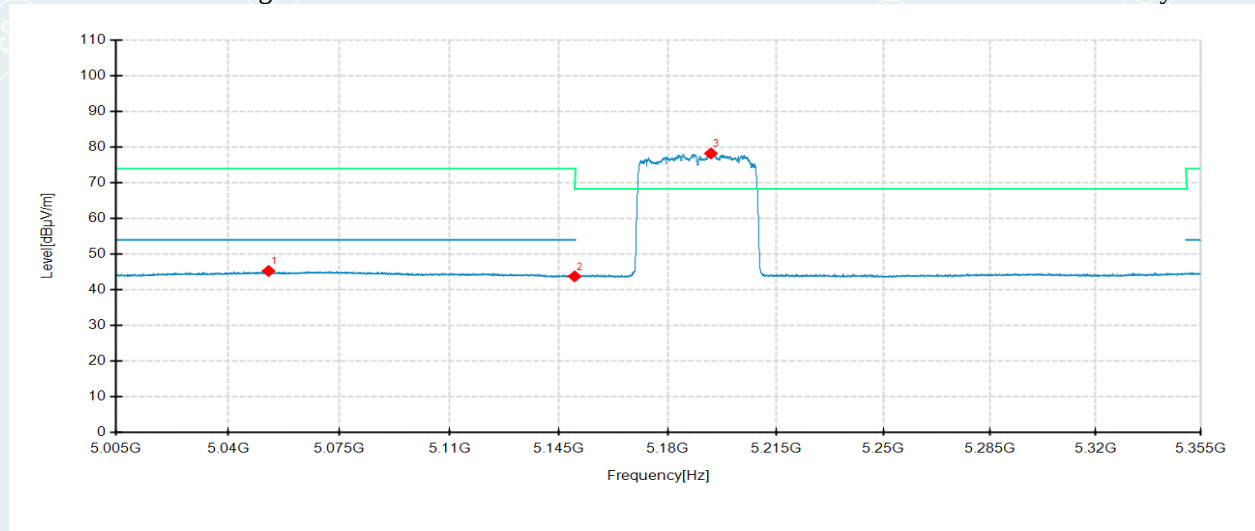


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5067.16	28.53	45.17	16.64	54.00	8.83	100	102	Horizontal	/
2	5150	27.94	44.22	16.28	54.00	9.78	100	102	Horizontal	/
3	5191.62	62.08	78.55	16.47	-	-	100	80	Horizontal	No limit
1	5052.705	28.47	45.29	16.82	54.00	8.71	200	149	Vertical	/
2	5150	27.70	43.78	16.08	54.00	10.22	100	277	Vertical	/
3	5193.93	62.04	78.22	16.18	-	-	200	199	Vertical	No limit

802.11ax HE40 mode/5230MHz


Detector mode: Peak

Polarity: Horizontal

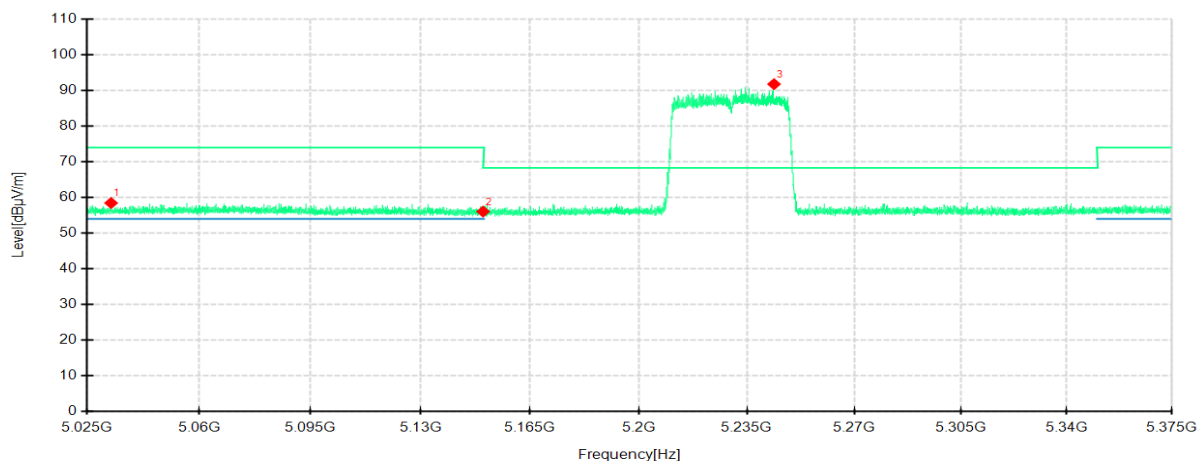

Detector mode: Peak

Polarity: Vertical

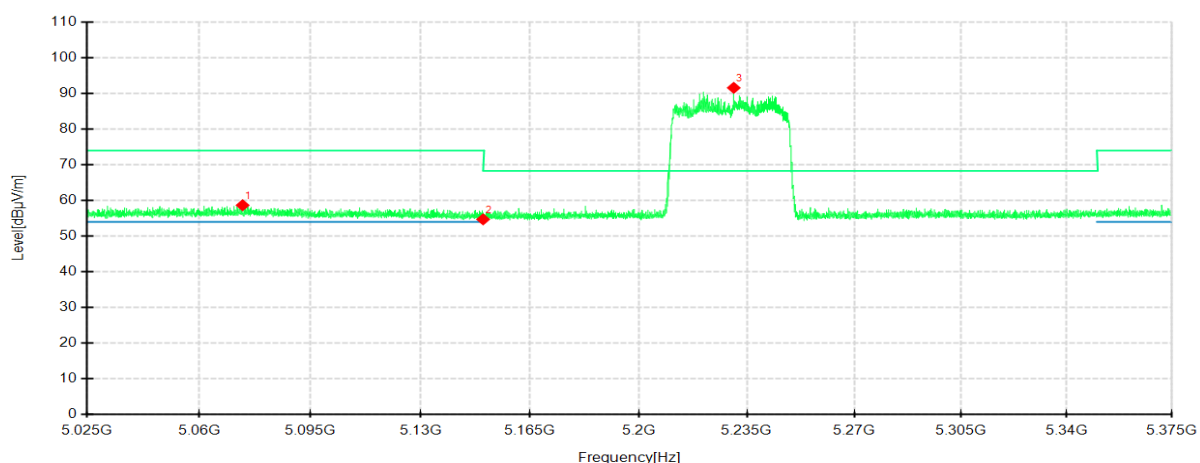


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5032.42	41.90	58.45	16.55	74.00	15.55	100	356	Horizontal	/
2	5150	39.78	56.06	16.28	68.30	12.24	100	197	Horizontal	/
3	5243.855	75.33	91.74	16.41	-	-	200	66	Horizontal	No limit
1	5073.685	41.95	58.66	16.71	74.00	15.34	200	27	Vertical	/
2	5150	38.63	54.71	16.08	68.30	13.59	200	218	Vertical	/
3	5230.765	75.47	91.55	16.08	-	-	200	187	Vertical	No limit

802.11ax HE40 mode/5230MHz


Detector mode: Average

Polarity: Horizontal

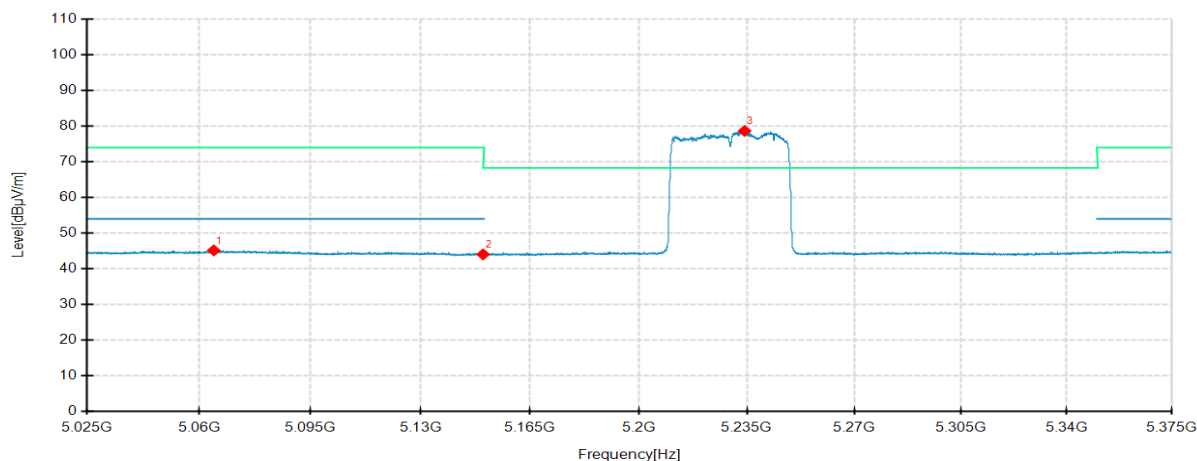

Detector mode: Average

Polarity: Vertical

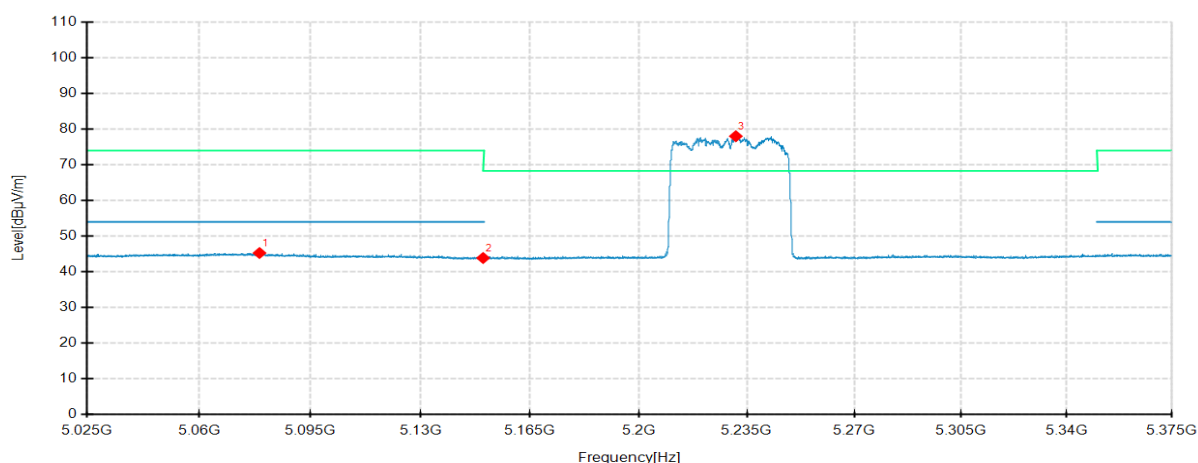


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5064.62	28.54	45.19	16.65	54.00	8.81	200	343	Horizontal	/
2	5150	27.78	44.06	16.28	54.00	9.94	200	333	Horizontal	/
3	5234.3	62.22	78.65	16.43	-	-	200	66	Horizontal	No limit
1	5079.005	28.61	45.29	16.68	54.00	8.71	200	109	Vertical	/
2	5150	27.80	43.88	16.08	54.00	10.12	200	88	Vertical	/
3	5231.43	61.93	78.00	16.07	-	-	200	190	Vertical	No limit

802.11ax HE40 mode/5270MHz


Detector mode: Peak

Polarity: Horizontal

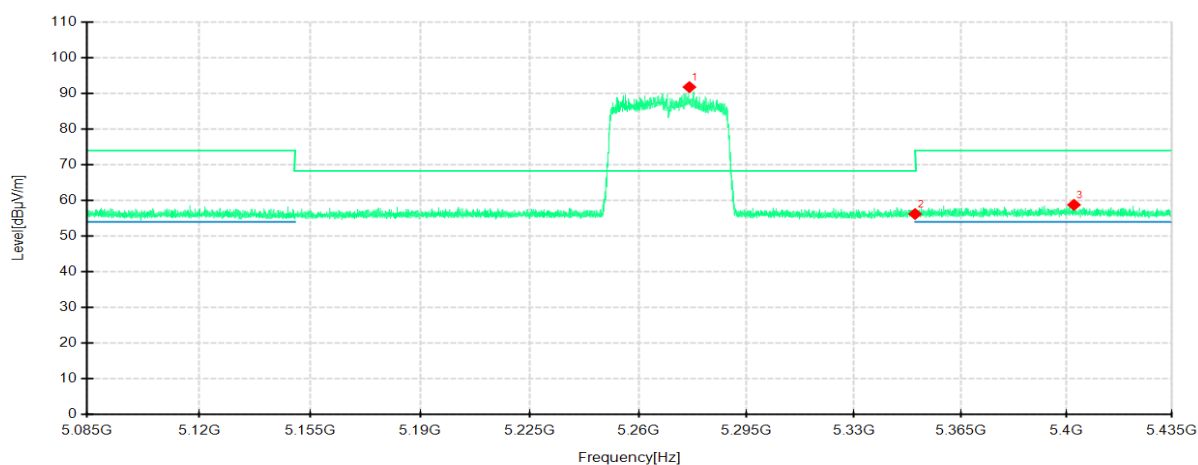

Detector mode: Peak

Polarity: Vertical

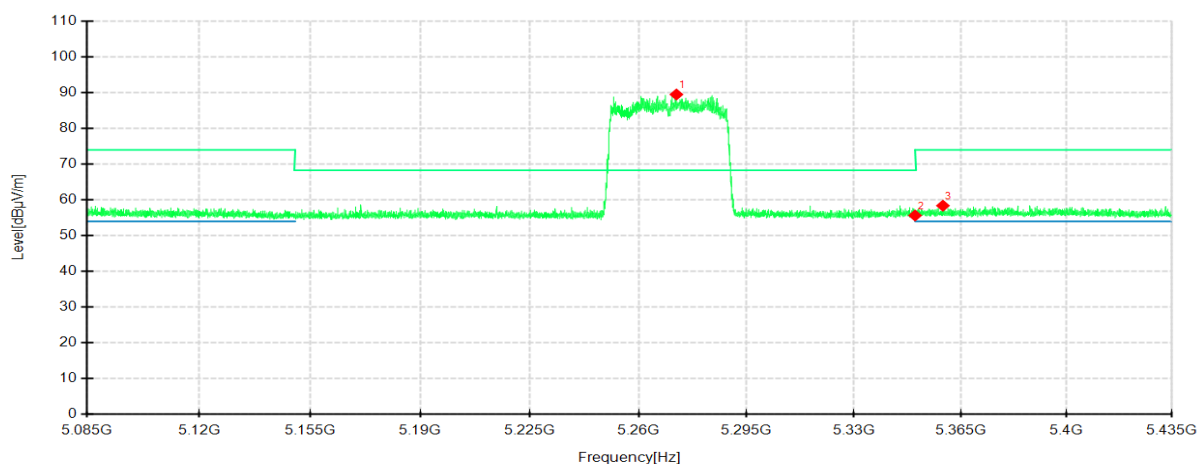


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5276.415	75.37	91.76	16.39	-	-	200	56	Horizontal	No limit
2	5350	39.67	56.21	16.54	68.30	12.09	200	90	Horizontal	/
3	5402.45	41.75	58.78	17.03	74.00	15.22	200	2	Horizontal	/
1	5272.215	73.34	89.47	16.13	-	-	200	194	Vertical	No limit
2	5350	39.09	55.63	16.54	68.30	12.67	100	176	Vertical	/
3	5359.155	41.78	58.37	16.59	74.00	15.63	200	15	Vertical	/

802.11ax HE40 mode/5270MHz


Detector mode: Average

Polarity: Horizontal

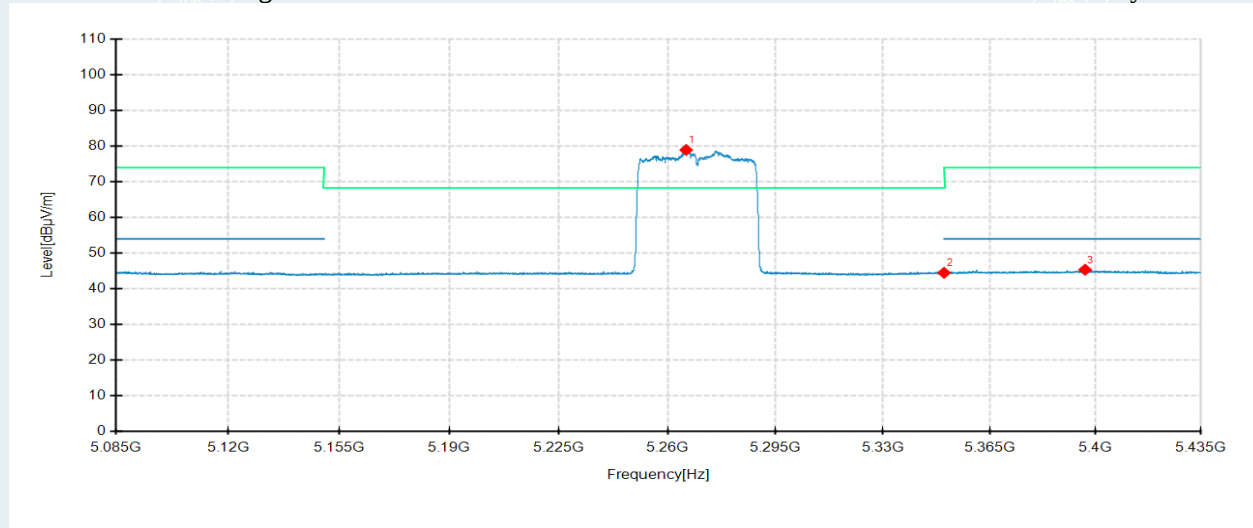

Detector mode: Average


Polarity: Vertical

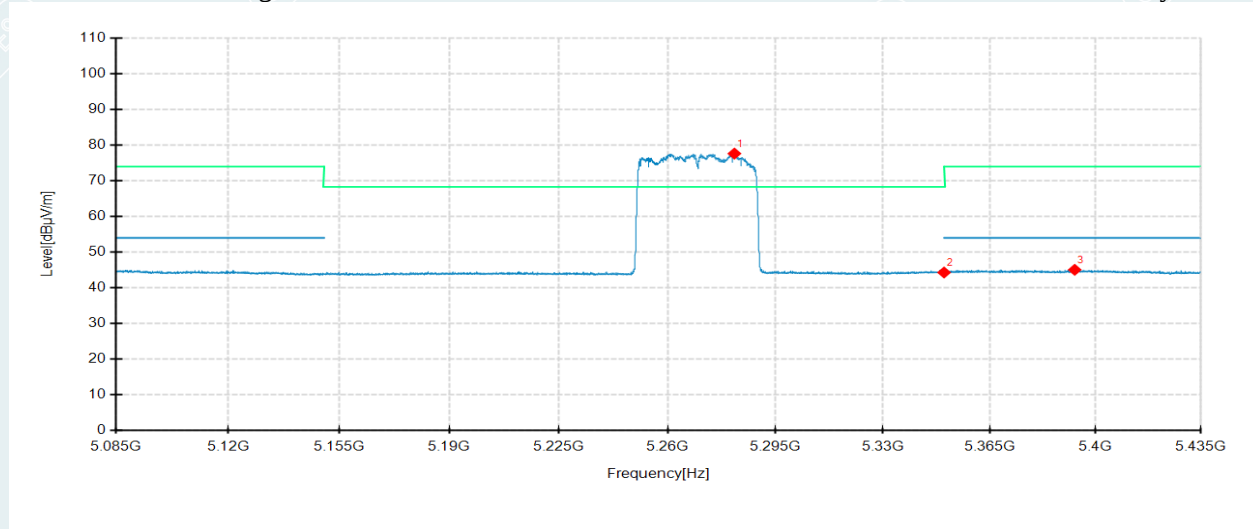

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5265.985	62.52	78.92	16.40	-	-	200	54	Horizontal	No limit
2	5350	27.96	44.50	16.54	54.00	9.50	100	224	Horizontal	/
3	5396.5	28.37	45.37	17.00	54.00	8.63	100	40	Horizontal	/
1	5281.595	61.44	77.62	16.18	-	-	200	191	Vertical	No limit
2	5350	27.76	44.30	16.54	54.00	9.70	100	66	Vertical	/
3	5393.07	28.27	45.06	16.79	54.00	8.94	200	150	Vertical	/


802.11ax HE40 mode/5310MHz
Detector mode: Peak

Polarity: Horizontal

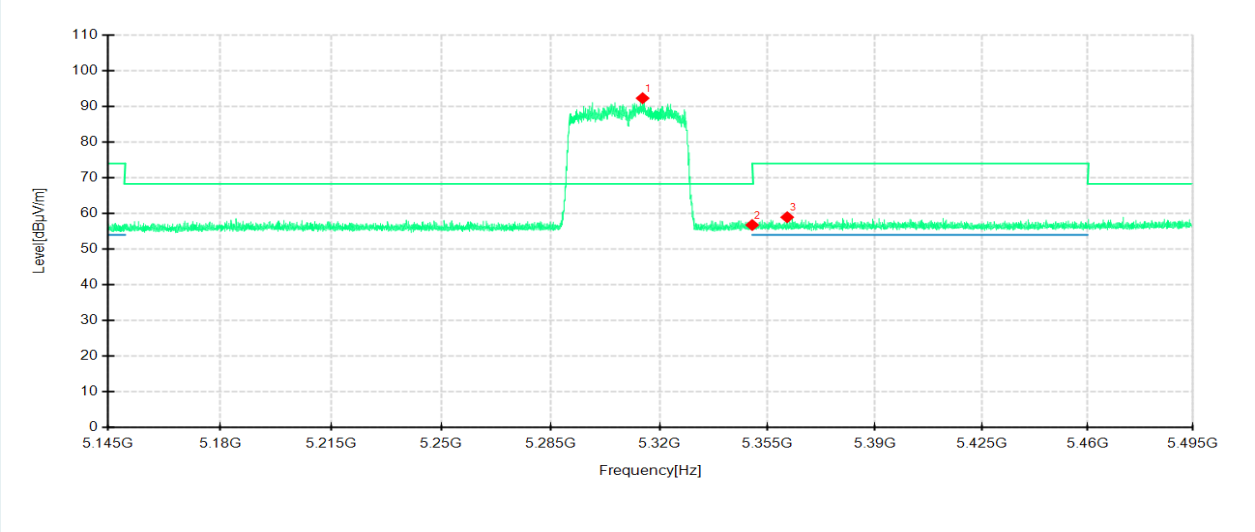

Detector mode: Peak

Polarity: Vertical

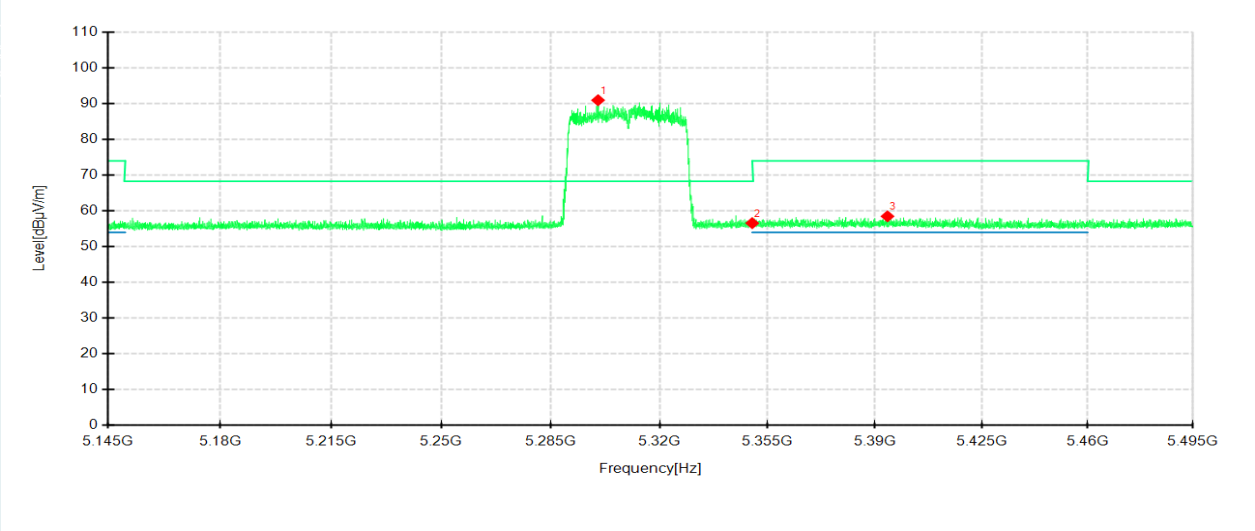


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5314.54	75.86	92.29	16.43	-	-	200	63	Horizontal	No limit
2	5350	40.23	56.77	16.54	68.30	11.53	200	104	Horizontal	/
3	5361.37	42.30	58.95	16.65	74.00	15.05	100	201	Horizontal	/
1	5300.19	74.65	90.94	16.29	-	-	200	188	Vertical	No limit
2	5350	40.03	56.57	16.54	68.30	11.73	200	199	Vertical	/
3	5394.095	41.68	58.48	16.80	74.00	15.52	200	58	Vertical	/

802.11ax HE40 mode/5310MHz


Detector mode: Average

Polarity: Horizontal

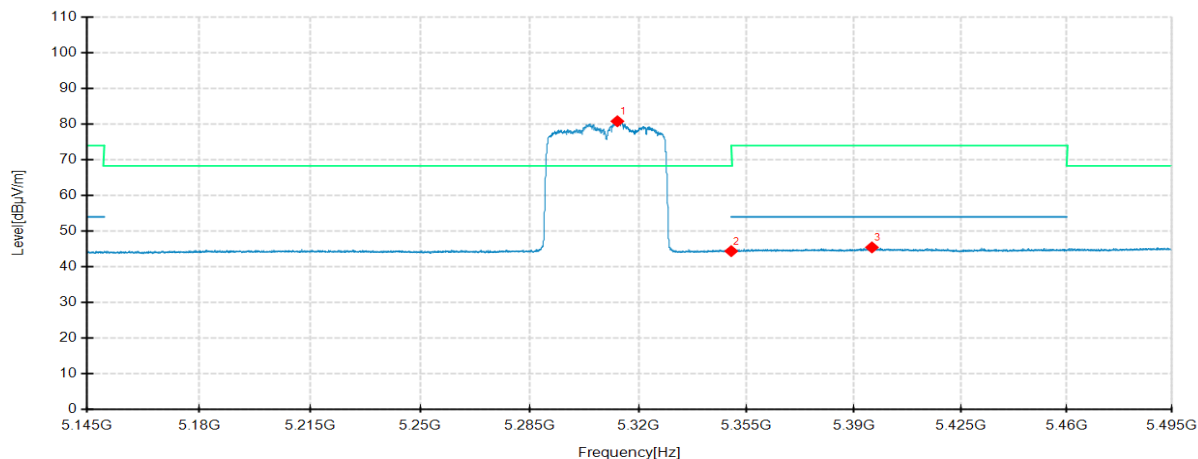

Detector mode: Average

Polarity: Vertical

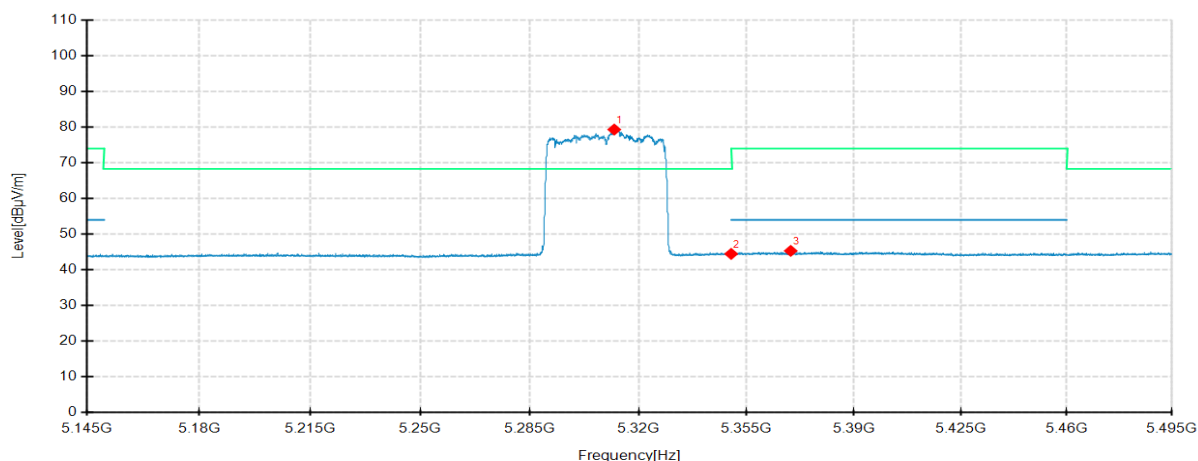


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5313.175	64.36	80.79	16.43	-	-	200	59	Horizontal	No limit
2	5350	27.87	44.41	16.54	54.00	9.59	100	90	Horizontal	/
3	5395.88	28.45	45.45	17.00	54.00	8.55	100	344	Horizontal	/
1	5312.16	62.96	79.31	16.35	-	-	200	197	Vertical	No limit
2	5350	27.94	44.48	16.54	54.00	9.52	100	333	Vertical	/
3	5369.35	28.68	45.33	16.65	54.00	8.67	100	286	Vertical	/

802.11ax HE40 mode/5510MHz


Detector mode: Peak

Polarity: Horizontal

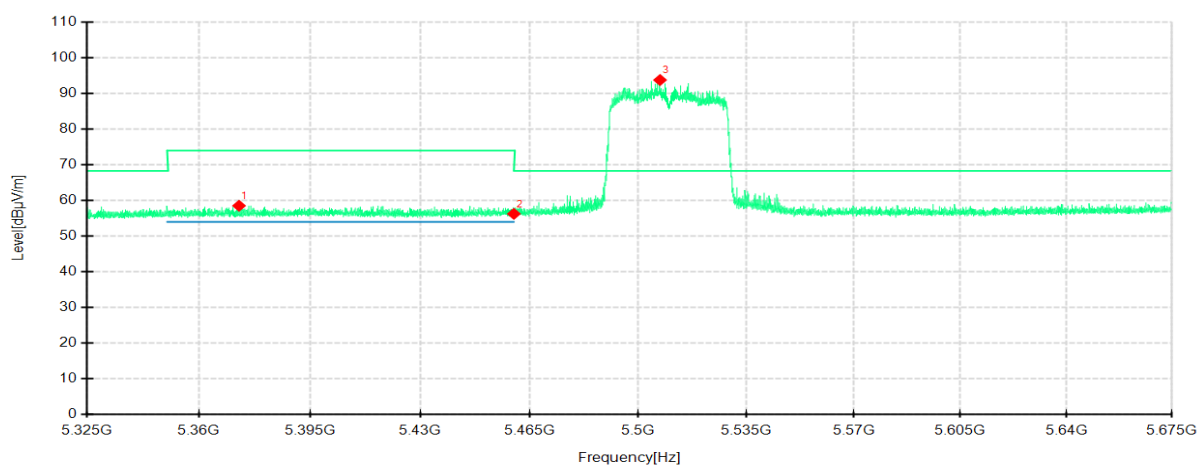

Detector mode: Peak

Polarity: Vertical

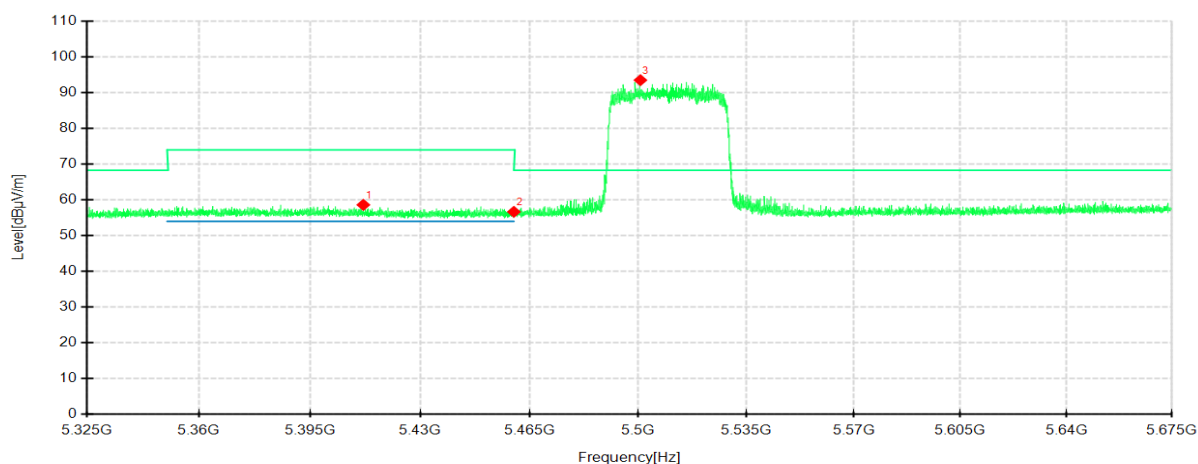


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5372.635	41.75	58.52	16.77	74.00	15.48	200	264	Horizontal	/
2	5460	39.29	56.26	16.97	68.30	12.04	200	284	Horizontal	/
3	5507.035	76.48	93.74	17.26	-	-	200	48	Horizontal	No limit
1	5411.975	41.84	58.60	16.76	74.00	15.40	100	17	Vertical	/
2	5460	40.11	56.66	16.55	68.30	11.64	100	151	Vertical	/
3	5500.7	76.66	93.48	16.82	-	-	200	189	Vertical	No limit

802.11ax HE40 mode/5510MHz


Detector mode: Average

Polarity: Horizontal

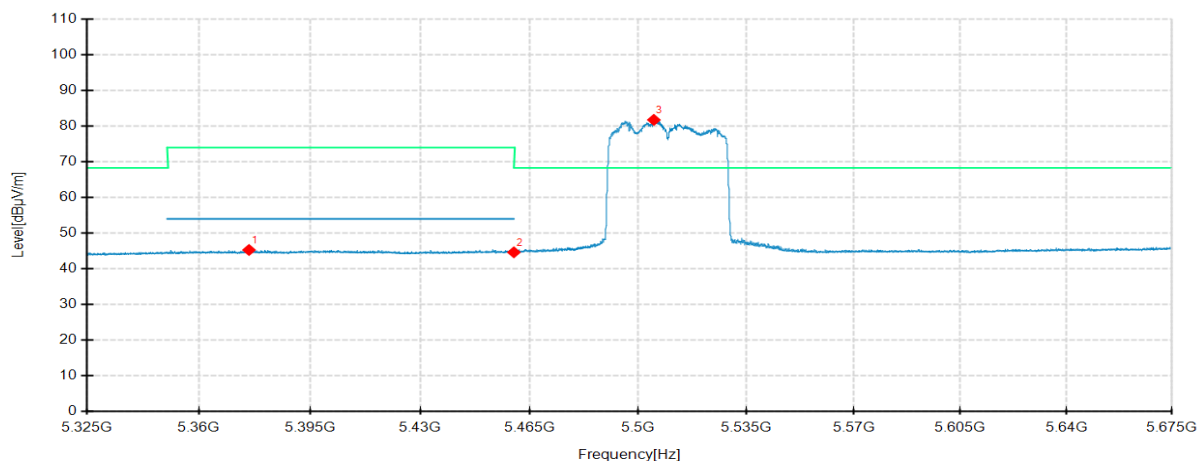

Detector mode: Average


Polarity: Vertical

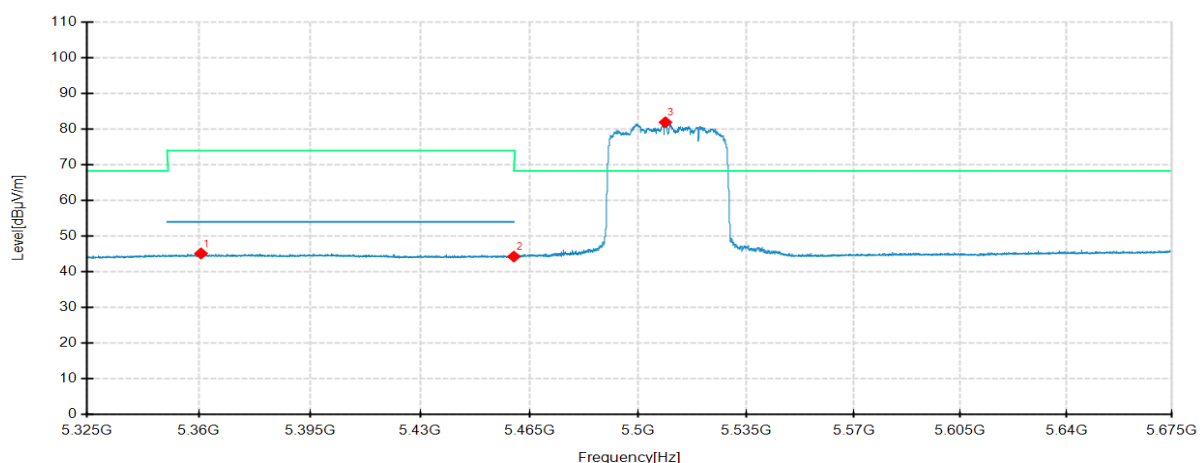

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5375.785	28.50	45.30	16.80	54.00	8.70	100	199	Horizontal	/
2	5460	27.67	44.64	16.97	54.00	9.36	200	189	Horizontal	/
3	5505.04	64.45	81.74	17.29	-	-	200	47	Horizontal	No limit
1	5360.665	28.56	45.17	16.61	54.00	8.83	200	89	Vertical	/
2	5460	27.74	44.29	16.55	54.00	9.71	200	171	Vertical	/
3	5508.785	65.12	81.91	16.79	-	-	200	181	Vertical	No limit


802.11ax HE40 mode/5670MHz
Detector mode: Peak

Polarity: Horizontal

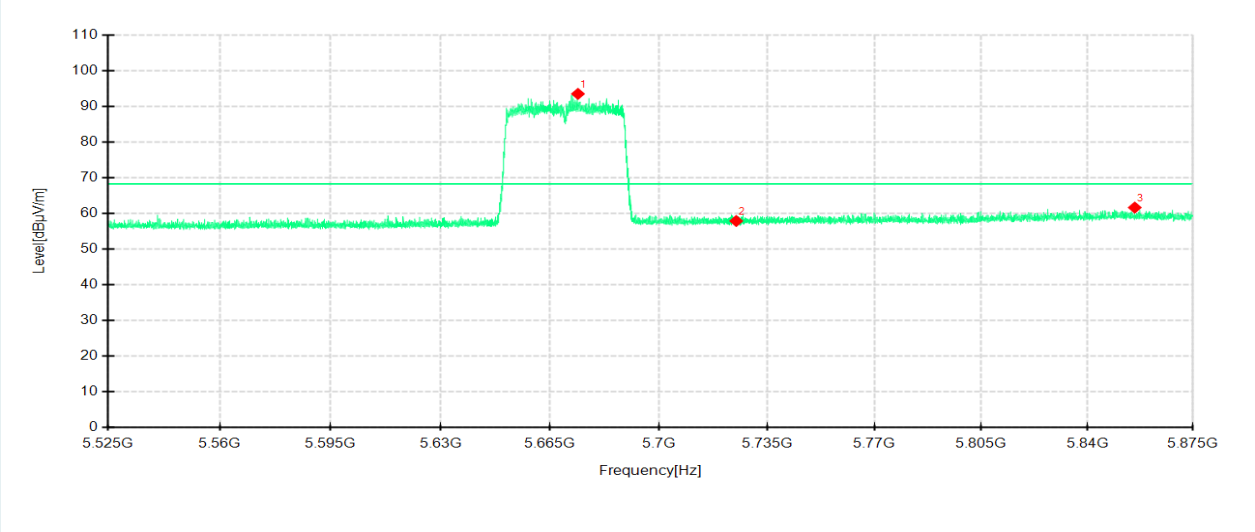

Detector mode: Peak

Polarity: Vertical

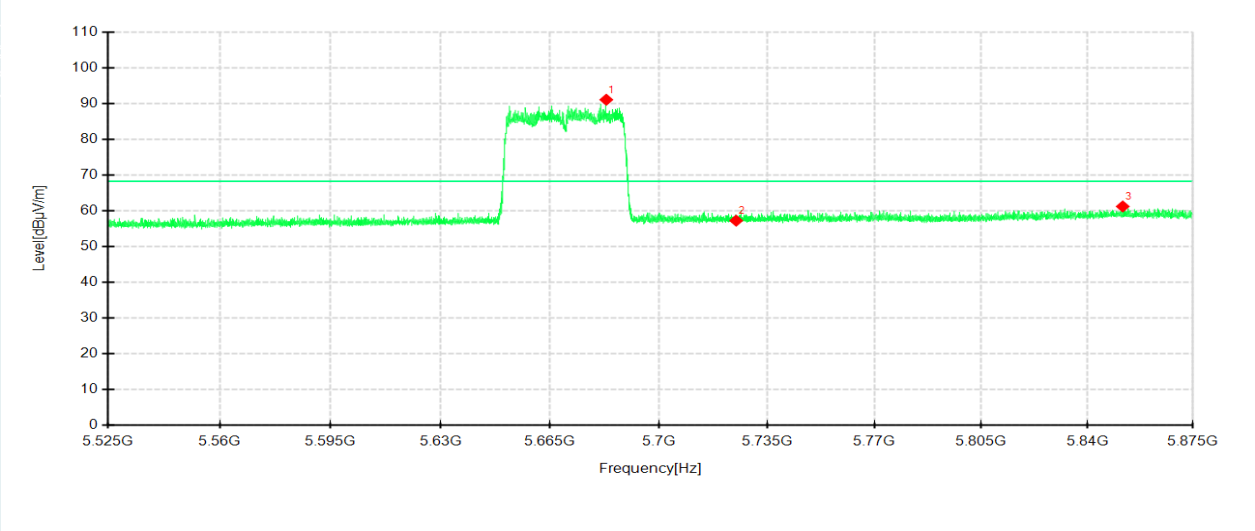


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5673.925	75.75	93.50	17.75	-	-	200	279	Horizontal	No limit
2	5725	39.74	57.90	18.16	68.30	10.40	200	342	Horizontal	/
3	5855.68	41.97	61.66	19.69	68.30	6.64	200	205	Horizontal	/
1	5683.025	73.32	91.08	17.76	-	-	200	138	Vertical	No limit
2	5725	39.26	57.27	18.01	68.30	11.03	100	114	Vertical	/
3	5851.69	41.78	61.24	19.46	68.30	7.06	200	204	Vertical	/

802.11ax HE40 mode/5670MHz


Detector mode: Average

Polarity: Horizontal

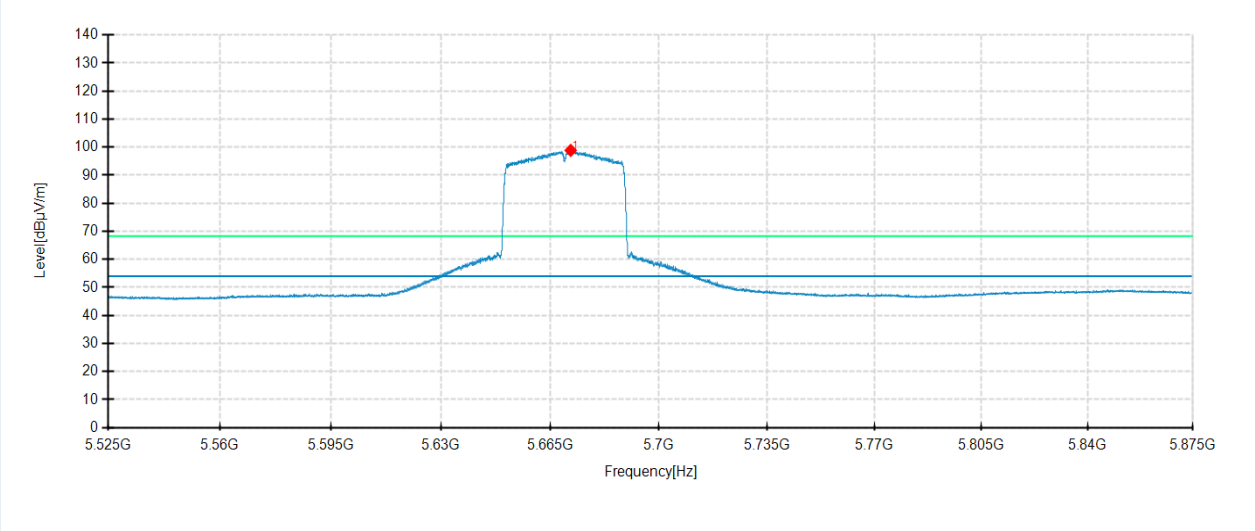

Detector mode: Average

Polarity: Vertical

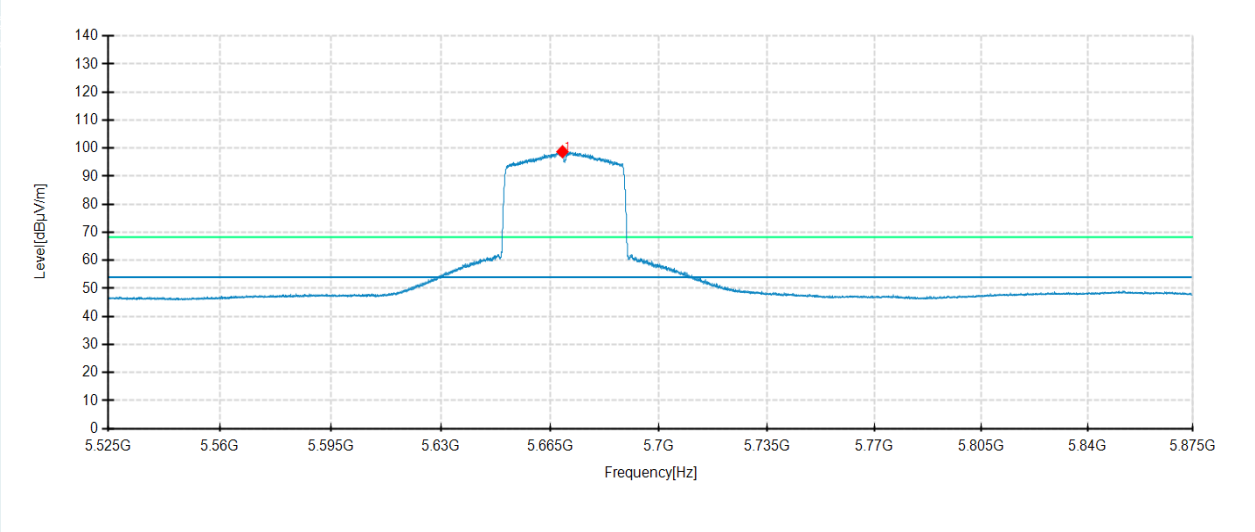


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5671.58	79.09	98.87	19.78	54.00	-44.87	100	148	Horizontal	No limit
1	5668.955	79.08	98.76	19.68	54.00	-44.76	200	138	Vertical	No limit

802.11ac VHT80 mode/5210MHz


Detector mode: Peak

Polarity: Horizontal

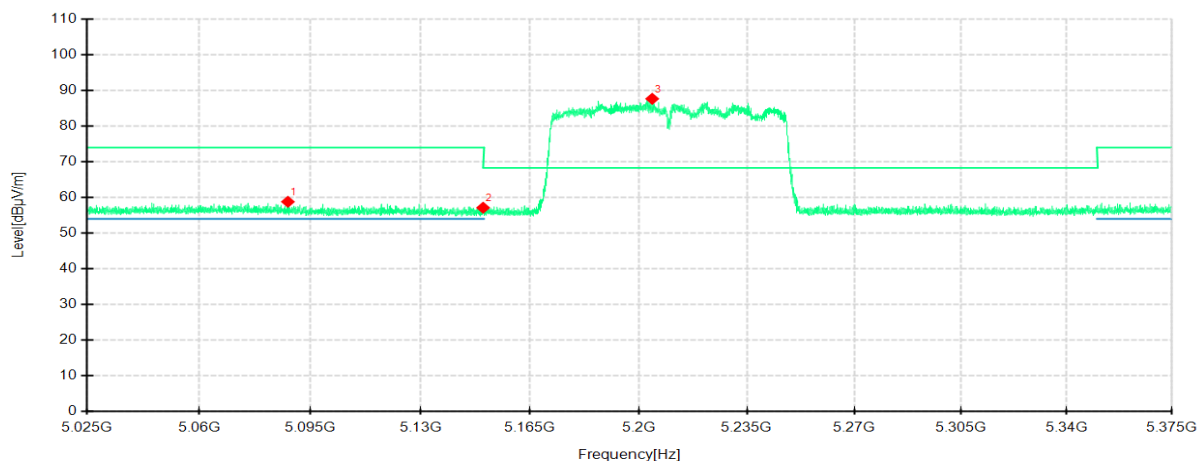

Detector mode: Peak

Polarity: Vertical

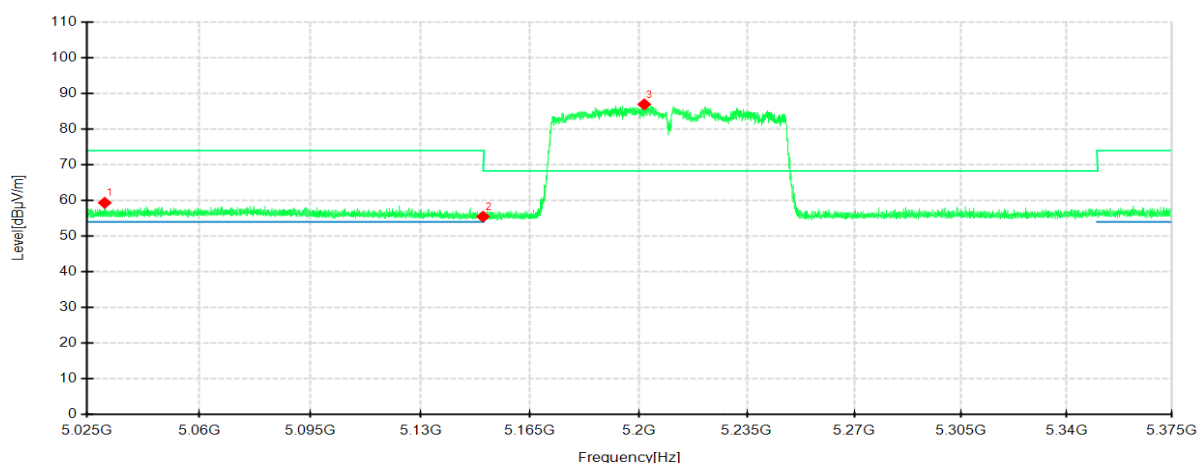


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5087.965	42.27	58.80	16.53	74.00	15.20	100	253	Horizontal	/
2	5150	40.85	57.13	16.28	68.30	11.17	100	192	Horizontal	/
3	5204.34	71.15	87.64	16.49	-	-	200	195	Horizontal	No limit
1	5030.425	42.84	59.36	16.52	74.00	14.64	200	179	Vertical	/
2	5150	39.40	55.48	16.08	68.30	12.82	200	316	Vertical	/
3	5201.785	70.74	86.93	16.19	-	-	200	201	Vertical	No limit

802.11ac VHT80 mode/5210MHz


Detector mode: Average

Polarity: Horizontal

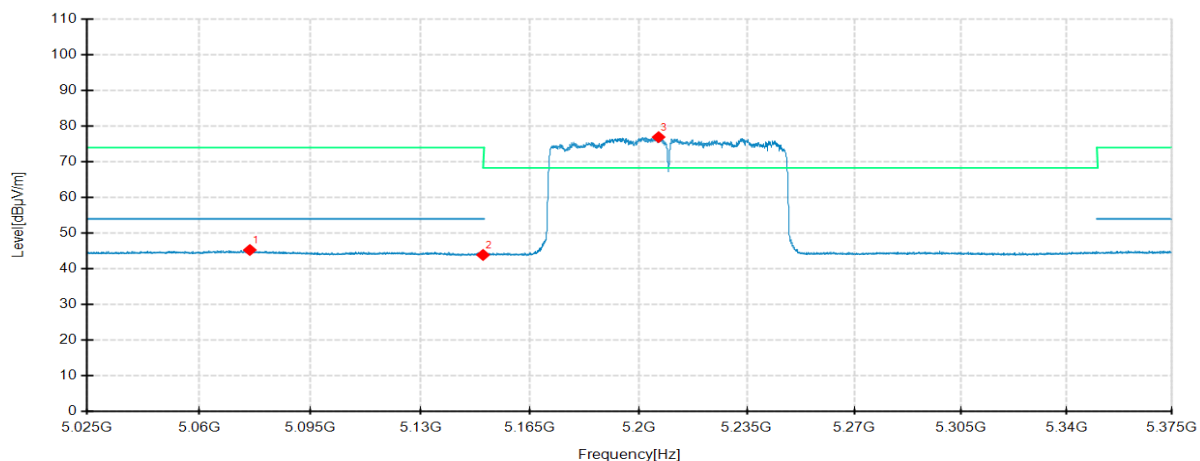

Detector mode: Average

Polarity: Vertical

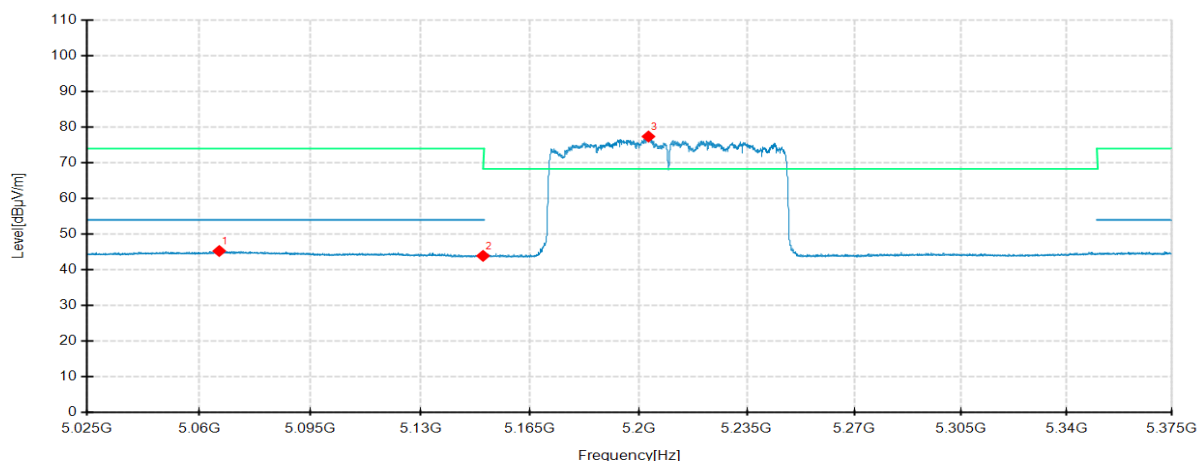


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5075.96	28.69	45.29	16.60	54.00	8.71	200	205	Horizontal	/
2	5150	27.62	43.90	16.28	54.00	10.10	200	29	Horizontal	/
3	5206.405	60.41	76.90	16.49	-	-	200	48	Horizontal	No limit
1	5066.335	28.54	45.29	16.75	54.00	8.71	200	256	Vertical	/
2	5150	27.85	43.93	16.08	54.00	10.07	200	327	Vertical	/
3	5203.15	61.17	77.36	16.19	-	-	200	192	Vertical	No limit

802.11ac VHT80 mode/5290MHz


Detector mode: Peak

Polarity: Horizontal

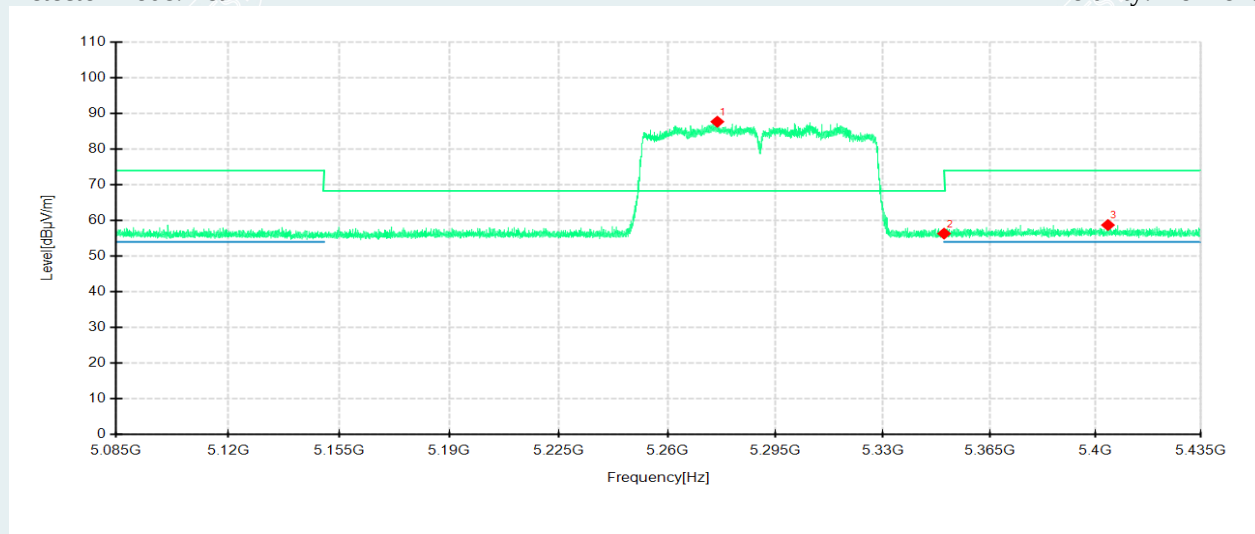

Detector mode: Peak

Polarity: Vertical

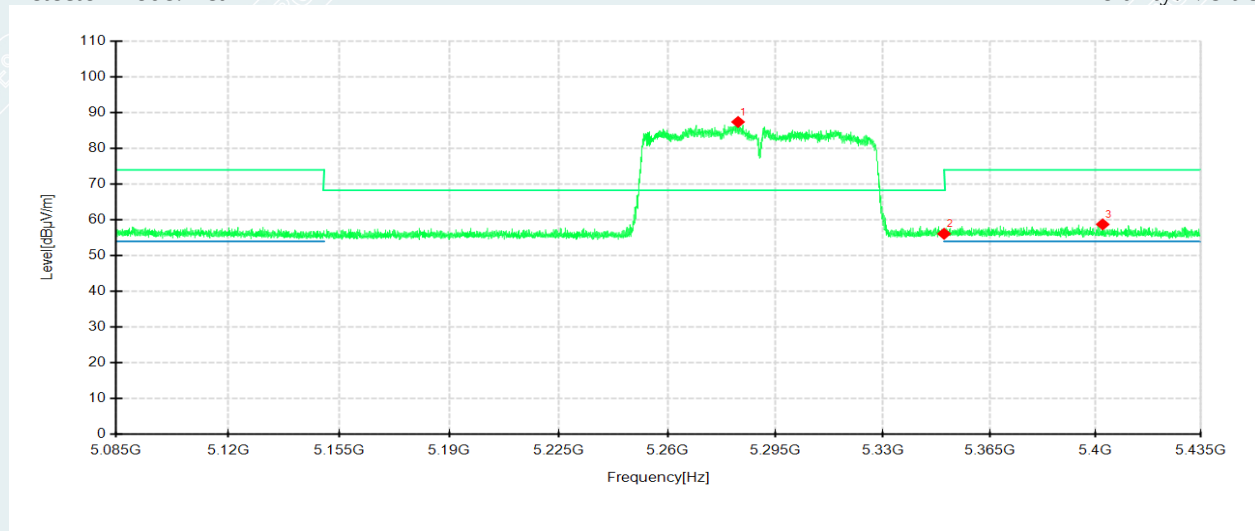


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5276.065	71.28	87.67	16.39	-	-	200	55	Horizontal	No limit
2	5350	39.79	56.33	16.54	68.30	11.97	200	345	Horizontal	/
3	5404.095	41.69	58.72	17.03	74.00	15.28	100	90	Horizontal	/
1	5282.785	71.19	87.38	16.19	-	-	200	192	Vertical	No limit
2	5350	39.57	56.11	16.54	68.30	12.19	100	0	Vertical	/
3	5402.345	41.91	58.74	16.83	74.00	15.26	200	83	Vertical	/

802.11ac VHT80 mode/5290MHz


Detector mode: Average

Polarity: Horizontal

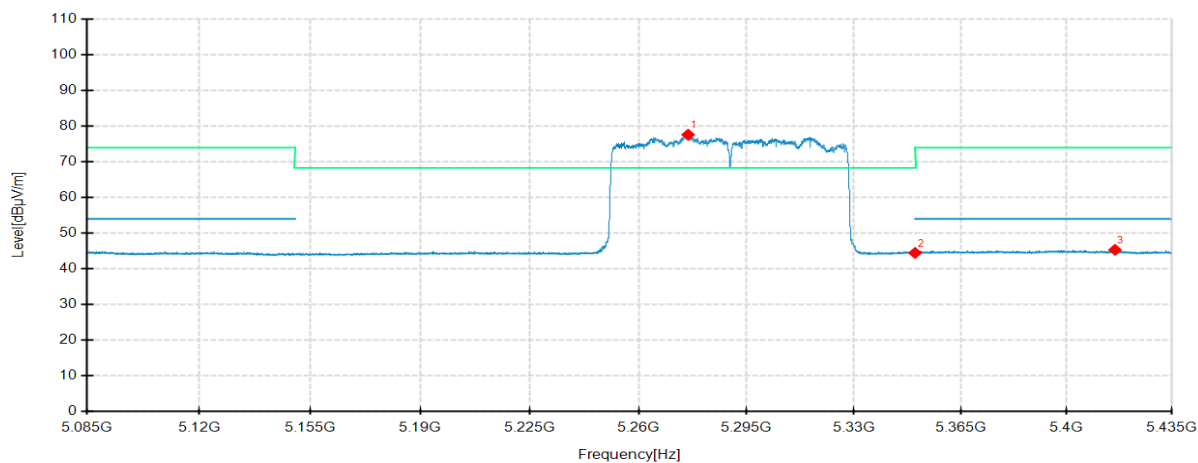

Detector mode: Average

Polarity: Vertical

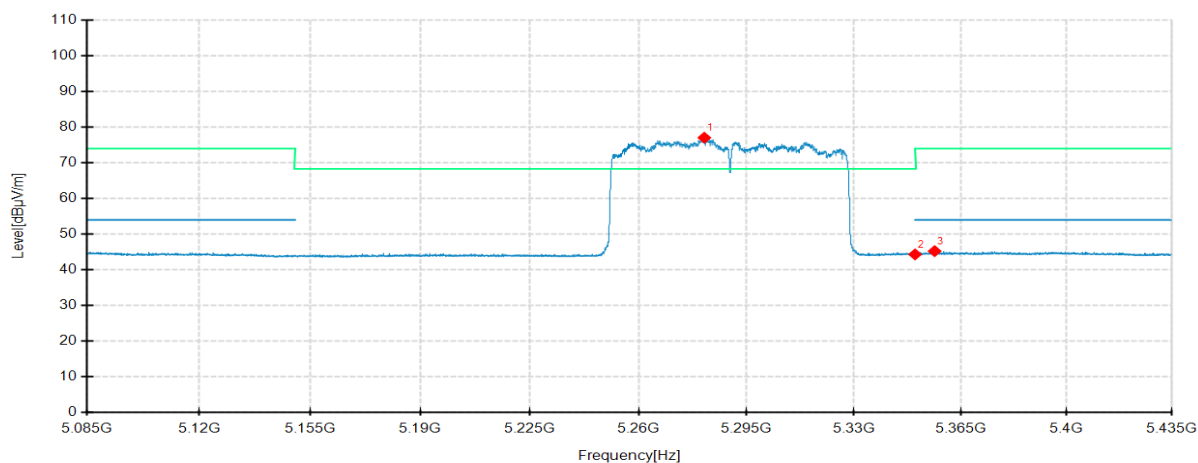


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5275.995	61.19	77.58	16.39	-	-	200	50	Horizontal	No limit
2	5350	27.93	44.47	16.54	54.00	9.53	100	124	Horizontal	/
3	5416.065	28.34	45.33	16.99	54.00	8.67	200	142	Horizontal	/
1	5281.245	60.84	77.02	16.18	-	-	200	195	Vertical	No limit
2	5350	27.80	44.34	16.54	54.00	9.66	200	252	Vertical	/
3	5356.425	28.67	45.25	16.58	54.00	8.75	100	146	Vertical	/

802.11ac VHT80 mode/5530MHz


Detector mode: Peak

Polarity: Horizontal

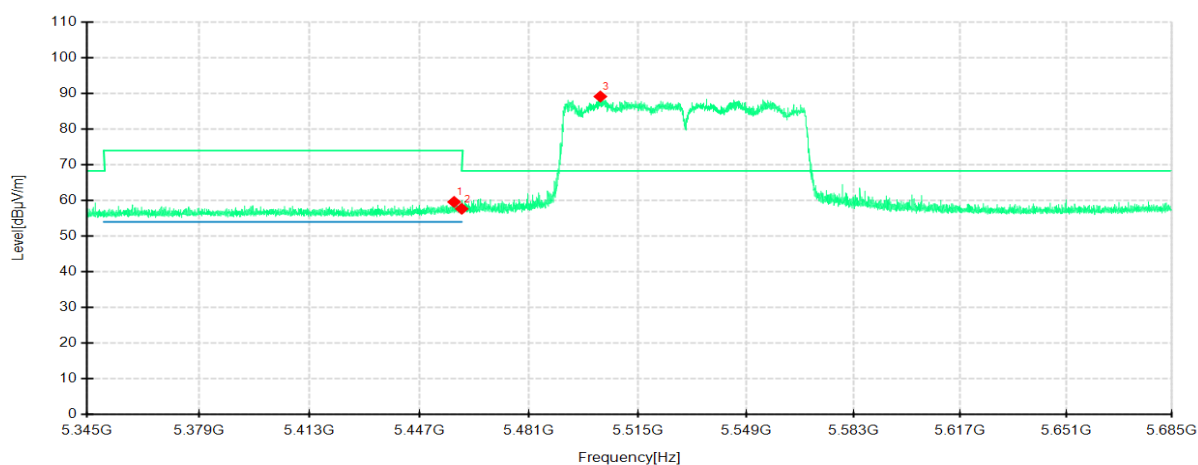

Detector mode: Peak

Polarity: Vertical

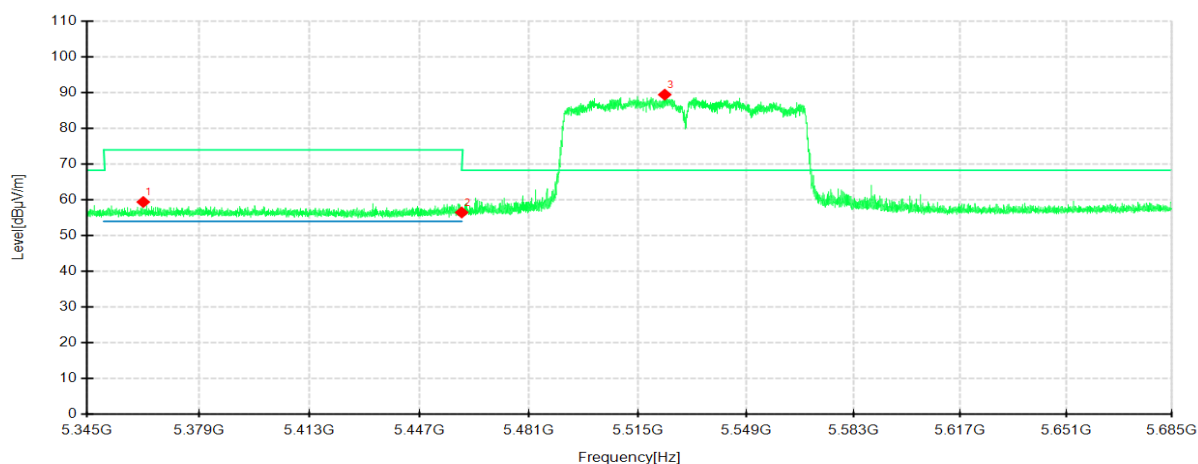


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5457.642	42.65	59.60	16.95	74.00	14.40	200	265	Horizontal	/
2	5460	40.70	57.67	16.97	68.30	10.63	200	58	Horizontal	/
3	5503.202	71.81	89.12	17.31	-	-	200	47	Horizontal	No limit
1	5362.034	42.78	59.40	16.62	74.00	14.60	100	291	Vertical	/
2	5460	39.93	56.48	16.55	68.30	11.82	100	85	Vertical	/
3	5523.398	72.70	89.42	16.72	-	-	200	202	Vertical	No limit

802.11ac VHT80 mode/5530MHz


Detector mode: Average

Polarity: Horizontal

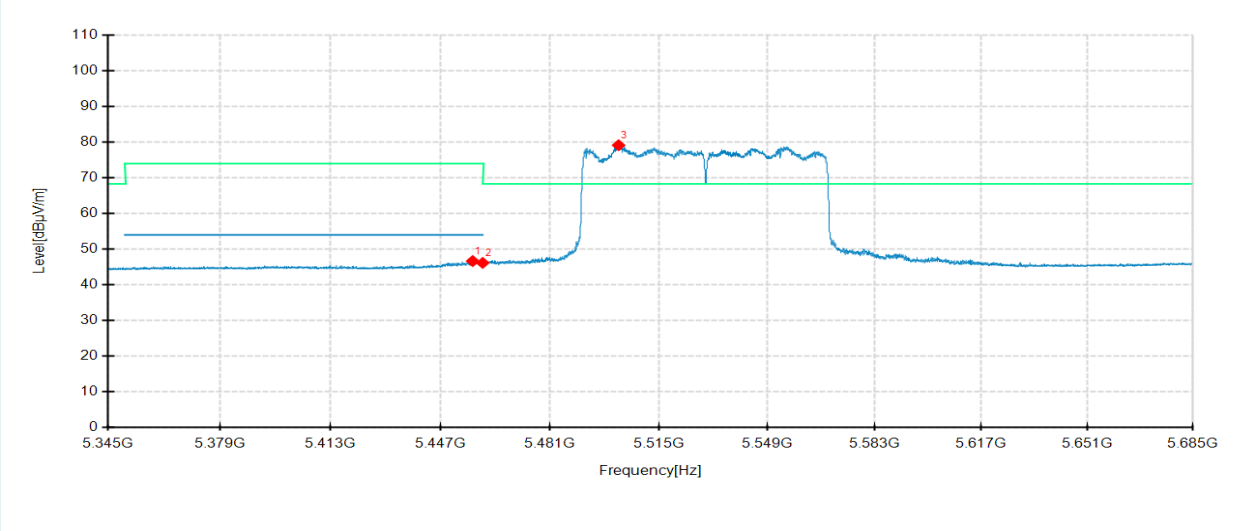

Detector mode: Average


Polarity: Vertical

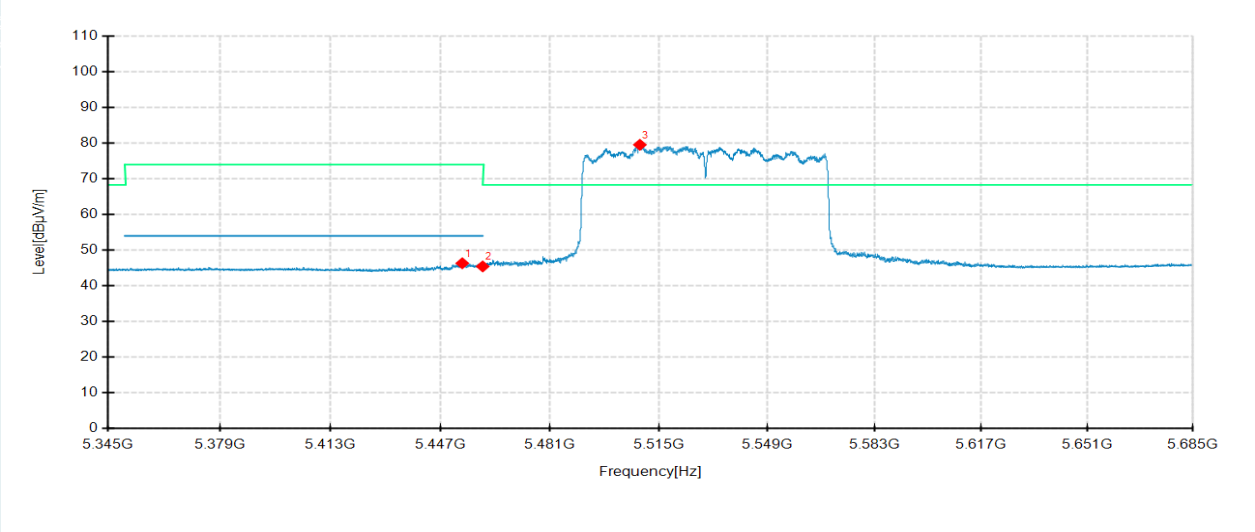

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5456.894	29.74	46.68	16.94	54.00	7.32	100	26	Horizontal	/
2	5460	29.19	46.16	16.97	54.00	7.84	200	178	Horizontal	/
3	5502.352	61.81	79.11	17.30	-	-	200	52	Horizontal	No limit
1	5453.664	29.83	46.33	16.50	54.00	7.67	200	186	Vertical	/
2	5460	28.90	45.45	16.55	54.00	8.55	100	180	Vertical	/
3	5509.016	62.74	79.52	16.78	-	-	200	186	Vertical	No limit


802.11ac VHT80 mode/5610MHz
Detector mode: Peak

Polarity: Horizontal

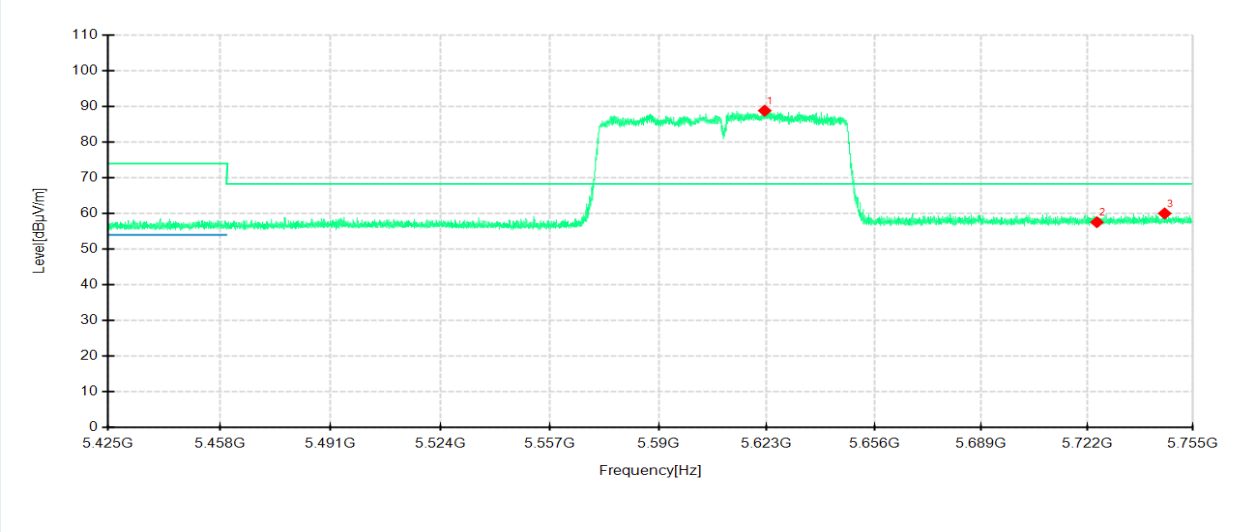

Detector mode: Peak

Polarity: Vertical

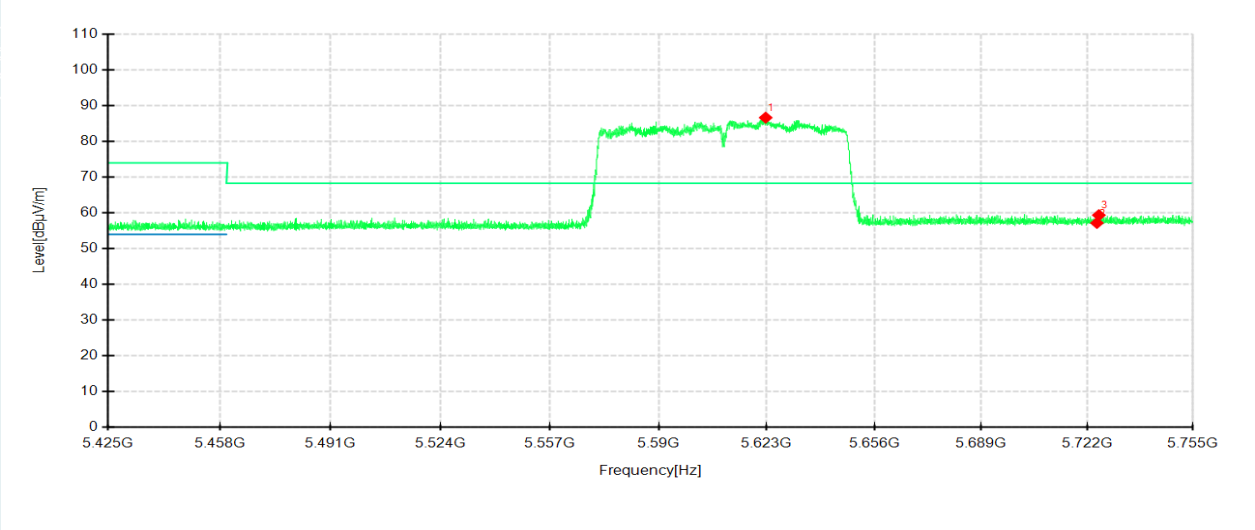


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5622.373	71.50	88.80	17.30	-	-	200	273	Horizontal	No limit
2	5725	39.39	57.55	18.16	68.30	10.75	100	129	Horizontal	/
3	5746.156	41.72	60.02	18.30	68.30	8.28	100	251	Horizontal	/
1	5622.67	69.31	86.62	17.31	-	-	200	138	Vertical	No limit
2	5725	39.16	57.17	18.01	68.30	11.13	200	138	Vertical	/
3	5725.597	41.35	59.36	18.01	68.30	8.94	100	287	Vertical	/

802.11ac VHT80 mode/5610MHz


Detector mode: Average

Polarity: Horizontal

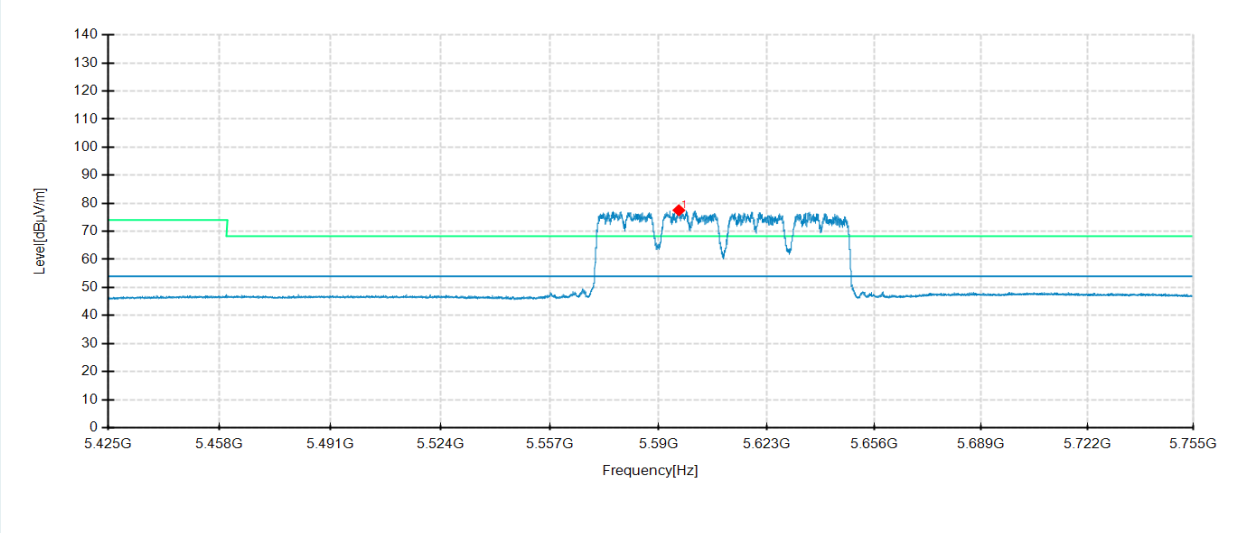

Detector mode: Average

Polarity: Vertical

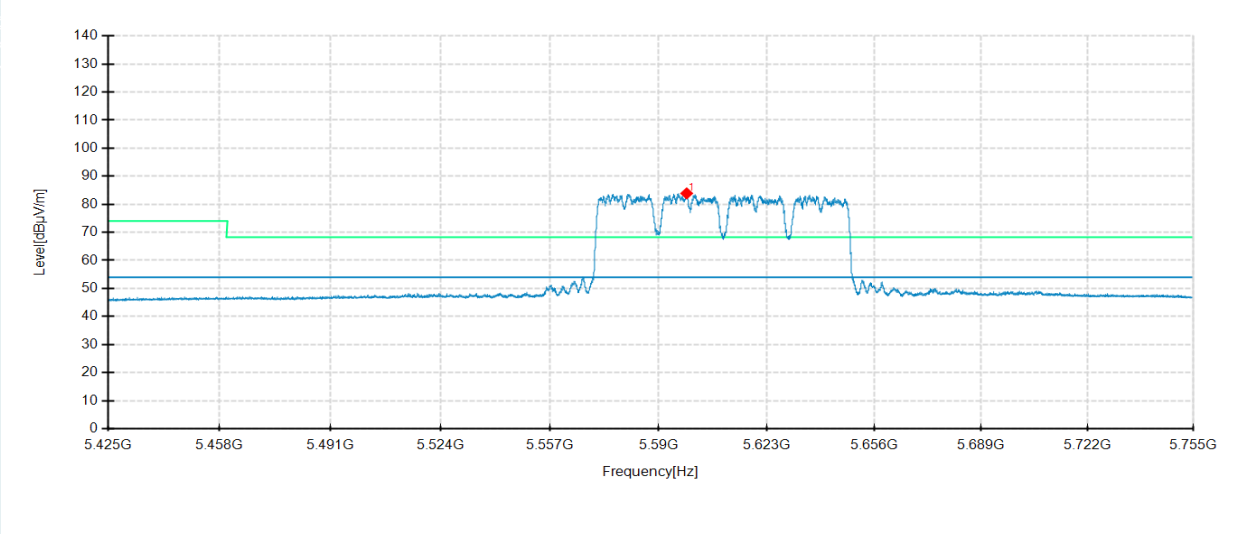


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5596.171	58.29	77.50	19.21	54.00	-23.50	200	210	Horizontal	No limit
1	5598.547	64.28	83.89	19.61	54.00	-29.89	200	162	Vertical	No limit

802.11ax HE80 mode/5210MHz


Detector mode: Peak

Polarity: Horizontal

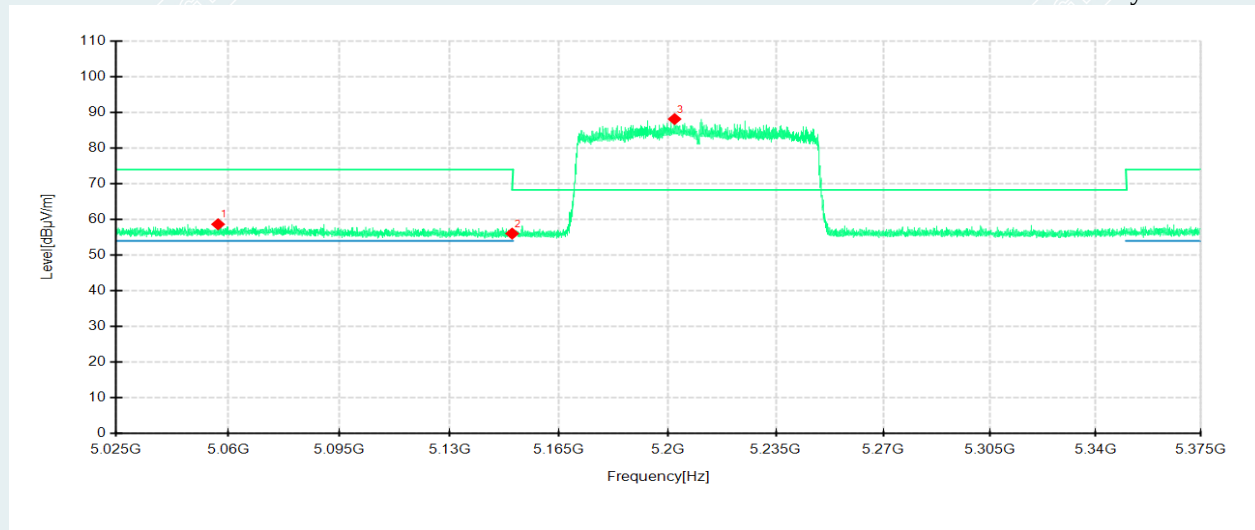

Detector mode: Peak

Polarity: Vertical

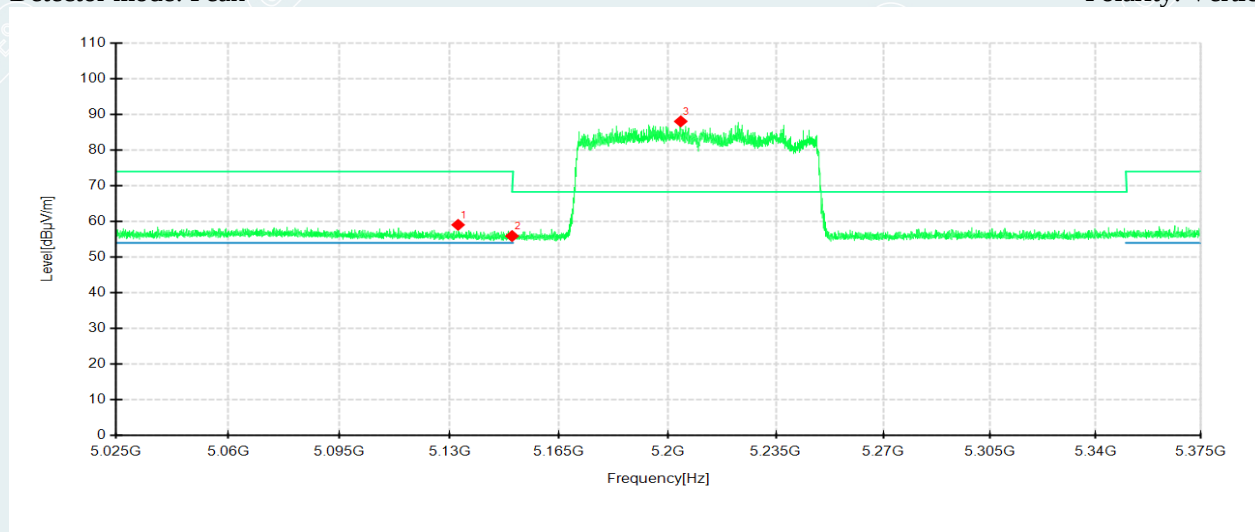


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5056.85	41.98	58.67	16.69	74.00	15.33	200	333	Horizontal	/
2	5150	39.77	56.05	16.28	68.30	12.25	100	103	Horizontal	/
3	5202.205	71.62	88.12	16.50	-	-	100	81	Horizontal	No limit
1	5132.765	42.81	59.06	16.25	74.00	14.94	100	3	Vertical	/
2	5150	39.84	55.92	16.08	68.30	12.38	100	58	Vertical	/
3	5204.2	71.86	88.04	16.18	-	-	200	198	Vertical	No limit

802.11ax HE80 mode/5210MHz


Detector mode: Average

Polarity: Horizontal

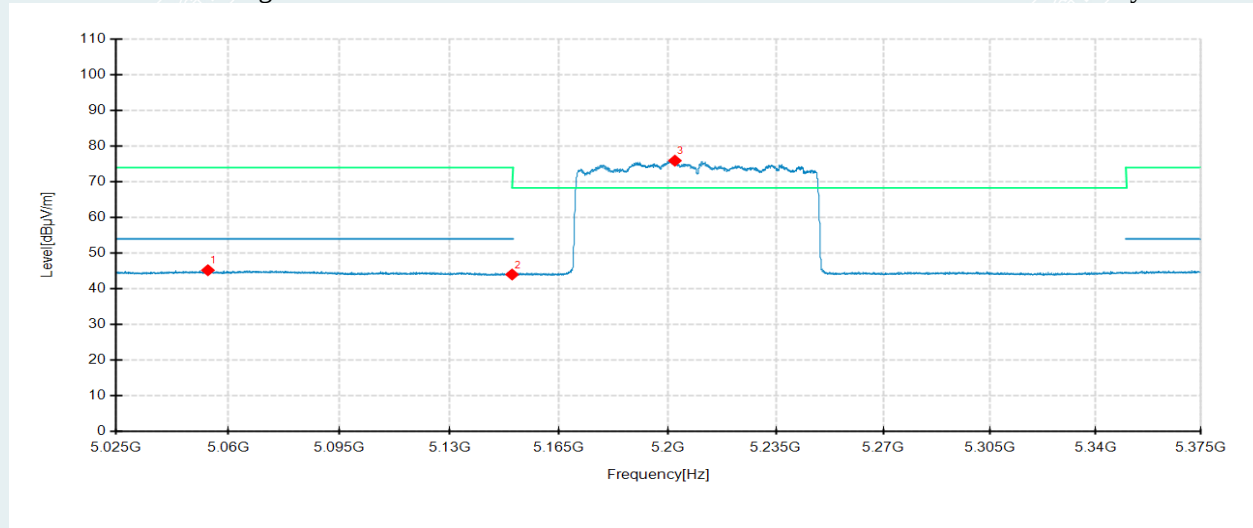

Detector mode: Average

Polarity: Vertical

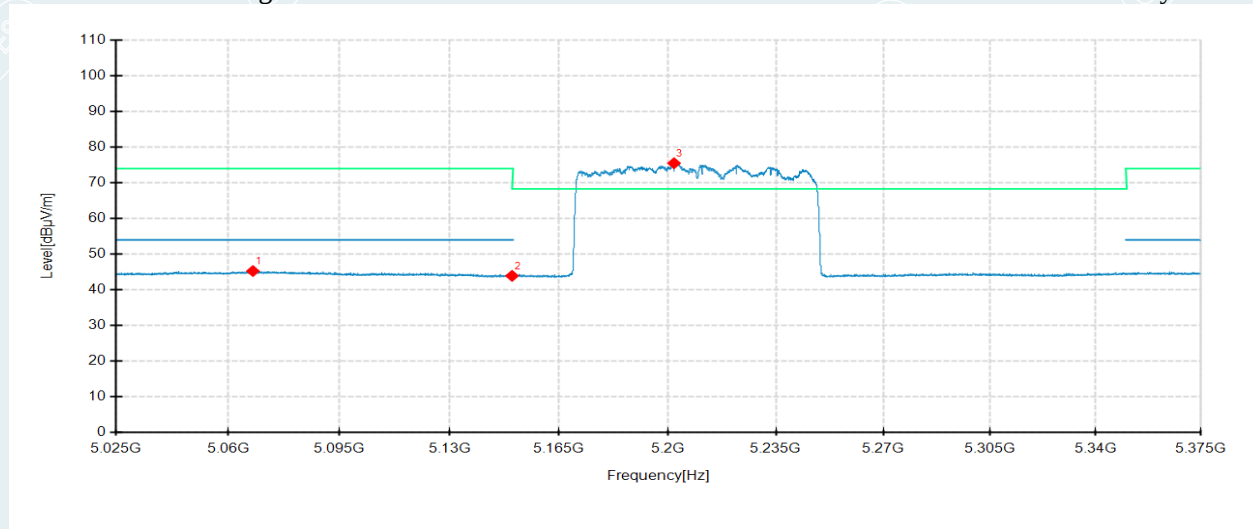


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5053.665	28.51	45.22	16.71	54.00	8.78	100	255	Horizontal	/
2	5150	27.74	44.02	16.28	54.00	9.98	200	80	Horizontal	/
3	5202.31	59.41	75.91	16.50	-	-	100	71	Horizontal	No limit
1	5067.805	28.54	45.28	16.74	54.00	8.72	100	252	Vertical	/
2	5150	27.85	43.93	16.08	54.00	10.07	100	73	Vertical	/
3	5202.03	59.29	75.48	16.19	-	-	200	199	Vertical	No limit

802.11ax HE80 mode/5290MHz


Detector mode: Peak

Polarity: Horizontal

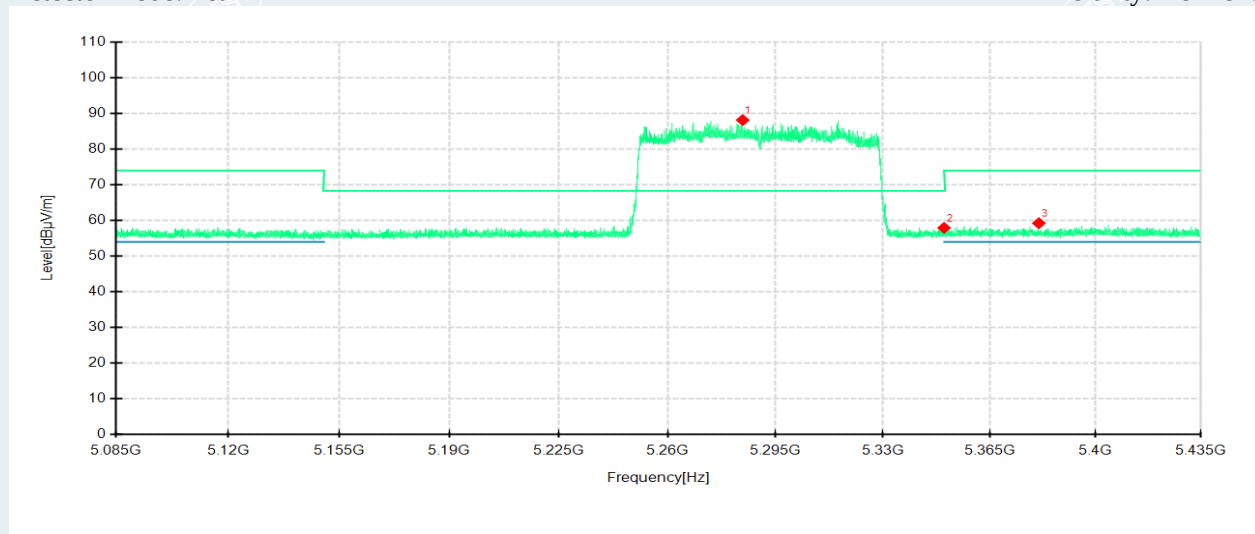

Detector mode: Peak

Polarity: Vertical

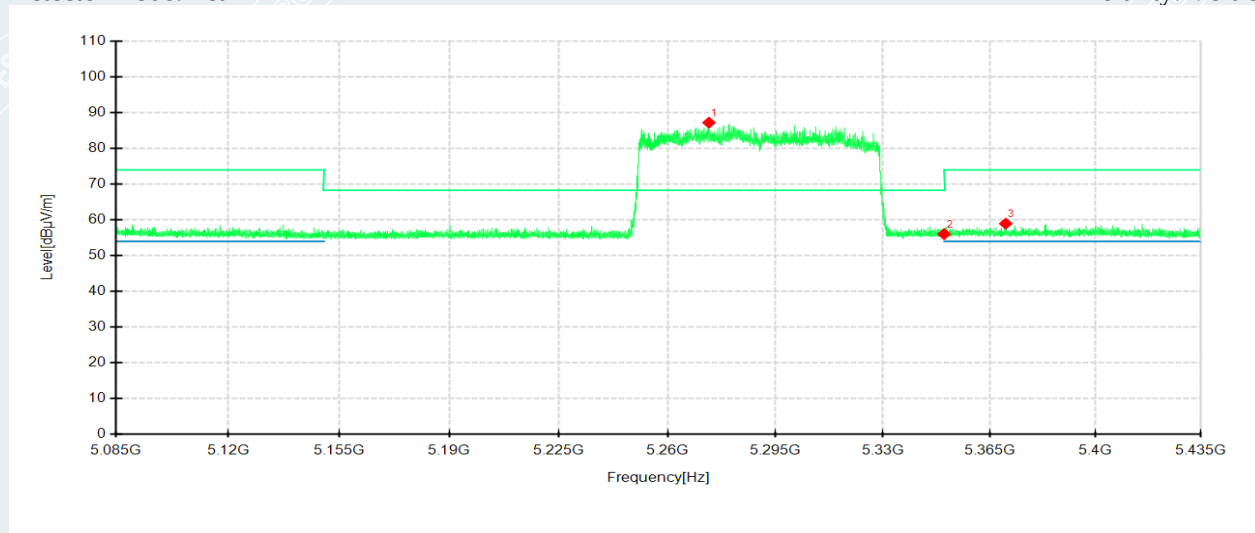


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5284.29	71.73	88.12	16.39	-	-	200	65	Horizontal	No limit
2	5350	41.39	57.93	16.54	68.30	10.37	100	298	Horizontal	/
3	5381.205	42.39	59.24	16.85	74.00	14.76	200	290	Horizontal	/
1	5273.37	71.05	87.19	16.14	-	-	200	174	Vertical	No limit
2	5350	39.50	56.04	16.54	68.30	12.26	100	261	Vertical	/
3	5370.285	42.29	58.95	16.66	74.00	15.05	200	218	Vertical	/

802.11ax HE80 mode/5290MHz


Detector mode: Average

Polarity: Horizontal

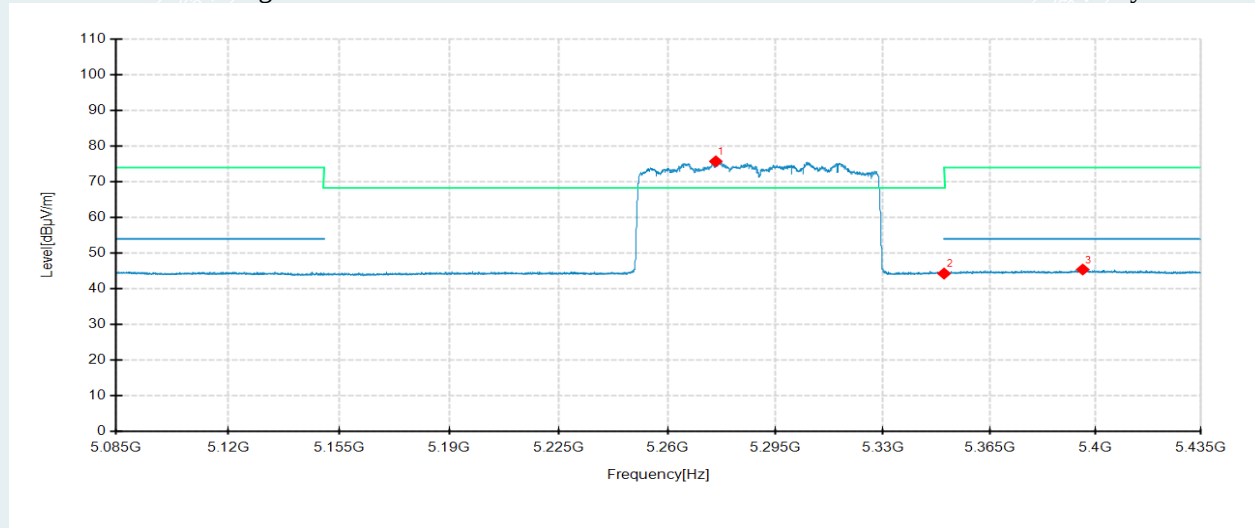

Detector mode: Average


Polarity: Vertical

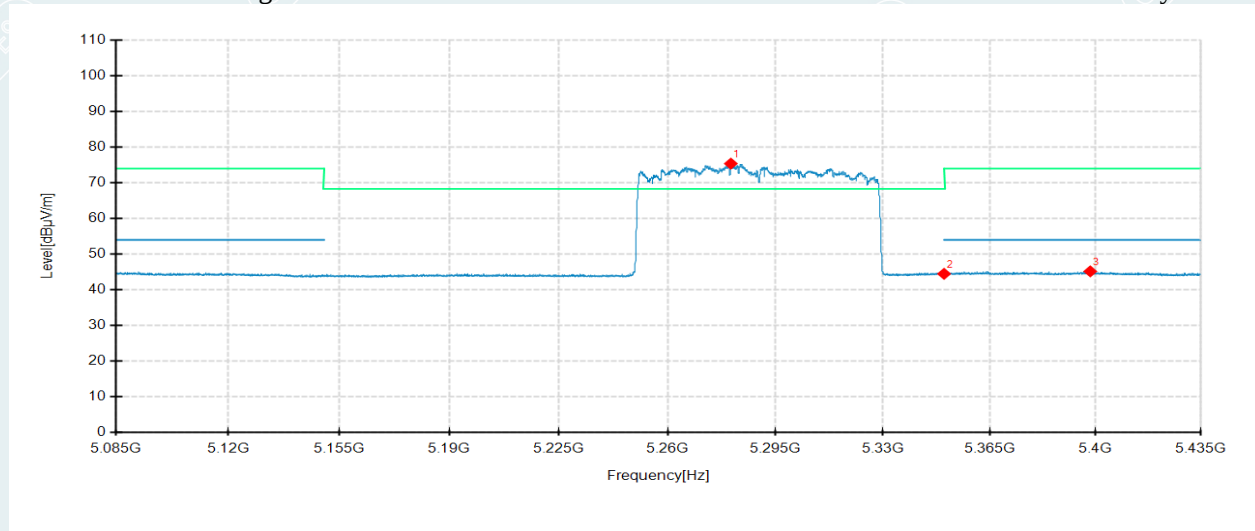

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5275.575	59.34	75.73	16.39	-	-	200	47	Horizontal	No limit
2	5350	27.75	44.29	16.54	54.00	9.71	200	119	Horizontal	/
3	5395.73	28.42	45.42	17.00	54.00	8.58	100	334	Horizontal	/
1	5280.44	59.20	75.37	16.17	-	-	200	190	Vertical	No limit
2	5350	27.95	44.49	16.54	54.00	9.51	100	345	Vertical	/
3	5398.215	28.35	45.18	16.83	54.00	8.82	100	345	Vertical	/


802.11ax HE80 mode/5530MHz
Detector mode: Peak

Polarity: Horizontal

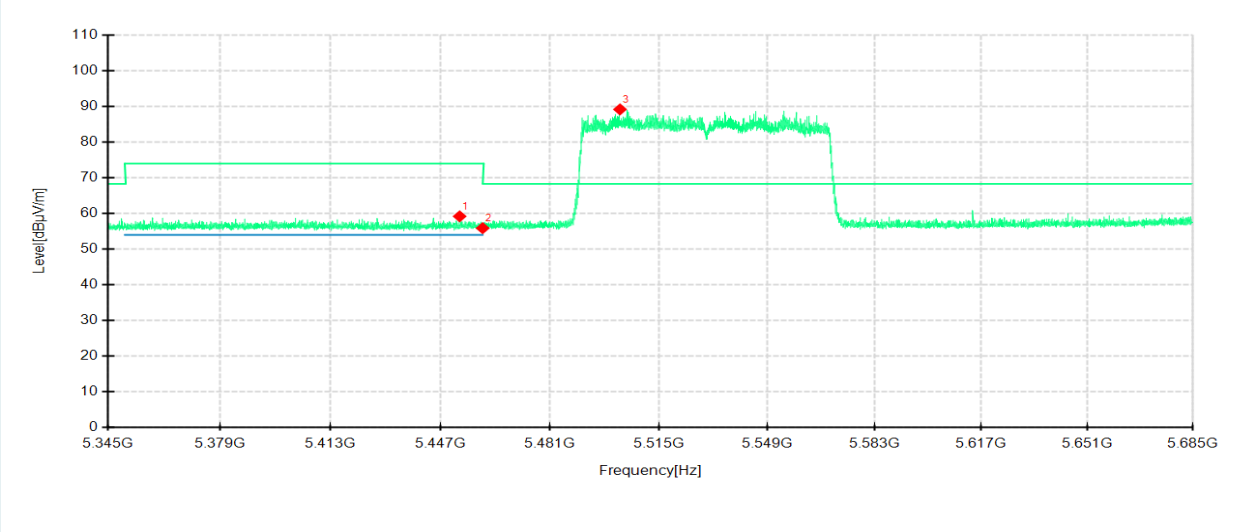

Detector mode: Peak

Polarity: Vertical

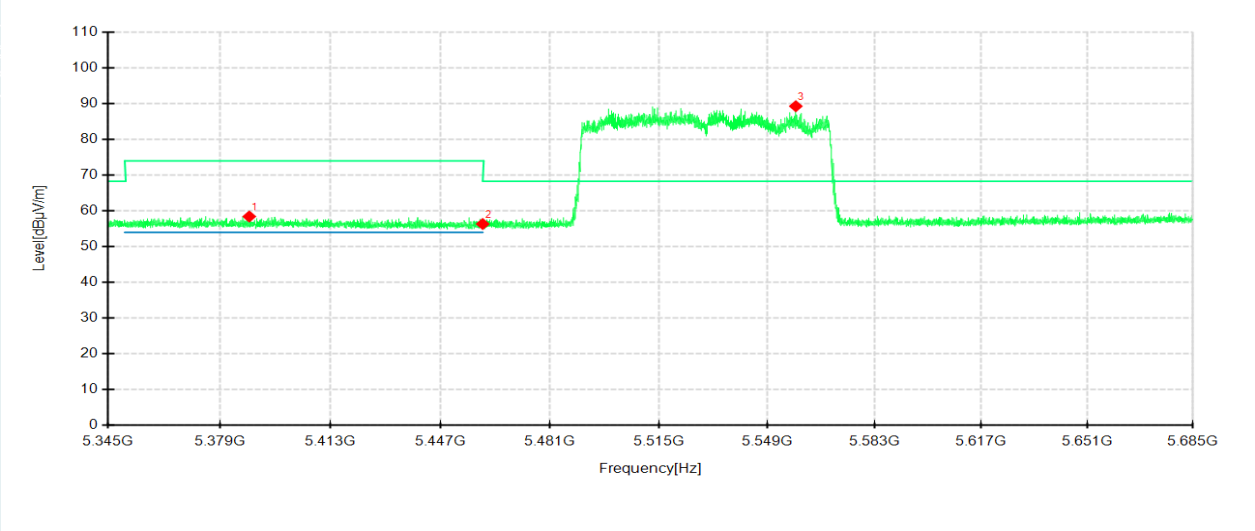


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5452.848	42.29	59.20	16.91	74.00	14.80	100	331	Horizontal	/
2	5460	38.92	55.89	16.97	68.30	12.41	200	279	Horizontal	/
3	5502.794	71.85	89.16	17.31	-	-	200	52	Horizontal	No limit
1	5388.01	41.66	58.42	16.76	74.00	15.58	100	125	Vertical	/
2	5460	39.78	56.33	16.55	68.30	11.97	100	0	Vertical	/
3	5558.078	72.58	89.26	16.68	-	-	200	193	Vertical	No limit

802.11ax HE80 mode/5530MHz


Detector mode: Average

Polarity: Horizontal

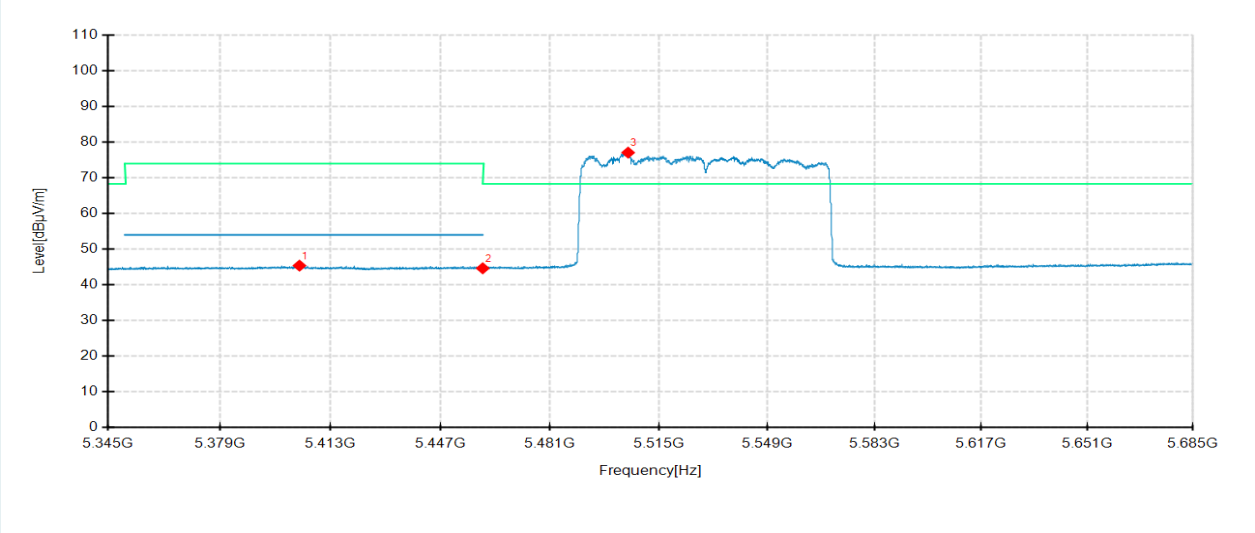

Detector mode: Average


Polarity: Vertical

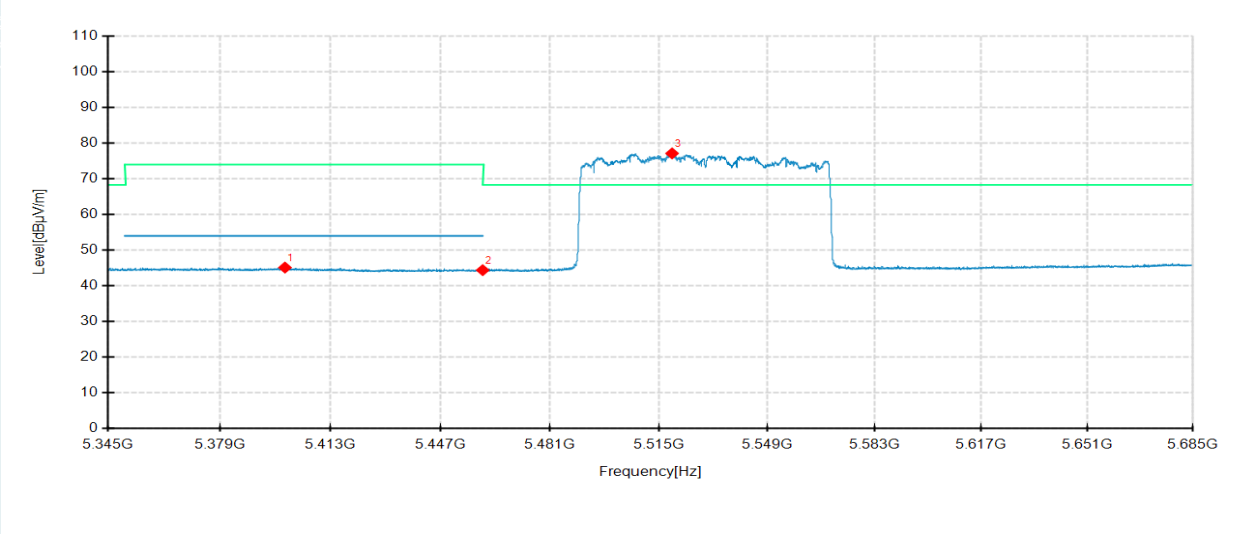

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5403.412	28.36	45.39	17.03	54.00	8.61	100	159	Horizontal	/
2	5460	27.67	44.64	16.97	54.00	9.36	100	139	Horizontal	/
3	5505.344	59.77	77.05	17.28	-	-	200	50	Horizontal	No limit
1	5398.958	28.30	45.13	16.83	54.00	8.87	100	19	Vertical	/
2	5460	27.85	44.40	16.55	54.00	9.60	200	194	Vertical	/
3	5519.114	60.38	77.11	16.73	-	-	200	184	Vertical	No limit


802.11ax HE80 mode/5610MHz
Detector mode: Peak

Polarity: Horizontal

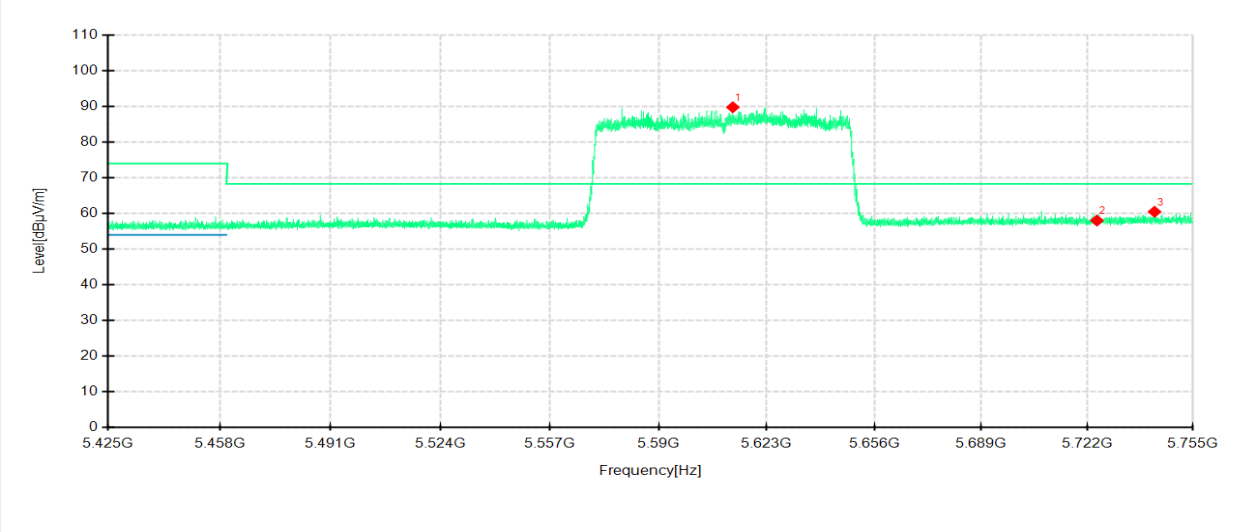

Detector mode: Peak

Polarity: Vertical

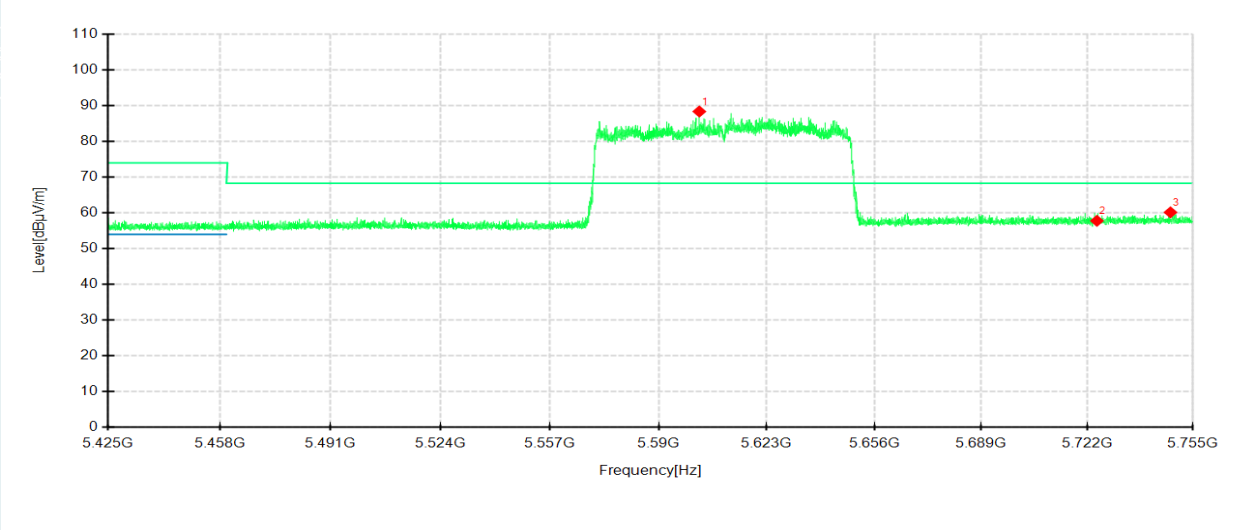


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5612.638	72.53	89.76	17.23	-	-	200	278	Horizontal	No limit
2	5725	39.87	58.03	18.16	68.30	10.27	100	203	Horizontal	/
3	5742.988	42.21	60.49	18.28	68.30	7.81	200	201	Horizontal	/
1	5602.408	71.20	88.34	17.14	-	-	200	144	Vertical	No limit
2	5725	39.77	57.78	18.01	68.30	10.52	200	155	Vertical	/
3	5747.971	42.02	60.14	18.12	68.30	8.16	200	67	Vertical	/

802.11ax HE80 mode/5610MHz


Detector mode: Average

Polarity: Horizontal

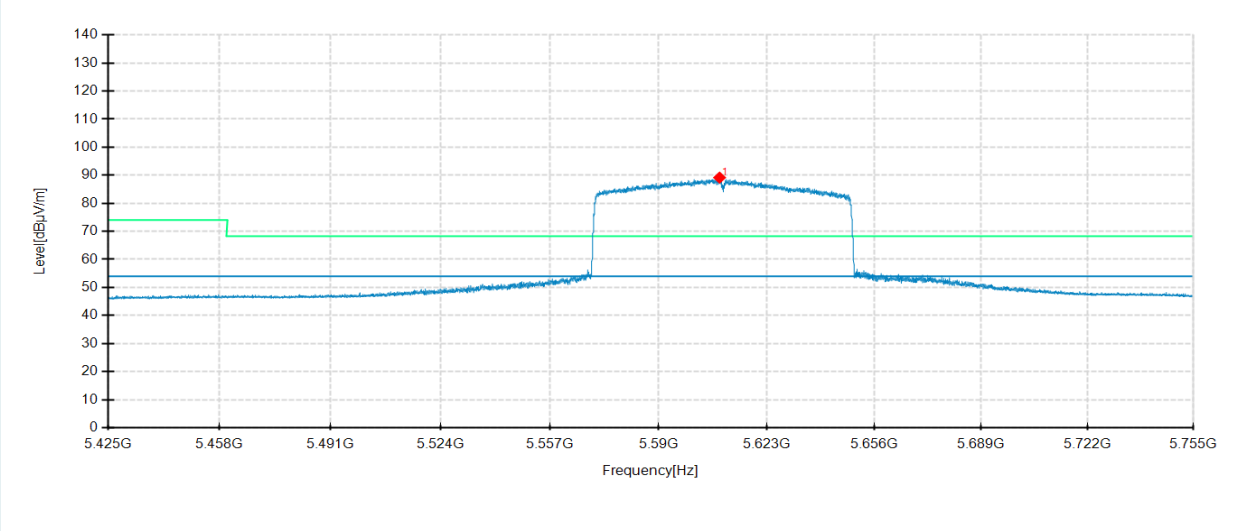

Detector mode: Average

Polarity: Vertical

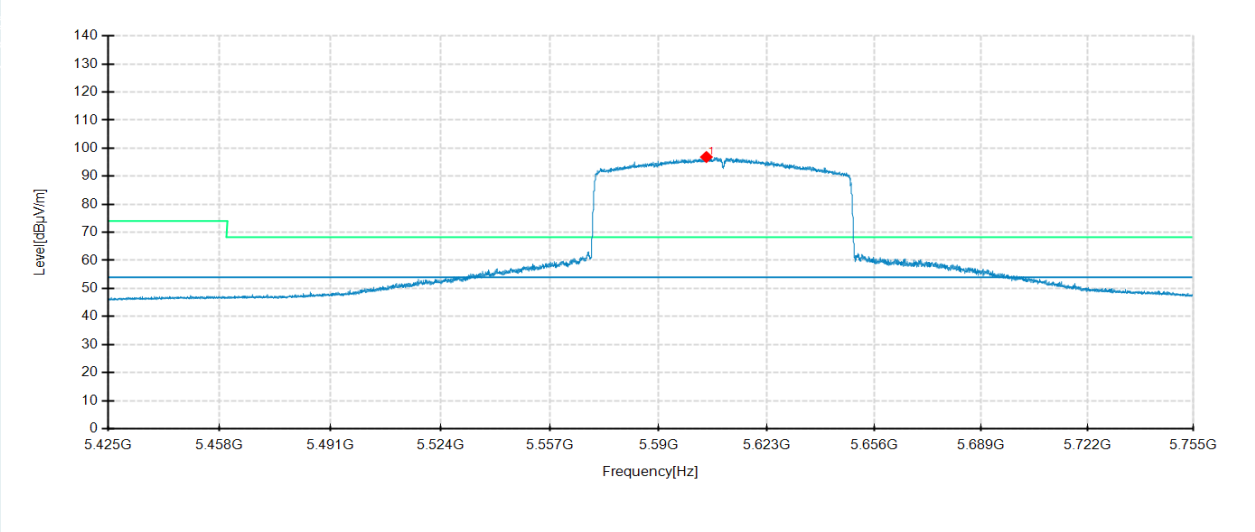

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5608.579	69.86	89.16	19.30	54.00	-35.16	200	139	Horizontal	No limit
1	5604.553	77.22	96.85	19.63	54.00	-42.85	200	145	Vertical	No limit

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

Antenna 1

802.11a mode/5745MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

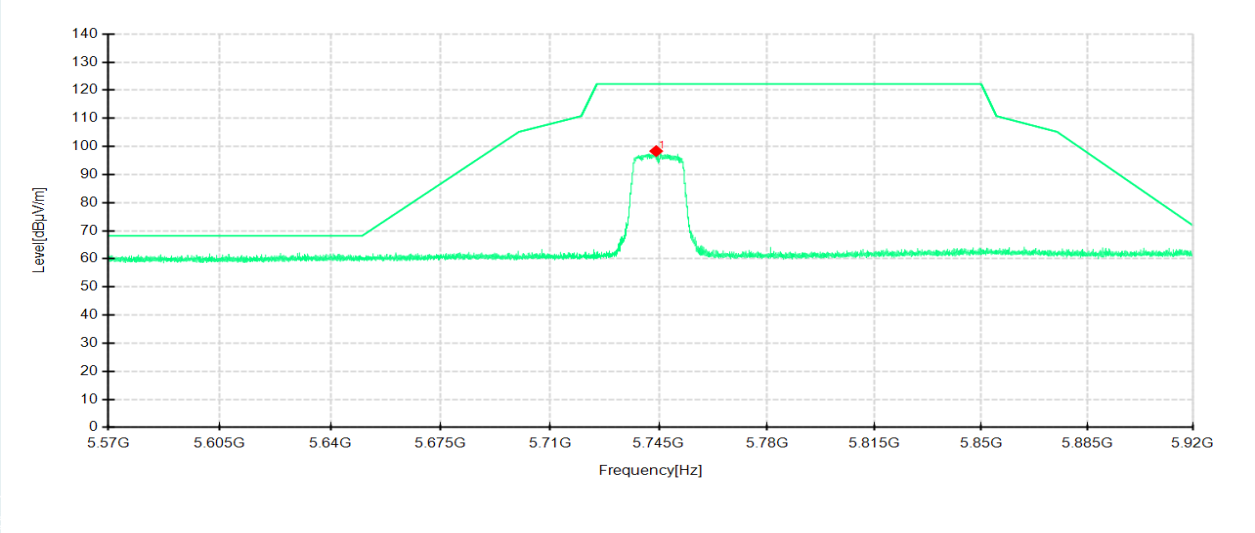

Detector mode: Peak

Polarity: Vertical

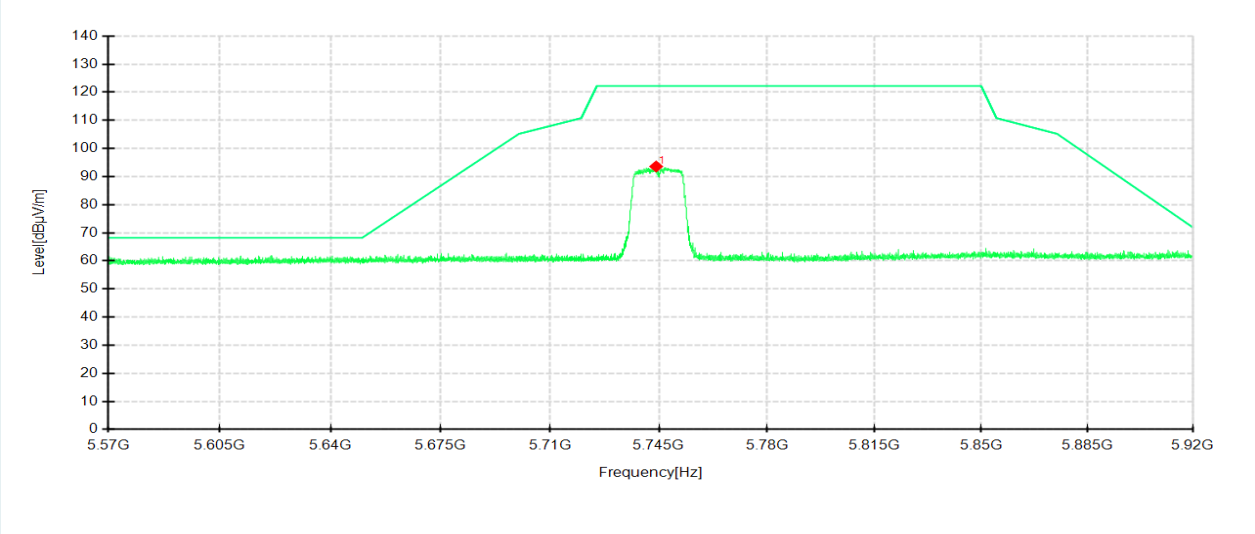

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5744.125	77.05	98.34	21.29	122.20	23.86	200	280	Horizontal
1	5744.125	72.49	93.59	21.10	122.20	28.61	100	2	Vertical

802.11a mode/5825MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

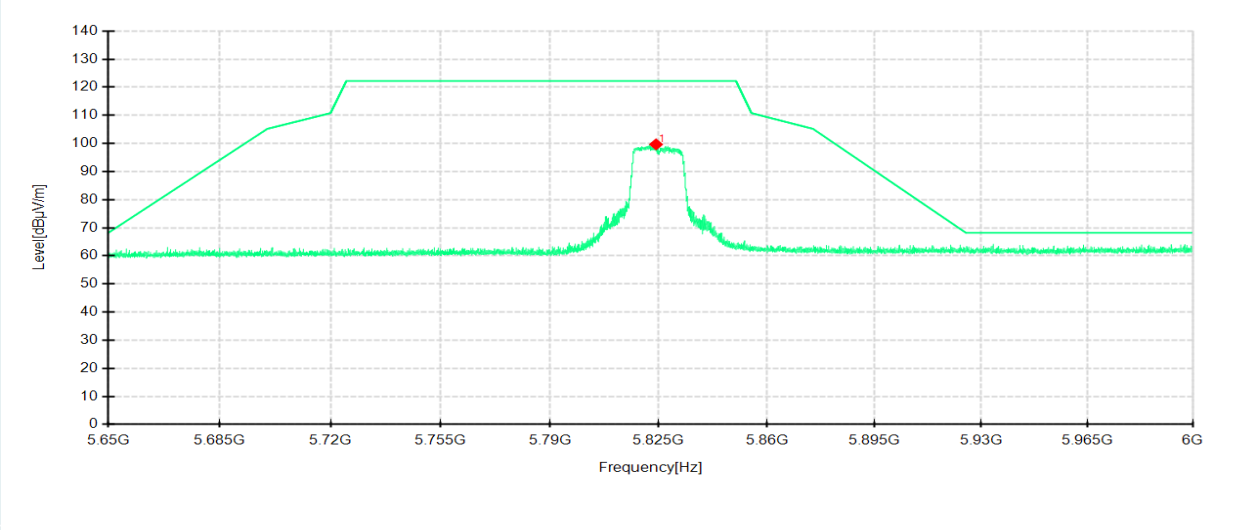

Detector mode: Peak

Polarity: Vertical

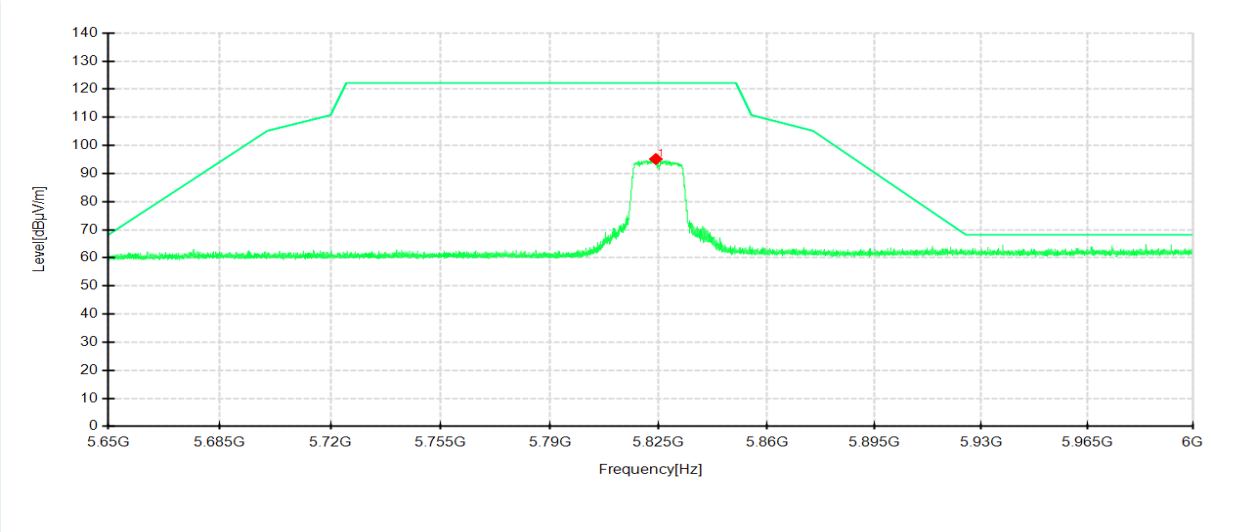

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5824.125	77.52	99.67	22.15	122.20	22.53	200	281	Horizontal
1	5824.055	73.38	95.17	21.79	122.20	27.03	100	0	Vertical

Antenna 2

802.11a mode/5745MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

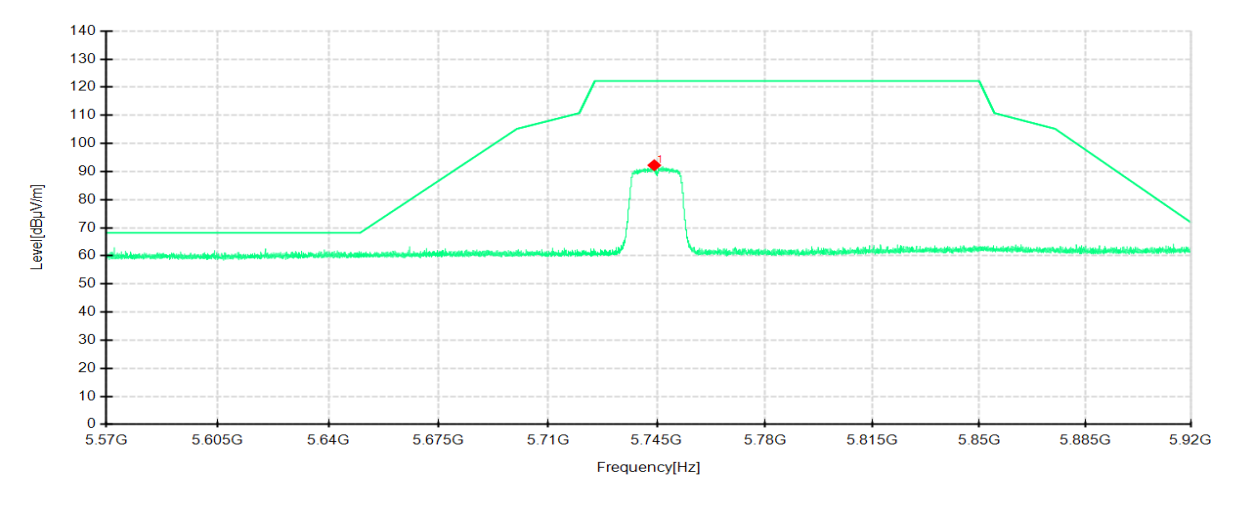

Detector mode: Peak

Polarity: Vertical

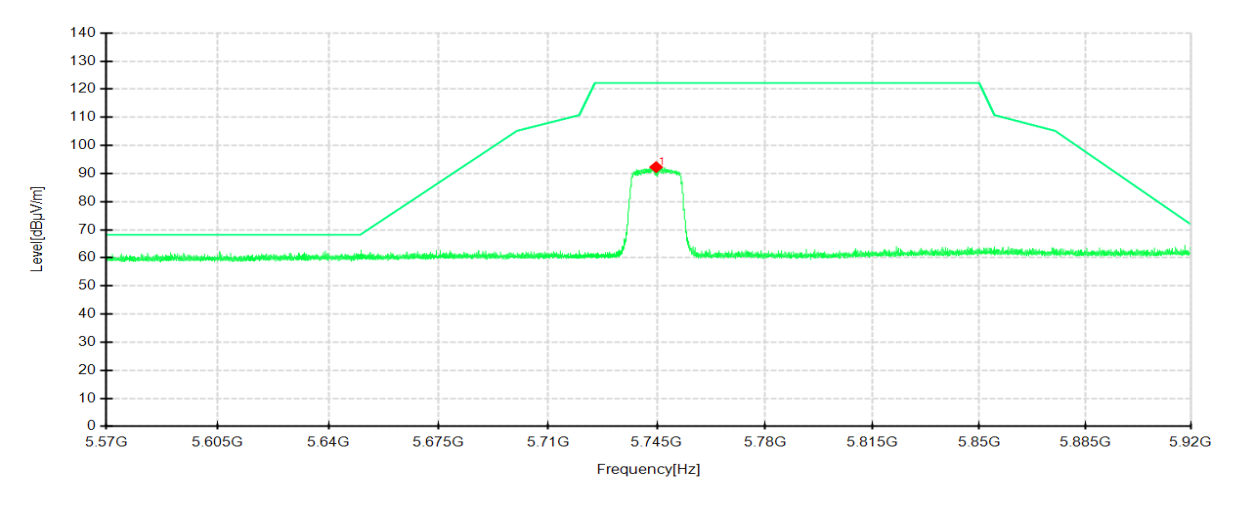

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5744.16	70.96	92.25	21.29	122.20	29.95	200	319	Horizontal
1	5744.755	71.17	92.28	21.11	122.20	29.92	200	315	Vertical

802.11a mode/5825MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

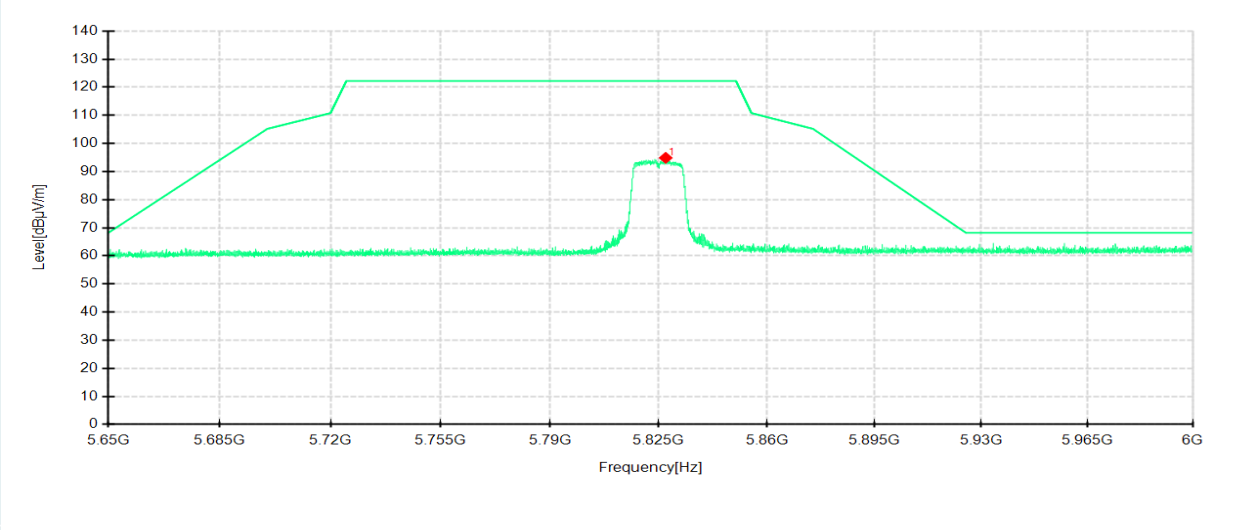

Detector mode: Peak

Polarity: Vertical

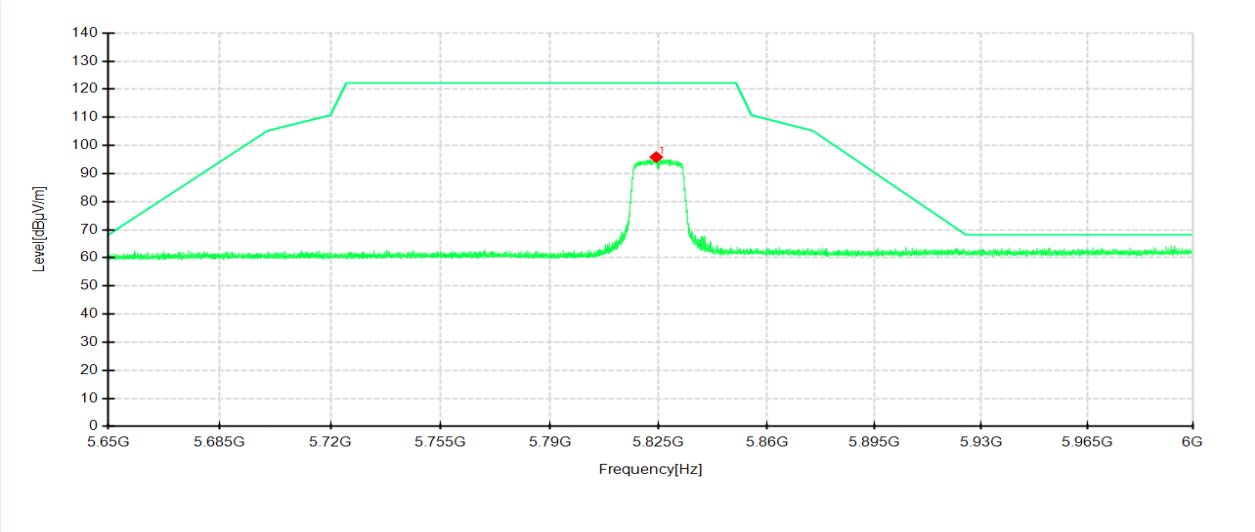

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5827.24	72.65	94.87	22.22	122.20	27.33	100	70	Horizontal
1	5824.195	74.05	95.85	21.80	122.20	26.35	200	183	Vertical

802.11n HT20 mode/5745MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

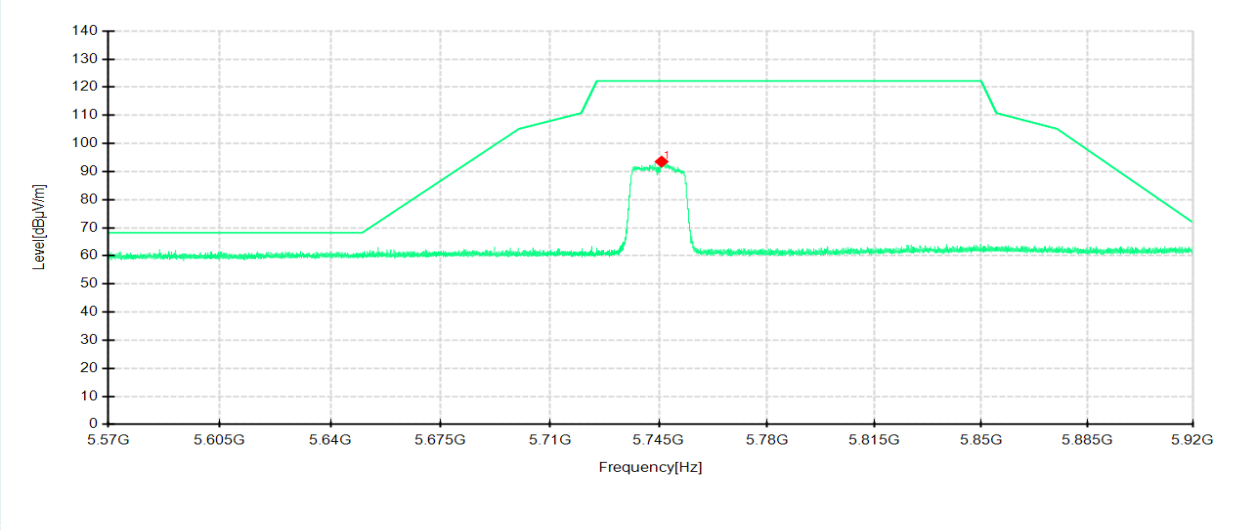

Detector mode: Peak

Polarity: Vertical

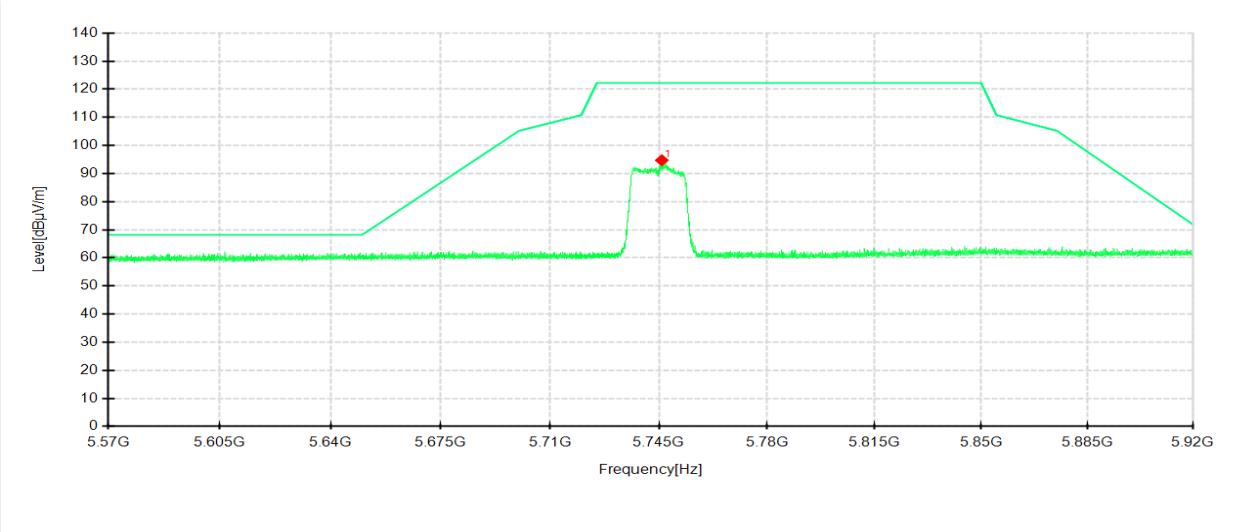

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5745.875	72.25	93.55	21.30	122.20	28.65	200	140	Horizontal
1	5745.945	73.63	94.74	21.11	122.20	27.46	200	147	Vertical

802.11n HT20 mode/5825MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

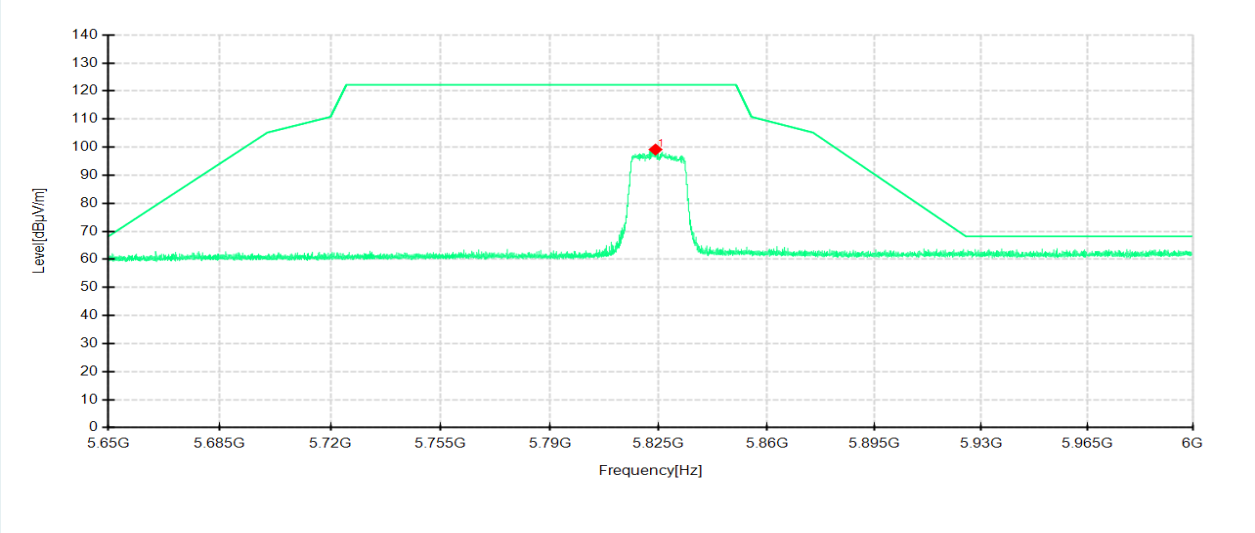

Detector mode: Peak

Polarity: Vertical

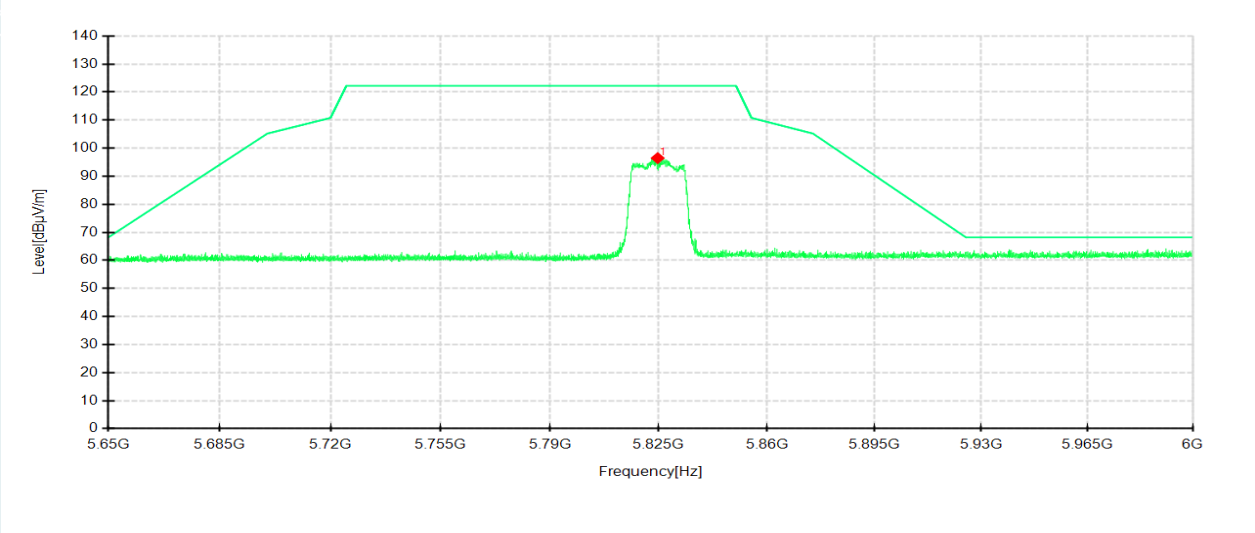

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5823.95	77.01	99.15	22.14	122.20	23.05	200	321	Horizontal
1	5824.65	74.65	96.46	21.81	122.20	25.74	200	152	Vertical

802.11ac VHT20 mode/5745MHz

Environment: 24.6°C/52%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-06-07

Polarity: Horizontal

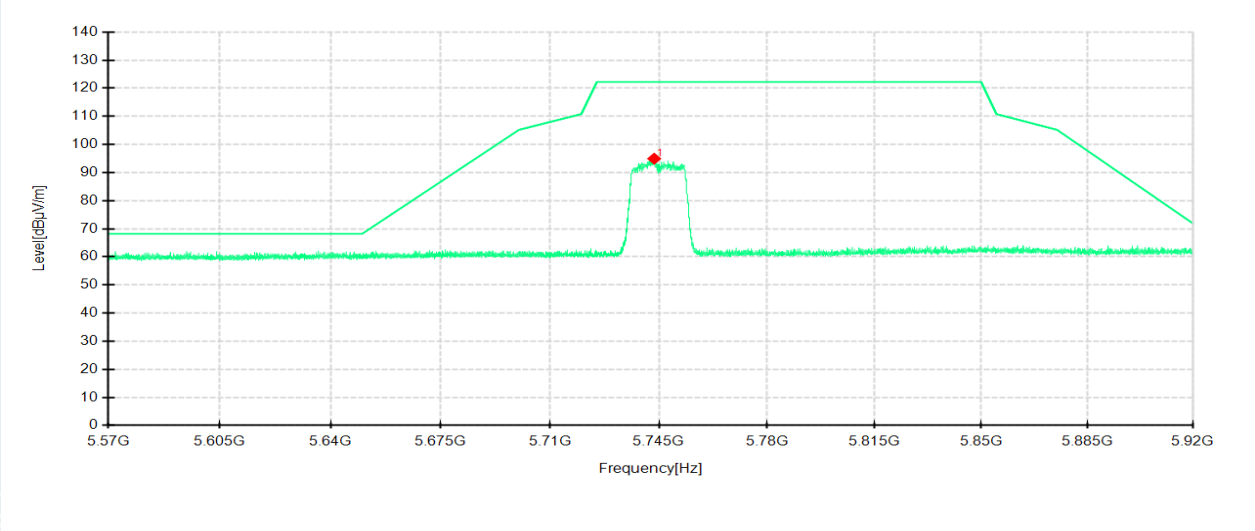

Detector mode: Peak

Polarity: Vertical

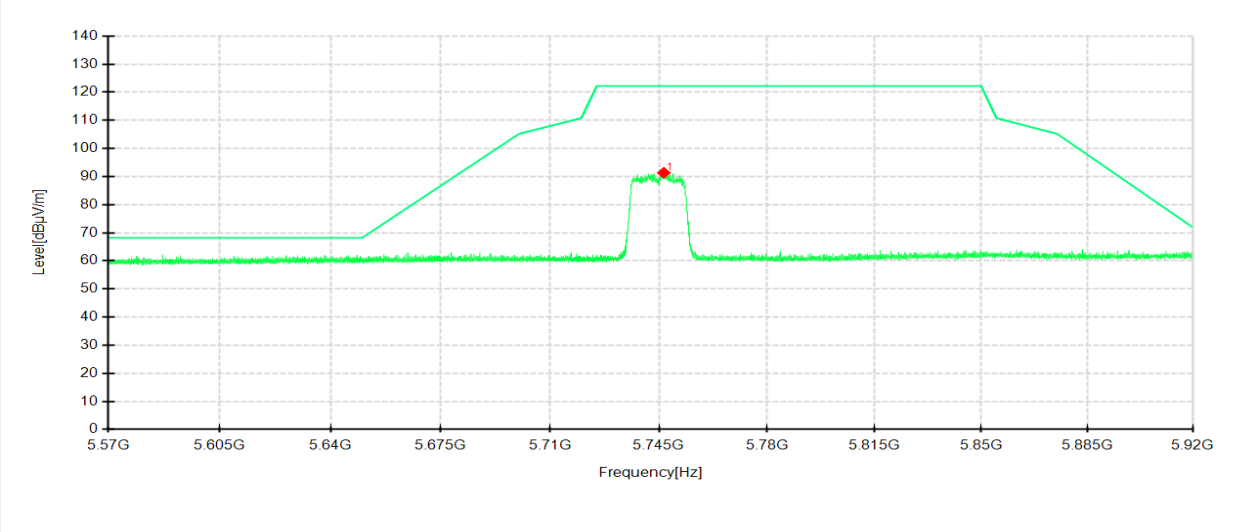

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5743.495	73.66	94.94	21.28	122.20	27.26	200	143	Horizontal
1	5746.61	70.22	91.33	21.11	122.20	30.87	200	323	Vertical

802.11ac VHT20 mode/5825MHz

Environment: 24.6°C/52%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-06-07

Polarity: Horizontal

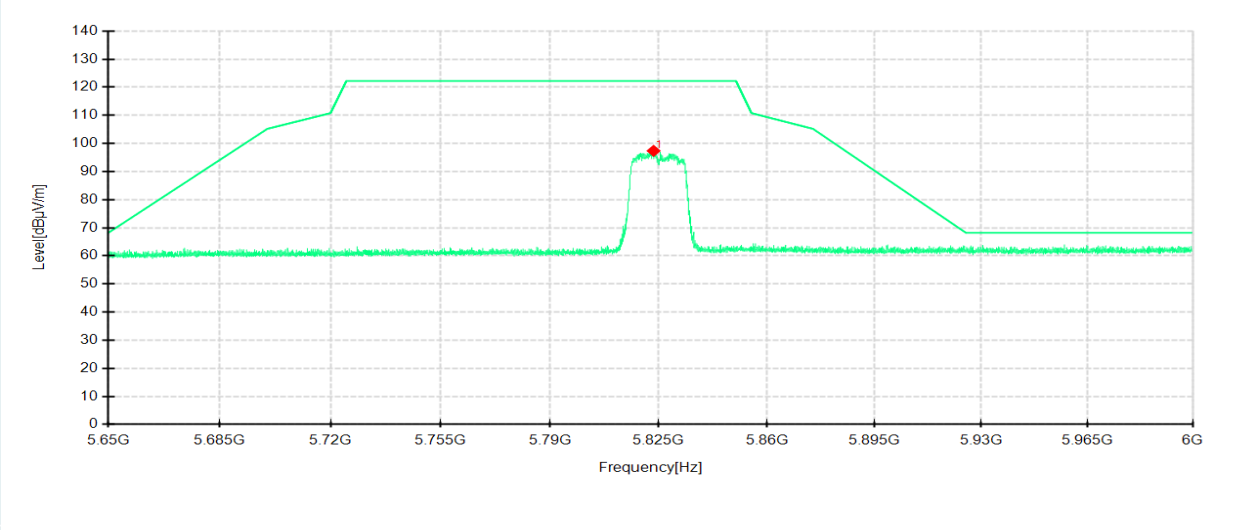

Detector mode: Peak

Polarity: Vertical

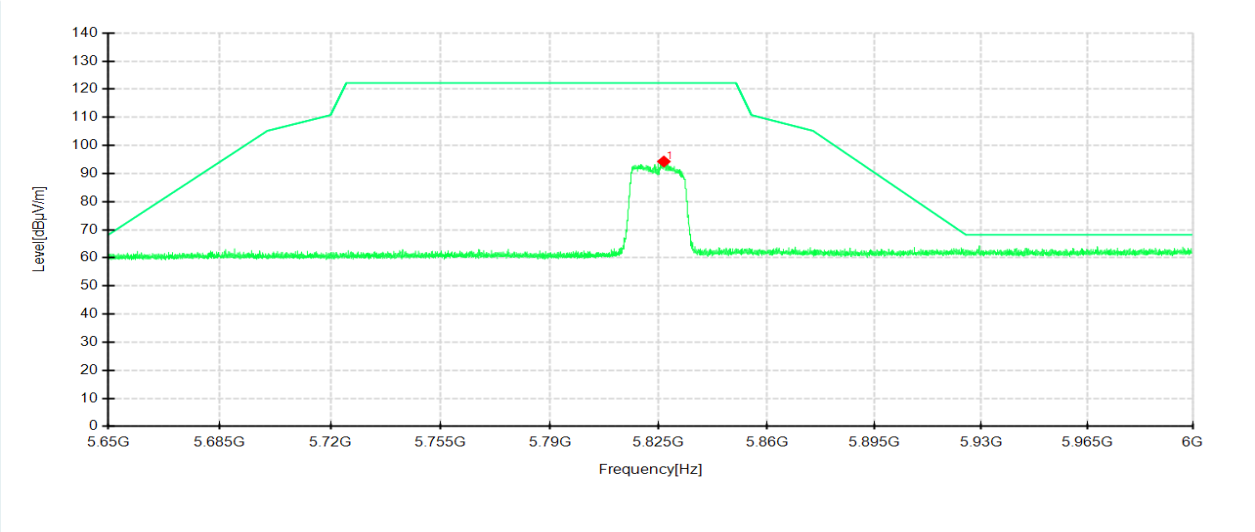

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5823.32	75.24	97.37	22.13	122.20	24.83	200	35	Horizontal
1	5826.645	72.42	94.28	21.86	122.20	27.92	200	323	Vertical

802.11ax HE20 mode/5745MHz

Environment: 24.6°C/52%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-06-07

Polarity: Horizontal

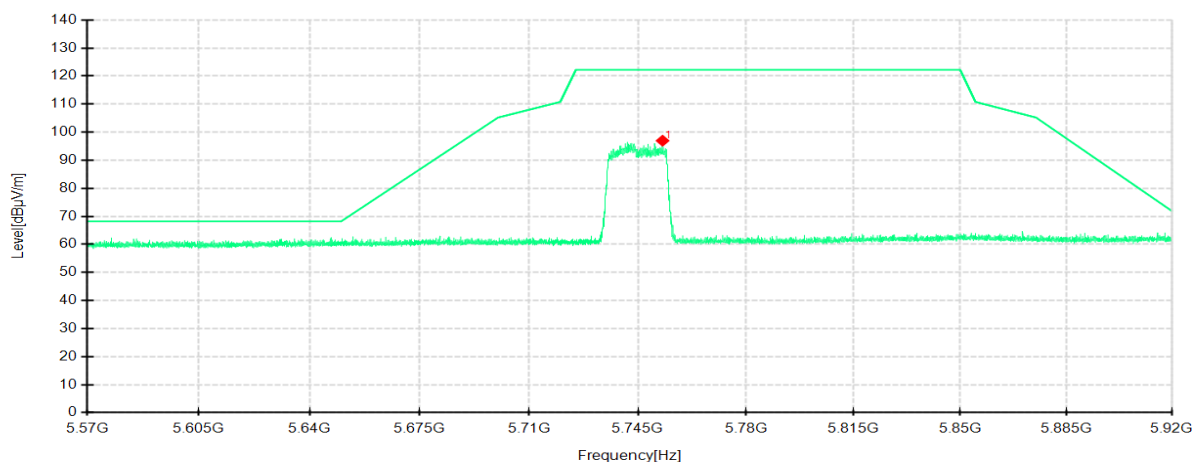

Detector mode: Peak

Polarity: Vertical

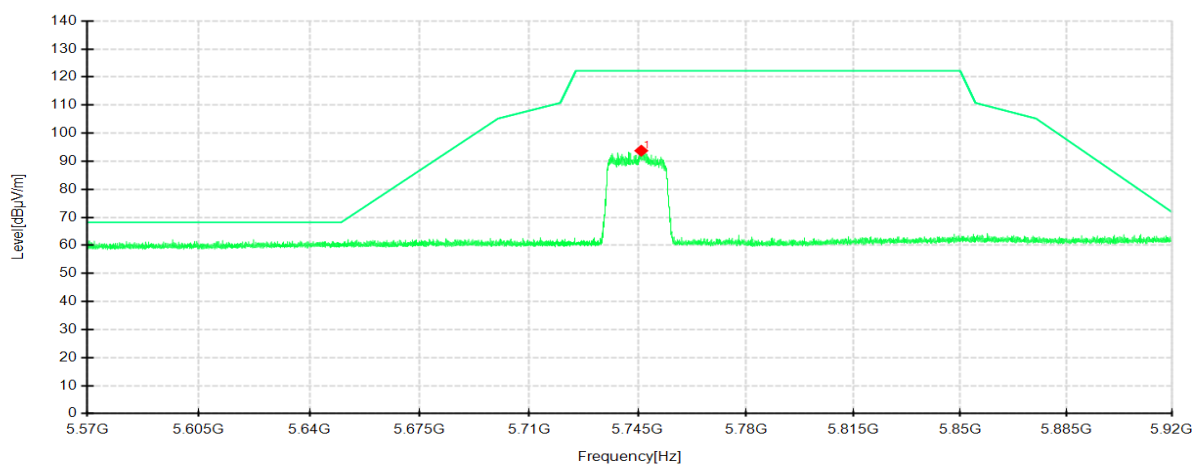

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5752.98	75.63	96.97	21.34	122.20	25.23	200	142	Horizontal
1	5746.085	72.64	93.75	21.11	122.20	28.45	200	324	Vertical

802.11ax HE20 mode/5825MHz

Environment: 24.6°C/52%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-06-07

Polarity: Horizontal

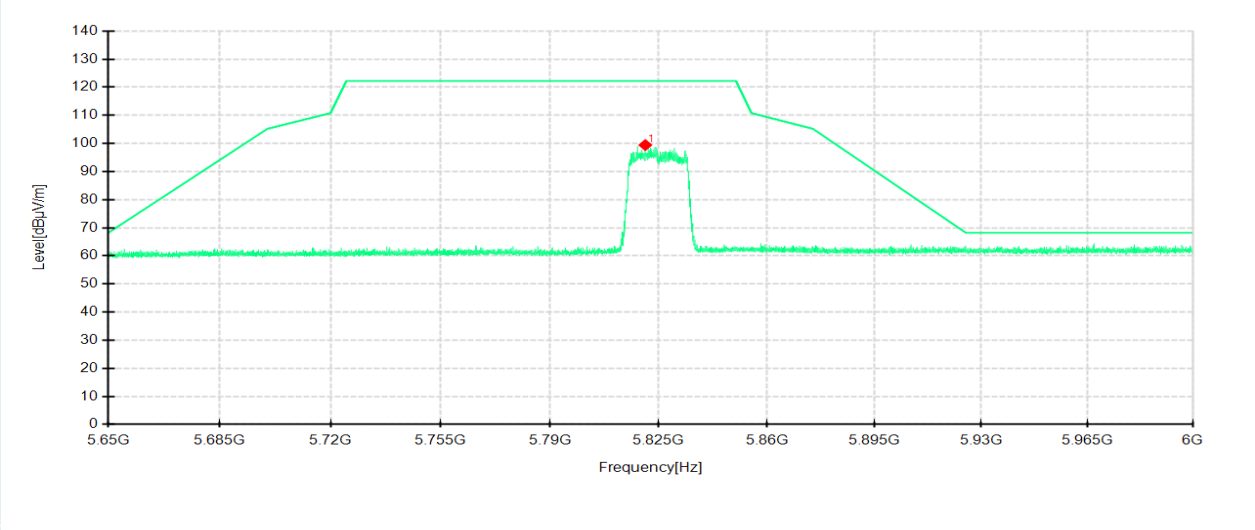

Detector mode: Peak

Polarity: Vertical

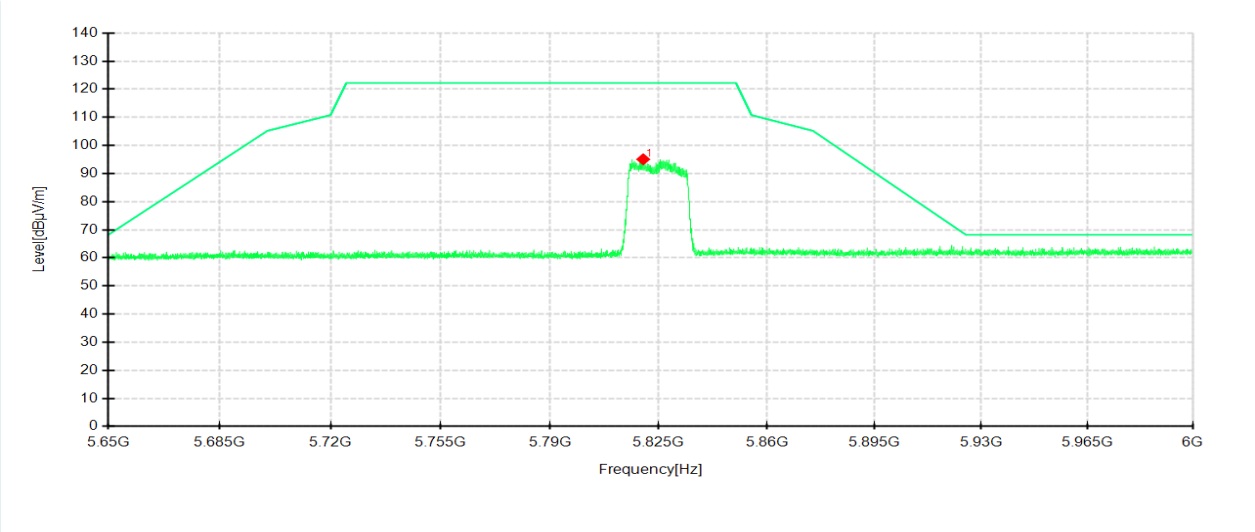

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5820.66	77.37	99.43	22.06	122.20	22.77	200	25	Horizontal
1	5819.995	73.40	95.08	21.68	122.20	27.12	100	16	Vertical

802.11n HT40 mode/5755MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

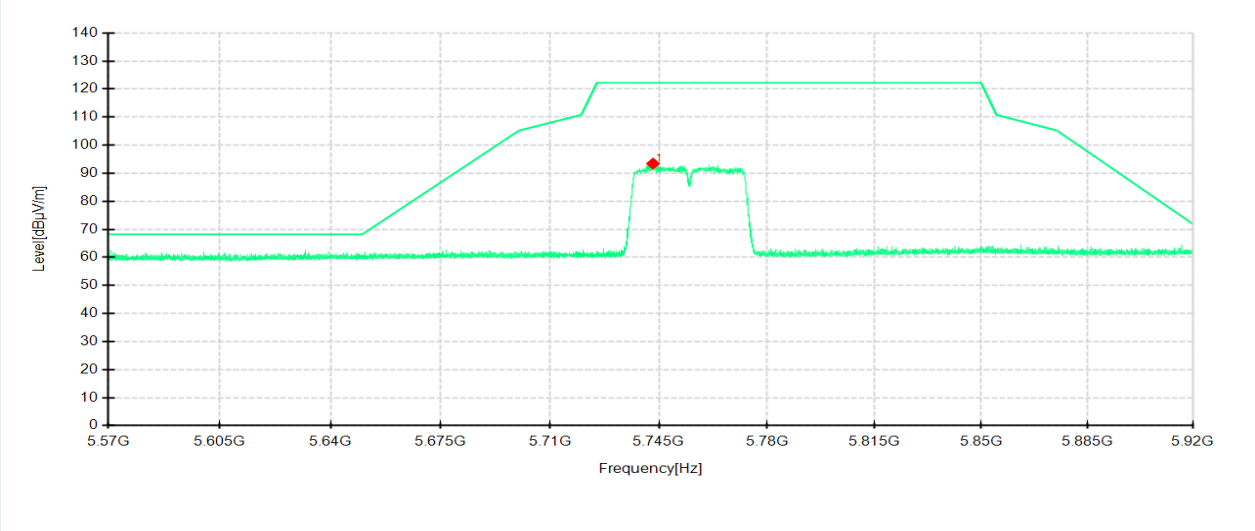

Detector mode: Peak

Polarity: Vertical

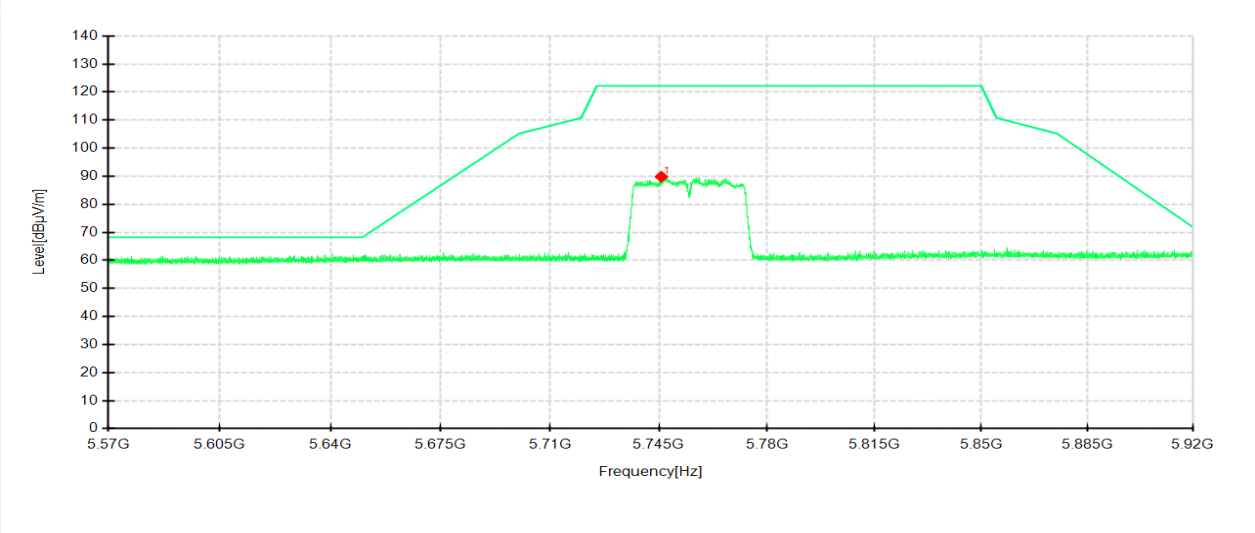

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5747.24	71.42	92.73	21.31	122.20	29.47	200	271	Horizontal
1	5745.805	68.71	89.82	21.11	122.20	32.38	200	140	Vertical

802.11n HT40 mode/5795MHz

Environment: 22.6°C/65%RH/101.0kPa


Test Engineer: Chen Xiacong

Detector mode: Peak

Voltage: DC 12V


Data: 2023-05-30

Polarity: Horizontal

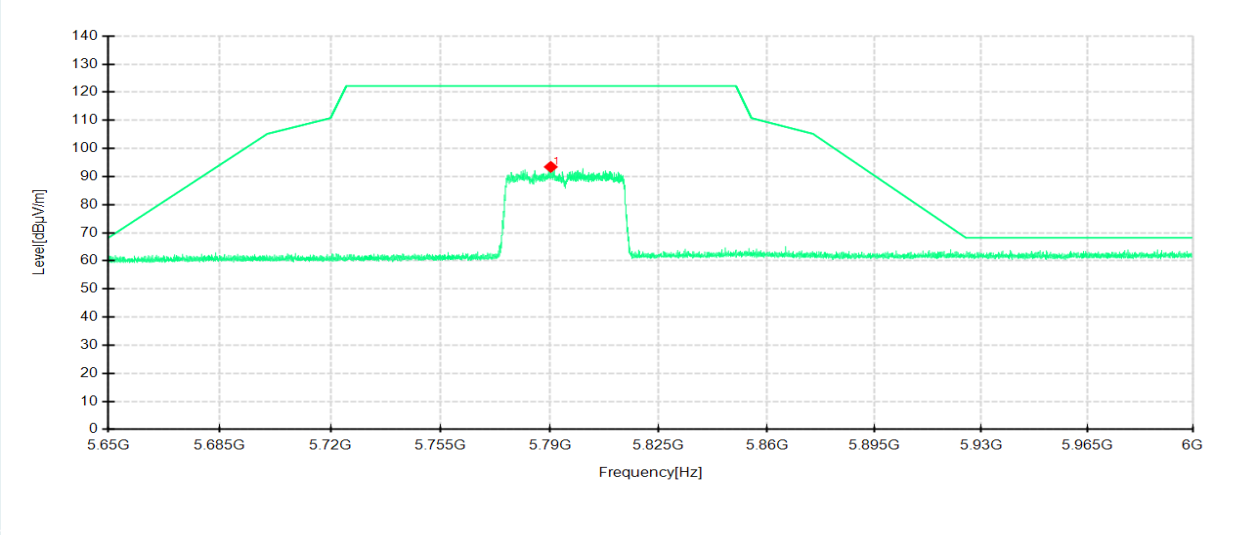

Detector mode: Peak

Polarity: Vertical

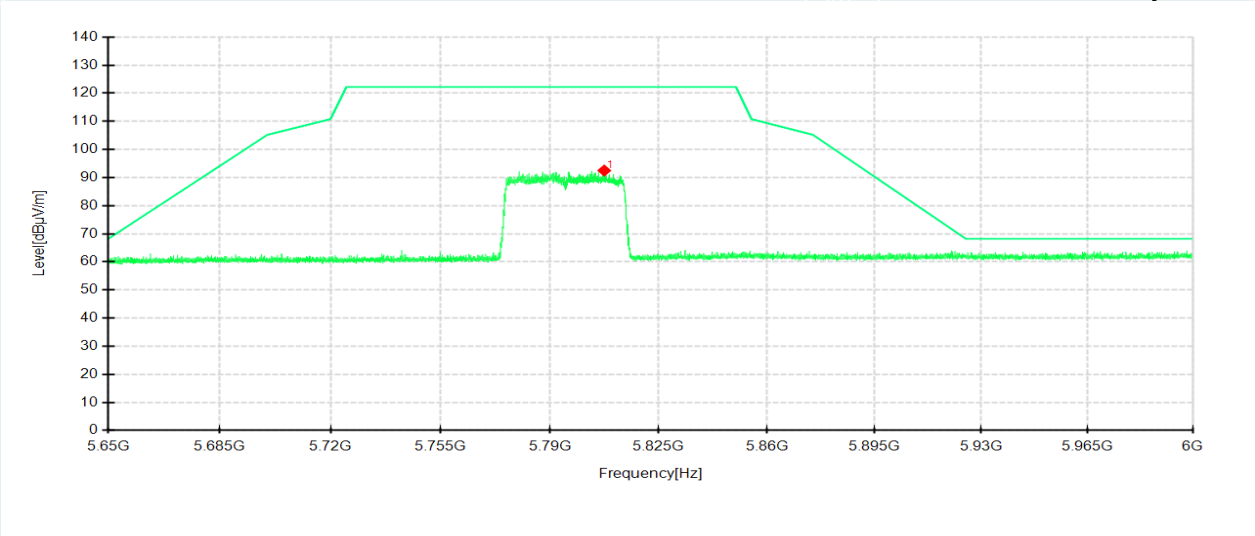

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	5790.245	71.93	93.44	21.51	122.20	28.76	100	0	Horizontal
1	5807.43	71.15	92.50	21.35	122.20	29.70	200	137	Vertical