



Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

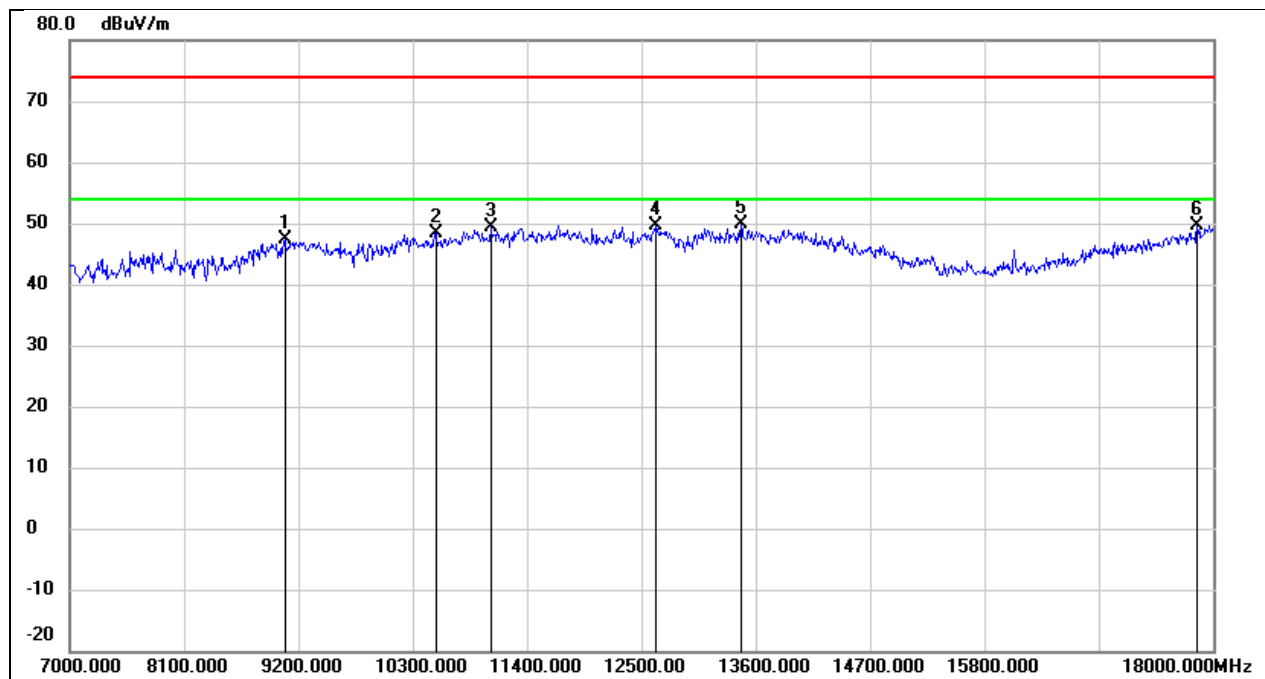


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	36.97	10.39	47.36	74.00	-26.64	peak
2	10520.000	35.48	12.90	48.38	74.00	-25.62	peak
3	11048.000	34.54	14.91	49.45	74.00	-24.55	peak
4	12632.000	31.69	17.99	49.68	74.00	-24.32	peak
5	13457.000	29.36	20.46	49.82	74.00	-24.18	peak
6	17846.000	24.56	25.08	49.64	74.00	-24.36	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

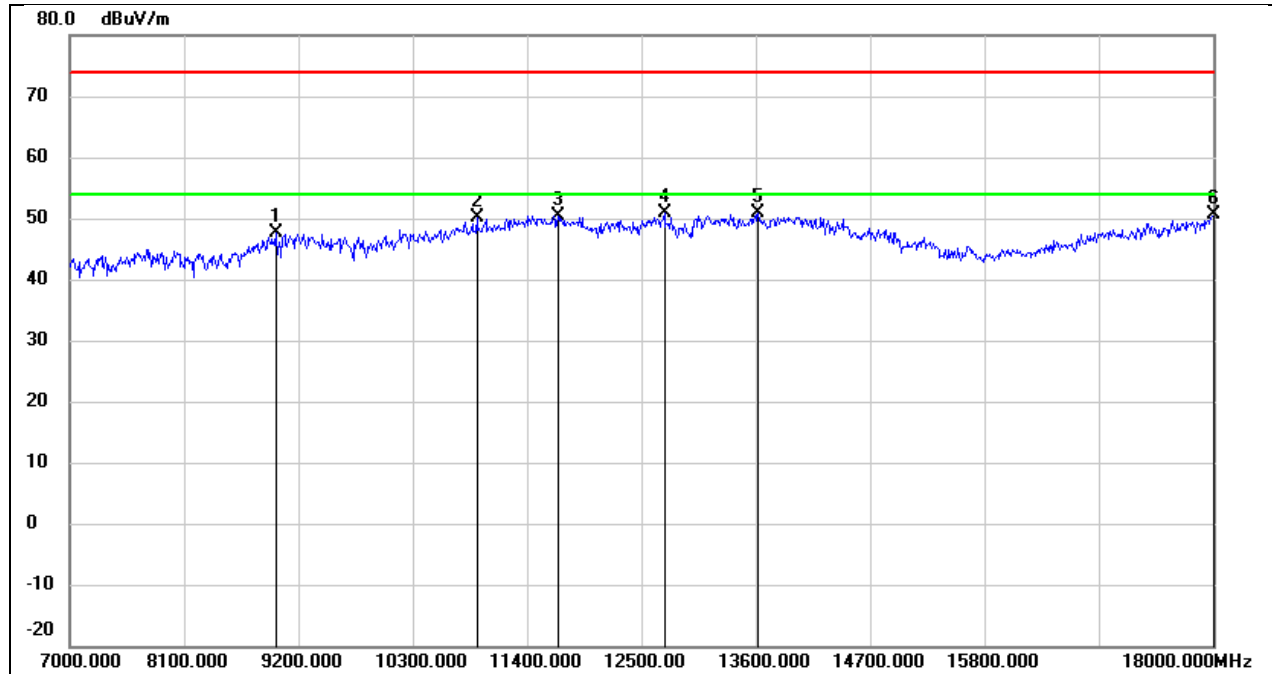


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.44	10.21	47.65	74.00	-26.35	peak
2	10916.000	35.67	14.39	50.06	74.00	-23.94	peak
3	11697.000	33.37	17.13	50.50	74.00	-23.50	peak
4	12720.000	32.71	18.09	50.80	74.00	-23.20	peak
5	13622.000	29.82	20.95	50.77	74.00	-23.23	peak
6	18000.000	24.43	26.12	50.55	74.00	-23.45	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

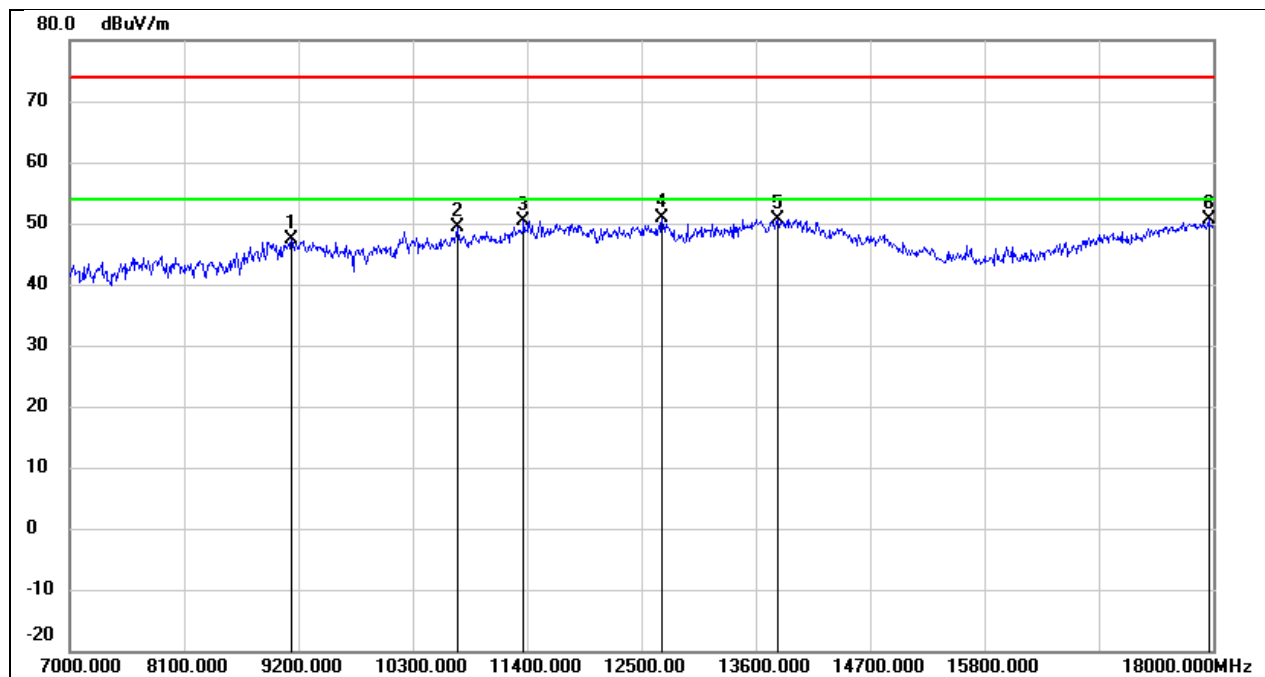


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.94	10.41	47.35	74.00	-26.65	peak
2	10729.000	35.60	13.69	49.29	74.00	-24.71	peak
3	11367.000	34.19	16.22	50.41	74.00	-23.59	peak
4	12698.000	32.79	18.08	50.87	74.00	-23.13	peak
5	13809.000	29.26	21.41	50.67	74.00	-23.33	peak
6	17956.000	24.73	25.82	50.55	74.00	-23.45	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

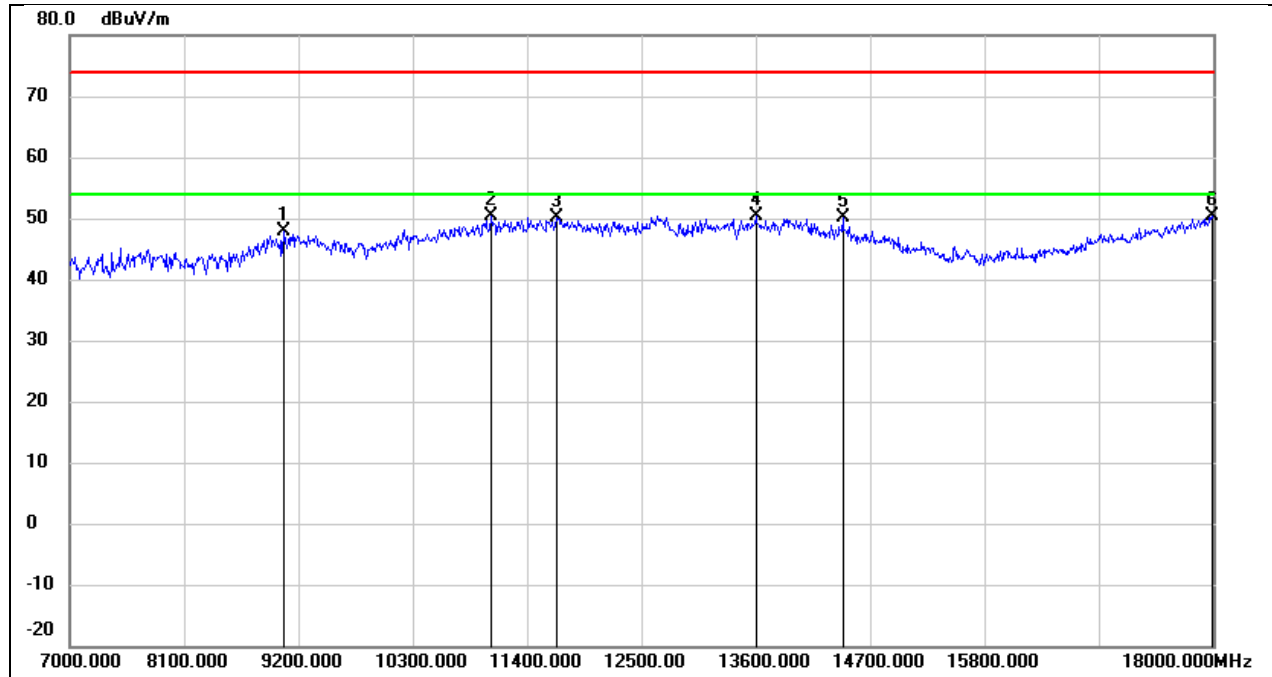


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.62	10.38	48.00	74.00	-26.00	peak
2	11059.000	35.41	14.96	50.37	74.00	-23.63	peak
3	11686.000	32.90	17.12	50.02	74.00	-23.98	peak
4	13600.000	29.54	20.89	50.43	74.00	-23.57	peak
5	14436.000	30.10	20.05	50.15	74.00	-23.85	peak
6	17989.000	24.22	26.04	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

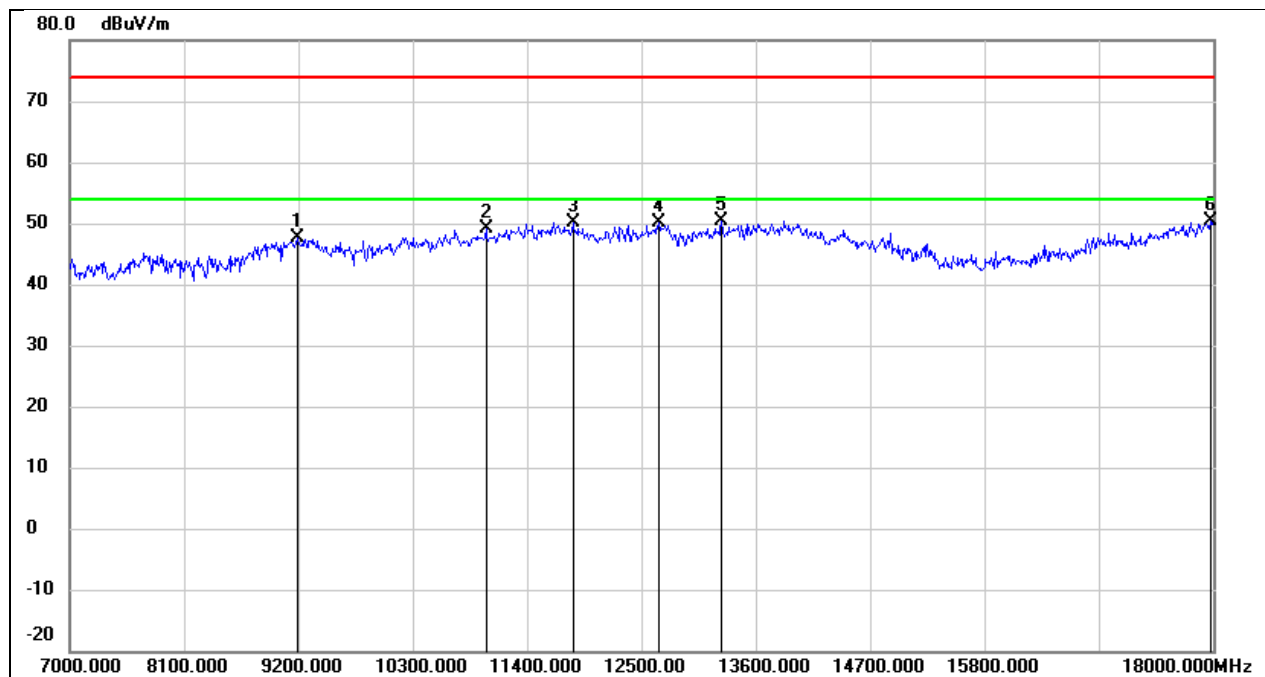


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.12	10.46	47.58	74.00	-26.42	peak
2	11004.000	34.39	14.74	49.13	74.00	-24.87	peak
3	11840.000	32.70	17.40	50.10	74.00	-23.90	peak
4	12665.000	32.01	18.04	50.05	74.00	-23.95	peak
5	13270.000	30.82	19.63	50.45	74.00	-23.55	peak
6	17978.000	24.37	25.97	50.34	74.00	-23.66	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

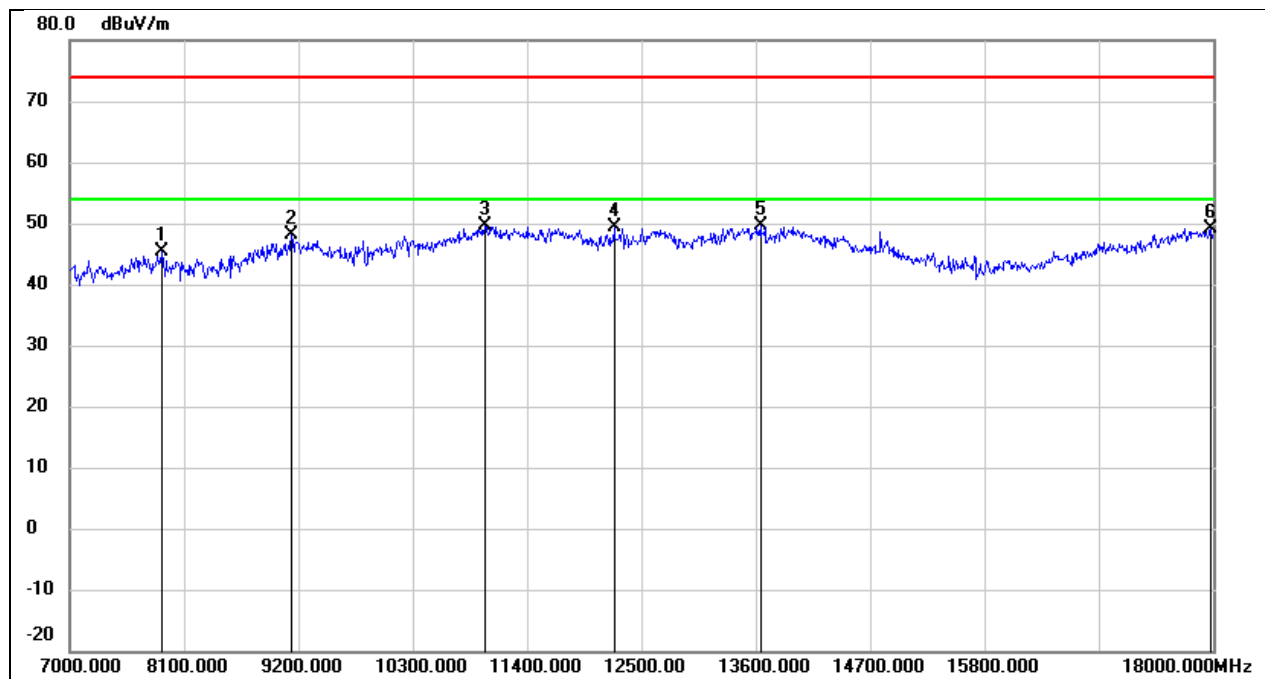


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	38.79	6.54	45.33	74.00	-28.67	peak
2	9134.000	37.73	10.41	48.14	74.00	-25.86	peak
3	10993.000	34.94	14.70	49.64	74.00	-24.36	peak
4	12236.000	31.70	17.76	49.46	74.00	-24.54	peak
5	13644.000	28.64	20.99	49.63	74.00	-24.37	peak
6	17978.000	23.27	25.97	49.24	74.00	-24.76	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

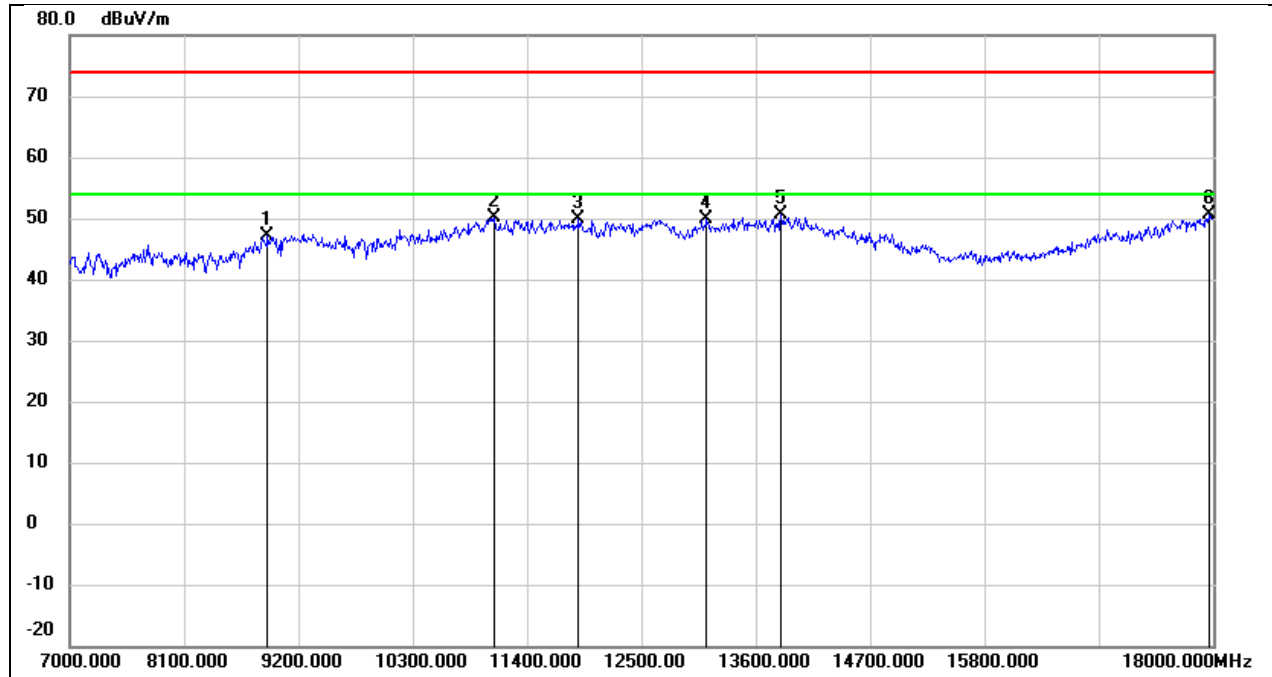


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	37.54	9.66	47.20	74.00	-26.80	peak
2	11081.000	34.97	15.05	50.02	74.00	-23.98	peak
3	11895.000	32.47	17.51	49.98	74.00	-24.02	peak
4	13127.000	30.81	19.01	49.82	74.00	-24.18	peak
5	13842.000	29.04	21.49	50.53	74.00	-23.47	peak
6	17956.000	24.69	25.82	50.51	74.00	-23.49	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

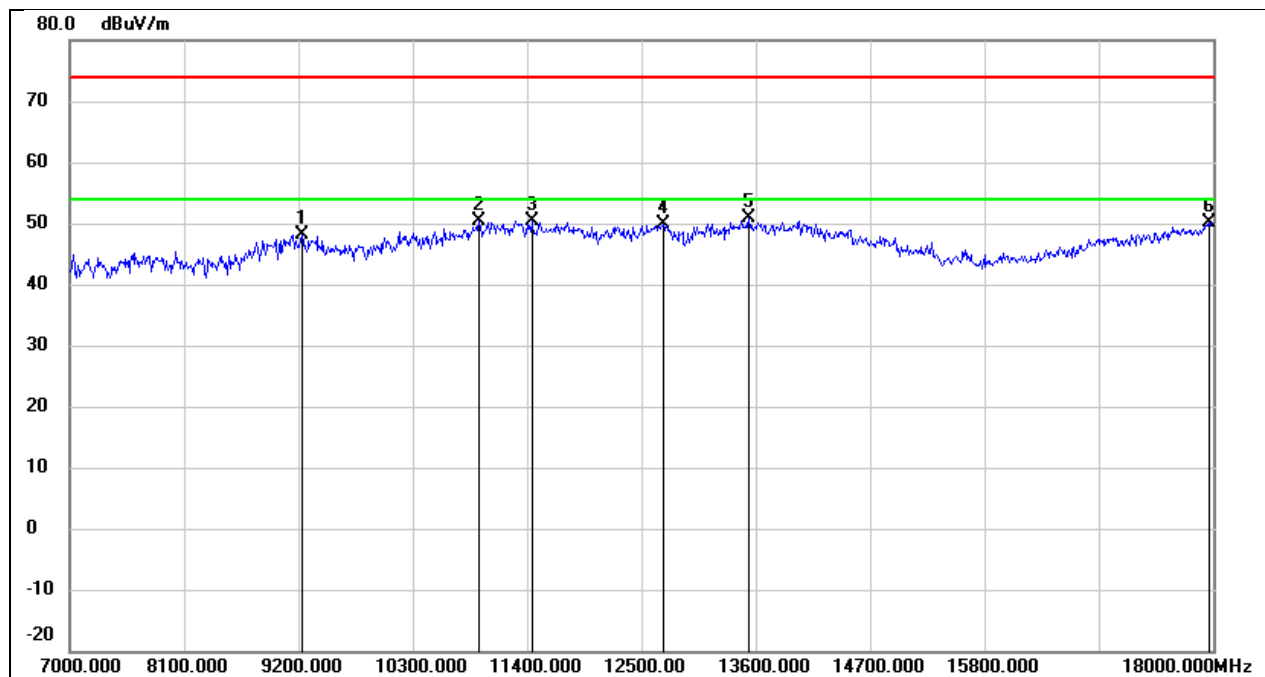


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.67	10.48	48.15	74.00	-25.85	peak
2	10938.000	35.99	14.48	50.47	74.00	-23.53	peak
3	11444.000	33.81	16.53	50.34	74.00	-23.66	peak
4	12709.000	31.85	18.09	49.94	74.00	-24.06	peak
5	13534.000	30.19	20.73	50.92	74.00	-23.08	peak
6	17956.000	24.36	25.82	50.18	74.00	-23.82	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

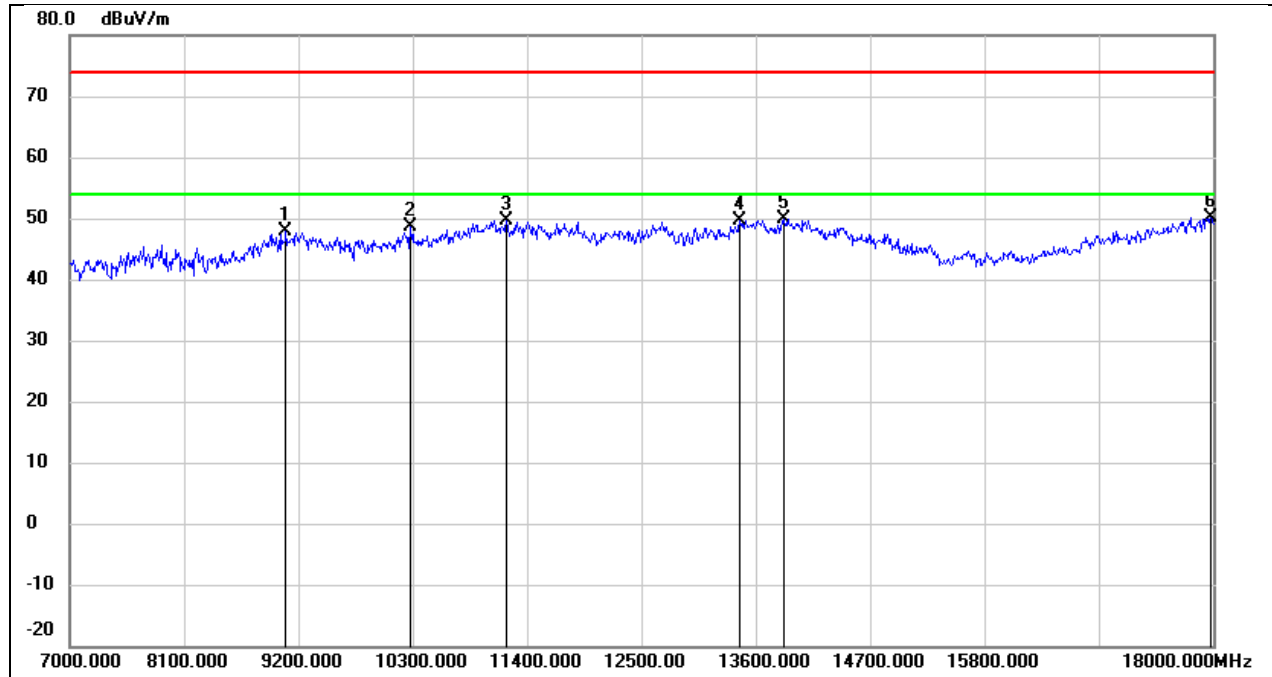


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	37.50	10.39	47.89	74.00	-26.11	peak
2	10278.000	36.19	12.35	48.54	74.00	-25.46	peak
3	11202.000	34.01	15.55	49.56	74.00	-24.44	peak
4	13446.000	29.15	20.41	49.56	74.00	-24.44	peak
5	13875.000	28.26	21.57	49.83	74.00	-24.17	peak
6	17978.000	24.24	25.97	50.21	74.00	-23.79	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

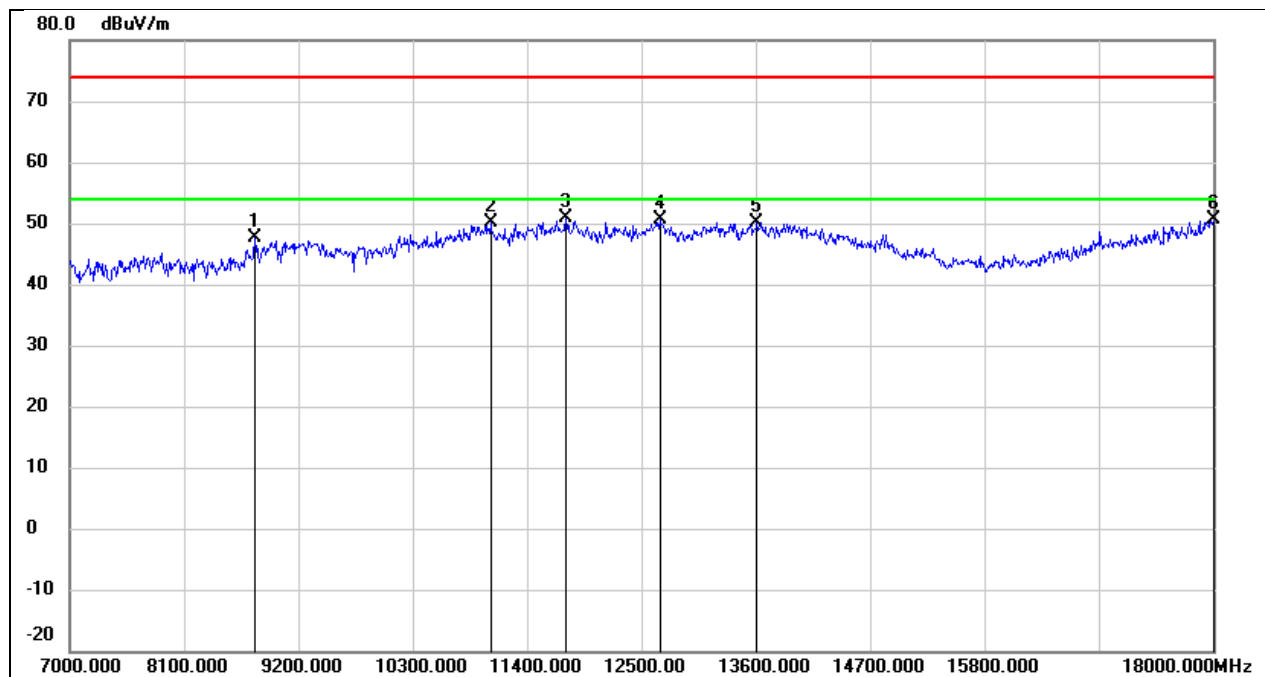


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8782.000	38.76	8.84	47.60	74.00	-26.40	peak
2	11048.000	35.19	14.91	50.10	74.00	-23.90	peak
3	11774.000	33.58	17.28	50.86	74.00	-23.14	peak
4	12676.000	32.49	18.05	50.54	74.00	-23.46	peak
5	13611.000	29.12	20.92	50.04	74.00	-23.96	peak
6	18000.000	24.49	26.12	50.61	74.00	-23.39	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

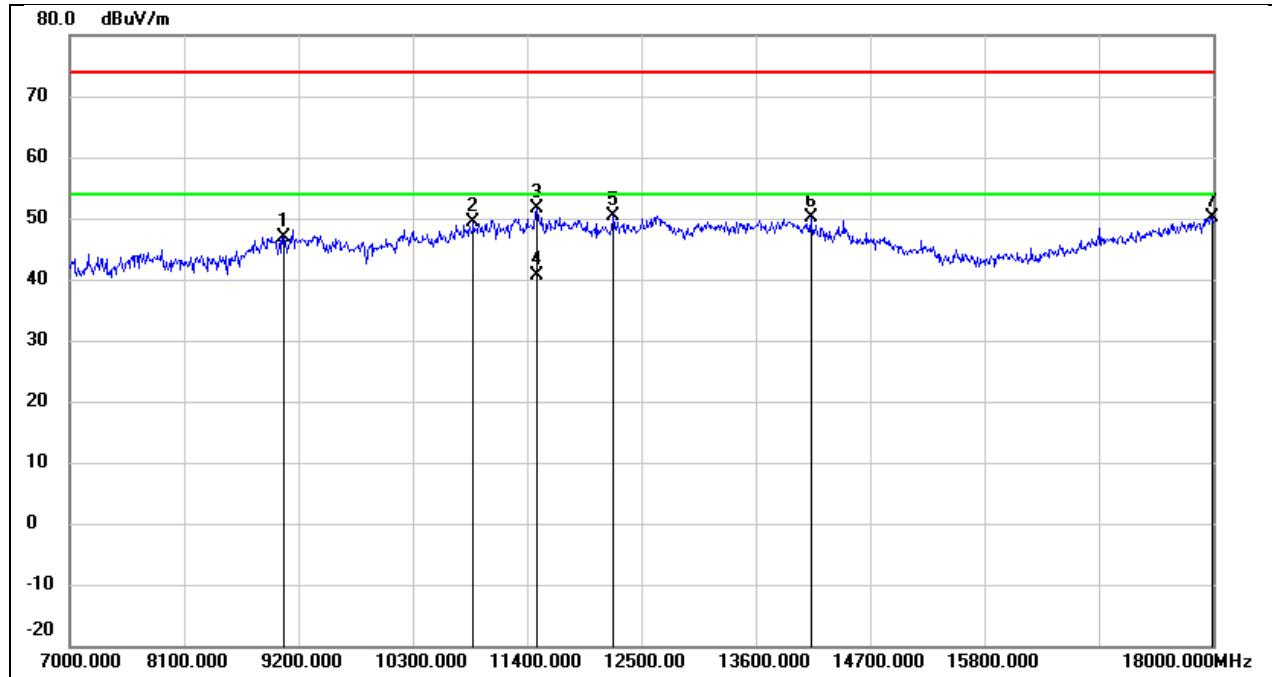


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	36.58	10.38	46.96	74.00	-27.04	peak
2	10883.000	35.05	14.27	49.32	74.00	-24.68	peak
3	11499.000	34.77	16.77	51.54	74.00	-22.46	peak
4	11499.000	23.81	16.77	40.58	54.00	-13.42	AVG
5	12225.000	32.70	17.75	50.45	74.00	-23.55	peak
6	14128.000	28.80	21.34	50.14	74.00	-23.86	peak
7	17989.000	24.10	26.04	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

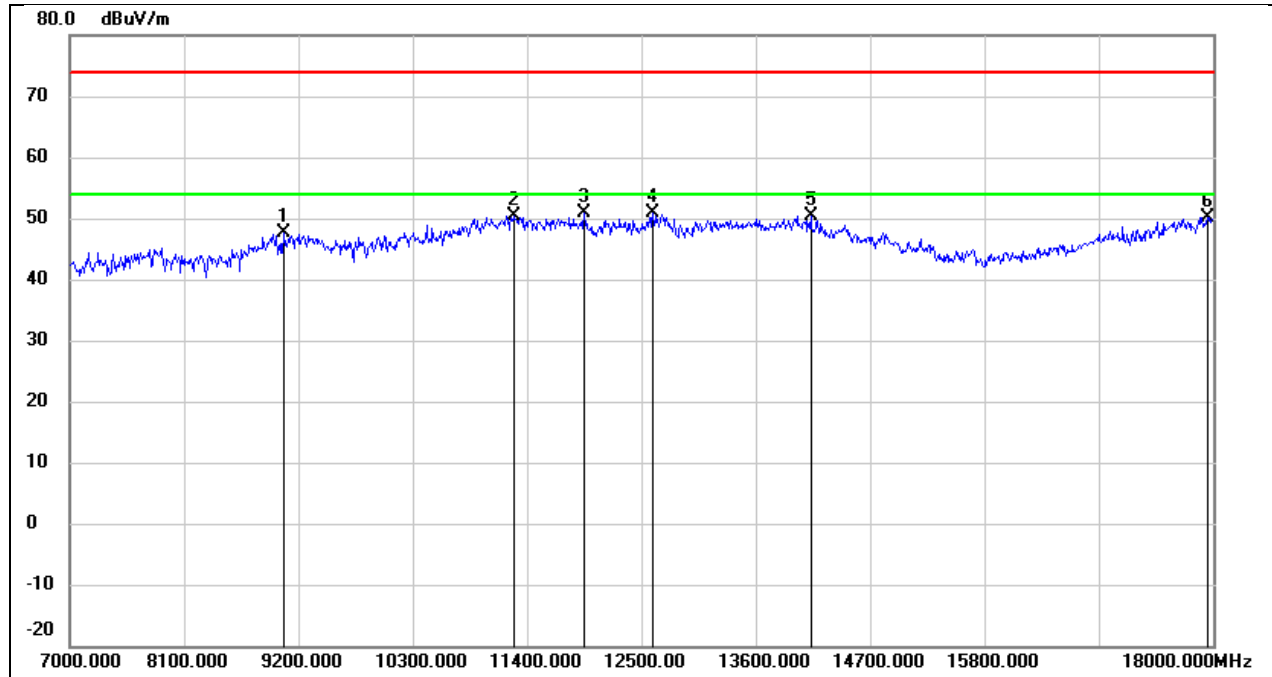


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.29	10.38	47.67	74.00	-26.33	peak
2	11268.000	34.57	15.83	50.40	74.00	-23.60	peak
3	11950.000	33.17	17.61	50.78	74.00	-23.22	peak
4	12610.000	32.80	17.97	50.77	74.00	-23.23	peak
5	14128.000	28.93	21.34	50.27	74.00	-23.73	peak
6	17945.000	24.44	25.75	50.19	74.00	-23.81	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

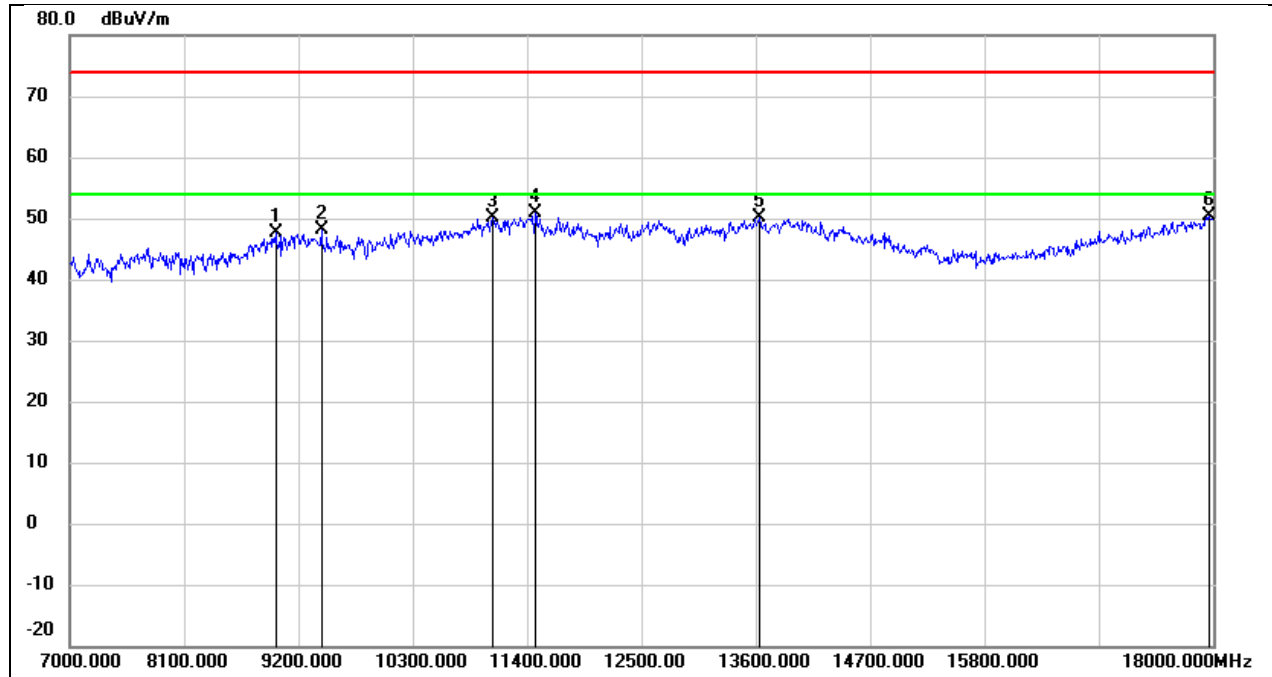


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.44	10.21	47.65	74.00	-26.35	peak
2	9420.000	37.41	10.60	48.01	74.00	-25.99	peak
3	11070.000	35.13	15.01	50.14	74.00	-23.86	peak
4	11477.000	34.20	16.67	50.87	74.00	-23.13	peak
5	13633.000	29.13	20.97	50.10	74.00	-23.90	peak
6	17956.000	24.44	25.82	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

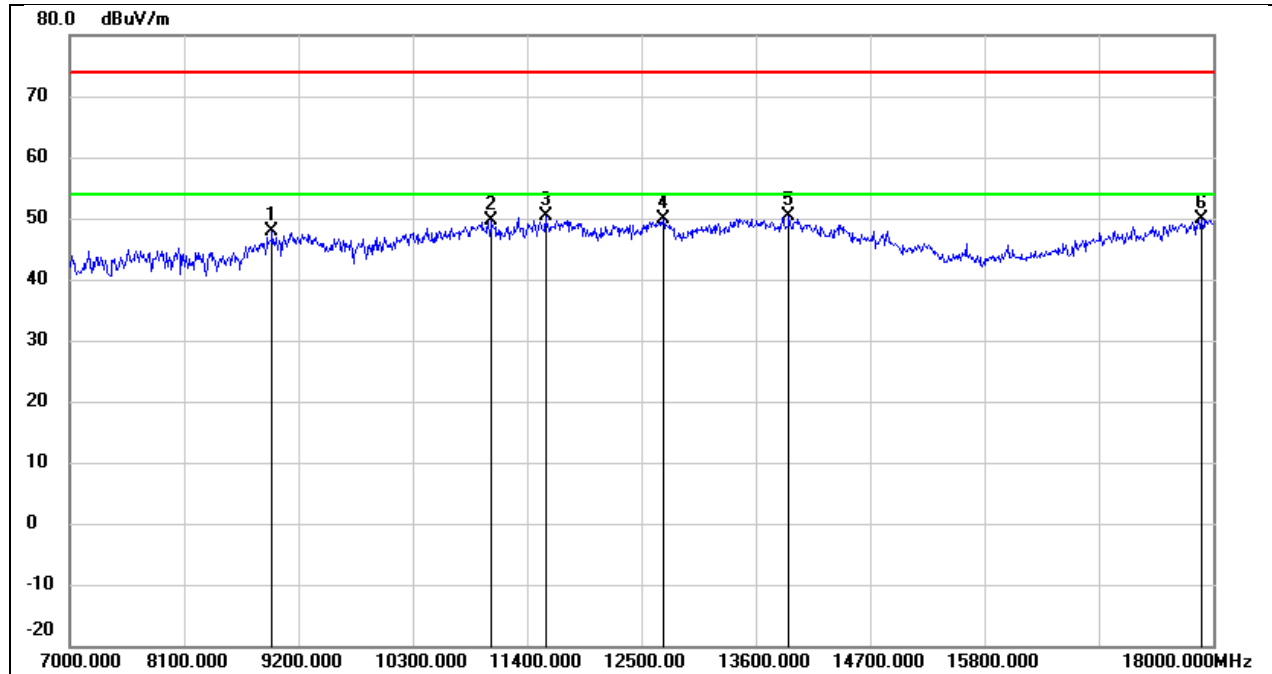


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8947.000	37.94	9.98	47.92	74.00	-26.08	peak
2	11059.000	34.63	14.96	49.59	74.00	-24.41	peak
3	11576.000	33.42	16.91	50.33	74.00	-23.67	peak
4	12709.000	31.77	18.09	49.86	74.00	-24.14	peak
5	13919.000	28.81	21.68	50.49	74.00	-23.51	peak
6	17890.000	24.53	25.37	49.90	74.00	-24.10	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

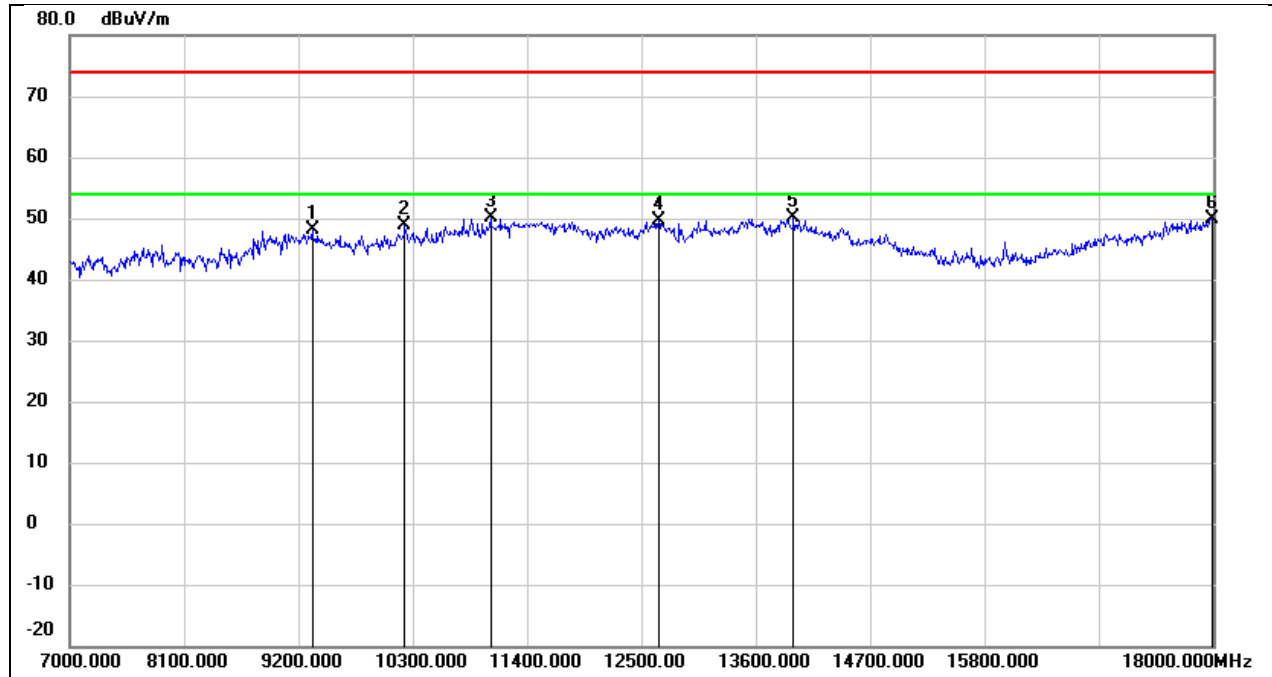


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.55	10.54	48.09	74.00	-25.91	peak
2	10223.000	36.66	12.24	48.90	74.00	-25.10	peak
3	11048.000	35.23	14.91	50.14	74.00	-23.86	peak
4	12665.000	31.61	18.04	49.65	74.00	-24.35	peak
5	13963.000	28.41	21.78	50.19	74.00	-23.81	peak
6	17989.000	23.93	26.04	49.97	74.00	-24.03	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

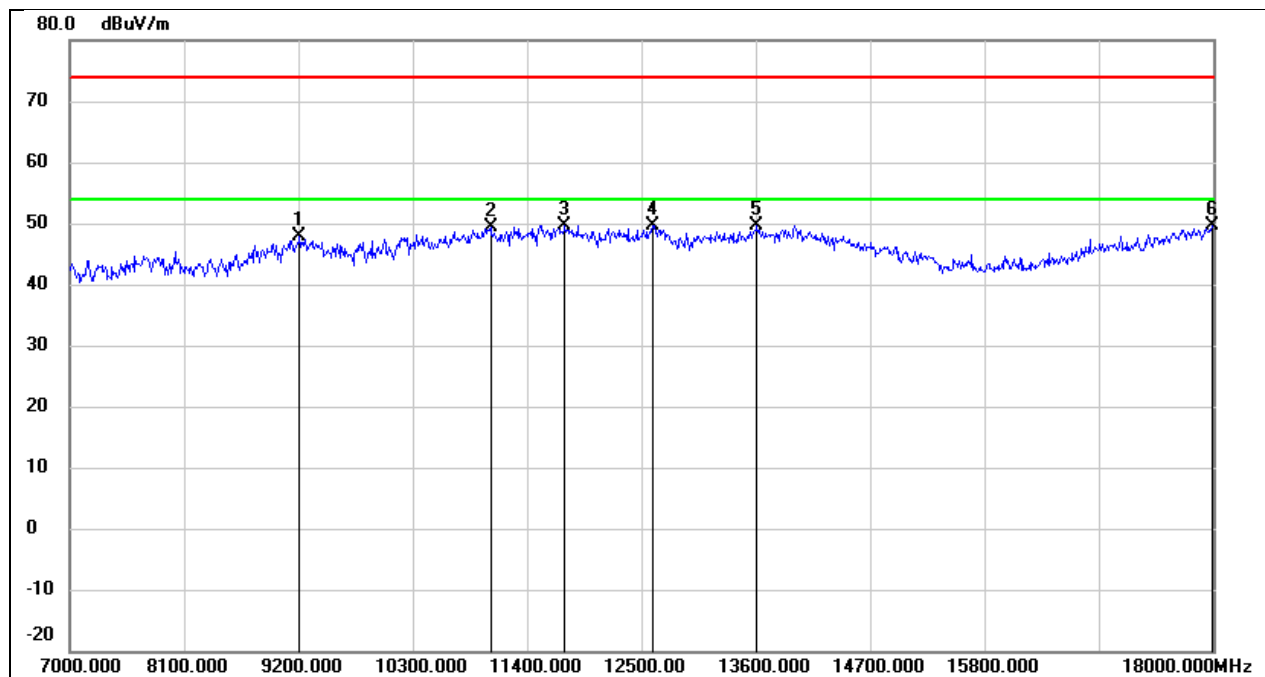


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.36	10.47	47.83	74.00	-26.17	peak
2	11048.000	34.36	14.91	49.27	74.00	-24.73	peak
3	11763.000	32.40	17.26	49.66	74.00	-24.34	peak
4	12610.000	31.77	17.97	49.74	74.00	-24.26	peak
5	13611.000	28.76	20.92	49.68	74.00	-24.32	peak
6	17989.000	23.60	26.04	49.64	74.00	-24.36	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

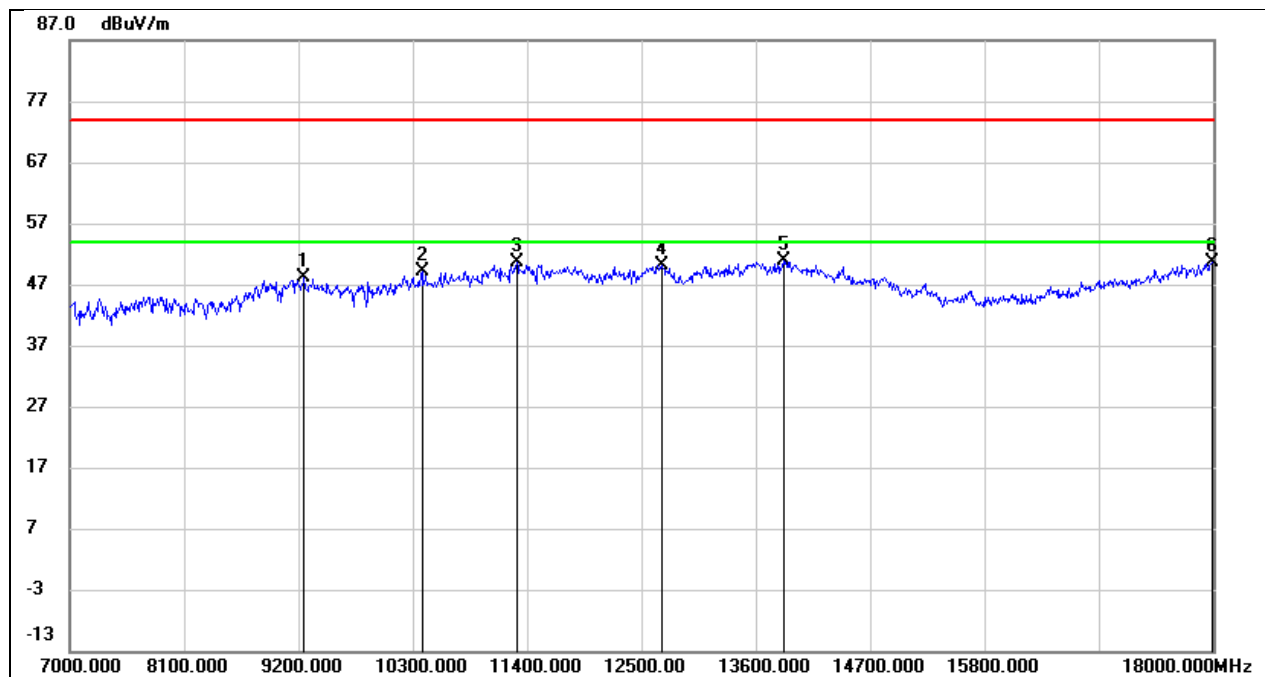


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.60	10.51	48.11	74.00	-25.89	peak
2	10388.000	36.64	12.59	49.23	74.00	-24.77	peak
3	11301.000	34.73	15.95	50.68	74.00	-23.32	peak
4	12698.000	32.07	18.08	50.15	74.00	-23.85	peak
5	13864.000	29.32	21.53	50.85	74.00	-23.15	peak
6	17989.000	24.51	26.04	50.55	74.00	-23.45	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

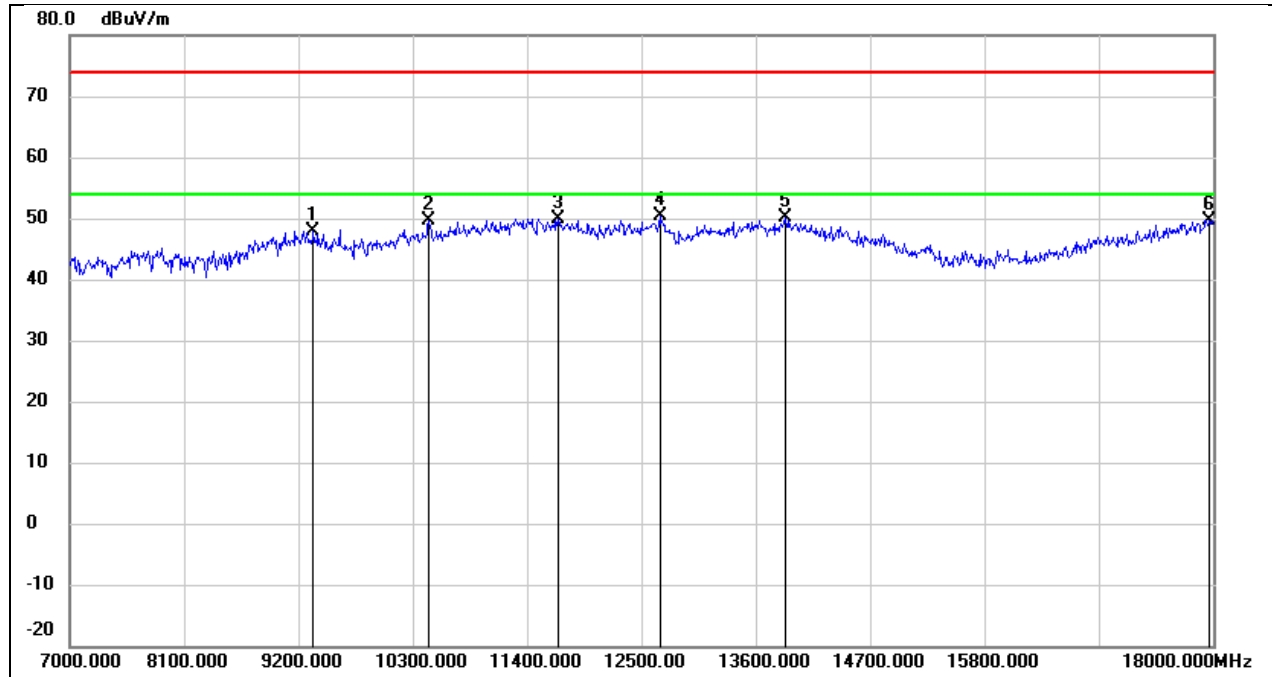


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.36	10.55	47.91	74.00	-26.09	peak
2	10454.000	36.86	12.73	49.59	74.00	-24.41	peak
3	11697.000	32.85	17.13	49.98	74.00	-24.02	peak
4	12676.000	32.23	18.05	50.28	74.00	-23.72	peak
5	13886.000	28.51	21.60	50.11	74.00	-23.89	peak
6	17967.000	23.80	25.89	49.69	74.00	-24.31	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

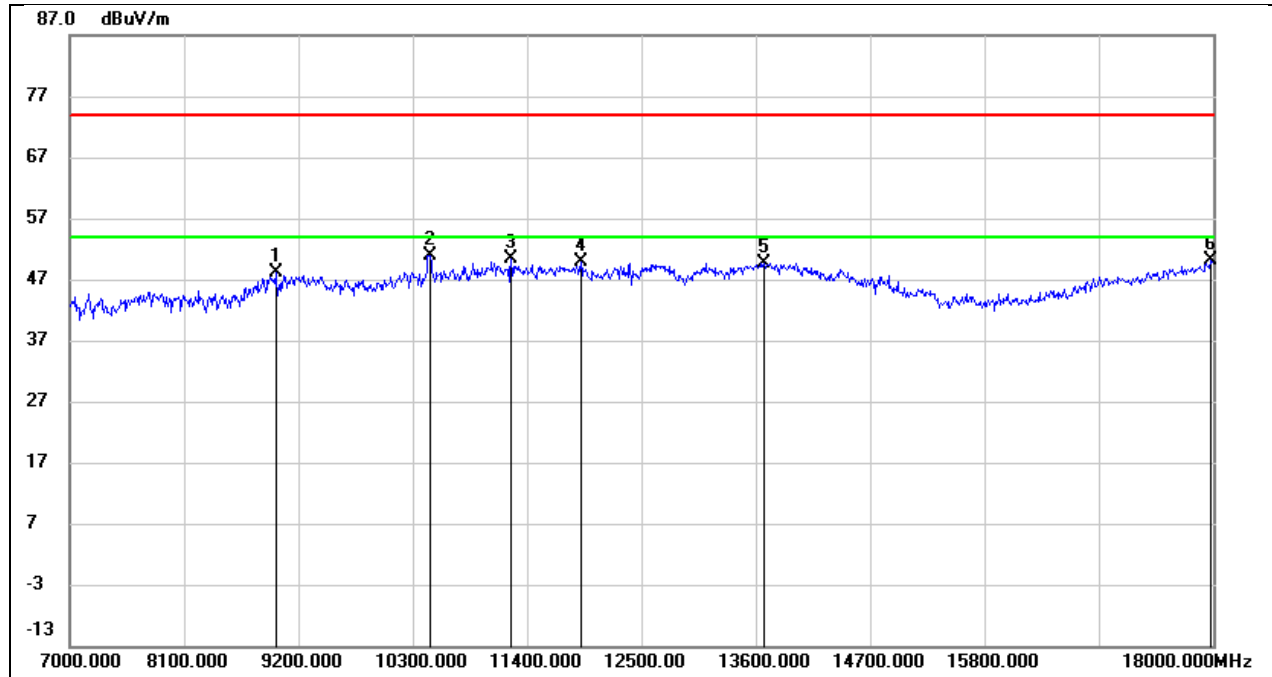


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.91	10.21	48.12	74.00	-25.88	peak
2	10465.000	38.13	12.75	50.88	74.00	-23.12	peak
3	11246.000	34.73	15.73	50.46	74.00	-23.54	peak
4	11917.000	32.44	17.54	49.98	74.00	-24.02	peak
5	13677.000	28.52	21.08	49.60	74.00	-24.40	peak
6	17978.000	24.10	25.97	50.07	74.00	-23.93	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

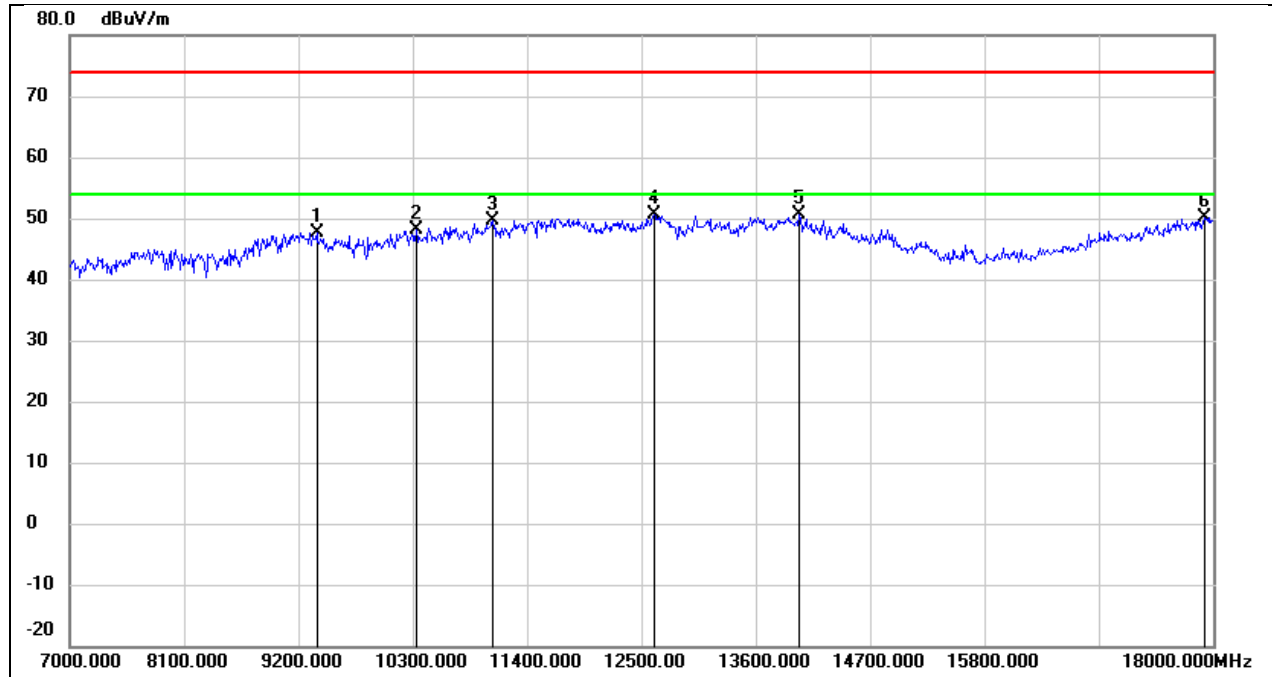


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	37.05	10.58	47.63	74.00	-26.37	peak
2	10333.000	35.58	12.47	48.05	74.00	-25.95	peak
3	11070.000	34.69	15.01	49.70	74.00	-24.30	peak
4	12621.000	32.75	17.98	50.73	74.00	-23.27	peak
5	14018.000	28.79	21.80	50.59	74.00	-23.41	peak
6	17923.000	24.52	25.60	50.12	74.00	-23.88	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

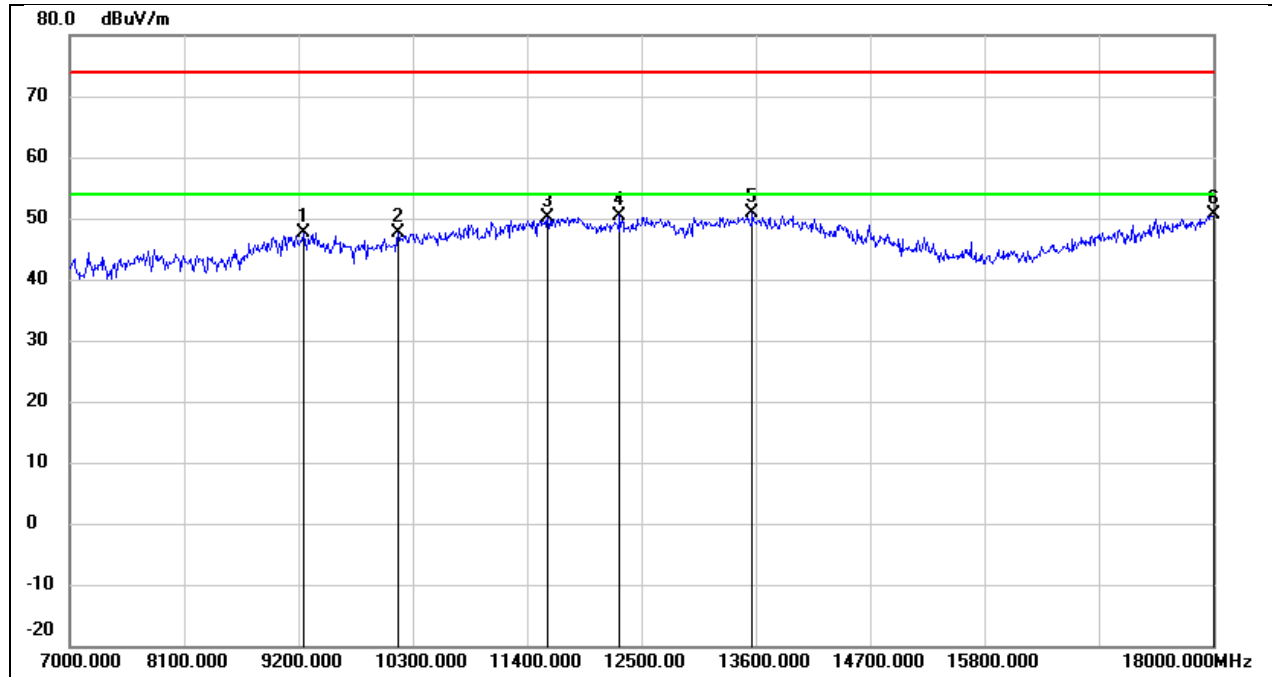


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.07	10.49	47.56	74.00	-26.44	peak
2	10157.000	35.64	12.10	47.74	74.00	-26.26	peak
3	11598.000	33.19	16.96	50.15	74.00	-23.85	peak
4	12291.000	32.72	17.78	50.50	74.00	-23.50	peak
5	13567.000	30.01	20.80	50.81	74.00	-23.19	peak
6	18000.000	24.54	26.12	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

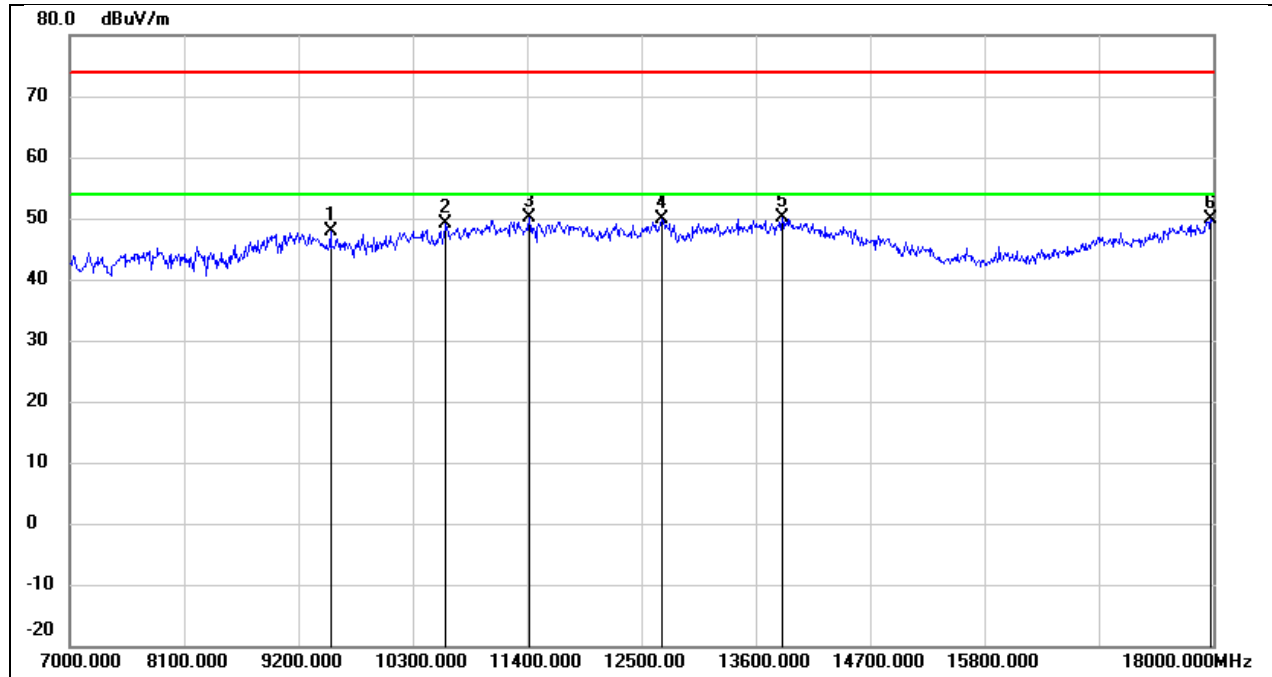


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	37.30	10.67	47.97	74.00	-26.03	peak
2	10619.000	35.89	13.28	49.17	74.00	-24.83	peak
3	11422.000	33.61	16.46	50.07	74.00	-23.93	peak
4	12698.000	31.78	18.08	49.86	74.00	-24.14	peak
5	13853.000	28.50	21.52	50.02	74.00	-23.98	peak
6	17978.000	24.01	25.97	49.98	74.00	-24.02	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

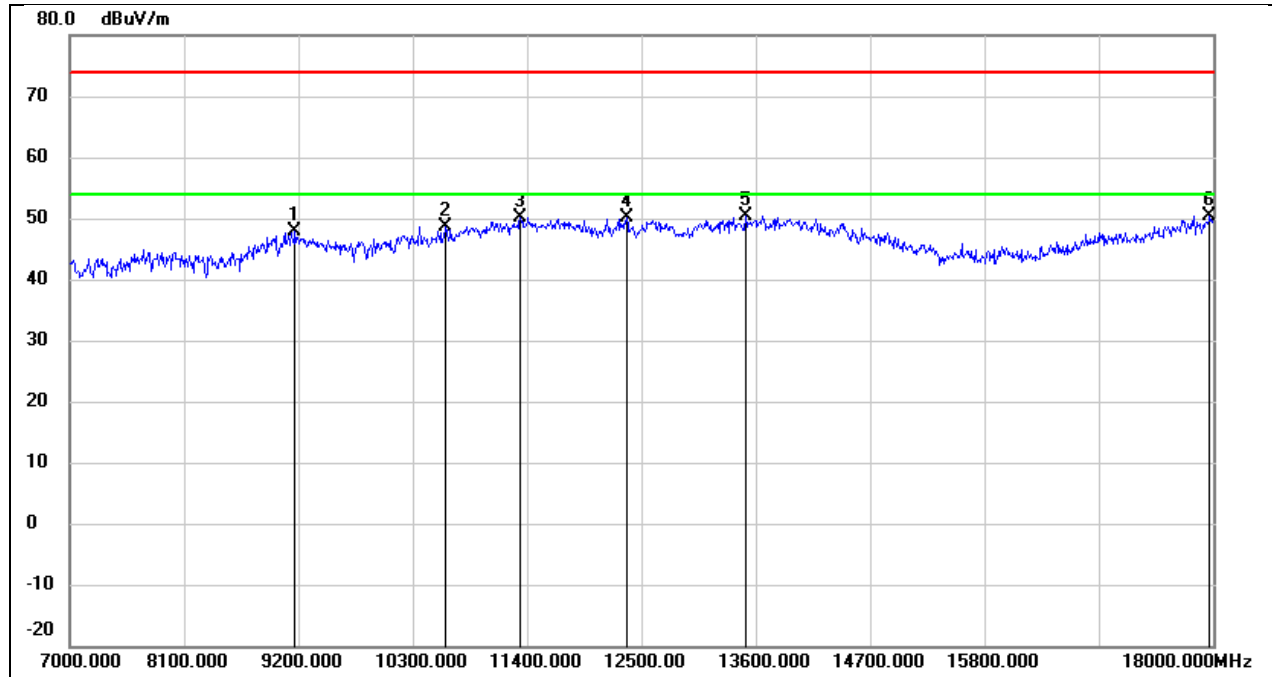


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.40	10.45	47.85	74.00	-26.15	peak
2	10619.000	35.34	13.28	48.62	74.00	-25.38	peak
3	11334.000	34.07	16.09	50.16	74.00	-23.84	peak
4	12357.000	32.39	17.79	50.18	74.00	-23.82	peak
5	13501.000	29.76	20.64	50.40	74.00	-23.60	peak
6	17967.000	24.46	25.89	50.35	74.00	-23.65	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

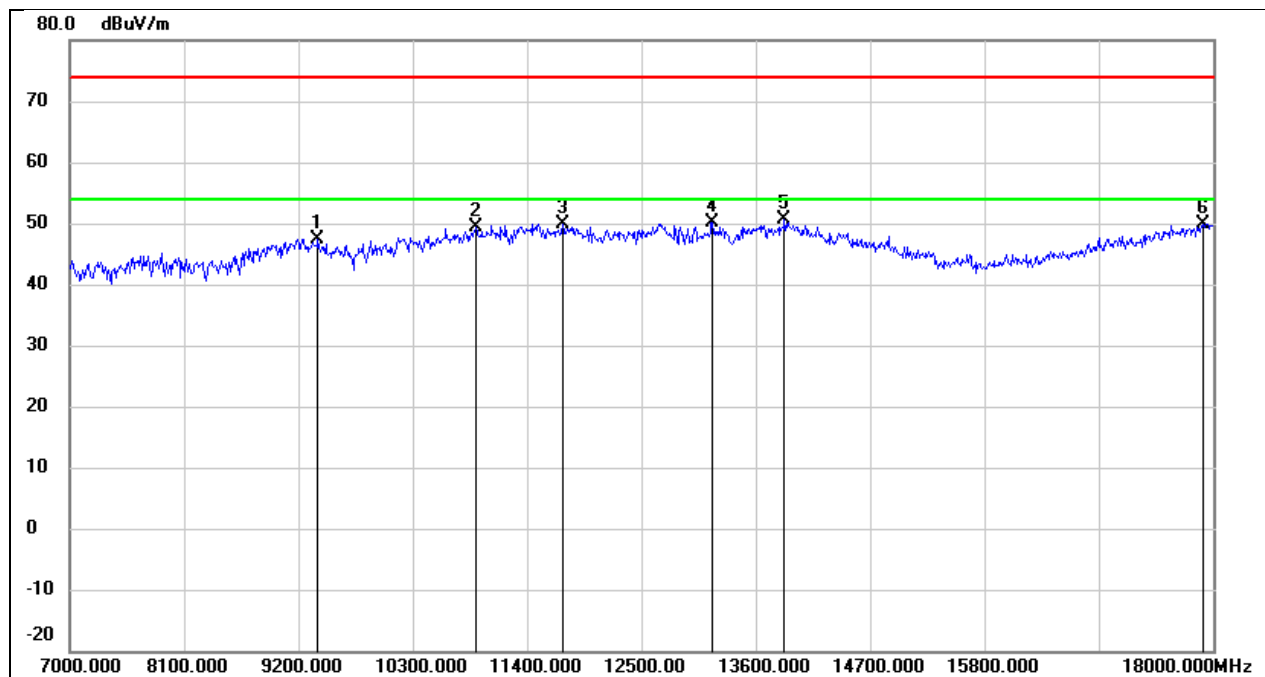


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	36.88	10.58	47.46	74.00	-26.54	peak
2	10905.000	35.13	14.36	49.49	74.00	-24.51	peak
3	11741.000	32.77	17.22	49.99	74.00	-24.01	peak
4	13182.000	30.94	19.24	50.18	74.00	-23.82	peak
5	13875.000	29.14	21.57	50.71	74.00	-23.29	peak
6	17901.000	24.43	25.45	49.88	74.00	-24.12	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

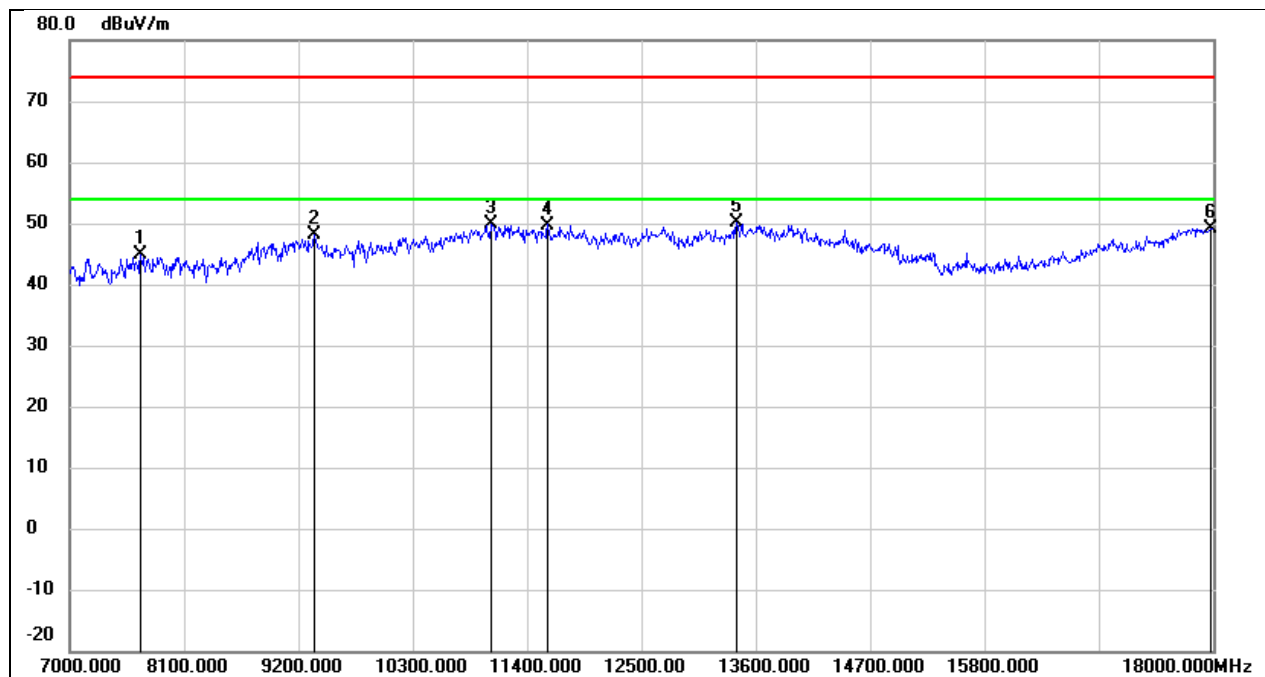


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7682.000	38.16	6.71	44.87	74.00	-29.13	peak
2	9354.000	37.47	10.56	48.03	74.00	-25.97	peak
3	11048.000	34.98	14.91	49.89	74.00	-24.11	peak
4	11598.000	32.79	16.96	49.75	74.00	-24.25	peak
5	13413.000	29.91	20.26	50.17	74.00	-23.83	peak
6	17978.000	23.25	25.97	49.22	74.00	-24.78	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

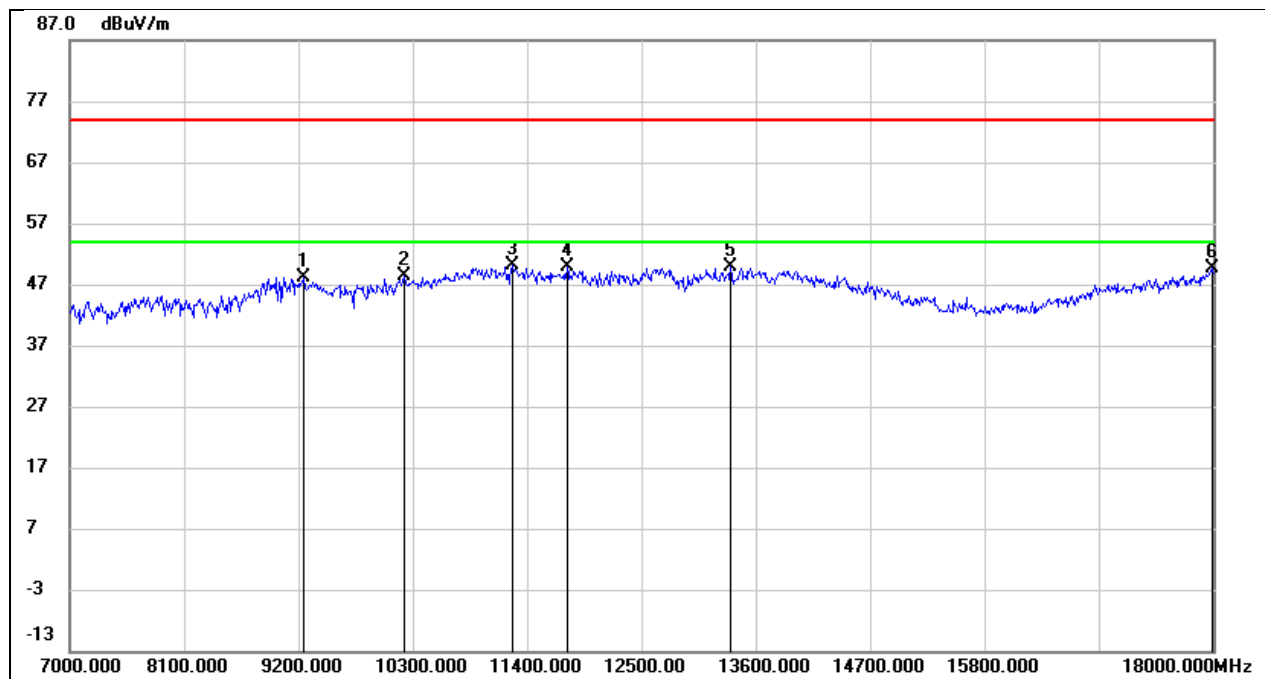


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.69	10.51	48.20	74.00	-25.80	peak
2	10223.000	36.15	12.24	48.39	74.00	-25.61	peak
3	11257.000	34.40	15.78	50.18	74.00	-23.82	peak
4	11785.000	32.63	17.30	49.93	74.00	-24.07	peak
5	13358.000	29.85	20.02	49.87	74.00	-24.13	peak
6	17989.000	23.49	26.04	49.53	74.00	-24.47	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

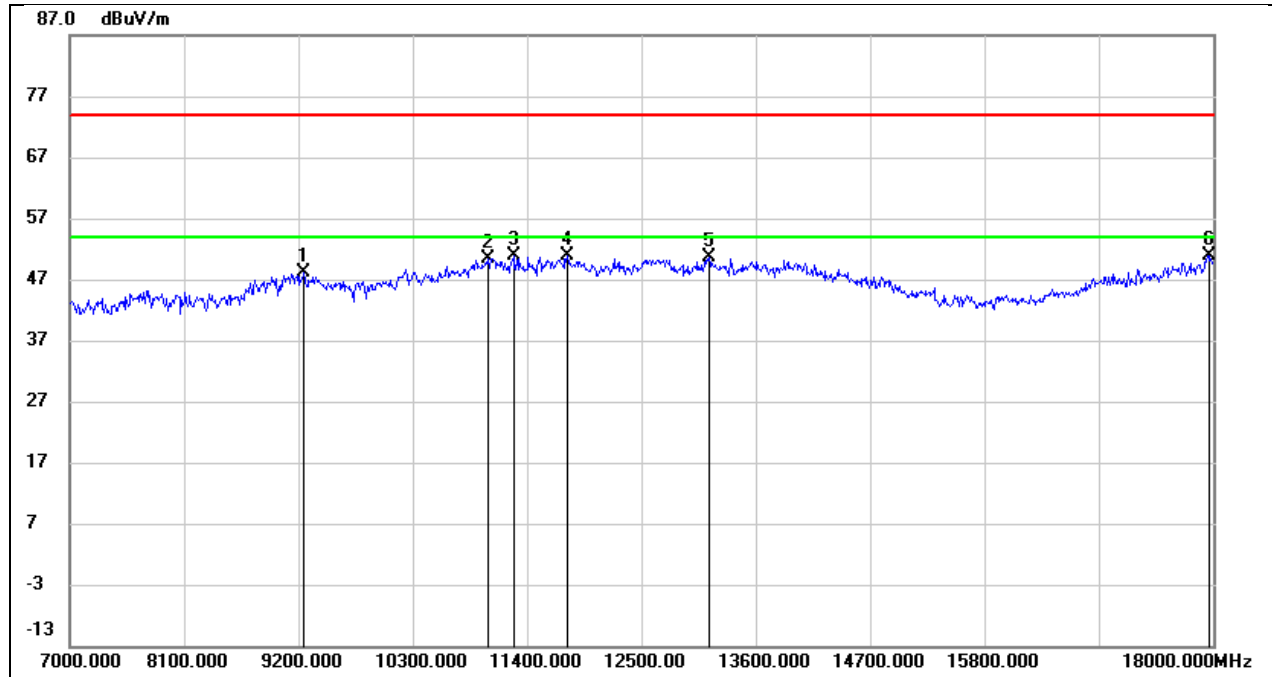


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.72	10.51	48.23	74.00	-25.77	peak
2	11026.000	35.63	14.82	50.45	74.00	-23.55	peak
3	11268.000	35.10	15.83	50.93	74.00	-23.07	peak
4	11785.000	33.58	17.30	50.88	74.00	-23.12	peak
5	13149.000	31.42	19.10	50.52	74.00	-23.48	peak
6	17967.000	25.05	25.89	50.94	74.00	-23.06	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

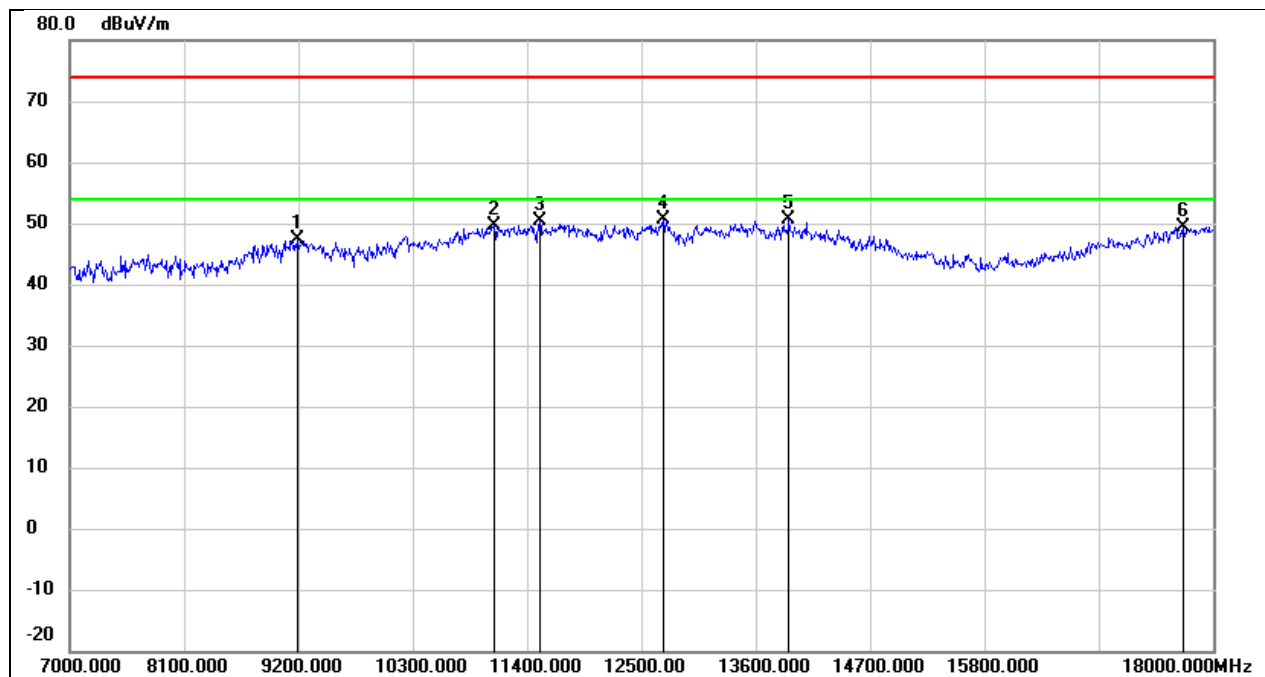


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.85	10.46	47.31	74.00	-26.69	peak
2	11081.000	34.53	15.05	49.58	74.00	-24.42	peak
3	11521.000	33.46	16.82	50.28	74.00	-23.72	peak
4	12709.000	32.55	18.09	50.64	74.00	-23.36	peak
5	13919.000	29.05	21.68	50.73	74.00	-23.27	peak
6	17714.000	25.32	24.16	49.48	74.00	-24.52	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

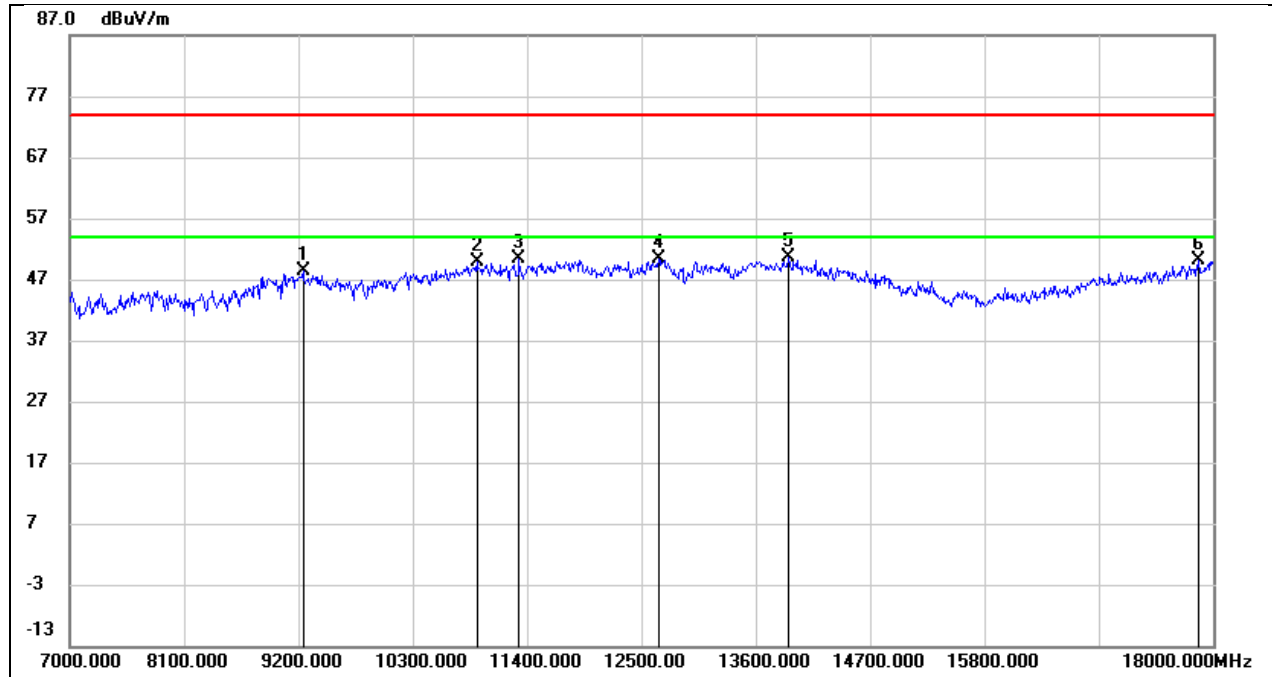


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.99	10.49	48.48	74.00	-25.52	peak
2	10916.000	35.56	14.39	49.95	74.00	-24.05	peak
3	11323.000	34.26	16.05	50.31	74.00	-23.69	peak
4	12665.000	32.26	18.04	50.30	74.00	-23.70	peak
5	13919.000	28.85	21.68	50.53	74.00	-23.47	peak
6	17857.000	24.87	25.14	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

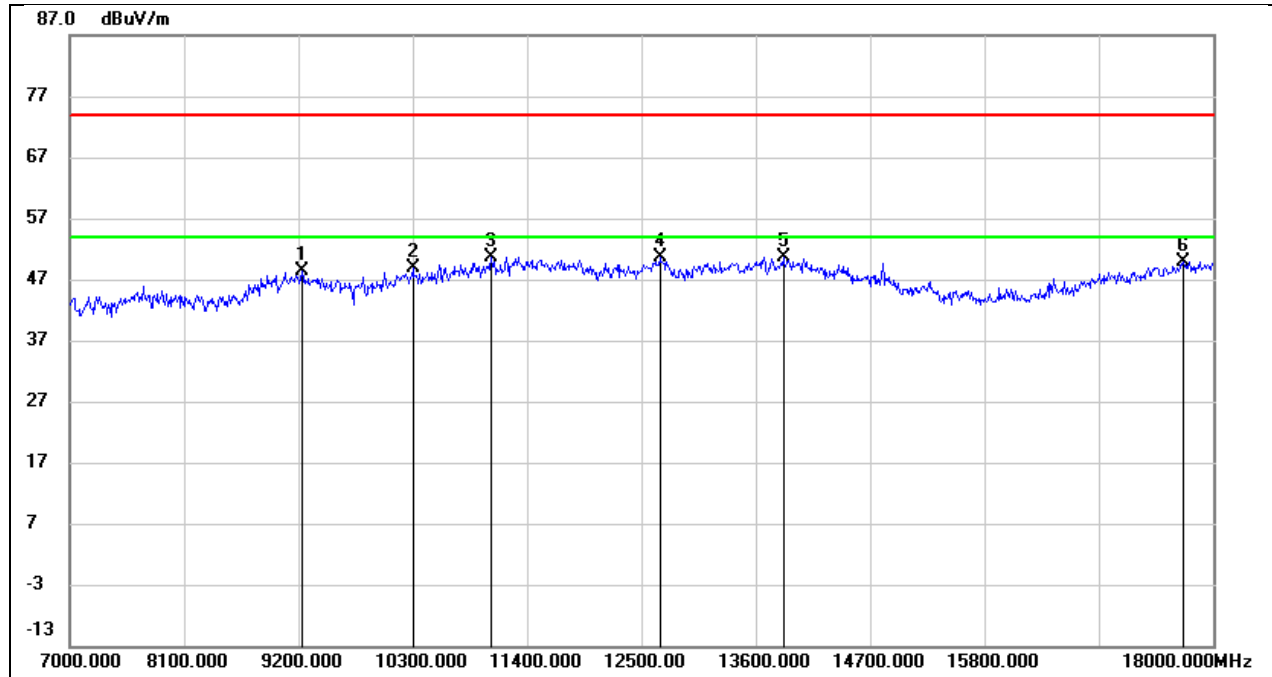


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.92	10.48	48.40	74.00	-25.60	peak
2	10300.000	36.52	12.40	48.92	74.00	-25.08	peak
3	11048.000	35.75	14.91	50.66	74.00	-23.34	peak
4	12676.000	32.48	18.05	50.53	74.00	-23.47	peak
5	13864.000	29.21	21.53	50.74	74.00	-23.26	peak
6	17714.000	25.73	24.16	49.89	74.00	-24.11	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

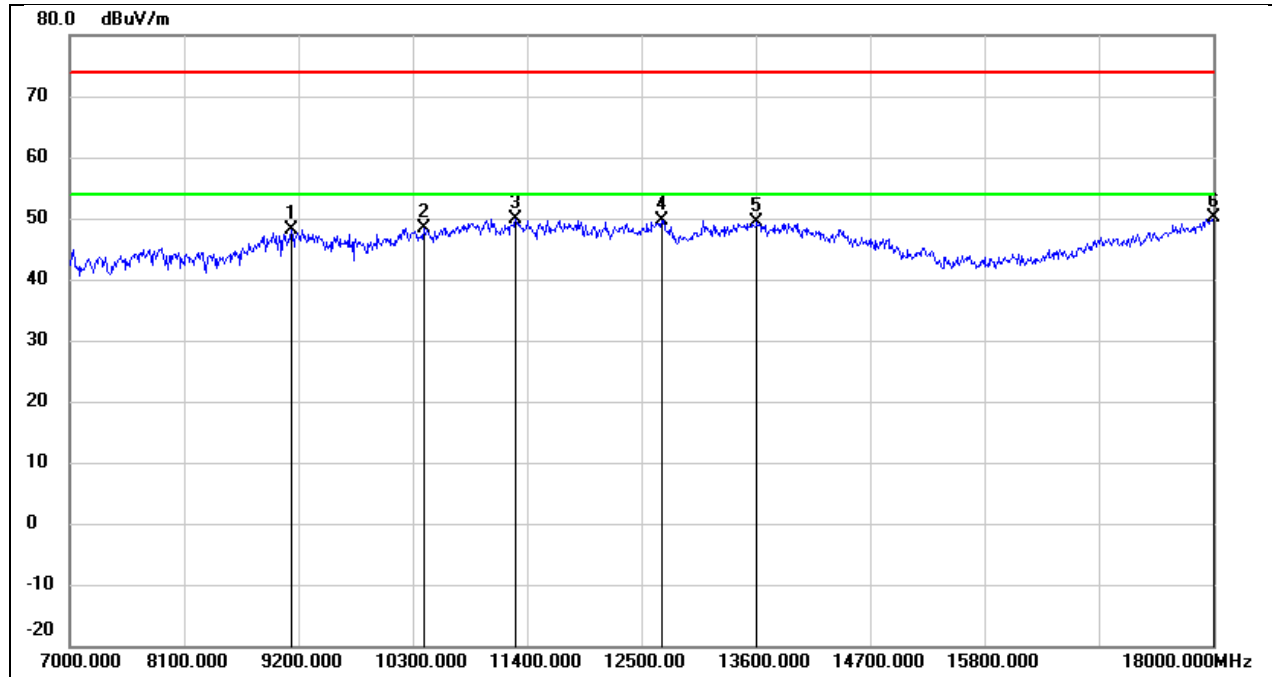


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.68	10.41	48.09	74.00	-25.91	peak
2	10410.000	35.88	12.62	48.50	74.00	-25.50	peak
3	11290.000	33.97	15.90	49.87	74.00	-24.13	peak
4	12698.000	31.61	18.08	49.69	74.00	-24.31	peak
5	13611.000	28.57	20.92	49.49	74.00	-24.51	peak
6	18000.000	23.99	26.12	50.11	74.00	-23.89	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

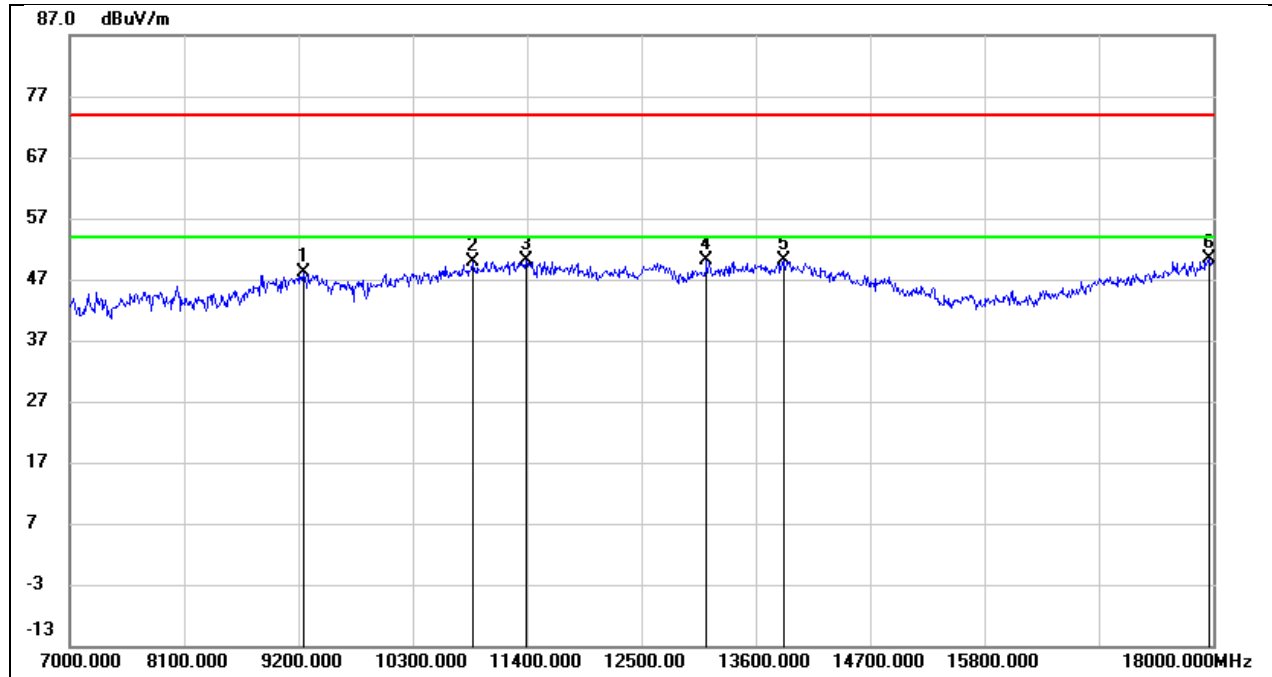


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.59	10.49	48.08	74.00	-25.92	peak
2	10872.000	35.76	14.23	49.99	74.00	-24.01	peak
3	11389.000	33.72	16.31	50.03	74.00	-23.97	peak
4	13127.000	31.07	19.01	50.08	74.00	-23.92	peak
5	13864.000	28.72	21.53	50.25	74.00	-23.75	peak
6	17967.000	24.39	25.89	50.28	74.00	-23.72	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

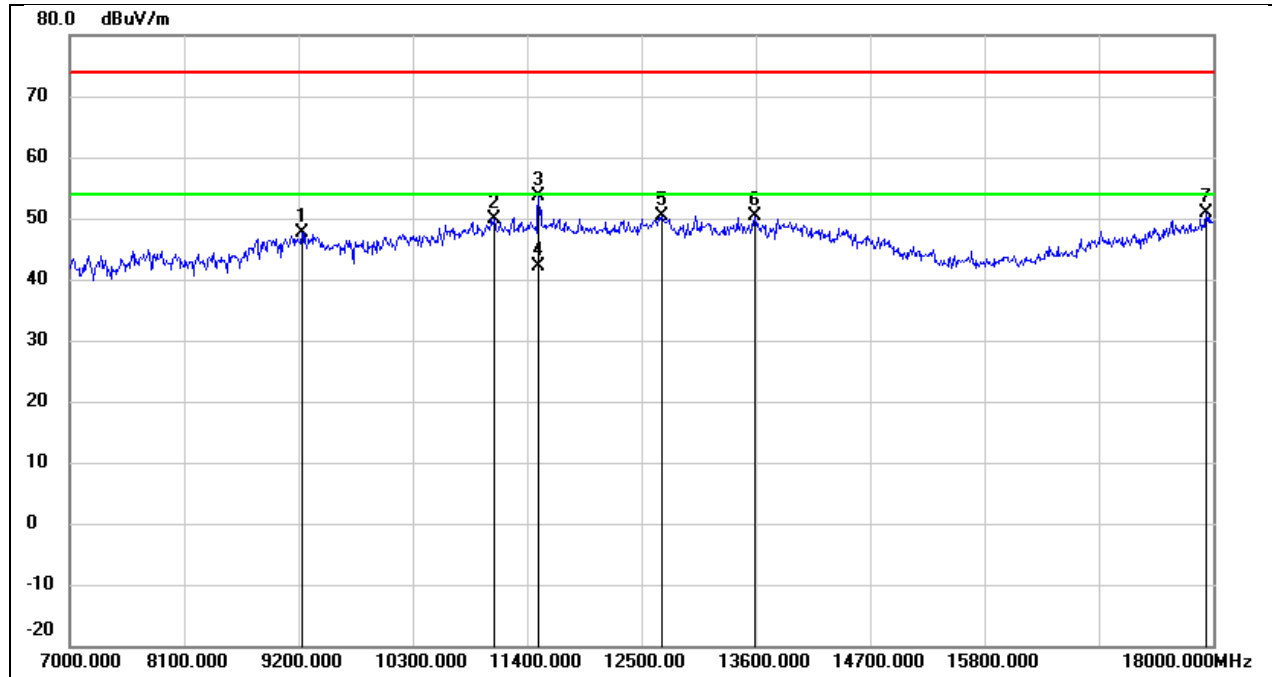


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.17	10.48	47.65	74.00	-26.35	peak
2	11081.000	34.89	15.05	49.94	74.00	-24.06	peak
3	11510.000	36.76	16.79	53.55	74.00	-20.45	peak
4	11510.000	25.46	16.79	42.25	54.00	-11.75	AVG
5	12698.000	32.29	18.08	50.37	74.00	-23.63	peak
6	13589.000	29.49	20.86	50.35	74.00	-23.65	peak
7	17934.000	25.22	25.67	50.89	74.00	-23.11	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

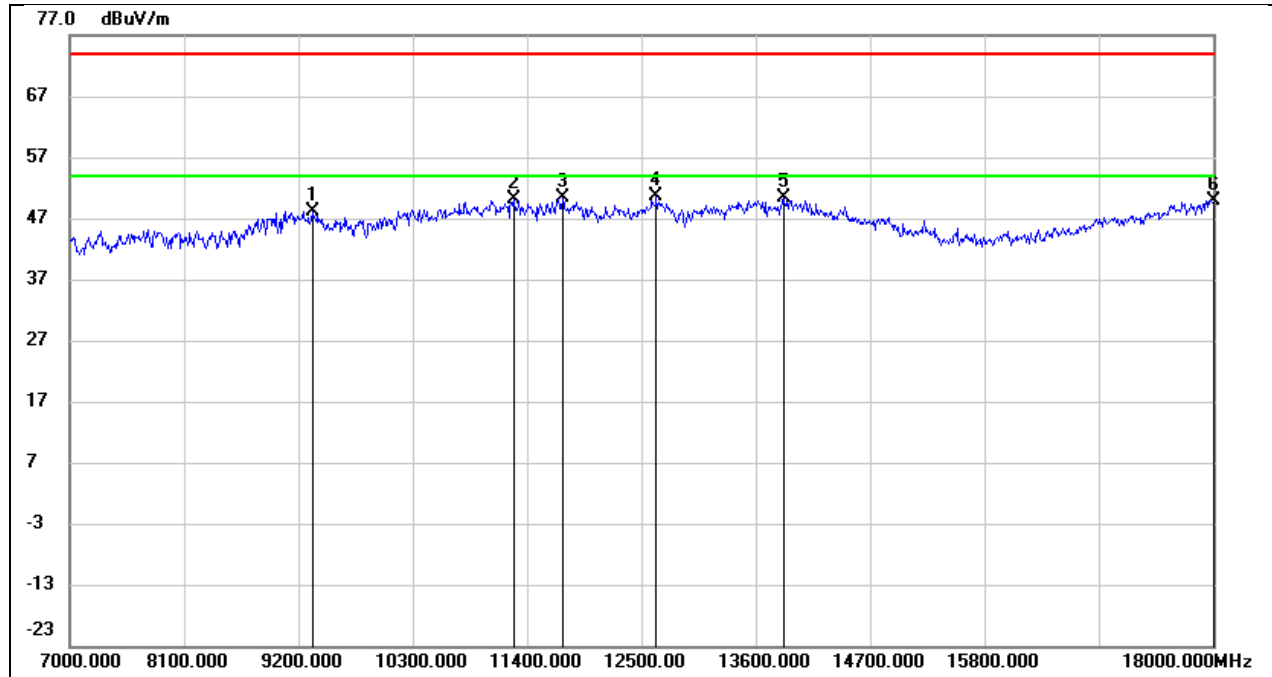


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.65	10.54	48.19	74.00	-25.81	peak
2	11268.000	34.20	15.83	50.03	74.00	-23.97	peak
3	11741.000	33.25	17.22	50.47	74.00	-23.53	peak
4	12643.000	32.69	18.01	50.70	74.00	-23.30	peak
5	13864.000	28.76	21.53	50.29	74.00	-23.71	peak
6	18000.000	23.80	26.12	49.92	74.00	-24.08	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

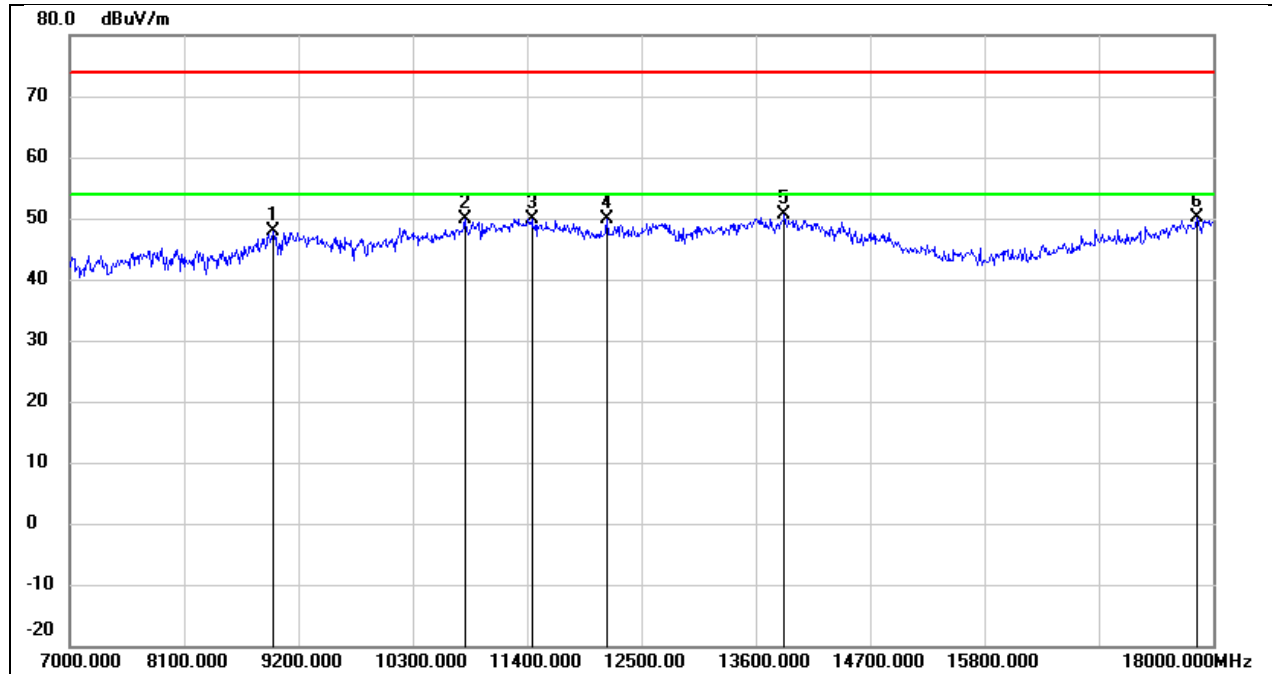


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.80	10.05	47.85	74.00	-26.15	peak
2	10806.000	35.78	13.98	49.76	74.00	-24.24	peak
3	11444.000	33.45	16.53	49.98	74.00	-24.02	peak
4	12170.000	32.07	17.75	49.82	74.00	-24.18	peak
5	13875.000	29.17	21.57	50.74	74.00	-23.26	peak
6	17846.000	25.05	25.08	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

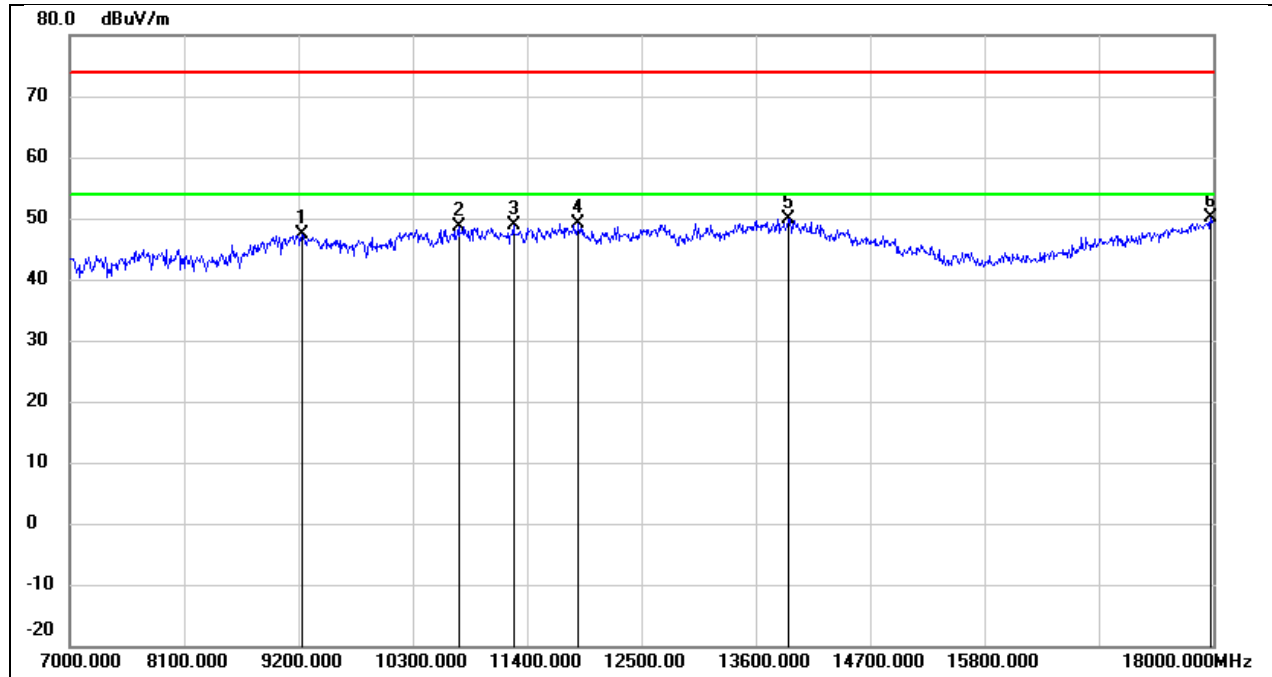


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.86	10.48	47.34	74.00	-26.66	peak
2	10740.000	34.96	13.73	48.69	74.00	-25.31	peak
3	11268.000	33.07	15.83	48.90	74.00	-25.10	peak
4	11895.000	31.57	17.51	49.08	74.00	-24.92	peak
5	13919.000	28.23	21.68	49.91	74.00	-24.09	peak
6	17978.000	24.07	25.97	50.04	74.00	-23.96	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

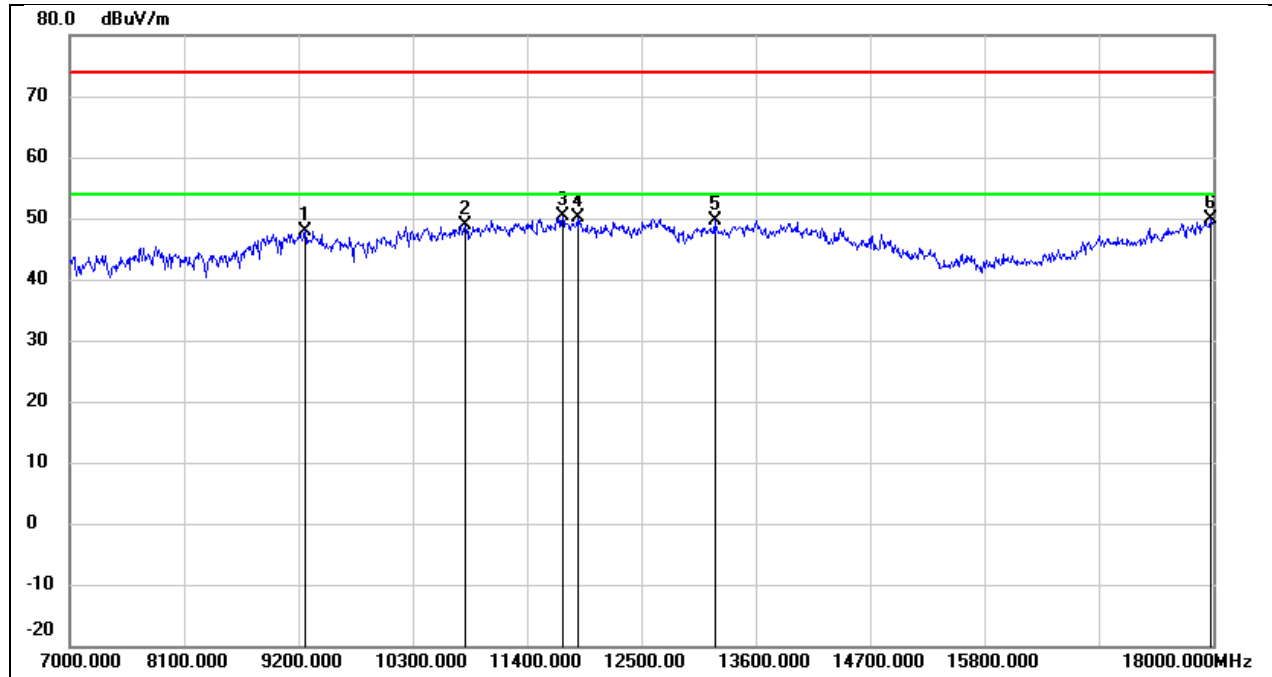


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.49	10.51	48.00	74.00	-26.00	peak
2	10806.000	34.88	13.98	48.86	74.00	-25.14	peak
3	11741.000	33.05	17.22	50.27	74.00	-23.73	peak
4	11884.000	32.56	17.48	50.04	74.00	-23.96	peak
5	13204.000	30.28	19.35	49.63	74.00	-24.37	peak
6	17978.000	23.92	25.97	49.89	74.00	-24.11	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

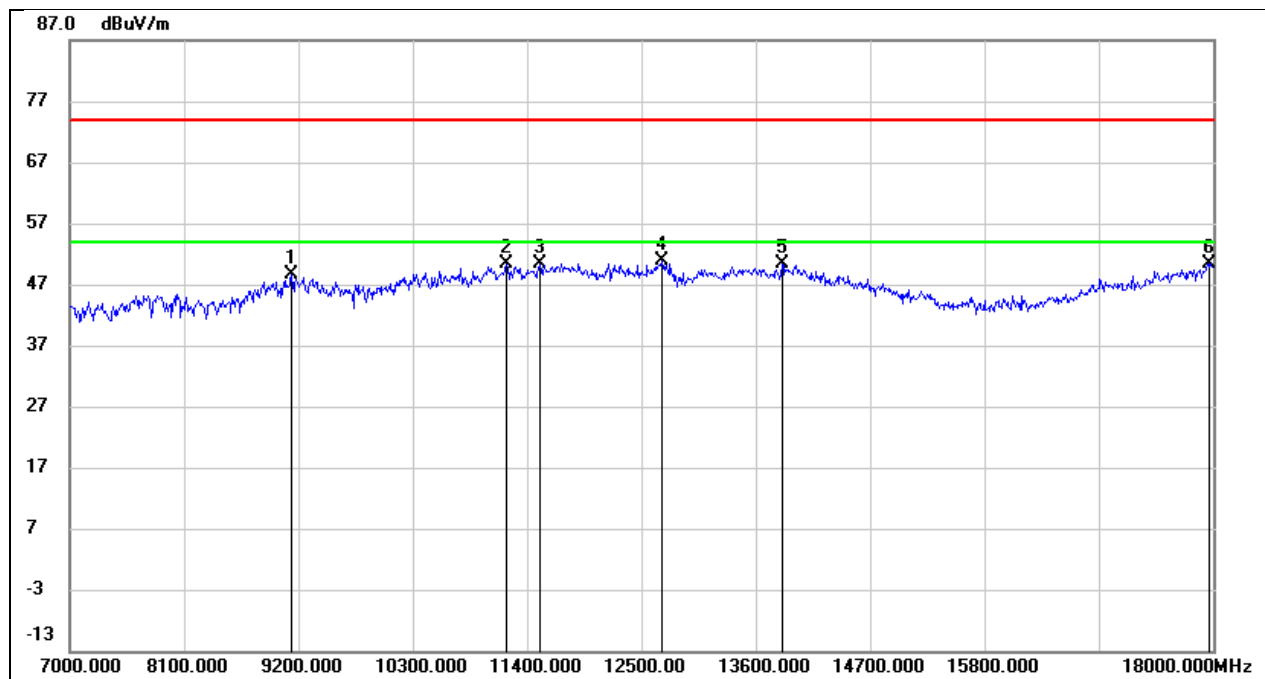


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	38.25	10.41	48.66	74.00	-25.34	peak
2	11202.000	34.74	15.55	50.29	74.00	-23.71	peak
3	11521.000	33.58	16.82	50.40	74.00	-23.60	peak
4	12698.000	32.84	18.08	50.92	74.00	-23.08	peak
5	13853.000	28.79	21.52	50.31	74.00	-23.69	peak
6	17967.000	24.60	25.89	50.49	74.00	-23.51	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

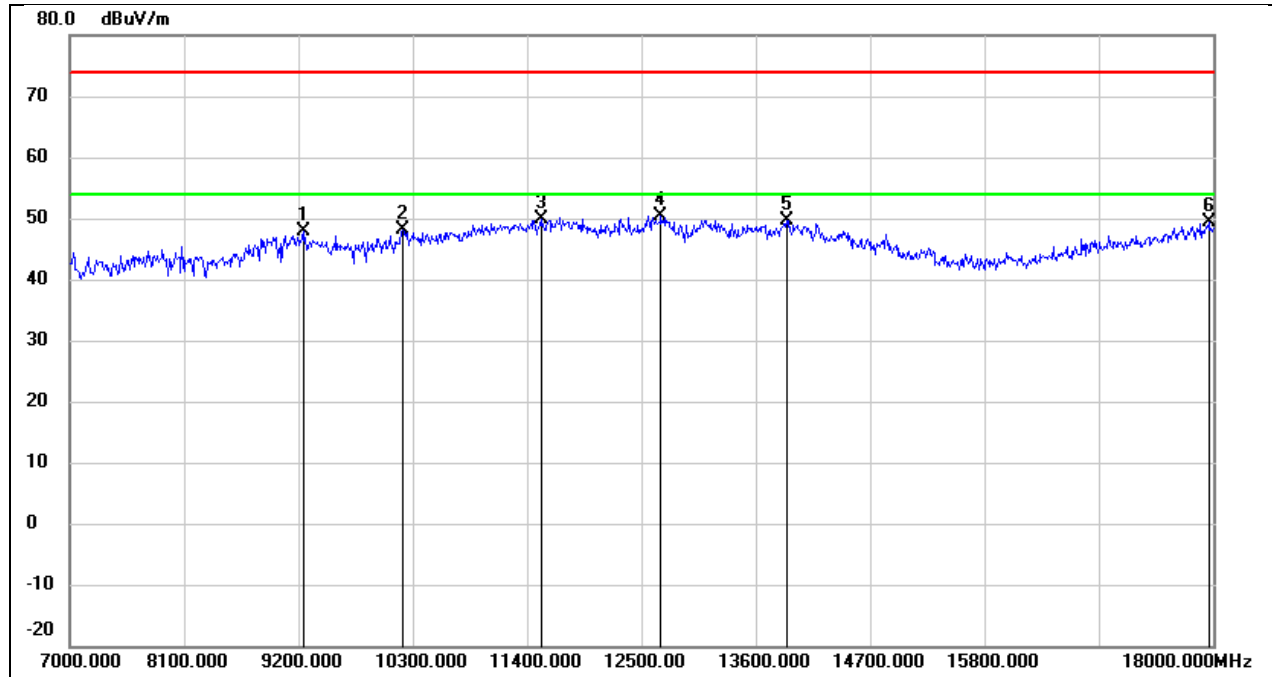


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.46	10.49	47.95	74.00	-26.05	peak
2	10201.000	35.96	12.19	48.15	74.00	-25.85	peak
3	11532.000	32.98	16.83	49.81	74.00	-24.19	peak
4	12687.000	32.37	18.05	50.42	74.00	-23.58	peak
5	13897.000	27.96	21.62	49.58	74.00	-24.42	peak
6	17956.000	23.62	25.82	49.44	74.00	-24.56	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

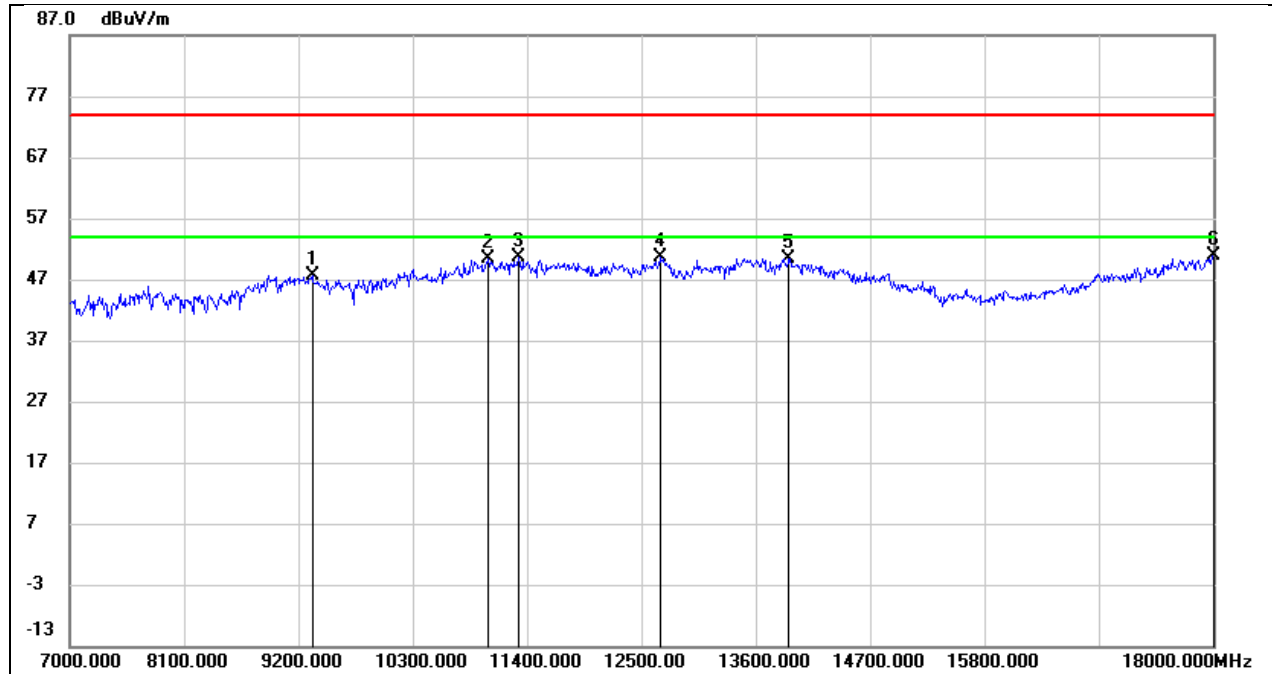


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.15	10.54	47.69	74.00	-26.31	peak
2	11026.000	35.59	14.82	50.41	74.00	-23.59	peak
3	11323.000	34.51	16.05	50.56	74.00	-23.44	peak
4	12676.000	32.63	18.05	50.68	74.00	-23.32	peak
5	13919.000	28.75	21.68	50.43	74.00	-23.57	peak
6	18000.000	24.80	26.12	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

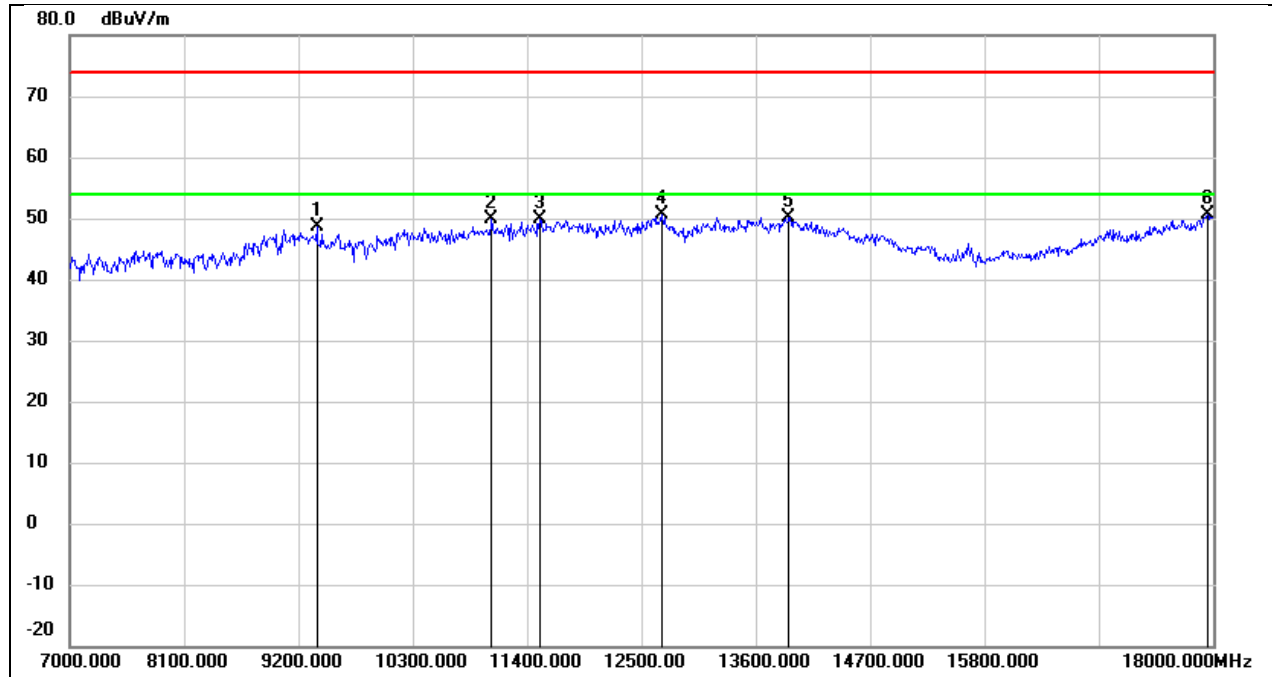


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	38.00	10.58	48.58	74.00	-25.42	peak
2	11059.000	34.80	14.96	49.76	74.00	-24.24	peak
3	11521.000	33.16	16.82	49.98	74.00	-24.02	peak
4	12698.000	32.62	18.08	50.70	74.00	-23.30	peak
5	13919.000	28.56	21.68	50.24	74.00	-23.76	peak
6	17945.000	24.87	25.75	50.62	74.00	-23.38	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

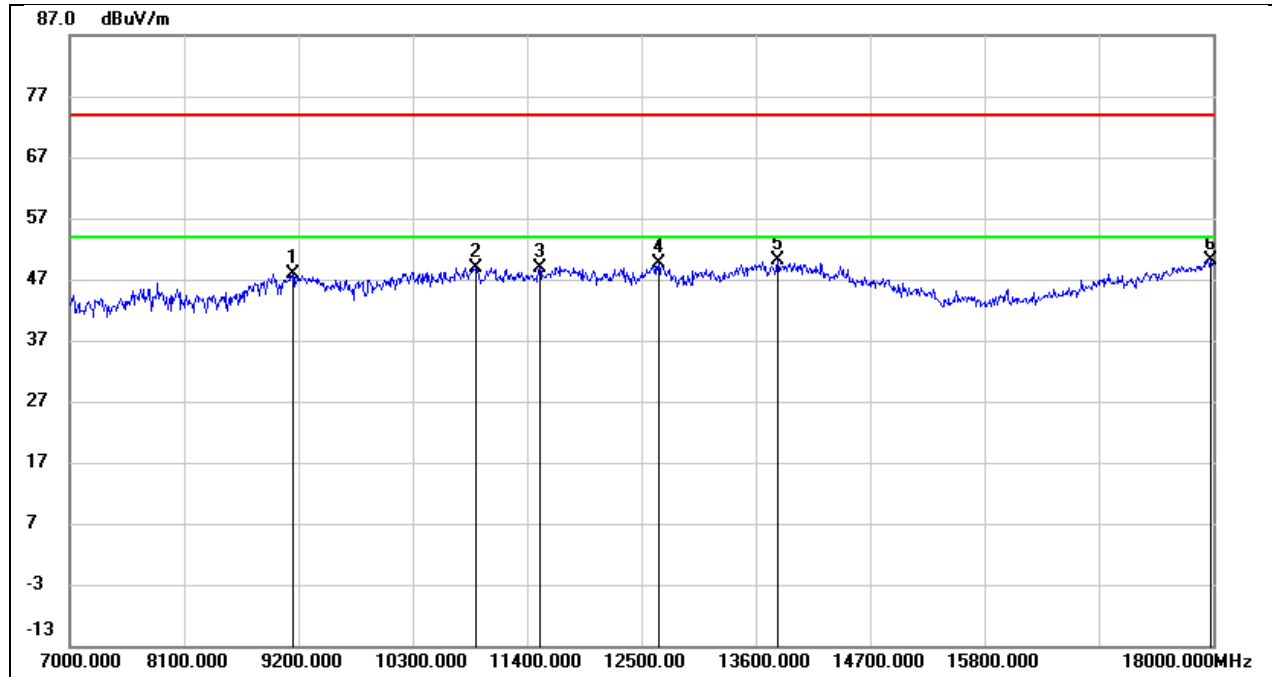


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.52	10.43	47.95	74.00	-26.05	peak
2	10905.000	34.54	14.36	48.90	74.00	-25.10	peak
3	11521.000	32.10	16.82	48.92	74.00	-25.08	peak
4	12665.000	31.56	18.04	49.60	74.00	-24.40	peak
5	13809.000	28.70	21.41	50.11	74.00	-23.89	peak
6	17978.000	24.26	25.97	50.23	74.00	-23.77	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

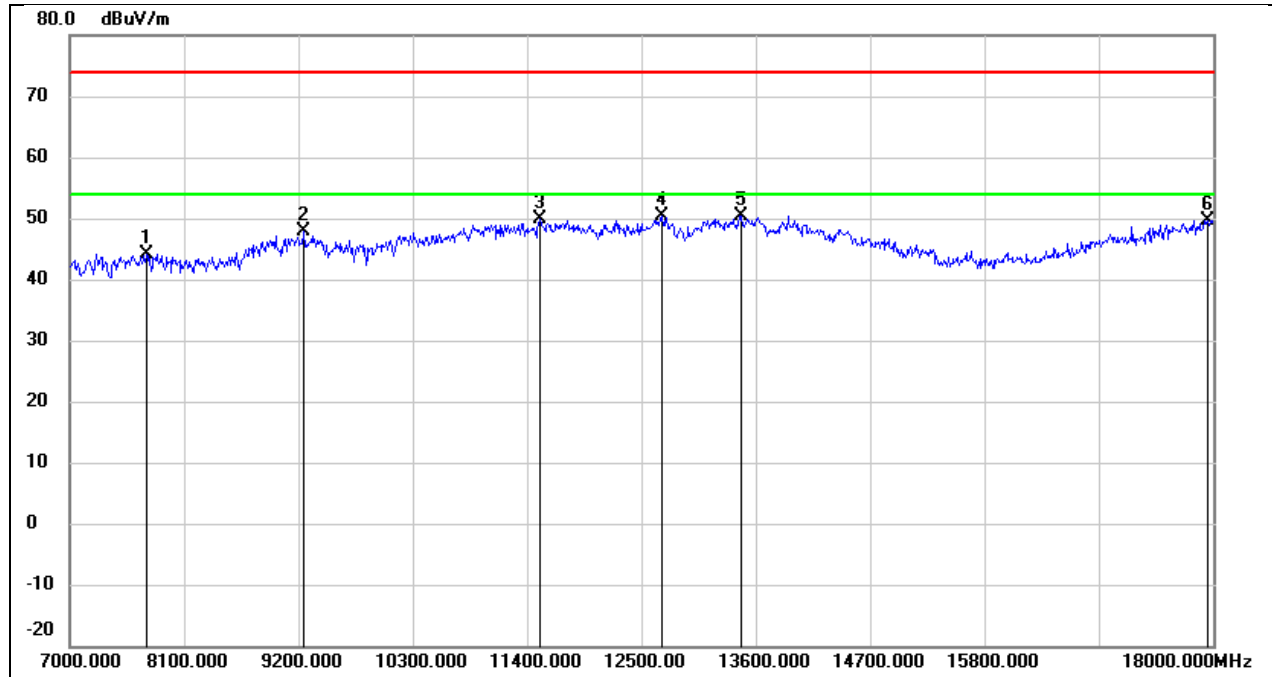


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7737.000	37.48	6.66	44.14	74.00	-29.86	peak
2	9255.000	37.36	10.51	47.87	74.00	-26.13	peak
3	11521.000	33.06	16.82	49.88	74.00	-24.12	peak
4	12698.000	32.35	18.08	50.43	74.00	-23.57	peak
5	13457.000	30.00	20.46	50.46	74.00	-23.54	peak
6	17945.000	24.00	25.75	49.75	74.00	-24.25	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

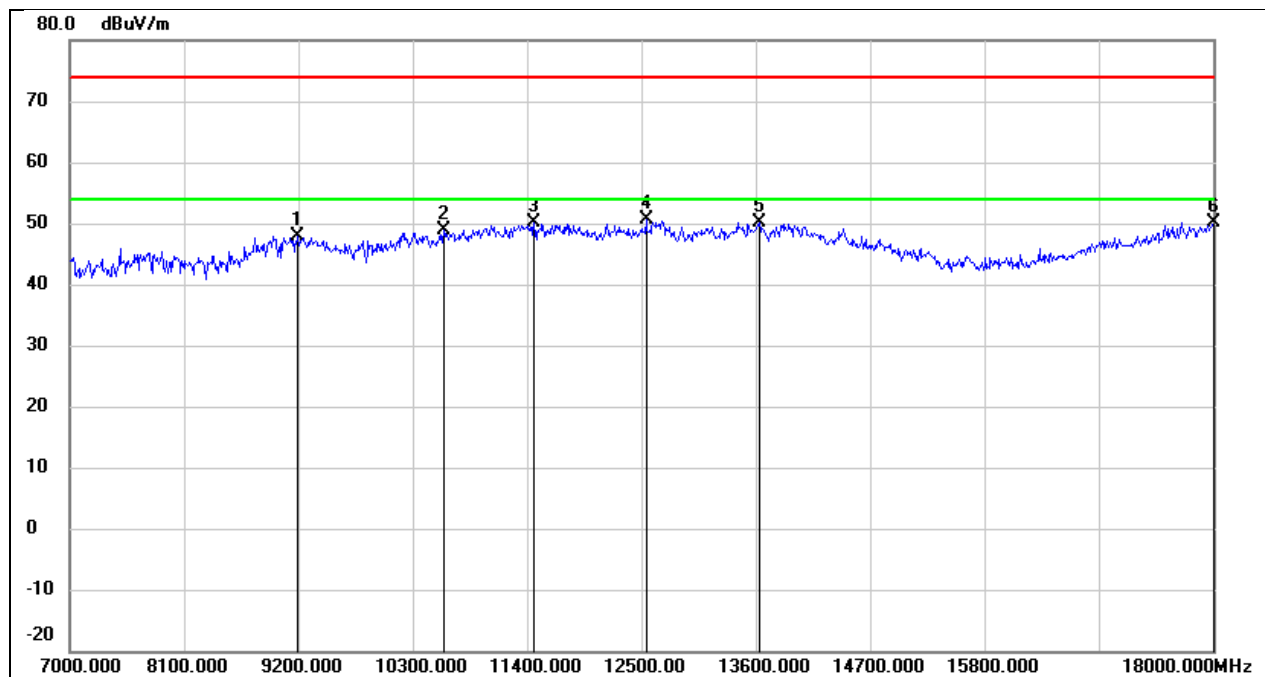


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.39	10.46	47.85	74.00	-26.15	peak
2	10597.000	35.57	13.19	48.76	74.00	-25.24	peak
3	11466.000	33.44	16.63	50.07	74.00	-23.93	peak
4	12544.000	32.74	17.88	50.62	74.00	-23.38	peak
5	13633.000	29.24	20.97	50.21	74.00	-23.79	peak
6	18000.000	24.10	26.12	50.22	74.00	-23.78	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

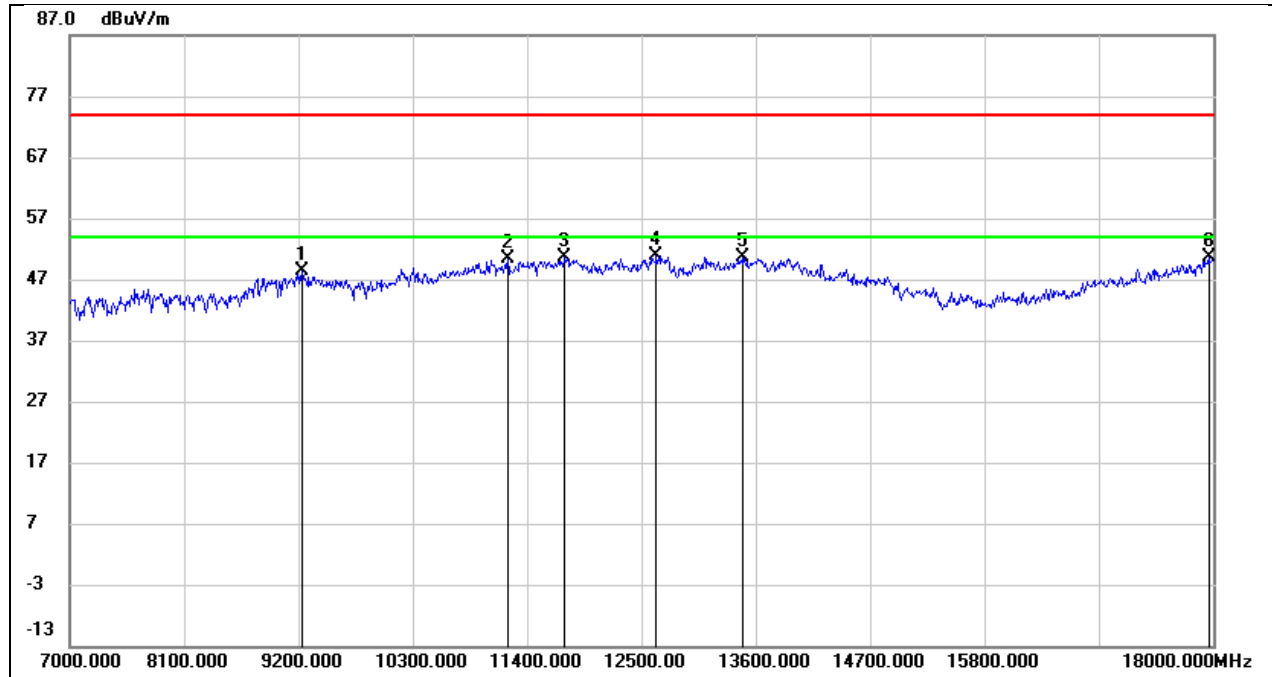


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.79	10.48	48.27	74.00	-25.73	peak
2	11213.000	34.81	15.59	50.40	74.00	-23.60	peak
3	11763.000	33.37	17.26	50.63	74.00	-23.37	peak
4	12643.000	32.85	18.01	50.86	74.00	-23.14	peak
5	13468.000	30.06	20.50	50.56	74.00	-23.44	peak
6	17956.000	24.79	25.82	50.61	74.00	-23.39	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

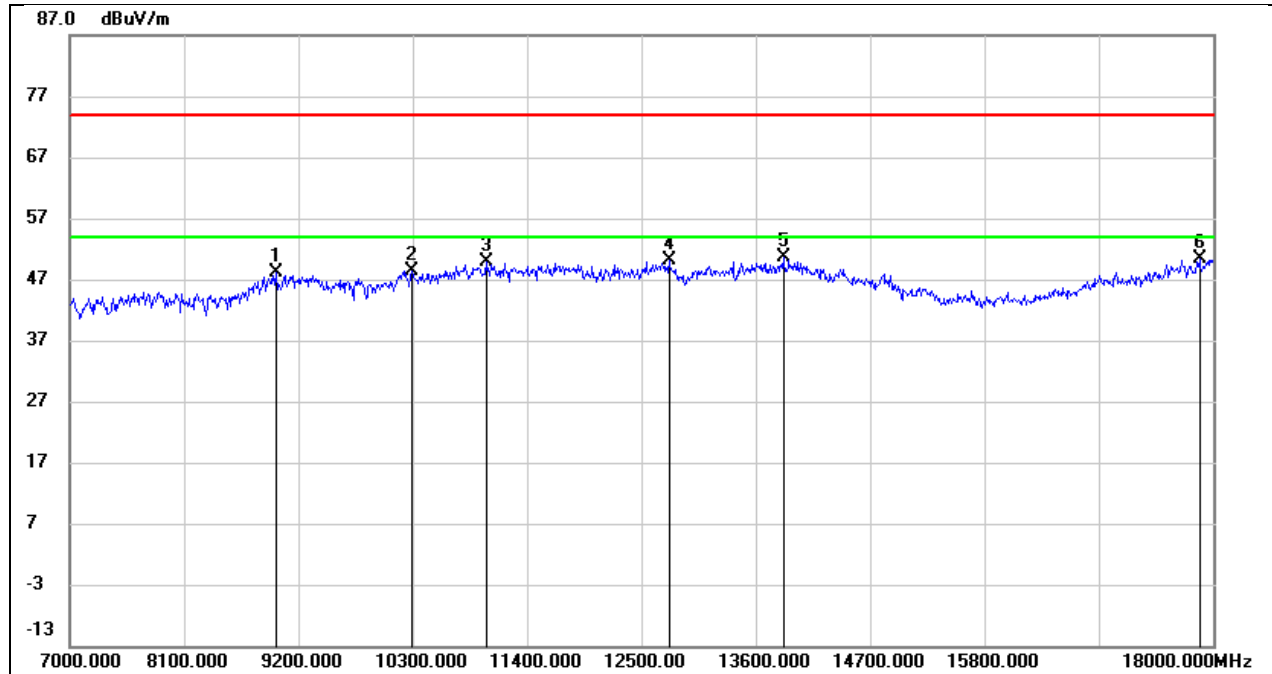

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.88	10.21	48.09	74.00	-25.91	peak
2	10289.000	36.07	12.38	48.45	74.00	-25.55	peak
3	11004.000	35.03	14.74	49.77	74.00	-24.23	peak
4	12764.000	31.89	18.16	50.05	74.00	-23.95	peak
5	13864.000	29.04	21.53	50.57	74.00	-23.43	peak
6	17868.000	25.10	25.22	50.32	74.00	-23.68	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

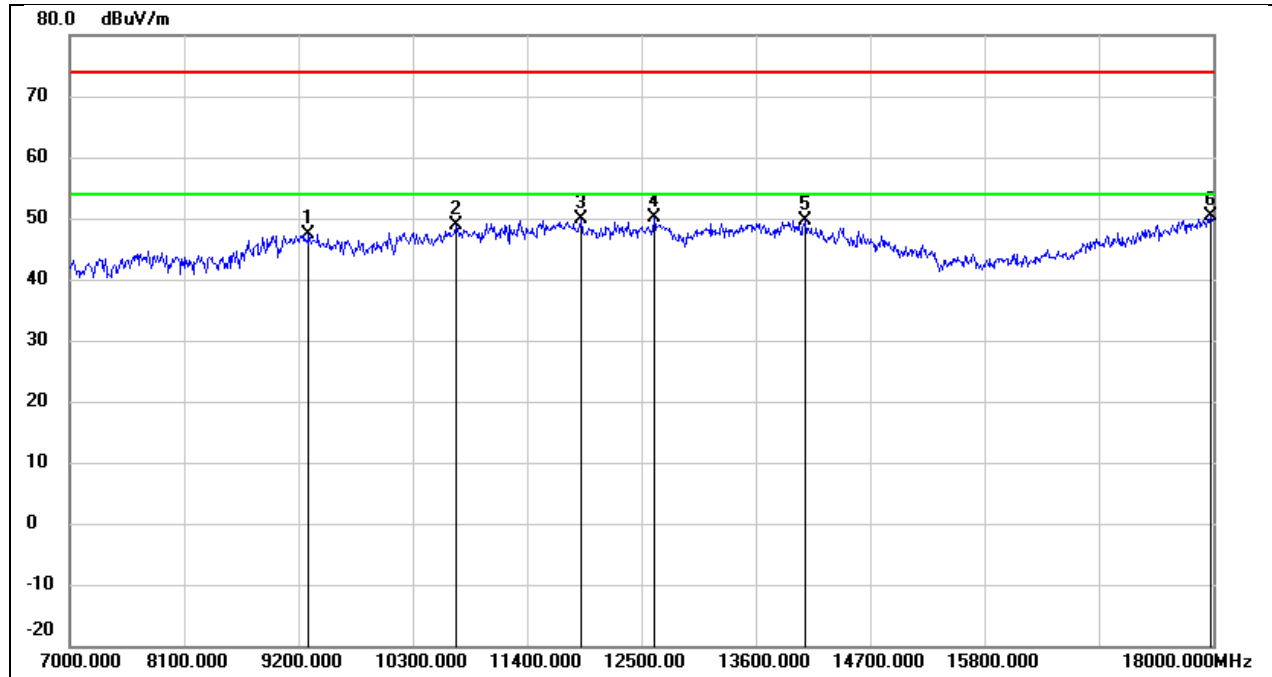


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	36.96	10.53	47.49	74.00	-26.51	peak
2	10718.000	35.18	13.66	48.84	74.00	-25.16	peak
3	11917.000	32.30	17.54	49.84	74.00	-24.16	peak
4	12621.000	32.26	17.98	50.24	74.00	-23.76	peak
5	14073.000	28.06	21.57	49.63	74.00	-24.37	peak
6	17978.000	24.35	25.97	50.32	74.00	-23.68	peak

8.6. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)


For ISD UNII-1

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

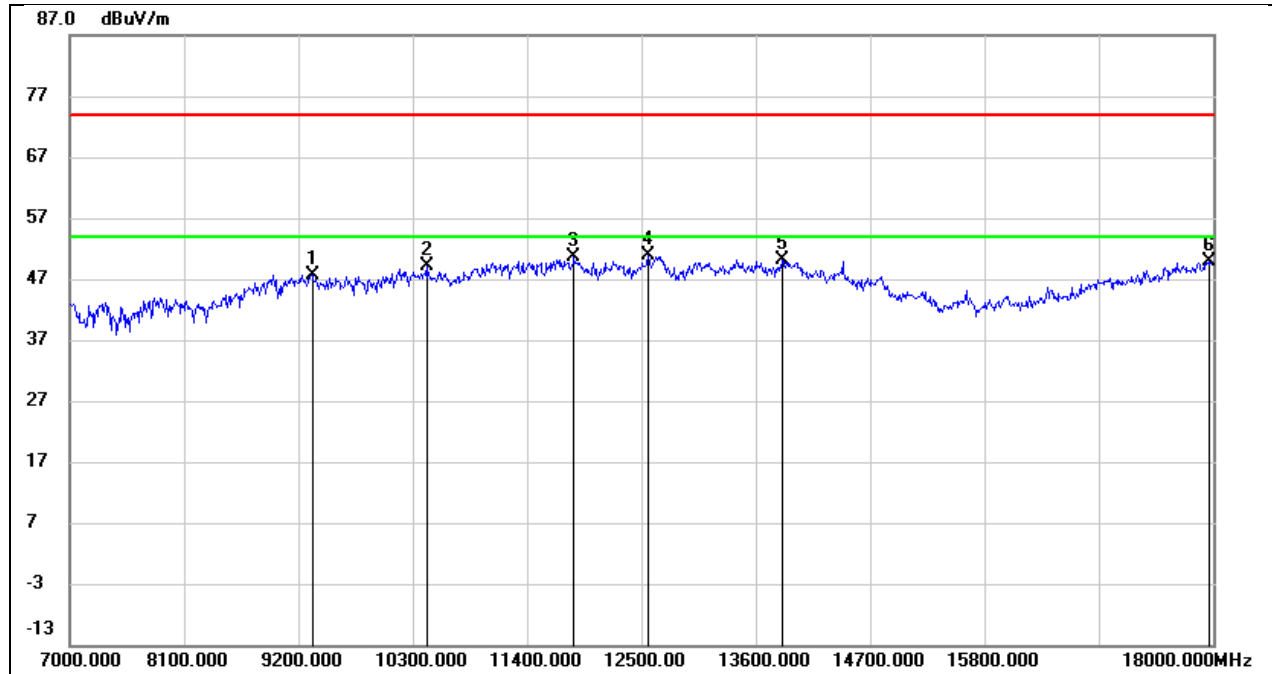


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.19	10.54	47.73	74.00	-26.27	peak
2	10432.000	36.38	12.67	49.05	74.00	-24.95	peak
3	11851.000	33.32	17.43	50.75	74.00	-23.25	peak
4	12566.000	32.98	17.91	50.89	74.00	-23.11	peak
5	13853.000	28.53	21.52	50.05	74.00	-23.95	peak
6	17967.000	24.03	25.89	49.92	74.00	-24.08	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

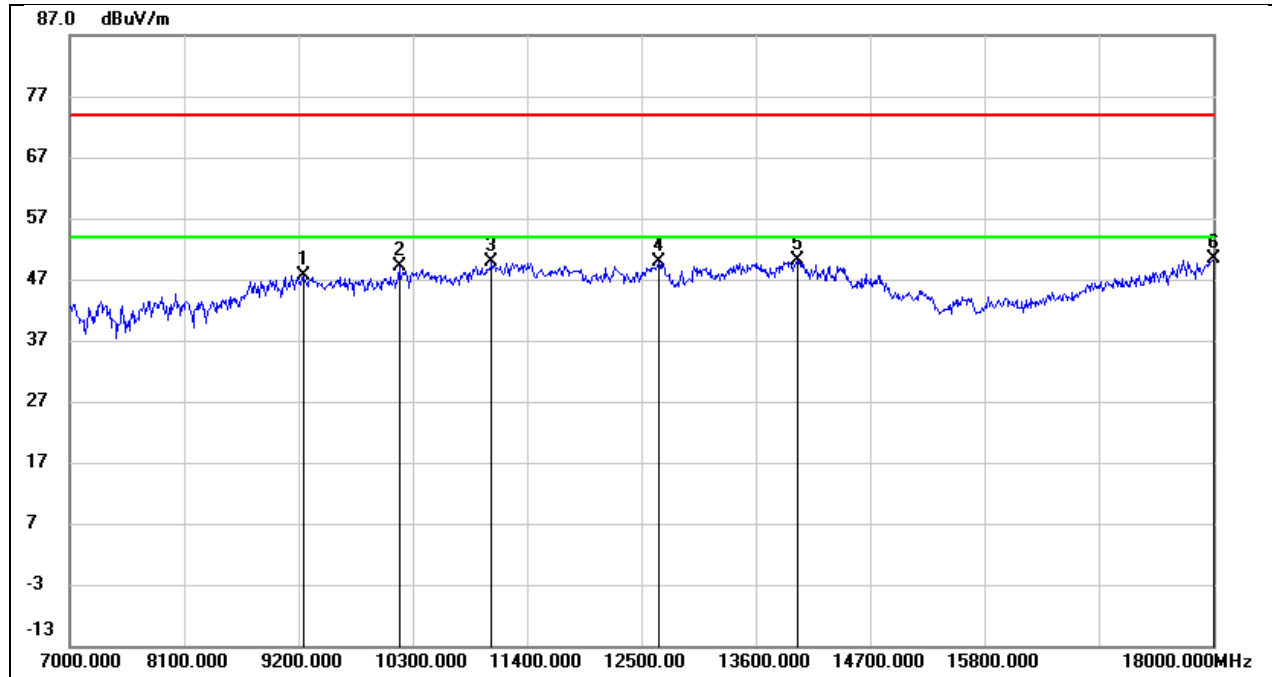


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.09	10.51	47.60	74.00	-26.40	peak
2	10168.000	36.96	12.13	49.09	74.00	-24.91	peak
3	11059.000	35.00	14.96	49.96	74.00	-24.04	peak
4	12665.000	31.78	18.04	49.82	74.00	-24.18	peak
5	13996.000	28.25	21.87	50.12	74.00	-23.88	peak
6	18000.000	24.14	26.12	50.26	74.00	-23.74	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

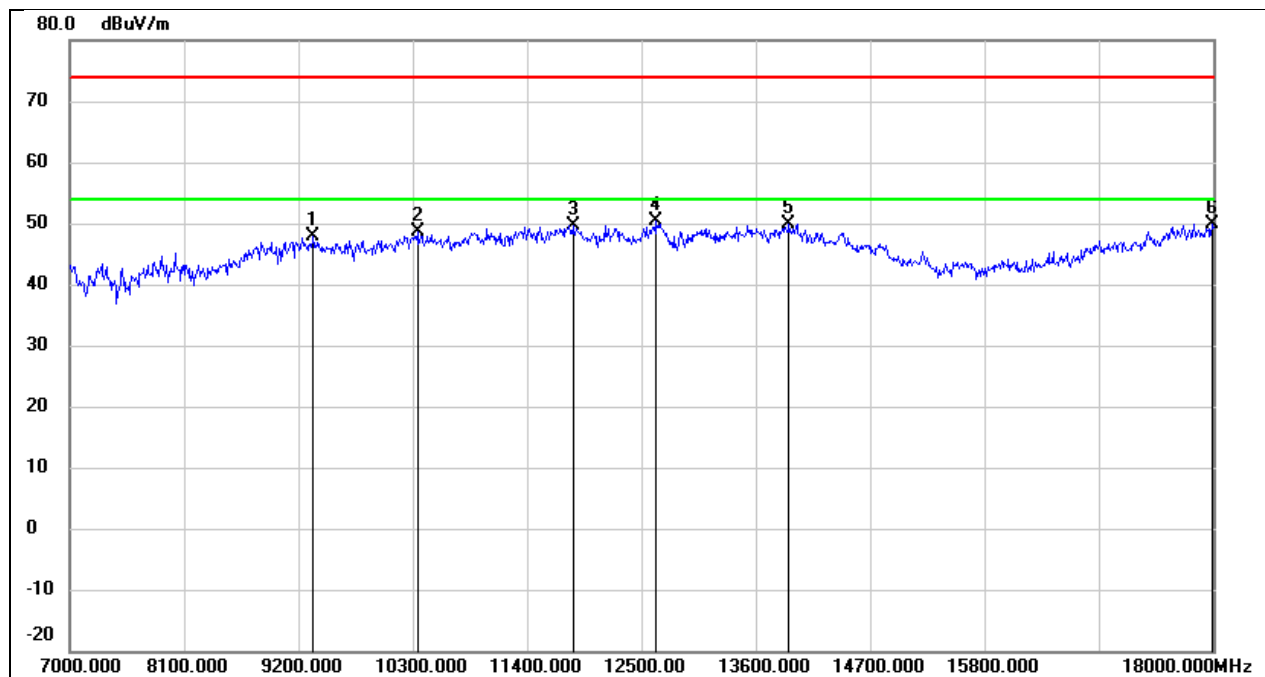


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.44	10.55	47.99	74.00	-26.01	peak
2	10344.000	36.07	12.49	48.56	74.00	-25.44	peak
3	11840.000	32.16	17.40	49.56	74.00	-24.44	peak
4	12643.000	32.37	18.01	50.38	74.00	-23.62	peak
5	13919.000	28.15	21.68	49.83	74.00	-24.17	peak
6	17989.000	23.89	26.04	49.93	74.00	-24.07	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

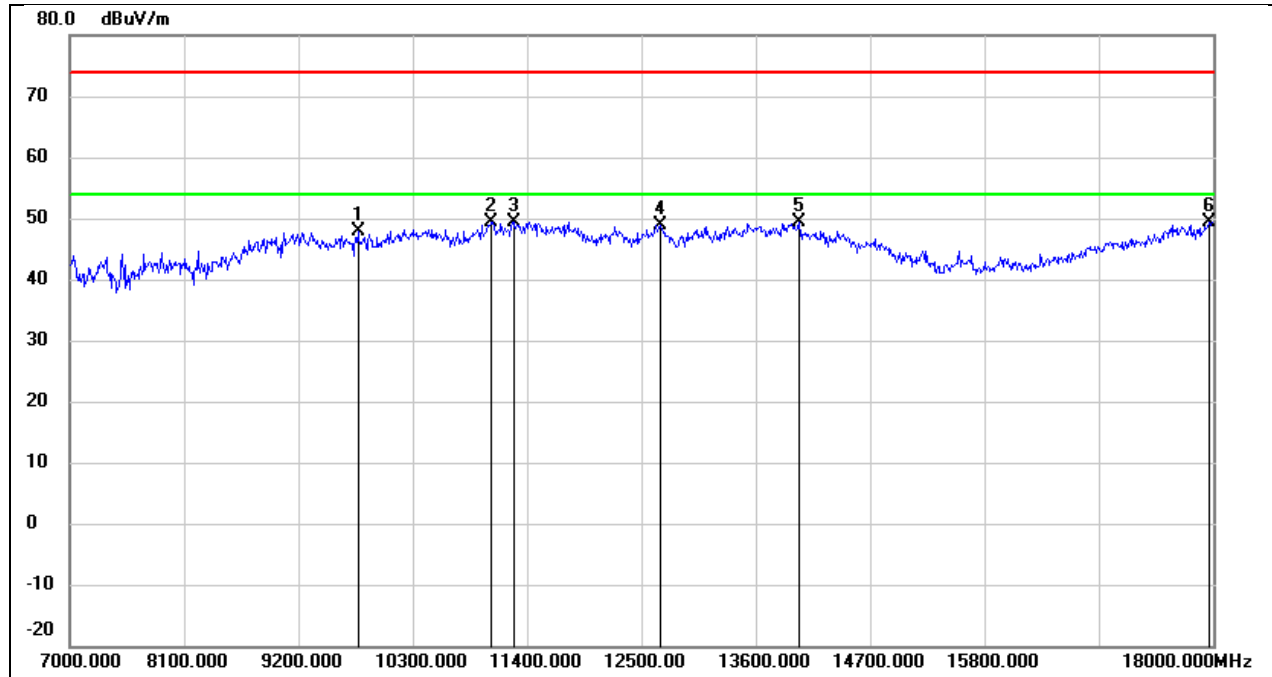


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9772.000	36.74	11.26	48.00	74.00	-26.00	peak
2	11059.000	34.46	14.96	49.42	74.00	-24.58	peak
3	11268.000	33.63	15.83	49.46	74.00	-24.54	peak
4	12676.000	30.80	18.05	48.85	74.00	-25.15	peak
5	14018.000	27.46	21.80	49.26	74.00	-24.74	peak
6	17967.000	23.58	25.89	49.47	74.00	-24.53	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

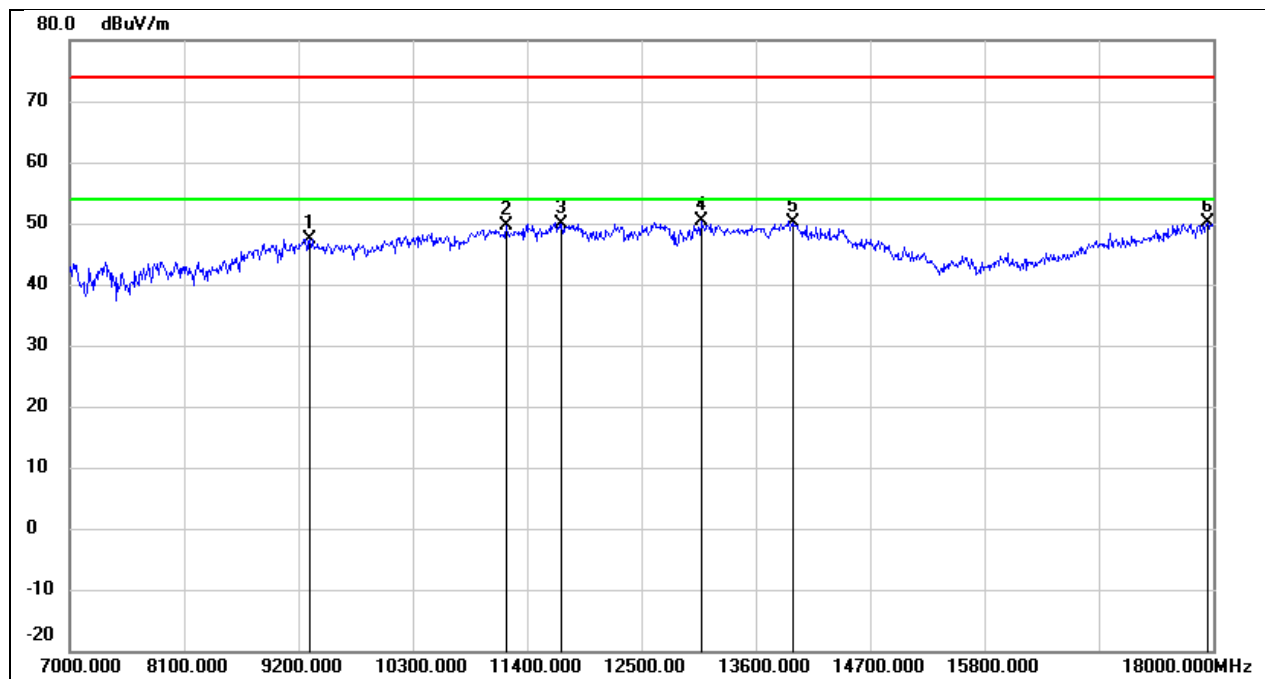


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	36.94	10.54	47.48	74.00	-26.52	peak
2	11202.000	33.96	15.55	49.51	74.00	-24.49	peak
3	11730.000	32.80	17.19	49.99	74.00	-24.01	peak
4	13072.000	31.57	18.77	50.34	74.00	-23.66	peak
5	13963.000	28.31	21.78	50.09	74.00	-23.91	peak
6	17945.000	24.48	25.75	50.23	74.00	-23.77	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

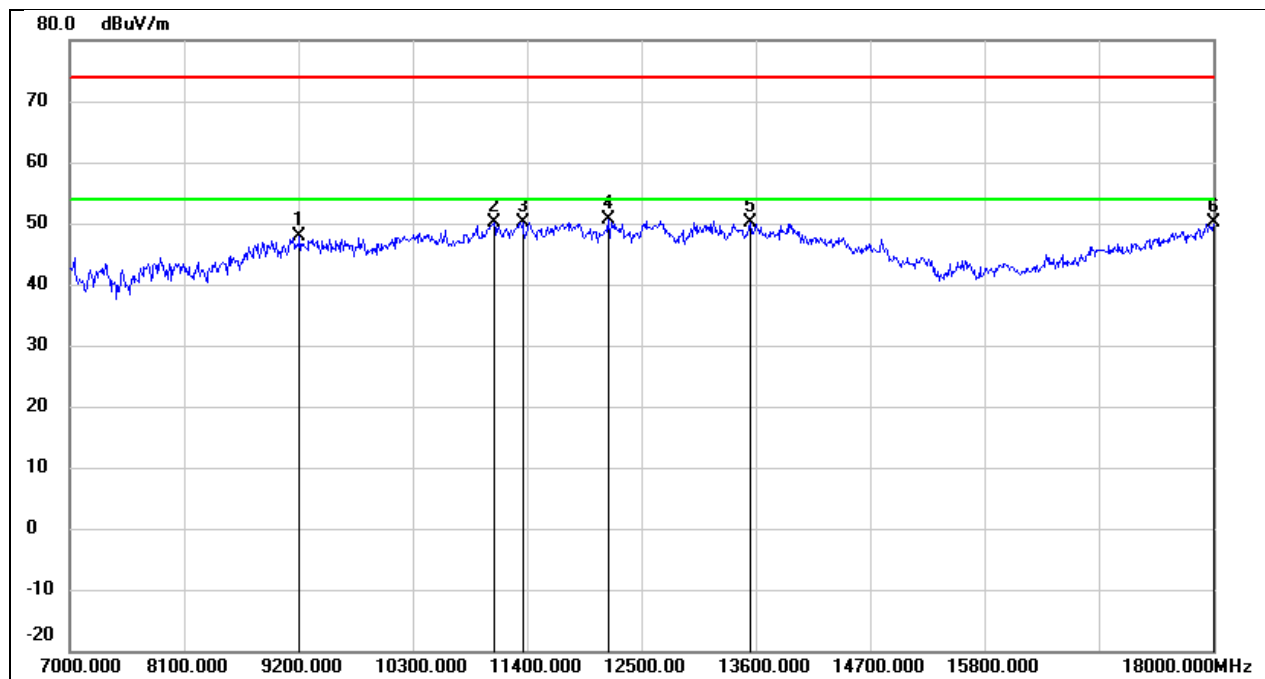


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.39	10.47	47.86	74.00	-26.14	peak
2	11081.000	35.15	15.05	50.20	74.00	-23.80	peak
3	11356.000	34.06	16.19	50.25	74.00	-23.75	peak
4	12181.000	32.81	17.75	50.56	74.00	-23.44	peak
5	13545.000	29.41	20.74	50.15	74.00	-23.85	peak
6	18000.000	24.06	26.12	50.18	74.00	-23.82	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

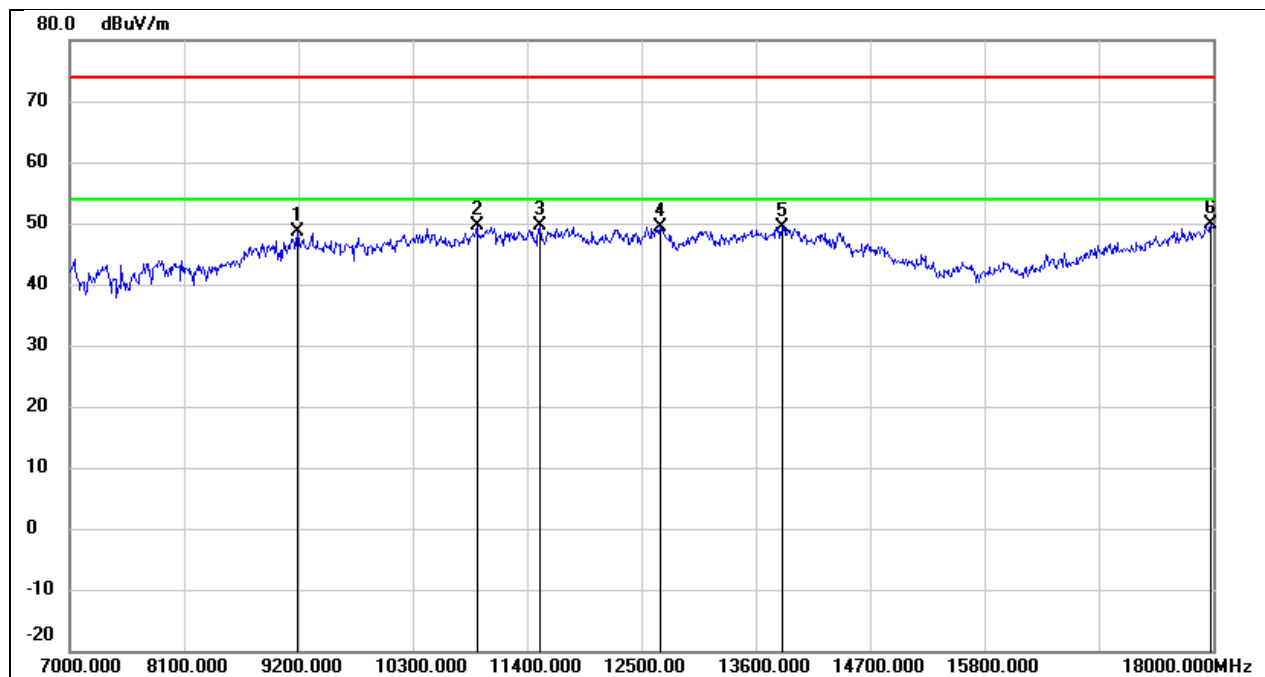


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	38.05	10.46	48.51	74.00	-25.49	peak
2	10916.000	35.21	14.39	49.60	74.00	-24.40	peak
3	11521.000	32.80	16.82	49.62	74.00	-24.38	peak
4	12676.000	31.40	18.05	49.45	74.00	-24.55	peak
5	13853.000	27.92	21.52	49.44	74.00	-24.56	peak
6	17978.000	24.03	25.97	50.00	74.00	-24.00	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

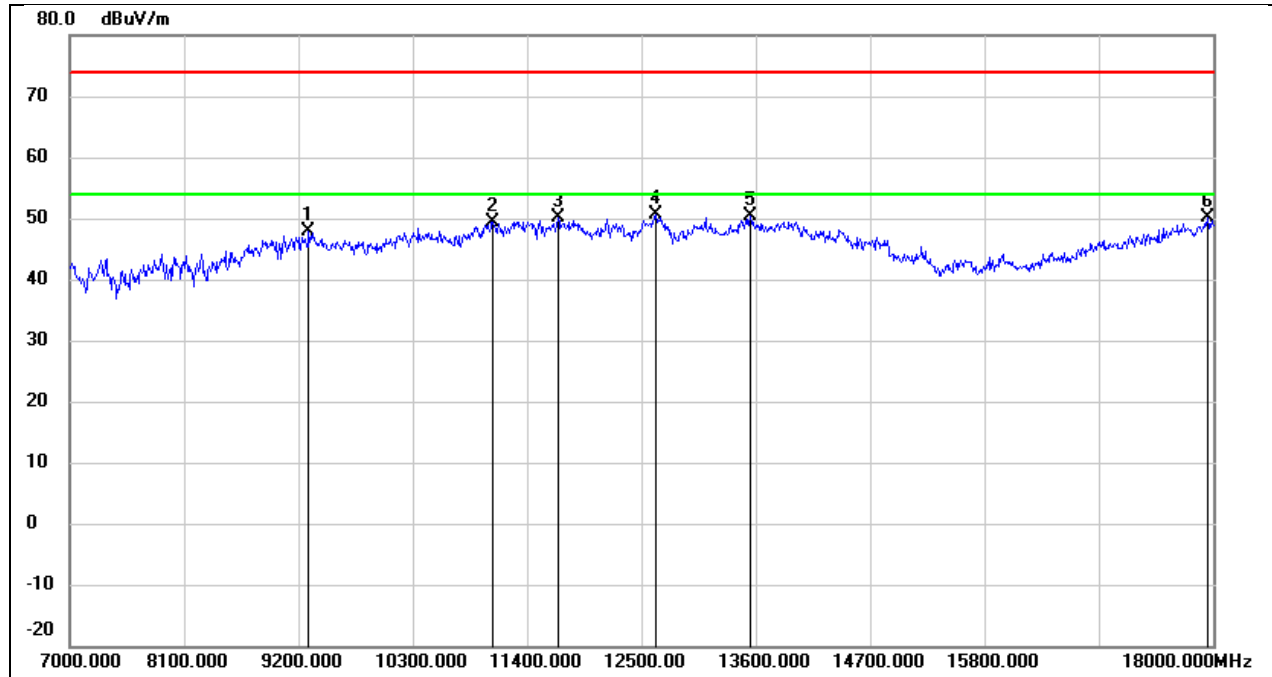


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.31	10.53	47.84	74.00	-26.16	peak
2	11070.000	34.34	15.01	49.35	74.00	-24.65	peak
3	11697.000	33.12	17.13	50.25	74.00	-23.75	peak
4	12643.000	32.68	18.01	50.69	74.00	-23.31	peak
5	13545.000	29.55	20.75	50.30	74.00	-23.70	peak
6	17945.000	24.27	25.75	50.02	74.00	-23.98	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

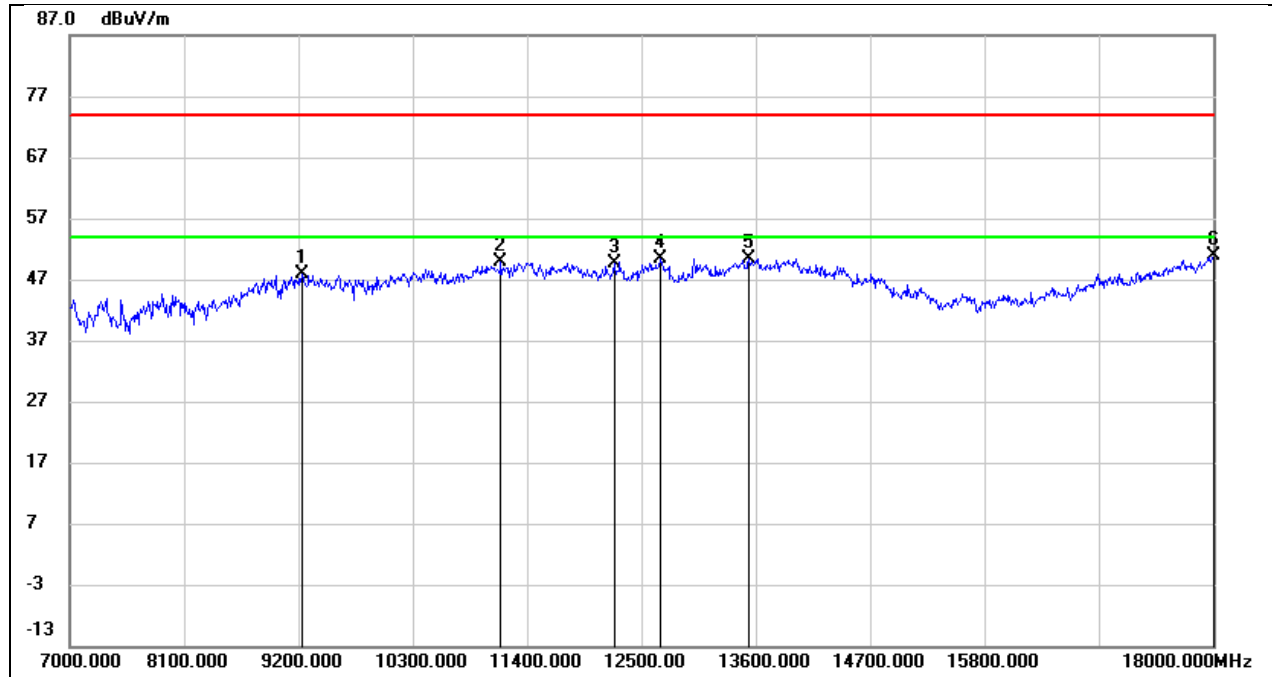


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.37	10.48	47.85	74.00	-26.15	peak
2	11147.000	34.53	15.32	49.85	74.00	-24.15	peak
3	12236.000	31.97	17.76	49.73	74.00	-24.27	peak
4	12687.000	32.29	18.05	50.34	74.00	-23.66	peak
5	13534.000	29.65	20.73	50.38	74.00	-23.62	peak
6	18000.000	24.76	26.12	50.88	74.00	-23.12	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

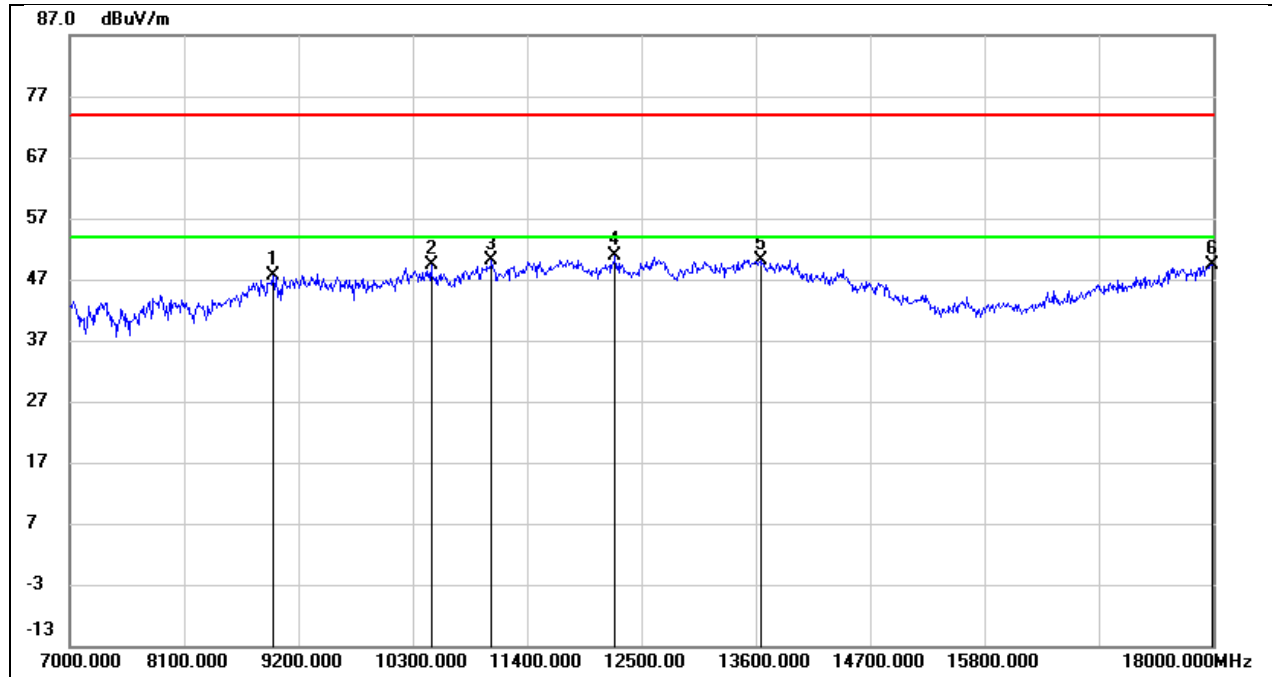


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.47	10.05	47.52	74.00	-26.48	peak
2	10476.000	36.71	12.77	49.48	74.00	-24.52	peak
3	11059.000	35.06	14.96	50.02	74.00	-23.98	peak
4	12247.000	33.13	17.77	50.90	74.00	-23.10	peak
5	13644.000	29.14	20.99	50.13	74.00	-23.87	peak
6	17989.000	23.34	26.04	49.38	74.00	-24.62	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

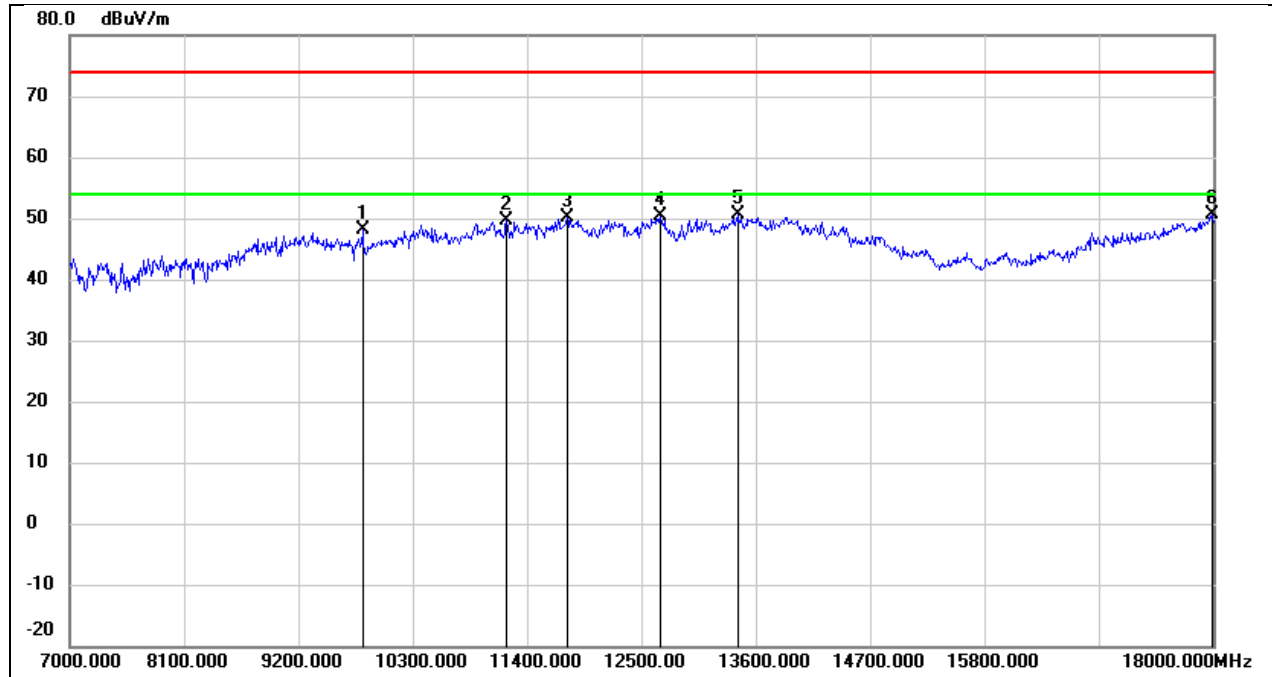


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9816.000	36.66	11.37	48.03	74.00	-25.97	peak
2	11202.000	34.08	15.55	49.63	74.00	-24.37	peak
3	11785.000	32.91	17.30	50.21	74.00	-23.79	peak
4	12676.000	32.25	18.05	50.30	74.00	-23.70	peak
5	13424.000	30.35	20.30	50.65	74.00	-23.35	peak
6	17989.000	24.62	26.04	50.66	74.00	-23.34	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

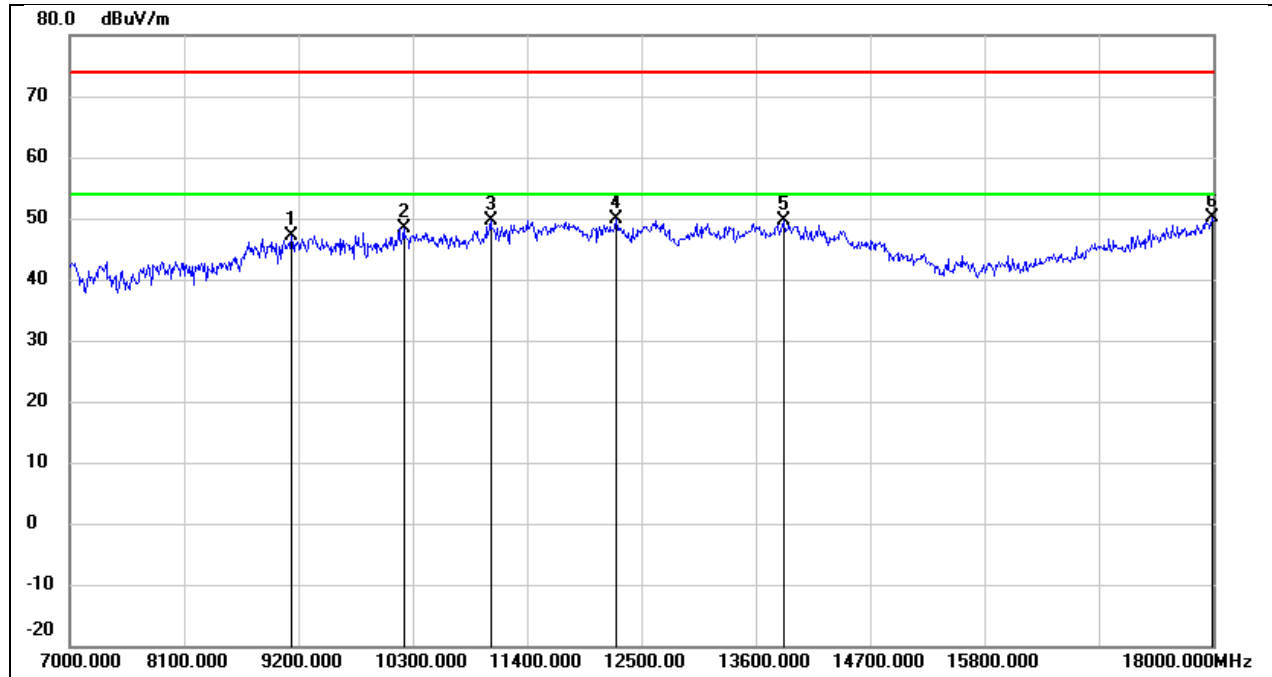


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.75	10.41	47.16	74.00	-26.84	peak
2	10212.000	36.16	12.21	48.37	74.00	-25.63	peak
3	11048.000	34.67	14.91	49.58	74.00	-24.42	peak
4	12258.000	31.99	17.77	49.76	74.00	-24.24	peak
5	13864.000	28.03	21.53	49.56	74.00	-24.44	peak
6	17989.000	24.20	26.04	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

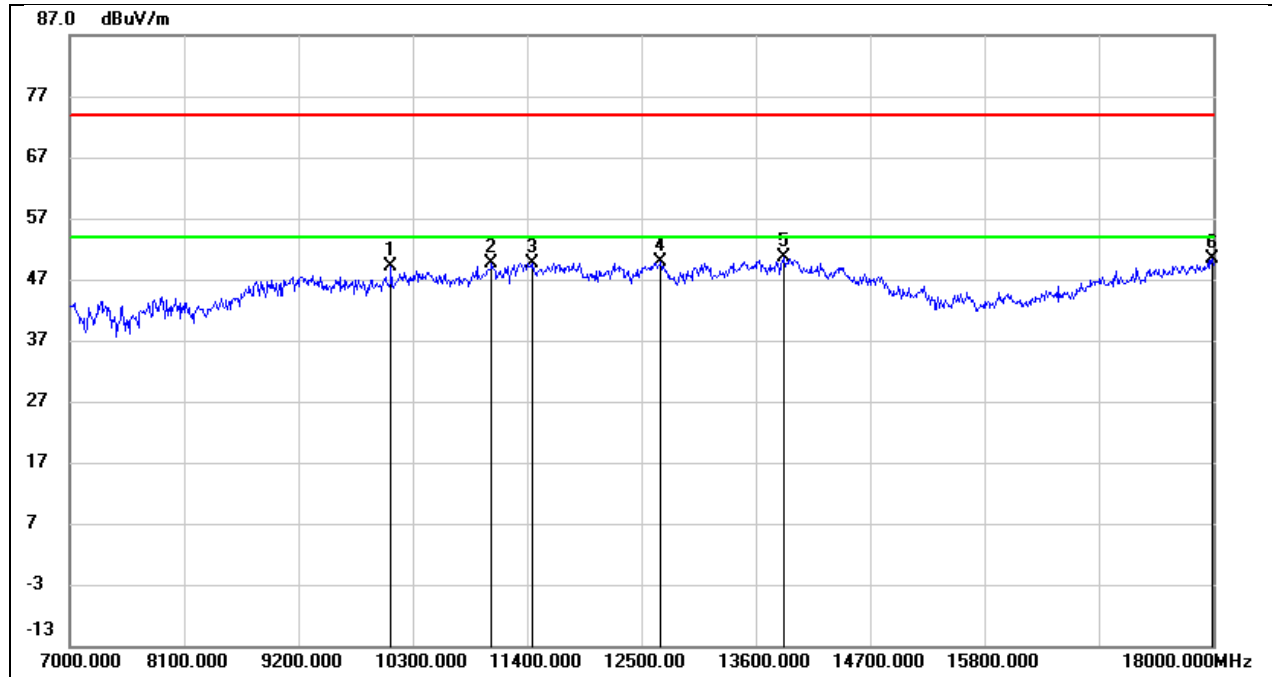


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10091.000	37.05	11.97	49.02	74.00	-24.98	peak
2	11059.000	34.63	14.96	49.59	74.00	-24.41	peak
3	11444.000	33.11	16.53	49.64	74.00	-24.36	peak
4	12687.000	31.77	18.05	49.82	74.00	-24.18	peak
5	13875.000	29.05	21.57	50.62	74.00	-23.38	peak
6	17989.000	24.36	26.04	50.40	74.00	-23.60	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

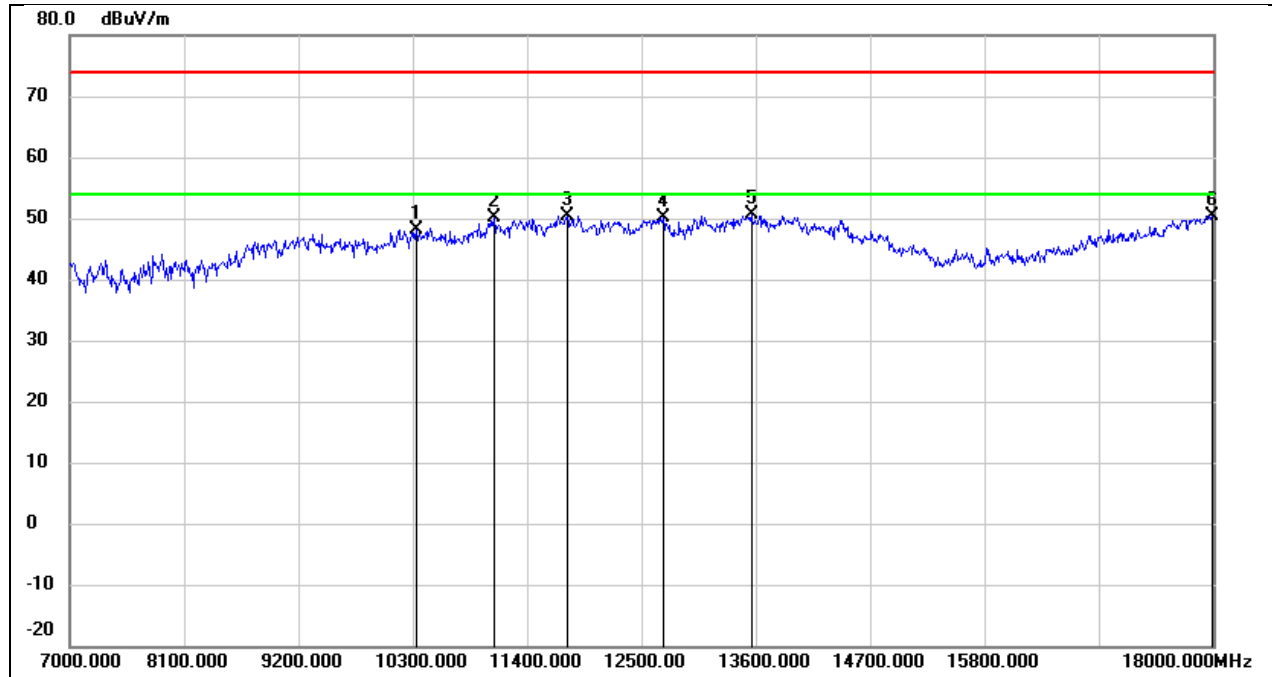


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10333.000	35.76	12.47	48.23	74.00	-25.77	peak
2	11081.000	35.19	15.05	50.24	74.00	-23.76	peak
3	11785.000	33.06	17.30	50.36	74.00	-23.64	peak
4	12709.000	32.11	18.09	50.20	74.00	-23.80	peak
5	13556.000	29.73	20.78	50.51	74.00	-23.49	peak
6	17989.000	24.45	26.04	50.49	74.00	-23.51	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

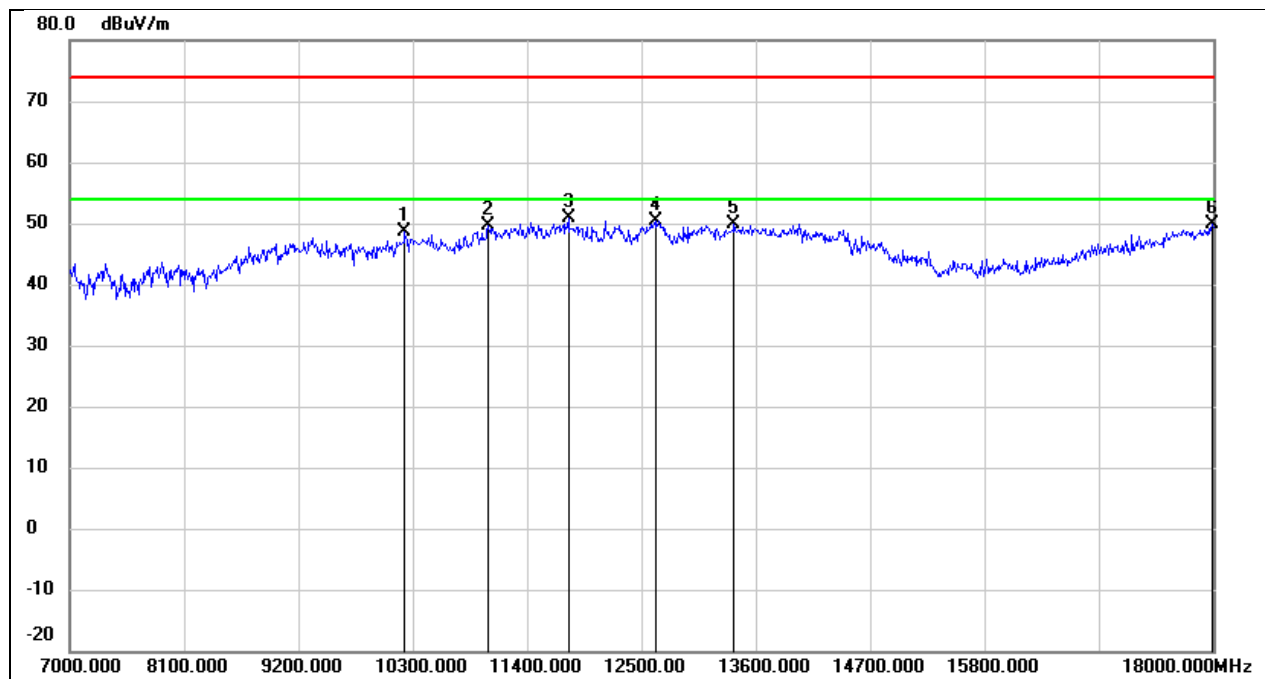


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10223.000	36.39	12.24	48.63	74.00	-25.37	peak
2	11026.000	34.78	14.82	49.60	74.00	-24.40	peak
3	11796.000	33.49	17.32	50.81	74.00	-23.19	peak
4	12632.000	32.49	17.99	50.48	74.00	-23.52	peak
5	13391.000	29.79	20.16	49.95	74.00	-24.05	peak
6	17989.000	23.72	26.04	49.76	74.00	-24.24	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

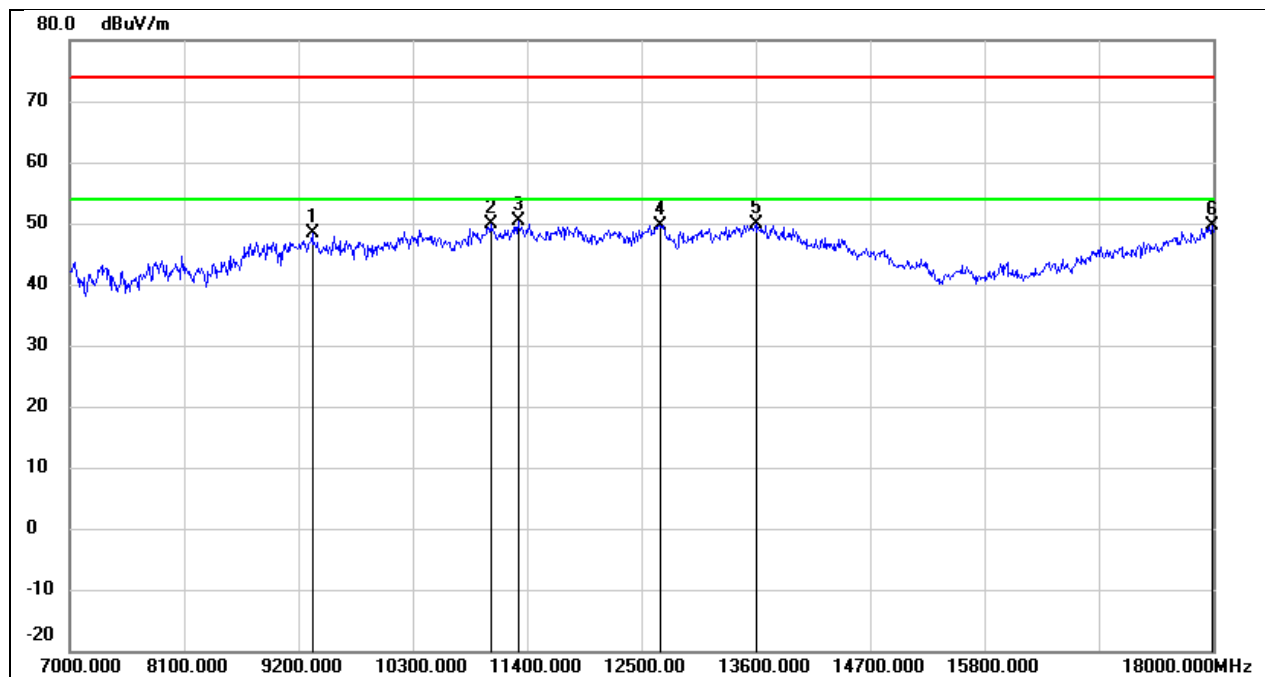


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.81	10.54	48.35	74.00	-25.65	peak
2	11048.000	35.08	14.91	49.99	74.00	-24.01	peak
3	11312.000	34.32	16.00	50.32	74.00	-23.68	peak
4	12687.000	31.67	18.05	49.72	74.00	-24.28	peak
5	13600.000	29.06	20.89	49.95	74.00	-24.05	peak
6	17989.000	23.62	26.04	49.66	74.00	-24.34	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

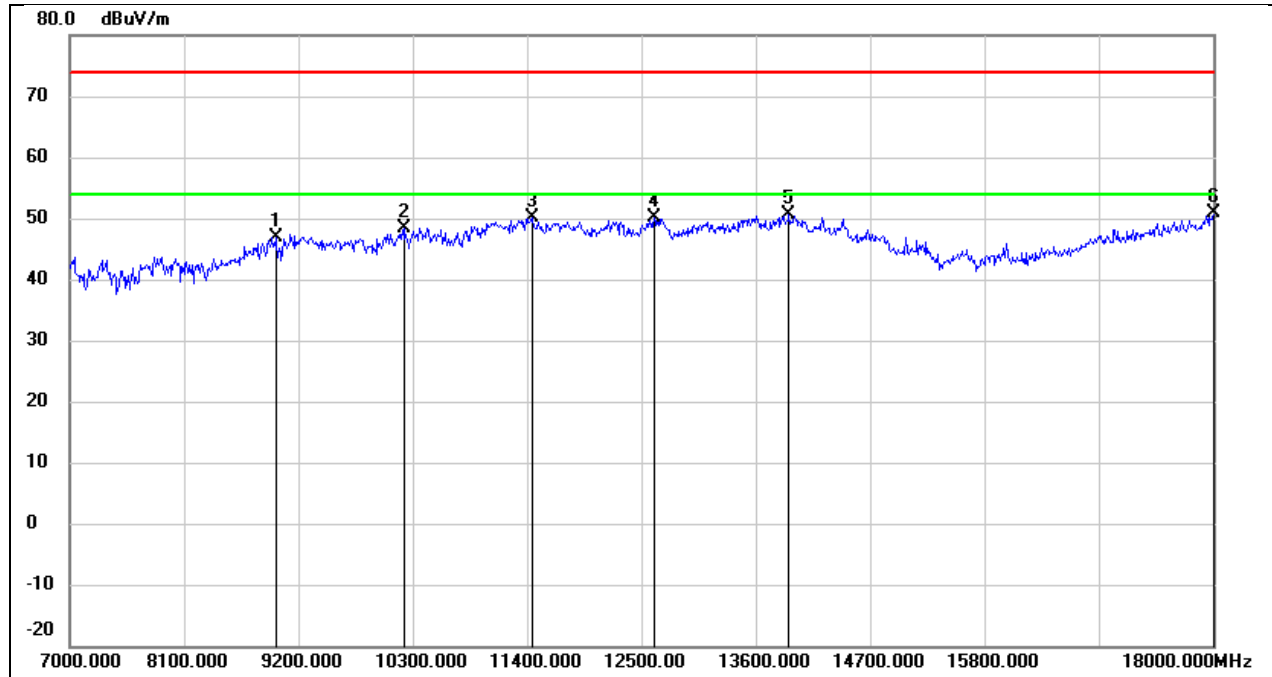


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	36.73	10.21	46.94	74.00	-27.06	peak
2	10223.000	36.19	12.24	48.43	74.00	-25.57	peak
3	11444.000	33.48	16.53	50.01	74.00	-23.99	peak
4	12621.000	32.09	17.98	50.07	74.00	-23.93	peak
5	13919.000	28.87	21.68	50.55	74.00	-23.45	peak
6	18000.000	24.87	26.12	50.99	74.00	-23.01	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

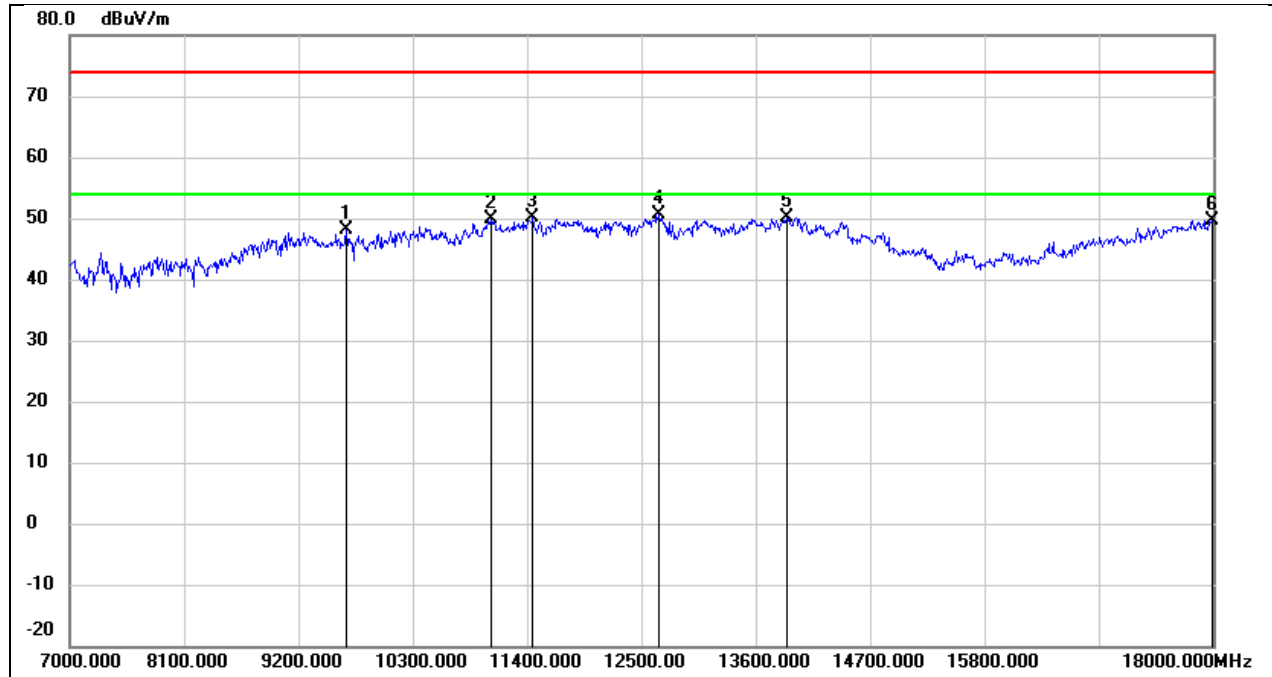


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	37.21	11.01	48.22	74.00	-25.78	peak
2	11059.000	34.96	14.96	49.92	74.00	-24.08	peak
3	11455.000	33.54	16.58	50.12	74.00	-23.88	peak
4	12665.000	32.59	18.04	50.63	74.00	-23.37	peak
5	13897.000	28.58	21.62	50.20	74.00	-23.80	peak
6	17989.000	23.70	26.04	49.74	74.00	-24.26	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

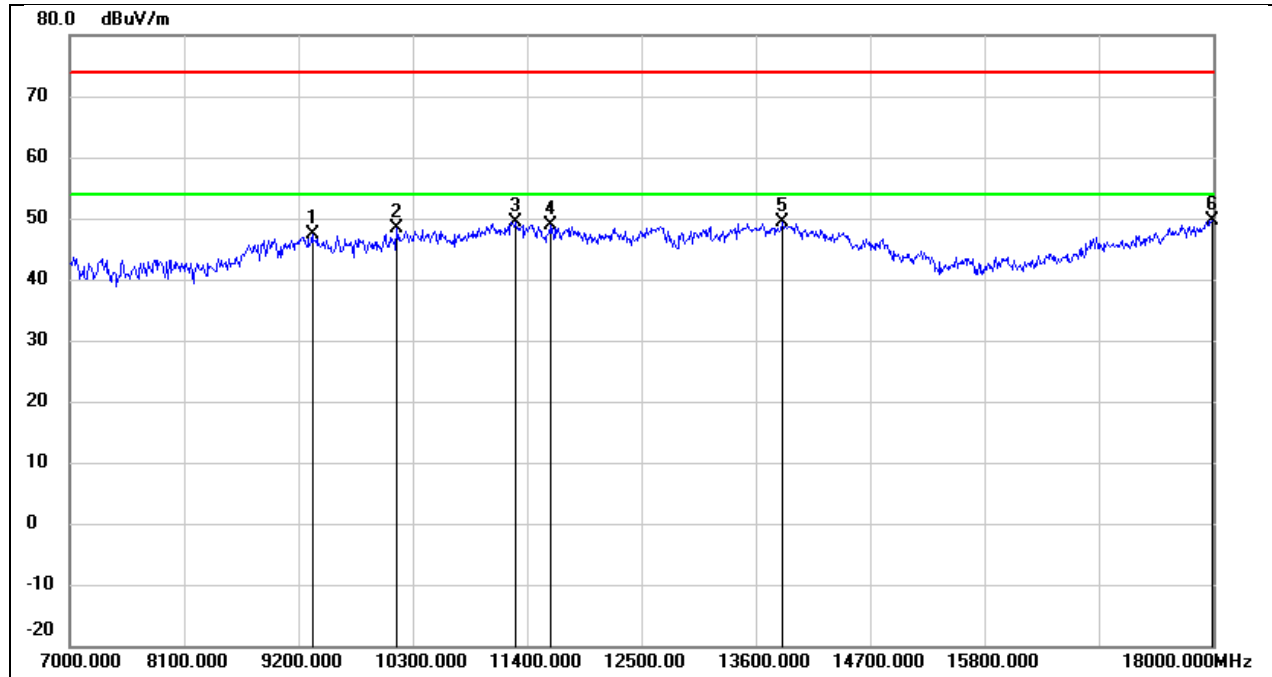


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	36.89	10.54	47.43	74.00	-26.57	peak
2	10146.000	36.38	12.07	48.45	74.00	-25.55	peak
3	11290.000	33.58	15.90	49.48	74.00	-24.52	peak
4	11620.000	31.84	16.99	48.83	74.00	-25.17	peak
5	13853.000	27.92	21.52	49.44	74.00	-24.56	peak
6	17989.000	23.58	26.04	49.62	74.00	-24.38	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

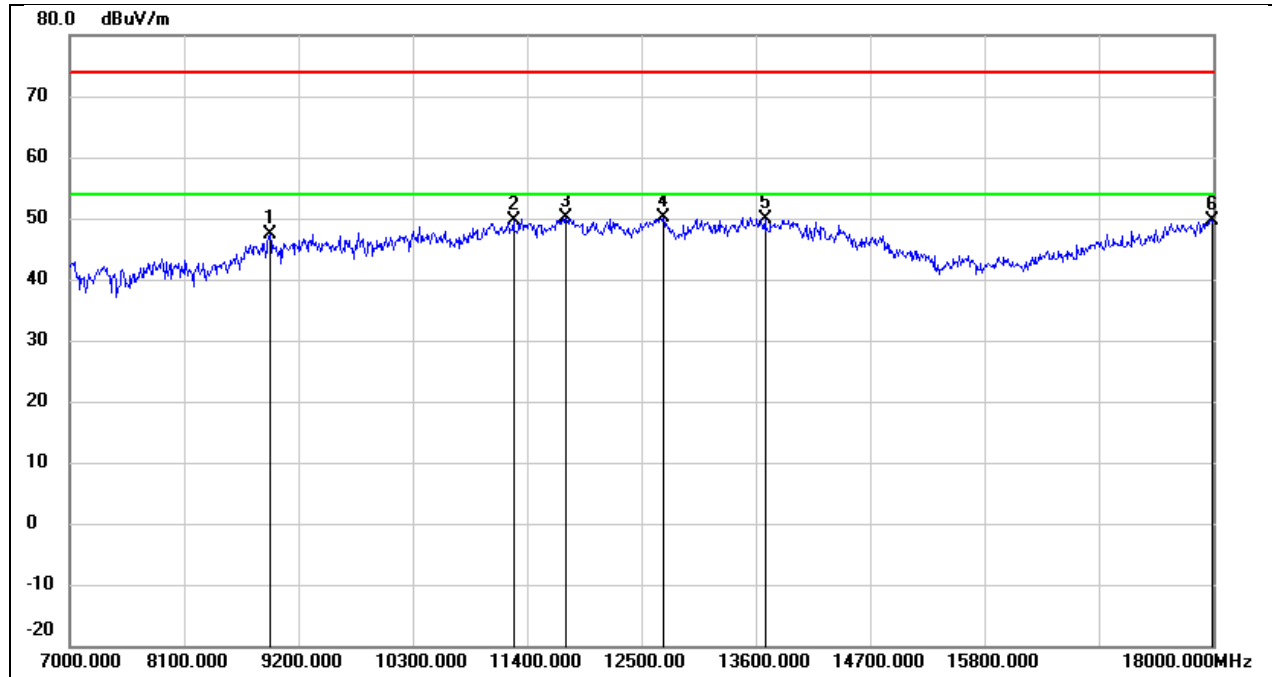


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8925.000	37.56	9.82	47.38	74.00	-26.62	peak
2	11268.000	33.91	15.83	49.74	74.00	-24.26	peak
3	11774.000	32.74	17.28	50.02	74.00	-23.98	peak
4	12709.000	31.93	18.09	50.02	74.00	-23.98	peak
5	13688.000	28.74	21.10	49.84	74.00	-24.16	peak
6	17989.000	23.64	26.04	49.68	74.00	-24.32	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

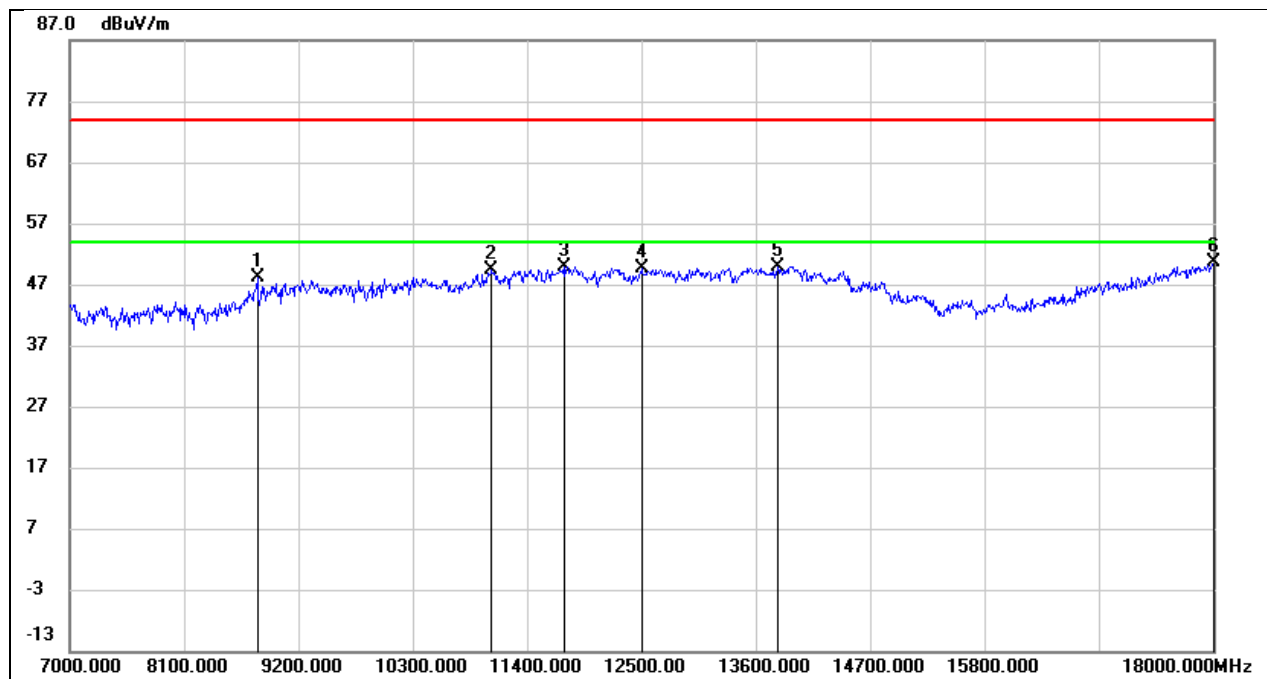


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8804.000	39.17	8.98	48.15	74.00	-25.85	peak
2	11059.000	34.48	14.96	49.44	74.00	-24.56	peak
3	11752.000	32.63	17.24	49.87	74.00	-24.13	peak
4	12500.000	31.92	17.83	49.75	74.00	-24.25	peak
5	13809.000	28.47	21.41	49.88	74.00	-24.12	peak
6	18000.000	24.56	26.12	50.68	74.00	-23.32	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

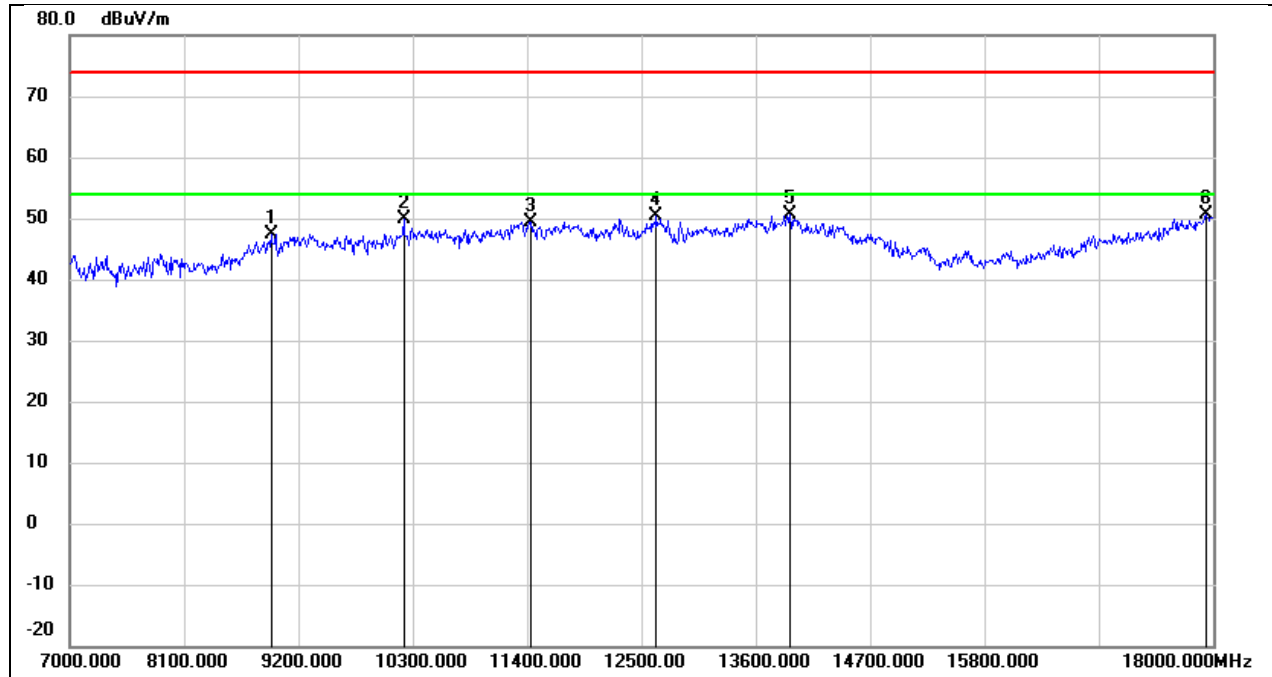


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	37.48	9.90	47.38	74.00	-26.62	peak
2	10212.000	37.63	12.21	49.84	74.00	-24.16	peak
3	11433.000	32.92	16.50	49.42	74.00	-24.58	peak
4	12643.000	32.36	18.01	50.37	74.00	-23.63	peak
5	13930.000	28.84	21.71	50.55	74.00	-23.45	peak
6	17934.000	24.90	25.67	50.57	74.00	-23.43	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

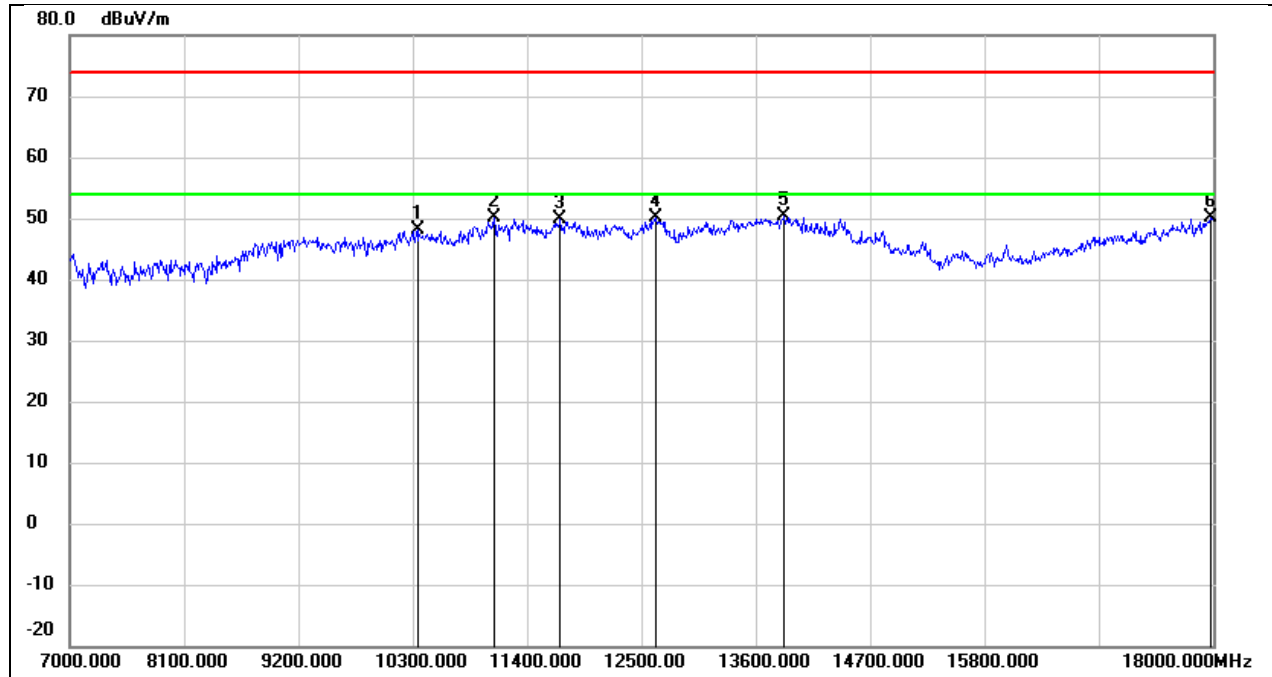


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10344.000	35.52	12.49	48.01	74.00	-25.99	peak
2	11081.000	35.05	15.05	50.10	74.00	-23.90	peak
3	11719.000	32.80	17.18	49.98	74.00	-24.02	peak
4	12632.000	32.19	17.99	50.18	74.00	-23.82	peak
5	13875.000	28.87	21.57	50.44	74.00	-23.56	peak
6	17978.000	24.15	25.97	50.12	74.00	-23.88	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

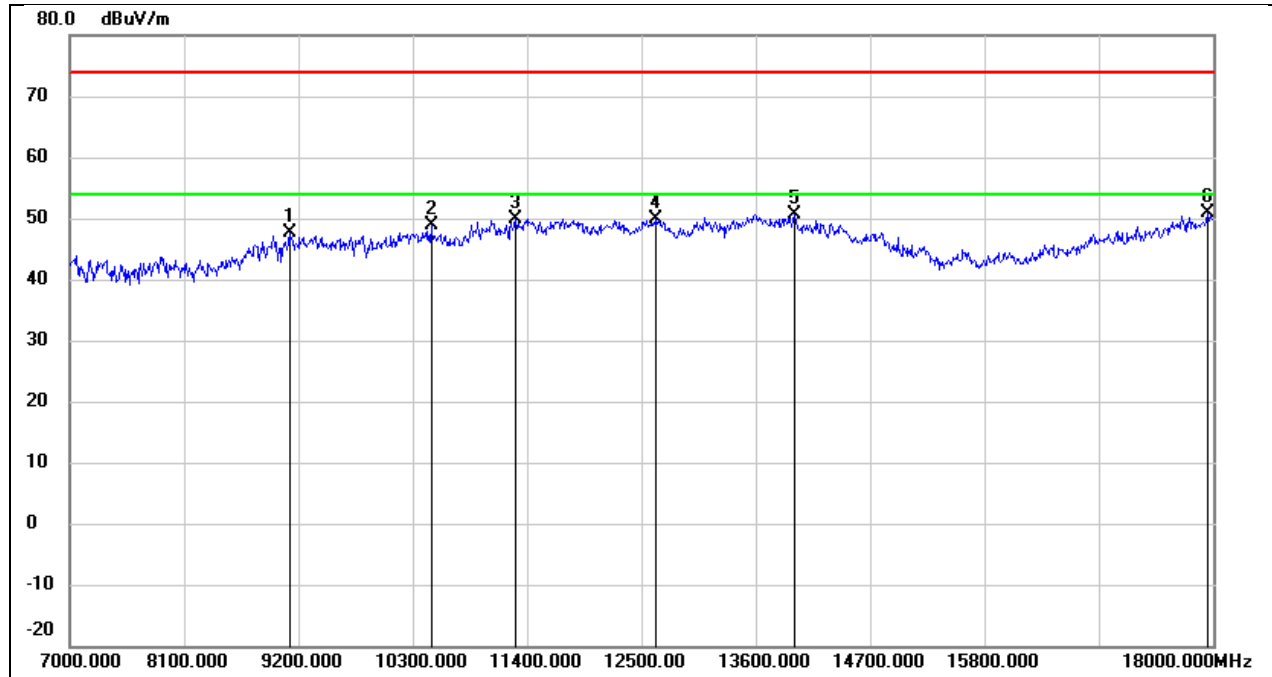


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	37.34	10.41	47.75	74.00	-26.25	peak
2	10476.000	36.00	12.77	48.77	74.00	-25.23	peak
3	11290.000	34.03	15.90	49.93	74.00	-24.07	peak
4	12643.000	31.89	18.01	49.90	74.00	-24.10	peak
5	13974.000	28.77	21.82	50.59	74.00	-23.41	peak
6	17945.000	25.19	25.75	50.94	74.00	-23.06	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

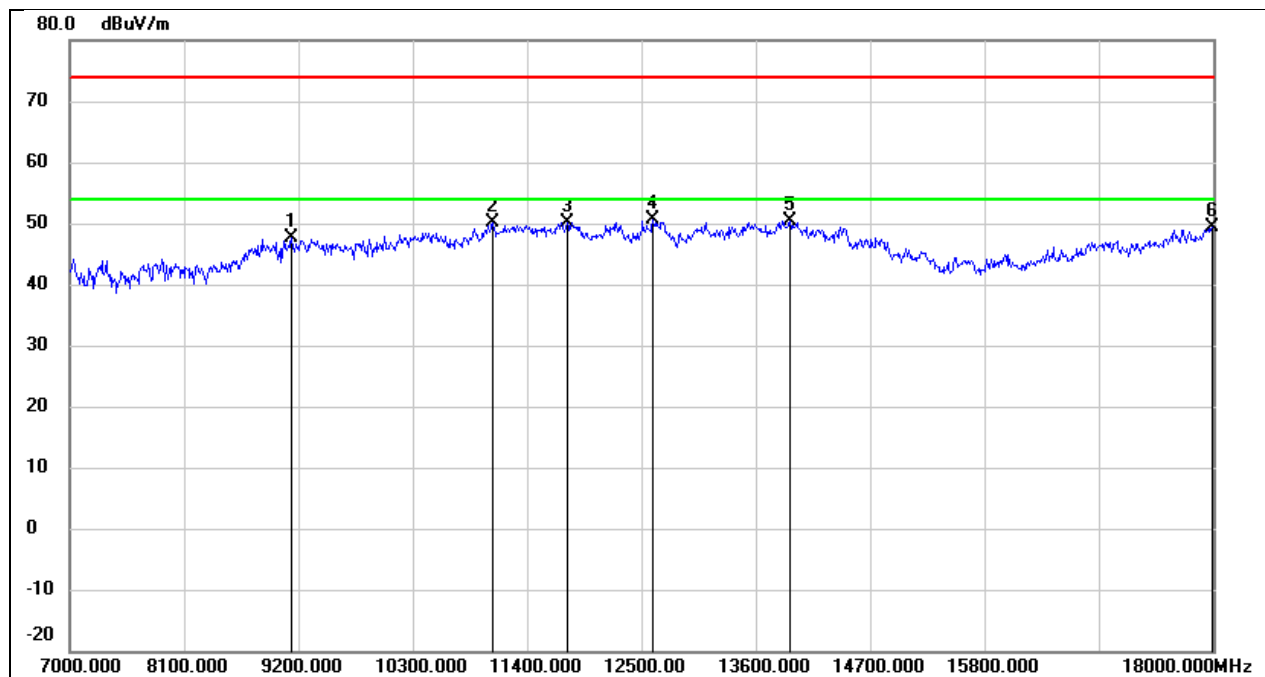


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.10	10.41	47.51	74.00	-26.49	peak
2	11070.000	35.12	15.01	50.13	74.00	-23.87	peak
3	11785.000	32.84	17.30	50.14	74.00	-23.86	peak
4	12610.000	32.69	17.97	50.66	74.00	-23.34	peak
5	13930.000	28.76	21.71	50.47	74.00	-23.53	peak
6	17989.000	23.37	26.04	49.41	74.00	-24.59	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

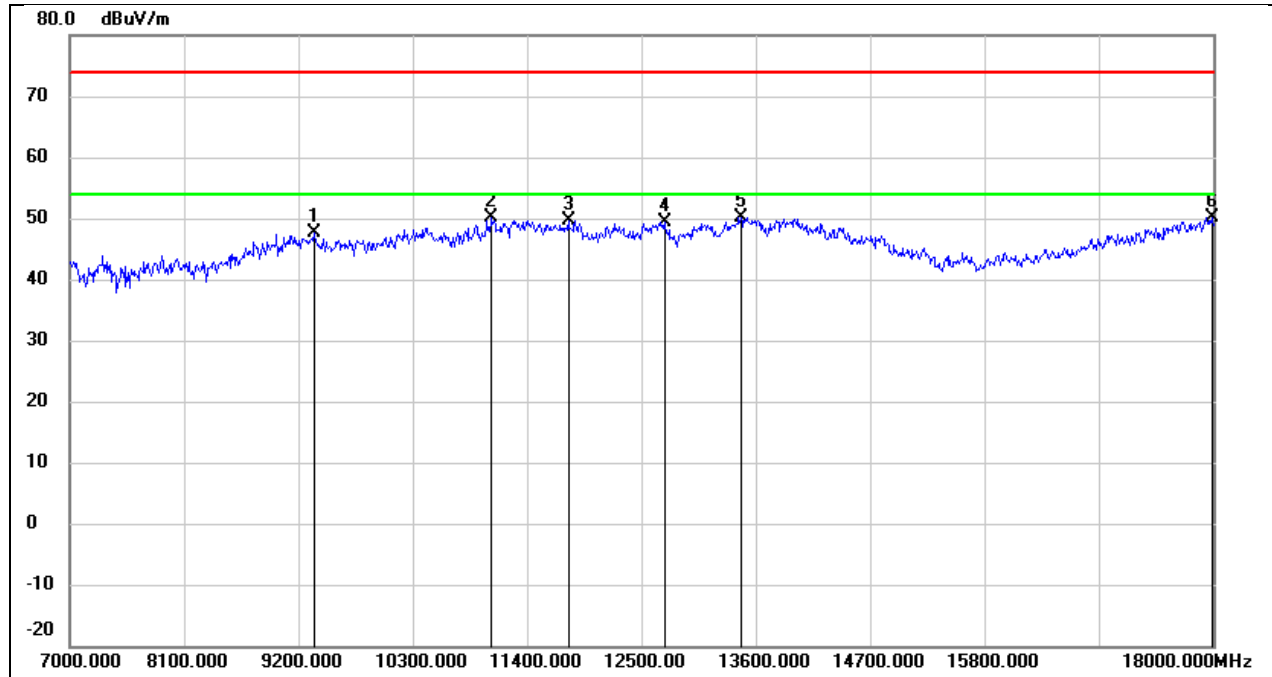


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	37.02	10.56	47.58	74.00	-26.42	peak
2	11059.000	35.22	14.96	50.18	74.00	-23.82	peak
3	11796.000	32.28	17.32	49.60	74.00	-24.40	peak
4	12720.000	31.36	18.09	49.45	74.00	-24.55	peak
5	13457.000	29.76	20.46	50.22	74.00	-23.78	peak
6	17989.000	24.12	26.04	50.16	74.00	-23.84	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

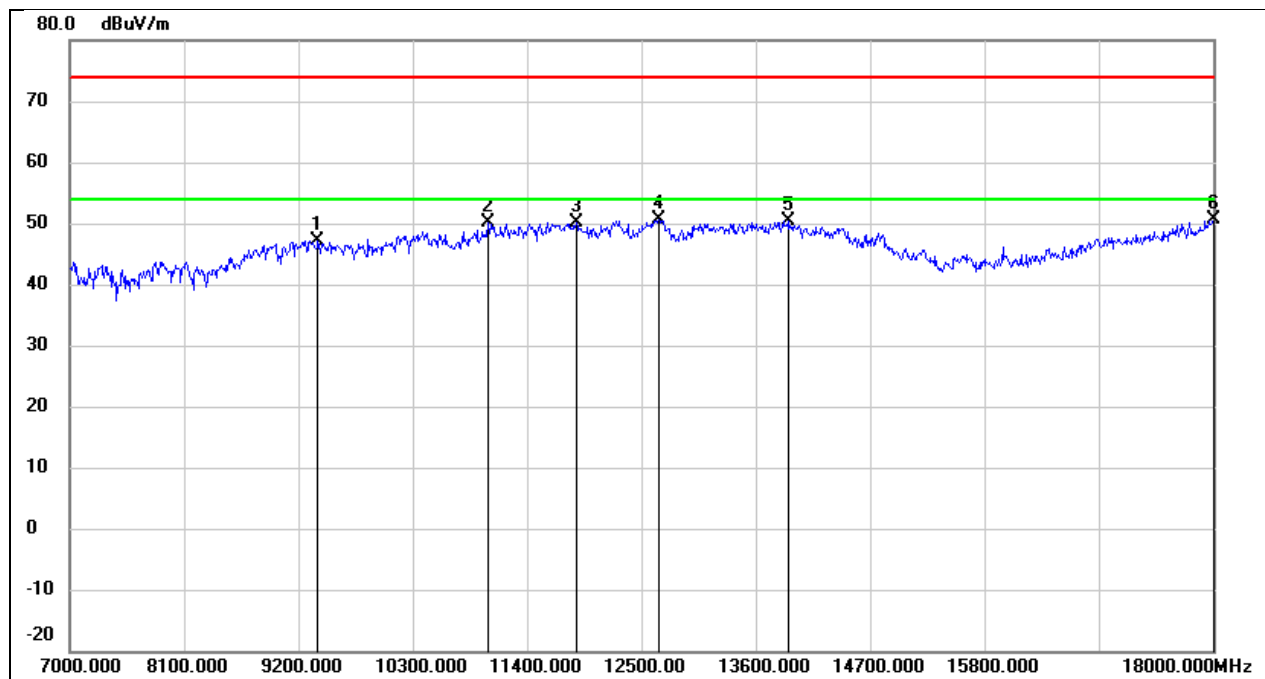


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	36.67	10.58	47.25	74.00	-26.75	peak
2	11026.000	35.28	14.82	50.10	74.00	-23.90	peak
3	11873.000	32.78	17.46	50.24	74.00	-23.76	peak
4	12665.000	32.62	18.04	50.66	74.00	-23.34	peak
5	13919.000	28.64	21.68	50.32	74.00	-23.68	peak
6	18000.000	24.53	26.12	50.65	74.00	-23.35	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

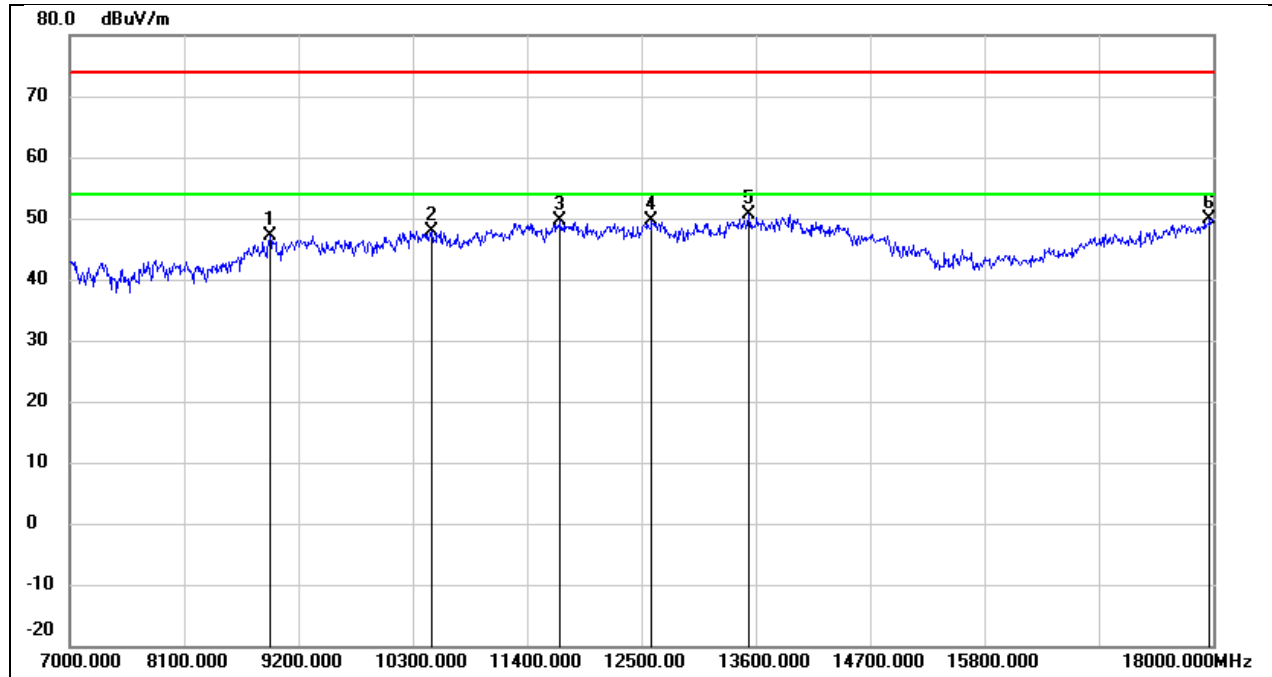


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8925.000	37.43	9.82	47.25	74.00	-26.75	peak
2	10487.000	35.14	12.79	47.93	74.00	-26.07	peak
3	11719.000	32.40	17.18	49.58	74.00	-24.42	peak
4	12599.000	31.67	17.95	49.62	74.00	-24.38	peak
5	13534.000	29.99	20.73	50.72	74.00	-23.28	peak
6	17967.000	24.02	25.89	49.91	74.00	-24.09	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

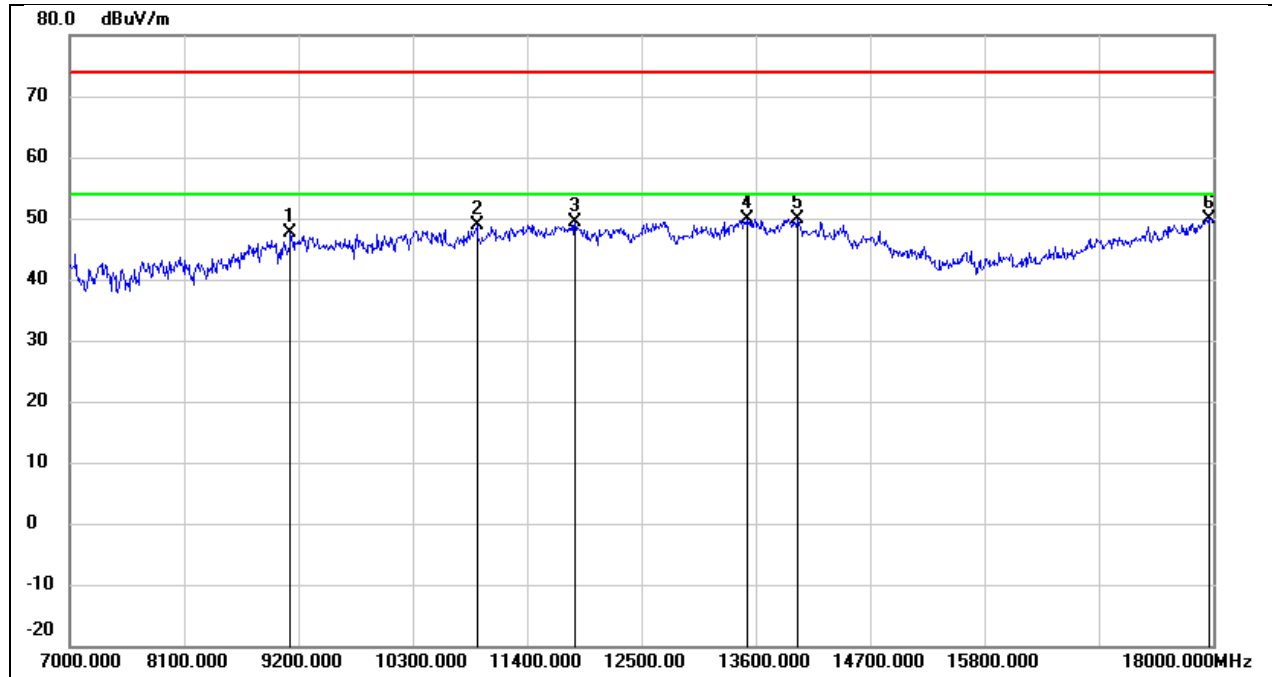

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	37.12	10.42	47.54	74.00	-26.46	peak
2	10916.000	34.45	14.39	48.84	74.00	-25.16	peak
3	11862.000	31.93	17.45	49.38	74.00	-24.62	peak
4	13523.000	29.28	20.70	49.98	74.00	-24.02	peak
5	14007.000	28.13	21.85	49.98	74.00	-24.02	peak
6	17967.000	24.02	25.89	49.91	74.00	-24.09	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

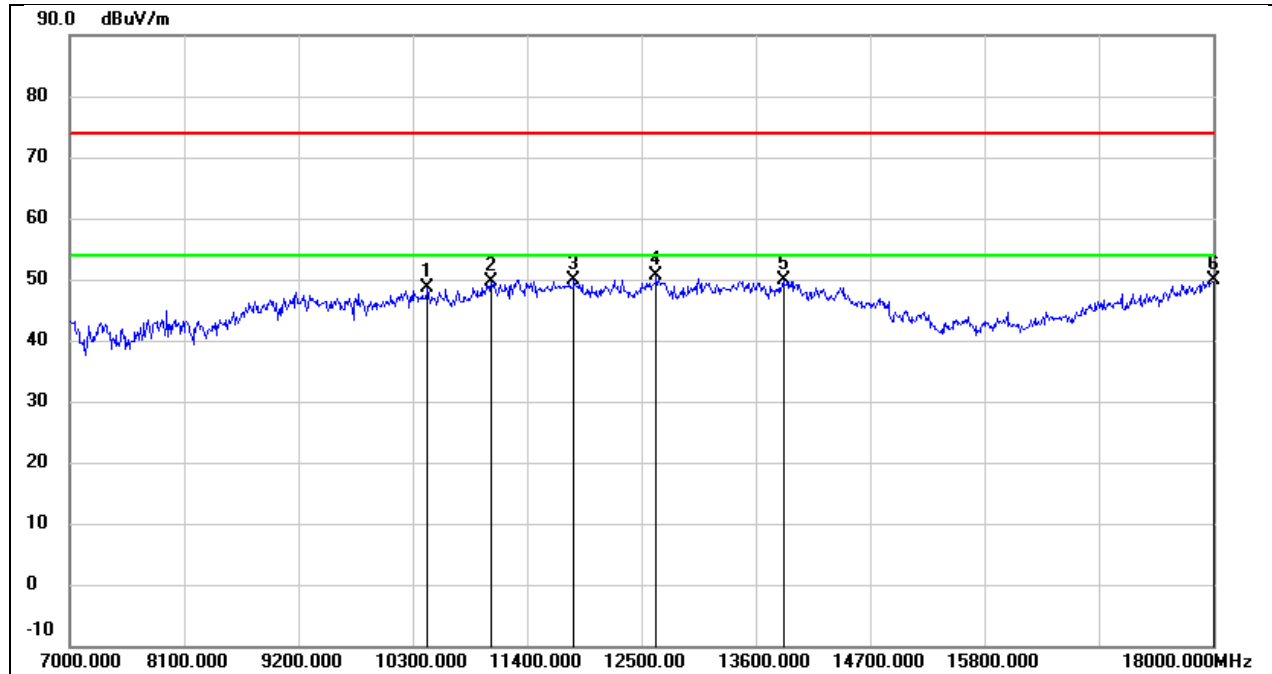

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10443.000	36.02	12.70	48.72	74.00	-25.28	peak
2	11048.000	34.84	14.91	49.75	74.00	-24.25	peak
3	11851.000	32.56	17.43	49.99	74.00	-24.01	peak
4	12643.000	32.54	18.01	50.55	74.00	-23.45	peak
5	13864.000	28.23	21.53	49.76	74.00	-24.24	peak
6	18000.000	23.88	26.12	50.00	74.00	-24.00	peak


8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	AC 120 V, 60 Hz

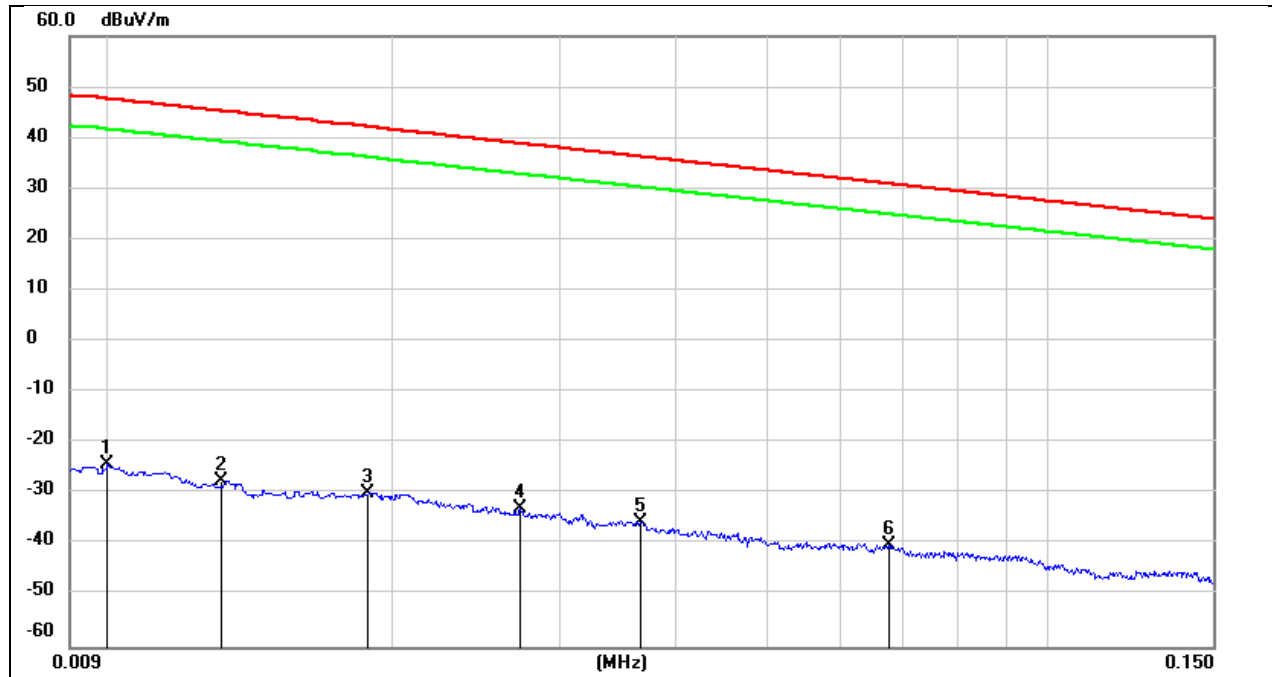


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.01	77.22	-101.4	-24.18	-75.68	47.6	-3.9	-71.78	peak
2	0.0131	73.97	-101.38	-27.41	-78.91	45.25	-6.25	-72.66	peak
3	0.0188	71.64	-101.35	-29.71	-81.21	42.12	-9.38	-71.83	peak
4	0.0273	68.49	-101.38	-32.89	-84.39	38.88	-12.62	-71.77	peak
5	0.0366	65.87	-101.42	-35.55	-87.05	36.33	-15.17	-71.88	peak
6	0.0675	61.64	-101.56	-39.92	-91.42	31.02	-20.48	-70.94	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	AC 120 V, 60 Hz

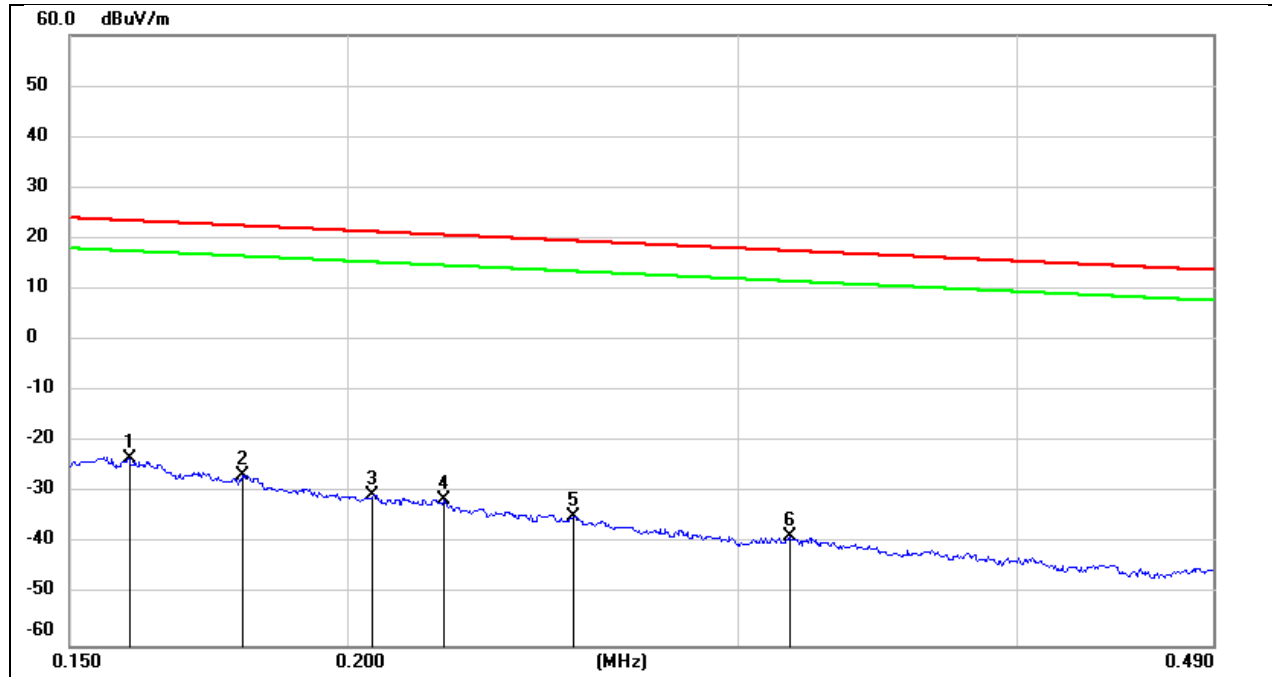

No.	Frequency	Reading	Correct	Result	Result	Limit	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuA/m)	(dBuV/m)	(dBuA/m)	(dB)	
1	0.1595	78.36	-101.65	-23.29	-74.79	23.55	-27.95	-46.84	peak
2	0.1794	75.27	-101.68	-26.41	-77.91	22.53	-28.97	-48.94	peak
3	0.2053	71.29	-101.73	-30.44	-81.94	21.35	-30.15	-51.79	peak
4	0.221	70.34	-101.75	-31.41	-82.91	20.71	-30.79	-52.12	peak
5	0.253	67.14	-101.8	-34.66	-86.16	19.54	-31.96	-54.20	peak
6	0.3163	63.2	-101.87	-38.67	-90.17	17.6	-33.9	-56.27	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	AC 120 V, 60 Hz

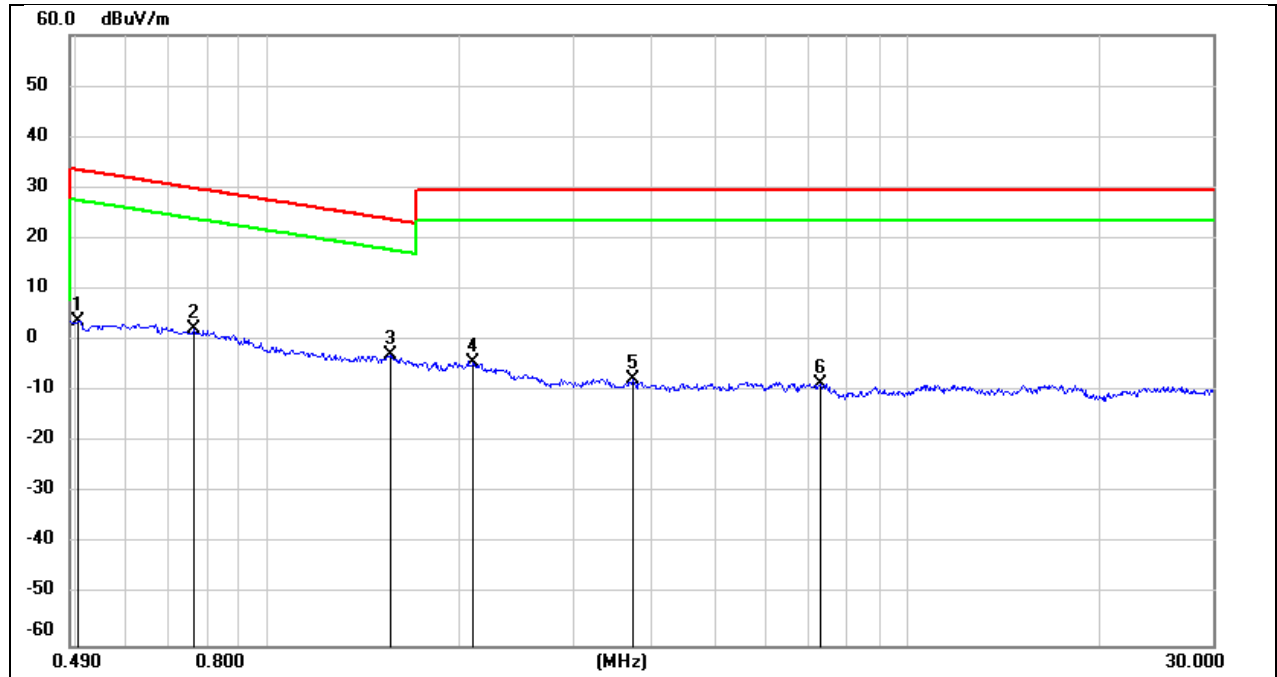

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	65.93	-62.07	3.86	-47.64	33.56	-17.94	-29.70	peak
2	0.7671	64.41	-62.12	2.29	-49.21	29.9	-21.6	-27.61	peak
3	1.5564	59.18	-62.02	-2.84	-54.34	23.76	-27.74	-26.60	peak
4	2.0939	57.39	-61.79	-4.4	-55.90	29.54	-21.96	-33.94	peak
5	3.71	53.7	-61.41	-7.71	-59.21	29.54	-21.96	-37.25	peak
6	7.3361	52.58	-61.17	-8.59	-60.09	29.54	-21.96	-38.13	peak


8.8. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

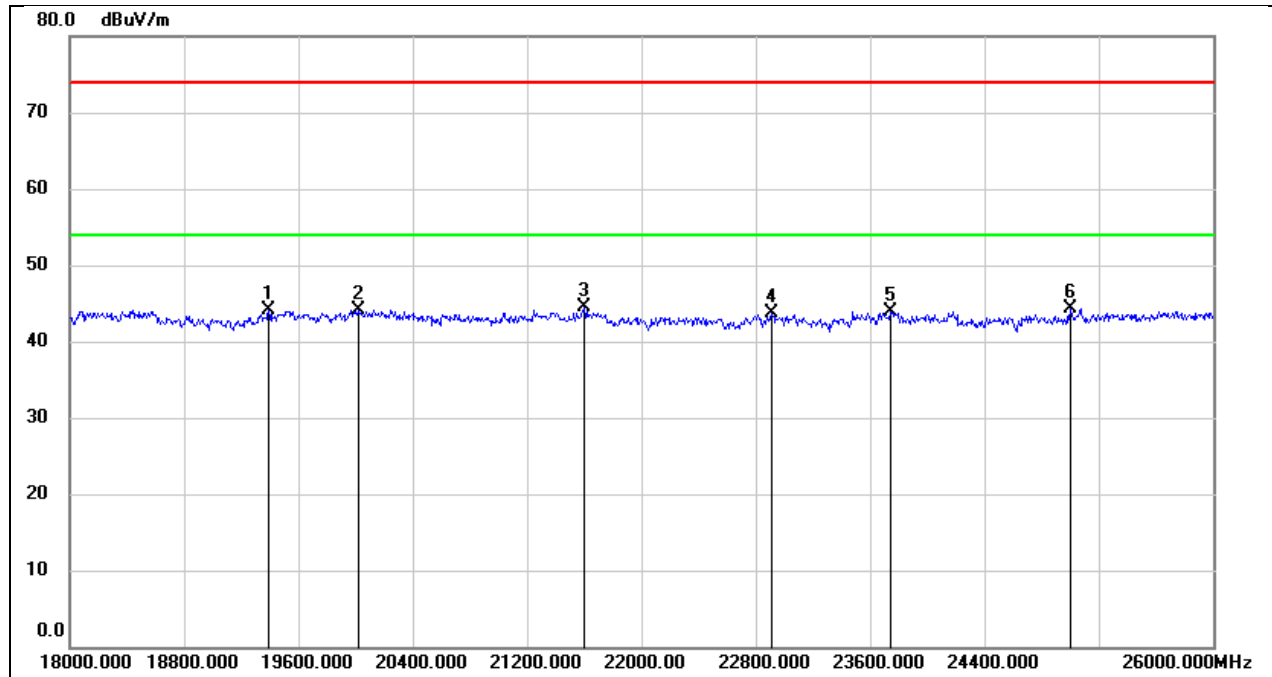

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
2	20016.000	49.56	-5.47	44.09	74.00	-29.91	peak
3	21600.000	49.02	-4.54	44.48	74.00	-29.52	peak
4	22912.000	47.18	-3.53	43.65	74.00	-30.35	peak
5	23744.000	47.15	-3.20	43.95	74.00	-30.05	peak
6	25000.000	46.36	-2.10	44.26	74.00	-29.74	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

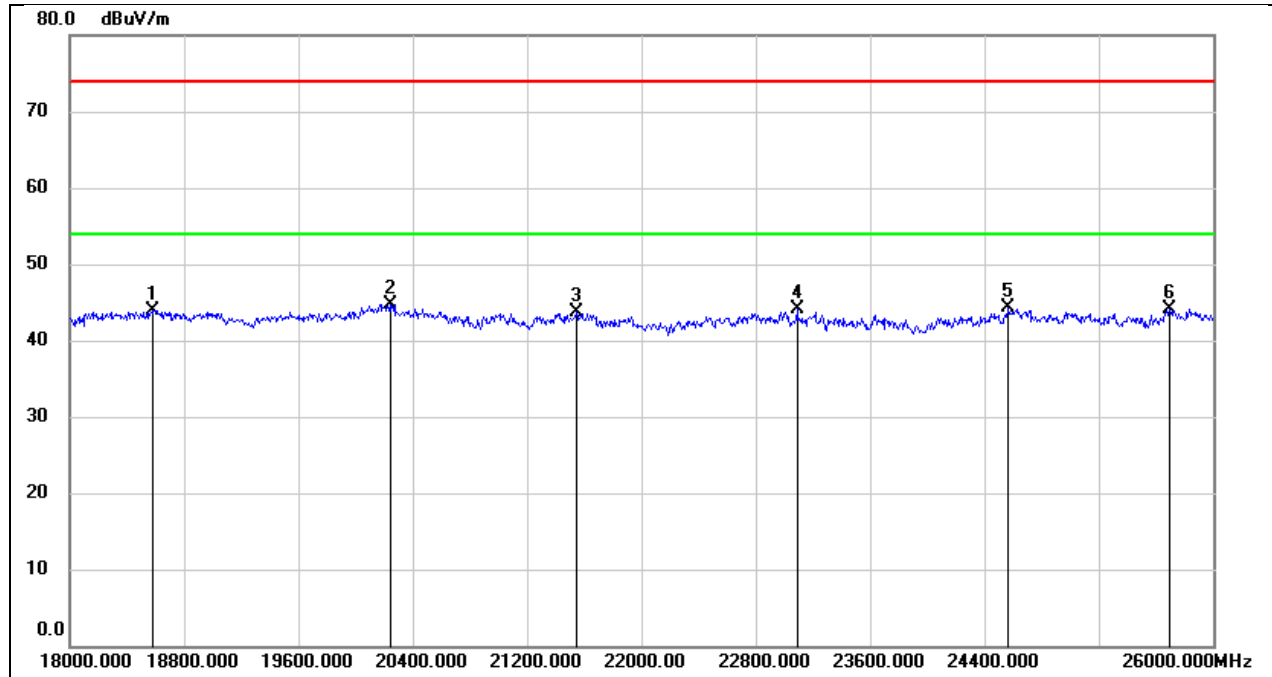

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18576.000	49.29	-5.30	43.99	74.00	-30.01	peak
2	20240.000	50.32	-5.61	44.71	74.00	-29.29	peak
3	21544.000	48.26	-4.63	43.63	74.00	-30.37	peak
4	23088.000	47.52	-3.41	44.11	74.00	-29.89	peak
5	24568.000	46.60	-2.33	44.27	74.00	-29.73	peak
6	25696.000	44.94	-0.86	44.08	74.00	-29.92	peak


8.9. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

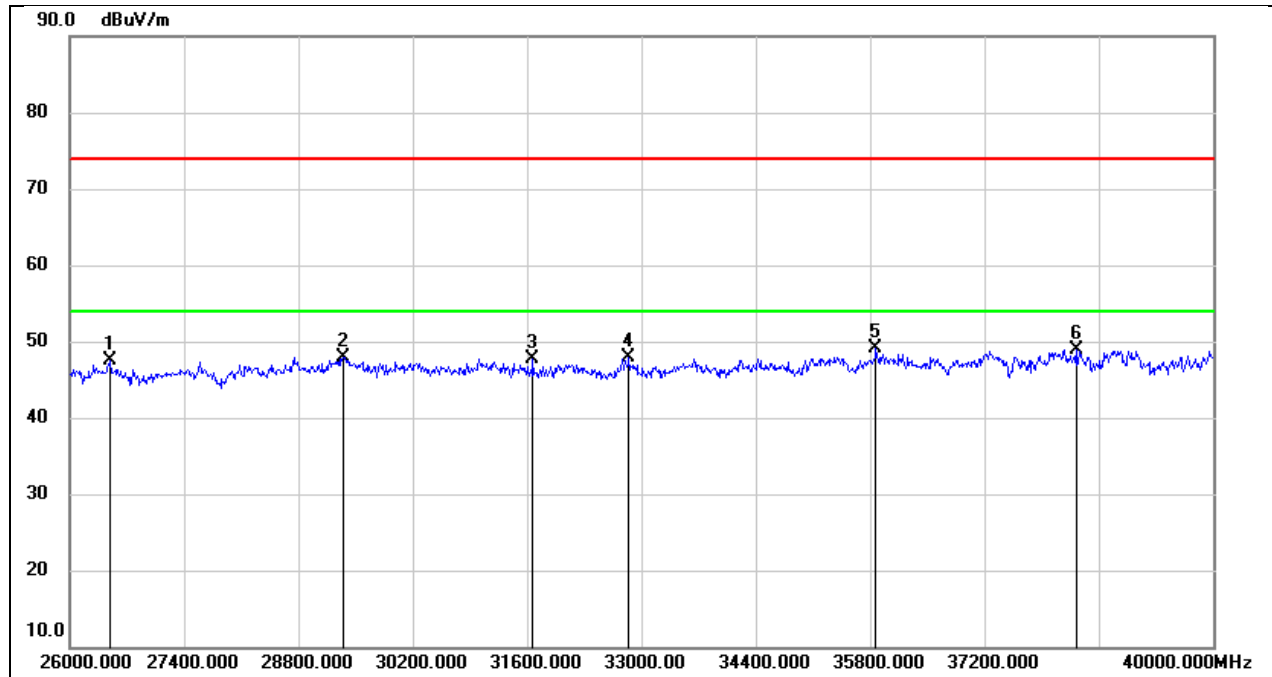

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	52.29	-4.74	47.55	74.00	-26.45	peak
2	29346.000	48.88	-0.91	47.97	74.00	-26.03	peak
3	31670.000	48.86	-1.21	47.65	74.00	-26.35	peak
4	32846.000	48.88	-1.02	47.86	74.00	-26.14	peak
5	35870.000	45.33	3.75	49.08	74.00	-24.92	peak
6	38320.000	45.06	3.77	48.83	74.00	-25.17	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

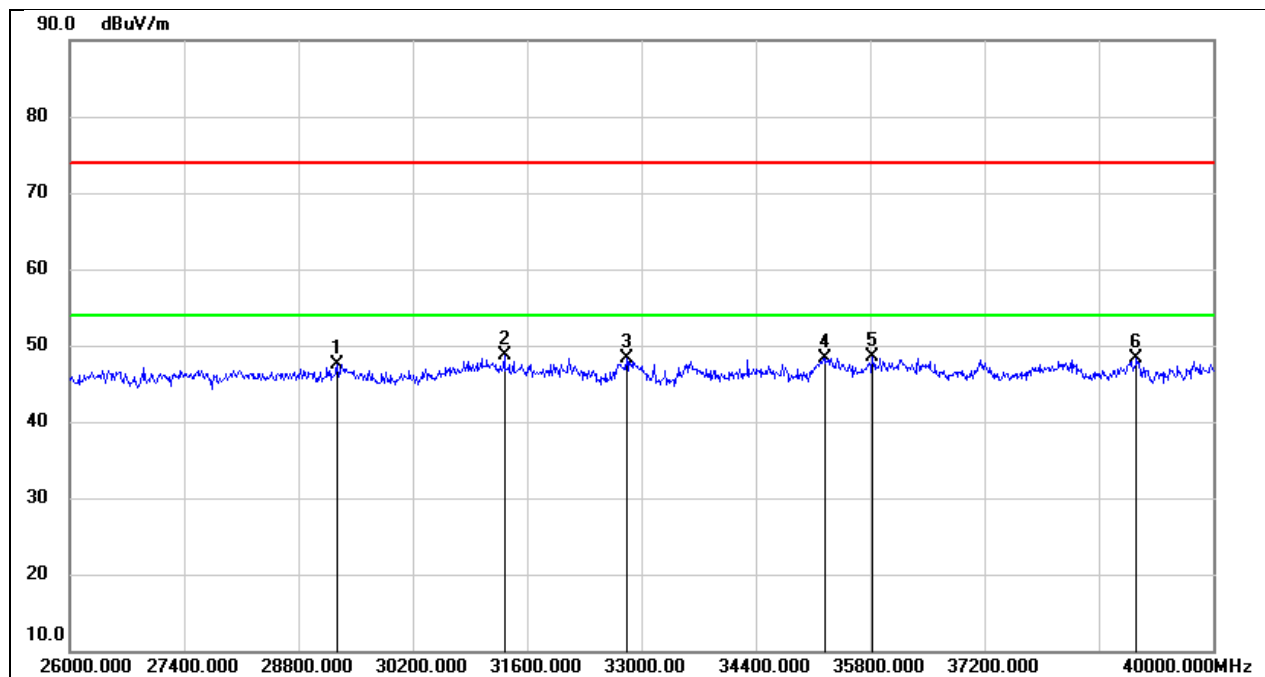

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	29276.000	48.51	-1.01	47.50	74.00	-26.50	peak
2	31320.000	49.61	-0.93	48.68	74.00	-25.32	peak
3	32818.000	49.31	-1.08	48.23	74.00	-25.77	peak
4	35254.000	45.62	2.65	48.27	74.00	-25.73	peak
5	35828.000	44.75	3.67	48.42	74.00	-25.58	peak
6	39062.000	43.98	4.30	48.28	74.00	-25.72	peak


8.10. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120 V, 60 Hz

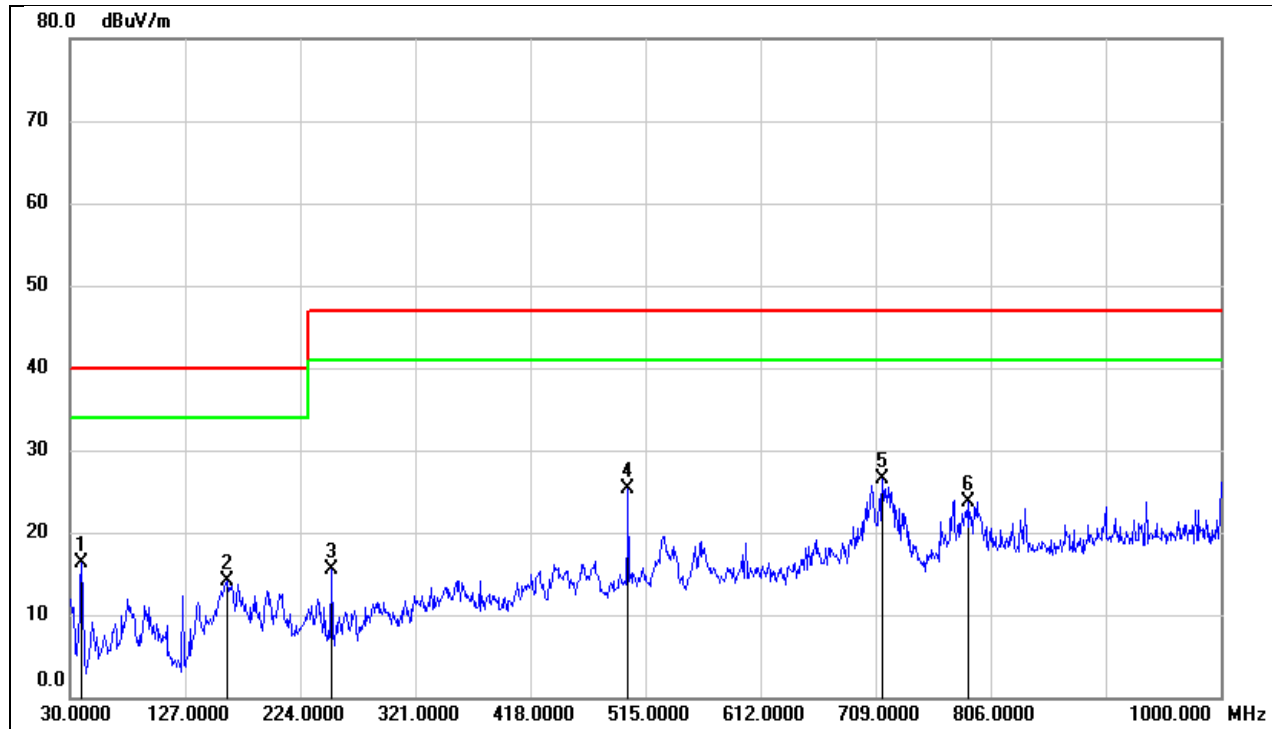

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	36.20	-19.84	16.36	40.00	-23.64	QP
2	161.9200	31.45	-17.43	14.02	40.00	-25.98	QP
3	250.1900	34.37	-18.95	15.42	47.00	-31.58	QP
4	500.4500	35.94	-10.67	25.27	47.00	-21.73	QP
5	714.8200	34.07	-7.65	26.42	47.00	-20.58	QP
6	786.6000	30.52	-6.74	23.78	47.00	-23.22	QP


Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120 V, 60 Hz

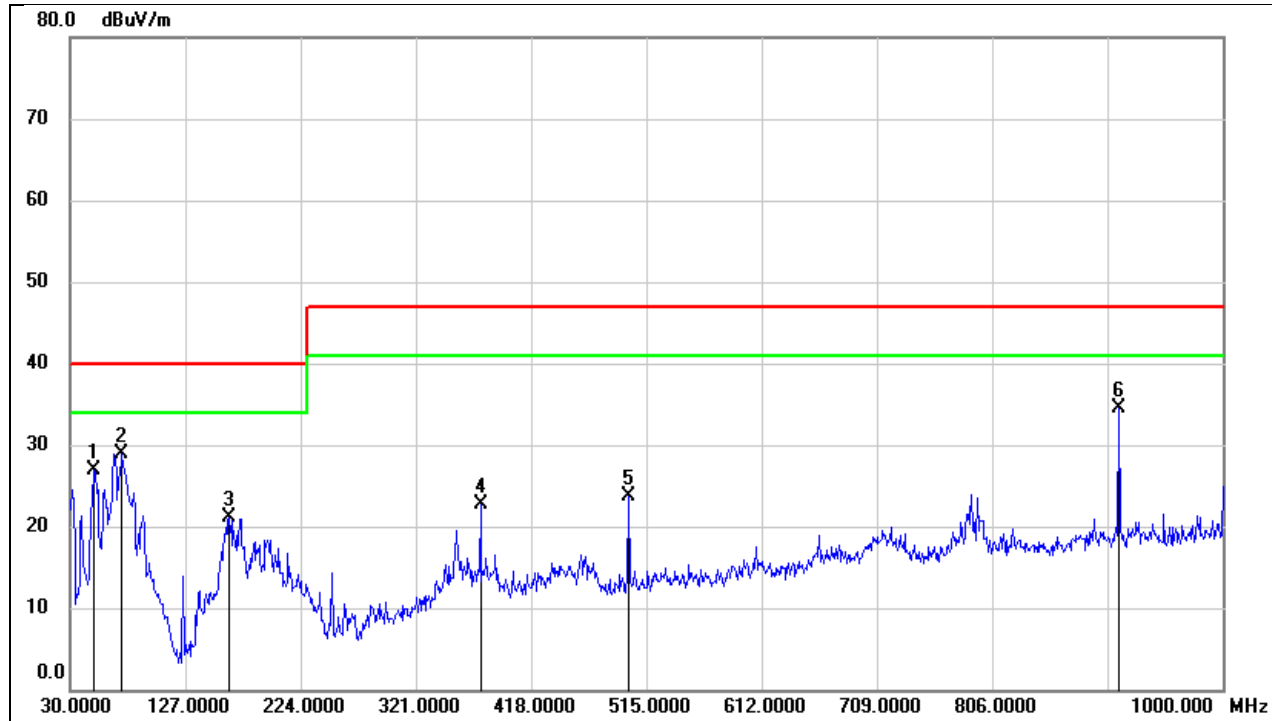

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3700	47.47	-20.56	26.91	40.00	-13.09	QP
2	73.6500	50.03	-21.04	28.99	40.00	-11.01	QP
3	163.8600	38.37	-17.31	21.06	40.00	-18.94	QP
4	375.3200	35.62	-12.92	22.70	47.00	-24.30	QP
5	500.4500	34.42	-10.67	23.75	47.00	-23.25	QP
6	912.7000	39.22	-4.68	34.54	47.00	-12.46	QP

8.11. SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION

SPURIOUS EMISSIONS (802.11b 2.4GHz MID CHANNEL, 802.11ax HE20 UNII-1 BAND HIGH CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

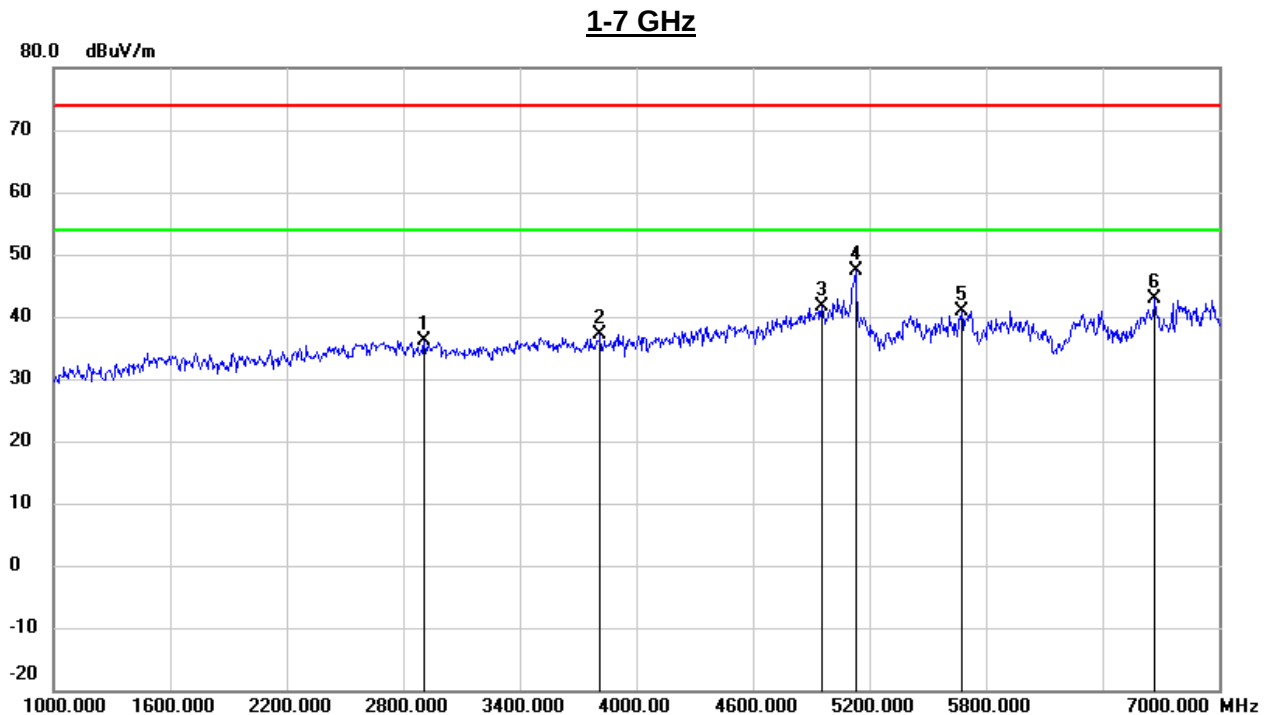

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2908.000	43.35	-7.26	36.09	74.00	-37.91	peak
2	3814.000	42.23	-4.99	37.24	74.00	-36.76	peak
3	4954.000	41.87	-0.33	41.54	74.00	-32.46	peak
4	5128.000	47.31	0.00	47.31	74.00	-26.69	peak
5	5674.000	39.92	0.92	40.84	74.00	-33.16	peak
6	6670.000	38.21	4.57	42.78	74.00	-31.22	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.


5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18 GHz

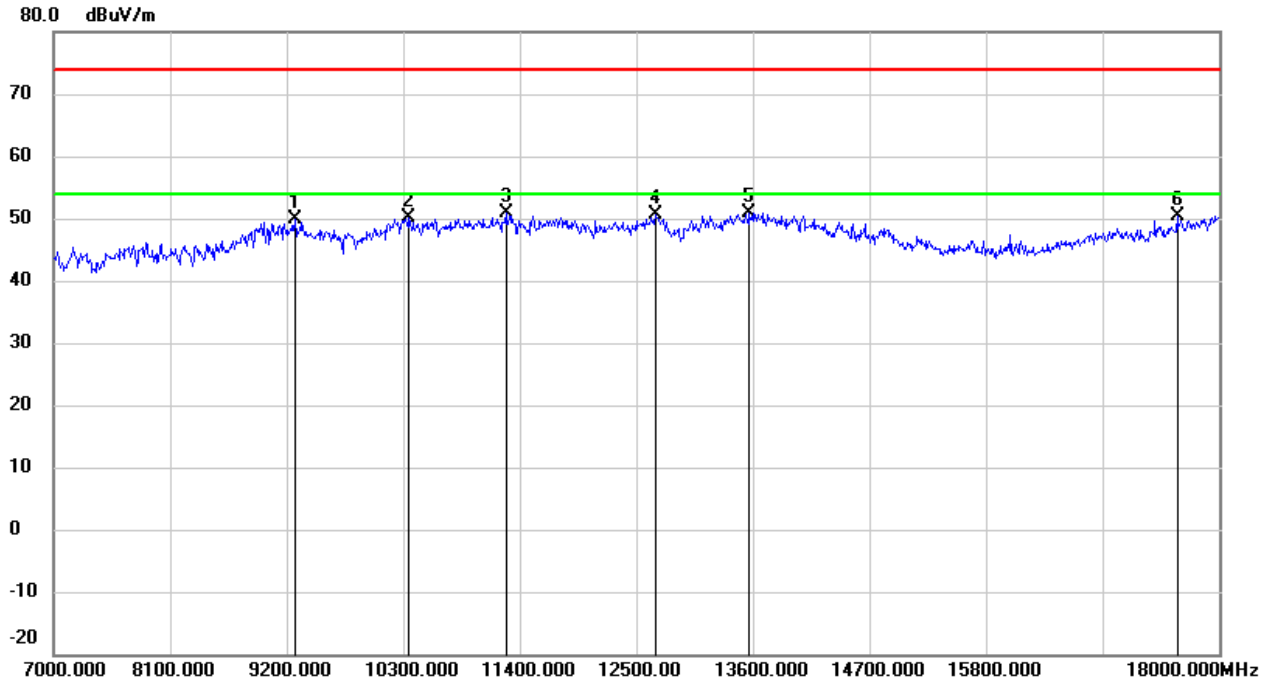


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	39.33	10.51	49.84	74.00	-24.16	peak
2	10355.000	37.57	12.52	50.09	74.00	-23.91	peak
3	11268.000	34.97	15.83	50.80	74.00	-23.20	peak
4	12676.000	32.65	18.05	50.70	74.00	-23.30	peak
5	13567.000	30.17	20.80	50.97	74.00	-23.03	peak
6	17604.000	26.97	23.41	50.38	74.00	-23.62	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

SPURIOUS EMISSIONS (802.11b 2.4GHz MID CHANNEL, 802.11ax HE20 UNII-1 BAND HIGH CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)


1-7 GHz

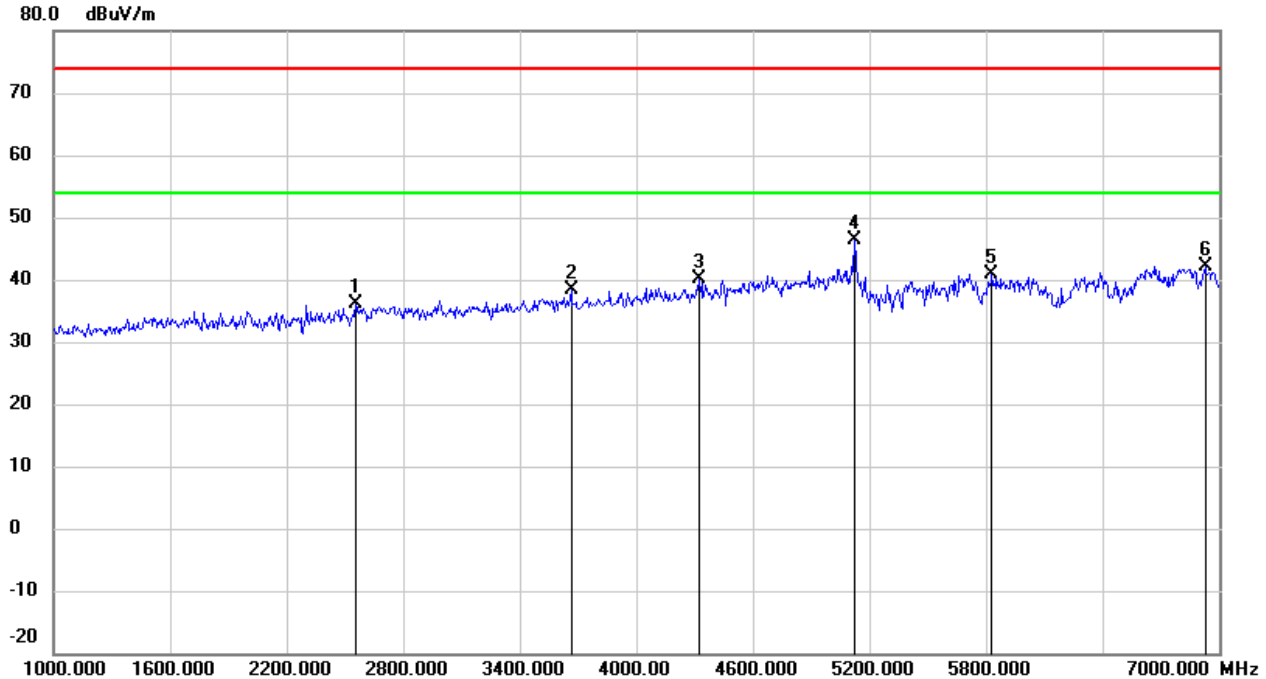

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2554.000	44.40	-8.32	36.08	74.00	-37.92	peak
2	3664.000	43.77	-5.40	38.37	74.00	-35.63	peak
3	4324.000	43.05	-2.96	40.09	74.00	-33.91	peak
4	5122.000	46.41	-0.02	46.39	74.00	-27.61	peak
5	5830.000	39.54	1.36	40.90	74.00	-33.10	peak
6	6928.000	36.32	5.85	42.17	74.00	-31.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18 GHz

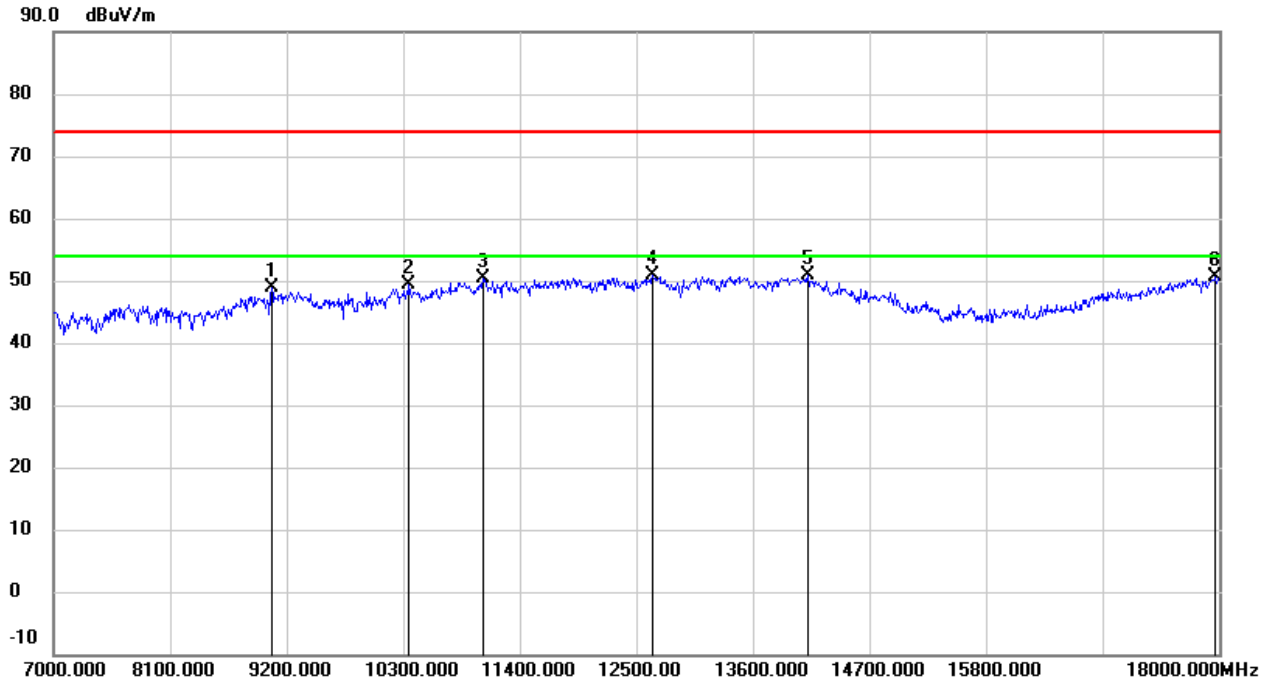

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.60	10.38	48.98	74.00	-25.02	peak
2	10355.000	36.86	12.52	49.38	74.00	-24.62	peak
3	11048.000	35.45	14.91	50.36	74.00	-23.64	peak
4	12654.000	32.85	18.01	50.86	74.00	-23.14	peak
5	14117.000	29.39	21.39	50.78	74.00	-23.22	peak
6	17967.000	24.86	25.89	50.75	74.00	-23.25	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

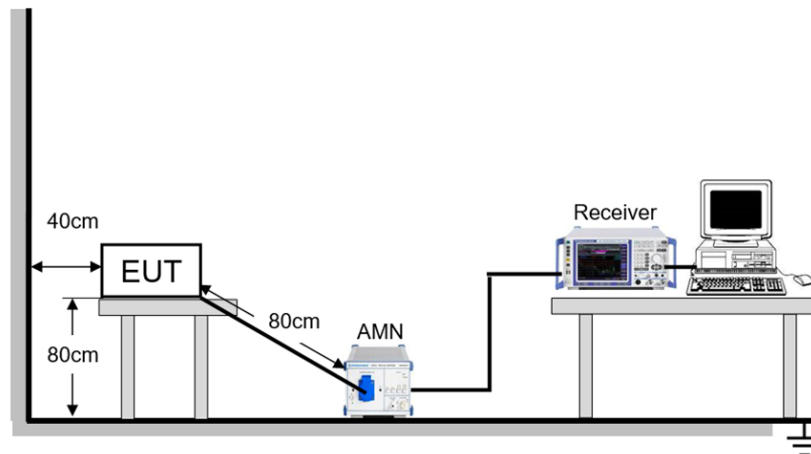


TEST ENVIRONMENT

Temperature	24.8 °C	Relative Humidity	52.8%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

TEST RESULTS

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Line:	Line		

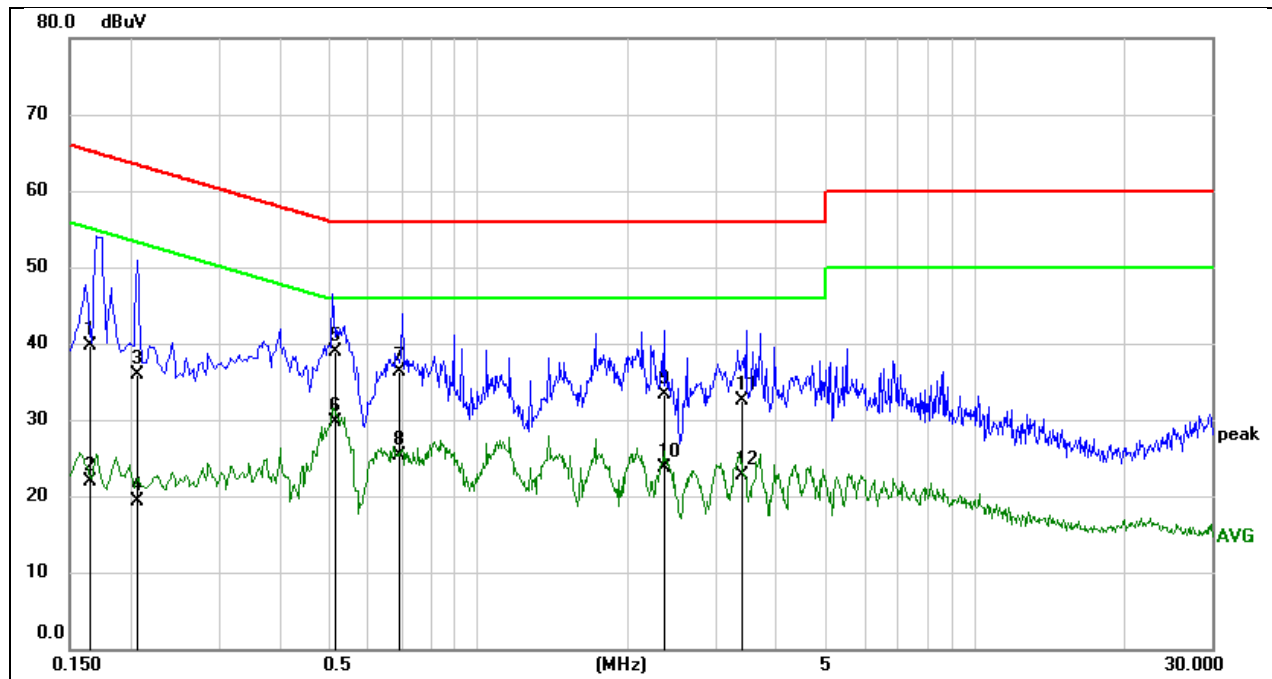


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1659	30.10	9.59	39.69	65.16	-25.47	QP
2	0.1659	12.25	9.59	21.84	55.16	-33.32	AVG
3	0.2059	26.37	9.59	35.96	63.37	-27.41	QP
4	0.2059	9.68	9.59	19.27	53.37	-34.10	AVG
5	0.5167	29.35	9.60	38.95	56.00	-17.05	QP
6	0.5167	20.04	9.60	29.64	46.00	-16.36	AVG
7	0.6924	26.70	9.60	36.30	56.00	-19.70	QP
8	0.6924	15.63	9.60	25.23	46.00	-20.77	AVG
9	2.3611	23.70	9.65	33.35	56.00	-22.65	QP
10	2.3611	14.02	9.65	23.67	46.00	-22.33	AVG
11	3.4060	22.77	9.68	32.45	56.00	-23.55	QP
12	3.4060	13.02	9.68	22.70	46.00	-23.30	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Test Mode:	802.11a20	Frequency(MHz):	5180
Line:	Neutral		

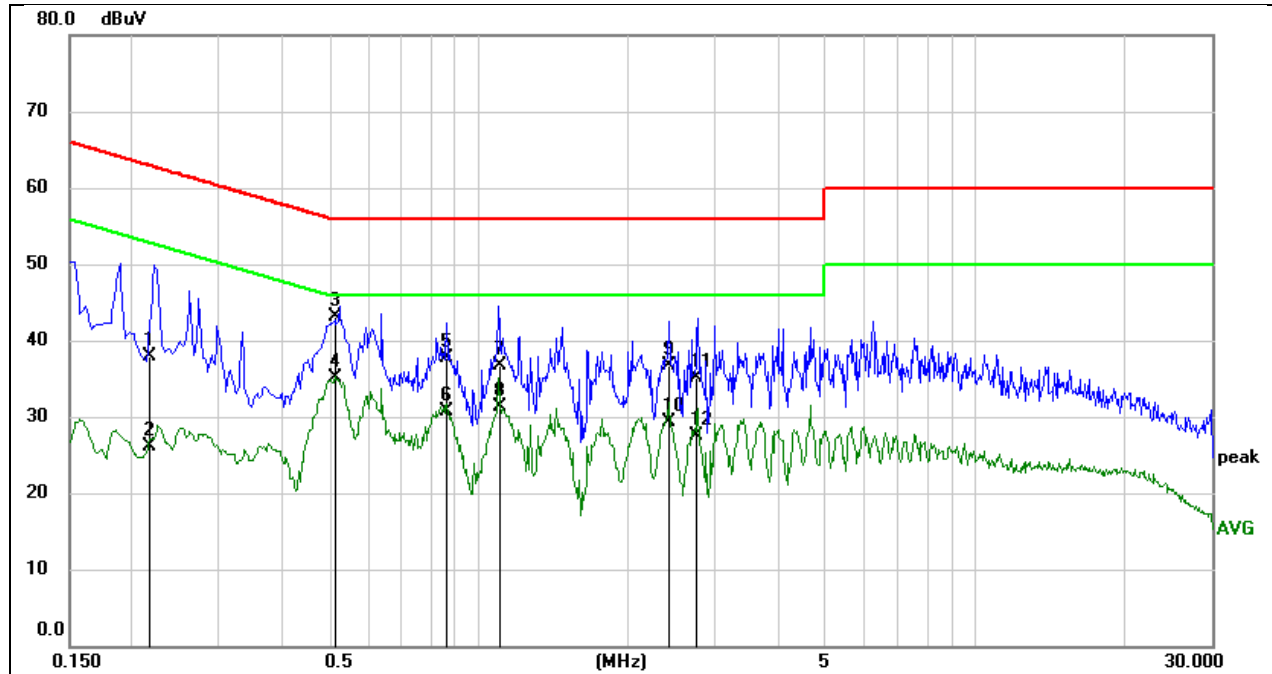

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2171	28.40	9.59	37.99	62.93	-24.94	QP
2	0.2171	16.49	9.59	26.08	52.93	-26.85	AVG
3	0.5157	33.58	9.60	43.18	56.00	-12.82	QP
4	0.5157	25.59	9.60	35.19	46.00	-10.81	AVG
5	0.8616	28.19	9.60	37.79	56.00	-18.21	QP
6	0.8616	21.20	9.60	30.80	46.00	-15.20	AVG
7	1.1100	27.11	9.61	36.72	56.00	-19.28	QP
8	1.1100	21.69	9.61	31.30	46.00	-14.70	AVG
9	2.4154	27.00	9.65	36.65	56.00	-19.35	QP
10	2.4154	19.64	9.65	29.29	46.00	-16.71	AVG
11	2.7538	25.46	9.66	35.12	56.00	-20.88	QP
12	2.7538	17.92	9.66	27.58	46.00	-18.42	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. ISED Test Data:

11.1. APPENDIX A1: EMISSION BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A-CDD	Ant1	5180	20.12	5169.92	5190.04	PASS
	Ant2	5180	19.68	5170.24	5189.92	PASS
	Ant1	5200	20.00	5189.92	5209.92	PASS
	Ant2	5200	19.56	5190.24	5209.80	PASS
	Ant1	5240	20.04	5229.92	5249.96	PASS
	Ant2	5240	19.44	5230.36	5249.80	PASS
	Ant1	5260	19.80	5250.12	5269.92	PASS
	Ant2	5260	19.92	5250.04	5269.96	PASS
	Ant1	5280	19.92	5270.08	5290.00	PASS
	Ant2	5280	19.68	5270.16	5289.84	PASS
	Ant1	5320	19.96	5310.00	5329.96	PASS
	Ant2	5320	19.60	5310.12	5329.72	PASS
	Ant1	5500	19.48	5490.24	5509.72	PASS
	Ant2	5500	19.72	5490.08	5509.80	PASS
	Ant1	5580	20.24	5569.72	5589.96	PASS
	Ant2	5580	20.00	5569.88	5589.88	PASS
	Ant1	5700	19.72	5690.12	5709.84	PASS
	Ant2	5700	19.68	5690.08	5709.76	PASS
	Ant1	5720	20.16	5709.80	5729.96	PASS
	Ant2	5720	20.28	5709.80	5730.08	PASS
	Ant1	5720 UNII-2C	15.20	5709.80	5725	PASS
	Ant2	5720 UNII-2C	15.20	5709.80	5725	PASS
	Ant1	5720 UNII-3	4.96	5725	5729.96	PASS
	Ant2	5720 UNII-3	5.08	5725	5730.08	PASS
	Ant1	5745	20.04	5735.00	5755.04	PASS
	Ant2	5745	23.28	5734.08	5757.36	PASS
	Ant1	5785	19.84	5775.08	5794.92	PASS
	Ant2	5785	20.28	5774.88	5795.16	PASS
	Ant1	5825	20.00	5815.00	5835.00	PASS
	Ant2	5825	20.16	5814.92	5835.08	PASS
11N20MIMO	Ant1	5180	20.24	5169.96	5190.20	PASS
	Ant2	5180	20.08	5169.96	5190.04	PASS
	Ant1	5200	20.24	5189.88	5210.12	PASS
	Ant2	5200	20.00	5189.96	5209.96	PASS
	Ant1	5240	20.28	5229.84	5250.12	PASS
	Ant2	5240	19.76	5230.12	5249.88	PASS
	Ant1	5260	20.44	5249.76	5270.20	PASS
	Ant2	5260	20.16	5249.88	5270.04	PASS
	Ant1	5280	20.32	5269.68	5290.00	PASS
	Ant2	5280	20.08	5269.92	5290.00	PASS
	Ant1	5320	20.04	5309.92	5329.96	PASS
	Ant2	5320	20.04	5309.88	5329.92	PASS
	Ant1	5500	20.16	5489.92	5510.08	PASS
	Ant2	5500	20.04	5489.96	5510.00	PASS
	Ant1	5580	20.32	5569.72	5590.04	PASS
	Ant2	5580	20.12	5569.92	5590.04	PASS
	Ant1	5700	20.24	5689.92	5710.16	PASS
	Ant2	5700	20.00	5690.00	5710.00	PASS
	Ant1	5720	20.04	5710.00	5730.04	PASS
	Ant2	5720	20.24	5709.80	5730.04	PASS
	Ant1	5720 UNII-2C	15.00	5710.00	5725	PASS
	Ant2	5720 UNII-2C	15.20	5709.80	5725	PASS
	Ant1	5720 UNII-3	5.04	5725	5730.04	PASS
	Ant2	5720 UNII-3	5.04	5725	5730.04	PASS
	Ant1	5745	20.20	5734.80	5755.00	PASS
	Ant2	5745	20.96	5734.28	5755.24	PASS


	Ant1	5785	20.28	5774.88	5795.16	PASS
	Ant2	5785	23.32	5773.32	5796.64	PASS
	Ant1	5825	20.44	5814.72	5835.16	PASS
	Ant2	5825	24.40	5810.76	5835.16	PASS
11N40MIMO	Ant1	5190	40.48	5169.76	5210.24	PASS
	Ant2	5190	40.00	5170.00	5210.00	PASS
	Ant1	5230	40.48	5209.76	5250.24	PASS
	Ant2	5230	40.16	5210.00	5250.16	PASS
	Ant1	5270	40.56	5249.60	5290.16	PASS
	Ant2	5270	40.00	5250.00	5290.00	PASS
	Ant1	5310	40.80	5289.52	5330.32	PASS
	Ant2	5310	39.84	5289.92	5329.76	PASS
	Ant1	5510	40.80	5489.68	5530.48	PASS
	Ant2	5510	39.92	5490.08	5530.00	PASS
	Ant1	5550	40.48	5529.84	5570.32	PASS
	Ant2	5550	41.12	5529.36	5570.48	PASS
	Ant1	5670	40.64	5649.68	5690.32	PASS
	Ant2	5670	40.32	5649.84	5690.16	PASS
	Ant1	5710	40.56	5689.76	5730.32	PASS
	Ant2	5710	40.48	5689.76	5730.24	PASS
	Ant1	5710 UNII-2C	35.24	5689.76	5725	PASS
	Ant2	5710 UNII-2C	35.24	5689.76	5725	PASS
	Ant1	5710 UNII-3	5.32	5725	5730.32	PASS
	Ant2	5710 UNII-3	5.24	5725	5730.24	PASS
	Ant1	5755	40.88	5734.60	5775.48	PASS
	Ant2	5755	41.04	5734.52	5775.56	PASS
	Ant1	5795	41.04	5774.68	5815.72	PASS
	Ant2	5795	42.40	5773.08	5815.48	PASS
11AC80MIMO	Ant1	5210	80.32	5169.84	5250.16	PASS
	Ant2	5210	79.84	5170.16	5250.00	PASS
	Ant1	5290	80.00	5250.00	5330.00	PASS
	Ant2	5290	79.84	5250.16	5330.00	PASS
	Ant1	5530	80.16	5490.00	5570.16	PASS
	Ant2	5530	80.00	5490.16	5570.16	PASS
	Ant1	5610	80.16	5570.00	5650.16	PASS
	Ant2	5610	80.00	5570.16	5650.16	PASS
	Ant1	5690	80.32	5650.00	5730.32	PASS
	Ant2	5690	80.16	5649.84	5730.00	PASS
	Ant1	5690 UNII-2C	75	5650.00	5725	PASS
	Ant2	5690 UNII-2C	75.16	5649.84	5725	PASS
	Ant1	5690 UNII-3	5.32	5725	5730.32	PASS
	Ant2	5690 UNII-3	5	5725	5730.00	PASS
	Ant1	5775	80.16	5735.00	5815.16	PASS
	Ant2	5775	80.16	5734.84	5815.00	PASS
11AX20MIMO	Ant1	5180	21.80	5168.92	5190.72	PASS
	Ant2	5180	21.92	5169.04	5190.96	PASS
	Ant1	5200	21.68	5189.00	5210.68	PASS
	Ant2	5200	22.36	5189.32	5211.68	PASS
	Ant1	5240	19.96	5230.00	5249.96	PASS
	Ant2	5240	19.96	5230.00	5249.96	PASS
	Ant1	5260	22.56	5248.20	5270.76	PASS
	Ant2	5260	21.92	5249.44	5271.36	PASS
	Ant1	5280	21.60	5269.12	5290.72	PASS
	Ant2	5280	22.68	5268.64	5291.32	PASS
	Ant1	5320	21.80	5309.00	5330.80	PASS
	Ant2	5320	21.88	5308.88	5330.76	PASS
	Ant1	5500	21.80	5489.24	5511.04	PASS
	Ant2	5500	23.00	5488.36	5511.36	PASS
	Ant1	5580	21.84	5568.88	5590.72	PASS
	Ant2	5580	21.60	5569.40	5591.00	PASS
	Ant1	5700	21.32	5689.56	5710.88	PASS
	Ant2	5700	22.60	5689.16	5711.76	PASS
	Ant1	5720	22.16	5707.00	5731.16	PASS
	Ant2	5720	25.16	5708.88	5734.04	PASS

	Ant1	5720 UNII-2C	18.00	5707.00	5725	PASS
	Ant2	5720 UNII-2C	16.12	5708.88	5725	PASS
	Ant1	5720 UNII-3	6.16	5725	5731.16	PASS
	Ant2	5720 UNII-3	9.04	5725	5734.04	PASS
	Ant1	5745	21.44	5734.40	5755.84	PASS
	Ant2	5745	22.92	5733.80	5756.72	PASS
	Ant1	5785	22.68	5773.56	5796.24	PASS
	Ant2	5785	23.44	5773.16	5796.60	PASS
	Ant1	5825	23.76	5814.08	5837.84	PASS
	Ant2	5825	23.80	5813.92	5837.72	PASS
11AX40MIMO	Ant1	5190	39.68	5170.16	5209.84	PASS
	Ant2	5190	39.76	5170.16	5209.92	PASS
	Ant1	5230	39.76	5210.16	5249.92	PASS
	Ant2	5230	39.60	5210.24	5249.84	PASS
	Ant1	5270	39.76	5250.16	5289.92	PASS
	Ant2	5270	39.76	5250.16	5289.92	PASS
	Ant1	5310	39.76	5290.16	5329.92	PASS
	Ant2	5310	39.84	5290.08	5329.92	PASS
	Ant1	5510	39.84	5490.08	5529.92	PASS
	Ant2	5510	39.84	5490.08	5529.92	PASS
	Ant1	5550	39.76	5530.08	5569.84	PASS
	Ant2	5550	39.76	5530.16	5569.92	PASS
	Ant1	5670	39.68	5650.16	5689.84	PASS
	Ant2	5670	39.68	5650.16	5689.84	PASS
	Ant1	5710	39.76	5690.16	5729.92	PASS
	Ant2	5710	39.84	5690.08	5729.92	PASS
	Ant1	5710 UNII-2C	34.84	5690.16	5725	PASS
	Ant2	5710 UNII-2C	34.92	5690.08	5725	PASS
	Ant1	5710 UNII-3	4.92	5725	5729.92	PASS
	Ant2	5710 UNII-3	4.92	5725	5729.92	PASS
	Ant1	5755	39.84	5735.08	5774.92	PASS
	Ant2	5755	39.76	5735.08	5774.84	PASS
	Ant1	5795	39.84	5775.16	5815.00	PASS
	Ant2	5795	44.00	5771.00	5815.00	PASS
11AX80MIMO	Ant1	5210	80.64	5169.68	5250.32	PASS
	Ant2	5210	80.80	5169.68	5250.48	PASS
	Ant1	5290	80.64	5249.84	5330.48	PASS
	Ant2	5290	80.32	5249.84	5330.16	PASS
	Ant1	5530	80.48	5489.84	5570.32	PASS
	Ant2	5530	80.48	5489.84	5570.32	PASS
	Ant1	5610	80.80	5569.68	5650.48	PASS
	Ant2	5610	80.48	5569.84	5650.32	PASS
	Ant1	5690	80.64	5649.84	5730.48	PASS
	Ant2	5690	80.48	5649.84	5730.32	PASS
	Ant1	5690 UNII-2C	75.16	5649.84	5725	PASS
	Ant2	5690 UNII-2C	75.16	5649.84	5725	PASS
	Ant1	5690 UNII-3	5.48	5725	5730.48	PASS
	Ant2	5690 UNII-3	5.32	5725	5730.32	PASS
	Ant1	5775	80.64	5734.84	5815.48	PASS
	Ant2	5775	80.48	5734.84	5815.32	PASS


11.1.2. Test Graphs

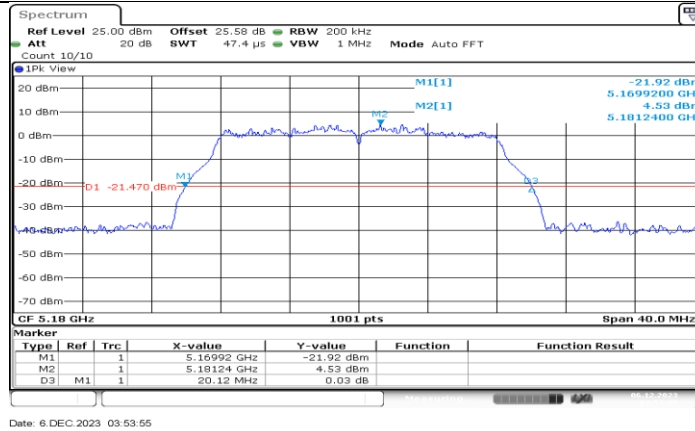


11A-CDD_Ant1_5180

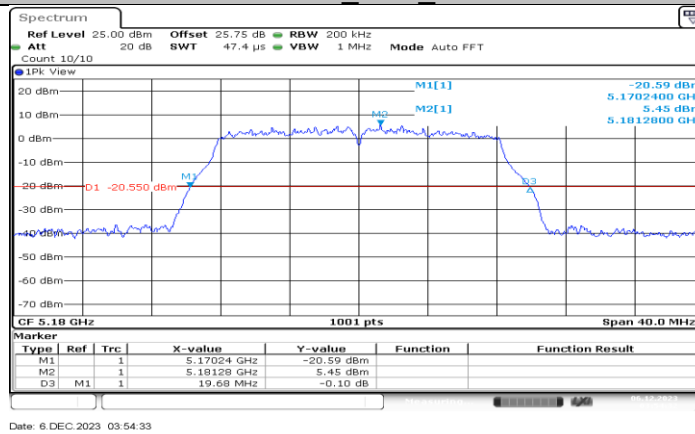


11A-CDD_Ant2_5180

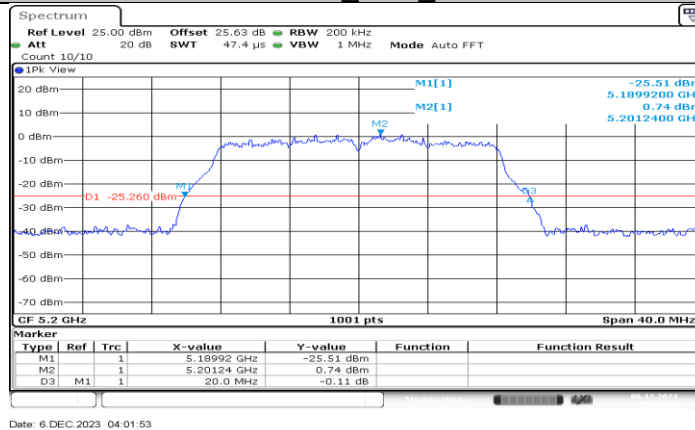


11A-CDD_Ant1_5200

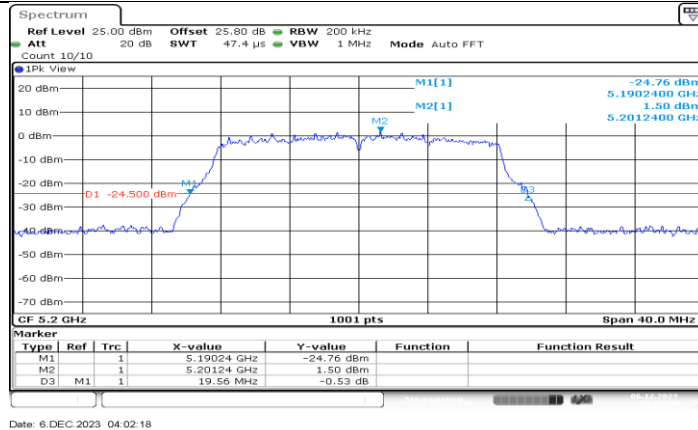


11A-CDD_Ant2_5200

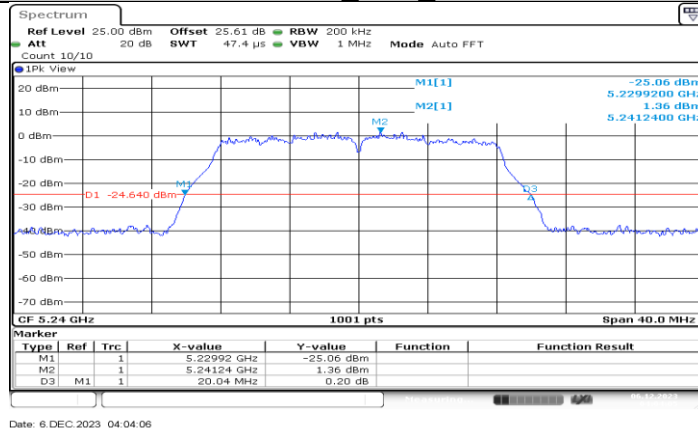


11A-CDD_Ant1_5240

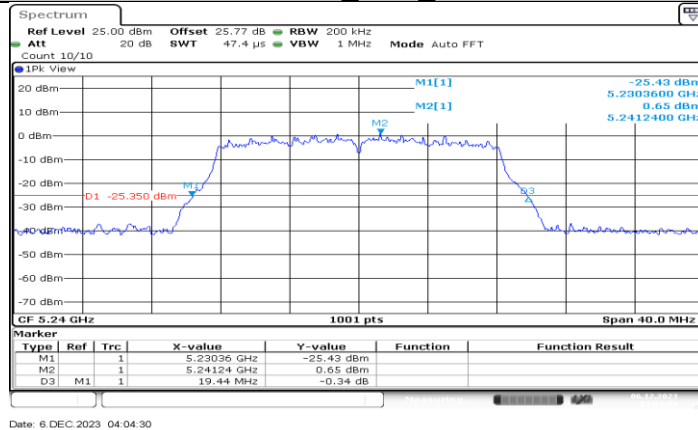

11A-CDD_Ant2_5240

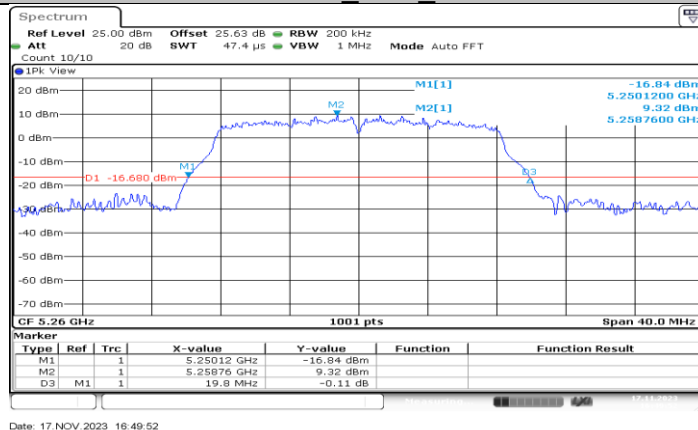


11A-CDD_Ant1_5260

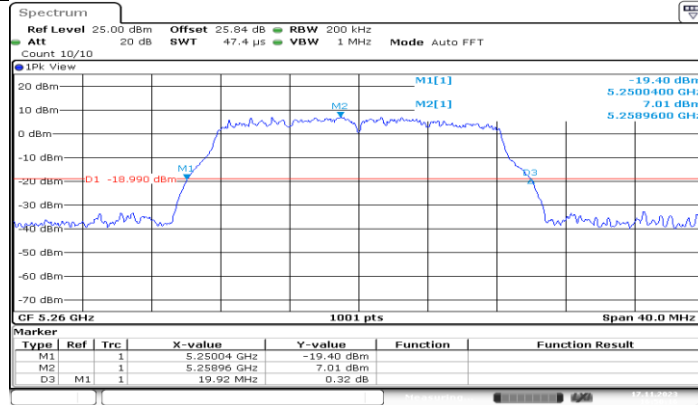


Date: 17 NOV 2023 16:50:17

11A-CDD_Ant2_5260

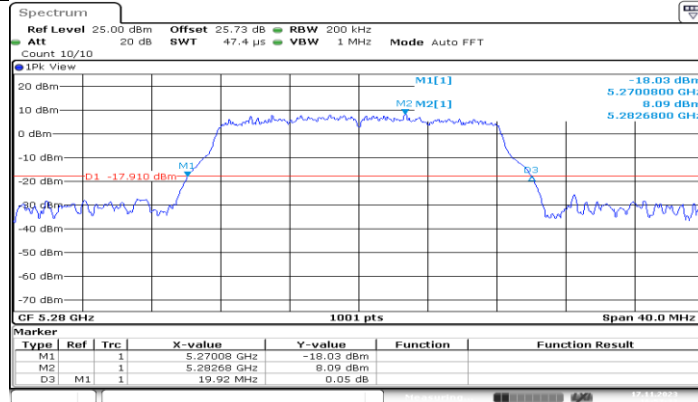


Date: 17 NOV 2023 16:57:23

11A-CDD_Ant1_5280

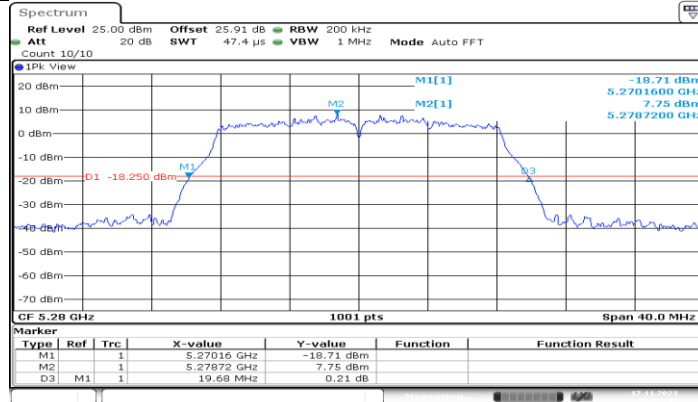


Date: 17 NOV 2023 16:57:48


11A-CDD_Ant2_5280

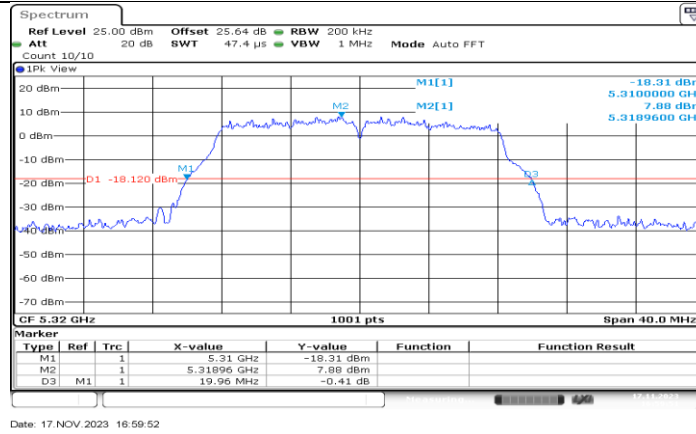


11A-CDD_Ant1_5320

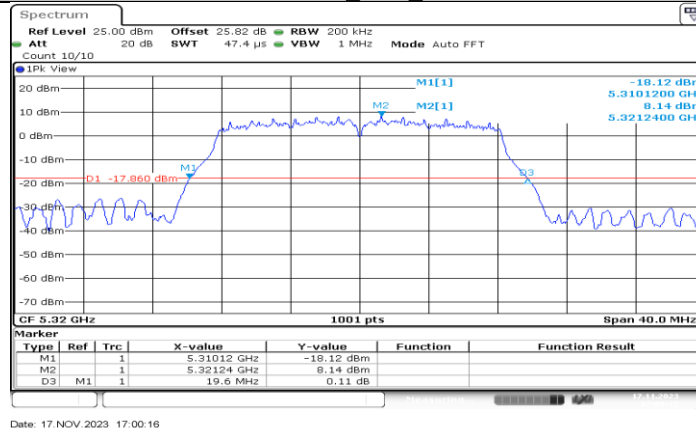


11A-CDD_Ant2_5320

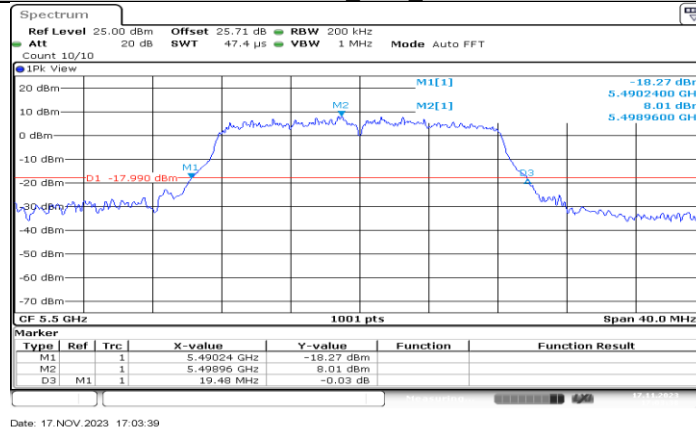

11A-CDD_Ant1_5500

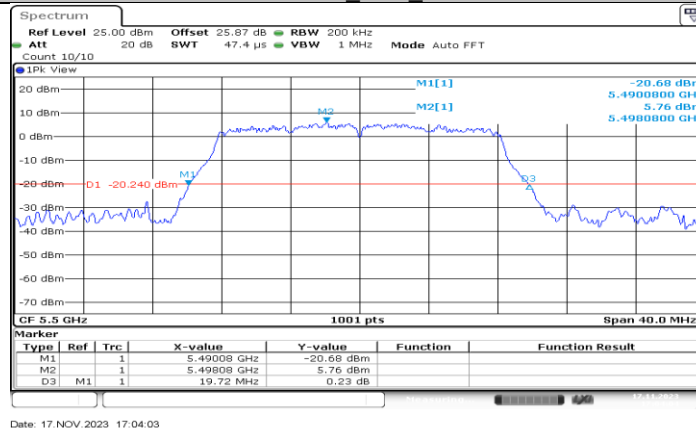


11A-CDD_Ant2_5500

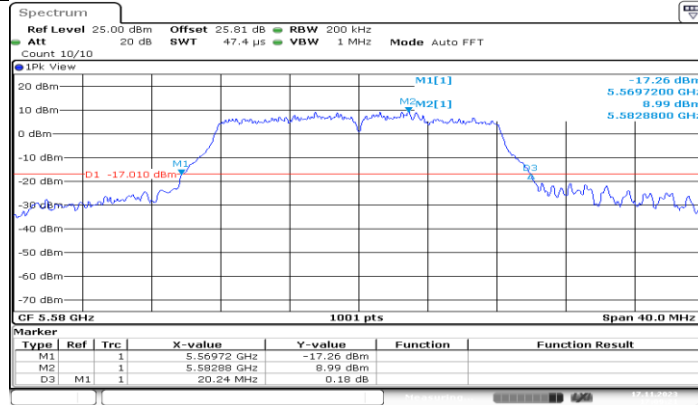


Date: 17 NOV 2023 17:09:21

11A-CDD_Ant1_5580

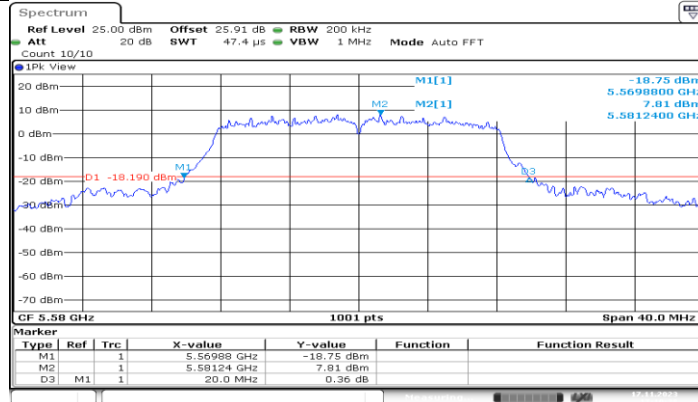


Date: 17 NOV 2023 17:10:38

11A-CDD_Ant2_5580

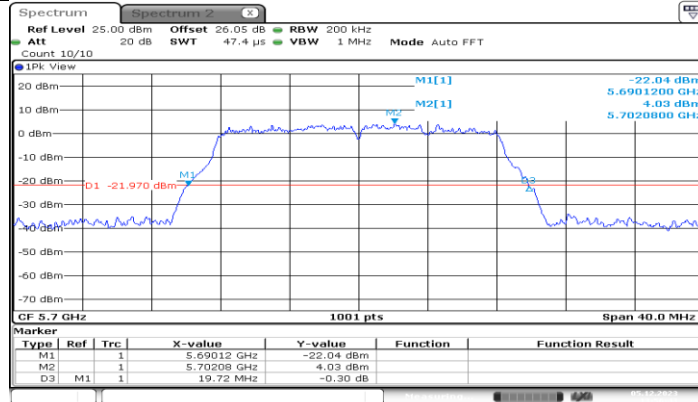


Date: 5 DEC 2023 13:56:44


11A-CDD_Ant1_5700

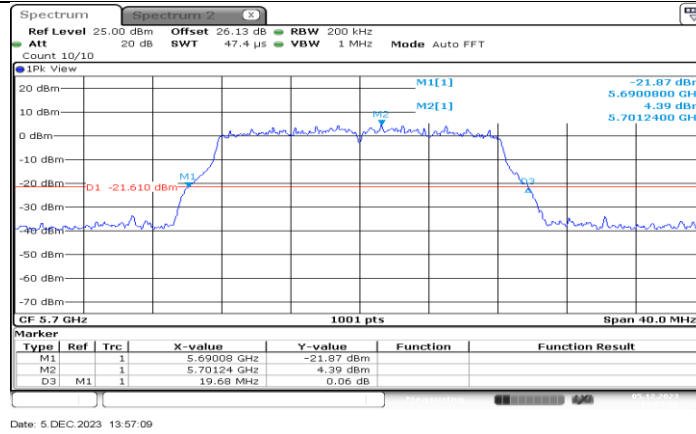


11A-CDD Ant2 5700

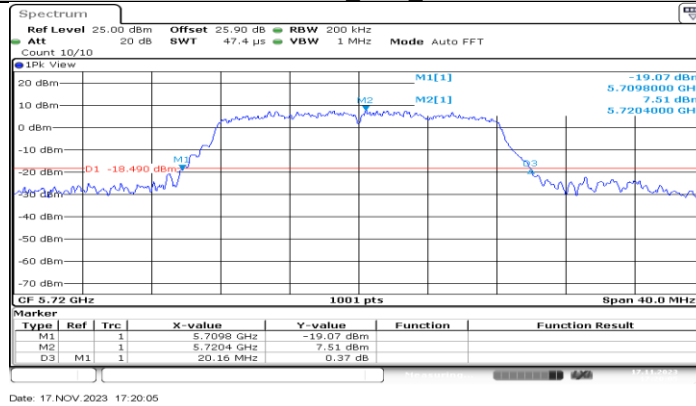


11A-CDD Ant1 5720

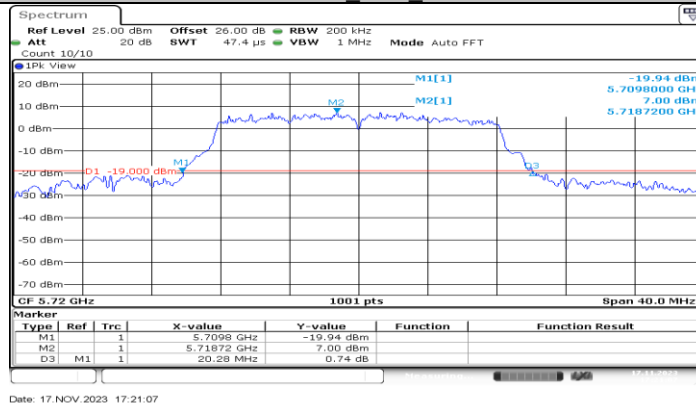


11A-CDD Ant2 5720

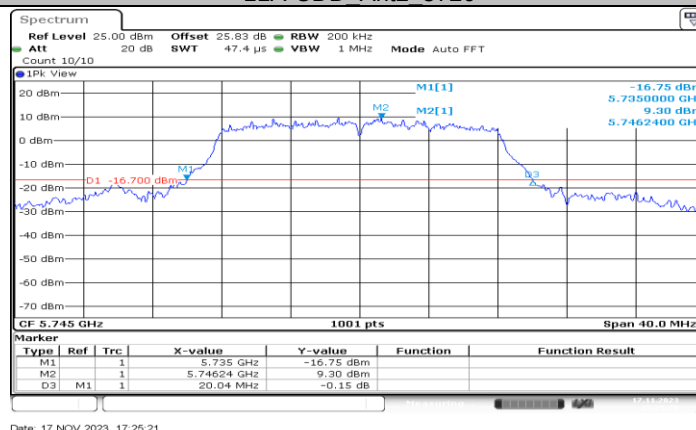


11A-CDD Ant1 5745

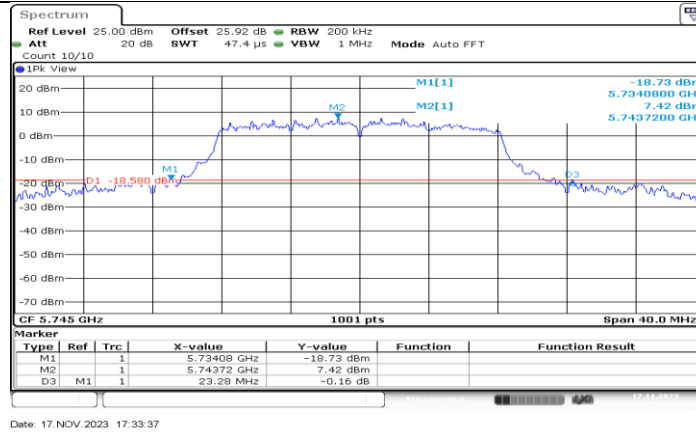


11A-CDD_Ant2_5745

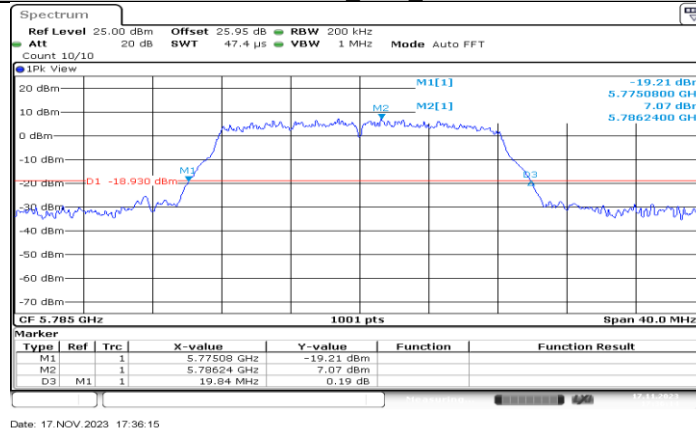


11A-CDD_Ant1_5785

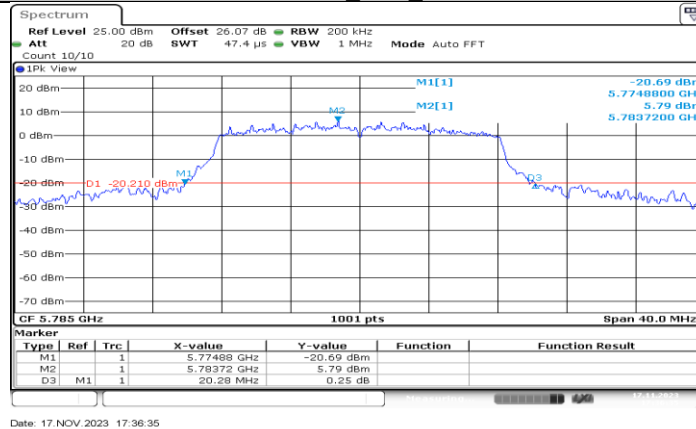

11A-CDD_Ant2_5785

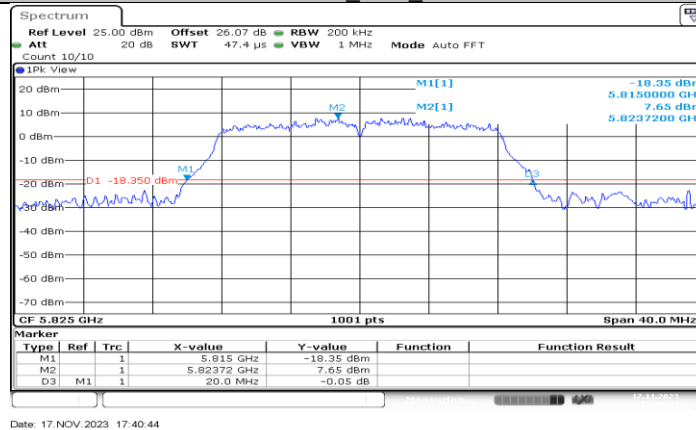


11A-CDD_Ant1_5825

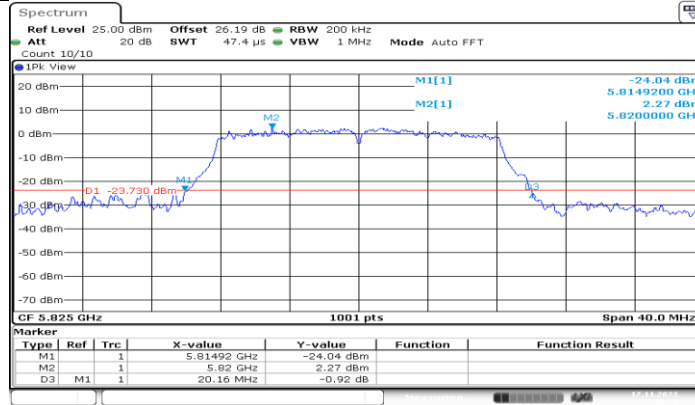


Date: 17 NOV 2023 17:42:59

11A-CDD_Ant2_5825

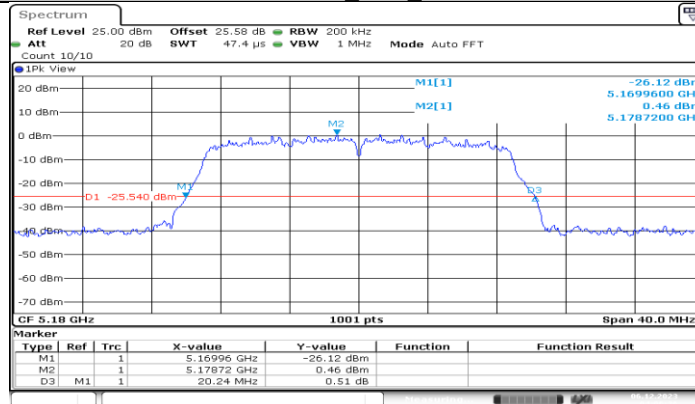


Date: 6 DEC 2023 04:06:26

11N20MIMO_Ant1_5180

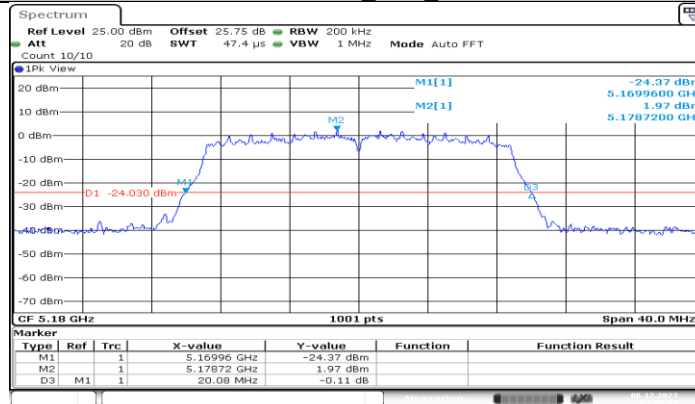


Date: 6 DEC 2023 04:07:03


11N20MIMO_Ant2_5180

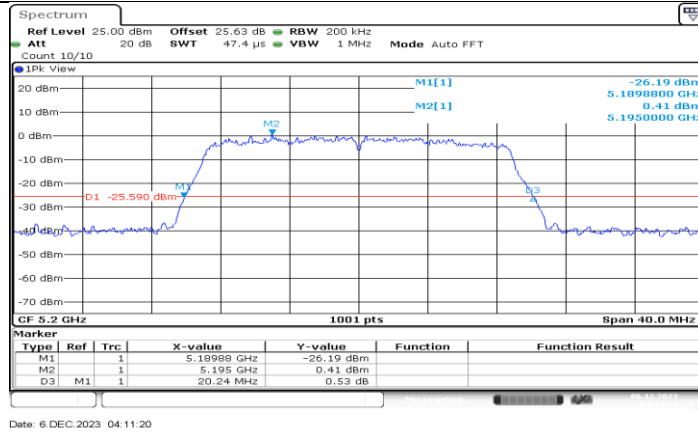


11N20MIMO Ant1 5200

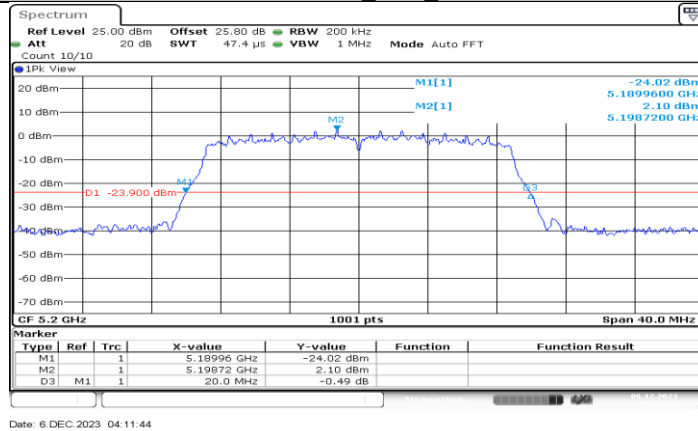


11N20MIMO Ant2 5200

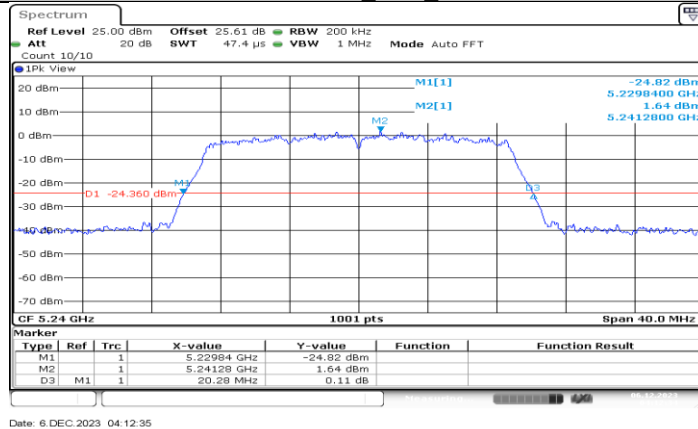

11N20MIMO Ant1 5240

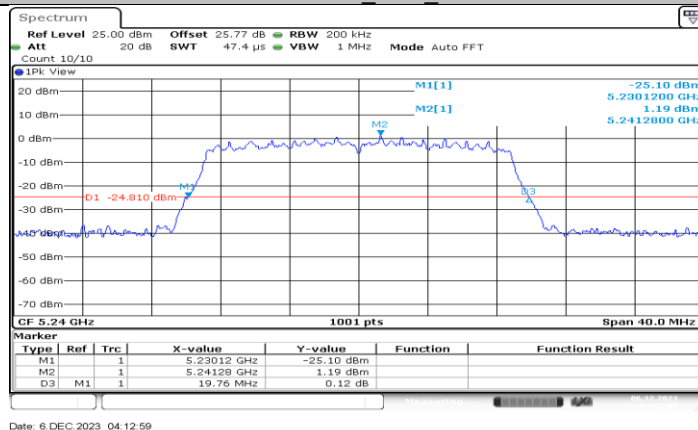


11N20MIMO_Ant2_5240

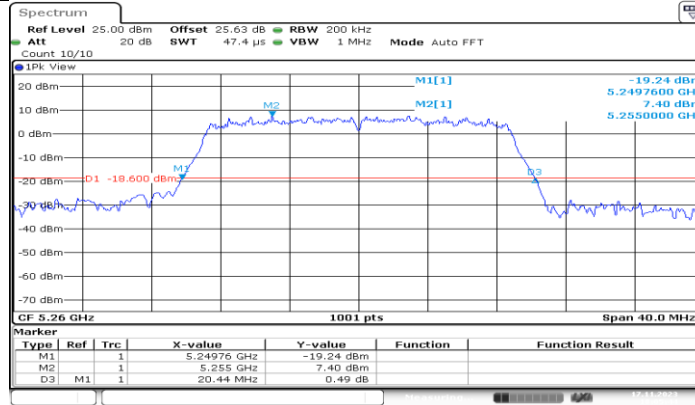


Date: 17 NOV 2023 18:05:44

11N20MIMO_Ant1_5260

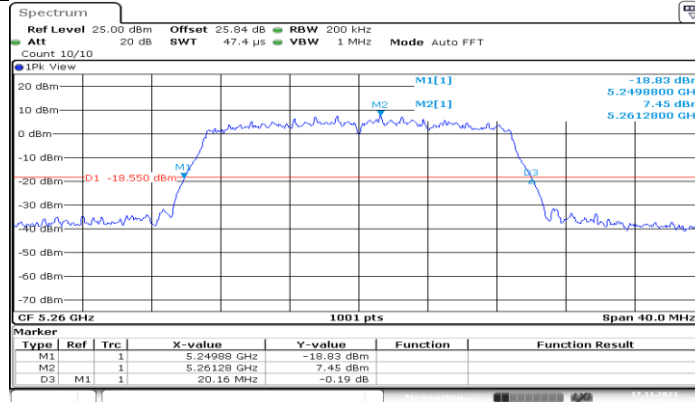


Date: 17 NOV 2023 18:05:57

11N20MIMO_Ant2_5260

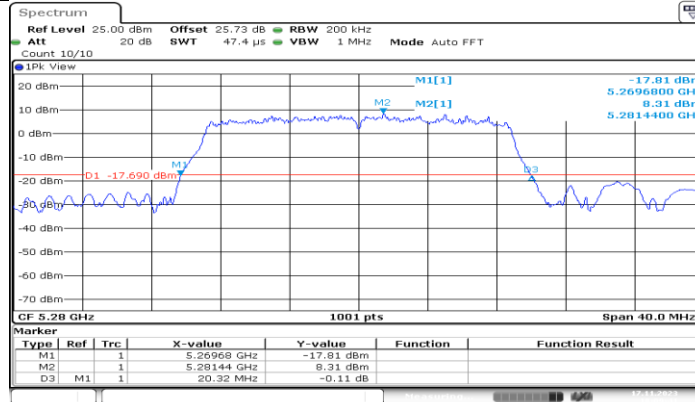


Date: 17 NOV 2023 18:09:42


11N20MIMO_Ant1_5280

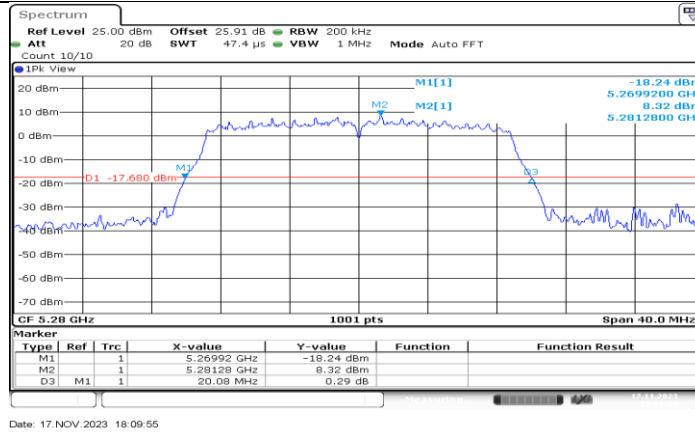


11N20MIMO Ant2 5280

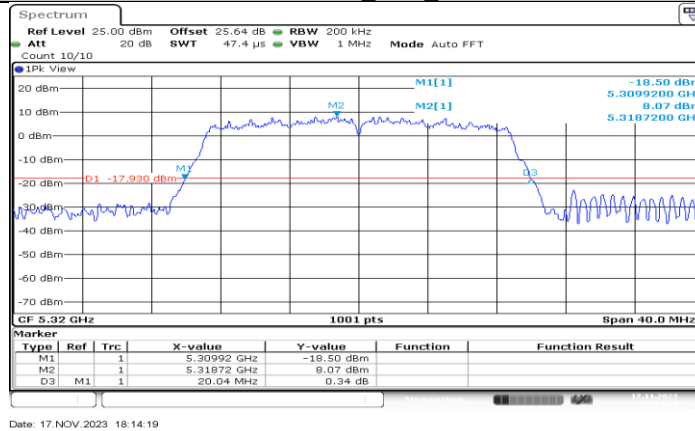


11N20MIMO Ant1 5320

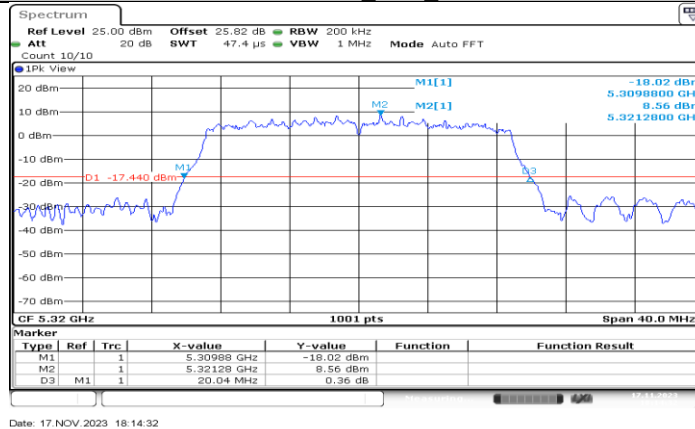

11N20MIMO Ant2 5320

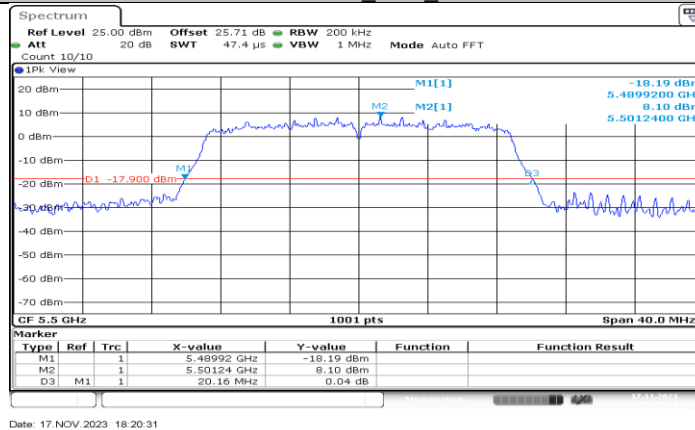


11N20MIMO_Ant1_5500

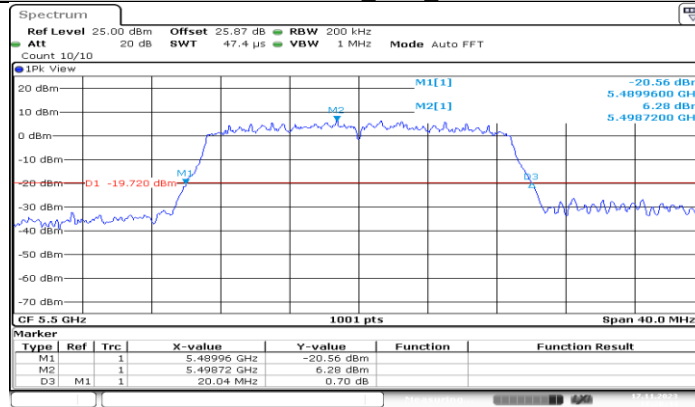


Date: 17 NOV 2023 18:20:44

11N20MIMO_Ant2_5500

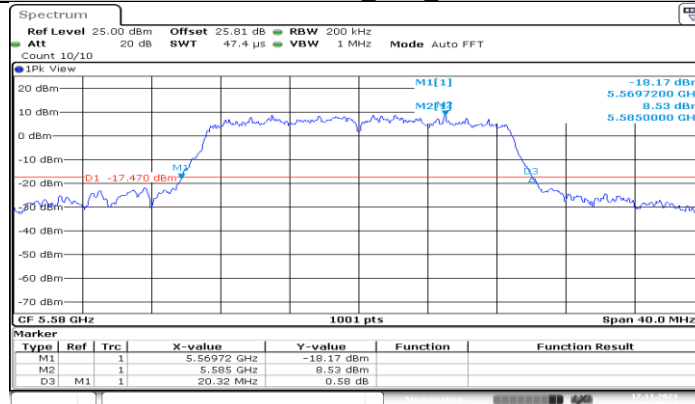


Date: 17 NOV 2023 18:30:19

11N20MIMO_Ant1_5580

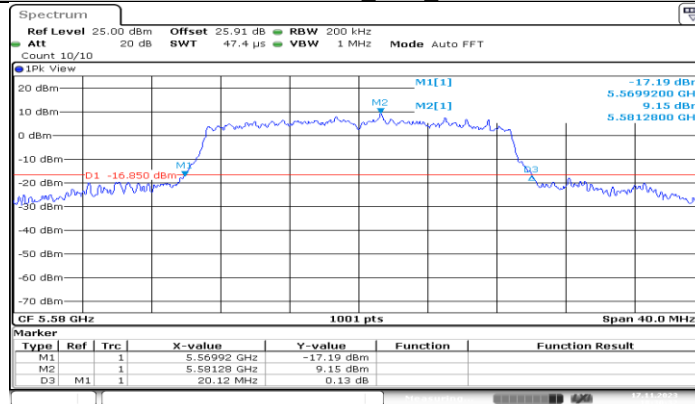


Date: 17 NOV 2023 18:30:32


11N20MIMO_Ant2_5580

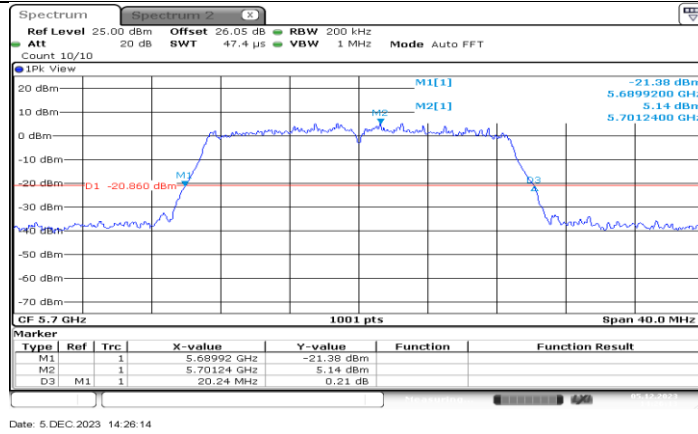


11N20MIMO Ant1 5700

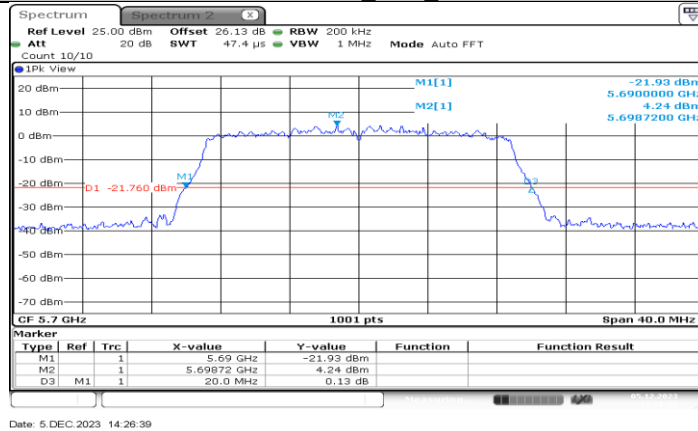


11N20MIMO Ant2 5700

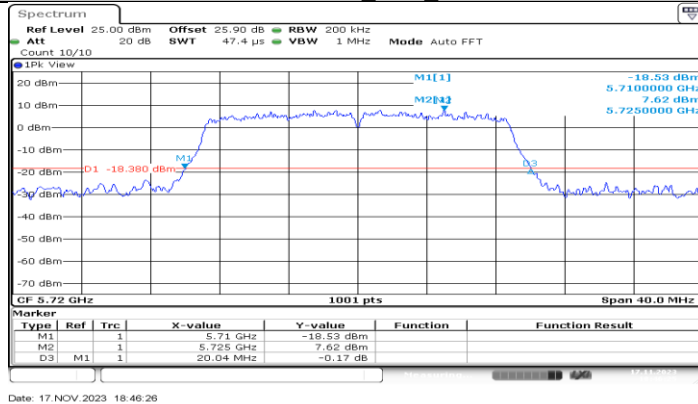

11N20MIMO Ant1 5720

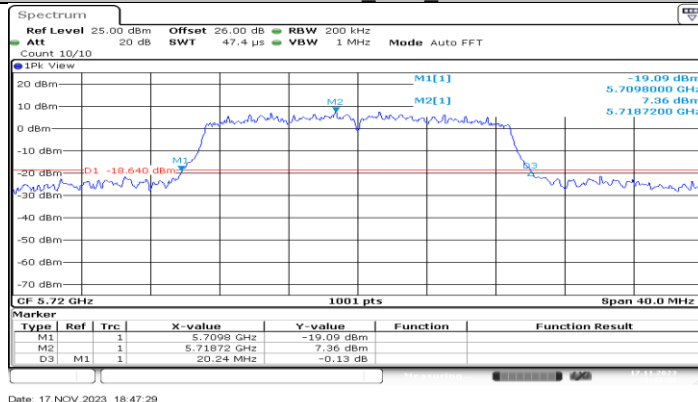


11N20MIMO Ant2 5720

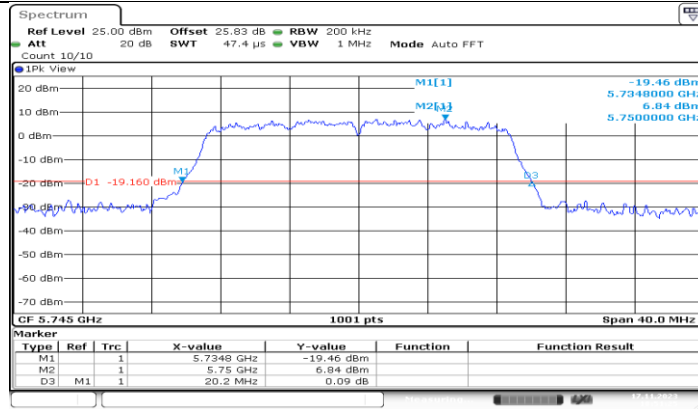


Date: 17 NOV 2023 18:51:25

11N20MIMO Ant1 5745

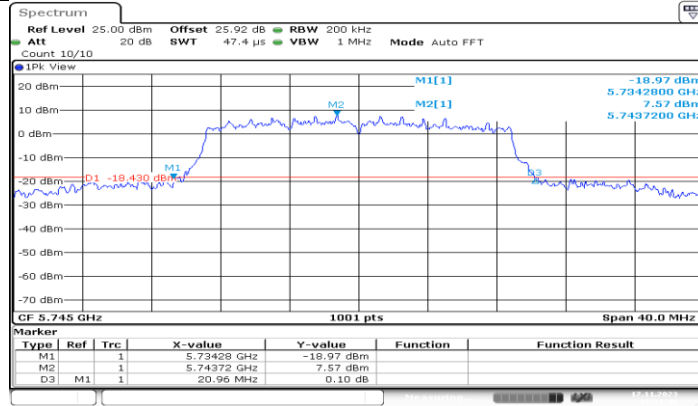


Date: 17 NOV 2023 18:51:46

11N20MIMO Ant2 5745

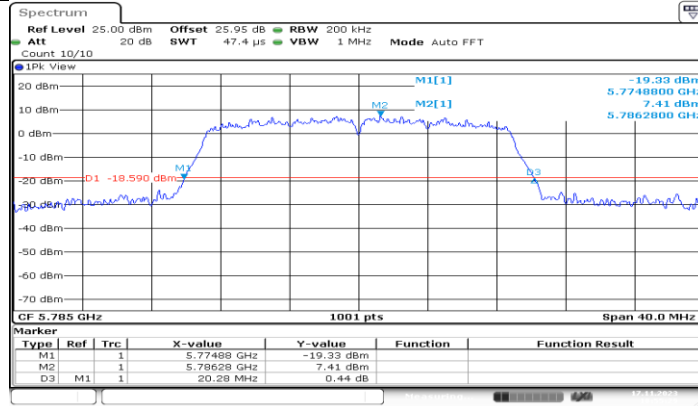


Date: 17 NOV 2023 18:55:29

11N20MIMO Ant1 5785

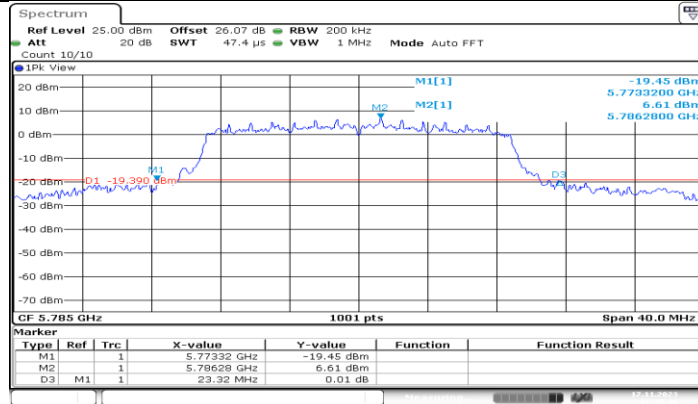


Date: 17 NOV 2023 18:55:50

11N20MIMO_Ant2_5785

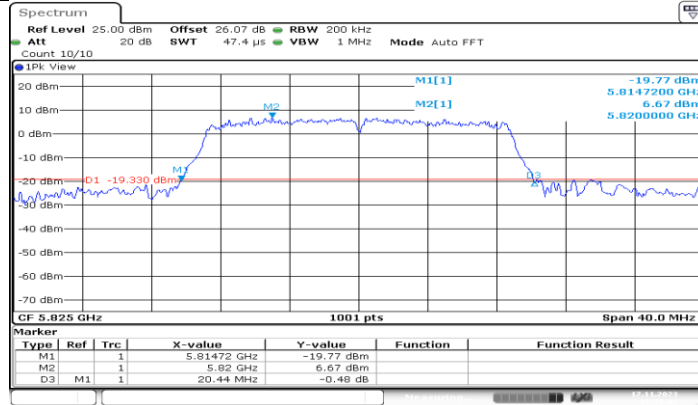


Date: 17 NOV 2023 18:59:02

11N20MIMO_Ant1_5825

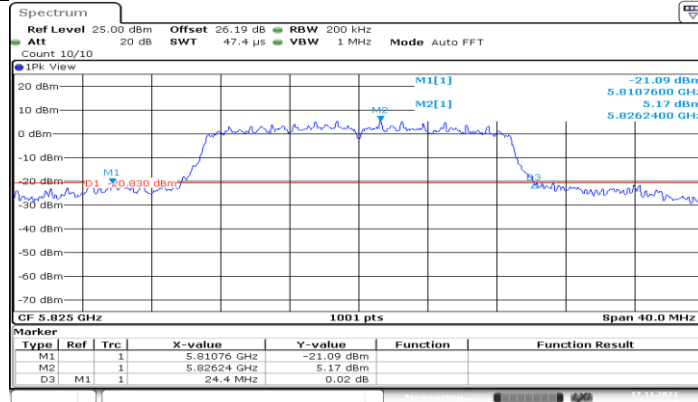


Date: 17 NOV 2023 18:59:23

11N20MIMO_Ant2_5825

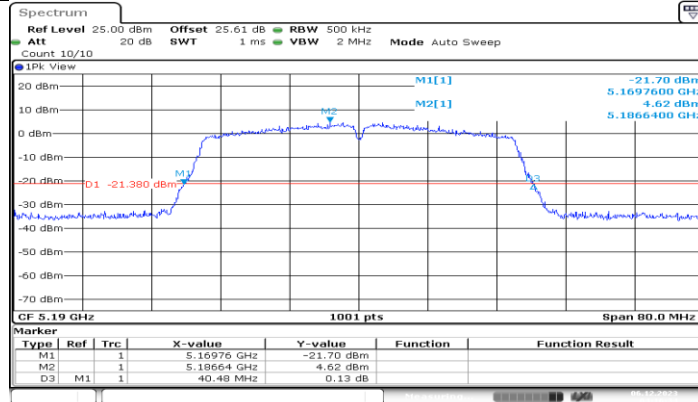


Date: 6 DEC 2023 04:16:33


11N40MIMO_Ant1_5190

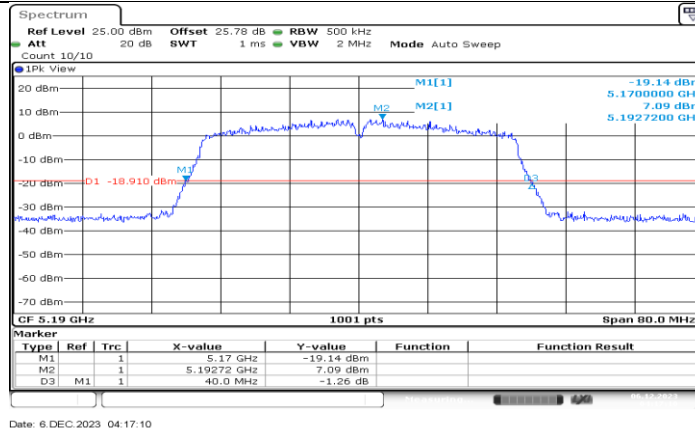


11N40MIMO Ant2 5190

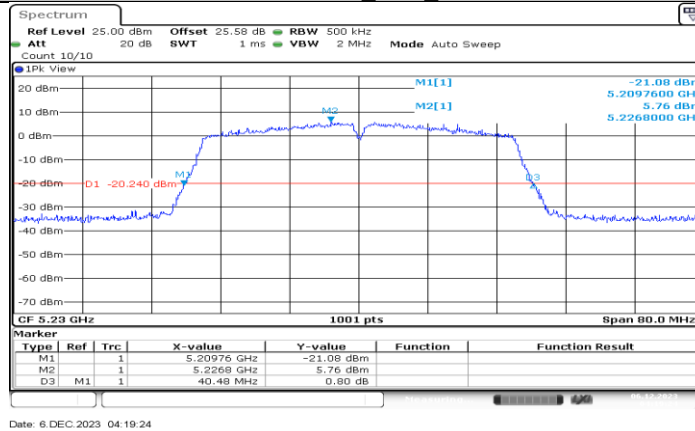



11N40MIMO Ant1 5230

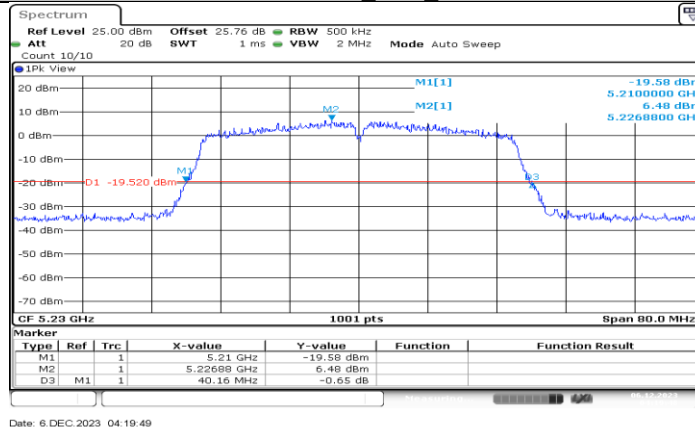


11N40MIMO Ant2 5230

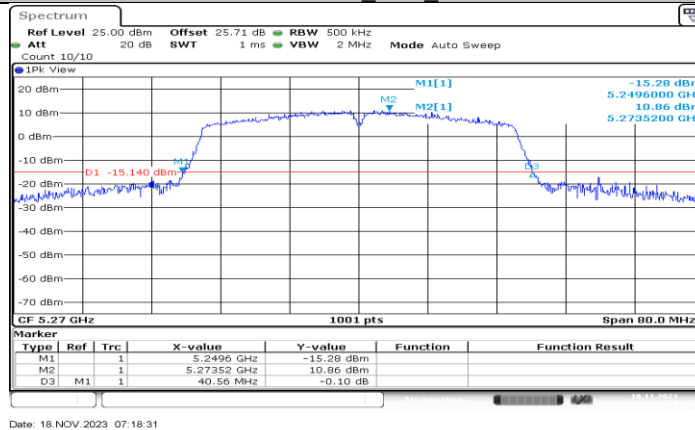

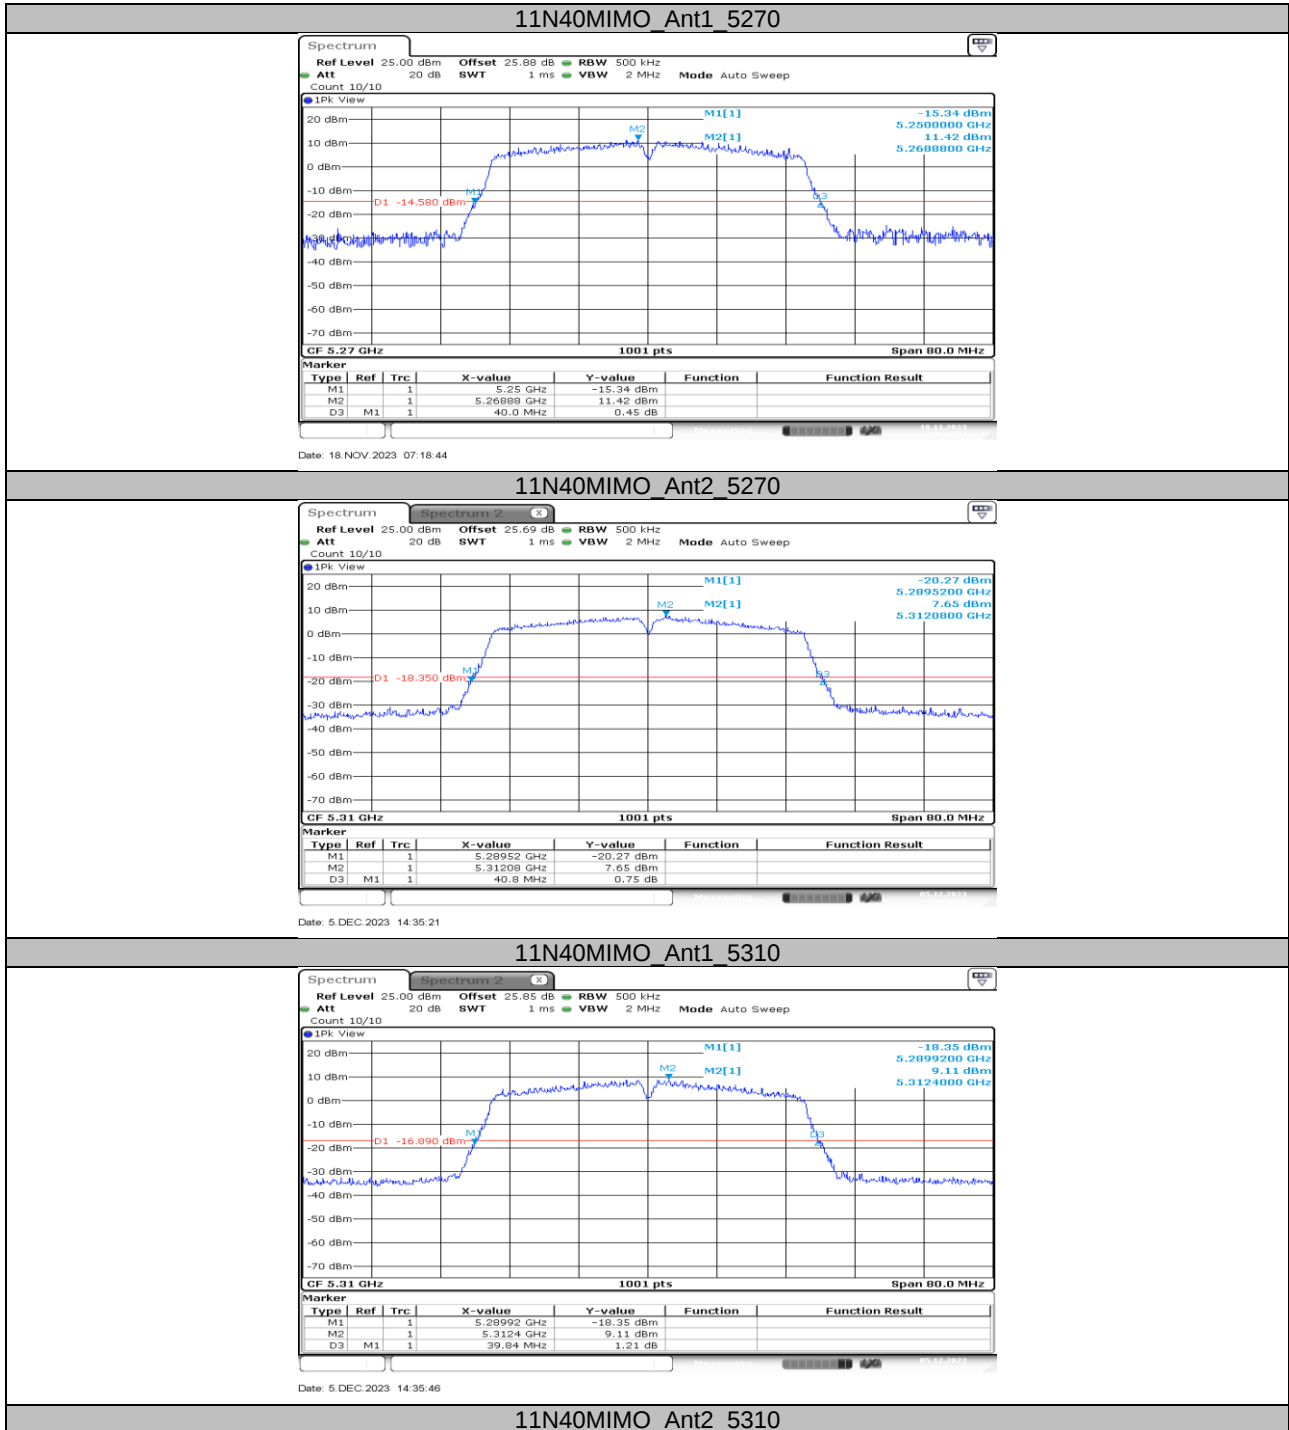


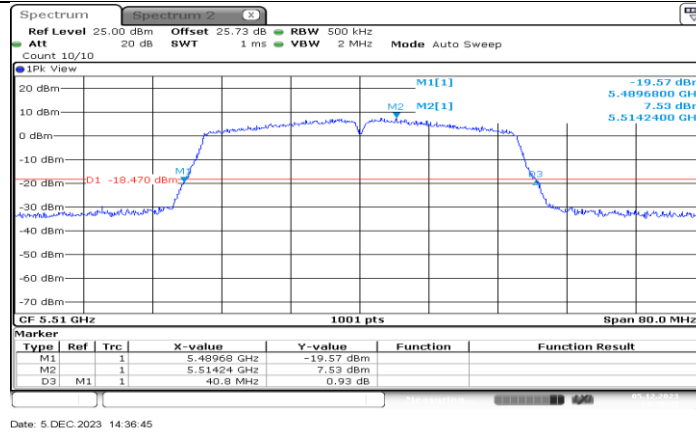

11N40MIMO Ant1 5510

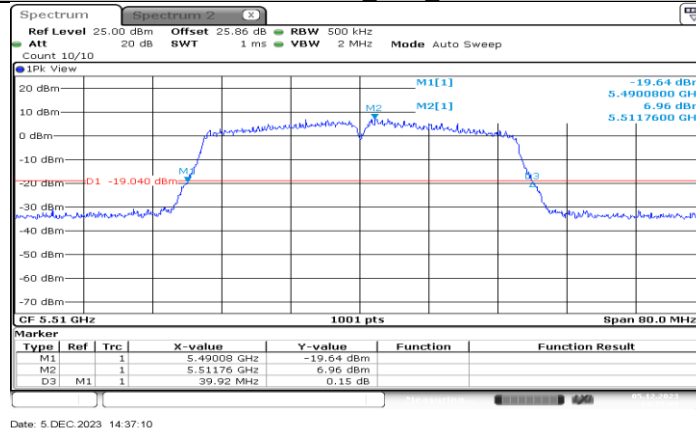

11N40MIMO Ant2 5510

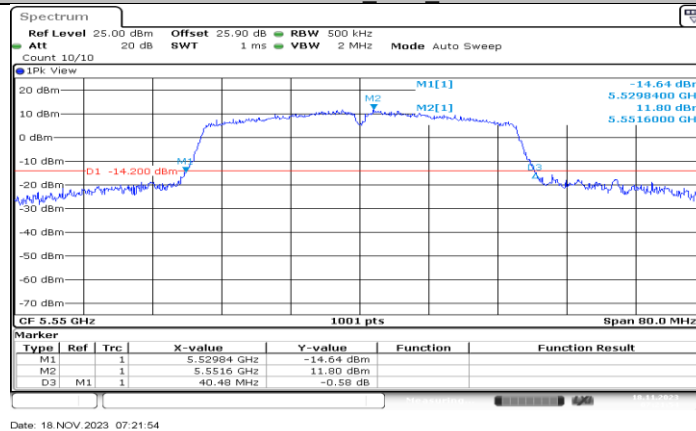

11N40MIMO Ant1 5550

