




EGPRS1900 Channel=512

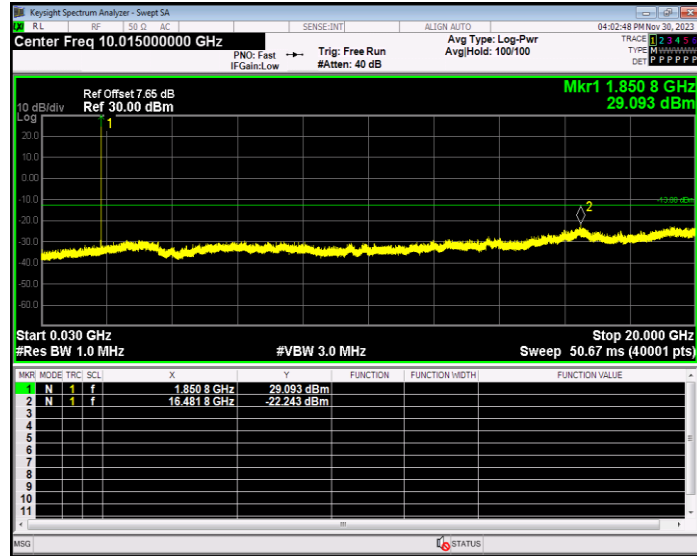

EGPRS1900 Channel=661

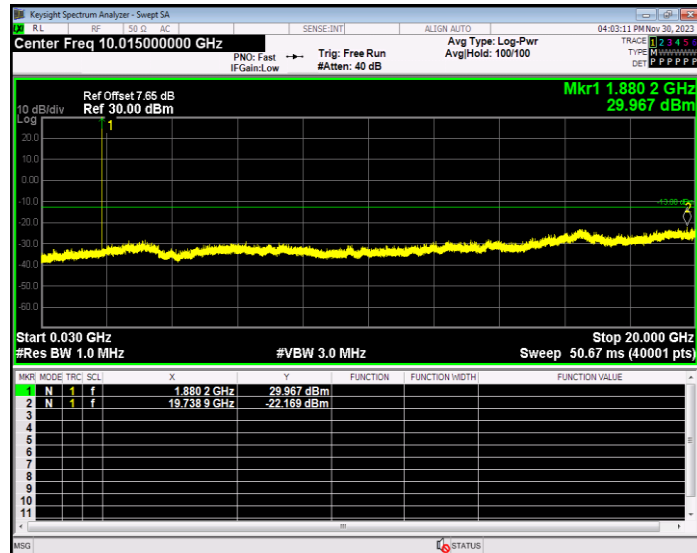

EGPRS1900 Channel=810

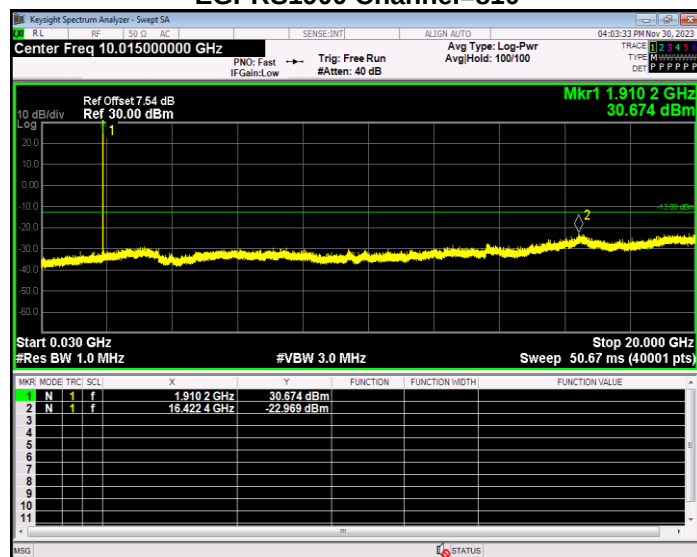

RADIATED SPURIOUS EMISSION

GSM 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.31	-33.84	7.40	4.75	-31.19	-13.00	-18.19	H
2472.70	-31.03	8.20	8.39	-31.22	-13.00	-18.22	H
3296.88	-24.69	7.20	11.79	-29.28	-13.00	-16.28	H
1648.15	-27.09	7.40	4.75	-24.44	-13.00	-11.44	V
2472.58	-29.77	8.20	8.39	-29.96	-13.00	-16.96	V
3296.63	-23.56	7.20	11.79	-28.15	-13.00	-15.15	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.94	-34.20	7.40	4.76	-31.56	-13.00	-18.56	H
2509.55	-32.12	8.20	8.40	-32.32	-13.00	-19.32	H
3346.36	-29.23	7.20	11.80	-33.83	-13.00	-20.83	H
1673.27	-30.41	7.40	4.75	-27.76	-13.00	-14.76	V
2509.81	-29.23	8.20	8.39	-29.42	-13.00	-16.42	V
3346.13	-23.98	7.20	11.82	-28.60	-13.00	-15.60	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.27	-33.77	7.40	4.77	-31.14	-13.00	-18.14	H
2546.30	-33.36	8.20	8.50	-33.66	-13.00	-20.66	H
3395.21	-26.12	7.20	11.90	-30.82	-13.00	-17.82	H
1697.40	-26.82	7.40	4.77	-24.19	-13.00	-11.19	V
2546.38	-29.02	8.20	8.50	-29.32	-13.00	-16.32	V
3395.33	-24.49	7.20	11.90	-29.19	-13.00	-16.19	V

GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.20	-35.06	7.40	4.75	-32.41	-13.00	-19.41	H
2472.58	-31.15	8.20	8.39	-31.34	-13.00	-18.34	H
3296.80	-29.31	7.20	11.79	-33.90	-13.00	-20.90	H
1648.09	-28.66	7.40	4.75	-26.01	-13.00	-13.01	V
2472.61	-29.05	8.20	8.39	-29.24	-13.00	-16.24	V
3296.63	-23.23	7.20	11.79	-27.82	-13.00	-14.82	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.16	-31.80	7.40	4.76	-29.16	-13.00	-16.16	H
2509.85	-33.02	8.20	8.40	-33.22	-13.00	-20.22	H
3346.42	-28.28	7.20	11.80	-32.88	-13.00	-19.88	H
1673.08	-29.18	7.40	4.75	-26.53	-13.00	-13.53	V
2509.88	-29.70	8.20	8.39	-29.89	-13.00	-16.89	V
3346.29	-25.69	7.20	11.82	-30.31	-13.00	-17.31	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.59	-35.30	7.40	4.77	-32.67	-13.00	-19.67	H
2546.43	-33.08	8.20	8.50	-33.38	-13.00	-20.38	H
3394.86	-24.52	7.20	11.90	-29.22	-13.00	-16.22	H
1697.51	-29.15	7.40	4.77	-26.52	-13.00	-13.52	V
2546.32	-29.09	8.20	8.50	-29.39	-13.00	-16.39	V
3395.33	-22.74	7.20	11.90	-27.44	-13.00	-14.44	V

EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.31	-33.08	7.40	4.75	-30.43	-13.00	-17.43	H
2472.62	-29.43	8.20	8.39	-29.62	-13.00	-16.62	H
3296.44	-25.24	7.20	11.79	-29.83	-13.00	-16.83	H
1648.19	-29.95	7.40	4.75	-27.30	-13.00	-14.30	V
2472.69	-29.98	8.20	8.39	-30.17	-13.00	-17.17	V
3296.59	-21.49	7.20	11.79	-26.08	-13.00	-13.08	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.10	-32.56	7.40	4.76	-29.92	-13.00	-16.92	H
2509.80	-29.89	8.20	8.40	-30.09	-13.00	-17.09	H
3346.19	-29.22	7.20	11.80	-33.82	-13.00	-20.82	H
1673.15	-30.32	7.40	4.75	-27.67	-13.00	-14.67	V
2509.62	-30.45	8.20	8.39	-30.64	-13.00	-17.64	V
3346.36	-21.25	7.20	11.82	-25.87	-13.00	-12.87	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.27	-32.17	7.40	4.77	-29.54	-13.00	-16.54	H
2546.24	-30.86	8.20	8.50	-31.16	-13.00	-18.16	H
3395.03	-25.73	7.20	11.90	-30.43	-13.00	-17.43	H
1697.21	-29.22	7.40	4.77	-26.59	-13.00	-13.59	V
2546.52	-29.05	8.20	8.50	-29.35	-13.00	-16.35	V
3394.91	-23.84	7.20	11.90	-28.54	-13.00	-15.54	V

PCS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.26	-25.70	7.00	12.93	-31.63	-13.00	-18.63	H
5550.53	-24.87	8.40	17.11	-33.58	-13.00	-20.58	H
7400.58	-24.02	8.30	22.20	-37.92	-13.00	-24.92	H
3700.51	-24.26	7.00	12.93	-30.19	-13.00	-17.19	V
5550.69	-26.24	8.40	17.11	-34.95	-13.00	-21.95	V
7400.55	-19.72	8.30	22.20	-33.62	-13.00	-20.62	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.91	-26.07	7.00	12.93	-32.00	-13.00	-19.00	H
5639.82	-26.61	8.40	17.11	-35.32	-13.00	-22.32	H
7519.91	-25.68	8.30	22.20	-39.58	-13.00	-26.58	H
3759.99	-21.73	7.00	12.93	-27.66	-13.00	-14.66	V
5639.86	-22.04	8.40	17.11	-30.75	-13.00	-17.75	V
7520.08	-24.15	8.30	22.20	-38.05	-13.00	-25.05	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.24	-25.66	7.00	12.93	-31.59	-13.00	-18.59	H
5729.35	-23.22	8.40	17.11	-31.93	-13.00	-18.93	H
7638.94	-26.32	8.30	22.20	-40.22	-13.00	-27.22	H
3819.71	-24.28	7.00	12.93	-30.21	-13.00	-17.21	V
5729.27	-21.87	8.40	17.11	-30.58	-13.00	-17.58	V
7639.17	-20.03	8.30	22.20	-33.93	-13.00	-20.93	V

GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.25	-25.94	7.00	12.93	-31.87	-13.00	-18.87	H
5550.20	-23.81	8.40	17.11	-32.52	-13.00	-19.52	H
7400.73	-27.74	8.30	22.20	-41.64	-13.00	-28.64	H
3700.30	-21.07	7.00	12.93	-27.00	-13.00	-14.00	V
5550.48	-24.02	8.40	17.11	-32.73	-13.00	-19.73	V
7400.59	-19.25	8.30	22.20	-33.15	-13.00	-20.15	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.09	-24.16	7.00	12.93	-30.09	-13.00	-17.09	H
5639.97	-26.46	8.40	17.11	-35.17	-13.00	-22.17	H
7520.29	-27.42	8.30	22.20	-41.32	-13.00	-28.32	H
3760.33	-23.93	7.00	12.93	-29.86	-13.00	-16.86	V
5640.20	-24.39	8.40	17.11	-33.10	-13.00	-20.10	V
7520.20	-23.61	8.30	22.20	-37.51	-13.00	-24.51	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.34	-28.37	7.00	12.93	-34.30	-13.00	-21.30	H
5729.46	-23.69	8.40	17.11	-32.40	-13.00	-19.40	H
7638.89	-27.26	8.30	22.20	-41.16	-13.00	-28.16	H
3819.35	-22.27	7.00	12.93	-28.20	-13.00	-15.20	V
5729.11	-24.50	8.40	17.11	-33.21	-13.00	-20.21	V
7639.25	-21.70	8.30	22.20	-35.60	-13.00	-22.60	V

EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.21	-24.07	7.00	12.93	-30.00	-13.00	-17.00	H
5550.44	-23.22	8.40	17.11	-31.93	-13.00	-18.93	H
7400.79	-25.00	8.30	22.20	-38.90	-13.00	-25.90	H
3700.32	-25.24	7.00	12.93	-31.17	-13.00	-18.17	V
5550.67	-23.78	8.40	17.11	-32.49	-13.00	-19.49	V
7400.98	-23.43	8.30	22.20	-37.33	-13.00	-24.33	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.04	-24.90	7.00	12.93	-30.83	-13.00	-17.83	H
5640.11	-23.53	8.40	17.11	-32.24	-13.00	-19.24	H
7519.99	-24.14	8.30	22.20	-38.04	-13.00	-25.04	H
3760.28	-22.99	7.00	12.93	-28.92	-13.00	-15.92	V
5640.13	-25.75	8.40	17.11	-34.46	-13.00	-21.46	V
7520.12	-20.72	8.30	22.20	-34.62	-13.00	-21.62	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.49	-27.45	7.00	12.93	-33.38	-13.00	-20.38	H
5729.44	-24.18	8.40	17.11	-32.89	-13.00	-19.89	H
7639.12	-26.60	8.30	22.20	-40.50	-13.00	-27.50	H
3819.80	-24.11	7.00	12.93	-30.04	-13.00	-17.04	V
5729.34	-21.99	8.40	17.11	-30.70	-13.00	-17.70	V
7639.38	-23.65	8.30	22.20	-37.55	-13.00	-24.55	V

3G

Conducted output power

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dB)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
WCDMA Band2	9262	1852.4	22.88	1.6	24.48	33.01	PASS
WCDMA Band2	9400	1880	23.19	1.6	24.79	33.01	PASS
WCDMA Band2	9538	1907.6	23.38	1.6	24.98	33.01	PASS
HSDPA Band2 Subtest1	9262	1852.4	23.03	1.6	24.63	33.01	PASS
HSDPA Band2 Subtest2	9262	1852.4	22.72	1.6	24.32	33.01	PASS
HSDPA Band2 Subtest3	9262	1852.4	22.32	1.6	23.92	33.01	PASS
HSDPA Band2 Subtest4	9262	1852.4	22.24	1.6	23.84	33.01	PASS
HSDPA Band2 Subtest1	9400	1880	22.53	1.6	24.13	33.01	PASS
HSDPA Band2 Subtest2	9400	1880	22.15	1.6	23.75	33.01	PASS
HSDPA Band2 Subtest3	9400	1880	22.17	1.6	23.77	33.01	PASS
HSDPA Band2 Subtest4	9400	1880	21.93	1.6	23.53	33.01	PASS
HSDPA Band2 Subtest1	9538	1907.6	22.76	1.6	24.36	33.01	PASS
HSDPA Band2 Subtest2	9538	1907.6	22.55	1.6	24.15	33.01	PASS
HSDPA Band2 Subtest3	9538	1907.6	22.10	1.6	23.70	33.01	PASS
HSDPA Band2 Subtest4	9538	1907.6	22.07	1.6	23.67	33.01	PASS
HSUPA Band2 Subtest1	9262	1852.4	22.90	1.6	24.50	33.01	PASS
HSUPA Band2 Subtest2	9262	1852.4	22.93	1.6	24.53	33.01	PASS
HSUPA Band2 Subtest3	9262	1852.4	22.76	1.6	24.36	33.01	PASS
HSUPA Band2 Subtest4	9262	1852.4	22.81	1.6	24.41	33.01	PASS
HSUPA Band2 Subtest5	9262	1852.4	22.47	1.6	24.07	33.01	PASS
HSUPA Band2 Subtest1	9400	1880	22.42	1.6	24.02	33.01	PASS
HSUPA Band2 Subtest2	9400	1880	22.47	1.6	24.07	33.01	PASS
HSUPA Band2 Subtest3	9400	1880	22.34	1.6	23.94	33.01	PASS
HSUPA Band2 Subtest4	9400	1880	22.41	1.6	24.01	33.01	PASS
HSUPA Band2 Subtest5	9400	1880	22.30	1.6	23.90	33.01	PASS
HSUPA Band2 Subtest1	9538	1907.6	22.76	1.6	24.36	33.01	PASS
HSUPA Band2 Subtest2	9538	1907.6	22.71	1.6	24.31	33.01	PASS
HSUPA Band2 Subtest3	9538	1907.6	22.50	1.6	24.10	33.01	PASS
HSUPA Band2 Subtest4	9538	1907.6	22.70	1.6	24.30	33.01	PASS
HSUPA Band2 Subtest5	9538	1907.6	22.34	1.6	23.94	33.01	PASS

Frequency stability

UMTS Band 2 /1880MHz					
Temperature (°C)	Voltage (Volt)	Freq. Dev. (Hz)	Freq. Dev. (ppm)	Limit	Result
50	Normal Voltage	-1.76	-0.001	Within Authorized Band	PASS
40		-2.20	-0.001		
30		1.86	0.001		
20		-5.48	-0.003		
10		1.79	0.001		
0		2.19	0.001		
-10		-2.21	-0.001		
-20		1.80	0.001		
-30		-2.05	-0.001		
20	Maximum Voltage	-2.15	-0.001		
20	BEP	-1.97	-0.001		


Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
WCDMA Band2	9262	1852.4	2.99	13	PASS
WCDMA Band2	9400	1880	2.95	13	PASS
WCDMA Band2	9538	1907.6	2.94	13	PASS


WCDMA Band2 Channel=9262



WCDMA Band2 Channel=9400

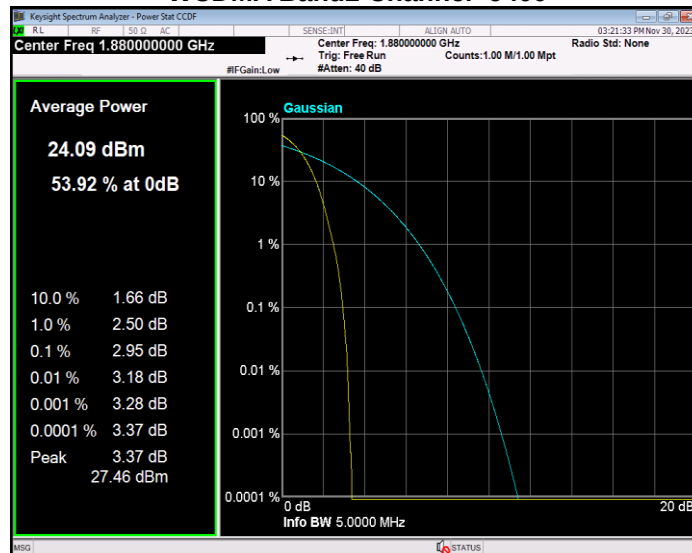


WCDMA Band2 Channel=9538

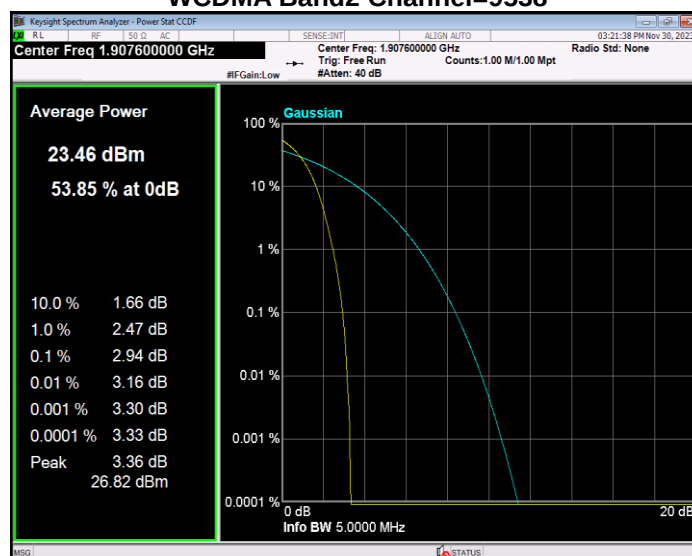


Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
WCDMA Band2	9262	1852.4	4.155	4.657	PASS
WCDMA Band2	9400	1880	4.152	4.691	PASS
WCDMA Band2	9538	1907.6	4.160	4.673	PASS


WCDMA Band2 Channel=9262

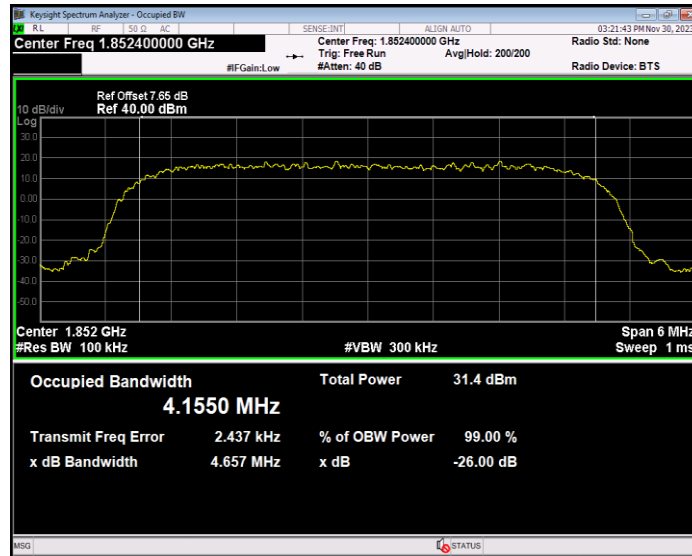

WCDMA Band2 Channel=9400

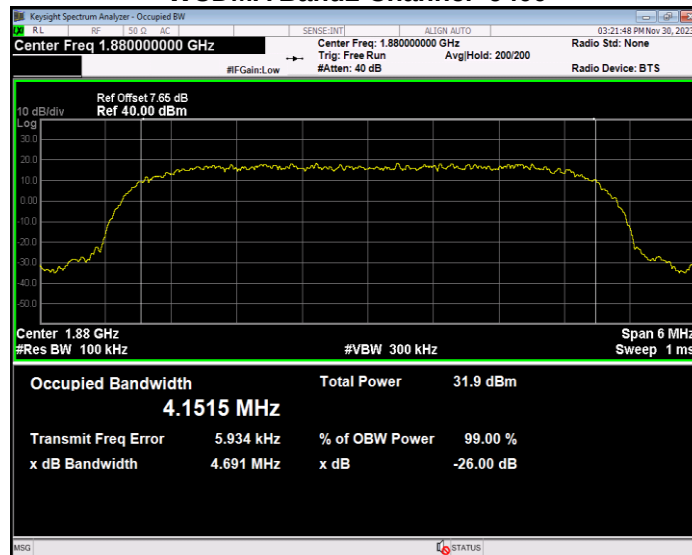


WCDMA Band2 Channel=9538

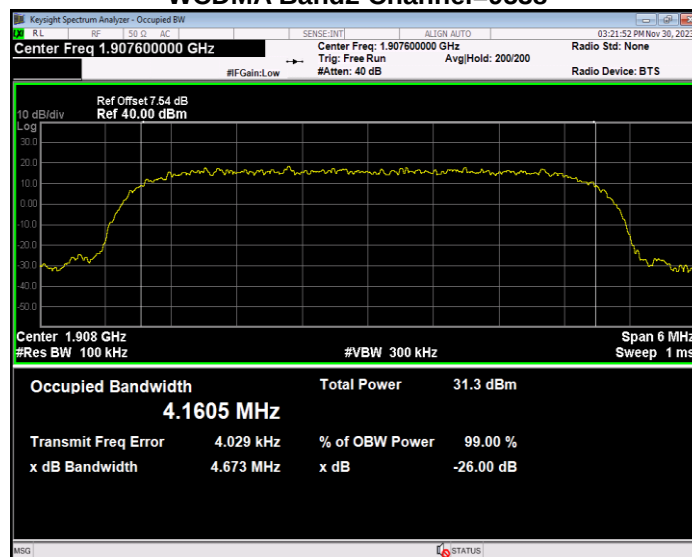

Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
WCDMA Band2	9262	1852.4	1850.00	-25.36	-13	PASS
WCDMA Band2	9538	1907.6	1910.00	-24.79	-13	PASS

WCDMA Band2 Channel=9262

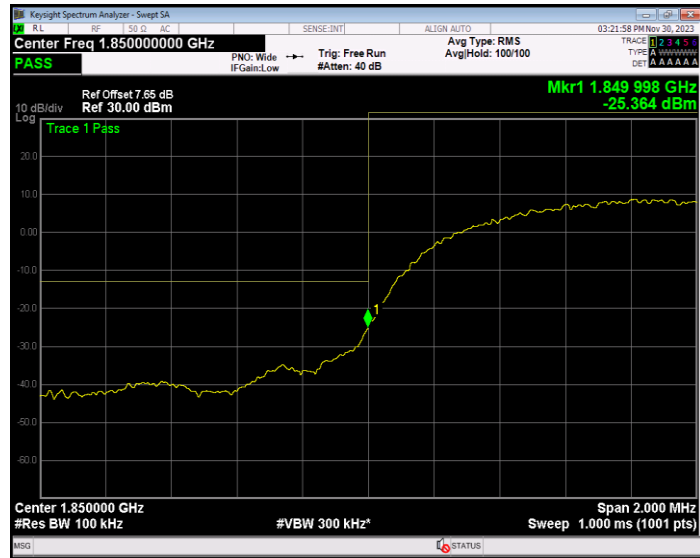


WCDMA Band2 Channel=9538




Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
WCDMA Band2	9262	1852.4	16525.22	-21.96	-13	PASS
WCDMA Band2	9400	1880	16483.78	-22.25	-13	PASS
WCDMA Band2	9538	1907.6	19408.39	-22.50	-13	PASS


WCDMA Band2 Channel=9262

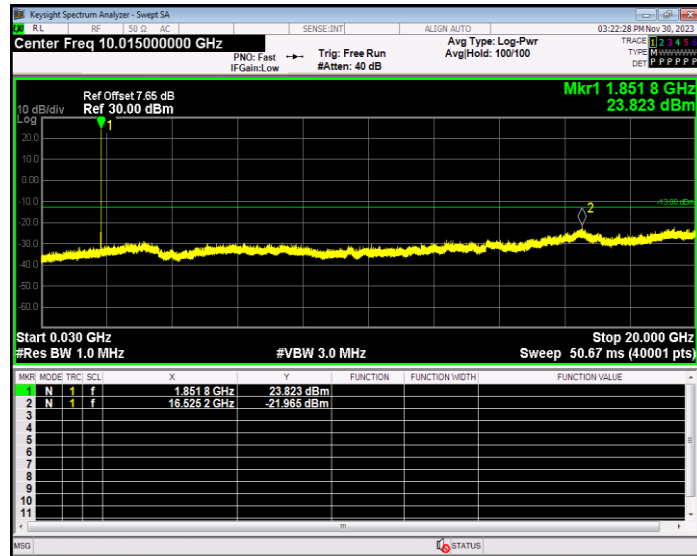

WCDMA Band2 Channel=9400

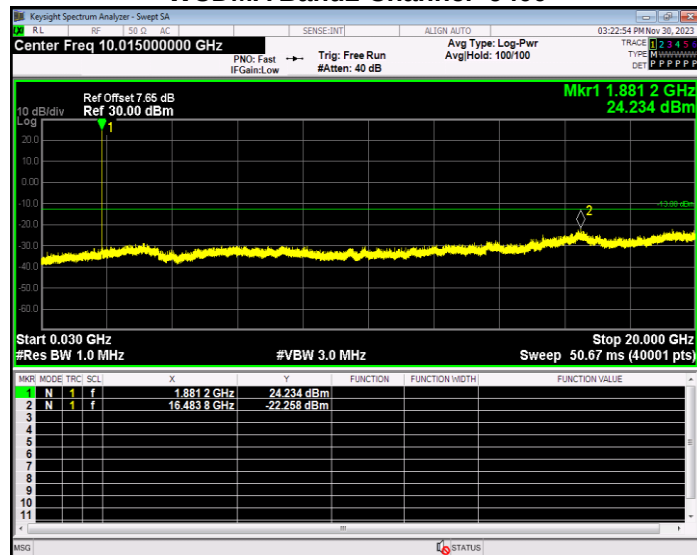

WCDMA Band2 Channel=9538

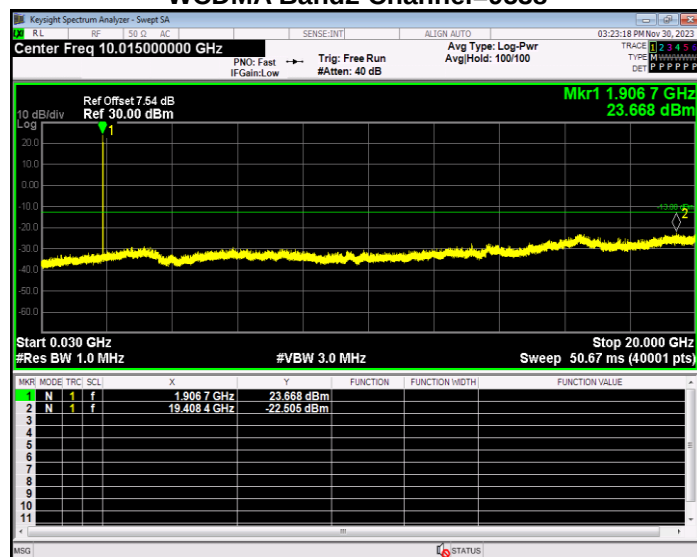

RADIATED SPURIOUS EMISSION


WCDMA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3704.06	-28.36	7.00	12.93	-34.29	-13.00	-21.29	H
5557.51	-26.56	8.20	17.11	-35.47	-13.00	-22.47	H
7409.62	-25.88	8.10	22.20	-39.98	-13.00	-26.98	H
3704.14	-28.87	7.00	12.93	-34.80	-13.00	-21.80	V
5557.23	-29.33	8.20	17.11	-38.24	-13.00	-25.24	V
7409.81	-27.60	8.10	22.20	-41.70	-13.00	-28.70	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.23	-27.56	7.00	12.93	-33.49	-13.00	-20.49	H
5640.18	-28.25	8.20	17.11	-37.16	-13.00	-24.16	H
7519.93	-28.43	8.10	22.20	-42.53	-13.00	-29.53	H
3760.10	-27.07	7.00	12.93	-33.00	-13.00	-20.00	V
5640.07	-25.39	8.20	17.11	-34.30	-13.00	-21.30	V
7520.20	-24.41	8.10	22.20	-38.51	-13.00	-25.51	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3815.35	-25.26	7.00	12.93	-31.19	-13.00	-18.19	H
5722.35	-29.11	8.20	17.11	-38.02	-13.00	-25.02	H
7630.10	-28.43	8.10	22.20	-42.53	-13.00	-29.53	H
3815.26	-25.07	7.00	12.93	-31.00	-13.00	-18.00	V
5722.18	-27.39	8.20	17.11	-36.30	-13.00	-23.30	V
7630.27	-24.41	8.10	22.20	-38.51	-13.00	-25.51	V

HSDPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3704.31	-25.02	7.00	12.93	-30.95	-13.00	-17.95	H
5557.18	-29.52	8.20	17.11	-38.43	-13.00	-25.43	H
7409.88	-28.54	8.10	22.20	-42.64	-13.00	-29.64	H
3704.22	-28.42	7.00	12.93	-34.35	-13.00	-21.35	V
5557.21	-27.48	8.20	17.11	-36.39	-13.00	-23.39	V
7409.88	-23.47	8.10	22.20	-37.57	-13.00	-24.57	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.13	-26.39	7.00	12.93	-32.32	-13.00	-19.32	H
5639.99	-30.29	8.20	17.11	-39.20	-13.00	-26.20	H
7520.16	-24.08	8.10	22.20	-38.18	-13.00	-25.18	H
3760.17	-30.01	7.00	12.93	-35.94	-13.00	-22.94	V
5640.05	-26.13	8.20	17.11	-35.04	-13.00	-22.04	V
7520.27	-25.37	8.10	22.20	-39.47	-13.00	-26.47	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3815.47	-28.45	7.00	12.93	-34.38	-13.00	-21.38	H
5722.38	-30.32	8.20	17.11	-39.23	-13.00	-26.23	H
7629.95	-24.04	8.10	22.20	-38.14	-13.00	-25.14	H
3815.72	-25.56	7.00	12.93	-31.49	-13.00	-18.49	V
5722.36	-27.06	8.20	17.11	-35.97	-13.00	-22.97	V
7629.98	-24.91	8.10	22.20	-39.01	-13.00	-26.01	V

HSUPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3704.12	-27.45	7.00	12.93	-33.38	-13.00	-20.38	H
5557.21	-26.23	8.20	17.11	-35.14	-13.00	-22.14	H
7409.61	-27.63	8.10	22.20	-41.73	-13.00	-28.73	H
3704.35	-29.44	7.00	12.93	-35.37	-13.00	-22.37	V
5557.35	-29.05	8.20	17.11	-37.96	-13.00	-24.96	V
7409.62	-25.04	8.10	22.20	-39.14	-13.00	-26.14	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.82	-29.90	7.00	12.93	-35.83	-13.00	-22.83	H
5640.04	-27.08	8.20	17.11	-35.99	-13.00	-22.99	H
7520.28	-25.56	8.10	22.20	-39.66	-13.00	-26.66	H
3760.08	-28.89	7.00	12.93	-34.82	-13.00	-21.82	V
5640.21	-27.79	8.20	17.11	-36.70	-13.00	-23.70	V
7520.15	-24.24	8.10	22.20	-38.34	-13.00	-25.34	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3815.62	-25.79	7.00	12.93	-31.72	-13.00	-18.72	H
5722.47	-29.93	8.20	17.11	-38.84	-13.00	-25.84	H
7630.29	-27.69	8.10	22.20	-41.79	-13.00	-28.79	H
3815.71	-27.85	7.00	12.93	-33.78	-13.00	-20.78	V
5722.28	-28.01	8.20	17.11	-36.92	-13.00	-23.92	V
7629.85	-23.49	8.10	22.20	-37.59	-13.00	-24.59	V

APPENDIX II- PHOTOS OF TEST SETUP

Set-up for Transmitter & Receiver Spurious Emissions, Below 1GHz

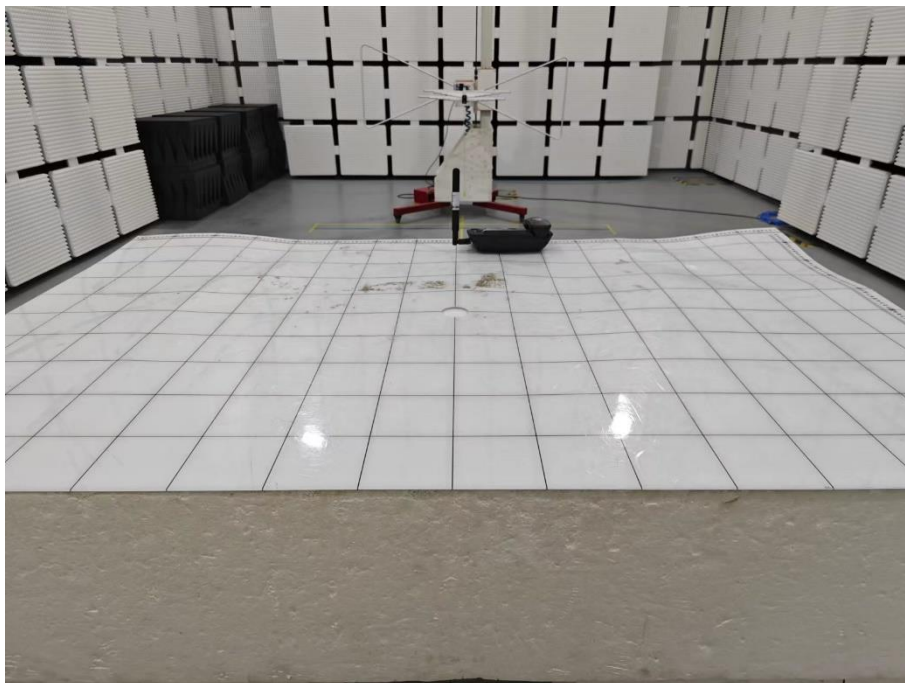

Set-up for Transmitter & Receiver Spurious Emissions, Above 1GHz



*****END OF THE REPORT*****