

承認書

SPECIFICATION FOR APPROVAL

客 戶:	鴻陽源
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
音 澤 料 號:	G43.5*0.8-20.5-0.08*105P-10T-6.3UH-L15MM+BJ
FINE P/N:	
產 品 型 號:	Φ43.5MMX0.8MM
DESC:	
日 期:	2023/10/18
DATE:	
版 本:	A.0
Version:	

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Licheng He	Li Ma	Keqing Dan	

东莞市音泽电子科技有限公司

Dongguan Yinze electronic technology Co., LTD

工廠地址：东莞市石排镇福隆教育路 40 号 D 栋 3 楼


Factory address: 3rd Floor, Building D, No.40 Fulong Education Road, Shipai Town, Dongguan City

但可清 TEL: 18617251159

SPECIFICATION

產品型號: DESC	G43.5*0.8-20.5-0.08*105P-10 T*6.3UH-L15MM+BJ_	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	鴻陽源
---------------	--	----------------	--------------------------------	-----

一、尺寸 DIMENSION:(mm)

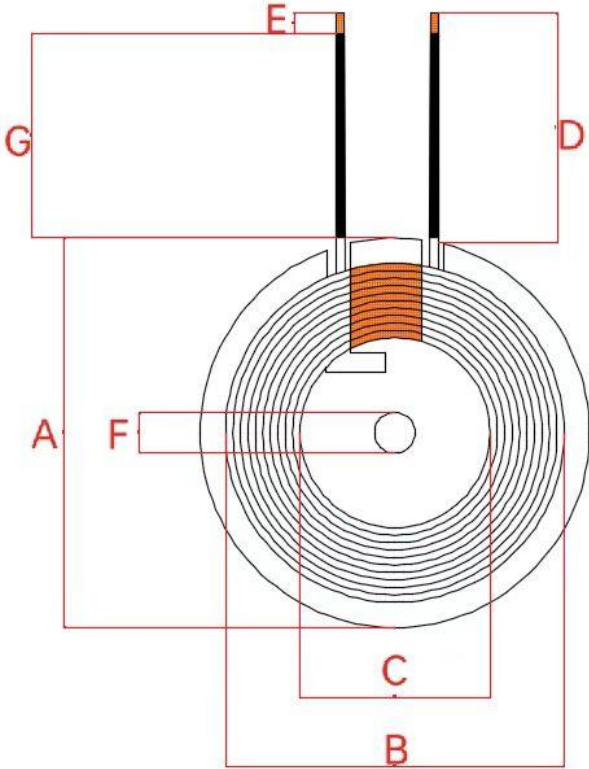

A	43.5 ± 0.5
B	41 ± 0.5
C	20.5 ± 0.5
D	15 ± 2
E	3 ± 2
F	5.3 ± 0.2
G	8 ± 1
H	
I	
K	

Note:

1. Cross out wire;
2. The coil is attached with 43.5 double-slot magnetic disc, the magnetic disc size is 43.5±0.5mm, and the thickness is 0.8±0.05mm.
3. Glue the back of the magnetic disc

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	热风线 0.08*105P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.3H ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤55m Ω		LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
何立成 2023.10.18	