

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 1 of 16

# **TEST REPORT**

Application No.:KSCR2504000676ATFCC ID:2BEY3SUD500LDAApplicant:NETPRISMA INC.

Address of Applicant: 1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES

Manufacturer: NETPRISMA INC.

Address of Manufacturer: 1301 6TH AVE, SEATTLE, WA, 98101-2304, UNITED STATES

**Equipment Under Test (EUT):** 

**EUT Name:** 5G Sub-6 GHz Smart Module with Wi-Fi 6E & Bluetooth

Model No.: SUD500-LD

Trade Mark: Vrileg

Standard(s): FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt v03

WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

**Date of Receipt:** 2025-03-12

**Date of Test:** 2025-03-16 to 2025-03-20

**Date of Issue:** 2025-07-11

Test Result: Pass\*

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 2 of 16

Revision Record				
Version	Description	Date	Remark	
00	Original	2025-04-12	/	
01	Modify Comments	2025-07-11	/	

Authorized for issue by:		
Tested By	Damon zhou	
	Damon Zhou /Project Engineer	
Approved By	Verry Hou	
	Terry Hou /Reviewer	



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 3 of 16

# 2 Test Summary

Item	Standard	Test Case ID	Result
End User Device additional requirement	96.47	/	Pass

The UUT is an End User Device. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test standards:

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt v03

WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 4 of 16

## 3 Contents

			Page
1	CO/	VER PAGE	1
2	Tes	t Summary	3
_	103	. Cummary	
3	Con	ntents	4
4	Gen	neral Information	5
	4.1	Details of E.U.T.	5
	4.2	Measurement Uncertainty	
	4.3	Description of Support Units	
	4.4	Test Location	7
	4.5	Test Facility	
	4.6	Deviation from Standards	
	4.7	Abnormalities from Standard Conditions	
5	Equ	uipment List	8
6	Too	t Method and Environment	0
O	res		
	6.1	End User Device Conformance and Performance	
	6.2	Test Environment	
	6.3	Test Requirement	
	6.4 6.5	Test Procedure	
	6.6	Test Setup Test Result	
7	Tes	t Setup Photographs	16



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 5 of 16

### 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 12V	
Sample Type:	End User device	
Transmitter Frequency Band:	LTE: Band 48	
Transmitter Frequency Bana.	5GNR: n48	
Transmitter Frequency Range:	3550~3700MHz	
Antenna Type:	External Antenna	
Hardware Version:	R1.0	
Software Version:	SUD500LDPA0301	
Antenna Gain:	-3.60dBi (Provided by the manufacturer)	
MIMO	LTE:1TX1RX	
IVIIIVIO	NR:2TX2RX	

### 4.2 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	± 7.25 x 10 <sup>-8</sup>
2	RF conducted power	± 0.75dB
3	Temperature test	± 1°C
4	Humidity test	± 3%
5	Supply voltages	± 1.5%
6	Time	± 3%



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 6 of 16

### 4.3 Description of Support Units

#### For LTE test:

1 01 = 1 = 10011				
Description	Manufacturer	Model No.	Serial No.	
EPC	Lanner Electronics Inc.	LICA-1513A	LR202002004052	
Router	TP-LINK	TL-R860+	1175379002425	
Base station	Baicells	pBS31010 (FCC ID: 2AG32PBS31010)	12020002912122B0001	

#### For 5GNR test:

Description	Manufacturer	Model No.	Serial No.	
5GC	astir	astir_5GC	A372768X0507398	
Router	TP-Link	TL-R860+	1175379002425	
Base Band Unit	BTI	sCELL- G52091NAX L603JI		
Remote Radio	BTI	RU4370	C0214921000004S	
Unit	DII	(FCC ID: WBK-RU4370)	002149210000045	



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 7 of 16

#### 4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

- 1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
- 3. Sample source: sent by customer.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

#### • FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

#### • ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

#### VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 8 of 16

# 5 Equipment List

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Laptop	Lenovo	Y510P	HFL000026	N/A	N/A
Spectrum Analyzer	KEYSIGHT	N9020A	KUS2001M00 1-2	2024/8/24	2025/8/23
Shield Room	YanChuang	N/A	KS301115-2	N/A	N/A
Coaxial Cable	Thermax	N/A	13	2024/9/16	2025/9/15
Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R.	N.C.R.
Humidity / Temperature Indicator	Renke	RS-WS-N01- 6J	1032844	2024/3/21	2025/3/20



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR250400067601

Page: 9 of 16

### 6 Test Method and Environment

#### 6.1 End User Device Conformance and Performance

Test Requirement: FCC Part 96.47

Test Method: WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

6.2 Test Environment

Environmental Conditions: 25°C, 65%RH

6.3 Test Requirement

FCC Part 96.47

a). End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

b). An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 10 of 16

#### 6.4 Test Procedure

Following procedure can be done by applying WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification, use the certified LTE Base station CBSD (FCC ID: 2AG32PBS31010) and 5GNR Base station CBSD (FCC ID: WBK-RU4370) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):

#### For LTE:

- 1. Setup with frequency 3560-3580MHz and power level 14dBm/MHz;
- 2. Enable CBSD service;
- 3. Check EUD Tx Frequency and power;
- 4. Disable AP service;
- 5. Check EUD stops transmission within 10seconds;
- 6. Setup with 3575-3595MHz & power level 8dBm/MHz;
- 7. Enable CBSD service;
- 8. Check EUD Tx Frequency and power;
- 9. Disable CBSD service;
- 10. Check EUD stops transmission within 10seconds.

#### For 5G NR:

- 1. Setup with frequency 3620-3640MHz and power level 14dBm/MHz;
- 2. Enable CBSD service;
- 3. Check EUD Tx Frequency and power;
- 4. Disable AP service;
- 5. Check EUD stops transmission within 10seconds;
- 6. Setup with 3650-3670MHz & power level 8dBm/MHz;
- 7. Enable CBSD service;
- 8. Check EUD Tx Frequency and power;
- 9. Disable CBSD service;
- 10. Check EUD stops transmission within 10seconds.




CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 11 of 16

### 6.5 Test Setup

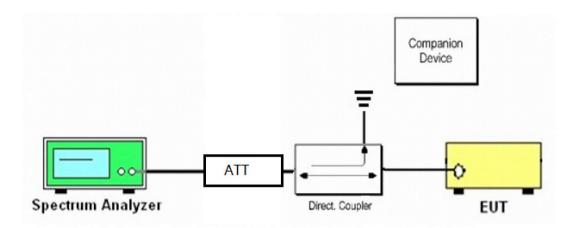

For LTE:

End User Device as UUT, the companion device is certified CBRS (FCC ID: 2AG32PBS31010)

For 5G NR:

End User Device as UUT, the companion device is certified CBRS (FCC ID: WBK-RU4370)




CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 12 of 16

#### 6.6 Test Result

For LTE

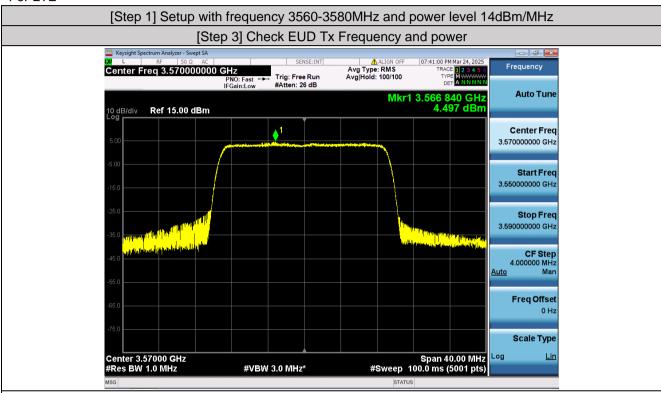

EIRP PSD=4.497-3.60+4.5=5.397dBm/MHz, Antenna gain is -3.60dBi, the path loss is 4.5dB [Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.





CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 13 of 16

## [Step 6] Setup with frequency 3575-3595MHz and power level 8dBm/MHz [Step 8] Check EUD Tx Frequency and power Center Freq 3.585000000 GHz Trig: Free Run #Atten: 26 dB Auto Tune Mkr1 3.591 384 GHz -2.130 dBm Ref 15.00 dBm 3.585000000 GHz **(1**) Start Freq 3.565000000 GHz Stop Freq 3.605000000 GHz **CF Step** 4.000000 MHz Freq Offset Scale Type Center 3.58500 GHz #Res BW 1.0 MHz Span 40.00 MHz #Sweep 100.0 ms (5001 pts) #VBW 3.0 MHz\*

EIRP PSD=-2.130-3.60+4.5=-1.230dBm/MHz, Antenna gain is -3.60dBi, the path loss is 4.5dB

[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.






CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 14 of 16

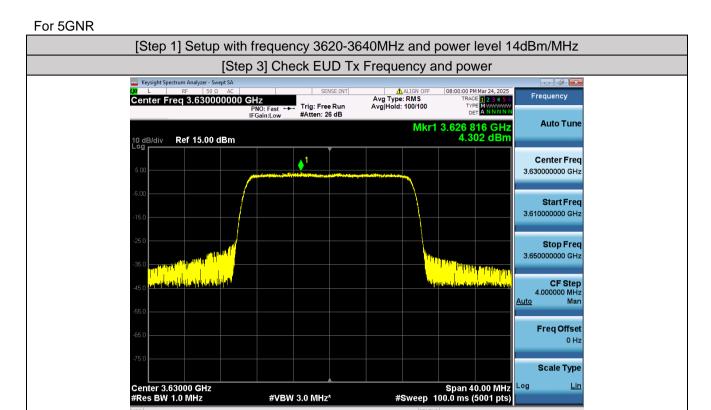

EIRP PSD=4.302-3.60+4.5+3=8.202dBm/MHz, Antenna gain is -3.60dBi,the path loss is 4.5dB, the MIMO Factor is 3dB

[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.






CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 15 of 16

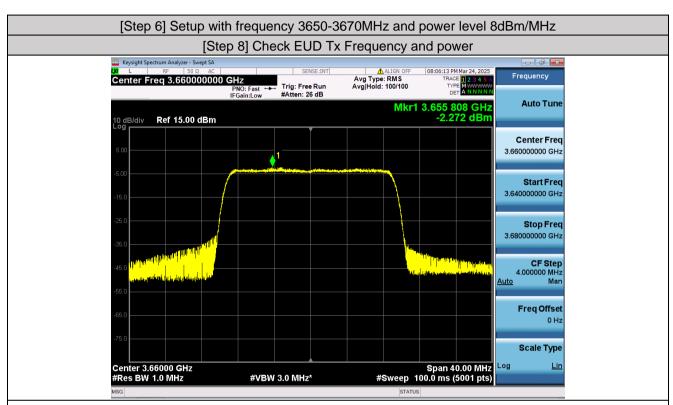

EIRP PSD=-2.272-3.60 +4.5+3=1.628dBm/MHz, Antenna gain is -3.60dBi,the path loss is 4.5dB, the MIMO Factor is 3dB

[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.





CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR250400067601

Page: 16 of 16

# 7 Test Setup Photographs

Refer to Appendix - Test Setup Photo for KSCR2504000676AT.

- End of the Report -