



Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 5 V

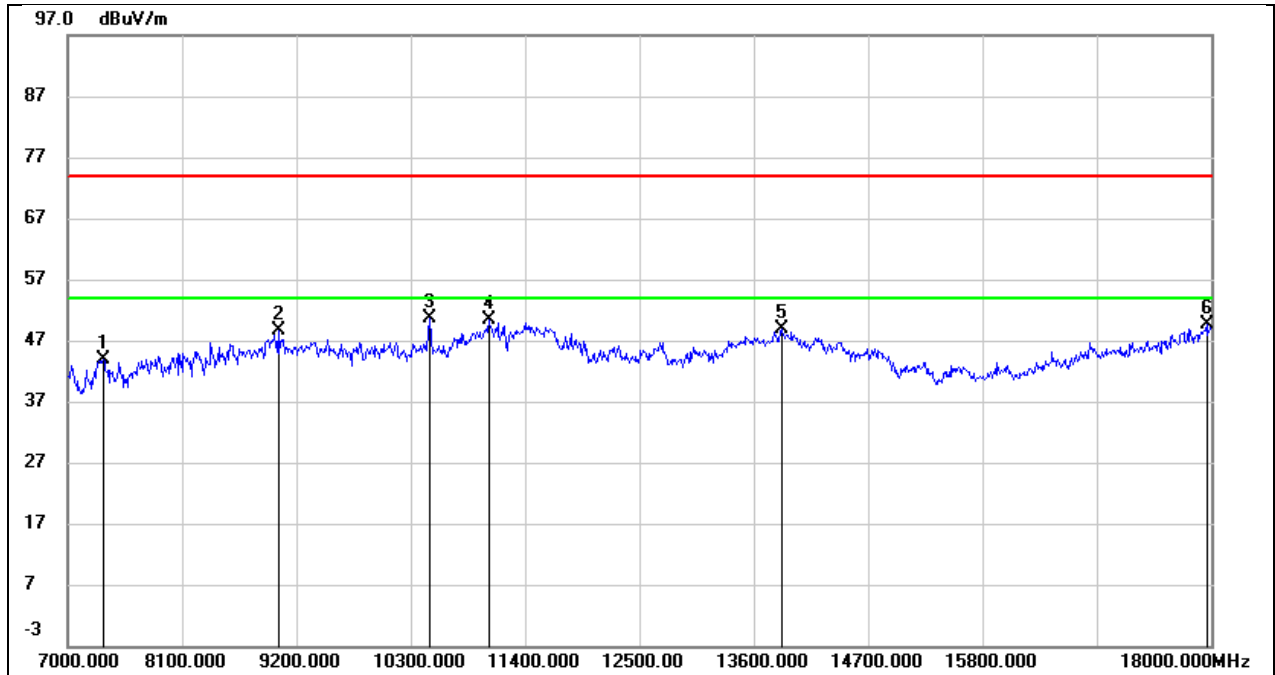


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.99	8.00	43.99	74.00	-30.01	peak
2	9024.000	37.00	11.65	48.65	74.00	-25.35	peak
3	10487.000	37.08	13.46	50.54	74.00	-23.46	peak
4	11048.000	35.31	14.99	50.30	74.00	-23.70	peak
5	13864.000	26.41	22.45	48.86	74.00	-25.14	peak
6	17956.000	22.86	26.78	49.64	74.00	-24.36	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 5 V

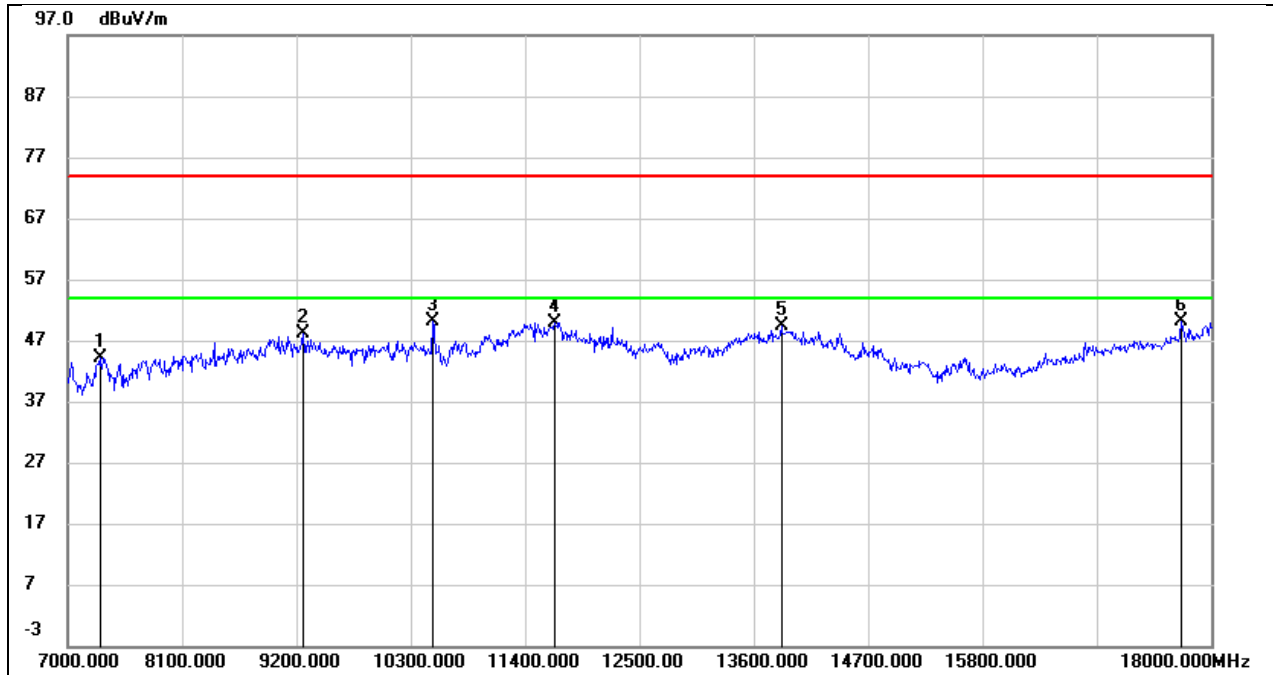


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.46	7.73	44.19	74.00	-29.81	peak
2	9266.000	37.89	10.25	48.14	74.00	-25.86	peak
3	10509.000	36.52	13.52	50.04	74.00	-23.96	peak
4	11686.000	32.74	17.25	49.99	74.00	-24.01	peak
5	13864.000	27.03	22.45	49.48	74.00	-24.52	peak
6	17714.000	24.94	25.14	50.08	74.00	-23.92	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 5 V

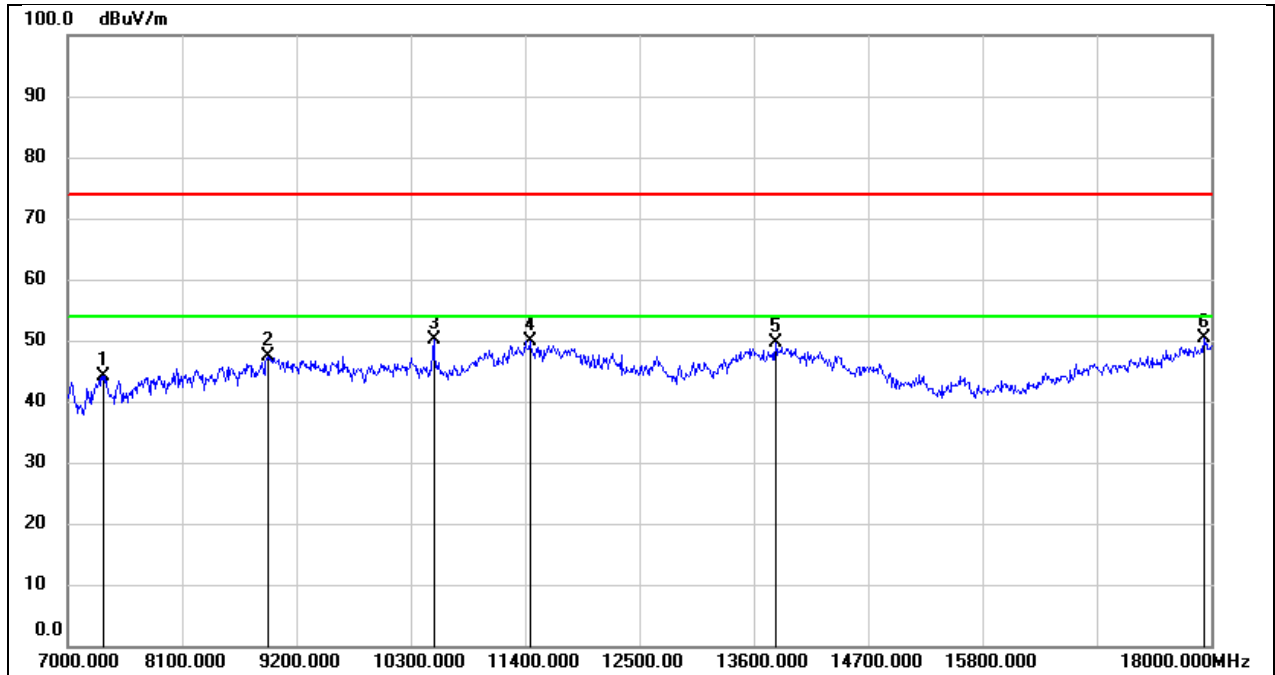


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.16	8.00	44.16	74.00	-29.84	peak
2	8925.000	36.67	10.75	47.42	74.00	-26.58	peak
3	10520.000	36.61	13.56	50.17	74.00	-23.83	peak
4	11444.000	33.05	16.71	49.76	74.00	-24.24	peak
5	13809.000	27.26	22.43	49.69	74.00	-24.31	peak
6	17934.000	23.65	26.69	50.34	74.00	-23.66	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 5 V

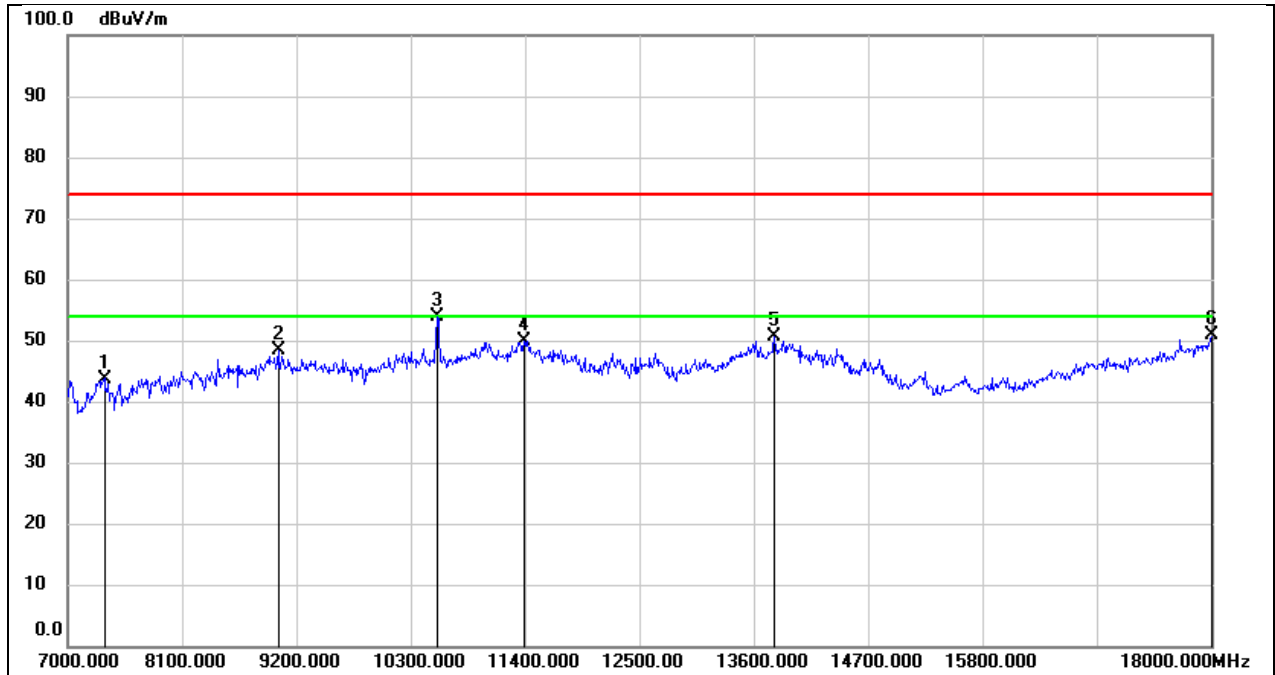


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.68	8.07	43.75	74.00	-30.25	peak
2	9024.000	36.69	11.65	48.34	74.00	-25.66	peak
3*	10553.000	40.33	13.64	53.97	68.20	-14.23	peak
4	11389.000	33.35	16.51	49.86	74.00	-24.14	peak
5	13798.000	28.29	22.41	50.70	74.00	-23.30	peak
6	18000.000	23.84	26.97	50.81	74.00	-23.19	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 5 V

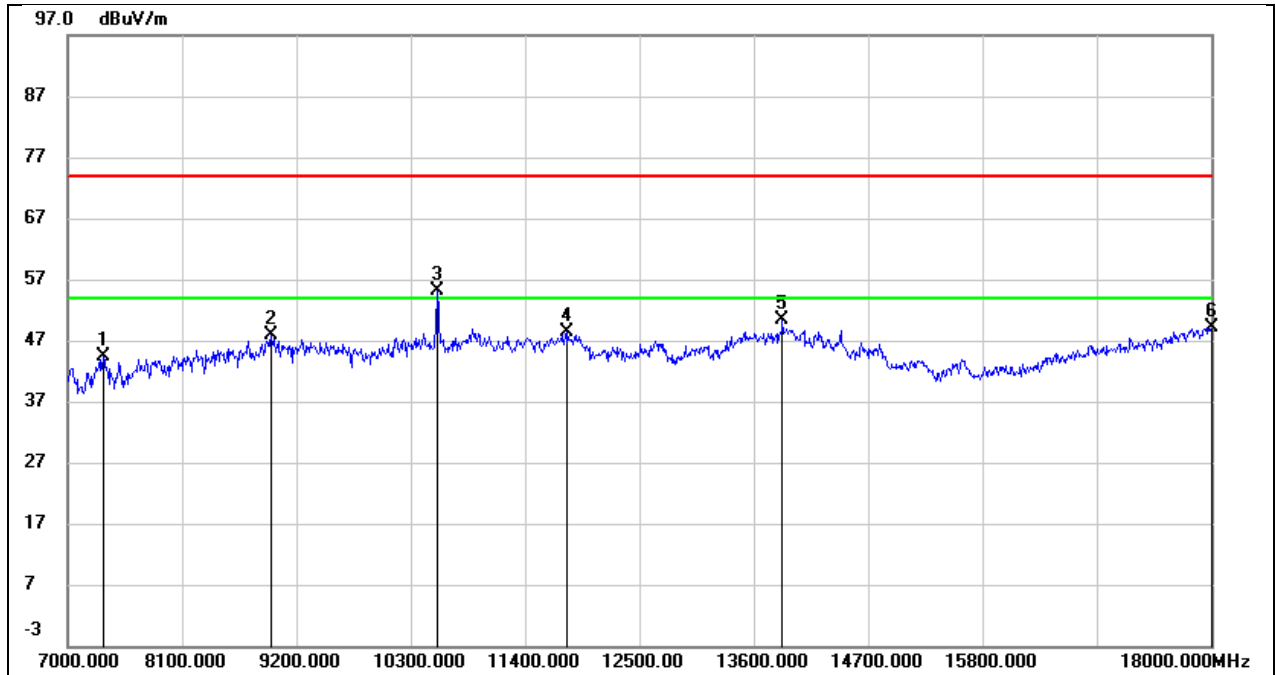


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.32	8.00	44.32	74.00	-29.68	peak
2	8958.000	36.73	11.24	47.97	74.00	-26.03	peak
3*	10553.000	41.53	13.64	55.17	68.20	-13.03	peak
4	11807.000	30.71	17.60	48.31	74.00	-25.69	peak
5	13875.000	27.89	22.46	50.35	74.00	-23.65	peak
6	18000.000	22.06	26.97	49.03	74.00	-24.97	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5 V

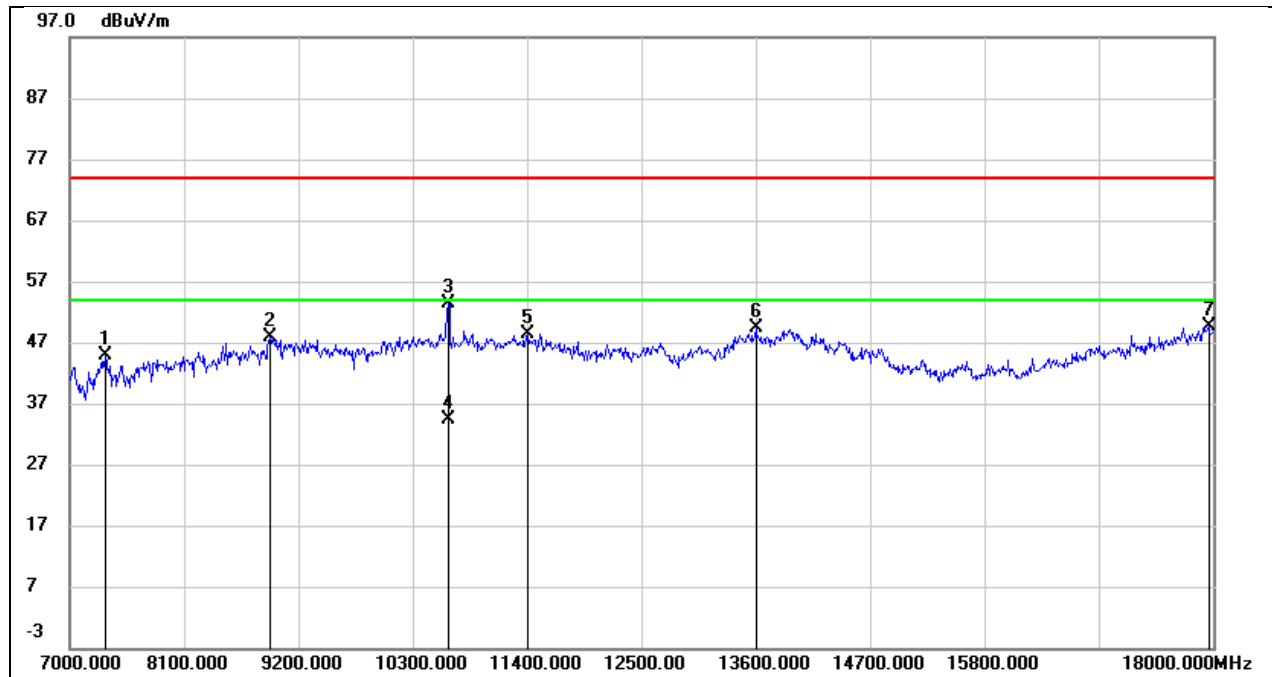


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.93	8.00	44.93	74.00	-29.07	peak
2	8925.000	37.14	10.75	47.89	74.00	-26.11	peak
3	10641.000	39.70	13.79	53.49	74.00	-20.51	peak
4	10641.000	20.71	13.79	34.50	54.00	-19.50	AVG
5	11411.000	31.82	16.60	48.42	74.00	-25.58	peak
6	13600.000	27.92	21.42	49.34	74.00	-24.66	peak
7	17956.000	22.85	26.78	49.63	74.00	-24.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

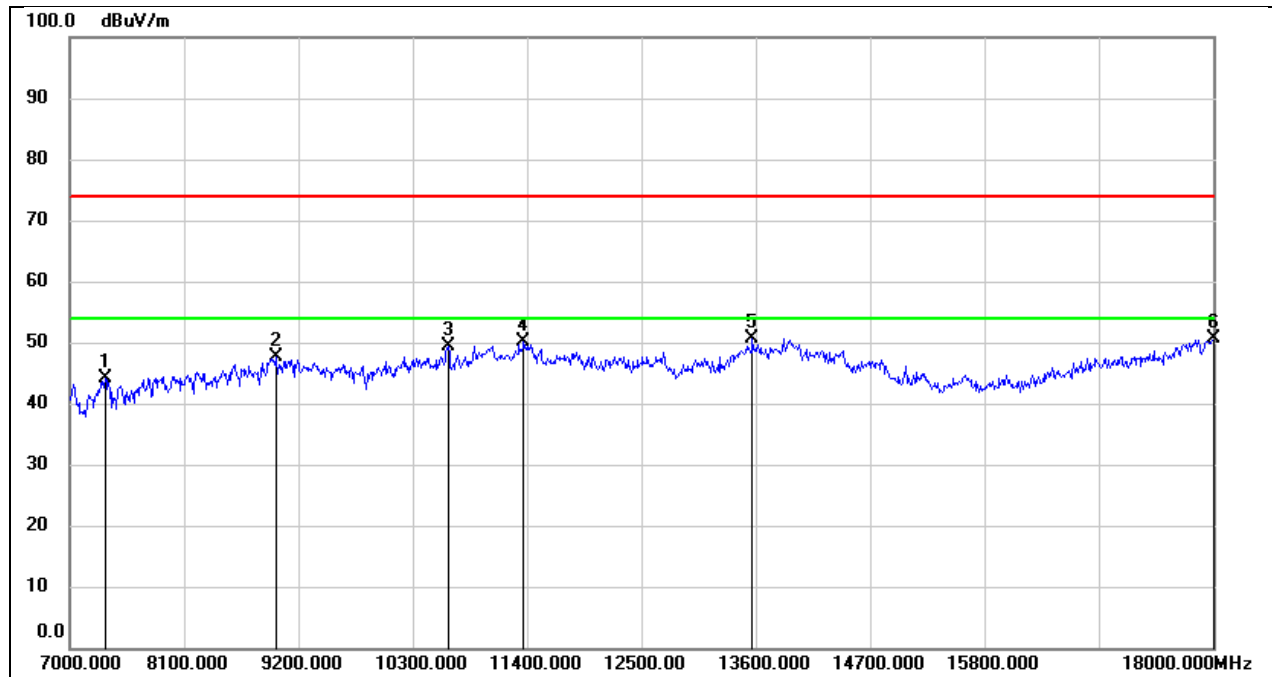


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.06	8.00	44.06	74.00	-29.94	peak
2	8980.000	36.10	11.57	47.67	74.00	-26.33	peak
3	10641.000	35.63	13.79	49.42	74.00	-24.58	peak
4	11367.000	33.81	16.37	50.18	74.00	-23.82	peak
5	13567.000	29.32	21.41	50.73	74.00	-23.27	peak
6	18000.000	23.75	26.97	50.72	74.00	-23.28	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

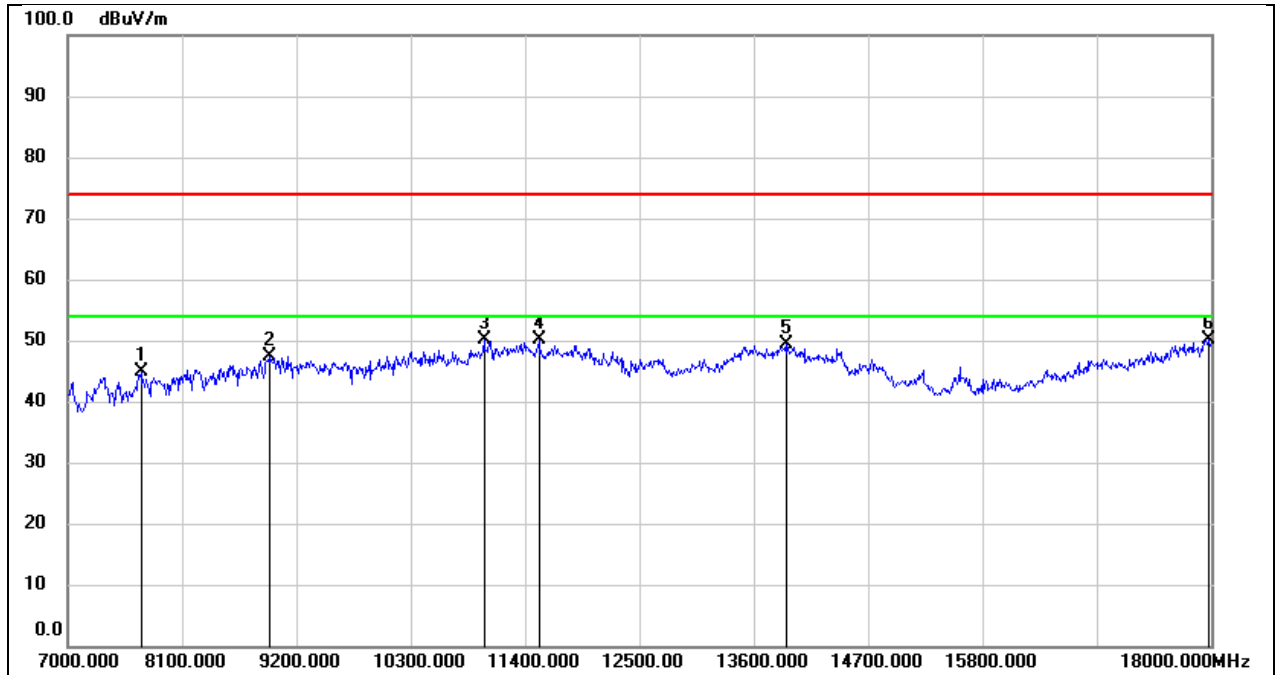


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7704.000	38.18	6.74	44.92	74.00	-29.08	peak
2	8936.000	36.41	10.91	47.32	74.00	-26.68	peak
3	11004.000	35.17	14.90	50.07	74.00	-23.93	peak
4	11532.000	33.14	16.93	50.07	74.00	-23.93	peak
5	13919.000	26.87	22.49	49.36	74.00	-24.64	peak
6	17978.000	23.36	26.88	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

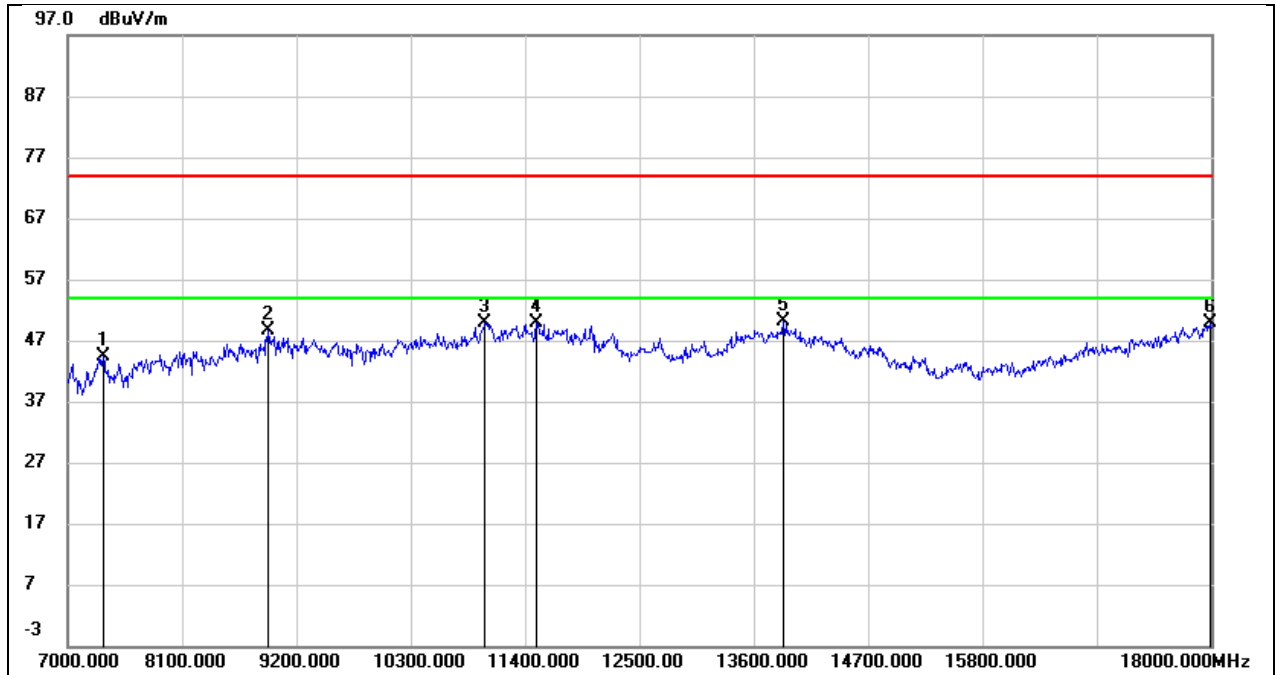


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.36	8.00	44.36	74.00	-29.64	peak
2	8925.000	37.81	10.75	48.56	74.00	-25.44	peak
3	11015.000	34.93	14.93	49.86	74.00	-24.14	peak
4	11510.000	32.97	16.90	49.87	74.00	-24.13	peak
5	13886.000	27.54	22.48	50.02	74.00	-23.98	peak
6	17989.000	22.92	26.92	49.84	74.00	-24.16	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

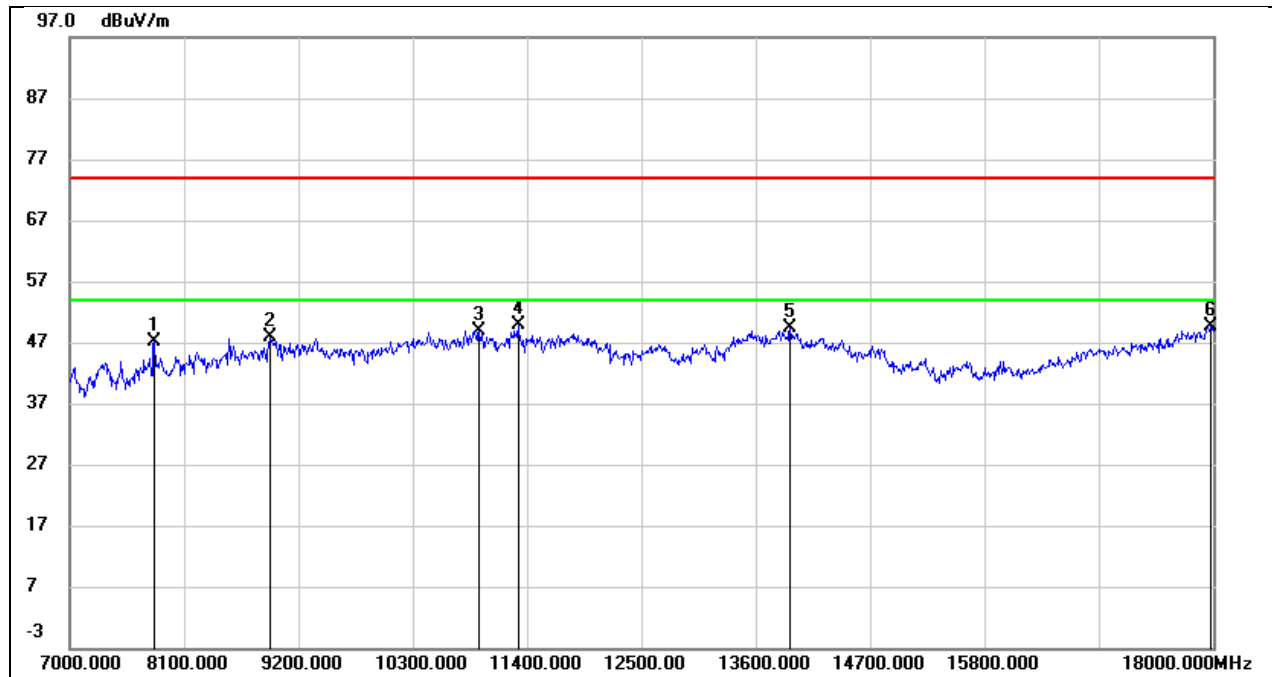


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7814.000	40.31	6.85	47.16	74.00	-26.84	peak
2	8925.000	37.24	10.75	47.99	74.00	-26.01	peak
3	10938.000	34.23	14.57	48.80	74.00	-25.20	peak
4	11312.000	33.78	16.03	49.81	74.00	-24.19	peak
5	13930.000	26.97	22.50	49.47	74.00	-24.53	peak
6	17978.000	22.81	26.88	49.69	74.00	-24.31	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

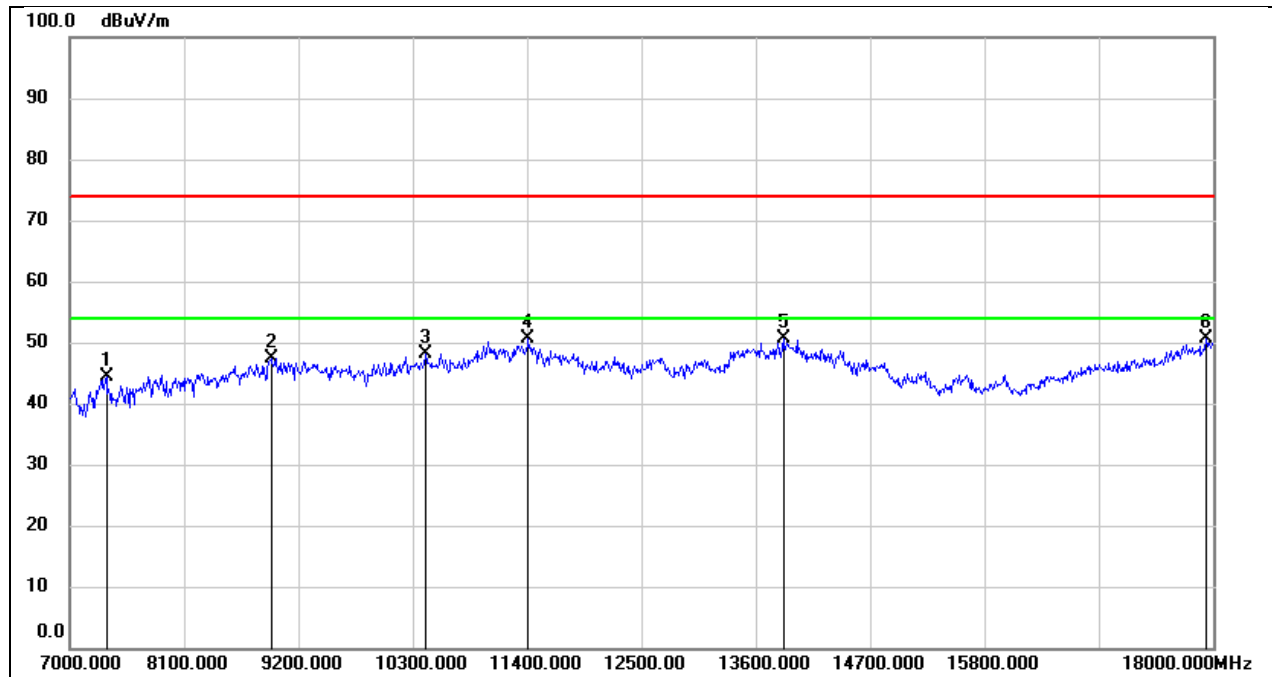


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.22	8.07	44.29	74.00	-29.71	peak
2	8936.000	36.58	10.91	47.49	74.00	-26.51	peak
3	10421.000	34.78	13.29	48.07	74.00	-25.93	peak
4	11411.000	33.91	16.60	50.51	74.00	-23.49	peak
5	13864.000	28.28	22.45	50.73	74.00	-23.27	peak
6	17934.000	23.91	26.69	50.60	74.00	-23.40	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

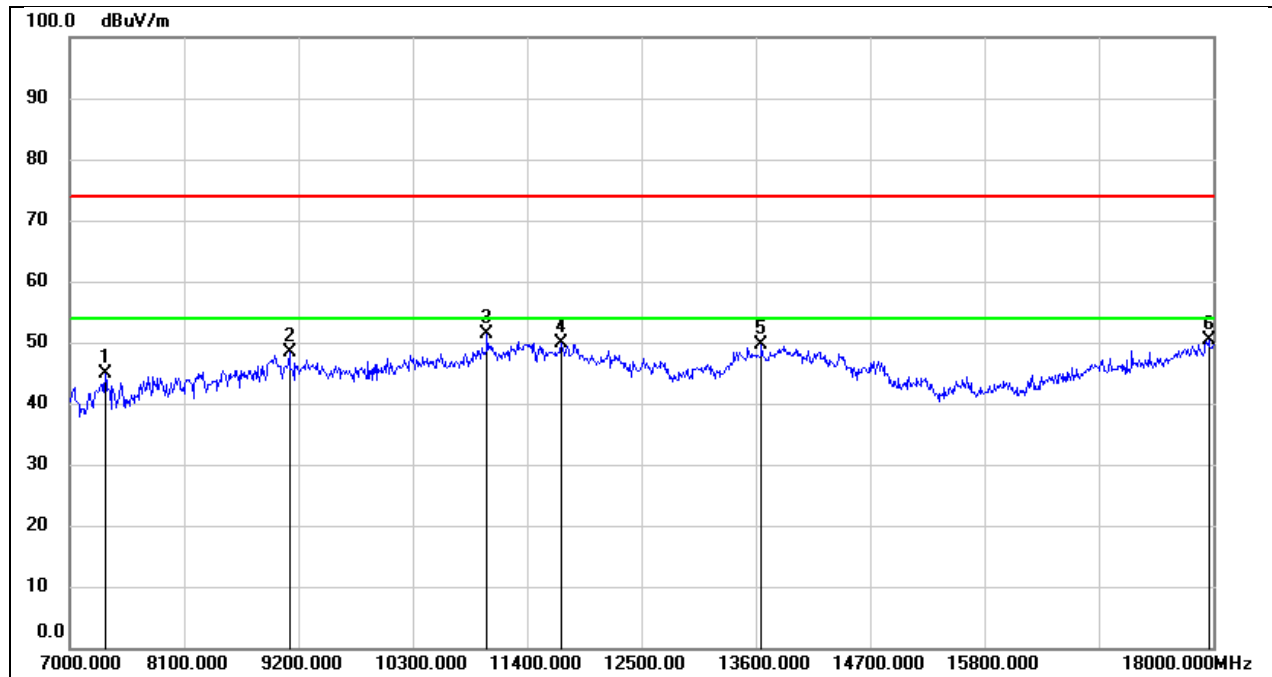


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.96	8.00	44.96	74.00	-29.04	peak
2	9112.000	37.43	10.85	48.28	74.00	-25.72	peak
3	11015.000	36.41	14.93	51.34	74.00	-22.66	peak
4	11730.000	32.48	17.37	49.85	74.00	-24.15	peak
5	13655.000	27.96	21.69	49.65	74.00	-24.35	peak
6	17956.000	23.48	26.78	50.26	74.00	-23.74	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

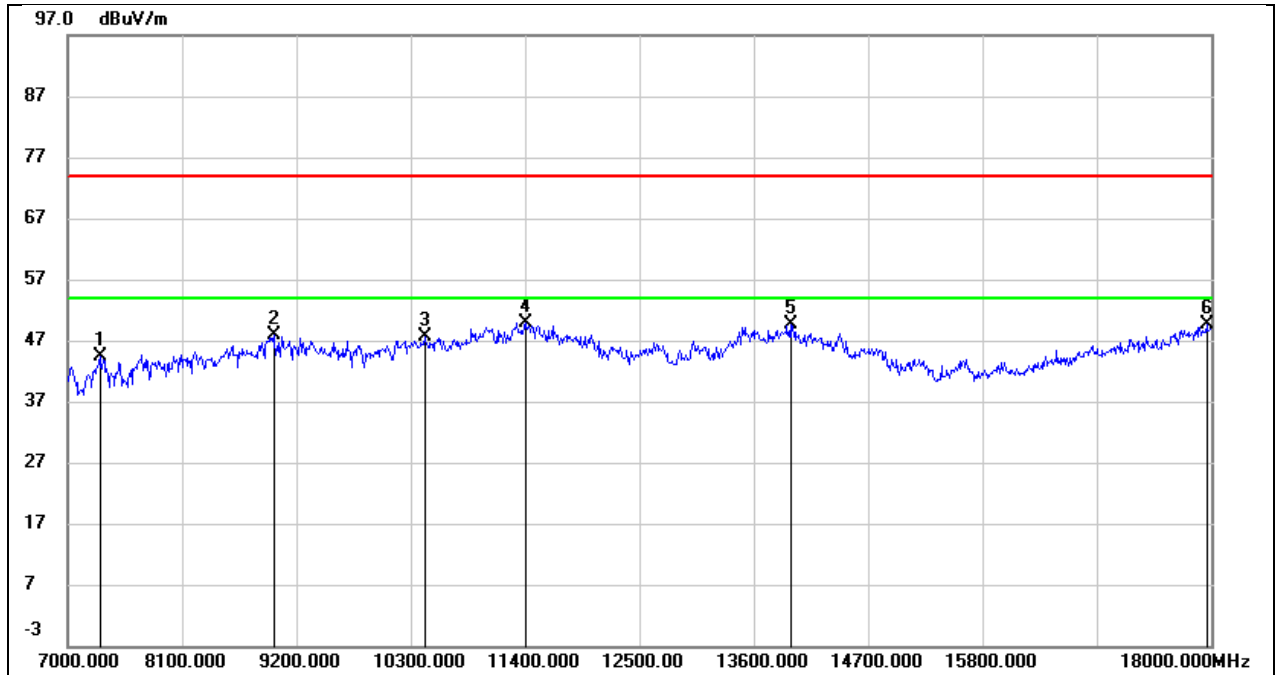


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.53	7.73	44.26	74.00	-29.74	peak
2	8980.000	36.20	11.57	47.77	74.00	-26.23	peak
3	10432.000	34.32	13.31	47.63	74.00	-26.37	peak
4	11400.000	33.28	16.57	49.85	74.00	-24.15	peak
5	13952.000	27.22	22.51	49.73	74.00	-24.27	peak
6	17956.000	22.84	26.78	49.62	74.00	-24.38	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

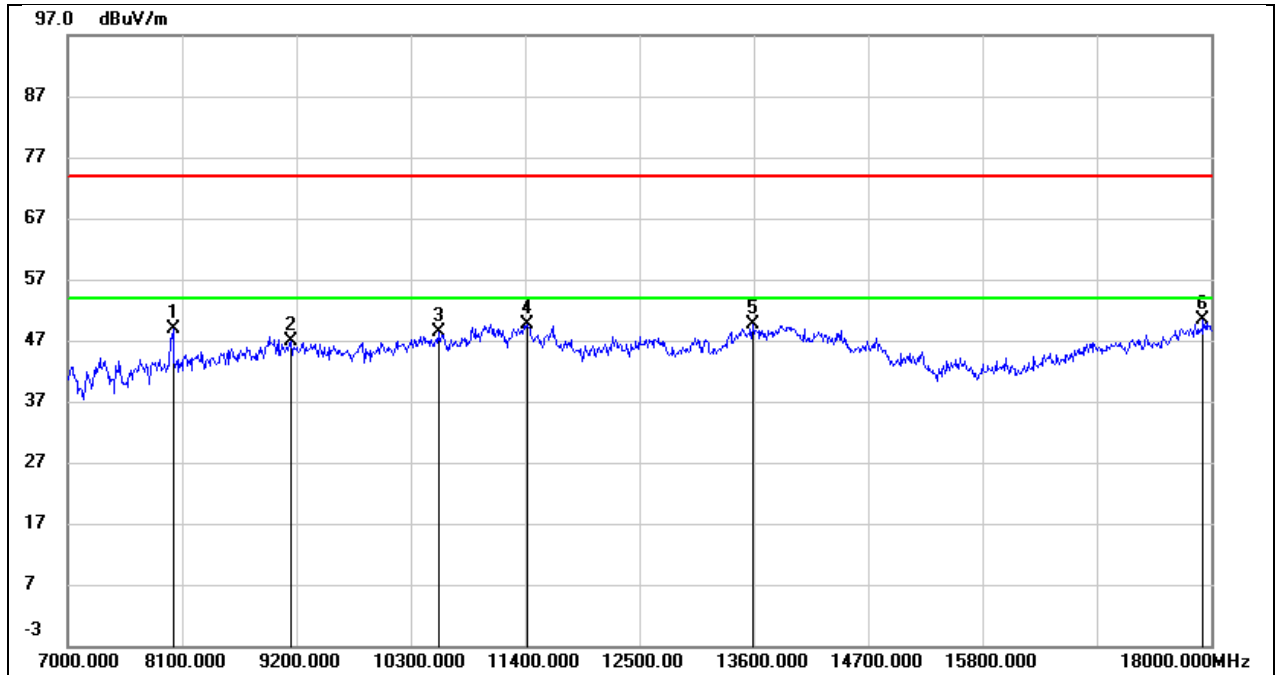


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8012.000	41.86	6.99	48.85	74.00	-25.15	peak
2	9145.000	36.27	10.54	46.81	74.00	-27.19	peak
3	10564.000	34.70	13.68	48.38	74.00	-25.62	peak
4	11422.000	33.01	16.64	49.65	74.00	-24.35	peak
5	13589.000	28.16	21.41	49.57	74.00	-24.43	peak
6	17923.000	23.66	26.64	50.30	74.00	-23.70	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

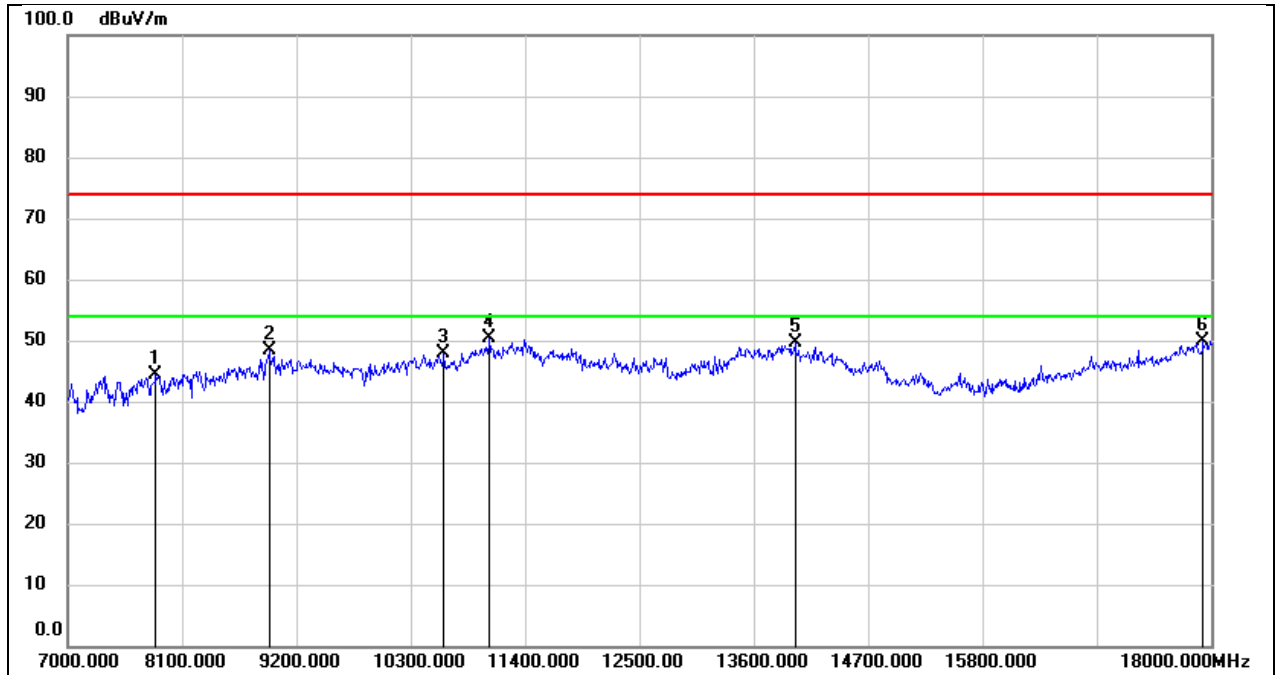


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7847.000	37.58	6.86	44.44	74.00	-29.56	peak
2	8936.000	37.47	10.91	48.38	74.00	-25.62	peak
3	10619.000	34.09	13.78	47.87	74.00	-26.13	peak
4	11059.000	35.28	15.02	50.30	74.00	-23.70	peak
5	13996.000	27.03	22.54	49.57	74.00	-24.43	peak
6	17923.000	23.36	26.64	50.00	74.00	-24.00	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

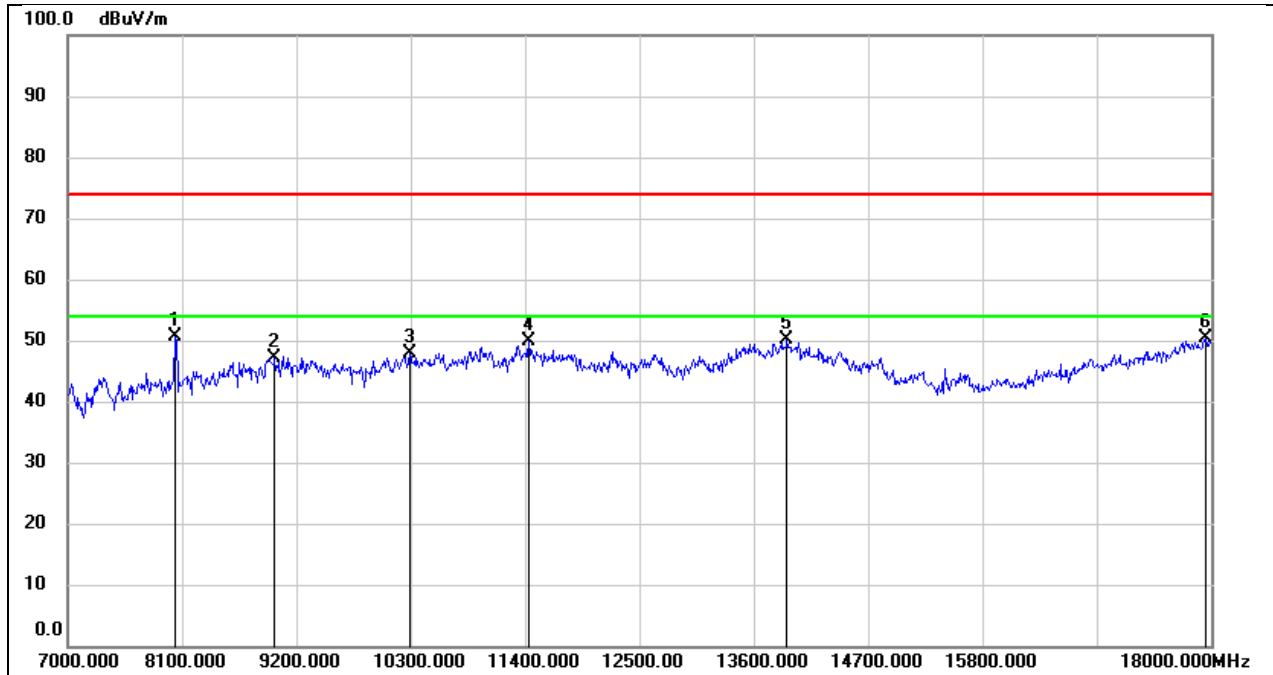


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8034.000	43.38	7.17	50.55	74.00	-23.45	peak
2	8991.000	35.33	11.73	47.06	74.00	-26.94	peak
3	10289.000	35.22	12.74	47.96	74.00	-26.04	peak
4	11433.000	33.10	16.68	49.78	74.00	-24.22	peak
5	13919.000	27.62	22.49	50.11	74.00	-23.89	peak
6	17945.000	23.52	26.74	50.26	74.00	-23.74	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

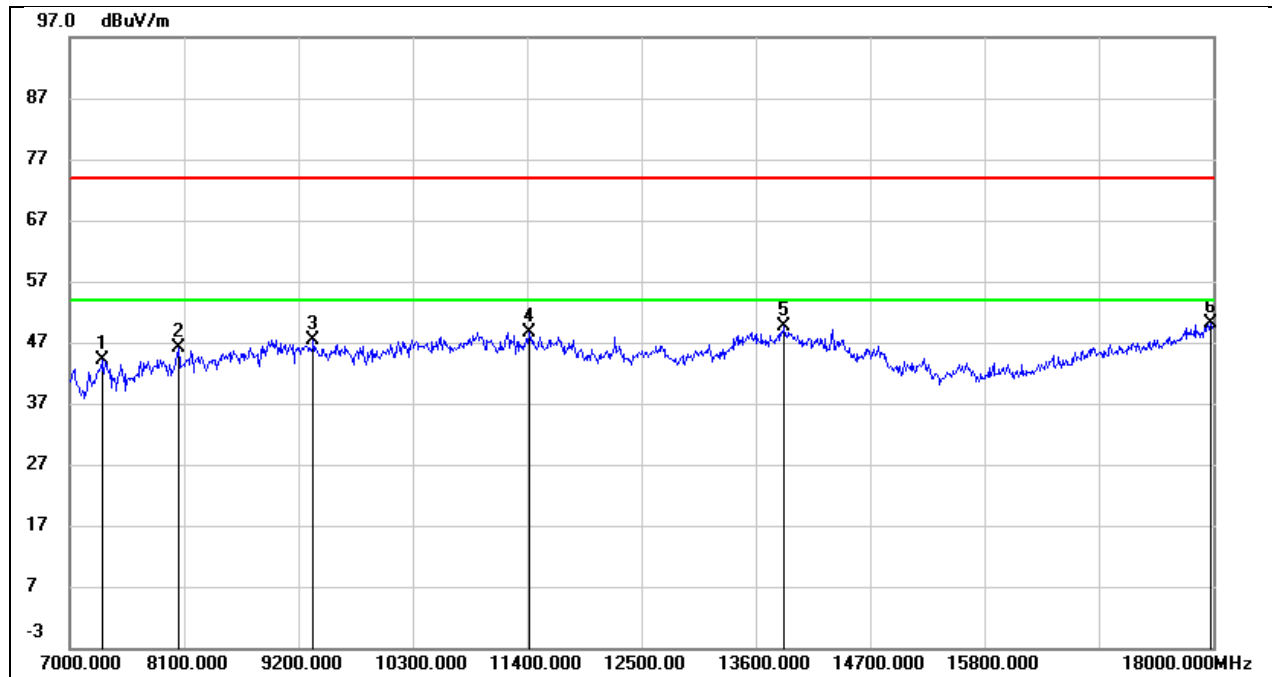


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.32	7.73	44.05	74.00	-29.95	peak
2	8045.000	38.82	7.27	46.09	74.00	-27.91	peak
3	9343.000	36.93	10.49	47.42	74.00	-26.58	peak
4	11422.000	32.06	16.64	48.70	74.00	-25.30	peak
5	13875.000	27.07	22.46	49.53	74.00	-24.47	peak
6	17978.000	23.28	26.88	50.16	74.00	-23.84	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

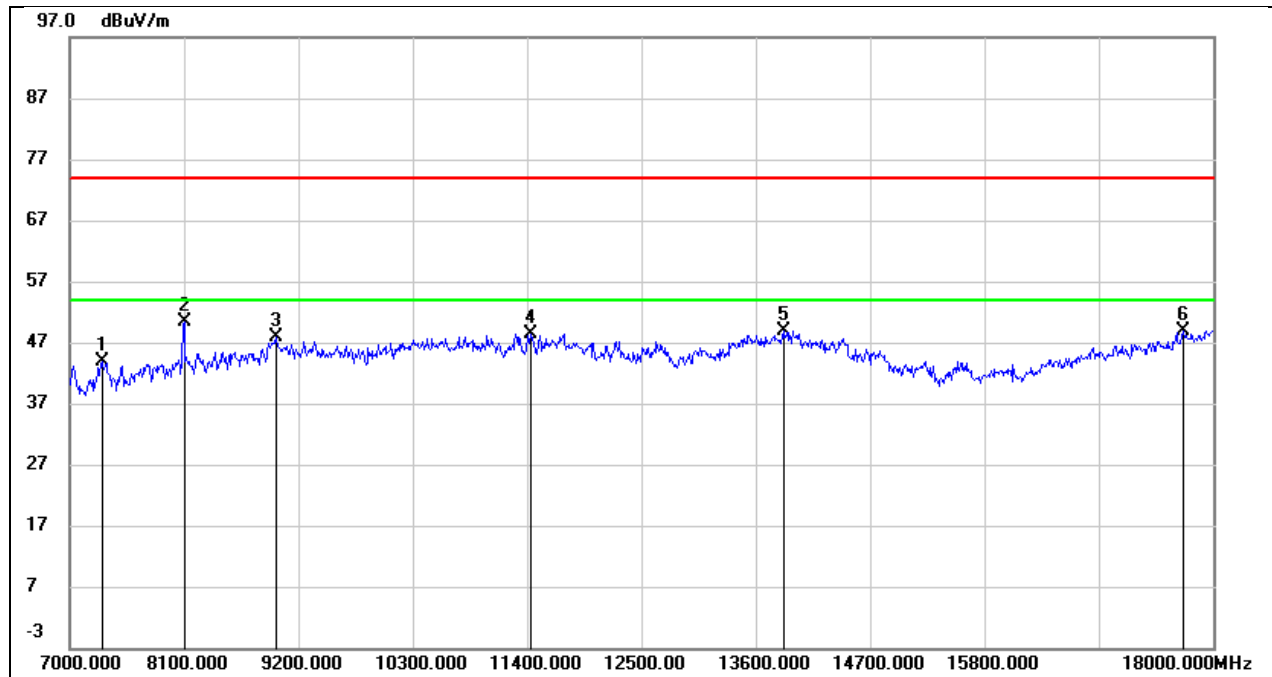


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.04	7.73	43.77	74.00	-30.23	peak
2	8100.000	42.54	7.74	50.28	74.00	-23.72	peak
3	8980.000	36.31	11.57	47.88	74.00	-26.12	peak
4	11433.000	31.80	16.68	48.48	74.00	-25.52	peak
5	13864.000	26.50	22.45	48.95	74.00	-25.05	peak
6	17714.000	23.79	25.14	48.93	74.00	-25.07	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

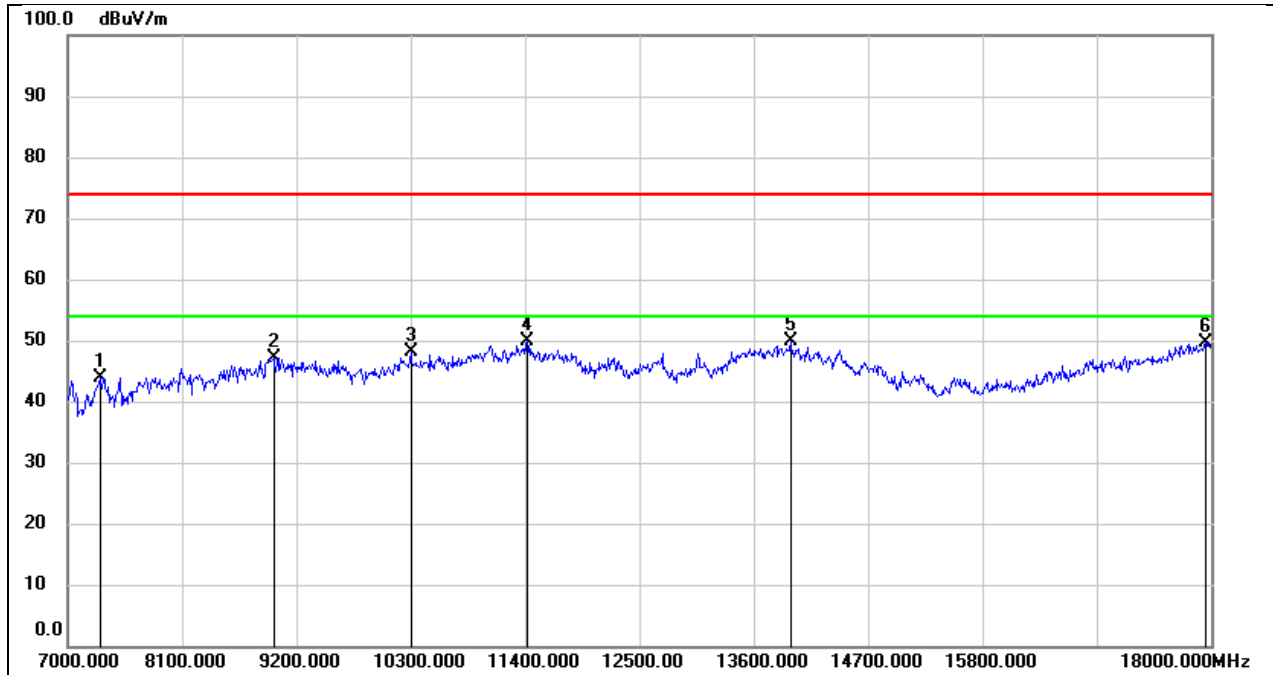


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.12	7.73	43.85	74.00	-30.15	peak
2	8980.000	35.66	11.57	47.23	74.00	-26.77	peak
3	10300.000	35.42	12.78	48.20	74.00	-25.80	peak
4	11422.000	33.14	16.64	49.78	74.00	-24.22	peak
5	13952.000	27.49	22.51	50.00	74.00	-24.00	peak
6	17945.000	22.86	26.74	49.60	74.00	-24.40	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

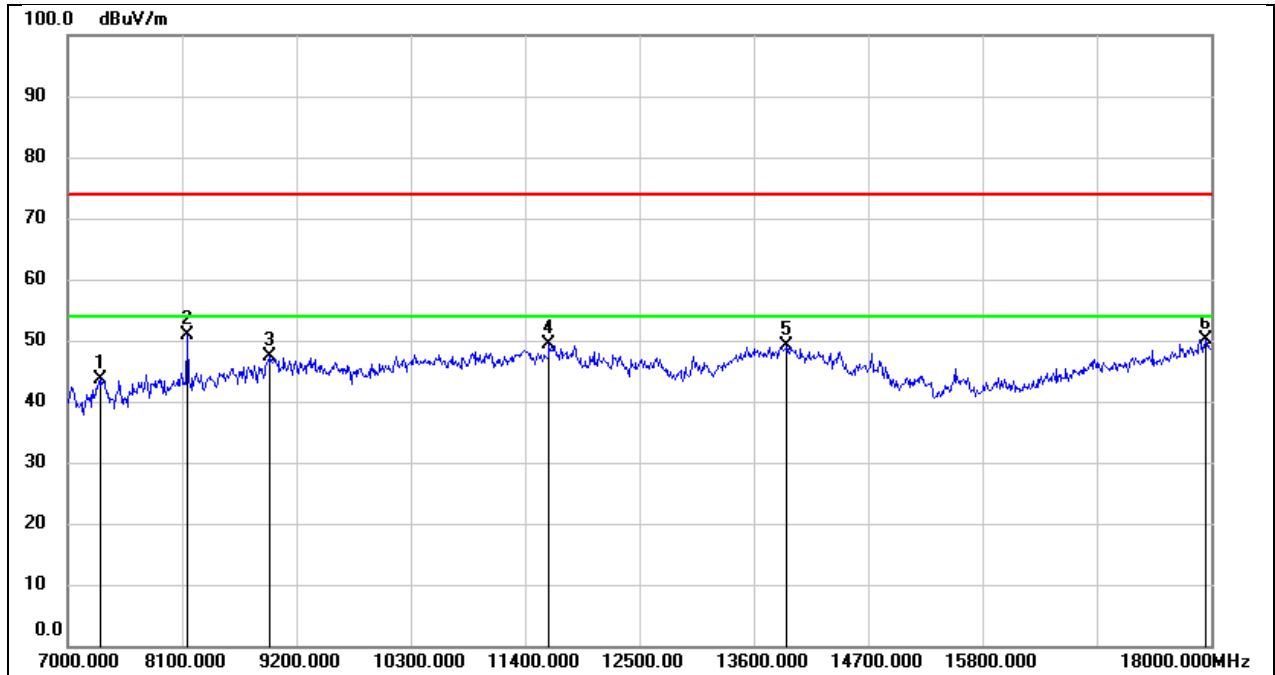


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.86	7.73	43.59	74.00	-30.41	peak
2	8155.000	42.67	8.23	50.90	74.00	-23.10	peak
3	8947.000	36.20	11.08	47.28	74.00	-26.72	peak
4	11631.000	32.32	17.10	49.42	74.00	-24.58	peak
5	13919.000	26.74	22.49	49.23	74.00	-24.77	peak
6	17945.000	23.46	26.74	50.20	74.00	-23.80	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

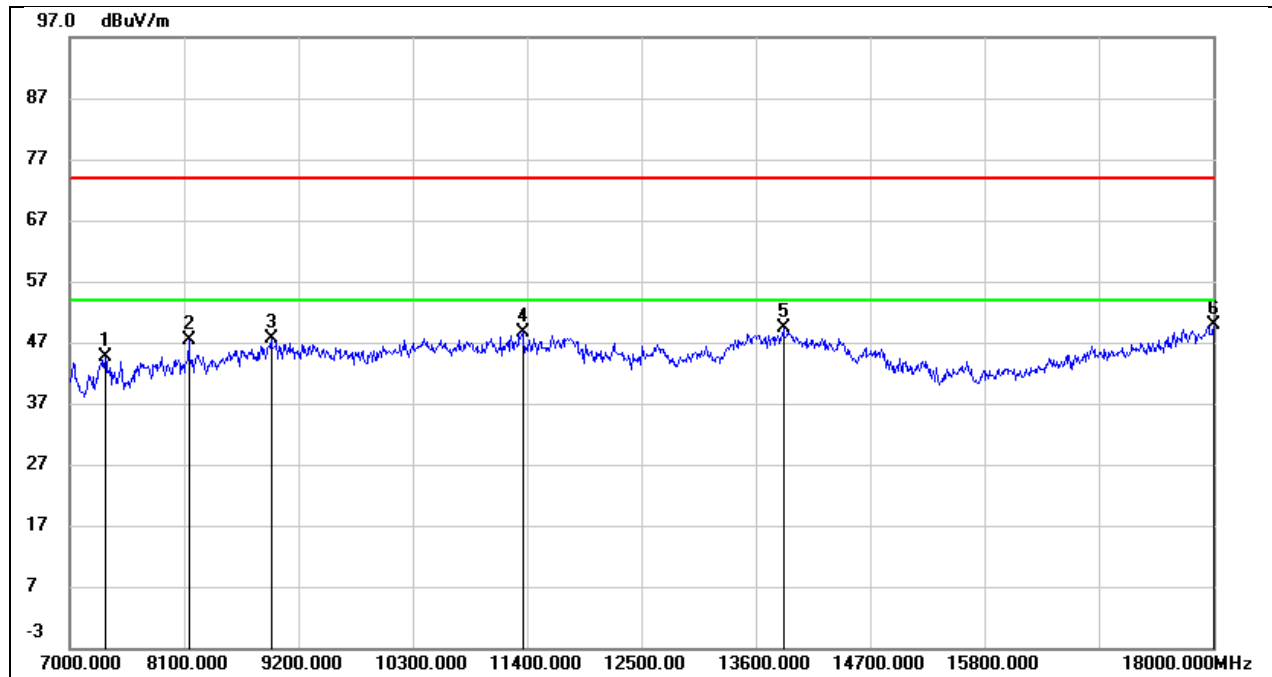


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.57	8.00	44.57	74.00	-29.43	peak
2	8144.000	39.28	8.12	47.40	74.00	-26.60	peak
3	8936.000	36.62	10.91	47.53	74.00	-26.47	peak
4	11356.000	32.45	16.30	48.75	74.00	-25.25	peak
5	13864.000	26.81	22.45	49.26	74.00	-24.74	peak
6	18000.000	22.99	26.97	49.96	74.00	-24.04	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

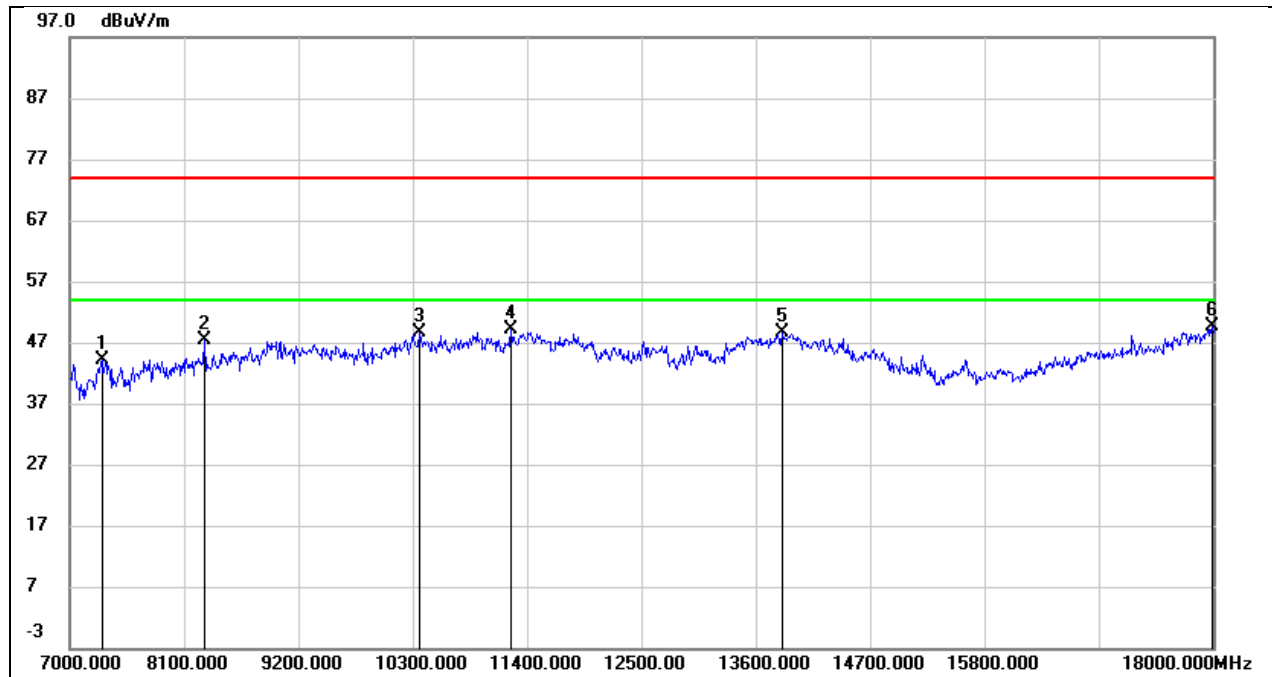


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.49	7.73	44.22	74.00	-29.78	peak
2	8298.000	39.15	8.23	47.38	74.00	-26.62	peak
3	10366.000	35.49	13.08	48.57	74.00	-25.43	peak
4	11246.000	33.61	15.62	49.23	74.00	-24.77	peak
5	13853.000	26.08	22.46	48.54	74.00	-25.46	peak
6	17989.000	22.71	26.92	49.63	74.00	-24.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

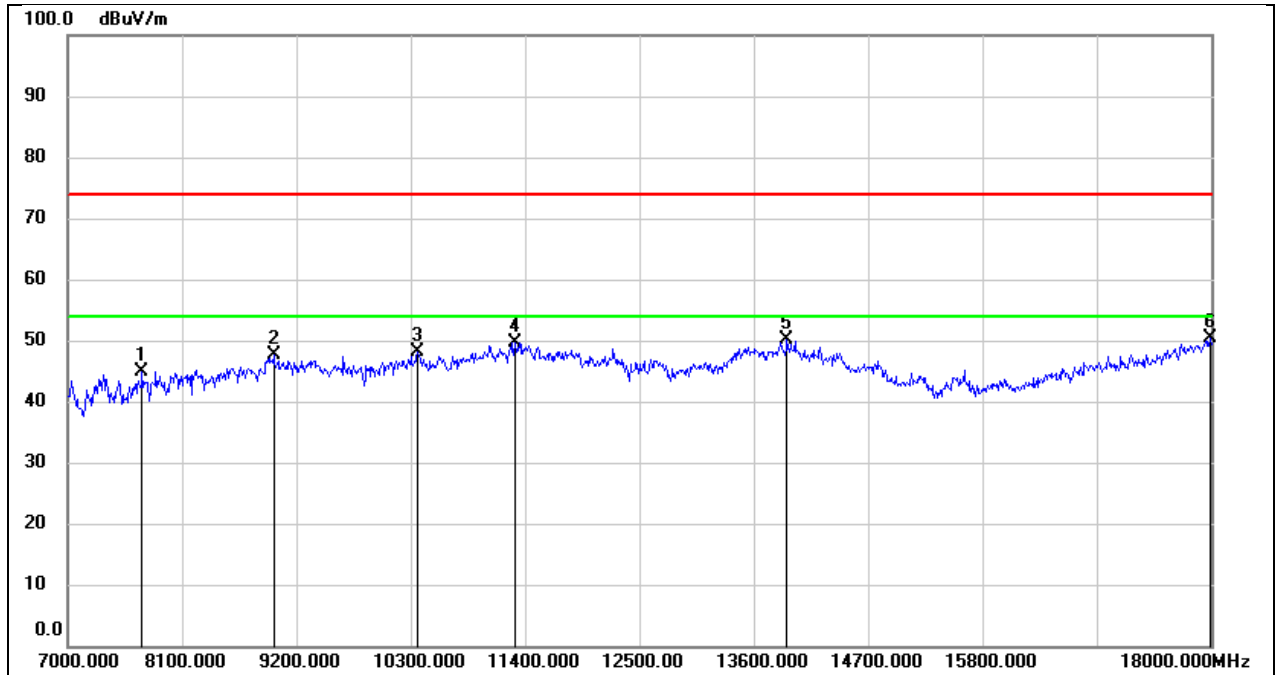


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	38.05	6.75	44.80	74.00	-29.20	peak
2	8980.000	35.98	11.57	47.55	74.00	-26.45	peak
3	10366.000	35.06	13.08	48.14	74.00	-25.86	peak
4	11301.000	33.72	15.96	49.68	74.00	-24.32	peak
5	13919.000	27.54	22.49	50.03	74.00	-23.97	peak
6	17989.000	23.40	26.92	50.32	74.00	-23.68	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

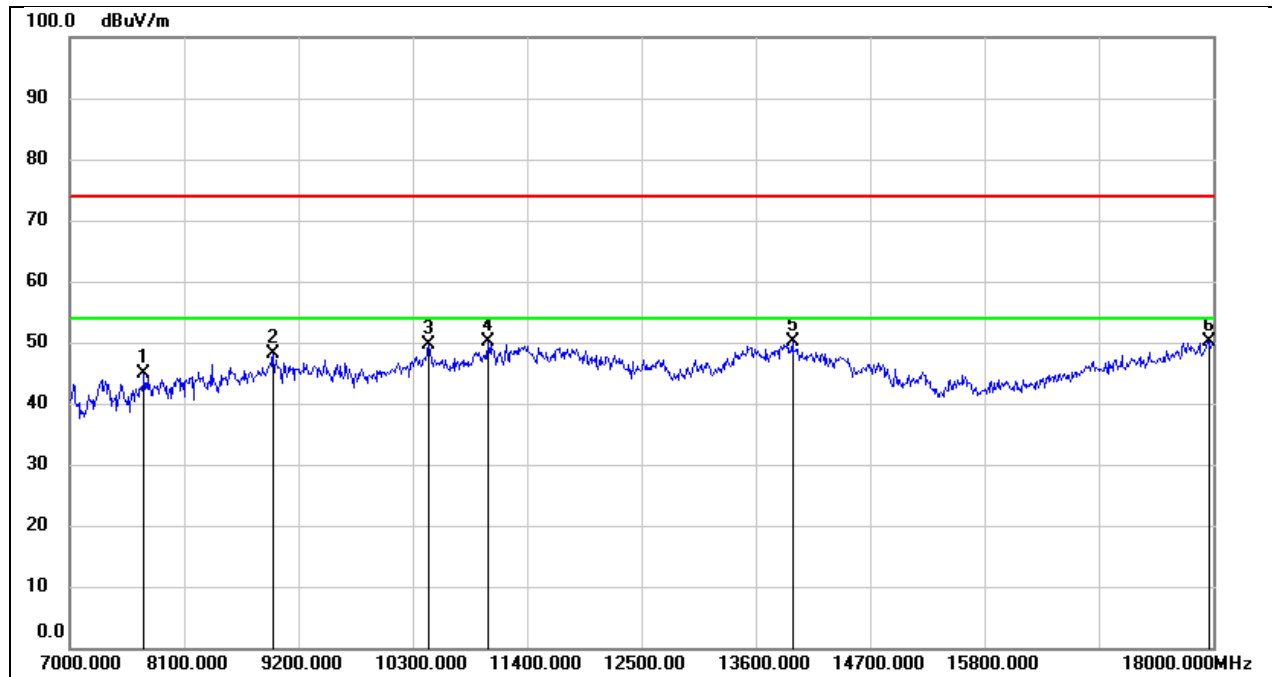


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	38.13	6.75	44.88	74.00	-29.12	peak
2	8958.000	36.93	11.24	48.17	74.00	-25.83	peak
3	10454.000	36.29	13.38	49.67	74.00	-24.33	peak
4	11026.000	35.24	14.95	50.19	74.00	-23.81	peak
5	13952.000	27.68	22.51	50.19	74.00	-23.81	peak
6	17967.000	23.24	26.83	50.07	74.00	-23.93	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

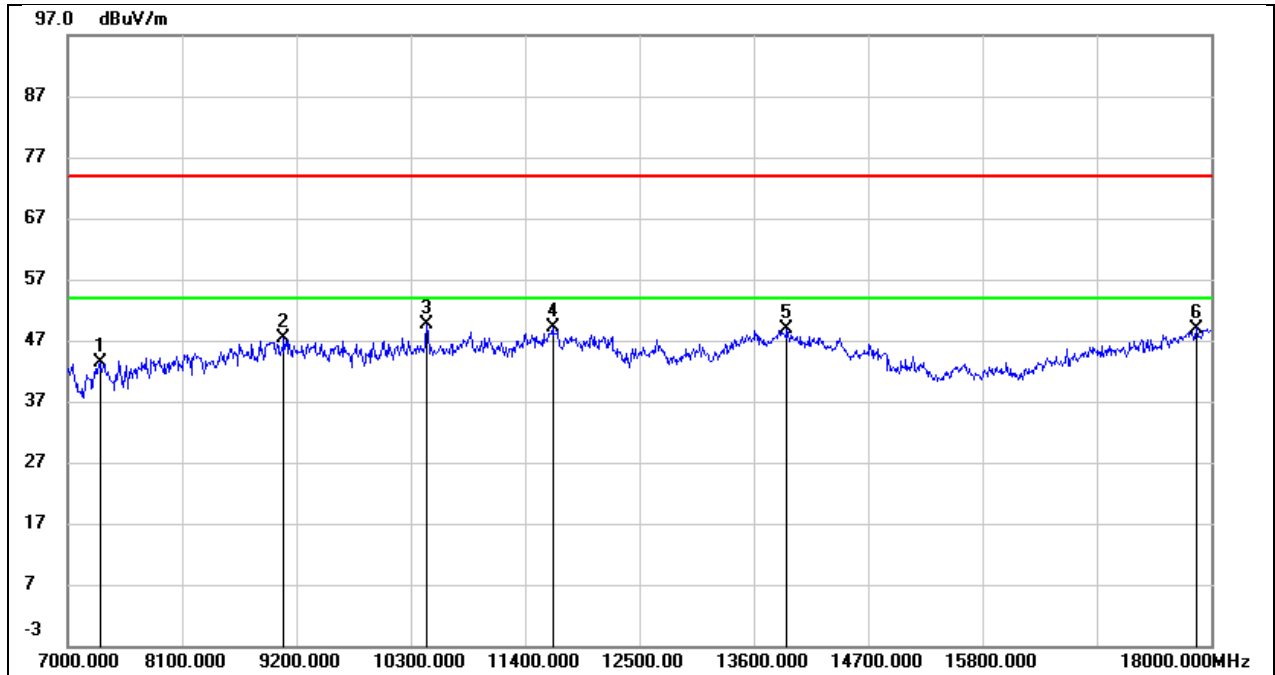


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.73	7.73	43.46	74.00	-30.54	peak
2	9079.000	36.26	11.15	47.41	74.00	-26.59	peak
3	10454.000	36.22	13.38	49.60	74.00	-24.40	peak
4	11664.000	31.88	17.19	49.07	74.00	-24.93	peak
5	13919.000	26.33	22.49	48.82	74.00	-25.18	peak
6	17857.000	22.64	26.36	49.00	74.00	-25.00	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

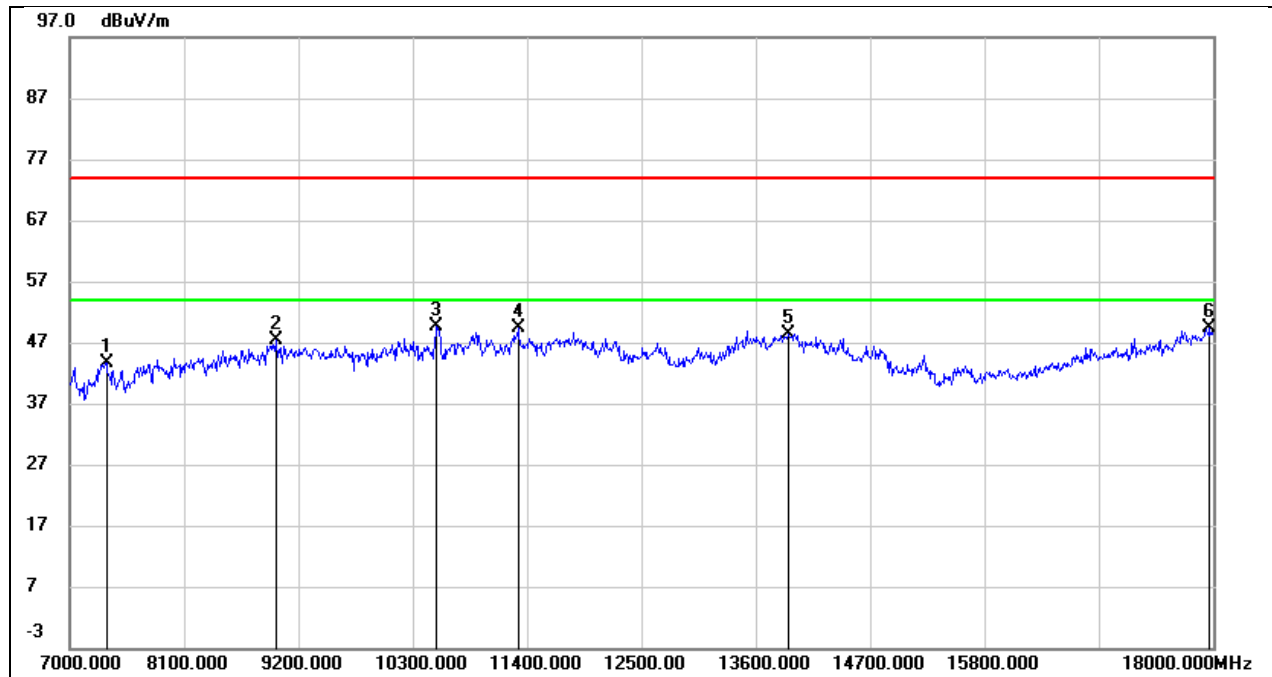


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.61	8.07	43.68	74.00	-30.32	peak
2	8980.000	35.77	11.57	47.34	74.00	-26.66	peak
3	10531.000	35.98	13.58	49.56	74.00	-24.44	peak
4	11312.000	33.24	16.03	49.27	74.00	-24.73	peak
5	13919.000	25.84	22.49	48.33	74.00	-25.67	peak
6	17967.000	22.53	26.83	49.36	74.00	-24.64	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

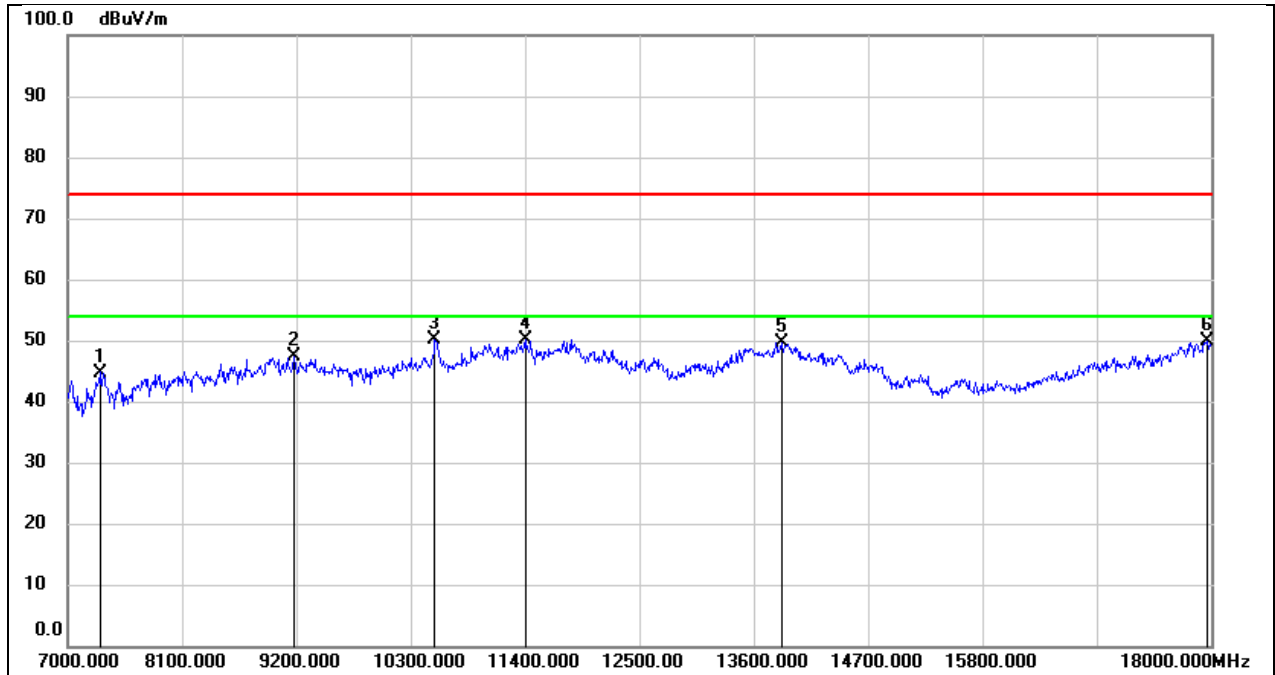


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.02	7.73	44.75	74.00	-29.25	peak
2	9178.000	37.19	10.24	47.43	74.00	-26.57	peak
3	10531.000	36.50	13.58	50.08	74.00	-23.92	peak
4	11400.000	33.68	16.57	50.25	74.00	-23.75	peak
5	13875.000	27.27	22.46	49.73	74.00	-24.27	peak
6	17967.000	23.09	26.83	49.92	74.00	-24.08	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

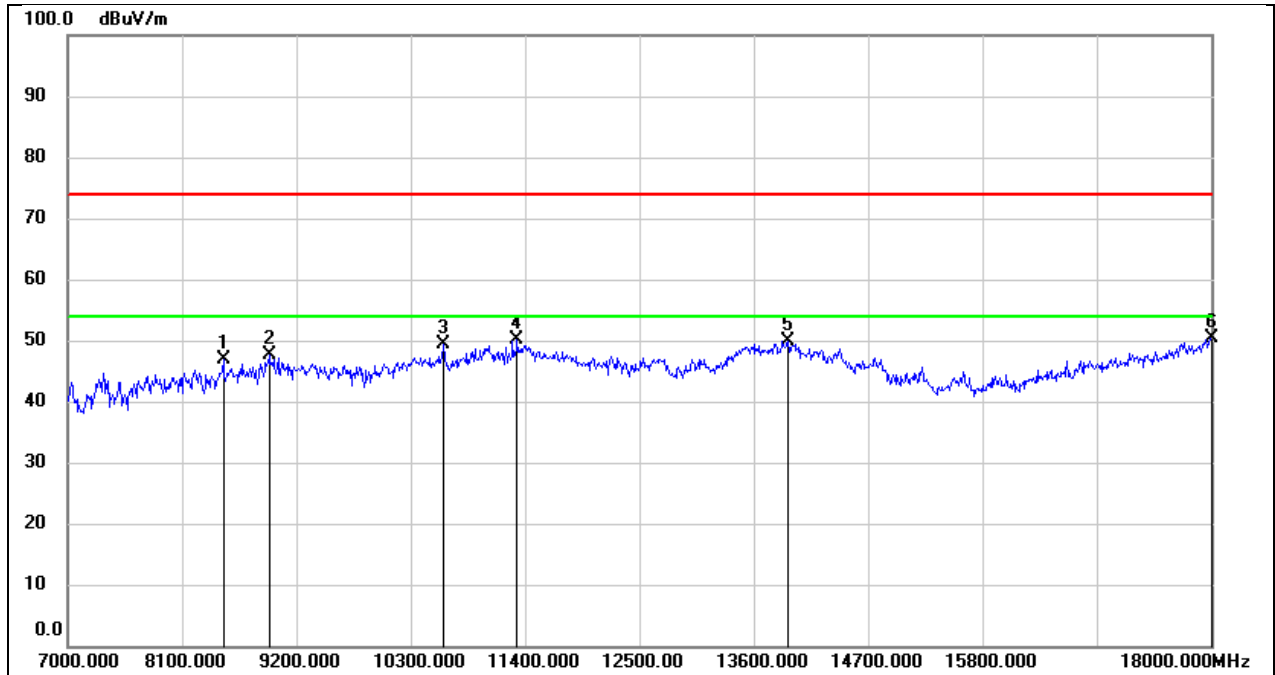


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8496.000	38.44	8.37	46.81	74.00	-27.19	peak
2	8936.000	36.75	10.91	47.66	74.00	-26.34	peak
3	10619.000	35.52	13.78	49.30	74.00	-24.70	peak
4	11323.000	34.13	16.10	50.23	74.00	-23.77	peak
5	13930.000	27.50	22.50	50.00	74.00	-24.00	peak
6	18000.000	23.40	26.97	50.37	74.00	-23.63	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

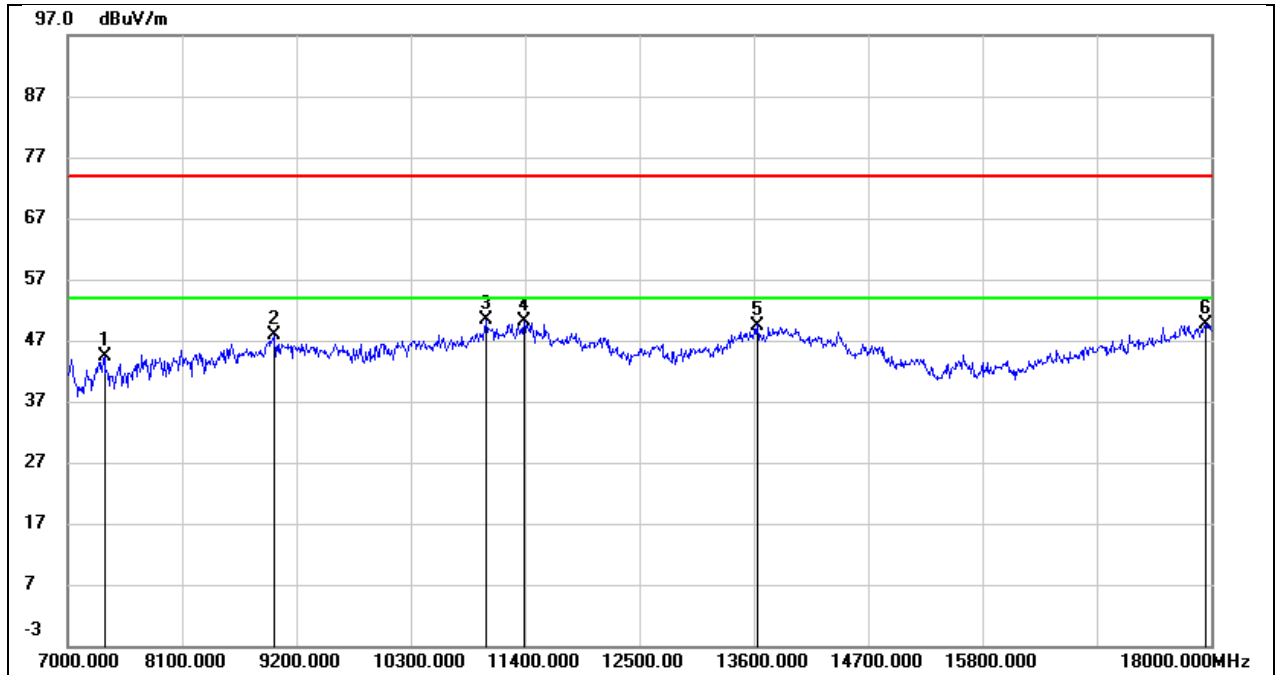


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.30	8.07	44.37	74.00	-29.63	peak
2	8991.000	36.05	11.73	47.78	74.00	-26.22	peak
3	11026.000	35.38	14.95	50.33	74.00	-23.67	peak
4	11389.000	33.66	16.51	50.17	74.00	-23.83	peak
5	13633.000	27.91	21.59	49.50	74.00	-24.50	peak
6	17945.000	22.82	26.74	49.56	74.00	-24.44	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

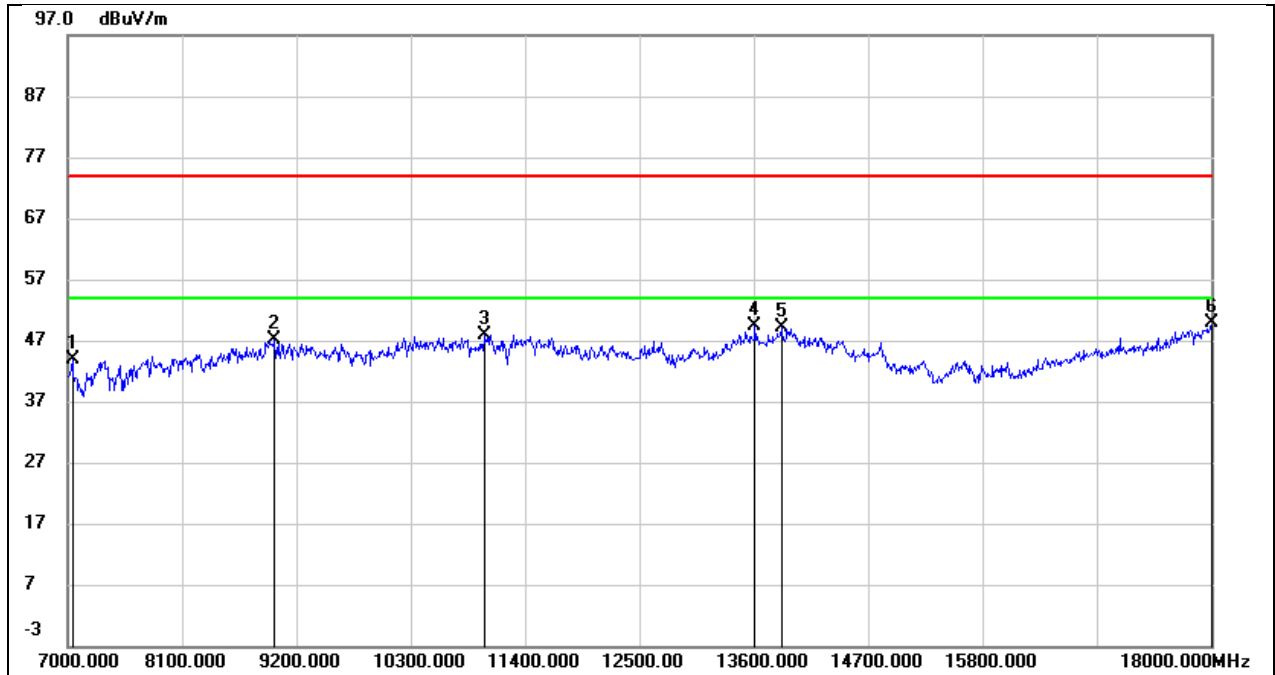


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7044.000	36.39	7.53	43.92	74.00	-30.08	peak
2	8991.000	35.29	11.73	47.02	74.00	-26.98	peak
3	11015.000	33.03	14.93	47.96	74.00	-26.04	peak
4	13611.000	27.92	21.48	49.40	74.00	-24.60	peak
5	13864.000	26.70	22.45	49.15	74.00	-24.85	peak
6	18000.000	22.79	26.97	49.76	74.00	-24.24	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

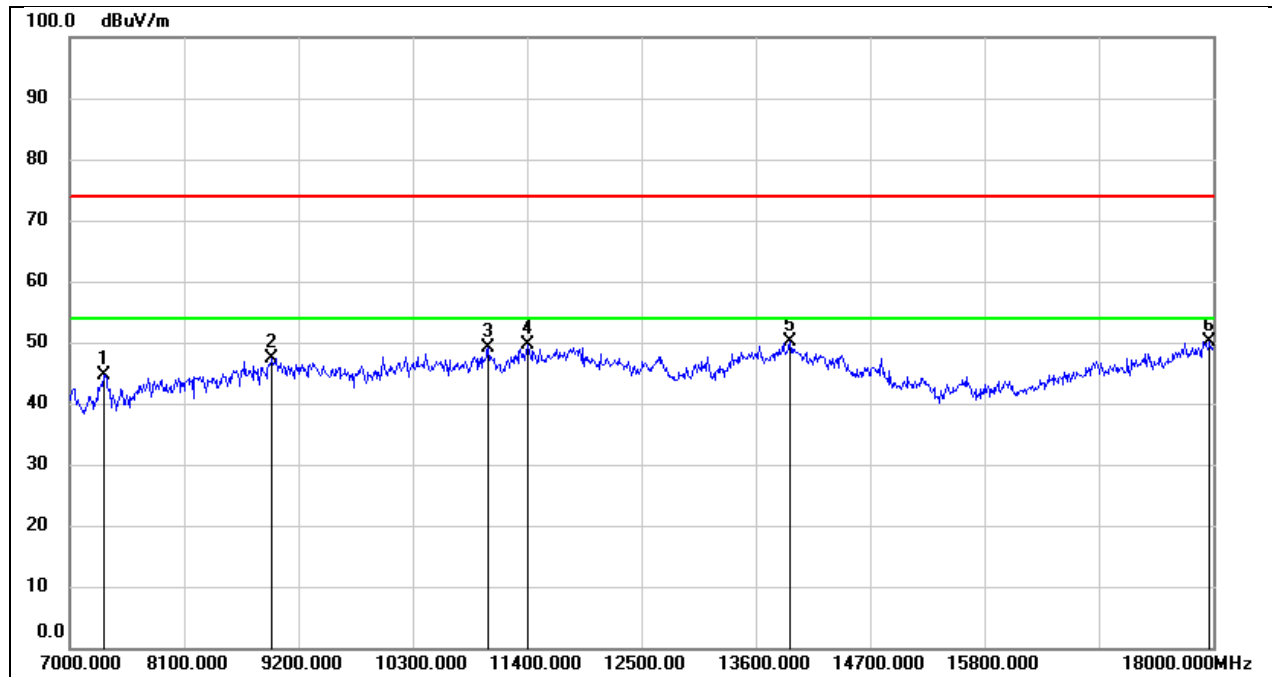


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	36.82	7.91	44.73	74.00	-29.27	peak
2	8947.000	36.34	11.08	47.42	74.00	-26.58	peak
3	11026.000	34.14	14.95	49.09	74.00	-24.91	peak
4	11411.000	33.02	16.60	49.62	74.00	-24.38	peak
5	13930.000	27.72	22.50	50.22	74.00	-23.78	peak
6	17967.000	23.23	26.83	50.06	74.00	-23.94	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

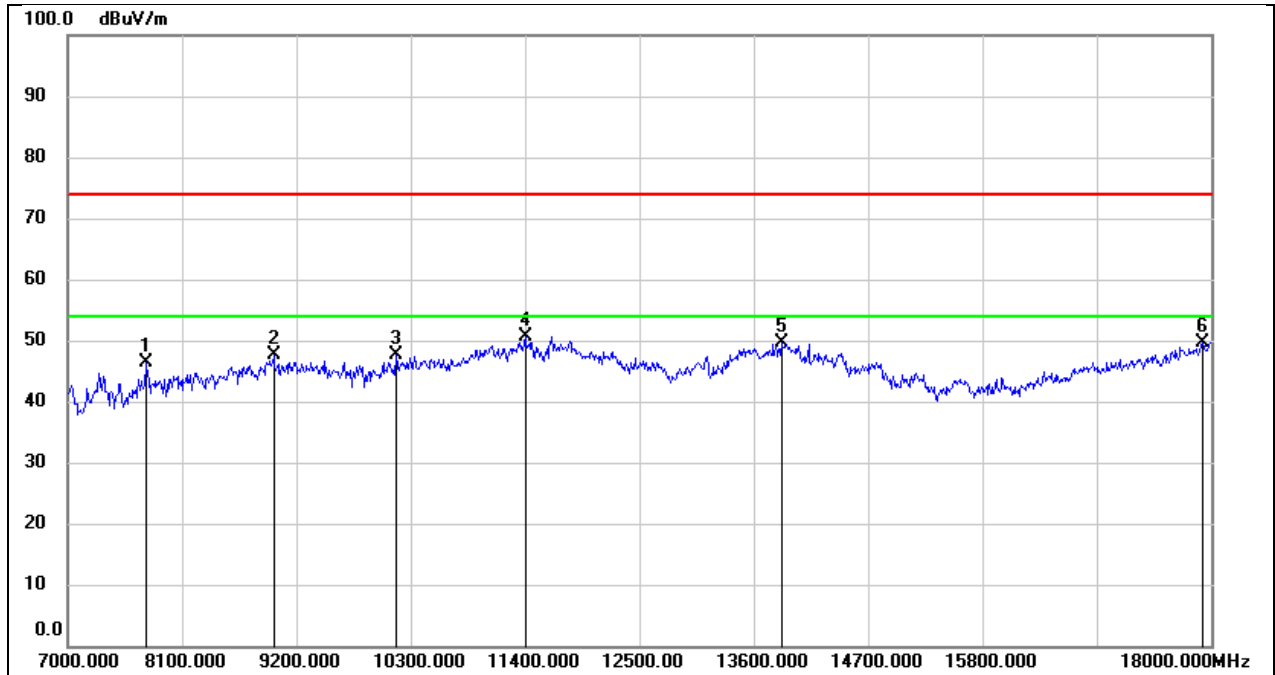


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	39.51	6.79	46.30	74.00	-27.70	peak
2	8980.000	35.99	11.57	47.56	74.00	-26.44	peak
3	10157.000	35.30	12.30	47.60	74.00	-26.40	peak
4	11400.000	34.07	16.57	50.64	74.00	-23.36	peak
5	13864.000	27.06	22.45	49.51	74.00	-24.49	peak
6	17923.000	23.07	26.64	49.71	74.00	-24.29	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

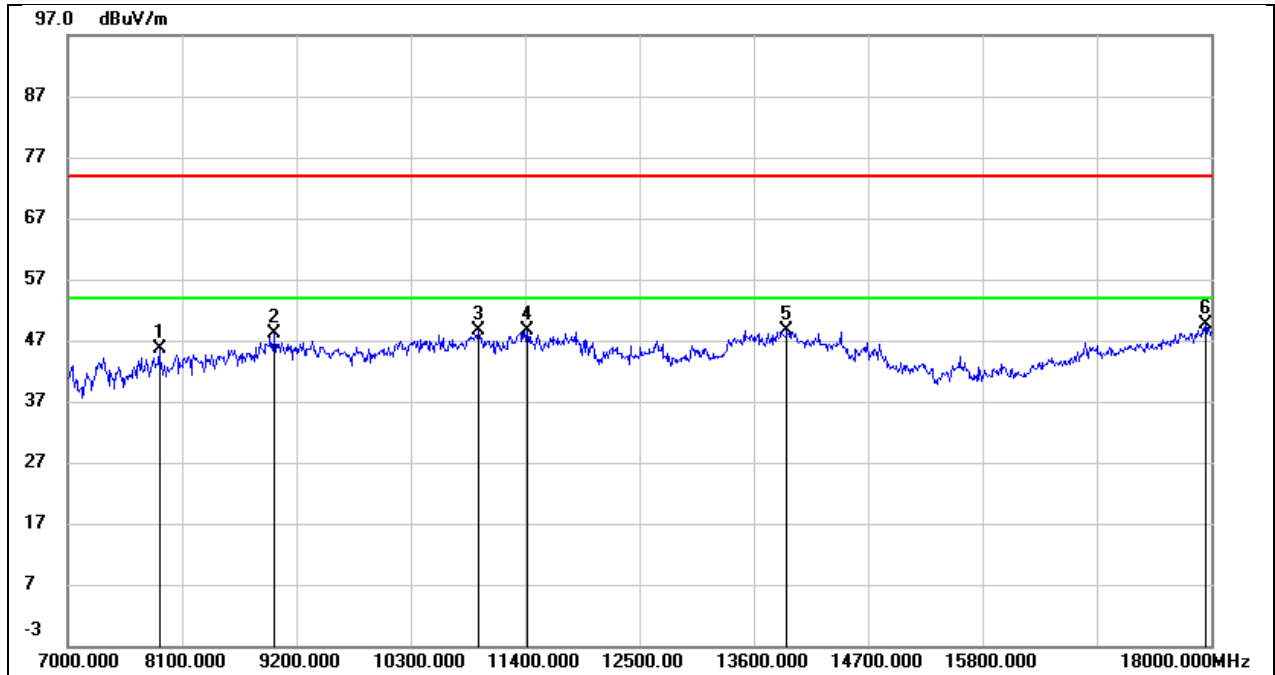


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	38.67	6.86	45.53	74.00	-28.47	peak
2	8991.000	36.31	11.73	48.04	74.00	-25.96	peak
3	10949.000	33.89	14.62	48.51	74.00	-25.49	peak
4	11422.000	31.99	16.64	48.63	74.00	-25.37	peak
5	13919.000	26.21	22.49	48.70	74.00	-25.30	peak
6	17945.000	22.92	26.74	49.66	74.00	-24.34	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

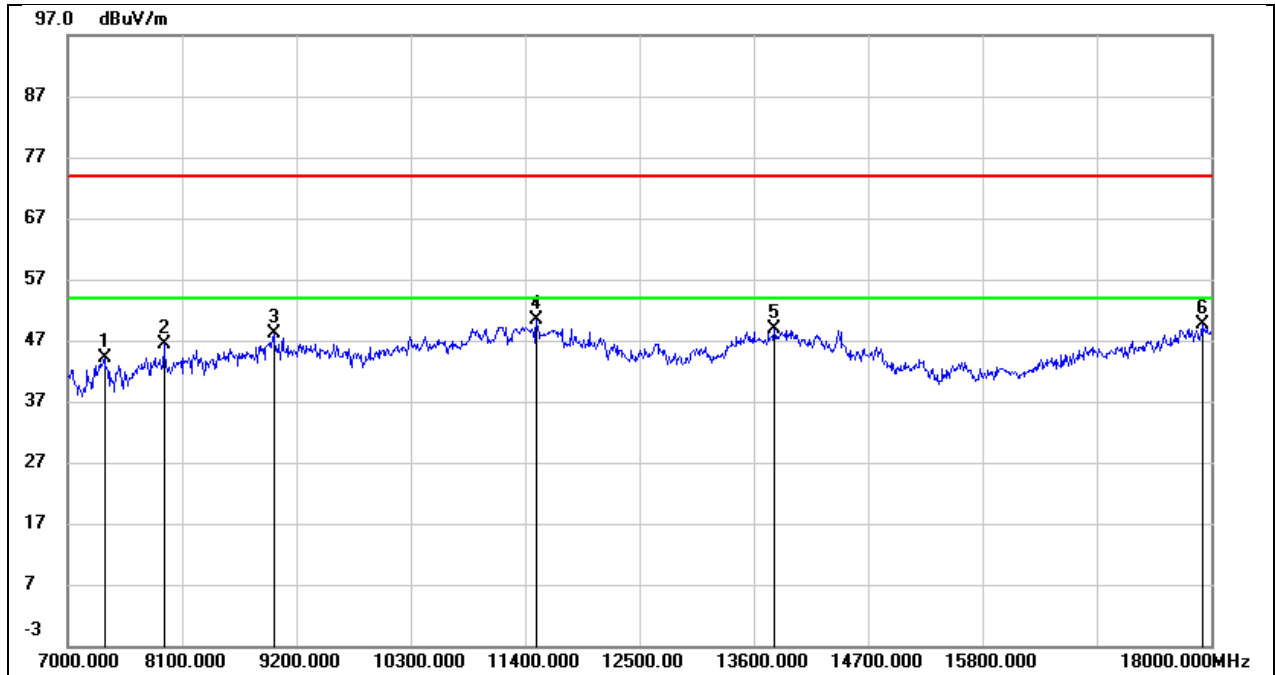


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.07	8.07	44.14	74.00	-29.86	peak
2	7924.000	39.40	6.86	46.26	74.00	-27.74	peak
3	8980.000	36.67	11.57	48.24	74.00	-25.76	peak
4	11510.000	33.53	16.90	50.43	74.00	-23.57	peak
5	13798.000	26.36	22.41	48.77	74.00	-25.23	peak
6	17912.000	22.99	26.60	49.59	74.00	-24.41	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

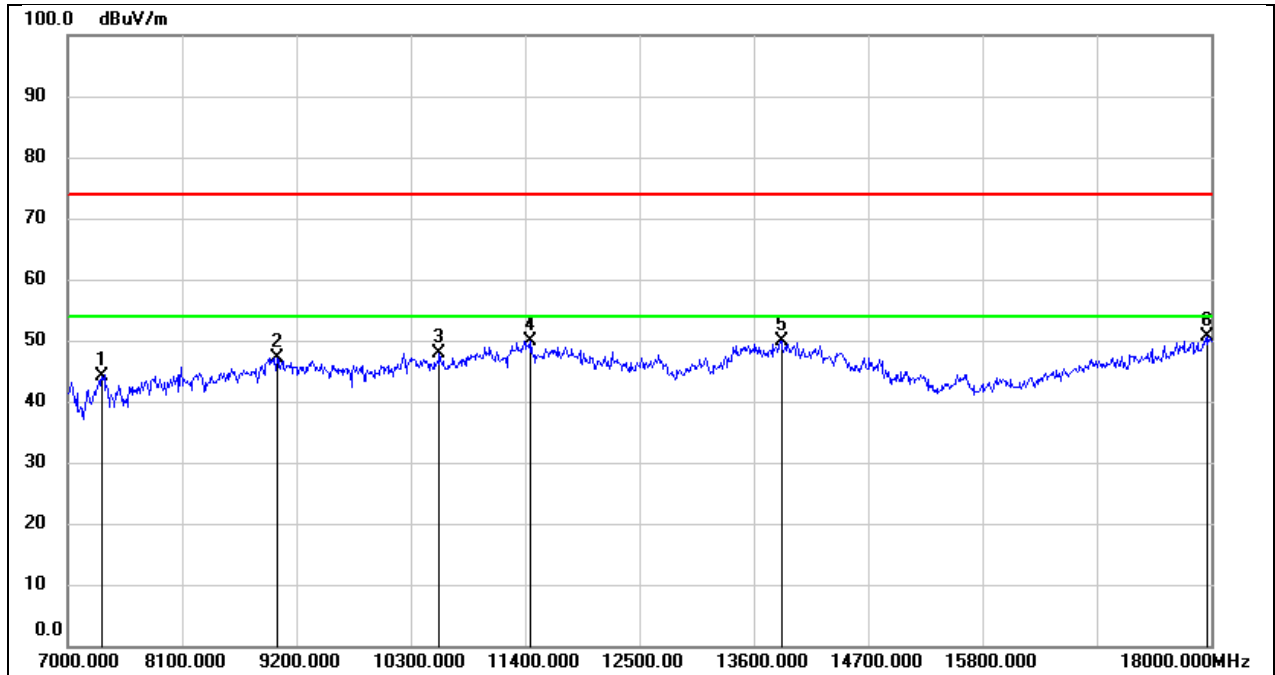


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	36.20	7.91	44.11	74.00	-29.89	peak
2	9013.000	35.45	11.75	47.20	74.00	-26.80	peak
3	10575.000	34.25	13.70	47.95	74.00	-26.05	peak
4	11455.000	33.13	16.74	49.87	74.00	-24.13	peak
5	13864.000	27.50	22.45	49.95	74.00	-24.05	peak
6	17967.000	23.91	26.83	50.74	74.00	-23.26	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

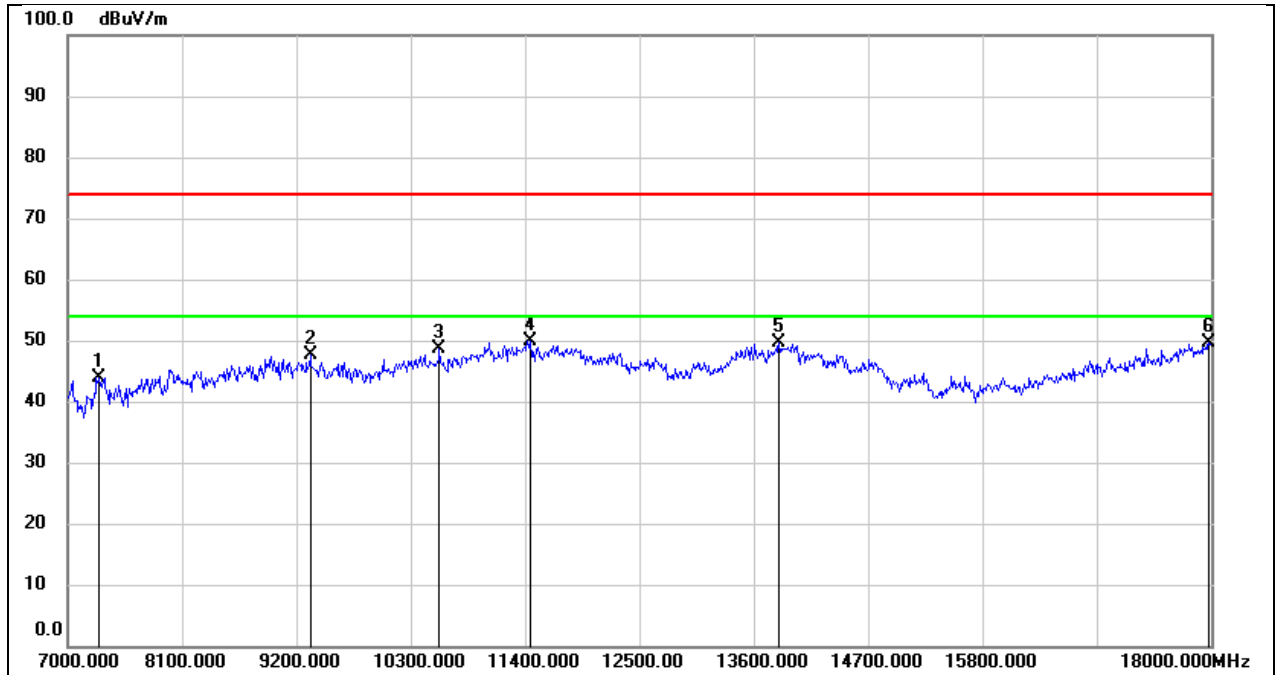


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.32	7.65	43.97	74.00	-30.03	peak
2	9332.000	37.06	10.45	47.51	74.00	-26.49	peak
3	10575.000	34.99	13.70	48.69	74.00	-25.31	peak
4	11455.000	33.24	16.74	49.98	74.00	-24.02	peak
5	13842.000	27.30	22.44	49.74	74.00	-24.26	peak
6	17978.000	22.70	26.88	49.58	74.00	-24.42	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

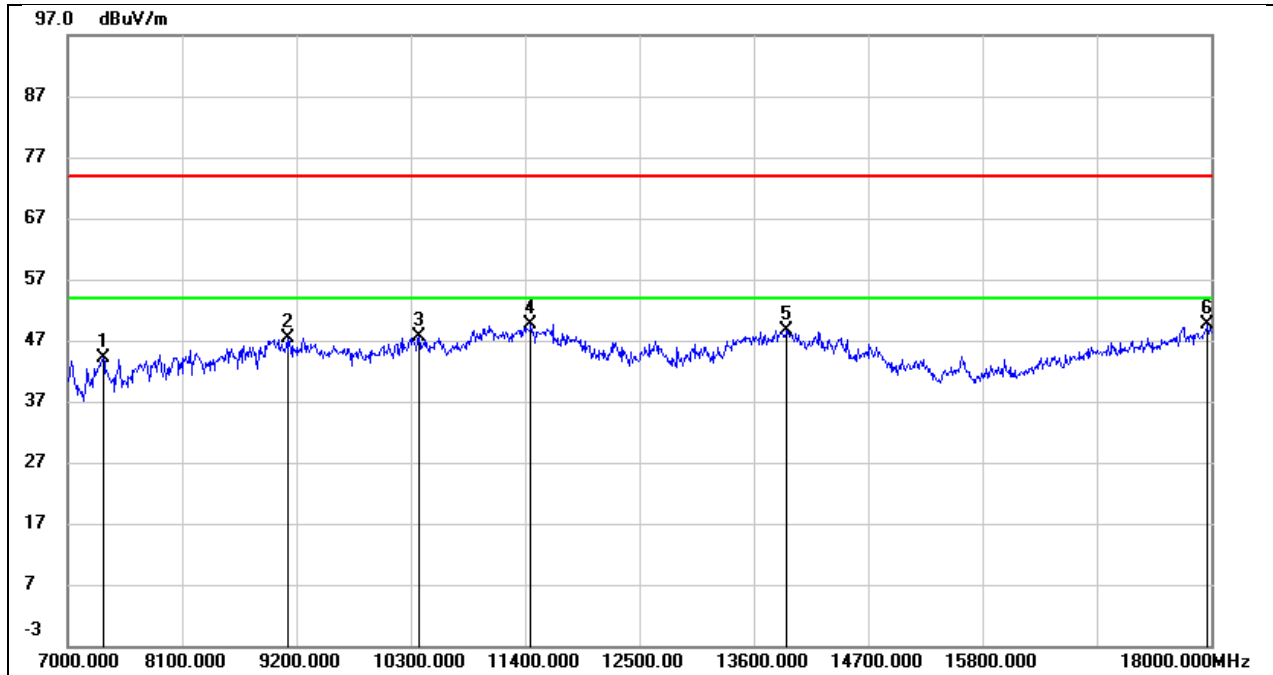


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.01	8.00	44.01	74.00	-29.99	peak
2	9112.000	36.63	10.85	47.48	74.00	-26.52	peak
3	10377.000	34.48	13.13	47.61	74.00	-26.39	peak
4	11455.000	32.80	16.74	49.54	74.00	-24.46	peak
5	13919.000	26.20	22.49	48.69	74.00	-25.31	peak
6	17967.000	22.71	26.83	49.54	74.00	-24.46	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

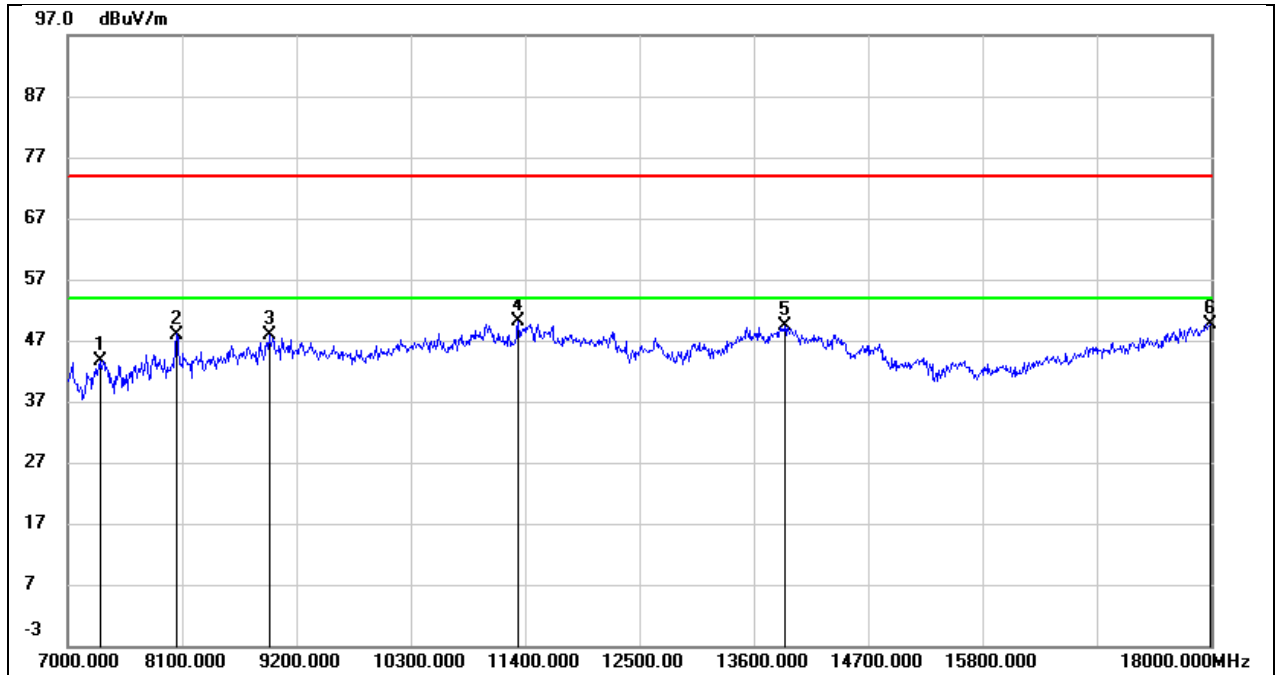


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	35.93	7.73	43.66	74.00	-30.34	peak
2	8045.000	40.73	7.27	48.00	74.00	-26.00	peak
3	8936.000	37.01	10.91	47.92	74.00	-26.08	peak
4	11334.000	33.94	16.16	50.10	74.00	-23.90	peak
5	13897.000	26.80	22.47	49.27	74.00	-24.73	peak
6	17989.000	22.74	26.92	49.66	74.00	-24.34	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

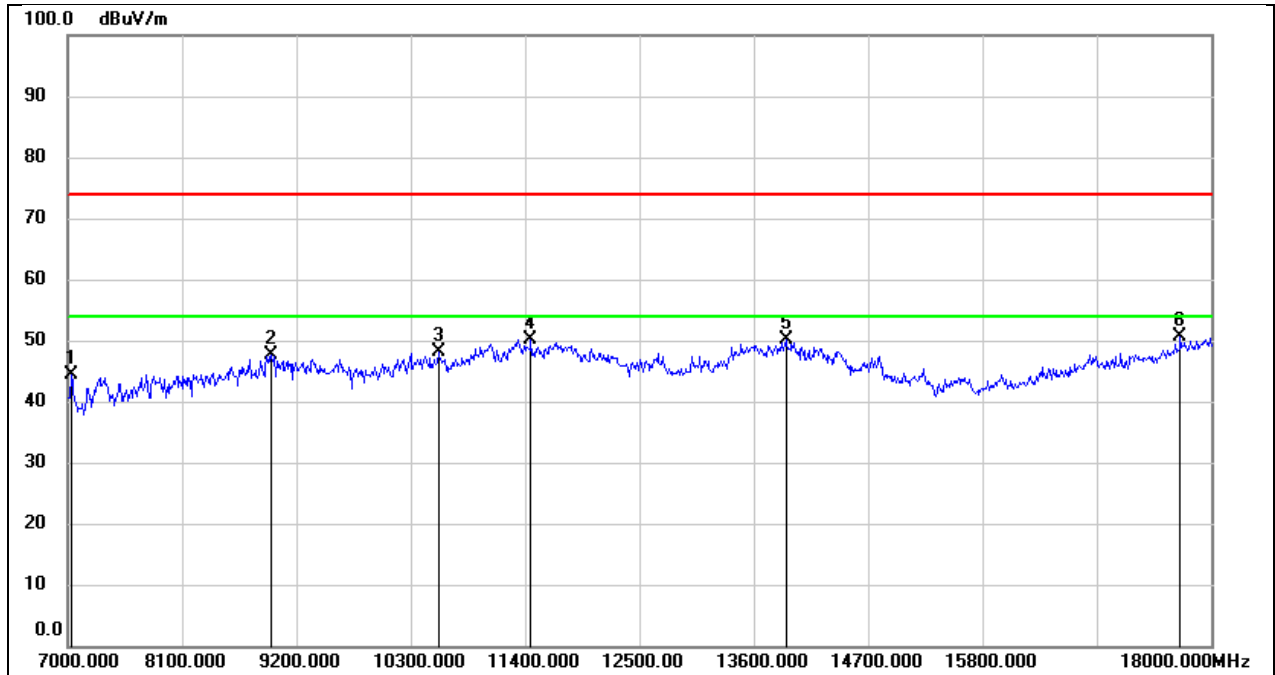


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7033.000	36.92	7.58	44.50	74.00	-29.50	peak
2	8958.000	36.36	11.24	47.60	74.00	-26.40	peak
3	10564.000	34.41	13.68	48.09	74.00	-25.91	peak
4	11455.000	33.34	16.74	50.08	74.00	-23.92	peak
5	13908.000	27.60	22.49	50.09	74.00	-23.91	peak
6	17703.000	25.51	25.01	50.52	74.00	-23.48	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5 V

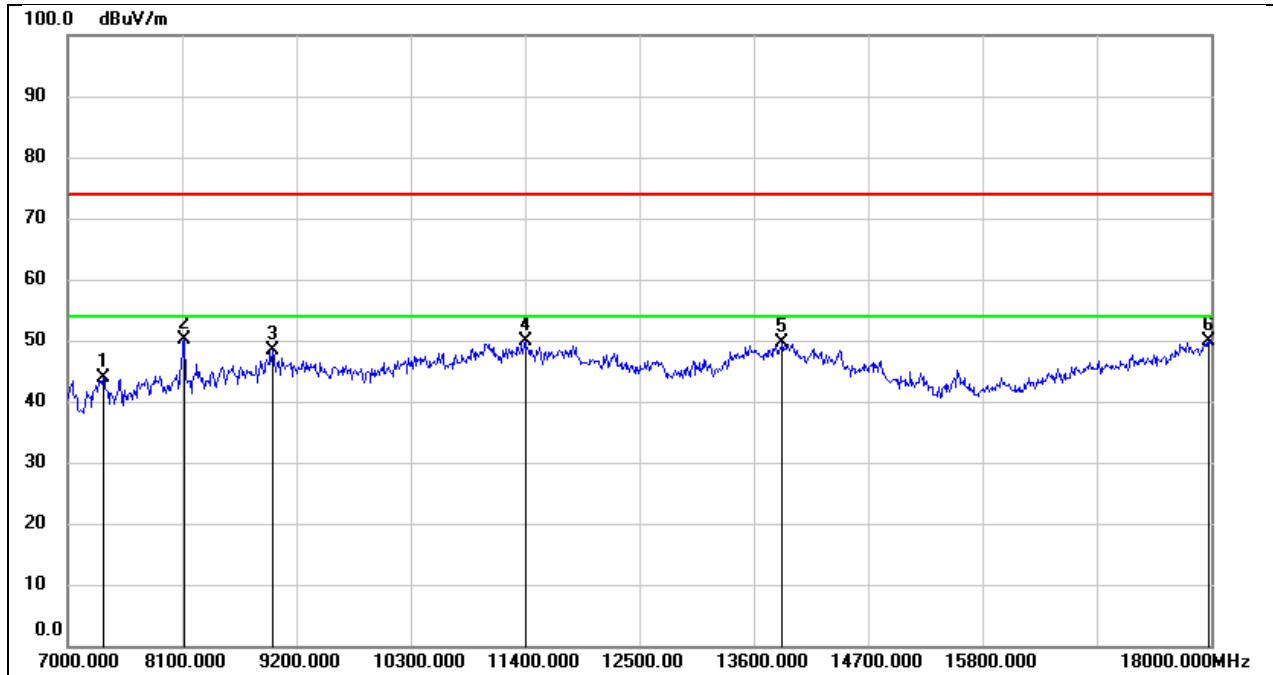


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.81	8.00	43.81	74.00	-30.19	peak
2	8122.000	42.29	7.93	50.22	74.00	-23.78	peak
3	8969.000	36.97	11.40	48.37	74.00	-25.63	peak
4	11400.000	33.41	16.57	49.98	74.00	-24.02	peak
5	13875.000	27.10	22.46	49.56	74.00	-24.44	peak
6	17978.000	23.08	26.88	49.96	74.00	-24.04	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5 V

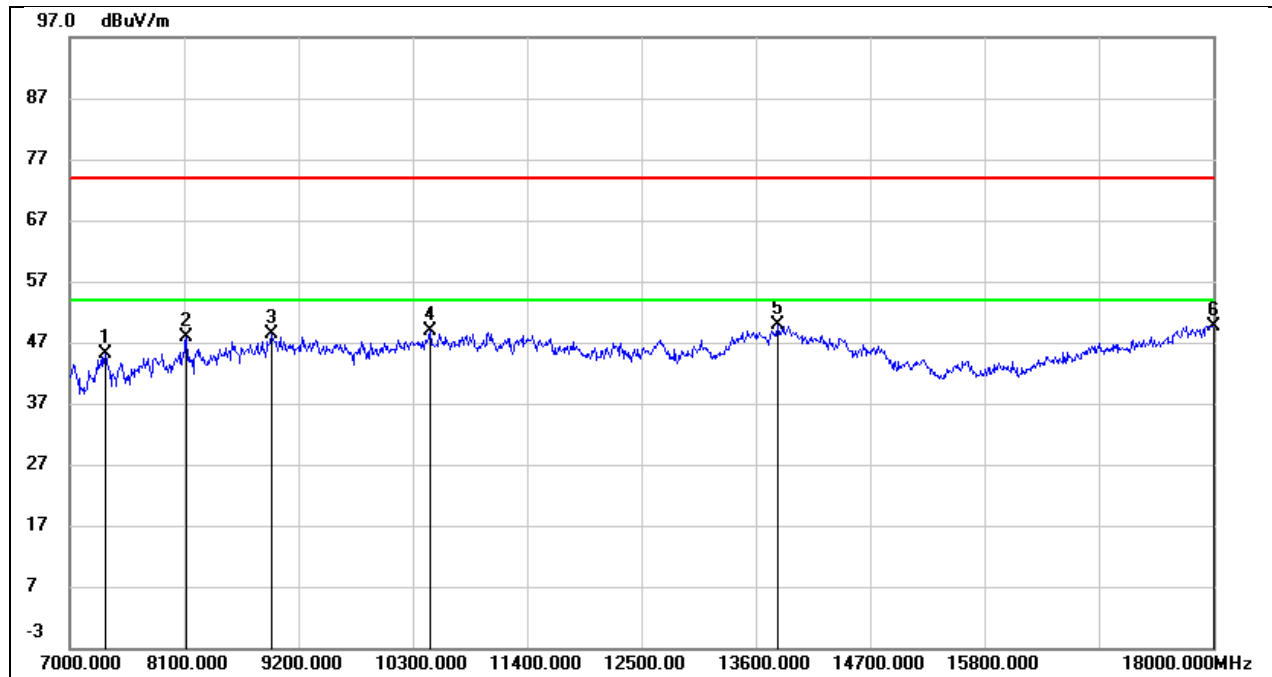


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.07	8.00	45.07	74.00	-28.93	peak
2	8122.000	39.84	7.93	47.77	74.00	-26.23	peak
3	8936.000	37.35	10.91	48.26	74.00	-25.74	peak
4	10465.000	35.47	13.41	48.88	74.00	-25.12	peak
5	13809.000	27.43	22.43	49.86	74.00	-24.14	peak
6	18000.000	22.69	26.97	49.66	74.00	-24.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

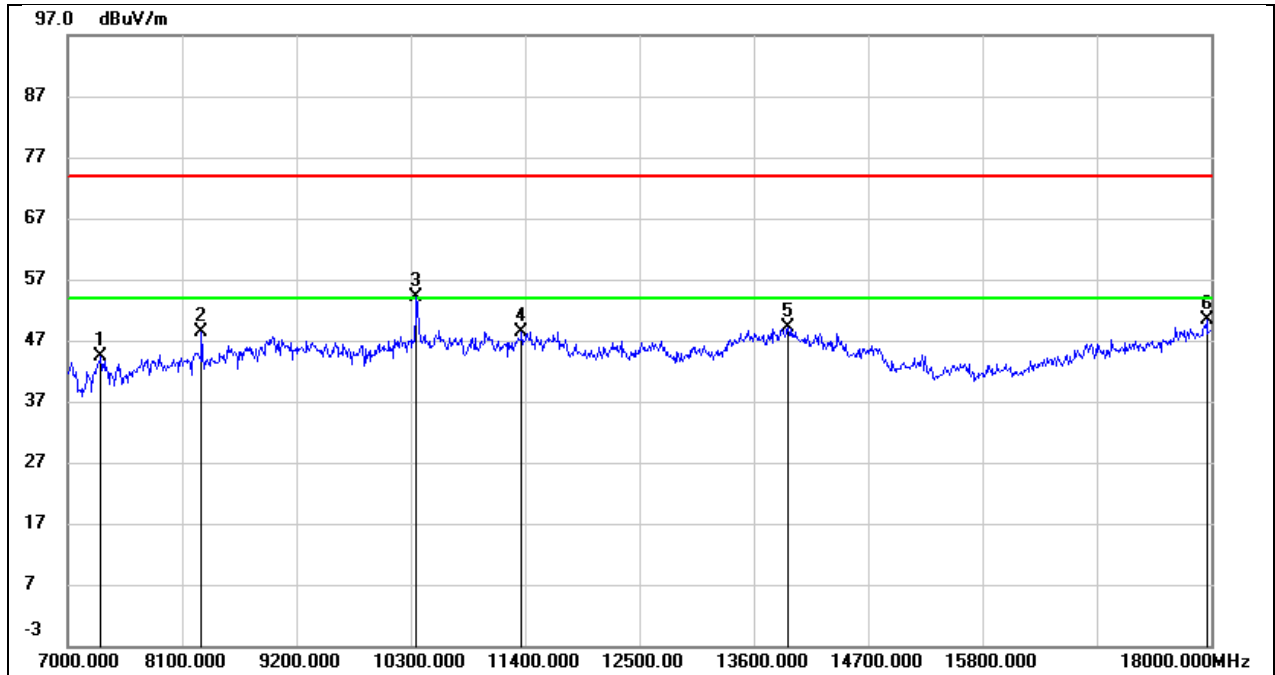


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.56	7.82	44.38	74.00	-29.62	peak
2	8287.000	40.21	8.28	48.49	74.00	-25.51	peak
3*	10355.000	41.01	13.03	54.04	68.20	-14.16	peak
4	11367.000	32.13	16.37	48.50	74.00	-25.50	peak
5	13930.000	26.67	22.50	49.17	74.00	-24.83	peak
6	17956.000	23.48	26.78	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

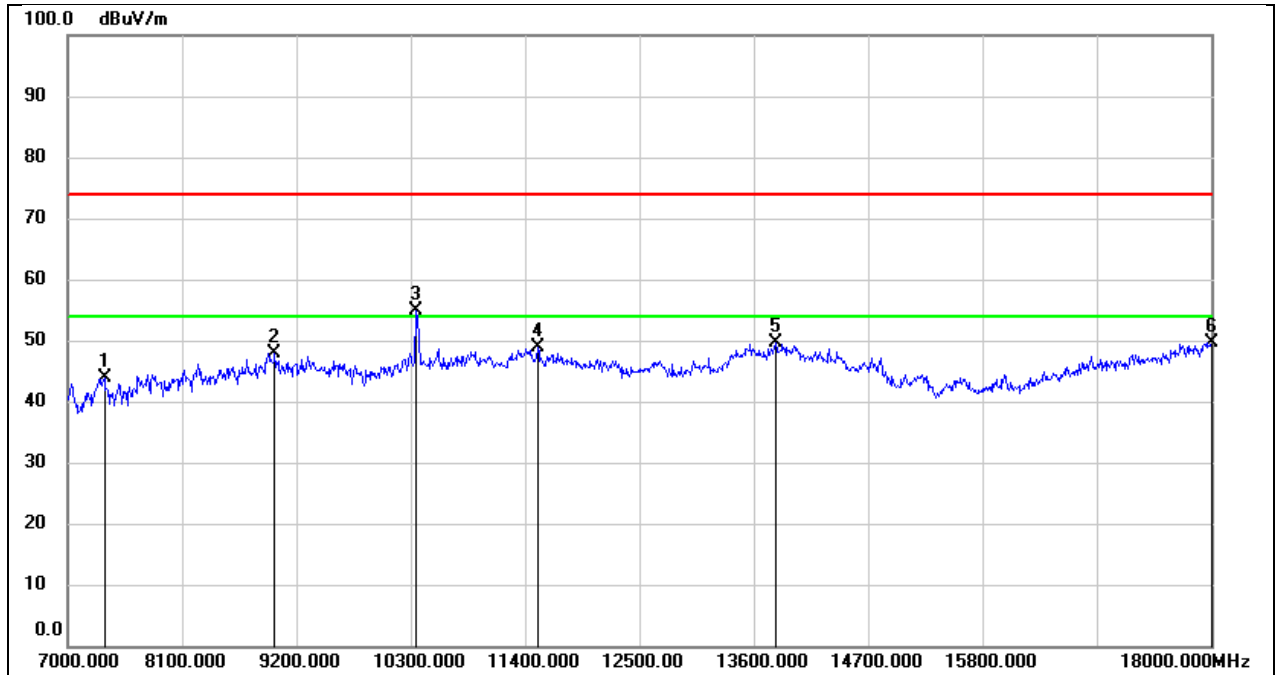


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.76	8.07	43.83	74.00	-30.17	peak
2	8991.000	36.25	11.73	47.98	74.00	-26.02	peak
3*	10344.000	41.89	12.98	54.87	68.20	-13.33	peak
4	11521.000	31.93	16.92	48.85	74.00	-25.15	peak
5	13809.000	27.13	22.43	49.56	74.00	-24.44	peak
6	18000.000	22.71	26.97	49.68	74.00	-24.32	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 5 V

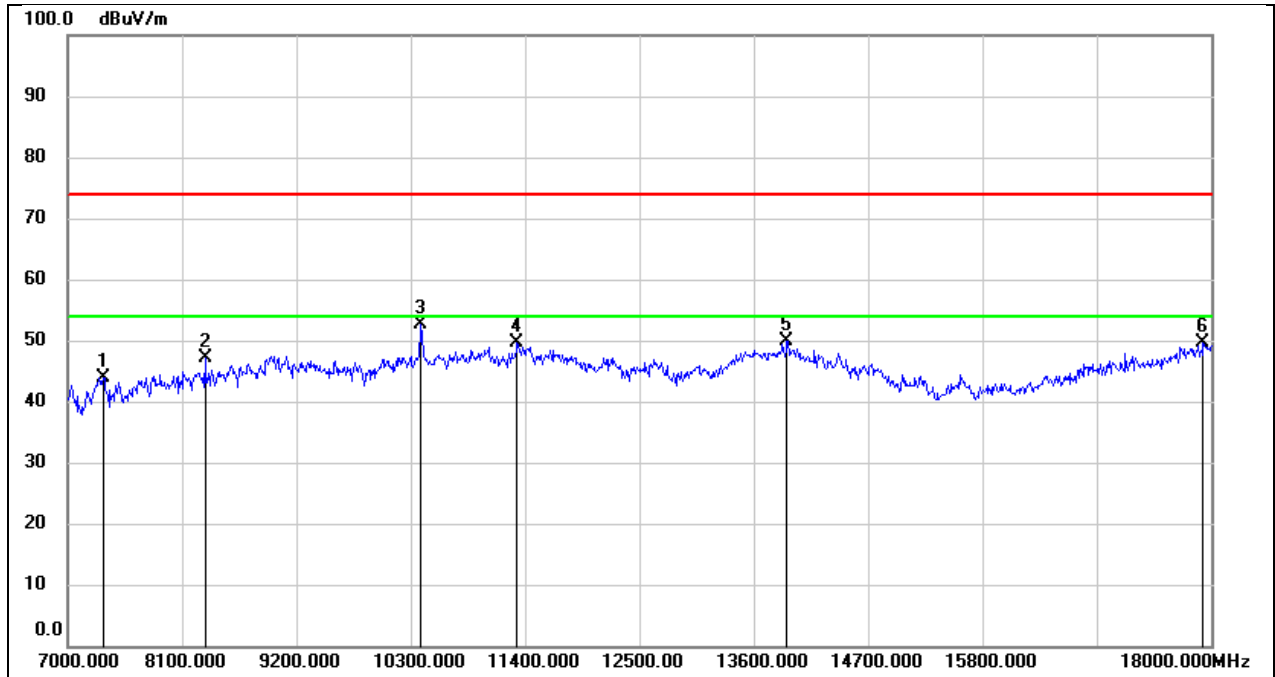


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.99	8.00	43.99	74.00	-30.01	peak
2	8320.000	39.02	8.14	47.16	74.00	-26.84	peak
3	10399.000	39.43	13.23	52.66	74.00	-21.34	peak
4	11323.000	33.53	16.10	49.63	74.00	-24.37	peak
5	13919.000	27.31	22.49	49.80	74.00	-24.20	peak
6	17923.000	22.96	26.64	49.60	74.00	-24.40	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 5 V

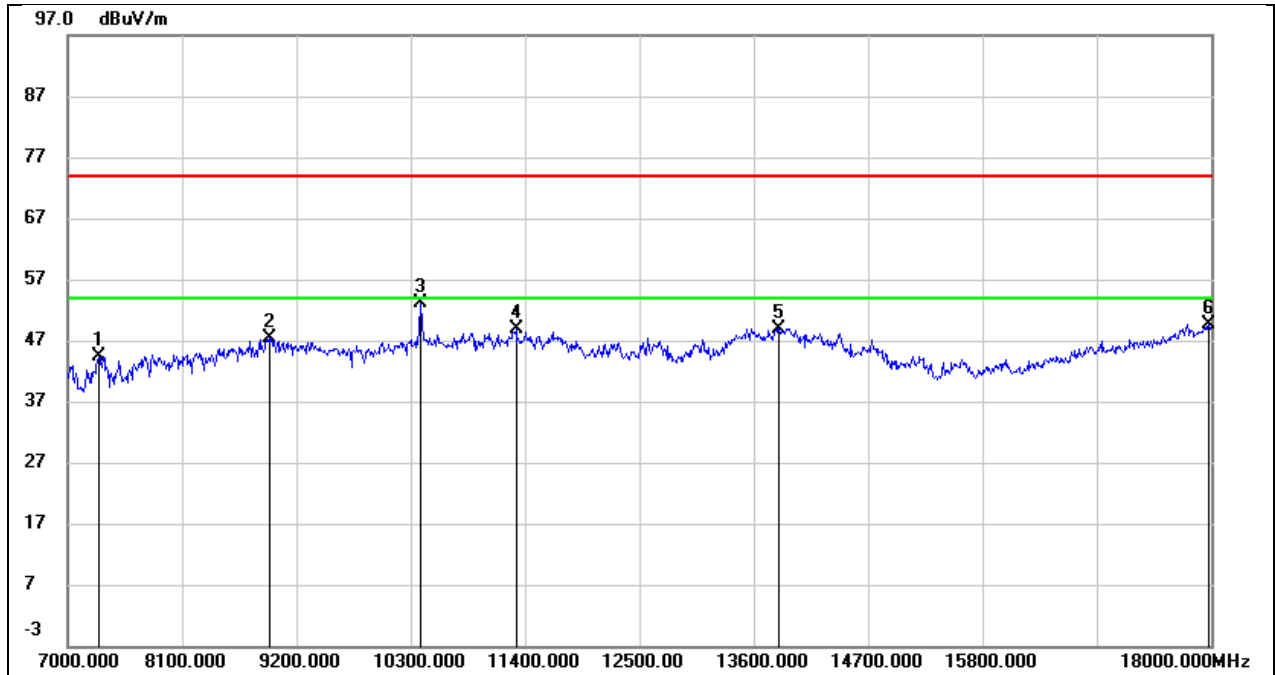


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.65	7.65	44.30	74.00	-29.70	peak
2	8936.000	36.51	10.91	47.42	74.00	-26.58	peak
3	10399.000	39.80	13.23	53.03	74.00	-20.97	peak
4	11312.000	32.73	16.03	48.76	74.00	-25.24	peak
5	13842.000	26.54	22.44	48.98	74.00	-25.02	peak
6	17978.000	22.69	26.88	49.57	74.00	-24.43	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 5 V

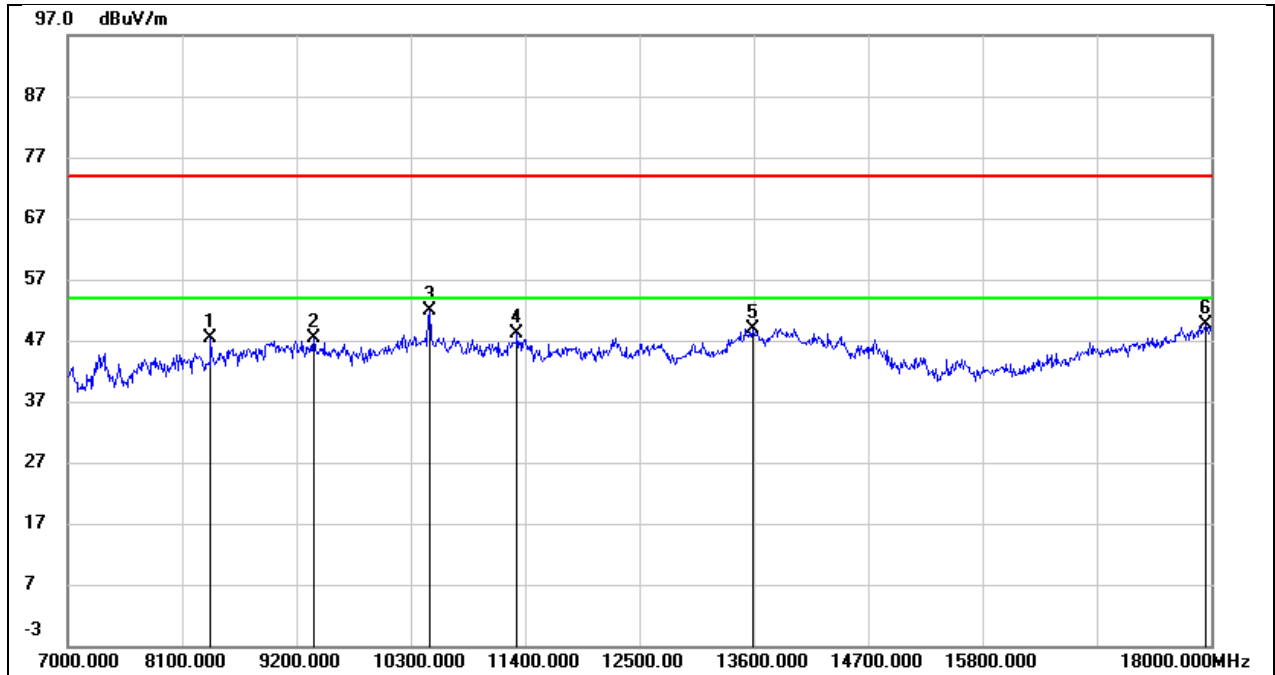


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8375.000	39.44	7.93	47.37	74.00	-26.63	peak
2	9365.000	36.82	10.55	47.37	74.00	-26.63	peak
3	10487.000	38.45	13.46	51.91	74.00	-22.09	peak
4	11323.000	31.91	16.10	48.01	74.00	-25.99	peak
5	13589.000	27.43	21.41	48.84	74.00	-25.16	peak
6	17945.000	22.85	26.74	49.59	74.00	-24.41	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 5 V

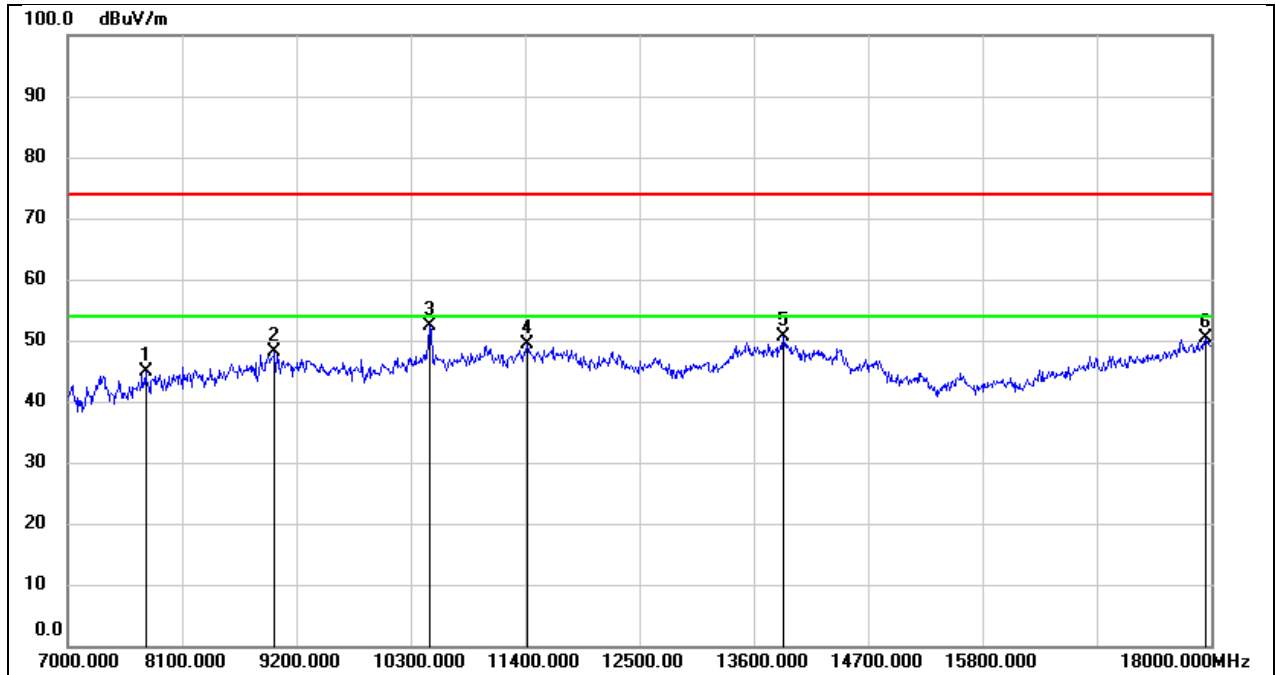


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	38.08	6.79	44.87	74.00	-29.13	peak
2	8991.000	36.37	11.73	48.10	74.00	-25.90	peak
3	10476.000	38.85	13.44	52.29	74.00	-21.71	peak
4	11422.000	32.74	16.64	49.38	74.00	-24.62	peak
5	13886.000	28.04	22.48	50.52	74.00	-23.48	peak
6	17945.000	23.61	26.74	50.35	74.00	-23.65	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 5 V

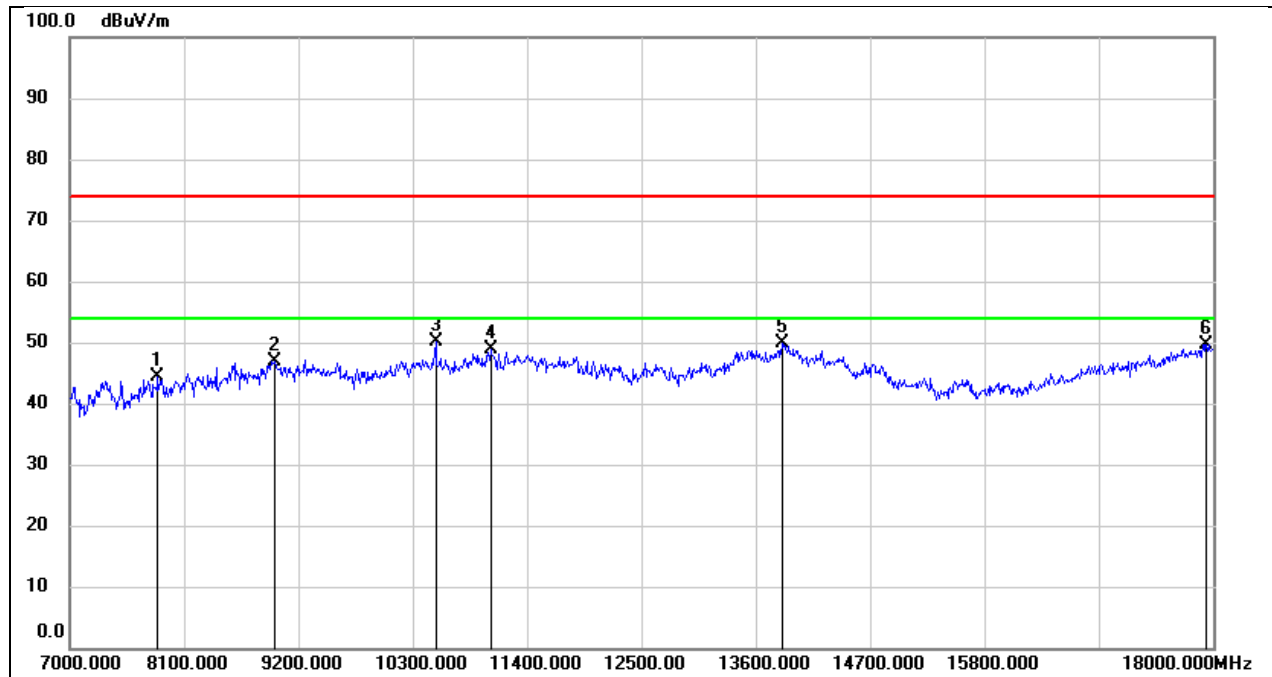


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7847.000	37.46	6.86	44.32	74.00	-29.68	peak
2	8969.000	35.54	11.40	46.94	74.00	-27.06	peak
3	10520.000	36.66	13.56	50.22	74.00	-23.78	peak
4	11048.000	33.87	14.99	48.86	74.00	-25.14	peak
5	13853.000	27.53	22.46	49.99	74.00	-24.01	peak
6	17934.000	23.04	26.69	49.73	74.00	-24.27	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 5 V

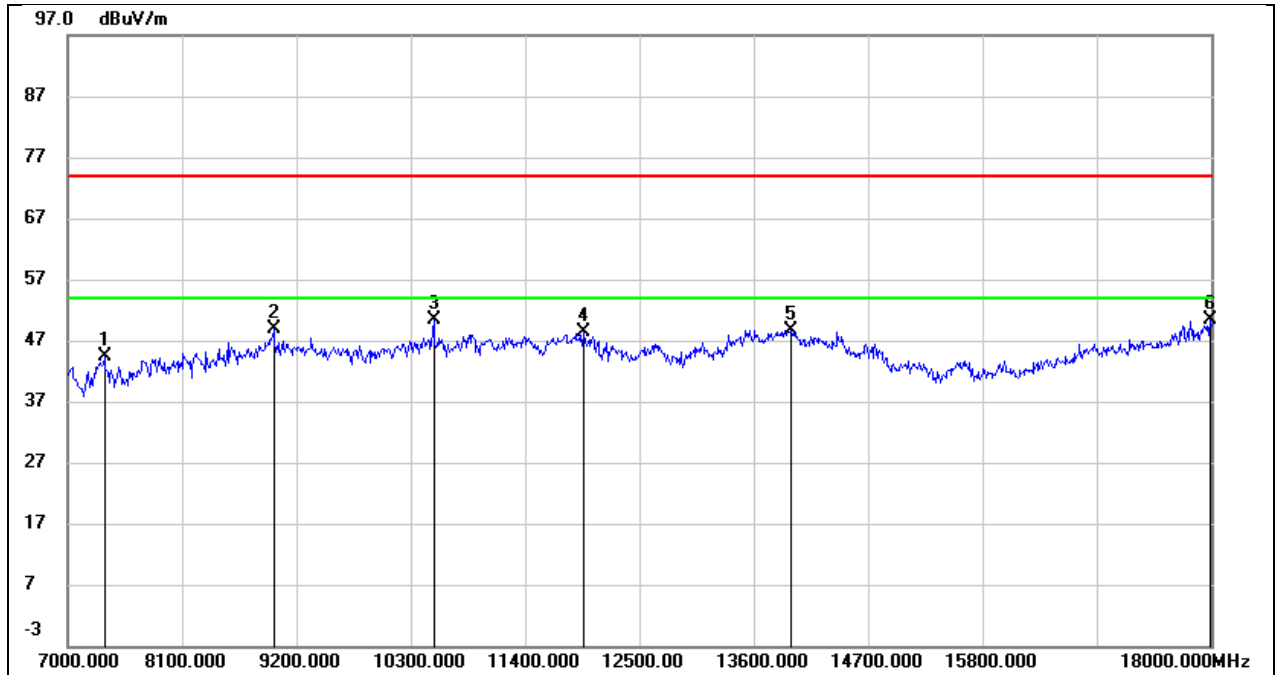


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.37	8.07	44.44	74.00	-29.56	peak
2	8980.000	37.36	11.57	48.93	74.00	-25.07	peak
3	10520.000	36.74	13.56	50.30	74.00	-23.70	peak
4	11961.000	29.88	18.40	48.28	74.00	-25.72	peak
5	13963.000	26.22	22.51	48.73	74.00	-25.27	peak
6	17989.000	23.34	26.92	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 5 V

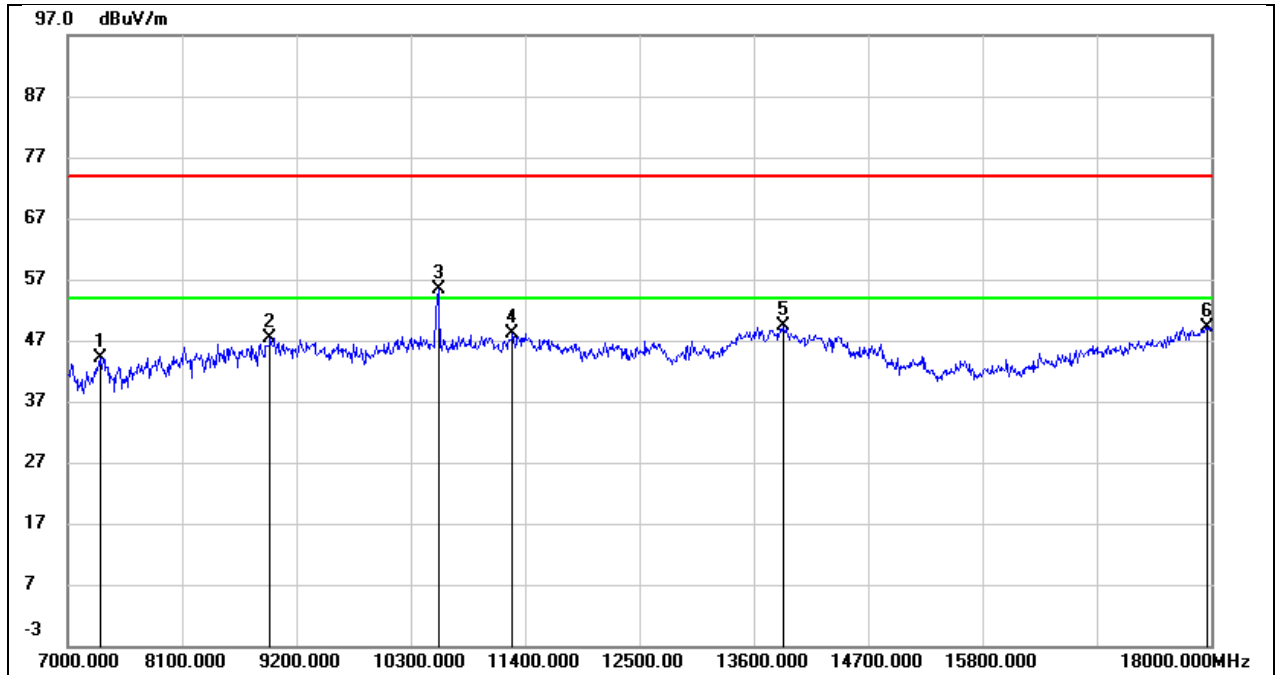


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.41	7.73	44.14	74.00	-29.86	peak
2	8947.000	36.28	11.08	47.36	74.00	-26.64	peak
3*	10564.000	41.71	13.68	55.39	68.20	-12.81	peak
4	11279.000	32.39	15.83	48.22	74.00	-25.78	peak
5	13886.000	26.97	22.48	49.45	74.00	-24.55	peak
6	17956.000	22.32	26.78	49.10	74.00	-24.90	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 5 V

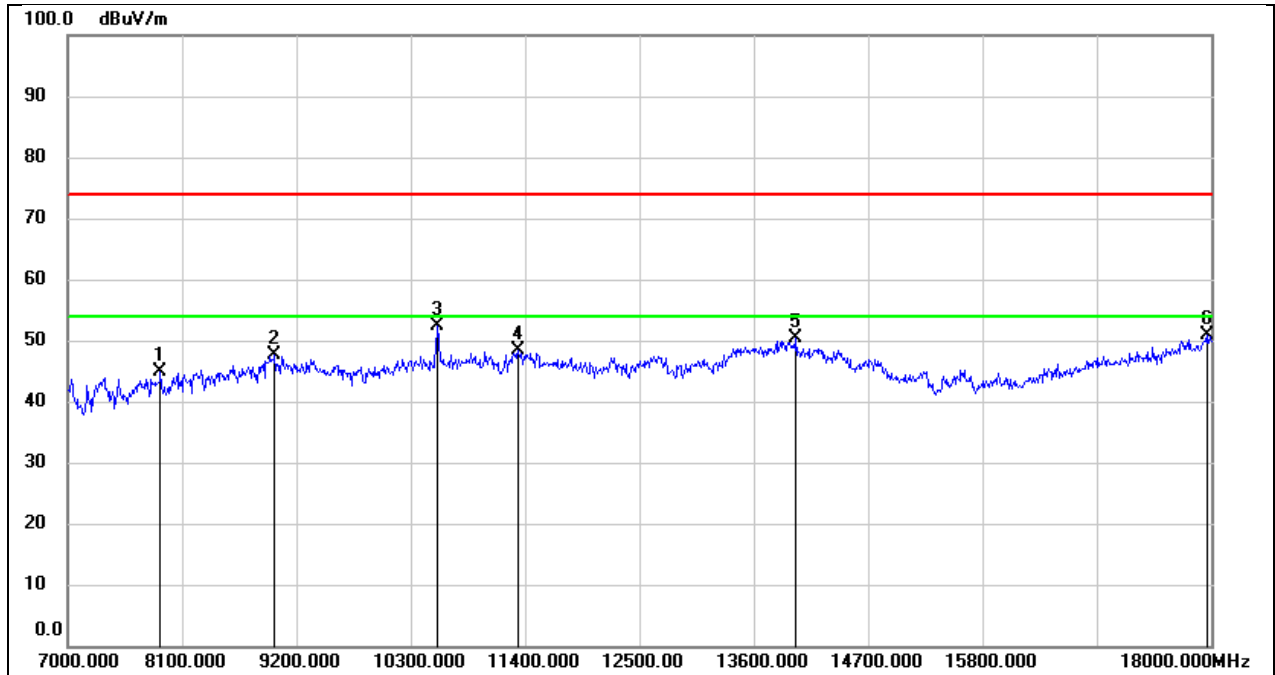


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	37.95	6.85	44.80	74.00	-29.20	peak
2	8991.000	36.00	11.73	47.73	74.00	-26.27	peak
3	10553.000	38.69	13.64	52.33	74.00	-21.67	peak
4	11334.000	32.10	16.16	48.26	74.00	-25.74	peak
5	14007.000	27.93	22.53	50.46	74.00	-23.54	peak
6	17956.000	24.00	26.78	50.78	74.00	-23.22	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5 V

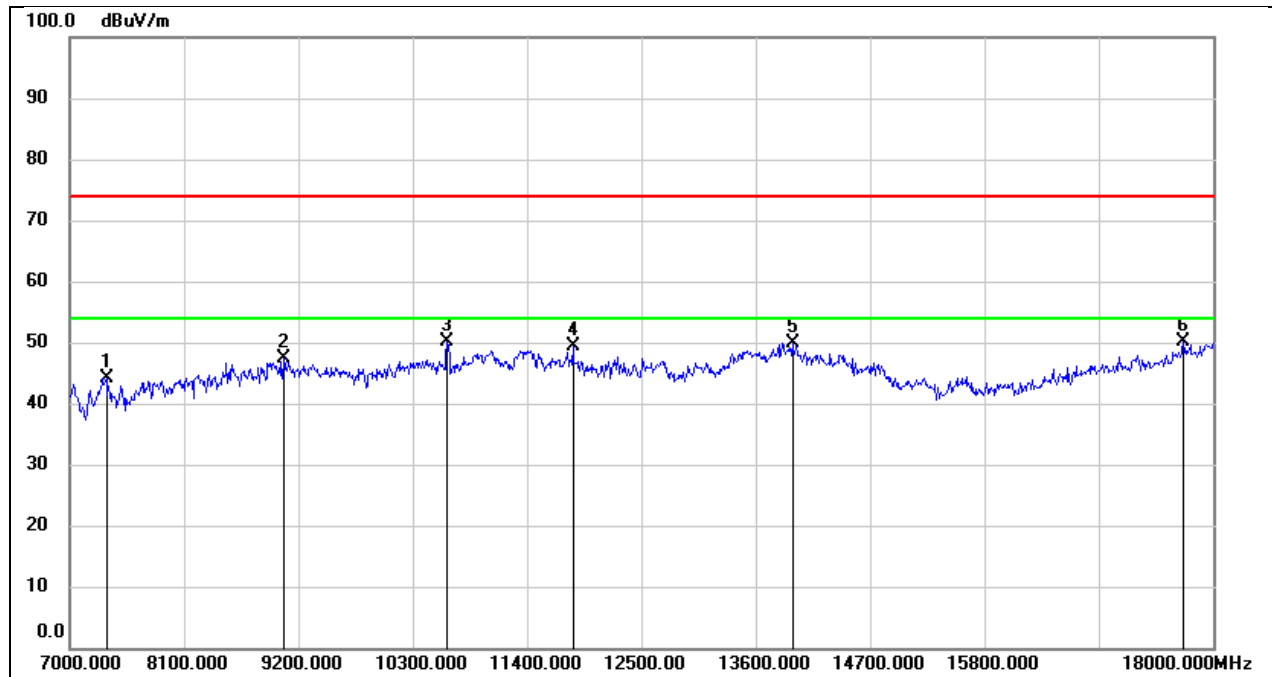


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.08	8.07	44.15	74.00	-29.85	peak
2	9057.000	36.04	11.35	47.39	74.00	-26.61	peak
3	10630.000	36.35	13.78	50.13	74.00	-23.87	peak
4	11840.000	31.68	17.76	49.44	74.00	-24.56	peak
5	13952.000	27.44	22.51	49.95	74.00	-24.05	peak
6	17714.000	25.10	25.14	50.24	74.00	-23.76	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

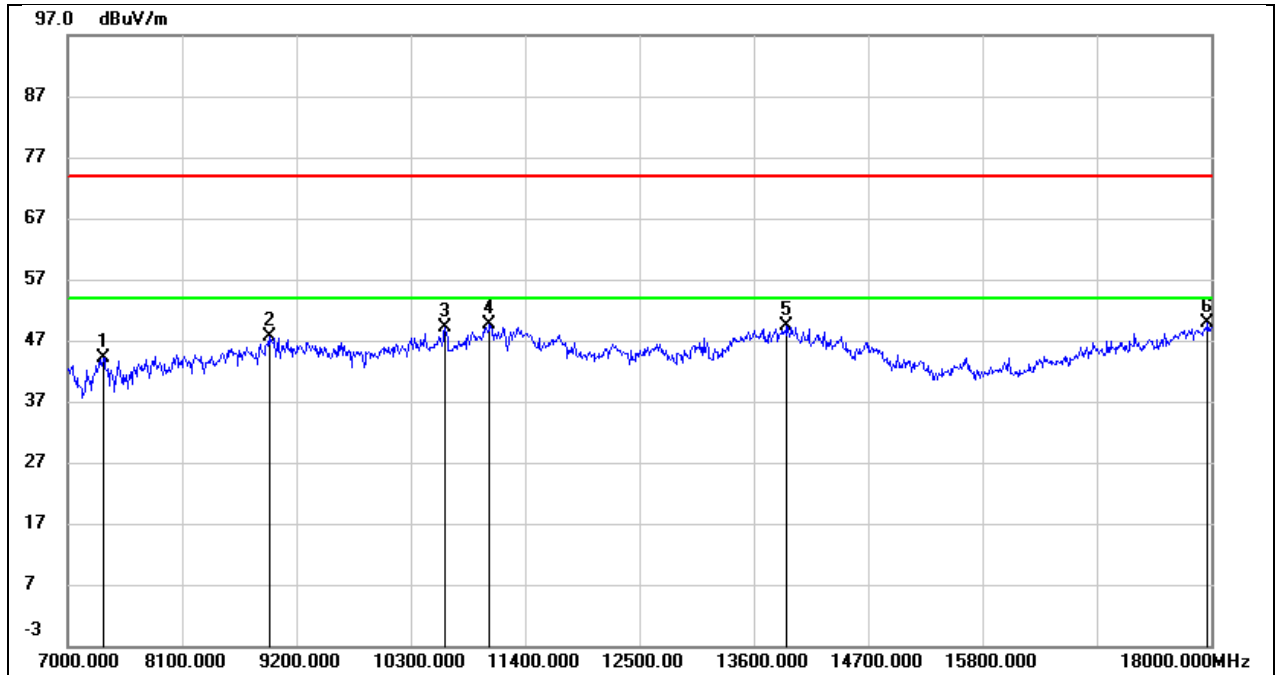


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.09	8.00	44.09	74.00	-29.91	peak
2	8936.000	36.67	10.91	47.58	74.00	-26.42	peak
3	10630.000	35.44	13.78	49.22	74.00	-24.78	peak
4	11059.000	34.71	15.02	49.73	74.00	-24.27	peak
5	13919.000	26.82	22.49	49.31	74.00	-24.69	peak
6	17967.000	23.12	26.83	49.95	74.00	-24.05	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

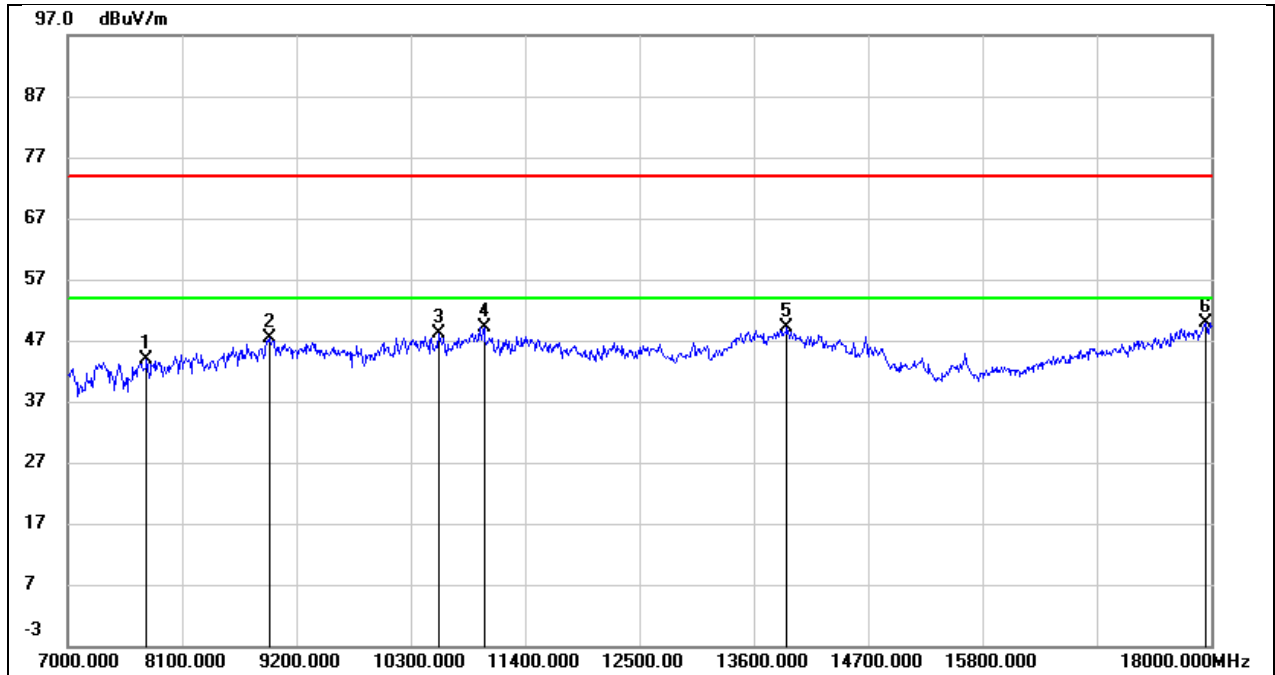


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	37.14	6.80	43.94	74.00	-30.06	peak
2	8936.000	36.47	10.91	47.38	74.00	-26.62	peak
3	10564.000	34.50	13.68	48.18	74.00	-25.82	peak
4	11004.000	34.31	14.90	49.21	74.00	-24.79	peak
5	13919.000	26.59	22.49	49.08	74.00	-24.92	peak
6	17945.000	23.18	26.74	49.92	74.00	-24.08	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

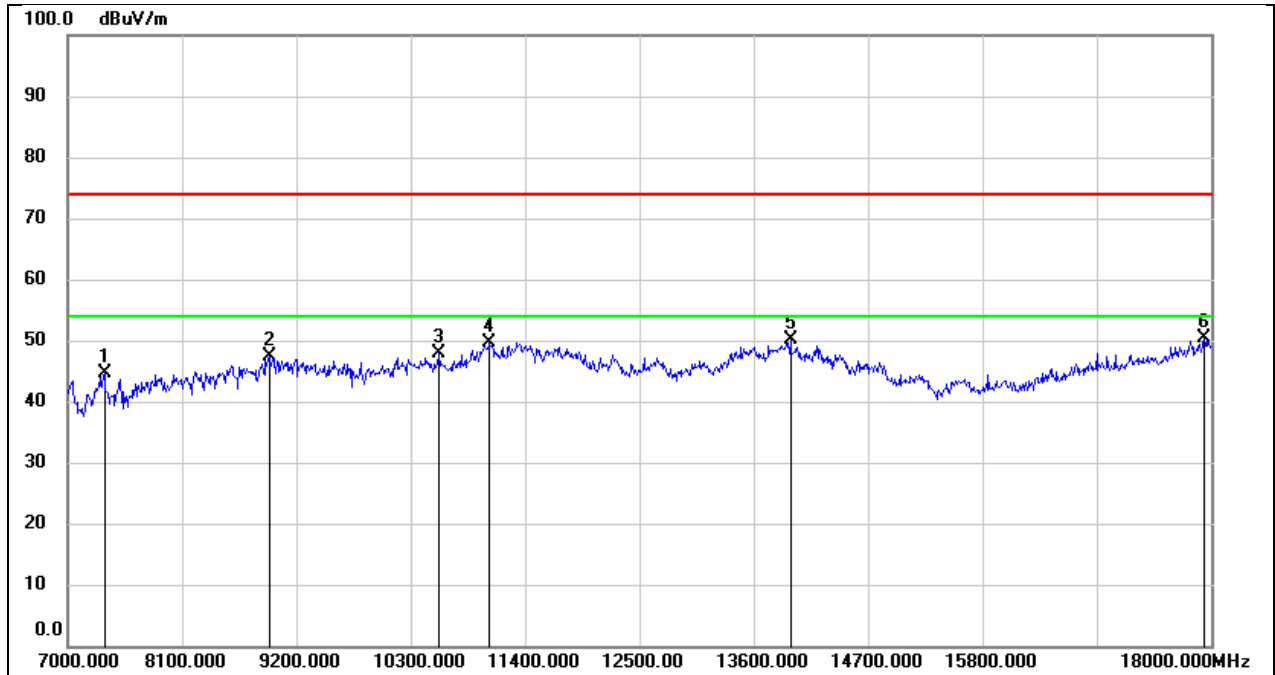


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.56	8.07	44.63	74.00	-29.37	peak
2	8936.000	36.49	10.91	47.40	74.00	-26.60	peak
3	10564.000	34.11	13.68	47.79	74.00	-26.21	peak
4	11059.000	34.57	15.02	49.59	74.00	-24.41	peak
5	13952.000	27.65	22.51	50.16	74.00	-23.84	peak
6	17934.000	23.77	26.69	50.46	74.00	-23.54	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

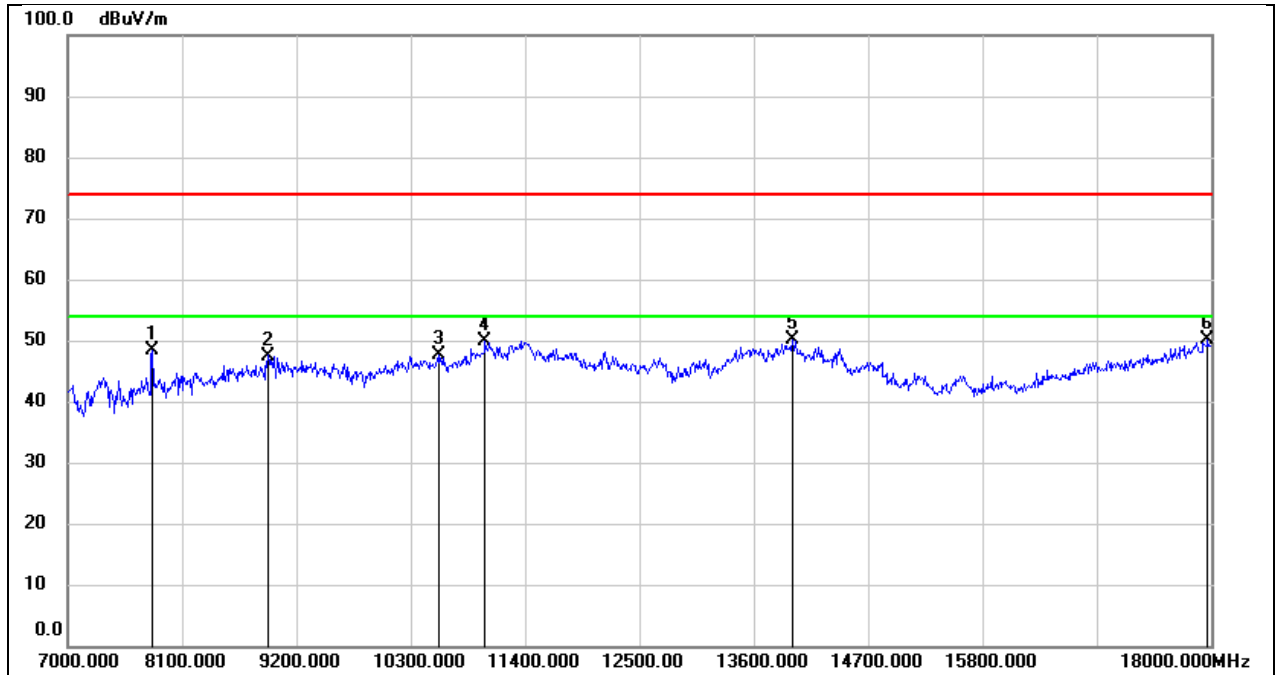


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7814.000	41.64	6.85	48.49	74.00	-25.51	peak
2	8925.000	36.75	10.75	47.50	74.00	-26.50	peak
3	10575.000	33.97	13.70	47.67	74.00	-26.33	peak
4	11015.000	34.97	14.93	49.90	74.00	-24.10	peak
5	13974.000	27.66	22.53	50.19	74.00	-23.81	peak
6	17967.000	23.32	26.83	50.15	74.00	-23.85	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

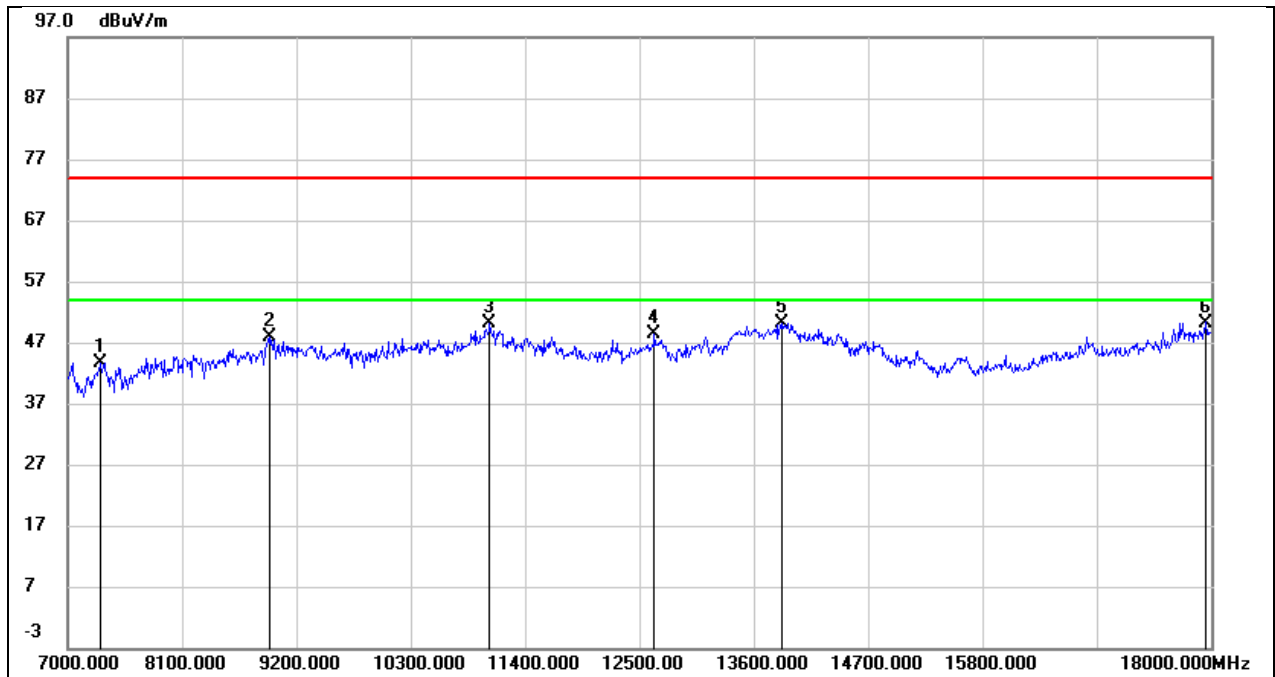


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	35.89	7.82	43.71	74.00	-30.29	peak
2	8936.000	36.98	10.91	47.89	74.00	-26.11	peak
3	11059.000	35.19	15.02	50.21	74.00	-23.79	peak
4	12643.000	29.89	18.43	48.32	74.00	-25.68	peak
5	13864.000	27.80	22.45	50.25	74.00	-23.75	peak
6	17945.000	23.51	26.74	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

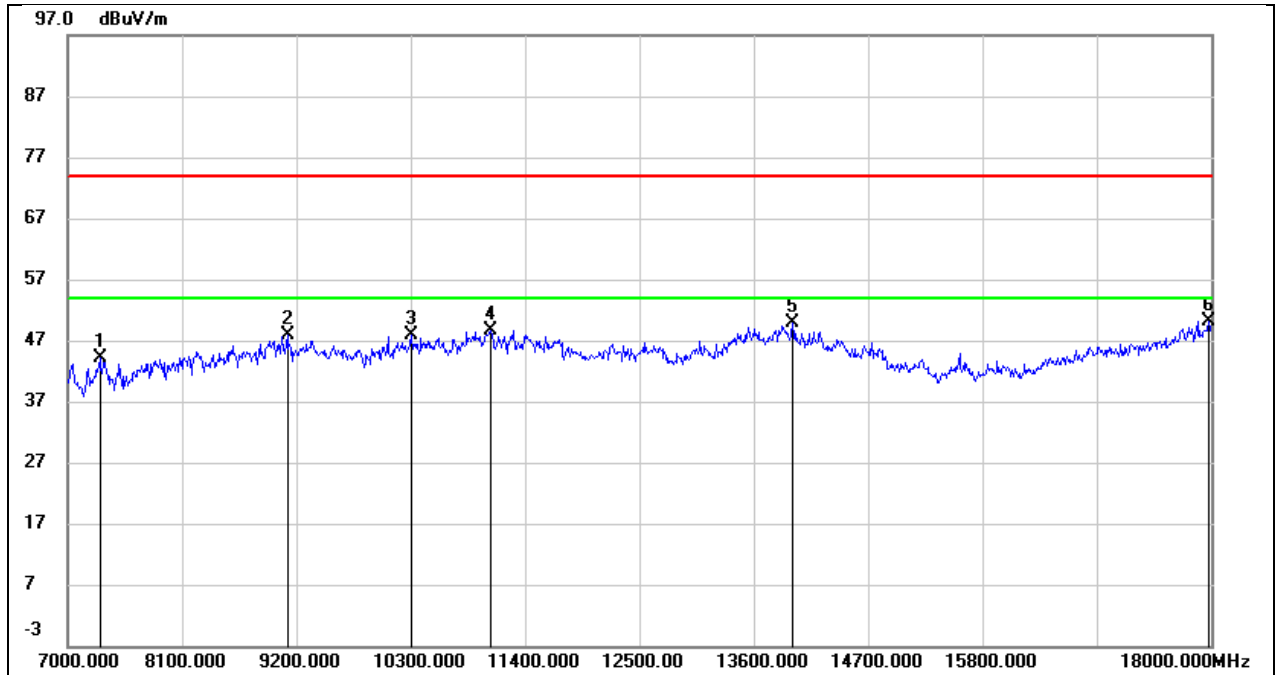


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.36	7.73	44.09	74.00	-29.91	peak
2	9112.000	37.03	10.85	47.88	74.00	-26.12	peak
3	10300.000	35.10	12.78	47.88	74.00	-26.12	peak
4	11070.000	33.66	15.04	48.70	74.00	-25.30	peak
5	13974.000	27.39	22.53	49.92	74.00	-24.08	peak
6	17978.000	23.25	26.88	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

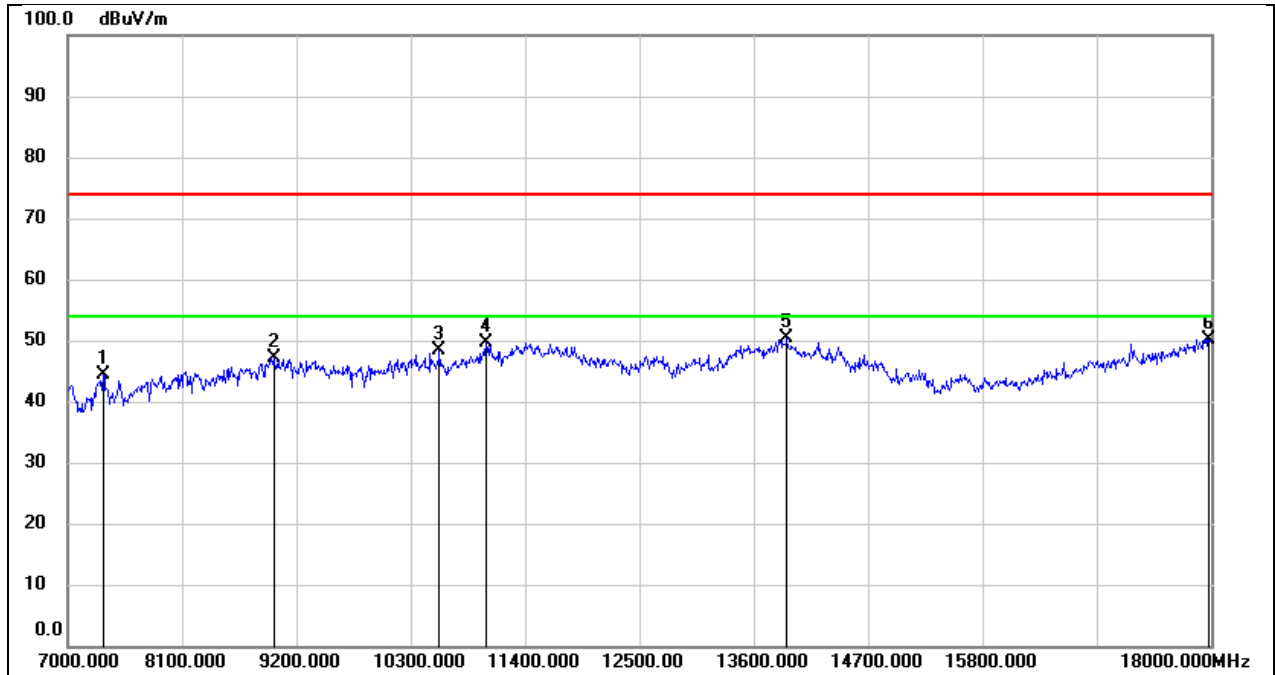


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.31	8.00	44.31	74.00	-29.69	peak
2	8980.000	35.60	11.57	47.17	74.00	-26.83	peak
3	10575.000	34.60	13.70	48.30	74.00	-25.70	peak
4	11026.000	34.63	14.95	49.58	74.00	-24.42	peak
5	13919.000	27.96	22.49	50.45	74.00	-23.55	peak
6	17978.000	23.37	26.88	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

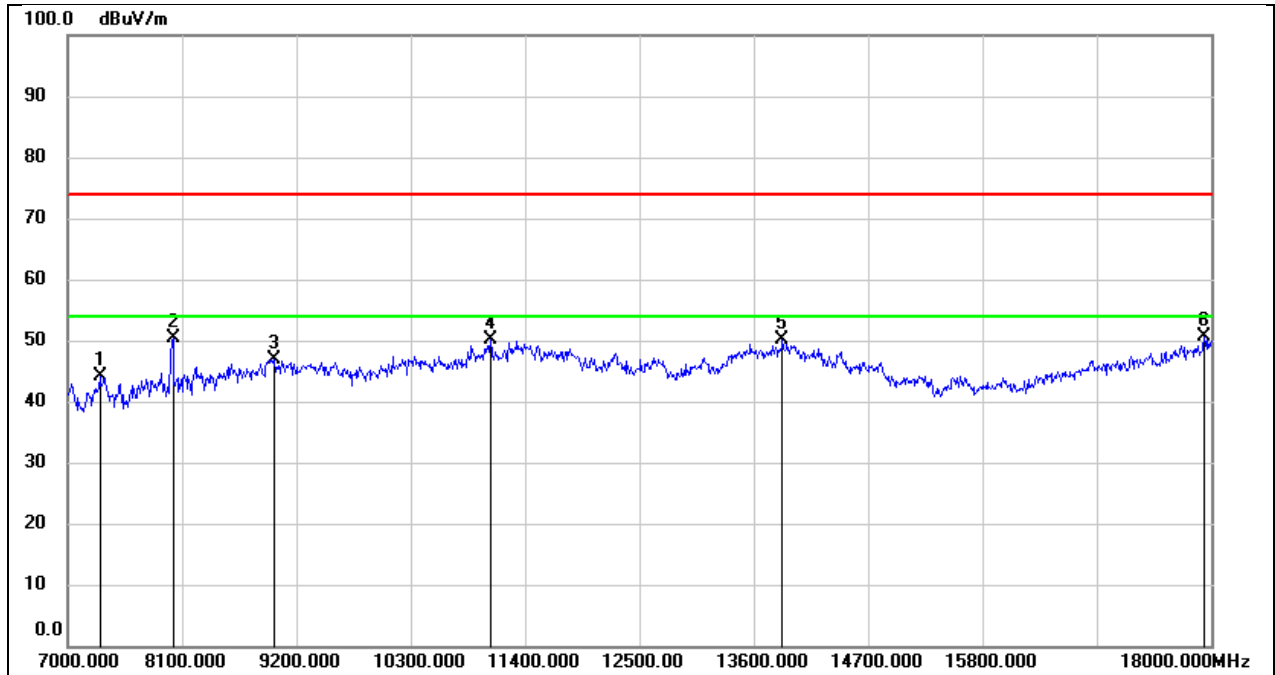


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.40	7.73	44.13	74.00	-29.87	peak
2	8012.000	43.28	6.99	50.27	74.00	-23.73	peak
3	8980.000	35.33	11.57	46.90	74.00	-27.10	peak
4	11070.000	35.10	15.04	50.14	74.00	-23.86	peak
5	13875.000	27.58	22.46	50.04	74.00	-23.96	peak
6	17934.000	23.87	26.69	50.56	74.00	-23.44	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

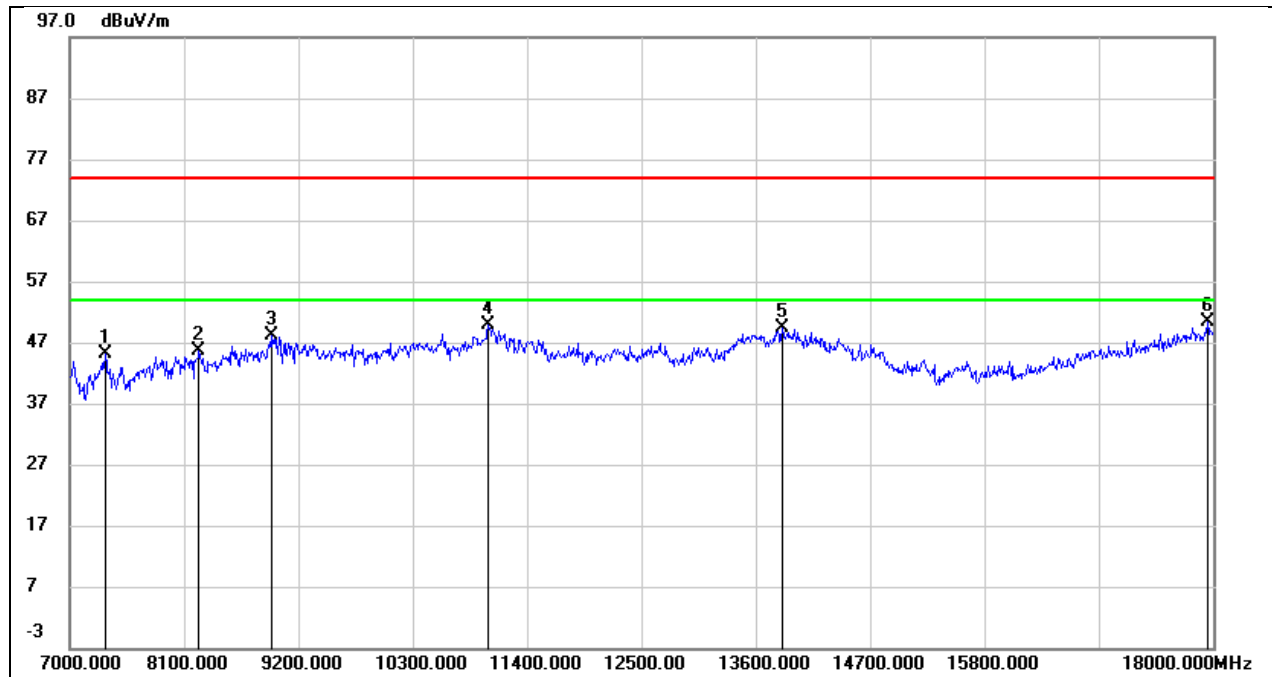


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.02	8.00	45.02	74.00	-28.98	peak
2	8243.000	37.08	8.44	45.52	74.00	-28.48	peak
3	8936.000	37.12	10.91	48.03	74.00	-25.97	peak
4	11026.000	34.93	14.95	49.88	74.00	-24.12	peak
5	13853.000	26.91	22.46	49.37	74.00	-24.63	peak
6	17945.000	23.53	26.74	50.27	74.00	-23.73	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

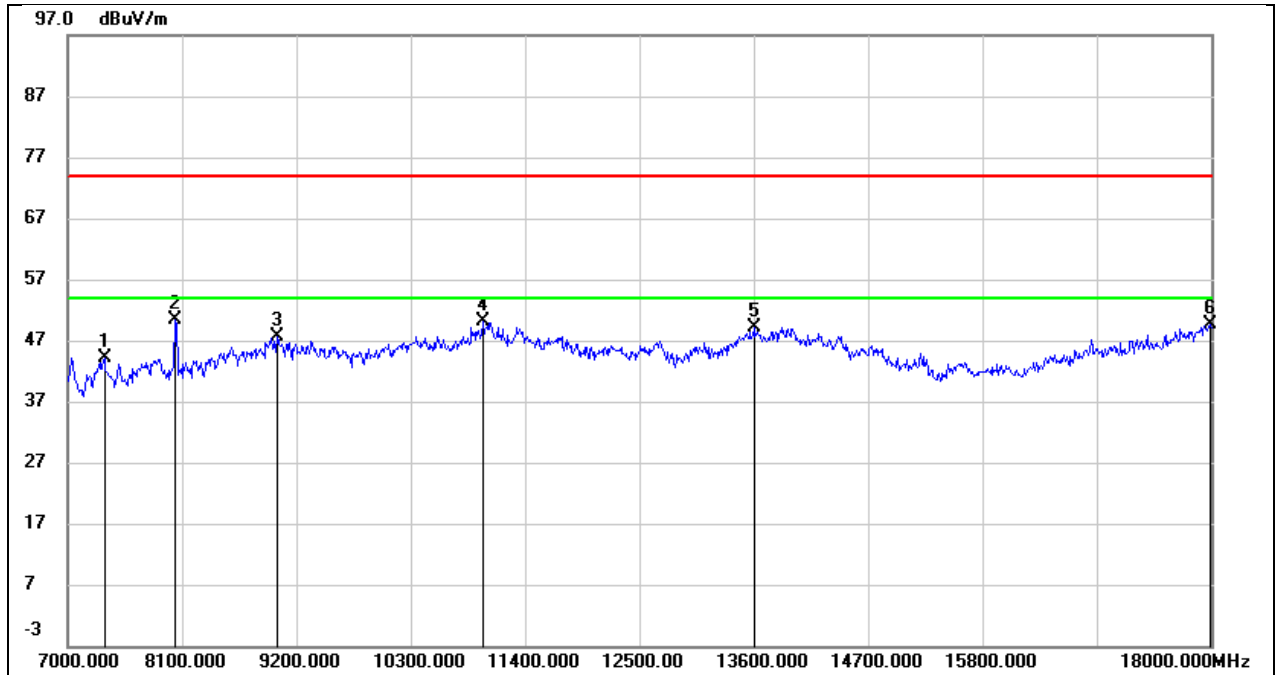


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.02	8.07	44.09	74.00	-29.91	peak
2	8034.000	43.11	7.17	50.28	74.00	-23.72	peak
3	9013.000	35.78	11.75	47.53	74.00	-26.47	peak
4	10993.000	35.27	14.86	50.13	74.00	-23.87	peak
5	13600.000	27.77	21.42	49.19	74.00	-24.81	peak
6	17989.000	22.80	26.92	49.72	74.00	-24.28	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

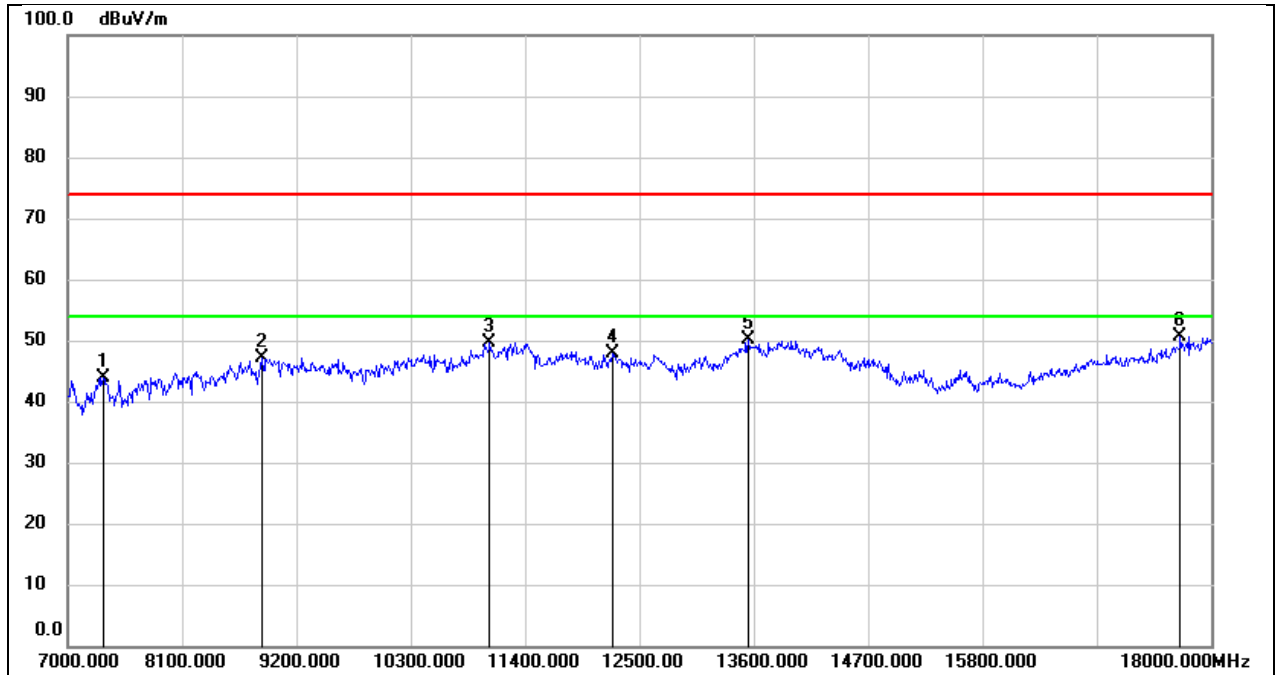


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.83	8.00	43.83	74.00	-30.17	peak
2	8870.000	37.28	9.92	47.20	74.00	-26.80	peak
3	11059.000	34.68	15.02	49.70	74.00	-24.30	peak
4	12236.000	29.15	18.66	47.81	74.00	-26.19	peak
5	13545.000	28.82	21.41	50.23	74.00	-23.77	peak
6	17703.000	25.65	25.01	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

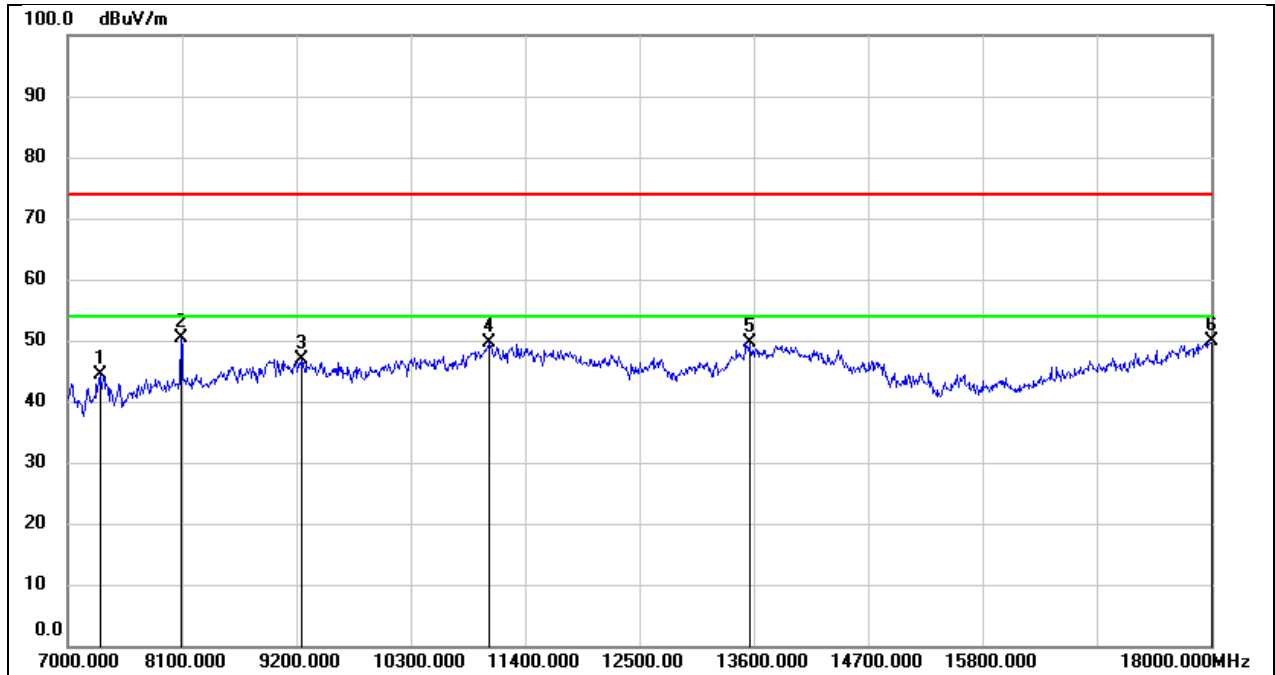


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.67	7.73	44.40	74.00	-29.60	peak
2	8089.000	42.71	7.65	50.36	74.00	-23.64	peak
3	9255.000	36.75	10.22	46.97	74.00	-27.03	peak
4	11059.000	34.53	15.02	49.55	74.00	-24.45	peak
5	13556.000	28.23	21.41	49.64	74.00	-24.36	peak
6	18000.000	22.79	26.97	49.76	74.00	-24.24	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

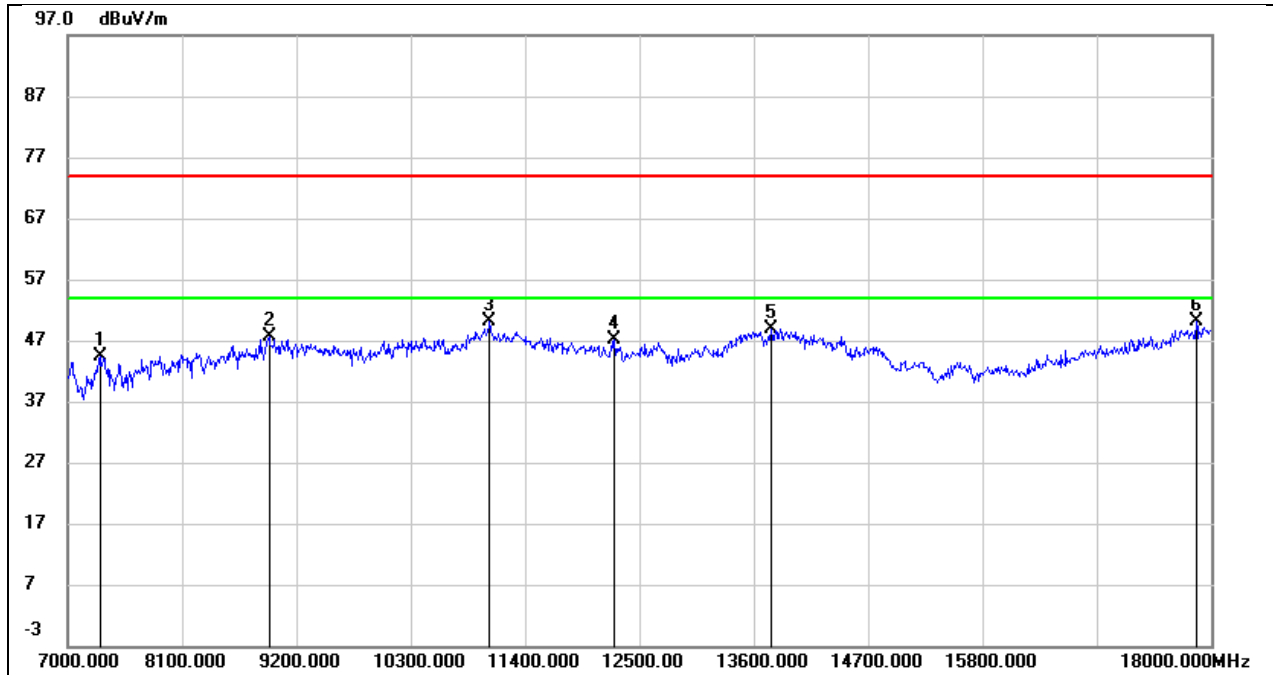


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.61	7.73	44.34	74.00	-29.66	peak
2	8936.000	36.64	10.91	47.55	74.00	-26.45	peak
3	11059.000	34.99	15.02	50.01	74.00	-23.99	peak
4	12258.000	28.45	18.70	47.15	74.00	-26.85	peak
5	13765.000	26.69	22.24	48.93	74.00	-25.07	peak
6	17857.000	23.88	26.36	50.24	74.00	-23.76	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

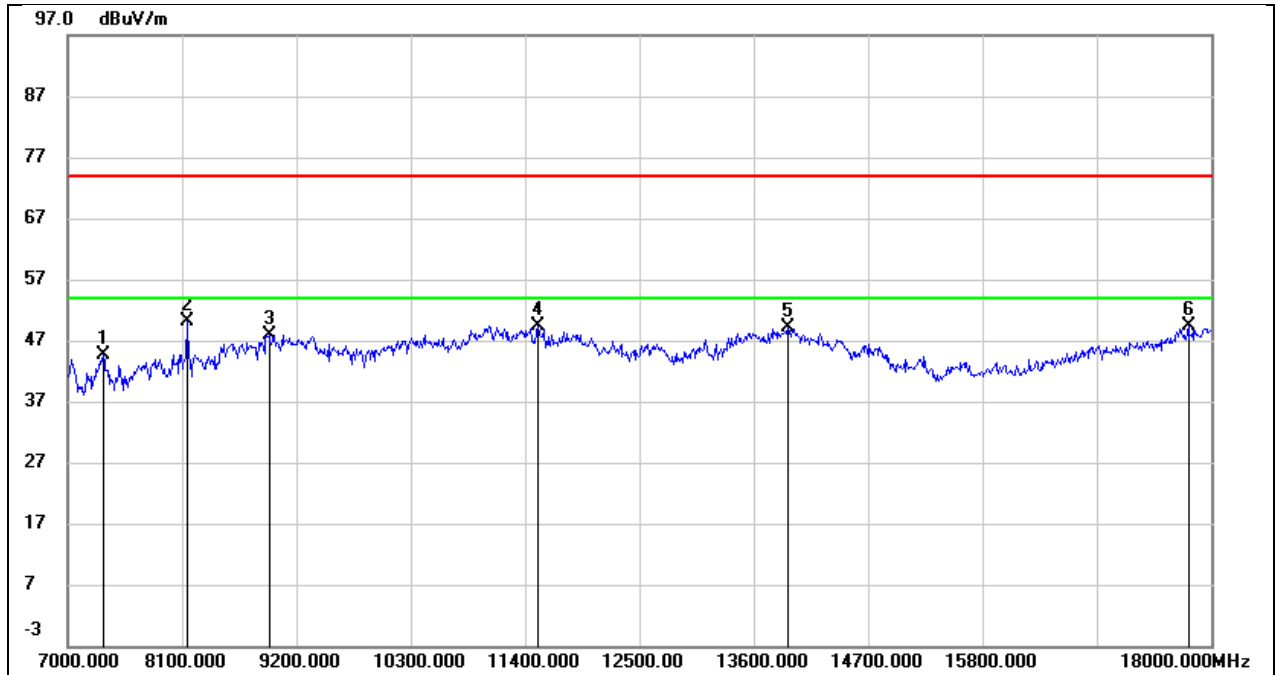


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.52	8.00	44.52	74.00	-29.48	peak
2	8144.000	41.99	8.12	50.11	74.00	-23.89	peak
3	8936.000	36.98	10.91	47.89	74.00	-26.11	peak
4	11521.000	32.55	16.92	49.47	74.00	-24.53	peak
5	13930.000	26.61	22.50	49.11	74.00	-24.89	peak
6	17780.000	23.56	25.89	49.45	74.00	-24.55	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

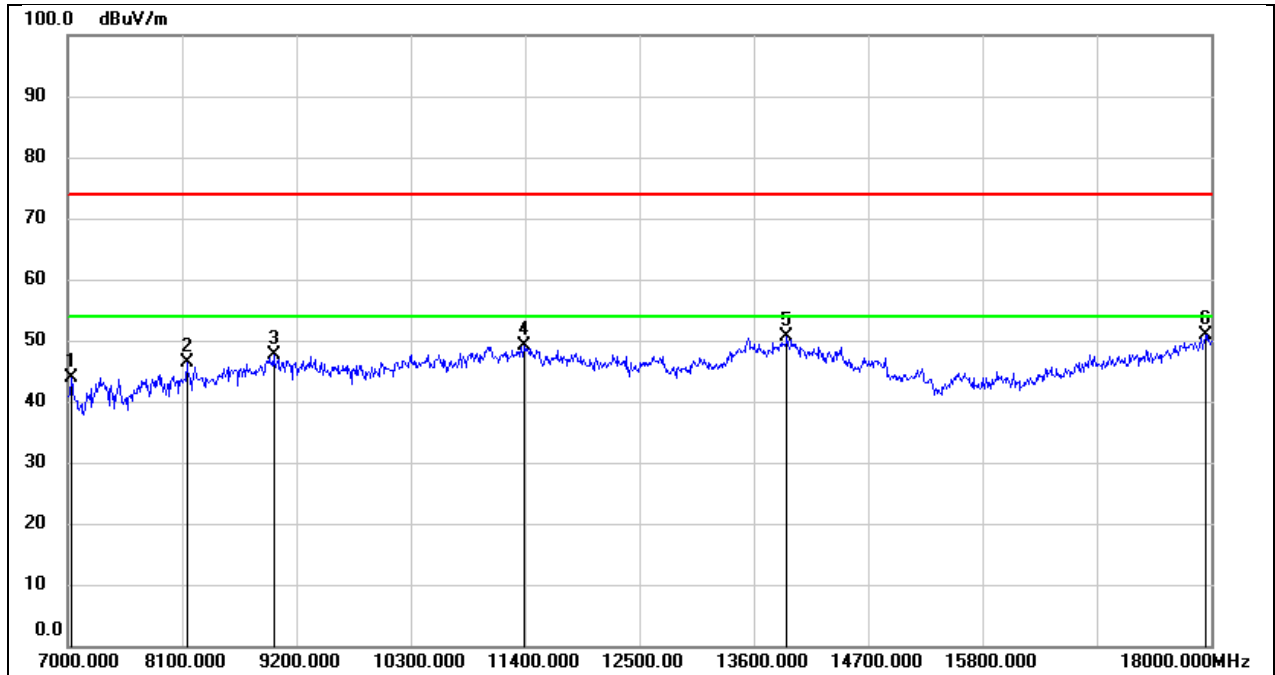


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7033.000	36.35	7.58	43.93	74.00	-30.07	peak
2	8144.000	38.32	8.12	46.44	74.00	-27.56	peak
3	8980.000	35.95	11.57	47.52	74.00	-26.48	peak
4	11389.000	32.65	16.51	49.16	74.00	-24.84	peak
5	13919.000	28.13	22.49	50.62	74.00	-23.38	peak
6	17945.000	24.21	26.74	50.95	74.00	-23.05	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

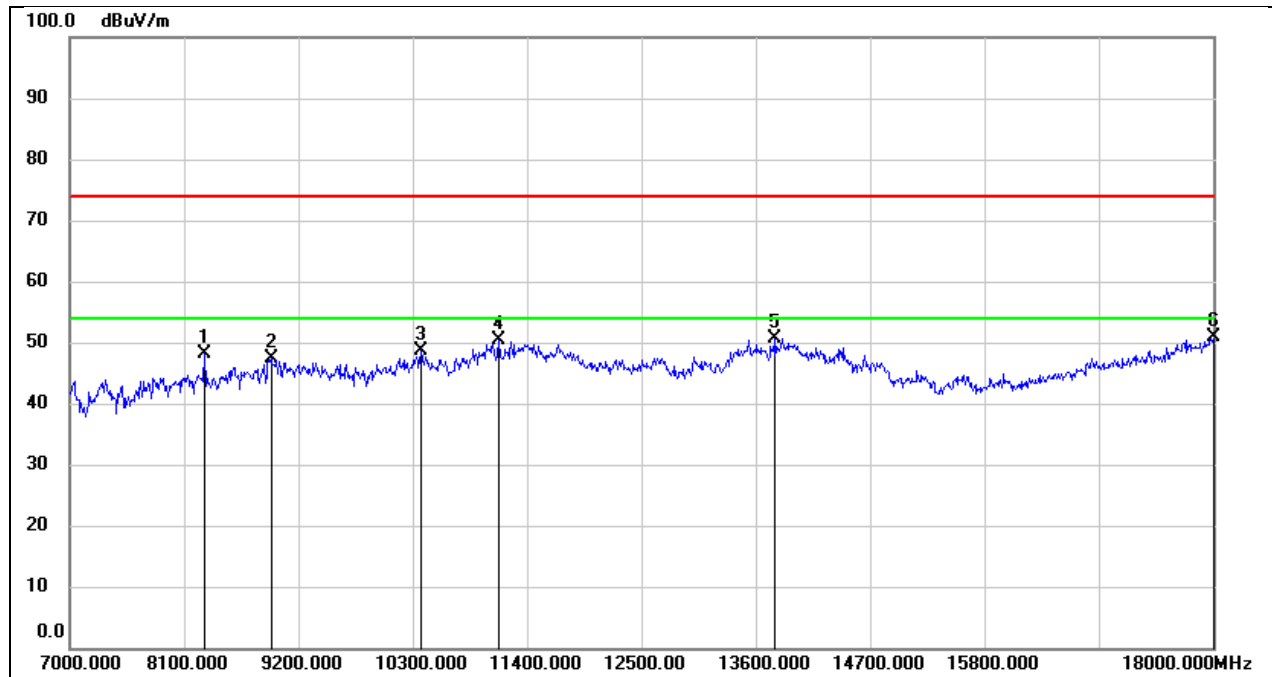


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8298.000	39.79	8.23	48.02	74.00	-25.98	peak
2	8936.000	36.36	10.91	47.27	74.00	-26.73	peak
3	10377.000	35.54	13.13	48.67	74.00	-25.33	peak
4	11125.000	35.32	15.16	50.48	74.00	-23.52	peak
5	13787.000	28.35	22.36	50.71	74.00	-23.29	peak
6	18000.000	24.00	26.97	50.97	74.00	-23.03	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

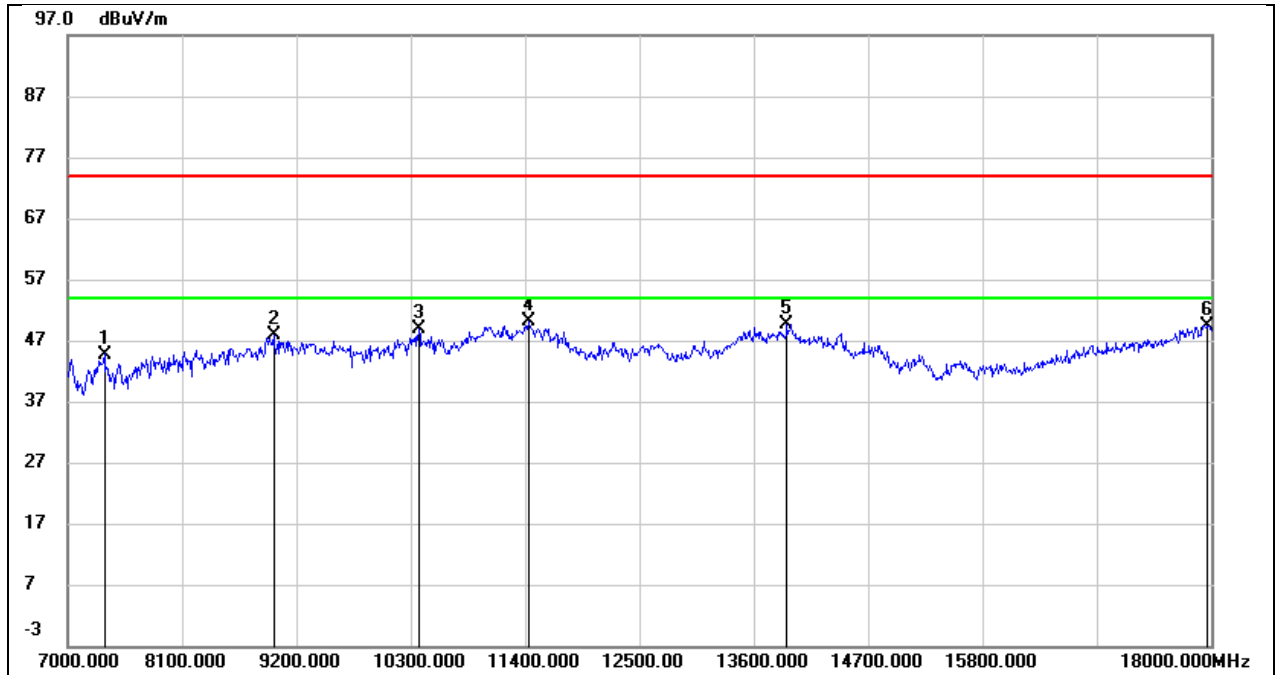


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.68	8.07	44.75	74.00	-29.25	peak
2	8980.000	36.35	11.57	47.92	74.00	-26.08	peak
3	10377.000	35.84	13.13	48.97	74.00	-25.03	peak
4	11433.000	33.52	16.68	50.20	74.00	-23.80	peak
5	13919.000	27.16	22.49	49.65	74.00	-24.35	peak
6	17967.000	22.62	26.83	49.45	74.00	-24.55	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

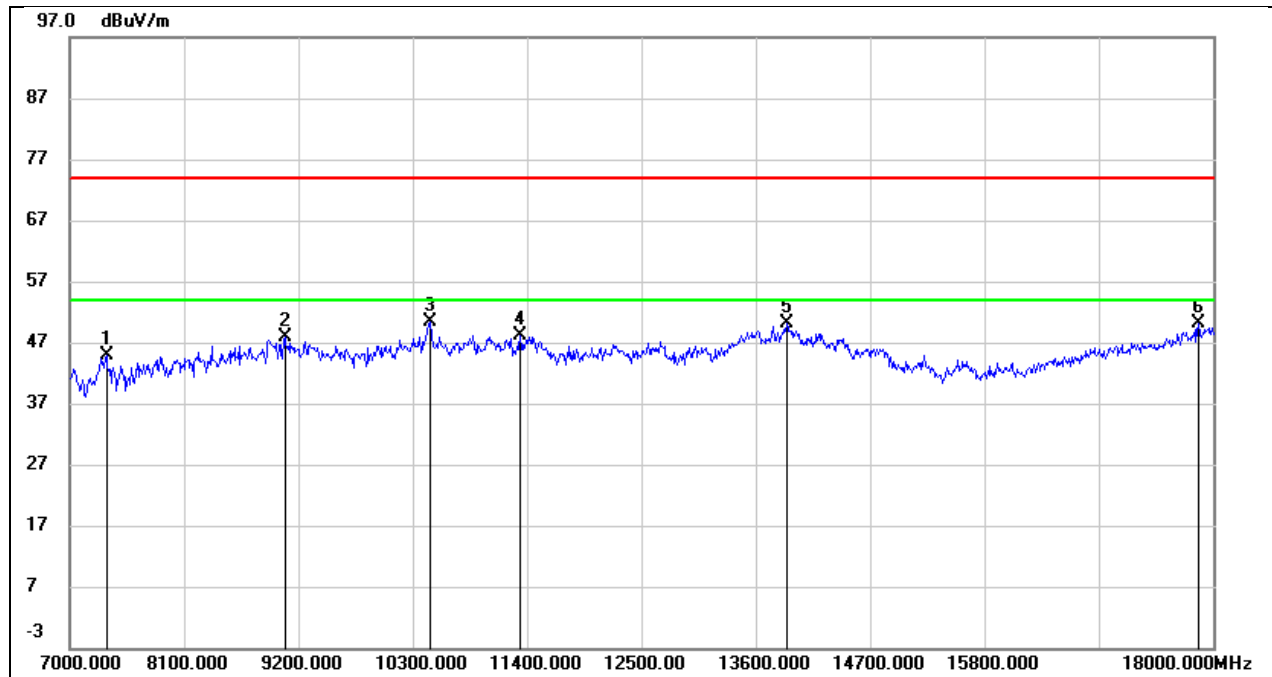


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	36.92	8.07	44.99	74.00	-29.01	peak
2	9068.000	36.66	11.25	47.91	74.00	-26.09	peak
3	10465.000	37.08	13.41	50.49	74.00	-23.51	peak
4	11334.000	32.06	16.16	48.22	74.00	-25.78	peak
5	13897.000	27.59	22.47	50.06	74.00	-23.94	peak
6	17857.000	23.70	26.36	50.06	74.00	-23.94	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

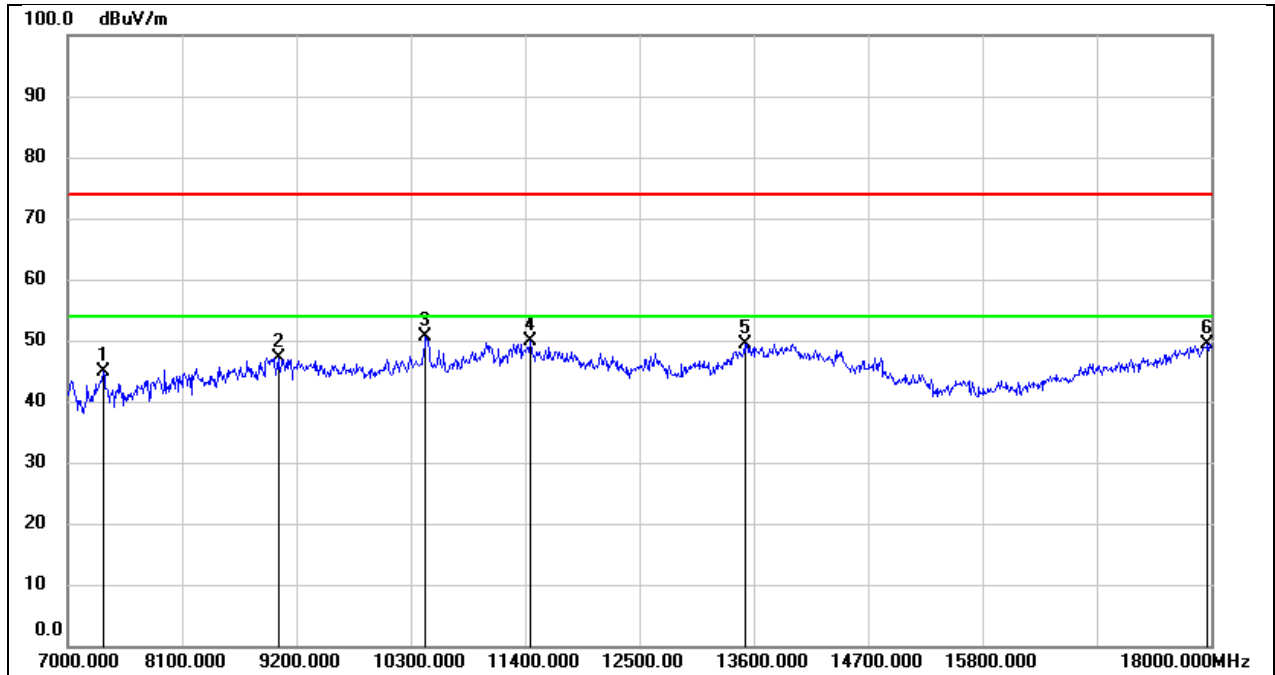


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.80	8.00	44.80	74.00	-29.20	peak
2	9024.000	35.60	11.65	47.25	74.00	-26.75	peak
3	10443.000	37.31	13.35	50.66	74.00	-23.34	peak
4	11455.000	33.14	16.74	49.88	74.00	-24.12	peak
5	13512.000	28.06	21.41	49.47	74.00	-24.53	peak
6	17967.000	22.66	26.83	49.49	74.00	-24.51	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

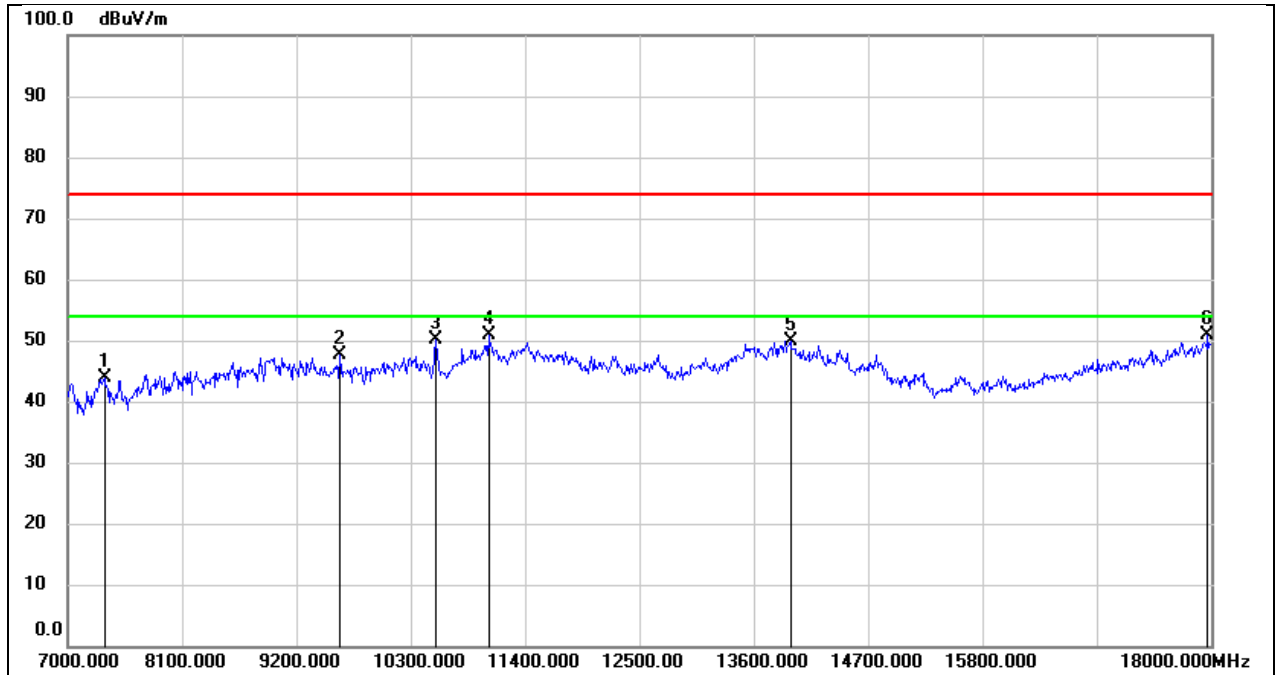


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.70	8.07	43.77	74.00	-30.23	peak
2	9618.000	36.54	11.06	47.60	74.00	-26.40	peak
3	10542.000	36.52	13.62	50.14	74.00	-23.86	peak
4	11048.000	35.86	14.99	50.85	74.00	-23.15	peak
5	13952.000	27.27	22.51	49.78	74.00	-24.22	peak
6	17967.000	24.17	26.83	51.00	74.00	-23.00	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

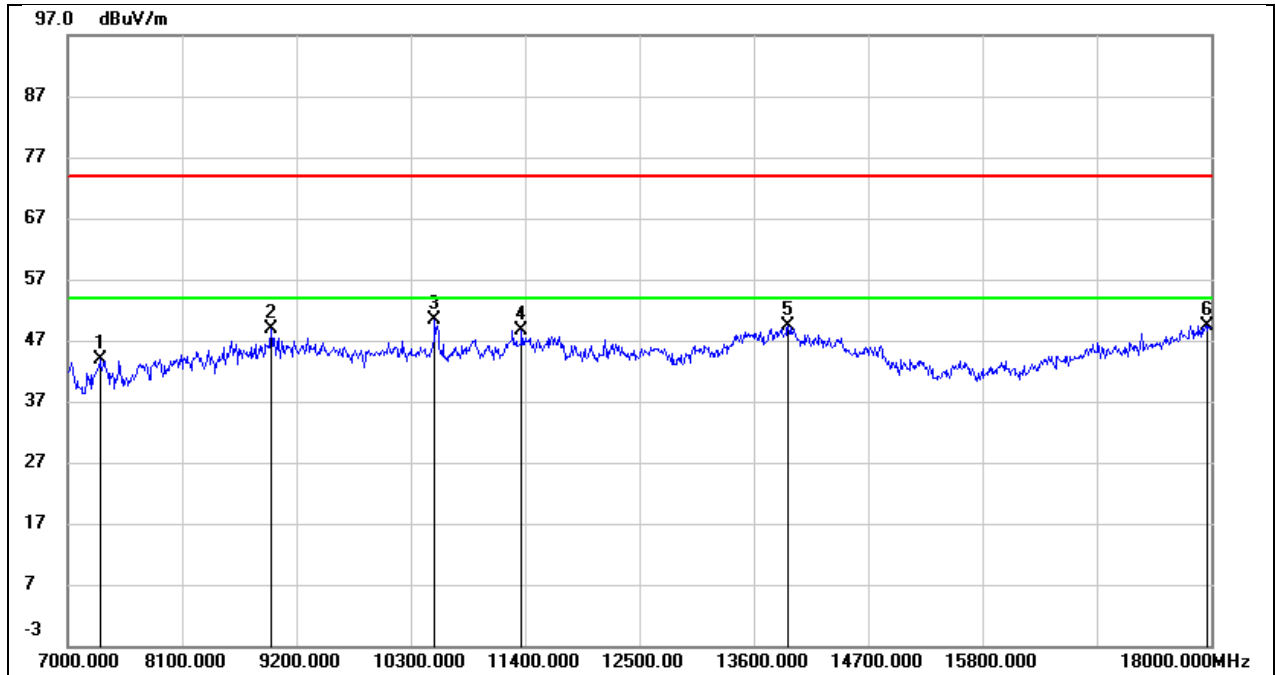


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.03	7.73	43.76	74.00	-30.24	peak
2	8958.000	37.67	11.24	48.91	74.00	-25.09	peak
3	10531.000	36.72	13.58	50.30	74.00	-23.70	peak
4	11367.000	32.37	16.37	48.74	74.00	-25.26	peak
5	13930.000	26.79	22.50	49.29	74.00	-24.71	peak
6	17956.000	22.65	26.78	49.43	74.00	-24.57	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

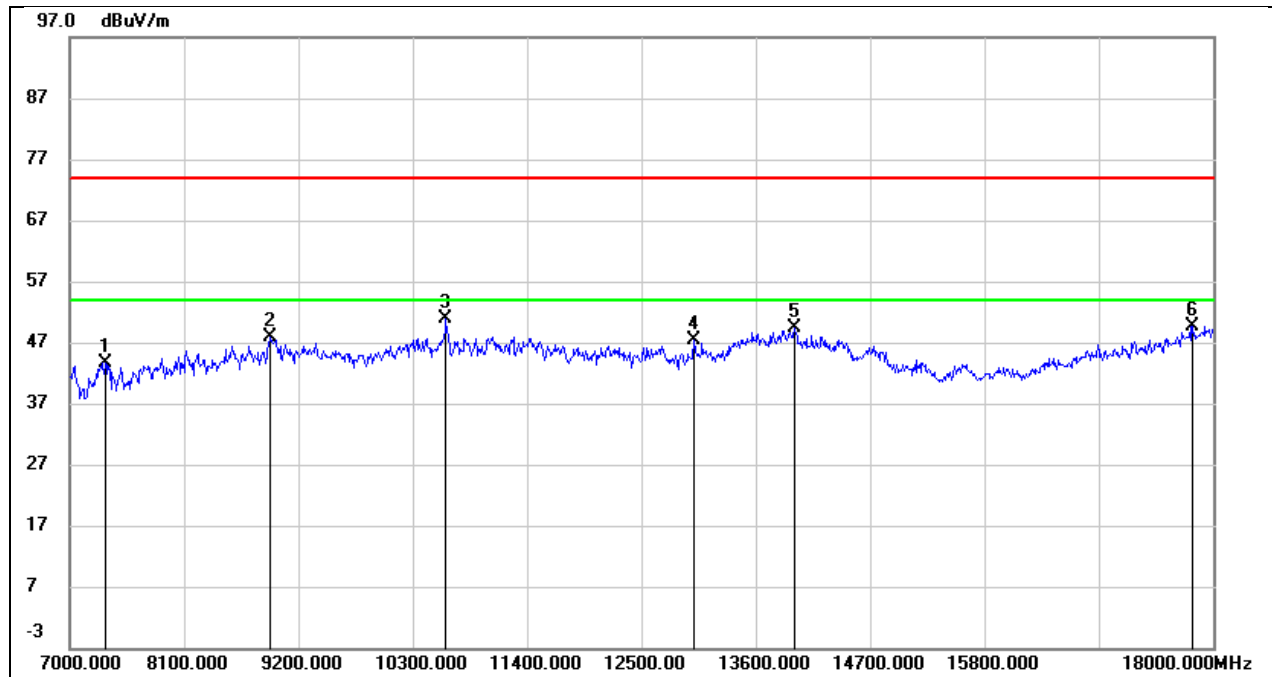


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.65	8.00	43.65	74.00	-30.35	peak
2	8925.000	37.15	10.75	47.90	74.00	-26.10	peak
3	10619.000	37.13	13.78	50.91	74.00	-23.09	peak
4	13006.000	28.15	19.12	47.27	74.00	-26.73	peak
5	13974.000	26.80	22.53	49.33	74.00	-24.67	peak
6	17802.000	23.56	26.13	49.69	74.00	-24.31	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

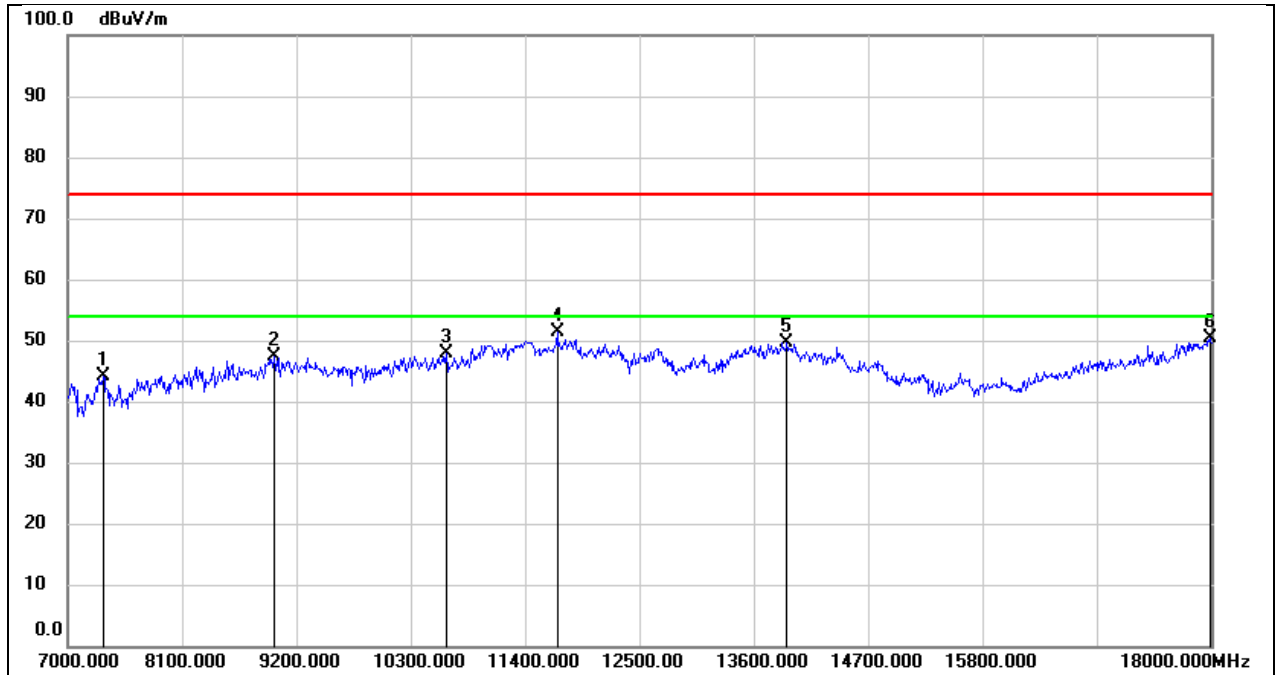


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.18	8.00	44.18	74.00	-29.82	peak
2	8991.000	35.62	11.73	47.35	74.00	-26.65	peak
3	10641.000	34.16	13.79	47.95	74.00	-26.05	peak
4	11708.000	34.19	17.31	51.50	74.00	-22.50	peak
5	13919.000	27.17	22.49	49.66	74.00	-24.34	peak
6	17989.000	23.51	26.92	50.43	74.00	-23.57	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

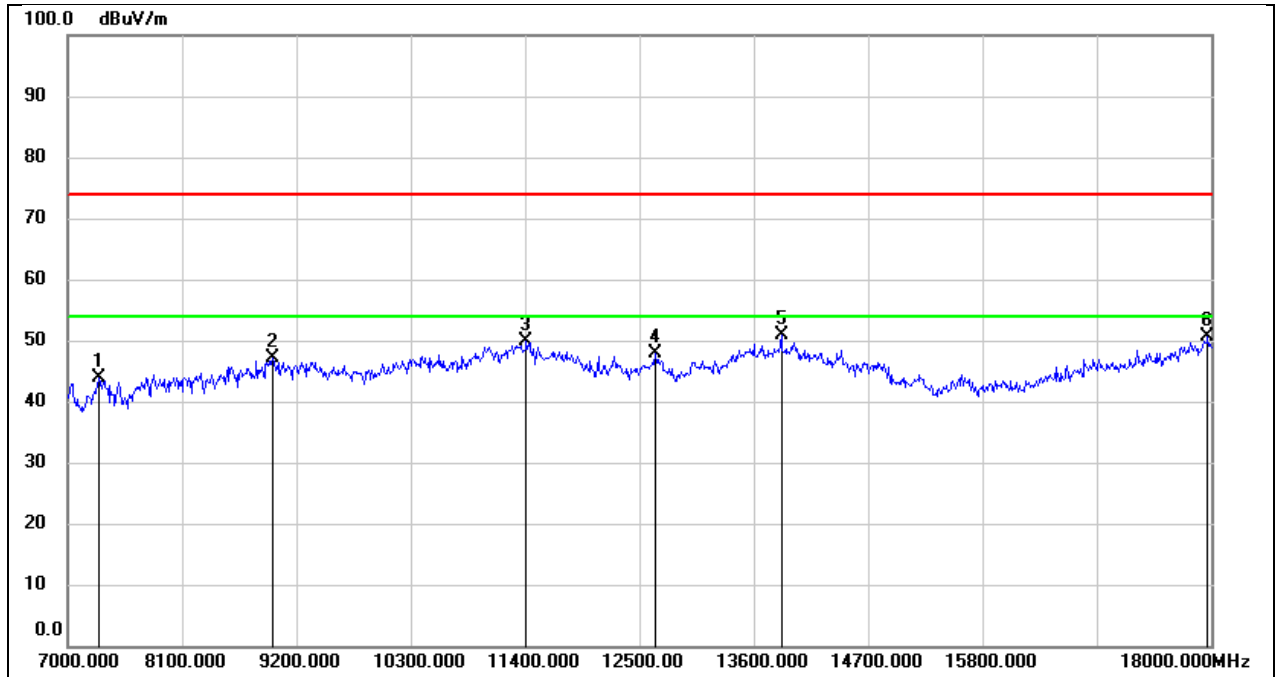


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	36.16	7.65	43.81	74.00	-30.19	peak
2	8969.000	35.71	11.40	47.11	74.00	-26.89	peak
3	11411.000	33.35	16.60	49.95	74.00	-24.05	peak
4	12654.000	29.48	18.44	47.92	74.00	-26.08	peak
5	13864.000	28.52	22.45	50.97	74.00	-23.03	peak
6	17967.000	23.69	26.83	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

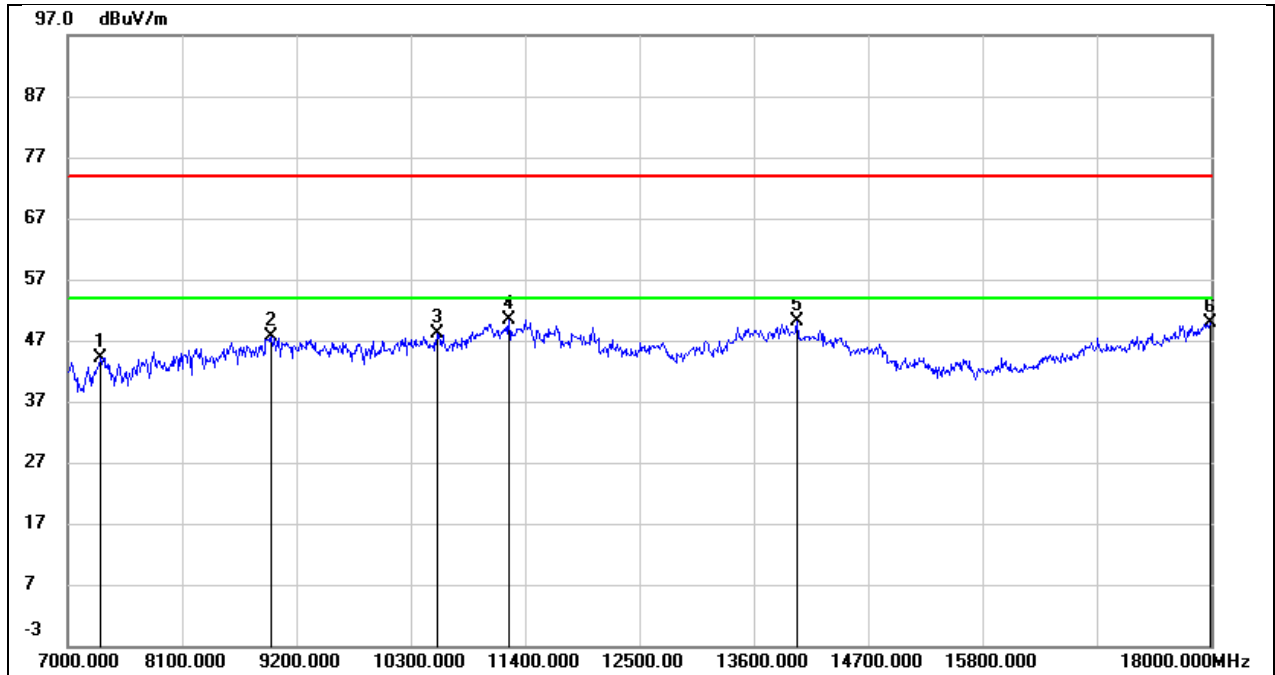


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.34	7.82	44.16	74.00	-29.84	peak
2	8958.000	36.50	11.24	47.74	74.00	-26.26	peak
3	10553.000	34.54	13.64	48.18	74.00	-25.82	peak
4	11246.000	34.88	15.62	50.50	74.00	-23.50	peak
5	14018.000	27.69	22.49	50.18	74.00	-23.82	peak
6	17989.000	22.96	26.92	49.88	74.00	-24.12	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

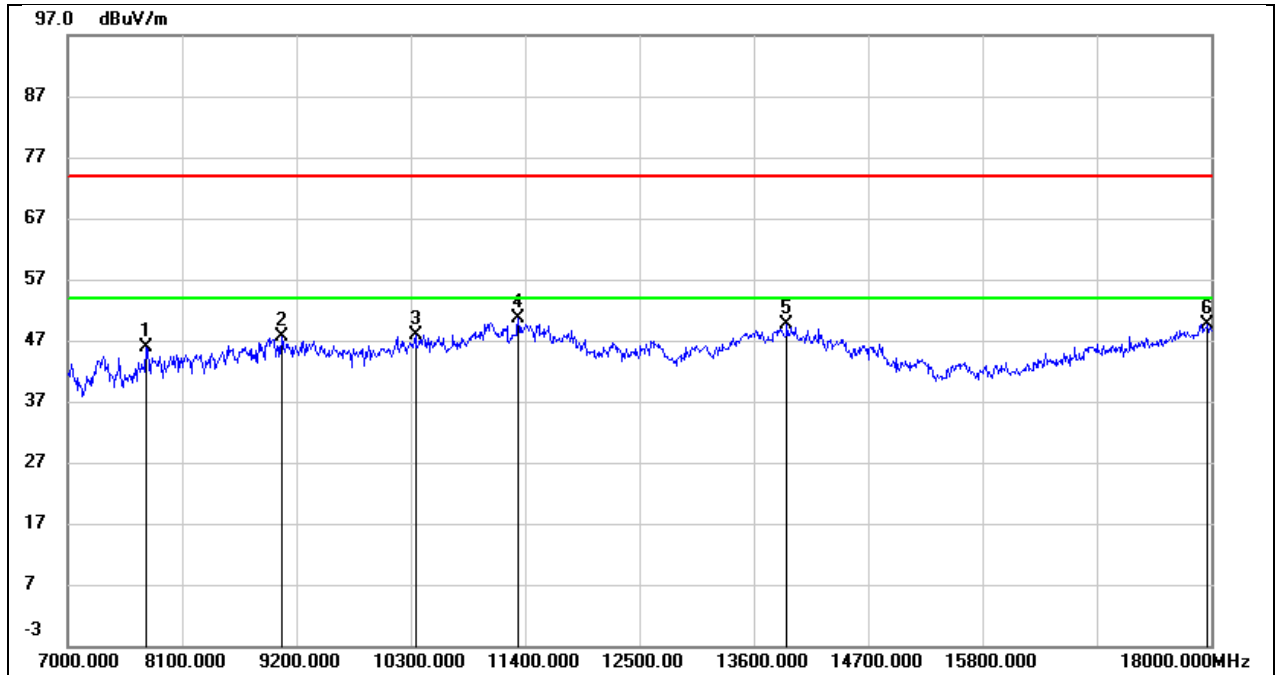


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	39.15	6.79	45.94	74.00	-28.06	peak
2	9057.000	36.22	11.35	47.57	74.00	-26.43	peak
3	10344.000	34.87	12.98	47.85	74.00	-26.15	peak
4	11334.000	34.57	16.16	50.73	74.00	-23.27	peak
5	13919.000	27.19	22.49	49.68	74.00	-24.32	peak
6	17967.000	22.76	26.83	49.59	74.00	-24.41	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

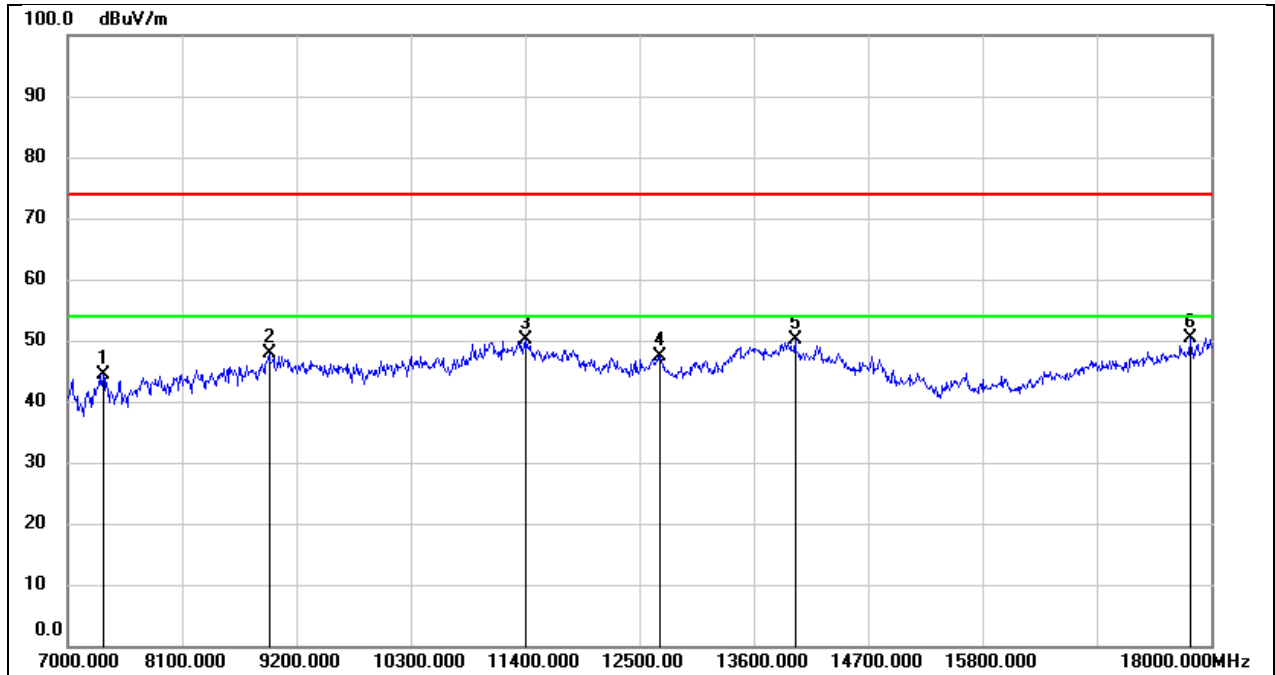


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.50	8.00	44.50	74.00	-29.50	peak
2	8936.000	37.08	10.91	47.99	74.00	-26.01	peak
3	11411.000	33.63	16.60	50.23	74.00	-23.77	peak
4	12698.000	28.80	18.56	47.36	74.00	-26.64	peak
5	13996.000	27.51	22.54	50.05	74.00	-23.95	peak
6	17802.000	24.35	26.13	50.48	74.00	-23.52	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

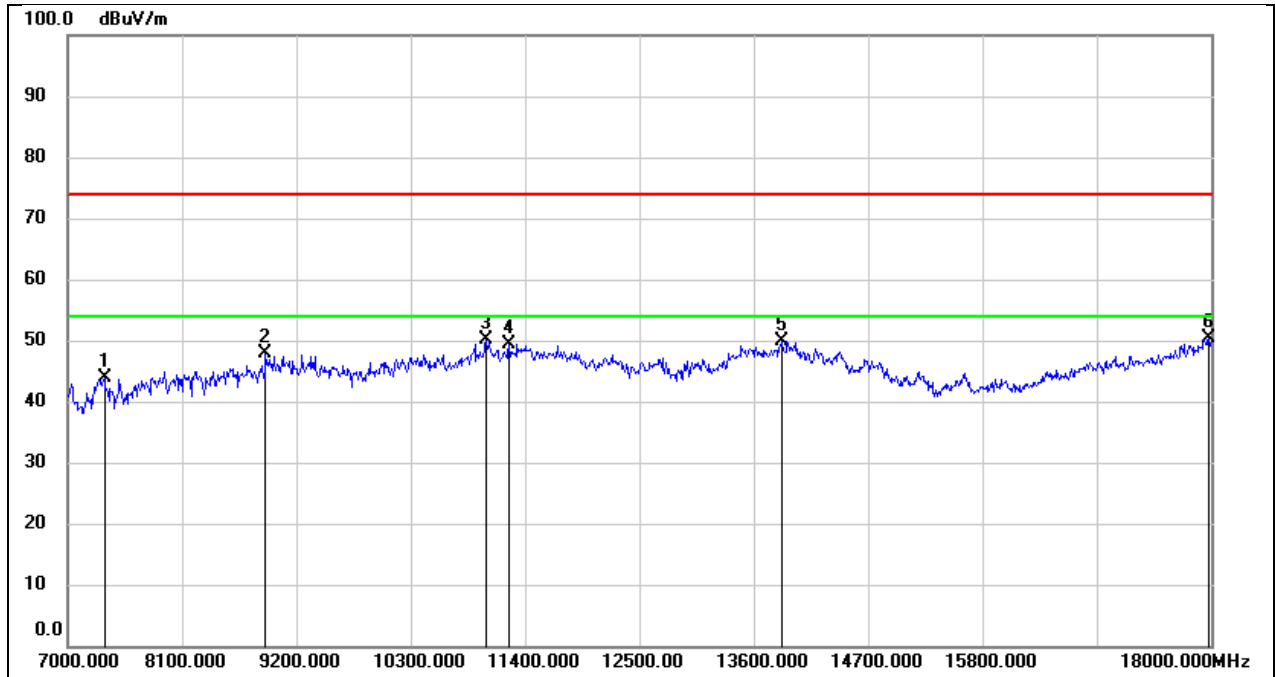


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	35.87	8.07	43.94	74.00	-30.06	peak
2	8903.000	37.42	10.41	47.83	74.00	-26.17	peak
3	11026.000	35.09	14.95	50.04	74.00	-23.96	peak
4	11246.000	33.67	15.62	49.29	74.00	-24.71	peak
5	13875.000	27.53	22.46	49.99	74.00	-24.01	peak
6	17978.000	23.50	26.88	50.38	74.00	-23.62	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

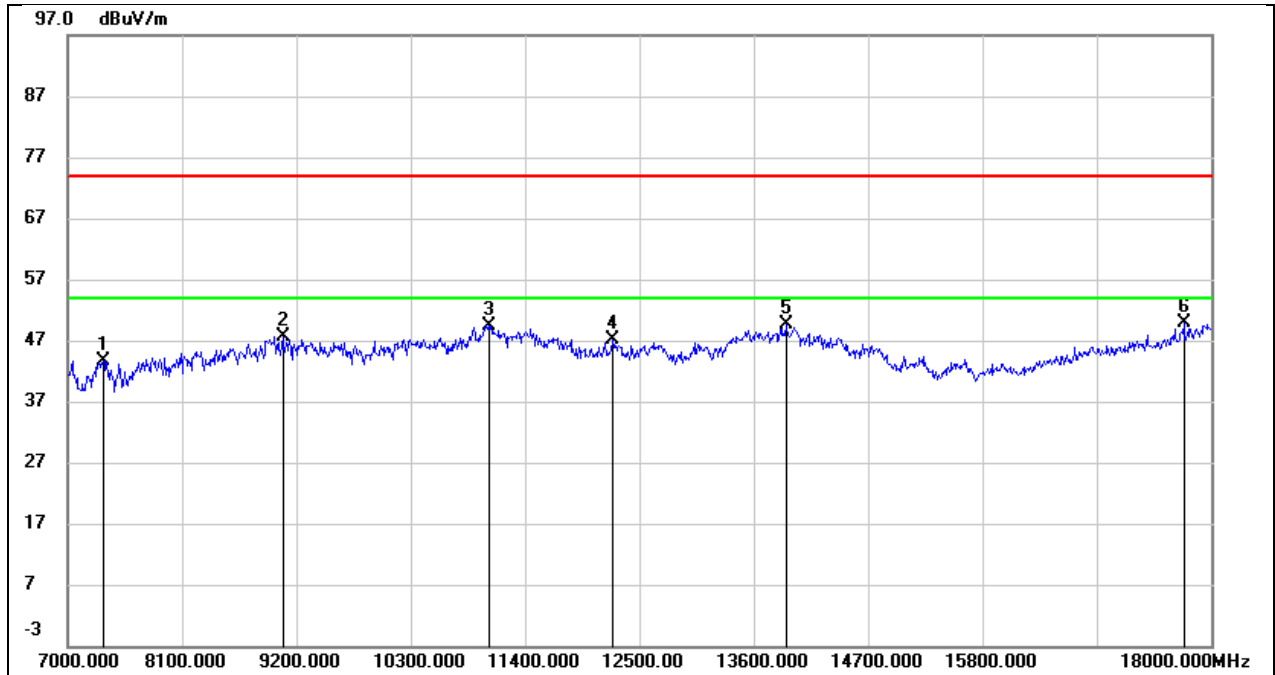


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	35.75	8.00	43.75	74.00	-30.25	peak
2	9068.000	36.41	11.25	47.66	74.00	-26.34	peak
3	11048.000	34.45	14.99	49.44	74.00	-24.56	peak
4	12247.000	28.44	18.68	47.12	74.00	-26.88	peak
5	13908.000	27.04	22.49	49.53	74.00	-24.47	peak
6	17736.000	24.51	25.39	49.90	74.00	-24.10	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

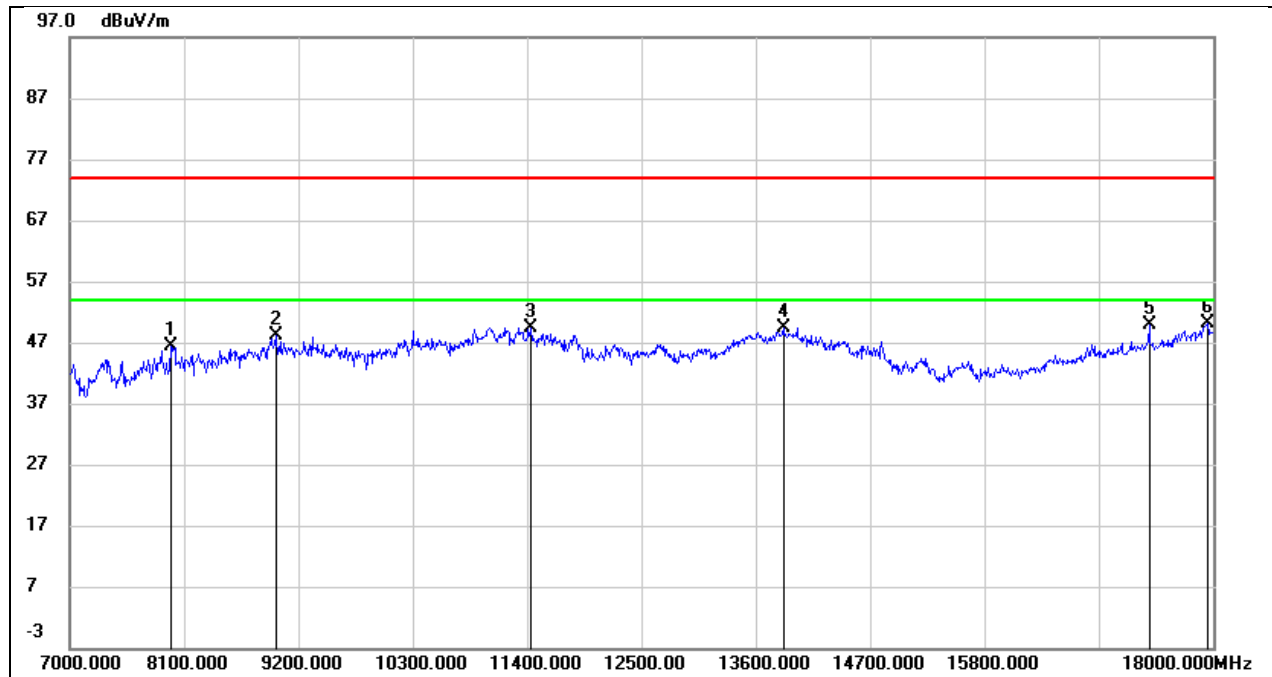


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7968.000	39.40	6.87	46.27	74.00	-27.73	peak
2	8980.000	36.44	11.57	48.01	74.00	-25.99	peak
3	11433.000	32.75	16.68	49.43	74.00	-24.57	peak
4	13864.000	27.02	22.45	49.47	74.00	-24.53	peak
5	17384.000	26.51	23.34	49.85	74.00	-24.15	peak
6	17945.000	23.28	26.74	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

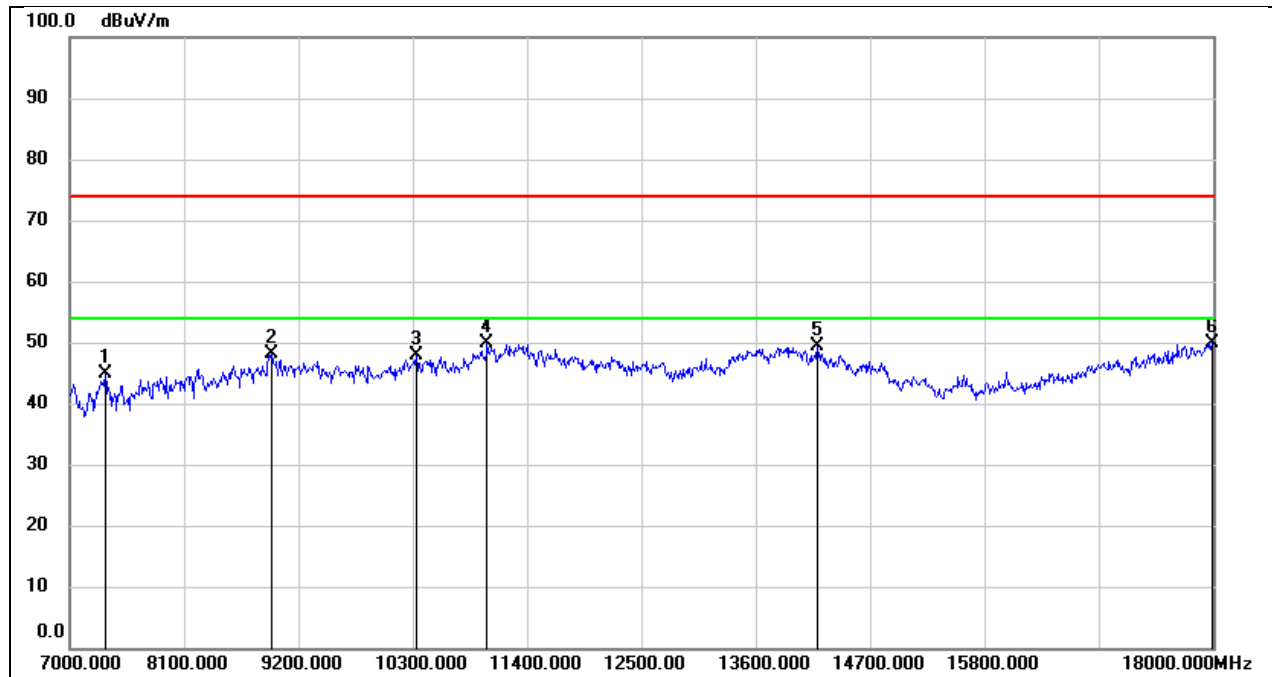


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.76	8.00	44.76	74.00	-29.24	peak
2	8947.000	37.03	11.08	48.11	74.00	-25.89	peak
3	10333.000	34.90	12.93	47.83	74.00	-26.17	peak
4	11015.000	34.87	14.93	49.80	74.00	-24.20	peak
5	14194.000	27.42	21.96	49.38	74.00	-24.62	peak
6	17989.000	23.03	26.92	49.95	74.00	-24.05	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

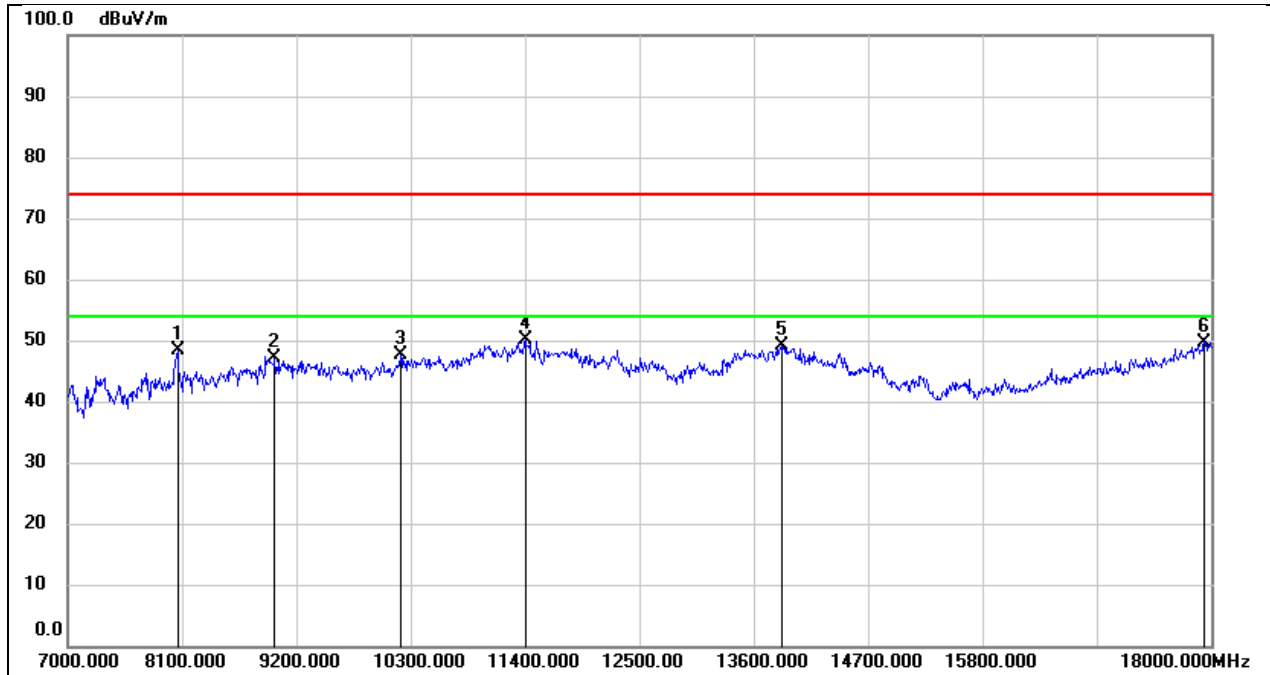


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8056.000	40.94	7.37	48.31	74.00	-25.69	peak
2	8991.000	35.33	11.73	47.06	74.00	-26.94	peak
3	10201.000	35.18	12.34	47.52	74.00	-26.48	peak
4	11400.000	33.55	16.57	50.12	74.00	-23.88	peak
5	13875.000	26.67	22.46	49.13	74.00	-24.87	peak
6	17934.000	23.06	26.69	49.75	74.00	-24.25	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

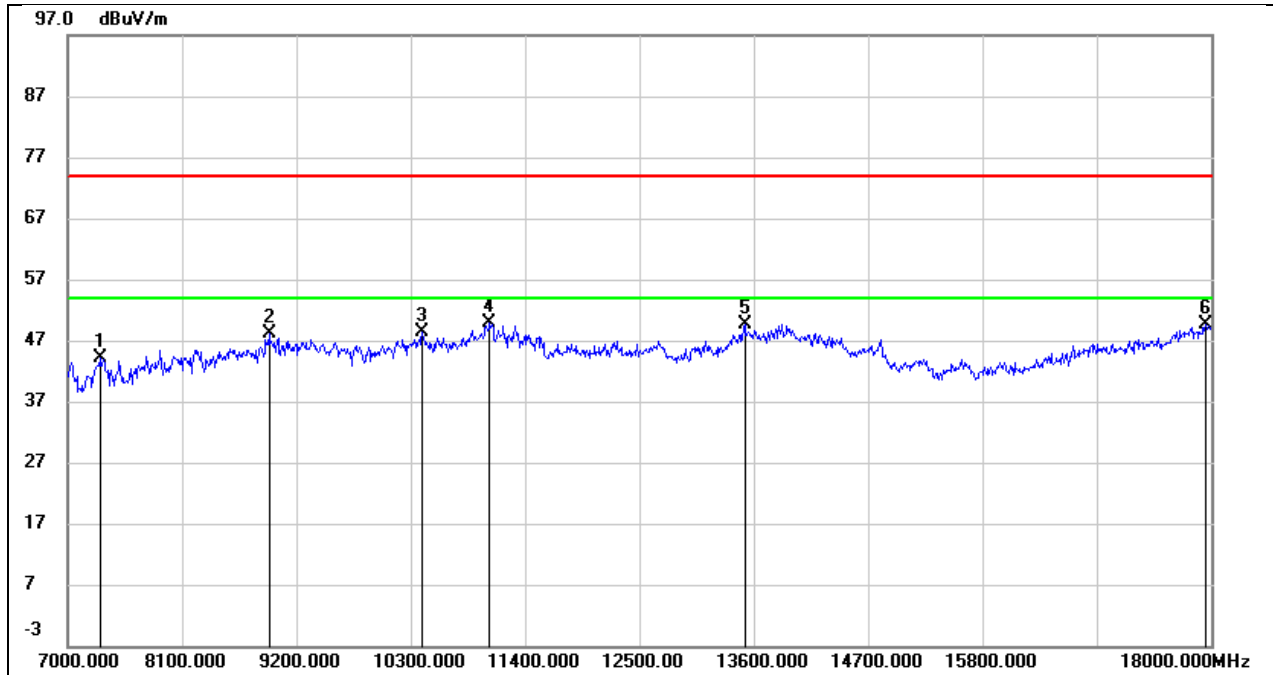


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.30	7.73	44.03	74.00	-29.97	peak
2	8936.000	37.10	10.91	48.01	74.00	-25.99	peak
3	10410.000	35.12	13.25	48.37	74.00	-25.63	peak
4	11059.000	34.91	15.02	49.93	74.00	-24.07	peak
5	13512.000	28.24	21.41	49.65	74.00	-24.35	peak
6	17945.000	22.80	26.74	49.54	74.00	-24.46	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5 V

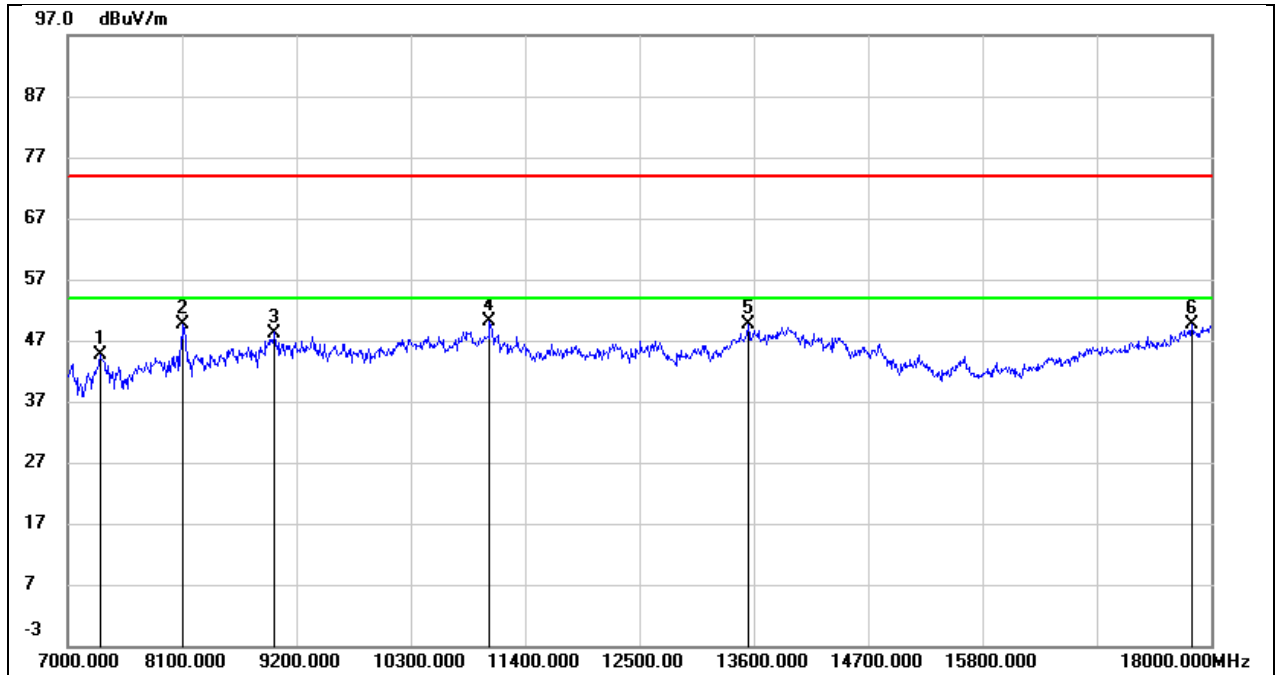

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.98	7.73	44.71	74.00	-29.29	peak
2	8111.000	41.89	7.84	49.73	74.00	-24.27	peak
3	8991.000	36.52	11.73	48.25	74.00	-25.75	peak
4	11059.000	35.07	15.02	50.09	74.00	-23.91	peak
5	13545.000	28.25	21.41	49.66	74.00	-24.34	peak
6	17813.000	23.34	26.18	49.52	74.00	-24.48	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5 V

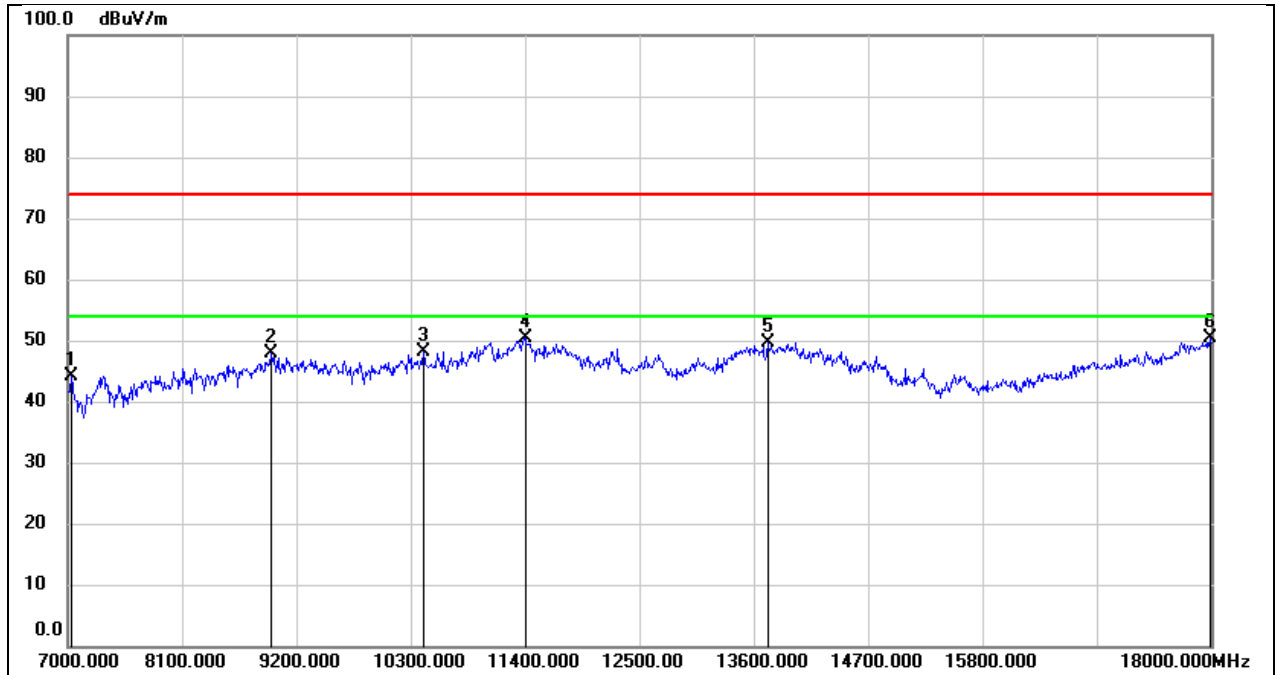

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7033.000	36.50	7.58	44.08	74.00	-29.92	peak
2	8958.000	36.62	11.24	47.86	74.00	-26.14	peak
3	10421.000	34.78	13.29	48.07	74.00	-25.93	peak
4	11400.000	33.88	16.57	50.45	74.00	-23.55	peak
5	13732.000	27.60	22.09	49.69	74.00	-24.31	peak
6	17989.000	23.39	26.92	50.31	74.00	-23.69	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

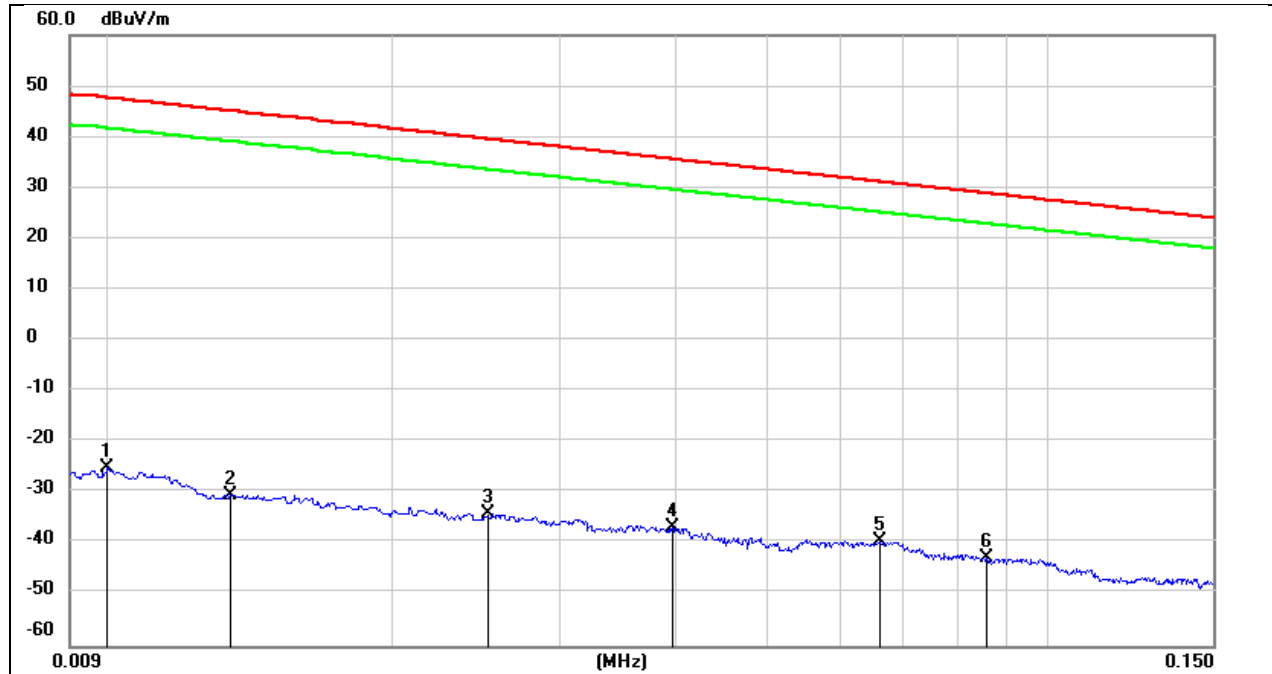


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.22	-101.40	-25.18	47.60	-76.68	-3.90	-72.78	peak
2	0.0134	70.96	-101.39	-30.43	45.06	-81.93	-6.44	-75.49	peak
3	0.0252	67.32	-101.37	-34.05	39.57	-85.55	-11.93	-73.62	peak
4	0.0396	64.61	-101.43	-36.82	35.65	-88.32	-15.85	-72.47	peak
5	0.0661	62.14	-101.55	-39.41	31.20	-90.91	-20.30	-70.61	peak
6	0.0859	58.80	-101.68	-42.88	28.92	-94.38	-22.58	-71.80	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

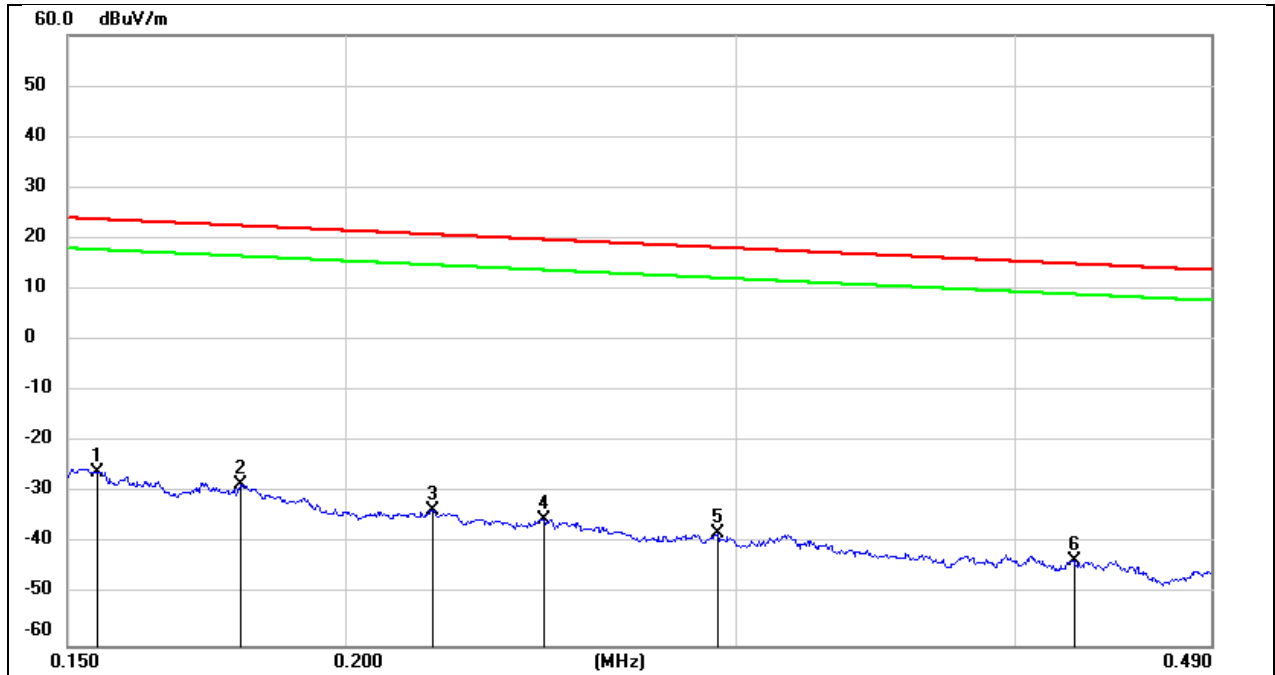

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1547	75.81	-101.65	-25.84	23.81	-77.34	-27.69	-49.65	peak
2	0.1794	73.27	-101.68	-28.41	22.53	-79.91	-28.97	-50.94	peak
3	0.2190	68.27	-101.75	-33.48	20.79	-84.98	-30.71	-54.27	peak
4	0.2459	66.64	-101.80	-35.16	19.79	-86.66	-31.71	-54.95	peak
5	0.2942	63.82	-101.85	-38.03	18.23	-89.53	-33.27	-56.26	peak
6	0.4248	58.59	-101.99	-43.40	15.04	-94.90	-36.46	-58.44	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

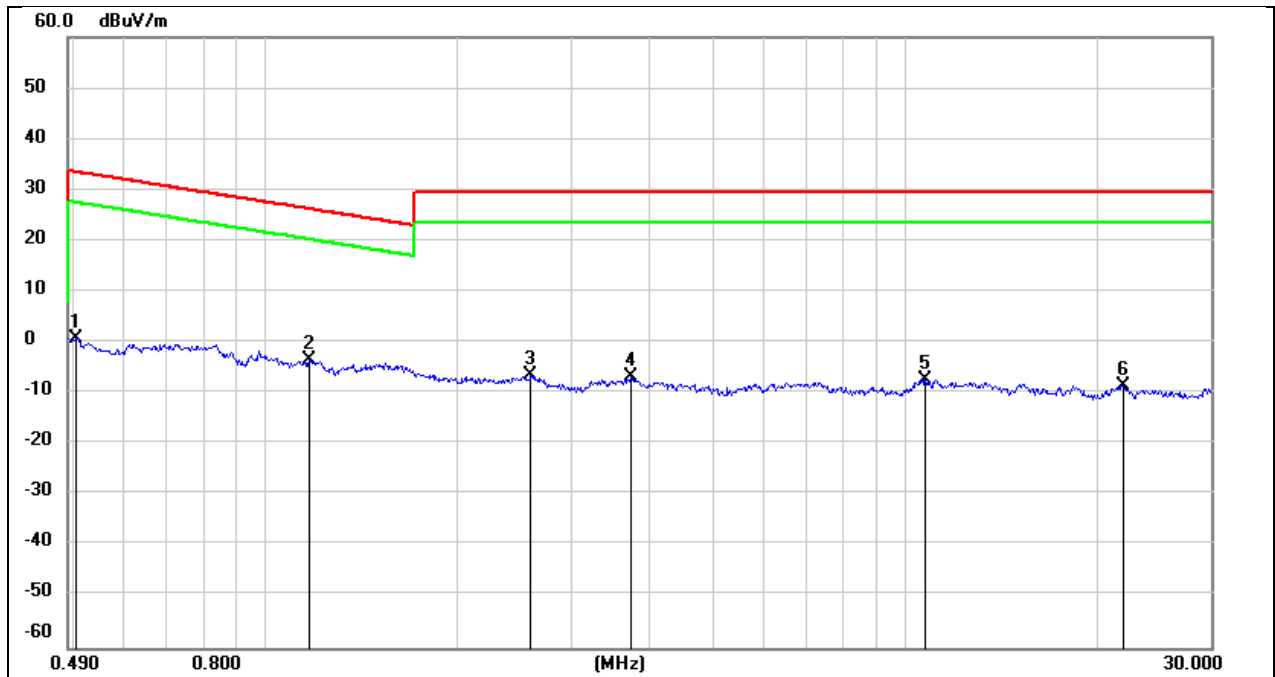

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5039	62.93	-62.07	0.86	33.56	-50.64	-17.94	-32.70	peak
2	1.1687	58.72	-62.19	-3.47	26.25	-54.97	-25.25	-29.72	peak
3	2.5935	55.11	-61.68	-6.57	29.54	-58.07	-21.96	-36.11	peak
4	3.7100	54.70	-61.41	-6.71	29.54	-58.21	-21.96	-36.25	peak
5	10.7299	53.48	-60.83	-7.35	29.54	-58.85	-21.96	-36.89	peak
6	21.9143	52.22	-60.69	-8.47	29.54	-59.97	-21.96	-38.01	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

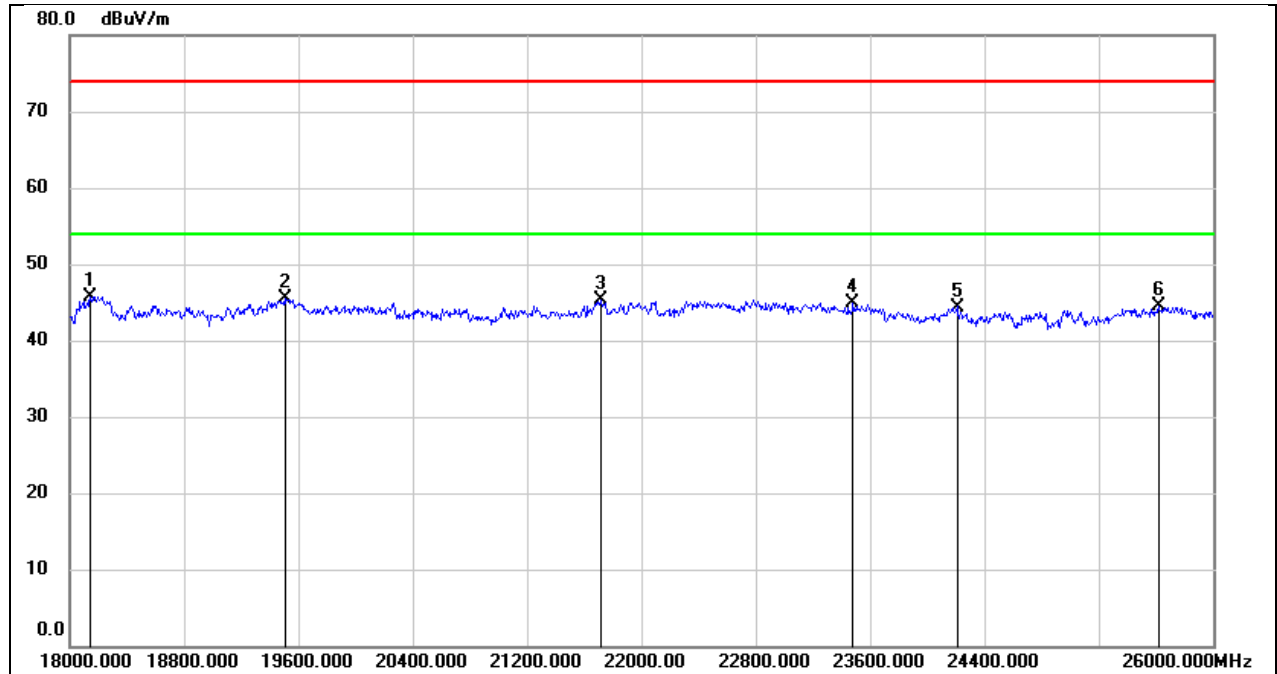

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	51.27	-5.48	45.79	74.00	-28.21	peak
2	19504.000	50.97	-5.54	45.43	74.00	-28.57	peak
3	21720.000	49.61	-4.37	45.24	74.00	-28.76	peak
4	23480.000	48.04	-3.16	44.88	74.00	-29.12	peak
5	24208.000	47.21	-2.81	44.40	74.00	-29.60	peak
6	25616.000	45.68	-1.24	44.44	74.00	-29.56	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

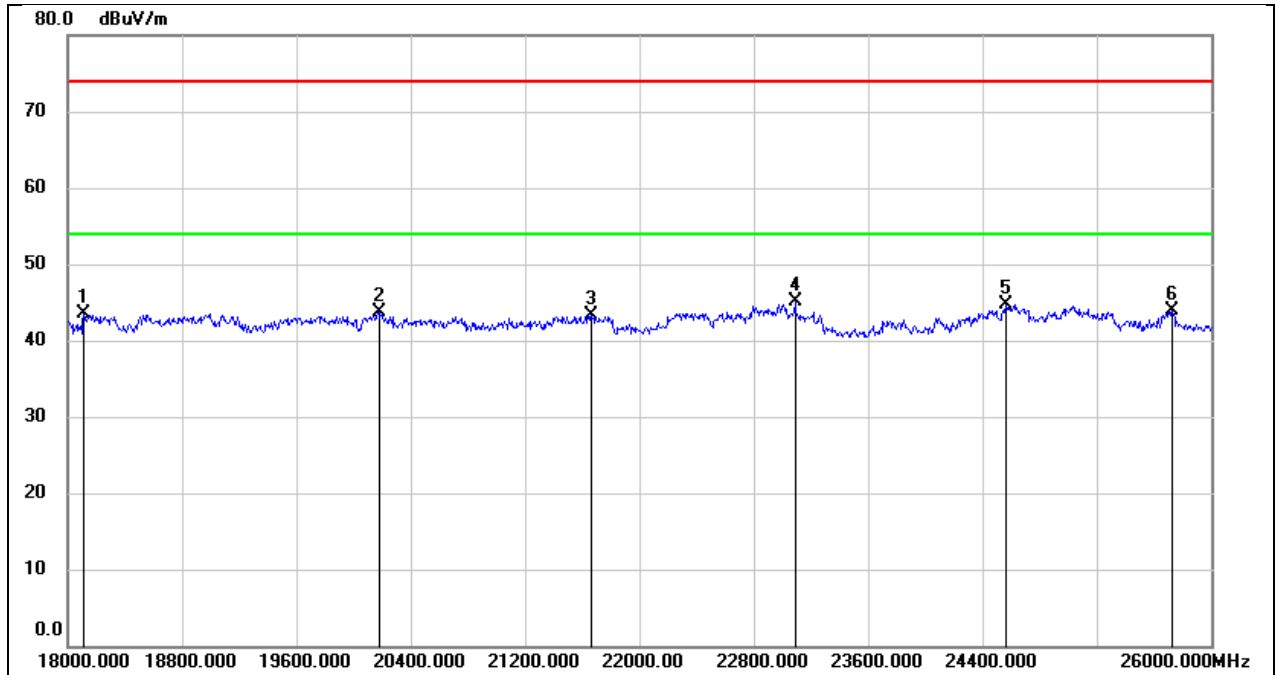

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18112.000	48.96	-5.47	43.49	74.00	-30.51	peak
2	20176.000	49.21	-5.56	43.65	74.00	-30.35	peak
3	21664.000	47.73	-4.45	43.28	74.00	-30.72	peak
4	23088.000	48.52	-3.41	45.11	74.00	-28.89	peak
5	24568.000	47.10	-2.33	44.77	74.00	-29.23	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

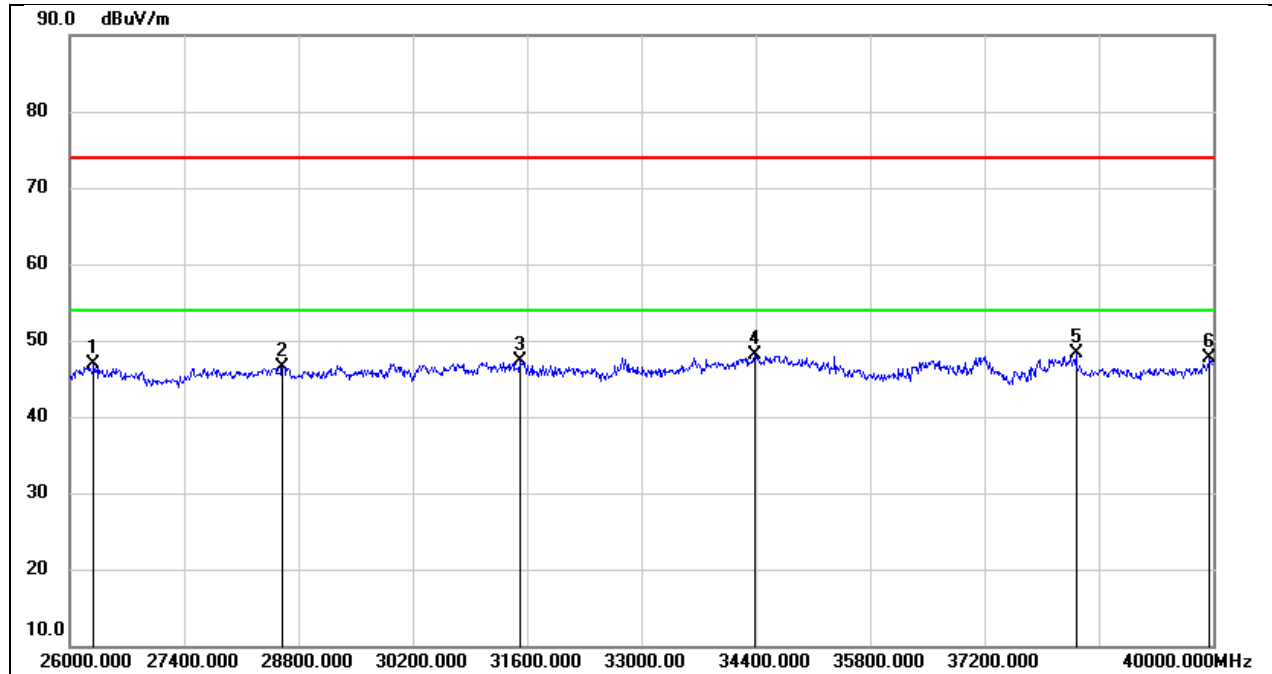

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26294.000	52.19	-5.25	46.94	74.00	-27.06	peak
2	28604.000	48.30	-1.80	46.50	74.00	-27.50	peak
3	31516.000	48.56	-1.19	47.37	74.00	-26.63	peak
4	34386.000	47.05	1.03	48.08	74.00	-25.92	peak
5	38320.000	44.56	3.77	48.33	74.00	-25.67	peak
6	39958.000	42.58	5.12	47.70	74.00	-26.30	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

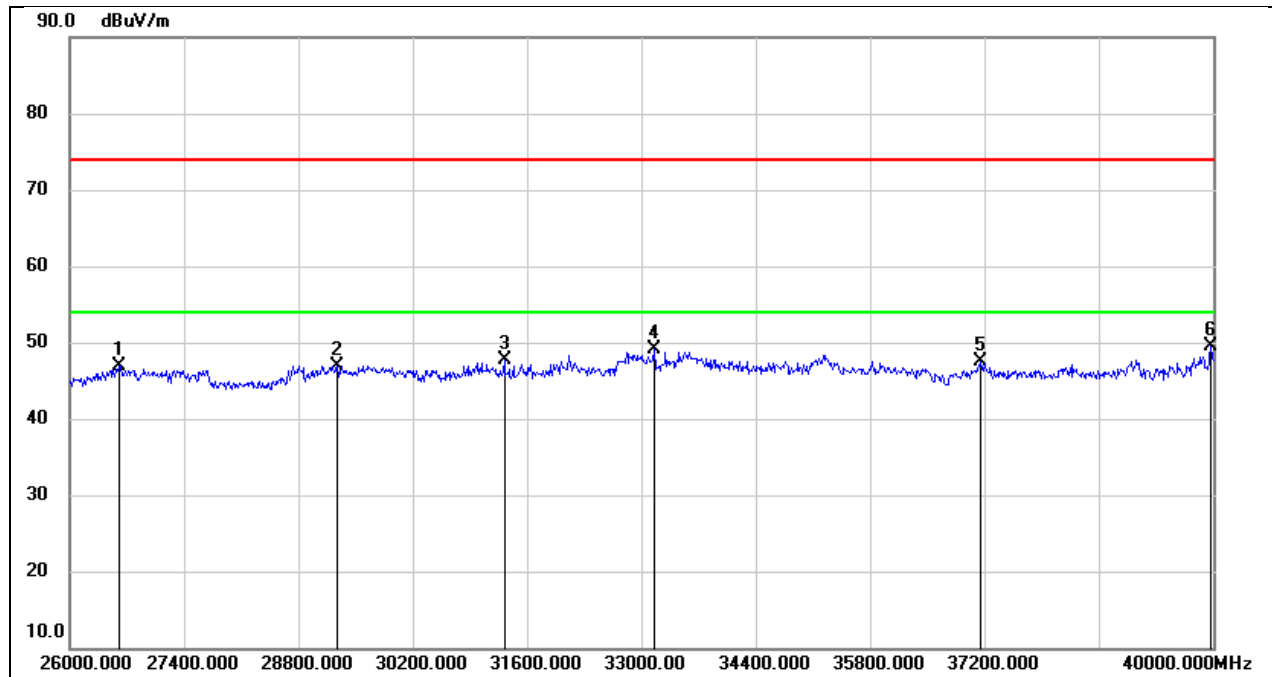

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26602.000	51.78	-4.80	46.98	74.00	-27.02	peak
2	29276.000	48.01	-1.01	47.00	74.00	-27.00	peak
3	31320.000	48.61	-0.93	47.68	74.00	-26.32	peak
4	33154.000	49.55	-0.54	49.01	74.00	-24.99	peak
5	37158.000	44.34	3.17	47.51	74.00	-26.49	peak
6	39972.000	44.45	5.13	49.58	74.00	-24.42	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

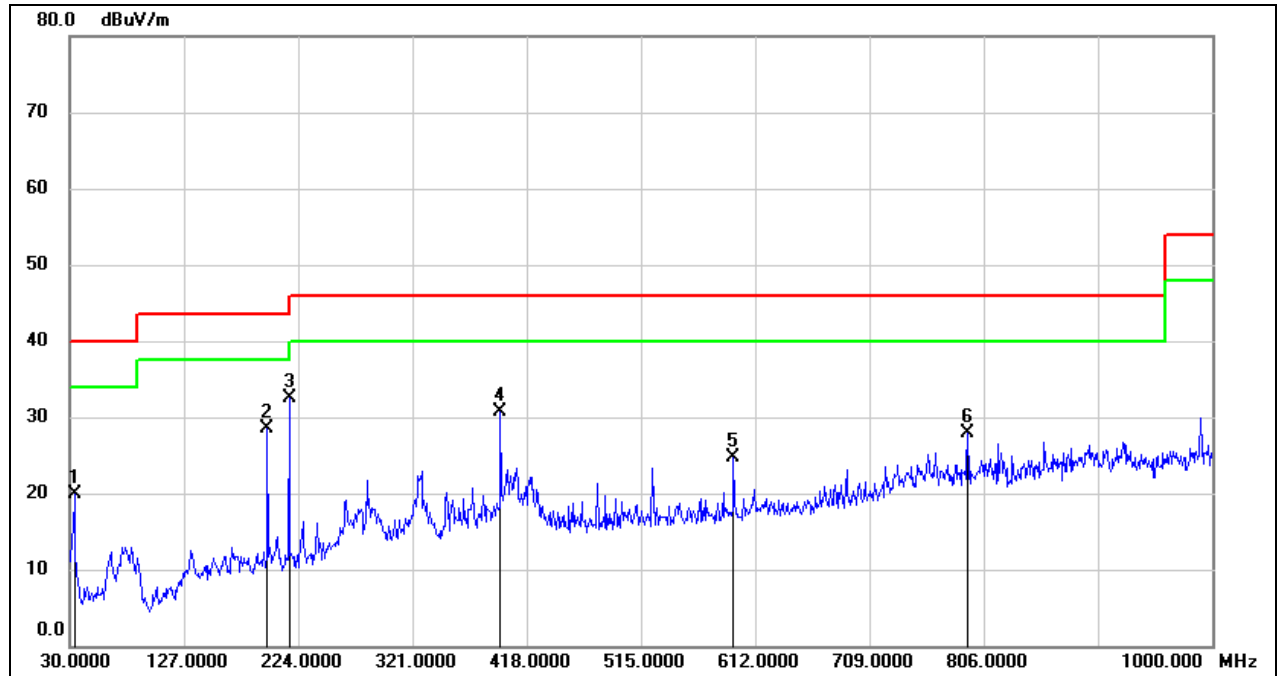

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	34.44	-14.52	19.92	40.00	-20.08	QP
2	197.8100	40.15	-11.57	28.58	43.50	-14.92	QP
3	216.2400	44.88	-12.45	32.43	46.00	-13.57	QP
4	395.6900	39.96	-9.31	30.65	46.00	-15.35	QP
5	593.5700	30.62	-5.95	24.67	46.00	-21.33	QP
6	792.4200	30.03	-2.14	27.89	46.00	-18.11	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

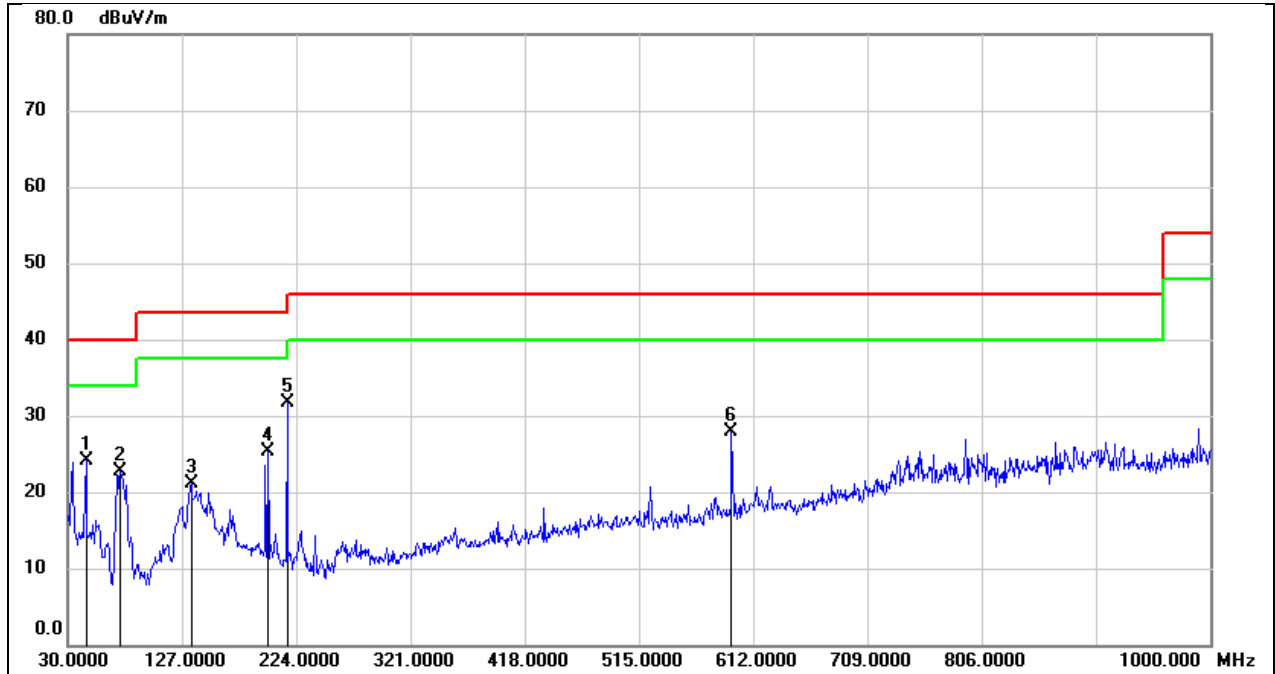

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	45.5200	39.19	-15.01	24.18	40.00	-15.82	QP
2	74.6200	38.86	-16.21	22.65	40.00	-17.35	QP
3	134.7600	35.24	-14.22	21.02	43.50	-22.48	QP
4	199.7500	36.98	-11.60	25.38	43.50	-18.12	QP
5	216.2400	44.12	-12.45	31.67	46.00	-14.33	QP
6	593.5700	33.93	-5.95	27.98	46.00	-18.02	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

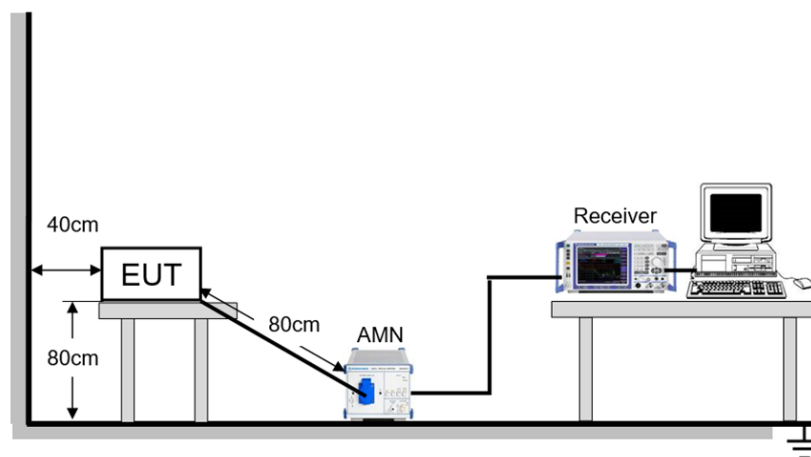

TEST ENVIRONMENT


Temperature	25.4℃	Relative Humidity	63.5%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	August 9, 2024	Test By	Kebo Zhang
-----------	----------------	---------	------------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

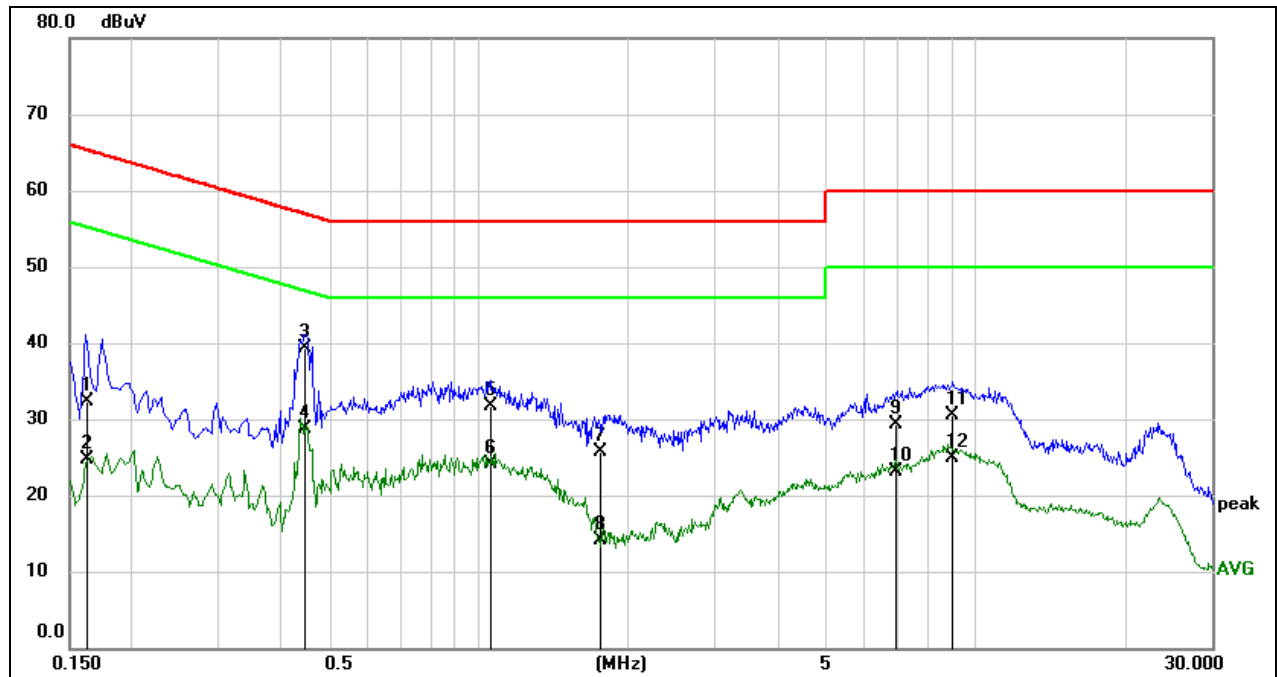


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1625	22.06	10.31	32.37	65.34	-32.97	QP
2	0.1625	14.39	10.31	24.70	55.34	-30.64	AVG
3	0.4483	29.16	10.24	39.40	56.91	-17.51	QP
4	0.4483	18.54	10.24	28.78	46.91	-18.13	AVG
5	1.0530	21.66	10.02	31.68	56.00	-24.32	QP
6	1.0530	14.16	10.02	24.18	46.00	-21.82	AVG
7	1.7655	15.66	9.96	25.62	56.00	-30.38	QP
8	1.7655	4.22	9.96	14.18	46.00	-31.82	AVG
9	6.9255	18.95	10.33	29.28	60.00	-30.72	QP
10	6.9255	12.80	10.33	23.13	50.00	-26.87	AVG
11	8.9735	20.24	10.33	30.57	60.00	-29.43	QP
12	8.9735	14.52	10.33	24.85	50.00	-25.15	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

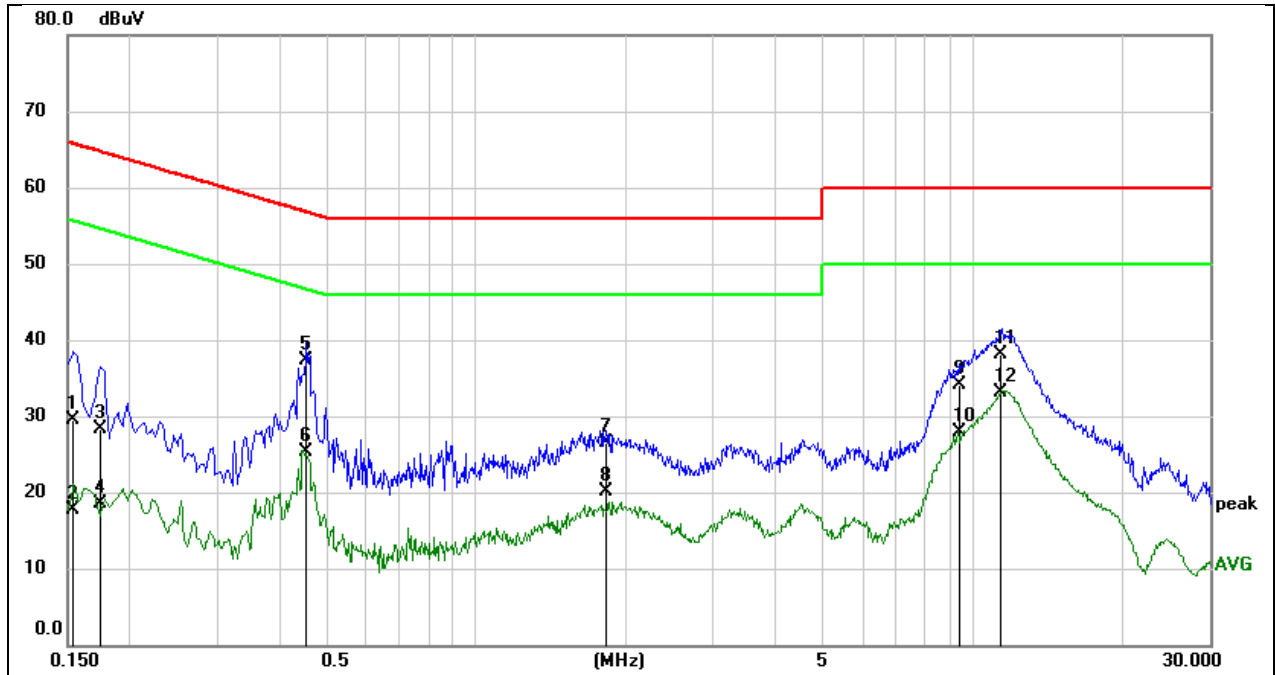

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1543	19.34	10.23	29.57	65.77	-36.20	QP
2	0.1543	7.52	10.23	17.75	55.77	-38.02	AVG
3	0.1737	18.10	10.19	28.29	64.78	-36.49	QP
4	0.1737	8.24	10.19	18.43	54.78	-36.35	AVG
5	0.4509	27.23	10.06	37.29	56.86	-19.57	QP
6	0.4509	15.24	10.06	25.30	46.86	-21.56	AVG
7	1.8218	16.50	10.00	26.50	56.00	-29.50	QP
8	1.8218	10.07	10.00	20.07	46.00	-25.93	AVG
9	9.4217	23.77	10.43	34.20	60.00	-25.80	QP
10	9.4217	17.38	10.43	27.81	50.00	-22.19	AVG
11	11.4017	27.59	10.49	38.08	60.00	-21.92	QP
12	11.4017	22.65	10.49	33.14	50.00	-16.86	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA


11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5180	22.00	5169.00	5191.00
		5200	21.72	5188.92	5210.64
		5240	21.68	5229.24	5250.92
		5260	21.60	5249.00	5270.60
		5280	21.44	5269.12	5290.56
		5320	21.28	5309.40	5330.68
		5500	21.64	5489.20	5510.84
		5580	21.72	5569.00	5590.72
		5700	21.72	5689.16	5710.88
		5720	21.44	5709.12	5730.56
		5720 UNII-2C	15.88	5709.12	5725
		5720 UNII-3	5.56	5725	5730.56
		5745	21.36	5734.56	5755.92
		5785	21.84	5773.96	5795.80
		5825	21.56	5814.08	5835.64
11N20SISO	Ant1	5180	22.32	5168.60	5190.92
		5200	21.92	5189.04	5210.96
		5240	21.68	5228.96	5250.64
		5260	21.40	5249.04	5270.44
		5280	21.80	5269.12	5290.92
		5320	22.04	5308.92	5330.96
		5500	21.44	5489.00	5510.44
		5580	21.76	5569.12	5590.88
		5700	21.68	5689.04	5710.72
		5720	21.60	5709.00	5730.60
		5720 UNII-2C	16	5709.00	5725
		5720 UNII-3	5.6	5725	5730.60
		5745	21.60	5733.92	5755.52
		5785	21.60	5774.04	5795.64
		5825	22.48	5814.12	5836.60
11N40SISO	Ant1	5190	40.96	5169.36	5210.32
		5230	40.88	5209.52	5250.40
		5270	41.12	5249.28	5290.40
		5310	41.28	5289.44	5330.72
		5510	40.96	5489.44	5530.40
		5550	41.12	5529.36	5570.48
		5670	41.20	5649.44	5690.64
		5710	41.04	5689.52	5730.56
		5710 UNII-2C	35.48	5689.52	5725
		5710 UNII-3	5.56	5725	5730.56
		5755	41.36	5734.20	5775.56
		5795	41.68	5773.80	5815.48
11AX20SISO	Ant1	5180	21.96	5168.68	5190.64
		5200	22.00	5188.80	5210.80
		5240	22.04	5228.96	5251.00
		5260	22.20	5248.84	5271.04
		5280	21.76	5269.00	5290.76
		5320	22.04	5308.92	5330.96
		5500	21.88	5488.92	5510.80
		5580	21.88	5568.92	5590.80
		5700	22.20	5688.96	5711.16
		5720	21.36	5709.24	5730.60

		5720 UNII-2C	15.76	5709.24	5725
		5720 UNII-3	5.6	5725	5730.60
		5745	21.88	5734.04	5755.92
		5785	21.96	5773.88	5795.84
		5825	22.48	5813.72	5836.20
11AX40SISO	Ant1	5190	41.20	5169.12	5210.32
		5230	41.44	5209.28	5250.72
		5270	41.68	5249.20	5290.88
		5310	41.20	5289.36	5330.56
		5510	41.52	5489.04	5530.56
		5550	41.28	5529.28	5570.56
		5670	41.60	5649.28	5690.88
		5710	41.28	5689.36	5730.64
		5710 UNII-2C	35.64	5689.36	5725
		5710 UNII-3	5.64	5725	5730.64
		5755	41.44	5734.20	5775.64
		5795	41.52	5773.96	5815.48


11.1.2. Test Graphs

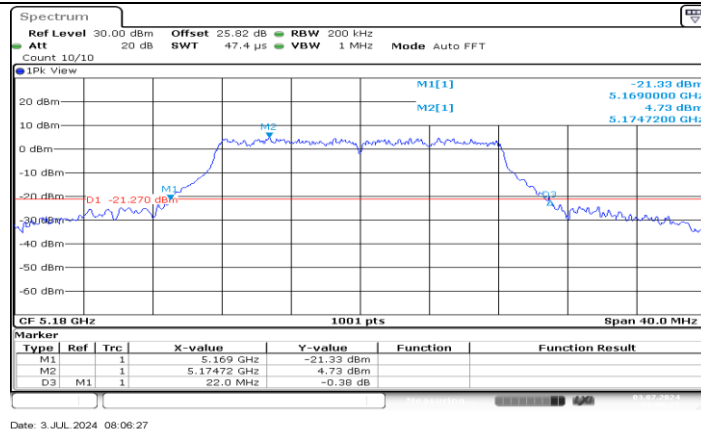


11A Ant1 5180

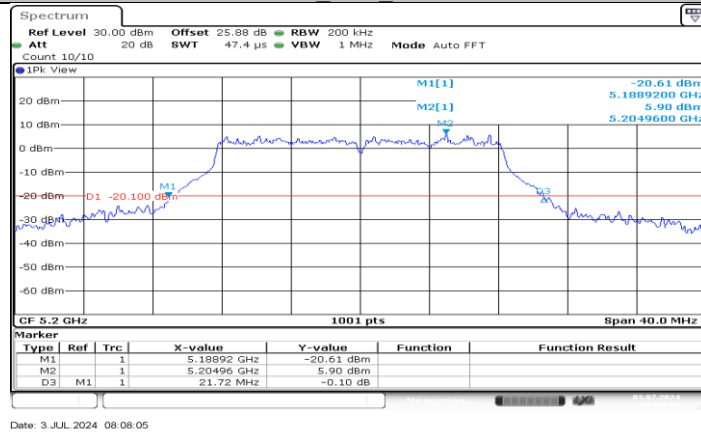


11A Ant1 5200

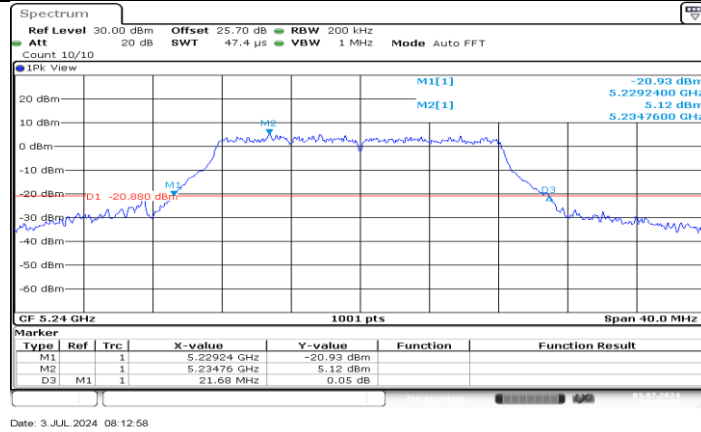


11A Ant1 5240

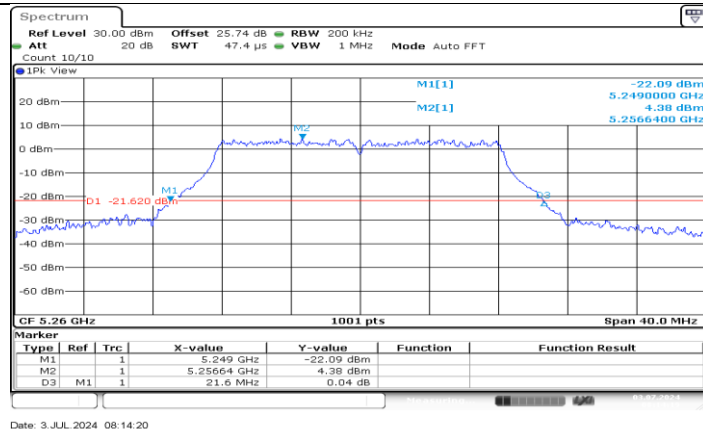


11A_Ant1_5260

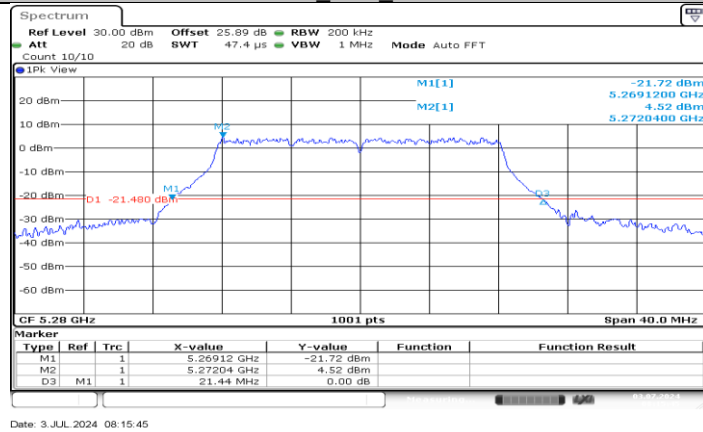


11A_Ant1_5280

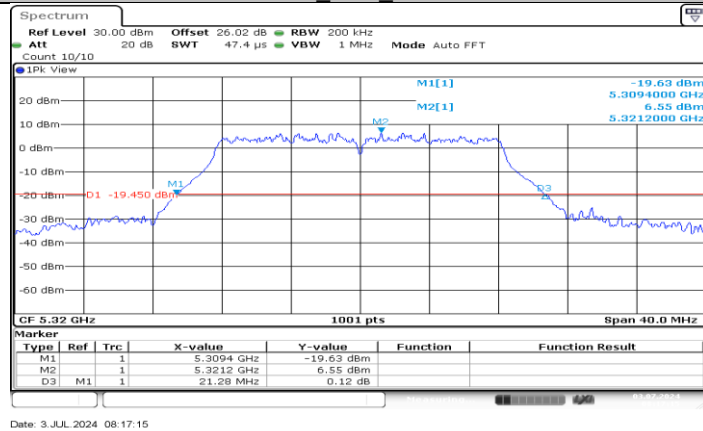


11A_Ant1_5320

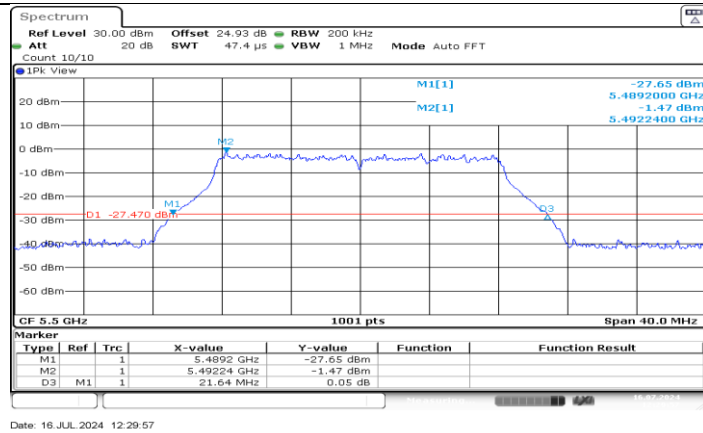


11A_Ant1_5500

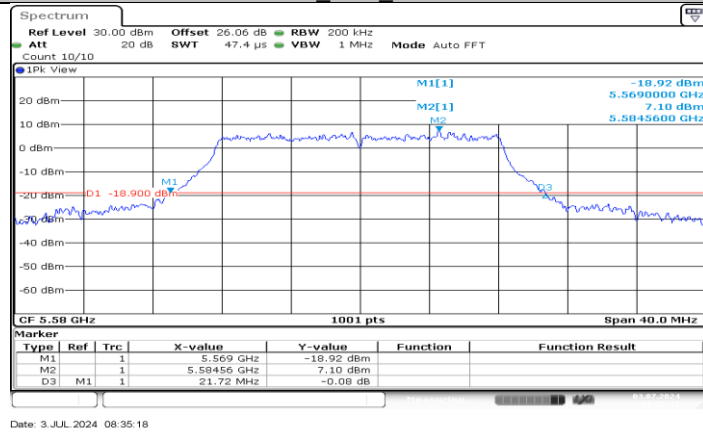


11A_Ant1_5580

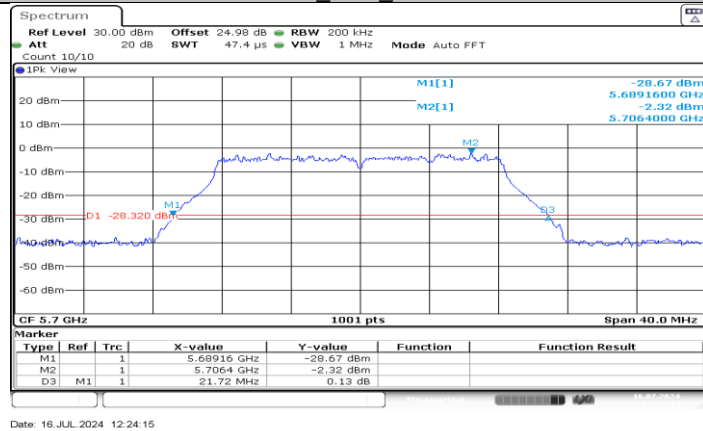


11A_Ant1_5700

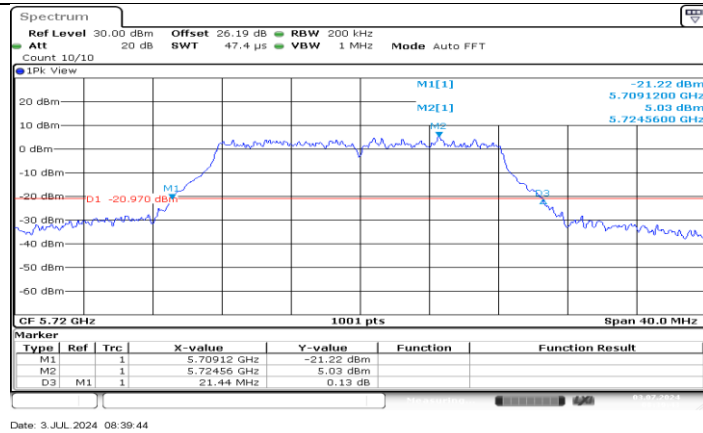


11A_Ant1_5720

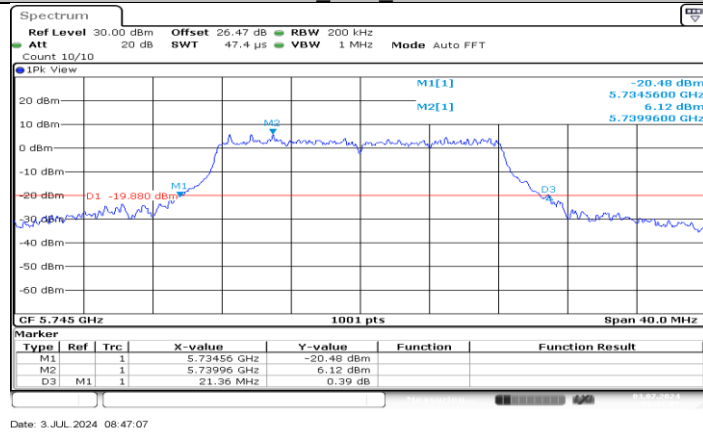


11A_Ant1_5745

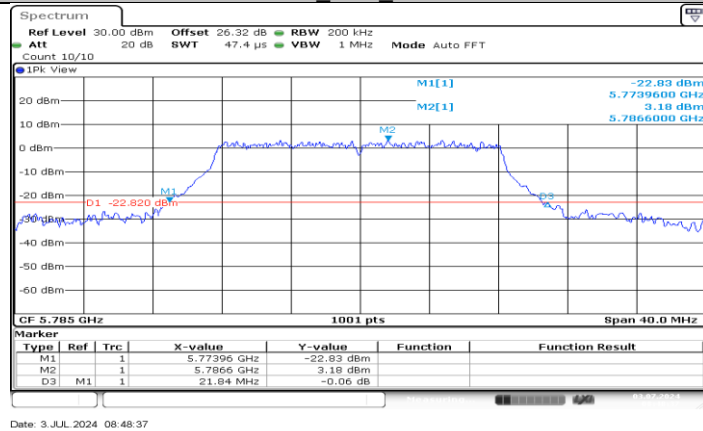


11A_Ant1_5785

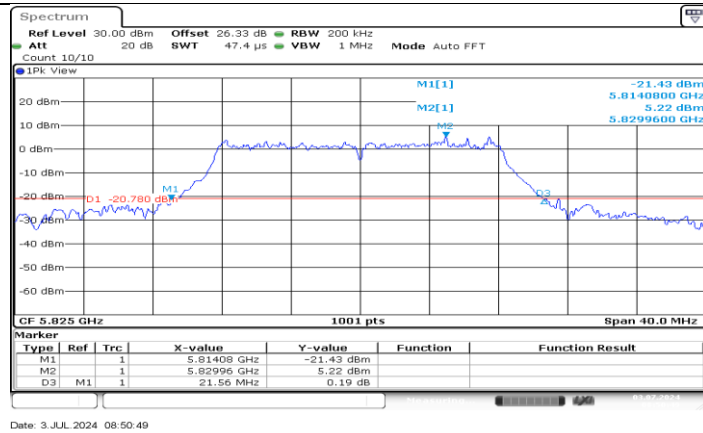


11A_Ant1_5825

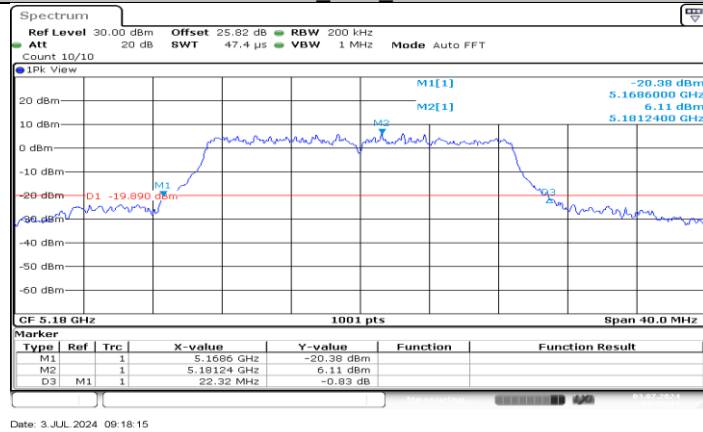


11N20SISO_Ant1_5180

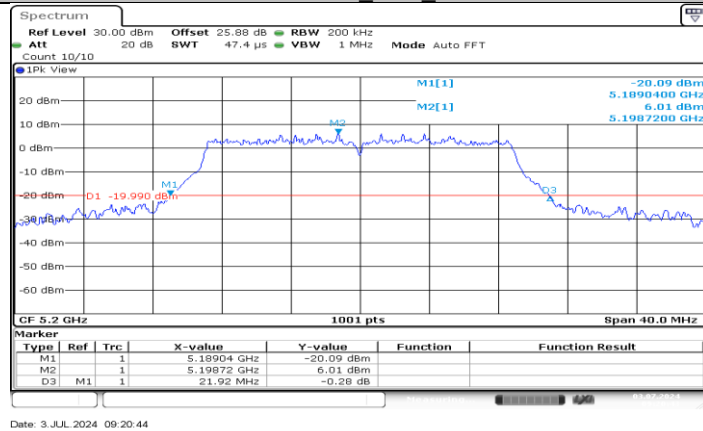


11N20SISO_Ant1_5200

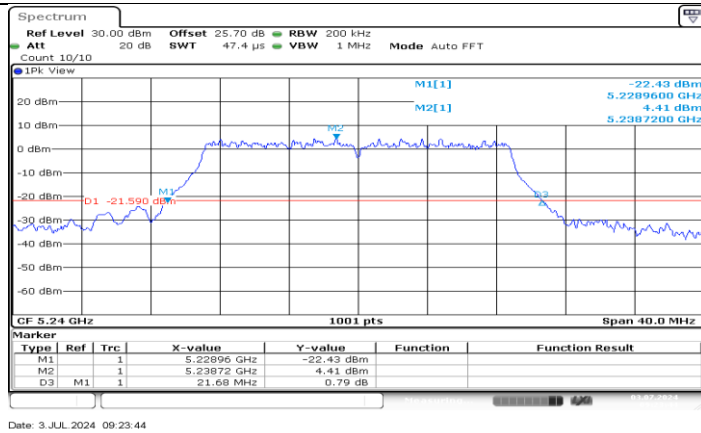


11N20SISO_Ant1_5240

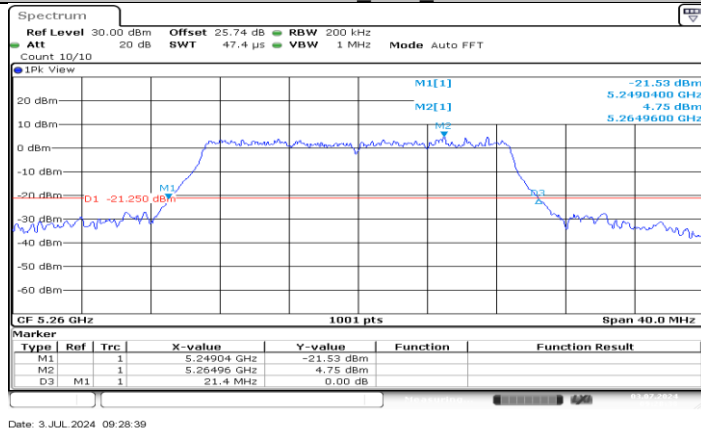


11N20SISO_Ant1_5260

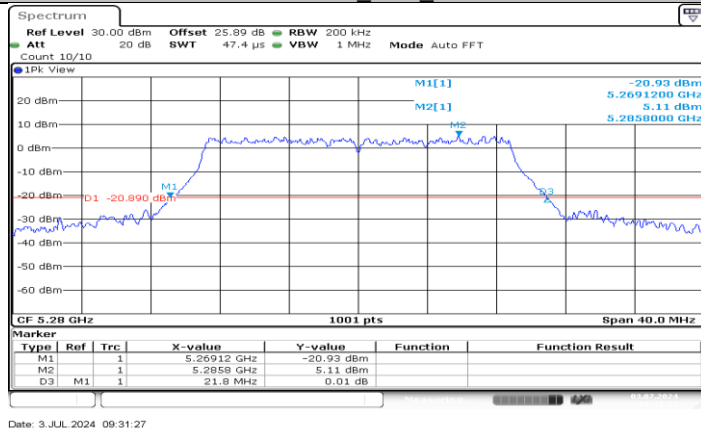


11N20SISO_Ant1_5280

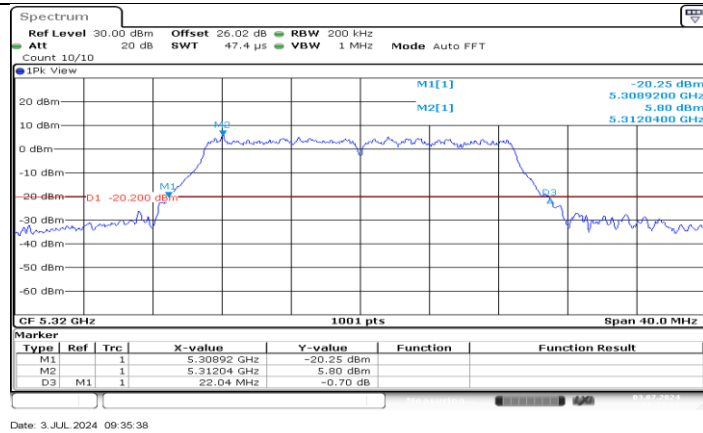


11N20SISO_Ant1_5320

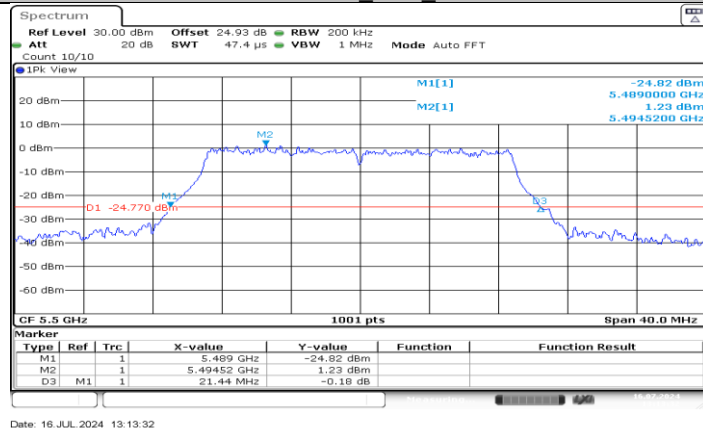


11N20SISO_Ant1_5500

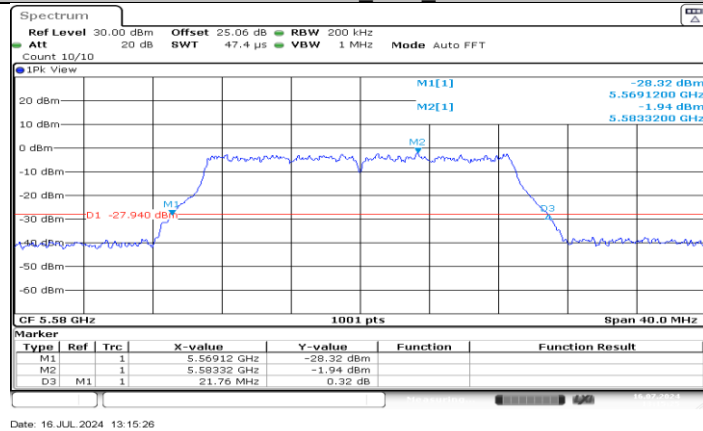


11N20SISO_Ant1_5580

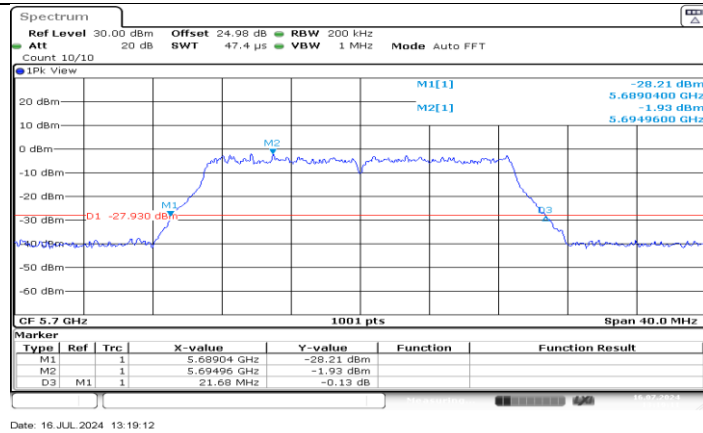


11N20SISO_Ant1_5700

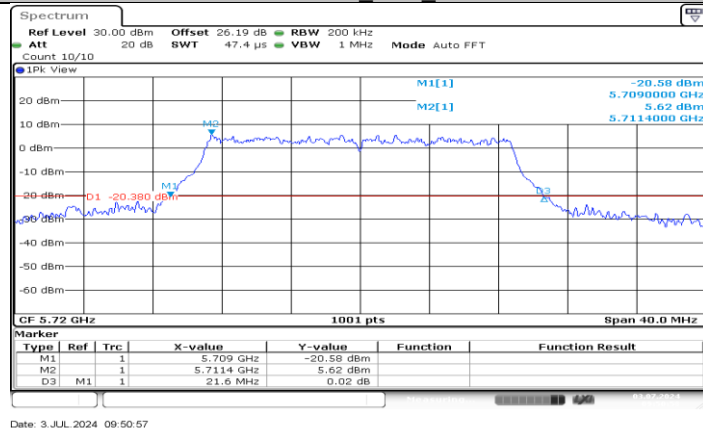


11N20SISO_Ant1_5720

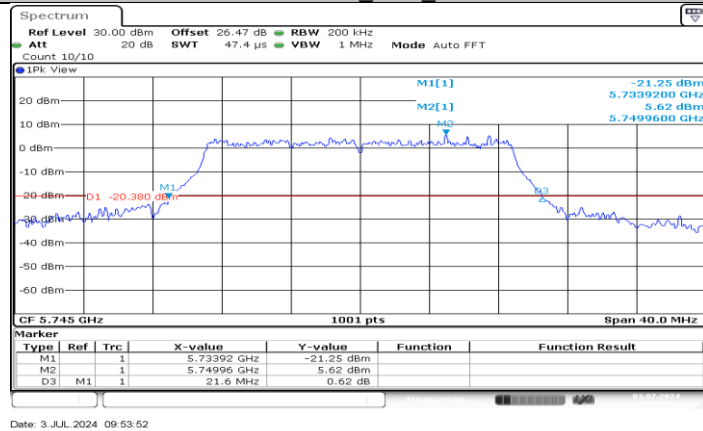


11N20SISO_Ant1_5745

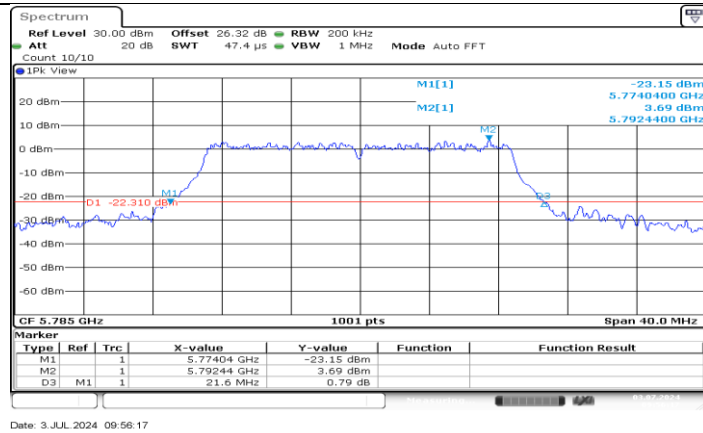


11N20SISO_Ant1_5785

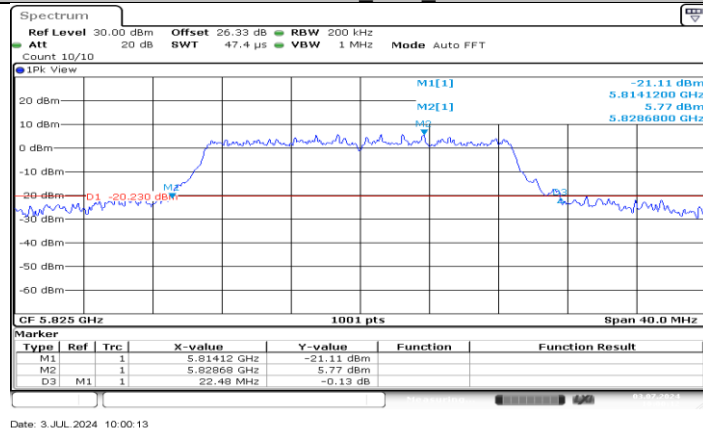


11N20SISO_Ant1_5825

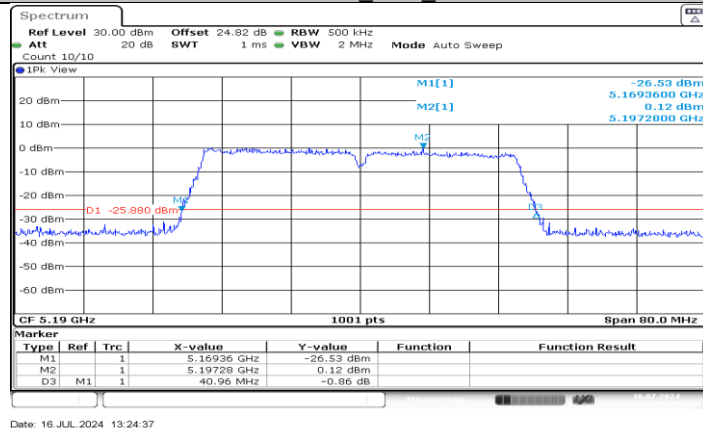


11N40SISO_Ant1_5190

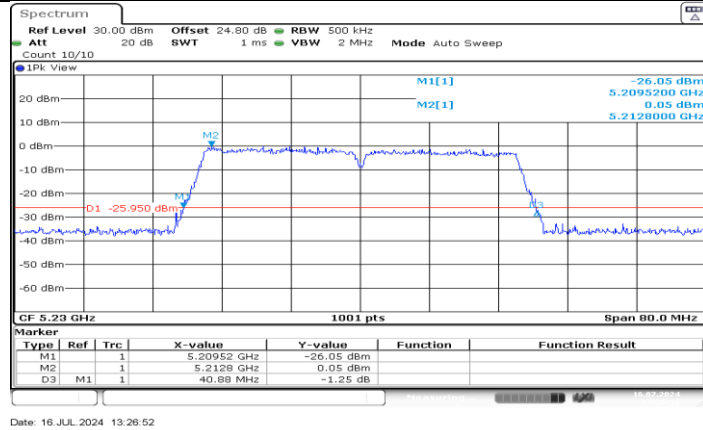


11N40SISO_Ant1_5230

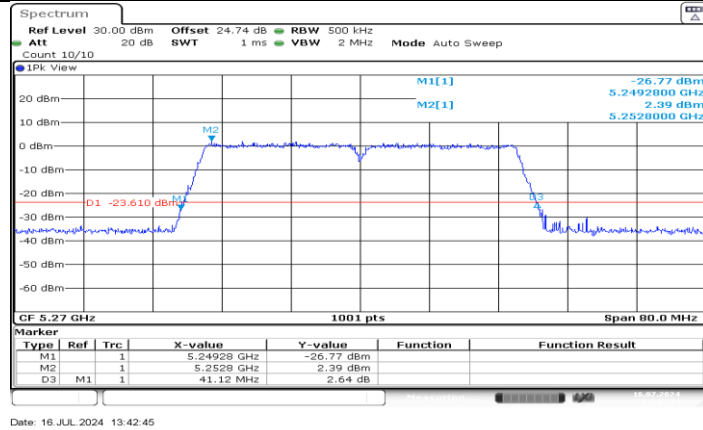


11N40SISO_Ant1_5270

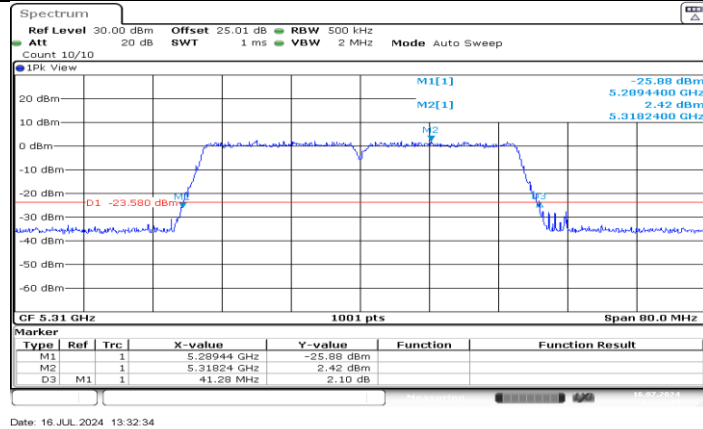


11N40SISO_Ant1_5310

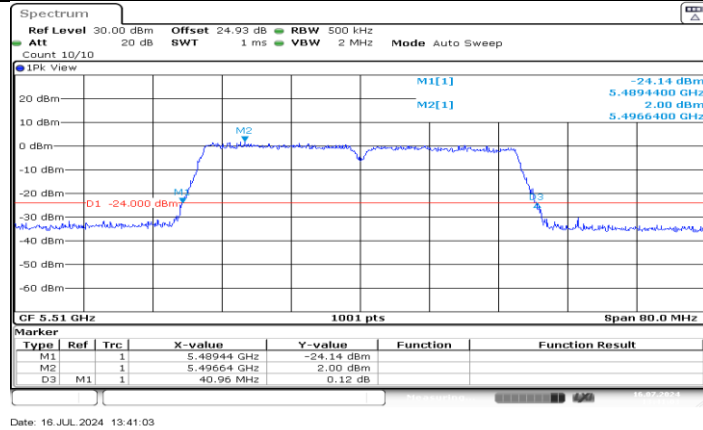


11N40SISO_Ant1_5510

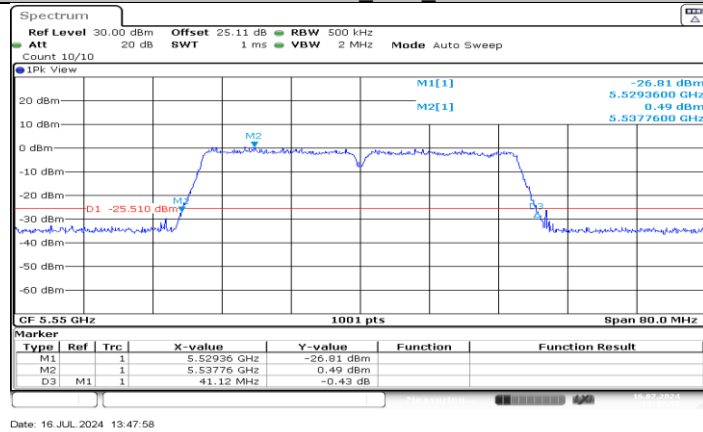


11N40SISO_Ant1_5550

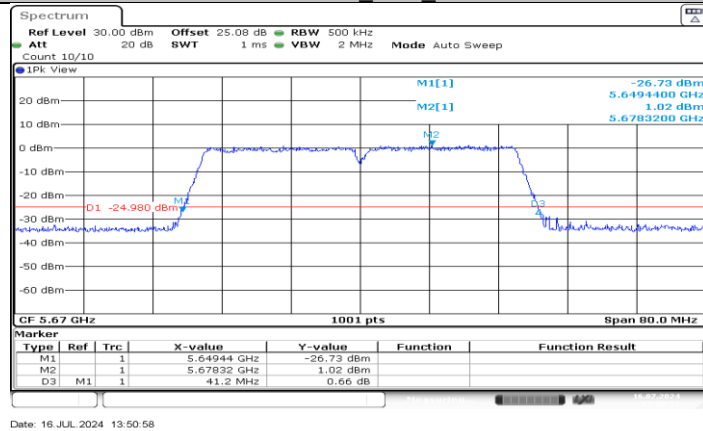


11N40SISO_Ant1_5670

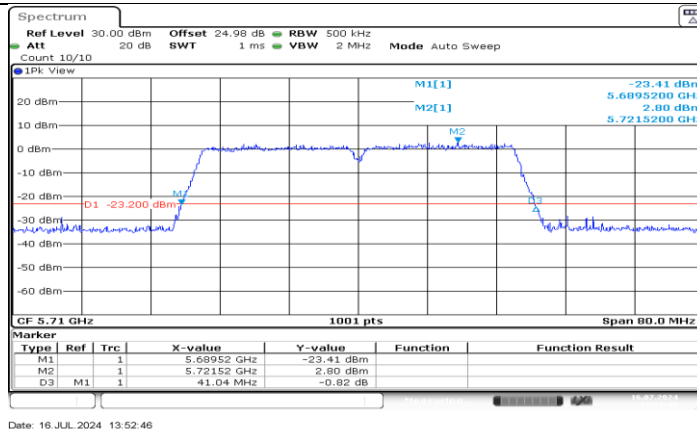


11N40SISO_Ant1_5710

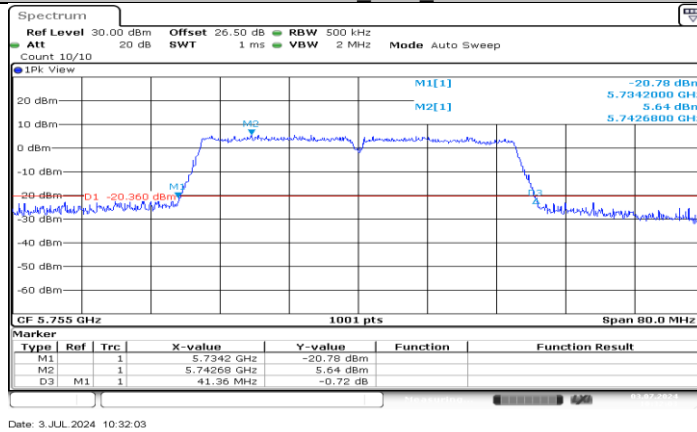


11N40SISO_Ant1_5755

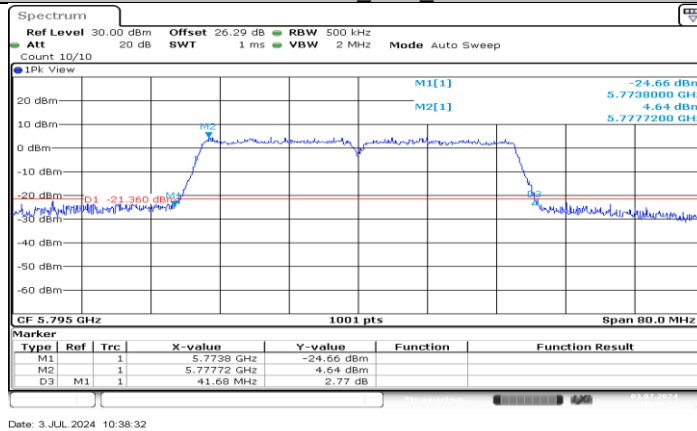


11N40SISO_Ant1_5795

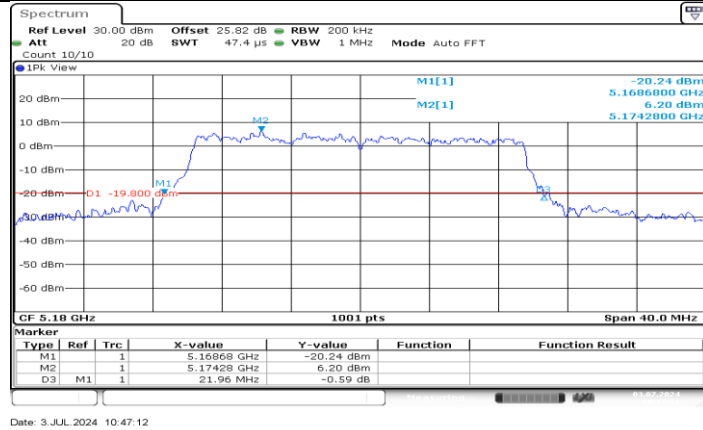

11AX20SISO_Ant1_5180

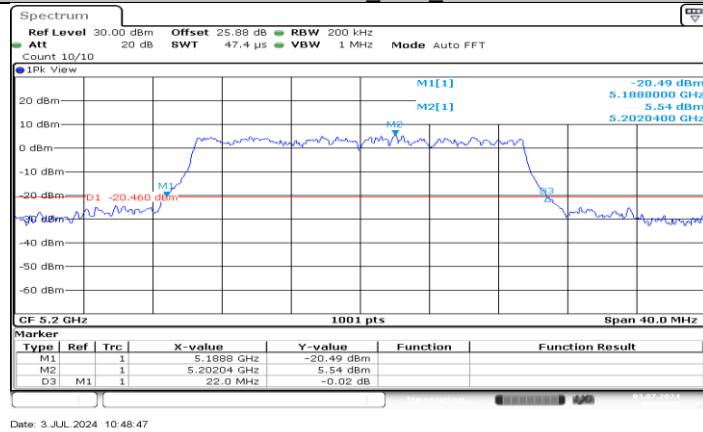

11AX20SISO_Ant1_5200

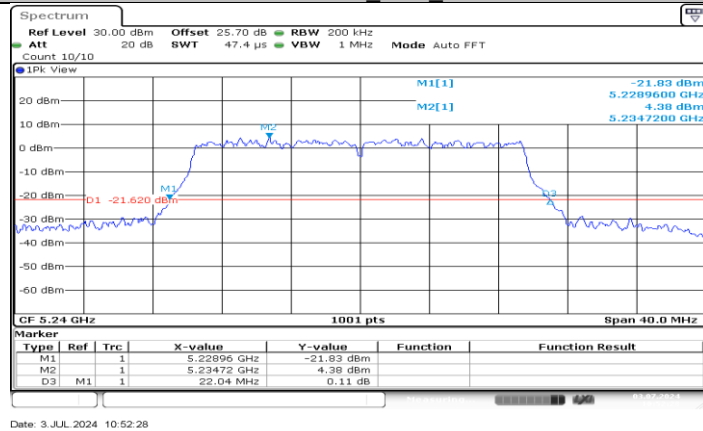

11AX20SISO_Ant1_5240