

Manufacturer	ELEC
Address	No. 410, Building D2, Luogang Agile Plaza, Shui West Road, Science City, Huangpu District, Guangzhou
Model	OA-W01
Antenna type	Pcb antenna
Antenna Gain	-2dBi for 2.4G

1.Test equipment and conditions:



1.1.Network Analyzer

Agilent 8753D Agilent 5071B


1.2.Communication test equipment

Agilent E5515C R&S CMW500

1.3.Test system

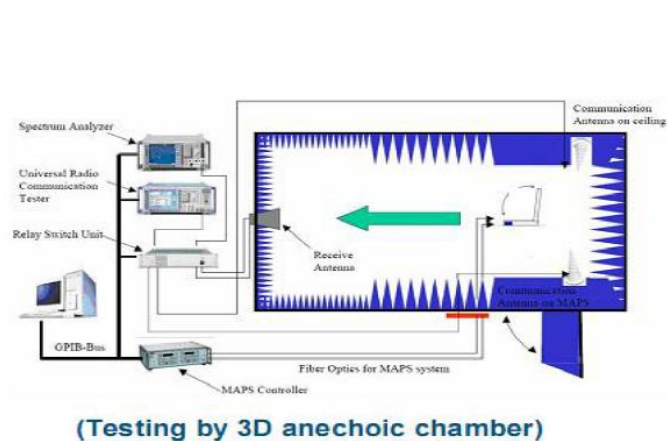


Phi axis test




Theta axis test

1.4. Matching circuit

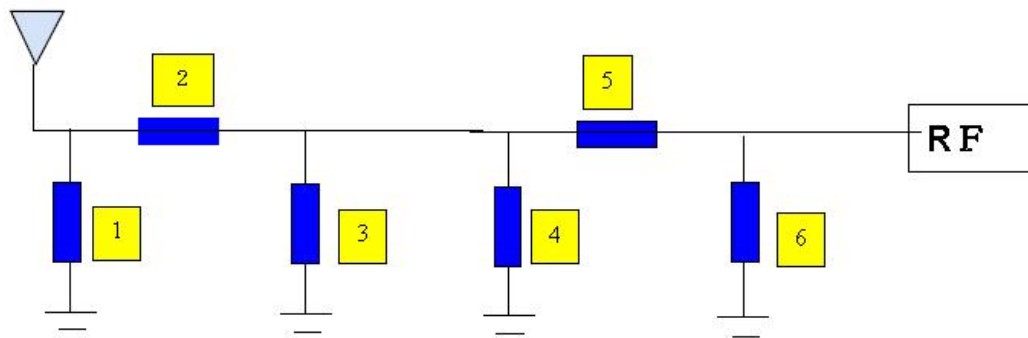

2. Test Data:


2.1. Standing wave ratio

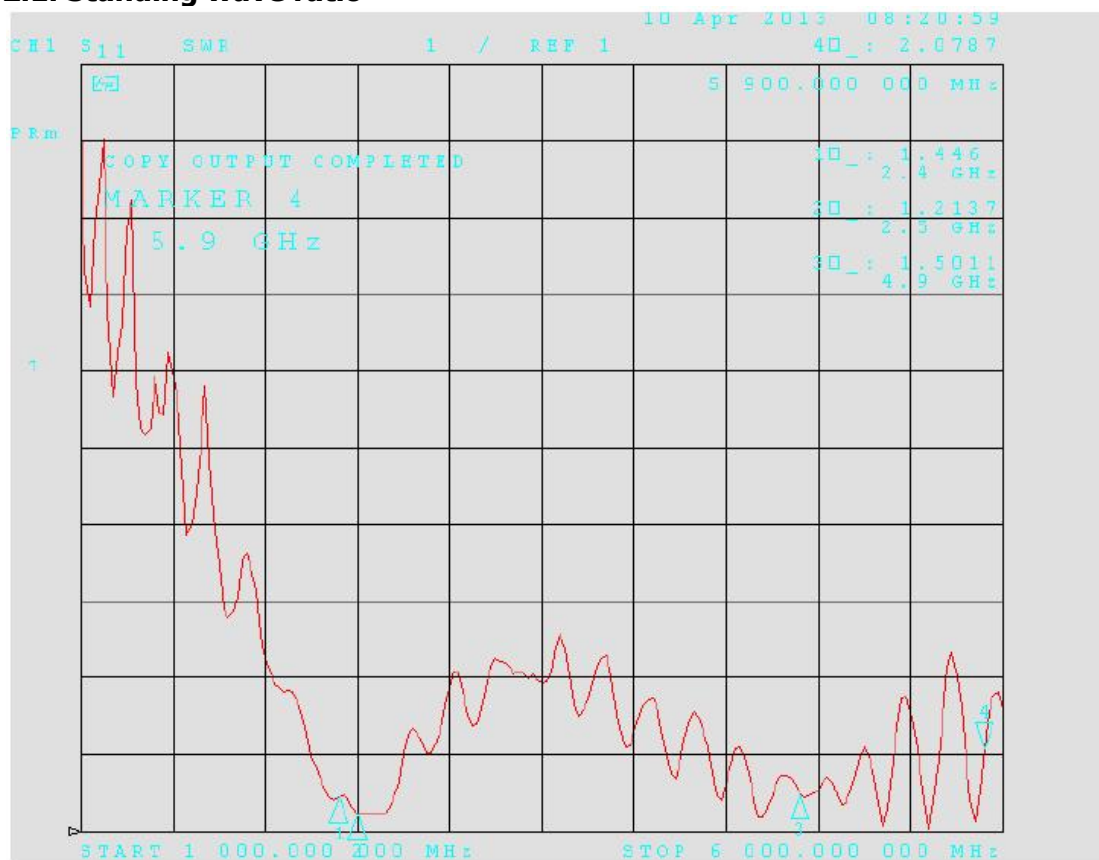

2.2.Efficiency

2.4G										
Fred (MHz)	Effi (%)	Effi (%)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Attenut (Hor)	Attenut (Ver)
2400	44.38	-2.79	-2.26	-4.3	40.28	13.32	2.29	-23.79	48.26	49.33
2410	44.63	-2.46	-2.66	-4.8	42.42	13.54	2.46	-21.29	48.66	49.58
2420	44.94	-2.12	-2.00	-4.14	40.96	14.77	2.68	-20.97	48.71	49.88
2430	44.27	-2.70	-2.40	-4.54	43.24	15.23	2.29	-22.77	48.21	49.35
2440	44.75	-2.39	-2.30	-4.44	40.71	15.79	2.53	-25.39	48.58	49.56
2450	44.82	-1.83	-2.50	-4.64	41.19	16.18	3.15	-21.98	49.11	49.99
2460	44.28	-2.63	-2.11	-4.25	42.39	18.25	2.31	-25.62	48.37	49.22
2470	44.49	-2.34	-2.44	-4.58	41.78	18.80	2.50	-24.31	48.50	49.54
2480	45.08	-2.23	-2.35	-4.49	40.89	19.05	3.14	-23.23	48.98	49.99
2490	44.21	-2.68	-2.25	-4.39	43.21	19.23	2.35	-21.77	48.24	49.20
2500	44.46	-2.32	-2.61	-4.75	40.44	19.62	2.48	-20.30	48.48	49.61

2.3.Directivity diagram

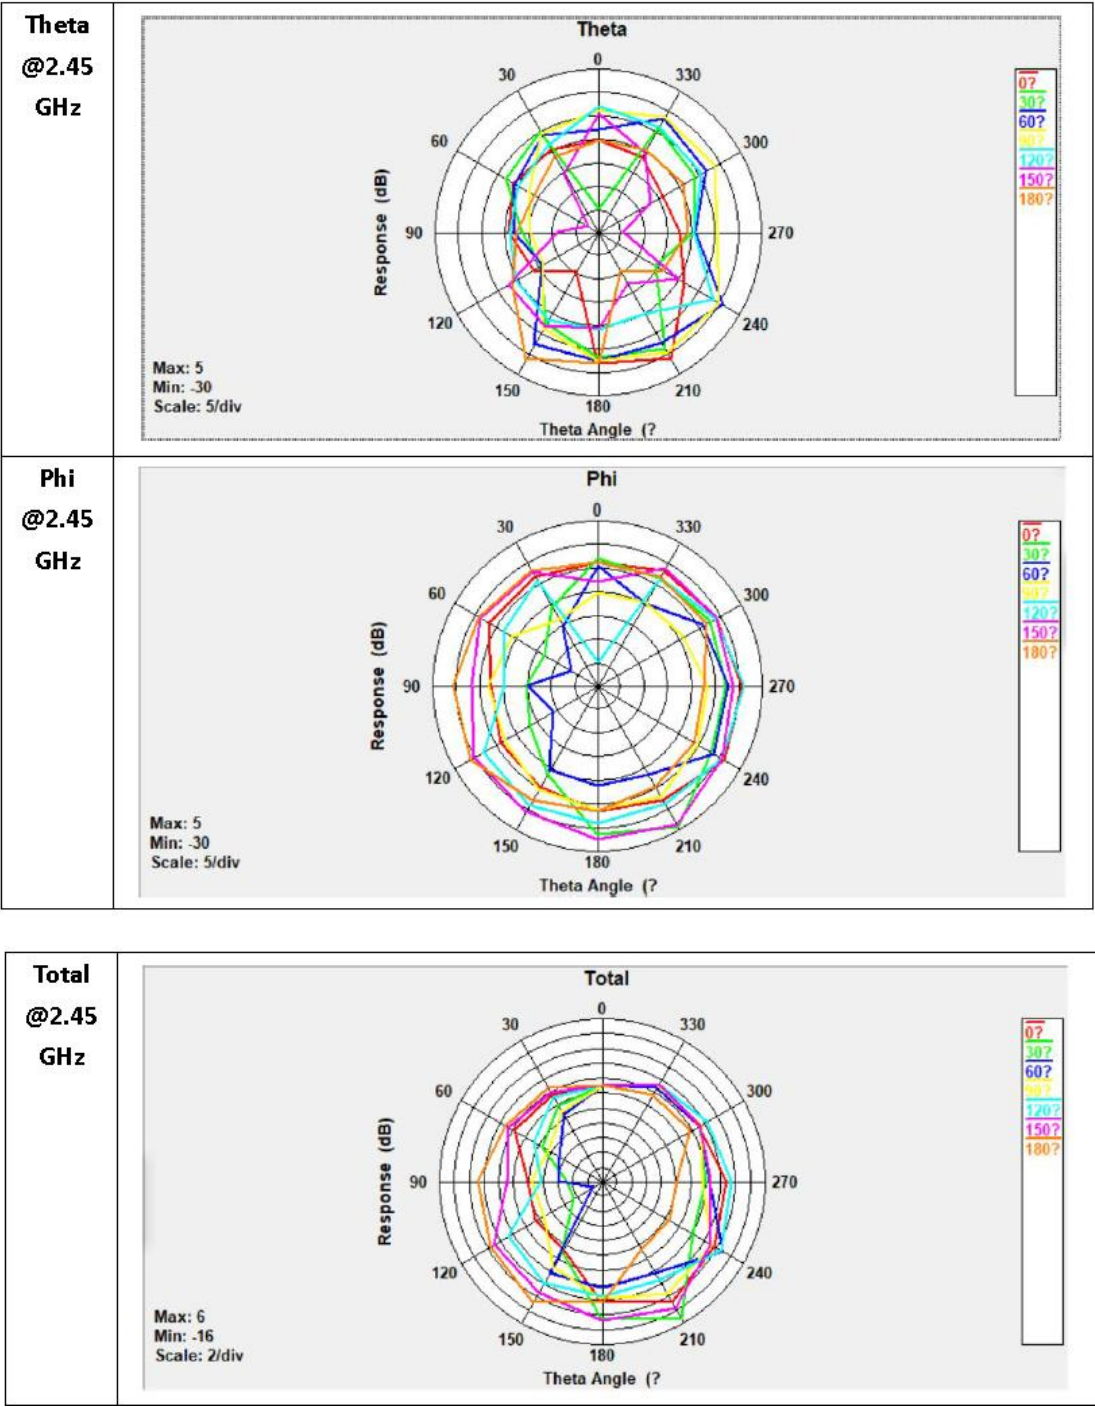

3. Antenna drawing:

