




11AX40SISO_Ant1_2422




11AX40SISO_Ant1_2437

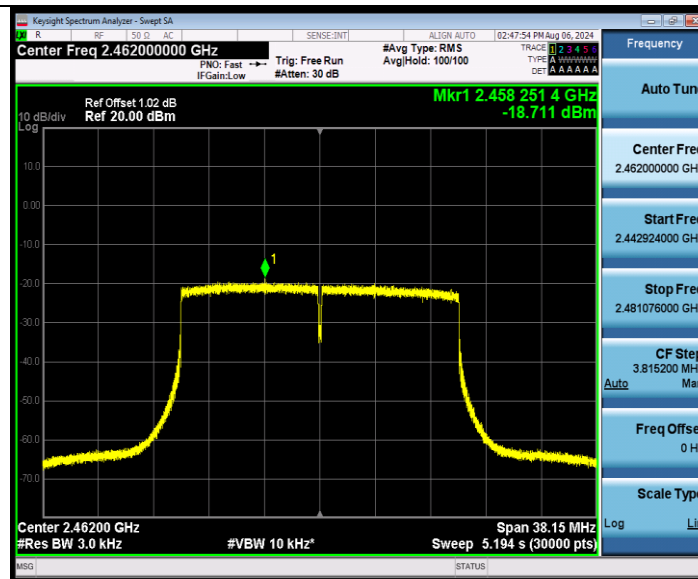


11AX40SISO_Ant1_2452




11AX20SISO_Ant1_2412_26Tone_RU0

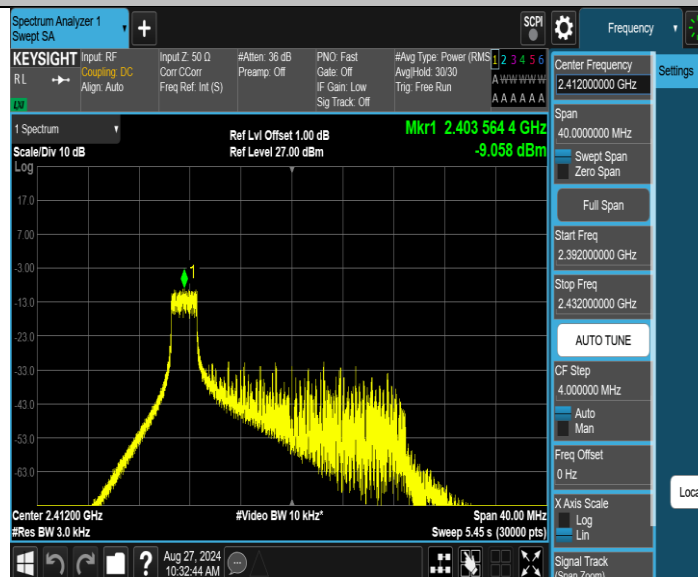


11AX20SISO_Ant1_2412_52Tone_RU37

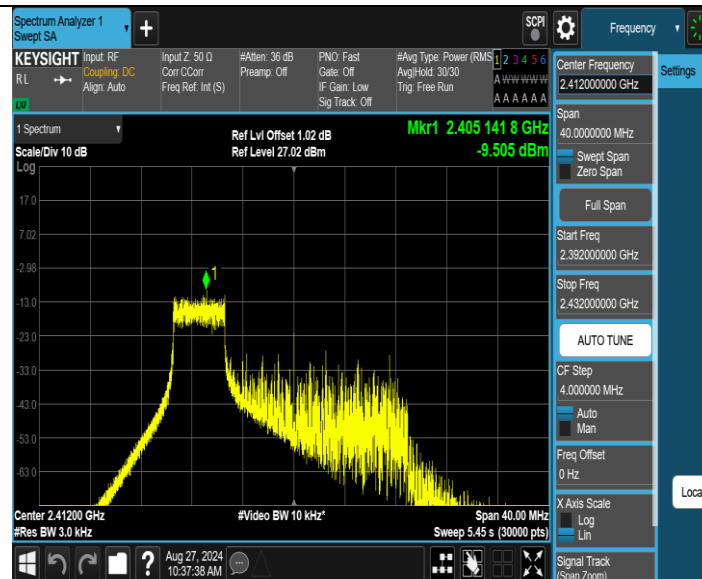


11AX20SISO_Ant1_2412_106Tone_RU53

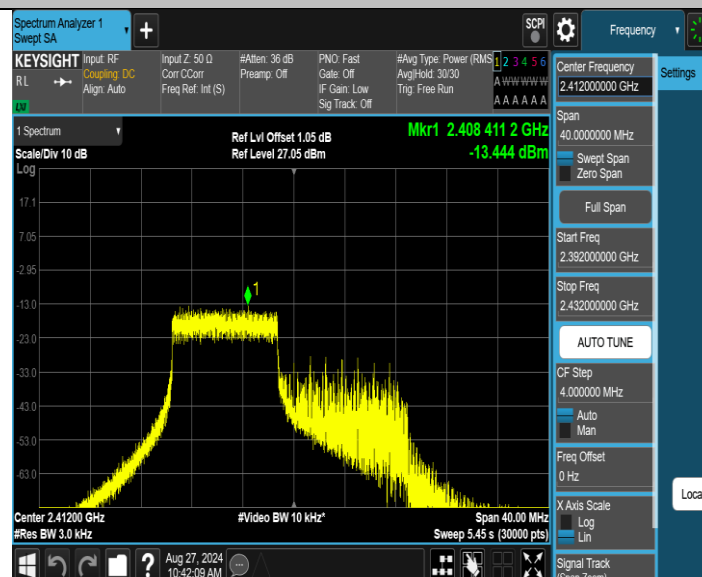


11AX20SISO_Ant1_2437_26Tone_RU0

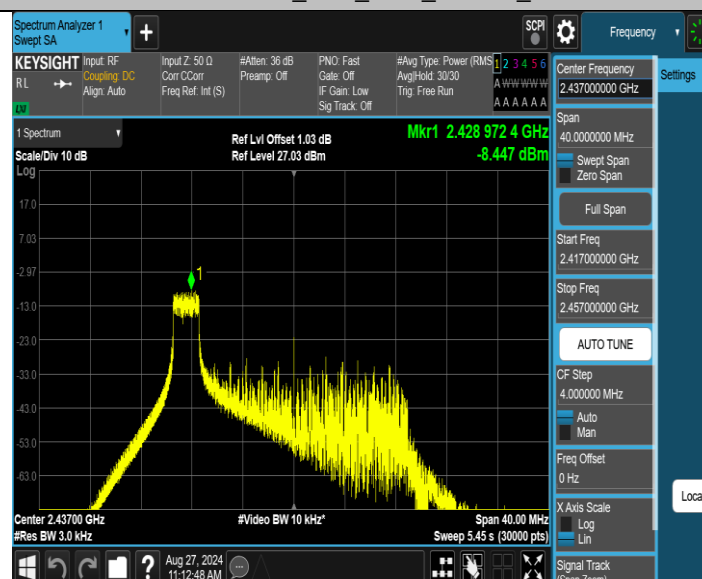


11AX20SISO_Ant1_2437_52Tone_RU37

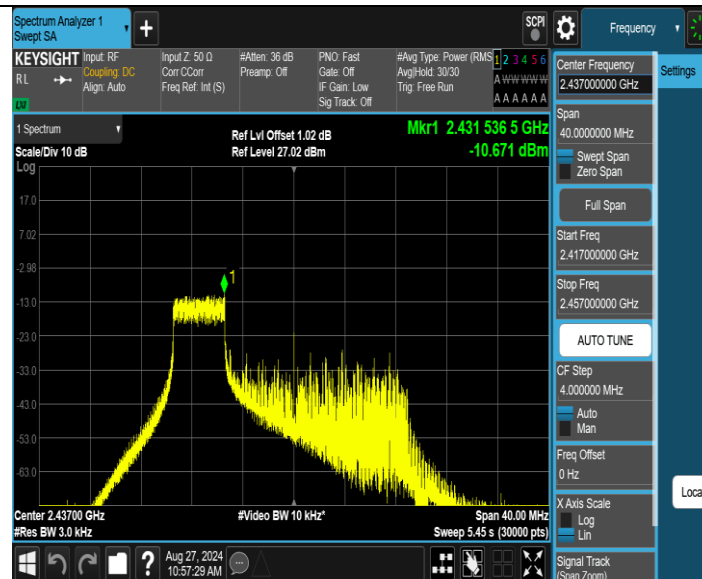


11AX20SISO_Ant1_2437_106Tone_RU53

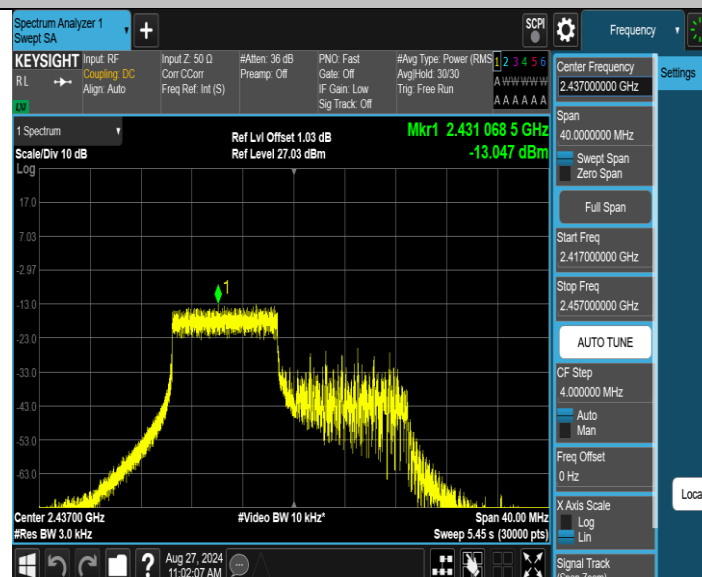


11AX20SISO_Ant1_2462_26Tone_RU0

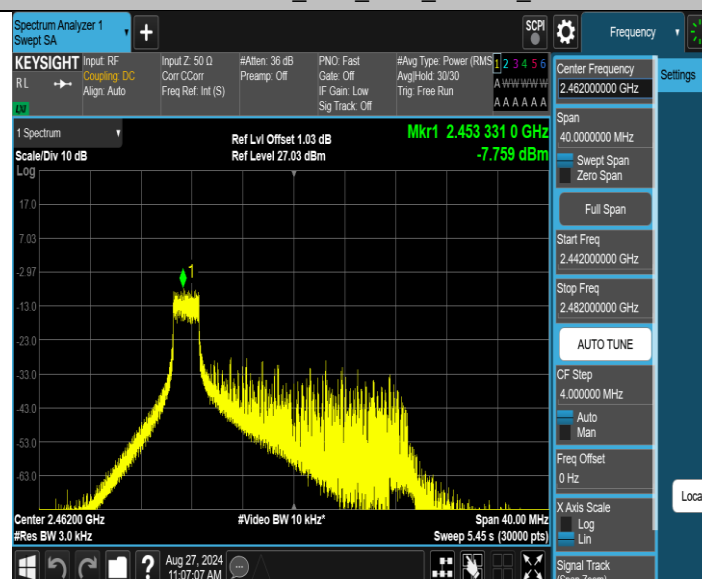

11AX20SISO_Ant1_2462_52Tone_RU37

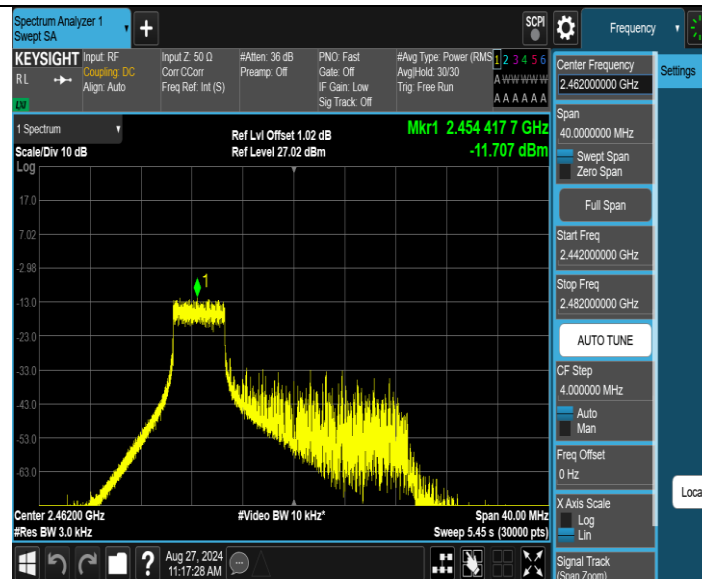


11AX20SISO_Ant1_2462_106Tone_RU53

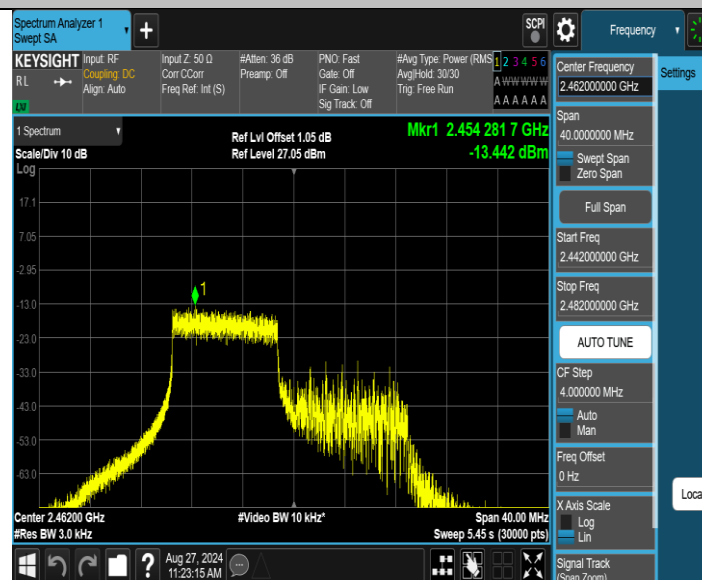


Appendix D: Band edge measurements

Profile: 2430820R	Page No.: 1
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 20:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2412MHz by 802.11b Ant 1	

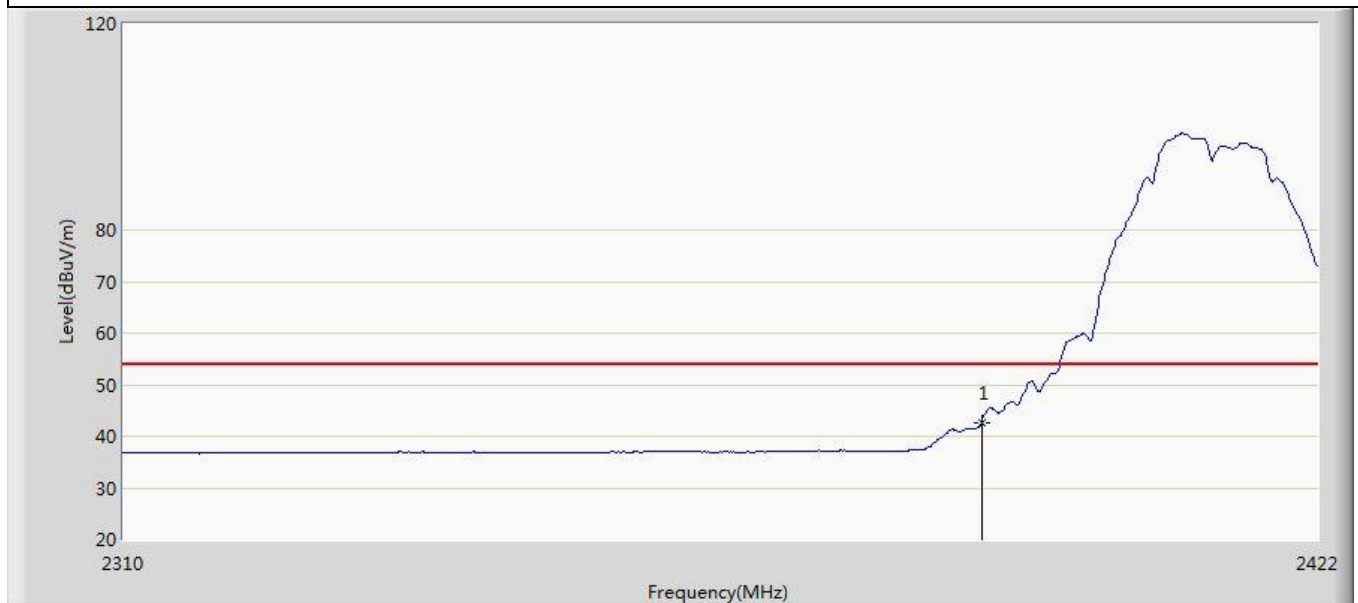


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	42.696	8.545	-11.304	54.000	34.151	AV

Profile: 2430820R	Page No.: 2
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 20:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2412MHz by 802.11b Ant 1	

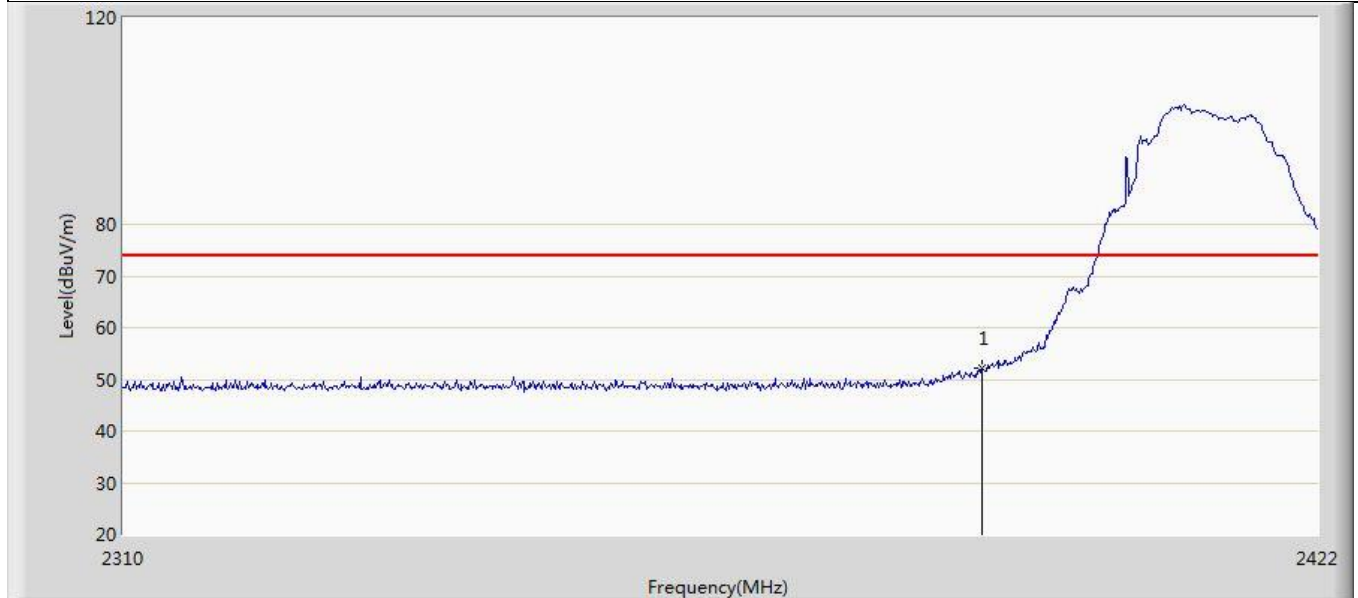


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.047	17.896	-21.953	74.000	34.151	PK

Profile: 2430820R	Page No.: 3
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 20:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2412MHz by 802.11b Ant 1	

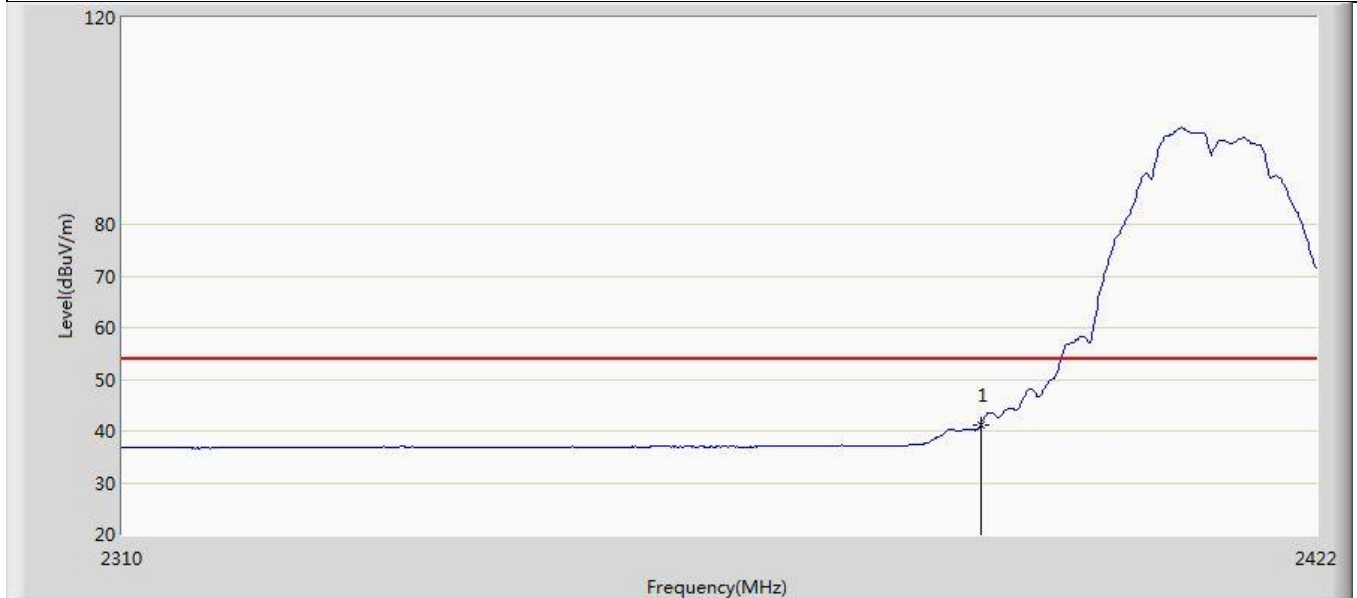


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.236	7.085	-12.764	54.000	34.151	AV

Profile: 2430820R	Page No.: 4
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 20:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2412MHz by 802.11b Ant 1	

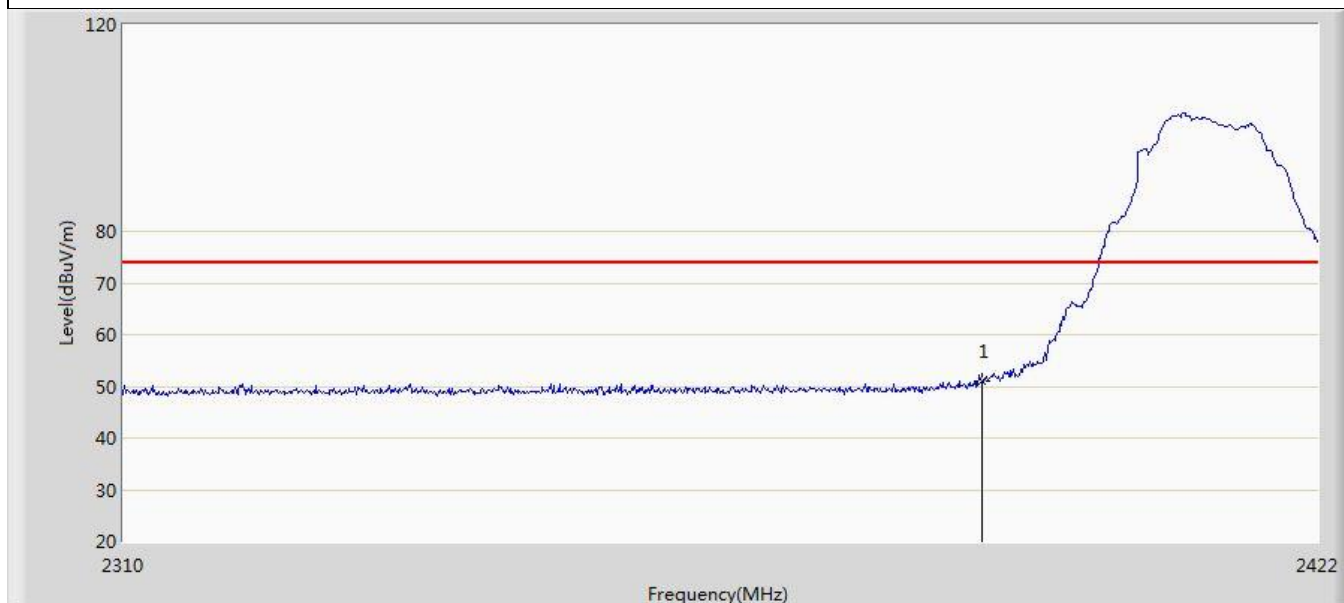


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.985	16.834	-23.015	74.000	34.151	PK

Profile: 2430820R	Page No.: 5
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2462MHz by 802.11b Ant 1	

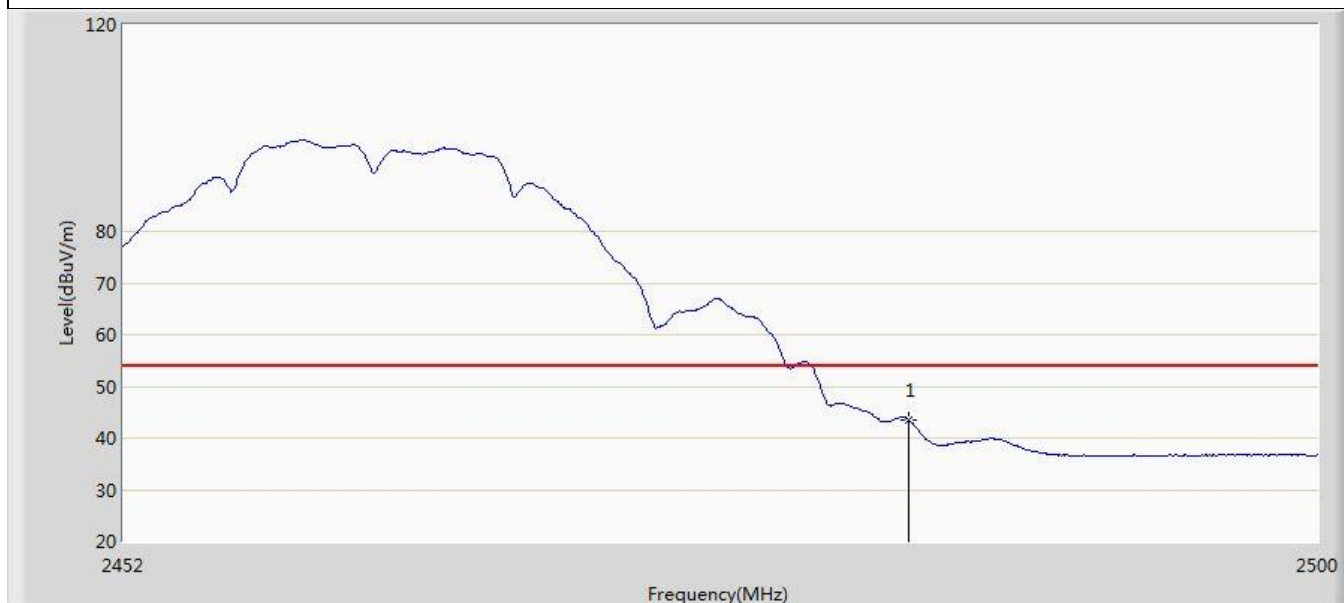


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	43.395	8.939	-10.605	54.000	34.456	AV

Profile: 2430820R	Page No.: 6
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2462MHz by 802.11b Ant 1	

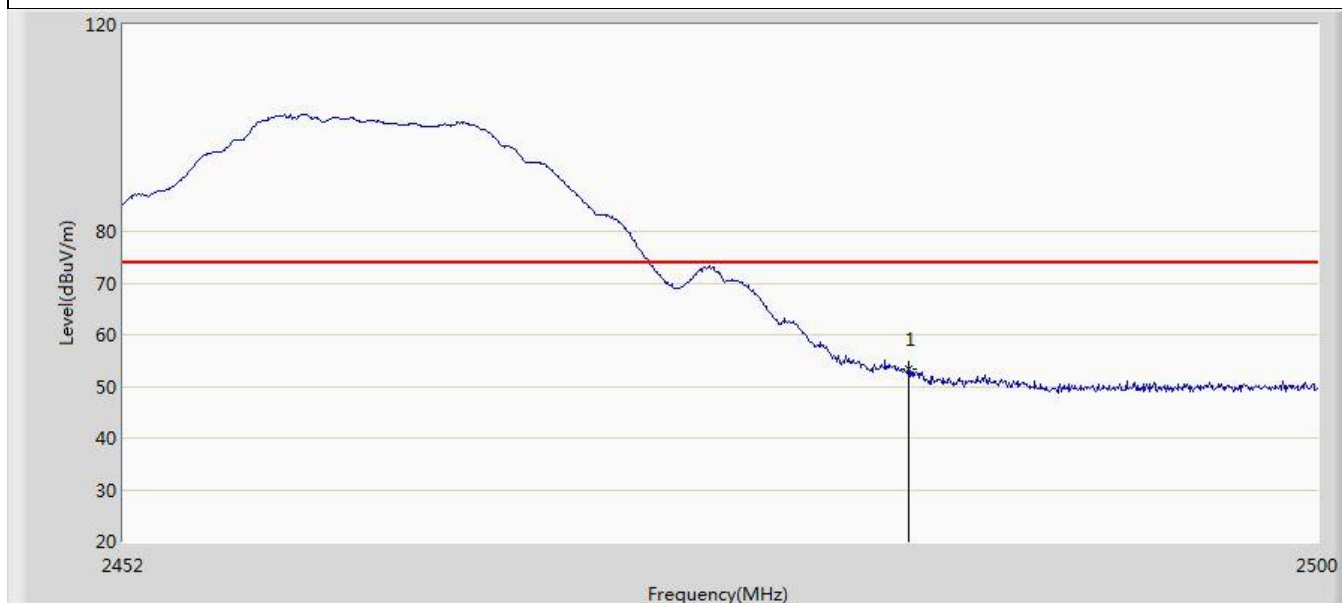


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.401	18.945	-20.599	74.000	34.456	PK

Profile: 2430820R	Page No.: 7
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2462MHz by 802.11b Ant 1	

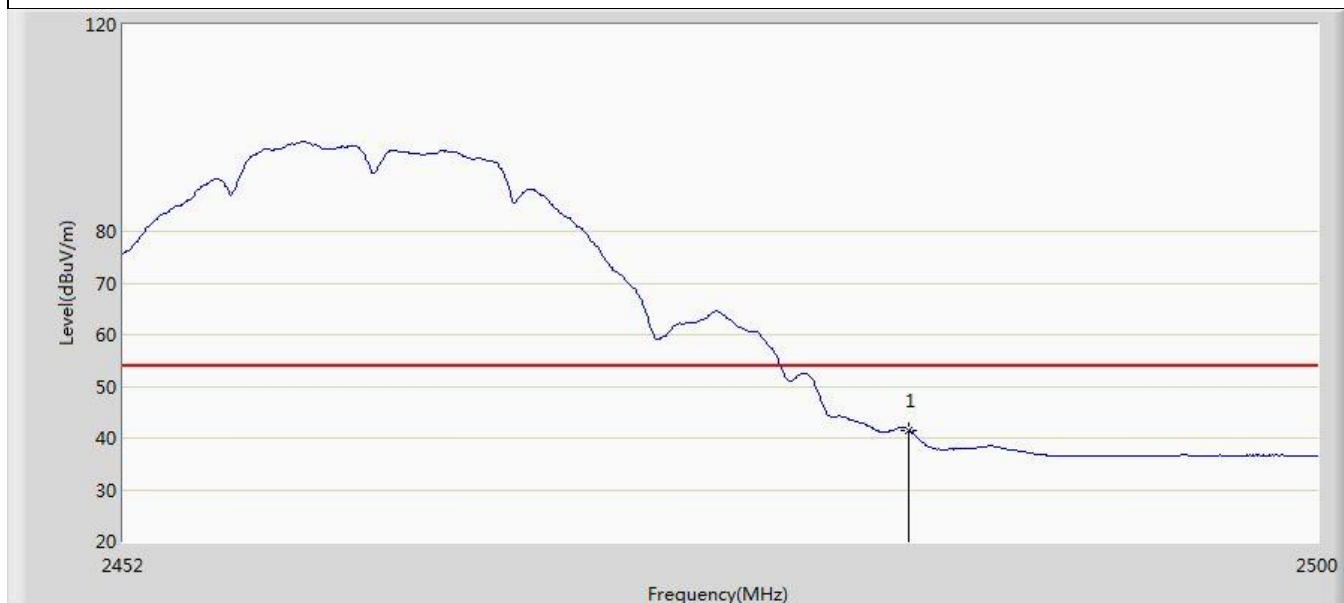


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	41.466	7.010	-12.534	54.000	34.456	AV

Profile: 2430820R	Page No.: 8
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 1 : Transmit at 2462MHz by 802.11b Ant 1	

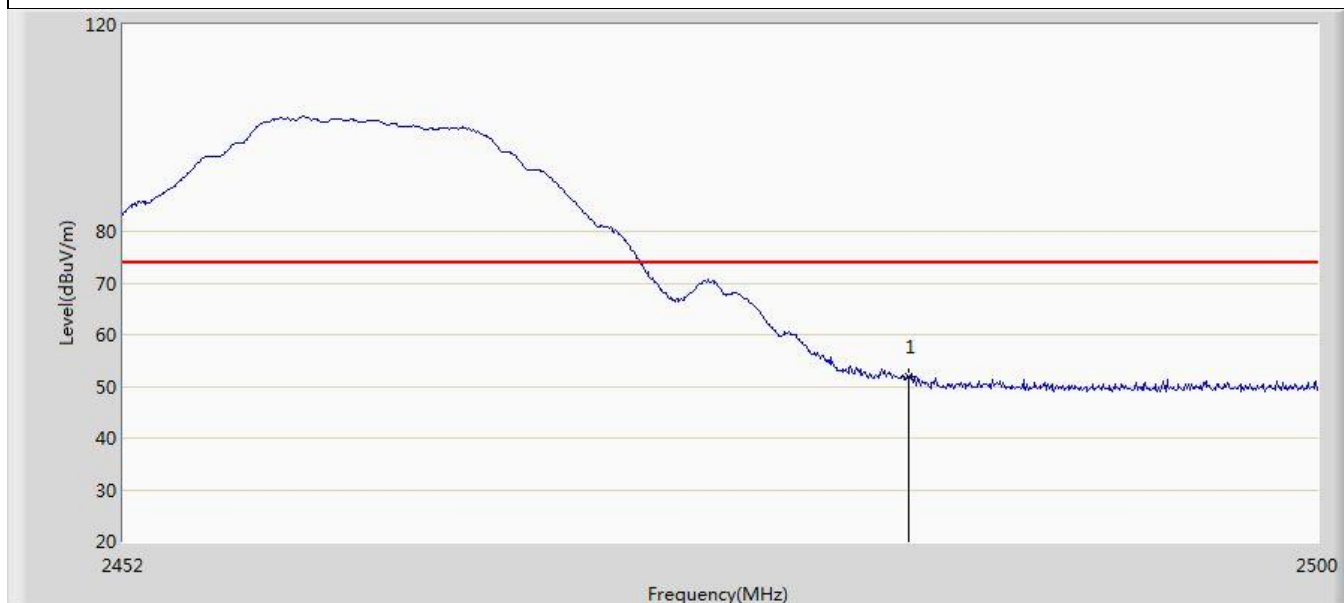


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.761	17.305	-22.239	74.000	34.456	PK

Profile: 2430820R	Page No.: 9
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2412MHz by 802.11g Ant 1	

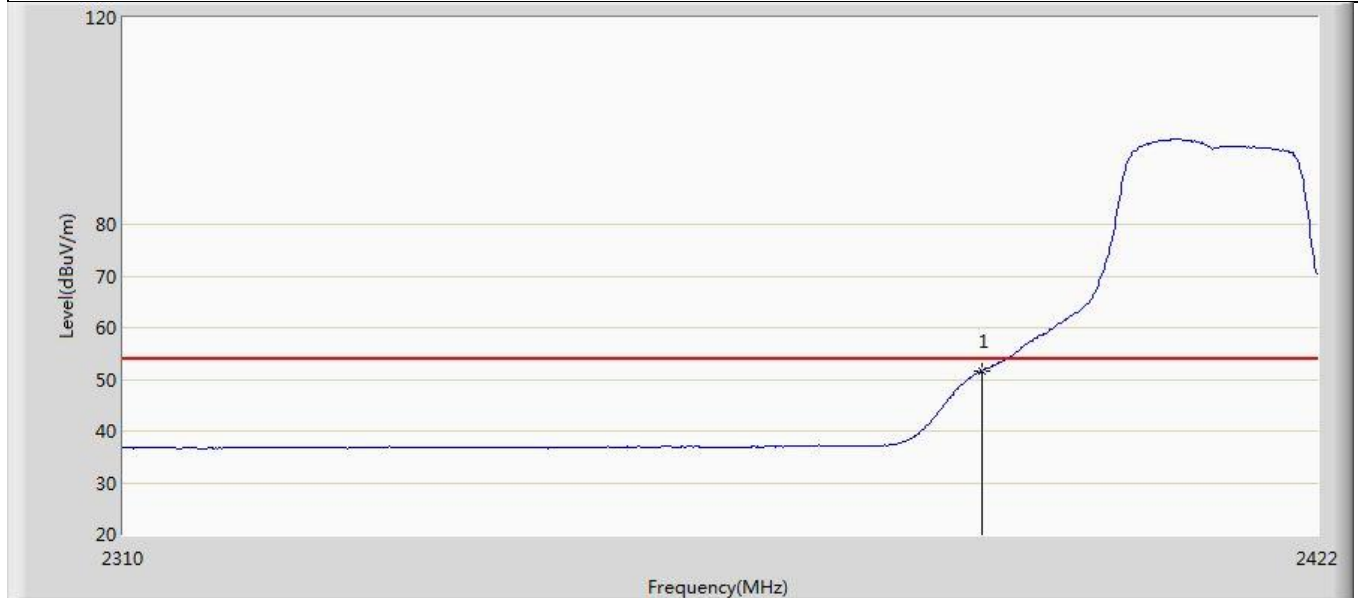


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	51.596	17.445	-2.404	54.000	34.151	AV

Profile: 2430820R	Page No.: 10
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2412MHz by 802.11g Ant 1	

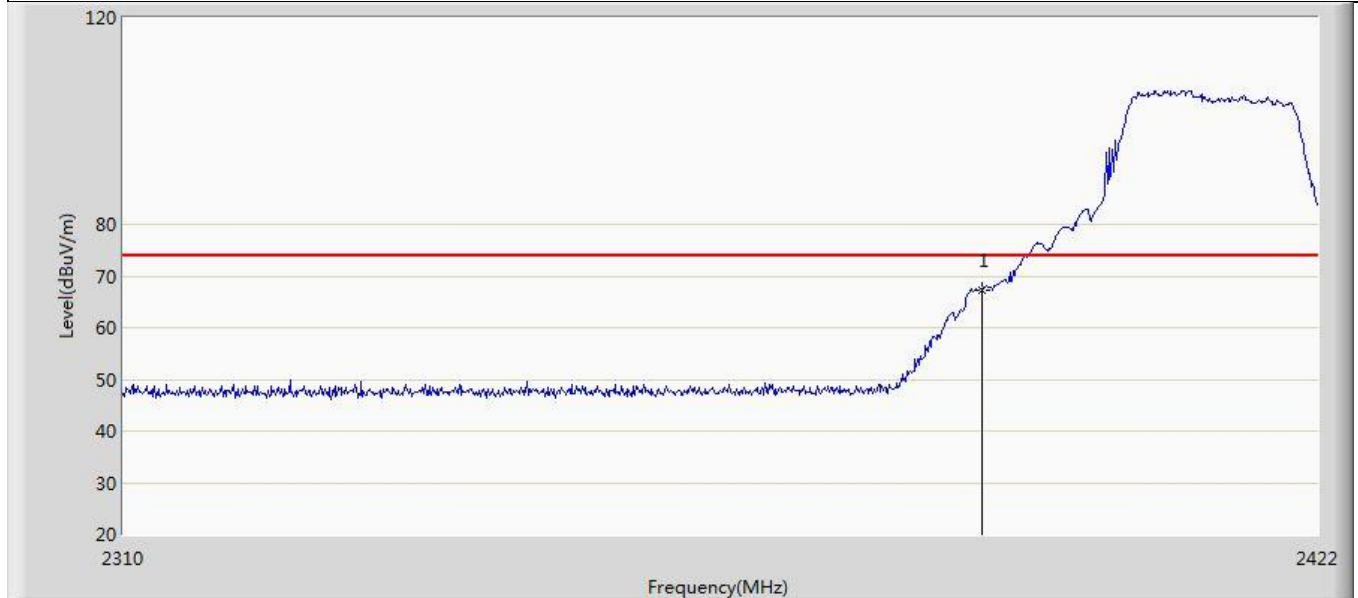


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	67.299	33.148	-6.701	74.000	34.151	PK

Profile: 2430820R	Page No.: 11
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2412MHz by 802.11g Ant 1	

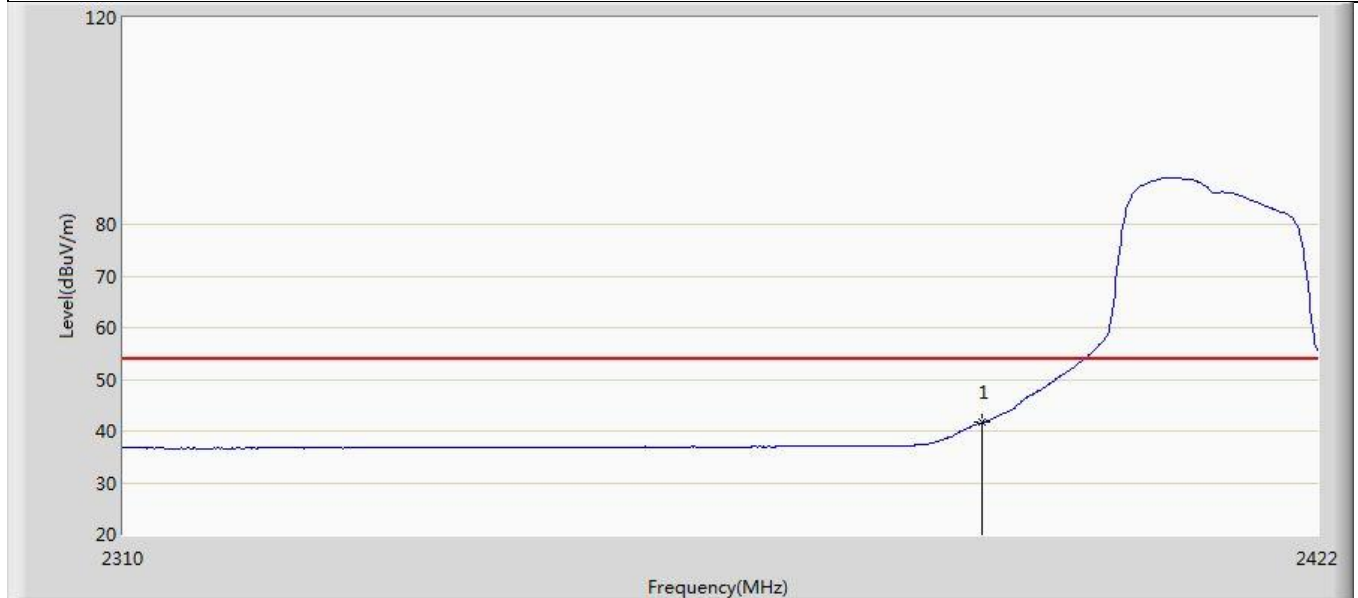


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	41.606	7.455	-12.394	54.000	34.151	AV

Profile: 2430820R	Page No.: 12
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2412MHz by 802.11g Ant 1	

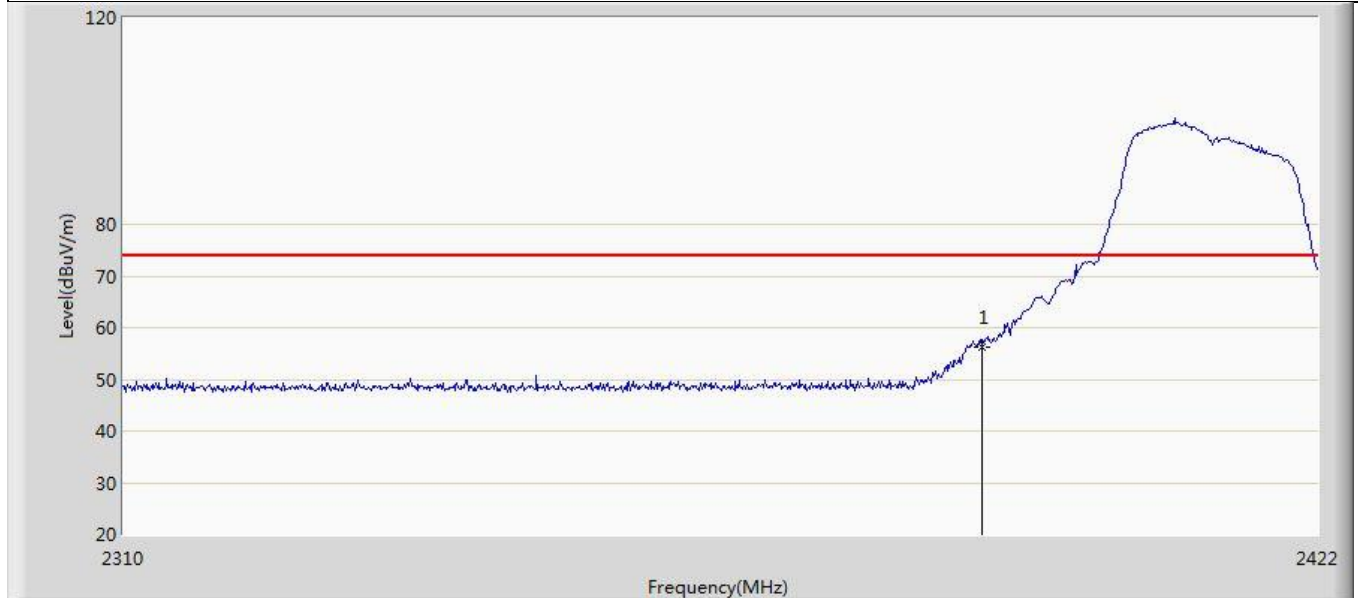


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	56.353	22.202	-17.647	74.000	34.151	PK

Profile: 2430820R	Page No.: 13
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2462MHz by 802.11g Ant 1	

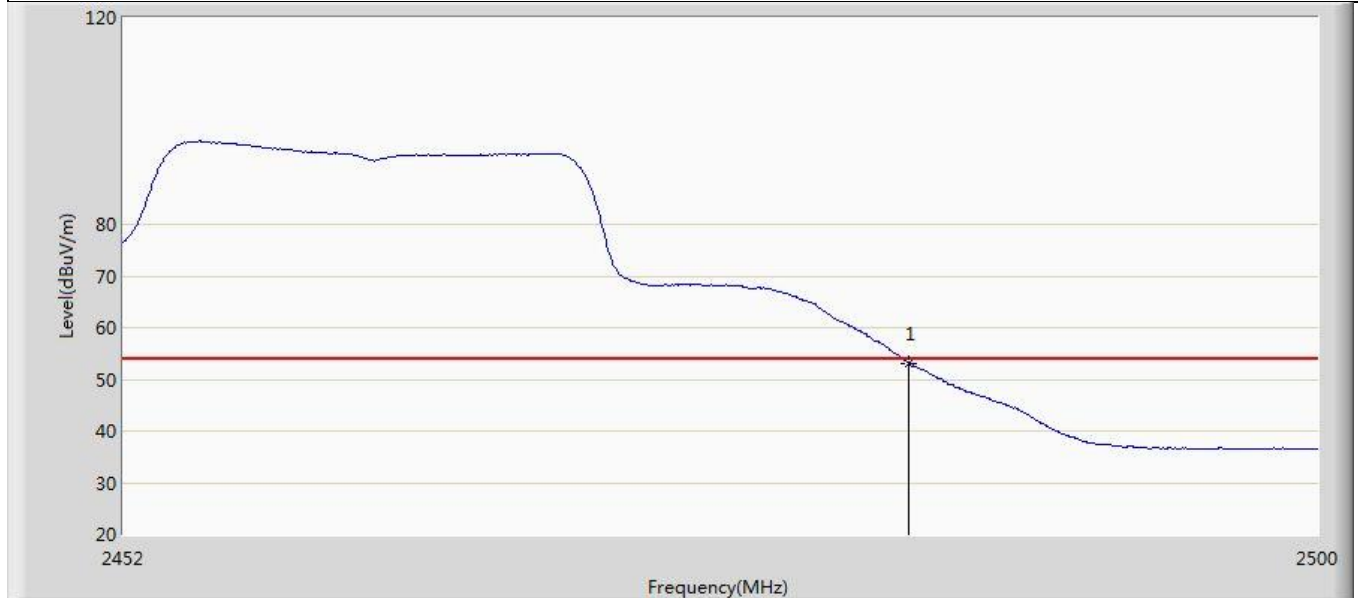


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	53.174	18.718	-0.826	54.000	34.456	AV

Profile: 2430820R	Page No.: 14
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2462MHz by 802.11g Ant 1	

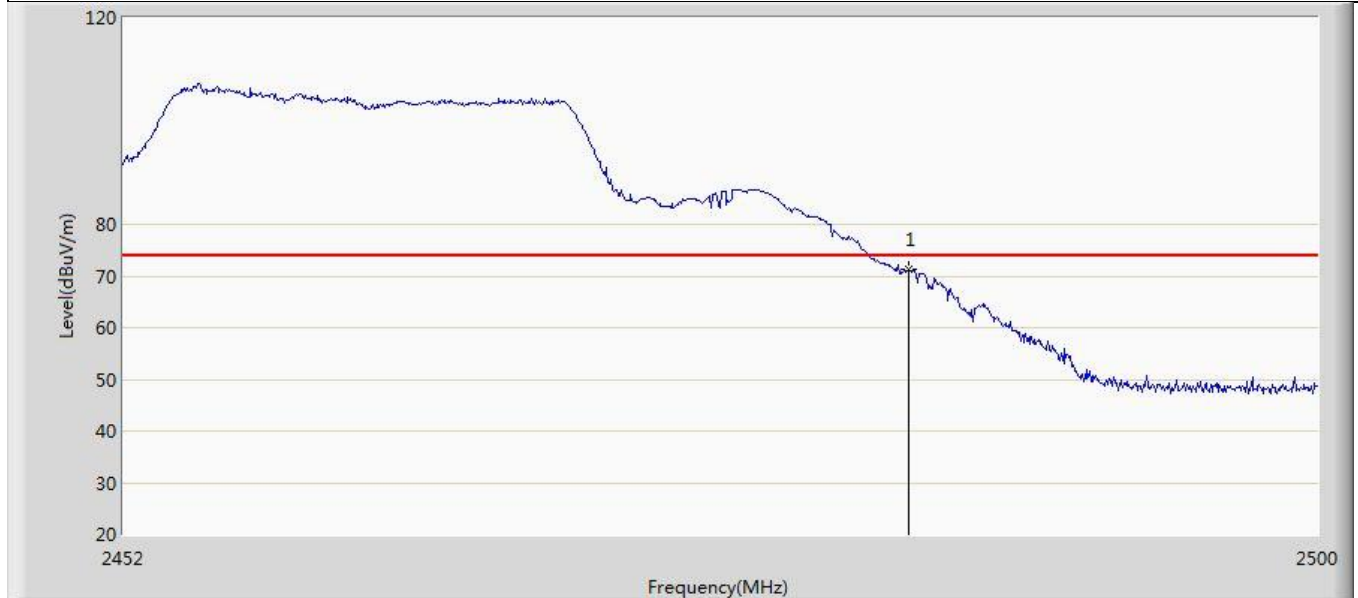


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	71.252	36.796	-2.748	74.000	34.456	PK

Profile: 2430820R	Page No.: 15
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2462MHz by 802.11g Ant 1	

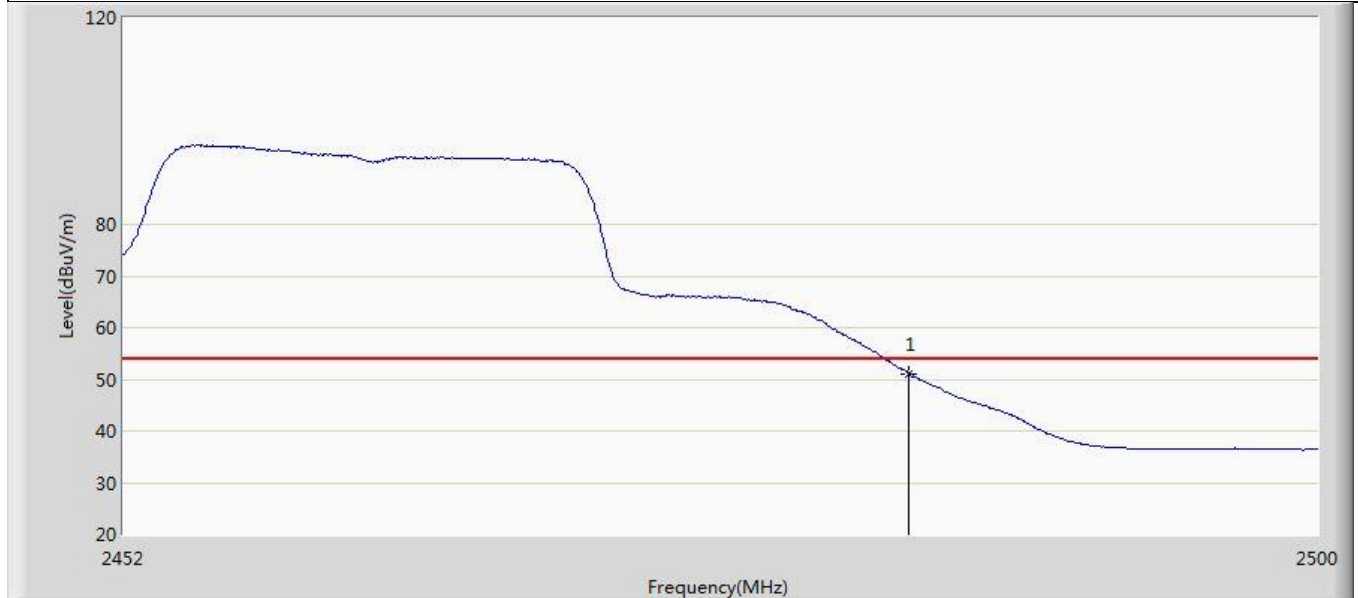


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.149	16.693	-2.851	54.000	34.456	AV

Profile: 2430820R	Page No.: 16
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 2 : Transmit at 2462MHz by 802.11g Ant 1	

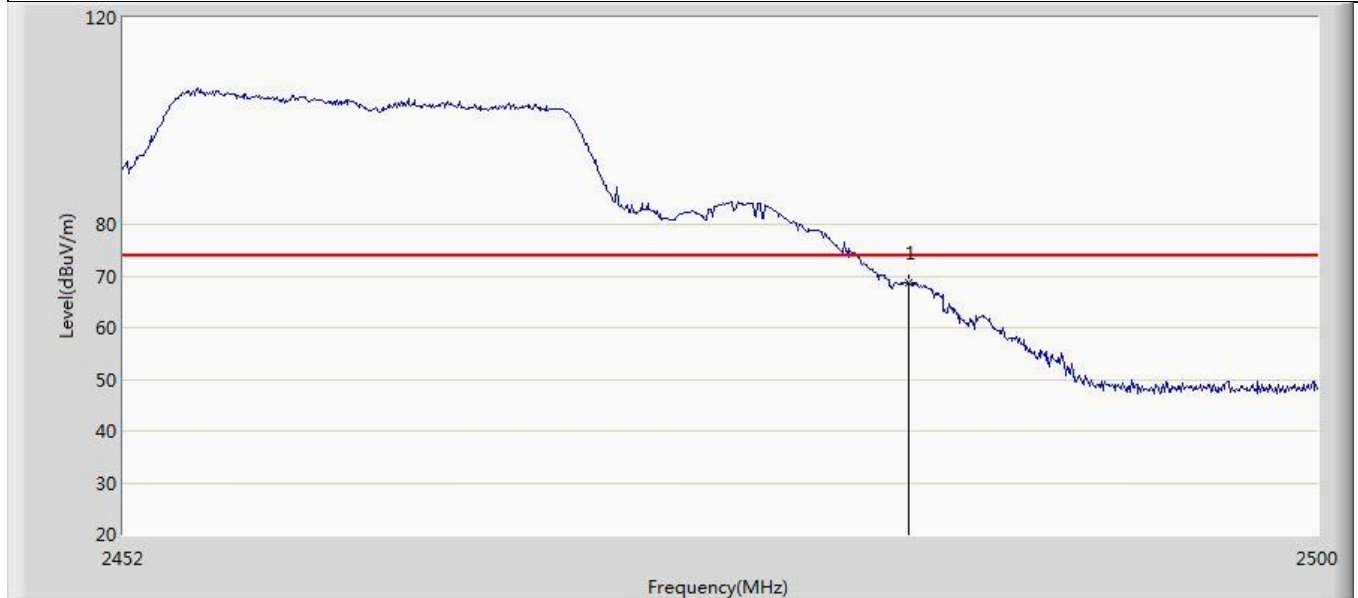


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	68.651	34.195	-5.349	74.000	34.456	PK

Profile: 2430820R	Page No.: 17
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 21:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) Ant 1	

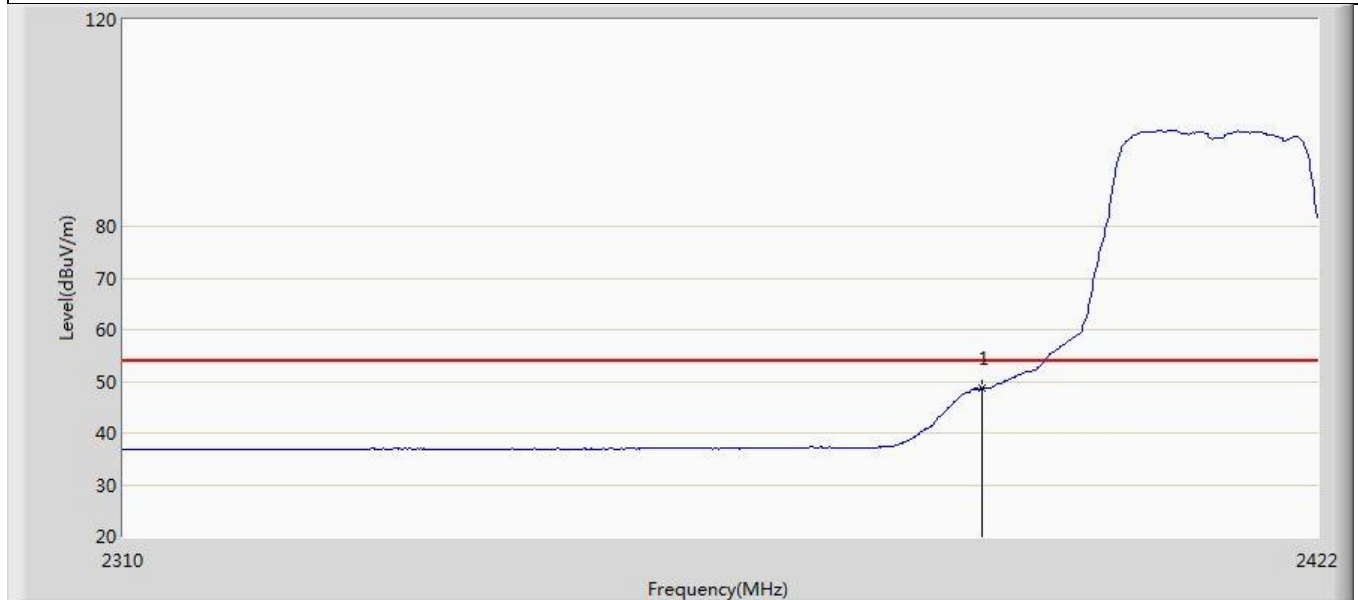


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.660	14.509	-5.340	54.000	34.151	AV

Profile: 2430820R	Page No.: 18
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) Ant 1	

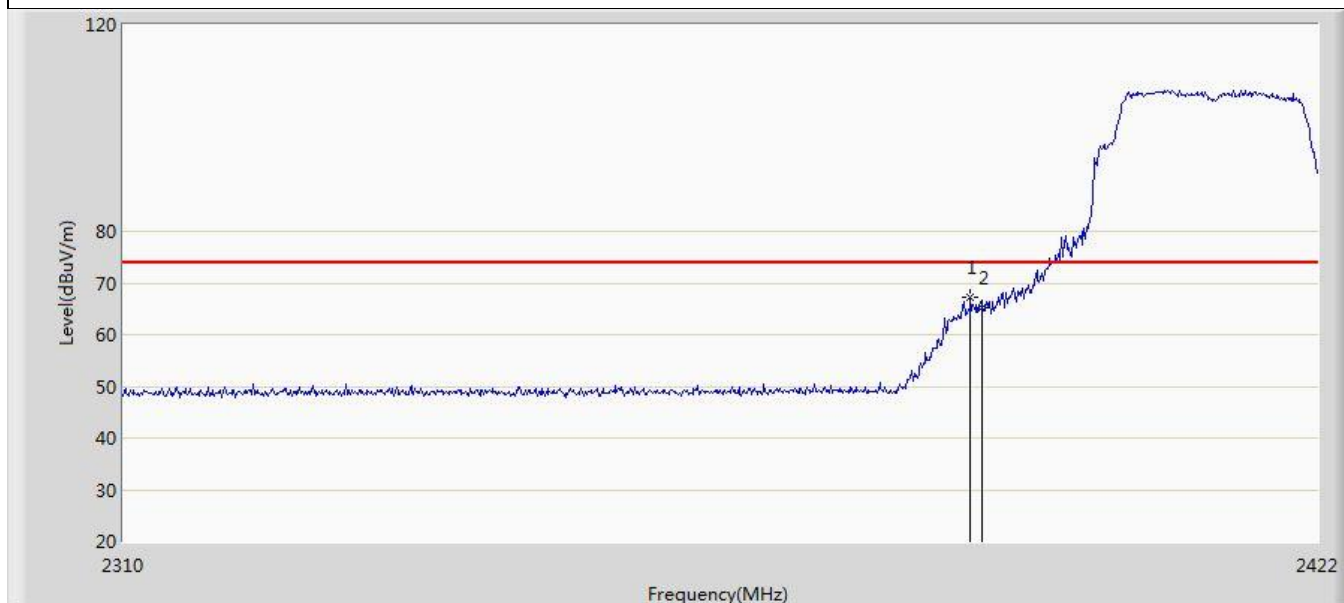


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2388.960	67.260	33.114	-6.740	74.000	34.146	PK
2		2390.000	65.097	30.946	-8.903	74.000	34.151	PK

Profile: 2430820R	Page No.: 19
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) Ant 1	

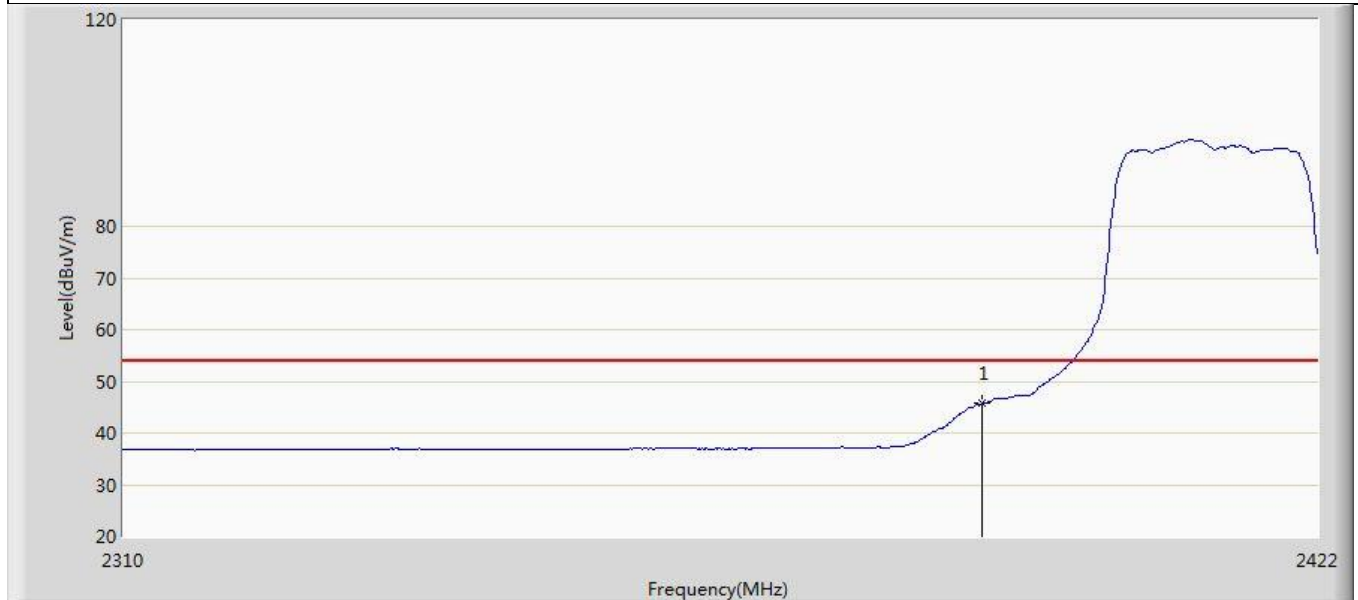


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.656	11.505	-8.344	54.000	34.151	AV

Profile: 2430820R	Page No.: 20
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2412MHz by 802.11n(20MHz) Ant 1	

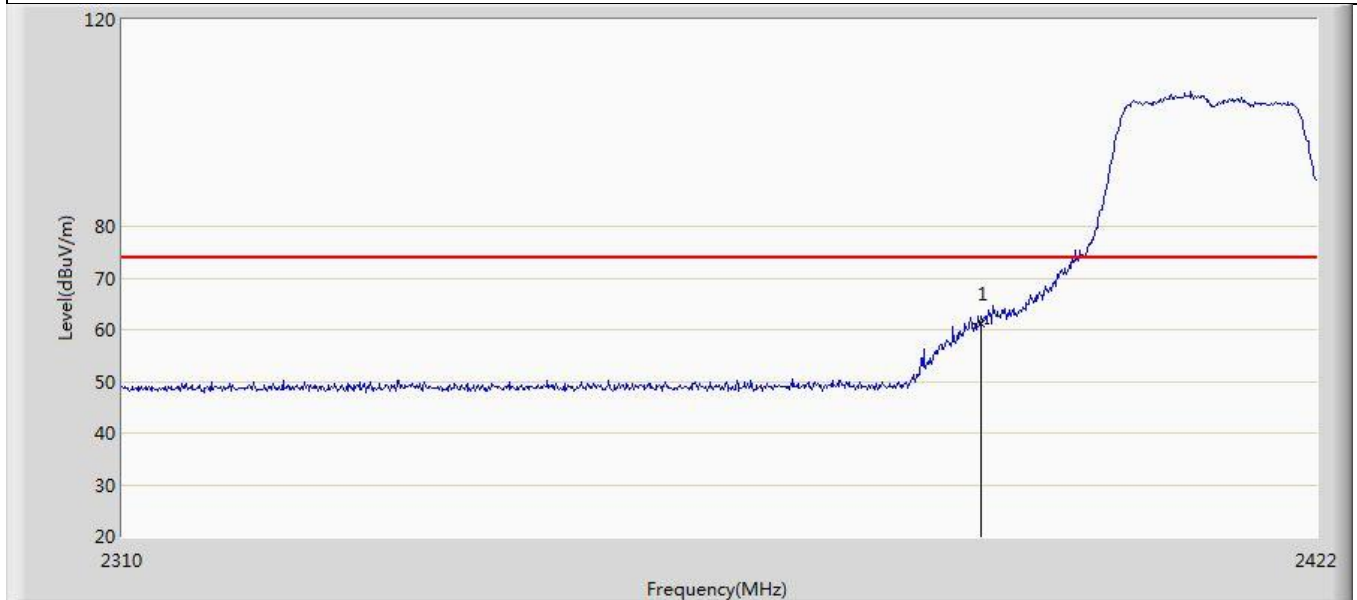


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	61.098	26.947	-12.902	74.000	34.151	PK

Profile: 2430820R	Page No.: 21
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) Ant 1	

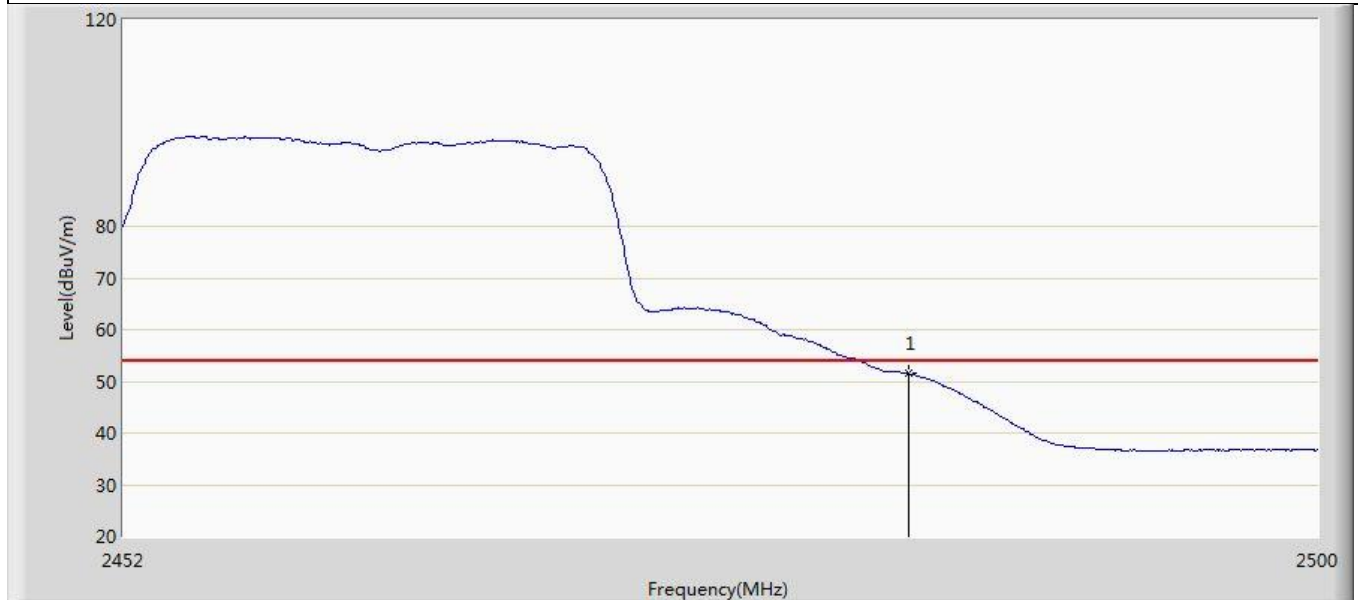


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.466	17.010	-2.534	54.000	34.456	AV

Profile: 2430820R	Page No.: 22
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) Ant 1	

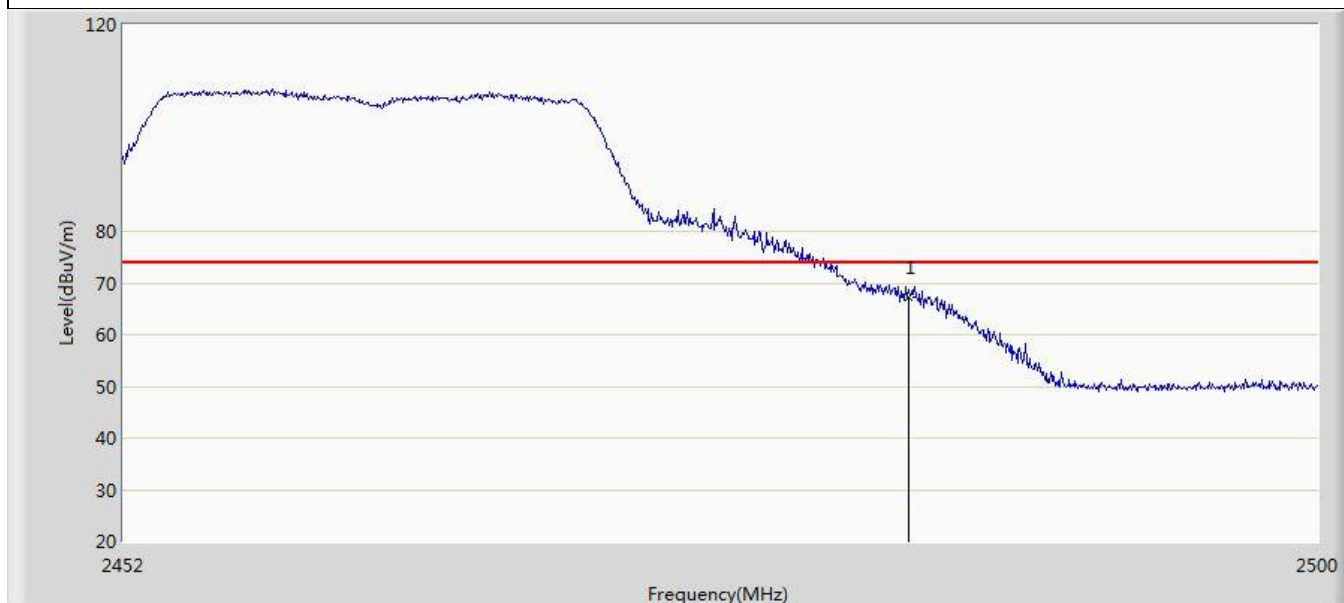


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	67.287	32.831	-6.713	74.000	34.456	PK

Profile: 2430820R	Page No.: 23
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) Ant 1	

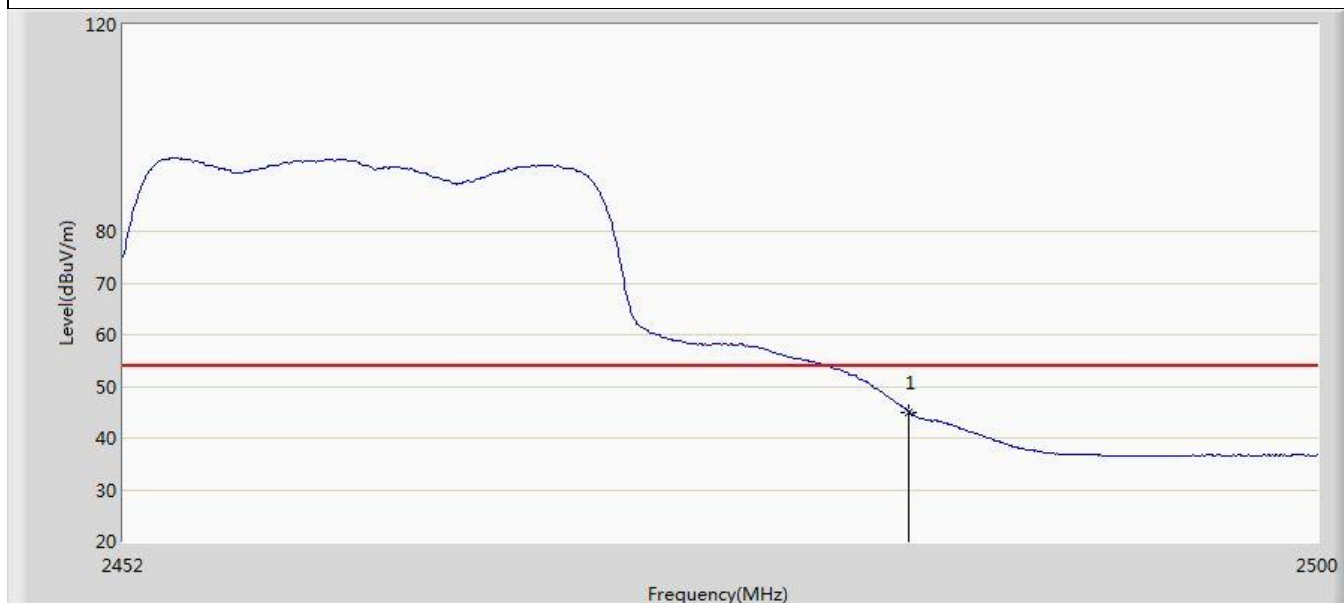


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	45.024	10.568	-8.976	54.000	34.456	AV

Profile: 2430820R	Page No.: 24
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 3 : Transmit at 2462MHz by 802.11n(20MHz) Ant 1	

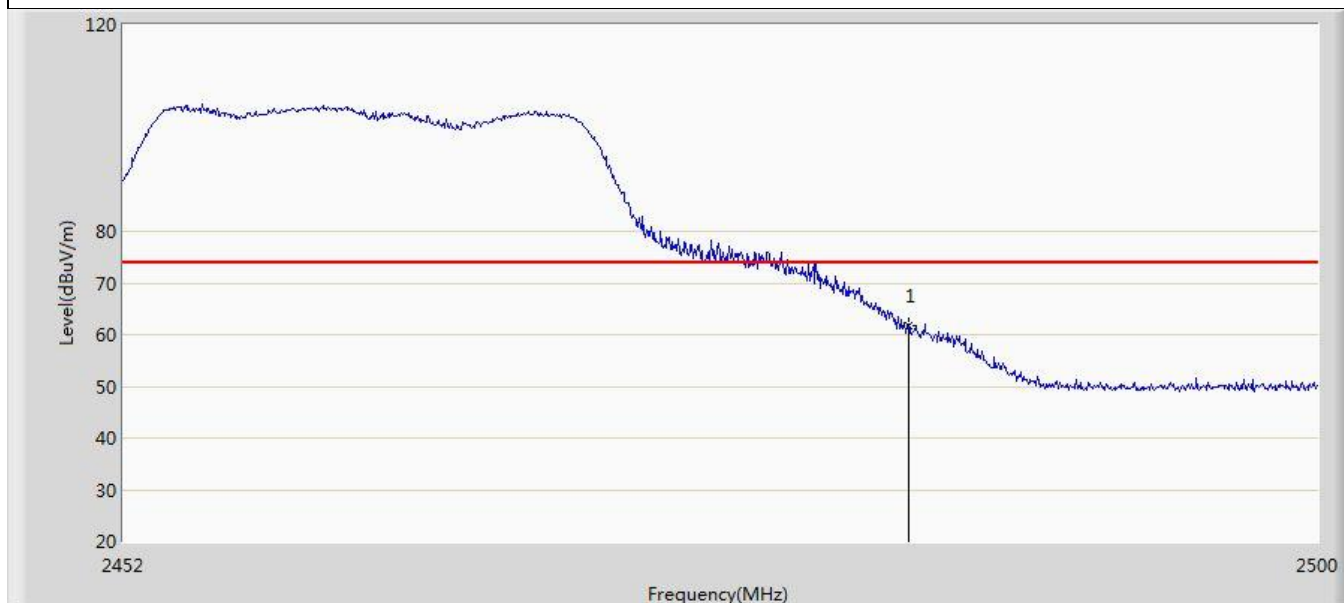


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	61.691	27.235	-12.309	74.000	34.456	PK

Profile: 2430820R	Page No.: 25
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) Ant 1	

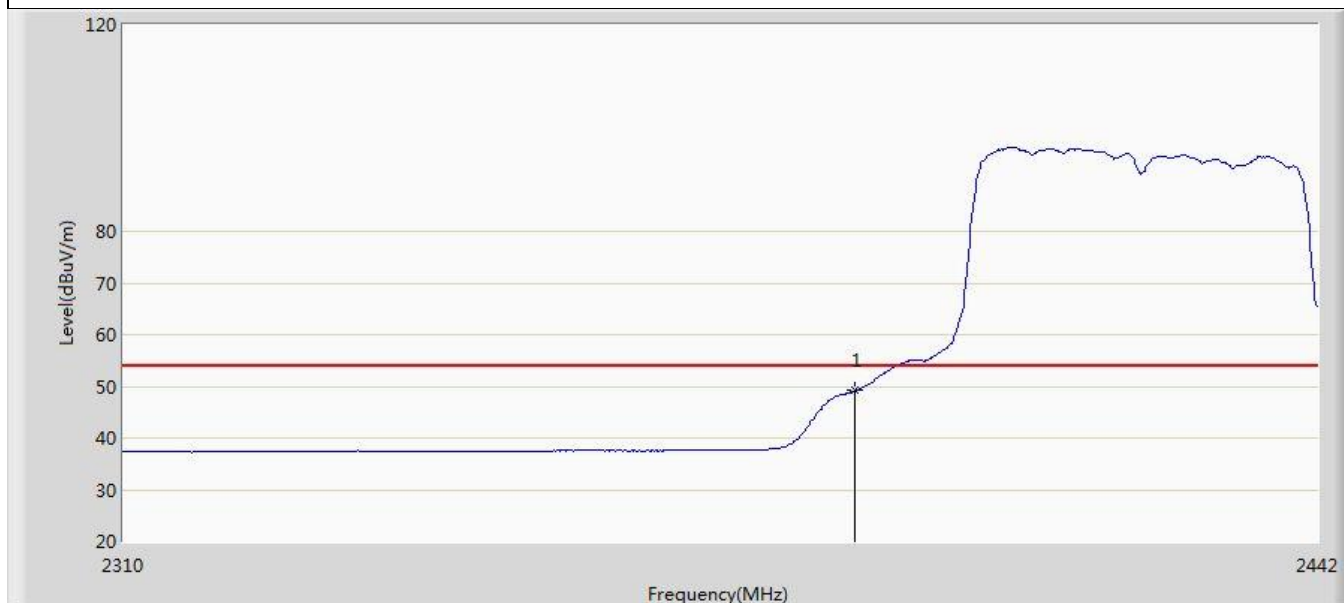


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.154	15.003	-4.846	54.000	34.151	AV

Profile: 2430820R	Page No.: 26
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) Ant 1	

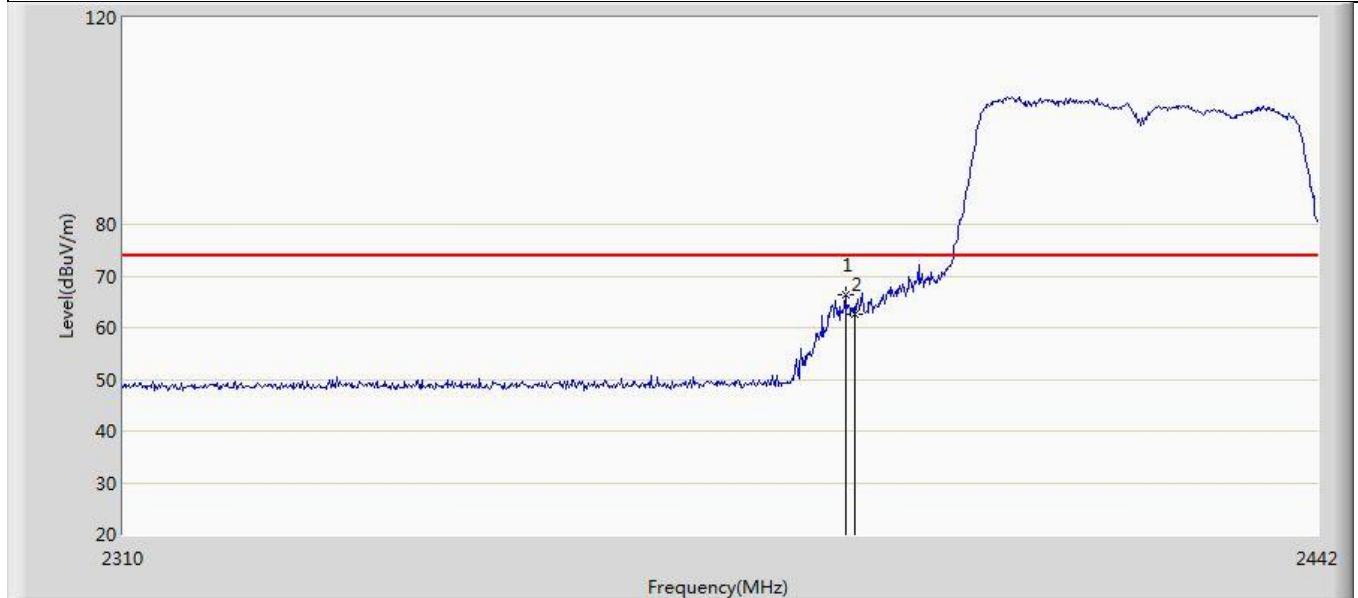


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2388.936	66.283	32.137	-7.717	74.000	34.146	PK
2		2390.000	62.632	28.481	-11.368	74.000	34.151	PK

Profile: 2430820R	Page No.: 27
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) Ant 1	

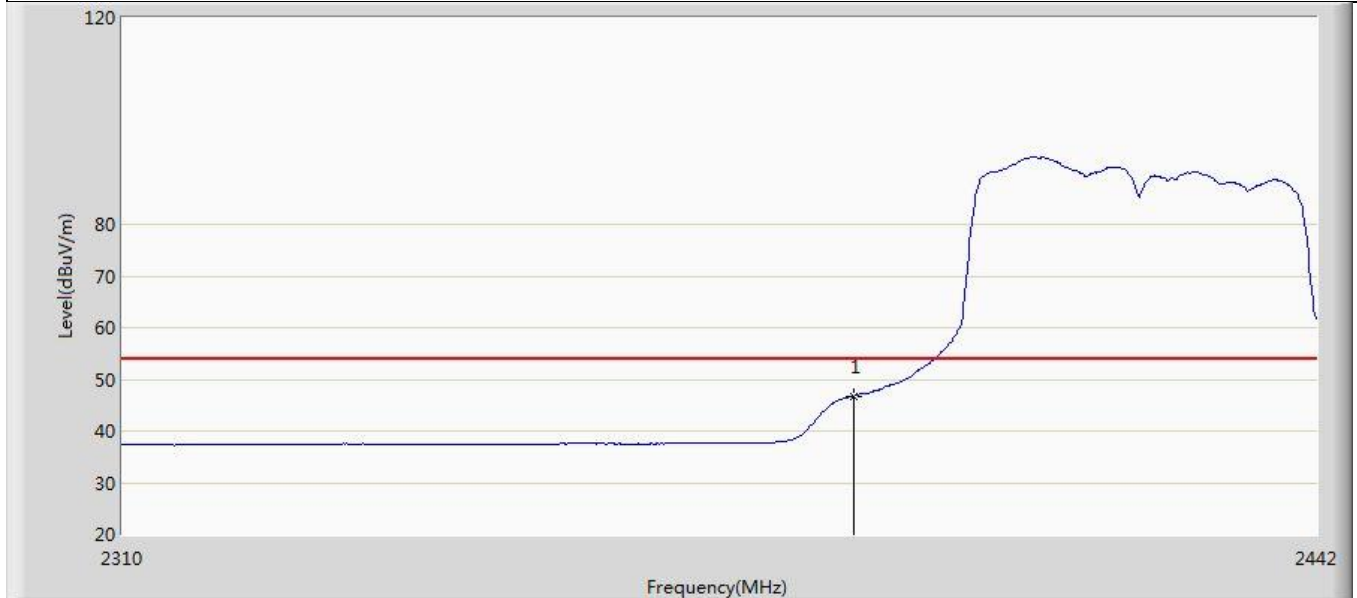


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	46.799	12.648	-7.201	54.000	34.151	AV

Profile: 2430820R	Page No.: 28
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2422MHz by 802.11n(40MHz) Ant 1	

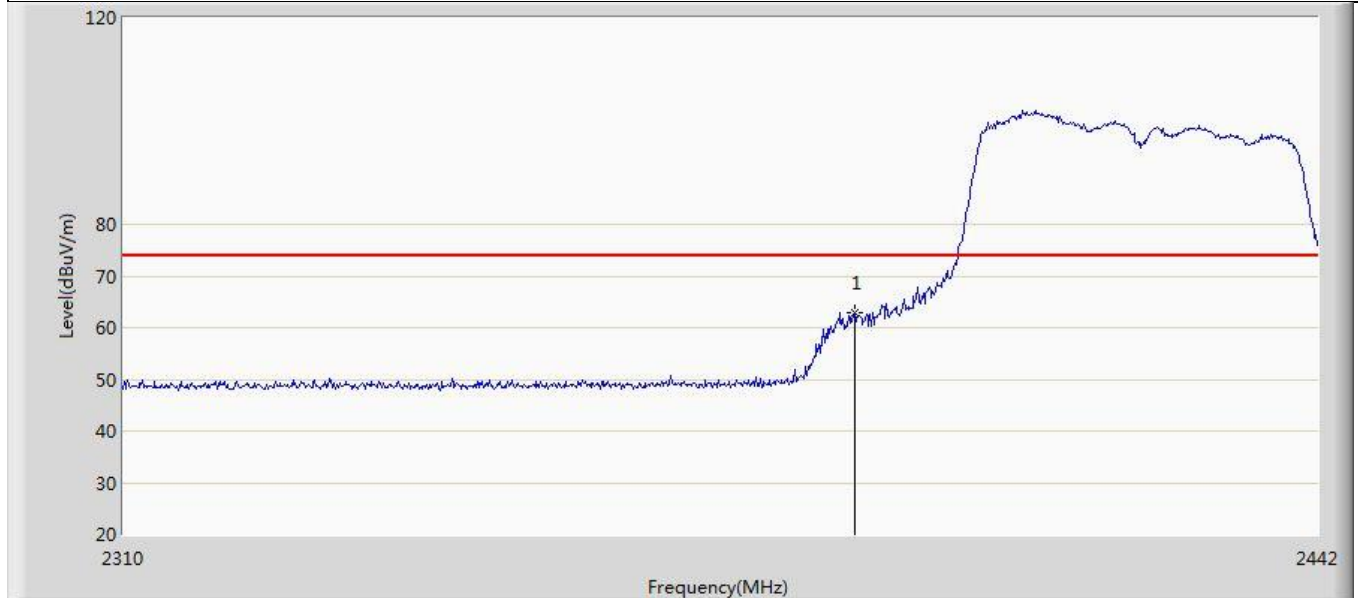

No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	62.844	28.693	-11.156	74.000	34.151	PK

Profile: 2430820R	Page No.: 29
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) Ant 1	

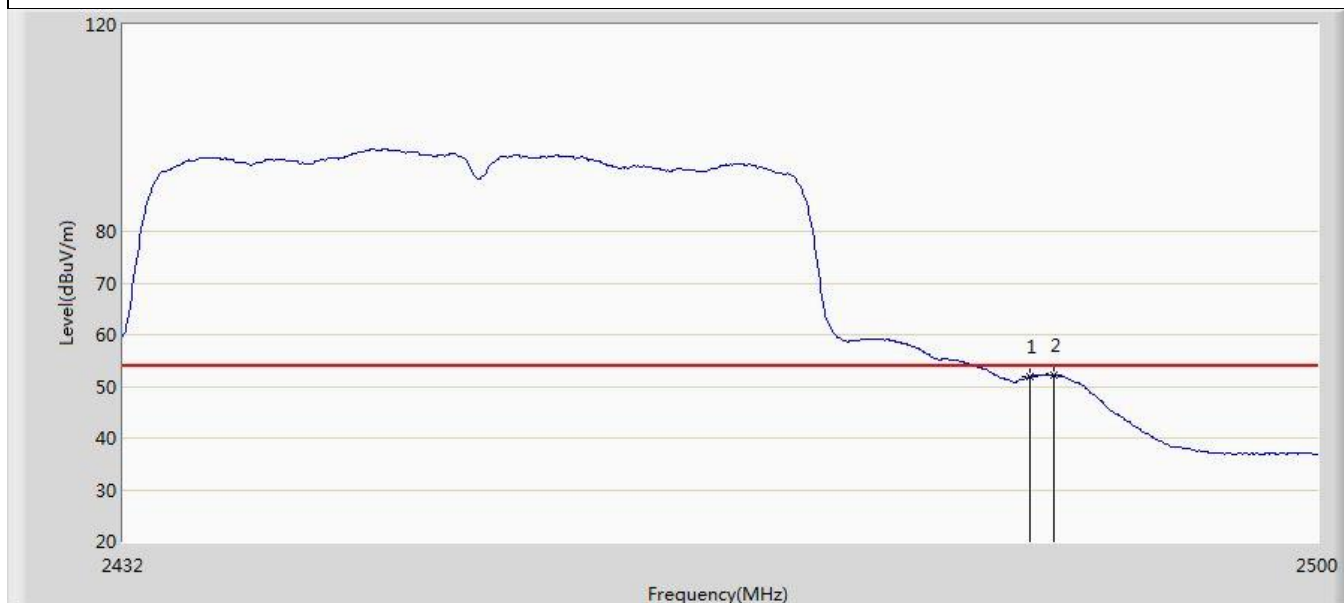


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	51.924	17.468	-2.076	54.000	34.456	AV
2	*	2484.836	52.082	17.611	-1.918	54.000	34.470	AV

Profile: 2430820R	Page No.: 30
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) Ant 1	



No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	66.286	31.830	-7.714	74.000	34.456	PK
2	*	2484.768	69.276	34.806	-4.724	74.000	34.470	PK

Profile: 2430820R	Page No.: 31
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) Ant 1	

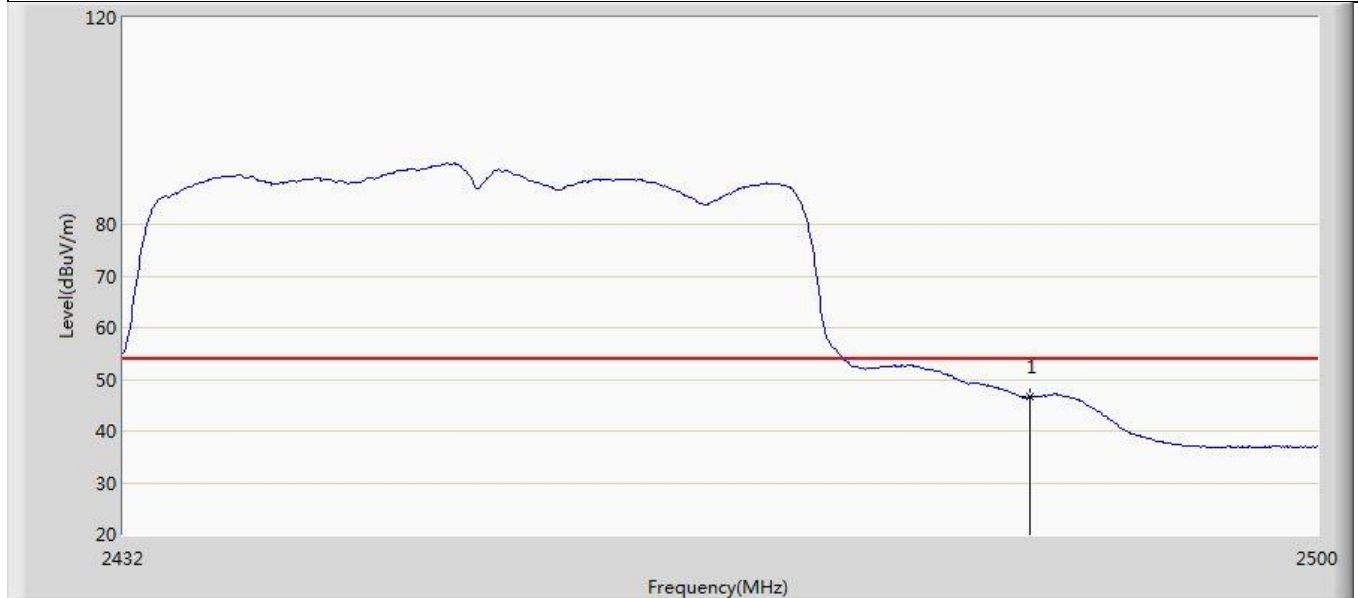


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.612	12.156	-7.388	54.000	34.456	AV

Profile: 2430820R	Page No.: 32
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 4 : Transmit at 2452MHz by 802.11n(40MHz) Ant 1	




No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	60.967	26.511	-13.033	74.000	34.456	PK
2	*	2485.108	62.501	28.027	-11.499	74.000	34.473	PK

Profile: 2430820R	Page No.: 33
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2412MHz by 802.11ac(20MHz) Ant 1	

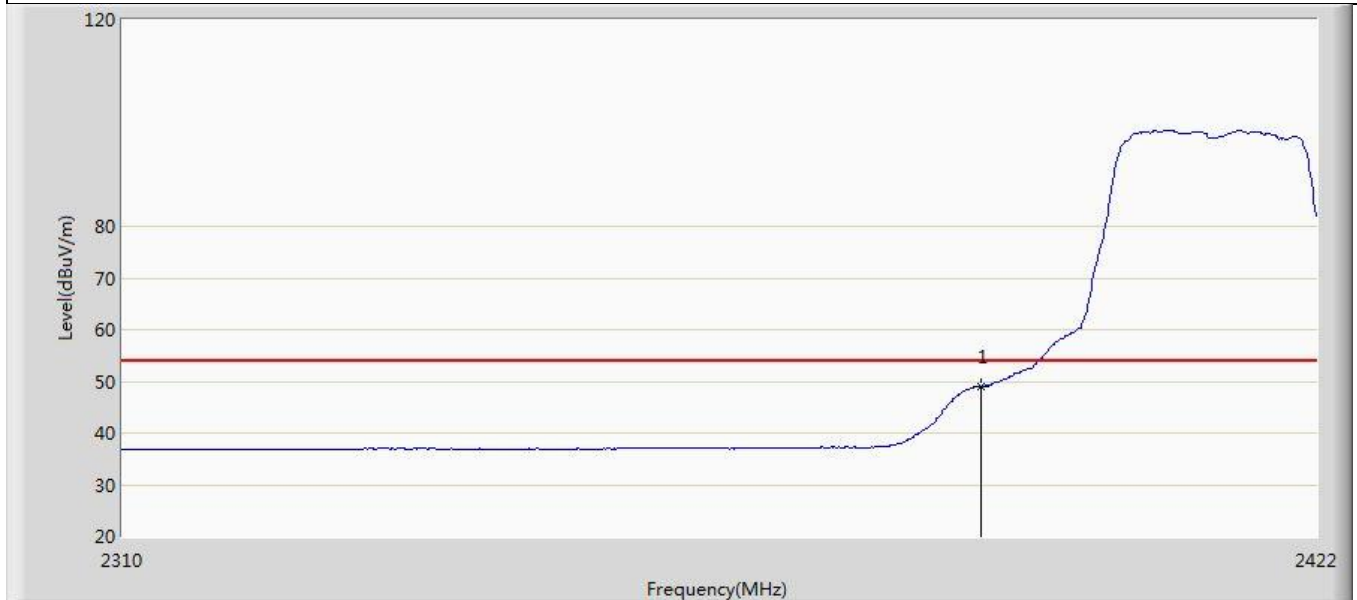


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.088	14.937	-4.912	54.000	34.151	AV

Profile: 2430820R	Page No.: 34
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2412MHz by 802.11ac(20MHz) Ant 1	

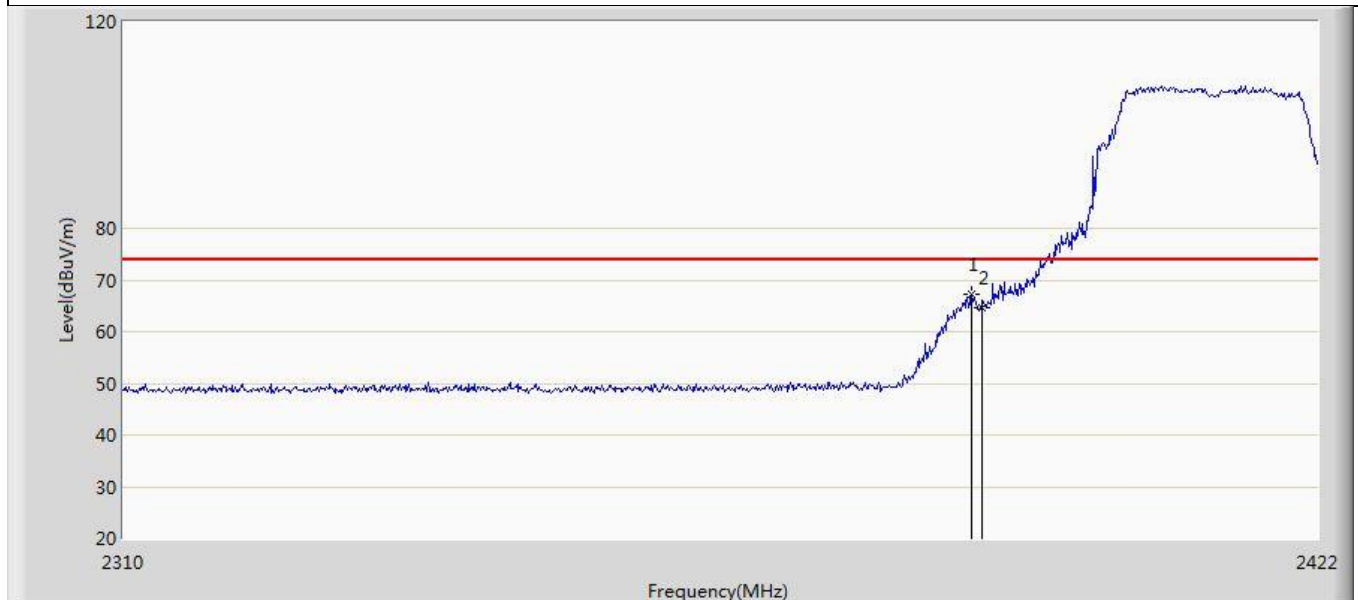


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2389.072	67.113	32.966	-6.887	74.000	34.147	PK
2		2390.000	64.701	30.550	-9.299	74.000	34.151	PK

Profile: 2430820R	Page No.: 35
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2412MHz by 802.11ac(20MHz) Ant 1	

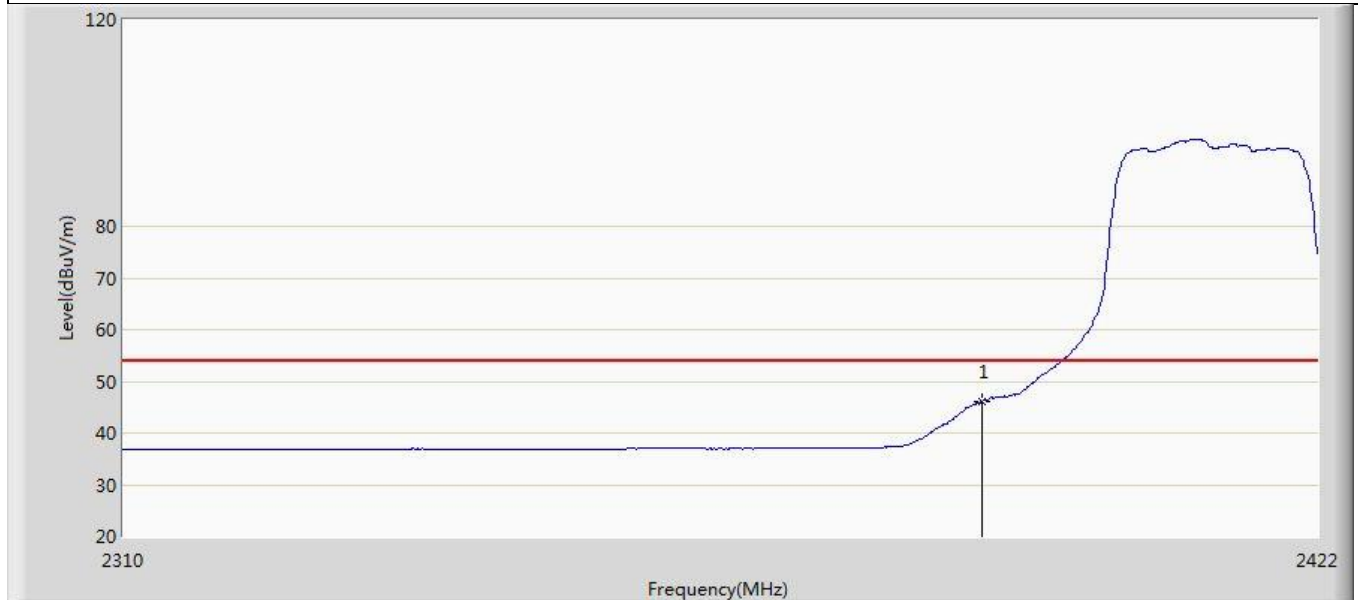


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	46.097	11.946	-7.903	54.000	34.151	AV

Profile: 2430820R	Page No.: 36
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2412MHz by 802.11ac(20MHz) Ant 1	

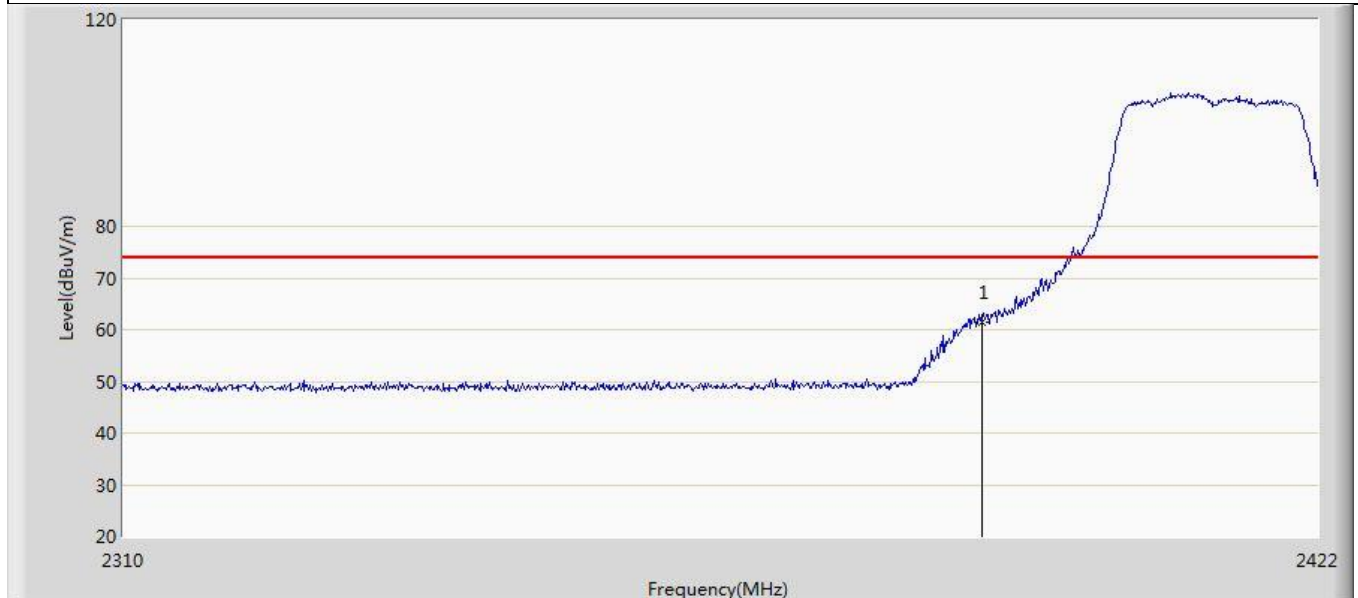


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	61.594	27.443	-12.406	74.000	34.151	PK

Profile: 2430820R	Page No.: 37
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2462MHz by 802.11ac(20MHz) Ant 1	

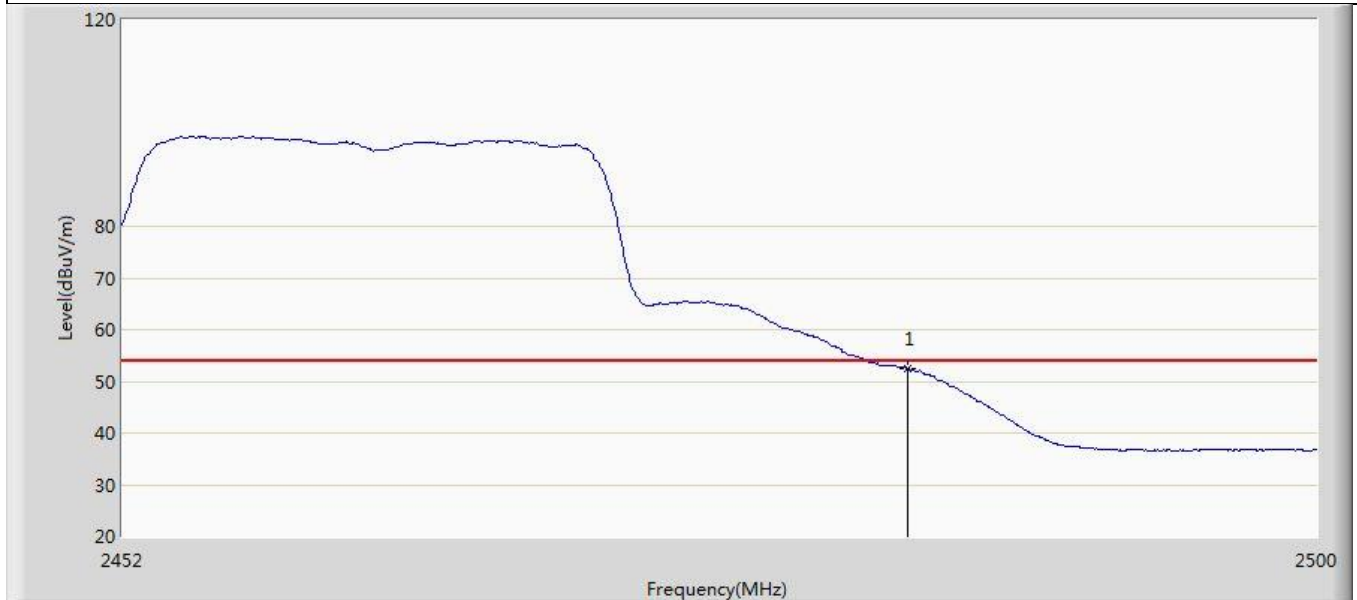


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.506	18.050	-1.494	54.000	34.456	AV

Profile: 2430820R	Page No.: 38
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2462MHz by 802.11ac(20MHz) Ant 1	

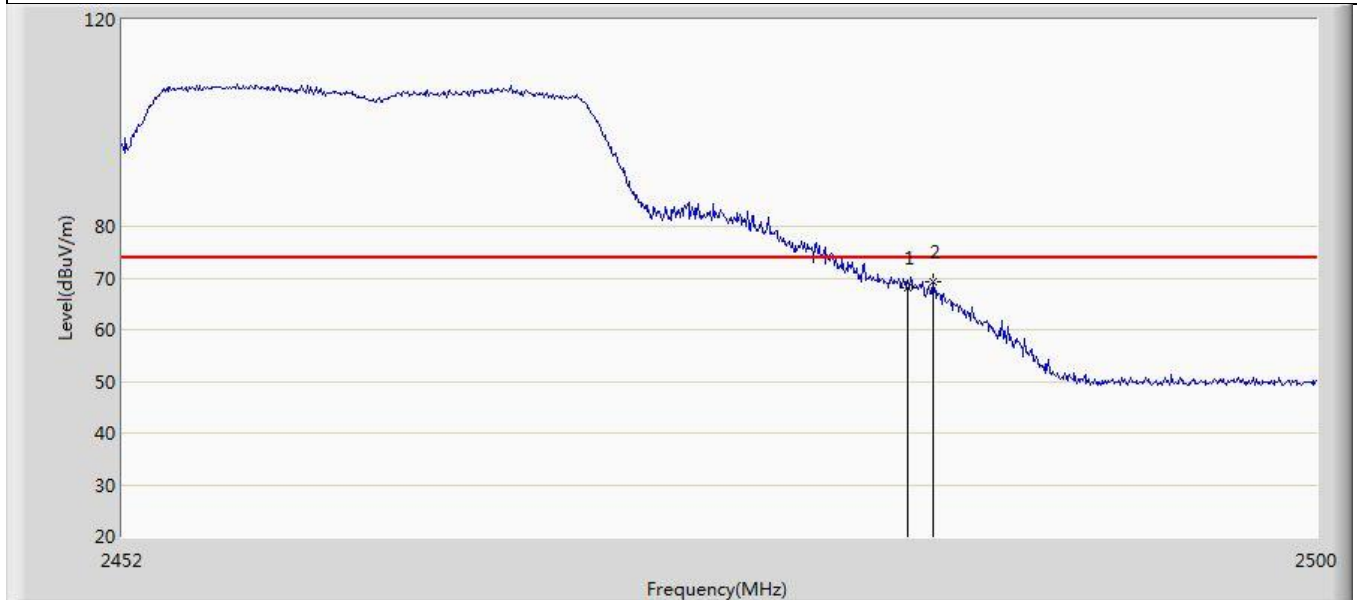


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	68.086	33.630	-5.914	74.000	34.456	PK
2	*	2484.496	69.403	34.936	-4.597	74.000	34.467	PK

Profile: 2430820R	Page No.: 39
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 22:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2462MHz by 802.11ac(20MHz) Ant 1	

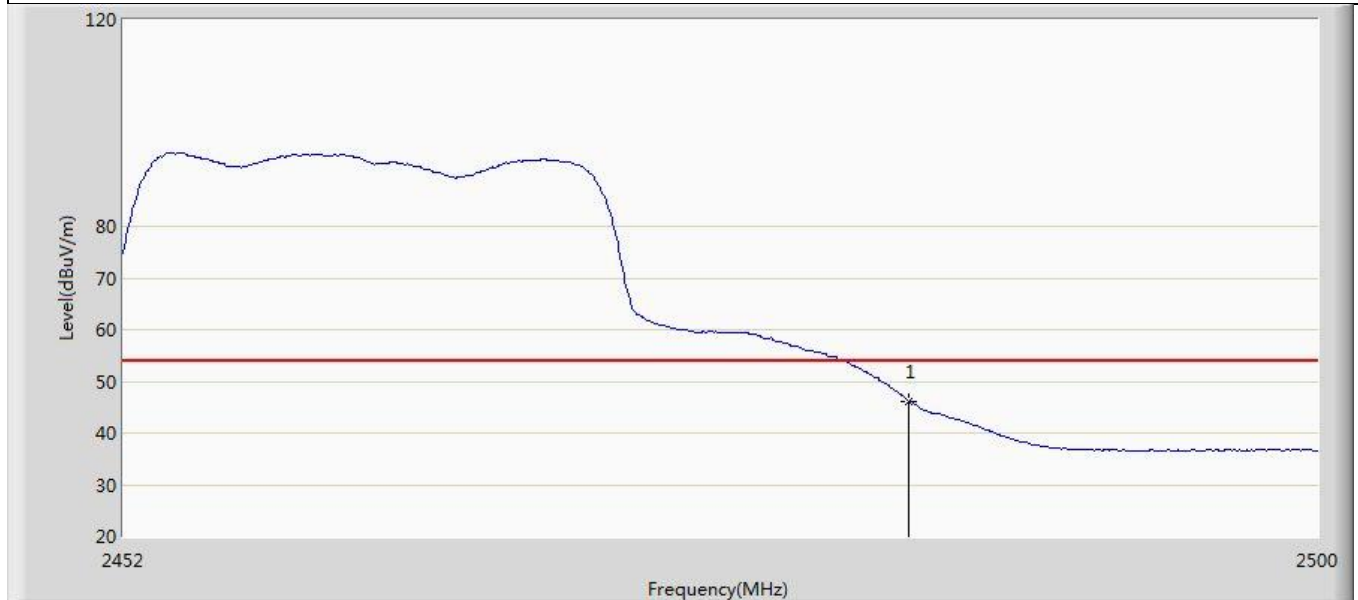


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.189	11.733	-7.811	54.000	34.456	AV

Profile: 2430820R	Page No.: 40
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 5 : Transmit at 2462MHz by 802.11ac(20MHz) Ant 1	

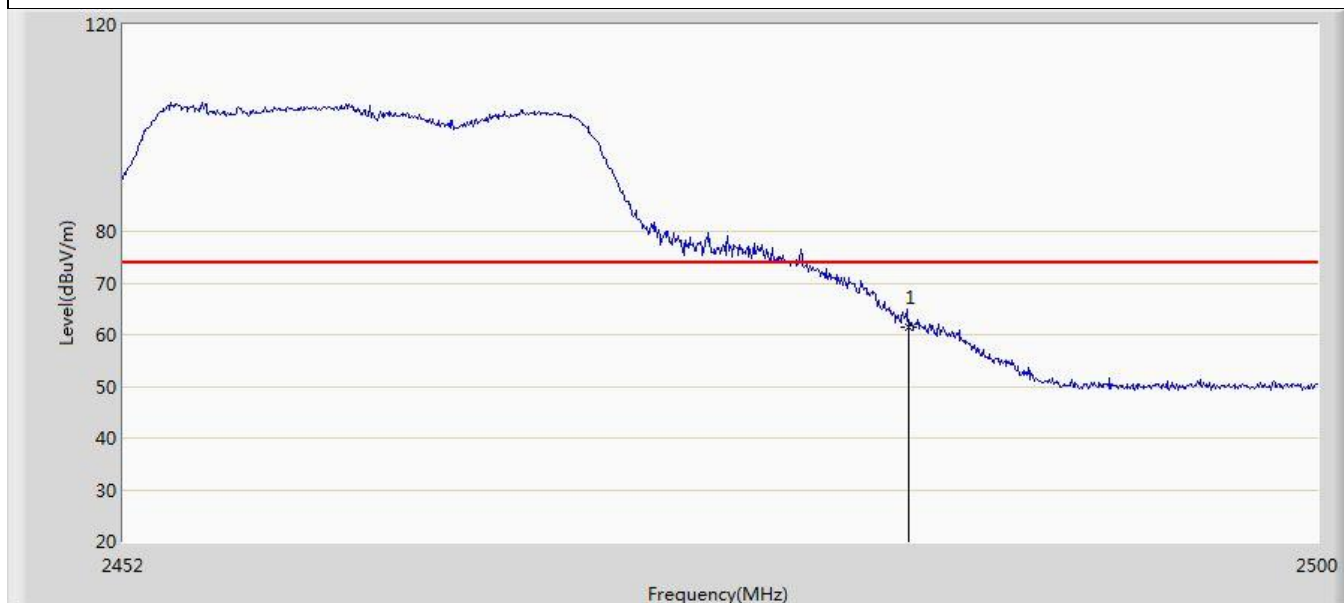


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	61.539	27.083	-12.461	74.000	34.456	PK

Profile: 2430820R	Page No.: 41
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2422MHz by 802.11ac(40MHz) Ant 1	

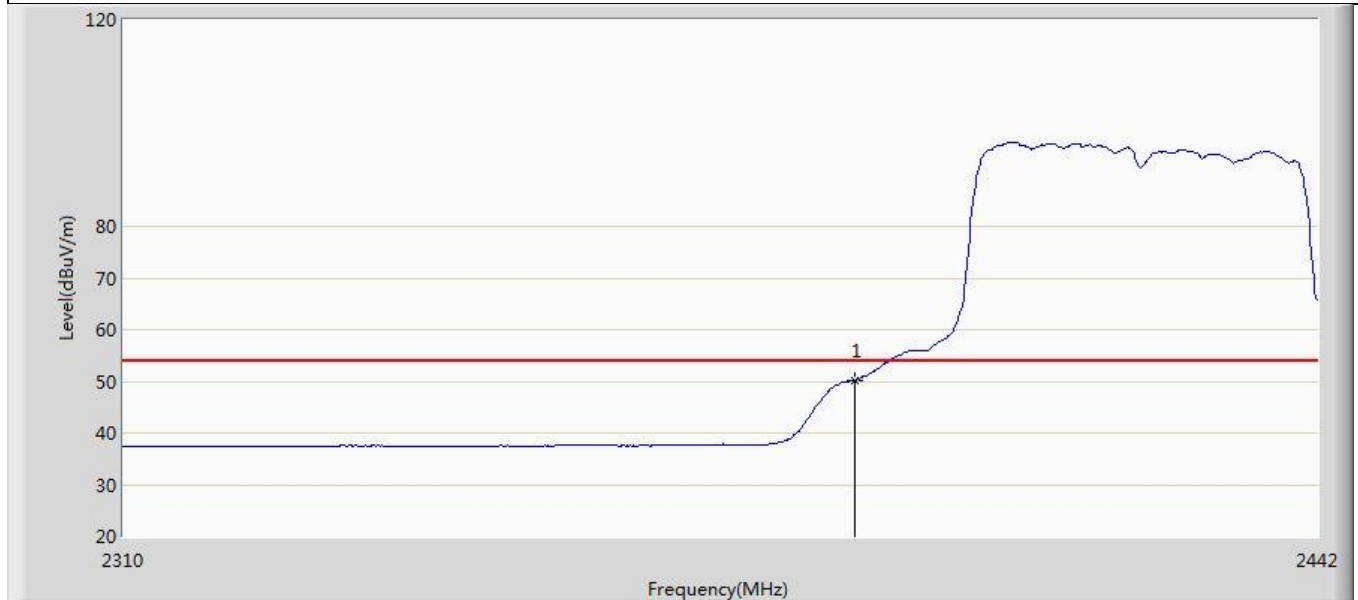


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.217	16.066	-3.783	54.000	34.151	AV

Profile: 2430820R	Page No.: 42
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2422MHz by 802.11ac(40MHz) Ant 1	

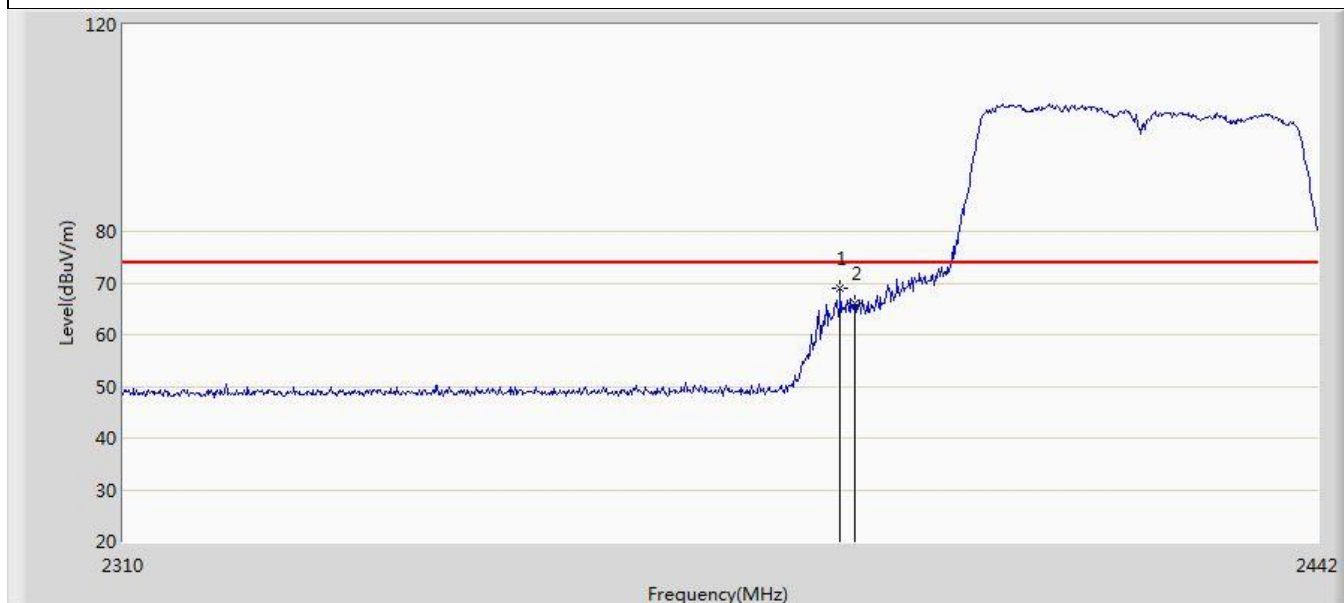


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2388.408	68.842	34.698	-5.158	74.000	34.144	PK
2		2390.000	65.975	31.824	-8.025	74.000	34.151	PK

Profile: 2430820R	Page No.: 43
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2422MHz by 802.11ac(40MHz) Ant 1	

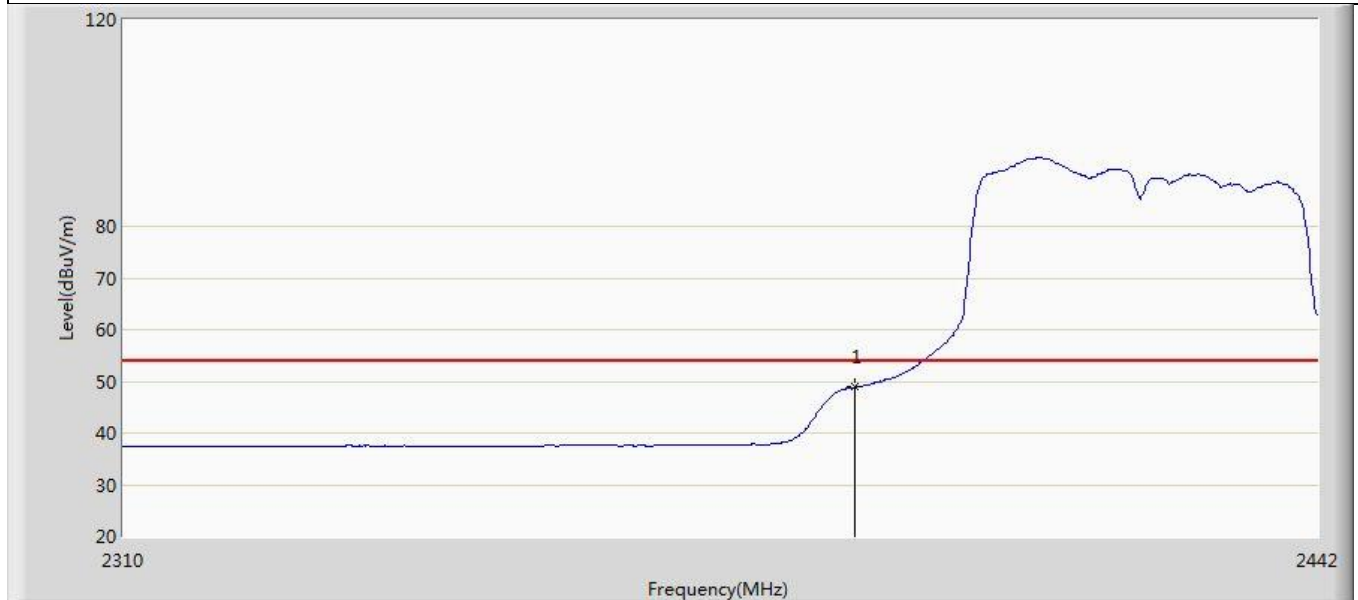


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.872	14.721	-5.128	54.000	34.151	AV

Profile: 2430820R	Page No.: 44
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2422MHz by 802.11ac(40MHz) Ant 1	

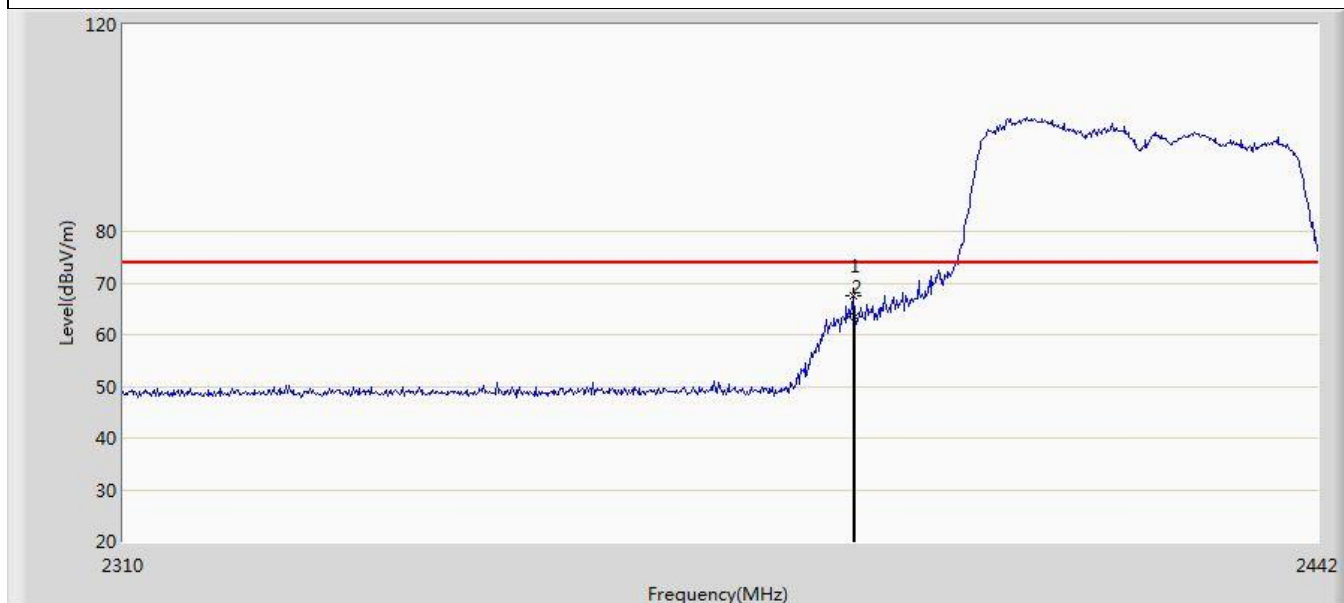


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2389.860	67.663	33.513	-6.337	74.000	34.151	PK
2		2390.000	63.564	29.413	-10.436	74.000	34.151	PK

Profile: 2430820R	Page No.: 45
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2452MHz by 802.11ac(40MHz) Ant 1	

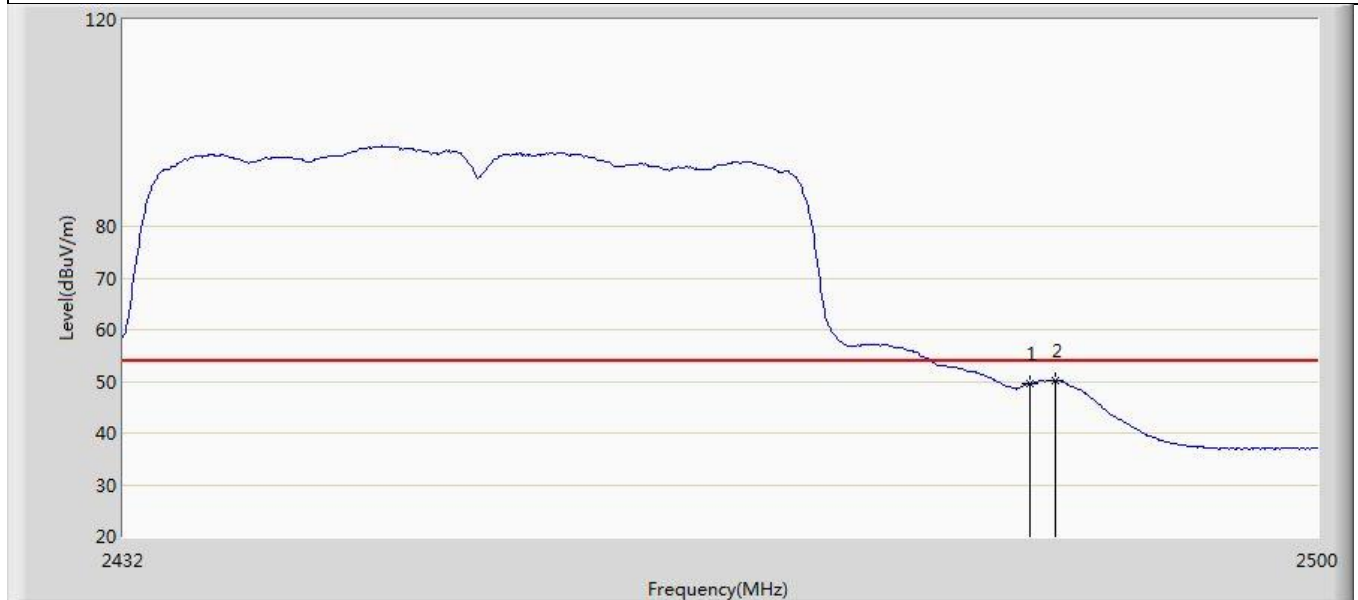


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	49.499	15.043	-4.501	54.000	34.456	AV
2	*	2484.904	50.079	15.608	-3.921	54.000	34.472	AV

Profile: 2430820R	Page No.: 46
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2452MHz by 802.11ac(40MHz) Ant 1	

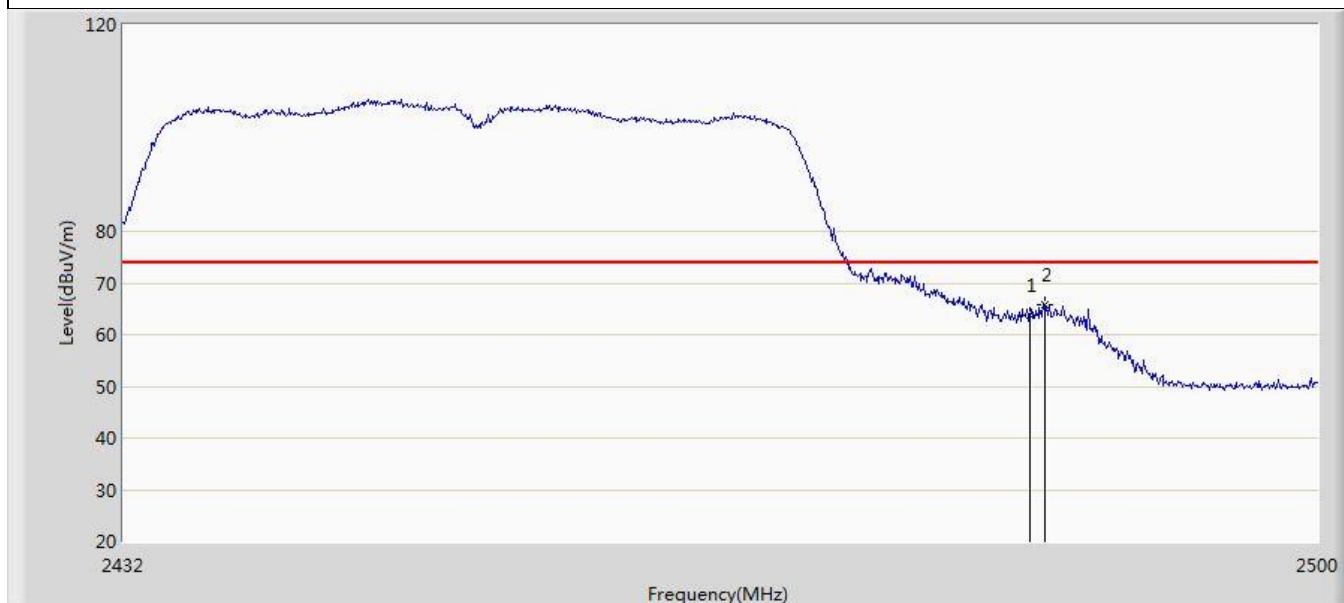

No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	63.734	29.278	-10.266	74.000	34.456	PK
2	*	2484.360	65.707	31.242	-8.293	74.000	34.465	PK

Profile: 2430820R	Page No.: 47
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2452MHz by 802.11ac(40MHz) Ant 1	

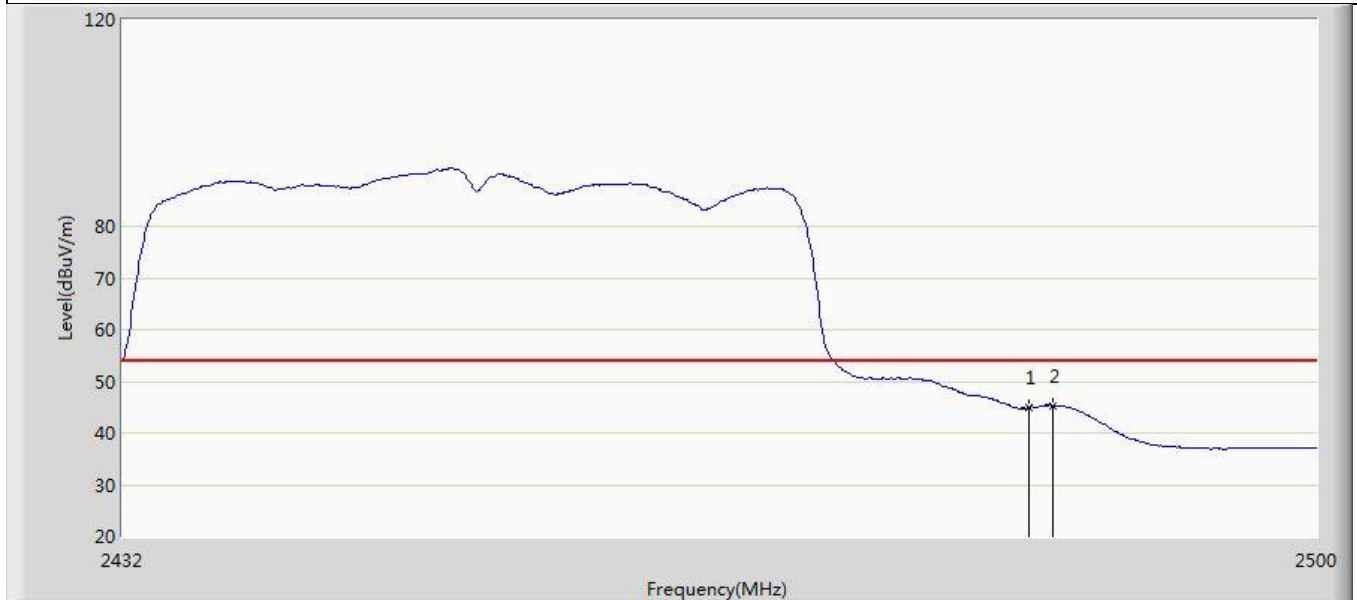


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	44.955	10.499	-9.045	54.000	34.456	AV
2	*	2484.836	45.322	10.851	-8.678	54.000	34.470	AV

Profile: 2430820R	Page No.: 48
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 6 : Transmit at 2452MHz by 802.11ac(40MHz) Ant 1	




No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	58.611	24.155	-15.389	74.000	34.456	PK
2	*	2485.584	62.236	27.757	-11.764	74.000	34.478	PK

Profile: 2430820R	Page No.: 49
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2412MHz by 802.11ax(20MHz) Ant 1	

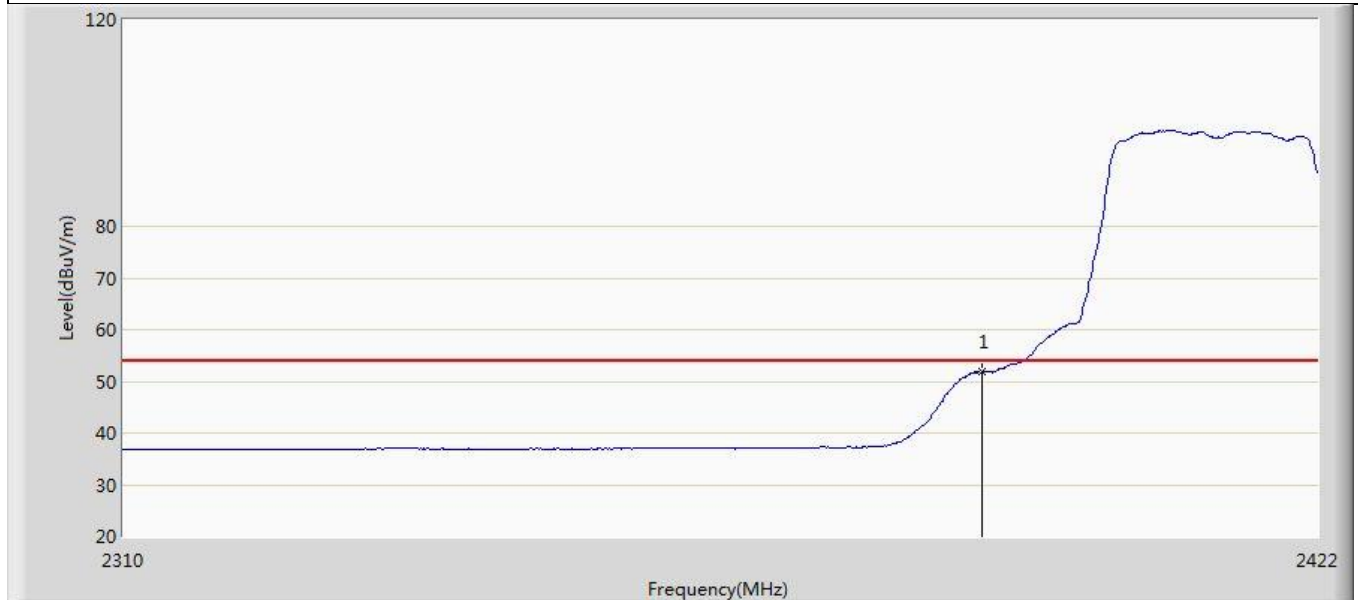


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	51.773	17.622	-2.227	54.000	34.151	AV

Profile: 2430820R	Page No.: 50
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2412MHz by 802.11ax(20MHz) Ant 1	

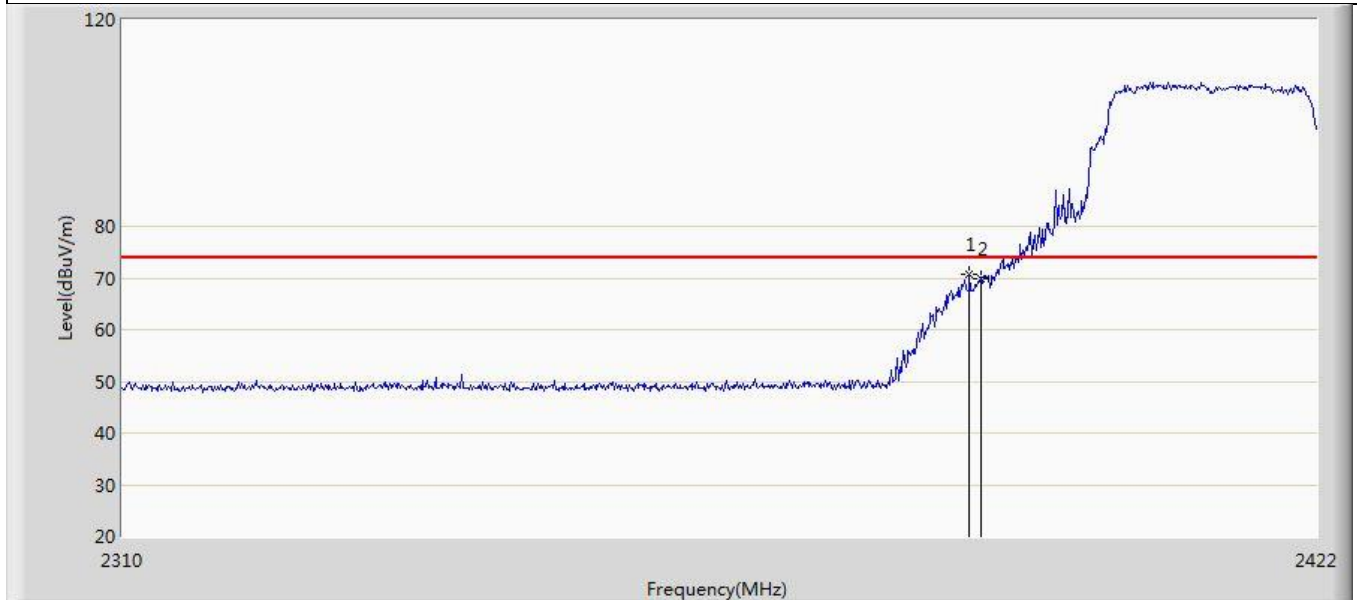


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2388.960	70.652	36.506	-3.348	74.000	34.146	PK
2		2390.000	69.951	35.800	-4.049	74.000	34.151	PK

Profile: 2430820R	Page No.: 51
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2412MHz by 802.11ax(20MHz) Ant 1	

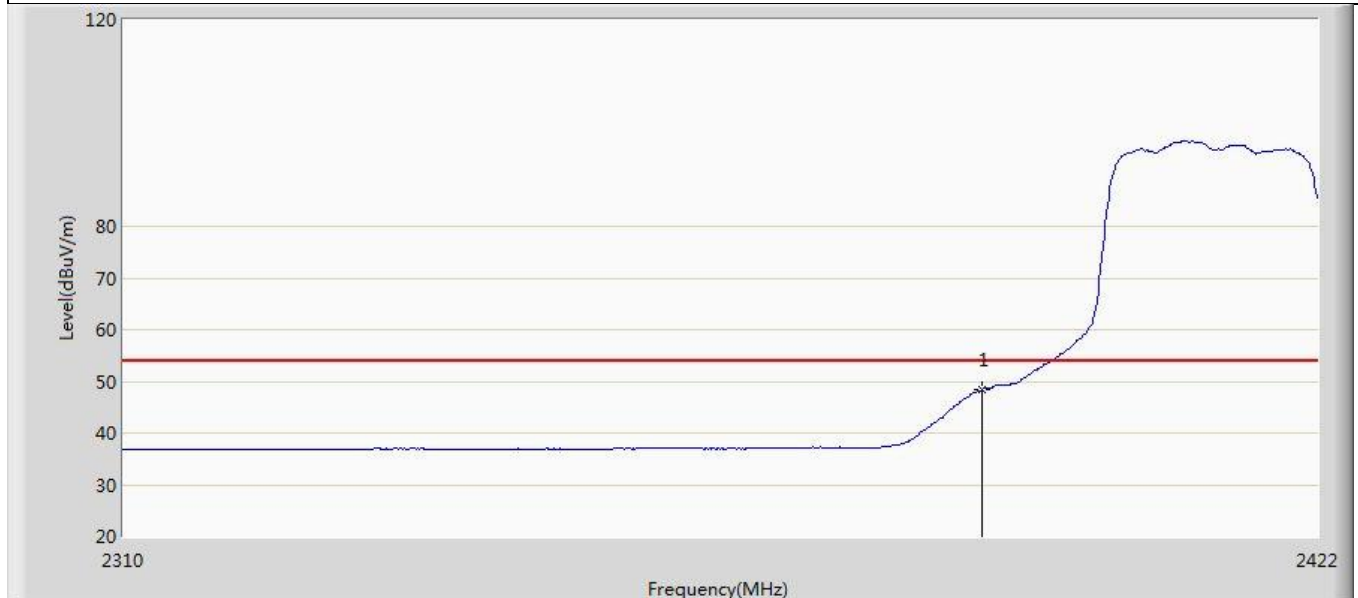


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.371	14.220	-5.629	54.000	34.151	AV

Profile: 2430820R	Page No.: 52
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2412MHz by 802.11ax(20MHz) Ant 1	

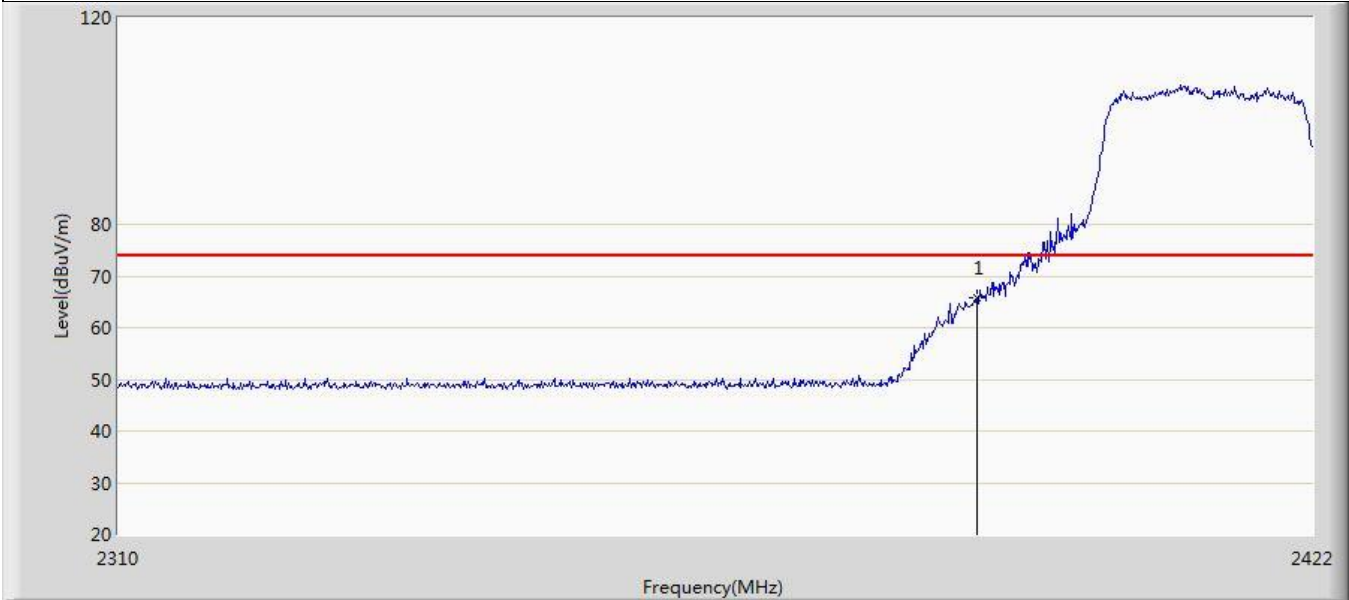


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	65.683	31.532	-8.317	74.000	34.151	PK

Profile: 2430820R	Page No.: 53
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2462MHz by 802.11ax(20MHz) Ant 1	

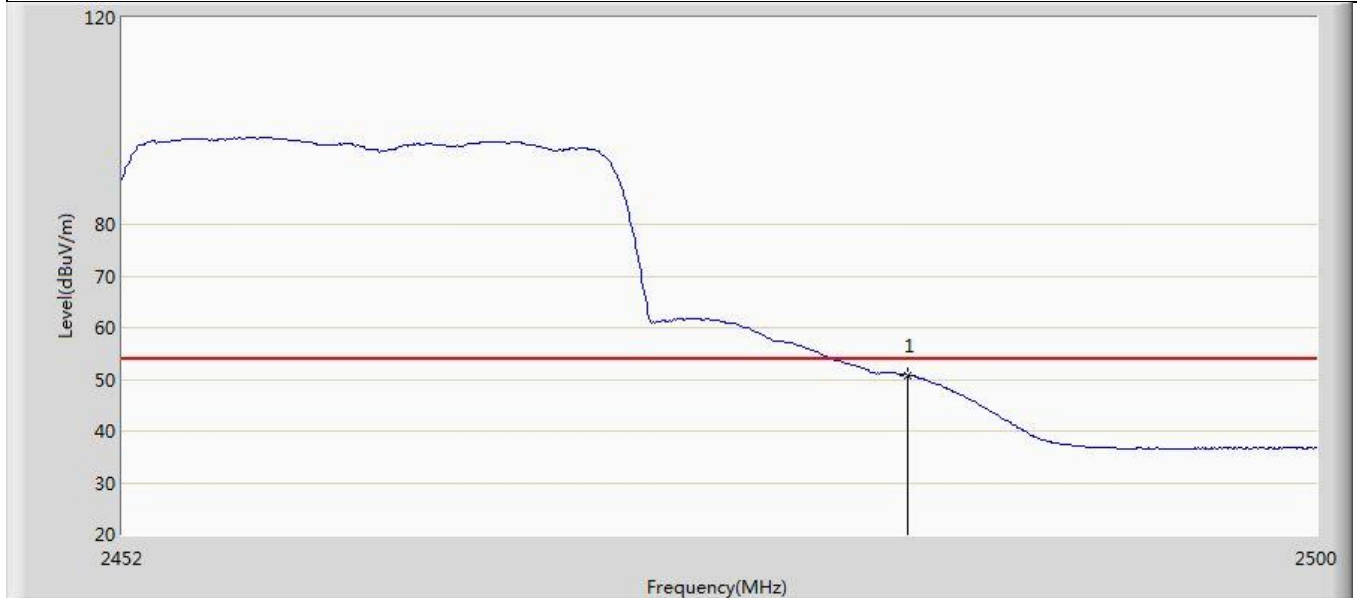


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.776	16.320	-3.224	54.000	34.456	AV

Profile: 2430820R	Page No.: 54
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2462MHz by 802.11ax(20MHz) Ant 1	

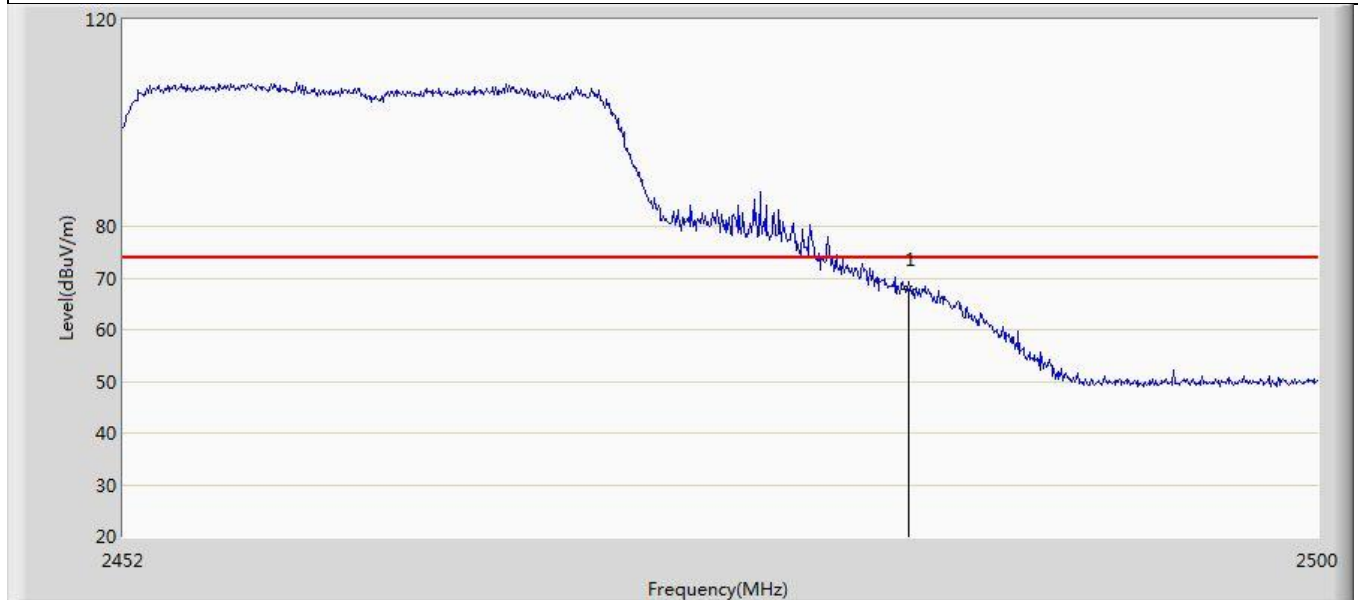


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	67.789	33.333	-6.211	74.000	34.456	PK

Profile: 2430820R	Page No.: 55
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2462MHz by 802.11ax(20MHz) Ant 1	

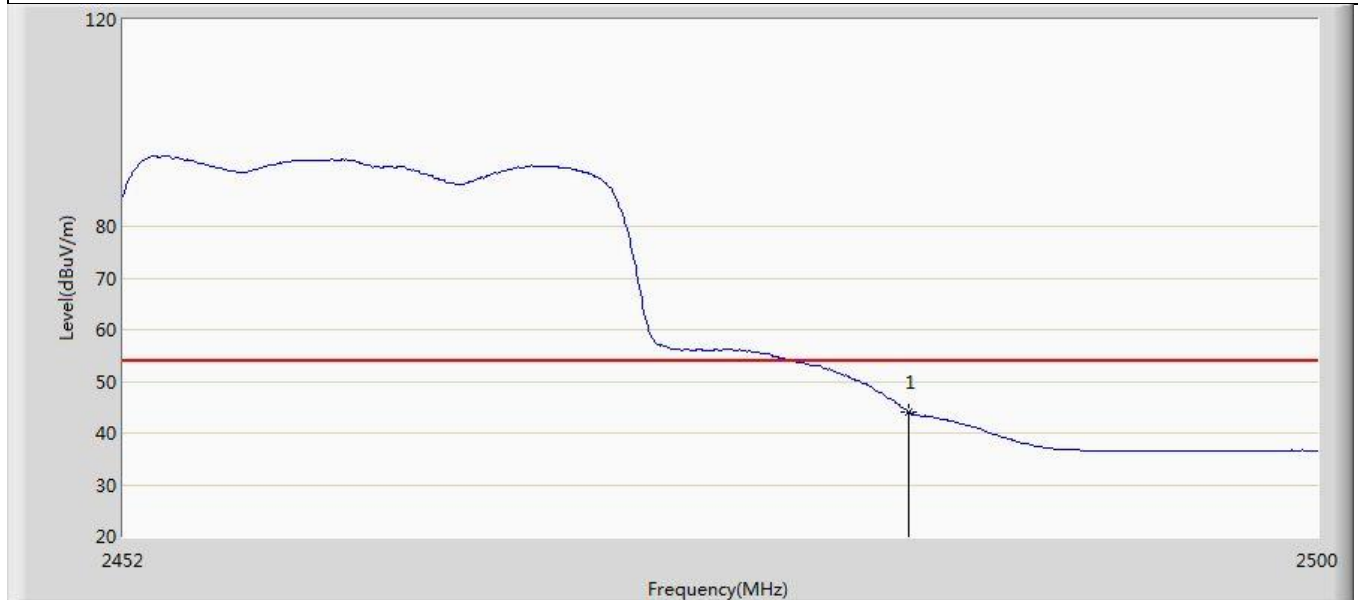


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	43.956	9.500	-10.044	54.000	34.456	AV

Profile: 2430820R	Page No.: 56
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 7 : Transmit at 2462MHz by 802.11ax(20MHz) Ant 1	

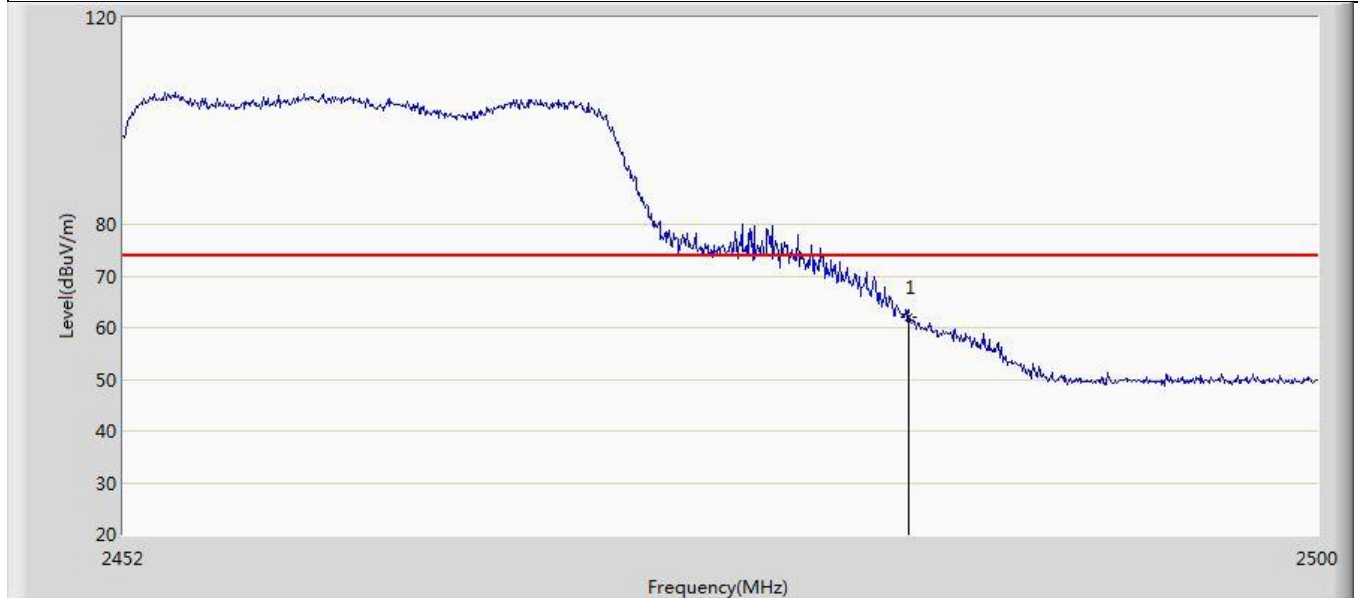


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	61.951	27.495	-12.049	74.000	34.456	PK

Profile: 2430820R	Page No.: 57
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2422MHz by 802.11ax(40MHz) Ant 1	

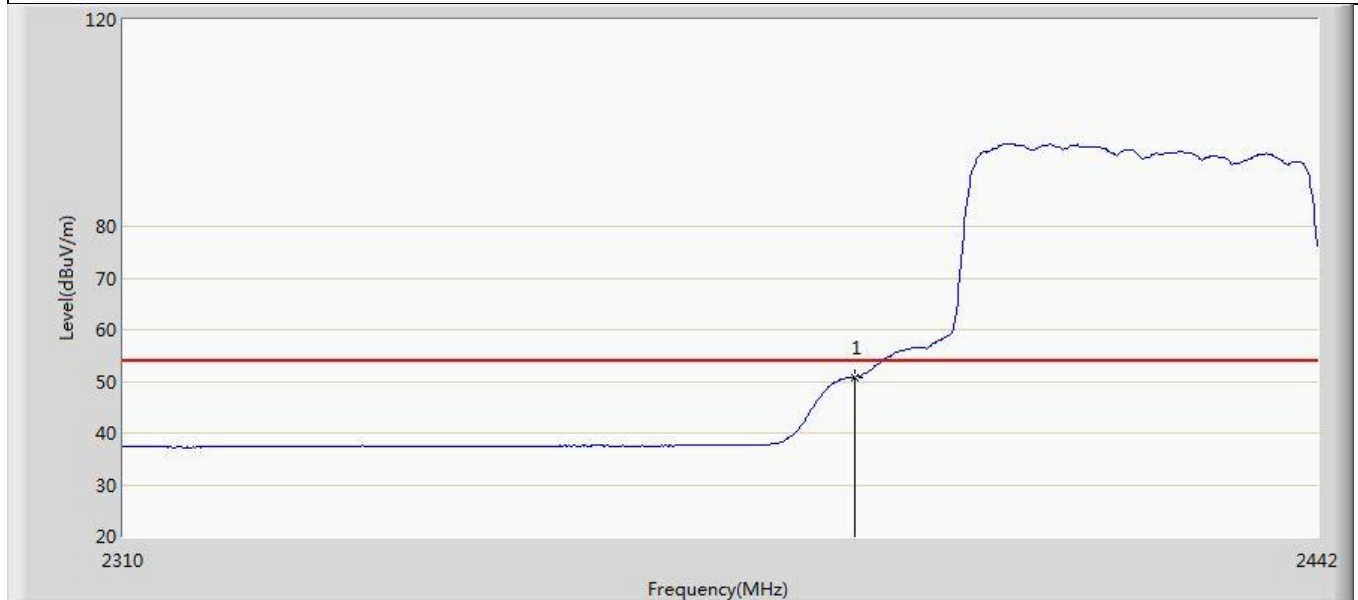


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.833	16.682	-3.167	54.000	34.151	AV

Profile: 2430820R	Page No.: 58
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2422MHz by 802.11ax(40MHz) Ant 1	

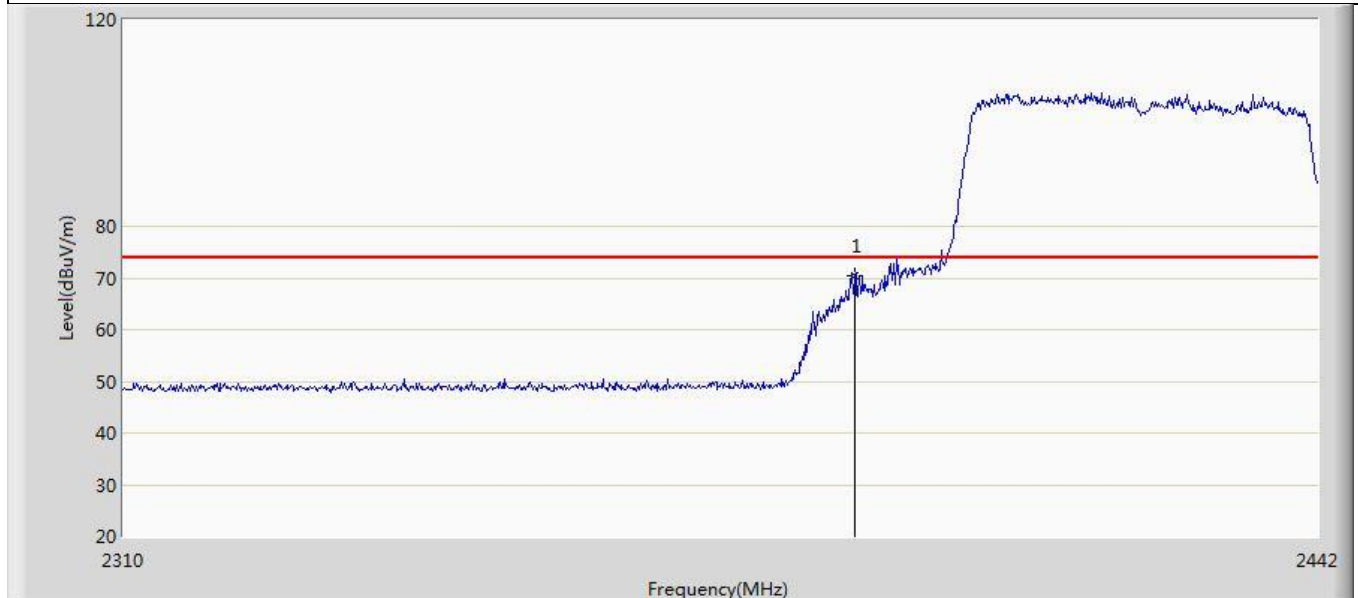


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	70.434	36.283	-3.566	74.000	34.151	PK

Profile: 2430820R	Page No.: 59
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2422MHz by 802.11ax(40MHz) Ant 1	

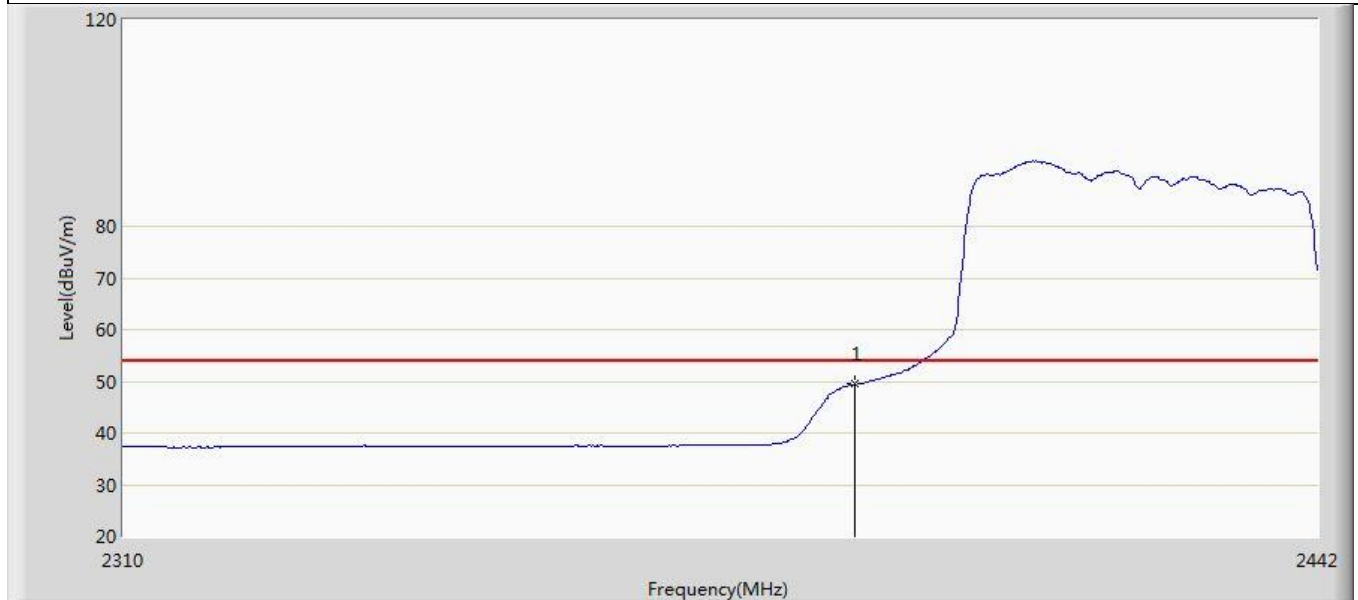


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.461	15.310	-4.539	54.000	34.151	AV

Profile: 2430820R	Page No.: 60
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2422MHz by 802.11ax(40MHz) Ant 1	

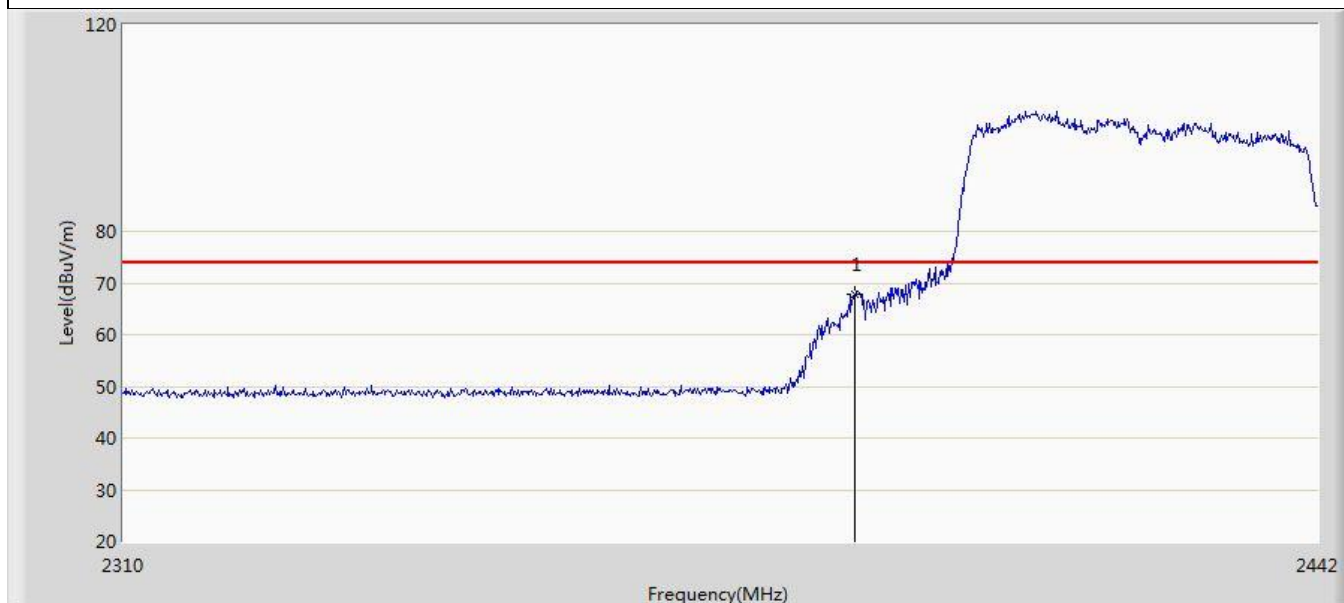

No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	67.855	33.704	-6.145	74.000	34.151	PK

Profile: 2430820R	Page No.: 61
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2452MHz by 802.11ax(40MHz) Ant 1	

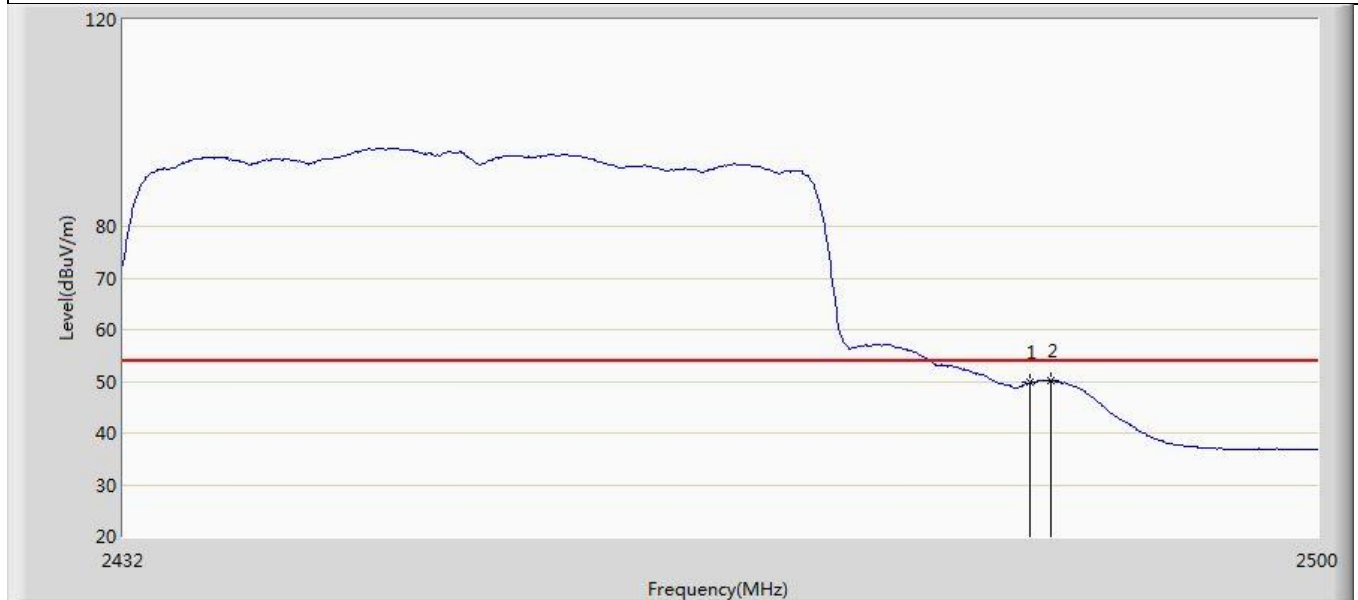


No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	49.728	15.272	-4.272	54.000	34.456	AV
2	*	2484.700	50.081	15.612	-3.919	54.000	34.469	AV

Profile: 2430820R	Page No.: 62
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2452MHz by 802.11ax(40MHz) Ant 1	



No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	66.357	31.901	-7.643	74.000	34.456	PK
2	*	2484.156	69.622	35.159	-4.378	74.000	34.463	PK

Profile: 2430820R	Page No.: 63
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2452MHz by 802.11ax(40MHz) Ant 1	

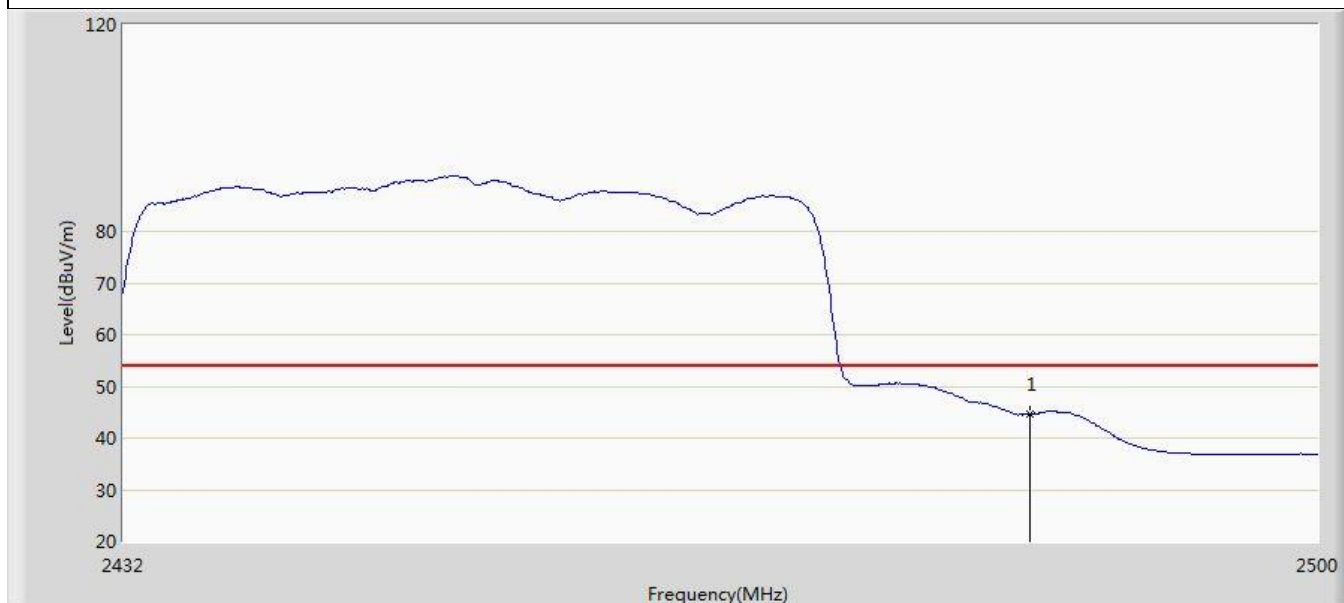

No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.704	10.248	-9.296	54.000	34.456	AV

Profile: 2430820R	Page No.: 64
Engineer: Yuliu	
Site: AC5	Time: 2024/08/05 - 23:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Argo	Power: Battery Powered
Note: Mode 8 : Transmit at 2452MHz by 802.11ax(40MHz) Ant 1	



No	Mark	Frequency (MHz) Ant 1	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	61.537	27.081	-12.463	74.000	34.456	PK
2	*	2484.496	64.784	30.317	-9.216	74.000	34.467	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)
2. We have evaluated SISO, MIMO mode, shown in the report is the worst data.


Appendix E: Conducted Spurious Emission


Test Result for Band edge:

TestMode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	10.39	-42.68	≤-19.61	PASS
		High	2462	10.23	-53.19	≤-19.77	PASS
11G	Ant1	Low	2412	7.60	-30.71	≤-22.4	PASS
		High	2462	7.72	-36.18	≤-22.28	PASS
11N20SISO	Ant1	Low	2412	7.19	-32.78	≤-22.81	PASS
		High	2462	5.83	-37.12	≤-24.17	PASS
11N40SISO	Ant1	Low	2422	1.69	-39.6	≤-28.31	PASS
		High	2452	4.31	-37.83	≤-25.69	PASS
11AC20SISO	Ant1	Low	2412	8.10	-32.52	≤-21.9	PASS
		High	2462	7.91	-38.26	≤-22.09	PASS
11AC40SISO	Ant1	Low	2422	0.04	-40.22	≤-29.96	PASS
		High	2452	4.84	-39.33	≤-25.16	PASS
11AX20SISO	Ant1	Low	2412	6.03	-30.8	≤-23.97	PASS
		High	2462	7.93	-36.98	≤-22.07	PASS
11AX40SISO	Ant1	Low	2422	1.97	-39.35	≤-28.03	PASS
		High	2452	-0.40	-39.43	≤-30.4	PASS

Note : We have evaluated SISO, MIMO mode, shown in the report is the worst data.

Test Graphs for Band edge

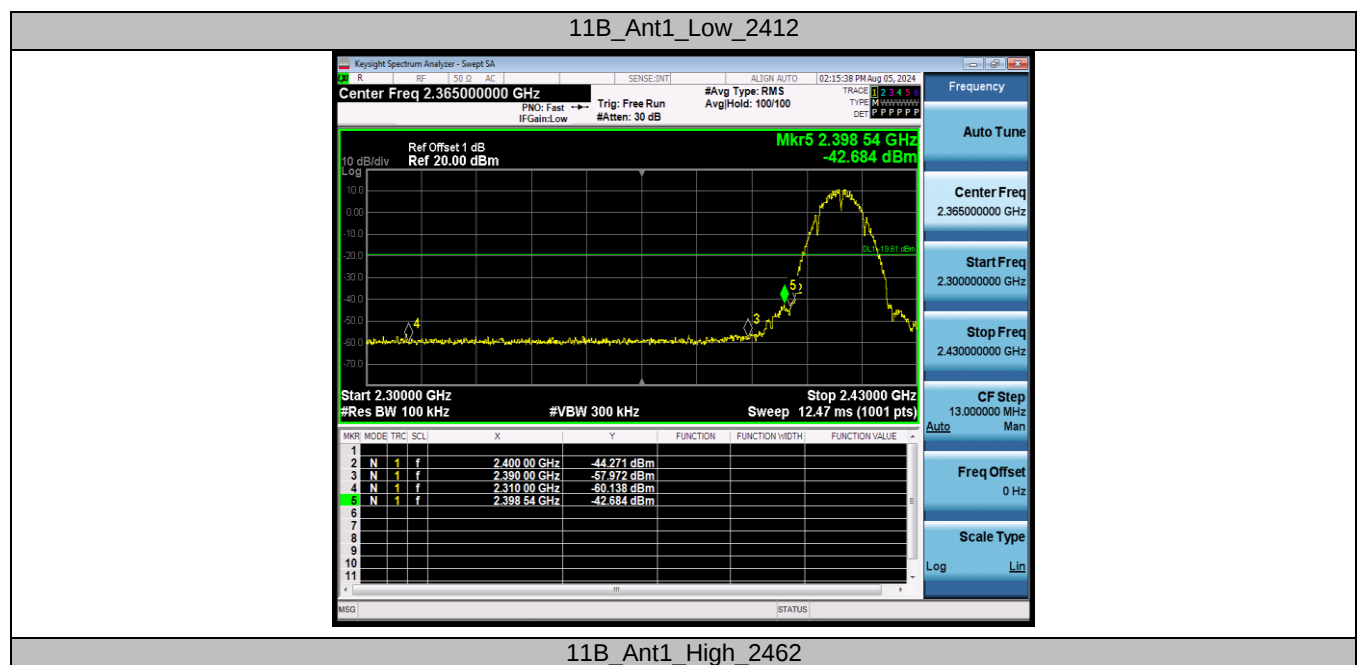


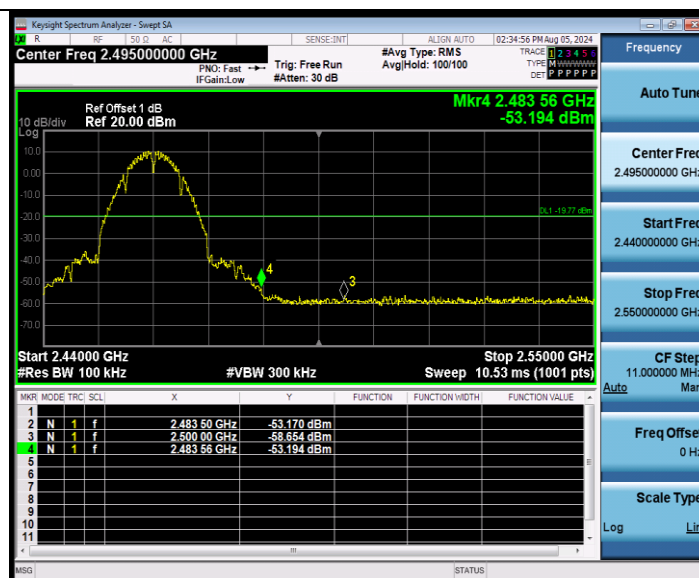


11G_Ant1_Low_2412




11G_Ant1_High_2462

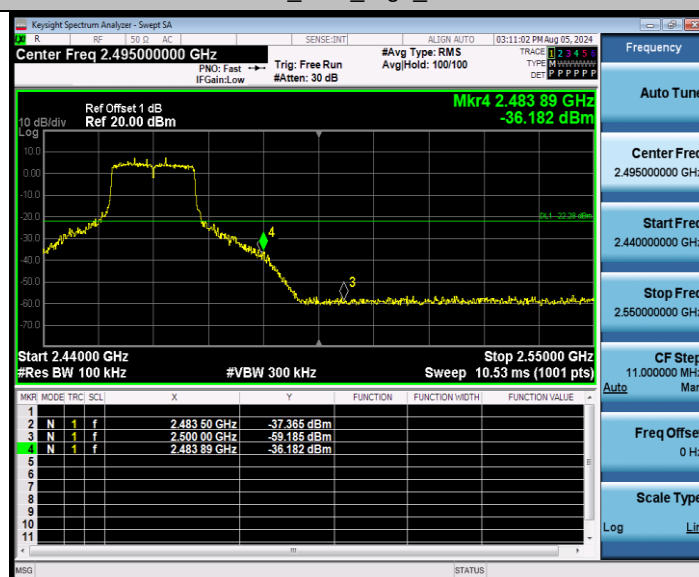


11N20SISO_Ant1_Low_2412

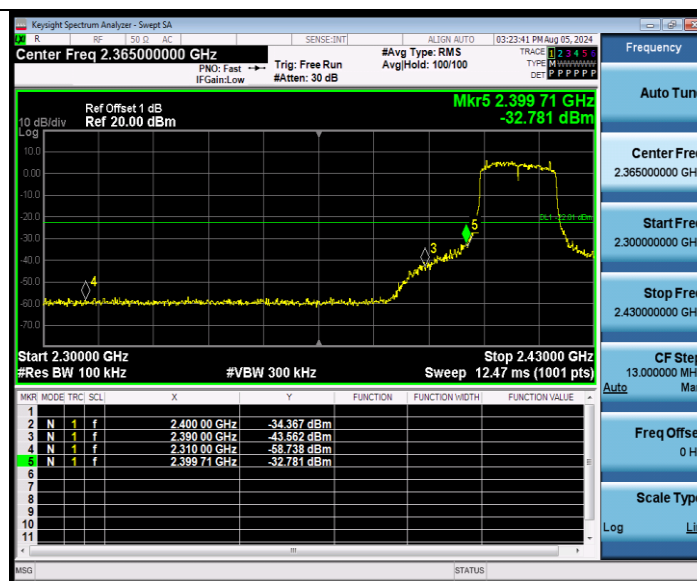

11N20SISO_Ant1_High_2462

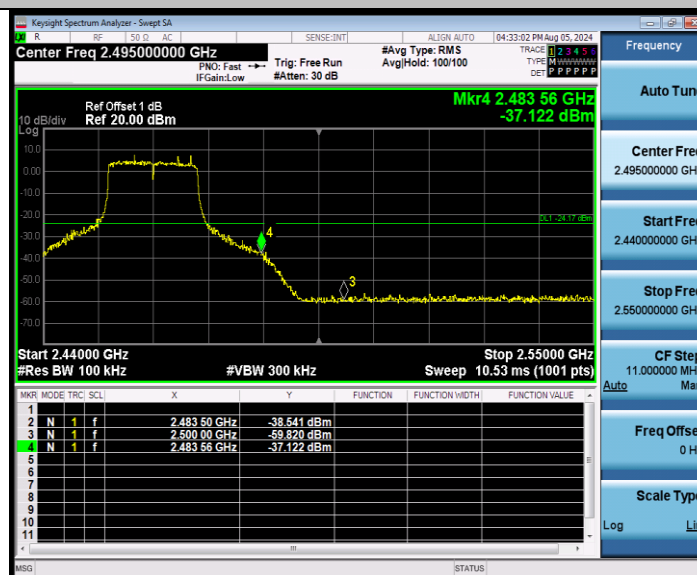


11N40SISO_Ant1_Low_2422

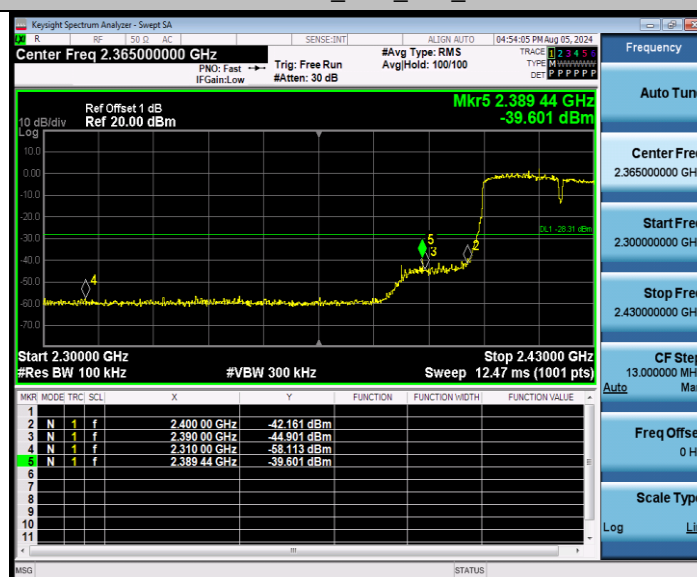


11N40SISO_Ant1_High_2452




11AC20SISO_Ant1_Low_2412

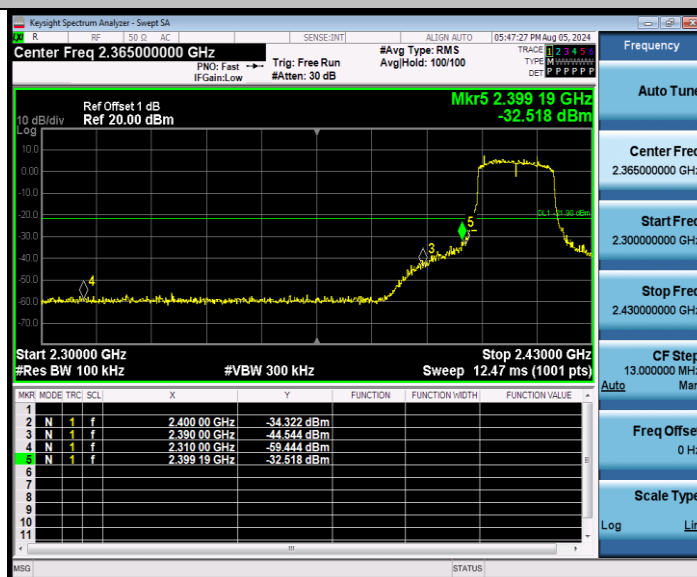

11AC20SISO_Ant1_High_2462

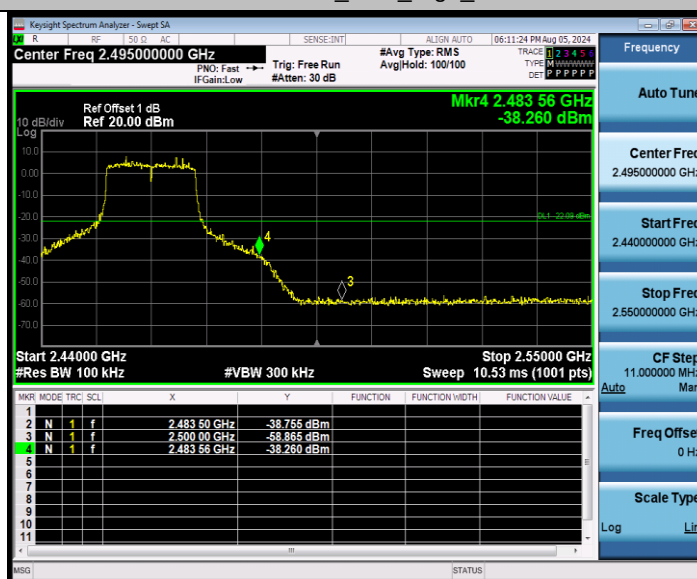

11AC40SISO_Ant1_Low_2422

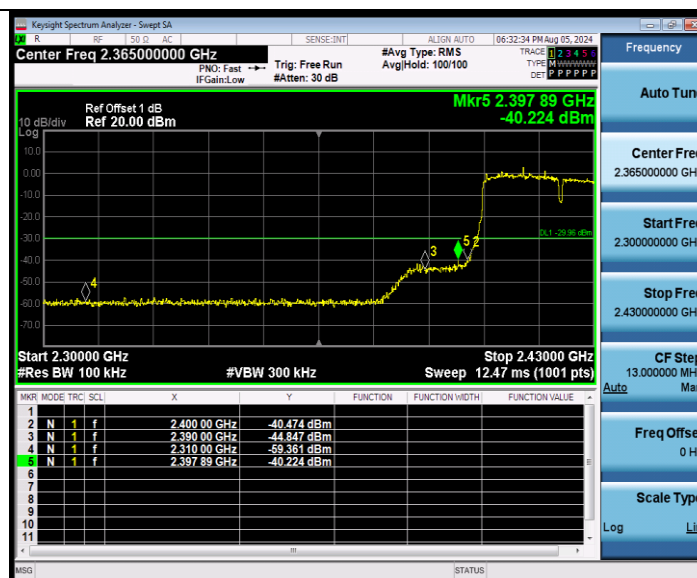

11AC40SISO_Ant1_High_2452




11AX20SISO_Ant1_Low_2412



11AX20SISO_Ant1_High_2462



11AX40SISO_Ant1_Low_2422

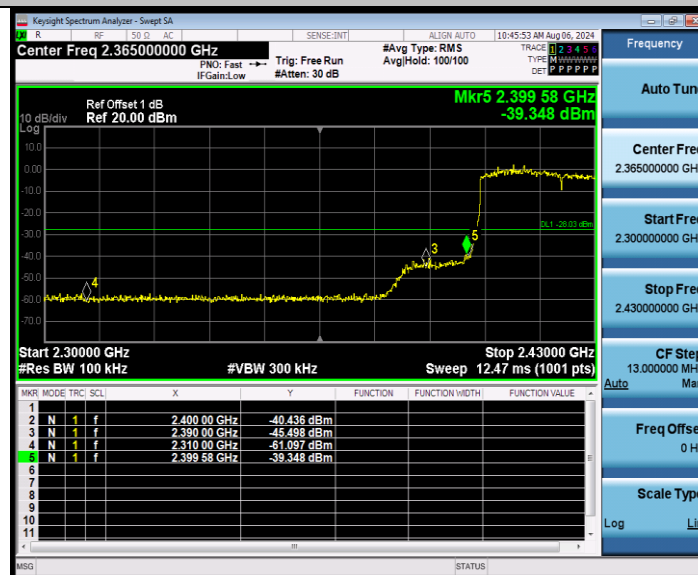

11AX40SISO_Ant1_High_2452



Test Result for Spurious Emission:

TestMode	Antenna	Frequency [MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	30~1000	10.39	-68.39	≤-19.61	PASS
			1000~3000	10.39	-63.65	≤-19.61	PASS
			3000~5000	10.39	-56.69	≤-19.61	PASS
			5000~7000	10.39	-65.95	≤-19.61	PASS
			7000~9000	10.39	-67.23	≤-19.61	PASS
			9000~11000	10.39	-67	≤-19.61	PASS
			11000~13000	10.39	-67.1	≤-19.61	PASS
			13000~15000	10.39	-64.7	≤-19.61	PASS
			15000~17000	10.39	-64.24	≤-19.61	PASS
			17000~19000	10.39	-62.12	≤-19.61	PASS
			19000~21000	10.39	-61.53	≤-19.61	PASS
			21000~23000	10.39	-60.76	≤-19.61	PASS
			23000~25000	10.39	-58.41	≤-19.61	PASS
		2437	30~1000	10.61	-68.16	≤-19.39	PASS
			1000~3000	10.61	-64.07	≤-19.39	PASS
			3000~5000	10.61	-51.14	≤-19.39	PASS
			5000~7000	10.61	-65.09	≤-19.39	PASS
			7000~9000	10.61	-67.17	≤-19.39	PASS
			9000~11000	10.61	-67.12	≤-19.39	PASS
			11000~13000	10.61	-66.67	≤-19.39	PASS
			13000~15000	10.61	-64.37	≤-19.39	PASS
			15000~17000	10.61	-64.22	≤-19.39	PASS
			17000~19000	10.61	-62.23	≤-19.39	PASS
			19000~21000	10.61	-62.13	≤-19.39	PASS
			21000~23000	10.61	-61.52	≤-19.39	PASS
			23000~25000	10.61	-58.26	≤-19.39	PASS
		2462	30~1000	10.23	-67.65	≤-19.77	PASS
			1000~3000	10.23	-63.57	≤-19.77	PASS
			3000~5000	10.23	-61.44	≤-19.77	PASS
			5000~7000	10.23	-65.61	≤-19.77	PASS
			7000~9000	10.23	-67.34	≤-19.77	PASS
			9000~11000	10.23	-66.97	≤-19.77	PASS
			11000~13000	10.23	-66.59	≤-19.77	PASS
			13000~15000	10.23	-65.27	≤-19.77	PASS
			15000~17000	10.23	-64.33	≤-19.77	PASS
			17000~19000	10.23	-62.29	≤-19.77	PASS
			19000~21000	10.23	-62.39	≤-19.77	PASS
			21000~23000	10.23	-61.57	≤-19.77	PASS
			23000~25000	10.23	-58.56	≤-19.77	PASS
11G	Ant1	2412	30~1000	7.60	-68.4	≤-22.4	PASS
			1000~3000	7.60	-64.03	≤-22.4	PASS
			3000~5000	7.60	-62.66	≤-22.4	PASS
			5000~7000	7.60	-65.76	≤-22.4	PASS
			7000~9000	7.60	-66.06	≤-22.4	PASS
			9000~11000	7.60	-66.64	≤-22.4	PASS

			11000~13000	7.60	-66.63	≤ -22.4	PASS
			13000~15000	7.60	-64.67	≤ -22.4	PASS
			15000~17000	7.60	-63.92	≤ -22.4	PASS
			17000~19000	7.60	-62.06	≤ -22.4	PASS
			19000~21000	7.60	-61.88	≤ -22.4	PASS
			21000~23000	7.60	-60.76	≤ -22.4	PASS
			23000~25000	7.60	-58.55	≤ -22.4	PASS
		2437	30~1000	7.34	-68.08	≤ -22.66	PASS
			1000~3000	7.34	-63.91	≤ -22.66	PASS
			3000~5000	7.34	-60.83	≤ -22.66	PASS
			5000~7000	7.34	-65.82	≤ -22.66	PASS
			7000~9000	7.34	-66.91	≤ -22.66	PASS
			9000~11000	7.34	-66.86	≤ -22.66	PASS
			11000~13000	7.34	-66.97	≤ -22.66	PASS
			13000~15000	7.34	-65.22	≤ -22.66	PASS
			15000~17000	7.34	-63.56	≤ -22.66	PASS
			17000~19000	7.34	-61.74	≤ -22.66	PASS
			19000~21000	7.34	-62.01	≤ -22.66	PASS
			21000~23000	7.34	-61.36	≤ -22.66	PASS
			23000~25000	7.34	-58.35	≤ -22.66	PASS
		2462	30~1000	7.72	-67.85	≤ -22.28	PASS
			1000~3000	7.72	-64.41	≤ -22.28	PASS
			3000~5000	7.72	-62.75	≤ -22.28	PASS
			5000~7000	7.72	-65.35	≤ -22.28	PASS
			7000~9000	7.72	-67.08	≤ -22.28	PASS
			9000~11000	7.72	-66.65	≤ -22.28	PASS
			11000~13000	7.72	-66.6	≤ -22.28	PASS
			13000~15000	7.72	-64.73	≤ -22.28	PASS
			15000~17000	7.72	-63.96	≤ -22.28	PASS
			17000~19000	7.72	-62.56	≤ -22.28	PASS
			19000~21000	7.72	-62.16	≤ -22.28	PASS
			21000~23000	7.72	-61.26	≤ -22.28	PASS
			23000~25000	7.72	-58.61	≤ -22.28	PASS
11N20SISO	Ant1	2412	30~1000	7.19	-68.81	≤ -22.81	PASS
			1000~3000	7.19	-64.32	≤ -22.81	PASS
			3000~5000	7.19	-63.2	≤ -22.81	PASS
			5000~7000	7.19	-64.98	≤ -22.81	PASS
			7000~9000	7.19	-67.27	≤ -22.81	PASS
			9000~11000	7.19	-66.59	≤ -22.81	PASS
			11000~13000	7.19	-66.88	≤ -22.81	PASS
			13000~15000	7.19	-64.46	≤ -22.81	PASS
			15000~17000	7.19	-64.06	≤ -22.81	PASS
			17000~19000	7.19	-62.35	≤ -22.81	PASS
			19000~21000	7.19	-62.55	≤ -22.81	PASS
			21000~23000	7.19	-61.41	≤ -22.81	PASS
			23000~25000	7.19	-58.98	≤ -22.81	PASS
		2437	30~1000	7.39	-68.52	≤ -22.61	PASS
			1000~3000	7.39	-64.16	≤ -22.61	PASS
			3000~5000	7.39	-60.78	≤ -22.61	PASS
			5000~7000	7.39	-65.78	≤ -22.61	PASS

			7000~9000	7.39	-66.6	≤ -22.61	PASS
			9000~11000	7.39	-66.33	≤ -22.61	PASS
			11000~13000	7.39	-66.36	≤ -22.61	PASS
			13000~15000	7.39	-64.35	≤ -22.61	PASS
			15000~17000	7.39	-64.24	≤ -22.61	PASS
			17000~19000	7.39	-62.12	≤ -22.61	PASS
			19000~21000	7.39	-61.84	≤ -22.61	PASS
			21000~23000	7.39	-60.72	≤ -22.61	PASS
			23000~25000	7.39	-57.91	≤ -22.61	PASS
		2462	30~1000	5.83	-68.86	≤ -24.17	PASS
			1000~3000	5.83	-64.18	≤ -24.17	PASS
			3000~5000	5.83	-63.67	≤ -24.17	PASS
			5000~7000	5.83	-66.13	≤ -24.17	PASS
			7000~9000	5.83	-66.87	≤ -24.17	PASS
			9000~11000	5.83	-66.42	≤ -24.17	PASS
			11000~13000	5.83	-67.1	≤ -24.17	PASS
			13000~15000	5.83	-65.03	≤ -24.17	PASS
			15000~17000	5.83	-64.44	≤ -24.17	PASS
			17000~19000	5.83	-62.93	≤ -24.17	PASS
			19000~21000	5.83	-62.33	≤ -24.17	PASS
			21000~23000	5.83	-61.23	≤ -24.17	PASS
			23000~25000	5.83	-58.16	≤ -24.17	PASS
11N40SISO	Ant1	2422	30~1000	1.69	-67.98	≤ -28.31	PASS
			1000~3000	1.69	-65.11	≤ -28.31	PASS
			3000~5000	1.69	-64.85	≤ -28.31	PASS
			5000~7000	1.69	-64.88	≤ -28.31	PASS
			7000~9000	1.69	-66.78	≤ -28.31	PASS
			9000~11000	1.69	-66.28	≤ -28.31	PASS
			11000~13000	1.69	-66.01	≤ -28.31	PASS
			13000~15000	1.69	-65.14	≤ -28.31	PASS
			15000~17000	1.69	-64.16	≤ -28.31	PASS
			17000~19000	1.69	-62.31	≤ -28.31	PASS
			19000~21000	1.69	-62.04	≤ -28.31	PASS
			21000~23000	1.69	-61.91	≤ -28.31	PASS
			23000~25000	1.69	-58.26	≤ -28.31	PASS
		2437	30~1000	4.30	-68.49	≤ -25.7	PASS
			1000~3000	4.30	-64.43	≤ -25.7	PASS
			3000~5000	4.30	-63.7	≤ -25.7	PASS
			5000~7000	4.30	-65.03	≤ -25.7	PASS
			7000~9000	4.30	-67.01	≤ -25.7	PASS
			9000~11000	4.30	-66.37	≤ -25.7	PASS
			11000~13000	4.30	-66.78	≤ -25.7	PASS
			13000~15000	4.30	-65.32	≤ -25.7	PASS
			15000~17000	4.30	-63.28	≤ -25.7	PASS
			17000~19000	4.30	-61.96	≤ -25.7	PASS
			19000~21000	4.30	-62.24	≤ -25.7	PASS
			21000~23000	4.30	-61.62	≤ -25.7	PASS
			23000~25000	4.30	-58.62	≤ -25.7	PASS
		2452	30~1000	4.31	-68.22	≤ -25.69	PASS
			1000~3000	4.31	-64.47	≤ -25.69	PASS

11AC20SISO	Ant1		3000~5000	4.31	-63.85	≤-25.69	PASS
			5000~7000	4.31	-65.08	≤-25.69	PASS
			7000~9000	4.31	-66.26	≤-25.69	PASS
			9000~11000	4.31	-66.18	≤-25.69	PASS
			11000~13000	4.31	-66.87	≤-25.69	PASS
			13000~15000	4.31	-64.94	≤-25.69	PASS
			15000~17000	4.31	-64.43	≤-25.69	PASS
			17000~19000	4.31	-62.37	≤-25.69	PASS
			19000~21000	4.31	-62.32	≤-25.69	PASS
			21000~23000	4.31	-61.67	≤-25.69	PASS
			23000~25000	4.31	-58.94	≤-25.69	PASS
		2412	30~1000	8.10	-68.76	≤-21.9	PASS
			1000~3000	8.10	-64.86	≤-21.9	PASS
			3000~5000	8.10	-63.64	≤-21.9	PASS
			5000~7000	8.10	-65.4	≤-21.9	PASS
			7000~9000	8.10	-66.63	≤-21.9	PASS
			9000~11000	8.10	-66.6	≤-21.9	PASS
			11000~13000	8.10	-66.6	≤-21.9	PASS
			13000~15000	8.10	-64.68	≤-21.9	PASS
			15000~17000	8.10	-64.03	≤-21.9	PASS
			17000~19000	8.10	-62.43	≤-21.9	PASS
			19000~21000	8.10	-61.82	≤-21.9	PASS
			21000~23000	8.10	-61.71	≤-21.9	PASS
			23000~25000	8.10	-58.76	≤-21.9	PASS
		2437	30~1000	5.70	-67.99	≤-24.3	PASS
			1000~3000	5.70	-64.11	≤-24.3	PASS
			3000~5000	5.70	-60.04	≤-24.3	PASS
			5000~7000	5.70	-65.98	≤-24.3	PASS
			7000~9000	5.70	-67.05	≤-24.3	PASS
			9000~11000	5.70	-66.28	≤-24.3	PASS
			11000~13000	5.70	-66.72	≤-24.3	PASS
			13000~15000	5.70	-64.63	≤-24.3	PASS
			15000~17000	5.70	-63.78	≤-24.3	PASS
			17000~19000	5.70	-62.58	≤-24.3	PASS
			19000~21000	5.70	-62.47	≤-24.3	PASS
			21000~23000	5.70	-60.77	≤-24.3	PASS
			23000~25000	5.70	-58.76	≤-24.3	PASS
		2462	30~1000	7.91	-68.36	≤-22.09	PASS
			1000~3000	7.91	-63.84	≤-22.09	PASS
			3000~5000	7.91	-63.67	≤-22.09	PASS
			5000~7000	7.91	-65.01	≤-22.09	PASS
			7000~9000	7.91	-67.18	≤-22.09	PASS
			9000~11000	7.91	-66.54	≤-22.09	PASS
			11000~13000	7.91	-66.56	≤-22.09	PASS
			13000~15000	7.91	-64.29	≤-22.09	PASS
			15000~17000	7.91	-64.06	≤-22.09	PASS
			17000~19000	7.91	-61.92	≤-22.09	PASS
			19000~21000	7.91	-62.48	≤-22.09	PASS
			21000~23000	7.91	-60.93	≤-22.09	PASS
			23000~25000	7.91	-58.51	≤-22.09	PASS

11AC40SISO	Ant1	2422	30~1000	0.04	-67.59	≤-29.96	PASS
			1000~3000	0.04	-64.89	≤-29.96	PASS
			3000~5000	0.04	-63.94	≤-29.96	PASS
			5000~7000	0.04	-65.09	≤-29.96	PASS
			7000~9000	0.04	-66.24	≤-29.96	PASS
			9000~11000	0.04	-66.39	≤-29.96	PASS
			11000~13000	0.04	-65.91	≤-29.96	PASS
			13000~15000	0.04	-64.65	≤-29.96	PASS
			15000~17000	0.04	-63.97	≤-29.96	PASS
			17000~19000	0.04	-62.19	≤-29.96	PASS
			19000~21000	0.04	-61.82	≤-29.96	PASS
			21000~23000	0.04	-61.33	≤-29.96	PASS
			23000~25000	0.04	-58.43	≤-29.96	PASS
		2437	30~1000	4.28	-68.84	≤-25.72	PASS
			1000~3000	4.28	-64.26	≤-25.72	PASS
			3000~5000	4.28	-64.33	≤-25.72	PASS
			5000~7000	4.28	-65.72	≤-25.72	PASS
			7000~9000	4.28	-66.22	≤-25.72	PASS
			9000~11000	4.28	-67.28	≤-25.72	PASS
			11000~13000	4.28	-66.7	≤-25.72	PASS
			13000~15000	4.28	-64.98	≤-25.72	PASS
			15000~17000	4.28	-63.83	≤-25.72	PASS
			17000~19000	4.28	-62.5	≤-25.72	PASS
			19000~21000	4.28	-62.16	≤-25.72	PASS
			21000~23000	4.28	-60.49	≤-25.72	PASS
			23000~25000	4.28	-58.08	≤-25.72	PASS
		2452	30~1000	4.84	-68.23	≤-25.16	PASS
			1000~3000	4.84	-63.57	≤-25.16	PASS
			3000~5000	4.84	-64.12	≤-25.16	PASS
			5000~7000	4.84	-65.16	≤-25.16	PASS
			7000~9000	4.84	-67.14	≤-25.16	PASS
			9000~11000	4.84	-66.59	≤-25.16	PASS
			11000~13000	4.84	-66.74	≤-25.16	PASS
			13000~15000	4.84	-64.79	≤-25.16	PASS
			15000~17000	4.84	-63.97	≤-25.16	PASS
			17000~19000	4.84	-61.98	≤-25.16	PASS
			19000~21000	4.84	-62.19	≤-25.16	PASS
			21000~23000	4.84	-61.96	≤-25.16	PASS
			23000~25000	4.84	-58.25	≤-25.16	PASS
11AX20SISO	Ant1	2412	30~1000	6.03	-68.36	≤-23.97	PASS
			1000~3000	6.03	-63.93	≤-23.97	PASS
			3000~5000	6.03	-63.9	≤-23.97	PASS
			5000~7000	6.03	-65.68	≤-23.97	PASS
			7000~9000	6.03	-66.65	≤-23.97	PASS
			9000~11000	6.03	-66.92	≤-23.97	PASS
			11000~13000	6.03	-66.9	≤-23.97	PASS
			13000~15000	6.03	-64.93	≤-23.97	PASS
			15000~17000	6.03	-63.38	≤-23.97	PASS
			17000~19000	6.03	-62.25	≤-23.97	PASS
			19000~21000	6.03	-61.81	≤-23.97	PASS

			21000~23000	6.03	-61.45	≤-23.97	PASS
			23000~25000	6.03	-58.04	≤-23.97	PASS
		2437	30~1000	7.37	-67.56	≤-22.63	PASS
			1000~3000	7.37	-64.01	≤-22.63	PASS
			3000~5000	7.37	-59.93	≤-22.63	PASS
			5000~7000	7.37	-65.53	≤-22.63	PASS
			7000~9000	7.37	-66.92	≤-22.63	PASS
			9000~11000	7.37	-66.53	≤-22.63	PASS
			11000~13000	7.37	-66.81	≤-22.63	PASS
			13000~15000	7.37	-65.14	≤-22.63	PASS
			15000~17000	7.37	-64.16	≤-22.63	PASS
			17000~19000	7.37	-61.63	≤-22.63	PASS
			19000~21000	7.37	-62.27	≤-22.63	PASS
			21000~23000	7.37	-61.54	≤-22.63	PASS
			23000~25000	7.37	-58.47	≤-22.63	PASS
		2462	30~1000	7.93	-67.54	≤-22.07	PASS
			1000~3000	7.93	-64.18	≤-22.07	PASS
			3000~5000	7.93	-64.23	≤-22.07	PASS
			5000~7000	7.93	-65.71	≤-22.07	PASS
			7000~9000	7.93	-66.79	≤-22.07	PASS
			9000~11000	7.93	-66.89	≤-22.07	PASS
			11000~13000	7.93	-66.93	≤-22.07	PASS
			13000~15000	7.93	-64.38	≤-22.07	PASS
			15000~17000	7.93	-64.26	≤-22.07	PASS
			17000~19000	7.93	-62.24	≤-22.07	PASS
			19000~21000	7.93	-61.31	≤-22.07	PASS
			21000~23000	7.93	-61.39	≤-22.07	PASS
			23000~25000	7.93	-58.41	≤-22.07	PASS
11AX40SISO	Ant1	2422	30~1000	1.97	-69.17	≤-28.03	PASS
			1000~3000	1.97	-64.39	≤-28.03	PASS
			3000~5000	1.97	-64.28	≤-28.03	PASS
			5000~7000	1.97	-65.04	≤-28.03	PASS
			7000~9000	1.97	-66.74	≤-28.03	PASS
			9000~11000	1.97	-66.77	≤-28.03	PASS
			11000~13000	1.97	-67.14	≤-28.03	PASS
			13000~15000	1.97	-65.14	≤-28.03	PASS
			15000~17000	1.97	-64.51	≤-28.03	PASS
			17000~19000	1.97	-62.22	≤-28.03	PASS
			19000~21000	1.97	-61.95	≤-28.03	PASS
			21000~23000	1.97	-61.46	≤-28.03	PASS
			23000~25000	1.97	-58.85	≤-28.03	PASS
		2437	30~1000	0.97	-68.15	≤-29.03	PASS
			1000~3000	0.97	-65.13	≤-29.03	PASS
			3000~5000	0.97	-64.57	≤-29.03	PASS
			5000~7000	0.97	-64.99	≤-29.03	PASS
			7000~9000	0.97	-66.93	≤-29.03	PASS
			9000~11000	0.97	-66.93	≤-29.03	PASS
			11000~13000	0.97	-66.5	≤-29.03	PASS
			13000~15000	0.97	-64.55	≤-29.03	PASS
			15000~17000	0.97	-64.35	≤-29.03	PASS

			17000~19000	0.97	-62.65	≤ -29.03	PASS
			19000~21000	0.97	-62.08	≤ -29.03	PASS
			21000~23000	0.97	-61.02	≤ -29.03	PASS
			23000~25000	0.97	-58.41	≤ -29.03	PASS
		2452	30~1000	-0.40	-68.55	≤ -30.4	PASS
			1000~3000	-0.40	-64.94	≤ -30.4	PASS
			3000~5000	-0.40	-64.82	≤ -30.4	PASS
			5000~7000	-0.40	-65.75	≤ -30.4	PASS
			7000~9000	-0.40	-67	≤ -30.4	PASS
			9000~11000	-0.40	-67.01	≤ -30.4	PASS
			11000~13000	-0.40	-66.72	≤ -30.4	PASS
			13000~15000	-0.40	-64.13	≤ -30.4	PASS
			15000~17000	-0.40	-64.41	≤ -30.4	PASS
			17000~19000	-0.40	-62.48	≤ -30.4	PASS
			19000~21000	-0.40	-62.64	≤ -30.4	PASS
			21000~23000	-0.40	-61.29	≤ -30.4	PASS
			23000~25000	-0.40	-58.6	≤ -30.4	PASS

Note : We have evaluated SISO, MIMO mode, shown in the report is the worst data.

Test Graphs for Spurious Emission

