

Shenzhen Yishengbang Technology Co. LTD

The Holy bond Electronics Co., Ltd. Antenna Test Report

Customer: KEJINMING

Project: K300 GTV

WIFI 1: SLK-KJM-3212G1-R-210I-B

WIFI 2: SLK-KJM-3212G3-L-165I-G

BT: SLK-KJM-2813A5-M-150I-W Prepared by : Fan Xinzhu

Product: WIFI Antenna—FPC

Checked by : Eason Huang

Approved by :

Report date: 2025.05.27




Purpose

This report is to measure the performance of SLK for Master Antenna on KEJINMING. All measure data are showed below.

Content

1. Product Overview
2. Test Result
 - 2.1 VSWR/S11
 - 2.2 Antenna Parameters
 - 2.3 WIFI Antenna TRP/TIS
 - 2.4 WIFI Antenna Gain/Efficiency/3D DATA
 - 2.5 Antenna size diagram
3. Conclusions


1. Product Overview

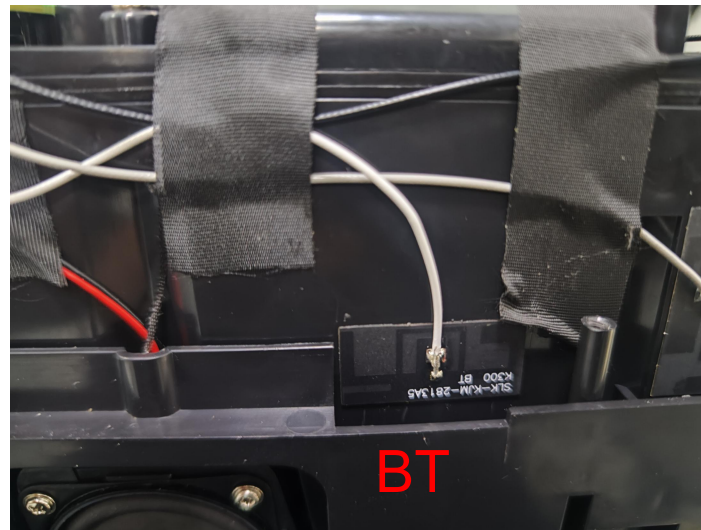

2. Test Result

2.1 VSWR/S11



WIFI 1

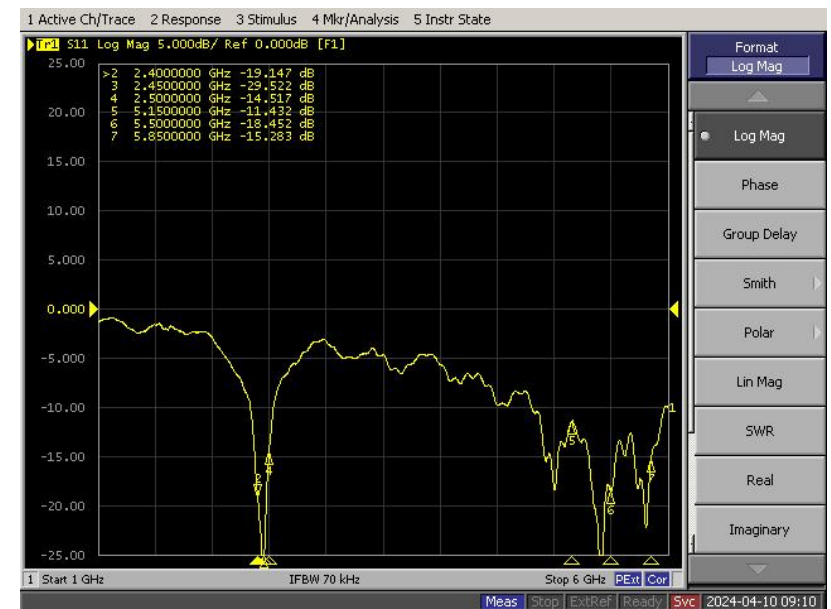

2. Test Result

2.1 VSWR/S11


WIFI 2

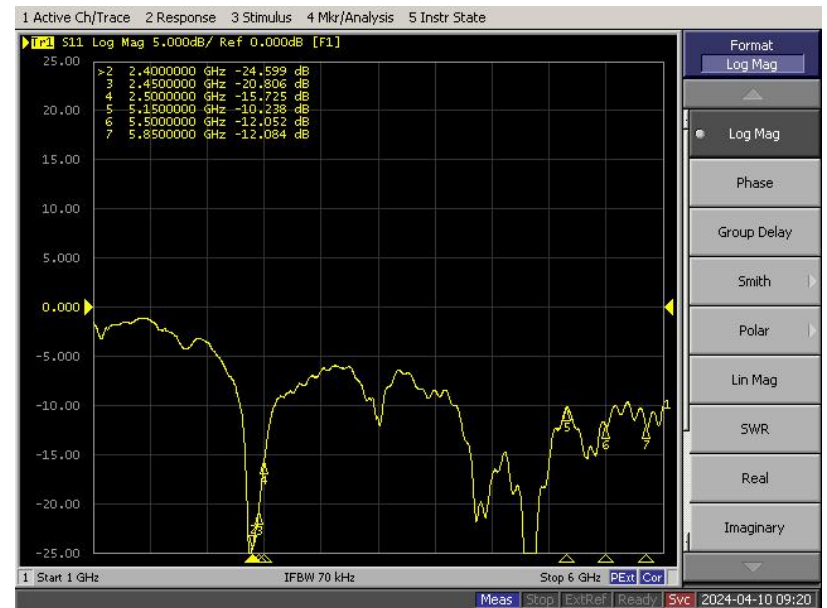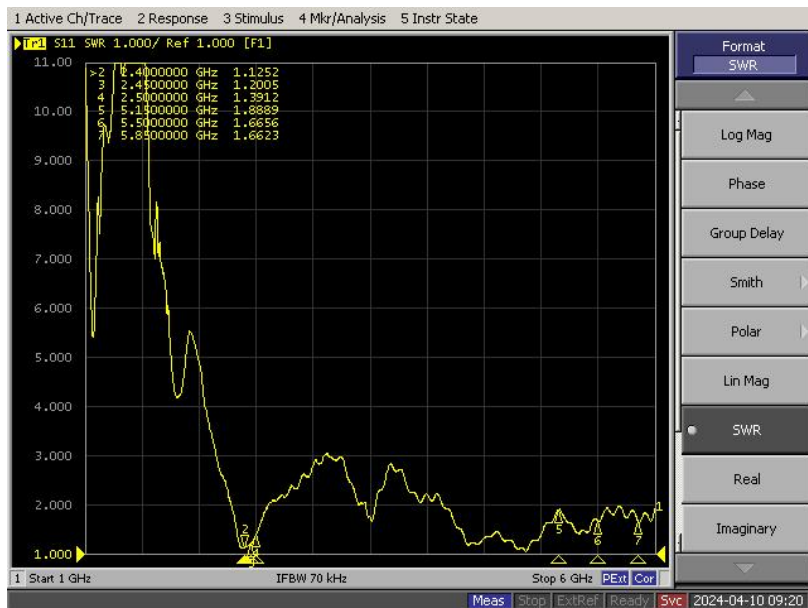

2. Test Result

2.1 VSWR/S11

BT

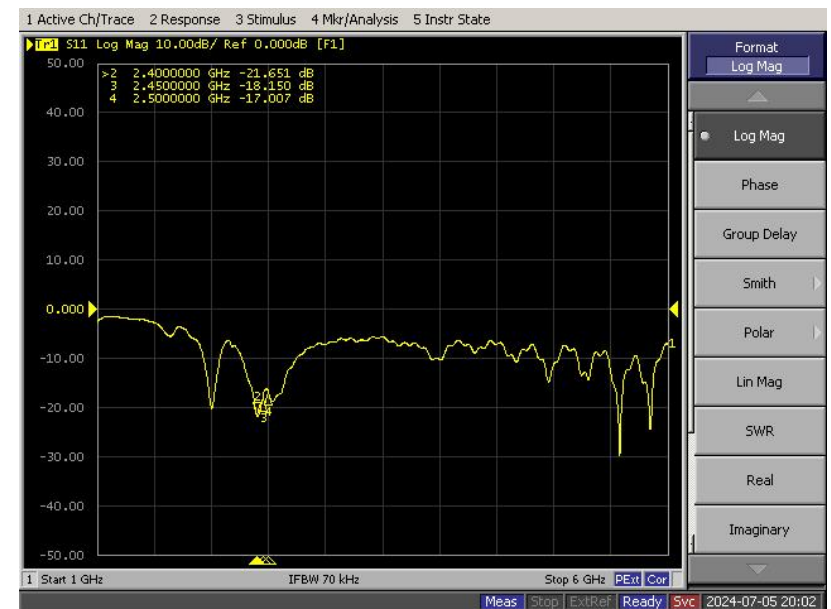

2. Test Result

2.2 Antenna Parameters



2. Test Result

2.3 WIFI Antenna TRP/TIS

WIFI	CH	TRP(54M)	TIS(54M)	WIFI	CH	TRP(54M)	TIS(54M)
802.11a	36	7.05	-69.91	802.11g	1	5.04	-68.63
	149	5.07	-70.54		6	5.26	-69.91
	165	4.09	-70.4		11	5.82	-69.68
WIFI	CH	TRP(11M)	TIS(11M)	WIFI	CH	TRP(MCS7)	TIS(MCS7)
802.11b	1	10.09	-79.84	802.11n	1	5	-67.64
	6	10.26	-80.04		6	5.4	-68.71
	11	10.66	-80.53		11	5.76	-68.66


2. Test Result

2.4 WIFI Antenna Gain/Efficiency/3D DATA


WIFI 1

Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0	5150.0	5350.0	5500.0	5650.0	5850.0
Efficiency (dBi)	-3.02	-2.85	-2.84	-2.77	-2.85	-2.97	-3.04	-2.94	-2.82	-3.09	-3.13	-3.53	-3.22	-3.32	-3.61	-3.51
Gain (dBi)	2.18	2.37	2.54	2.62	2.45	2.20	2.21	2.46	2.32	2.07	1.94	2.41	2.49	2.06	2.88	2.26
Efficiency (%)	49.88	51.92	52.00	52.81	51.91	50.43	49.71	50.79	52.18	49.09	48.69	44.37	47.62	46.56	43.58	44.52


2450.0MHz H+V, Eff: 50.4%

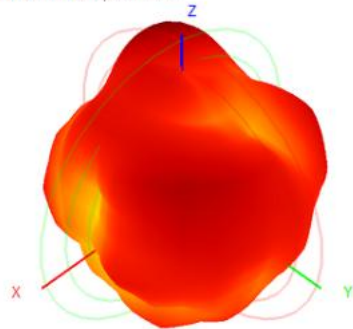


Back View



5850.0MHz H+V, Eff: 44.5%

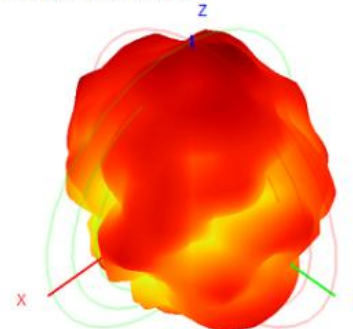

Back View




2. Test Result

2.4 WIFI Antenna Gain/Efficiency/3D DATA


WIFI 2

Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0	5150.0	5350.0	5500.0	5650.0	5850.0
Efficiency (dBi)	-3.61	-3.39	-3.41	-3.24	-3.22	-3.26	-3.40	-3.24	-3.10	-3.23	-3.24	-3.77	-3.48	-3.60	-3.71	-3.70
Gain (dBi)	2.36	2.45	2.30	2.56	2.56	2.70	2.60	2.59	2.65	2.52	2.47	2.56	2.59	2.41	1.67	2.40
Efficiency (%)	43.53	45.81	45.56	47.37	47.65	47.20	45.74	47.47	48.99	47.52	47.43	41.94	44.89	43.70	42.51	42.69


2450.0MHz H+V, Eff: 47.2%

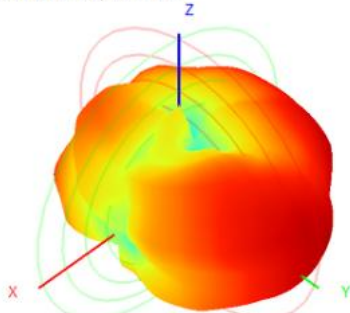


Back View



5850.0MHz H+V, Eff: 42.7%

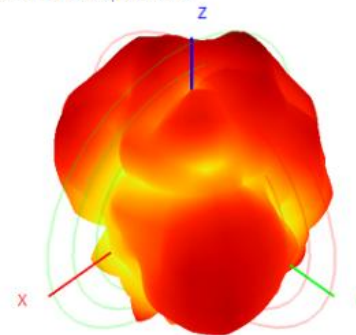

Back View




2. Test Result

2.4 WIFI Antenna Gain/Efficiency/3D DATA


BT

Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-3.42	-3.29	-3.31	-3.31	-3.28	-3.31	-3.31	-3.26	-3.12	-3.14	-3.57
Gain (dBi)	1.85	1.94	2.00	2.10	2.30	2.25	1.85	2.29	2.67	2.61	2.67
Efficiency (%)	45.49	46.85	46.56	46.60	46.93	46.64	46.60	47.17	48.64	48.51	43.85

2450.0MHz H+V, Eff. 46.6%

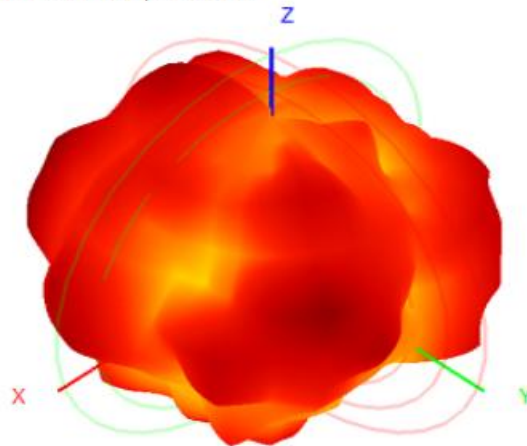


Back View

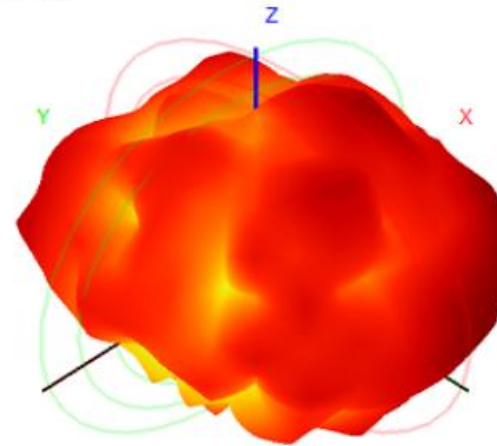

2. Test Result

2.5 Antenna size diagram


WIFI 1

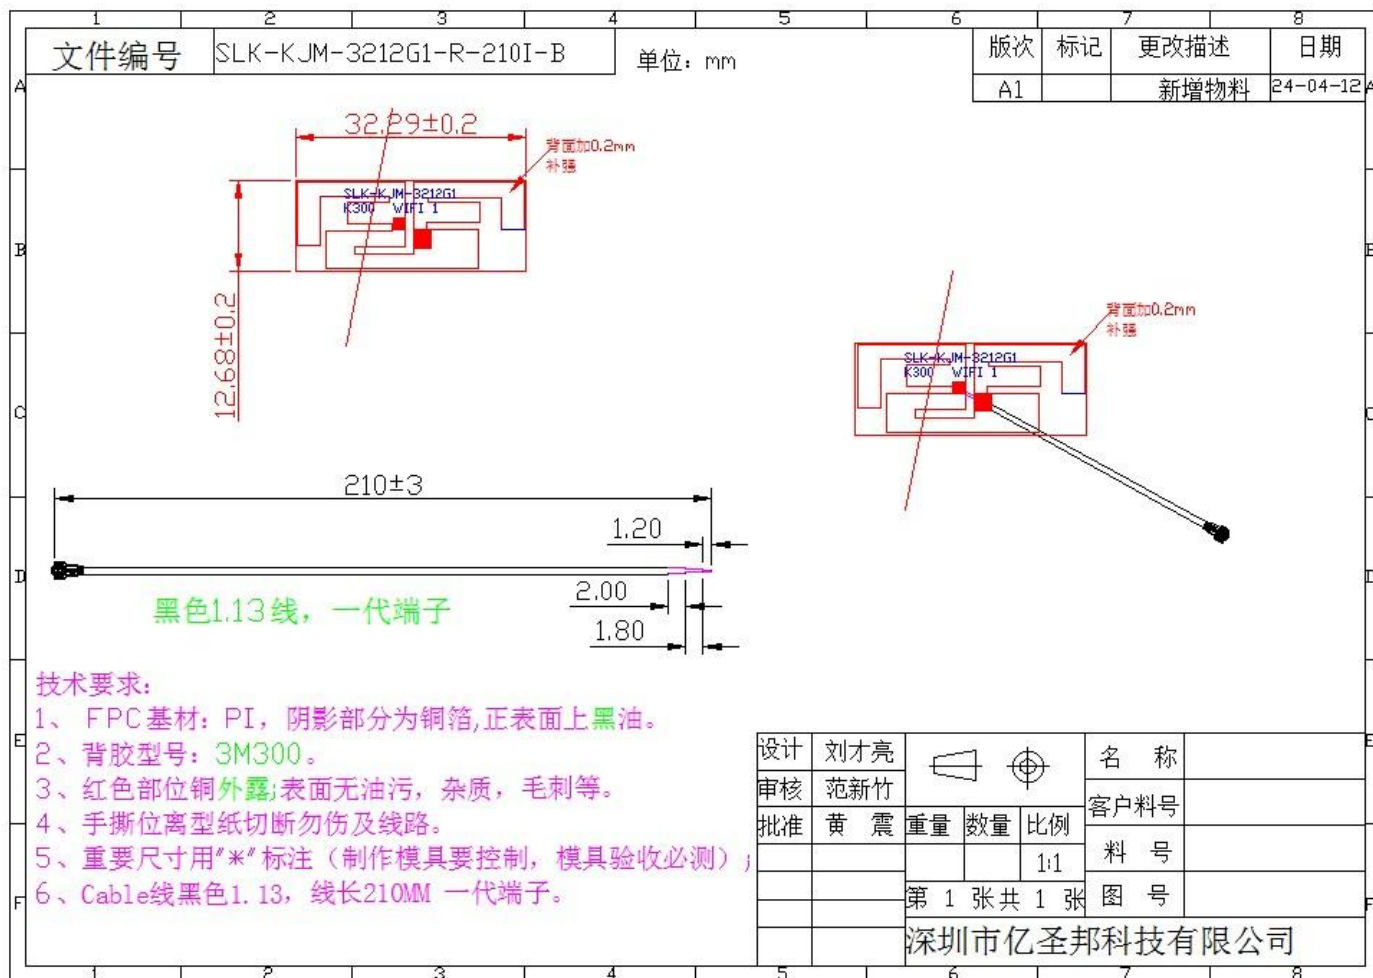

2. Test Result

2.5 Antenna size diagram


WIFI 2

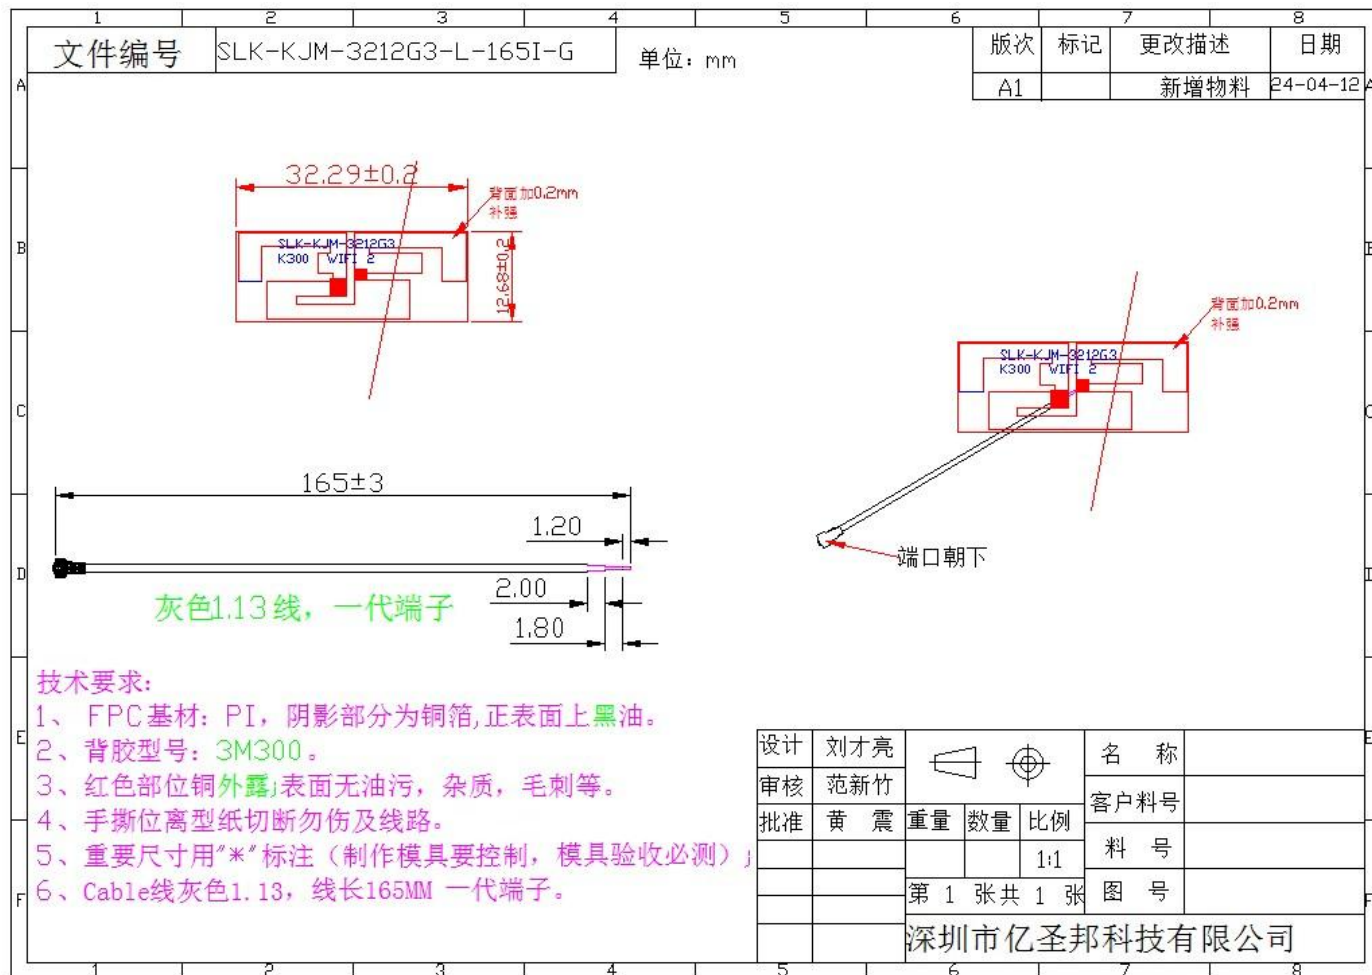

2. Test Result

2.5 Antenna size diagram

BT

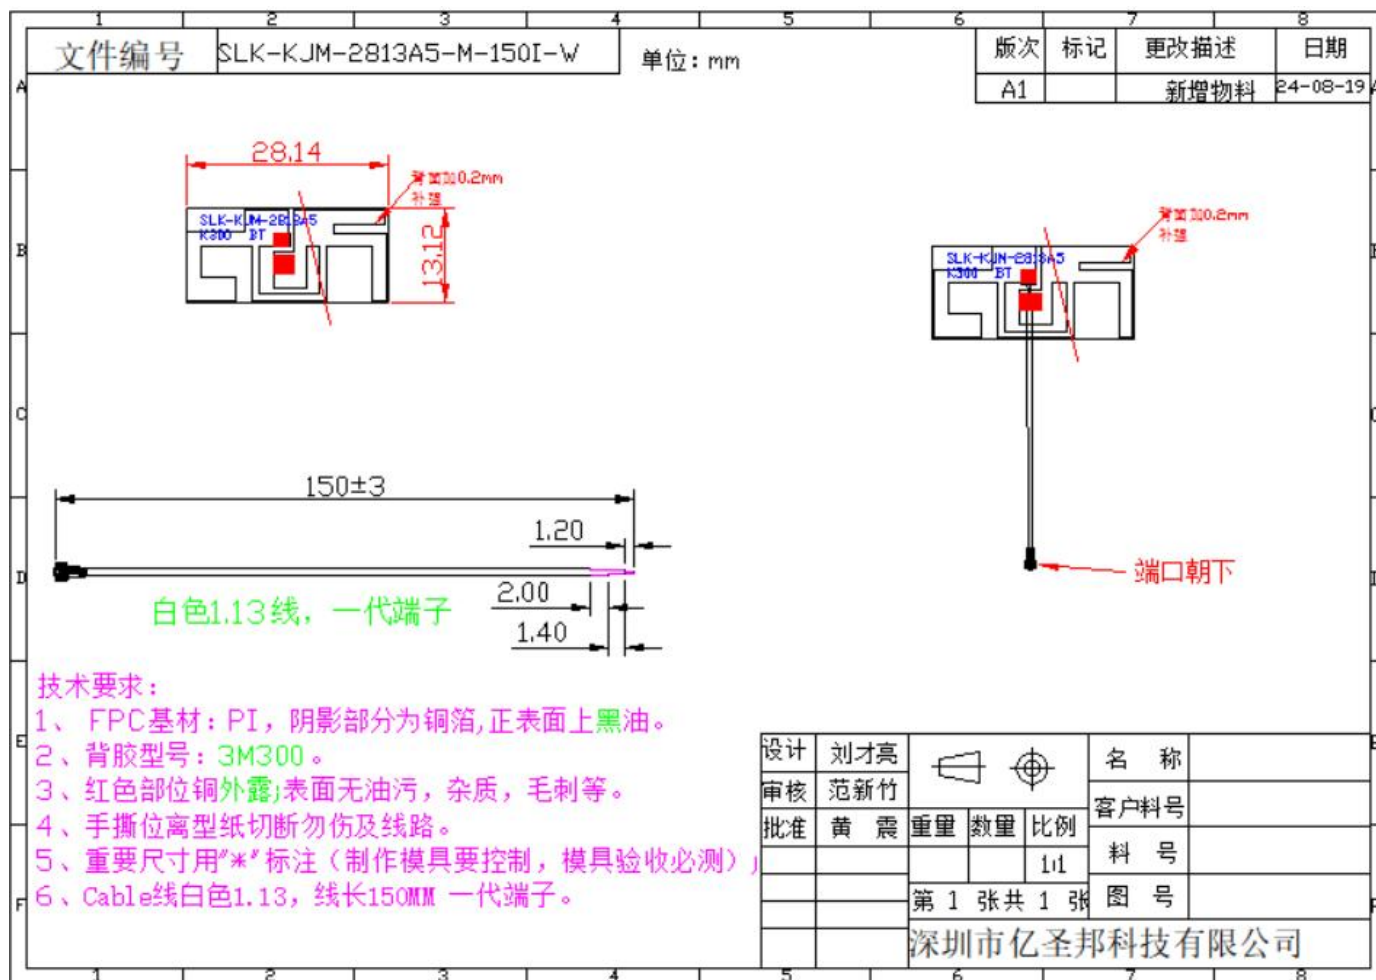

3. Conclusions

Supplier Address: 101, Building
C, Qianwan Hard Technology
Industrial Park, Nanchang
Community, Xixiang Street,
Bao'an District, Shenzhen