


Maximum location: X=16.00, Y=-55.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.040878
SAR 1g (W/Kg)	0.046629

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0680	0.0479	0.0402	0.0370	0.0322

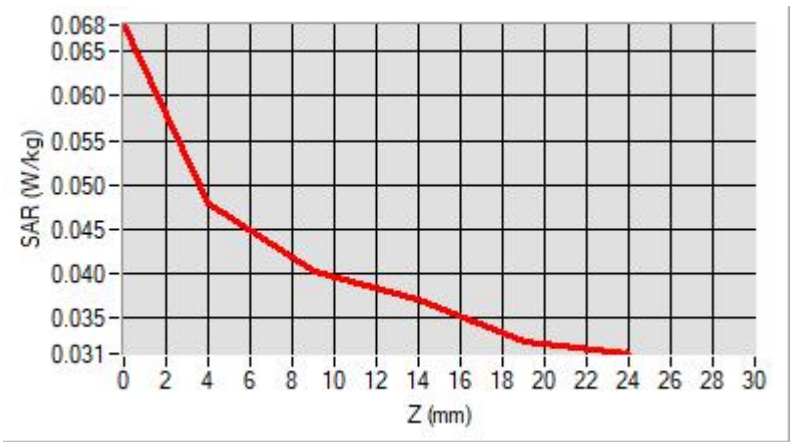

F. 3D Image

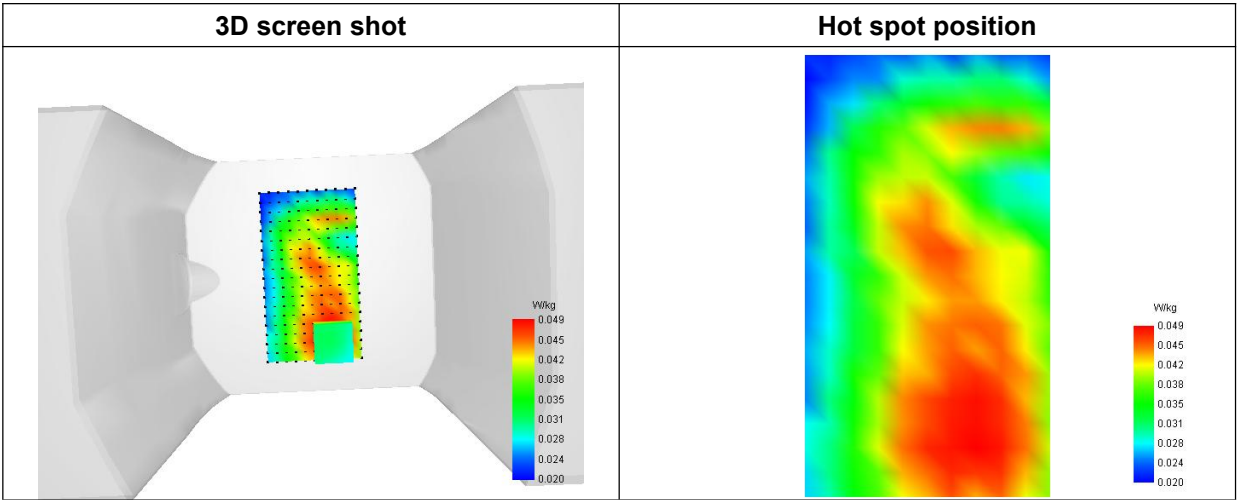

MEASUREMENT 35/54

Type: Measurement (Complete)
Date of measurement: 2025-04-07
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.08; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 17
Channels	QPSK, 10MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	711.000000
Relative Permittivity (real part)	41.174156
Conductivity (S/m)	0.873182
Power Variation (%)	0.861700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

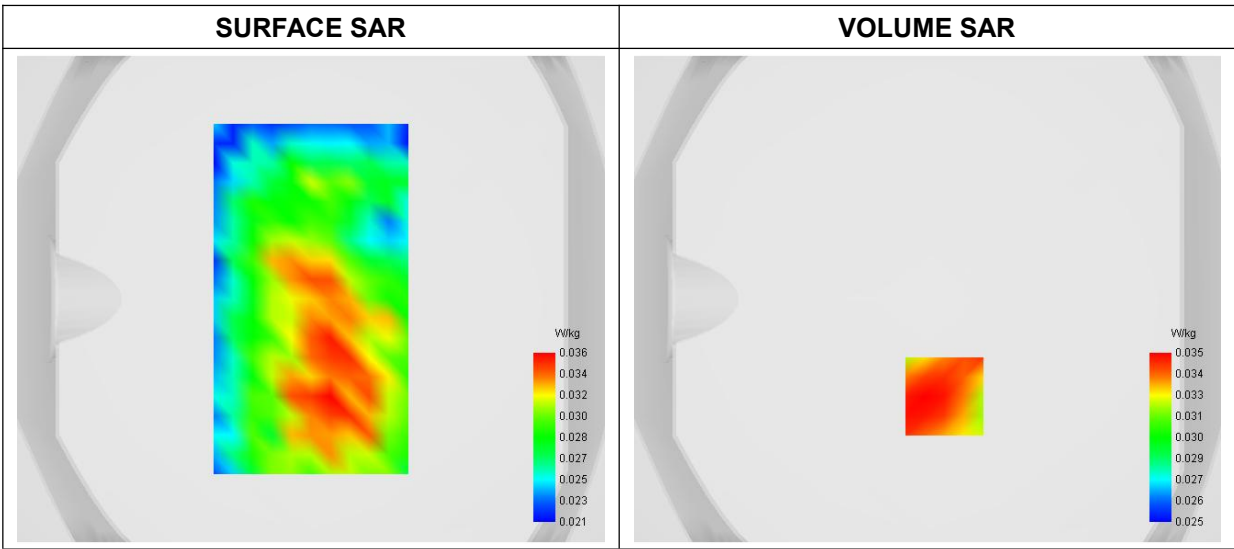


Maximum location: X=7.00, Y=-40.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.031847
SAR 1g (W/Kg)	0.036181

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0384	0.0354	0.0308	0.0278	0.0272

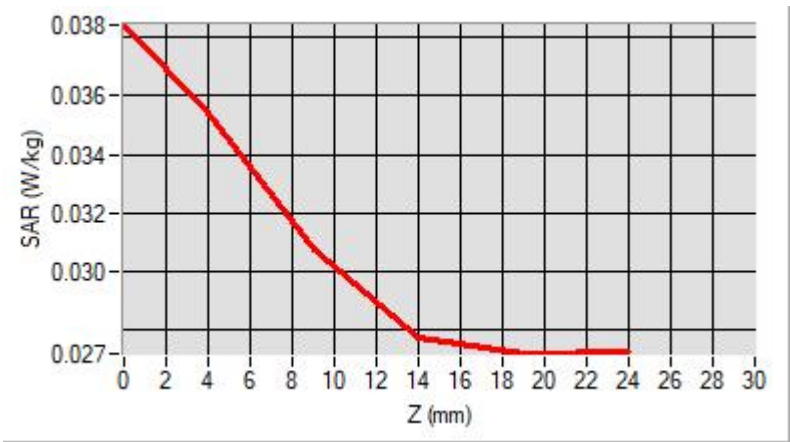

F. 3D Image

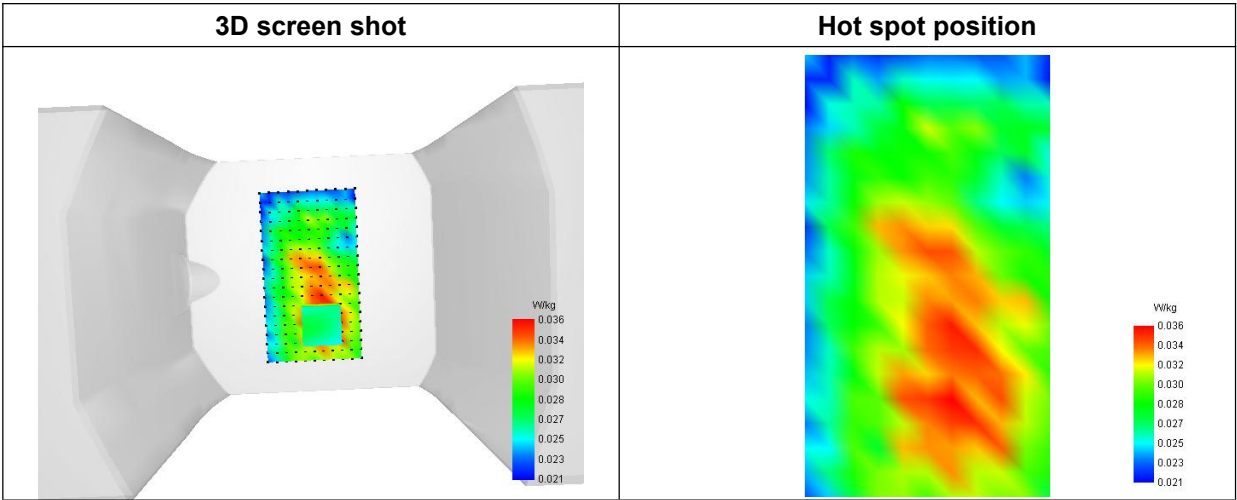

MEASUREMENT 36

Type: Measurement (Complete)
Date of measurement: 2025-03-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.36; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 38
Channels	QPSK, 20MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2610.000000
Relative Permittivity (real part)	39.734266
Conductivity (S/m)	1.941828
Power Variation (%)	0.354300
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

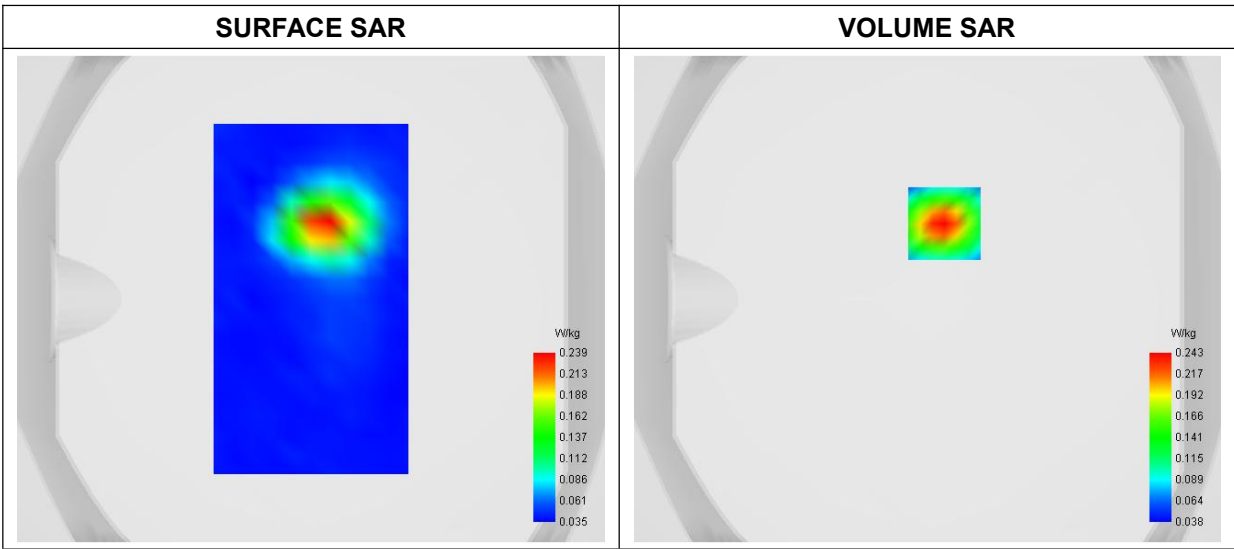


Maximum location: X=7.00, Y=31.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.121895
SAR 1g (W/Kg)	0.222492

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.4071	0.2430	0.1465	0.0953	0.0706

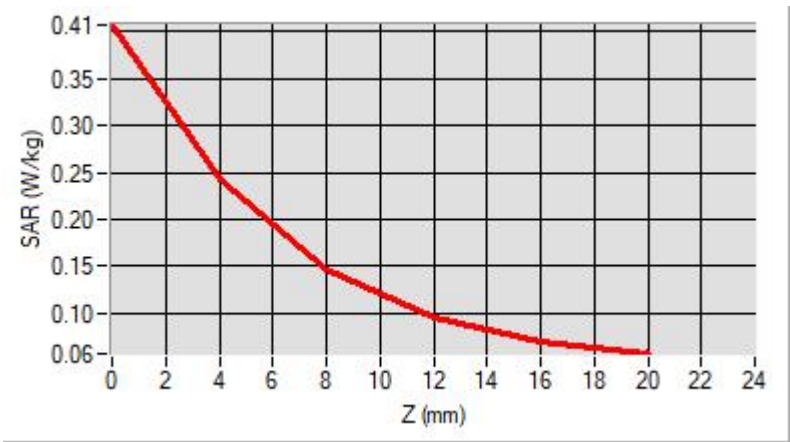

F. 3D Image

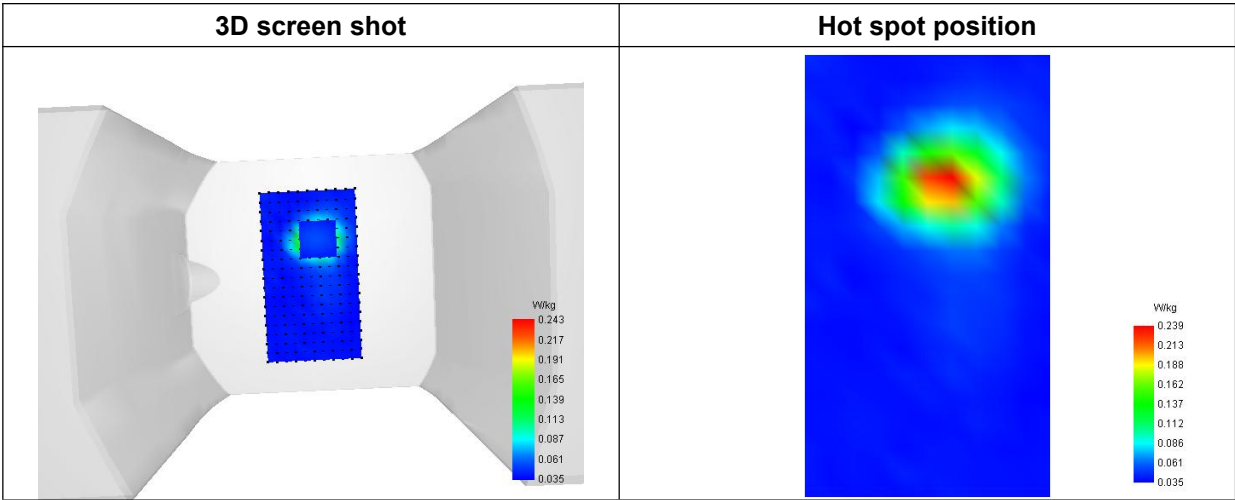

MEASUREMENT 37/56

Type: Measurement (Complete)
Date of measurement: 2025-03-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.44; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 40(2305-2315MHz)
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2310.000000
Relative Permittivity (real part)	38.941327
Conductivity (S/m)	1.642987
Power Variation (%)	-1.378500
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

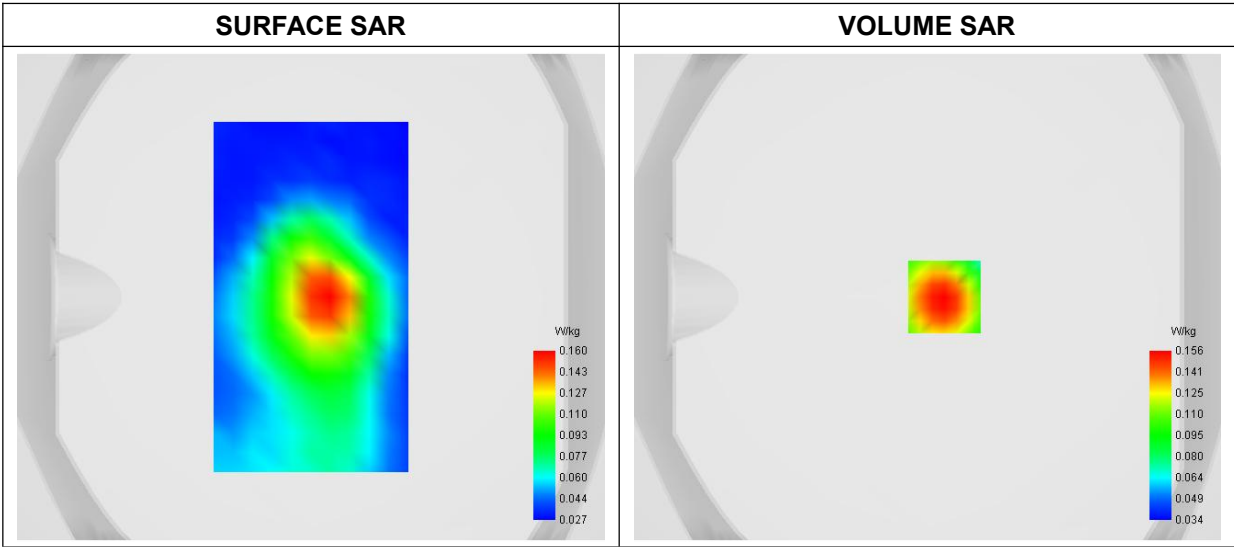


Maximum location: X=7.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.095159
SAR 1g (W/Kg)	0.148139

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2353	0.1560	0.1055	0.0759	0.0596

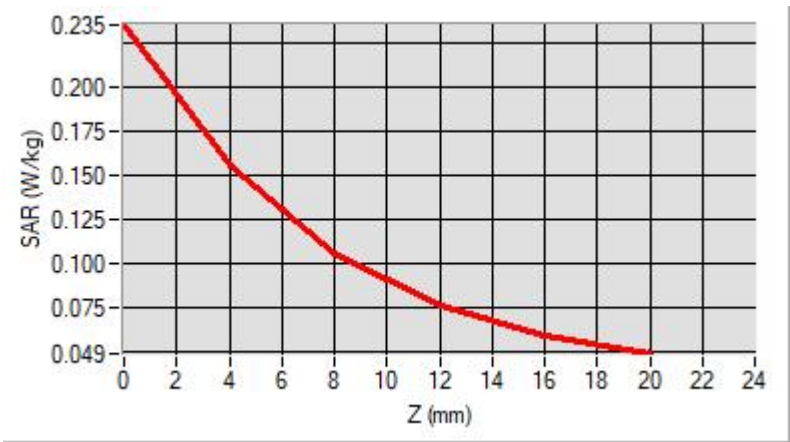

F. 3D Image

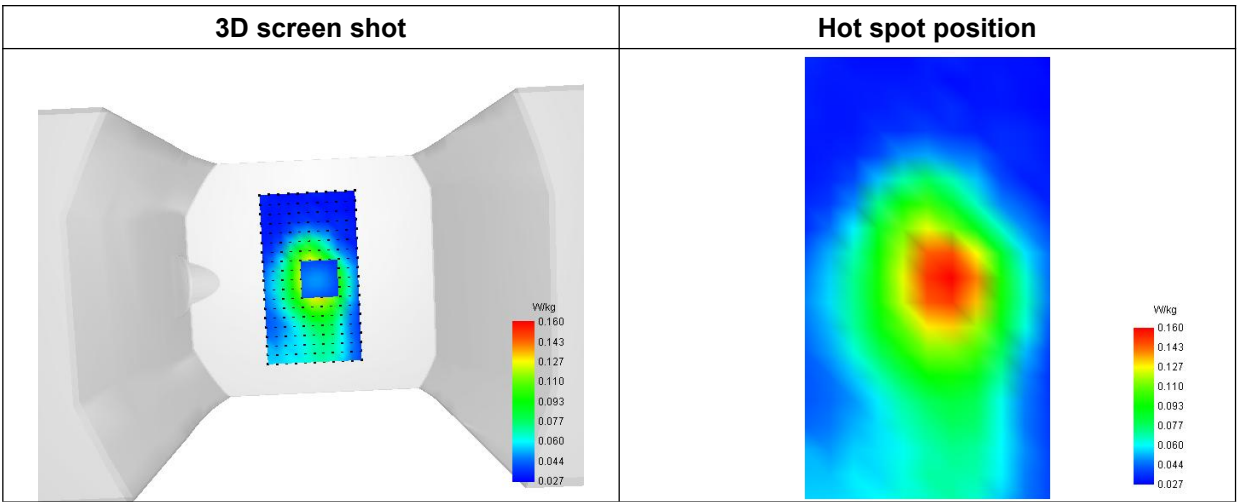

MEASUREMENT 38/57

Type: Measurement (Complete)
Date of measurement: 2025-03-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.44; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 40(2350-2360MHz)
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2355.000000
Relative Permittivity (real part)	38.944254
Conductivity (S/m)	1.641419
Power Variation (%)	-1.329200
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

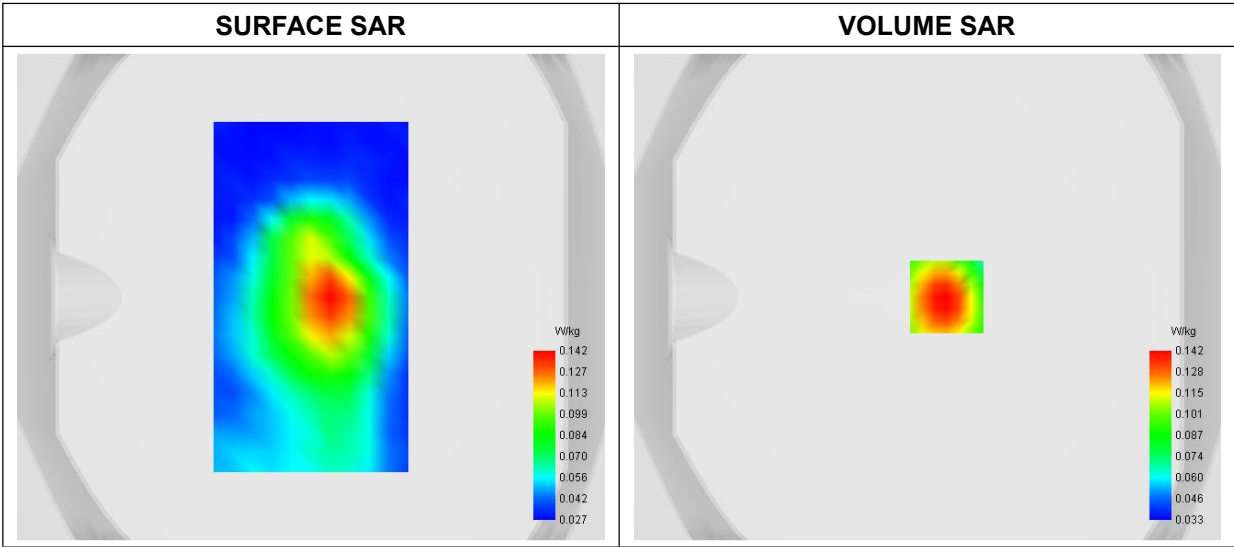


Maximum location: X=8.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.086705
SAR 1g (W/Kg)	0.134897

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2122	0.1420	0.0968	0.0697	0.0544

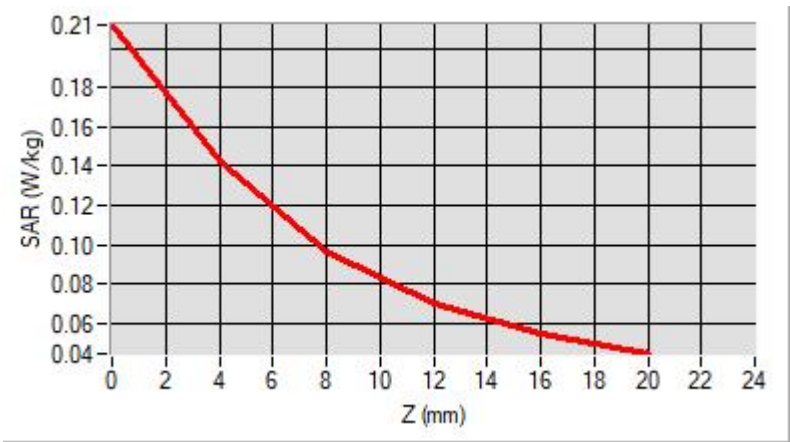

F. 3D Image

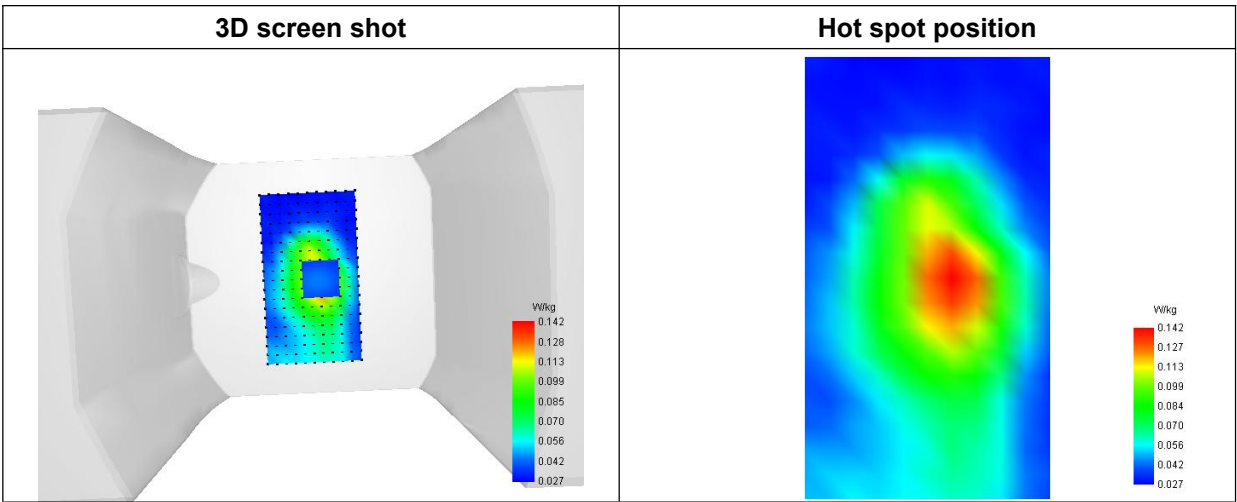

MEASUREMENT 39

Type: Measurement (Complete)
Date of measurement: 2025-03-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.44; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative Permittivity (real part)	39.461325
Conductivity (S/m)	1.382987
Power Variation (%)	-1.329200
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

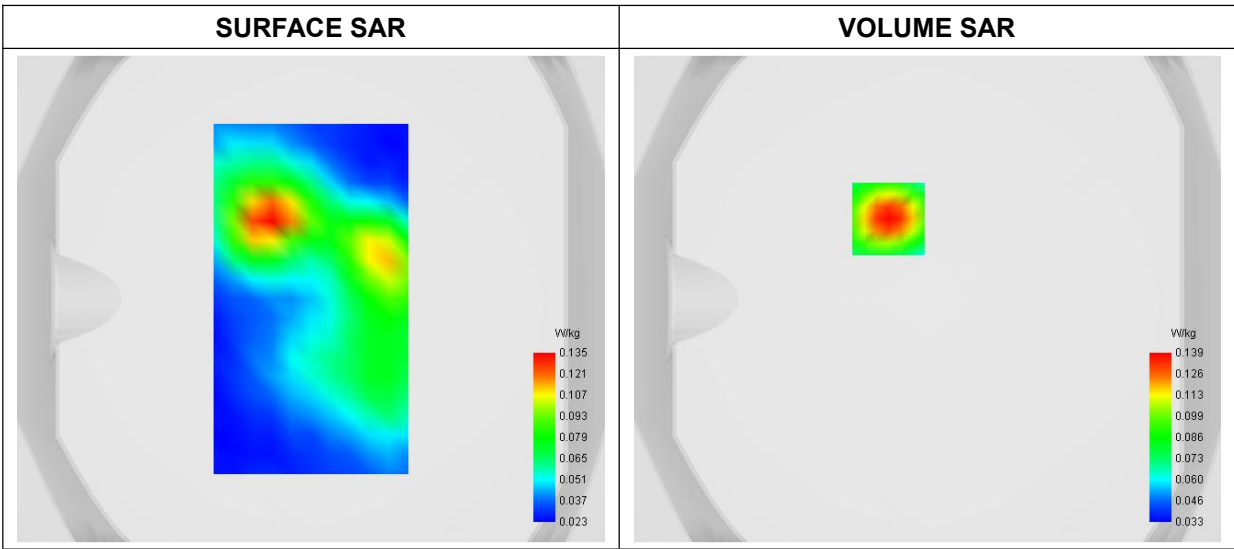


Maximum location: X=-16.00, Y=33.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.082320
SAR 1g (W/Kg)	0.130119

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2091	0.1392	0.0946	0.0684	0.0540

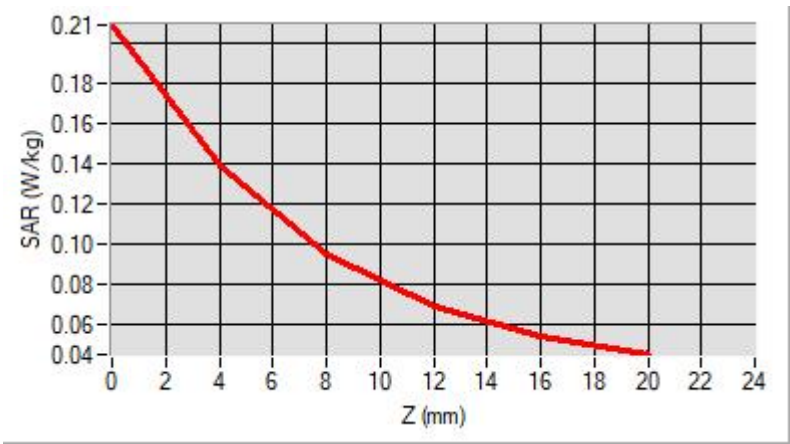

F. 3D Image

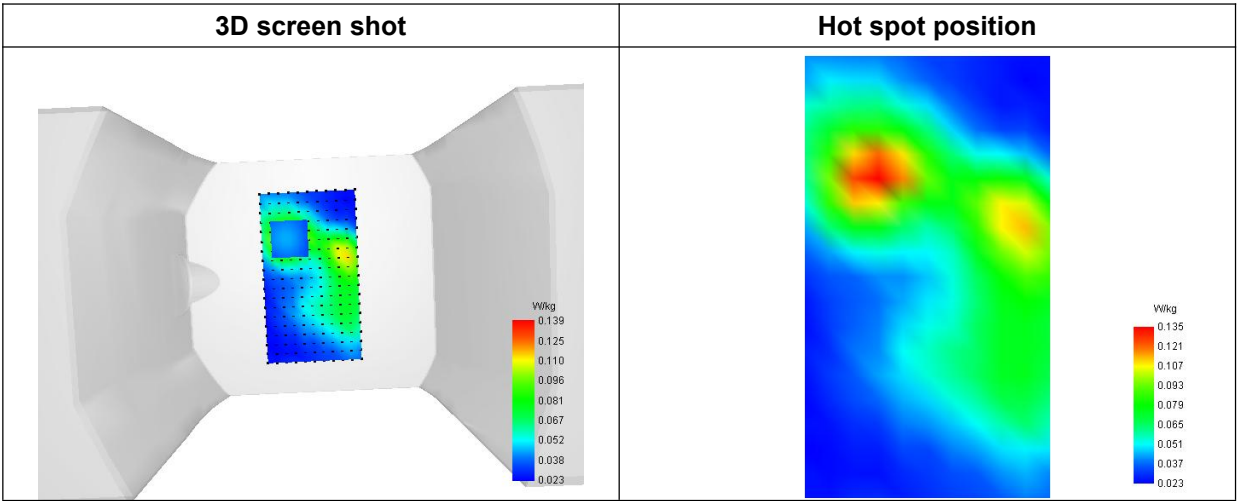

MEASUREMENT 40/58

Type: Measurement (Complete)
Date of measurement: 2025-04-05
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.45; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	WiFi_802.11b
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative Permittivity (real part)	38.474231
Conductivity (S/m)	1.773163
Power Variation (%)	0.368900
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

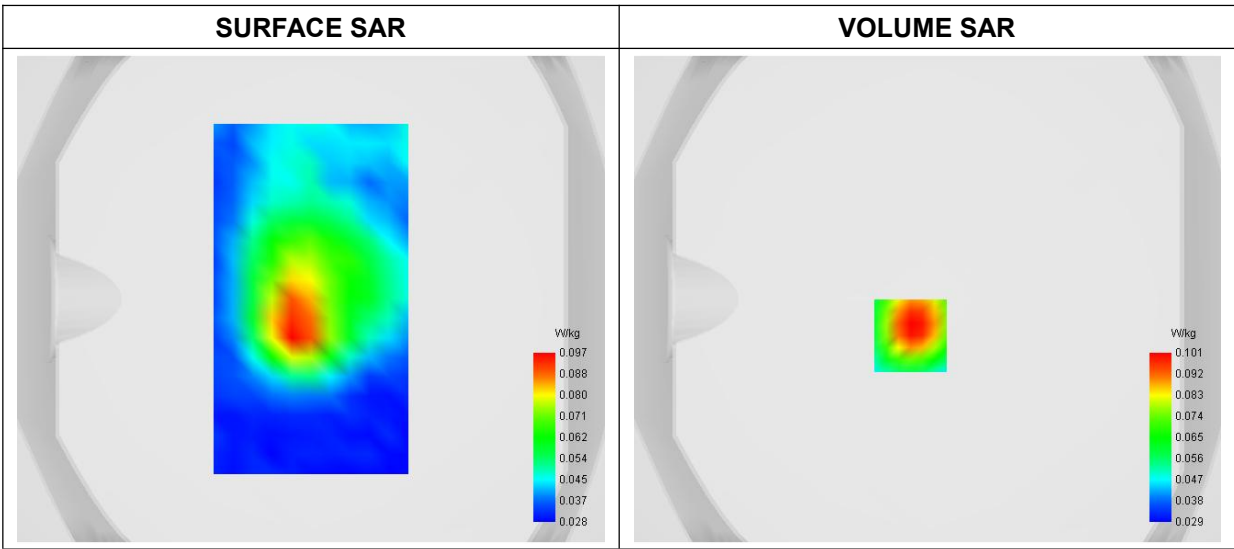


Maximum location: X=-7.00, Y=-15.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.062668
SAR 1g (W/Kg)	0.096442

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2355	0.1006	0.0600	0.0488	0.0385

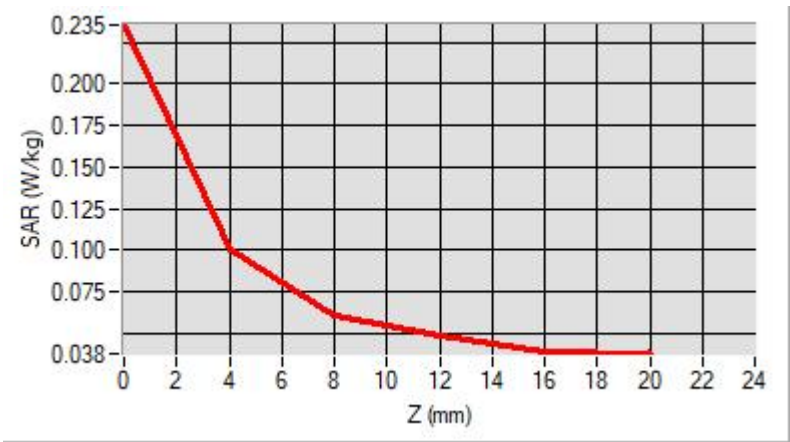

F. 3D Image

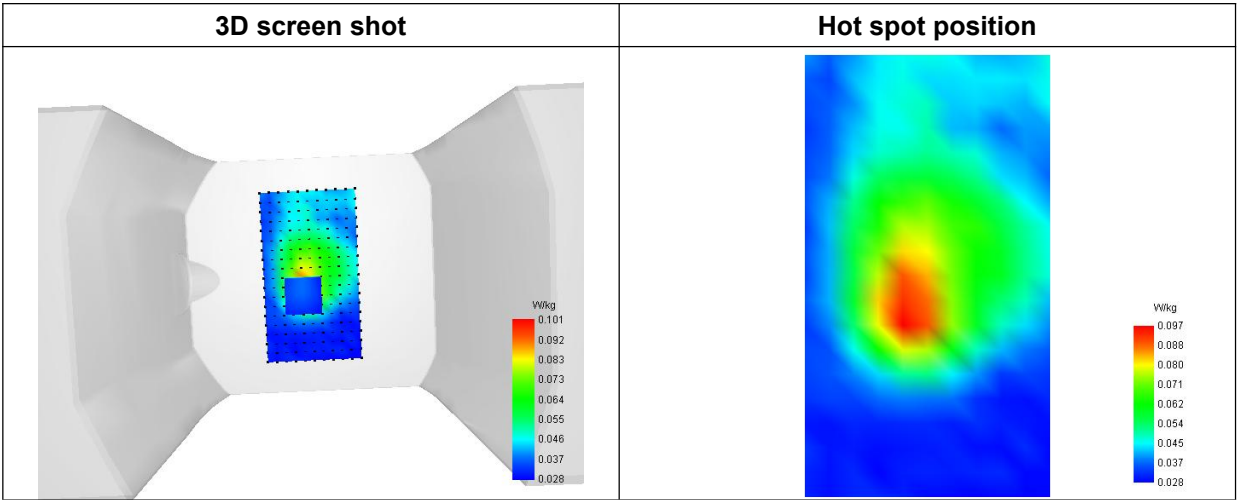

MEASUREMENT 41

Type: Measurement (Complete)
Date of measurement: 2025-04-05
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.56; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5180.000000
Relative Permittivity (real part)	35.242386
Conductivity (S/m)	4.634161
Power Variation (%)	-1.526900
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

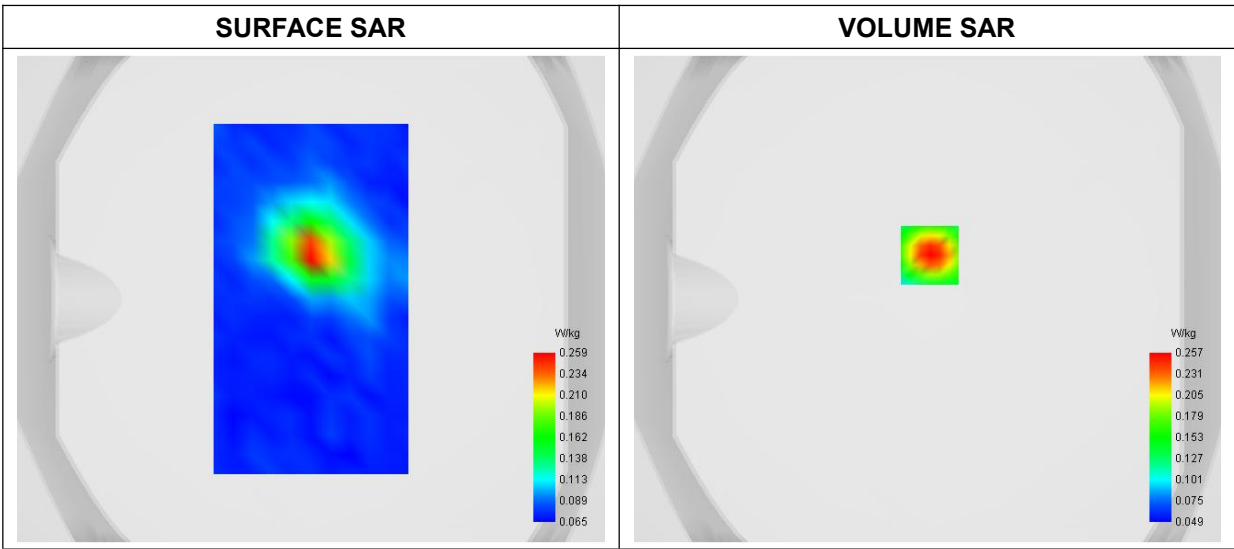


Maximum location: X=1.00, Y=18.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.098858
SAR 1g (W/Kg)	0.165547

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.4170	0.2566	0.1545	0.0958	0.0666	0.0543	0.0525	0.0583	0.0698

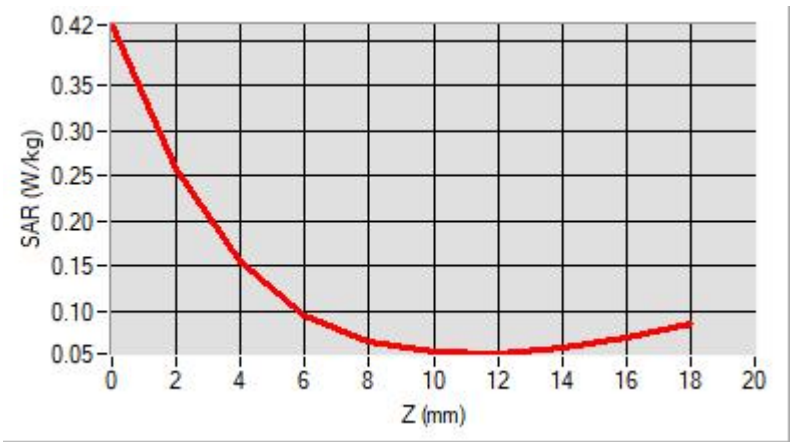

F. 3D Image

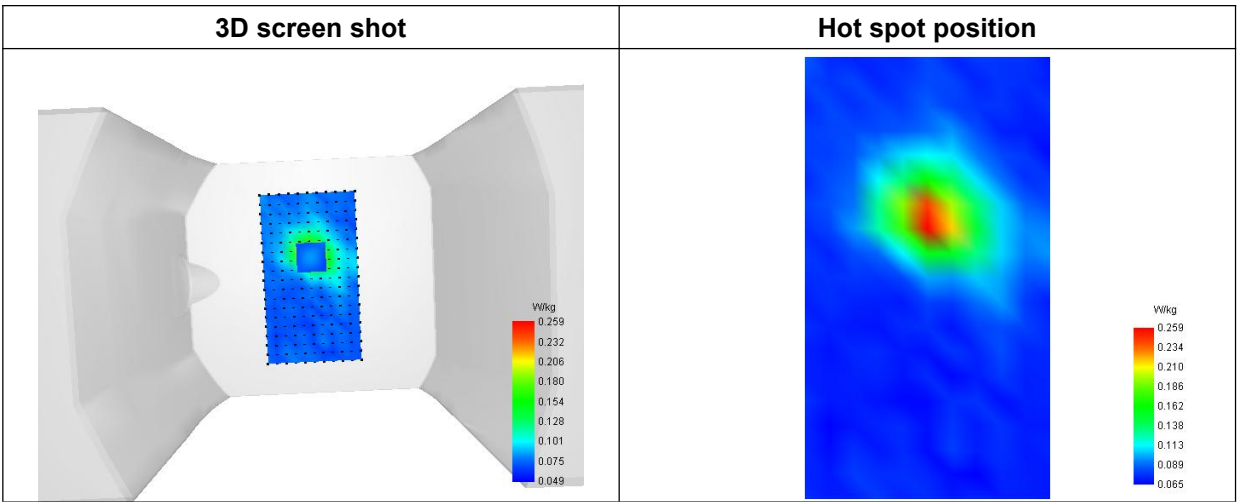

MEASUREMENT 42

Type: Measurement (Complete)
Date of measurement: 2025-04-05
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.56; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.3GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5260.000000
Relative Permittivity (real part)	35.242839
Conductivity (S/m)	4.631926
Power Variation (%)	1.118500
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

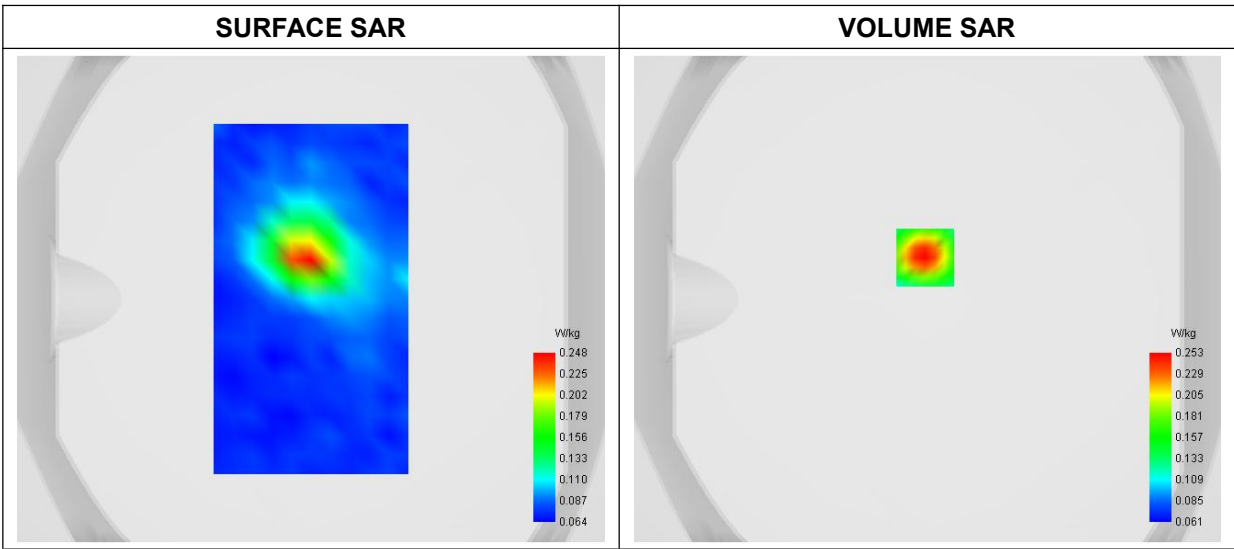


Maximum location: X=-1.00, Y=17.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.105025
SAR 1g (W/Kg)	0.170351

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.3777	0.2531	0.1698	0.1175	0.0878	0.0724	0.0661	0.0658	0.0694

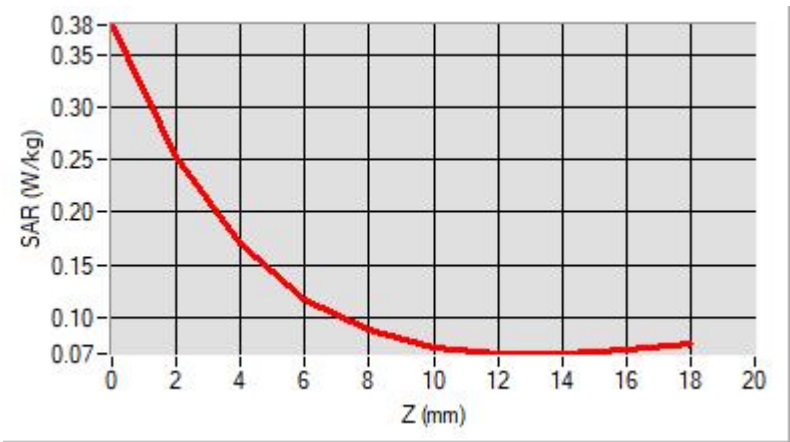

F. 3D Image

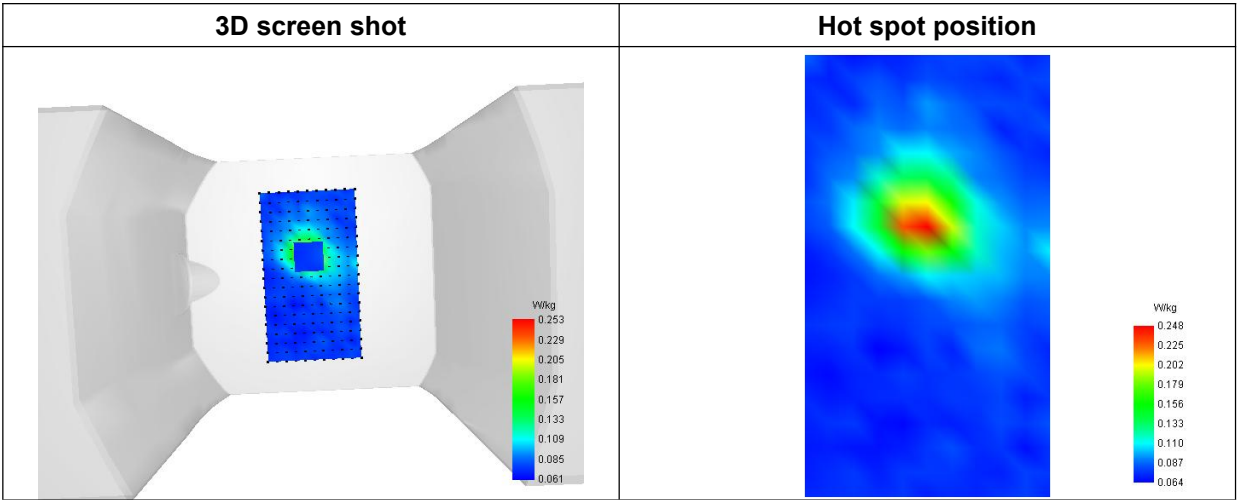

MEASUREMENT 43

Type: Measurement (Complete)
Date of measurement: 2025-04-06
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.57; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.6GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5500.000000
Relative Permittivity (real part)	36.133296
Conductivity (S/m)	5.102781
Power Variation (%)	0.758600
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

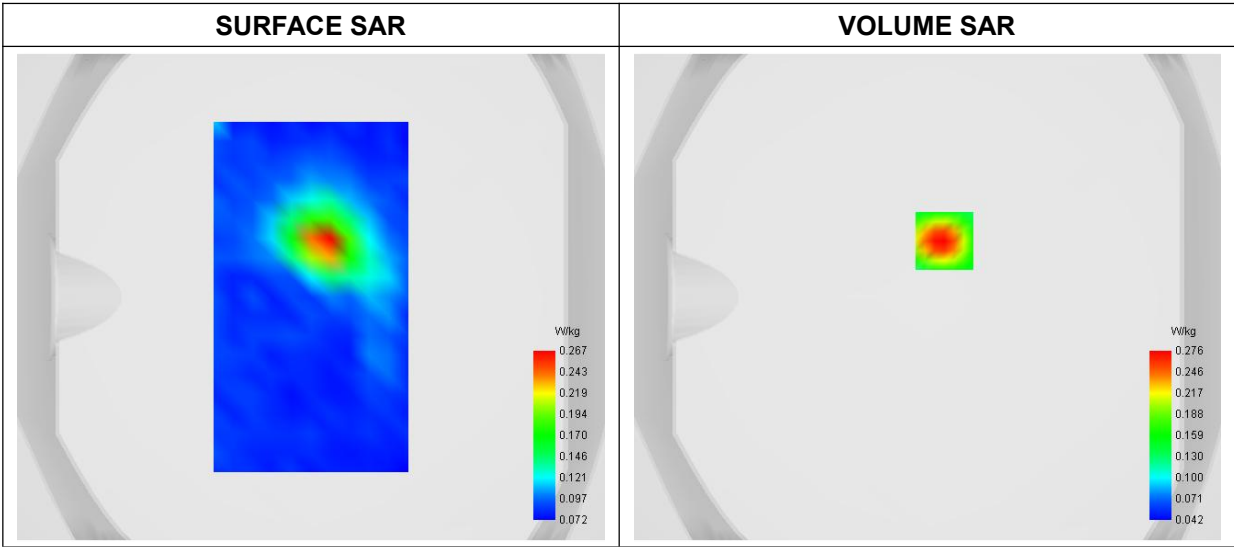


Maximum location: X=7.00, Y=23.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.100758
SAR 1g (W/Kg)	0.173972

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.4705	0.2757	0.1543	0.0876	0.0560	0.0435	0.0422	0.0489	0.0621

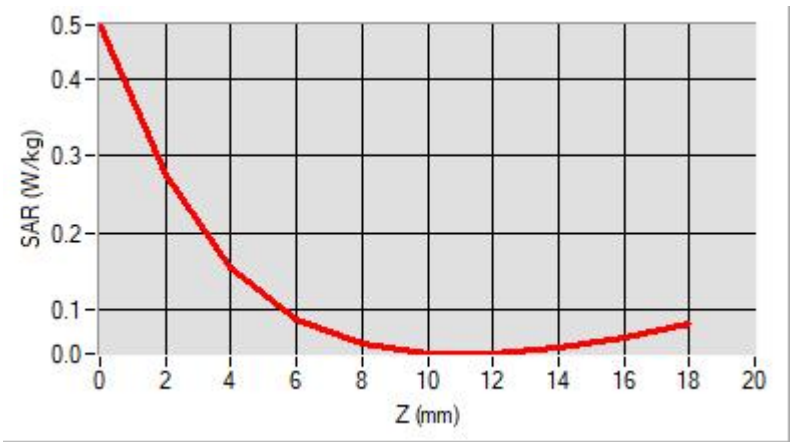

F. 3D Image

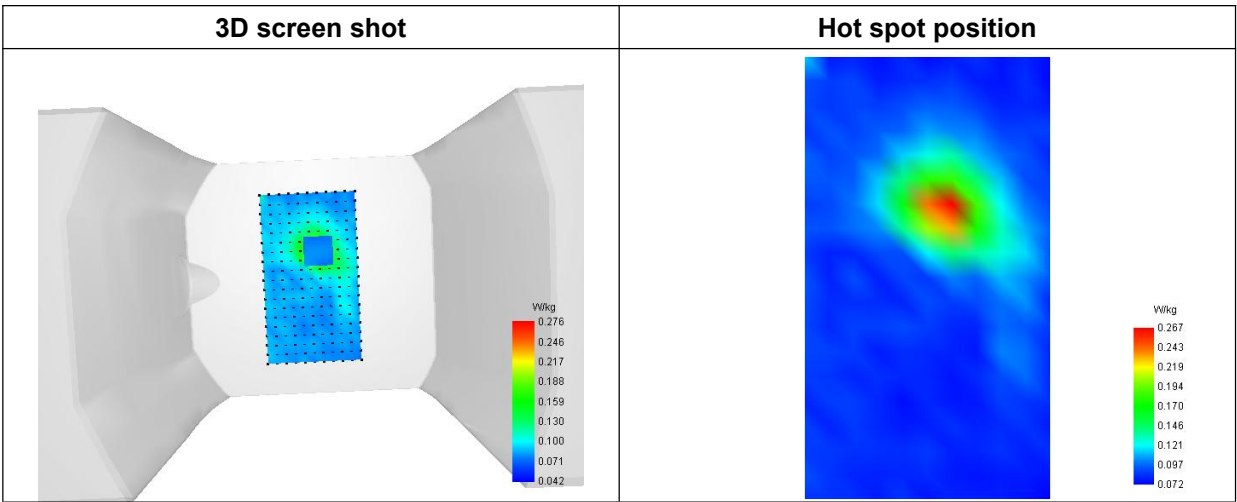

MEASUREMENT 44

Type: Measurement (Complete)
Date of measurement: 2025-04-06
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.58; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5745.000000
Relative Permittivity (real part)	36.744273
Conductivity (S/m)	5.293836
Power Variation (%)	-1.335400
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

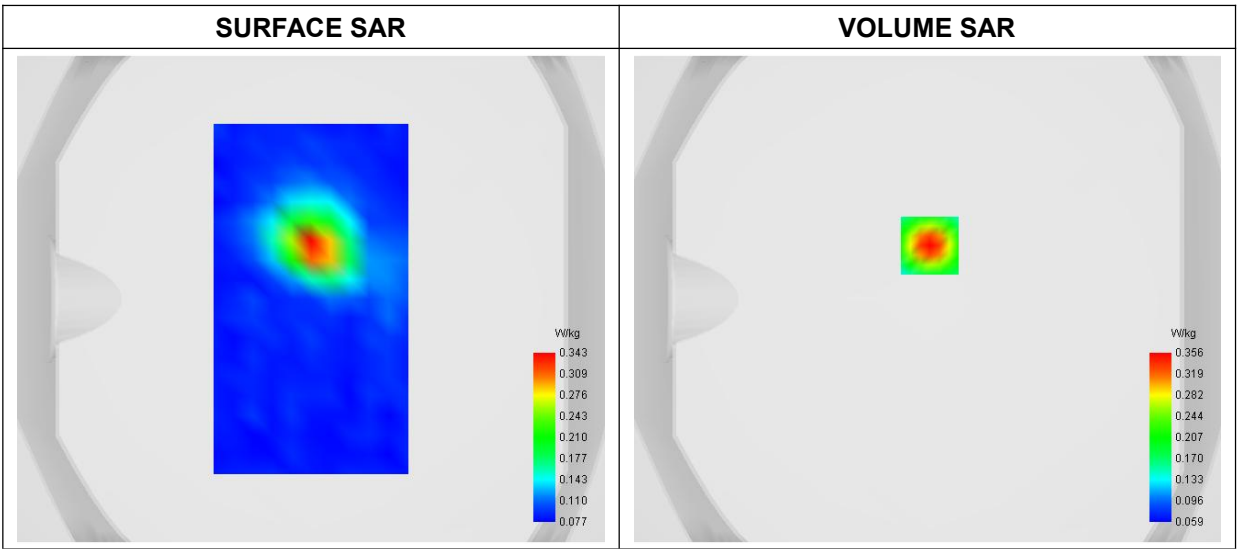


Maximum location: X=1.00, Y=22.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.119701
SAR 1g (W/Kg)	0.220090

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.5796	0.3557	0.2126	0.1290	0.0857	0.0656	0.0590	0.0613	0.0698

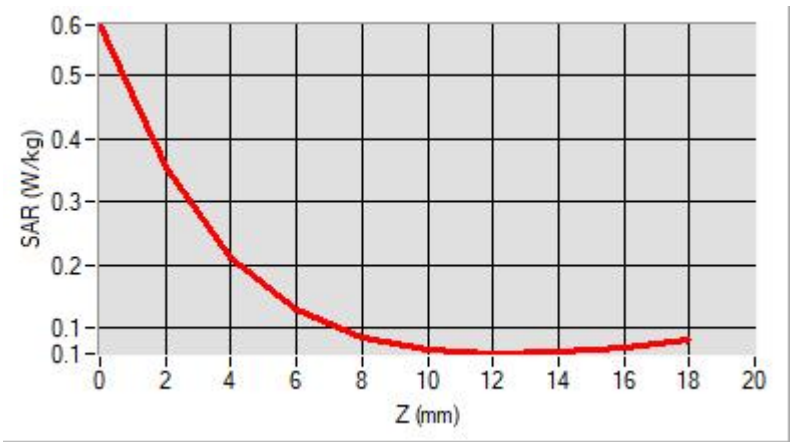

F. 3D Image

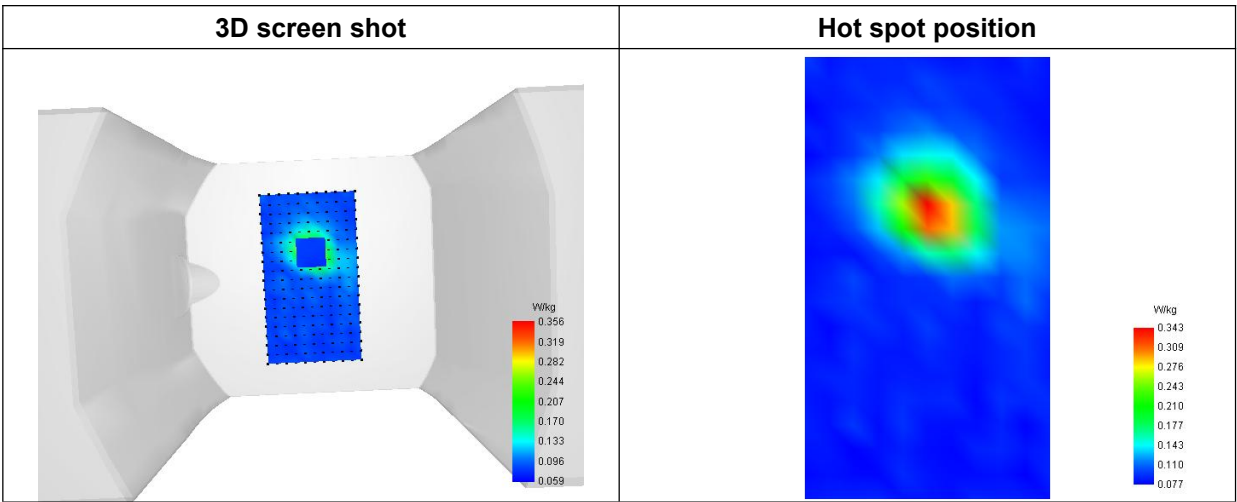

MEASUREMENT 45

Type: Measurement (Complete)
Date of measurement: 2025-04-07
Measurement duration: 11 minutes 48 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 0.99; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=8mm dy=8mm dz=5mm
Phantom	Flat plane
Device Position	Back
Band	GPRS850_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	41.173224
Conductivity (S/m)	0.871245
Power Variation (%)	1.185700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

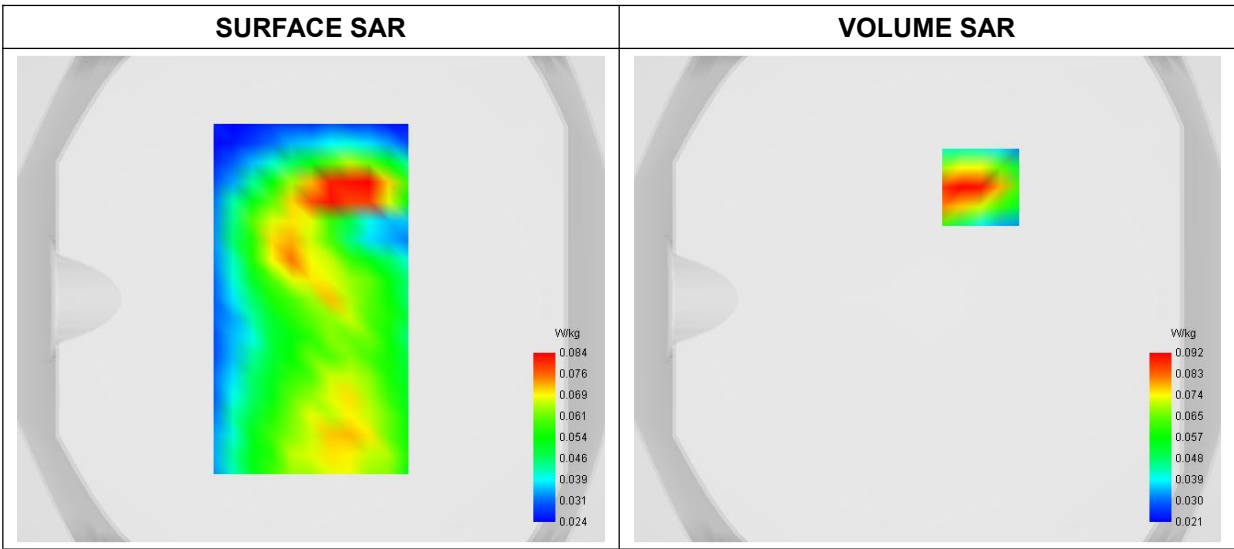


Maximum location: X=22.00, Y=46.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.056578
SAR 1g (W/Kg)	0.087270

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2105	0.0919	0.0509	0.0430	0.0299

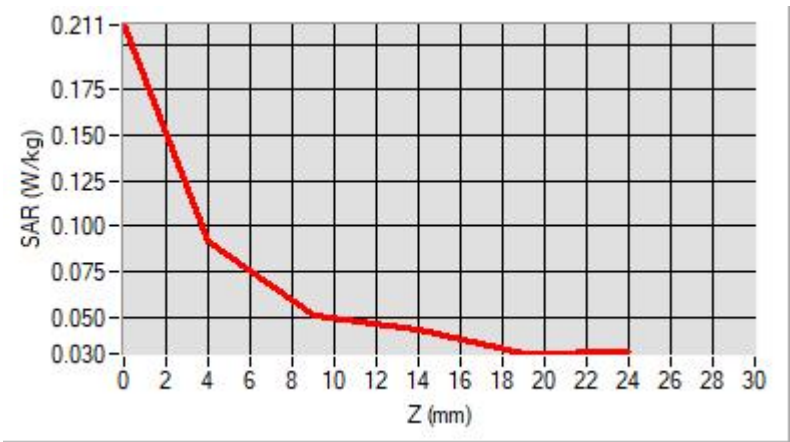

F. 3D Image

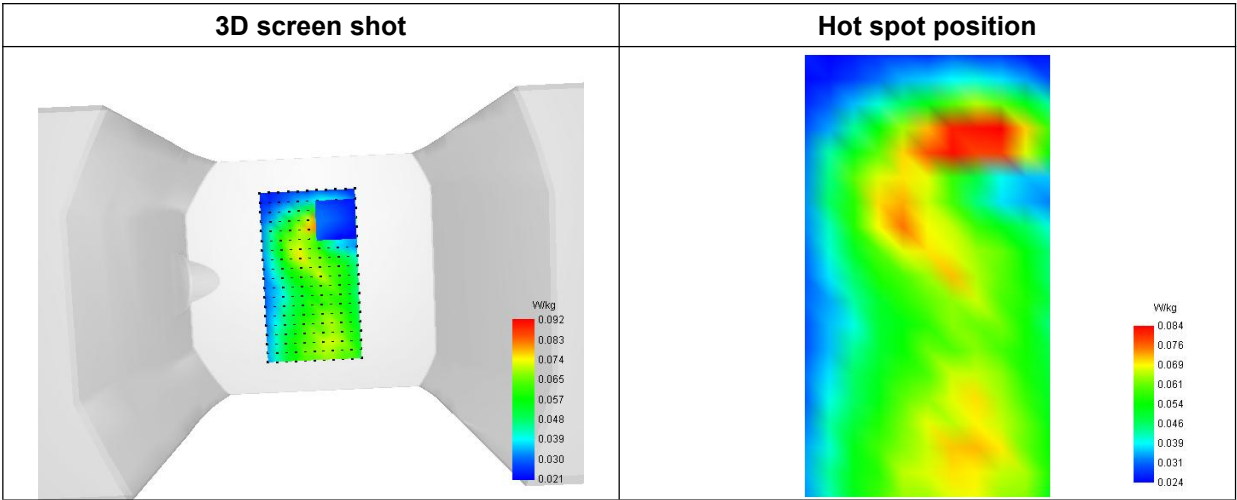

MEASUREMENT 46

Type: Measurement (Complete)
Date of measurement: 2025-03-29
Measurement duration: 11 minutes 48 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.23; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat plane
Device Position	Front
Band	GPRS1900_3TX
Channels	Low
Signal	Duty Cycle: 1:2.66

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	39.461224
Conductivity (S/m)	1.382081
Power Variation (%)	-0.737400
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

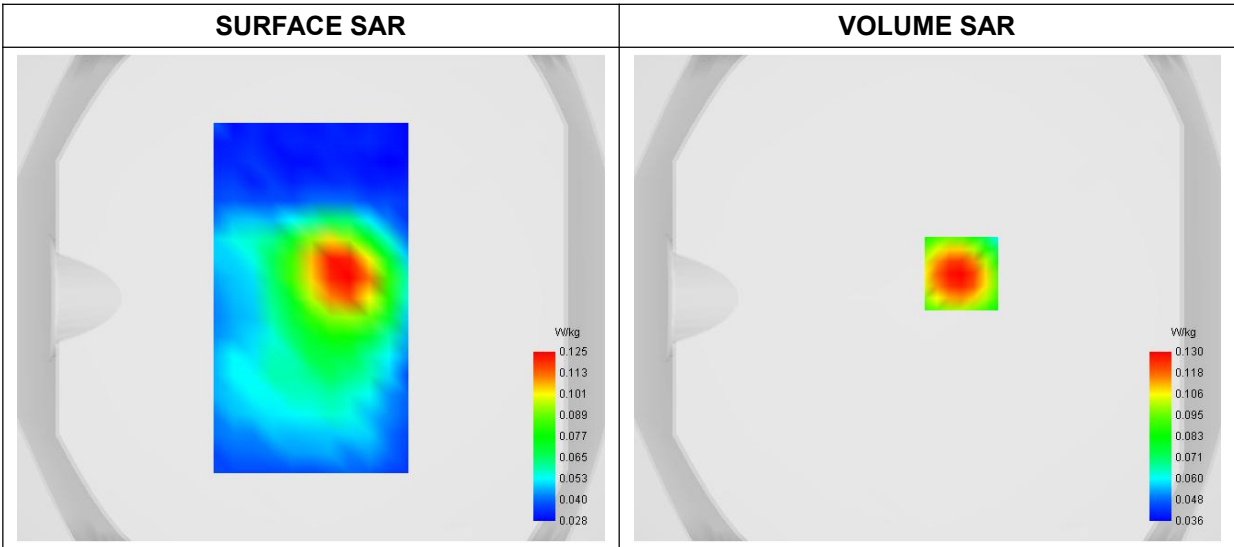


Maximum location: X=14.00, Y=10.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.084232
SAR 1g (W/Kg)	0.123312

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.1887	0.1297	0.0919	0.0701	0.0586

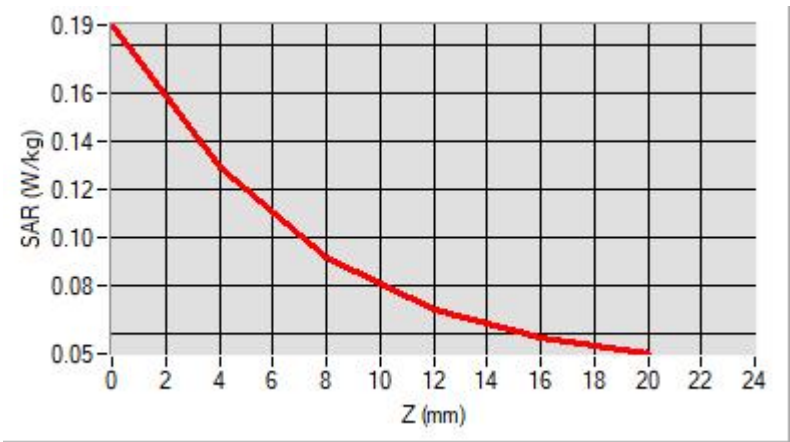

F. 3D Image

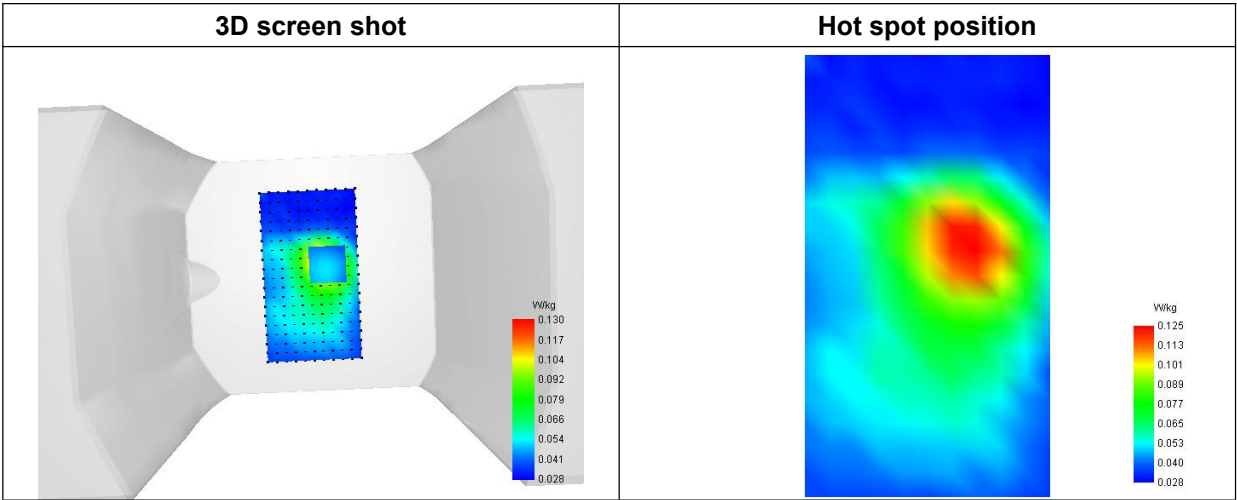

MEASUREMENT 47

Type: Measurement (Complete)
Date of measurement: 2025-03-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.23; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1700_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1752.600000
Relative Permittivity (real part)	39.461247
Conductivity (S/m)	1.379367
Power Variation (%)	0.442300
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

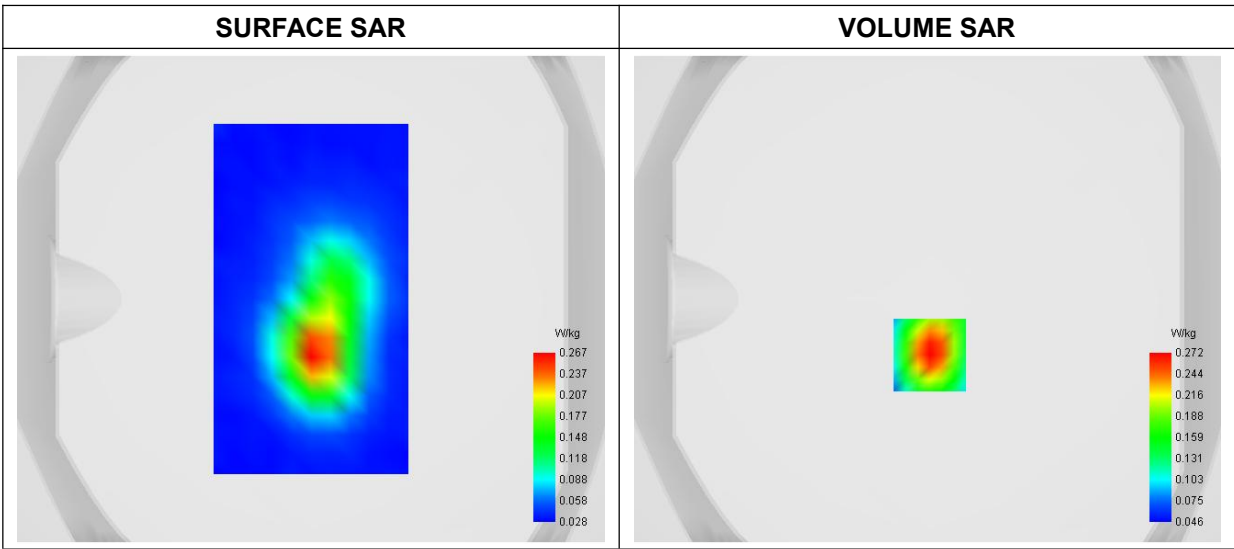


Maximum location: X=1.00, Y=-23.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.149615
SAR 1g (W/Kg)	0.251674

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.4093	0.2722	0.1831	0.1290	0.0973

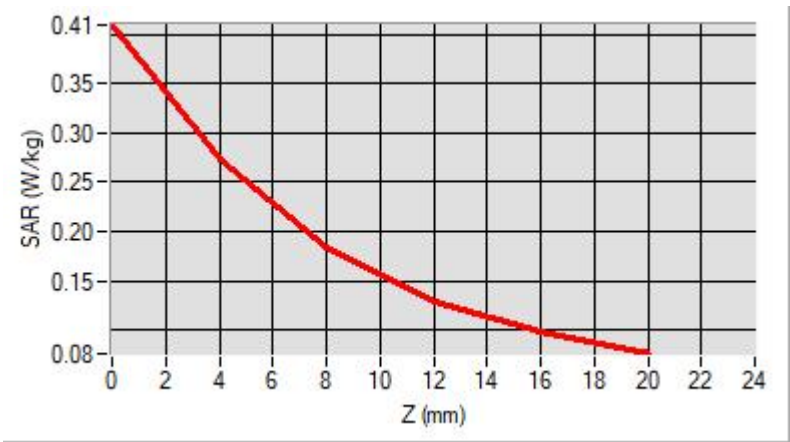

F. 3D Image

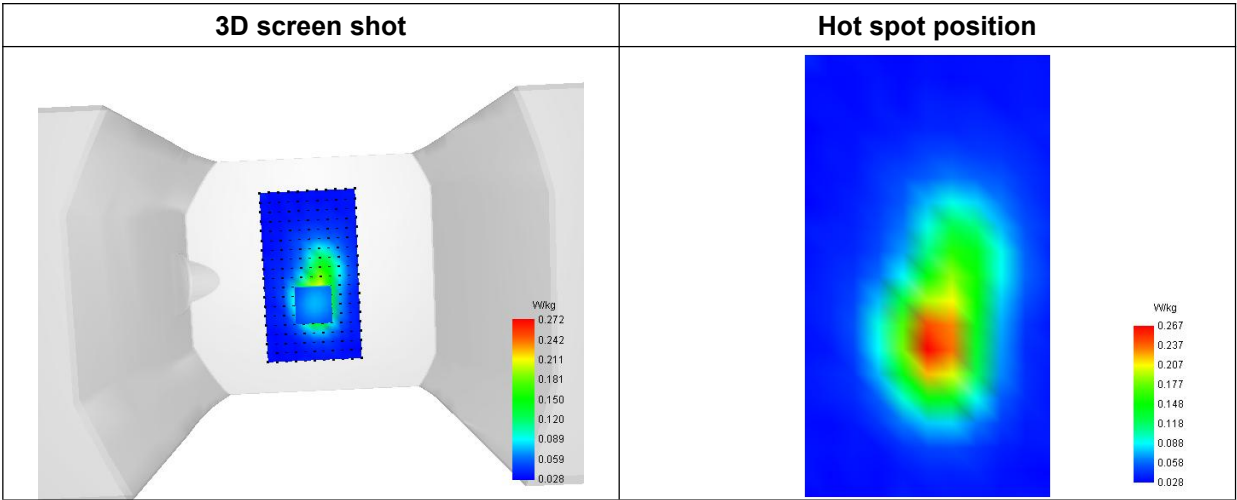

MEASUREMENT 51

Type: Measurement (Complete)
Date of measurement: 2025-03-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.23; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1745.00000
Relative Permittivity (real part)	39.461325
Conductivity (S/m)	1.382987
Power Variation (%)	-0.866400
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

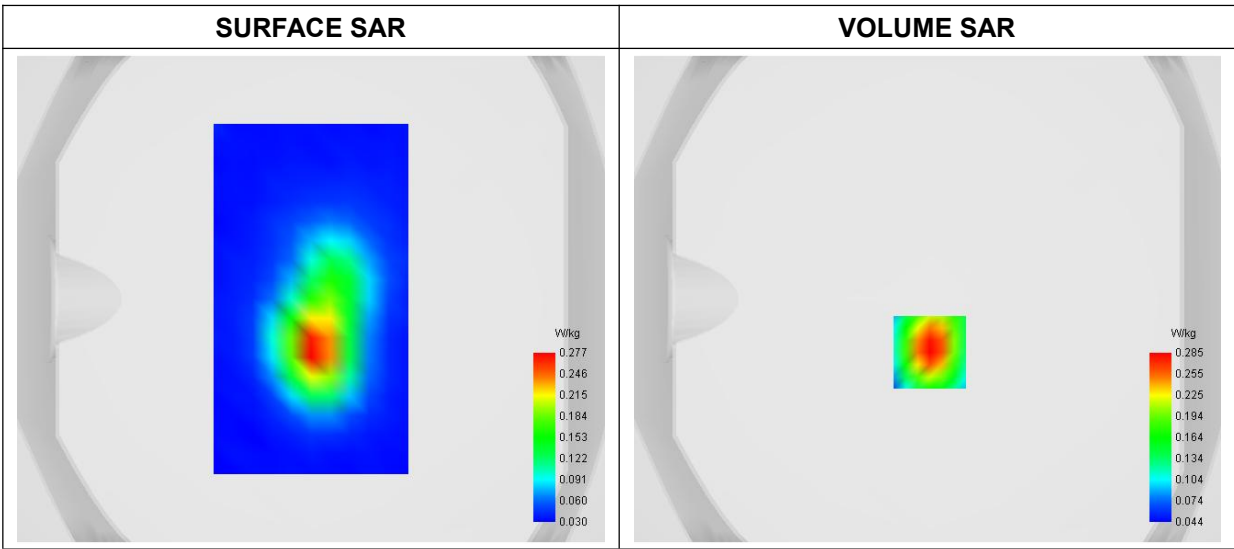


Maximum location: X=1.00, Y=-22.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.155076
SAR 1g (W/Kg)	0.263395

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.4287	0.2850	0.1913	0.1341	0.1003

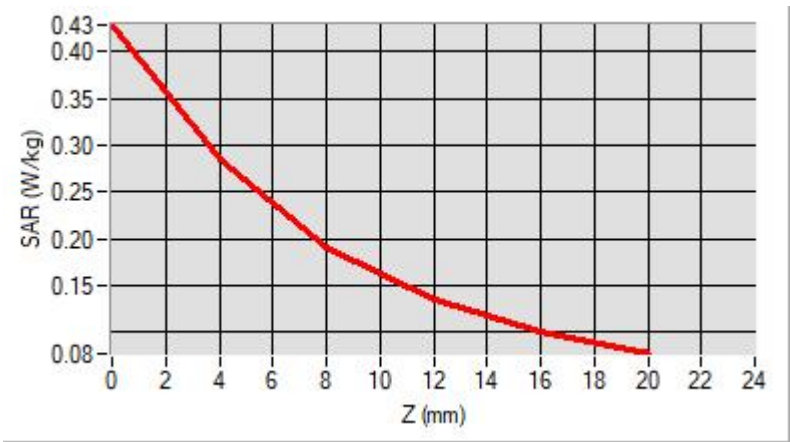

F. 3D Image

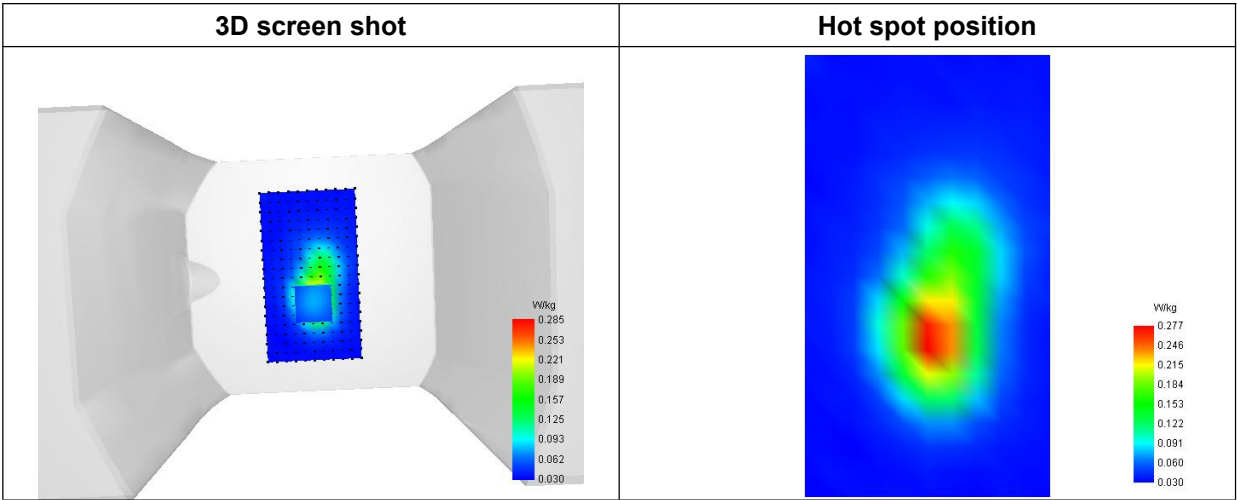

MEASUREMENT 53

Type: Measurement (Complete)
Date of measurement: 2025-03-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.36; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2560.000000
Relative Permittivity (real part)	39.731327
Conductivity (S/m)	1.942987
Power Variation (%)	-0.814700
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

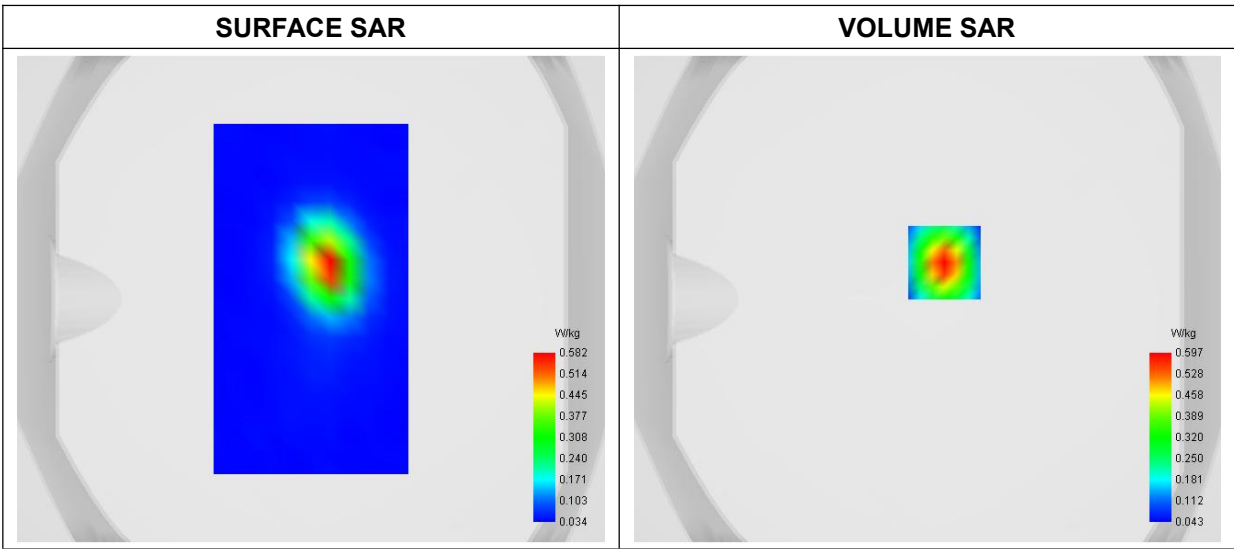


Maximum location: X=7.00, Y=15.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.251936
SAR 1g (W/Kg)	0.535281

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	1.0875	0.5969	0.3207	0.1810	0.1160

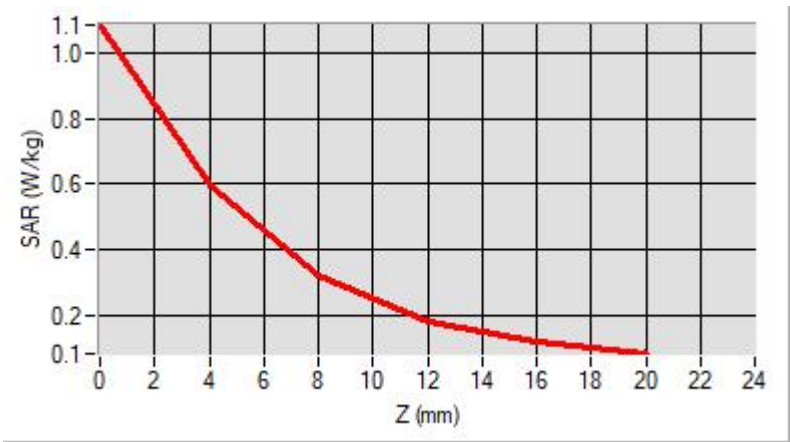

F. 3D Image

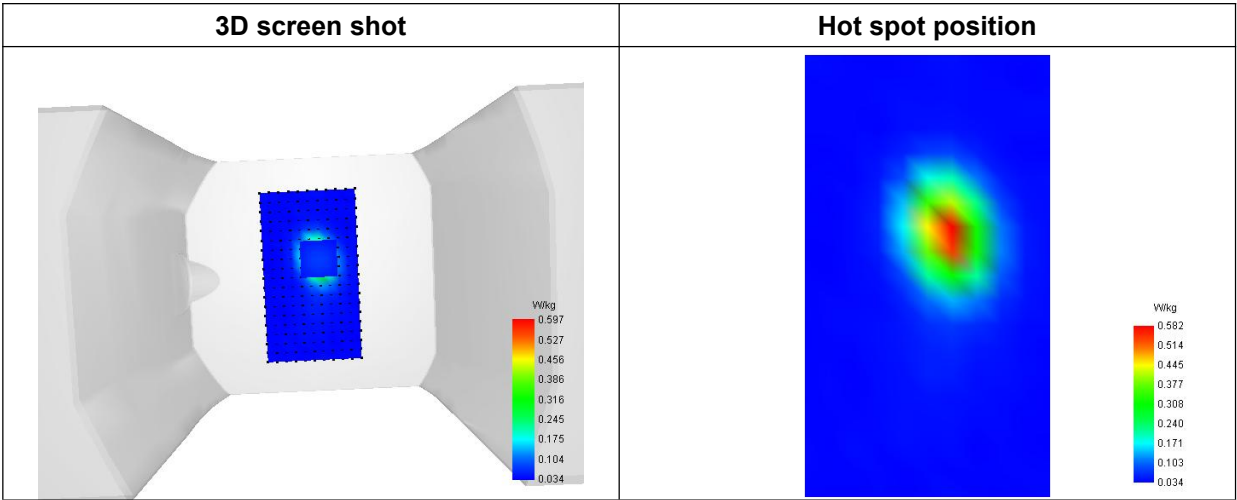

MEASUREMENT 57

Type: Measurement (Complete)
Date of measurement: 2025-03-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.36; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 38
Channels	16QAM, 20MHz, 1RB, High
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	2610.000000
Relative Permittivity (real part)	39.734266
Conductivity (S/m)	1.941828
Power Variation (%)	1.354300
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

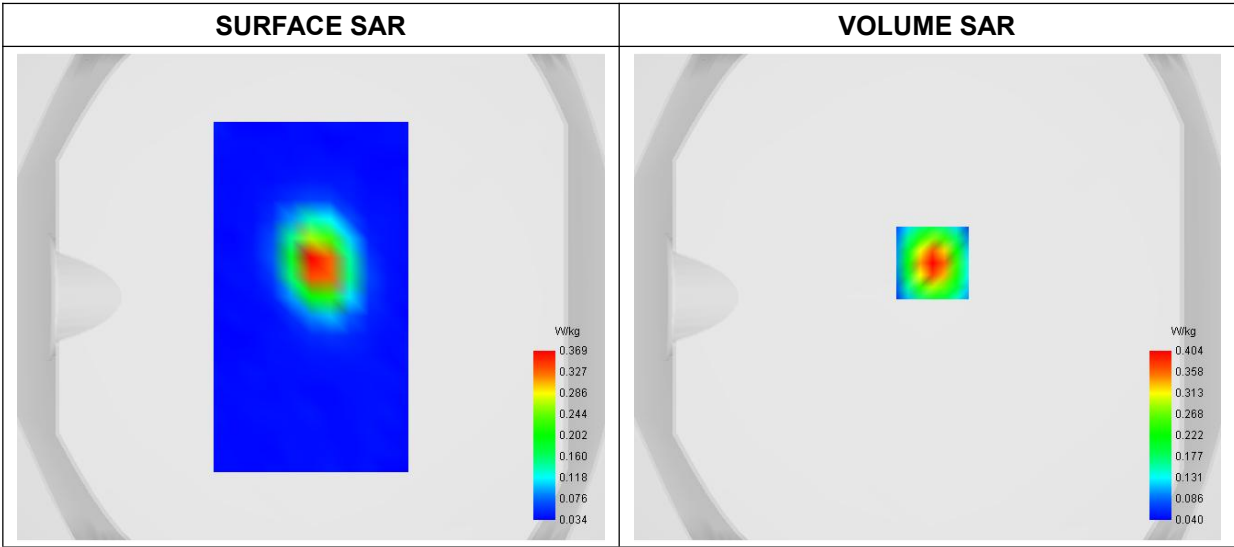


Maximum location: X=2.00, Y=14.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.178000
SAR 1g (W/Kg)	0.363716

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.7177	0.4039	0.2246	0.1322	0.0884

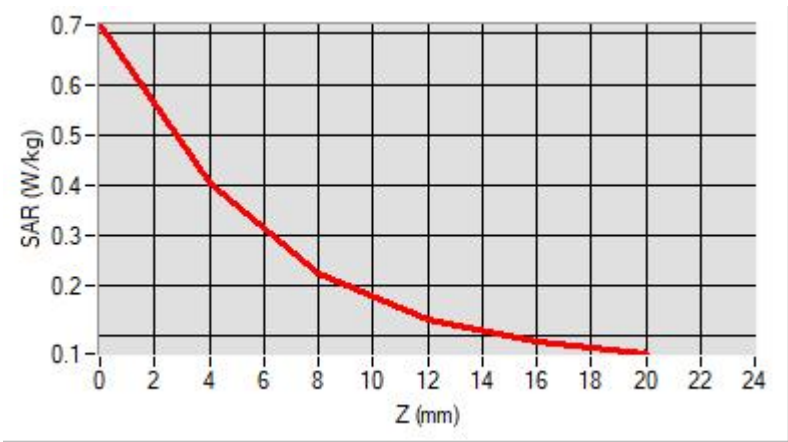

F. 3D Image

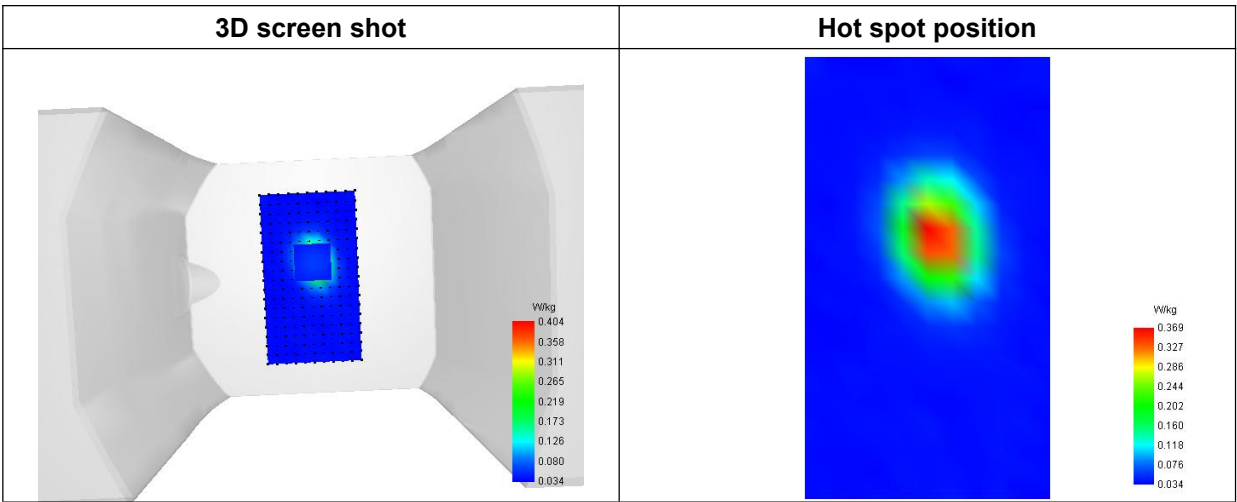

MEASUREMENT 57

Type: Measurement (Complete)
Date of measurement: 2025-03-29
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.23; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1745.000000
Relative Permittivity (real part)	39.461325
Conductivity (S/m)	1.382987
Power Variation (%)	1.354300
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

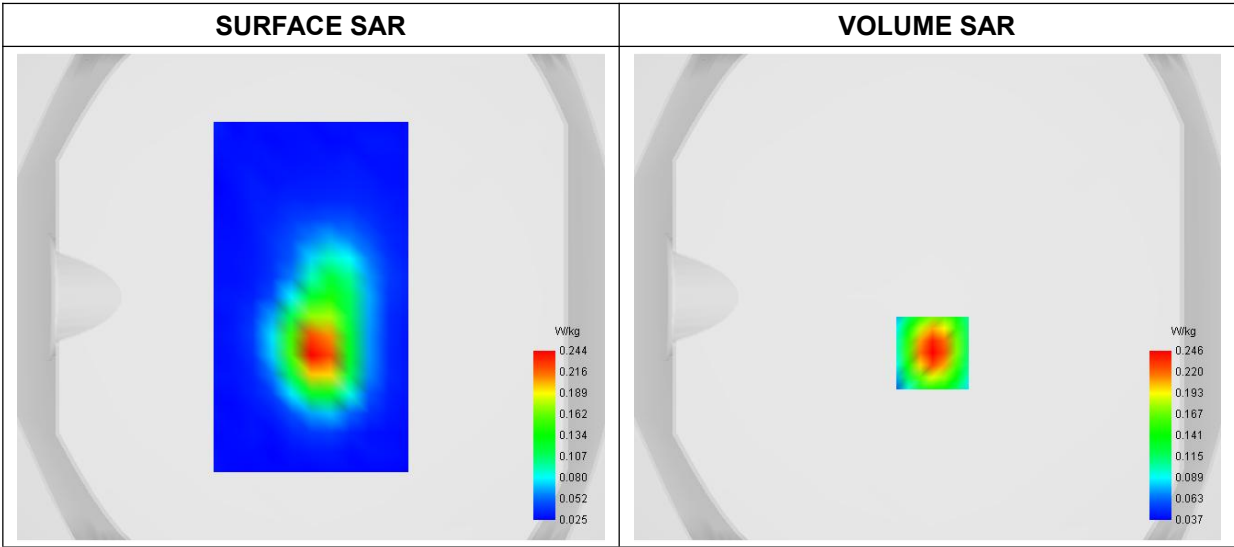


Maximum location: X=2.00, Y=-23.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.133191
SAR 1g (W/Kg)	0.225505

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3627	0.2456	0.1677	0.1188	0.0888

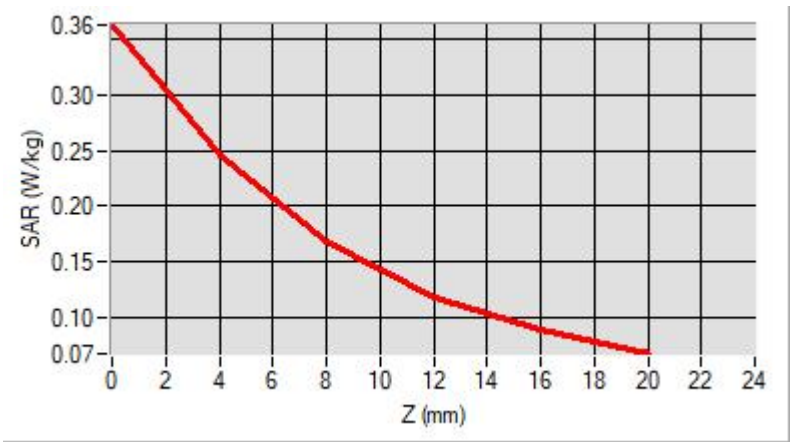

F. 3D Image

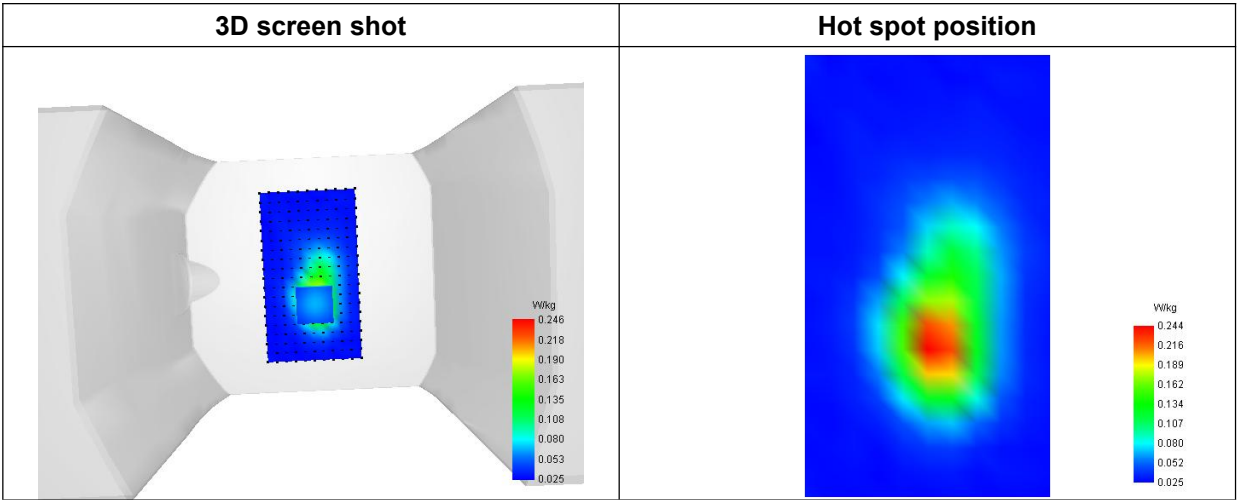

MEASUREMENT 62

Type: Measurement (Complete)
Date of measurement: 2025-04-05
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.56; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.2GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5180.000000
Relative Permittivity (real part)	35.242386
Conductivity (S/m)	4.634161
Power Variation (%)	0.345200
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

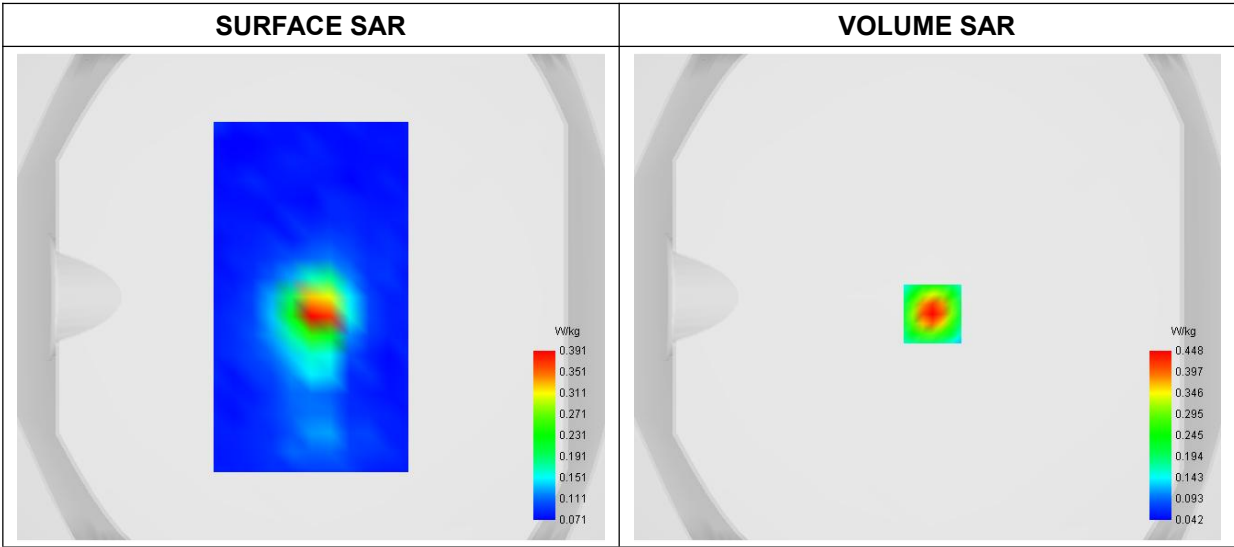


Maximum location: X=2.00, Y=-7.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.120152
SAR 1g (W/Kg)	0.256890

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.7900	0.4475	0.2369	0.1231	0.0698	0.0476	0.0420	0.0468	0.0595

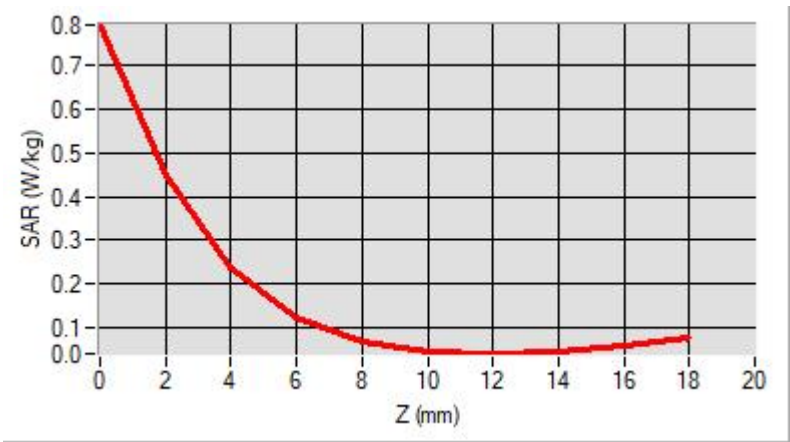

F. 3D Image

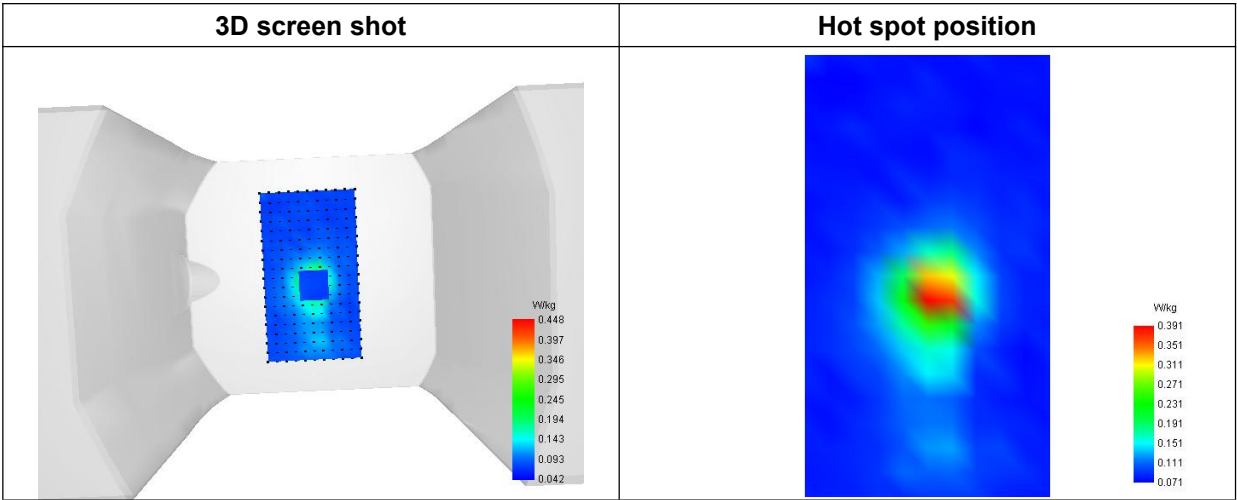

MEASUREMENT 63

Type: Measurement (Complete)
Date of measurement: 2025-04-06
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - 0725-EPGO-446; ConvF: 1.58; Calibrated: 2025-02-12


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Flat Plane
Device Position	Top
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5745.000000
Relative Permittivity (real part)	36.744273
Conductivity (S/m)	5.293836
Power Variation (%)	0.446900
Ambient Temperature	22.3
Liquid Temperature	22.3

C. SAR Surface and Volume

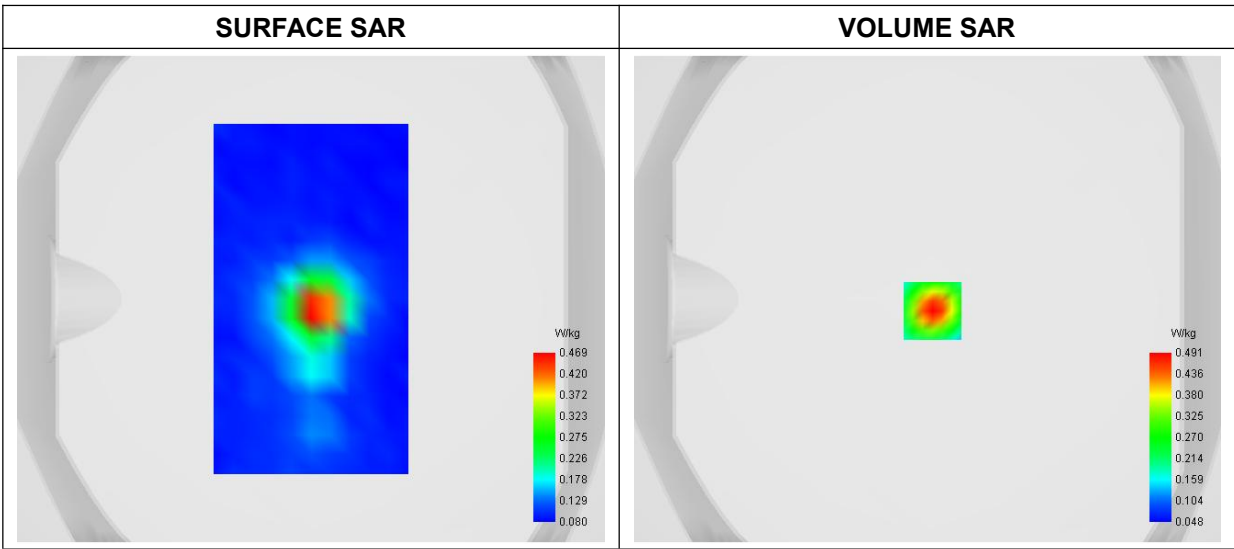


Maximum location: X=2.00, Y=-5.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.134951
SAR 1g (W/Kg)	0.284746

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.8529	0.4908	0.2664	0.1430	0.0836	0.0582	0.0511	0.0554	0.0682

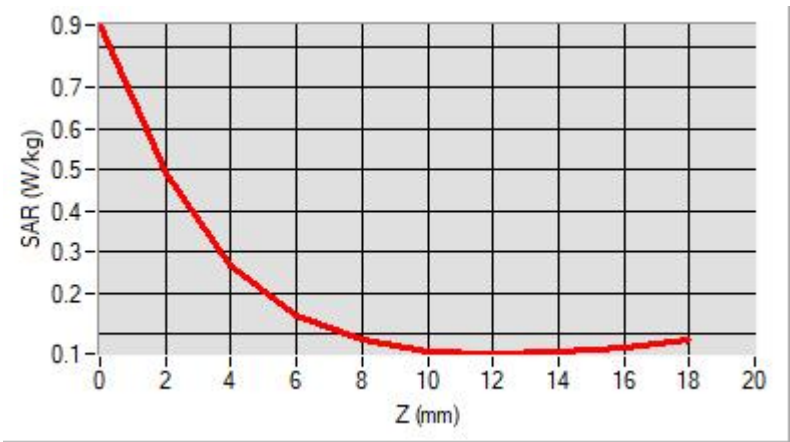

F. 3D Image

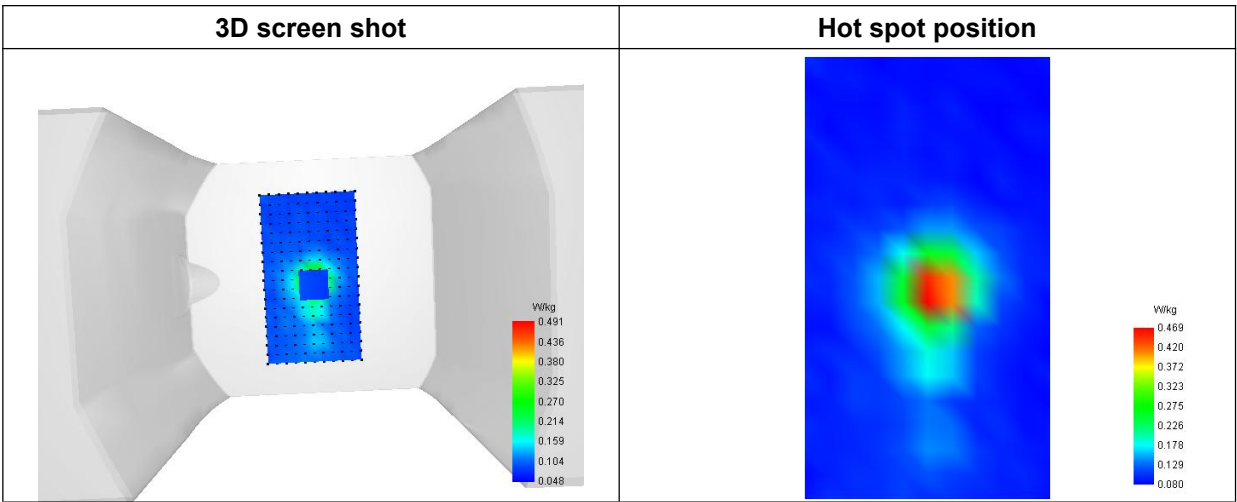

Annex C. EUT Photos


EUT View 1



EUT View 2




Antenna View

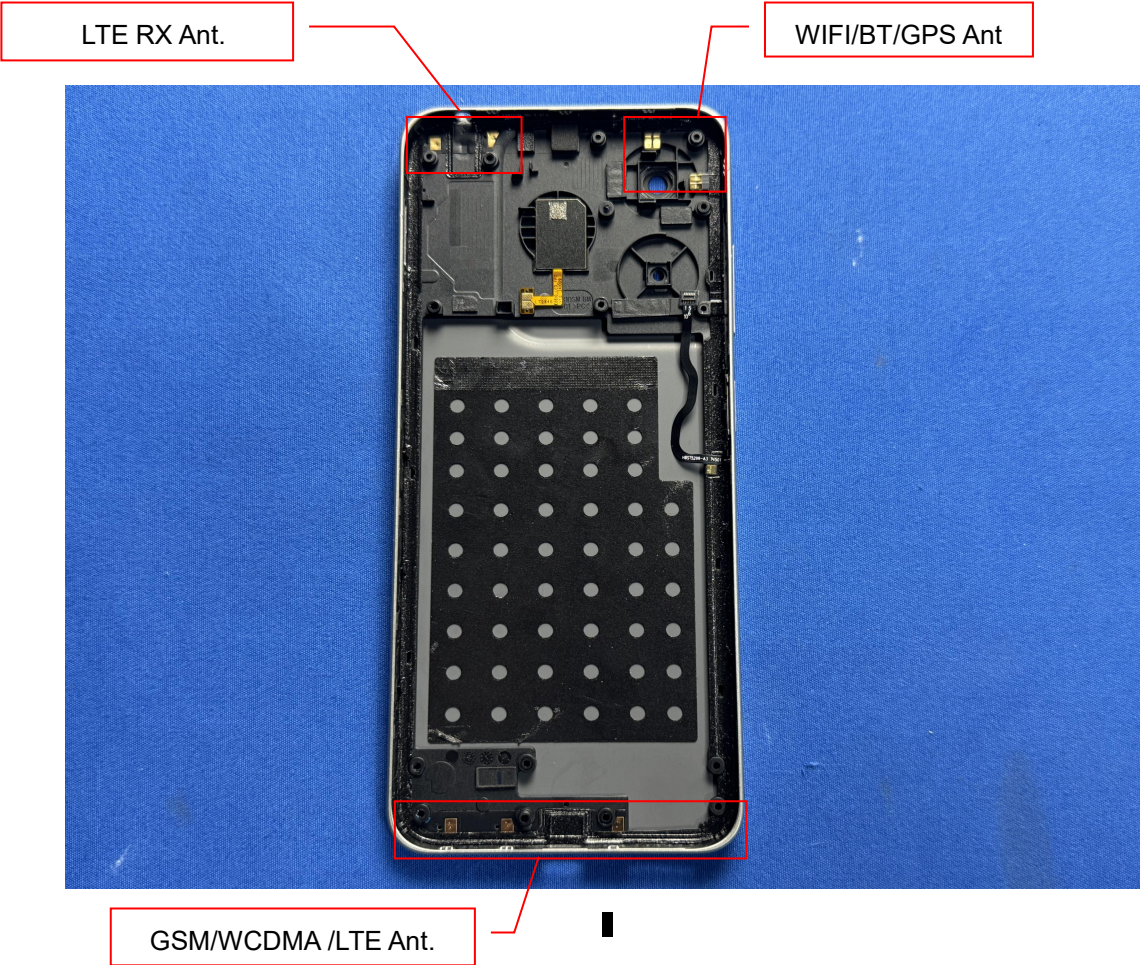

Annex D. Test Setup Photos

Head Exposure Conditions

Right Cheek

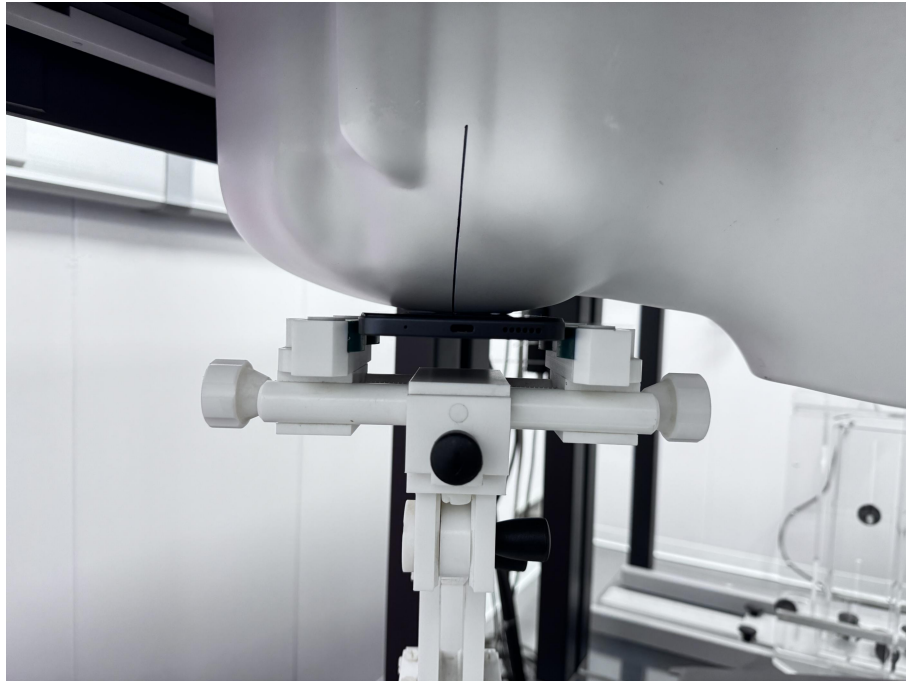

Right Tilt

