

Antenna Specification

Antenna overview

1. Antenna Type and Model:
Type: PCB Antenna
Model: PIFA Antenna
2. Gain: about 3.22dBi(Peak)
3. Antenna Directivity Coefficient: about 1.8 @2450MHz
4. Antenna Polarization characteristic: elliptical polarization
5. Inside or outside: Inside
6. Name of Manufacturer: SHENZHEN FUDI ELECTRONICS CO., LTD
7. Manufacturer's address: Room 201, Tower A, No. 29 Baoshi Rd., Section 72, Baoan Centre, Shenzhen, China

PIFA Antenna

The antenna adopts the ultra-small PIFA antenna, and because of the limited area of PCB, the gain of antenna will be smaller than that of the other antennas. The communication distance can reach about 15 ~ 20 meters. The size of the PCB antenna is 10.7* 3.2mm, and the thickness of PCB is 1.6mm. The specific size of the antenna is shown in figure 1, the physical object is shown in figure 2.

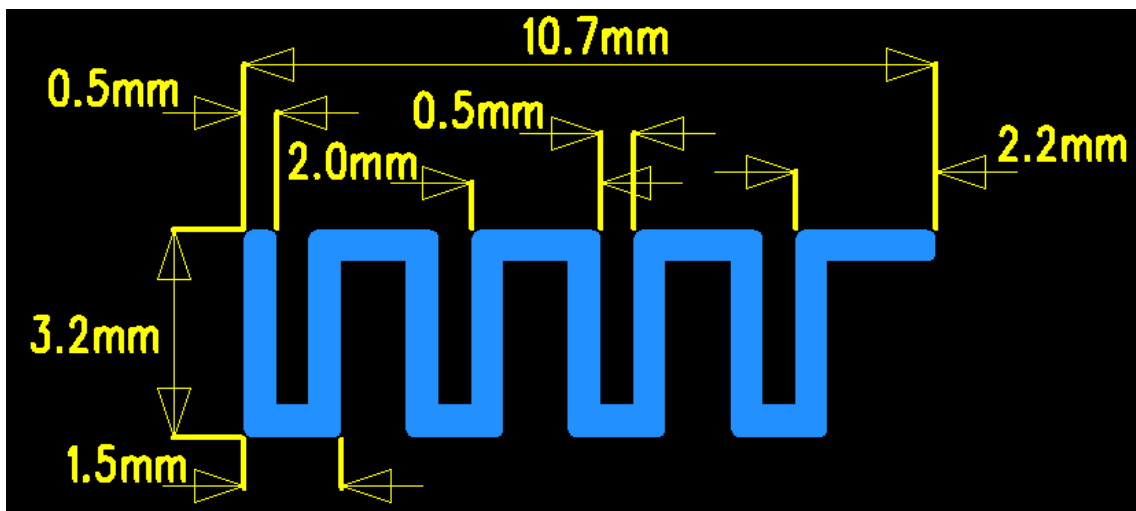


Figure 1 : Antenna size

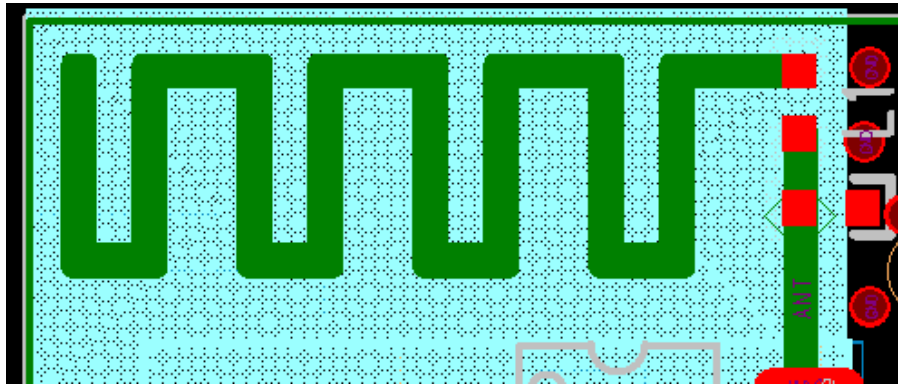


Figure 2 : Antenna

The antenna's S11 test data is shown in figure 3, covering the entire 2.4 G frequency band.

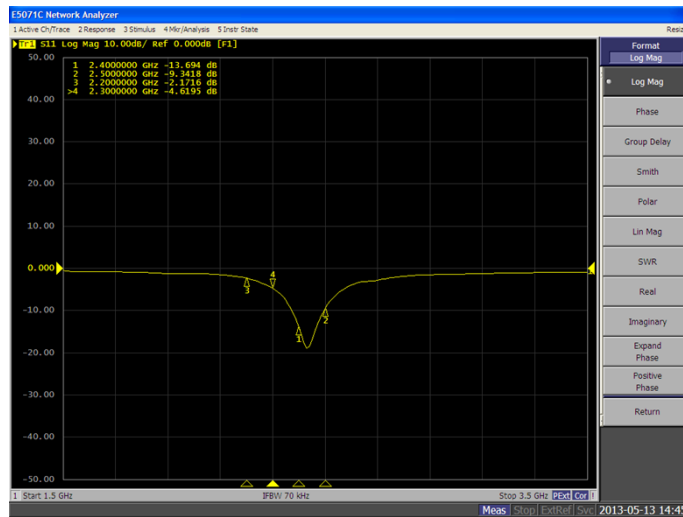


图 3 Antenna S11

Channel List-2.4G(MHz)


2402	2404	2406	2408	2410	2412	2414	2416	2418	2420
2422	2424	2426	2428	2430	2432	2434	2436	2438	2440
2442	2444	2446	2448	2450	2452	2454	2456	2458	2460
2462	2464	2466	2468	2470	2472	2474	2476	2478	2480

The gain simulation data of the antenna is shown in figure .


Frequency	Gain (dBi)	Efficiency (%)
2400MHz	2.89	52
2410MHz	2.83	52
2420MHz	2.90	52
2430MHz	3.17	52
2440MHz	3.12	51
2450MHz	3.22	51

2460MHz	3.06	51
2470MHz	2.94	51
2480MHz	3.11	51
2490MHz	3.16	51
2500MHz	2.85	50


1D Radiation Pattern

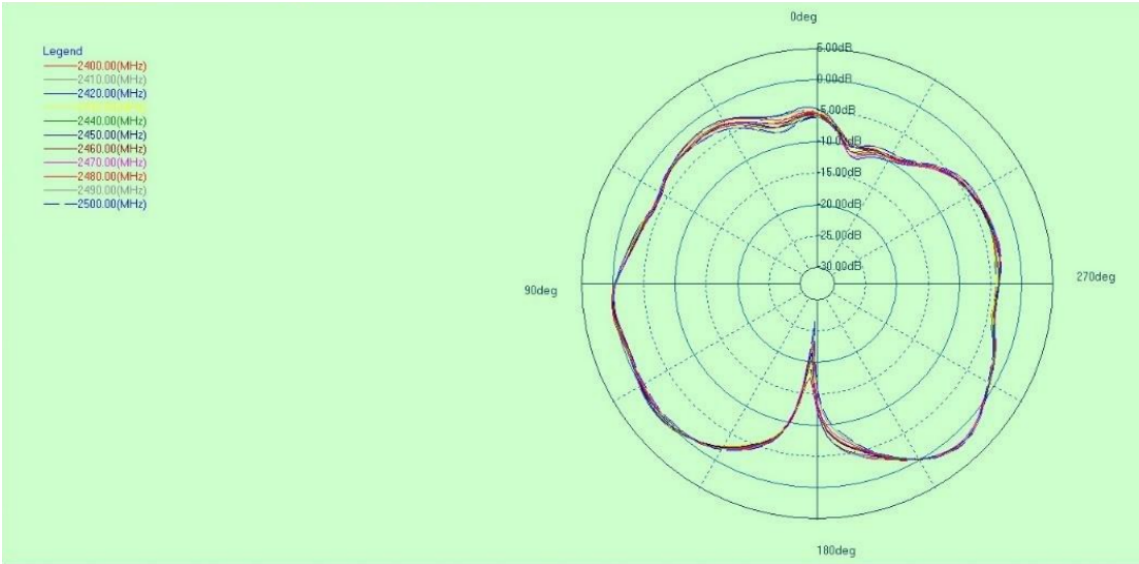

PHI=0

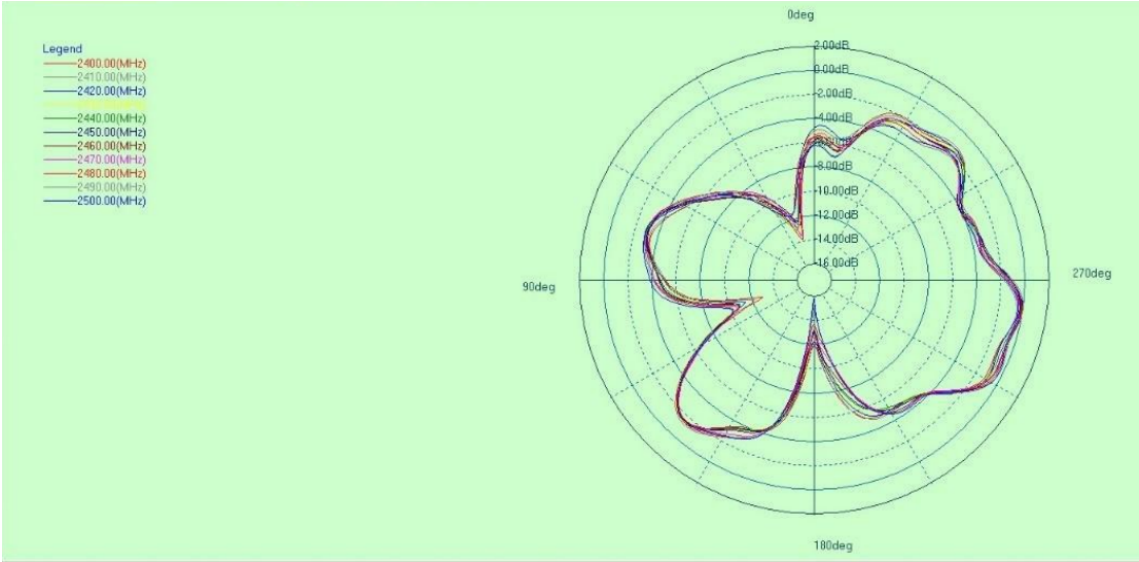

PHI=90

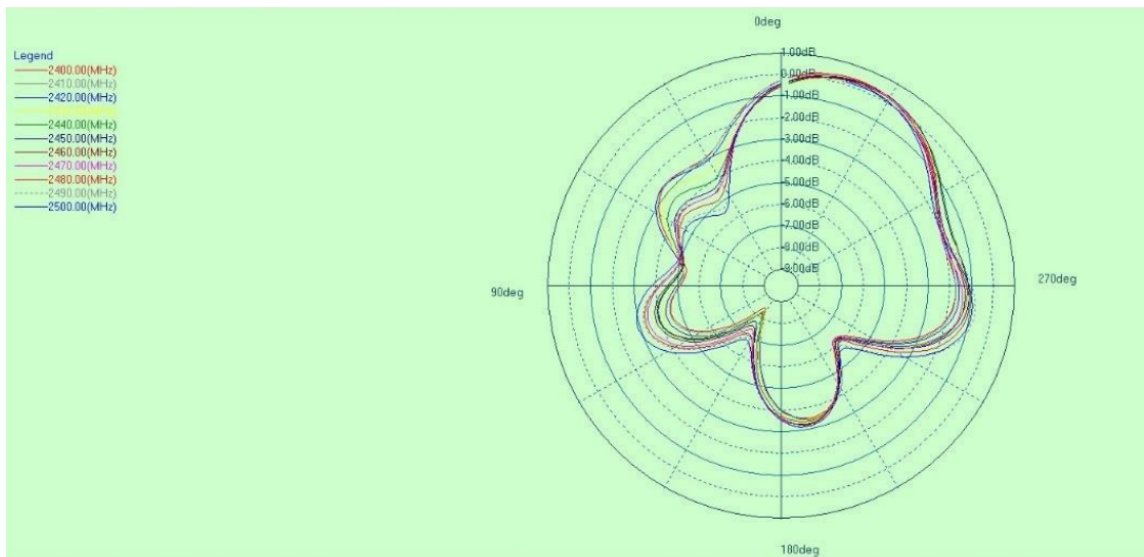


THETA=90


ANNEX B RADIATION PATTERN

B.1 3D Pattern

B1.1 3D Pattern for 2400MHz

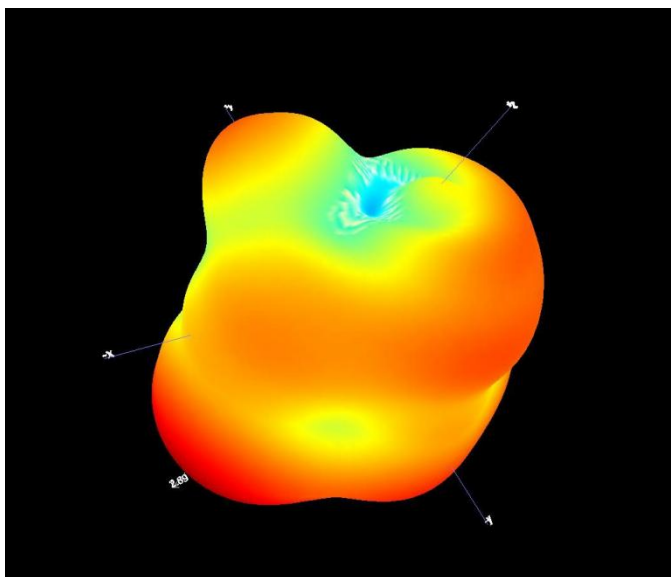

B1.2 3D Pattern for 2450MHz

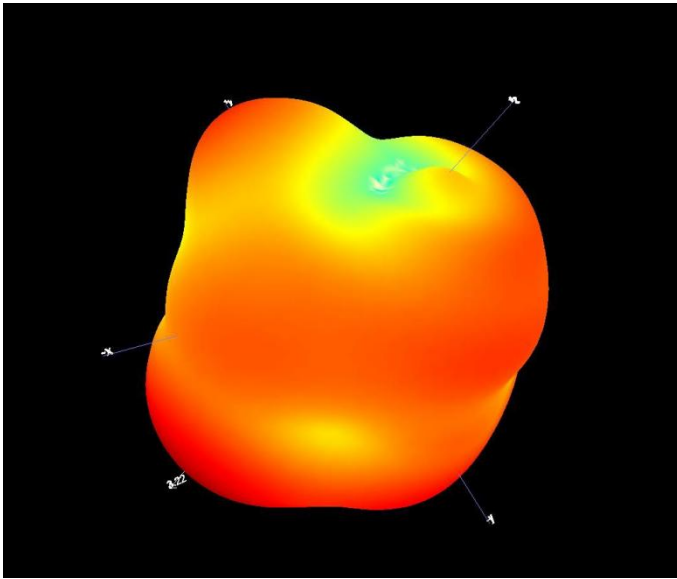

B1.3 3D Pattern for 2500MHz

