


Appendix B: Test Results of Bluetooth Low Energy

APPENDIX B: TEST RESULTS OF BLUETOOTH LOW ENERGY	1
APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX B.2: TEST RESULTS OF 6dB BANDWIDTH	4
APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH	6
APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	8
<i>Band Edge</i>	8
<i>Conducted Spurious Emission</i>	10
APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	14
30 MHz - 1GHz	14
1GHz - 18GHz	16
APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	28

Appendix B.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-8.13	≤8.00	PASS
		2440	-9.70	≤8.00	PASS
		2480	-8.57	≤8.00	PASS

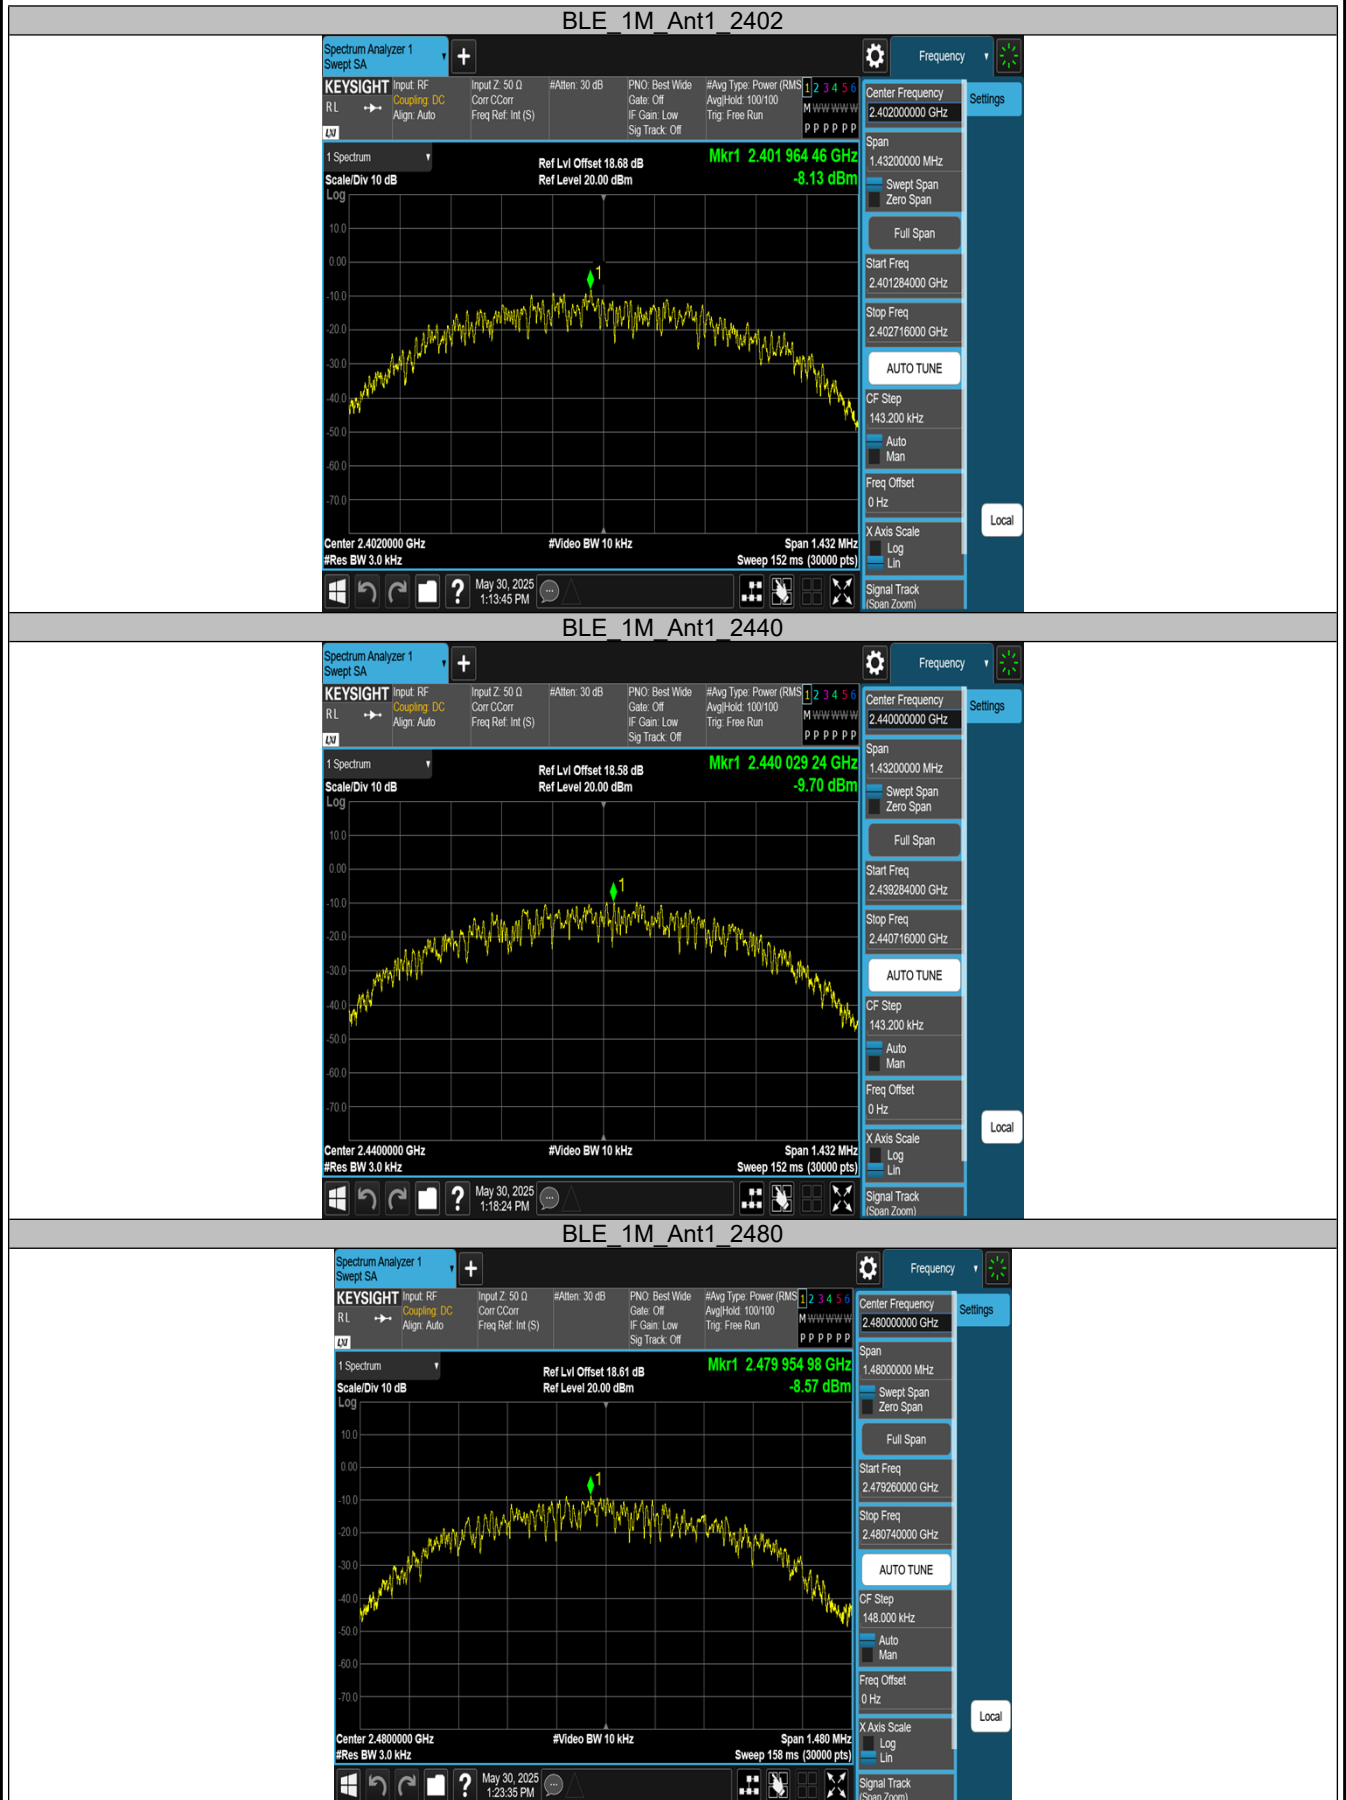

Appendix B.2: Test Results of 6dB Bandwidth

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.716	2401.628	2402.344	0.5	PASS
		2440	0.716	2439.624	2440.340	0.5	PASS
		2480	0.740	2479.620	2480.360	0.5	PASS

BLE_1M_Ant1_2402



BLE_1M_Ant1_2440




BLE_1M_Ant1_2480




Appendix B.3: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0502	2401.4759	2402.5261	---	---
		2440	1.0630	2439.4628	2440.5258	---	---
		2480	1.0534	2479.4677	2480.5211	---	---

BLE_1M_Ant1_2402

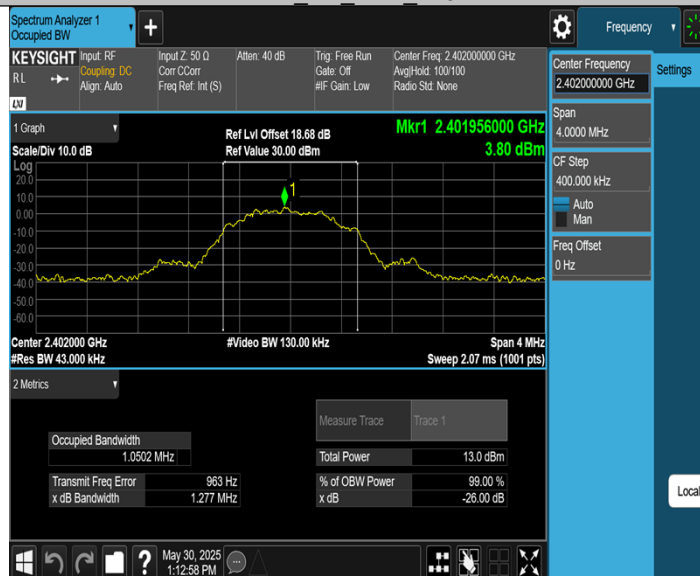

BLE_1M_Ant1_2440

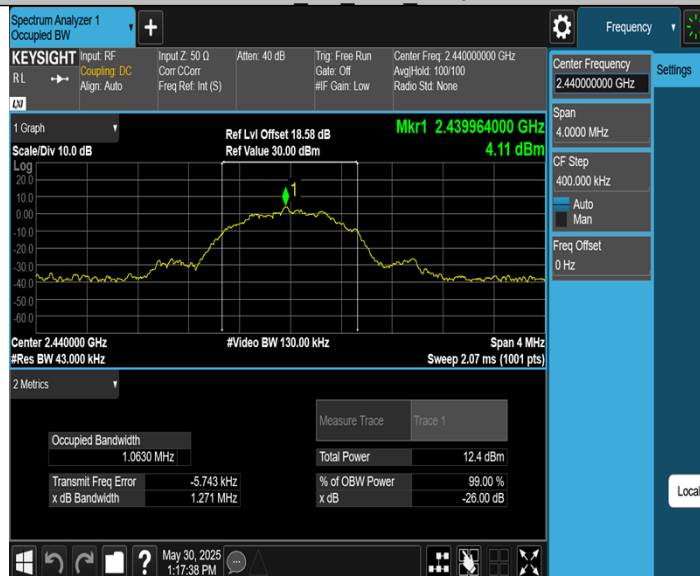

BLE_1M_Ant1_2480



Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Band Edge

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	5.60	-44.63	≤-14.40	PASS
		High	2480	5.91	-46.44	≤-14.09	PASS




Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	5.59	5.59	---	PASS
			30~1000	5.59	-41.71	≤-14.41	PASS
			1000~26500	5.59	-31.75	≤-14.41	PASS
		2440	Reference	5.13	5.13	---	PASS
			30~1000	5.13	-40.47	≤-14.87	PASS
			1000~26500	5.13	-31.82	≤-14.87	PASS
		2480	Reference	5.78	5.78	---	PASS
			30~1000	5.78	-41.98	≤-14.22	PASS
			1000~26500	5.78	-32.06	≤-14.22	PASS


BLE 1M Ant1 2402 0~Reference



BLE 1M Ant1 2402 30~1000

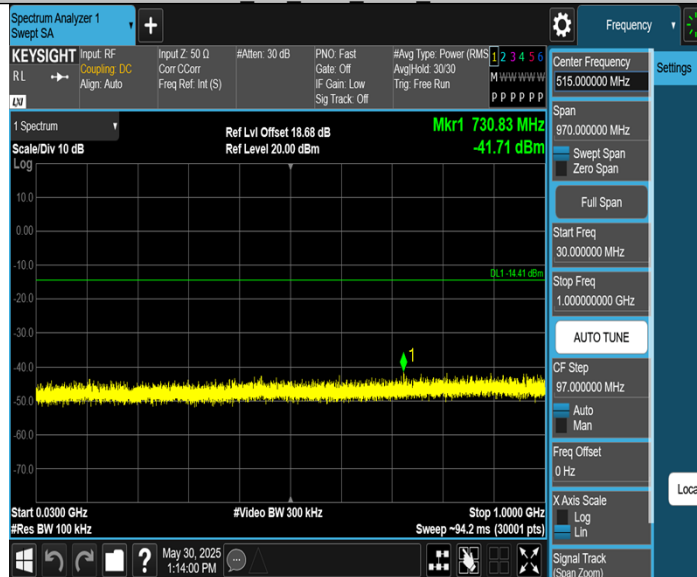


BLE 1M Ant1 2402 1000~26500

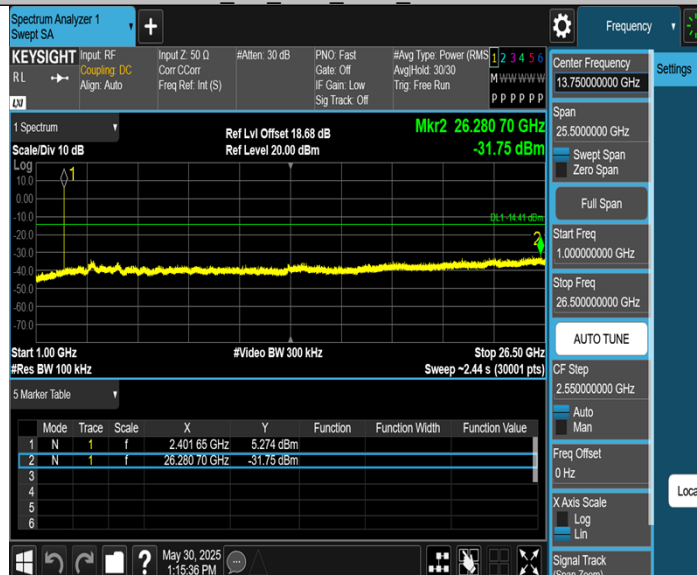

BLE_1M_Ant1_2440_0~Reference



BLE_1M_Ant1_2440_30~1000

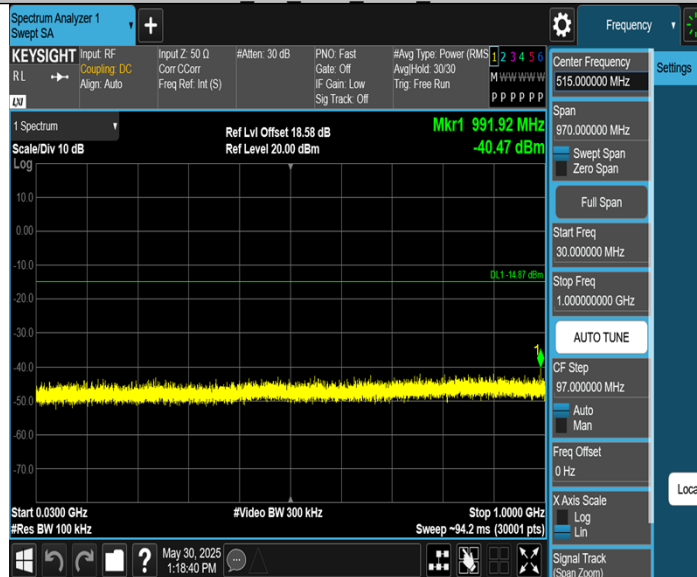

BLE_1M_Ant1_2440_1000~26500





Appendix B.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.
- 3) Full test performed on the right earbud and worst-case re-checked for the left earbud.

30 MHz - 1GHz

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

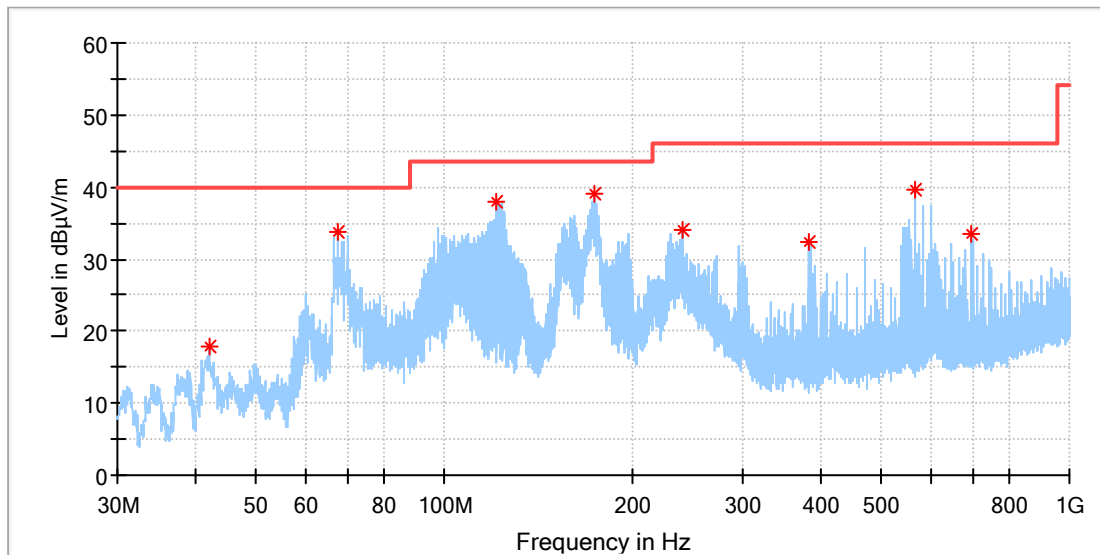

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.013077	17.85	40.00	22.15	100.0	H	136.0	-19.7
67.680769	33.67	40.00	6.33	100.0	H	59.0	-21.2
121.329231	37.99	43.50	5.51	100.0	H	258.0	-21.0
173.933077	39.01	43.50	4.49	100.0	H	358.0	-21.1
240.527308	34.11	46.00	11.89	100.0	H	358.0	-17.7
383.676923	32.29	46.00	13.71	100.0	H	14.0	-14.2
568.014231	39.51	46.00	6.49	100.0	H	136.0	-10.4
696.016923	33.39	46.00	12.61	100.0	H	258.0	-8.0

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: General-Purpose Robot
Model: A2
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168541455/A003981953-001
Test Voltage:: Battery
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

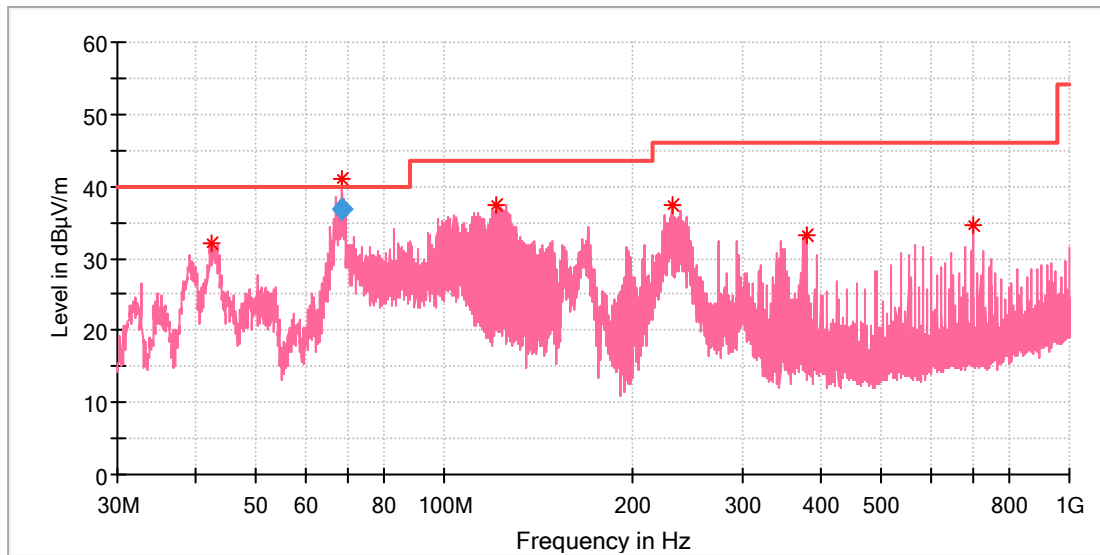

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.423462	32.13	40.00	7.87	100.0	V	38.0	-19.6
68.490192	41.11	40.00	-1.11	100.0	V	6.0	-21.5
121.217308	37.53	43.50	5.97	100.0	V	357.0	-21.0
231.013846	37.39	46.00	8.61	100.0	V	17.0	-18.1
378.976154	33.27	46.00	12.73	100.0	V	27.0	-14.3
700.046154	34.73	46.00	11.27	100.0	V	341.0	-7.9

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
68.490192	36.87	40.00	3.13	100.0	V	6.0	-21.4

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

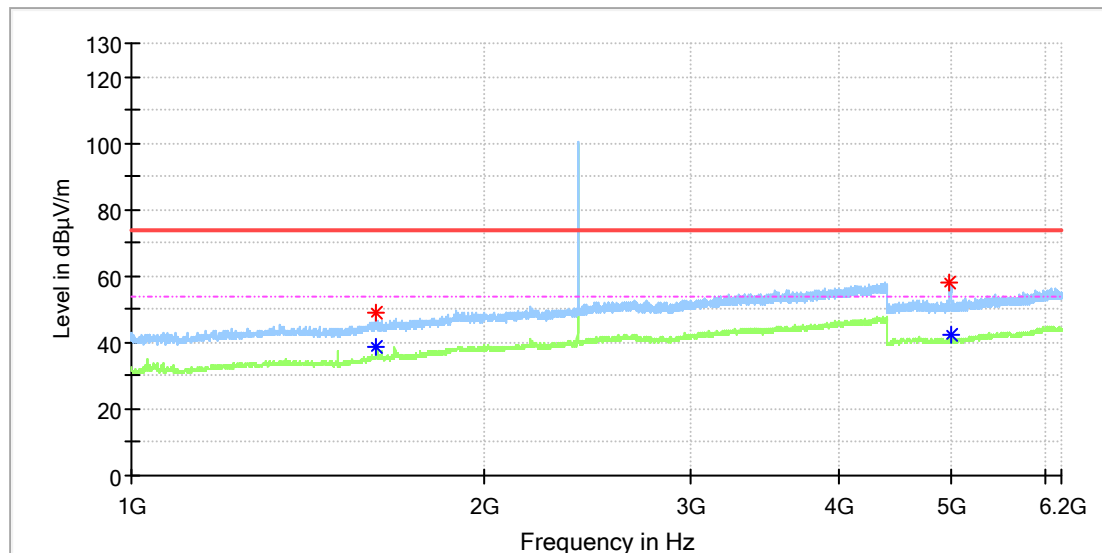

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1615.000000	49.00	---	74.00	25.00	150.0	H	62.0	4.0
1617.500000	---	38.97	54.00	15.03	150.0	H	62.0	4.0
4977.500000	58.23	---	74.00	15.77	150.0	H	232.0	13.3
4993.500000	---	42.31	54.00	11.69	150.0	H	225.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

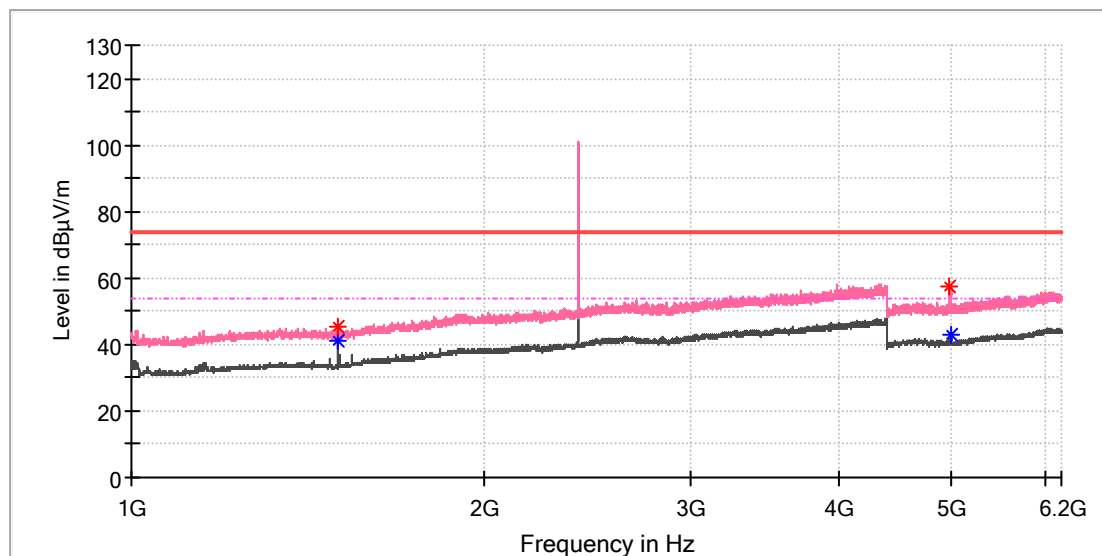

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1500.000000	45.59	---	74.00	28.41	150.0	V	1.0	2.5
1500.000000	---	40.91	54.00	13.09	150.0	V	1.0	2.5
4977.500000	57.44	---	74.00	16.56	150.0	V	356.0	13.3
4996.000000	---	42.95	54.00	11.05	150.0	V	356.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----	----		----	----

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

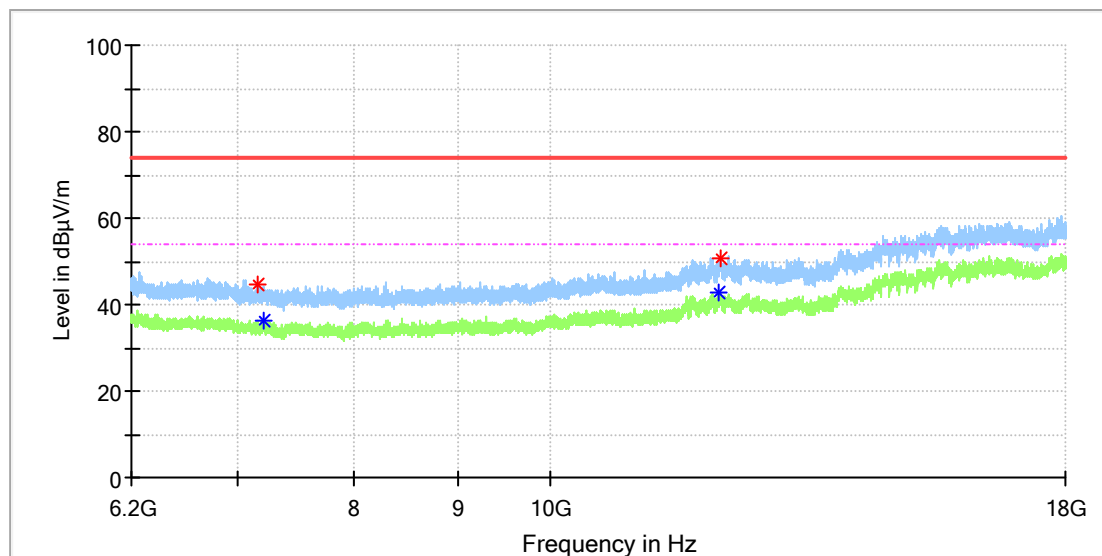

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7156.291667	44.50	---	74.00	29.50	150.0	H	183.0	8.7
7202.508333	---	36.39	54.00	17.61	150.0	H	0.0	8.8
12125.566667	---	42.89	54.00	11.11	150.0	H	96.0	16.1
12141.300000	50.91	---	74.00	23.09	150.0	H	153.0	16.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

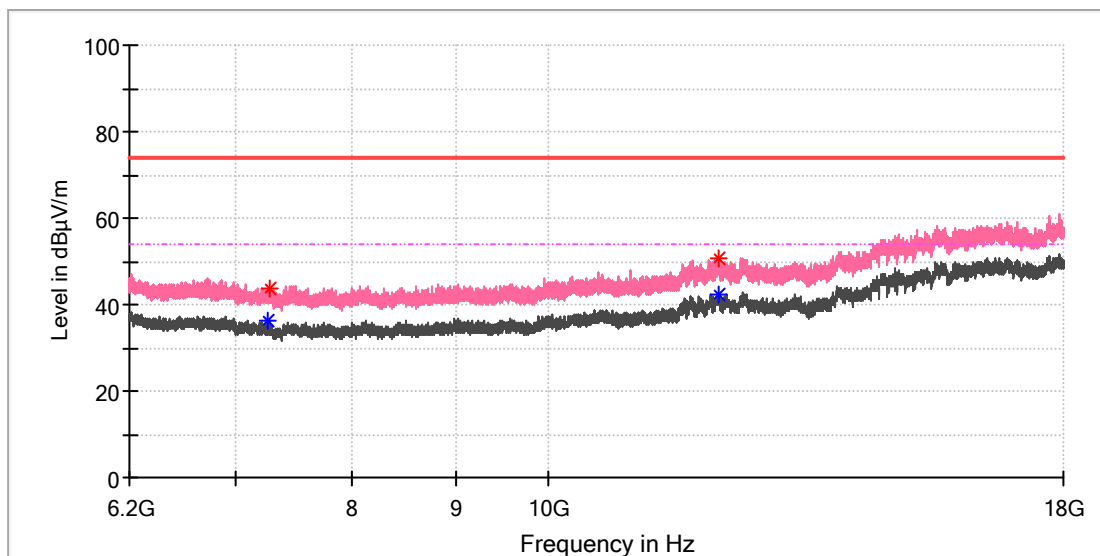

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7255.608333	---	36.32	54.00	17.68	150.0	V	108.0	8.5
7283.633333	43.86	---	74.00	30.14	150.0	V	108.0	8.4
12147.691667	---	42.55	54.00	11.45	150.0	V	0.0	16.7
12149.166667	50.61	---	74.00	23.39	150.0	V	108.0	16.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

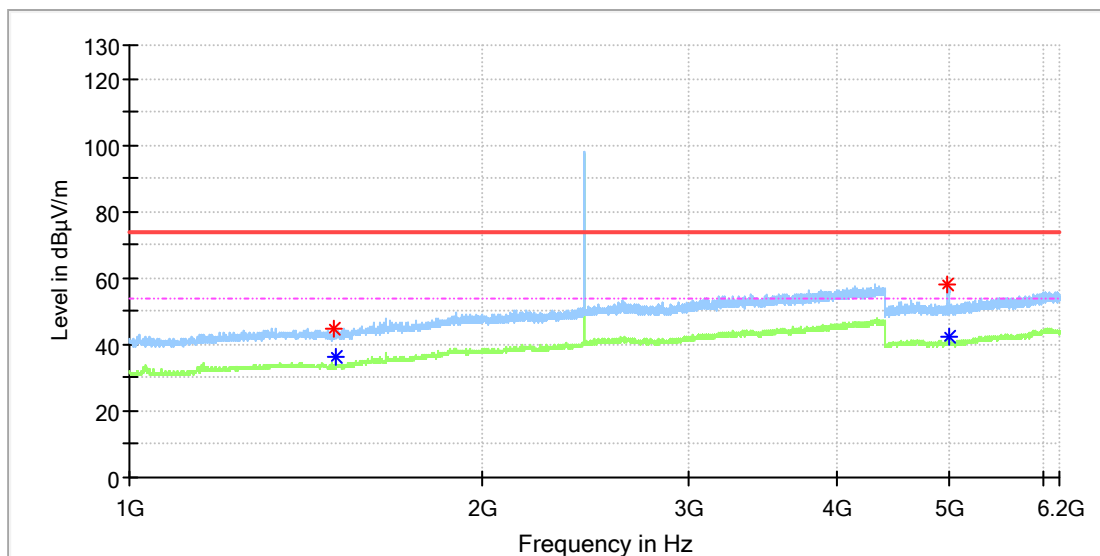

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
1496.000000	44.90	---	74.00	29.10	150.0	H	0.0	2.5
1500.000000	---	36.55	54.00	17.45	150.0	H	259.0	2.5
4978.000000	57.81	---	74.00	16.19	150.0	H	196.0	13.3
4989.000000	---	42.62	54.00	11.38	150.0	H	196.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

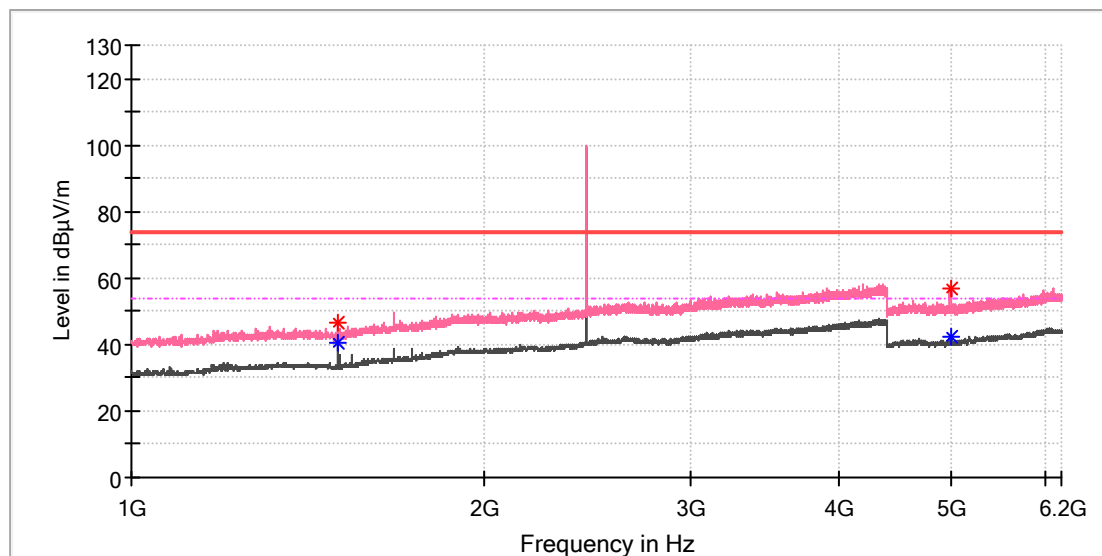

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
1500.000000	46.65	---	74.00	27.35	150.0	V	24.0	2.5
1500.000000	---	40.60	54.00	13.40	150.0	V	24.0	2.5
4990.000000	---	42.38	54.00	11.62	150.0	V	0.0	13.3
4995.000000	56.56	---	74.00	17.44	150.0	V	0.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

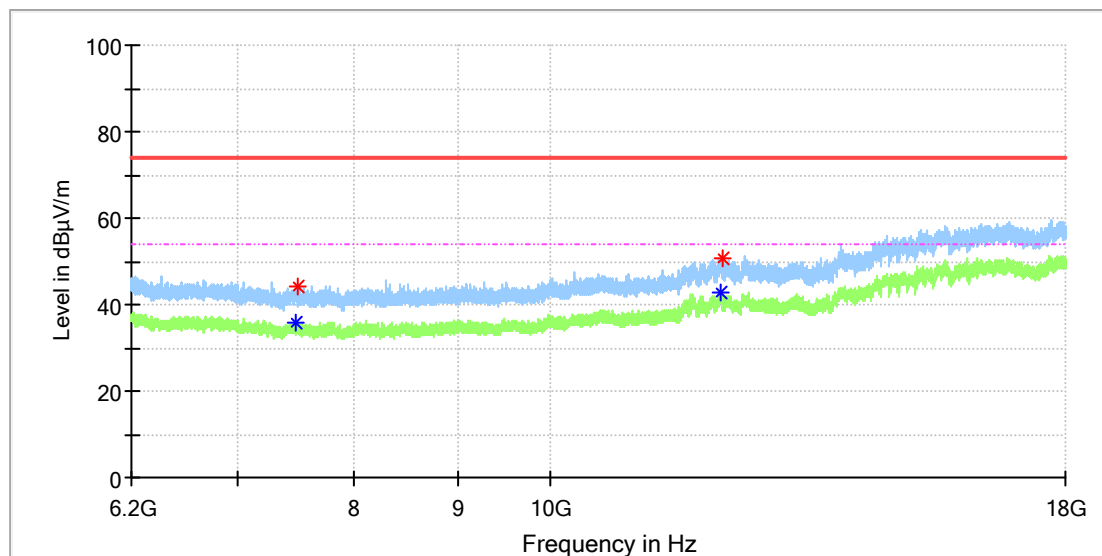

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7474.400000	---	35.88	54.00	18.12	150.0	H	148.0	8.6
7501.933333	44.21	---	74.00	29.79	150.0	H	70.0	8.7
12136.383333	---	42.79	54.00	11.21	150.0	H	359.0	16.4
12166.866667	50.73	---	74.00	23.27	150.0	H	306.0	15.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

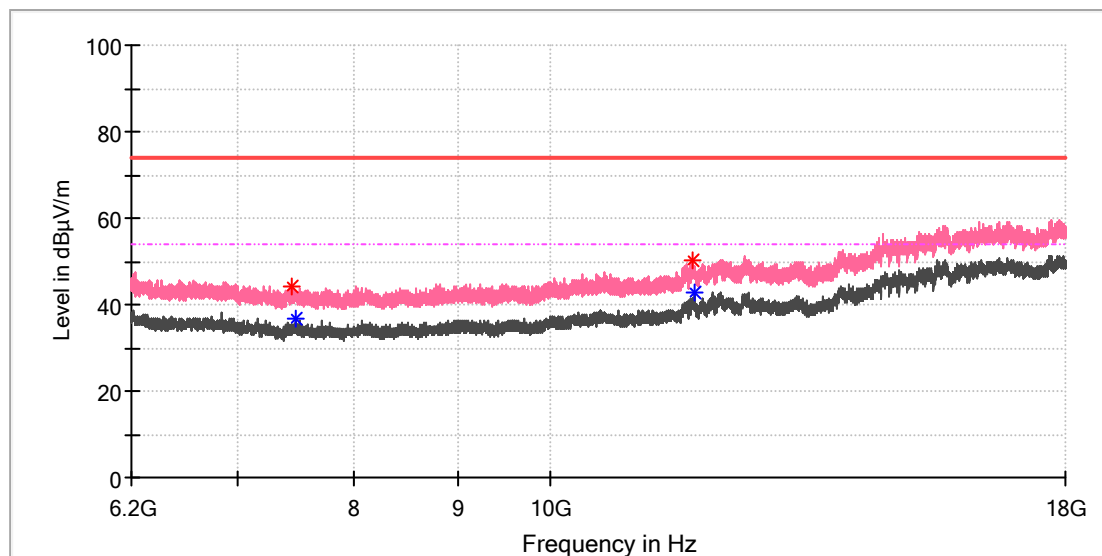

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7448.341667	44.34	---	74.00	29.66	150.0	V	160.0	8.5
7473.416667	---	36.75	54.00	17.25	150.0	V	90.0	8.6
11769.600000	50.09	---	74.00	23.91	150.0	V	310.0	15.3
11797.625000	---	42.64	54.00	11.36	150.0	V	253.0	14.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

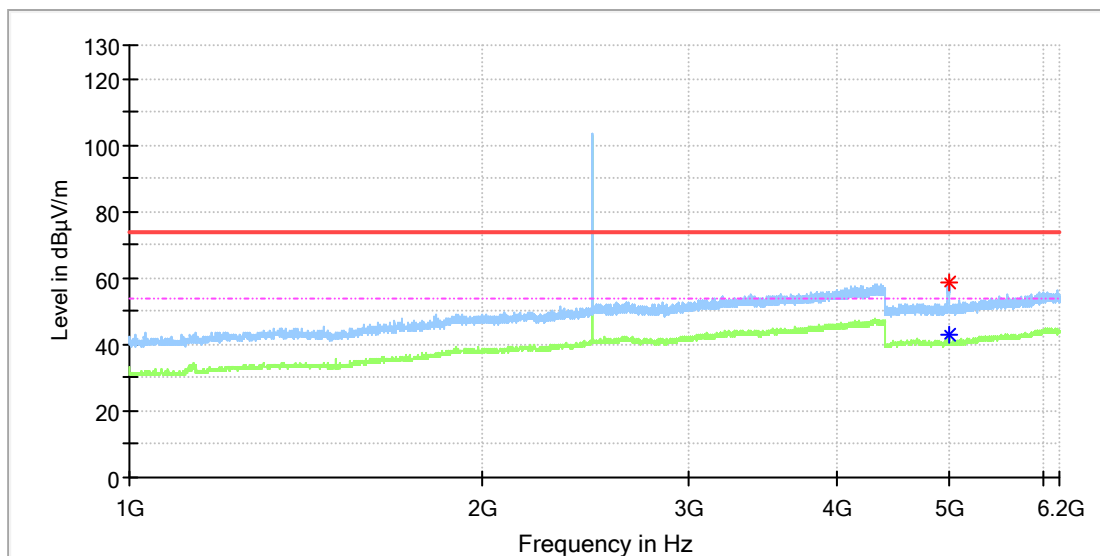

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4995.000000	58.39	---	74.00	15.61	150.0	H	222.0	13.3
4997.500000	---	42.75	54.00	11.25	150.0	H	222.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

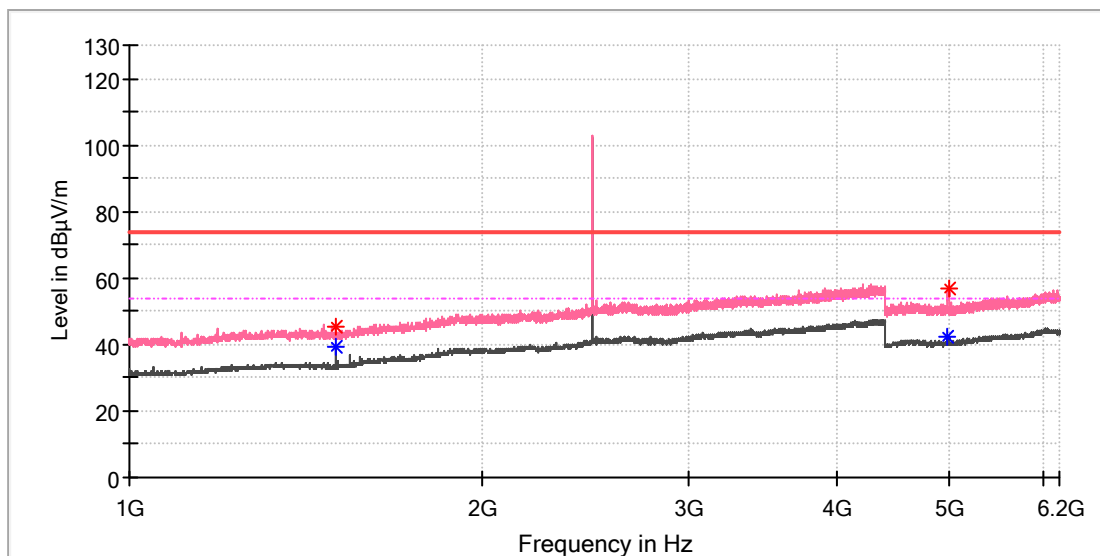

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
1499.500000	45.40	---	74.00	28.60	150.0	V	0.0	2.5
1500.000000	---	39.26	54.00	14.74	150.0	V	7.0	2.5
4978.000000	---	42.23	54.00	11.77	150.0	V	0.0	13.3
4987.500000	56.64	---	74.00	17.36	150.0	V	1.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

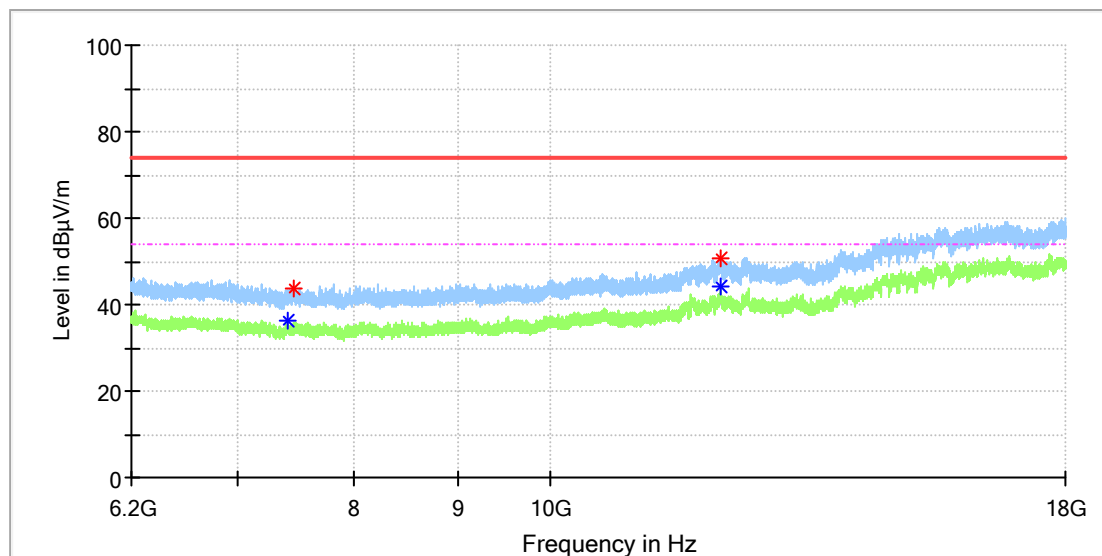

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7406.058333	---	36.51	54.00	17.49	150.0	H	260.0	8.3
7454.733333	43.88	---	74.00	30.12	150.0	H	92.0	8.5
12136.383333	---	44.19	54.00	9.81	150.0	H	126.0	16.4
12142.283333	50.85	---	74.00	23.15	150.0	H	79.0	16.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

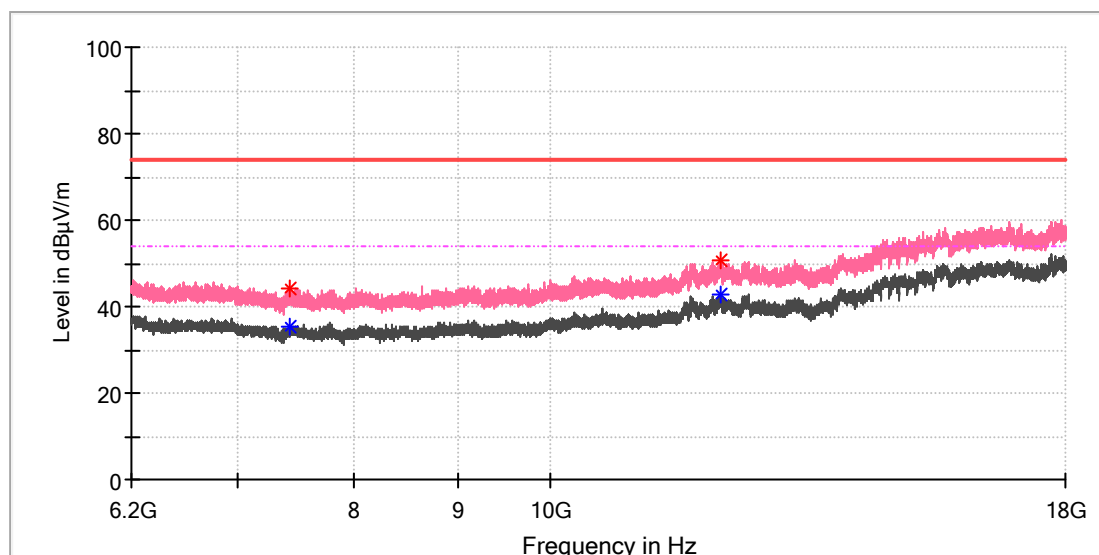

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	PoI	Azimuth (deg)	Corr. (dB/m)
7420.316667	44.08	---	74.00	29.92	150.0	V	61.0	8.4
7421.300000	---	35.51	54.00	18.49	150.0	V	277.0	8.4
12146.708333	50.55	---	74.00	23.45	150.0	V	72.0	16.6
12149.658333	---	42.81	54.00	11.19	150.0	V	5.0	16.7


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

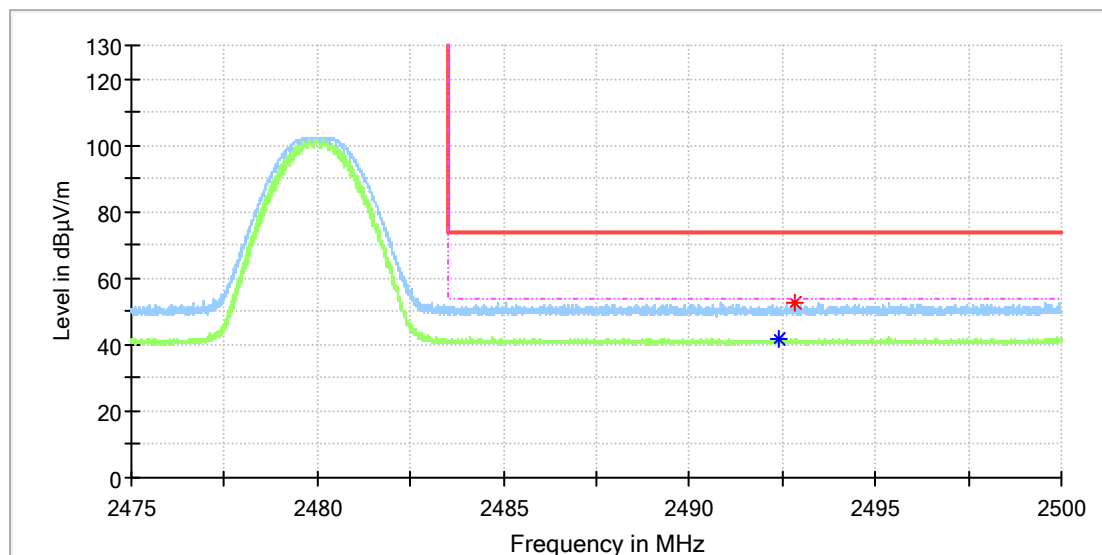

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2492.422794	---	41.75	54.00	12.25	150.0	H	333.0	9.0
2492.812500	52.67	---	74.00	21.33	150.0	H	320.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	59.5	58.5	59.5	0.0	100	h	135	0.0

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

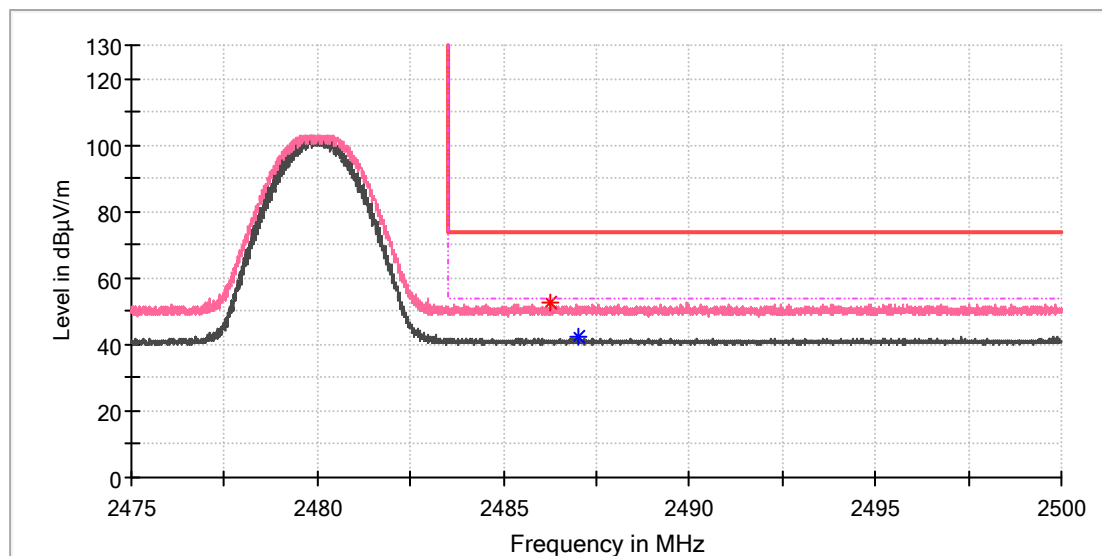

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.272059	52.60	---	74.00	21.40	150.0	V	20.0	9.0
2487.007353	---	42.26	54.00	11.74	150.0	V	152.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

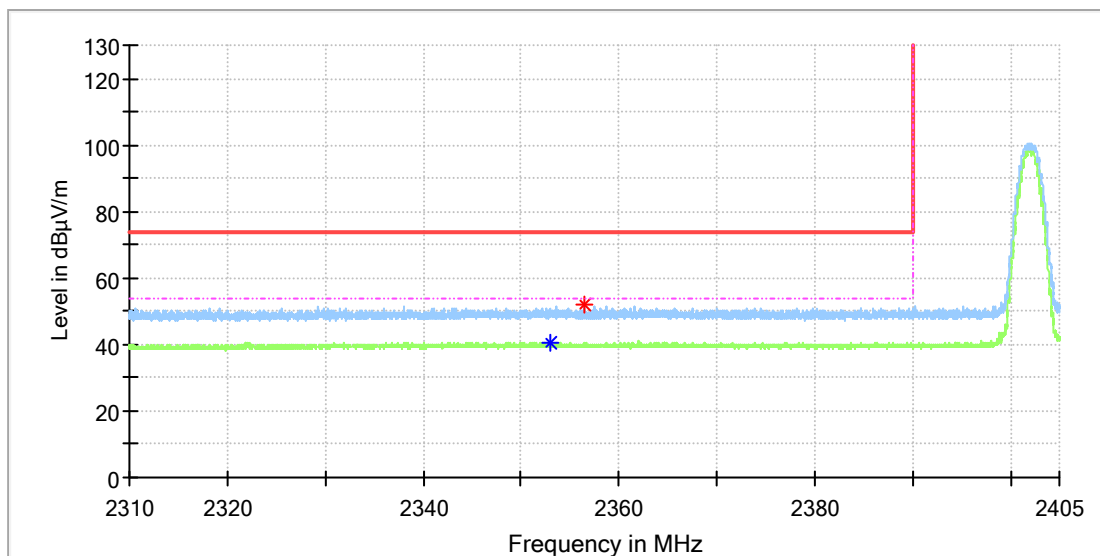

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2352.903677	---	40.64	54.00	13.36	150.0	H	272.0	8.5
2356.410294	51.87	---	74.00	22.13	150.0	H	321.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00

EUT Information

EUT Name:	General-Purpose Robot
Model:	A2
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168541455/A003981953-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

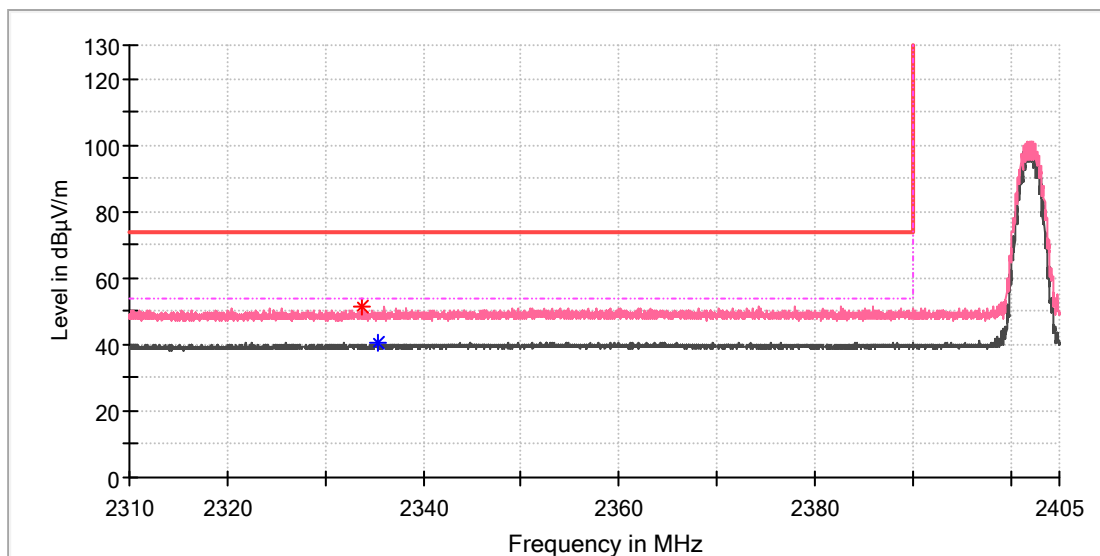

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2333.708088	51.60	---	74.00	22.40	150.0	V	41.0	8.3
2335.370588	---	40.24	54.00	13.76	150.0	V	166.0	8.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.00	100.00	100.00	100.00	100.00	100.00		100.00	100.00