

FCC/ISED Test Report

Product Name : Module
Trade Name : AirPrime
Model No. : EM7411
FCC ID : N7NEM74B
IC : 2417C-EM74B

Applicant : SIERRA WIRELESS, INC.

Address : 13811 Wireless Way, Richmond, BC, Canada V6V 3A4
Canada

Date of Receipt : Jun. 30, 2020
Issued Date : Nov. 19, 2020
Report No. : 2061278R-E3042110012
Report Version : V1.0



The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd..

Test Report Certification

Issued Date : Nov. 19, 2020

Report No. : 2061278R-E3042110012



Product Name : Module
Applicant : SIERRA WIRELESS, INC.
Address : 13811 Wireless Way, Richmond, BC, Canada V6V 3A4
Canada
Manufacturer : SIERRA WIRELESS, INC.
Trade Name : AirPrime
Model No. : EM7411
FCC ID : N7NEM74B
IC : 2417C-EM74B
EUT Voltage : DC 3.7V
Testing Voltage : DC 3.7V
Applicable Standard : FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L, Subpart M, Subpart F
FCC CFR Title 47 Part 90 Subpart S, Subpart R
ANSI/TIA-603
RSS-GEN Issue 5, RSS-130 Issue 2, RSS-132 Issue 3,
RSS-133 Issue 6, RSS-139 Issue 3, RSS-140 Issue 1,
RSS-199 Issue 3
Test Lab : Hsin Chu Laboratory
Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu
County 310, Taiwan, R.O.C.
TEL: +886-3-582-8001 / FAX: +886-3-582-8958
Test Result : Complied

Documented By :



(Demi Chang / Senior Engineering Adm. Specialist)

Tested By :



(Max Chang / Engineer)

Approved By :



(Louis Hsu / Deputy Manager)

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Nov. 19, 2020

TABLE OF CONTENTS

Description	Page
1. General Information	6
1.1. EUT Description	6
1.2. Mode of Operation	7
1.3. Tested System Details	8
1.4. Configuration of Tested System	8
1.5. Operation Descriptions	8
1.6. Comments and Remarks	9
2. Technical Test	10
2.1. Summary of Test Result	10
2.2. Test Environment	25
2.3. List of Test Equipment	27
2.4. Measurement Uncertainty	30
3. RF Output Power	31
3.1. Test Setup	31
3.2. Test Procedure	31
3.3. Test Method	31
3.4. Test Result	32
4. Occupied Bandwidth	120
4.1. Test Setup	120
4.2. Test Procedure	120
4.3. Test Method	120
4.4. Test Result	121
5. Peak To Average Ratio	435
5.1. Test Setup	435
5.2. Test Procedure	435
5.3. Test Method	435
5.4. Test Result	436
6. Spurious Emissions	636
6.1. Test Setup	636
6.2. Test Procedure	637
6.3. Test Method	637
6.4. Test Result	638
7. Spurious Emissions at Antenna Terminals	840
7.1. Test Setup	840
7.2. Test Procedure	840

7.3. Test Method	840
7.4. Test Result.....	841
8. Frequency Stability	973
8.1. Test Setup.....	973
8.2. Test Procedure	974
8.3. Test Method	974
8.4. Test Result.....	975
Attachment 1.....	1002
Test Setup Photograph	1002
Attachment 2.....	1005
EUT Photograph.....	1005
Attachment 3.....	1009
EUT Internal Photograph	1009

1. General Information

1.1. EUT Description

Product Name	Module	
Trade Name	AirPrime	
Model No.	EM7411	
Uplink Frequency Range (MHz)	Band 2: 1850~1910 Band 4: 1710~1755 Band 5: 824~849 Band 7: 2500~2570 Band 12: 699~716 Band 13: 777~787	Band 14: 788~798 Band 25: 1850~1915 Band 26: 814~849 Band 41: 2496~2690 Band 66: 1710~1780 Band 71: 663~698
Downlink Frequency Range (MHz)	Band 2: 1930~1990 Band 4: 2110~2115 Band 5: 869~894 Band 7: 2620~2690 Band 12: 729~746 Band 13: 746~756	Band 14: 758~768 Band 25: 1930~1995 Band 26: 859~894 Band 41: 2496~2690 Band 66: 2110~2200 Band 71: 617~652
Modulation	QPSK / 16QAM / 64QAM	
HW Version	1.0	
SW Version	SWI9X50C_01.13.02.00 22fdf9	
IMEI No.	356280110001130	

Antenna Information	
Trade Name	PANORAMA ANTENNAS
Model No.	PWB-7-60
Antenna Type	Dipole Antenna
Antenna Gain	698-960MHz / 2.4-2.7GHz: 4dBi 1710-2170MHz: 2dBi

Note:

1. This EM7411 supports WCDMA Band 2/4/5, LTE Band 2/4/5/7/12/13/14/25/26/41/66/71 and CA Band 5B, 7C, 41C.
2. Regarding frequency band operation, the lowest, middle and highest frequency of channel were selected to perform the test, and the details were shown on this report.
3. The EUT description is from the customer declaration.
4. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation and show the worst case in "Spurious Emissions at Antenna Terminals" & "Spurious emission".

1.2. Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Test Mode
Mode 1: LTE Band 2/25
Mode 2: LTE Band 4/66
Mode 3: LTE Band 5/26 (Part 22)
Mode 4: LTE Band 7
Mode 5: LTE Band 12
Mode 6: LTE Band 13
Mode 7: LTE Band 14
Mode 8: LTE Band 26 (Part 90)
Mode 9: LTE Band 41
Mode 10: LTE Band 71
Mode 11: LTE CA Band 5B
Mode 12: LTE CA Band 7C
Mode 13: LTE CA Band 41C

1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1 Base Station	R&S	CMW500	157118	DoC	Non-Shielded, 2m
2 Horn Antenna	Schwarzbeck	BBHA 9120D	1640	DoC	--

1.4. Configuration of Tested System

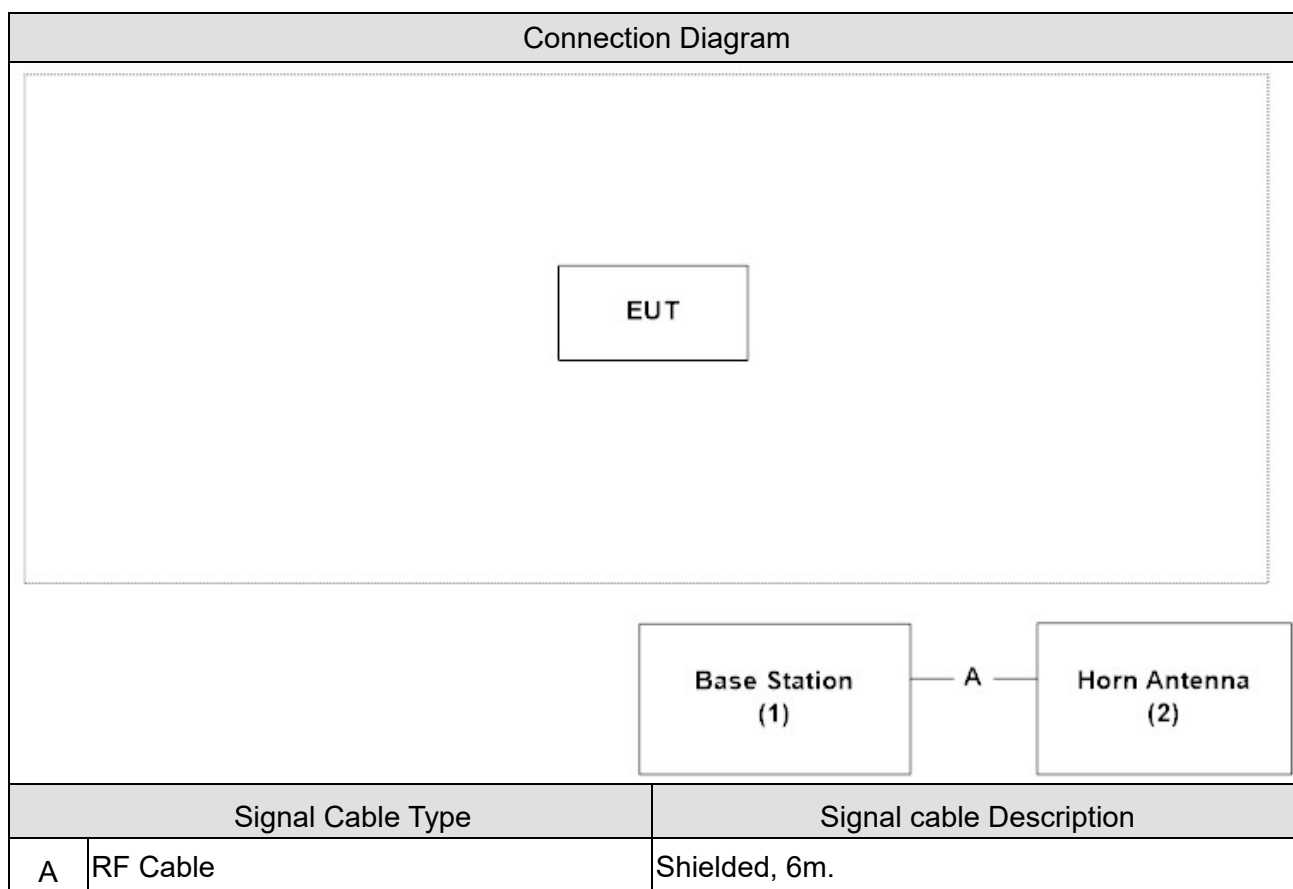

1.5. Operation Descriptions

1	Setup the EUT and simulators as shown on.
2	Turn on the power of all equipment.
3	The EUT will continue receive the signal from LTE function.
4	Repeat the above procedure.

1.6. Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

2. Technical Test

2.1. Summary of Test Result

- ☒ No deviations from the test standards
- ☐ Deviations from the test standards as below description:

B2

Uplink: 1850-1910MHz

Downlink: 1930-1990MHz

LTE B2					
FCC Part 24 Subpart E					
Industry Canada RSS-133, issue 6, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §24.232	<2 Watts	§6.4	<2 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§24.232	<13 dB	§6.4	<13 dB	Pass
Spurious Emissions	§2.1053 §24.238	<-13dBm	§6.5	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§27.238	<-13dBm	§6.5	<-13dBm	Pass
Frequency Stability	§2.1055 §24.235	<±2.5 ppm	§6.3	<±2.5 ppm	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B4

Uplink: 1710-1755MHz

Downlink: 2100-2155MHz

LTE B4					
FCC Part 27 Subpart L					
Industry Canada RSS-139, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<1 Watt	§6.5	<1 Watt	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§6.5	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-13dBm	§6.6	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	<-13dBm	§6.6	<-13dBm	Pass
Frequency Stability	§2.1055 §27.54	<2.5 ppm	§6.4	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B5

Uplink: 824-849MHz

Downlink: 869-894MHz

LTE B5					
FCC Part 22 Subpart H					
Industry Canada RSS-132, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §22.913	<7 Watts	§5.4	<7 Watts EIRP: <11.5 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§22.913	<13 dB	§5.4	<13 dB	Pass
Spurious Emissions	§2.1053 §22.917	<-13dBm	§5.5	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§22.917	<-13dBm	§5.5	<-13dBm	Pass
Frequency Stability	§2.1055 §22.335	<±2.5 ppm	§5.3	<±2.5 ppm for mobile stations <±1.5 ppm for base stations	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B7

Uplink: 2500-2570MHz

Downlink: 2620-2690MHz

LTE B7					
FCC Part 27 Subpart M					
Industry Canada RSS-199, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<2 Watts	§4.4	<2 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§4.4	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-25dBm	§4.5	<-25dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	<5MHz:-10dBm 5MHz-X MHz:-13dBm>X MHz:-25dBm	§4.5	<5MHz:-10dBm 5MHz-X MHz:-13dBm>X MHz:-25dBm	Pass
Frequency Stability	§2.1055 §27.54	<±2.5 ppm	§4.3	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B12

Uplink: 699-716MHz

Downlink: 729-746MHz

LTE B12					
FCC Part 27 Subpart F					
Industry Canada RSS-130, issue 2, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<3 Watts ERP	§4.6	<3 Watts E.R.P for portable equipment or for indoor fixed subscriber equipment	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§4.4	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-13dBm	§4.6	<-13dBm The e.i.r.p. in the band 1559-1610 MHz shall not exceed -70 dBW/MHz for wideband signal and -80 dBW for discrete emission with bandwidth less than 700 Hz.	Pass
Spurious Emissions at Antenna Terminals	§27.53	<-13dBm	§4.6	<-13dBm	Pass
Frequency Stability	§2.1055 §27.54	<±2.5 ppm	§4.3	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B13

Uplink: 777-787MHz

Downlink: 746-756MHz

LTE B13					
FCC Part 27 Subpart F					
Industry Canada RSS-130, issue 2, Industry Canada RSS-GEN					
RF Output Power	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<3 Watts ERP	§4.6	<3 Watts E.R.P for portable equipment or for indoor fixed subscriber equipment	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<-13 dB	§4.4	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-13dBm	§4.6	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	<-13dBm	§4.6	<-13dBm	Pass
Frequency Stability	§2.1055 §27.54	<±2.5 ppm	§4.5	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B14

Uplink: 788-798MHz

Downlink: 758-768MHz

LTE B14					
FCC Part 90 Subpart R					
Industry Canada RSS-140, issue 1, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §90.542	<3 Watts ERP	§4.3	<3 Watts ERP	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§4.3	<13 dB	Pass
Spurious Emissions	§2.1053 §90.543	<-13dBm	§4.4	<-13dBm <-70 dBW/MHz e.i.r.p.of all emissions, including harmonics in the band 1559-1610 MHz,	Pass
Spurious Emissions at Antenna Terminals	§90.543	<-35dBm	§4.4	<-35dBm. for mobile and portable/hand-held equipment	Pass
Frequency Stability	§2.1055 §90.543	<±2.5 ppm	§4.2	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B25

Uplink: 1850~1915MHz

Downlink: 1930~1995MHz

LTE B25					
FCC Part 24 Subpart E					
Industry Canada RSS-133, issue 6, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §24.232	<2 Watts	§6.4	<2 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§24.232	<13 dB	§6.4	<13 dB	Pass
Spurious Emissions	§2.1053 §24.238	<-13dBm	§6.5	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§27.238	<-13dBm	§6.5	<-13dBm	Pass
Frequency Stability	§2.1055 §24.235	<±2.5 ppm	§6.3	<±2.5 ppm	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B26

Uplink: 814~849MHz (ISED not support 814~824 MHz)

Downlink: 859~894MHz

LTE B26					
FCC Part 22 Subpart H					
FCC Part 90 Subpart S					
Industry Canada RSS-132, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §90.635(b) §22.913	<100 Watts	§5.4	<11.5 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§22.913	<13 dB	§5.4	<13 dB	Pass
Spurious Emissions	§2.1053 §90.691 §22.917	<-13dBm	§5.5	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§90.691 §22.917	<-13dBm	§5.5	<-13dBm	Pass
Frequency Stability	§2.1055 §90.213	<±2.5 ppm	§5.2	<±2.5ppm	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B41

Uplink: 2496~2690MHz for FCC, 2500~2690MHz for ISSED

Downlink: 2496~2690MHz

LTE B41					
FCC Part 27 Subpart M					
Industry Canada RSS-199, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<2 Watts	§4.4	<2 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§4.4	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-25dBm	§4.5	<-25dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	-25dBm	§4.5	<5MHz:-10dBm 5NHz-X MHz:-13dBm>X MHz:-25dBm	Pass
Frequency Stability	§2.1055 §27.54	<±2.5 ppm	§4.3	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B66

Uplink: 1710~1780MHz

Downlink: 2110~2200MHz

LTE B66					
FCC Part 27 Subpart L					
Industry Canada RSS-139, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<1 Watts	§6.5	<1 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§6.5	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-13dBm	§6.6	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	<-13dBm	§6.6	<-13dBm	Pass
Frequency Stability	§2.1055 §27.54	<2.5 ppm	§6.4	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

B71

Uplink: 663~698MHz

Downlink: 617~652MHz

LTE B71					
FCC Part 27 Subpart F					
Industry Canada RSS-130, issue 2, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<3 Watts	§4.6	<3 Watts E.R.P for portable equipment or for indoor fixed subscriber equipment	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§4.6	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-13dBm	§4.7	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	<-13dBm	§4.7	<-13dBm	Pass
Frequency Stability	§2.1055 §27.54	<2.5 ppm	§4.5	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

5B

Uplink: 824-849MHz

Downlink: 869-894MHz

LTE B5					
FCC Part 22 Subpart H					
Industry Canada RSS-132, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §22.913	<7 Watts	§5.4	<7 Watts EIRP: <11.5 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§22.913	<13 dB	§5.4	<13 dB	Pass
Spurious Emissions	§2.1053 §22.917	<-13dBm	§5.5	<-13dBm	Pass
Spurious Emissions at Antenna Terminals	§22.917	<-13dBm	§5.5	<-13dBm	Pass
Frequency Stability	§2.1055 §22.335	<±2.5 ppm	§5.3	<±2.5 ppm for mobile stations <±1.5 ppm for base stations	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

7C

Uplink: 2500-2570MHz

Downlink: 2620-2690MHz

LTE B7					
FCC Part 27 Subpart M					
Industry Canada RSS-199, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<2 Watts	§4.4	<2 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§4.4	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-25dBm	§4.5	<-25dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	<5MHz:-10dBm 5MHz-X MHz:-13dBm>X MHz:-25dBm	§4.5	<5MHz:-10dBm 5MHz-X MHz:-13dBm>X MHz:-25dBm	Pass
Frequency Stability	§2.1055 §27.54	<±2.5 ppm	§4.3	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

41C

Uplink: 2496~2690MHz for FCC, 2500~2690MHz for ISD

Downlink: 2496~2690MHz

LTE B41					
FCC Part 27 Subpart M					
Industry Canada RSS-199, issue 3, Industry Canada RSS-GEN					
Test item	FCC Reference section	FCC Limit	IC Reference section	IC Limit	Result
RF Output Power	§2.1033 §2.1046 §27.50	<2 Watts	§4.4	<2 Watts	Pass
Occupied Bandwidth	§2.1049	N/A	RSS-GEN §4.2	N/A	Pass
Peak-to-average power ratio	§27.50	<13 dB	§4.4	<13 dB	Pass
Spurious Emissions	§2.1053 §27.53	<-25dBm	§4.5	<-25dBm	Pass
Spurious Emissions at Antenna Terminals	§27.53	-25dBm	§4.5	<5MHz:-10dBm 5MHz-X MHz:-13dBm>X MHz:-25dBm	Pass
Frequency Stability	§2.1055 §27.54	<±2.5 ppm	§4.3	Within the frequency range	Pass

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2. Test Environment

Items	Test Item	Required	Test Site
Temperature (°C)	RF Output Power	15 - 35	2
Humidity (%RH)		20 - 75	
Temperature (°C)	Occupied Bandwidth	15 - 35	2
Humidity (%RH)		20 - 75	
Temperature (°C)	Peak To Average Ratio	15 - 35	2
Humidity (%RH)		20 - 75	
Temperature (°C)	Spurious Emission	15 - 35	2
Humidity (%RH)		20 - 75	
Temperature (°C)	Spurious Emissions at Antenna Terminals	15 - 35	2
Humidity (%RH)		20 - 75	
Temperature (°C)	Frequency Stability	15 - 35	2
Humidity (%RH)		20 - 75	

Note: Test site information refers to Laboratory Information.

Laboratory Information

USA : **FCC Registration Number: TW3024**
Canada : **IC Registration Number: 22397-1 / 22397-2 / 22397-3**

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: <http://www.dekra.com.tw>

If you have any comments, please don't hesitate to contact us. Our test sites as below:

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
Address	1. No. 75-2, 3rd Lin, WangYe Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C. 2. No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. 3. No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
Phone number	1. +886-3-592-8858 2. +886-3-582-8001 3. +886-3-582-8001
Fax number	1. +886-3-592-8859 2. +886-3-582-8958 3. +886-3-582-8958
E mail address	info.tw@dekra.com
Website	http://www.dekra.com.tw

2.3. List of Test Equipment

RF Output Power / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22
Wideband Radio Communication Tester	R&S	CMW500	106071	2020/02/03	2021/02/02

Occupied Bandwidth / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22
Wideband Radio Communication Tester	R&S	CMW500	106071	2020/02/03	2021/02/02

Peak To Average Ratio / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22
Wideband Radio Communication Tester	R&S	CMW500	106071	2020/02/03	2021/02/02

Spurious Emission / CB2-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Horn Antenna	Schwarzbeck	BBHA 9120D	639	2020/06/04	2021/06/03
Bilog Antenna	Teseq	CBL6112D	23191	2020/06/12	2021/06/11
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Signal Analyzer	R&S	FSVA40	101455	2019/10/21	2020/10/20
Horn Antenna	Schwarzbeck	BBHA 9170	202	2019/12/27	2020/12/26
Pre-Amplifier	DEKRA	AP-400C	201801231	2019/12/03	2020/12/02
Pre-Amplifier	EMCI	EMC11830I	980366	2019/12/03	2020/12/02
Horn Antenna	Schwarzbeck	BBHA 9120D	01656	2019/10/25	2020/10/24
Pre-Amplifier	DEKRA	AP-025C	12183122	2020/09/03	2021/09/02
Signal Analyzer	R&S	FSV40	101435	2020/06/24	2021/06/23
Wideband Radio Communication Tester	R&S	CMW500	106071	2020/02/03	2021/02/02
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22
Coaxial Cable(13m)	Huber+Suhner	SF104	CB2-H	2020/07/25	2021/07/24
EMI system	DEKRA	Version 1.0	CB2-H	NA	NA
Horn Antenna	Schwarzbeck	BBHA 9120D	639	2020/06/04	2021/06/03

Spurious Emissions at Antenna Terminals / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22
Wideband Radio Communication Tester	R&S	CMW500	106071	2020/02/03	2021/02/02

Frequency Stability / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22
Wideband Radio Communication Tester	R&S	CMW500	106071	2020/02/03	2021/02/02


Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.4. Measurement Uncertainty

Test Item	Uncertainty
RF Output Power	± 1.27 dB
Occupied Bandwidth	± 10 Hz
Peak To Average Ratio	Not exceed 13 dB
Spurious Emissions	± 1.27 dB for Conducted Measurement ± 3.2 dB for Radiated Measurement
Spurious Emissions at Antenna Terminals	± 3.2 dB
Frequency Stability	± 10 Hz

3. RF Output Power

3.1. Test Setup

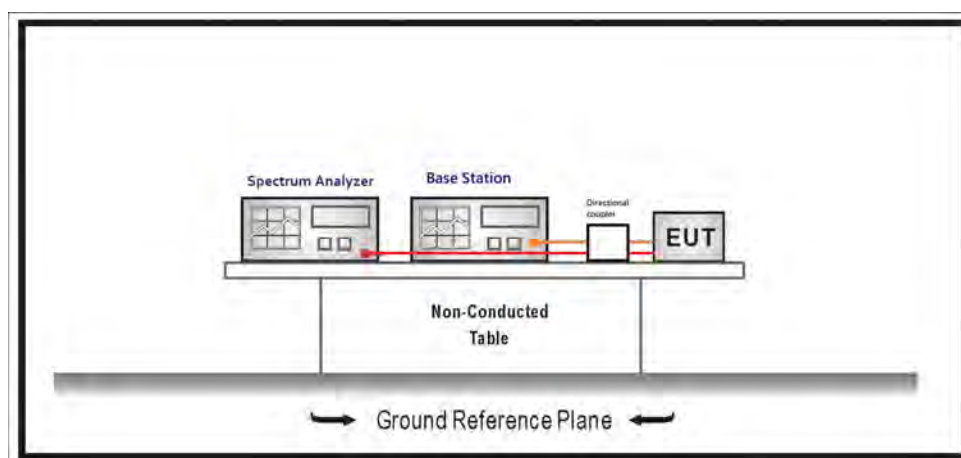

3.2. Test Procedure

- The RF output of the transmitter was connected to base station simulator.
- The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement..
- Set EUT at maximum average power by base station emulator.
- Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Effective Isotropic Radiated Power = Conducted Power(dBm) + Antenna Gain(dBi)

Effective Radiated Power = Conducted Power(dBm) + Antenna Gain(dBi) - 2.15dB

3.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 5.2.4

ANSI C63.26-2015 Sub-clause 5.2.4.2

3.4. Test Result

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 1: LTE Band 2/25		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 1.4MHz	26047 1850.7	QPSK	1	0	0	20.99	0.316	2
		QPSK		2		21.01	0.317	2
		QPSK		5		20.98	0.315	2
		QPSK	6	0	1	19.95	0.248	2
		16-QAM	1	0	1	19.87	0.244	2
		16-QAM		2		19.93	0.247	2
		16-QAM		5		19.78	0.239	2
		16-QAM	6	0	2	19.05	0.202	2
	26365 1882.5	QPSK	1	0	0	21.29	0.338	2
		QPSK		2		21.09	0.323	2
		QPSK		5		21.28	0.337	2
		QPSK	6	0	1	20.26	0.267	2
		16-QAM	1	0	1	20.32	0.270	2
		16-QAM		2		20.47	0.280	2
		16-QAM		5		20.32	0.270	2
		16-QAM	6	0	2	19.18	0.208	2
	26683 1914.3	QPSK	1	0	0	21.22	0.333	2
		QPSK		2		21.24	0.334	2
		QPSK		5		21.19	0.330	2
		QPSK	6	0	1	20.24	0.265	2
		16-QAM	1	0	1	20.23	0.265	2
		16-QAM		2		20.35	0.272	2
		16-QAM		5		20.28	0.268	2
		16-QAM	6	0	2	19.21	0.209	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 1.4MHz	26047 1850.7	64-QAM	1	0	0	19.83	0.242	2
		64-QAM		2		19.94	0.248	2
		64-QAM		5		19.86	0.243	2
		64-QAM	6	0	1	18.58	0.181	2
	26365 1882.5	64-QAM	1	0	0	20.05	0.254	2
		64-QAM		2		20.11	0.258	2
		64-QAM		5		20.08	0.256	2
		64-QAM	6	0	1	18.77	0.189	2
	26683 1914.3	64-QAM	1	0	0	20.06	0.255	2
		64-QAM		2		20.16	0.261	2
		64-QAM		5		20.05	0.254	2
		64-QAM	6	0	1	18.82	0.191	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \cdot 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 3MHz	26055 1851.5	QPSK	1	0	0	21.00	0.316	2
		QPSK		7		21.02	0.318	2
		QPSK		14		21.01	0.317	2
		QPSK	15	0	1	20.02	0.252	2
		16-QAM	1	0	1	20.03	0.253	2
		16-QAM		7		20.07	0.255	2
		16-QAM		14		20.01	0.252	2
		16-QAM	15	0	2	18.91	0.195	2
	26365 1882.5	QPSK	1	0	0	20.98	0.315	2
		QPSK		7		20.97	0.314	2
		QPSK		14		20.96	0.313	2
		QPSK	15	0	1	20.11	0.258	2
		16-QAM	1	0	1	20.12	0.258	2
		16-QAM		7		20.24	0.265	2
		16-QAM		14		20.13	0.259	2
		16-QAM	15	0	2	19.18	0.208	2
	26675 1913.5	QPSK	1	0	0	21.36	0.344	2
		QPSK		7		21.43	0.349	2
		QPSK		14		21.33	0.341	2
		QPSK	15	0	1	20.34	0.272	2
		16-QAM	1	0	1	20.38	0.274	2
		16-QAM		7		20.49	0.281	2
		16-QAM		14		20.37	0.274	2
		16-QAM	15	0	2	19.29	0.213	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 3MHz	26055 1851.5	64-QAM	1	0	0	19.82	0.241	2
		64-QAM		7		19.92	0.247	2
		64-QAM		14		19.79	0.239	2
		64-QAM	15	0	1	18.44	0.175	2
	26365 1882.5	64-QAM	1	0	0	19.63	0.231	2
		64-QAM		7		19.96	0.249	2
		64-QAM		14		19.62	0.230	2
		64-QAM	15	0	1	18.37	0.173	2
	26675 1913.5	64-QAM	1	0	0	20.03	0.253	2
		64-QAM		7		20.13	0.259	2
		64-QAM		14		19.99	0.251	2
		64-QAM	15	0	1	18.74	0.188	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \cdot 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 5MHz	26065 1852.5	QPSK	1	0	0	21.14	0.327	2
		QPSK		12		21.18	0.330	2
		QPSK		24		21.08	0.322	2
		QPSK	25	0	1	20.05	0.254	2
		16-QAM	1	0	1	20.20	0.263	2
		16-QAM		12		20.33	0.271	2
		16-QAM		24		20.25	0.266	2
		16-QAM	25	0	2	19.08	0.203	2
	26365 1882.5	QPSK	1	0	0	21.27	0.337	2
		QPSK		12		21.31	0.340	2
		QPSK		24		21.21	0.332	2
		QPSK	25	0	1	20.11	0.258	2
		16-QAM	1	0	1	20.13	0.259	2
		16-QAM		12		20.19	0.262	2
		16-QAM		24		20.08	0.256	2
		16-QAM	25	0	2	19.17	0.207	2
	26665 1912.5	QPSK	1	0	0	21.50	0.355	2
		QPSK		12		21.58	0.361	2
		QPSK		24		21.47	0.352	2
		QPSK	25	0	1	20.45	0.279	2
		16-QAM	1	0	1	20.65	0.292	2
		16-QAM		12		20.75	0.299	2
		16-QAM		24		20.62	0.290	2
		16-QAM	25	0	2	19.35	0.216	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 5MHz	26065 1852.5	64-QAM	1	0	0	19.98	0.250	2
		64-QAM		12		20.06	0.255	2
		64-QAM		24		19.95	0.248	2
		64-QAM	25	0	1	18.53	0.179	2
	26365 1882.5	64-QAM	1	0	0	19.87	0.244	2
		64-QAM		12		19.92	0.247	2
		64-QAM		24		19.86	0.243	2
		64-QAM	25	0	1	18.67	0.185	2
	26665 1912.5	64-QAM	1	0	0	19.88	0.244	2
		64-QAM		12		19.97	0.249	2
		64-QAM		24		19.92	0.247	2
		64-QAM	25	0	1	18.69	0.186	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \cdot 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 10MHz	26090 1855	QPSK	1	0	0	21.05	0.320	2
		QPSK		24		21.02	0.318	2
		QPSK		49		20.98	0.315	2
		QPSK	50	0	1	20.17	0.261	2
		16-QAM	1	0	1	20.24	0.265	2
		16-QAM		24		20.25	0.266	2
		16-QAM		49		20.24	0.265	2
		16-QAM	50	0	2	19.15	0.207	2
	26365 1882.5	QPSK	1	0	0	21.19	0.330	2
		QPSK		24		21.17	0.329	2
		QPSK		49		21.12	0.325	2
		QPSK	50	0	1	20.15	0.260	2
		16-QAM	1	0	1	20.31	0.270	2
		16-QAM		24		20.24	0.265	2
		16-QAM		49		20.21	0.264	2
		16-QAM	50	0	2	19.14	0.206	2
	26640 1910	QPSK	1	0	0	21.26	0.336	2
		QPSK		24		21.31	0.340	2
		QPSK		49		21.28	0.337	2
		QPSK	50	0	1	20.46	0.279	2
		16-QAM	1	0	1	20.58	0.287	2
		16-QAM		24		20.51	0.282	2
		16-QAM		49		20.50	0.282	2
		16-QAM	50	0	2	19.45	0.221	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 10MHz	26090 1855	64-QAM	1	0	0	19.93	0.247	2
		64-QAM		24		20.02	0.252	2
		64-QAM		49		19.95	0.248	2
		64-QAM	50	0	1	18.46	0.176	2
	26365 1882.5	64-QAM	1	0	0	19.84	0.242	2
		64-QAM		24		19.91	0.246	2
		64-QAM		49		19.79	0.239	2
		64-QAM	50	0	1	18.42	0.175	2
	26640 1910	64-QAM	1	0	0	18.86	0.193	2
		64-QAM		24		19.96	0.249	2
		64-QAM		49		18.85	0.193	2
		64-QAM	50	0	1	18.47	0.177	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \cdot 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 15MHz	26115 1857.5	QPSK	1	0	0	21.14	0.327	2
		QPSK		37		21.03	0.318	2
		QPSK		74		21.12	0.325	2
		QPSK	75	0	1	21.07	0.321	2
		16-QAM	1	0	1	20.37	0.274	2
		16-QAM		37		20.28	0.268	2
		16-QAM		74		20.42	0.277	2
		16-QAM	75	0	2	19.14	0.206	2
	26365 1882.5	QPSK	1	0	0	21.26	0.336	2
		QPSK		37		21.23	0.333	2
		QPSK		74		21.21	0.332	2
		QPSK	75	0	1	20.17	0.261	2
		16-QAM	1	0	1	20.42	0.277	2
		16-QAM		37		20.27	0.267	2
		16-QAM		74		20.23	0.265	2
		16-QAM	75	0	2	19.17	0.207	2
	26615 1907.5	QPSK	1	0	0	21.59	0.362	2
		QPSK		37		21.48	0.353	2
		QPSK		74		21.36	0.344	2
		QPSK	75	0	1	20.58	0.287	2
		16-QAM	1	0	1	20.88	0.308	2
		16-QAM		37		20.83	0.304	2
		16-QAM		74		20.85	0.305	2
		16-QAM	75	0	2	19.58	0.228	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 15MHz	26115 1857.5	64-QAM	1	0	0	19.96	0.249	2
		64-QAM		37		20.04	0.254	2
		64-QAM		74		19.91	0.246	2
		64-QAM	75	0	1	18.49	0.177	2
	26365 1882.5	64-QAM	1	0	0	19.89	0.245	2
		64-QAM		37		19.93	0.247	2
		64-QAM		74		19.83	0.242	2
		64-QAM	75	0	1	18.43	0.175	2
	26615 1907.5	64-QAM	1	0	0	19.88	0.244	2
		64-QAM		37		19.98	0.250	2
		64-QAM		74		19.86	0.243	2
		64-QAM	75	0	1	18.47	0.177	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 20MHz	26140 1860	QPSK	1	0	0	21.36	0.344	2
		QPSK		49		21.31	0.340	2
		QPSK		99		21.17	0.329	2
		QPSK	100	0	1	20.25	0.266	2
		16-QAM	1	0	1	20.21	0.264	2
		16-QAM		49		20.09	0.256	2
		16-QAM		99		20.02	0.252	2
		16-QAM	100	0	2	19.23	0.210	2
	26365 1882.5	QPSK	1	0	0	21.62	0.365	2
		QPSK		49		21.02	0.318	2
		QPSK		99		20.91	0.310	2
		QPSK	100	0	1	20.19	0.262	2
		16-QAM	1	0	1	20.46	0.279	2
		16-QAM		49		20.41	0.276	2
		16-QAM		99		20.27	0.267	2
		16-QAM	100	0	2	19.20	0.209	2
	26590 1905	QPSK	1	0	0	21.60	0.363	2
		QPSK		49		21.43	0.349	2
		QPSK		99		21.49	0.354	2
		QPSK	100	0	1	20.62	0.290	2
		16-QAM	1	0	1	20.65	0.292	2
		16-QAM		49		20.56	0.286	2
		16-QAM		99		20.61	0.289	2
		16-QAM	100	0	2	19.61	0.230	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 25 20MHz	26140 1860	64-QAM	1	0	0	20.18	0.262	2
		64-QAM		49		20.08	0.256	2
		64-QAM		99		19.89	0.245	2
		64-QAM	100	0	1	18.59	0.182	2
	26365 1882.5	64-QAM	1	0	0	20.08	0.256	2
		64-QAM		49		19.89	0.245	2
		64-QAM		99		19.80	0.240	2
		64-QAM	100	0	1	18.55	0.180	2
	26590 1905	64-QAM	1	0	0	20.06	0.255	2
		64-QAM		49		19.95	0.248	2
		64-QAM		99		19.88	0.244	2
		64-QAM	100	0	1	18.57	0.181	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \cdot 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 2: LTE Band 4/66		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 1.4MHz	131979 1710.7	QPSK	1	0	0	21.39	0.346	1
		QPSK		2		21.49	0.354	1
		QPSK		5		21.36	0.344	1
		QPSK	6	0	1	20.41	0.276	1
		16-QAM	1	0	1	20.21	0.264	1
		16-QAM		2		20.29	0.269	1
		16-QAM		5		20.23	0.265	1
		16-QAM	6	0	2	19.41	0.219	1
	132322 1745	QPSK	1	0	0	21.54	0.358	1
		QPSK		2		21.65	0.367	1
		QPSK		5		21.57	0.361	1
		QPSK	6	0	1	20.56	0.286	1
		16-QAM	1	0	1	20.55	0.285	1
		16-QAM		2		20.58	0.287	1
		16-QAM		5		20.57	0.286	1
		16-QAM	6	0	2	19.43	0.220	1
	132665 1779.3	QPSK	1	0	0	21.21	0.332	1
		QPSK		2		21.19	0.330	1
		QPSK		5		21.18	0.330	1
		QPSK	6	0	1	20.28	0.268	1
		16-QAM	1	0	1	20.01	0.252	1
		16-QAM		2		20.06	0.255	1
		16-QAM		5		19.95	0.248	1
		16-QAM	6	0	2	19.27	0.212	1

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 1.4MHz	131979 1710.7	64-QAM	1	0	0	20.06	0.255	1
		64-QAM		2		20.14	0.259	1
		64-QAM		5		20.11	0.258	1
		64-QAM	6	0	1	18.83	0.192	1
	132322 1745	64-QAM	1	0	0	20.09	0.256	1
		64-QAM		2		20.21	0.264	1
		64-QAM		5		20.10	0.257	1
		64-QAM	6	0	1	18.86	0.193	1
	132665 1779.3	64-QAM	1	0	0	20.13	0.259	1
		64-QAM		2		20.23	0.265	1
		64-QAM		5		20.17	0.261	1
		64-QAM	6	0	1	18.96	0.198	1

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 3MHz	131987 1711.5	QPSK	1	0	0	21.24	0.334	1
		QPSK		7		21.37	0.344	1
		QPSK		14		21.25	0.335	1
		QPSK	15	0	1	20.54	0.284	1
		16-QAM	1	0	1	20.96	0.313	1
		16-QAM		7		20.97	0.314	1
		16-QAM		14		20.87	0.307	1
		16-QAM	15	0	2	20.90	0.309	1
	132322 1745	QPSK	1	0	0	21.74	0.375	1
		QPSK		7		21.77	0.378	1
		QPSK		14		21.69	0.371	1
		QPSK	15	0	1	20.66	0.292	1
		16-QAM	1	0	1	20.56	0.286	1
		16-QAM		7		20.52	0.283	1
		16-QAM		14		20.48	0.281	1
		16-QAM	15	0	2	19.61	0.230	1
	132657 1778.5	QPSK	1	0	0	21.39	0.346	1
		QPSK		7		21.38	0.345	1
		QPSK		14		21.37	0.344	1
		QPSK	15	0	1	20.41	0.276	1
		16-QAM	1	0	1	20.47	0.280	1
		16-QAM		7		20.45	0.279	1
		16-QAM		14		20.43	0.277	1
		16-QAM	15	0	2	19.46	0.222	1

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 3MHz	131987 1711.5	64-QAM	1	0	0	20.19	0.262	1
		64-QAM		7		20.28	0.268	1
		64-QAM		14		20.12	0.258	1
		64-QAM	15	0	1	18.83	0.192	1
	132322 1745	64-QAM	1	0	0	20.23	0.265	1
		64-QAM		7		20.34	0.272	1
		64-QAM		14		20.17	0.261	1
		64-QAM	15	0	1	18.89	0.195	1
	132657 1778.5	64-QAM	1	0	0	20.24	0.265	1
		64-QAM		7		20.37	0.274	1
		64-QAM		14		20.21	0.264	1
		64-QAM	15	0	1	18.91	0.195	1

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 5MHz	131997 1712.5	QPSK	1	0	0	21.39	0.346	1
		QPSK		12		21.41	0.348	1
		QPSK		24		21.29	0.338	1
		QPSK	25	0	1	20.53	0.284	1
		16-QAM	1	0	1	20.42	0.277	1
		16-QAM		12		20.56	0.286	1
		16-QAM		24		20.41	0.276	1
		16-QAM	25	0	2	19.56	0.227	1
	132322 1745	QPSK	1	0	0	21.71	0.372	1
		QPSK		12		21.77	0.378	1
		QPSK		24		21.67	0.369	1
		QPSK	25	0	1	20.71	0.296	1
		16-QAM	1	0	1	21.09	0.323	1
		16-QAM		12		21.12	0.325	1
		16-QAM		24		21.07	0.321	1
		16-QAM	25	0	2	19.67	0.233	1
	132647 1777.5	QPSK	1	0	0	21.35	0.343	1
		QPSK		12		21.39	0.346	1
		QPSK		24		21.29	0.338	1
		QPSK	25	0	1	20.42	0.277	1
		16-QAM	1	0	1	20.52	0.283	1
		16-QAM		12		20.49	0.281	1
		16-QAM		24		20.41	0.276	1
		16-QAM	25	0	2	19.49	0.223	1

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 5MHz	131997 1712.5	64-QAM	1	0	0	20.35	0.272	1
		64-QAM		12		20.20	0.263	1
		64-QAM		24		20.32	0.270	1
		64-QAM	25	0	1	18.87	0.194	1
	132322 1745	64-QAM	1	0	0	20.38	0.274	1
		64-QAM		12		20.24	0.265	1
		64-QAM		24		20.36	0.273	1
		64-QAM	25	0	1	18.89	0.195	1
	132647 1777.5	64-QAM	1	0	0	20.40	0.275	1
		64-QAM		12		20.31	0.270	1
		64-QAM		24		20.33	0.271	1
		64-QAM	25	0	1	18.92	0.196	1

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 10MHz	132022 1715	QPSK	1	0	0	21.34	0.342	1
		QPSK		24		21.19	0.330	1
		QPSK		49		21.32	0.340	1
		QPSK	50	0	1	20.50	0.282	1
		16-QAM	1	0	1	21.00	0.316	1
		16-QAM		24		20.87	0.307	1
		16-QAM		49		20.96	0.313	1
		16-QAM	50	0	2	19.52	0.225	1
	132322 1745	QPSK	1	0	0	21.79	0.379	1
		QPSK		24		21.74	0.375	1
		QPSK		49		21.70	0.372	1
		QPSK	50	0	1	20.71	0.296	1
		16-QAM	1	0	1	20.59	0.288	1
		16-QAM		24		20.57	0.286	1
		16-QAM		49		20.59	0.288	1
		16-QAM	50	0	2	19.72	0.236	1
	132622 1775	QPSK	1	0	0	21.51	0.356	1
		QPSK		24		21.42	0.348	1
		QPSK		49		21.39	0.346	1
		QPSK	50	0	1	20.47	0.280	1
		16-QAM	1	0	1	20.54	0.284	1
		16-QAM		24		20.45	0.279	1
		16-QAM		49		20.37	0.274	1
		16-QAM	50	0	2	19.54	0.226	1

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 10MHz	132022 1715	64-QAM	1	0	0	20.42	0.277	1
		64-QAM		24		20.33	0.271	1
		64-QAM		49		20.35	0.272	1
		64-QAM	50	0	1	18.92	0.196	1
	132322 1745	64-QAM	1	0	0	20.46	0.279	1
		64-QAM		24		20.35	0.272	1
		64-QAM		49		20.38	0.274	1
		64-QAM	50	0	1	18.94	0.197	1
	132622 1775	64-QAM	1	0	0	20.51	0.282	1
		64-QAM		24		20.38	0.274	1
		64-QAM		49		20.40	0.275	1
		64-QAM	50	0	1	18.99	0.199	1

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 15MHz	132047 1717.5	QPSK	1	0	0	21.39	0.346	1
		QPSK		37		21.38	0.345	1
		QPSK		74		21.40	0.347	1
		QPSK	75	0	1	20.46	0.279	1
		16-QAM	1	0	1	20.99	0.316	1
		16-QAM		37		20.97	0.314	1
		16-QAM		74		21.01	0.317	1
		16-QAM	75	0	2	19.54	0.226	1
	132322 1745	QPSK	1	0	0	21.77	0.378	1
		QPSK		37		21.74	0.375	1
		QPSK		74		21.73	0.374	1
		QPSK	75	0	1	20.70	0.295	1
		16-QAM	1	0	1	20.56	0.286	1
		16-QAM		37		20.54	0.284	1
		16-QAM		74		20.57	0.286	1
		16-QAM	75	0	2	19.76	0.238	1
	132597 1772.5	QPSK	1	0	0	21.56	0.360	1
		QPSK		37		21.38	0.345	1
		QPSK		74		21.37	0.344	1
		QPSK	75	0	1	20.48	0.281	1
		16-QAM	1	0	1	20.82	0.303	1
		16-QAM		37		20.63	0.290	1
		16-QAM		74		20.65	0.292	1
		16-QAM	75	0	2	19.51	0.224	1

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 15MHz	132047 1717.5	64-QAM	1	0	0	20.28	0.268	1
		64-QAM		37		20.22	0.264	1
		64-QAM		74		20.24	0.265	1
		64-QAM	75	0	1	19.01	0.200	1
	132322 1745	64-QAM	1	0	0	20.34	0.272	1
		64-QAM		37		20.27	0.267	1
		64-QAM		74		20.29	0.269	1
		64-QAM	75	0	1	19.04	0.201	1
	132597 1772.5	64-QAM	1	0	0	20.37	0.274	1
		64-QAM		37		20.29	0.269	1
		64-QAM		74		20.32	0.270	1
		64-QAM	75	0	1	19.05	0.202	1

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 20MHz	132072 1720	QPSK	1	0	0	21.52	0.356	1
		QPSK		49		21.35	0.343	1
		QPSK		99		21.40	0.347	1
		QPSK	100	0	1	20.56	0.286	1
		16-QAM	1	0	1	20.99	0.316	1
		16-QAM		49		20.88	0.308	1
		16-QAM		99		21.05	0.320	1
		16-QAM	100	0	2	19.61	0.230	1
	132322 1745	QPSK	1	0	0	21.85	0.385	1
		QPSK		49		21.81	0.381	1
		QPSK		99		21.83	0.383	1
		QPSK	100	0	1	20.77	0.300	1
		16-QAM	1	0	1	20.81	0.303	1
		16-QAM		49		20.69	0.294	1
		16-QAM		99		20.75	0.299	1
		16-QAM	100	0	2	19.81	0.240	1
	132572 1770	QPSK	1	0	0	21.59	0.362	1
		QPSK		49		21.33	0.341	1
		QPSK		99		21.29	0.338	1
		QPSK	100	0	1	20.57	0.286	1
		16-QAM	1	0	1	20.96	0.313	1
		16-QAM		49		20.64	0.291	1
		16-QAM		99		20.61	0.289	1
		16-QAM	100	0	2	19.58	0.228	1

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 66 20MHz	132072 1720	64-QAM	1	0	0	20.42	0.277	1
		64-QAM		49		20.25	0.266	1
		64-QAM		99		20.29	0.269	1
		64-QAM	100	0	1	19.00	0.200	1
	132322 1745	64-QAM	1	0	0	20.47	0.280	1
		64-QAM		49		20.23	0.265	1
		64-QAM		99		20.24	0.265	1
		64-QAM	100	0	1	19.02	0.200	1
	132572 1770	64-QAM	1	0	0	20.52	0.283	1
		64-QAM		49		20.35	0.272	1
		64-QAM		99		20.39	0.275	1
		64-QAM	100	0	1	19.07	0.203	1

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 3: LTE Band 5/26 (Part 22)		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 1.4MHz	26797 824.7	QPSK	1	0	0	22.37	0.167	7
		QPSK		2		22.38	0.167	7
		QPSK		5		22.33	0.165	7
		QPSK	6	0	1	21.37	0.132	7
		16-QAM	1	0	1	21.05	0.123	7
		16-QAM		2		21.16	0.126	7
		16-QAM		5		21.10	0.124	7
		16-QAM	6	0	2	20.35	0.105	7
	26915 836.5	QPSK	1	0	0	22.51	0.172	7
		QPSK		2		22.56	0.174	7
		QPSK		5		22.62	0.177	7
		QPSK	6	0	1	21.57	0.139	7
		16-QAM	1	0	1	21.40	0.133	7
		16-QAM		2		21.47	0.136	7
		16-QAM		5		21.38	0.133	7
		16-QAM	6	0	2	20.55	0.110	7
	27033 848.3	QPSK	1	0	0	22.47	0.171	7
		QPSK		2		22.49	0.171	7
		QPSK		5		22.46	0.170	7
		QPSK	6	0	1	21.40	0.133	7
		16-QAM	1	0	1	21.46	0.135	7
		16-QAM		2		21.49	0.136	7
		16-QAM		5		21.48	0.136	7
		16-QAM	6	0	2	20.32	0.104	7

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 1.4MHz	26797 824.7	64-QAM	1	0	0	21.10	0.124	7
		64-QAM		2		21.24	0.129	7
		64-QAM		5		21.08	0.124	7
		64-QAM	6	0	1	19.79	0.092	7
	26915 836.5	64-QAM	1	0	0	21.13	0.125	7
		64-QAM		2		21.25	0.129	7
		64-QAM		5		21.11	0.125	7
		64-QAM	6	0	1	19.78	0.092	7
	27033 848.3	64-QAM	1	0	0	21.05	0.123	7
		64-QAM		2		21.18	0.127	7
		64-QAM		5		21.01	0.122	7
		64-QAM	6	0	1	19.74	0.091	7

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 3MHz	26805 825.5	QPSK	1	0	0	22.33	0.165	7
		QPSK		7		22.29	0.164	7
		QPSK		14		22.27	0.163	7
		QPSK	15	0	1	21.44	0.135	7
		16-QAM	1	0	1	21.93	0.151	7
		16-QAM		7		21.94	0.151	7
		16-QAM		14		21.87	0.149	7
		16-QAM	15	0	2	20.58	0.110	7
	26915 836.5	QPSK	1	0	0	22.66	0.178	7
		QPSK		7		22.61	0.176	7
		QPSK		14		22.60	0.176	7
		QPSK	15	0	1	21.63	0.141	7
		16-QAM	1	0	1	21.51	0.137	7
		16-QAM		7		21.49	0.136	7
		16-QAM		14		21.40	0.133	7
		16-QAM	15	0	2	20.57	0.110	7
	27025 847.5	QPSK	1	0	0	22.57	0.175	7
		QPSK		7		22.53	0.173	7
		QPSK		14		22.51	0.172	7
		QPSK	15	0	1	21.52	0.137	7
		16-QAM	1	0	1	21.58	0.139	7
		16-QAM		7		21.51	0.137	7
		16-QAM		14		21.48	0.136	7
		16-QAM	15	0	2	20.54	0.109	7

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 3MHz	26805 825.5	64-QAM	1	0	0	21.27	0.129	7
		64-QAM		7		21.16	0.126	7
		64-QAM		14		21.13	0.125	7
		64-QAM	15	0	1	19.83	0.093	7
	26915 836.5	64-QAM	1	0	0	21.29	0.130	7
		64-QAM		7		21.22	0.128	7
		64-QAM		14		21.17	0.126	7
		64-QAM	15	0	1	19.86	0.094	7
	27025 847.5	64-QAM	1	0	0	21.24	0.129	7
		64-QAM		7		21.18	0.127	7
		64-QAM		14		21.12	0.125	7
		64-QAM	15	0	1	19.88	0.094	7

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 5MHz	26815 826.5	QPSK	1	0	0	22.28	0.163	7
		QPSK		12		22.33	0.165	7
		QPSK		24		22.34	0.166	7
		QPSK	25	0	1	21.30	0.130	7
		16-QAM	1	0	1	21.24	0.129	7
		16-QAM		12		21.37	0.132	7
		16-QAM		24		21.36	0.132	7
		16-QAM	25	0	2	20.37	0.105	7
	26915 836.5	QPSK	1	0	0	22.61	0.176	7
		QPSK		12		22.62	0.177	7
		QPSK		24		22.53	0.173	7
		QPSK	25	0	1	21.61	0.140	7
		16-QAM	1	0	1	22.03	0.154	7
		16-QAM		12		22.06	0.155	7
		16-QAM		24		21.95	0.151	7
		16-QAM	25	0	2	20.58	0.110	7
	27015 846.5	QPSK	1	0	0	22.48	0.171	7
		QPSK		12		22.54	0.173	7
		QPSK		24		22.48	0.171	7
		QPSK	25	0	1	21.64	0.141	7
		16-QAM	1	0	1	21.61	0.140	7
		16-QAM		12		21.71	0.143	7
		16-QAM		24		21.62	0.140	7
		16-QAM	25	0	2	20.71	0.114	7

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 5MHz	26815 826.5	64-QAM	1	0	0	21.30	0.130	7
		64-QAM		12		21.25	0.129	7
		64-QAM		24		21.22	0.128	7
		64-QAM	25	0	1	19.90	0.094	7
	26915 836.5	64-QAM	1	0	0	21.32	0.131	7
		64-QAM		12		21.24	0.129	7
		64-QAM		24		21.26	0.129	7
		64-QAM	25	0	1	19.85	0.093	7
	27015 846.5	64-QAM	1	0	0	21.29	0.130	7
		64-QAM		12		21.23	0.128	7
		64-QAM		24		21.27	0.129	7
		64-QAM	25	0	1	19.85	0.093	7

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 10MHz	26840 829	QPSK	1	0	0	22.32	0.165	7
		QPSK		24		22.34	0.166	7
		QPSK		49		22.28	0.163	7
		QPSK	50	0	1	21.52	0.137	7
		16-QAM	1	0	1	21.97	0.152	7
		16-QAM		24		21.99	0.153	7
		16-QAM		49		21.85	0.148	7
		16-QAM	50	0	2	20.56	0.110	7
	26915 836.5	QPSK	1	0	0	22.59	0.175	7
		QPSK		24		22.62	0.177	7
		QPSK		49		22.59	0.175	7
		QPSK	50	0	1	21.63	0.141	7
		16-QAM	1	0	1	21.41	0.134	7
		16-QAM		24		21.44	0.135	7
		16-QAM		49		21.42	0.134	7
		16-QAM	50	0	2	20.58	0.110	7
	26990 844	QPSK	1	0	0	22.45	0.170	7
		QPSK		24		22.48	0.171	7
		QPSK		49		22.47	0.171	7
		QPSK	50	0	1	21.48	0.136	7
		16-QAM	1	0	1	21.40	0.133	7
		16-QAM		24		21.43	0.134	7
		16-QAM		49		21.41	0.134	7
		16-QAM	50	0	2	20.51	0.109	7

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 10MHz	26840 829	64-QAM	1	0	0	21.21	0.128	7
		64-QAM		24		21.10	0.124	7
		64-QAM		49		21.13	0.125	7
		64-QAM	50	0	1	19.85	0.093	7
	26915 836.5	64-QAM	1	0	0	21.24	0.129	7
		64-QAM		24		21.12	0.125	7
		64-QAM		49		21.18	0.127	7
		64-QAM	50	0	1	19.88	0.094	7
	26990 844	64-QAM	1	0	0	21.15	0.126	7
		64-QAM		24		21.11	0.125	7
		64-QAM		49		21.06	0.123	7
		64-QAM	50	0	1	19.91	0.095	7

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 15MHz	26865 831.5	QPSK	1	0	0	22.39	0.167	7
		QPSK		37		22.29	0.164	7
		QPSK		74		22.37	0.167	7
		QPSK	75	0	1	21.44	0.135	7
		16-QAM	1	0	1	21.95	0.151	7
		16-QAM		37		22.05	0.155	7
		16-QAM		74		21.92	0.150	7
		16-QAM	75	0	2	20.50	0.108	7
	26915 836.5	QPSK	1	0	0	22.67	0.179	7
		QPSK		37		22.64	0.177	7
		QPSK		74		22.58	0.175	7
		QPSK	75	0	1	21.60	0.140	7
		16-QAM	1	0	1	21.47	0.136	7
		16-QAM		37		21.50	0.136	7
		16-QAM		74		21.44	0.135	7
		16-QAM	75	0	2	20.66	0.112	7
	26965 841.5	QPSK	1	0	0	22.60	0.176	7
		QPSK		37		22.55	0.174	7
		QPSK		74		22.43	0.169	7
		QPSK	75	0	1	21.58	0.139	7
		16-QAM	1	0	1	21.85	0.148	7
		16-QAM		37		21.87	0.149	7
		16-QAM		74		21.83	0.147	7
		16-QAM	75	0	2	20.62	0.111	7

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 15MHz	26865 831.5	64-QAM	1	0	0	21.21	0.128	7
		64-QAM		37		21.27	0.129	7
		64-QAM		74		21.13	0.125	7
		64-QAM	75	0	1	19.90	0.094	7
	26915 836.5	64-QAM	1	0	0	21.23	0.128	7
		64-QAM		37		21.34	0.132	7
		64-QAM		74		21.14	0.126	7
		64-QAM	75	0	1	19.92	0.095	7
	26965 841.5	64-QAM	1	0	0	21.19	0.127	7
		64-QAM		37		21.25	0.129	7
		64-QAM		74		21.13	0.125	7
		64-QAM	75	0	1	19.86	0.094	7

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 4: LTE Band 7		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 5MHz	20775 2502.5	QPSK	1	0	0	20.65	0.184	2
		QPSK		12		20.74	0.188	2
		QPSK		24		20.56	0.180	2
		QPSK	25	0	1	19.62	0.145	2
		16-QAM	1	0	1	19.64	0.146	2
		16-QAM		12		19.68	0.147	2
		16-QAM		24		19.59	0.144	2
		16-QAM	25	0	2	18.71	0.118	2
	21100 2535	QPSK	1	0	0	20.72	0.187	2
		QPSK		12		20.80	0.191	2
		QPSK		24		20.67	0.185	2
		QPSK	25	0	1	19.63	0.146	2
		16-QAM	1	0	1	19.88	0.154	2
		16-QAM		12		19.97	0.157	2
		16-QAM		24		19.83	0.152	2
		16-QAM	25	0	2	18.54	0.113	2
	21425 2567.5	QPSK	1	0	0	20.44	0.175	2
		QPSK		12		20.51	0.178	2
		QPSK		24		20.35	0.172	2
		QPSK	25	0	1	19.50	0.141	2
		16-QAM	1	0	1	19.57	0.144	2
		16-QAM		12		19.67	0.147	2
		16-QAM		24		19.52	0.142	2
		16-QAM	25	0	2	18.53	0.113	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 5MHz	20775 2502.5	64-QAM	1	0	0	19.13	0.130	2
		64-QAM		12		19.05	0.127	2
		64-QAM		24		19.10	0.129	2
		64-QAM	25	0	1	17.85	0.097	2
	21100 2535	64-QAM	1	0	0	19.16	0.131	2
		64-QAM		12		19.02	0.126	2
		64-QAM		24		19.13	0.130	2
		64-QAM	25	0	1	17.91	0.098	2
	21425 2567.5	64-QAM	1	0	0	19.09	0.129	2
		64-QAM		12		19.01	0.126	2
		64-QAM		24		19.15	0.130	2
		64-QAM	25	0	1	17.96	0.099	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 10MHz	20800 2505	QPSK	1	0	0	20.56	0.180	2
		QPSK		24		20.50	0.178	2
		QPSK		49		20.51	0.178	2
		QPSK	50	0	1	19.66	0.147	2
		16-QAM	1	0	1	19.85	0.153	2
		16-QAM		24		19.80	0.151	2
		16-QAM		49		19.70	0.148	2
		16-QAM	50	0	2	18.70	0.117	2
	21100 2535	QPSK	1	0	0	20.79	0.190	2
		QPSK		24		20.63	0.183	2
		QPSK		49		20.60	0.182	2
		QPSK	50	0	1	19.62	0.145	2
		16-QAM	1	0	1	19.84	0.153	2
		16-QAM		24		19.67	0.147	2
		16-QAM		49		19.63	0.146	2
		16-QAM	50	0	2	18.60	0.115	2
	21400 2565	QPSK	1	0	0	20.43	0.175	2
		QPSK		24		20.44	0.175	2
		QPSK		49		20.36	0.172	2
		QPSK	50	0	1	19.49	0.141	2
		16-QAM	1	0	1	19.50	0.141	2
		16-QAM		24		19.45	0.140	2
		16-QAM		49		19.44	0.139	2
		16-QAM	50	0	2	18.46	0.111	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 10MHz	20800 2505	64-QAM	1	0	0	19.06	0.128	2
		64-QAM		24		19.01	0.126	2
		64-QAM		49		18.95	0.124	2
		64-QAM	50	0	1	17.82	0.096	2
	21100 2535	64-QAM	1	0	0	19.21	0.132	2
		64-QAM		24		19.09	0.129	2
		64-QAM		49		18.91	0.123	2
		64-QAM	50	0	1	17.81	0.096	2
	21400 2565	64-QAM	1	0	0	19.04	0.127	2
		64-QAM		24		18.98	0.125	2
		64-QAM		49		18.88	0.122	2
		64-QAM	50	0	1	17.77	0.095	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 15MHz	20825 2507.5	QPSK	1	0	0	20.61	0.182	2
		QPSK		37		20.49	0.177	2
		QPSK		74		20.46	0.176	2
		QPSK	75	0	1	19.62	0.145	2
		16-QAM	1	0	1	19.83	0.152	2
		16-QAM		37		19.77	0.150	2
		16-QAM		74		19.78	0.151	2
		16-QAM	75	0	2	18.60	0.115	2
	21100 2535	QPSK	1	0	0	20.69	0.186	2
		QPSK		37		20.52	0.179	2
		QPSK		74		20.50	0.178	2
		QPSK	75	0	1	19.50	0.141	2
		16-QAM	1	0	1	19.89	0.155	2
		16-QAM		37		19.71	0.148	2
		16-QAM		74		19.69	0.148	2
		16-QAM	75	0	2	18.61	0.115	2
	21375 2562.5	QPSK	1	0	0	20.52	0.179	2
		QPSK		37		20.45	0.176	2
		QPSK		74		20.48	0.177	2
		QPSK	75	0	1	19.46	0.140	2
		16-QAM	1	0	1	19.87	0.154	2
		16-QAM		37		19.80	0.151	2
		16-QAM		74		19.86	0.153	2
		16-QAM	75	0	2	18.48	0.112	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 15MHz	20825 2507.5	64-QAM	1	0	0	19.19	0.132	2
		64-QAM		37		19.05	0.127	2
		64-QAM		74		19.02	0.126	2
		64-QAM	75	0	1	17.74	0.094	2
	21100 2535	64-QAM	1	0	0	19.22	0.132	2
		64-QAM		37		19.10	0.129	2
		64-QAM		74		19.01	0.126	2
		64-QAM	75	0	1	17.78	0.095	2
	21375 2562.5	64-QAM	1	0	0	19.15	0.130	2
		64-QAM		37		19.00	0.126	2
		64-QAM		74		18.94	0.124	2
		64-QAM	75	0	1	17.71	0.094	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 20MHz	20850 2510	QPSK	1	0	0	20.78	0.190	2
		QPSK		49		20.70	0.186	2
		QPSK		99		20.67	0.185	2
		QPSK	100	0	1	19.70	0.148	2
		16-QAM	1	0	1	19.89	0.155	2
		16-QAM		49		19.71	0.148	2
		16-QAM		99		19.59	0.144	2
		16-QAM	100	0	2	18.68	0.117	2
	21100 2535	QPSK	1	0	0	20.84	0.192	2
		QPSK		49		20.47	0.177	2
		QPSK		99		20.30	0.170	2
		QPSK	100	0	1	20.30	0.170	2
		16-QAM	1	0	1	19.57	0.144	2
		16-QAM		49		19.71	0.148	2
		16-QAM		99		19.64	0.146	2
		16-QAM	100	0	2	18.68	0.117	2
	21350 2560	QPSK	1	0	0	20.62	0.183	2
		QPSK		49		20.35	0.172	2
		QPSK		99		20.34	0.171	2
		QPSK	100	0	1	19.48	0.141	2
		16-QAM	1	0	1	19.71	0.148	2
		16-QAM		49		19.52	0.142	2
		16-QAM		99		19.48	0.141	2
		16-QAM	100	0	2	18.48	0.112	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 7 20MHz	20850 2510	64-QAM	1	0	0	19.24	0.133	2
		64-QAM		49		19.11	0.129	2
		64-QAM		99		19.05	0.127	2
		64-QAM	100	0	1	17.79	0.095	2
	21100 2535	64-QAM	1	0	0	19.32	0.136	2
		64-QAM		49		19.16	0.131	2
		64-QAM		99		19.08	0.128	2
		64-QAM	100	0	1	17.85	0.097	2
	21350 2560	64-QAM	1	0	0	19.19	0.132	2
		64-QAM		49		19.13	0.130	2
		64-QAM		99		19.04	0.127	2
		64-QAM	100	0	1	17.81	0.096	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 5: LTE Band 12		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 1.4MHz	23017 699.7	QPSK	1	0	0	22.64	0.177	3
		QPSK		2		22.73	0.181	3
		QPSK		5		22.66	0.178	3
		QPSK	6	0	1	21.61	0.140	3
		16-QAM	1	0	1	21.73	0.144	3
		16-QAM		2		21.82	0.147	3
		16-QAM		5		21.69	0.143	3
		16-QAM	6	0	2	20.55	0.110	3
	23095 707.5	QPSK	1	0	0	22.83	0.185	3
		QPSK		2		22.91	0.189	3
		QPSK		5		22.82	0.185	3
		QPSK	6	0	1	21.81	0.147	3
		16-QAM	1	0	1	21.76	0.145	3
		16-QAM		2		21.79	0.146	3
		16-QAM		5		21.65	0.141	3
		16-QAM	6	0	2	20.73	0.114	3
	23173 715.3	QPSK	1	0	0	22.98	0.192	3
		QPSK		2		23.08	0.196	3
		QPSK		5		23.04	0.195	3
		QPSK	6	0	1	22.02	0.154	3
		16-QAM	1	0	1	22.11	0.157	3
		16-QAM		2		22.23	0.161	3
		16-QAM		5		22.10	0.157	3
		16-QAM	6	0	2	20.99	0.121	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 1.4MHz	23017 699.7	64-QAM	1	0	0	20.94	0.120	3
		64-QAM		2		21.13	0.125	3
		64-QAM		5		20.88	0.118	3
		64-QAM	6	0	1	19.84	0.093	3
	23097 707.5	64-QAM	1	0	0	20.95	0.120	3
		64-QAM		2		21.17	0.126	3
		64-QAM		5		20.85	0.117	3
		64-QAM	6	0	1	19.82	0.093	3
	23173 715.3	64-QAM	1	0	0	20.91	0.119	3
		64-QAM		2		21.08	0.124	3
		64-QAM		5		20.82	0.117	3
		64-QAM	6	0	1	19.79	0.092	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 3MHz	23025 700.5	QPSK	1	0	0	22.53	0.173	3
		QPSK		7		22.57	0.175	3
		QPSK		14		22.62	0.177	3
		QPSK	15	0	1	21.64	0.141	3
		16-QAM	1	0	1	21.79	0.146	3
		16-QAM		7		21.81	0.147	3
		16-QAM		14		21.88	0.149	3
		16-QAM	15	0	2	20.72	0.114	3
	23095 707.5	QPSK	1	0	0	22.78	0.183	3
		QPSK		7		22.84	0.186	3
		QPSK		14		22.73	0.181	3
		QPSK	15	0	1	21.83	0.147	3
		16-QAM	1	0	1	21.79	0.146	3
		16-QAM		7		21.90	0.150	3
		16-QAM		14		21.84	0.148	3
		16-QAM	15	0	2	20.74	0.115	3
	23165 714.5	QPSK	1	0	0	22.94	0.190	3
		QPSK		7		23.10	0.197	3
		QPSK		14		23.06	0.195	3
		QPSK	15	0	1	22.06	0.155	3
		16-QAM	1	0	1	21.96	0.152	3
		16-QAM		7		22.14	0.158	3
		16-QAM		14		22.04	0.155	3
		16-QAM	15	0	2	21.01	0.122	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 3MHz	23025 700.5	64-QAM	1	0	0	20.85	0.117	3
		64-QAM		7		21.18	0.127	3
		64-QAM		14		20.83	0.117	3
		64-QAM	15	0	1	19.76	0.091	3
	23095 707.5	64-QAM	1	0	0	20.90	0.119	3
		64-QAM		7		21.22	0.128	3
		64-QAM		14		20.88	0.118	3
		64-QAM	15	0	1	19.81	0.092	3
	23165 714.5	64-QAM	1	0	0	20.86	0.118	3
		64-QAM		7		21.15	0.126	3
		64-QAM		14		20.85	0.117	3
		64-QAM	15	0	1	19.78	0.092	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 5MHz	23035 701.5	QPSK	1	0	0	22.75	0.182	3
		QPSK		12		22.47	0.171	3
		QPSK		24		22.76	0.182	3
		QPSK	25	0	1	21.75	0.145	3
		16-QAM	1	0	1	21.85	0.148	3
		16-QAM		12		22.06	0.155	3
		16-QAM		24		21.94	0.151	3
		16-QAM	25	0	2	20.72	0.114	3
	23095 707.5	QPSK	1	0	0	22.91	0.189	3
		QPSK		12		22.80	0.184	3
		QPSK		24		22.93	0.190	3
		QPSK	25	0	1	21.91	0.150	3
		16-QAM	1	0	1	21.77	0.145	3
		16-QAM		12		21.97	0.152	3
		16-QAM		24		21.74	0.144	3
		16-QAM	25	0	2	20.91	0.119	3
	23155 713.5	QPSK	1	0	0	23.00	0.193	3
		QPSK		12		22.78	0.183	3
		QPSK		24		23.20	0.202	3
		QPSK	25	0	1	22.08	0.156	3
		16-QAM	1	0	1	22.32	0.165	3
		16-QAM		12		22.45	0.170	3
		16-QAM		24		22.41	0.168	3
		16-QAM	25	0	2	20.99	0.121	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 5MHz	23035 701.5	64-QAM	1	0	0	20.86	0.118	3
		64-QAM		12		21.01	0.122	3
		64-QAM		24		20.89	0.119	3
		64-QAM	25	0	1	19.75	0.091	3
	23095 707.5	64-QAM	1	0	0	20.93	0.120	3
		64-QAM		12		21.13	0.125	3
		64-QAM		24		20.88	0.118	3
		64-QAM	25	0	1	19.77	0.092	3
	23155 713.5	64-QAM	1	0	0	20.89	0.119	3
		64-QAM		12		21.04	0.123	3
		64-QAM		24		20.90	0.119	3
		64-QAM	25	0	1	19.71	0.090	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 10MHz	23060 704	QPSK	1	0	0	22.92	0.189	3
		QPSK		24		22.61	0.176	3
		QPSK		49		22.63	0.177	3
		QPSK	50	0	1	21.73	0.144	3
		16-QAM	1	0	1	21.74	0.144	3
		16-QAM		24		21.96	0.152	3
		16-QAM		49		21.90	0.150	3
		16-QAM	50	0	2	20.76	0.115	3
	23095 707.5	QPSK	1	0	0	23.28	0.206	3
		QPSK		24		22.90	0.188	3
		QPSK		49		22.88	0.187	3
		QPSK	50	0	1	21.97	0.152	3
		16-QAM	1	0	1	21.93	0.151	3
		16-QAM		24		22.02	0.154	3
		16-QAM		49		22.01	0.153	3
		16-QAM	50	0	2	20.98	0.121	3
	23130 711	QPSK	1	0	0	23.02	0.194	3
		QPSK		24		22.95	0.191	3
		QPSK		49		23.04	0.195	3
		QPSK	50	0	1	22.02	0.154	3
		16-QAM	1	0	1	21.93	0.151	3
		16-QAM		24		22.03	0.154	3
		16-QAM		49		22.15	0.158	3
		16-QAM	50	0	2	21.03	0.122	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 12 10MHz	23060 704	64-QAM	1	0	0	21.19	0.127	3
		64-QAM		24		20.94	0.120	3
		64-QAM		49		20.90	0.119	3
		64-QAM	50	0	1	19.80	0.092	3
	23095 707.5	64-QAM	1	0	0	21.22	0.128	3
		64-QAM		24		20.97	0.121	3
		64-QAM		49		21.01	0.122	3
		64-QAM	50	0	1	19.84	0.093	3
	23130 711	64-QAM	1	0	0	21.14	0.126	3
		64-QAM		24		20.93	0.120	3
		64-QAM		49		20.99	0.121	3
		64-QAM	50	0	1	19.83	0.093	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 6: LTE Band 13		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 13 5MHz	23205 779.5	QPSK	1	0	0	23.19	0.201	3
		QPSK		12		22.99	0.192	3
		QPSK		24		23.14	0.199	3
		QPSK	25	0	1	22.08	0.156	3
		16-QAM	1	0	1	22.42	0.169	3
		16-QAM		12		22.52	0.173	3
		16-QAM		24		22.40	0.168	3
		16-QAM	25	0	2	21.03	0.122	3
	23230 782	QPSK	1	0	0	23.21	0.202	3
		QPSK		12		23.22	0.203	3
		QPSK		24		23.13	0.199	3
		QPSK	25	0	1	22.05	0.155	3
		16-QAM	1	0	1	22.32	0.165	3
		16-QAM		12		22.26	0.163	3
		16-QAM		24		22.27	0.163	3
		16-QAM	25	0	2	21.06	0.123	3
	23255 784.5	QPSK	1	0	0	23.25	0.204	3
		QPSK		12		23.18	0.201	3
		QPSK		24		23.15	0.200	3
		QPSK	25	0	1	22.04	0.155	3
		16-QAM	1	0	1	22.01	0.153	3
		16-QAM		12		22.06	0.155	3
		16-QAM		24		22.01	0.153	3
		16-QAM	25	0	2	21.10	0.124	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 13 5MHz	23205 779.5	64-QAM	1	0	0	21.31	0.131	3
		64-QAM		12		21.15	0.126	3
		64-QAM		24		21.24	0.129	3
		64-QAM	25	0	1	19.90	0.094	3
	23230 782	64-QAM	1	0	0	21.33	0.131	3
		64-QAM		12		21.18	0.127	3
		64-QAM		24		21.25	0.129	3
		64-QAM	25	0	1	19.94	0.095	3
	23255 784.5	64-QAM	1	0	0	21.28	0.130	3
		64-QAM		12		21.17	0.126	3
		64-QAM		24		21.21	0.128	3
		64-QAM	25	0	1	19.91	0.095	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 13 10MHz	23230 782	QPSK	1	0	0	23.31	0.207	3
		QPSK		24		22.94	0.190	3
		QPSK		49		22.85	0.186	3
		QPSK	50	0	1	22.05	0.155	3
		16-QAM	1	0	1	22.27	0.163	3
		16-QAM		24		22.18	0.160	3
		16-QAM		49		22.16	0.159	3
		16-QAM	50	0	2	21.07	0.124	3
Band 13 10MHz	23230 782	64-QAM	1	0	0	21.31	0.131	3
		64-QAM		24		21.22	0.128	3
		64-QAM		49		21.28	0.130	3
		64-QAM	50	0	1	19.98	0.096	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 7: LTE Band 14		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 14 5MHz	23305 790.5	QPSK	1	0	0	23.28	0.206	3
		QPSK		12		23.26	0.205	3
		QPSK		24		23.03	0.194	3
		QPSK	25	0	1	22.17	0.159	3
		16-QAM	1	0	1	22.48	0.171	3
		16-QAM		12		22.54	0.173	3
		16-QAM		24		22.39	0.167	3
		16-QAM	25	0	2	21.05	0.123	3
	23330 793	QPSK	1	0	0	23.22	0.203	3
		QPSK		12		23.27	0.205	3
		QPSK		24		23.17	0.200	3
		QPSK	25	0	1	22.10	0.157	3
		16-QAM	1	0	1	22.27	0.163	3
		16-QAM		12		22.33	0.165	3
		16-QAM		24		22.24	0.162	3
		16-QAM	25	0	2	21.12	0.125	3
	23355 795.5	QPSK	1	0	0	23.32	0.207	3
		QPSK		12		23.26	0.205	3
		QPSK		24		23.16	0.200	3
		QPSK	25	0	1	22.05	0.155	3
		16-QAM	1	0	1	22.11	0.157	3
		16-QAM		12		22.08	0.156	3
		16-QAM		24		22.01	0.153	3
		16-QAM	25	0	2	21.14	0.126	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 14 5MHz	23305 790.5	64-QAM	1	0	0	21.58	0.139	3
		64-QAM		12		21.25	0.129	3
		64-QAM		24		21.13	0.125	3
		64-QAM	25	0	1	19.96	0.096	3
	23330 793	64-QAM	1	0	0	21.57	0.139	3
		64-QAM		12		21.28	0.130	3
		64-QAM		24		21.17	0.126	3
		64-QAM	25	0	1	19.94	0.095	3
	23355 795.5	64-QAM	1	0	0	21.55	0.138	3
		64-QAM		12		21.23	0.128	3
		64-QAM		24		21.14	0.126	3
		64-QAM	25	0	1	19.91	0.095	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 14 10MHz	23330 793	QPSK	1	0	0	23.38	0.210	3
		QPSK		24		22.99	0.192	3
		QPSK		49		22.93	0.190	3
		QPSK	50	0	1	22.12	0.157	3
		16-QAM	1	0	1	22.28	0.163	3
		16-QAM		24		22.17	0.159	3
		16-QAM		49		22.14	0.158	3
		16-QAM	50	0	2	21.12	0.125	3
Band 14 10MHz	23330 793	64-QAM	1	0	0	21.51	0.137	3
		64-QAM		24		21.39	0.133	3
		64-QAM		49		21.32	0.131	3
		64-QAM	50	0	1	19.96	0.096	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 8: LTE Band 26 (Part 90)		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 1.4MHz	26697 814.7	QPSK	1	0	0	22.50	0.172	100
		QPSK		2		22.33	0.165	100
		QPSK		5		22.42	0.169	100
		QPSK	6	0	1	21.47	0.136	100
		16-QAM	1	0	1	21.33	0.131	100
		16-QAM		2		21.40	0.133	100
		16-QAM		5		21.33	0.131	100
		16-QAM	6	0	2	20.49	0.108	100
	26740 819	QPSK	1	0	0	22.30	0.164	100
		QPSK		2		22.44	0.169	100
		QPSK		5		22.45	0.170	100
		QPSK	6	0	1	21.38	0.133	100
		16-QAM	1	0	1	21.32	0.131	100
		16-QAM		2		21.50	0.136	100
		16-QAM		5		21.43	0.134	100
		16-QAM	6	0	2	20.30	0.104	100
	26783 823.3	QPSK	1	0	0	22.24	0.162	100
		QPSK		2		22.33	0.165	100
		QPSK		5		22.28	0.163	100
		QPSK	6	0	1	21.32	0.131	100
		16-QAM	1	0	1	21.07	0.124	100
		16-QAM		2		21.12	0.125	100
		16-QAM		5		21.05	0.123	100
		16-QAM	6	0	2	20.34	0.104	100

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 1.4MHz	26697 814.7	64-QAM	1	0	0	21.02	0.122	100
		64-QAM		2		20.98	0.121	100
		64-QAM		5		20.94	0.120	100
		64-QAM	6	0	1	19.77	0.092	100
	26740 819	64-QAM	1	0	0	21.05	0.123	100
		64-QAM		2		21.01	0.122	100
		64-QAM		5		20.95	0.120	100
		64-QAM	6	0	1	19.75	0.091	100
	26783 823.3	64-QAM	1	0	0	21.03	0.122	100
		64-QAM		2		20.95	0.120	100
		64-QAM		5		20.98	0.121	100
		64-QAM	6	0	1	19.79	0.092	100

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 3MHz	26705 815.5	QPSK	1	0	0	22.42	0.169	100
		QPSK		7		22.41	0.168	100
		QPSK		14		22.38	0.167	100
		QPSK	15	0	1	21.58	0.139	100
		16-QAM	1	0	1	22.07	0.156	100
		16-QAM		7		22.06	0.155	100
		16-QAM		14		22.01	0.153	100
		16-QAM	15	0	2	20.66	0.112	100
	26740 819	QPSK	1	0	0	22.45	0.170	100
		QPSK		7		22.51	0.172	100
		QPSK		14		22.48	0.171	100
		QPSK	15	0	1	21.50	0.136	100
		16-QAM	1	0	1	21.28	0.130	100
		16-QAM		7		21.37	0.132	100
		16-QAM		14		21.29	0.130	100
		16-QAM	15	0	2	20.49	0.108	100
	26775 822.5	QPSK	1	0	0	22.38	0.167	100
		QPSK		7		22.46	0.170	100
		QPSK		14		22.41	0.168	100
		QPSK	15	0	1	21.47	0.136	100
		16-QAM	1	0	1	21.49	0.136	100
		16-QAM		7		21.47	0.136	100
		16-QAM		14		21.41	0.134	100
		16-QAM	15	0	2	20.48	0.108	100

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 3MHz	26705 815.5	64-QAM	1	0	0	21.06	0.123	100
		64-QAM		7		21.17	0.126	100
		64-QAM		14		21.11	0.125	100
		64-QAM	15	0	1	19.79	0.092	100
	26740 819	64-QAM	1	0	0	21.10	0.124	100
		64-QAM		7		21.18	0.127	100
		64-QAM		14		21.13	0.125	100
		64-QAM	15	0	1	19.85	0.093	100
	26775 822.5	64-QAM	1	0	0	21.08	0.124	100
		64-QAM		7		21.15	0.126	100
		64-QAM		14		21.10	0.124	100
		64-QAM	15	0	1	19.82	0.093	100

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 5MHz	26715 816.5	QPSK	1	0	0	22.51	0.172	100
		QPSK		12		22.46	0.170	100
		QPSK		24		22.35	0.166	100
		QPSK	25	0	1	21.44	0.135	100
		16-QAM	1	0	1	21.45	0.135	100
		16-QAM		12		21.49	0.136	100
		16-QAM		24		21.37	0.132	100
		16-QAM	25	0	2	20.52	0.109	100
	26740 819	QPSK	1	0	0	22.39	0.167	100
		QPSK		12		22.54	0.173	100
		QPSK		24		22.43	0.169	100
		QPSK	25	0	1	21.52	0.137	100
		16-QAM	1	0	1	21.84	0.148	100
		16-QAM		12		22.01	0.153	100
		16-QAM		24		21.83	0.147	100
		16-QAM	25	0	2	20.53	0.109	100
	26765 821.5	QPSK	1	0	0	22.49	0.171	100
		QPSK		12		22.43	0.169	100
		QPSK		24		22.36	0.166	100
		QPSK	25	0	1	21.50	0.136	100
		16-QAM	1	0	1	21.58	0.139	100
		16-QAM		12		21.55	0.138	100
		16-QAM		24		21.51	0.137	100
		16-QAM	25	0	2	20.51	0.109	100

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 5MHz	26715 816.5	64-QAM	1	0	0	21.21	0.128	100
		64-QAM		12		21.16	0.126	100
		64-QAM		24		21.17	0.126	100
		64-QAM	25	0	1	19.89	0.094	100
	26740 819	64-QAM	1	0	0	21.23	0.128	100
		64-QAM		12		21.12	0.125	100
		64-QAM		24		21.18	0.127	100
		64-QAM	25	0	1	19.86	0.094	100
	26765 821.5	64-QAM	1	0	0	21.18	0.127	100
		64-QAM		12		21.08	0.124	100
		64-QAM		24		21.11	0.125	100
		64-QAM	25	0	1	19.83	0.093	100

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 26 10MHz	26740 819	QPSK	1	0	0	22.61	0.176	100
		QPSK		24		22.39	0.167	100
		QPSK		49		22.27	0.163	100
		QPSK	50	0	1	21.46	0.135	100
		16-QAM	1	0	1	22.01	0.153	100
		16-QAM		24		21.98	0.152	100
		16-QAM		49		21.87	0.149	100
		16-QAM	50	0	2	20.49	0.108	100
Band 26 10MHz	26740 819	64-QAM	1	0	0	21.18	0.127	100
		64-QAM		24		21.14	0.126	100
		64-QAM		49		21.06	0.123	100
		64-QAM	50	0	1	19.76	0.091	100

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 9: LTE Band 41 (FCC)		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 5MHz	39675 2498.5	QPSK	1	0	0	21.32	0.215	2
		QPSK		12		21.38	0.218	2
		QPSK		24		21.28	0.213	2
		QPSK	25	0	1	20.39	0.173	2
		16-QAM	1	0	1	20.50	0.178	2
		16-QAM		12		20.62	0.183	2
		16-QAM		24		20.45	0.176	2
		16-QAM	25	0	2	19.42	0.139	2
	40620 2593	QPSK	1	0	0	21.37	0.217	2
		QPSK		12		21.38	0.218	2
		QPSK		24		21.30	0.214	2
		QPSK	25	0	1	20.29	0.169	2
		16-QAM	1	0	1	20.21	0.166	2
		16-QAM		12		20.30	0.170	2
		16-QAM		24		20.15	0.164	2
		16-QAM	25	0	2	19.38	0.137	2
	41565 2687.5	QPSK	1	0	0	21.59	0.229	2
		QPSK		12		21.67	0.233	2
		QPSK		24		21.55	0.226	2
		QPSK	25	0	1	20.46	0.176	2
		16-QAM	1	0	1	20.76	0.189	2
		16-QAM		12		20.88	0.194	2
		16-QAM		24		20.75	0.188	2
		16-QAM	25	0	2	19.39	0.138	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 5MHz	39675 2498.5	64-QAM	1	0	0	20.45	0.176	2
		64-QAM		12		20.41	0.174	2
		64-QAM		24		20.22	0.167	2
		64-QAM	25	0	1	19.41	0.138	2
	40620 2593	64-QAM	1	0	0	20.44	0.175	2
		64-QAM		12		20.35	0.172	2
		64-QAM		24		20.38	0.173	2
		64-QAM	25	0	1	19.48	0.141	2
	41565 2687.5	64-QAM	1	0	0	20.39	0.173	2
		64-QAM		12		20.38	0.173	2
		64-QAM		24		20.31	0.170	2
		64-QAM	25	0	1	19.40	0.138	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 10MHz	39700 2501	QPSK	1	0	0	21.31	0.214	2
		QPSK		24		21.21	0.209	2
		QPSK		49		21.20	0.209	2
		QPSK	50	0	1	20.43	0.175	2
		16-QAM	1	0	1	20.56	0.180	2
		16-QAM		24		20.55	0.180	2
		16-QAM		49		20.49	0.177	2
		16-QAM	50	0	2	19.39	0.138	2
	40620 2593	QPSK	1	0	0	21.33	0.215	2
		QPSK		24		21.31	0.214	2
		QPSK		49		21.30	0.214	2
		QPSK	50	0	1	20.29	0.169	2
		16-QAM	1	0	1	20.45	0.176	2
		16-QAM		24		20.37	0.173	2
		16-QAM		49		20.39	0.173	2
		16-QAM	50	0	2	19.34	0.136	2
	41540 2685	QPSK	1	0	0	21.64	0.231	2
		QPSK		24		21.66	0.232	2
		QPSK		49		21.59	0.229	2
		QPSK	50	0	1	20.54	0.179	2
		16-QAM	1	0	1	20.57	0.181	2
		16-QAM		24		20.60	0.182	2
		16-QAM		49		20.54	0.179	2
		16-QAM	50	0	2	19.55	0.143	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 10MHz	39700 2501	64-QAM	1	0	0	20.56	0.180	2
		64-QAM		24		20.48	0.177	2
		64-QAM		49		20.43	0.175	2
		64-QAM	50	0	1	19.41	0.138	2
	40620 2593	64-QAM	1	0	0	20.54	0.179	2
		64-QAM		24		20.44	0.175	2
		64-QAM		49		20.43	0.175	2
		64-QAM	50	0	1	19.35	0.136	2
	41540 2685	64-QAM	1	0	0	20.49	0.177	2
		64-QAM		24		20.42	0.175	2
		64-QAM		49		20.40	0.174	2
		64-QAM	50	0	1	19.34	0.136	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 15MHz	39725 2503.5	QPSK	1	0	0	21.36	0.217	2
		QPSK		37		21.27	0.212	2
		QPSK		74		21.19	0.208	2
		QPSK	75	0	1	20.35	0.172	2
		16-QAM	1	0	1	20.65	0.184	2
		16-QAM		37		20.52	0.179	2
		16-QAM		74		20.47	0.177	2
		16-QAM	75	0	2	19.42	0.139	2
	40620 2593	QPSK	1	0	0	21.37	0.217	2
		QPSK		37		21.31	0.214	2
		QPSK		74		21.30	0.214	2
		QPSK	75	0	1	20.25	0.168	2
		16-QAM	1	0	1	20.51	0.178	2
		16-QAM		37		20.41	0.174	2
		16-QAM		74		20.40	0.174	2
		16-QAM	75	0	2	19.31	0.135	2
	41515 2682.5	QPSK	1	0	0	21.63	0.231	2
		QPSK		37		21.58	0.228	2
		QPSK		74		21.53	0.225	2
		QPSK	75	0	1	20.46	0.176	2
		16-QAM	1	0	1	20.83	0.192	2
		16-QAM		37		20.73	0.187	2
		16-QAM		74		20.67	0.185	2
		16-QAM	75	0	2	19.50	0.141	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 15MHz	39725 2503.5	64-QAM	1	0	0	20.50	0.178	2
		64-QAM		37		20.40	0.174	2
		64-QAM		74		20.35	0.172	2
		64-QAM	75	0	1	19.38	0.137	2
	40620 2593	64-QAM	1	0	0	20.47	0.177	2
		64-QAM		37		20.38	0.173	2
		64-QAM		74		20.29	0.169	2
		64-QAM	75	0	1	19.31	0.135	2
	41515 2682.5	64-QAM	1	0	0	20.45	0.176	2
		64-QAM		37		20.32	0.171	2
		64-QAM		74		20.28	0.169	2
		64-QAM	75	0	1	19.27	0.134	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 20MHz	39750 2506	QPSK	1	0	0	21.52	0.225	2
		QPSK		49		21.36	0.217	2
		QPSK		99		21.35	0.216	2
		QPSK	100	0	1	20.46	0.176	2
		16-QAM	1	0	1	20.47	0.177	2
		16-QAM		49		20.38	0.173	2
		16-QAM		99		20.31	0.170	2
		16-QAM	100	0	2	19.40	0.138	2
	40620 2593	QPSK	1	0	0	21.69	0.234	2
		QPSK		49		21.41	0.219	2
		QPSK		99		21.34	0.216	2
		QPSK	100	0	1	20.40	0.174	2
		16-QAM	1	0	1	20.68	0.185	2
		16-QAM		49		20.50	0.178	2
		16-QAM		99		20.41	0.174	2
		16-QAM	100	0	2	19.40	0.138	2
	41490 2680	QPSK	1	0	0	21.58	0.228	2
		QPSK		49		21.57	0.228	2
		QPSK		99		21.56	0.227	2
		QPSK	100	0	1	20.52	0.179	2
		16-QAM	1	0	1	20.79	0.190	2
		16-QAM		49		20.67	0.185	2
		16-QAM		99		20.66	0.185	2
		16-QAM	100	0	2	19.53	0.142	2

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 20MHz	39750 2506	64-QAM	1	0	0	20.60	0.182	2
		64-QAM		49		20.41	0.174	2
		64-QAM		99		20.43	0.175	2
		64-QAM	100	0	1	19.34	0.136	2
	40620 2593	64-QAM	1	0	0	20.65	0.184	2
		64-QAM		49		20.40	0.174	2
		64-QAM		99		20.32	0.171	2
		64-QAM	100	0	1	19.41	0.138	2
	41490 2680	64-QAM	1	0	0	20.58	0.181	2
		64-QAM		49		20.37	0.173	2
		64-QAM		99		20.35	0.172	2
		64-QAM	100	0	1	19.37	0.137	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 9: LTE Band 41 (ISED)		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 5MHz	39715 2502.5	QPSK	1	0	0	21.31	0.214	2
		QPSK		12		21.36	0.217	2
		QPSK		24		21.25	0.211	2
		QPSK	25	0	1	20.37	0.173	2
		16-QAM	1	0	1	20.52	0.179	2
		16-QAM		12		20.61	0.182	2
		16-QAM		24		20.46	0.176	2
		16-QAM	25	0	2	19.41	0.138	2
Band 41 5MHz	39675 2498.5	64-QAM	1	0	0	20.44	0.175	2
		64-QAM		12		20.43	0.175	2
		64-QAM		24		20.23	0.167	2
		64-QAM	25	0	1	19.42	0.139	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 10MHz	39740 2505	QPSK	1	0	0	21.35	0.216	2
		QPSK		24		21.27	0.212	2
		QPSK		49		21.25	0.211	2
		QPSK	50	0	1	20.41	0.174	2
		16-QAM	1	0	1	20.57	0.181	2
		16-QAM		24		20.54	0.179	2
		16-QAM		49		20.42	0.175	2
		16-QAM	50	0	2	19.34	0.136	2
Band 41 10MHz	39700 2501	64-QAM	1	0	0	20.55	0.180	2
		64-QAM		24		20.47	0.177	2
		64-QAM		49		20.41	0.174	2
		64-QAM	50	0	1	19.45	0.140	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 15MHz	39765 2507.5	QPSK	1	0	0	21.35	0.216	2
		QPSK		37		21.23	0.210	2
		QPSK		74		21.14	0.206	2
		QPSK	75	0	1	20.32	0.171	2
		16-QAM	1	0	1	20.64	0.184	2
		16-QAM		37		20.51	0.178	2
		16-QAM		74		20.43	0.175	2
		16-QAM	75	0	2	19.41	0.138	2
	39725 2503.5	64-QAM	1	0	0	20.49	0.177	2
		64-QAM		37		20.36	0.172	2
		64-QAM		74		20.32	0.171	2
		64-QAM	75	0	1	19.32	0.136	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) EIRP	Limit (W) EIRP
Band 41 20MHz	39790 2510	QPSK	1	0	0	21.51	0.224	2
		QPSK		49		21.37	0.217	2
		QPSK		99		21.32	0.215	2
		QPSK	100	0	1	20.44	0.175	2
		16-QAM	1	0	1	20.46	0.176	2
		16-QAM		49		20.37	0.173	2
		16-QAM		99		20.30	0.170	2
		16-QAM	100	0	2	19.39	0.138	2
	39750 2506	64-QAM	1	0	0	20.58	0.181	2
		64-QAM		49		20.44	0.175	2
		64-QAM		99		20.42	0.175	2
		64-QAM	100	0	1	19.36	0.137	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 10: LTE Band 71		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 5MHz	133147 665.5	QPSK	1	0	0	22.92	0.189	3
		QPSK		12		23.20	0.202	3
		QPSK		24		23.06	0.195	3
		QPSK	25	0	1	21.94	0.151	3
		16-QAM	1	0	1	22.35	0.166	3
		16-QAM		12		22.42	0.169	3
		16-QAM		24		22.22	0.161	3
		16-QAM	25	0	2	20.94	0.120	3
	133297 680.5	QPSK	1	0	0	23.07	0.196	3
		QPSK		12		22.80	0.184	3
		QPSK		24		22.92	0.189	3
		QPSK	25	0	1	21.89	0.149	3
		16-QAM	1	0	1	22.10	0.157	3
		16-QAM		12		22.14	0.158	3
		16-QAM		24		22.08	0.156	3
		16-QAM	25	0	2	20.92	0.119	3
	133447 695.5	QPSK	1	0	0	22.87	0.187	3
		QPSK		12		22.94	0.190	3
		QPSK		24		22.81	0.185	3
		QPSK	25	0	1	21.73	0.144	3
		16-QAM	1	0	1	21.67	0.142	3
		16-QAM		12		21.79	0.146	3
		16-QAM		24		21.65	0.141	3
		16-QAM	25	0	2	20.76	0.115	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 5MHz	133147 665.5	64-QAM	1	0	0	22.11	0.157	3
		64-QAM		12		21.88	0.149	3
		64-QAM		24		21.94	0.151	3
		64-QAM	25	0	1	20.52	0.109	3
	133297 680.5	64-QAM	1	0	0	21.83	0.147	3
		64-QAM		12		21.69	0.143	3
		64-QAM		24		21.74	0.144	3
		64-QAM	25	0	1	20.34	0.104	3
	133447 695.5	64-QAM	1	0	0	21.96	0.152	3
		64-QAM		12		21.73	0.144	3
		64-QAM		24		21.82	0.147	3
		64-QAM	25	0	1	20.31	0.104	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 10MHz	133172 668	QPSK	1	0	0	22.97	0.191	3
		QPSK		24		22.89	0.188	3
		QPSK		49		22.78	0.183	3
		QPSK	50	0	1	21.97	0.152	3
		16-QAM	1	0	1	22.14	0.158	3
		16-QAM		24		22.10	0.157	3
		16-QAM		49		22.00	0.153	3
		16-QAM	50	0	2	20.98	0.121	3
	133297 680.5	QPSK	1	0	0	23.03	0.194	3
		QPSK		24		22.99	0.192	3
		QPSK		49		22.81	0.185	3
		QPSK	50	0	1	21.90	0.150	3
		16-QAM	1	0	1	22.12	0.157	3
		16-QAM		24		22.11	0.157	3
		16-QAM		49		21.99	0.153	3
		16-QAM	50	0	2	20.85	0.117	3
	133422 693	QPSK	1	0	0	22.68	0.179	3
		QPSK		24		22.73	0.181	3
		QPSK		49		22.62	0.177	3
		QPSK	50	0	1	21.75	0.145	3
		16-QAM	1	0	1	21.80	0.146	3
		16-QAM		24		21.84	0.148	3
		16-QAM		49		21.68	0.142	3
		16-QAM	50	0	2	20.76	0.115	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 10MHz	133172 668	64-QAM	1	0	0	22.07	0.156	3
		64-QAM		24		21.91	0.150	3
		64-QAM		49		21.94	0.151	3
		64-QAM	50	0	1	20.64	0.112	3
	133297 680.5	64-QAM	1	0	0	22.02	0.154	3
		64-QAM		24		21.82	0.147	3
		64-QAM		49		21.77	0.145	3
		64-QAM	50	0	1	20.48	0.108	3
	133422 693	64-QAM	1	0	0	22.03	0.154	3
		64-QAM		24		21.85	0.148	3
		64-QAM		49		21.81	0.147	3
		64-QAM	50	0	1	20.49	0.108	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 15MHz	133197 670.5	QPSK	1	0	0	22.94	0.190	3
		QPSK		37		22.88	0.187	3
		QPSK		74		22.78	0.183	3
		QPSK	75	0	1	21.91	0.150	3
		16-QAM	1	0	1	22.19	0.160	3
		16-QAM		37		22.11	0.157	3
		16-QAM		74		22.07	0.156	3
		16-QAM	75	0	2	20.93	0.120	3
	133297 680.5	QPSK	1	0	0	22.94	0.190	3
		QPSK		37		23.00	0.193	3
		QPSK		74		22.82	0.185	3
		QPSK	75	0	1	21.88	0.149	3
		16-QAM	1	0	1	22.04	0.155	3
		16-QAM		37		22.08	0.156	3
		16-QAM		74		21.93	0.151	3
		16-QAM	75	0	2	20.97	0.121	3
	133397 690.5	QPSK	1	0	0	22.86	0.187	3
		QPSK		37		22.82	0.185	3
		QPSK		74		22.65	0.178	3
		QPSK	75	0	1	21.82	0.147	3
		16-QAM	1	0	1	22.11	0.157	3
		16-QAM		37		22.09	0.156	3
		16-QAM		74		21.83	0.147	3
		16-QAM	75	0	2	20.82	0.117	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 15MHz	133197 670.5	64-QAM	1	0	0	22.03	0.154	3
		64-QAM		37		21.96	0.152	3
		64-QAM		74		21.90	0.150	3
		64-QAM	75	0	1	20.46	0.107	3
	133297 680.5	64-QAM	1	0	0	21.97	0.152	3
		64-QAM		37		21.88	0.149	3
		64-QAM		74		21.77	0.145	3
		64-QAM	75	0	1	20.43	0.107	3
	133397 690.5	64-QAM	1	0	0	22.00	0.153	3
		64-QAM		37		21.93	0.151	3
		64-QAM		74		21.89	0.149	3
		64-QAM	75	0	1	20.42	0.106	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 20MHz	133222 673	QPSK	1	0	0	23.08	0.196	3
		QPSK		49		23.07	0.196	3
		QPSK		99		23.00	0.193	3
		QPSK	100	0	1	21.24	0.129	3
		16-QAM	1	0	1	22.00	0.153	3
		16-QAM		49		21.98	0.152	3
		16-QAM		99		21.81	0.147	3
		16-QAM	100	0	2	20.97	0.121	3
	133322 683	QPSK	1	0	0	23.23	0.203	3
		QPSK		49		22.78	0.183	3
		QPSK		99		22.54	0.173	3
		QPSK	100	0	1	21.85	0.148	3
		16-QAM	1	0	1	22.09	0.156	3
		16-QAM		49		22.17	0.159	3
		16-QAM		99		21.92	0.150	3
		16-QAM	100	0	2	20.92	0.119	3
	133372 688	QPSK	1	0	0	22.98	0.192	3
		QPSK		49		22.79	0.184	3
		QPSK		99		22.63	0.177	3
		QPSK	100	0	1	21.84	0.148	3
		16-QAM	1	0	1	21.95	0.151	3
		16-QAM		49		21.90	0.150	3
		16-QAM		99		21.68	0.142	3
		16-QAM	100	0	2	20.84	0.117	3

Band	Channel Freq. (MHz)	Modulation	RB No.	RB offset	MPR	Conducted Output Power (dBm)	RF Output Power (W) ERP	Limit (W) ERP
Band 71 20MHz	133222 673	64-QAM	1	0	0	22.27	0.163	3
		64-QAM		49		21.93	0.151	3
		64-QAM		99		21.87	0.149	3
		64-QAM	100	0	1	20.56	0.110	3
	133322 683	64-QAM	1	0	0	21.99	0.153	3
		64-QAM		49		21.86	0.148	3
		64-QAM		99		21.81	0.147	3
		64-QAM	100	0	1	20.41	0.106	3
	133372 688	64-QAM	1	0	0	22.04	0.155	3
		64-QAM		49		21.96	0.152	3
		64-QAM		99		21.93	0.151	3
		64-QAM	100	0	1	20.51	0.109	3

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 11: LTE CA Band 5B		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

PCC						SCC						Power			ERP Power			Limit
Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	QPSK (dBm)	16-QAM (dBm)	64-QAM (dBm)	QPSK RF Output Power(W) ERP	16-QAM RF Output Power(W) ERP	64-QAM RF Output Power(W) ERP	Limit (W) ERP
5	5	20428	826.8	1	24	5	10	20500	834	1	0	21.20	20.23	18.72	0.127	0.102	0.072	7
5	5	20428	826.8	25	0	5	10	20500	834	50	0	20.64	19.38	18.11	0.112	0.084	0.063	7
5	5	20478	831.8	1	24	5	10	20550	839	1	0	21.19	20.49	18.42	0.127	0.108	0.067	7
5	5	20478	831.8	25	0	5	10	20550	839	50	0	19.39	18.39	18.36	0.084	0.067	0.066	7
5	5	20528	836.8	1	24	5	10	20600	844	1	0	22.31	21.92	20.13	0.164	0.150	0.100	7
5	5	20528	836.8	25	0	5	10	20600	844	50	0	20.95	20.06	20.05	0.120	0.098	0.098	7
5	10	20450	829	1	49	5	5	20522	836.2	1	0	22.20	21.07	18.90	0.160	0.124	0.075	7
5	10	20450	829	50	0	5	5	20522	836.2	25	0	19.94	19.01	19.03	0.095	0.077	0.077	7
5	10	20500	834	1	49	5	5	20572	841.2	1	0	22.27	21.59	19.62	0.163	0.139	0.089	7
5	10	20500	834	50	0	5	5	20572	841.2	25	0	20.94	19.95	19.95	0.120	0.095	0.095	7
5	10	20550	839	1	49	5	5	20622	846.2	1	0	19.71	18.76	17.16	0.090	0.073	0.050	7
5	10	20550	839	50	0	5	5	20622	846.2	25	0	19.17	17.97	17.84	0.080	0.061	0.059	7
5	10	20450	829	1	49	5	10	20549	838.9	1	0	22.420	21.44	19.39	0.169	0.135	0.084	7
5	10	20450	829	50	0	5	10	20549	838.9	50	0	19.94	19.01	19.04	0.095	0.077	0.077	7
5	10	20476	831.6	1	49	5	10	20575	841.5	1	0	21.82	20.99	18.99	0.147	0.121	0.077	7
5	10	20476	831.6	50	0	5	10	20575	841.5	50	0	19.41	18.29	18.24	0.084	0.065	0.064	7
5	10	20501	834.1	1	49	5	10	20600	844	1	0	22.04	21.10	19.09	0.155	0.124	0.078	7
5	10	20501	834.1	50	0	5	10	20600	844	50	0	20.11	19.16	19.21	0.099	0.080	0.081	7

Note:

1. Measure Level (ERP) = Reading Level (dBm) + Antenna Gain(dBi)-2.15dB
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 12: LTE CA Band 7C		
Date of Test	2020/08/19	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

PCC						SCC						Power			ERP Power			Limit
Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	QPSK (dBm)	16-QAM (dBm)	64-QAM (dBm)	QPSK RF Output Power(W) EIRP	16-QAM RF Output Power(W) EIRP	64-QAM RF Output Power(W) EIRP	Limit (W) EIRP
7	10	20805	2505.5	1	49	7	20	20949	2519.9	1	0	22.19	21.60	19.59	0.262	0.229	0.144	2
7	10	20805	2505.5	50	0	7	20	20949	2519.9	100	0	19.83	18.91	18.91	0.152	0.123	0.123	2
7	10	21008	2525.6	1	49	7	20	21150	2540	1	0	22.35	21.85	19.60	0.272	0.243	0.145	2
7	10	21008	2525.6	50	0	7	20	21150	2540	100	0	19.98	18.98	18.97	0.158	0.125	0.125	2
7	10	21208	2545.6	1	49	7	20	21350	2560	1	0	22.21	21.39	19.33	0.264	0.218	0.136	2
7	10	21208	2545.6	50	0	7	20	21350	2560	100	0	19.76	18.79	18.82	0.15	0.12	0.121	2
7	20	20850	2510	1	99	7	10	20994	2524.4	1	0	21.66	20.97	18.75	0.232	0.198	0.119	2
7	20	20850	2510	100	0	7	10	20994	2524.4	50	0	19.89	18.92	18.92	0.155	0.124	0.124	2
7	20	21051	2530.1	1	99	7	10	21195	2544.5	1	0	21.62	20.81	18.89	0.23	0.191	0.123	2
7	20	21051	2530.1	100	0	7	10	21195	2544.5	50	0	19.93	18.93	18.92	0.156	0.124	0.124	2
7	20	21251	2550.1	1	99	7	10	21395	2564.5	1	0	21.48	20.92	18.28	0.223	0.196	0.107	2
7	20	21251	2550.1	100	0	7	10	21395	2564.5	50	0	19.78	18.80	18.83	0.151	0.12	0.121	2
7	15	20825	2507.5	1	74	7	10	20945	2519.5	1	0	22.04	21.12	19.00	0.254	0.205	0.126	2
7	15	20825	2507.5	75	0	7	10	20945	2519.5	50	0	19.95	19.01	19.01	0.157	0.126	0.126	2
7	15	21051	2530.1	1	74	7	10	21171	2542.1	1	0	21.88	21.20	19.28	0.244	0.209	0.134	2
7	15	21051	2530.1	75	0	7	10	21171	2542.1	50	0	20.05	19.06	19.09	0.16	0.128	0.129	2
7	15	21277	2552.7	1	74	7	10	21397	2564.7	1	0	21.60	21.16	18.86	0.229	0.207	0.122	2
7	15	21277	2552.7	75	0	7	10	21397	2564.7	50	0	19.94	18.96	19.02	0.156	0.125	0.126	2
7	15	20825	2507.5	1	74	7	15	20975	2522.5	1	0	22.15	21.33	19.30	0.26	0.215	0.135	2
7	15	20825	2507.5	75	0	7	15	20975	2522.5	75	0	19.83	18.89	18.85	0.152	0.123	0.122	2
7	15	21025	2527.5	1	74	7	15	21175	2542.5	1	0	22.04	21.39	19.42	0.254	0.218	0.139	2
7	15	21025	2527.5	75	0	7	15	21175	2542.5	75	0	19.85	18.88	18.91	0.153	0.122	0.123	2
7	15	21225	2547.5	1	74	7	15	21375	2562.5	1	0	21.94	21.48	19.24	0.248	0.223	0.133	2
7	15	21225	2547.5	75	0	7	15	21375	2562.5	75	0	19.81	18.84	18.88	0.152	0.121	0.122	2
7	15	20828	2507.8	1	74	7	20	20999	2524.9	1	0	22.32	21.65	19.65	0.27	0.232	0.146	2
7	15	20828	2507.8	75	0	7	20	20999	2524.9	100	0	19.88	18.74	18.77	0.147	0.119	0.119	2
7	15	21003	2525.3	1	74	7	20	21174	2542.4	1	0	22.14	21.75	19.44	0.259	0.237	0.139	2
7	15	21003	2525.3	75	0	7	20	21174	2542.4	100	0	19.72	18.77	18.75	0.149	0.119	0.119	2
7	15	21179	2542.9	1	74	7	20	21350	2560	1	0	22.19	21.33	19.29	0.262	0.215	0.135	2
7	15	21179	2542.9	75	0	7	20	21350	2560	100	0	19.68	18.71	18.74	0.147	0.118	0.119	2
7	20	20850	2510	1	99	7	15	21021	2527.1	1	0	21.98	21.24	19.05	0.25	0.211	0.127	2
7	20	20850	2510	100	0	7	15	21021	2527.1	75	0	19.84	18.90	18.89	0.153	0.123	0.123	2
7	20	21026	2527.6	1	99	7	15	21197	2544.7	1	0	21.97	21.31	18.80	0.249	0.214	0.12	2
7	20	21026	2527.6	100	0	7	15	21197	2544.7	75	0	19.79	18.81	18.84	0.151	0.121	0.121	2
7	20	21201	2545.1	1	99	7	15	21372	2562.2	1	0	21.96	21.24	18.92	0.249	0.211	0.124	2
7	20	21201	2545.1	100	0	7	15	21372	2562.2	75	0	19.77	18.79	18.76	0.15	0.12	0.119	2
7	20	20850	2510	1	99	7	20	21048	2529.8	1	0	22.47	21.45	19.49	0.28	0.221	0.141	2
7	20	20850	2510	100	0	7	20	21048	2529.8	100	0	19.74	18.74	18.74	0.149	0.119	0.119	2
7	20	21001	2525.1	1	99	7	20	21199	2544.9	1	0	22.26	21.58	19.03	0.267	0.228	0.127	2
7	20	21001	2525.1	100	0	7	20	21199	2544.9	100	0	19.72	18.71	18.75	0.149	0.118	0.119	2
7	20	21152	2540.2	1	99	7	20	21350	2560	1	0	22.17	21.56	19.00	0.261	0.227	0.126	2
7	20	21152	2540.2	100	0	7	20	21350	2560	100	0	19.74	18.76	18.78	0.149	0.118	0.12	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)

2. power (W)= (10^{(power(dBm)/10)})*10⁻³

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 13: LTE CA Band 41C (FCC)		
Date of Test	2020/09/02	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67

PCC						SCC						Power			ERP Power			Limit
Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	QPSK (dBm)	16-QAM (dBm)	64-QAM (dBm)	QPSK RF Output Power(W) EIRP	16-QAM RF Output Power(W) EIRP	64-QAM RF Output Power(W) EIRP	Limit (W) EIRP
41	5	39683	2499.3	1	24	41	20	39600	2511	1	0	22.88	22.03	19.91	0.308	0.253	0.155	2
41	5	39683	2499.3	25	0	41	20	39600	2511	100	0	20.54	19.56	19.56	0.179	0.143	0.143	2
41	5	40528	2583.8	1	24	41	20	40645	2595.5	1	0	23.09	22.39	20.47	0.323	0.275	0.177	2
41	5	40528	2583.8	25	0	41	20	40645	2595.5	100	0	20.78	19.85	19.84	0.190	0.153	0.153	2
41	5	41373	2668.3	1	24	41	20	41490	2680	1	0	22.87	22.19	20.39	0.307	0.262	0.173	2
41	5	41373	2668.3	25	0	41	20	41490	2680	100	0	20.51	19.50	19.47	0.178	0.141	0.140	2
41	20	39750	2506	1	99	41	5	39667	2517.7	1	0	22.11	21.35	19.45	0.258	0.216	0.140	2
41	20	39750	2506	100	0	41	5	39667	2517.7	25	0	20.51	19.57	19.57	0.178	0.144	0.144	2
41	20	40595	2590.5	1	99	41	5	40712	2602.2	1	0	22.16	21.44	19.58	0.261	0.221	0.144	2
41	20	40595	2590.5	100	0	41	5	40712	2602.2	25	0	20.62	19.61	19.63	0.183	0.145	0.146	2
41	20	41440	2675	1	99	41	5	41557	2686.7	1	0	21.61	20.78	18.66	0.230	0.190	0.116	2
41	20	41440	2675	100	0	41	5	41557	2686.7	25	0	20.51	19.54	19.54	0.178	0.143	0.143	2
41	10	39703	2501.3	1	49	41	15	39823	2513.3	1	0	22.95	22.01	22.01	0.313	0.252	0.252	2
41	10	39703	2501.3	50	0	41	15	39823	2513.3	75	0	20.70	19.68	19.76	0.186	0.147	0.150	2
41	10	40549	2585.9	1	49	41	15	40669	2597.9	1	0	23.04	22.18	20.07	0.319	0.262	0.161	2
41	10	40549	2585.9	50	0	41	15	40669	2597.9	75	0	20.92	19.91	19.92	0.196	0.155	0.156	2
41	10	41395	2670.5	1	49	41	15	41515	2682.5	1	0	22.82	21.75	20.19	0.303	0.237	0.166	2
41	10	41395	2670.5	50	0	41	15	41515	2682.5	75	0	20.66	19.67	19.69	0.185	0.147	0.148	2
41	15	39725	2503.5	1	74	41	10	39845	2515.5	1	0	22.49	21.55	19.45	0.281	0.226	0.140	2
41	15	39725	2503.5	75	0	41	10	39845	2515.5	50	0	20.84	19.64	19.68	0.184	0.146	0.147	2
41	15	40571	2586.1	1	74	41	10	40691	2600.1	1	0	22.64	21.75	19.58	0.291	0.237	0.144	2
41	15	40571	2586.1	75	0	41	10	40691	2600.1	50	0	20.75	19.72	19.80	0.188	0.149	0.151	2
41	15	41417	2672.7	1	74	41	10	41537	2684.7	1	0	22.47	21.35	19.70	0.280	0.216	0.148	2
41	15	41417	2672.7	75	0	41	10	41537	2684.7	50	0	20.59	19.60	19.63	0.182	0.145	0.146	2
41	10	39705	2501.5	1	49	41	20	39849	2515.9	1	0	22.96	22.03	19.93	0.313	0.253	0.156	2
41	10	39705	2501.5	50	0	41	20	39849	2515.9	100	0	20.55	19.48	19.49	0.180	0.141	0.141	2
41	10	40526	2583.6	1	49	41	20	40670	2598	1	0	23.14	22.07	20.37	0.327	0.255	0.173	2
41	10	40526	2583.6	50	0	41	20	40670	2598	100	0	20.75	19.73	19.76	0.188	0.149	0.150	2
41	10	41346	2665.6	1	49	41	20	41490	2680	1	0	23.05	21.95	19.88	0.320	0.248	0.154	2
41	10	41346	2665.6	50	0	41	20	41490	2680	100	0	20.43	19.47	19.49	0.175	0.140	0.141	2
41	20	39750	2506	1	99	41	10	39894	2520.4	1	0	22.26	21.49	19.51	0.267	0.223	0.142	2
41	20	39750	2506	100	0	41	10	39894	2520.4	50	0	20.54	19.58	19.62	0.179	0.144	0.145	2
41	20	40571	2588.1	1	99	41	10	40715	2602.5	1	0	22.37	21.64	19.75	0.274	0.231	0.150	2
41	20	40571	2588.1	100	0	41	10	40715	2602.5	50	0	20.70	19.72	19.69	0.186	0.149	0.148	2
41	20	41391	2670.1	1	99	41	10	41535	2684.5	1	0	21.94	21.12	19.05	0.248	0.205	0.127	2
41	20	41391	2670.1	100	0	41	10	41535	2684.5	50	0	20.46	19.50	19.49	0.176	0.141	0.141	2

PCC						SCC						Power			ERP Power			Limit
Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	QPSK (dBm)	16-QAM (dBm)	64-QAM (dBm)	QPSK RF Output Power(W) EIRP	16-QAM RF Output Power(W) EIRP	64-QAM RF Output Power(W) EIRP	Limit (W) EIRP
41	15	39725	2503.5	1	74	41	15	39875	2518.5	1	0	22.79	22.04	20.07	0.301	0.254	0.161	2
41	15	39725	2503.5	75	0	41	15	39875	2518.5	75	0	20.54	19.59	19.62	0.179	0.144	0.145	2
41	15	40545	2585.5	1	74	41	15	40695	2600.5	1	0	22.88	22.08	19.94	0.308	0.256	0.156	2
41	15	40545	2585.5	75	0	41	15	40695	2600.5	75	0	20.79	19.75	19.80	0.190	0.150	0.151	2
41	15	41365	2667.5	1	74	41	15	41515	2682.5	1	0	22.83	21.66	20.01	0.304	0.232	0.159	2
41	15	41365	2667.5	75	0	41	15	41515	2682.5	75	0	20.47	19.51	19.50	0.177	0.142	0.141	2
41	15	39728	2503.8	1	74	41	20	39899	2520.9	1	0	22.93	22.19	20.31	0.311	0.262	0.170	2
41	15	39728	2503.8	75	0	41	20	39899	2520.9	100	0	20.41	19.48	19.49	0.174	0.141	0.141	2
41	15	40523	2583.3	1	74	41	20	40694	2600.4	1	0	22.81	22.21	20.10	0.303	0.264	0.162	2
41	15	40523	2583.3	75	0	41	20	40694	2600.4	100	0	20.67	19.68	19.74	0.185	0.147	0.149	2
41	15	41319	2662.9	1	74	41	20	41490	2680	1	0	22.99	21.82	20.15	0.316	0.241	0.164	2
41	15	41319	2662.9	75	0	41	20	41490	2680	100	0	20.39	19.35	19.42	0.173	0.136	0.139	2
41	20	39750	2506	1	99	41	15	39921	2523.1	1	0	22.51	21.83	19.86	0.282	0.242	0.153	2
41	20	39750	2506	100	0	41	15	39921	2523.1	75	0	20.52	19.55	19.59	0.179	0.143	0.144	2
41	20	40546	2585.6	1	99	41	15	40717	2602.7	1	0	22.64	21.76	20.04	0.291	0.238	0.160	2
41	20	40546	2585.6	100	0	41	15	40717	2602.7	75	0	20.70	19.76	19.71	0.186	0.150	0.148	2
41	20	41341	2665.1	1	99	41	15	41512	2682.2	1	0	22.26	21.47	19.41	0.267	0.222	0.138	2
41	20	41341	2665.1	100	0	41	15	41512	2682.2	75	0	20.42	19.42	19.46	0.175	0.139	0.140	2
41	20	39750	2506	1	99	41	20	39948	2525.8	1	0.00	23.160	22.10	20.150	0.328	0.257	0.164	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

Product	Module		
Test Item	RF Output Power		
Test Mode	Mode 13: LTE CA Band 41C (ISED)		
Date of Test	2020/09/02	Test Site	SR12-H
Temperature(°C)	23	Humidity (%RH)	67


PCC						SCC						Power			ERP Power			Limit
Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	Band	Bandwidth (MHz)	UL Channel	UL Frequency (MHz)	UL RB No.	UL RB offset	QPSK (dBm)	16-QAM (dBm)	64-QAM (dBm)	QPSK RF Output Power(W) EIRP	16-QAM RF Output Power(W) EIRP	64-QAM RF Output Power(W) EIRP	Limit (W) EIRP
41	5	39715	2502.5	1	24	41	20	39832	2514.2	1	0	22.03	21.11	19.92	0.253	0.205	0.156	2
41	5	39715	2502.5	25	0	41	20	39832	2514.2	100	0	19.94	18.95	18.94	0.156	0.124	0.124	2
41	20	39790	2510	1	99	41	5	39907	2521.7	1	0	22.23	21.35	19.88	0.265	0.216	0.154	2
41	20	39790	2510	100	0	41	5	39907	2521.7	25	0	20.13	19.14	19.11	0.163	0.130	0.129	2
41	10	39740	2505	1	49	41	15	39860	2517	1	0	22.16	21.17	19.76	0.261	0.207	0.150	2
41	10	39740	2505	50	0	41	15	39860	2517	75	0	20.14	19.11	19.06	0.164	0.129	0.128	2
41	15	39765	2507.5	1	74	41	10	39885	2519.5	1	0	22.16	21.24	19.93	0.261	0.211	0.156	2
41	15	39765	2507.5	75	0	41	10	39885	2519.5	50	0	20.13	19.10	19.03	0.163	0.129	0.127	2
41	10	39740	2505	1	49	41	20	39884	2519.4	1	0	22.13	21.14	19.86	0.259	0.206	0.153	2
41	10	39740	2505	50	0	41	20	39884	2519.4	100	0	20.17	19.13	19.04	0.165	0.130	0.127	2
41	20	39790	2510	1	99	41	10	39934	2524.4	1	0	22.25	21.37	19.79	0.266	0.217	0.151	2
41	20	39790	2510	100	0	41	10	39934	2524.4	50	0	20.15	19.16	19.02	0.164	0.131	0.126	2
41	15	39765	2507.5	1	74	41	15	39915	2522.5	1	0	22.20	21.15	19.89	0.263	0.207	0.155	2
41	15	39765	2507.5	75	0	41	15	39915	2522.5	75	0	20.10	19.11	19.10	0.162	0.129	0.129	2
41	15	39765	2507.5	1	74	41	20	39936	2524.6	1	0	22.16	21.23	19.90	0.261	0.210	0.155	2
41	15	39765	2507.5	75	0	41	20	39936	2524.6	100	0	20.08	19.05	19.60	0.161	0.127	0.145	2
41	20	39790	2510	1	99	41	15	39961	2527.1	1	0	22.23	21.41	19.95	0.265	0.219	0.157	2
41	20	39790	2510	100	0	41	15	39961	2527.1	75	0	20.13	19.12	19.08	0.163	0.129	0.128	2
41	20	39790	2510	1	99	41	20	39988	2529.8	1	0	22.33	21.41	19.97	0.271	0.219	0.157	2
41	20	39790	2510	100	0	41	20	39988	2529.8	100	0	20.10	19.08	19.06	0.162	0.128	0.128	2

Note:

1. Measure Level (EIRP) = Reading Level (dBm) + Antenna Gain(dBi)
2. power (W)= $(10^{(\text{power(dBm)}/10)}) \times 10^{-3}$

4. Occupied Bandwidth

4.1. Test Setup

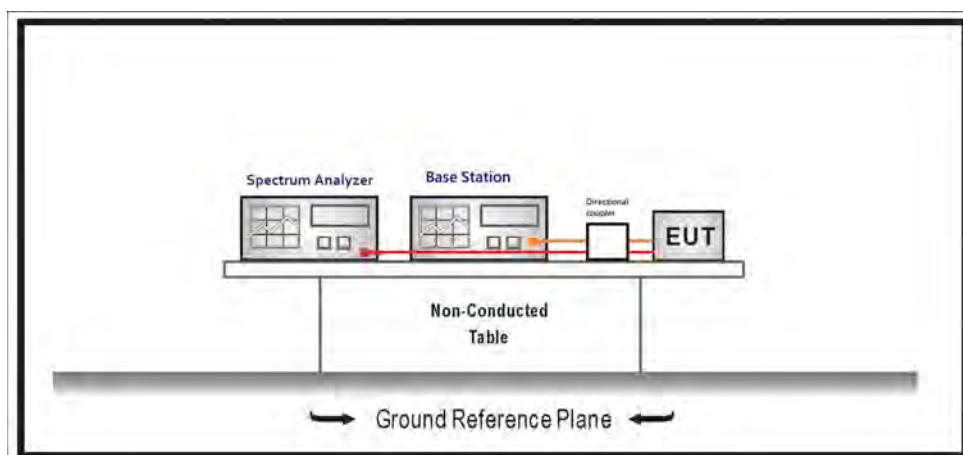

4.2. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 26 dB bandwidth and 99% occupied bandwidth of the low & middle & high channel for the highest RF powers were measured.

4.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 4.2 & 4.3
ANSI C63.26-2015 Sub-clause 5.4.3 & 5.4.4


4.4. Test Result

Product	Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: LTE Band 2/25		
Date of Test	2020/09/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	60


Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
1.4M	QPSK	1850.7	1.218	1.080	N/A
		1882.5	1.219	1.079	N/A
		1914.3	1.205	1.087	N/A
	16-QAM	1850.7	1.203	1.079	N/A
		1882.5	1.225	1.081	N/A
		1914.3	1.221	1.082	N/A
	64-QAM	1850.7	1.211	1.079	N/A
		1882.5	1.211	1.080	N/A
		1914.3	1.211	1.080	N/A
3M	QPSK	1851.5	2.940	2.691	N/A
		1882.5	2.944	2.693	N/A
		1913.5	2.951	2.687	N/A
	16-QAM	1851.5	2.937	2.684	N/A
		1882.5	2.946	2.684	N/A
		1913.5	2.948	2.685	N/A
	64-QAM	1851.5	2.919	2.683	N/A
		1882.5	2.911	2.683	N/A
		1913.5	2.907	2.685	N/A
5M	QPSK	1852.5	4.869	4.469	N/A
		1882.5	4.912	4.488	N/A
		1912.5	4.892	4.476	N/A
	16-QAM	1852.5	4.917	4.473	N/A
		1882.5	4.824	4.469	N/A
		1912.5	4.873	4.476	N/A
	64-QAM	1852.5	4.844	4.479	N/A
		1882.5	4.867	4.479	N/A
		1912.5	4.893	4.488	N/A

Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
10M	QPSK	1855	9.731	8.955	N/A
		1882.5	9.688	8.948	N/A
		1910	9.628	8.945	N/A
	16-QAM	1855	9.668	8.941	N/A
		1882.5	9.644	8.943	N/A
		1910	9.608	8.935	N/A
	64-QAM	1855	9.633	8.932	N/A
		1882.5	9.643	8.938	N/A
		1910	9.585	8.929	N/A
15M	QPSK	1857.5	14.530	13.441	N/A
		1882.5	14.500	13.403	N/A
		1907.5	14.450	13.410	N/A
	16-QAM	1857.5	14.470	13.419	N/A
		1882.5	14.450	13.389	N/A
		1907.5	14.390	13.416	N/A
	64-QAM	1857.5	14.430	13.396	N/A
		1882.5	14.350	13.365	N/A
		1907.5	14.470	13.388	N/A
20M	QPSK	1860	19.150	17.885	N/A
		1882.5	19.010	17.834	N/A
		1905	19.340	17.867	N/A
	16-QAM	1860	19.110	17.867	N/A
		1882.5	19.200	17.856	N/A
		1905	19.150	17.821	N/A
	64-QAM	1860	19.230	17.871	N/A
		1882.5	19.270	17.846	N/A
		1905	19.190	17.841	N/A


QPSK_CH26047_ 1.4M

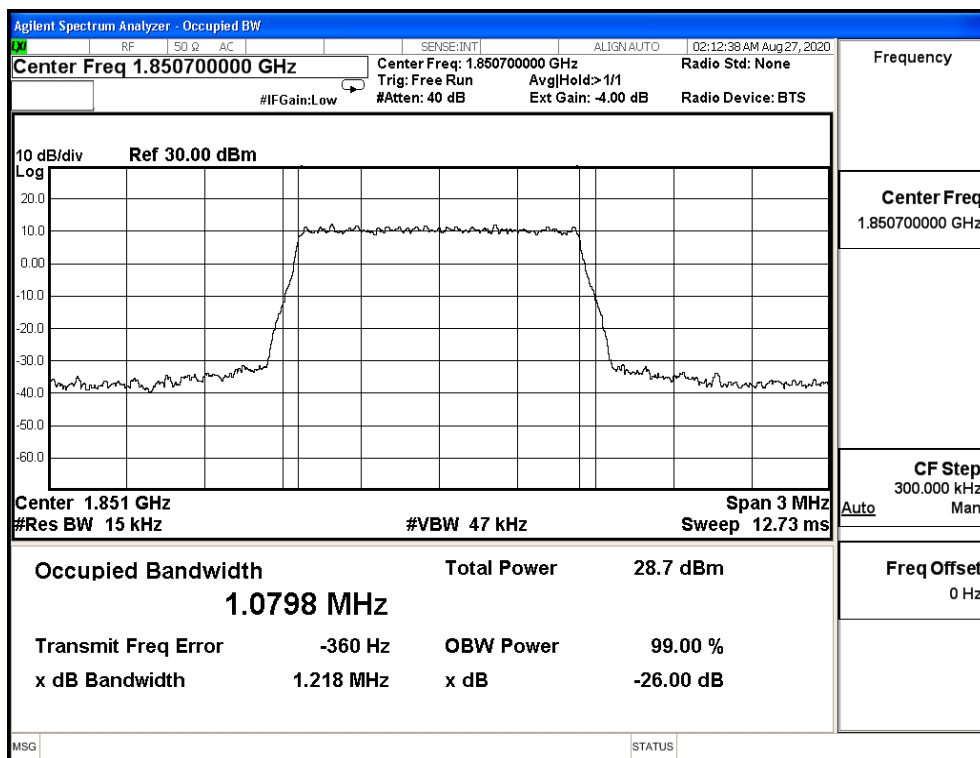


QPSK_CH26365_ 1.4M

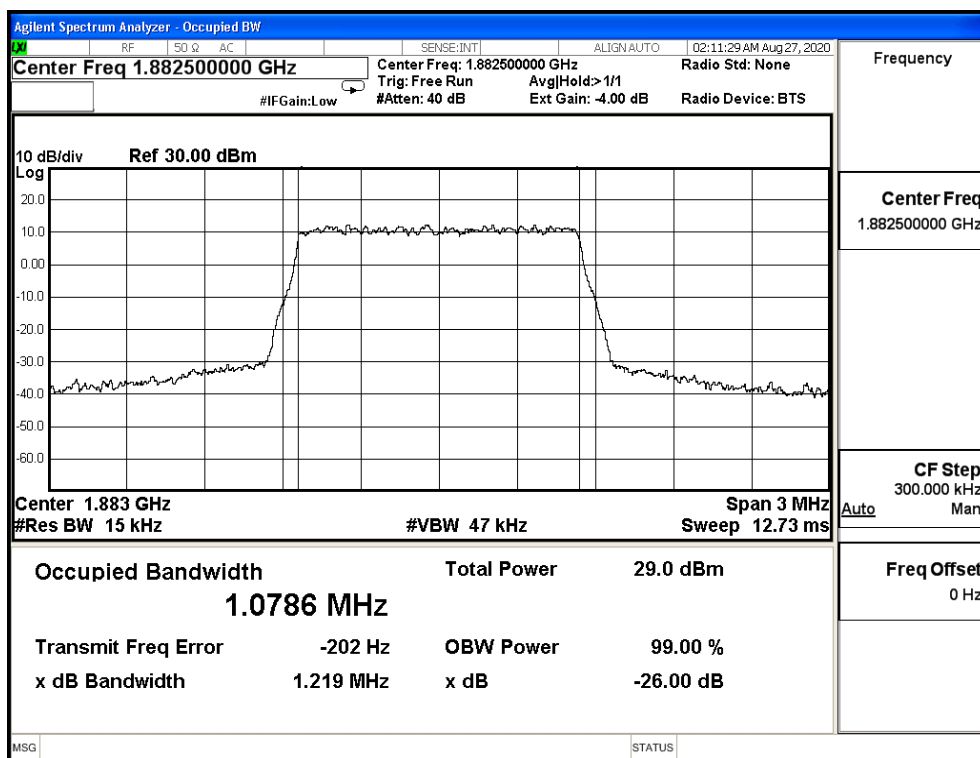


QPSK_CH26683_ 1.4M

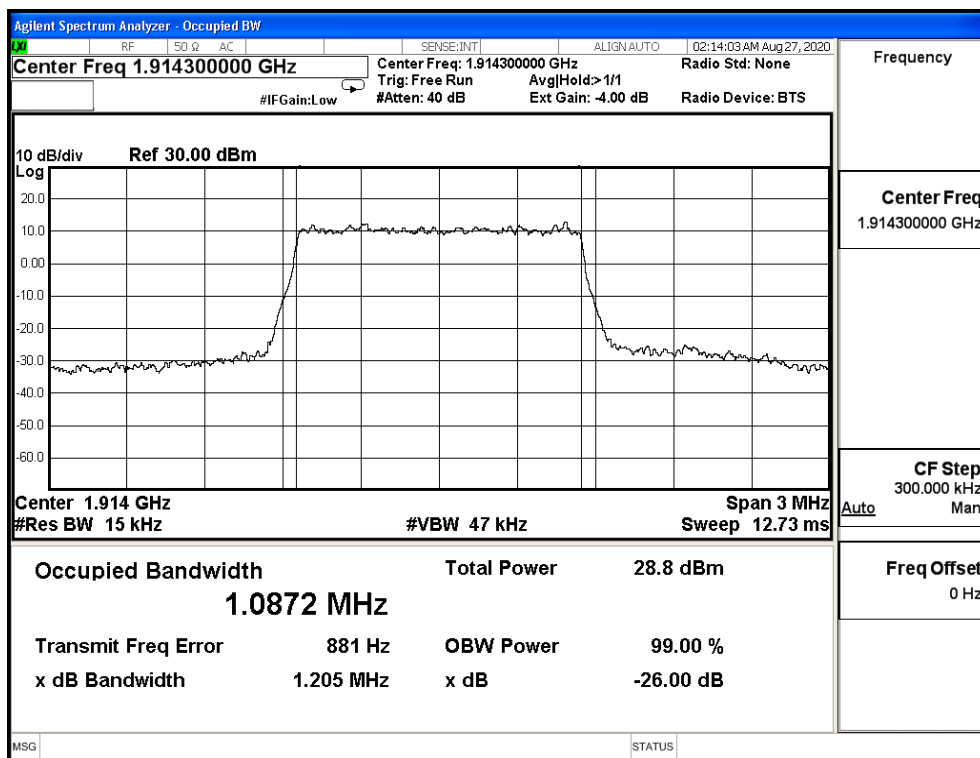


16QAM_CH26047_ 1.4M

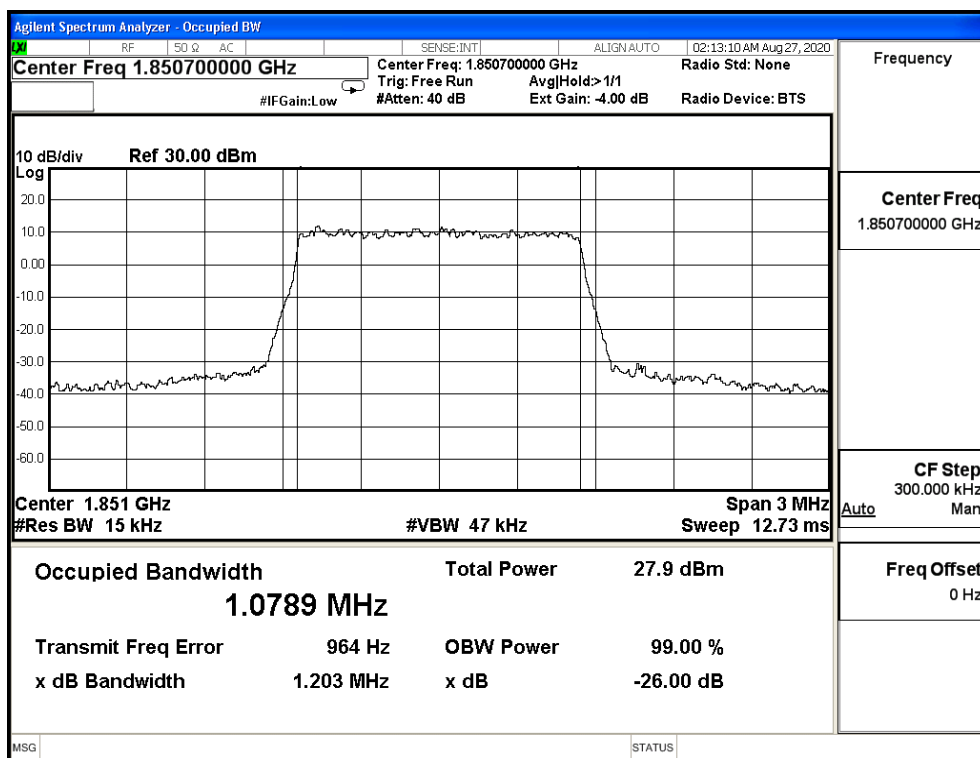


16QAM_CH26365_ 1.4M

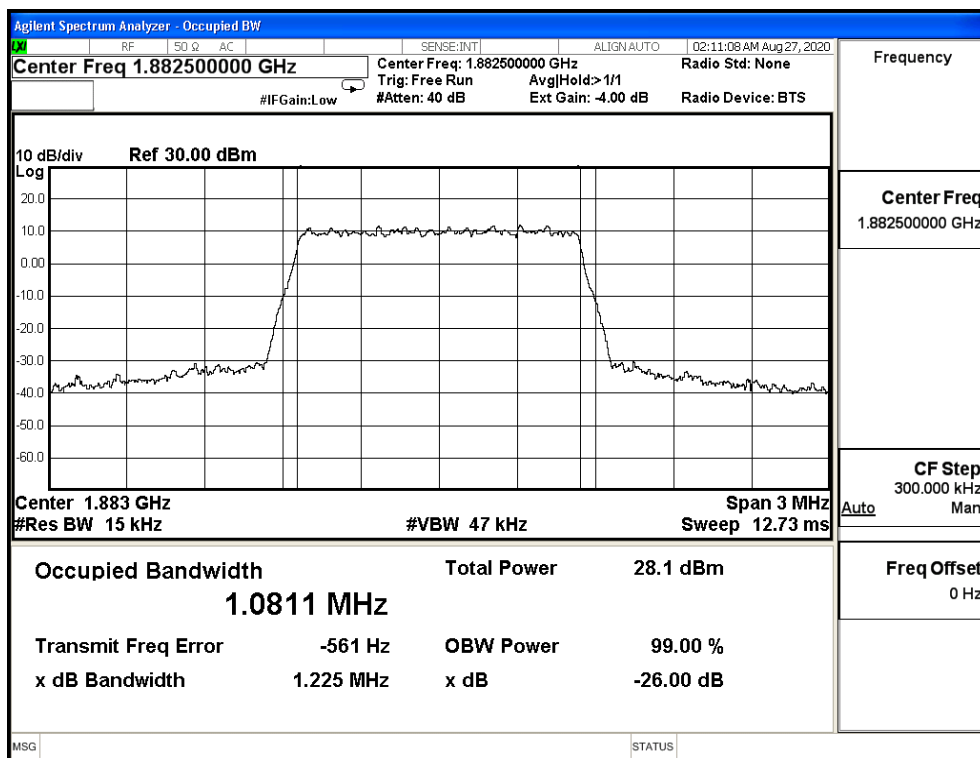


16QAM_CH26683_ 1.4M

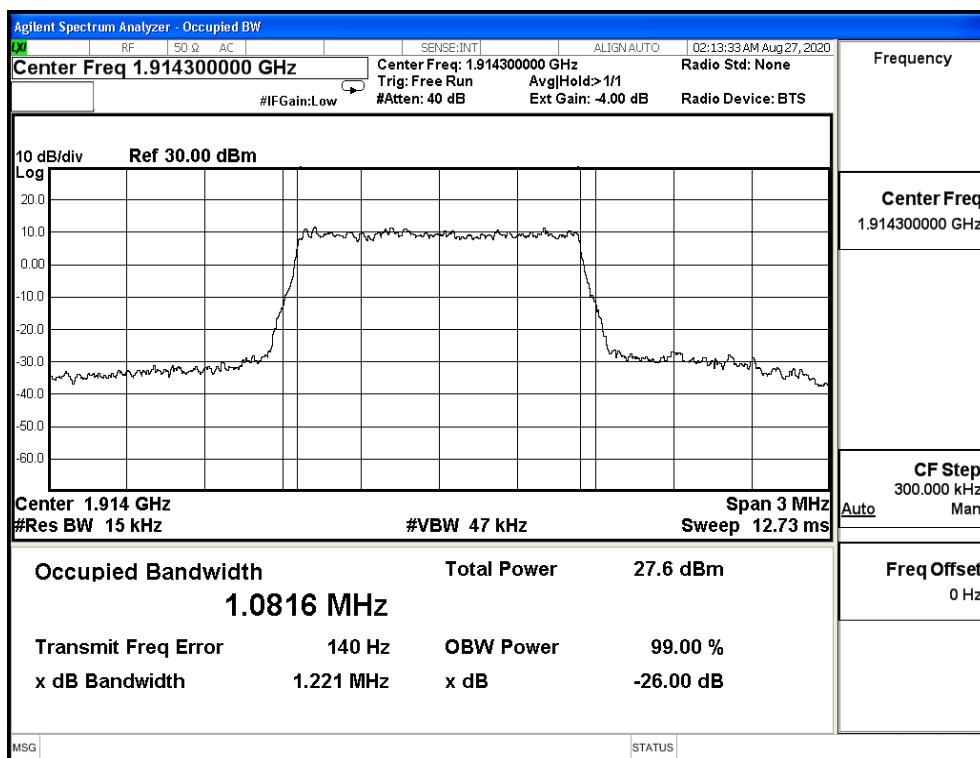


64QAM CH26047 1.4M

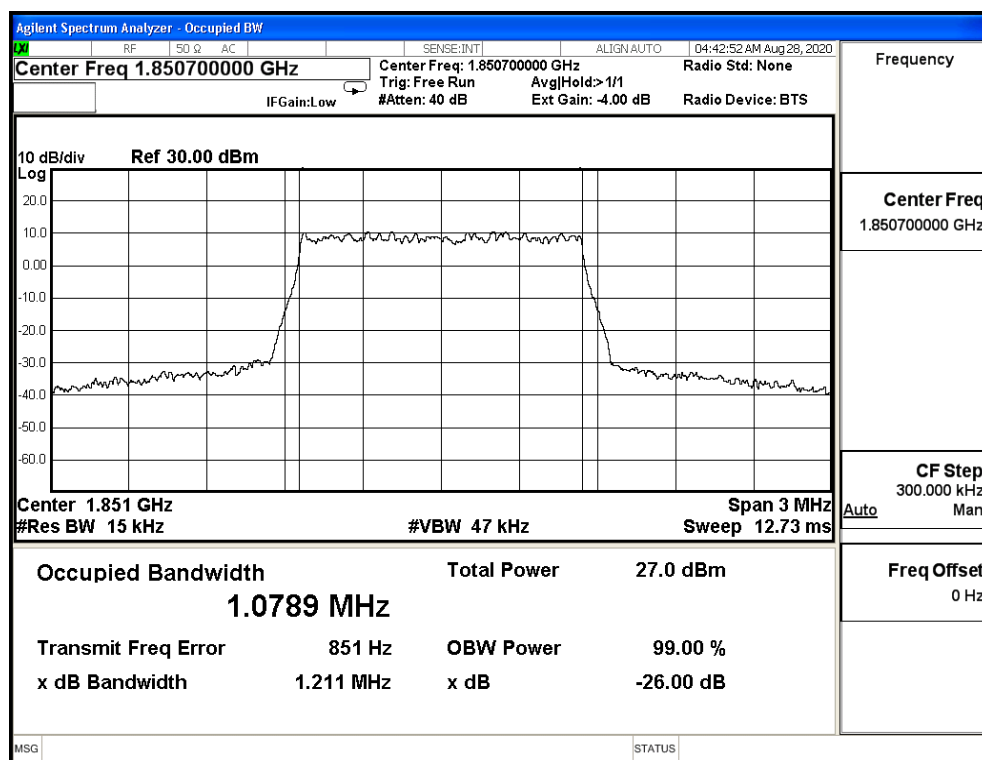


64QAM CH26365 1.4M

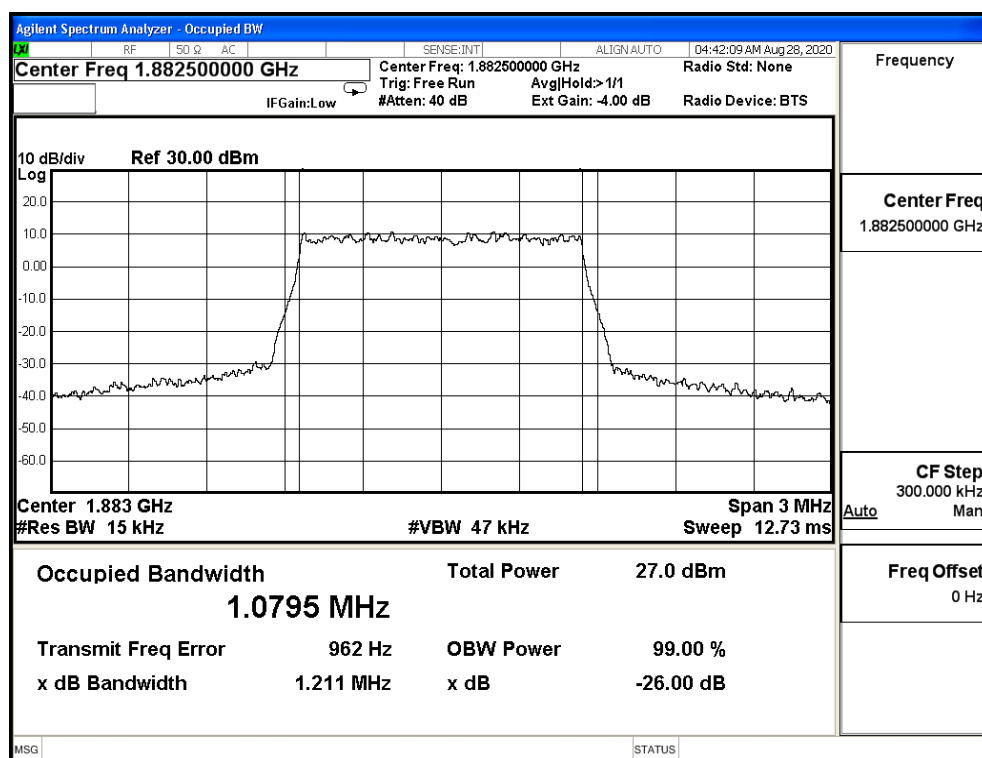


64QAM_CH26683_1.4M

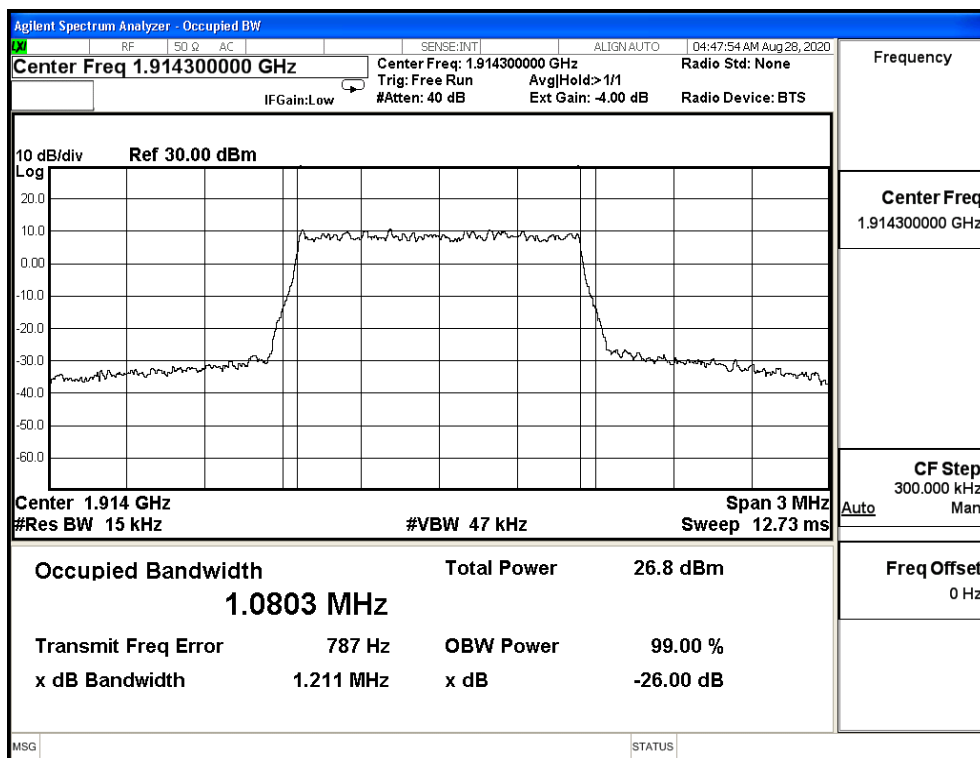


QPSK_CH26055_3M

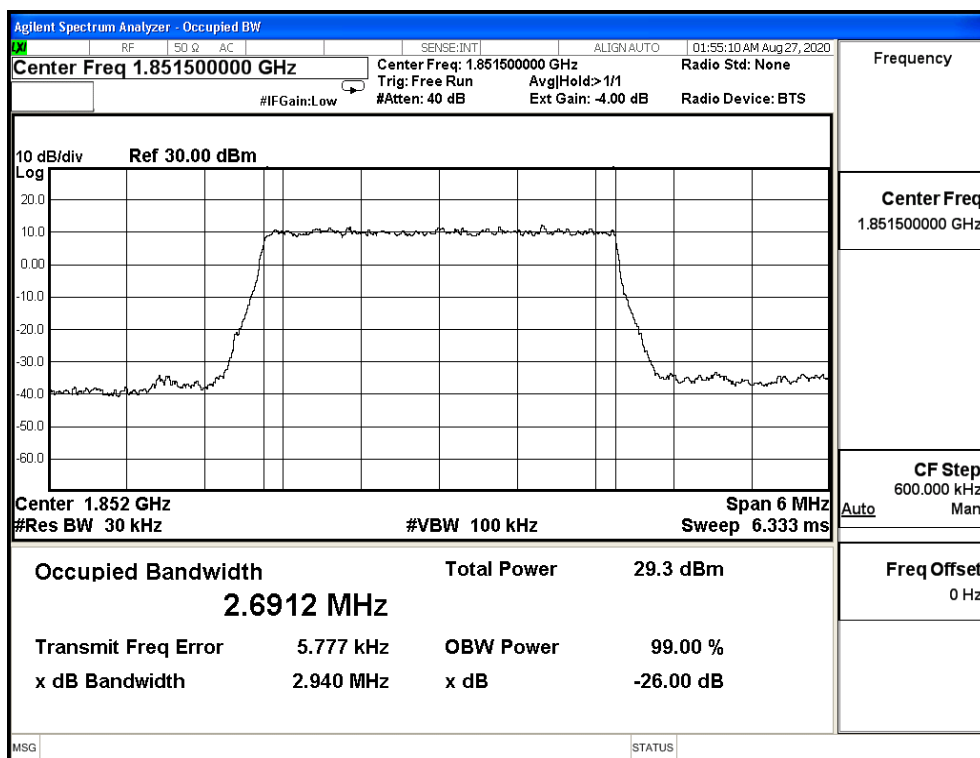


QPSK_CH26365_3M

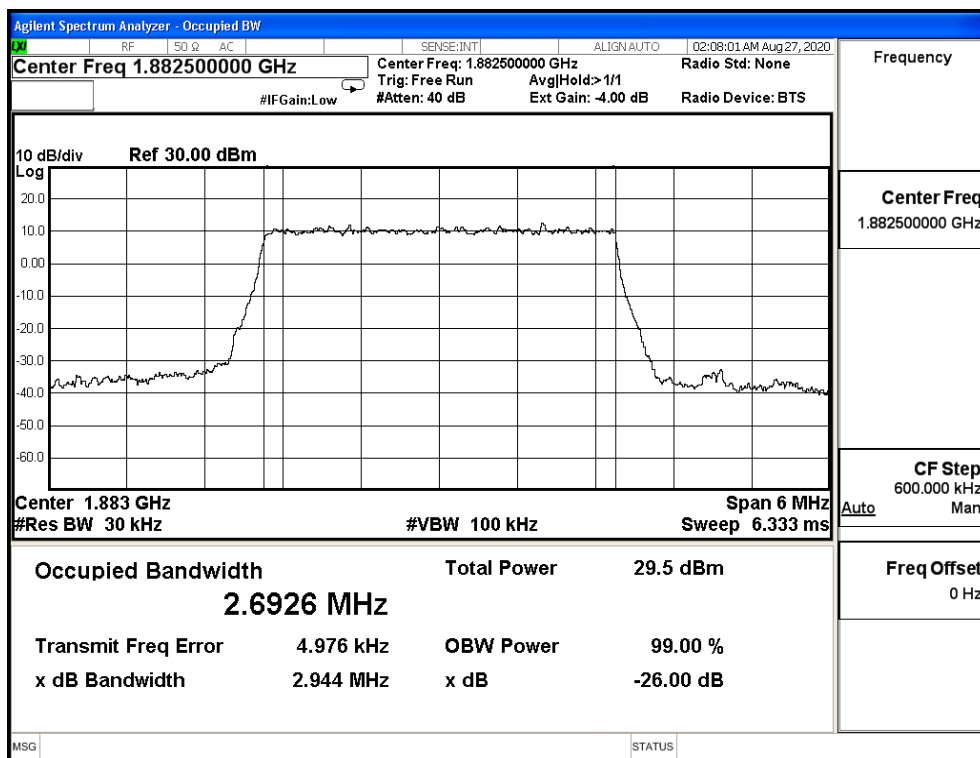


QPSK_CH26675_3M

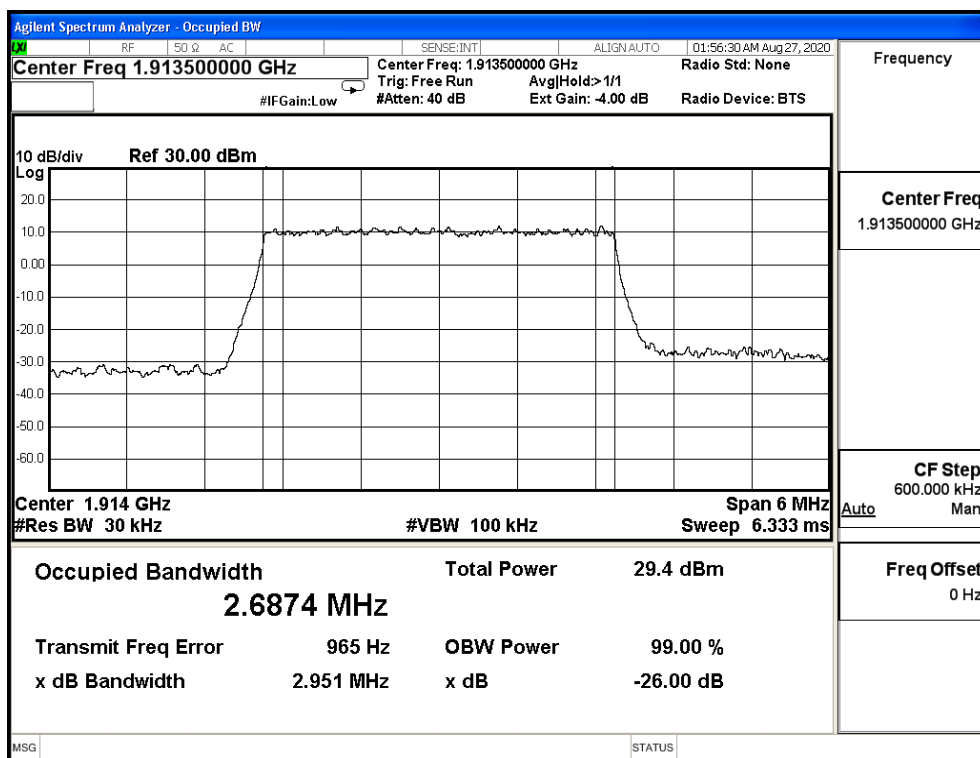


16QAM_CH26055_3M

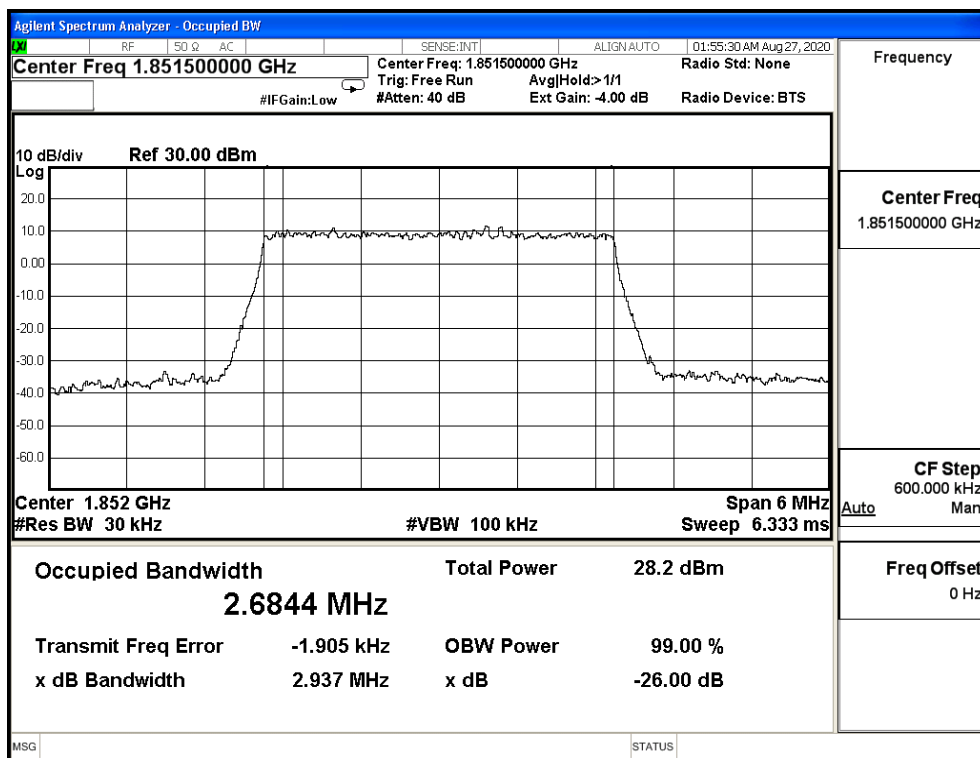


16QAM_CH26365_3M

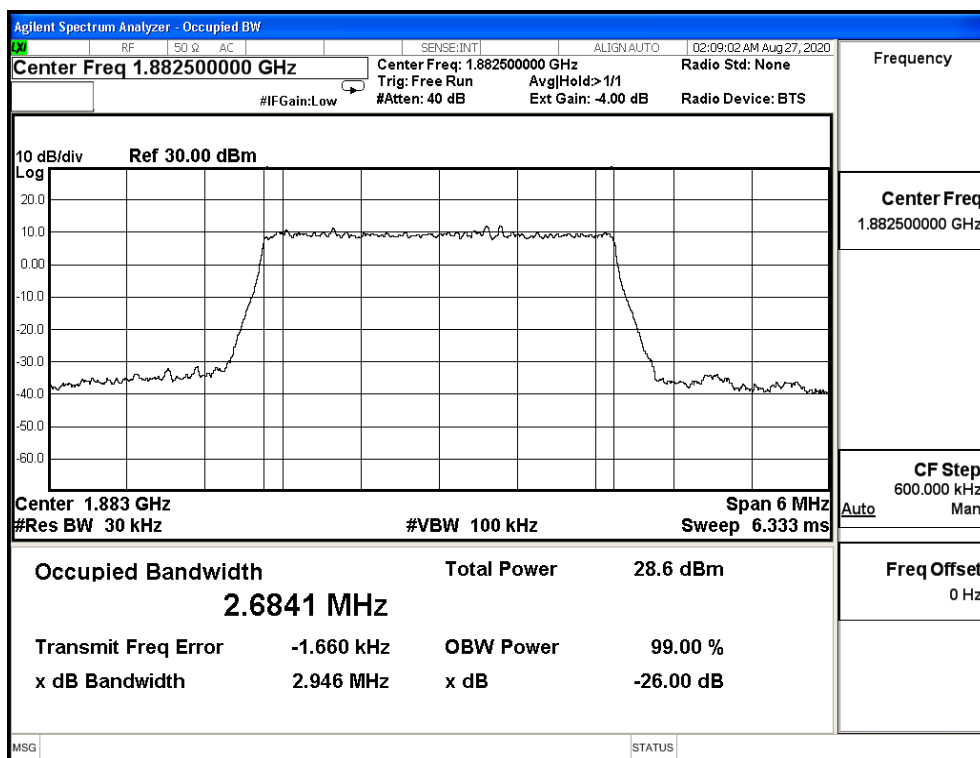


16QAM_CH26675_3M

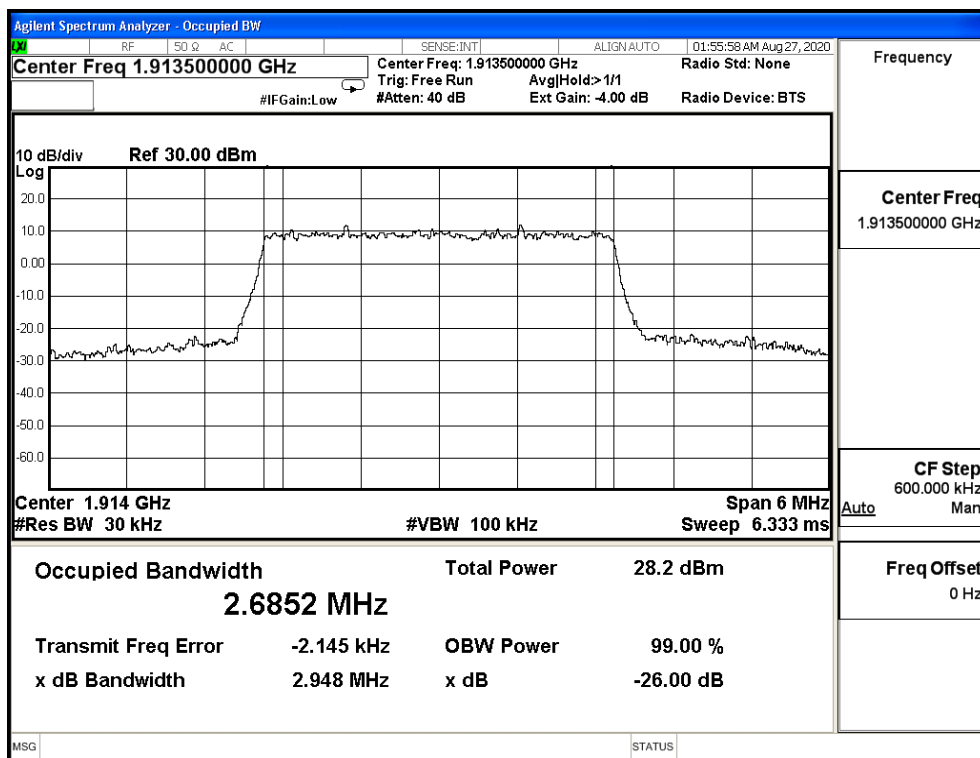


64QAM_CH26055_3M

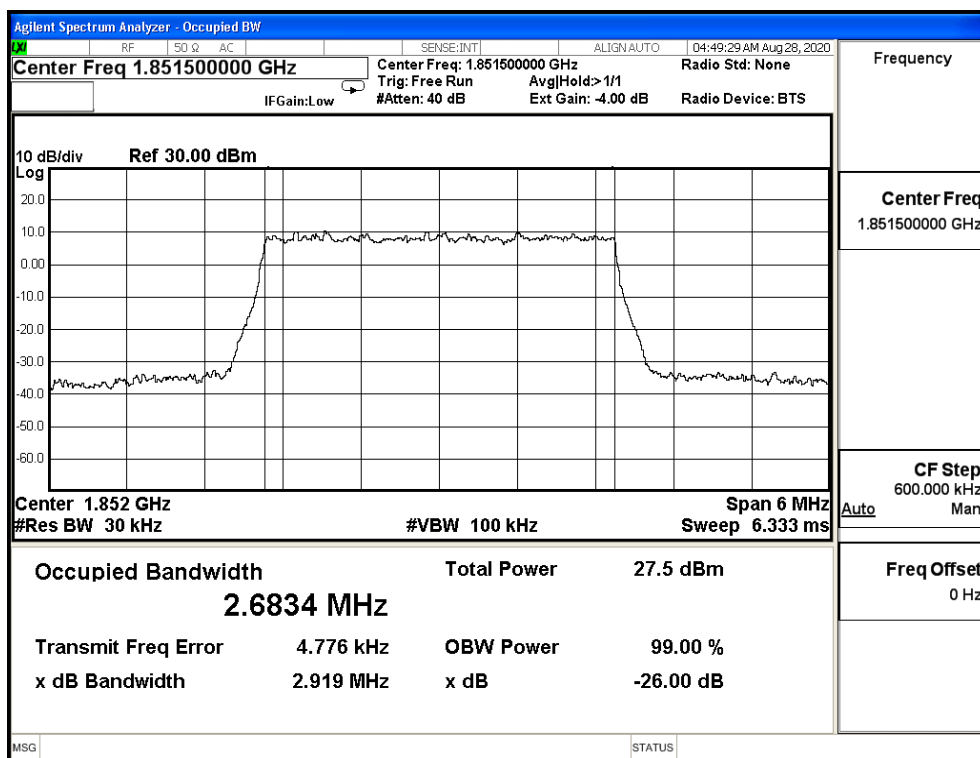


64QAM_CH26365_3M

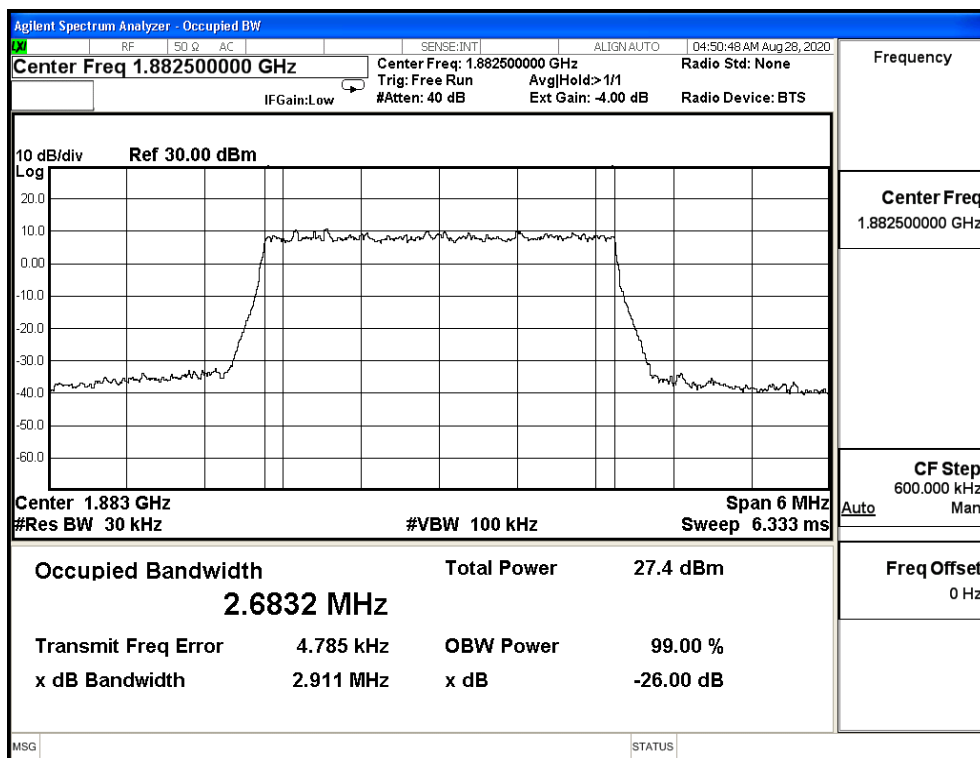


64QAM_CH26675_3M

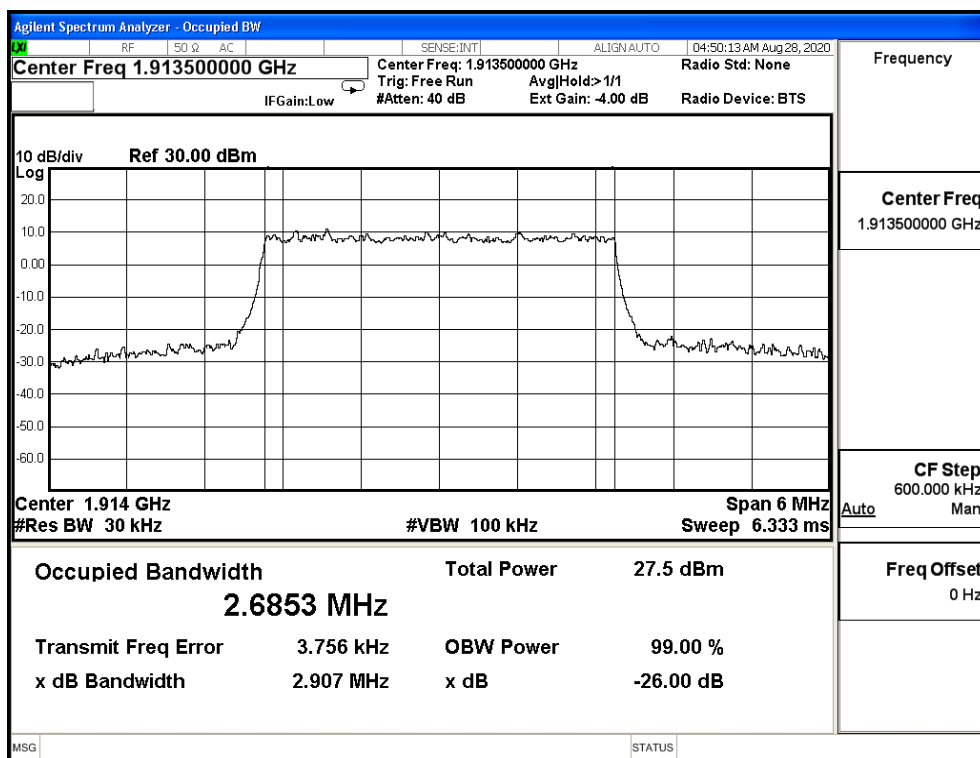


QPSK_CH26065_5M

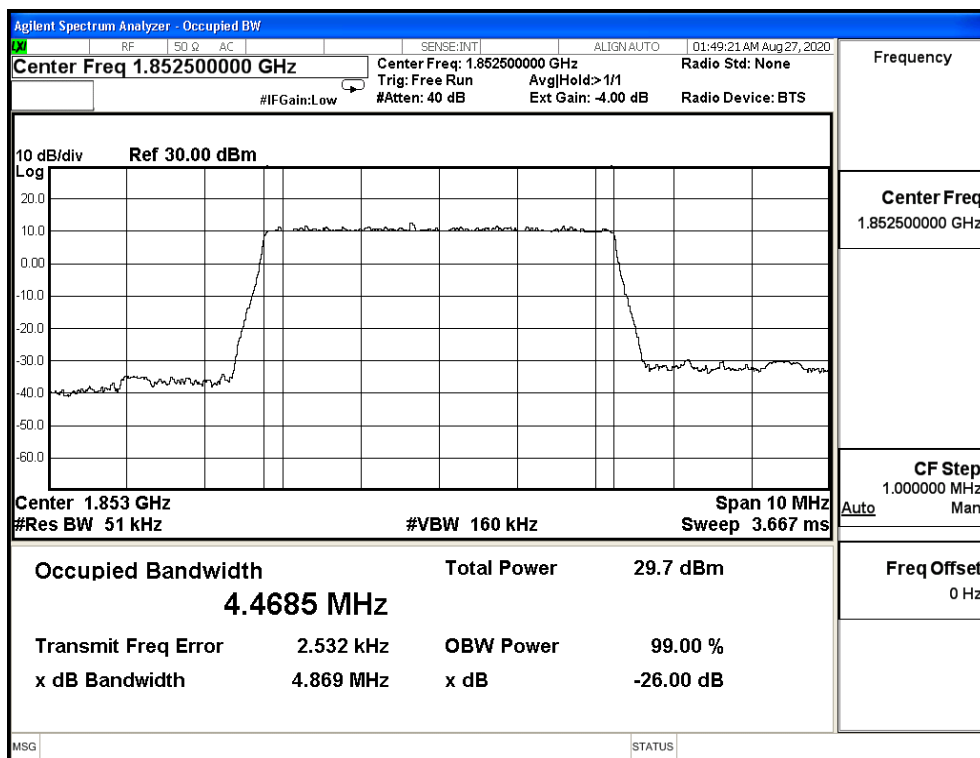


QPSK_CH26365_5M

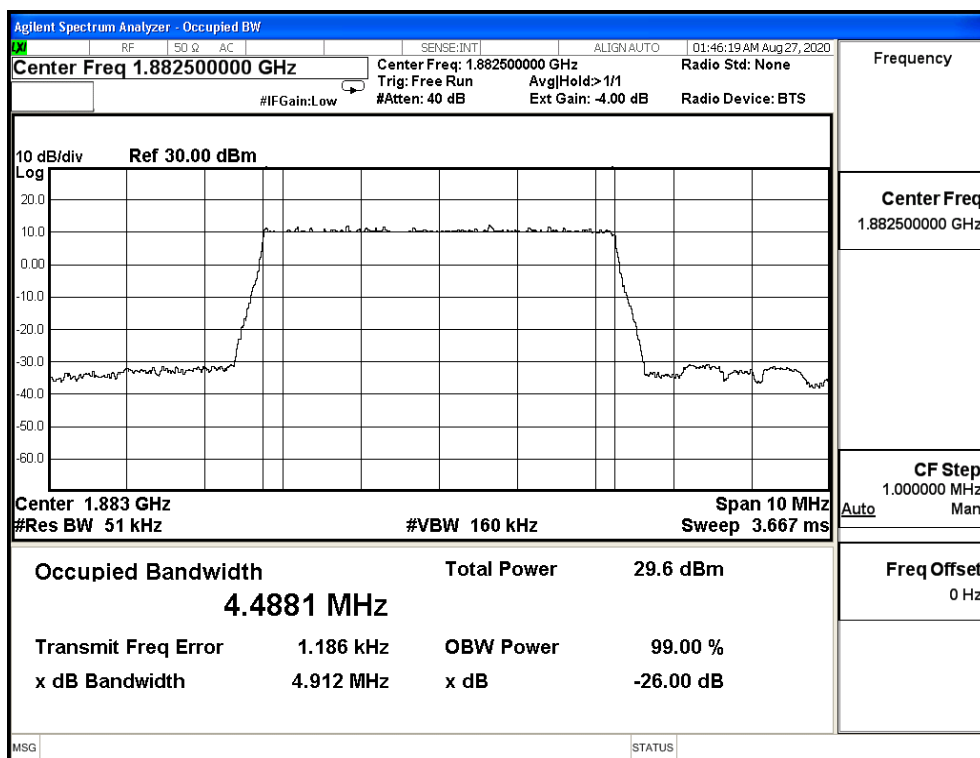


QPSK_CH26665_5M

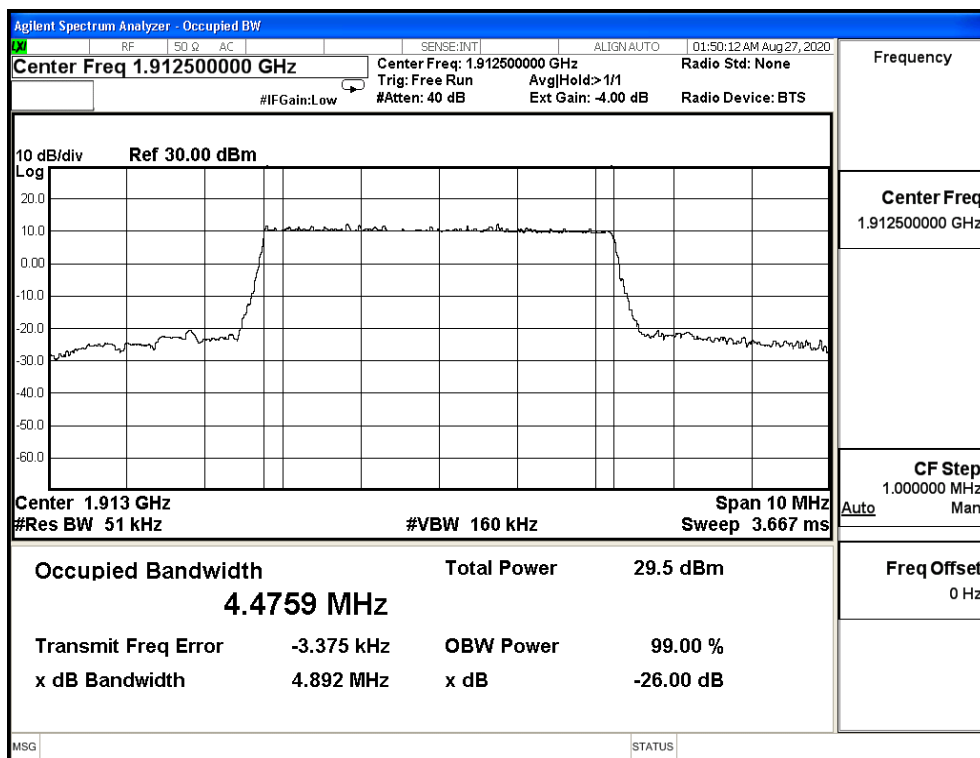


16QAM_CH26065_5M

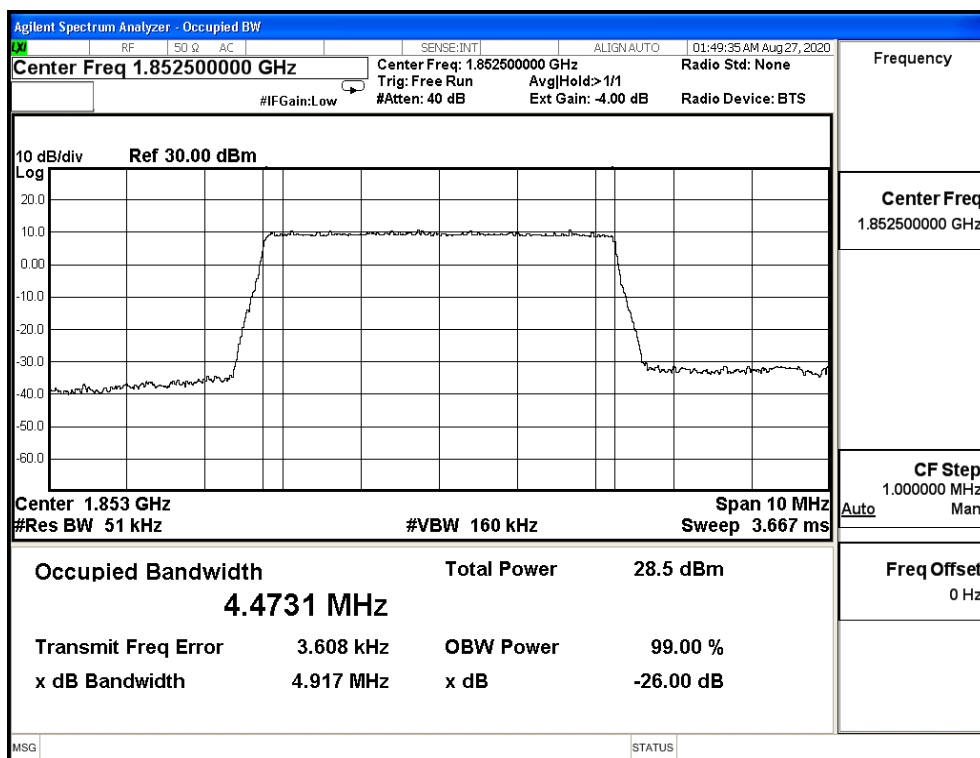


16QAM_CH26365_5M

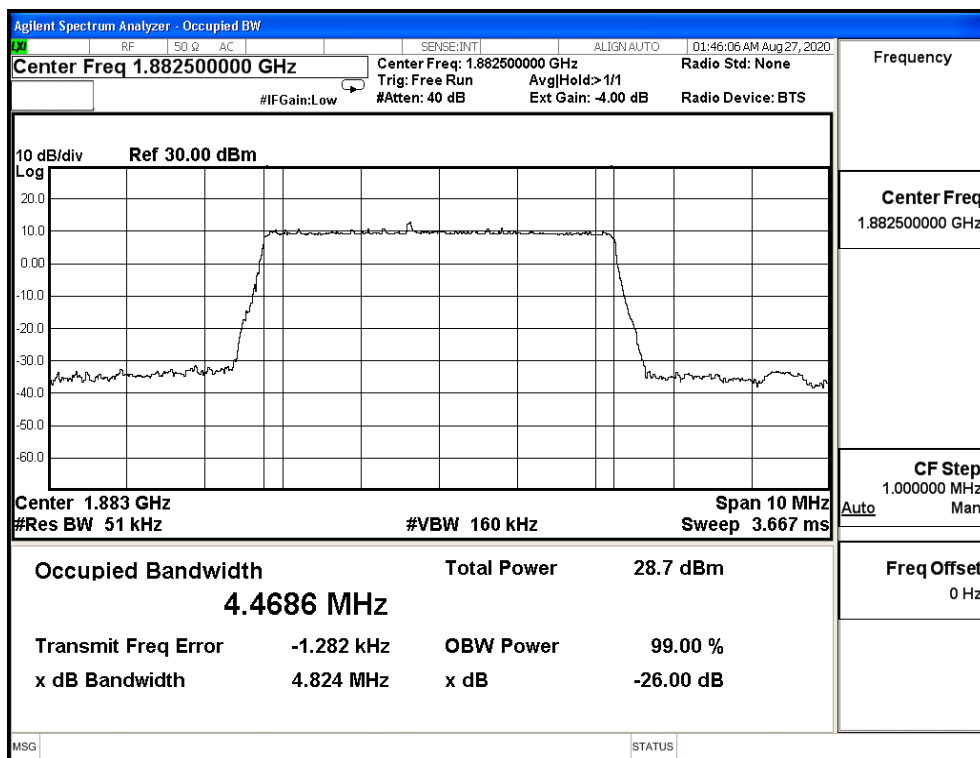


16QAM_CH26665_5M

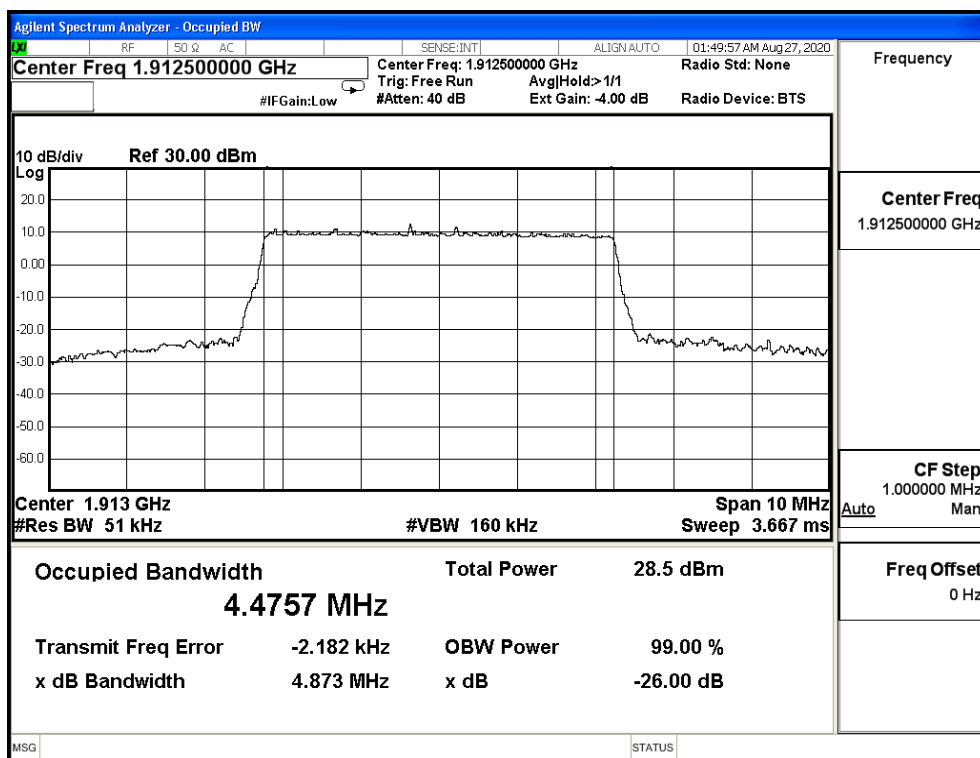


64QAM_CH26065_5M

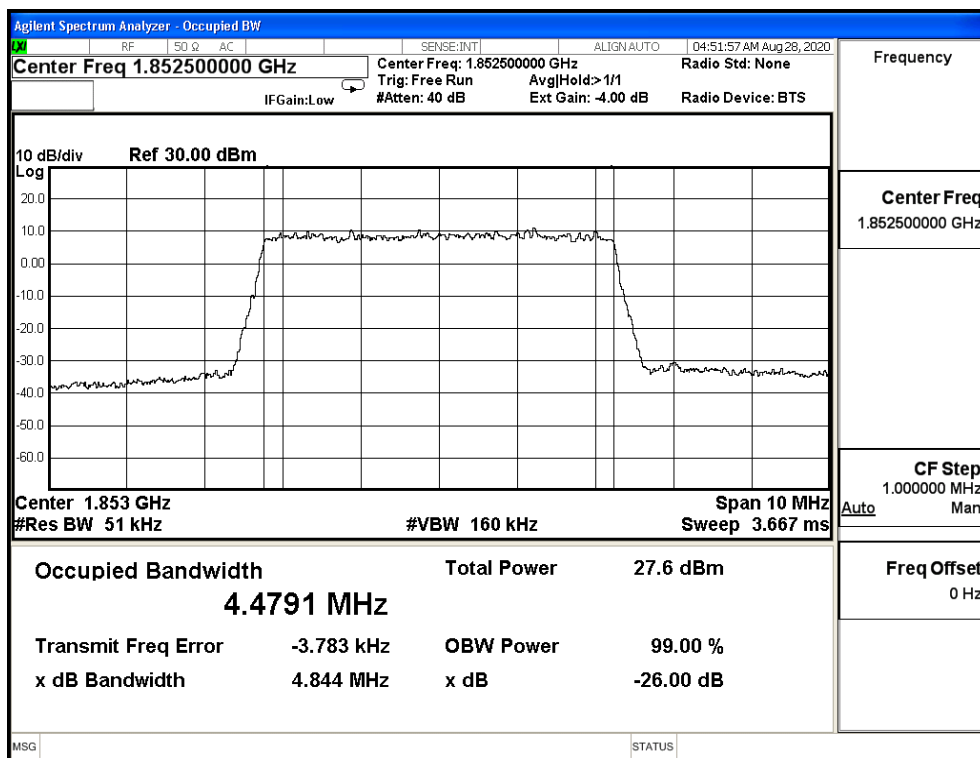


64QAM_CH26365_5M

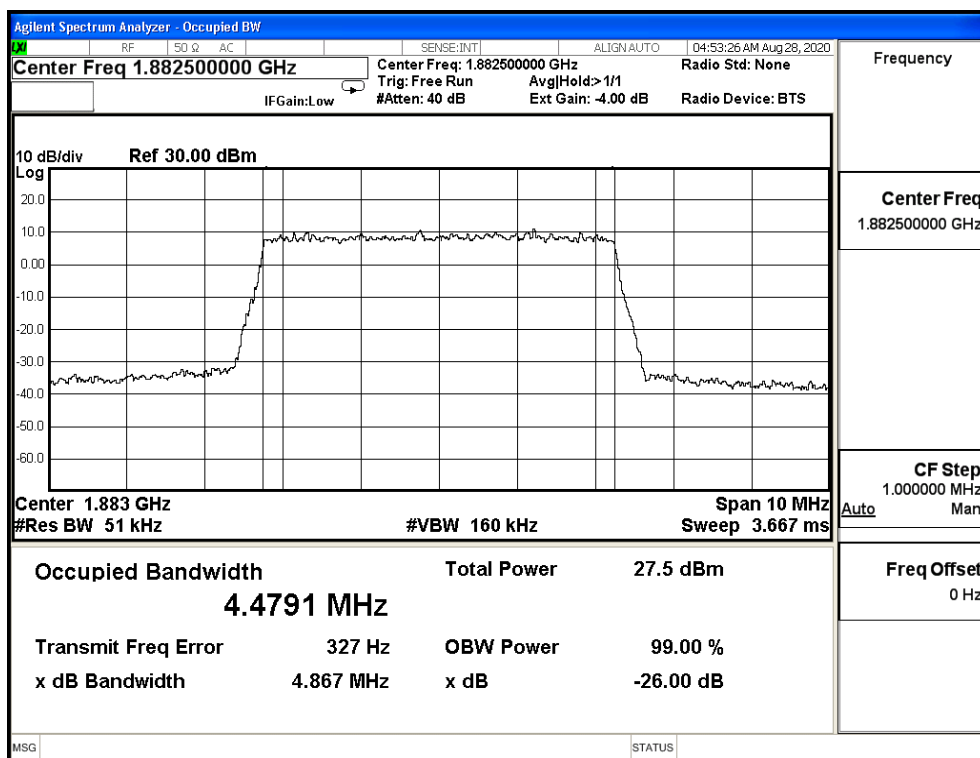


64QAM_CH26665_5M

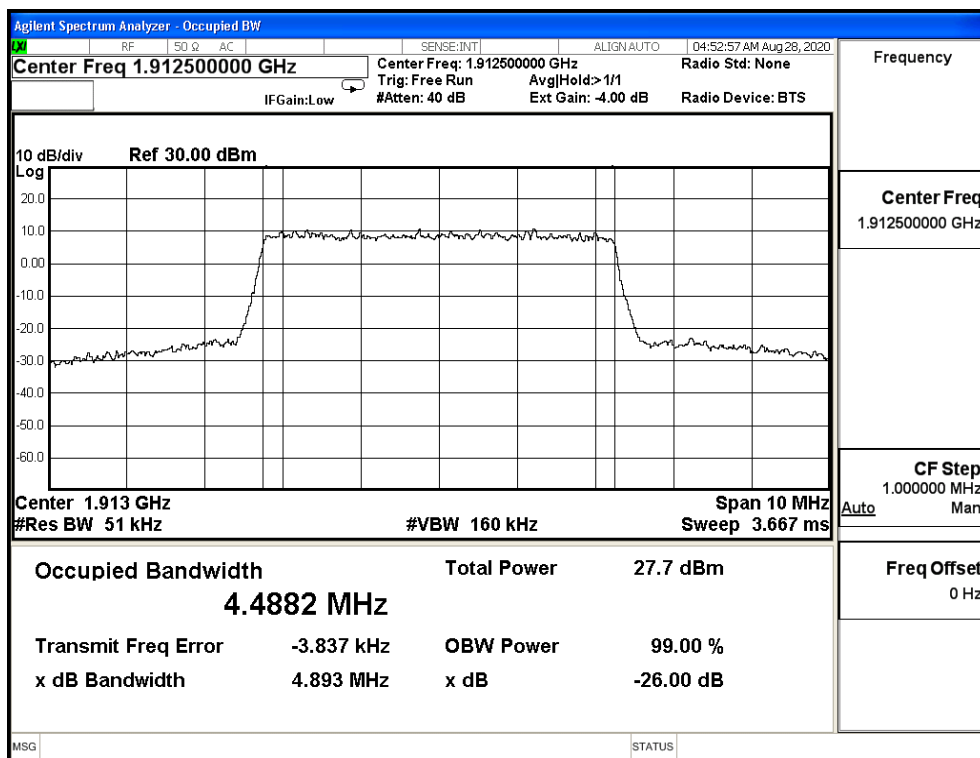


QPSK_CH26090_10M

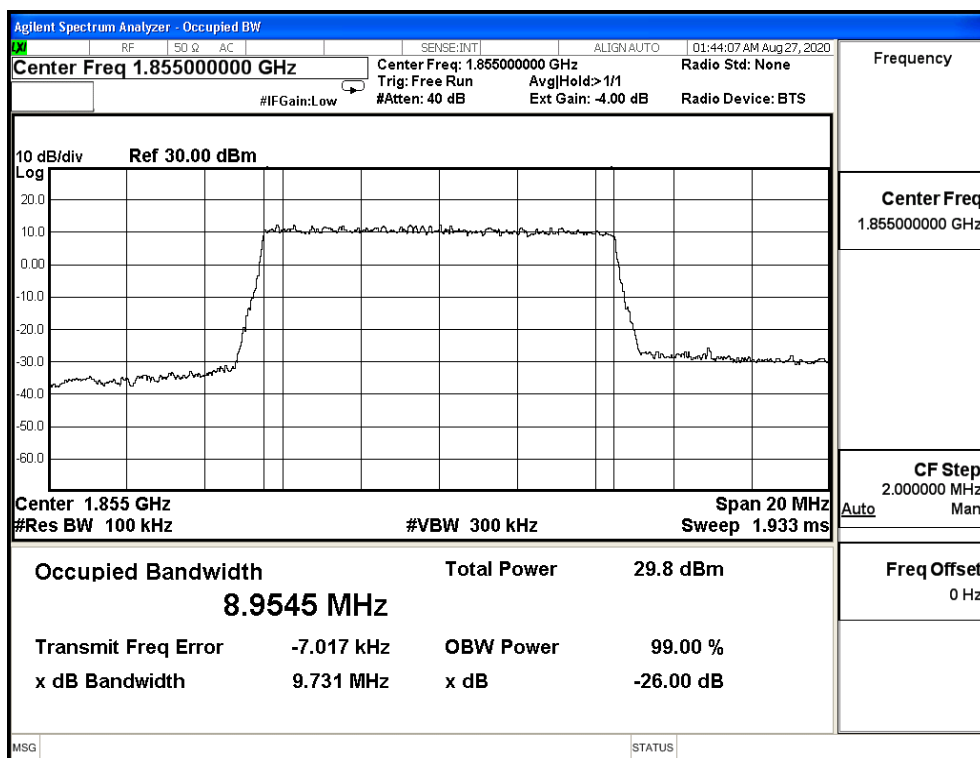


QPSK_CH26365_10M

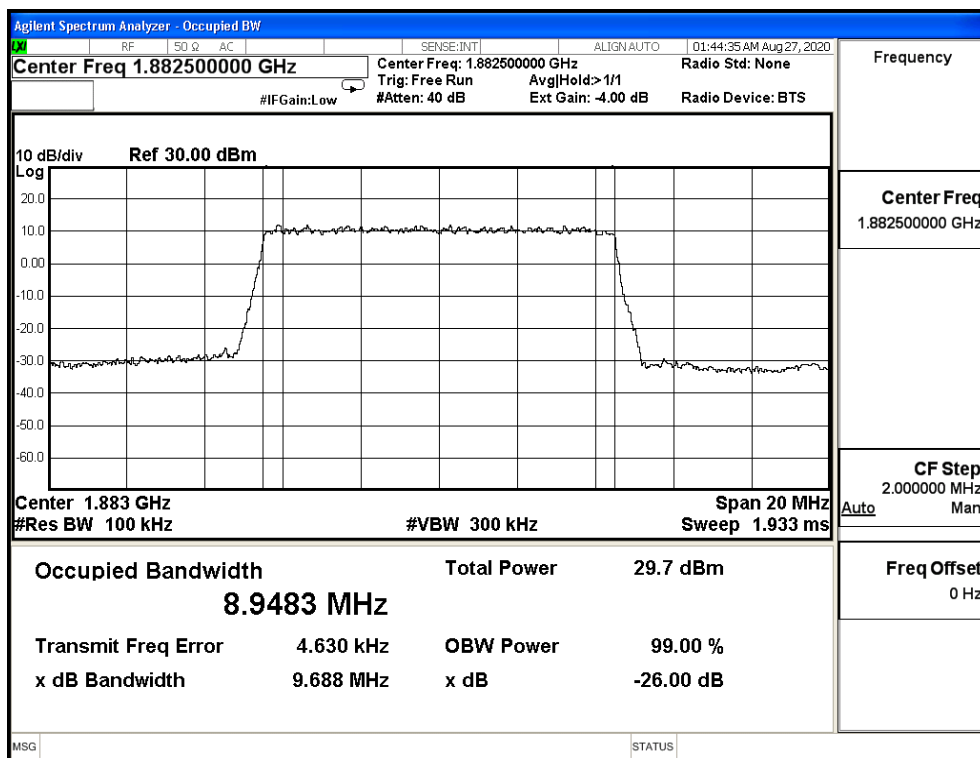


QPSK_CH26640_10M

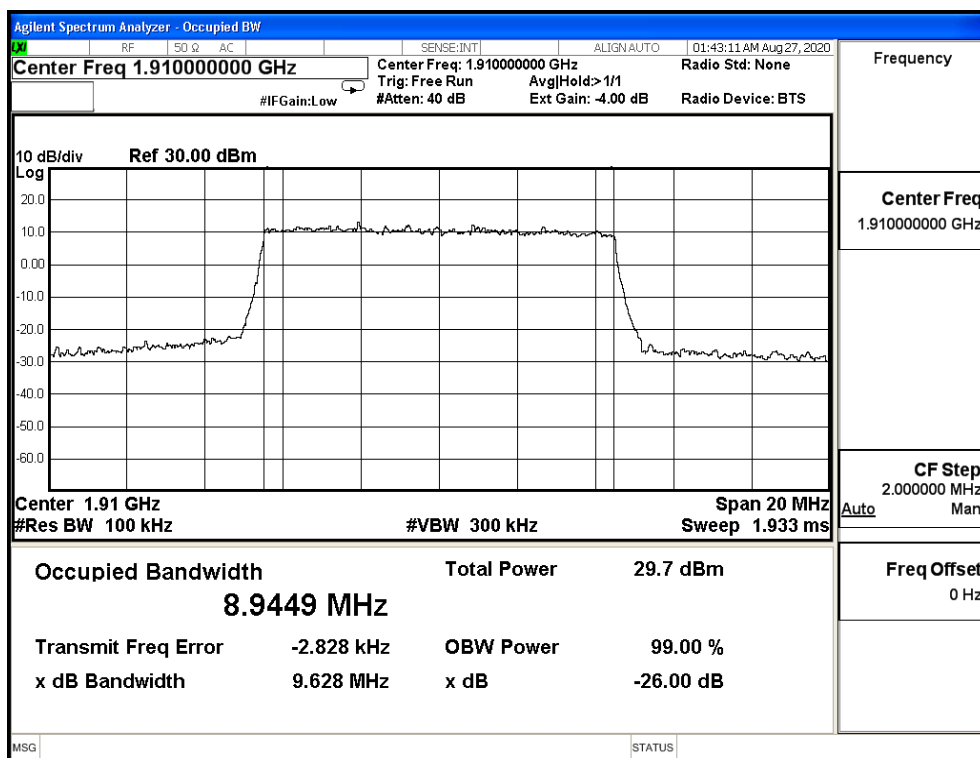


16QAM_CH26090_10M

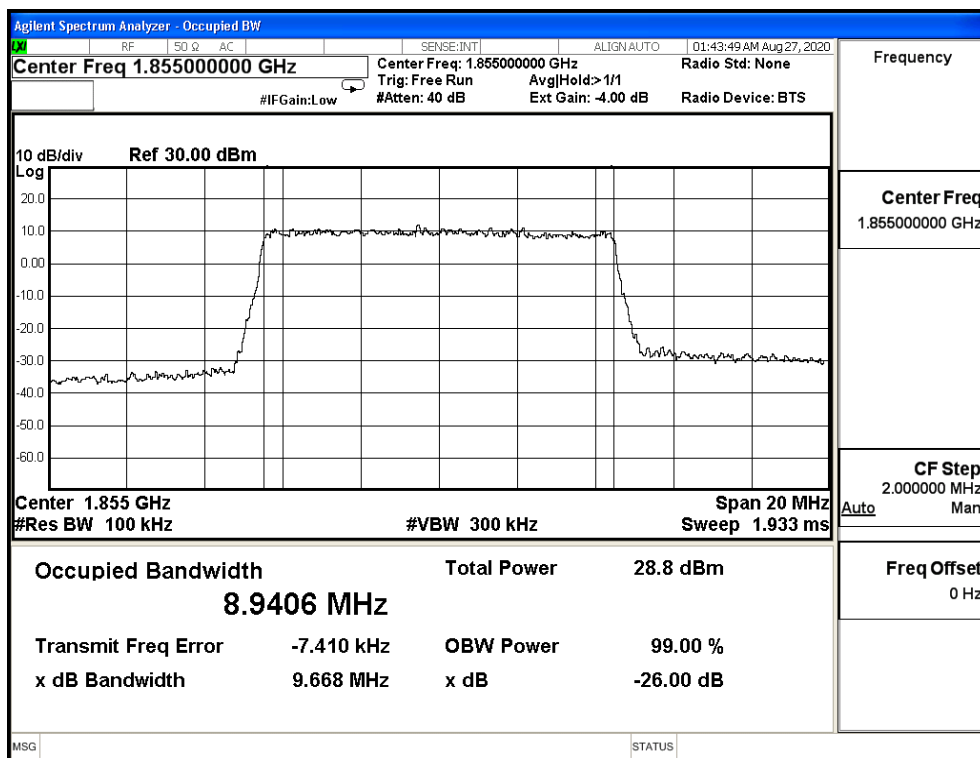


16QAM_CH26365_10M

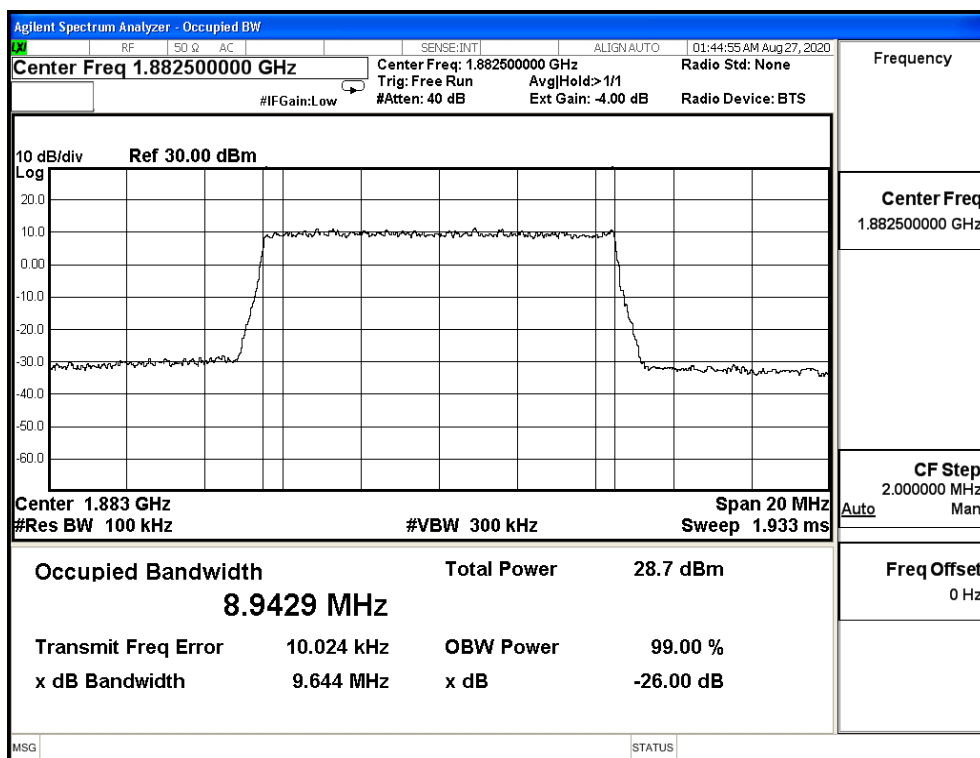


16QAM_CH26640_10M

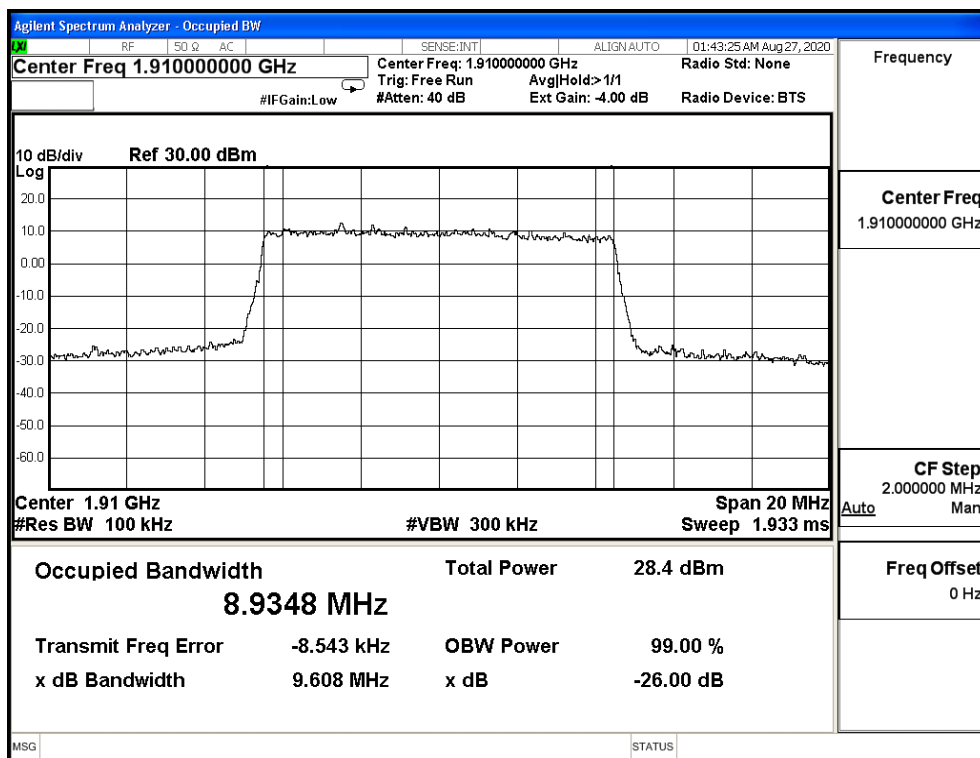


64QAM_CH26090_10M

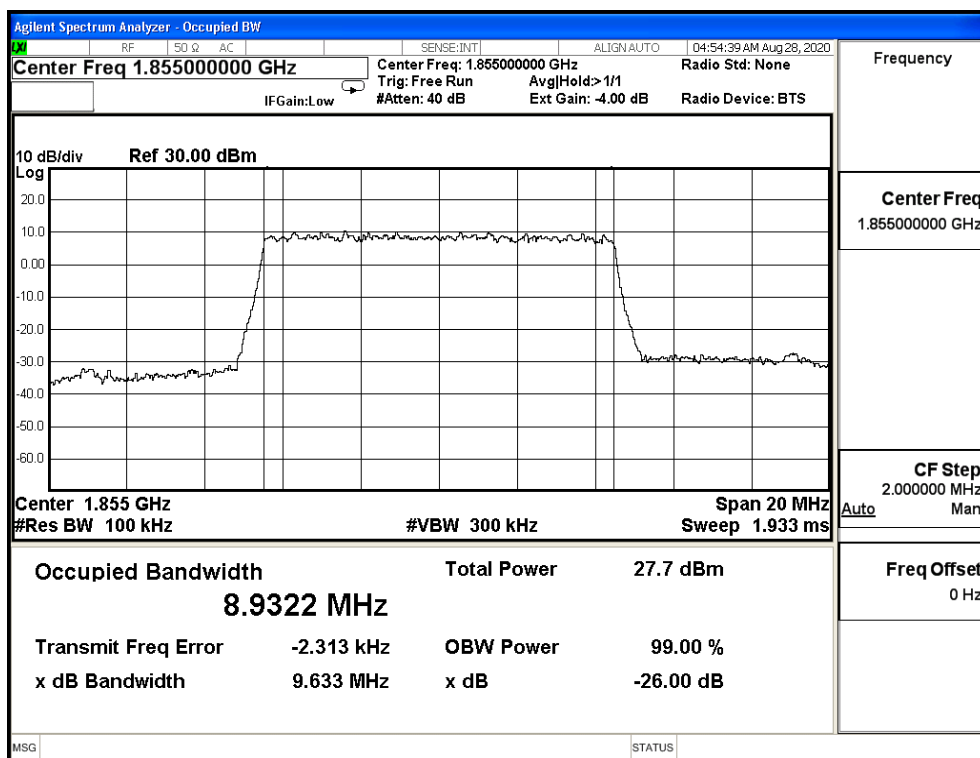


64QAM_CH26365_10M

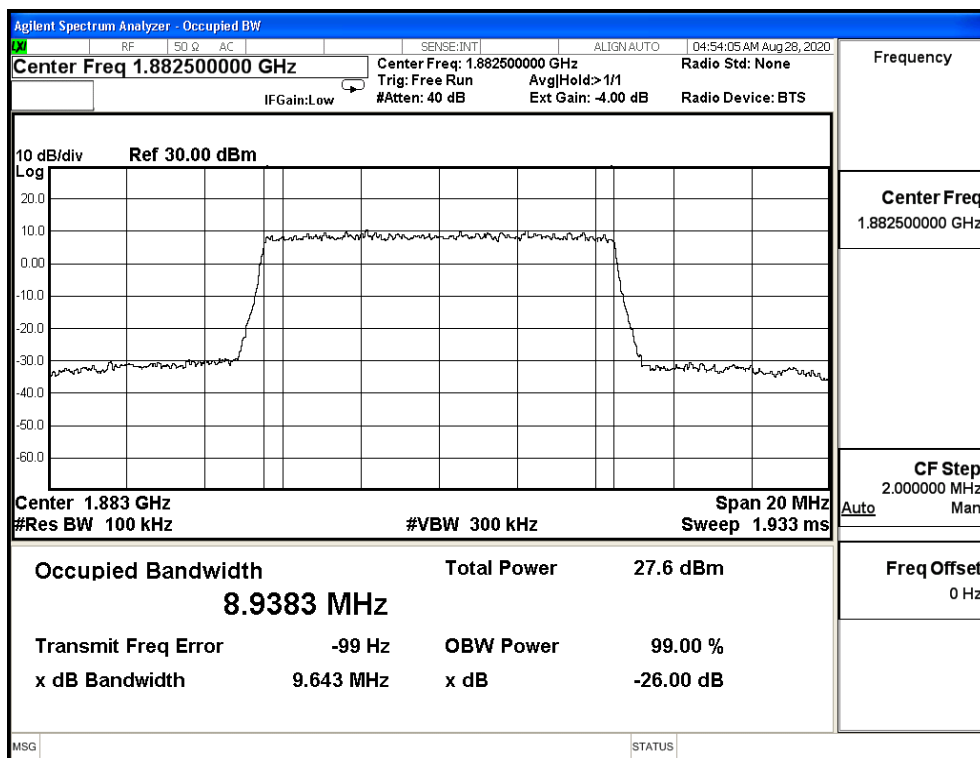


64QAM_CH26640_10M

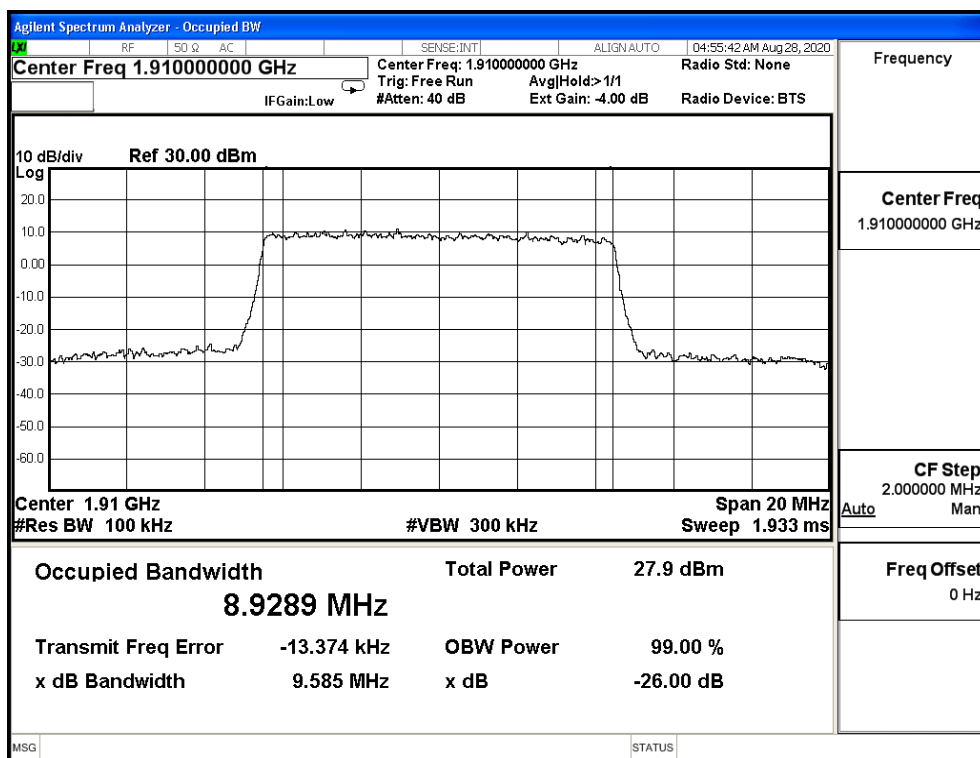


QPSK_CH26115_15M

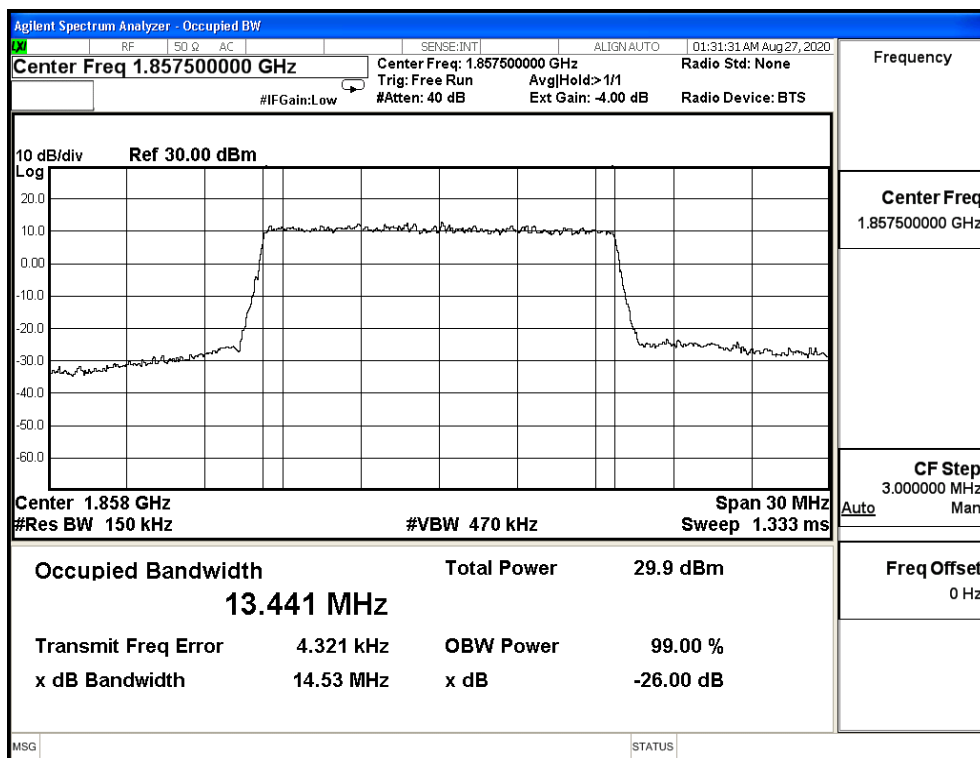


QPSK_CH26365_15M

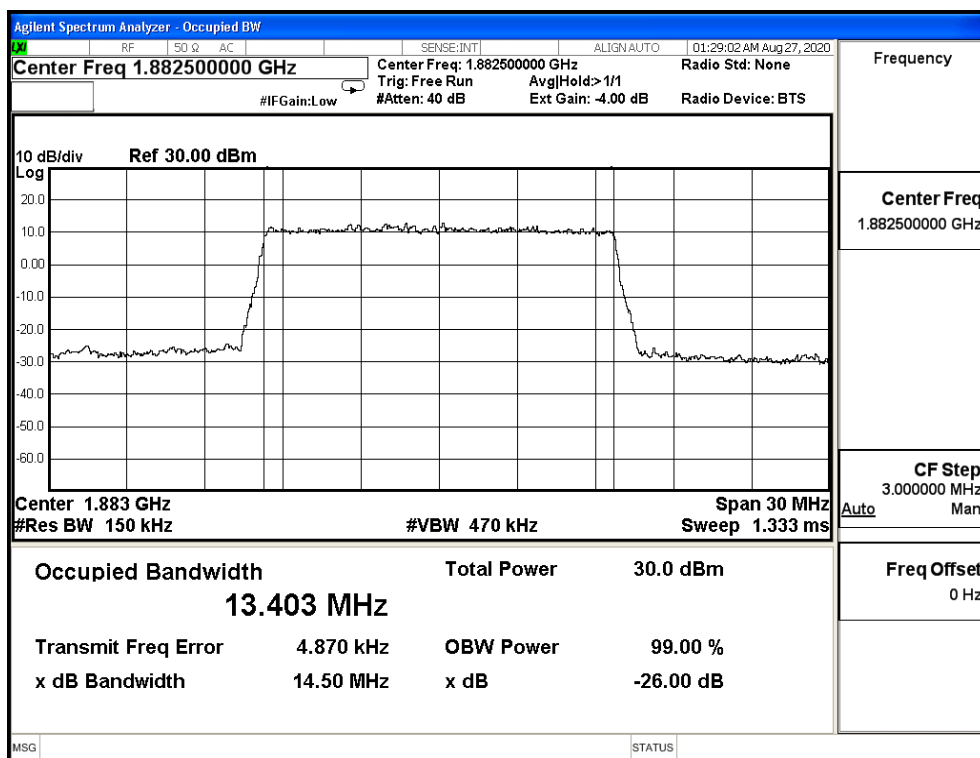


QPSK_CH26615_15M

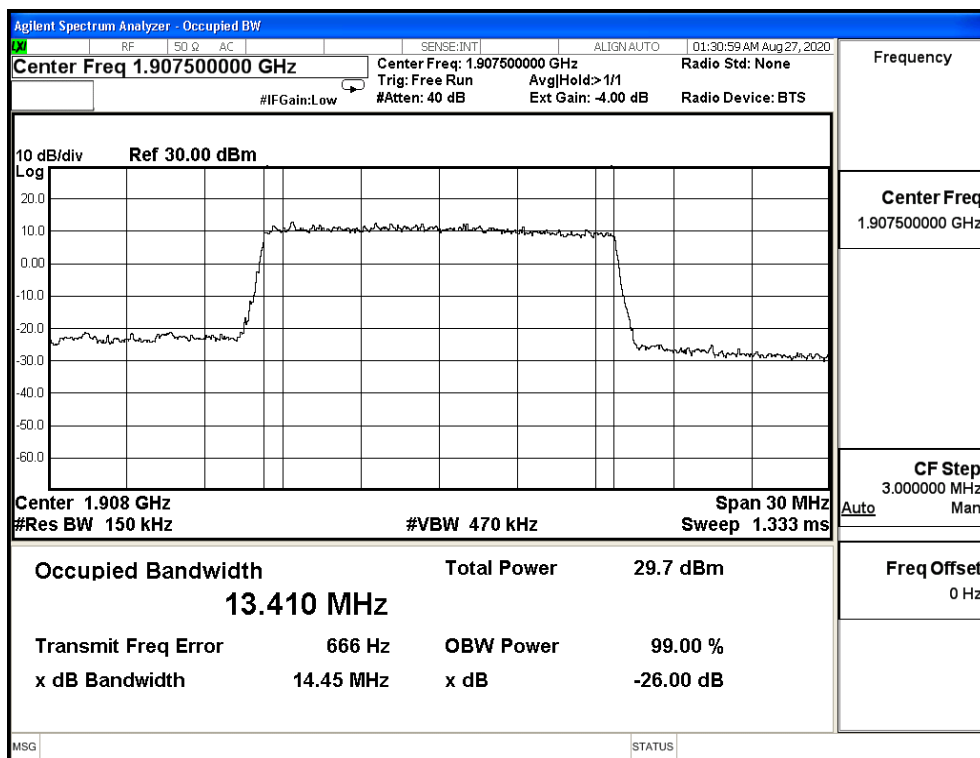


16QAM_CH26115_15M

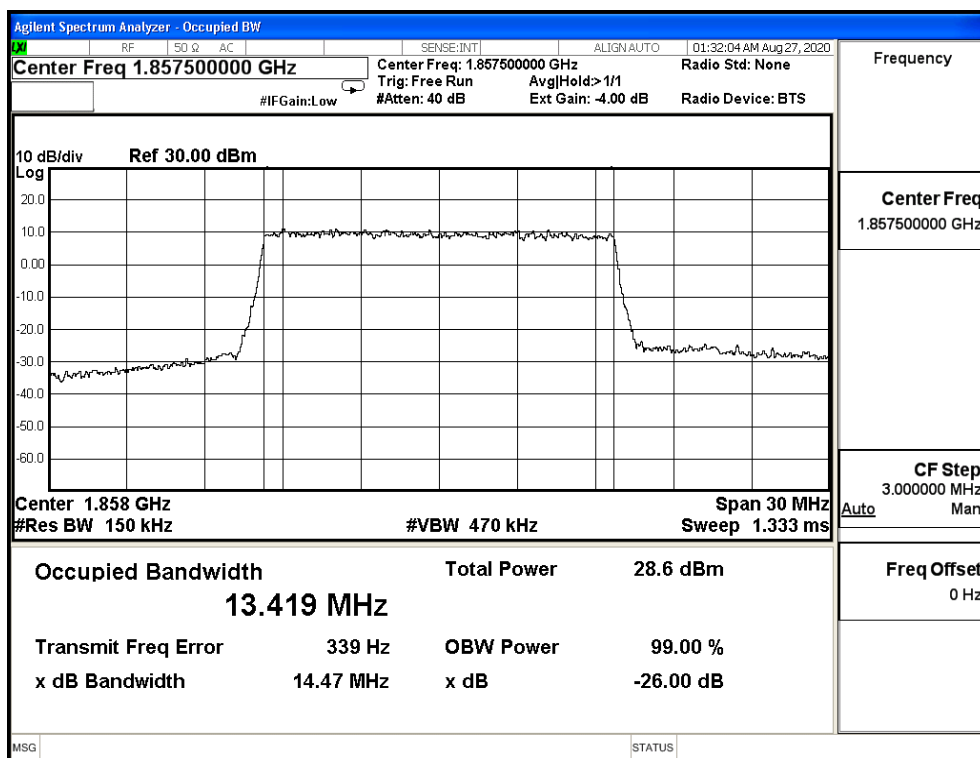


16QAM_CH26365_15M

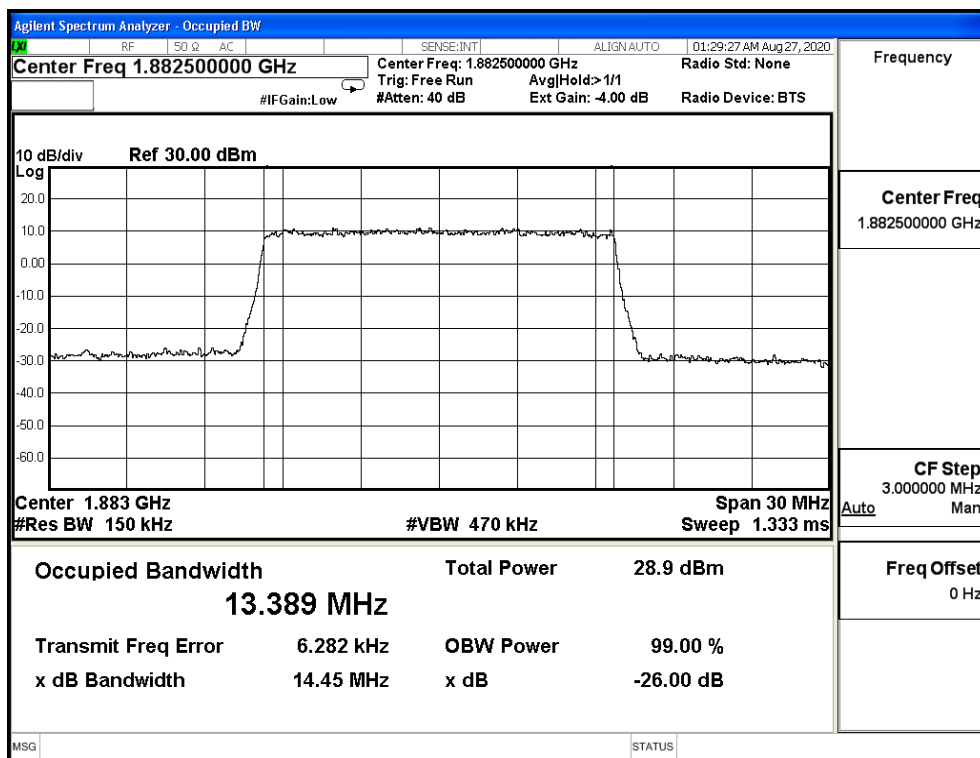


16QAM_CH26615_15M

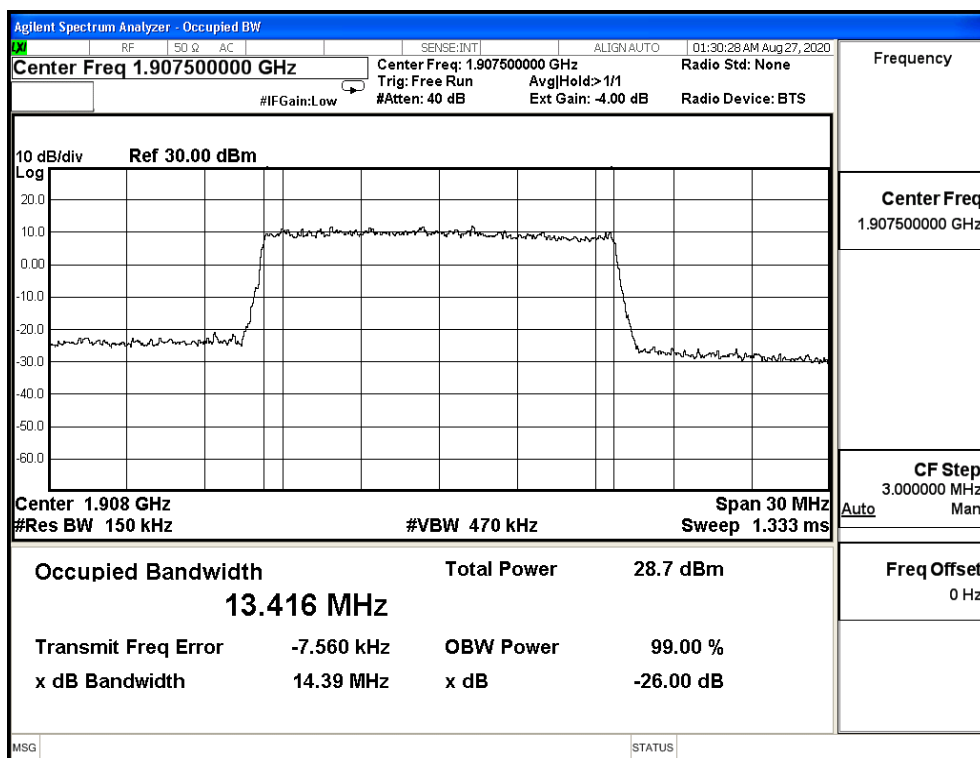


64QAM_CH26115_15M

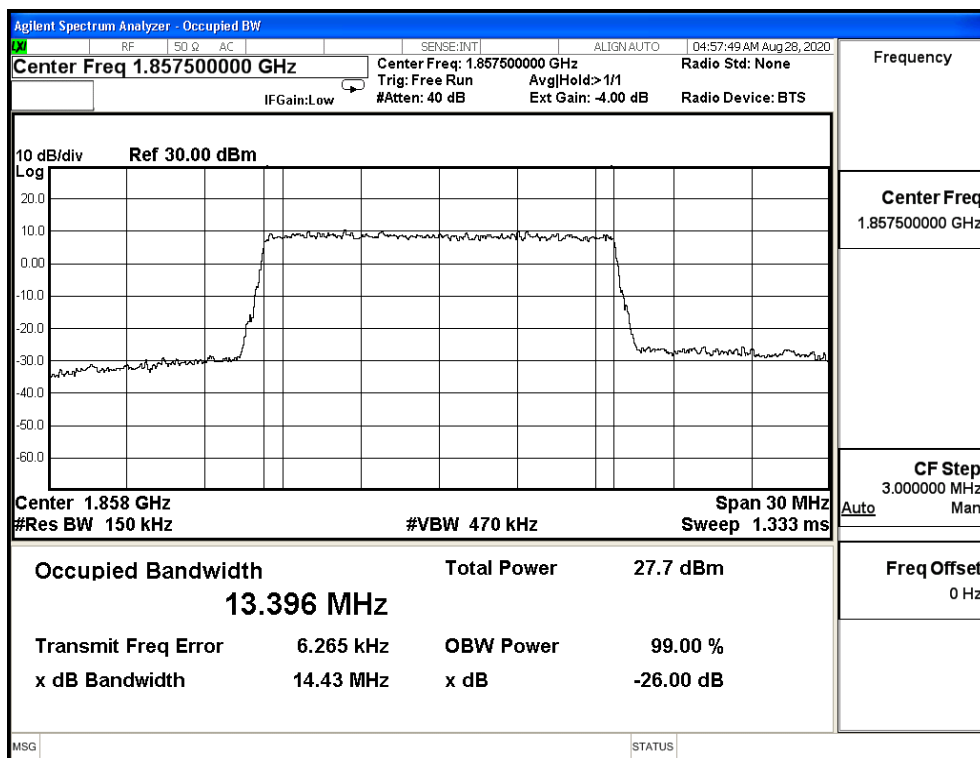


64QAM_CH26365_15M

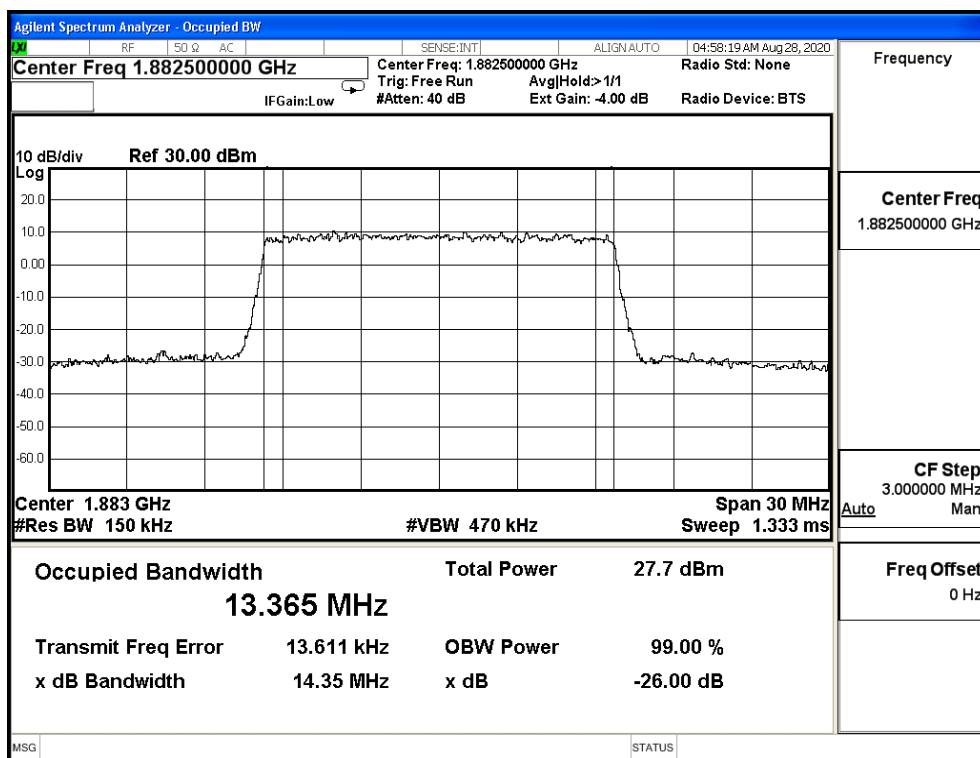


64QAM_CH26615_15M

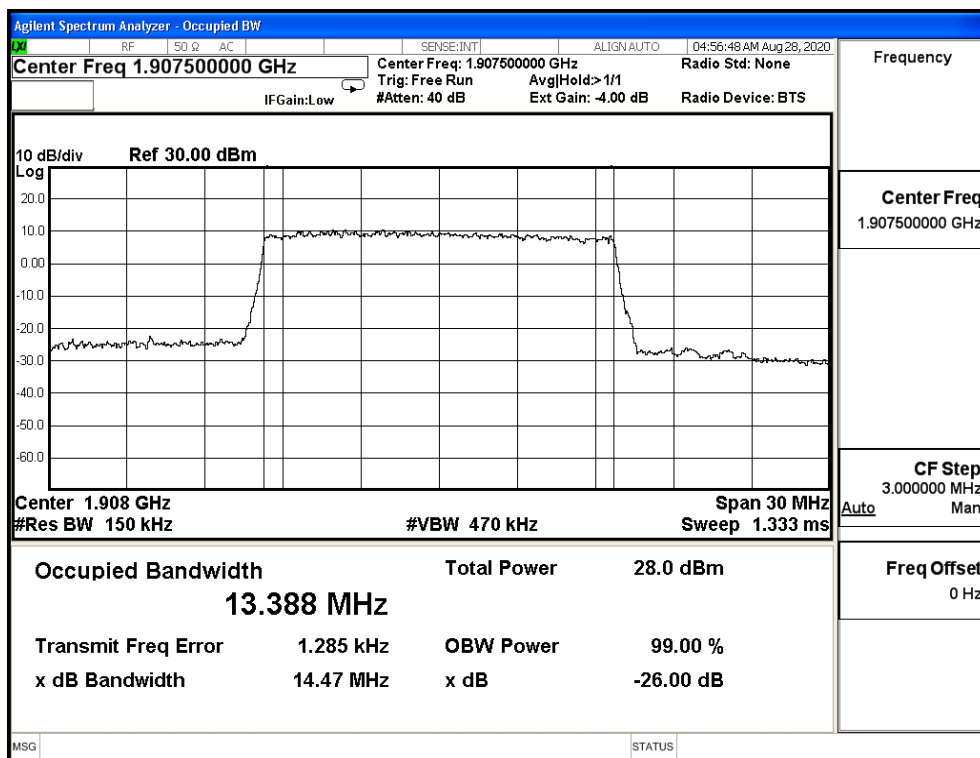


QPSK_CH26140_20M

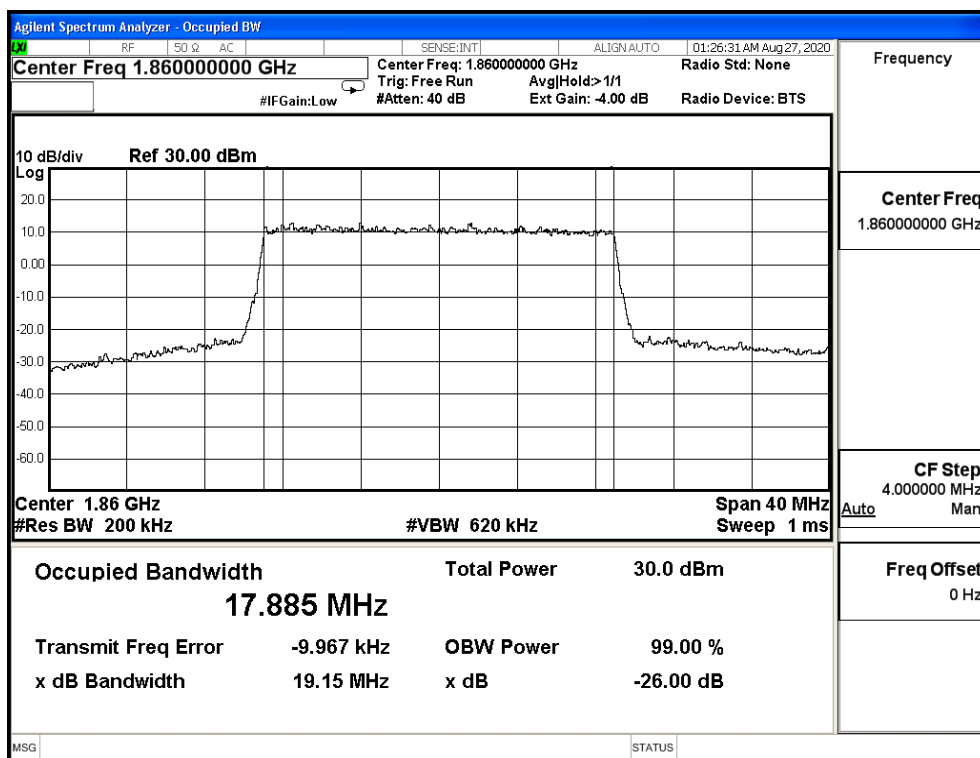


QPSK_CH26365_20M

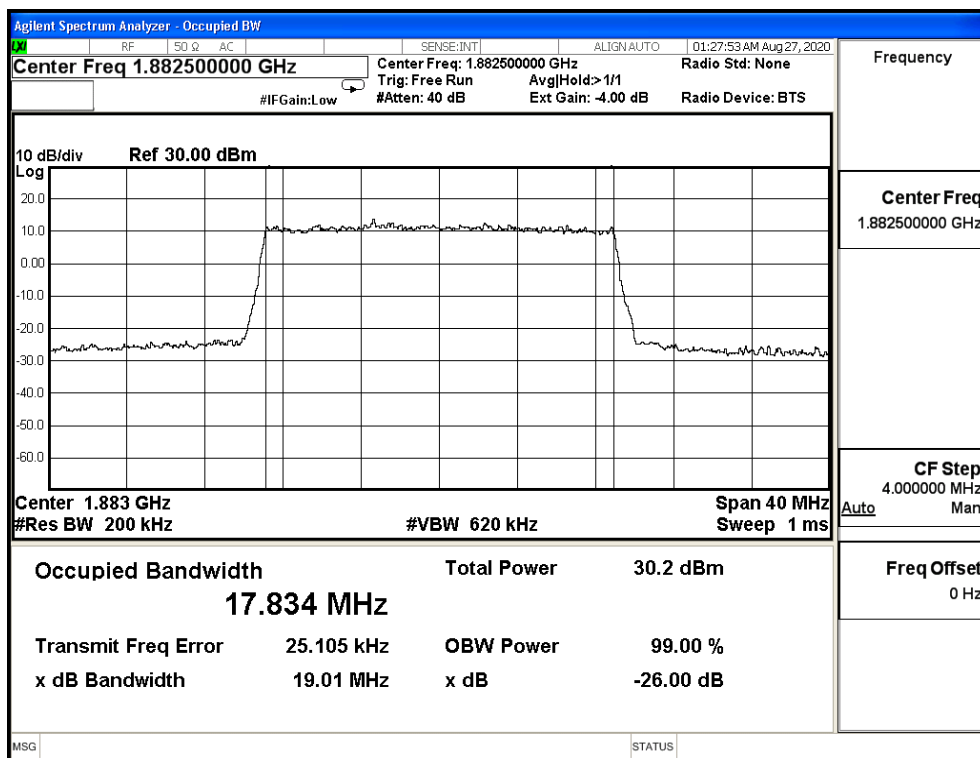


QPSK_CH26590_20M

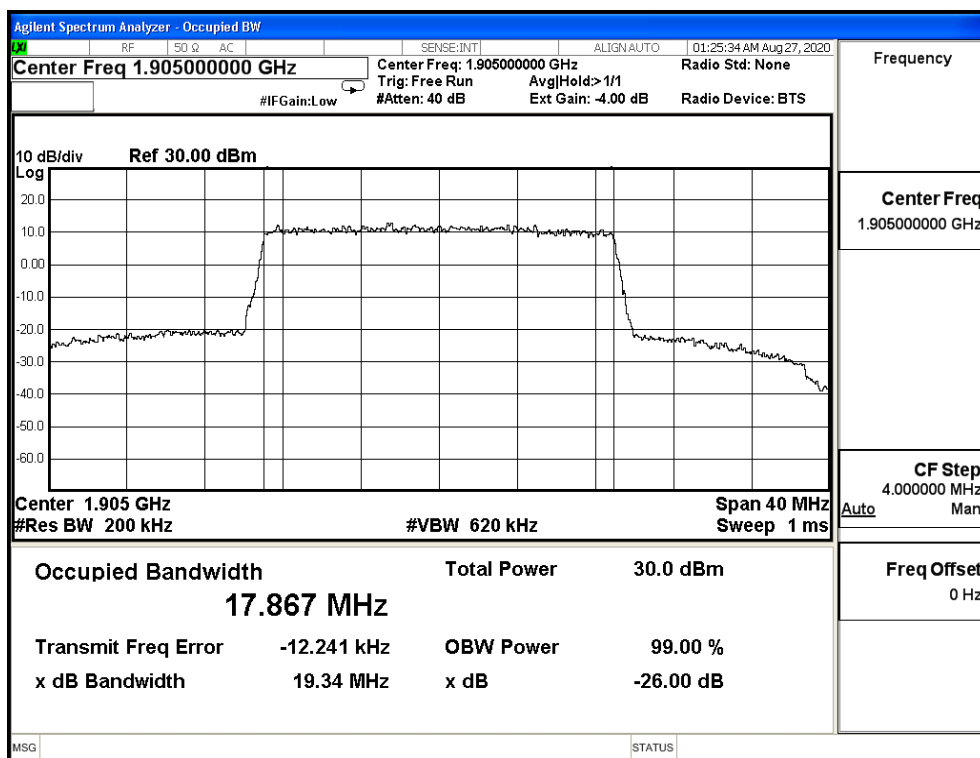


16QAM_CH26140_20M

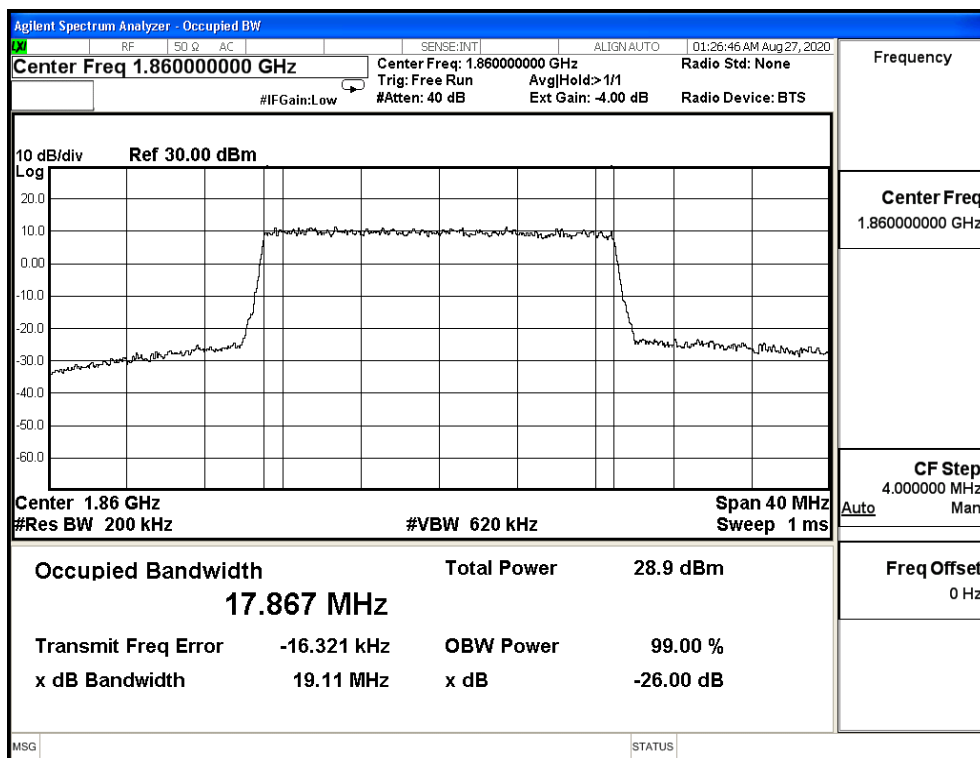


16QAM_CH26365_20M

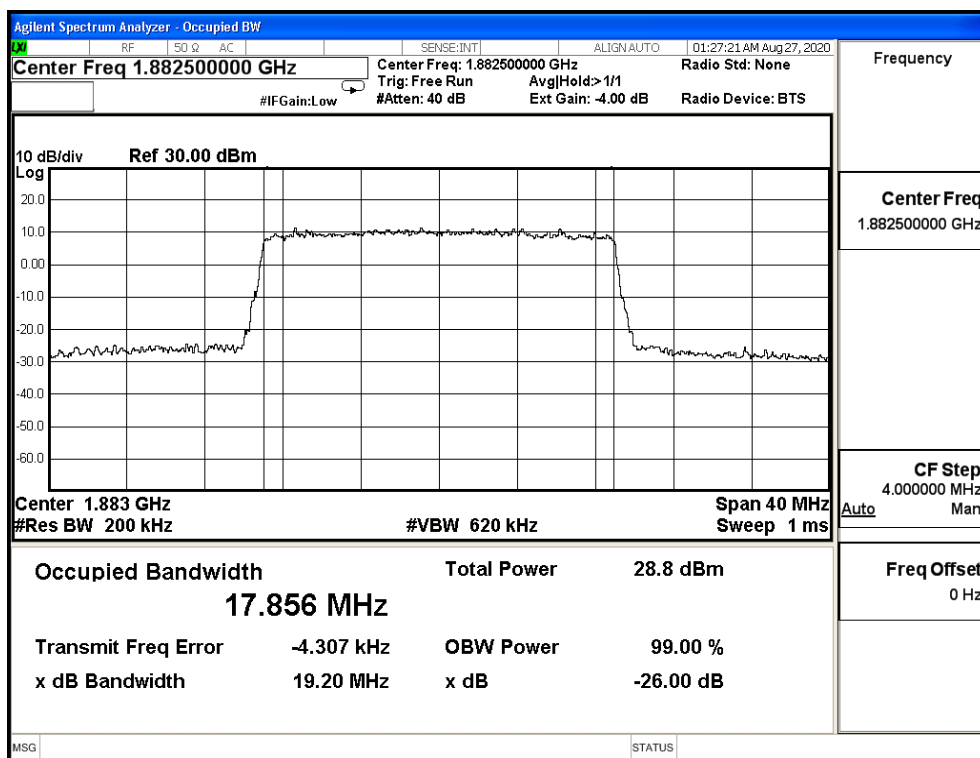


16QAM_CH26590_20M

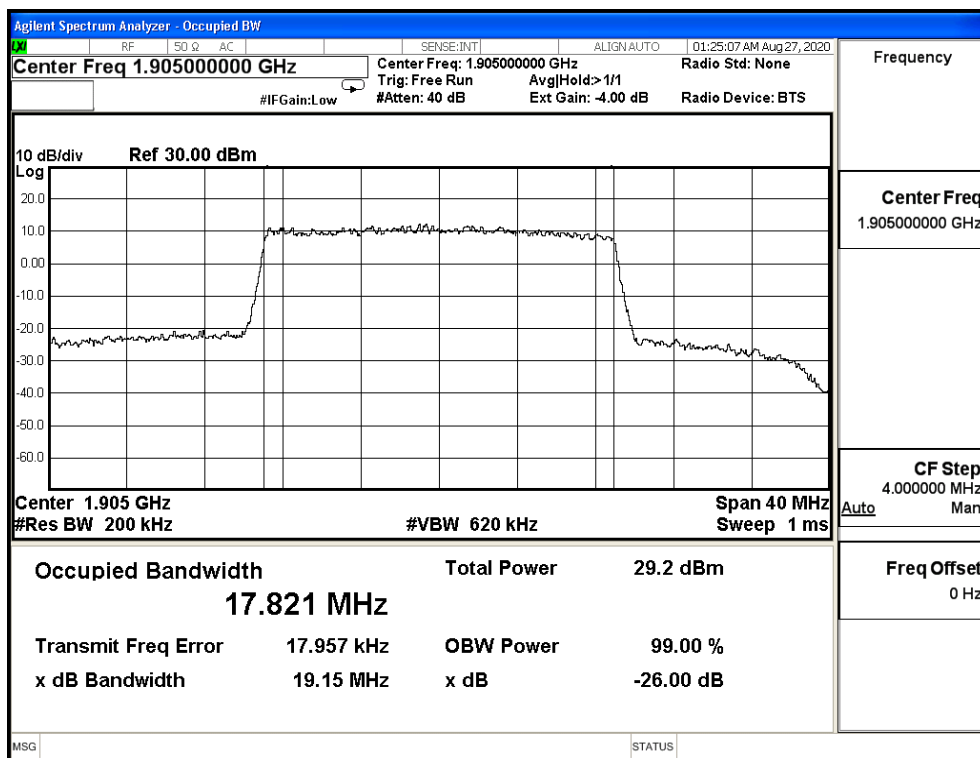


64QAM_CH26140_20M

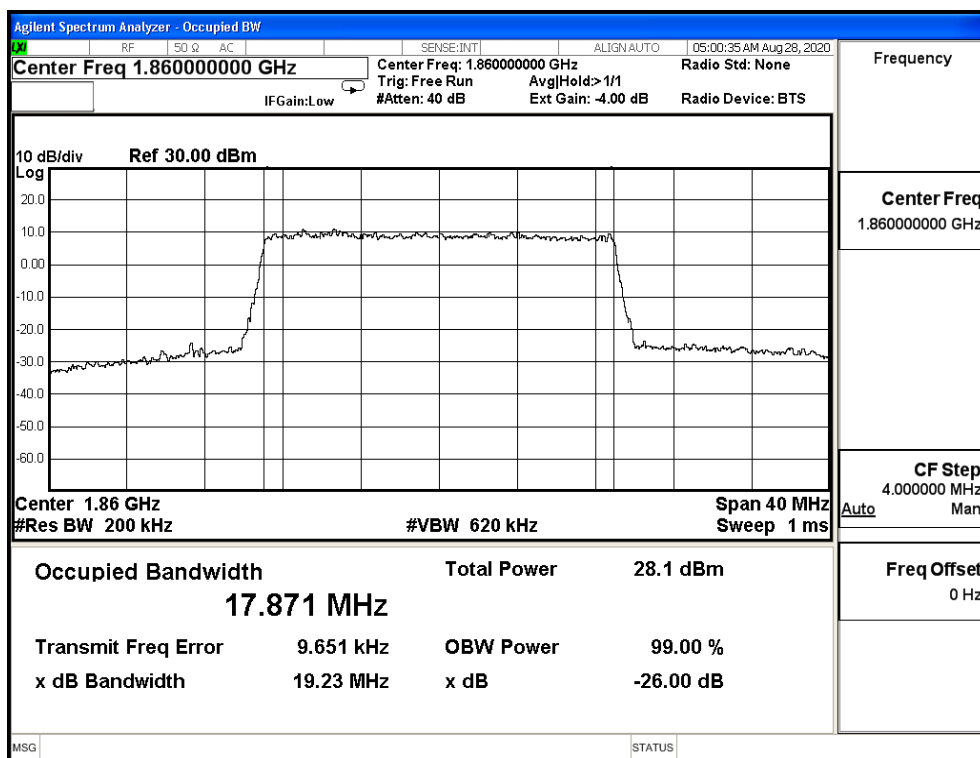

64QAM_CH26365_20M

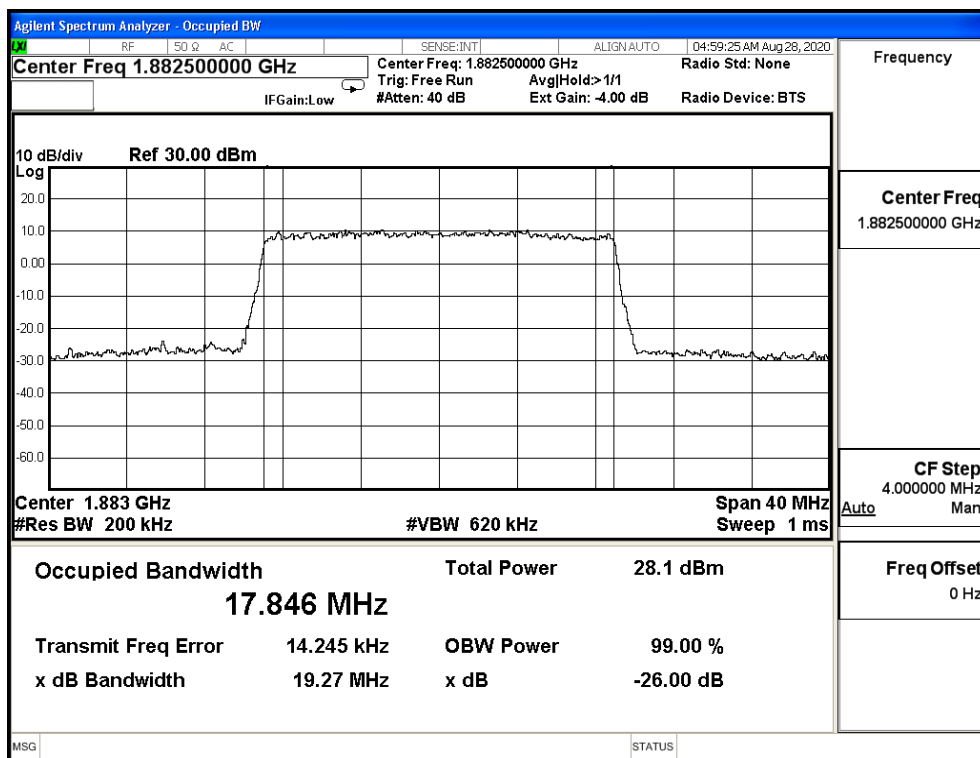

64QAM_CH26590_20M

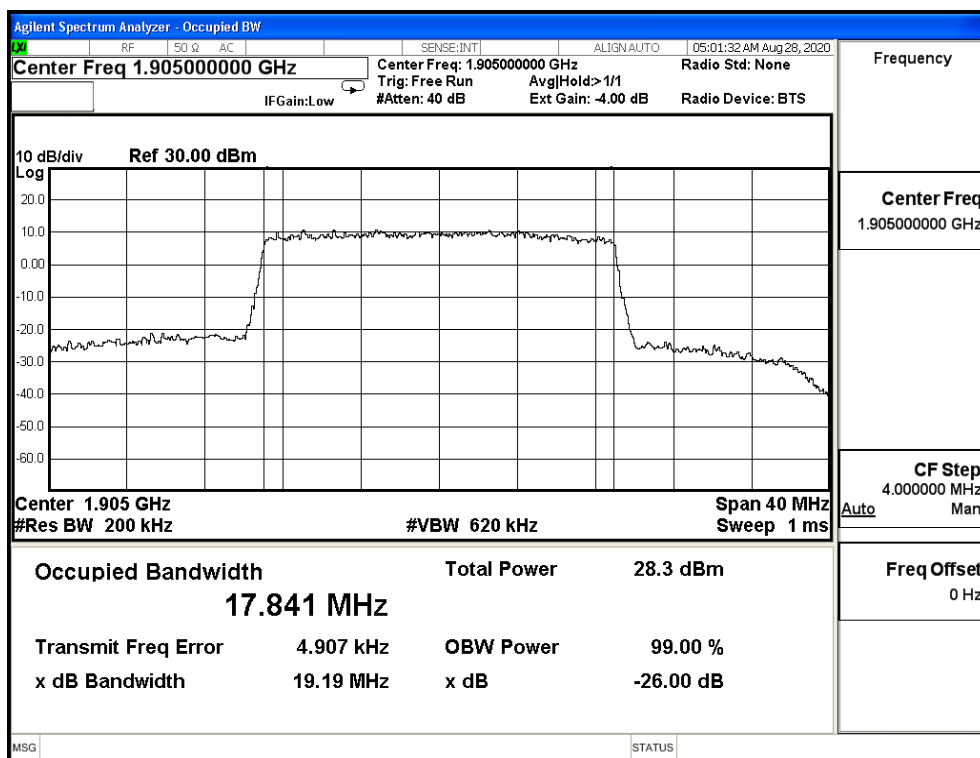


Product	Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: LTE Band 4/66		
Date of Test	2020/09/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	60


Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
1.4M	QPSK	1710.7	1.207	1.087	N/A
		1745	1.218	1.080	N/A
		1779.3	1.216	1.080	N/A
	16-QAM	1710.7	1.226	1.082	N/A
		1745	1.223	1.082	N/A
		1779.3	1.203	1.079	N/A
	64-QAM	1710.7	1.214	1.080	N/A
		1745	1.212	1.079	N/A
		1779.3	1.214	1.079	N/A
3M	QPSK	1711.5	2.926	2.694	N/A
		1745	2.916	2.685	N/A
		1778.5	2.950	2.688	N/A
	16-QAM	1711.5	2.934	2.685	N/A
		1745	2.955	2.684	N/A
		1778.5	2.946	2.682	N/A
	64-QAM	1711.5	2.917	2.682	N/A
		1745	2.908	2.683	N/A
		1778.5	2.912	2.684	N/A
5M	QPSK	1712.5	4.908	4.490	N/A
		1745	4.876	4.481	N/A
		1777.5	4.893	4.469	N/A
	16-QAM	1712.5	4.880	4.473	N/A
		1745	4.894	4.481	N/A
		1777.5	4.904	4.475	N/A
	64-QAM	1712.5	4.878	4.486	N/A
		1745	4.893	4.483	N/A
		1777.5	4.889	4.483	N/A

Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
10M	QPSK	1715	9.642	8.950	N/A
		1745	9.701	8.960	N/A
		1775	9.600	8.950	N/A
	16-QAM	1715	9.655	8.949	N/A
		1745	9.610	8.952	N/A
		1775	9.639	8.945	N/A
	64-QAM	1715	9.642	8.937	N/A
		1745	9.641	8.942	N/A
		1775	9.652	8.940	N/A
15M	QPSK	1717.5	14.550	13.437	N/A
		1745	14.510	13.418	N/A
		1772.5	14.400	13.399	N/A
	16-QAM	1717.5	14.510	13.424	N/A
		1745	14.340	13.415	N/A
		1772.5	14.400	13.412	N/A
	64-QAM	1717.5	14.510	13.393	N/A
		1745	14.510	13.383	N/A
		1772.5	14.490	13.395	N/A
20M	QPSK	1720	19.080	17.850	N/A
		1745	19.400	17.911	N/A
		1770	19.060	17.853	N/A
	16-QAM	1720	19.150	17.903	N/A
		1745	19.220	17.879	N/A
		1770	19.170	17.877	N/A
	64-QAM	1720	19.230	17.857	N/A
		1745	19.280	17.878	N/A
		1770	19.230	17.872	N/A


QPSK_CH131979_ 1.4M

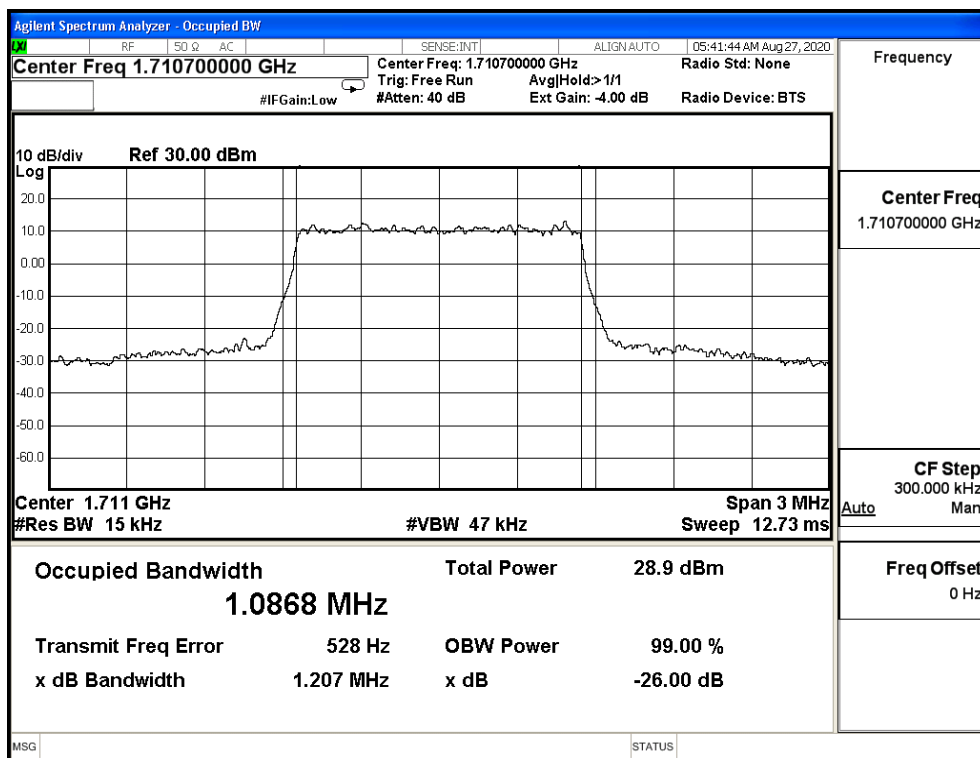


QPSK_CH132322_ 1.4M

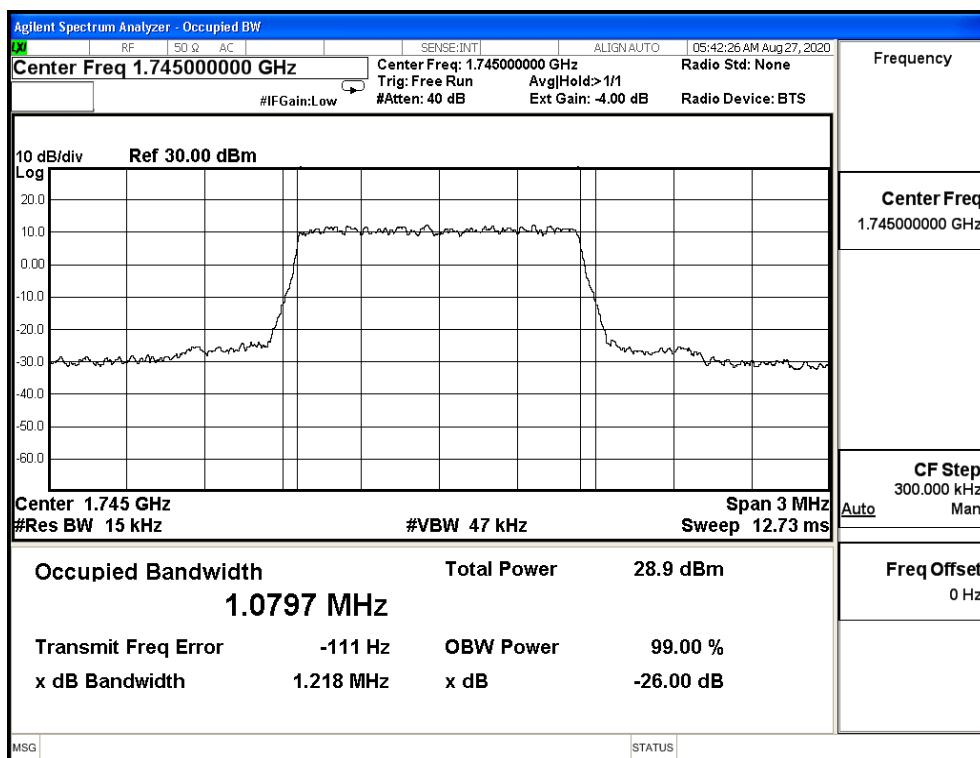


QPSK_CH132665_ 1.4M

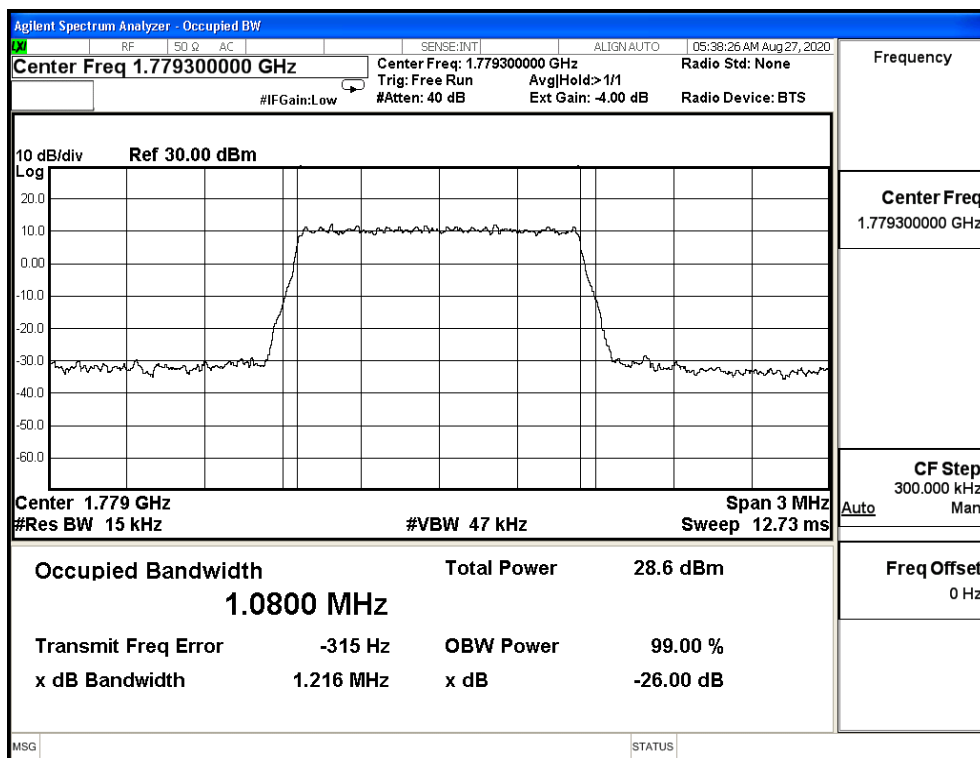


16QAM_CH131979_ 1.4M

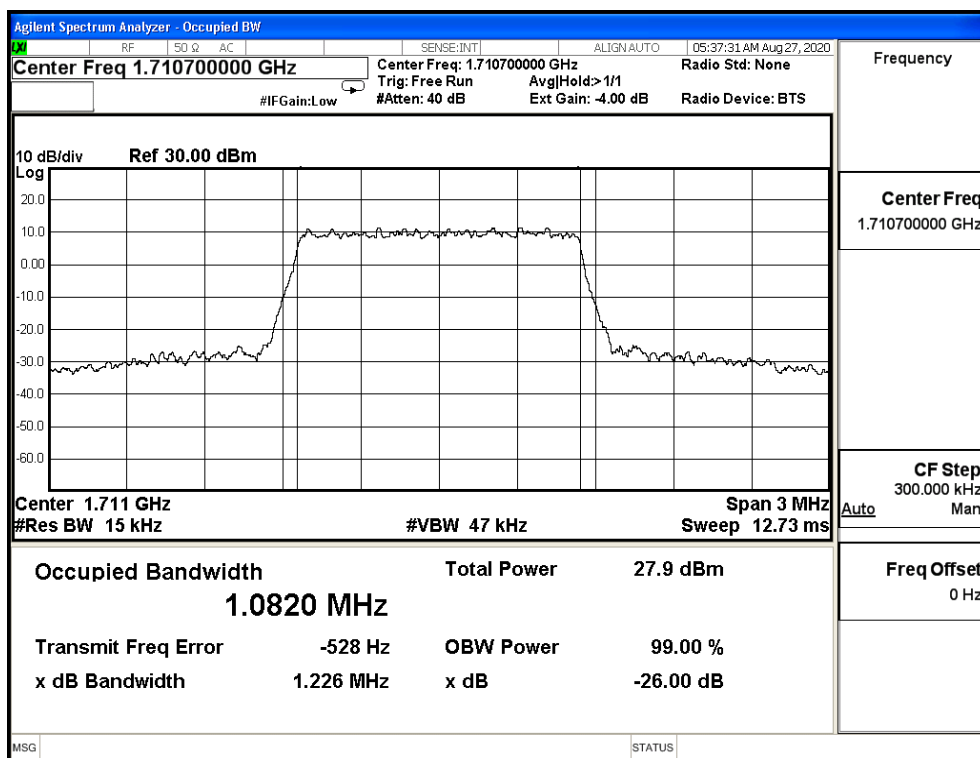


16QAM_CH132322_ 1.4M

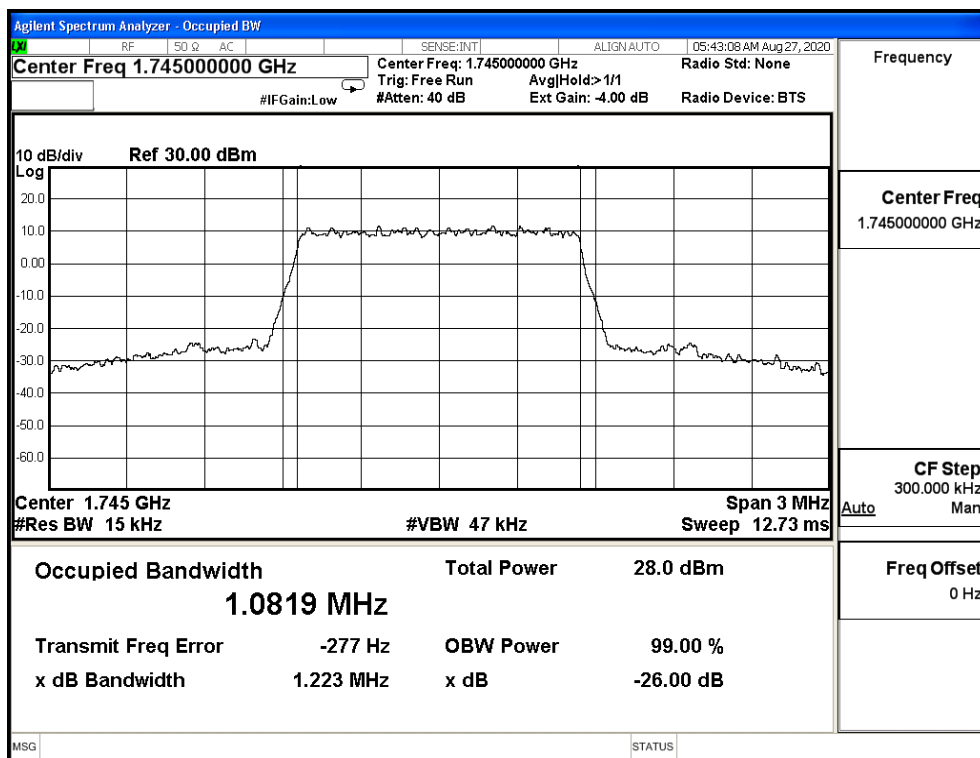


16QAM_CH132665_ 1.4M

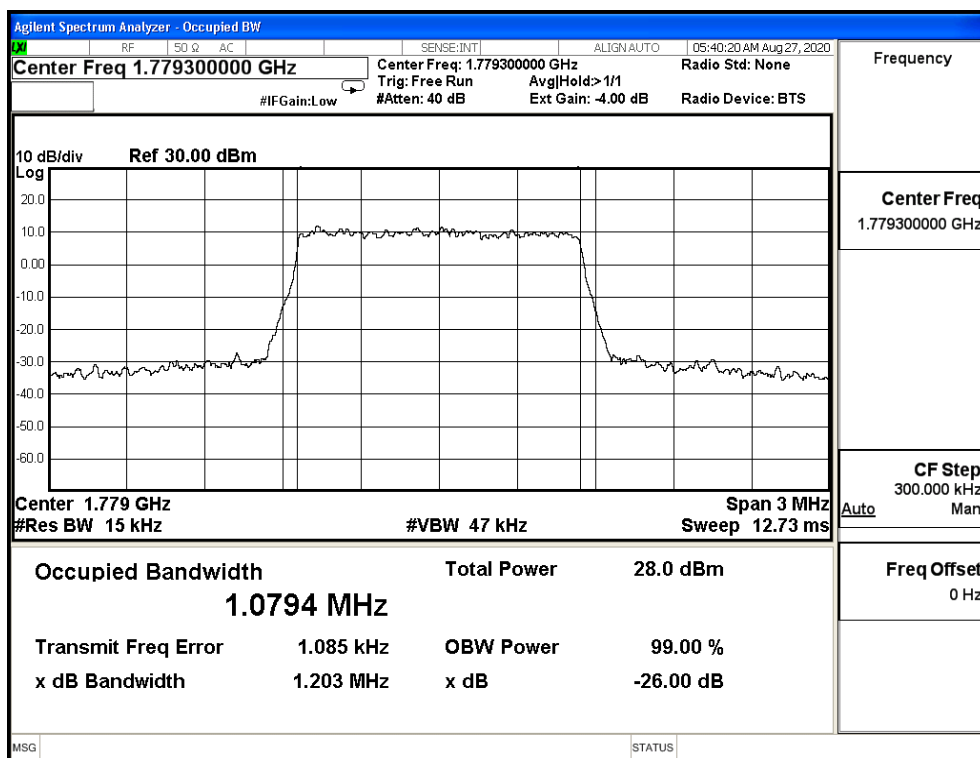


64QAM_CH131979_ 1.4M

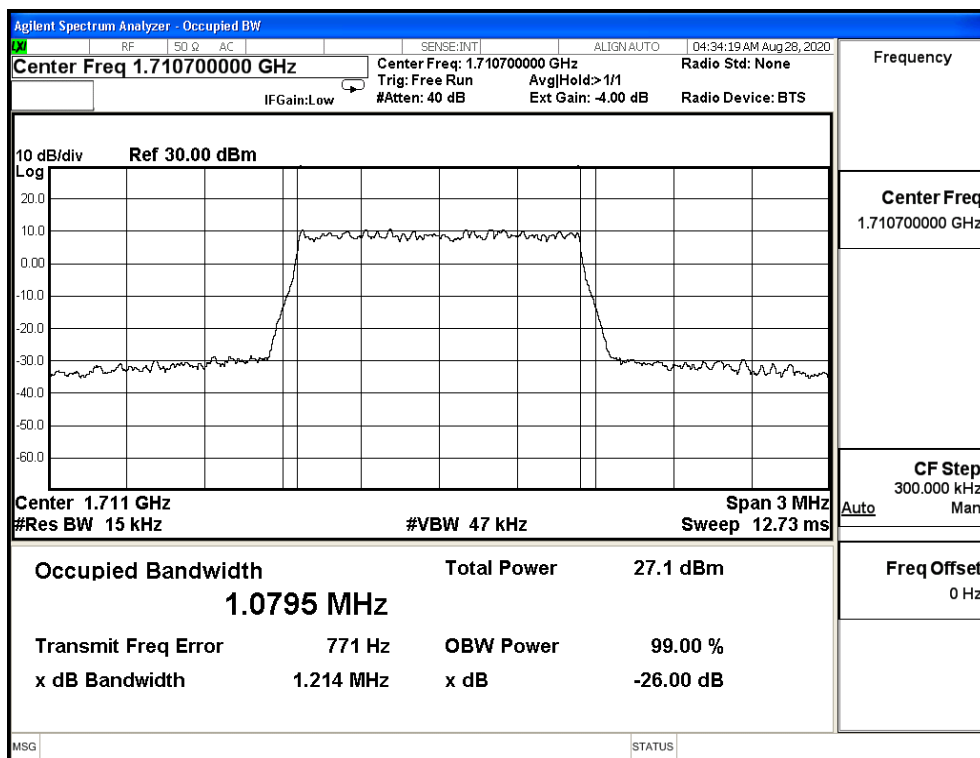


64QAM_CH132322_ 1.4M

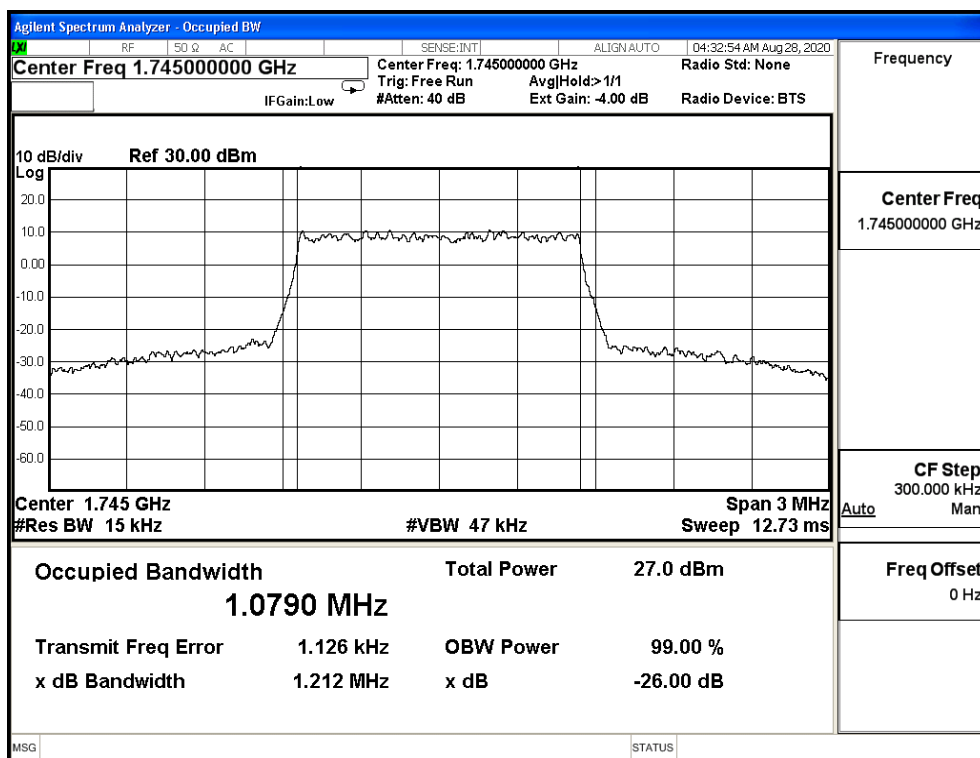


64QAM_CH132665_1.4M

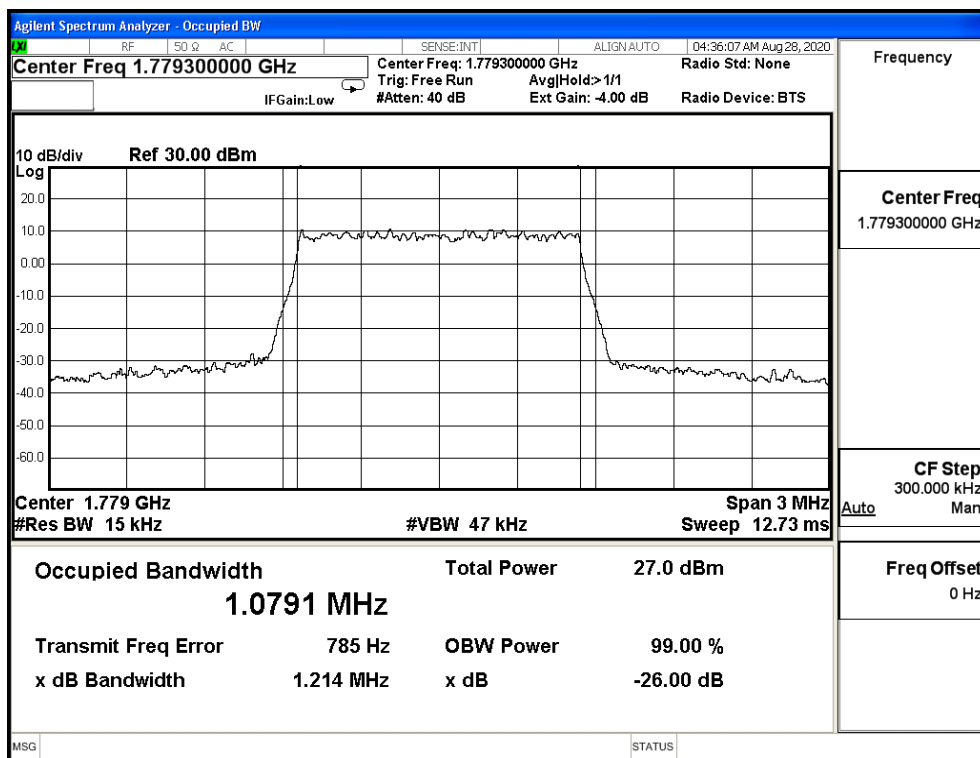


QPSK_CH131987_3M

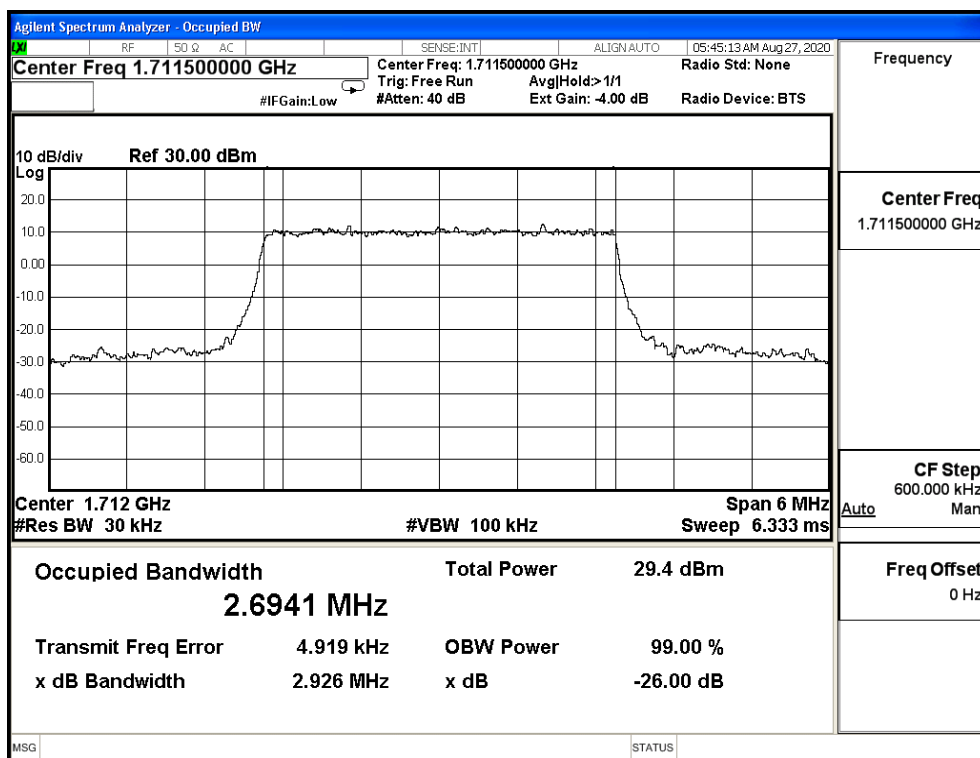


QPSK_CH132322_3M

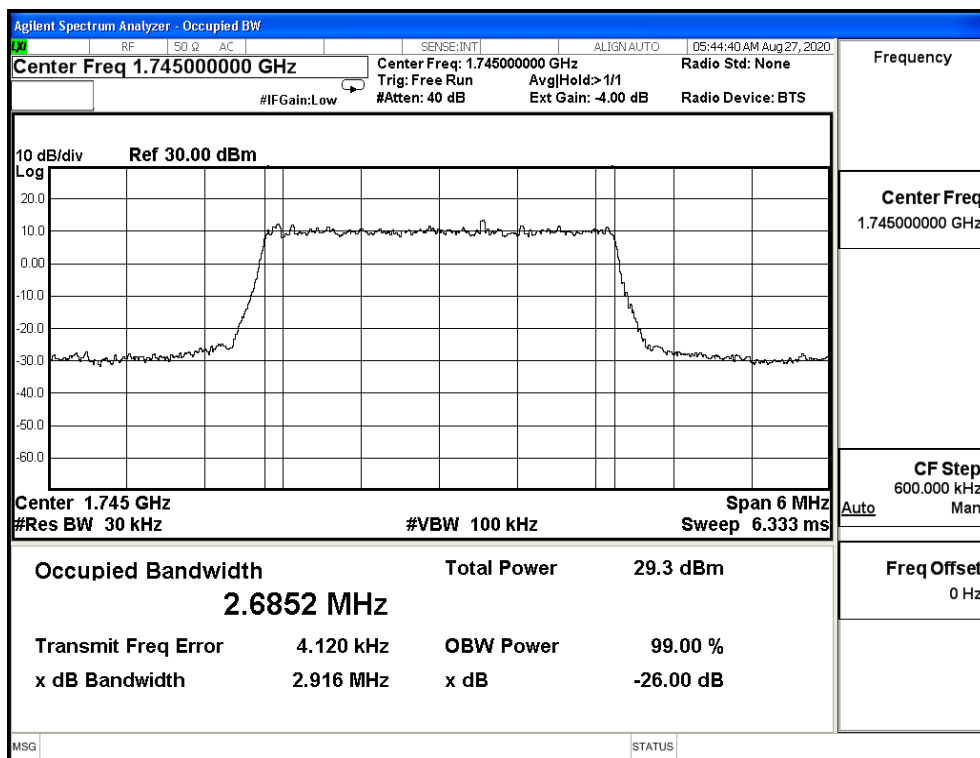


QPSK_CH132657_3M

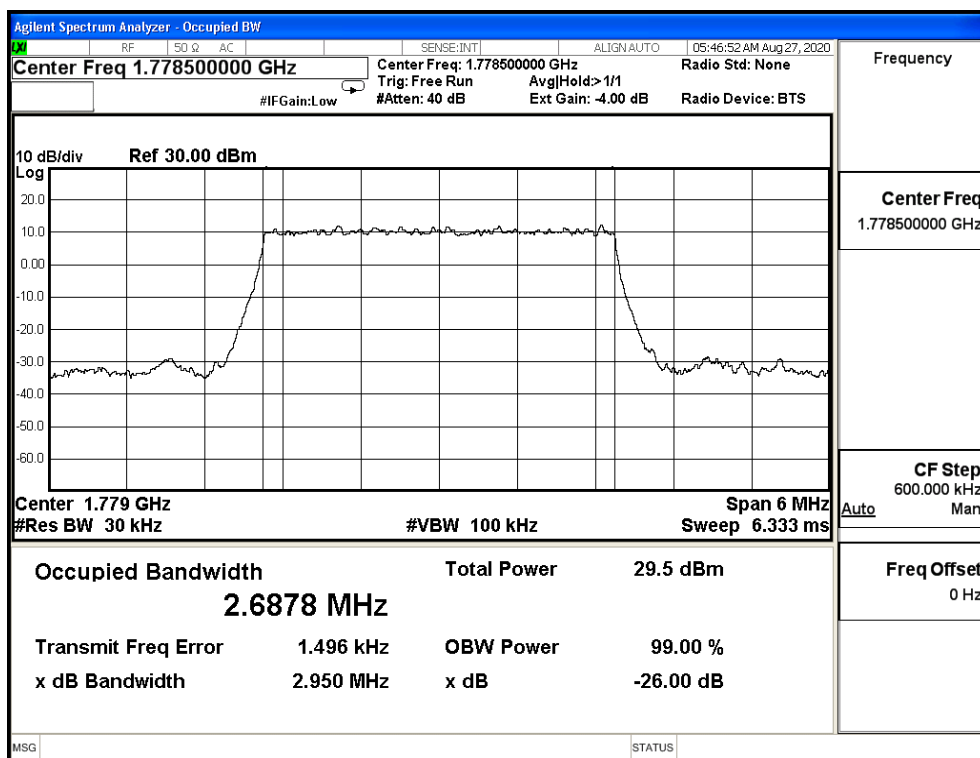


16QAM_CH131987_3M

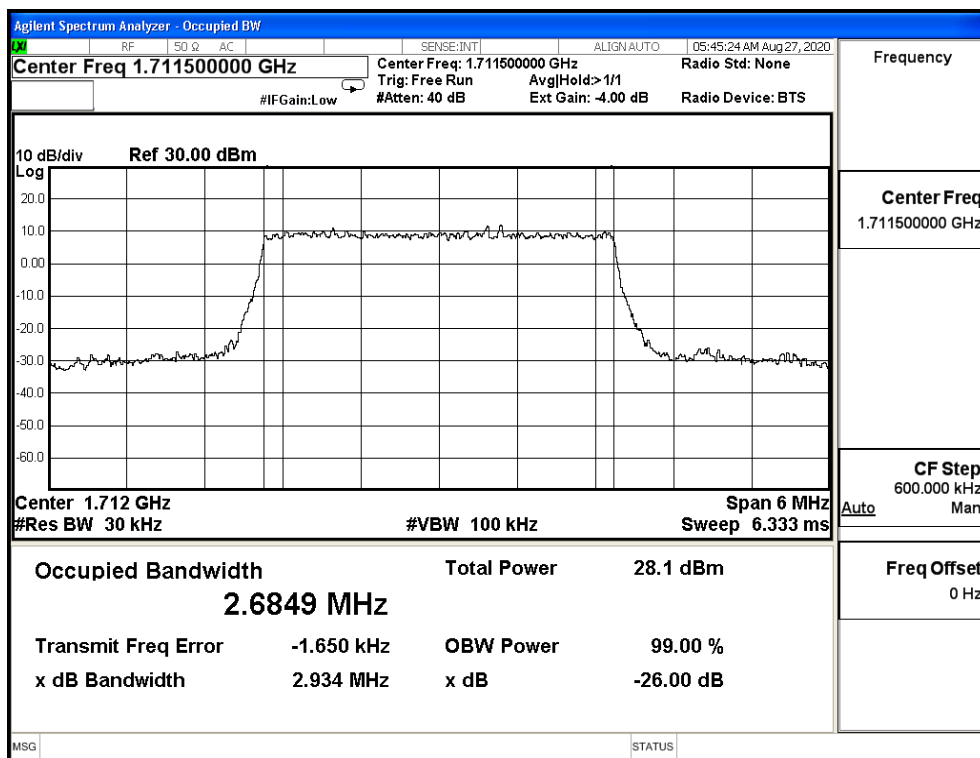


16QAM_CH132322_3M

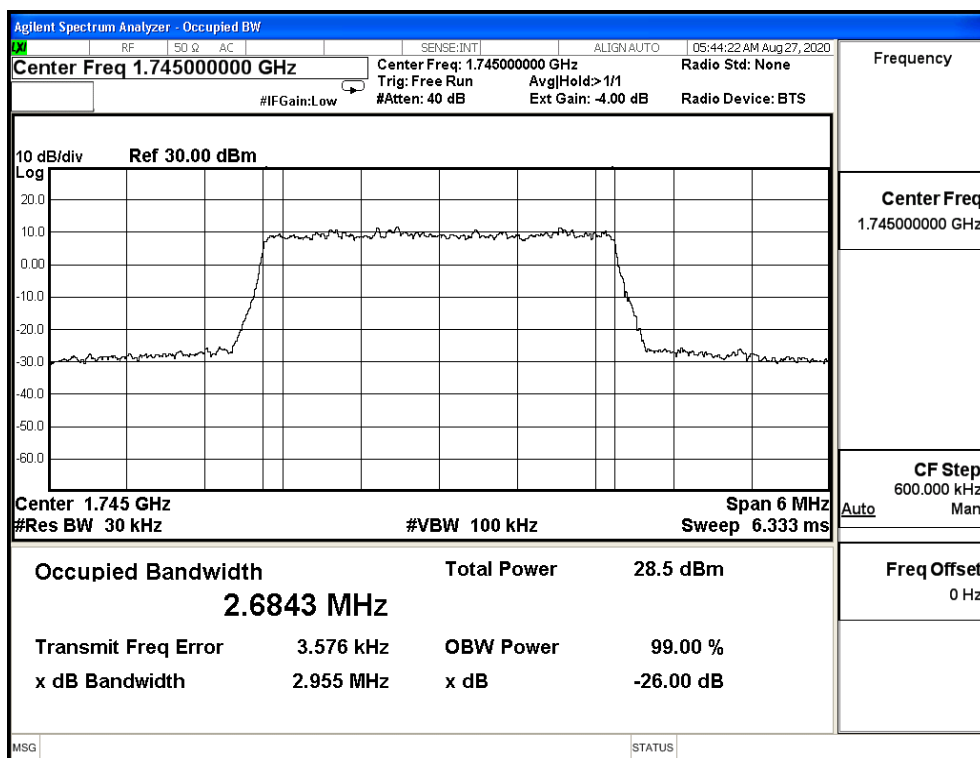


16QAM_CH132657_3M

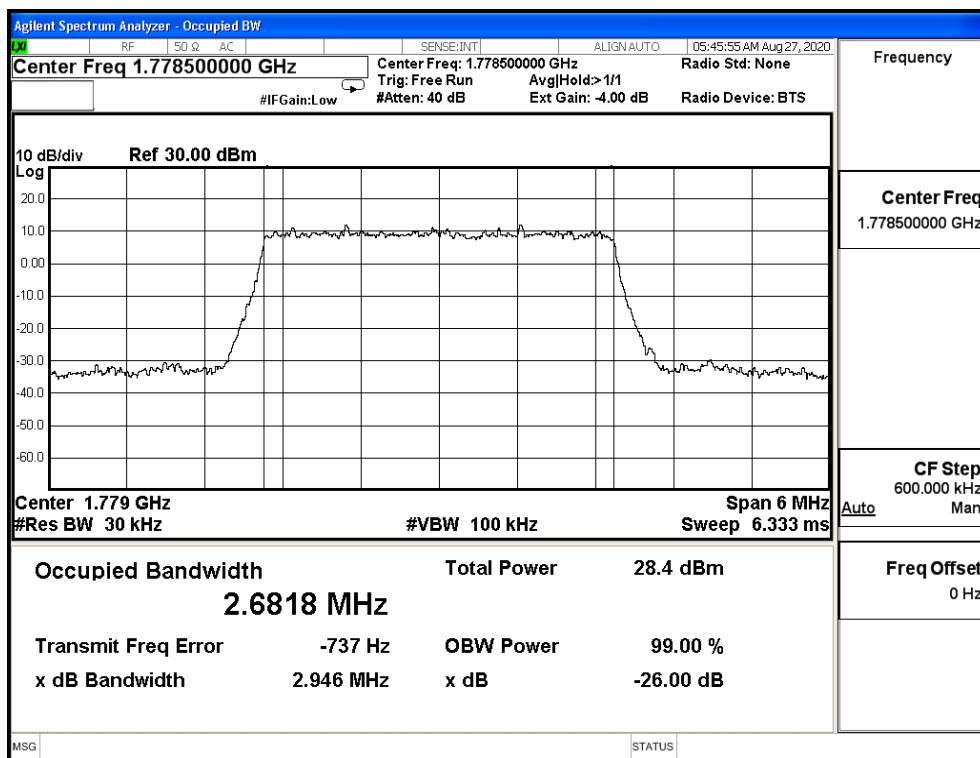


64QAM_CH131987_3M

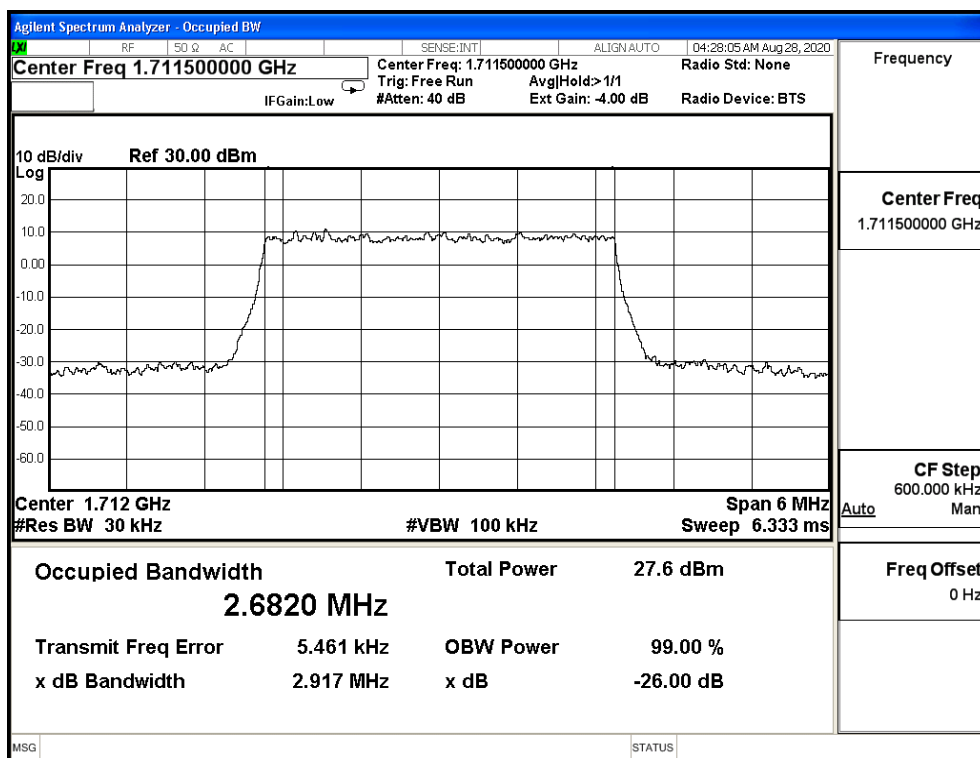


64QAM_CH132322_3M

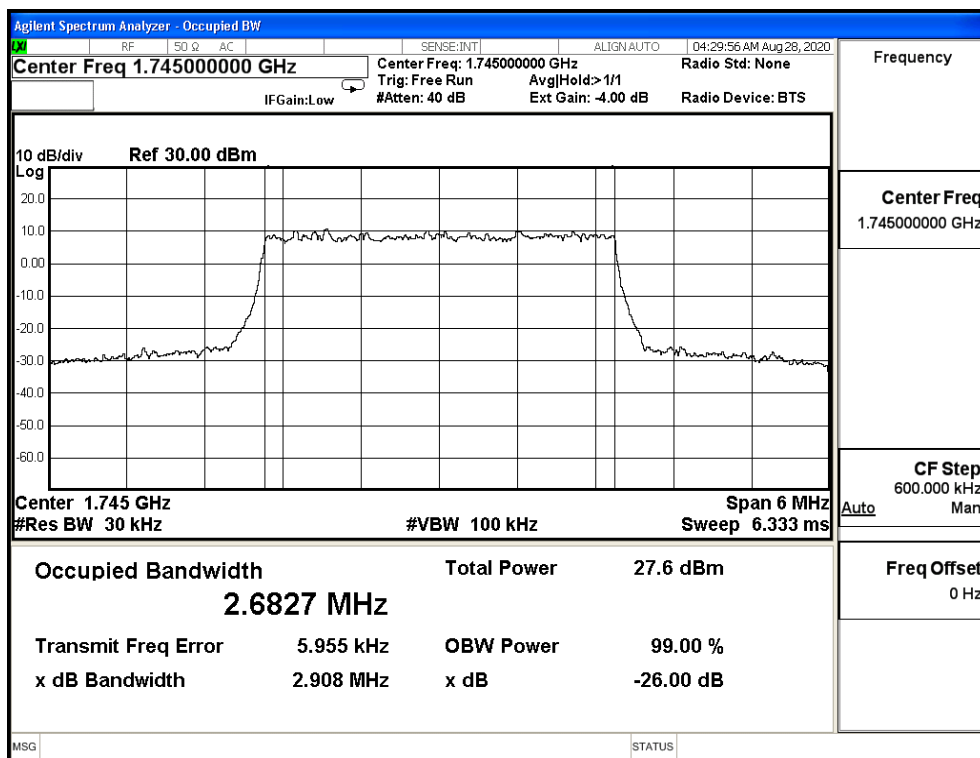


64QAM_CH132657_3M

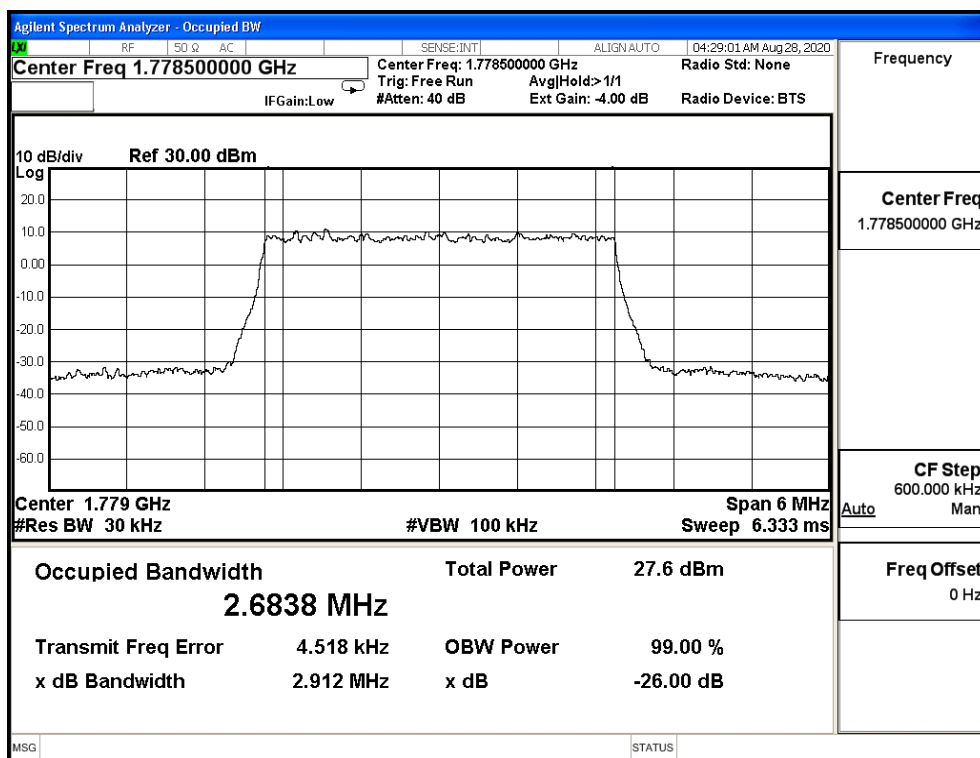


QPSK_CH131997_5M

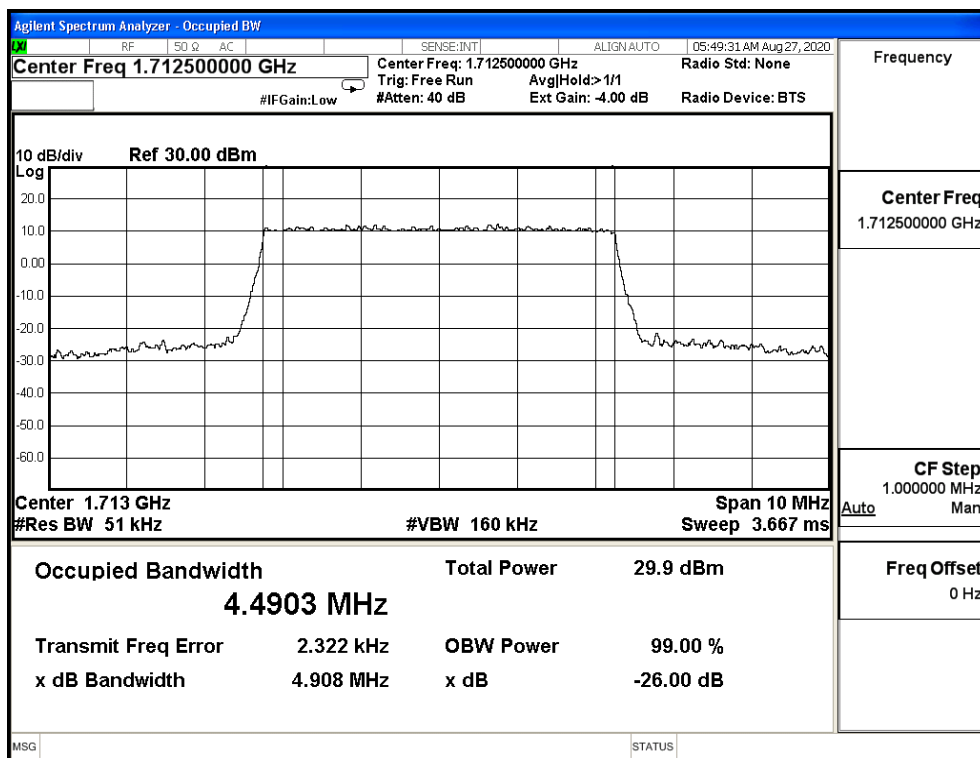


QPSK_CH132322_5M

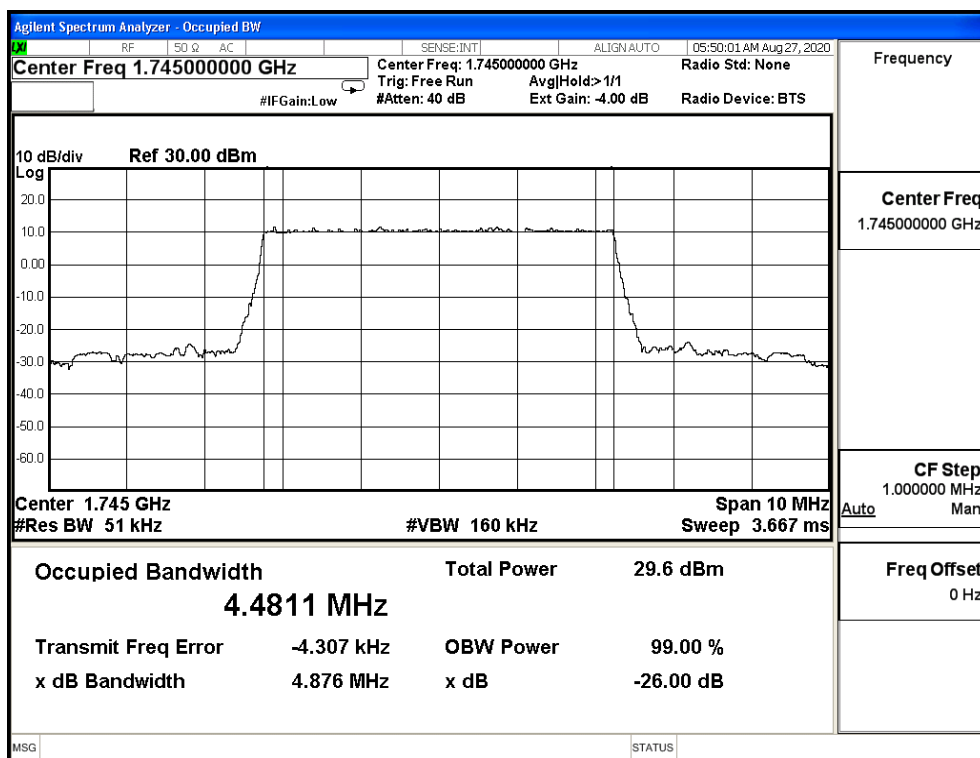


QPSK_CH132647_5M

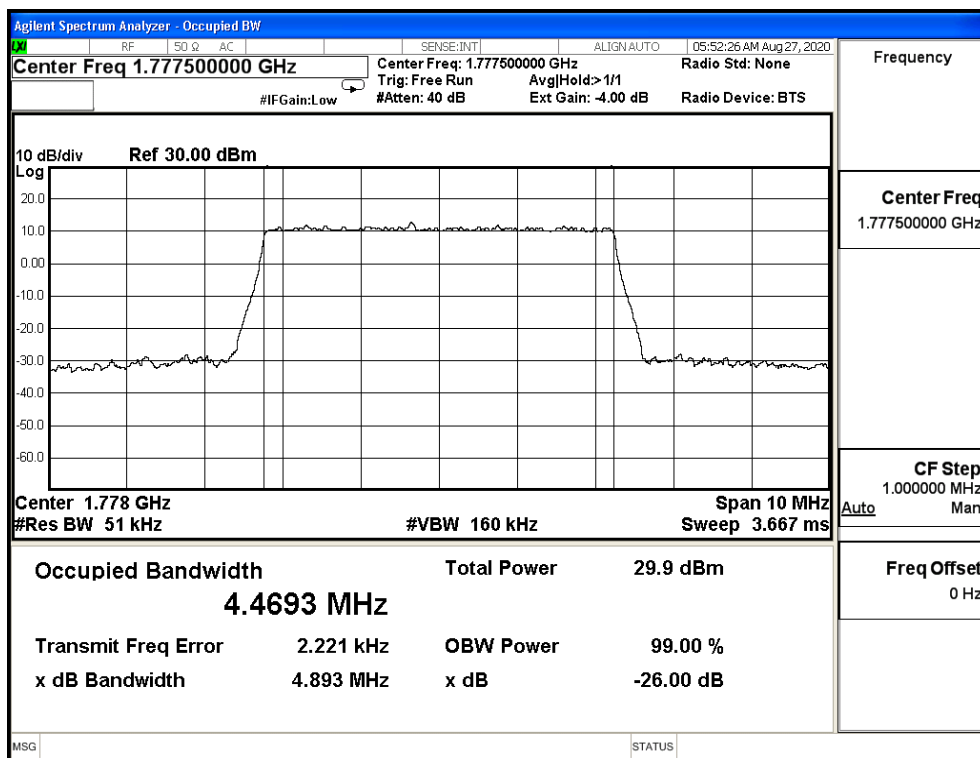


16QAM_CH131997_5M

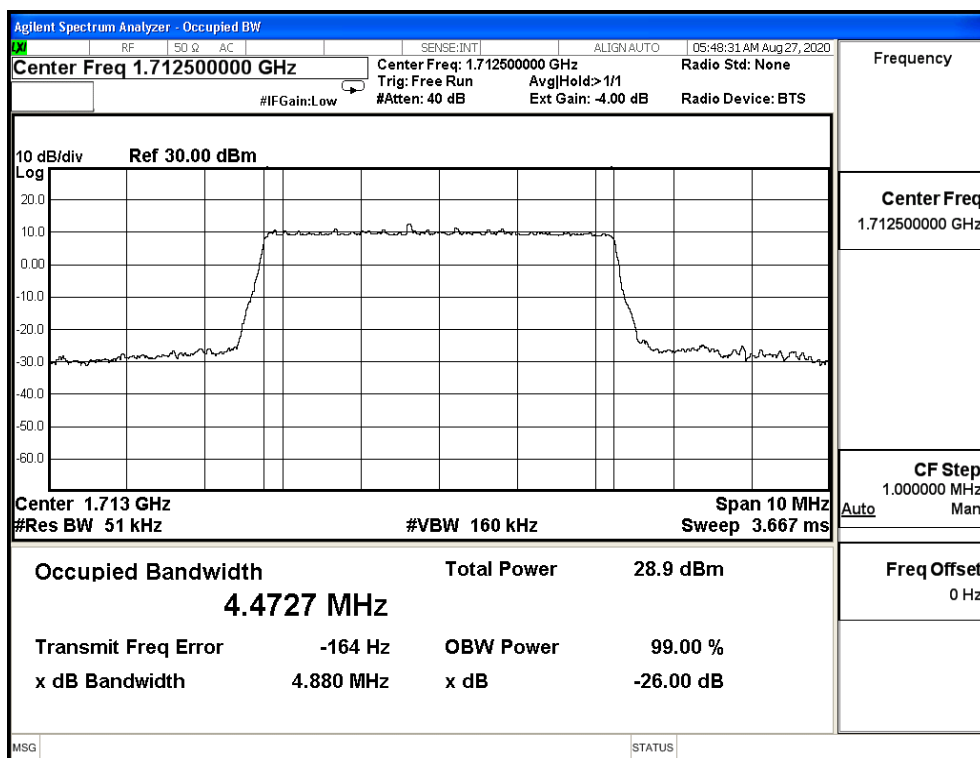


16QAM_CH132322_5M

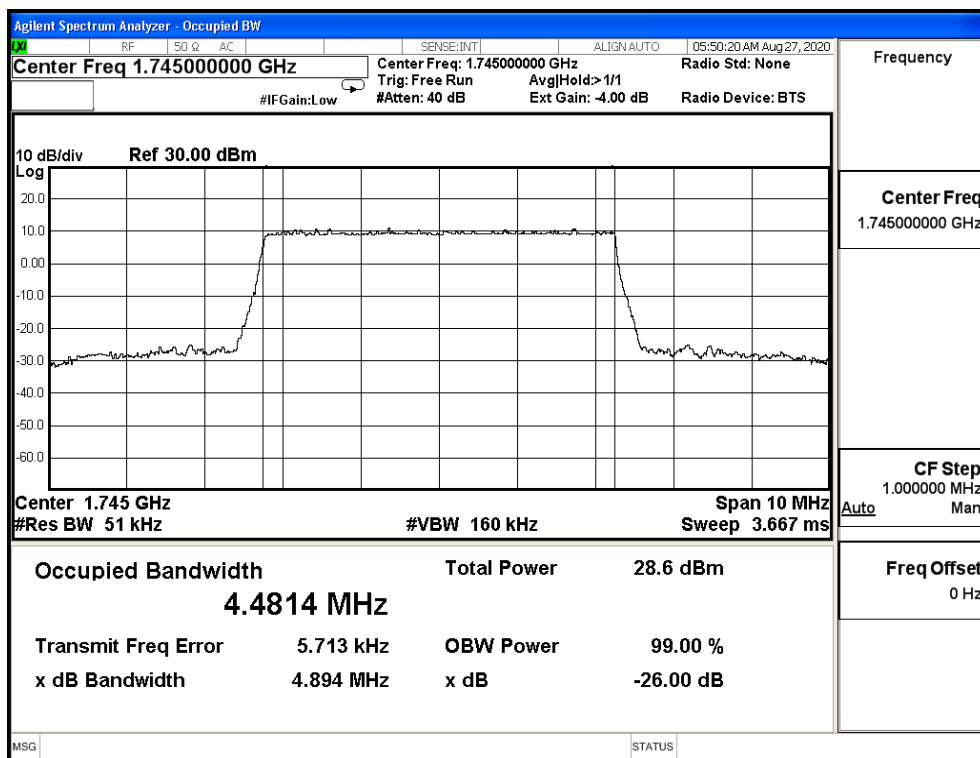


16QAM_CH132647_5M

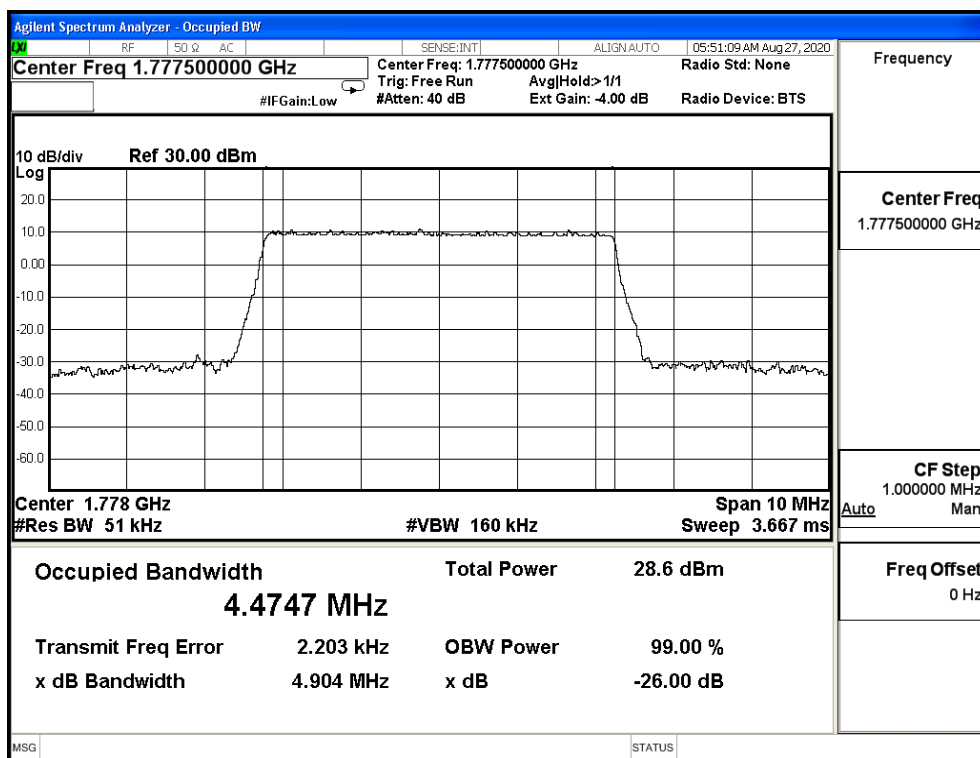


64QAM_CH131997_5M

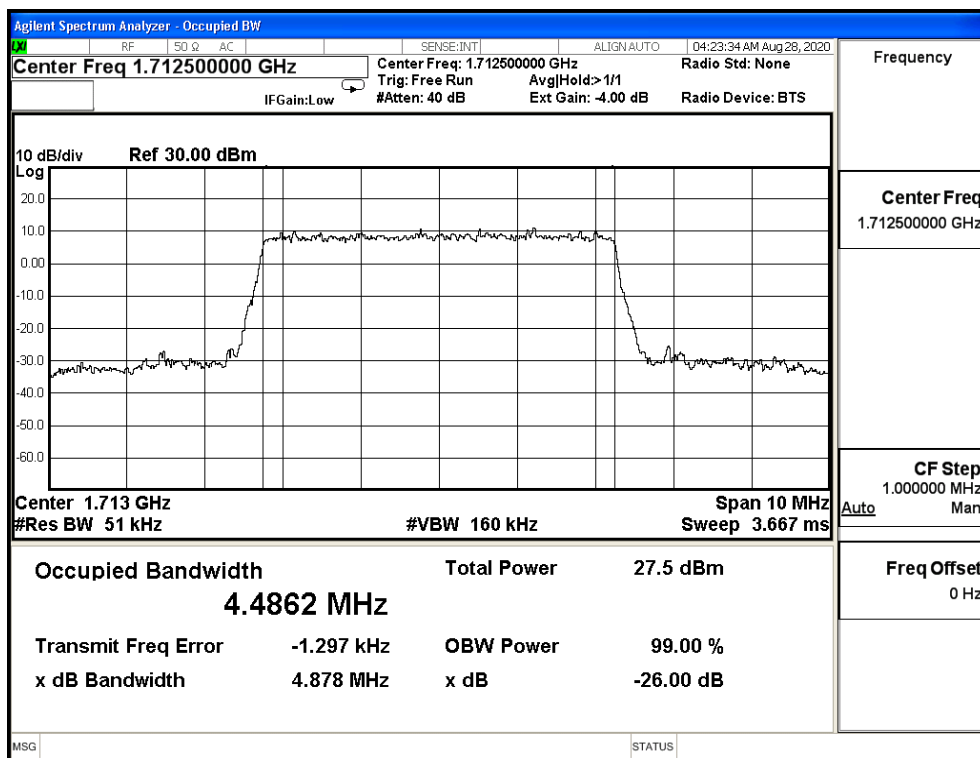


64QAM_CH132322_5M

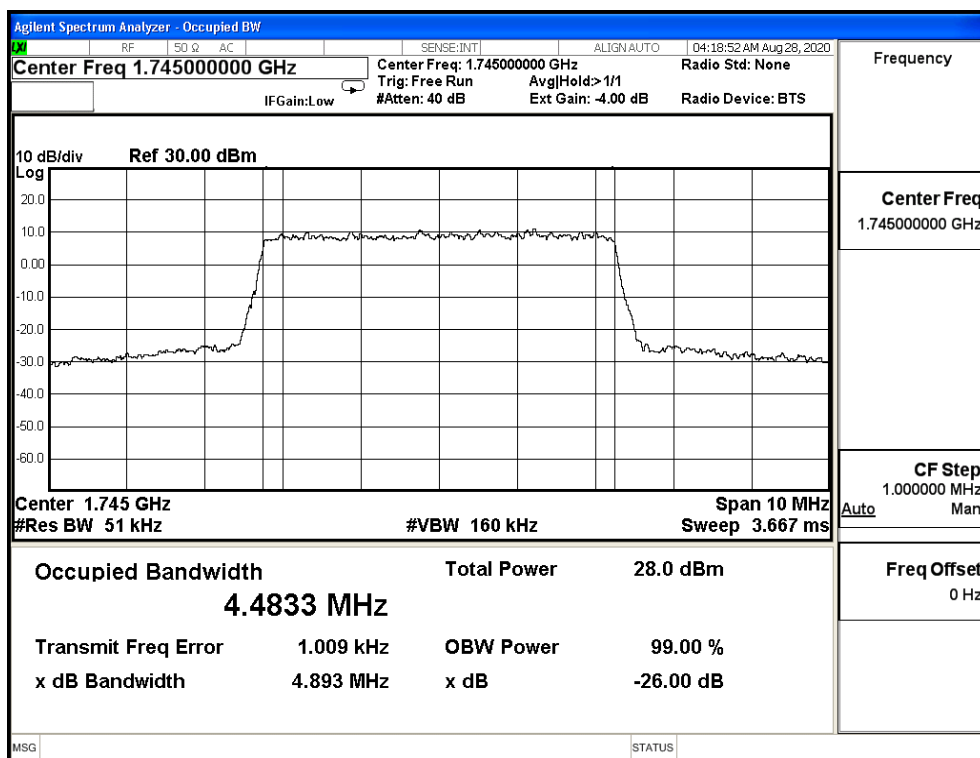


64QAM_CH132647_5M

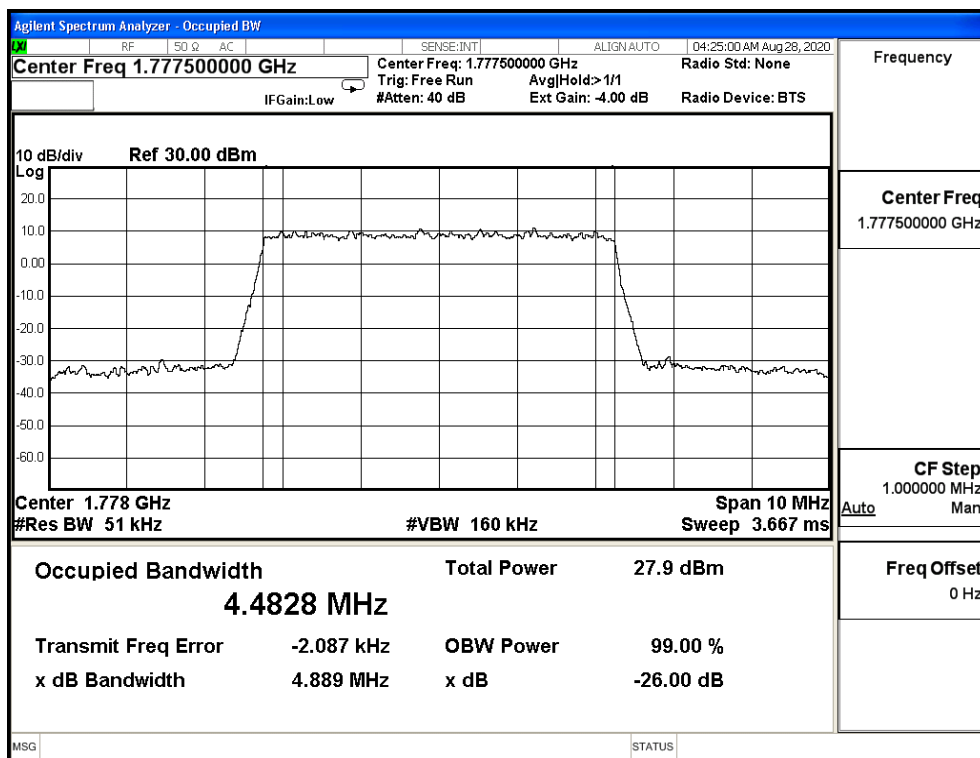


QPSK_CH132022_10M

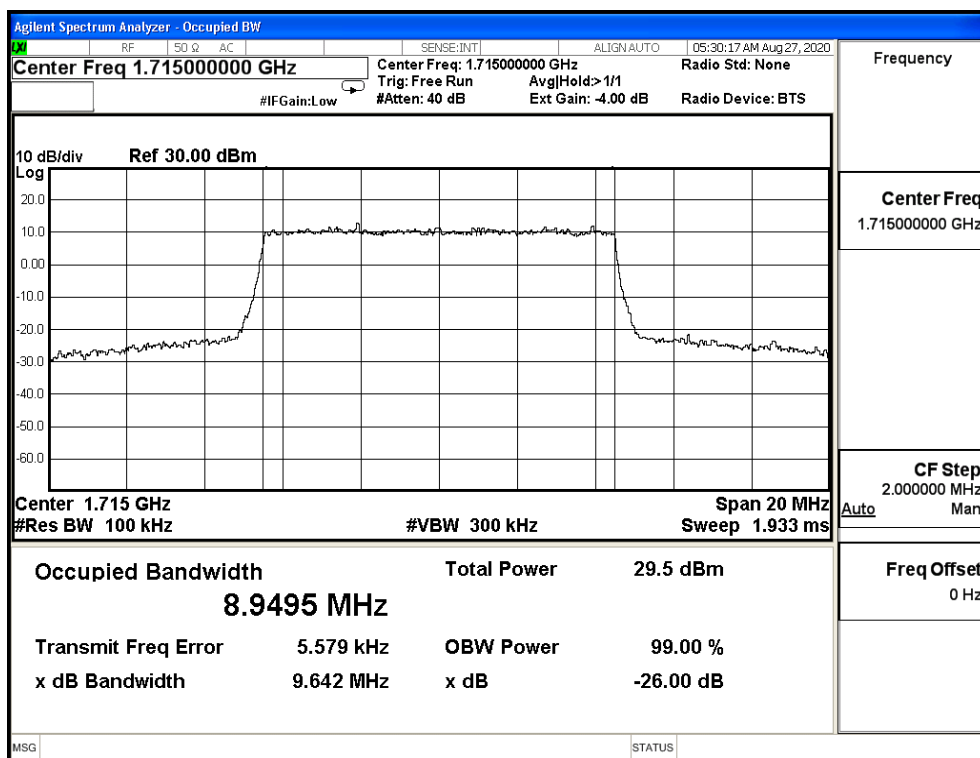


QPSK_CH132322_10M

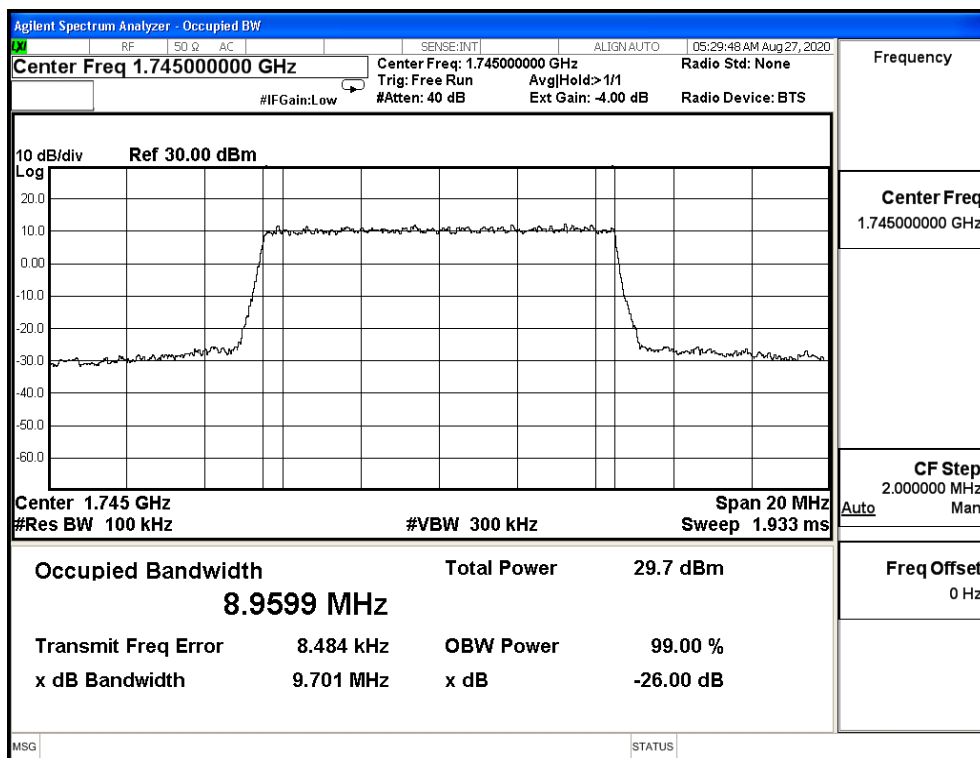


QPSK_CH132622_10M

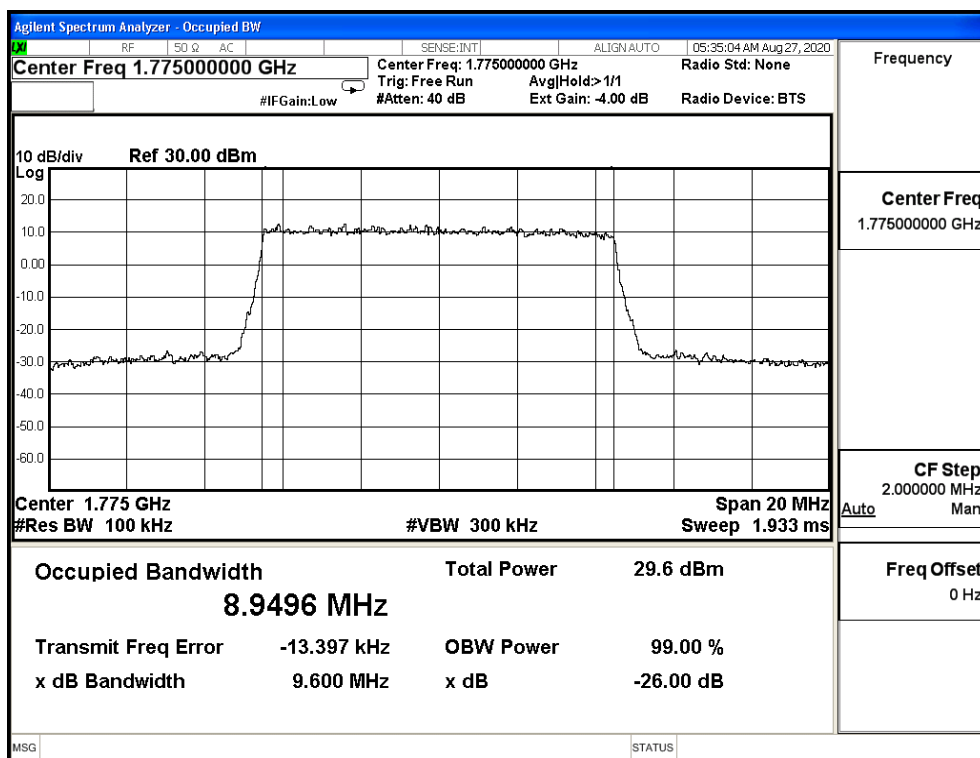


16QAM_CH132022_10M

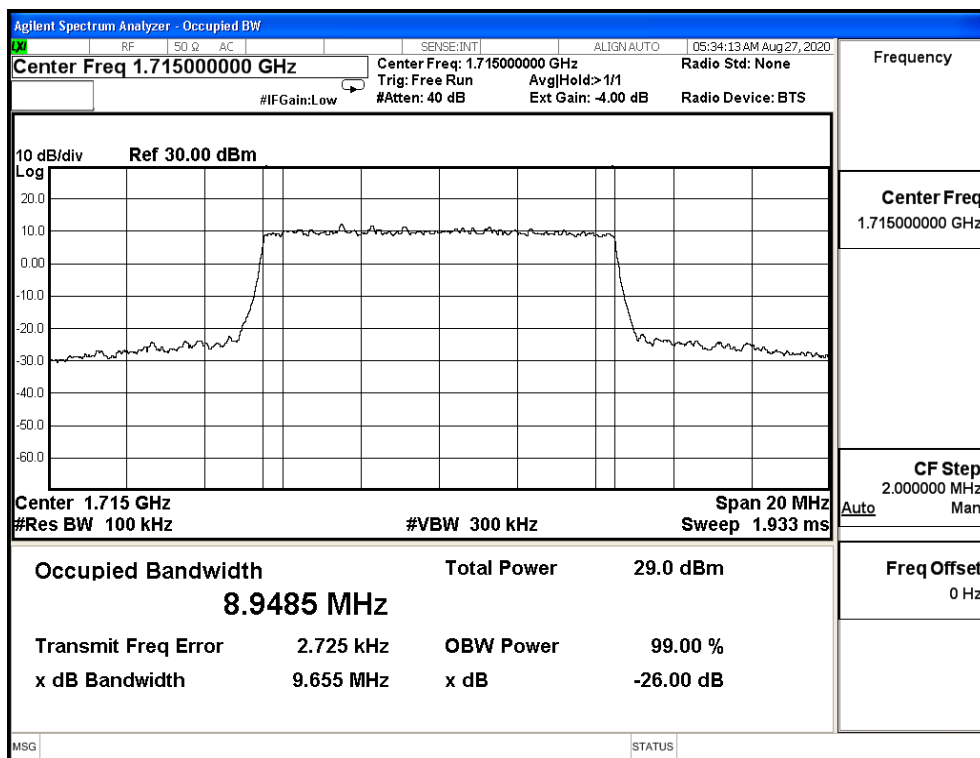


16QAM_CH132322_10M

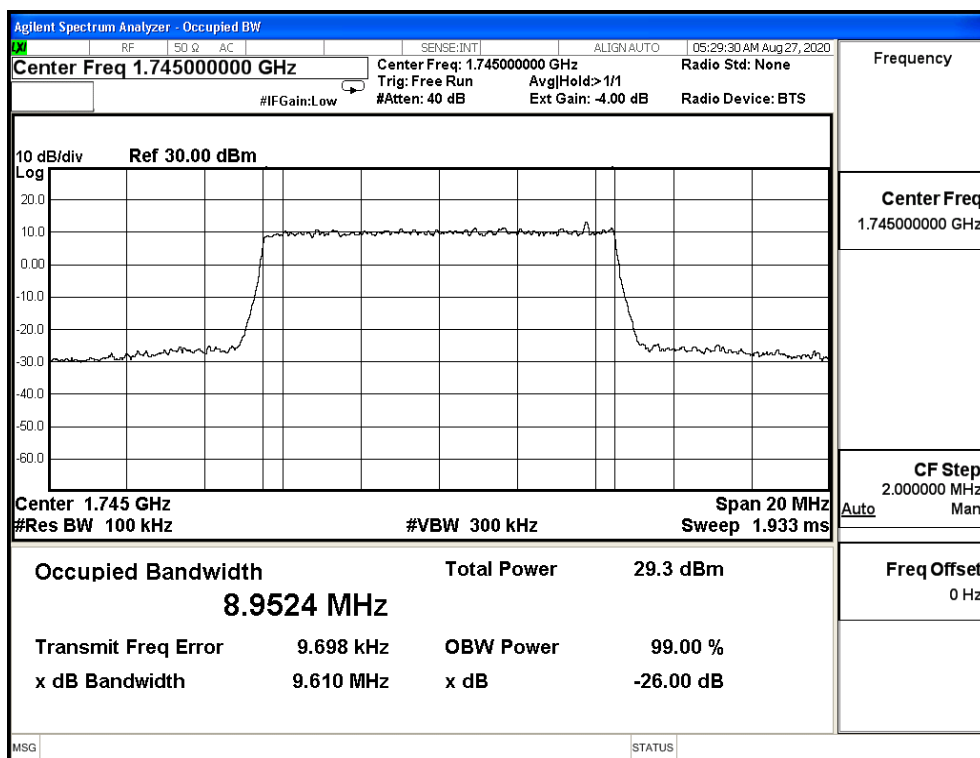


16QAM_CH132622_10M

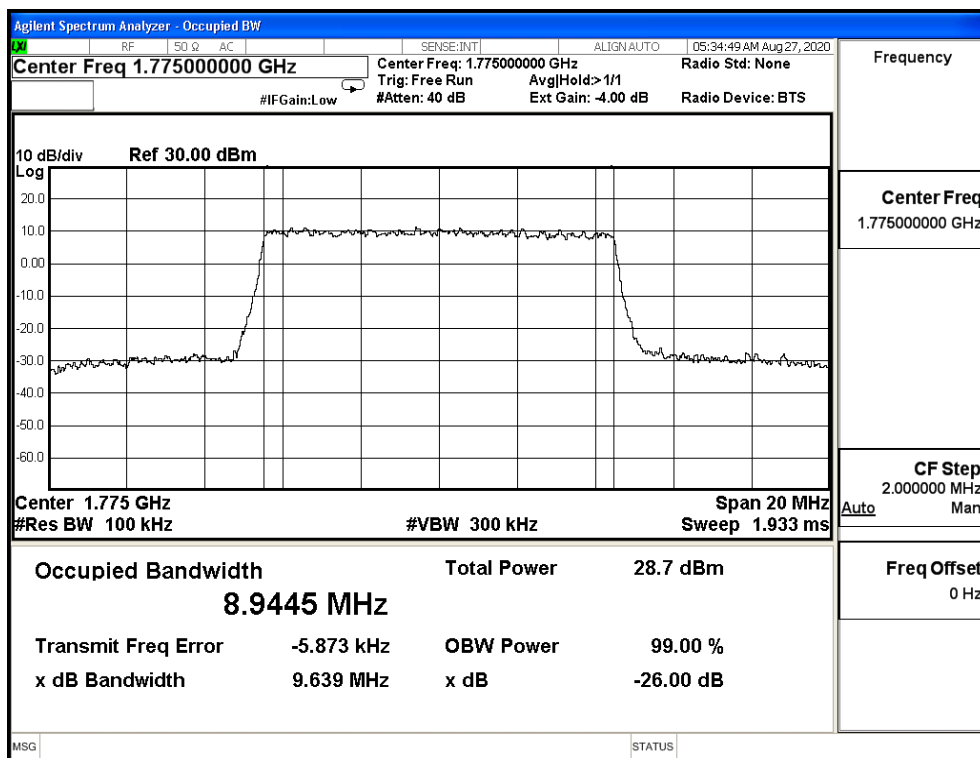


64QAM_CH132022_10M

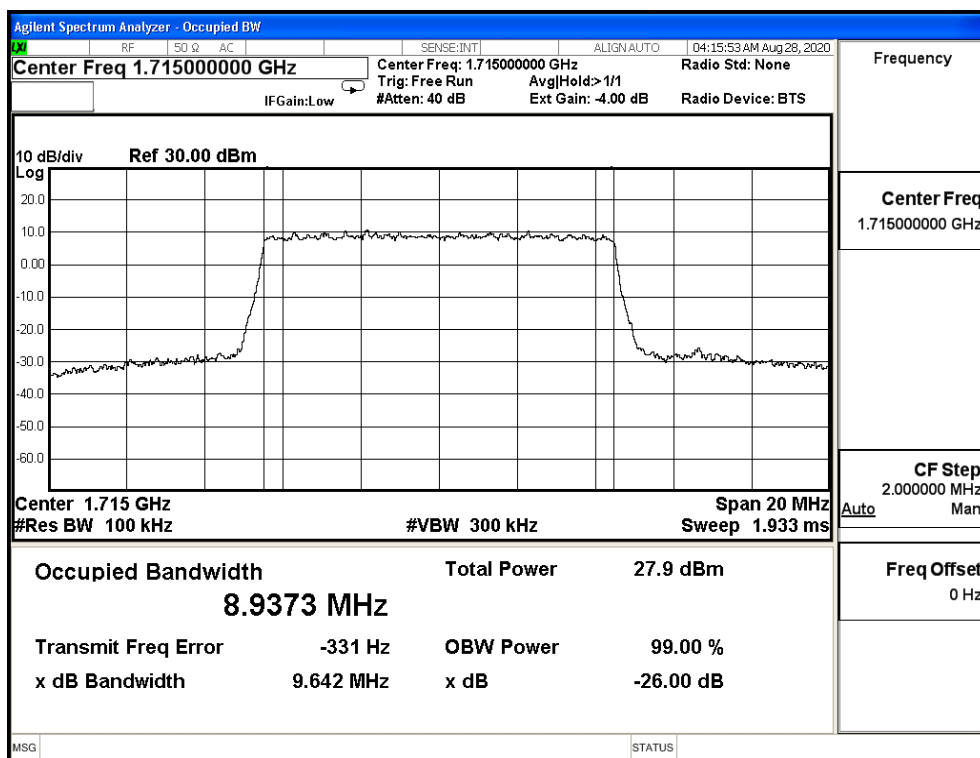


64QAM_CH132322_10M

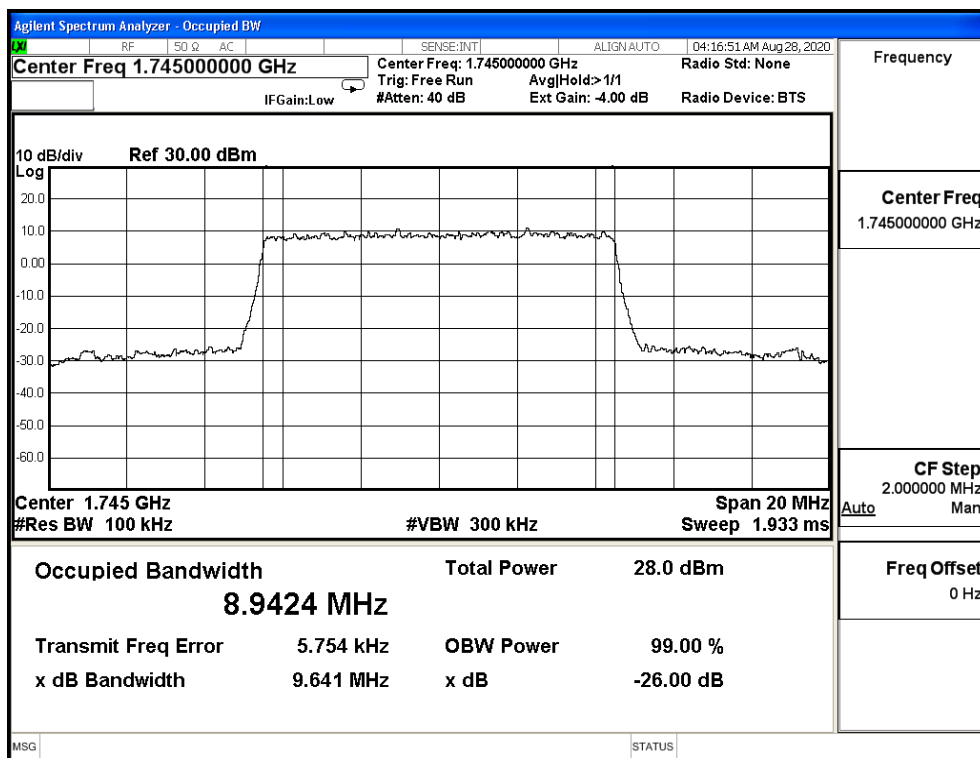


64QAM_CH132622_10M

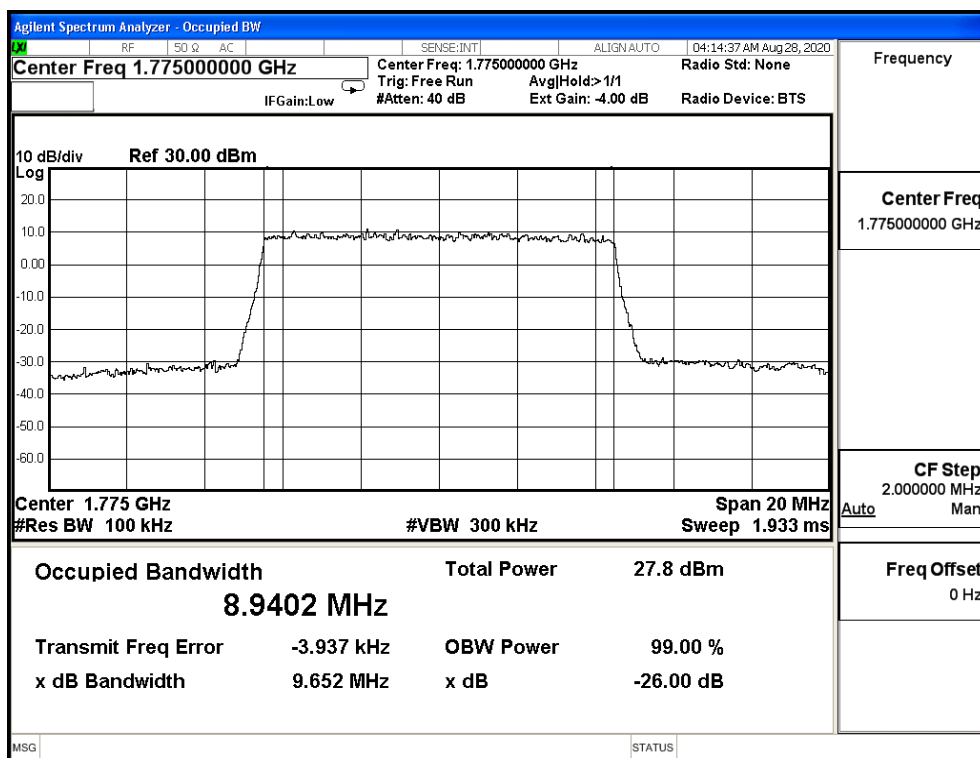


QPSK_CH132047_15M

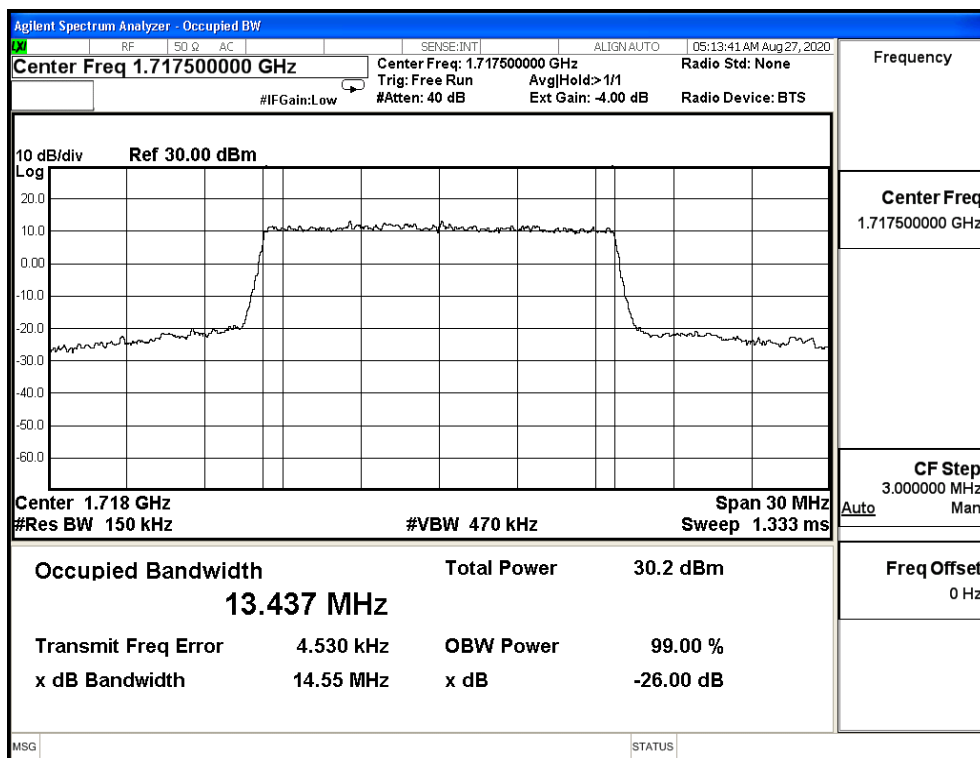


QPSK_CH132322_15M

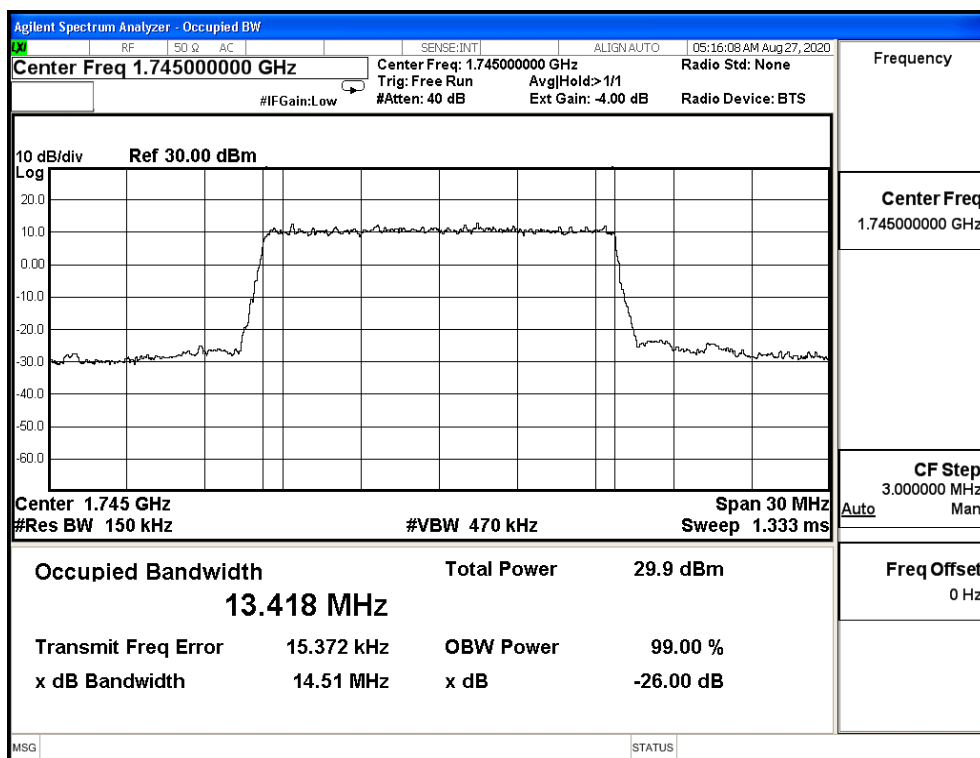


QPSK_CH132597_15M

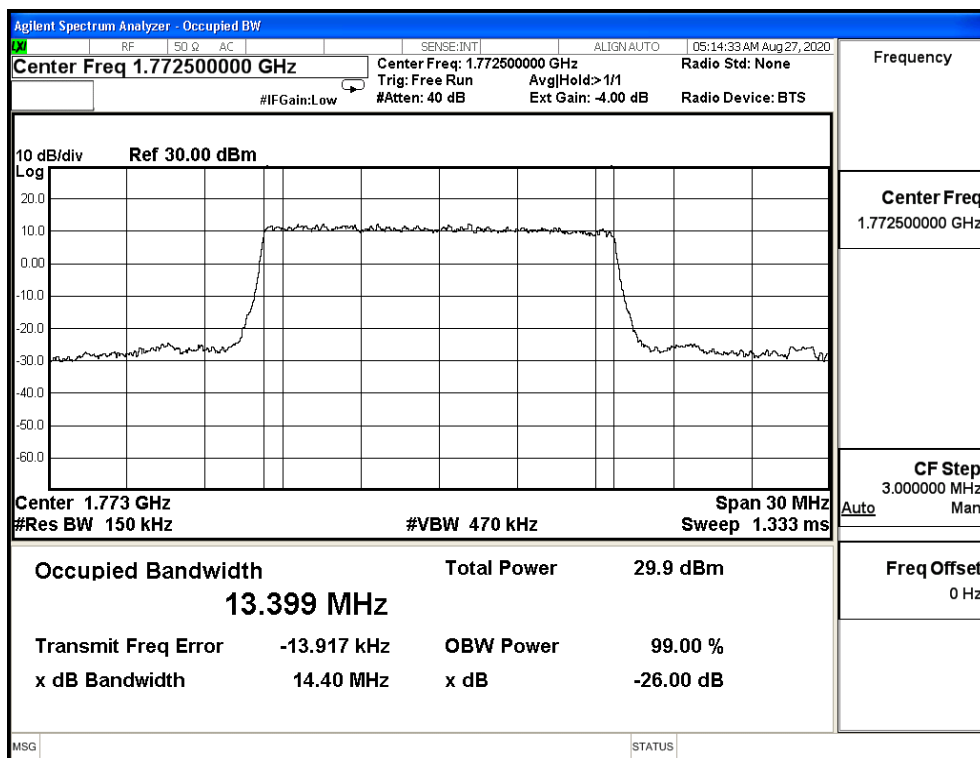


16QAM_CH132047_15M

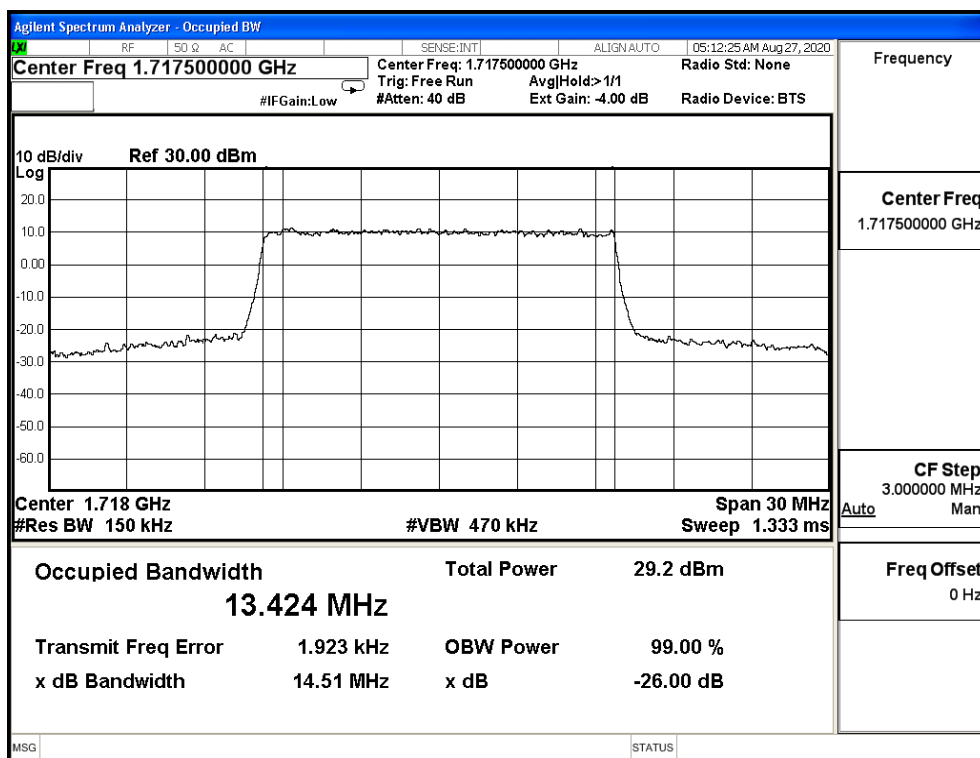


16QAM_CH132322_15M

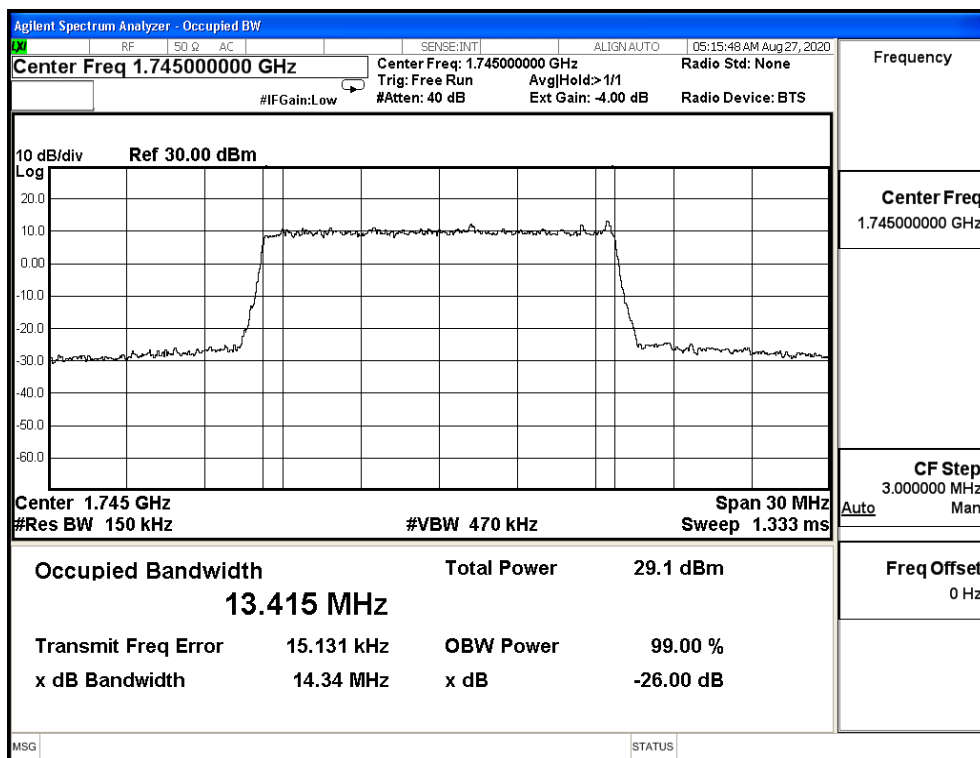


16QAM_CH132597_15M

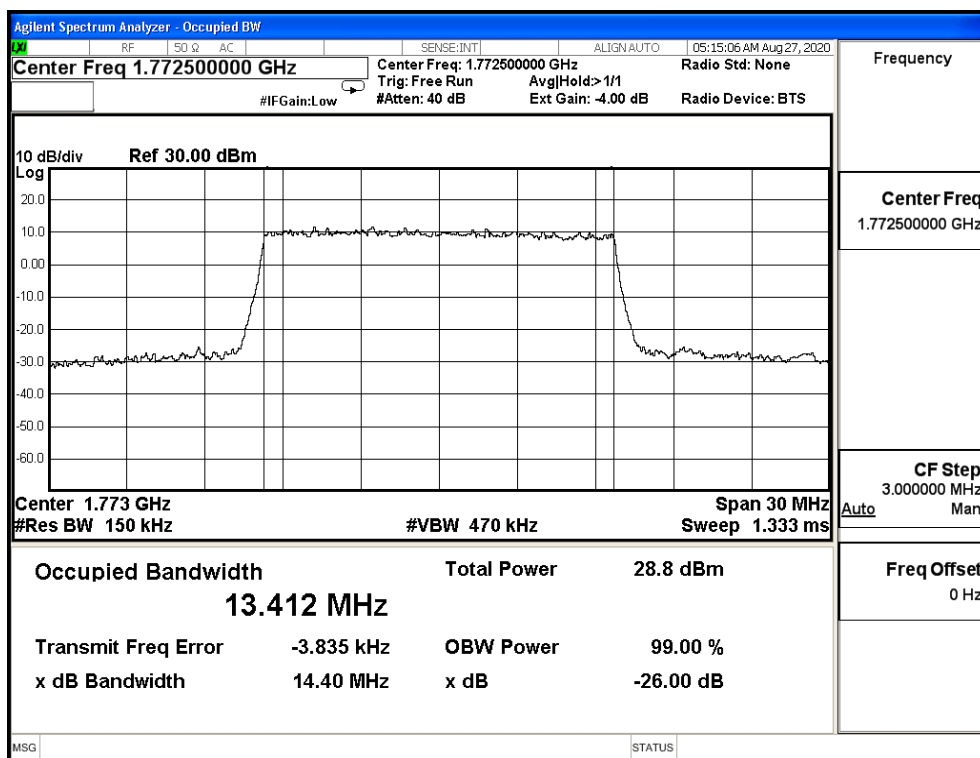


64QAM_CH132047_15M

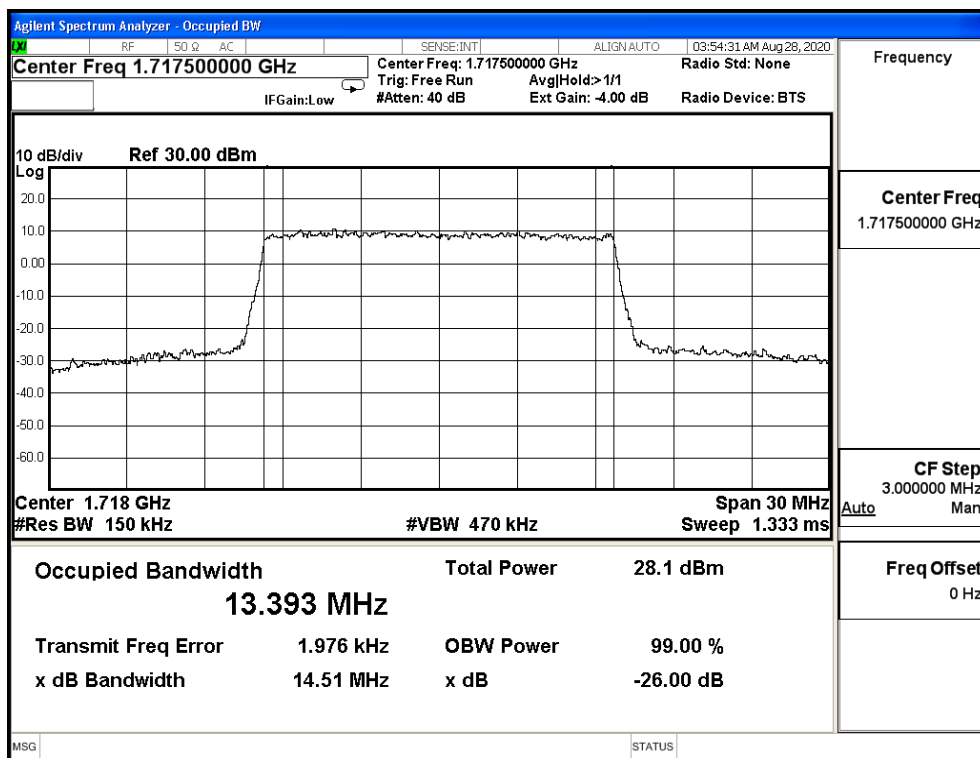


64QAM_CH132322_15M

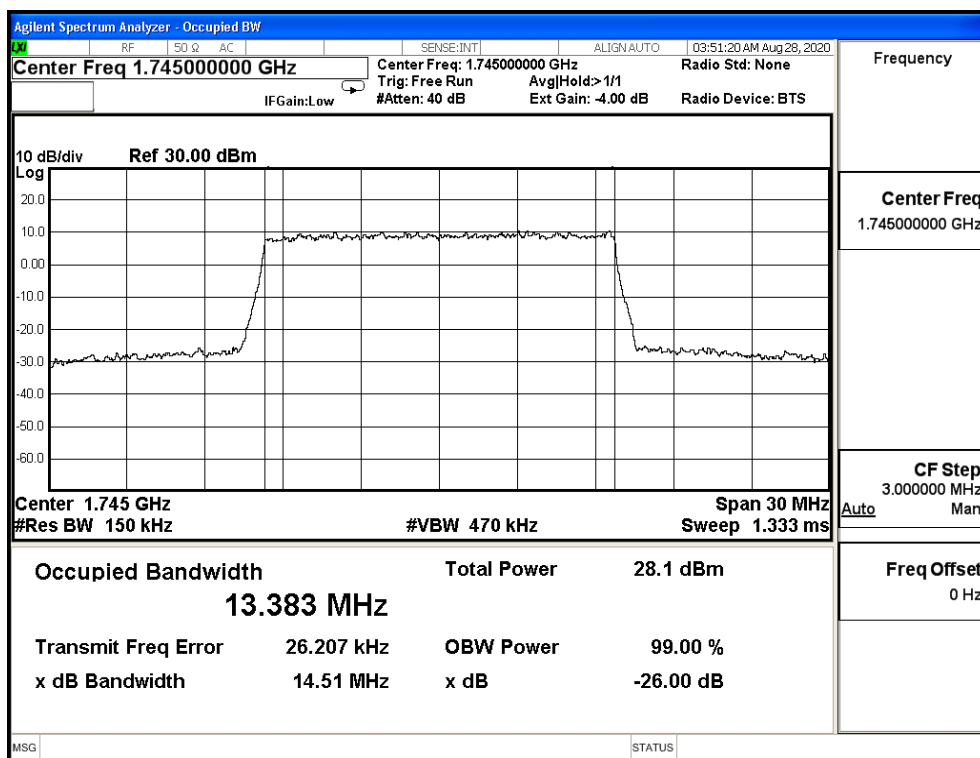


64QAM_CH132597_15M

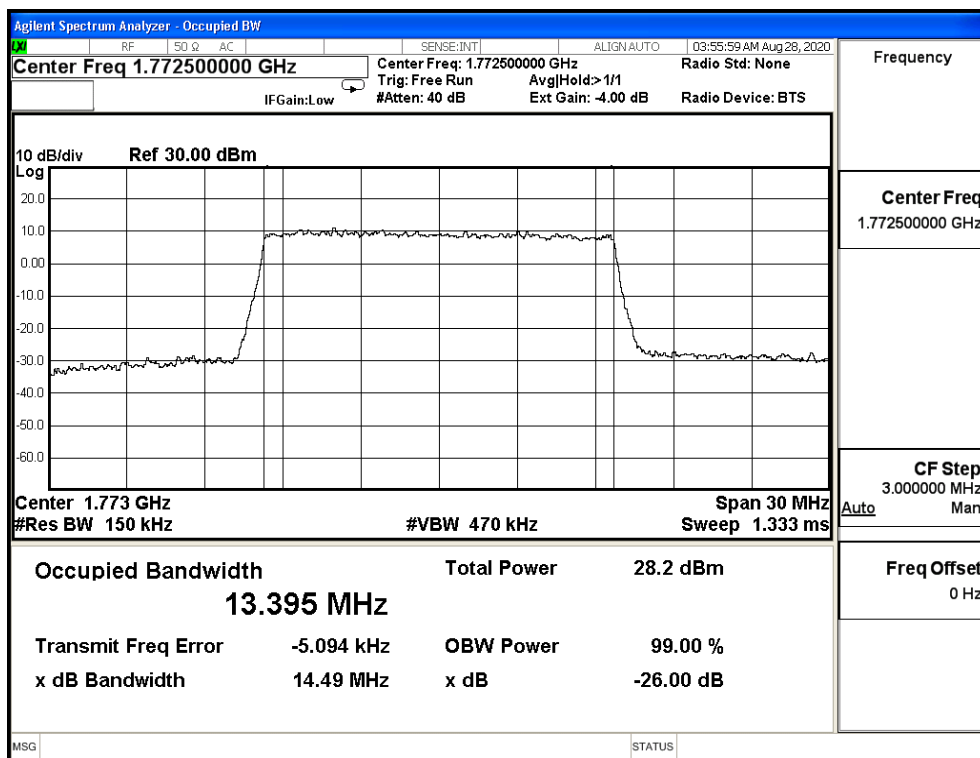


QPSK_CH132072_20M

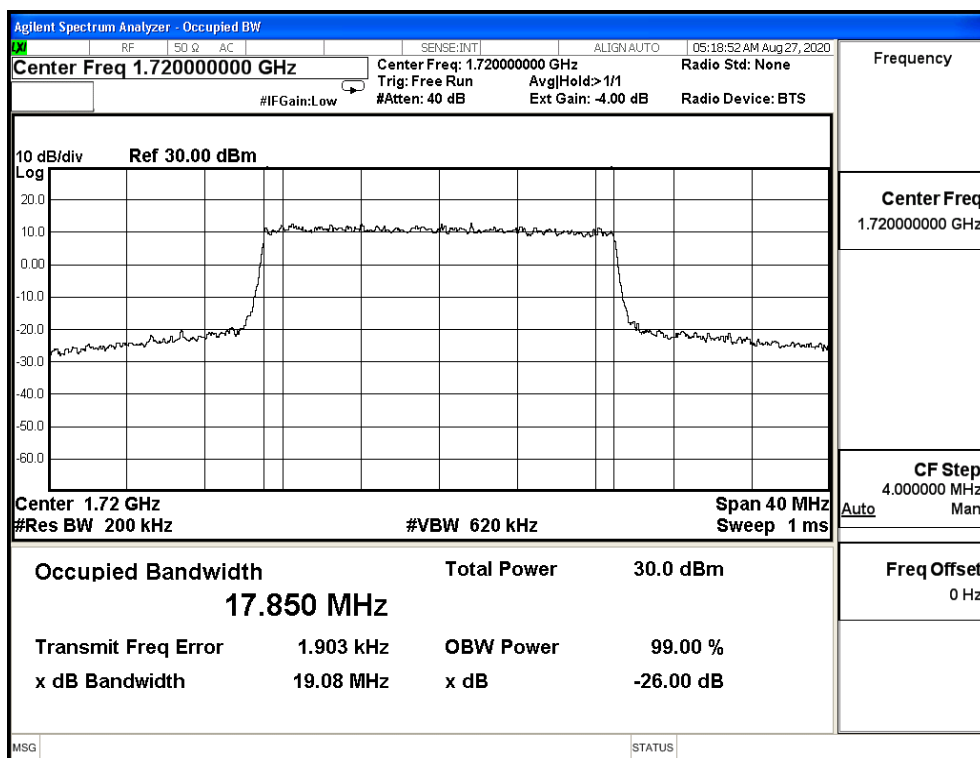


QPSK_CH132322_20M

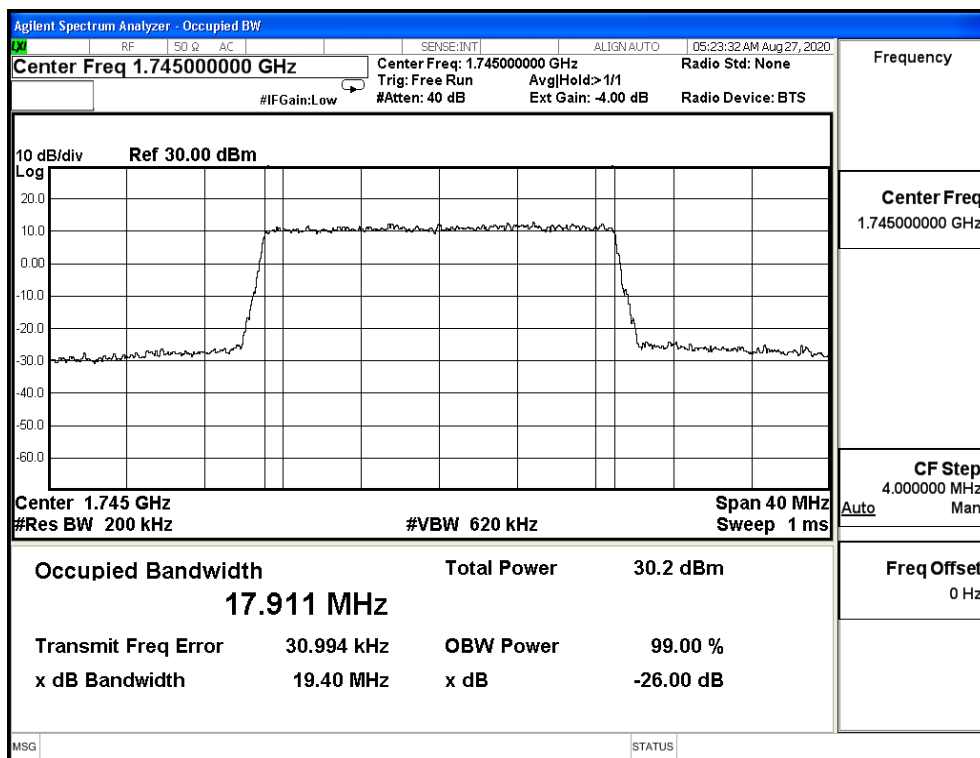


QPSK_CH132572_20M

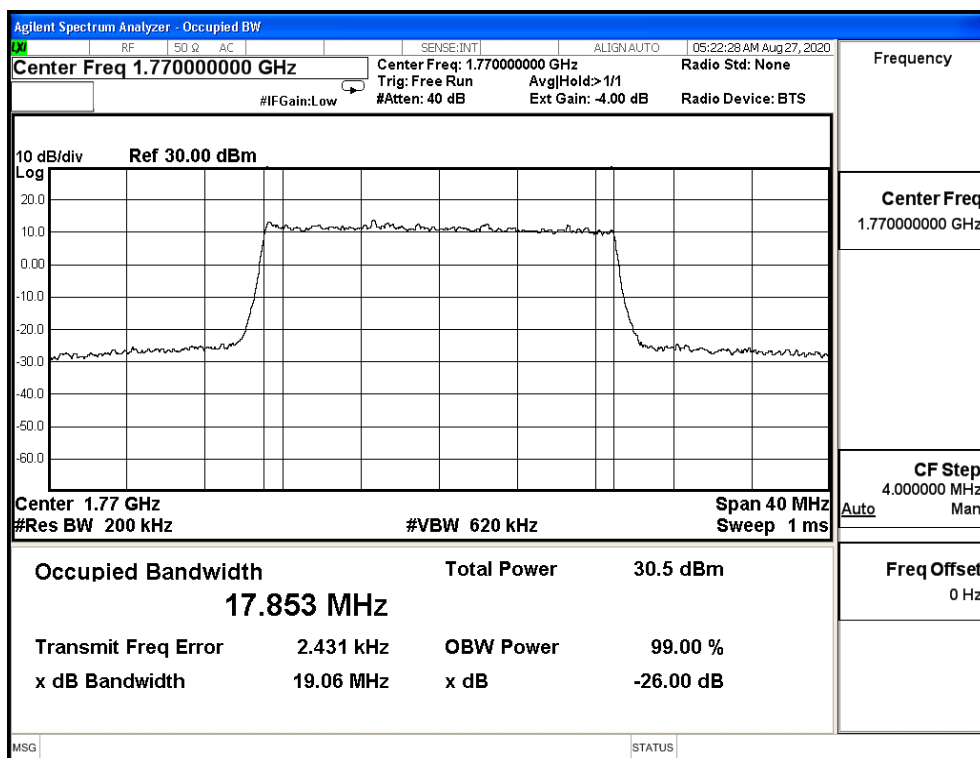


16QAM_CH132072_20M

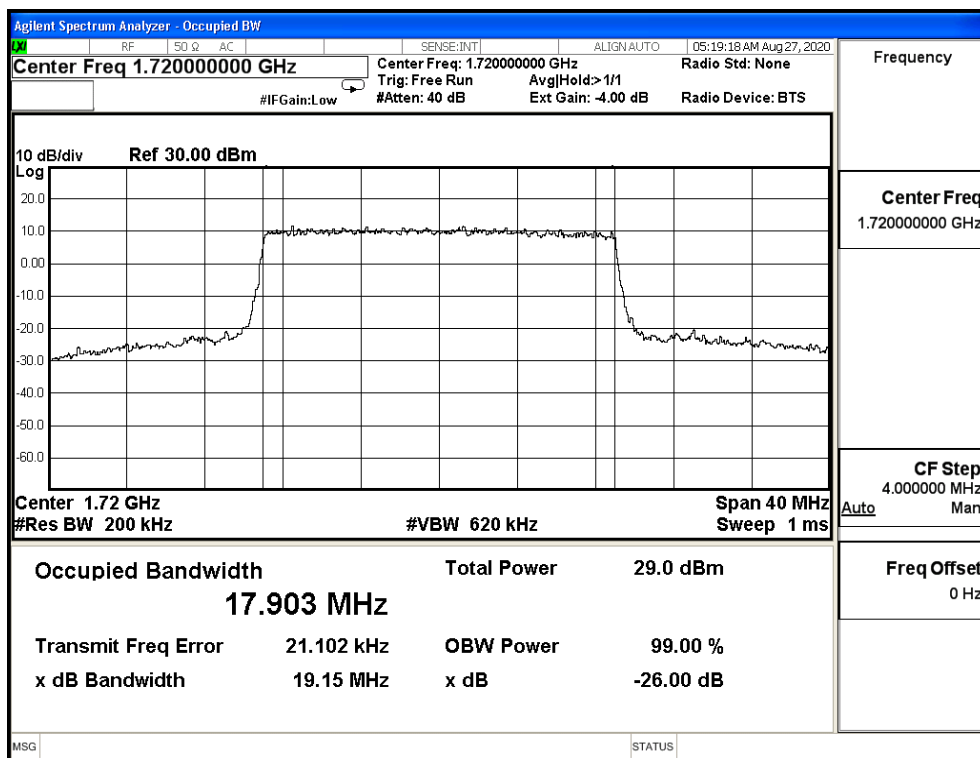


16QAM_CH132322_20M

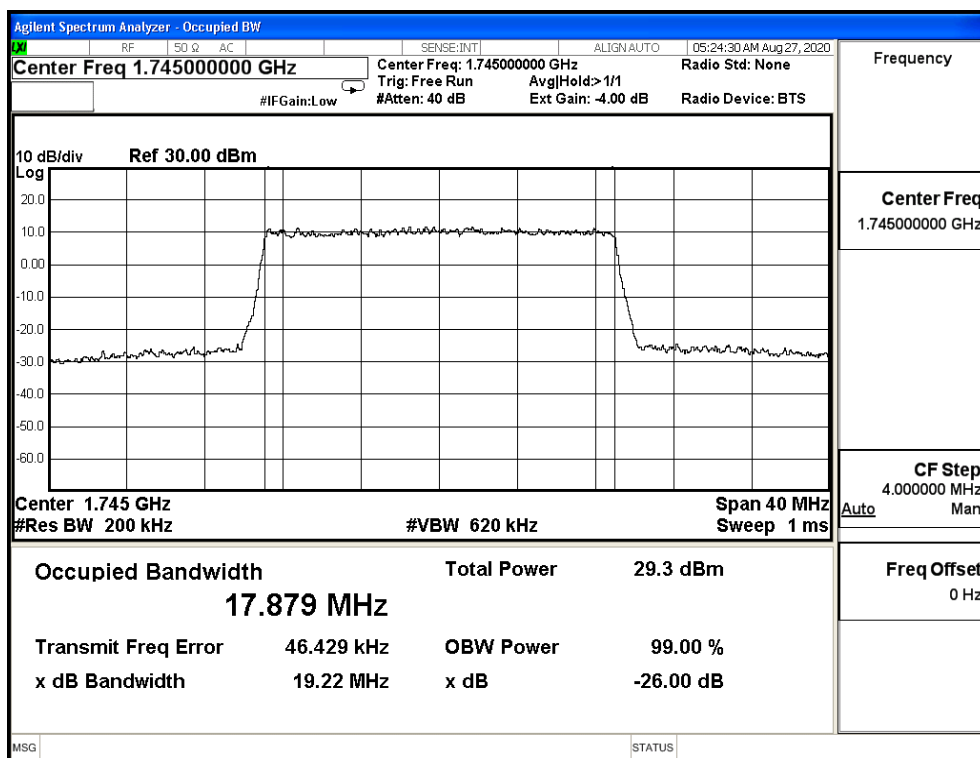


16QAM_CH132572_20M

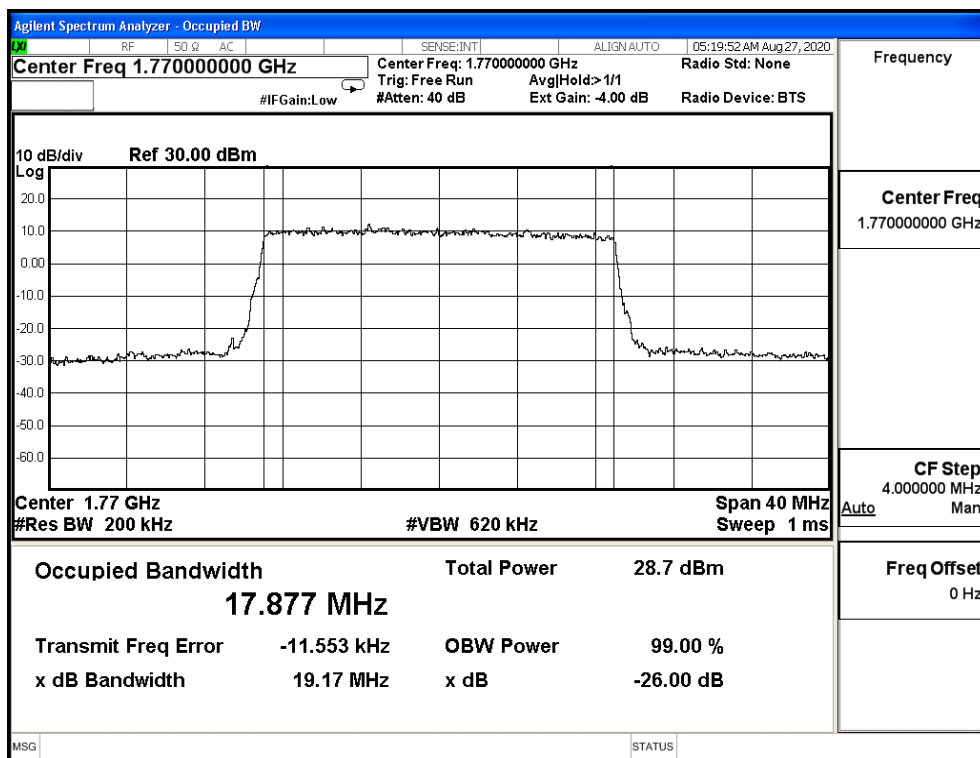


64QAM_CH132072_20M

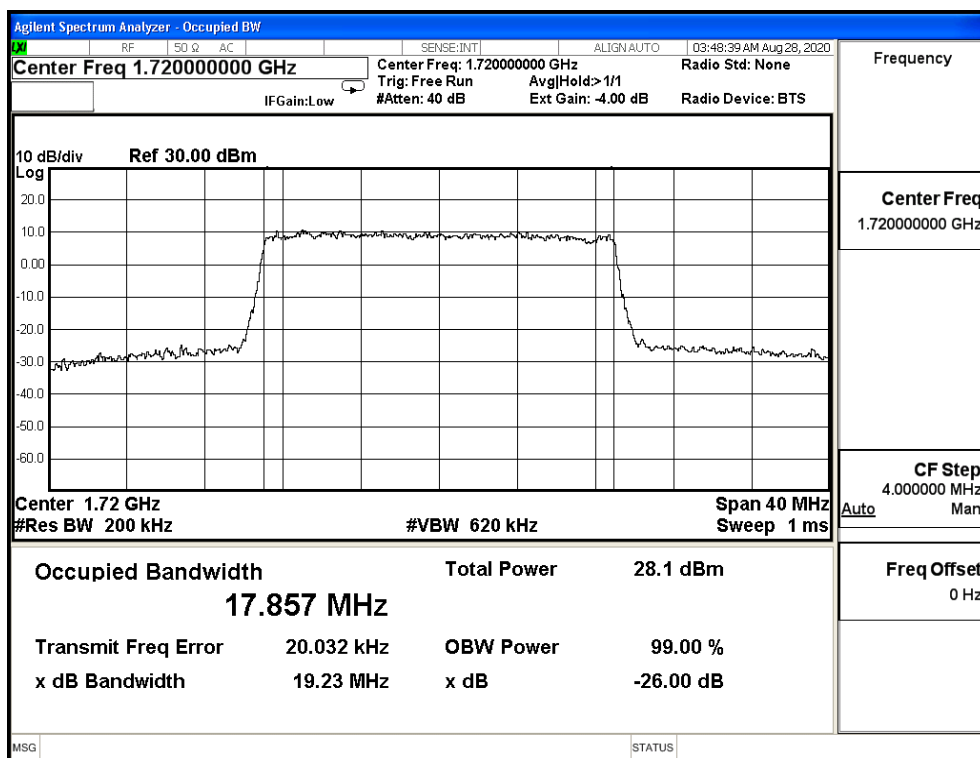

64QAM_CH132322_20M

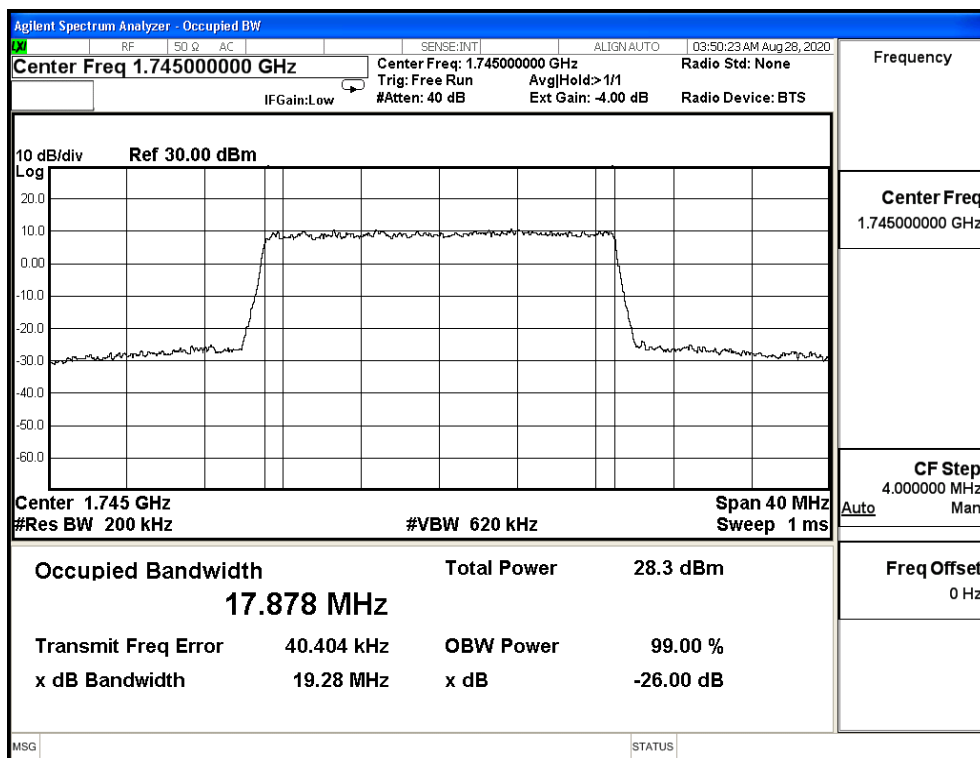

64QAM_CH132572_20M

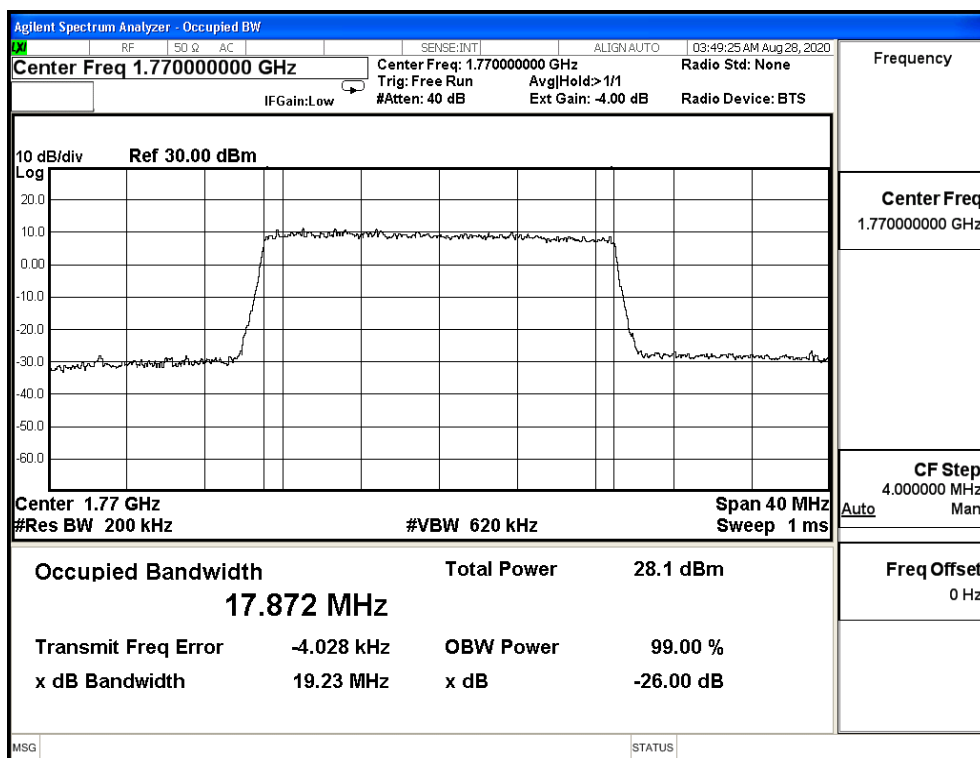


Product	Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 3: LTE Band 5/26 (Part 22)		
Date of Test	2020/09/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	60


Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
1.4M	QPSK	824.7	1.223	1.084	N/A
		836.5	1.217	1.090	N/A
		848.3	1.233	1.084	N/A
	16-QAM	824.7	1.237	1.087	N/A
		836.5	1.228	1.086	N/A
		848.3	1.215	1.084	N/A
	64-QAM	824.7	1.210	1.080	N/A
		836.5	1.214	1.080	N/A
		848.3	1.209	1.080	N/A
3M	QPSK	825.5	2.955	2.688	N/A
		836.5	2.940	2.685	N/A
		847.5	2.931	2.685	N/A
	16-QAM	825.5	2.961	2.684	N/A
		836.5	2.969	2.685	N/A
		847.5	2.943	2.684	N/A
	64-QAM	825.5	2.924	2.684	N/A
		836.5	2.919	2.683	N/A
		847.5	2.929	2.684	N/A
5M	QPSK	826.5	4.901	4.486	N/A
		836.5	4.891	4.468	N/A
		846.5	4.903	4.485	N/A
	16-QAM	826.5	4.835	4.473	N/A
		836.5	4.892	4.475	N/A
		846.5	4.911	4.489	N/A
	64-QAM	826.5	4.901	4.481	N/A
		836.5	4.897	4.483	N/A
		846.5	4.871	4.485	N/A

Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
10M	QPSK	829	9.657	8.953	N/A
		836.5	9.711	8.944	N/A
		844	9.678	8.945	N/A
	16-QAM	829	9.676	8.963	N/A
		836.5	9.600	8.937	N/A
		844	9.650	8.950	N/A
	64-QAM	829	9.640	8.950	N/A
		836.5	9.579	8.932	N/A
		844	9.628	8.941	N/A
15M	QPSK	831.5	14.590	13.452	N/A
		836.5	14.510	13.393	N/A
		841.5	14.370	13.384	N/A
	16-QAM	831.5	14.510	13.439	N/A
		836.5	14.370	13.390	N/A
		841.5	14.390	13.384	N/A
	64-QAM	831.5	14.550	13.427	N/A
		836.5	14.470	13.380	N/A
		841.5	14.470	13.380	N/A


QPSK_CH26797_1.4M

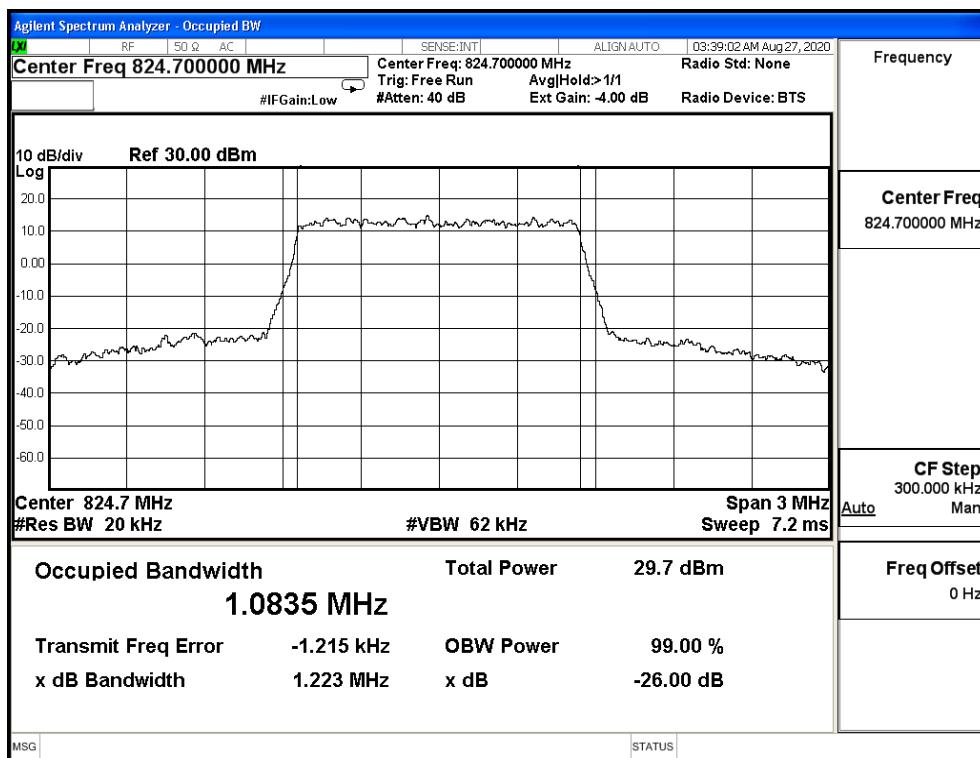


QPSK_CH26915_1.4M

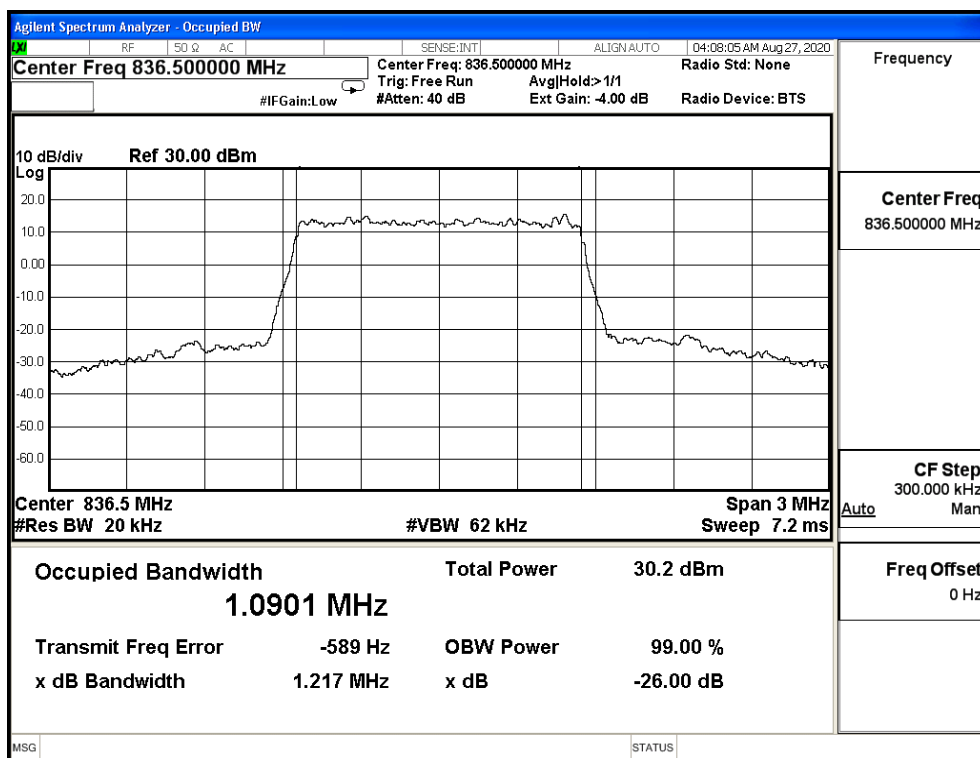


_QPSK_CH27033_1.4M

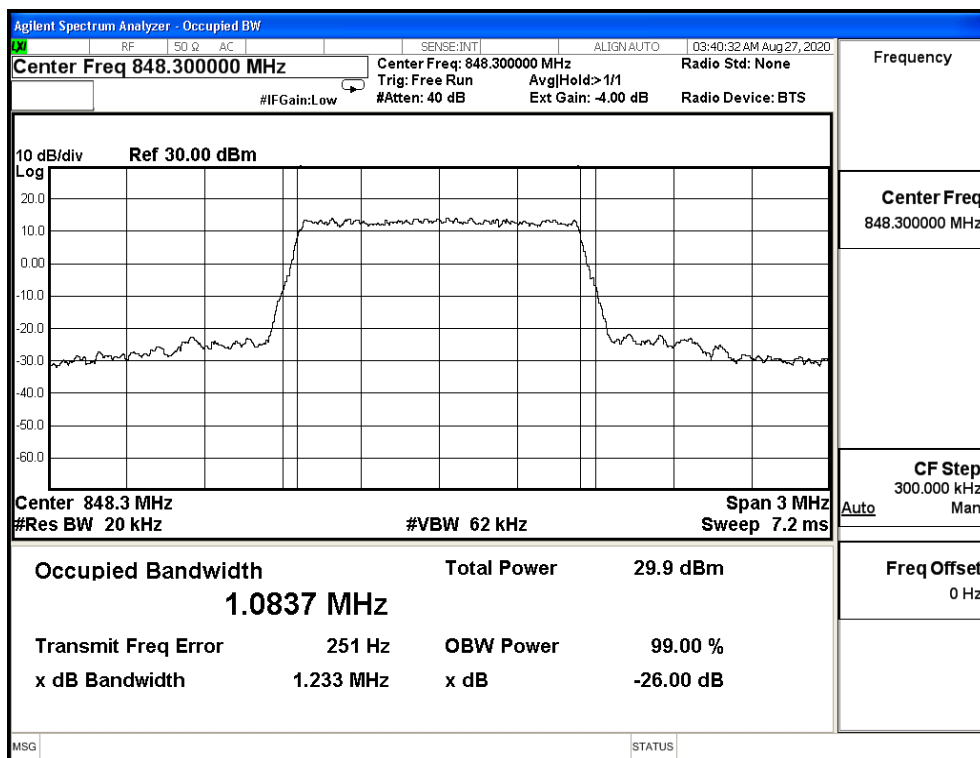


16QAM_CH26797_1.4M

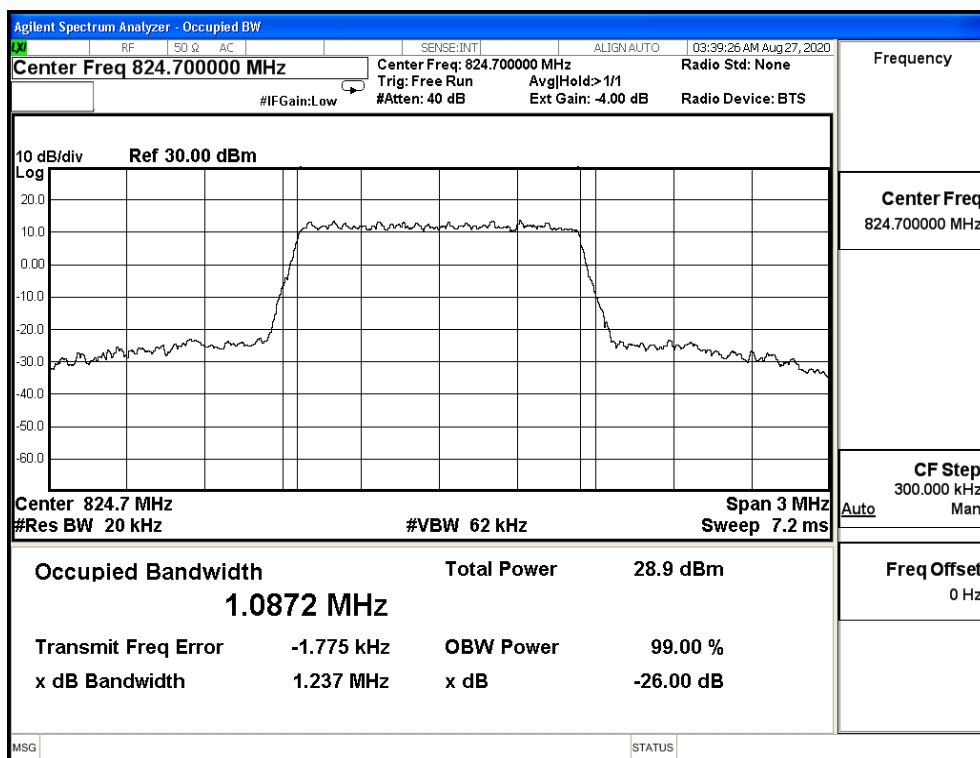

16QAM_CH26915_1.4M

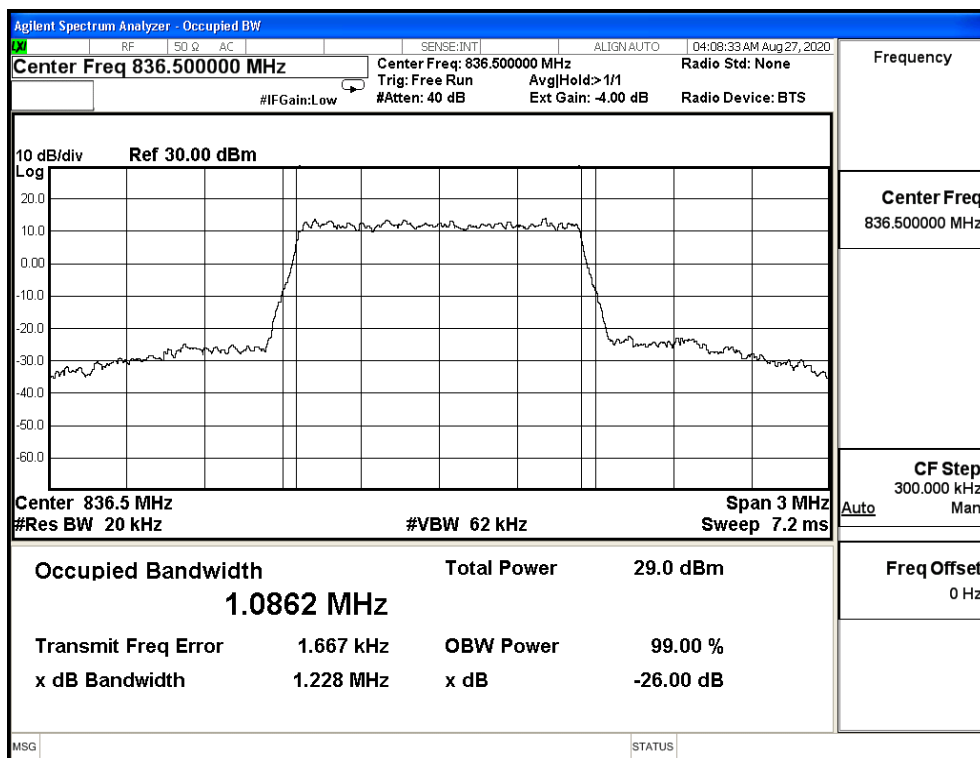

16QAM_CH27033_1.4M

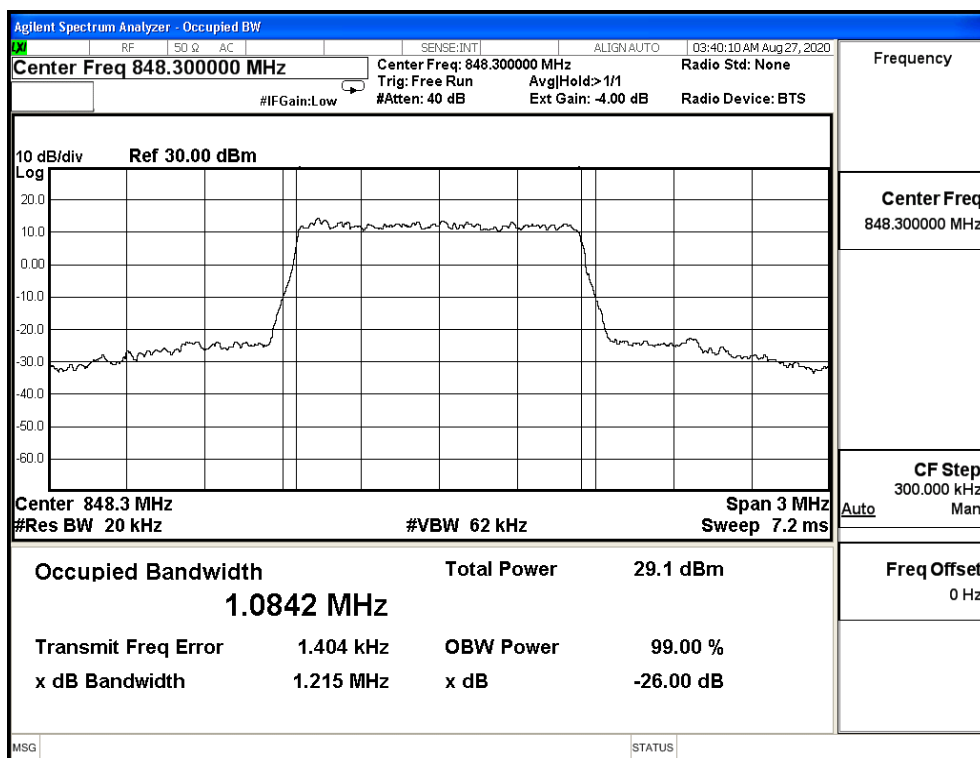

Agilent Spectrum Analyzer - Occupied BW

RF 50 Ω AC SENSE:INT ALIGN: AUTO 05:30:31 AM Aug 28, 2020

Center Freq 824.700000 MHz Center Freq: 824.700000 MHz Radio Std: None
 Trig: Free Run Avg/Hold: 1/1
 #Atten: 40 dB Ext Gain: -4.00 dB Radio Device: BTS

IF Gain: Low

10 dB/div Ref 30.00 dBm

Log

Center 824.7 MHz Span 3 MHz
 #Res BW 15 kHz #VBW 47 kHz Sweep 12.73 ms

Occupied Bandwidth 1.0797 MHz Total Power 27.8 dBm

Transmit Freq Error 628 Hz OBW Power 99.00 %
 x dB Bandwidth 1.210 MHz x dB -26.00 dB

Frequency 824.700000 MHz

CF Step 300.000 kHz Man
 Auto

Freq Offset 0 Hz

MSG STATUS

Agilent Spectrum Analyzer - Occupied BW

RF SQ AC SENSE:INT ALIGN AUTO 05:28:44 AM Aug 28, 2020

Center Freq 836.500000 MHz Center Freq: 836.500000 MHz Radio Std: None
 Trig: Free Run Avg/Hold: 1/1
 #Atten: 40 dB Ext Gain: -4.00 dB Radio Device: BTS

IF Gain: Low

10 dB/div Ref 30.00 dBm

Log

Center 836.5 MHz Span 3 MHz
 #Res BW 15 kHz #VBW 47 kHz Sweep 12.73 ms

Occupied Bandwidth 1.0795 MHz Total Power 28.1 dBm

Transmit Freq Error 1.089 kHz OBW Power 99.00 %
 x dB Bandwidth 1.214 MHz x dB -26.00 dB

Frequency 836.500000 MHz


CF Step 300.000 kHz Man

Auto


Freq Offset 0 Hz

MSG STATUS


64QAM_CH27033_1.4M

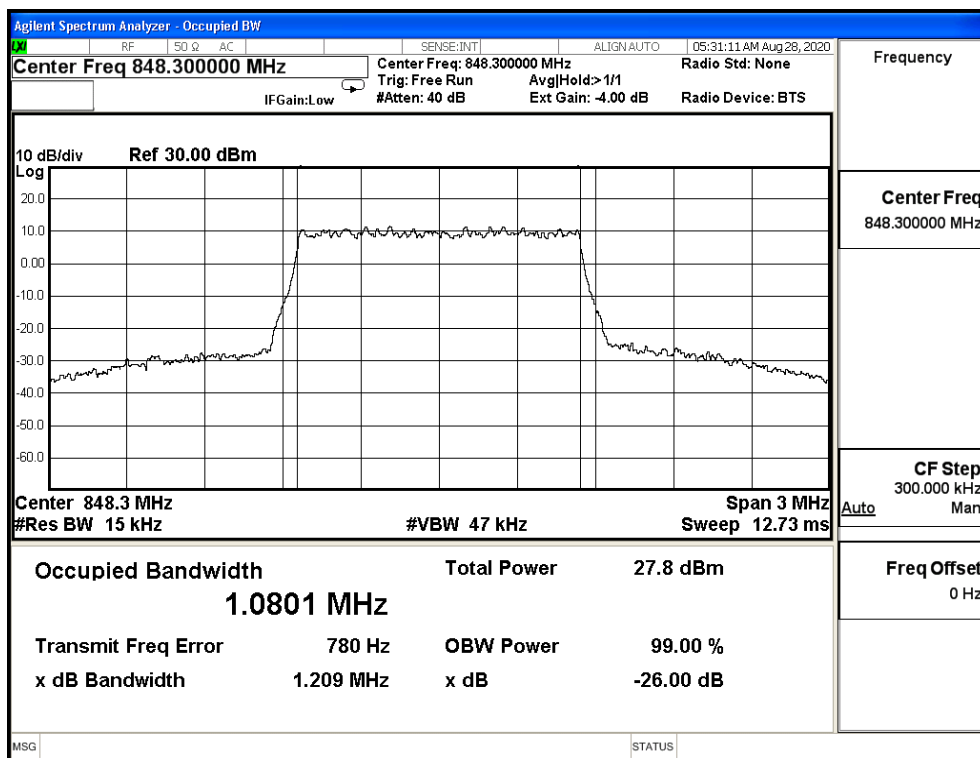


QPSK_CH26805_3M

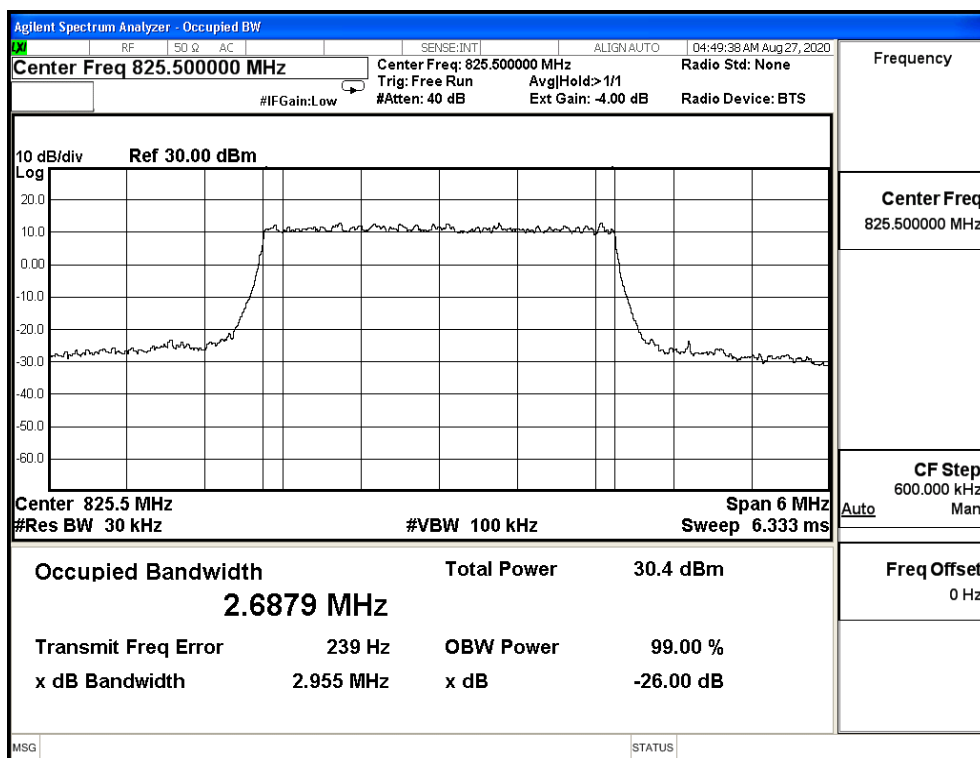


QPSK_CH26915_3M

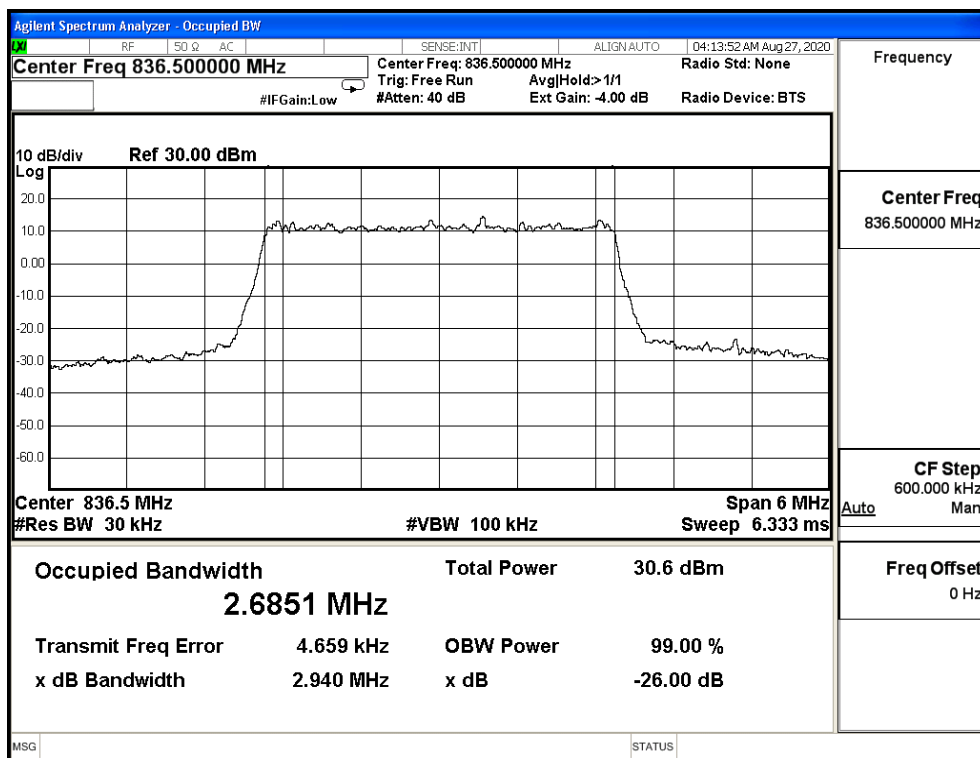


QPSK_CH27025_3M

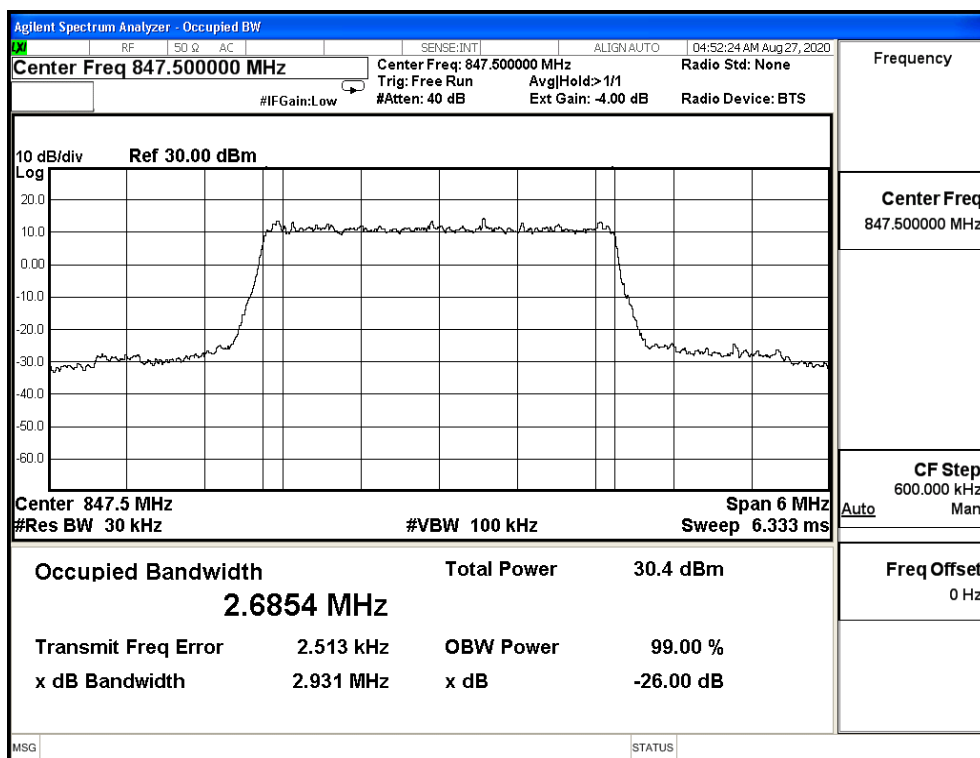


16QAM_CH26805_3M

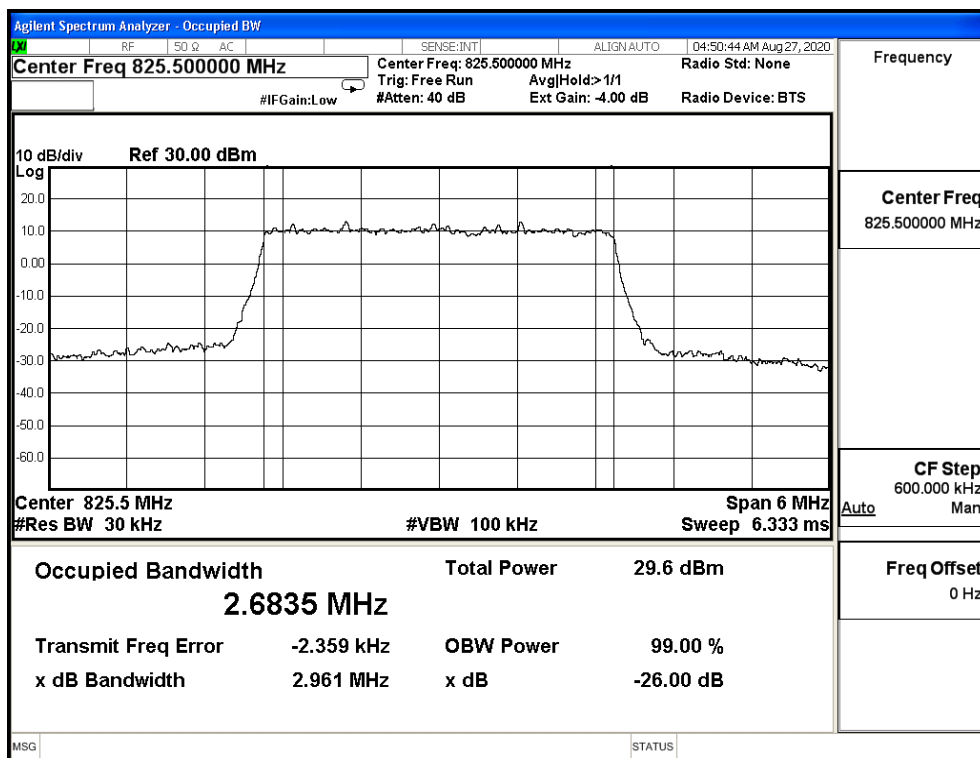


16QAM_CH26915_3M

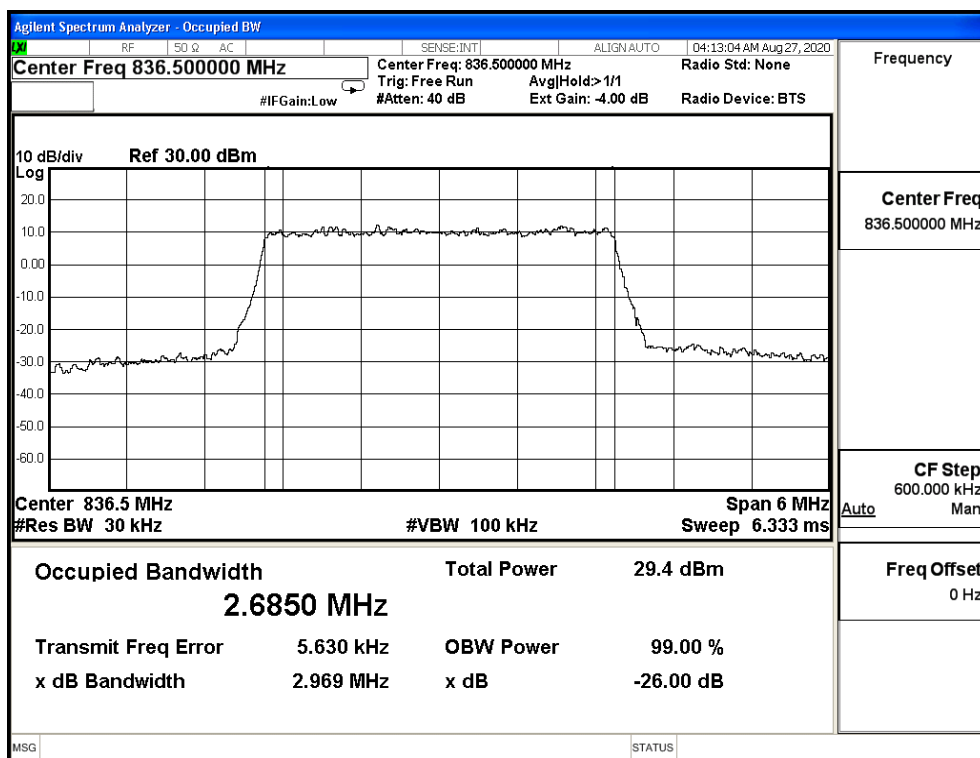


16QAM_CH27025_3M

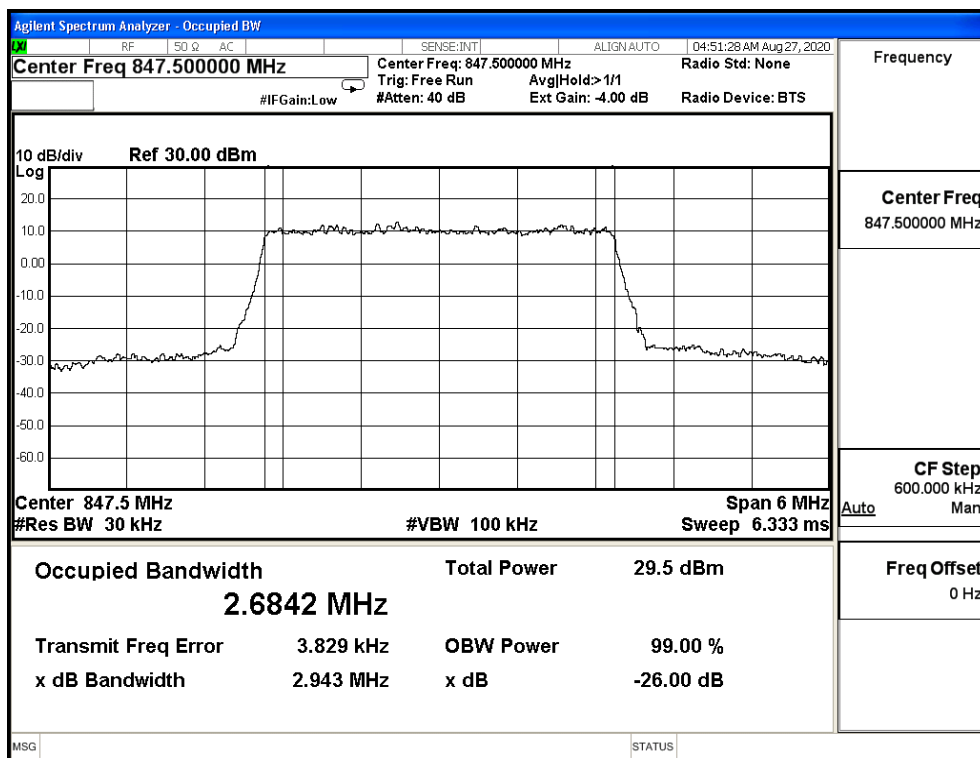


64QAM_CH26805_3M

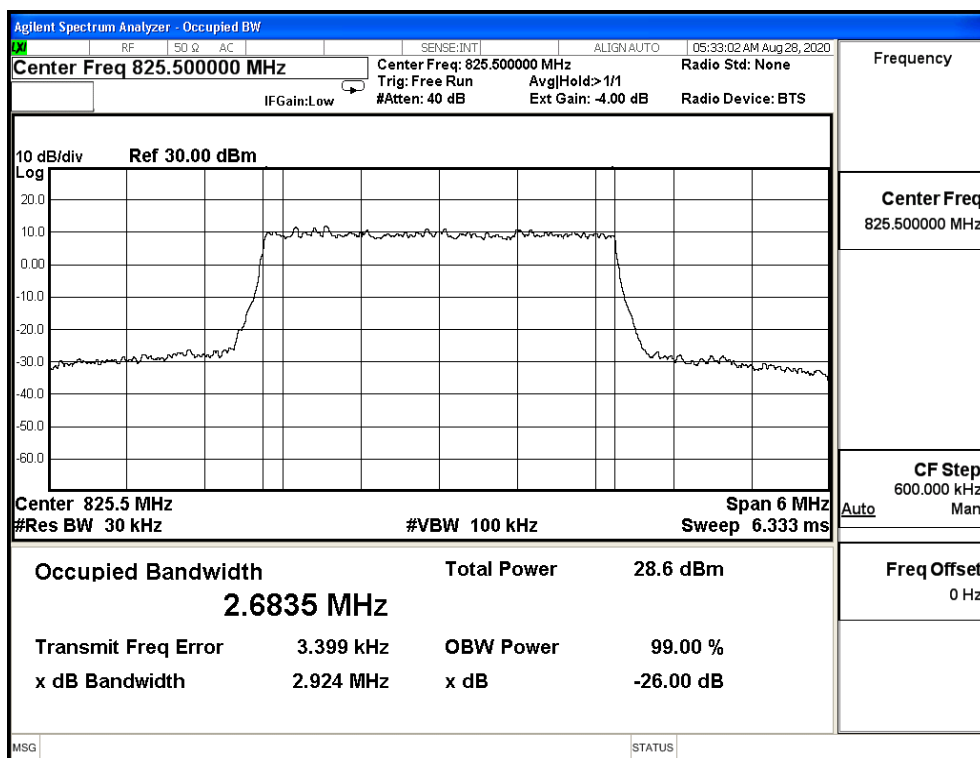


64QAM_CH26915_3M

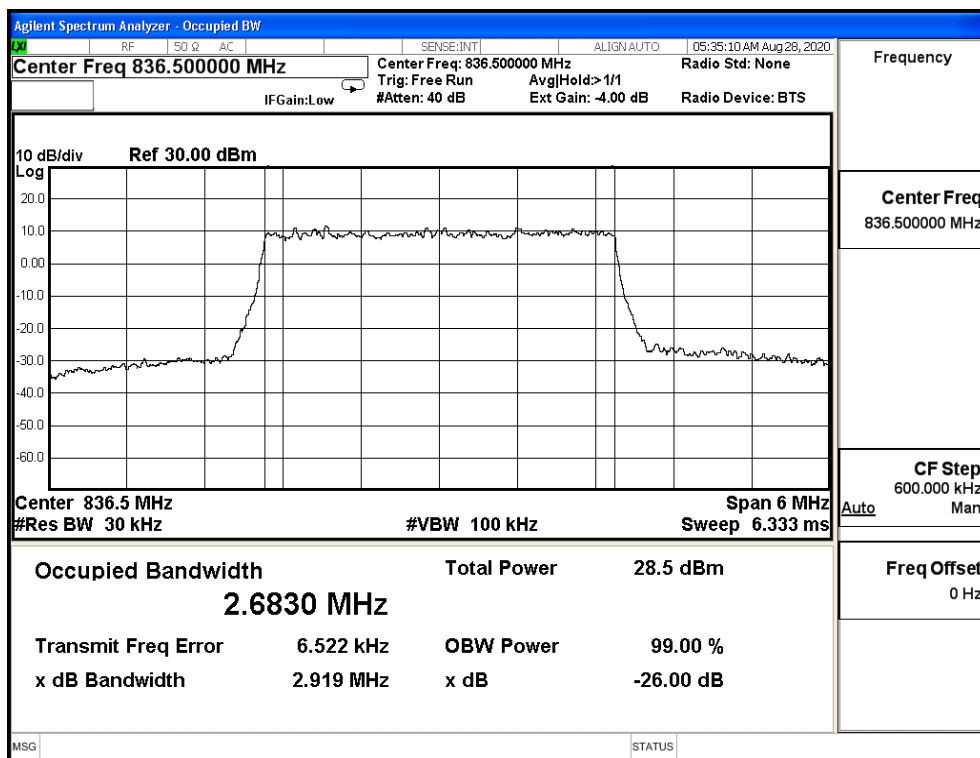


64QAM_CH27025_3M

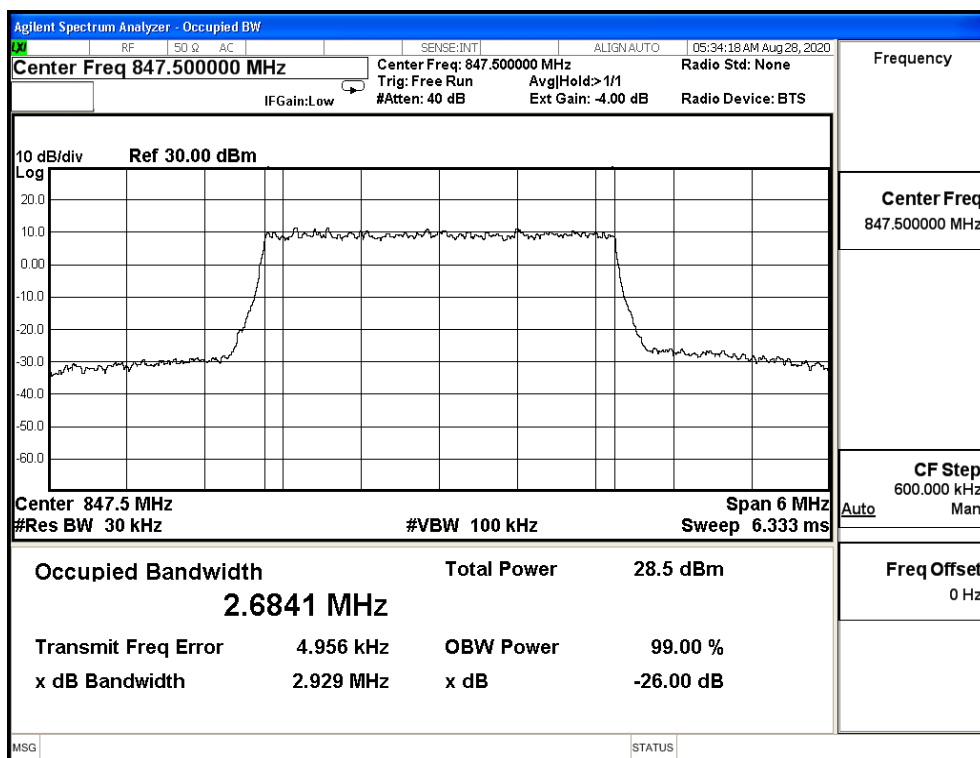


QPSK_CH26815_5M

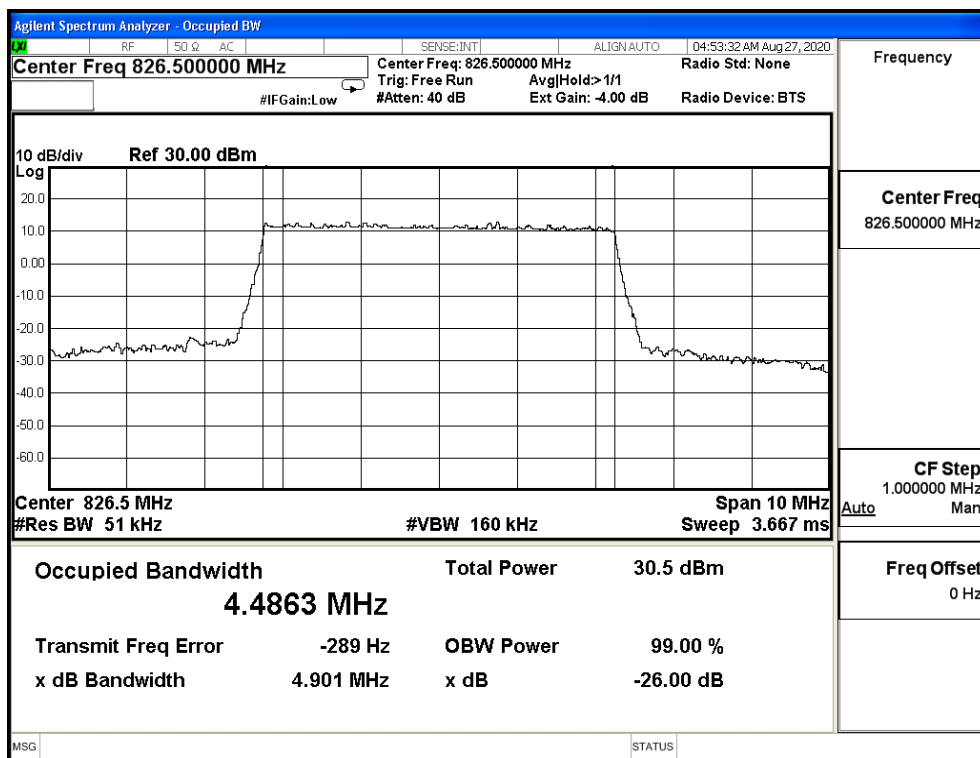


QPSK_CH26915_5M

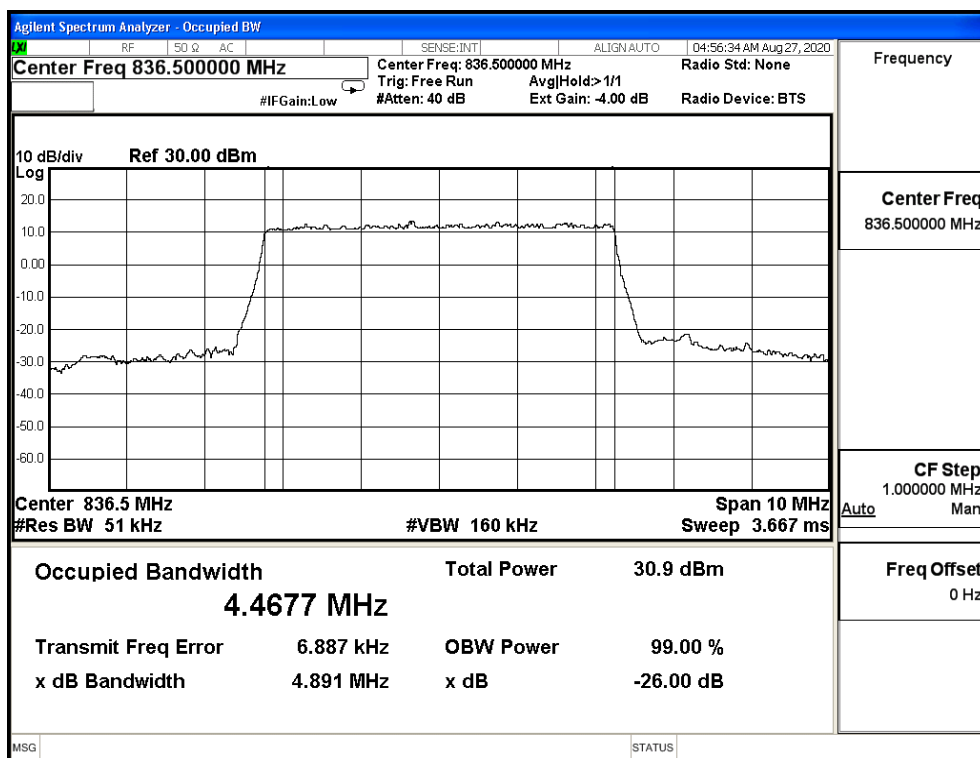


QPSK_CH27015_5M

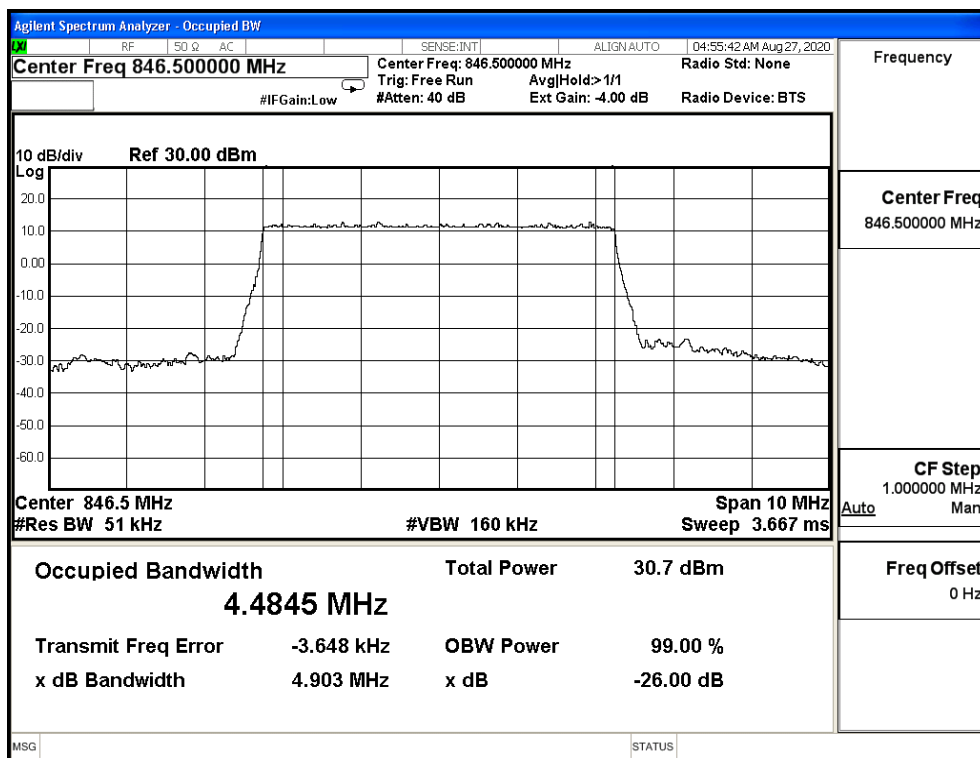


16QAM_CH26815_5M

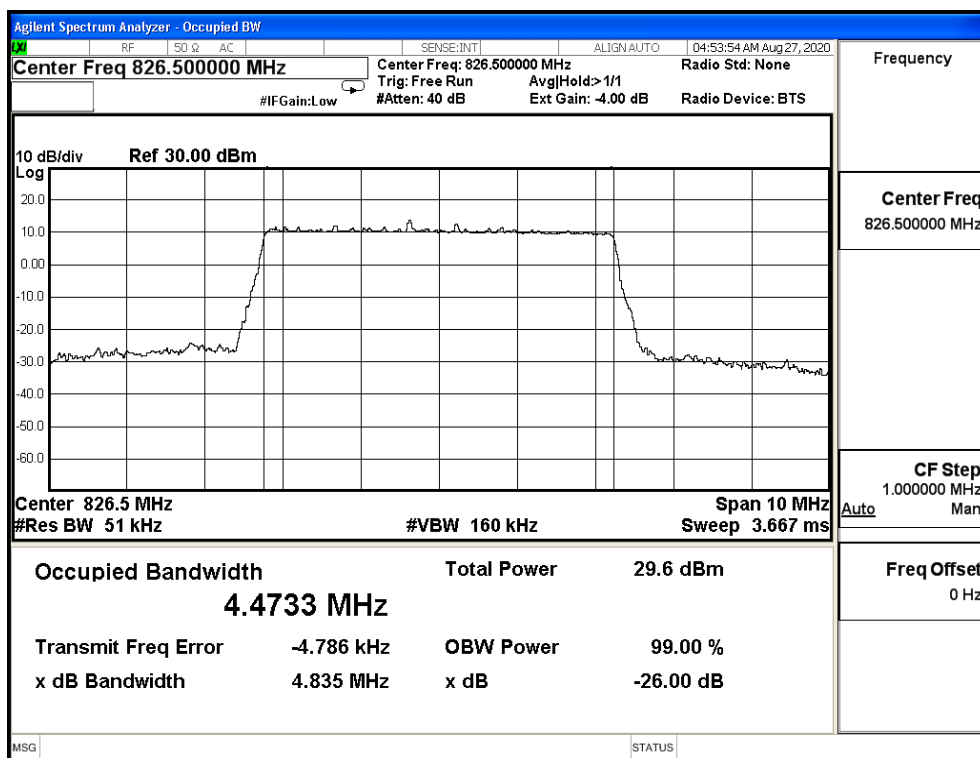


16QAM_CH26915_5M

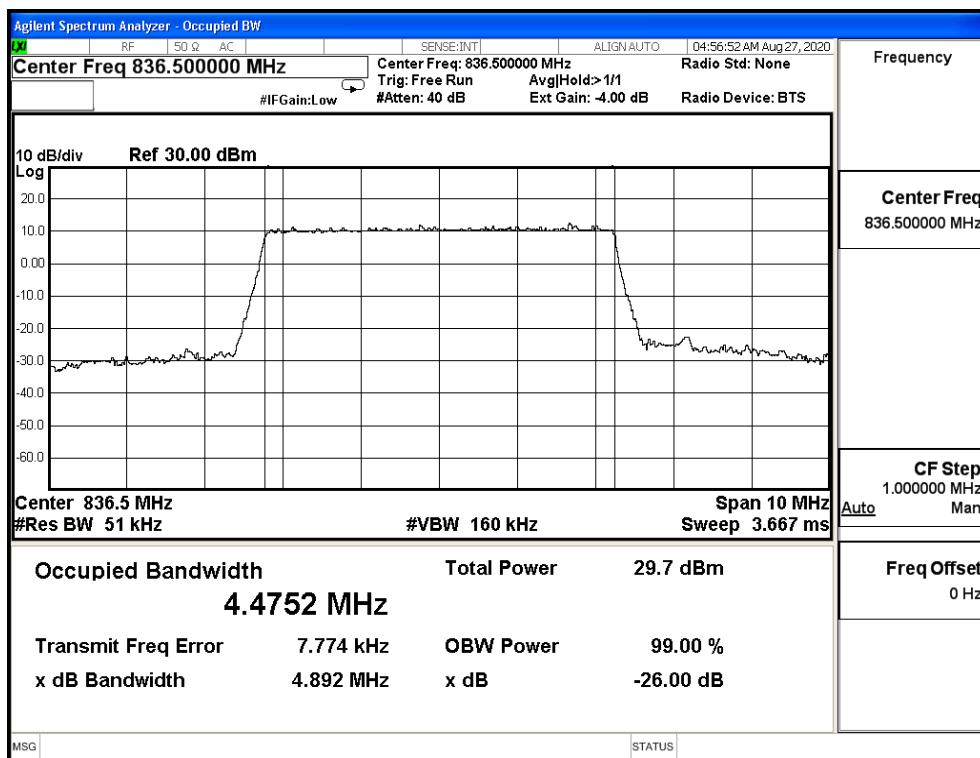


16QAM_CH27015_5M

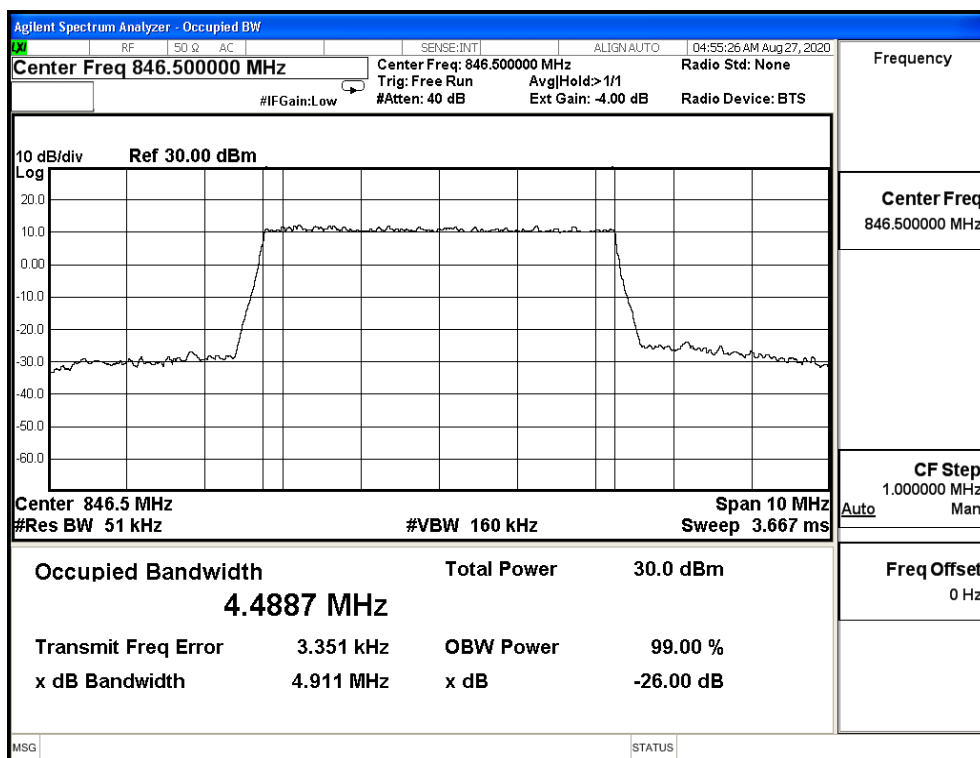


64QAM_CH26815_5M

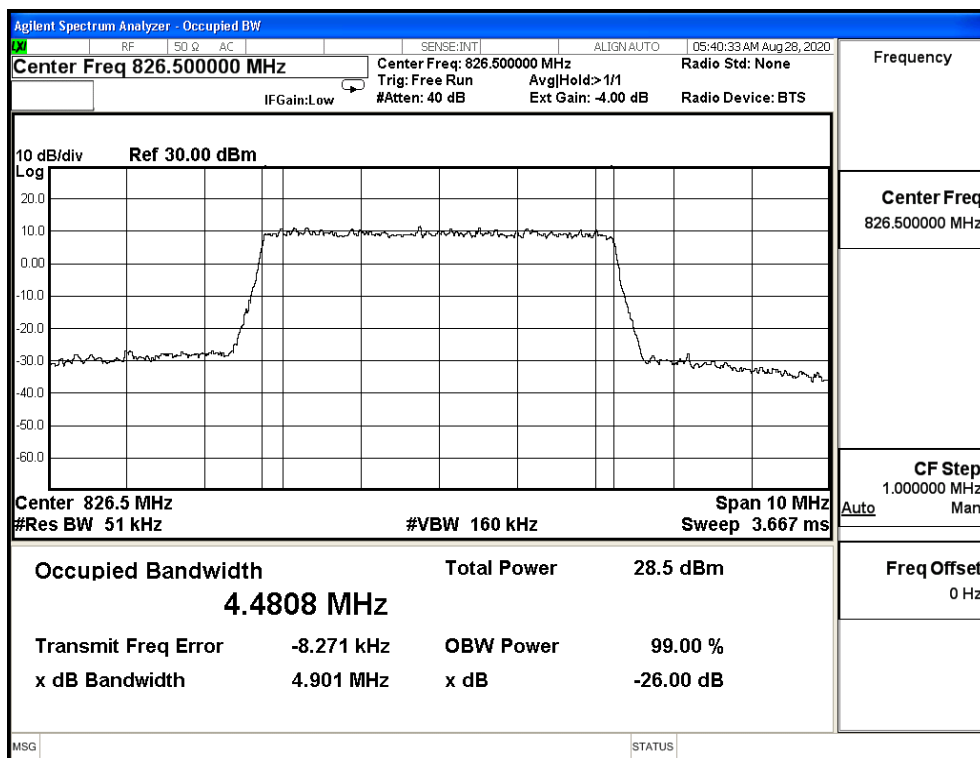


64QAM_CH26915_5M

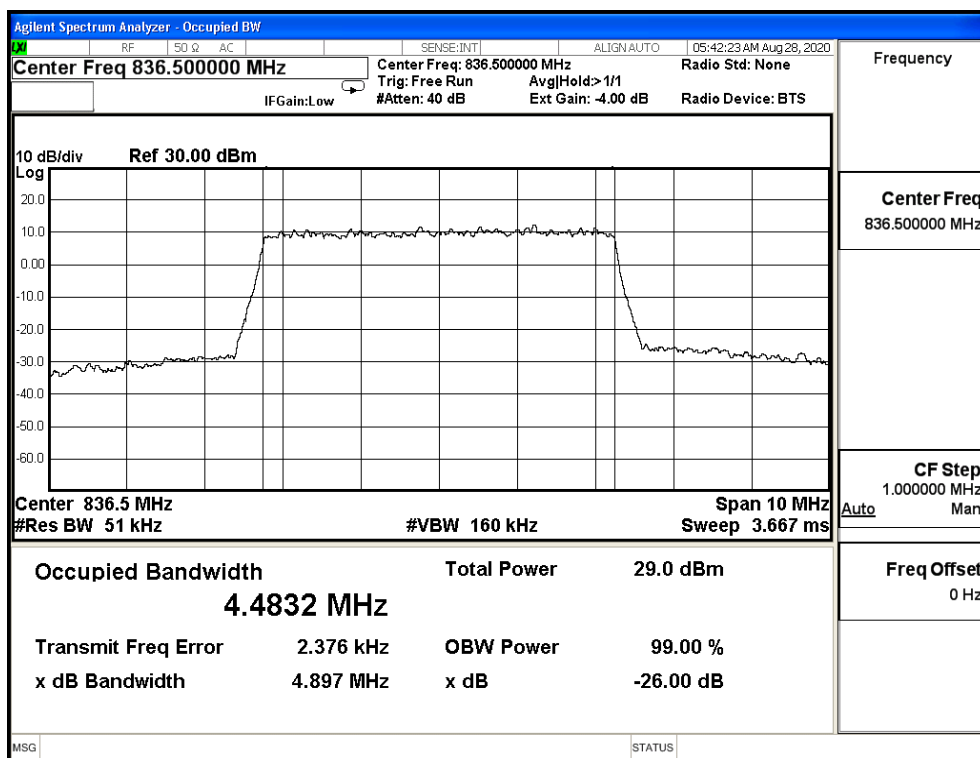


64QAM_CH27015_5M

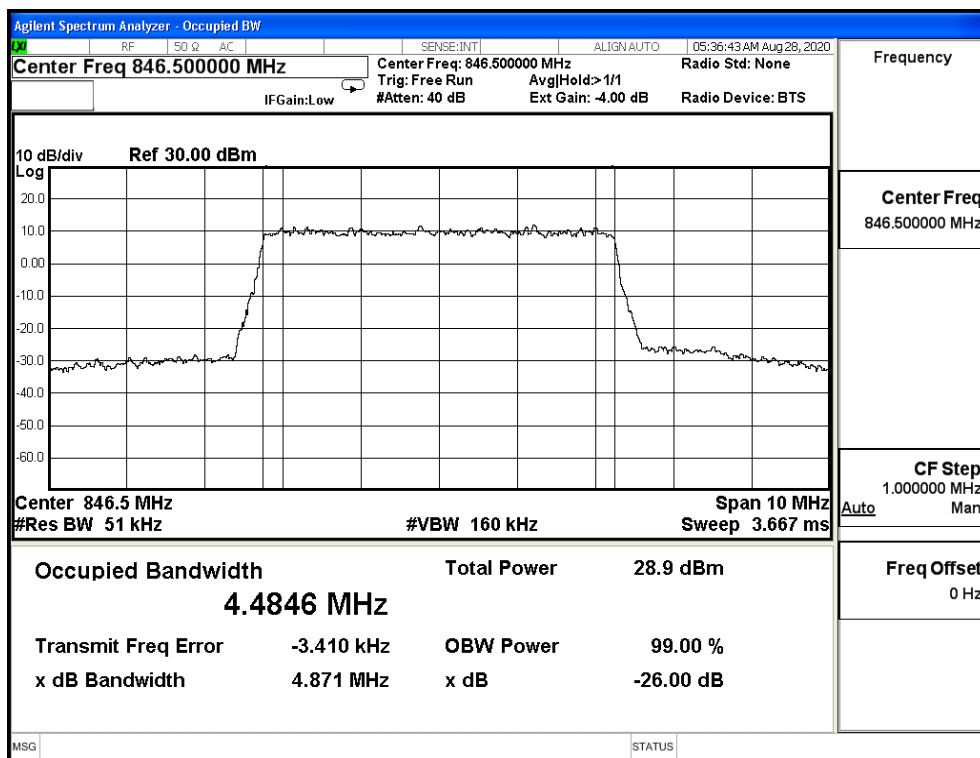


QPSK_CH26840_10M

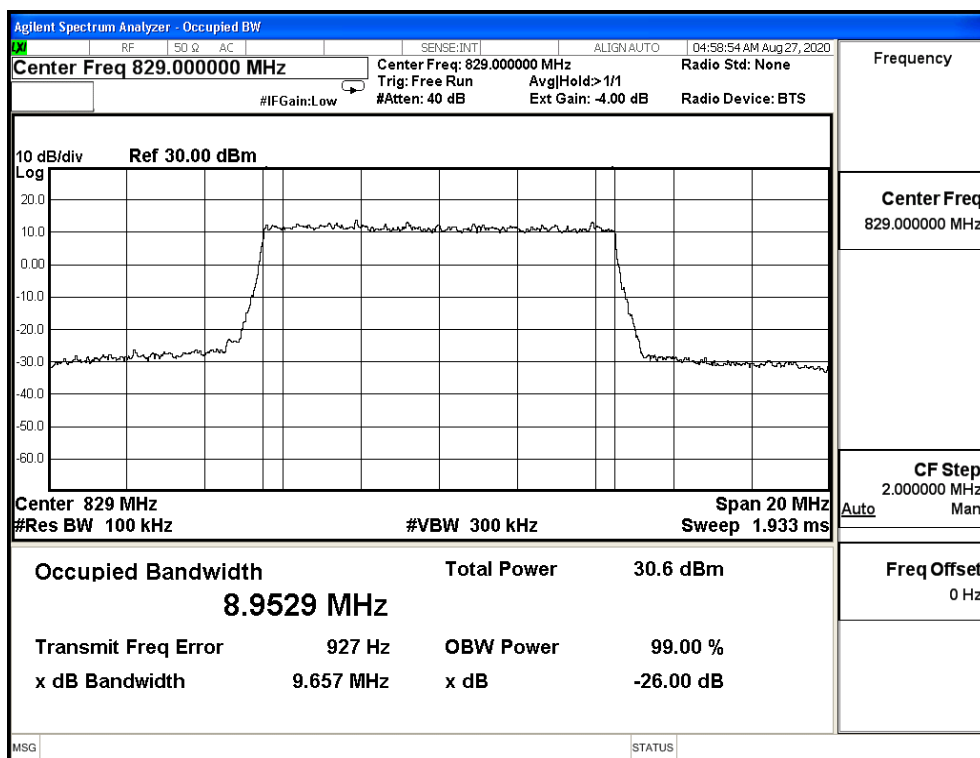


QPSK_CH26915_10M

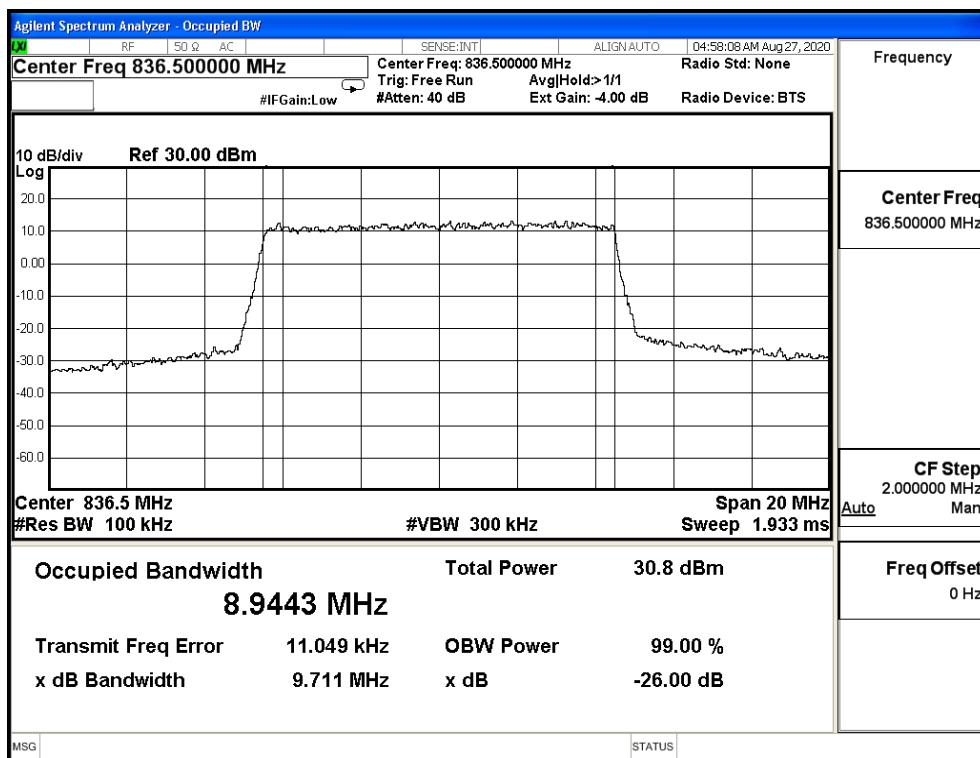


QPSK_CH26990_10M

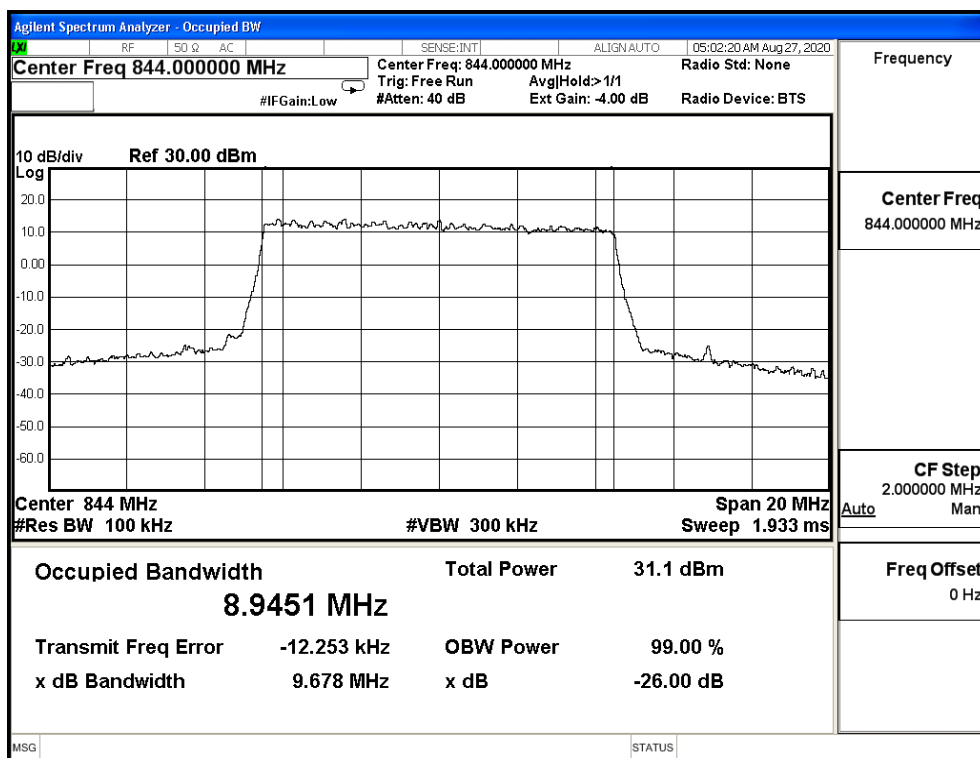


16QAM_CH26840_10M

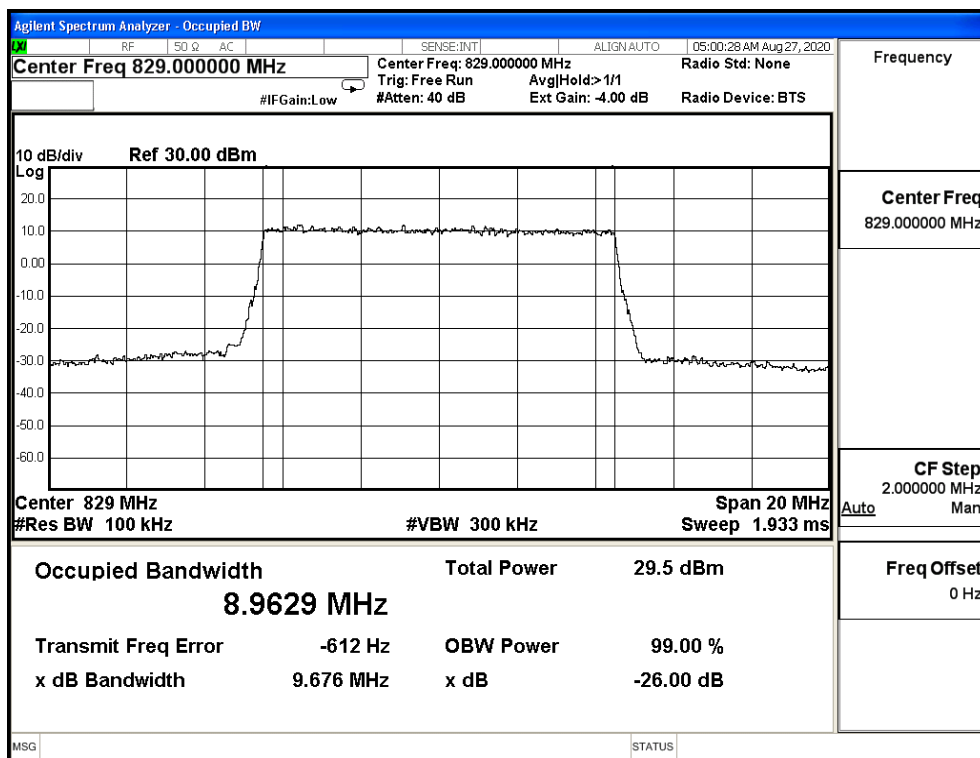


16QAM_CH26915_10M

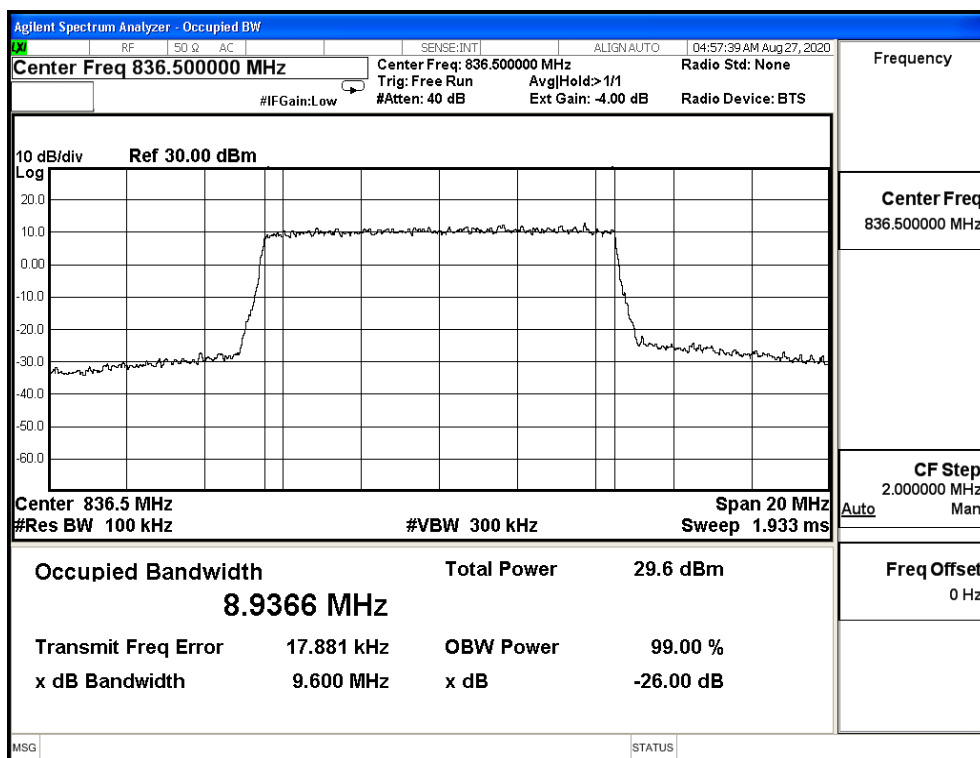


16QAM_CH26990_10M

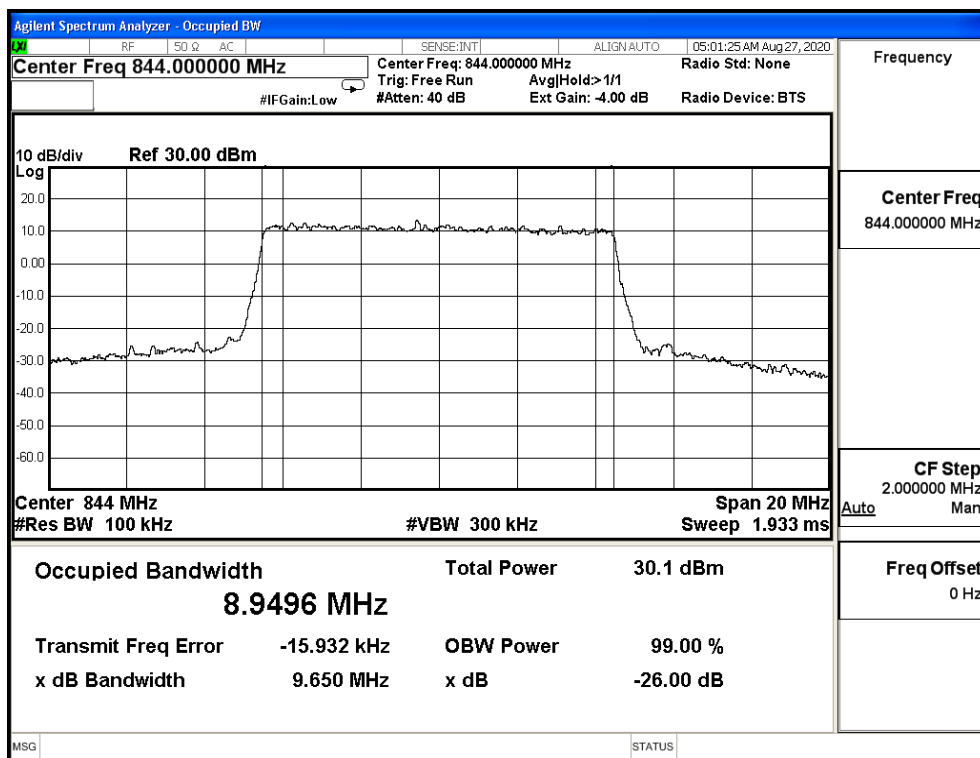


64QAM_CH26840_10M

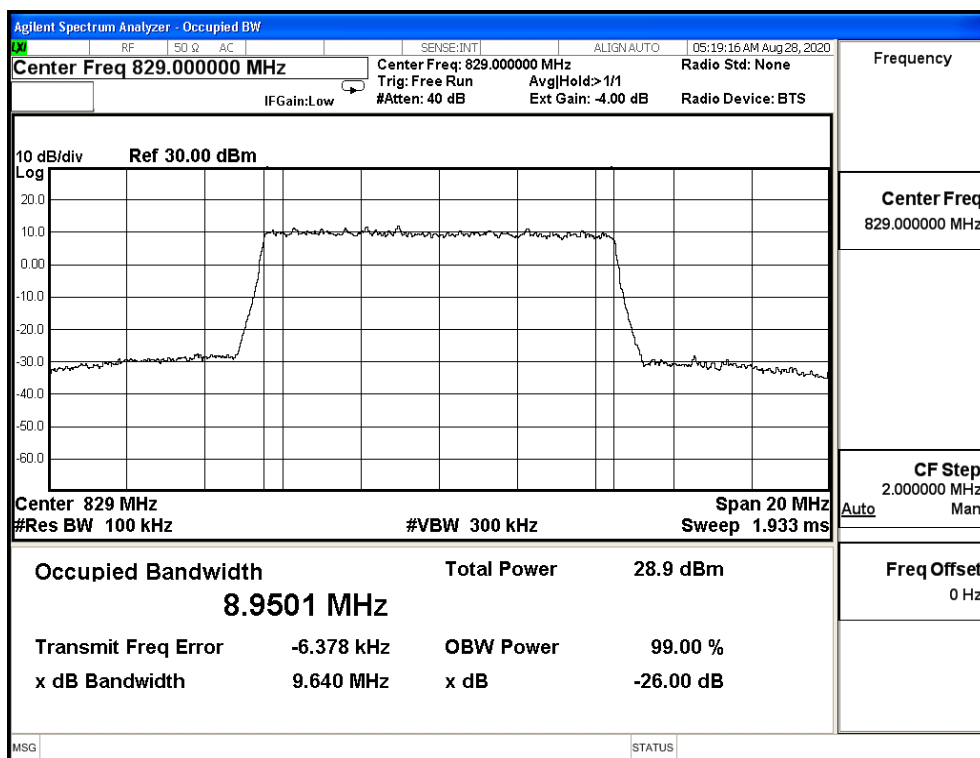


64QAM_CH26915_10M

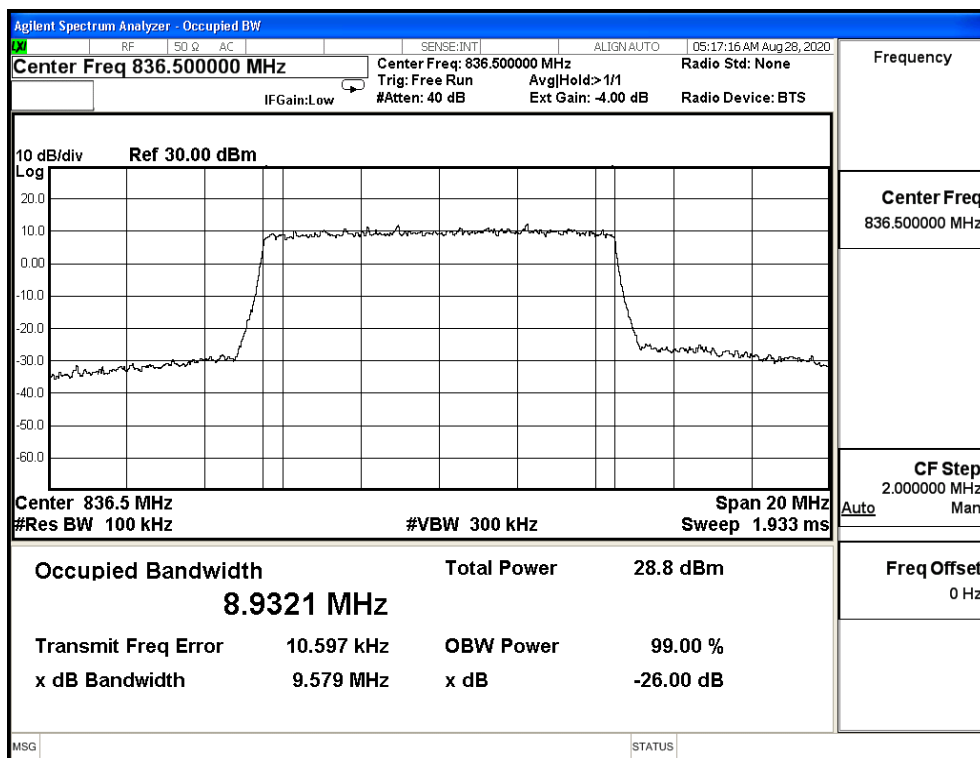


64QAM_CH26990_10M

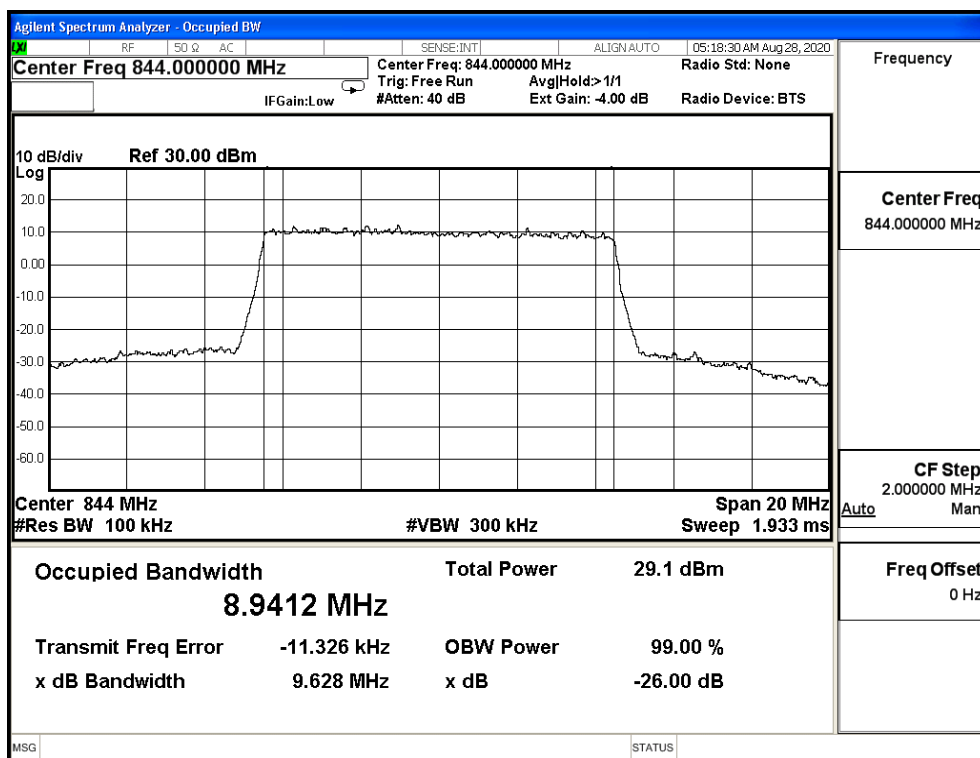


QPSK_CH26865_15M

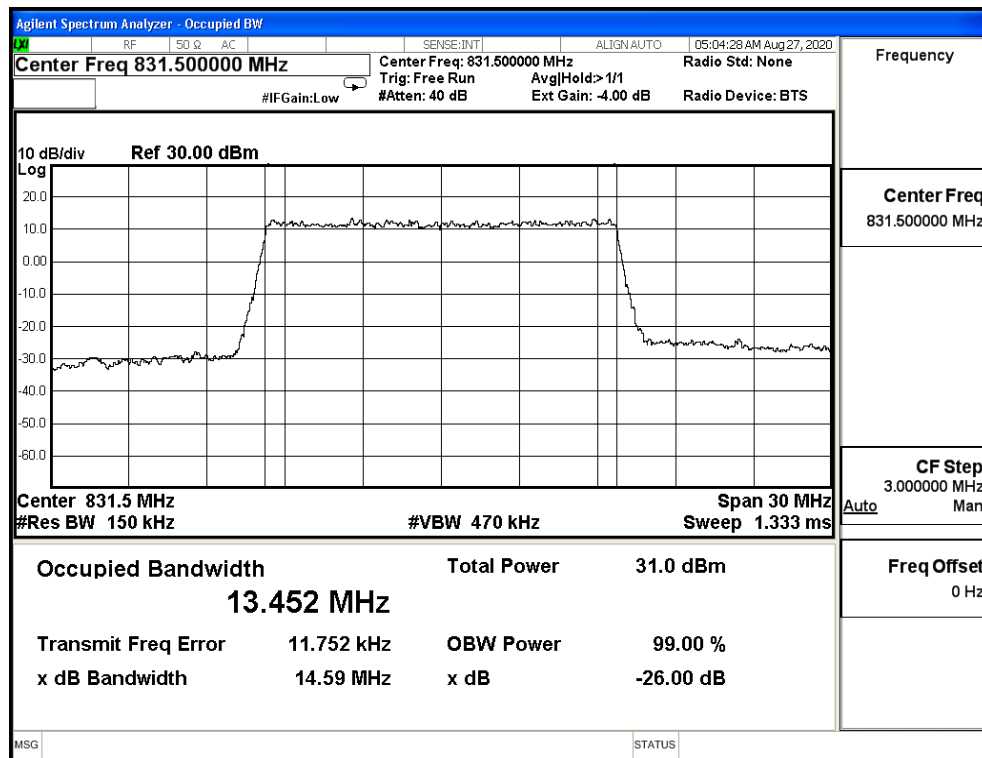


QPSK_CH26915_15M

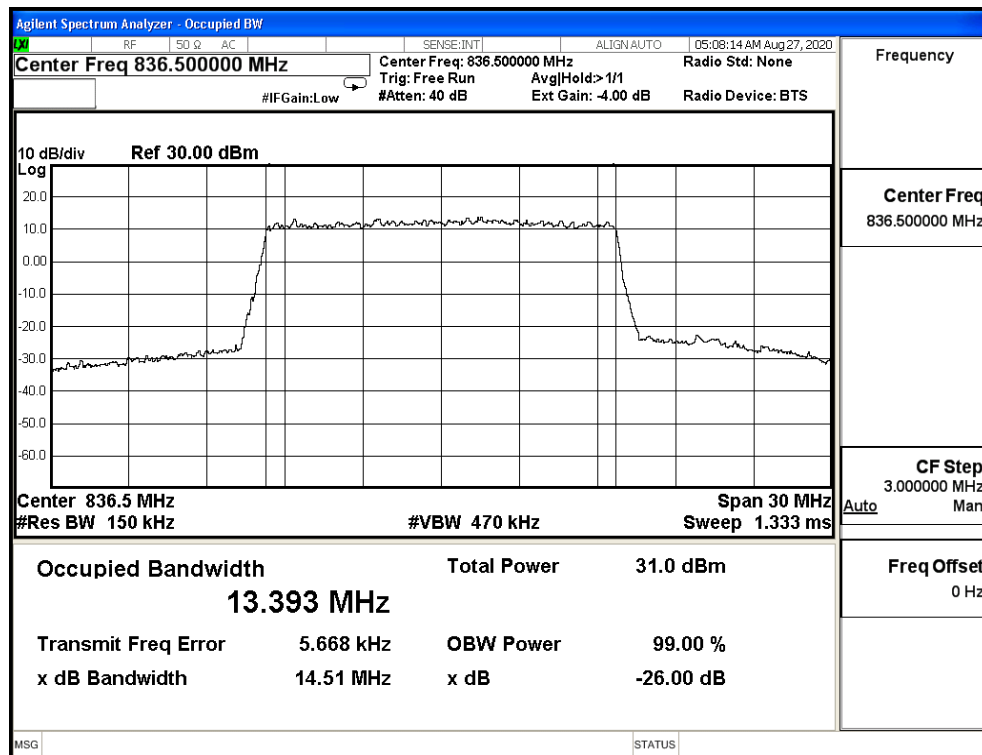


QPSK_CH26965_15M

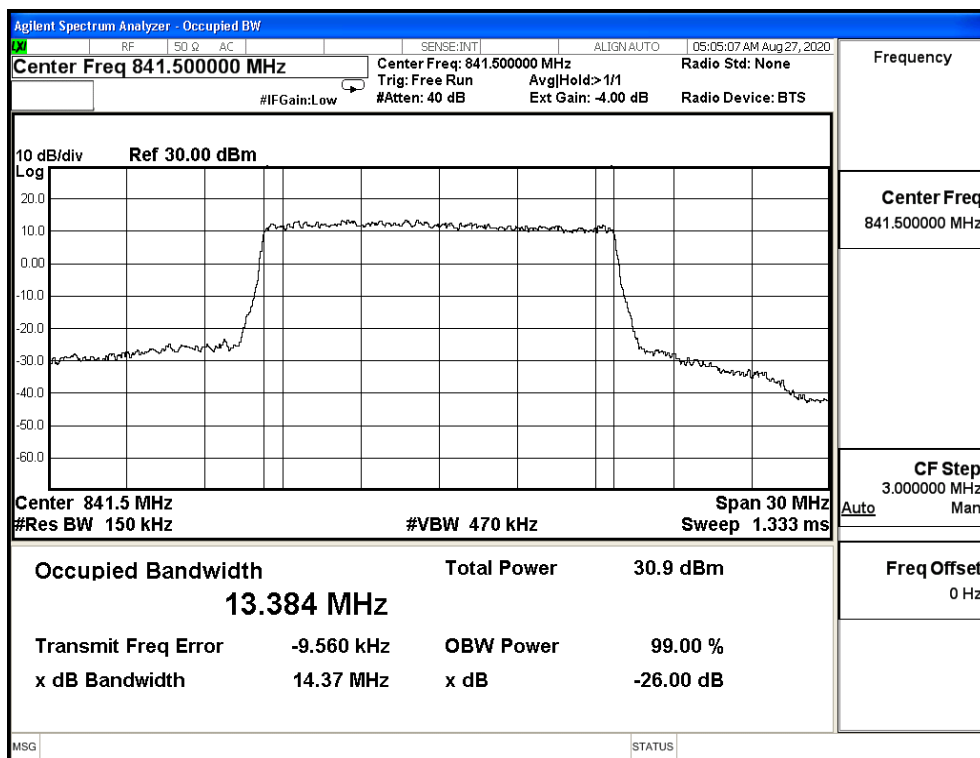


16QAM_CH26865_15M

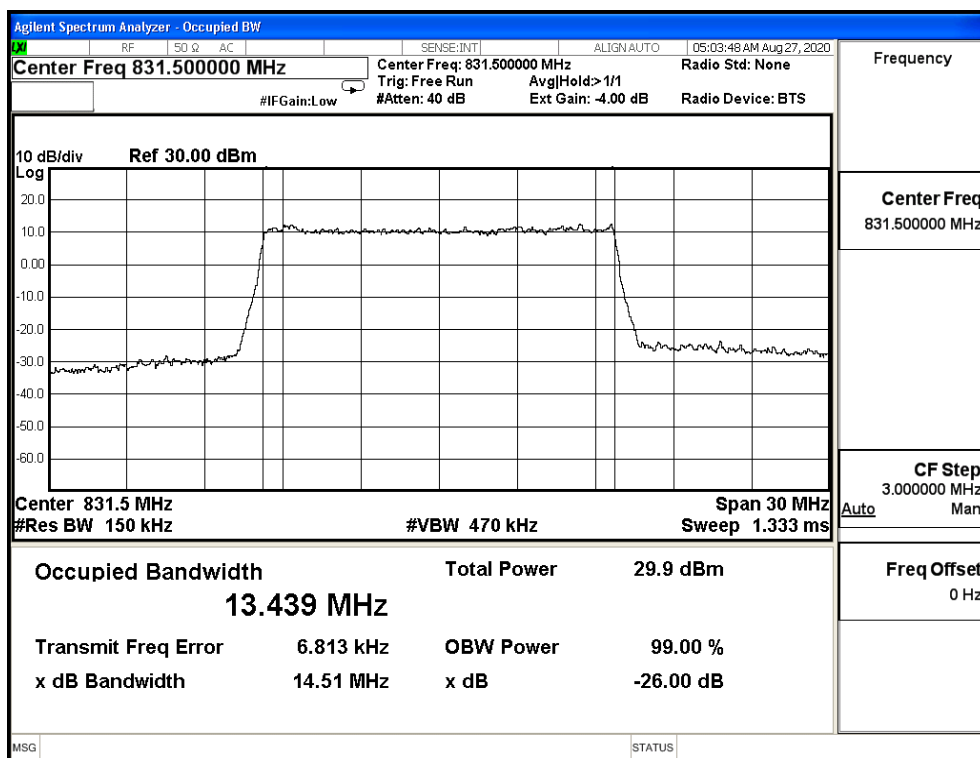


16QAM_CH26915_15M

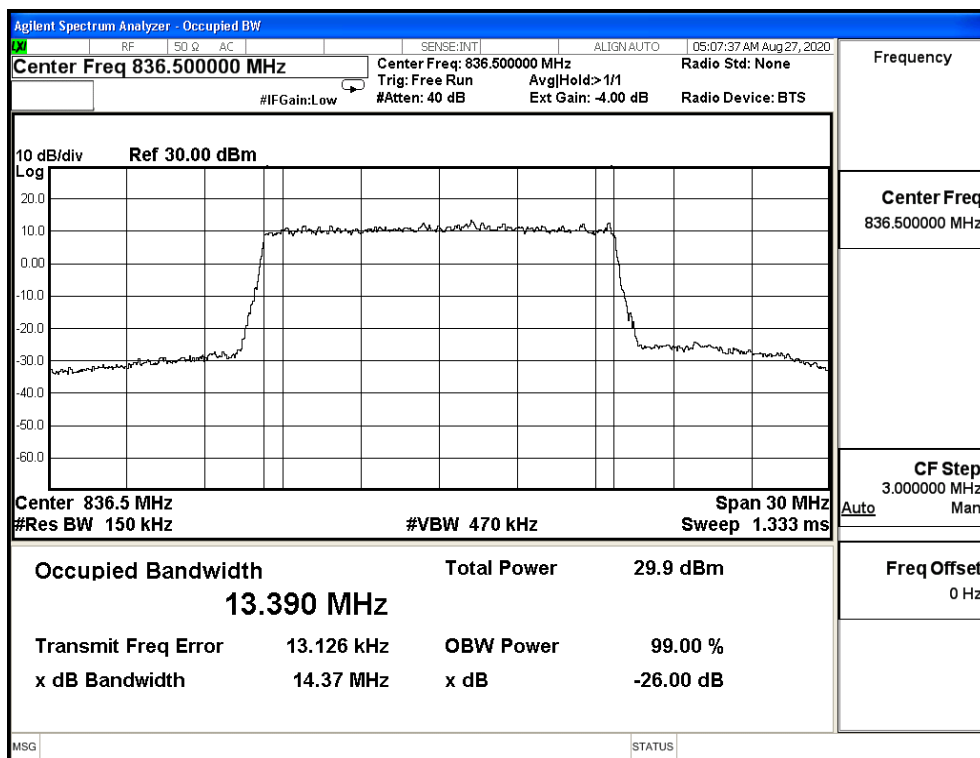


16QAM_CH26965_15M

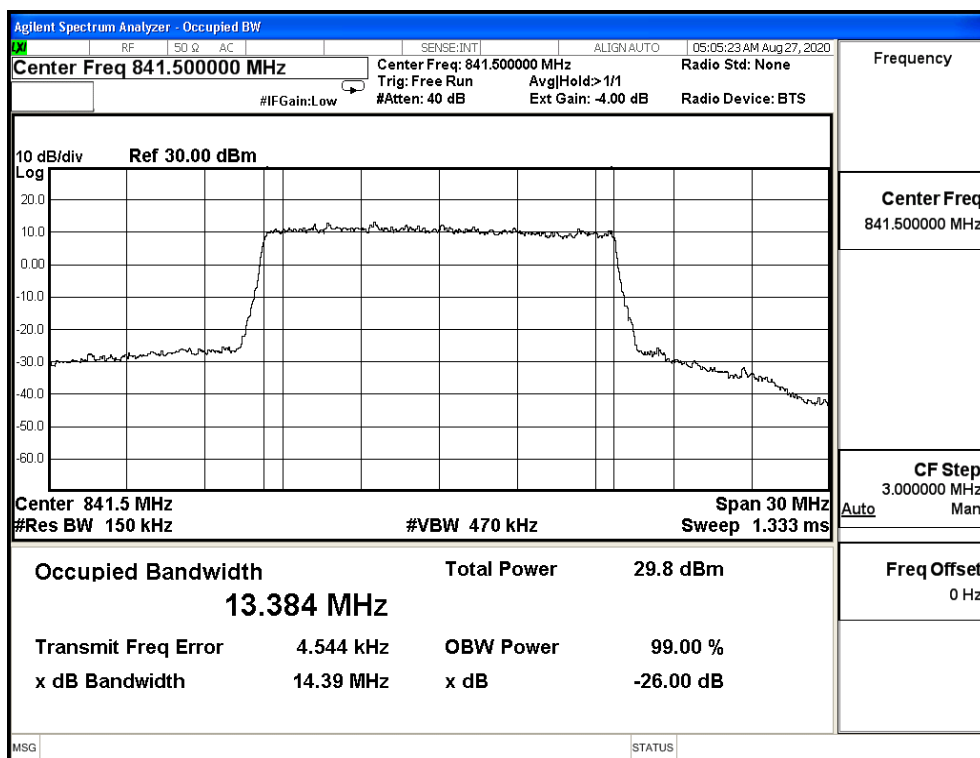


64QAM_CH26865_15M

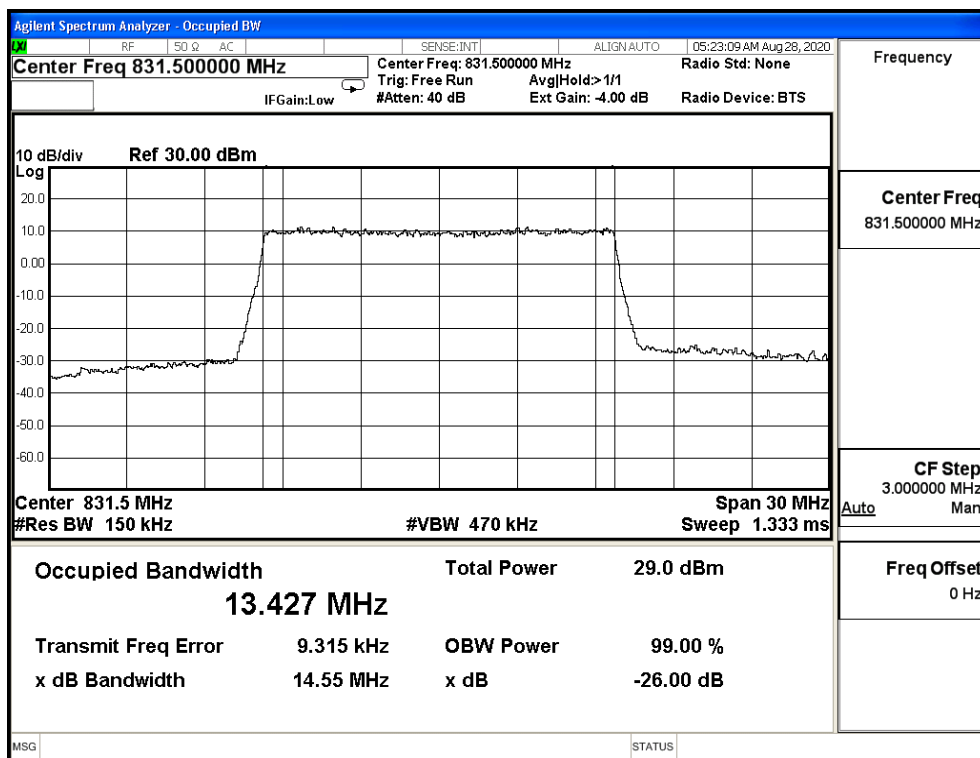

64QAM_CH26915_15M

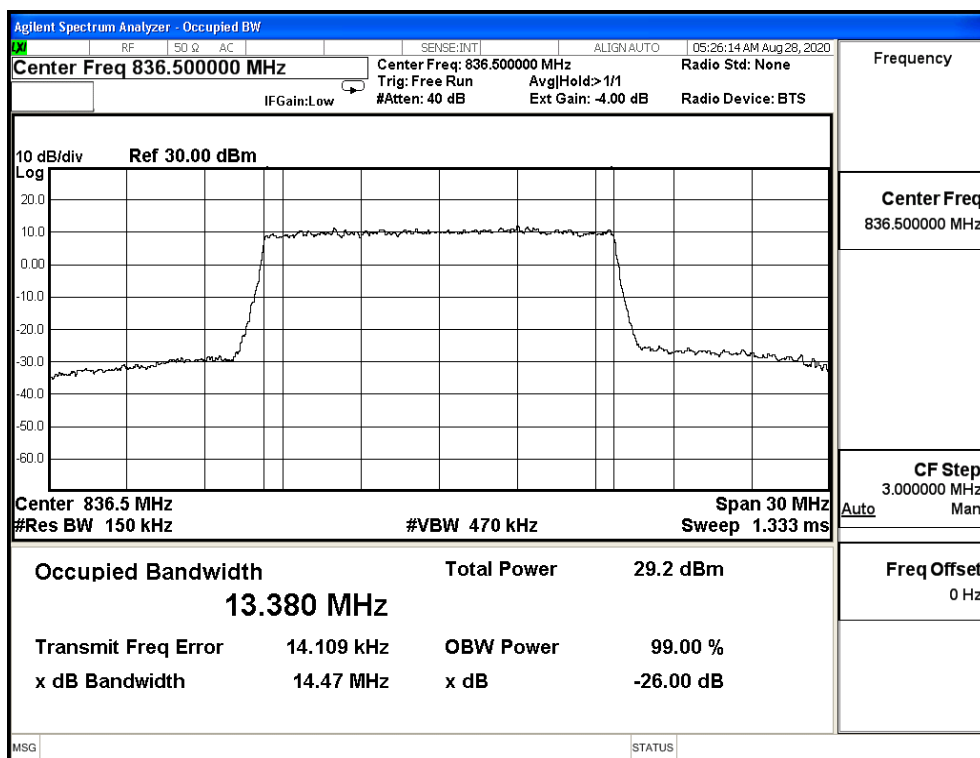

64QAM_CH26965_15M

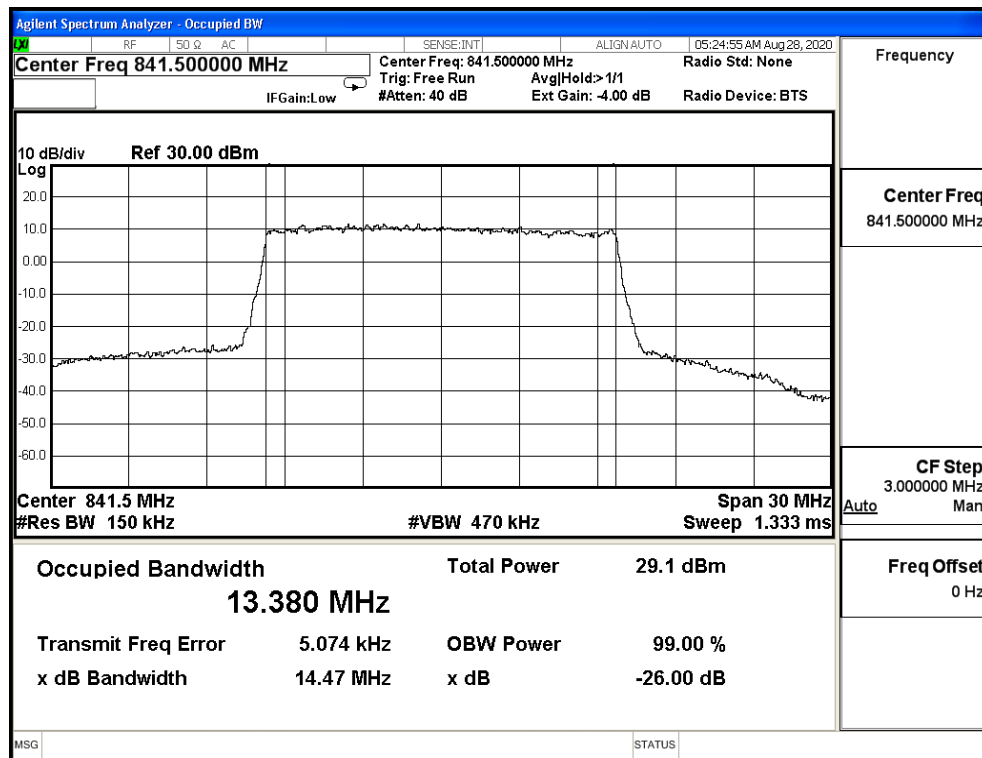


Product	Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 4: LTE Band 7		
Date of Test	2020/09/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	60


Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
5M	QPSK	2502.5	4.901	4.487	N/A
		2535	4.921	4.488	N/A
		2567.5	4.882	4.469	N/A
	16-QAM	2502.5	4.886	4.477	N/A
		2535	4.865	4.474	N/A
		2567.5	4.922	4.479	N/A
	64-QAM	2502.5	4.881	4.483	N/A
		2535	4.879	4.485	N/A
		2567.5	4.882	4.486	N/A
10M	QPSK	2505	9.650	8.942	N/A
		2535	9.641	8.952	N/A
		2565	9.719	8.963	N/A
	16-QAM	2505	9.642	8.949	N/A
		2535	9.658	8.950	N/A
		2565	9.592	8.947	N/A
	64-QAM	2505	9.634	8.936	N/A
		2535	9.628	8.944	N/A
		2565	9.619	8.939	N/A
15M	QPSK	2507.5	14.410	13.402	N/A
		2535	14.490	13.434	N/A
		2562.5	14.450	13.403	N/A
	16-QAM	2507.5	14.450	13.400	N/A
		2535	14.450	13.413	N/A
		2562.5	14.460	13.414	N/A
	64-QAM	2507.5	14.440	13.385	N/A
		2535	14.560	13.406	N/A
		2562.5	14.440	13.395	N/A

Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
20M	QPSK	2510	19.080	17.872	N/A
		2535	19.020	17.904	N/A
		2560	19.420	17.895	N/A
	16-QAM	2510	19.180	17.906	N/A
		2535	19.160	17.906	N/A
		2560	19.120	17.882	N/A
	64-QAM	2510	19.160	17.855	N/A
		2535	19.290	17.882	N/A
		2560	19.250	17.857	N/A


QPSK_CH20775_5M

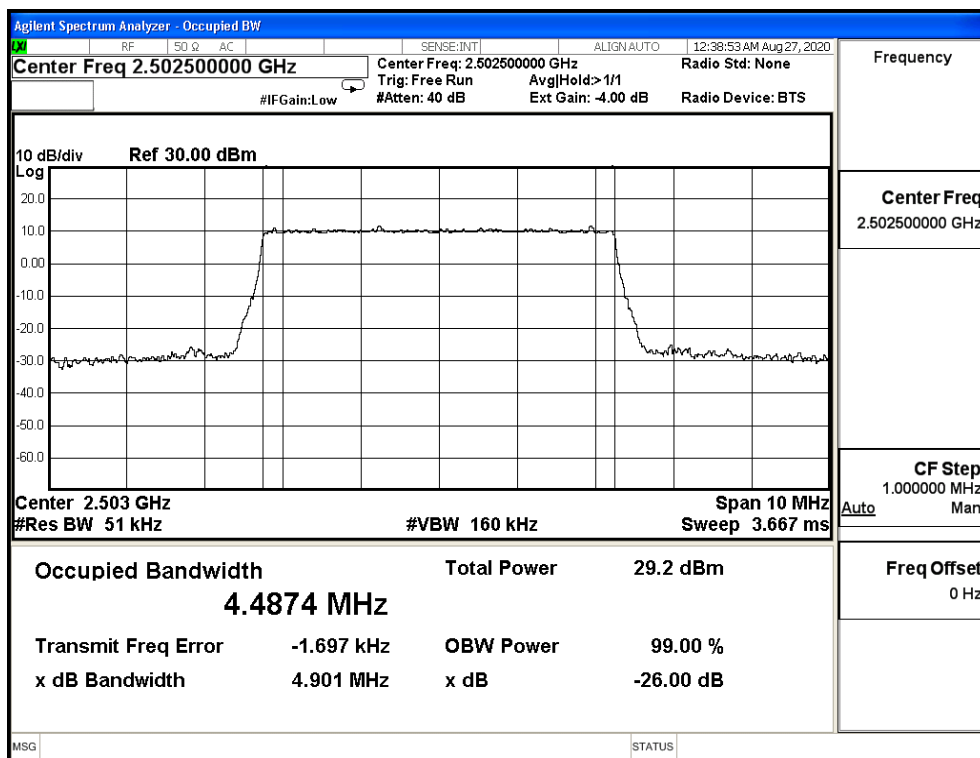


QPSK_CH21100_5M

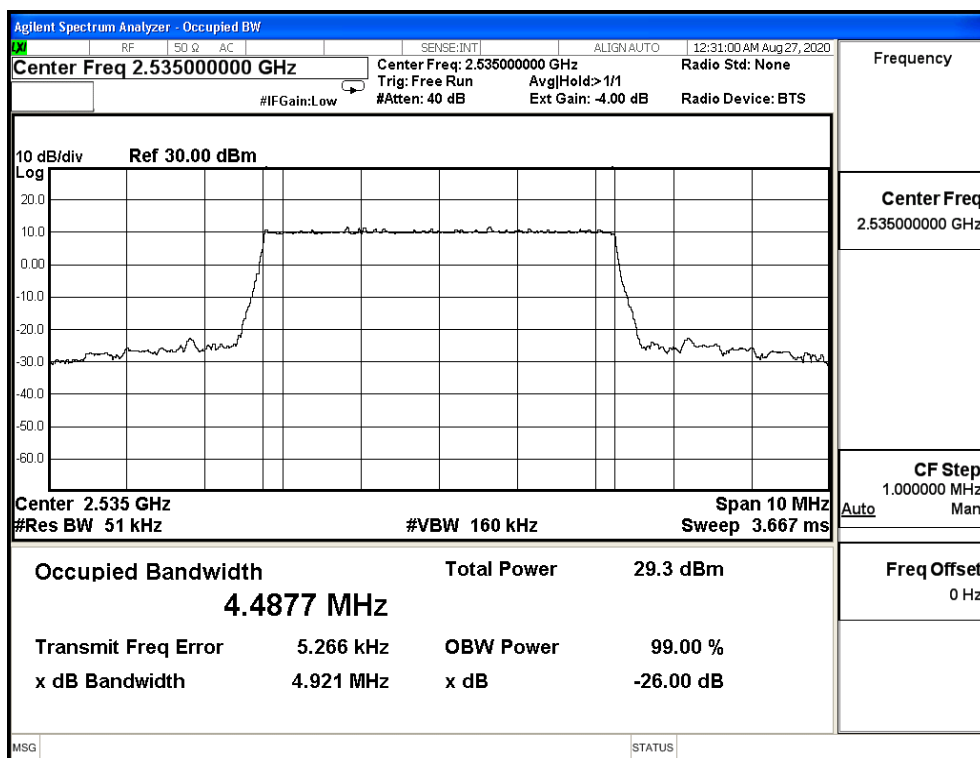


QPSK_CH21425_5M

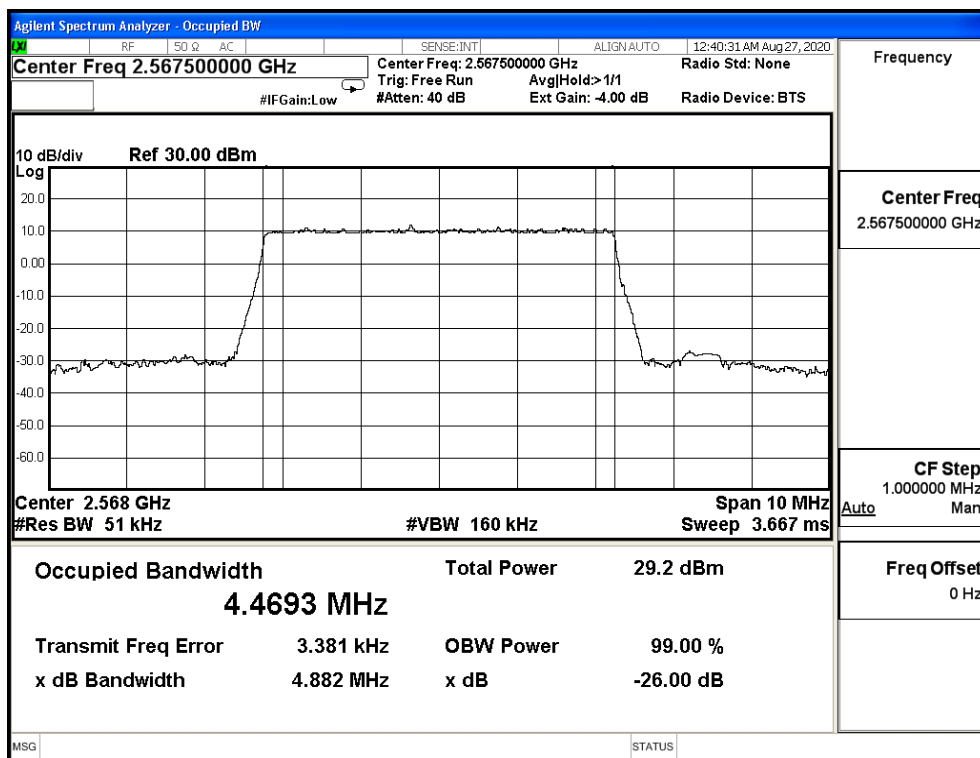


16QAM_CH20775_5M

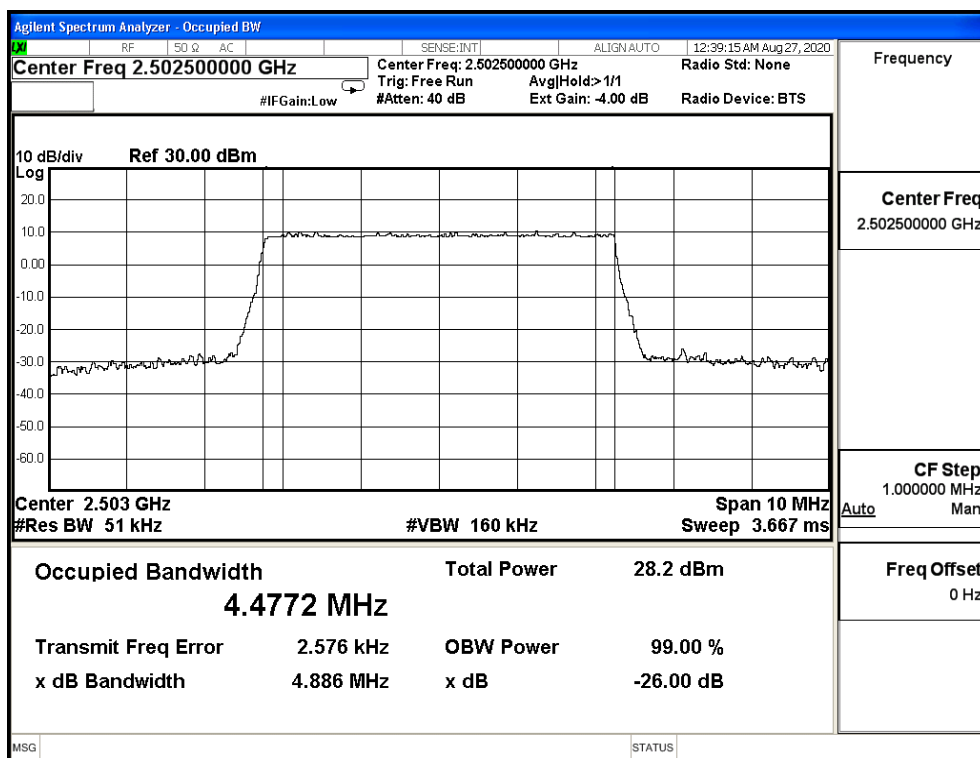


16QAM_CH21100_5M

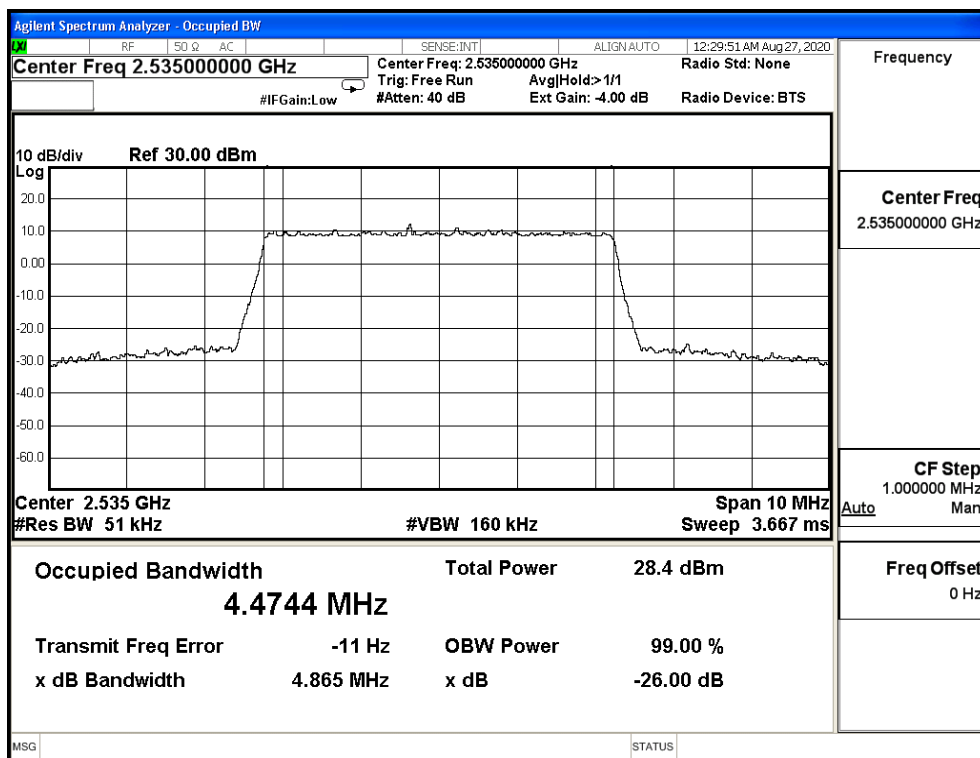


16QAM_CH21425_5M

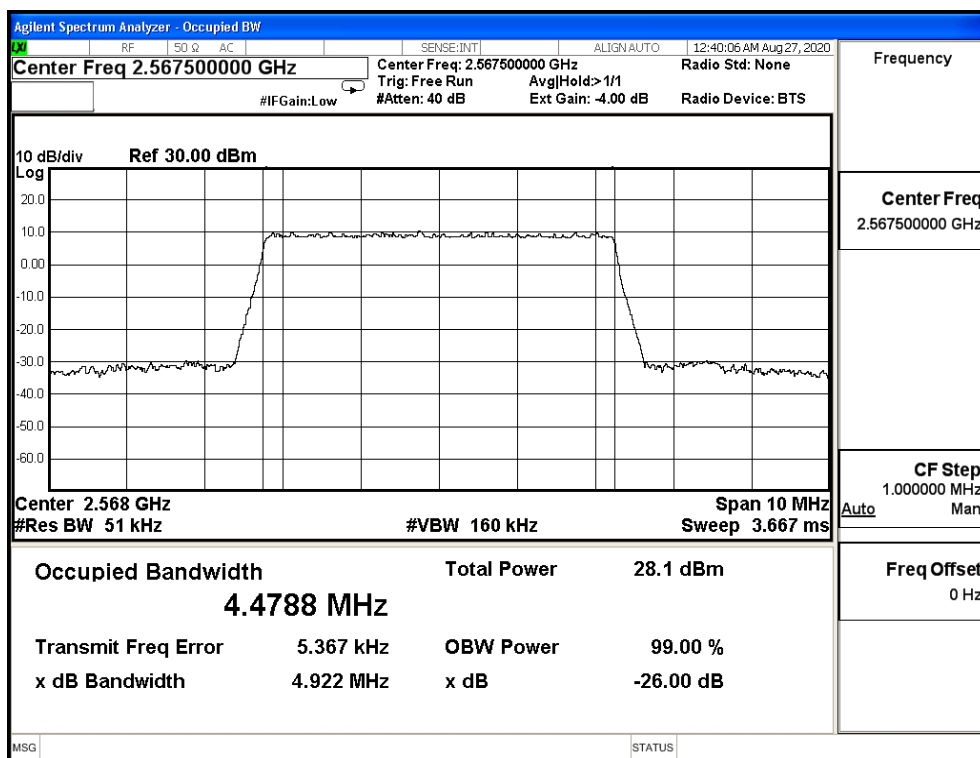


64QAM_CH20775_5M

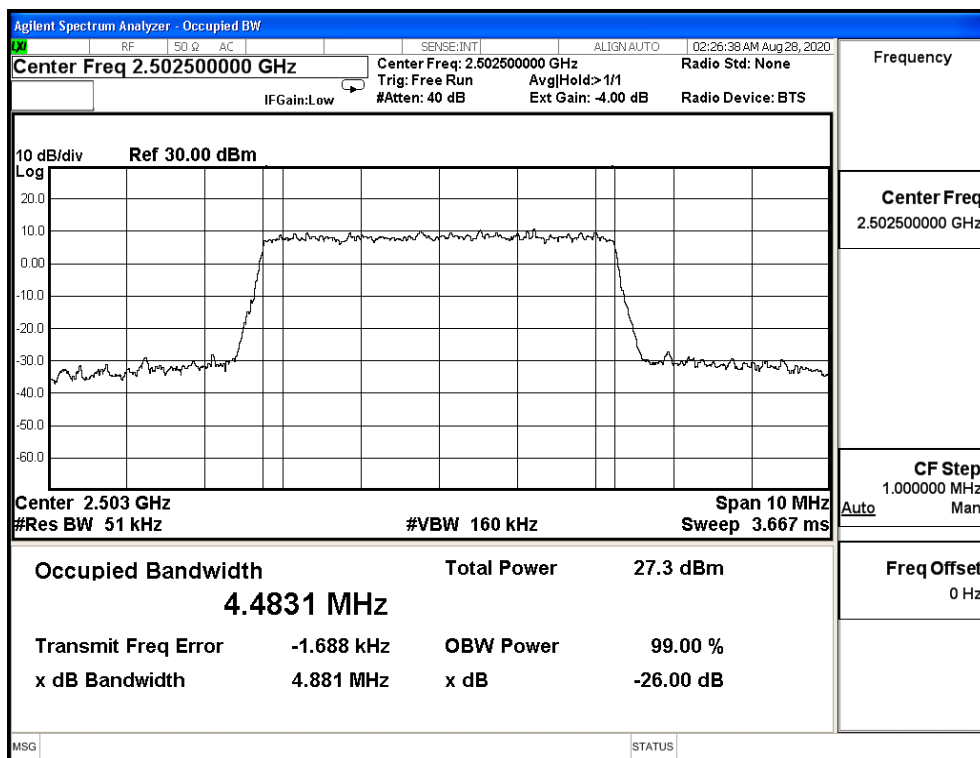


64QAM_CH21100_5M

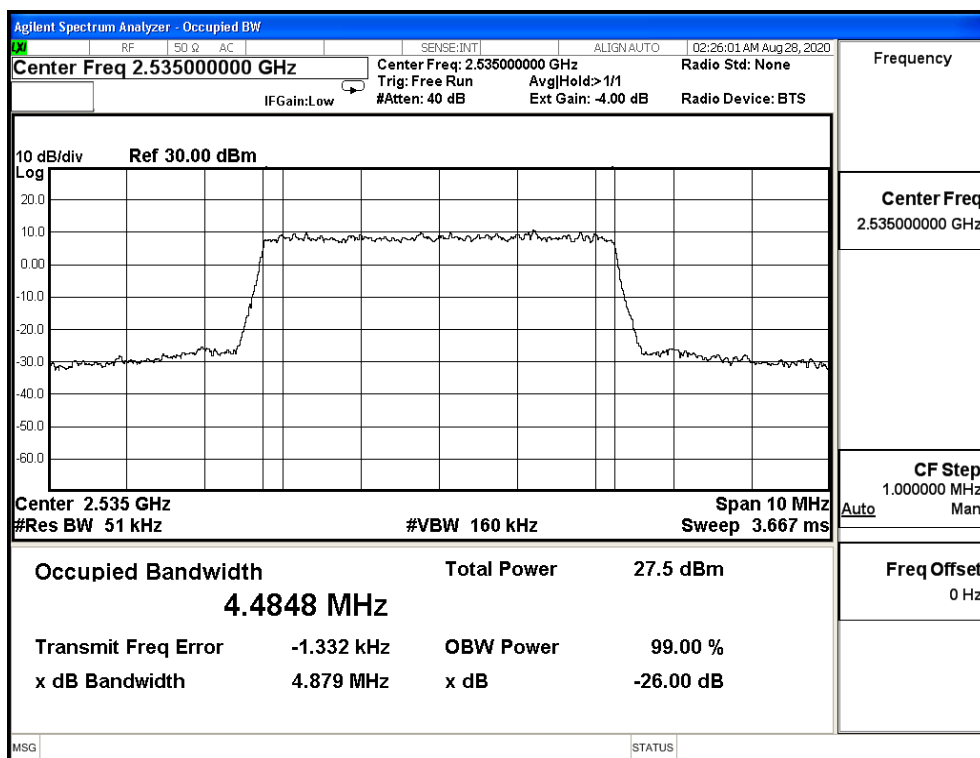


64QAM_CH21425_5M

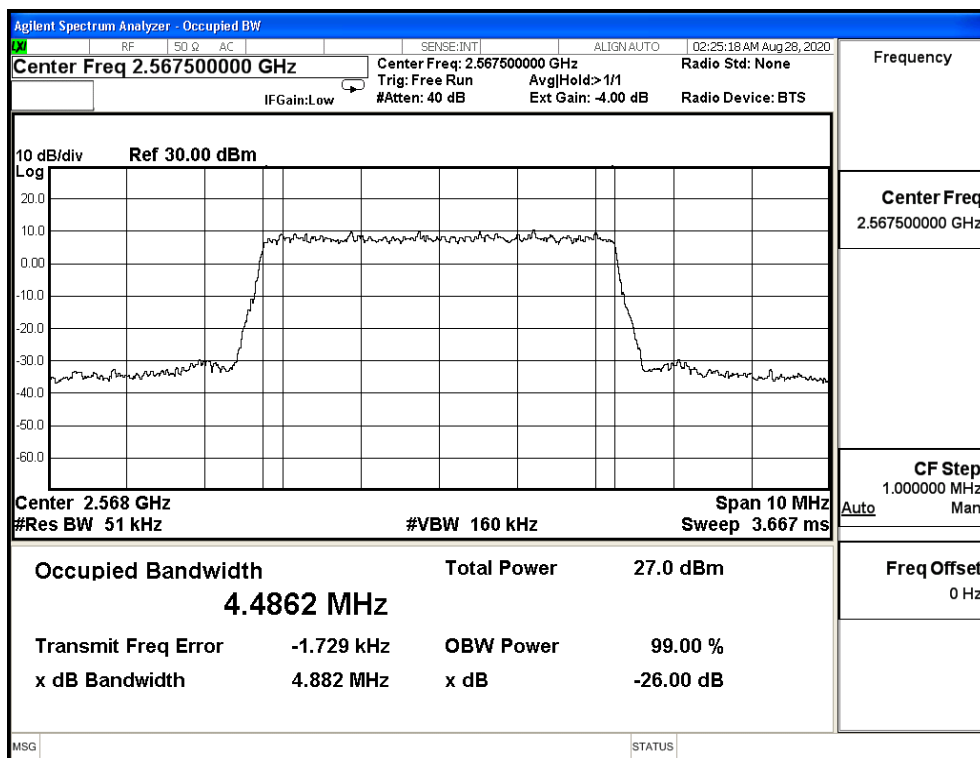


QPSK_CH20800_10M

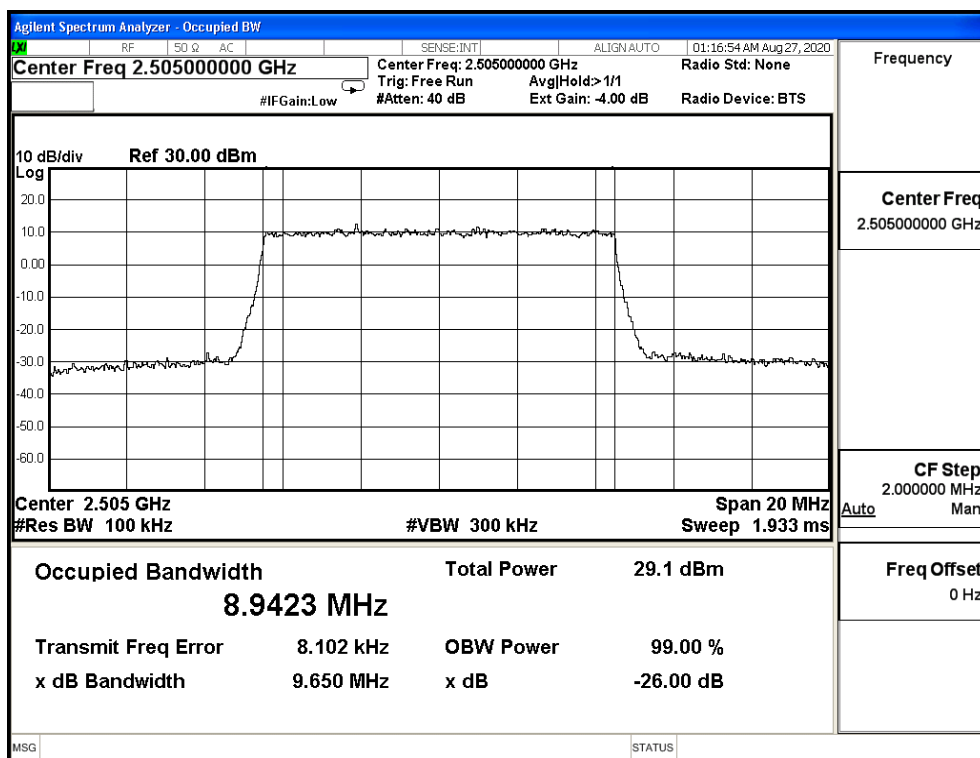


QPSK_CH21100_10M

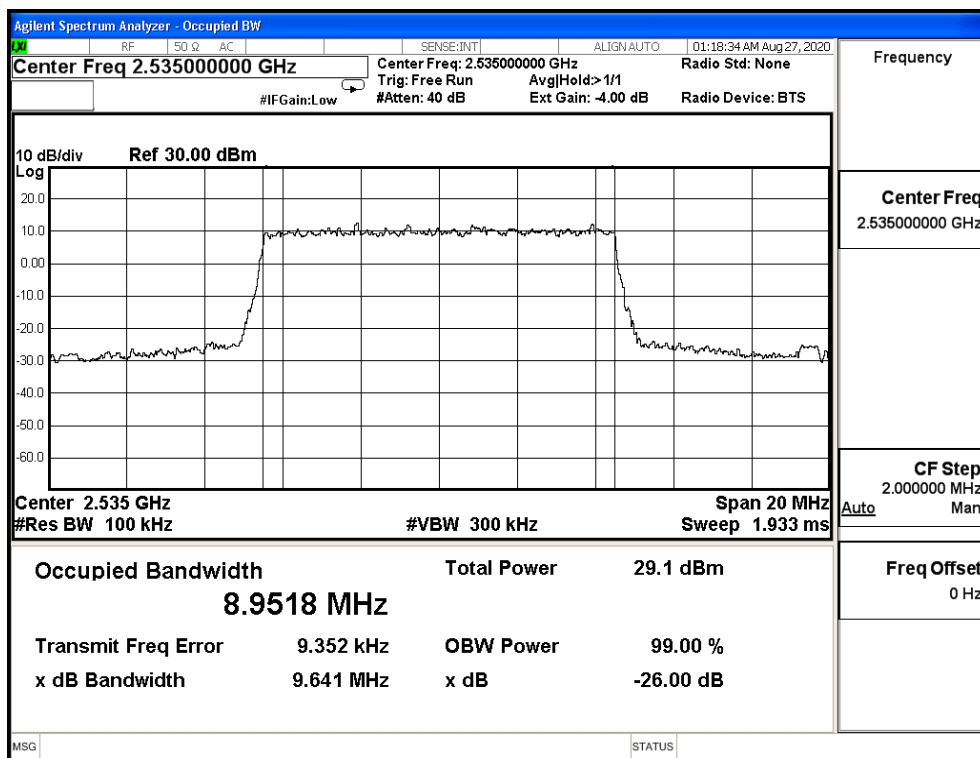


QPSK_CH21400_10M

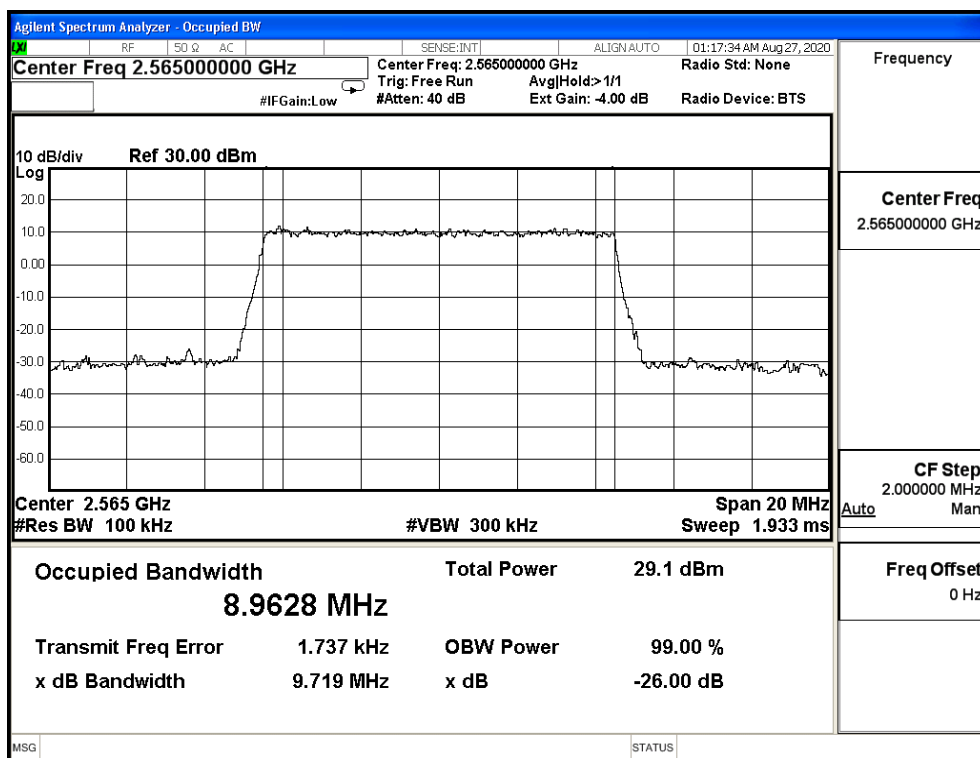


16QAM_CH20800_10M

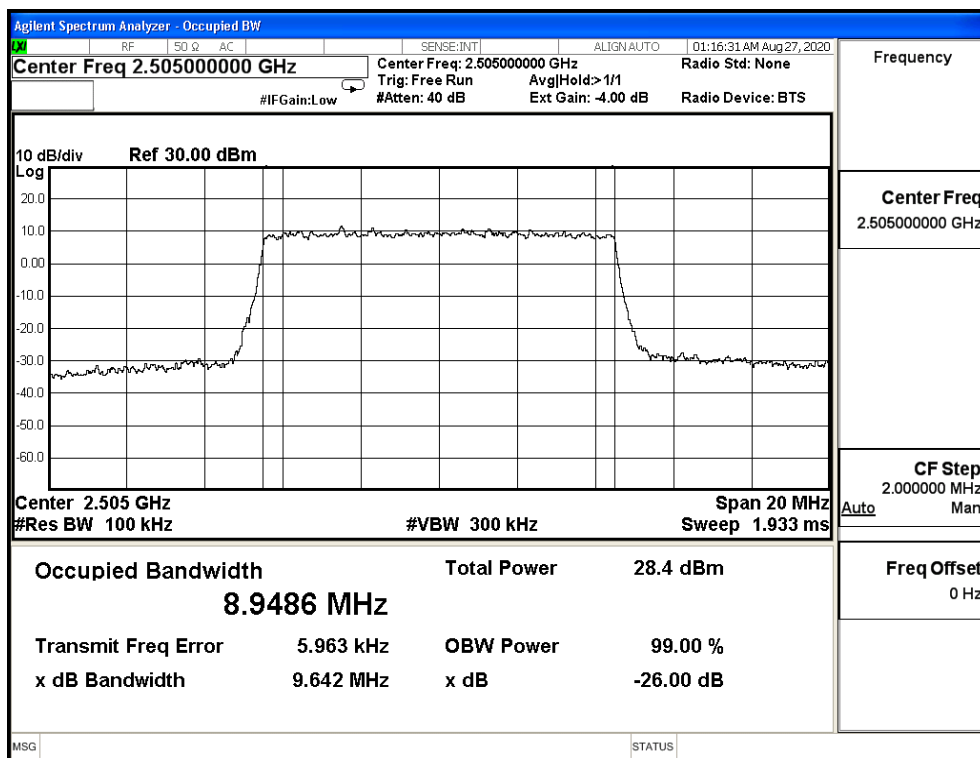


16QAM_CH21100_10M

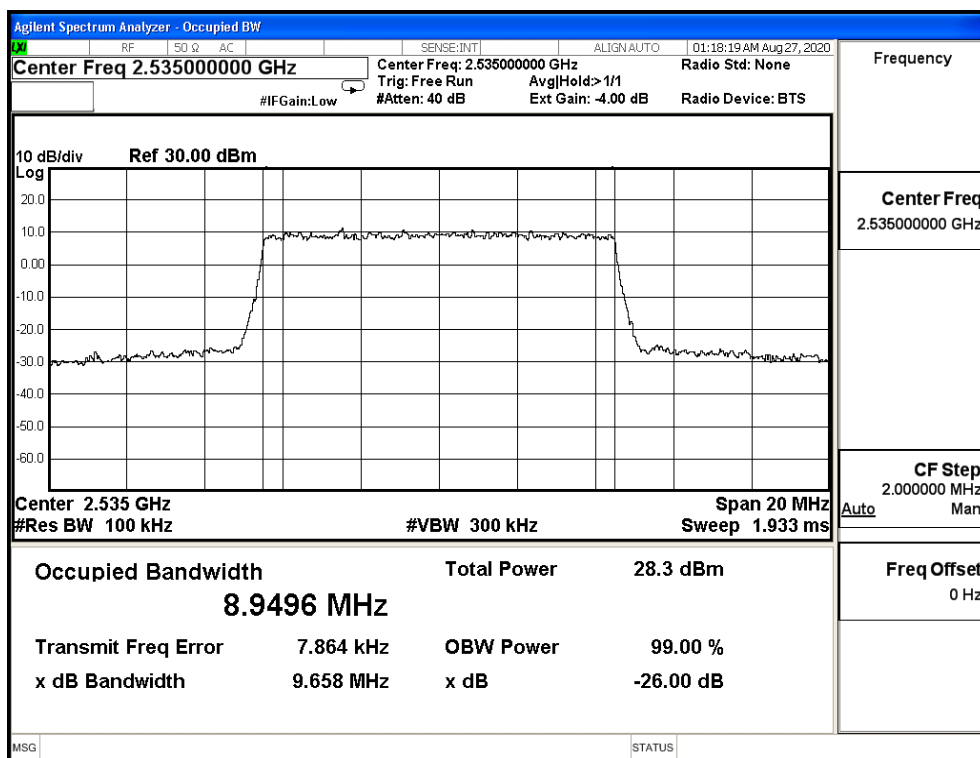


16QAM_CH21400_10M

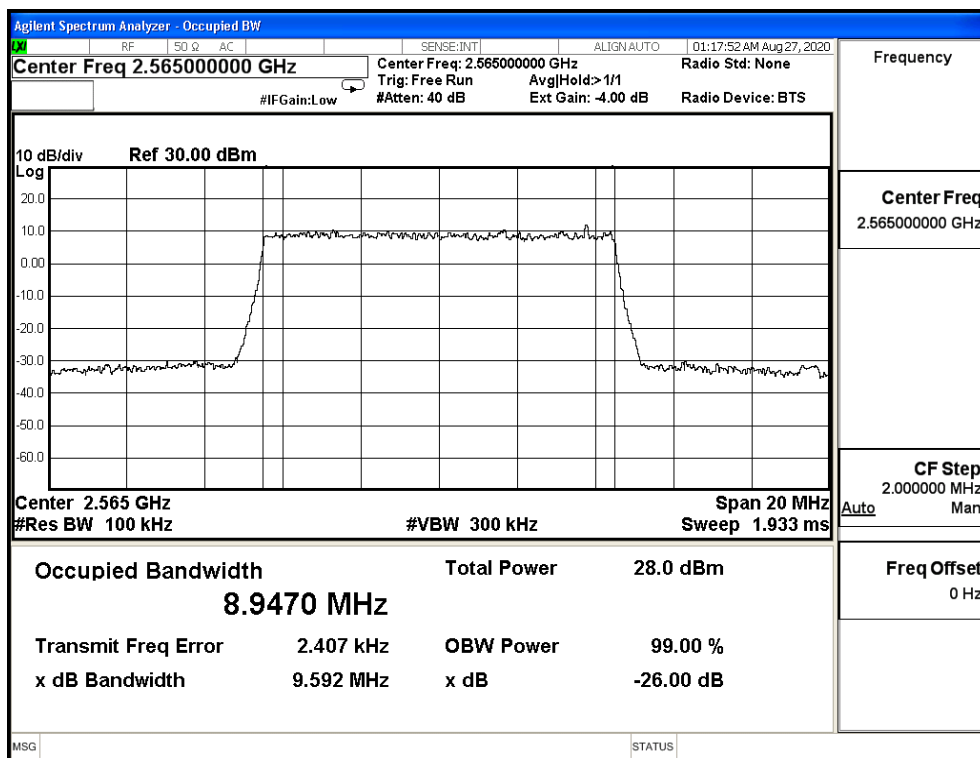


64QAM_CH20800_10M

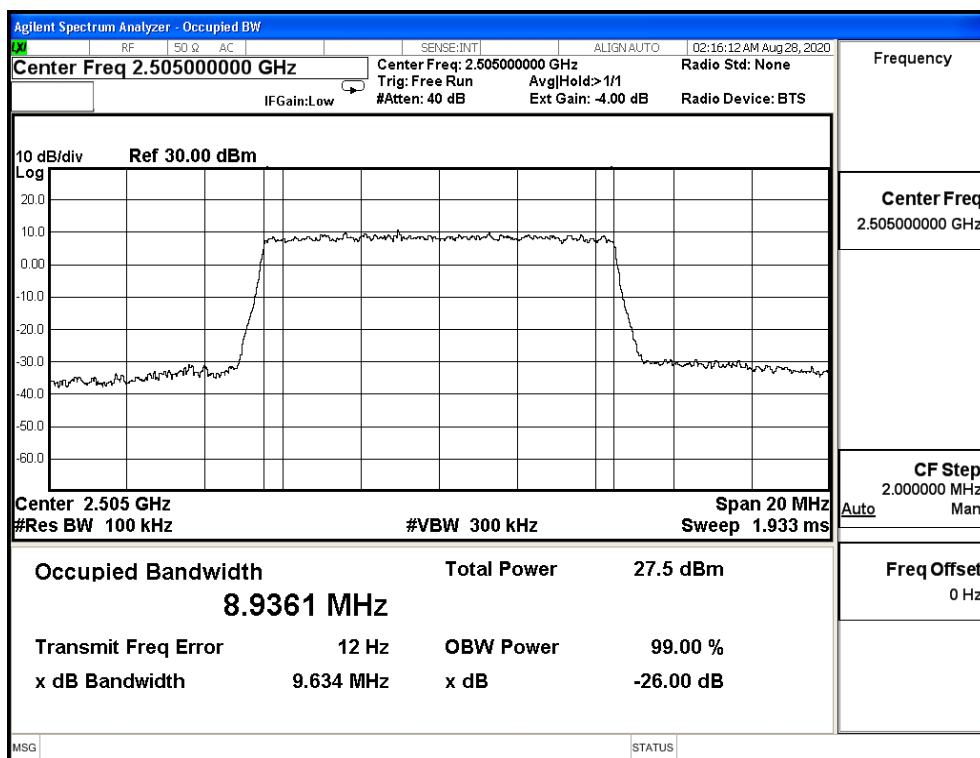


64QAM_CH21100_10M

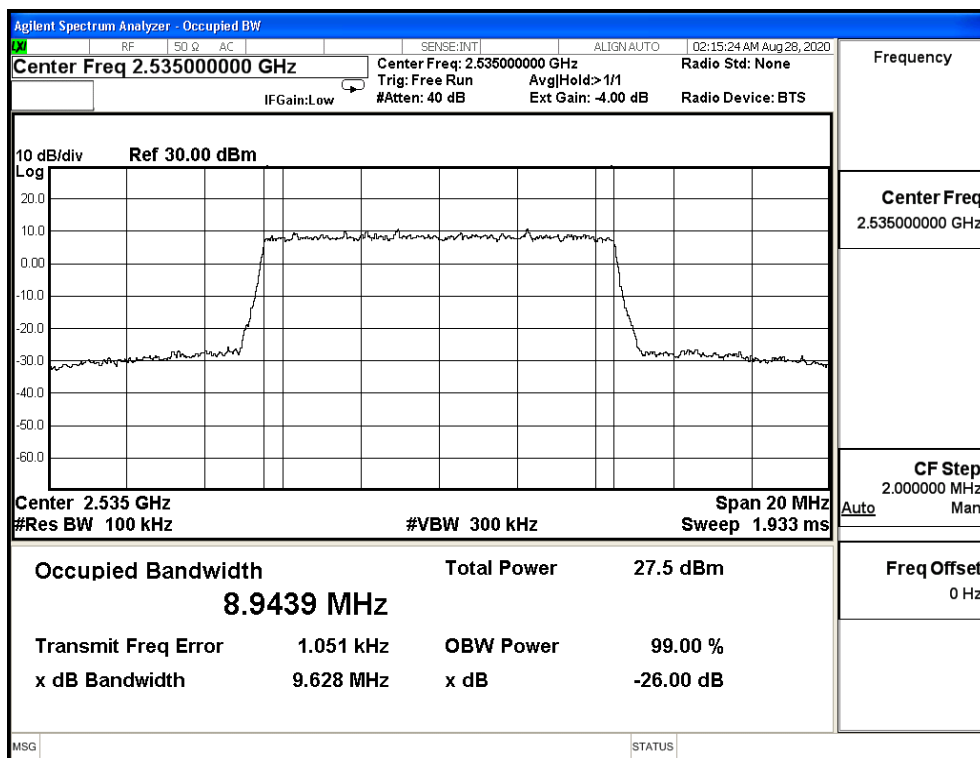


64QAM_CH21400_10M

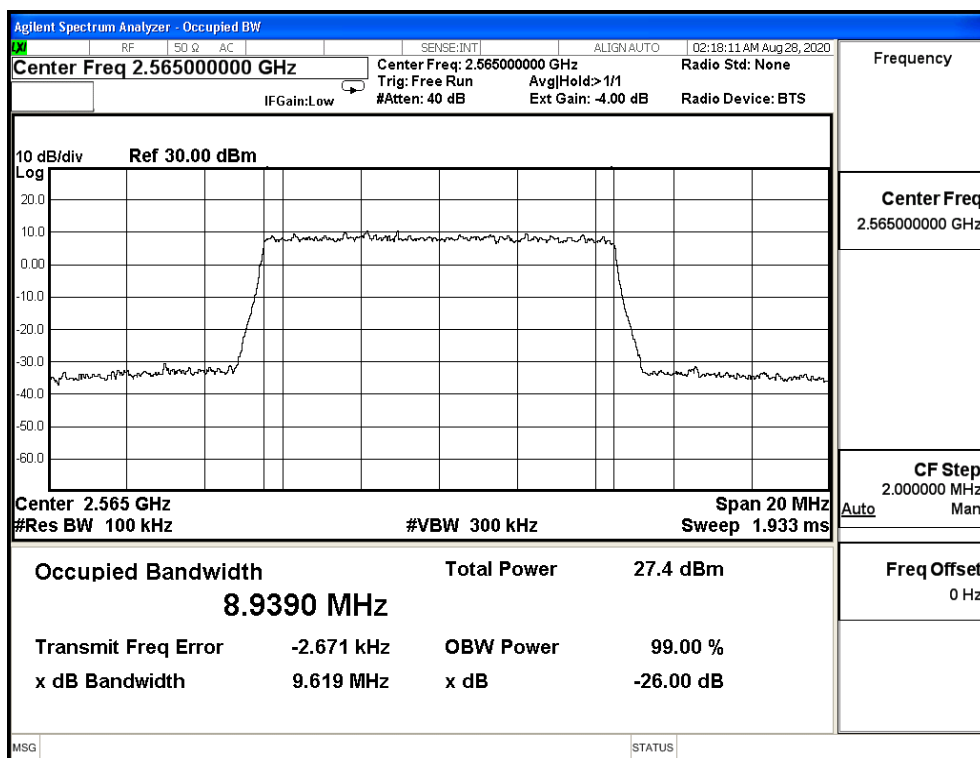


QPSK_CH20825_15M

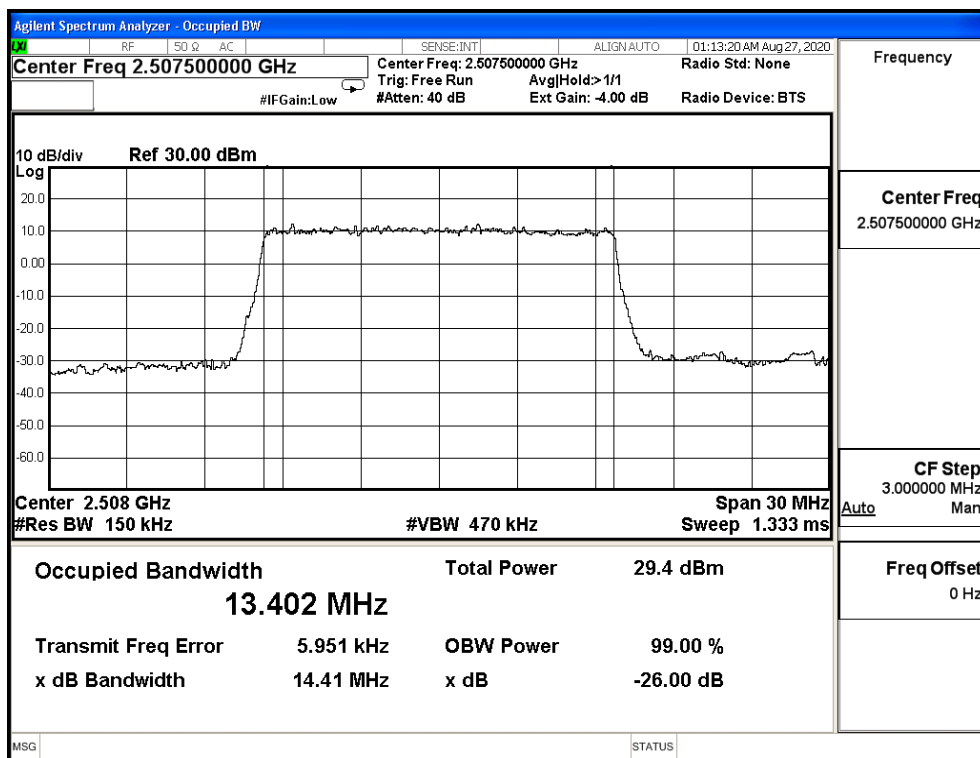


QPSK_CH21100_15M

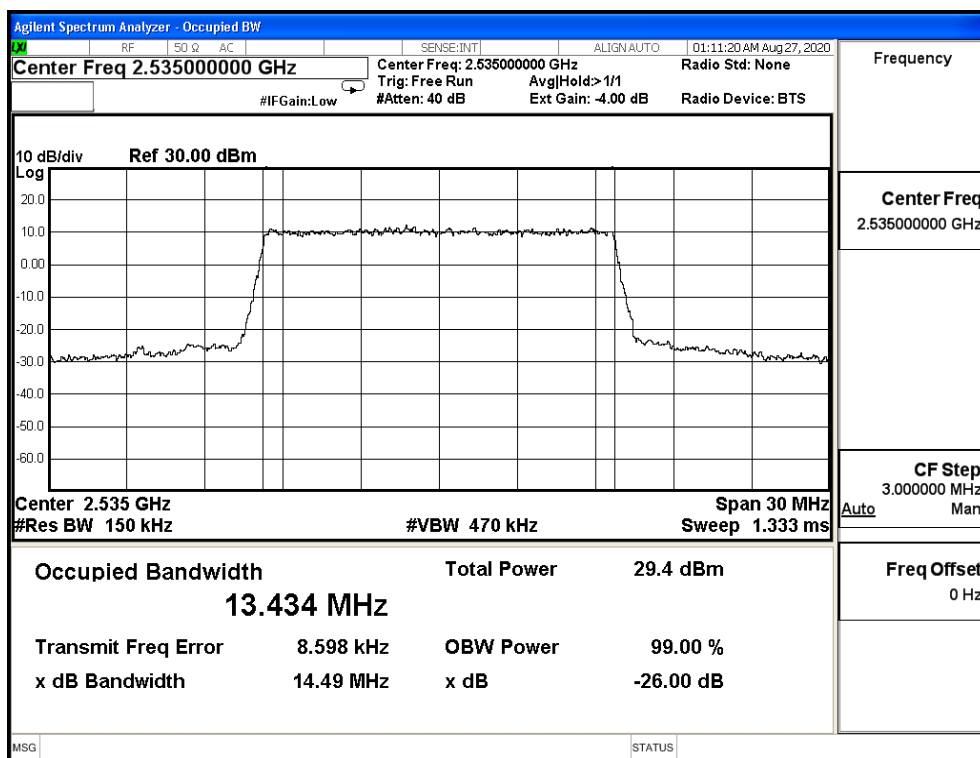


QPSK_CH21375_15M

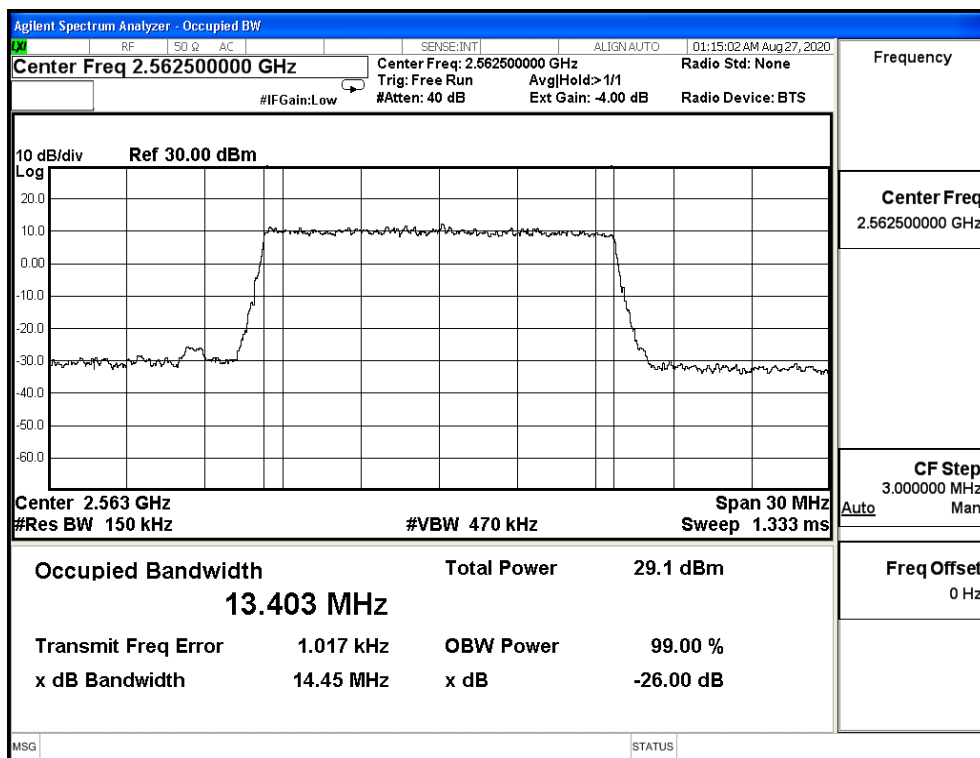


16QAM_CH20825_15M

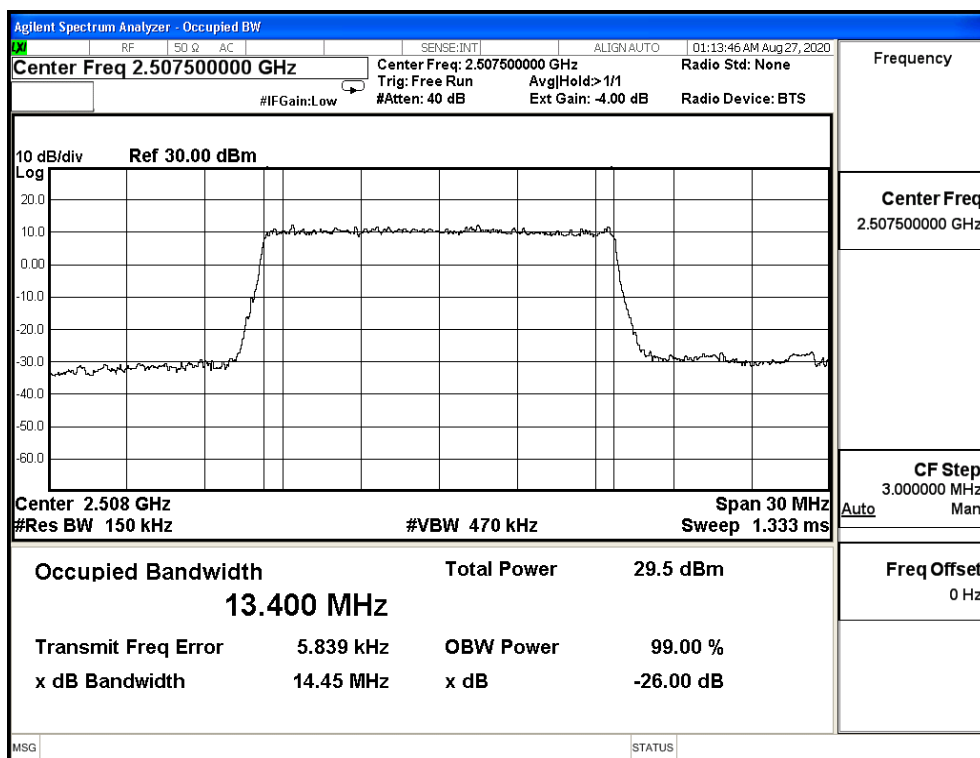


16QAM_CH21100_15M

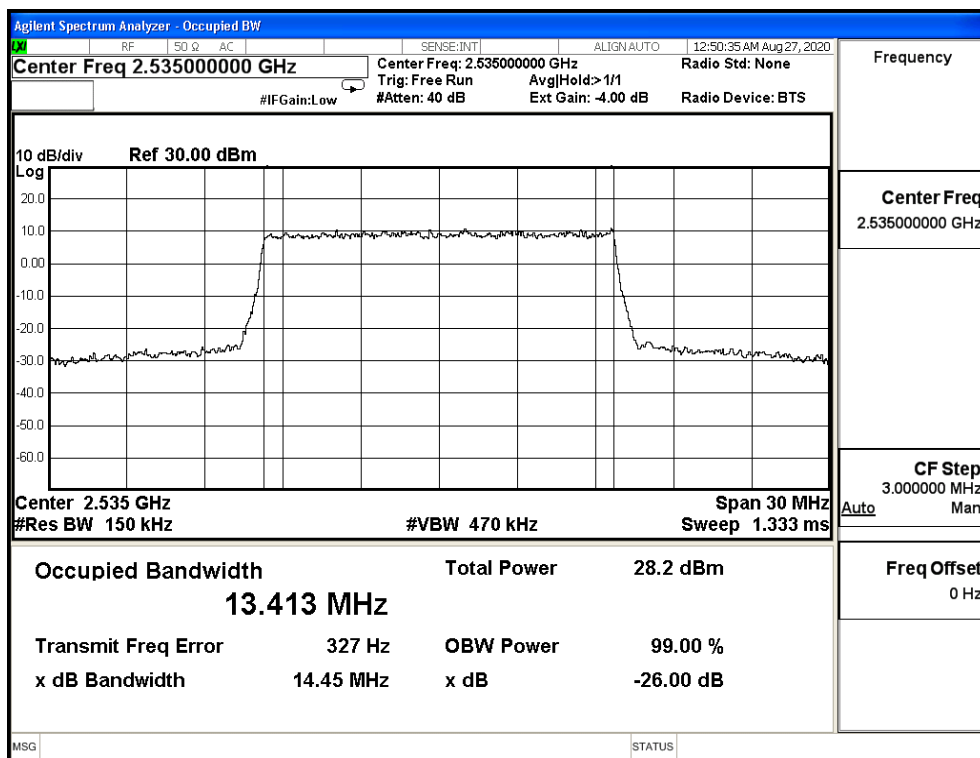


16QAM_CH21375_15M

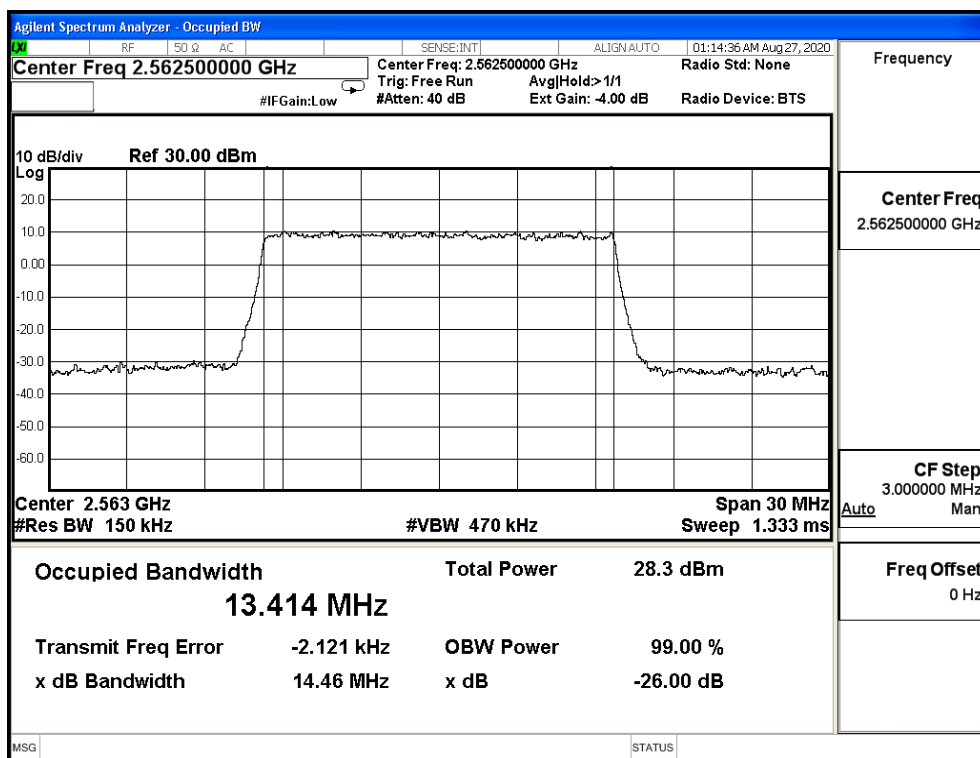


64QAM_CH20825_15M

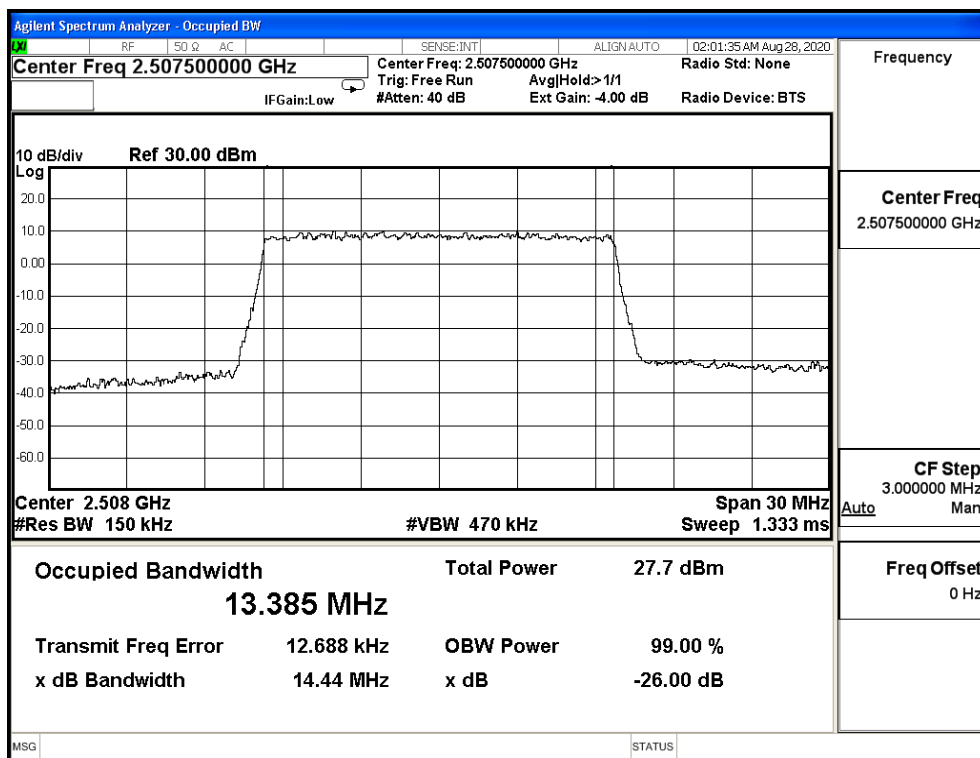


64QAM_CH21100_15M

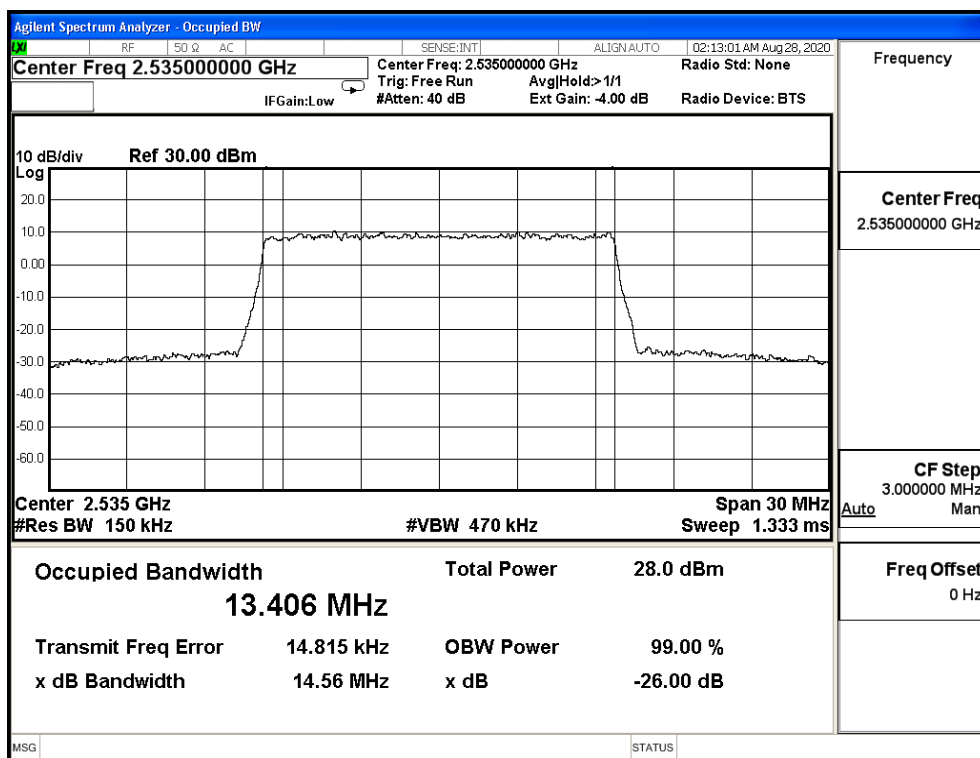


64QAM_CH21375_15M

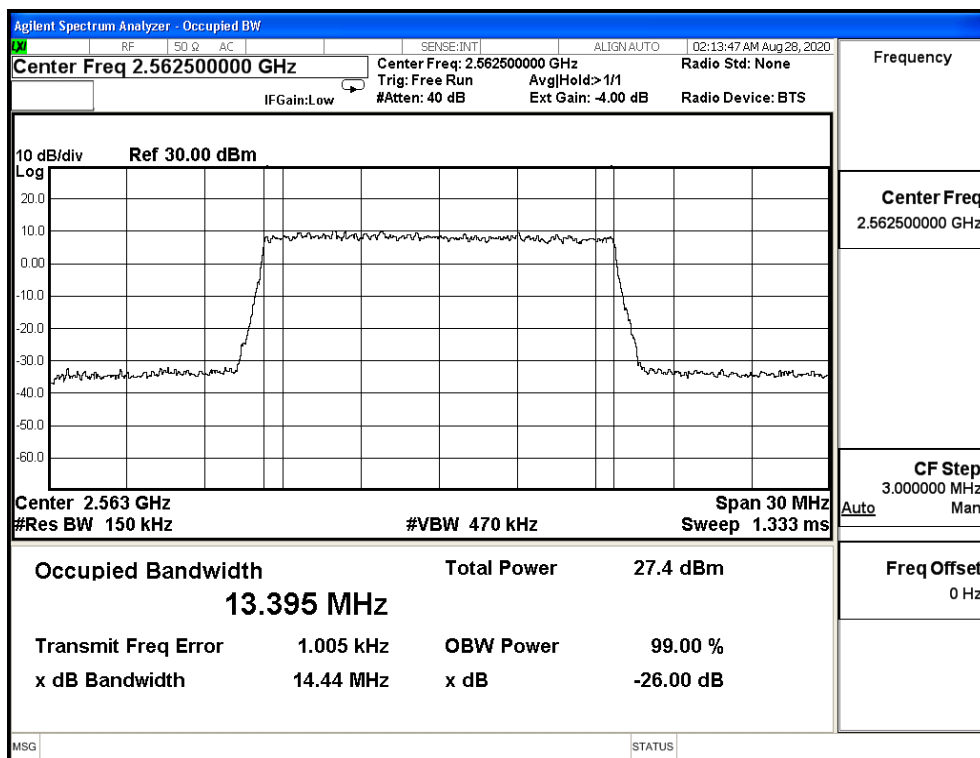


QPSK_CH20850_20M

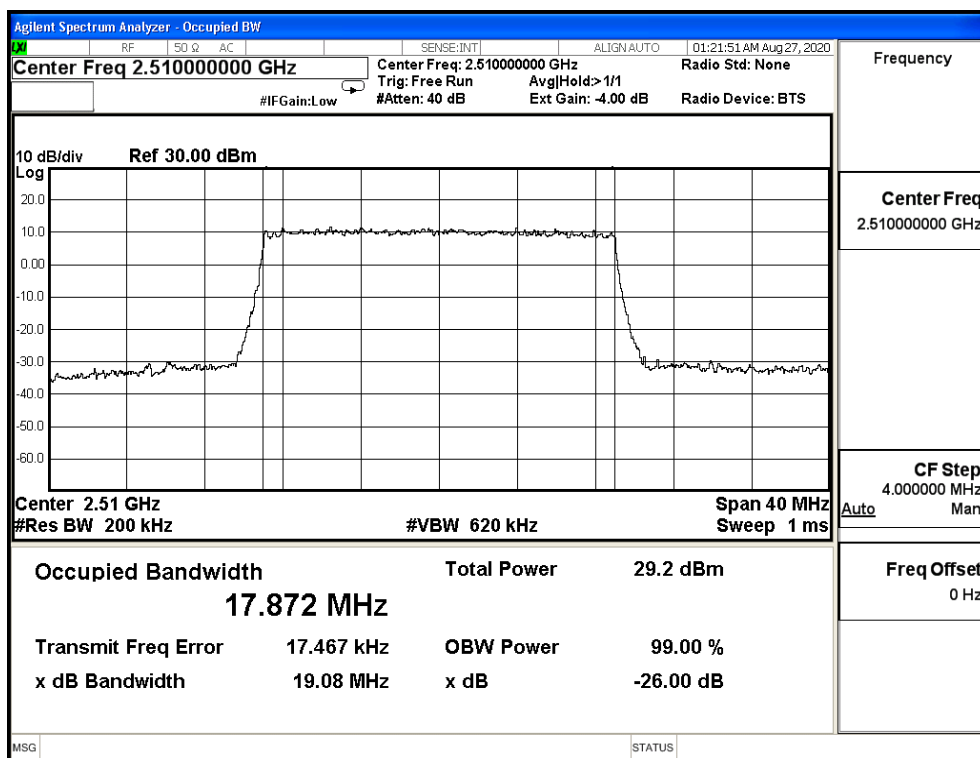


QPSK_CH21100_20M

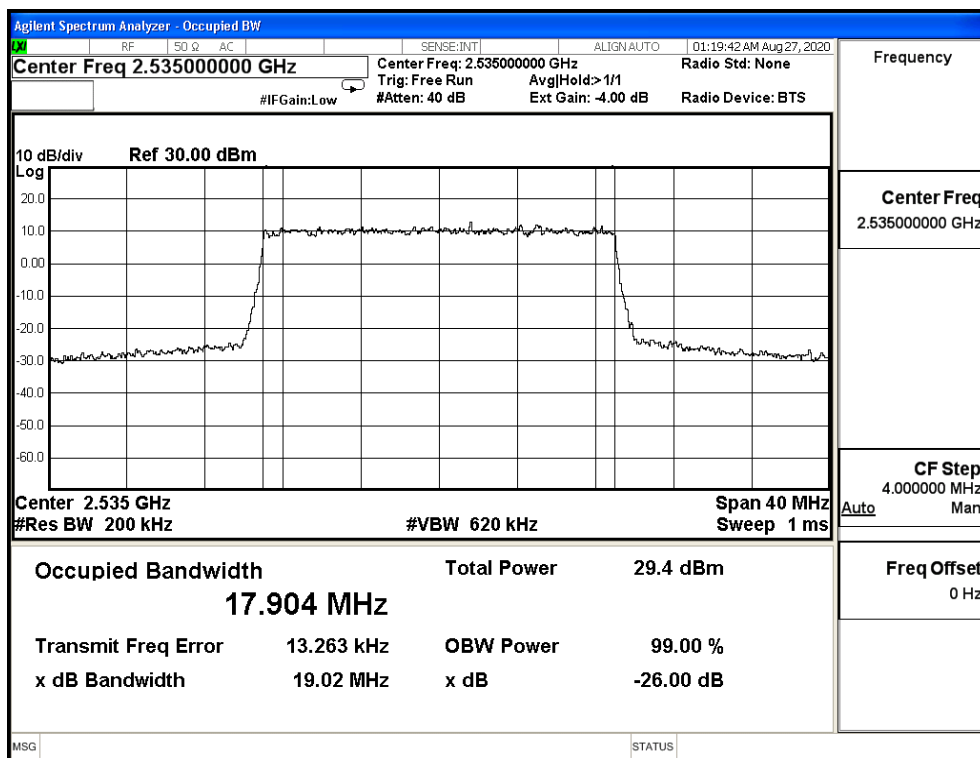


QPSK_CH21350_20M

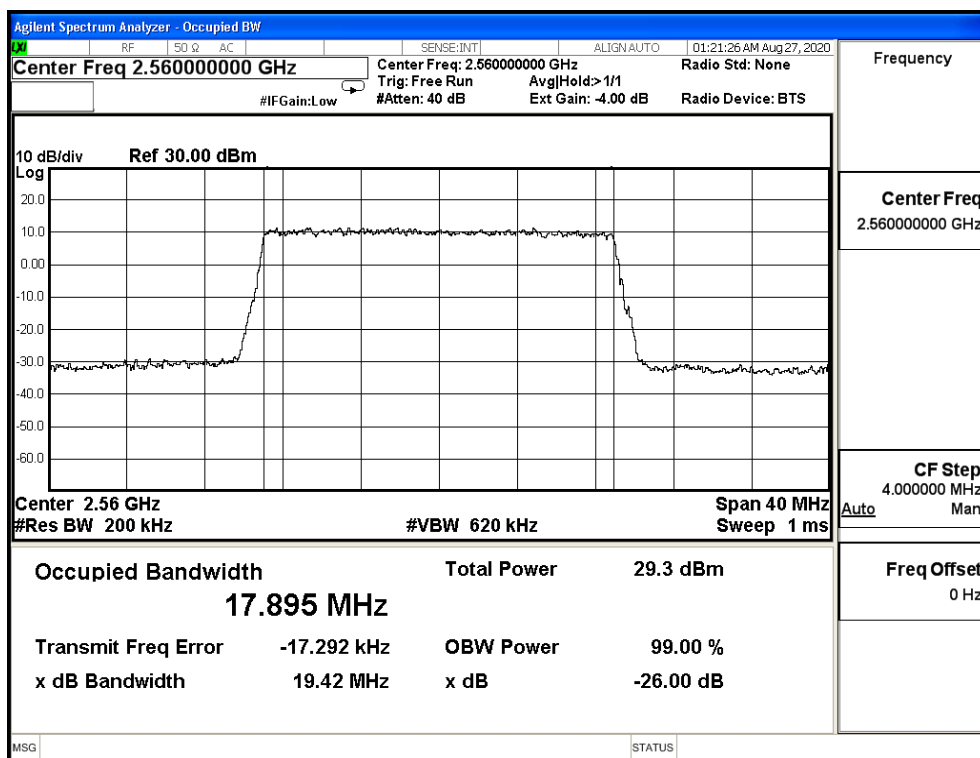


16QAM_CH20850_20M

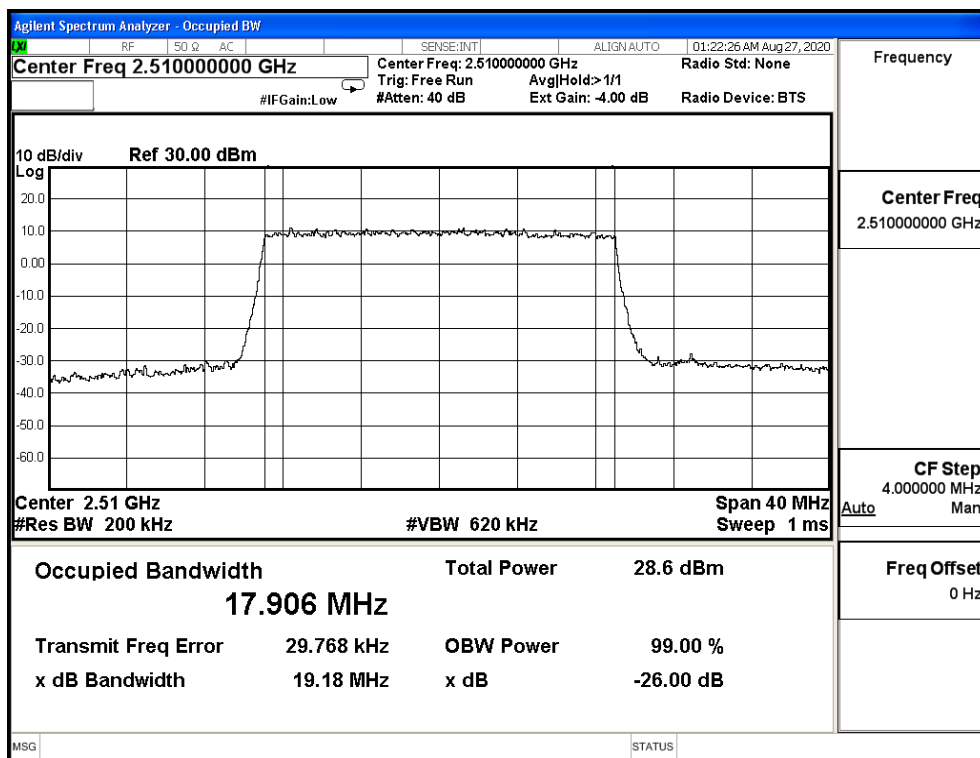


16QAM_CH21100_20M

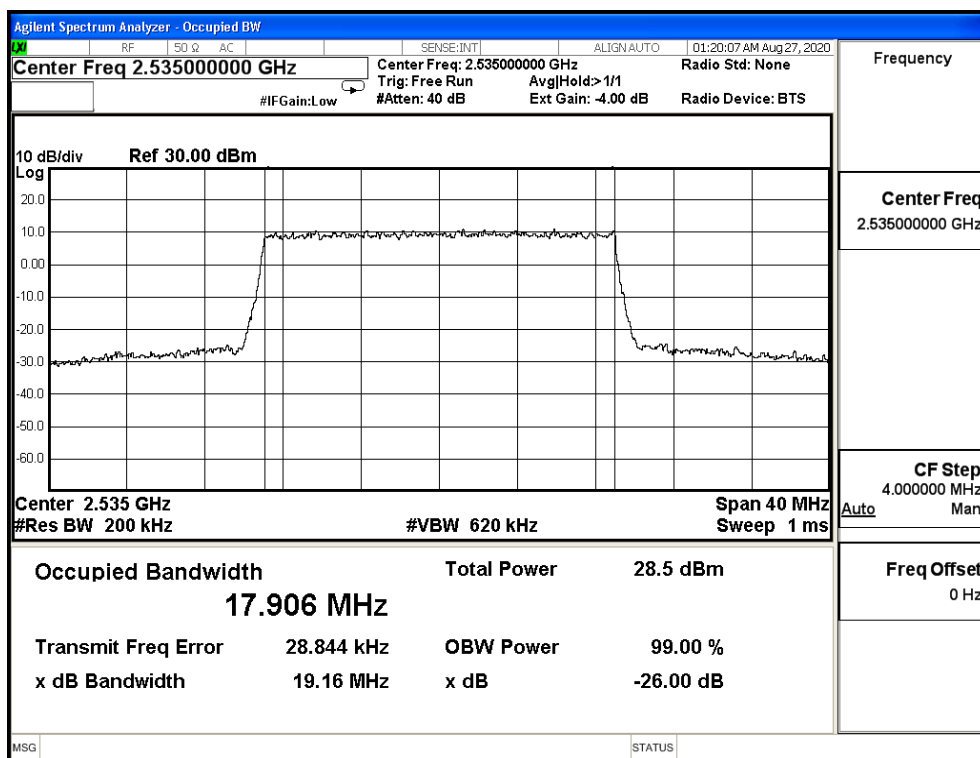


16QAM_CH21350_20M

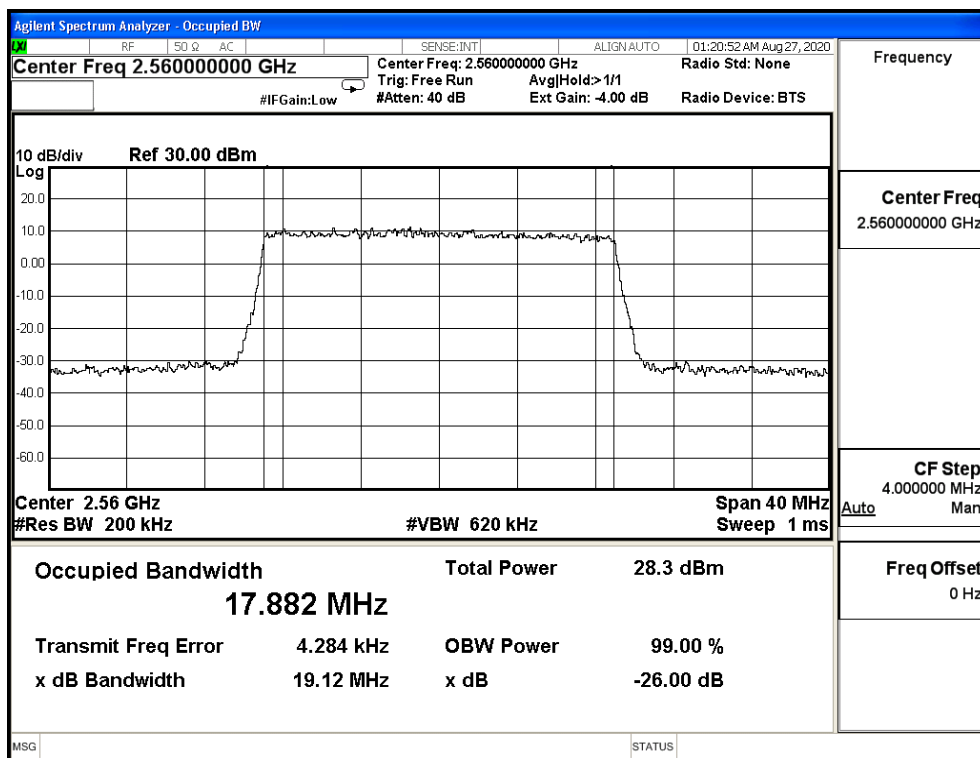


64QAM_CH20850_20M

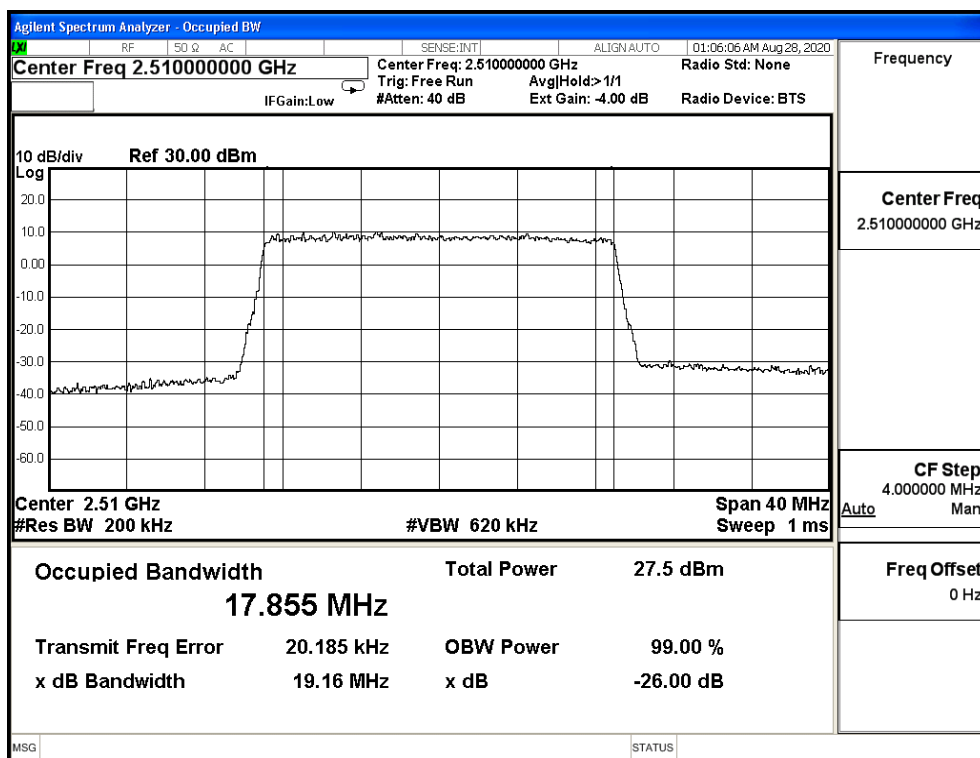

64QAM_CH21100_20M

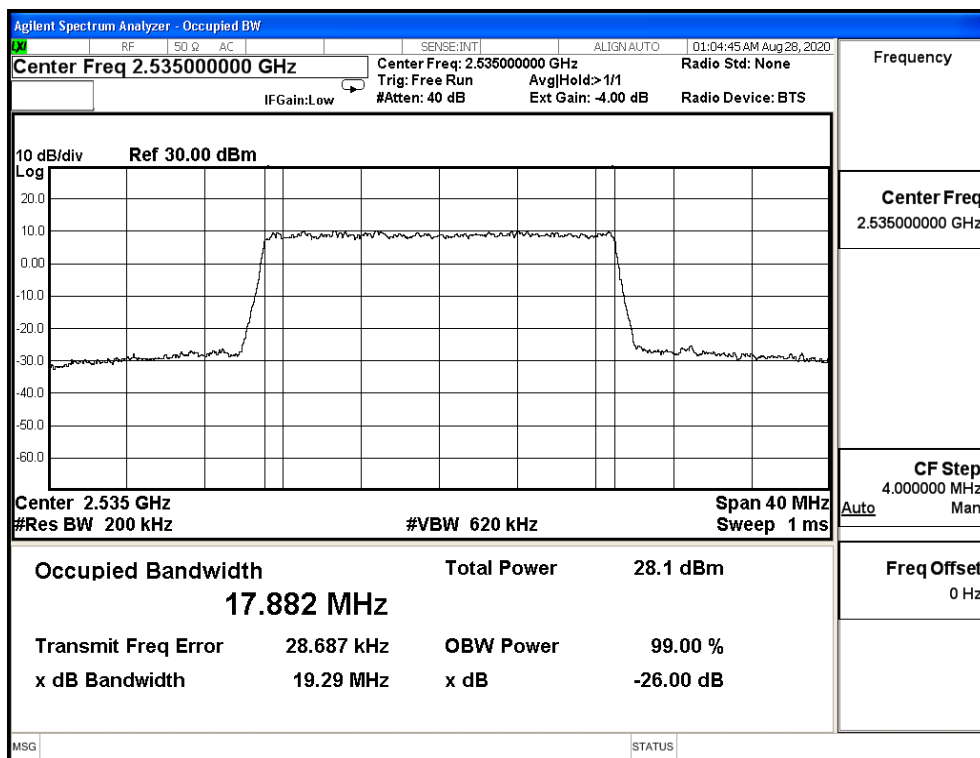

64QAM_CH21350_20M

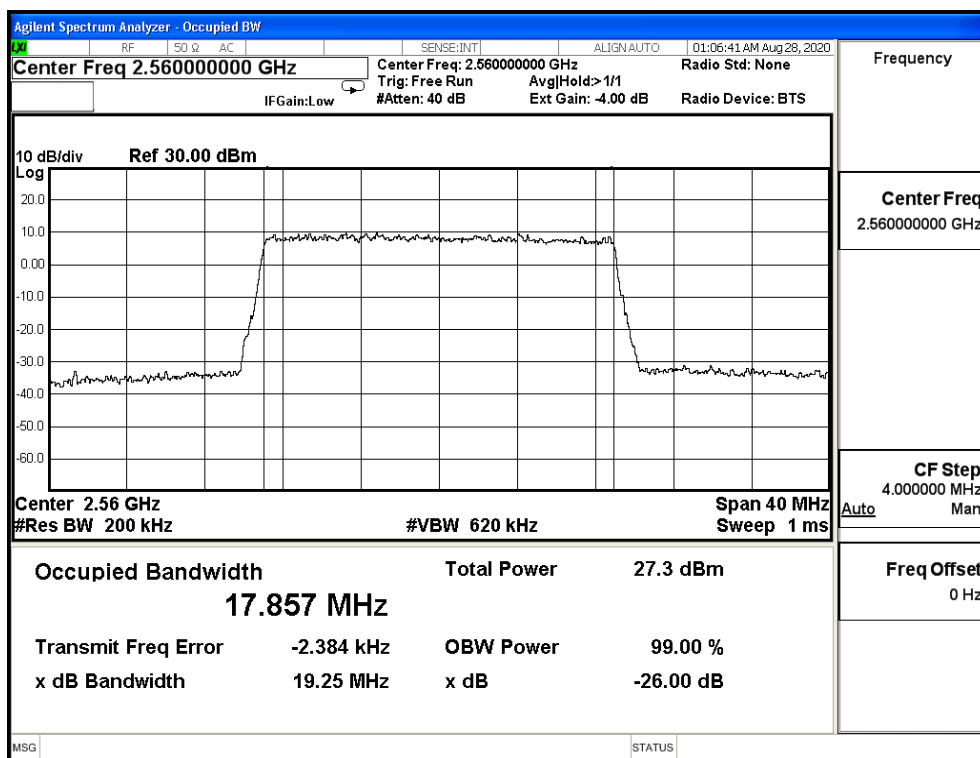


Product	Module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 5: LTE Band 12		
Date of Test	2020/09/02	Test Site	SR12-H
Temperature(°C)	24	Humidity (%RH)	60


Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
1.4M	QPSK	699.7	1.221	1.080	N/A
		707.5	1.221	1.078	N/A
		715.3	1.209	1.086	N/A
	16-QAM	699.7	1.200	1.079	N/A
		707.5	1.224	1.082	N/A
		715.3	1.222	1.081	N/A
	64-QAM	699.7	1.211	1.079	N/A
		707.5	1.212	1.079	N/A
		715.3	1.210	1.079	N/A
3M	QPSK	700.5	2.928	2.690	N/A
		707.5	2.937	2.686	N/A
		714.5	2.941	2.684	N/A
	16-QAM	700.5	2.950	2.685	N/A
		707.5	2.953	2.683	N/A
		714.5	2.938	2.681	N/A
	64-QAM	700.5	2.916	2.683	N/A
		707.5	2.912	2.684	N/A
		714.5	2.906	2.681	N/A
5M	QPSK	710.5	4.883	4.462	N/A
		707.5	4.877	4.481	N/A
		713.5	4.886	4.471	N/A
	16-QAM	710.5	4.911	4.477	N/A
		707.5	4.897	4.481	N/A
		713.5	4.833	4.464	N/A
	64-QAM	710.5	4.880	4.478	N/A
		707.5	4.890	4.479	N/A
		713.5	4.869	4.476	N/A

Bandwidth (MHz)	Modulation	Frequency (MHz)	Measure Level (MHz)		Limit (MHz)
			26dB BW	99% BW	
10M	QPSK	704.0	9.587	8.910	N/A
		707.5	9.708	8.944	N/A
		711.0	9.675	8.955	N/A
	16-QAM	704.0	9.578	8.920	N/A
		707.5	9.615	8.935	N/A
		711.0	9.674	8.953	N/A
	64-QAM	704.0	9.566	8.912	N/A
		707.5	9.577	8.925	N/A
		711.0	9.627	8.943	N/A


QPSK_CH23017_1.4M

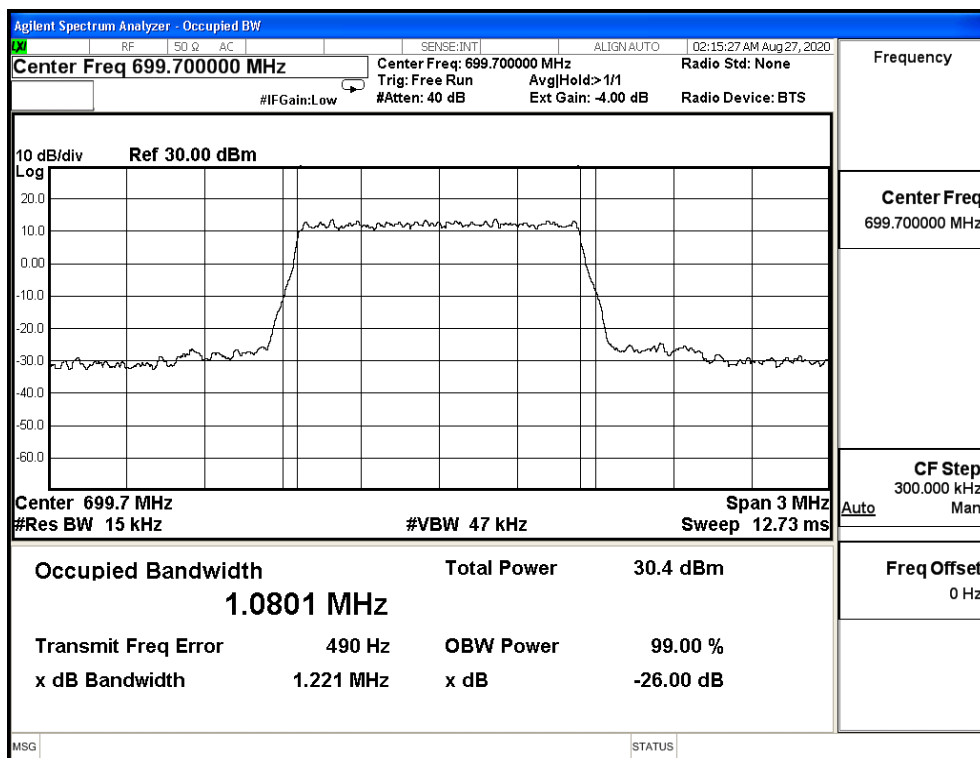


QPSK_CH23095_1.4M

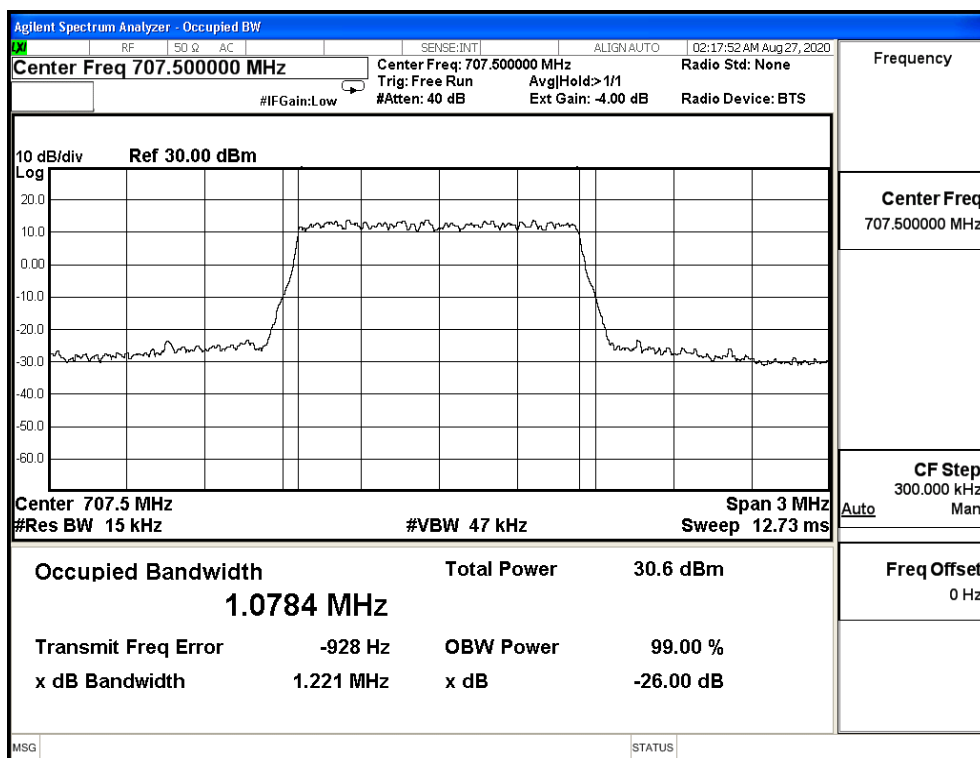


QPSK_CH23173_1.4M

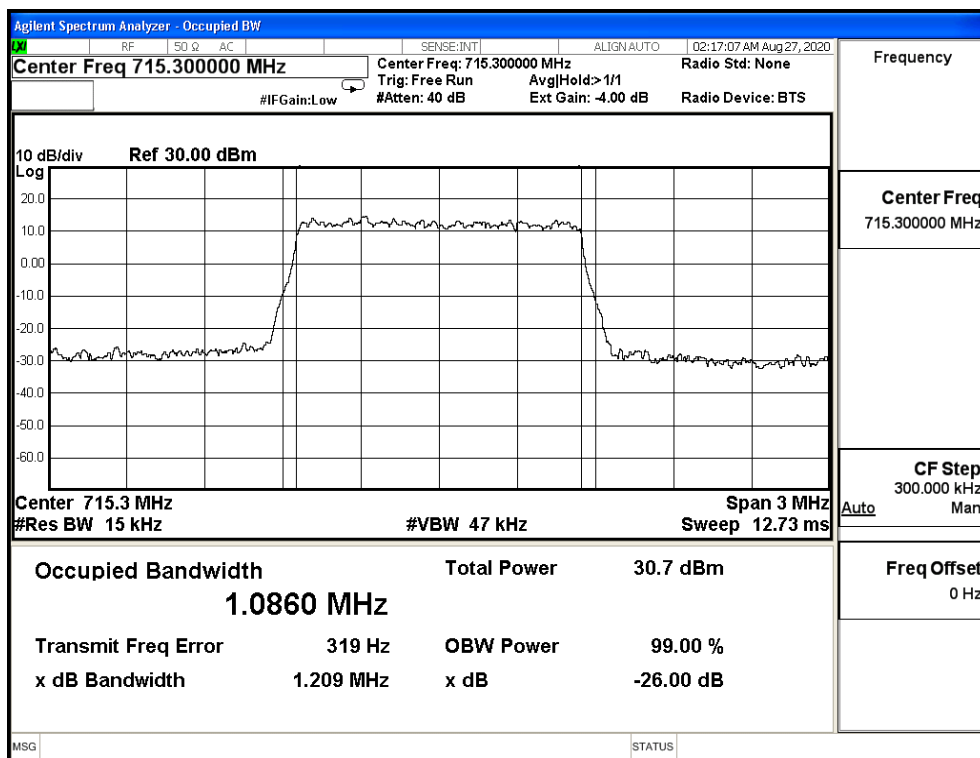


16QAM_CH23017_1.4M

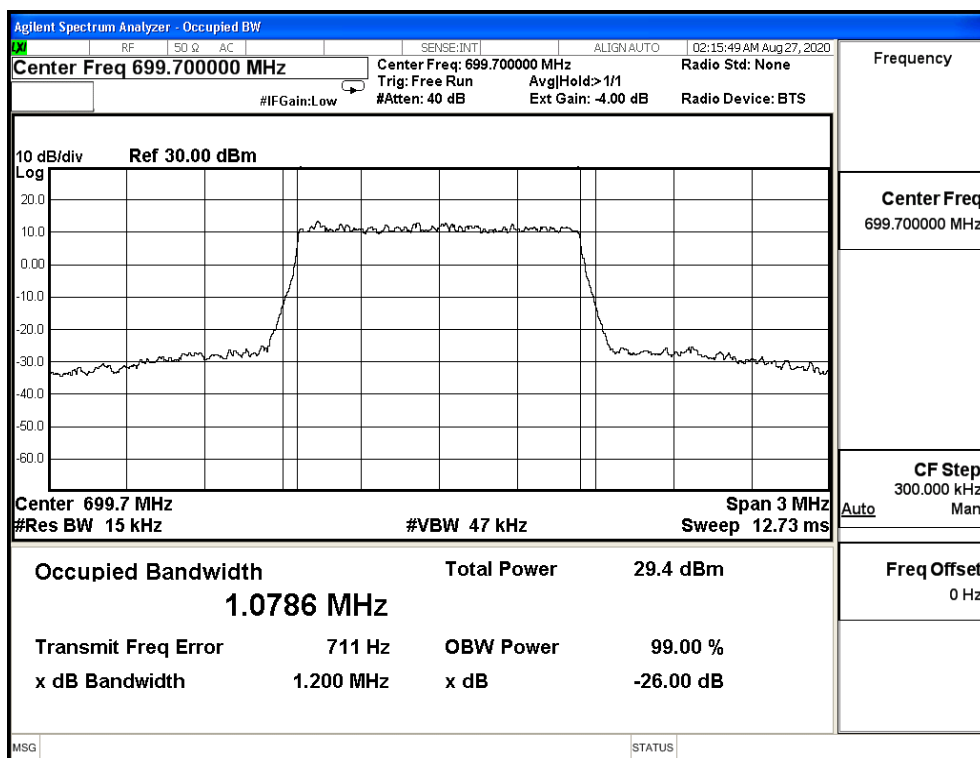


16QAM_CH23095_1.0M

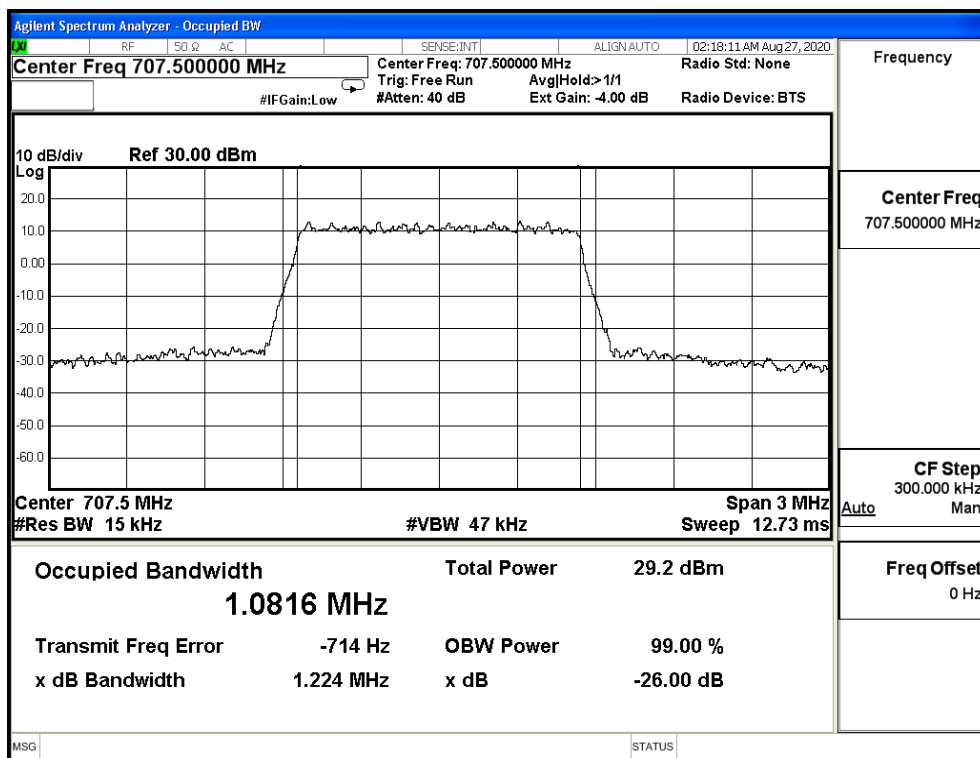


16QAM_CH23173_1.4M

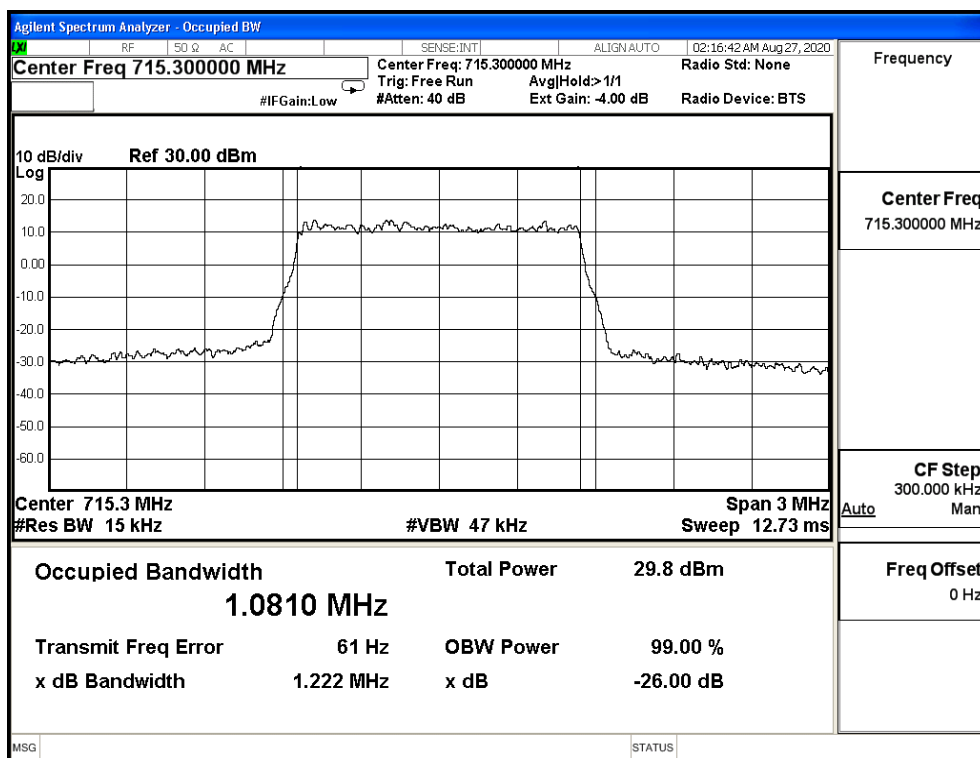


64QAM_CH23017_1.4M

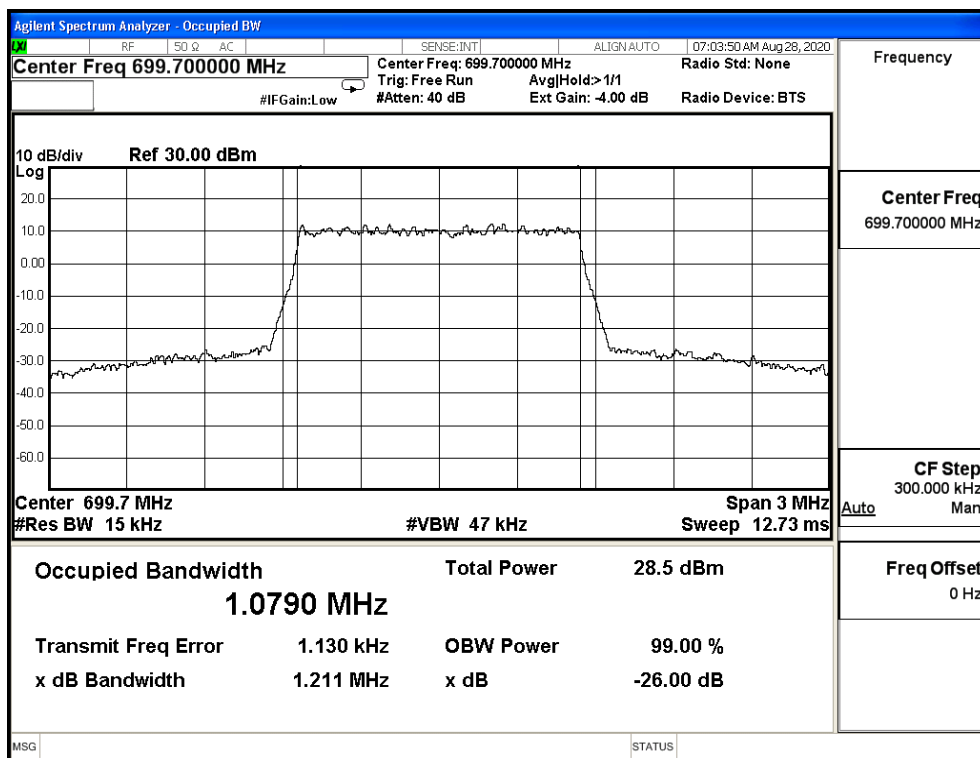


64QAM_CH23095_1.4M

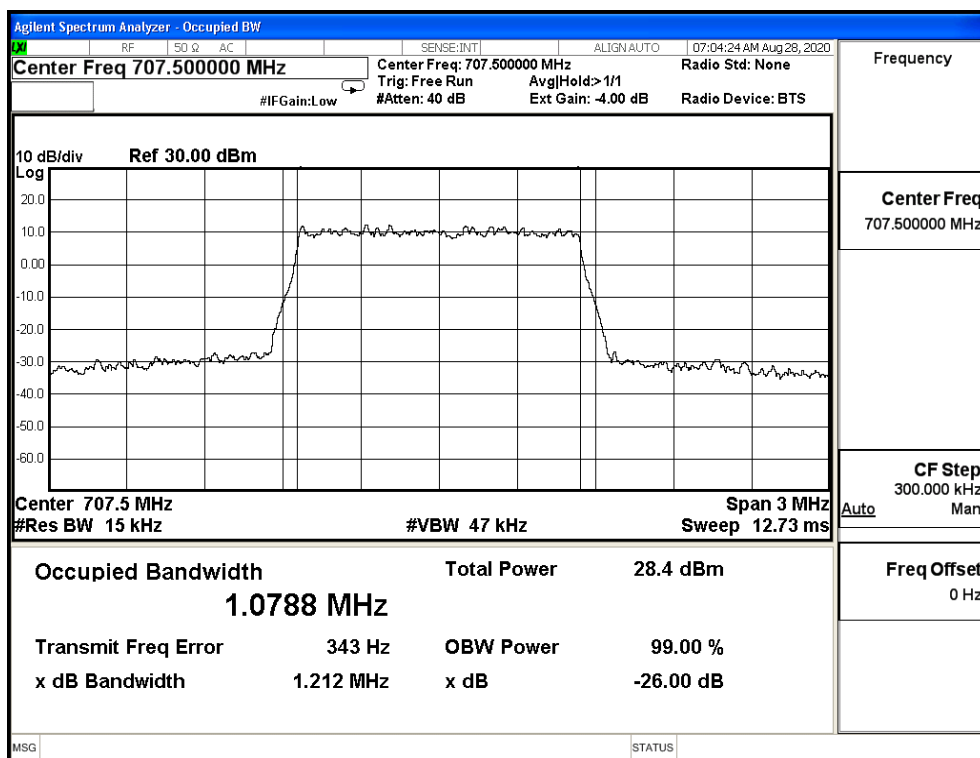


64QAM_CH23173_1.4M

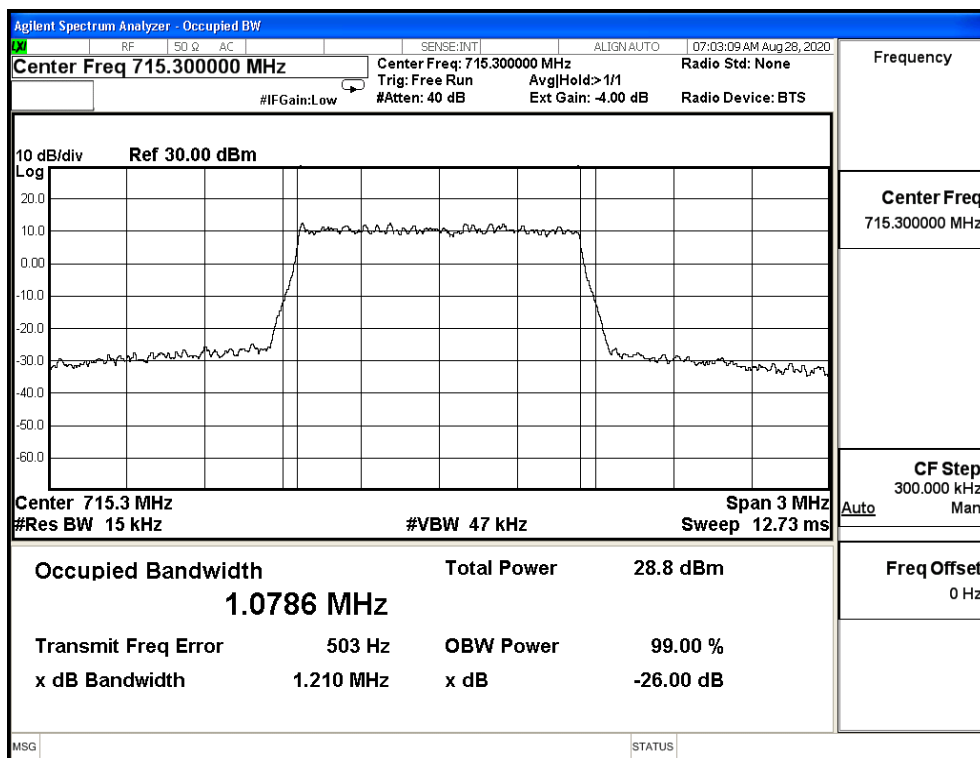


QPSK_CH23025_3M

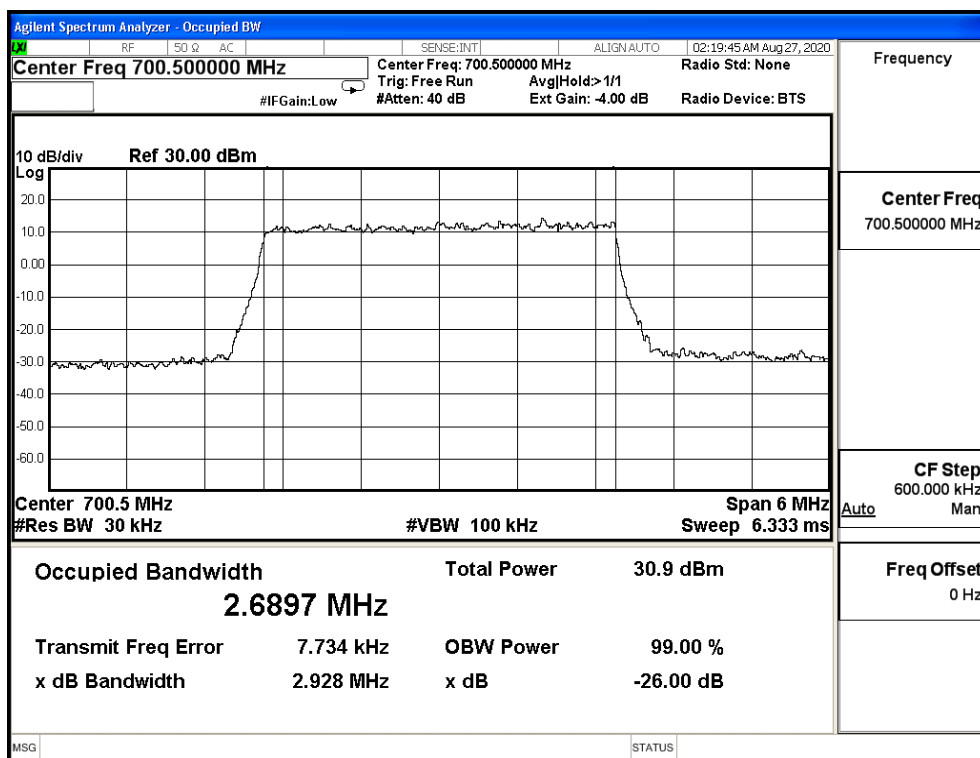


QPSK_CH23095_3M

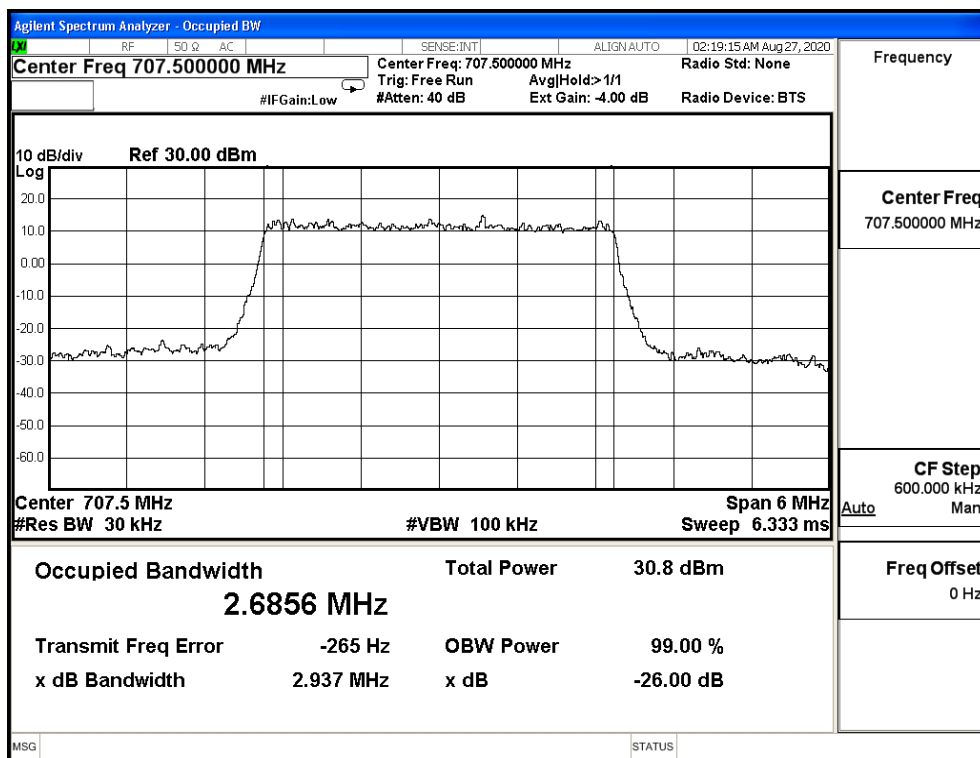


QPSK_CH23165_3M

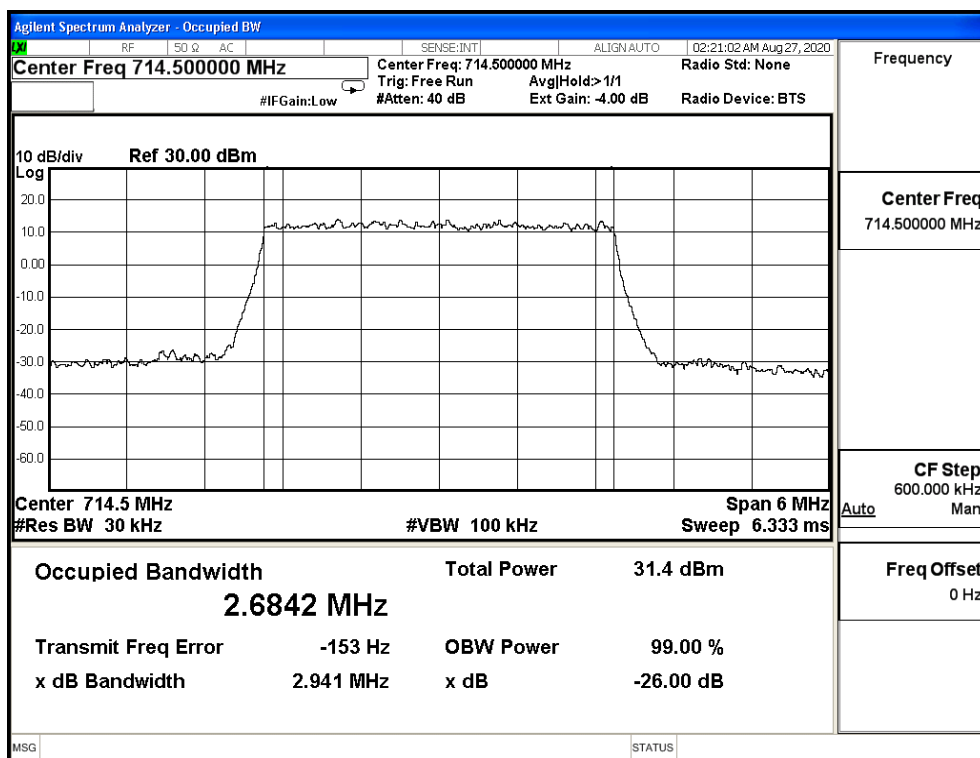


16QAM_CH23025_3M

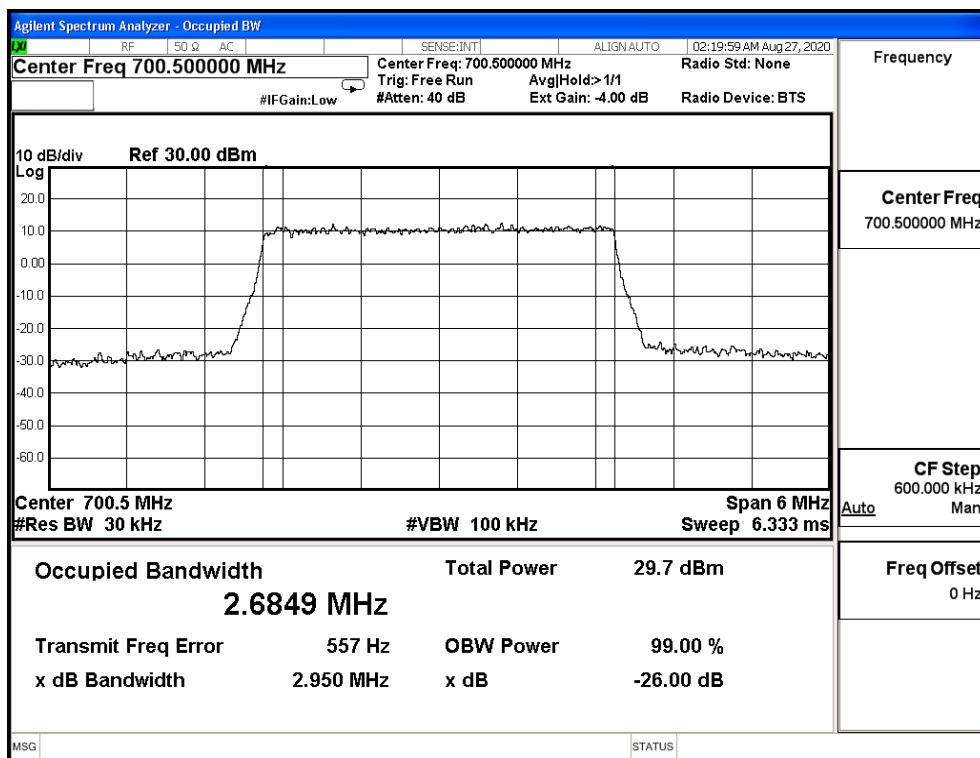


16QAM_CH23095_3M

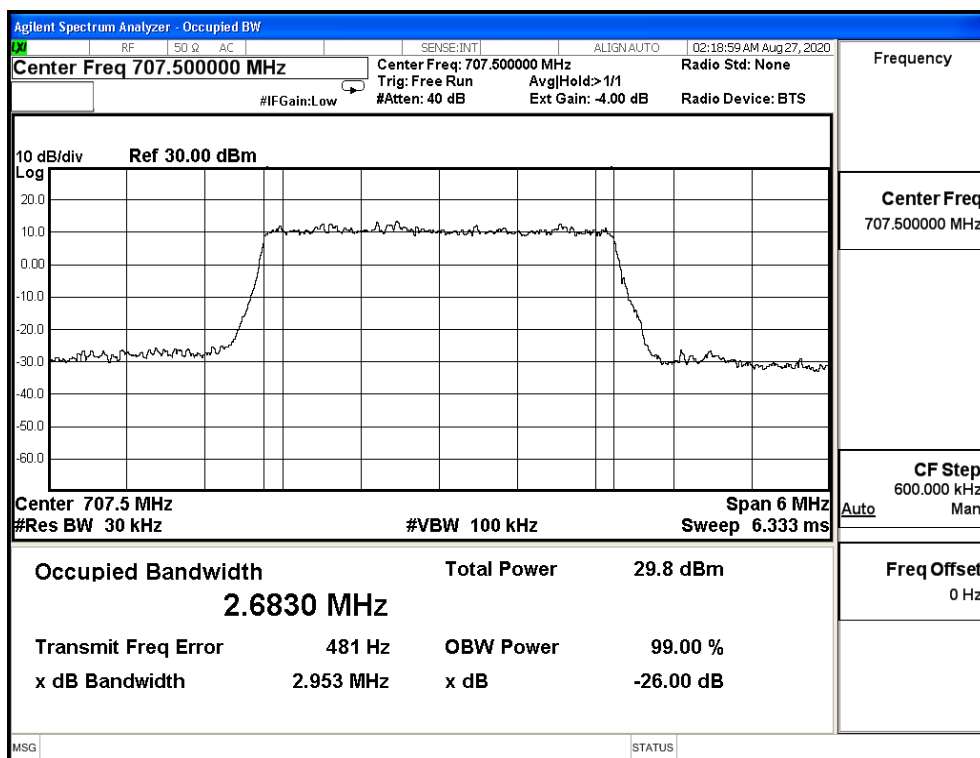


16QAM_CH23165_3M

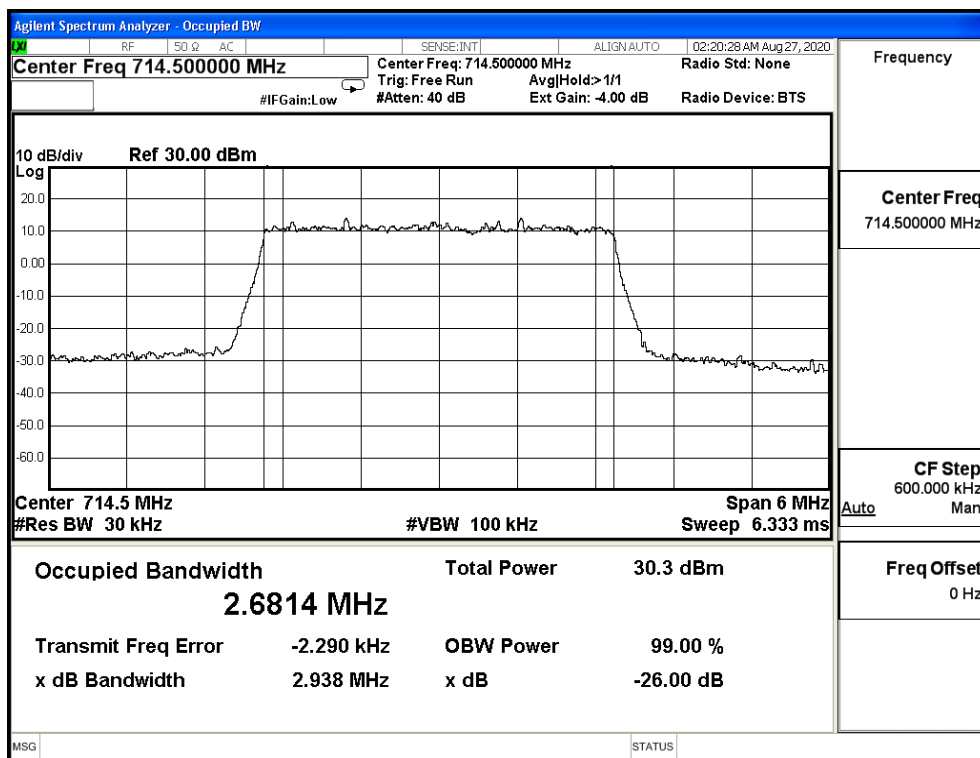


64QAM_CH23025_3M

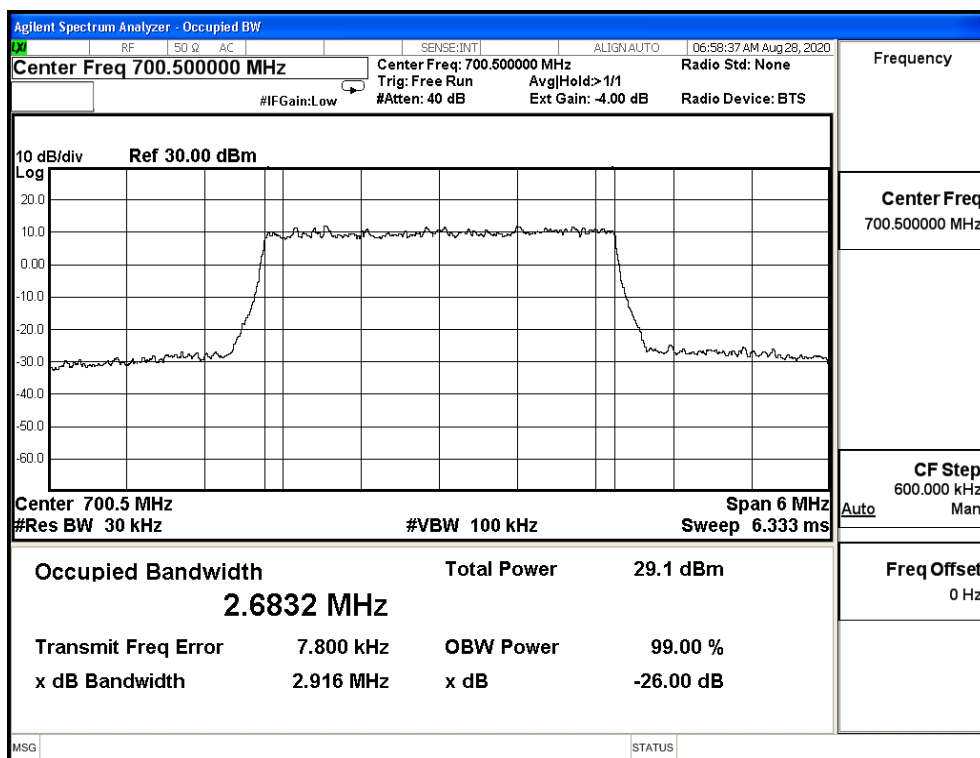


64QAM_CH23095_3M

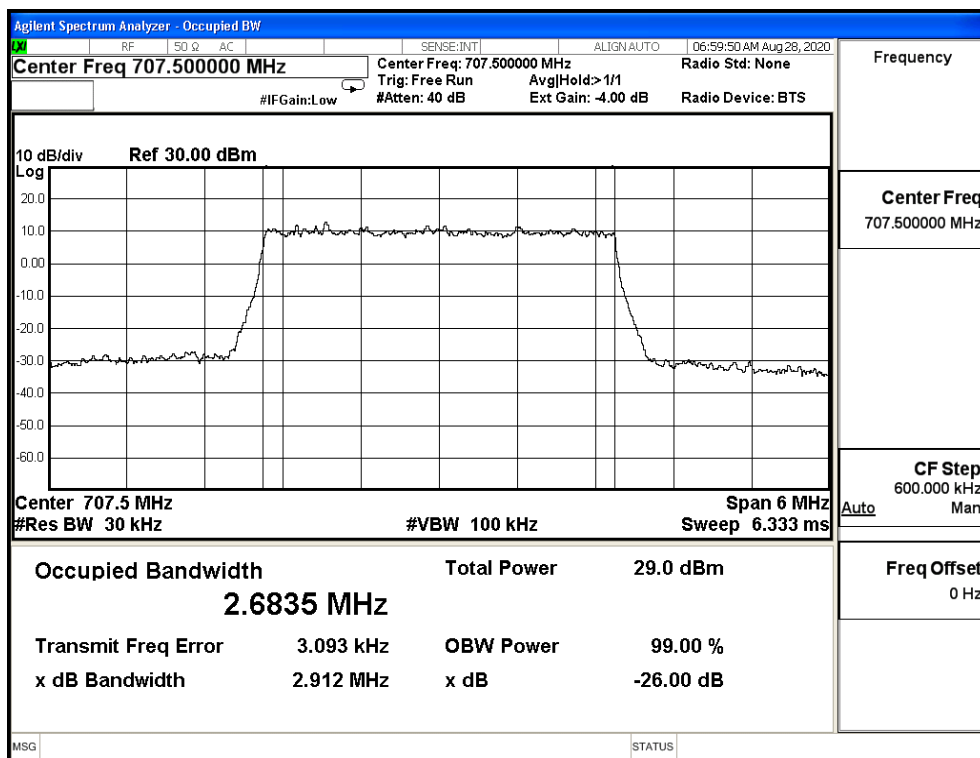


64QAM_CH23165_3M

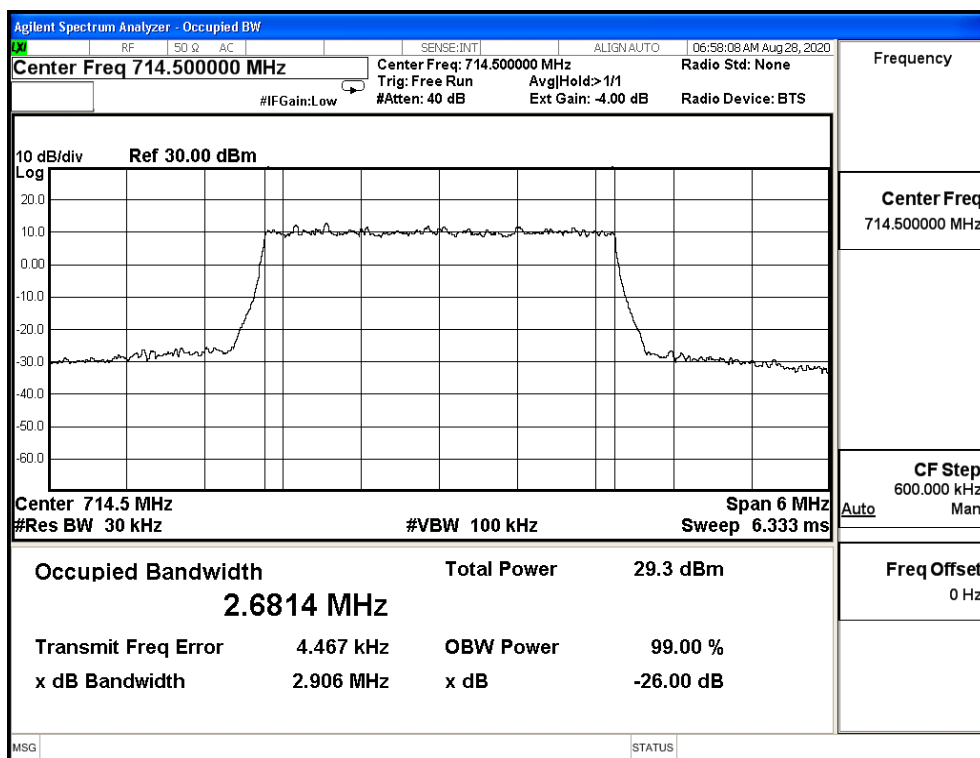


QPSK_CH23035_5M

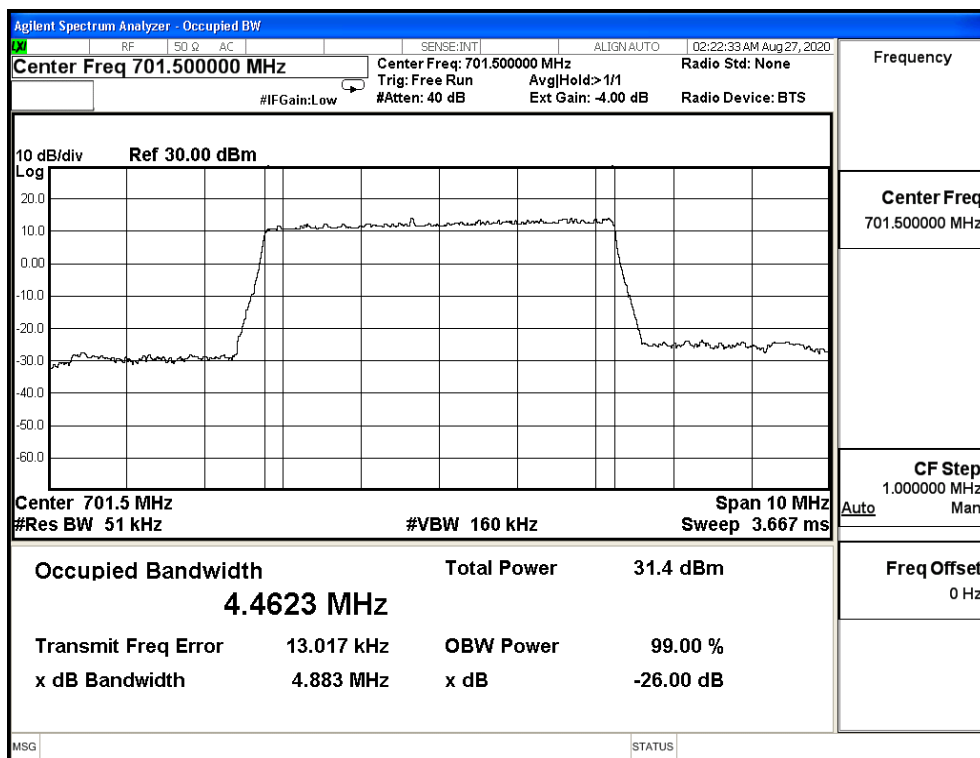


QPSK_CH23095_5M

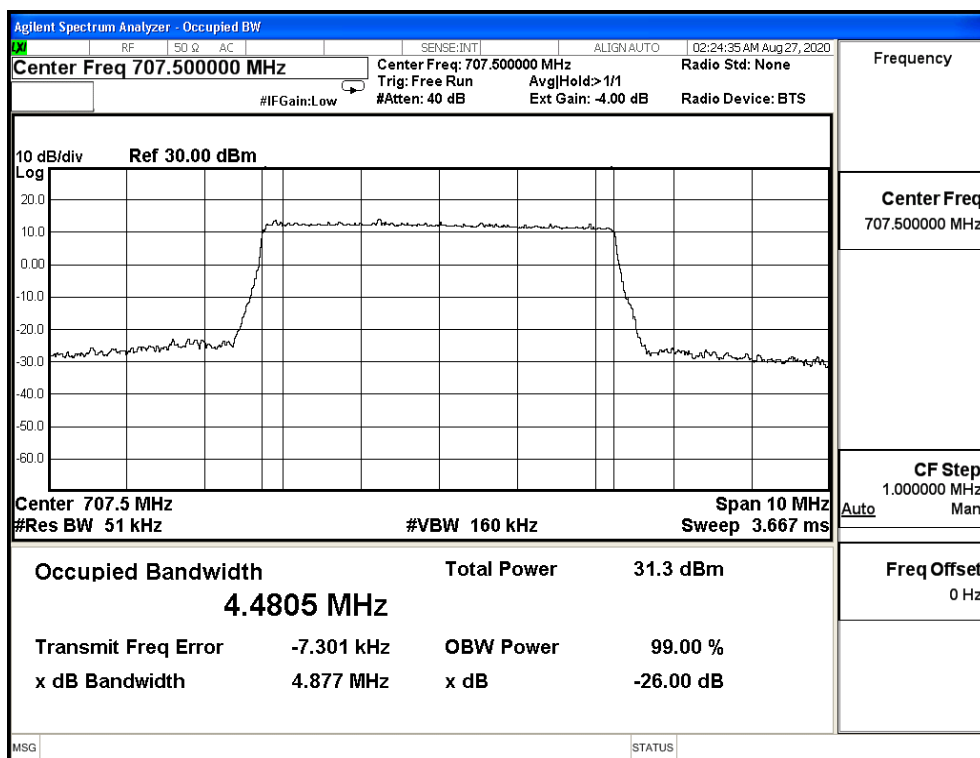


QPSK_CH23155_5M

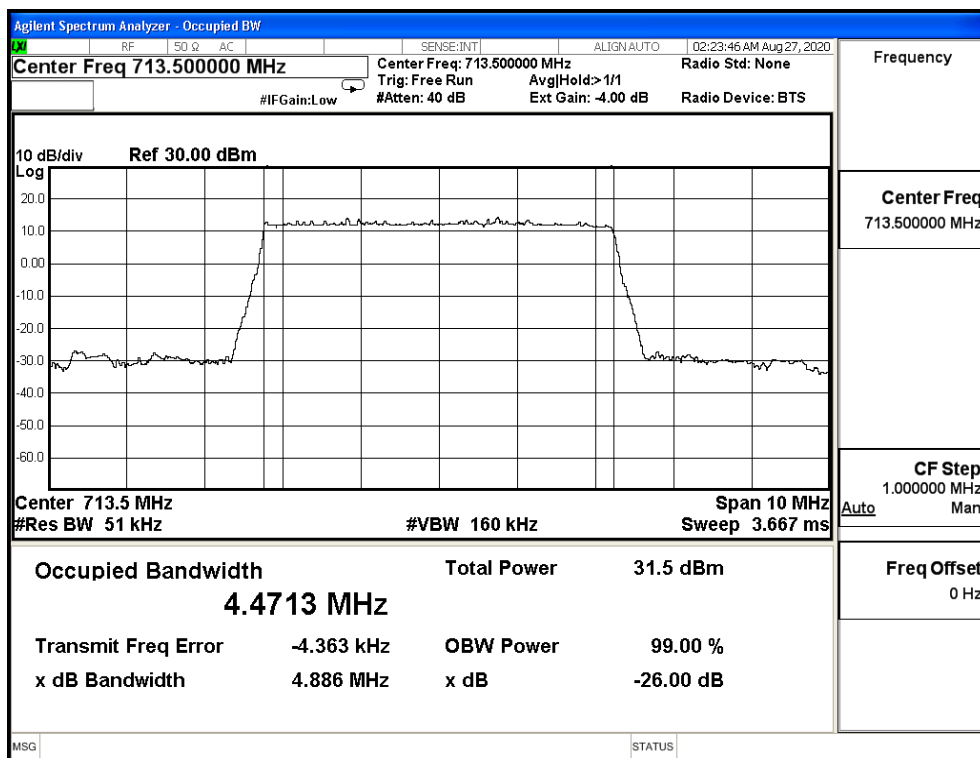


16QAM_CH23035_5M

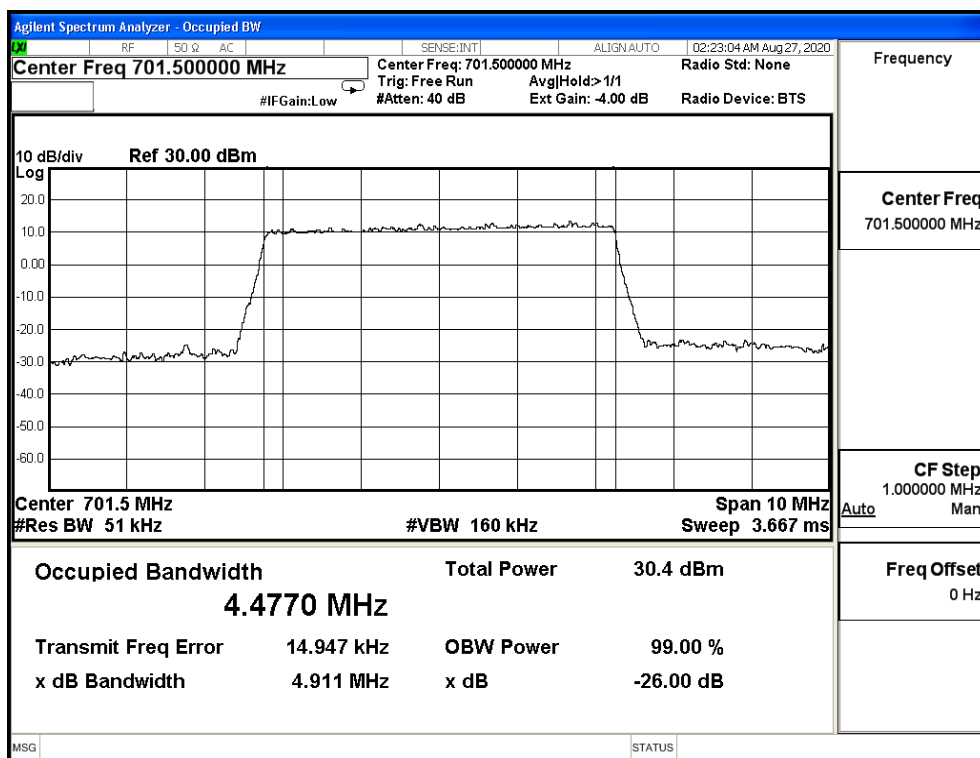


16QAM_CH23095_5M

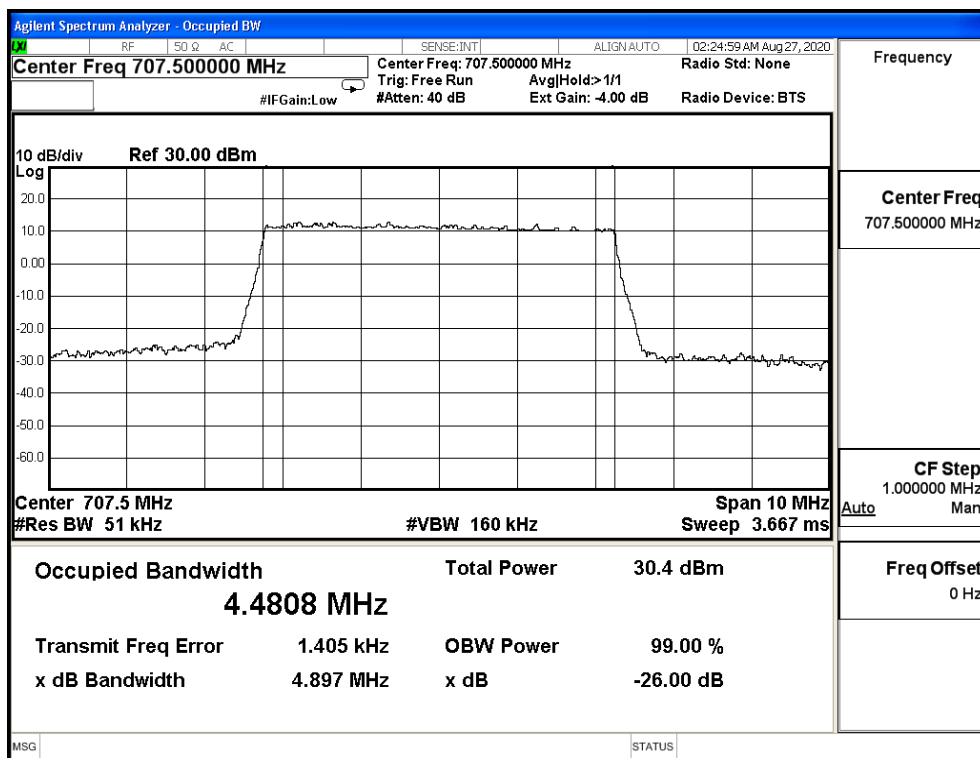


16QAM_CH23155_5M

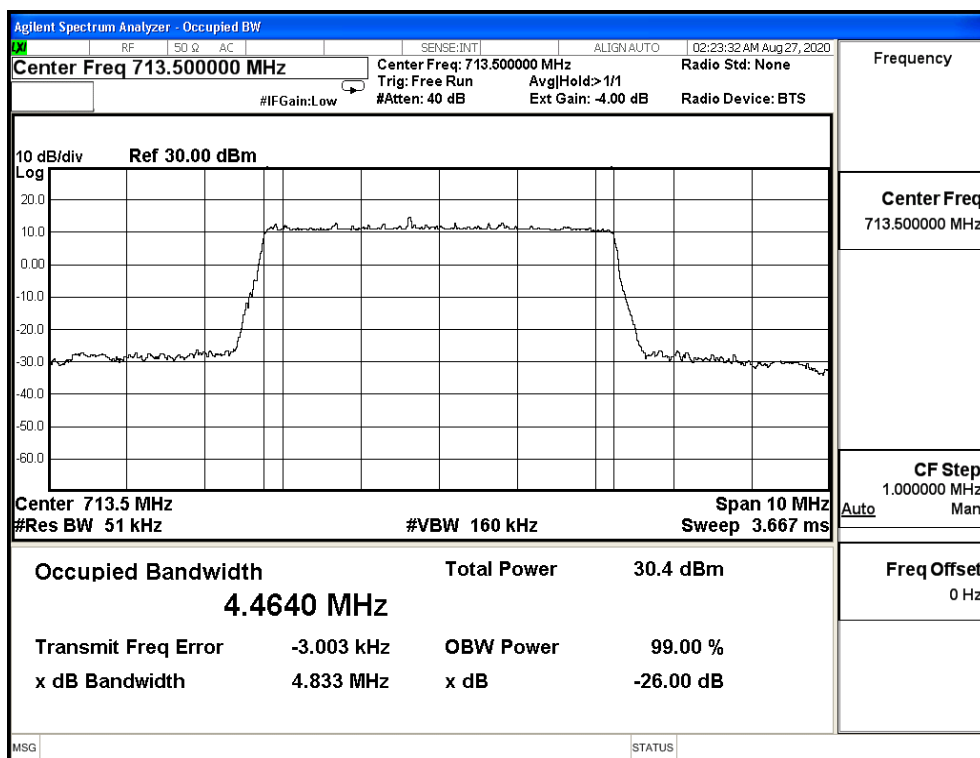


64QAM_CH23035_5M

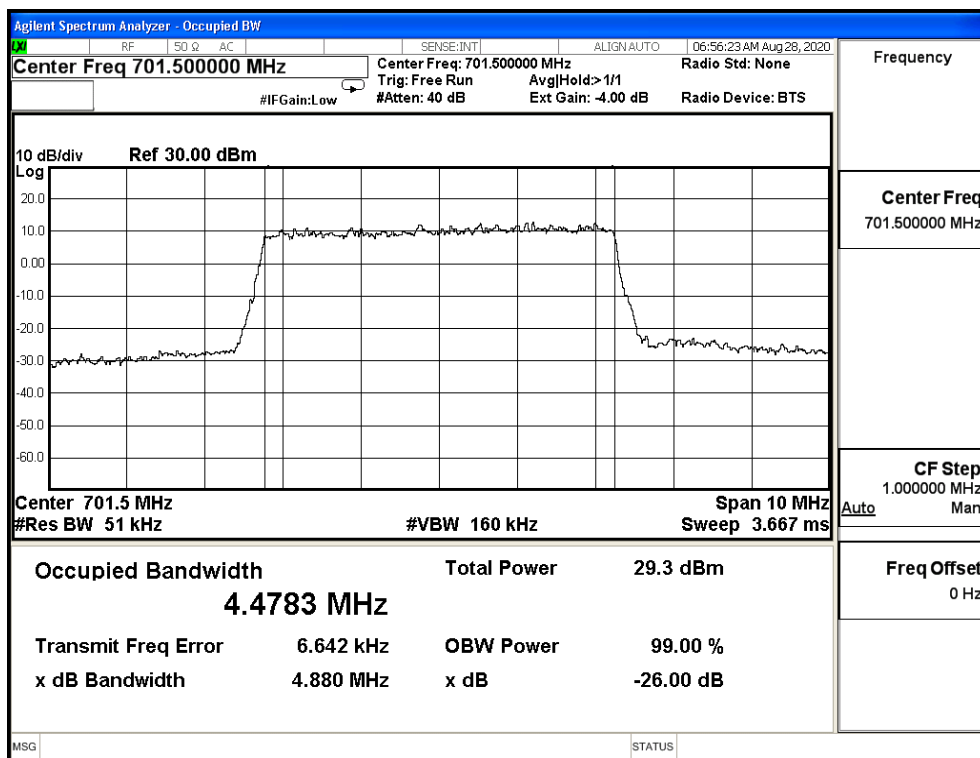


64QAM_CH23095_5M

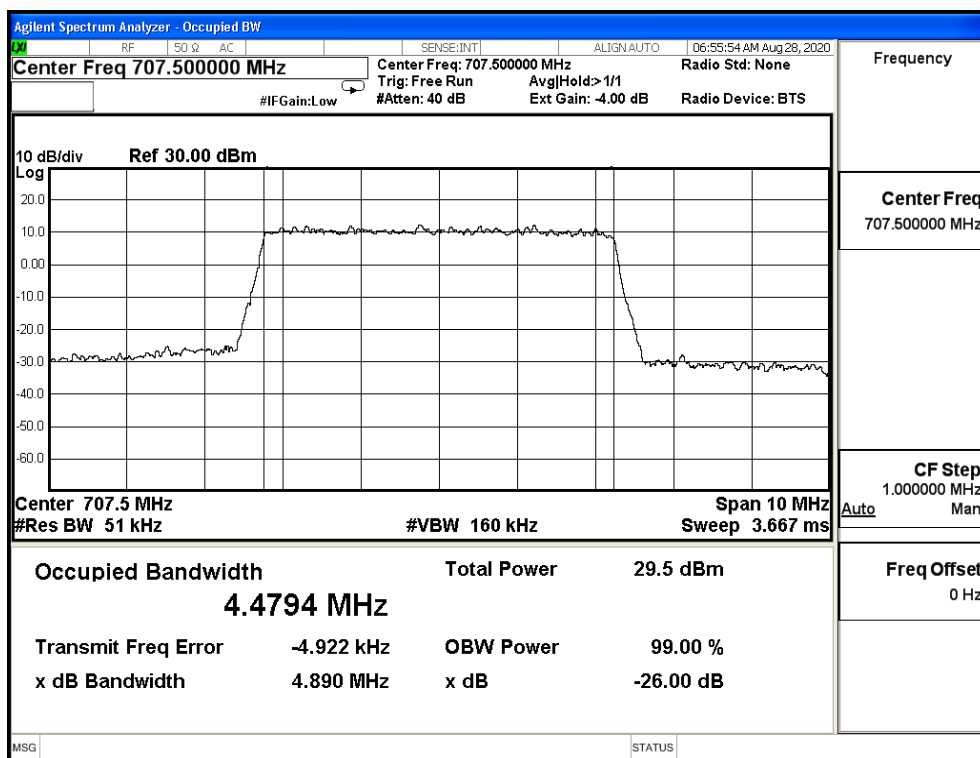


64QAM_CH23155_5M

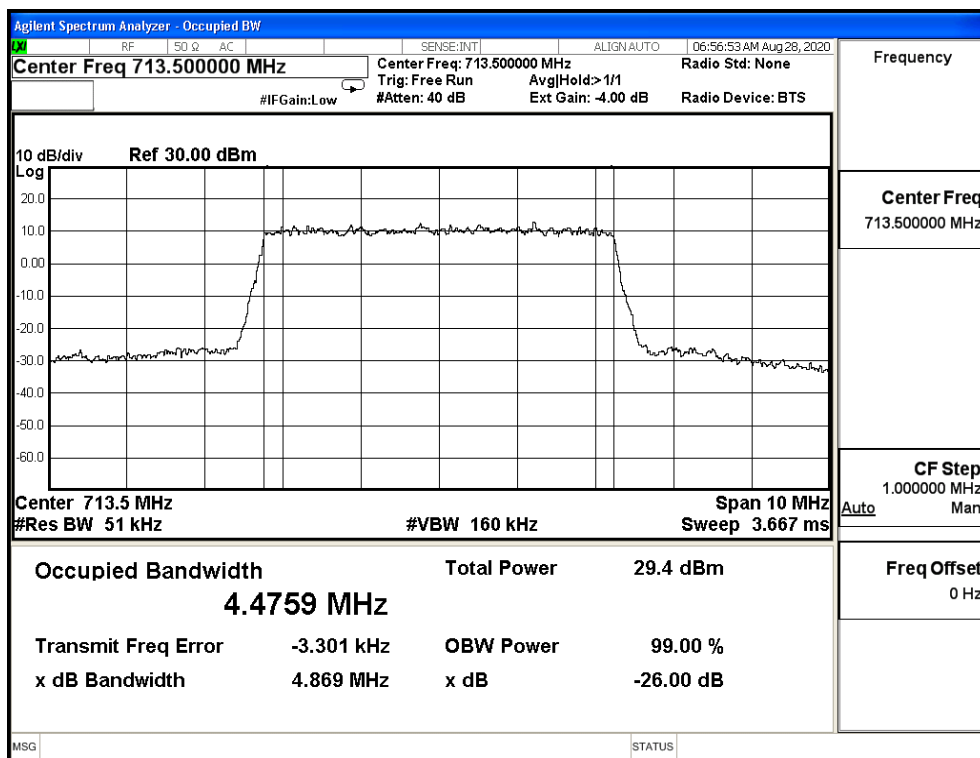


QPSK_CH23060_10M

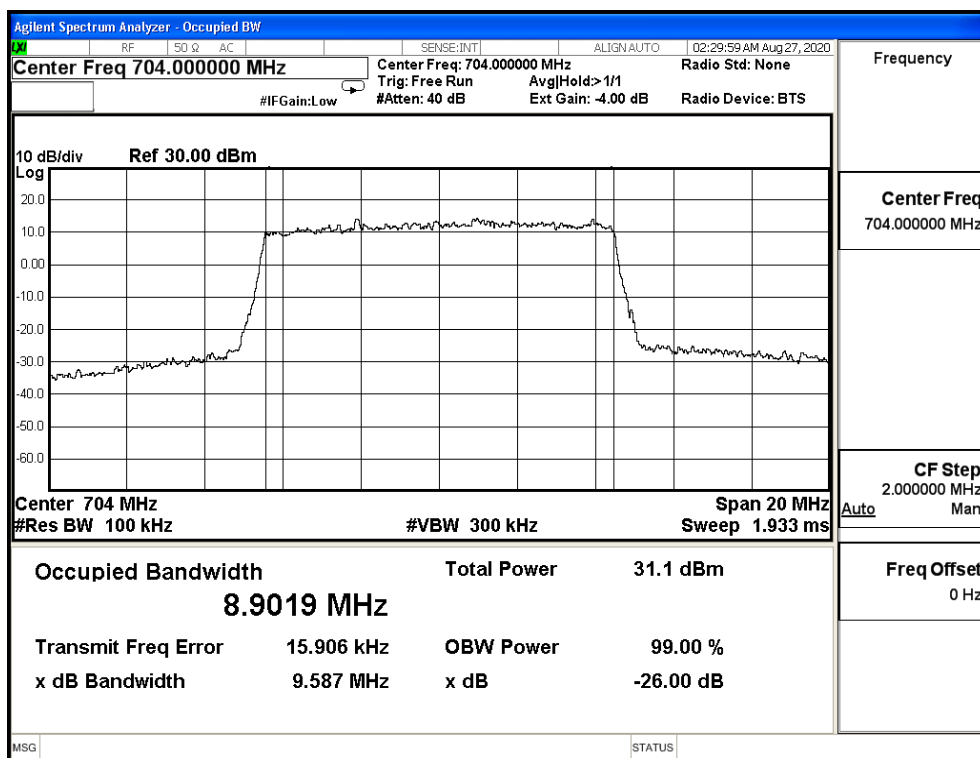


QPSK_CH23095_10M

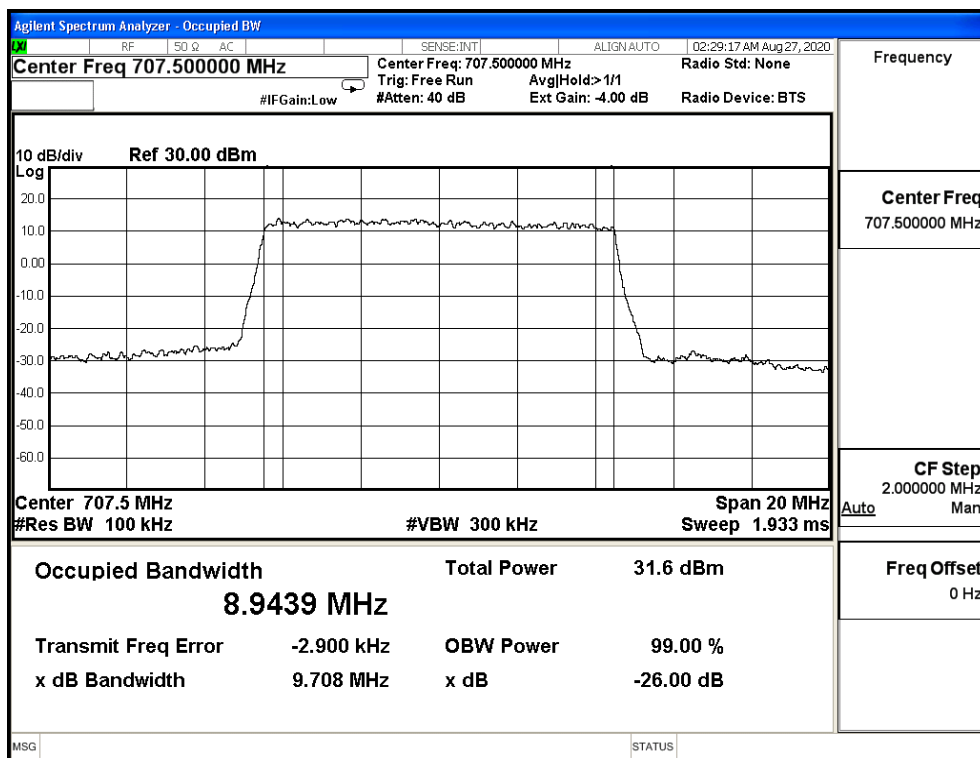


QPSK_CH23130_10M

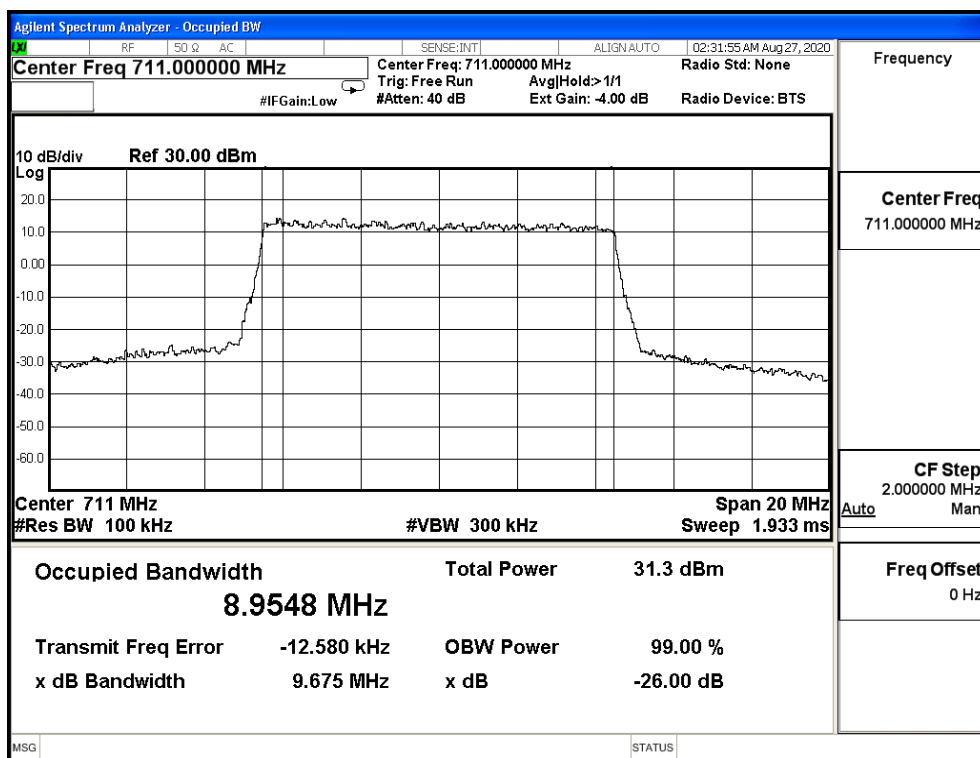


16QAM_CH23060_10M

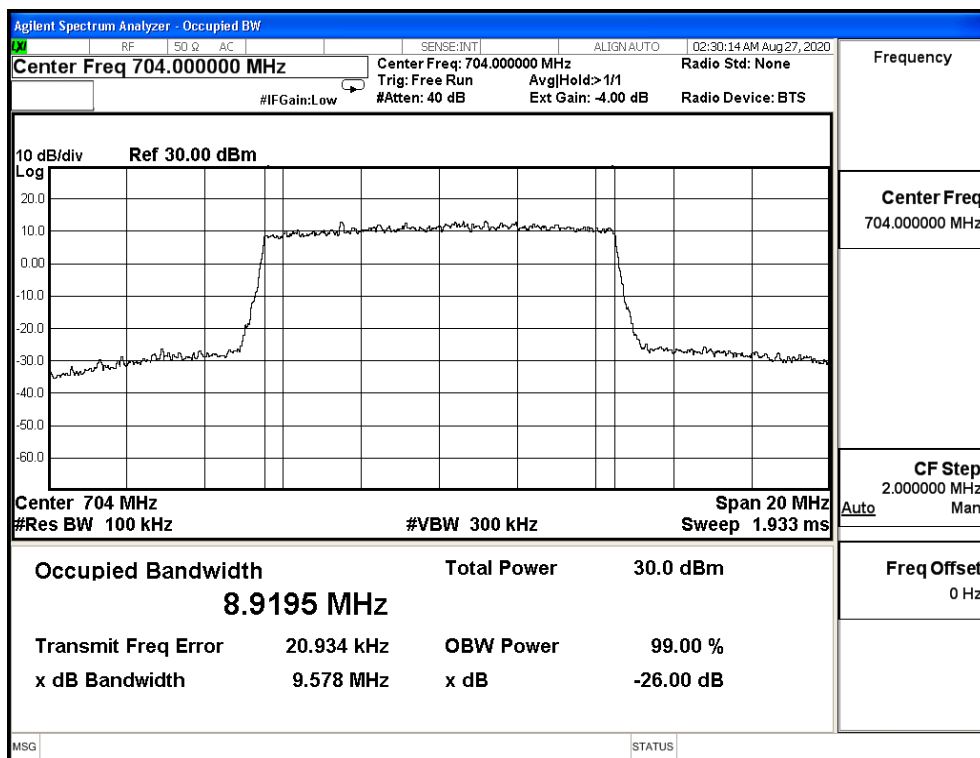


16QAM_CH23095_10M

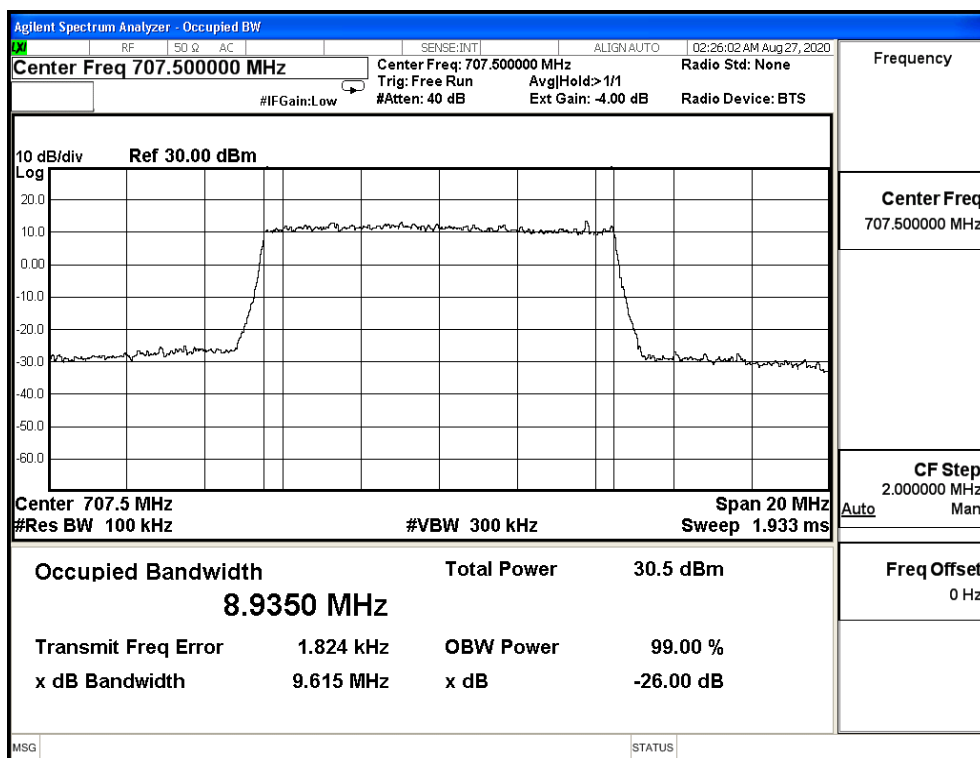


16QAM_CH23130_10M

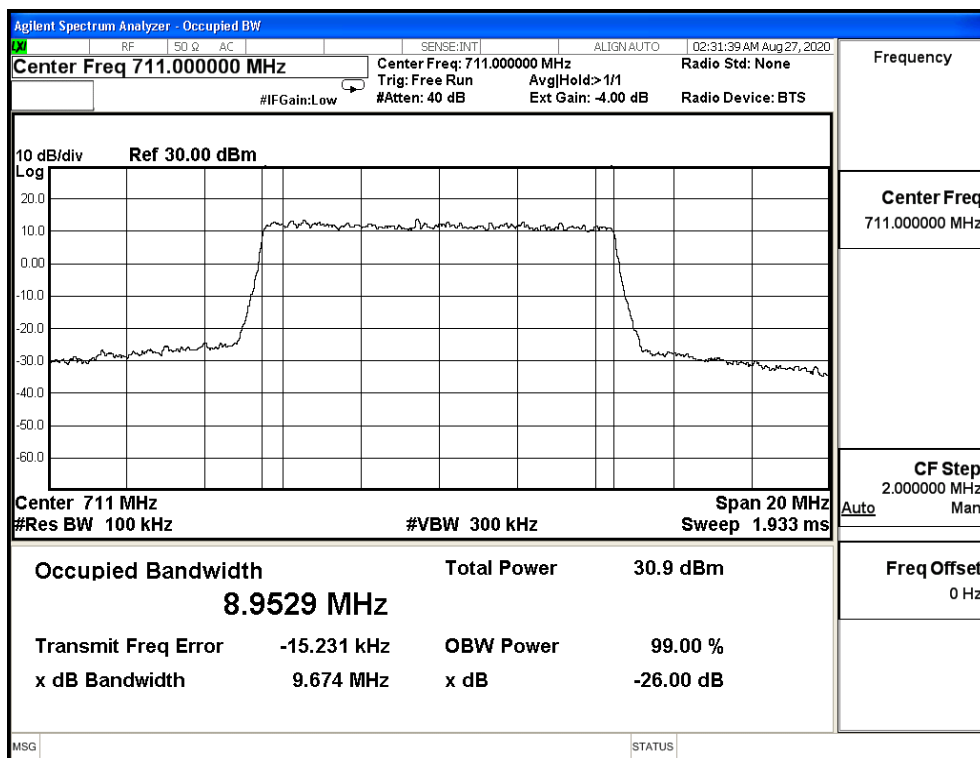

64QAM_CH23060_10M

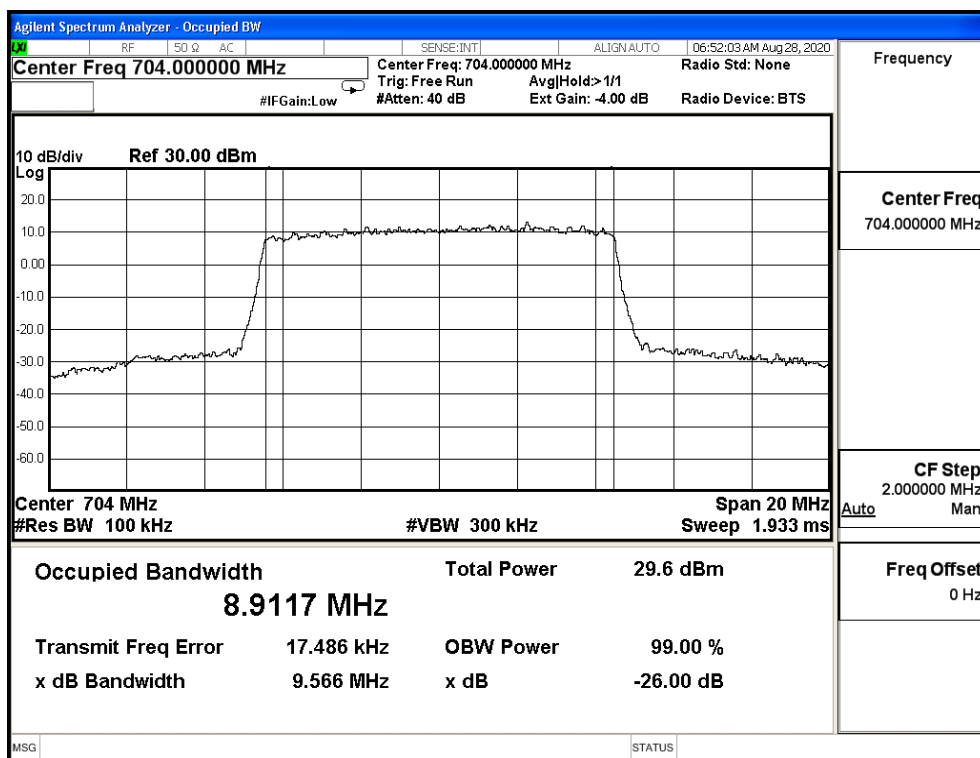

64QAM_CH23095_10M

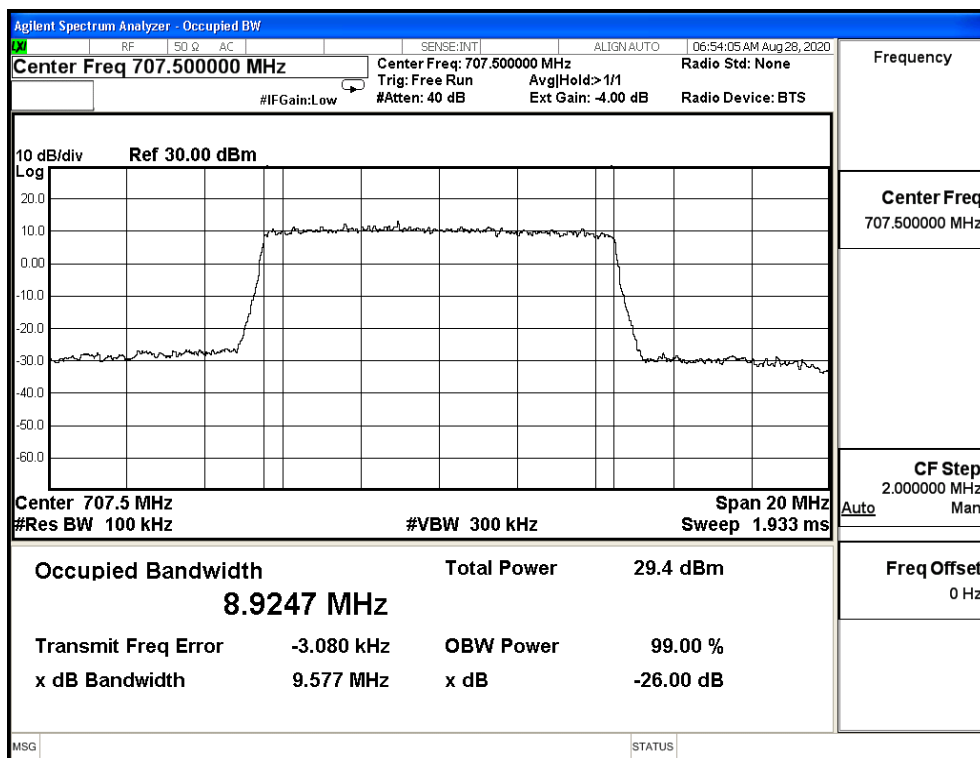

64QAM_CH23130_10M

