

承 认 书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER): Dongguan Ziwuniu Intelligent Technology Co., Ltd(子 午 牛 科 技 有 限 公 司)

客户料号 (CUSTOMER P/N)

品名 (DESCRIPTION): 无线充线圈(Wireless charging coil) DATE:2025/2/13

规格 (SPECIFICATION): G43.8开槽 带背胶0.08*24*2P/内径13.5mm 38mm长 REV.NO.:A0

鸿日昇威科技承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
品质	董晚红	吕惠	韦函满	
工程	何伟华	韦立红	韦立红	

备注:

子午牛科技承认签核、盖章

部门	确认/日期	审核/日期	批准/日期	(盖公司公章)
开发工程师				
采购				
品质				

备注:

深圳市鸿日昇威科 技 有 限 公 司


HRSW ELECTRONICS CO.,LTD

ADD: 深圳市龙华新区观澜环观中路48号1栋2楼
Floor 2, Building 1, 48 Huanguan Middle Road, Guanlan, Longhua New District, Shenzhen


TEL: 13682412162 FAX: +86-0755-28015170

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

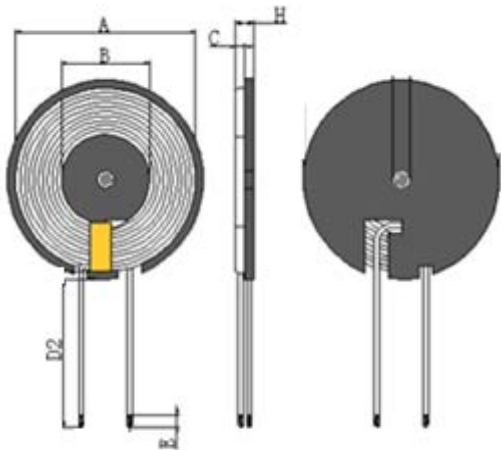

2. SCHEMATICS:



- 1.Coil magnet, magnet size 43.5±0.5mm, ,thick 0.5±0.5mm Open L groove.
- 2.Coil outlet position Wrap 1-2Ts of adhesive paper;
- 3.The back of the magnet is attached with back glue

A	B	C	D2	E	H			
43.5±0.5	13.5±1	0.5±0.5	38±3	3.5±2	1.7MAX			

3.WINDING:

ST EP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMAR K
N1	S-F	0.08*24*2P 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	Q值		
TES T	线圈加磁片	S-F	S-F		
CON	100KHz, 0.25V	AT 25℃	100KHz, 0.25V		
SPEC	6.8uH±10%	80mΩ Max	75		

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	热风线0.08*24*2股	热风线/Hot air line 0.08*24*2股	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	无铅锡条/Lead-free tin strip	QIAODO	
3	Magnetic disc	43.5*0.5锰锌硬磁片开L槽/L groove for MN-Zn hard magnetic sheet	TAIYI CO.,LTD	
4	glue	黄胶9999/Yellow glue 9999	LIANCHENG CO.,LTD	
5	High temperature adhesive paper	8mm宽高温胶纸/Wide high temperature adhesive paper	CUDAK CO.,LTD	
6	Back adhesive	磁片背面无孔白背胶/There is no hole on the back of the magnet	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	Magnetic suction coil
DRAWN BY	CHECKED BY	APPROVED BY	
何伟华	韦立红	韦立红	