

FCC Test Report

(PART 27)

Report No.: RF180920C21-10

FCC ID: A4RG020E

Test Model: G020E

Received Date: Sep. 21, 2018

Test Date: Oct. 05, 2018 ~ Nov. 01, 2018

Issued Date: Dec. 27, 2018

Applicant: Google LLC

Address: 1600 Amphitheatre Parkway, Mountain View, CA 94043, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

Test Location (2): B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231,
Taiwan, R.O.C

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	11
3.4 EUT Operating Conditions	15
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Output Power Measurement	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures	16
4.1.3 Test Setup	17
4.1.4 Test Results	18
4.2 Modulation Characteristics Measurement	33
4.2.1 Limits of Modulation Characteristics	33
4.2.2 Test Setup	33
4.2.3 Test Procedure	33
4.2.4 Test Results	34
4.3 Frequency Stability Measurement	37
4.3.1 Limits of Frequency Stability Measurement	37
4.3.2 Test Procedure	37
4.3.3 Test Setup	37
4.3.4 Test Results	38
4.4 Occupied Bandwidth Measurement	50
4.4.1 Limits of Occupied Bandwidth Measurement	50
4.4.2 Test Procedure	50
4.4.3 Test Setup	50
4.4.4 Test Results	51
4.5 Out-of-Band Emissions Measurement	63
4.5.1 Limits of Out-of-Band Emissions Measurement	63
4.5.2 Test Setup	63
4.5.3 Test Procedures	63
4.5.4 Test Results	64
4.6 Peak to Average Ratio	100
4.6.1 Limits of Peak to Average Ratio Measurement	100
4.6.2 Test Setup	100
4.6.3 Test Procedures	100
4.6.4 Test Results	101
4.7 Conducted Spurious Emissions	107
4.7.1 Limits of Conducted Spurious Emissions Measurement	107
4.7.2 Test Setup	107
4.7.3 Test Procedure	107
4.7.4 Test Results	108
4.8 Radiated Emission Measurement	144
4.8.1 Limits of Radiated Emission Measurement	144
4.8.2 Test Procedure	144
4.8.3 Deviation from Test Standard	144
4.8.4 Test Setup	145

4.8.5 Test Results	146
5 Pictures of Test Arrangements.....	182
Appendix – Information on the Testing Laboratories	183

Release Control Record

Issue No.	Description	Date Issued
RF180920C21-10	Original Release	Dec. 27, 2018

1 Certificate of Conformity

Product: Smartphone

Test Model: G020E

Sample Status: Identical Prototype


Applicant: Google LLC

Test Date: Oct. 05, 2018 ~ Nov. 01, 2018

Standards: FCC Part 27, Subpart C, M

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



Date:

Dec. 27, 2018

Ivonne Wu / Supervisor

Approved by :



Date:

Dec. 27, 2018

Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(h)(2)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(m)(6)	Occupied Bandwidth	Pass	Meet the requirement of limit.
--	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Out-of-Band Emissions Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(m)(4)(6)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(m)(4)(6)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -19.75 dB at 5070.00 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 20, 2018	Aug. 19, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-616	Dec. 14, 2017	Dec. 13, 2018
HORN Antenna ETS-Lindgren	3117	00143293	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA9170	9170-480	Dec. 01, 2017	Nov. 30, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53052658	May 24, 2018	May 23, 2019
Preamplifier Agilent	310N	187226	Jun. 19, 2018	Jun. 18, 2019
Preamplifier Agilent	83017A	MY39501357	Jun. 19, 2018	Jun. 18, 2019
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017 Oct. 12, 2018	Oct. 19, 2018 Oct. 11, 2019
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC -SMS-100-SMS-12 0+RFC-SMS-100-S MS-400)	Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC -SMS-100-SMS-24)	Jun. 19, 2018	Jun. 18, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.
3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is 7450I-1.

3 General Information

3.1 General Description of EUT

Product	Smartphone	
Test Model	G020E	
Status of EUT	Identical Prototype	
Power Supply Rating	3.85 Vdc (Li-ion battery) 5.0 Vdc or 9 Vdc (adapter) 5.0 Vdc (host equipment)	
Modulation Type	QPSK, 16QAM, 64QAM	
Frequency Range	LTE Band 7 (Channel Bandwidth: 5 MHz)	2502.5 ~ 2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz)	2505 ~ 2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz)	2507.5 ~ 2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz)	2510 ~ 2560 MHz
	LTE Band 38 (Channel Bandwidth: 5 MHz)	2572.5 ~ 2617.5 MHz
	LTE Band 38 (Channel Bandwidth: 10 MHz)	2575.0 ~ 2615.0 MHz
	LTE Band 38 (Channel Bandwidth: 15 MHz)	2577.5 ~ 2612.5 MHz
	LTE Band 38 (Channel Bandwidth: 20 MHz)	2580.0 ~ 2610.0 MHz
	LTE Band 41 (Channel Bandwidth: 5 MHz)	2498.5 ~ 2687.5 MHz
	LTE Band 41 (Channel Bandwidth: 10 MHz)	2501.0 ~ 2685.0 MHz
	LTE Band 41 (Channel Bandwidth: 15 MHz)	2503.5 ~ 2682.5 MHz
	LTE Band 41 (Channel Bandwidth: 20 MHz)	2506.0 ~ 2680.0 MHz
Max. EIRP Power	LTE Band 7 (Channel Bandwidth: 5 MHz)	223.41 mW
	LTE Band 7 (Channel Bandwidth: 10 MHz)	225.58 mW
	LTE Band 7 (Channel Bandwidth: 15 MHz)	227.40 mW
	LTE Band 7 (Channel Bandwidth: 20 MHz)	229.46 mW
	LTE Band 38 (Channel Bandwidth: 5 MHz)	119.04 mW
	LTE Band 38 (Channel Bandwidth: 10 MHz)	118.77 mW
	LTE Band 38 (Channel Bandwidth: 15 MHz)	120.14 mW
	LTE Band 38 (Channel Bandwidth: 20 MHz)	121.53 mW
	LTE Band 41 (Channel Bandwidth: 5 MHz)	296.28 mW
	LTE Band 41 (Channel Bandwidth: 10 MHz)	298.61 mW
	LTE Band 41 (Channel Bandwidth: 15 MHz)	299.71 mW
	LTE Band 41 (Channel Bandwidth: 20 MHz)	303.18 mW


Emission Designator	LTE Band 7 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 7 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 7 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 7 (Channel Bandwidth: 20 MHz)	18M0W7D
	LTE Band 38 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 38 (Channel Bandwidth: 10 MHz)	8M97W7D
	LTE Band 38 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 38 (Channel Bandwidth: 20 MHz)	17M9W7D
	LTE Band 41 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 41 (Channel Bandwidth: 10 MHz)	8M97W7D
	LTE Band 41 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 41 (Channel Bandwidth: 20 MHz)	17M9W7D
Antenna Type	PIFA Antenna	
Antenna Gain	LTE 7	0.2 dBi (Main) / -1.2 dBi (Aux.)
	LTE 38	0.1 dBi (Main) / -1.3 dBi (Aux.)
	LTE 41	0.1 dBi gain / -1.8 dBi (Aux.)
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:


- There're 2 configurations for the EUT listed as below.
 Main Sample: EUT + Battery 1
 2nd Sample: EUT + Battery 2
 ✧ After pre-tested with the EUT, only the worst configuration (main sample) was chosen for the final test.
- The EUT's accessories list refers to Ext. Pho.
- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

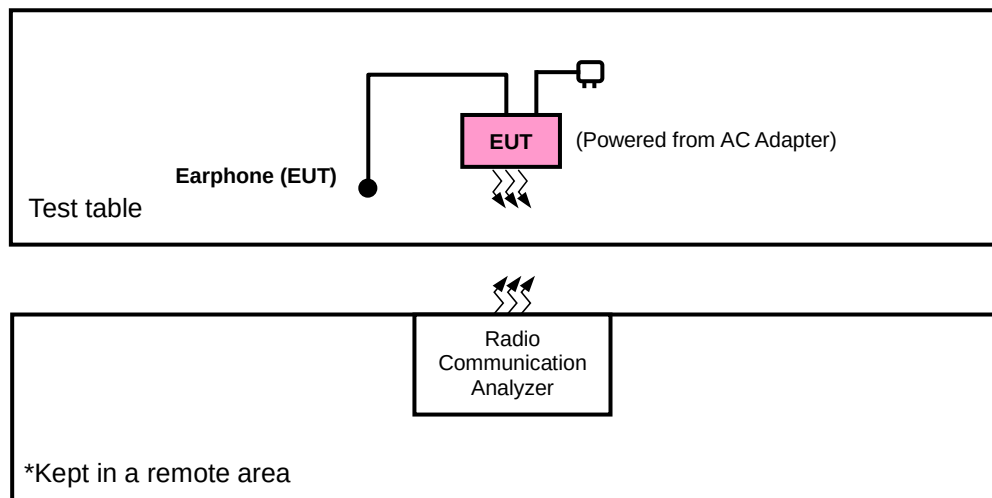

<E.I.R.P. Test>

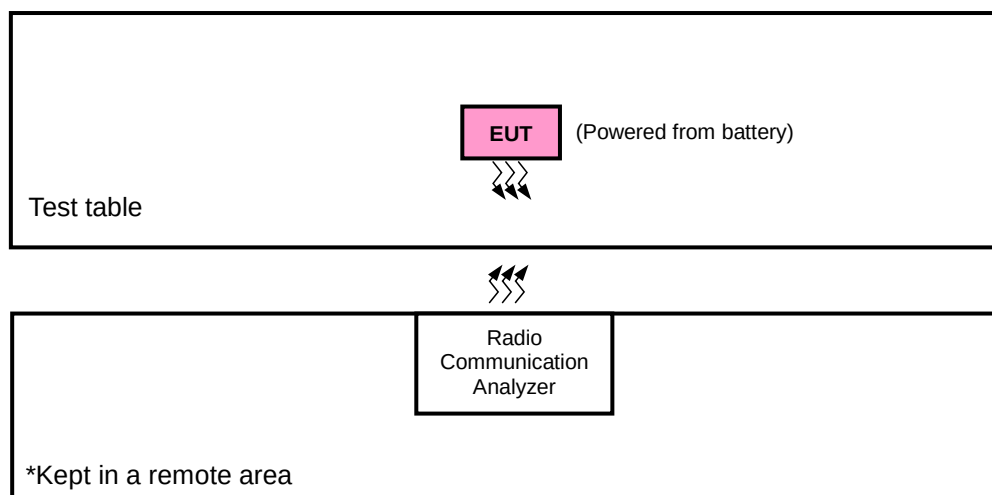

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
LTE Band 7	Z-plane	X-axis
LTE Band 38	X-plane	X-axis
LTE Band 41	X-plane	X-axis

LTE Band 7

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20850 to 21350	20850	20 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
-	Frequency Stability	20775 to 21425	20775, 21425	5 MHz	QPSK	1 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK	1 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	20775 to 21425	20775, 21425	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		20800 to 21400	20800, 21400	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		20825 to 21375	20825, 21375	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		20850 to 21350	20850, 21350	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Conducted Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20800 to 21400	20800, 21100, 21400	10 MHz	QPSK	1 RB / 0 RB Offset
		20825 to 21375	20825, 21100, 21375	15 MHz	QPSK	1 RB / 0 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	20775 to 21425	20775, 21100, 21425	5 MHz	QPSK	1 RB / 12 RB Offset
		20850 to 21350	20850, 21100 21350	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 38

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	37850 to 38150	37850	20 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
-	Frequency Stability	37775 to 38225	37775, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	37775 to 38225	37775, 38225	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		37800 to 38200	37800, 38200	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		37825 to 38175	37825, 38175	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		37850 to 38150	37850, 38150	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Conducted Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37800 to 38200	37800, 38000, 38200	10 MHz	QPSK	1 RB / 0 RB Offset
		37825 to 38175	37825, 38000, 38175	15 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	37775 to 38225	37775, 38000, 38225	5 MHz	QPSK	1 RB / 0 RB Offset
		37850 to 38150	37850, 38000, 38150	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 41

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 49 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 74 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 99 RB Offset
-	Modulation Characteristics	39675 to 41565	40620	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
-	Frequency Stability	39675 to 41565	39675, 41565	5 MHz	QPSK	1 RB / 0 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK	1 RB / 0 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK	1 RB / 0 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Out-of-Band Emissions	39675 to 41565	39675, 41565	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		39700 to 41540	39700, 41540	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		39725 to 41515	39725, 41515	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		39750 to 41490	39750, 41490	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Conducted Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39700 to 41540	39700, 40620, 41540	10 MHz	QPSK	1 RB / 49 RB Offset
		39725 to 41515	39725, 40620, 41515	15 MHz	QPSK	1 RB / 74 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 99 RB Offset
-	Radiated Emission	39675 to 41565	39675, 40620, 41565	5 MHz	QPSK	1 RB / 12 RB Offset
		39750 to 41490	39750, 40620, 41490	20 MHz	QPSK	1 RB / 99 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	25 deg. C, 65 % RH	3.85 Vdc	Karl Lee
Modulation Characteristics	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Out-of-Band Emissions	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2 watts transmitter output power” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 Test Procedures

EIRP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

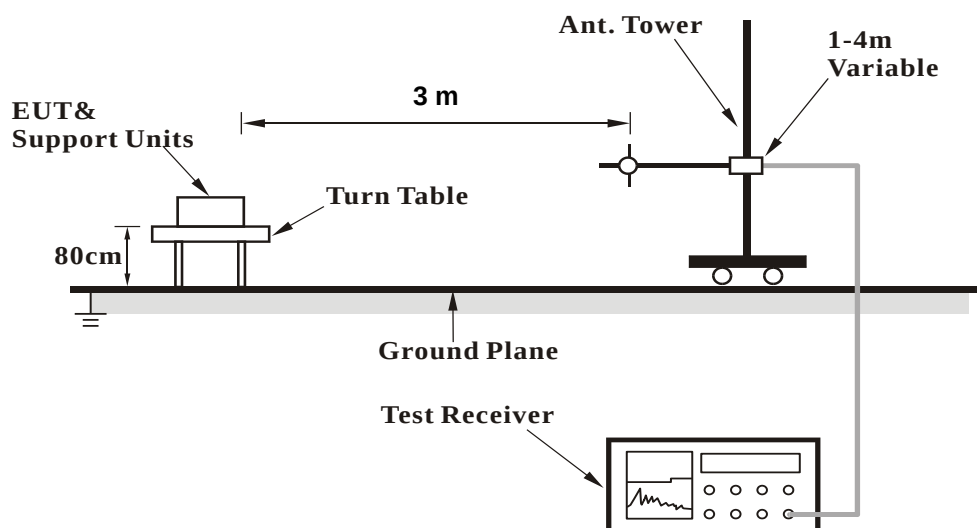

<Radiated Emission above 1 GHz>

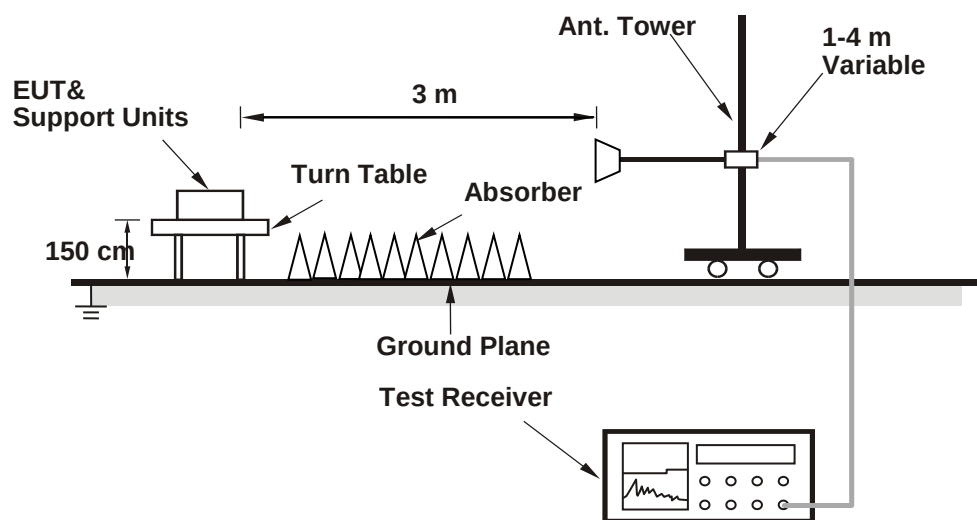

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

The worst configuration mode is presented in the report as below. Please refer to SAR test report for more detail test mode.

Band		TX Antenna	WLAN Function	Body-Worn/Hotspot
LTE	B7	Ant 2	WLAN-Off	Body-Worn/Hotspot
	B38	Ant 2	WLAN-Off	Body-Worn/Hotspot
	B41	Ant 2	WLAN-Off	Body-Worn/Hotspot

Conducted Output Power (dBm)

LTE Band 7															
Body-Worn / Hotspot															
Ant-2															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350				Channel		20825	21100	21375	
		Frequency (MHz)		2510.0	2535.0	2560.0				Frequency (MHz)		2507.5	2535.0	2562.5	
20M	QPSK	1	0	23.25	23.47	23.49	0	15M	QPSK	1	0	23.15	23.40	23.48	0
		1	50	23.24	23.46	23.48	0			1	37	23.15	23.40	23.47	0
		1	99	23.21	23.43	23.45	0			1	74	23.20	23.39	23.35	0
		50	0	22.27	22.49	22.51	1			36	0	22.22	22.39	22.45	1
		50	25	22.22	22.44	22.46	1			36	19	22.18	22.38	22.41	1
		50	50	22.22	22.44	22.46	1			36	39	22.18	22.38	22.45	1
		100	0	22.25	22.47	22.49	1			75	0	22.19	22.40	22.40	1
		1	0	22.25	22.40	22.41	1		16QAM	1	0	22.06	22.32	22.43	1
	16QAM	1	50	22.14	22.45	22.42	1			1	37	22.12	22.40	22.37	1
		1	99	22.20	22.40	22.37	1			1	74	22.14	22.33	22.27	1
		50	0	21.22	21.39	21.48	2			36	0	21.19	21.31	21.41	2
		50	25	21.21	21.38	21.38	2			36	19	21.13	21.28	21.34	2
		50	50	21.21	21.39	21.39	2			36	39	21.06	21.41	21.38	2
		100	0	21.22	21.44	21.49	2			75	0	21.13	21.36	21.43	2
		1	0	21.23	21.45	21.48	2		64QAM	1	0	21.18	21.36	21.47	2
	64QAM	1	50	21.17	21.43	21.39	2			1	37	21.18	21.42	21.44	2
		1	99	21.12	21.39	21.40	2			1	74	21.16	21.24	21.37	2
		50	0	20.24	20.49	20.50	3			36	0	20.15	20.46	20.41	3
		50	25	20.12	20.44	20.37	3			36	19	20.15	20.40	20.35	3
		50	50	20.22	20.37	20.44	3			36	39	20.20	20.28	20.41	3
		100	0	20.23	20.45	20.49	3			75	0	20.19	20.44	20.31	3
10M	QPSK	1	0	23.17	23.32	23.42	0	5M	QPSK	1	0	23.12	23.38	23.29	0
		1	24	23.14	23.36	23.40	0			1	12	23.05	23.40	23.28	0
		1	49	23.13	23.31	23.34	0			1	24	23.11	23.32	23.25	0
		25	0	22.15	22.29	22.38	1			12	0	22.13	22.27	22.24	1
		25	12	22.13	22.37	22.32	1			12	6	22.15	22.22	22.22	1
		25	25	22.14	22.31	22.33	1			12	13	22.13	22.29	22.36	1
		50	0	22.20	22.33	22.32	1			25	0	22.06	22.23	22.19	1
		1	0	22.07	22.32	22.27	1		16QAM	1	0	22.05	22.25	22.37	1
	16QAM	1	24	22.09	22.19	22.37	1			1	12	22.13	22.35	22.31	1
		1	49	22.14	22.13	22.29	1			1	24	21.93	22.18	22.25	1
		25	0	21.14	21.22	21.26	2			12	0	21.23	21.47	21.38	2
		25	12	21.04	21.24	21.35	2			12	6	21.07	21.32	21.21	2
		25	25	21.14	21.18	21.22	2			12	13	21.07	21.23	21.14	2
		50	0	21.09	21.22	21.21	2			25	0	21.02	21.24	21.44	2
		1	0	21.01	21.17	21.37	2		64QAM	1	0	21.14	21.39	21.32	2
	64QAM	1	24	21.08	21.23	21.23	2			1	12	21.05	21.30	21.42	2
		1	49	21.08	21.21	21.22	2			1	24	20.95	21.27	21.20	2
		25	0	20.10	20.25	20.26	3			12	0	20.13	20.29	20.29	3
		25	12	20.02	20.19	20.32	3			12	6	20.10	20.31	20.23	3
		25	25	20.11	20.22	20.28	3			12	13	20.11	20.28	20.31	3
		50	0	20.07	20.17	20.36	3			25	0	20.10	20.23	20.45	3

LTE Band 38															
Body-Worn / Hotspot															
Ant-2															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150				Channel		37825	38000	38175	
		Frequency (MHz)		2580.0	2595.0	2610.0				Frequency (MHz)		2577.5	2595.0	2612.5	
20M	QPSK	1	0	25.43	25.33	25.35	0	15M	QPSK	1	0	25.37	25.31	25.31	0
		1	50	25.38	25.28	25.30	0			1	37	25.30	25.18	25.20	0
		1	99	25.39	25.29	25.31	0			1	74	25.30	25.25	25.27	0
		50	0	24.46	24.36	24.38	1			36	0	24.42	24.27	24.30	1
		50	25	24.47	24.37	24.39	1			36	19	24.37	24.35	24.38	1
		50	50	24.44	24.34	24.36	1			36	39	24.37	24.31	24.30	1
		100	0	24.45	24.35	24.37	1			75	0	24.36	24.26	24.32	1
	16QAM	1	0	24.34	24.32	24.35	1		16QAM	1	0	24.29	24.19	24.24	1
		1	50	24.31	24.18	24.20	1			1	37	24.27	24.18	24.21	1
		1	99	24.33	24.21	24.31	1			1	74	24.25	24.16	24.18	1
		50	0	23.40	23.32	23.37	2			36	0	23.40	23.18	23.30	2
		50	25	23.43	23.31	23.36	2			36	19	23.38	23.35	23.37	2
		50	50	23.42	23.30	23.28	2			36	39	23.27	23.20	23.28	2
		100	0	23.43	23.31	23.31	2			75	0	23.40	23.20	23.32	2
	64QAM	1	0	23.37	23.27	23.29	2		64QAM	1	0	23.25	23.25	23.19	2
		1	50	23.38	23.28	23.23	2			1	37	23.28	23.10	23.23	2
		1	99	23.36	23.24	23.30	2			1	74	23.30	23.25	23.21	2
		50	0	22.37	22.35	22.35	3			36	0	22.35	22.30	22.24	3
		50	25	22.42	22.31	22.36	3			36	19	22.46	22.21	22.33	3
		50	50	22.36	22.28	22.26	3			36	39	22.27	22.26	22.21	3
		100	0	22.45	22.26	22.36	3			75	0	22.39	22.24	22.31	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37800	38000	38200				Channel		37775	38000	38225	
		Frequency (MHz)		2575.0	2595.0	2615.0				Frequency (MHz)		2572.5	2595.0	2617.5	
10M	QPSK	1	0	25.36	25.27	25.24	0	5M	QPSK	1	0	25.31	25.24	25.21	0
		1	24	25.19	25.09	25.16	0			1	12	25.17	25.07	25.15	0
		1	49	25.18	25.21	25.21	0			1	24	25.29	25.16	25.13	0
		25	0	24.27	24.12	24.33	1			12	0	24.39	24.26	24.18	1
		25	12	24.38	24.32	24.22	1			12	6	24.35	24.30	24.21	1
		25	25	24.23	24.13	24.21	1			12	13	24.39	24.23	24.32	1
		50	0	24.28	24.24	24.28	1			25	0	24.35	24.25	24.00	1
	16QAM	1	0	24.36	24.26	24.19	1		16QAM	1	0	24.28	24.12	24.25	1
		1	24	24.25	24.02	24.16	1			1	12	24.20	24.06	24.19	1
		1	49	24.30	24.10	24.19	1			1	24	24.21	24.12	24.16	1
		25	0	23.28	23.28	23.31	2			12	0	23.31	23.19	23.14	2
		25	12	23.27	23.14	23.09	2			12	6	23.33	23.21	23.17	2
		25	25	23.32	23.12	23.20	2			12	13	23.28	23.07	23.15	2
		50	0	23.39	23.17	23.33	2			25	0	23.27	23.17	23.14	2
	64QAM	1	0	23.24	23.14	23.20	2		64QAM	1	0	23.32	23.04	23.22	2
		1	24	23.22	23.18	23.16	2			1	12	23.12	23.00	23.16	2
		1	49	23.15	23.20	23.14	2			1	24	23.14	23.12	23.08	2
		25	0	22.30	22.18	22.20	3			12	0	22.21	22.27	22.16	3
		25	12	22.29	22.19	22.15	3			12	6	22.35	22.18	22.32	3
		25	25	22.20	22.25	22.17	3			12	13	22.26	22.24	22.23	3
		50	0	22.29	22.27	22.26	3			25	0	22.19	22.17	22.24	3

LTE Band 41
Body-Worn / Hotspot
Ant-2

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		39750	40620	41490				Channel		39725	40620	41515	
		Frequency (MHz)		2506.0	2593.0	2680.0				Frequency (MHz)		2503.5	2593.0	2682.5	
20M	QPSK	1	0	23.24	23.65	23.68	0	15M	QPSK	1	0	23.20	23.58	23.67	0
		1	50	23.25	23.66	23.69	0			1	37	23.24	23.64	23.66	0
		1	99	23.26	23.67	23.70	0			1	74	23.22	23.61	23.69	0
		50	0	22.32	22.73	22.76	1			36	0	22.24	22.65	22.73	1
		50	25	22.34	22.75	22.78	1			36	19	22.30	22.72	22.76	1
		50	50	22.30	22.71	22.74	1			36	39	22.26	22.71	22.73	1
		100	0	22.30	22.71	22.74	1			75	0	22.23	22.67	22.74	1
	16QAM	1	0	22.20	22.59	22.60	1		16QAM	1	0	22.17	22.59	22.64	1
		1	50	22.16	22.60	22.66	1			1	37	22.23	22.58	22.61	1
		1	99	22.22	22.66	22.66	1			1	74	22.26	22.66	22.64	1
		50	0	21.28	21.70	21.71	2			36	0	21.28	21.66	21.76	2
		50	25	21.34	21.70	21.74	2			36	19	21.25	21.69	21.78	2
		50	50	21.27	21.64	21.64	2			36	39	21.24	21.63	21.70	2
		100	0	21.20	21.62	21.64	2			75	0	21.29	21.62	21.71	2
	64QAM	1	0	21.14	21.64	21.58	2		64QAM	1	0	21.17	21.56	21.65	2
		1	50	21.15	21.62	21.61	2			1	37	21.23	21.60	21.62	2
		1	99	21.26	21.62	21.60	2			1	74	21.18	21.61	21.65	2
		50	0	20.23	20.65	20.75	3			36	0	20.23	20.69	20.68	3
		50	25	20.30	20.74	20.69	3			36	19	20.26	20.68	20.77	3
		50	50	20.24	20.70	20.72	3			36	39	20.25	20.63	20.70	3
		100	0	20.25	20.71	20.73	3			75	0	20.30	20.65	20.71	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		39700	40620	41540				Channel		39675	40620	41565	
		Frequency (MHz)		2501.0	2593.0	2685.0				Frequency (MHz)		2498.5	2593.0	2687.5	
10M	QPSK	1	0	23.04	23.52	23.48	0	5M	QPSK	1	0	23.16	23.58	23.54	0
		1	24	23.11	23.55	23.52	0			1	12	23.11	23.63	23.58	0
		1	49	23.17	23.52	23.55	0			1	24	23.22	23.62	23.57	0
		25	0	22.20	22.67	22.59	1			12	0	22.22	22.66	22.70	1
		25	12	22.25	22.65	22.73	1			12	6	22.17	22.65	22.70	1
		25	25	22.19	22.62	22.72	1			12	13	22.13	22.69	22.64	1
		50	0	22.20	22.58	22.60	1			25	0	22.26	22.61	22.67	1
	16QAM	1	0	22.05	22.55	22.53	1		16QAM	1	0	22.23	22.60	22.56	1
		1	24	22.12	22.56	22.58	1			1	12	22.13	22.60	22.66	1
		1	49	22.15	22.53	22.61	1			1	24	22.22	22.57	22.60	1
		25	0	21.18	21.67	21.62	2			12	0	21.23	21.73	21.65	2
		25	12	21.28	21.61	21.63	2			12	6	21.19	21.62	21.69	2
		25	25	21.20	21.61	21.66	2			12	13	21.14	21.61	21.62	2
		50	0	21.16	21.61	21.58	2			25	0	21.25	21.63	21.64	2
	64QAM	1	0	21.06	21.51	21.54	2		64QAM	1	0	21.24	21.57	21.53	2
		1	24	21.20	21.57	21.55	2			1	12	21.13	21.55	21.65	2
		1	49	21.09	21.48	21.59	2			1	24	21.20	21.65	21.65	2
		25	0	20.22	20.65	20.63	3			12	0	20.25	20.69	20.65	3
		25	12	20.31	20.59	20.73	3			12	6	20.16	20.64	20.68	3
		25	25	20.19	20.59	20.64	3			12	13	20.19	20.61	20.61	3
		50	0	20.25	20.56	20.63	3			25	0	20.29	20.58	20.64	3

EIRP Power (dBm)

LTE Band 7							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	20775	2502.5	-20.83	44.24	23.41	219.18	H
	21100	2535.0	-20.74	44.20	23.46	221.67	
	21425	2567.5	-21.31	44.80	23.49	223.41	
	20775	2502.5	-24.76	44.19	19.43	87.72	V
	21100	2535.0	-24.62	44.09	19.47	88.47	
	21425	2567.5	-24.98	44.50	19.52	89.52	
Channel Bandwidth: 5 MHz / 16QAM							
Z	20775	2502.5	-21.83	44.24	22.41	174.10	H
	21100	2535.0	-21.75	44.20	22.45	175.67	
	21425	2567.5	-22.31	44.80	22.49	177.46	
	20775	2502.5	-25.76	44.19	18.43	69.68	V
	21100	2535.0	-25.63	44.09	18.46	70.11	
	21425	2567.5	-25.98	44.50	18.52	71.10	
Channel Bandwidth: 5 MHz / 64QAM							
Z	20775	2502.5	-22.84	44.24	21.40	137.97	H
	21100	2535.0	-22.75	44.20	21.45	139.54	
	21425	2567.5	-23.32	44.80	21.48	140.64	
	20775	2502.5	-26.76	44.19	17.43	55.35	V
	21100	2535.0	-26.64	44.09	17.45	55.56	
	21425	2567.5	-26.98	44.50	17.52	56.48	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 7							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	20800	2505.0	-20.89	44.34	23.45	221.36	H
	21100	2535.0	-20.70	44.20	23.50	223.72	
	21400	2565.0	-21.19	44.72	23.53	225.58	
	20800	2505.0	-24.76	44.23	19.47	88.43	V
	21100	2535.0	-24.58	44.09	19.51	89.29	
	21400	2565.0	-24.86	44.41	19.55	90.07	
Channel Bandwidth: 10 MHz / 16QAM							
Z	20800	2505.0	-21.89	44.34	22.45	175.83	H
	21100	2535.0	-21.71	44.20	22.49	177.30	
	21400	2565.0	-22.20	44.72	22.52	178.77	
	20800	2505.0	-25.76	44.23	18.47	70.24	V
	21100	2535.0	-25.58	44.09	18.51	70.93	
	21400	2565.0	-25.87	44.41	18.54	71.38	
Channel Bandwidth: 10 MHz / 64QAM							
Z	20800	2505.0	-22.90	44.34	21.44	139.35	H
	21100	2535.0	-22.71	44.20	21.49	140.83	
	21400	2565.0	-23.21	44.72	21.51	141.68	
	20800	2505.0	-26.76	44.23	17.47	55.80	V
	21100	2535.0	-26.58	44.09	17.51	56.34	
	21400	2565.0	-26.88	44.41	17.53	56.57	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 7							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	20825	2507.5	-20.83	44.32	23.49	223.25	H
	21100	2535.0	-20.66	44.20	23.54	225.79	
	21375	2562.5	-21.28	44.85	23.57	227.40	
	20825	2507.5	-24.48	43.99	19.51	89.37	V
	21100	2535.0	-24.54	44.09	19.55	90.12	
	21375	2562.5	-24.92	44.51	19.59	90.99	
Channel Bandwidth: 15 MHz / 16QAM							
Z	20825	2507.5	-21.83	44.32	22.49	177.34	H
	21100	2535.0	-21.67	44.20	22.53	178.94	
	21375	2562.5	-22.29	44.85	22.56	180.22	
	20825	2507.5	-25.49	43.99	18.50	70.83	V
	21100	2535.0	-25.55	44.09	18.54	71.42	
	21375	2562.5	-25.92	44.51	18.59	72.28	
Channel Bandwidth: 15 MHz / 64QAM							
Z	20825	2507.5	-22.84	44.32	21.48	140.54	H
	21100	2535.0	-22.68	44.20	21.52	141.81	
	21375	2562.5	-23.30	44.85	21.55	142.82	
	20825	2507.5	-26.50	43.99	17.49	56.13	V
	21100	2535.0	-26.55	44.09	17.54	56.73	
	21375	2562.5	-26.92	44.51	17.59	57.41	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 7							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	20850	2510.0	-20.63	44.16	23.53	225.42	H
	21100	2535.0	-20.62	44.20	23.58	227.88	
	21350	2560.0	-21.20	44.81	23.61	229.46	
	20850	2510.0	-25.23	44.78	19.55	90.16	V
	21100	2535.0	-24.50	44.09	19.59	90.95	
	21350	2560.0	-25.09	44.72	19.63	91.83	
Channel Bandwidth: 20 MHz / 16QAM							
Z	20850	2510.0	-21.64	44.16	22.52	178.65	H
	21100	2535.0	-21.62	44.20	22.58	181.01	
	21350	2560.0	-22.21	44.81	22.60	181.84	
	20850	2510.0	-26.24	44.78	18.54	71.45	V
	21100	2535.0	-25.51	44.09	18.58	72.08	
	21350	2560.0	-26.10	44.72	18.62	72.78	
Channel Bandwidth: 20 MHz / 64QAM							
Z	20850	2510.0	-22.65	44.16	21.51	141.58	H
	21100	2535.0	-22.62	44.20	21.58	143.78	
	21350	2560.0	-23.22	44.81	21.59	144.11	
	20850	2510.0	-27.25	44.78	17.53	56.62	V
	21100	2535.0	-26.51	44.09	17.58	57.25	
	21350	2560.0	-27.11	44.72	17.61	57.68	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	37775	2572.5	-23.53	44.24	20.71	117.71	H
	38000	2595.0	-23.44	44.20	20.76	119.04	
	38225	2617.5	-24.08	44.80	20.72	118.06	
	37775	2572.5	-26.48	44.19	17.71	59.03	V
	38000	2595.0	-26.34	44.09	17.75	59.54	
	38225	2617.5	-26.77	44.50	17.73	59.28	
Channel Bandwidth: 5 MHz / 16QAM							
X	37775	2572.5	-24.48	44.24	19.76	94.58	H
	38000	2595.0	-24.42	44.20	19.78	94.99	
	38225	2617.5	-25.05	44.80	19.75	94.43	
	37775	2572.5	-27.45	44.19	16.74	47.22	V
	38000	2595.0	-27.31	44.09	16.78	47.62	
	38225	2617.5	-27.75	44.50	16.75	47.30	
Channel Bandwidth: 5 MHz / 64QAM							
X	37775	2572.5	-25.51	44.24	18.73	74.61	H
	38000	2595.0	-25.45	44.20	18.75	74.94	
	38225	2617.5	-26.09	44.80	18.71	74.32	
	37775	2572.5	-28.48	44.19	15.71	37.25	V
	38000	2595.0	-28.34	44.09	15.75	37.57	
	38225	2617.5	-28.80	44.50	15.70	37.14	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	37800	2575.0	-23.60	44.34	20.74	118.60	H
	38000	2595.0	-23.45	44.20	20.75	118.77	
	38200	2615.0	-24.02	44.72	20.70	117.57	
	37800	2575.0	-26.50	44.23	17.73	59.24	V
	38000	2595.0	-26.33	44.09	17.76	59.68	
	38200	2615.0	-26.71	44.41	17.70	58.83	
Channel Bandwidth: 10 MHz / 16QAM							
X	37800	2575.0	-24.63	44.34	19.71	93.56	H
	38000	2595.0	-24.44	44.20	19.76	94.56	
	38200	2615.0	-24.99	44.72	19.73	94.04	
	37800	2575.0	-27.49	44.23	16.74	47.16	V
	38000	2595.0	-27.31	44.09	16.78	47.62	
	38200	2615.0	-27.68	44.41	16.73	47.05	
Channel Bandwidth: 10 MHz / 64QAM							
X	37800	2575.0	-25.59	44.34	18.75	75.01	H
	38000	2595.0	-25.43	44.20	18.77	75.28	
	38200	2615.0	-25.98	44.72	18.74	74.87	
	37800	2575.0	-28.52	44.23	15.71	37.20	V
	38000	2595.0	-28.33	44.09	15.76	37.65	
	38200	2615.0	-28.68	44.41	15.73	37.38	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	37825	2577.5	-23.55	44.32	20.77	119.34	H
	38000	2595.0	-23.40	44.20	20.80	120.14	
	38175	2612.5	-24.07	44.85	20.78	119.62	
	37825	2577.5	-26.27	43.99	17.72	59.18	V
	38000	2595.0	-26.33	44.09	17.76	59.68	
	38175	2612.5	-26.80	44.51	17.71	59.02	
Channel Bandwidth: 15 MHz / 16QAM							
X	37825	2577.5	-24.55	44.32	19.77	94.80	H
	38000	2595.0	-24.38	44.20	19.82	95.87	
	38175	2612.5	-25.04	44.85	19.81	95.68	
	37825	2577.5	-27.22	43.99	16.77	47.56	V
	38000	2595.0	-27.29	44.09	16.80	47.84	
	38175	2612.5	-27.75	44.51	16.76	47.42	
Channel Bandwidth: 15 MHz / 64QAM							
X	37825	2577.5	-25.54	44.32	18.78	75.47	H
	38000	2595.0	-25.40	44.20	18.80	75.81	
	38175	2612.5	-26.09	44.85	18.76	75.13	
	37825	2577.5	-28.28	43.99	15.71	37.26	V
	38000	2595.0	-28.34	44.09	15.75	37.57	
	38175	2612.5	-28.78	44.51	15.73	37.41	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 38							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	37850	2580.0	-23.33	44.16	20.83	121.06	H
	38000	2595.0	-23.35	44.20	20.85	121.53	
	38150	2610.0	-24.00	44.81	20.81	120.42	
	37850	2580.0	-27.02	44.78	17.76	59.70	V
	38000	2595.0	-26.30	44.09	17.79	60.09	
	38150	2610.0	-26.92	44.72	17.80	60.26	
Channel Bandwidth: 20 MHz / 16QAM							
X	37850	2580.0	-24.34	44.16	19.82	95.94	H
	38000	2595.0	-24.33	44.20	19.87	96.98	
	38150	2610.0	-24.95	44.81	19.86	96.76	
	37850	2580.0	-27.95	44.78	16.83	48.19	V
	38000	2595.0	-27.28	44.09	16.81	47.95	
	38150	2610.0	-27.92	44.72	16.80	47.86	
Channel Bandwidth: 20 MHz / 64QAM							
X	37850	2580.0	-25.40	44.16	18.76	75.16	H
	38000	2595.0	-25.42	44.20	18.78	75.46	
	38150	2610.0	-26.00	44.81	18.81	75.98	
	37850	2580.0	-29.00	44.78	15.78	37.84	V
	38000	2595.0	-28.30	44.09	15.79	37.91	
	38150	2610.0	-28.97	44.72	15.75	37.58	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39675	2498.5	-19.55	44.24	24.69	294.31	H
	40620	2593.0	-19.48	44.20	24.72	296.28	
	41565	2687.5	-20.09	44.80	24.71	295.87	
	39675	2498.5	-23.69	44.19	20.50	112.23	V
	40620	2593.0	-23.61	44.09	20.48	111.63	
	41565	2687.5	-24.04	44.50	20.46	111.15	
Channel Bandwidth: 5 MHz / 16QAM							
X	39675	2498.5	-20.51	44.24	23.73	235.94	H
	40620	2593.0	-20.50	44.20	23.70	234.26	
	41565	2687.5	-21.08	44.80	23.72	235.56	
	39675	2498.5	-24.77	44.19	19.42	87.52	V
	40620	2593.0	-24.66	44.09	19.43	87.66	
	41565	2687.5	-25.10	44.50	19.40	87.08	
Channel Bandwidth: 5 MHz / 64QAM							
X	39675	2498.5	-21.53	44.24	22.71	186.55	H
	40620	2593.0	-21.48	44.20	22.72	186.94	
	41565	2687.5	-22.07	44.80	22.73	187.54	
	39675	2498.5	-25.70	44.19	18.49	70.65	V
	40620	2593.0	-25.61	44.09	18.48	70.44	
	41565	2687.5	-26.06	44.50	18.44	69.81	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39700	2501.0	-19.59	44.34	24.75	298.61	H
	40620	2593.0	-19.47	44.20	24.73	296.96	
	41540	2685.0	-20.00	44.72	24.72	296.69	
	39700	2501.0	-23.73	44.23	20.50	112.10	V
	40620	2593.0	-23.61	44.09	20.48	111.63	
	41540	2685.0	-23.96	44.41	20.45	110.82	
Channel Bandwidth: 10 MHz / 16QAM							
X	39700	2501.0	-20.57	44.34	23.77	238.29	H
	40620	2593.0	-20.42	44.20	23.78	238.62	
	41540	2685.0	-20.99	44.72	23.73	236.21	
	39700	2501.0	-24.75	44.23	19.48	88.63	V
	40620	2593.0	-24.62	44.09	19.47	88.47	
	41540	2685.0	-24.97	44.41	19.44	87.82	
Channel Bandwidth: 10 MHz / 64QAM							
X	39700	2501.0	-21.56	44.34	22.78	189.71	H
	40620	2593.0	-21.44	44.20	22.76	188.67	
	41540	2685.0	-21.99	44.72	22.73	187.63	
	39700	2501.0	-25.76	44.23	18.47	70.24	V
	40620	2593.0	-25.61	44.09	18.48	70.44	
	41540	2685.0	-25.98	44.41	18.43	69.60	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39725	2503.5	-19.58	44.32	24.74	297.71	H
	40620	2593.0	-19.43	44.20	24.77	299.71	
	41515	2682.5	-20.09	44.85	24.76	299.09	
	39725	2503.5	-23.47	43.99	20.52	112.77	V
	40620	2593.0	-23.58	44.09	20.51	112.41	
	41515	2682.5	-24.03	44.51	20.48	111.69	
Channel Bandwidth: 15 MHz / 16QAM							
X	39725	2503.5	-20.55	44.32	23.77	238.12	H
	40620	2593.0	-20.39	44.20	23.81	240.27	
	41515	2682.5	-21.05	44.85	23.80	239.77	
	39725	2503.5	-24.51	43.99	19.48	88.76	V
	40620	2593.0	-24.59	44.09	19.50	89.08	
	41515	2682.5	-25.02	44.51	19.49	88.92	
Channel Bandwidth: 15 MHz / 64QAM							
X	39725	2503.5	-21.52	44.32	22.80	190.46	H
	40620	2593.0	-21.43	44.20	22.77	189.10	
	41515	2682.5	-22.07	44.85	22.78	189.58	
	39725	2503.5	-25.52	43.99	18.47	70.34	V
	40620	2593.0	-25.59	44.09	18.50	70.76	
	41515	2682.5	-26.00	44.51	18.51	70.96	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 41							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	39750	2506.0	-19.37	44.16	24.79	301.30	H
	40620	2593.0	-19.38	44.20	24.82	303.18	
	41490	2680.0	-20.00	44.81	24.81	302.48	
	39750	2506.0	-24.22	44.78	20.56	113.76	V
	40620	2593.0	-23.55	44.09	20.54	113.19	
	41490	2680.0	-24.19	44.72	20.53	112.98	
Channel Bandwidth: 20 MHz / 16QAM							
X	39750	2506.0	-20.34	44.16	23.82	240.99	H
	40620	2593.0	-20.35	44.20	23.85	242.49	
	41490	2680.0	-21.01	44.81	23.80	239.72	
	39750	2506.0	-25.30	44.78	19.48	88.72	V
	40620	2593.0	-24.58	44.09	19.51	89.29	
	41490	2680.0	-25.20	44.72	19.52	89.54	
Channel Bandwidth: 20 MHz / 64QAM							
X	39750	2506.0	-21.38	44.16	22.78	189.67	H
	40620	2593.0	-21.40	44.20	22.80	190.41	
	41490	2680.0	-22.00	44.81	22.81	190.85	
	39750	2506.0	-26.28	44.78	18.50	70.79	V
	40620	2593.0	-25.55	44.09	18.54	71.42	
	41490	2680.0	-26.20	44.72	18.52	71.12	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A


4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

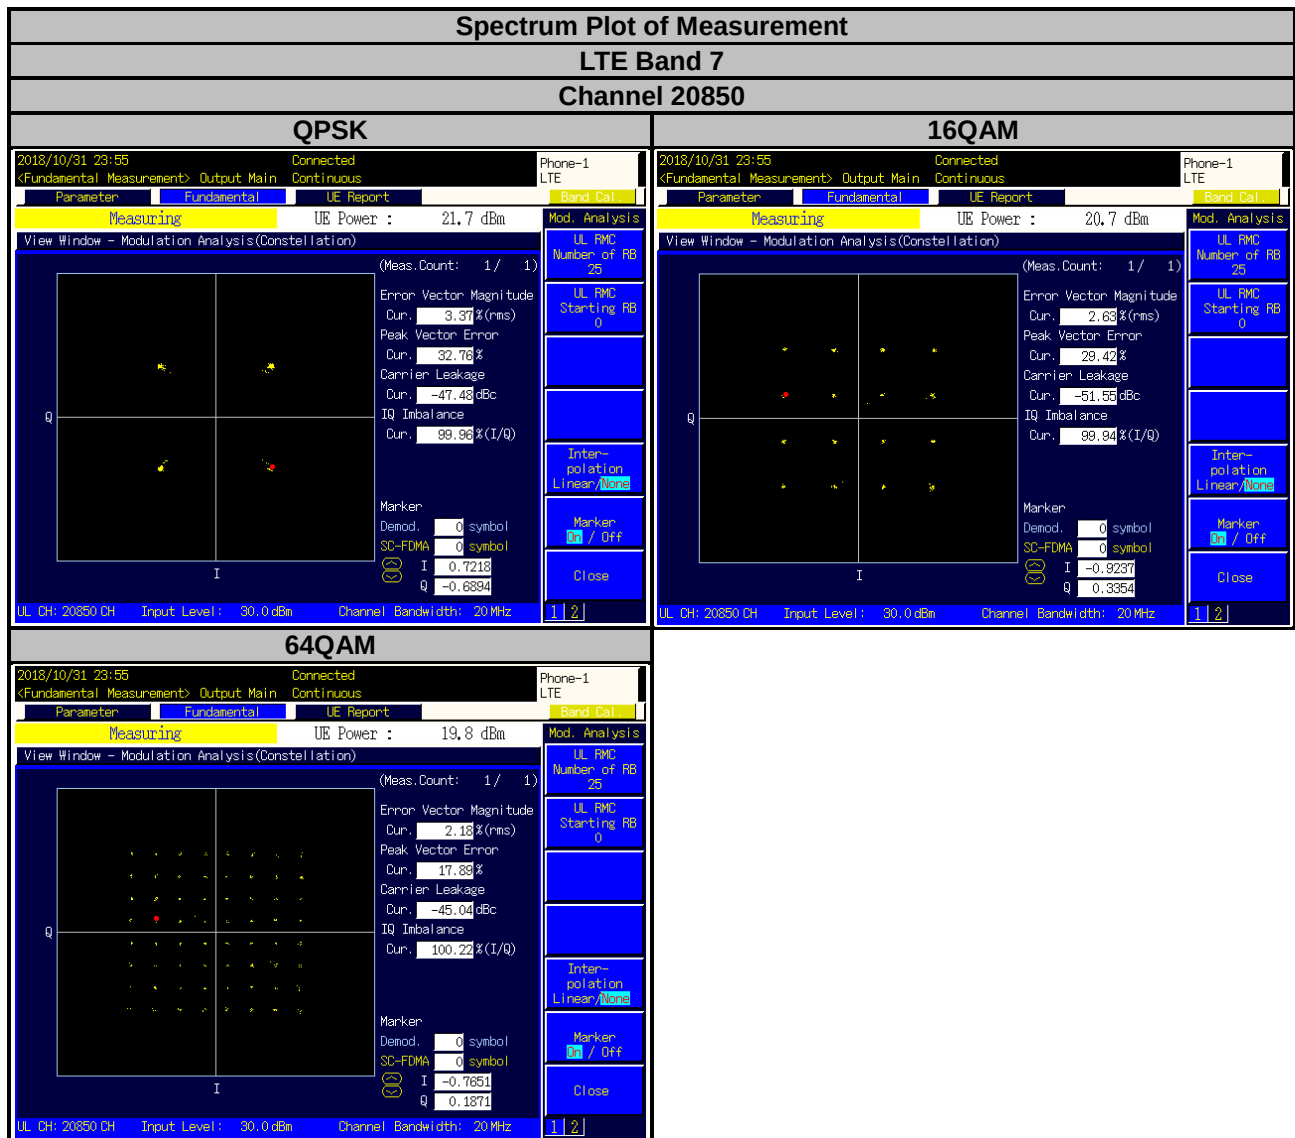


Spectrum Plot of Measurement


LTE Band 38

Channel 37850


QPSK

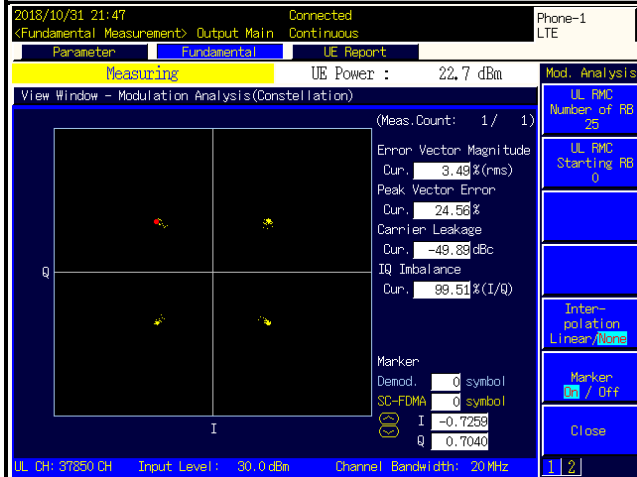

16QAM

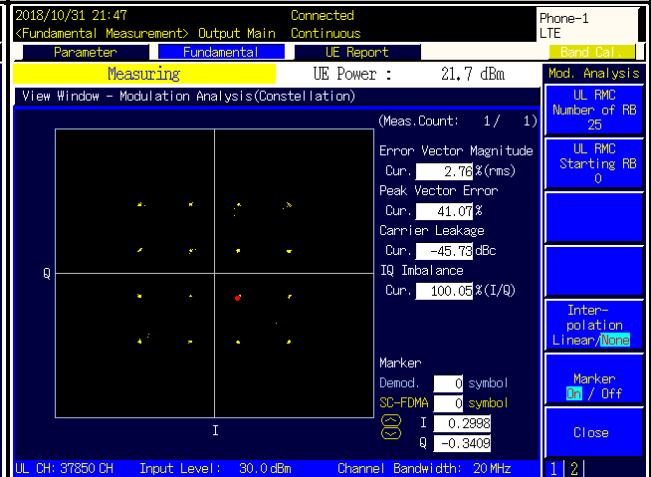

64QAM

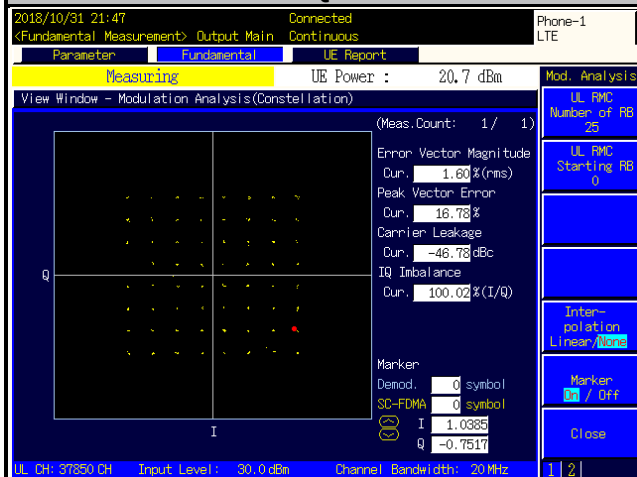



Spectrum Plot of Measurement

LTE Band 41


Channel 40620

QPSK

16QAM

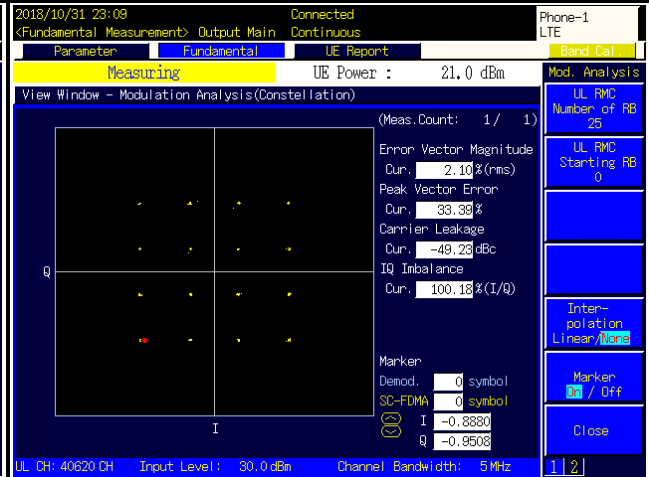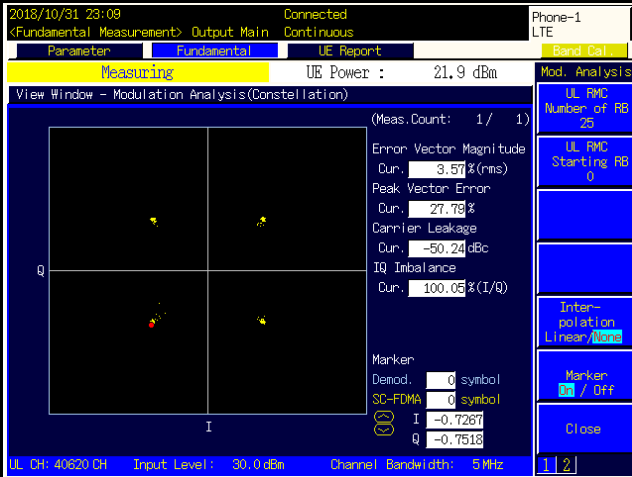

64QAM

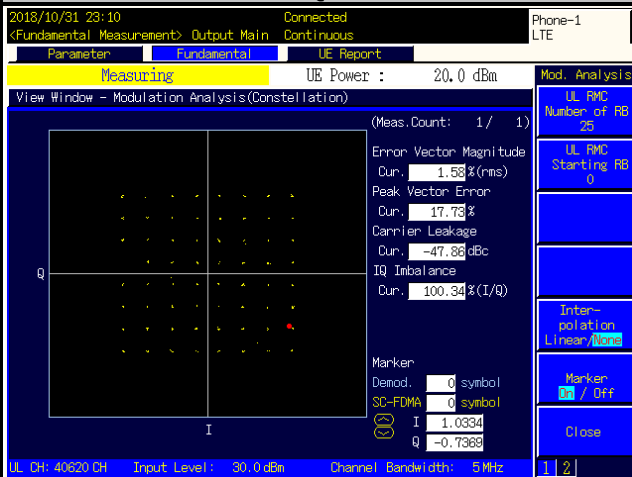

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

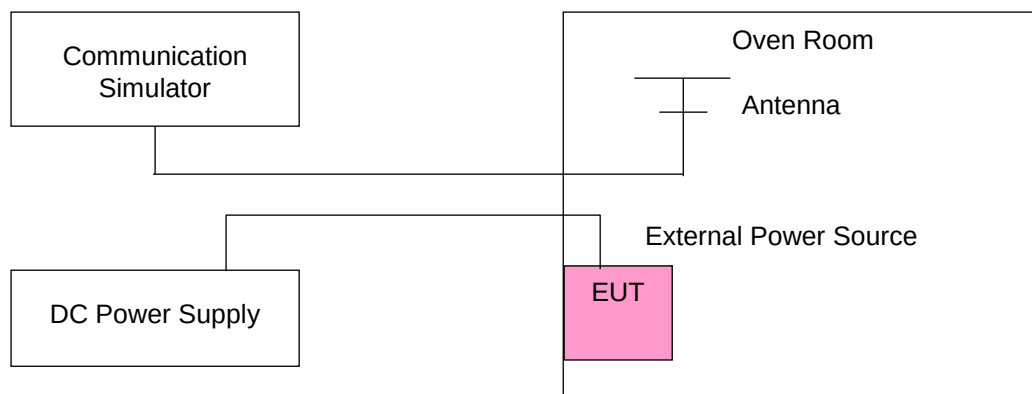

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2502.500003	0.0010	2567.500002	0.0008
3.6	2502.500003	0.0012	2567.500004	0.0016
4.4	2502.500003	0.0013	2567.500001	0.0004

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2502.500002	0.0006	2567.500004	0.0015
-20	2502.500003	0.0010	2567.500002	0.0007
-10	2502.500003	0.0010	2567.500004	0.0014
0	2502.500002	0.0006	2567.500003	0.0011
10	2502.500002	0.0007	2567.500003	0.0012
20	2502.499998	-0.0007	2567.499996	-0.0016
30	2502.499997	-0.0012	2567.499996	-0.0015
40	2502.499998	-0.0008	2567.499998	-0.0006
50	2502.499998	-0.0010	2567.499997	-0.0011
55	2502.499998	-0.0007	2567.499999	-0.0005

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2505.000003	0.0014	2565.000002	0.0007
3.6	2505.000004	0.0014	2565.000004	0.0015
4.4	2505.000002	0.0008	2565.000003	0.0012

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2505.000001	0.0005	2565.000001	0.0005
-20	2505.000003	0.0013	2565.000004	0.0016
-10	2505.000002	0.0008	2565.000003	0.0012
0	2505.000003	0.0010	2565.000001	0.0005
10	2505.000002	0.0009	2565.000002	0.0009
20	2504.999998	-0.0010	2564.999997	-0.0013
30	2504.999997	-0.0010	2564.999998	-0.0006
40	2504.999998	-0.0009	2564.999997	-0.0014
50	2504.999998	-0.0007	2564.999998	-0.0008
55	2504.999998	-0.0009	2564.999997	-0.0013

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2507.500002	0.0006	2562.500004	0.0015
3.6	2507.500002	0.0006	2562.500003	0.0012
4.4	2507.500001	0.0006	2562.500004	0.0015

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2507.500002	0.0006	2562.500002	0.0006
-20	2507.500001	0.0004	2562.500002	0.0009
-10	2507.500003	0.0012	2562.500003	0.0012
0	2507.500002	0.0008	2562.500003	0.0012
10	2507.500002	0.0009	2562.500002	0.0008
20	2507.499997	-0.0014	2562.499999	-0.0004
30	2507.499997	-0.0014	2562.499996	-0.0015
40	2507.499999	-0.0006	2562.499999	-0.0004
50	2507.499998	-0.0006	2562.499996	-0.0015
55	2507.499998	-0.0006	2562.499997	-0.0012

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2510.000001	0.0005	2560.000002	0.0009
3.6	2510.000004	0.0015	2560.000002	0.0008
4.4	2510.000002	0.0008	2560.000004	0.0016

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 7			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2510.000001	0.0005	2560.000002	0.0007
-20	2510.000003	0.0010	2560.000003	0.0011
-10	2510.000003	0.0010	2560.000003	0.0010
0	2510.000001	0.0004	2560.000004	0.0014
10	2510.000002	0.0007	2560.000001	0.0004
20	2509.999999	-0.0004	2559.999998	-0.0009
30	2509.999997	-0.0014	2559.999997	-0.0012
40	2509.999999	-0.0006	2559.999997	-0.0012
50	2509.999998	-0.0010	2559.999998	-0.0008
55	2509.999998	-0.0008	2559.999997	-0.0011

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2572.500001	0.0005	2617.500002	0.0006
3.6	2572.500004	0.0014	2617.500002	0.0007
4.4	2572.500004	0.0015	2617.500002	0.0007

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2572.500004	0.0014	2617.500002	0.0006
-20	2572.500003	0.0011	2617.500003	0.0013
-10	2572.500004	0.0016	2617.500004	0.0015
0	2572.500002	0.0009	2617.500002	0.0006
10	2572.500002	0.0007	2617.500002	0.0009
20	2572.499997	-0.0012	2617.499999	-0.0005
30	2572.499997	-0.0010	2617.499997	-0.0011
40	2572.499996	-0.0014	2617.499996	-0.0014
50	2572.499996	-0.0014	2617.499996	-0.0015
55	2572.499998	-0.0010	2617.499999	-0.0005

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2575.000004	0.0015	2615.000003	0.0013
3.6	2575.000001	0.0005	2615.000002	0.0007
4.4	2575.000003	0.0012	2615.000003	0.0012

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2575.000003	0.0010	2615.000004	0.0015
-20	2575.000001	0.0005	2615.000003	0.0012
-10	2575.000002	0.0008	2615.000002	0.0008
0	2575.000004	0.0014	2615.000003	0.0012
10	2575.000002	0.0009	2615.000002	0.0008
20	2574.999996	-0.0015	2614.999997	-0.0010
30	2574.999997	-0.0010	2614.999998	-0.0008
40	2574.999997	-0.0012	2614.999998	-0.0008
50	2574.999998	-0.0007	2614.999999	-0.0005
55	2574.999998	-0.0008	2614.999997	-0.0011

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2577.500003	0.0012	2612.500001	0.0005
3.6	2577.500004	0.0015	2612.500004	0.0015
4.4	2577.500004	0.0016	2612.500002	0.0006

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2577.500002	0.0009	2612.500003	0.0012
-20	2577.500002	0.0009	2612.500003	0.0010
-10	2577.500003	0.0013	2612.500003	0.0011
0	2577.500002	0.0007	2612.500003	0.0011
10	2577.500003	0.0010	2612.500001	0.0004
20	2577.499996	-0.0014	2612.499998	-0.0007
30	2577.499997	-0.0010	2612.499998	-0.0009
40	2577.499997	-0.0012	2612.499998	-0.0007
50	2577.499997	-0.0012	2612.499998	-0.0009
55	2577.499997	-0.0012	2612.499998	-0.0006

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 38			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2580.000001	0.0004	2610.000002	0.0009
3.6	2580.000002	0.0008	2610.000001	0.0005
4.4	2580.000001	0.0005	2610.000000	0.0008

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 38			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2580.000004	0.0014	2610.000002	0.0006
-20	2580.000002	0.0006	2610.000003	0.0010
-10	2580.000002	0.0006	2610.000004	0.0014
0	2580.000003	0.0011	2610.000004	0.0013
10	2580.000004	0.0016	2610.000002	0.0008
20	2579.999998	-0.0008	2609.999999	-0.0006
30	2579.999996	-0.0014	2609.999997	-0.0013
40	2579.999996	-0.0014	2609.999998	-0.0008
50	2579.999998	-0.0009	2609.999998	-0.0010
55	2579.999998	-0.0007	2609.999999	-0.0006

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2498.500003	0.0012	2687.500004	0.0013
3.6	2498.500002	0.0006	2687.500003	0.0009
4.4	2498.500004	0.0016	2687.500001	0.0004

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2498.500002	0.0007	2687.500004	0.0014
-20	2498.500002	0.0008	2687.500003	0.0012
-10	2498.500001	0.0006	2687.500002	0.0007
0	2498.500003	0.0010	2687.500001	0.0004
10	2498.500001	0.0006	2687.500003	0.0011
20	2498.499997	-0.0012	2687.499999	-0.0004
30	2498.499997	-0.0012	2687.499997	-0.0010
40	2498.499996	-0.0015	2687.499997	-0.0010
50	2498.499999	-0.0004	2687.499998	-0.0006
55	2498.499997	-0.0012	2687.499999	-0.0005

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2501.000003	0.0010	2685.000002	0.0006
3.6	2501.000002	0.0006	2685.000003	0.0010
4.4	2501.000003	0.0012	2685.000001	0.0004

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2501.000003	0.0010	2685.000002	0.0007
-20	2501.000004	0.0015	2685.000003	0.0010
-10	2501.000003	0.0011	2685.000003	0.0009
0	2501.000003	0.0012	2685.000001	0.0004
10	2501.000004	0.0014	2685.000001	0.0004
20	2500.999997	-0.0013	2684.999997	-0.0012
30	2500.999997	-0.0012	2684.999996	-0.0015
40	2500.999998	-0.0010	2684.999997	-0.0012
50	2500.999998	-0.0008	2684.999997	-0.0012
55	2500.999996	-0.0016	2684.999996	-0.0015

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2503.500004	0.0015	2682.500004	0.0014
3.6	2503.500001	0.0004	2682.500002	0.0006
4.4	2503.500001	0.0004	2682.500002	0.0008

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2503.500003	0.0013	2682.500004	0.0013
-20	2503.500004	0.0016	2682.500002	0.0007
-10	2503.500001	0.0005	2682.500001	0.0004
0	2503.500004	0.0015	2682.500003	0.0012
10	2503.500002	0.0009	2682.500001	0.0005
20	2503.499996	-0.0014	2682.499997	-0.0010
30	2503.499998	-0.0008	2682.499999	-0.0004
40	2503.499999	-0.0006	2682.499996	-0.0015
50	2503.499997	-0.0011	2682.499998	-0.0008
55	2503.499998	-0.0009	2682.499997	-0.0010

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 41			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	2506.000004	0.0015	2680.000004	0.0014
3.6	2506.000004	0.0016	2680.000004	0.0015
4.4	2506.000004	0.0015	2680.000003	0.0012

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 41			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	2506.000004	0.0015	2680.000003	0.0010
-20	2506.000003	0.0013	2680.000001	0.0004
-10	2506.000002	0.0007	2680.000001	0.0004
0	2506.000003	0.0014	2680.000003	0.0013
10	2506.000003	0.0014	2680.000003	0.0013
20	2505.999998	-0.0009	2679.999999	-0.0006
30	2505.999998	-0.0010	2679.999996	-0.0014
40	2505.999998	-0.0006	2679.999996	-0.0014
50	2505.999998	-0.0009	2679.999997	-0.0012
55	2505.999997	-0.0012	2679.999996	-0.0014

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.4.3 Test Setup

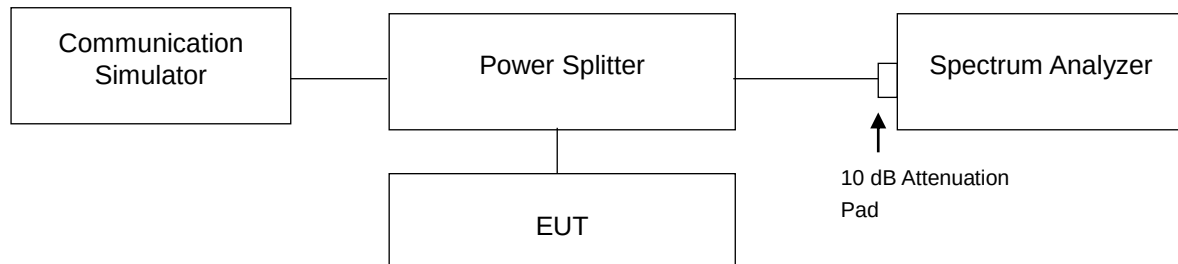

4.4.4 Test Results

<99 % Occupied Bandwidth>


LTE Band 7									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20775	2502.5	4.4877	4.4925	4.4982	20800	2505.0	8.9524	8.9580	8.9602
21100	2535.0	4.4910	4.4909	4.4978	21100	2535.0	8.9630	8.9637	8.9706
21425	2567.5	4.4904	4.4948	4.5044	21400	2565.0	8.9683	8.9727	8.9756

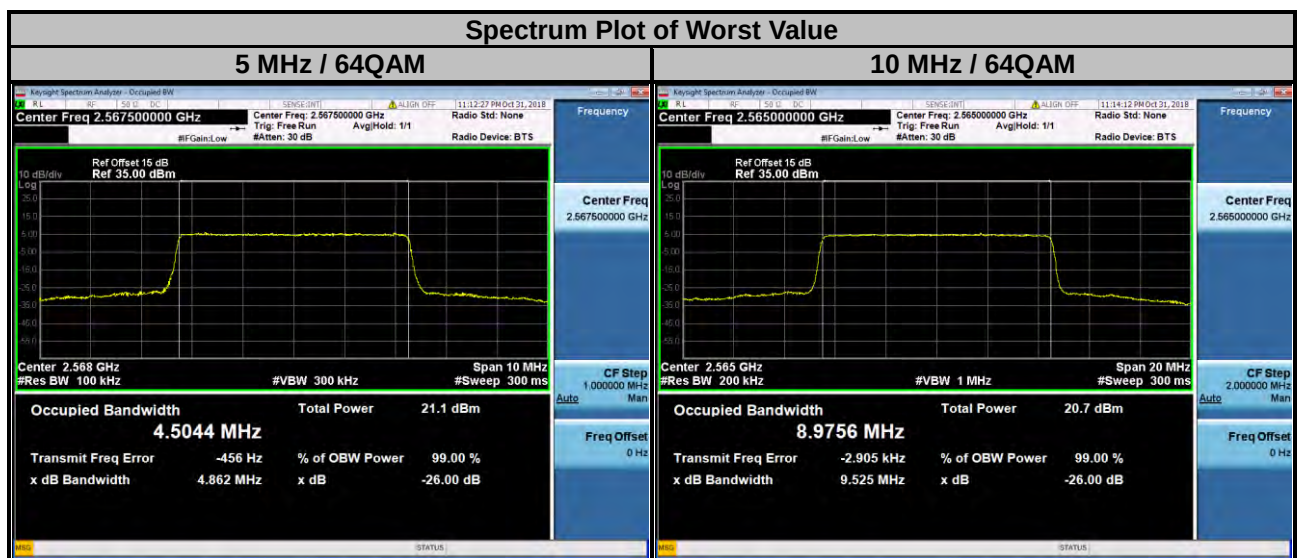

LTE Band 7

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20825	2507.5	13.439	13.428	13.422	20850	2510.0	17.914	17.937	17.924
21100	2535.0	13.447	13.435	13.425	21100	2535.0	17.896	17.962	17.913
21375	2562.5	13.452	13.441	13.436	21350	2560.0	17.929	17.944	17.948


Spectrum Plot of Worst Value

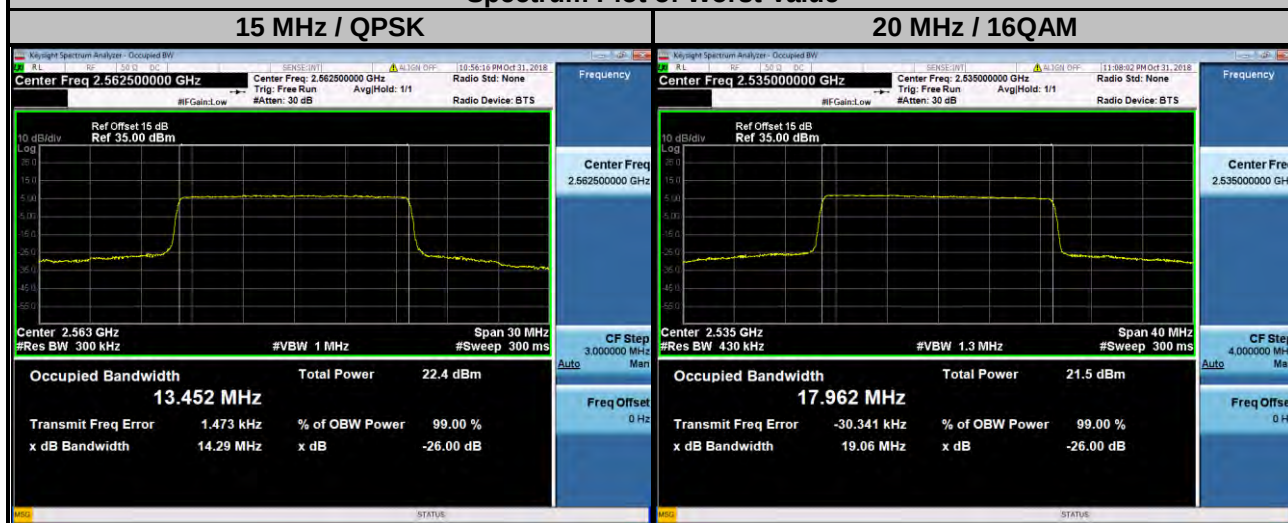

LTE Band 38

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37775	2572.5	4.4886	4.4891	4.4994	37800	2575.0	8.9563	8.9736	8.9633
38000	2595.0	4.4910	4.4861	4.4988	38000	2595.0	8.9566	8.9658	8.9641
38225	2617.5	4.4916	4.4909	4.5010	38200	2615.0	8.9550	8.9680	8.9668


Spectrum Plot of Worst Value

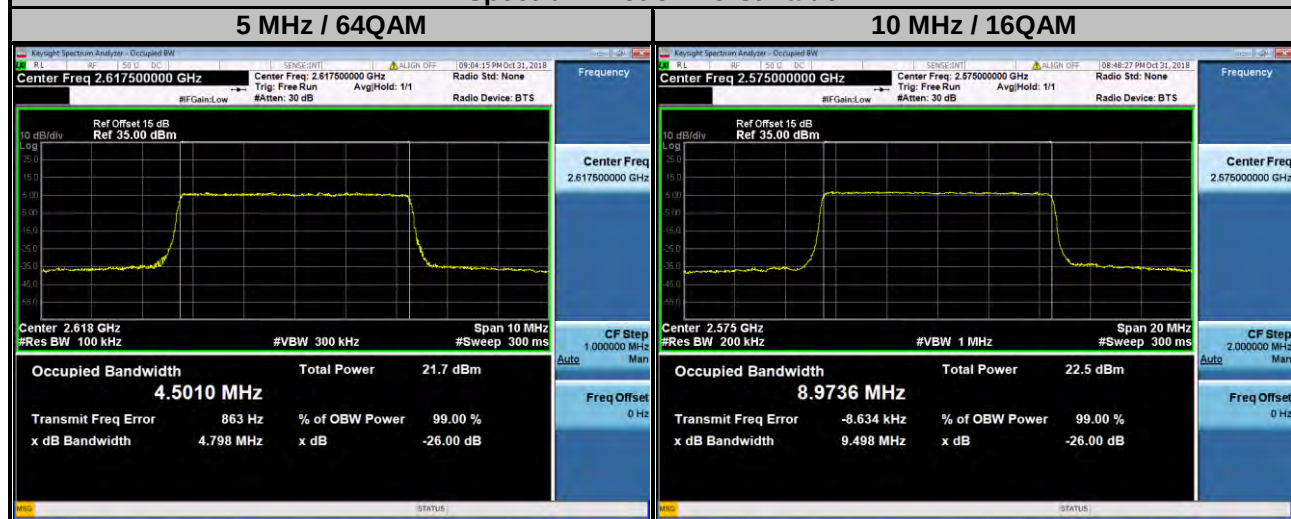

LTE Band 38

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37825	2577.5	13.444	13.435	13.437	37850	2580.0	17.912	17.908	17.930
38000	2595.0	13.435	13.439	13.437	38000	2595.0	17.914	17.909	17.923
38175	2612.5	13.447	13.433	13.438	38150	2610.0	17.917	17.903	17.924

Spectrum Plot of Worst Value

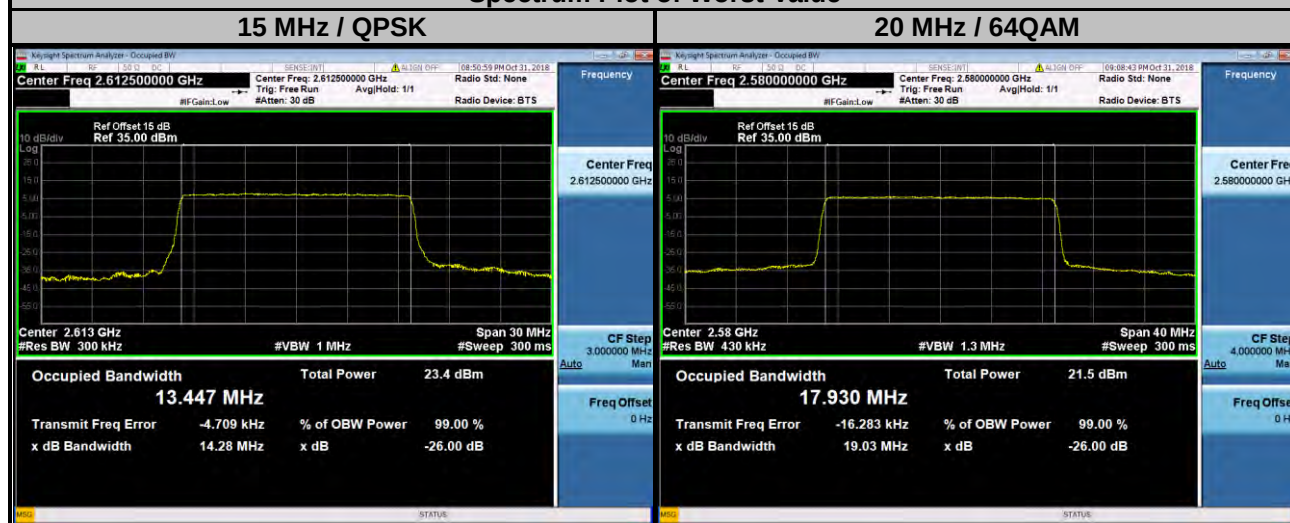

LTE Band 41


Channel Bandwidth: 5 MHz

Channel Bandwidth: 10 MHz

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39675	2498.5	4.4944	4.4883	4.4958	39700	2501.0	8.9518	8.9646	8.9635
40620	2593.0	4.4905	4.4917	4.5047	40620	2593.0	8.9518	8.9667	8.9685
41565	2687.5	4.4948	4.4906	4.5010	41540	2685.0	8.9584	8.9651	8.9638

Spectrum Plot of Worst Value

5 MHz / 64QAM

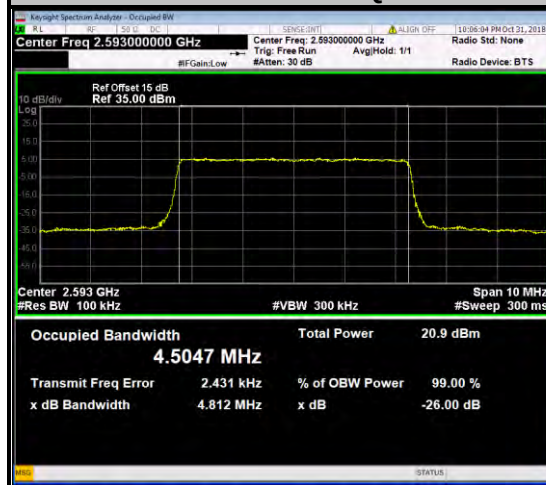

10 MHz / 64QAM



LTE Band 41


Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39725	2503.5	13.434	13.423	13.430	39750	2506.0	17.898	17.901	17.916
40620	2593.0	13.442	13.431	13.430	40620	2593.0	17.897	17.901	17.918
41515	2682.5	13.443	13.431	13.436	41490	2680.0	17.863	17.860	17.879

Spectrum Plot of Worst Value



<26 dB Bandwidth>

LTE Band 7									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20775	2502.5	4.808	4.811	4.828	20800	2505.0	9.521	9.507	9.511
21100	2535.0	4.818	4.812	4.841	21100	2535.0	9.520	9.527	9.534
21425	2567.5	4.832	4.811	4.862	21400	2565.0	9.545	9.527	9.525

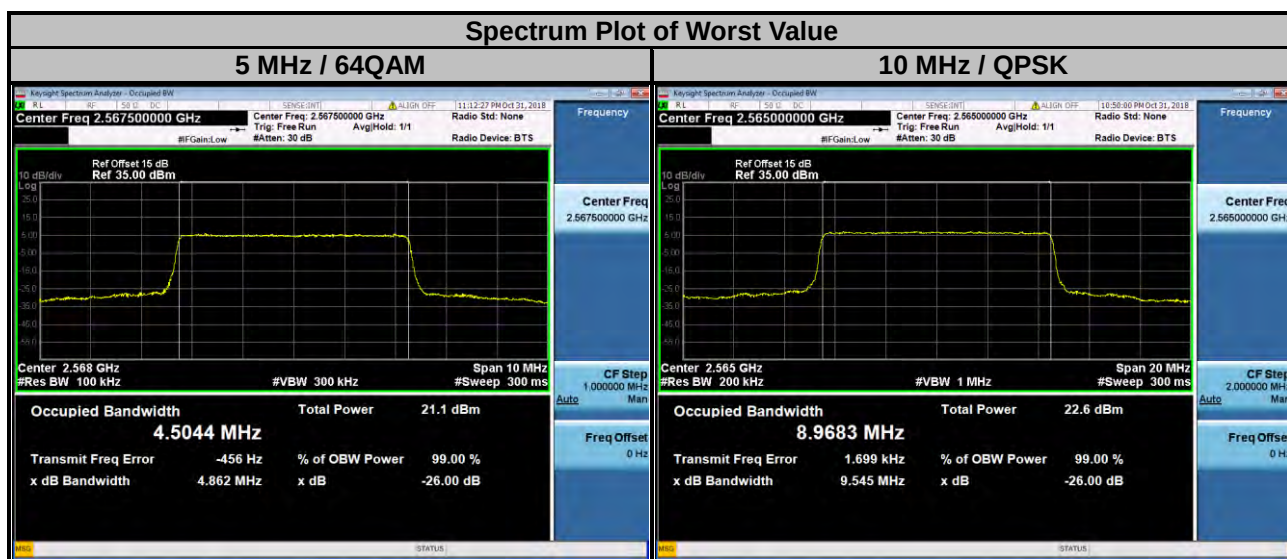

LTE Band 7

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20825	2507.5	14.25	14.24	14.24	20850	2510.0	19.07	19.04	19.04
21100	2535.0	14.29	14.25	14.23	21100	2535.0	19.08	19.06	19.02
21375	2562.5	14.29	14.25	14.27	21350	2560.0	19.08	19.06	19.06


Spectrum Plot of Worst Value



LTE Band 38

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37775	2572.5	4.816	4.795	4.808	37800	2575.0	9.498	9.498	9.505
38000	2595.0	4.828	4.806	4.792	38000	2595.0	9.500	9.498	9.501
38225	2617.5	4.823	4.811	4.798	38200	2615.0	9.511	9.503	9.503

Spectrum Plot of Worst Value

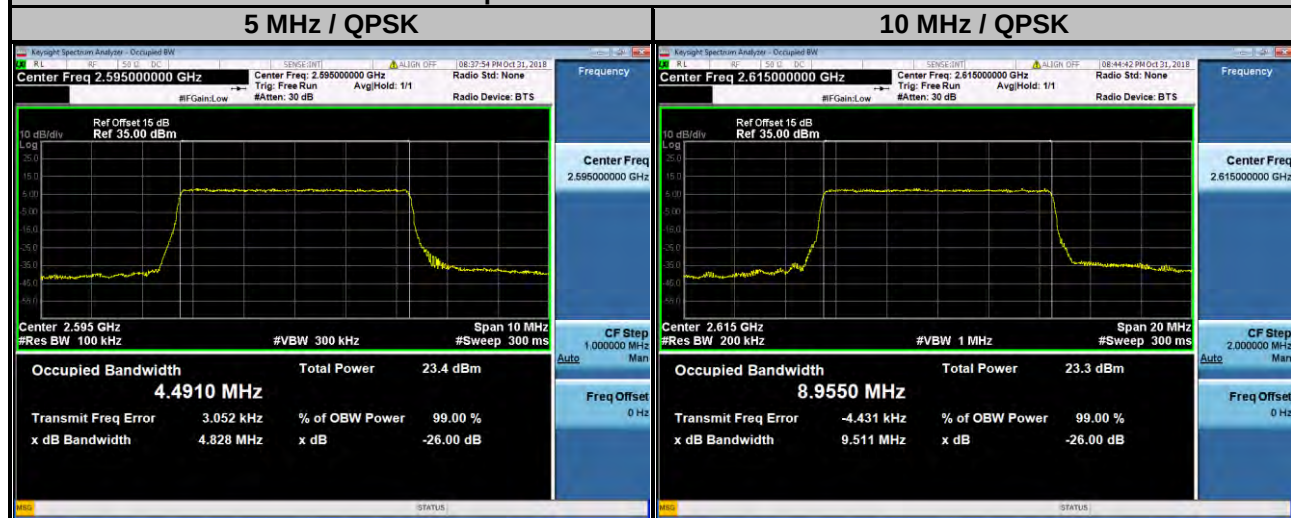

LTE Band 38

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37825	2577.5	14.28	14.21	14.25	37850	2580.0	19.06	19.01	19.03
38000	2595.0	14.28	14.22	14.25	38000	2595.0	19.04	19.01	19.04
38175	2612.5	14.28	14.24	14.24	38150	2610.0	19.03	19.02	19.04

Spectrum Plot of Worst Value



LTE Band 41


Channel Bandwidth: 5 MHz

Channel Bandwidth: 10 MHz

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39675	2498.5	4.826	4.794	4.795	39700	2501.0	9.492	9.492	9.512
40620	2593.0	4.811	4.787	4.812	40620	2593.0	9.496	9.505	9.506
41565	2687.5	4.817	4.805	4.823	41540	2685.0	9.517	9.507	9.508

Spectrum Plot of Worst Value

5 MHz / QPSK

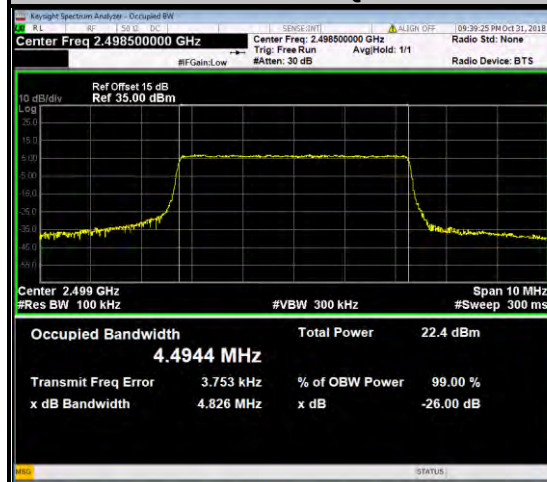


10 MHz / QPSK



LTE Band 41

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39725	2503.5	14.26	14.22	14.24	39750	2506.0	19.04	18.99	19.02
40620	2593.0	14.27	14.23	14.24	40620	2593.0	19.02	19.01	19.02
41515	2682.5	14.28	14.24	14.26	41490	2680.0	19.00	18.99	19.01

Spectrum Plot of Worst Value

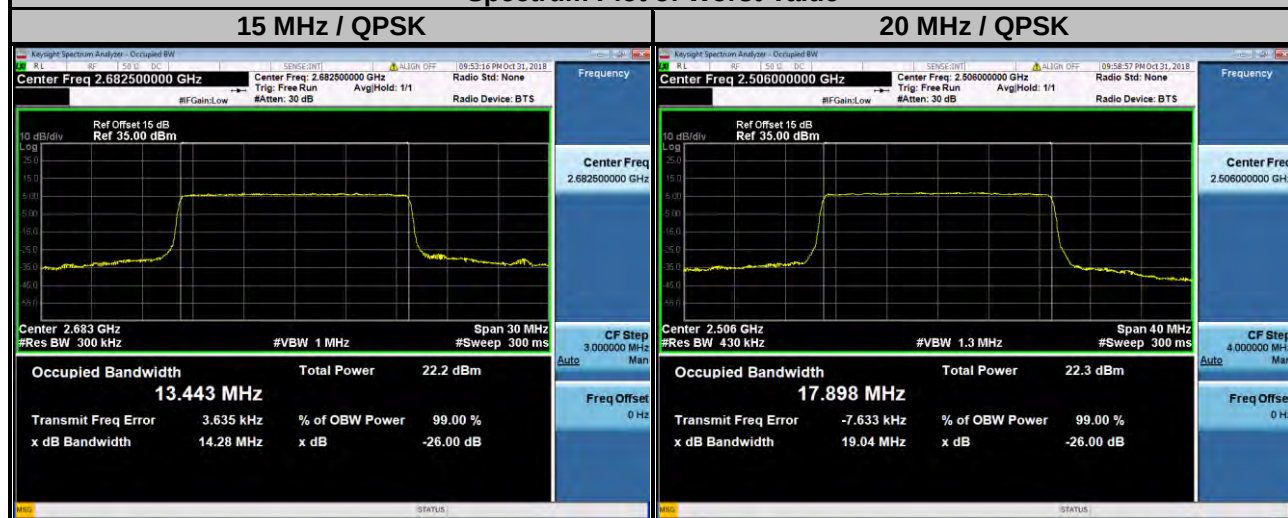


4.5 Out-of-Band Emissions Measurement

4.5.1 Limits of Out-of-Band Emissions Measurement

According to FCC 27.53 (m)(4)&(6) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed.


4.5.2 Test Setup

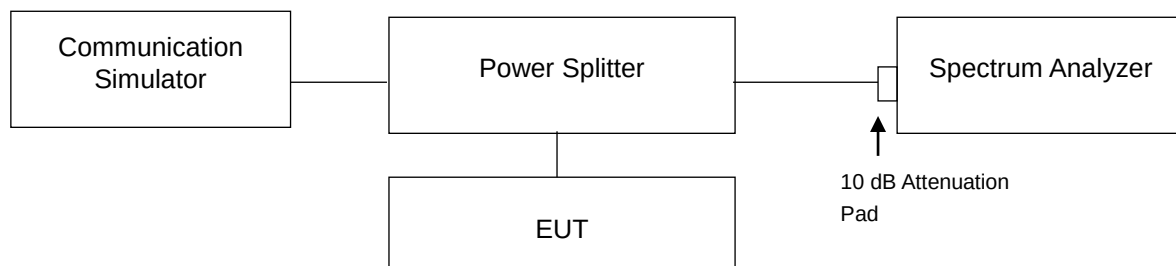

4.5.3 Test Procedures


- The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- The out-of-band emissions measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the max. trace plot into the test report.

4.5.4 Test Results

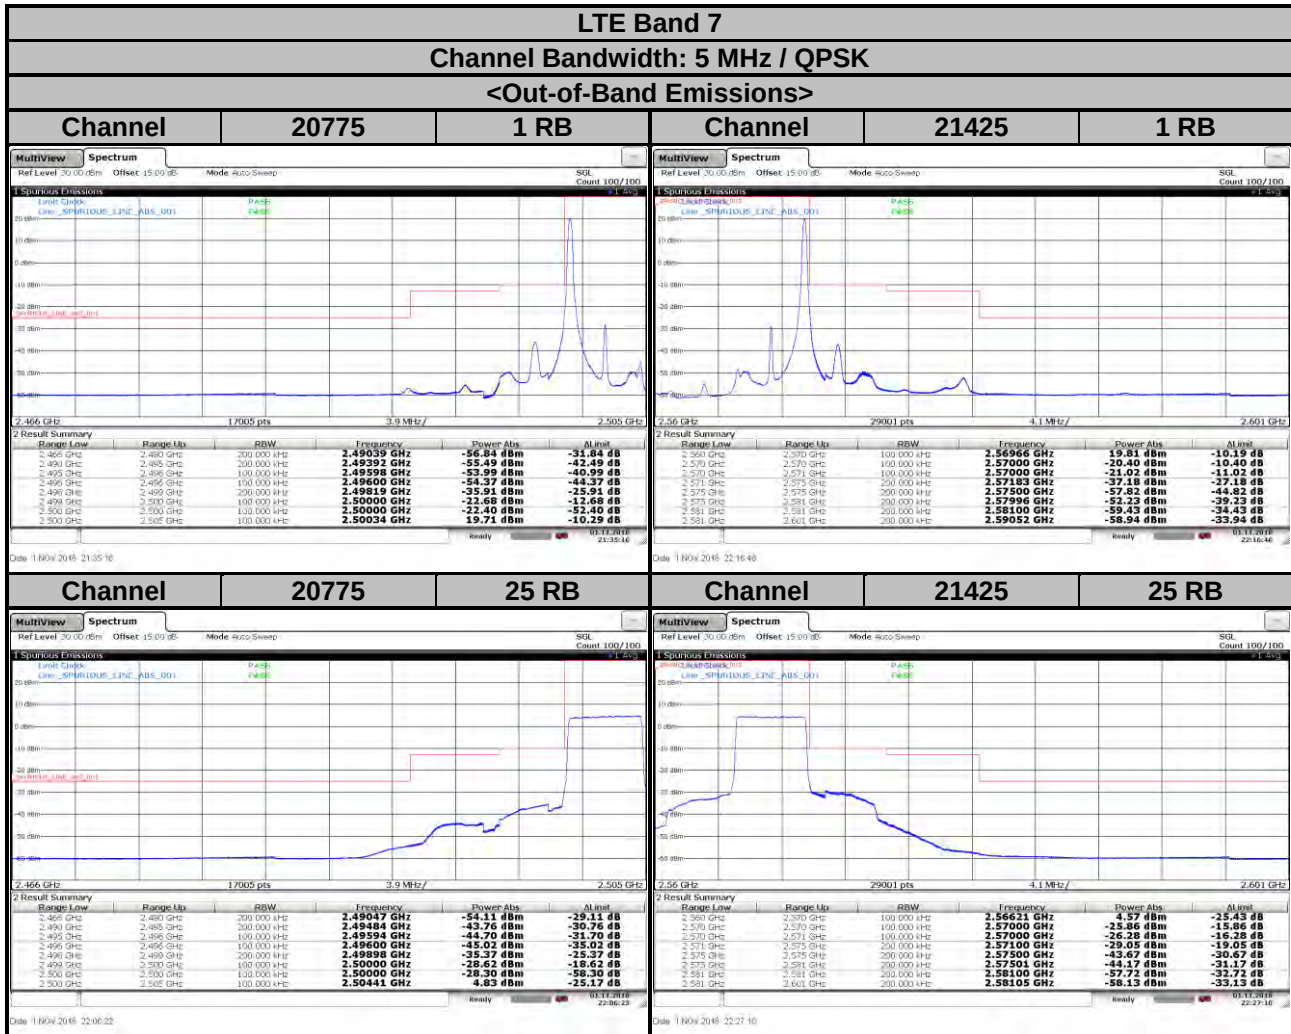


LTE Band 7
Channel Bandwidth: 5 MHz / 16QAM


<Out-of-Band Emissions>

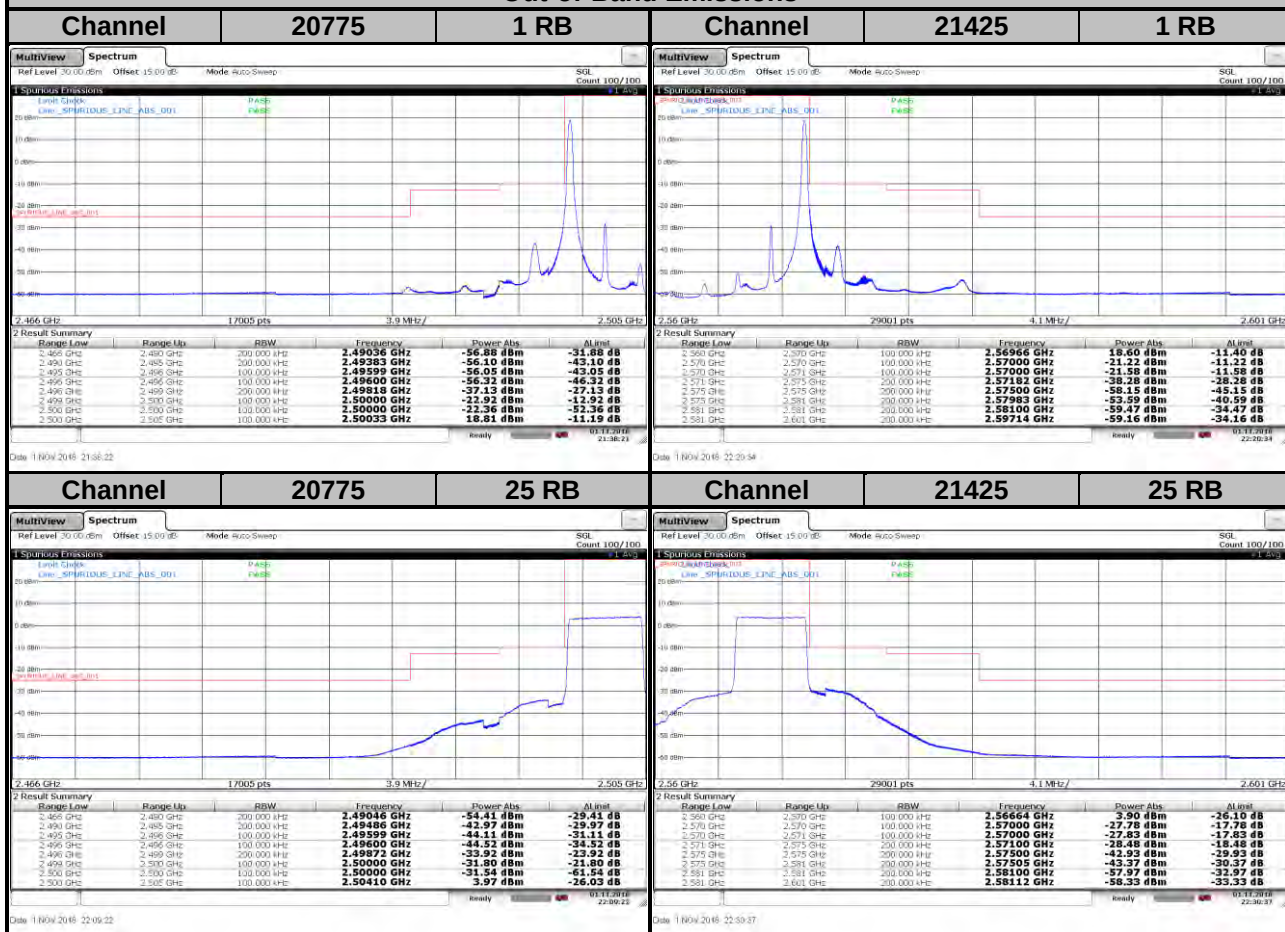



LTE Band 7
Channel Bandwidth: 5 MHz / 64QAM


<Out-of-Band Emissions>

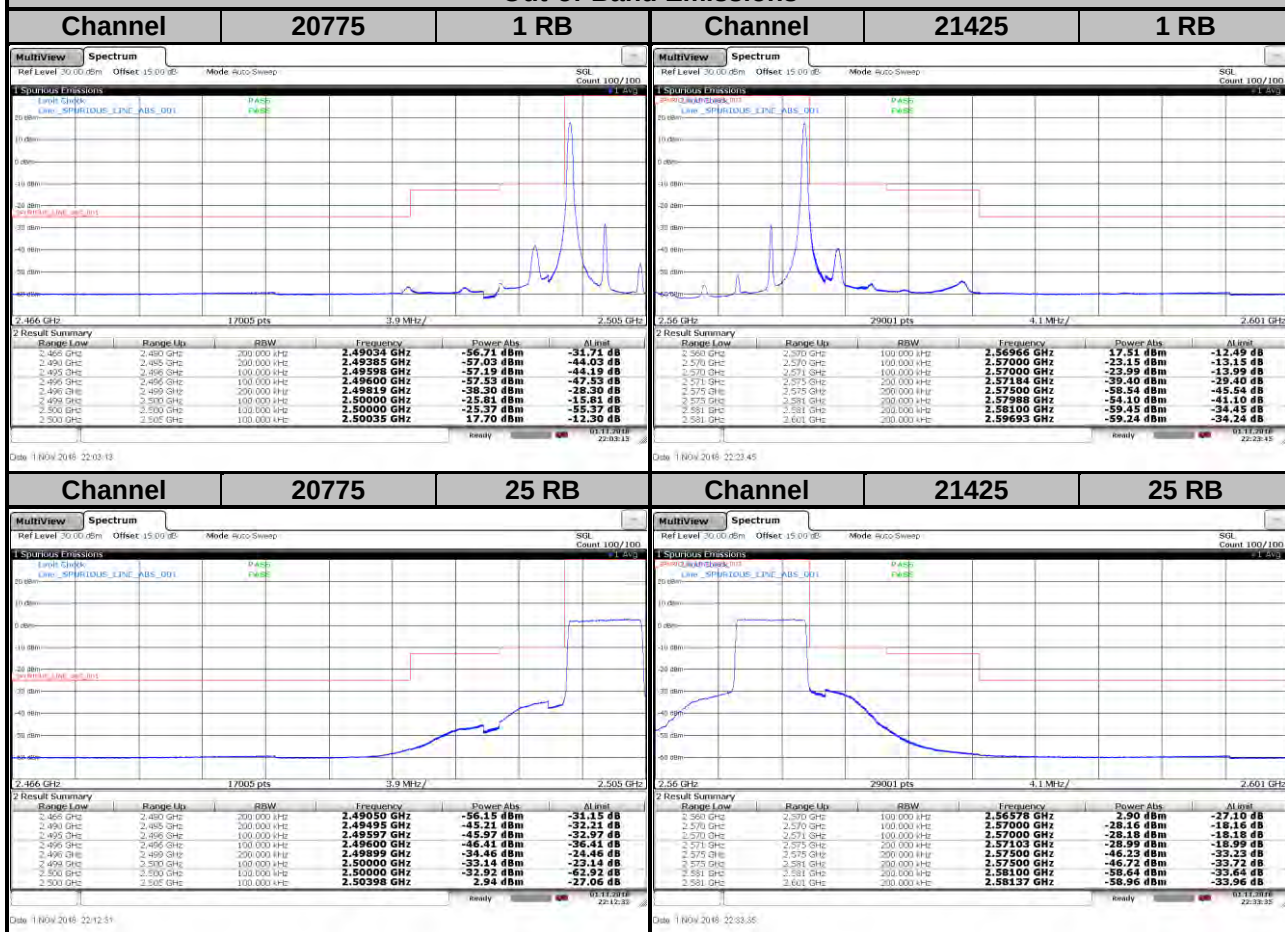


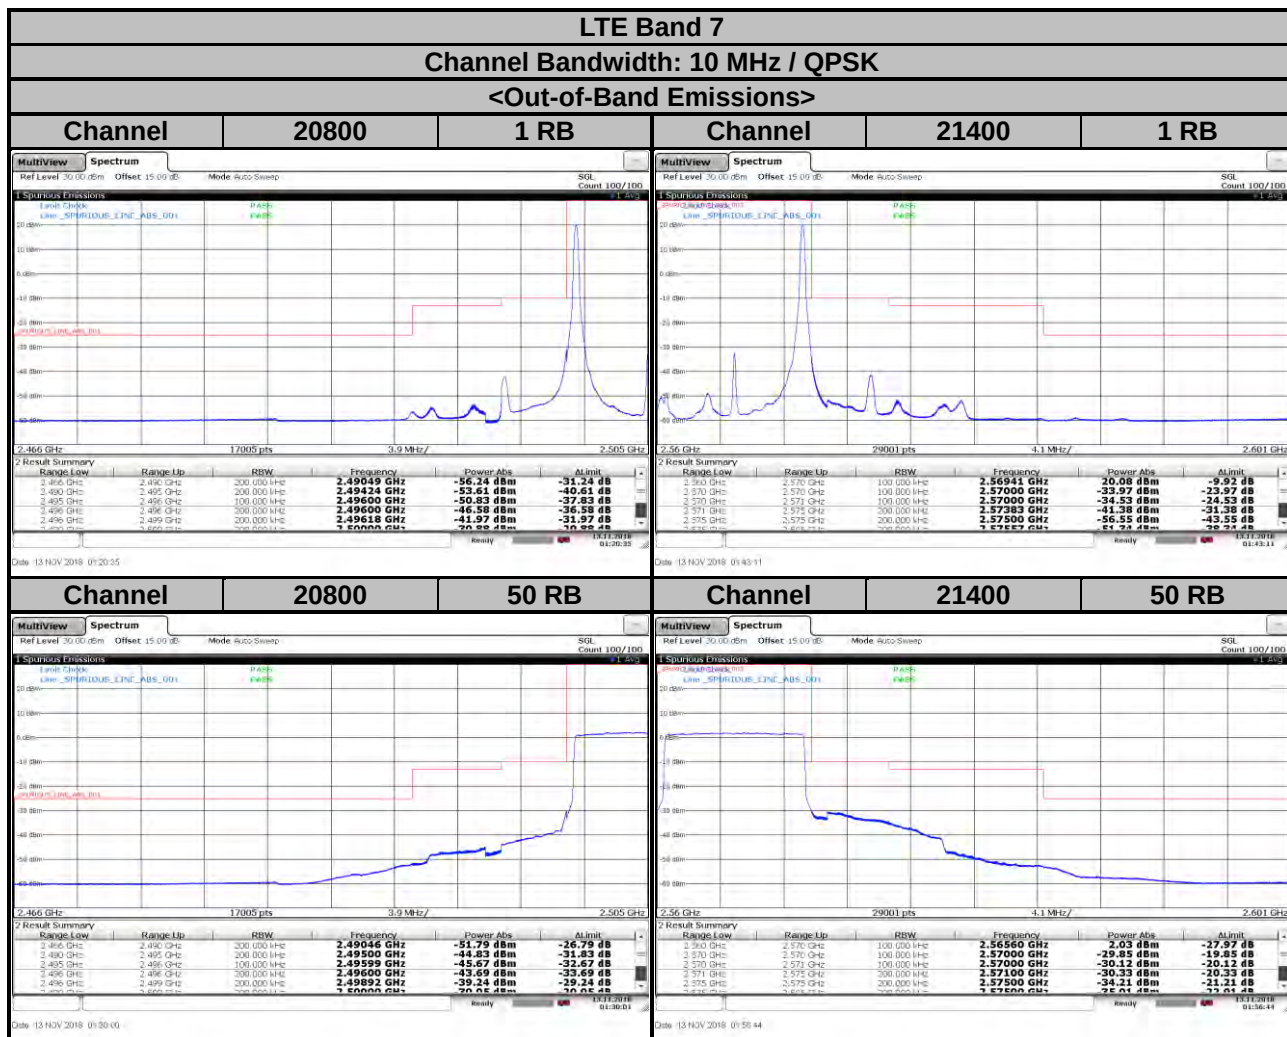


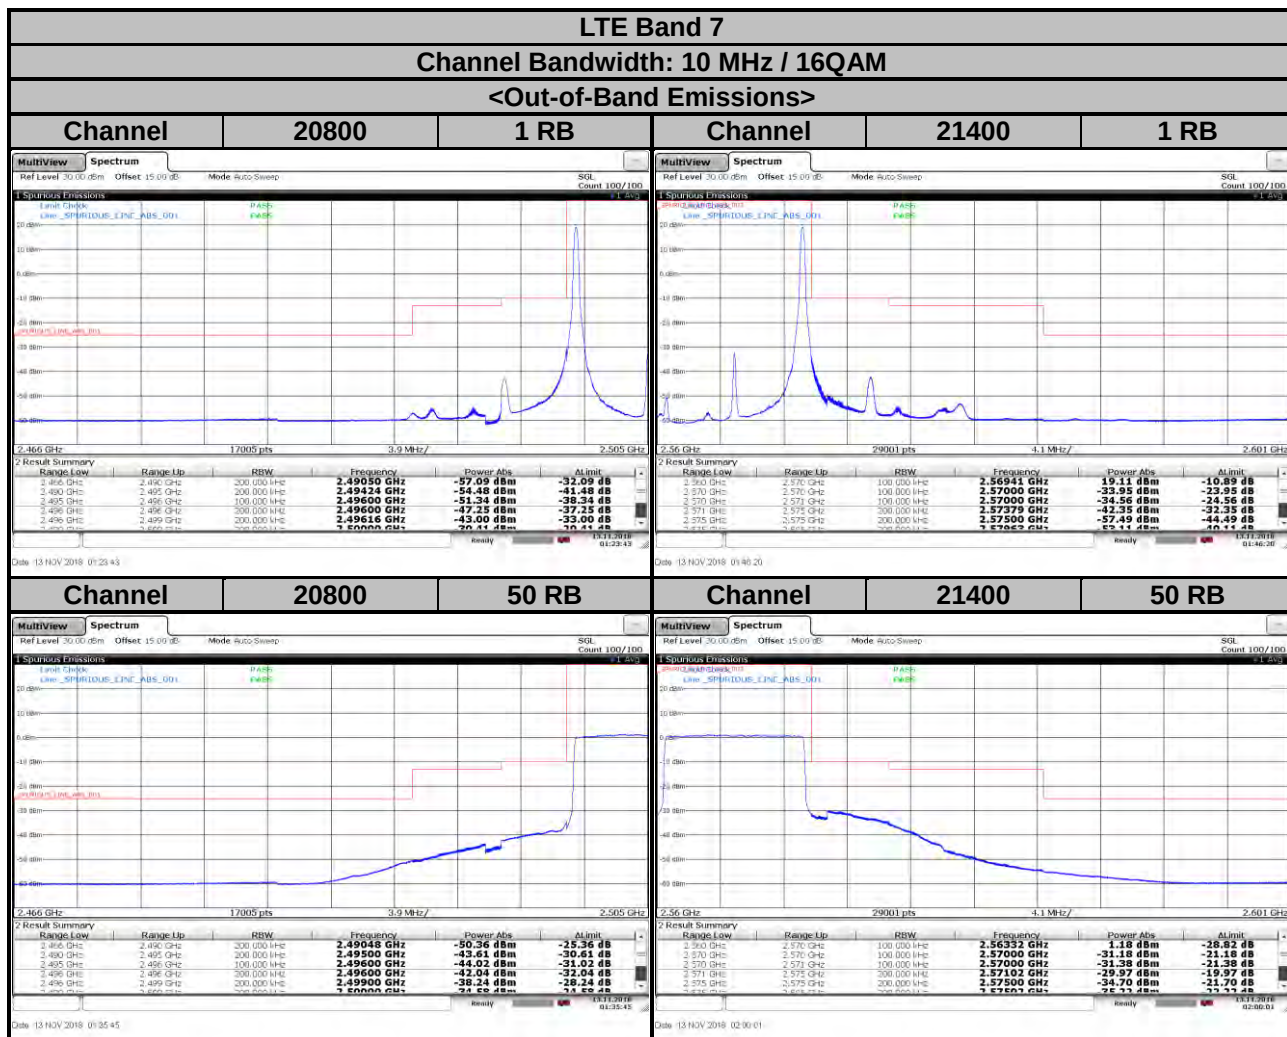


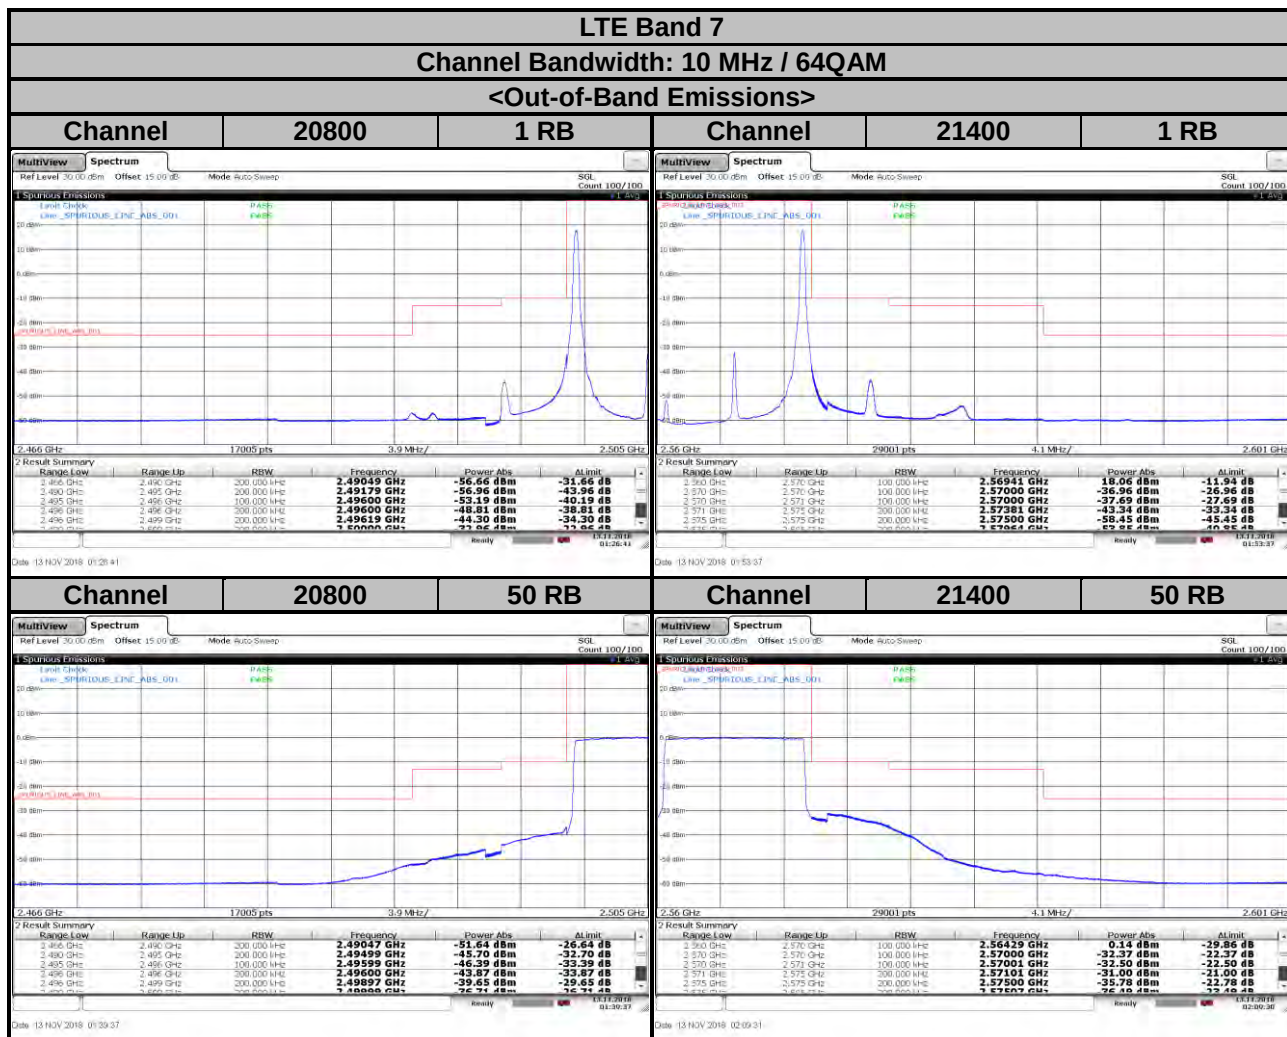

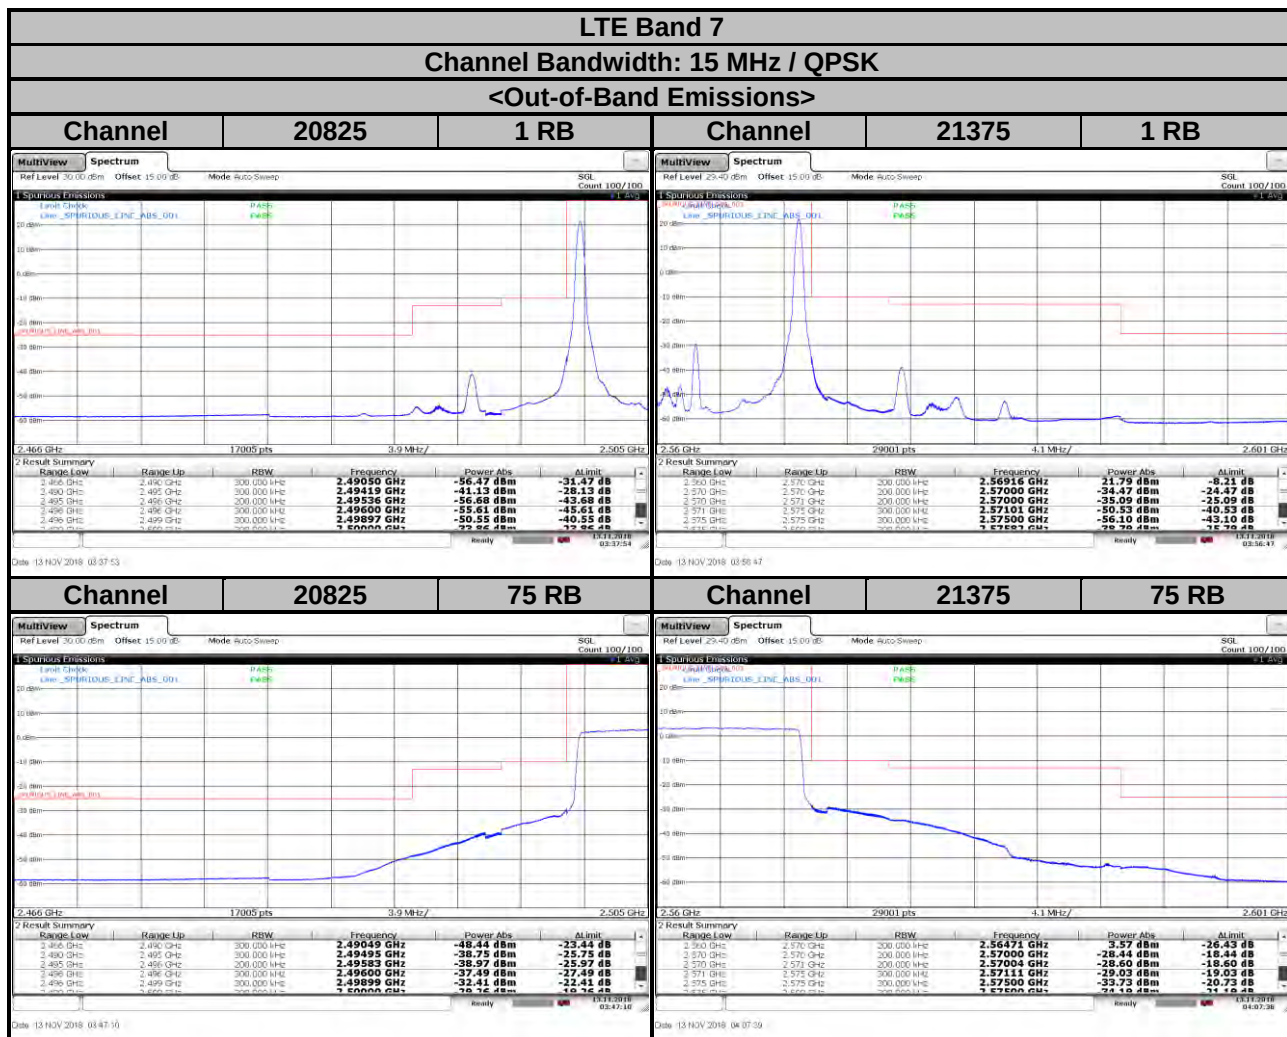


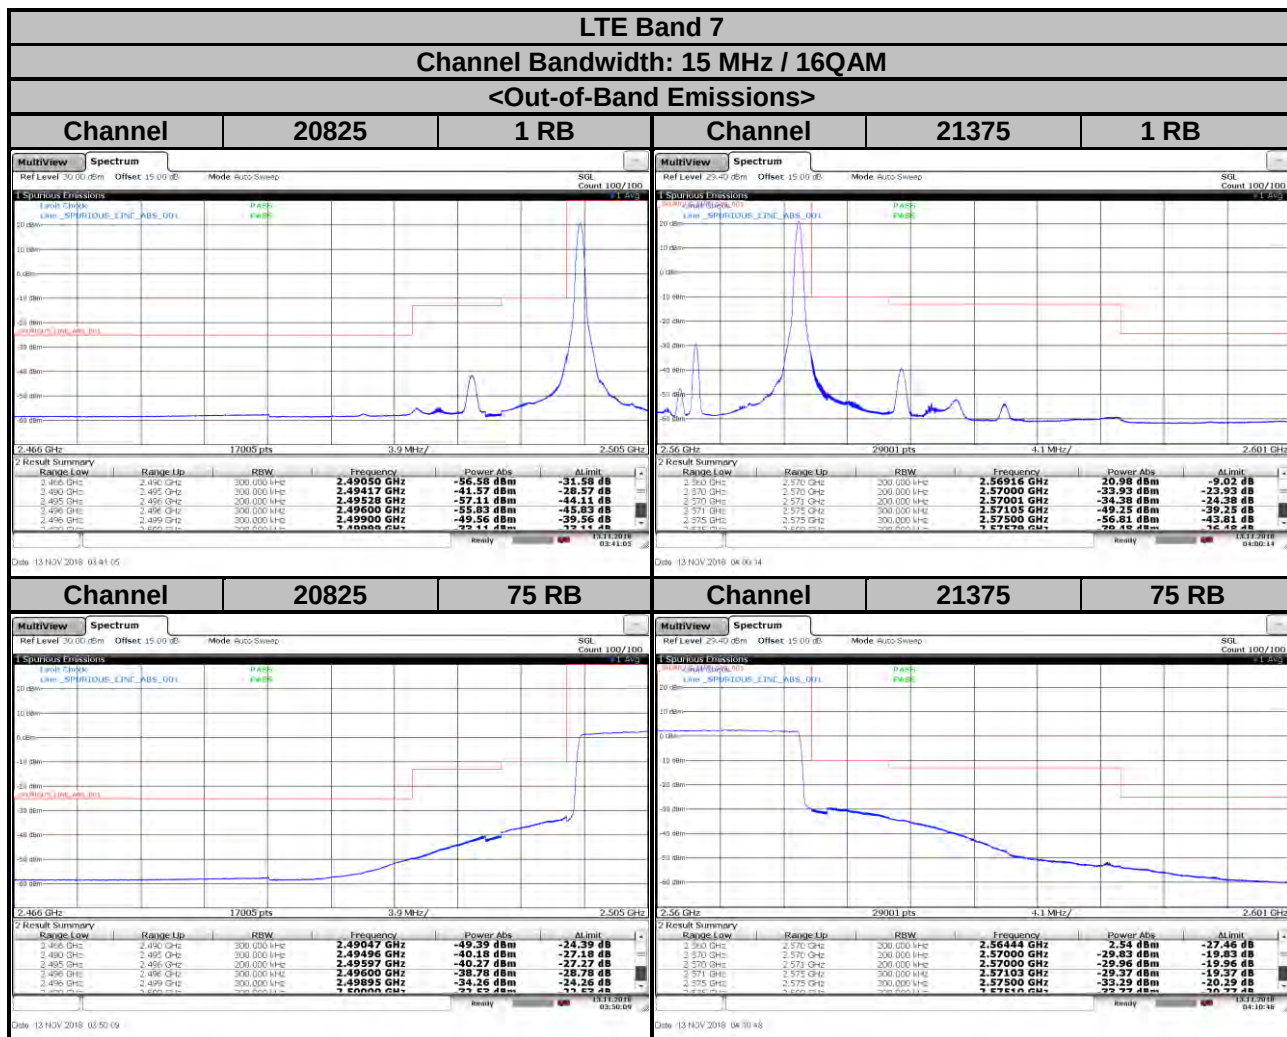


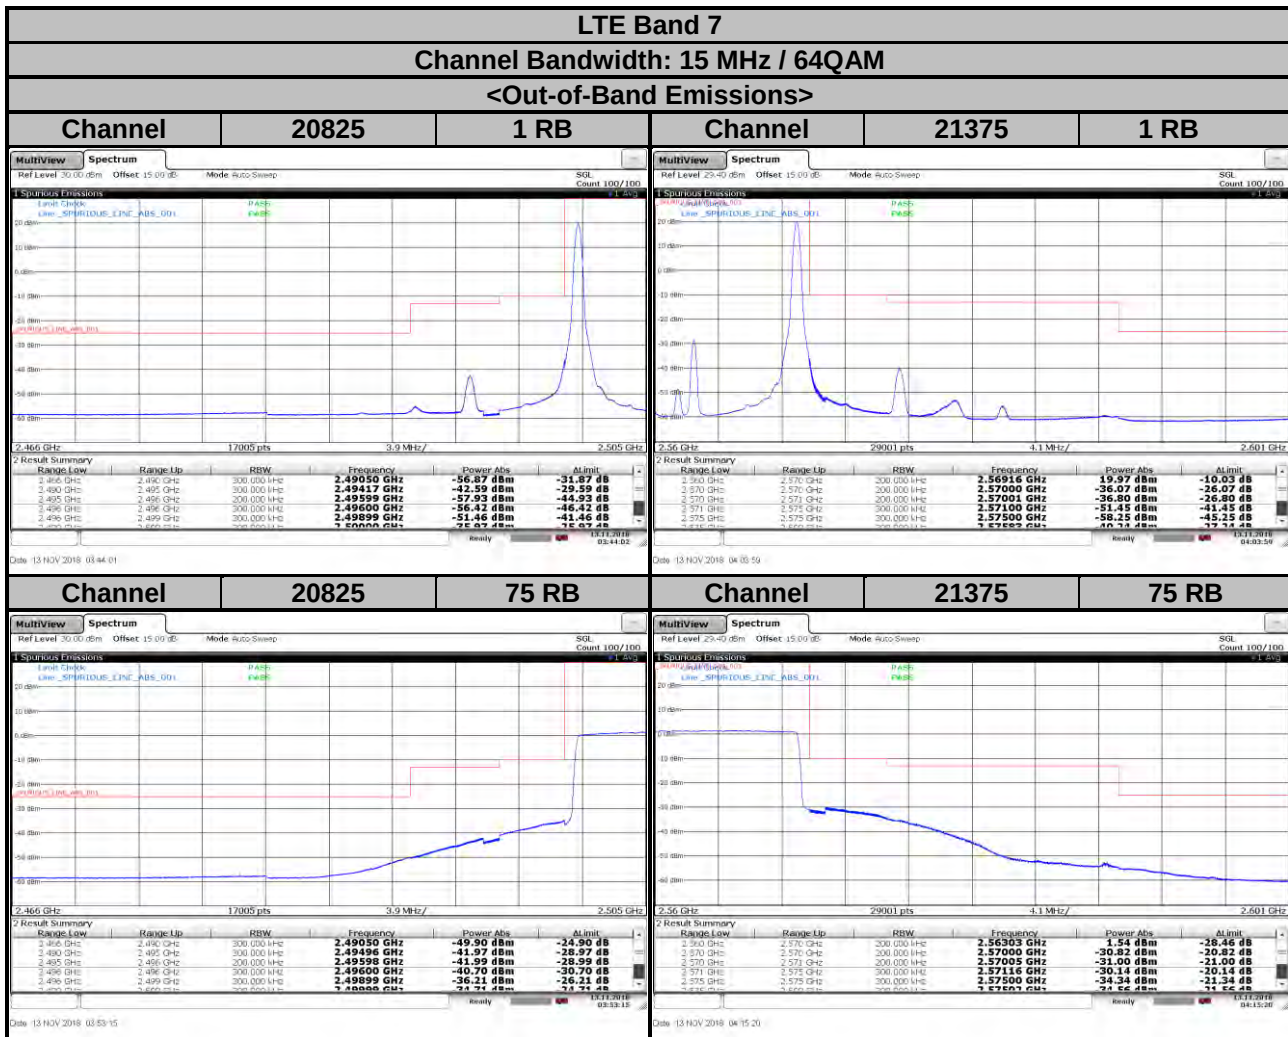

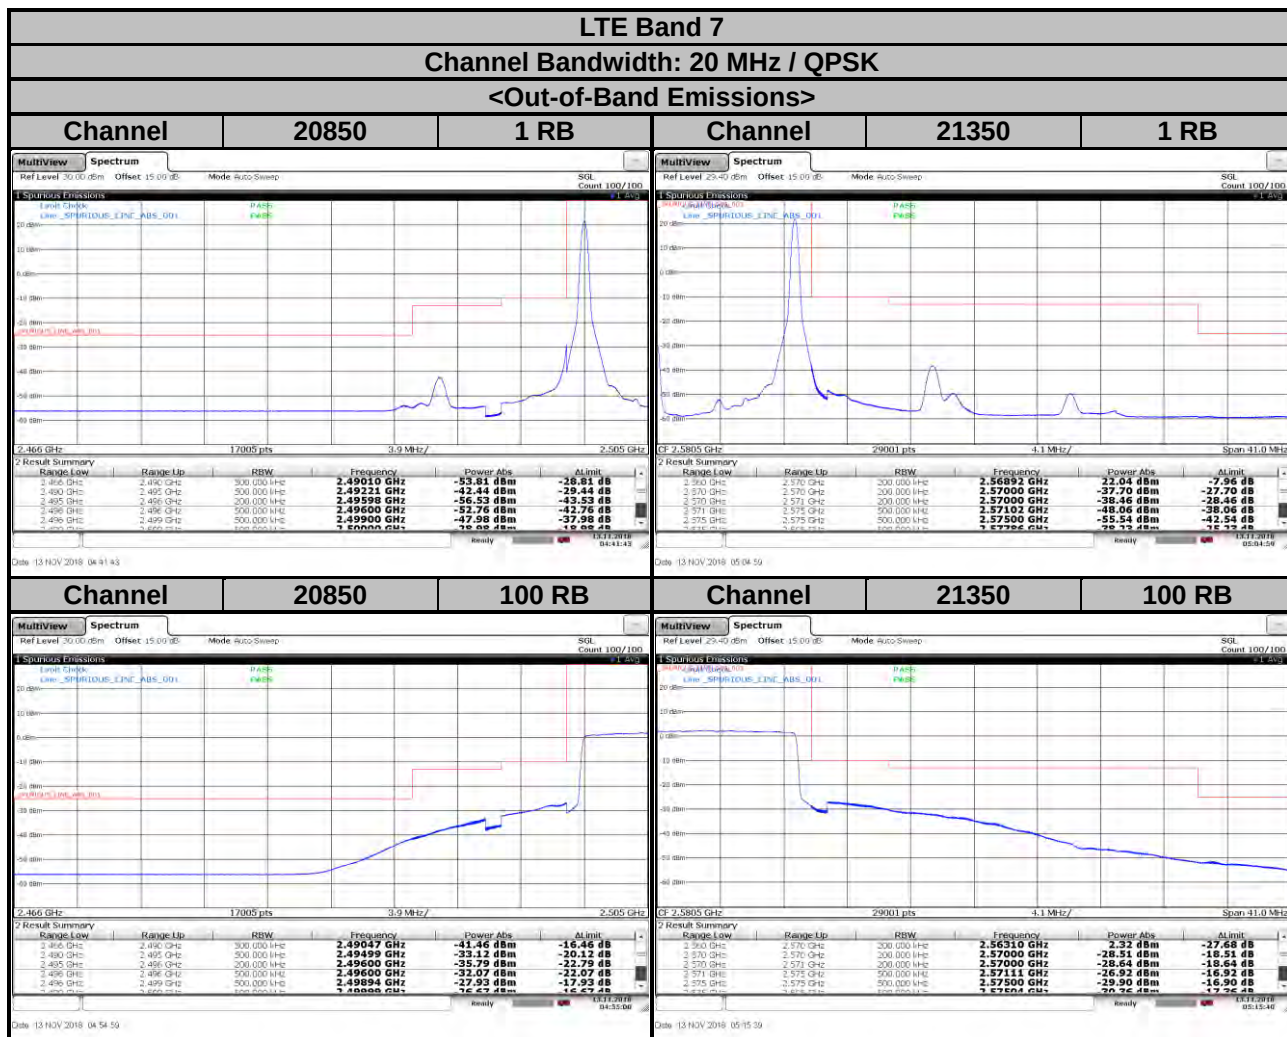



LTE Band 7
Channel Bandwidth: 20 MHz / 16QAM
<Out-of-Band Emissions>

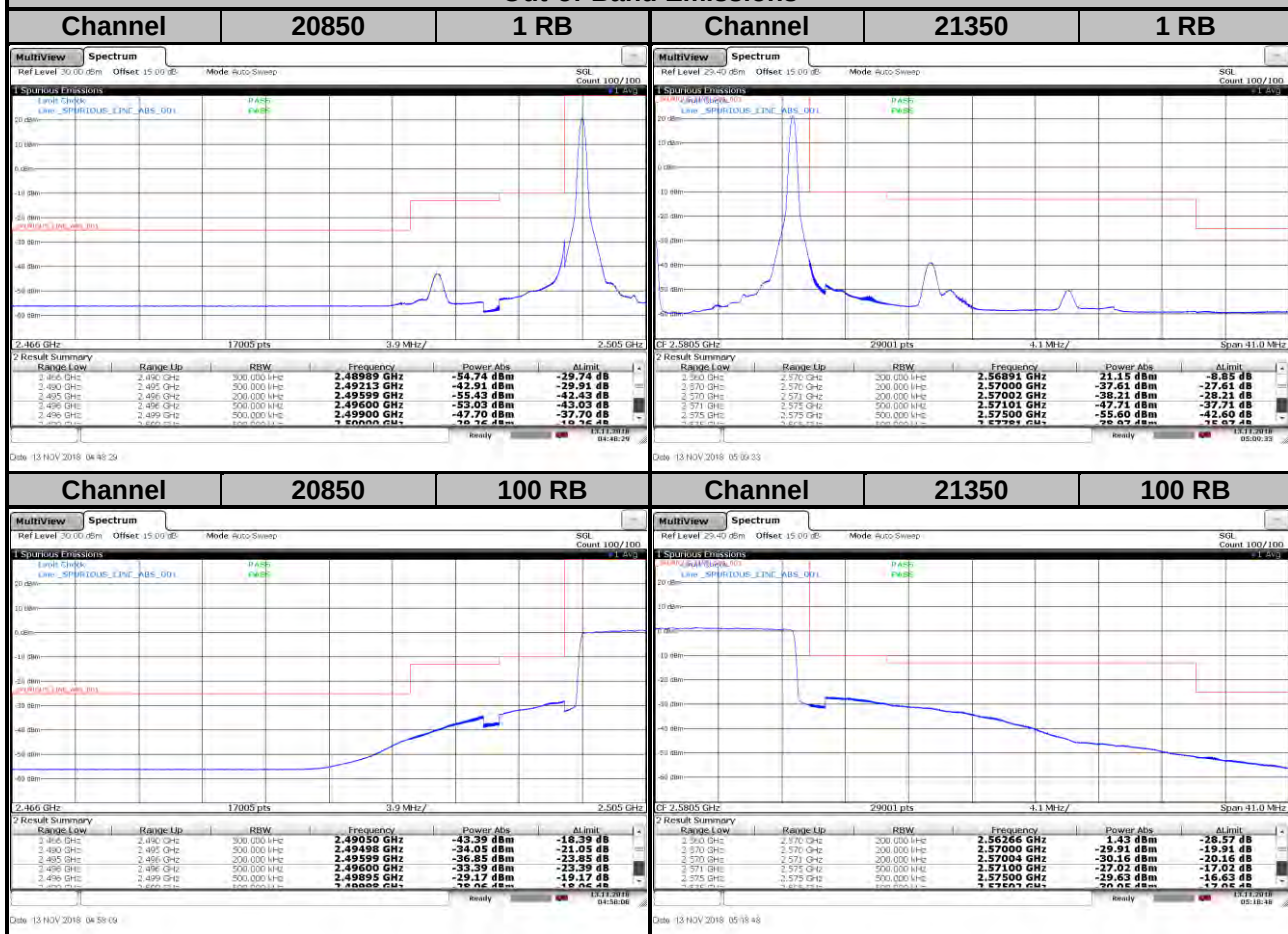

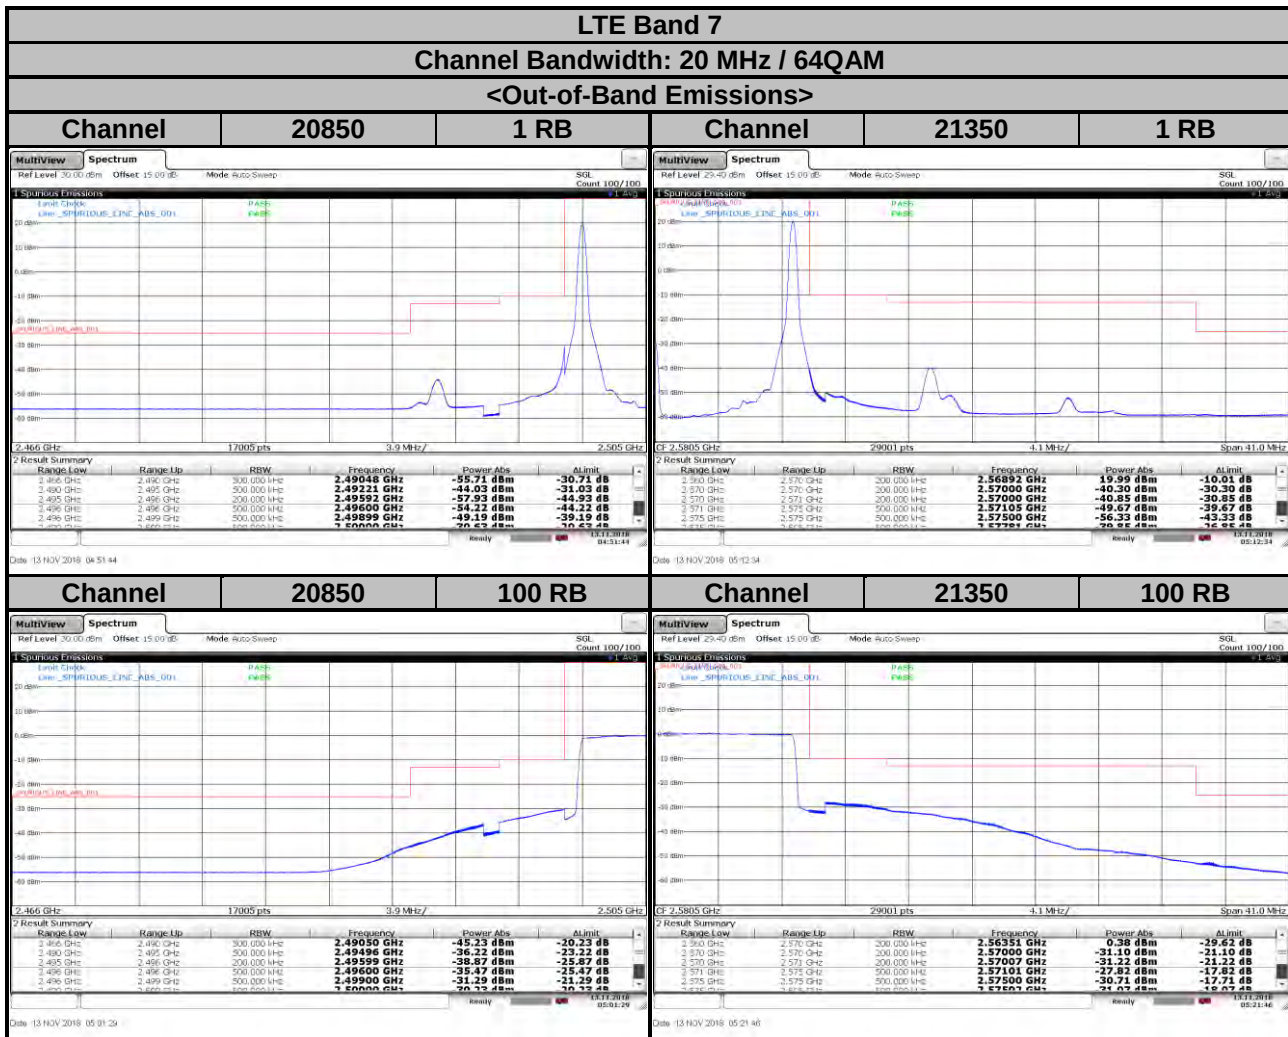



LTE Band 38
Channel Bandwidth: 5 MHz / QPSK
<Out-of-Band Emissions>

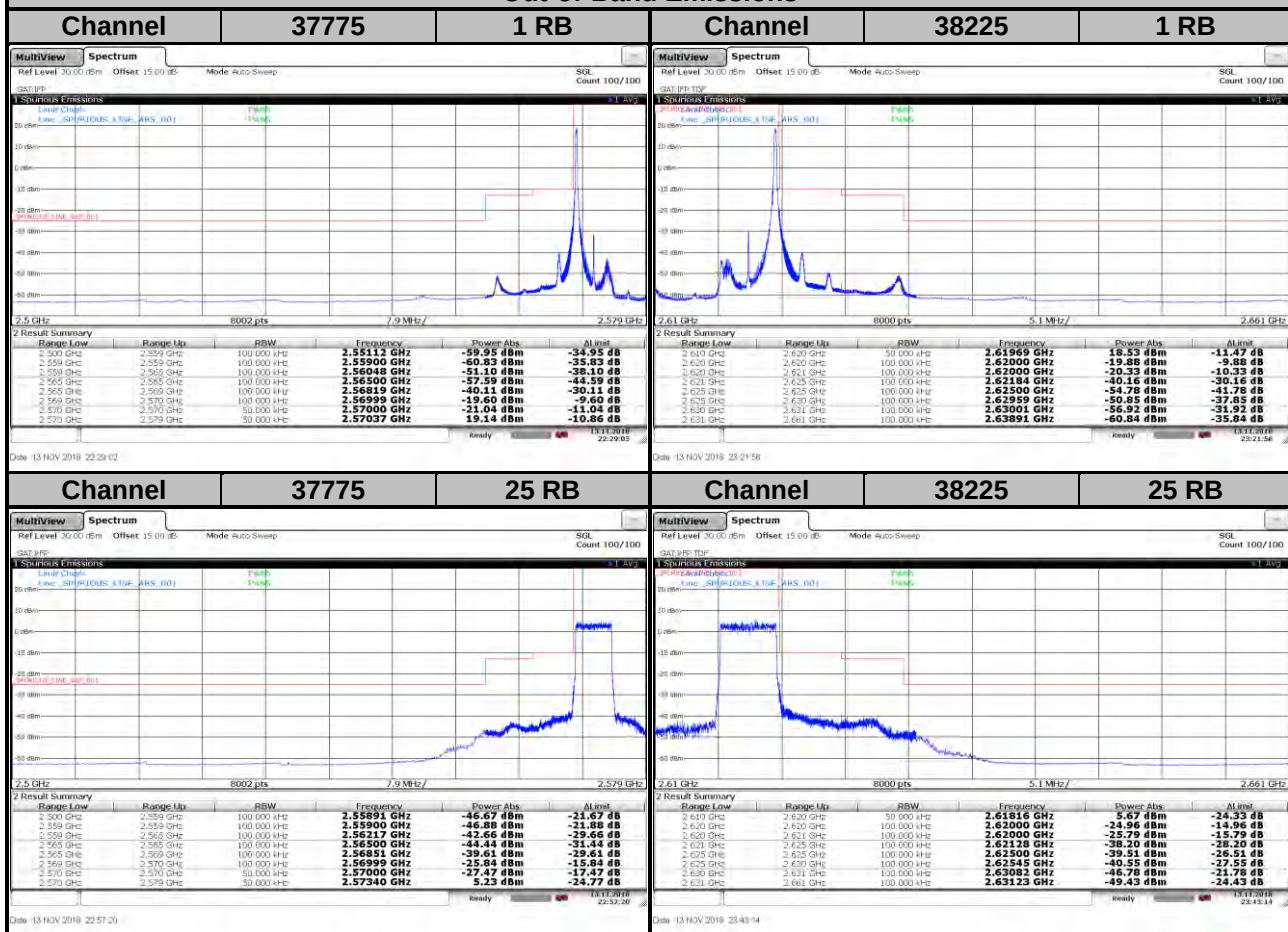

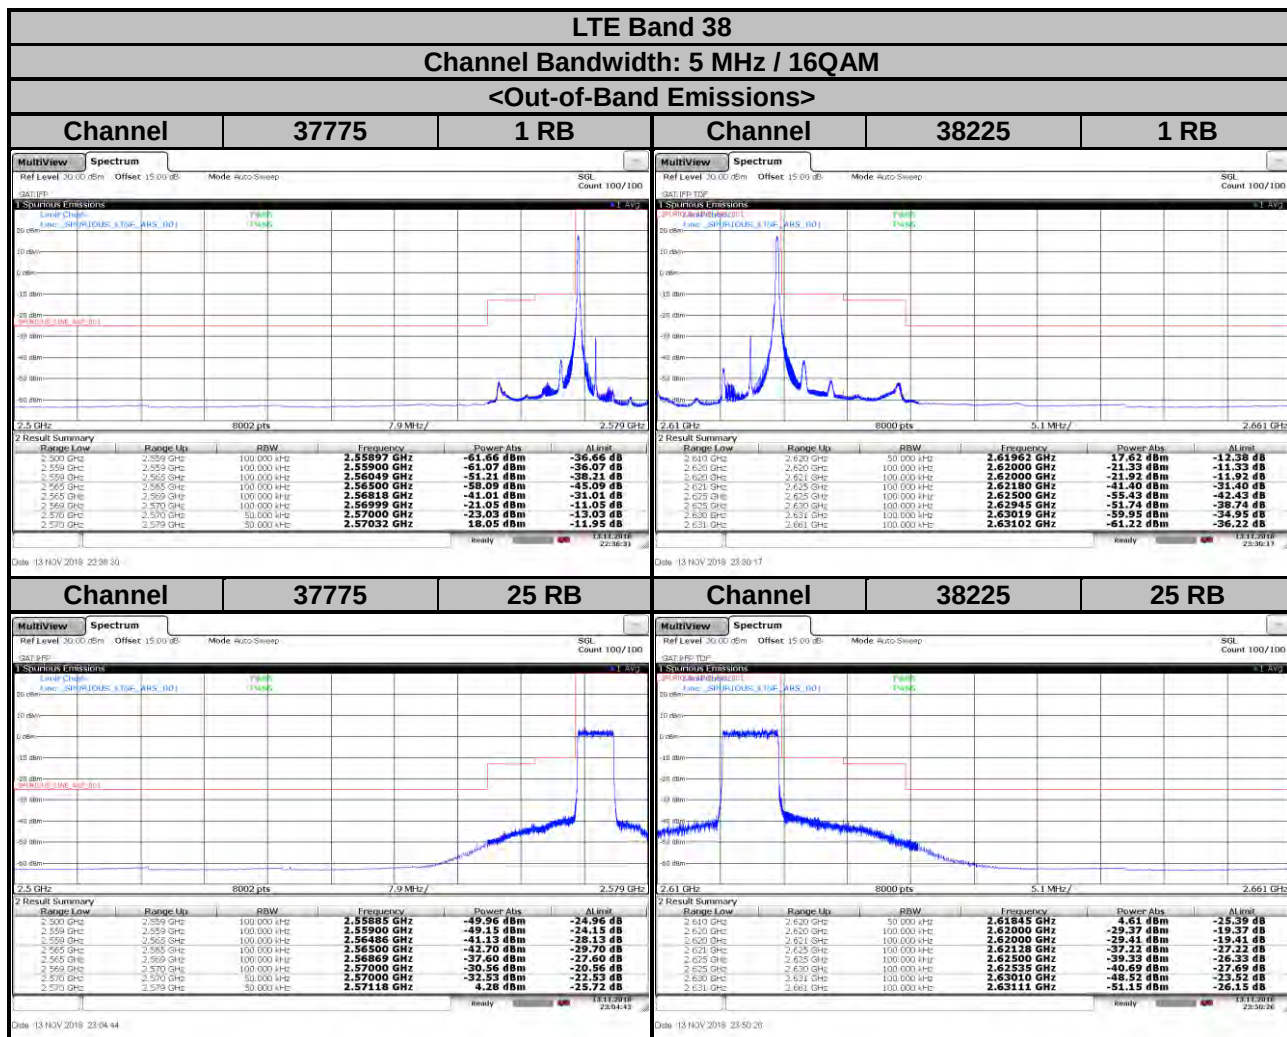


LTE Band 38
Channel Bandwidth: 5 MHz / 64QAM
<Out-of-Band Emissions>

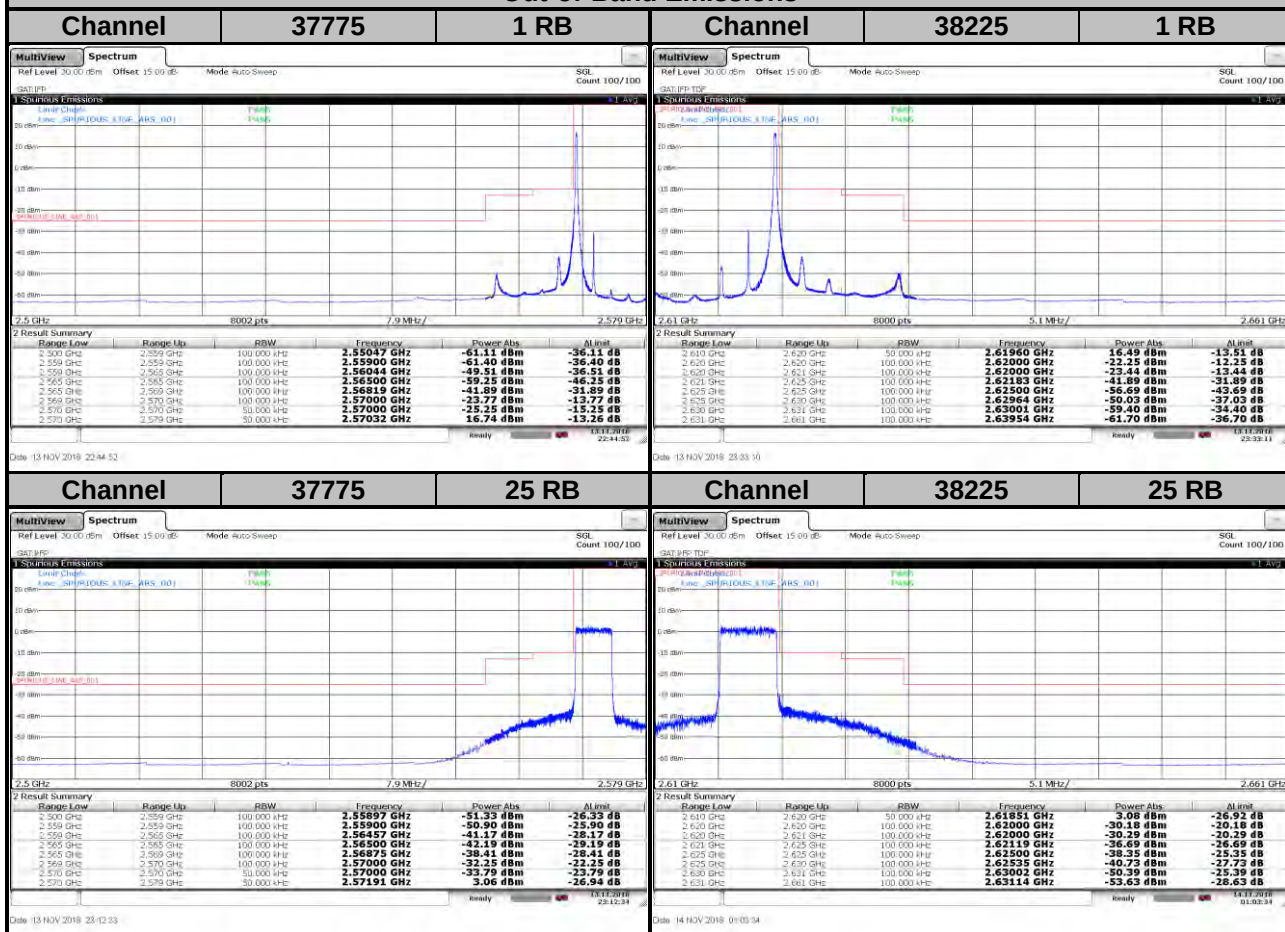

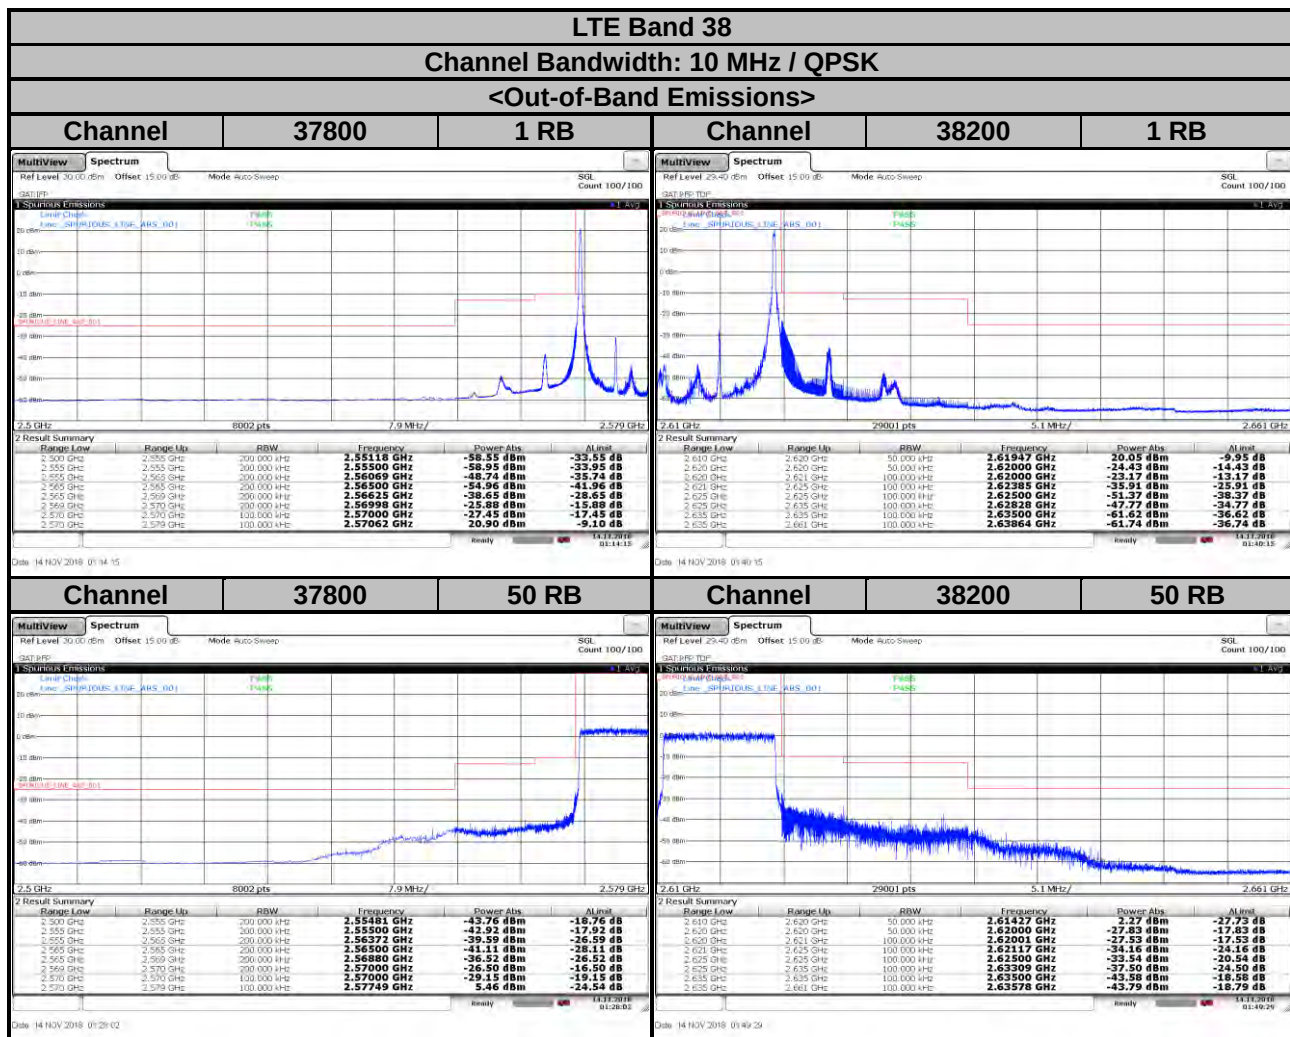


LTE Band 38
Channel Bandwidth: 10 MHz / 16QAM

<Out-of-Band Emissions>

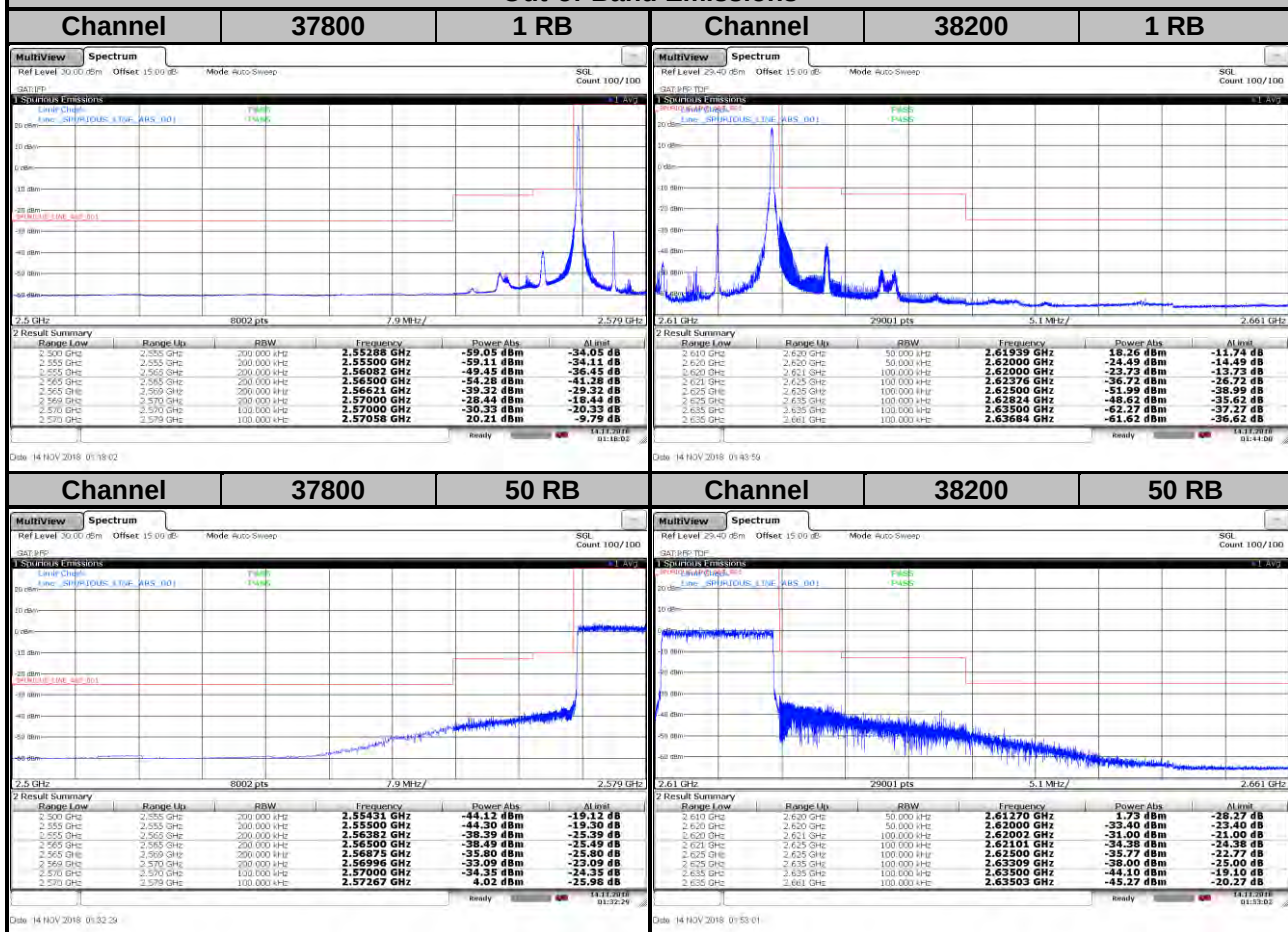


LTE Band 38
Channel Bandwidth: 10 MHz / 64QAM
<Out-of-Band Emissions>

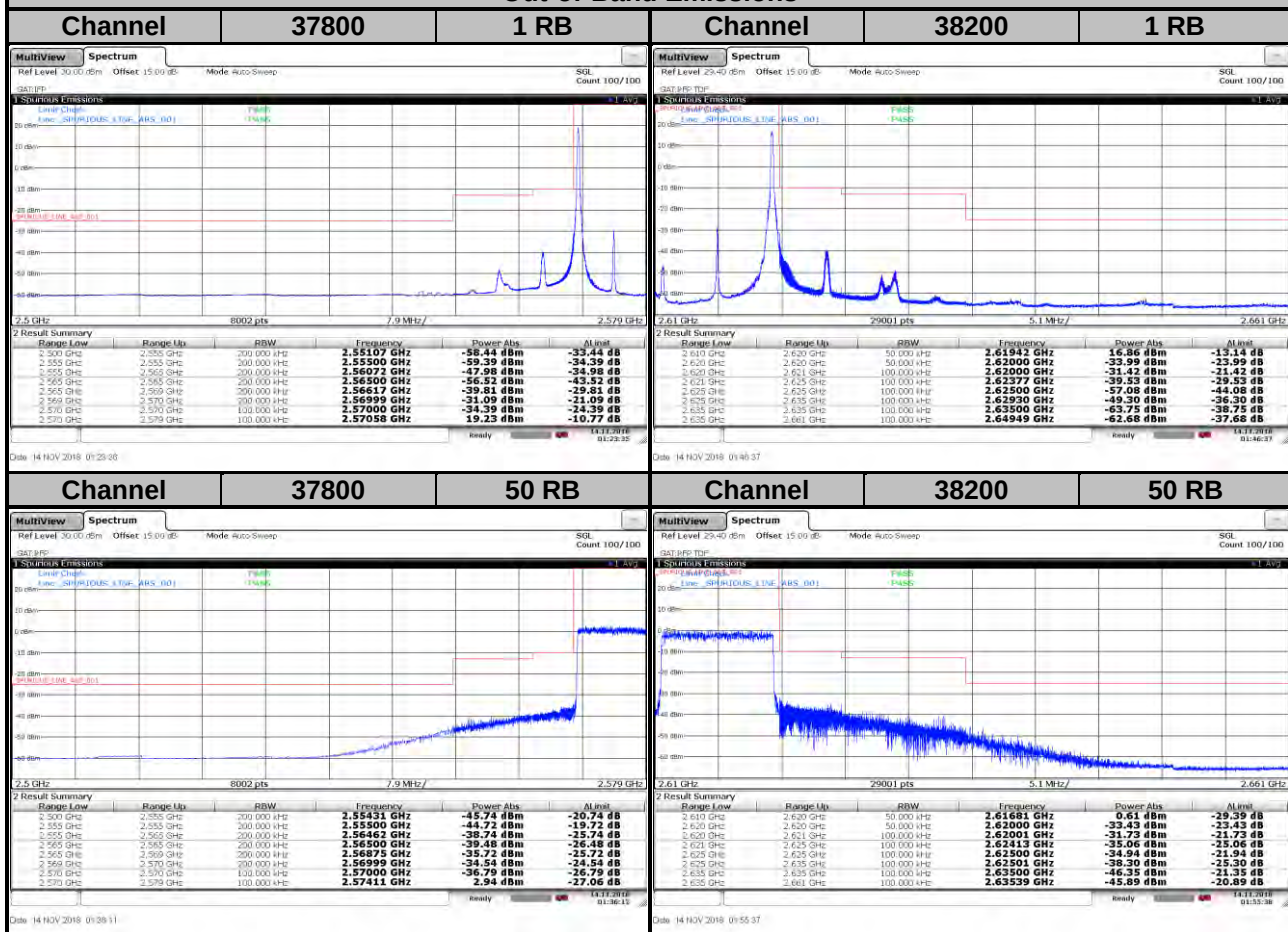

LTE Band 38

Channel Bandwidth: 15 MHz / QPSK


<Out-of-Band Emissions>

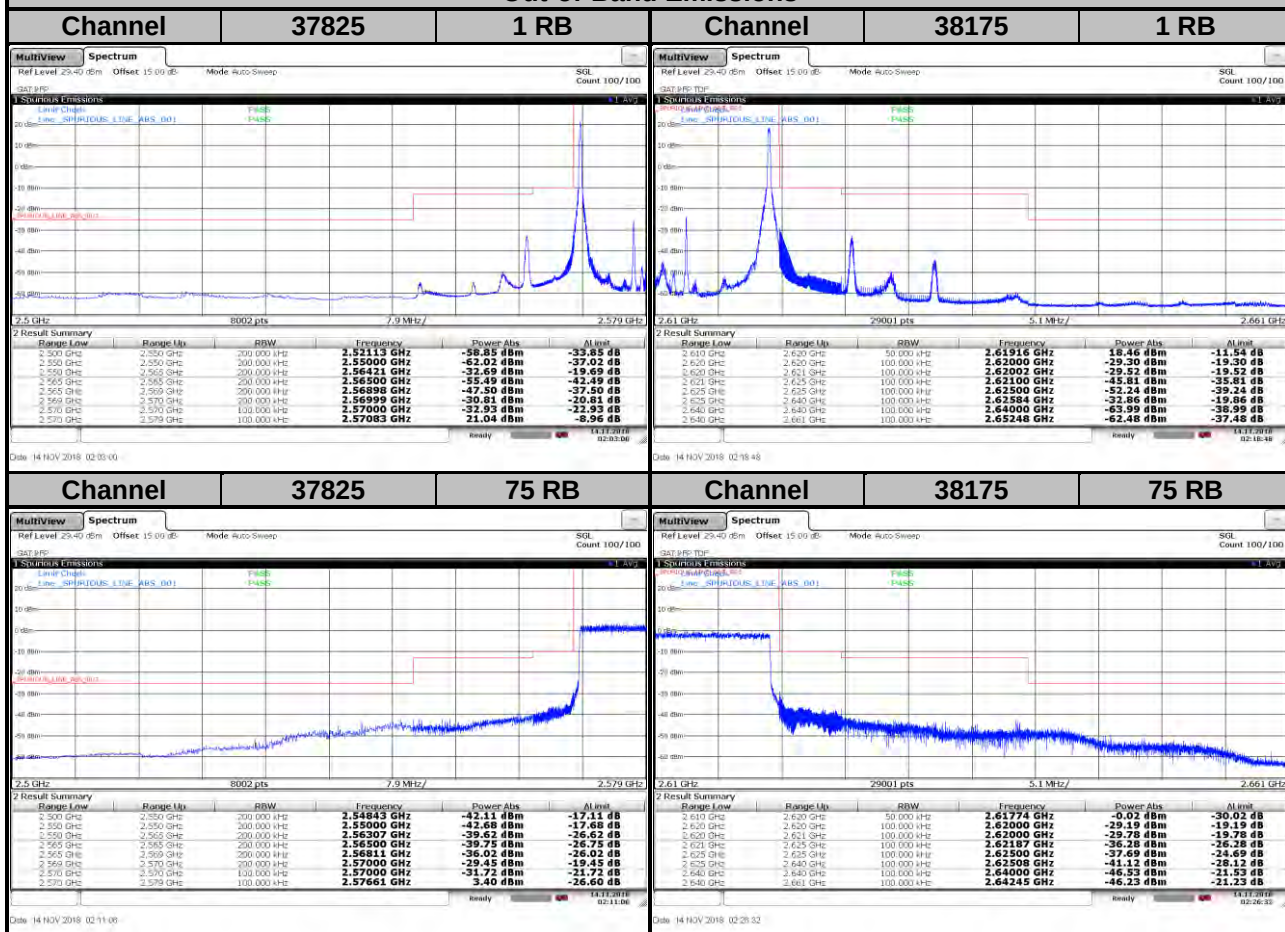

LTE Band 38

Channel Bandwidth: 15 MHz / 16QAM


<Out-of-Band Emissions>

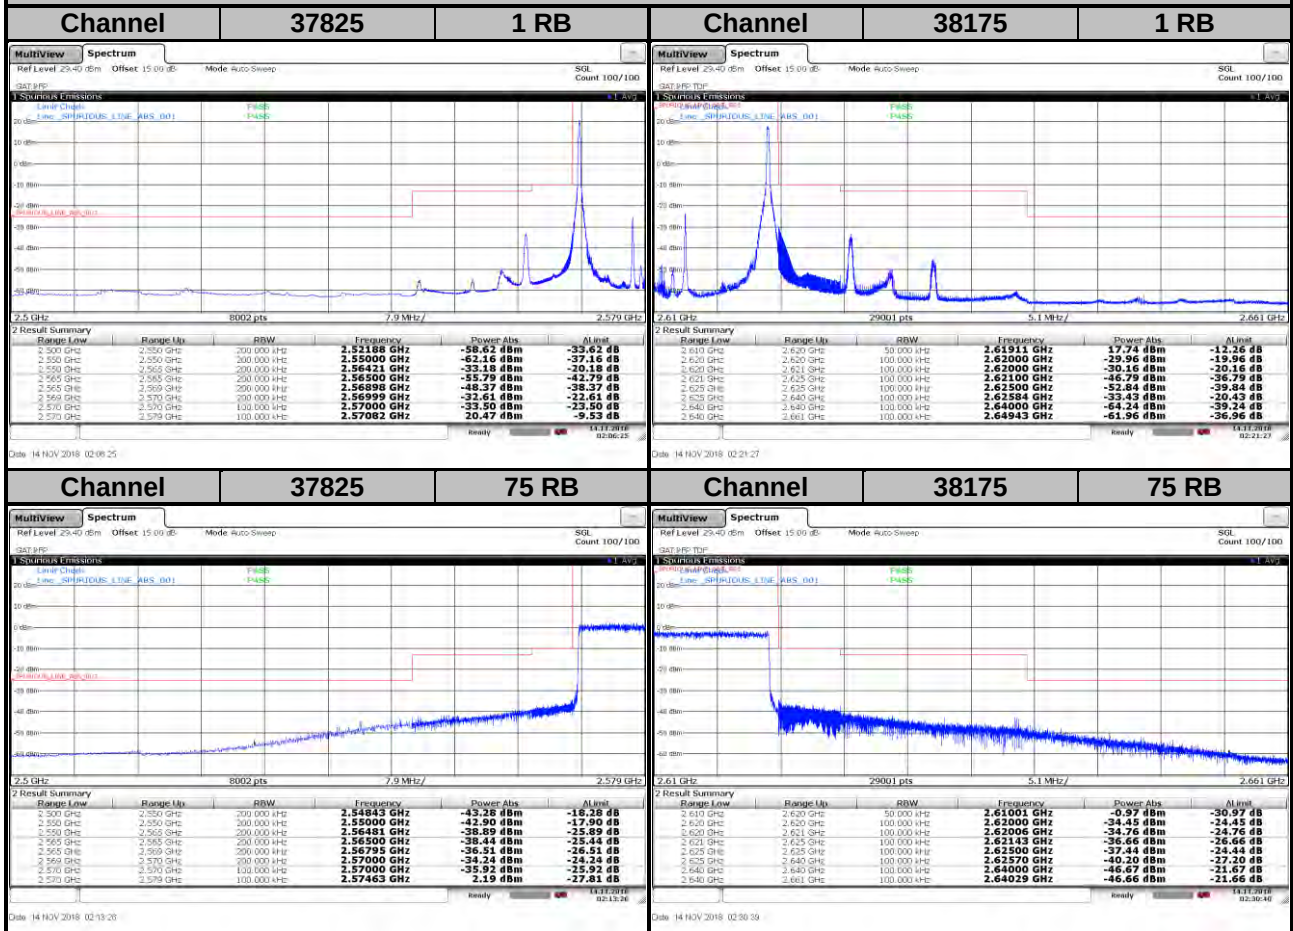

LTE Band 38

Channel Bandwidth: 15 MHz / 64QAM


<Out-of-Band Emissions>

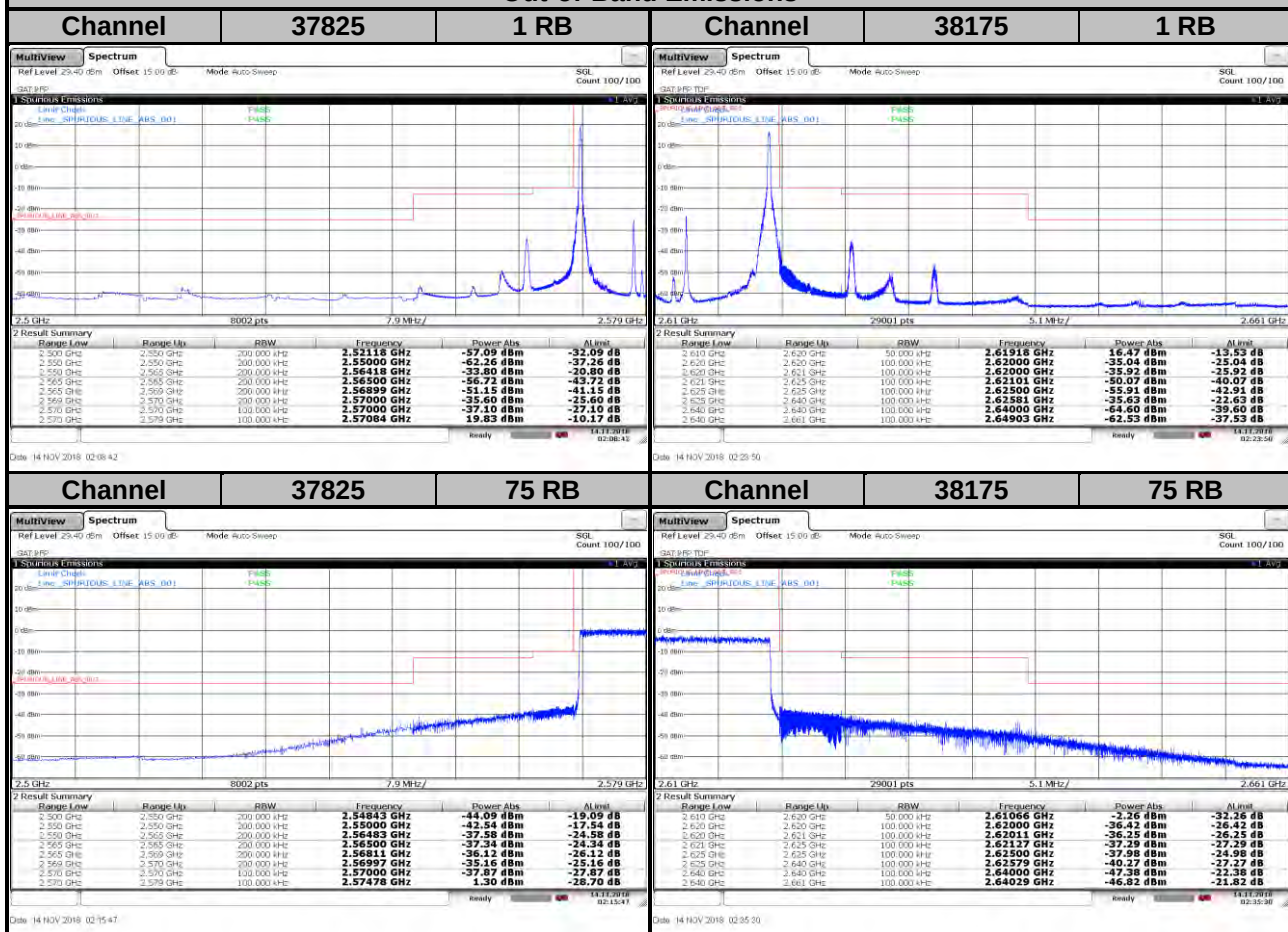

LTE Band 38


Channel Bandwidth: 20 MHz / QPSK

<Out-of-Band Emissions>

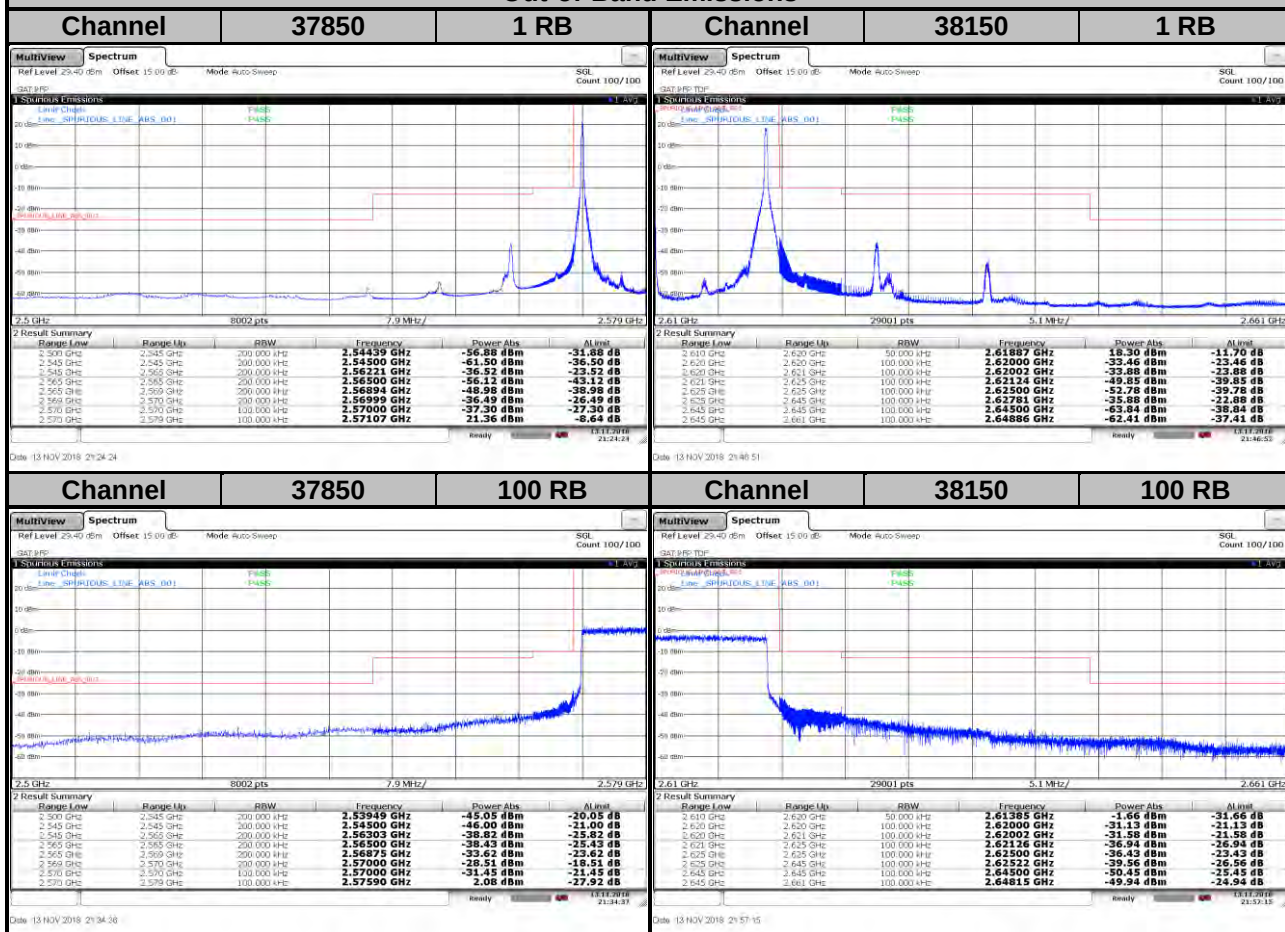


LTE Band 38
Channel Bandwidth: 20 MHz / 16QAM

<Out-of-Band Emissions>

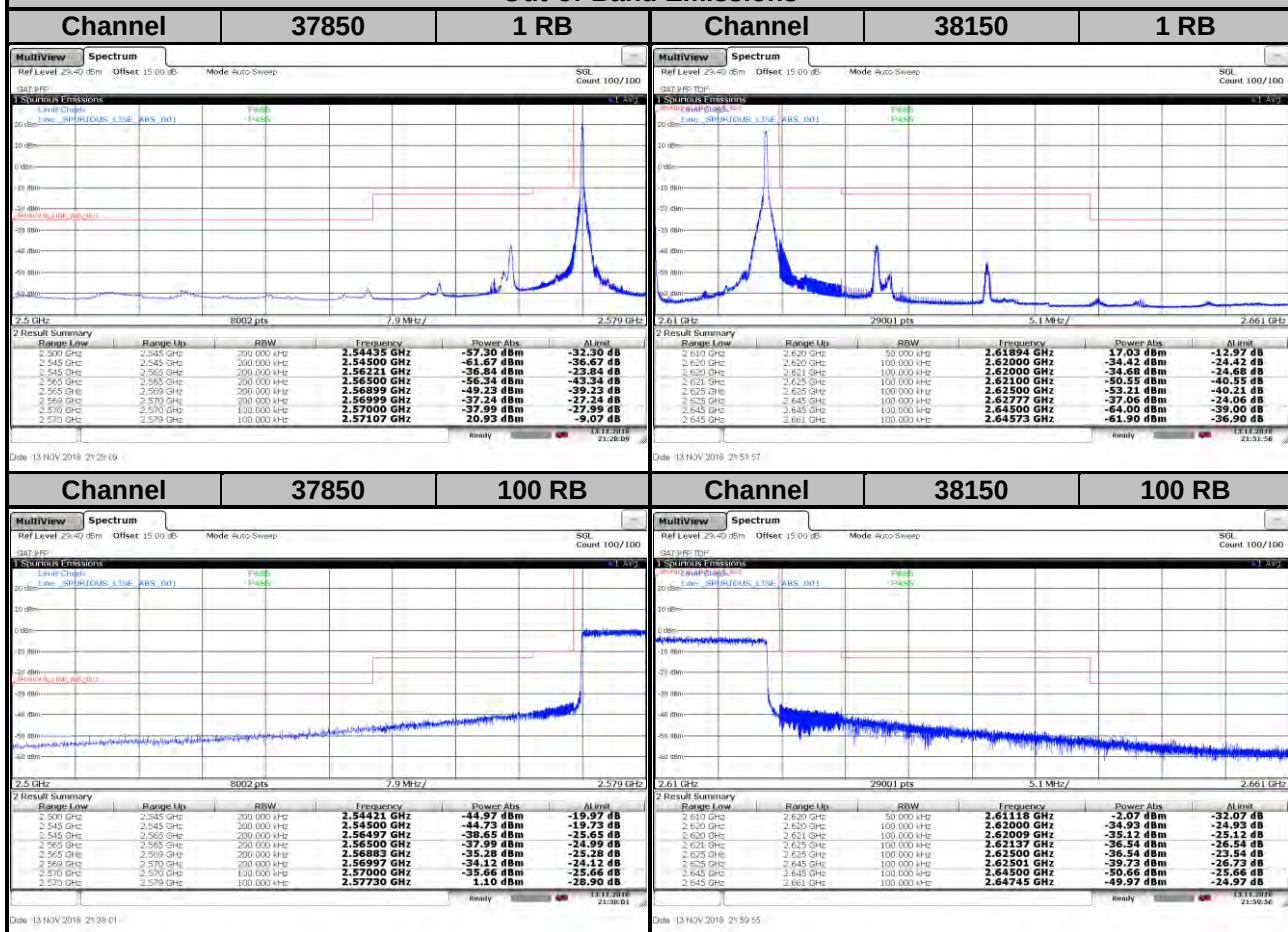


LTE Band 38
Channel Bandwidth: 20 MHz / 64QAM

<Out-of-Band Emissions>

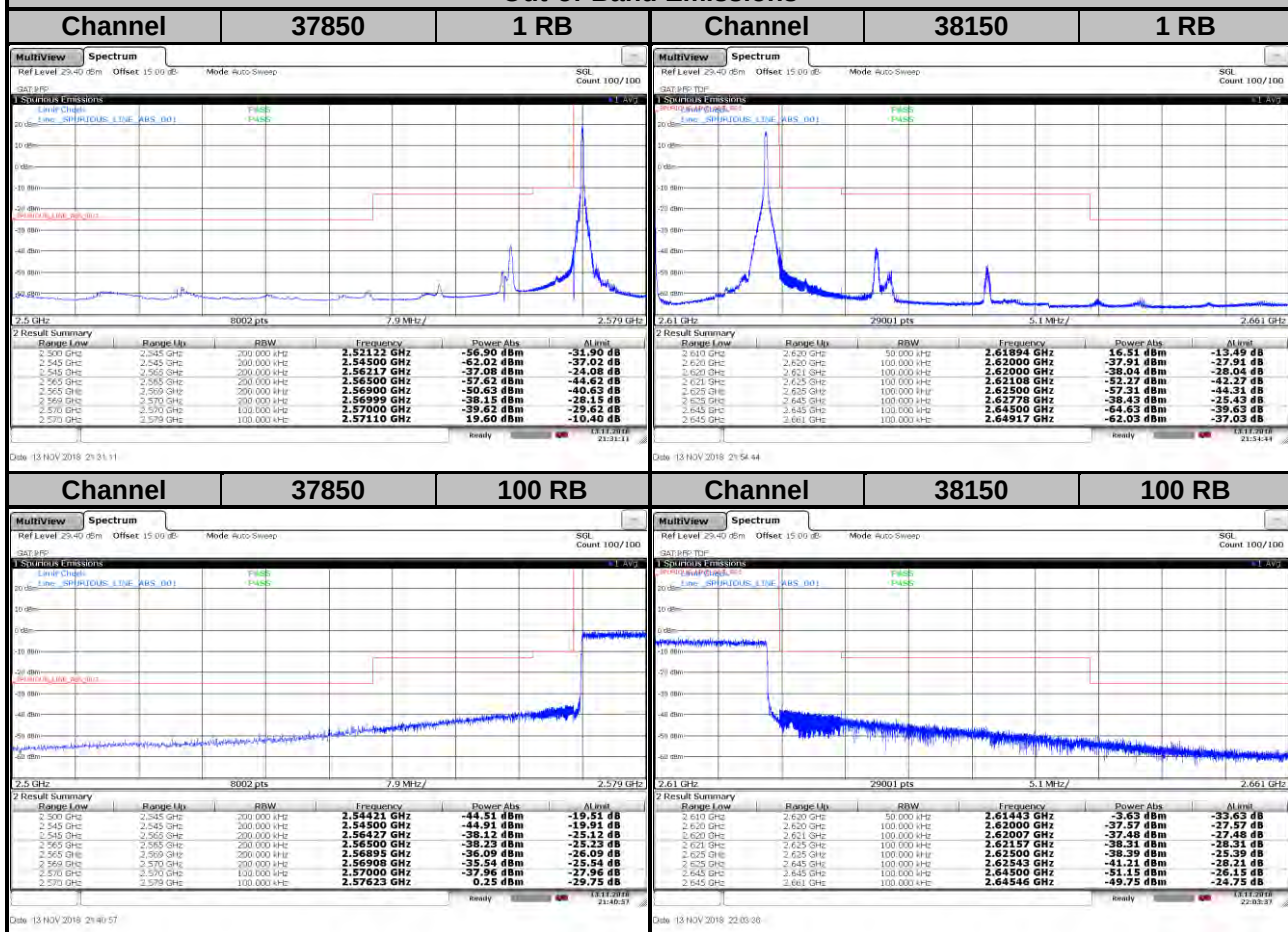


LTE Band 41
Channel Bandwidth: 5 MHz / QPSK
<Out-of-Band Emissions>

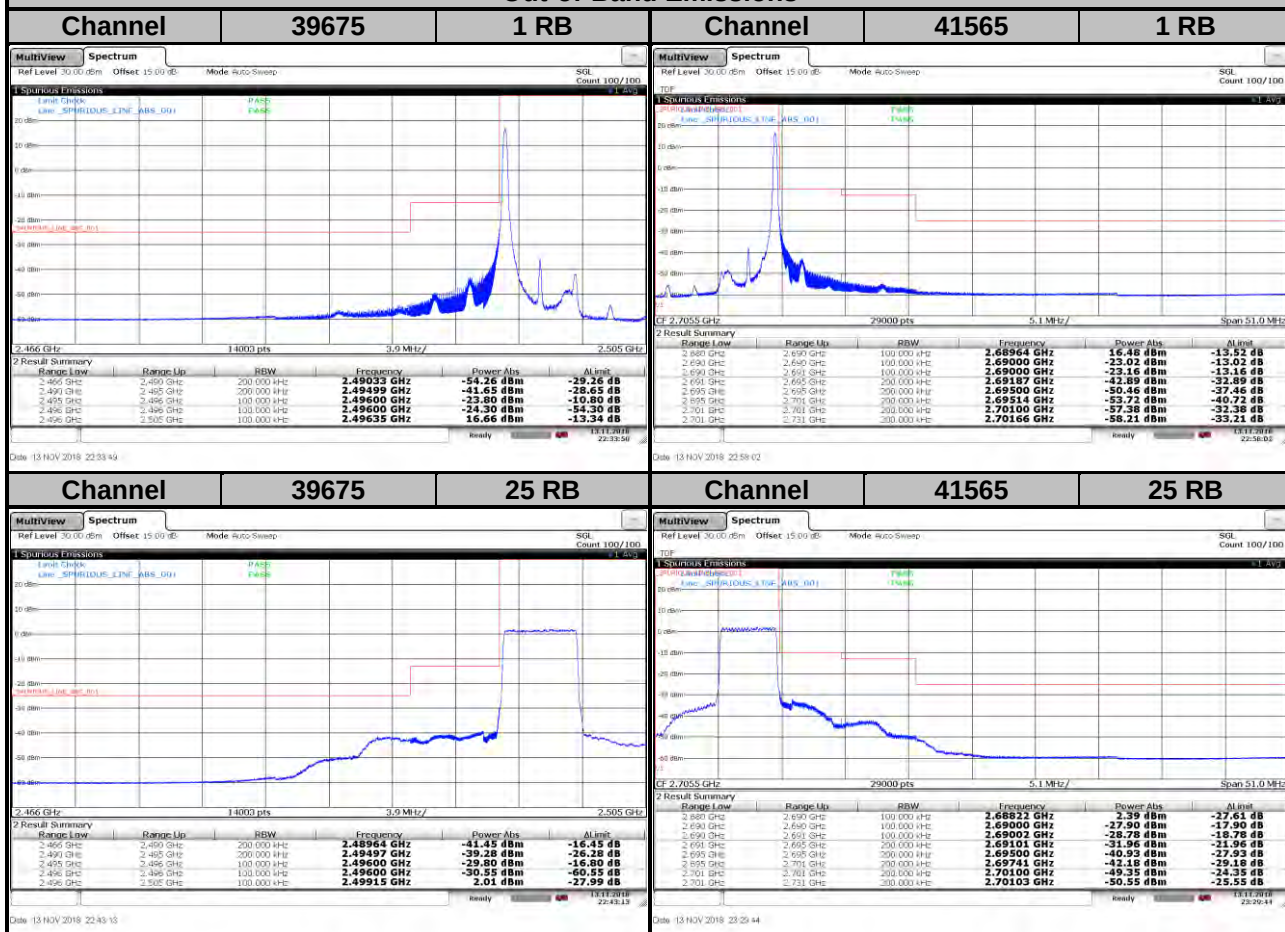


LTE Band 41
Channel Bandwidth: 5 MHz / 16QAM

<Out-of-Band Emissions>

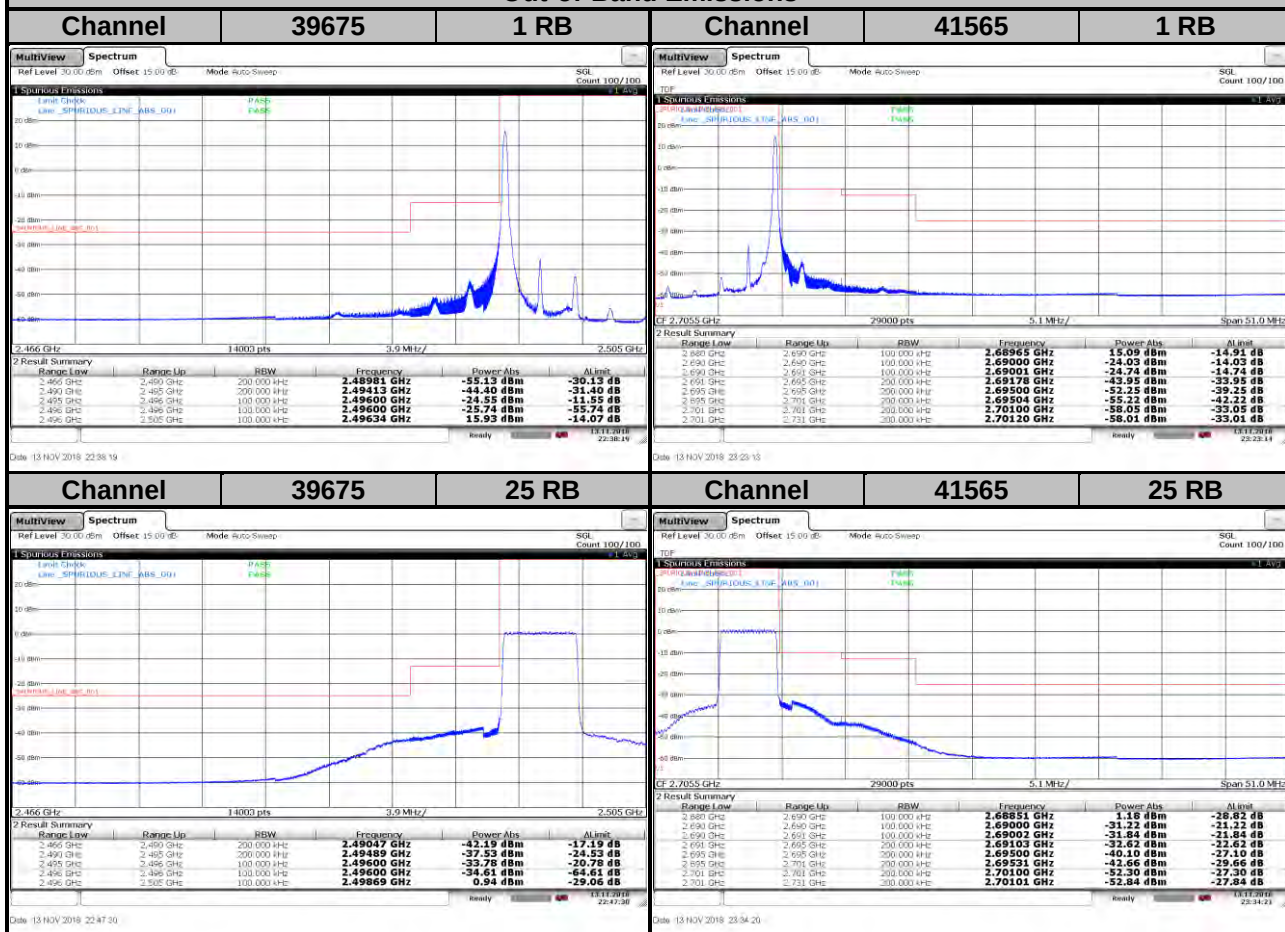

LTE Band 41
Channel Bandwidth: 5 MHz / 64QAM


<Out-of-Band Emissions>

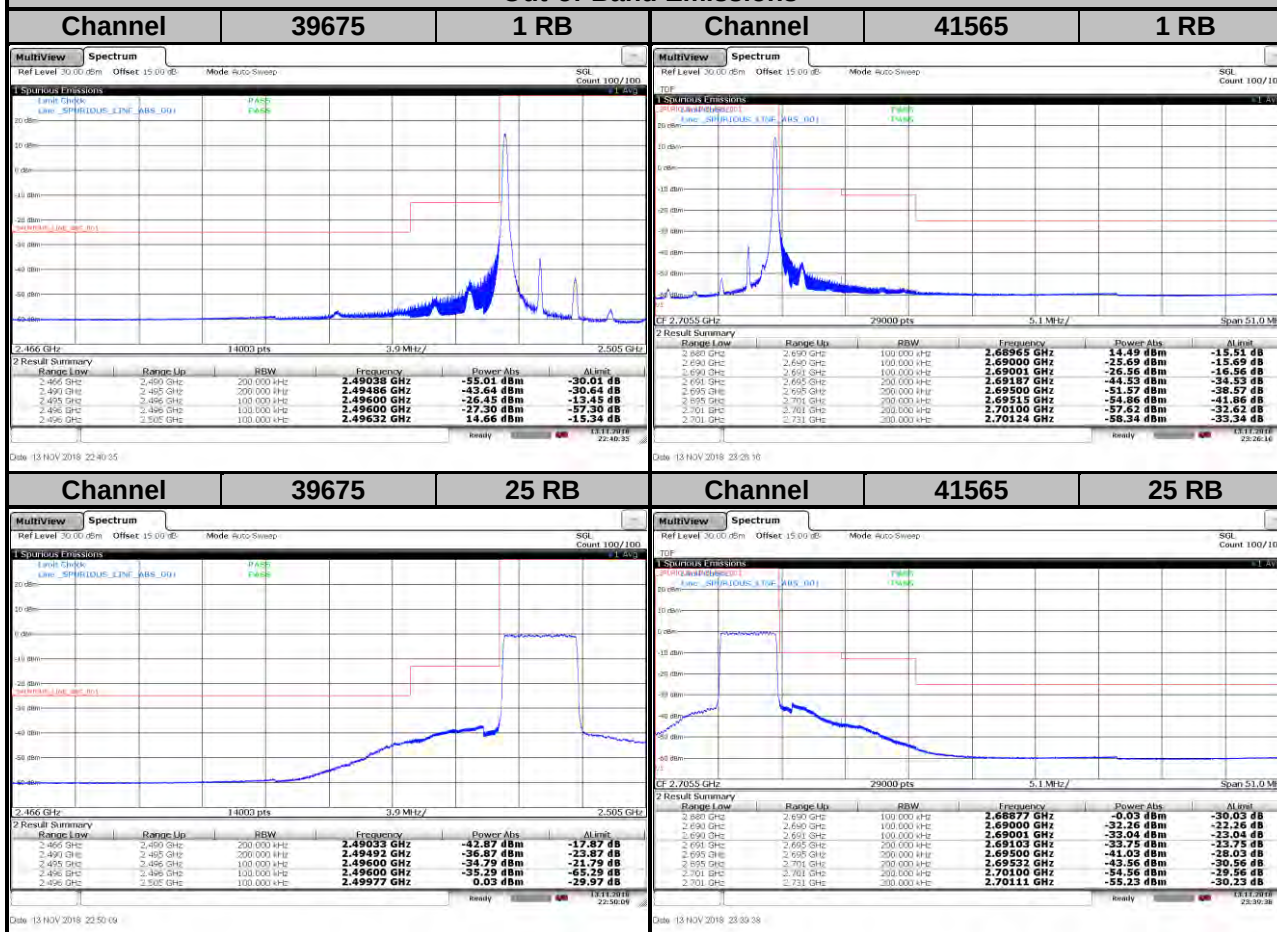

LTE Band 41

Channel Bandwidth: 10 MHz / QPSK


<Out-of-Band Emissions>

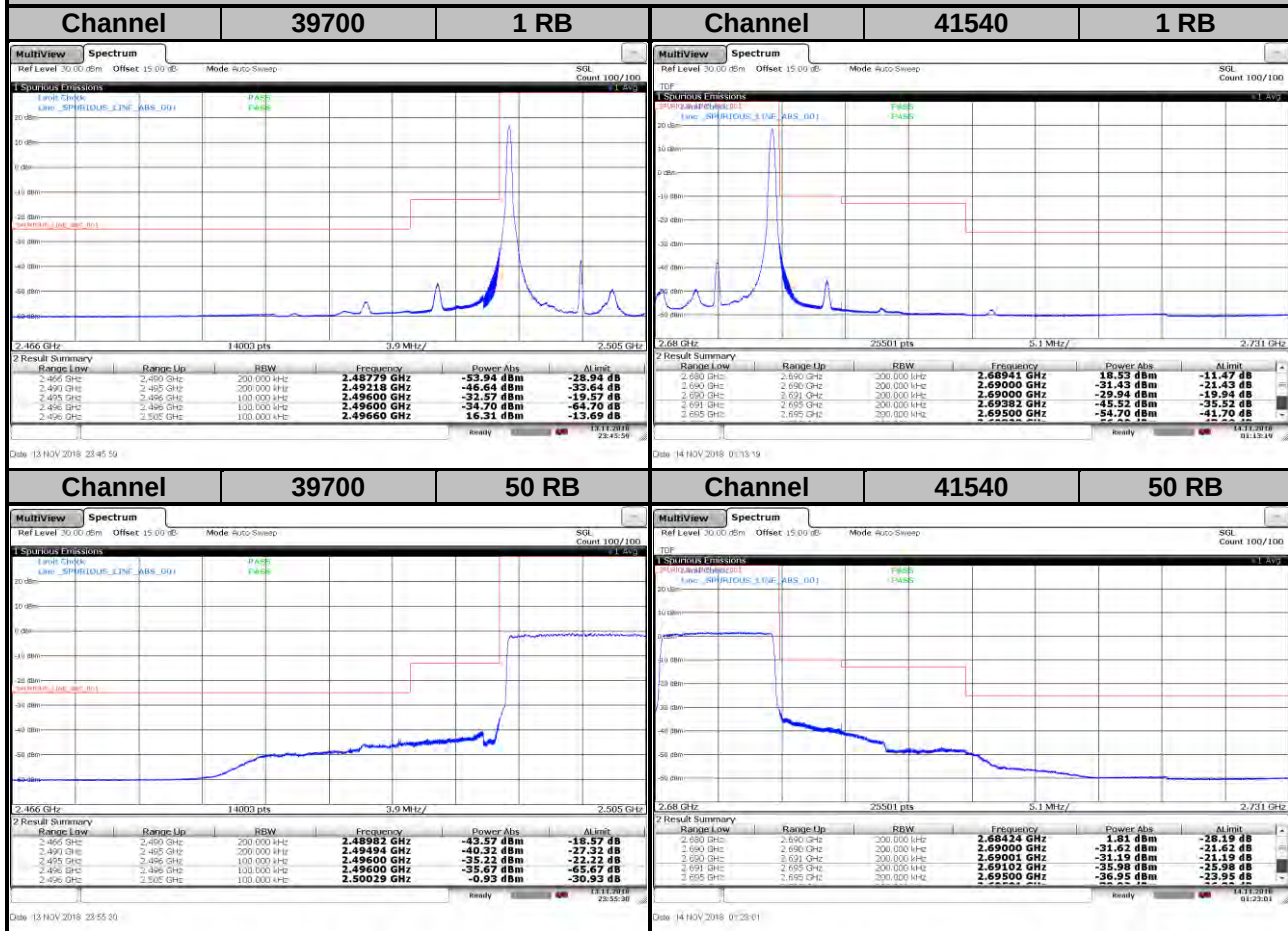

LTE Band 41

Channel Bandwidth: 10 MHz / 16QAM


<Out-of-Band Emissions>

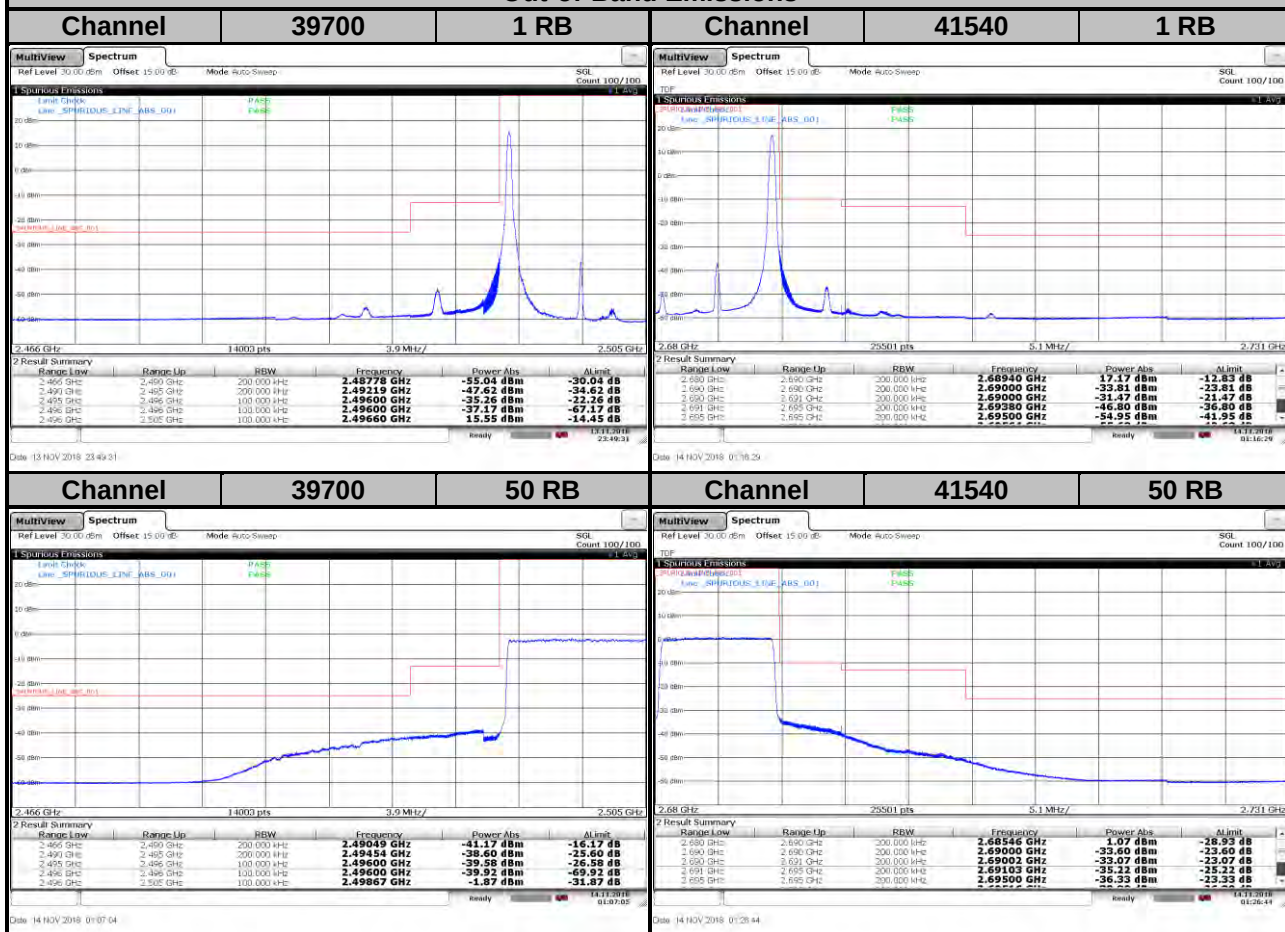


LTE Band 41

Channel Bandwidth: 10 MHz / 64QAM

<Out-of-Band Emissions>

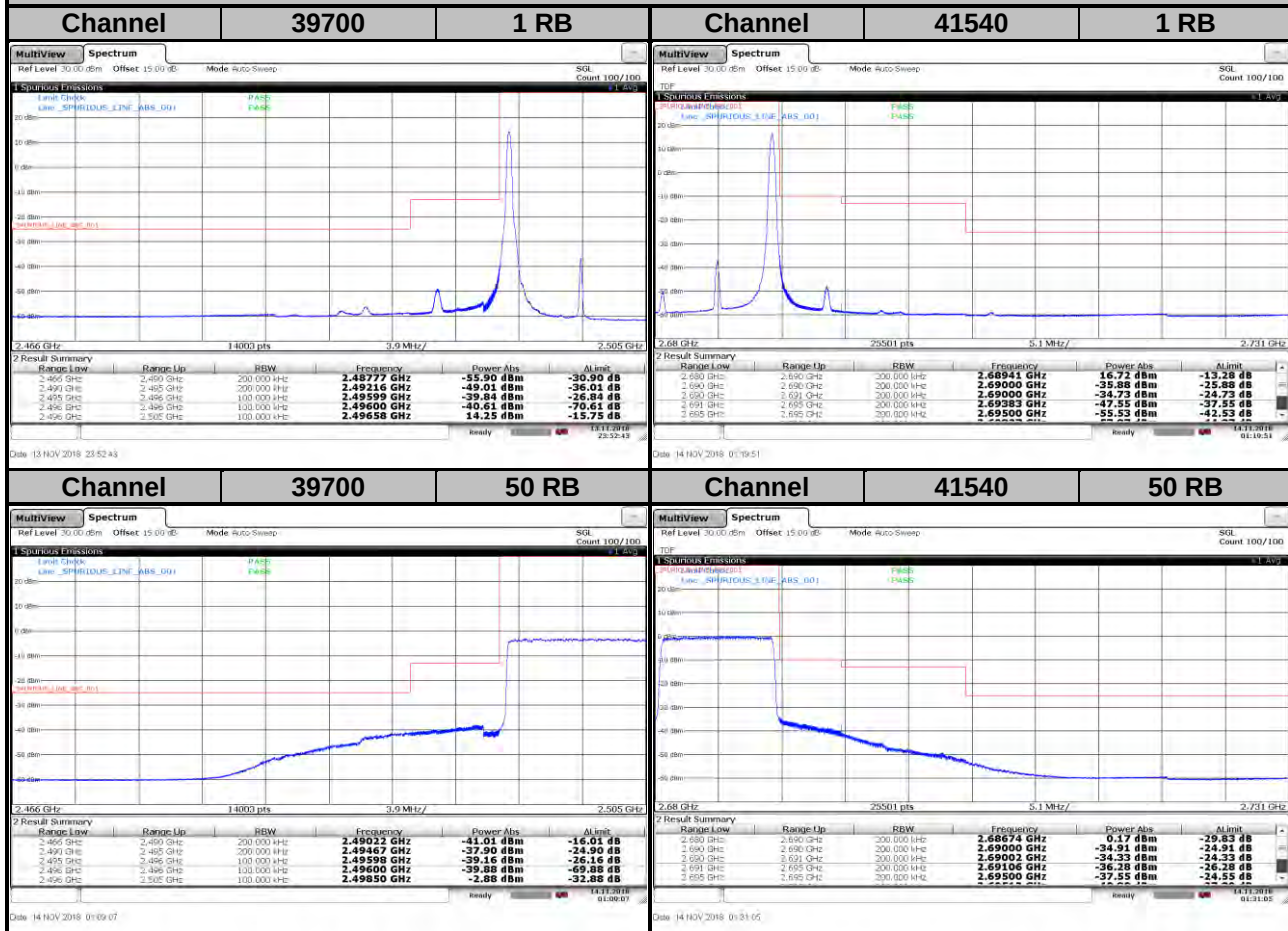


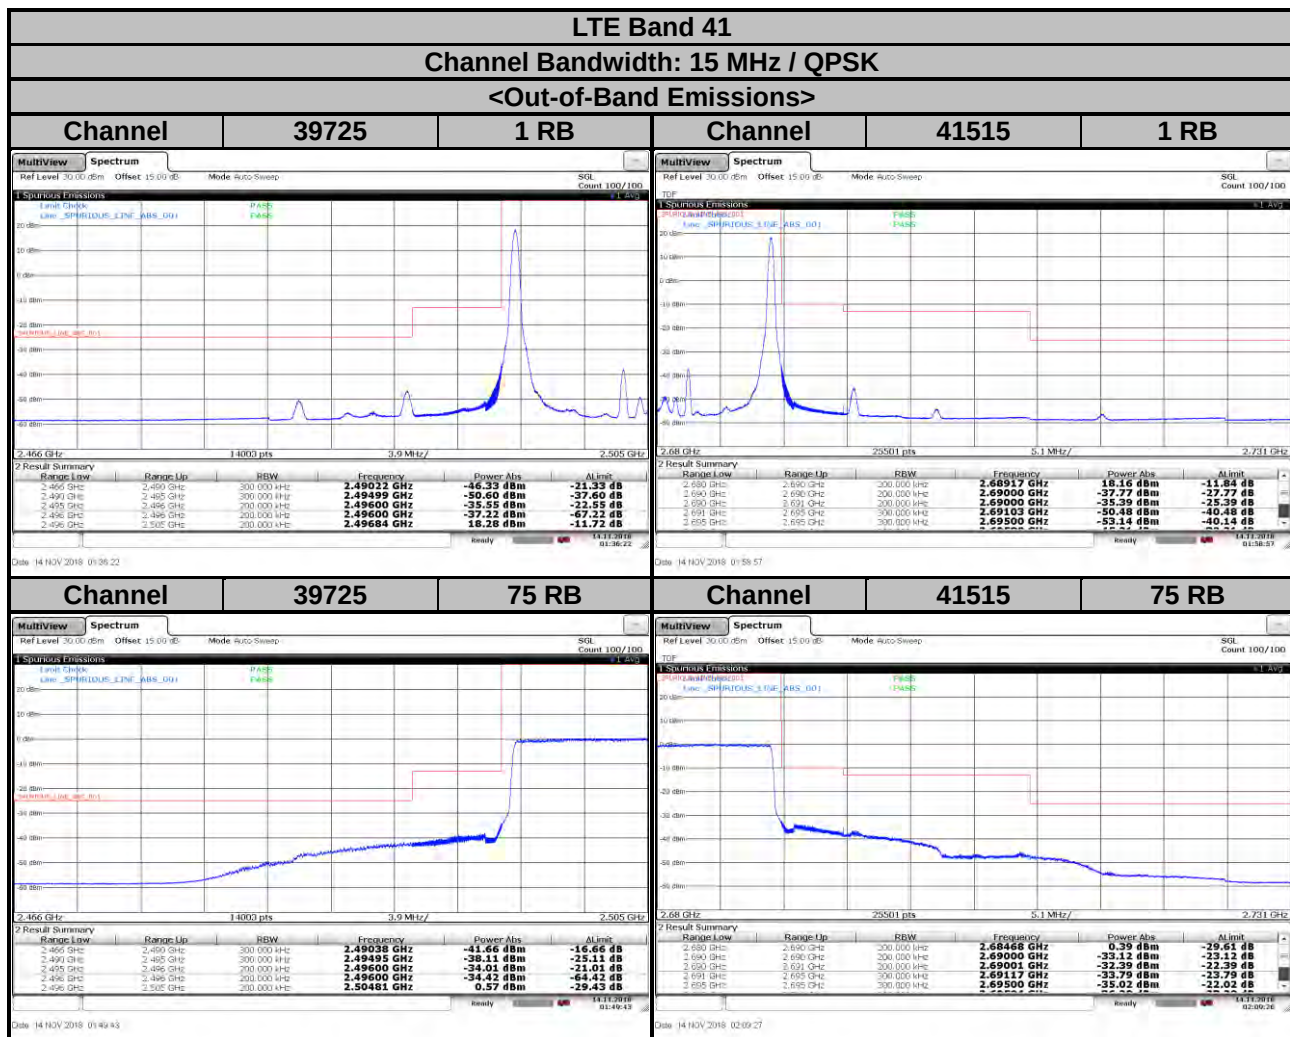

LTE Band 41


Channel Bandwidth: 15 MHz / 16QAM

<Out-of-Band Emissions>

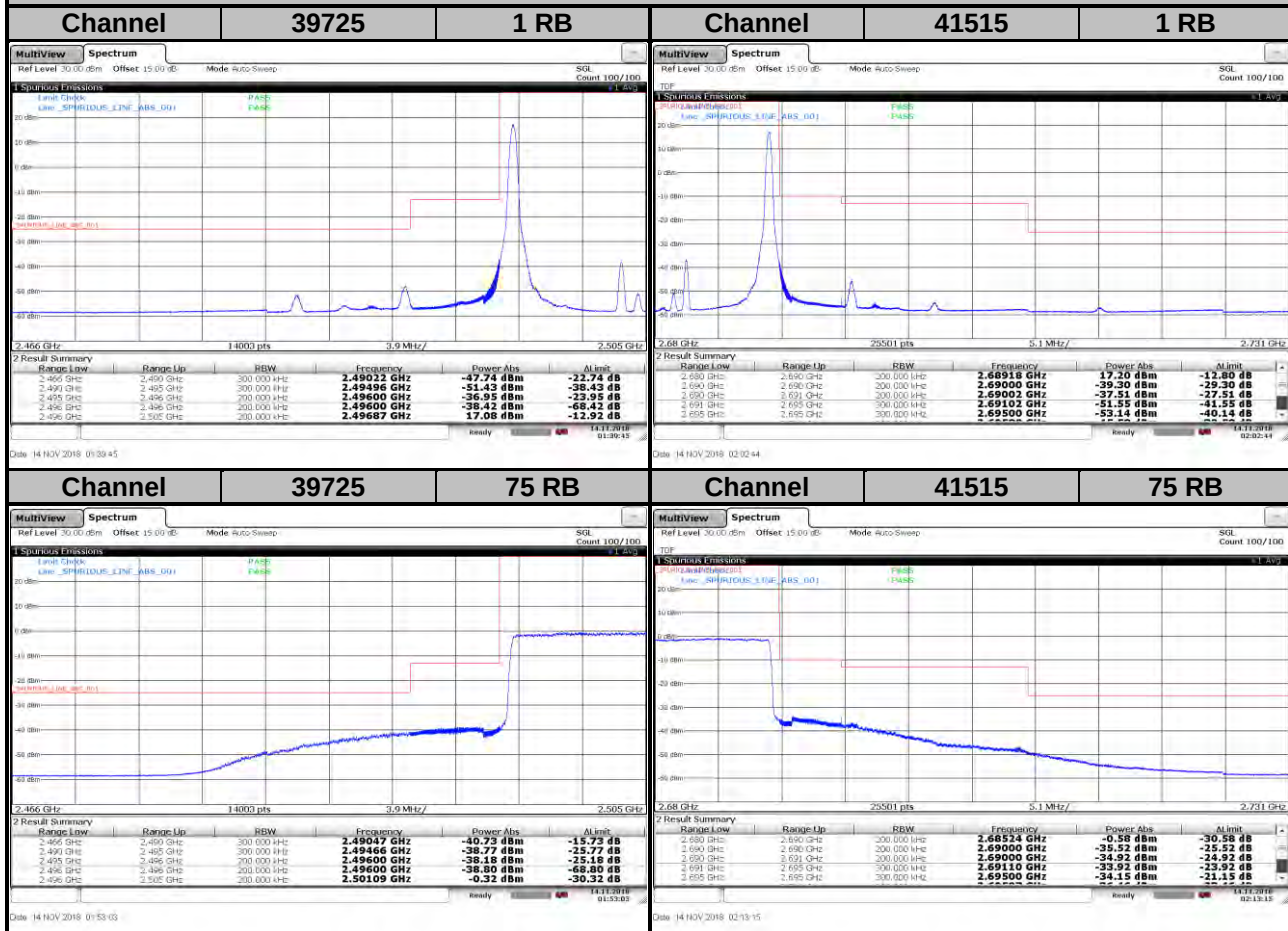


LTE Band 41
Channel Bandwidth: 15 MHz / 64QAM

<Out-of-Band Emissions>

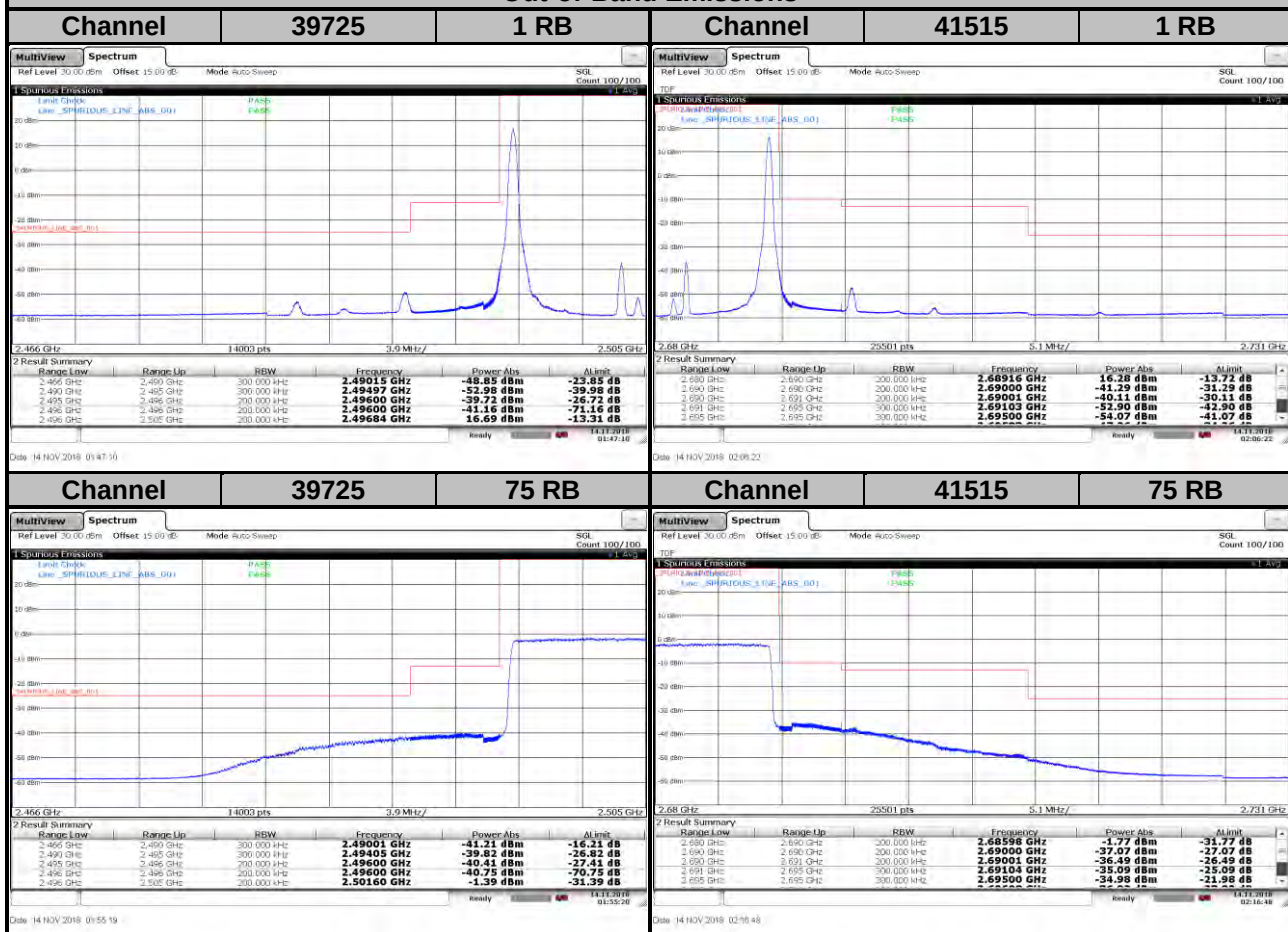


LTE Band 41
Channel Bandwidth: 20 MHz / QPSK
<Out-of-Band Emissions>

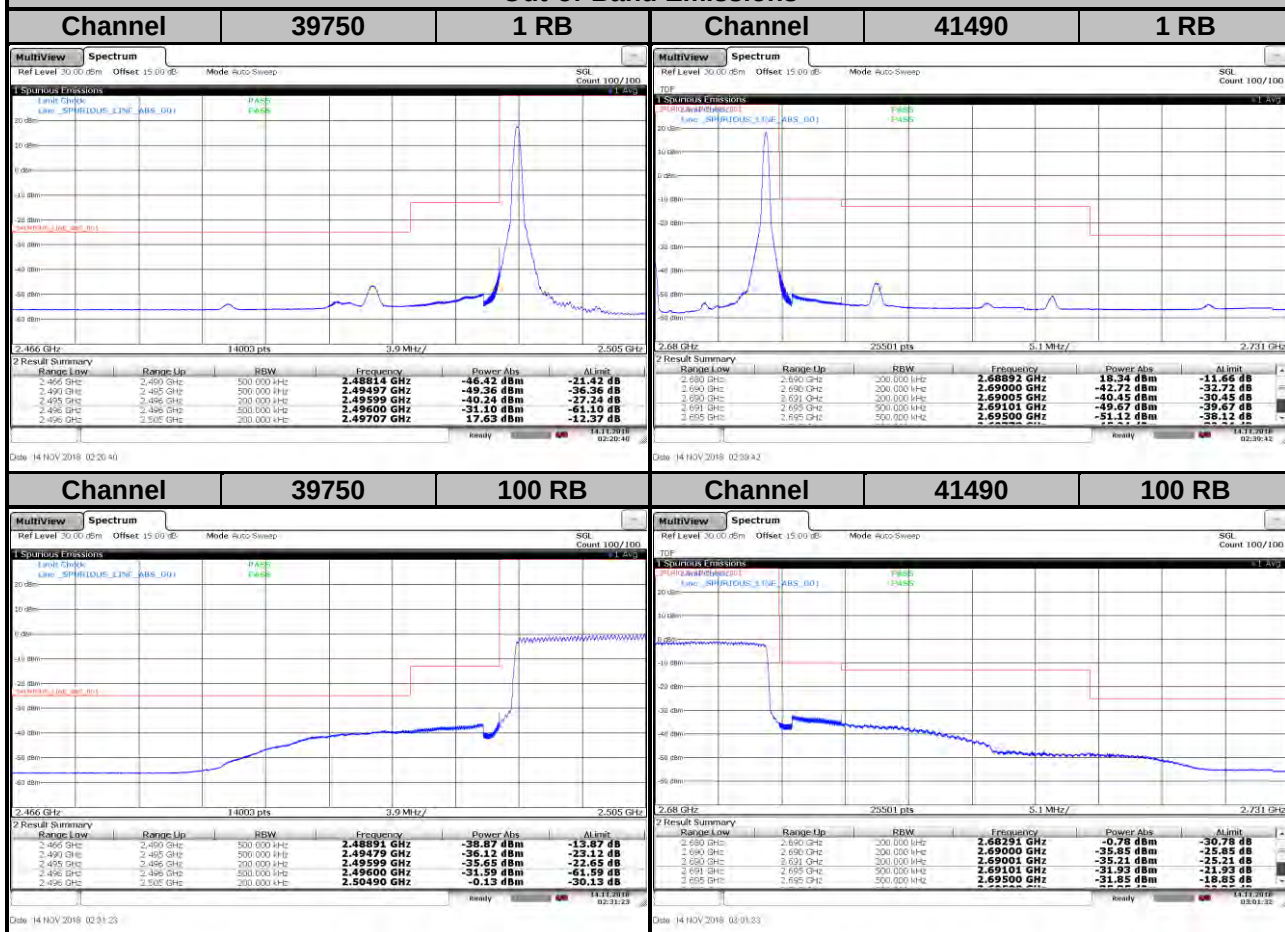


LTE Band 41
Channel Bandwidth: 20 MHz / 16QAM

<Out-of-Band Emissions>

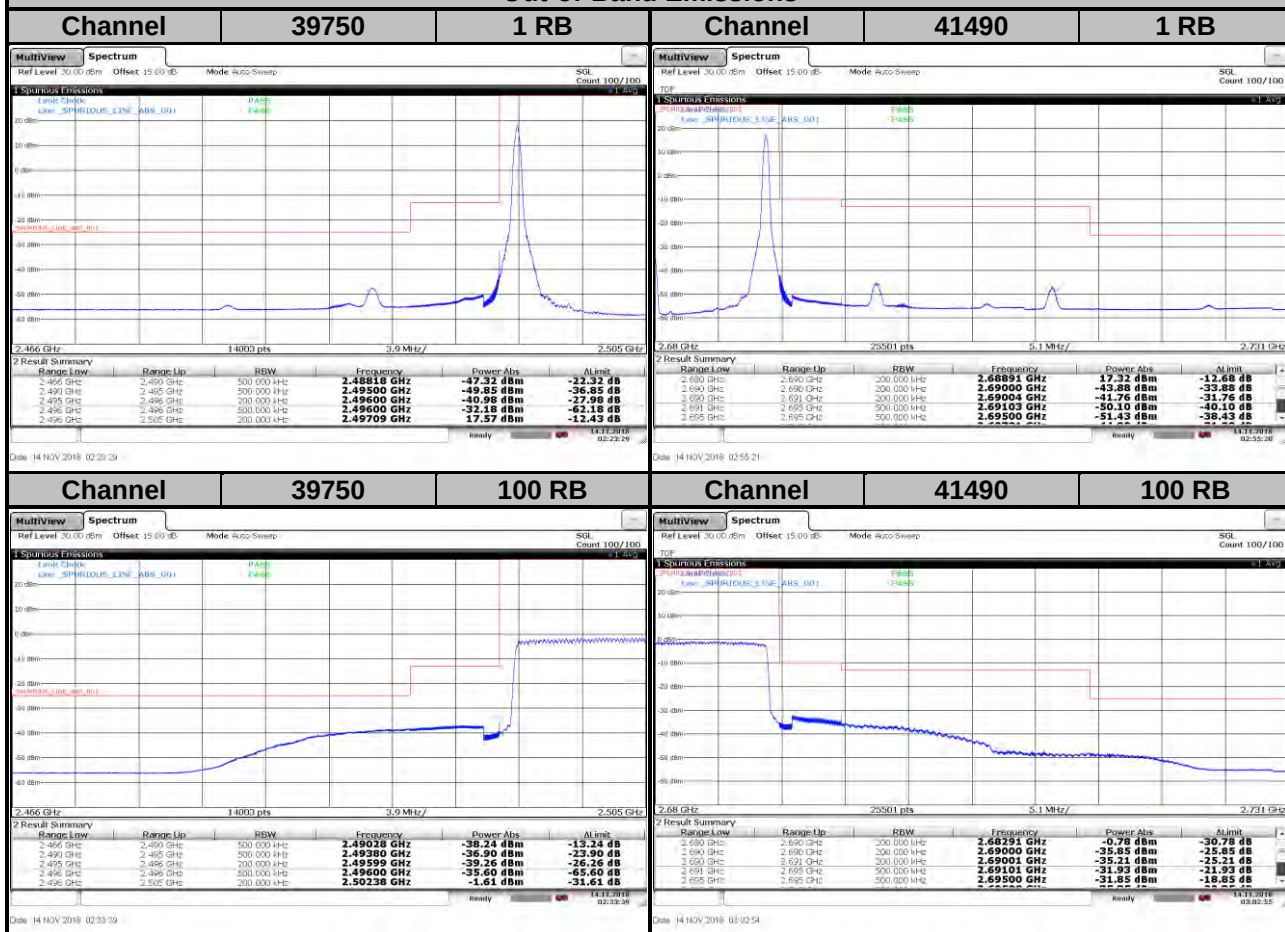

LTE Band 41
Channel Bandwidth: 20 MHz / 64QAM

<Out-of-Band Emissions>

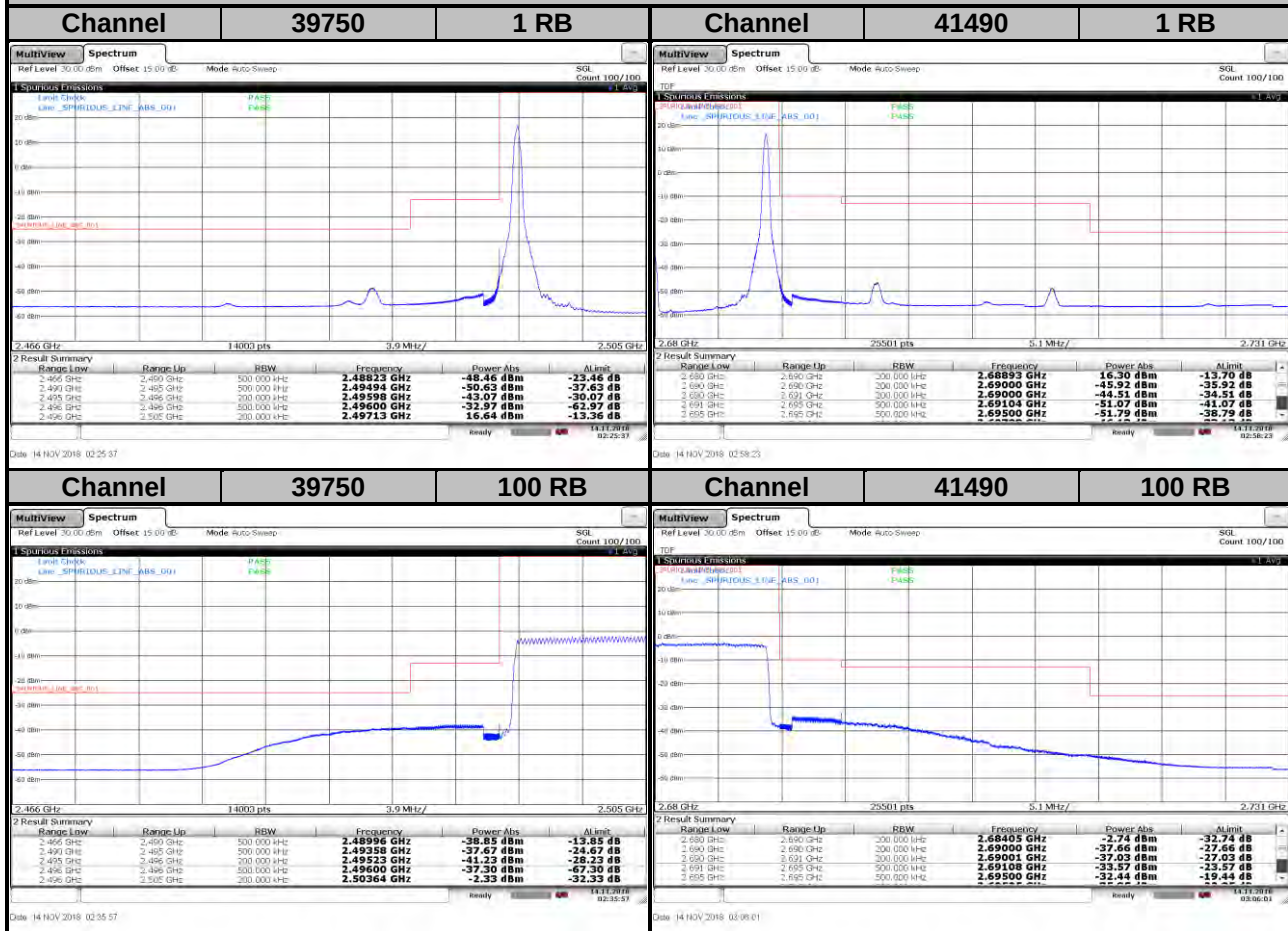


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

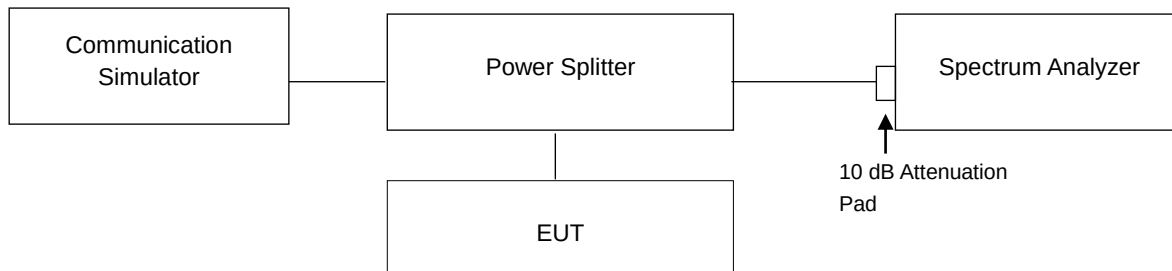


4.6.3 Test Procedures

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 7									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20775	2502.5	3.41	4.14	5.11	20800	2505.0	3.35	4.05	5.11
21100	2535.0	3.60	4.82	5.83	21100	2535.0	3.39	4.16	5.25
21425	2567.5	3.58	4.72	5.79	21400	2565.0	3.49	5.07	6.08

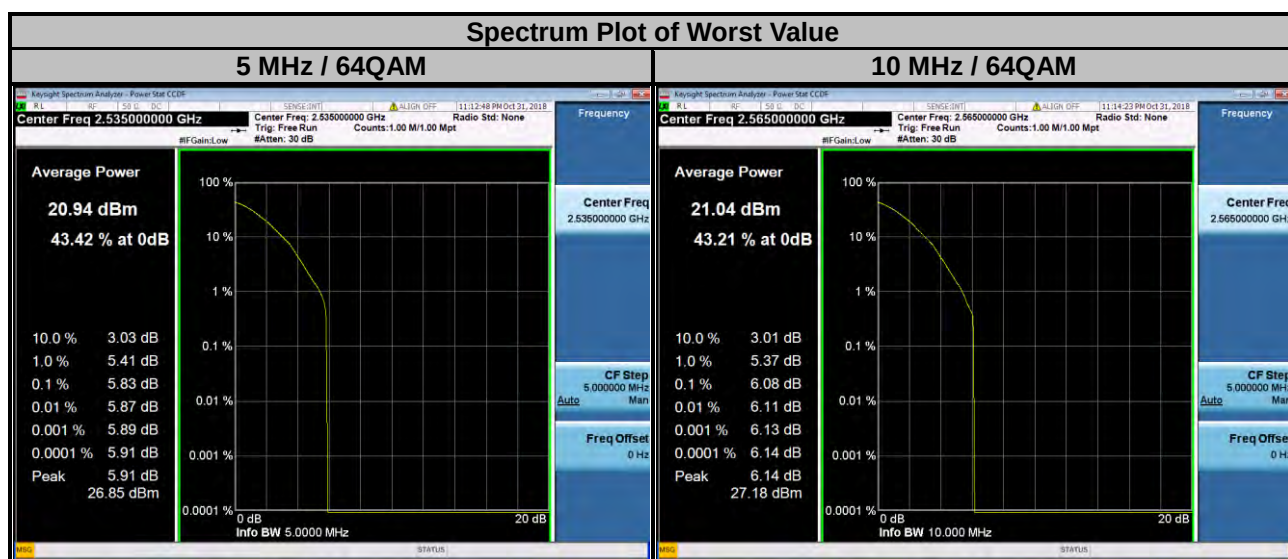

LTE Band 7

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20825	2507.5	3.33	4.03	5.06	20850	2510.0	3.32	4.06	5.05
21100	2535.0	3.43	4.57	5.63	21100	2535.0	3.48	5.02	6.21
21375	2562.5	3.49	4.67	5.75	21350	2560.0	3.47	4.98	5.92


Spectrum Plot of Worst Value

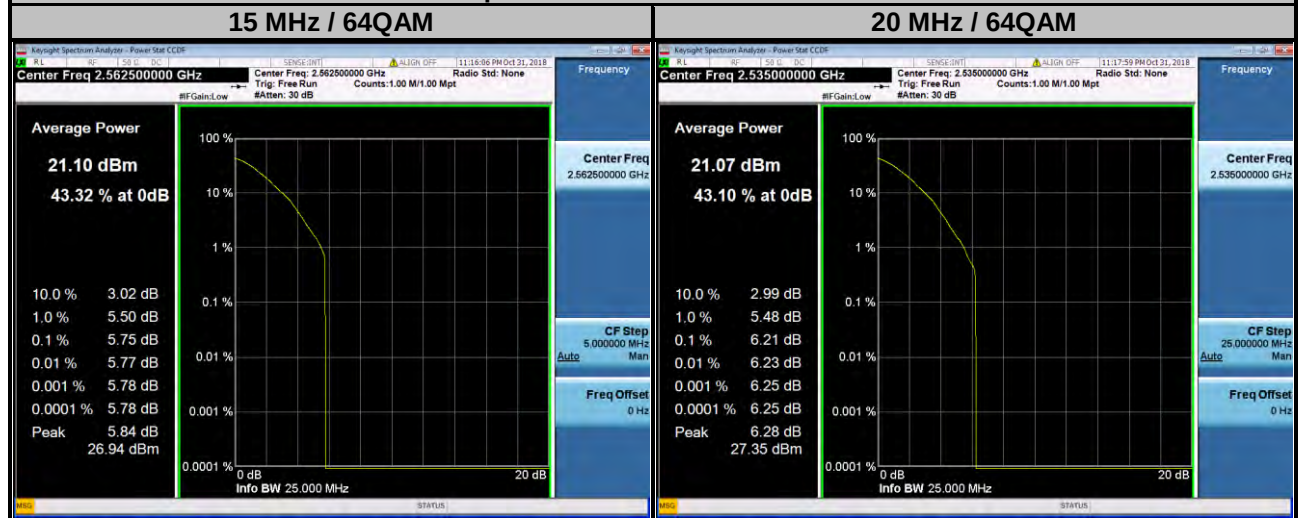

LTE Band 38

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37775	2572.5	3.73	4.85	4.94	37800	2575.0	3.65	5.46	4.59
38000	2595.0	3.87	5.77	5.71	38000	2595.0	3.67	5.37	5.15
38225	2617.5	3.58	5.42	5.28	38200	2615.0	3.52	5.33	5.23


Spectrum Plot of Worst Value

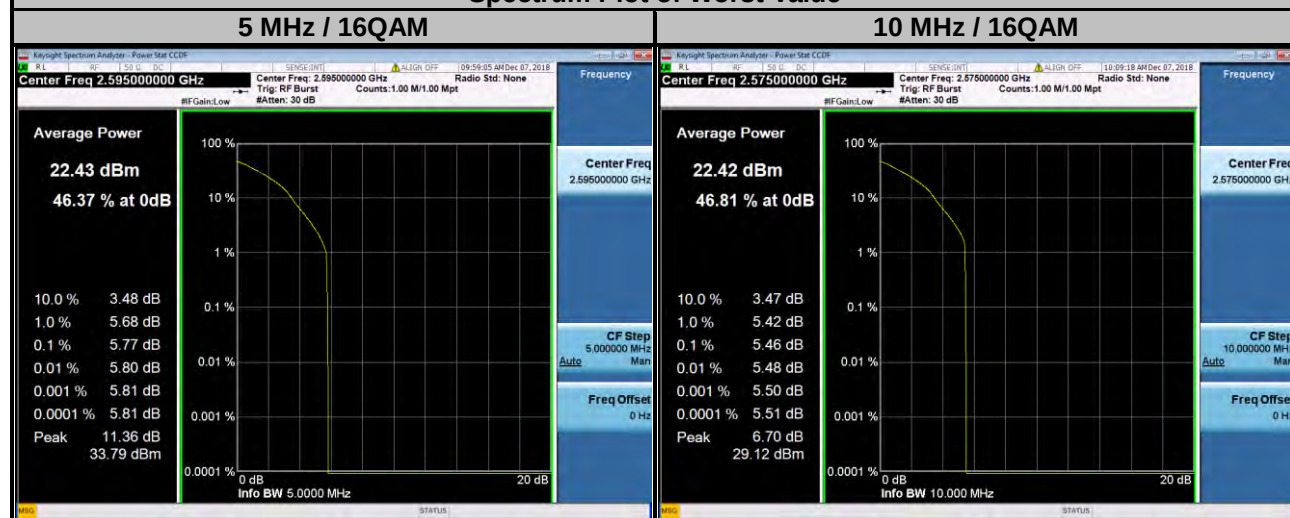

LTE Band 38

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
37825	2577.5	4.35	5.32	5.43	37850	2580.0	4.41	5.46	5.12
38000	2595.0	4.77	5.81	5.29	38000	2595.0	4.36	5.41	5.29
38175	2612.5	3.48	5.54	5.92	38150	2610.0	4.36	5.79	5.78


Spectrum Plot of Worst Value

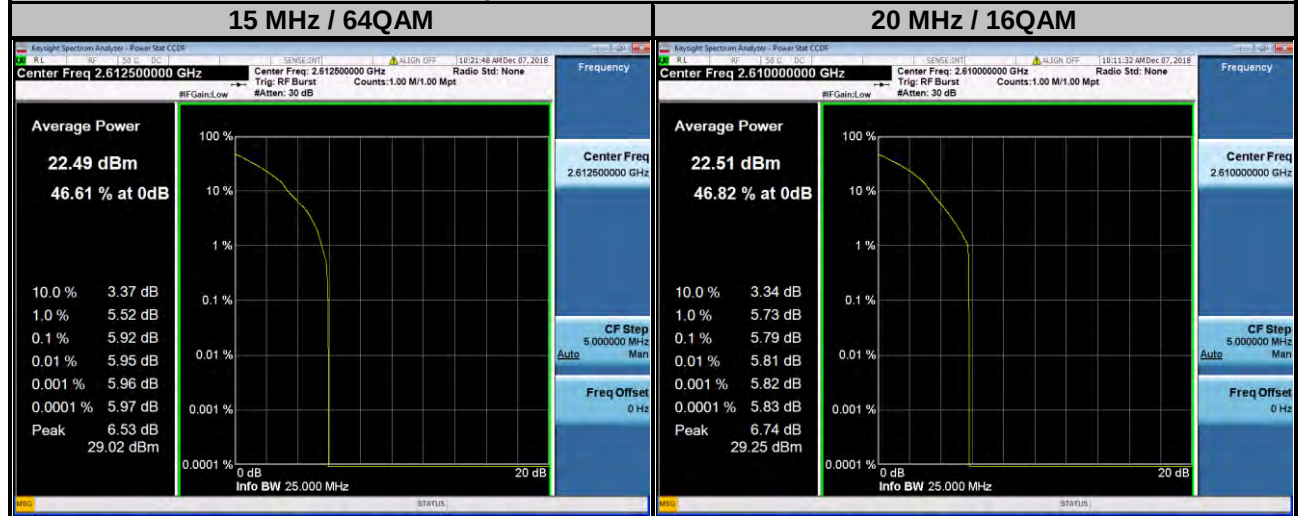

LTE Band 41

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39675	2498.5	3.67	4.41	5.47	39700	2501.0	3.52	4.34	5.75
40620	2593.0	3.61	4.16	5.17	40620	2593.0	3.88	6.03	6.89
41565	2687.5	3.85	5.87	6.72	41540	2685.0	3.62	4.37	5.64


Spectrum Plot of Worst Value

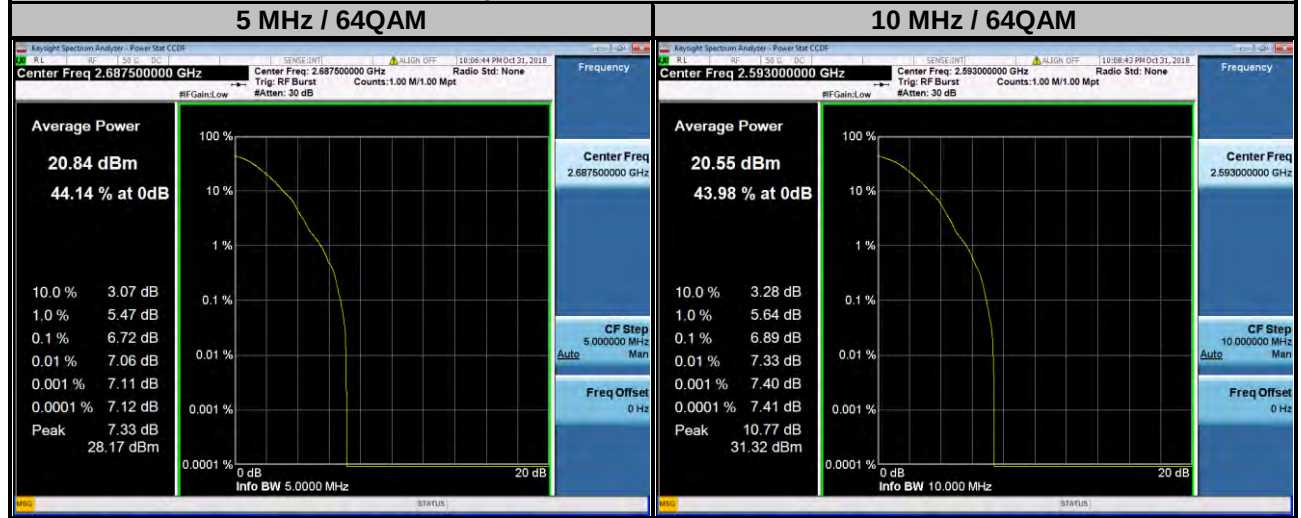

LTE Band 41

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	Peak to Average Ratio (dB)			Channel	Frequency (MHz)	Peak to Average Ratio (dB)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
39725	2503.5	4.34	5.35	5.85	39750	2506.0	4.46	5.24	5.84
40620	2593.0	4.61	6.19	6.83	40620	2593.0	4.48	5.94	6.88
41515	2682.5	4.50	5.08	5.92	41490	2680.0	4.61	5.61	6.31

Spectrum Plot of Worst Value

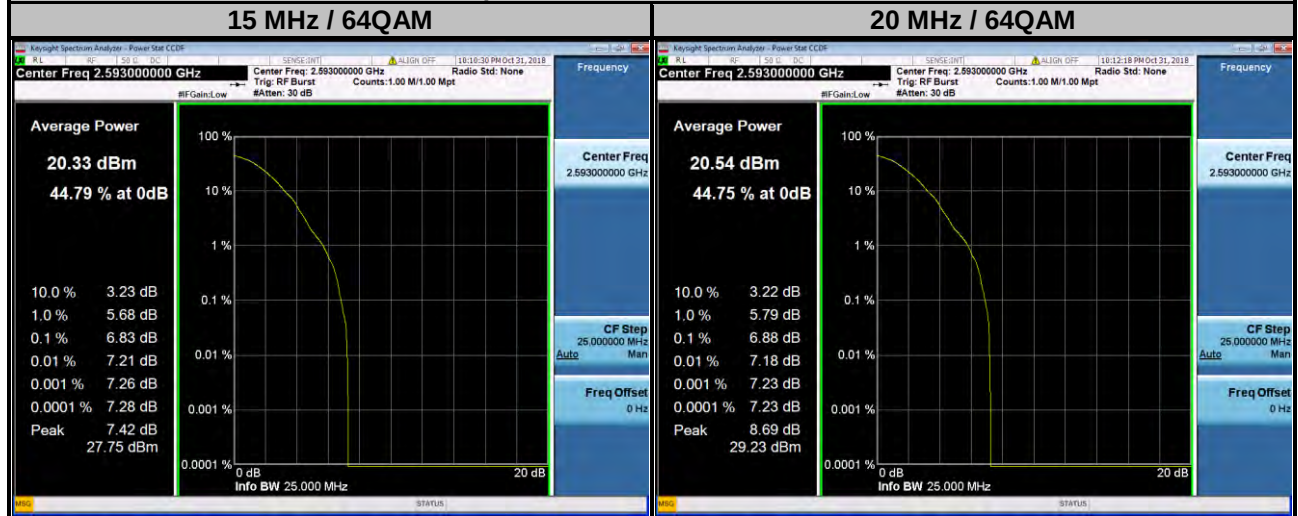


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.


4.7.2 Test Setup

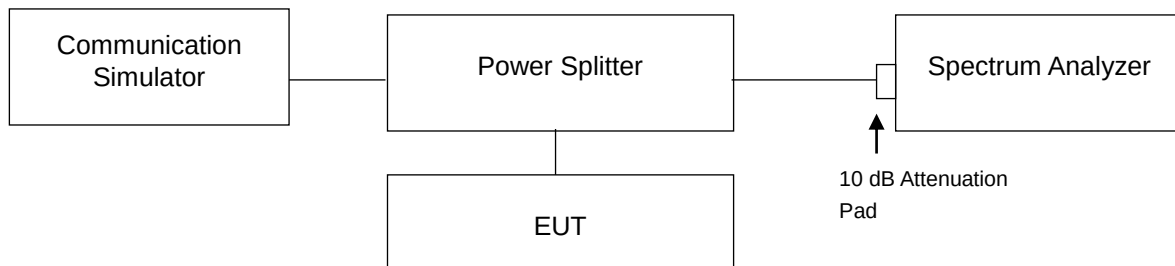


4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.


4.7.4 Test Results

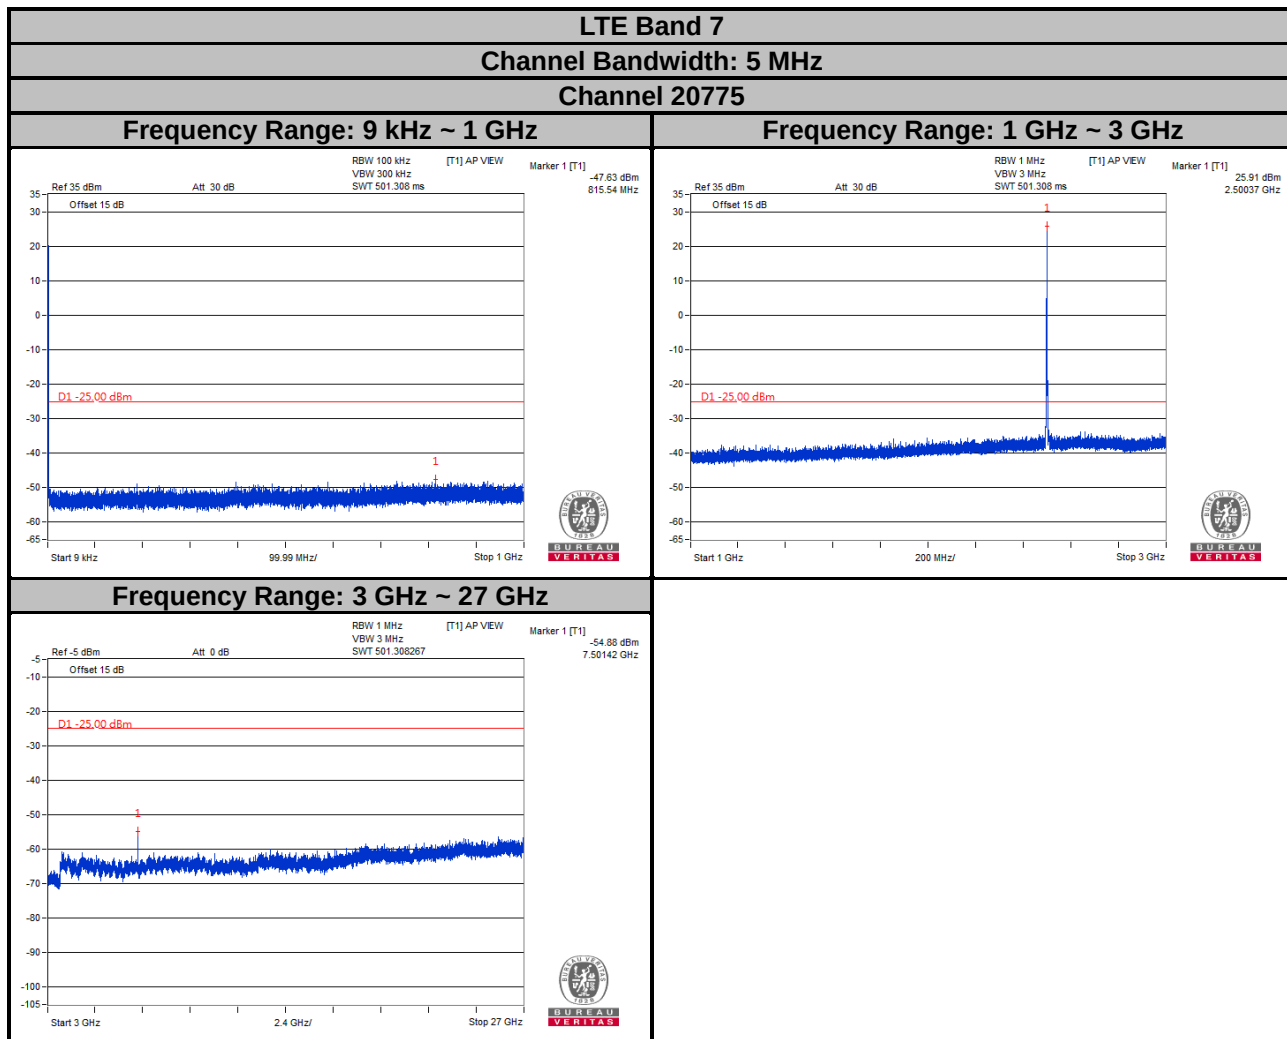


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

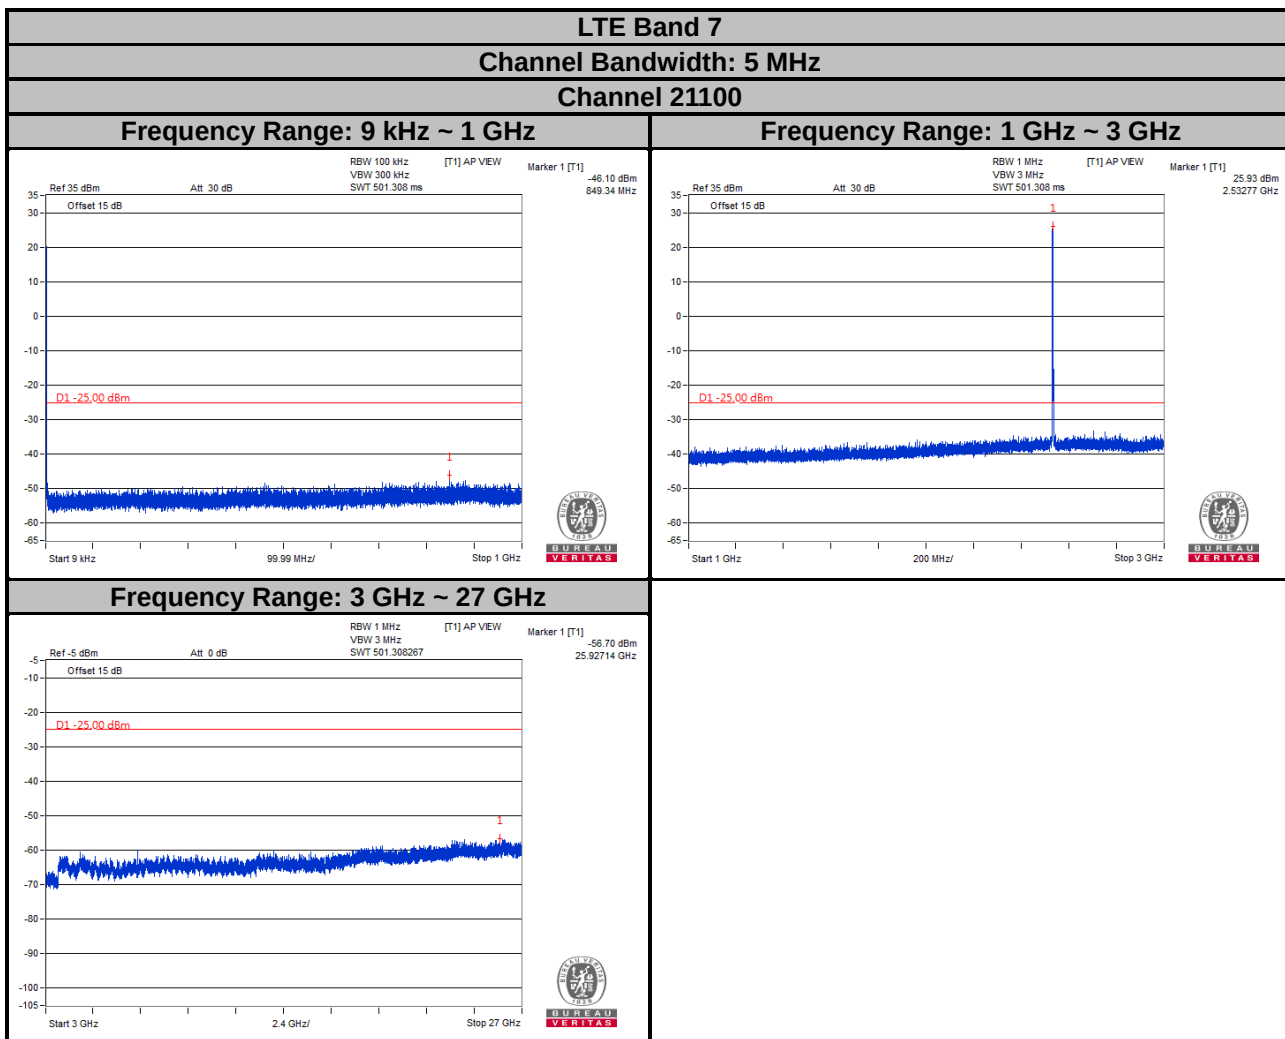


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

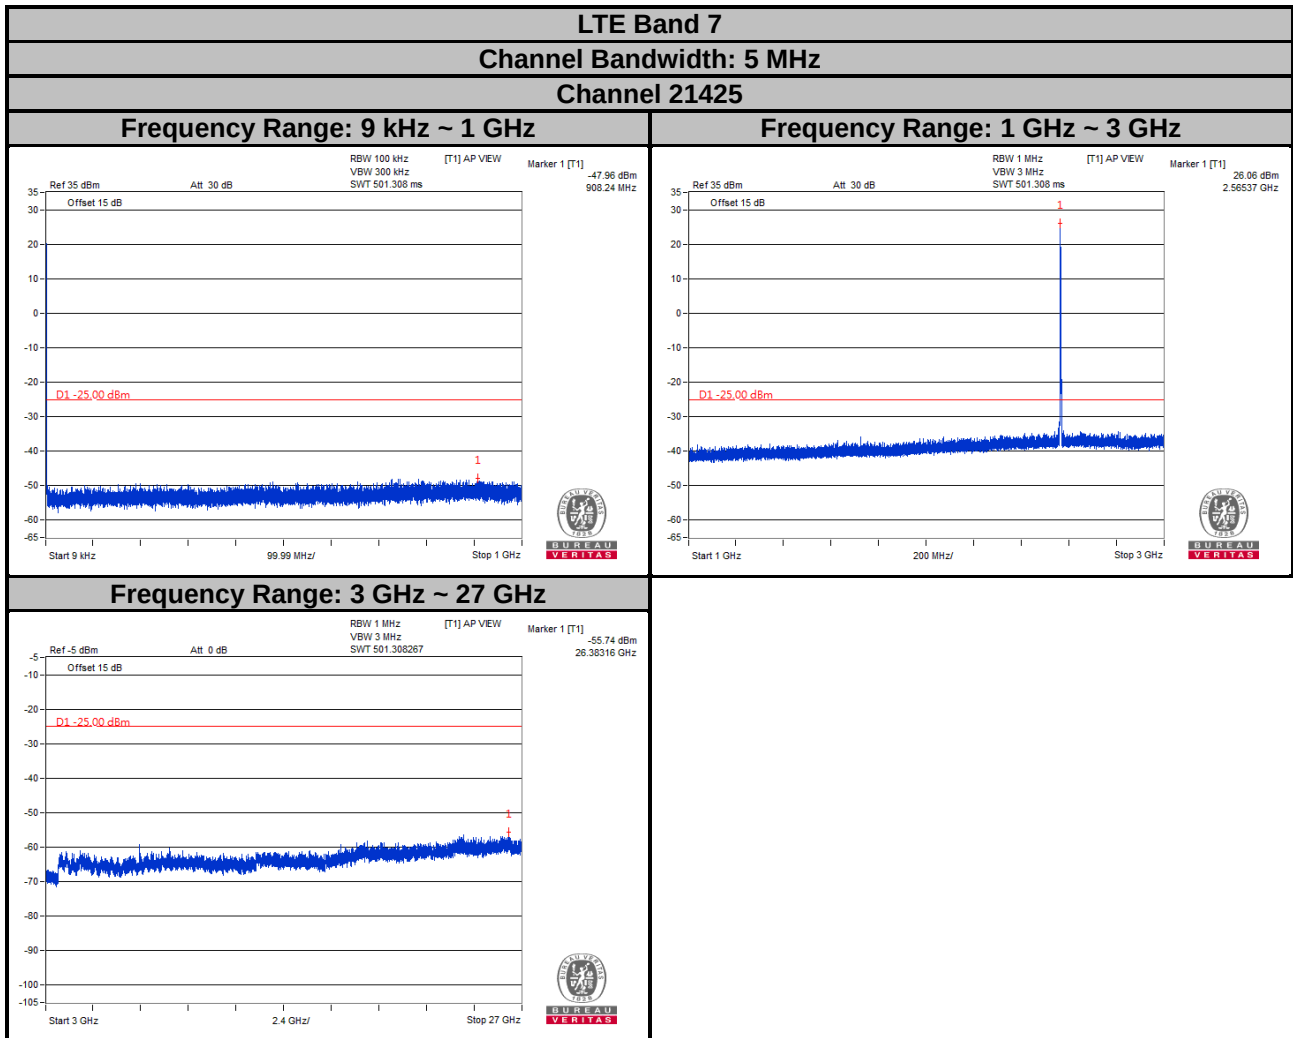

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

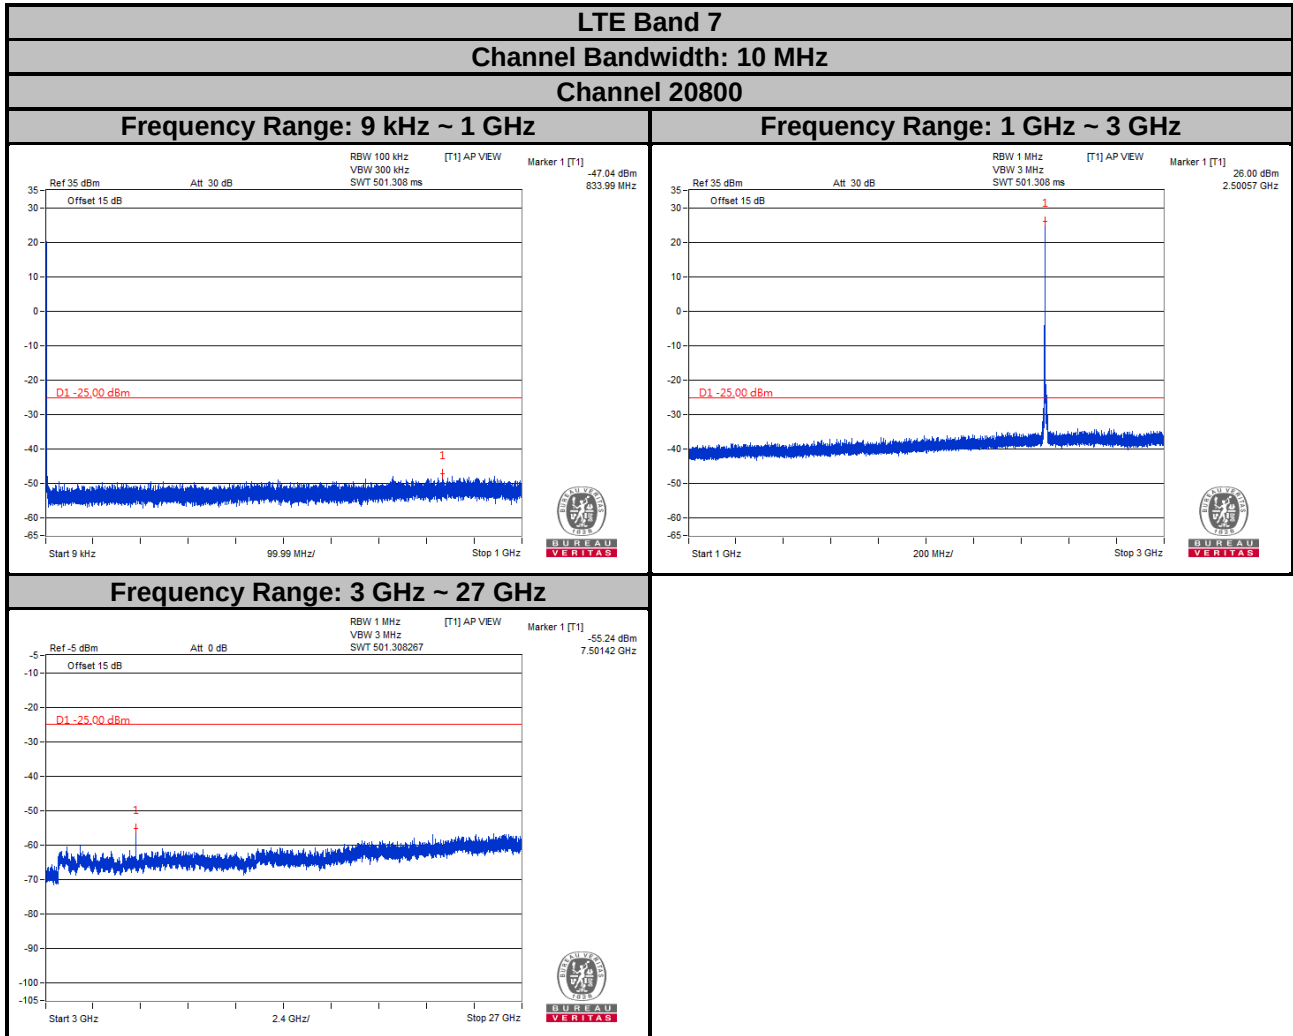

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

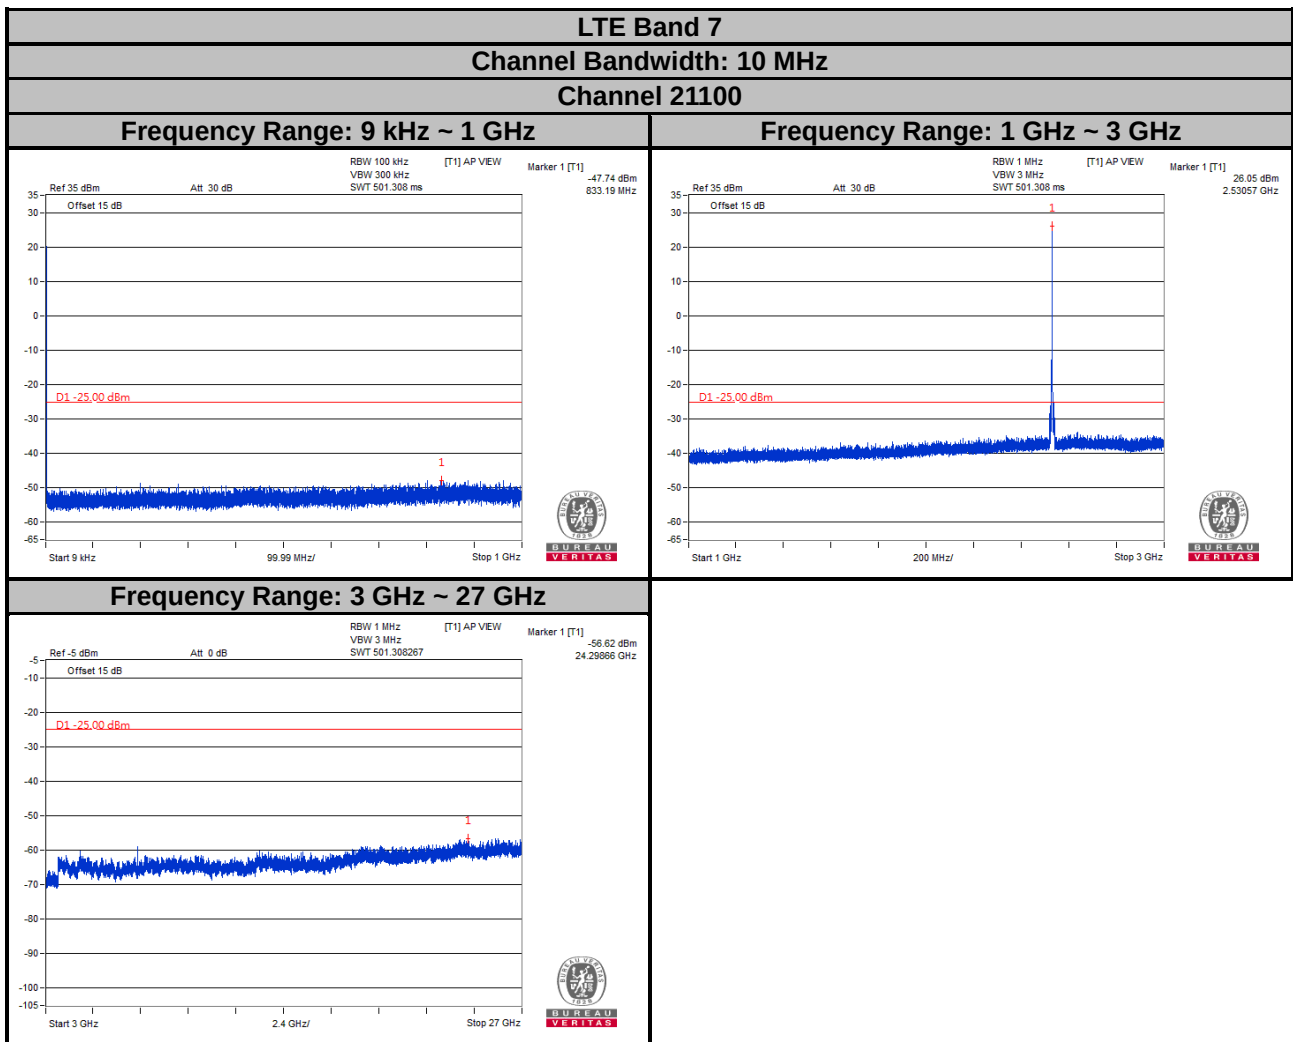


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 7


Channel Bandwidth: 10 MHz

Channel 21400


Frequency Range: 9 kHz ~ 1 GHz

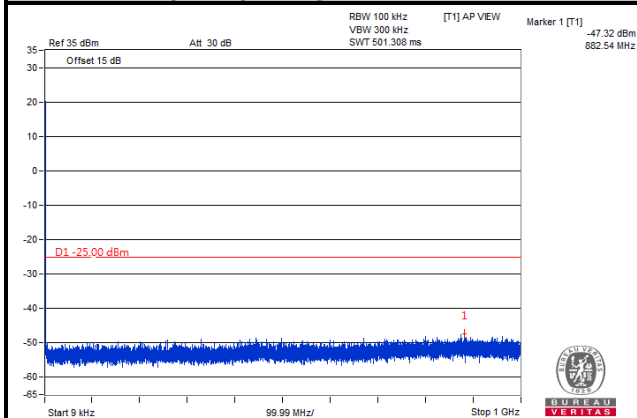


Frequency Range: 1 GHz ~ 3 GHz

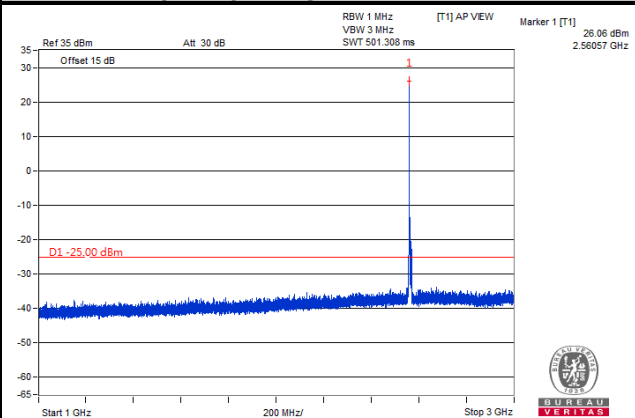


Frequency Range: 3 GHz ~ 27 GHz

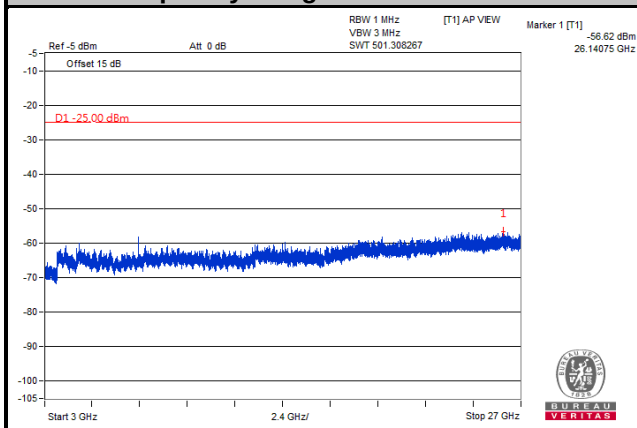


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

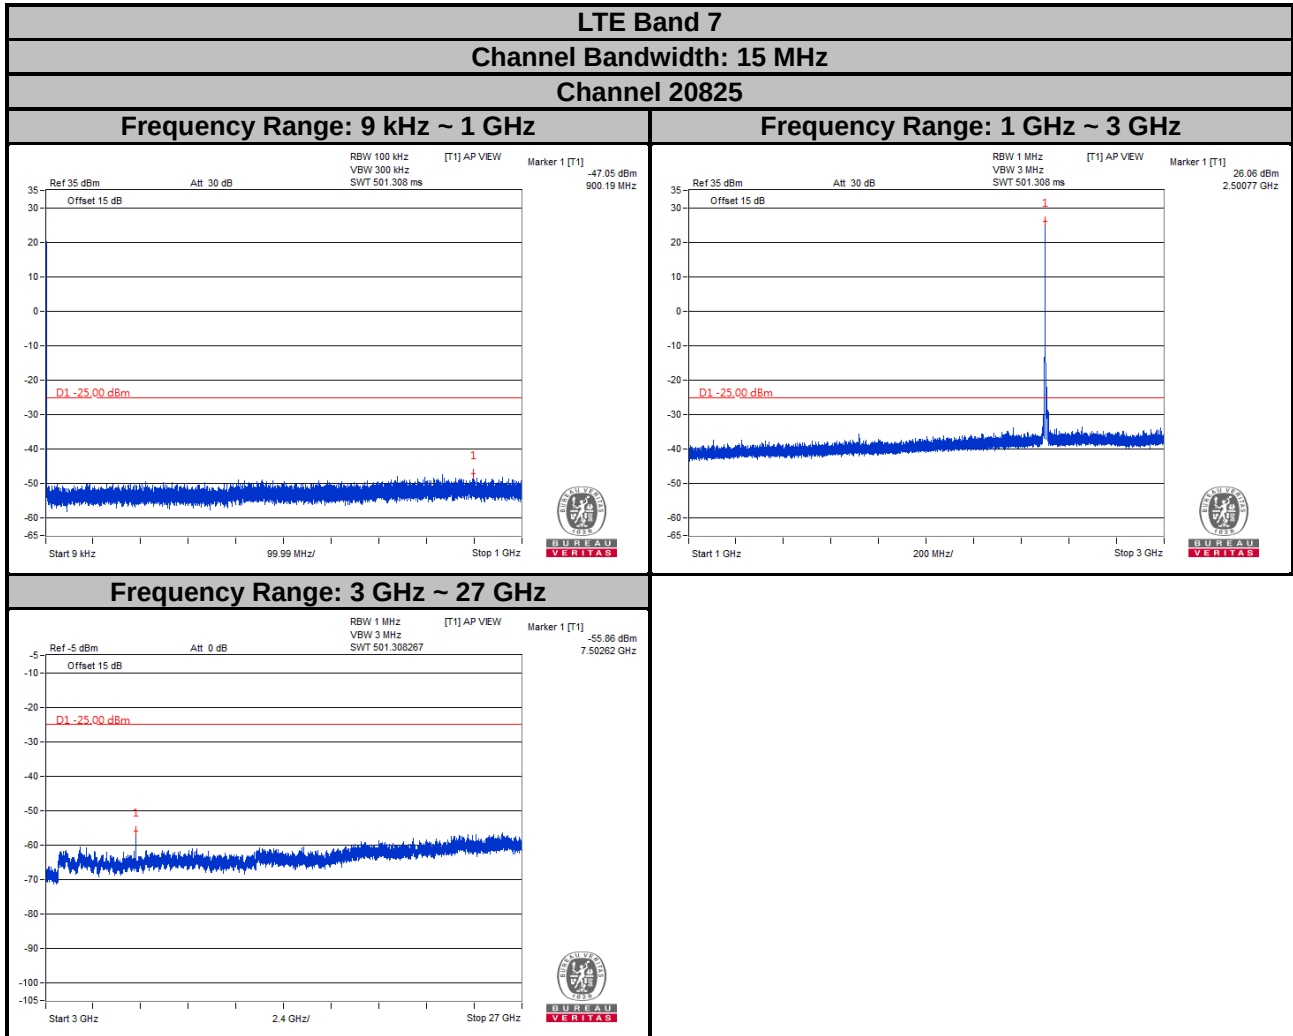


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

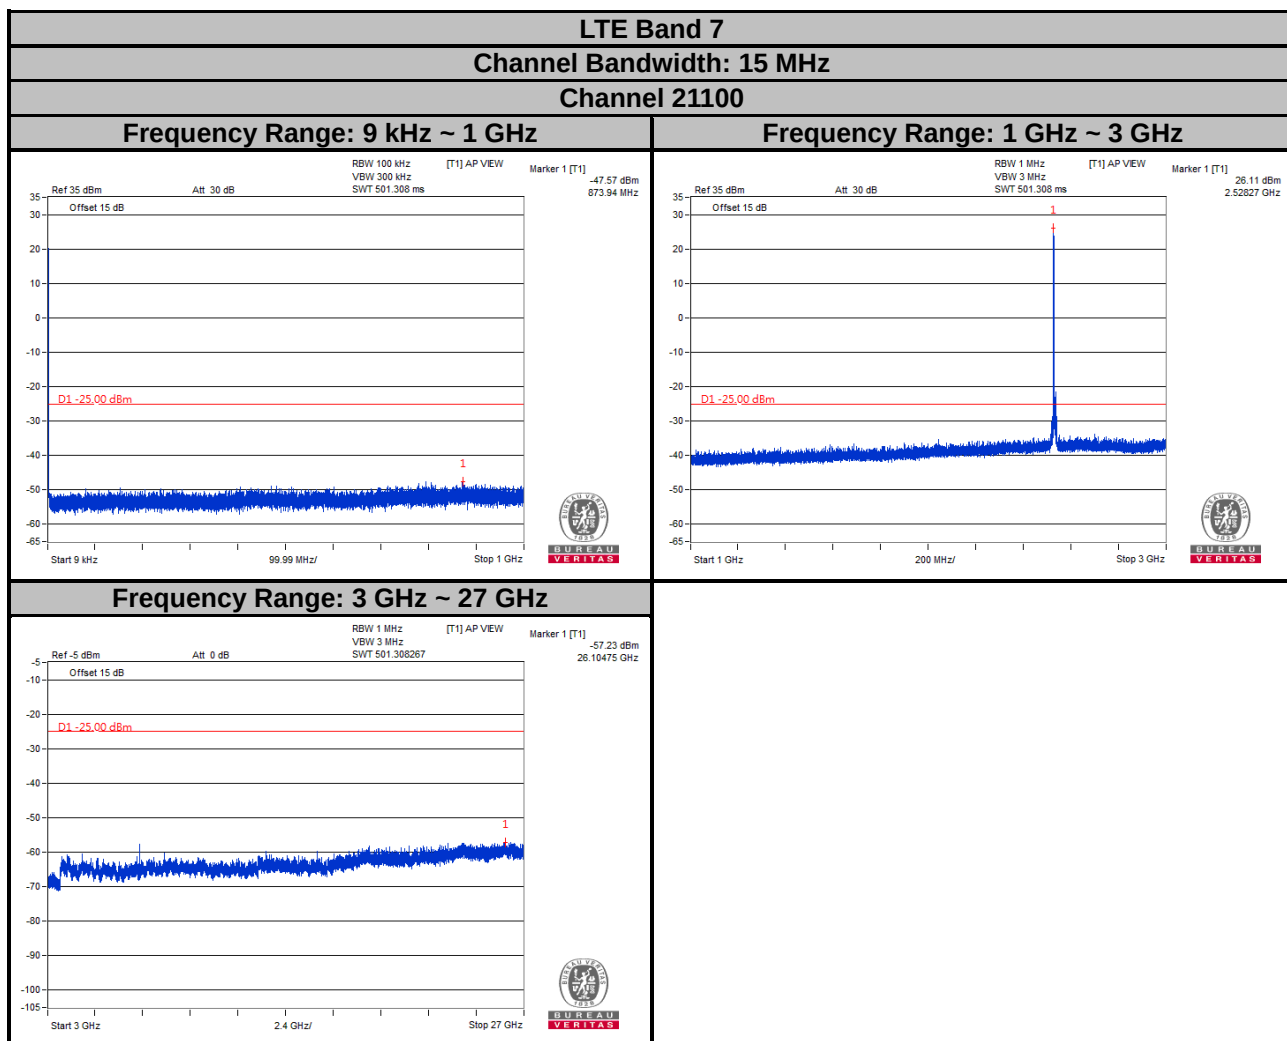


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

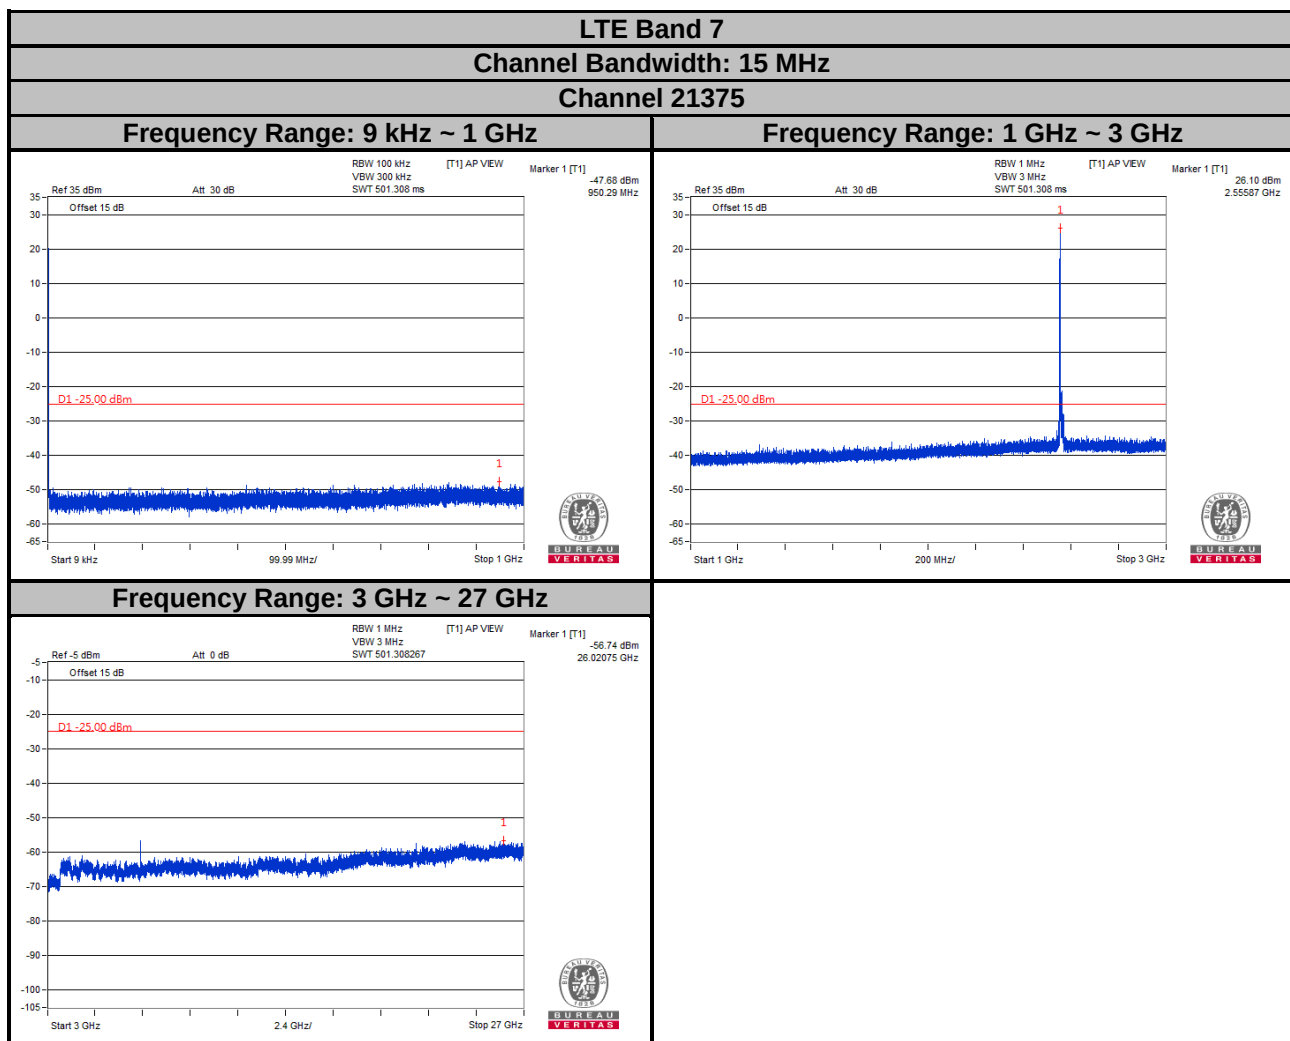


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

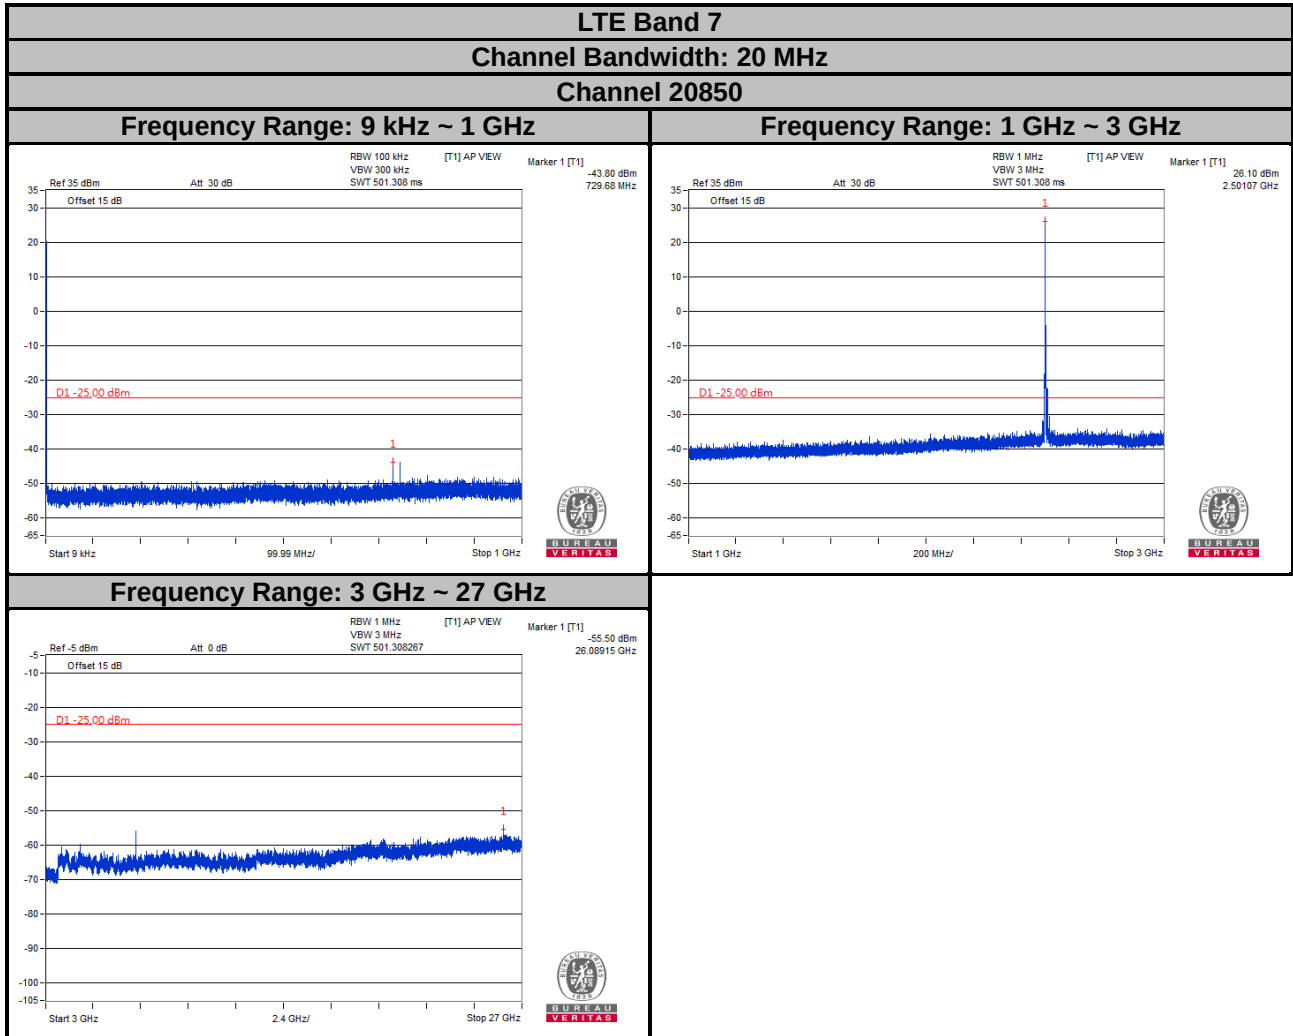

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

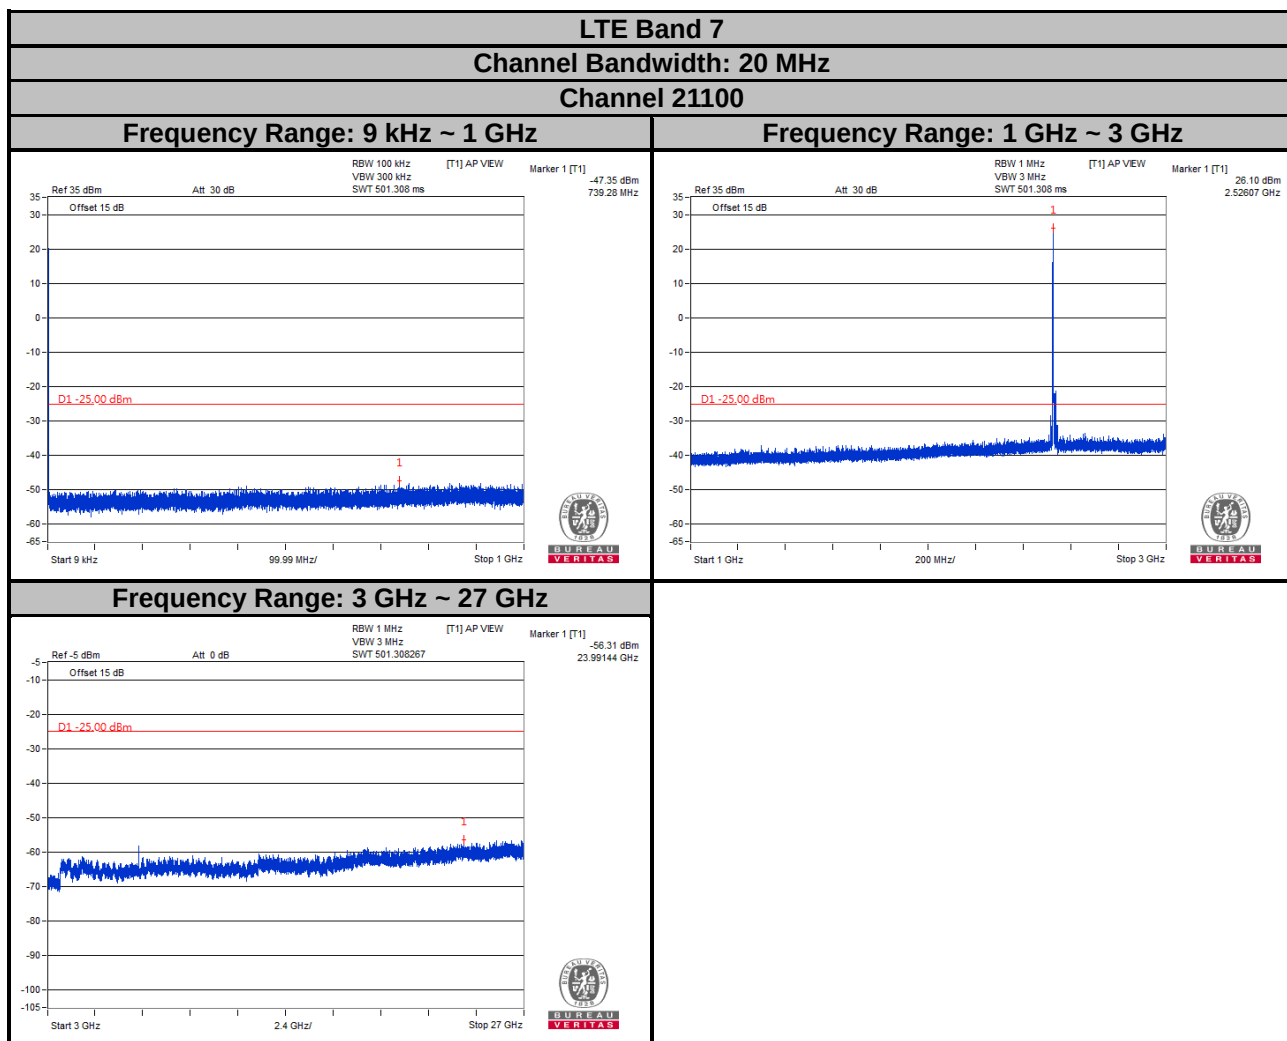

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

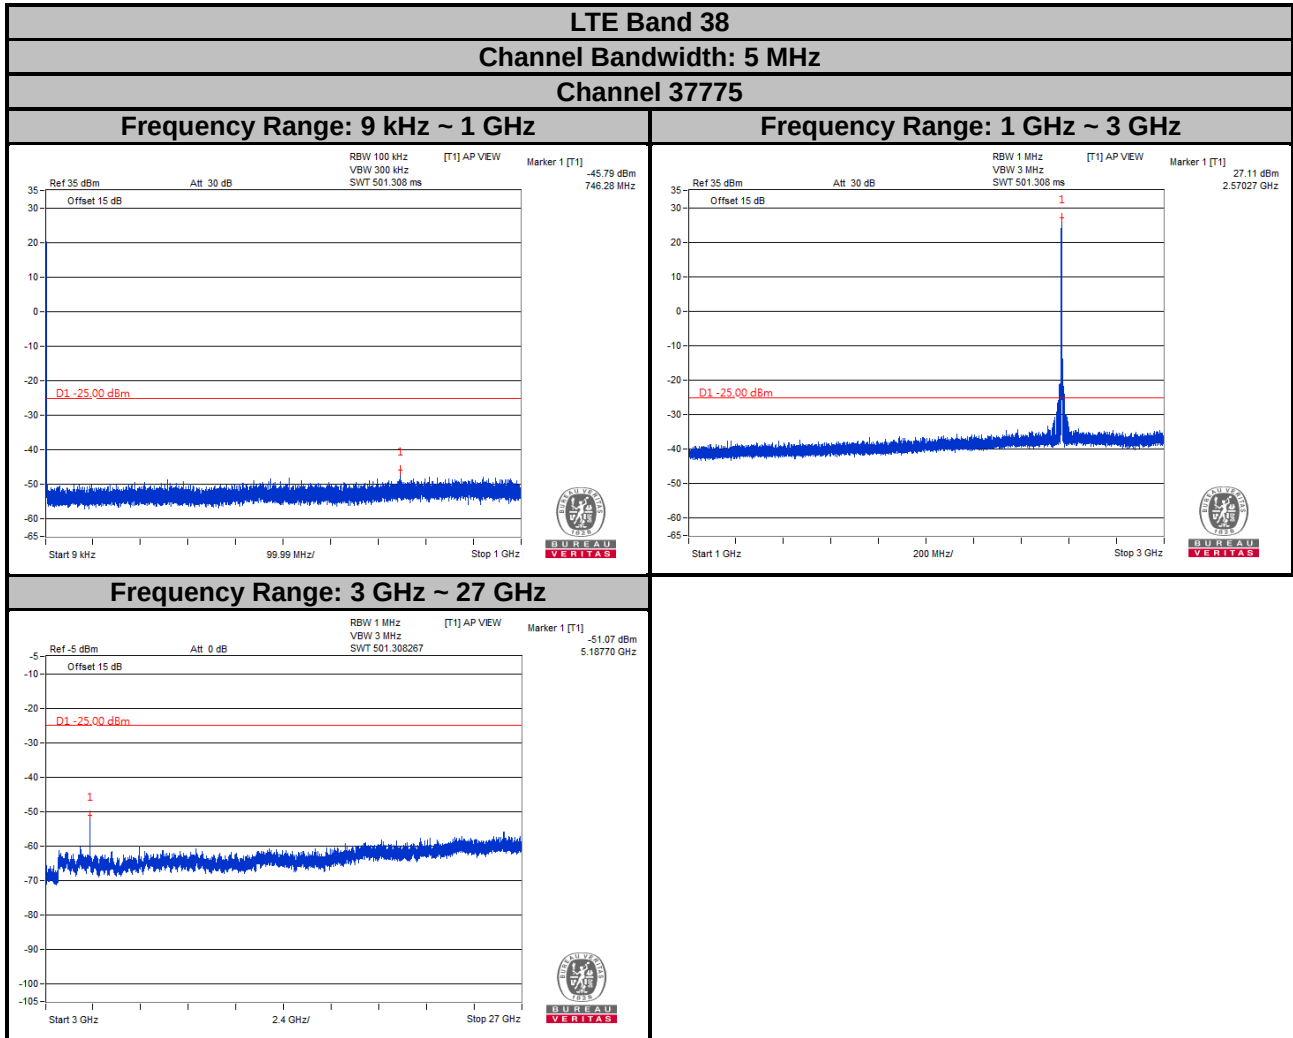


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 38


Channel Bandwidth: 5 MHz

Channel 38000


Frequency Range: 9 kHz ~ 1 GHz

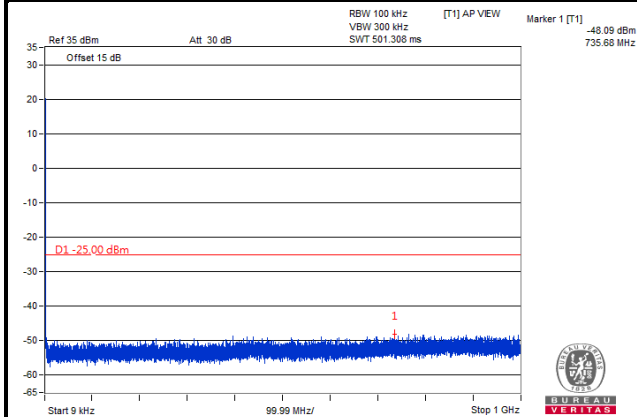

Frequency Range: 1 GHz ~ 3 GHz

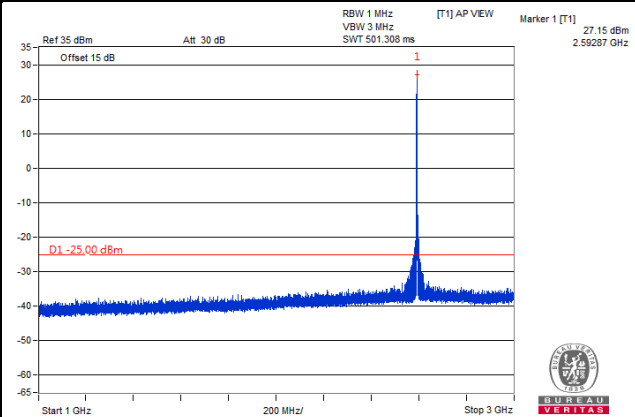

Frequency Range: 3 GHz ~ 27 GHz

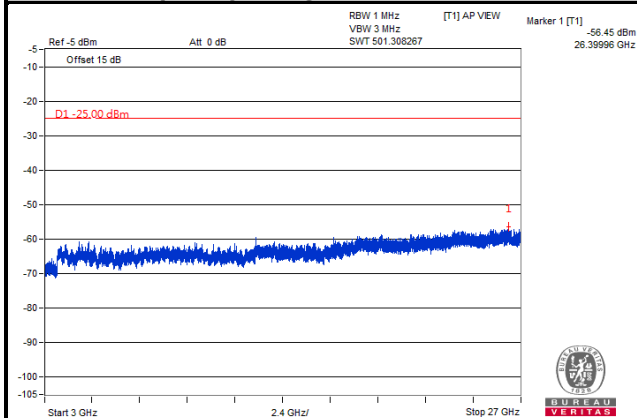


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 38


Channel Bandwidth: 5 MHz

Channel 38225


Frequency Range: 9 kHz ~ 1 GHz

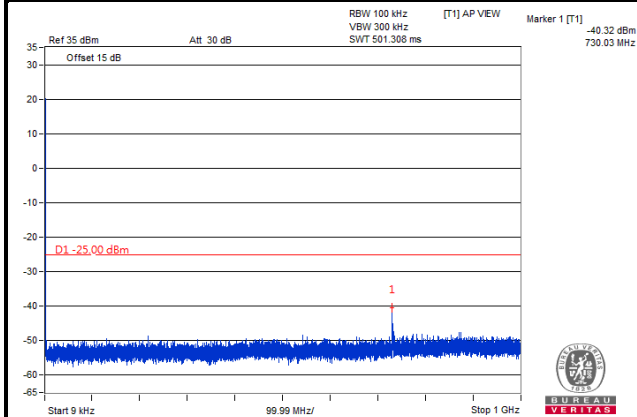


Frequency Range: 1 GHz ~ 3 GHz

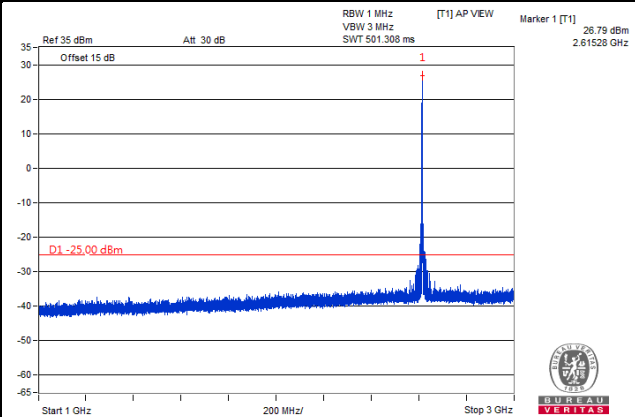


Frequency Range: 3 GHz ~ 27 GHz

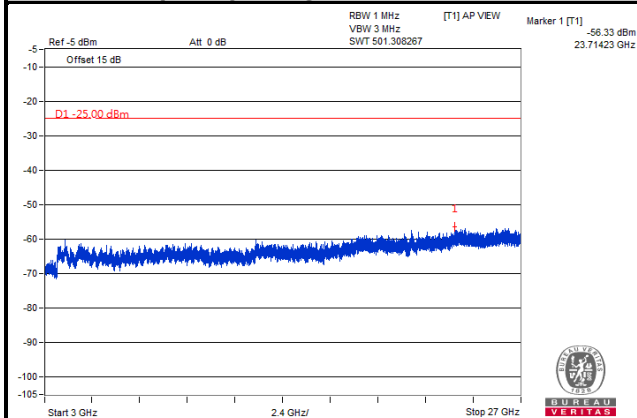


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

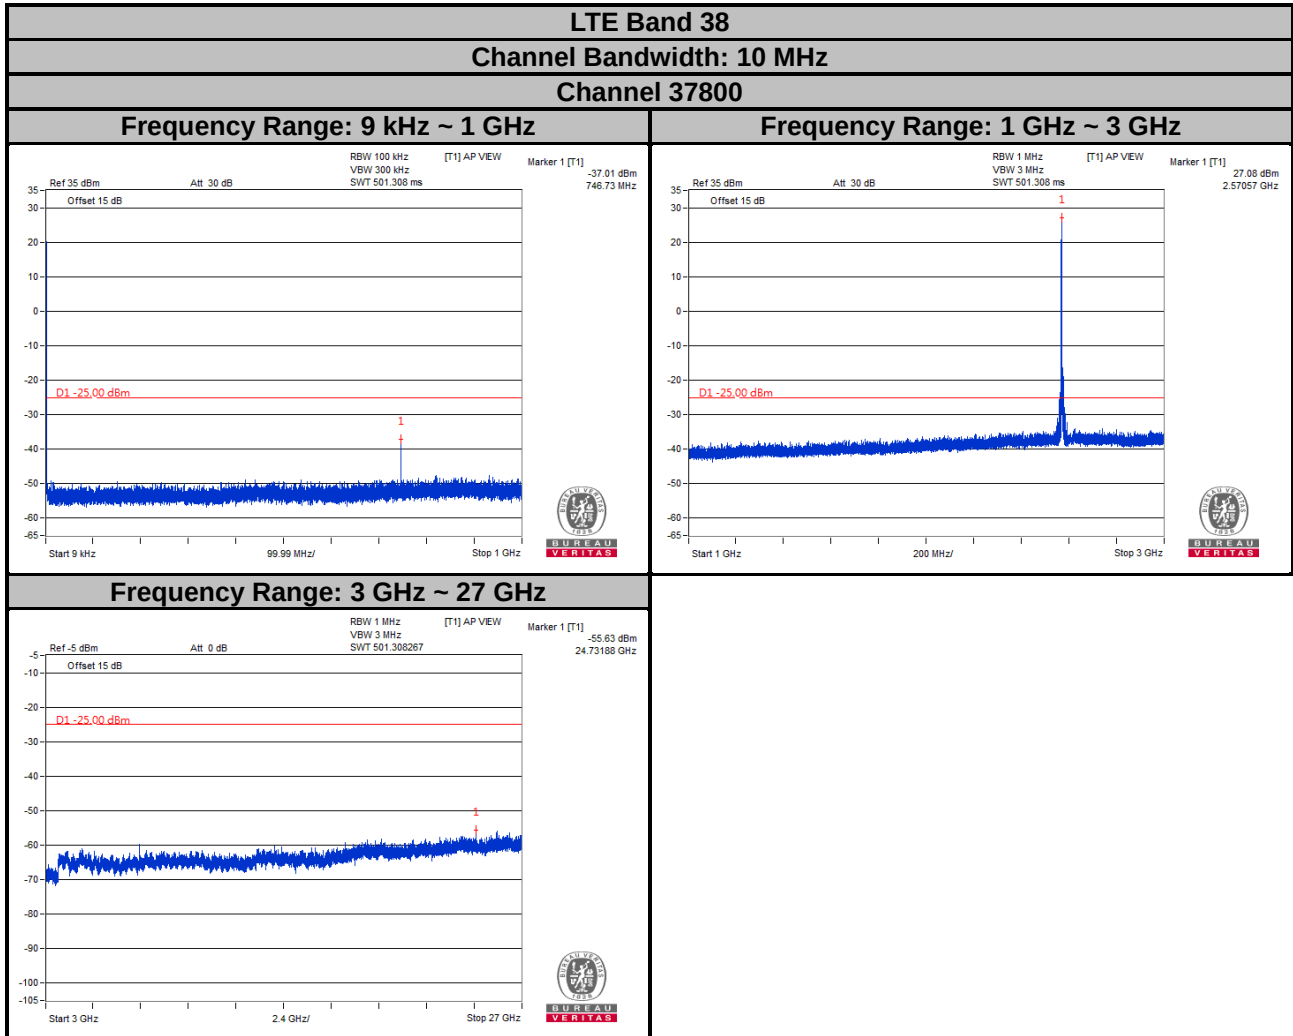

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

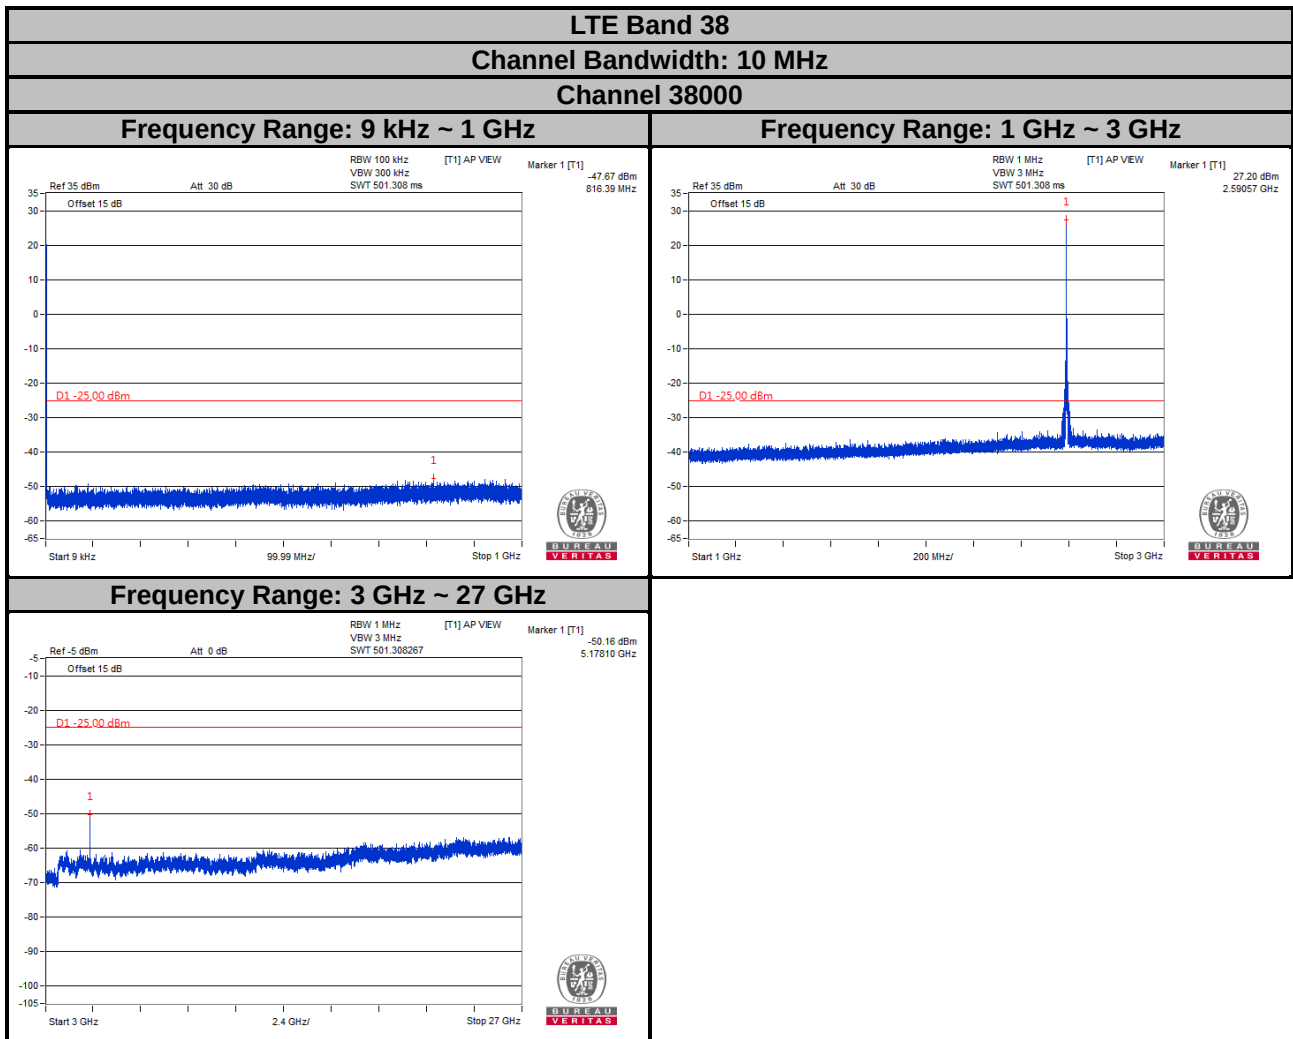

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

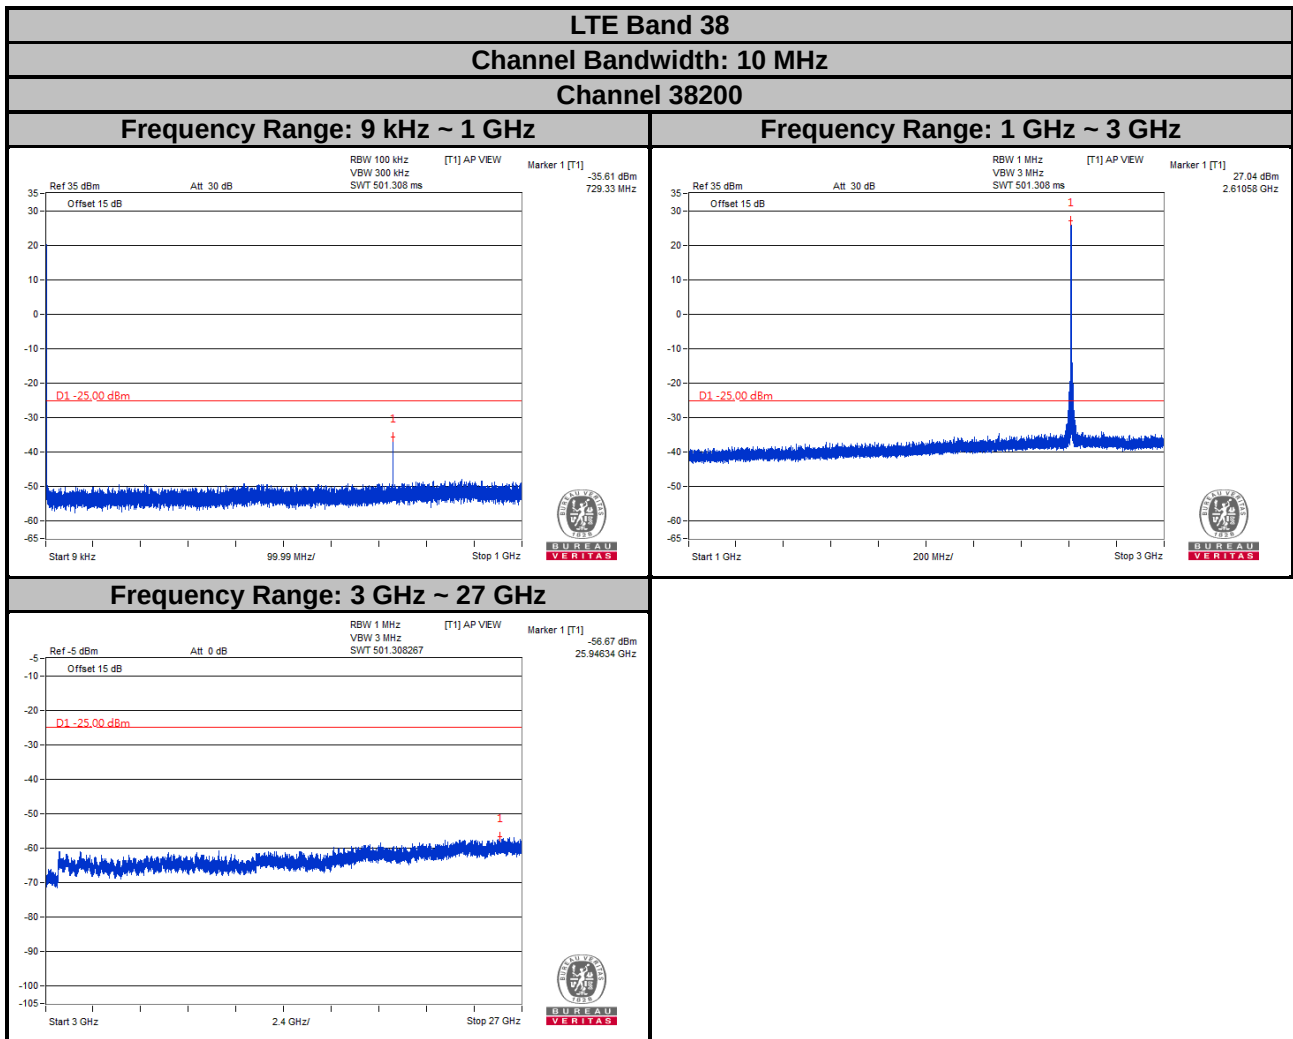


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 38


Channel Bandwidth: 15 MHz

Channel 37825


Frequency Range: 9 kHz ~ 1 GHz

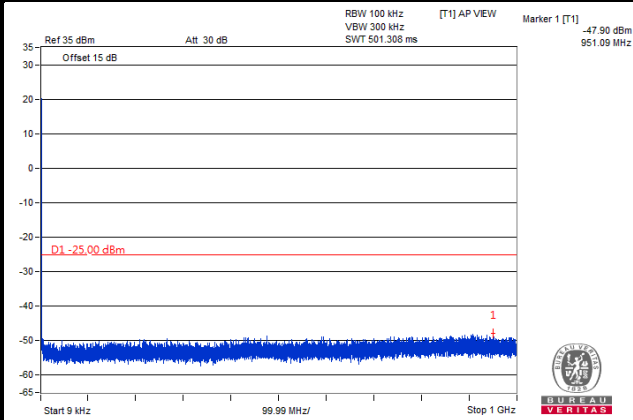


Frequency Range: 1 GHz ~ 3 GHz

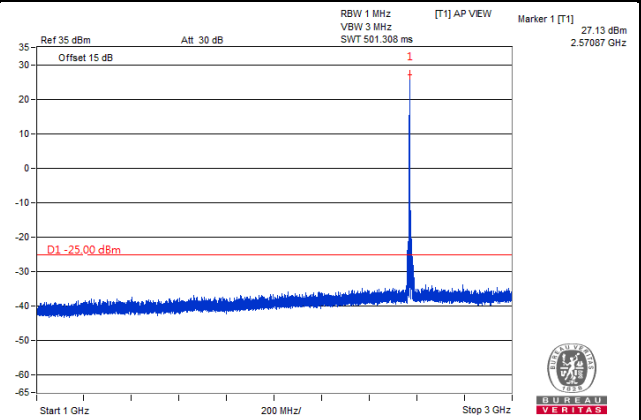


Frequency Range: 3 GHz ~ 27 GHz

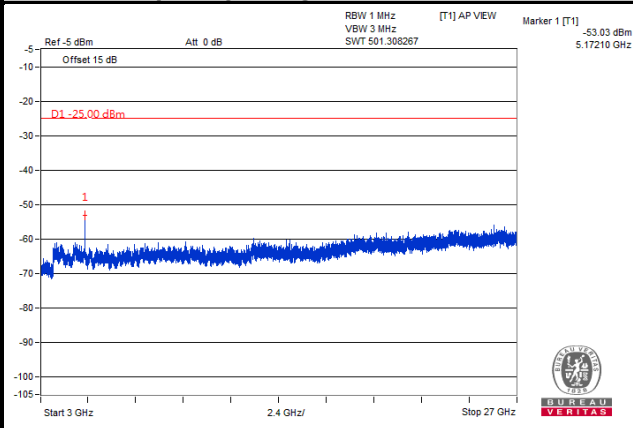

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

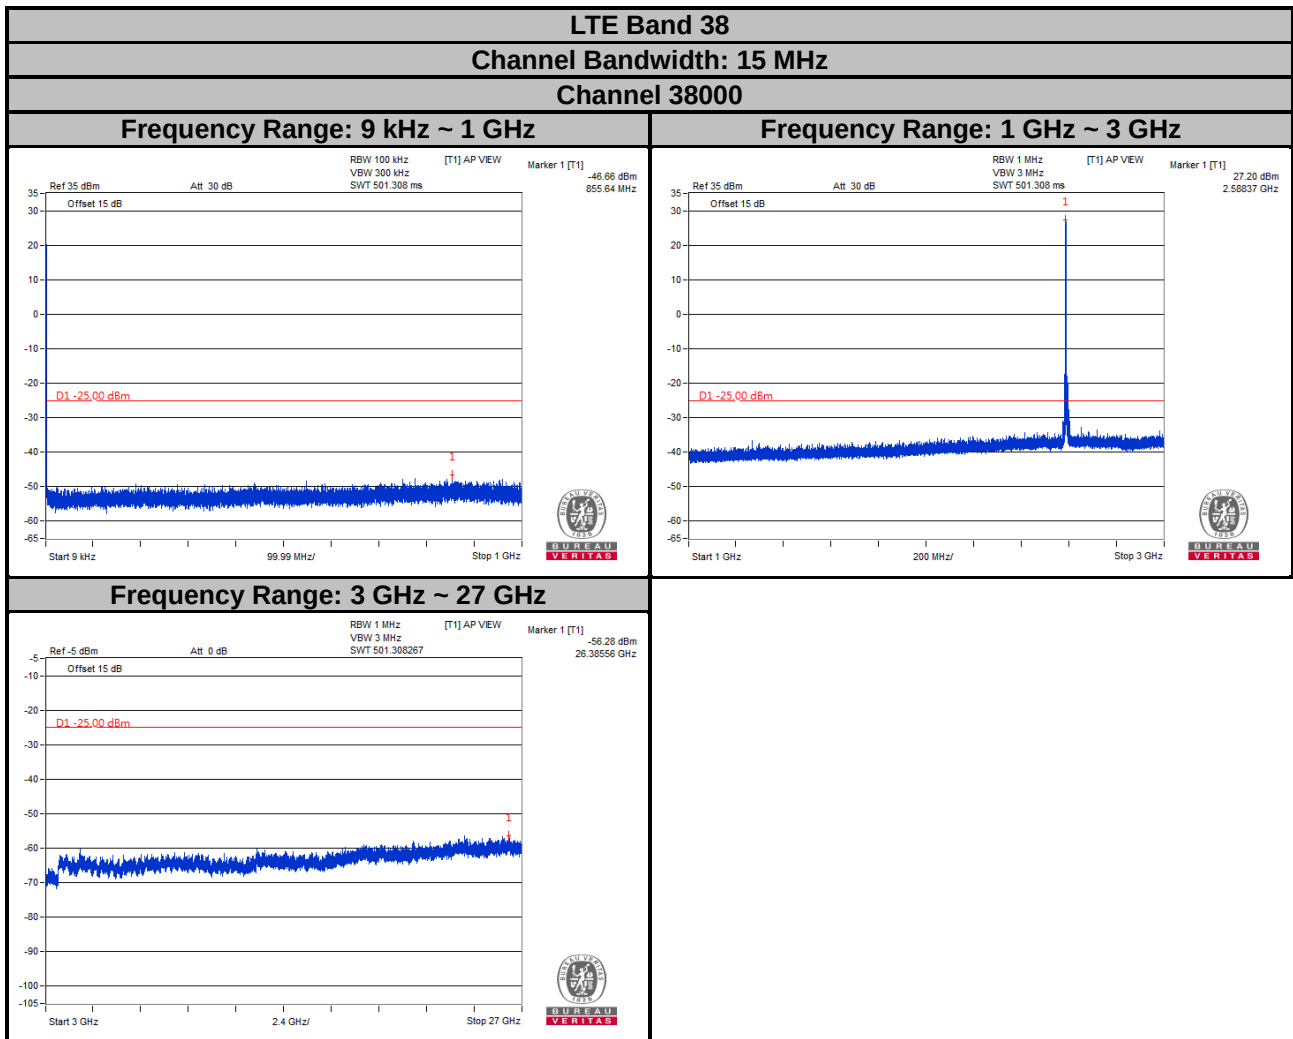

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

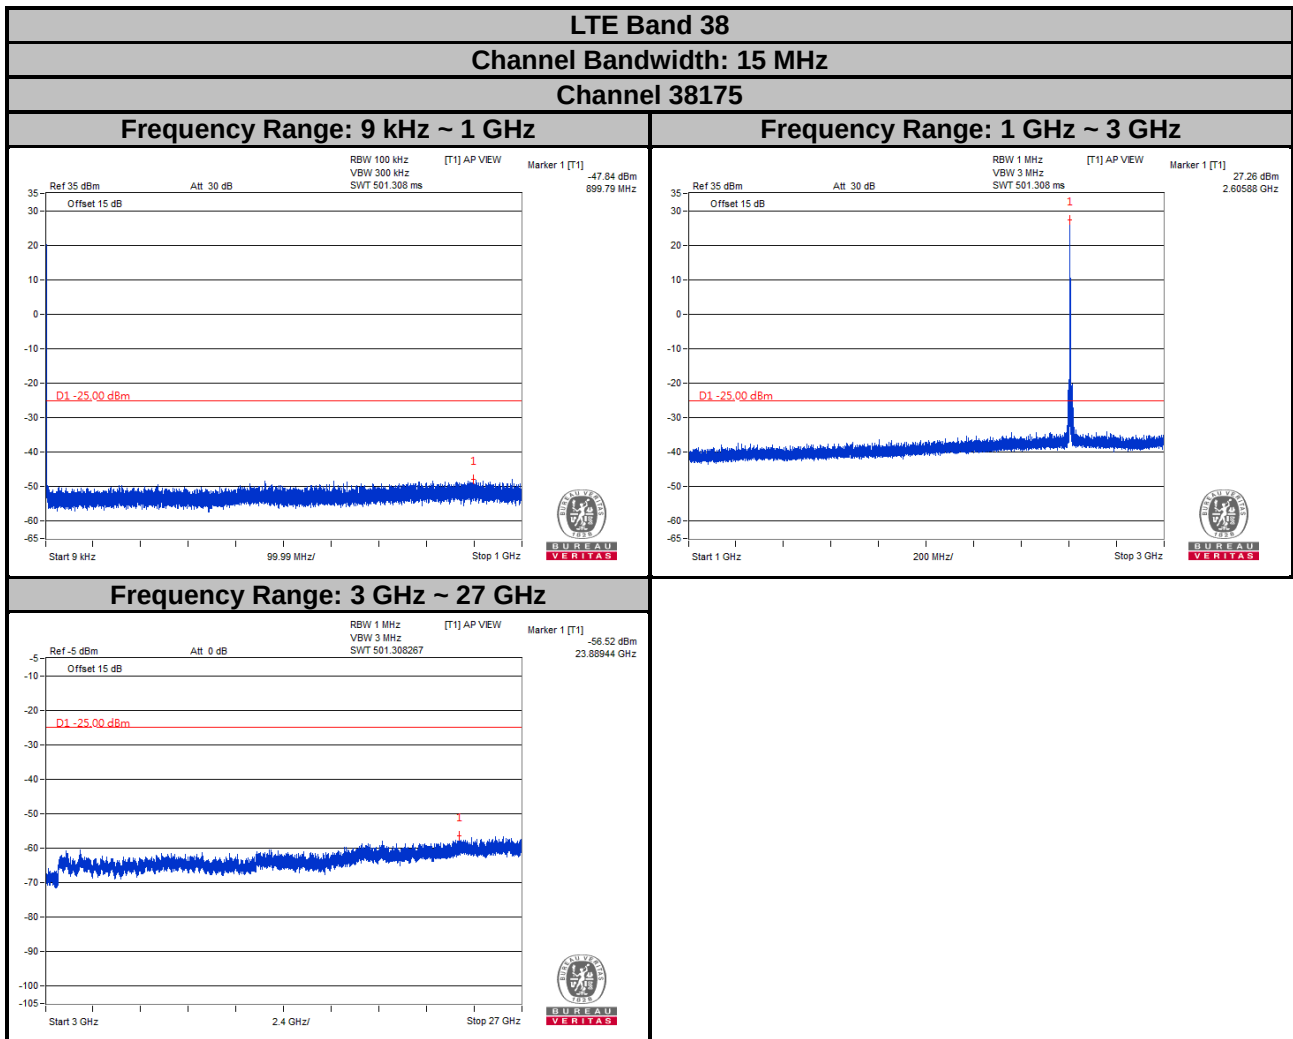


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 38


Channel Bandwidth: 20 MHz

Channel 37850


Frequency Range: 9 kHz ~ 1 GHz

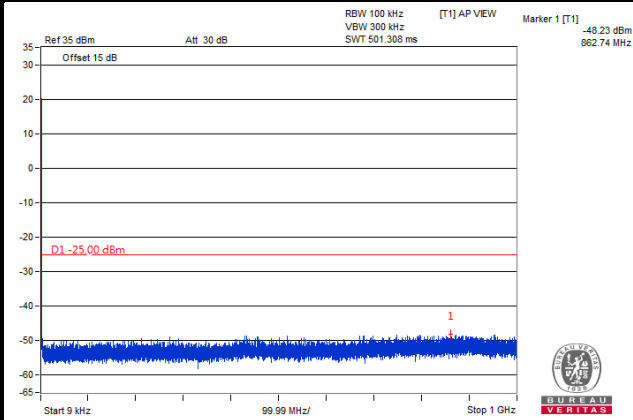


Frequency Range: 1 GHz ~ 3 GHz

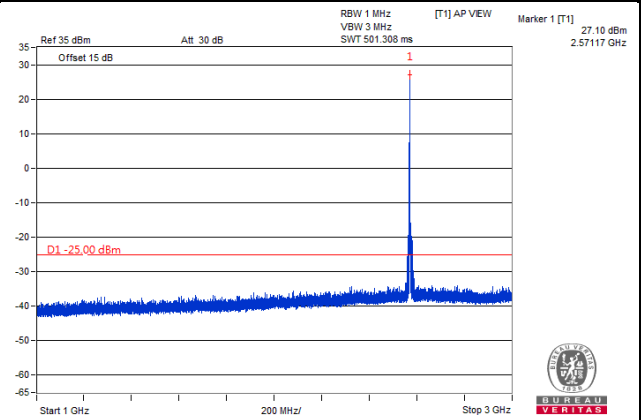


Frequency Range: 3 GHz ~ 27 GHz

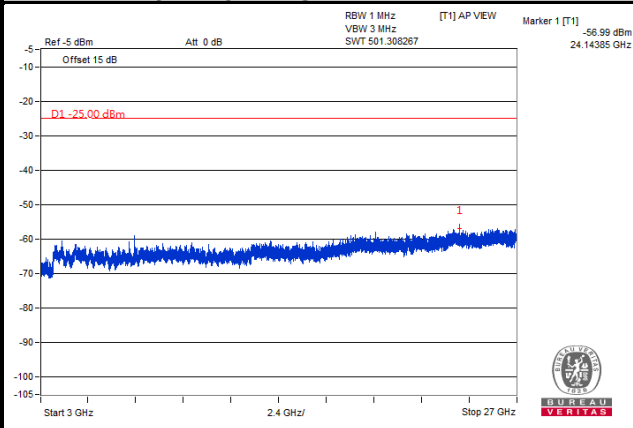

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

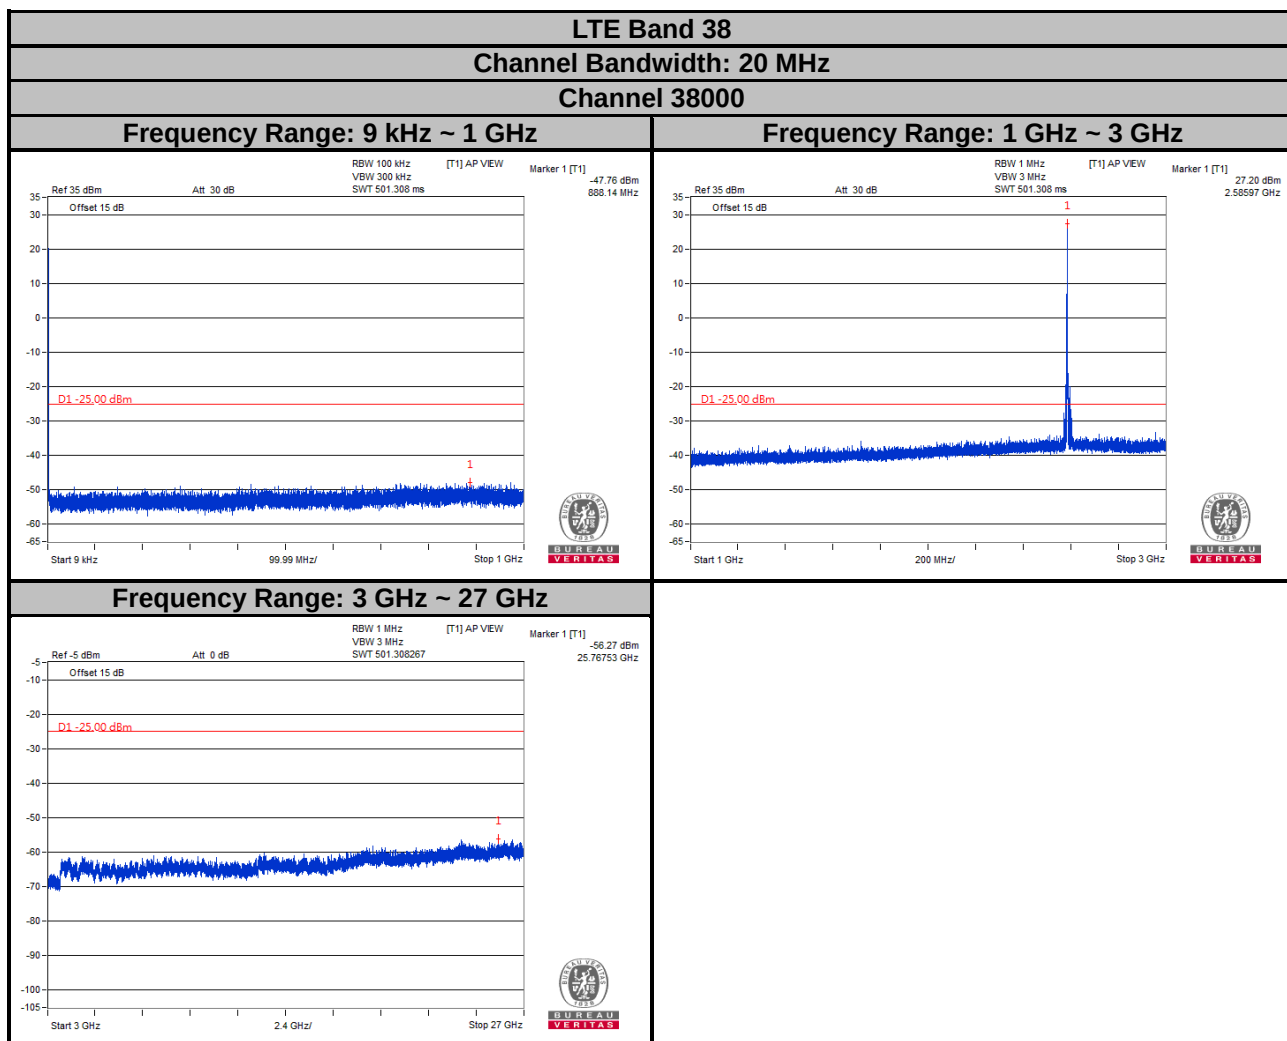

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

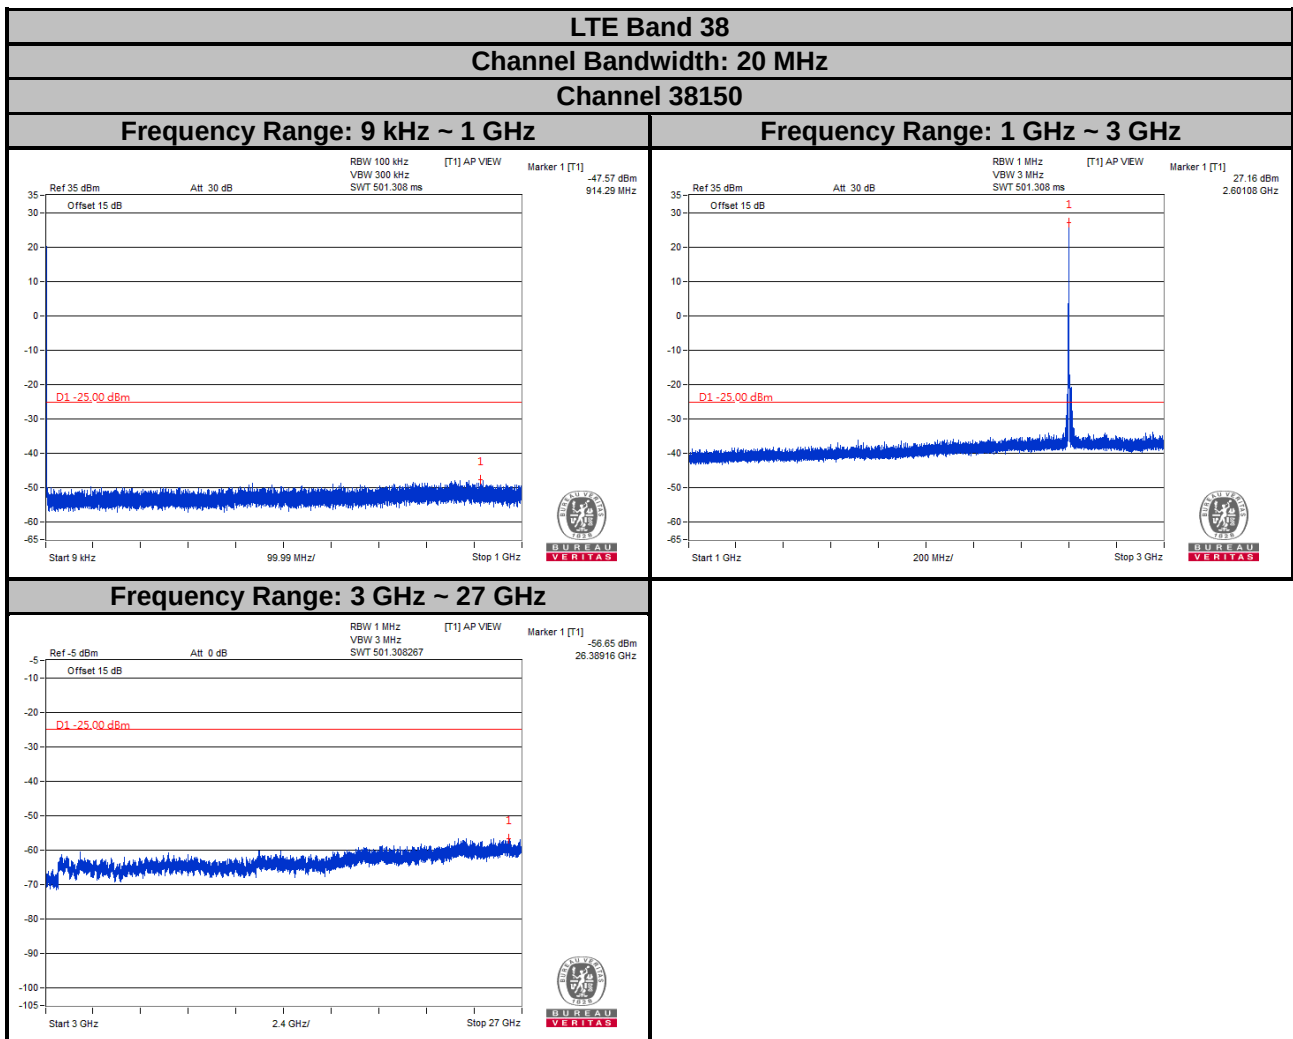


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 41


Channel Bandwidth: 5 MHz

Channel 39675


Frequency Range: 9 kHz ~ 1 GHz

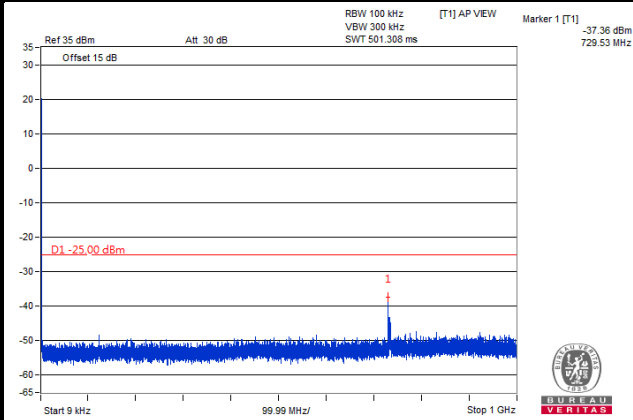


Frequency Range: 1 GHz ~ 3 GHz

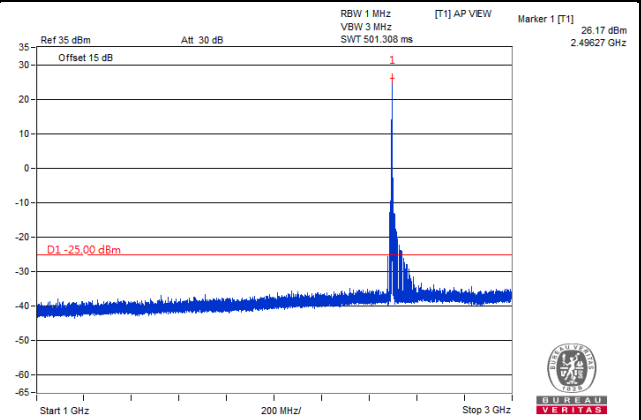


Frequency Range: 3 GHz ~ 27 GHz

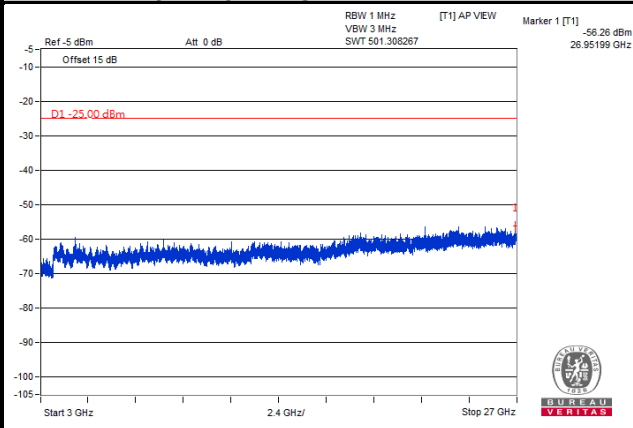


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

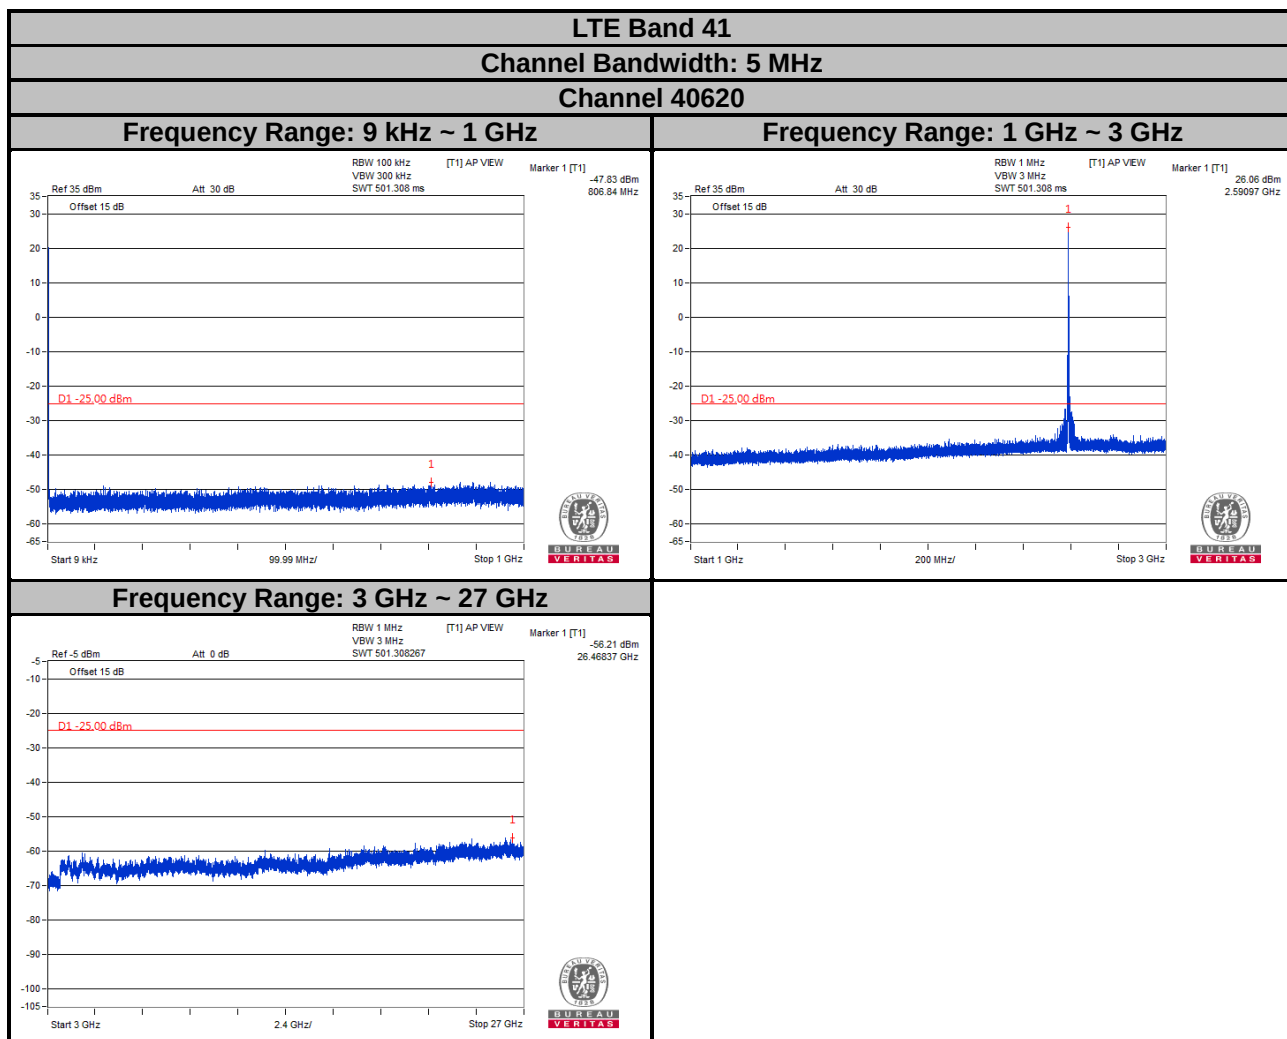

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

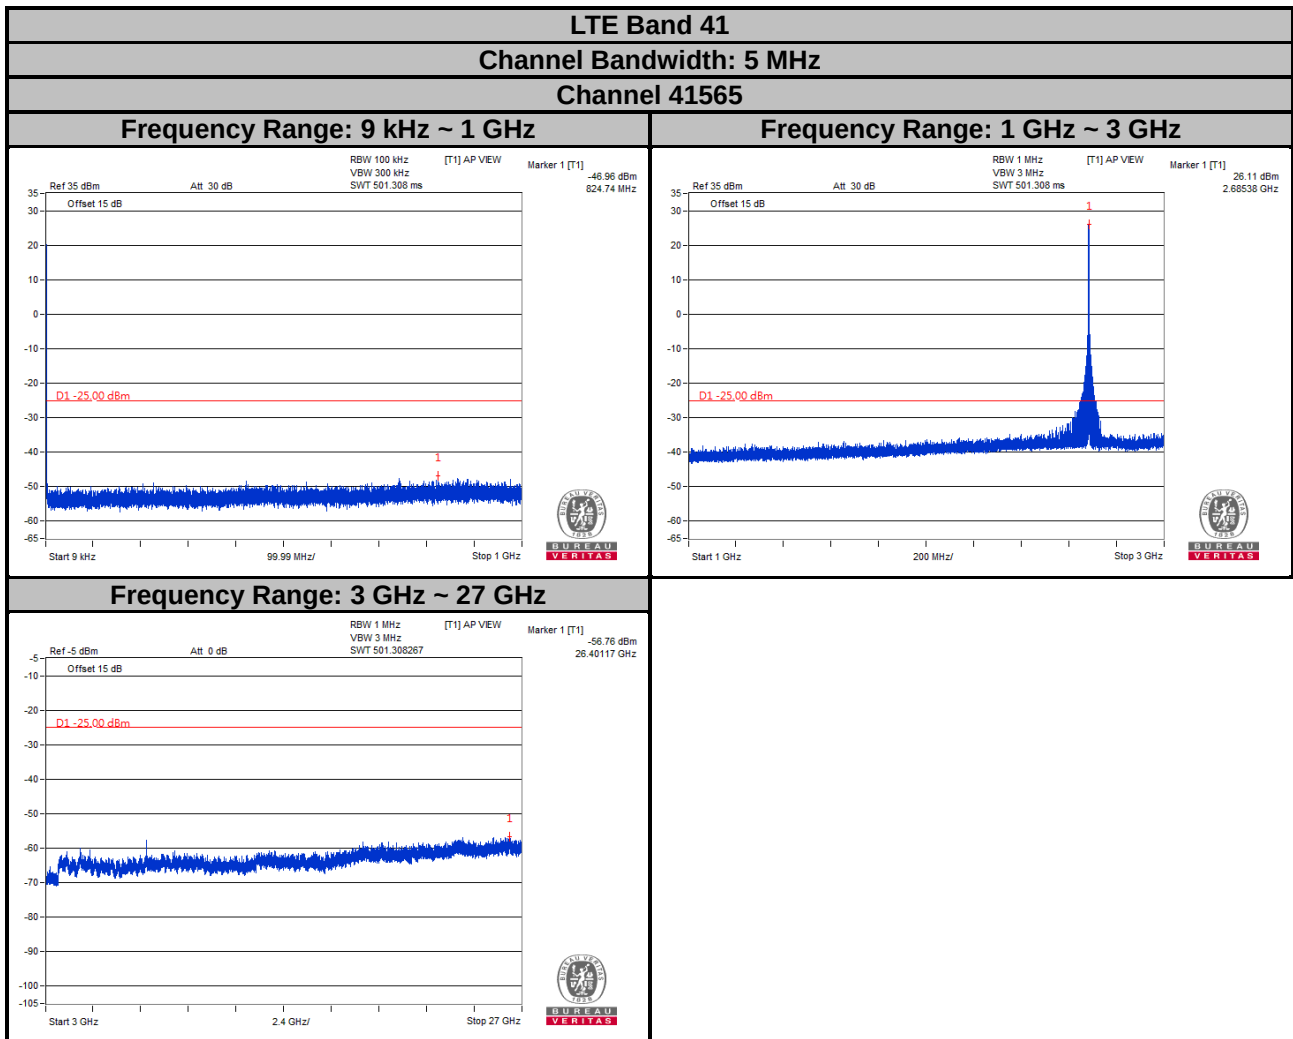

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

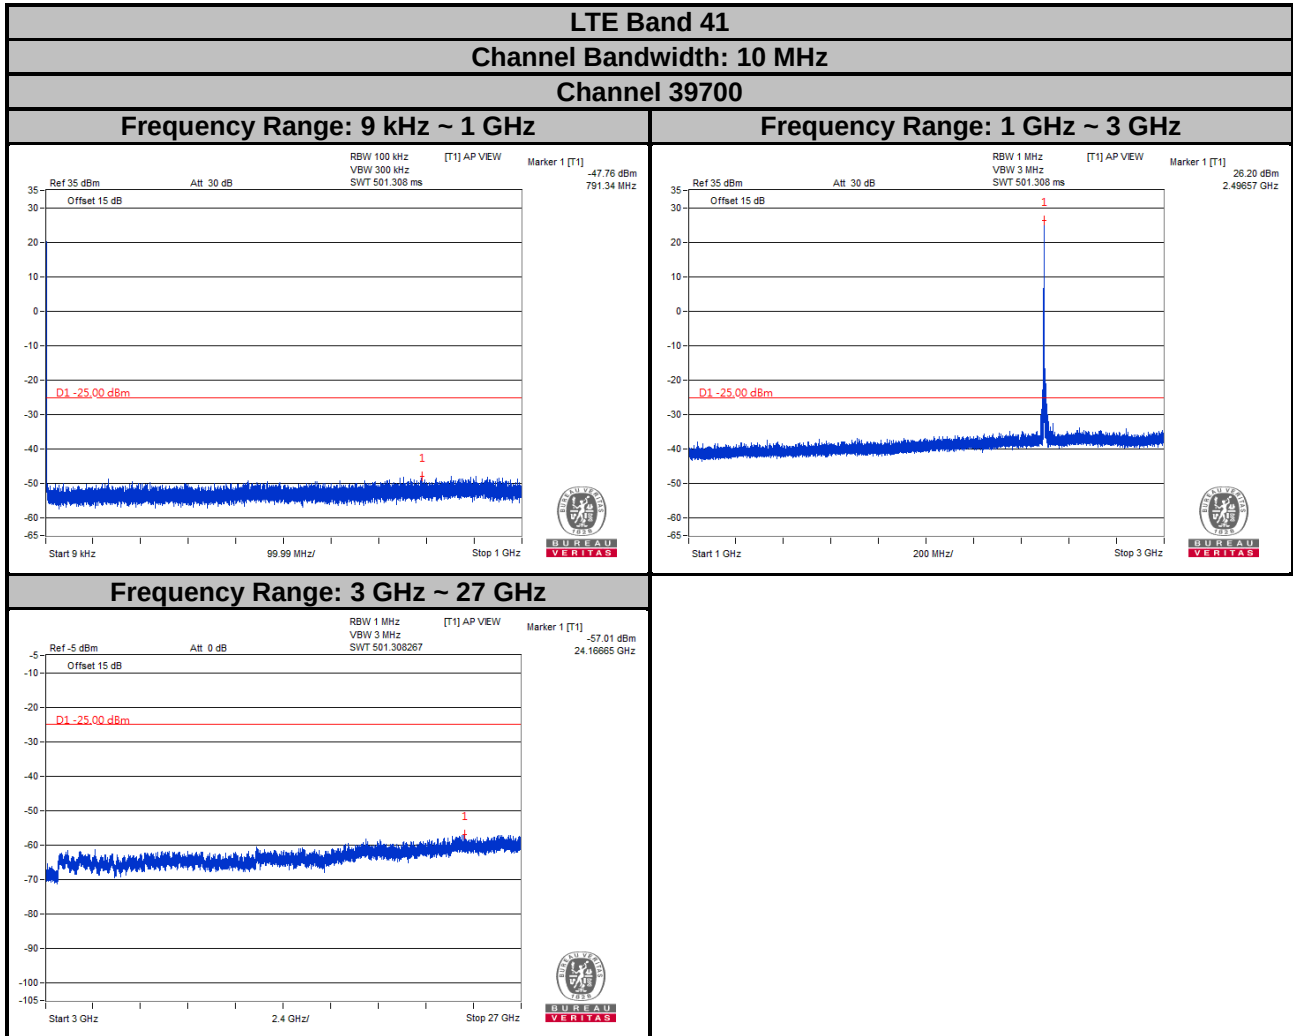


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 41


Channel Bandwidth: 10 MHz

Channel 40620


Frequency Range: 9 kHz ~ 1 GHz

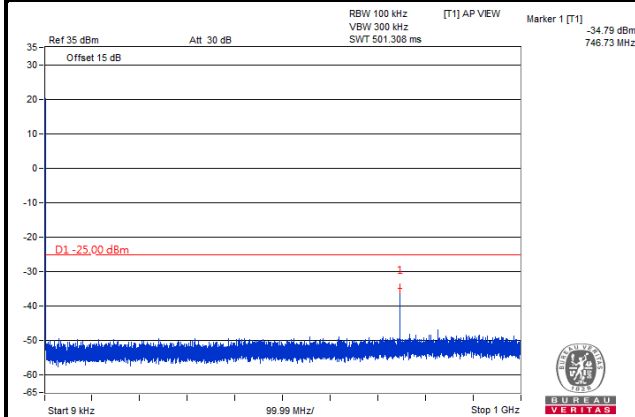


Frequency Range: 1 GHz ~ 3 GHz

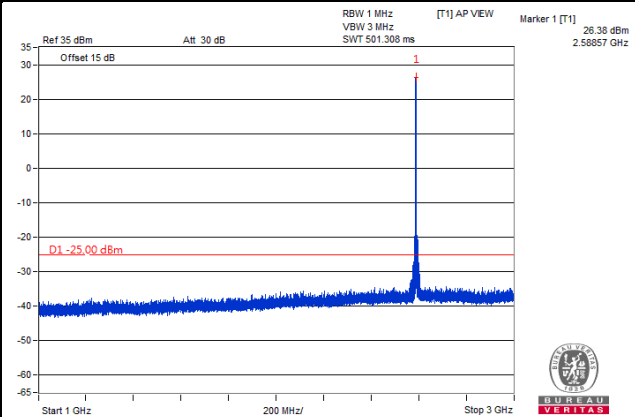

Frequency Range: 3 GHz ~ 27 GHz

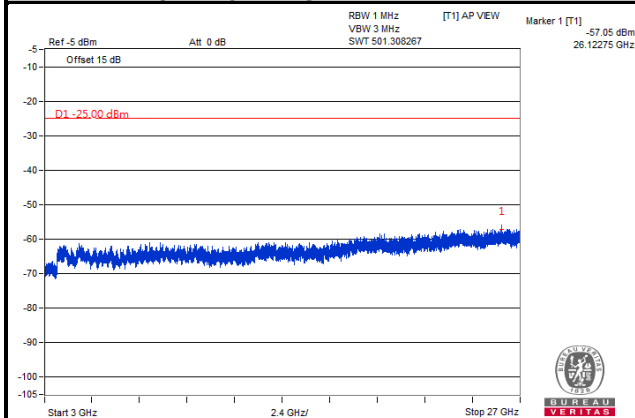

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

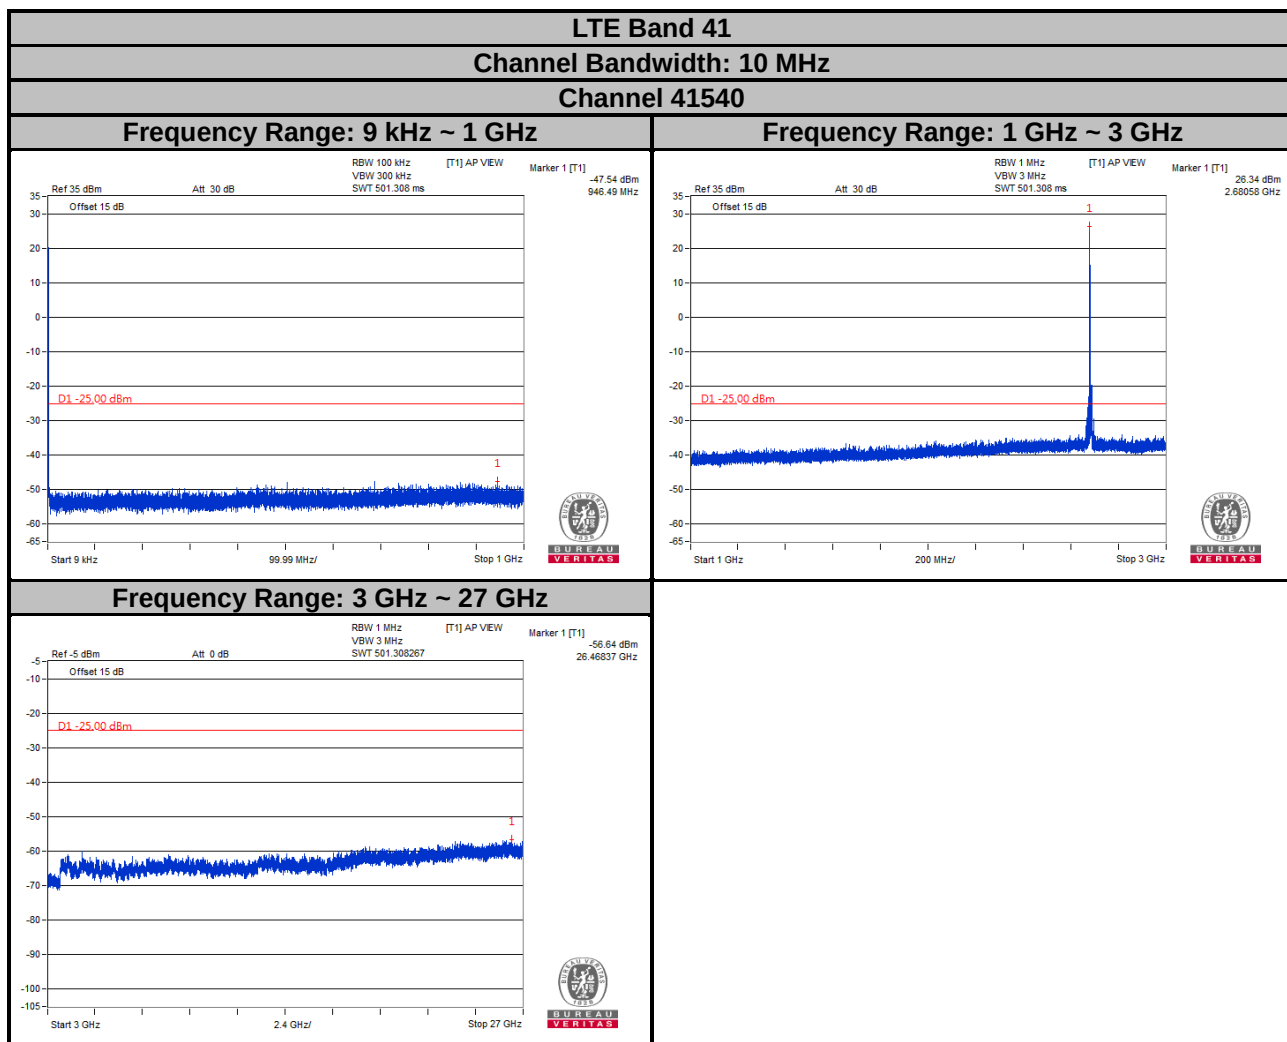


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 41


Channel Bandwidth: 15 MHz

Channel 39725


Frequency Range: 9 kHz ~ 1 GHz

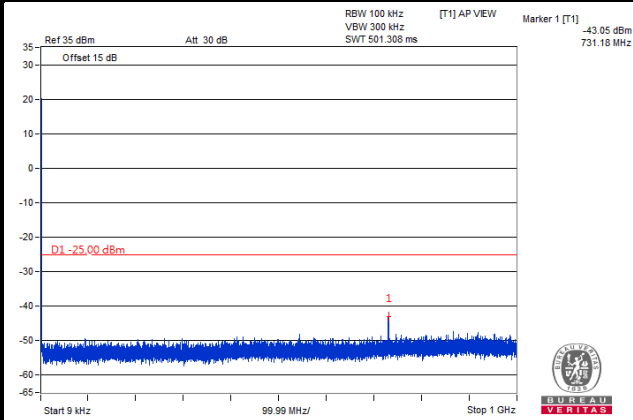

Frequency Range: 1 GHz ~ 3 GHz

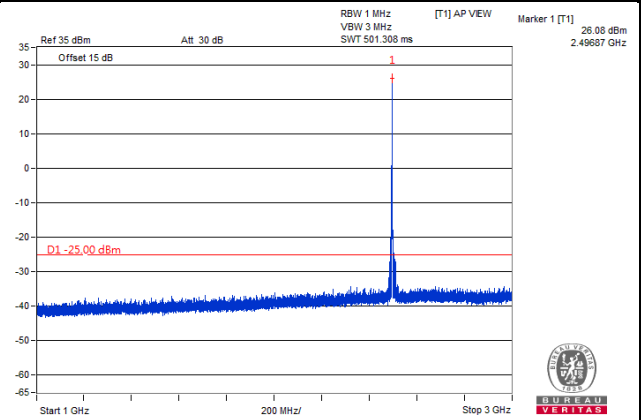

Frequency Range: 3 GHz ~ 27 GHz

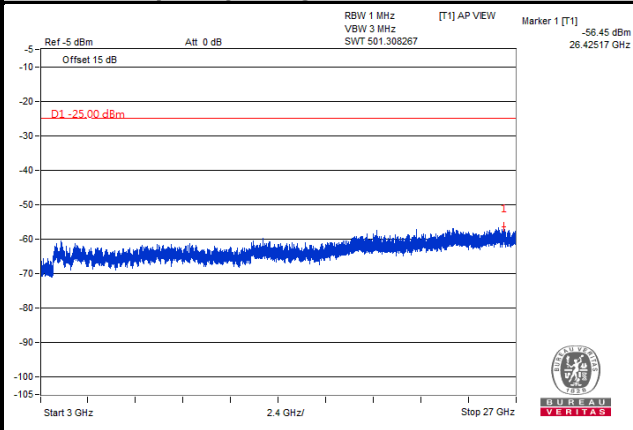


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 41


Channel Bandwidth: 15 MHz

Channel 40620


Frequency Range: 9 kHz ~ 1 GHz

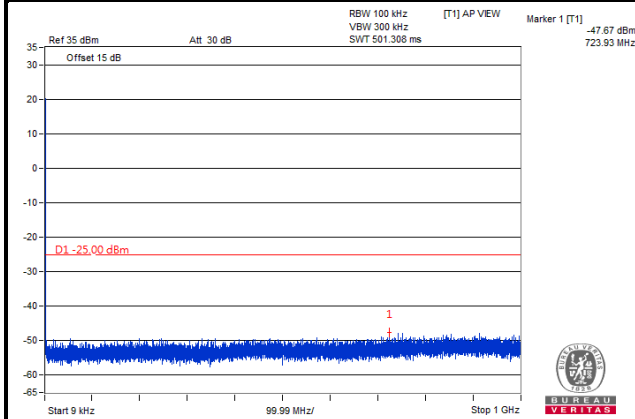


Frequency Range: 1 GHz ~ 3 GHz

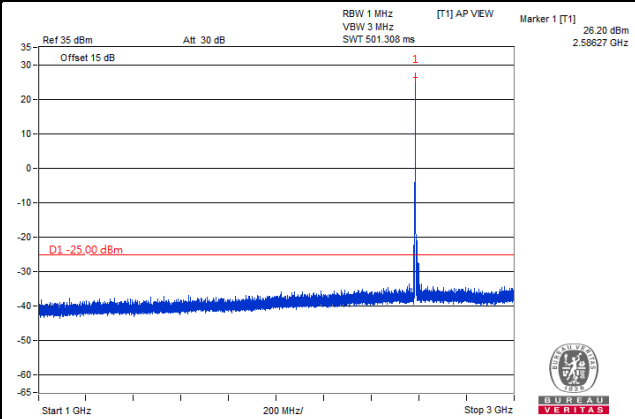


Frequency Range: 3 GHz ~ 27 GHz

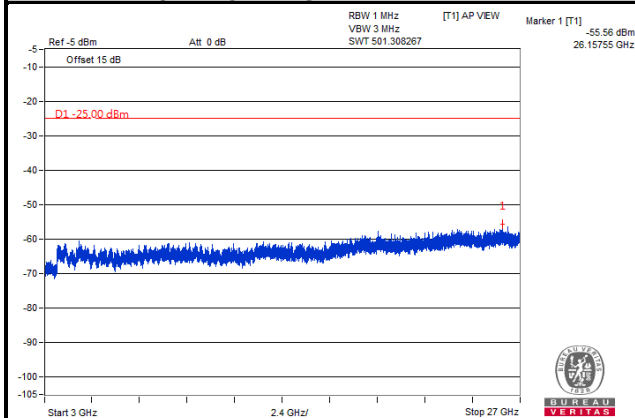


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

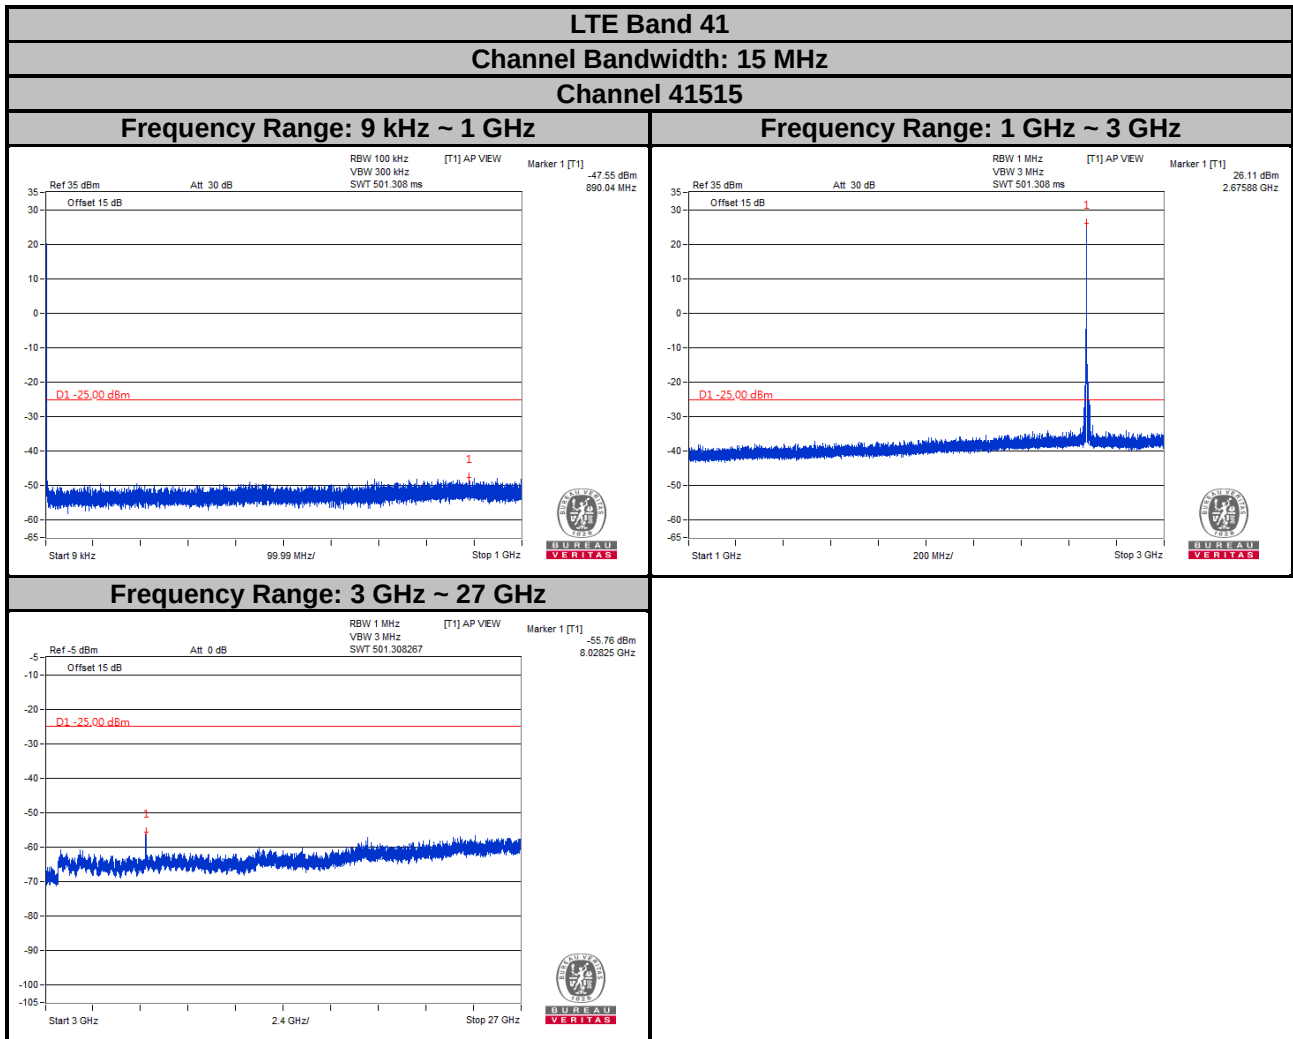


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

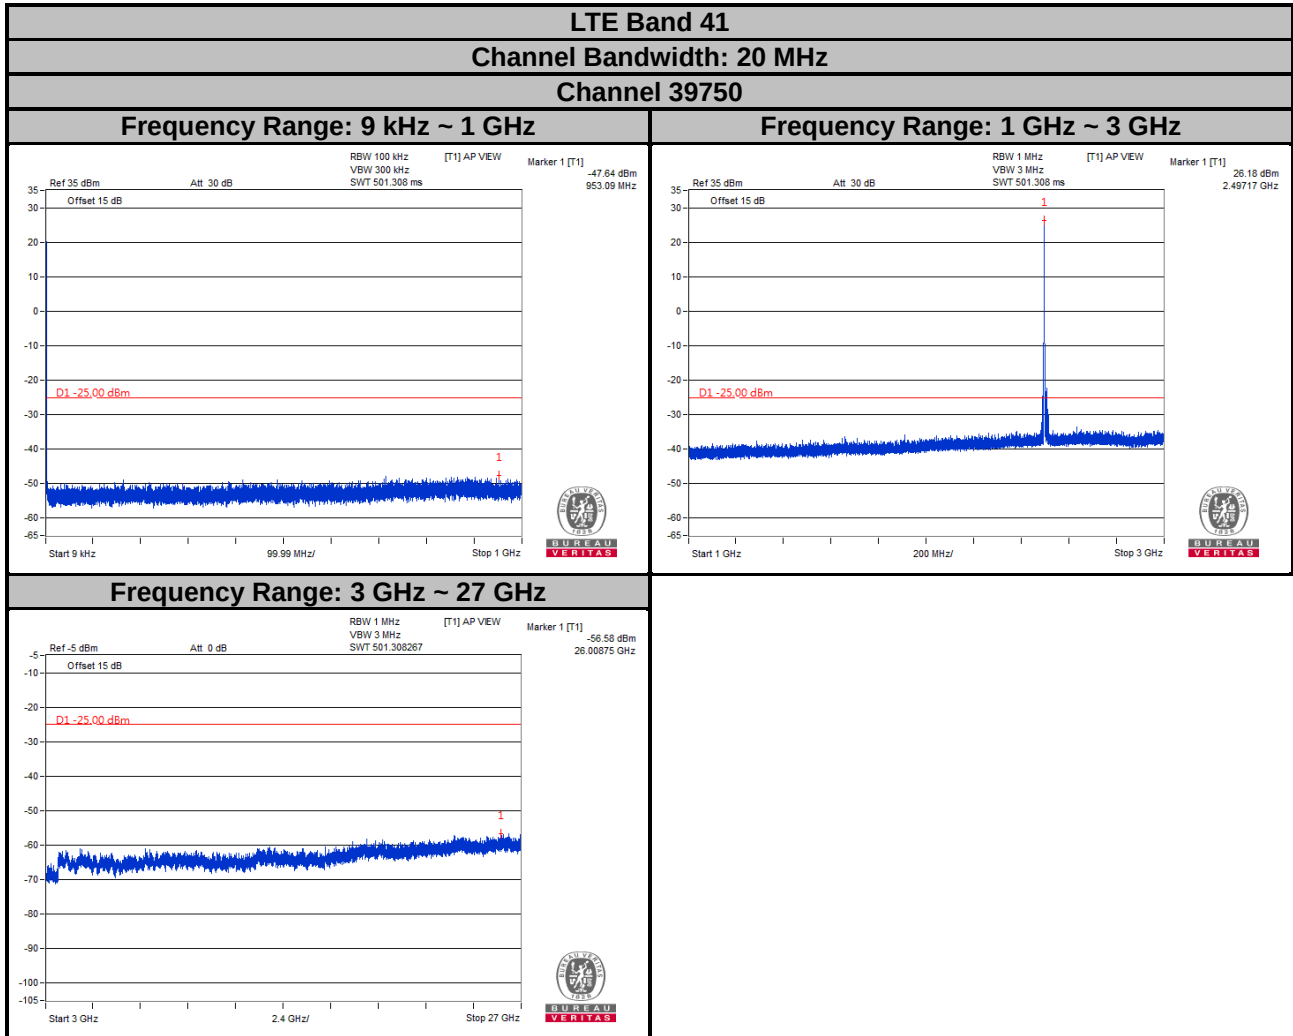

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

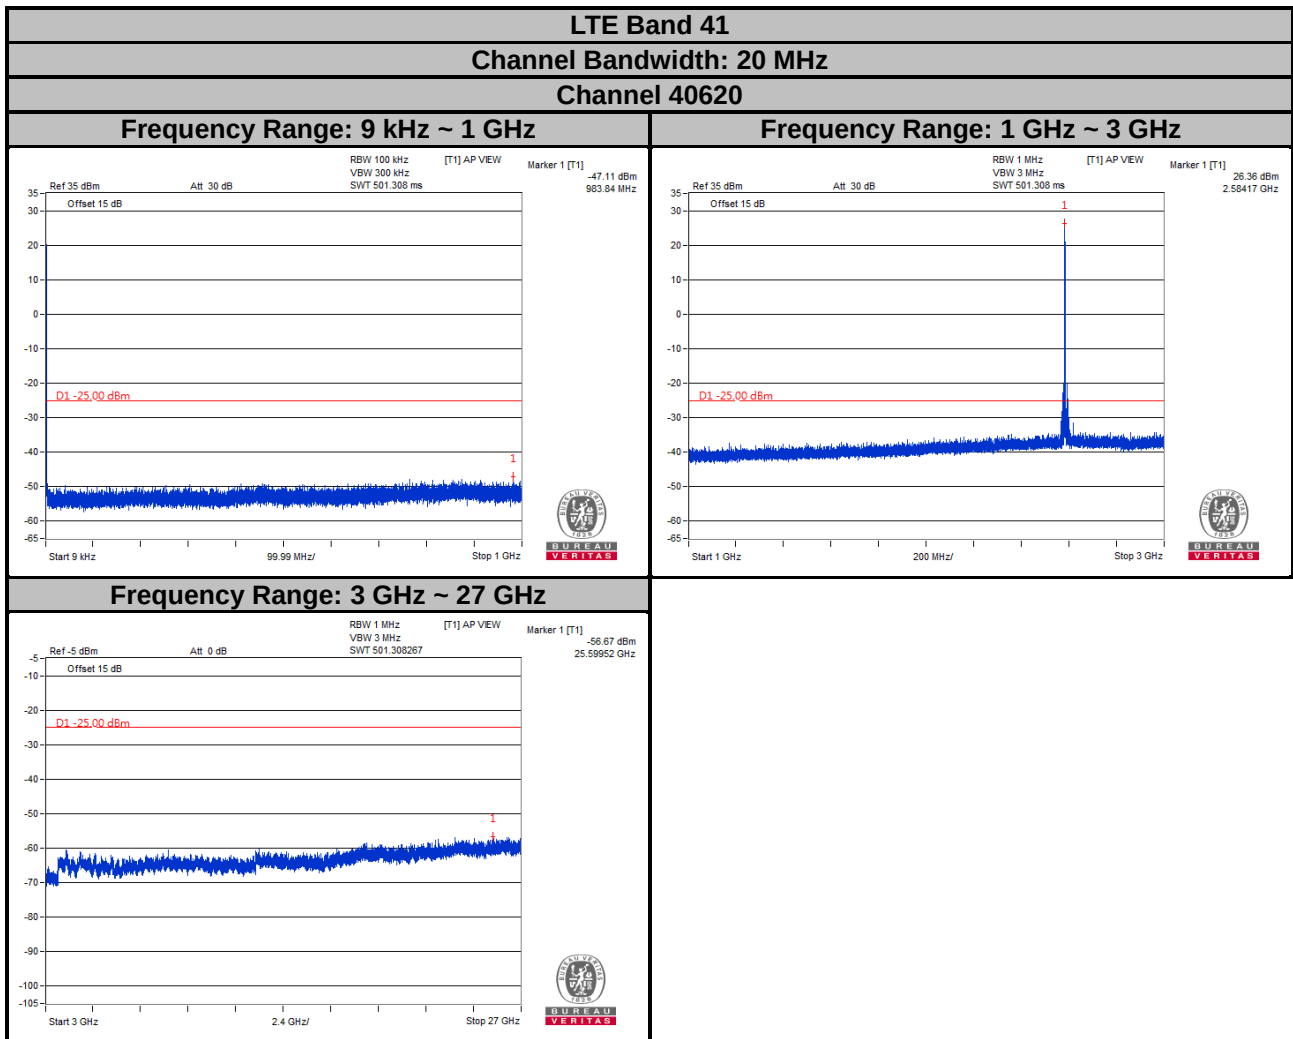

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

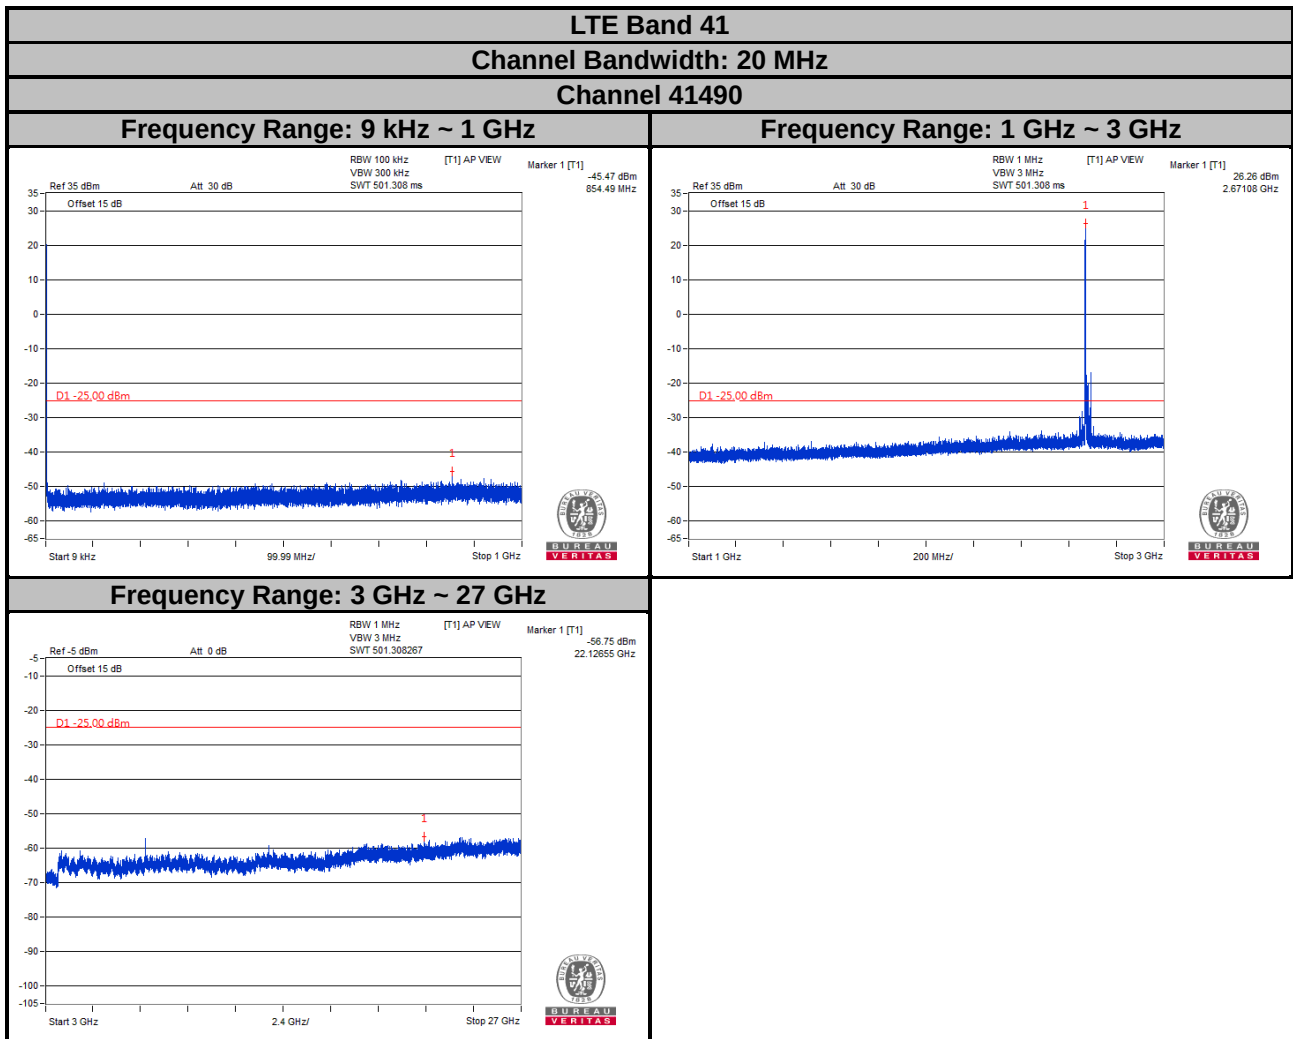

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The limit of emission is equal to -25 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

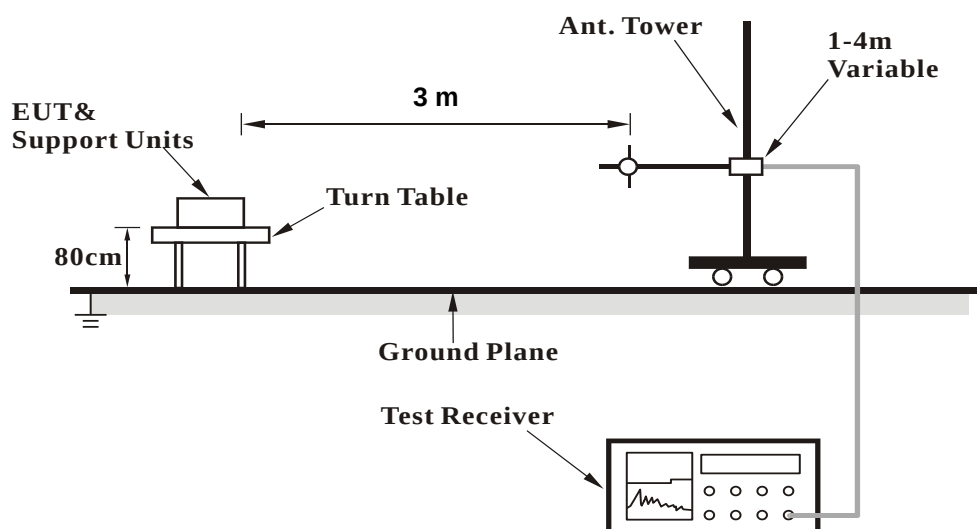

<Radiated Emission above 1 GHz>

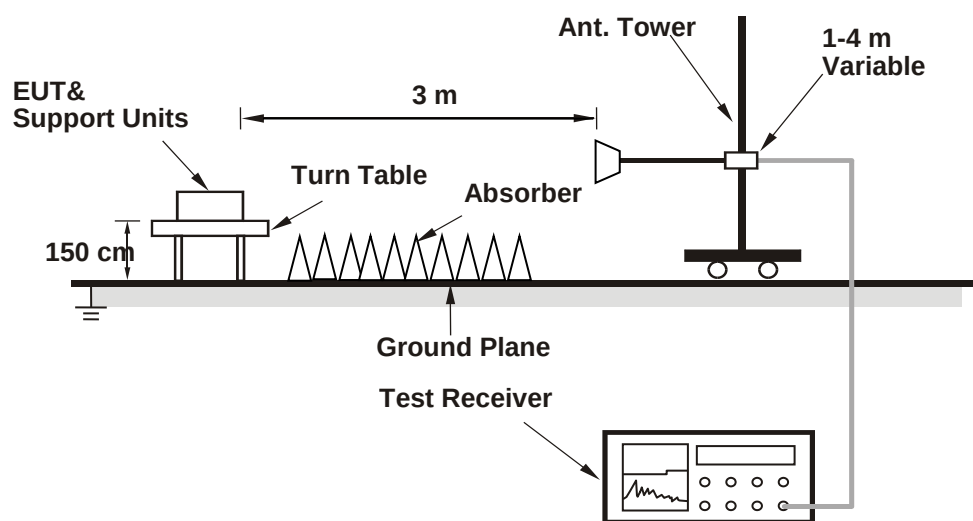

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 7

Channel Bandwidth: 5 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

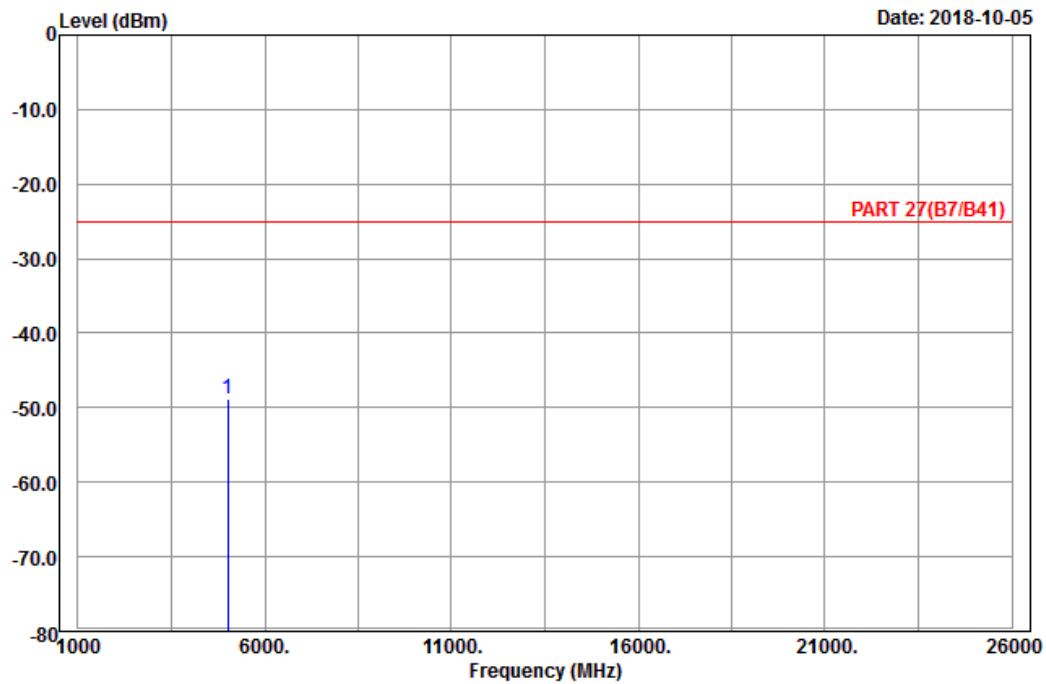

Site : 966 chamber 1

Condition: PART 27(B7/B41) Horizontal

Remark : LTE_Band 7_Link_CH20775

Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5005.00	-48.93	-68.51	-25.00	-23.93	19.58	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-05

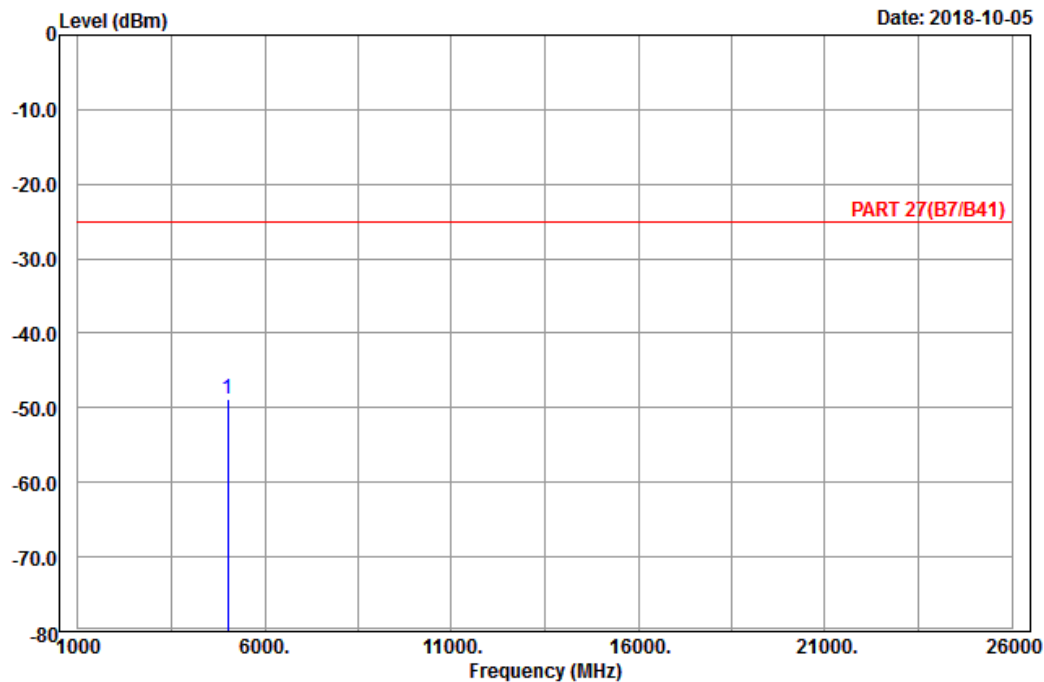

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_CH20775
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 5005.00 -48.85 -68.43 -25.00 -23.85 19.58 Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

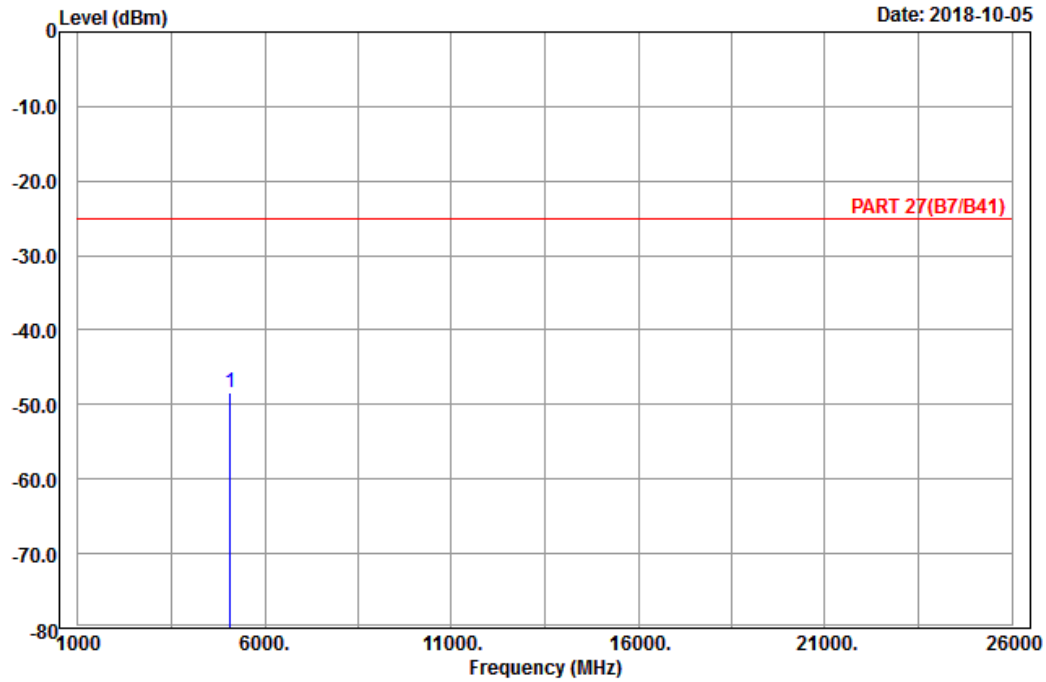

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_CH21100
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5070.00	-48.30	-67.69	-25.00	-23.30	19.39	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-05

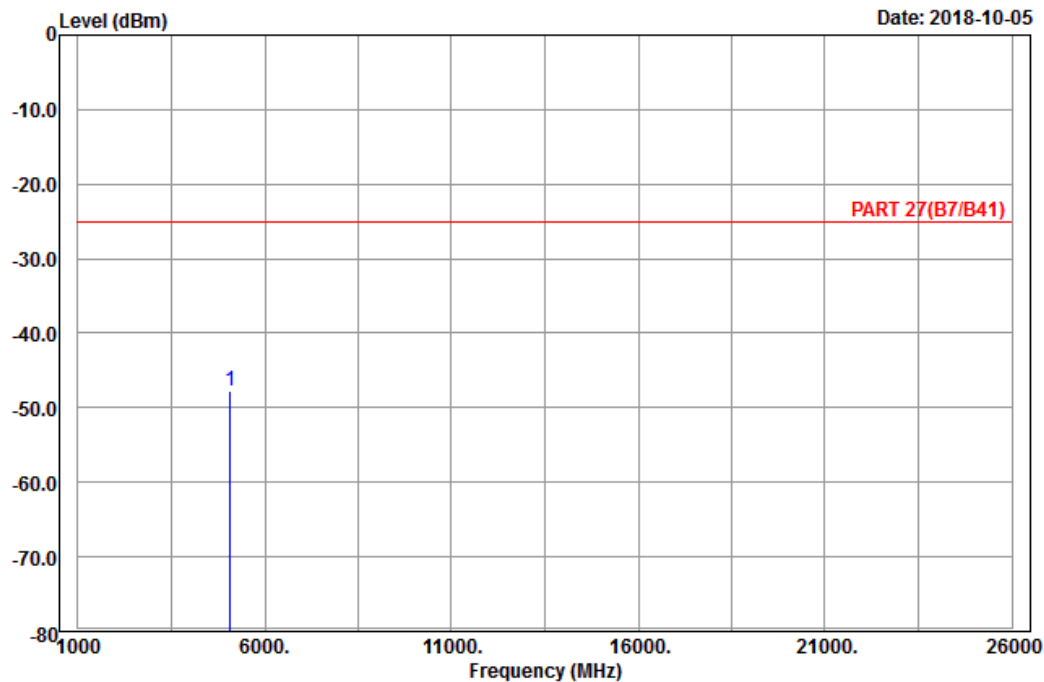

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_CH21100
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5070.00	-47.82	-67.21	-25.00	-22.82	19.39	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

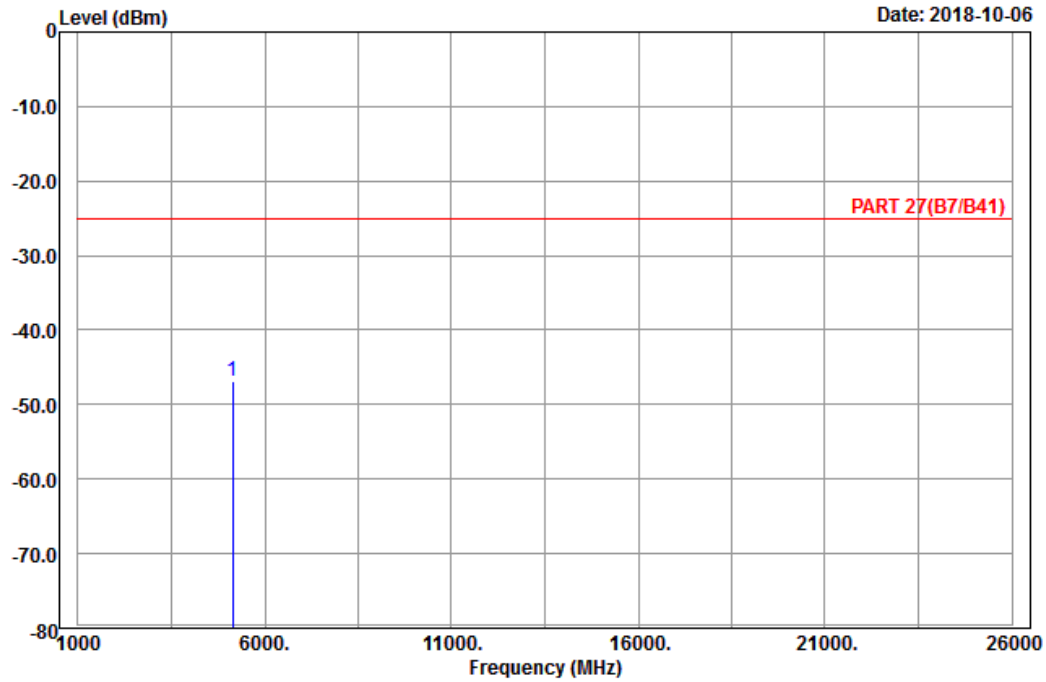

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_CH21425
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5135.00	-46.95	-66.76	-25.00	-21.95	19.81	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-06

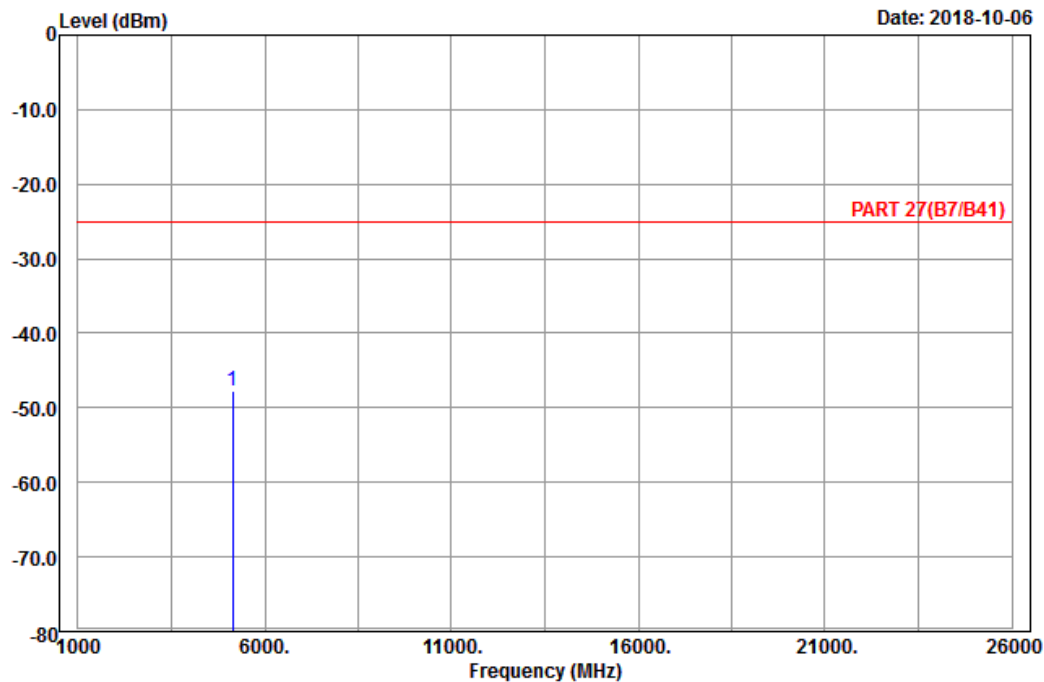

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 7_Link_CH21425
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 5135.00 -47.70 -67.51 -25.00 -22.70 19.81 Peak

Channel Bandwidth: 20 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-10-05

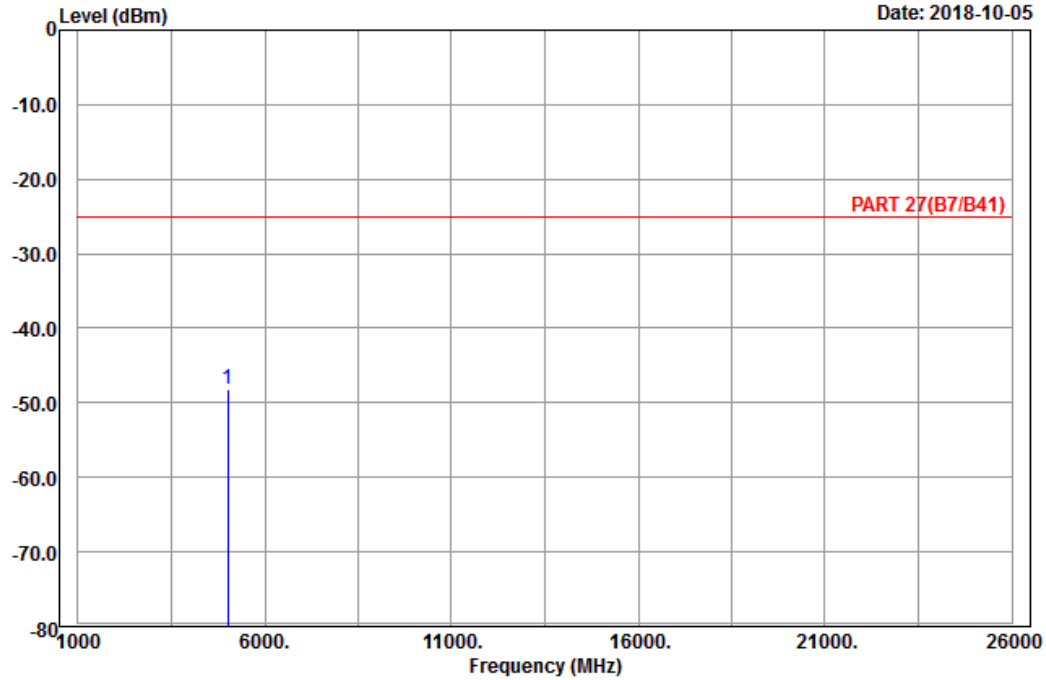

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_CH20850
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5020.00	-48.15	-67.23	-25.00	-23.15	19.08	Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 10

Date: 2018-10-05

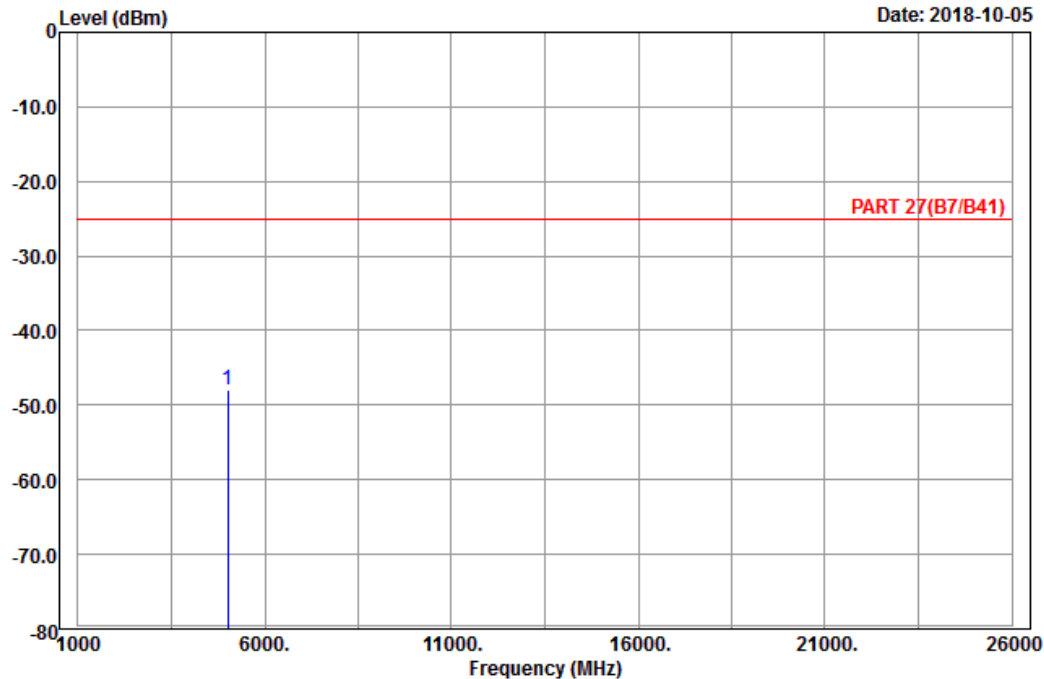

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_CH20850
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 5020.00 -47.94 -67.02 -25.00 -22.94 19.08 Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

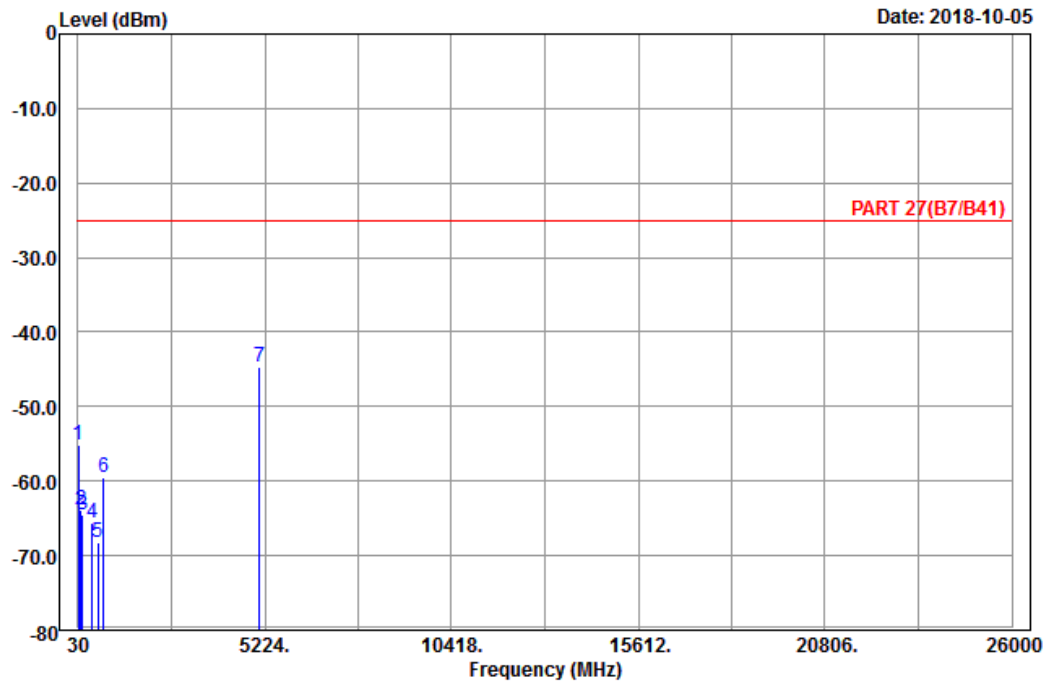

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 7_Link_CH21100
 Tested by: Karl Lee

		Read	Limit	Over			
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	52.14	-55.15	-41.09	-25.00	-30.15	-14.06	Peak
2	98.85	-63.92	-53.74	-25.00	-38.92	-10.18	Peak
3	145.29	-64.60	-56.77	-25.00	-39.60	-7.83	Peak
4	423.20	-65.52	-62.27	-25.00	-40.52	-3.25	Peak
5	577.20	-68.24	-67.70	-25.00	-43.24	-0.54	Peak
6	744.50	-59.56	-58.34	-25.00	-34.56	-1.22	Peak
7 pp	5070.00	-44.75	-64.14	-25.00	-19.75	19.39	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2018-10-05

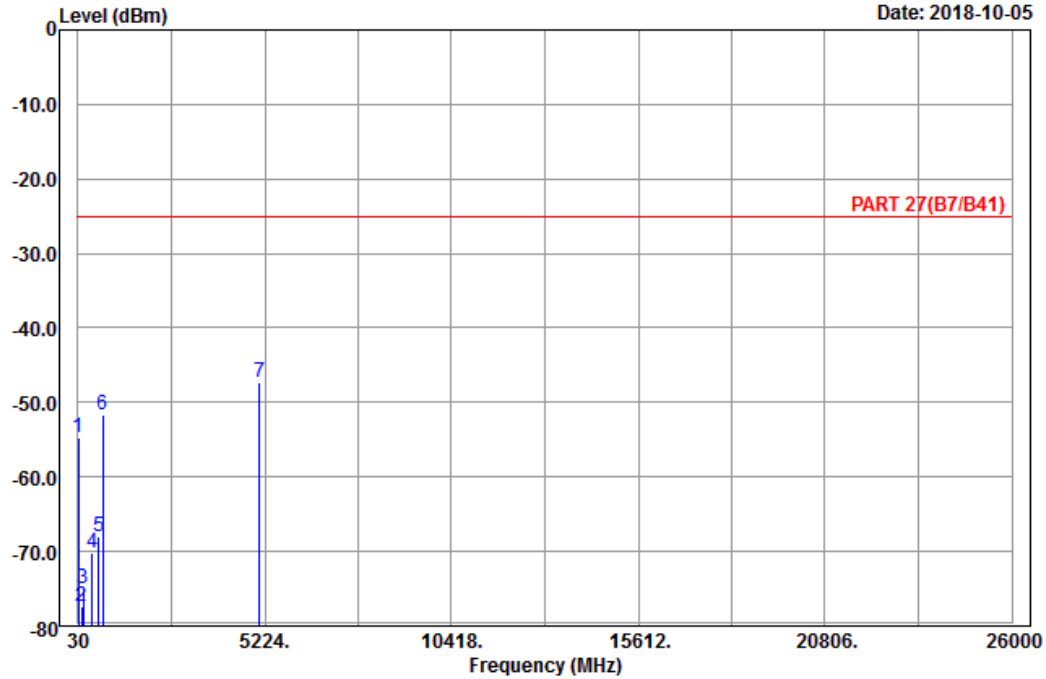

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_CH21100
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	49.98	-54.81	-40.76	-25.00	-29.81	-14.05	Peak
2	136.38	-77.36	-69.68	-25.00	-52.36	-7.68	Peak
3	187.68	-74.91	-69.21	-25.00	-49.91	-5.70	Peak
4	417.60	-70.22	-67.08	-25.00	-45.22	-3.14	Peak
5	600.30	-68.07	-68.50	-25.00	-43.07	0.43	Peak
6	729.80	-51.66	-50.73	-25.00	-26.66	-0.93	Peak
7 pp	5070.00	-47.20	-66.59	-25.00	-22.20	19.39	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

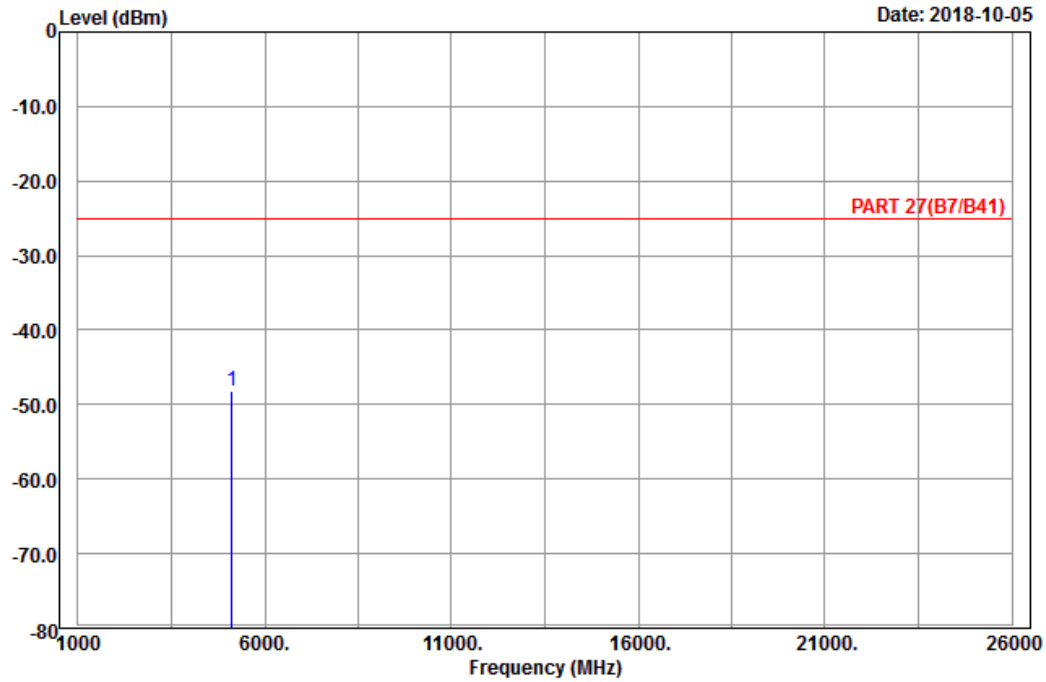

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 7_Link_CH21350
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5120.00	-48.13	-67.84	-25.00	-23.13	19.71	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-05

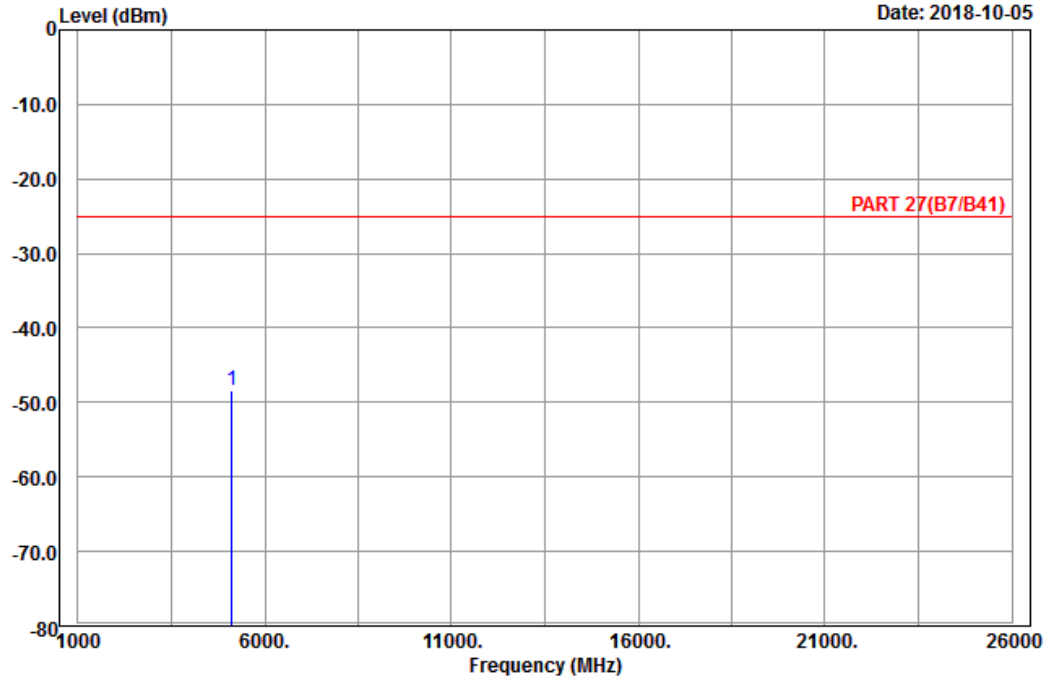

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 7_Link_CH21350
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5120.00	-48.46	-68.17	-25.00	-23.46	19.71	Peak

LTE Band 38
Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-10-09

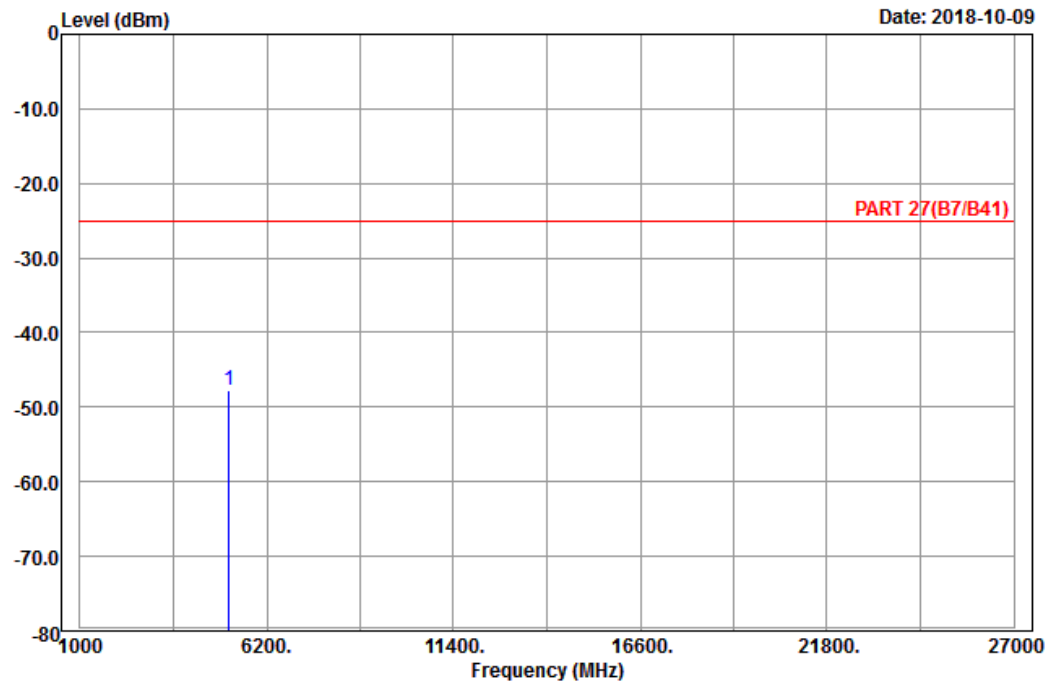

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_CH37775
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5145.00	-47.66	-67.47	-25.00	-22.66	19.81	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

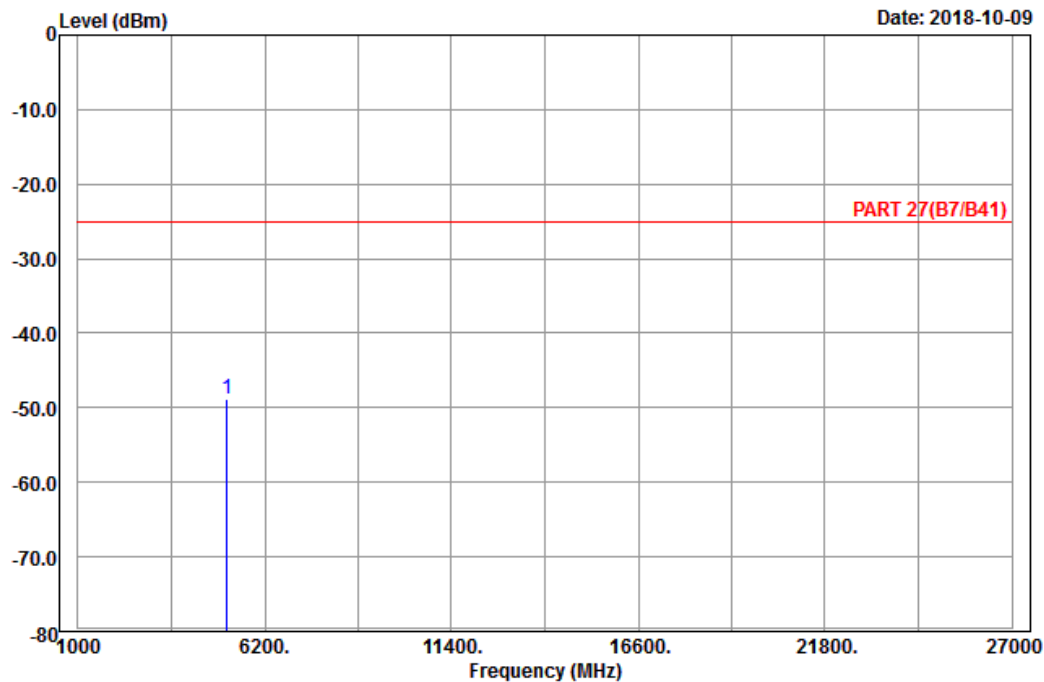

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_CH37775
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5145.00	-48.94	-68.75	-25.00	-23.94	19.81	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

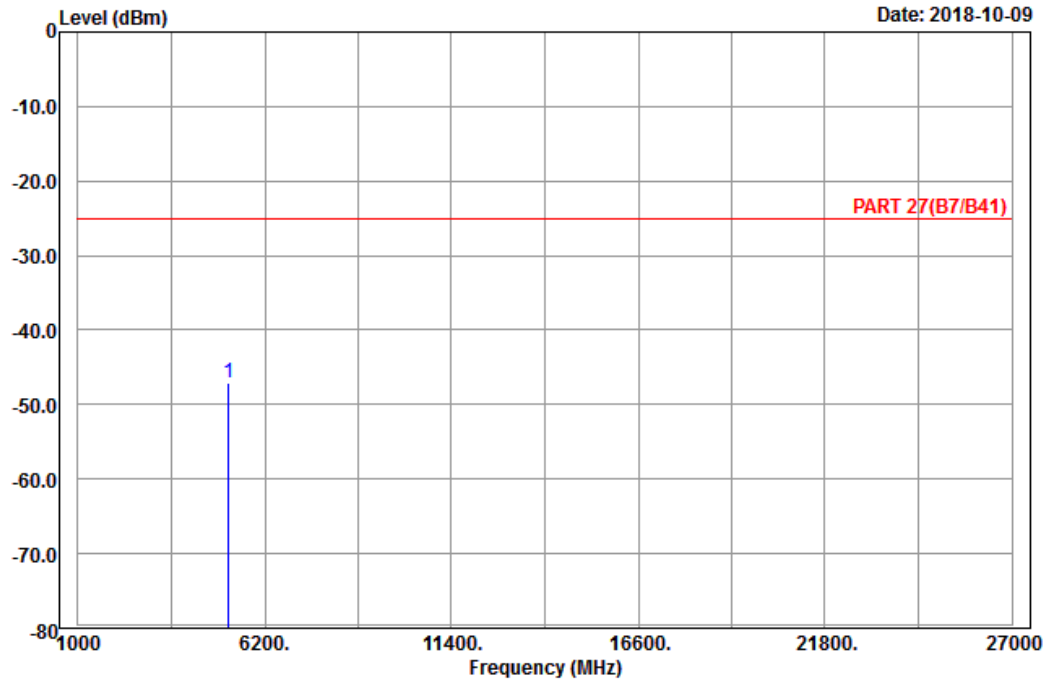

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_CH38000
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5190.00	-47.06	-67.18	-25.00	-22.06	20.12	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

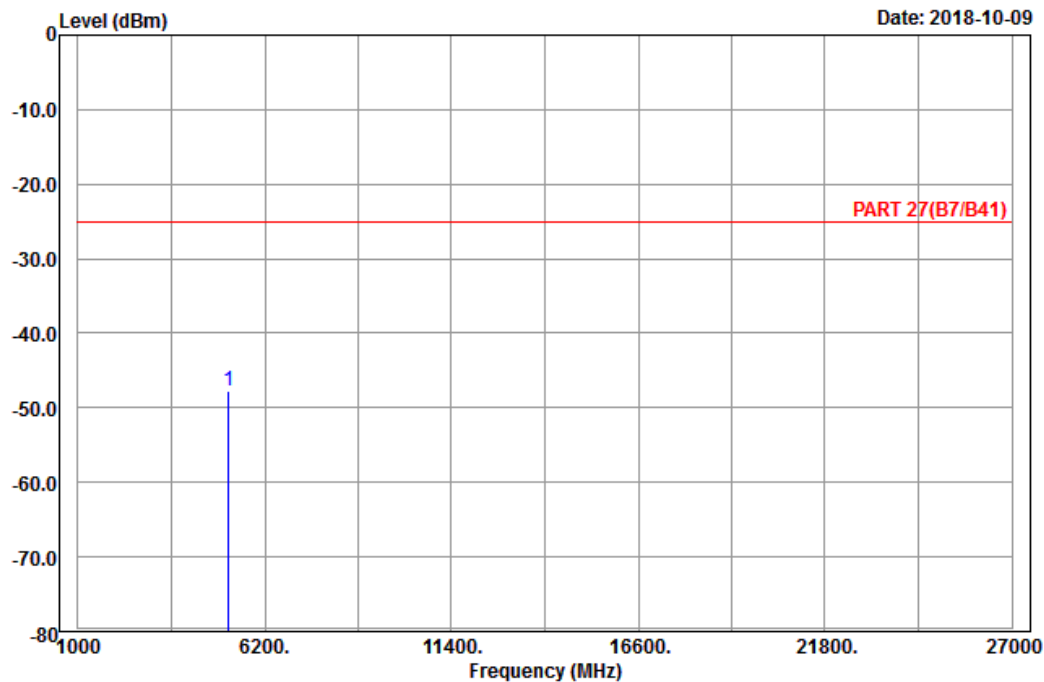

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 38_Link_CH38000
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 5190.00 -47.83 -67.95 -25.00 -22.83 20.12 Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

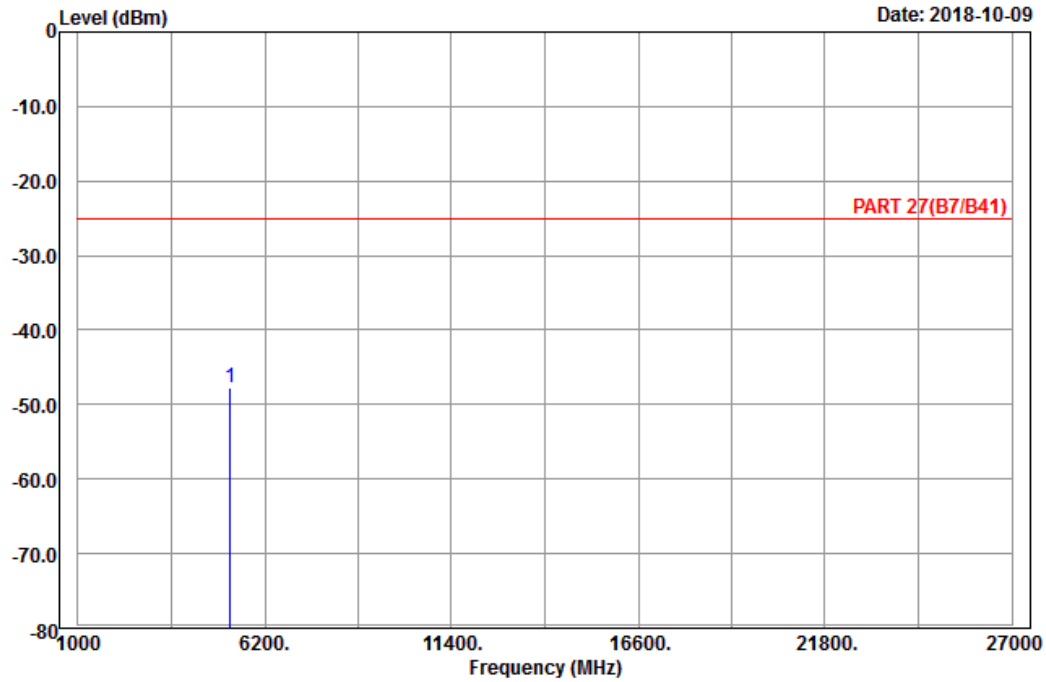

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_CH38225
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5235.00	-47.72	-67.88	-25.00	-22.72	20.16	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

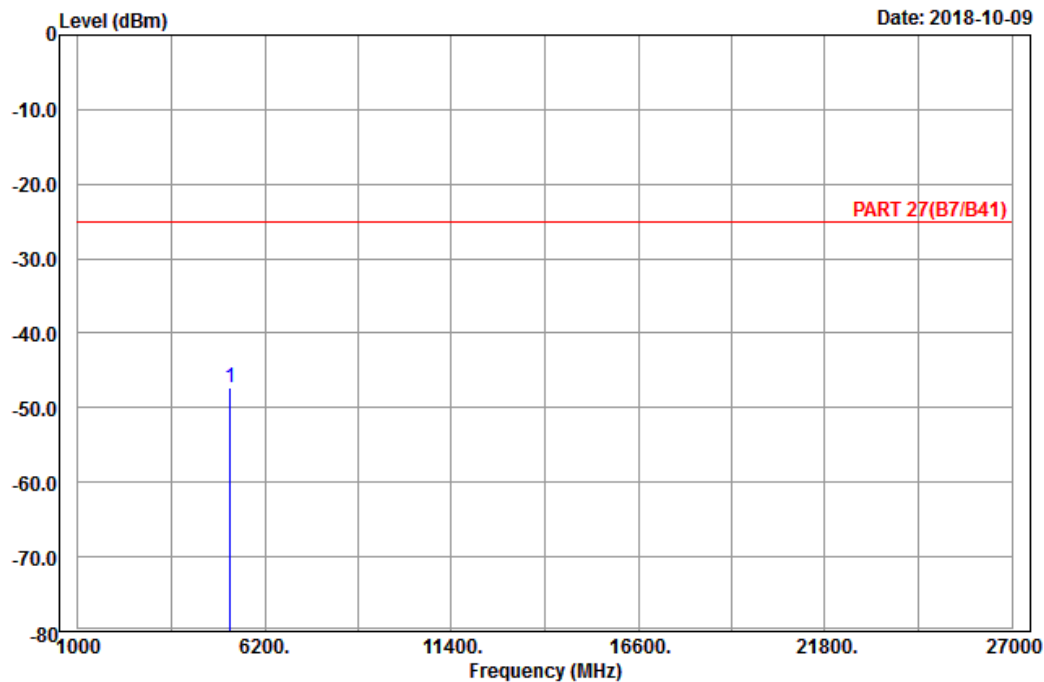

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 38_Link_CH38225
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 5235.00 -47.19 -67.35 -25.00 -22.19 20.16 Peak

Channel Bandwidth: 20 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2018-10-09

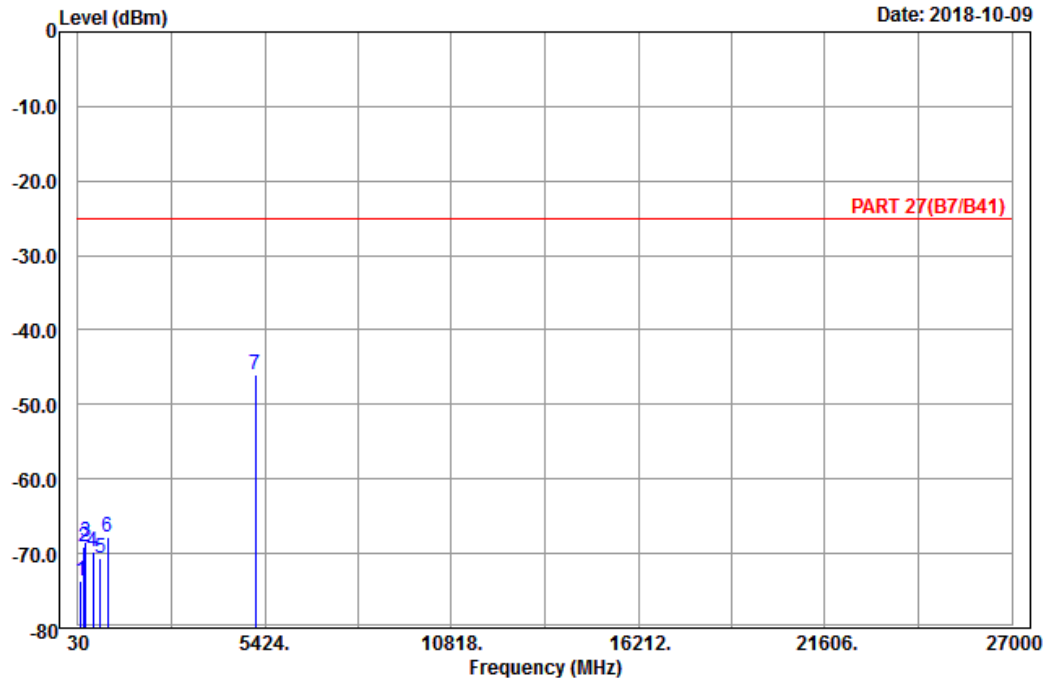

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_CH37850
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	119.91	-73.76	-65.51	-25.00	-48.76	-8.25	Peak
2	209.01	-69.03	-62.98	-25.00	-44.03	-6.05	Peak
3	245.73	-68.49	-62.92	-25.00	-43.49	-5.57	Peak
4	465.90	-69.74	-65.45	-25.00	-44.74	-4.29	Peak
5	675.20	-70.65	-70.39	-25.00	-45.65	-0.26	Peak
6	894.30	-67.84	-70.56	-25.00	-42.84	2.72	Peak
7 pp	5160.00	-45.97	-65.89	-25.00	-20.97	19.92	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2018-10-09

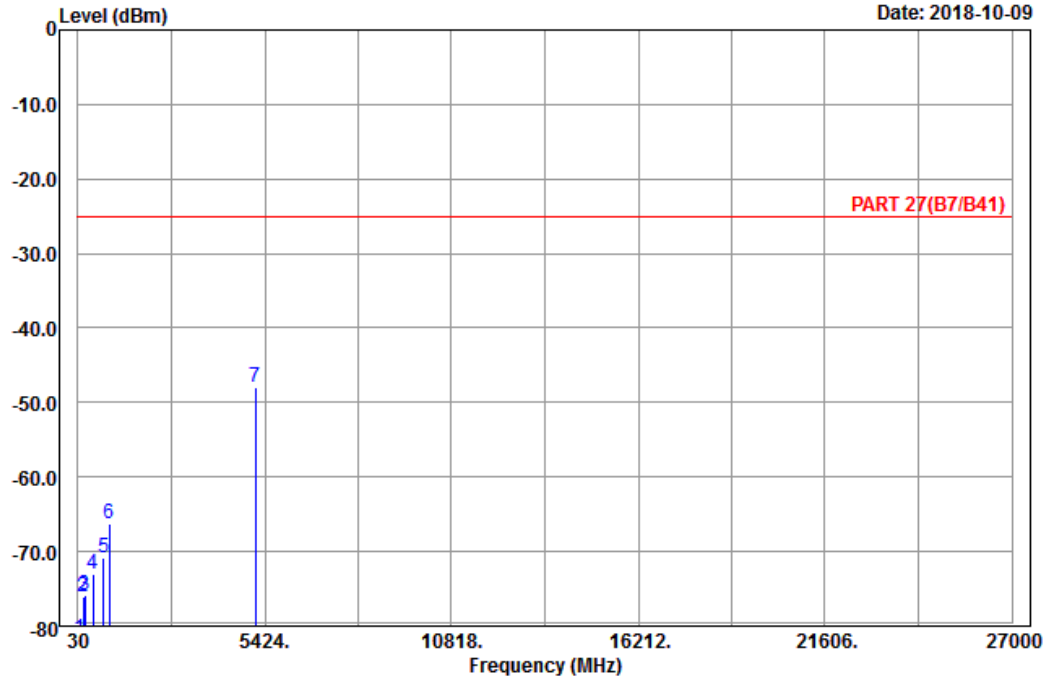

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_CH37850
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	97.77	-81.84	-71.61	-25.00	-56.84	-10.23	Peak
2	182.55	-76.06	-70.45	-25.00	-51.06	-5.61	Peak
3	239.79	-75.75	-70.10	-25.00	-50.75	-5.65	Peak
4	462.40	-72.92	-68.71	-25.00	-47.92	-4.21	Peak
5	766.20	-70.89	-70.67	-25.00	-45.89	-0.22	Peak
6	932.80	-66.34	-70.71	-25.00	-41.34	4.37	Peak
7 pp	5160.00	-47.94	-67.86	-25.00	-22.94	19.92	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

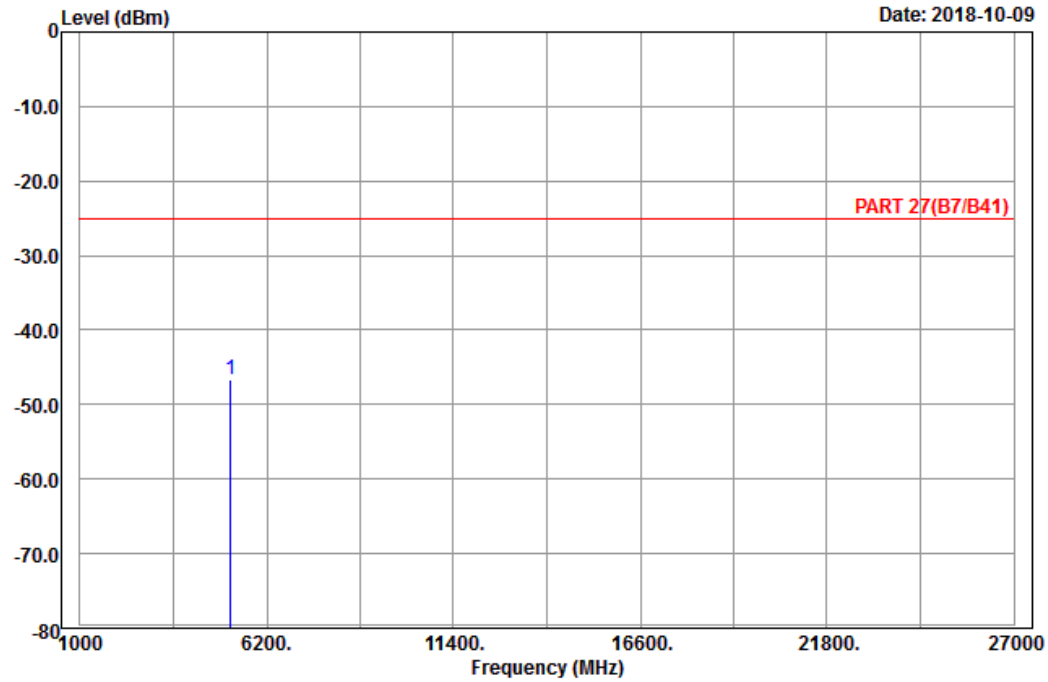

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_CH38000
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5190.00	-46.74	-66.86	-25.00	-21.74	20.12	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

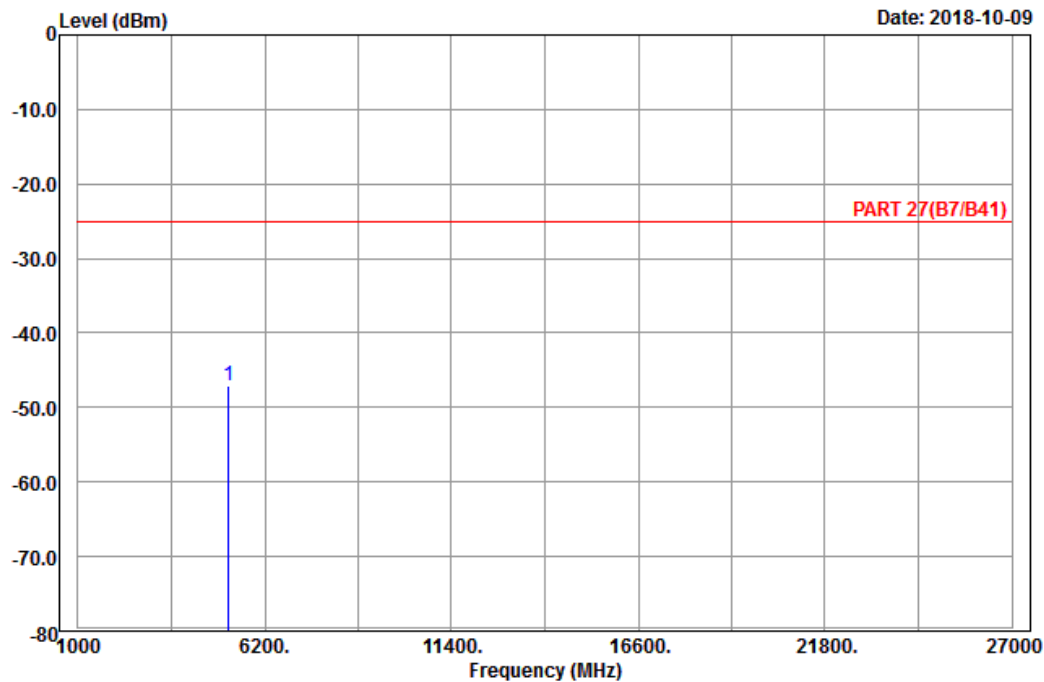

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_CH38000
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5190.00	-47.17	-67.29	-25.00	-22.17	20.12	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

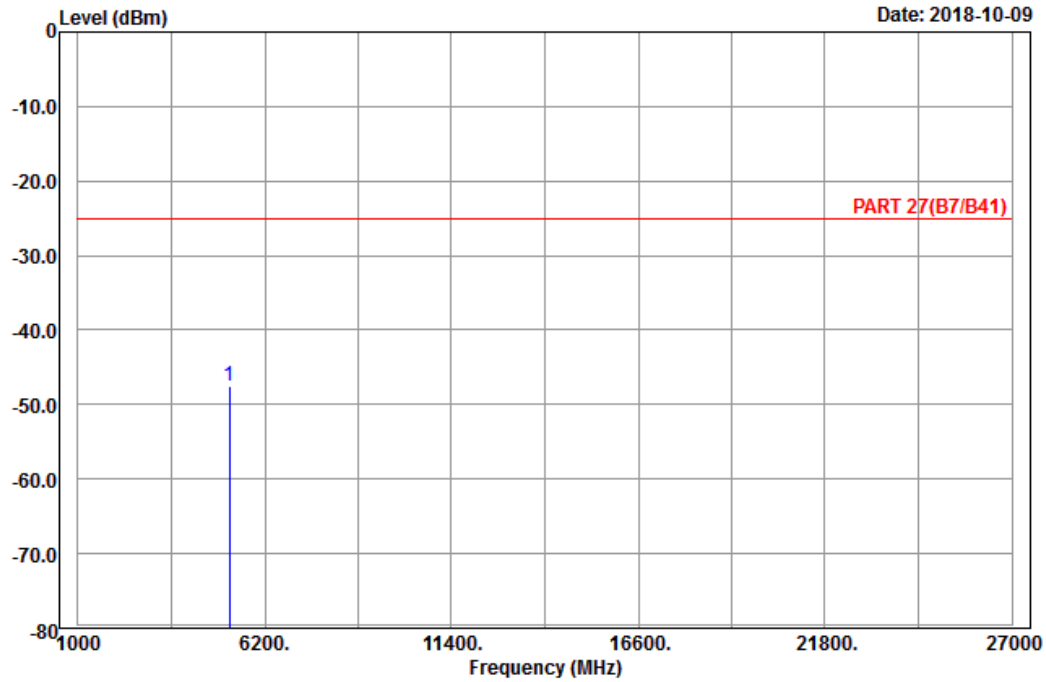

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 38_Link_CH38150
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5220.00	-47.50	-67.64	-25.00	-22.50	20.14	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

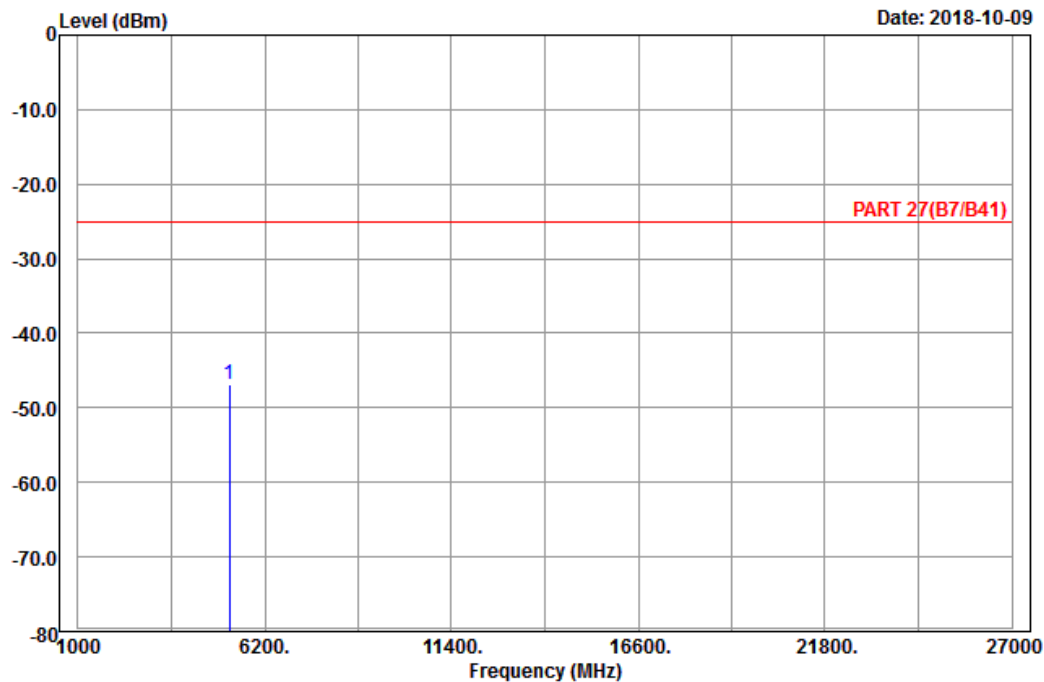

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 38_Link_CH38150
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5220.00	-46.83	-66.97	-25.00	-21.83	20.14	Peak

LTE Band 41
Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-10-09

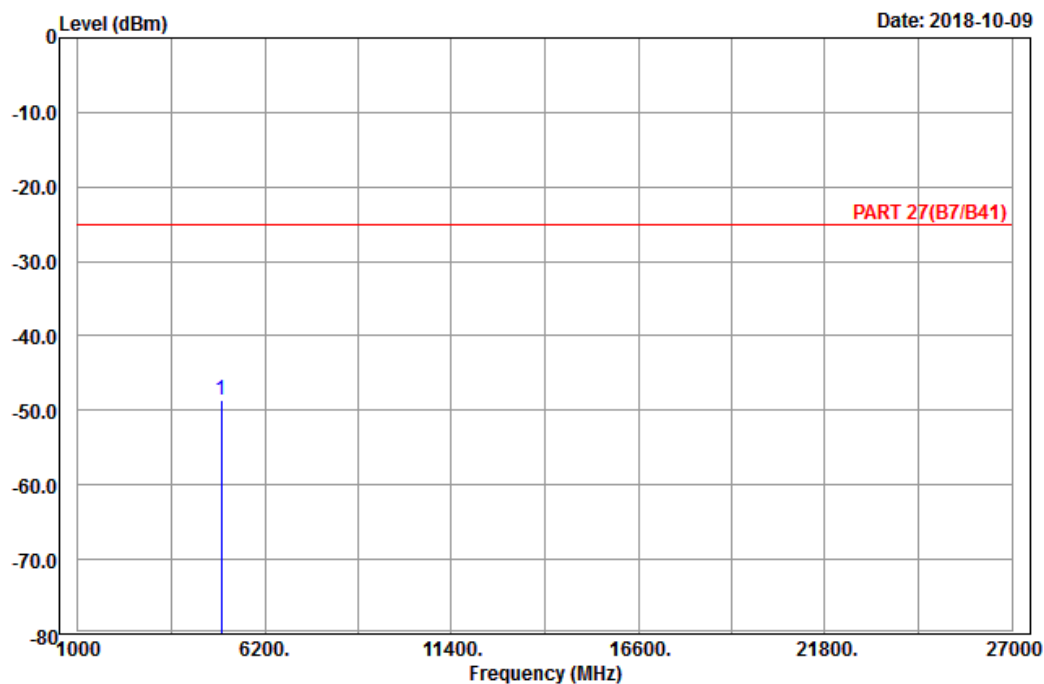

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_CH39675
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 4997.00	-48.65	-68.23	-25.00	-23.65	19.58	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

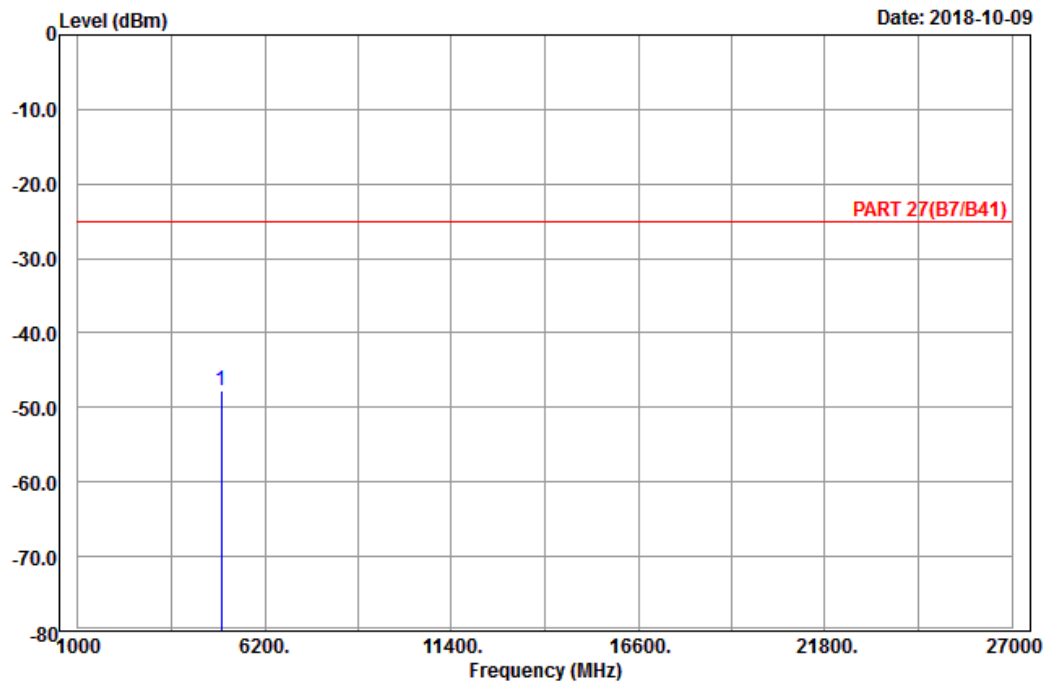

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Vertical
 Remark : LTE_Band 41_Link_CH39675
 Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 4997.00	-47.77	-67.35	-25.00	-22.77	19.58	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

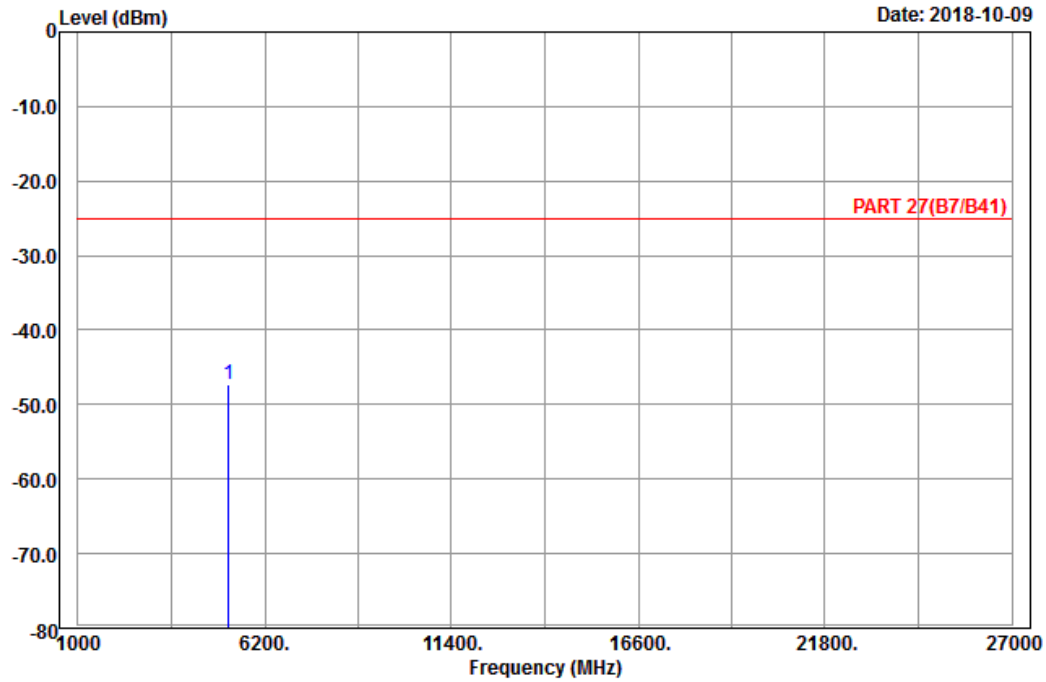

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_CH40620
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5186.00	-47.39	-67.51	-25.00	-22.39	20.12	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

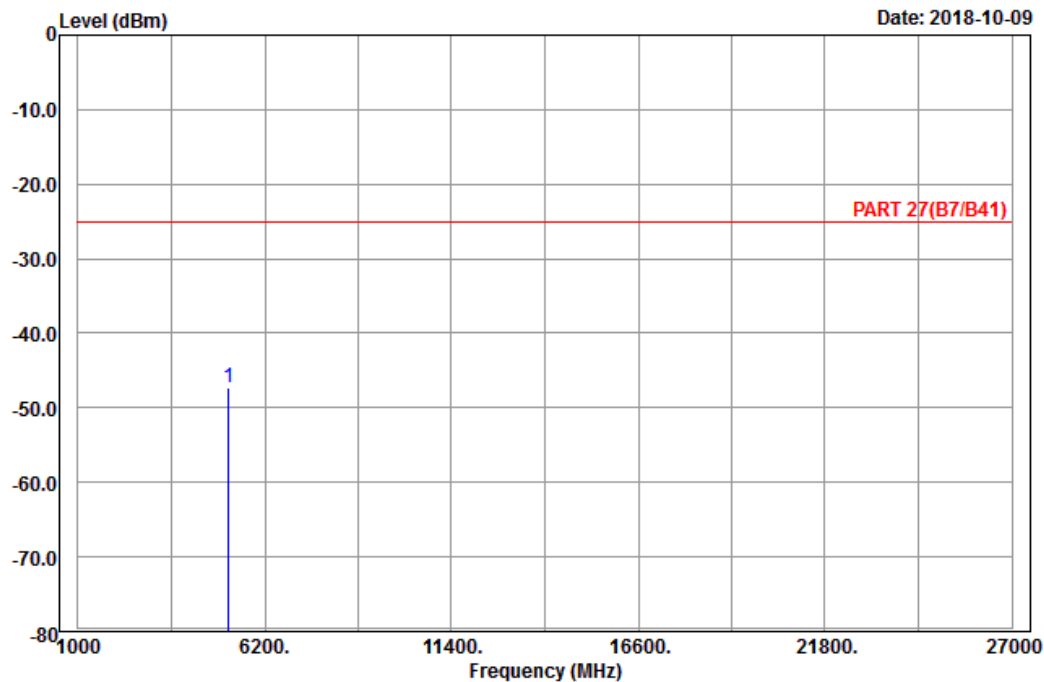

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_CH40620
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5186.00	-47.32	-67.44	-25.00	-22.32	20.12	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

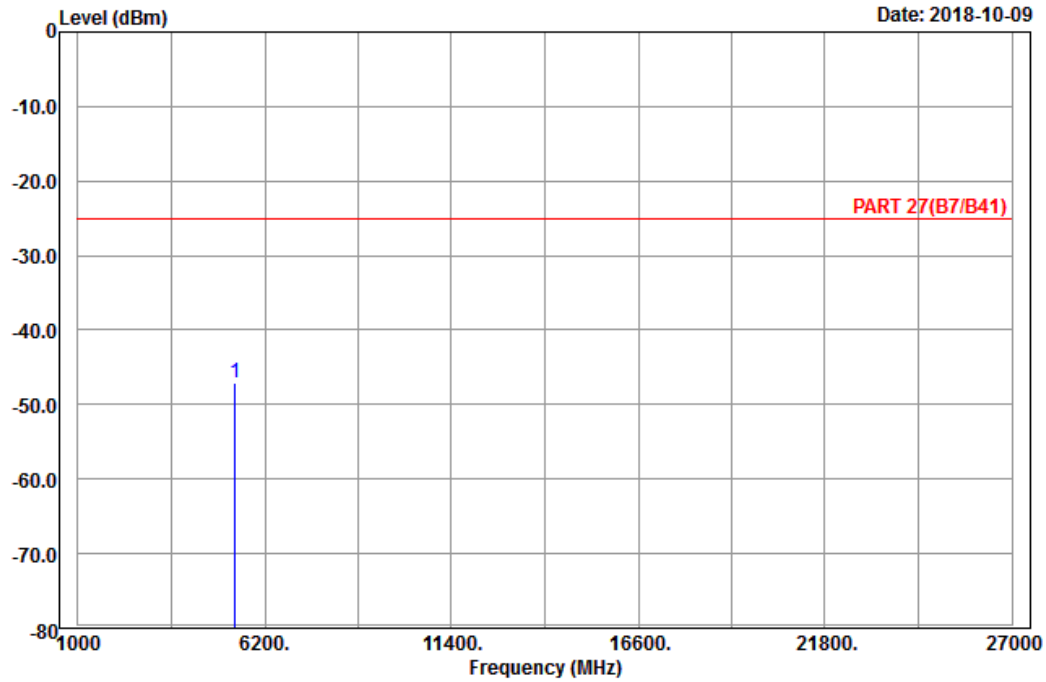

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_CH41565
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5375.00	-47.01	-67.33	-25.00	-22.01	20.32	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

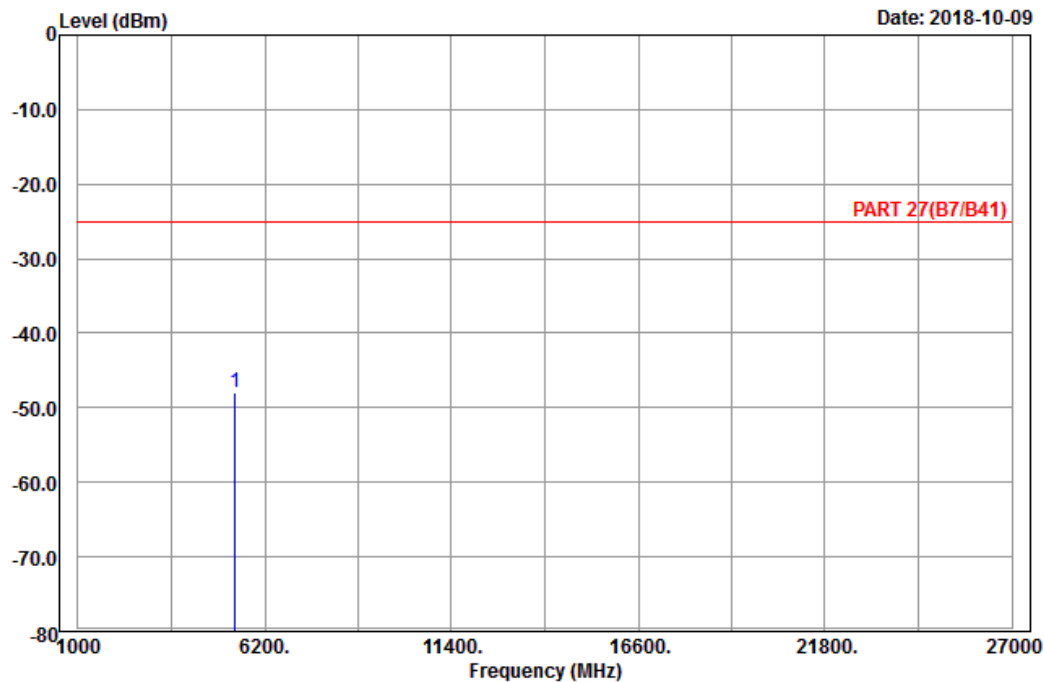

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_CH41565
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5375.00	-47.86	-68.18	-25.00	-22.86	20.32	Peak

Channel Bandwidth: 20 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-10-09

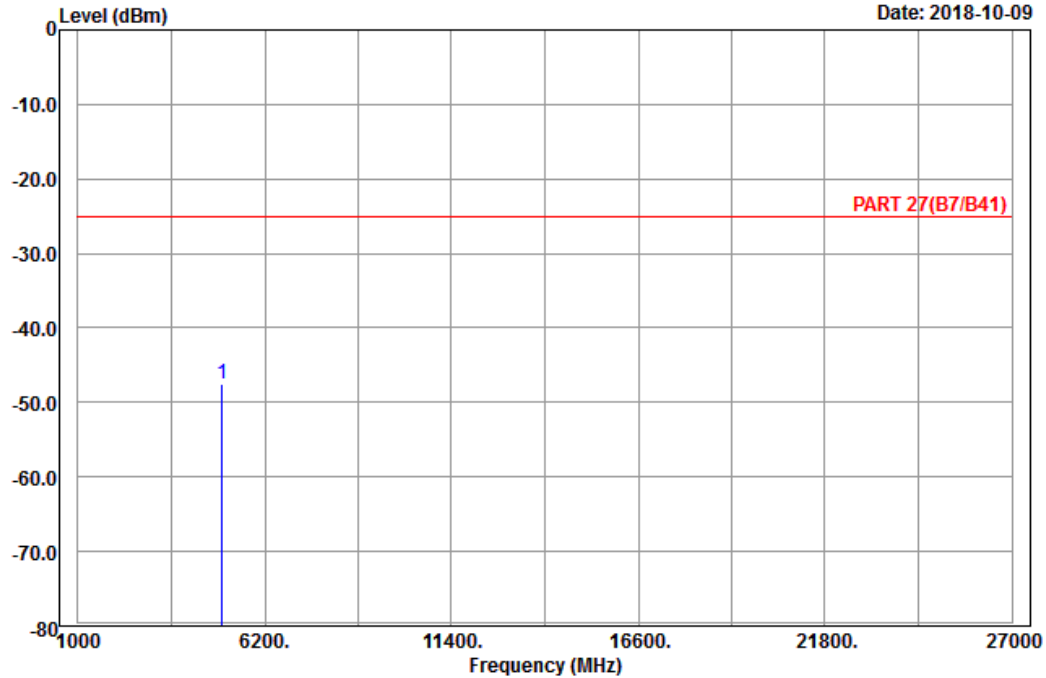

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_CH39750
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5012.00	-47.61	-66.69	-25.00	-22.61	19.08	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

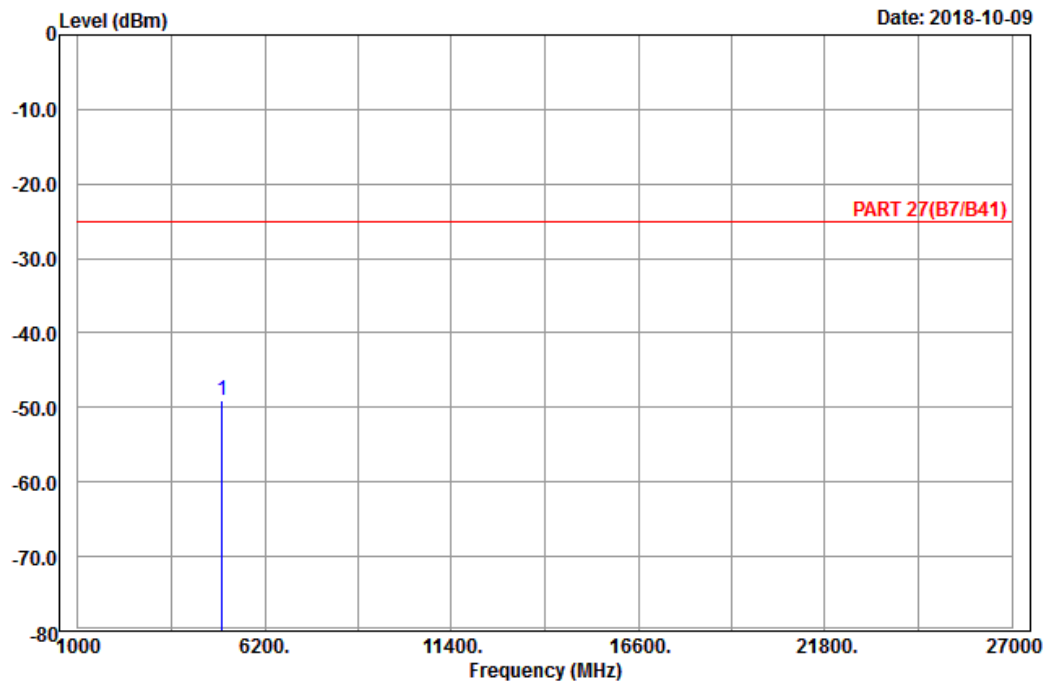

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_CH39750
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5012.00	-48.96	-68.04	-25.00	-23.96	19.08	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

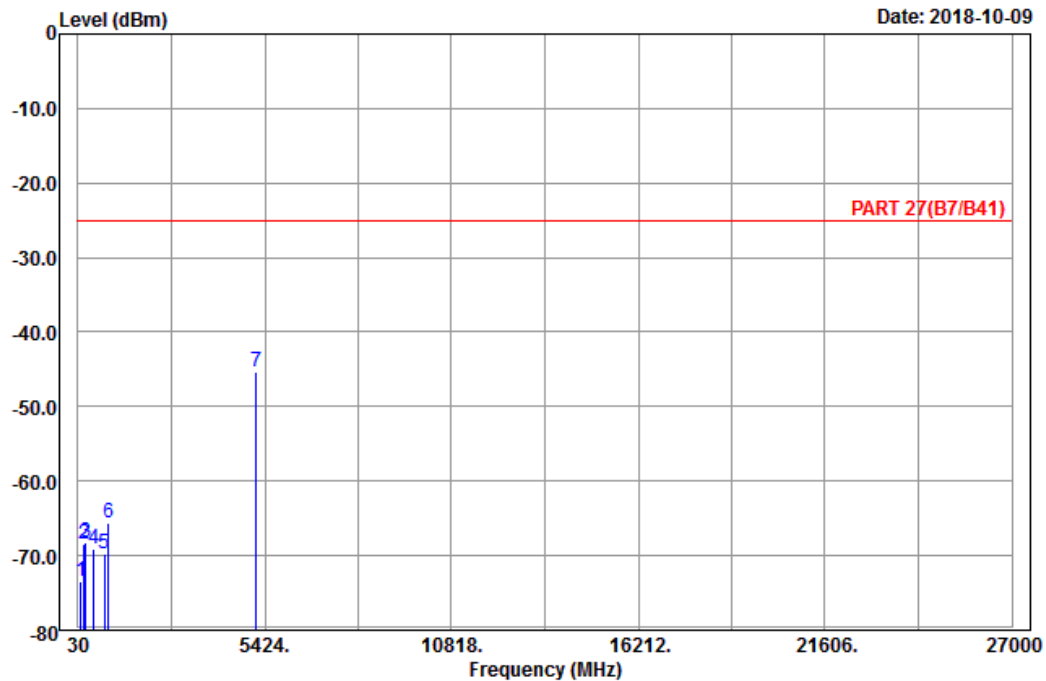

Site : 966 chamber 1
 Condition: PART 27(B7/B41) Horizontal
 Remark : LTE_Band 41_Link_CH40620
 Tested by: Karl Lee

		Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor Remark
	MHz	dBm	dBm	dBm	dB	dB
1	123.42	-73.46	-65.39	-25.00	-48.46	-8.07 Peak
2	210.63	-68.42	-62.38	-25.00	-43.42	-6.04 Peak
3	249.24	-68.19	-62.67	-25.00	-43.19	-5.52 Peak
4	487.60	-69.08	-64.16	-25.00	-44.08	-4.92 Peak
5	783.70	-69.68	-70.60	-25.00	-44.68	0.92 Peak
6	919.50	-65.54	-69.30	-25.00	-40.54	3.76 Peak
7 pp	5186.00	-45.26	-65.38	-25.00	-20.26	20.12 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2018-10-09

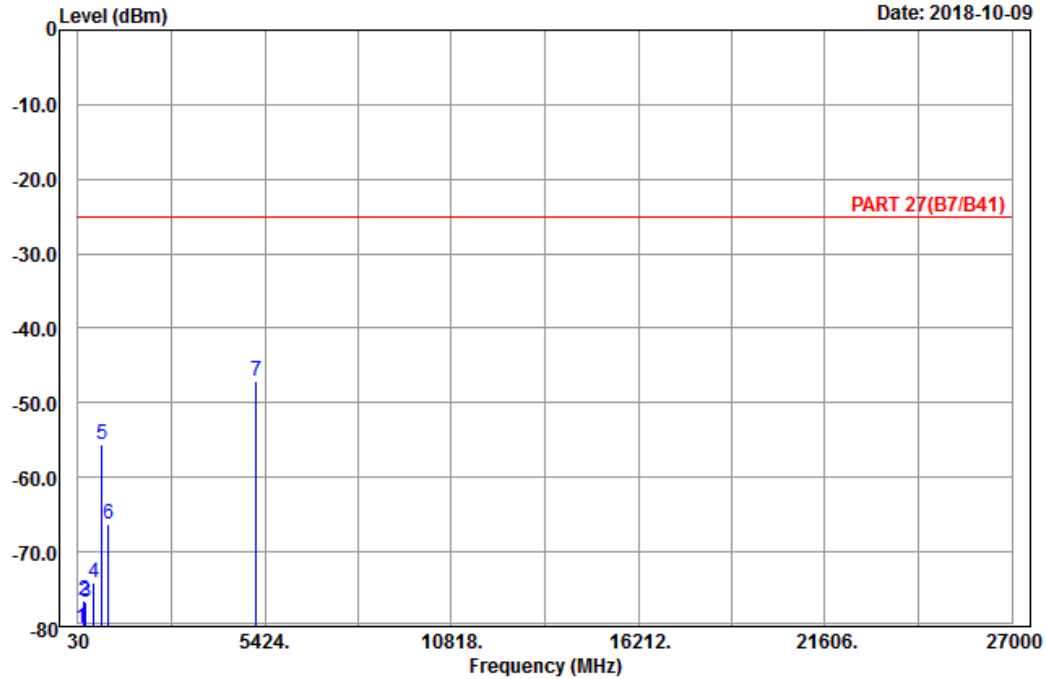

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_CH40620
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	100.47	-80.13	-70.13	-25.00	-55.13	-10.00	Peak
2	212.52	-76.55	-70.54	-25.00	-51.55	-6.01	Peak
3	249.24	-76.73	-71.21	-25.00	-51.73	-5.52	Peak
4	486.20	-74.10	-69.23	-25.00	-49.10	-4.87	Peak
5	729.10	-55.68	-54.75	-25.00	-30.68	-0.93	Peak
6	917.40	-66.19	-69.86	-25.00	-41.19	3.67	Peak
7 pp	5186.00	-47.18	-67.30	-25.00	-22.18	20.12	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

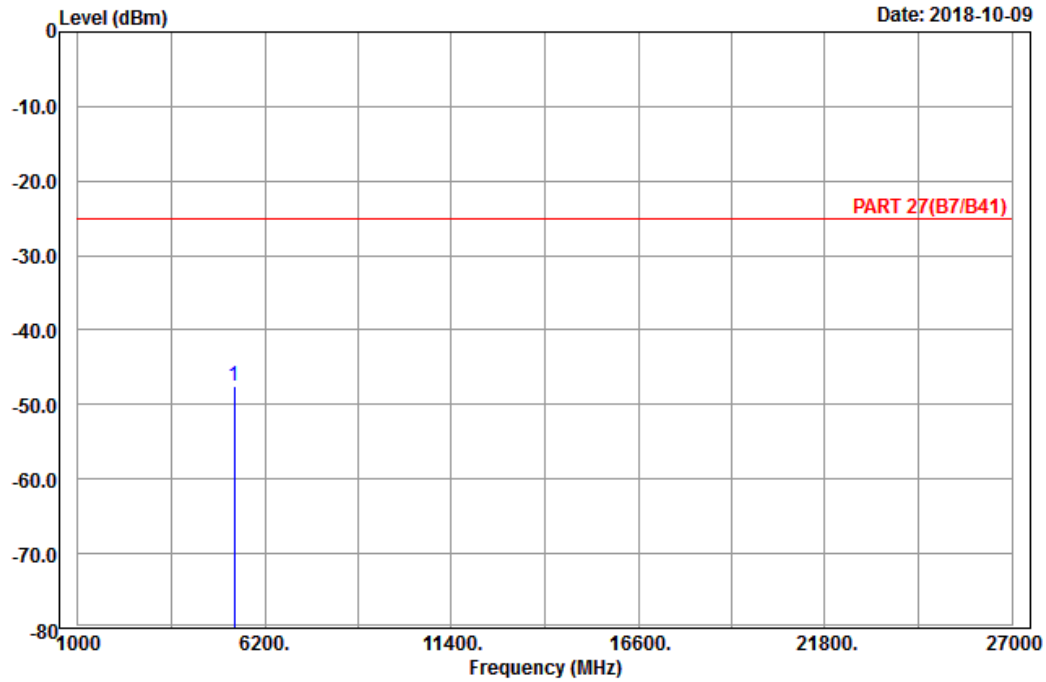

Site : 966 chamber 1
Condition: PART 27(B7/B41) Horizontal
Remark : LTE_Band 41_Link_CH41490
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5360.00	-47.60	-67.90	-25.00	-22.60	20.30	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-10-09

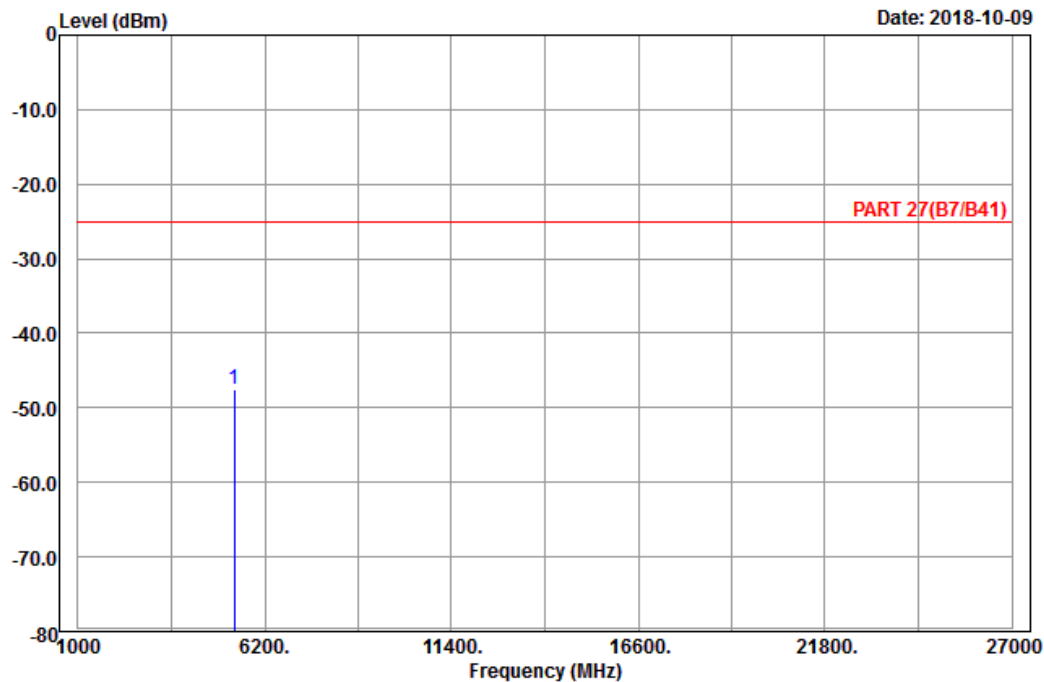

Site : 966 chamber 1
Condition: PART 27(B7/B41) Vertical
Remark : LTE_Band 41_Link_CH41490
Tested by: Karl Lee

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 5360.00	-47.57	-67.87	-25.00	-22.57	20.30	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---