


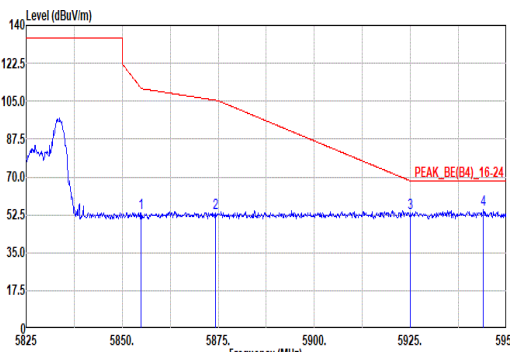
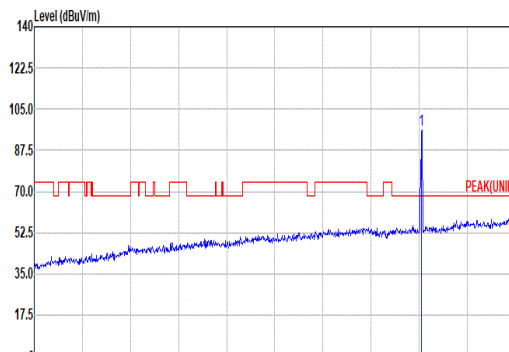
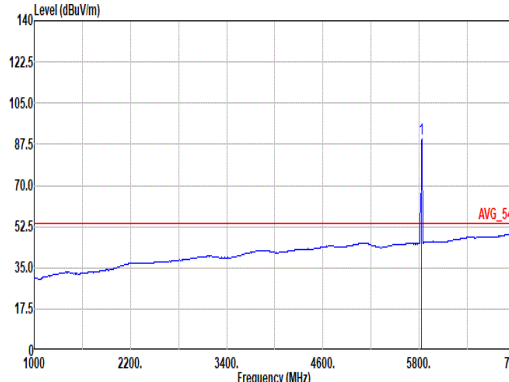




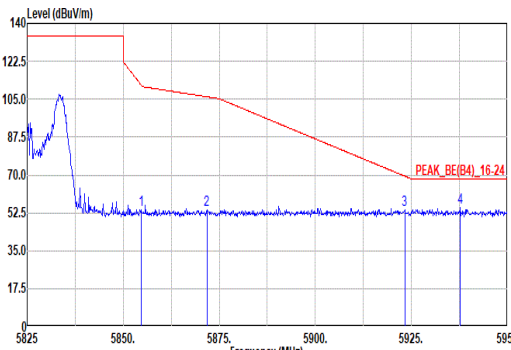


		16																																																																																																																																																		
Mode		Band Edge																																																																																																																																																		
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz																																																																																																																																																		
Pol.		Horizontal					Fundamental																																																																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.88</td><td>53.36</td><td>111.08</td><td>-57.72</td><td>38.95</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>400</td><td>210</td><td>PEAK</td></tr><tr><td>2</td><td>5874.25</td><td>53.30</td><td>105.41</td><td>-52.11</td><td>38.81</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00</td><td>400</td><td>210</td><td>PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>53.23</td><td>68.20</td><td>-14.97</td><td>38.57</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>400</td><td>210</td><td>PEAK</td></tr><tr><td>4</td><td>5944.00</td><td>54.80</td><td>68.20</td><td>-13.40</td><td>40.10</td><td>32.69</td><td>11.98</td><td>29.97</td><td>0.00</td><td>400</td><td>210</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.88	53.36	111.08	-57.72	38.95	32.42	11.91	29.92	0.00	400	210	PEAK	2	5874.25	53.30	105.41	-52.11	38.81	32.50	11.92	29.93	0.00	400	210	PEAK	3	5925.00	53.23	68.20	-14.97	38.57	32.65	11.97	29.96	0.00	400	210	PEAK	4	5944.00	54.80	68.20	-13.40	40.10	32.69	11.98	29.97	0.00	400	210	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>96.35</td><td>-----</td><td>-----</td><td>82.02</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>400</td><td>210</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	96.35	-----	-----	82.02	32.34	11.89	29.90	0.00	400	210	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																										
1	5854.88	53.36	111.08	-57.72	38.95	32.42	11.91	29.92	0.00	400	210	PEAK																																																																																																																																								
2	5874.25	53.30	105.41	-52.11	38.81	32.50	11.92	29.93	0.00	400	210	PEAK																																																																																																																																								
3	5925.00	53.23	68.20	-14.97	38.57	32.65	11.97	29.96	0.00	400	210	PEAK																																																																																																																																								
4	5944.00	54.80	68.20	-13.40	40.10	32.69	11.98	29.97	0.00	400	210	PEAK																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	5825.00	96.35	-----	-----	82.02	32.34	11.89	29.90	0.00	400	210	PEAK																																																																																																																																								
Avg	Blank										 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>89.80</td><td>-----</td><td>-----</td><td>75.47</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>400</td><td>210</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	89.80	-----	-----	75.47	32.34	11.89	29.90	0.00	400	210	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	5825.00	89.80	-----	-----	75.47	32.34	11.89	29.90	0.00	400	210	AVERAGE																																																																																																																																								



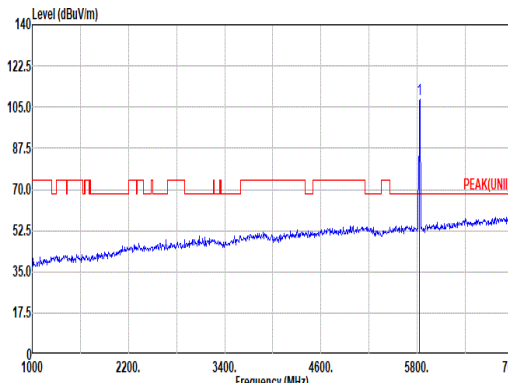


		16																																																																																																																																																			
Mode	Band Edge																																																																																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz																																																																																																																																																				
Pol.	Vertical																																																																																																																																																				
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.63</td><td>53.64</td><td>111.65</td><td>-58.01</td><td>39.23</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr><tr><td>2</td><td>5871.75</td><td>53.95</td><td>106.11</td><td>-52.16</td><td>39.47</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr><tr><td>3</td><td>5923.25</td><td>53.97</td><td>69.49</td><td>-15.52</td><td>39.32</td><td>32.65</td><td>11.96</td><td>29.96</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr><tr><td>4</td><td>5937.75</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>40.08</td><td>32.68</td><td>11.98</td><td>29.96</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.63	53.64	111.65	-58.01	39.23	32.42	11.91	29.92	0.00	283	217	PEAK	2	5871.75	53.95	106.11	-52.16	39.47	32.49	11.92	29.93	0.00	283	217	PEAK	3	5923.25	53.97	69.49	-15.52	39.32	32.65	11.96	29.96	0.00	283	217	PEAK	4	5937.75	54.78	68.20	-13.42	40.08	32.68	11.98	29.96	0.00	283	217	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>108.06</td><td>-----</td><td>-----</td><td>93.73</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	108.06	-----	-----	93.73	32.34	11.89	29.90	0.00	283	217	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																											
1	5854.63	53.64	111.65	-58.01	39.23	32.42	11.91	29.92	0.00	283	217	PEAK																																																																																																																																									
2	5871.75	53.95	106.11	-52.16	39.47	32.49	11.92	29.93	0.00	283	217	PEAK																																																																																																																																									
3	5923.25	53.97	69.49	-15.52	39.32	32.65	11.96	29.96	0.00	283	217	PEAK																																																																																																																																									
4	5937.75	54.78	68.20	-13.42	40.08	32.68	11.98	29.96	0.00	283	217	PEAK																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																											
1	5825.00	108.06	-----	-----	93.73	32.34	11.89	29.90	0.00	283	217	PEAK																																																																																																																																									
Avg	Blank											 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>99.07</td><td>-----</td><td>-----</td><td>84.74</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>283</td><td>217</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	99.07	-----	-----	84.74	32.34	11.89	29.90	0.00	283	217	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																											
1	5825.00	99.07	-----	-----	84.74	32.34	11.89	29.90	0.00	283	217	AVERAGE																																																																																																																																									



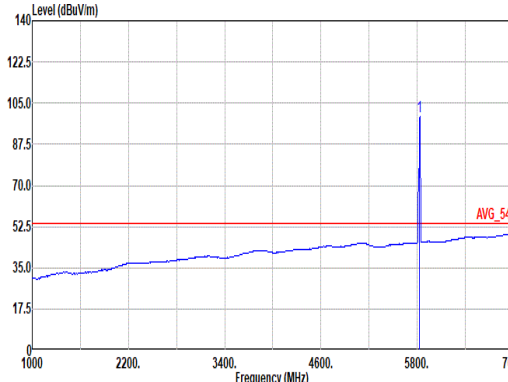


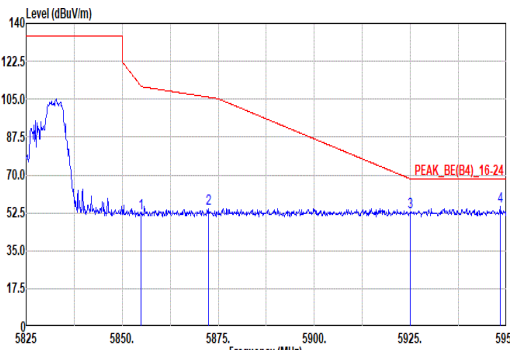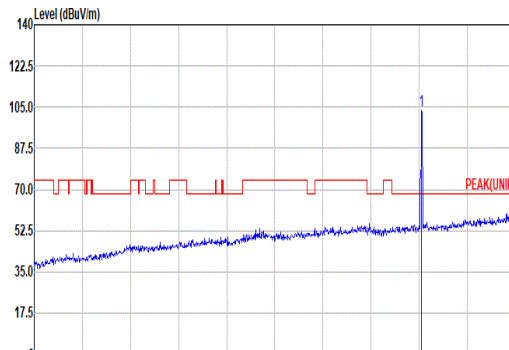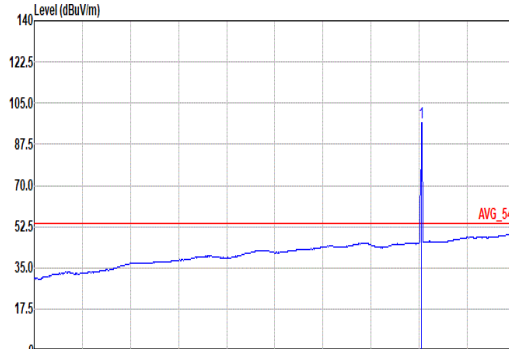Mode	17																																																																																																																					
	Band Edge																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5854.88</td><td>52.51</td><td>111.08</td><td>-58.57</td><td>38.10</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr><tr><td>2 5872.38</td><td>54.24</td><td>105.93</td><td>-51.69</td><td>39.76</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr><tr><td>3 5924.88</td><td>52.62</td><td>68.29</td><td>-15.67</td><td>37.96</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr><tr><td>4 5948.38</td><td>55.49</td><td>68.20</td><td>-12.71</td><td>40.77</td><td>32.70</td><td>11.99</td><td>29.97</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.88	52.51	111.08	-58.57	38.10	32.42	11.91	29.92	0.00	100	183 PEAK	2 5872.38	54.24	105.93	-51.69	39.76	32.49	11.92	29.93	0.00	100	183 PEAK	3 5924.88	52.62	68.29	-15.67	37.96	32.65	11.97	29.96	0.00	100	183 PEAK	4 5948.38	55.49	68.20	-12.71	40.77	32.70	11.99	29.97	0.00	100	183 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>103.68</td><td>-----</td><td>89.37</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	103.68	-----	89.37	32.32	11.89	29.90	0.00	100	183 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1 5854.88	52.51	111.08	-58.57	38.10	32.42	11.91	29.92	0.00	100	183 PEAK																																																																																																												
2 5872.38	54.24	105.93	-51.69	39.76	32.49	11.92	29.93	0.00	100	183 PEAK																																																																																																												
3 5924.88	52.62	68.29	-15.67	37.96	32.65	11.97	29.96	0.00	100	183 PEAK																																																																																																												
4 5948.38	55.49	68.20	-12.71	40.77	32.70	11.99	29.97	0.00	100	183 PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1 5825.00	103.68	-----	89.37	32.32	11.89	29.90	0.00	100	183 PEAK																																																																																																													
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>96.81</td><td>-----</td><td>82.50</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>183 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	96.81	-----	82.50	32.32	11.89	29.90	0.00	100	183 AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1 5825.00	96.81	-----	82.50	32.32	11.89	29.90	0.00	100	183 AVERAGE																																																																																																													

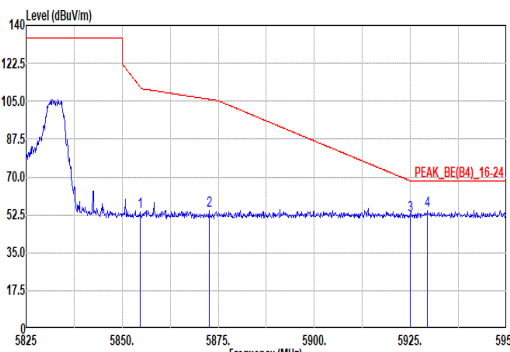
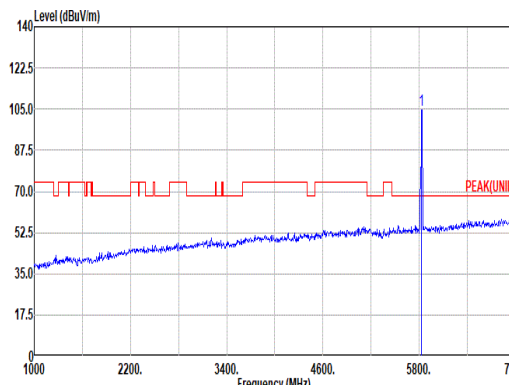
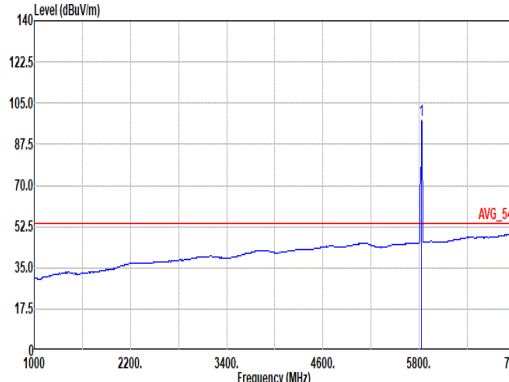


Mode	17																																																																																																																																
	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.75</td><td>53.77</td><td>111.37</td><td>-57.60</td><td>39.36</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>2</td><td>5872.63</td><td>54.38</td><td>105.86</td><td>-51.48</td><td>39.90</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>52.17</td><td>68.20</td><td>-16.03</td><td>37.51</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>4</td><td>5929.50</td><td>54.59</td><td>68.20</td><td>-13.61</td><td>39.92</td><td>32.66</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.75	53.77	111.37	-57.60	39.36	32.42	11.91	29.92	0.00	100	219	PEAK	2	5872.63	54.38	105.86	-51.48	39.90	32.49	11.92	29.93	0.00	100	219	PEAK	3	5925.00	52.17	68.20	-16.03	37.51	32.65	11.97	29.96	0.00	100	219	PEAK	4	5929.50	54.59	68.20	-13.61	39.92	32.66	11.97	29.96	0.00	100	219	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>104.83</td><td>-----</td><td>-----</td><td>90.50</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	104.83	-----	-----	90.50	32.34	11.89	29.90	0.00	100	219	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5854.75	53.77	111.37	-57.60	39.36	32.42	11.91	29.92	0.00	100	219	PEAK																																																																																																																					
2	5872.63	54.38	105.86	-51.48	39.90	32.49	11.92	29.93	0.00	100	219	PEAK																																																																																																																					
3	5925.00	52.17	68.20	-16.03	37.51	32.65	11.97	29.96	0.00	100	219	PEAK																																																																																																																					
4	5929.50	54.59	68.20	-13.61	39.92	32.66	11.97	29.96	0.00	100	219	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	104.83	-----	-----	90.50	32.34	11.89	29.90	0.00	100	219	PEAK																																																																																																																					
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>97.87</td><td>-----</td><td>-----</td><td>83.56</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	97.87	-----	-----	83.56	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5825.00	97.87	-----	-----	83.56	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																																																					

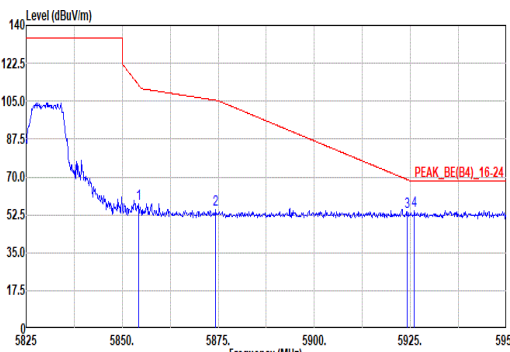
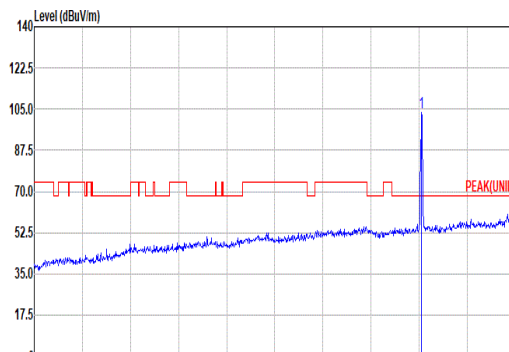
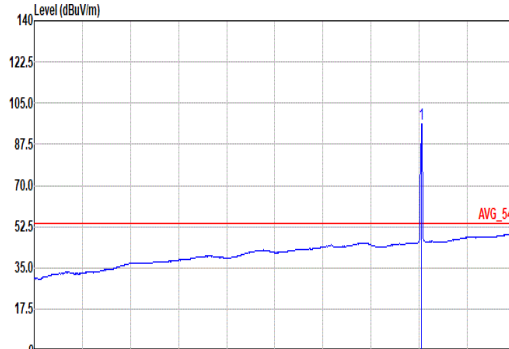


Mode	18																																																																																																															
	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5854.25</td><td>57.66</td><td>112.51</td><td>-54.85</td><td>43.25</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100 182 PEAK</td></tr><tr><td>2 5874.25</td><td>54.86</td><td>105.41</td><td>-50.55</td><td>40.37</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100 182 PEAK</td></tr><tr><td>3 5924.13</td><td>53.97</td><td>68.84</td><td>-14.87</td><td>39.31</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100 182 PEAK</td></tr><tr><td>4 5926.00</td><td>54.29</td><td>68.20</td><td>-13.91</td><td>39.63</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100 182 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5854.25	57.66	112.51	-54.85	43.25	32.42	11.91	29.92	0.00	100 182 PEAK	2 5874.25	54.86	105.41	-50.55	40.37	32.50	11.92	29.93	0.00	100 182 PEAK	3 5924.13	53.97	68.84	-14.87	39.31	32.65	11.97	29.96	0.00	100 182 PEAK	4 5926.00	54.29	68.20	-13.91	39.63	32.65	11.97	29.96	0.00	100 182 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>103.80</td><td>-----</td><td>-----</td><td>89.49</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100 182 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5825.00	103.80	-----	-----	89.49	32.32	11.89	29.90	0.00	100 182 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5854.25	57.66	112.51	-54.85	43.25	32.42	11.91	29.92	0.00	100 182 PEAK																																																																																																							
2 5874.25	54.86	105.41	-50.55	40.37	32.50	11.92	29.93	0.00	100 182 PEAK																																																																																																							
3 5924.13	53.97	68.84	-14.87	39.31	32.65	11.97	29.96	0.00	100 182 PEAK																																																																																																							
4 5926.00	54.29	68.20	-13.91	39.63	32.65	11.97	29.96	0.00	100 182 PEAK																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5825.00	103.80	-----	-----	89.49	32.32	11.89	29.90	0.00	100 182 PEAK																																																																																																							
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.220kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>96.41</td><td>-----</td><td>-----</td><td>82.10</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100 182 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5825.00	96.41	-----	-----	82.10	32.32	11.89	29.90	0.00	100 182 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5825.00	96.41	-----	-----	82.10	32.32	11.89	29.90	0.00	100 182 AVERAGE																																																																																																							

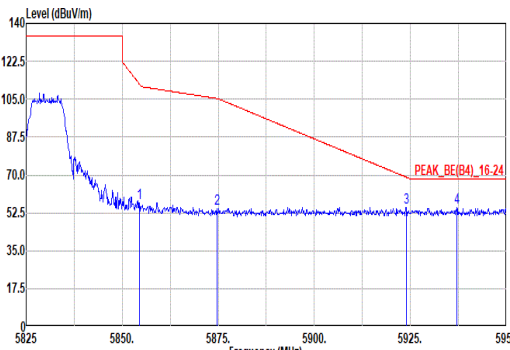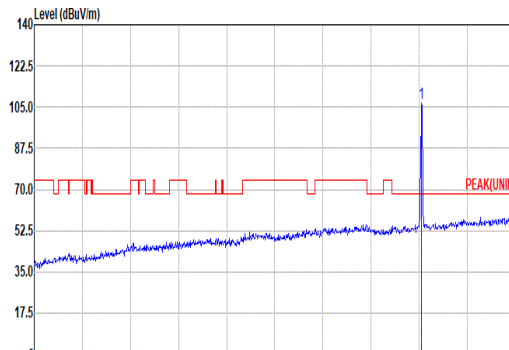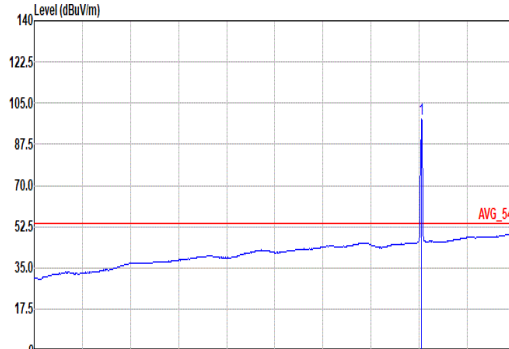


Mode	18																																																																																																																																									
	Band Edge																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.50</td><td>57.11</td><td>111.94</td><td>-54.83</td><td>42.70</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>2</td><td>5874.75</td><td>54.27</td><td>105.27</td><td>-51.00</td><td>39.78</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>3</td><td>5923.80</td><td>54.90</td><td>69.03</td><td>-14.13</td><td>40.24</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>4</td><td>5937.00</td><td>54.86</td><td>68.20</td><td>-13.34</td><td>40.17</td><td>32.67</td><td>11.98</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.50	57.11	111.94	-54.83	42.70	32.42	11.91	29.92	0.00	100	219	PEAK	2	5874.75	54.27	105.27	-51.00	39.78	32.50	11.92	29.93	0.00	100	219	PEAK	3	5923.80	54.90	69.03	-14.13	40.24	32.65	11.97	29.96	0.00	100	219	PEAK	4	5937.00	54.86	68.20	-13.34	40.17	32.67	11.98	29.96	0.00	100	219	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>106.82</td><td>-----</td><td>-----</td><td>92.51</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	106.82	-----	-----	92.51	32.32	11.89	29.90	0.00	100	219	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5854.50	57.11	111.94	-54.83	42.70	32.42	11.91	29.92	0.00	100	219	PEAK																																																																																																																														
2	5874.75	54.27	105.27	-51.00	39.78	32.50	11.92	29.93	0.00	100	219	PEAK																																																																																																																														
3	5923.80	54.90	69.03	-14.13	40.24	32.65	11.97	29.96	0.00	100	219	PEAK																																																																																																																														
4	5937.00	54.86	68.20	-13.34	40.17	32.67	11.98	29.96	0.00	100	219	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5825.00	106.82	-----	-----	92.51	32.32	11.89	29.90	0.00	100	219	PEAK																																																																																																																														
Avg	Blank						 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.220kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5825.00</td><td>98.18</td><td>-----</td><td>-----</td><td>83.87</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	98.18	-----	-----	83.87	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5825.00	98.18	-----	-----	83.87	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																																																														

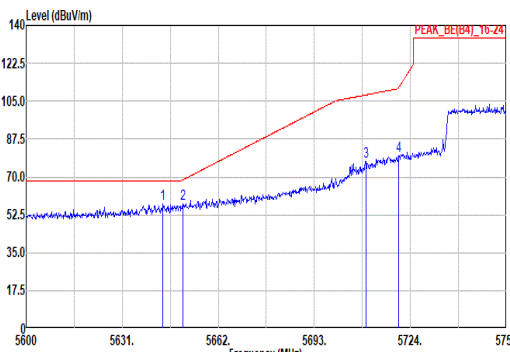
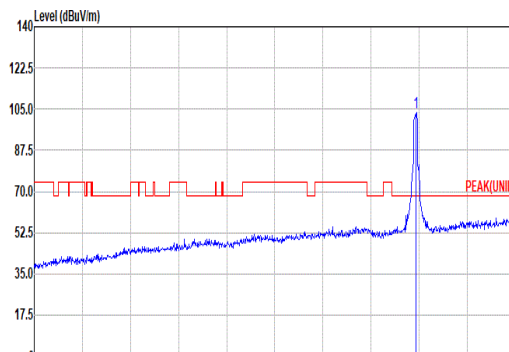
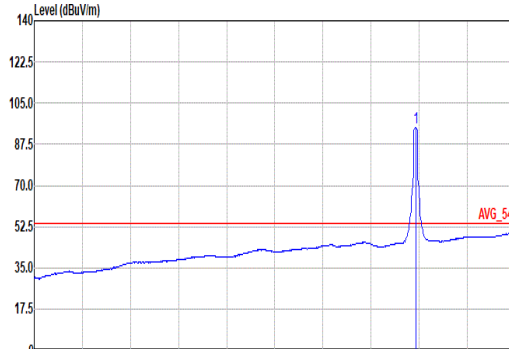


Mode	19																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5644.18</td><td>57.60</td><td>68.20</td><td>-10.60</td><td>43.81</td><td>31.88</td><td>11.70</td><td>29.79</td><td>0.00 100 182 PEAK</td></tr><tr><td>2</td><td>5650.69</td><td>57.47</td><td>68.71</td><td>-11.24</td><td>43.67</td><td>31.90</td><td>11.70</td><td>29.80</td><td>0.00 100 182 PEAK</td></tr><tr><td>3</td><td>5709.59</td><td>77.28</td><td>107.89</td><td>-30.61</td><td>63.24</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00 100 182 PEAK</td></tr><tr><td>4</td><td>5728.28</td><td>79.62</td><td>111.44</td><td>-31.82</td><td>65.58</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00 100 182 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5644.18	57.60	68.20	-10.60	43.81	31.88	11.70	29.79	0.00 100 182 PEAK	2	5650.69	57.47	68.71	-11.24	43.67	31.90	11.70	29.80	0.00 100 182 PEAK	3	5709.59	77.28	107.89	-30.61	63.24	32.10	11.77	29.83	0.00 100 182 PEAK	4	5728.28	79.62	111.44	-31.82	65.58	32.10	11.78	29.84	0.00 100 182 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5755.00</td><td>103.37</td><td>-----</td><td>-----</td><td>89.27</td><td>32.14</td><td>11.83</td><td>29.87</td><td>0.00 100 182 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5755.00	103.37	-----	-----	89.27	32.14	11.83	29.87	0.00 100 182 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5644.18	57.60	68.20	-10.60	43.81	31.88	11.70	29.79	0.00 100 182 PEAK																																																																																																							
2	5650.69	57.47	68.71	-11.24	43.67	31.90	11.70	29.80	0.00 100 182 PEAK																																																																																																							
3	5709.59	77.28	107.89	-30.61	63.24	32.10	11.77	29.83	0.00 100 182 PEAK																																																																																																							
4	5728.28	79.62	111.44	-31.82	65.58	32.10	11.78	29.84	0.00 100 182 PEAK																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5755.00	103.37	-----	-----	89.27	32.14	11.83	29.87	0.00 100 182 PEAK																																																																																																							
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.560kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5755.00</td><td>94.61</td><td>-----</td><td>-----</td><td>80.53</td><td>32.12</td><td>11.82</td><td>29.86</td><td>0.00 100 182 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5755.00	94.61	-----	-----	80.53	32.12	11.82	29.86	0.00 100 182 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5755.00	94.61	-----	-----	80.53	32.12	11.82	29.86	0.00 100 182 AVERAGE																																																																																																							

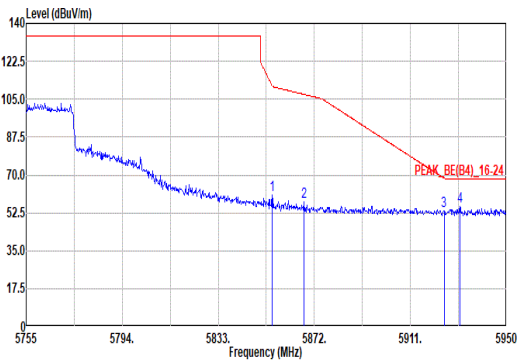


Mode	19																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.84</td><td>60.63</td><td>111.17</td><td>-50.54</td><td>46.22</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 100 182 PEAK</td></tr><tr><td>2</td><td>5867.91</td><td>57.58</td><td>107.18</td><td>-49.60</td><td>43.11</td><td>32.47</td><td>11.92</td><td>29.92</td><td>0.00 100 182 PEAK</td></tr><tr><td>3</td><td>5924.65</td><td>53.38</td><td>68.46</td><td>-15.08</td><td>38.72</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 100 182 PEAK</td></tr><tr><td>4</td><td>5931.09</td><td>55.28</td><td>68.20</td><td>-12.92</td><td>40.61</td><td>32.66</td><td>11.97</td><td>29.96</td><td>0.00 100 182 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.84	60.63	111.17	-50.54	46.22	32.42	11.91	29.92	0.00 100 182 PEAK	2	5867.91	57.58	107.18	-49.60	43.11	32.47	11.92	29.92	0.00 100 182 PEAK	3	5924.65	53.38	68.46	-15.08	38.72	32.65	11.97	29.96	0.00 100 182 PEAK	4	5931.09	55.28	68.20	-12.92	40.61	32.66	11.97	29.96	0.00 100 182 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.84	60.63	111.17	-50.54	46.22	32.42	11.91	29.92	0.00 100 182 PEAK																																																															
2	5867.91	57.58	107.18	-49.60	43.11	32.47	11.92	29.92	0.00 100 182 PEAK																																																															
3	5924.65	53.38	68.46	-15.08	38.72	32.65	11.97	29.96	0.00 100 182 PEAK																																																															
4	5931.09	55.28	68.20	-12.92	40.61	32.66	11.97	29.96	0.00 100 182 PEAK																																																															

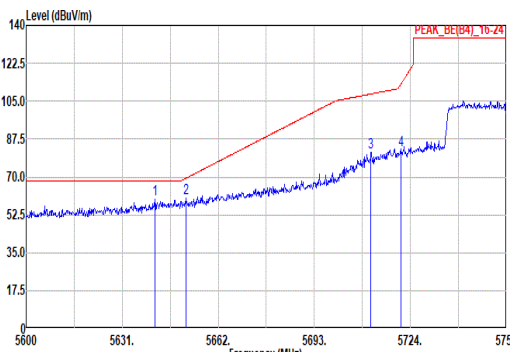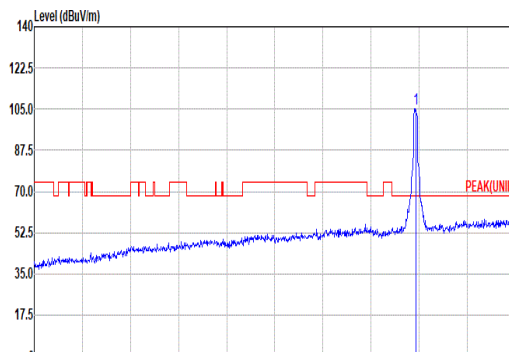
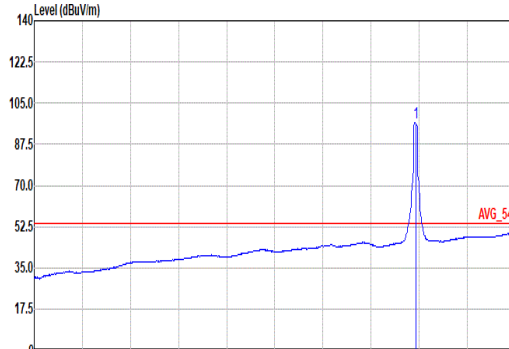


Mode	19																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	 Level (dBuV/m) Frequency (MHz) Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00 271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00 271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00 271 213 PEAK</td></tr><tr><td>4</td><td>5728.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00 271 213 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00 271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00 271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00 271 213 PEAK	4	5728.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00 271 213 PEAK	 Level (dBuV/m) Frequency (MHz) Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00 271 213 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00 271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00 271 213 PEAK																																																																																																							
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00 271 213 PEAK																																																																																																							
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00 271 213 PEAK																																																																																																							
4	5728.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00 271 213 PEAK																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00 271 213 PEAK																																																																																																							
Avg	Blank	 Level (dBuV/m) Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.560kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5755.00</td><td>96.48</td><td>-----</td><td>-----</td><td>82.43</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00 271 213 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5755.00	96.48	-----	-----	82.43	32.10	11.80	29.85	0.00 271 213 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5755.00	96.48	-----	-----	82.43	32.10	11.80	29.85	0.00 271 213 AVERAGE																																																																																																							




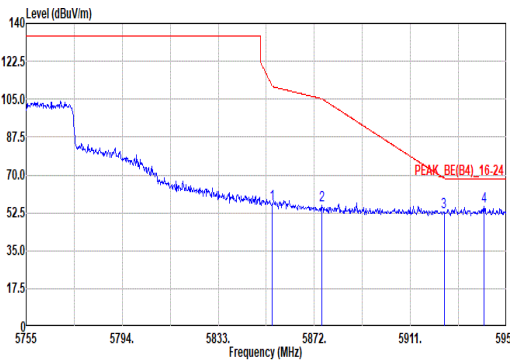


Mode	19																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.84</td><td>56.46</td><td>111.17</td><td>-54.71</td><td>42.05</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr><tr><td>2</td><td>5874.93</td><td>55.76</td><td>105.22</td><td>-49.46</td><td>41.27</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr><tr><td>3</td><td>5924.65</td><td>52.99</td><td>68.46</td><td>-15.47</td><td>38.33</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr><tr><td>4</td><td>5940.04</td><td>55.30</td><td>68.20</td><td>-12.90</td><td>40.61</td><td>32.68</td><td>11.98</td><td>29.97</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB		1	5854.84	56.46	111.17	-54.71	42.05	32.42	11.91	29.92	0.00	271	213	PEAK	2	5874.93	55.76	105.22	-49.46	41.27	32.50	11.92	29.93	0.00	271	213	PEAK	3	5924.65	52.99	68.46	-15.47	38.33	32.65	11.97	29.96	0.00	271	213	PEAK	4	5940.04	55.30	68.20	-12.90	40.61	32.68	11.98	29.97	0.00	271	213	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																																																												
1	5854.84	56.46	111.17	-54.71	42.05	32.42	11.91	29.92	0.00	271	213	PEAK																																																																								
2	5874.93	55.76	105.22	-49.46	41.27	32.50	11.92	29.93	0.00	271	213	PEAK																																																																								
3	5924.65	52.99	68.46	-15.47	38.33	32.65	11.97	29.96	0.00	271	213	PEAK																																																																								
4	5940.04	55.30	68.20	-12.90	40.61	32.68	11.98	29.97	0.00	271	213	PEAK																																																																								


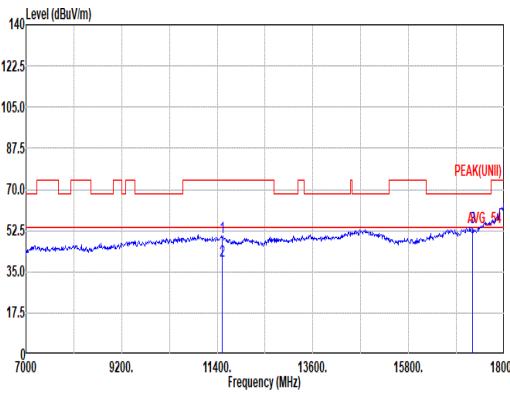
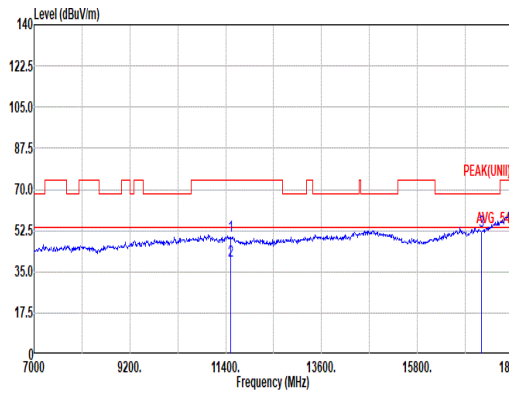


Mode	19																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91280-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>58.20</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11510.00</td><td>39.82</td><td>54.00</td><td>-14.18</td><td>48.11</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>17265.00</td><td>53.88</td><td>68.20</td><td>-14.32</td><td>55.90</td><td>40.66</td><td>21.05</td><td>64.35</td><td>0.62</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	49.91	74.00	-24.09	58.20	40.10	16.75	65.73	0.59	--	PEAK	2	11510.00	39.82	54.00	-14.18	48.11	40.10	16.75	65.73	0.59	--	AVERAGE	3	17265.00	53.88	68.20	-14.32	55.90	40.66	21.05	64.35	0.62	--	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91280-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>58.39</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11510.00</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>48.10</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>17265.00</td><td>52.36</td><td>68.20</td><td>-15.84</td><td>54.38</td><td>40.66</td><td>21.05</td><td>64.35</td><td>0.62</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	50.10	74.00	-23.90	58.39	40.10	16.75	65.73	0.59	--	PEAK	2	11510.00	39.81	54.00	-14.19	48.10	40.10	16.75	65.73	0.59	--	AVERAGE	3	17265.00	52.36	68.20	-15.84	54.38	40.66	21.05	64.35	0.62	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11510.00	49.91	74.00	-24.09	58.20	40.10	16.75	65.73	0.59	--	PEAK																																																																																																																													
2	11510.00	39.82	54.00	-14.18	48.11	40.10	16.75	65.73	0.59	--	AVERAGE																																																																																																																													
3	17265.00	53.88	68.20	-14.32	55.90	40.66	21.05	64.35	0.62	--	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11510.00	50.10	74.00	-23.90	58.39	40.10	16.75	65.73	0.59	--	PEAK																																																																																																																													
2	11510.00	39.81	54.00	-14.19	48.10	40.10	16.75	65.73	0.59	--	AVERAGE																																																																																																																													
3	17265.00	52.36	68.20	-15.84	54.38	40.66	21.05	64.35	0.62	--	PEAK																																																																																																																													

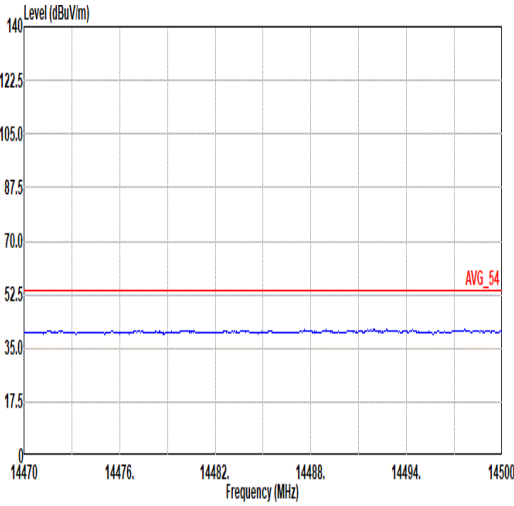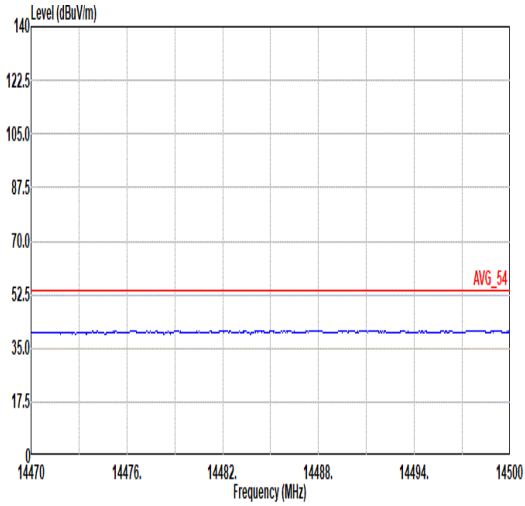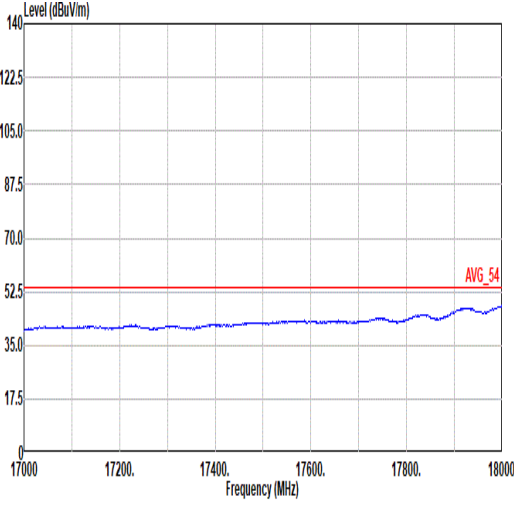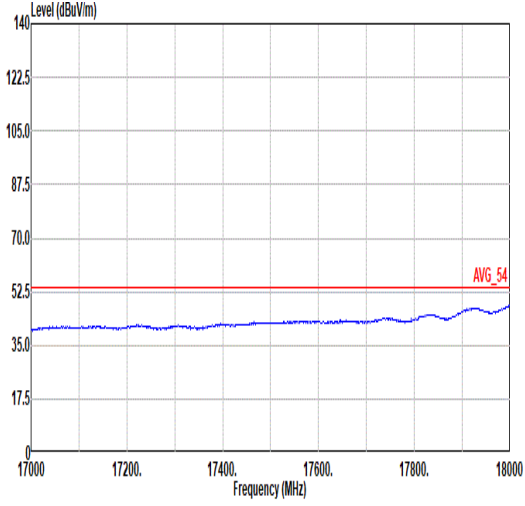


Mode	19	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL
17G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL

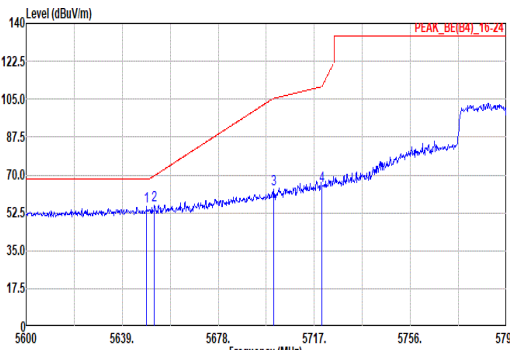
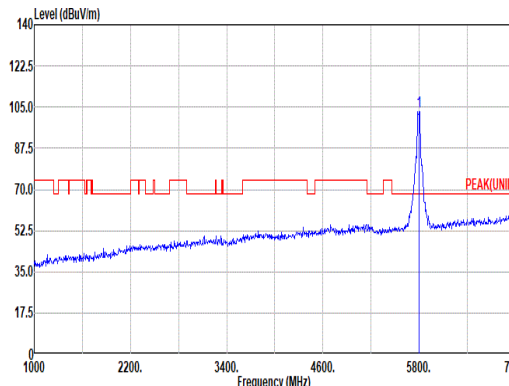
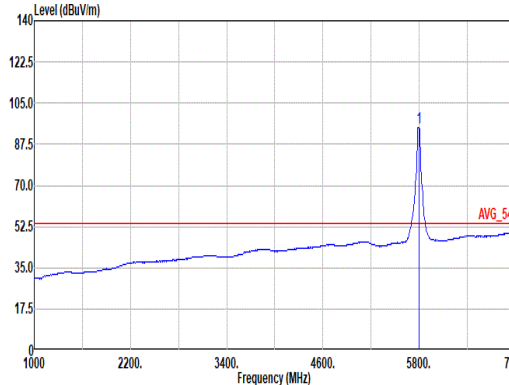


Mode	20																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5648.95</td><td>55.39</td><td>68.20</td><td>-12.81</td><td>41.59</td><td>31.90</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>2</td><td>5652.07</td><td>55.83</td><td>69.73</td><td>-13.90</td><td>42.02</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>3</td><td>5700.43</td><td>63.00</td><td>105.32</td><td>-41.72</td><td>49.57</td><td>32.10</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>4</td><td>5728.12</td><td>65.14</td><td>111.07</td><td>-45.93</td><td>51.10</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.95	55.39	68.20	-12.81	41.59	31.90	11.70	29.80	0.00	100	182	PEAK	2	5652.07	55.83	69.73	-13.90	42.02	31.91	11.70	29.80	0.00	100	182	PEAK	3	5700.43	63.00	105.32	-41.72	49.57	32.10	11.76	29.83	0.00	100	182	PEAK	4	5728.12	65.14	111.07	-45.93	51.10	32.10	11.78	29.84	0.00	100	182	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>103.20</td><td>-----</td><td>-----</td><td>89.07</td><td>32.16</td><td>11.84</td><td>29.87</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	103.20	-----	-----	89.07	32.16	11.84	29.87	0.00	100	182	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5648.95	55.39	68.20	-12.81	41.59	31.90	11.70	29.80	0.00	100	182	PEAK																																																																																																																													
2	5652.07	55.83	69.73	-13.90	42.02	31.91	11.70	29.80	0.00	100	182	PEAK																																																																																																																													
3	5700.43	63.00	105.32	-41.72	49.57	32.10	11.76	29.83	0.00	100	182	PEAK																																																																																																																													
4	5728.12	65.14	111.07	-45.93	51.10	32.10	11.78	29.84	0.00	100	182	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5795.00	103.20	-----	-----	89.07	32.16	11.84	29.87	0.00	100	182	PEAK																																																																																																																													
Avg	Blank						 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.560kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>94.51</td><td>-----</td><td>-----</td><td>80.36</td><td>32.18</td><td>11.85</td><td>29.88</td><td>0.00</td><td>100</td><td>182</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	94.51	-----	-----	80.36	32.18	11.85	29.88	0.00	100	182	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5795.00	94.51	-----	-----	80.36	32.18	11.85	29.88	0.00	100	182	AVERAGE																																																																																																																													

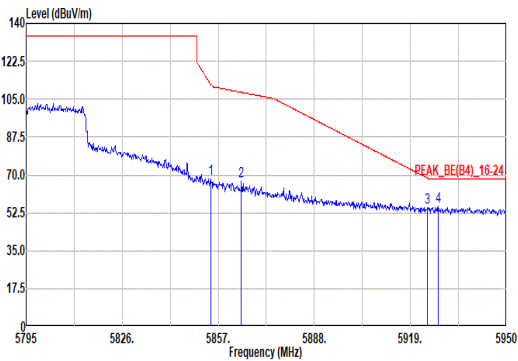


Mode	20																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.52</td><td>68.19</td><td>111.89</td><td>-43.70</td><td>53.78</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 100 182 PEAK</td></tr><tr><td>2</td><td>5864.44</td><td>66.88</td><td>108.15</td><td>-41.27</td><td>52.43</td><td>32.46</td><td>11.91</td><td>29.92</td><td>0.00 100 182 PEAK</td></tr><tr><td>3</td><td>5924.58</td><td>54.71</td><td>68.51</td><td>-13.80</td><td>40.05</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 100 182 PEAK</td></tr><tr><td>4</td><td>5927.99</td><td>55.44</td><td>68.20</td><td>-12.76</td><td>40.77</td><td>32.66</td><td>11.97</td><td>29.96</td><td>0.00 100 182 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.52	68.19	111.89	-43.70	53.78	32.42	11.91	29.92	0.00 100 182 PEAK	2	5864.44	66.88	108.15	-41.27	52.43	32.46	11.91	29.92	0.00 100 182 PEAK	3	5924.58	54.71	68.51	-13.80	40.05	32.65	11.97	29.96	0.00 100 182 PEAK	4	5927.99	55.44	68.20	-12.76	40.77	32.66	11.97	29.96	0.00 100 182 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.52	68.19	111.89	-43.70	53.78	32.42	11.91	29.92	0.00 100 182 PEAK																																																															
2	5864.44	66.88	108.15	-41.27	52.43	32.46	11.91	29.92	0.00 100 182 PEAK																																																															
3	5924.58	54.71	68.51	-13.80	40.05	32.65	11.97	29.96	0.00 100 182 PEAK																																																															
4	5927.99	55.44	68.20	-12.76	40.77	32.66	11.97	29.96	0.00 100 182 PEAK																																																															

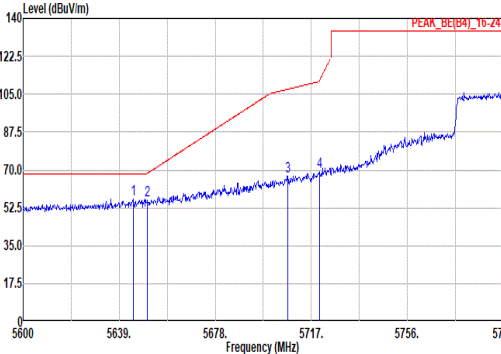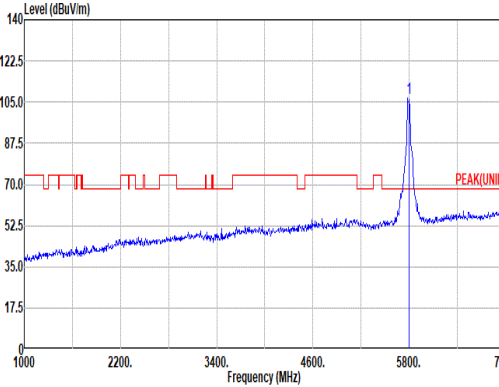
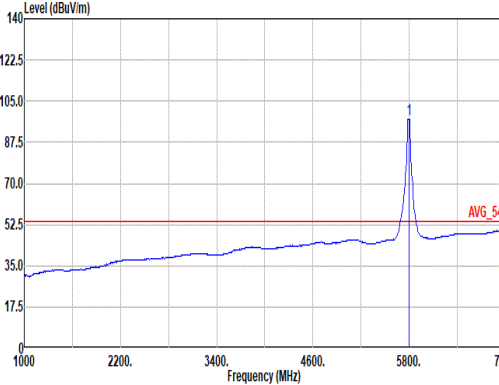


Mode	20																																																																																																																																															
	Band Edge - L																																																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																															
Pol.	Vertical						Fundamental																																																																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16-24 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5644.66</td><td>56.68</td><td>68.20</td><td>-11.52</td><td>42.89</td><td>31.88</td><td>11.70</td><td>29.79</td><td>0.00</td><td>264</td><td>221 PEAK</td></tr><tr><td>2</td><td>5650.51</td><td>56.04</td><td>68.58</td><td>-12.54</td><td>42.24</td><td>31.90</td><td>11.70</td><td>29.80</td><td>0.00</td><td>264</td><td>221 PEAK</td></tr><tr><td>3</td><td>5707.45</td><td>66.97</td><td>107.29</td><td>-40.32</td><td>52.94</td><td>32.10</td><td>11.76</td><td>29.83</td><td>0.00</td><td>264</td><td>221 PEAK</td></tr><tr><td>4</td><td>5728.32</td><td>69.22</td><td>111.52</td><td>-42.30</td><td>55.18</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>264</td><td>221 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5644.66	56.68	68.20	-11.52	42.89	31.88	11.70	29.79	0.00	264	221 PEAK	2	5650.51	56.04	68.58	-12.54	42.24	31.90	11.70	29.80	0.00	264	221 PEAK	3	5707.45	66.97	107.29	-40.32	52.94	32.10	11.76	29.83	0.00	264	221 PEAK	4	5728.32	69.22	111.52	-42.30	55.18	32.10	11.78	29.84	0.00	264	221 PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII) Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>106.45</td><td>-----</td><td>-----</td><td>92.34</td><td>32.15</td><td>11.83</td><td>29.87</td><td>0.00</td><td>264</td><td>221 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5795.00	106.45	-----	-----	92.34	32.15	11.83	29.87	0.00	264	221 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5644.66	56.68	68.20	-11.52	42.89	31.88	11.70	29.79	0.00	264	221 PEAK																																																																																																																																					
2	5650.51	56.04	68.58	-12.54	42.24	31.90	11.70	29.80	0.00	264	221 PEAK																																																																																																																																					
3	5707.45	66.97	107.29	-40.32	52.94	32.10	11.76	29.83	0.00	264	221 PEAK																																																																																																																																					
4	5728.32	69.22	111.52	-42.30	55.18	32.10	11.78	29.84	0.00	264	221 PEAK																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5795.00	106.45	-----	-----	92.34	32.15	11.83	29.87	0.00	264	221 PEAK																																																																																																																																					
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.560kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>97.37</td><td>-----</td><td>-----</td><td>83.22</td><td>32.18</td><td>11.85</td><td>29.88</td><td>0.00</td><td>264</td><td>221 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5795.00	97.37	-----	-----	83.22	32.18	11.85	29.88	0.00	264	221 AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	5795.00	97.37	-----	-----	83.22	32.18	11.85	29.88	0.00	264	221 AVERAGE																																																																																																																																					




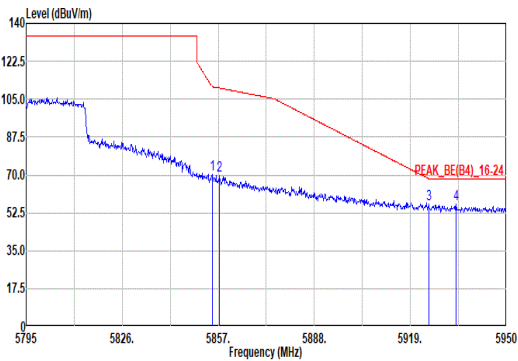


Mode	20																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.99</td><td>70.15</td><td>110.83</td><td>-40.68</td><td>55.74</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 264 221 PEAK</td></tr><tr><td>2</td><td>5857.47</td><td>69.85</td><td>110.11</td><td>-40.26</td><td>55.43</td><td>32.43</td><td>11.91</td><td>29.92</td><td>0.00 264 221 PEAK</td></tr><tr><td>3</td><td>5924.09</td><td>56.46</td><td>68.28</td><td>-11.82</td><td>41.80</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 264 221 PEAK</td></tr><tr><td>4</td><td>5933.73</td><td>56.71</td><td>68.20</td><td>-11.49</td><td>42.03</td><td>32.67</td><td>11.97</td><td>29.96</td><td>0.00 264 221 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.99	70.15	110.83	-40.68	55.74	32.42	11.91	29.92	0.00 264 221 PEAK	2	5857.47	69.85	110.11	-40.26	55.43	32.43	11.91	29.92	0.00 264 221 PEAK	3	5924.09	56.46	68.28	-11.82	41.80	32.65	11.97	29.96	0.00 264 221 PEAK	4	5933.73	56.71	68.20	-11.49	42.03	32.67	11.97	29.96	0.00 264 221 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.99	70.15	110.83	-40.68	55.74	32.42	11.91	29.92	0.00 264 221 PEAK																																																															
2	5857.47	69.85	110.11	-40.26	55.43	32.43	11.91	29.92	0.00 264 221 PEAK																																																															
3	5924.09	56.46	68.28	-11.82	41.80	32.65	11.97	29.96	0.00 264 221 PEAK																																																															
4	5933.73	56.71	68.20	-11.49	42.03	32.67	11.97	29.96	0.00 264 221 PEAK																																																															


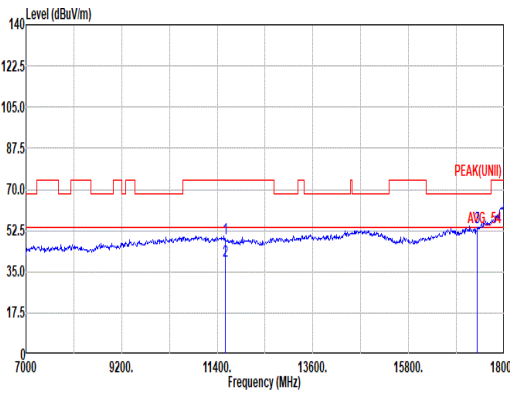
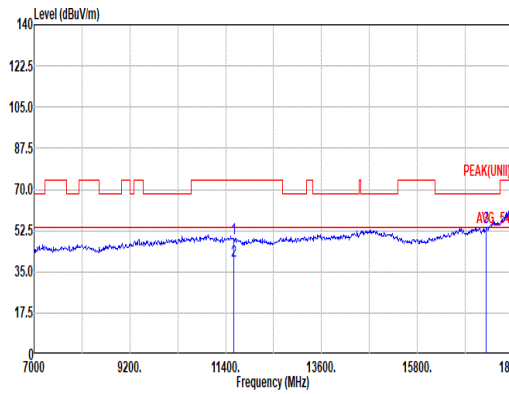


Mode	20																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>49.12</td><td>74.00</td><td>-24.88</td><td>57.70</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>88</td><td>PEAK</td></tr><tr><td>2</td><td>11590.00</td><td>39.52</td><td>54.00</td><td>-14.48</td><td>48.10</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>88</td><td>AVERAGE</td></tr><tr><td>3</td><td>17385.00</td><td>53.84</td><td>68.20</td><td>-14.36</td><td>54.56</td><td>41.48</td><td>21.21</td><td>64.03</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	49.12	74.00	-24.88	57.70	39.78	16.82	65.76	0.58	100	88	PEAK	2	11590.00	39.52	54.00	-14.48	48.10	39.78	16.82	65.76	0.58	100	88	AVERAGE	3	17385.00	53.84	68.20	-14.36	54.56	41.48	21.21	64.03	0.62	--	--	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>57.95</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>104</td><td>PEAK</td></tr><tr><td>2</td><td>11590.00</td><td>39.58</td><td>54.00</td><td>-14.42</td><td>48.16</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>104</td><td>AVERAGE</td></tr><tr><td>3</td><td>17385.00</td><td>53.88</td><td>68.20</td><td>-14.32</td><td>54.60</td><td>41.48</td><td>21.21</td><td>64.03</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	49.37	74.00	-24.63	57.95	39.78	16.82	65.76	0.58	100	104	PEAK	2	11590.00	39.58	54.00	-14.42	48.16	39.78	16.82	65.76	0.58	100	104	AVERAGE	3	17385.00	53.88	68.20	-14.32	54.60	41.48	21.21	64.03	0.62	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11590.00	49.12	74.00	-24.88	57.70	39.78	16.82	65.76	0.58	100	88	PEAK																																																																																																																																		
2	11590.00	39.52	54.00	-14.48	48.10	39.78	16.82	65.76	0.58	100	88	AVERAGE																																																																																																																																		
3	17385.00	53.84	68.20	-14.36	54.56	41.48	21.21	64.03	0.62	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11590.00	49.37	74.00	-24.63	57.95	39.78	16.82	65.76	0.58	100	104	PEAK																																																																																																																																		
2	11590.00	39.58	54.00	-14.42	48.16	39.78	16.82	65.76	0.58	100	104	AVERAGE																																																																																																																																		
3	17385.00	53.88	68.20	-14.32	54.60	41.48	21.21	64.03	0.62	--	--	PEAK																																																																																																																																		

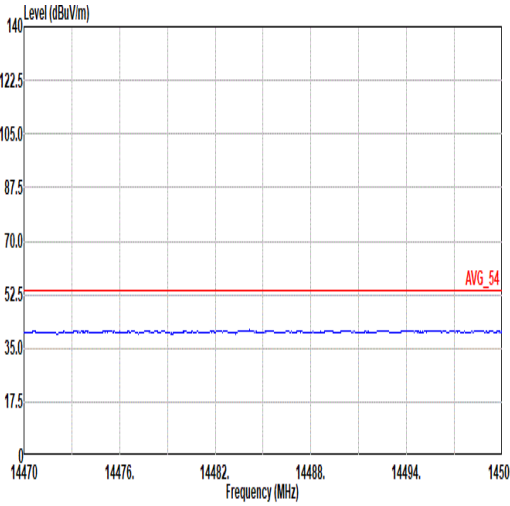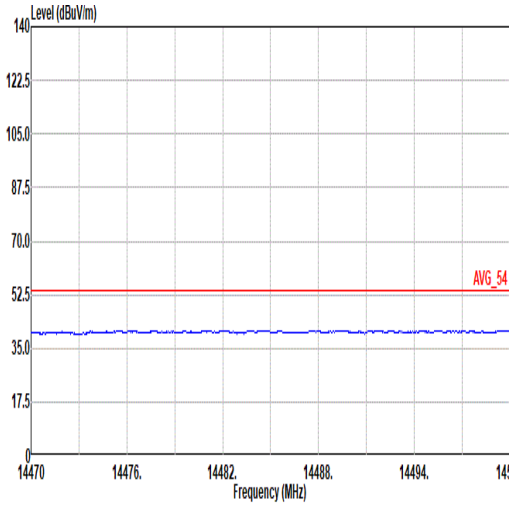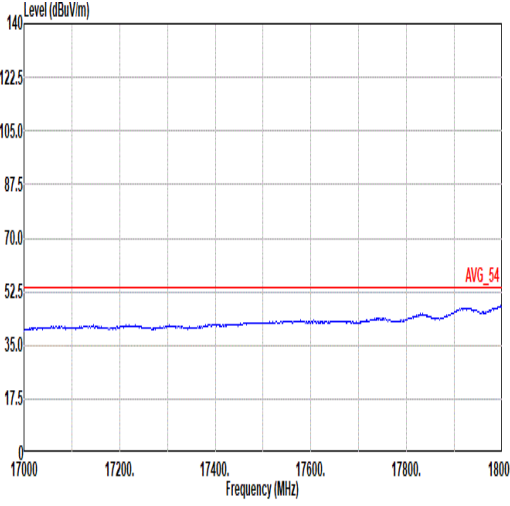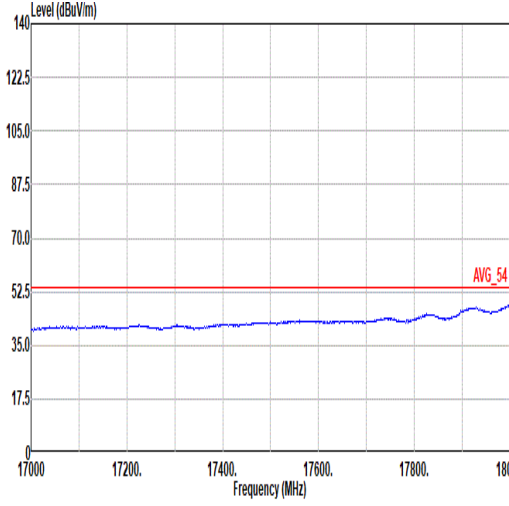


Mode	20	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL
17G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL

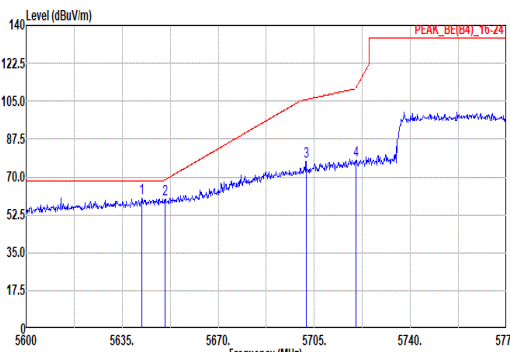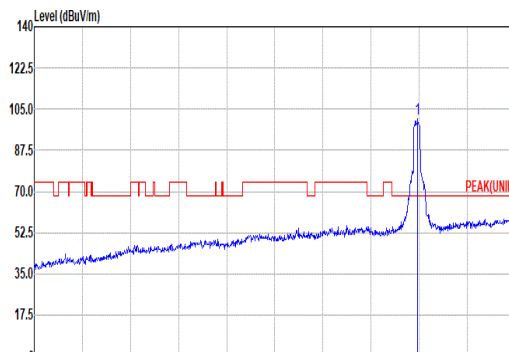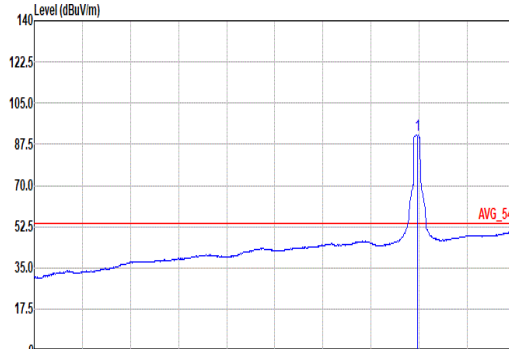

Mode	21																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5642.18</td><td>60.25</td><td>68.20</td><td>-7.95</td><td>46.48</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>100 181 PEAK</td></tr><tr><td>2 5690.58</td><td>59.55</td><td>68.63</td><td>-9.08</td><td>45.75</td><td>31.90</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100 181 PEAK</td></tr><tr><td>3 5702.03</td><td>77.28</td><td>105.77</td><td>-28.49</td><td>63.25</td><td>32.10</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100 181 PEAK</td></tr><tr><td>4 5728.05</td><td>77.44</td><td>110.91</td><td>-33.47</td><td>63.40</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100 181 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5642.18	60.25	68.20	-7.95	46.48	31.87	11.69	29.79	0.00	100 181 PEAK	2 5690.58	59.55	68.63	-9.08	45.75	31.90	11.70	29.80	0.00	100 181 PEAK	3 5702.03	77.28	105.77	-28.49	63.25	32.10	11.76	29.83	0.00	100 181 PEAK	4 5728.05	77.44	110.91	-33.47	63.40	32.10	11.78	29.84	0.00	100 181 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5775.00</td><td>100.75</td><td>-----</td><td>86.62</td><td>32.16</td><td>11.84</td><td>29.87</td><td>0.00</td><td>100</td><td>181 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5775.00	100.75	-----	86.62	32.16	11.84	29.87	0.00	100	181 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5642.18	60.25	68.20	-7.95	46.48	31.87	11.69	29.79	0.00	100 181 PEAK																																																																																																							
2 5690.58	59.55	68.63	-9.08	45.75	31.90	11.70	29.80	0.00	100 181 PEAK																																																																																																							
3 5702.03	77.28	105.77	-28.49	63.25	32.10	11.76	29.83	0.00	100 181 PEAK																																																																																																							
4 5728.05	77.44	110.91	-33.47	63.40	32.10	11.78	29.84	0.00	100 181 PEAK																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5775.00	100.75	-----	86.62	32.16	11.84	29.87	0.00	100	181 PEAK																																																																																																							
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:1.100kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5775.00</td><td>91.57</td><td>-----</td><td>77.48</td><td>32.13</td><td>11.82</td><td>29.86</td><td>0.00</td><td>100</td><td>181 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5775.00	91.57	-----	77.48	32.13	11.82	29.86	0.00	100	181 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5775.00	91.57	-----	77.48	32.13	11.82	29.86	0.00	100	181 AVERAGE																																																																																																							

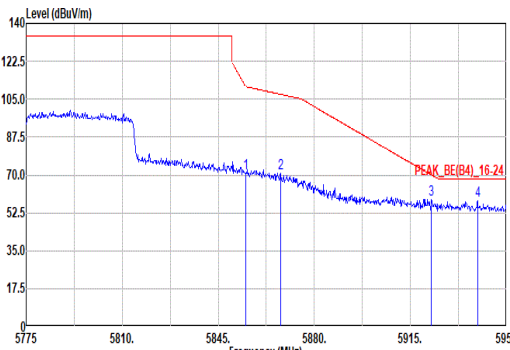


Mode	21																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.98</td><td>70.79</td><td>110.86</td><td>-40.07</td><td>56.38</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 100 181 PEAK</td></tr><tr><td>2</td><td>5867.75</td><td>70.75</td><td>107.23</td><td>-36.48</td><td>56.28</td><td>32.47</td><td>11.92</td><td>29.92</td><td>0.00 100 181 PEAK</td></tr><tr><td>3</td><td>5922.70</td><td>58.45</td><td>69.09</td><td>-11.44</td><td>43.00</td><td>32.65</td><td>11.96</td><td>29.96</td><td>0.00 100 181 PEAK</td></tr><tr><td>4</td><td>5939.50</td><td>58.25</td><td>68.20</td><td>-9.95</td><td>43.55</td><td>32.68</td><td>11.98</td><td>29.96</td><td>0.00 100 181 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.98	70.79	110.86	-40.07	56.38	32.42	11.91	29.92	0.00 100 181 PEAK	2	5867.75	70.75	107.23	-36.48	56.28	32.47	11.92	29.92	0.00 100 181 PEAK	3	5922.70	58.45	69.09	-11.44	43.00	32.65	11.96	29.96	0.00 100 181 PEAK	4	5939.50	58.25	68.20	-9.95	43.55	32.68	11.98	29.96	0.00 100 181 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.98	70.79	110.86	-40.07	56.38	32.42	11.91	29.92	0.00 100 181 PEAK																																																															
2	5867.75	70.75	107.23	-36.48	56.28	32.47	11.92	29.92	0.00 100 181 PEAK																																																															
3	5922.70	58.45	69.09	-11.44	43.00	32.65	11.96	29.96	0.00 100 181 PEAK																																																															
4	5939.50	58.25	68.20	-9.95	43.55	32.68	11.98	29.96	0.00 100 181 PEAK																																																															





		21										
Mode		Band Edge - L										
		U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz										
Pol.		Fundamental										
Peak		Vertical										
		<										




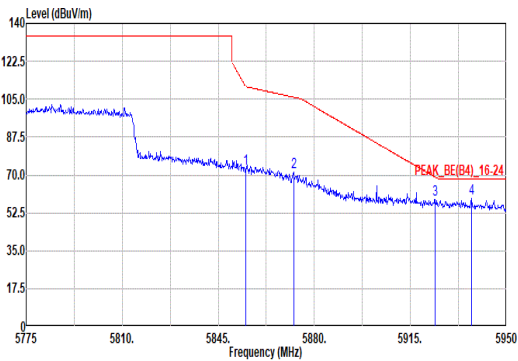


Mode	21																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.98</td><td>73.16</td><td>110.86</td><td>-37.70</td><td>58.75</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 276 220 PEAK</td></tr><tr><td>2</td><td>5872.48</td><td>71.51</td><td>105.91</td><td>-34.40</td><td>57.03</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00 276 220 PEAK</td></tr><tr><td>3</td><td>5923.93</td><td>58.78</td><td>68.99</td><td>-10.21</td><td>44.12</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 276 220 PEAK</td></tr><tr><td>4</td><td>5937.23</td><td>59.30</td><td>68.20</td><td>-8.90</td><td>44.61</td><td>32.67</td><td>11.98</td><td>29.96</td><td>0.00 276 220 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.98	73.16	110.86	-37.70	58.75	32.42	11.91	29.92	0.00 276 220 PEAK	2	5872.48	71.51	105.91	-34.40	57.03	32.49	11.92	29.93	0.00 276 220 PEAK	3	5923.93	58.78	68.99	-10.21	44.12	32.65	11.97	29.96	0.00 276 220 PEAK	4	5937.23	59.30	68.20	-8.90	44.61	32.67	11.98	29.96	0.00 276 220 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.98	73.16	110.86	-37.70	58.75	32.42	11.91	29.92	0.00 276 220 PEAK																																																															
2	5872.48	71.51	105.91	-34.40	57.03	32.49	11.92	29.93	0.00 276 220 PEAK																																																															
3	5923.93	58.78	68.99	-10.21	44.12	32.65	11.97	29.96	0.00 276 220 PEAK																																																															
4	5937.23	59.30	68.20	-8.90	44.61	32.67	11.98	29.96	0.00 276 220 PEAK																																																															



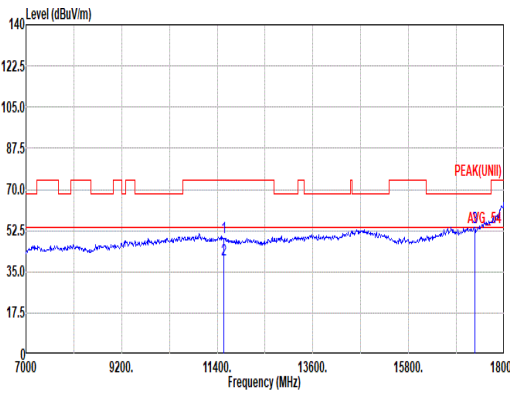
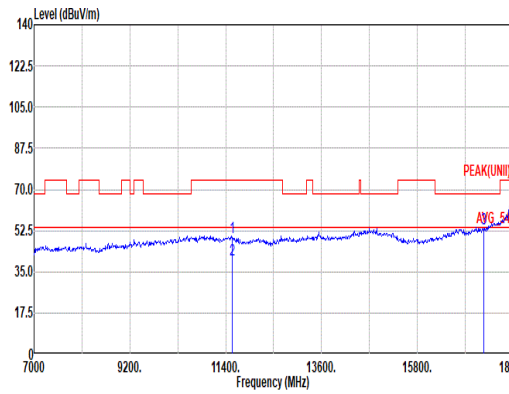


Mode	21																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11550.00</td><td>49.55</td><td>74.00</td><td>-24.45</td><td>57.83</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>200</td><td>207</td><td>PEAK</td></tr><tr><td>2</td><td>11550.00</td><td>40.14</td><td>54.00</td><td>-13.86</td><td>48.42</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>200</td><td>207</td><td>AVERAGE</td></tr><tr><td>3</td><td>17325.00</td><td>54.06</td><td>68.20</td><td>-14.14</td><td>55.50</td><td>41.00</td><td>21.13</td><td>64.19</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	49.55	74.00	-24.45	57.83	40.10	16.78	65.75	0.59	200	207	PEAK	2	11550.00	40.14	54.00	-13.86	48.42	40.10	16.78	65.75	0.59	200	207	AVERAGE	3	17325.00	54.06	68.20	-14.14	55.50	41.00	21.13	64.19	0.62	--	--	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11550.00</td><td>49.46</td><td>74.00</td><td>-24.54</td><td>57.74</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>300</td><td>275</td><td>PEAK</td></tr><tr><td>2</td><td>11550.00</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>48.43</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>300</td><td>275</td><td>AVERAGE</td></tr><tr><td>3</td><td>17325.00</td><td>53.39</td><td>68.20</td><td>-14.81</td><td>54.83</td><td>41.00</td><td>21.13</td><td>64.19</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	49.46	74.00	-24.54	57.74	40.10	16.78	65.75	0.59	300	275	PEAK	2	11550.00	40.15	54.00	-13.85	48.43	40.10	16.78	65.75	0.59	300	275	AVERAGE	3	17325.00	53.39	68.20	-14.81	54.83	41.00	21.13	64.19	0.62	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11550.00	49.55	74.00	-24.45	57.83	40.10	16.78	65.75	0.59	200	207	PEAK																																																																																																																																		
2	11550.00	40.14	54.00	-13.86	48.42	40.10	16.78	65.75	0.59	200	207	AVERAGE																																																																																																																																		
3	17325.00	54.06	68.20	-14.14	55.50	41.00	21.13	64.19	0.62	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11550.00	49.46	74.00	-24.54	57.74	40.10	16.78	65.75	0.59	300	275	PEAK																																																																																																																																		
2	11550.00	40.15	54.00	-13.85	48.43	40.10	16.78	65.75	0.59	300	275	AVERAGE																																																																																																																																		
3	17325.00	53.39	68.20	-14.81	54.83	41.00	21.13	64.19	0.62	--	--	PEAK																																																																																																																																		

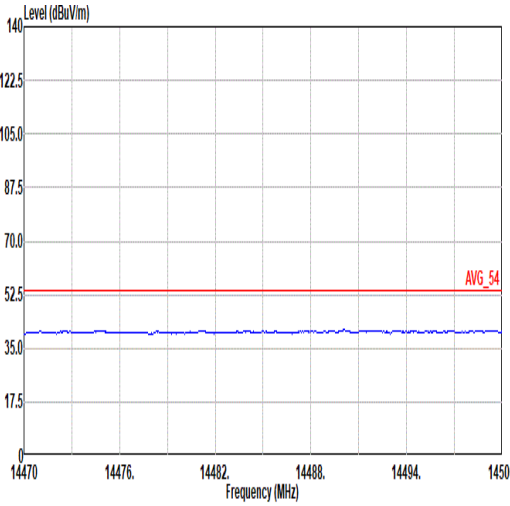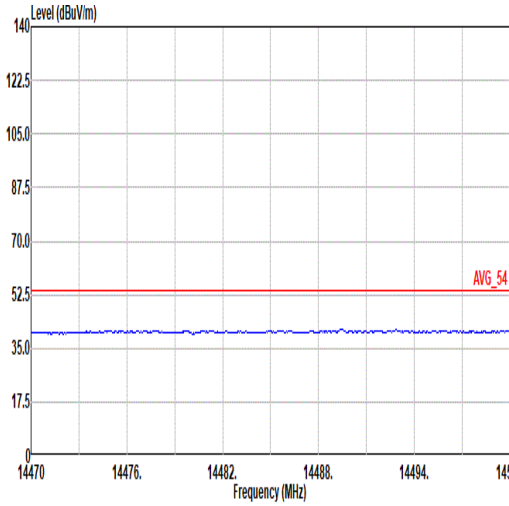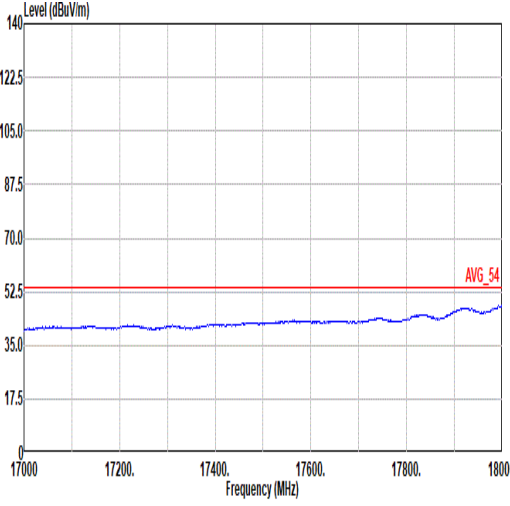
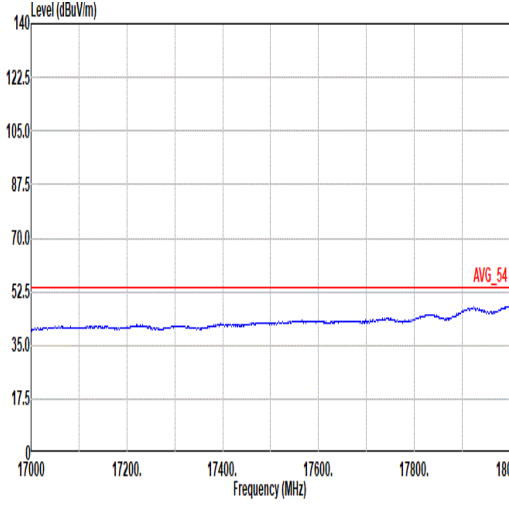


Mode	21	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL
17G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL

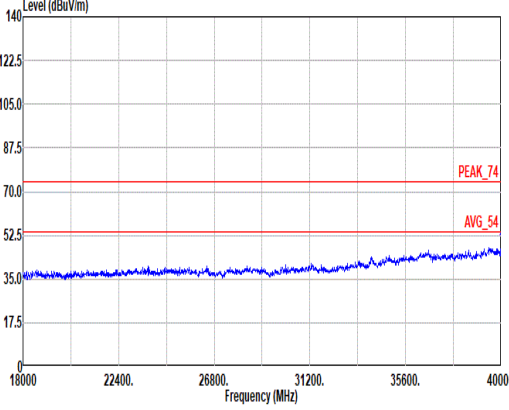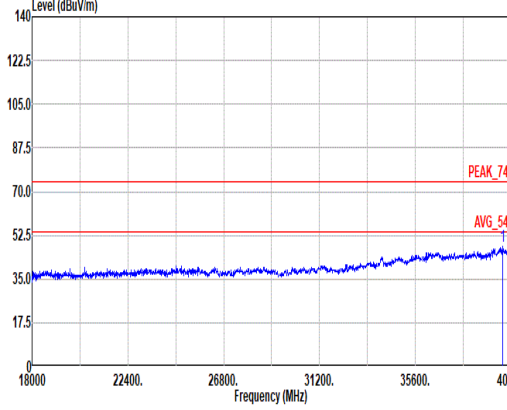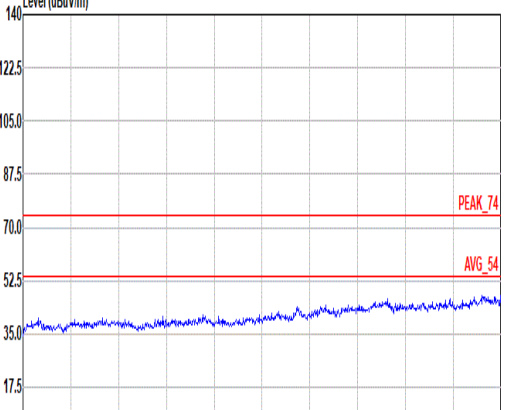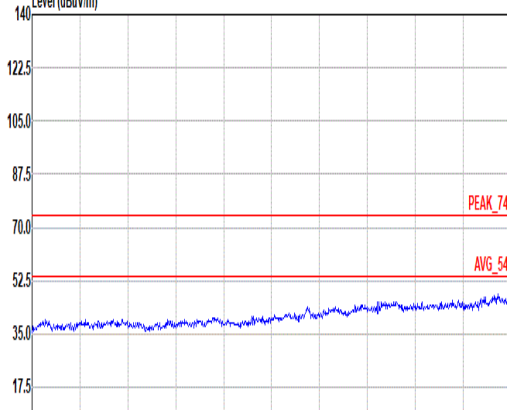

Mode	22																																																																																																			
	SHF																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>39989.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>59.34</td><td>44.67</td><td>8.44</td><td>55.42</td><td>-9.54</td><td>-- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	39989.00	47.49	74.00	-26.51	59.34	44.67	8.44	55.42	-9.54	-- -- Peak	 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>39604.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>59.36</td><td>45.15</td><td>8.90</td><td>56.03</td><td>-9.54</td><td>-- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	39604.00	47.84	74.00	-26.16	59.36	45.15	8.90	56.03	-9.54	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																											
1	39989.00	47.49	74.00	-26.51	59.34	44.67	8.44	55.42	-9.54	-- -- Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																											
1	39604.00	47.84	74.00	-26.16	59.36	45.15	8.90	56.03	-9.54	-- -- Peak																																																																																										
Avg	 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 HORIZONTAL						 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 VERTICAL																																																																																													

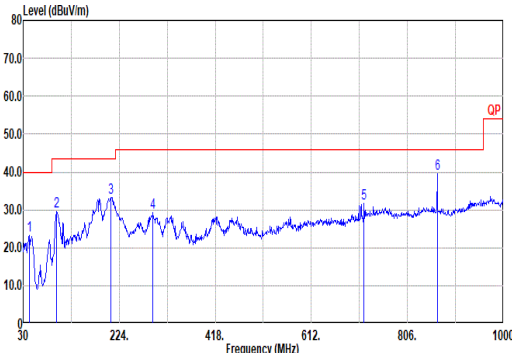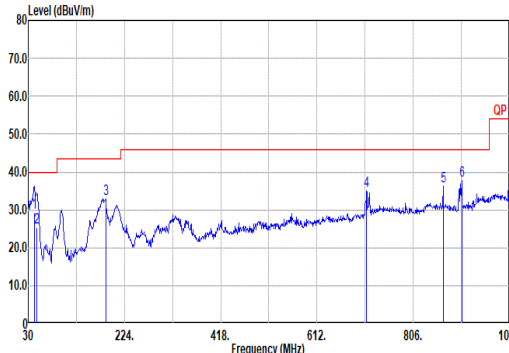



Mode	23																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_241005 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>42.61</td><td>23.24</td><td>40.00</td><td>-16.76</td><td>36.54</td><td>18.15</td><td>1.01</td><td>32.51</td><td>0.05 -- -- Peak</td></tr><tr><td>2</td><td>96.93</td><td>29.44</td><td>43.50</td><td>-14.06</td><td>44.66</td><td>15.71</td><td>1.51</td><td>32.51</td><td>0.07 -- -- Peak</td></tr><tr><td>3</td><td>207.51</td><td>33.34</td><td>43.50</td><td>-10.16</td><td>48.29</td><td>15.31</td><td>2.24</td><td>32.57</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>291.90</td><td>29.15</td><td>46.00</td><td>-16.85</td><td>39.41</td><td>19.23</td><td>2.64</td><td>32.20</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>718.70</td><td>31.62</td><td>46.00</td><td>-14.38</td><td>32.26</td><td>27.20</td><td>4.17</td><td>32.15</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>866.14</td><td>39.47</td><td>46.00</td><td>-6.53</td><td>37.60</td><td>29.31</td><td>4.59</td><td>32.21</td><td>0.18 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	42.61	23.24	40.00	-16.76	36.54	18.15	1.01	32.51	0.05 -- -- Peak	2	96.93	29.44	43.50	-14.06	44.66	15.71	1.51	32.51	0.07 -- -- Peak	3	207.51	33.34	43.50	-10.16	48.29	15.31	2.24	32.57	0.07 -- -- Peak	4	291.90	29.15	46.00	-16.85	39.41	19.23	2.64	32.20	0.07 -- -- Peak	5	718.70	31.62	46.00	-14.38	32.26	27.20	4.17	32.15	0.14 -- -- Peak	6	866.14	39.47	46.00	-6.53	37.60	29.31	4.59	32.21	0.18 -- -- Peak	 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_241005 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>42.61</td><td>29.26</td><td>40.00</td><td>-10.74</td><td>42.56</td><td>18.15</td><td>1.01</td><td>32.51</td><td>0.05 100 53 QP</td></tr><tr><td>2</td><td>47.46</td><td>25.46</td><td>40.00</td><td>-14.54</td><td>41.07</td><td>15.72</td><td>1.07</td><td>32.45</td><td>0.05 100 99 QP</td></tr><tr><td>3</td><td>186.17</td><td>33.02</td><td>43.50</td><td>-10.48</td><td>48.04</td><td>15.10</td><td>2.12</td><td>32.32</td><td>0.08 -- -- Peak</td></tr><tr><td>4</td><td>711.91</td><td>35.06</td><td>46.00</td><td>-10.94</td><td>36.04</td><td>26.89</td><td>4.15</td><td>32.16</td><td>0.14 -- -- Peak</td></tr><tr><td>5</td><td>866.14</td><td>36.19</td><td>46.00</td><td>-9.81</td><td>34.32</td><td>29.31</td><td>4.59</td><td>32.21</td><td>0.18 -- -- Peak</td></tr><tr><td>6</td><td>903.97</td><td>37.60</td><td>46.00</td><td>-8.40</td><td>35.72</td><td>29.26</td><td>4.68</td><td>32.23</td><td>0.17 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	42.61	29.26	40.00	-10.74	42.56	18.15	1.01	32.51	0.05 100 53 QP	2	47.46	25.46	40.00	-14.54	41.07	15.72	1.07	32.45	0.05 100 99 QP	3	186.17	33.02	43.50	-10.48	48.04	15.10	2.12	32.32	0.08 -- -- Peak	4	711.91	35.06	46.00	-10.94	36.04	26.89	4.15	32.16	0.14 -- -- Peak	5	866.14	36.19	46.00	-9.81	34.32	29.31	4.59	32.21	0.18 -- -- Peak	6	903.97	37.60	46.00	-8.40	35.72	29.26	4.68	32.23	0.17 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	42.61	23.24	40.00	-16.76	36.54	18.15	1.01	32.51	0.05 -- -- Peak																																																																																																																																																																													
2	96.93	29.44	43.50	-14.06	44.66	15.71	1.51	32.51	0.07 -- -- Peak																																																																																																																																																																													
3	207.51	33.34	43.50	-10.16	48.29	15.31	2.24	32.57	0.07 -- -- Peak																																																																																																																																																																													
4	291.90	29.15	46.00	-16.85	39.41	19.23	2.64	32.20	0.07 -- -- Peak																																																																																																																																																																													
5	718.70	31.62	46.00	-14.38	32.26	27.20	4.17	32.15	0.14 -- -- Peak																																																																																																																																																																													
6	866.14	39.47	46.00	-6.53	37.60	29.31	4.59	32.21	0.18 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	42.61	29.26	40.00	-10.74	42.56	18.15	1.01	32.51	0.05 100 53 QP																																																																																																																																																																													
2	47.46	25.46	40.00	-14.54	41.07	15.72	1.07	32.45	0.05 100 99 QP																																																																																																																																																																													
3	186.17	33.02	43.50	-10.48	48.04	15.10	2.12	32.32	0.08 -- -- Peak																																																																																																																																																																													
4	711.91	35.06	46.00	-10.94	36.04	26.89	4.15	32.16	0.14 -- -- Peak																																																																																																																																																																													
5	866.14	36.19	46.00	-9.81	34.32	29.31	4.59	32.21	0.18 -- -- Peak																																																																																																																																																																													
6	903.97	37.60	46.00	-8.40	35.72	29.26	4.68	32.23	0.17 -- -- Peak																																																																																																																																																																													



Appendix D. Duty Cycle Plots


<For Radiated Spurious Emission test>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	90.48	1425	0.70	750Hz
5GHz 802.11n HT20	89.90	1335	0.75	820Hz
5GHz 802.11n HT40	94.30	2480	0.40	430Hz
5GHz 802.11ac VHT80	88.64	1170	0.85	910Hz
5GHz 802.11ax HE20 Full RU	87.66	1044	0.96	1kHz
5GHz 802.11ax HE20 26 RU	83.23	5260	0.19	200Hz
5GHz 802.11ax HE20 52 RU	83.45	5145	0.19	200Hz
5GHz 802.11ax HE20 106 RU	82.60	4770	0.21	220Hz
5GHz 802.11ax HE40 Full RU	92.96	1980	0.51	560Hz
5GHz 802.11ax HE80 Full RU	86.67	975	1.03	1.1KHz

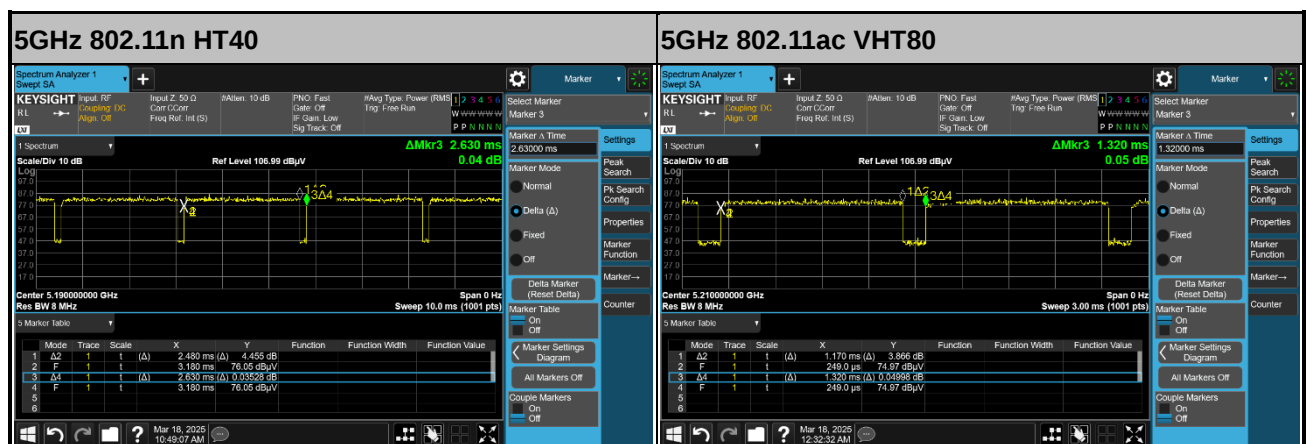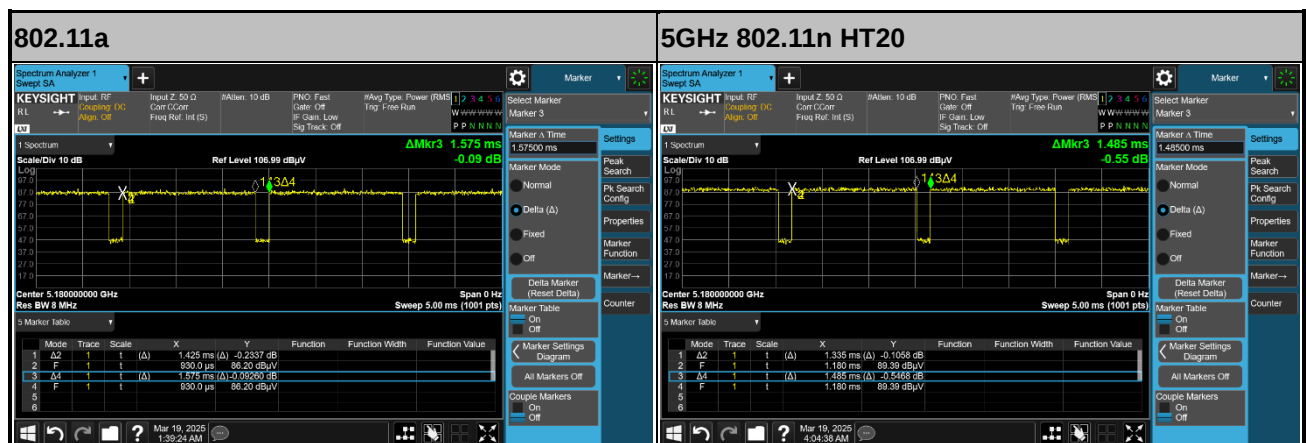





5GHz 802.11ax HE20 Full RU

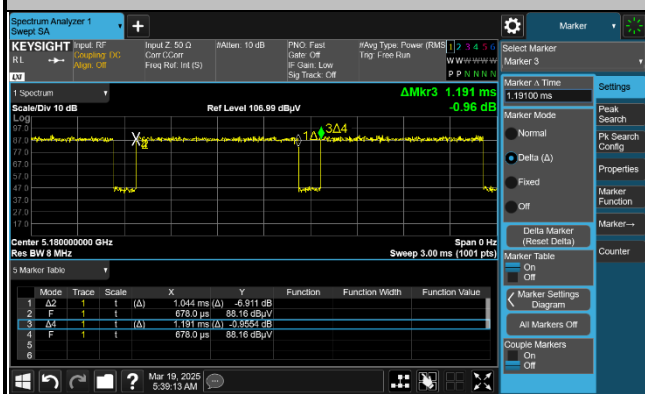


5GHz 802.11ax HE20 26 RU

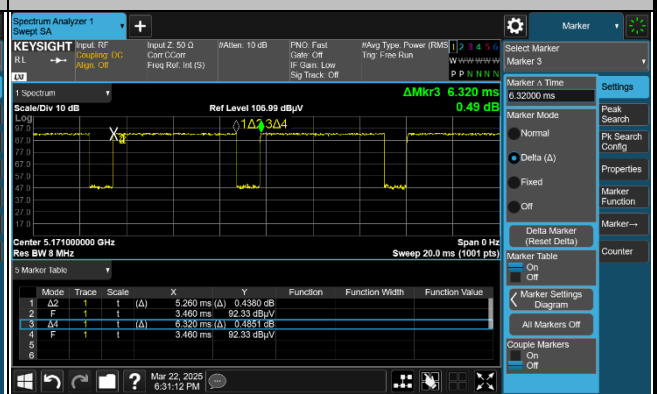


5GHz 802.11ax HE20 52 RU

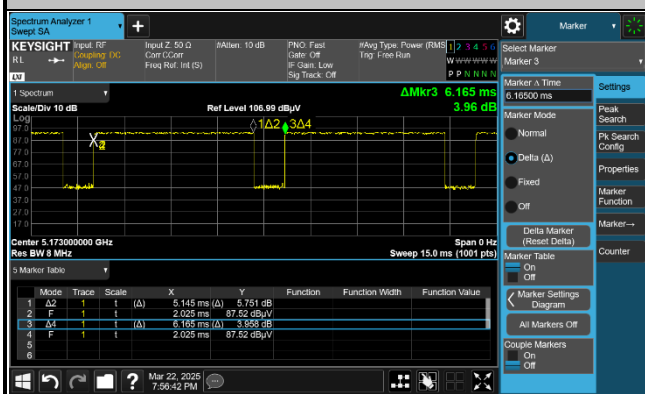


5GHz 802.11ax HE20 106 RU

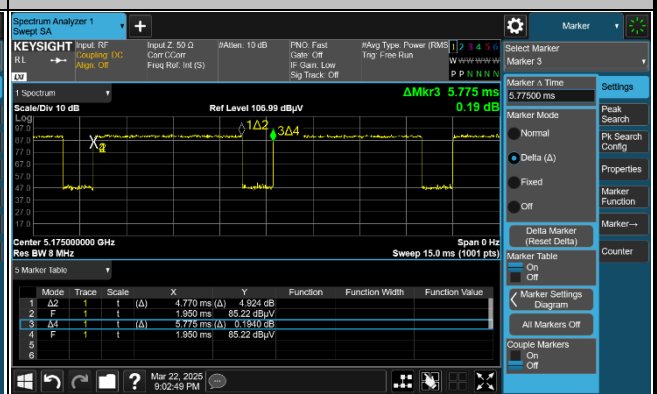

5GHz 802.11ax HE40 Full RU

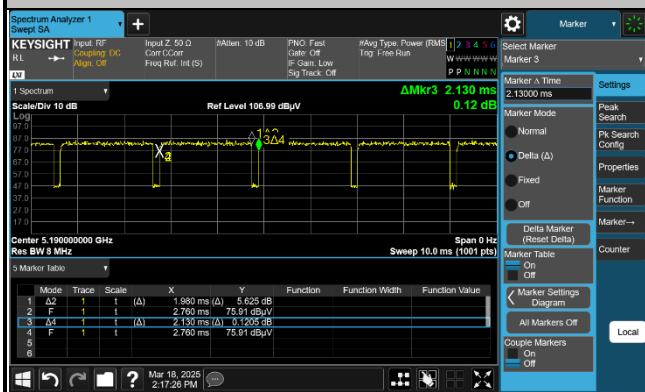


5GHz 802.11ax HE80 Full RU

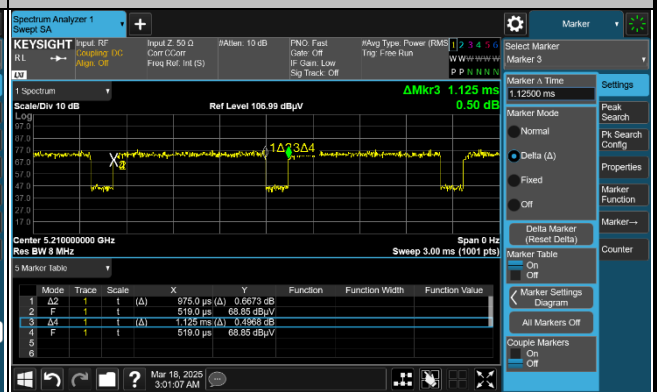

**<For Conducted test>**

Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
For B1~B3			
802.11a	90.53	1424	0.43
5GHz 802.11n HT20	90.14	1334	0.45
5GHz 802.11n HT40	94.38	2484	0.25
5GHz 802.11ac VHT80	88.69	1168	0.52
5GHz 802.11ax HE20 Full RU	87.56	1042	0.58
5GHz 802.11ax HE20 26 RU	84.18	5320	0.75
5GHz 802.11ax HE20 52 RU	83.73	5147	0.77
5GHz 802.11ax HE20 106 RU	82.64	4760	0.83
5GHz 802.11ax HE40 Full RU	92.98	1974	0.32
5GHz 802.11ax HE80 Full RU	86.72	973	0.62
For B4			
802.11a	90.56	1429	0.43
5GHz 802.11n HT20	90.10	1338	0.45
5GHz 802.11n HT40	89.43	1269	0.49
5GHz 802.11ac VHT80	88.65	1172	0.52
5GHz 802.11ax HE20 Full RU	87.59	1045	0.58
5GHz 802.11ax HE20 26 RU	84.14	5307	0.75
5GHz 802.11ax HE20 52 RU	83.73	5146	0.77
5GHz 802.11ax HE20 106 RU	82.68	4773	0.83
5GHz 802.11ax HE40 Full RU	93.00	1979	0.32
5GHz 802.11ax HE80 Full RU	86.69	977	0.62

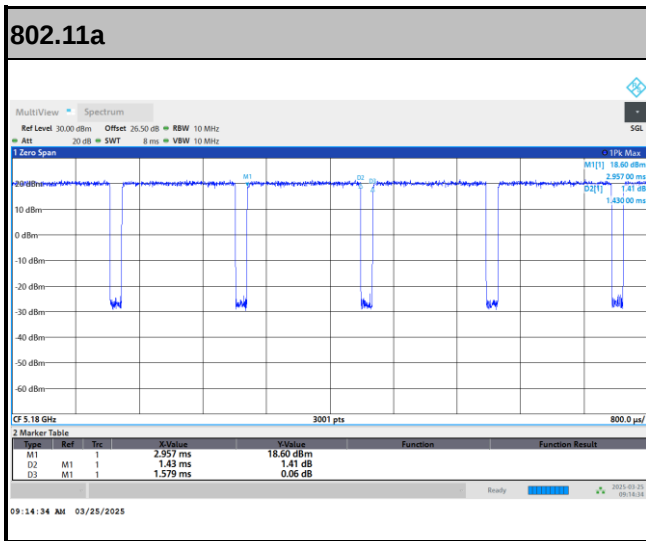



Appendix E. Spot Check Evaluation on GHH4K

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the parent model and tested to demonstrate the test data from original model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry.

Summary for power and RSE spot check for each FCC rule part is listed as below:

Test Item	Mode	A4RGWSQ2 Reference Worst Result	A4RGHH4K Variant Check Result	Difference (dB)
Conducted Power (dBm)	BT	20.43	20.03	0.40
	BLE	19.72	19.66	0.06
	BLE ASK	19.08	18.94	0.14
	BLE GFSK	20.38	19.96	0.42
	WiFi 2.4GHz	20.91	20.88	0.03
	WiFi 5GHz	18.41	17.95	0.46
Radiated Band Edges and Spurious Emission (dBuV/m)	BT	-26.48	-25.75	0.73
	BLE	-6.95	-5.91	1.04
	BLE ASK	-27.29	-27.10	0.19
	BLE GFSK	-3.47	-3.26	0.21
	WiFi 2.4GHz	-1.55	-1.83	0.28
	WiFi 5GHz	-2.10	-3.65	1.55



Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Rule Part & Frequency Band	Reference FCC ID (Parent)	Type Grant/ Permissive Change	Reference Exhibit	Full report referenced	FCC ID Filling (Variant)
15E	NII	WiFi	§15.407 5GHz	A4RGWSQ2	Original Grant	GWSQ2_FCC Part 15E WLAN UNII-1-4	Y	A4RGHH4K



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 28, 2025~ Mar. 31, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Mar. 28, 2025~ Mar. 31, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Mar. 28, 2025~ Mar. 31, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 28, 2025~ Mar. 31, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v rsion_240513	N/A	Conducted Other Test Item	N/A	Mar. 28, 2025~ Mar. 31, 2025	N/A	Conducted (TH05-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1328	1G~18GHz	Dec. 06, 2024	Mar. 27, 2025~ Apr. 16, 2025	Dec. 05, 2025	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 27, 2025	Mar. 27, 2025~ Apr. 16, 2025	Mar. 26, 2026	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 05, 2024	Mar. 27, 2025~ Apr. 16, 2025	Dec. 04, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 24, 2024	Mar. 27, 2025~ Apr. 16, 2025	Dec. 23, 2025	Radiation (03CH16-HY)
Notch Filter	Wainwright	WHKX8-5872.5- 6750-18000-40S T	SN27	6.75GHz High Pass Filter	Dec. 26, 2024	Mar. 27, 2025~ Apr. 16, 2025	Dec. 25, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22, 2024	Mar. 27, 2025~ Apr. 16, 2025	Apr. 21, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-57 57,805935/4,8 02434/4	30MHz~18GHz	Aug. 07, 2024	Mar. 27, 2025~ Apr. 16, 2025	Aug. 06, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,8040 12/2	18-40GHz	Dec. 31, 2024	Mar. 27, 2025~ Apr. 16, 2025	Dec. 30, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Mar. 27, 2025~ Apr. 16, 2025	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Mar. 27, 2025~ Apr. 16, 2025	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Mar. 27, 2025~ Apr. 16, 2025	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Mar. 27, 2025~ Apr. 16, 2025	N/A	Radiation (03CH16-HY)

————THE END————