


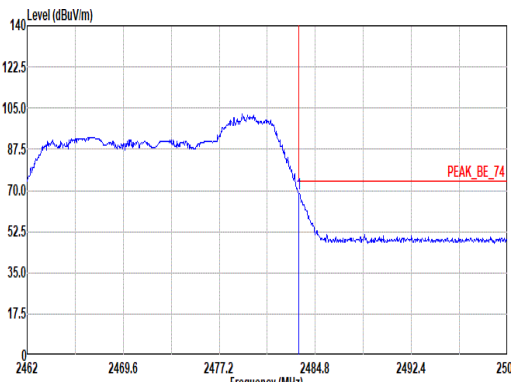
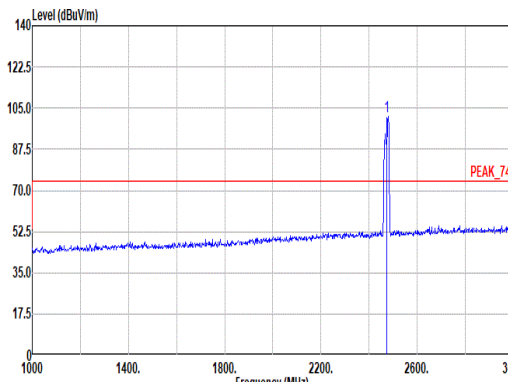
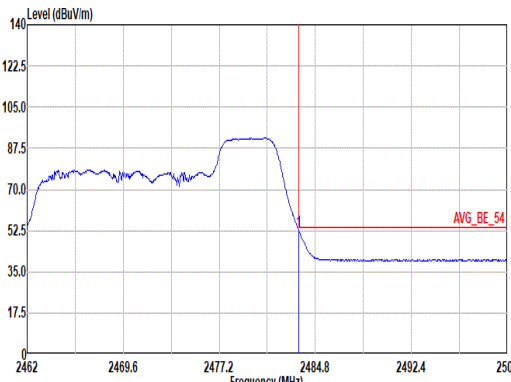
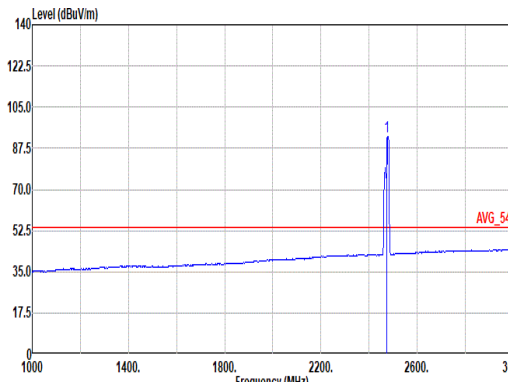
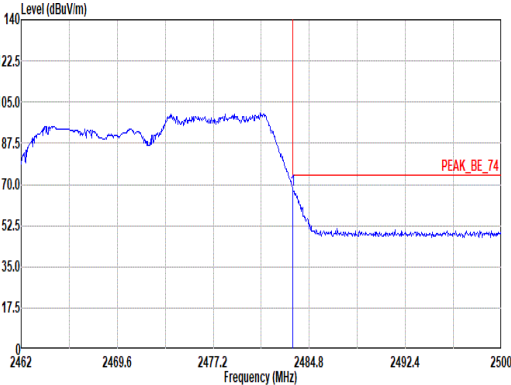





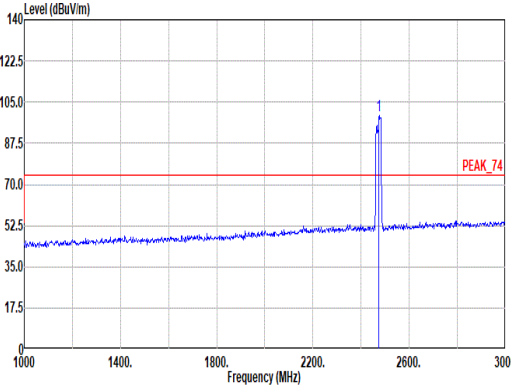


Mode	105																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_802.11ax HE20_CH13_Partial RU 52_2472MHz																																																																																																													
ANT	4+3																																																																																																													
Pol.	Vertical																																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>68.90</td><td>74.00</td><td>-5.10</td><td>56.02</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>273</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	68.90	74.00	-5.10	56.02	26.70	8.80	32.65	10.03	273	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK_74 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2472.00</td><td>101.60</td><td>-----</td><td>-----</td><td>88.72</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>100</td><td>273</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2472.00	101.60	-----	-----	88.72	26.70	8.80	32.65	10.03	100	273	PEAK	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.51	68.90	74.00	-5.10	56.02	26.70	8.80	32.65	10.03	273	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2472.00	101.60	-----	-----	88.72	26.70	8.80	32.65	10.03	100	273	PEAK																																																																																																		
Avg	 Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>52.14</td><td>54.00</td><td>-1.86</td><td>39.26</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>100</td><td>273</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.14	54.00	-1.86	39.26	26.70	8.80	32.65	10.03	100	273	AVERAGE	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2472.00</td><td>92.64</td><td>-----</td><td>-----</td><td>79.76</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>100</td><td>273</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2472.00	92.64	-----	-----	79.76	26.70	8.80	32.65	10.03	100	273	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.51	52.14	54.00	-1.86	39.26	26.70	8.80	32.65	10.03	100	273	AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2472.00	92.64	-----	-----	79.76	26.70	8.80	32.65	10.03	100	273	AVERAGE																																																																																																		


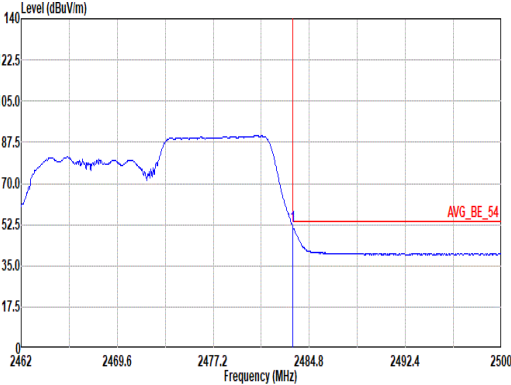


Mode	106																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH13_Partial RU 106_2472MHz																																																																																									
ANT	4+3																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>67.61</td><td>74.00</td><td>-6.39</td><td>54.73</td><td>26.70</td><td>8.00</td><td>32.65</td><td>10.03</td><td>230</td><td>223</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.51	67.61	74.00	-6.39	54.73	26.70	8.00	32.65	10.03	230	223	PEAK	 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2472.00</td><td>99.38</td><td>-----</td><td>-----</td><td>86.53</td><td>26.68</td><td>8.79</td><td>32.65</td><td>10.03</td><td>230</td><td>223</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2472.00	99.38	-----	-----	86.53	26.68	8.79	32.65	10.03	230	223	PEAK
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2483.51	67.61	74.00	-6.39	54.73	26.70	8.00	32.65	10.03	230	223	PEAK																																																																														
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2472.00	99.38	-----	-----	86.53	26.68	8.79	32.65	10.03	230	223	PEAK																																																																														
Avg	 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>51.52</td><td>54.00</td><td>-2.48</td><td>38.64</td><td>26.70</td><td>8.00</td><td>32.65</td><td>10.03</td><td>230</td><td>223</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.51	51.52	54.00	-2.48	38.64	26.70	8.00	32.65	10.03	230	223	AVERAGE	 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2472.00</td><td>91.09</td><td>-----</td><td>-----</td><td>78.21</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>230</td><td>223</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2472.00	91.09	-----	-----	78.21	26.70	8.80	32.65	10.03	230	223	AVERAGE
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2483.51	51.52	54.00	-2.48	38.64	26.70	8.00	32.65	10.03	230	223	AVERAGE																																																																														
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2472.00	91.09	-----	-----	78.21	26.70	8.80	32.65	10.03	230	223	AVERAGE																																																																														

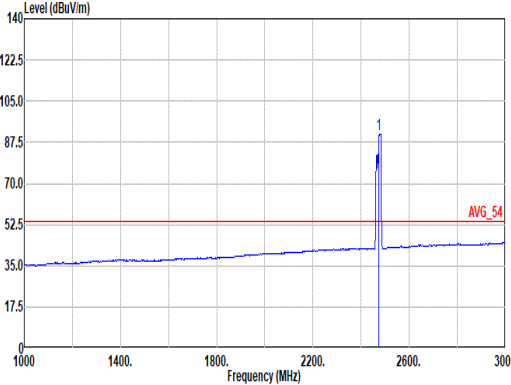

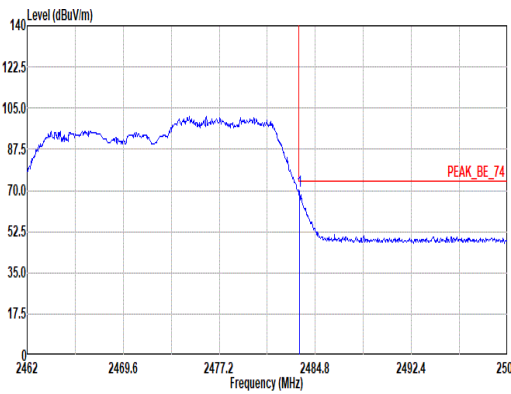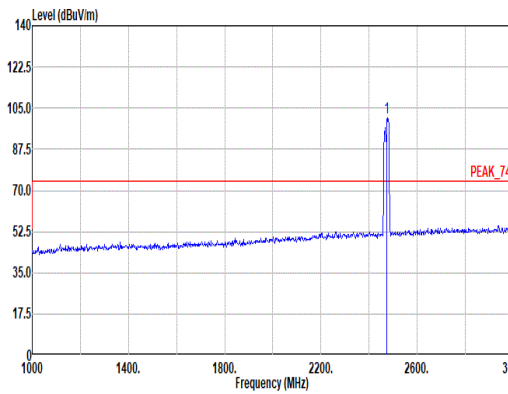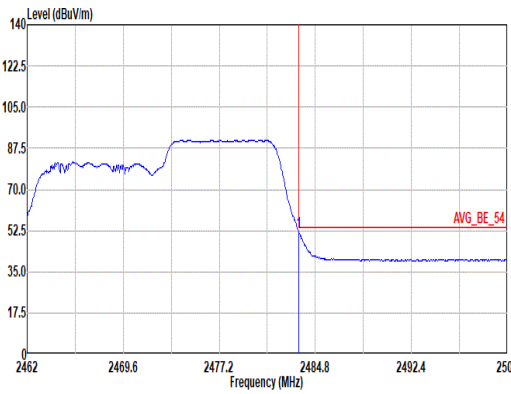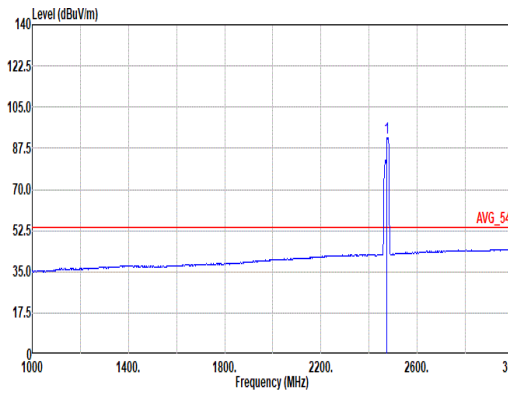Mode	106																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11ax HE20_CH13_Partial RU 106_2472MHz																																																																																																		
ANT	4+3																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>69.56</td><td>74.00</td><td>-4.44</td><td>56.68</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>137</td><td>266</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	69.56	74.00	-4.44	56.68	26.70	8.80	32.65	10.03	137	266	PEAK	Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2472.00</td><td>100.00</td><td>-----</td><td>-----</td><td>87.95</td><td>26.68</td><td>8.79</td><td>32.65</td><td>10.03</td><td>137</td><td>266</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2472.00	100.00	-----	-----	87.95	26.68	8.79	32.65	10.03	137	266
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.55	69.56	74.00	-4.44	56.68	26.70	8.80	32.65	10.03	137	266	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2472.00	100.00	-----	-----	87.95	26.68	8.79	32.65	10.03	137	266	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>51.53</td><td>54.00</td><td>-2.47</td><td>38.65</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>137</td><td>266</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	51.53	54.00	-2.47	38.65	26.70	8.80	32.65	10.03	137	266	AVERAGE	Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_240711 VERTICAL : RBW:1000.000kHz VBN:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2472.00</td><td>91.88</td><td>-----</td><td>-----</td><td>79.00</td><td>26.70</td><td>8.80</td><td>32.65</td><td>10.03</td><td>137</td><td>266</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2472.00	91.88	-----	-----	79.00	26.70	8.80	32.65	10.03	137	266
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.51	51.53	54.00	-2.47	38.65	26.70	8.80	32.65	10.03	137	266	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2472.00	91.88	-----	-----	79.00	26.70	8.80	32.65	10.03	137	266	AVERAGE																																																																																							

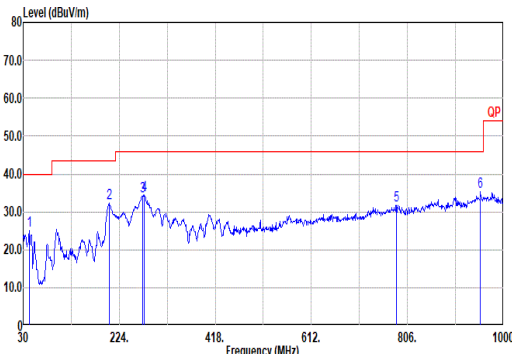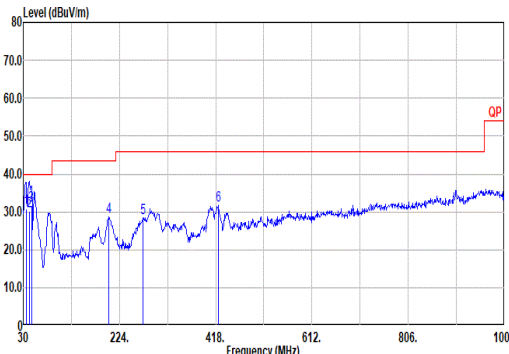

Mode	107																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																																					
ANT	4+3																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 08_241127 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>42.61</td><td>25.18</td><td>40.00</td><td>-14.82</td><td>41.49</td><td>18.05</td><td>1.16</td><td>35.75</td><td>0.23 -- -- Peak</td></tr><tr><td>2</td><td>204.60</td><td>32.17</td><td>43.50</td><td>-11.33</td><td>49.73</td><td>15.19</td><td>2.55</td><td>35.50</td><td>0.20 -- -- Peak</td></tr><tr><td>3</td><td>271.53</td><td>34.22</td><td>46.00</td><td>-11.78</td><td>47.46</td><td>19.00</td><td>2.92</td><td>35.35</td><td>0.19 -- -- Peak</td></tr><tr><td>4</td><td>274.44</td><td>34.31</td><td>46.00</td><td>-11.69</td><td>47.66</td><td>18.86</td><td>2.94</td><td>35.34</td><td>0.19 -- -- Peak</td></tr><tr><td>5</td><td>783.69</td><td>31.76</td><td>46.00</td><td>-14.24</td><td>32.21</td><td>28.22</td><td>4.94</td><td>33.76</td><td>0.15 -- -- Peak</td></tr><tr><td>6</td><td>953.44</td><td>35.33</td><td>46.00</td><td>-10.67</td><td>32.00</td><td>30.94</td><td>5.44</td><td>33.14</td><td>0.09 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	42.61	25.18	40.00	-14.82	41.49	18.05	1.16	35.75	0.23 -- -- Peak	2	204.60	32.17	43.50	-11.33	49.73	15.19	2.55	35.50	0.20 -- -- Peak	3	271.53	34.22	46.00	-11.78	47.46	19.00	2.92	35.35	0.19 -- -- Peak	4	274.44	34.31	46.00	-11.69	47.66	18.86	2.94	35.34	0.19 -- -- Peak	5	783.69	31.76	46.00	-14.24	32.21	28.22	4.94	33.76	0.15 -- -- Peak	6	953.44	35.33	46.00	-10.67	32.00	30.94	5.44	33.14	0.09 -- -- Peak	 Site : 03CH20-HY Condition: QP 3m Bilog_55606 & 08_241127 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>35.82</td><td>30.85</td><td>40.00</td><td>-9.15</td><td>43.61</td><td>21.73</td><td>1.05</td><td>35.75</td><td>0.21 100 332 QP</td></tr><tr><td>2</td><td>42.61</td><td>30.21</td><td>40.00</td><td>-9.79</td><td>46.52</td><td>18.05</td><td>1.16</td><td>35.75</td><td>0.23 100 0 QP</td></tr><tr><td>3</td><td>46.49</td><td>31.73</td><td>40.00</td><td>-8.27</td><td>50.00</td><td>16.05</td><td>1.20</td><td>35.75</td><td>0.23 100 9 QP</td></tr><tr><td>4</td><td>202.66</td><td>28.57</td><td>43.50</td><td>-14.93</td><td>46.21</td><td>15.12</td><td>2.54</td><td>35.50</td><td>0.20 -- -- Peak</td></tr><tr><td>5</td><td>271.53</td><td>28.36</td><td>46.00</td><td>-17.64</td><td>41.60</td><td>19.00</td><td>2.92</td><td>35.35</td><td>0.19 -- -- Peak</td></tr><tr><td>6</td><td>423.82</td><td>31.66</td><td>46.00</td><td>-14.34</td><td>40.13</td><td>22.69</td><td>3.64</td><td>34.95</td><td>0.15 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	35.82	30.85	40.00	-9.15	43.61	21.73	1.05	35.75	0.21 100 332 QP	2	42.61	30.21	40.00	-9.79	46.52	18.05	1.16	35.75	0.23 100 0 QP	3	46.49	31.73	40.00	-8.27	50.00	16.05	1.20	35.75	0.23 100 9 QP	4	202.66	28.57	43.50	-14.93	46.21	15.12	2.54	35.50	0.20 -- -- Peak	5	271.53	28.36	46.00	-17.64	41.60	19.00	2.92	35.35	0.19 -- -- Peak	6	423.82	31.66	46.00	-14.34	40.13	22.69	3.64	34.95	0.15 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	42.61	25.18	40.00	-14.82	41.49	18.05	1.16	35.75	0.23 -- -- Peak																																																																																																																																																																													
2	204.60	32.17	43.50	-11.33	49.73	15.19	2.55	35.50	0.20 -- -- Peak																																																																																																																																																																													
3	271.53	34.22	46.00	-11.78	47.46	19.00	2.92	35.35	0.19 -- -- Peak																																																																																																																																																																													
4	274.44	34.31	46.00	-11.69	47.66	18.86	2.94	35.34	0.19 -- -- Peak																																																																																																																																																																													
5	783.69	31.76	46.00	-14.24	32.21	28.22	4.94	33.76	0.15 -- -- Peak																																																																																																																																																																													
6	953.44	35.33	46.00	-10.67	32.00	30.94	5.44	33.14	0.09 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	35.82	30.85	40.00	-9.15	43.61	21.73	1.05	35.75	0.21 100 332 QP																																																																																																																																																																													
2	42.61	30.21	40.00	-9.79	46.52	18.05	1.16	35.75	0.23 100 0 QP																																																																																																																																																																													
3	46.49	31.73	40.00	-8.27	50.00	16.05	1.20	35.75	0.23 100 9 QP																																																																																																																																																																													
4	202.66	28.57	43.50	-14.93	46.21	15.12	2.54	35.50	0.20 -- -- Peak																																																																																																																																																																													
5	271.53	28.36	46.00	-17.64	41.60	19.00	2.92	35.35	0.19 -- -- Peak																																																																																																																																																																													
6	423.82	31.66	46.00	-14.34	40.13	22.69	3.64	34.95	0.15 -- -- Peak																																																																																																																																																																													



Mode	108																																																																																														
	SHF																																																																																														
	2400-2483.5_802.11g_CH11_2462MHz																																																																																														
ANT	4+3																																																																																														
Pol.	Horizontal						Vertical																																																																																								
Peak																																																																																															
	Site : 03CH22-HY Condition: PEAK_74 1m SHF_1225_240624 HORIZONTAL						Site : 03CH22-HY Condition: PEAK_74 1m SHF_1225_240624 VERTICAL																																																																																								
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>23770.38</td><td>40.17</td><td>74.00</td><td>-33.83</td><td>42.42</td><td>38.70</td><td>28.79</td><td>60.20</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	23770.38	40.17	74.00	-33.83	42.42	38.70	28.79	60.20	-9.54	--	--	--	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>23819.72</td><td>40.81</td><td>74.00</td><td>-33.19</td><td>43.02</td><td>38.70</td><td>28.83</td><td>60.20</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	23819.72	40.81	74.00	-33.19	43.02	38.70	28.83	60.20	-9.54	--	--	--
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	23770.38	40.17	74.00	-33.83	42.42	38.70	28.79	60.20	-9.54	--	--	--	PEAK																																																																																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	23819.72	40.81	74.00	-33.19	43.02	38.70	28.83	60.20	-9.54	--	--	--	PEAK																																																																																		




Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
3	802.11b	100.00	-	-	10Hz
4	802.11b	100.00	-	-	10Hz
4+3	802.11g	100.00	-	-	10Hz
4+3	2.4GHz 802.11ax HE20 Full RU	99.45	-	-	10Hz
4+3	2.4GHz 802.11ax HE20 26 RU	97.89	1620	0.62	680Hz
4+3	2.4GHz 802.11ax HE20 52 RU	97.01	1460	0.68	750Hz
4+3	2.4GHz 802.11ax HE20 106 RU	97.40	1310	0.76	820Hz



<Ant.3>

<Ant.4>

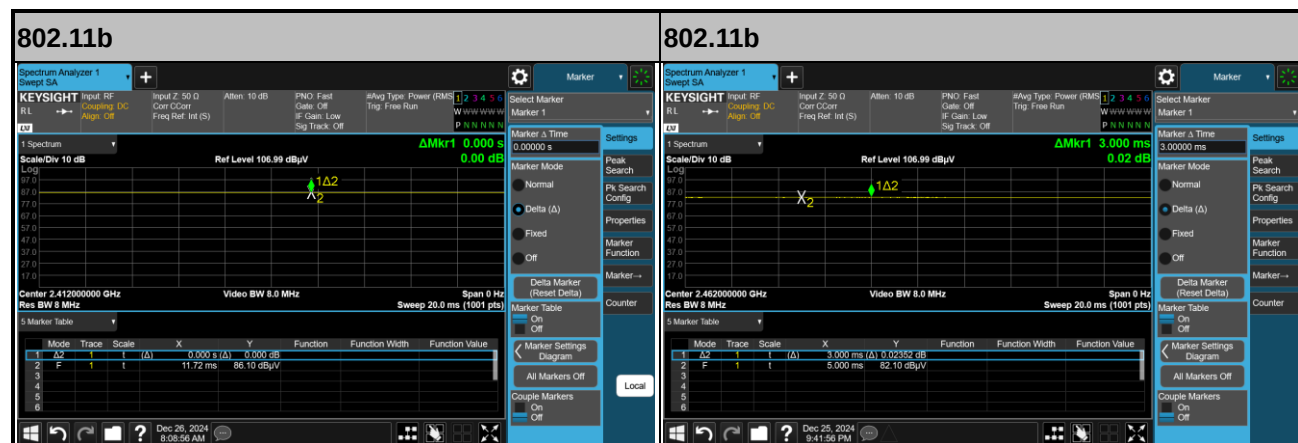



MIMO <Ant.4+3>

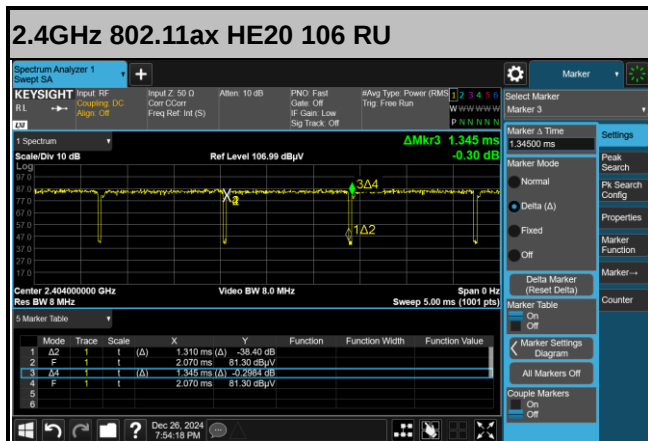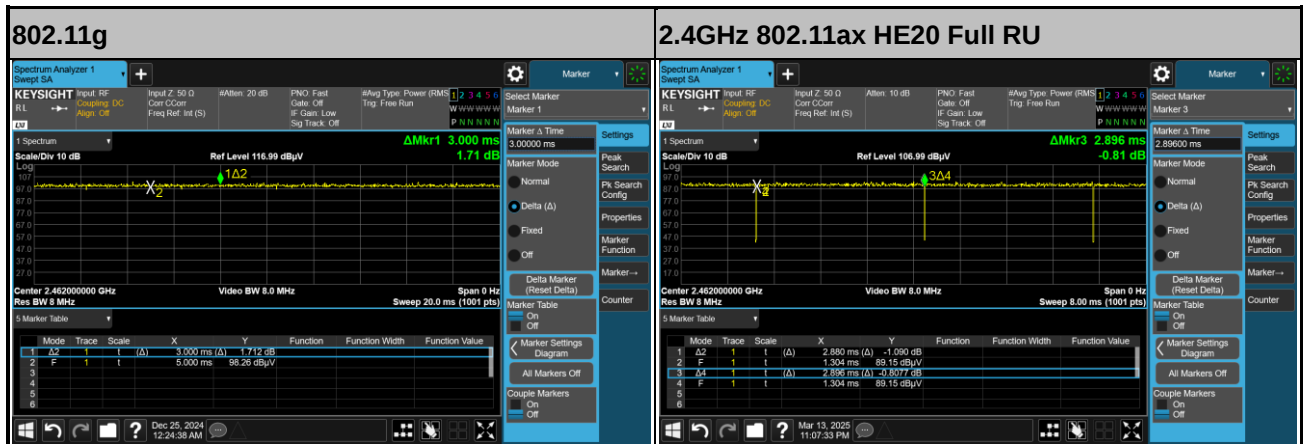

—THE END—