



Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

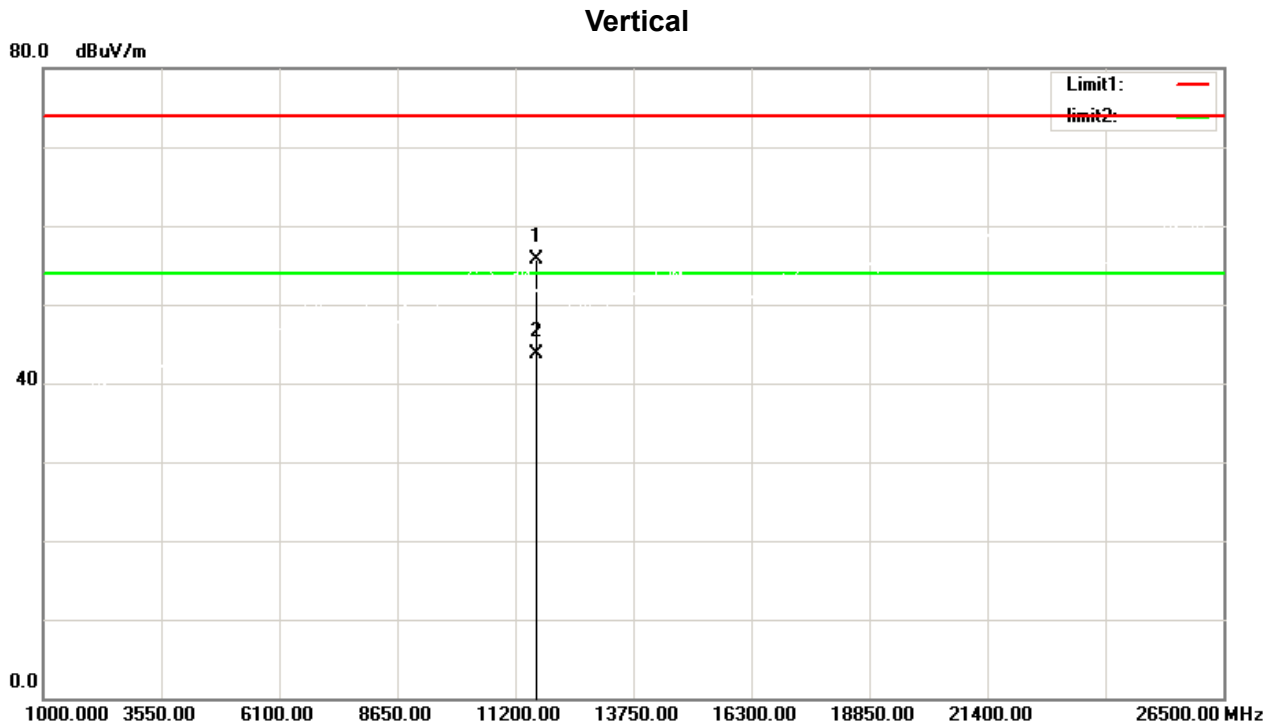

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11650.00	47.25	8.45	55.70	74.00	-18.30	peak	150	91
2	*	11650.00	35.18	8.45	43.63	54.00	-10.37	AVG	150	91


Report No.: 24EFSS04089 03661

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

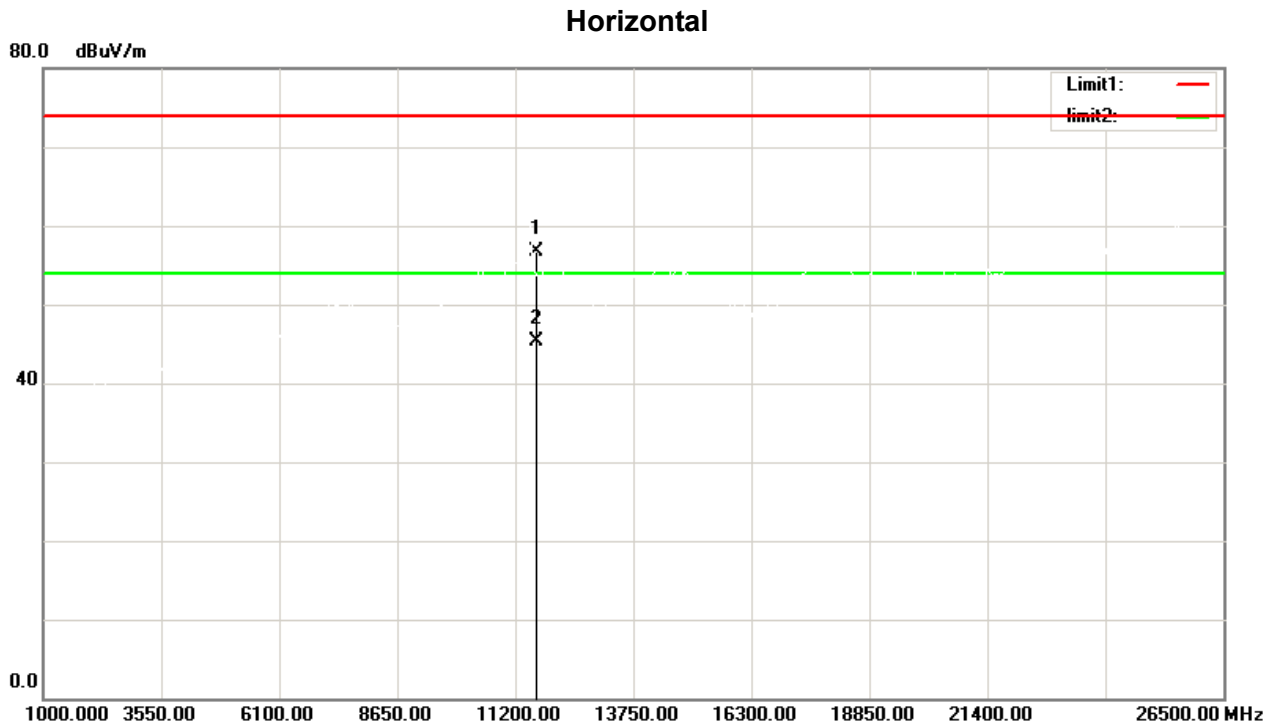


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11650.00	48.29	8.45	56.74	74.00	-17.26	peak	150	52
2	*	11650.00	36.86	8.45	45.31	54.00	-8.69	AVG	150	52

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

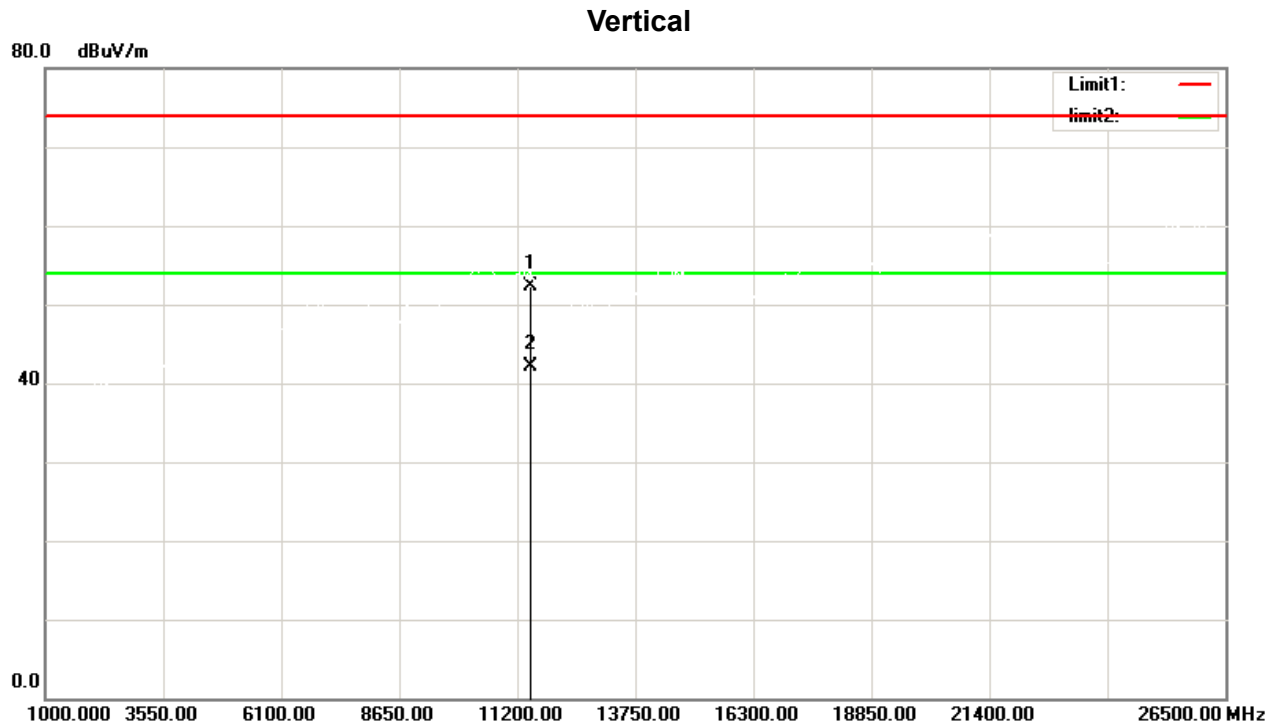


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11490.00	44.01	8.36	52.37	74.00	-21.63	peak	150	87	
2	*	11490.00	33.80	8.36	42.16	54.00	-11.84	AVG	150	87	

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5745 MHz

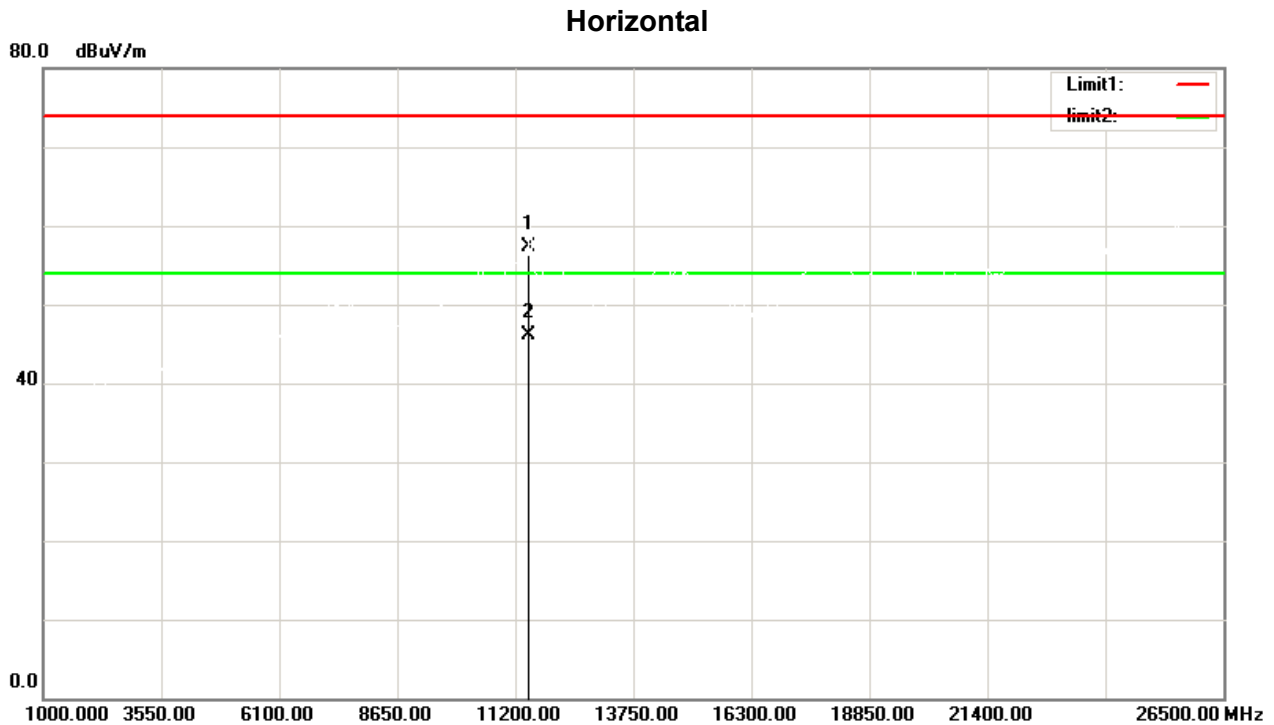


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11490.00	48.98	8.36	57.34	74.00	-16.66	peak	150	49	
2	*	11490.00	37.77	8.36	46.13	54.00	-7.87	AVG	150	49	

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

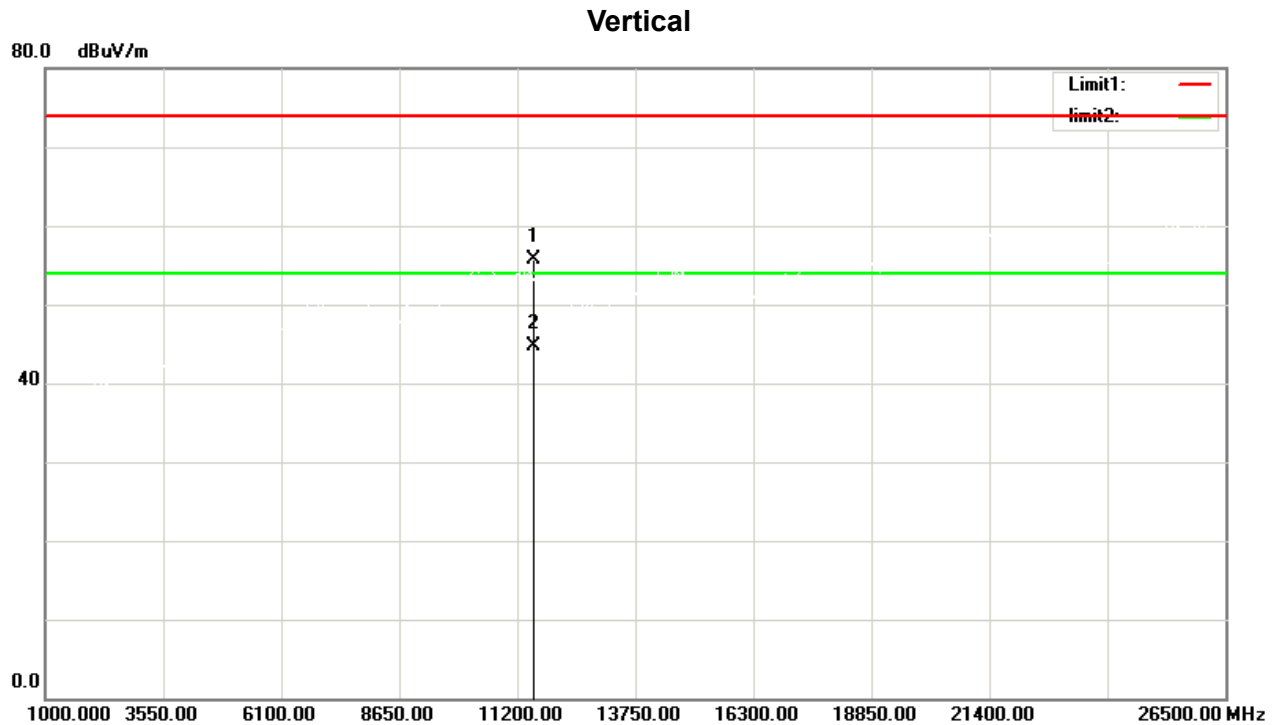

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11570.00	47.21	8.40	55.61	74.00	-18.39	peak	150	88
2	*	11570.00	36.40	8.40	44.80	54.00	-9.20	AVG	150	88


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5785 MHz

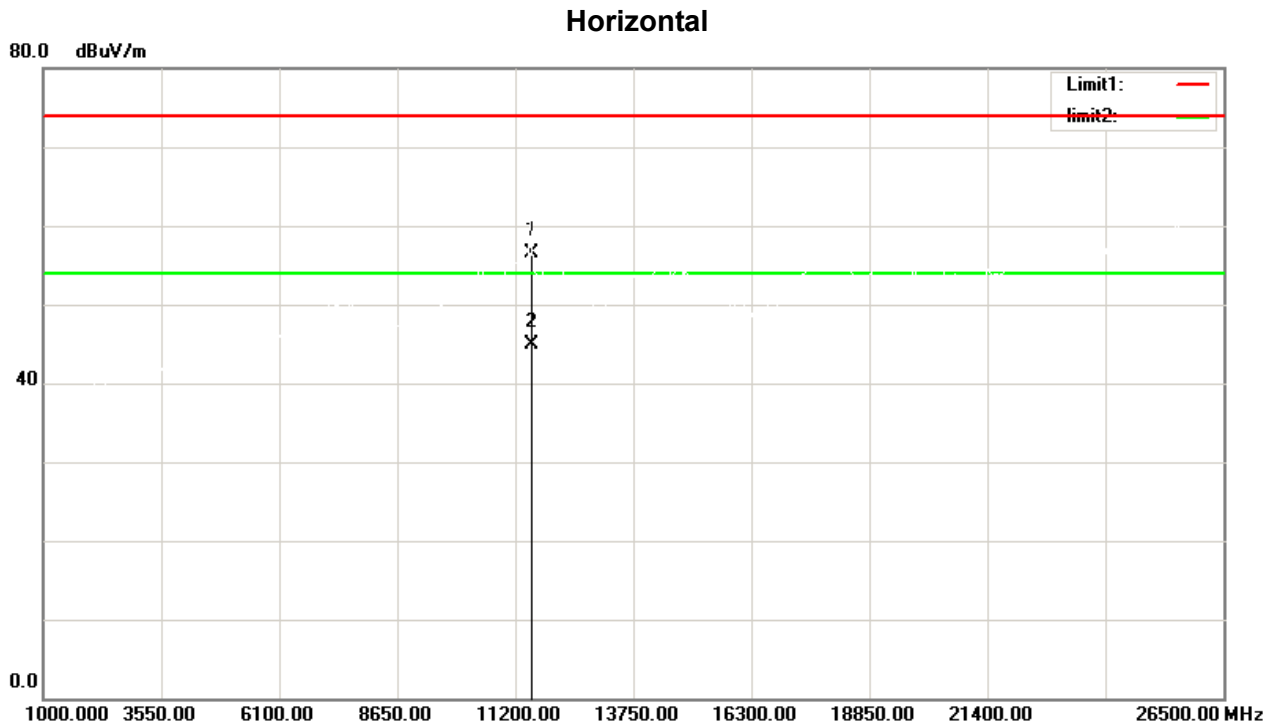

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11570.00	48.01	8.40	56.41	74.00	-17.59	peak	150	53	
2	*	11570.00	36.60	8.40	45.00	54.00	-9.00	AVG	150	53	

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz


Vertical

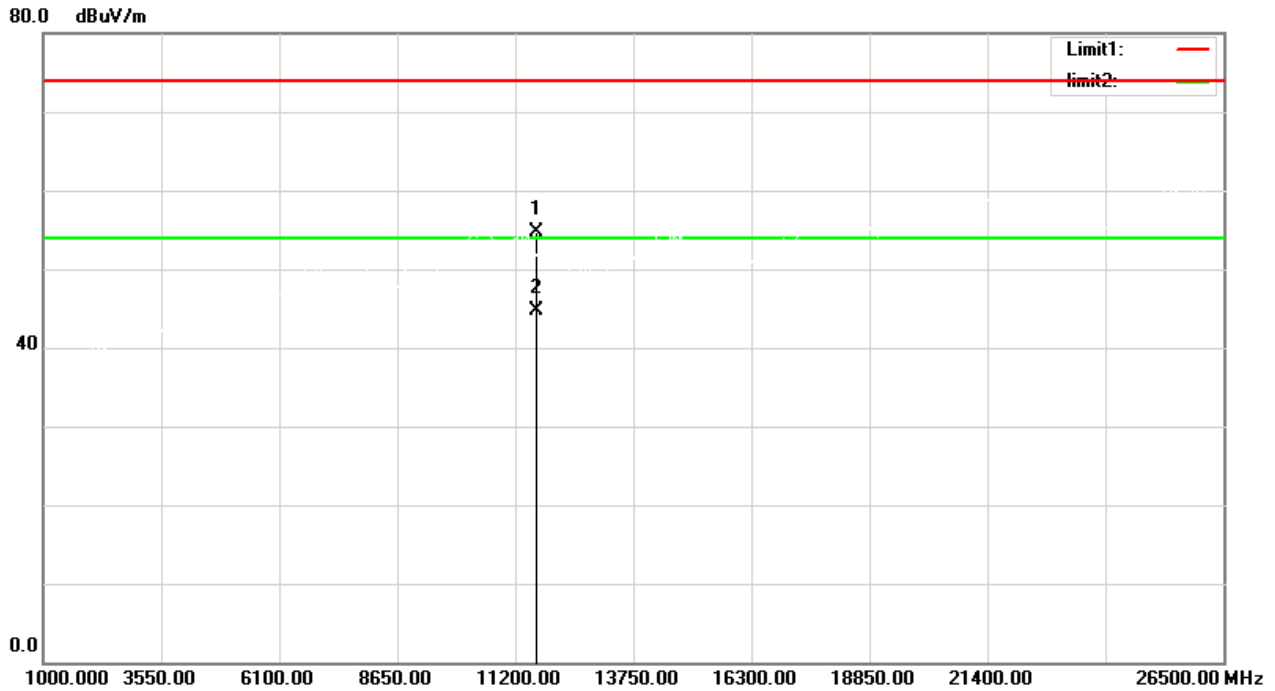

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11650.00	46.32	8.45	54.77	74.00	-19.23	peak	150	86
2	*	11650.00	36.22	8.45	44.67	54.00	-9.33	AVG	150	86


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT20) Mode 5825 MHz

Horizontal

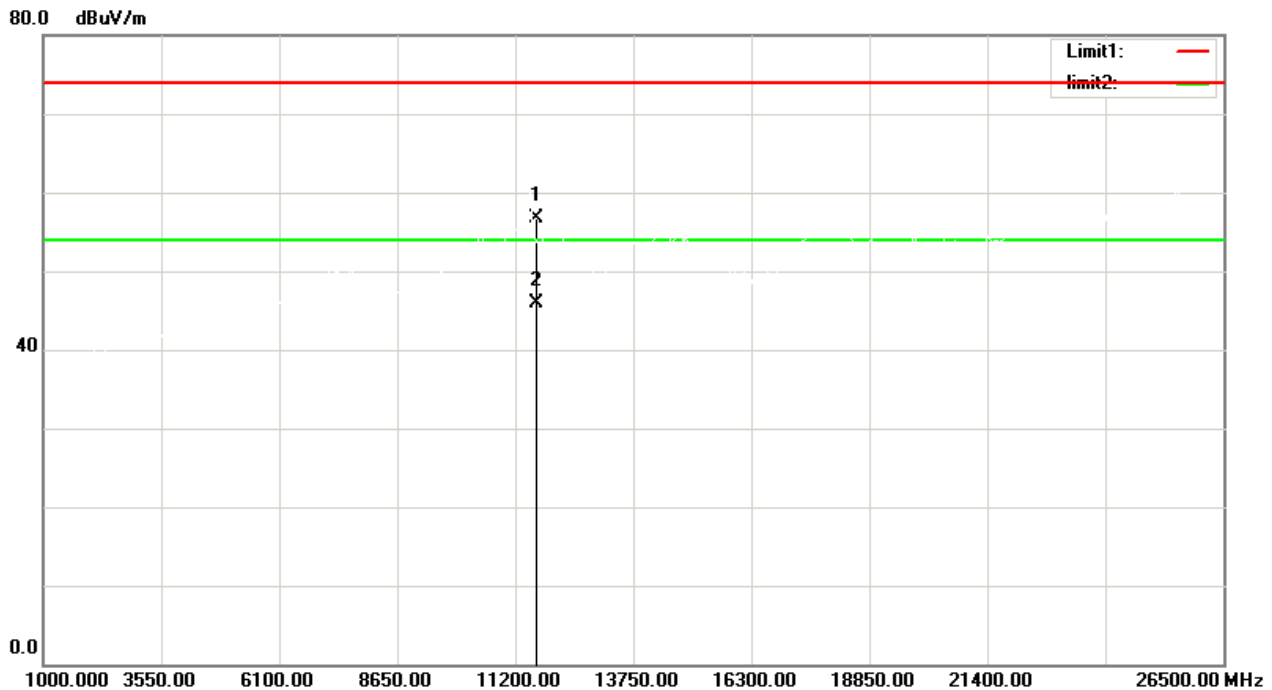

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11650.00	48.25	8.45	56.70	74.00	-17.30	peak	150	43
2	*	11650.00	37.42	8.45	45.87	54.00	-8.13	AVG	150	43


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

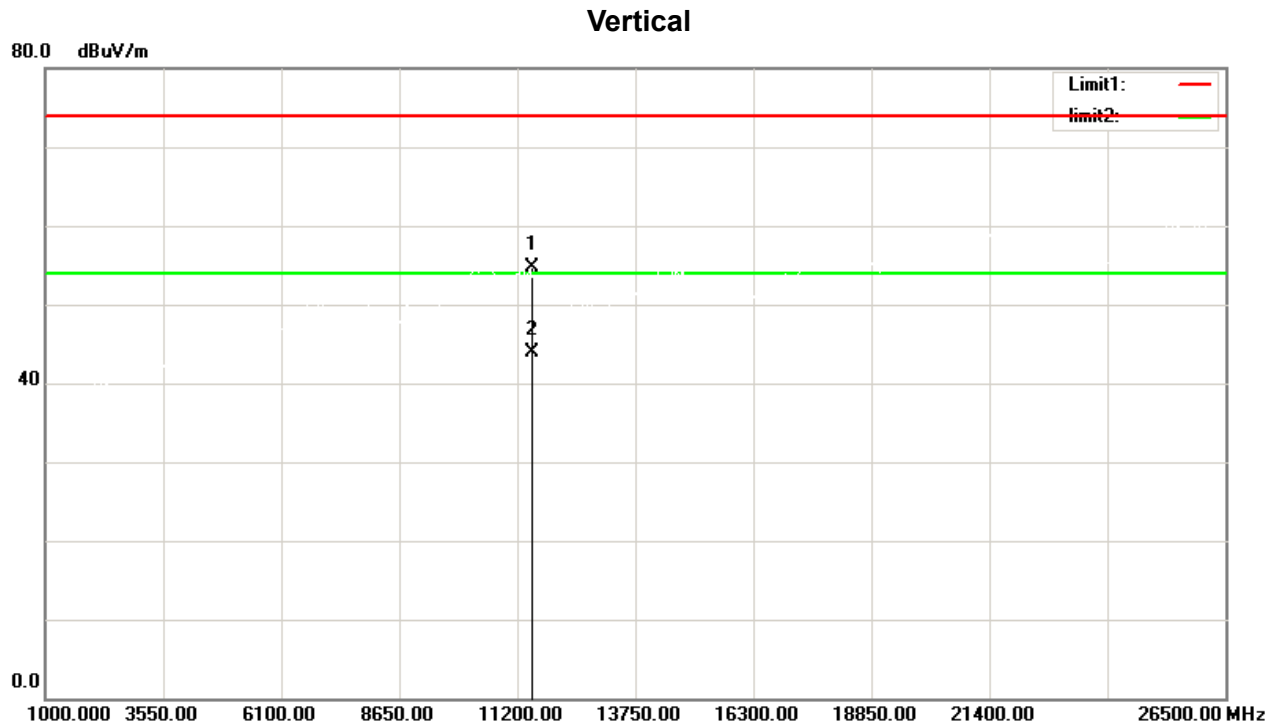

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11510.00	46.33	8.35	54.68	74.00	-19.32	peak	150	102
2	*	11510.00	35.59	8.35	43.94	54.00	-10.06	AVG	150	102


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5755 MHz

Horizontal

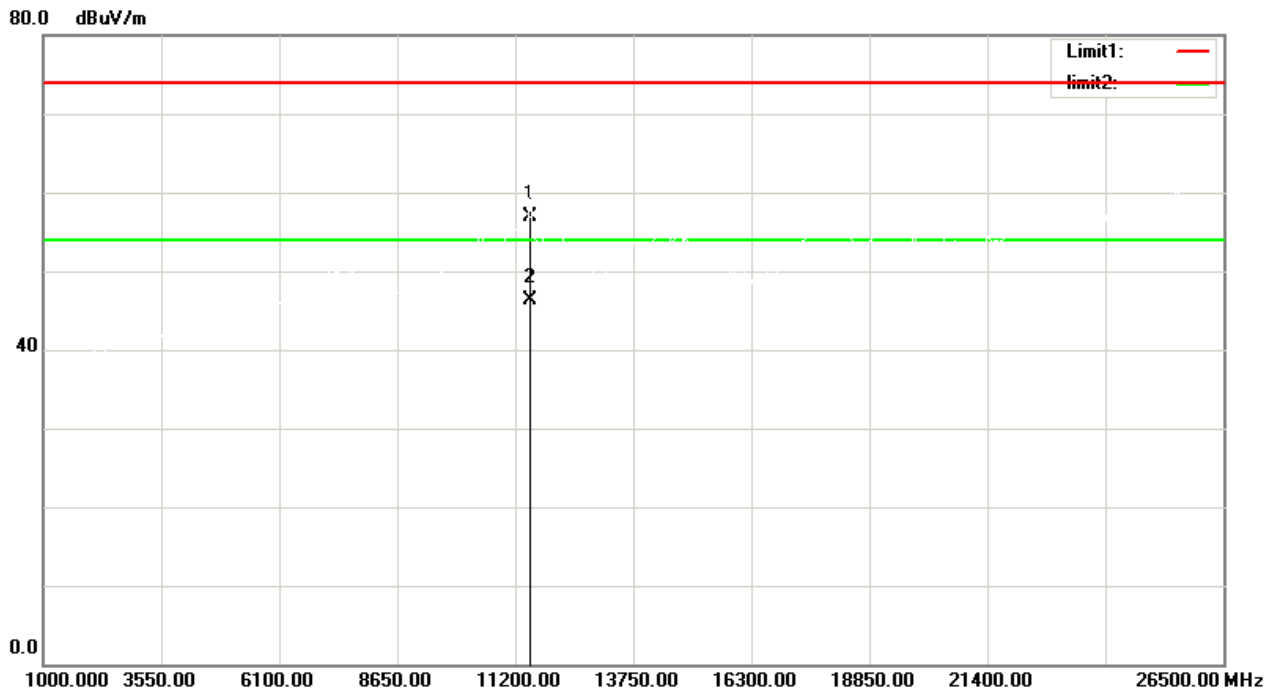


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11510.00	48.53	8.35	56.88	74.00	-17.12	peak	150	41
2	*	11510.00	37.95	8.35	46.30	54.00	-7.70	AVG	150	41

Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

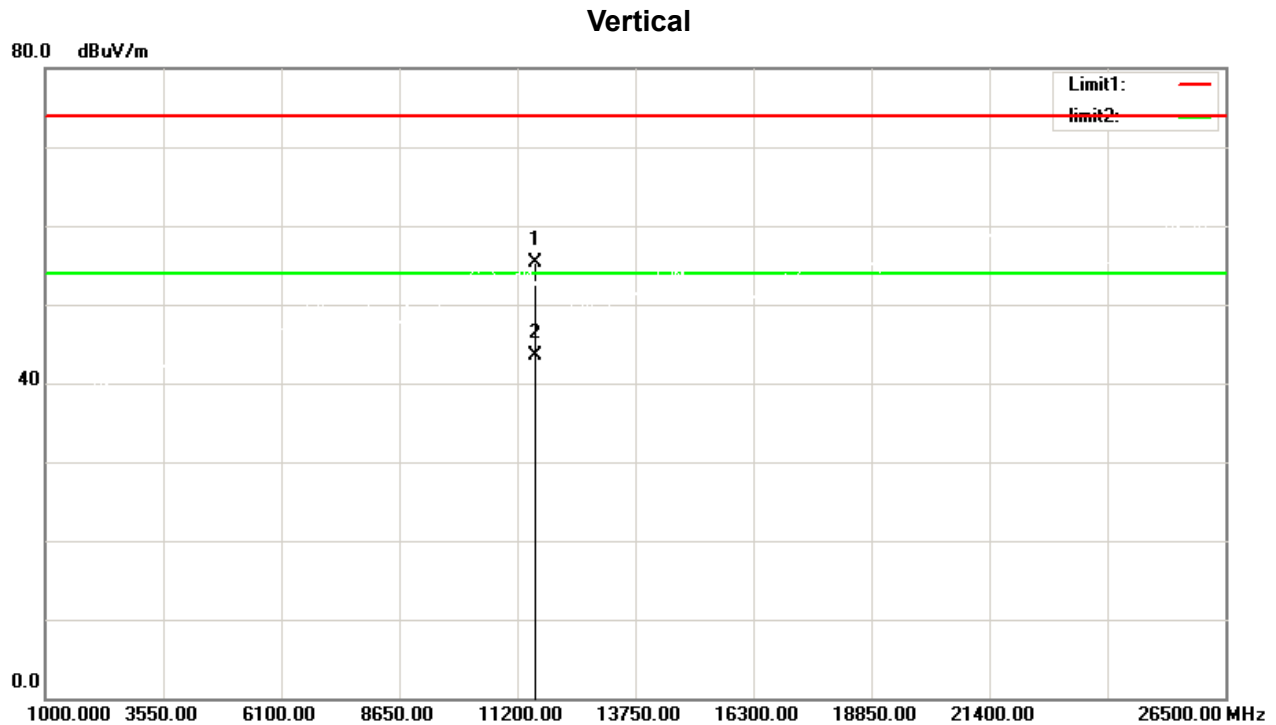

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11590.00	46.92	8.41	55.33	74.00	-18.67	peak	150	95	
2	*	11590.00	35.00	8.41	43.41	54.00	-10.59	AVG	150	95	


Orthogonal Axis	X
Test Mode	UNII-3_TX N (HT40) Mode 5795 MHz

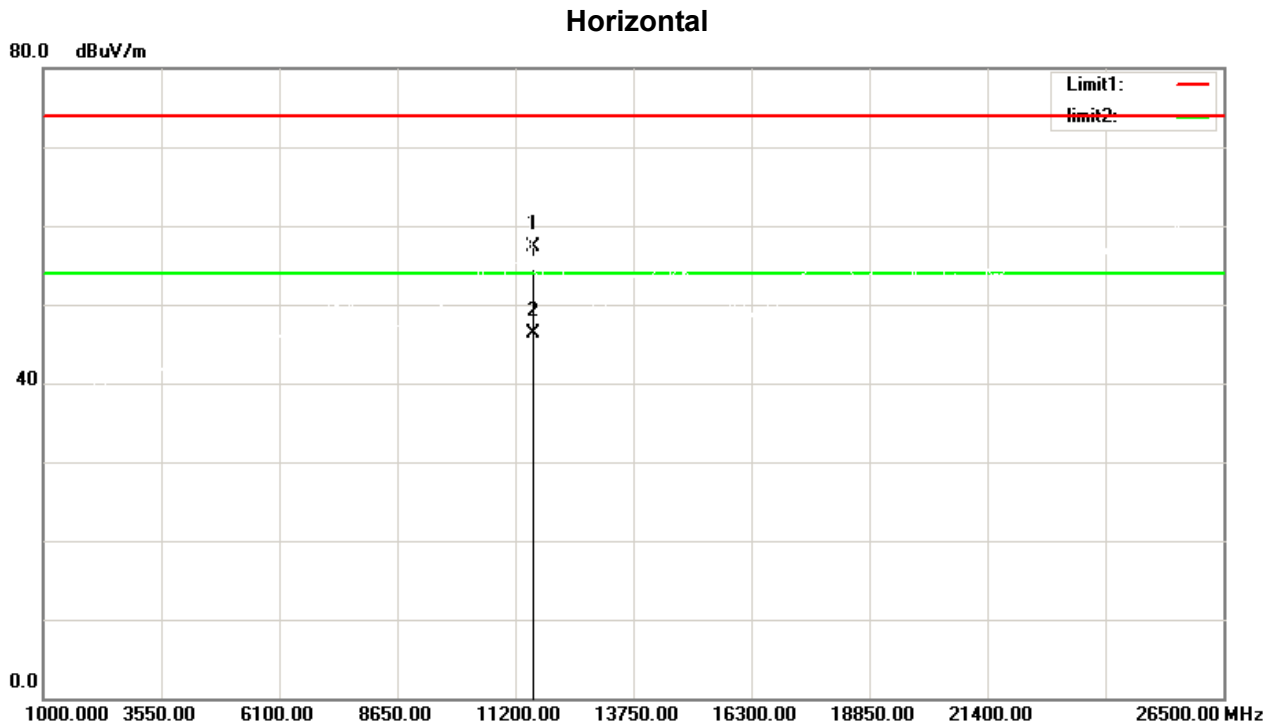

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11590.00	48.97	8.41	57.38	74.00	-16.62	peak	150	40	
2	*	11590.00	37.81	8.41	46.22	54.00	-7.78	AVG	150	40	


Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

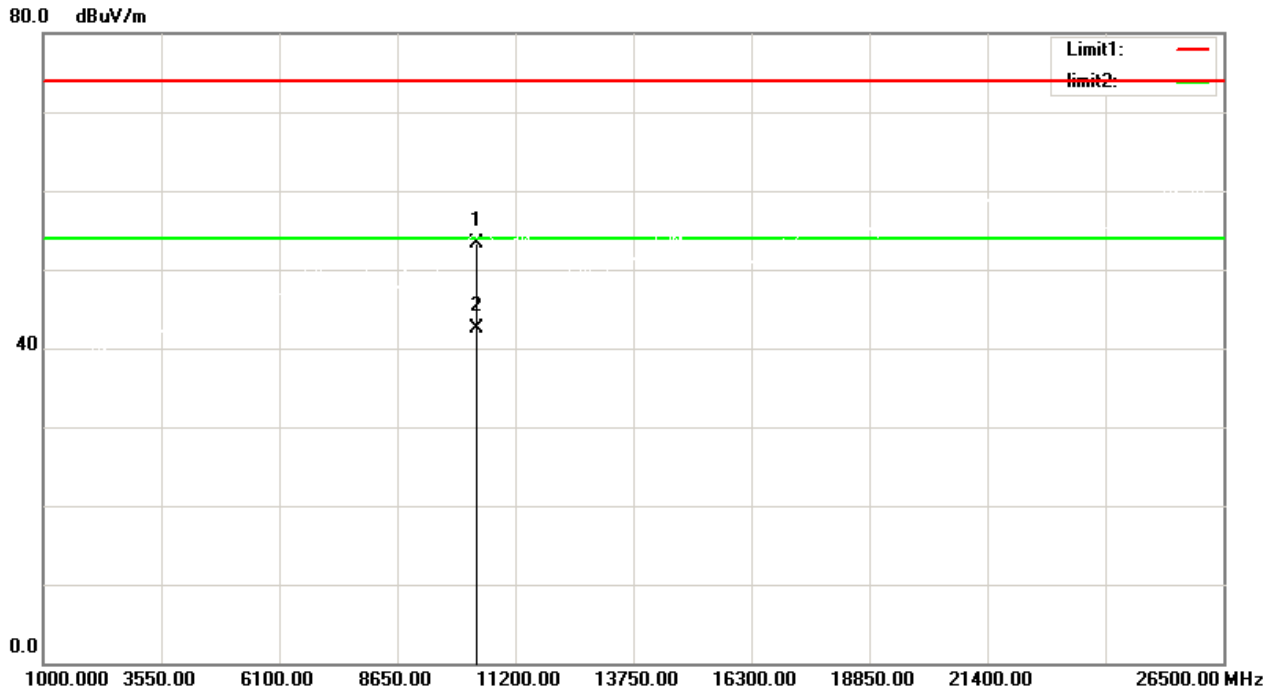

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10360.00	45.38	7.86	53.24	74.00	-20.76	peak	150	76
2	*	10360.00	34.74	7.86	42.60	54.00	-11.40	AVG	150	76


Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

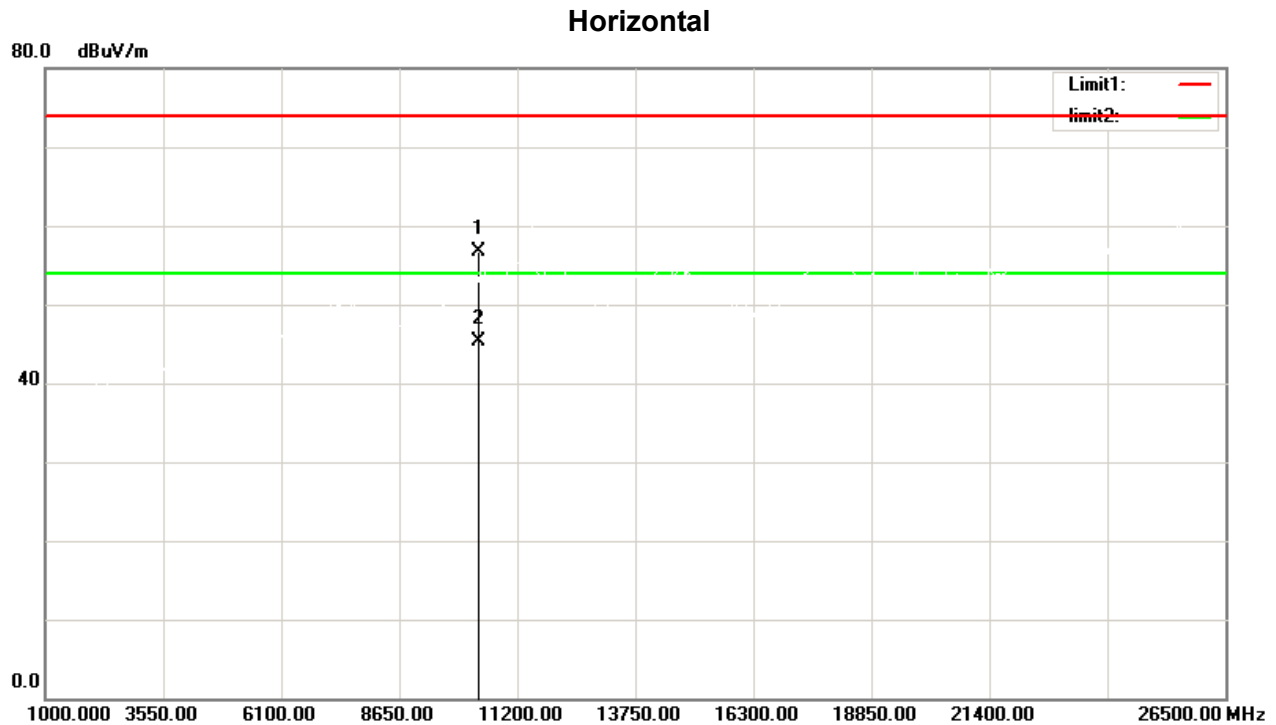

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10360.00	48.84	7.86	56.70	74.00	-17.30	peak	150	40
2	*	10360.00	37.54	7.86	45.40	54.00	-8.60	AVG	150	40


Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

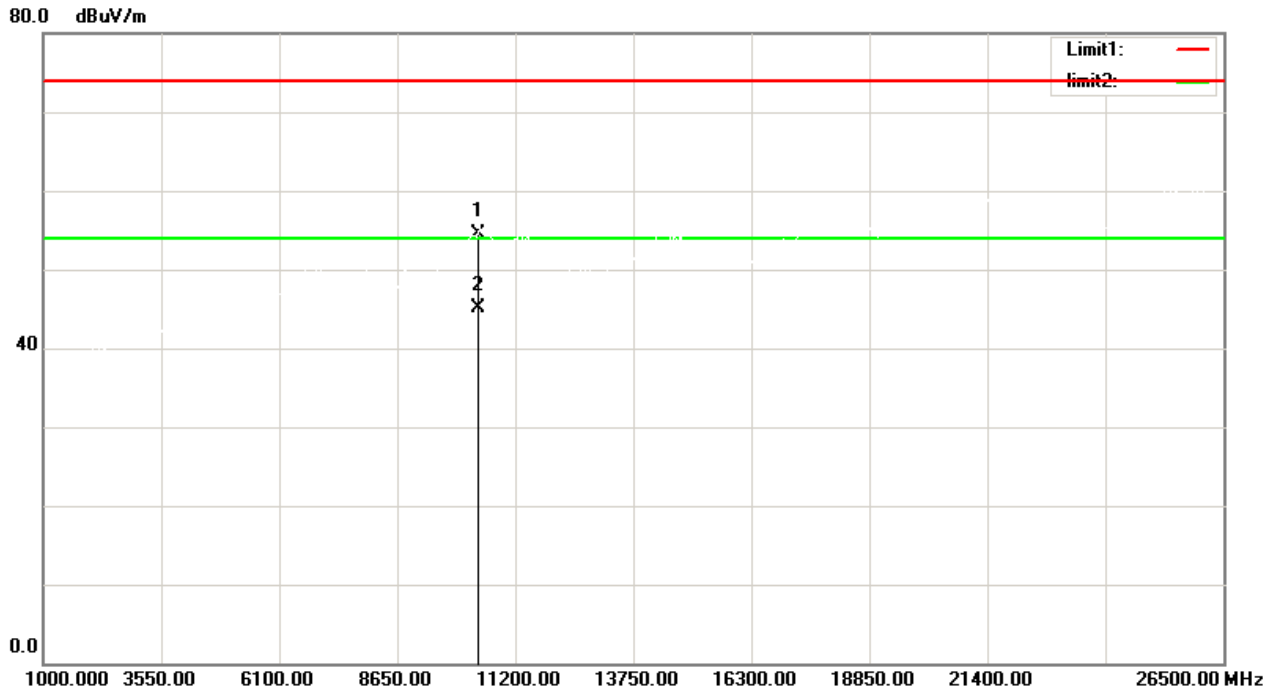

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10400.00	46.56	8.04	54.60	74.00	-19.40	peak	150	91
2	*	10400.00	37.16	8.04	45.20	54.00	-8.80	AVG	150	91


Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

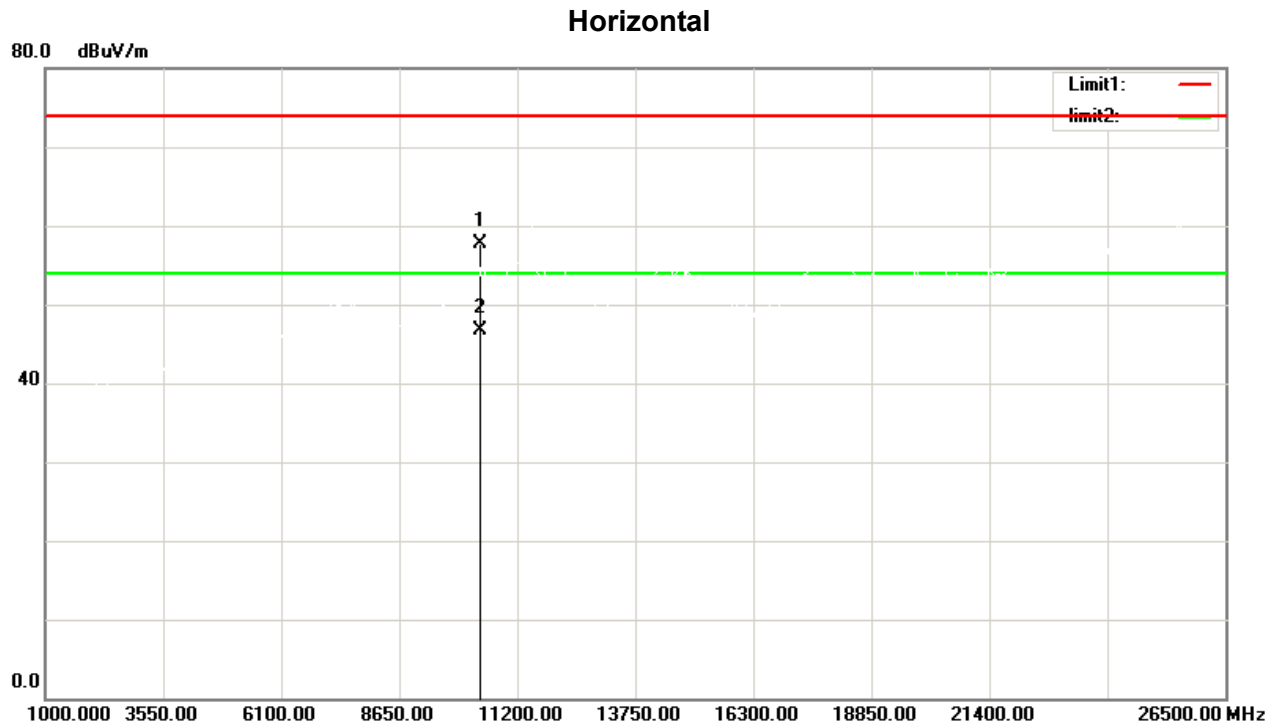

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10400.00	49.66	8.04	57.70	74.00	-16.30	peak	150	36
2	*	10400.00	38.76	8.04	46.80	54.00	-7.20	AVG	150	36

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz


Vertical

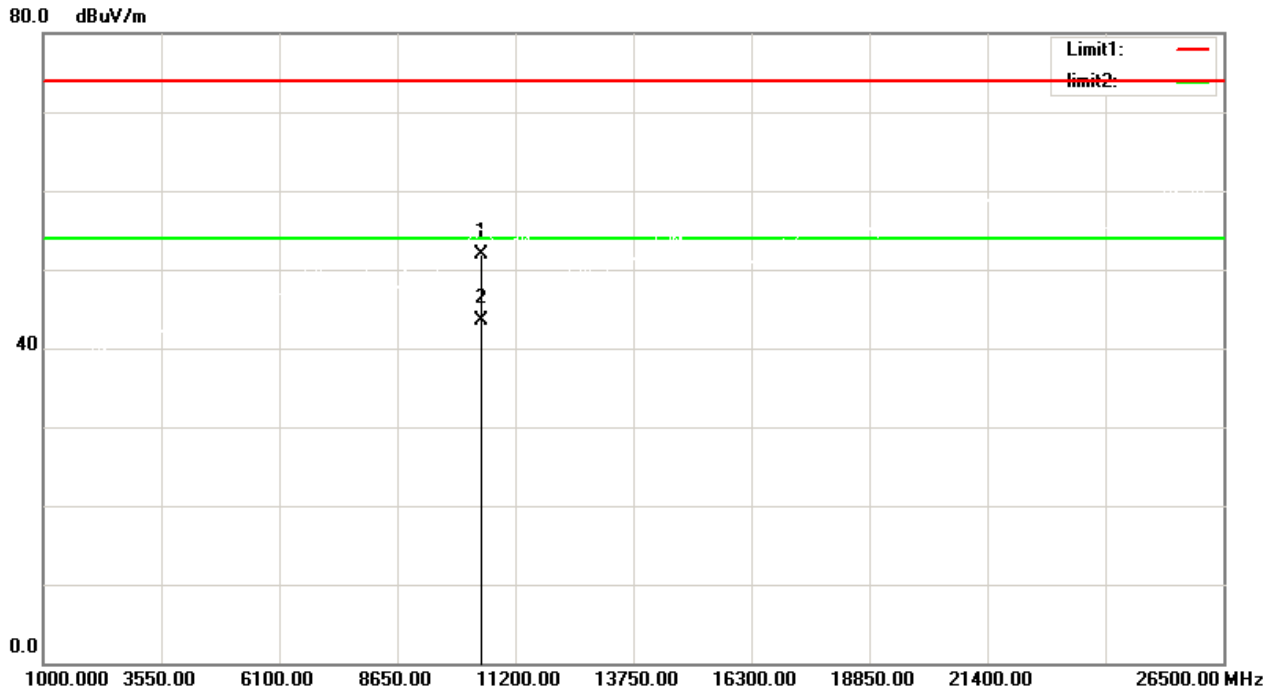

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10480.00	43.63	8.37	52.00	74.00	-22.00	peak	150	86
2	*	10480.00	35.23	8.37	43.60	54.00	-10.40	AVG	150	86

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz


Horizontal

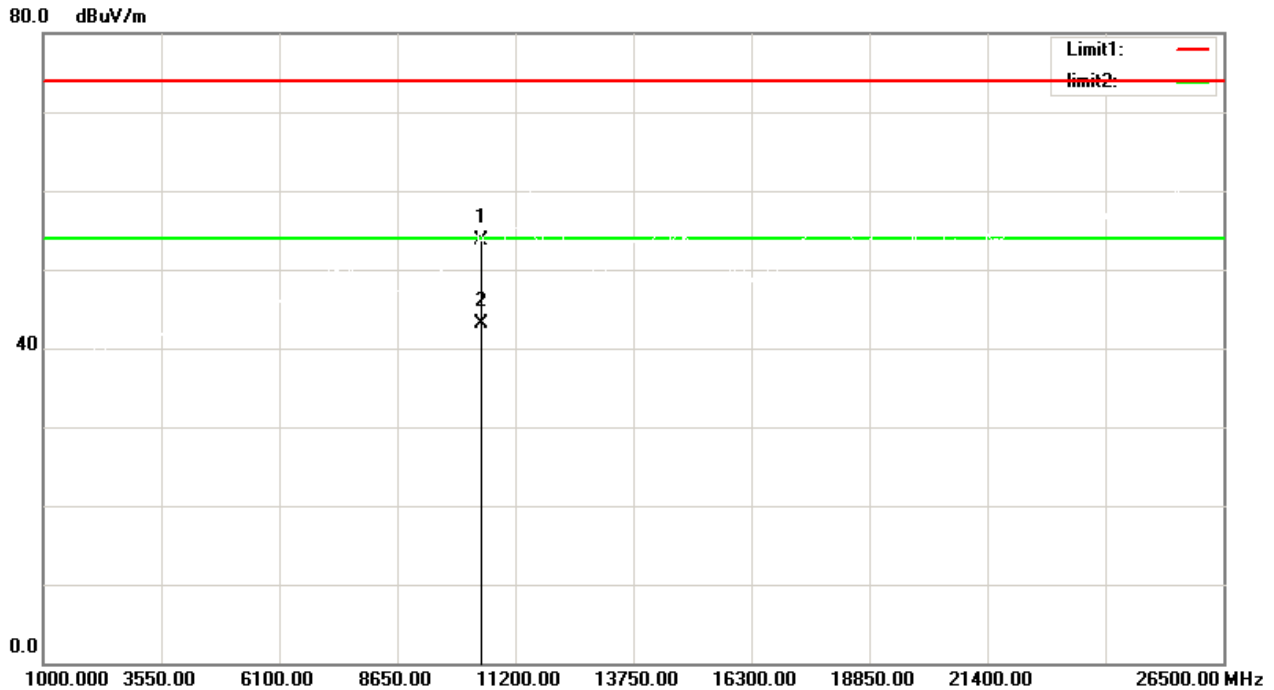

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10480.00	45.39	8.37	53.76	74.00	-20.24	peak	150	36
2	*	10480.00	34.83	8.37	43.20	54.00	-10.80	AVG	150	36


Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

Vertical

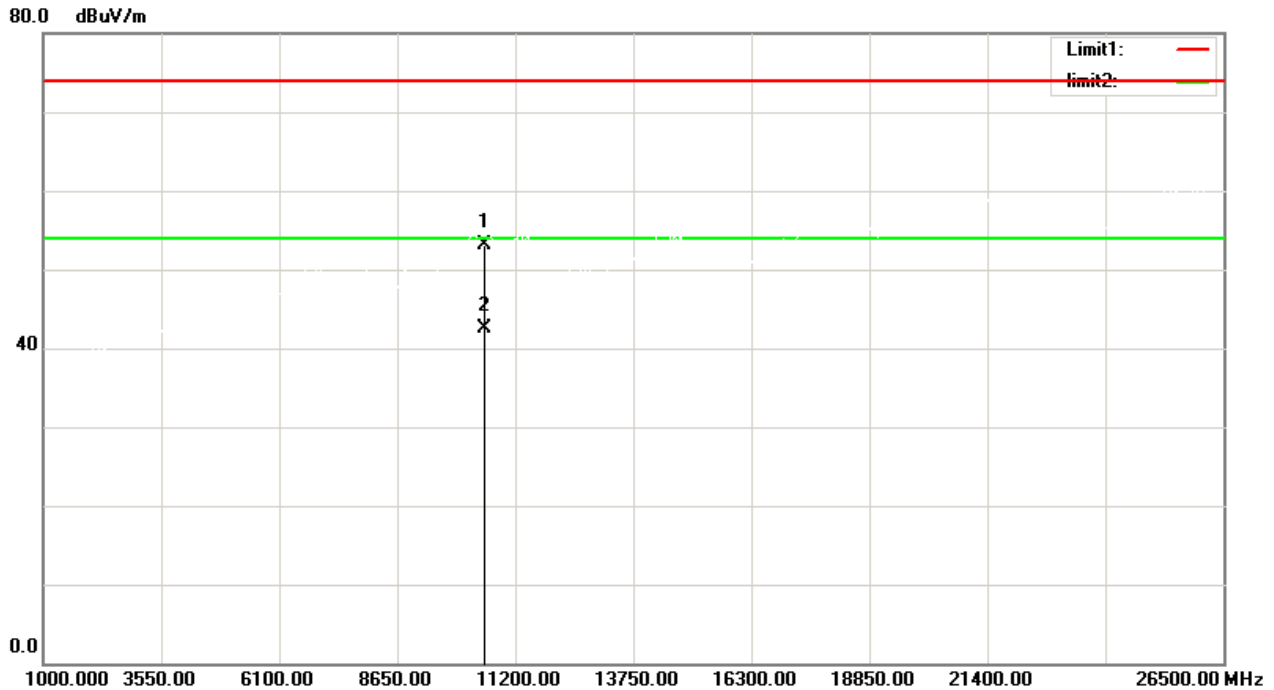

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10520.00	44.58	8.44	53.02	74.00	-20.98	peak	150	87	
2	*	10520.00	34.16	8.44	42.60	54.00	-11.40	AVG	150	87	


Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5260 MHz

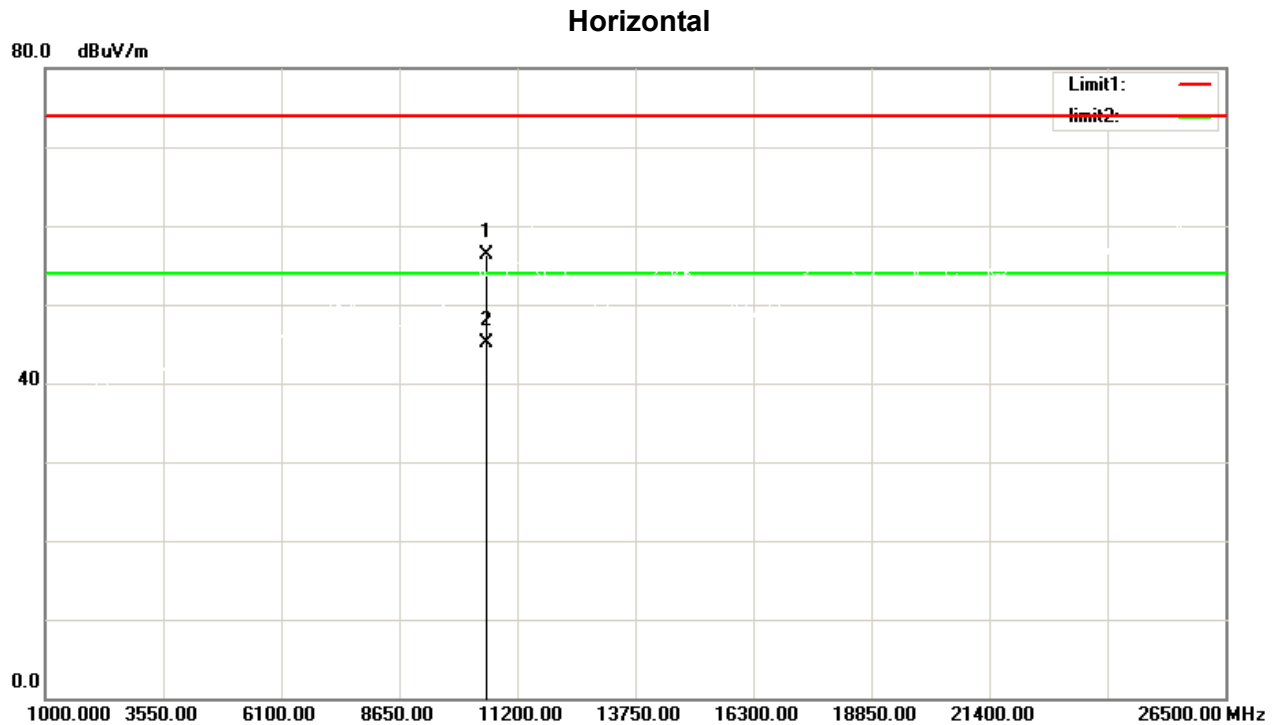

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10520.00	47.92	8.44	56.36	74.00	-17.64	peak	150	39	
2	*	10520.00	36.58	8.44	45.02	54.00	-8.98	AVG	150	39	


Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

Vertical

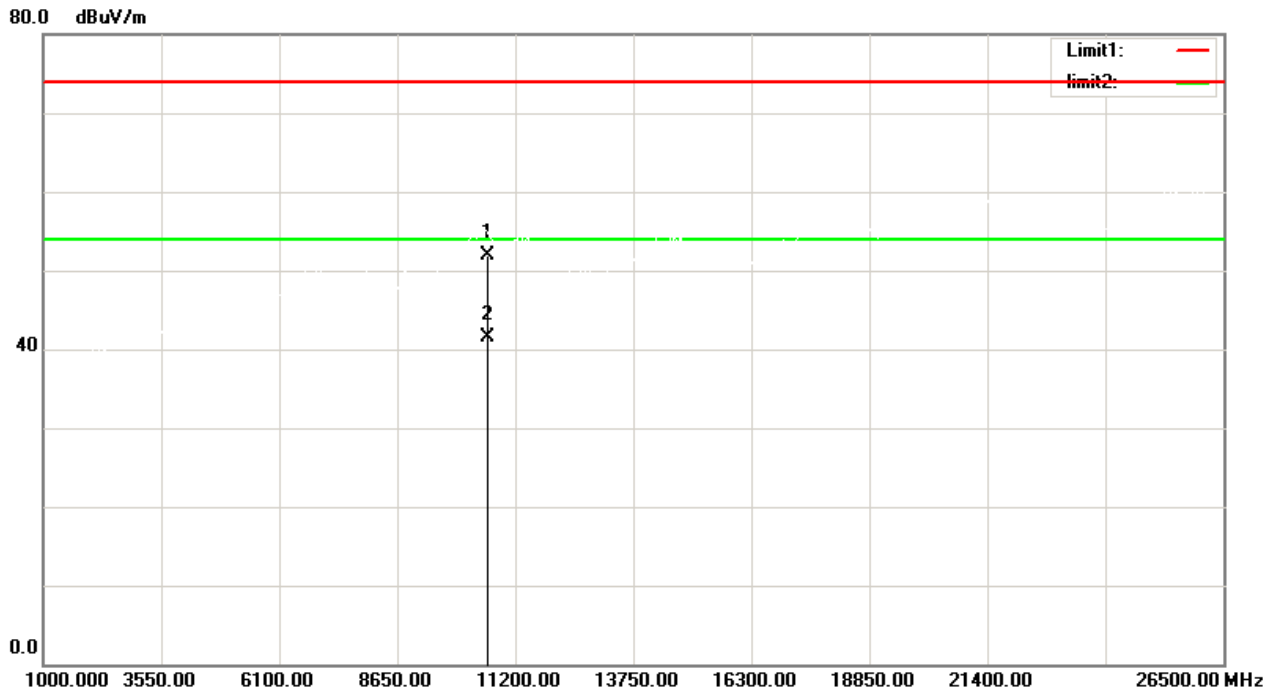

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10600.00	43.54	8.42	51.96	74.00	-22.04	peak	150	89
2	*	10600.00	33.16	8.42	41.58	54.00	-12.42	AVG	150	89


Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5300 MHz

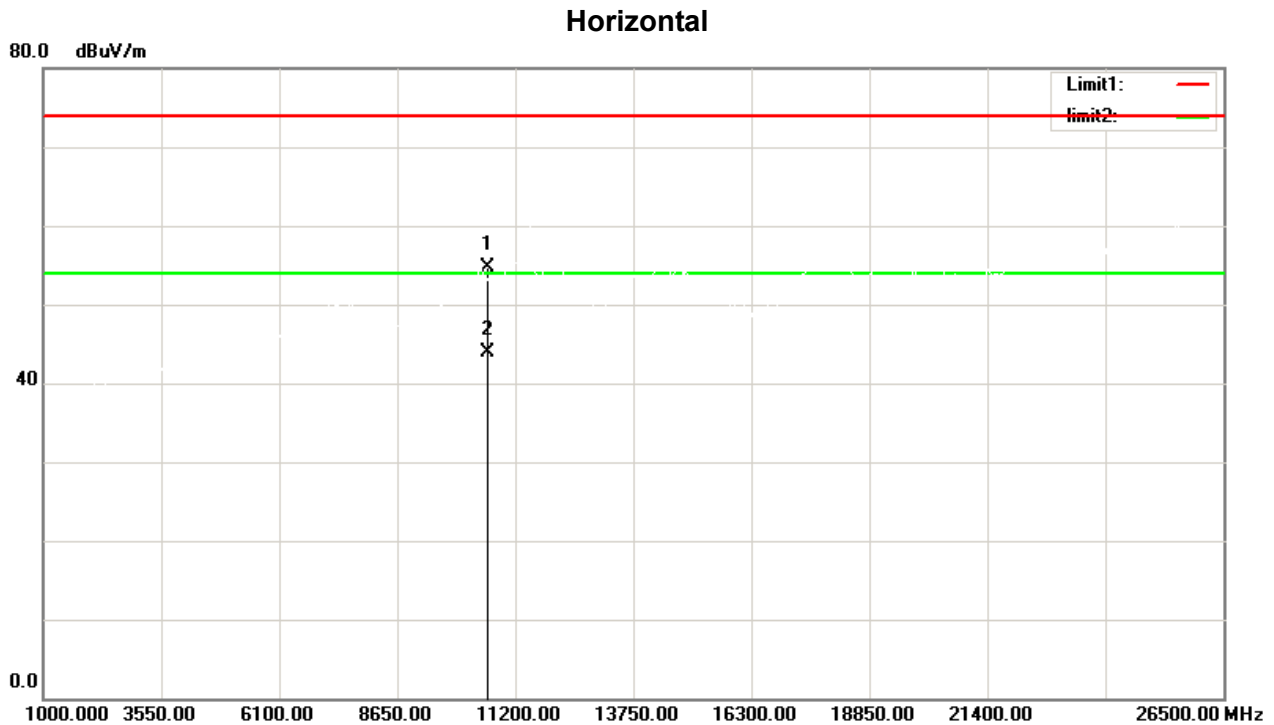

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10600.00	46.27	8.42	54.69	74.00	-19.31	peak	150	46
2	*	10600.00	35.42	8.42	43.84	54.00	-10.16	AVG	150	46


Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

Vertical

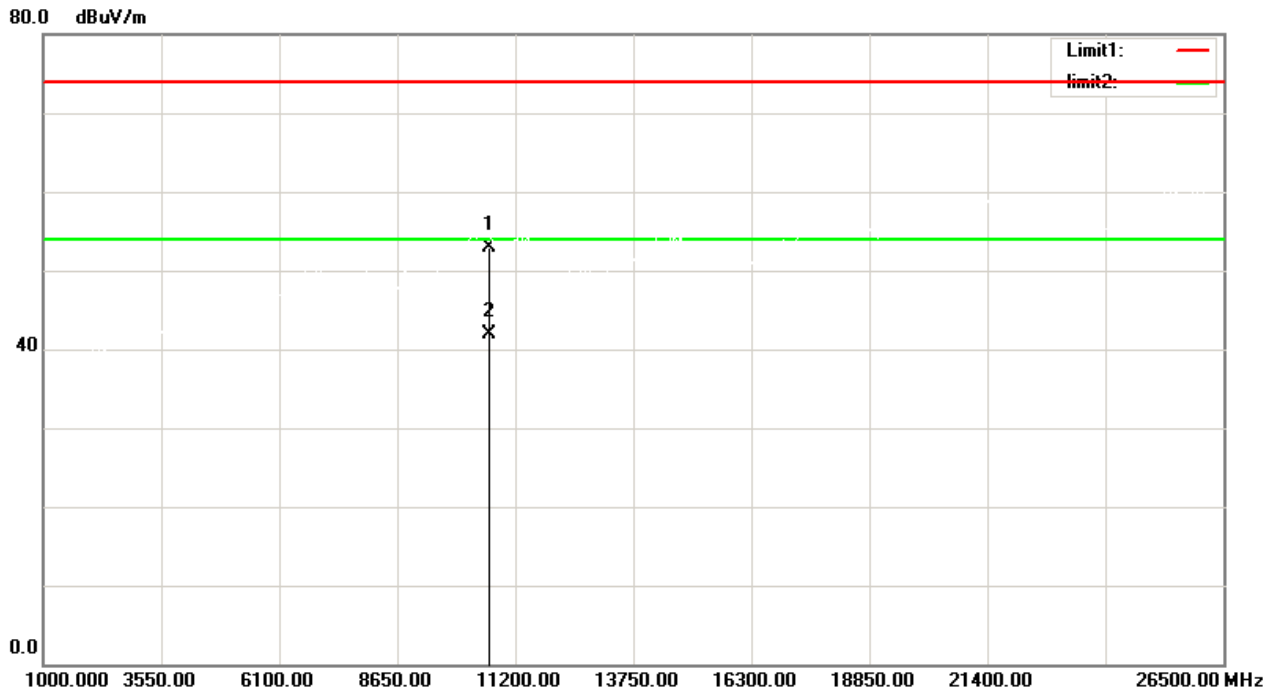

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10640.00	44.43	8.42	52.85	74.00	-21.15	peak	150	86	
2	*	10640.00	33.44	8.42	41.86	54.00	-12.14	AVG	150	86	

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT20) Mode 5320 MHz

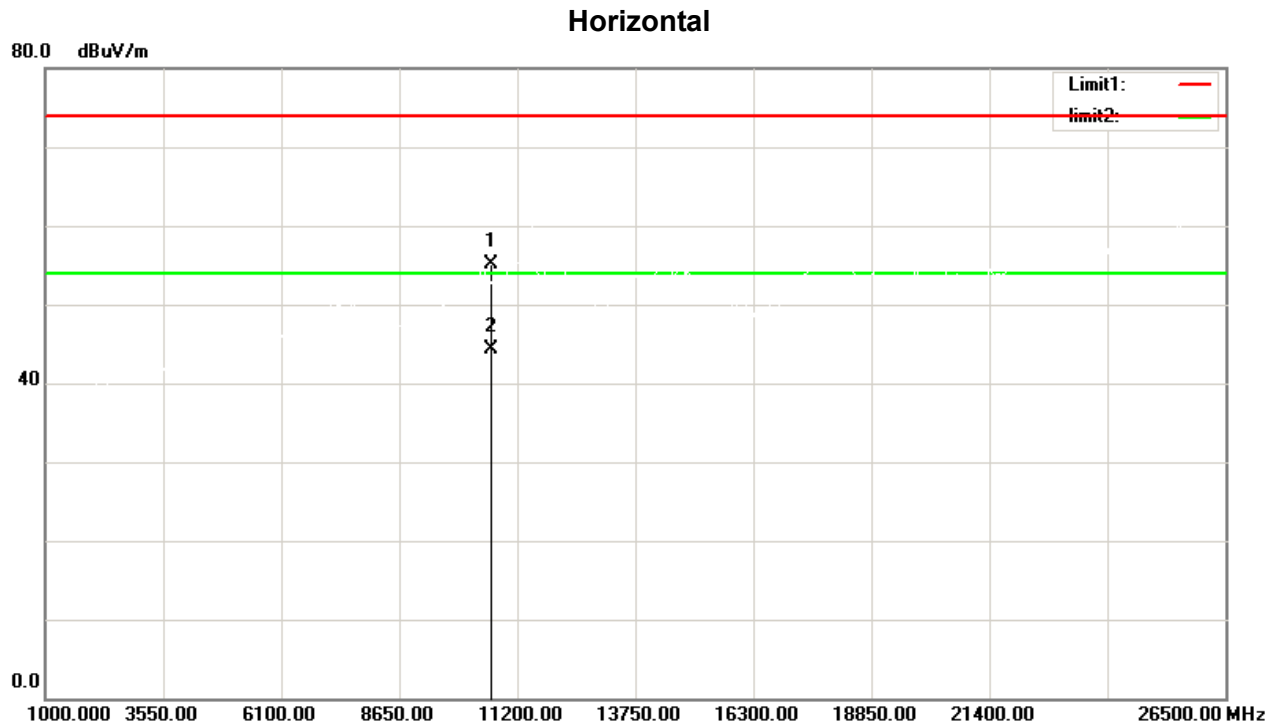


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10640.00	46.74	8.42	55.16	74.00	-18.84	peak	150	46
2	*	10640.00	35.94	8.42	44.36	54.00	-9.64	AVG	150	46

Report No.: 24EFSS04089 03661


Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

Vertical

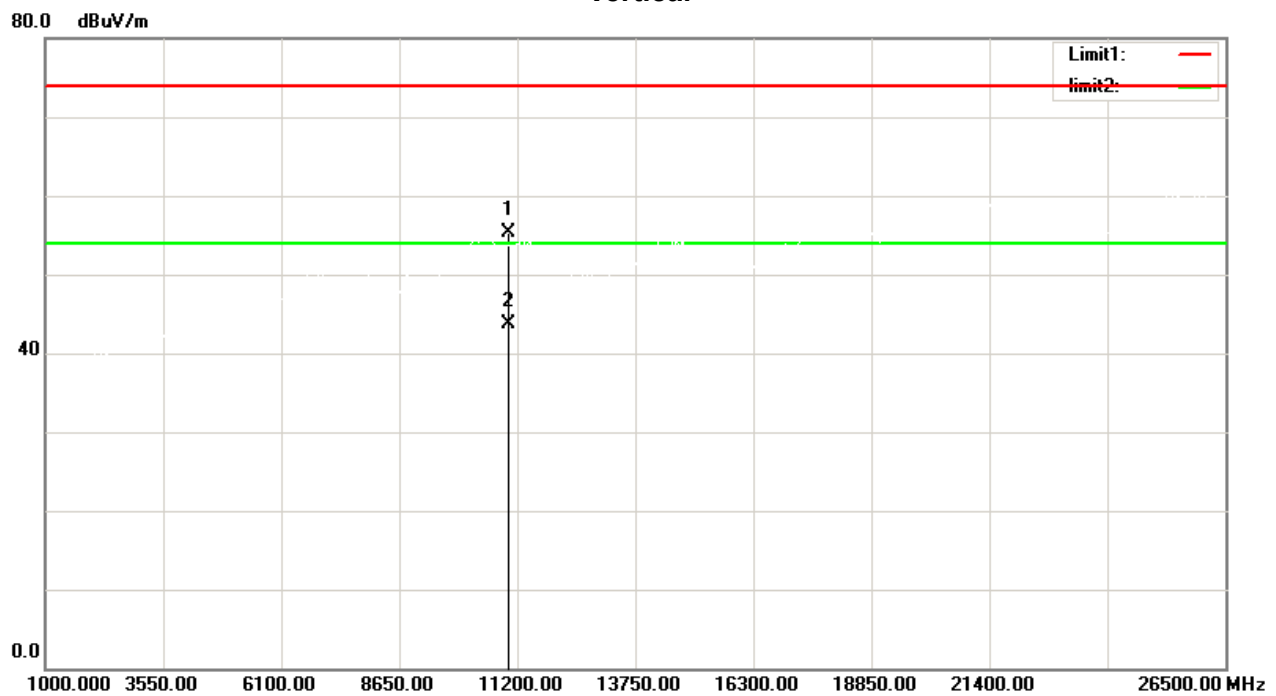


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11000.00	46.96	8.32	55.28	74.00	-18.72	peak	150	90	
2	*	11000.00	35.44	8.32	43.76	54.00	-10.24	AVG	150	90	

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5500 MHz

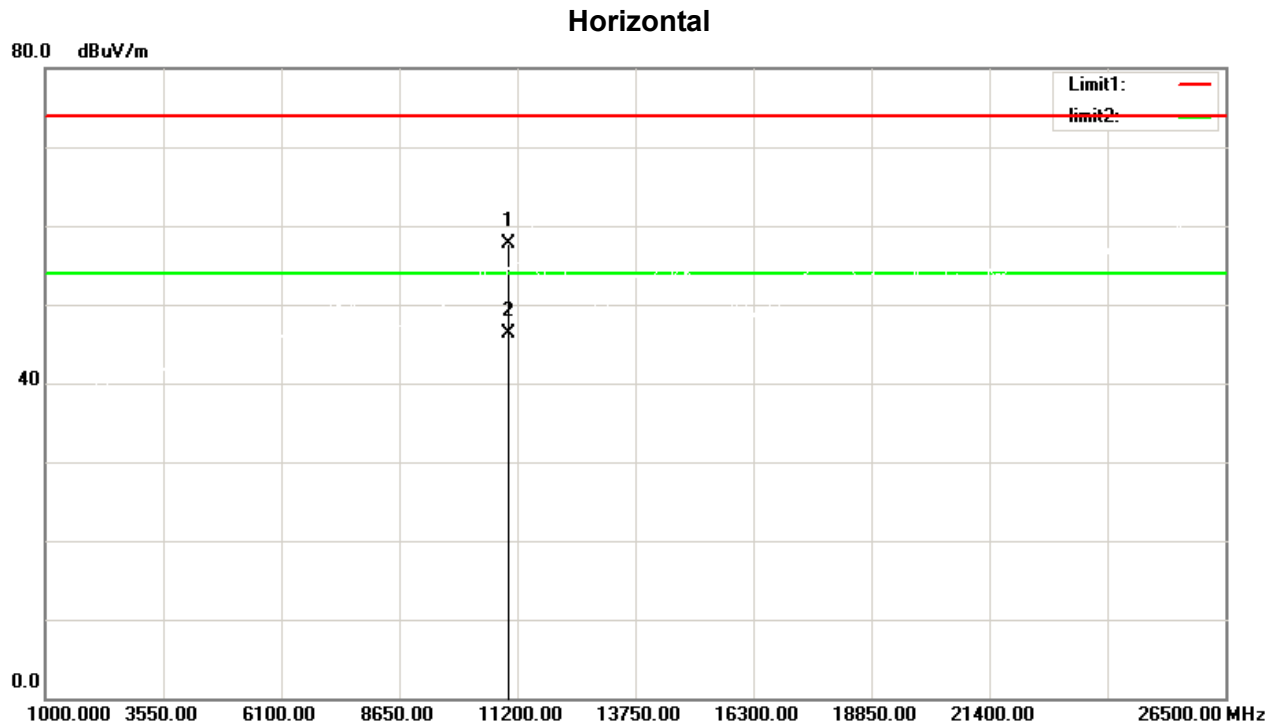


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11000.00	49.31	8.32	57.63	74.00	-16.37	peak	150	43	
2	*	11000.00	38.00	8.32	46.32	54.00	-7.68	AVG	150	43	

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5600 MHz

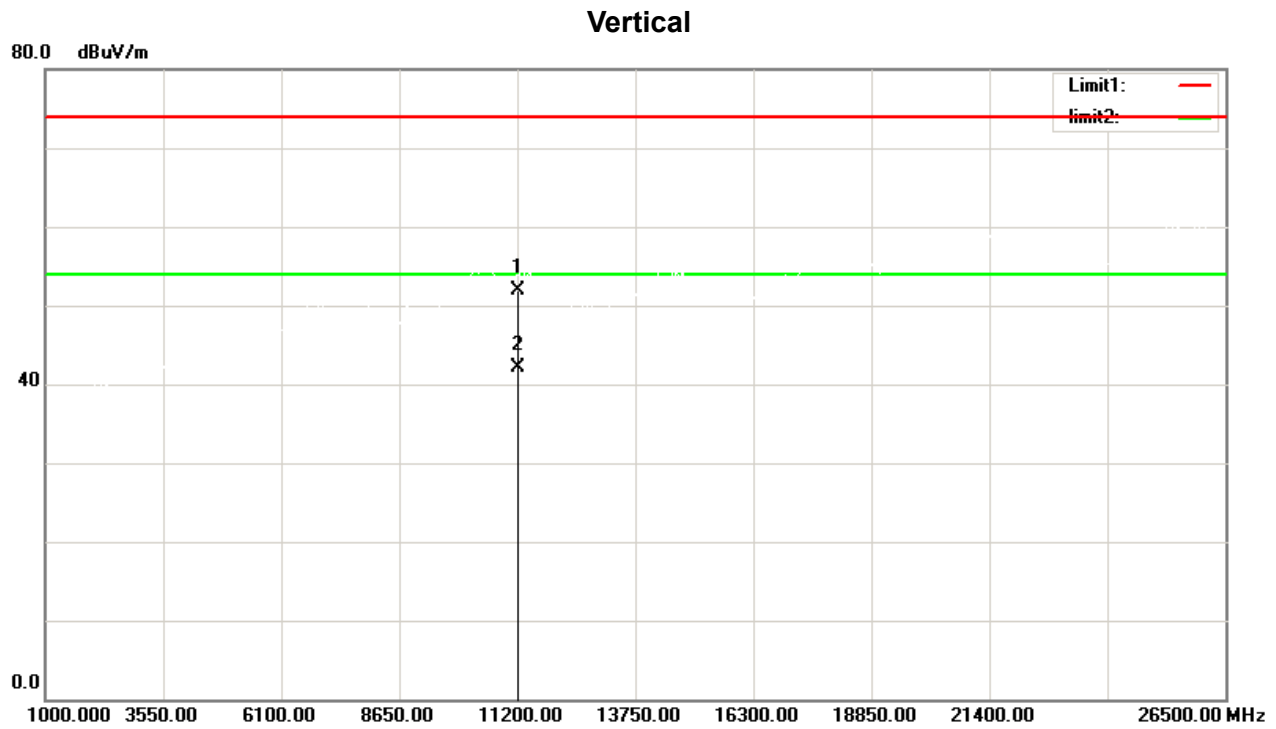


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11200.00	43.67	8.33	52.00	74.00	-22.00	peak	150	92	
2	*	11200.00	33.75	8.33	42.08	54.00	-11.92	AVG	150	92	

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5600 MHz

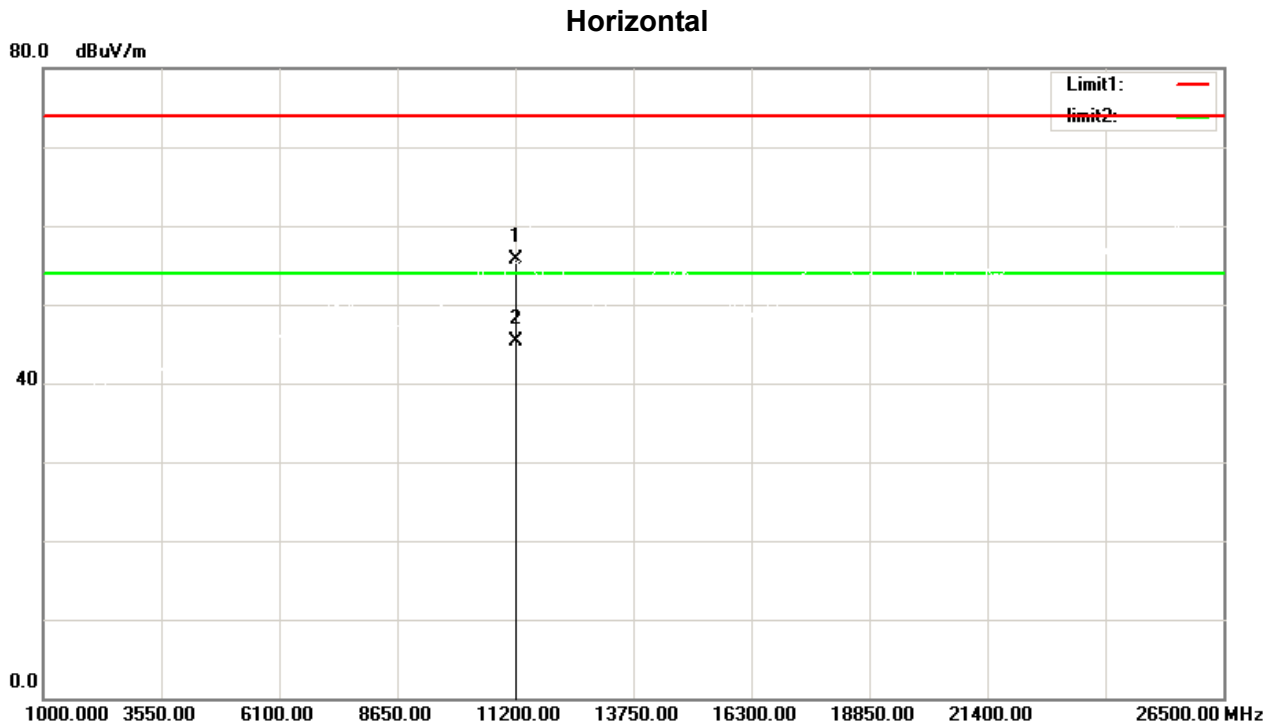


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11200.00	47.38	8.33	55.71	74.00	-18.29	peak	150	54
2	*	11200.00	37.03	8.33	45.36	54.00	-8.64	AVG	150	54

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

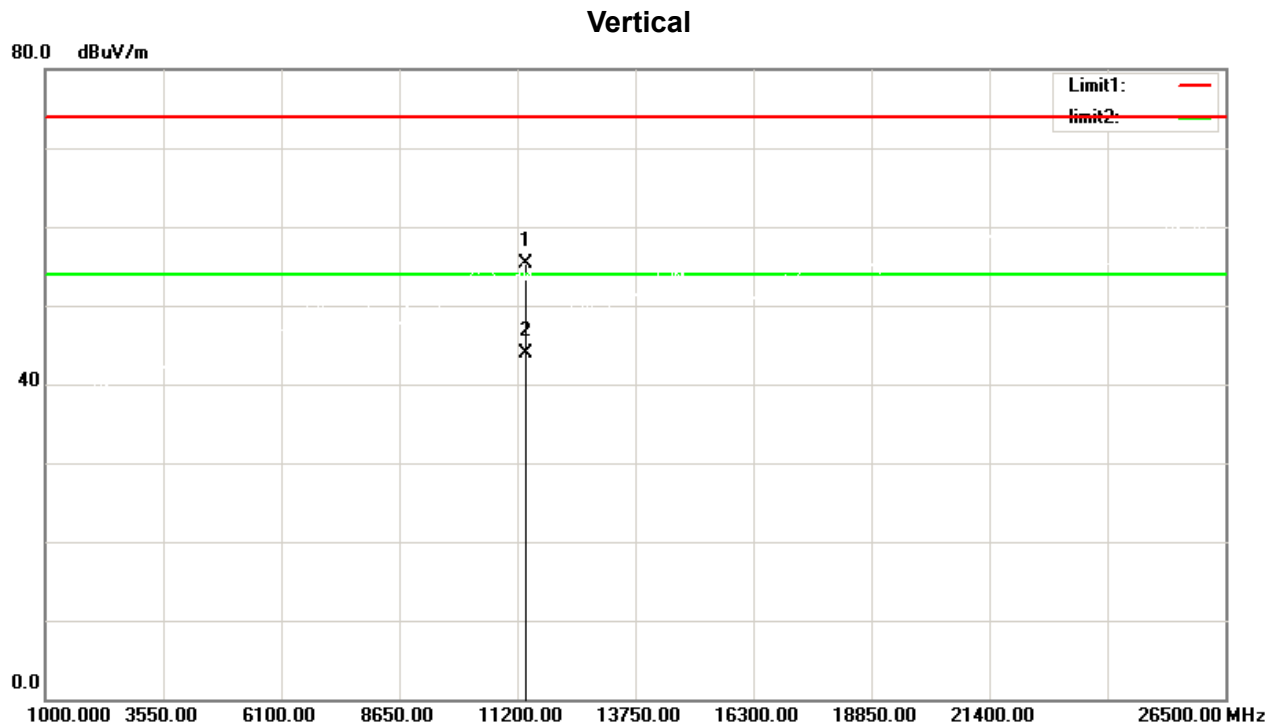

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11400.00	46.91	8.34	55.25	74.00	-18.75	peak	150	84
2	*	11400.00	35.51	8.34	43.85	54.00	-10.15	AVG	150	84

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

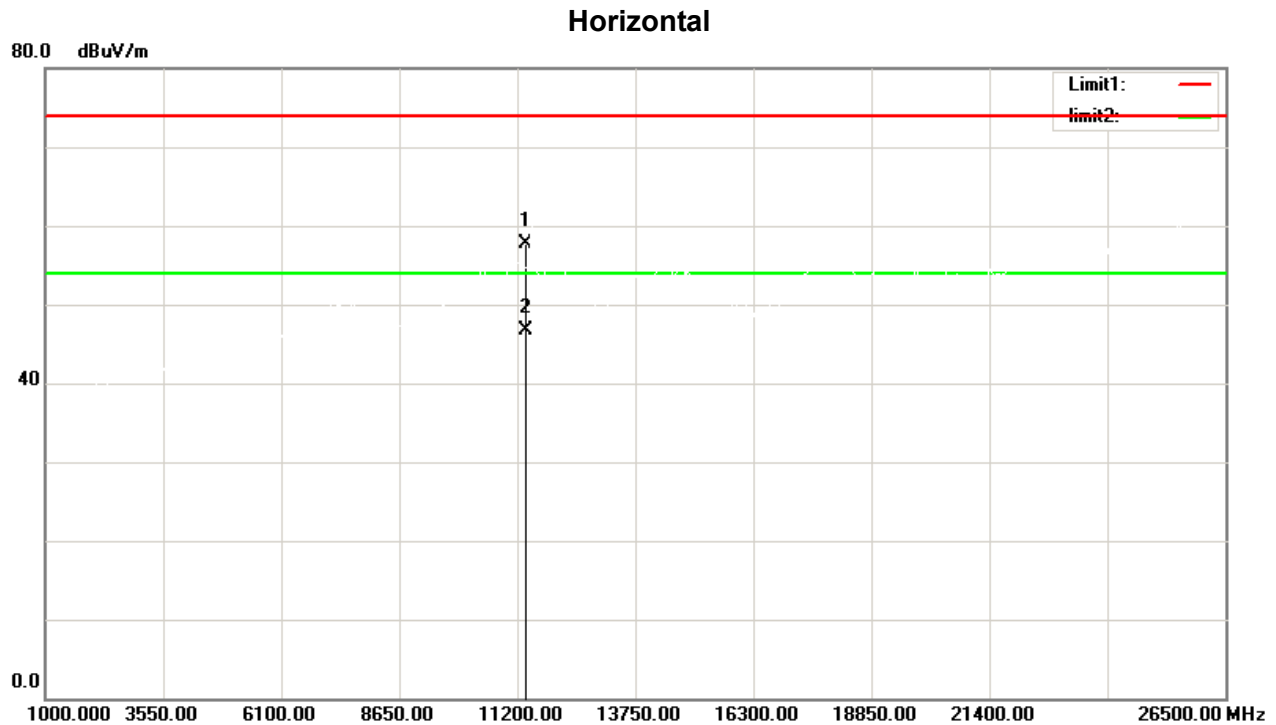


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11400.00	49.35	8.34	57.69	74.00	-16.31	peak	150	42	
2	*	11400.00	38.45	8.34	46.79	54.00	-7.21	AVG	150	42	

Report No.: 24EFSS04089 03661

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz


Vertical

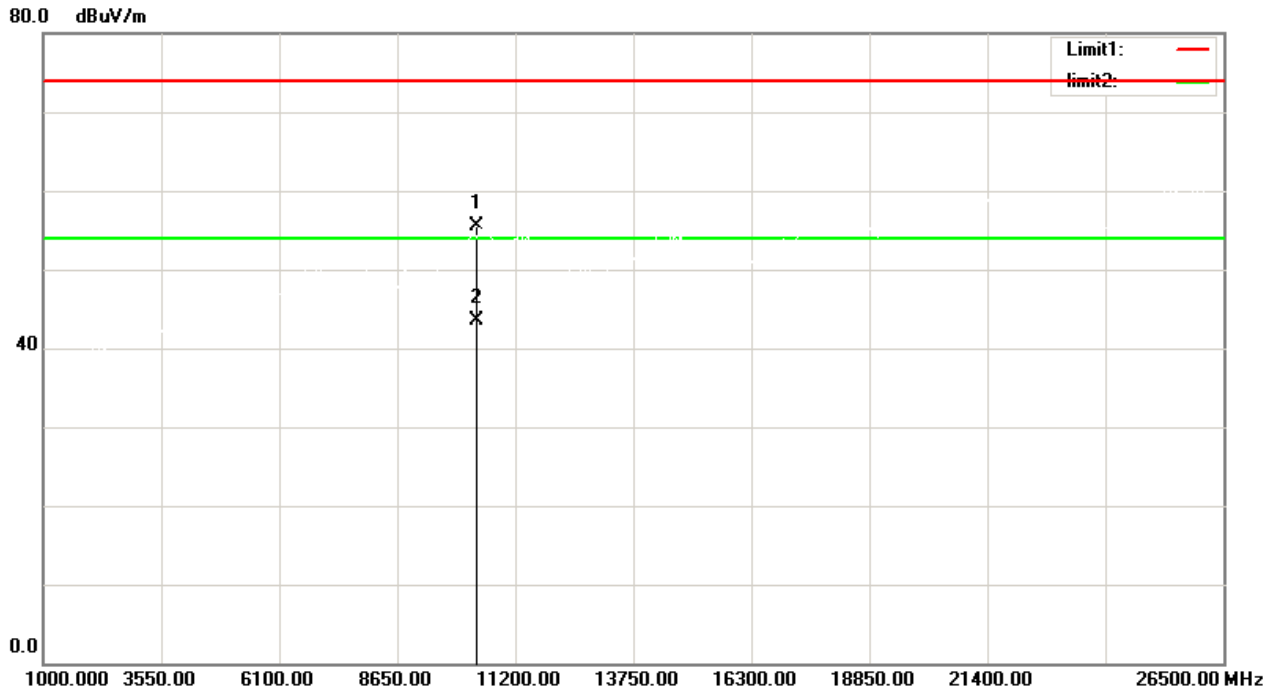

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10380.00	47.53	7.96	55.49	74.00	-18.51	peak	150	96	
2	*	10380.00	35.60	7.96	43.56	54.00	-10.44	AVG	150	96	

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

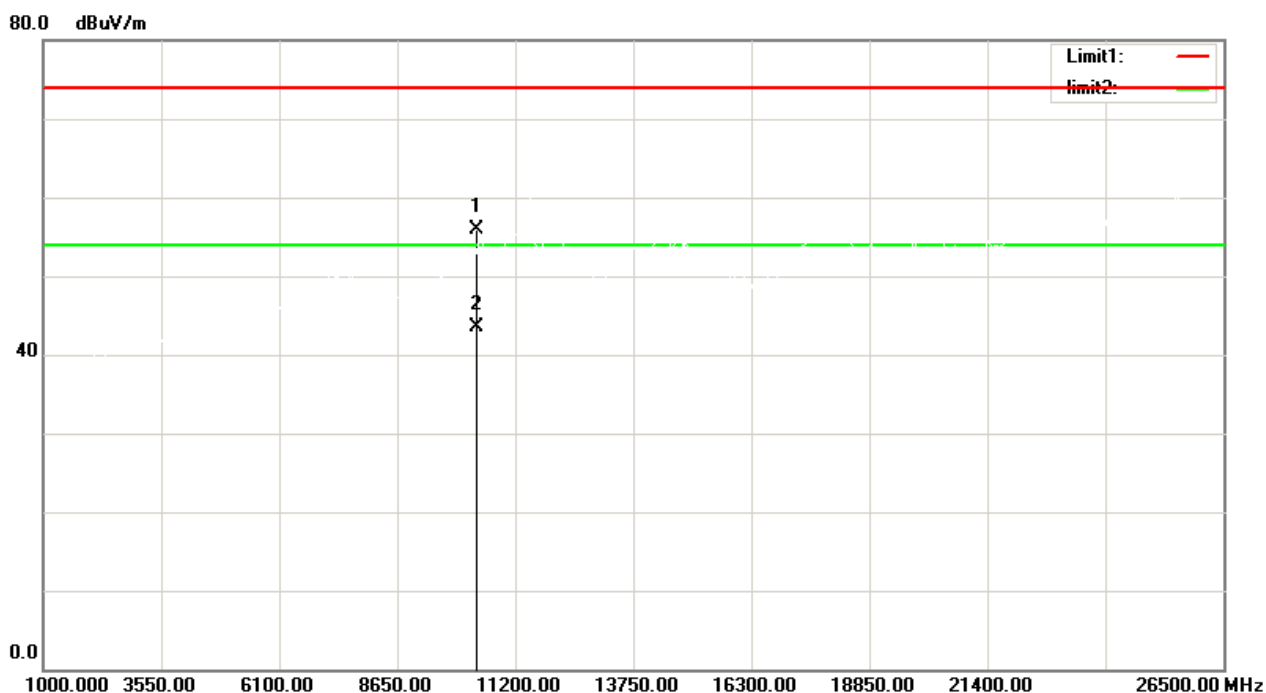


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10380.00	47.94	7.96	55.90	74.00	-18.10	peak	150	40
2	*	10380.00	35.50	7.96	43.46	54.00	-10.54	AVG	150	40

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz


Vertical

80.0 dBuV/m

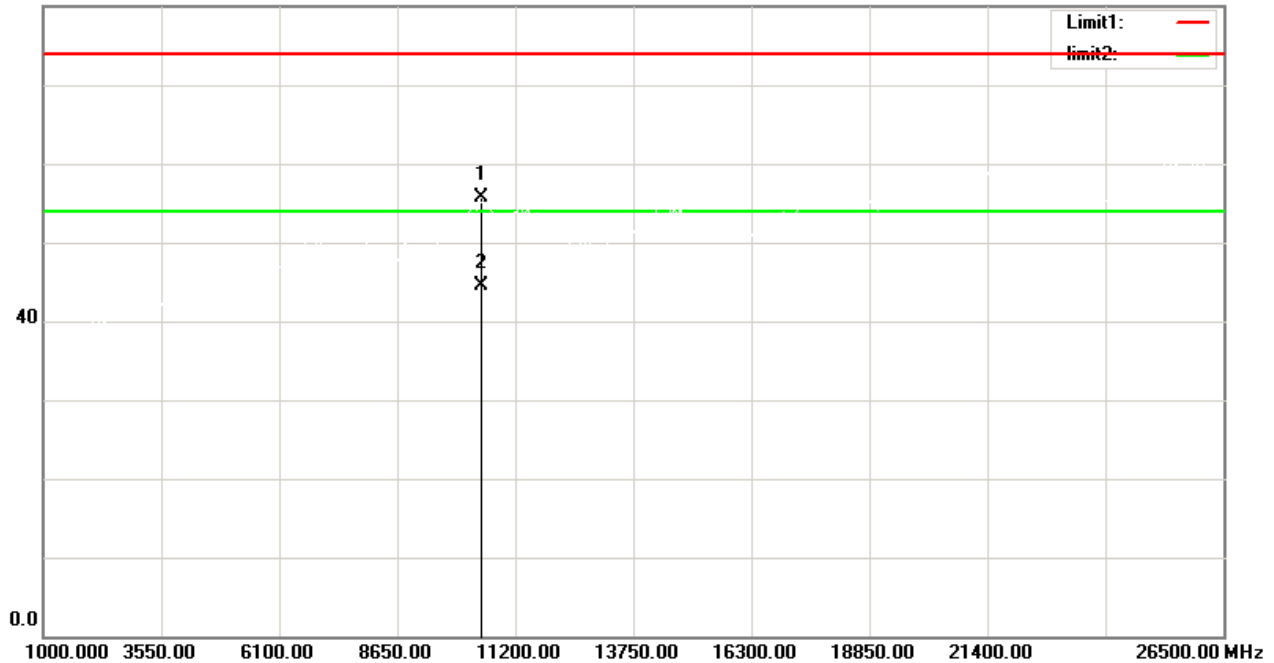

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10460.00	47.42	8.28	55.70	74.00	-18.30	peak	150	85	
2	*	10460.00	36.32	8.28	44.60	54.00	-9.40	AVG	150	85	

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

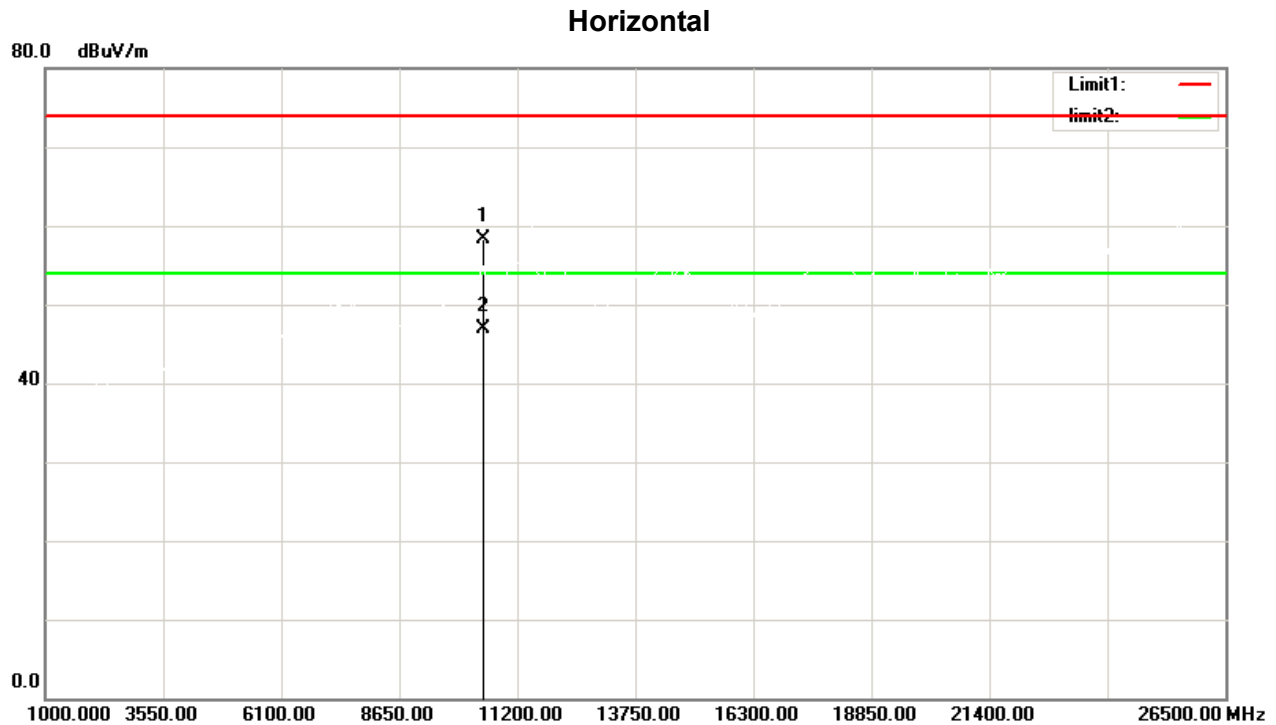


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10460.00	50.08	8.28	58.36	74.00	-15.64	peak	150	32	
2	*	10460.00	38.62	8.28	46.90	54.00	-7.10	AVG	150	32	

Report No.: 24EFSS04089 03661


Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

Vertical

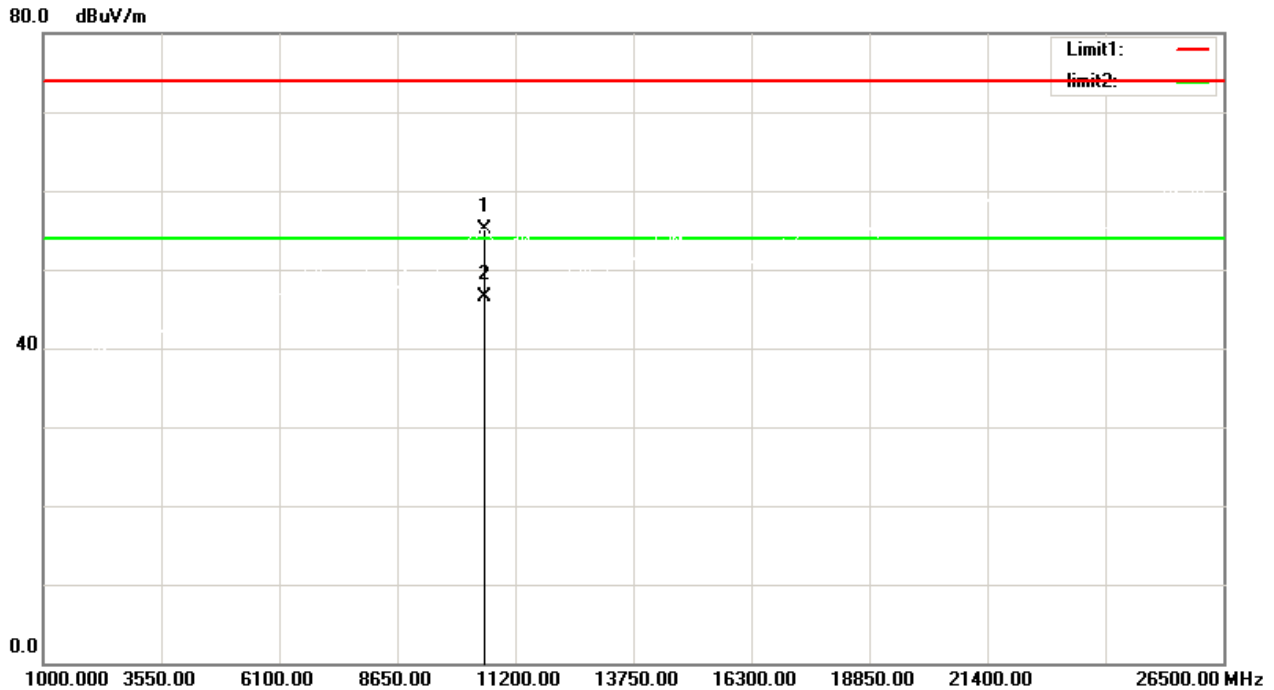

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10540.00	46.73	8.44	55.17	74.00	-18.83	peak	150	88
2	*	10540.00	38.14	8.44	46.58	54.00	-7.42	AVG	150	88

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5270 MHz

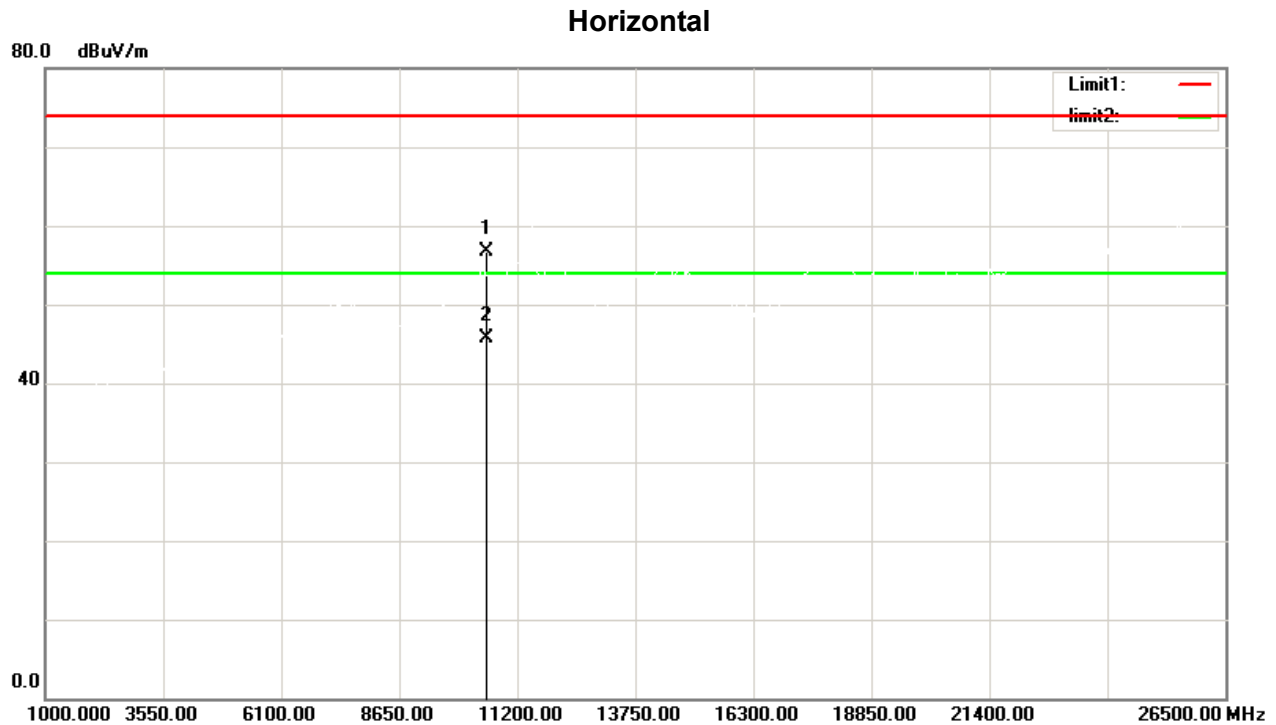


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		10540.00	48.34	8.44	56.78	74.00	-17.22	peak	150	62	
2	*	10540.00	37.25	8.44	45.69	54.00	-8.31	AVG	150	62	

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz


Vertical

80.0 dBuV/m

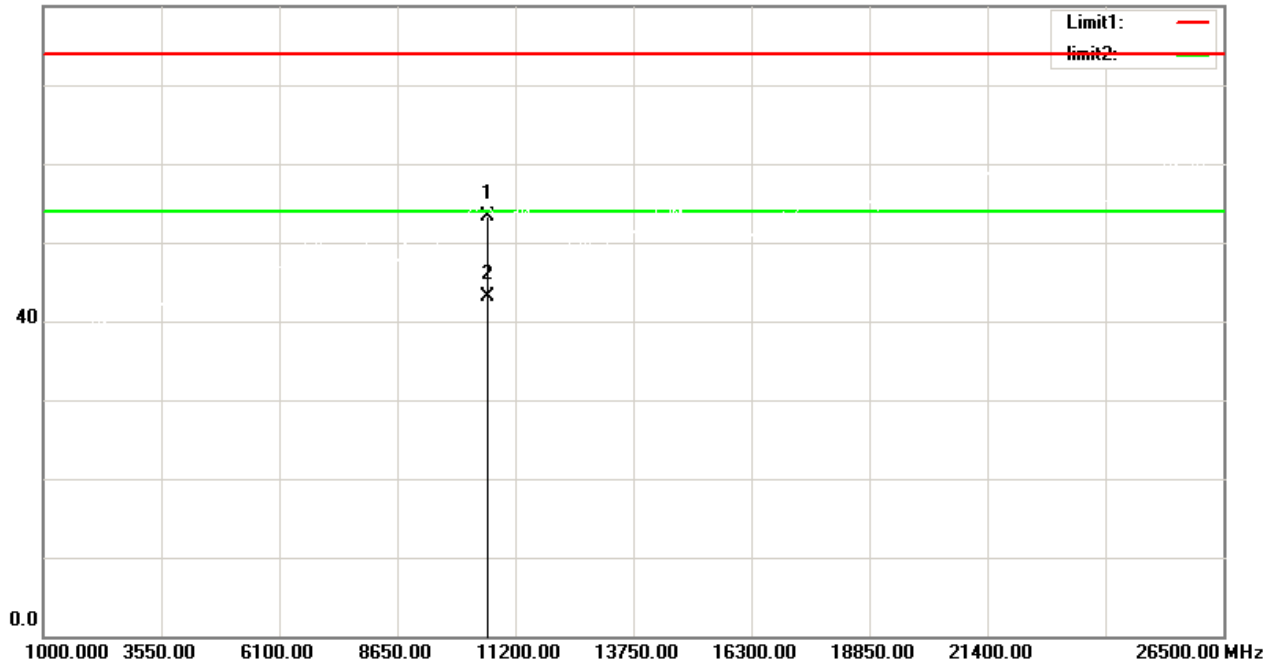

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10620.00	44.85	8.41	53.26	74.00	-20.74	peak	150	87	
2	*	10620.00	34.79	8.41	43.20	54.00	-10.80	AVG	150	87	


Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT40) Mode 5310 MHz

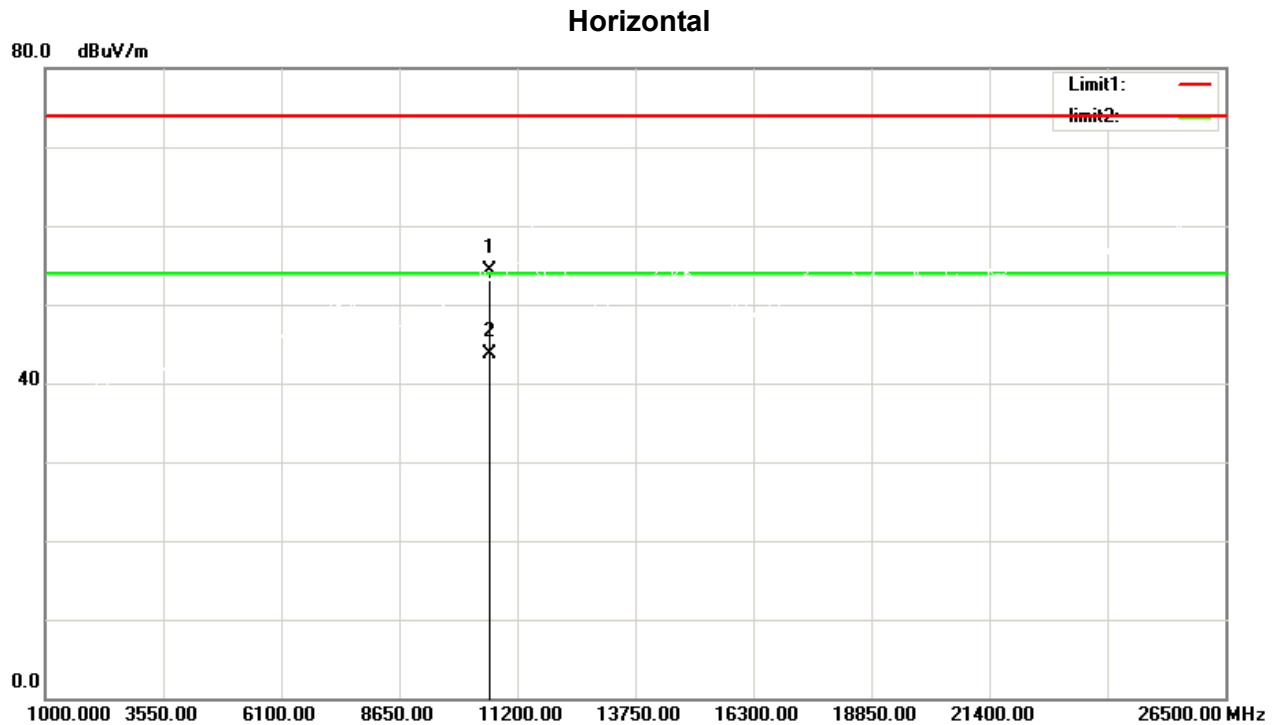

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10620.00	45.85	8.41	54.26	74.00	-19.74	peak	150	49
2	*	10620.00	35.28	8.41	43.69	54.00	-10.31	AVG	150	49

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz


Vertical

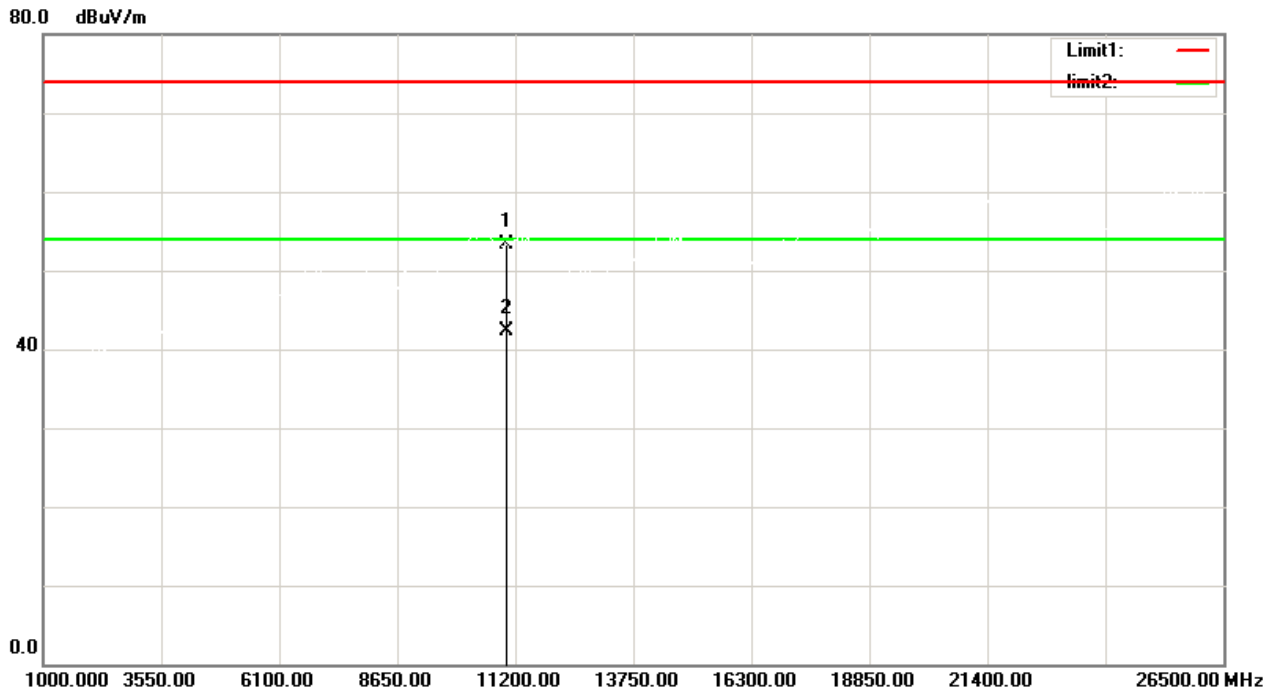

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11020.00	44.92	8.33	53.25	74.00	-20.75	peak	150	86	
2	*	11020.00	33.96	8.33	42.29	54.00	-11.71	AVG	150	86	

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz


Horizontal

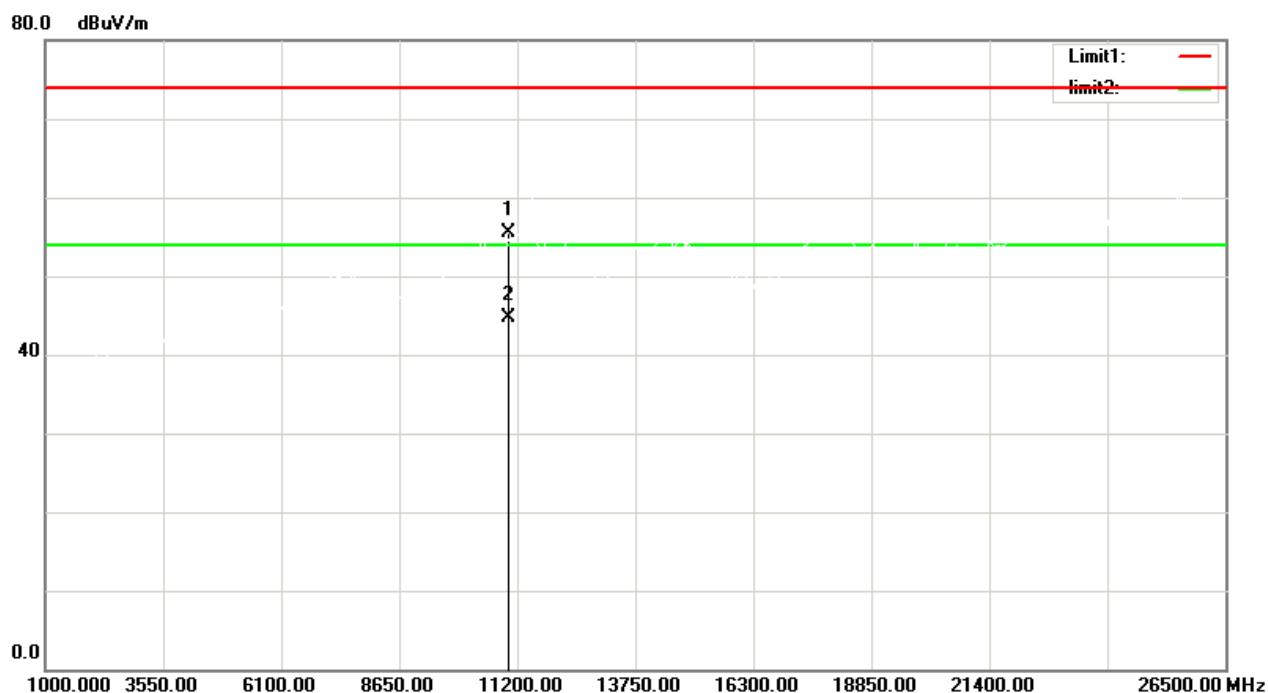

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11020.00	47.23	8.33	55.56	74.00	-18.44	peak	150	43
2	*	11020.00	36.44	8.33	44.77	54.00	-9.23	AVG	150	43


Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5590 MHz

Vertical

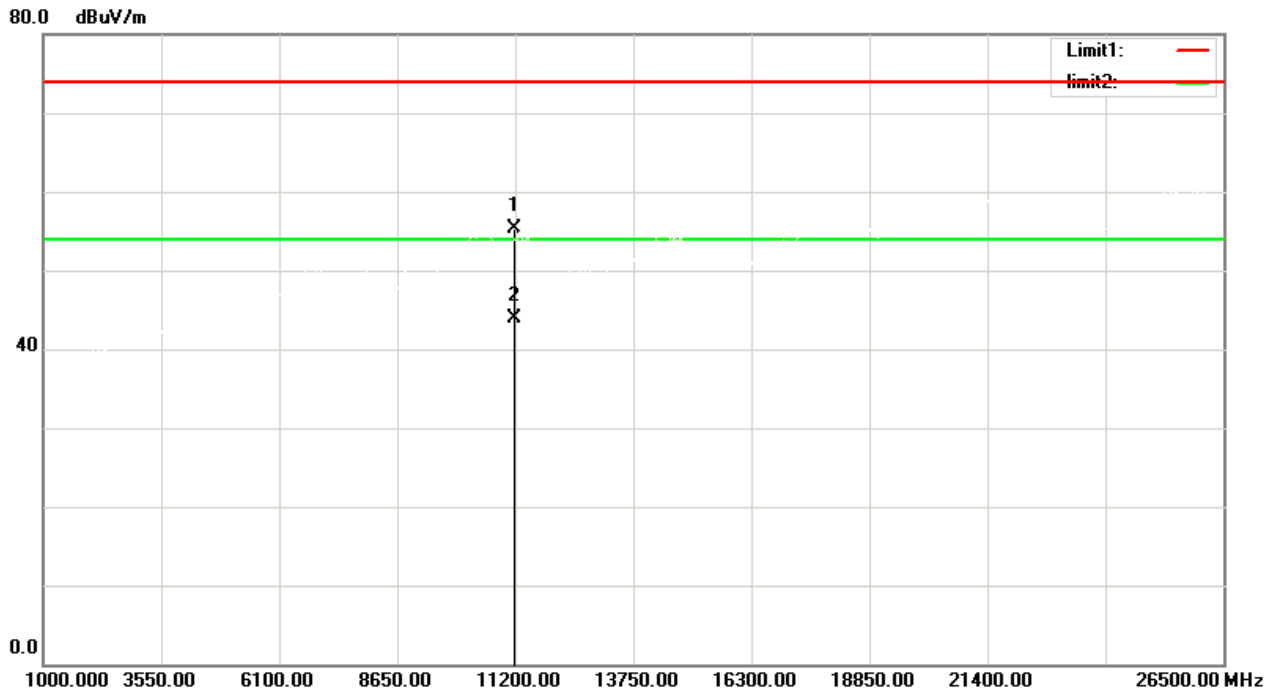

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11180.00	46.91	8.33	55.24	74.00	-18.76	peak	150	97
2	*	11180.00	35.55	8.33	43.88	54.00	-10.12	AVG	150	97


Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5590 MHz

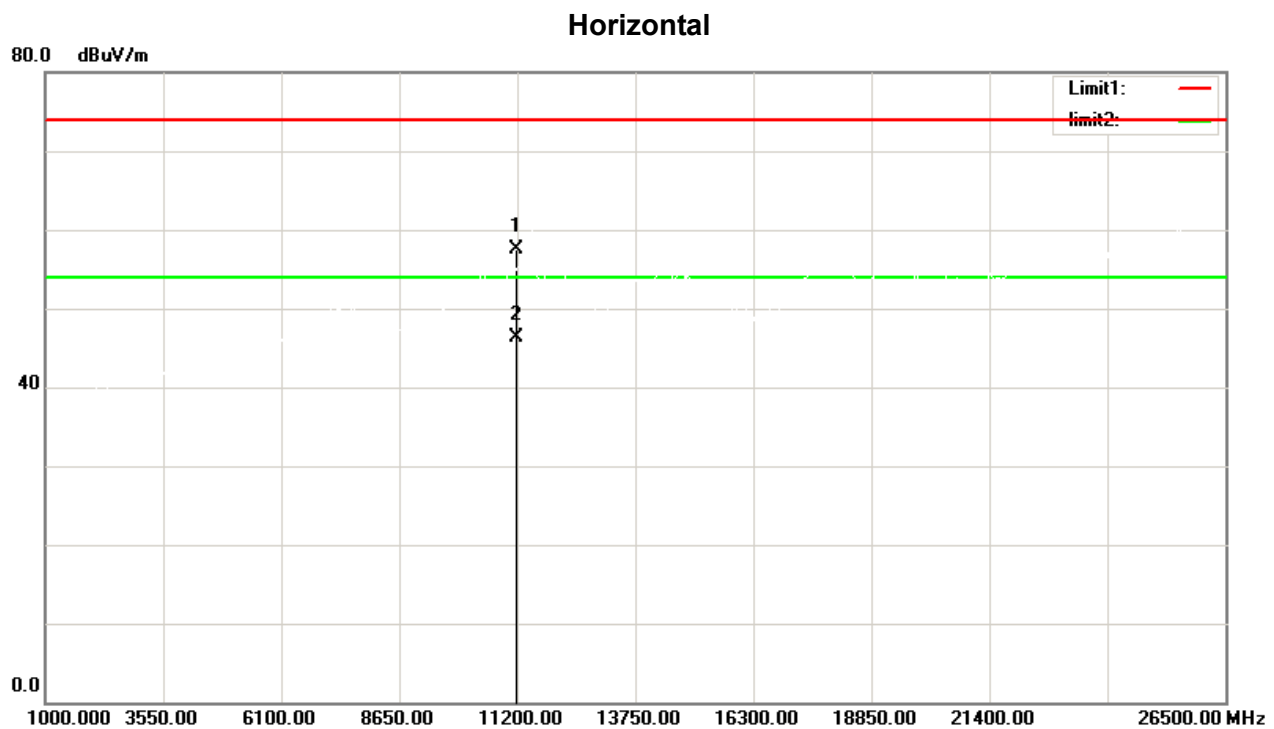

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11180.00	49.17	8.33	57.50	74.00	-16.50	peak	150	39	
2	*	11180.00	38.03	8.33	46.36	54.00	-7.64	AVG	150	39	

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz


Vertical

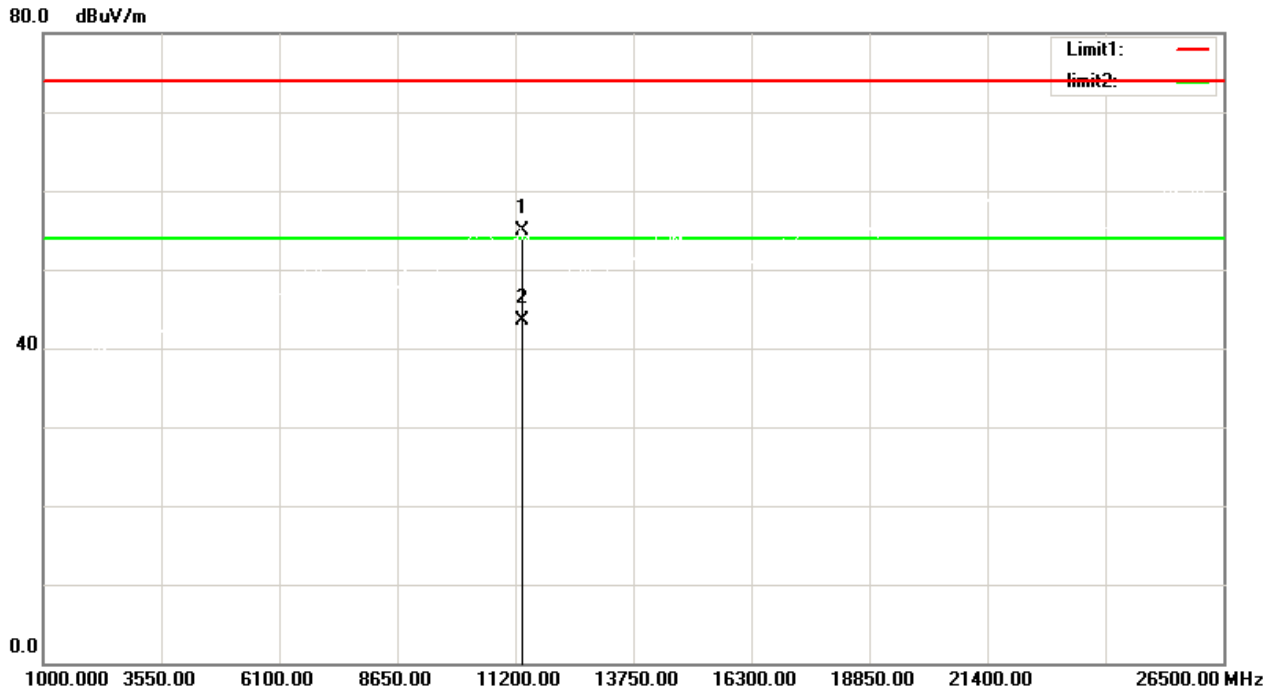

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11340.00	46.53	8.35	54.88	74.00	-19.12	peak	150	84	
2	*	11340.00	35.09	8.35	43.44	54.00	-10.56	AVG	150	84	

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz


Horizontal

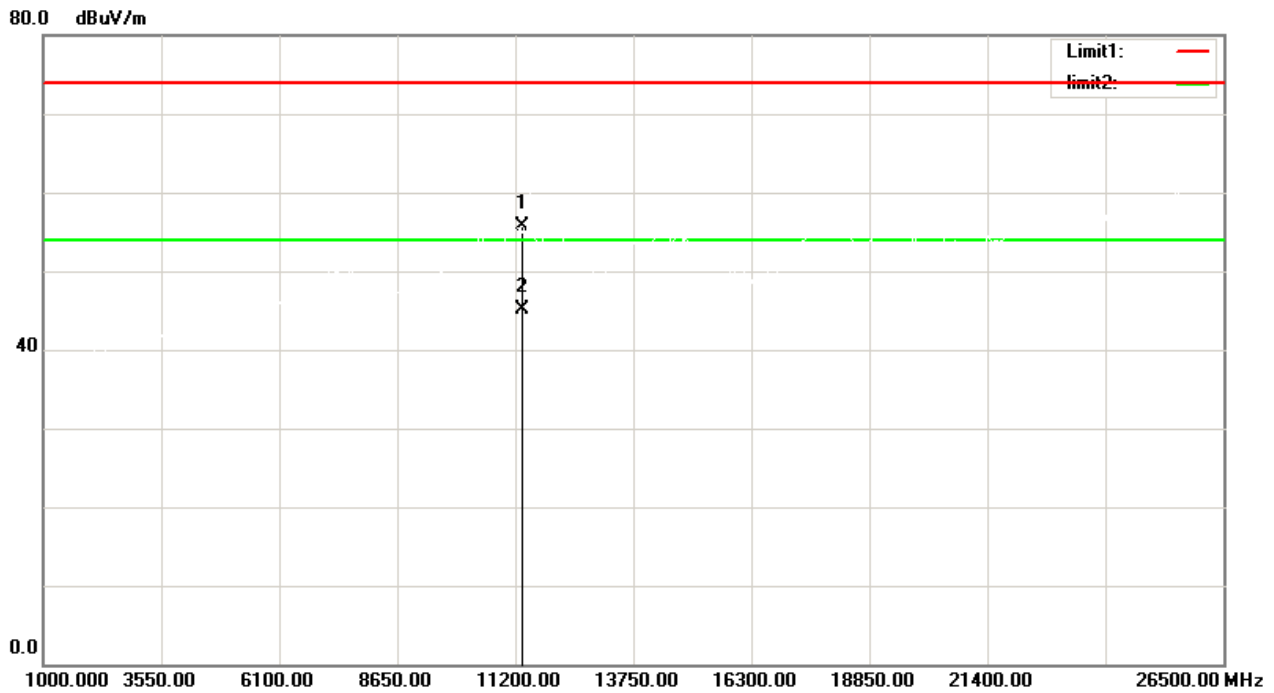

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11340.00	47.33	8.35	55.68	74.00	-18.32	150	35	peak
2	*	11340.00	36.70	8.35	45.05	54.00	-8.95	150	35	AVG


Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

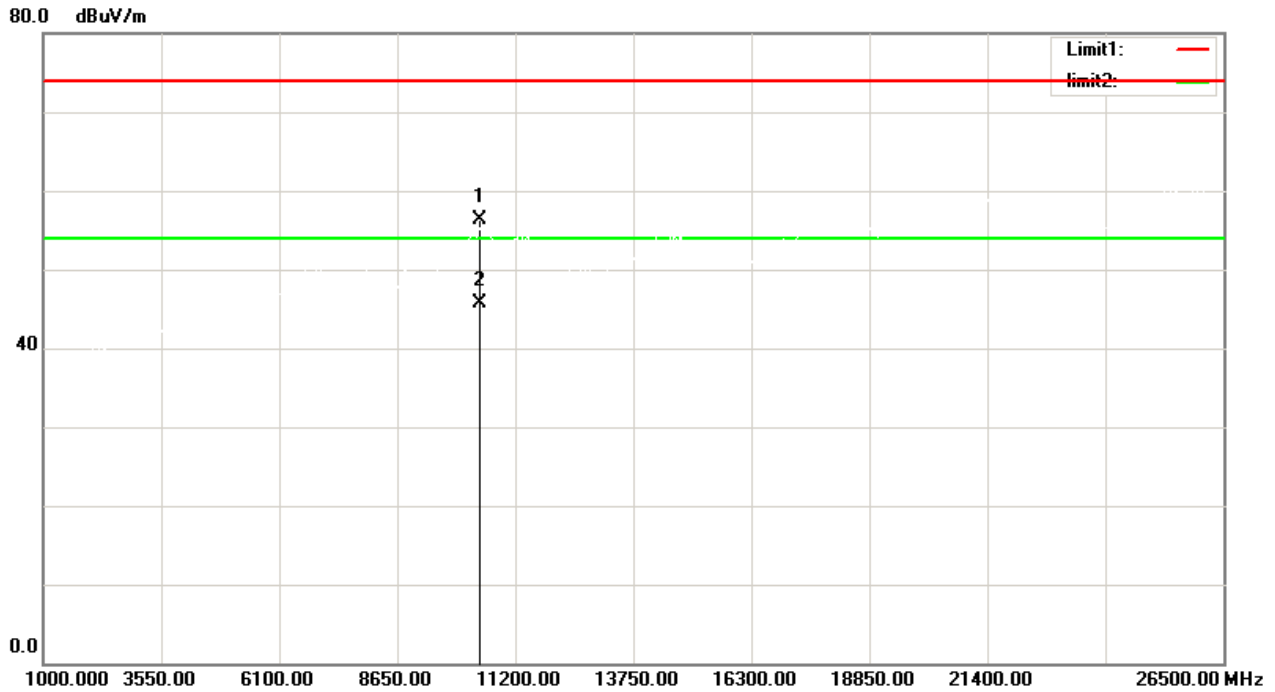

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10420.00	48.27	8.12	56.39	74.00	-17.61	peak	150	79
2	*	10420.00	37.67	8.12	45.79	54.00	-8.21	AVG	150	79

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

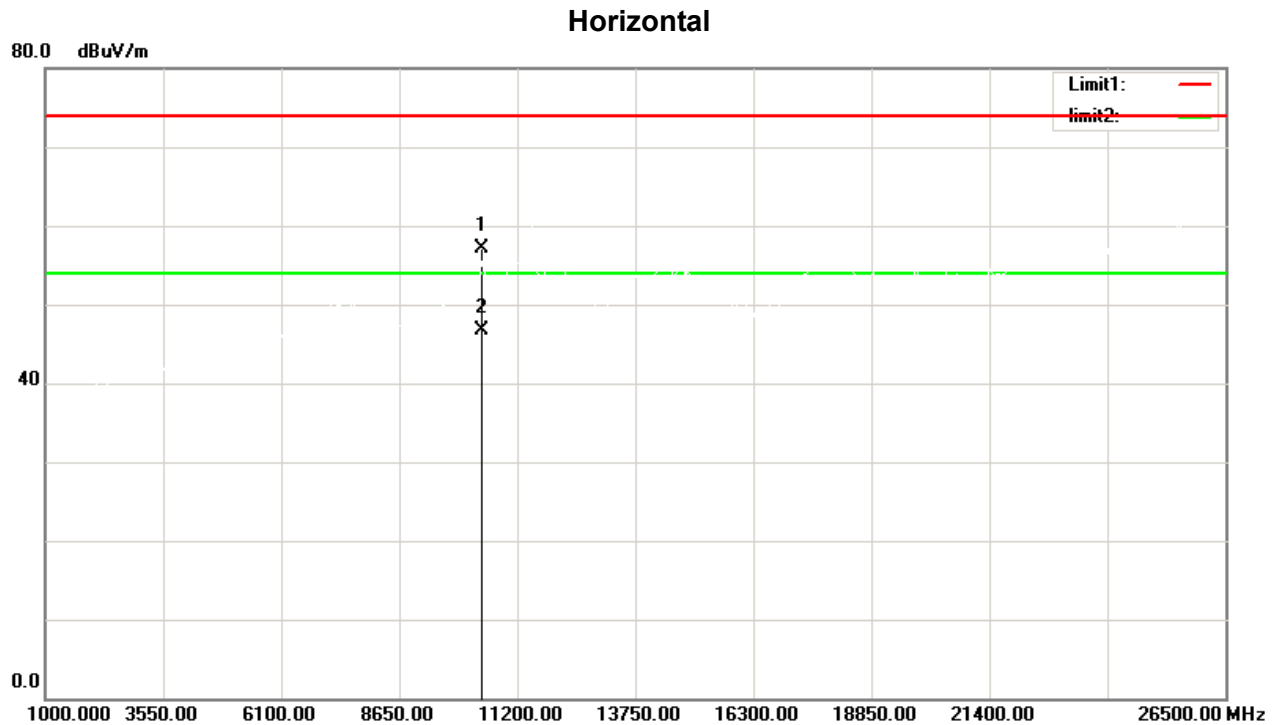


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10420.00	48.99	8.12	57.11	74.00	-16.89	peak	150	46
2	*	10420.00	38.54	8.12	46.66	54.00	-7.34	AVG	150	46

Report No.: 24EFSS04089 03661

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz


Vertical

80.0 dBuV/m

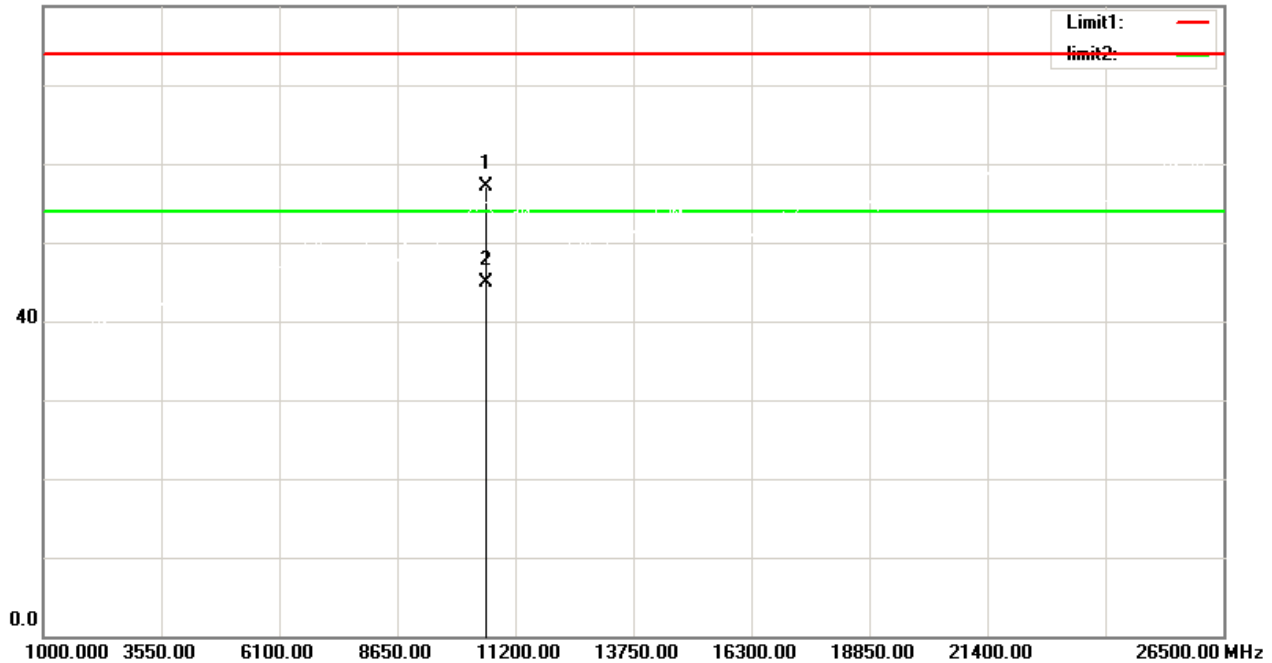

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10580.00	48.67	8.43	57.10	74.00	-16.90	peak	150	74
2	*	10580.00	36.57	8.43	45.00	54.00	-9.00	AVG	150	74

Orthogonal Axis	X
Test Mode	UNII-2A_TX AC (VHT80) Mode 5290 MHz

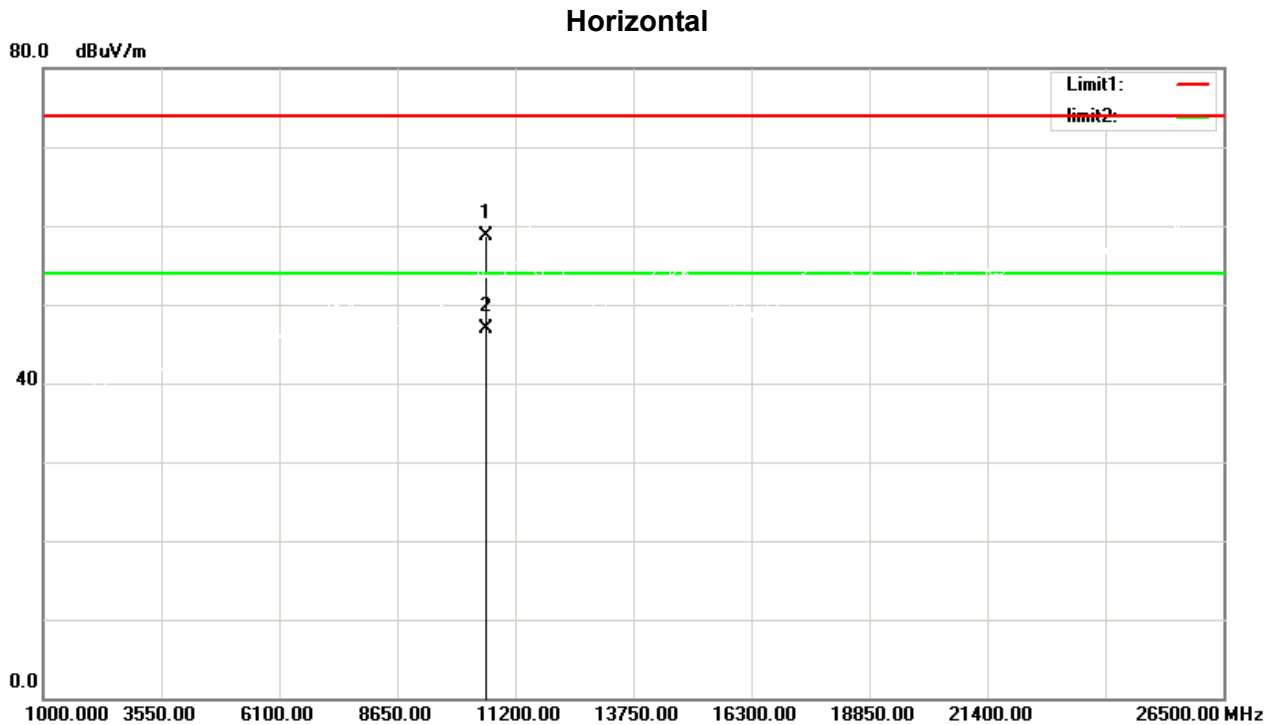


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10580.00	50.31	8.43	58.74	74.00	-15.26	peak	150	36
2	*	10580.00	38.45	8.43	46.88	54.00	-7.12	AVG	150	36

Report No.: 24EFSS04089 03661


Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

Vertical

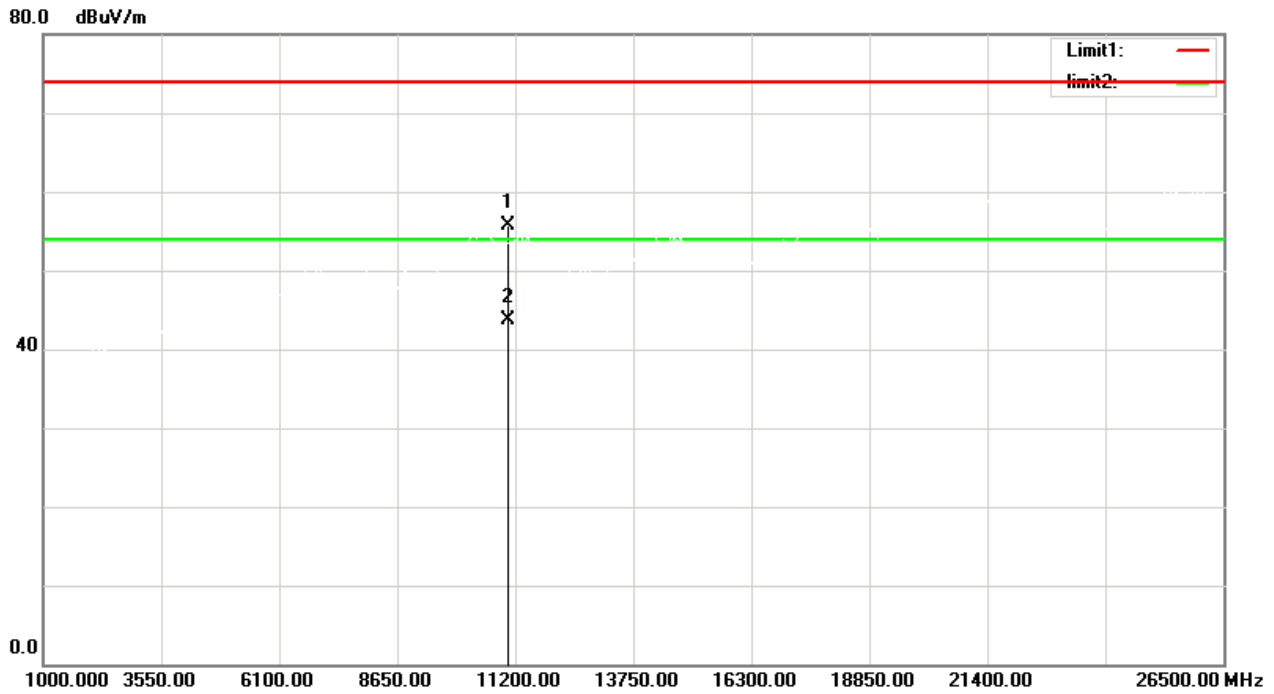

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11060.00	47.42	8.32	55.74	74.00	-18.26	peak	150	79	
2	*	11060.00	35.45	8.32	43.77	54.00	-10.23	AVG	150	79	


Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

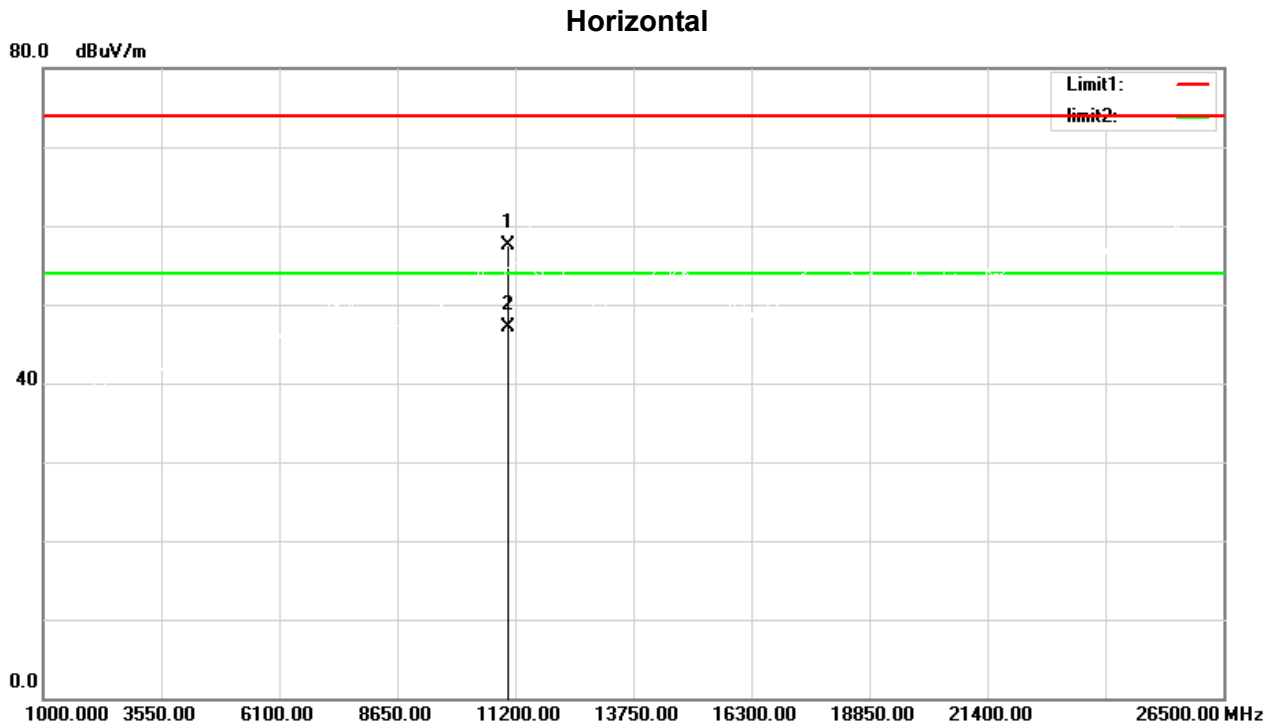

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11060.00	49.21	8.32	57.53	74.00	-16.47	peak	150	35
2	*	11060.00	38.73	8.32	47.05	54.00	-6.95	AVG	150	35


Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz

Vertical

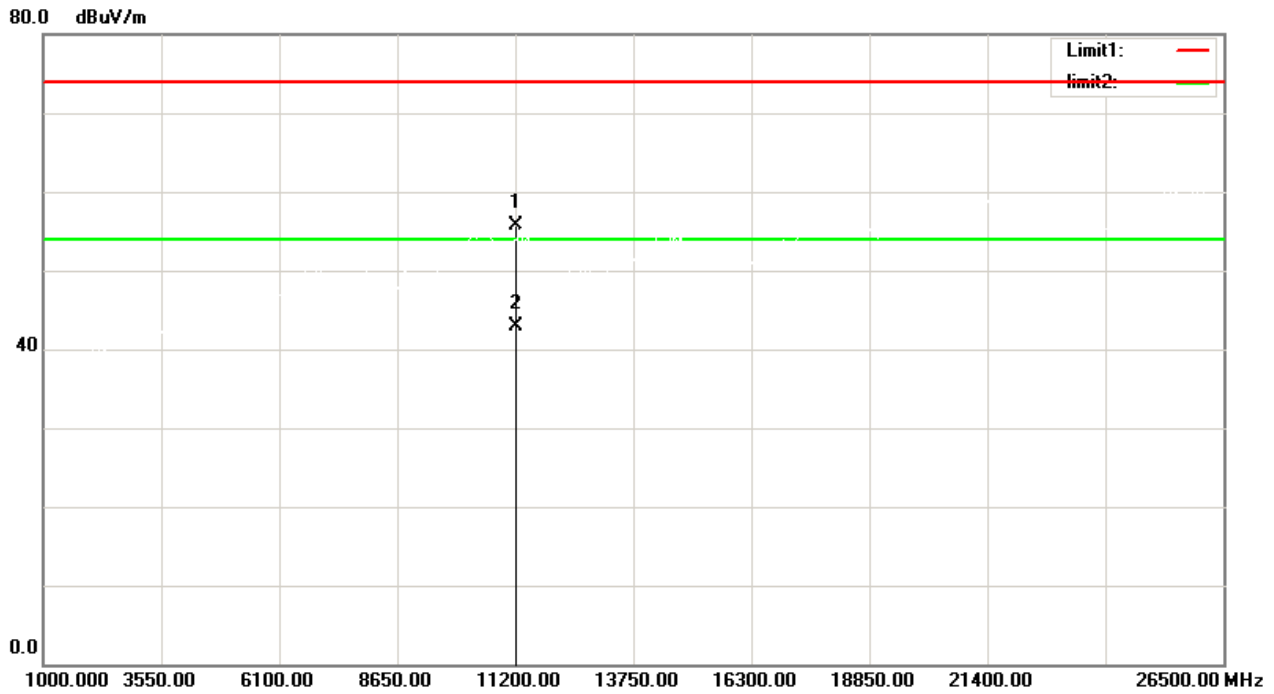


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11220.00	47.35	8.34	55.69	74.00	-18.31	peak	150	96
2	*	11220.00	34.63	8.34	42.97	54.00	-11.03	AVG	150	96

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5610 MHz

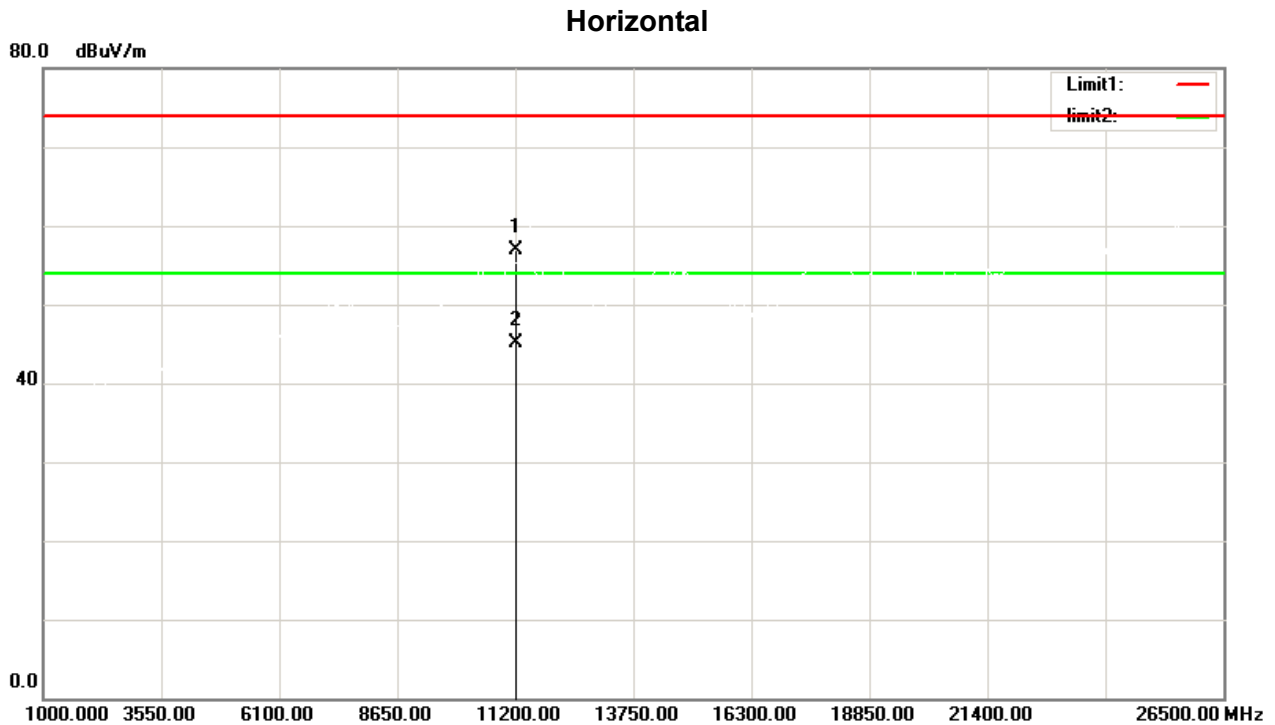


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11220.00	48.66	8.34	57.00	74.00	-17.00	peak	150	46
2	*	11220.00	36.86	8.34	45.20	54.00	-8.80	AVG	150	46

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

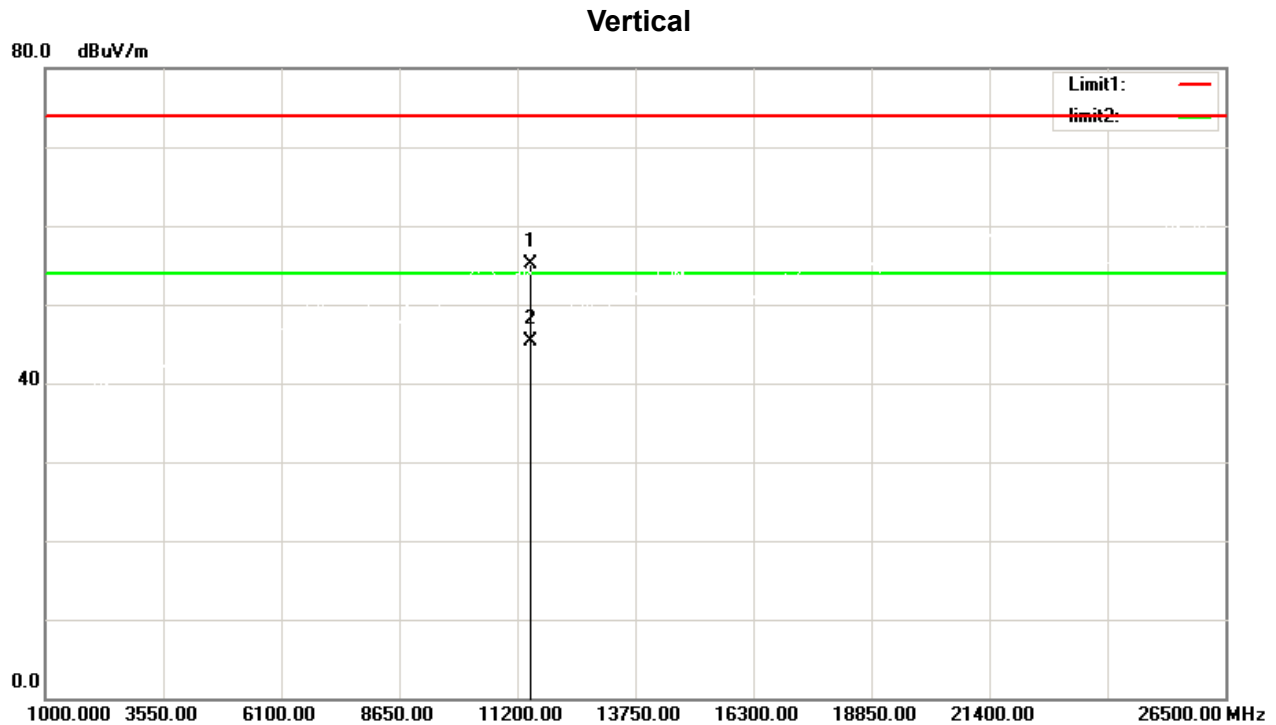

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11490.00	46.70	8.36	55.06	74.00	-18.94	peak	150	88	
2	*	11490.00	37.00	8.36	45.36	54.00	-8.64	AVG	150	88	


Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

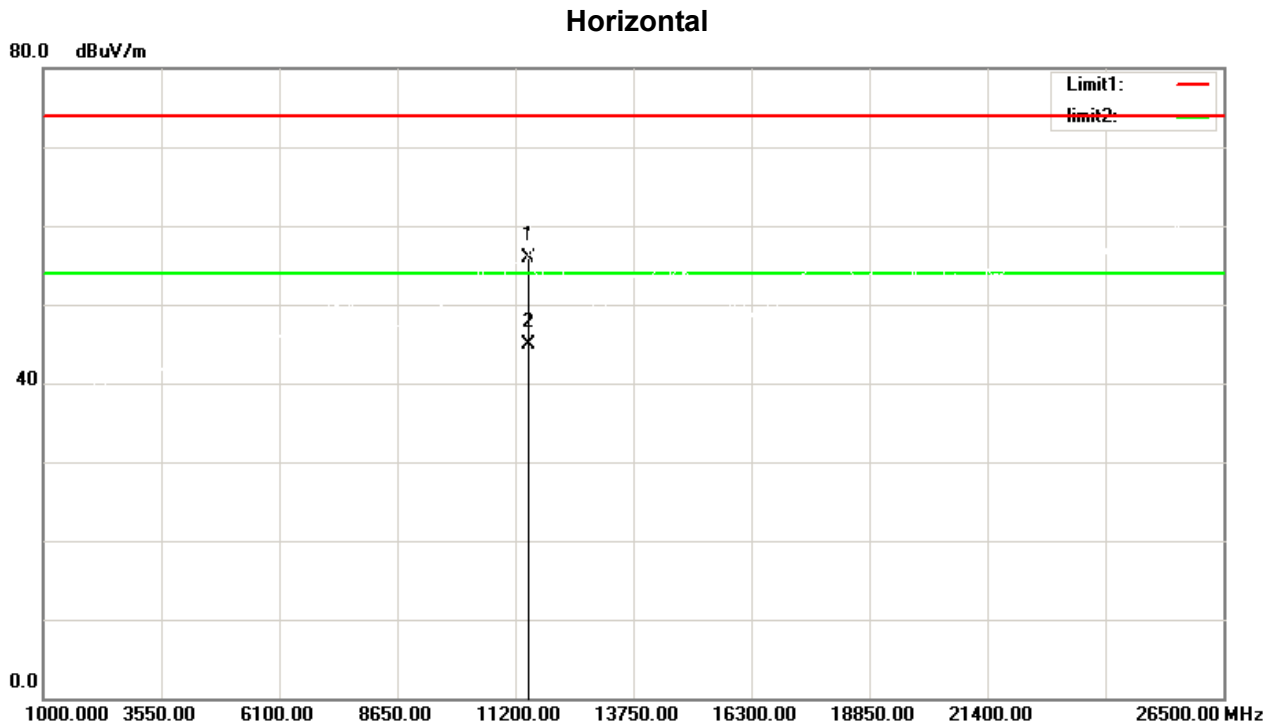

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11490.00	47.62	8.36	55.98	74.00	-18.02	peak	150	40	
2	*	11490.00	36.64	8.36	45.00	54.00	-9.00	AVG	150	40	


Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

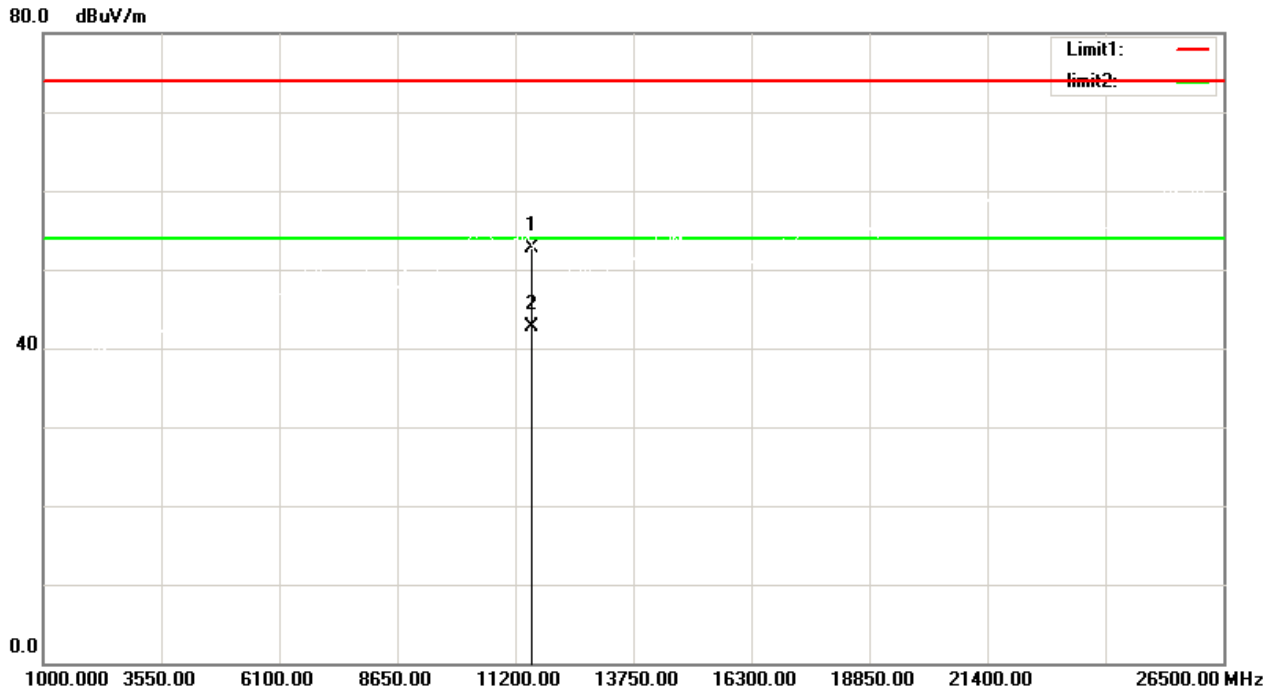

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11570.00	44.24	8.40	52.64	74.00	-21.36	peak	150	86
2	*	11570.00	34.30	8.40	42.70	54.00	-11.30	AVG	150	86

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

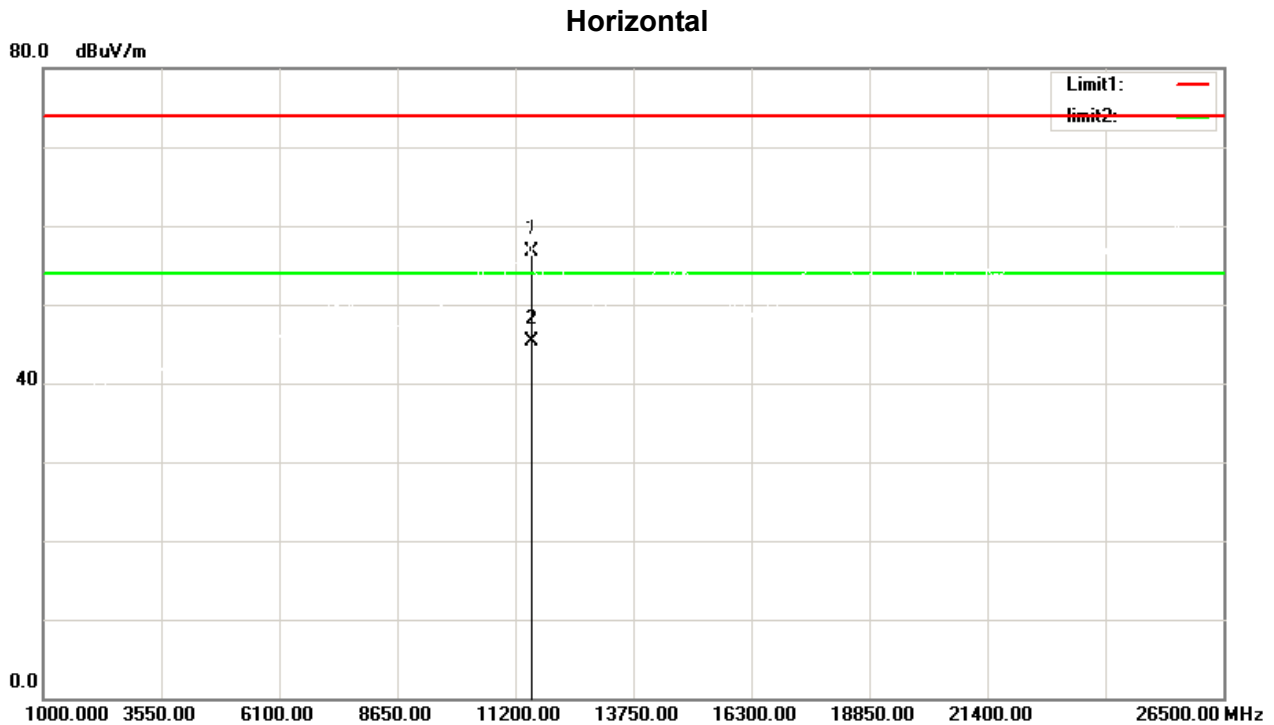


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11570.00	48.38	8.40	56.78	74.00	-17.22	peak	150	45
2	*	11570.00	36.92	8.40	45.32	54.00	-8.68	AVG	150	45

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz


Vertical

80.0 dBuV/m

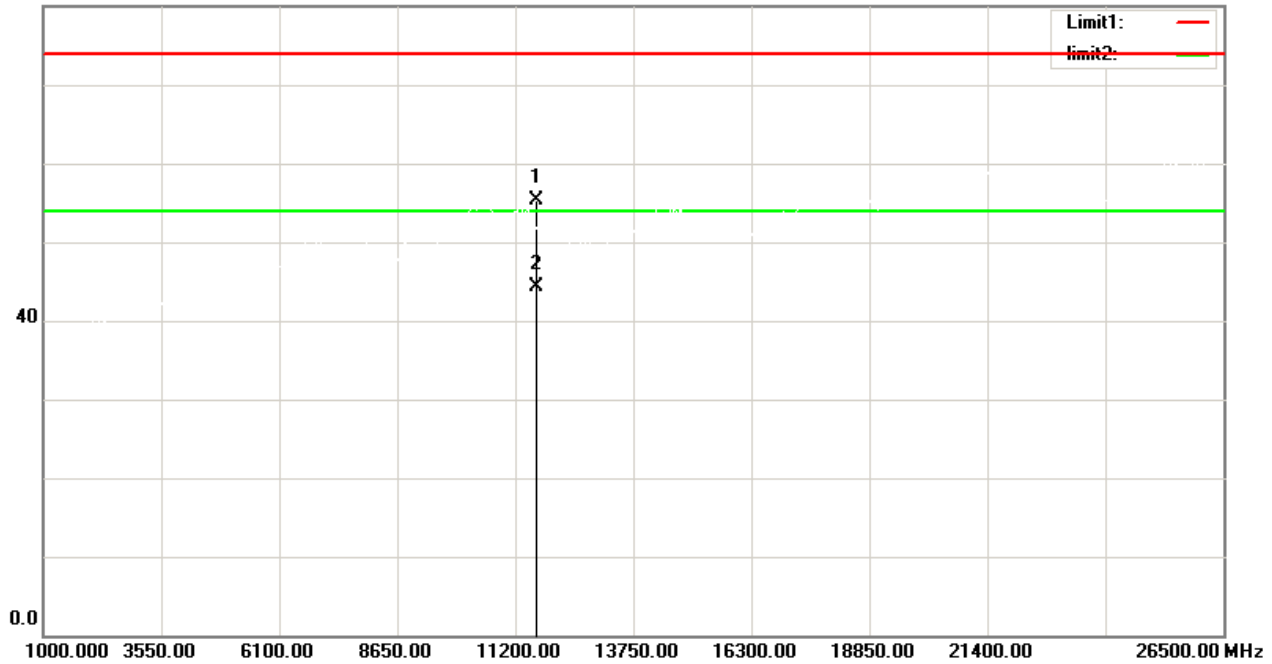

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree	Comment
1		11650.00	46.87	8.45	55.32	74.00	-18.68	peak	150	88
2	*	11650.00	35.83	8.45	44.28	54.00	-9.72	AVG	150	88


Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

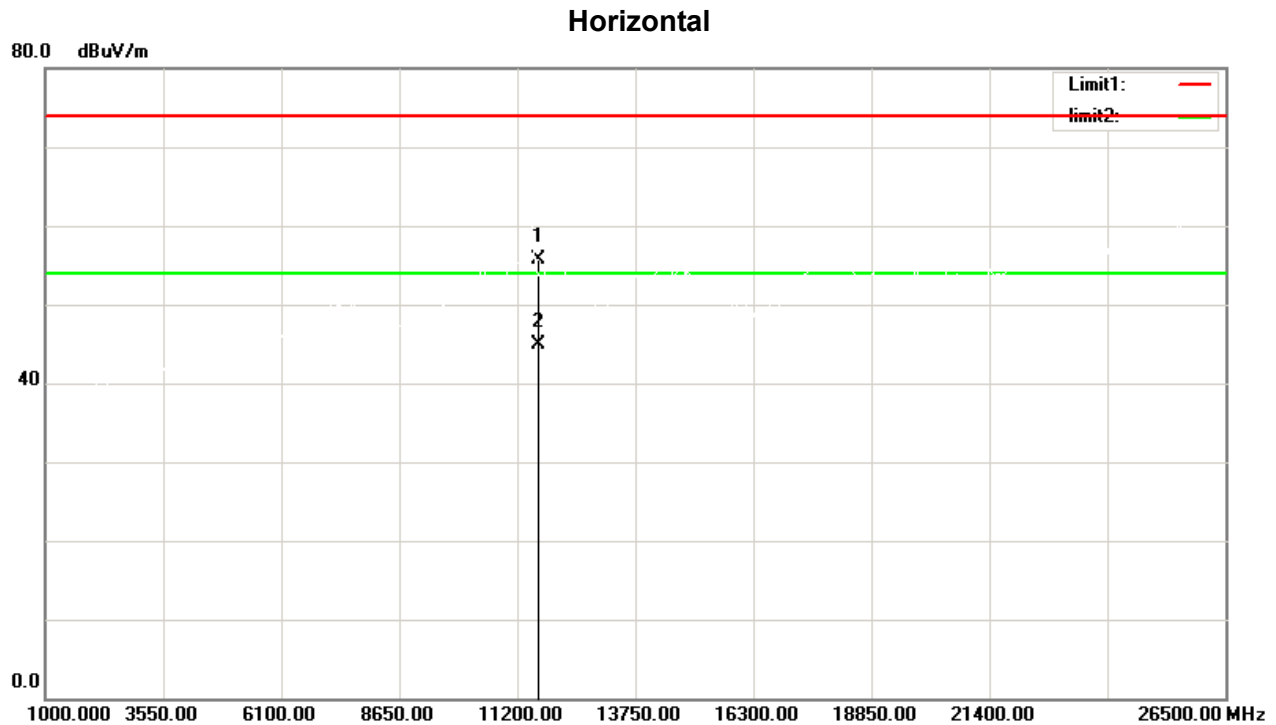

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11650.00	47.19	8.45	55.64	74.00	-18.36	peak	150	44
2	*	11650.00	36.50	8.45	44.95	54.00	-9.05	AVG	150	44


Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

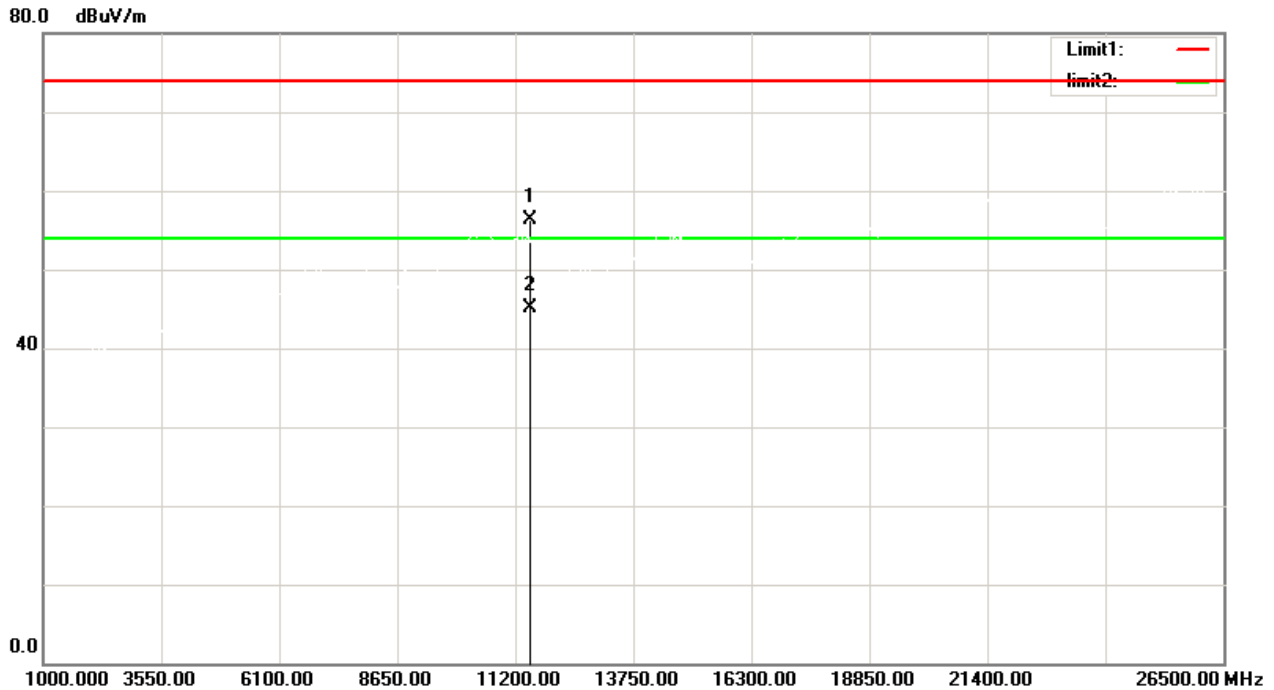

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11510.00	47.86	8.35	56.21	74.00	-17.79	peak	150	76
2	*	11510.00	36.81	8.35	45.16	54.00	-8.84	AVG	150	76


Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

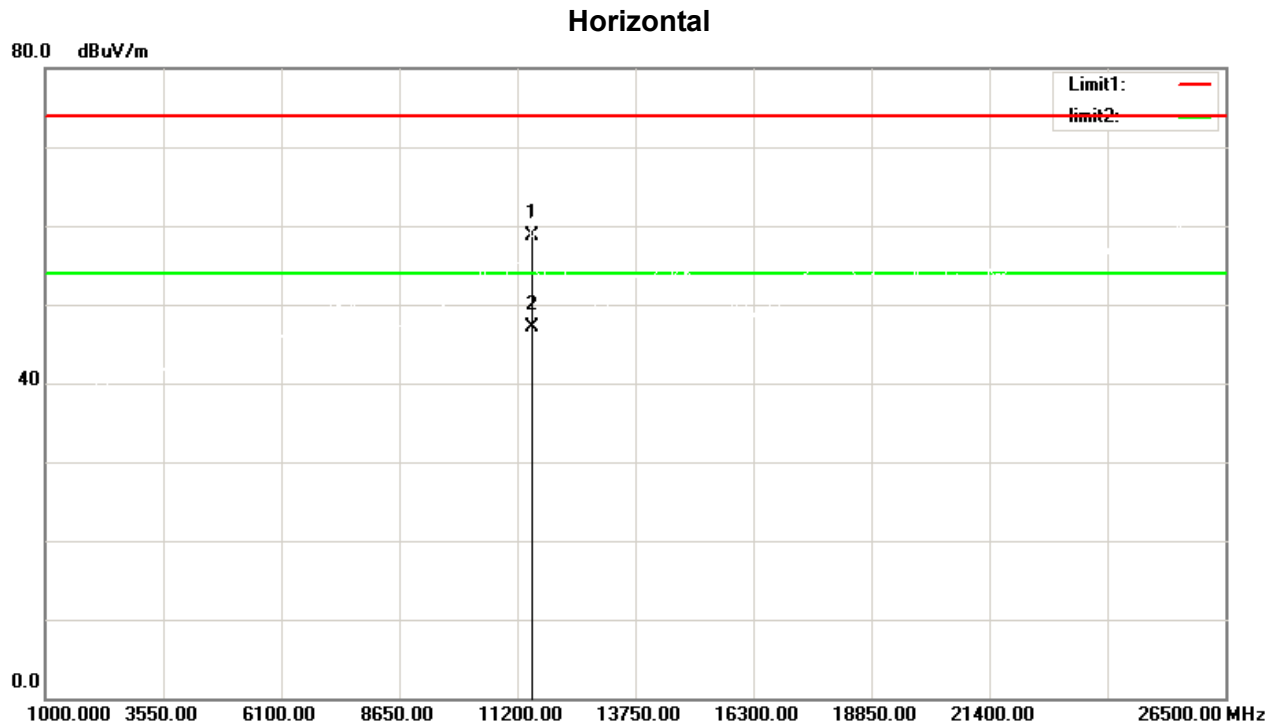

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11510.00	50.29	8.35	58.64	74.00	-15.36	peak	150	42
2	*	11510.00	38.80	8.35	47.15	54.00	-6.85	AVG	150	42

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz


Vertical

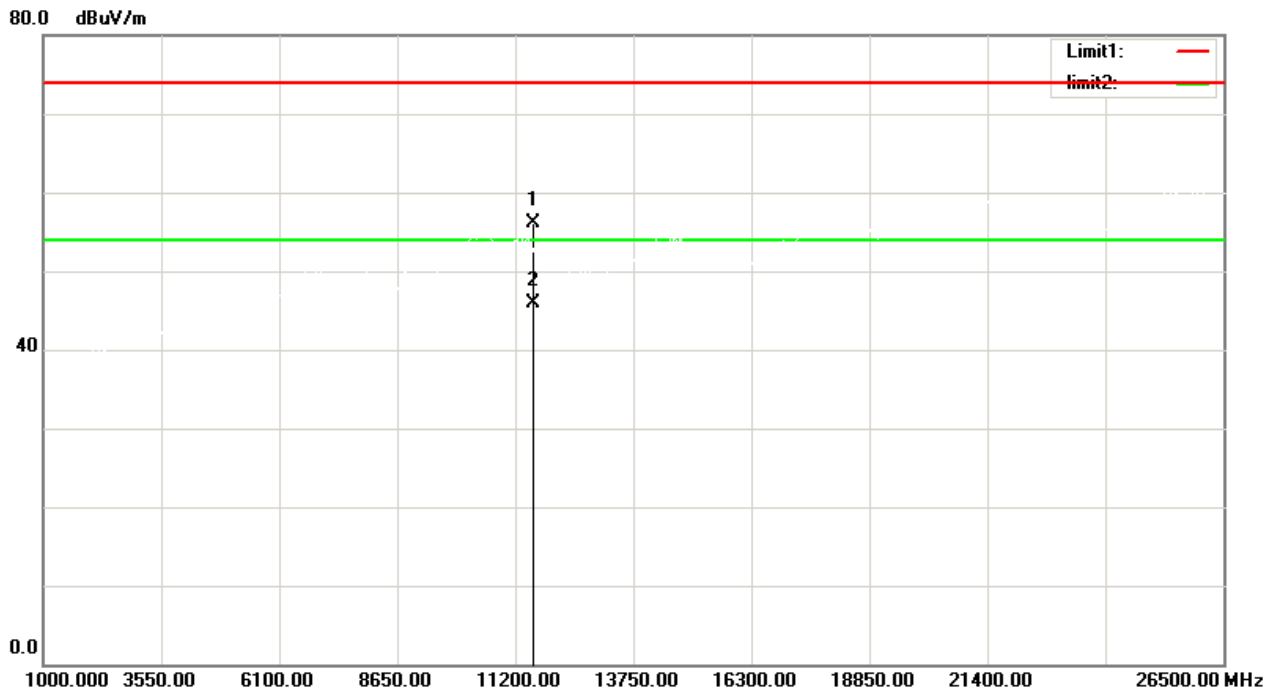

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11590.00	47.70	8.41	56.11	74.00	-17.89	peak	150	96
2	*	11590.00	37.58	8.41	45.99	54.00	-8.01	AVG	150	96

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz


Horizontal

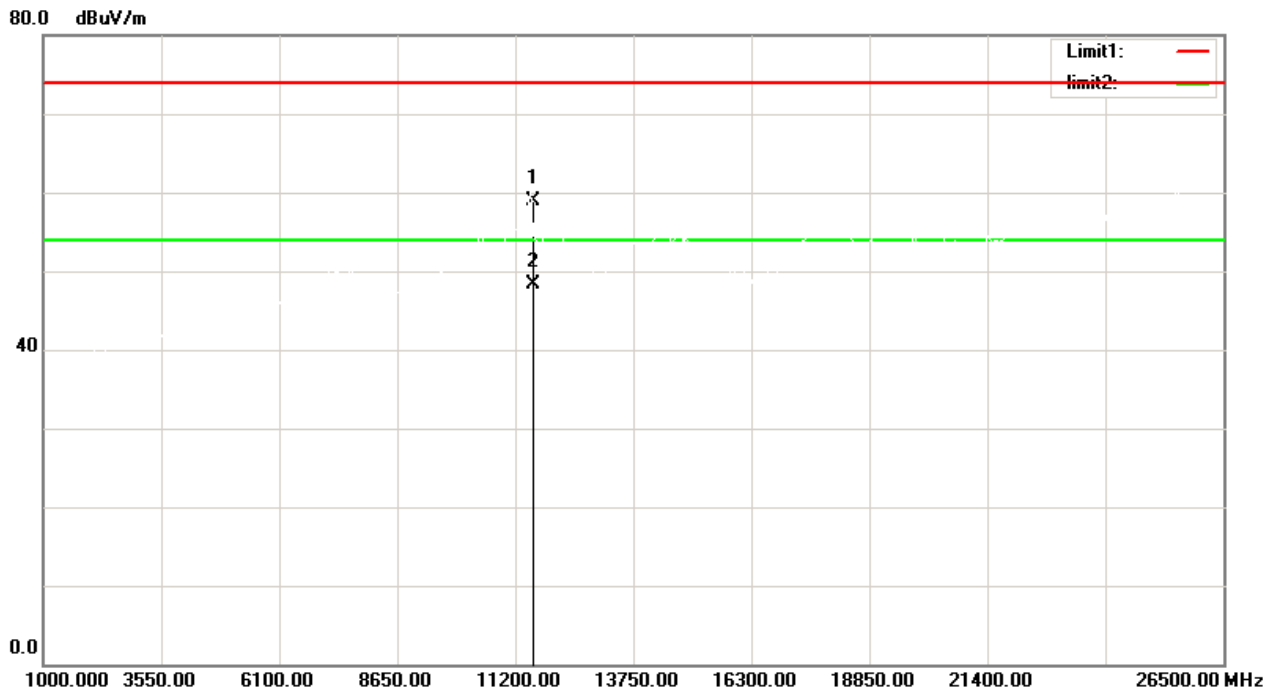

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree
1		11590.00	50.49	8.41	58.90	74.00	-15.10	peak	56
2	*	11590.00	39.95	8.41	48.36	54.00	-5.64	AVG	56


Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

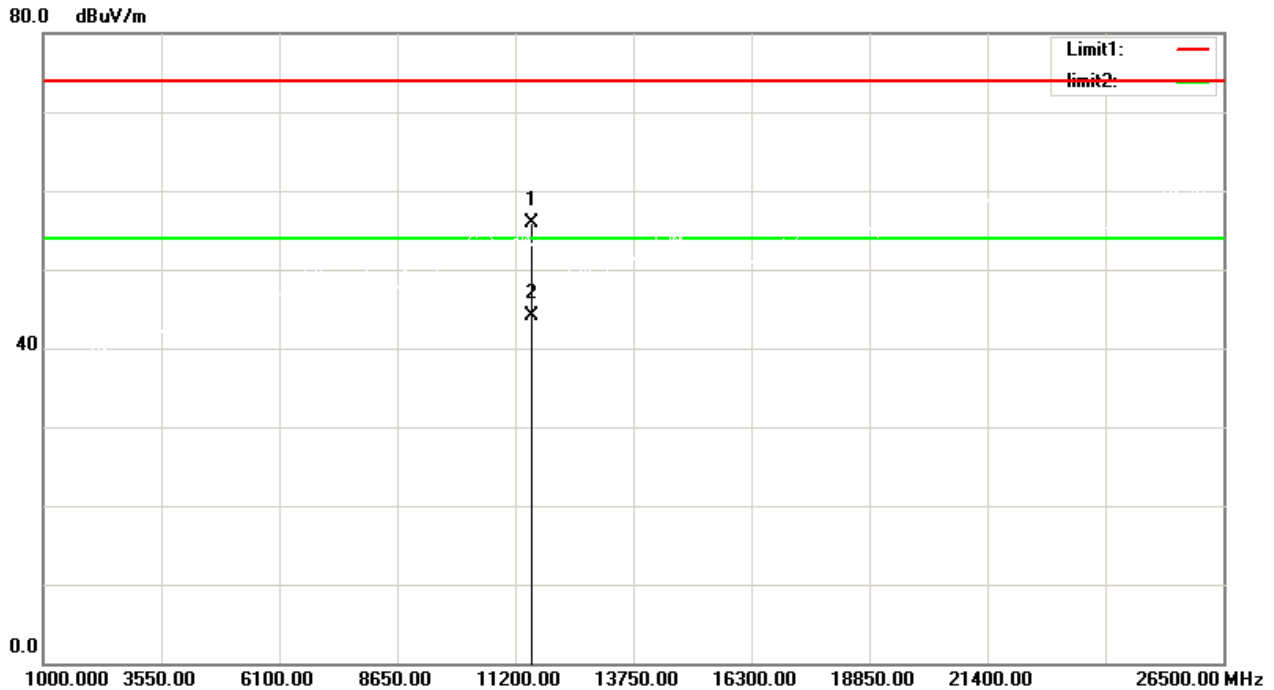

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11550.00	47.52	8.38	55.90	74.00	-18.10	peak	150	74
2	*	11550.00	35.79	8.38	44.17	54.00	-9.83	AVG	150	74


Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

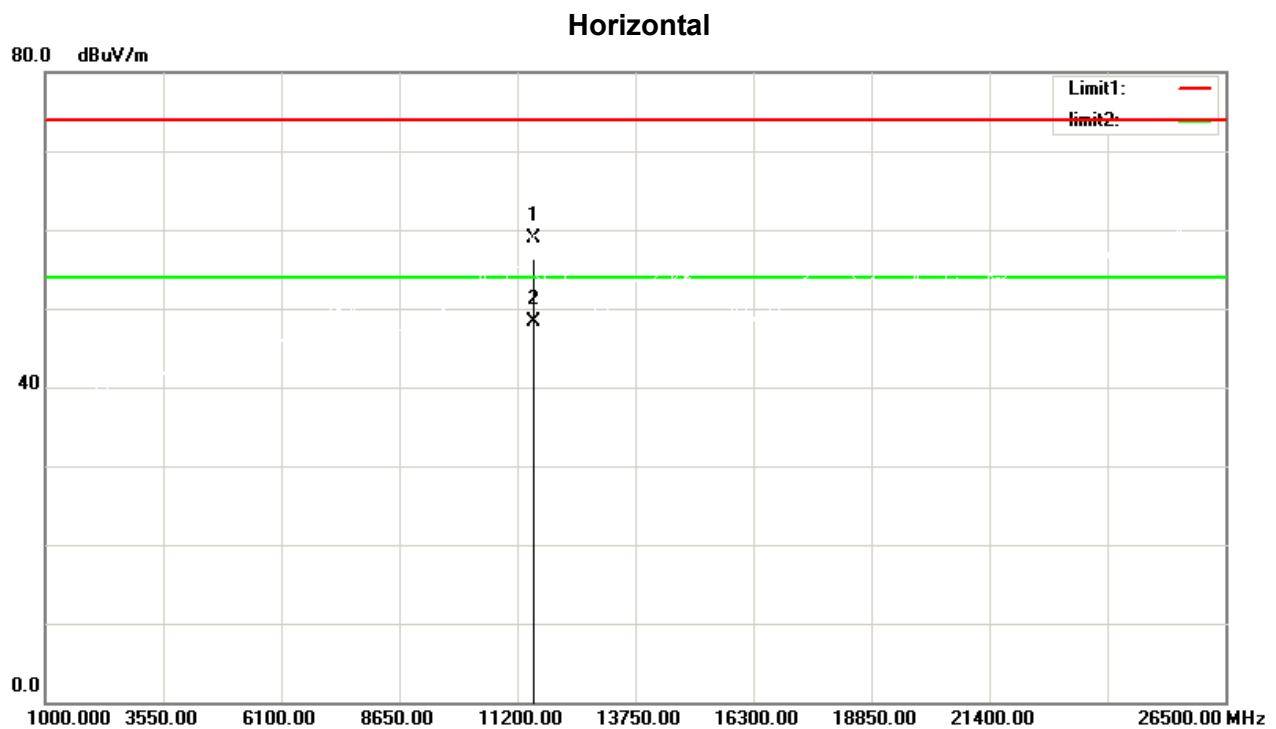

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11550.00	50.58	8.38	58.96	74.00	-15.04	peak	150	39
2	*	11550.00	39.98	8.38	48.36	54.00	-5.64	AVG	150	39


Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5180 MHz

Vertical

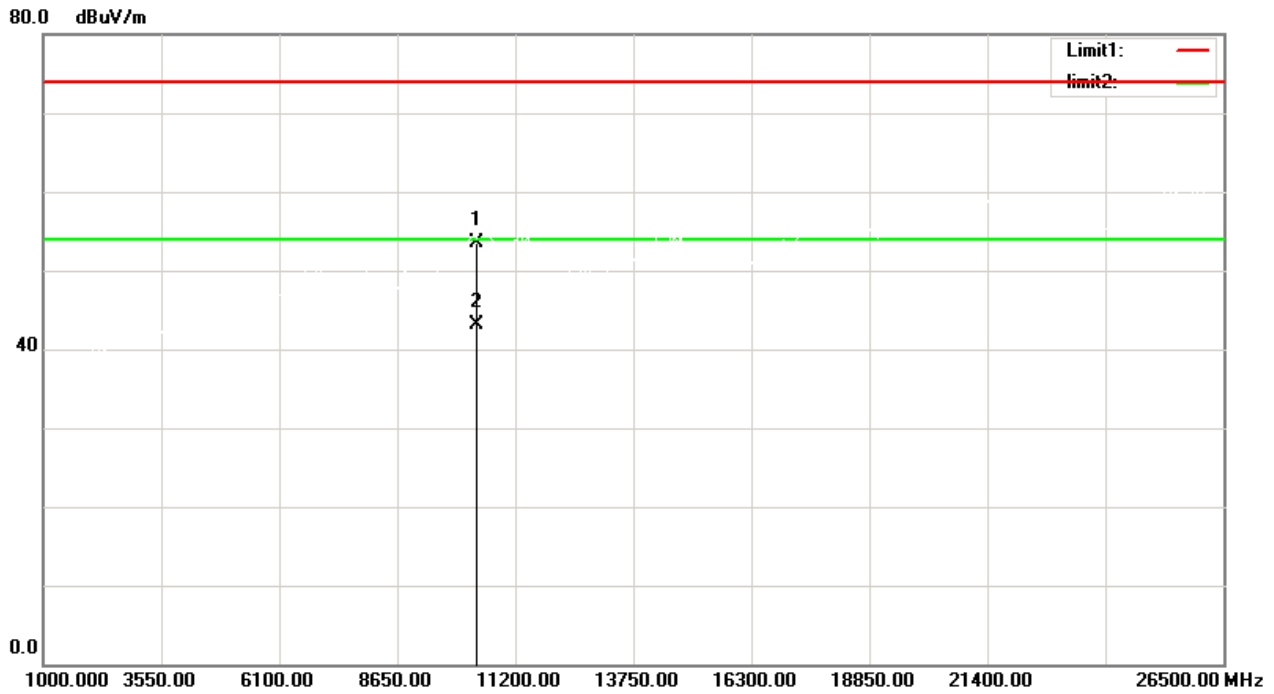

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10360.00	45.72	7.86	53.58	74.00	-20.42	peak	150	79	
2	*	10360.00	35.34	7.86	43.20	54.00	-10.80	AVG	150	79	


Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5180 MHz

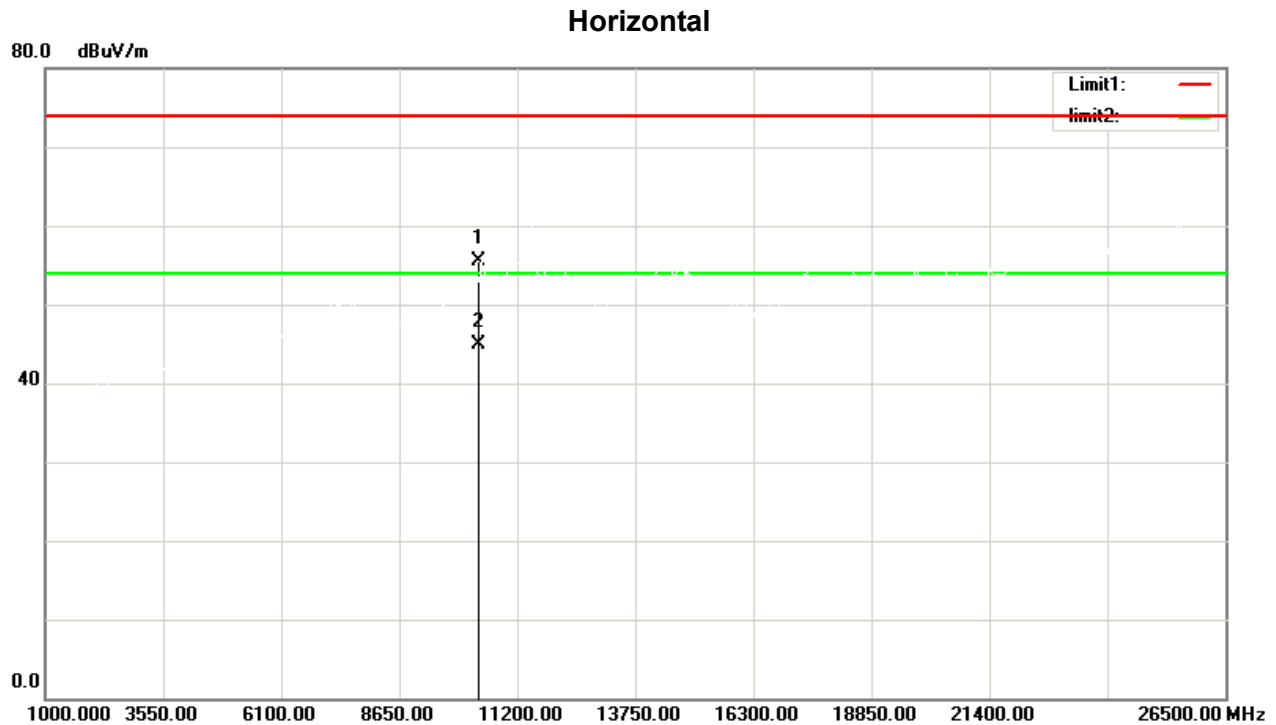

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10360.00	47.55	7.86	55.41	74.00	-18.59	peak	150	43
2	*	10360.00	37.04	7.86	44.90	54.00	-9.10	AVG	150	43

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5200 MHz


Vertical

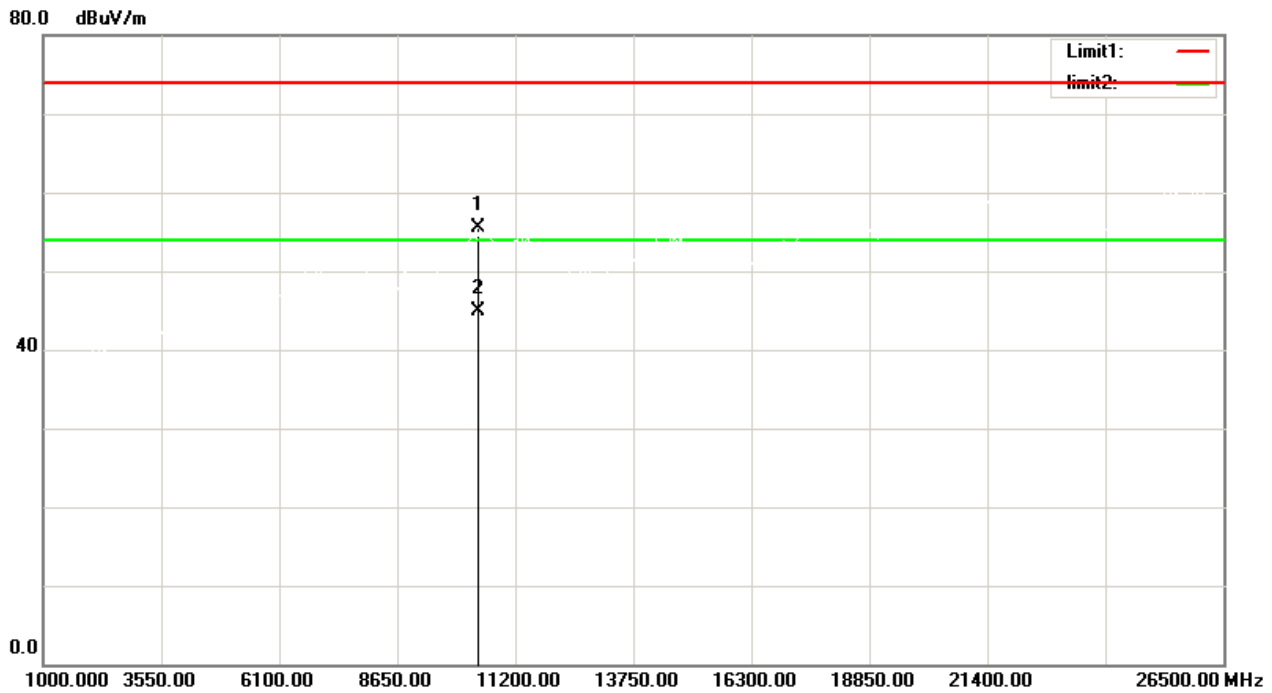

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10400.00	47.56	8.04	55.60	74.00	-18.40	peak	150	73
2	*	10400.00	36.86	8.04	44.90	54.00	-9.10	AVG	150	73

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5200 MHz


Horizontal

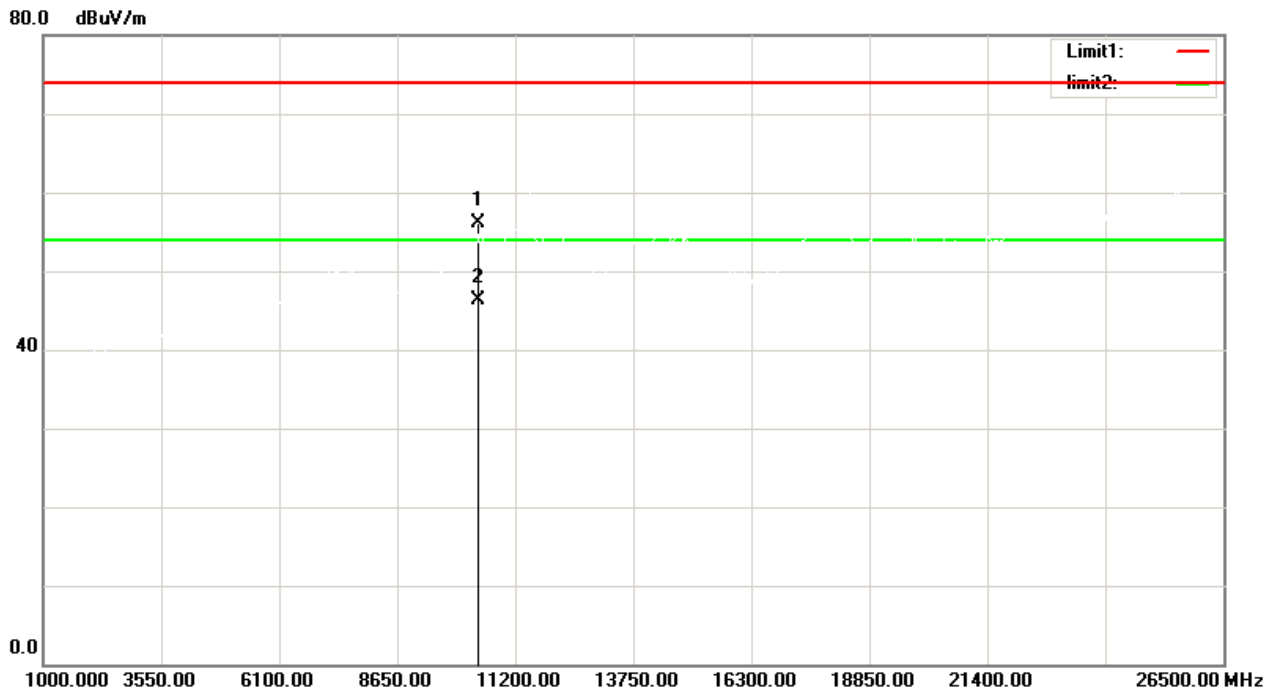

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10400.00	48.06	8.04	56.10	74.00	-17.90	peak	150	46
2	*	10400.00	38.28	8.04	46.32	54.00	-7.68	AVG	150	46

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5240 MHz


Vertical

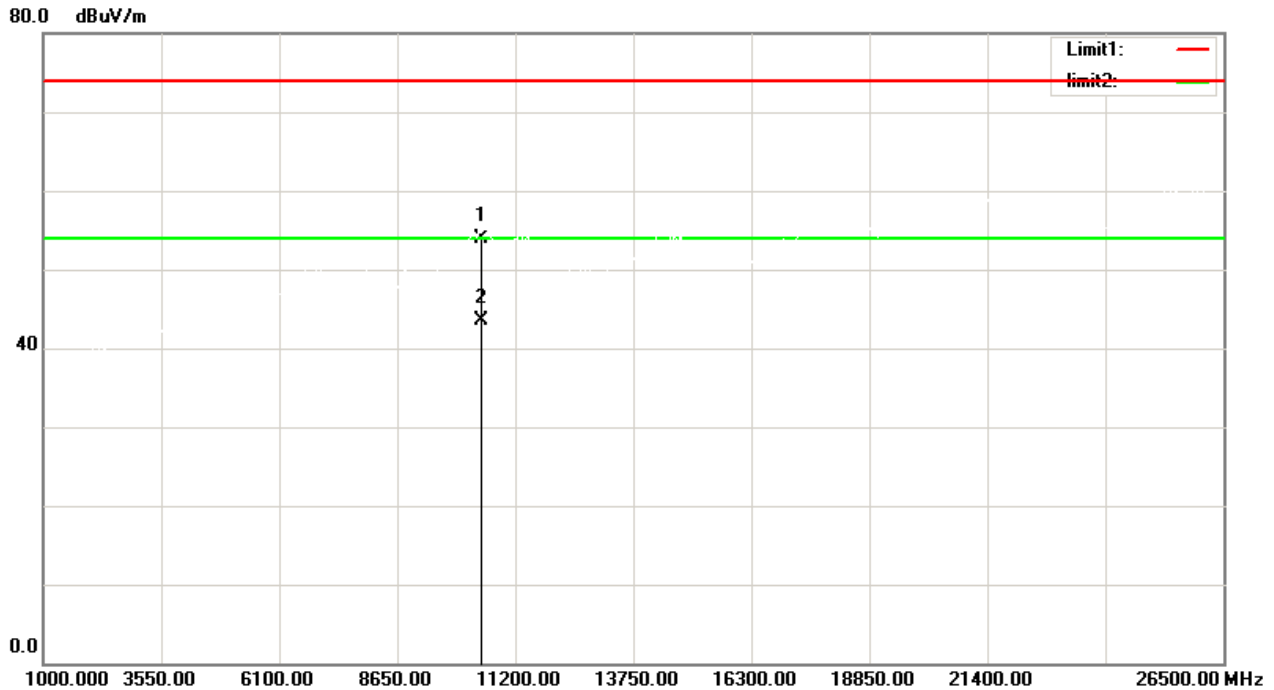

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10480.00	45.53	8.37	53.90	74.00	-20.10	peak	150	90
2	*	10480.00	35.15	8.37	43.52	54.00	-10.48	AVG	150	90

Report No.: 24EFSS04089 03661


Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE20) Mode 5240 MHz

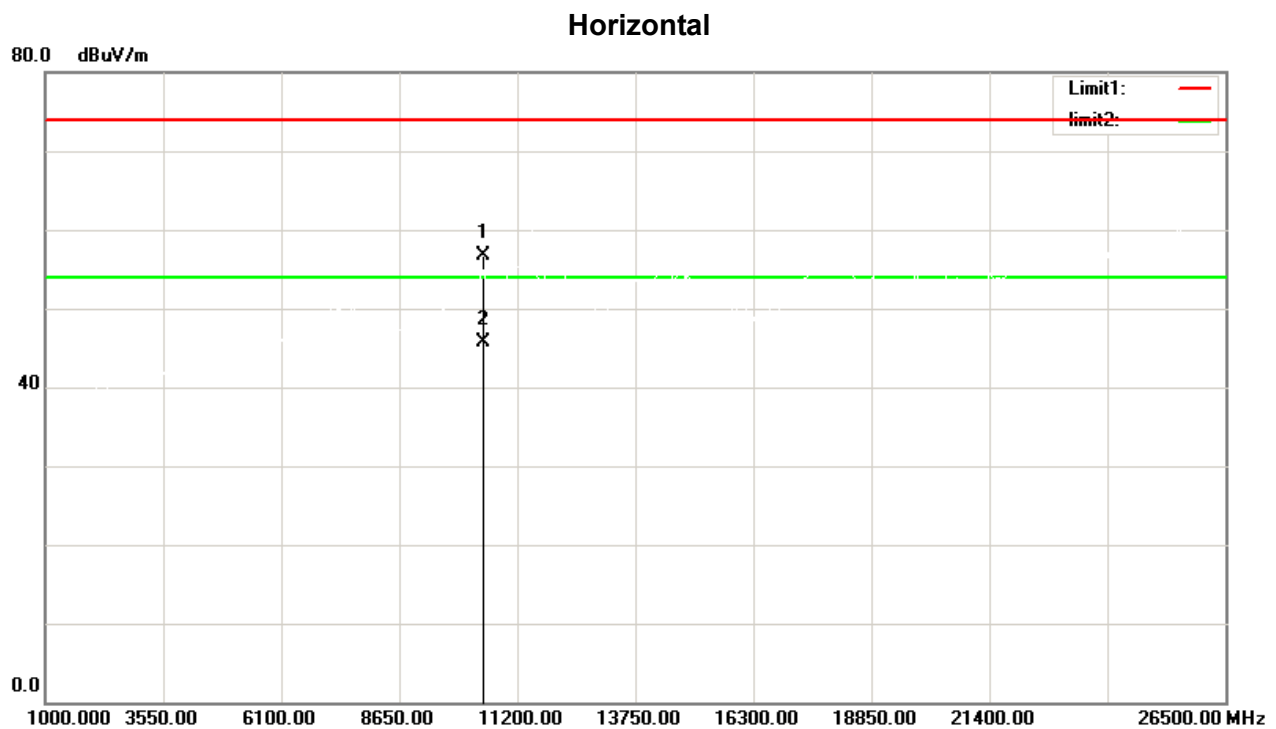

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10480.00	48.42	8.37	56.79	74.00	-17.21	peak	150	49
2	*	10480.00	37.39	8.37	45.76	54.00	-8.24	AVG	150	49

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE20) Mode 5260 MHz

Vertical

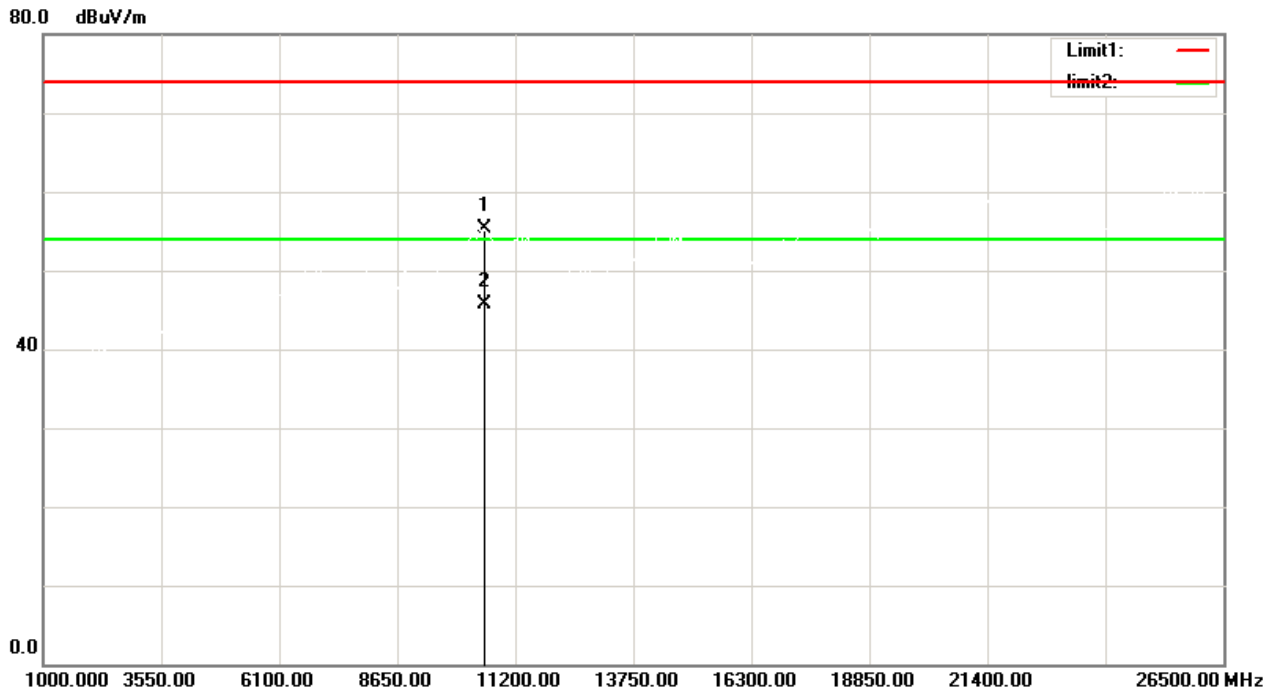


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10520.00	46.86	8.44	55.30	74.00	-18.70	peak	150	89	
2	*	10520.00	37.25	8.44	45.69	54.00	-8.31	AVG	150	89	

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE20) Mode 5260 MHz

Horizontal


80.0 dBuV/m

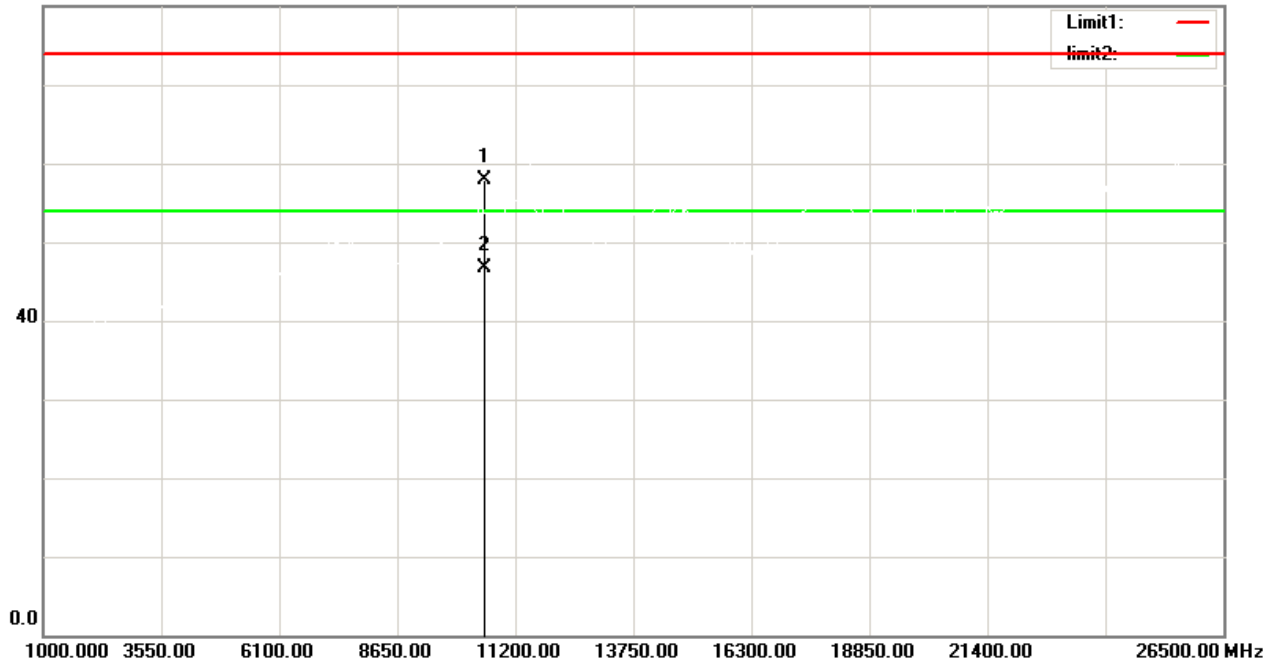

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10520.00	49.37	8.44	57.81	74.00	-16.19	peak	150	46
2	*	10520.00	38.35	8.44	46.79	54.00	-7.21	AVG	150	46


Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE20) Mode 5300 MHz

Vertical

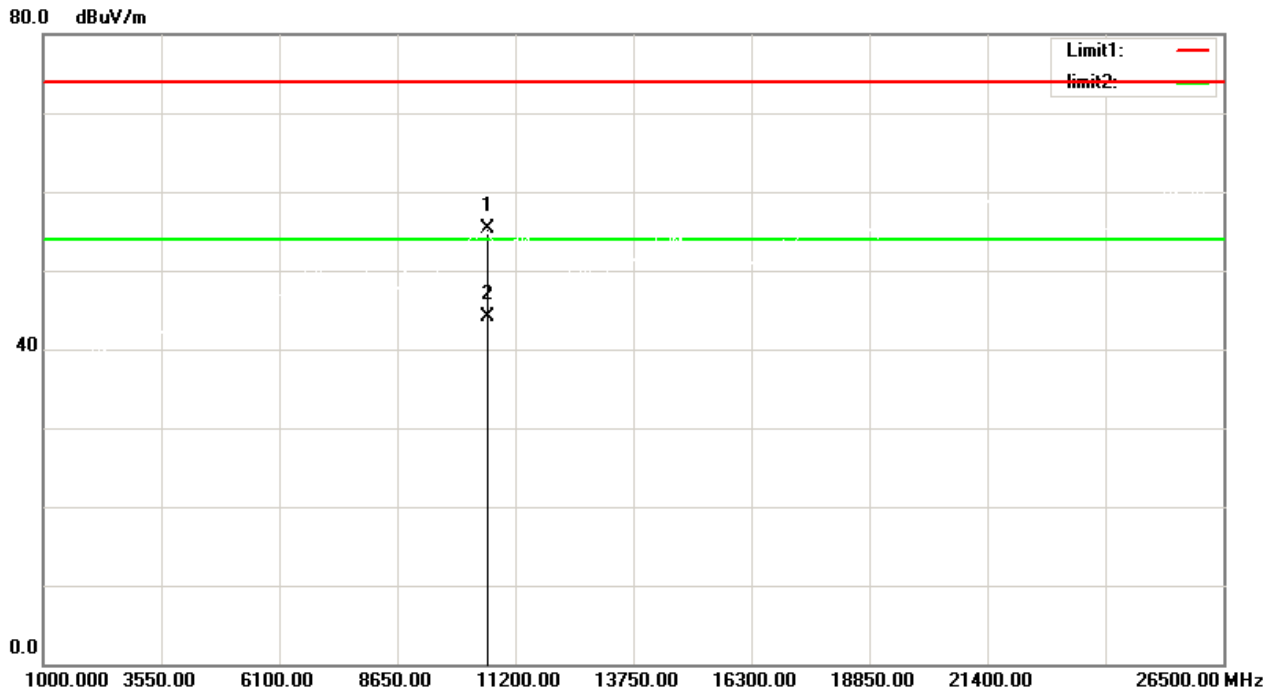

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10600.00	46.84	8.42	55.26	74.00	-18.74	peak	150	93
2	*	10600.00	35.66	8.42	44.08	54.00	-9.92	AVG	150	93

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE20) Mode 5300 MHz

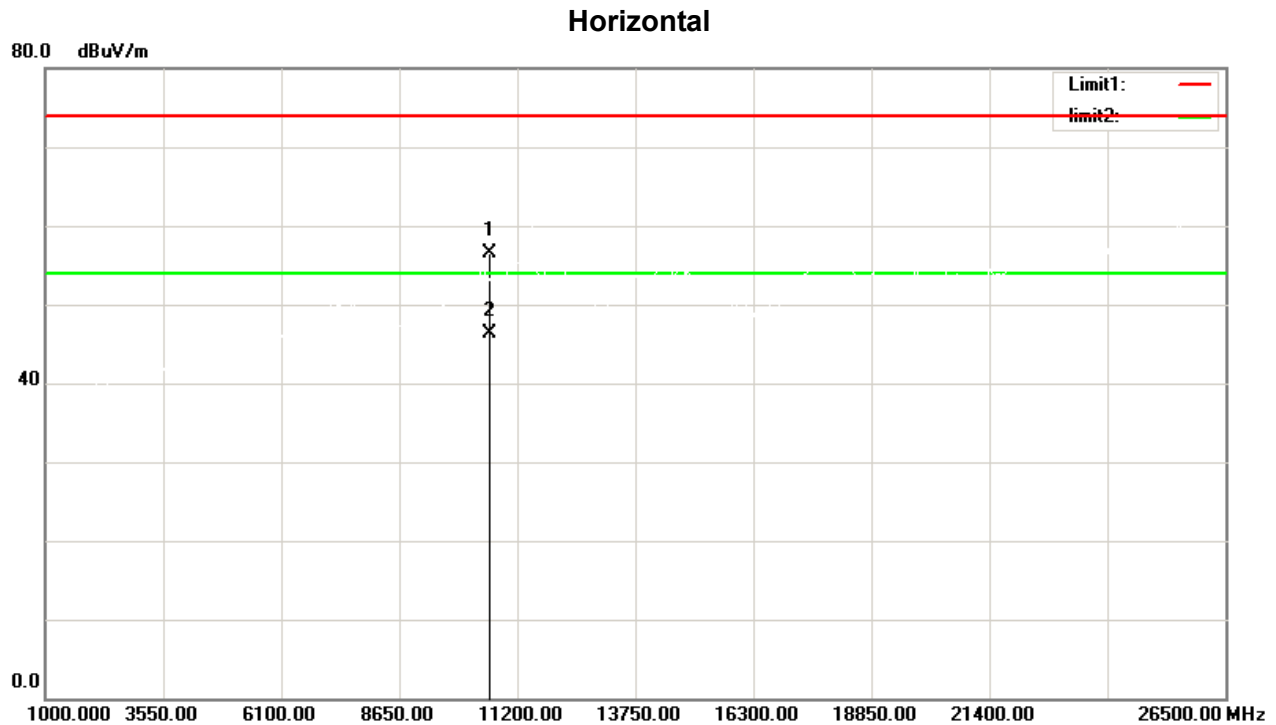


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10600.00	48.07	8.42	56.49	74.00	-17.51	peak	150	45
2	*	10600.00	37.97	8.42	46.39	54.00	-7.61	AVG	150	45

Report No.: 24EFSS04089 03661


Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE20) Mode 5320 MHz

Vertical

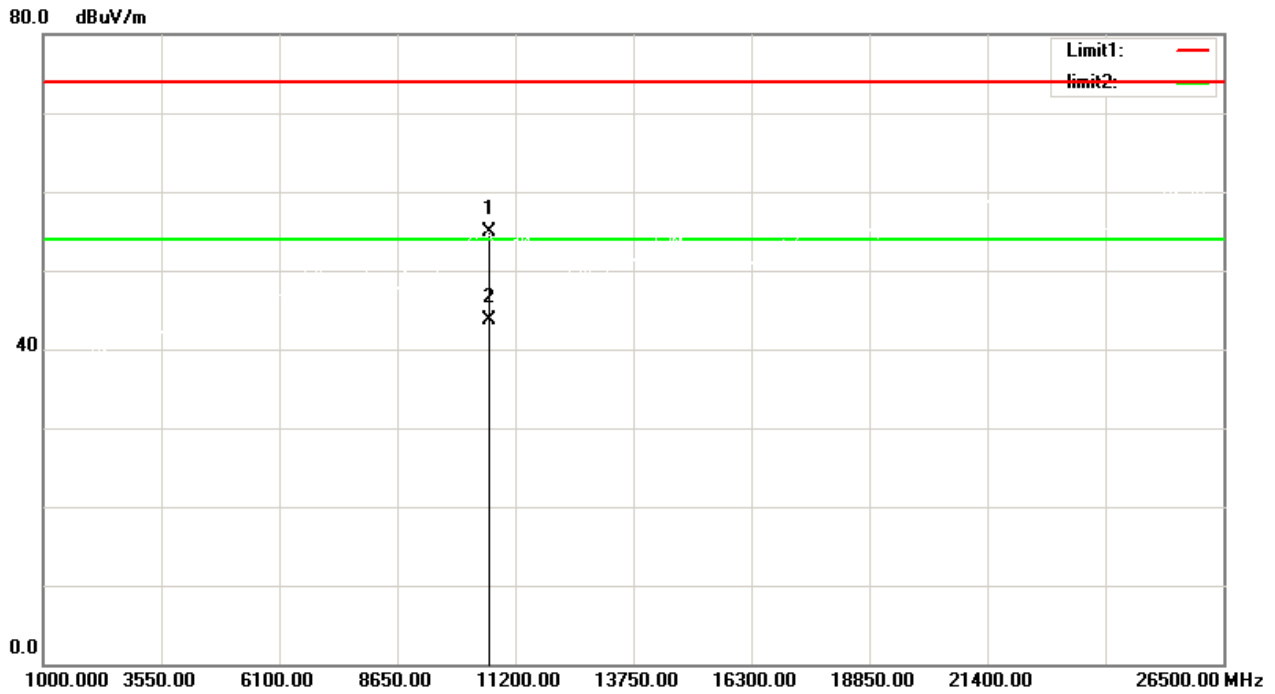

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10640.00	46.44	8.42	54.86	74.00	-19.14	peak	150	93
2	*	10640.00	35.20	8.42	43.62	54.00	-10.38	AVG	150	93

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE20) Mode 5320 MHz

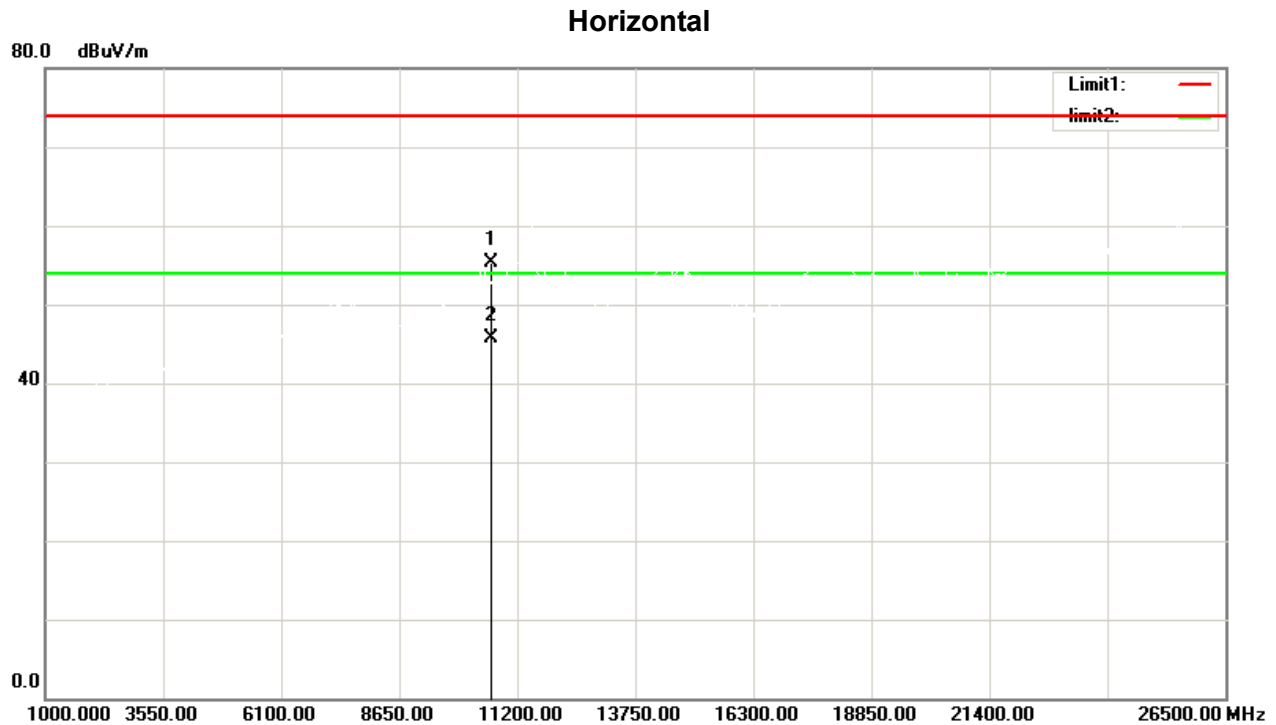


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10640.00	46.94	8.42	55.36	74.00	-18.64	peak	150	51
2	*	10640.00	37.21	8.42	45.63	54.00	-8.37	AVG	150	51

Report No.: 24EFSS04089 03661

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE20) Mode 5500 MHz

Vertical

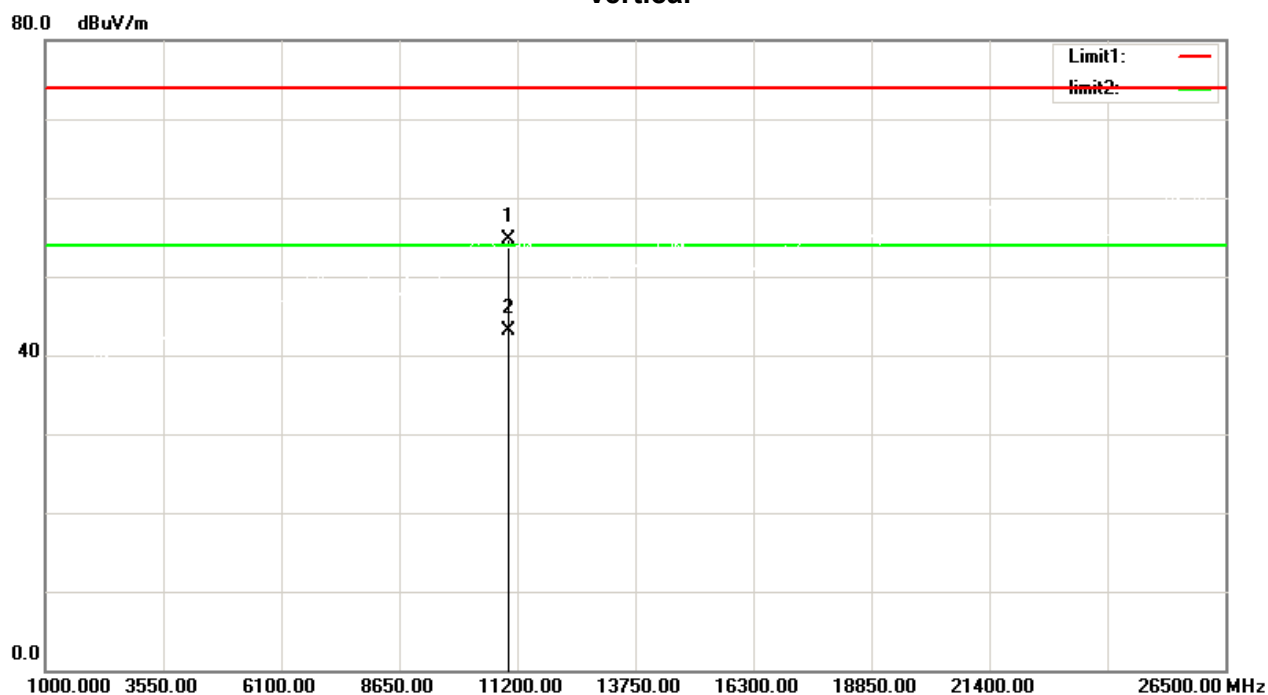


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11000.00	46.38	8.32	54.70	74.00	-19.30	peak	150	94
2	*	11000.00	34.80	8.32	43.12	54.00	-10.88	AVG	150	94

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE20) Mode 5500 MHz

Horizontal

80.0 dBuV/m

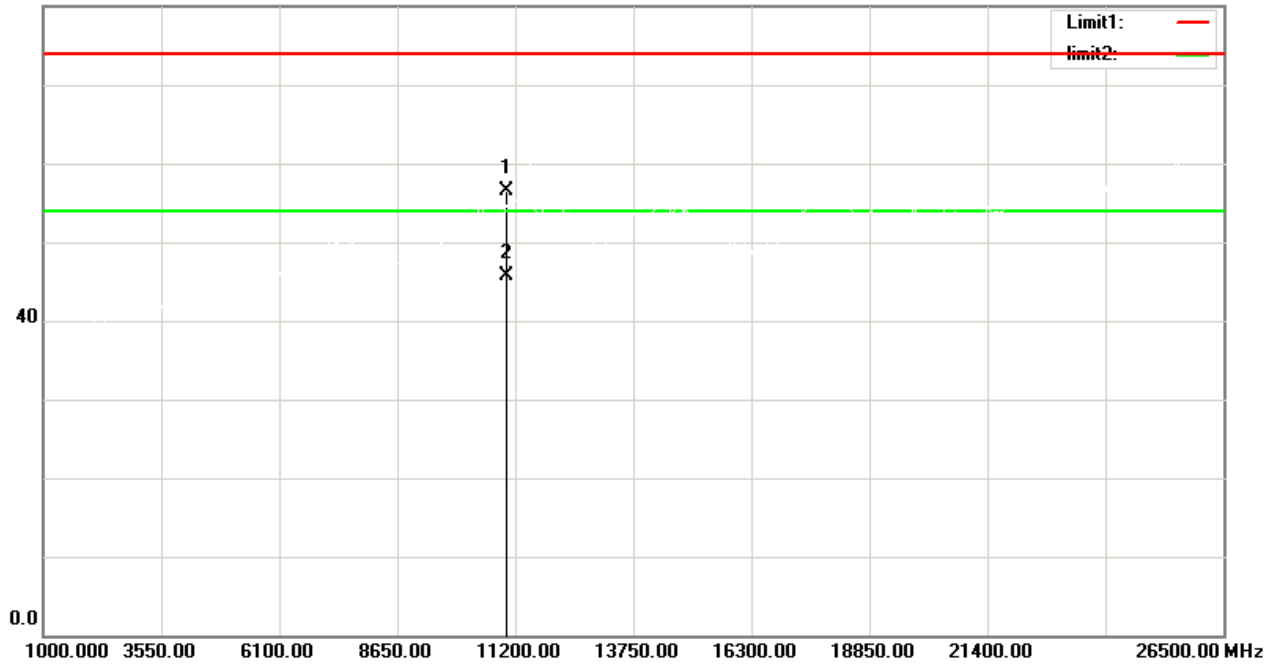


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11000.00	48.09	8.32	56.41	74.00	-17.59	peak	150	49
2	*	11000.00	37.38	8.32	45.70	54.00	-8.30	AVG	150	49

Report No.: 24EFSS04089 03661


Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE20) Mode 5600 MHz

Vertical

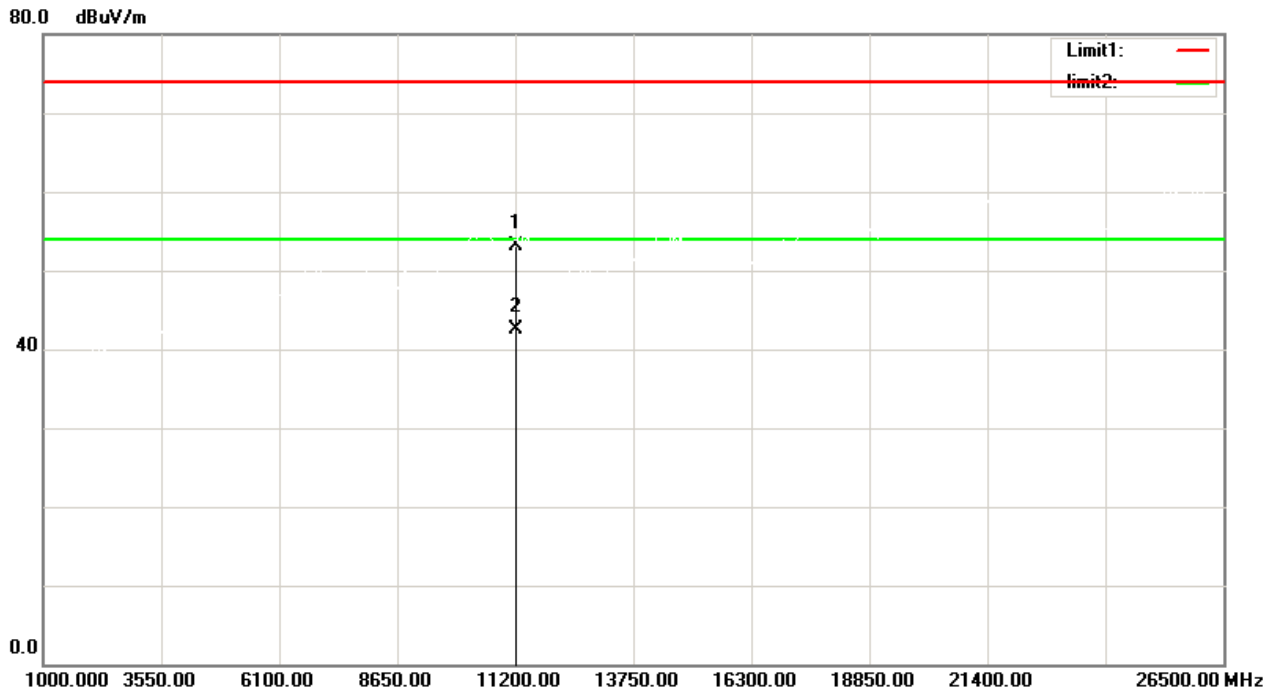

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11200.00	44.68	8.33	53.01	74.00	-20.99	peak	150	85
2	*	11200.00	34.21	8.33	42.54	54.00	-11.46	AVG	150	85


Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE20) Mode 5600 MHz

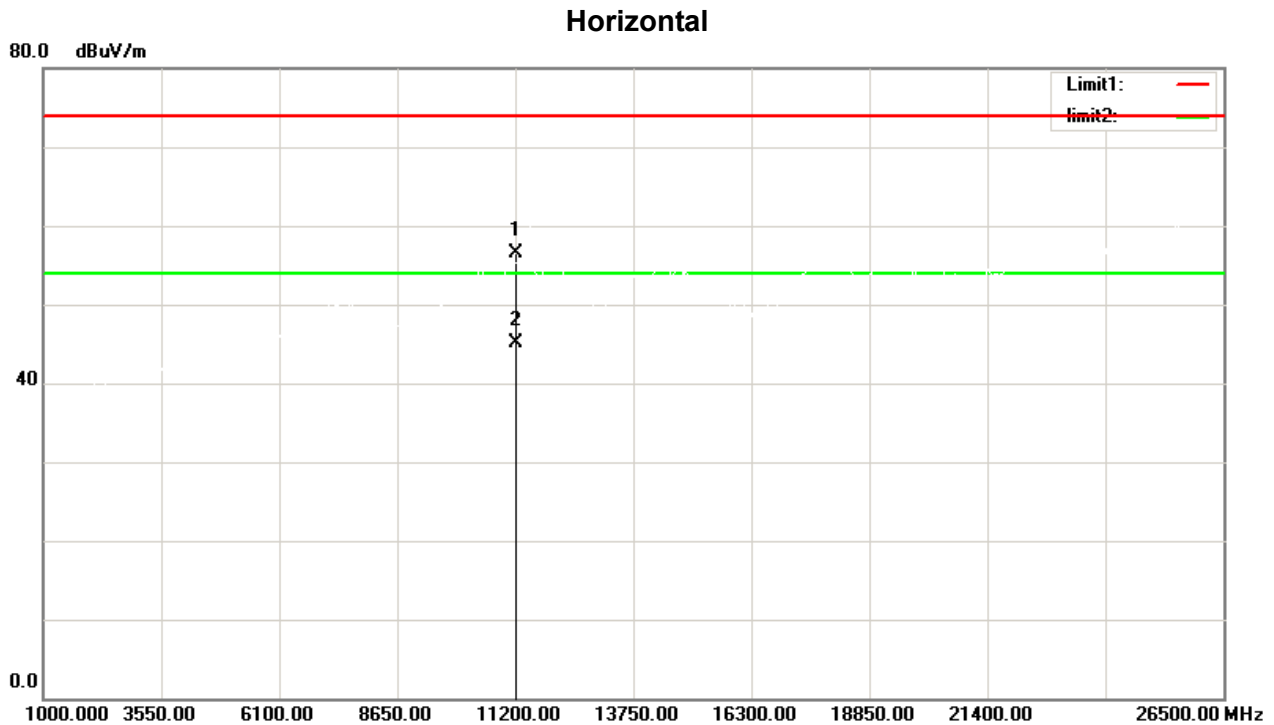

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree	Comment
1		11200.00	48.08	8.33	56.41	74.00	-17.59	peak	150	50
2	*	11200.00	36.69	8.33	45.02	54.00	-8.98	AVG	150	50

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE20) Mode 5700 MHz


Vertical

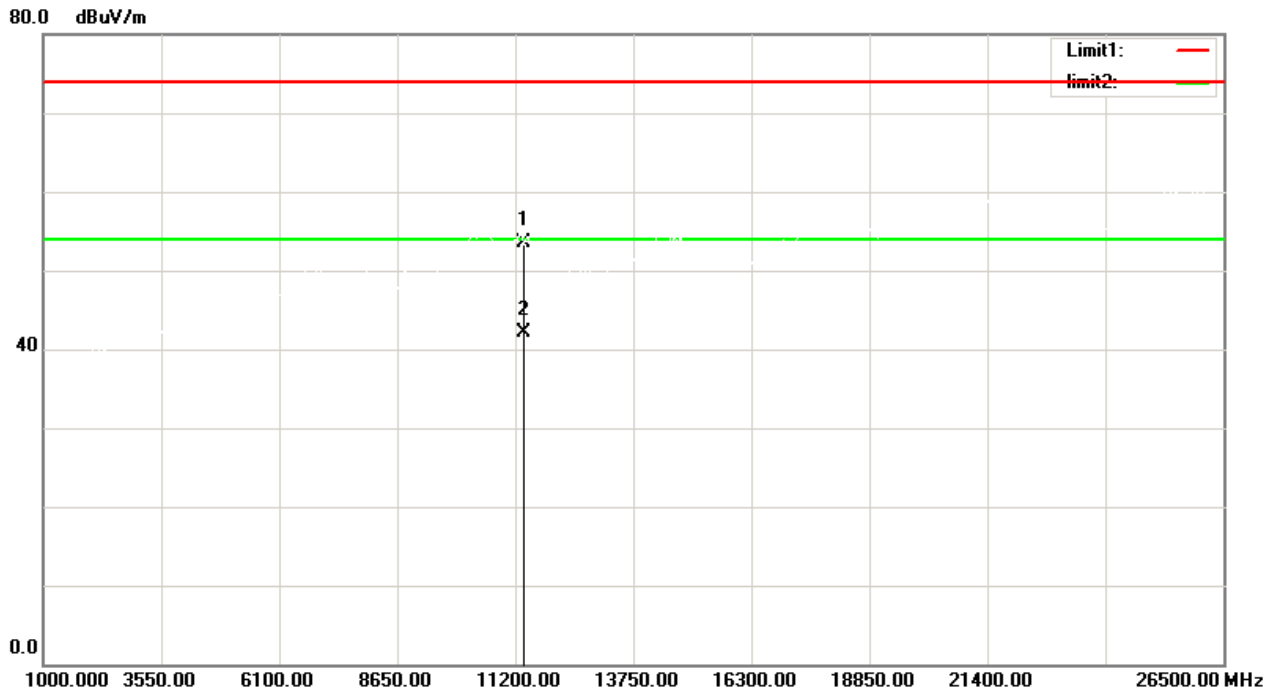

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11400.00	45.07	8.34	53.41	74.00	-20.59	peak	150	96
2	*	11400.00	33.76	8.34	42.10	54.00	-11.90	AVG	150	96

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE20) Mode 5700 MHz


Horizontal

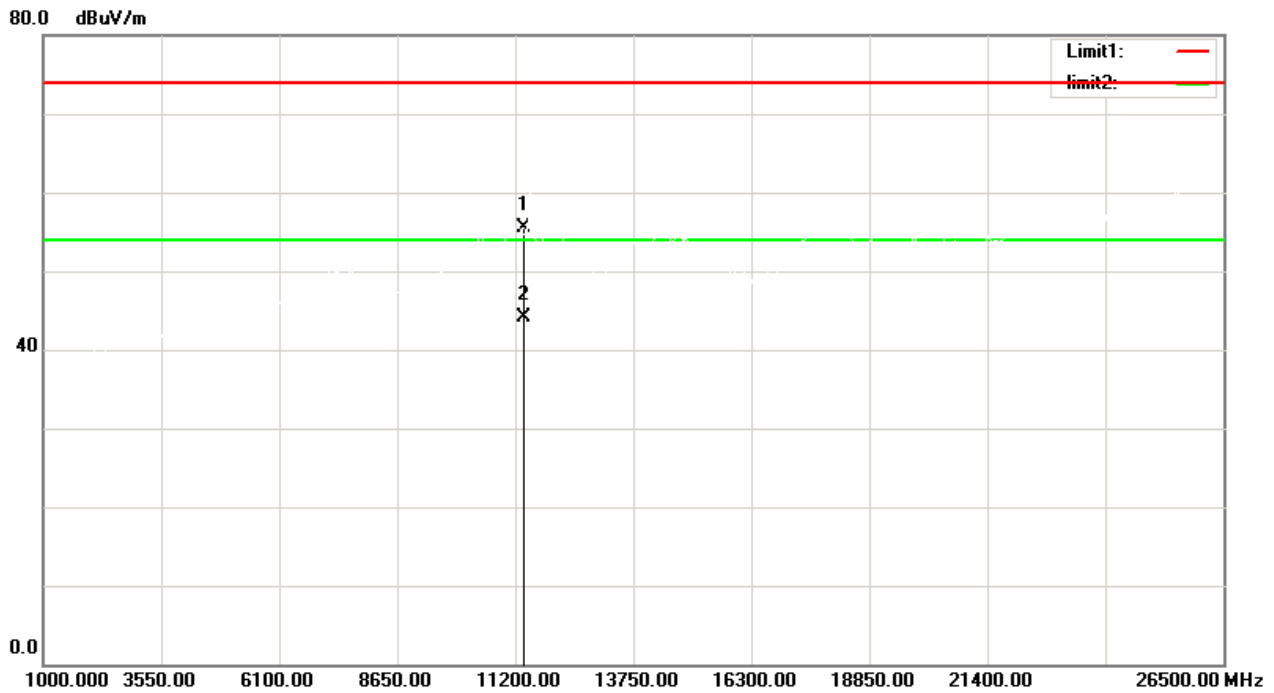

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11400.00	47.15	8.34	55.49	74.00	-18.51	peak	150	39
2	*	11400.00	35.83	8.34	44.17	54.00	-9.83	AVG	150	39


Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5190 MHz

Vertical

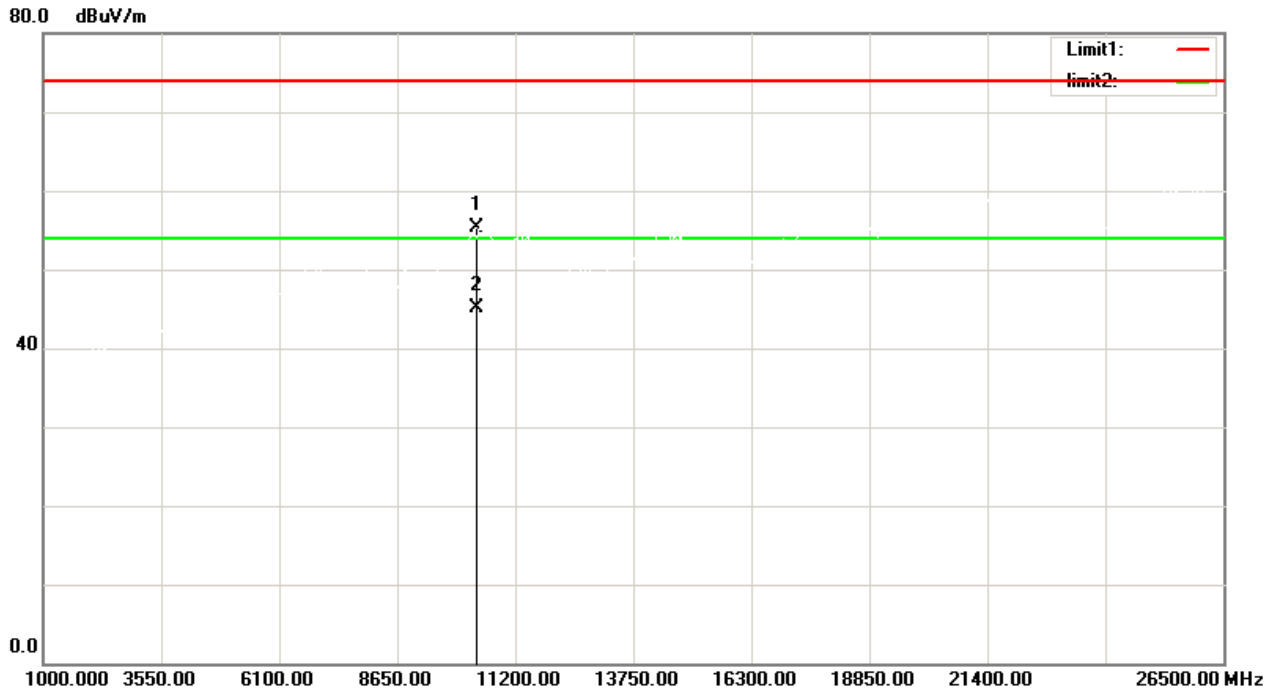

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10380.00	47.40	7.96	55.36	74.00	-18.64	peak	150	76
2	*	10380.00	37.13	7.96	45.09	54.00	-8.91	AVG	150	76

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5190 MHz

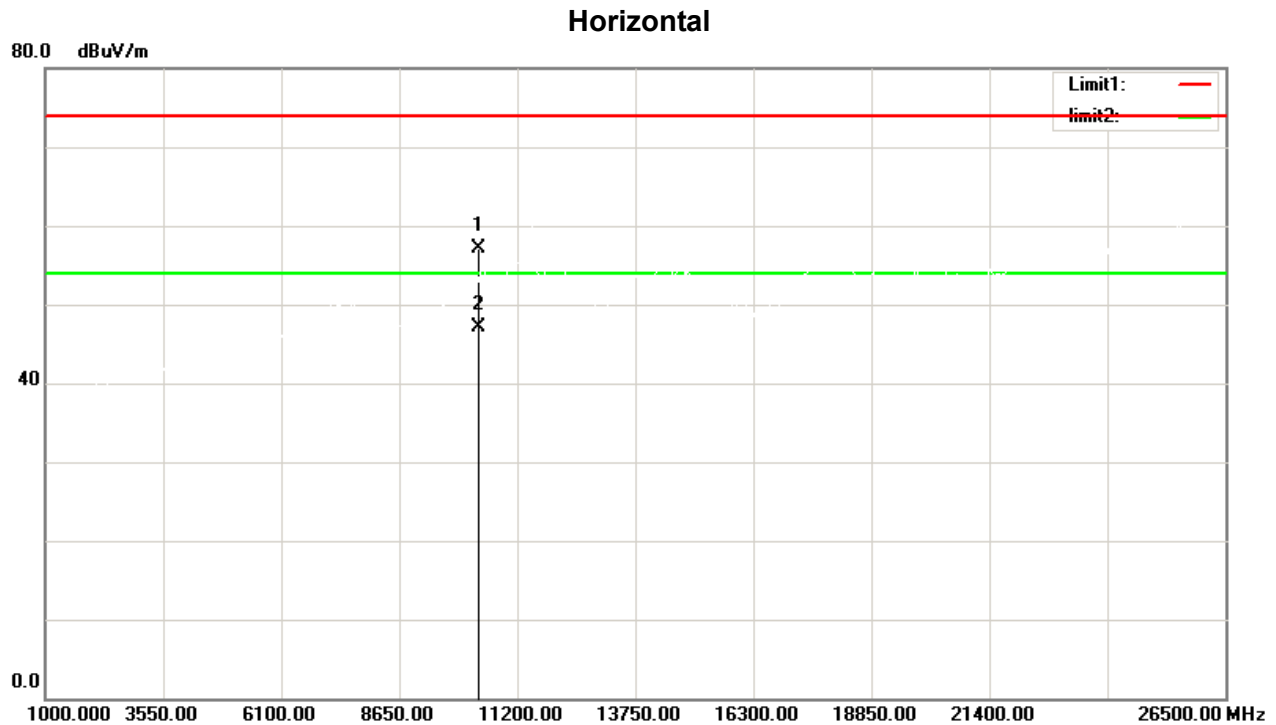


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10380.00	49.14	7.96	57.10	74.00	-16.90	peak	150	34
2	*	10380.00	39.15	7.96	47.11	54.00	-6.89	AVG	150	34

Report No.: 24EFSS04089 03661

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5230 MHz

Vertical


80.0 dBuV/m

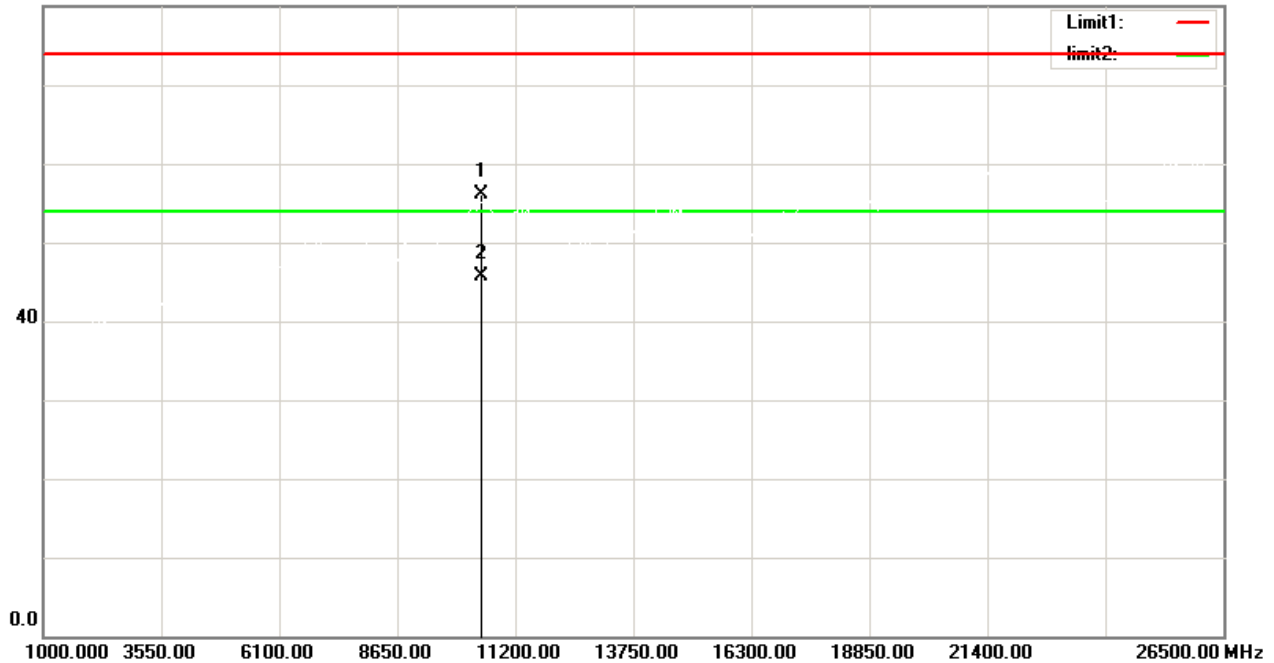

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10460.00	47.91	8.28	56.19	74.00	-17.81	peak	150	88	
2	*	10460.00	37.44	8.28	45.72	54.00	-8.28	AVG	150	88	

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE40) Mode 5230 MHz

Horizontal

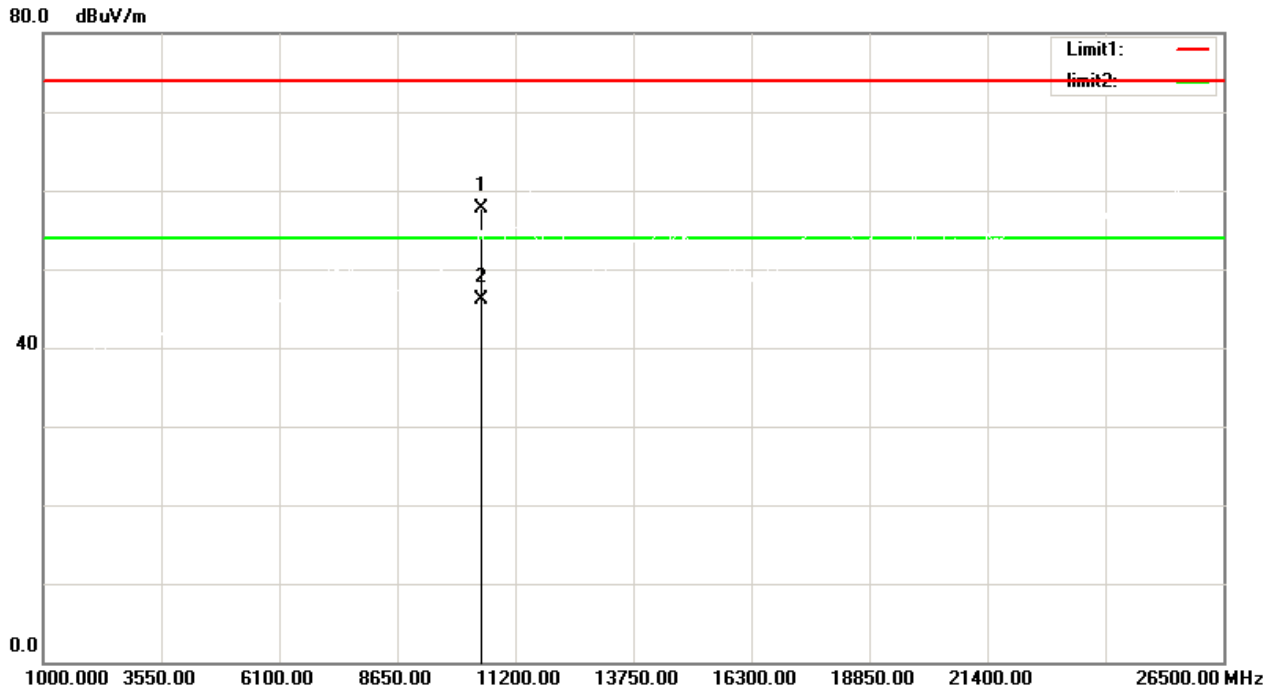


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10460.00	49.52	8.28	57.80	74.00	-16.20	peak	150	31
2	*	10460.00	37.92	8.28	46.20	54.00	-7.80	AVG	150	31

Report No.: 24EFSS04089 03661


Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE40) Mode 5270 MHz

Vertical

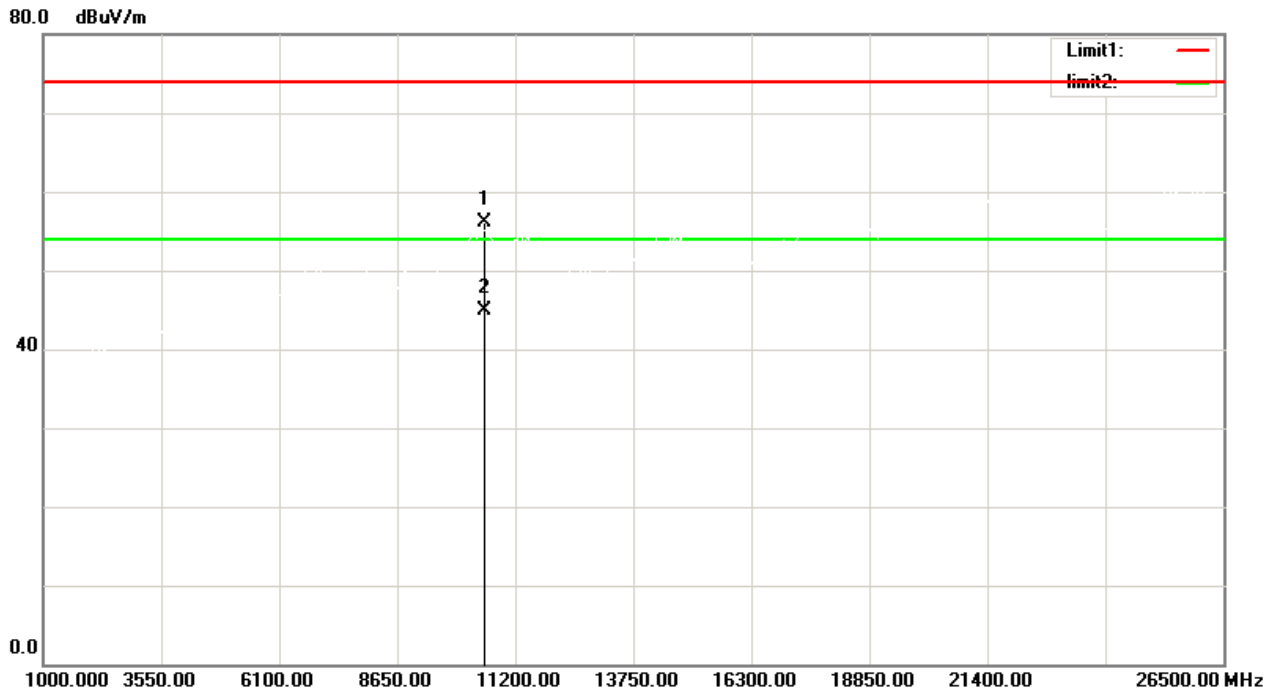

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10540.00	47.66	8.44	56.10	74.00	-17.90	peak	150	76
2	*	10540.00	36.56	8.44	45.00	54.00	-9.00	AVG	150	76


Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE40) Mode 5270 MHz

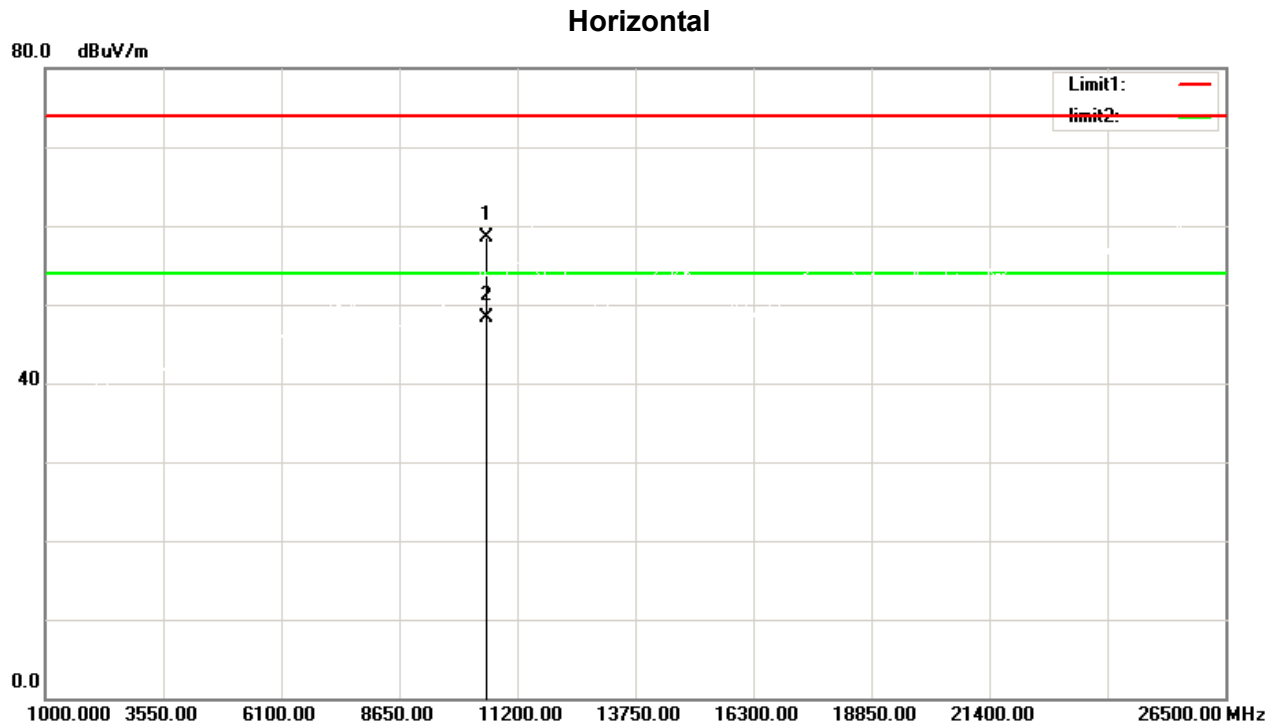

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10540.00	49.99	8.44	58.43	74.00	-15.57	peak	150	34	
2	*	10540.00	39.86	8.44	48.30	54.00	-5.70	AVG	150	34	

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE40) Mode 5310 MHz

Vertical

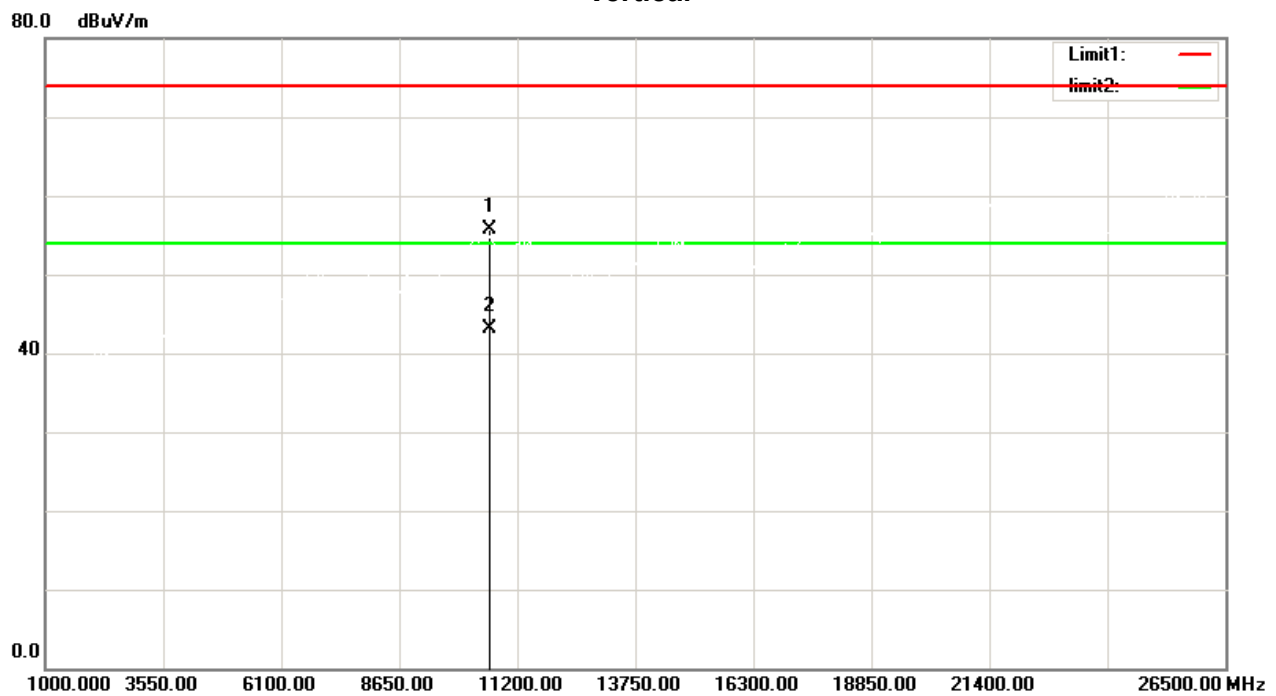


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		10620.00	47.38	8.41	55.79	74.00	-18.21	peak	150	97
2	*	10620.00	34.74	8.41	43.15	54.00	-10.85	AVG	150	97

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE40) Mode 5310 MHz


Horizontal

80.0 dBuV/m

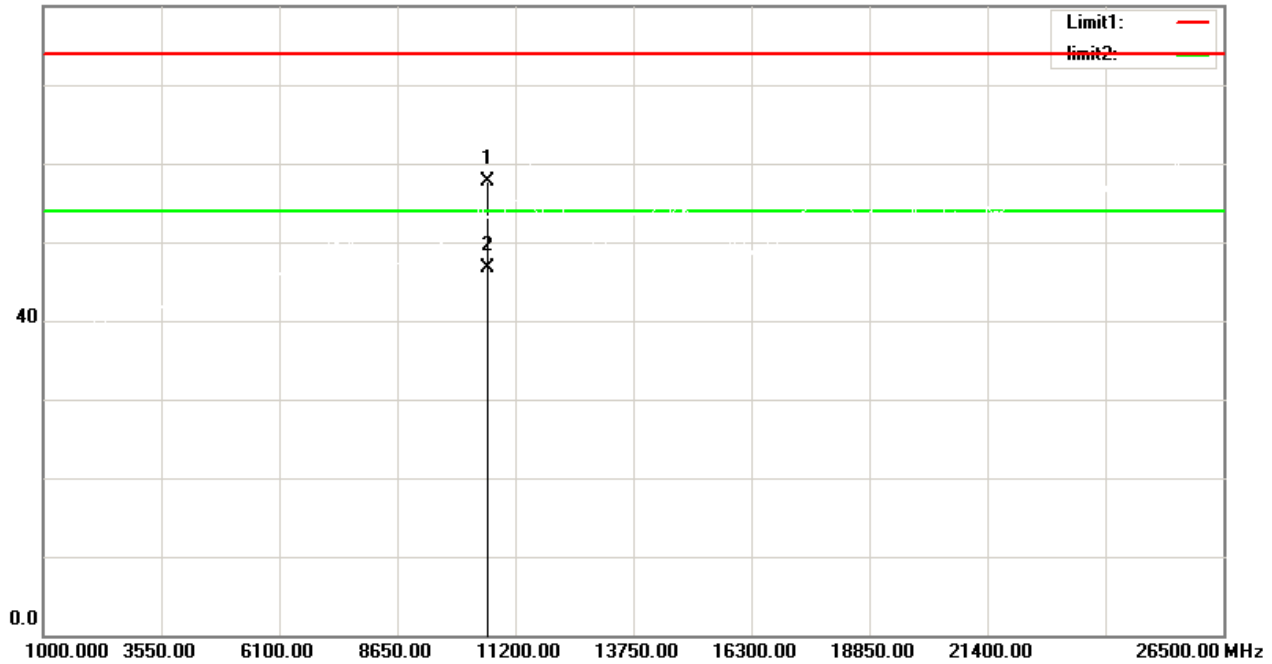

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10620.00	49.25	8.41	57.66	74.00	-16.34	peak	150	46
2	*	10620.00	38.35	8.41	46.76	54.00	-7.24	AVG	150	46

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE40) Mode 5510 MHz

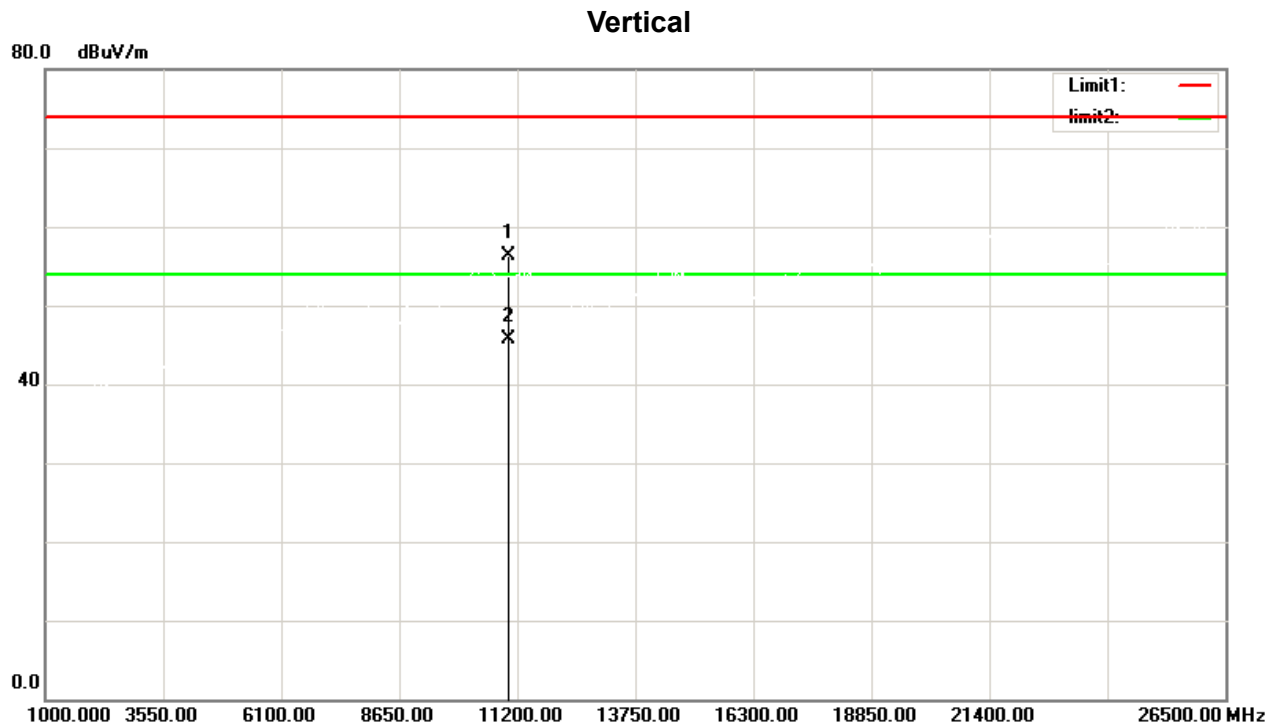


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11020.00	48.01	8.33	56.34	74.00	-17.66	peak	150	96
2	*	11020.00	37.46	8.33	45.79	54.00	-8.21	AVG	150	96

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE40) Mode 5510 MHz


Horizontal

80.0 dBuV/m

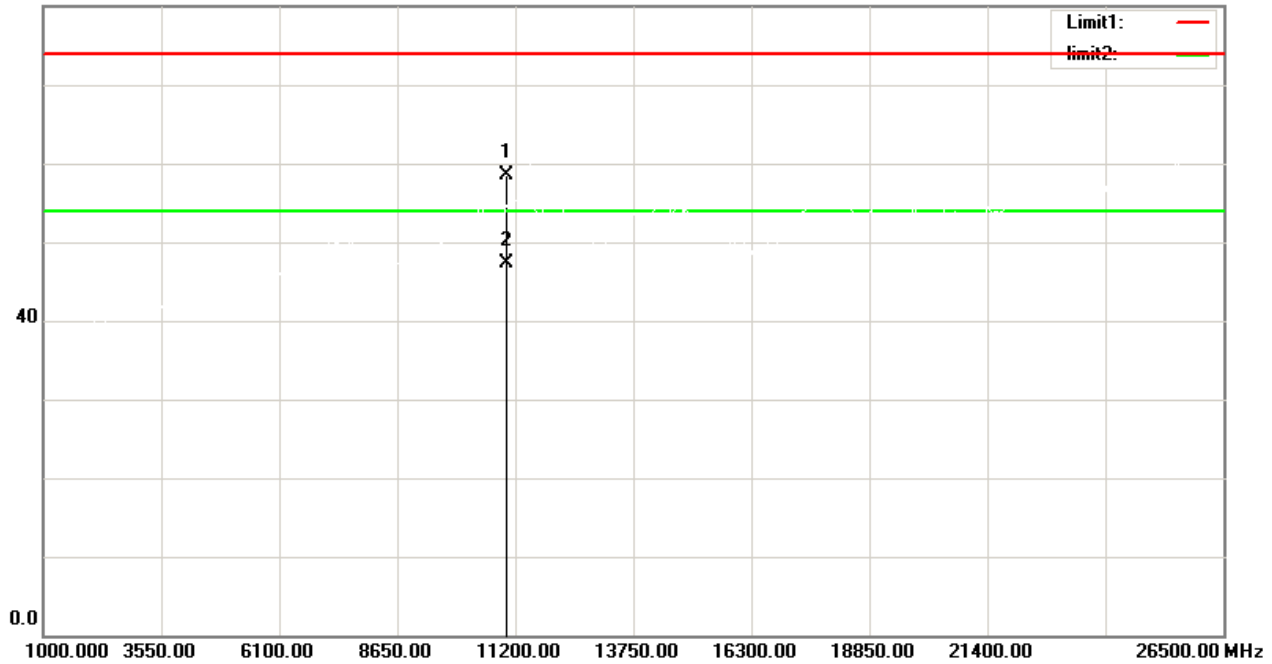


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1		11020.00	50.23	8.33	58.56	74.00	-15.44	peak	150	39
2	*	11020.00	38.88	8.33	47.21	54.00	-6.79	AVG	150	39

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE40) Mode 5590 MHz

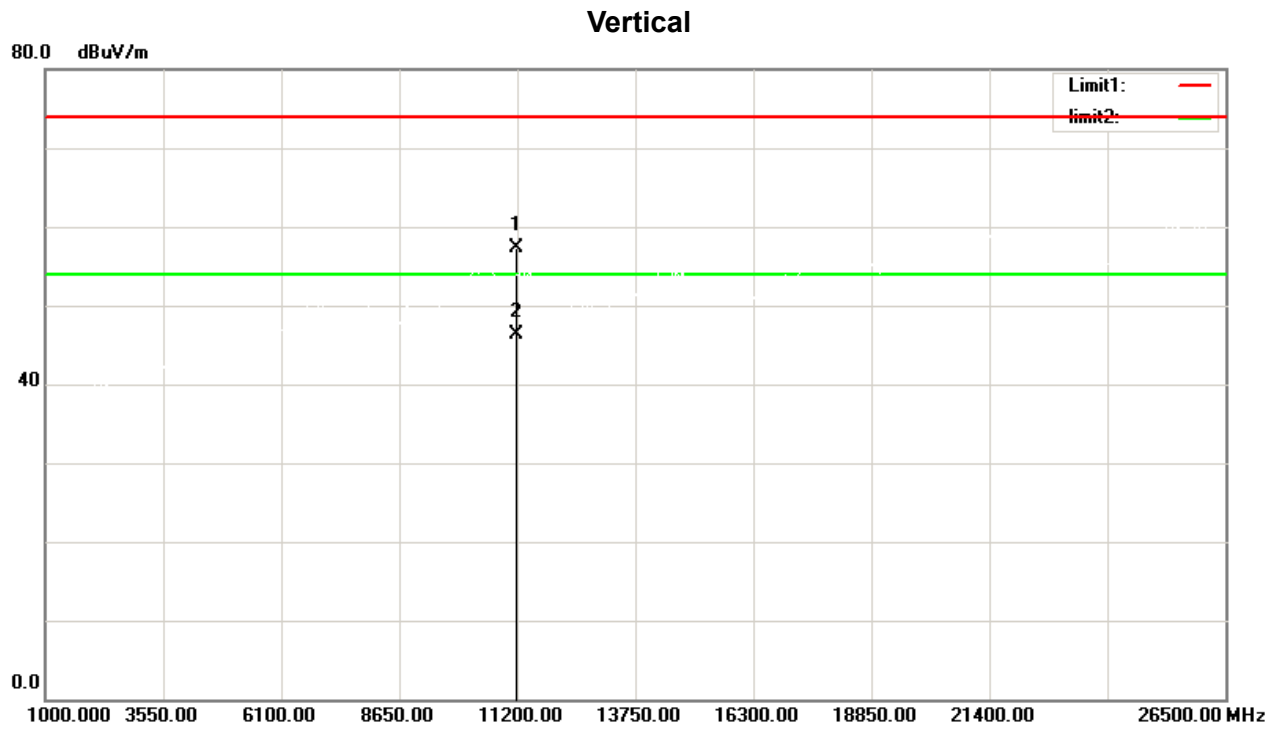

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11180.00	48.98	8.33	57.31	74.00	-16.69	peak	150	74	
2	*	11180.00	37.96	8.33	46.29	54.00	-7.71	AVG	150	74	


Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE40) Mode 5590 MHz

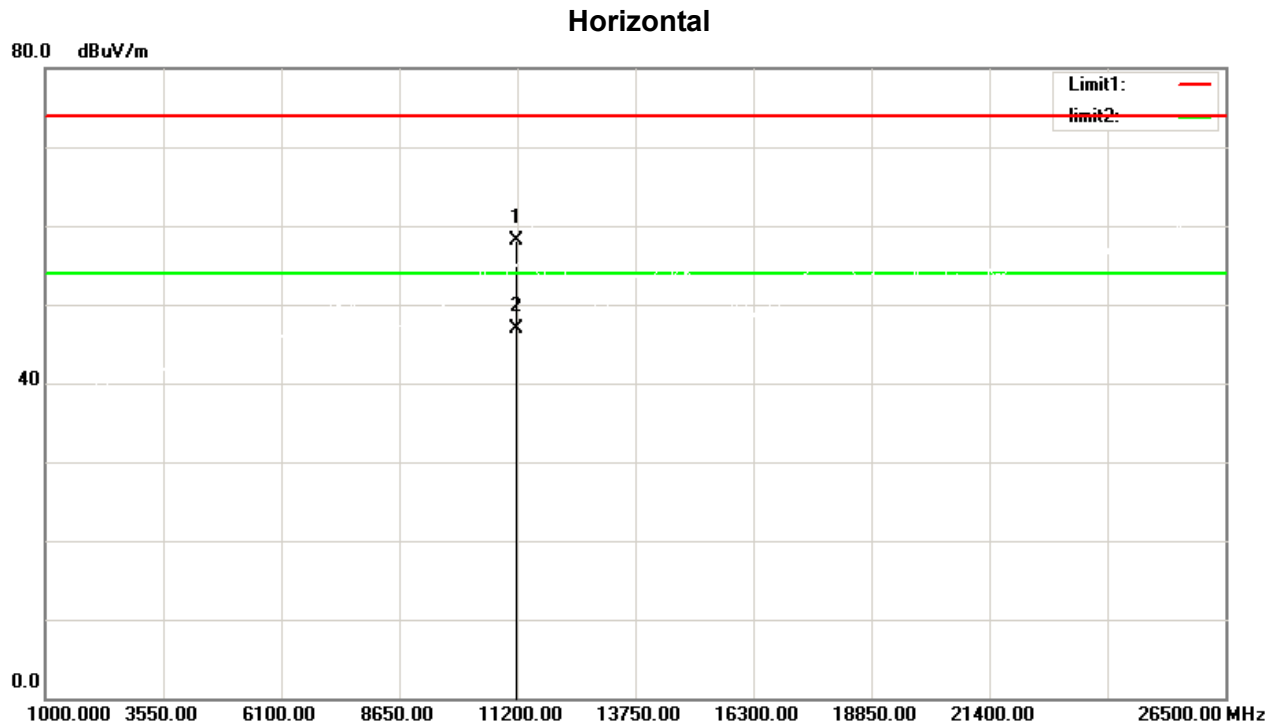

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11180.00	49.69	8.33	58.02	74.00	-15.98	peak	150	46
2	*	11180.00	38.57	8.33	46.90	54.00	-7.10	AVG	150	46

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE40) Mode 5670 MHz


Vertical

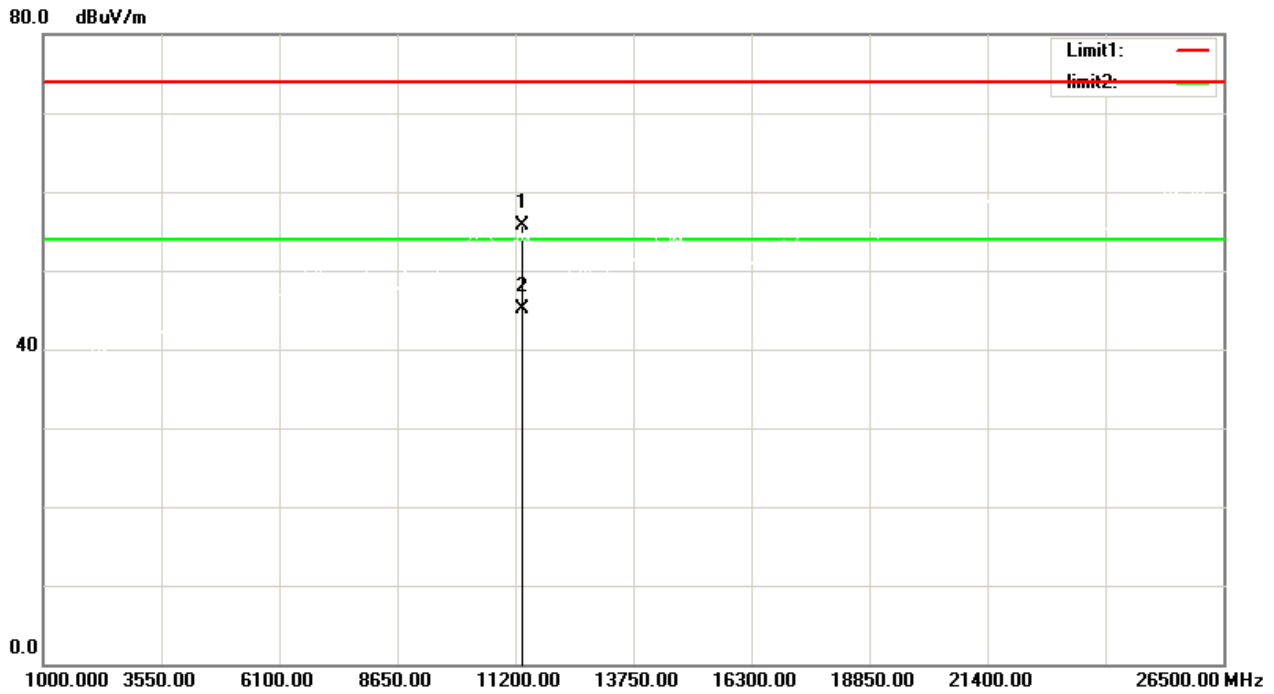

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11340.00	47.35	8.35	55.70	74.00	-18.30	peak	150	76
2	*	11340.00	36.70	8.35	45.05	54.00	-8.95	AVG	150	76

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE40) Mode 5670 MHz


Horizontal

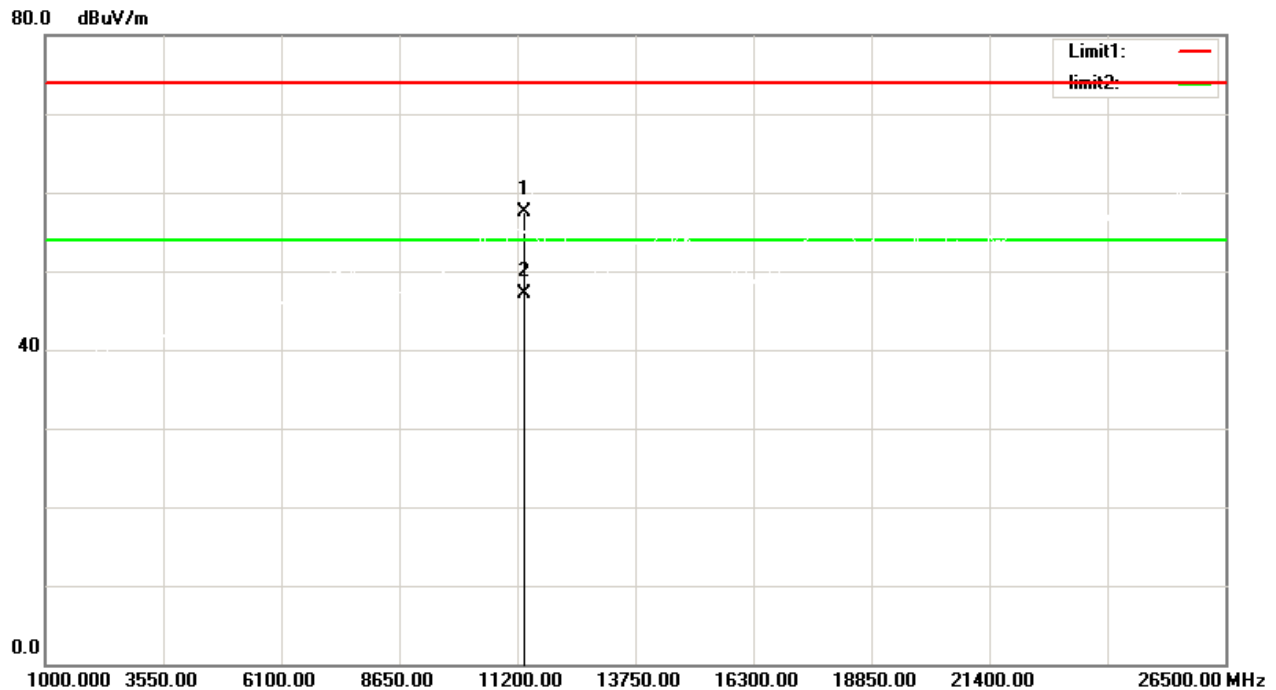

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11340.00	49.06	8.35	57.41	74.00	-16.59	peak	150	46
2	*	11340.00	38.68	8.35	47.03	54.00	-6.97	AVG	150	46

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz

Vertical

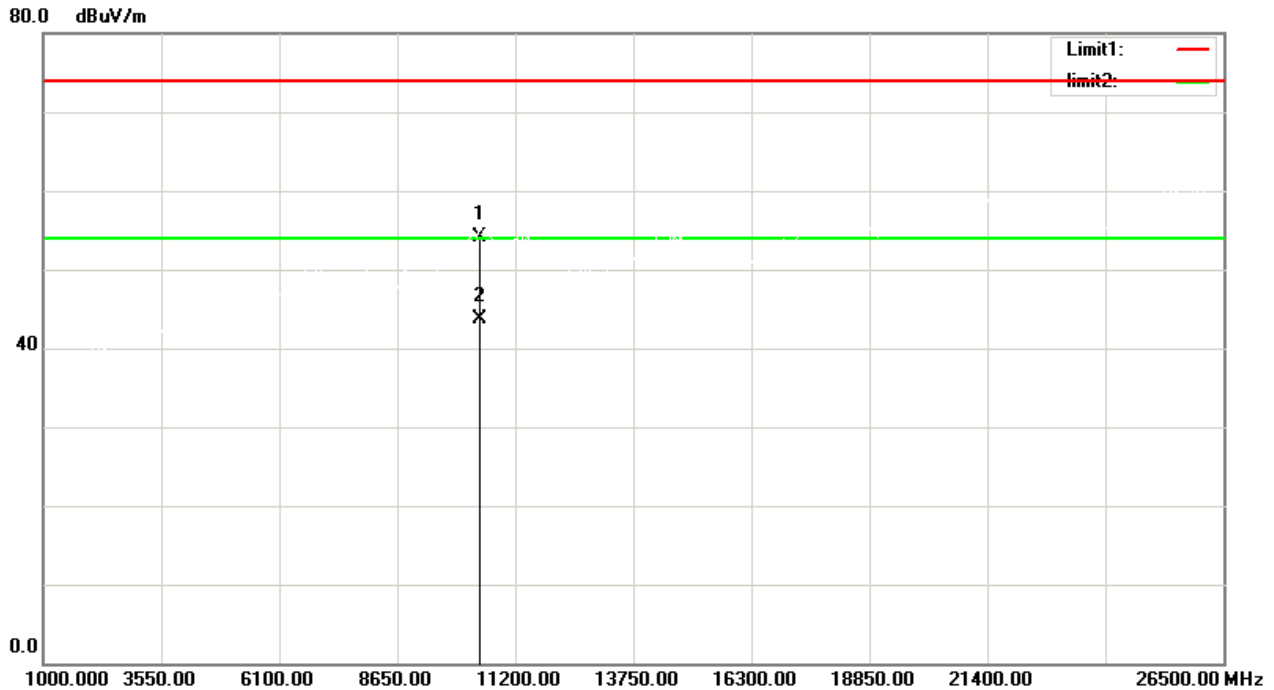


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		10420.00	46.08	8.12	54.20	74.00	-19.80	peak	150	76
2	*	10420.00	35.62	8.12	43.74	54.00	-10.26	AVG	150	76

Orthogonal Axis	X
Test Mode	UNII-1_TX AX (HE80) Mode 5210 MHz

Horizontal


80.0 dBuV/m

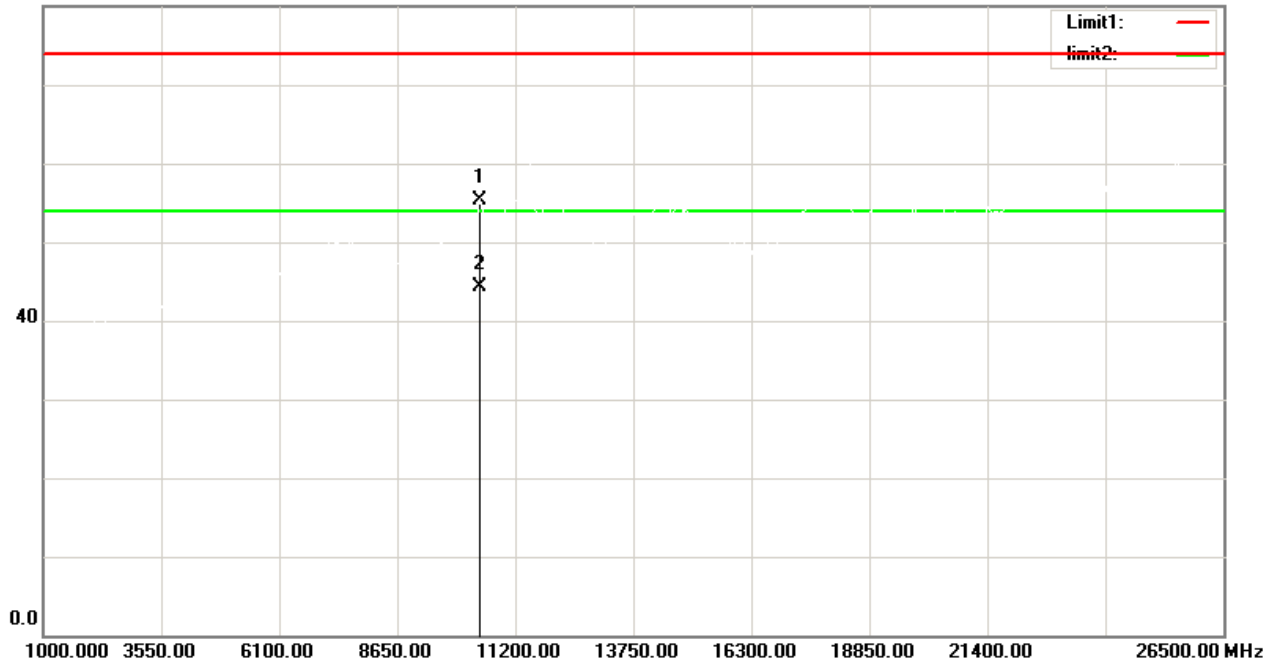

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10420.00	47.24	8.12	55.36	74.00	-18.64	peak	150	38	
2	*	10420.00	36.18	8.12	44.30	54.00	-9.70	AVG	150	38	


Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE80) Mode 5290 MHz

Vertical

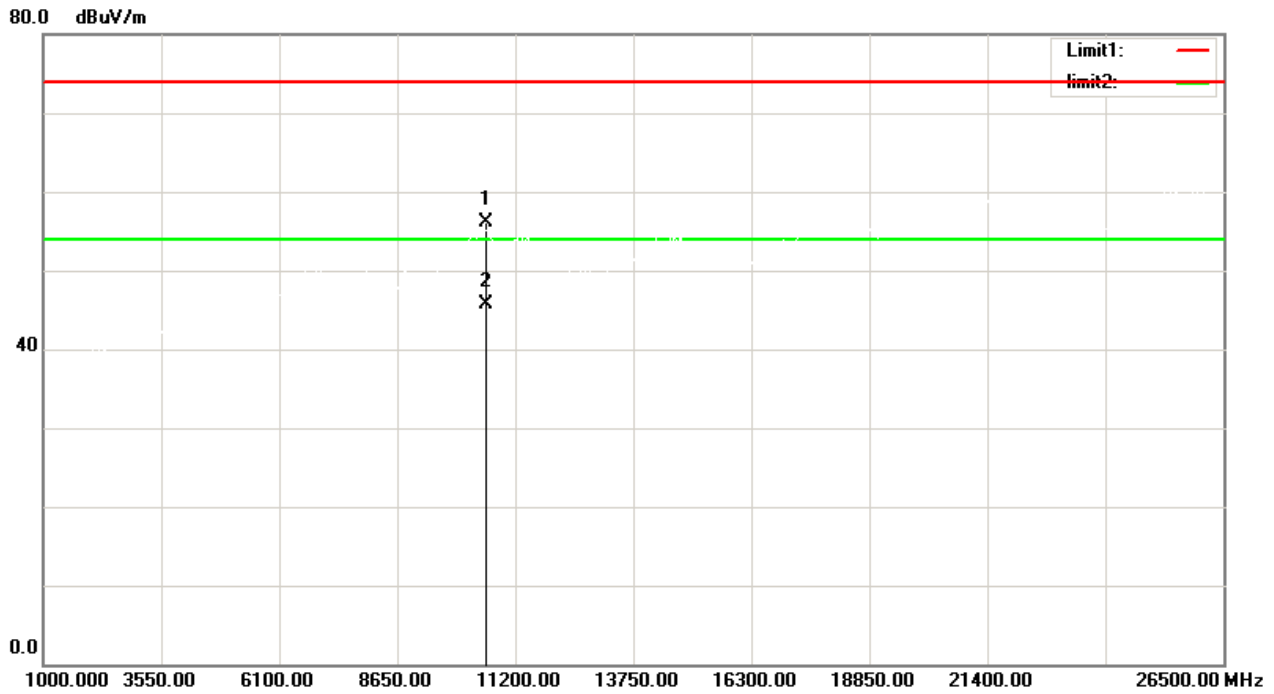

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		10580.00	47.68	8.43	56.11	74.00	-17.89	peak	150	63
2	*	10580.00	37.27	8.43	45.70	54.00	-8.30	AVG	150	63


Orthogonal Axis	X
Test Mode	UNII-2A_TX AX (HE80) Mode 5290 MHz

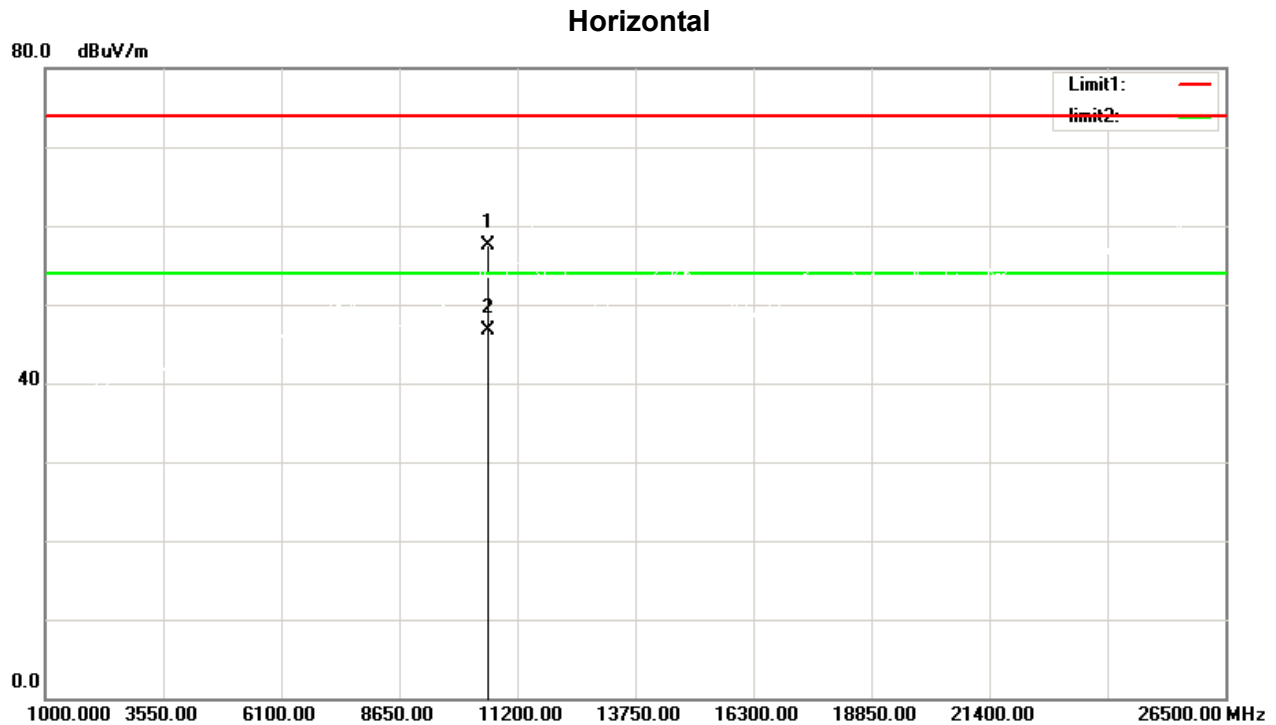

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		10580.00	49.05	8.43	57.48	74.00	-16.52	peak	150	39	
2	*	10580.00	38.36	8.43	46.79	54.00	-7.21	AVG	150	39	

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz

Vertical

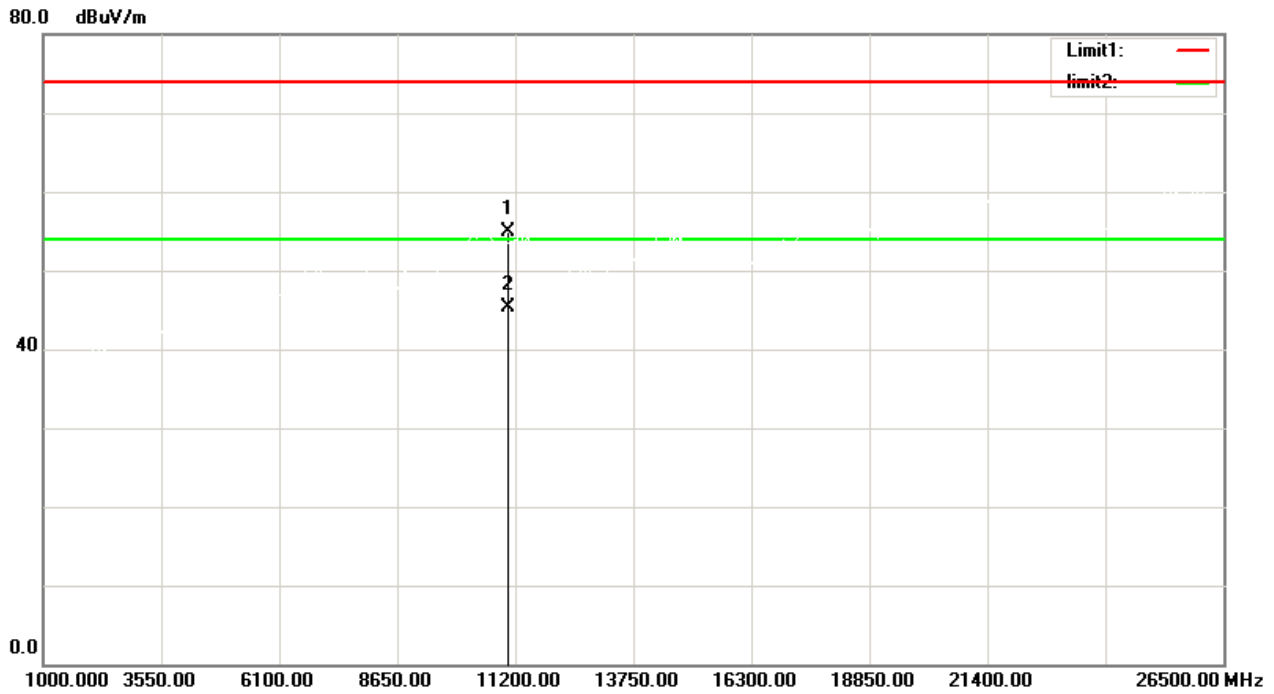


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11060.00	46.68	8.32	55.00	74.00	-19.00	peak	150	94
2	*	11060.00	36.92	8.32	45.24	54.00	-8.76	AVG	150	94

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE80) Mode 5530 MHz

Horizontal

80.0 dBuV/m

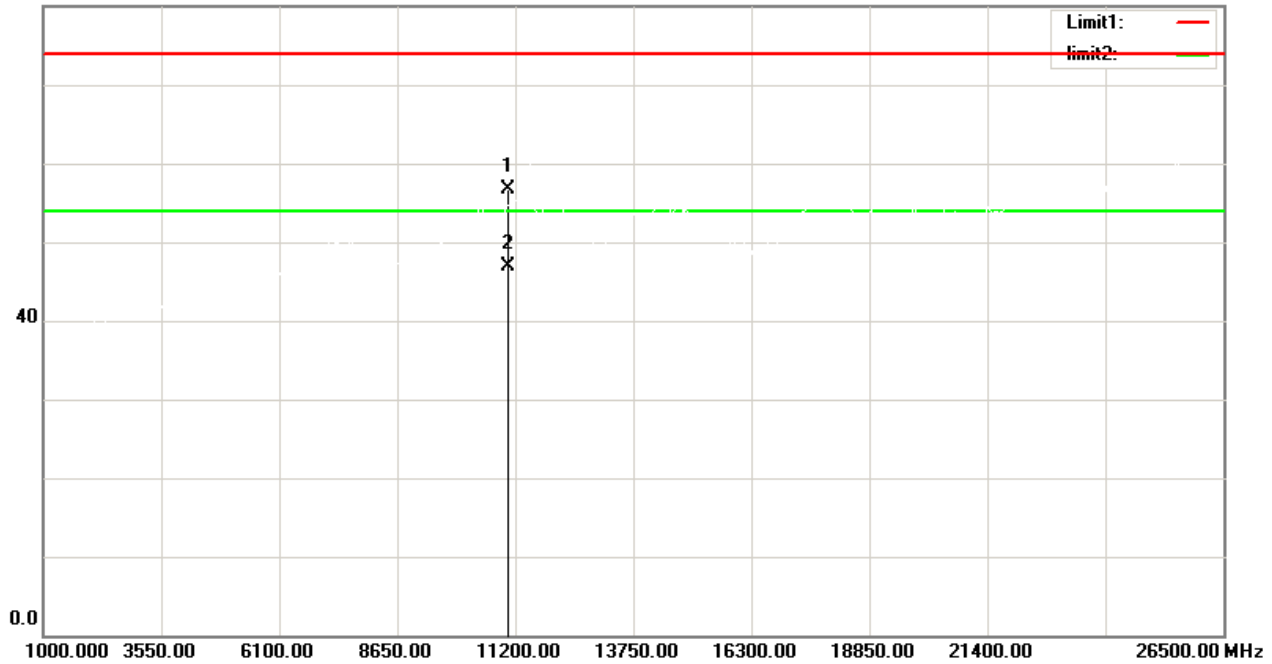


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11060.00	48.47	8.32	56.79	74.00	-17.21	peak	150	46
2	*	11060.00	38.58	8.32	46.90	54.00	-7.10	AVG	150	46

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz

Vertical

80.0 dBuV/m

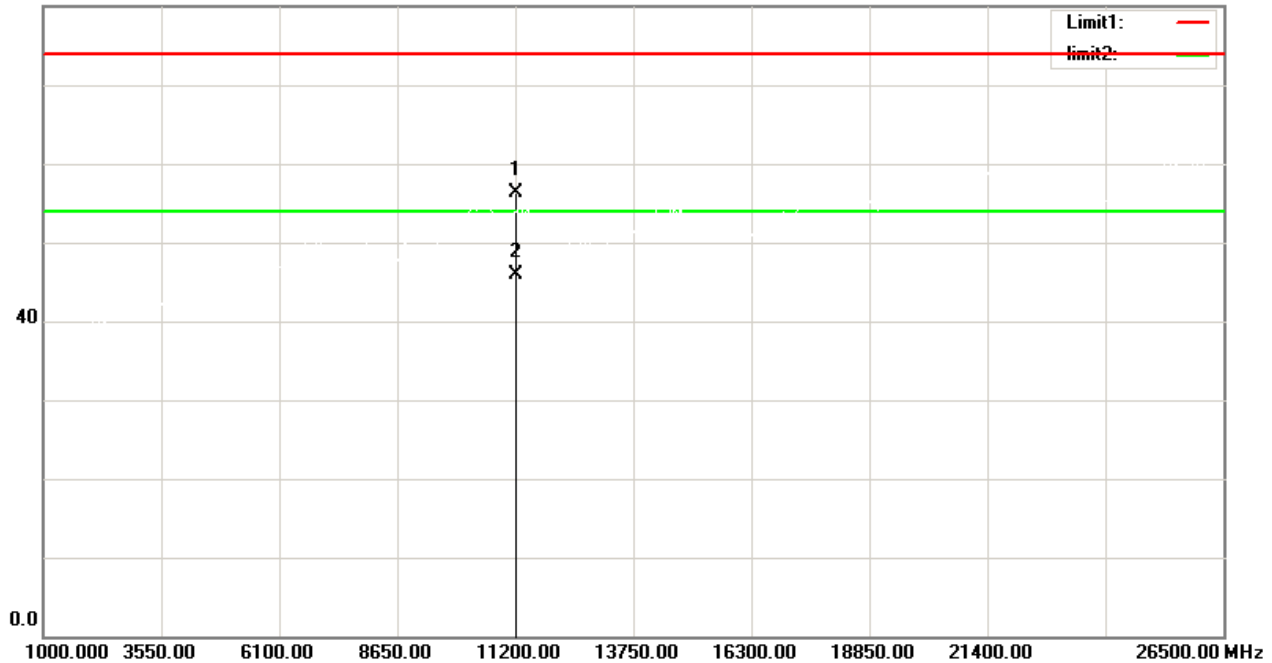


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11220.00	47.97	8.34	56.31	74.00	-17.69	peak	150	99
2	*	11220.00	37.65	8.34	45.99	54.00	-8.01	AVG	150	99

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX (HE80) Mode 5610 MHz


Horizontal

80.0 dBuV/m

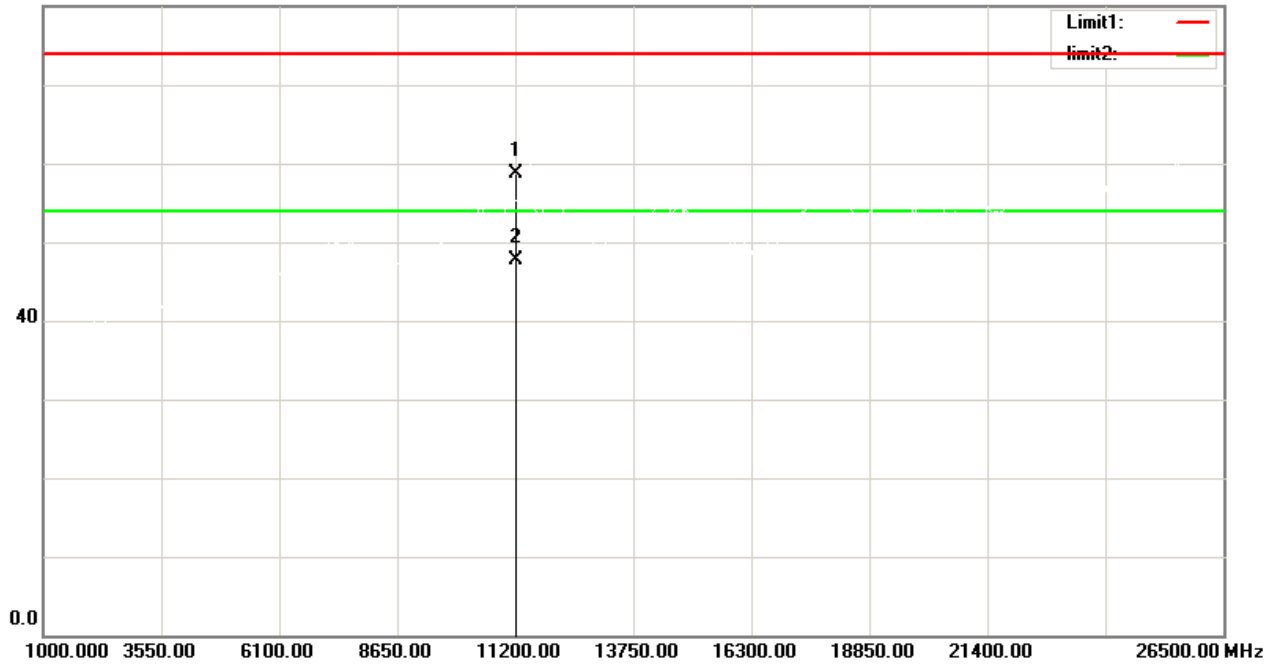


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11220.00	50.35	8.34	58.69	74.00	-15.31	peak	150	43	
2	*	11220.00	39.29	8.34	47.63	54.00	-6.37	AVG	150	43	

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5745 MHz

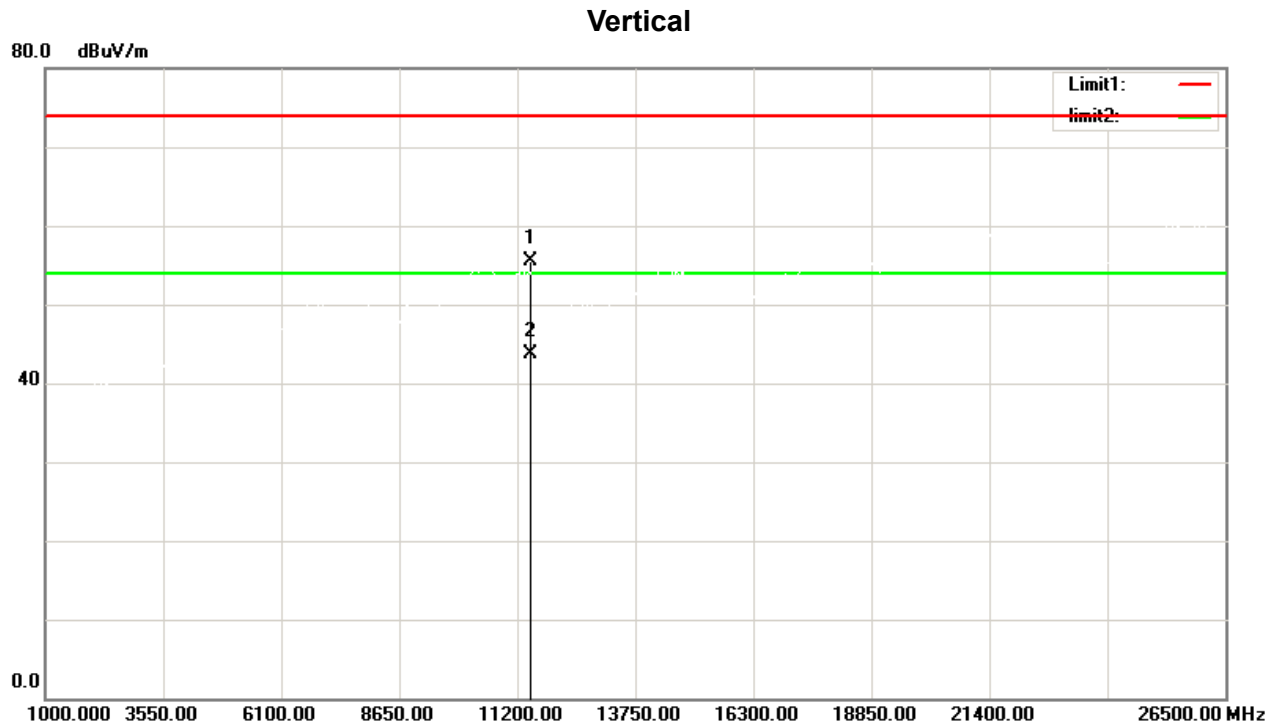

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		11490.00	47.24	8.36	55.60	74.00	-18.40	peak	150	86	
2	*	11490.00	35.44	8.36	43.80	54.00	-10.20	AVG	150	86	


Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5745 MHz

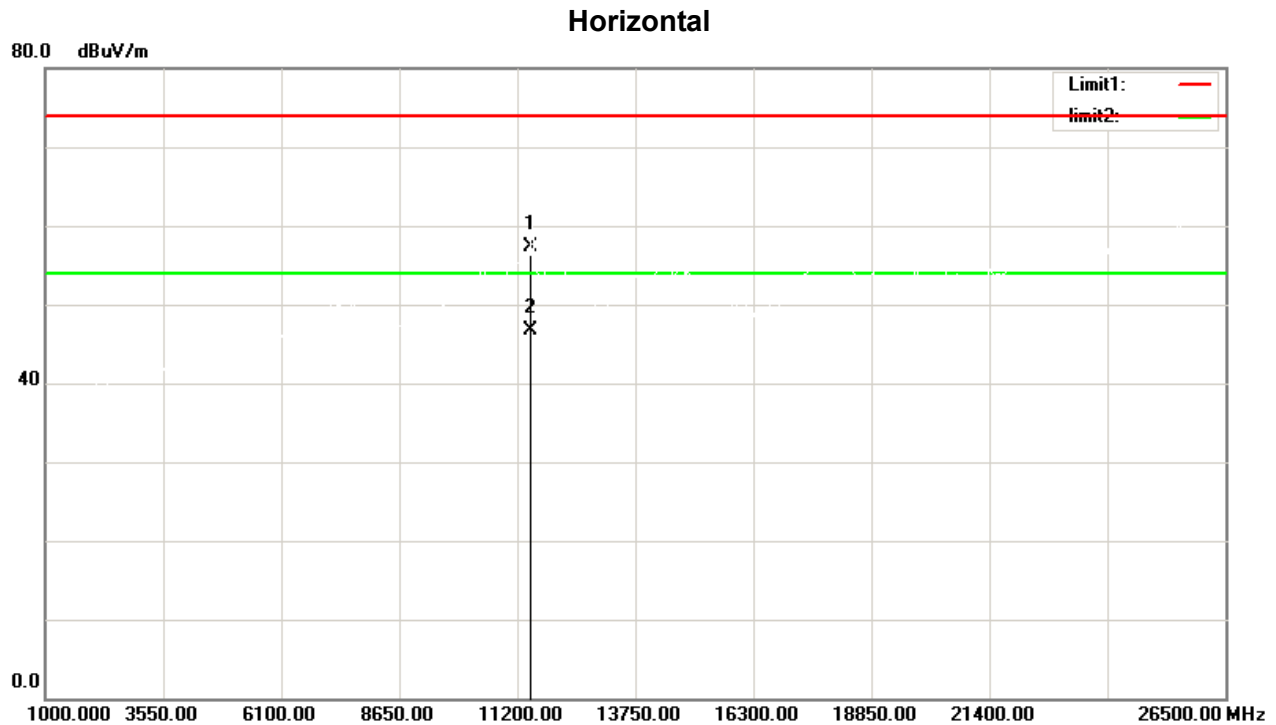

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11490.00	48.92	8.36	57.28	74.00	-16.72	peak	150	58	
2	*	11490.00	38.34	8.36	46.70	54.00	-7.30	AVG	150	58	


Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5785 MHz

Vertical

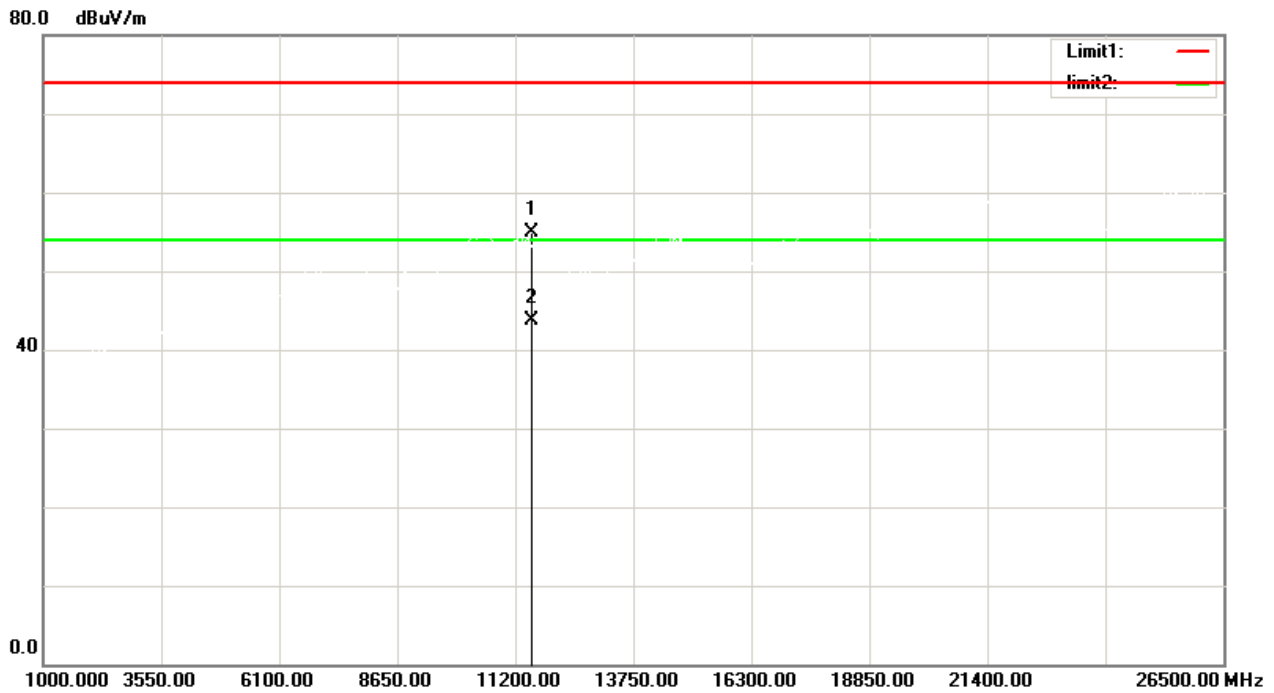

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11570.00	46.46	8.40	54.86	74.00	-19.14	peak	150	77
2	*	11570.00	35.27	8.40	43.67	54.00	-10.33	AVG	150	77


Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5785 MHz

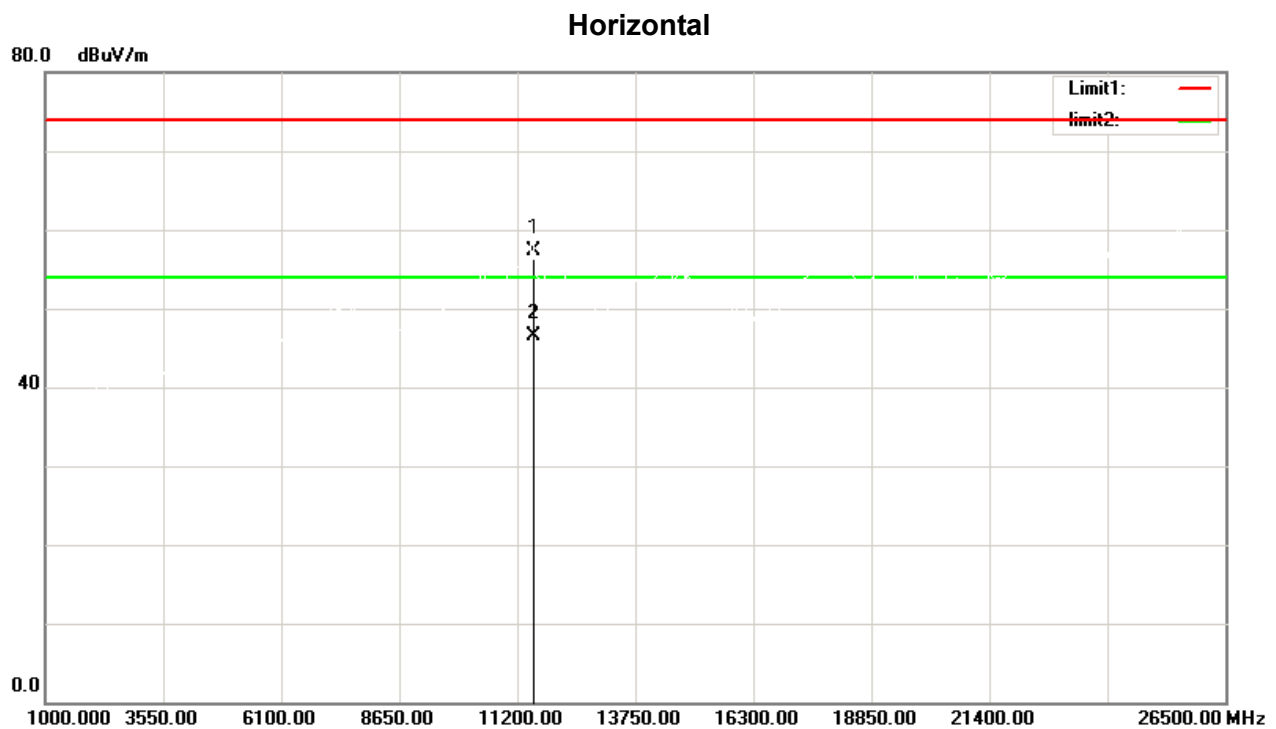

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11570.00	48.90	8.40	57.30	74.00	-16.70	peak	150	53
2	*	11570.00	38.10	8.40	46.50	54.00	-7.50	AVG	150	53


Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5825 MHz

Vertical

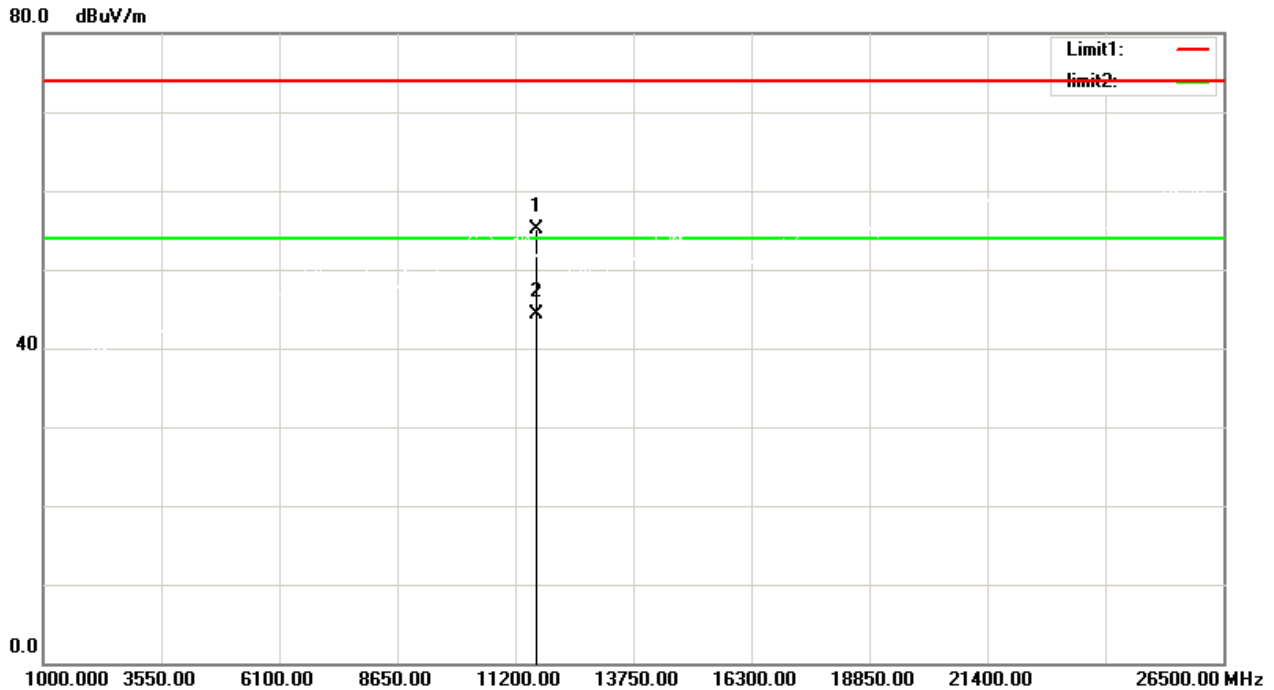


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11650.00	46.71	8.45	55.16	74.00	-18.84	peak	150	76
2	*	11650.00	35.84	8.45	44.29	54.00	-9.71	AVG	150	76

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE20) Mode 5825 MHz

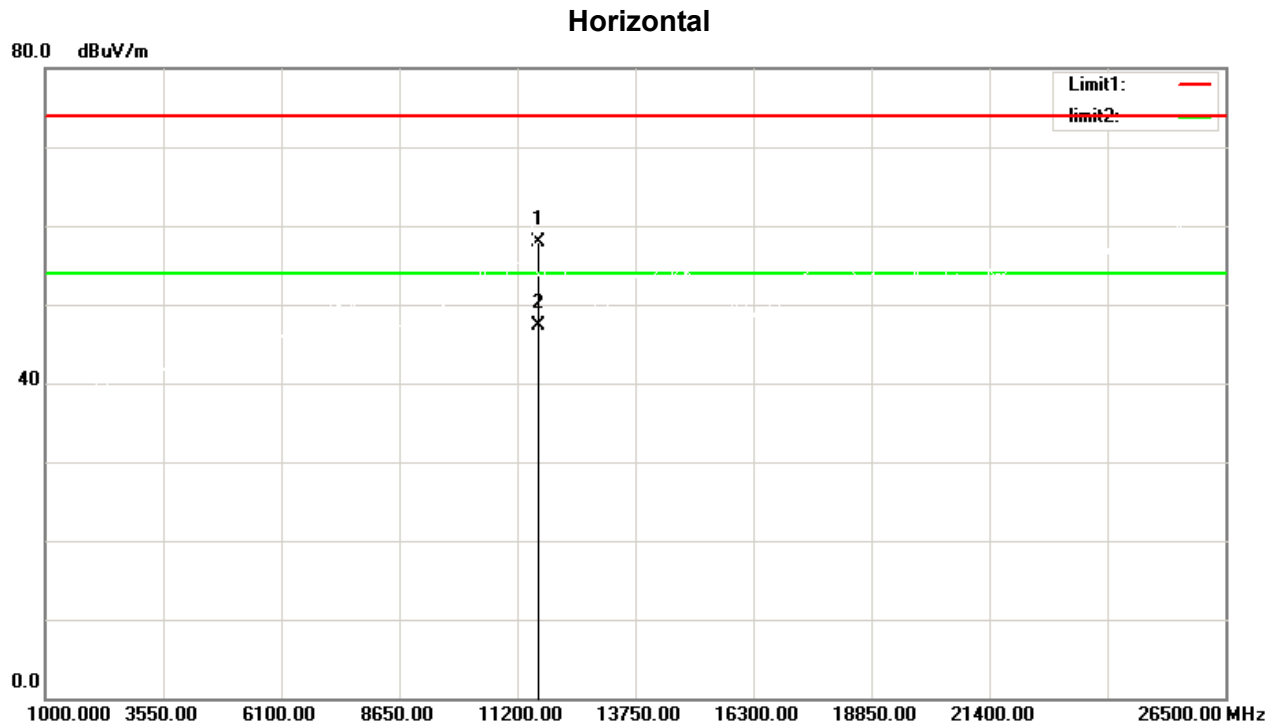


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11650.00	49.51	8.45	57.96	74.00	-16.04	peak	150	39
2	*	11650.00	38.81	8.45	47.26	54.00	-6.74	AVG	150	39

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz

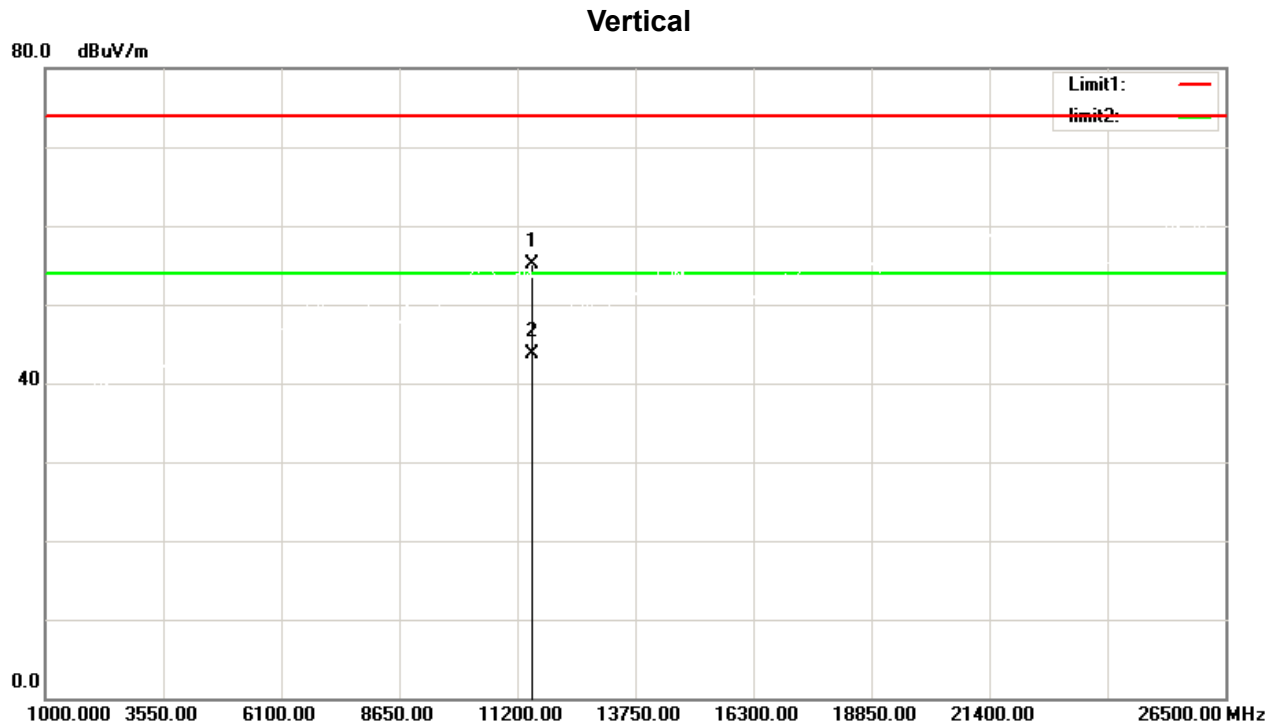


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11510.00	46.66	8.35	55.01	74.00	-18.99	peak	150	67
2	*	11510.00	35.35	8.35	43.70	54.00	-10.30	AVG	150	67

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5755 MHz

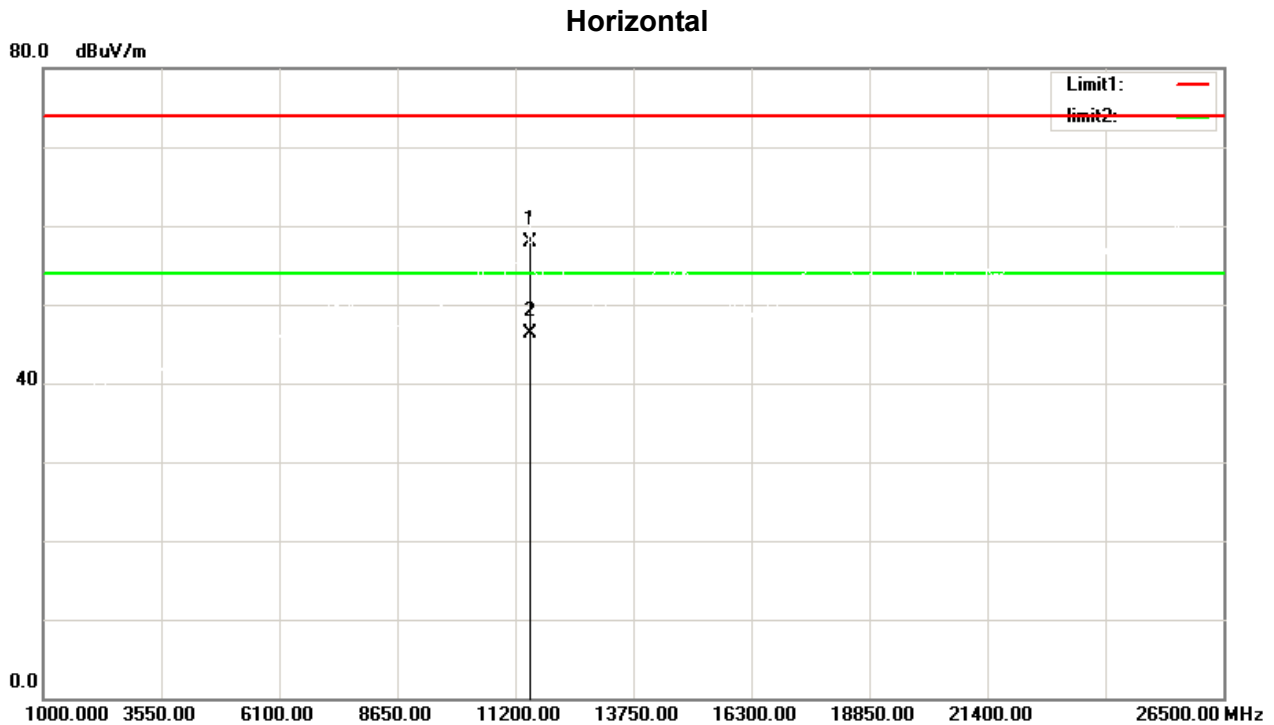


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11510.00	49.64	8.35	57.99	74.00	-16.01	peak	150	35
2	*	11510.00	37.96	8.35	46.31	54.00	-7.69	AVG	150	35

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz

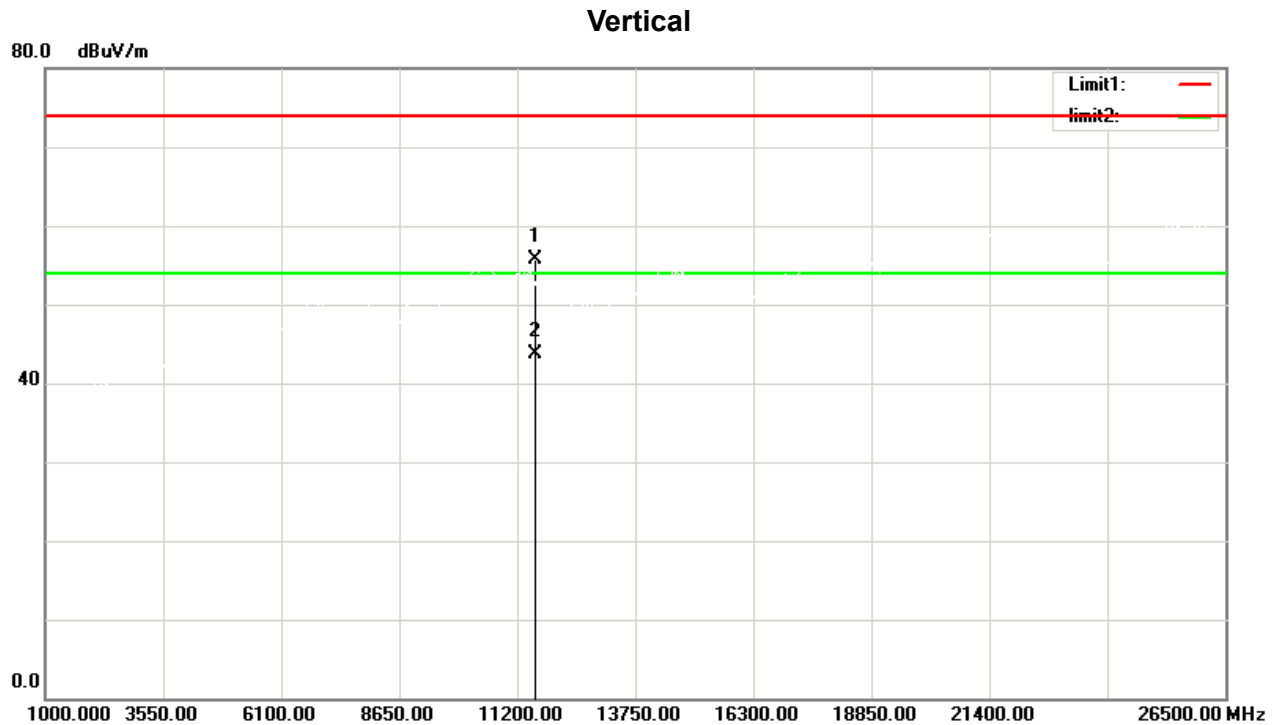


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11590.00	47.38	8.41	55.79	74.00	-18.21	peak	150	86	
2	*	11590.00	35.35	8.41	43.76	54.00	-10.24	AVG	150	86	

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE40) Mode 5795 MHz

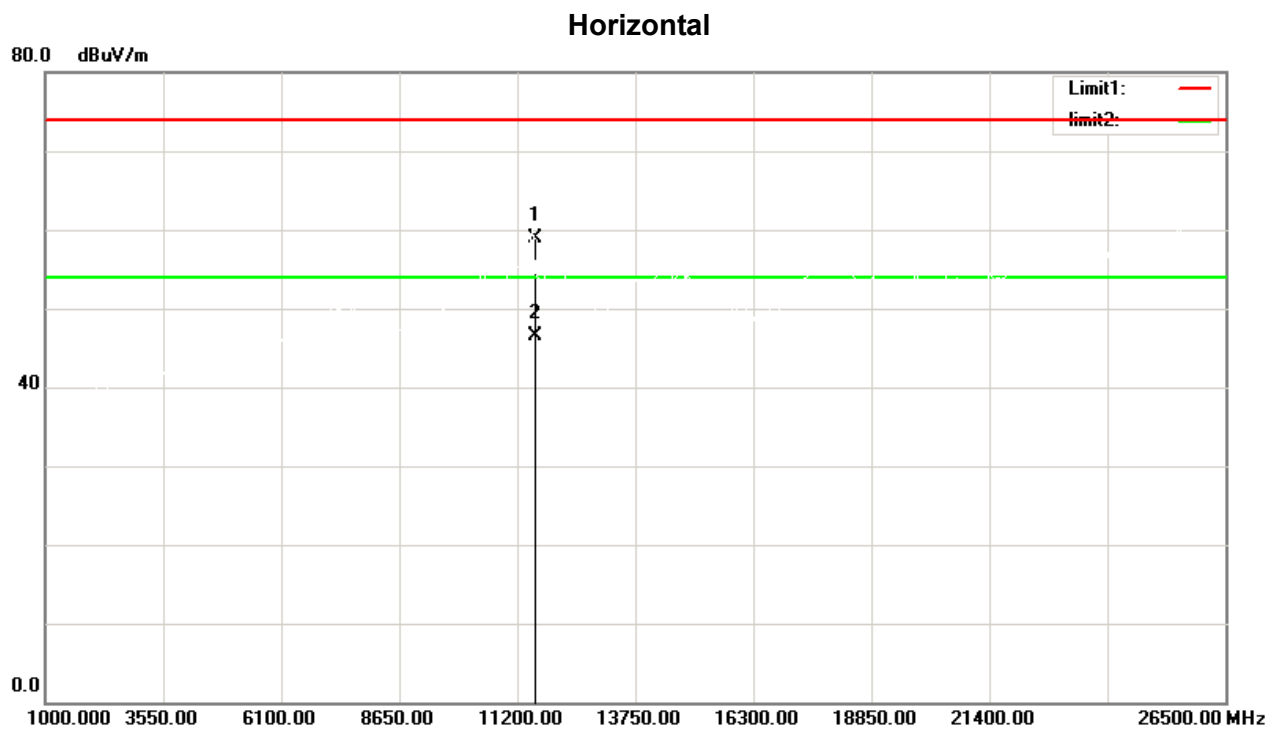


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11590.00	50.57	8.41	58.98	74.00	-15.02	peak	150	63
2	*	11590.00	38.14	8.41	46.55	54.00	-7.45	AVG	150	63

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz

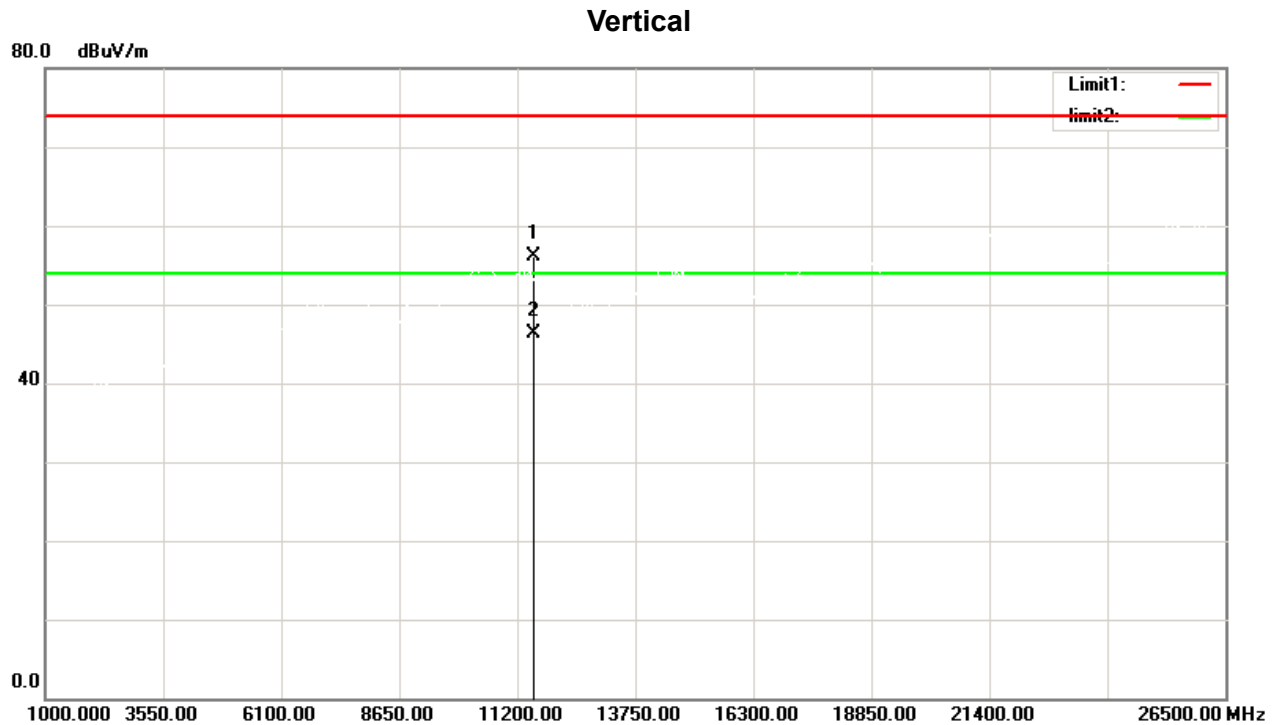

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		11550.00	47.64	8.38	56.02	74.00	-17.98	peak	150	86
2	*	11550.00	38.00	8.38	46.38	54.00	-7.62	AVG	150	86

Orthogonal Axis	X
Test Mode	UNII-3_TX AX (HE80) Mode 5775 MHz

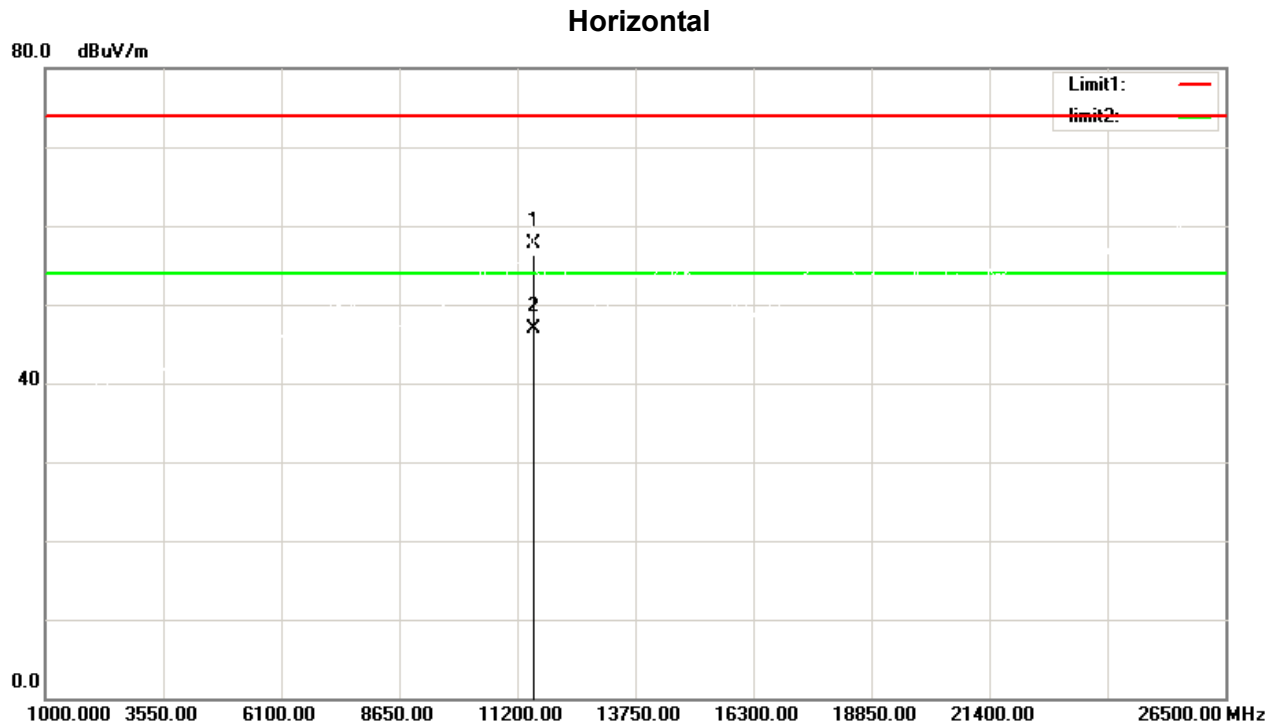

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		11550.00	49.28	8.38	57.66	74.00	-16.34	peak	150	45
2	*	11550.00	38.52	8.38	46.90	54.00	-7.10	AVG	150	45

6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407) RSS-Gen and RSS-247			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a) 15.407(e) RSS-247 6.2.1.1 RSS-247 6.2.4.1	26 dB Bandwidth	-	5150-5250
	6dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz) 1 MHz (Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz) 3 MHz (Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB / 6dB below carrier.

6.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2025/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

6.4 TEST SETUP




6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.


6.6 TEST RESULTS

UNII-1_TX A Mode			
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.51	16.979
40	5200	21.45	17.049
48	5240	21.29	16.866


CH36

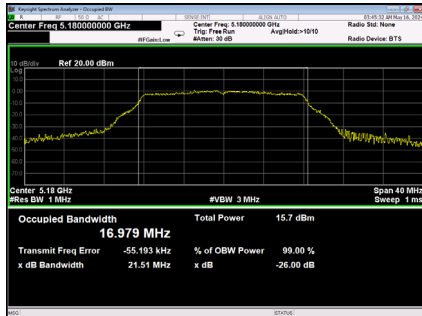

CH40

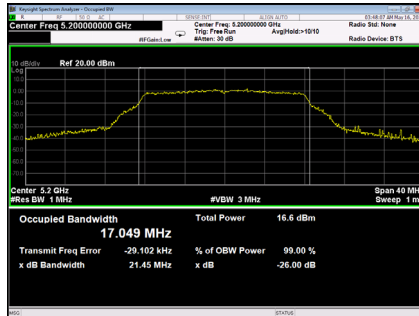


CH48

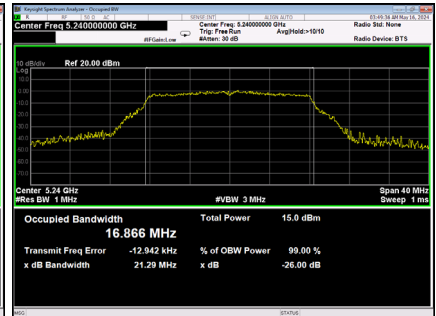


UNII-2A_TX A Mode			
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	21.62	16.866
60	5300	21.31	16.917
64	5320	21.47	16.858


CH52

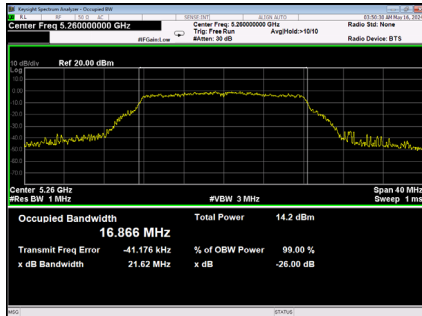

CH60

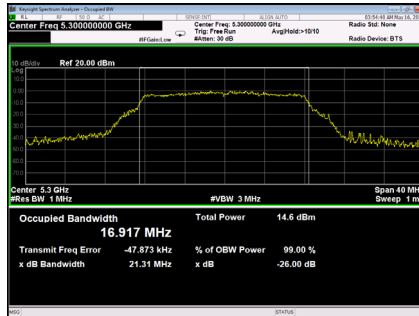


CH64

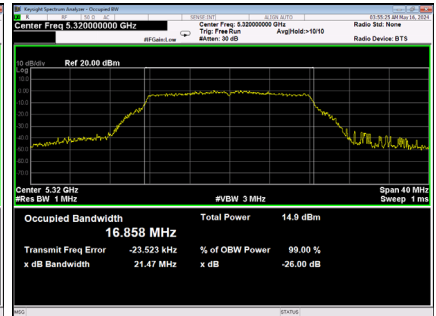


UNII-2C_TX A Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	21.24	16.871
120	5600	21.52	16.888
140	5700	21.43	16.934


CH100

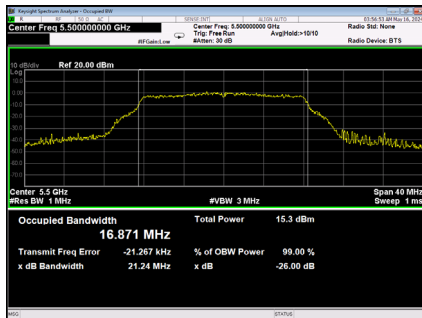

CH120

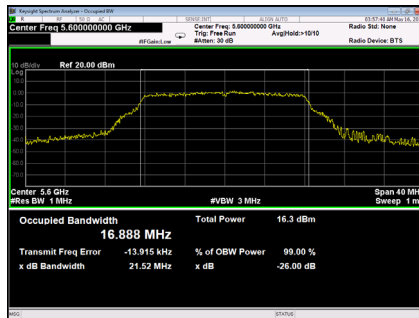


CH140

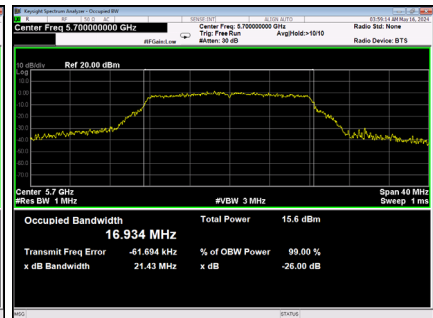


UNII-1_TX N (HT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	21.53	17.957
40	5200	21.64	17.960
48	5240	21.72	17.933


CH36

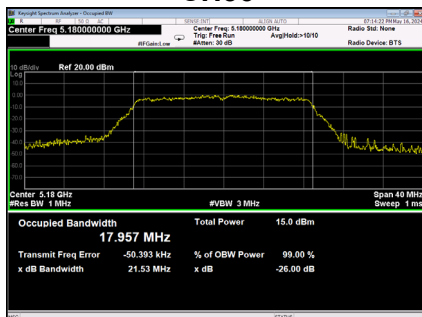

CH40

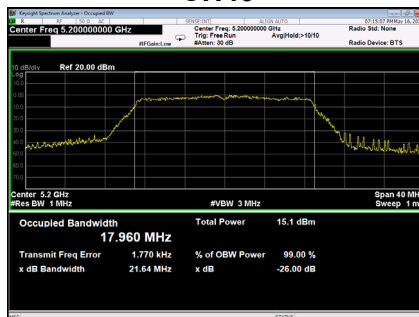


CH48

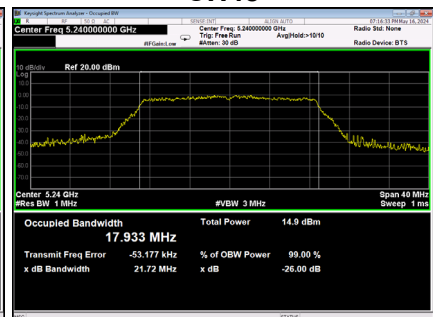


UNII-2A_TX N (HT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	21.51	17.961
60	5300	21.63	17.973
64	5320	21.61	17.965


CH52

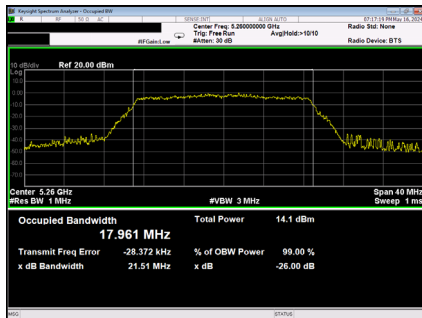

CH60

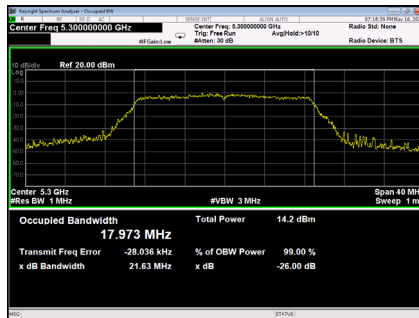


CH64

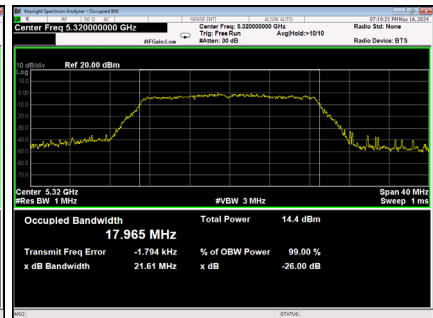


UNII-2C_TX N (HT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	21.51	17.950
120	5600	21.50	17.944
140	5700	21.42	18.006


CH100

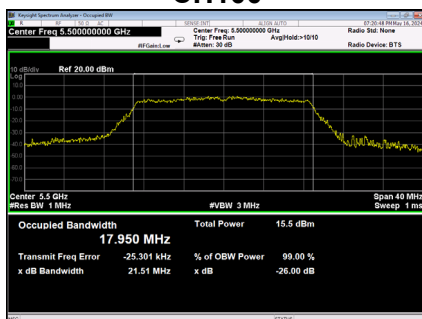

CH120

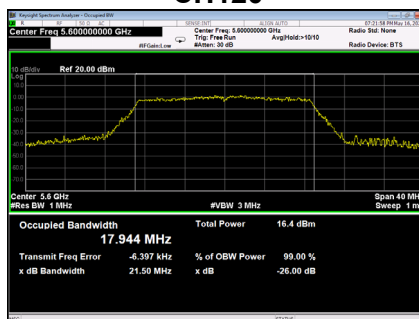


CH140

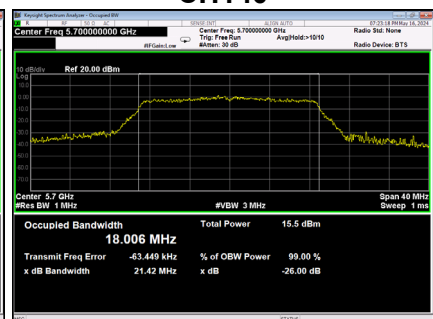


UNII-1_TX N (HT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	39.98	39.307
46	5230	39.70	36.259

CH38

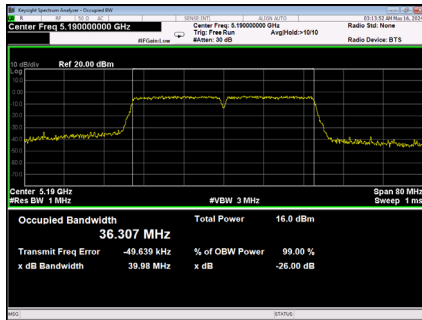


CH46

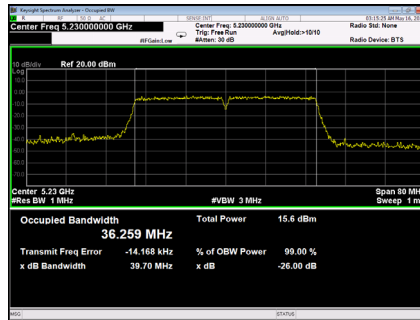


UNII-2A_TX N (HT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	39.99	36.298
62	5310	40.04	36.261

CH54

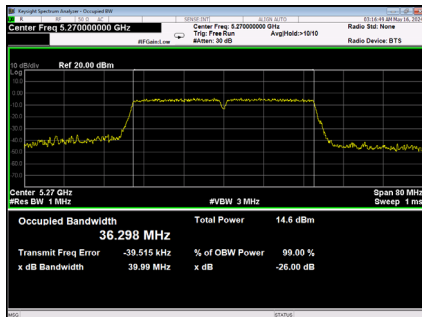


CH62

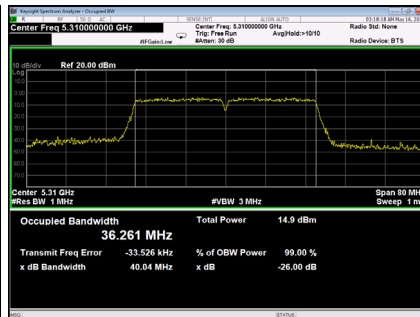


UNII-2C_TX N (HT40) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
102	5510	39.88	36.314
118	5590	39.72	36.348
134	5670	39.99	36.272

CH102

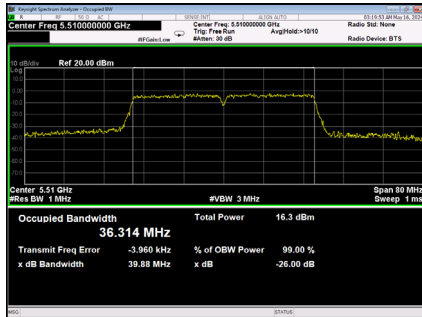

CH118

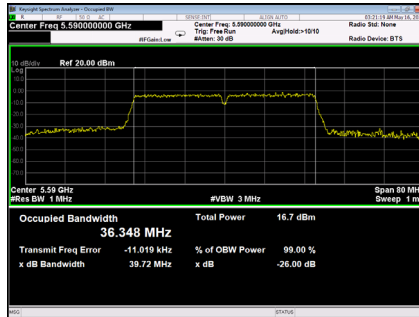

CH134

