


5.15-5.25GHz_802.11n HT20_Nss1,(MCS0)_1TX


5200MHz_TX

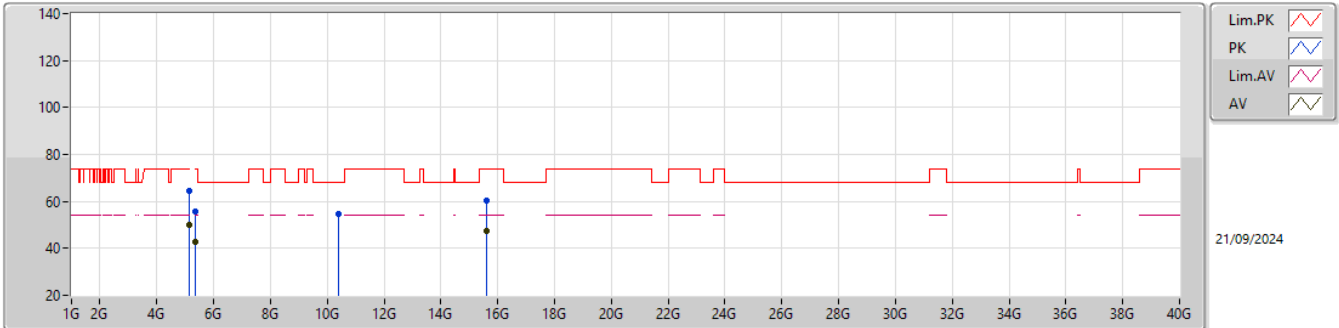

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	5.15G	50.13	54.00	-3.87	49.79	3	Vertical	321	2.13	-	32.00	7.04	38.70				
PK	5.15G	64.49	74.00	-9.51	64.15	3	Vertical	321	2.13	-	32.00	7.04	38.70				
AV	5.35G	42.81	54.00	-11.19	43.06	3	Vertical	321	2.13	-	31.30	7.23	38.78				
PK	5.35G	55.76	74.00	-18.24	56.01	3	Vertical	321	2.13	-	31.30	7.23	38.78				
PK	10.4G	54.69	68.20	-13.51	47.31	3	Vertical	236	3.02	-	39.70	9.79	42.11				
AV	15.6G	47.53	54.00	-6.47	43.52	3	Vertical	308	2.11	-	38.30	11.35	45.64				
PK	15.6G	60.58	74.00	-13.42	56.57	3	Vertical	308	2.11	-	38.30	11.35	45.64				

5.15-5.25GHz_802.11n HT20_Nss1,(MCS0)_1TX


5240MHz_TX

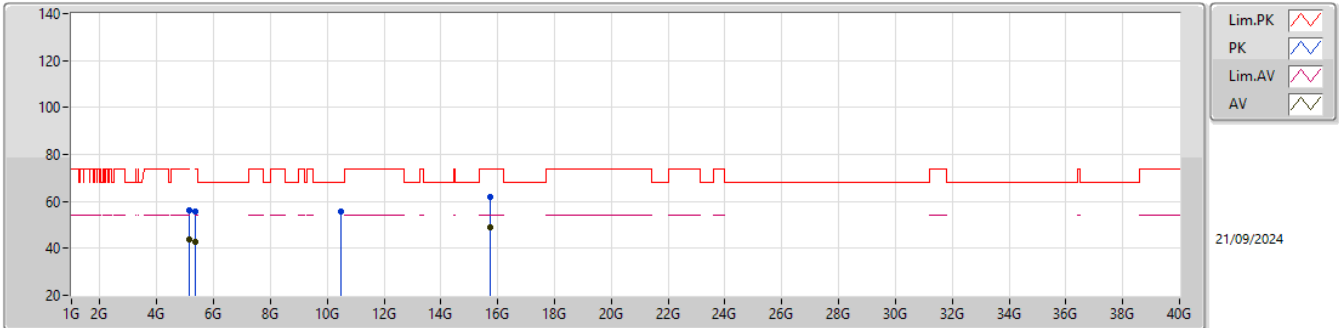

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	43.77	54.00	-10.23	43.43	3	Horizontal	30	3.59	-	32.00	7.04	38.70			
PK	5.15G	56.42	74.00	-17.58	56.08	3	Horizontal	30	3.59	-	32.00	7.04	38.70			
AV	5.35G	42.86	54.00	-11.14	43.11	3	Horizontal	30	3.59	-	31.30	7.23	38.78			
PK	5.35G	55.93	74.00	-18.07	56.18	3	Horizontal	30	3.59	-	31.30	7.23	38.78			
PK	10.48G	55.85	68.20	-12.35	48.57	3	Horizontal	210	1.29	-	39.64	9.81	42.17			
AV	15.72G	49.01	54.00	-4.99	44.77	3	Horizontal	5	1.39	-	38.36	11.46	45.58			
PK	15.72G	62.05	74.00	-11.95	57.81	3	Horizontal	5	1.39	-	38.36	11.46	45.58			

5.15-5.25GHz_802.11n HT20_Nss1,(MCS0)_1TX


5240MHz_TX

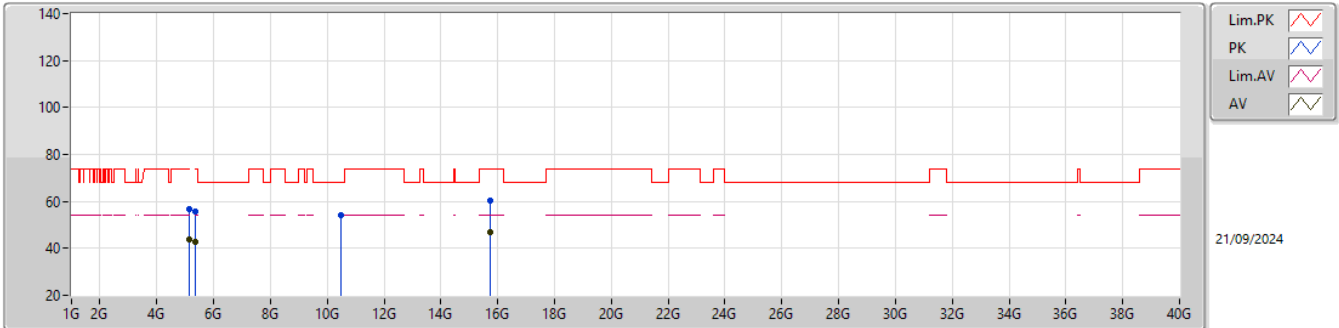

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	43.93	54.00	-10.07	43.59	3	Vertical	321	1.95	-	32.00	7.04	38.70			
PK	5.15G	56.59	74.00	-17.41	56.25	3	Vertical	321	1.95	-	32.00	7.04	38.70			
AV	5.35G	42.96	54.00	-11.04	43.21	3	Vertical	321	1.95	-	31.30	7.23	38.78			
PK	5.35G	55.62	74.00	-18.38	55.87	3	Vertical	321	1.95	-	31.30	7.23	38.78			
PK	10.48G	54.29	68.20	-13.91	47.01	3	Vertical	244	3.00	-	39.64	9.81	42.17			
AV	15.72G	47.03	54.00	-6.97	42.79	3	Vertical	305	2.21	-	38.36	11.46	45.58			
PK	15.72G	60.44	74.00	-13.56	56.20	3	Vertical	305	2.21	-	38.36	11.46	45.58			

5.25-5.35GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5260MHz_TX

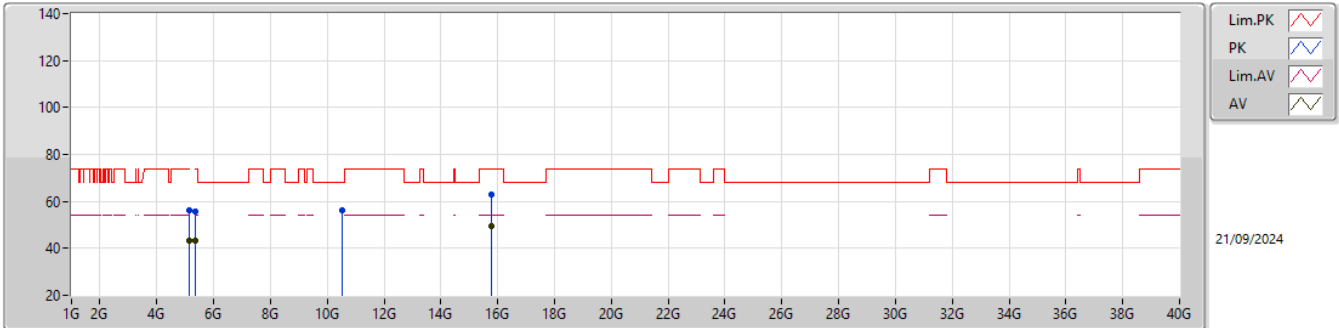

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	5.15G	43.24	54.00	-10.76	42.90	3	Horizontal	34	3.65	-	32.00	7.04	38.70				
PK	5.15G	56.19	74.00	-17.81	55.85	3	Horizontal	34	3.65	-	32.00	7.04	38.70				
AV	5.35G	43.33	54.00	-10.67	43.58	3	Horizontal	34	3.65	-	31.30	7.23	38.78				
PK	5.35G	55.84	74.00	-18.16	56.09	3	Horizontal	34	3.65	-	31.30	7.23	38.78				
PK	10.52G	55.97	68.20	-12.23	48.79	3	Horizontal	213	1.35	-	39.56	9.81	42.19				
AV	15.78G	49.66	54.00	-4.34	45.68	3	Horizontal	2	1.41	-	38.00	11.52	45.54				
PK	15.78G	62.81	74.00	-11.19	58.83	3	Horizontal	2	1.41	-	38.00	11.52	45.54				

5.25-5.35GHz_802.11n HT20_Nss1,(MCS0)_1TX


5260MHz_TX

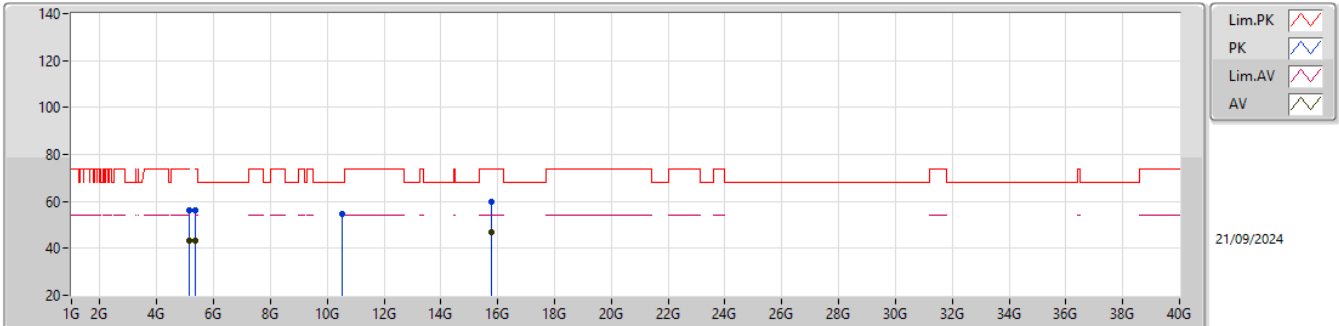

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	43.46	54.00	-10.54	43.12	3	Vertical	326	1.95	-	32.00	7.04	38.70			
PK	5.15G	56.16	74.00	-17.84	55.82	3	Vertical	326	1.95	-	32.00	7.04	38.70			
AV	5.35G	43.22	54.00	-10.78	43.47	3	Vertical	326	1.95	-	31.30	7.23	38.78			
PK	5.35G	56.04	74.00	-17.96	56.29	3	Vertical	326	1.95	-	31.30	7.23	38.78			
PK	10.52G	54.53	68.20	-13.67	47.35	3	Vertical	243	3.01	-	39.56	9.81	42.19			
AV	15.78G	47.05	54.00	-6.95	43.07	3	Vertical	304	2.11	-	38.00	11.52	45.54			
PK	15.78G	59.84	74.00	-14.16	55.86	3	Vertical	304	2.11	-	38.00	11.52	45.54			

5.25-5.35GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5300MHz_TX

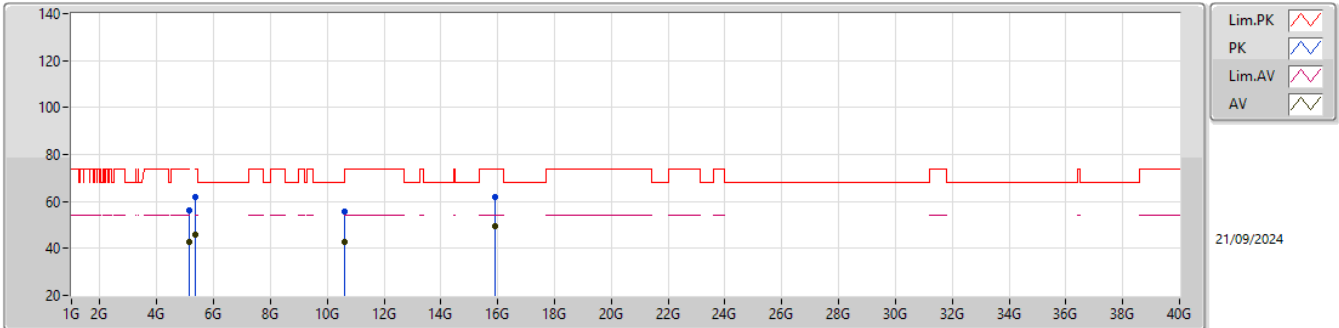

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	42.83	54.00	-11.17	42.49	3	Horizontal	25	3.64	-	32.00	7.04	38.70			
PK	5.15G	56.29	74.00	-17.71	55.95	3	Horizontal	25	3.64	-	32.00	7.04	38.70			
AV	5.35G	46.10	54.00	-7.90	46.35	3	Horizontal	31	3.64	-	31.30	7.23	38.78			
PK	5.35G	62.09	74.00	-11.91	62.34	3	Horizontal	31	3.64	-	31.30	7.23	38.78			
AV	10.6G	42.51	54.00	-11.49	34.93	3	Horizontal	160	1.78	-	40.00	9.83	42.25			
PK	10.6G	55.44	74.00	-18.56	47.86	3	Horizontal	160	1.78	-	40.00	9.83	42.25			
AV	15.9G	49.39	54.00	-4.61	45.04	3	Horizontal	165	1.45	-	38.20	11.63	45.48			
PK	15.9G	62.04	74.00	-11.96	57.69	3	Horizontal	165	1.45	-	38.20	11.63	45.48			

5.25-5.35GHz_802.11n HT20_Nss1,(MCS0)_1TX


5300MHz_TX

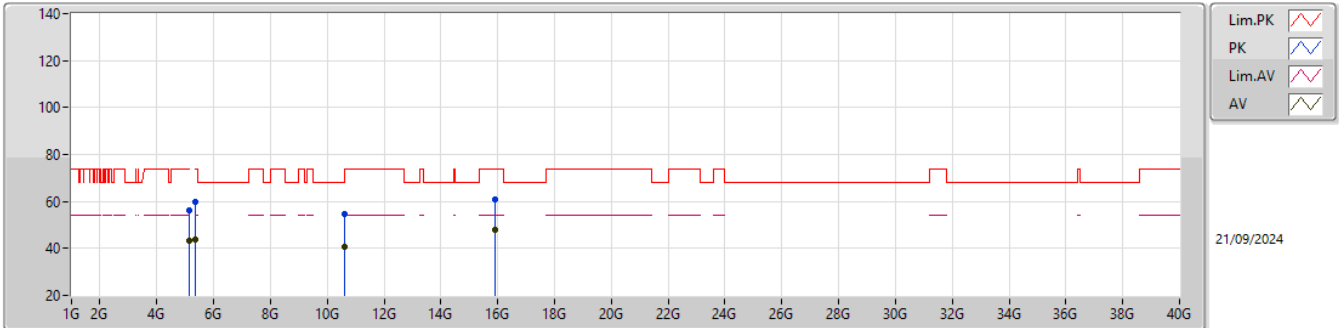

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	43.46	54.00	-10.54	43.12	3	Vertical	341	1.95	-	32.00	7.04	38.70			
PK	5.15G	56.45	74.00	-17.55	56.11	3	Vertical	341	1.95	-	32.00	7.04	38.70			
AV	5.35G	43.72	54.00	-10.28	43.97	3	Vertical	341	1.95	-	31.30	7.23	38.78			
PK	5.35G	59.93	74.00	-14.07	60.18	3	Vertical	341	1.95	-	31.30	7.23	38.78			
AV	10.6G	40.63	54.00	-13.37	33.05	3	Vertical	18	1.72	-	40.00	9.83	42.25			
PK	10.6G	54.49	74.00	-19.51	46.91	3	Vertical	18	1.72	-	40.00	9.83	42.25			
AV	15.9G	47.79	54.00	-6.21	43.44	3	Vertical	320	1.93	-	38.20	11.63	45.48			
PK	15.9G	60.99	74.00	-13.01	56.64	3	Vertical	320	1.93	-	38.20	11.63	45.48			

5.25-5.35GHz_802.11n HT20_Nss1,(MCS0)_1TX


5320MHz_TX

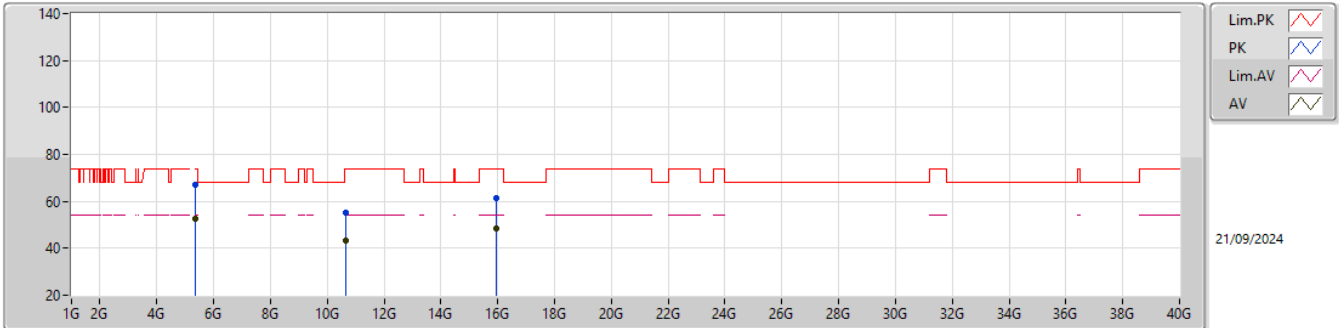

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.35G	52.35	54.00	-1.65	52.60	3	Horizontal	29	3.48	-	31.30	7.23	38.78			
PK	5.35G	67.06	74.00	-6.94	67.31	3	Horizontal	29	3.48	-	31.30	7.23	38.78			
AV	10.64G	43.16	54.00	-10.84	35.52	3	Horizontal	176	1.00	-	40.08	9.84	42.28			
PK	10.64G	55.07	74.00	-18.93	47.43	3	Horizontal	176	1.00	-	40.08	9.84	42.28			
AV	15.96G	48.37	54.00	-5.63	44.04	3	Horizontal	172	1.39	-	38.10	11.68	45.45			
PK	15.96G	61.55	74.00	-12.45	57.22	3	Horizontal	172	1.39	-	38.10	11.68	45.45			

5.25-5.35GHz_802.11n HT20_Nss1,(MCS0)_1TX


5320MHz_TX

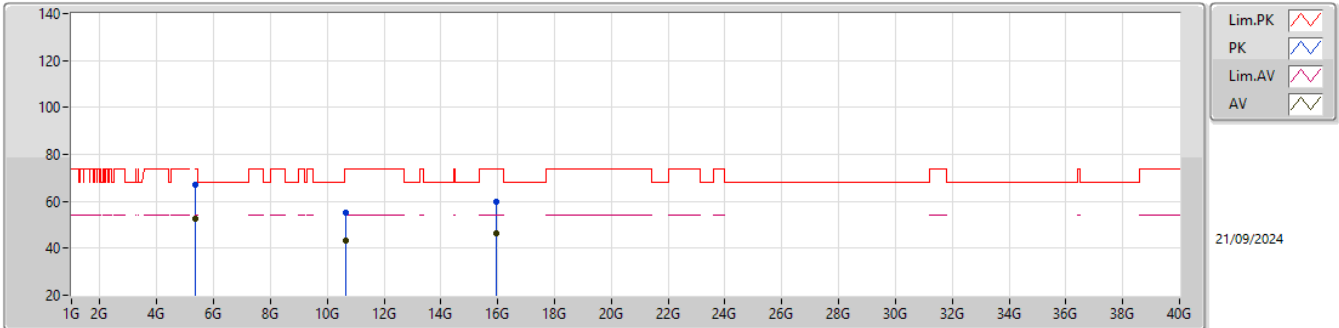

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.35G	52.77	54.00	-1.23	53.02	3	Vertical	313	1.96	-	31.30	7.23	38.78			
PK	5.35G	67.31	74.00	-6.69	67.56	3	Vertical	313	1.96	-	31.30	7.23	38.78			
AV	10.64G	43.04	54.00	-10.96	35.40	3	Vertical	19	1.00	-	40.08	9.84	42.28			
PK	10.64G	55.01	74.00	-18.99	47.37	3	Vertical	19	1.00	-	40.08	9.84	42.28			
AV	15.96G	46.26	54.00	-7.74	41.93	3	Vertical	315	1.94	-	38.10	11.68	45.45			
PK	15.96G	59.67	74.00	-14.33	55.34	3	Vertical	315	1.94	-	38.10	11.68	45.45			

5.47-5.725GHz_802.11n HT20_Nss1,(MCS0)_1TX


5500MHz_TX

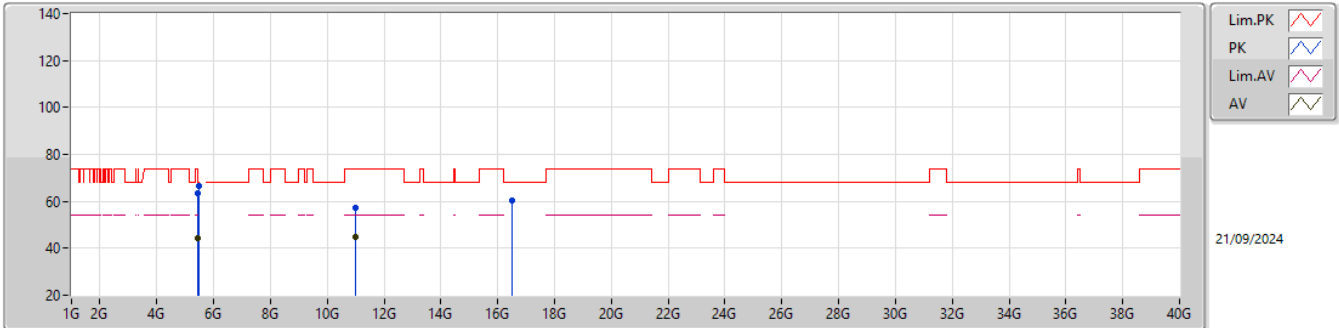

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	44.11	54.00	-9.89	43.72	3	Horizontal	28	3.65	-	31.90	7.31	38.82			
PK	5.46G	63.42	74.00	-10.58	63.03	3	Horizontal	28	3.65	-	31.90	7.31	38.82			
PK	5.47G	66.78	68.20	-1.42	66.39	3	Horizontal	28	3.65	-	31.90	7.31	38.82			
AV	11G	44.85	54.00	-9.15	37.27	3	Horizontal	125	1.30	-	40.20	9.93	42.55			
PK	11G	57.40	74.00	-16.60	49.82	3	Horizontal	125	1.30	-	40.20	9.93	42.55			
PK	16.5G	60.19	68.20	-8.01	53.69	3	Horizontal	166	1.12	-	40.00	12.16	45.66			

5.47-5.725GHz_802.11n HT20_Nss1,(MCS0)_1TX


5500MHz_TX

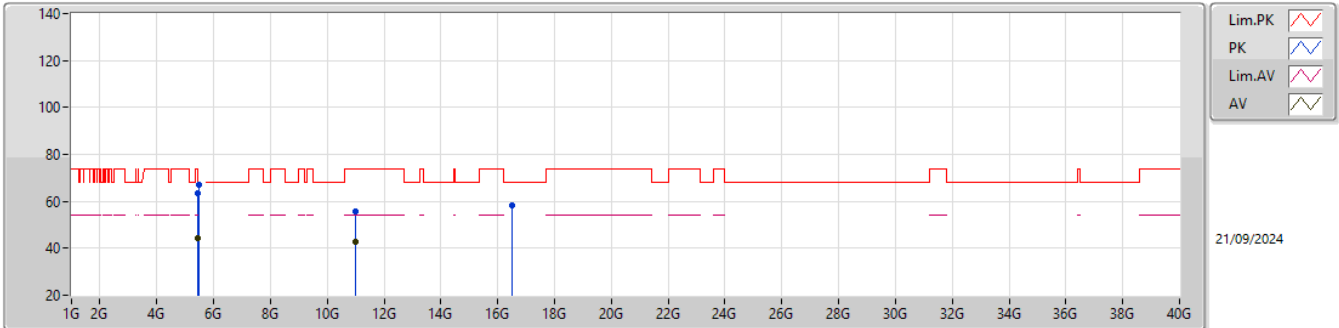

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	44.23	54.00	-9.77	43.84	3	Vertical	332	1.95	-	31.90	7.31	38.82			
PK	5.46G	63.54	74.00	-10.46	63.15	3	Vertical	332	1.95	-	31.90	7.31	38.82			
PK	5.47G	67.05	68.20	-1.15	66.66	3	Vertical	332	1.95	-	31.90	7.31	38.82			
AV	11G	42.69	54.00	-11.31	35.11	3	Vertical	260	3.10	-	40.20	9.93	42.55			
PK	11G	55.53	74.00	-18.47	47.95	3	Vertical	260	3.10	-	40.20	9.93	42.55			
PK	16.5G	58.08	68.20	-10.12	51.58	3	Vertical	227	1.00	-	40.00	12.16	45.66			

5.47-5.725GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5580MHz_TX

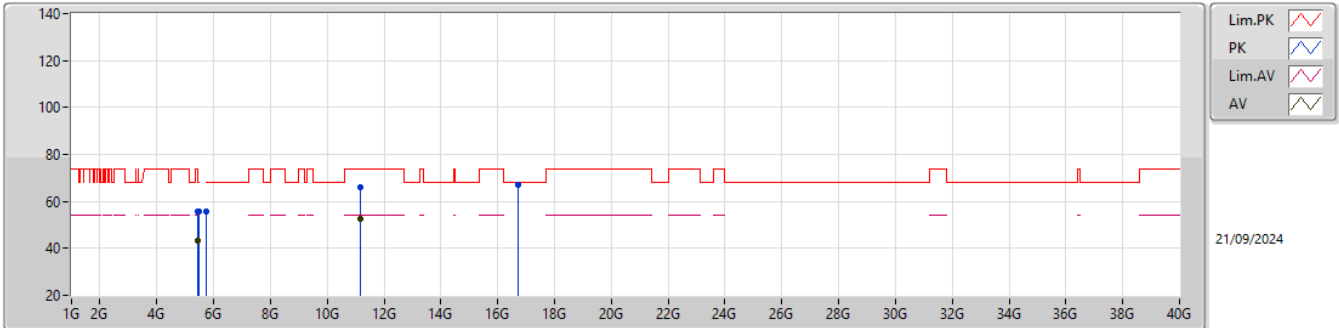

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	43.28	54.00	-10.72	42.89	3	Horizontal	25	3.34	-	31.90	7.31	38.82			
PK	5.46G	55.49	74.00	-18.51	55.10	3	Horizontal	25	3.34	-	31.90	7.31	38.82			
PK	5.47G	55.83	68.20	-12.37	55.44	3	Horizontal	25	3.34	-	31.90	7.31	38.82			
PK	5.725G	55.72	68.20	-12.48	55.13	3	Horizontal	25	3.34	-	32.05	7.38	38.84			
AV	11.16G	52.45	54.00	-1.55	45.49	3	Horizontal	155	1.69	-	39.64	9.95	42.63			
PK	11.16G	66.21	74.00	-7.79	59.25	3	Horizontal	155	1.69	-	39.64	9.95	42.63			
PK	16.74G	66.97	68.20	-1.23	59.55	3	Horizontal	165	1.95	-	41.30	12.21	46.09			

5.47-5.725GHz_802.11n HT20_Nss1,(MCS0)_1TX


5580MHz_TX

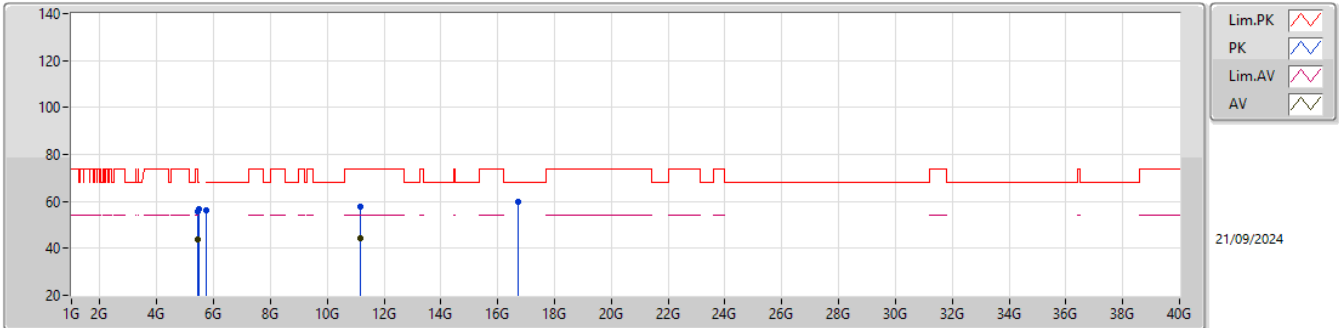

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	43.62	54.00	-10.38	43.23	3	Vertical	333	1.83	-	31.90	7.31	38.82			
PK	5.46G	55.79	74.00	-18.21	55.40	3	Vertical	333	1.83	-	31.90	7.31	38.82			
PK	5.47G	56.59	68.20	-11.61	56.20	3	Vertical	333	1.83	-	31.90	7.31	38.82			
PK	5.725G	56.11	68.20	-12.09	55.52	3	Vertical	333	1.83	-	32.05	7.38	38.84			
AV	11.16G	44.29	54.00	-9.71	37.33	3	Vertical	259	3.11	-	39.64	9.95	42.63			
PK	11.16G	57.52	74.00	-16.48	50.56	3	Vertical	259	3.11	-	39.64	9.95	42.63			
PK	16.74G	59.87	68.20	-8.33	52.45	3	Vertical	219	1.00	-	41.30	12.21	46.09			

5.47-5.725GHz_802.11n HT20_Nss1,(MCS0)_1TX


5700MHz_TX

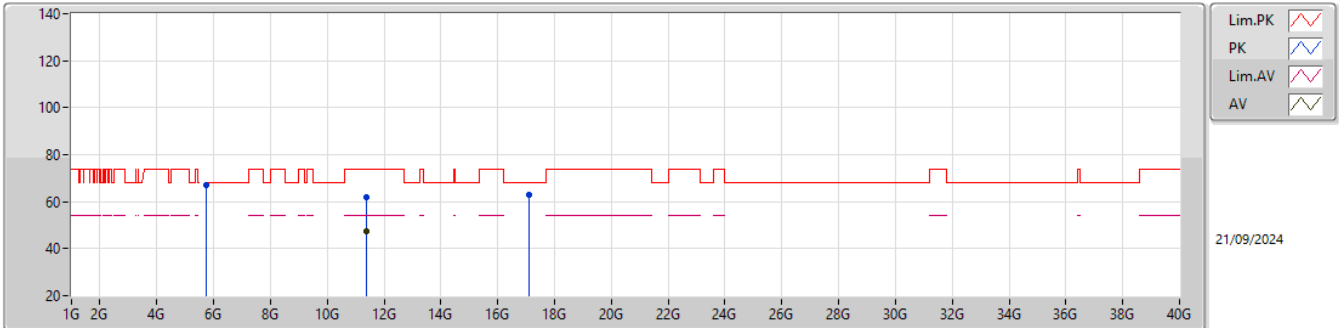

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.725G	66.87	68.20	-1.33	66.28	3	Horizontal	22	3.47	-	32.05	7.38	38.84			
AV	11.4G	47.52	54.00	-6.48	40.29	3	Horizontal	148	1.66	-	40.00	9.97	42.74			
PK	11.4G	62.10	74.00	-11.90	54.87	3	Horizontal	148	1.66	-	40.00	9.97	42.74			
PK	17.1G	62.73	68.20	-5.47	55.83	3	Horizontal	349	2.13	-	41.30	12.35	46.75			

5.47-5.725GHz_802.11n HT20_Nss1,(MCS0)_1TX


5700MHz_TX

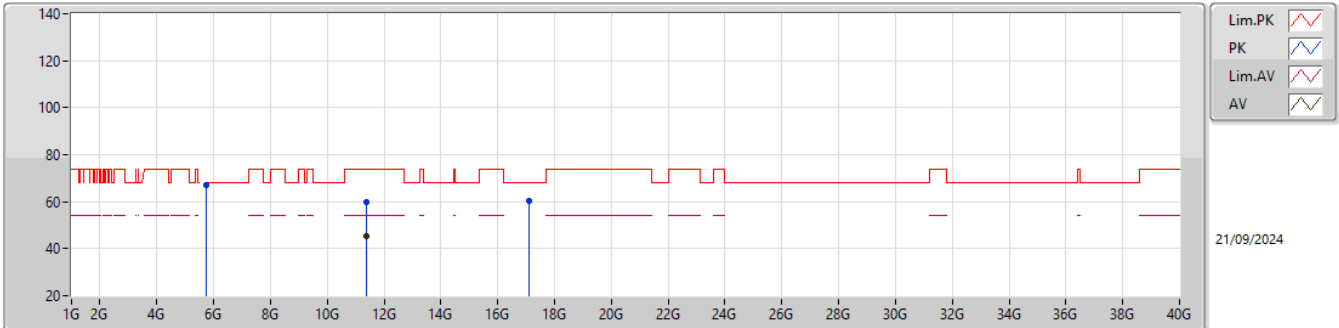

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.725G	67.05	68.20	-1.15	66.46	3	Vertical	337	1.91	-	32.05	7.38	38.84			
AV	11.4G	45.29	54.00	-8.71	38.06	3	Vertical	286	3.08	-	40.00	9.97	42.74			
PK	11.4G	59.93	74.00	-14.07	52.70	3	Vertical	286	3.08	-	40.00	9.97	42.74			
PK	17.1G	60.48	68.20	-7.72	53.58	3	Vertical	211	1.00	-	41.30	12.35	46.75			

5.47-5.725GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

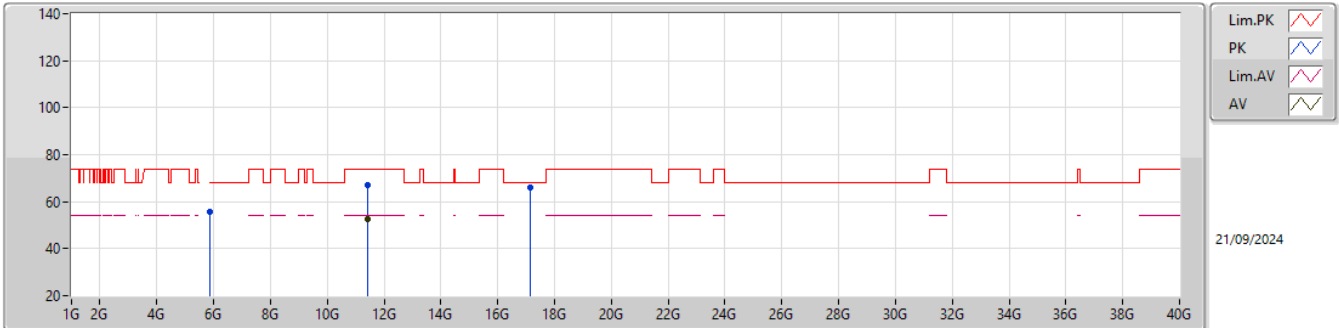

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
PK	5.85G	55.49	68.20	-12.71	54.51	3	Horizontal	26	3.65	-	32.40	7.42	38.84				
AV	11.44G	52.66	54.00	-1.34	45.45	3	Horizontal	155	2.13	-	40.00	9.97	42.76				
PK	11.44G	67.12	74.00	-6.88	59.91	3	Horizontal	115	2.13	-	40.00	9.97	42.76				
PK	17.16G	65.85	68.20	-2.35	59.30	3	Horizontal	188	1.75	-	41.02	12.40	46.87				

5.47-5.725GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5720MHz Straddle 5.47-5.725GHz_TX

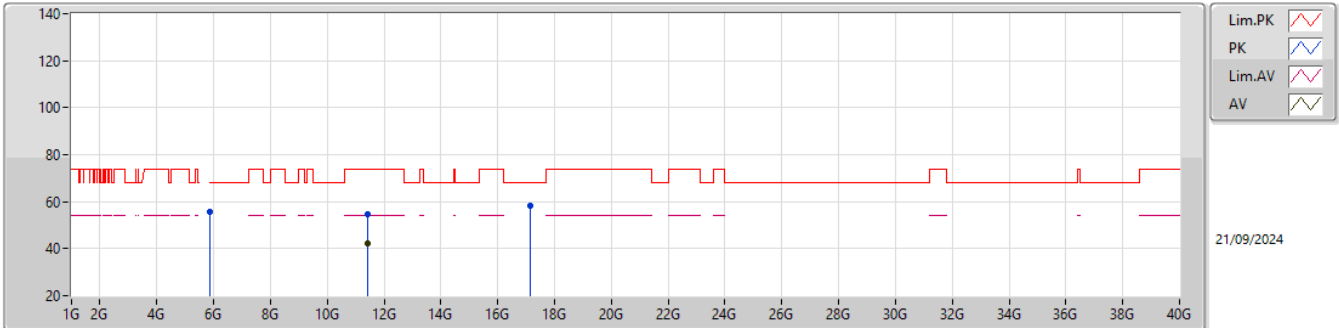

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.85G	55.82	68.20	-12.38	54.84	3	Vertical	332	2.12	-	32.40	7.42	38.84			
AV	11.44G	42.39	54.00	-11.61	35.18	3	Vertical	49	2.00	-	40.00	9.97	42.76			
PK	11.44G	54.65	74.00	-19.35	47.44	3	Vertical	49	2.00	-	40.00	9.97	42.76			
PK	17.16G	58.37	68.20	-9.83	51.82	3	Vertical	131	2.28	-	41.02	12.40	46.87			

5.725-5.85GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5745MHz_TX

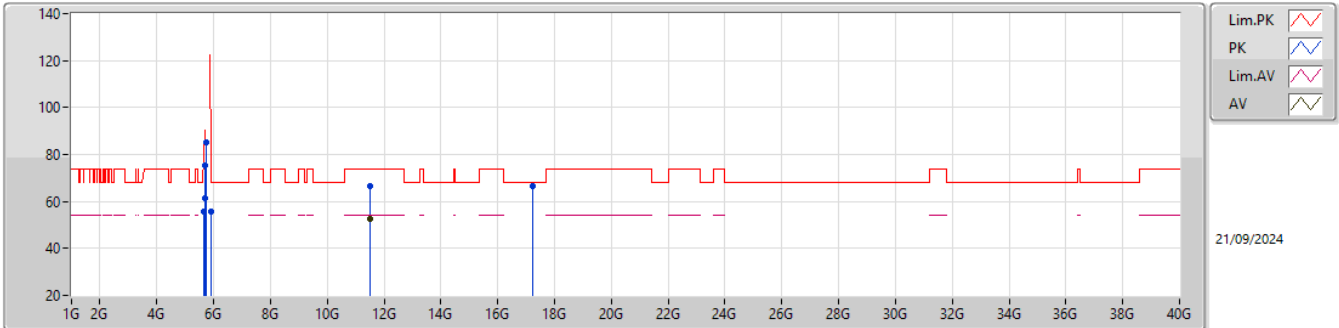

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB/m)	(dB)	(dB)			
PK	5.65G	55.84	68.20	-12.36	55.62	3	Horizontal	29	2.38	-	31.70	7.36	38.84			
PK	5.7G	61.19	105.20	-44.01	60.66	3	Horizontal	29	2.38	-	32.00	7.37	38.84			
PK	5.72G	75.47	110.80	-35.33	74.89	3	Horizontal	29	2.38	-	32.04	7.38	38.84			
PK	5.725G	85.35	122.20	-36.85	84.76	3	Horizontal	29	2.38	-	32.05	7.38	38.84			
PK	5.925G	55.81	68.20	-12.39	54.67	3	Horizontal	29	2.38	-	32.55	7.44	38.85			
AV	11.49G	52.77	54.00	-1.23	45.42	3	Horizontal	152	1.95	-	40.16	9.98	42.79			
PK	11.49G	66.49	74.00	-7.51	59.14	3	Horizontal	152	1.95	-	40.16	9.98	42.79			
PK	17.235G	66.56	68.20	-1.64	59.79	3	Horizontal	185	1.65	-	41.31	12.47	47.01			

5.725-5.85GHz_802.11n HT20_Nss1,(MCS0)_1TX


5745MHz_TX

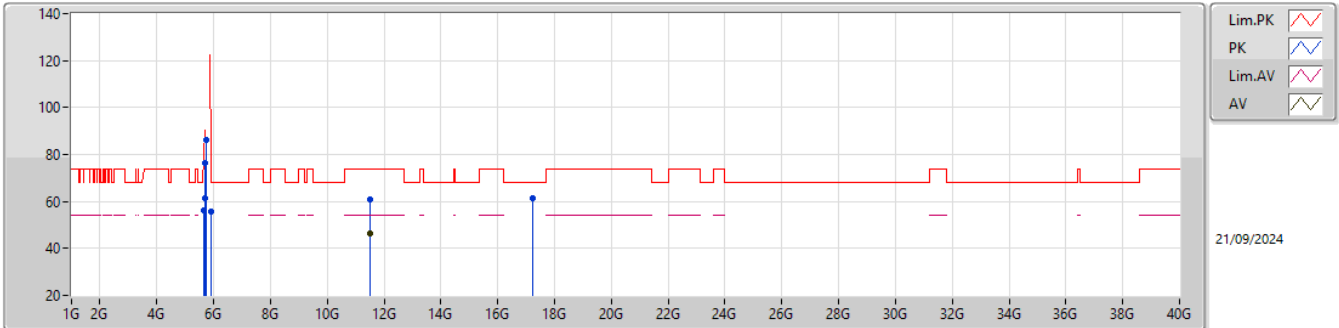

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	56.12	68.20	-12.08	55.90	3	Vertical	339	1.62	-	31.70	7.36	38.84			
PK	5.7G	61.59	105.20	-43.61	61.06	3	Vertical	339	1.62	-	32.00	7.37	38.84			
PK	5.72G	76.58	110.80	-34.22	76.00	3	Vertical	339	1.62	-	32.04	7.38	38.84			
PK	5.725G	86.21	122.20	-35.99	85.62	3	Vertical	339	1.62	-	32.05	7.38	38.84			
PK	5.925G	55.89	68.20	-12.31	54.75	3	Vertical	339	1.62	-	32.55	7.44	38.85			
AV	11.49G	46.59	54.00	-7.41	39.24	3	Vertical	278	3.18	-	40.16	9.98	42.79			
PK	11.49G	60.73	74.00	-13.27	53.38	3	Vertical	278	3.18	-	40.16	9.98	42.79			
PK	17.235G	61.52	68.20	-6.68	54.75	3	Vertical	211	3.04	-	41.31	12.47	47.01			

5.725-5.85GHz_802.11n HT20_Nss1,(MCS0)_1TX


5785MHz_TX

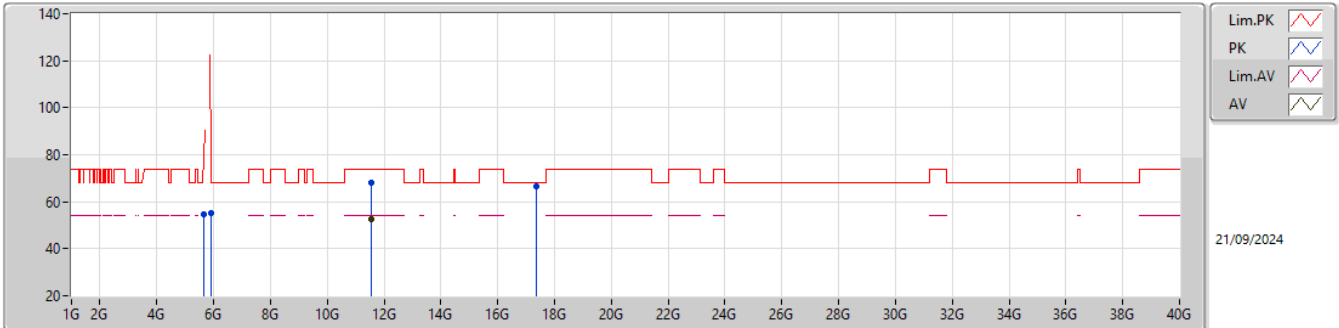

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	54.71	68.20	-13.49	54.49	3	Horizontal	26	2.33	-	31.70	7.36	38.84			
PK	5.925G	55.19	68.20	-13.01	54.05	3	Horizontal	26	2.33	-	32.55	7.44	38.85			
AV	11.57G	52.66	54.00	-1.34	45.40	3	Horizontal	145	1.95	-	40.08	9.99	42.81			
PK	11.57G	68.02	74.00	-5.98	60.76	3	Horizontal	145	1.95	-	40.08	9.99	42.81			
PK	17.355G	66.79	68.20	-1.41	59.83	3	Horizontal	191	1.65	-	41.63	12.57	47.24			

5.725-5.85GHz_802.11n HT20_Nss1,(MCS0)_1TX


5785MHz_TX

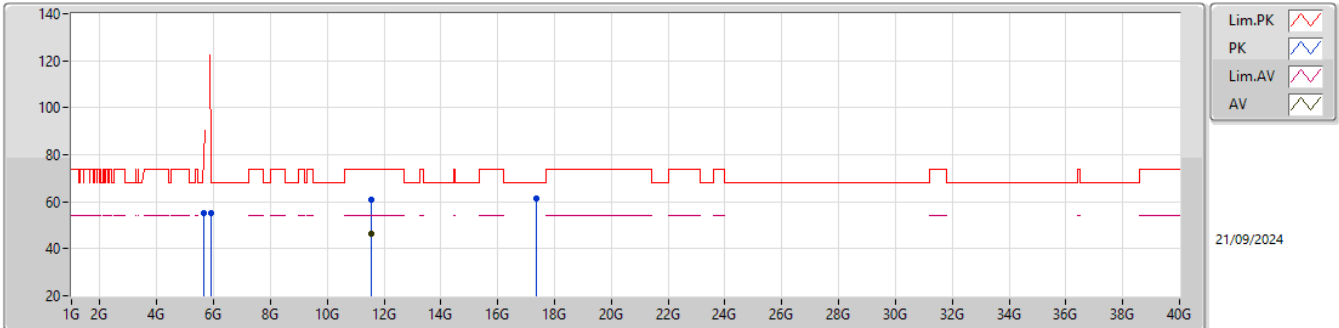

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	55.12	68.20	-13.08	54.90	3	Vertical	331	1.81	-	31.70	7.36	38.84			
PK	5.925G	55.21	68.20	-12.99	54.07	3	Vertical	331	1.81	-	32.55	7.44	38.85			
AV	11.57G	46.49	54.00	-7.51	39.23	3	Vertical	275	3.21	-	40.08	9.99	42.81			
PK	11.57G	60.85	74.00	-13.15	53.59	3	Vertical	275	3.21	-	40.08	9.99	42.81			
PK	17.355G	61.33	68.20	-6.87	54.37	3	Vertical	201	2.99	-	41.63	12.57	47.24			

5.725-5.85GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5825MHz_TX

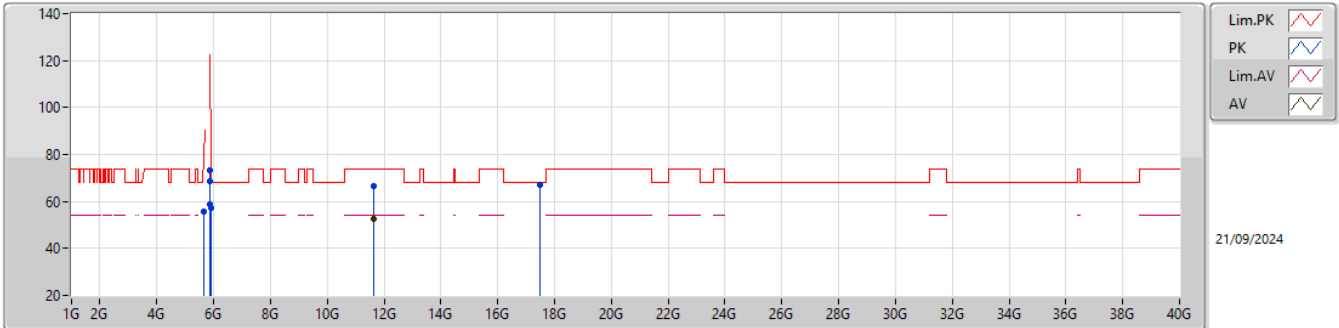

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB/m)	(dB)	(dB)			
PK	5.65G	55.69	68.20	-12.51	55.47	3	Horizontal	30	2.37	-	31.70	7.36	38.84			
PK	5.85G	73.11	122.20	-49.09	72.13	3	Horizontal	30	2.37	-	32.40	7.42	38.84			
PK	5.855G	68.59	110.80	-42.21	67.60	3	Horizontal	30	2.37	-	32.41	7.42	38.84			
PK	5.875G	58.84	105.20	-46.36	57.81	3	Horizontal	30	2.37	-	32.45	7.42	38.84			
PK	5.925G	57.32	68.20	-10.88	56.18	3	Horizontal	30	2.37	-	32.55	7.44	38.85			
AV	11.65G	52.78	54.00	-1.22	46.12	3	Horizontal	165	1.93	-	39.50	9.99	42.83			
PK	11.65G	66.31	74.00	-7.69	59.65	3	Horizontal	165	1.93	-	39.50	9.99	42.83			
PK	17.475G	66.88	68.20	-1.32	59.43	3	Horizontal	158	1.91	-	42.25	12.67	47.47			

5.725-5.85GHz_802.11n_HT20_Nss1,(MCS0)_1TX


5825MHz_TX

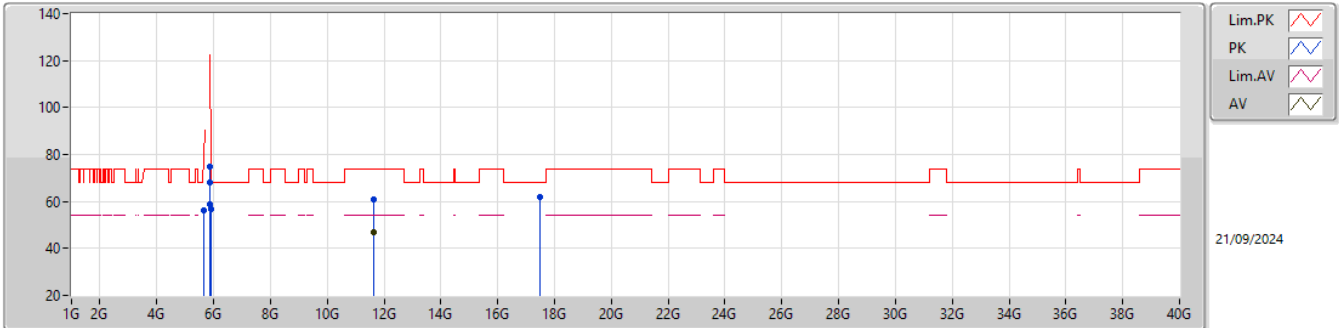

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	56.12	68.20	-12.08	55.90	3	Vertical	343	1.73	-	31.70	7.36	38.84			
PK	5.85G	74.59	122.20	-47.61	73.61	3	Vertical	343	1.73	-	32.40	7.42	38.84			
PK	5.855G	68.25	110.80	-42.55	67.26	3	Vertical	343	1.73	-	32.41	7.42	38.84			
PK	5.875G	58.55	105.20	-46.65	57.52	3	Vertical	343	1.73	-	32.45	7.42	38.84			
PK	5.925G	56.89	68.20	-11.31	55.75	3	Vertical	343	1.73	-	32.55	7.44	38.85			
AV	11.65G	46.92	54.00	-7.08	40.26	3	Vertical	277	3.26	-	39.50	9.99	42.83			
PK	11.65G	60.87	74.00	-13.13	54.21	3	Vertical	277	3.26	-	39.50	9.99	42.83			
PK	17.475G	61.66	68.20	-6.54	54.21	3	Vertical	212	3.00	-	42.25	12.67	47.47			

5.15-5.25GHz_802.11n HT40_Nss1,(MCS0)_1TX


5190MHz_TX

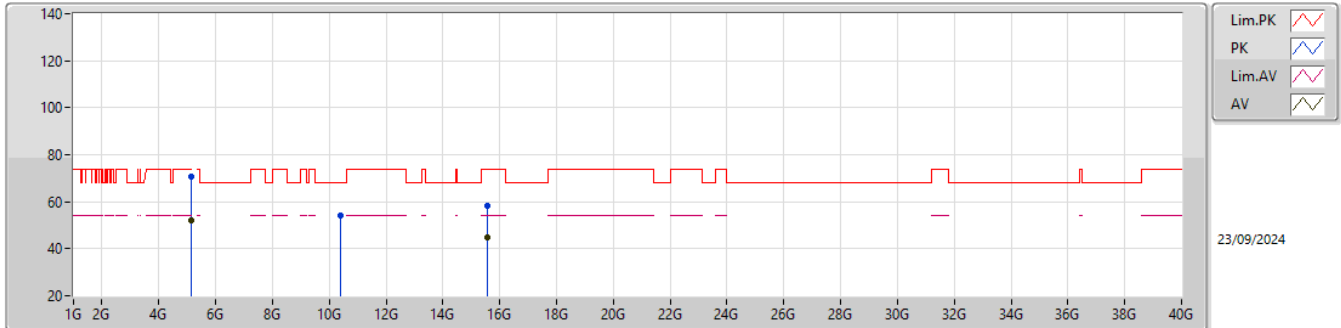

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	52.00	54.00	-2.00	51.66	3	Horizontal	31	3.78	-	32.00	7.04	38.70			
PK	5.15G	70.64	74.00	-3.36	70.30	3	Horizontal	31	3.78	-	32.00	7.04	38.70			
PK	10.38G	54.23	68.20	-13.97	46.84	3	Horizontal	137	1.00	-	39.70	9.79	42.10			
AV	15.57G	44.94	54.00	-9.06	40.97	3	Horizontal	191	1.21	-	38.30	11.32	45.65			
PK	15.57G	58.34	74.00	-15.66	54.37	3	Horizontal	191	1.21	-	38.30	11.32	45.65			

5.15-5.25GHz_802.11n HT40_Nss1,(MCS0)_1TX


5190MHz_TX

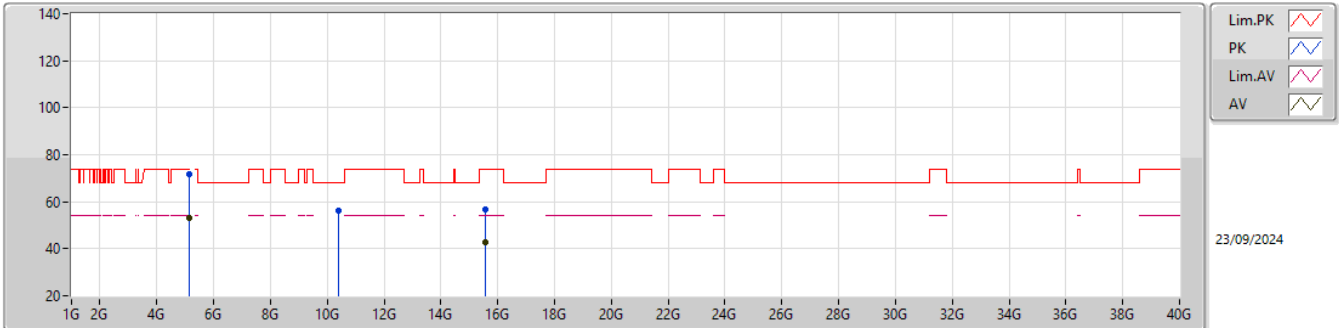

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	52.91	54.00	-1.09	52.57	3	Vertical	285	1.83	-	32.00	7.04	38.70			
PK	5.15G	71.57	74.00	-2.43	71.23	3	Vertical	285	1.83	-	32.00	7.04	38.70			
PK	10.38G	56.05	68.20	-12.15	48.66	3	Vertical	107	1.00	-	39.70	9.79	42.10			
AV	15.57G	42.86	54.00	-11.14	38.89	3	Vertical	251	1.00	-	38.30	11.32	45.65			
PK	15.57G	56.70	74.00	-17.30	52.73	3	Vertical	251	1.00	-	38.30	11.32	45.65			

5.15-5.25GHz_802.11n HT40_Nss1,(MCS0)_1TX


5230MHz_TX

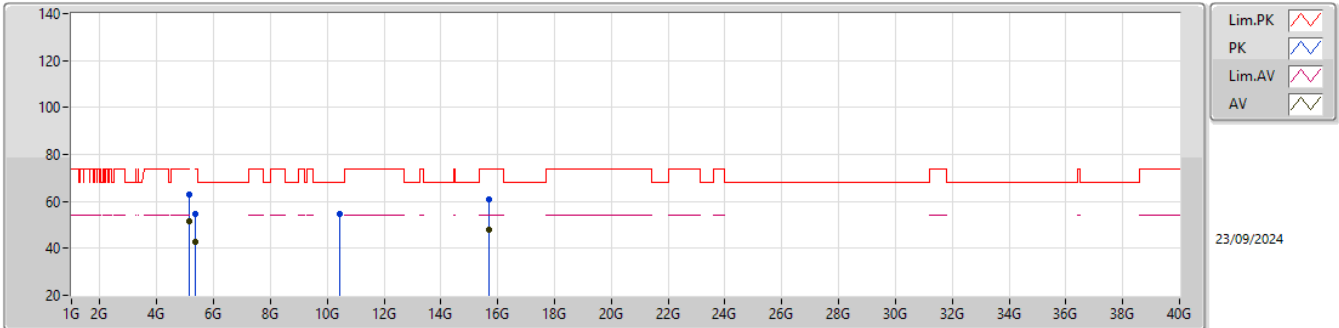

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	51.71	54.00	-2.29	51.37	3	Horizontal	38	3.76	-	32.00	7.04	38.70			
PK	5.15G	63.09	74.00	-10.91	62.75	3	Horizontal	38	3.76	-	32.00	7.04	38.70			
AV	5.35G	42.87	54.00	-11.13	43.12	3	Horizontal	39	3.65	-	31.30	7.23	38.78			
PK	5.35G	54.41	74.00	-19.59	54.66	3	Horizontal	39	3.65	-	31.30	7.23	38.78			
PK	10.46G	54.82	68.20	-13.38	47.49	3	Horizontal	139	1.00	-	39.68	9.80	42.15			
AV	15.69G	48.06	54.00	-5.94	43.88	3	Horizontal	6	1.22	-	38.34	11.43	45.59			
PK	15.69G	60.61	74.00	-13.39	56.43	3	Horizontal	6	1.22	-	38.34	11.43	45.59			

5.15-5.25GHz_802.11n HT40_Nss1,(MCS0)_1TX


5230MHz_TX

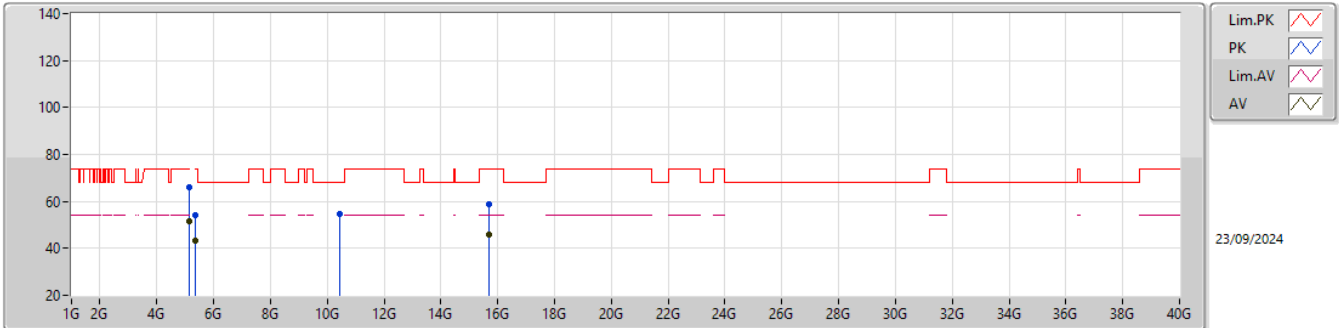

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	51.74	54.00	-2.26	51.40	3	Vertical	282	1.85	-	32.00	7.04	38.70			
PK	5.15G	66.01	74.00	-7.99	65.67	3	Vertical	282	1.85	-	32.00	7.04	38.70			
AV	5.35G	43.23	54.00	-10.77	43.48	3	Vertical	282	1.85	-	31.30	7.23	38.78			
PK	5.35G	54.33	74.00	-19.67	54.58	3	Vertical	282	1.85	-	31.30	7.23	38.78			
PK	10.46G	54.69	68.20	-13.51	47.36	3	Vertical	108	1.00	-	39.68	9.80	42.15			
AV	15.69G	46.05	54.00	-7.95	41.87	3	Vertical	248	1.00	-	38.34	11.43	45.59			
PK	15.69G	58.58	74.00	-15.42	54.40	3	Vertical	248	1.00	-	38.34	11.43	45.59			

5.25-5.35GHz_802.11n HT40_Nss1,(MCS0)_1TX


5270MHz_TX

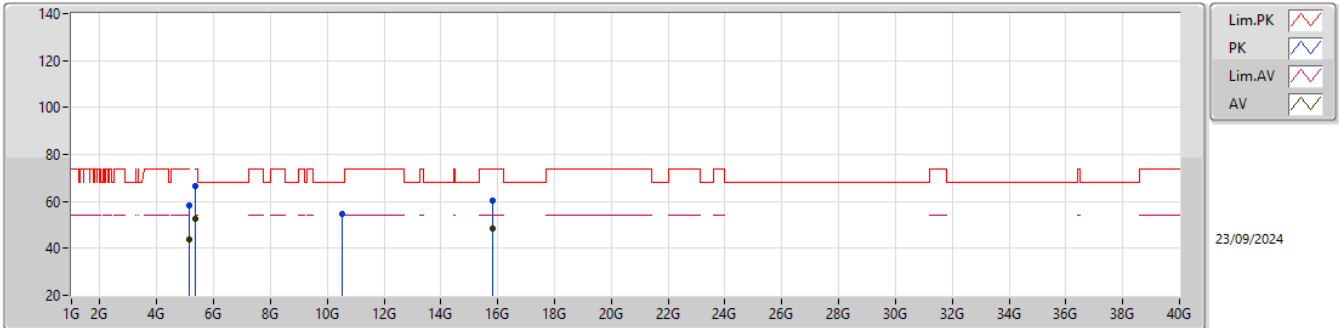

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	5.15G	43.83	54.00	-10.17	43.49	3	Horizontal	39	3.65	-	32.00	7.04	38.70				
PK	5.15G	58.42	74.00	-15.58	58.08	3	Horizontal	39	3.65	-	32.00	7.04	38.70				
AV	5.35G	52.44	54.00	-1.56	52.69	3	Horizontal	39	3.65	-	31.30	7.23	38.78				
PK	5.35G	66.59	74.00	-7.41	66.84	3	Horizontal	39	3.65	-	31.30	7.23	38.78				
PK	10.54G	54.71	68.20	-13.49	47.58	3	Horizontal	142	1.00	-	39.52	9.82	42.21				
AV	15.81G	48.32	54.00	-5.68	44.50	3	Horizontal	4	1.18	-	37.80	11.55	45.53				
PK	15.81G	60.23	74.00	-13.77	56.41	3	Horizontal	4	1.18	-	37.80	11.55	45.53				

5.25-5.35GHz_802.11n HT40_Nss1,(MCS0)_1TX


5270MHz_TX

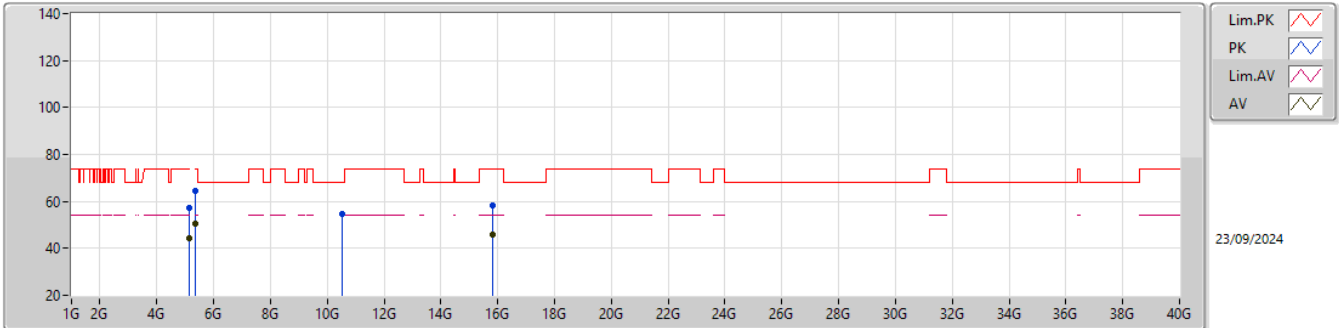

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.15G	44.55	54.00	-9.45	44.21	3	Vertical	302	1.84	-	32.00	7.04	38.70			
PK	5.15G	57.32	74.00	-16.68	56.98	3	Vertical	302	1.84	-	32.00	7.04	38.70			
AV	5.35G	50.51	54.00	-3.49	50.76	3	Vertical	272	1.69	-	31.30	7.23	38.78			
PK	5.35G	64.29	74.00	-9.71	64.54	3	Vertical	272	1.69	-	31.30	7.23	38.78			
PK	10.54G	54.62	68.20	-13.58	47.49	3	Vertical	122	1.00	-	39.52	9.82	42.21			
AV	15.81G	46.02	54.00	-7.98	42.20	3	Vertical	214	1.82	-	37.80	11.55	45.53			
PK	15.81G	58.14	74.00	-15.86	54.32	3	Vertical	214	1.82	-	37.80	11.55	45.53			

5.25-5.35GHz_802.11n HT40_Nss1,(MCS0)_1TX


5310MHz_TX

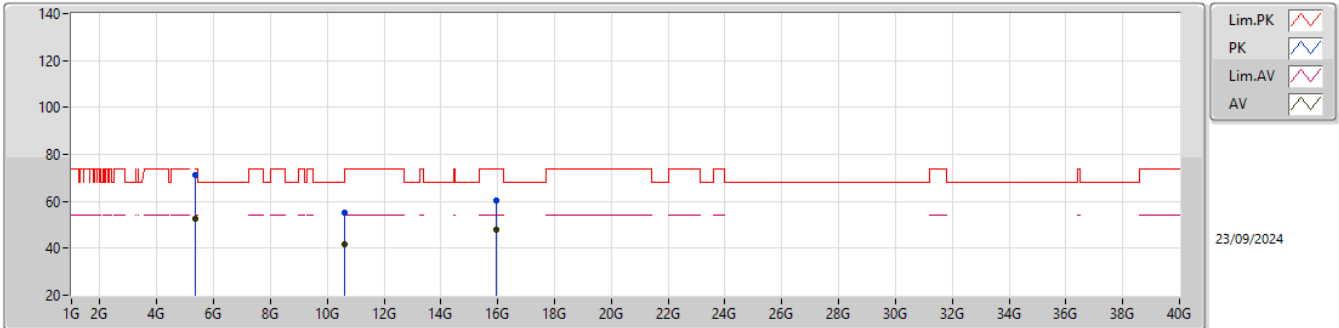

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.35G	52.73	54.00	-1.27	52.98	3	Horizontal	17	3.04	-	31.30	7.23	38.78			
PK	5.35G	71.34	74.00	-2.66	71.59	3	Horizontal	17	3.04	-	31.30	7.23	38.78			
AV	10.62G	41.74	54.00	-12.26	34.13	3	Horizontal	144	1.00	-	40.04	9.84	42.27			
PK	10.62G	55.39	74.00	-18.61	47.78	3	Horizontal	144	1.00	-	40.04	9.84	42.27			
AV	15.93G	48.15	54.00	-5.85	43.82	3	Horizontal	5	1.25	-	38.14	11.66	45.47			
PK	15.93G	60.33	74.00	-13.67	56.00	3	Horizontal	5	1.25	-	38.14	11.66	45.47			

5.25-5.35GHz_802.11n HT40_Nss1,(MCS0)_1TX


5310MHz_TX

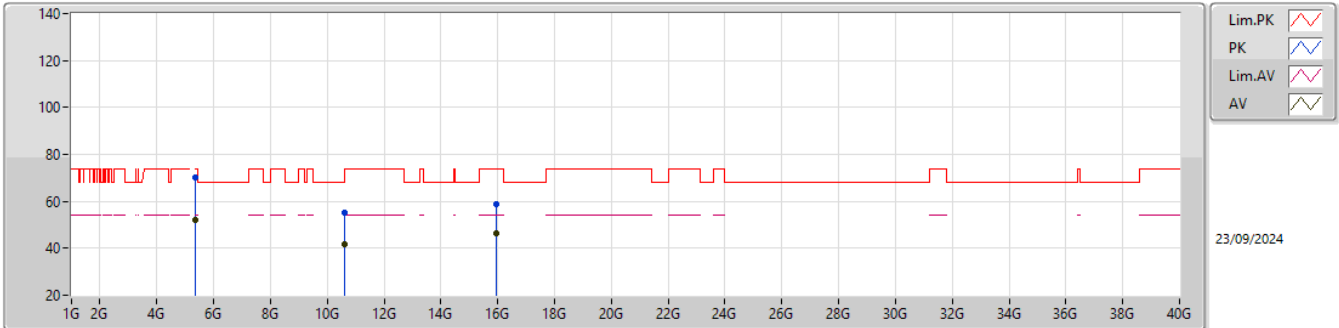

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.35G	52.01	54.00	-1.99	52.26	3	Vertical	229	2.26	-	31.30	7.23	38.78			
PK	5.35G	70.11	74.00	-3.89	70.36	3	Vertical	229	2.26	-	31.30	7.23	38.78			
AV	10.62G	41.83	54.00	-12.17	34.22	3	Vertical	124	1.00	-	40.04	9.84	42.27			
PK	10.62G	55.30	74.00	-18.70	47.69	3	Vertical	124	1.00	-	40.04	9.84	42.27			
AV	15.93G	46.25	54.00	-7.75	41.92	3	Vertical	220	1.79	-	38.14	11.66	45.47			
PK	15.93G	58.66	74.00	-15.34	54.33	3	Vertical	220	1.79	-	38.14	11.66	45.47			

5.47-5.725GHz_802.11n HT40_Nss1,(MCS0)_1TX


5510MHz_TX

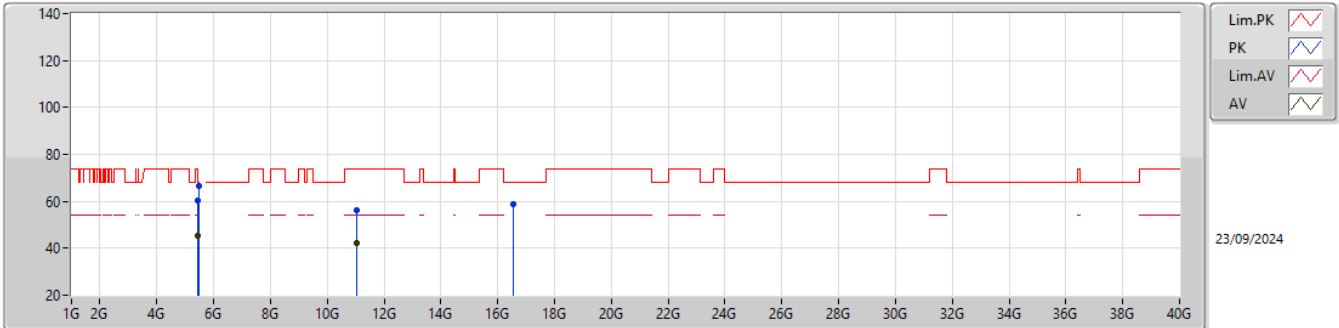

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	45.56	54.00	-8.44	45.17	3	Horizontal	31	2.84	-	31.90	7.31	38.82			
PK	5.46G	60.55	74.00	-13.45	60.16	3	Horizontal	31	2.84	-	31.90	7.31	38.82			
PK	5.47G	66.51	68.20	-1.69	66.12	3	Horizontal	31	2.84	-	31.90	7.31	38.82			
AV	11.02G	42.32	54.00	-11.68	34.75	3	Horizontal	168	1.88	-	40.20	9.93	42.56			
PK	11.02G	55.95	74.00	-18.05	48.38	3	Horizontal	168	1.88	-	40.20	9.93	42.56			
PK	16.53G	58.65	68.20	-9.55	52.37	3	Horizontal	349	1.43	-	39.82	12.17	45.71			

5.47-5.725GHz_802.11n HT40_Nss1,(MCS0)_1TX


5510MHz_TX

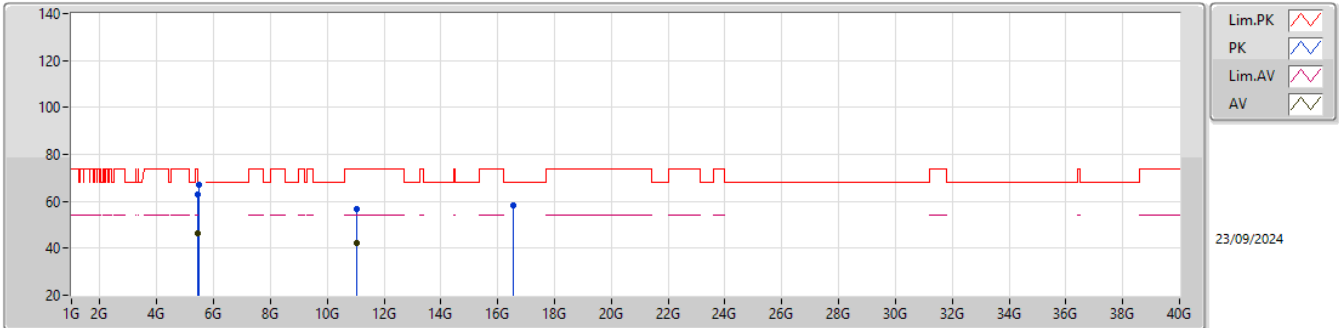

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	46.24	54.00	-7.76	45.85	3	Vertical	316	2.36	-	31.90	7.31	38.82			
PK	5.46G	62.76	74.00	-11.24	62.37	3	Vertical	316	2.36	-	31.90	7.31	38.82			
PK	5.47G	66.94	68.20	-1.26	66.55	3	Vertical	316	2.36	-	31.90	7.31	38.82			
AV	11.02G	42.36	54.00	-11.64	34.79	3	Vertical	55	1.98	-	40.20	9.93	42.56			
PK	11.02G	56.68	74.00	-17.32	49.11	3	Vertical	55	1.98	-	40.20	9.93	42.56			
PK	16.53G	58.51	68.20	-9.69	52.23	3	Vertical	122	2.30	-	39.82	12.17	45.71			

5.47-5.725GHz_802.11n HT40_Nss1,(MCS0)_1TX


5590MHz_TX

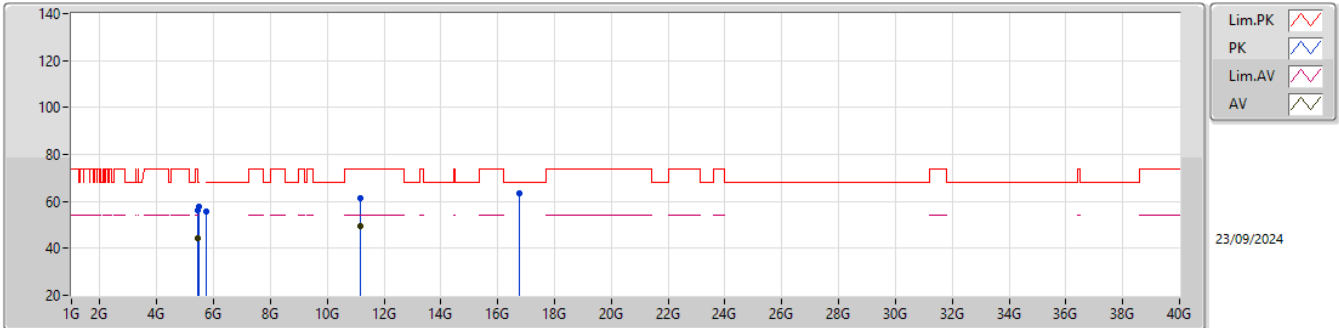

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	5.46G	44.13	54.00	-9.87	43.74	3	Horizontal	35	3.34	-	31.90	7.31	38.82				
PK	5.46G	56.14	74.00	-17.86	55.75	3	Horizontal	35	3.34	-	31.90	7.31	38.82				
PK	5.47G	57.51	68.20	-10.69	57.12	3	Horizontal	35	3.34	-	31.90	7.31	38.82				
PK	5.725G	55.81	68.20	-12.39	55.22	3	Horizontal	35	3.34	-	32.05	7.38	38.84				
AV	11.18G	49.24	54.00	-4.76	42.41	3	Horizontal	166	1.85	-	39.52	9.95	42.64				
PK	11.18G	61.51	74.00	-12.49	54.68	3	Horizontal	166	1.85	-	39.52	9.95	42.64				
PK	16.77G	63.32	68.20	-4.88	55.95	3	Horizontal	354	1.42	-	41.30	12.22	46.15				

5.47-5.725GHz_802.11n HT40_Nss1,(MCS0)_1TX


5590MHz_TX

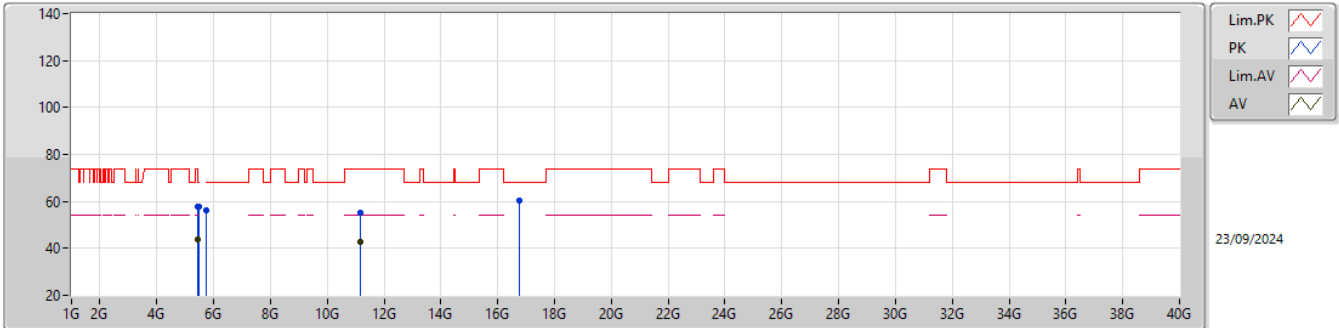

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	43.75	54.00	-10.25	43.36	3	Vertical	326	2.22	-	31.90	7.31	38.82			
PK	5.46G	57.65	74.00	-16.35	57.26	3	Vertical	326	2.22	-	31.90	7.31	38.82			
PK	5.47G	57.52	68.20	-10.68	57.13	3	Vertical	326	2.22	-	31.90	7.31	38.82			
PK	5.725G	55.95	68.20	-12.25	55.36	3	Vertical	326	2.22	-	32.05	7.38	38.84			
AV	11.18G	42.57	54.00	-11.43	35.74	3	Vertical	51	2.01	-	39.52	9.95	42.64			
PK	11.18G	55.38	74.00	-18.62	48.55	3	Vertical	51	2.01	-	39.52	9.95	42.64			
PK	16.77G	60.48	68.20	-7.72	53.11	3	Vertical	121	2.24	-	41.30	12.22	46.15			

5.47-5.725GHz_802.11n HT40_Nss1,(MCS0)_1TX


5670MHz_TX

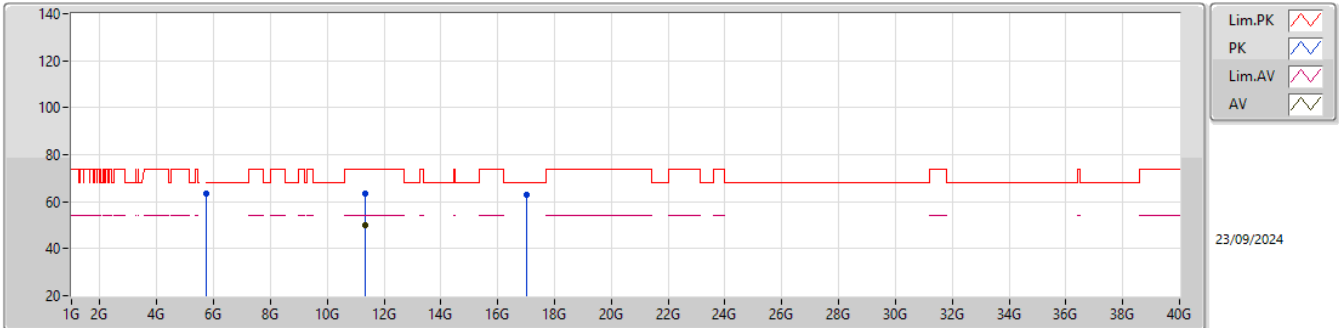

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.725G	63.21	68.20	-4.99	62.62	3	Horizontal	151	2.96	-	32.05	7.38	38.84			
AV	11.34G	50.25	54.00	-3.75	43.16	3	Horizontal	38	1.85	-	39.84	9.96	42.71			
PK	11.34G	63.44	74.00	-10.56	56.35	3	Horizontal	38	1.85	-	39.84	9.96	42.71			
PK	17.01G	63.05	68.20	-5.15	55.81	3	Horizontal	2	2.40	-	41.54	12.28	46.58			

5.47-5.725GHz_802.11n HT40_Nss1,(MCS0)_1TX


5670MHz_TX

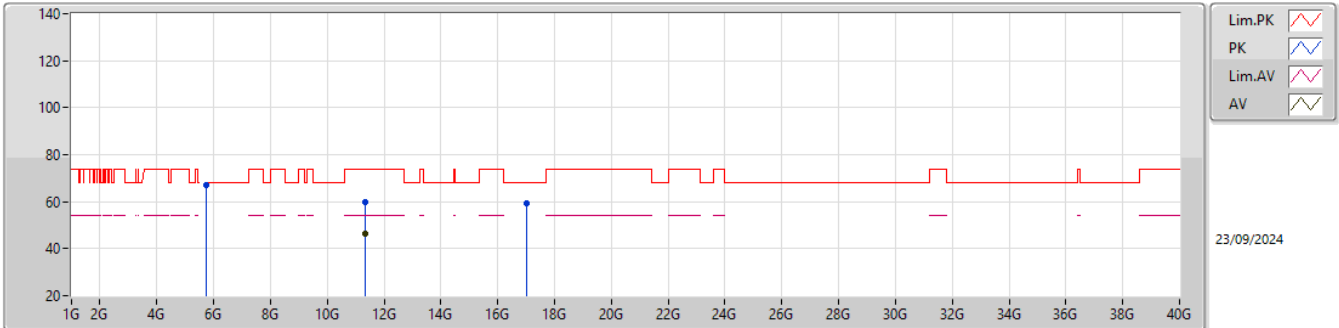

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.725G	67.12	68.20	-1.08	66.53	3	Vertical	333	2.21	-	32.05	7.38	38.84			
AV	11.34G	46.27	54.00	-7.73	39.18	3	Vertical	65	1.75	-	39.84	9.96	42.71			
PK	11.34G	60.03	74.00	-13.97	52.94	3	Vertical	65	1.75	-	39.84	9.96	42.71			
PK	17.01G	59.25	68.20	-8.95	52.01	3	Vertical	120	2.84	-	41.54	12.28	46.58			

5.47-5.725GHz_802.11n_HT40_Nss1,(MCS0)_1TX


5710MHz Straddle 5.47-5.725GHz_TX

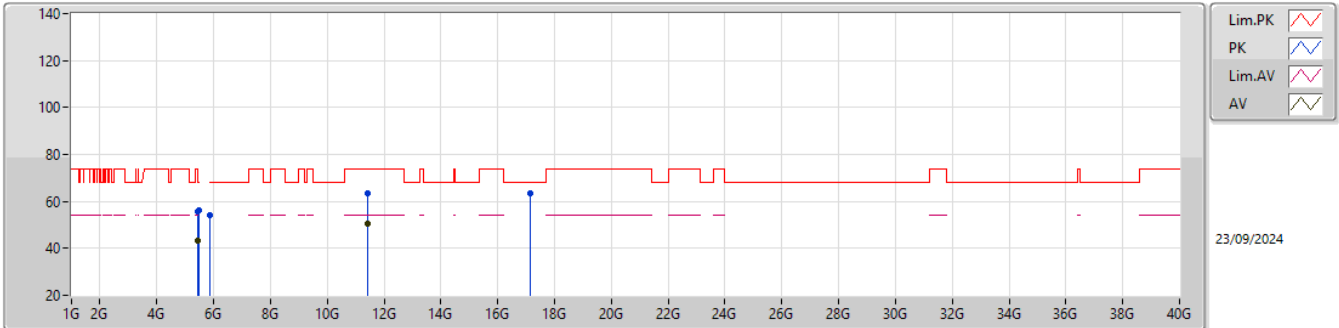

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	5.46G	43.28	54.00	-10.72	42.89	3	Horizontal	154	3.09	-	31.90	7.31	38.82				
PK	5.46G	55.49	74.00	-18.51	55.10	3	Horizontal	154	3.09	-	31.90	7.31	38.82				
PK	5.47G	56.17	68.20	-12.03	55.78	3	Horizontal	154	3.09	-	31.90	7.31	38.82				
PK	5.85G	53.88	68.20	-14.32	52.90	3	Horizontal	154	3.09	-	32.40	7.42	38.84				
AV	11.42G	50.73	54.00	-3.27	43.51	3	Horizontal	34	1.87	-	40.00	9.97	42.75				
PK	11.42G	63.52	74.00	-10.48	56.30	3	Horizontal	34	1.87	-	40.00	9.97	42.75				
PK	17.13G	63.21	68.20	-4.99	56.52	3	Horizontal	6	2.43	-	41.12	12.38	46.81				

5.47-5.725GHz_802.11n_HT40_Nss1,(MCS0)_1TX


5710MHz Straddle 5.47-5.725GHz_TX

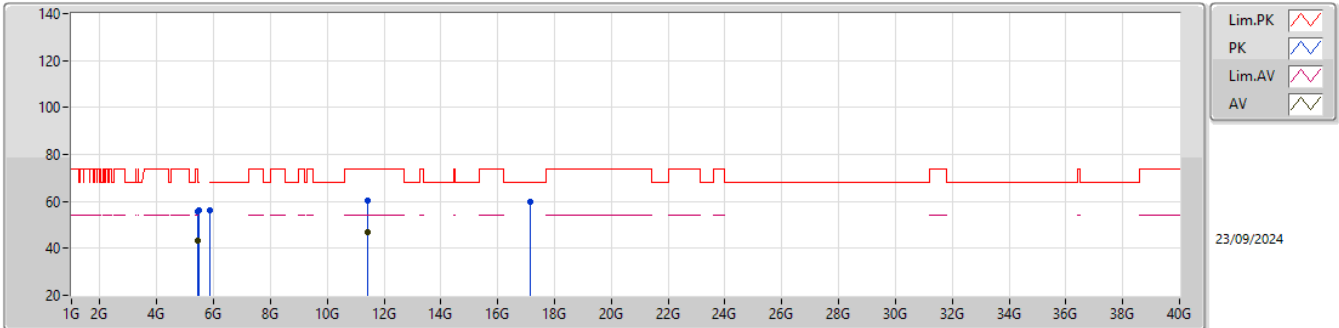

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.46G	43.38	54.00	-10.62	42.99	3	Vertical	282	2.33	-	31.90	7.31	38.82			
PK	5.46G	55.89	74.00	-18.11	55.50	3	Vertical	282	2.33	-	31.90	7.31	38.82			
PK	5.47G	56.28	68.20	-11.92	55.89	3	Vertical	282	2.33	-	31.90	7.31	38.82			
PK	5.85G	56.45	68.20	-11.75	55.47	3	Vertical	282	2.33	-	32.40	7.42	38.84			
AV	11.42G	46.73	54.00	-7.27	39.51	3	Vertical	64	1.77	-	40.00	9.97	42.75			
PK	11.42G	60.58	74.00	-13.42	53.36	3	Vertical	64	1.77	-	40.00	9.97	42.75			
PK	17.13G	59.77	68.20	-8.43	53.08	3	Vertical	116	2.97	-	41.12	12.38	46.81			

5.725-5.85GHz_802.11n HT40_Nss1,(MCS0)_1TX


5755MHz_TX

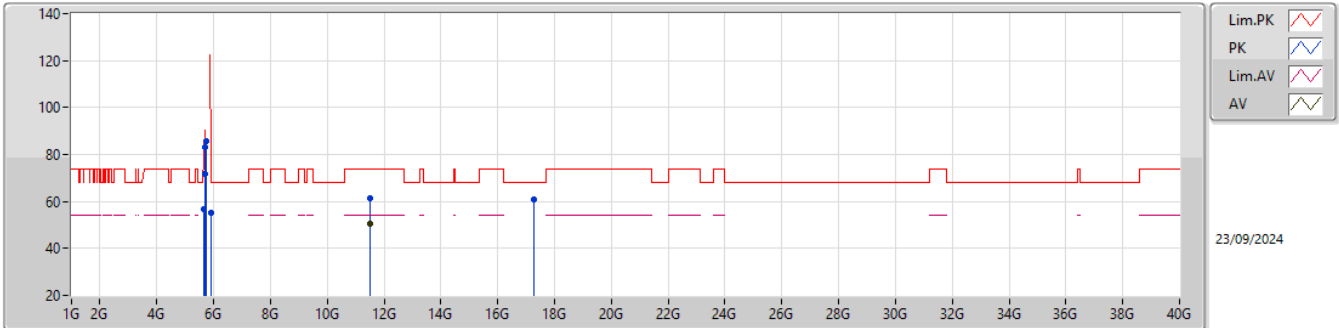

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	56.73	68.20	-11.47	56.51	3	Horizontal	35	2.49	-	31.70	7.36	38.84			
PK	5.7G	71.55	105.20	-33.65	71.02	3	Horizontal	35	2.49	-	32.00	7.37	38.84			
PK	5.72G	83.06	110.80	-27.74	82.48	3	Horizontal	35	2.49	-	32.04	7.38	38.84			
PK	5.725G	85.59	122.20	-36.61	85.00	3	Horizontal	35	2.49	-	32.05	7.38	38.84			
PK	5.925G	55.34	68.20	-12.86	54.20	3	Horizontal	35	2.49	-	32.55	7.44	38.85			
AV	11.51G	50.47	54.00	-3.53	43.08	3	Horizontal	151	1.86	-	40.20	9.98	42.79			
PK	11.51G	61.58	74.00	-12.42	54.19	3	Horizontal	151	1.86	-	40.20	9.98	42.79			
PK	17.265G	61.03	68.20	-7.17	54.21	3	Horizontal	189	1.34	-	41.40	12.49	47.07			

5.725-5.85GHz_802.11n HT40_Nss1,(MCS0)_1TX


5755MHz_TX

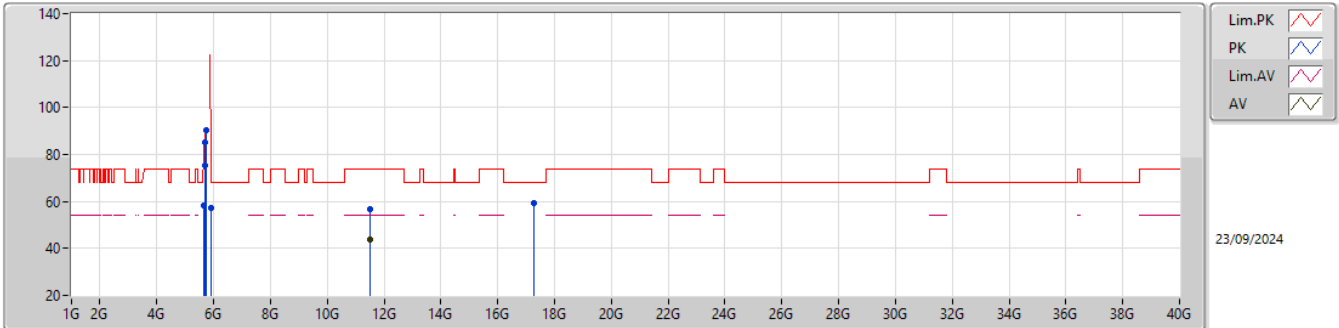

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	58.42	68.20	-9.78	58.20	3	Vertical	326	2.34	-	31.70	7.36	38.84			
PK	5.7G	75.17	105.20	-30.03	74.64	3	Vertical	326	2.34	-	32.00	7.37	38.84			
PK	5.72G	85.25	110.80	-25.55	84.67	3	Vertical	326	2.34	-	32.04	7.38	38.84			
PK	5.725G	90.10	122.20	-32.10	89.51	3	Vertical	326	2.34	-	32.05	7.38	38.84			
PK	5.925G	57.03	68.20	-11.17	55.89	3	Vertical	326	2.34	-	32.55	7.44	38.85			
AV	11.51G	43.84	54.00	-10.16	36.45	3	Vertical	270	2.51	-	40.20	9.98	42.79			
PK	11.51G	56.77	74.00	-17.23	49.38	3	Vertical	270	2.51	-	40.20	9.98	42.79			
PK	17.265G	59.25	68.20	-8.95	52.43	3	Vertical	109	3.14	-	41.40	12.49	47.07			

5.725-5.85GHz_802.11n HT40_Nss1,(MCS0)_1TX


5795MHz_TX

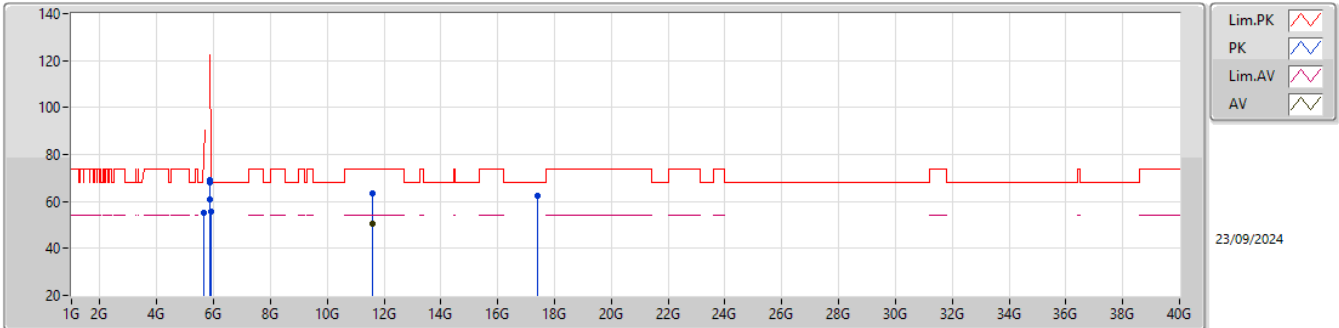

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	55.31	68.20	-12.89	55.09	3	Horizontal	233	1.52	-	31.70	7.36	38.84			
PK	5.85G	69.24	122.20	-52.96	68.26	3	Horizontal	233	1.52	-	32.40	7.42	38.84			
PK	5.855G	68.21	110.80	-42.59	67.22	3	Horizontal	233	1.52	-	32.41	7.42	38.84			
PK	5.875G	60.89	105.20	-44.31	59.86	3	Horizontal	233	1.52	-	32.45	7.42	38.84			
PK	5.925G	55.84	68.20	-12.36	54.70	3	Horizontal	233	1.52	-	32.55	7.44	38.85			
AV	11.59G	50.43	54.00	-3.57	43.29	3	Horizontal	152	1.80	-	39.96	9.99	42.81			
PK	11.59G	63.52	74.00	-10.48	56.38	3	Horizontal	152	1.80	-	39.96	9.99	42.81			
PK	17.385G	62.19	68.20	-6.01	55.09	3	Horizontal	192	2.33	-	41.81	12.59	47.30			

5.725-5.85GHz_802.11n_HT40_Nss1,(MCS0)_1TX

5795MHz_TX

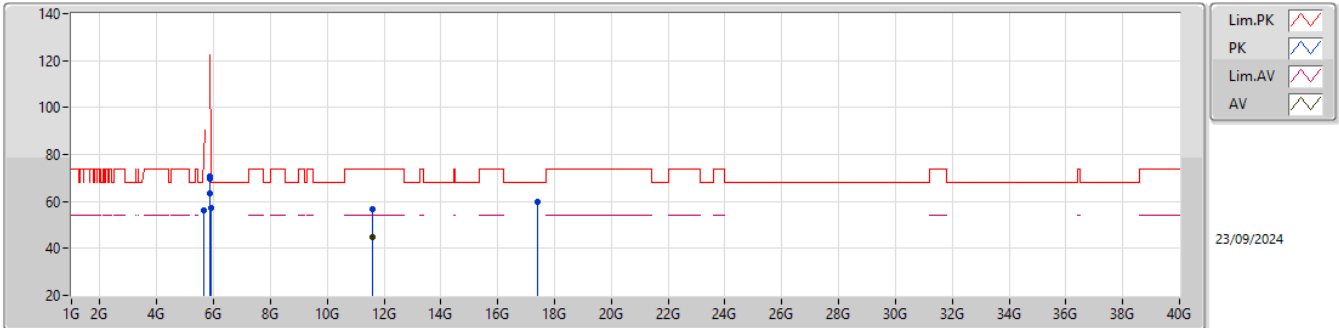

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.65G	56.01	68.20	-12.19	55.79	3	Vertical	335	2.27	-	31.70	7.36	38.84			
PK	5.85G	70.82	122.20	-51.38	69.84	3	Vertical	335	2.27	-	32.40	7.42	38.84			
PK	5.855G	69.72	110.80	-41.08	68.73	3	Vertical	335	2.27	-	32.41	7.42	38.84			
PK	5.875G	63.66	105.20	-41.54	62.63	3	Vertical	335	2.27	-	32.45	7.42	38.84			
PK	5.925G	57.22	68.20	-10.98	56.08	3	Vertical	335	2.27	-	32.55	7.44	38.85			
AV	11.59G	44.72	54.00	-9.28	37.58	3	Vertical	279	3.02	-	39.96	9.99	42.81			
PK	11.59G	56.96	74.00	-17.04	49.82	3	Vertical	279	3.02	-	39.96	9.99	42.81			
PK	17.385G	59.73	68.20	-8.47	52.63	3	Vertical	213	2.96	-	41.81	12.59	47.30			

Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-5.17	-4.65	-4.80	-5.00
T20°CVmin	-5.04	-4.61	-4.99	-4.62
T70°CVnom	-16.23	-15.81	-15.99	-15.92
T60°CVnom	-14.04	-13.88	-14.14	-13.17
T50°CVnom	-11.72	-11.02	-11.51	-11.56
T40°CVnom	-10.79	-10.11	-10.37	-10.33
T30°CVnom	-7.75	-7.88	-7.08	-7.56
T20°CVnom	-5.66	-5.20	-5.80	-4.93
T10°CVnom	-3.42	-2.64	-2.67	-3.79
T0°CVnom	-1.04	-0.96	-0.94	-1.37
T-10°CVnom	0.19	0.68	0.00	0.30
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 70		Tmin [°C]: -10	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-4.74	-4.10	-4.74	-4.81
T20°CVmin	-4.62	-5.10	-4.31	-4.72
T70°CVnom	-14.87	-14.16	-14.21	-14.13
T60°CVnom	-12.86	-13.04	-12.29	-12.90
T50°CVnom	-10.73	-11.04	-10.50	-10.78
T40°CVnom	-9.89	-9.53	-9.37	-10.02
T30°CVnom	-7.10	-6.89	-7.17	-6.86
T20°CVnom	-5.19	-5.01	-4.38	-4.67
T10°CVnom	-3.13	-3.26	-2.81	-2.82
T0°CVnom	-0.95	-1.11	-0.96	-1.10
T-10°CVnom	0.17	0.07	0.28	0.26
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 70		Tmin [°C]: -10	




Modulation Mode	HT40	Test Freq. (MHz)	5590
Power Phase	Line		

Test by : Joe Liao_AN

Temperature: 24°C

Humidity: 64%

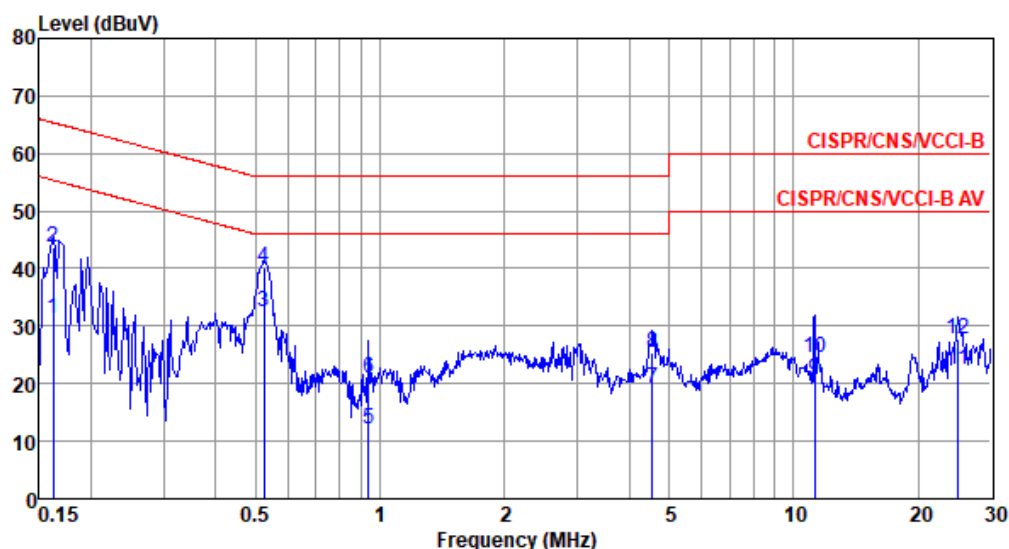

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.162	31.37	55.34	-23.97	21.65	9.65	0.07	0.00	Average
2	0.162	43.77	65.34	-21.57	34.05	9.65	0.07	0.00	QP
3*	0.524	32.37	46.00	-13.63	22.65	9.64	0.08	0.00	Average
4	0.524	40.25	56.00	-15.75	30.53	9.64	0.08	0.00	QP
5	0.938	11.98	46.00	-34.02	2.24	9.65	0.09	0.00	Average
6	0.938	20.85	56.00	-35.15	11.11	9.65	0.09	0.00	QP
7	4.549	19.28	46.00	-26.72	9.40	9.68	0.20	0.00	Average
8	4.549	25.27	56.00	-30.73	15.39	9.68	0.20	0.00	QP
9	11.257	20.74	50.00	-29.26	10.65	9.71	0.38	0.00	Average
10	11.257	24.41	60.00	-35.59	14.32	9.71	0.38	0.00	QP
11	25.055	22.49	50.00	-27.51	12.29	9.66	0.54	0.00	Average
12	25.055	27.87	60.00	-32.13	17.67	9.66	0.54	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mod	HT40	Test Freq. (MHz)	5590
Power Phase	Neutral		

Test by : Joe Liao_AN

Temperature: 24°C

Humidity: 64%

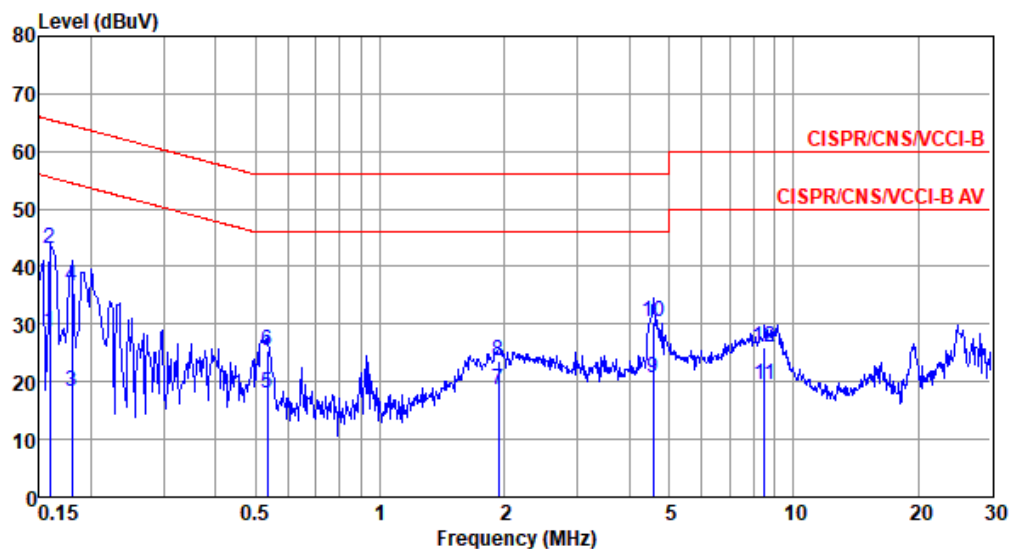

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	28.64	55.52	-26.88	18.90	9.66	0.08	0.00	Average
2*	0.159	43.22	65.52	-22.30	33.48	9.66	0.08	0.00	QP
3	0.180	18.23	54.50	-36.27	8.51	9.65	0.07	0.00	Average
4	0.180	36.52	64.50	-27.98	26.80	9.65	0.07	0.00	QP
5	0.535	17.89	46.00	-28.11	8.17	9.64	0.08	0.00	Average
6	0.535	25.38	56.00	-30.62	15.66	9.64	0.08	0.00	QP
7	1.939	18.68	46.00	-27.32	8.91	9.66	0.11	0.00	Average
8	1.939	23.70	56.00	-32.30	13.93	9.66	0.11	0.00	QP
9	4.574	20.76	46.00	-25.24	10.87	9.69	0.20	0.00	Average
10	4.574	30.36	56.00	-25.64	20.47	9.69	0.20	0.00	QP
11	8.501	19.61	50.00	-30.39	9.56	9.73	0.32	0.00	Average
12	8.501	26.01	60.00	-33.99	15.96	9.73	0.32	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mod	HT40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Joe Liao_AN

Temperature: 24°C

Humidity: 64%

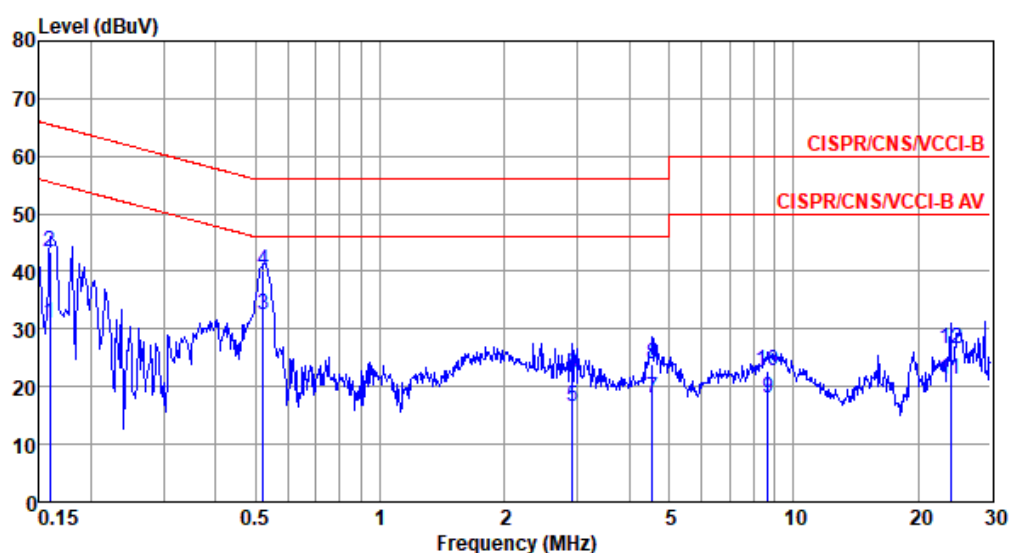

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	30.95	55.52	-24.57	21.22	9.65	0.08	0.00	Average
2	0.159	43.28	65.52	-22.24	33.55	9.65	0.08	0.00	QP
3*	0.521	32.37	46.00	-13.63	22.65	9.64	0.08	0.00	Average
4	0.521	40.20	56.00	-15.80	30.48	9.64	0.08	0.00	QP
5	2.915	16.62	46.00	-29.38	6.80	9.67	0.15	0.00	Average
6	2.915	22.21	56.00	-33.79	12.39	9.67	0.15	0.00	QP
7	4.549	17.91	46.00	-28.09	8.03	9.68	0.20	0.00	Average
8	4.549	23.97	56.00	-32.03	14.09	9.68	0.20	0.00	QP
9	8.683	18.01	50.00	-31.99	7.99	9.70	0.32	0.00	Average
10	8.683	22.71	60.00	-37.29	12.69	9.70	0.32	0.00	QP
11	24.015	21.31	50.00	-28.69	11.11	9.67	0.53	0.00	Average
12	24.015	26.52	60.00	-33.48	16.32	9.67	0.53	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Modulation Mod	HT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Joe Liao_AN

Temperature: 24°C

Humidity: 64%

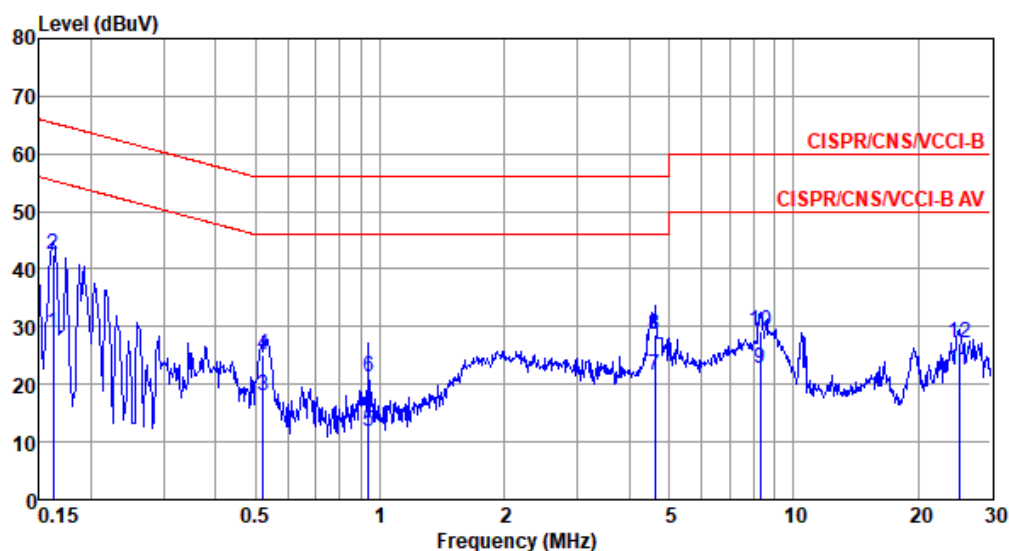

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.162	28.97	55.34	-26.37	19.24	9.66	0.07	0.00	Average
2*	0.162	42.64	65.34	-22.70	32.91	9.66	0.07	0.00	QP
3	0.521	17.87	46.00	-28.13	8.15	9.64	0.08	0.00	Average
4	0.521	25.17	56.00	-30.83	15.45	9.64	0.08	0.00	QP
5	0.938	11.85	46.00	-34.15	2.11	9.65	0.09	0.00	Average
6	0.938	21.36	56.00	-34.64	11.62	9.65	0.09	0.00	QP
7	4.622	21.48	46.00	-24.52	11.58	9.69	0.21	0.00	Average
8	4.622	28.49	56.00	-27.51	18.59	9.69	0.21	0.00	QP
9	8.323	22.72	50.00	-27.28	12.67	9.73	0.32	0.00	Average
10	8.323	29.15	60.00	-30.85	19.10	9.73	0.32	0.00	QP
11	25.188	22.46	50.00	-27.54	12.07	9.85	0.54	0.00	Average
12	25.188	27.20	60.00	-32.80	16.81	9.85	0.54	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).