

INDEX OF SUBMITTED MEASURED DATA


EXHIBIT 6G (Revised) – Conducted Spurious Emissions (12 Tables):

- 6G-1: Hi-Power Harmonic of Carrier 450.025 MHz, 25 kHz Channel Spacing
- 6G-2: Hi-Power Harmonic of Carrier 481.050 MHz, 25 kHz Channel Spacing
- 6G-3: Hi-Power Harmonic of Carrier 511.975 MHz, 25 kHz Channel Spacing
- 6G-4: Lo-Power Harmonic of Carrier 450.025 MHz, 25 kHz Channel Spacing
- 6G-5: Lo-Power Harmonic of Carrier 481.050 MHz, 25 kHz Channel Spacing
- 6G-6: Lo-Power Harmonic of Carrier 511.975 MHz, 25 kHz Channel Spacing
- 6G-7: Hi-Power Harmonic of Carrier 450.025 MHz, 12.5 kHz Channel Spacing
- 6G-8: Hi-Power Harmonic of Carrier 481.050 MHz, 12.5 kHz Channel Spacing
- 6G-9: Hi-Power Harmonic of Carrier 511.975 MHz, 12.5 kHz Channel Spacing
- 6G-10: Lo-Power Harmonic of Carrier 450.025 MHz, 12.5 kHz Channel Spacing
- 6G-11: Lo-Power Harmonic of Carrier 481.050 MHz, 12.5 kHz Channel Spacing
- 6G-12: Lo-Power Harmonic of Carrier 511.975 MHz, 12.5 kHz Channel Spacing


EXHIBIT 6H (Revised) – Radiated Spurious Emissions (12 Graphs):

- 6H-1: Hi-Power, 450.025 MHz, 25 kHz Channel Spacing
& Hi-Power, 481.050 MHz, 25 kHz Channel Spacing
- 6H-2: Hi-Power, 511.975 MHz, 25 kHz Channel Spacing
- 6H-3: Lo-Power, 450.025 MHz, 25 kHz Channel Spacing
& Lo-Power, 481.050 MHz, 25 kHz Channel Spacing
- 6H-4: Lo-Power, 511.975 MHz, 25 kHz Channel Spacing
- 6H-5: Hi-Power, 450.025 MHz, 12.5 kHz Channel Spacing
& Hi-Power, 481.050 MHz, 12.5 kHz Channel Spacing
- 6H-6: Hi-Power, 511.975 MHz, 12.5 kHz Channel Spacing
- 6H-7: Lo-Power, 450.025 MHz, 12.5 kHz Channel Spacing
& Lo-Power, 481.050 MHz, 12.5 kHz Channel Spacing
- 6H-8: Lo-Power, 511.975 MHz, 12.5 kHz Channel Spacing


EXHIBIT 6G (Revised)
Transmitter Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

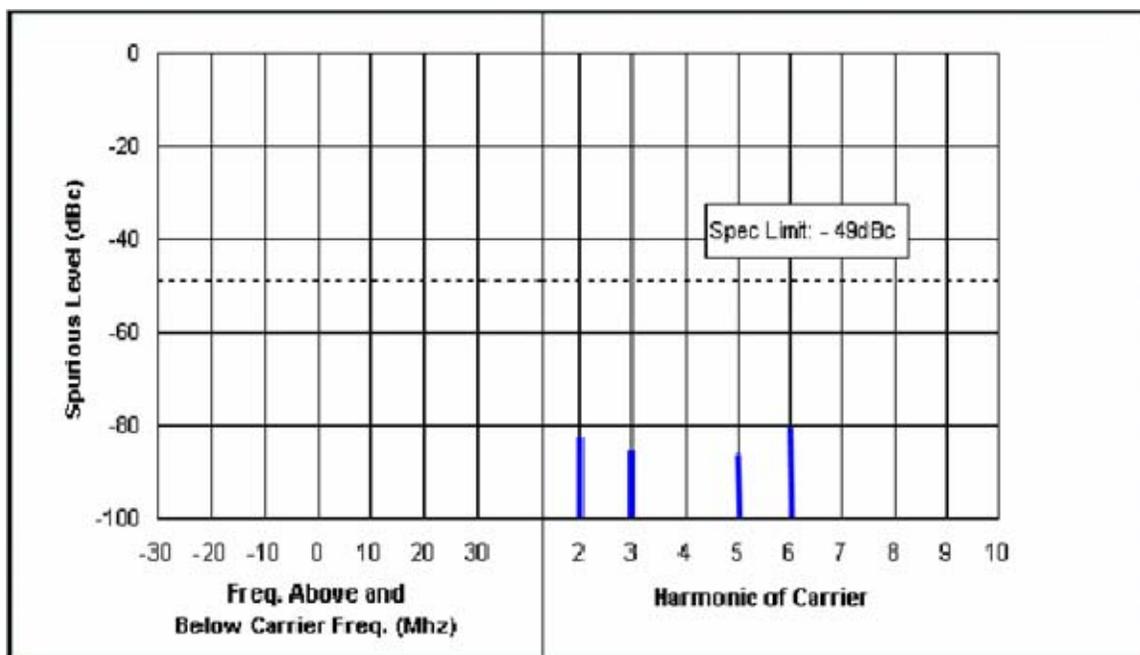


6G-1: Hi-Power Harmonic of Carrier 450.025 MHz, 25 kHz Channel Spacing

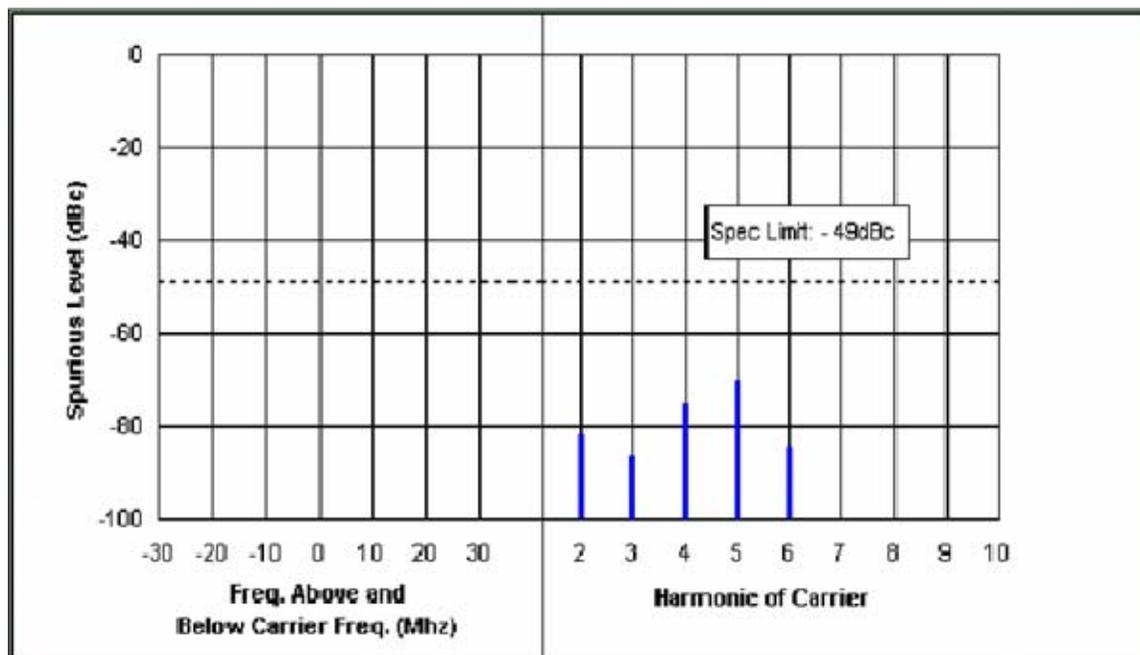


6G-2: Hi-Power Harmonic of Carrier 481.050 MHz, 25 kHz Channel Spacing

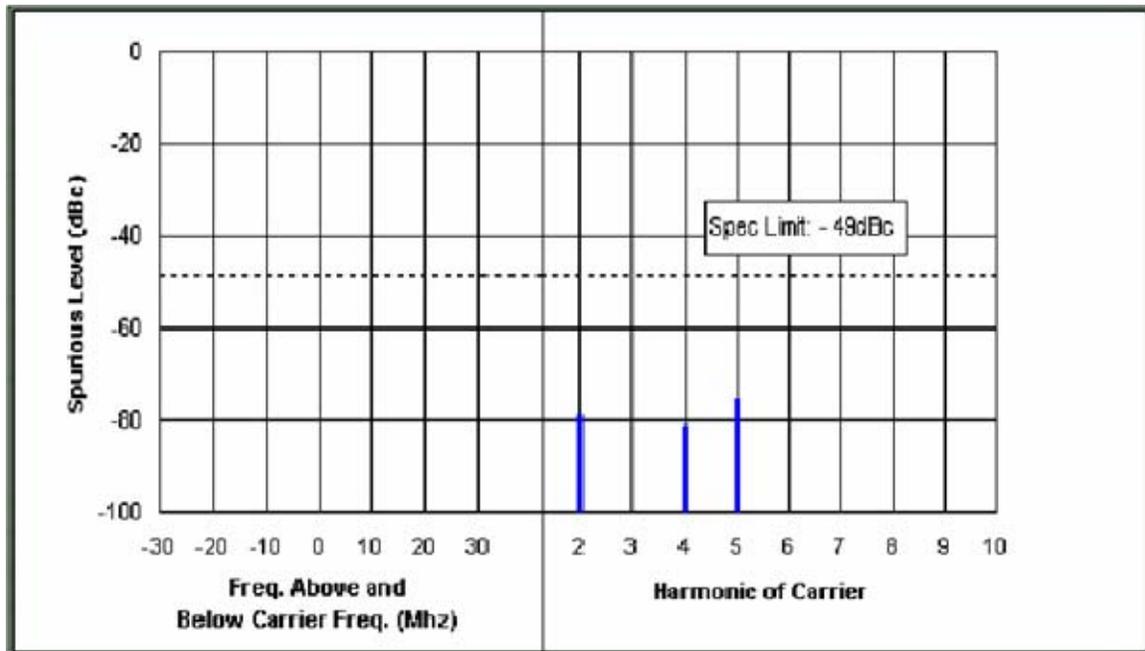


6G-3: Hi-Power Harmonic of Carrier 511.975 MHz, 25 kHz Channel Spacing

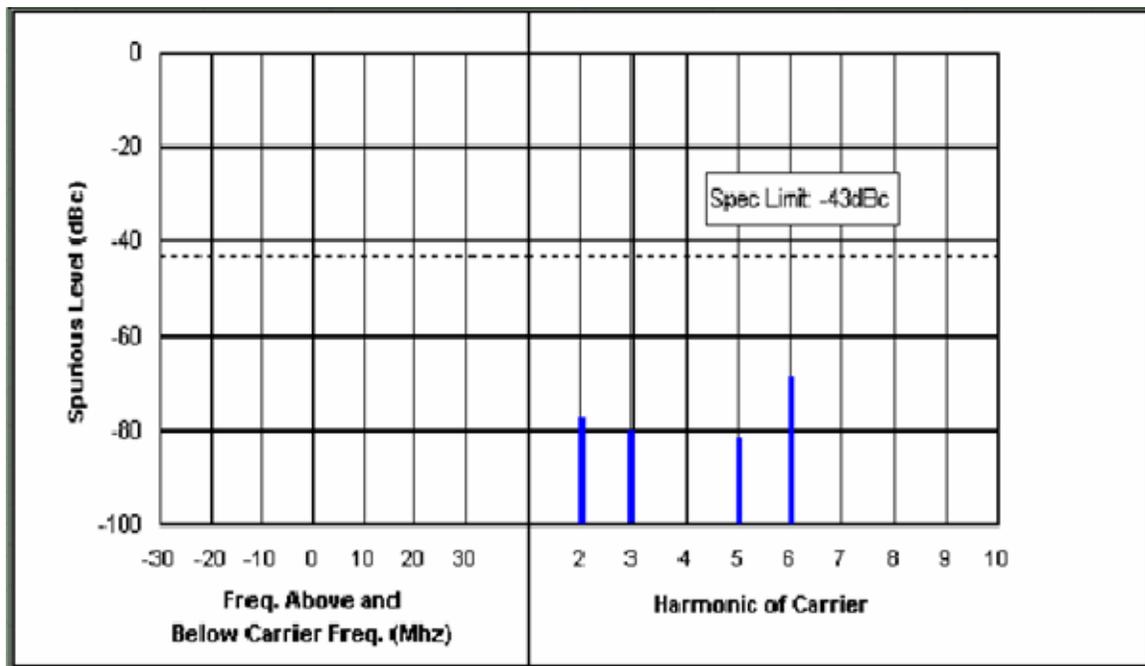


6G-4: Lo-Power Harmonic of Carrier 450.025 MHz, 25 kHz Channel Spacing

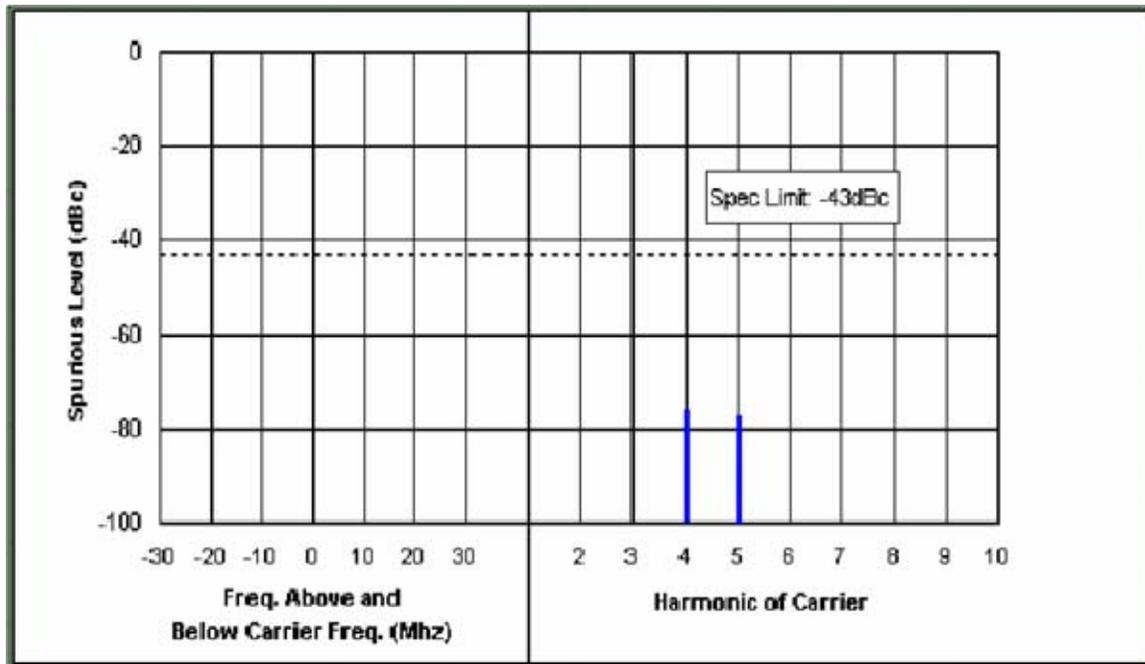


6G-5: Lo-Power Harmonic of Carrier 481.050 MHz, 25 kHz Channel Spacing

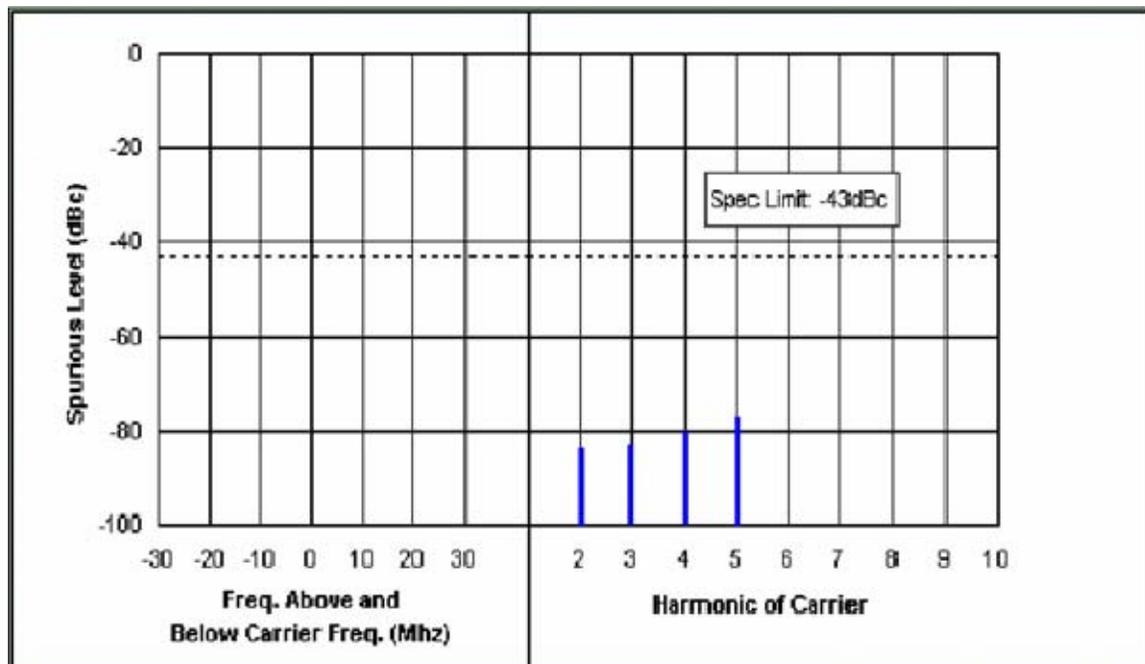


6G-6: Lo-Power Harmonic of Carrier 511.975 MHz, 25 kHz Channel Spacing

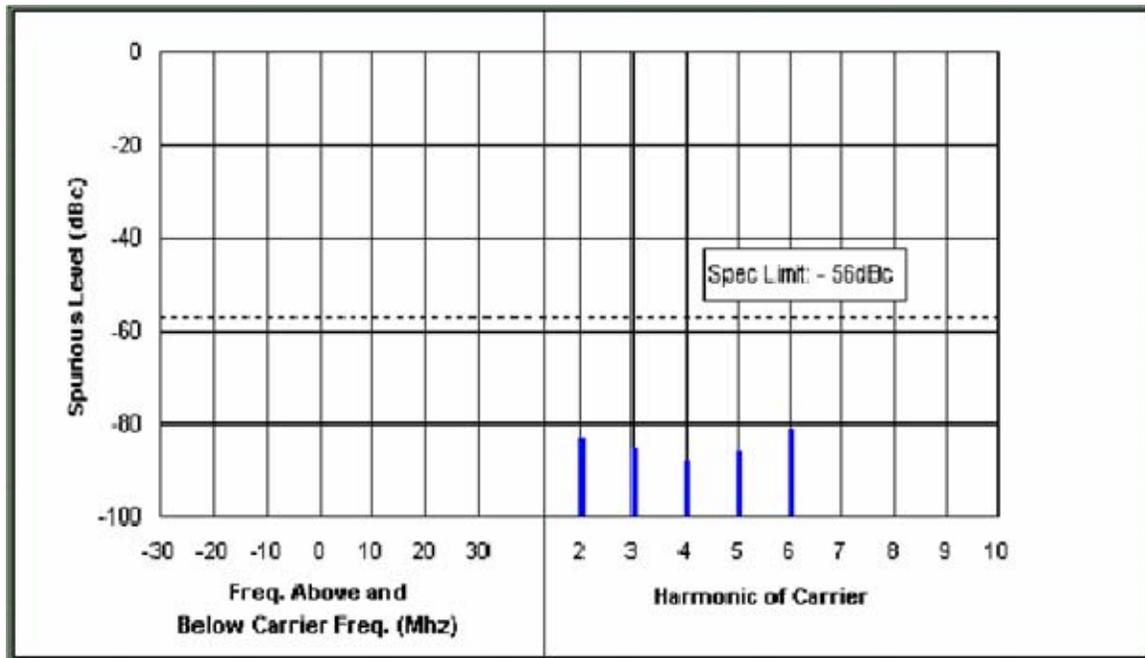


6G-7: Hi-Power Harmonic of Carrier 450.025 MHz, 12.5 kHz Channel Spacing

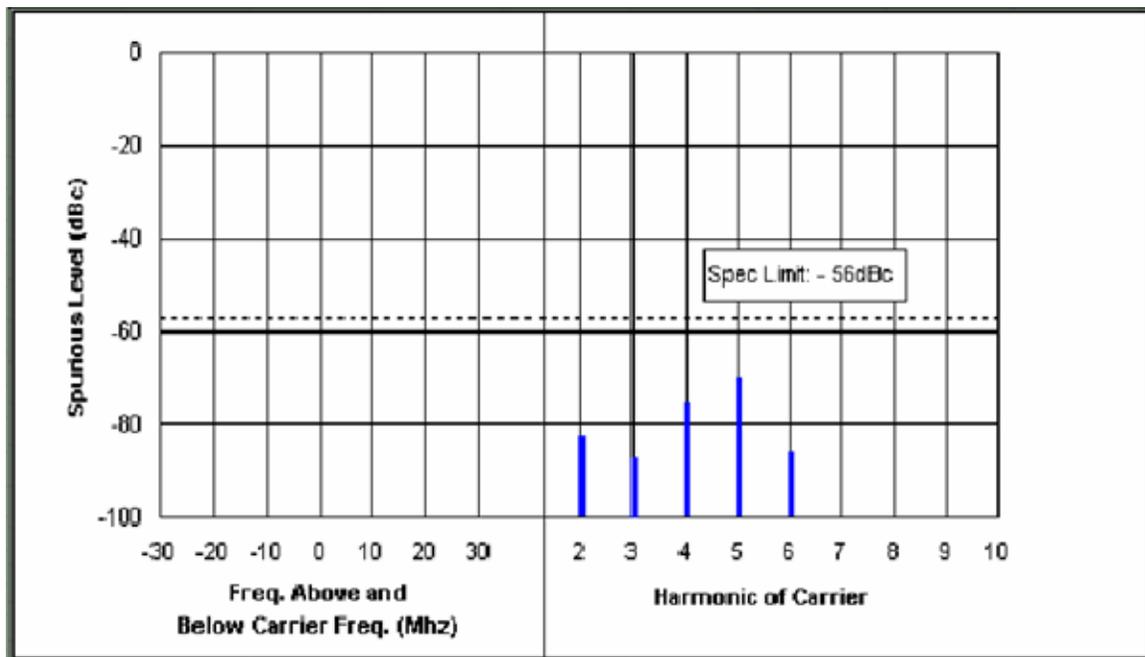


6G-8: Hi-Power Harmonic of Carrier 481.050 MHz, 12.5 kHz Channel Spacing

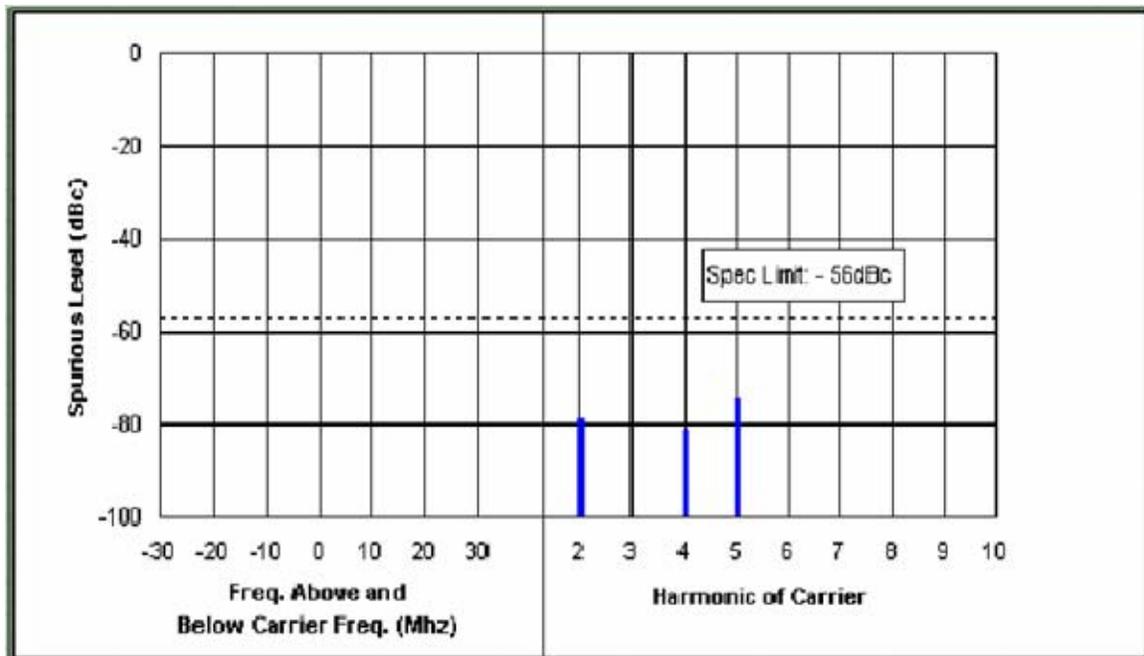


6G-9: Hi-Power Harmonic of Carrier 511.975 MHz, 12.5 kHz Channel Spacing

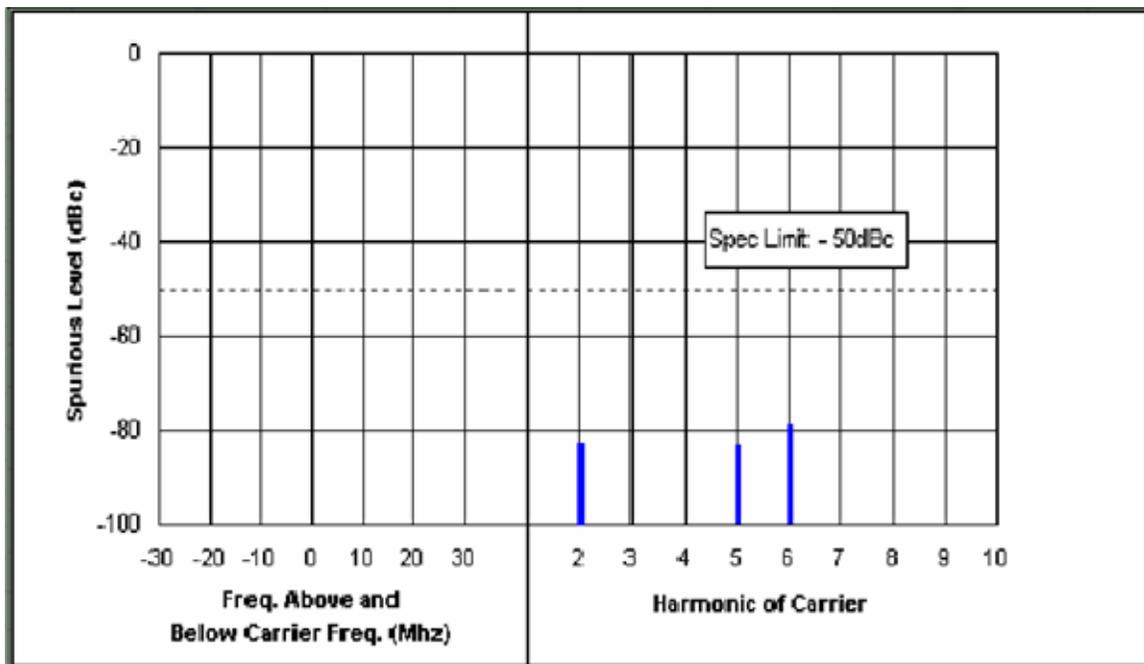

6G-10: Lo-Power Harmonic of Carrier 450.025 MHz, 12.5 kHz Channel Spacing

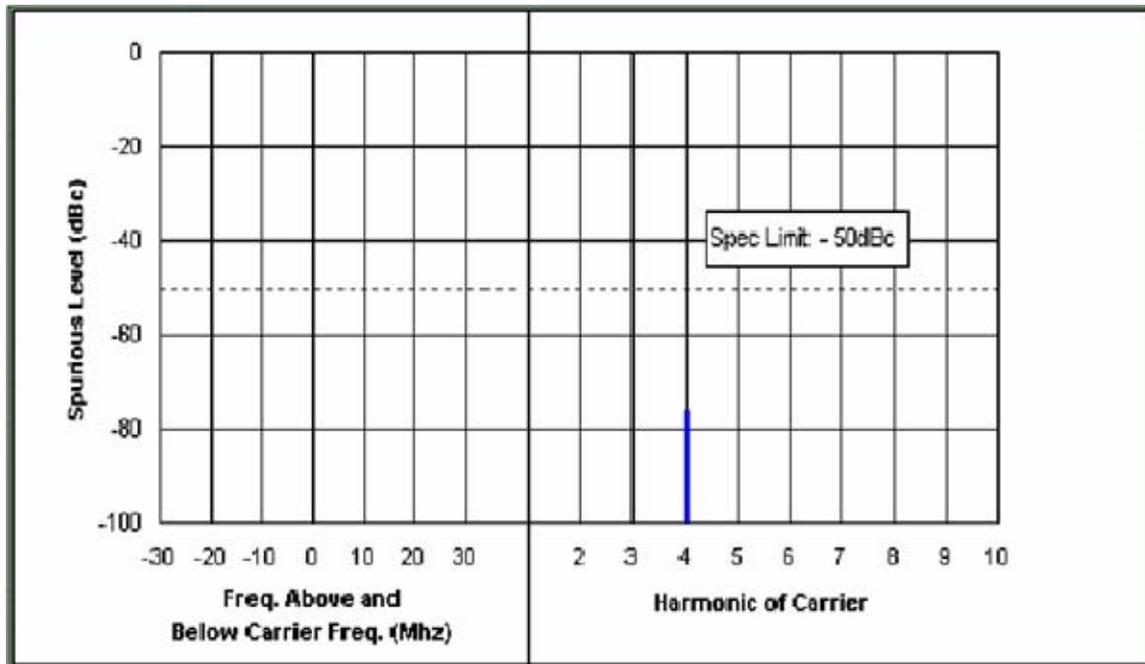

6G-11: Lo-Power Harmonic of Carrier 481.050 MHz, 12.5 kHz Channel Spacing

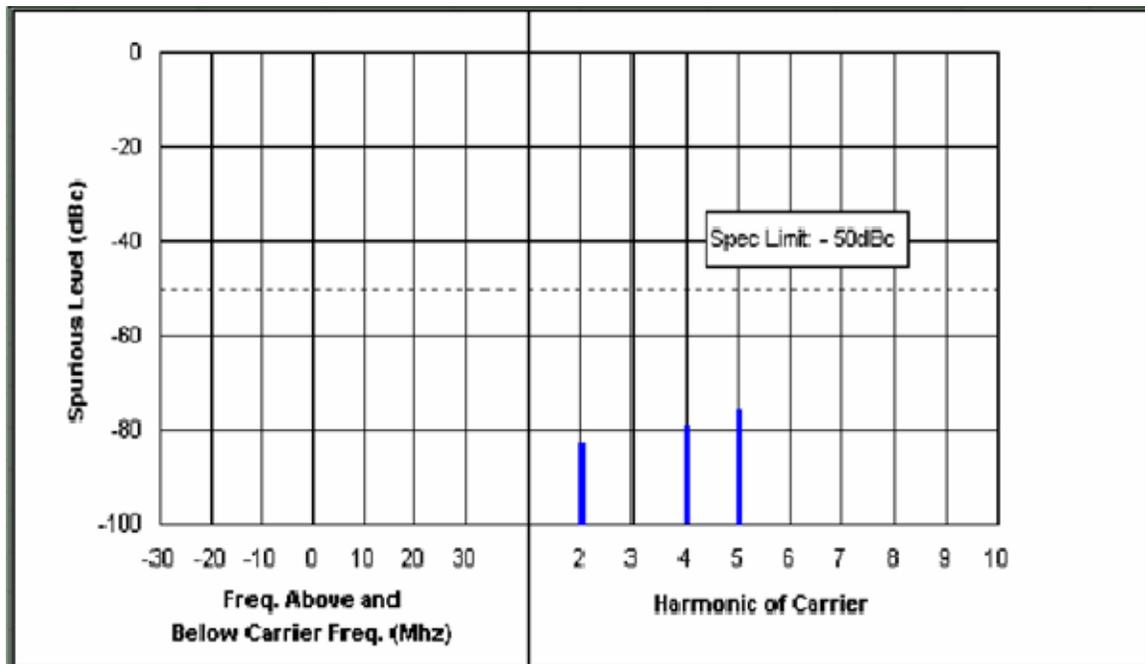

6G-12: Lo-Power Harmonic of Carrier 511.975 MHz, 12.5 kHz Channel Spacing

Exhibit 6-H (Revised)

Transmitter Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

Motorola Inc. **FCC ID: AZ489FT4845**

Transmit Radiated Spurious Emissions: MNNOW UHF 2 (EPP)
Tx Power: 4 Watts

450.025 MHz **Channel Spacing 25kHz | S/N W7DEZNGC**

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
300.0500	-13	-	-
1360.0760	-13	-53.80	-42.87
1800.9000	-13	-46.22	-47.88
2260.1260	-13	-46.70	-44.28
2700.1600	-13	-42.81	-44.74
3160.1760	-13	-48.84	-61.16
3600.2000	-13	-46.84	-51.48
4060.2260	-13	-58.21	-
4500.2500	-13	-58.24	-

481.05 MHz **Channel Spacing 25kHz | S/N W7DEZNGC**

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
562.1800	-13	-57.37	-55.78
1443.1600	-13	-47.13	-60.03
1824.2800	-13	-48.88	-63.74
2406.2600	-13	-48.85	-60.38
2888.3000	-13	-45.28	-61.27
3367.3800	-13	-48.23	-64.05
3848.4000	-13	-48.28	-62.48
4328.4500	-13	-57.78	-48.85
4810.5000	-13	-54.24	-

* Indicates the spurious emission could not be detected due to noise limitations or similar.
 The data presented here was taken using the substitution method as found in the TIA/EIA-809 document.

Motorola Plantation EMC Lab – Test Performed by: Curt McLennan **July 19, 2006**
FCC Registration: 91932 / Industry Canada: IC3679

6H-1: Hi-Power, 450.025 MHz, 25 kHz Channel Spacing
 & Hi-Power, 481.050 MHz, 25 kHz Channel Spacing


Motorola Inc. **FCC ID:AZ489FT4845**

Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)
Tx Power: 4 Watts

511.975 MHz

Channel Spacing 25kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
10239500	-13	a	-61.22
13359230	-13	-43.95	-53.46
20479000	-13	-40.95	-47.06
23598730	-13	-47.20	-47.91
30718500	-13	-48.98	-51.48
36838260	-13	-44.06	-61.84
40958000	-13	-67.19	a
48077760	-13	a	a
51187500	-13	a	a

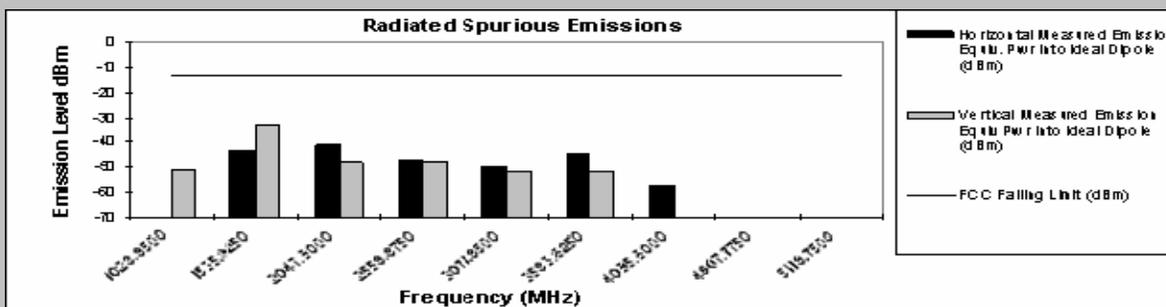

* Indicates the spurious emission could not be detected due to noise limitations or ambient.
 The data presented here was taken using the substitution method as found in the TIA/EIA-803 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Lennen
FCC Registration: 91932 / Industry Canada: IC3679

July 19, 2006

Motorola Inc. FCC ID:AZ489FT4845


Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)

Tx Power: 1 Watts

450.025 MHz

Channel Spacing 25kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
900.0500	-13	▲	▲
1350.0750	-13	-56.39	-47.55
1800.1000	-13	-55.32	-57.22
2250.1250	-13	-55.83	-55.84
2700.1500	-13	-58.24	-54.33
3150.1750	-13	▲	▲
3600.2000	-13	▲	▲
4050.2250	-13	▲	▲
4500.2500	-13	▲	▲

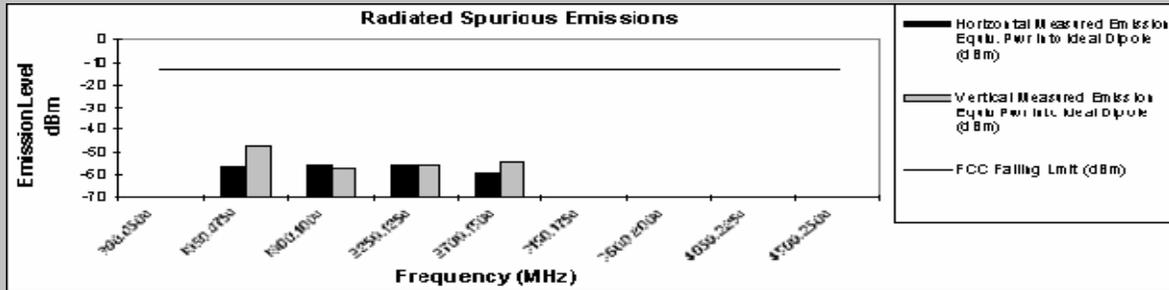


Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)

Tx Power: 1 Watts

481.05 MHz

Channel Spacing 25kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
982.1000	-13	▲	-50.62
1443.1500	-13	-51.54	-54.28
1924.2000	-13	-54.37	-57.73
2405.2500	-13	-50.28	-53.30
2886.3000	-13	-50.43	-54.07
3367.3500	-13	▲	▲
3848.4000	-13	-57.98	▲
4329.4500	-13	▲	▲
4810.5000	-13	▲	▲

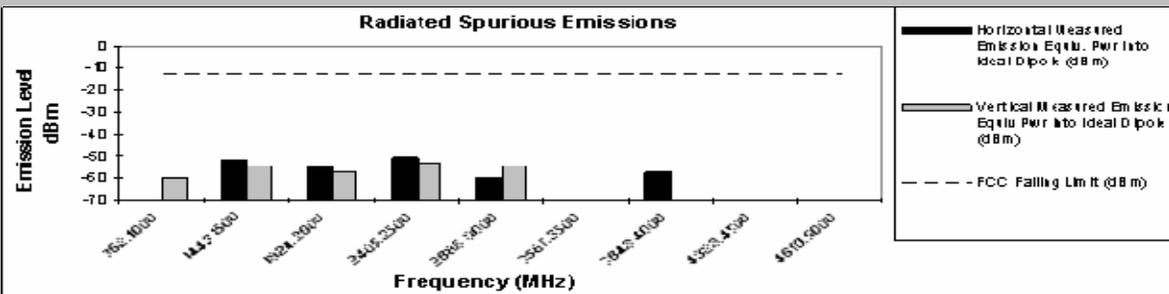


▲ Indicates the spurious emission could not be detected due to noise limitations or ambient. The data presented here was taken using the substitution method as found in the TIA/EIA-803 document.

Motorola Plantation EMC Lab – Test Performed by: Curt Mc Leenan
 FCC Registration: 91932 / Industry Code: IC1679

July 19, 2006

6H-3: Lo-Power, 450.025 MHz, 25 kHz Channel Spacing
 & Lo-Power, 481.050 MHz, 25 kHz Channel Spacing

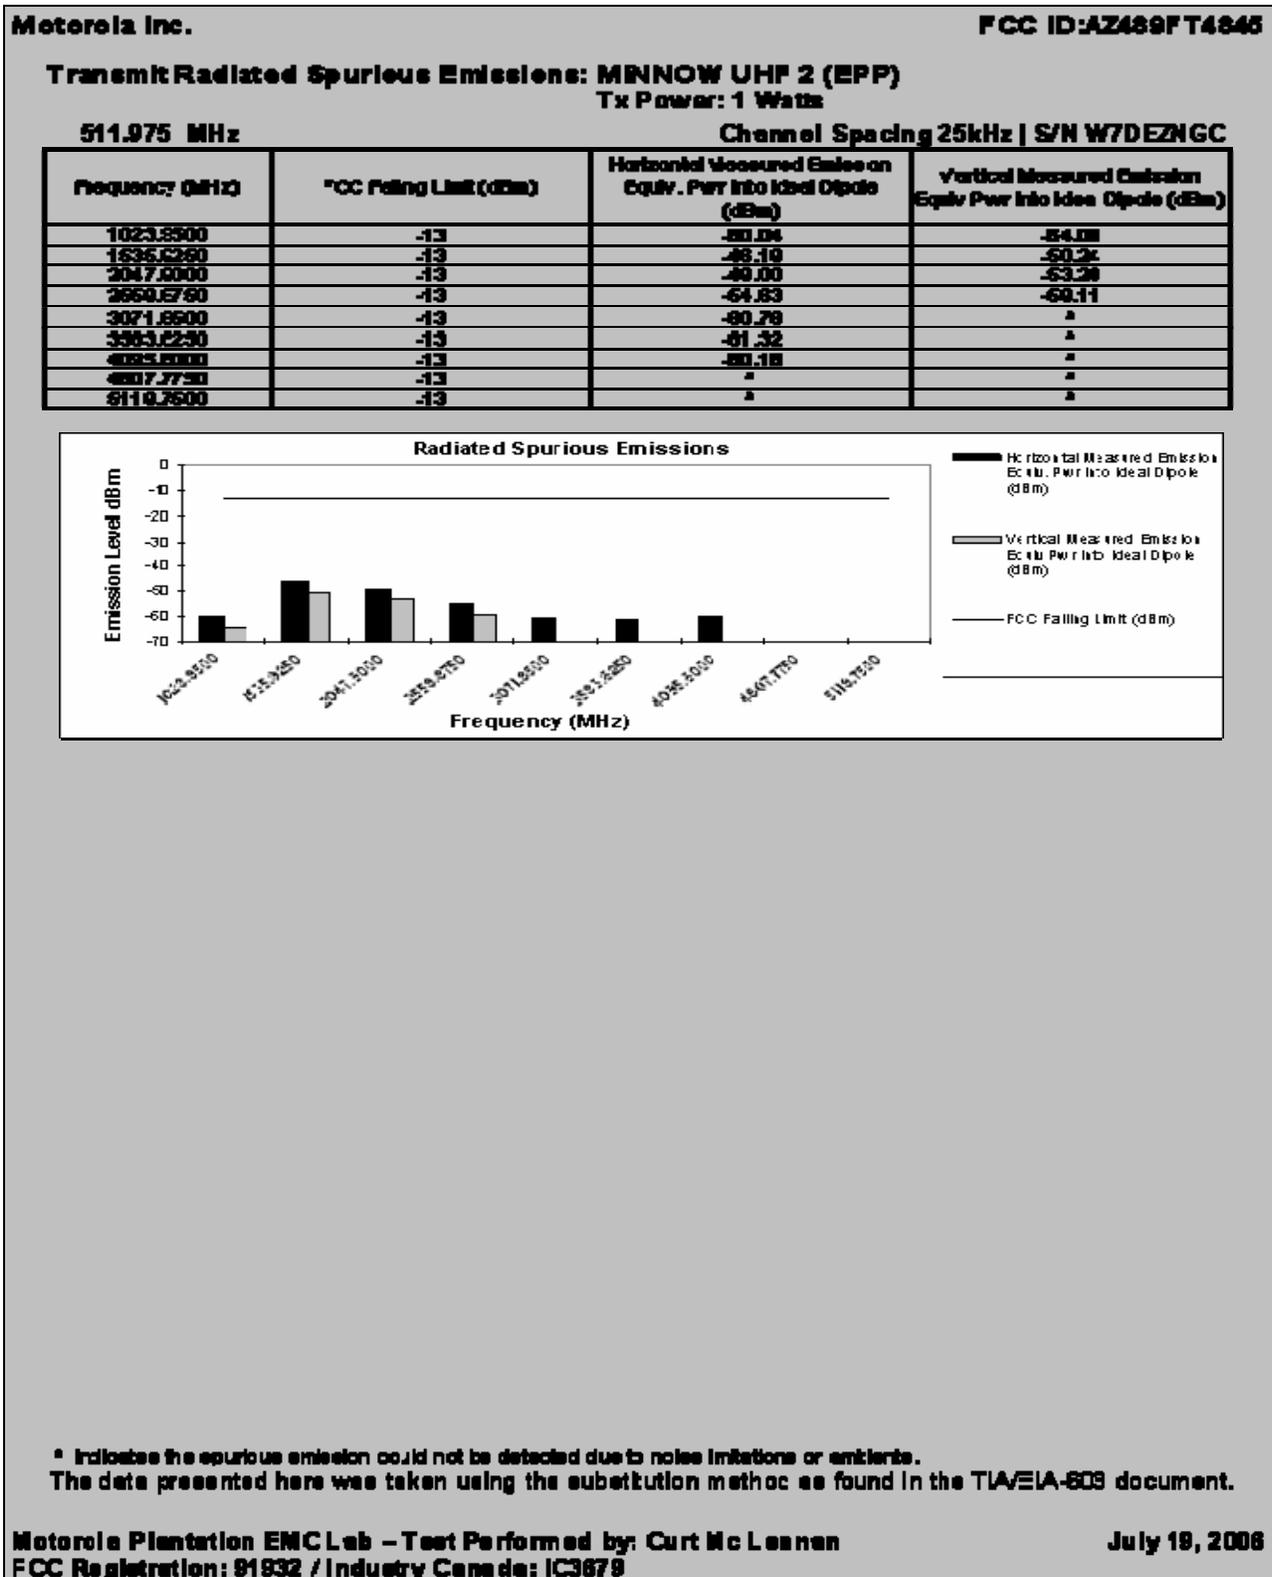

6H-4: Lo-Power, 511.975 MHz, 25 kHz Channel Spacing

Motorola Inc. FCC ID:AZ489FT4845


Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)

Tx Power: 4 Watts

450.025 MHz

Channel Spacing 12.5kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Filing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
500.0000	-30	*	*
1350.0750	-30	-61.88	-47.11
1600.1000	-30	-46.88	-60.86
2250.1250	-30	-60.00	-60.88
2700.1500	-30	-46.27	-60.88
3150.1750	-30	-53.38	-53.31
3600.2000	-30	-48.30	-52.38
4050.2250	-30	-51.85	*
4500.2500	-30	-58.11	*

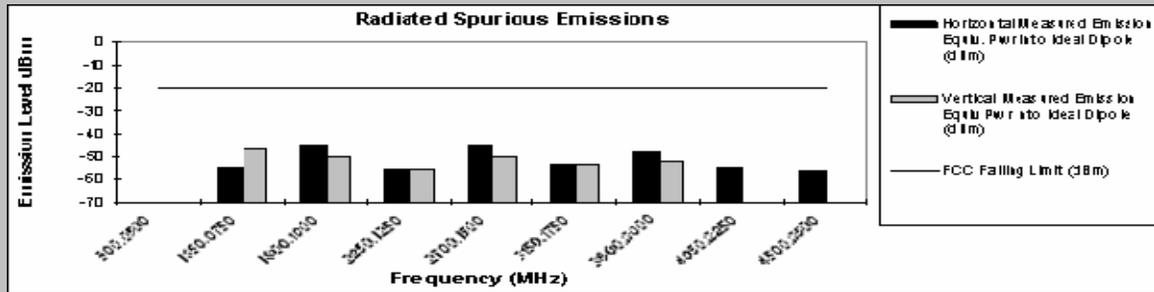


Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)

Tx Power: 4 Watts

481.05 MHz

Channel Spacing 12.5kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Filing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
582.1000	-30	-68.83	-68.88
1443.1500	-30	-62.30	-46.10
1924.2000	-30	-48.78	-61.82
2405.2500	-30	-48.04	-48.81
2886.3000	-30	-46.34	-60.46
3367.3500	-30	-68.84	*
3848.4000	-30	-47.40	-54.73
4329.4500	-30	-54.22	*
4810.5000	-30	-55.73	*

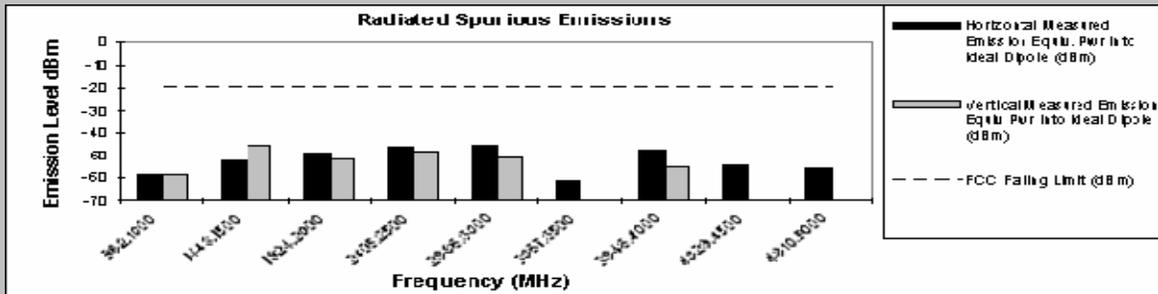

* indicates the spurious emission could not be detected due to noise limitations or emitters. The data presented here was taken using the substitution method as found in the TIA/EIA-803 document.

Motorola Plantation EMC Lab – Test Performed by: Curt McLennen
 FCC Registration: 81932 / Industry Canada: IC3679

July 19, 2008


6H-5: Hi-Power, 450.025 MHz, 12.5 kHz Channel Spacing
 & Hi-Power, 481.050 MHz, 12.5 kHz Channel Spacing

Motorola Inc. FCC ID:AZ489FT4845

Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)
Tx Power: 4 Watts

511.975 MHz **Channel Spacing 12.5kHz | S/N W7DEZNGC**

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr into Ideal Dipole (dBm)
~023.8640	-20	-33.51	-53.47
~335.9230	-20	-46.06	-46.62
2047.3080	-20	-40.31	-46.91
2559.8730	-20	-43.43	-49.12
3071.8640	-20	-46.42	-49.36
3583.8260	-20	-63.64	-68.10
4095.8080	-20	-66.72	*
4607.7730	-20	*	*
5119.7580	-20	-54.91	*

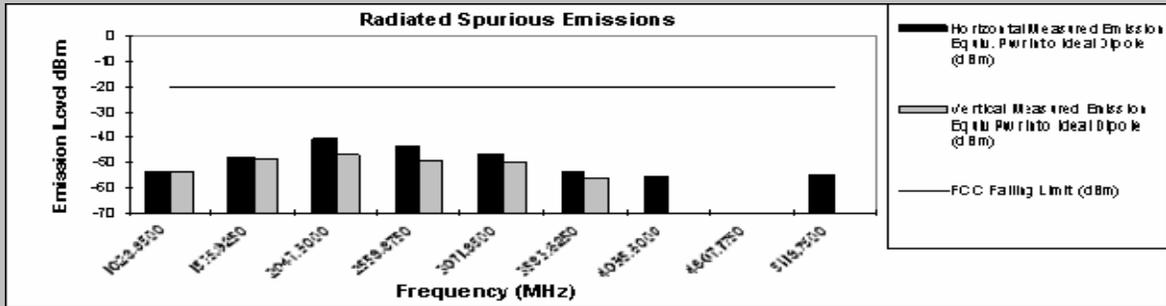

* Indicates the spurious emission could not be detected due to noise limitations or emissions.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt McLennen
 FCC Registration: 91932 / Industry Canada: IC3679

July 19, 2006

Motorola Inc. FCC ID:AZ489FT4845


Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)

Tx Power: 1 Watts

450.025 MHz

Channel Spacing 12.5kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Filing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
580.0250	-30	▲	▲
1350.0750	-30	-61.04	-49.35
1800.1000	-30	-61.80	-60.37
2250.1250	-30	-65.02	-60.84
2700.1500	-30	-68.24	-63.72
3150.1750	-30	▲	▲
3600.2000	-30	▲	▲
4050.2250	-30	▲	▲
4500.2500	-30	▲	▲

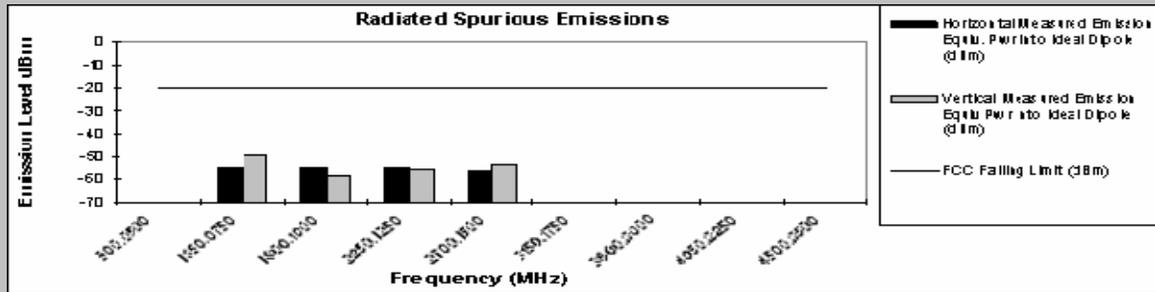


Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)

Tx Power: 1 Watts

481.05 MHz

Channel Spacing 12.5kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Filing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
582.1000	-30	-58.28	-52.35
1443.1500	-30	-61.74	-64.33
1924.2000	-30	-62.31	-67.43
2405.2500	-30	-63.47	-62.48
2886.3000	-30	-67.83	-69.13
3367.3500	-30	▲	▲
3848.4000	-30	-68.13	▲
4329.4500	-30	▲	▲
4810.5000	-30	▲	▲

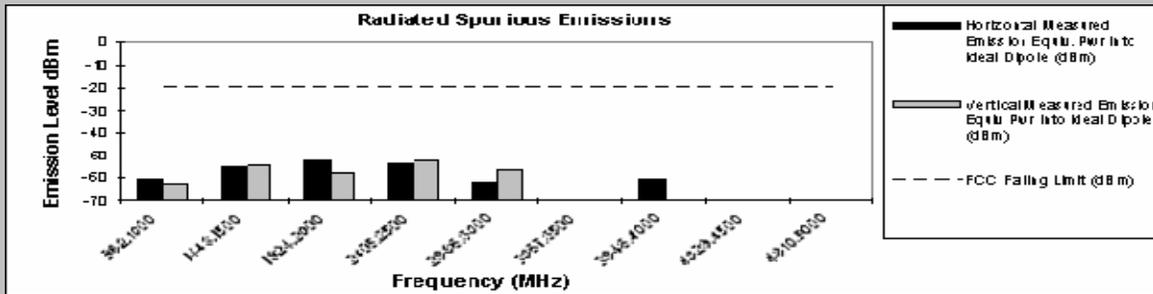

▲ indicates the spurious emission could not be detected due to noise limitations or emittance. The data presented here was taken using the substitution method as found in the TIA/EIA-803 document.

Motorola Plantation EMC Lab – Test Performed by: Curt McLennen
 FCC Registration: 81932 / Industry Canada: IC3679

July 19, 2008

6H-7: Lo-Power, 450.025 MHz, 12.5 kHz Channel Spacing
 & Lo-Power, 481.050 MHz, 12.5 kHz Channel Spacing

Motorola Inc. FCC ID:AZ489FT4845


Transmit Radiated Spurious Emissions: MINNOW UHF 2 (EPP)

Tx Power: 1 Watts

511.975 MHz

Channel Spacing 12.5kHz | S/N W7DEZNGC

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
*023.8500	-20	-30.37	*
*335.3250	-20	-45.87	-45.13
2047.3000	-20	-47.12	-53.20
2559.8750	-20	-57.88	-56.21
3071.8500	-20	-60.34	*
3583.8250	-20	-61.21	*
4095.8000	-20	*	*
4607.7750	-20	*	*
5119.7500	-20	*	*

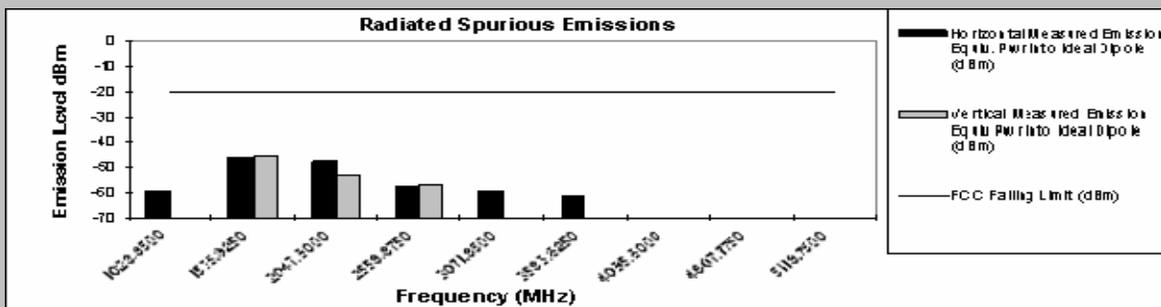

* Indicates the spurious emission could not be detected due to noise limitations or emissions.
 The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Curt McLennen
 FCC Registration: 91932 / Industry Canada: IC3679

July 19, 2006