

EXHIBIT 6

INDEX OF SUBMITTED MEASURED DATA

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6A – RF Power Output (Table)

EXHIBIT 6B – Transmit Audio Response (1 Graph)
6B-1 – 25 kHz Channel Spacing

EXHIBIT 6C – Transmit Audio Post Limiter Lowpass Filter Response (1 Graph)
6C-1 – 25 kHz Channel Spacing

EXHIBIT 6D – Modulation Limiting Characteristics (3 Graphs)
6D-1 – 25 kHz Channel Spacing, Carrier Squelch Mode (CSQ)
6D-2 – 25 kHz Channel Spacing, Tone Private Line (TPL) Mode
6D-3 – 25 kHz Channel Spacing, Digital Private Line (DPL) Mode

EXHIBIT 6E – Occupied Bandwidth (6 Spectrum Analyzer Plots)
6E-1 - 25 kHz Channel Spacing, 2500 Hz Audio Modulation Only
6E-2 - 25 kHz Channel Spacing, 2500 Hz Audio and PL Tone Modulation
6E-3 - 25 kHz Channel Spacing, 2500 Hz Audio and DPL Tone Modulation
6E-4 - 25 kHz Channel Spacing, DTMF Modulation Only
6E-5 - 25 kHz Channel Spacing, DTMF Modulation and PL Tone Modulation
6E-6 - 25 kHz Channel Spacing, DTMF Modulation and DPL Tone Modulation

EXHIBIT 6F – Conducted Spurious Emissions (12 Tables)
6F-1 – 1 Watts, 806.0125 MHz
6F-2 – 1 Watts, 815.0125 MHz
6F-3 – 1 Watts, 823.9875 MHz
6F-4 – 1 Watts, 851.0125 MHz
6F-5 – 1 Watts, 860.0125 MHz
6F-6 – 1 Watts, 869.0000 MHz
6F-7 – 2.95 Watts, 806.0125 MHz
6F-8 – 2.95 Watts, 815.0125 MHz
6F-9 – 2.95 Watts, 823.9875 MHz
6F-10 – 2.40 Watts, 851.0125 MHz
6F-11 – 2.40 Watts, 860.0125 MHz
6F-12 – 2.40 Watts, 869.0000 MHz

EXHIBIT 6G – Radiated Spurious Emissions (6 Graphs)
6G-1 – 2.95 Watts, 806.0125 MHz
6G-2 – 2.95 Watts, 815.0125 MHz
6G-3 – 2.95 Watts, 823.9875 MHz
6G-4 – 2.40 Watts, 851.0125 MHz
6G-5 – 2.40 Watts, 860.0125 MHz
6G-6 – 2.40 Watts, 868.9875 MHz
6G-7 – 1.0 Watts, 806.0125 MHz
6G-8 – 1.0 Watts, 815.0125 MHz
6G-9 – 1.0 Watts, 823.9875 MHz
6G-10 – 1.0 Watts, 851.0125 MHz
6G-11 – 1.0 Watts, 860.0125 MHz
6G-12 – 1.0 Watts, 868.9875 MHz

EXHIBIT 6H – Frequency Stability (2 Graphs)
6H-1 – Frequency Stability vs. Temperature
6H-2 – Frequency Stability vs. Voltage

EXHIBIT 6I – Power Line Conducted Spurious Emissions (4 Graphs)

- 6I-1 – Radio off Line/Neutral
- 6I-2 – Radio on Rx Line/Neutral
- 6I-3 – Radio on Tx Line/Neutral

EXHIBIT 6A – RF Conducted Power Output Data -- Pursuant 47 CFR 2.1046(a), 2.1033(c)(6), 2.1033(c)(7) and 2.1033(c)(8)

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device (Q100).

At maximum output power setting, Frequency 806.0125 MHz:

Output RF power	2.94	Watts
DC Voltage	7.50	Volts
DC Current	1.19	A
DC Input Power	8.93	Watts

At minimum output power setting, Frequency 806.0125 MHz:

Output RF power	1.07	Watts
DC Voltage	7.50	Volts
DC Current	0.74	A
DC Input Power	5.55	Watts

At maximum output power setting, Frequency 815.0125 MHz:

Output RF power	2.95	Watts
DC Voltage	7.50	Volts
DC Current	1.28	A
DC Input Power	9.60	Watts

At minimum output power setting, Frequency 815.0125 MHz:

Output RF power	1.09	Watts
DC Voltage	7.50	Volts
DC Current	0.80	A
DC Input Power	6.00	Watts

At maximum output power setting, Frequency 823.9875 MHz:

Output RF power	2.95	Watts
DC Voltage	7.50	Volts
DC Current	1.34	A
DC Input Power	10.05	Watts

At minimum output power setting, Frequency 823.9875 MHz:

Output RF power	1.10	Watts
DC Voltage	7.50	Volts
DC Current	0.83	A
DC Input Power	6.23	Watts

At maximum output power setting, Frequency 851.0125 MHz:

Output RF power	2.40	Watts
DC Voltage	7.50	Volts
DC Current	1.18	A
DC Input Power	8.85	Watts

At minimum output power setting, Frequency 851.0125 MHz:

Output RF power	1.14	Watts
DC Voltage	7.50	Volts
DC Current	0.87	A
DC Input Power	6.53	Watts

At maximum output power setting, Frequency 860.0125 MHz:

Output RF power	2.40	Watts
DC Voltage	7.50	Volts
DC Current	1.19	A
DC Input Power	8.93	Watts

At minimum output power setting, Frequency 860.0125 MHz:

Output RF power	1.16	Watts
DC Voltage	7.50	Volts
DC Current	0.89	A
DC Input Power	6.68	Watts

At maximum output power setting, Frequency 869.0000 MHz:

Output RF power	2.41	Watts
DC Voltage	7.50	Volts
DC Current	1.19	A
DC Input Power	8.93	Watts

At minimum output power setting, Frequency 869.0000 MHz:

Output RF power	1.15	Watts
DC Voltage	7.50	Volts
DC Current	0.82	A
DC Input Power	6.15	Watts

EXHIBIT 6B – Transmit Audio Response - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

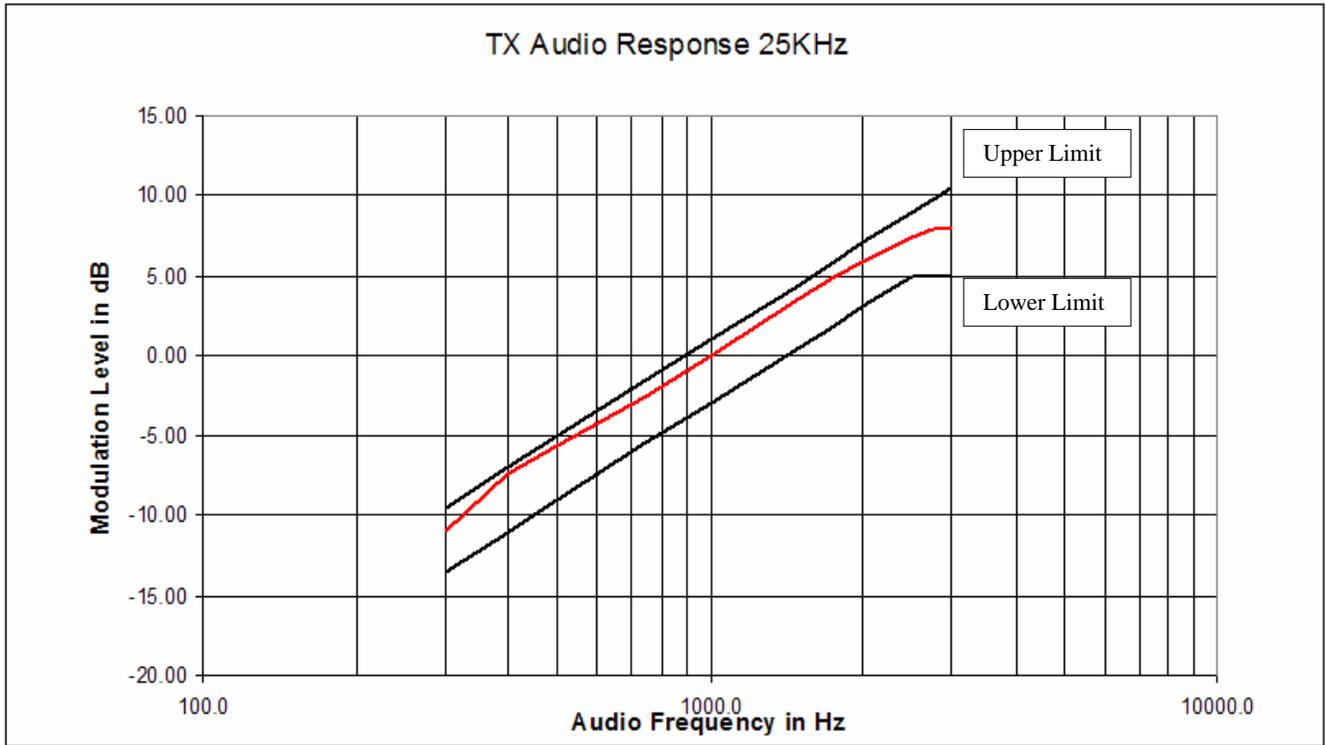


Figure 6B-1: 25 kHz Channel Spacing, Transmit Audio Response

EXHIBIT 6C – Transmit Audio Post Limiter Lowpass Filter Response - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

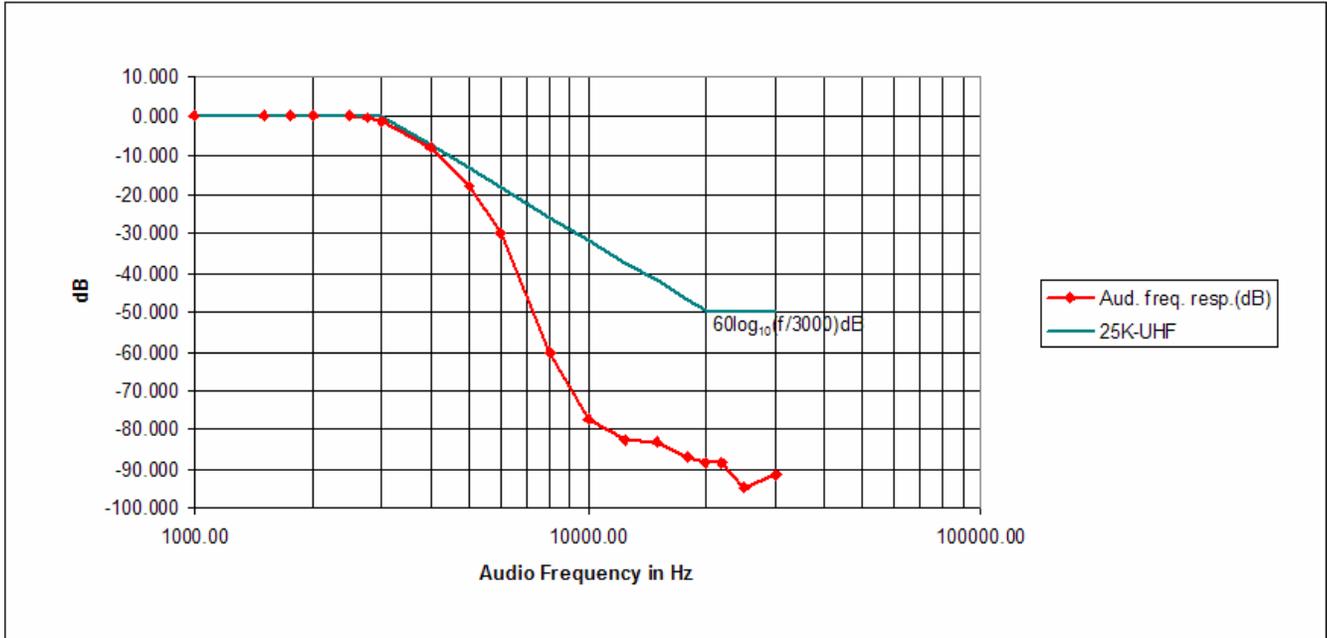


Figure 6C-1: 25 kHz Channel Spacing, Transmit Audio Post Limiter Lowpass Filter Response

EXHIBIT 6D – Modulation Limiting Characteristics - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

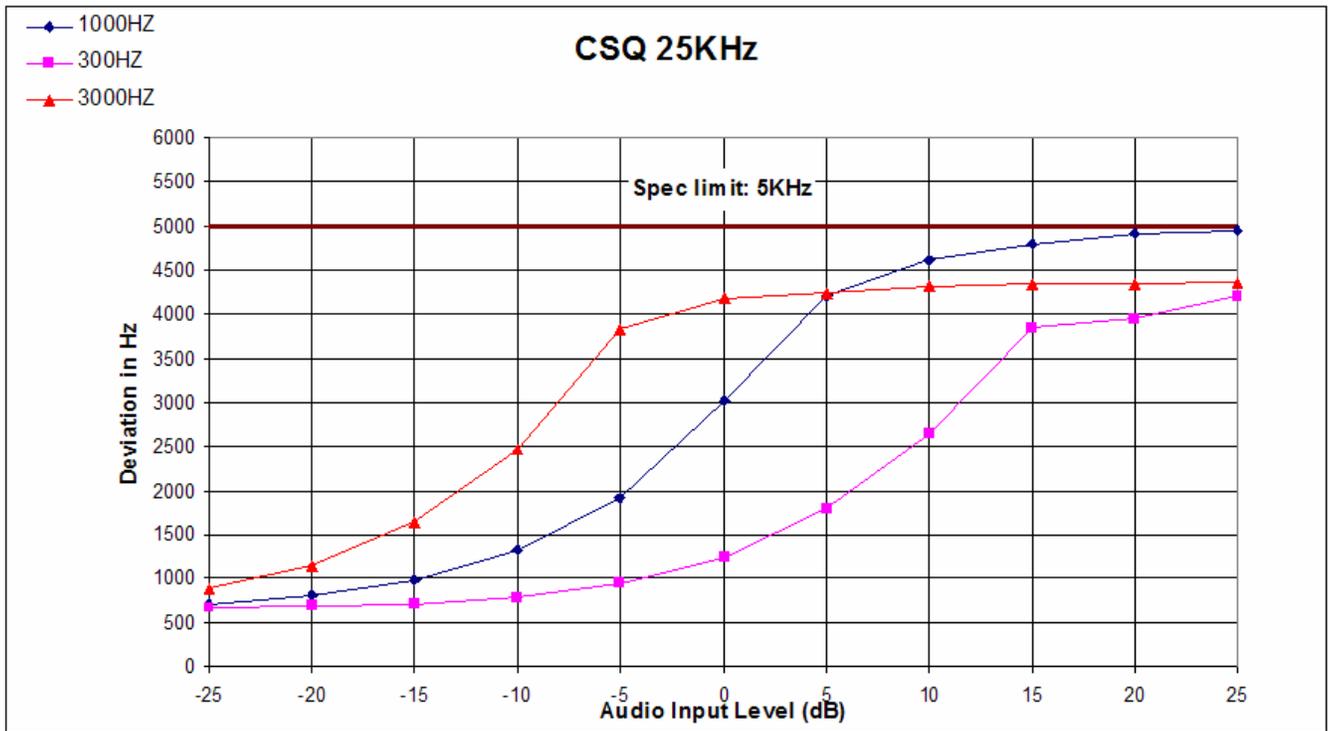


Figure 6D-1: 25 kHz Channel Spacing, Carrier Squelch Mode

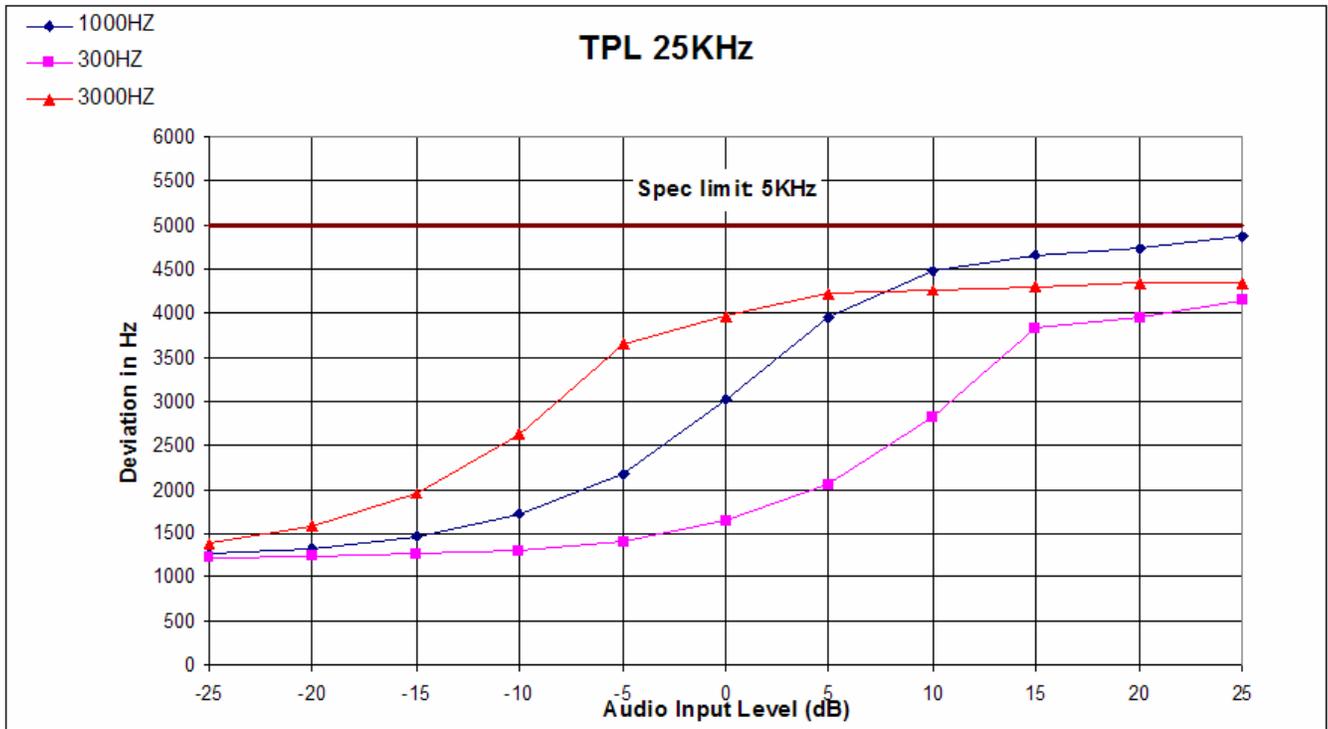


Figure 6D-2: 25 kHz Channel Spacing, Tone Private Line (TPL) Mode

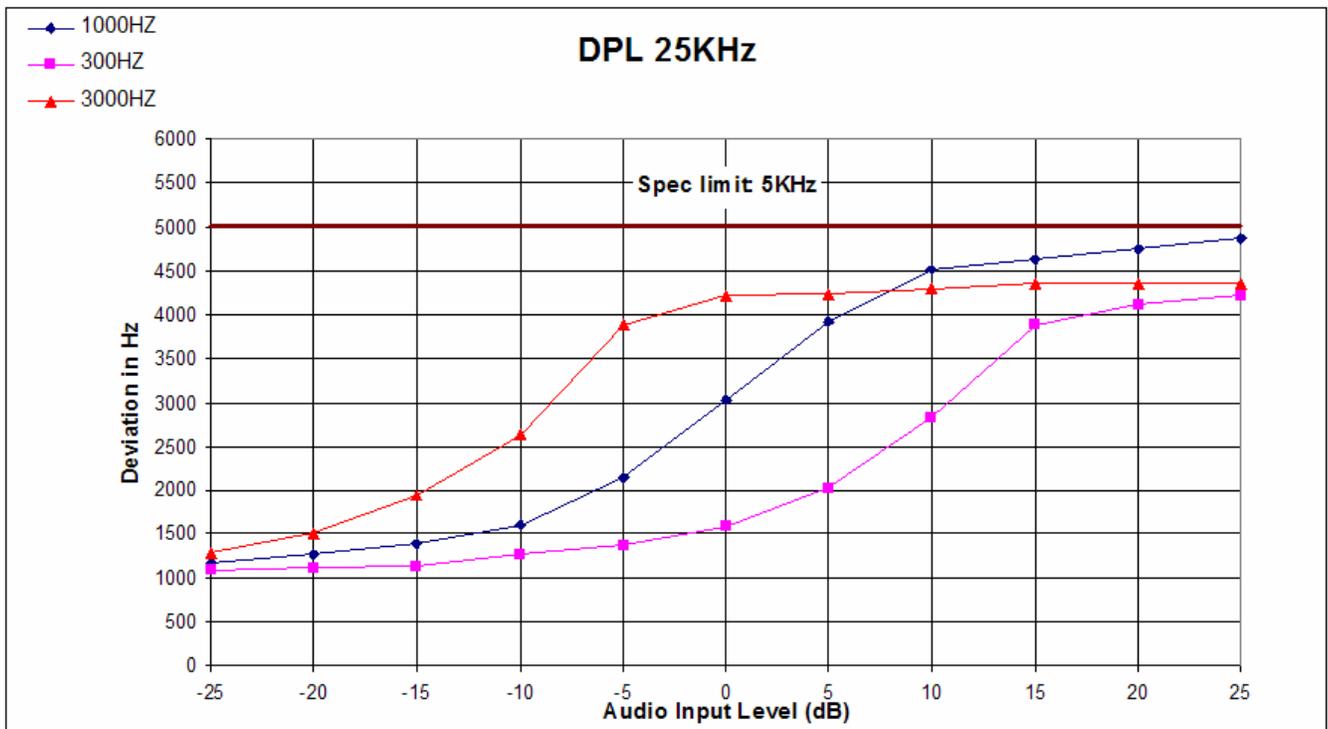


Figure 6D-3: 25 kHz Channel Spacing, Digital Private Line (DPL) Mode

EXHIBIT 6E- Occupied Bandwidth Data -- Pursuant 47 CFR 2.1049, 90.210(g) and 90.691

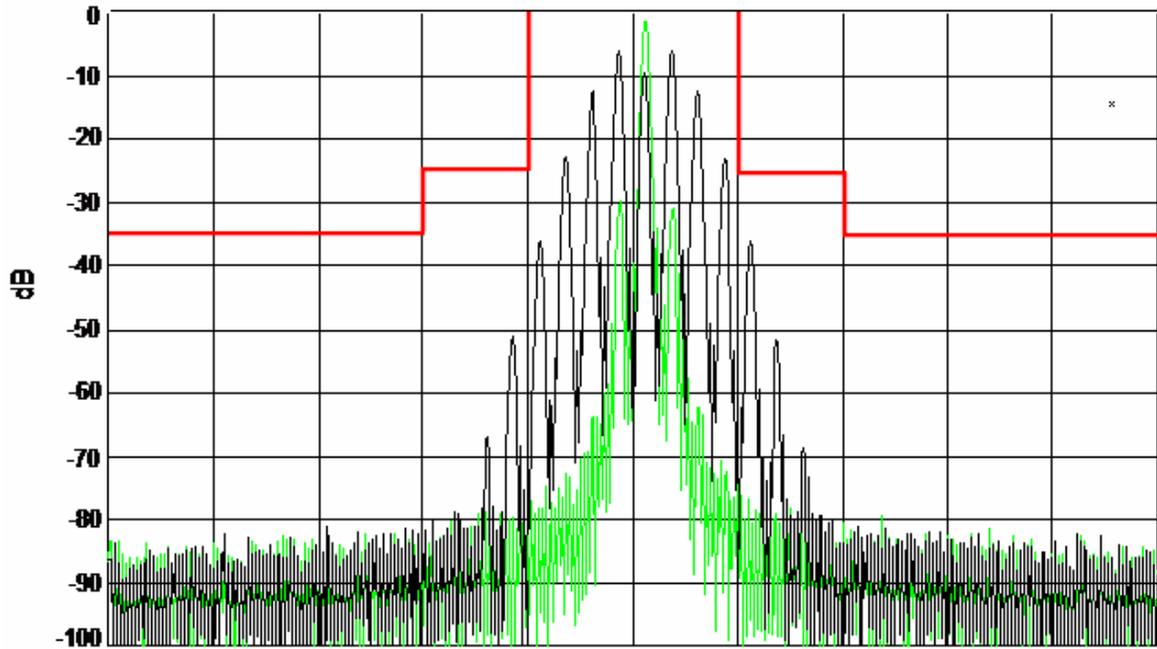


Figure 6E-1: Mask B; 25 kHz Channel Spacing, 2500 Hz Audio Modulation Only; 16K0F3E

CENTER FREQUENCY(MHz):	815.0125
RESOLUTION BANDWIDTH(Hz):	300
VIDEO BANDWIDTH(kHz):	3
SPAN(kHz):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	25.5
ATTEN (dB)	40

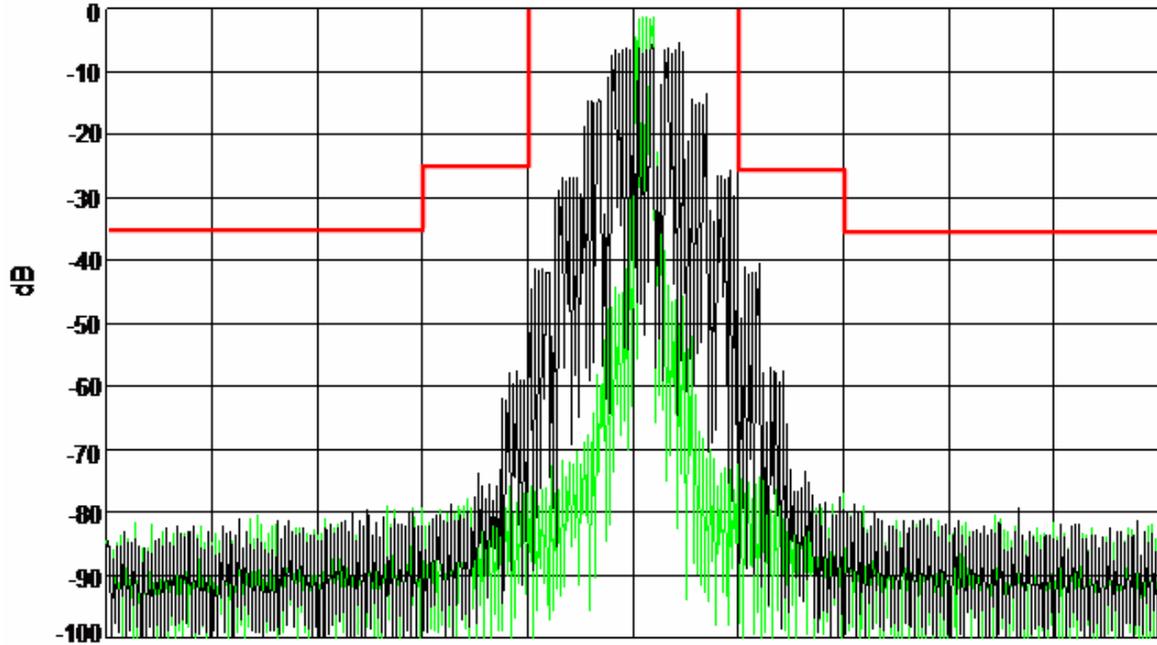


Figure 6E-2: Mask B; 25 kHz Channel Spacing, 2500 Hz Audio and TPL Tone Modulation; 16K0F3E

CENTER FREQUENCY(MHz):	815.0125
RESOLUTION BANDWIDTH(Hz):	300
VIDEO BANDWIDTH(kHz):	3
SPAN(kHz):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	24.0
ATTEN (dB)	40

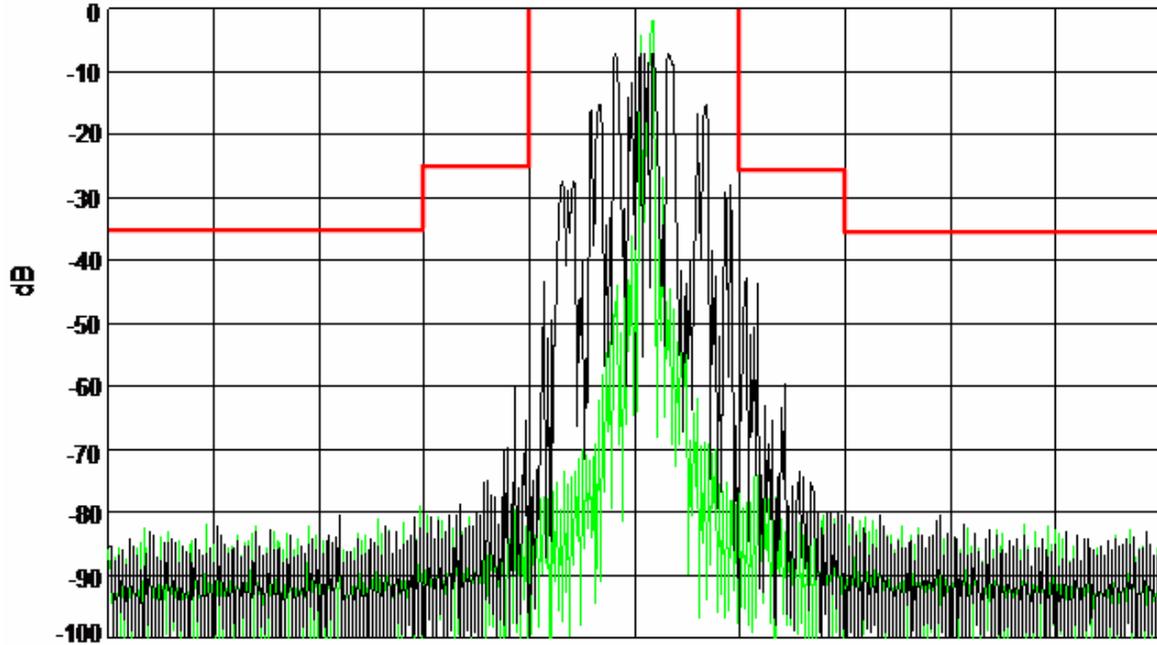


Figure 6E-3: Mask B; 25 kHz Channel Spacing, 2500 Hz Audio and DPL Tone Modulation; 16K0F3E

CENTER FREQUENCY(MHz):	815.0125
RESOLUTION BANDWIDTH(Hz):	300
VIDEO BANDWIDTH(kHz):	3
SPAN(kHz):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	26.0
ATTEN (dB)	40

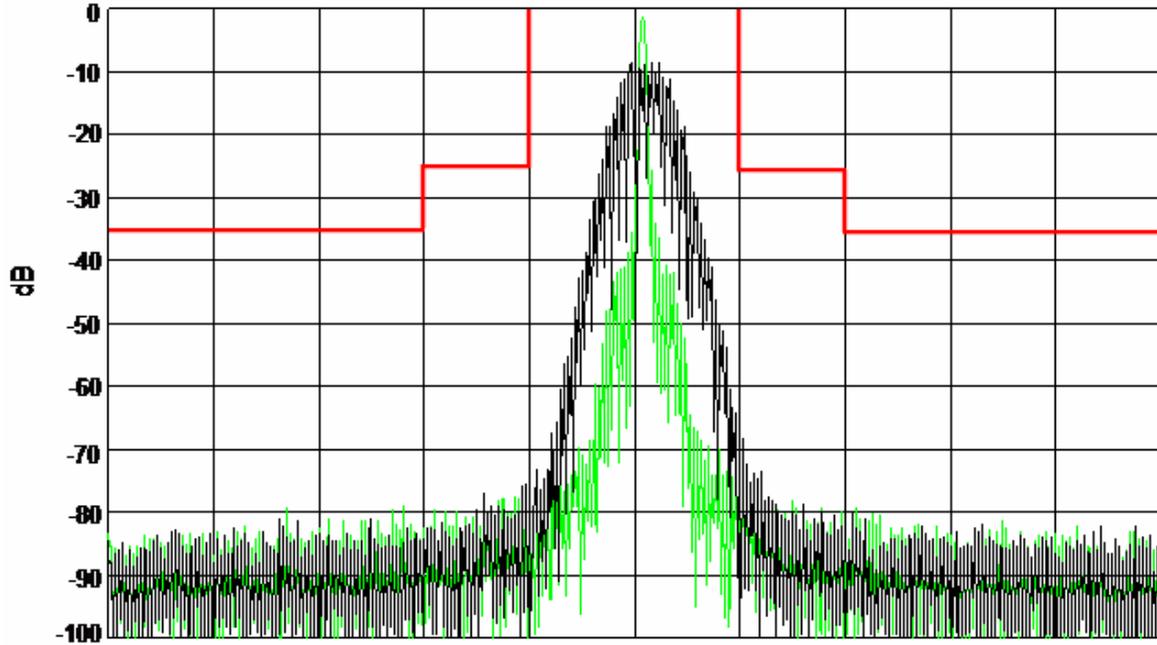


Figure 6E-4: Mask B; 25 kHz Channel Spacing, DTMF Modulation Only; 16K0F3E

CENTER FREQUENCY(MHz):	815.0125
RESOLUTION BANDWIDTH(Hz):	300
VIDEO BANDWIDTH(kHz):	3
SPAN(kHz):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	25.9
ATTEN (dB)	40

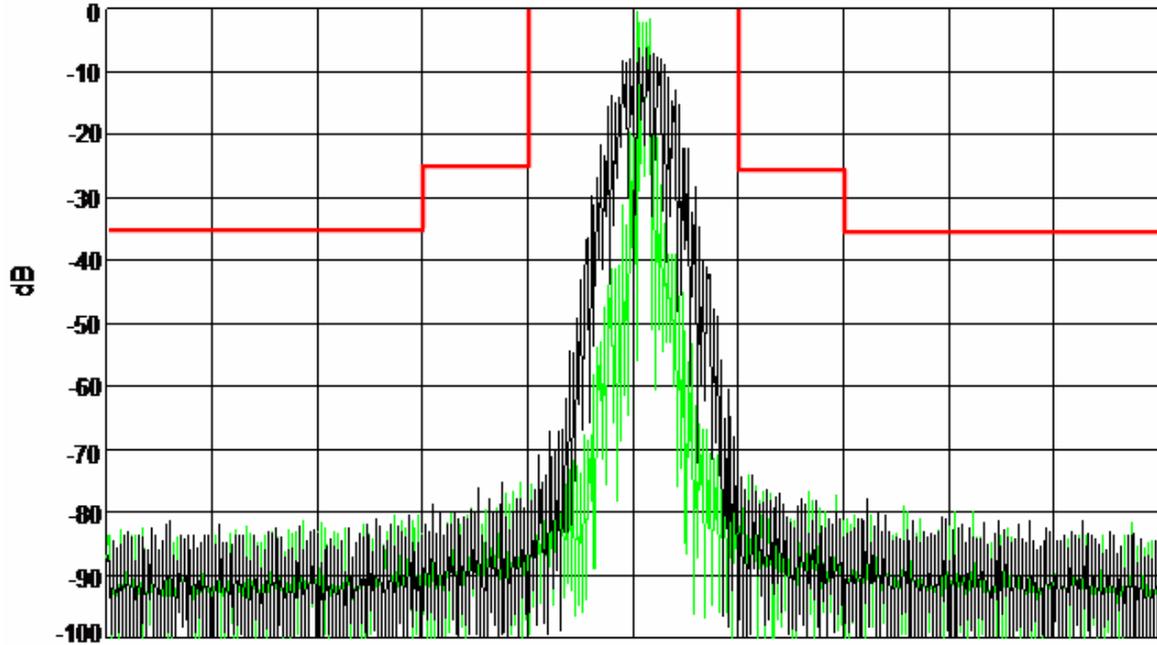


Figure 6E-5: Mask B; 25 kHz Channel Spacing, DTMF Modulation and TPL Tone Modulation; 16K0F3E

CENTER FREQUENCY(MHz):	815.0125
RESOLUTION BANDWIDTH(Hz):	300
VIDEO BANDWIDTH(kHz):	3
SPAN(kHz):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	25.0
ATTEN (dB)	40

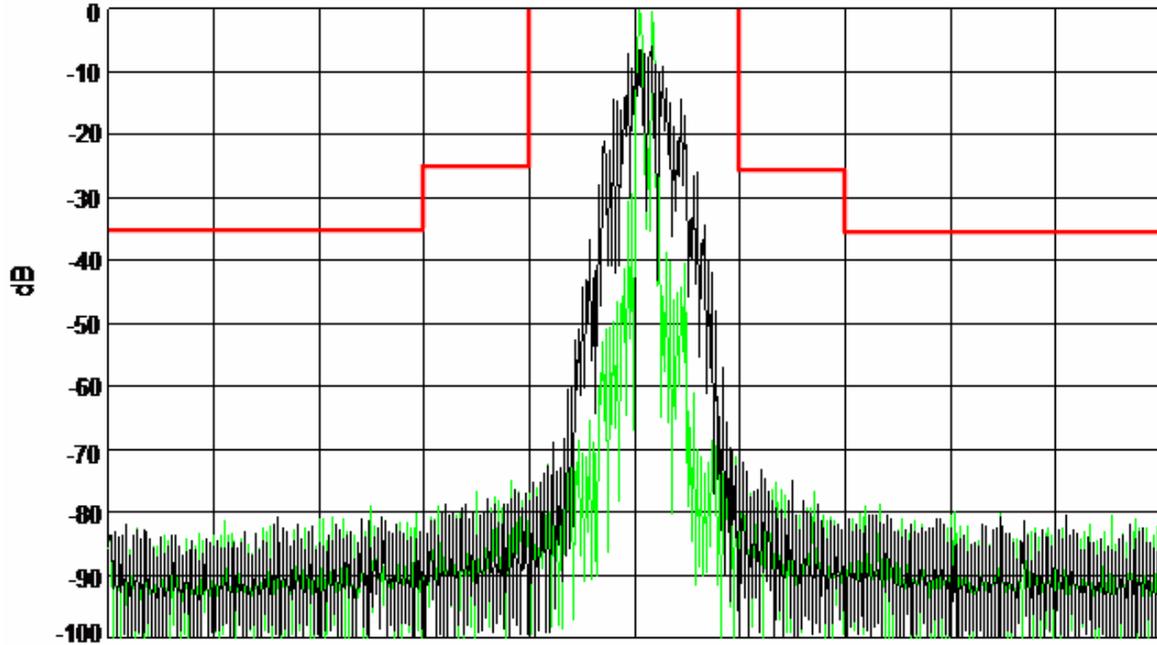


Figure 6E-6: Mask B; 25 kHz Channel Spacing, DTMF Modulation and DPL Tone Modulation; 16K0F3E

CENTER FREQUENCY(MHz):	815.0125
RESOLUTION BANDWIDTH(Hz):	300
VIDEO BANDWIDTH(kHz):	3
SPAN(kHz):	100
SWEEP TIME(SEC):	3
SCALE(DB/):	10
REF LEVEL(dBm)	24.8
ATTEN (dB)	40

EXHIBIT 6F – Conducted Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c) (13)

Note: Red lines on graphs correspond to the FCC limit of -13dBm.

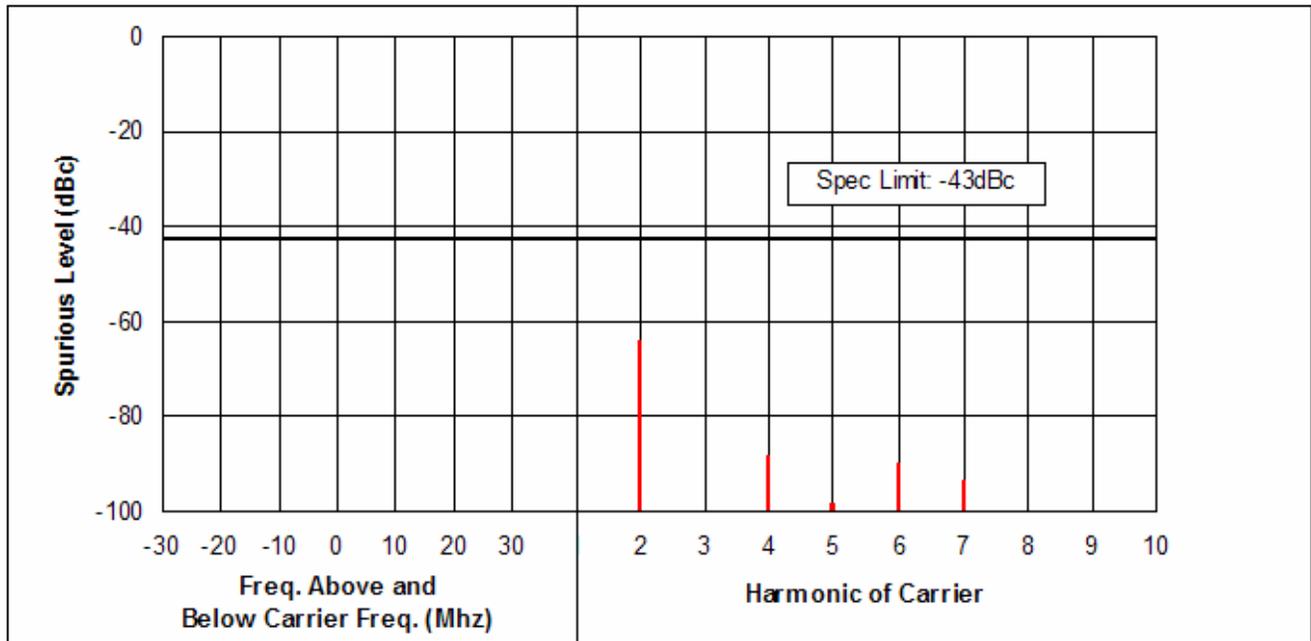


Table 6F-1: 1 Watt Harmonic of Carrier 806.0125 MHz

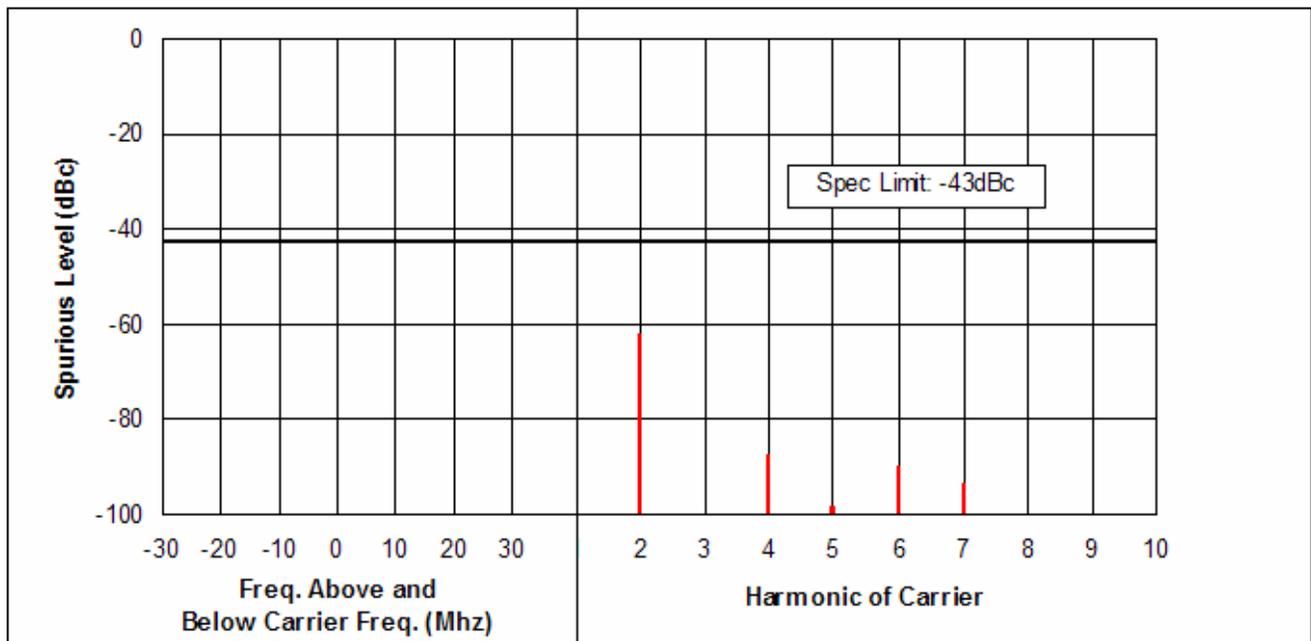


Table 6F-2: 1 Watt Harmonic of Carrier 815.0125 MHz

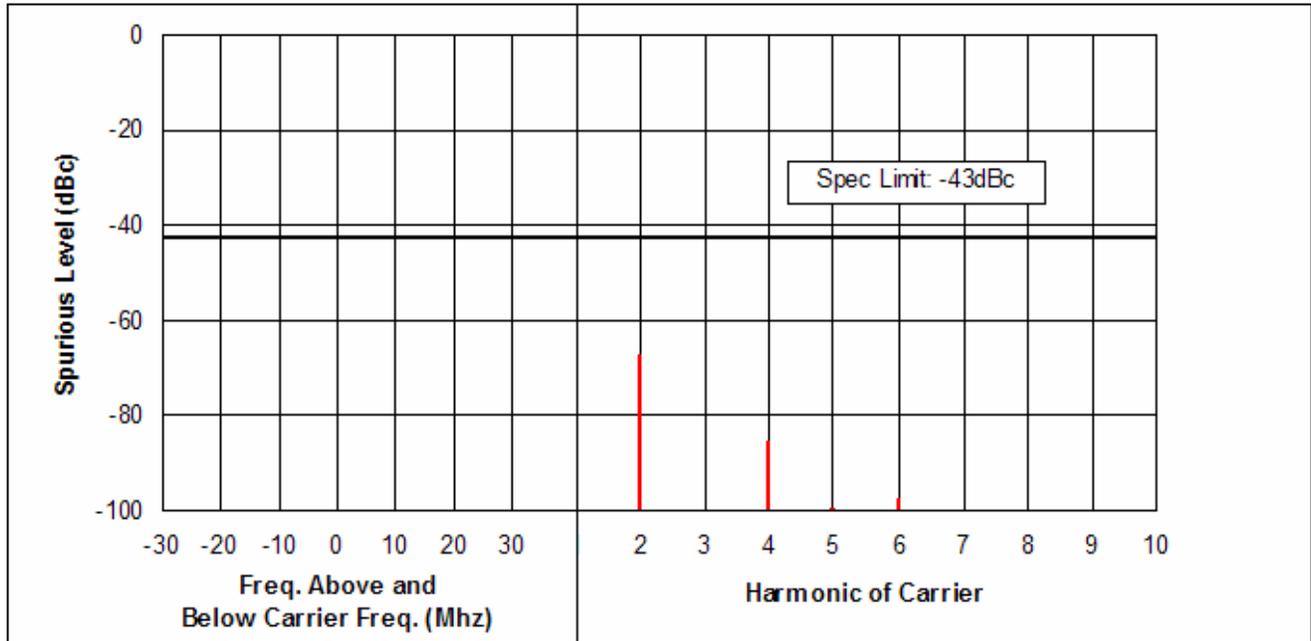


Table 6F-3: 1 Watt Harmonic of Carrier 823.9875 MHz

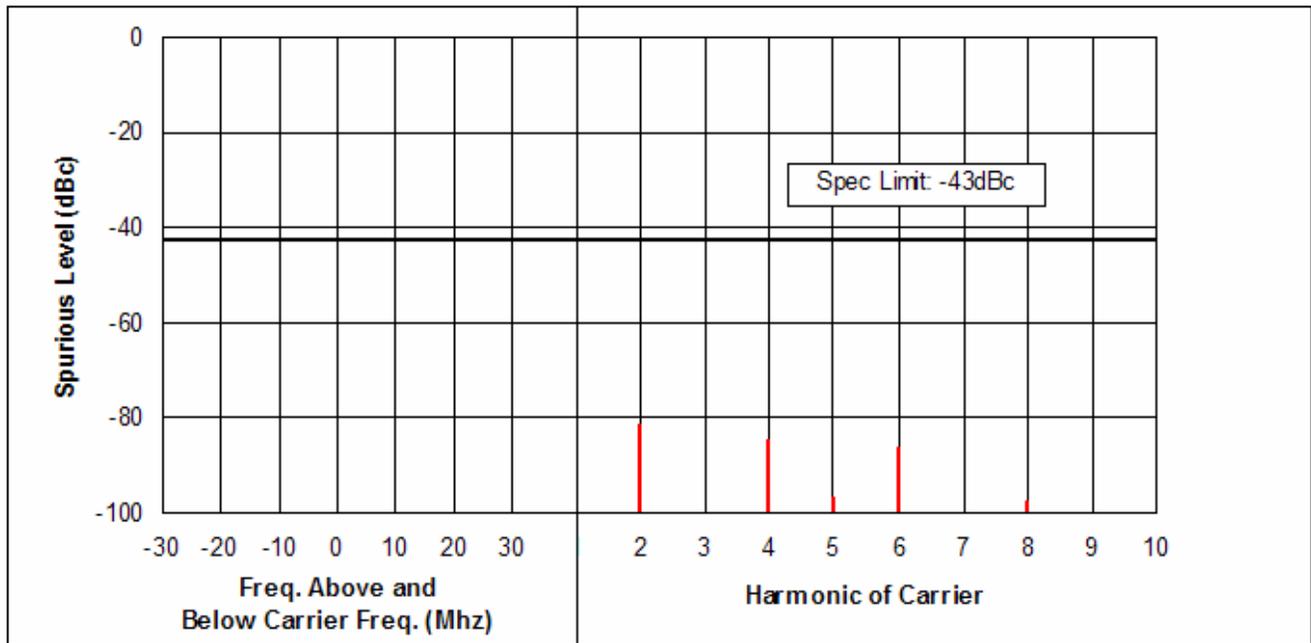


Table 6F-4: 1 Watt Harmonic of Carrier 851.0125 MHz

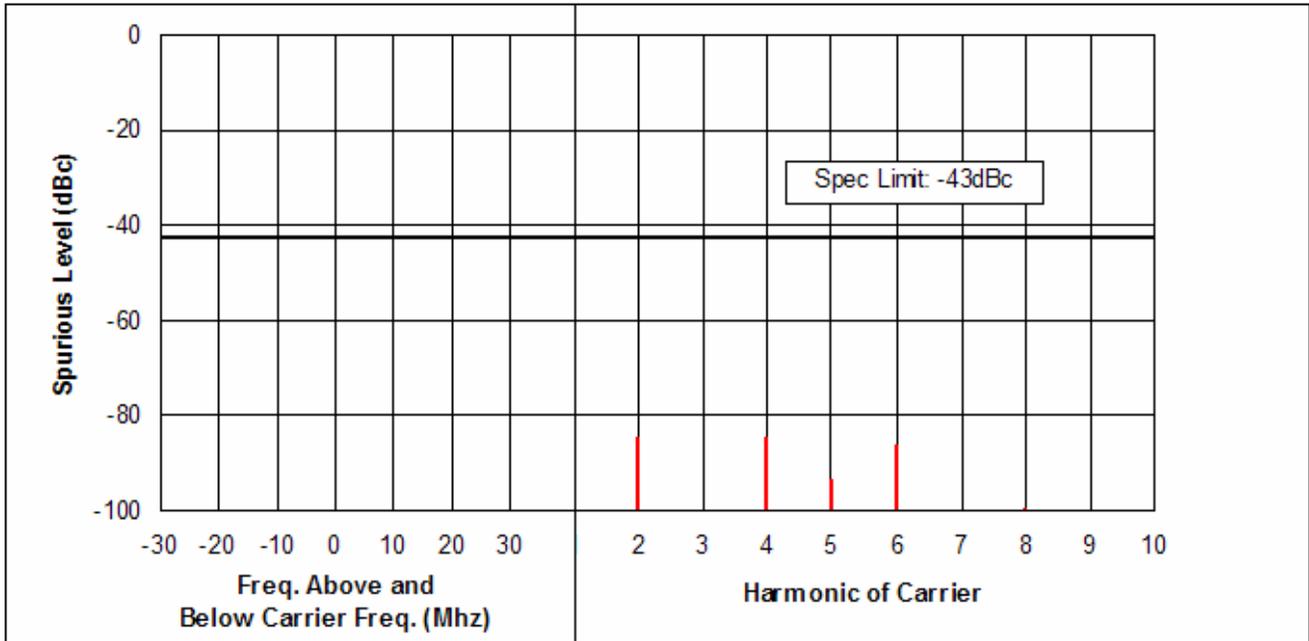


Table 6F-5: 1 Watt Harmonic of Carrier 860.0125 MHz

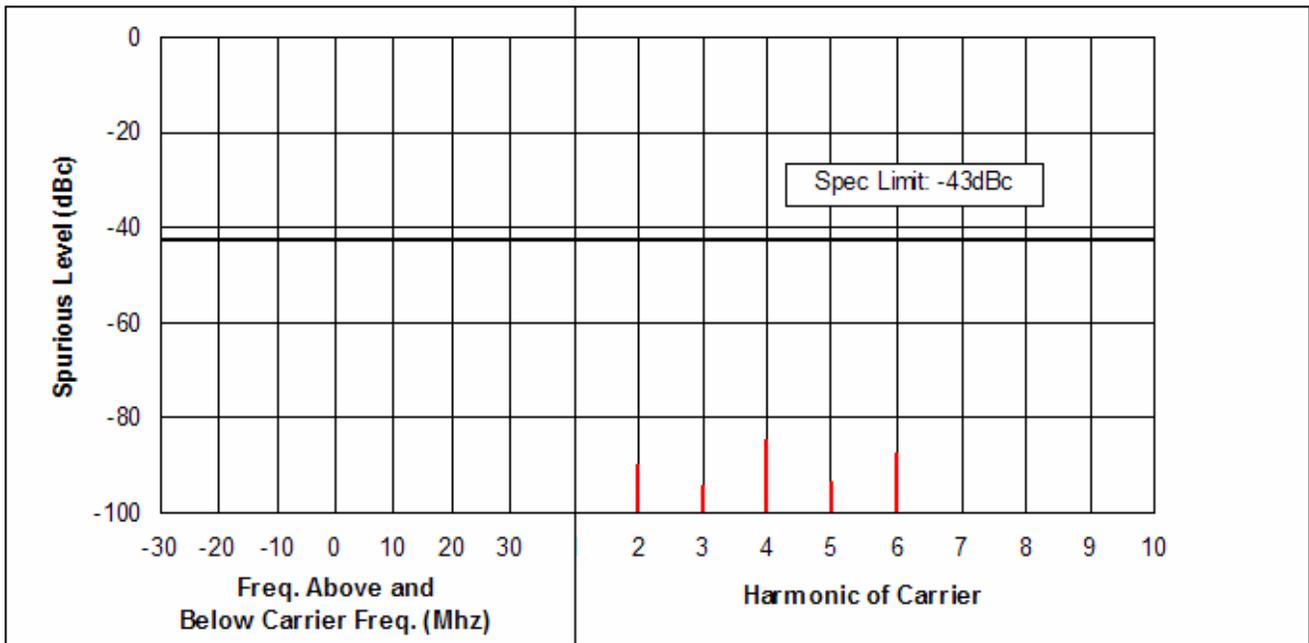


Table 6F-6: 1 Watt Harmonic of Carrier 869.0000 MHz

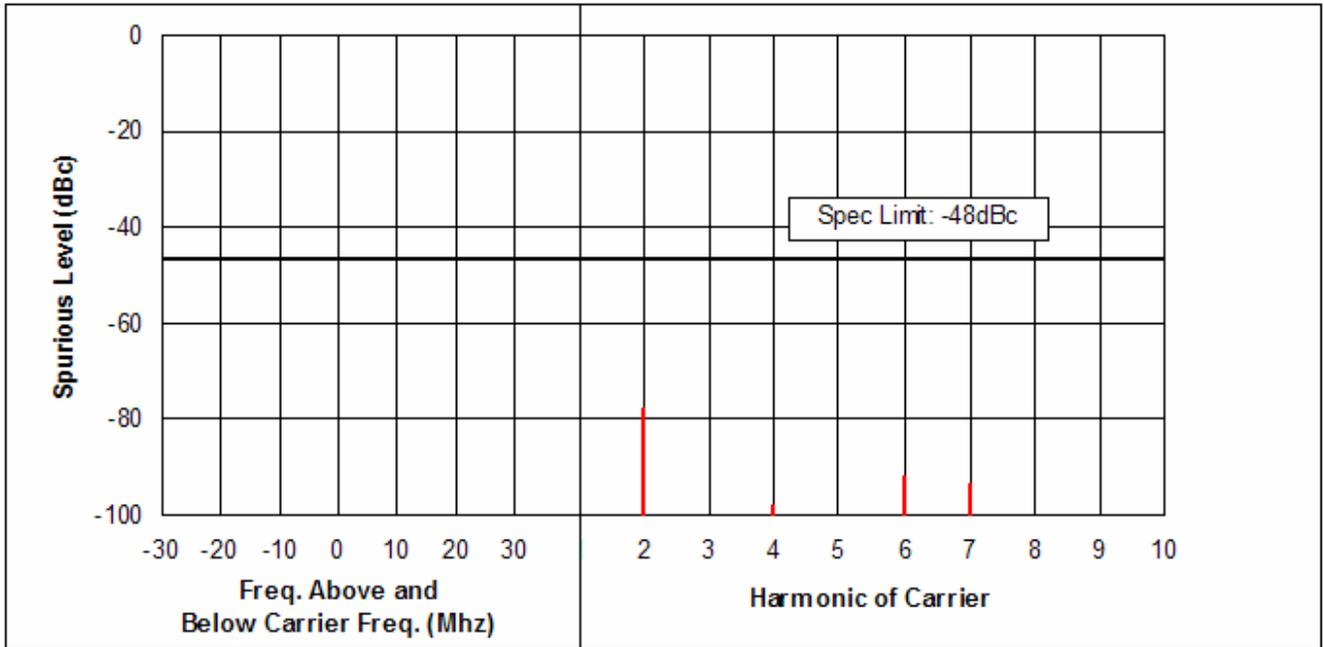


Table 6F-7: 2.95 Watt Harmonic of Carrier 806.0125 MHz

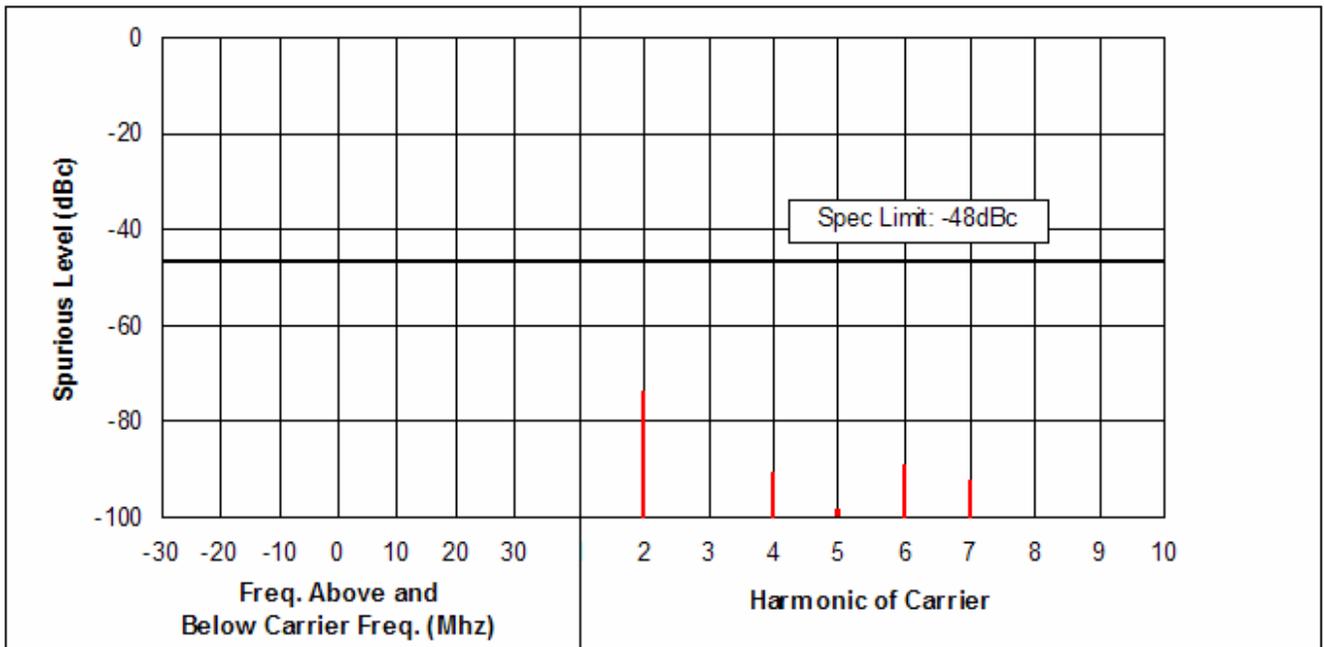


Table 6F-8: 2.95 Watt Harmonic of Carrier 815.0125 MHz

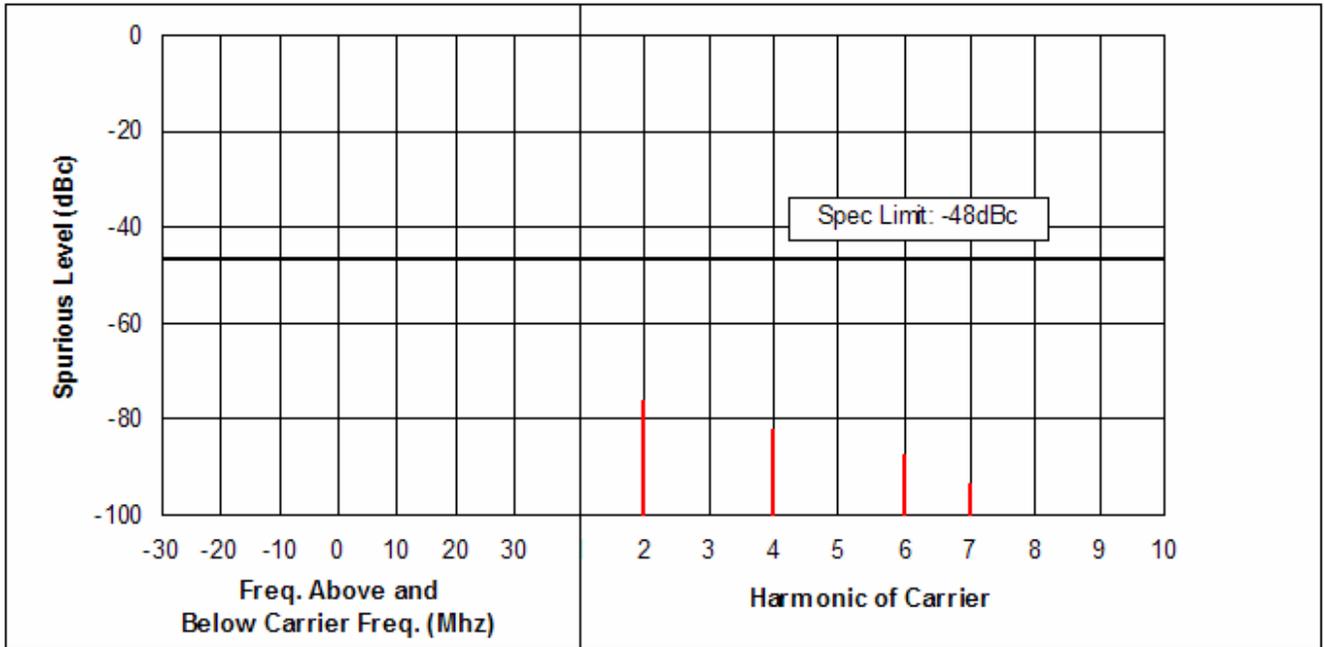


Table 6F-9: 2.95 Watt Harmonic of Carrier 823.9875 MHz

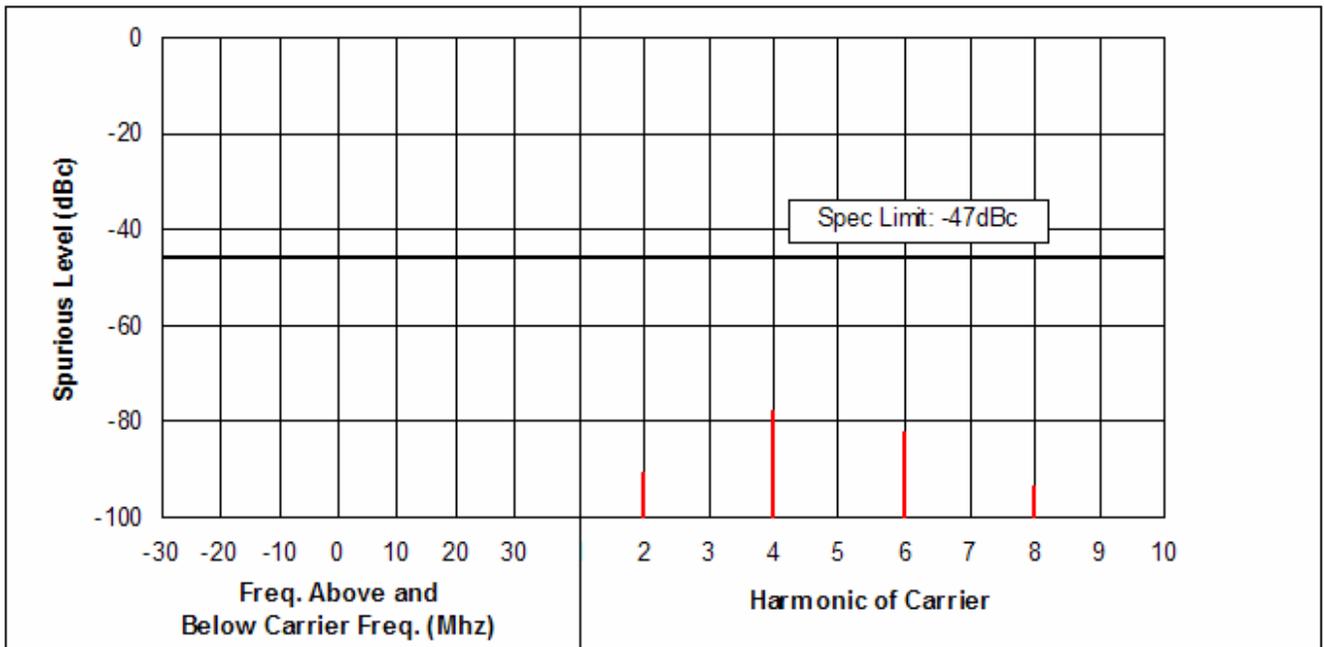


Table 6F-10: 2.40 Watt Harmonic of Carrier 851.0125 MHz

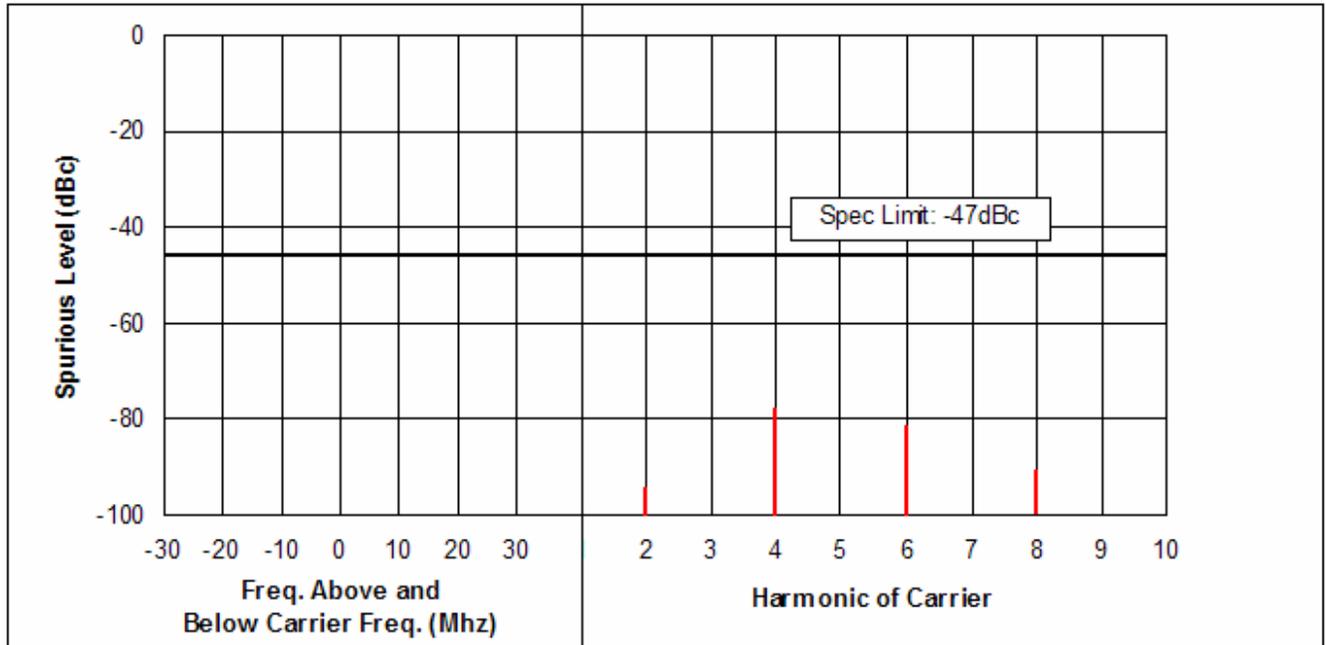


Table 6F-11: 2.40 Watt Harmonic of Carrier 860.0125 MHz

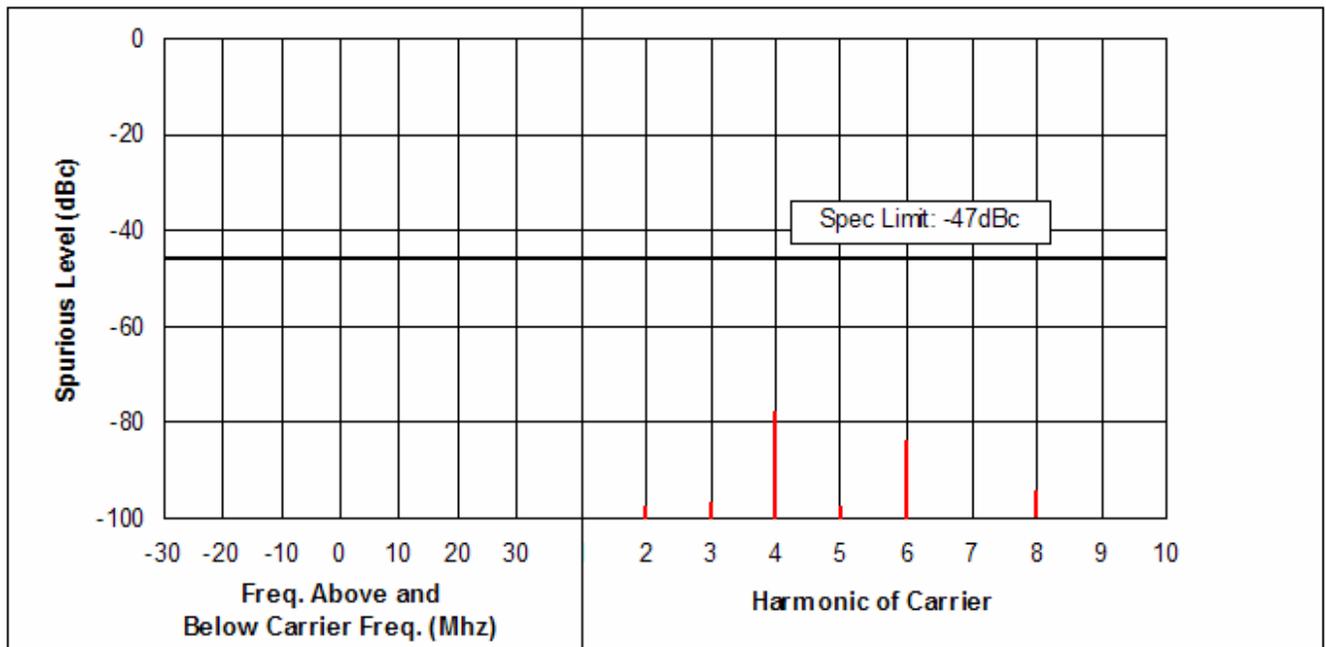


Table 6F-12: 2.40 Watt Harmonic of Carrier 869.0000 MHz

EXHIBIT 6G – Radiated Spurious Emissions - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

Notes: 1) The shown results are the worst case results for the given frequency. Measurements were made to the 10th harmonic, antenna polarization horizontal and vertical.

2) The margin [dB] is the amount in dB below the FCC specification limit of -13dBm (red line on graph)

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-13	-40.59	-35.47
2418.0375	-13	-48.63	-48.56
3224.0500	-13	-45.88	-49.99
4030.0625	-13	-37.50	-32.99
4836.0750	-13	-57.55	-53.85
5642.0875	-13	-47.97	-48.17
6448.1000	-13	-48.27	-45.82
7254.1125	-13	-49.75	-47.87
8060.1250	-13	-41.80	-45.33

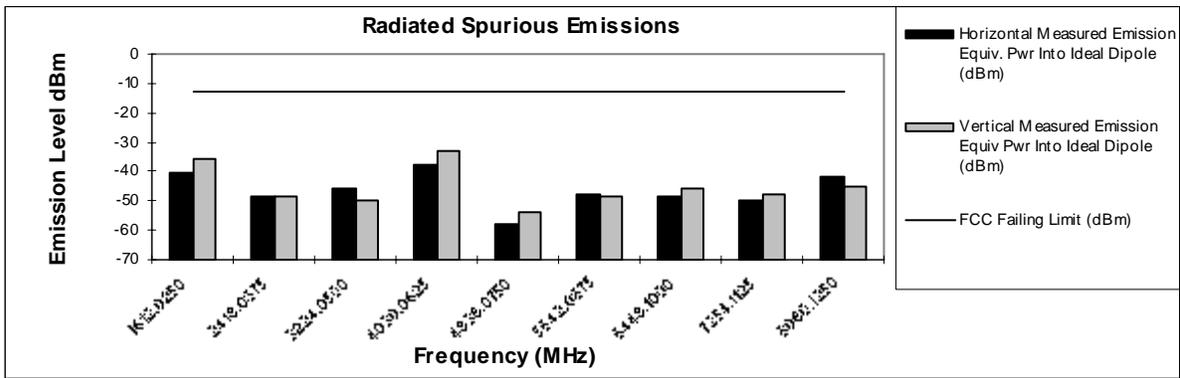


Figure 6G-1: 2.95 Watts, 806.0125MHz, 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1630.0250	-13	-39.31	-34.24
2445.0375	-13	-44.32	-46.08
3260.0500	-13	-34.00	-40.78
4075.0625	-13	-33.08	-33.98
4890.0750	-13	-56.86	-54.25
5705.0875	-13	-44.07	-41.31
6520.1000	-13	-49.82	-44.46
7335.1125	-13	-46.45	-45.85
8150.1250	-13	-47.17	*

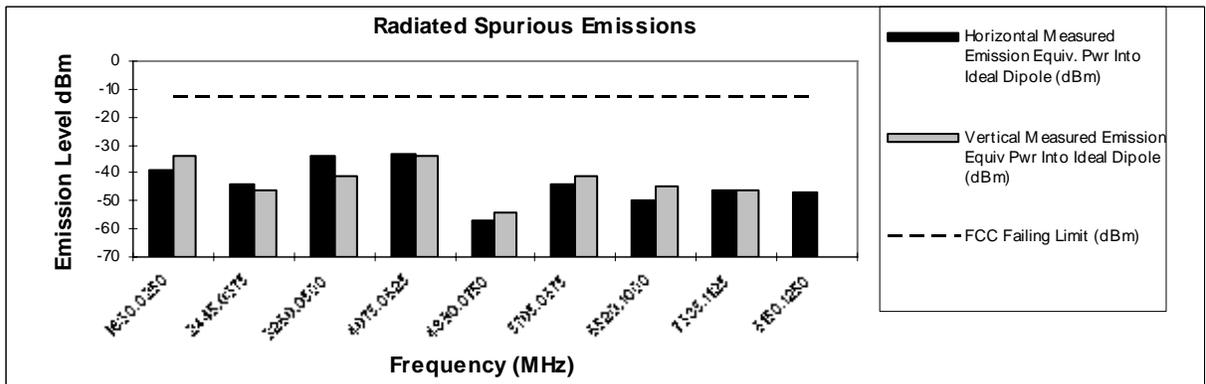


Figure 6G-2: 2.95 Watts, 815.0125MHz, 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1647.9750	-13	-39.17	-35.35
2471.9625	-13	-44.09	-43.12
3295.9500	-13	-28.59	-35.42
4119.9375	-13	-30.29	-31.52
4943.9250	-13	-51.49	-51.30
5767.9125	-13	-40.05	-38.32
6591.9000	-13	-50.37	-43.34
7415.8875	-13	-45.22	-42.03
8239.8750	-13	-46.28	*

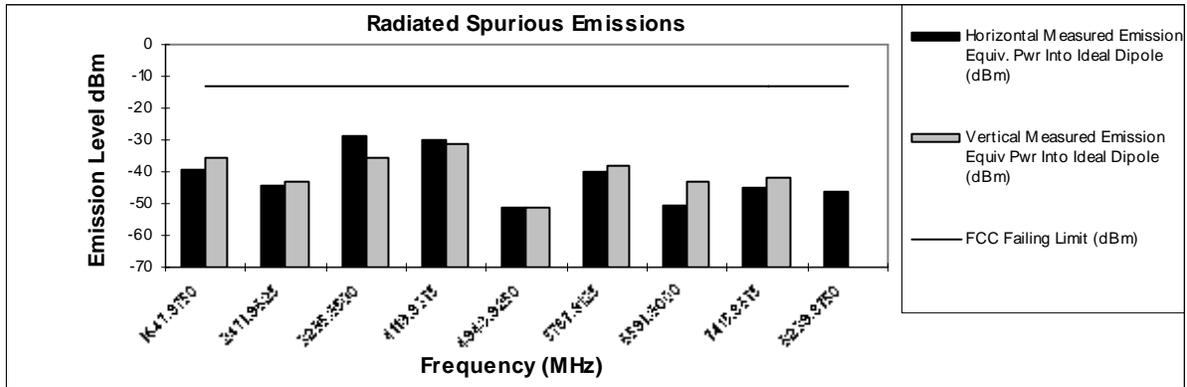


Figure 6G-3: 2.95 Watts, 823.9875MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1702.0250	-13	-22.70	-18.57
2553.0375	-13	-32.88	-34.39
3404.0500	-13	-33.99	-38.08
4255.0625	-13	-39.52	-44.58
5106.0750	-13	-48.02	-50.99
5957.0875	-13	-49.34	-48.90
6808.1000	-13	-51.26	-46.40
7659.1125	-13	-50.66	-52.35
8510.1250	-13	*	*

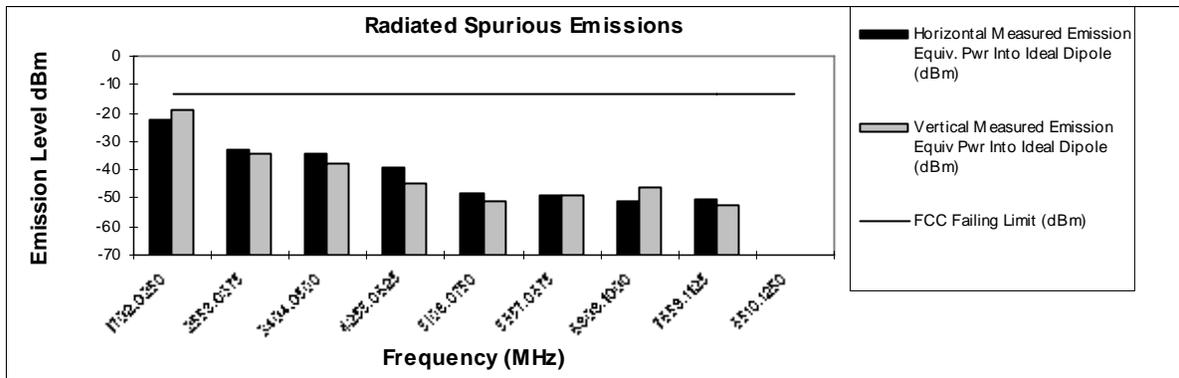


Figure 6G-4: 2.4 Watts, 851.0125MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1720.0250	-13	-21.56	-21.99
2580.0375	-13	-35.34	-38.19
3440.0500	-13	-31.67	-34.39
4300.0625	-13	-39.31	-44.01
5160.0750	-13	-49.70	-51.68
6020.0875	-13	-47.88	-49.71
6880.1000	-13	-49.24	-47.84
7740.1125	-13	*	*
8600.1250	-13	*	*

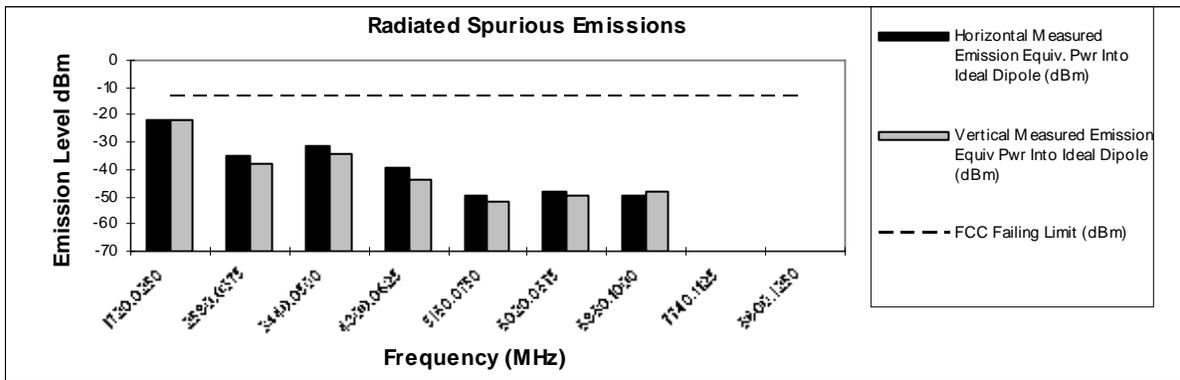


Figure 6G-5: 2.4 Watts, 860.0125MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.9750	-13	-21.93	-20.75
2606.9625	-13	-41.68	-39.98
3475.9500	-13	-37.67	-37.41
4344.9375	-13	-41.69	-46.14
5213.9250	-13	-46.91	-48.80
6082.9125	-13	-49.01	-50.81
6951.9000	-13	-48.73	-48.53
7820.8875	-13	-48.95	-51.45
8689.8750	-13	*	*

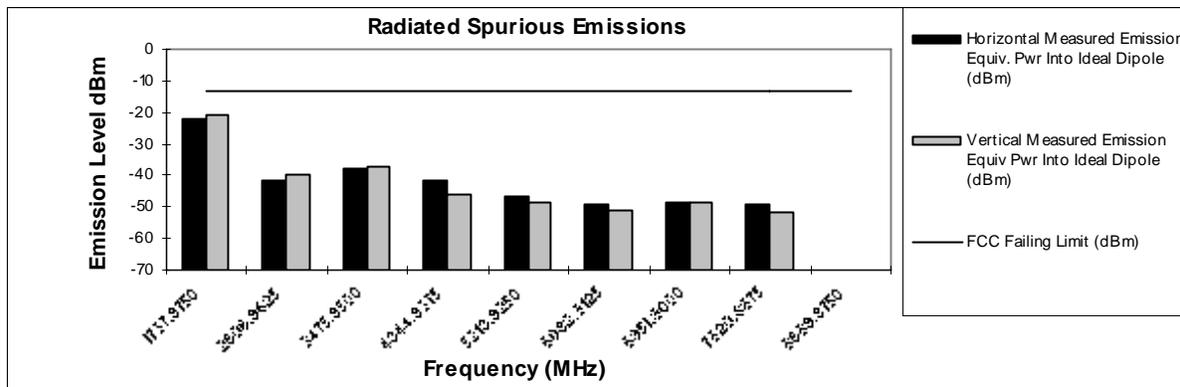


Figure 6G-6: 2.4 Watts, 868.9875MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1612.0250	-13	-32.67	-28.75
2418.0375	-13	-53.64	-54.76
3224.0500	-13	-46.62	-51.54
4030.0625	-13	-36.24	-35.95
4836.0750	-13	-49.98	-52.69
5642.0875	-13	-51.59	-48.11
6448.1000	-13	-49.77	-45.53
7254.1125	-13	-46.40	-46.93
8060.1250	-13	-43.41	-44.78

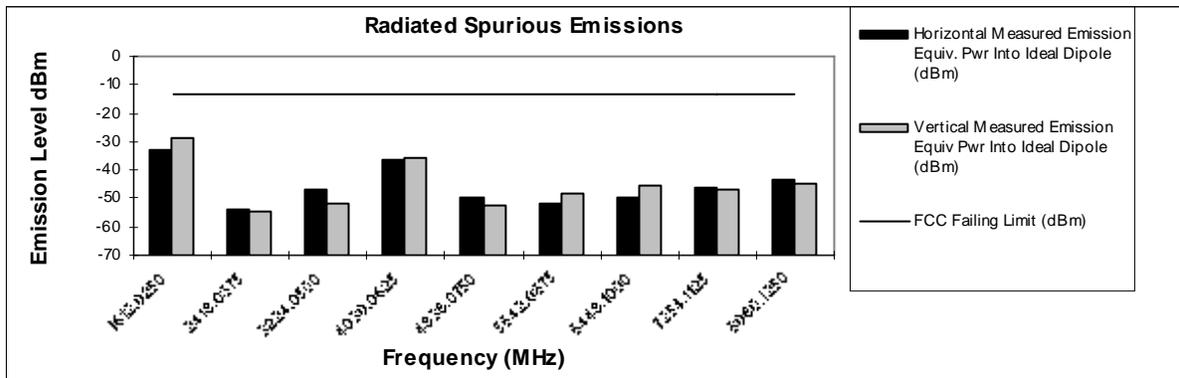


Figure 6G-7: 1 Watt, 806.0125MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1630.0250	-13	-35.35	-28.39
2445.0375	-13	-51.21	-53.29
3260.0500	-13	-37.10	-44.79
4075.0625	-13	-30.08	-34.97
4890.0750	-13	-47.02	-51.61
5705.0875	-13	-48.56	-47.32
6520.1000	-13	-50.67	-45.20
7335.1125	-13	-46.07	-46.01
8150.1250	-13	-44.55	-43.71

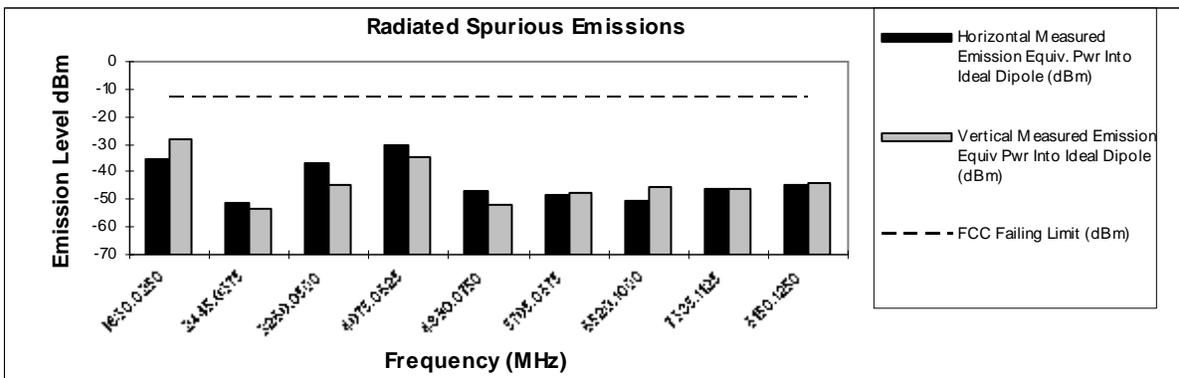


Figure 6G-8: 1 Watt, 815.0125MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1647.9750	-13	-37.58	-31.74
2471.9625	-13	-48.01	-47.72
3295.9500	-13	-36.22	-43.97
4119.9375	-13	-31.92	-31.14
4943.9250	-13	-46.89	-52.81
5767.9125	-13	-53.14	-50.17
6591.9000	-13	-51.34	*
7415.8875	-13	-45.31	-44.87
8239.8750	-13	-47.78	*

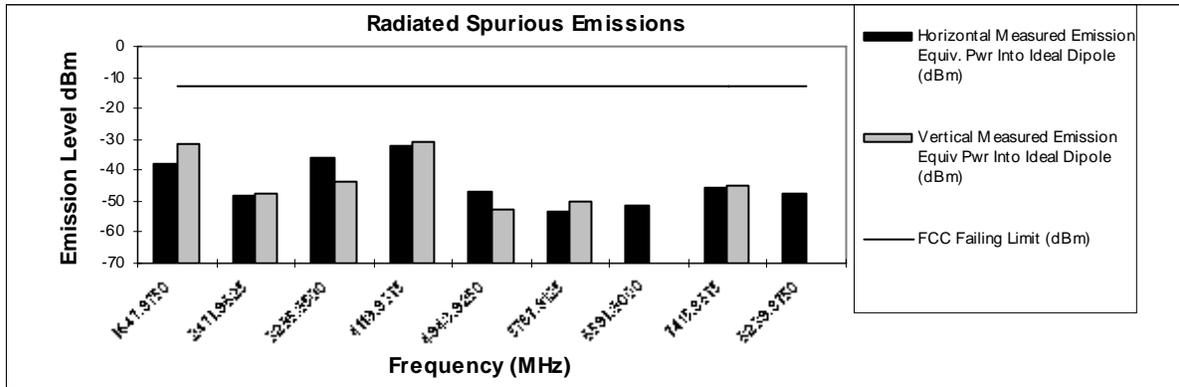


Figure 6G-9: 1 Watt, 823.9875MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1702.0250	-13	-18.06	-17.91
2553.0375	-13	-34.20	-37.19
3404.0500	-13	-32.82	-47.04
4255.0625	-13	-21.28	-19.28
5106.0750	-13	-46.57	-52.59
5957.0875	-13	-50.48	-51.32
6808.1000	-13	-48.67	-50.12
7659.1125	-13	-40.25	-40.24
8510.1250	-13	*	*

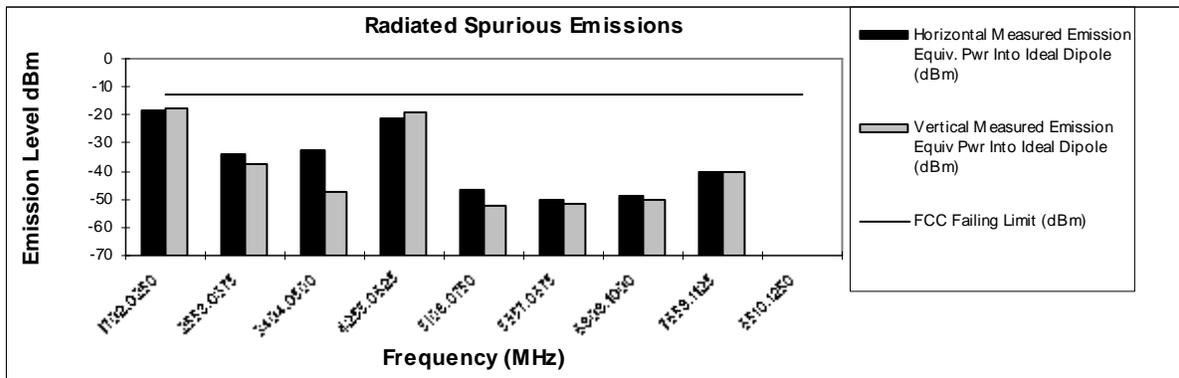


Figure 6G-10: 1 Watt, 851.0125MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1720.0250	-13	-14.95	-18.58
2580.0375	-13	-38.98	-39.41
3440.0500	-13	-29.66	-33.00
4300.0625	-13	-23.67	-24.65
5160.0750	-13	-48.28	-51.84
6020.0875	-13	-49.00	-52.86
6880.1000	-13	-46.73	-47.95
7740.1125	-13	-44.81	-44.18
8600.1250	-13	*	*

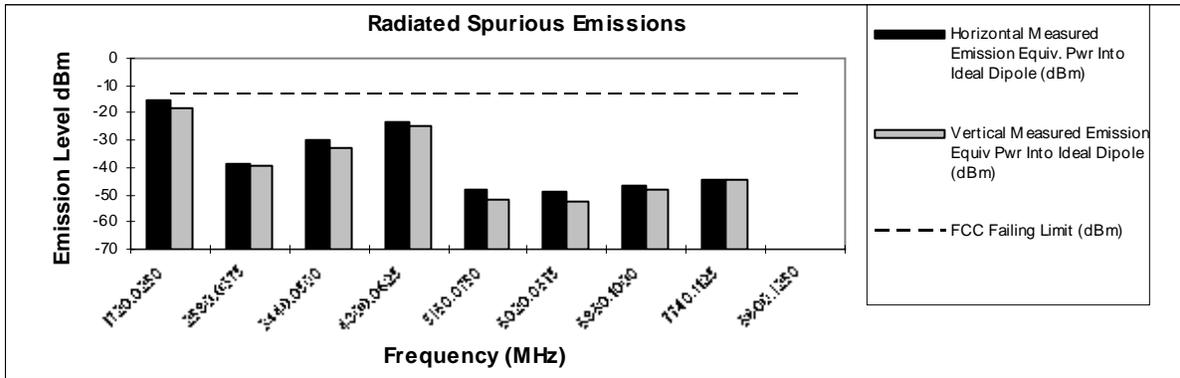


Figure 6G-11: 1 Watt, 860.0125MHz 25 kHz Channel Spacing

Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1737.9750	-13	-19.70	-16.15
2606.9625	-13	-39.50	-44.38
3475.9500	-13	-29.36	-41.71
4344.9375	-13	-25.77	-27.25
5213.9250	-13	-48.90	-53.43
6082.9125	-13	-49.48	-52.14
6951.9000	-13	-45.46	-45.67
7820.8875	-13	-44.88	-47.12
8689.8750	-13	*	*

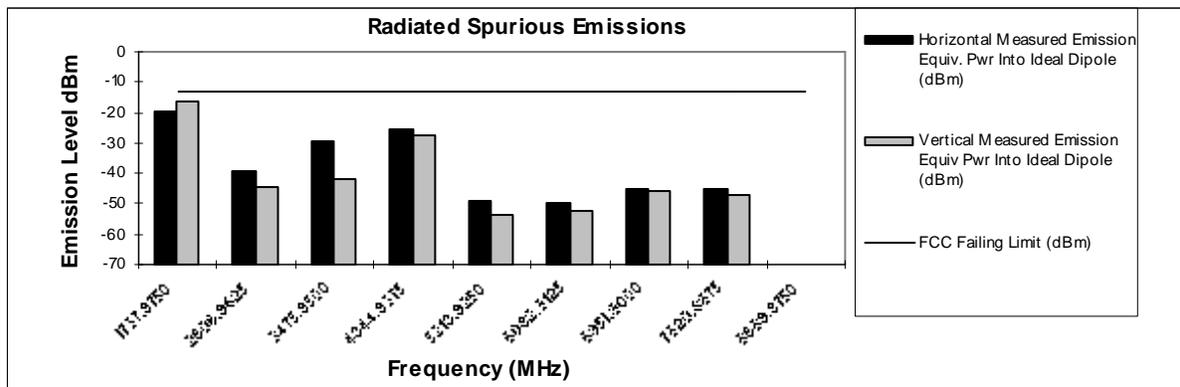


Figure 6G-12: 1 Watt, 868.9875MHz 25 kHz Channel Spacing

EXHIBIT 6H – Frequency Stability - Pursuant 47 CFR 2.1047 and 2.1033(c)(13)

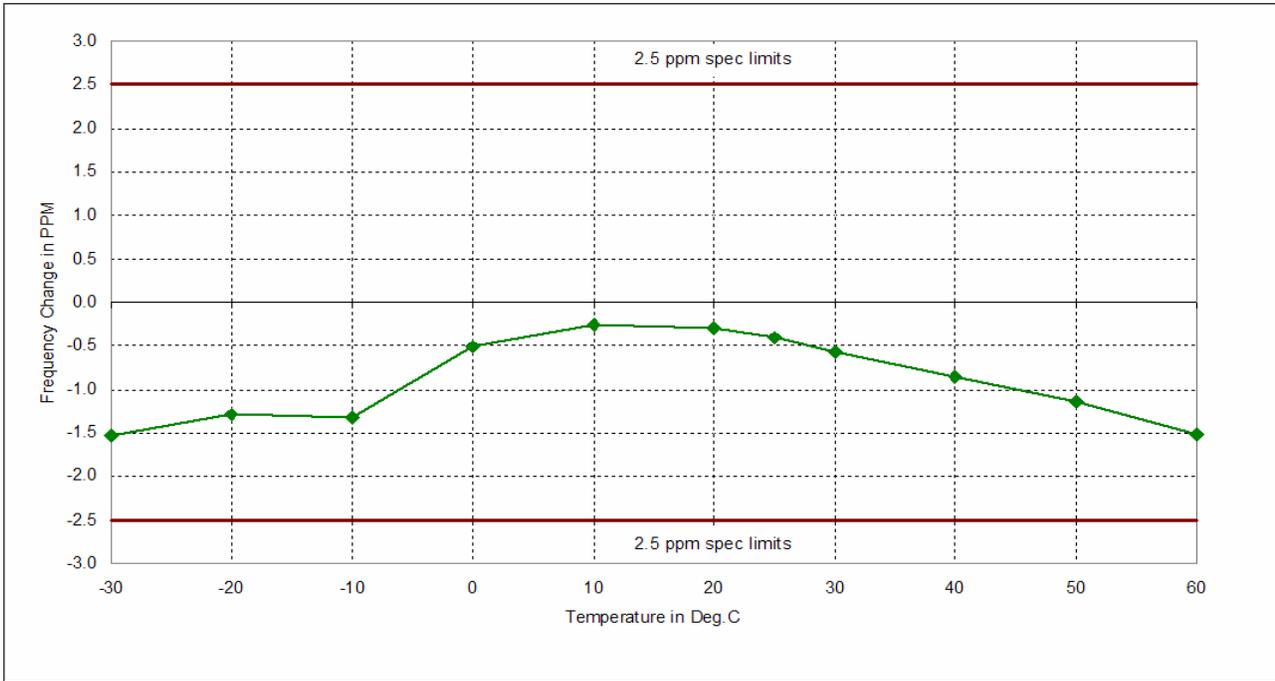


Figure 6H-1: Frequency Stability vs. Temperature

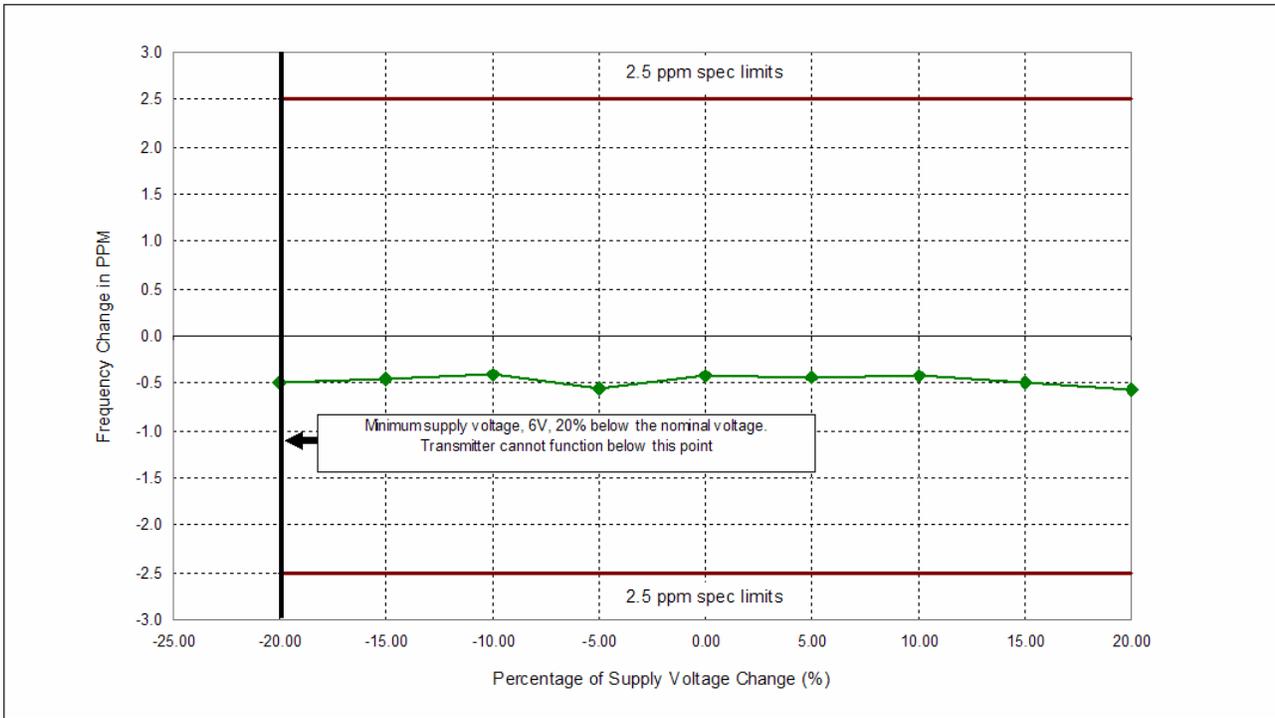


Figure 6H-2: Frequency Stability vs. Voltage

EXHIBIT 6I - Power Line Conducted Spurious Emissions - Pursuant to FCC Rules Part 15.107

Radio Off
Result Table_Single

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.174500	64.0	36.5	9000.000	GND	L1
0.262000	58.8	28.7	9000.000	GND	L1
0.314000	56.1	24.3	9000.000	GND	L1
0.402000	49.4	23.4	9000.000	GND	L1
0.414000	47.6	16.9	9000.000	GND	L1
0.454000	41.1	10.7	9000.000	GND	L1
0.522000	45.3	13.9	9000.000	GND	L1
0.550000	45.3	14.8	9000.000	GND	L1
0.602000	42.7	12.9	9000.000	GND	L1
0.174500	64.1	35.0	9000.000	GND	N
0.262000	59.1	28.4	9000.000	GND	N
0.314000	55.9	17.4	9000.000	GND	N
0.402000	50.9	22.2	9000.000	GND	N
0.414000	49.1	18.4	9000.000	GND	N
0.454000	45.7	14.3	9000.000	GND	N
0.522000	46.3	13.8	9000.000	GND	N
0.550000	46.8	14.4	9000.000	GND	N
0.602000	44.1	12.9	9000.000	GND	N

Radio Off Failing Limits [Pass Fail] – CLASS A LIMITS

Frequency	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
<= 500kHz							
174500	64	79	15	36.5	66	29.5	L1
262000	58.8	79	20.2	28.7	66	37.3	L1
314000	56.1	79	22.9	24.3	66	41.7	L1
402000	49.4	79	29.6	23.4	66	42.6	L1
414000	47.6	79	31.4	16.9	66	49.1	L1
454000	41.1	79	37.9	10.7	66	55.3	L1
174500	64.1	79	14.9	35	66	31	N
262000	59.1	79	19.9	28.4	66	37.6	N
314000	55.9	79	23.1	17.4	66	48.6	N
402000	50.9	79	28.1	22.2	66	43.8	N
414000	49.1	79	29.9	18.4	66	47.6	N
454000	45.7	79	33.3	14.3	66	51.7	N
500kHz - 5MHz							
522000	45.3	73	27.7	13.9	60	46.1	L1
550000	45.3	73	27.7	14.8	60	45.2	L1
602000	42.7	73	30.3	12.9	60	47.1	L1
522000	46.3	73	26.7	13.8	60	46.2	N
550000	46.8	73	26.2	14.4	60	45.6	N
602000	44.1	73	28.9	12.9	60	47.1	N

Figure 6I-1: Radio Off Line/Neutral

Radio Rx 851.0125 MHz
Result Table_Single

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.154000	65.7	36.6	9000.000	GND	L1
0.270000	58.0	28.0	9000.000	GND	L1
0.322000	55.9	26.9	9000.000	GND	L1
0.330000	55.7	24.4	9000.000	GND	L1
0.346000	55.0	24.3	9000.000	GND	L1
0.354000	54.7	23.8	9000.000	GND	L1
0.534000	43.8	11.8	9000.000	GND	L1
0.558000	43.6	13.9	9000.000	GND	L1
0.154000	66.0	36.1	9000.000	GND	N
0.270000	58.9	28.5	9000.000	GND	N
0.322000	55.9	27.0	9000.000	GND	N
0.330000	55.2	24.4	9000.000	GND	N
0.346000	54.6	23.5	9000.000	GND	N
0.354000	54.3	14.5	9000.000	GND	N
0.534000	43.6	13.6	9000.000	GND	N
0.558000	45.0	14.3	9000.000	GND	N

Rx 851.0125 MHz Failing Limits [Pass Fail] – CLASS A

Frequency	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
<= 500kHz							
154000	65.7	79	13.3	36.6	66	29.4	L1
270000	58	79	21	28	66	38	L1
322000	55.9	79	23.1	26.9	66	39.1	L1
330000	55.7	79	23.3	24.4	66	41.6	L1
346000	55	79	24	24.3	66	41.7	L1
354000	54.7	79	24.3	23.8	66	42.2	L1
154000	66	79	13	36.1	66	29.9	N
270000	58.9	79	20.1	28.5	66	37.5	N
322000	55.9	79	23.1	27	66	39	N
330000	55.2	79	23.8	24.4	66	41.6	N
346000	54.6	79	24.4	23.5	66	42.5	N
354000	54.3	79	24.7	14.5	66	51.5	N
500kHz - 5MHz							
534000	43.8	73	29.2	11.8	60	48.2	L1
558000	43.6	73	29.4	13.9	60	46.1	L1
534000	43.6	73	29.4	13.6	60	46.4	N
558000	45	73	28	14.3	60	45.7	N

Figure 6I-2: Radio on RX Line/Neutral

Radio Tx 806.0125 MHz
Result Table_Single

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Bandwidth (Hz)	PE	Line
0.186000	64.3	35.0	9000.000	GND	L1
0.210000	62.2	32.5	9000.000	GND	L1
0.274000	58.0	30.9	9000.000	GND	L1
0.302000	56.6	28.4	9000.000	GND	L1
0.478000	43.3	14.5	9000.000	GND	L1
0.538000	44.2	12.2	9000.000	GND	L1
0.186000	64.8	29.7	9000.000	GND	N
0.210000	62.3	34.0	9000.000	GND	N
0.274000	58.4	27.9	9000.000	GND	N
0.302000	56.3	26.8	9000.000	GND	N
0.478000	43.8	13.6	9000.000	GND	N
0.538000	45.4	13.8	9000.000	GND	N

Tx 806.0125 MHz Failing Limits [Pass Fail] – CLASS A

Frequency	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
<= 500kHz							
186000	64.3	79	14.7	35	66	31	L1
210000	62.2	79	16.8	32.5	66	33.5	L1
274000	58	79	21	30.9	66	35.1	L1
302000	56.6	79	22.4	28.4	66	37.6	L1
478000	43.3	79	35.7	14.5	66	51.5	L1
186000	64.8	79	14.2	29.7	66	36.3	N
210000	62.3	79	16.7	34	66	32	N
274000	58.4	79	20.6	27.9	66	38.1	N
302000	56.3	79	22.7	26.8	66	39.2	N
478000	43.8	79	35.2	13.6	66	52.4	N
500kHz - 5MHz							
538000	44.2	73	28.8	12.2	60	47.8	L1
538000	45.4	73	27.6	13.8	60	46.2	N

Figure 6I-3: Radio on TX Line/Neutral