

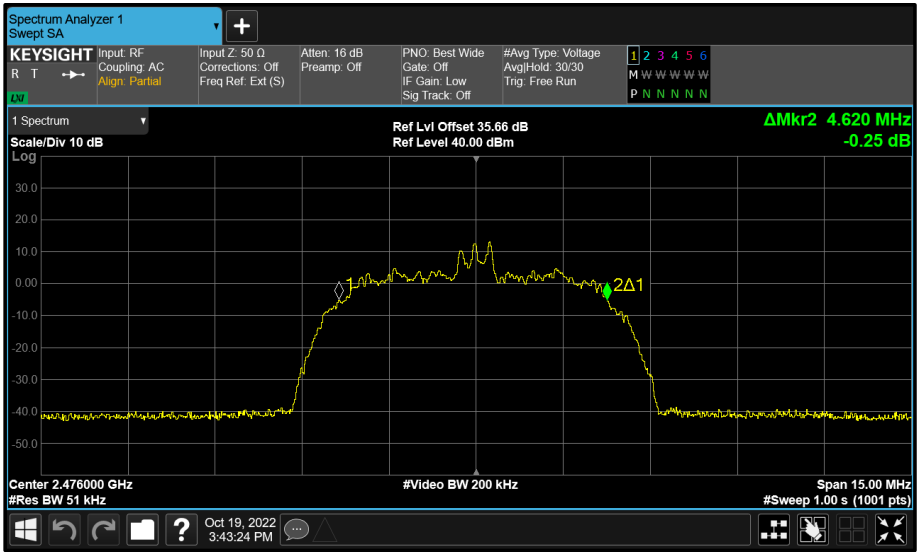


Figure 65 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

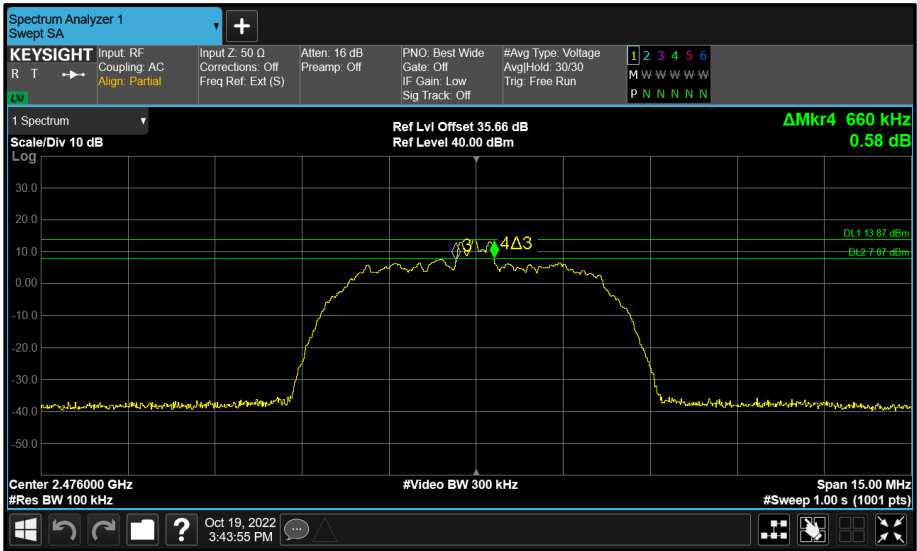


Figure 66 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth

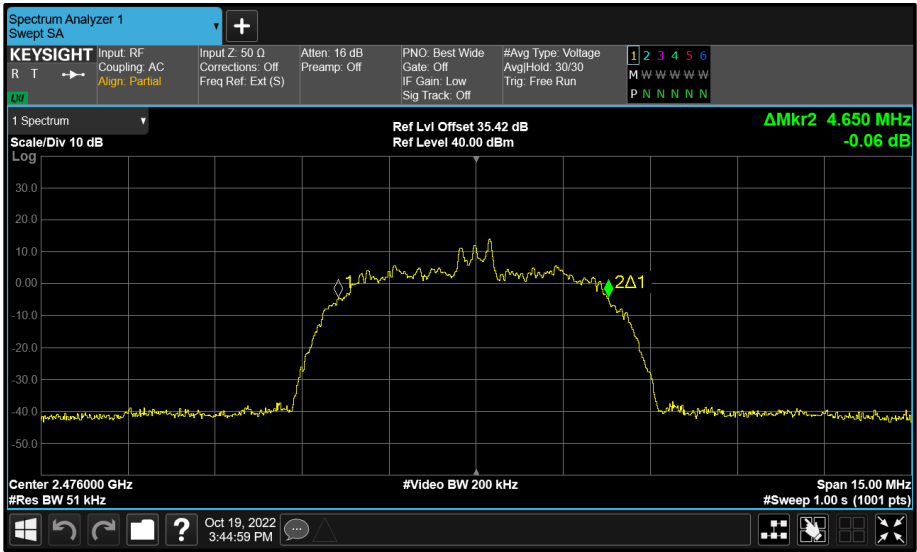


Figure 67 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

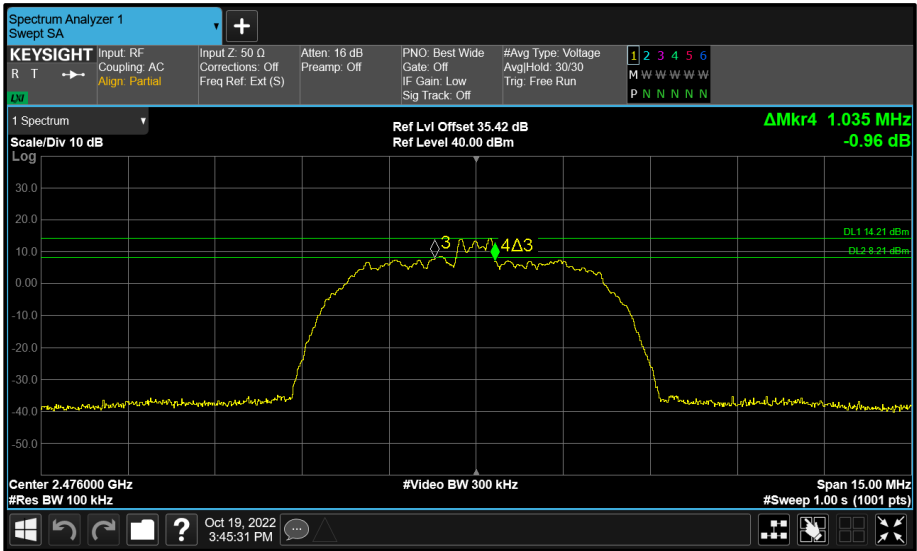


Figure 68 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	1.888	-	-	≥ 500.0
2441	-	1.888	-	-	≥ 500.0
2476	-	1.896	-	-	≥ 500.0

Table 34 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	2.320	-	-	-
2441	-	2.320	-	-	-
2476	-	2.328	-	-	-

Table 35 - 99% Bandwidth Results

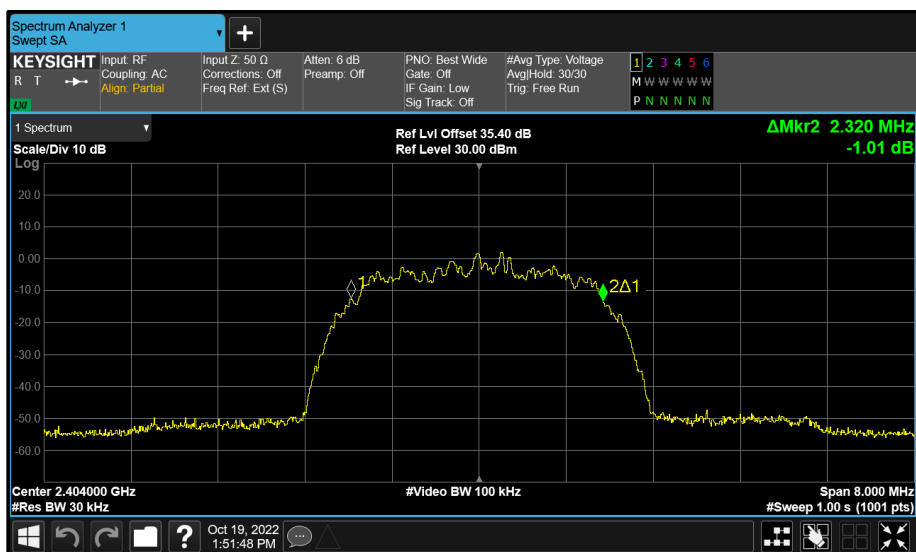


Figure 69 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

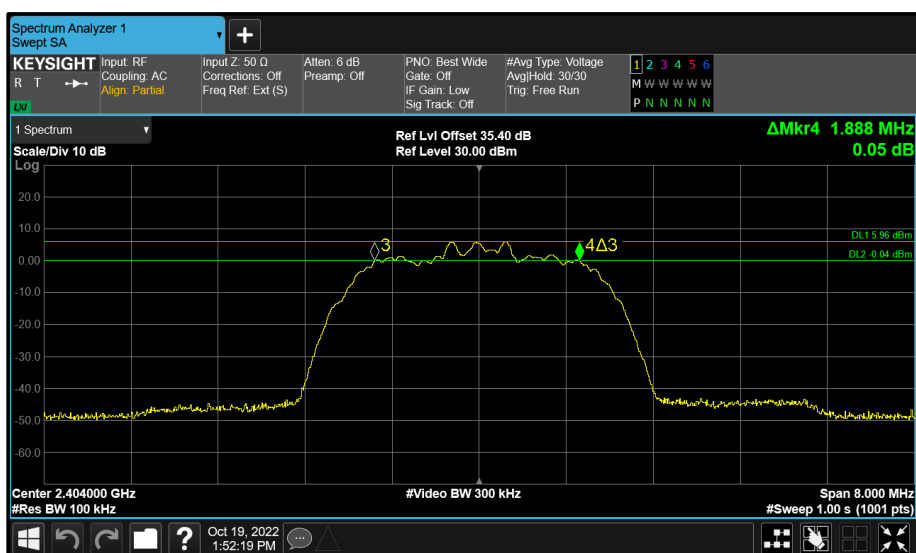


Figure 70 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

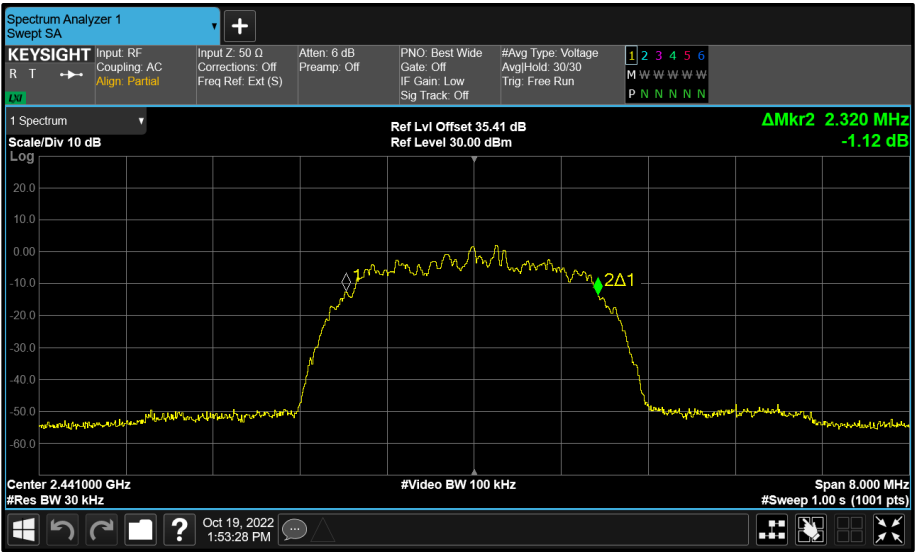


Figure 71 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

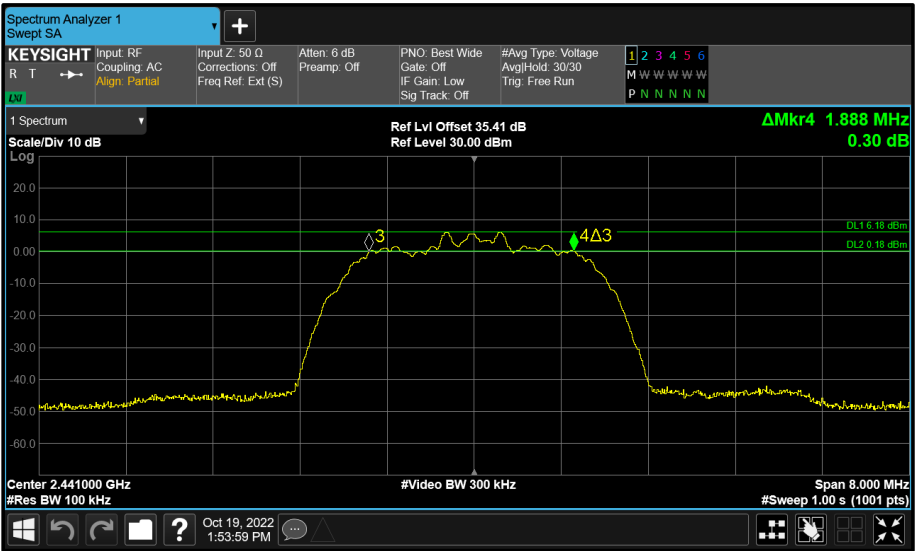


Figure 72 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

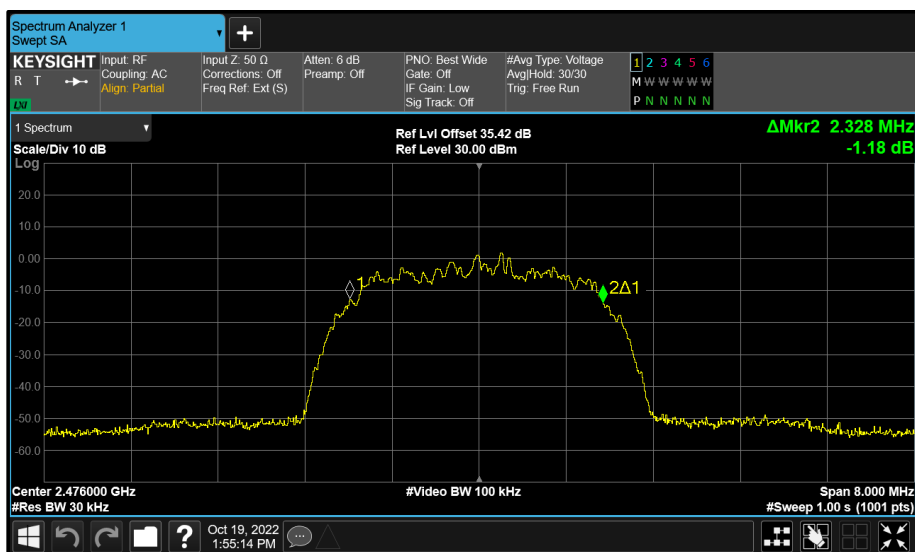


Figure 73 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

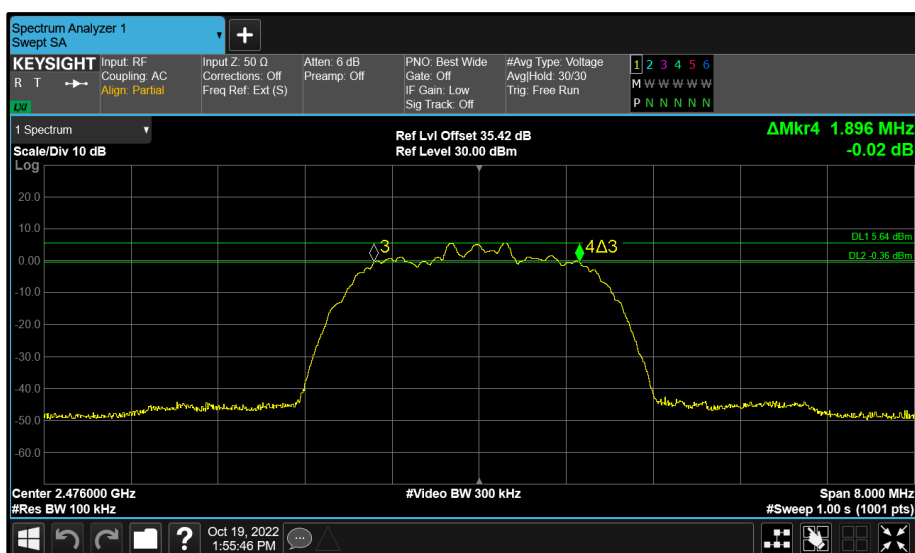


Figure 74 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	0.945	-	-	≥ 500.0
2441	-	1.020	-	-	≥ 500.0
2476	-	1.020	-	-	≥ 500.0

Table 36 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	4.650	-	-	-
2441	-	4.635	-	-	-
2476	-	4.635	-	-	-

Table 37 - 99% Bandwidth Results

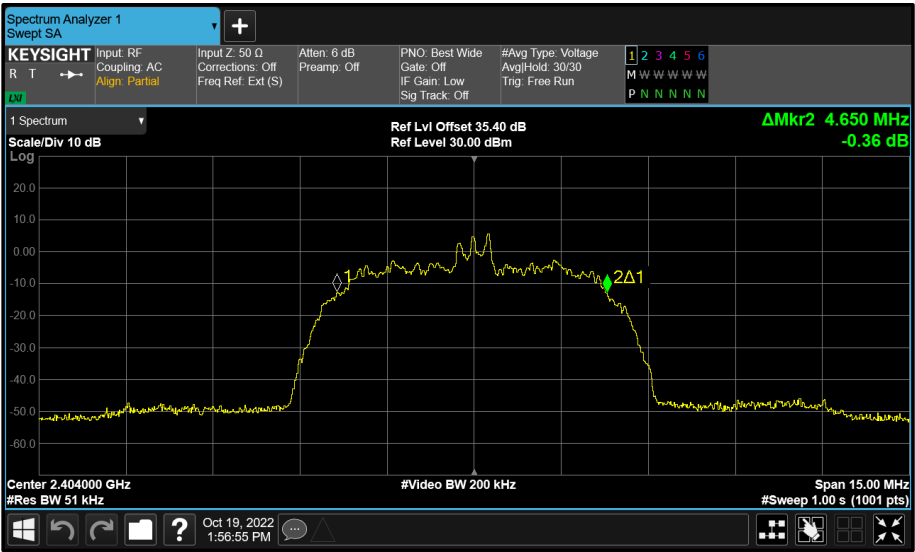


Figure 75 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

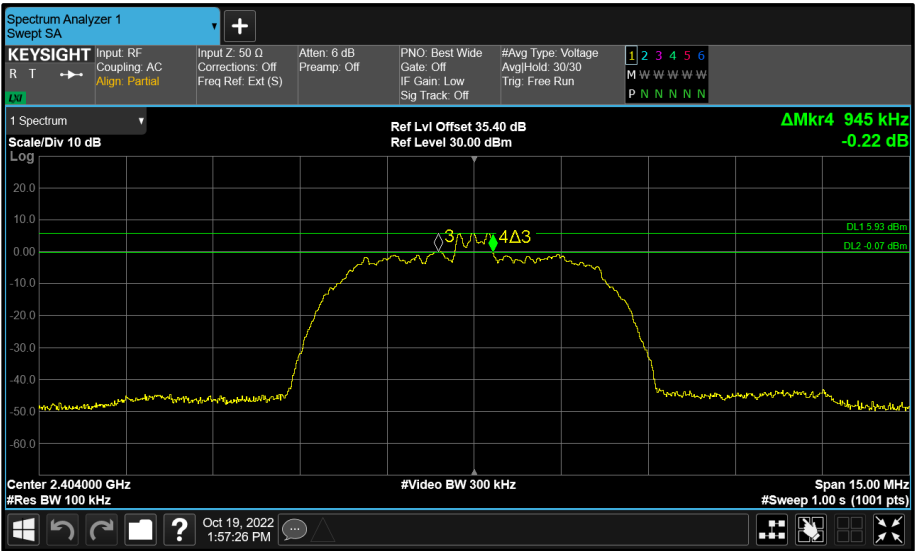


Figure 76 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

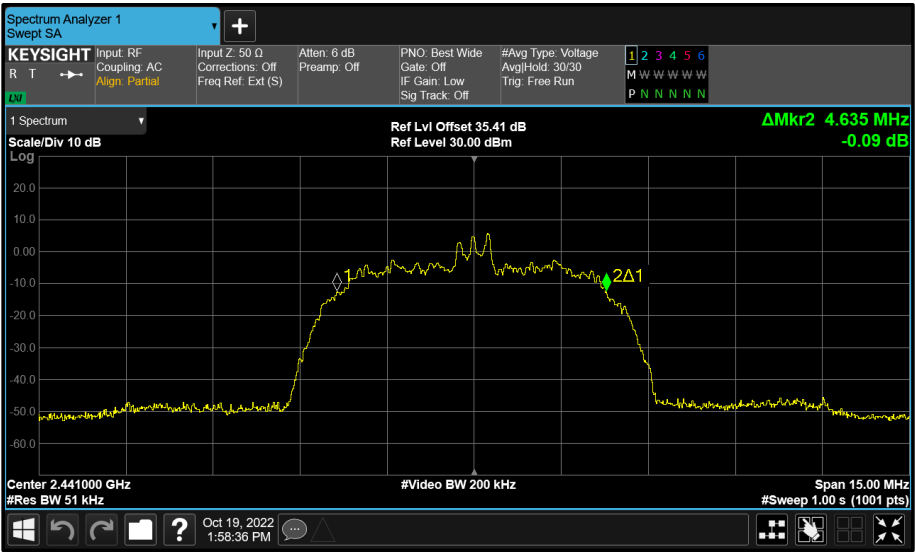


Figure 77 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

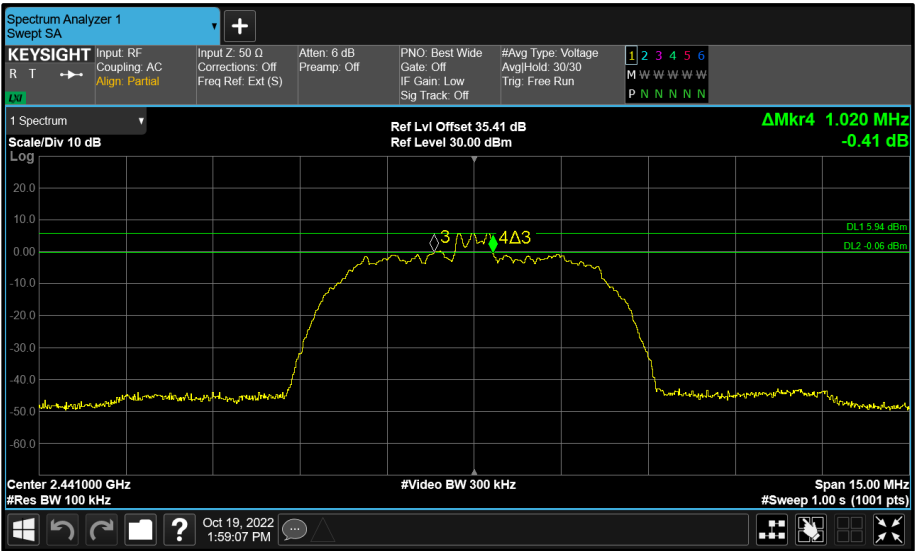


Figure 78 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

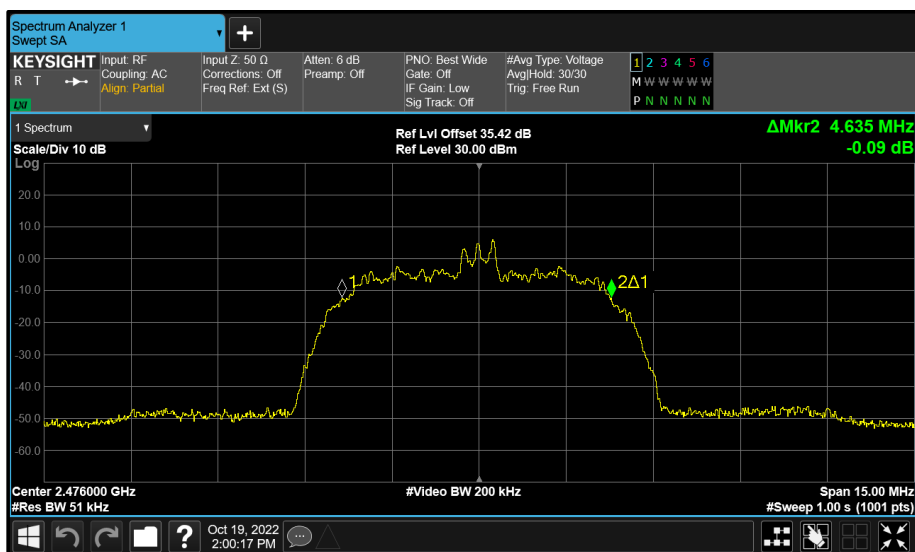


Figure 79 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

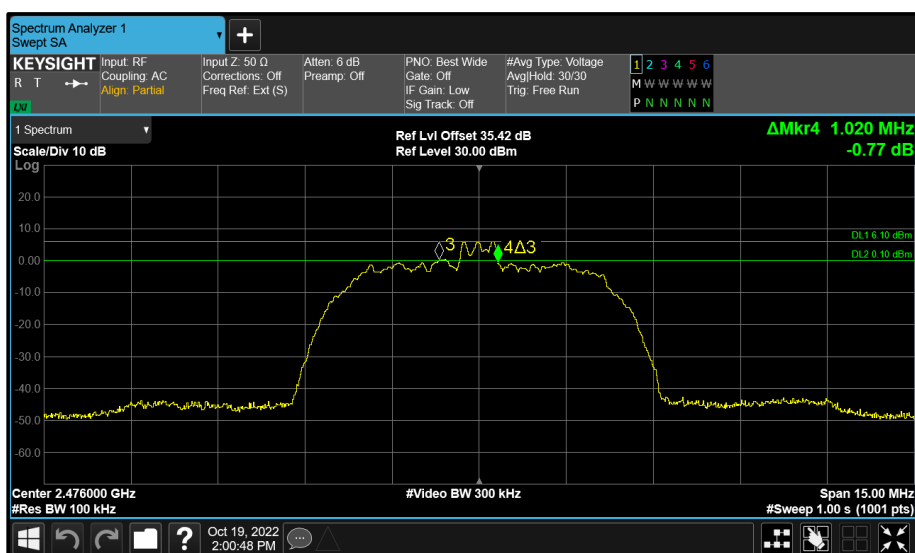


Figure 80 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	1.896	-	≥ 500.0
2441	-	-	1.896	-	≥ 500.0
2476	-	-	1.896	-	≥ 500.0

Table 38 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	2.320	-	-
2441	-	-	2.320	-	-
2476	-	-	2.328	-	-

Table 39 - 99% Bandwidth Results

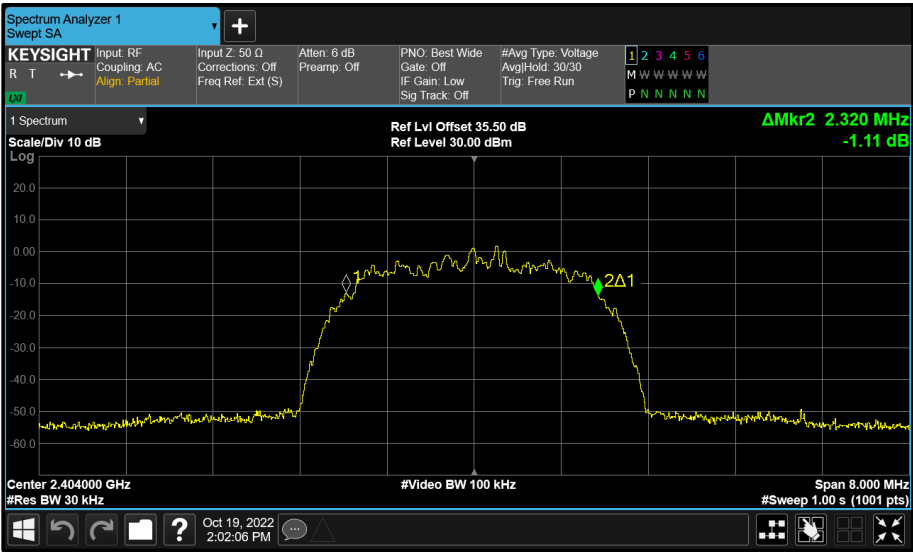


Figure 81 - Core 2 (C) 2404 MHz (CH2) 99% Bandwidth

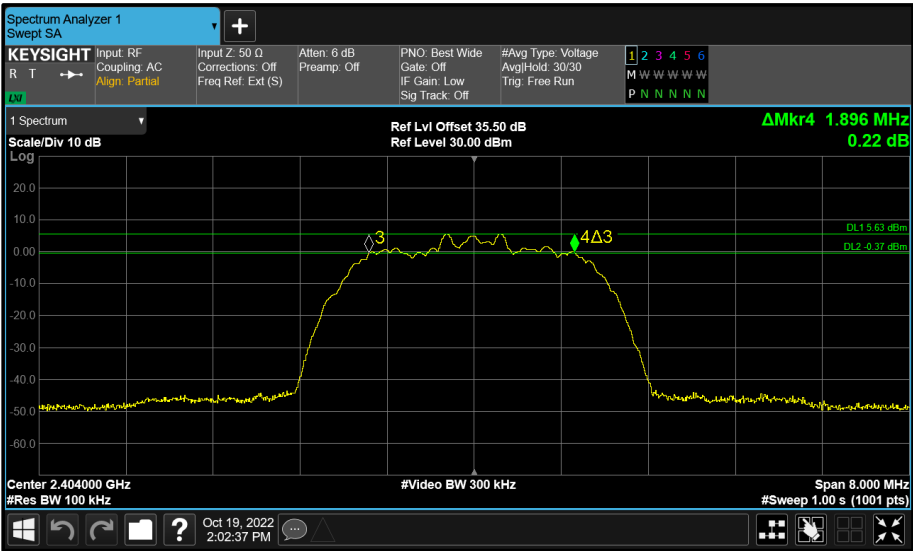


Figure 82 - Core 2 (C) 2404 MHz (CH2) 6 dB Bandwidth

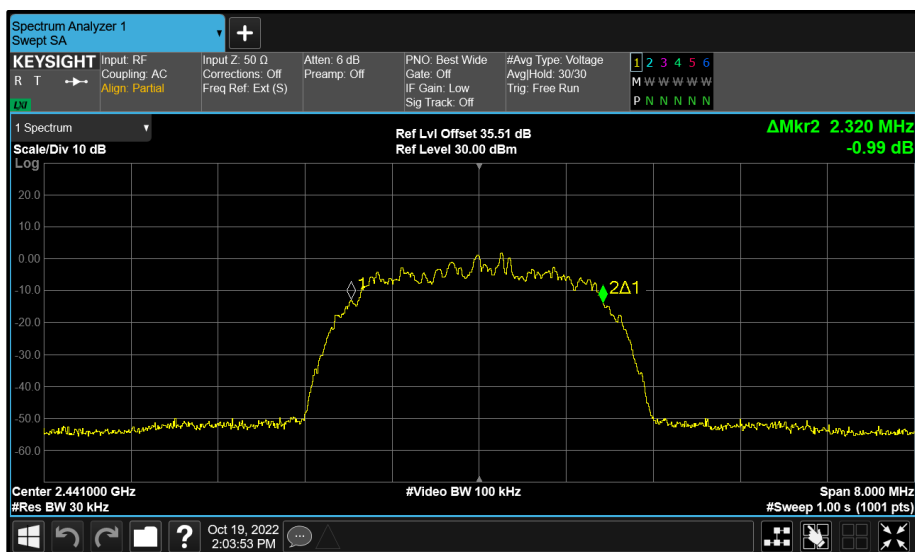


Figure 83 - Core 2 (C) 2441 MHz (CH39) 99% Bandwidth

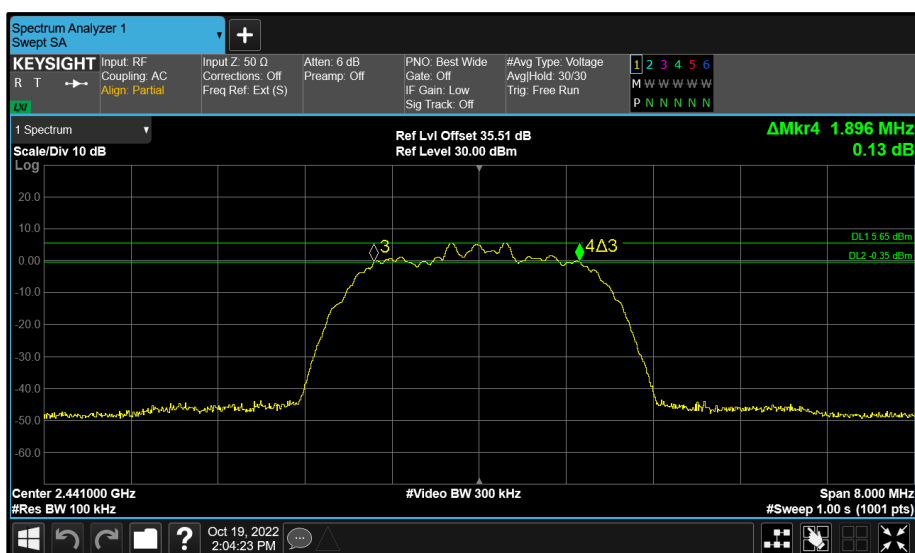


Figure 84 - Core 2 (C) 2441 MHz (CH39) 6 dB Bandwidth

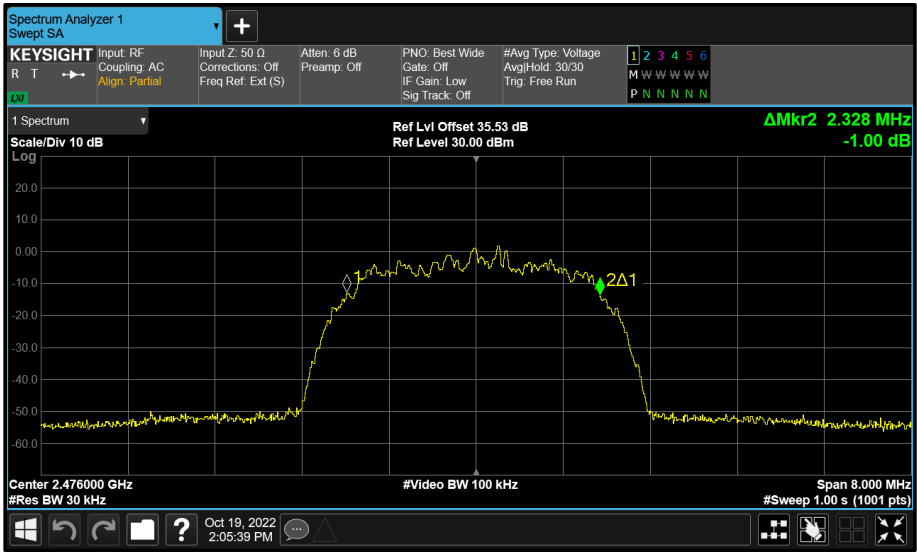


Figure 85 - Core 2 (C) 2476 MHz (CH74) 99% Bandwidth

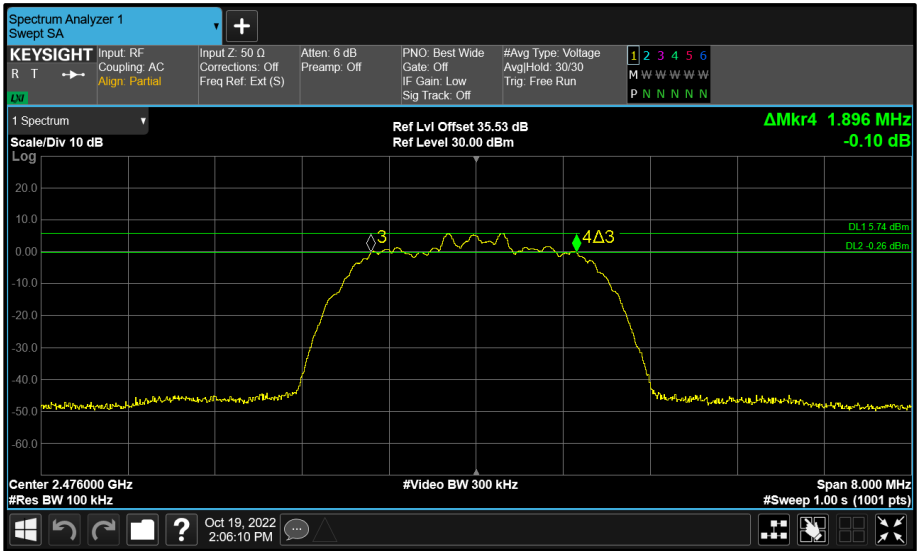


Figure 86 - Core 2 (C) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	1.020	-	≥ 500.0
2441	-	-	1.020	-	≥ 500.0
2476	-	-	1.020	-	≥ 500.0

Table 40 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	-	-	4.650	-	-
2441	-	-	4.650	-	-
2476	-	-	4.635	-	-

Table 41 - 99% Bandwidth Results

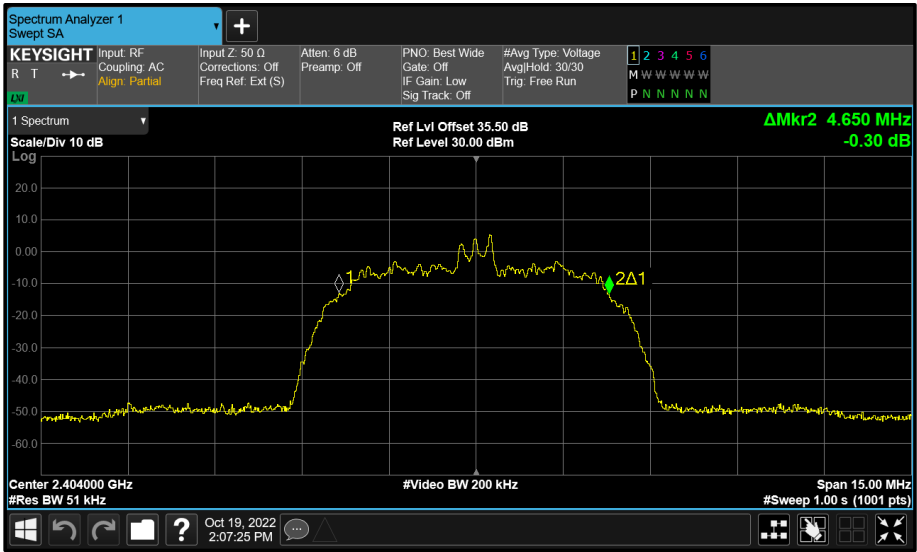


Figure 87 - Core 2 (C) 2404 MHz (CH2) 99% Bandwidth

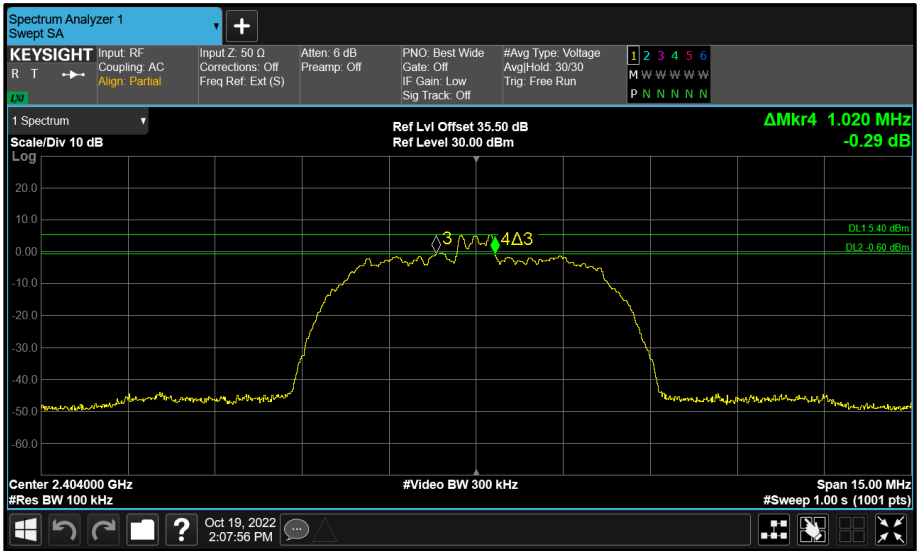


Figure 88 - Core 2 (C) 2404 MHz (CH2) 6 dB Bandwidth

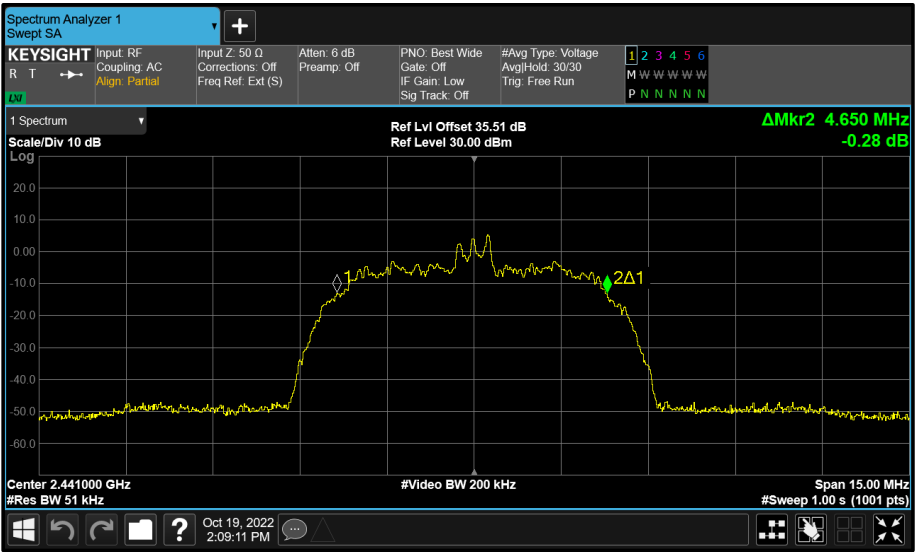


Figure 89 - Core 2 (C) 2441 MHz (CH39) 99% Bandwidth

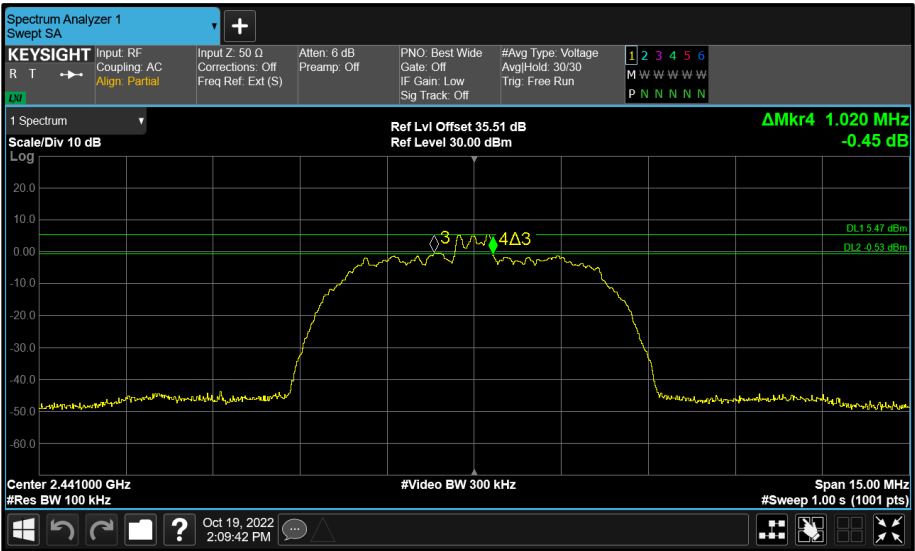


Figure 90 - Core 2 (C) 2441 MHz (CH39) 6 dB Bandwidth

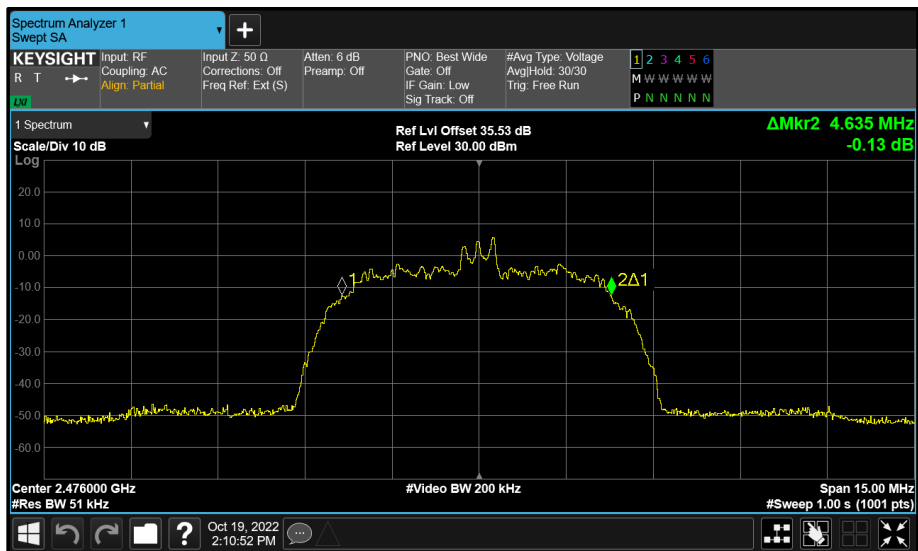


Figure 91 - Core 2 (C) 2476 MHz (CH74) 99% Bandwidth

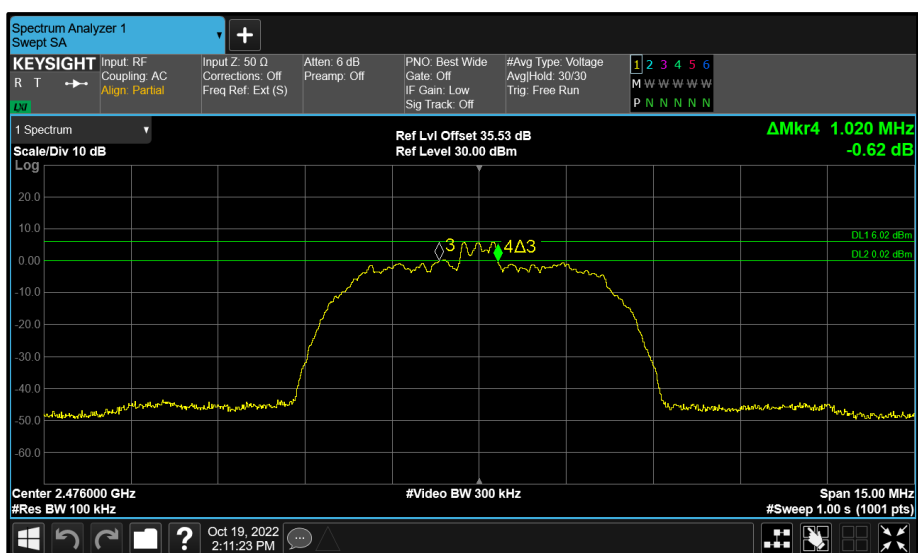


Figure 92 - Core 2 (C) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (4-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	1.840	1.888	-	-	≥ 500.0
2441	1.896	1.888	-	-	≥ 500.0
2476	1.880	1.896	-	-	≥ 500.0

Table 42 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	2.320	2.320	-	-	-
2441	2.320	2.320	-	-	-
2476	2.328	2.328	-	-	-

Table 43 - 99% Bandwidth Results

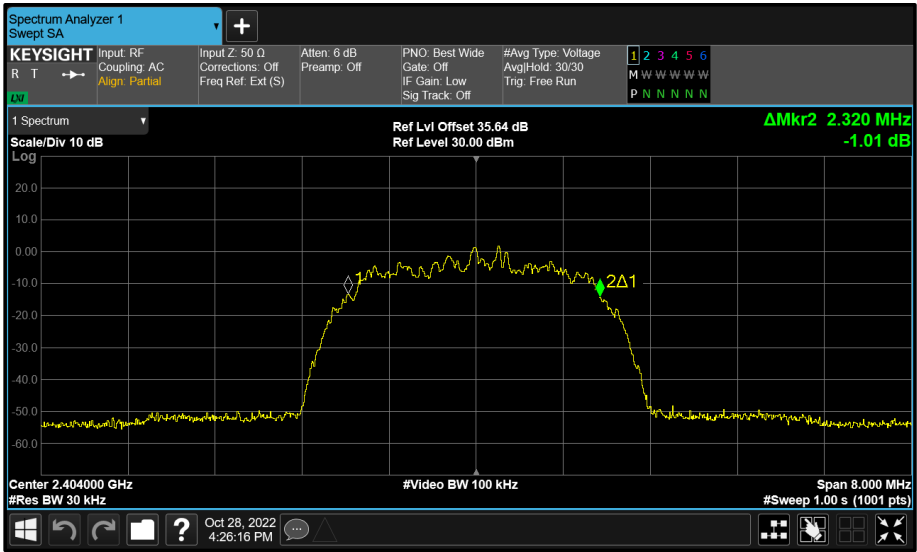


Figure 93 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

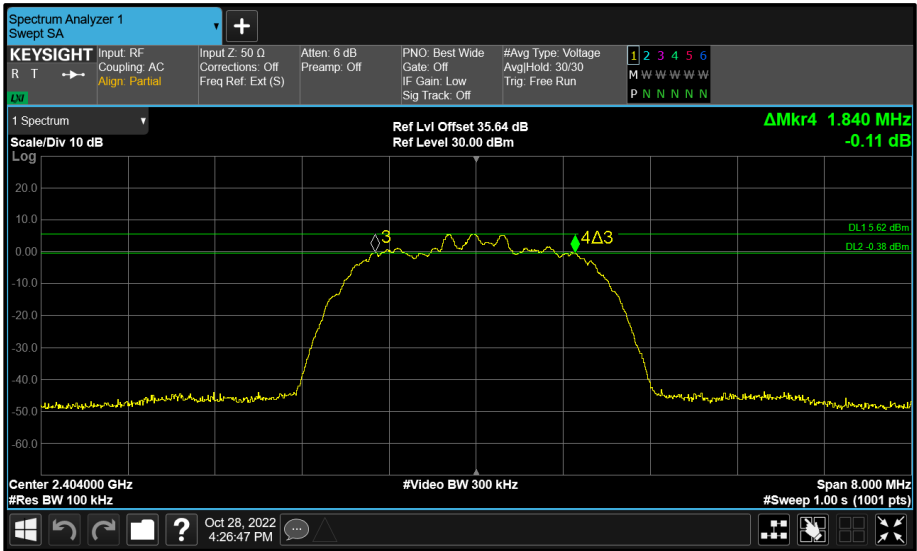


Figure 94 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

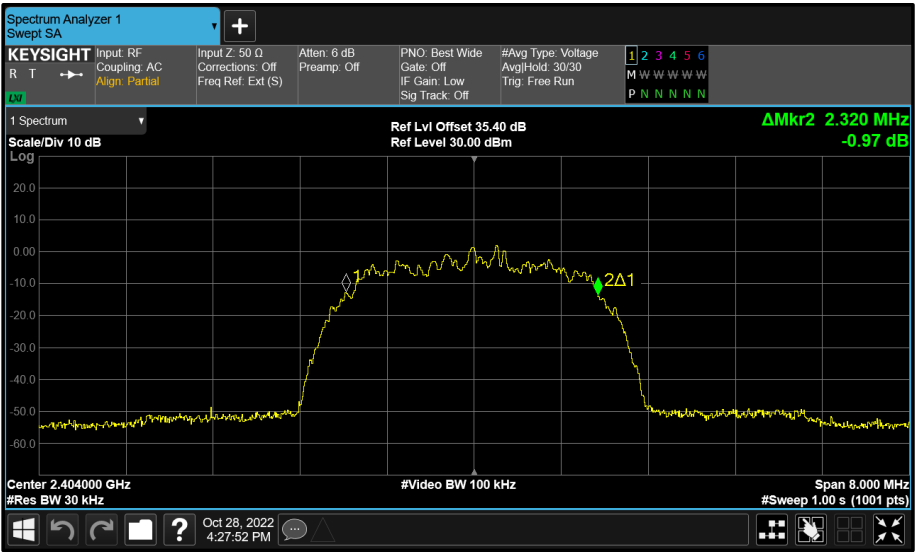


Figure 95 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

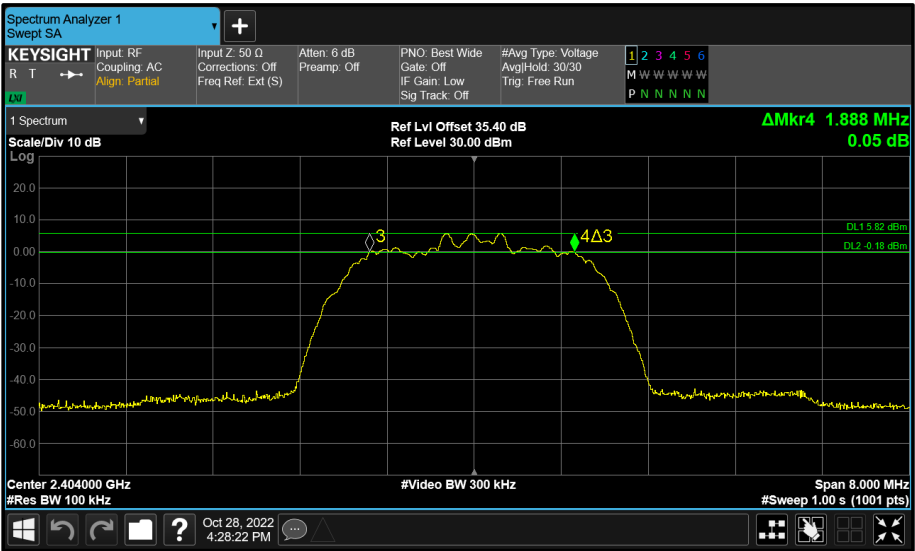


Figure 96 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

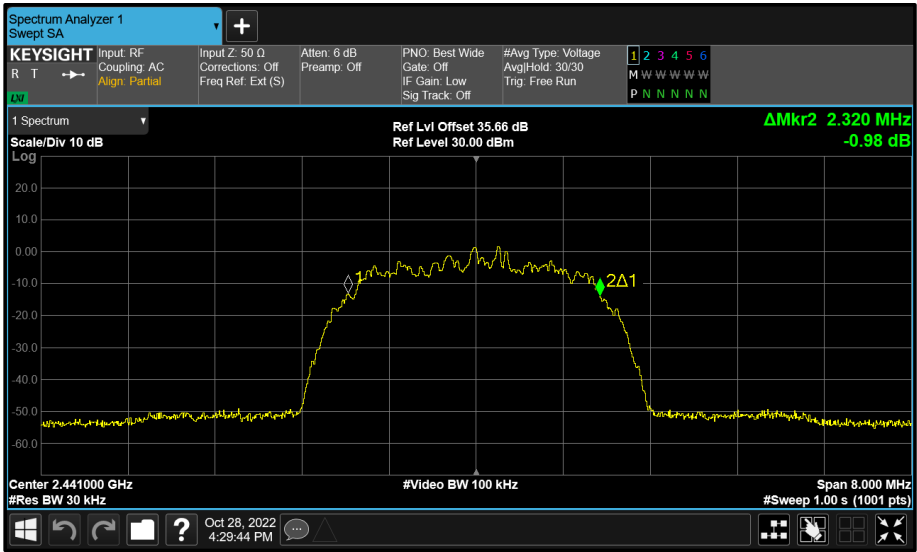


Figure 97 - Core 0 (A) 2441 MHz (CH39) 99% Bandwidth

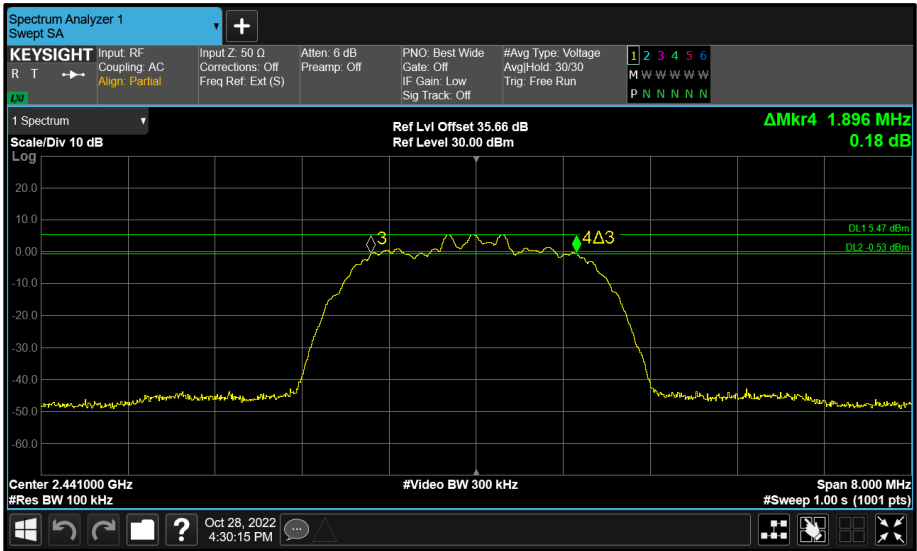


Figure 98 - Core 0 (A) 2441 MHz (CH39) 6 dB Bandwidth

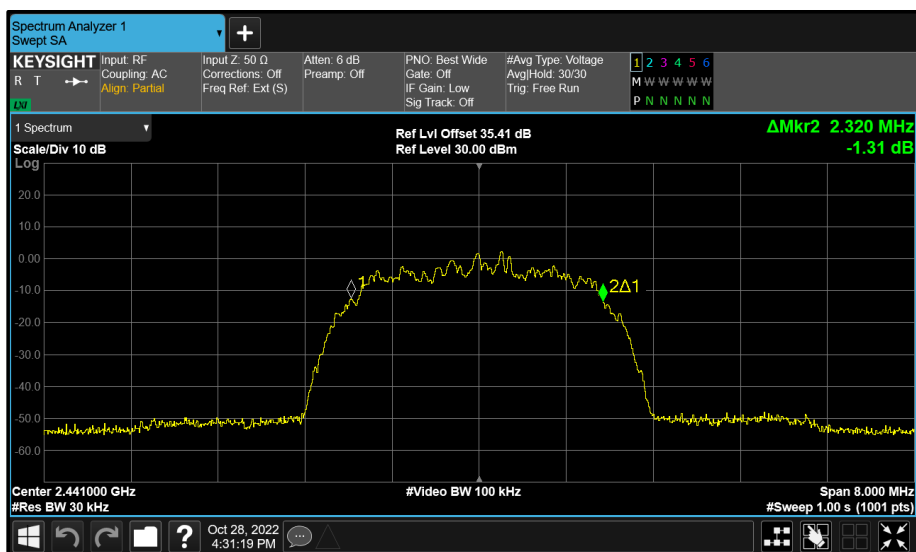


Figure 99 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

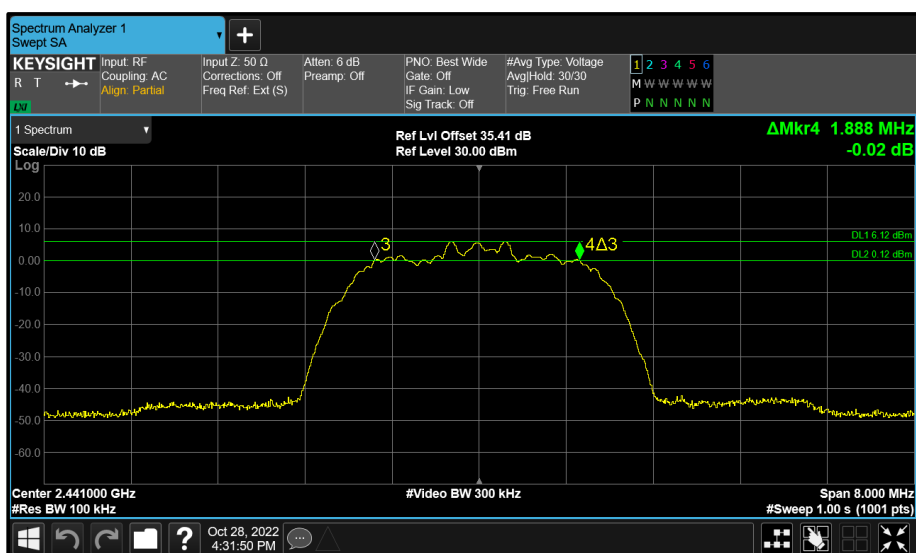


Figure 100 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

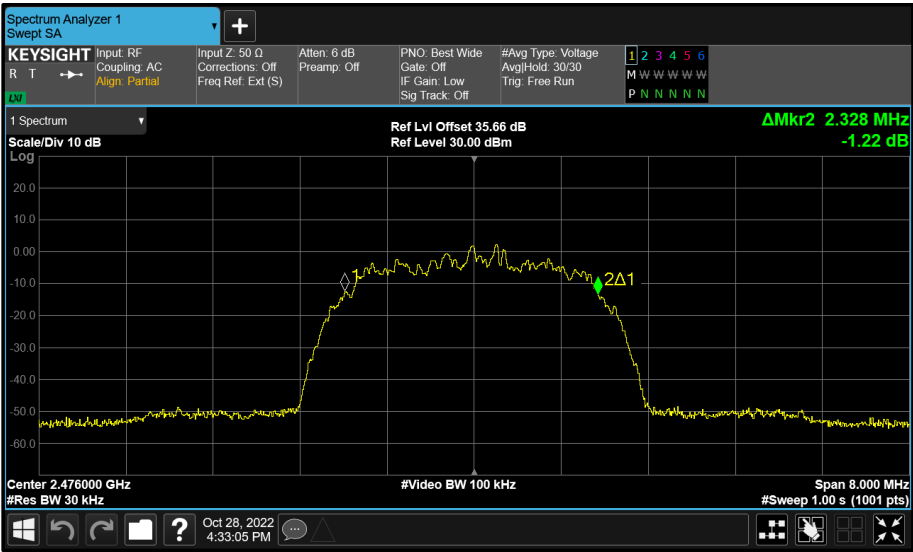


Figure 101 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

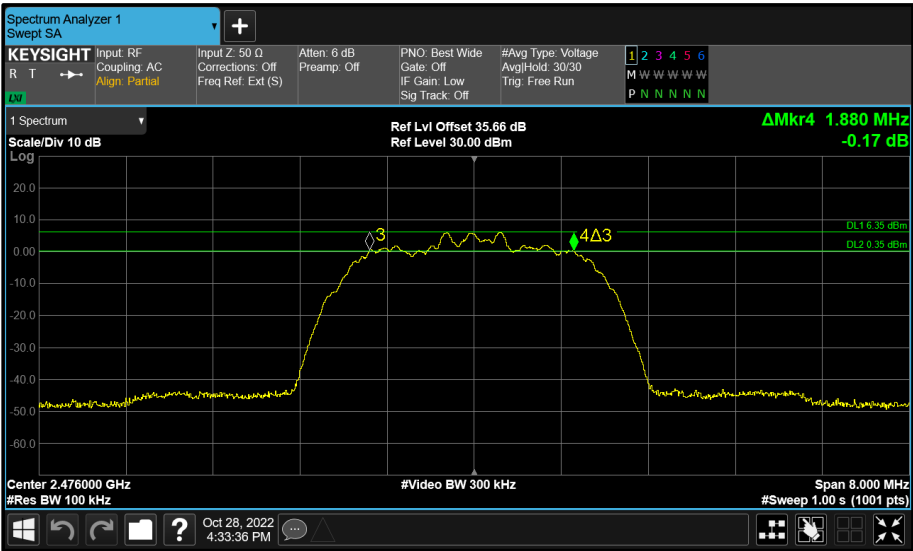


Figure 102 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth

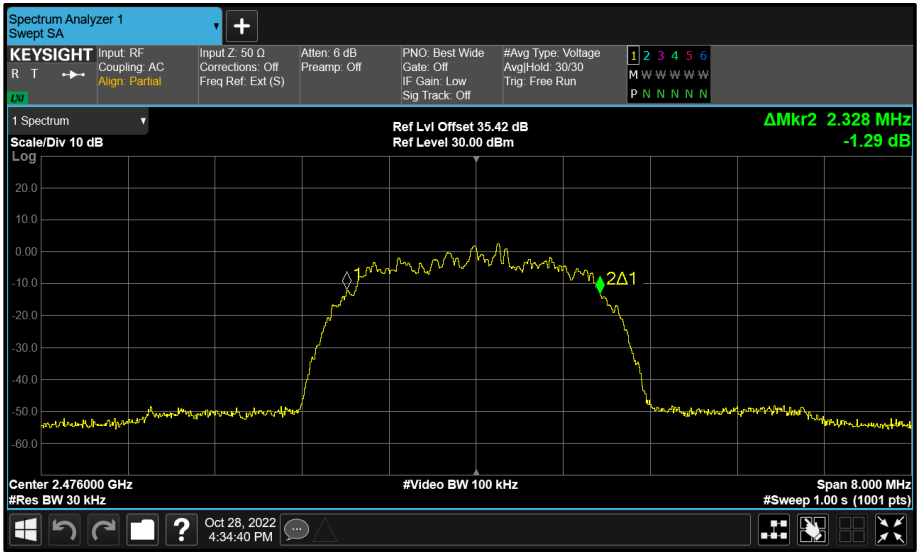


Figure 103 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

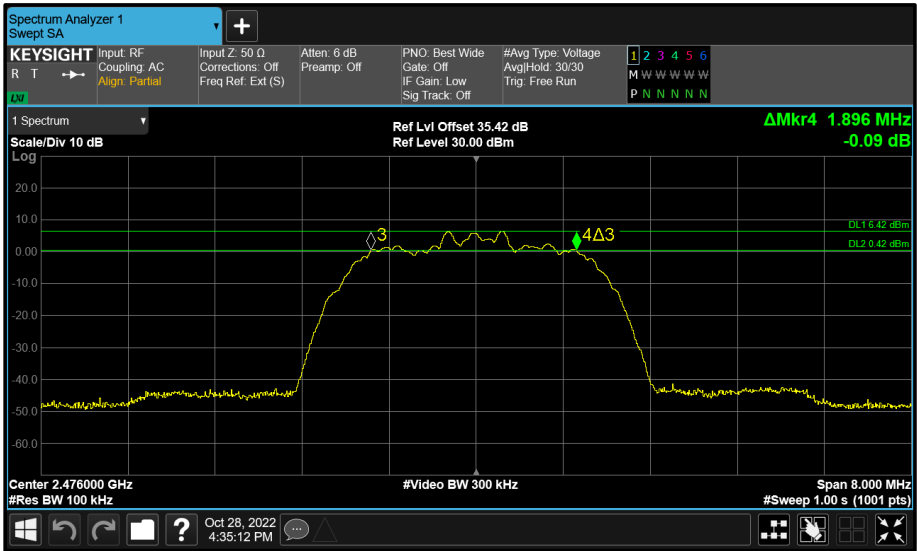


Figure 104 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA $\pi/4$ DQPSK (8-DH5)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	0.660	0.960	-	-	≥ 500.0
2441	0.930	1.020	-	-	≥ 500.0
2476	0.675	1.035	-	-	≥ 500.0

Table 44 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2404	4.635	4.635	-	-	-
2441	4.650	4.635	-	-	-
2476	4.620	4.635	-	-	-

Table 45 - 99% Bandwidth Results

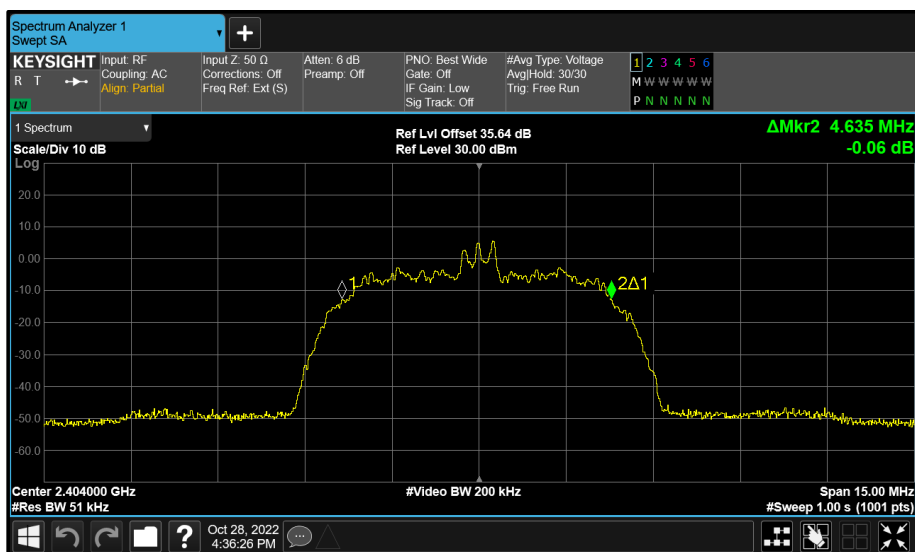


Figure 105 - Core 0 (A) 2404 MHz (CH2) 99% Bandwidth

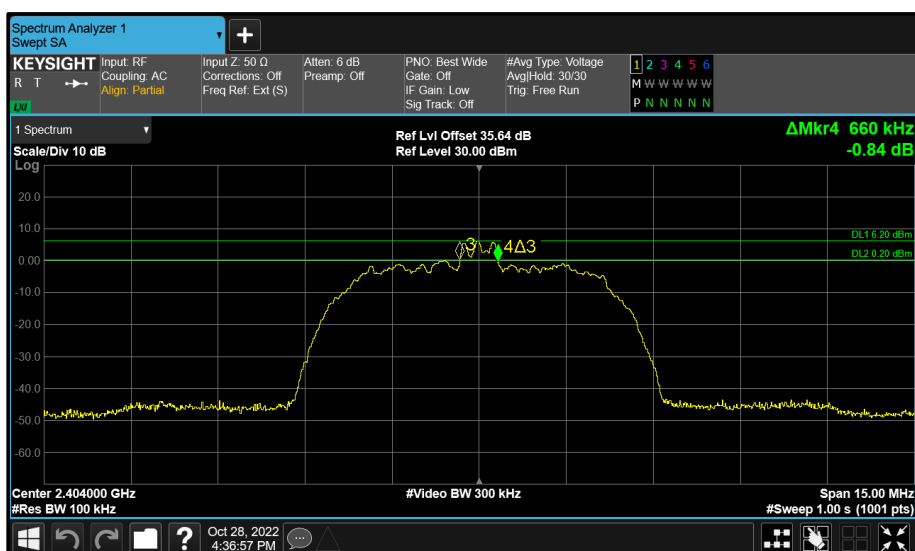


Figure 106 - Core 0 (A) 2404 MHz (CH2) 6 dB Bandwidth

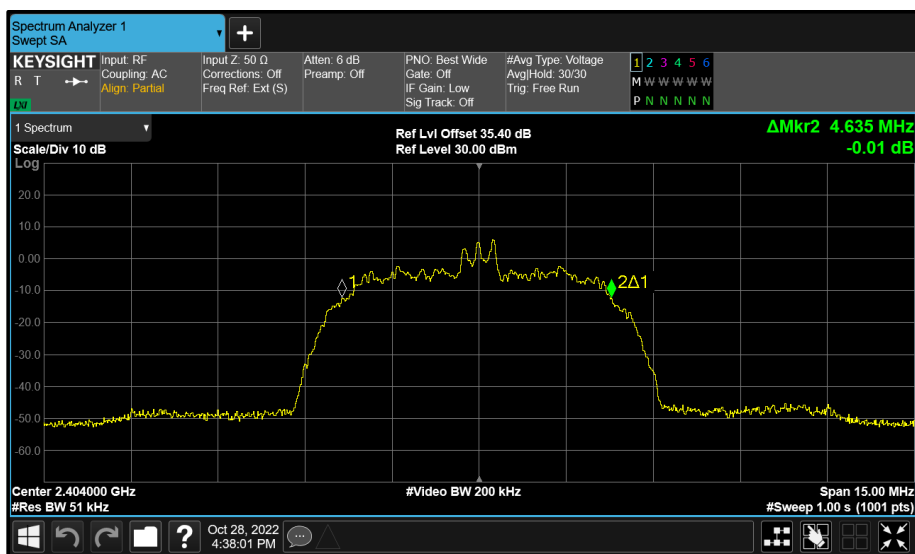


Figure 107 - Core 1 (B) 2404 MHz (CH2) 99% Bandwidth

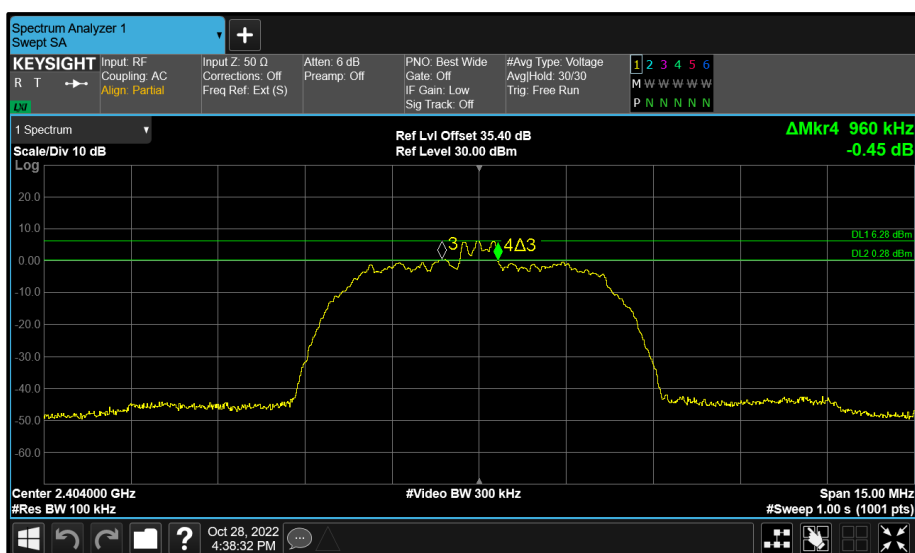


Figure 108 - Core 1 (B) 2404 MHz (CH2) 6 dB Bandwidth

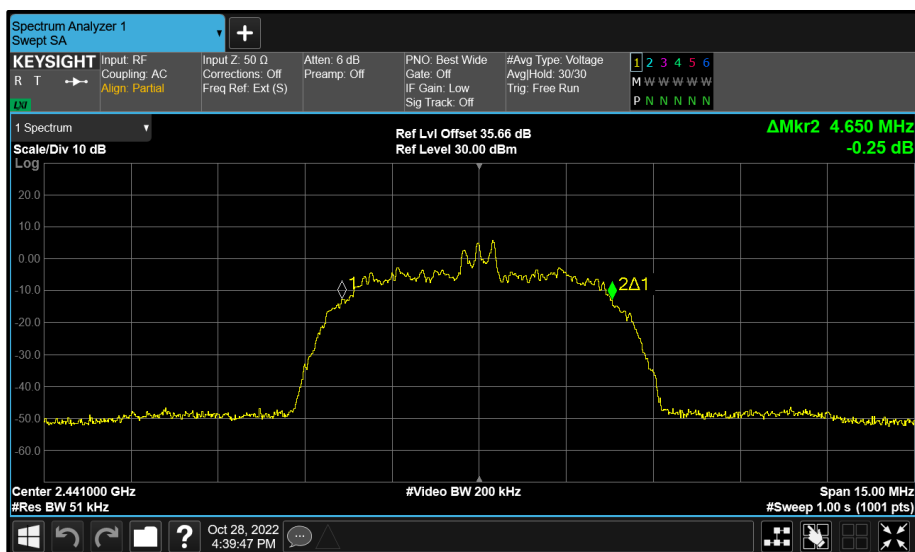


Figure 109 - Core 0 (A) 2441 MHz (CH39) 99% Bandwidth

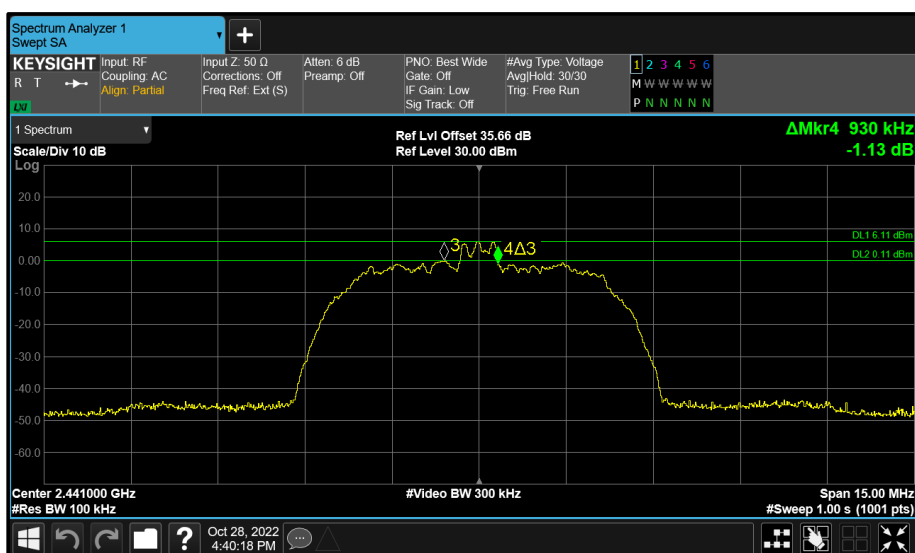


Figure 110 - Core 0 (A) 2441 MHz (CH39) 6 dB Bandwidth

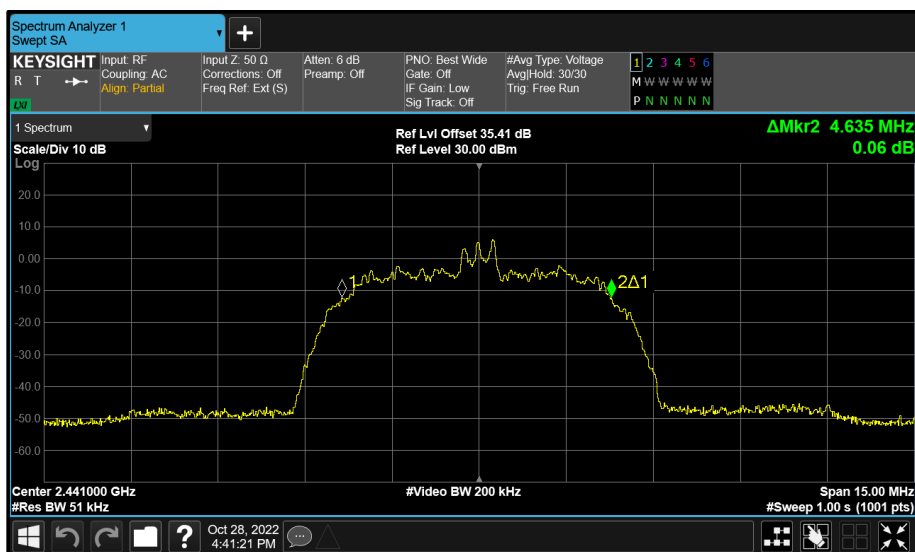


Figure 111 - Core 1 (B) 2441 MHz (CH39) 99% Bandwidth

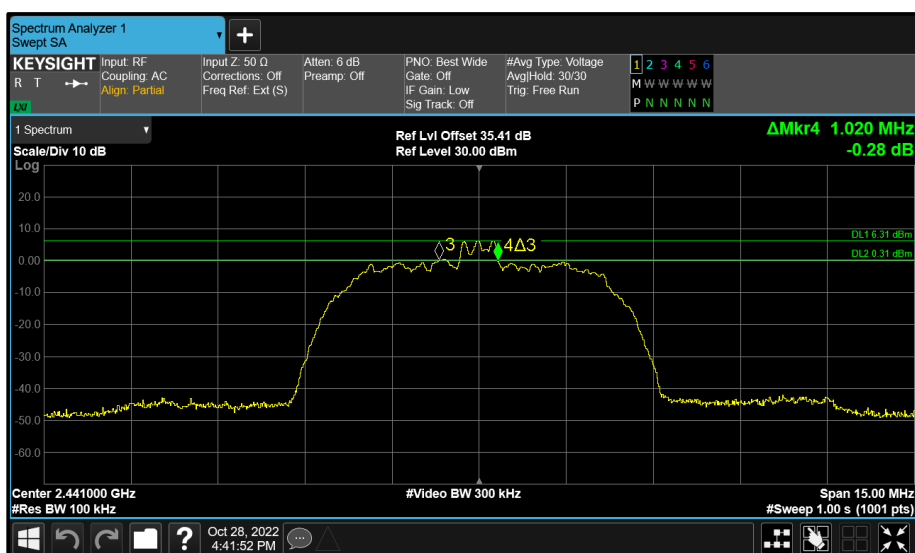


Figure 112 - Core 1 (B) 2441 MHz (CH39) 6 dB Bandwidth

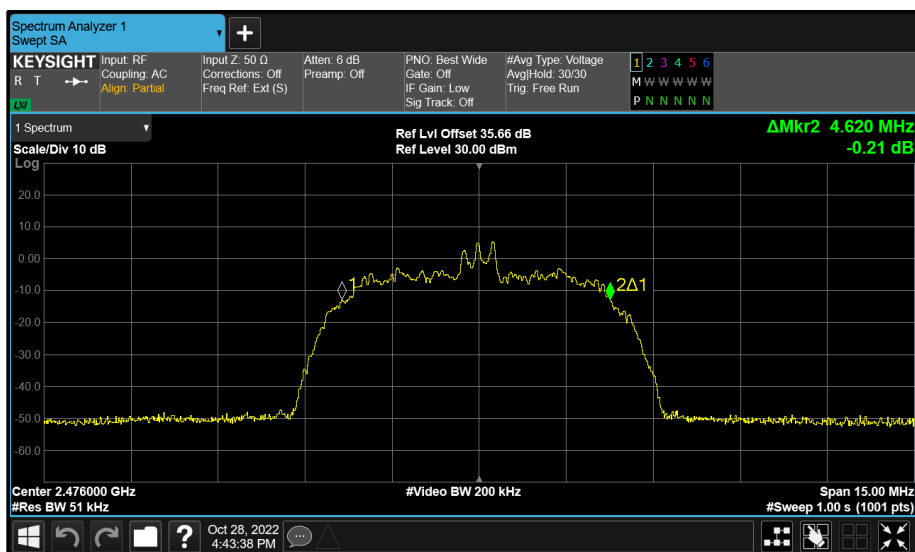


Figure 113 - Core 0 (A) 2476 MHz (CH74) 99% Bandwidth

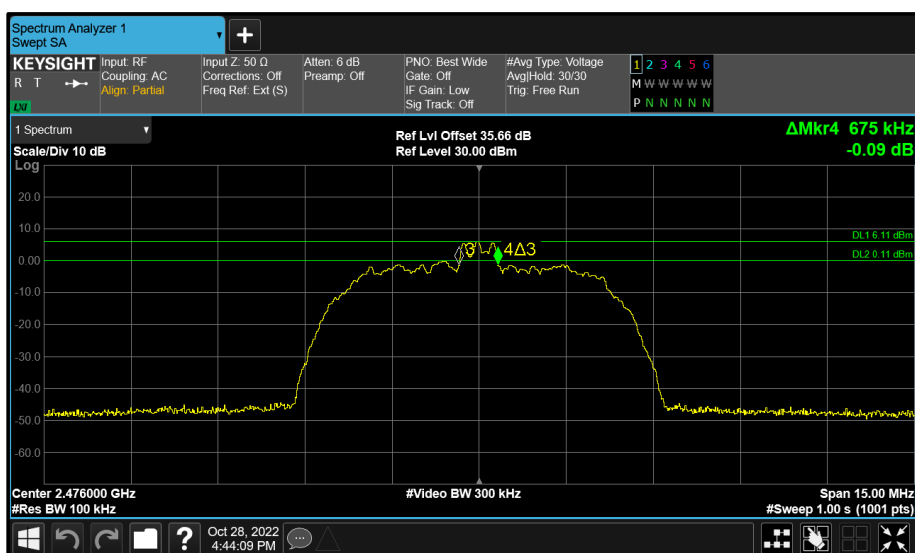


Figure 114 - Core 0 (A) 2476 MHz (CH74) 6 dB Bandwidth

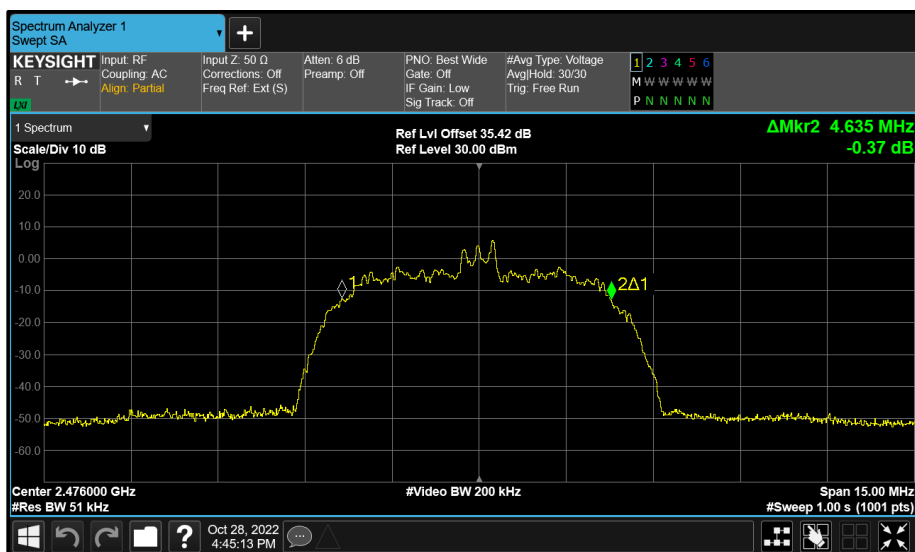


Figure 115 - Core 1 (B) 2476 MHz (CH74) 99% Bandwidth

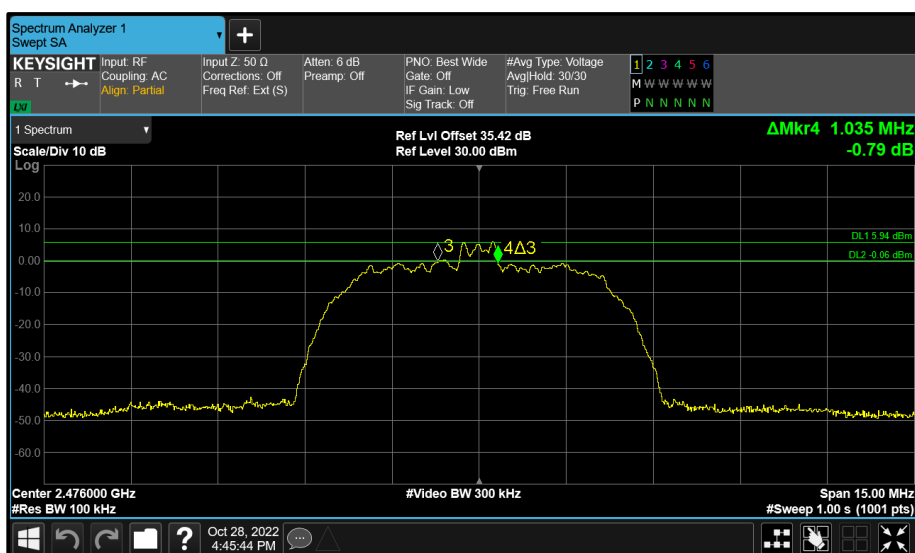


Figure 116 - Core 1 (B) 2476 MHz (CH74) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE1M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	0.660	-	-	≥500.0
2440	-	0.656	-	-	≥500.0
2480	-	0.664	-	-	≥500.0

Table 46 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	1.040	-	-	-
2440	-	1.040	-	-	-
2480	-	1.040	-	-	-

Table 47 - 99% Bandwidth Results

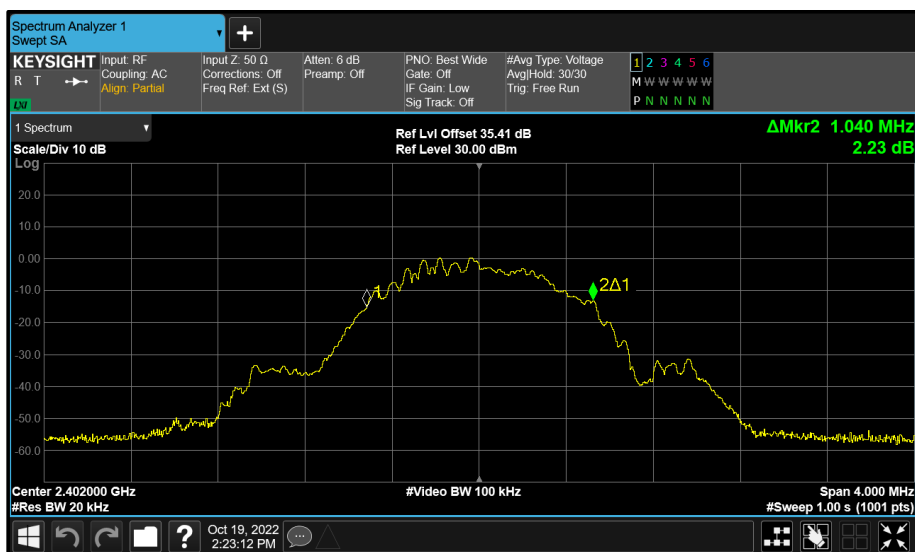


Figure 117 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

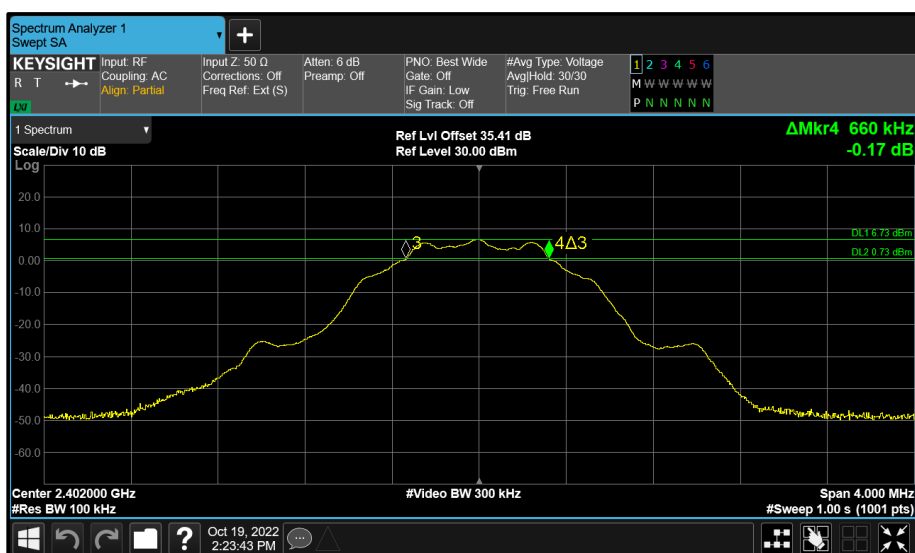


Figure 118 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

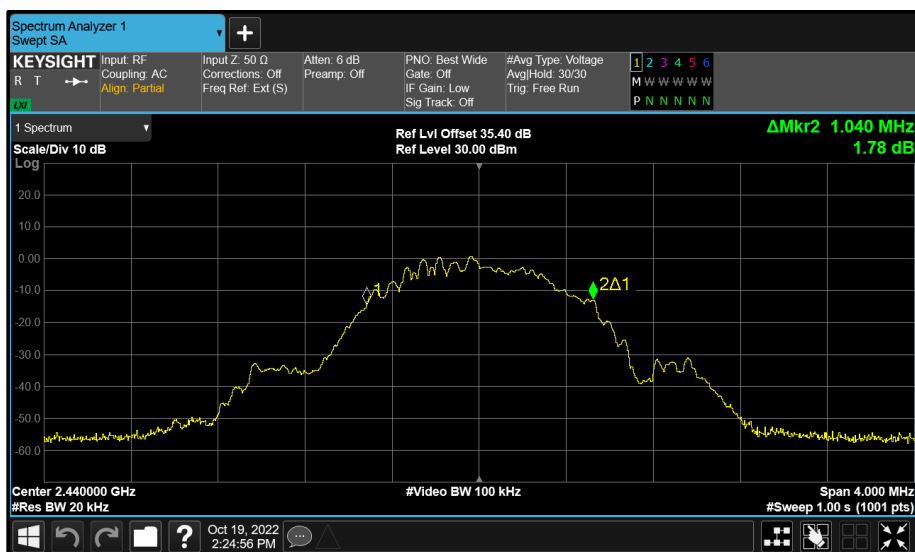


Figure 119 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

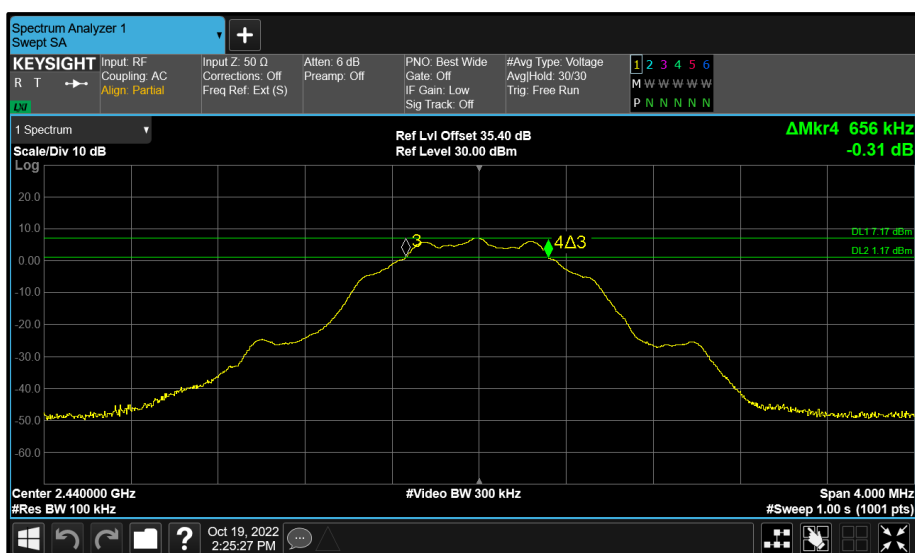


Figure 120 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

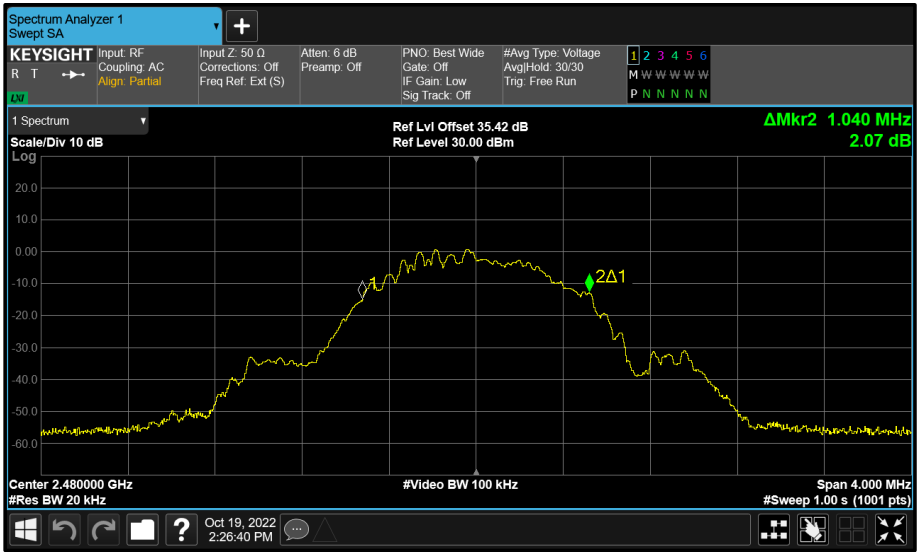


Figure 121 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

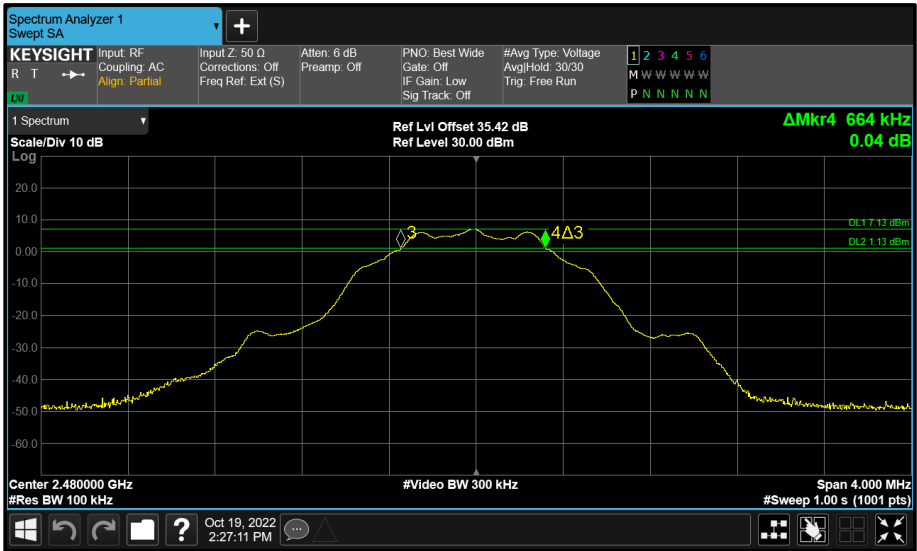


Figure 122 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE2M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	B (Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	1.136	-	-	≥500.0
2440	-	1.120	-	-	≥500.0
2480	-	1.128	-	-	≥500.0

Table 48 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	2.048	-	-	-
2440	-	2.056	-	-	-
2480	-	2.048	-	-	-

Table 49 - 99% Bandwidth Results

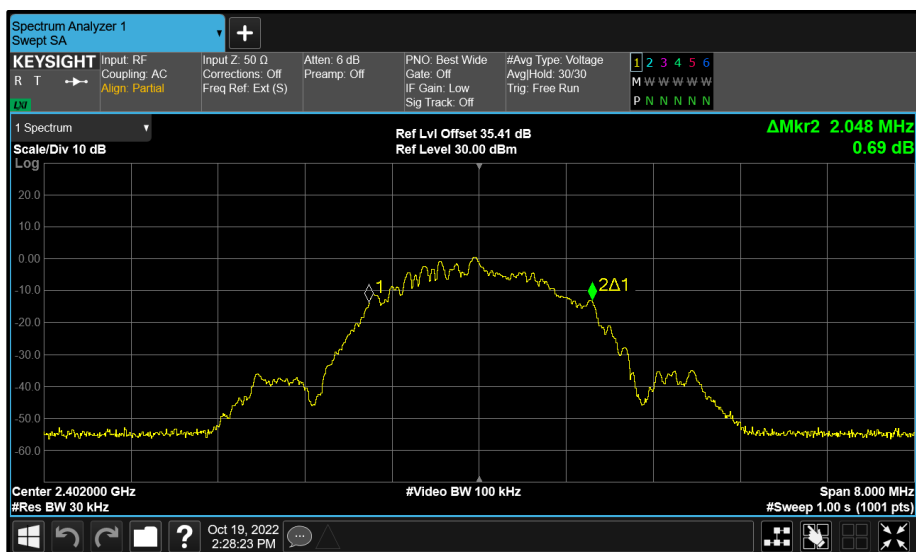


Figure 123 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

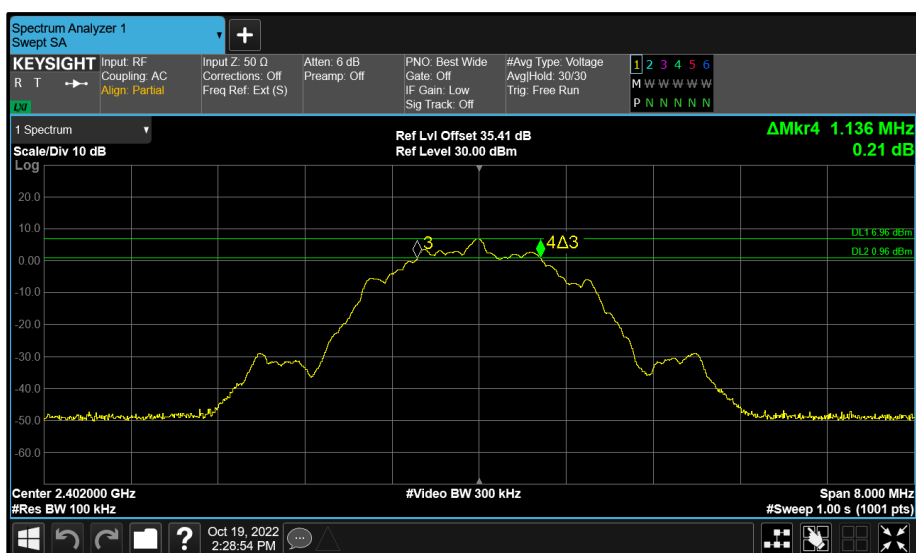


Figure 124 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

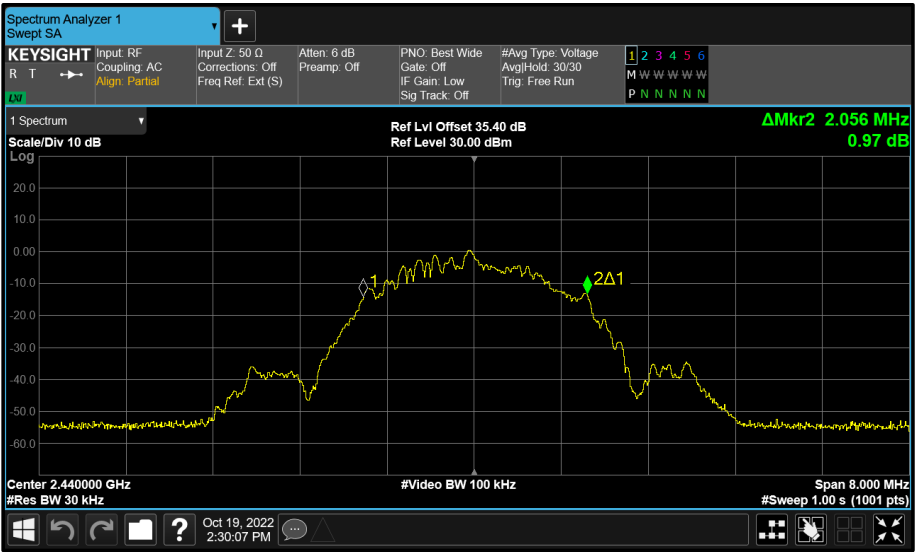


Figure 125 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

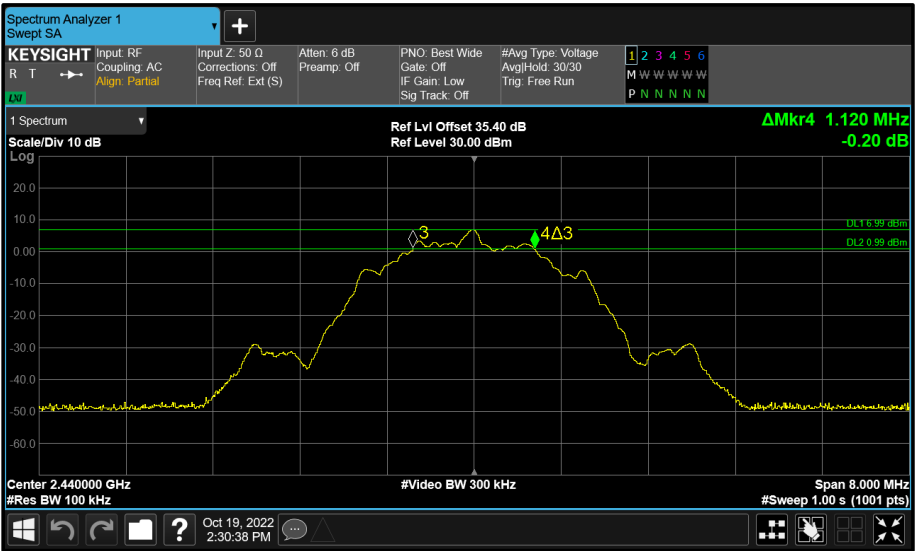


Figure 126 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

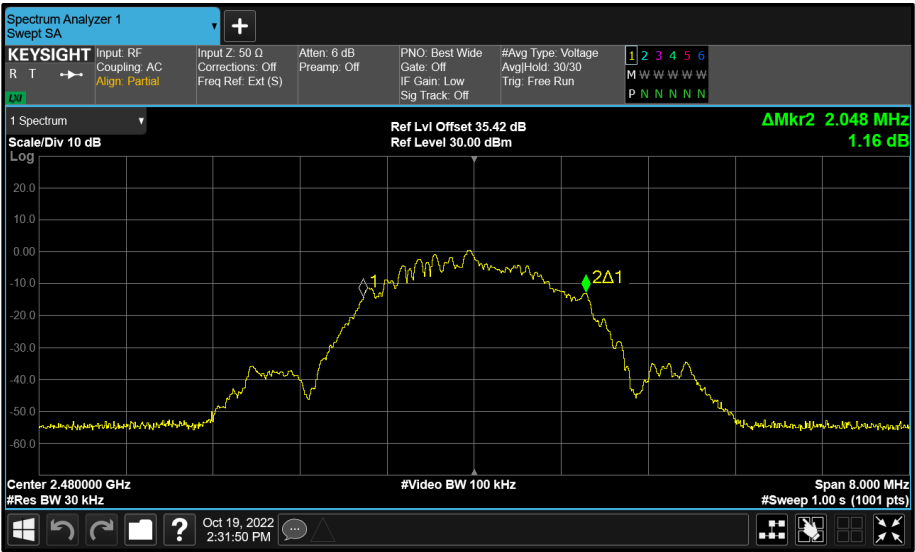


Figure 127 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

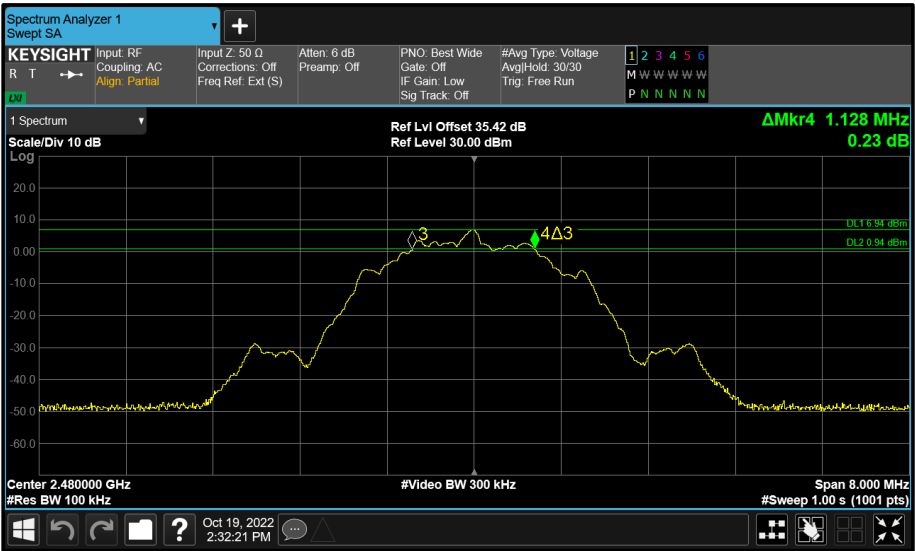


Figure 128 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE1M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	-	0.700	-	≥500.0
2440	-	-	0.680	-	≥500.0
2480	-	-	0.684	-	≥500.0

Table 50 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	-	1.040	-	-
2440	-	-	1.036	-	-
2480	-	-	1.040	-	-

Table 51 - 99% Bandwidth Results

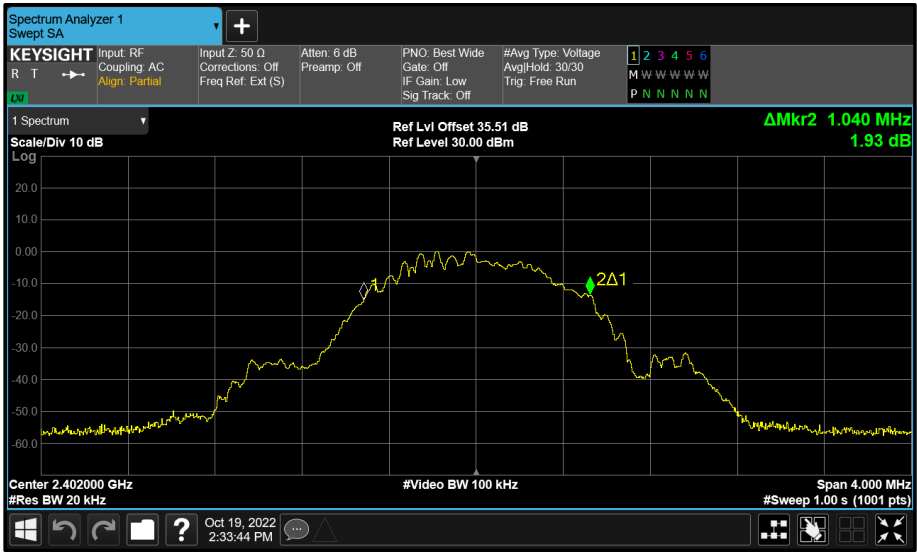


Figure 129 - Core 2 (C) 2402 MHz (CH37) 99% Bandwidth

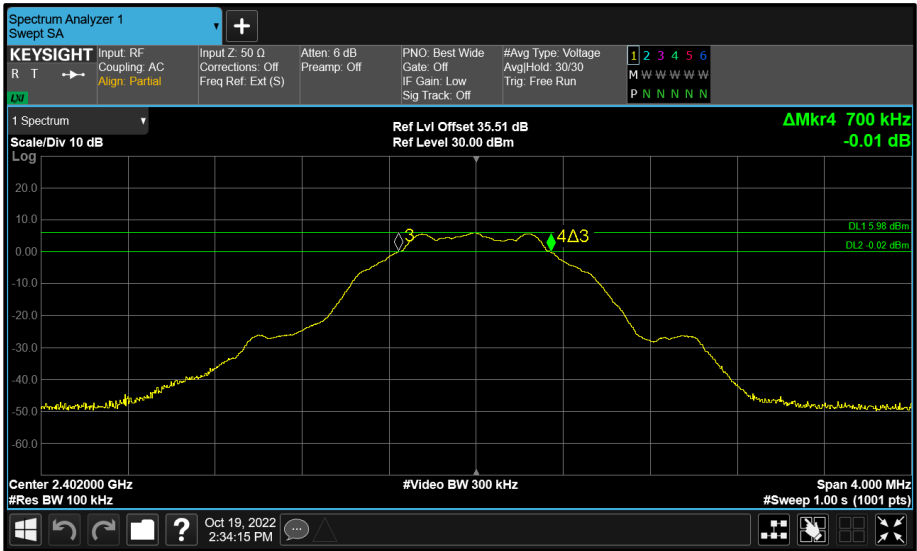


Figure 130 - Core 2 (C) 2402 MHz (CH37) 6 dB Bandwidth

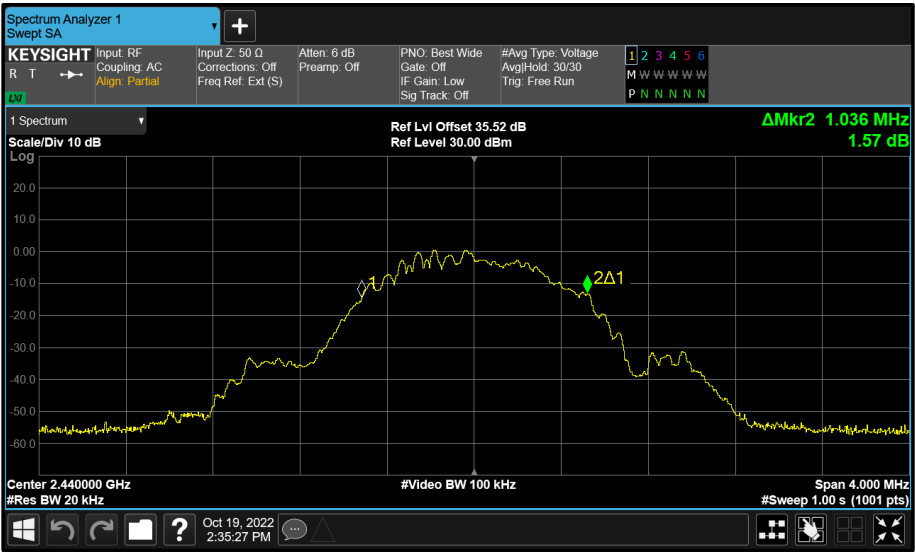


Figure 131 - Core 2 (C) 2440 MHz (CH17) 99% Bandwidth

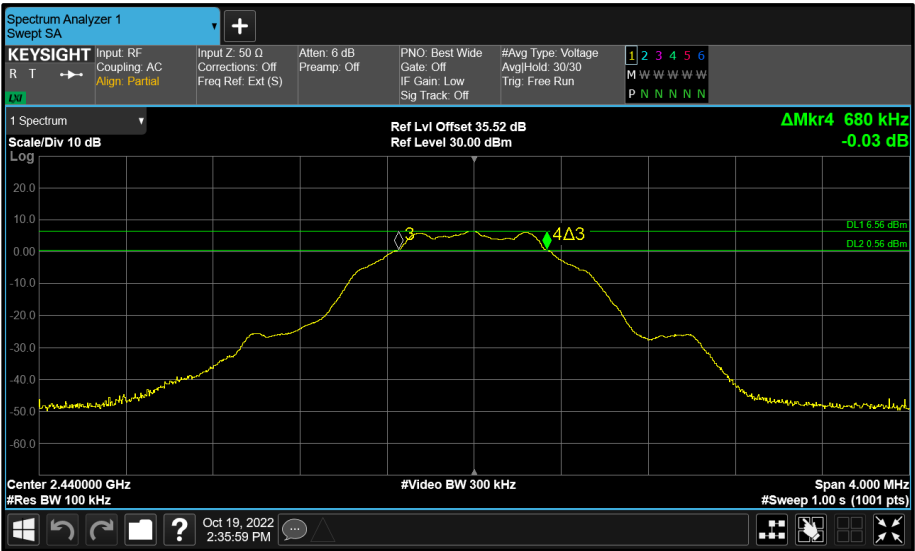


Figure 132 - Core 2 (C) 2440 MHz (CH17) 6 dB Bandwidth

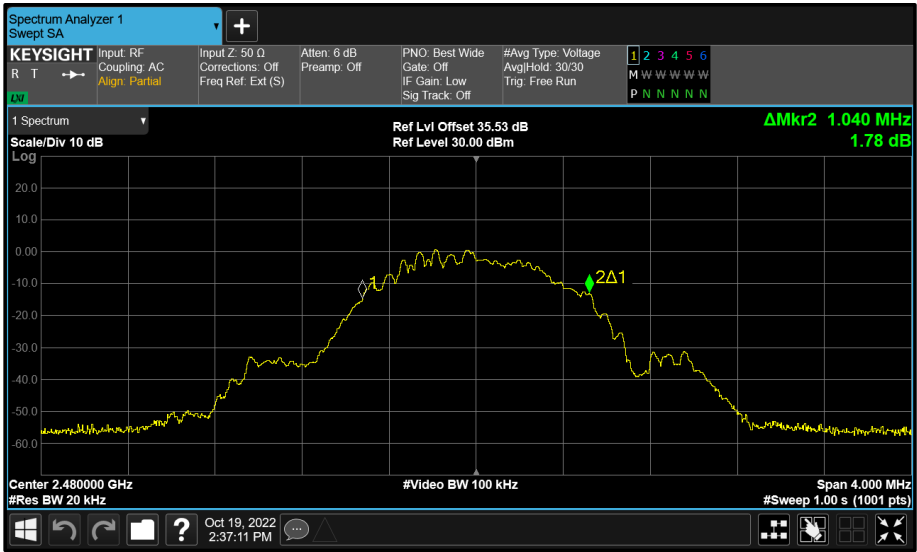


Figure 133 - Core 2 (C) 2480 MHz (CH39) 99% Bandwidth

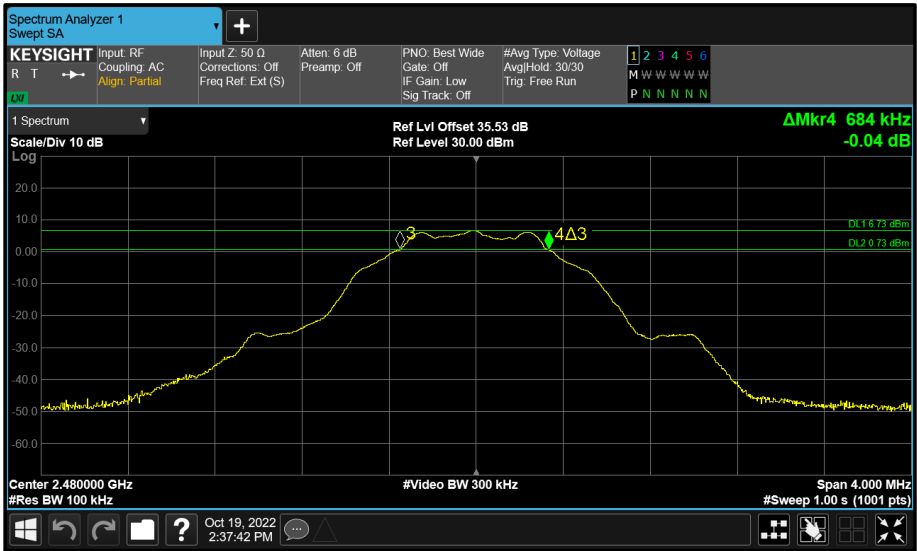


Figure 134 - Core 2 (C) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE2M)	Duty Cycle (%):	-
Antenna Configuration:	SISO	DCCF (dB):	-
Active Port(s):	C (Core 2)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	-	1.160	-	≥500.0
2440	-	-	1.152	-	≥500.0
2480	-	-	1.144	-	≥500.0

Table 52 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	-	-	2.048	-	-
2440	-	-	2.048	-	-
2480	-	-	2.048	-	-

Table 53 - 99% Bandwidth Results

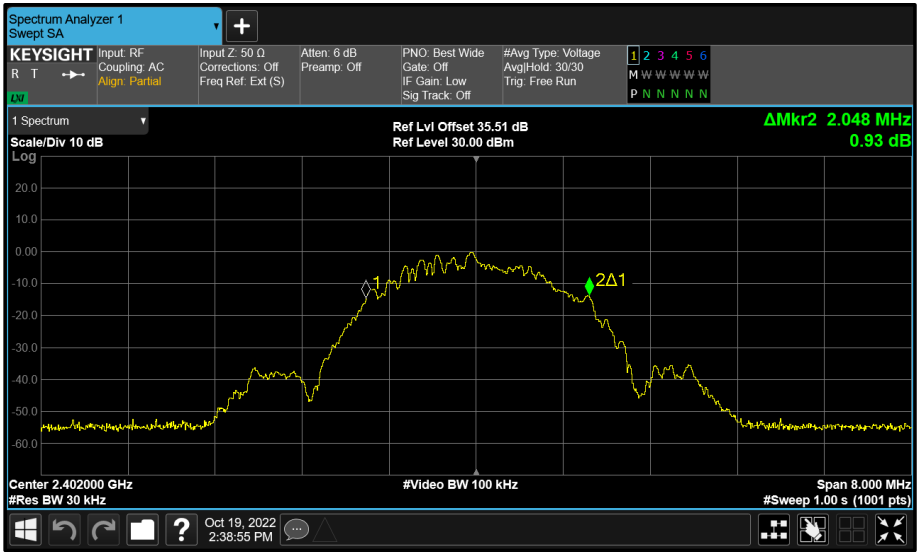


Figure 135 - Core 2 (C) 2402 MHz (CH37) 99% Bandwidth

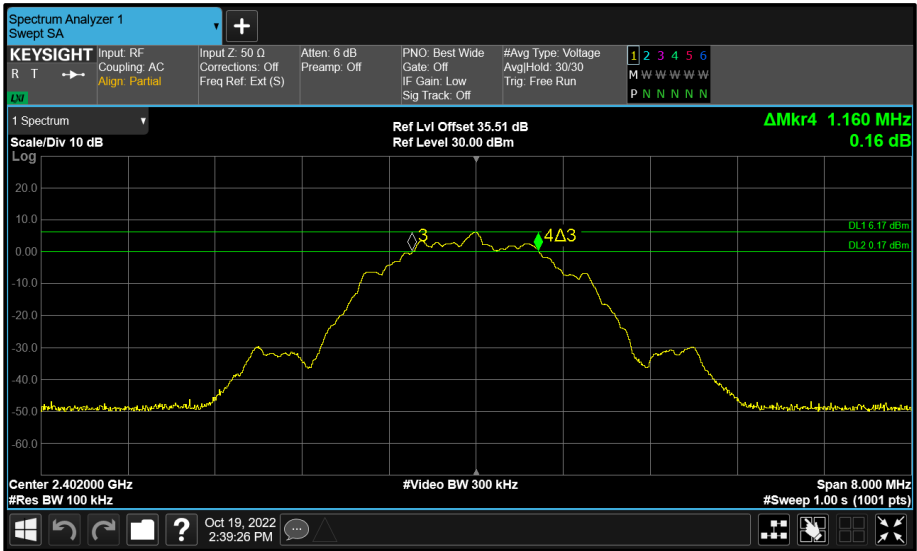


Figure 136 - Core 2 (C) 2402 MHz (CH37) 6 dB Bandwidth

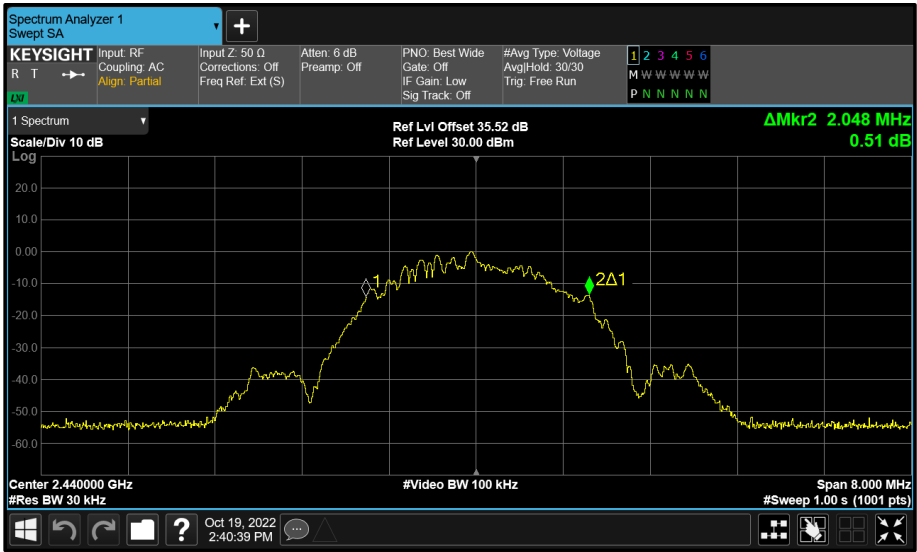


Figure 137 - Core 2 (C) 2440 MHz (CH17) 99% Bandwidth

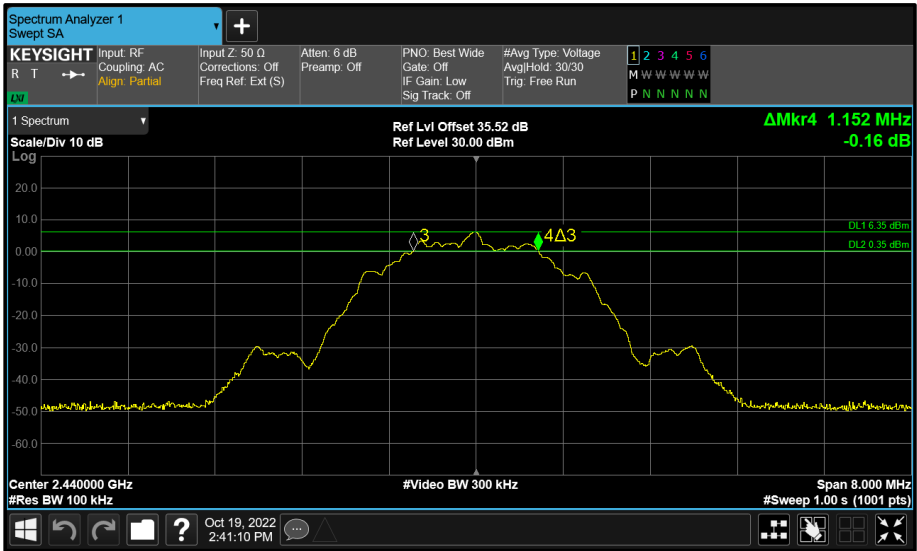


Figure 138 - Core 2 (C) 2440 MHz (CH17) 6 dB Bandwidth

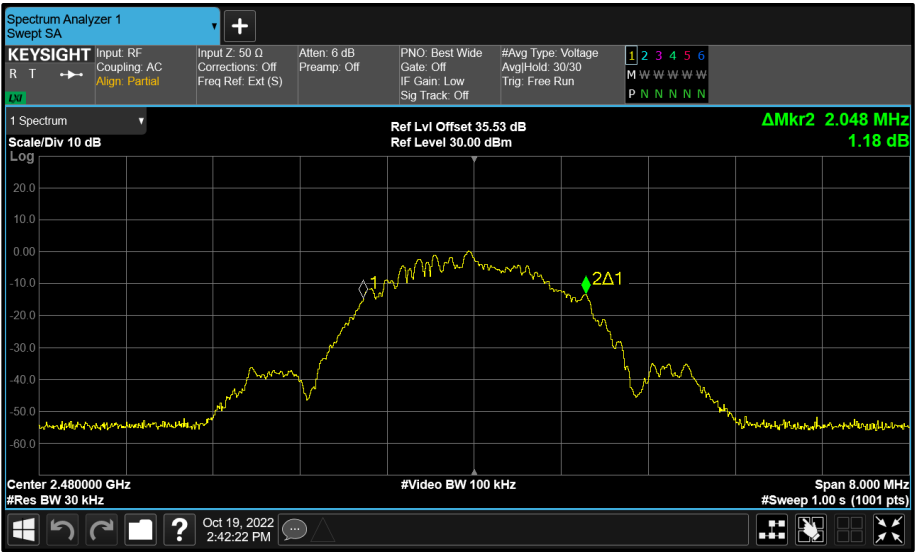


Figure 139 - Core 2 (C) 2480 MHz (CH39) 99% Bandwidth

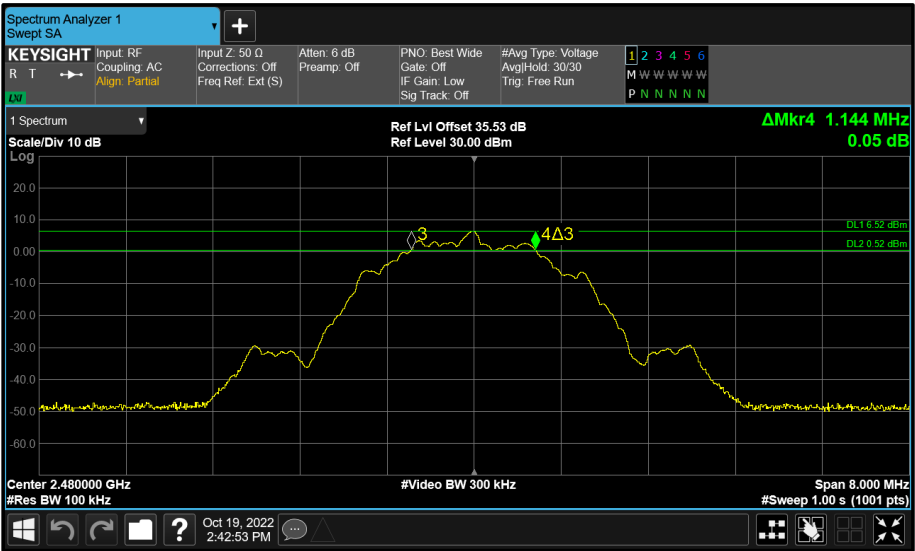


Figure 140 - Core 2 (C) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE1M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	0.700	0.656	-	-	≥500.0
2440	0.708	0.660	-	-	≥500.0
2480	0.728	0.664	-	-	≥500.0

Table 54 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.040	1.040	-	-	-
2440	1.036	1.040	-	-	-
2480	1.040	1.040	-	-	-

Table 55 - 99% Bandwidth Results

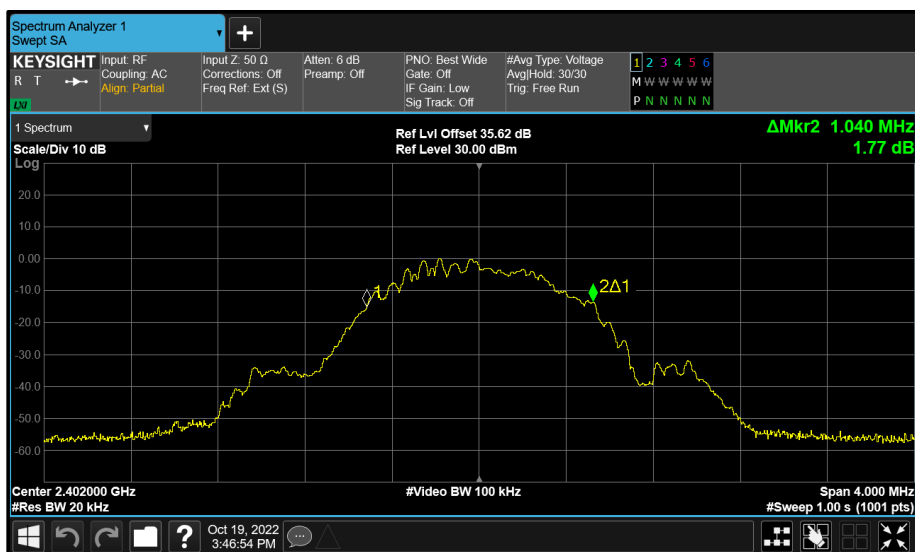


Figure 141 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

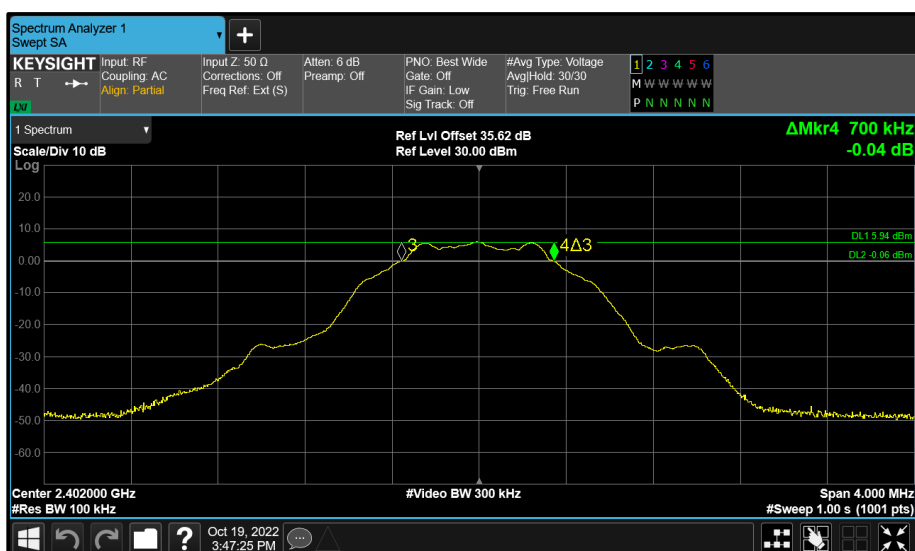


Figure 142 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

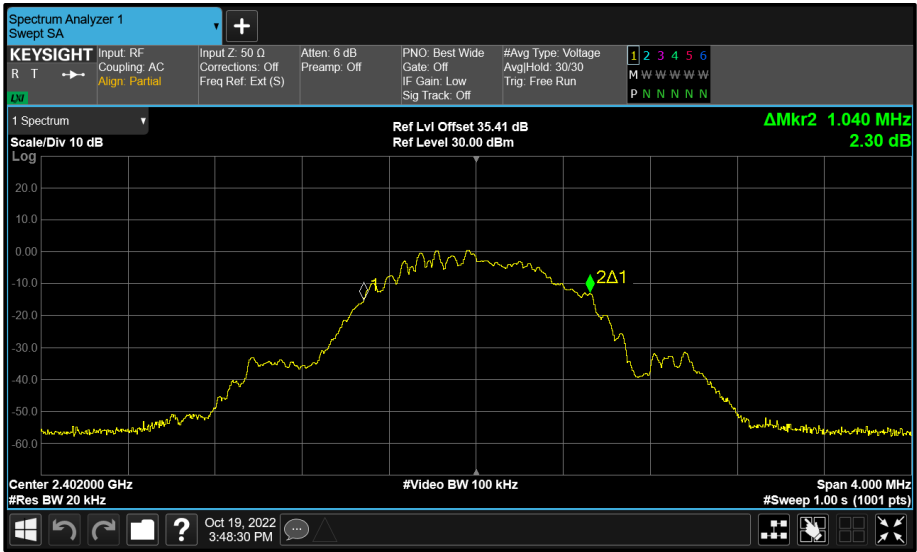


Figure 143 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

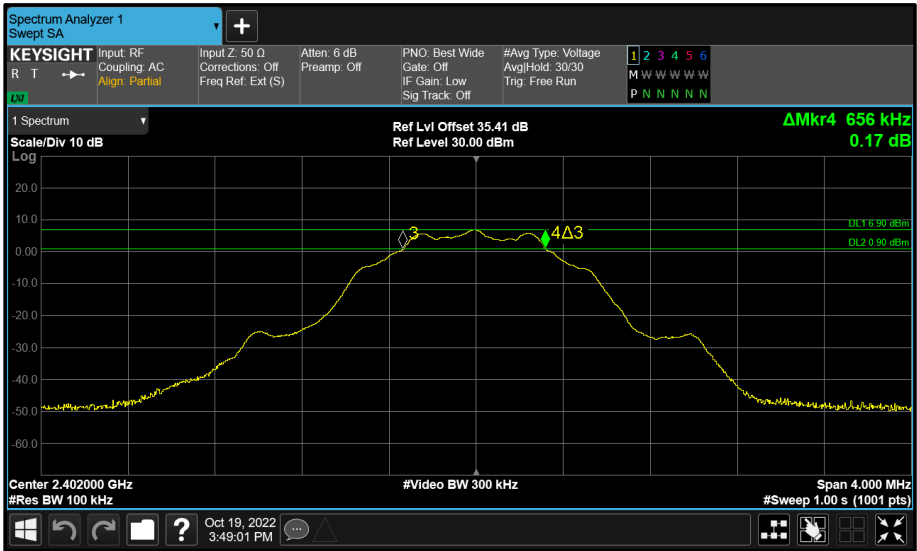


Figure 144 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

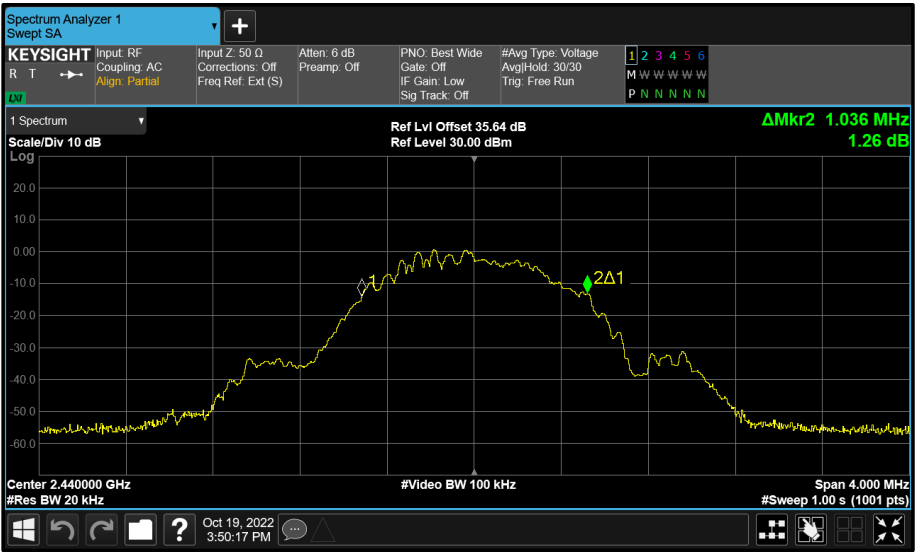


Figure 145 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

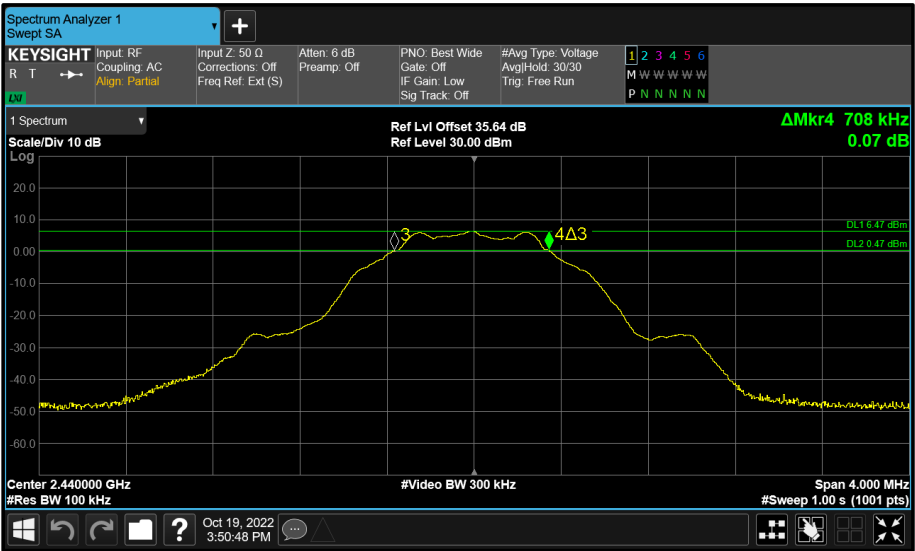


Figure 146 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

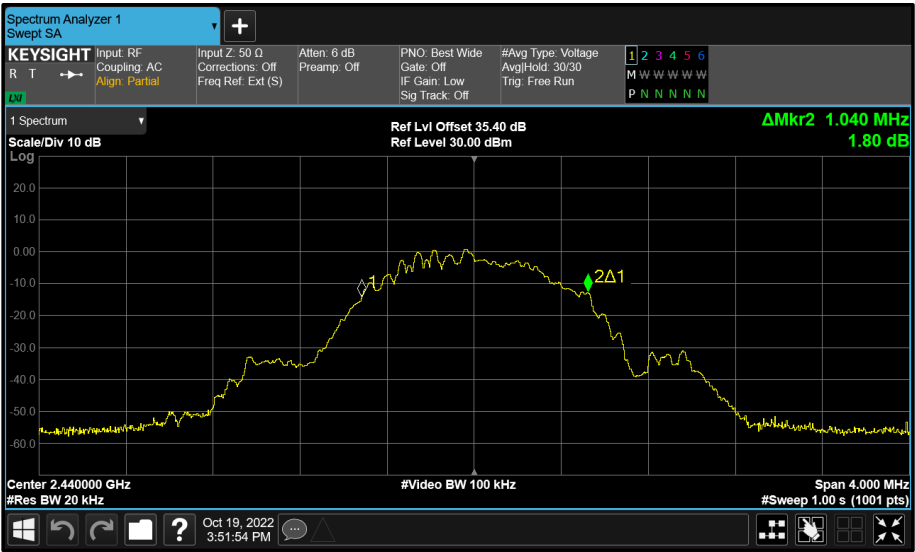


Figure 147 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

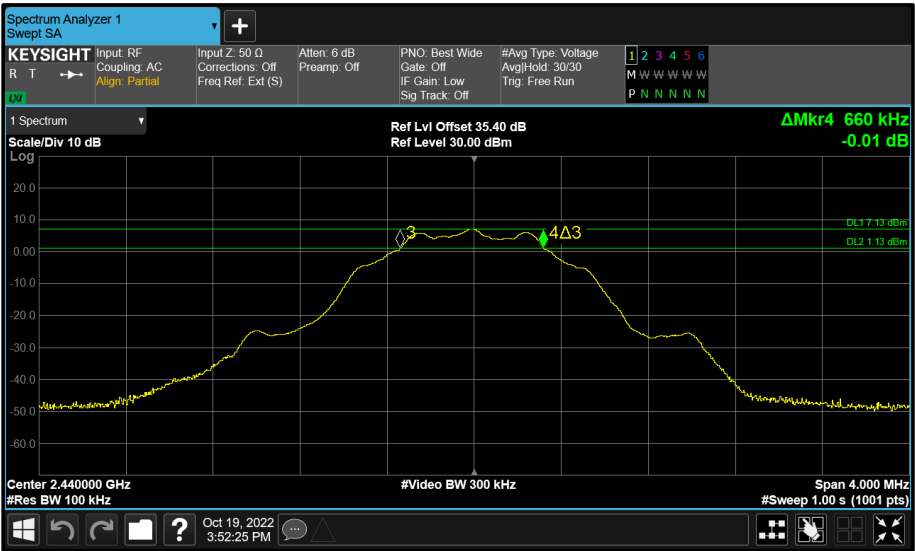


Figure 148 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

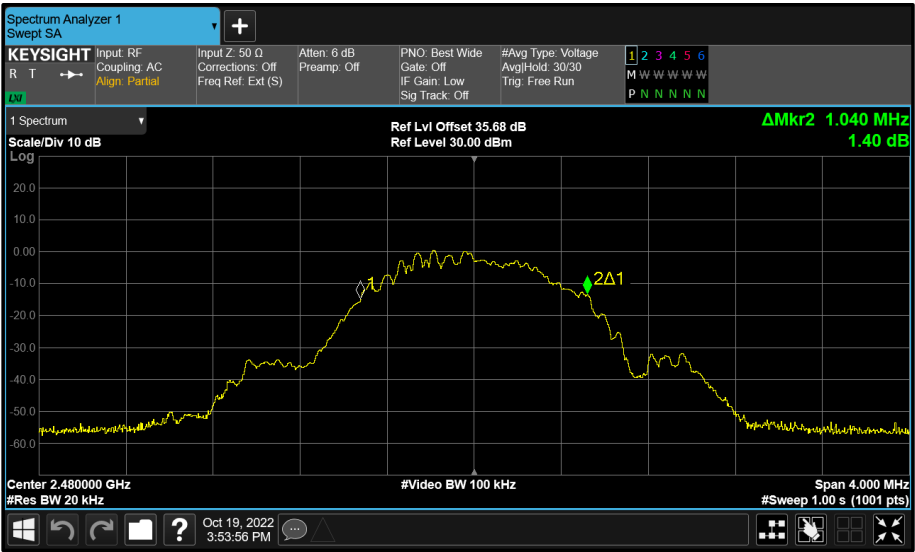


Figure 149 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

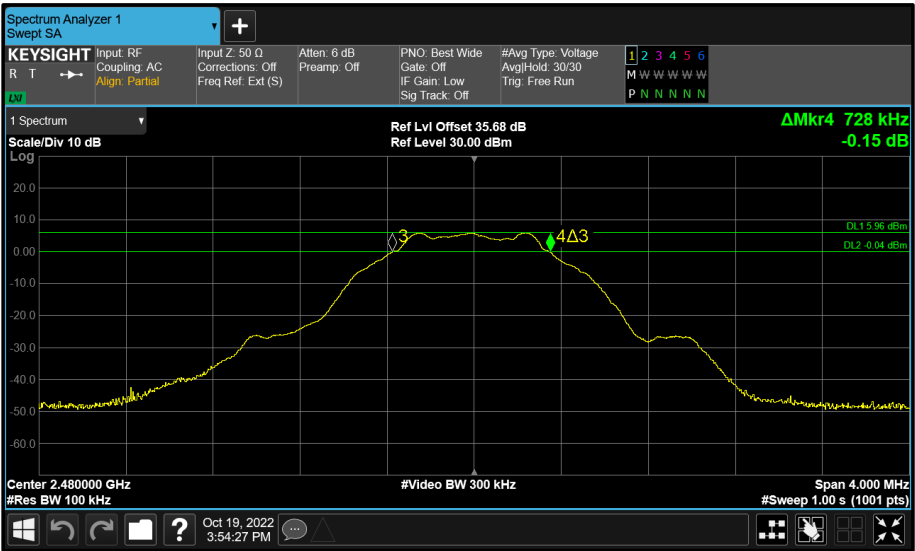


Figure 150 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

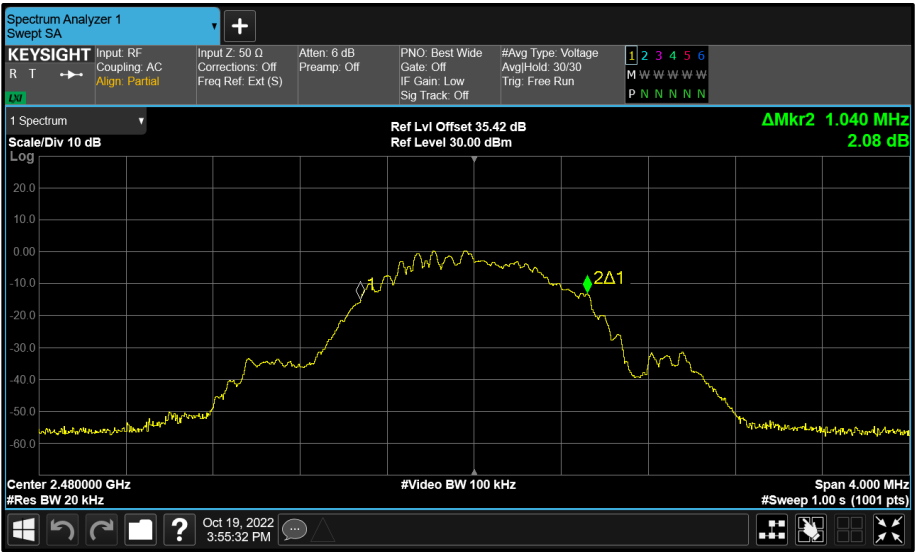


Figure 151 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

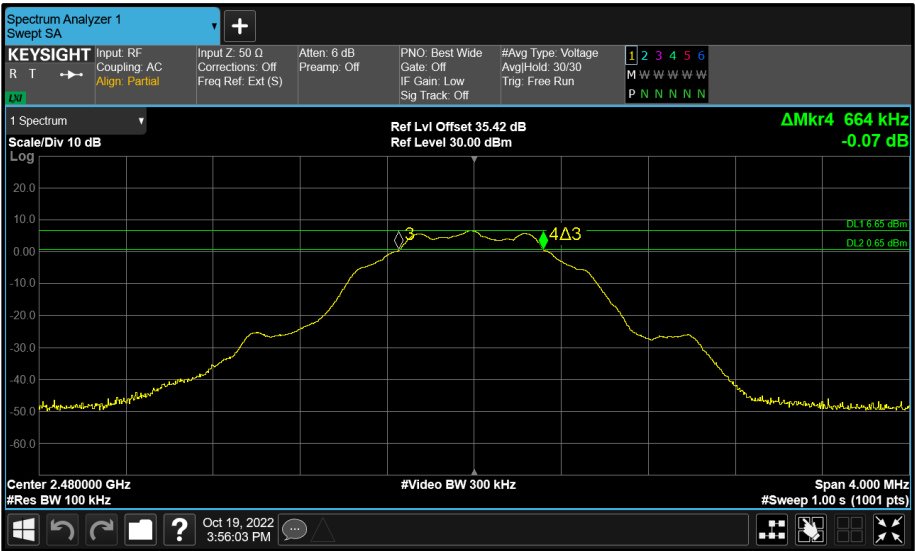


Figure 152 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (a)(2) RSS-247 5.2 a)	Test Method(s):	C63.10 6.9.3 C63.10 11.8.1
Additional Reference(s):	-		

DUT Configuration			
Mode:	iPA GFSK (LE2M)	Duty Cycle (%):	-
Antenna Configuration:	Beamforming	DCCF (dB):	-
Active Port(s):	A+B (Core 0 + Core 1)	Peak Antenna Gain (dBi):	-

Test Frequency (MHz)	6 dB Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	1.168	1.136	-	-	≥500.0
2440	1.160	1.136	-	-	≥500.0
2480	1.184	1.152	-	-	≥500.0

Table 56 - 6 dB Bandwidth Results

Test Frequency (MHz)	99% Bandwidth (MHz)				Limit (kHz)
	A	B	C	D	
2402	2.048	2.056	-	-	-
2440	2.048	2.056	-	-	-
2480	2.040	2.048	-	-	-

Table 57 - 99% Bandwidth Results

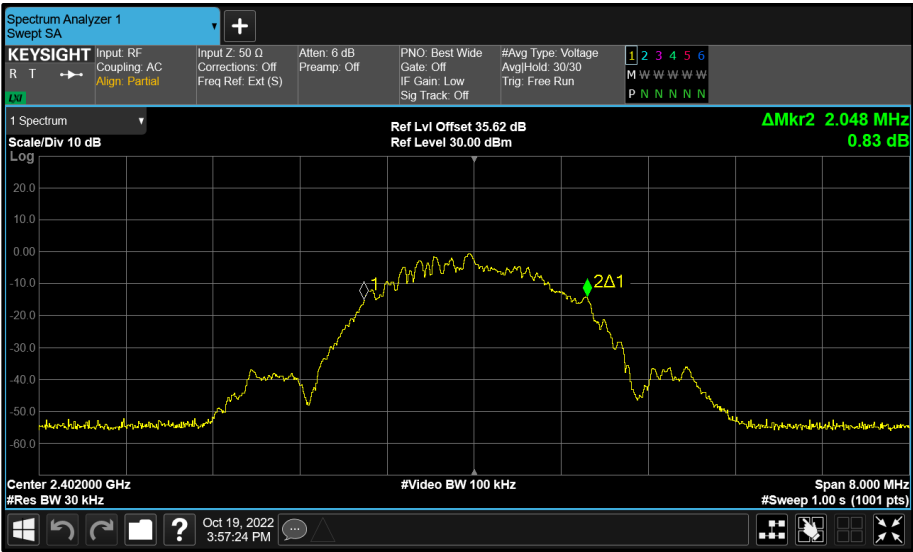


Figure 153 - Core 0 (A) 2402 MHz (CH37) 99% Bandwidth

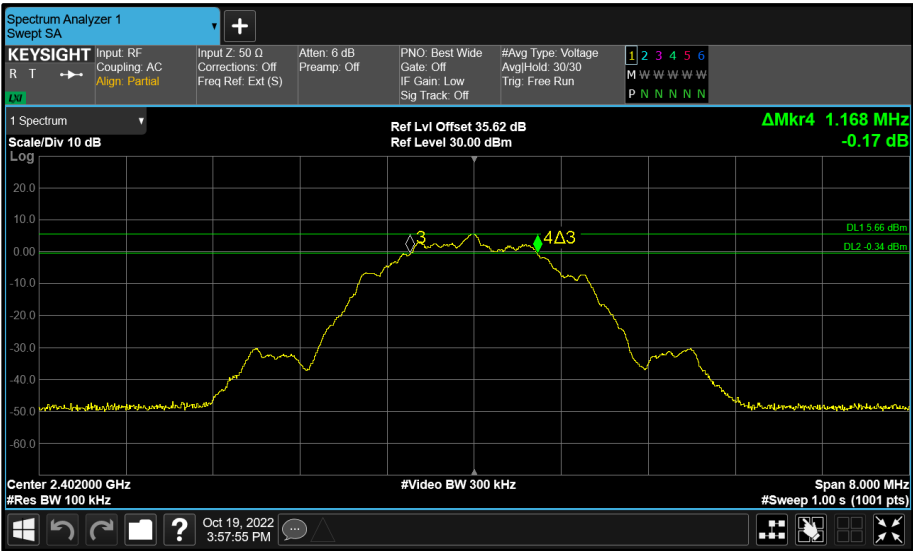


Figure 154 - Core 0 (A) 2402 MHz (CH37) 6 dB Bandwidth

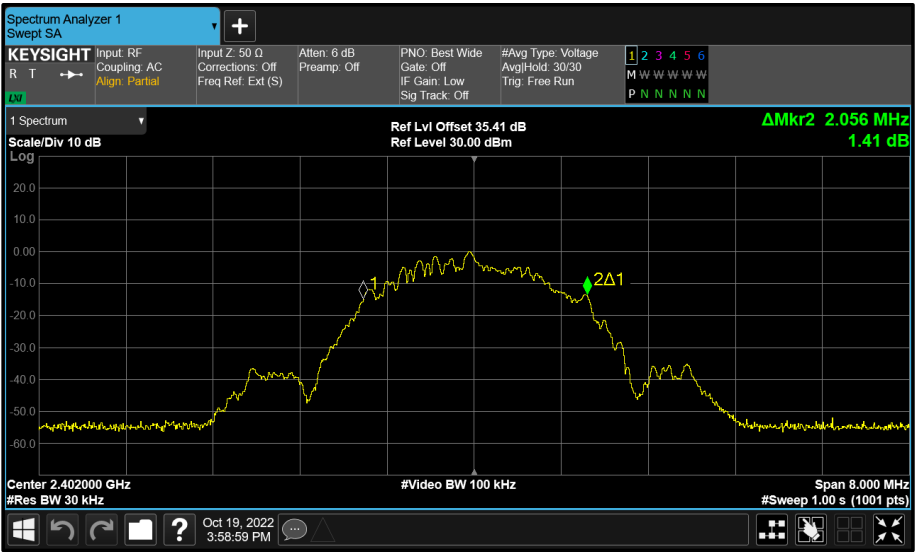


Figure 155 - Core 1 (B) 2402 MHz (CH37) 99% Bandwidth

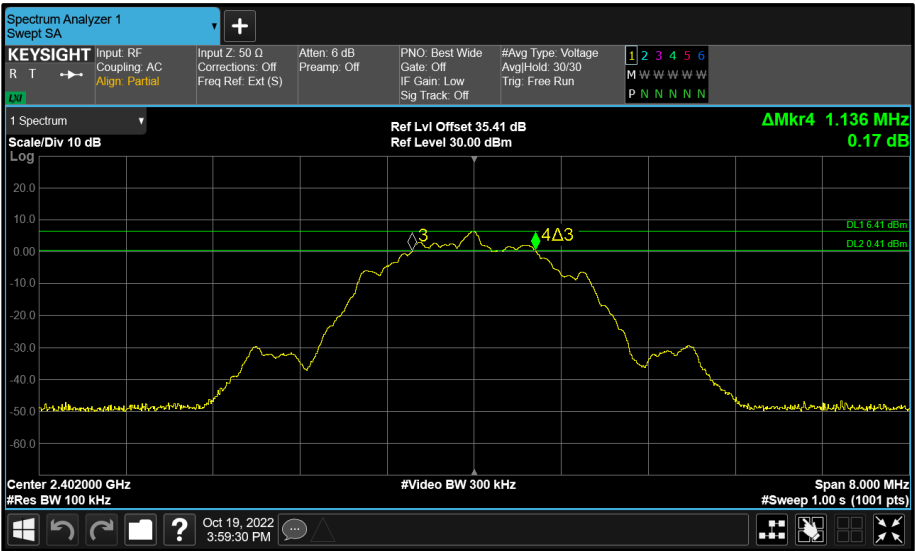


Figure 156 - Core 1 (B) 2402 MHz (CH37) 6 dB Bandwidth

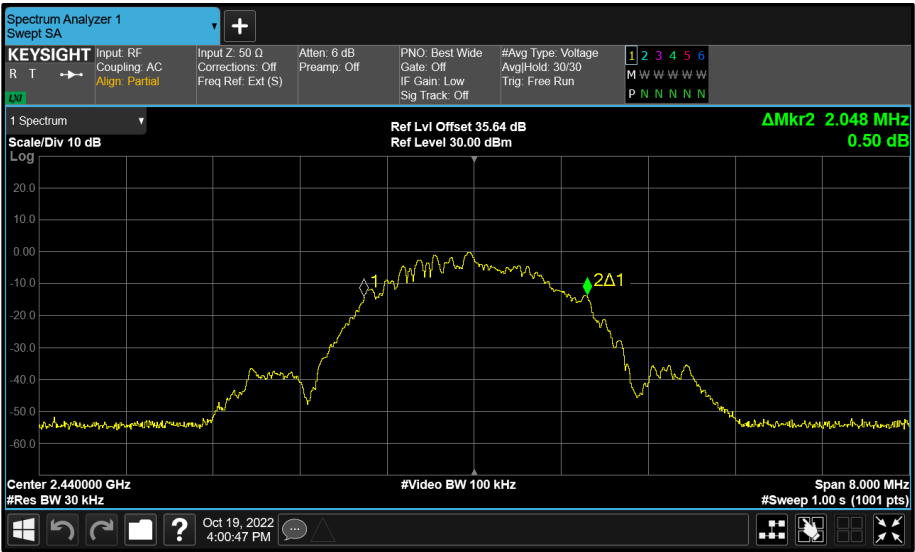


Figure 157 - Core 0 (A) 2440 MHz (CH17) 99% Bandwidth

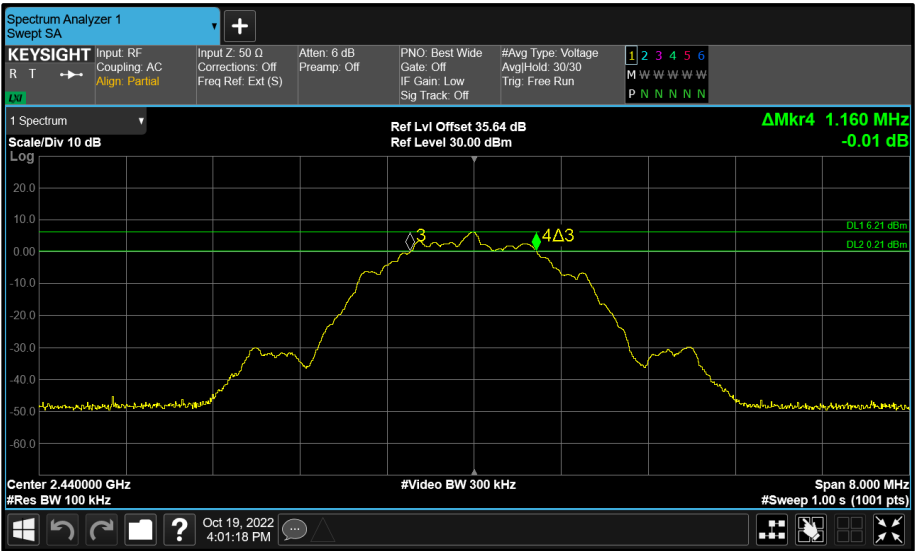


Figure 158 - Core 0 (A) 2440 MHz (CH17) 6 dB Bandwidth

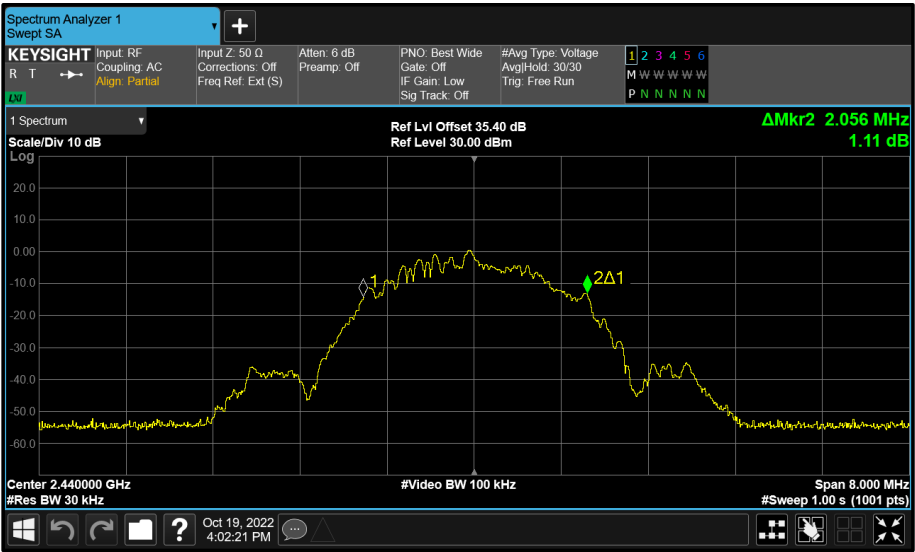


Figure 159 - Core 1 (B) 2440 MHz (CH17) 99% Bandwidth

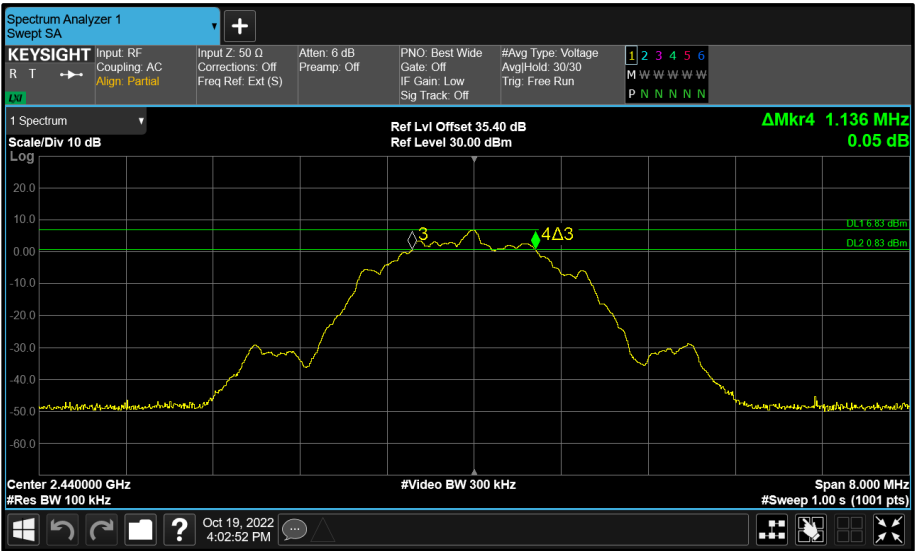


Figure 160 - Core 1 (B) 2440 MHz (CH17) 6 dB Bandwidth

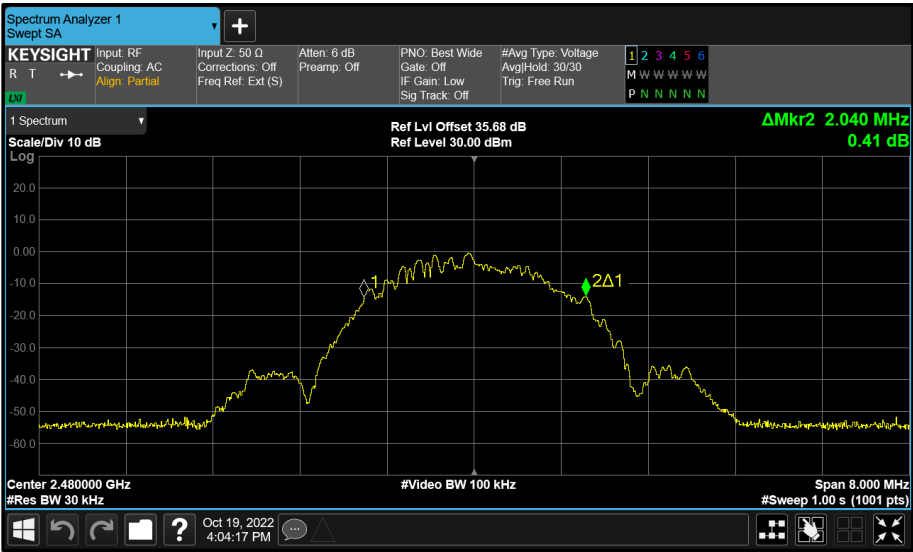


Figure 161 - Core 0 (A) 2480 MHz (CH39) 99% Bandwidth

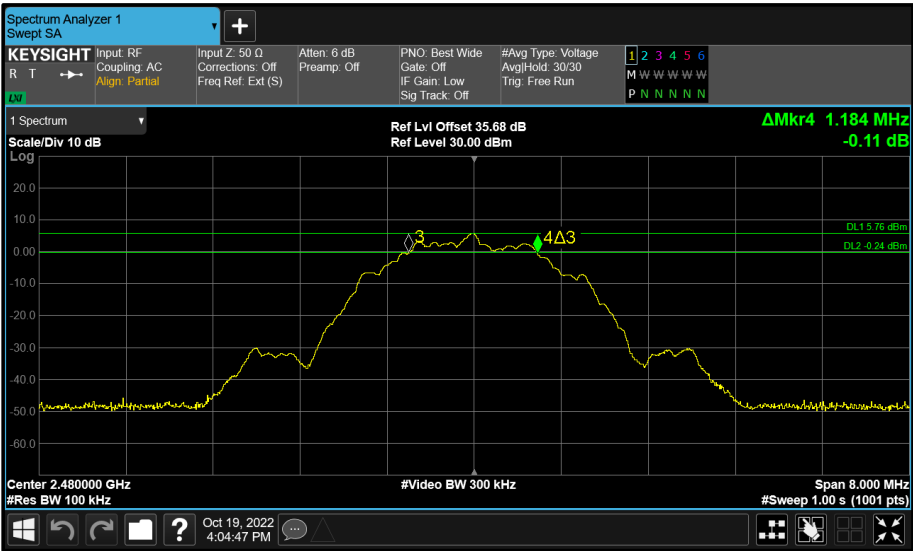


Figure 162 - Core 0 (A) 2480 MHz (CH39) 6 dB Bandwidth

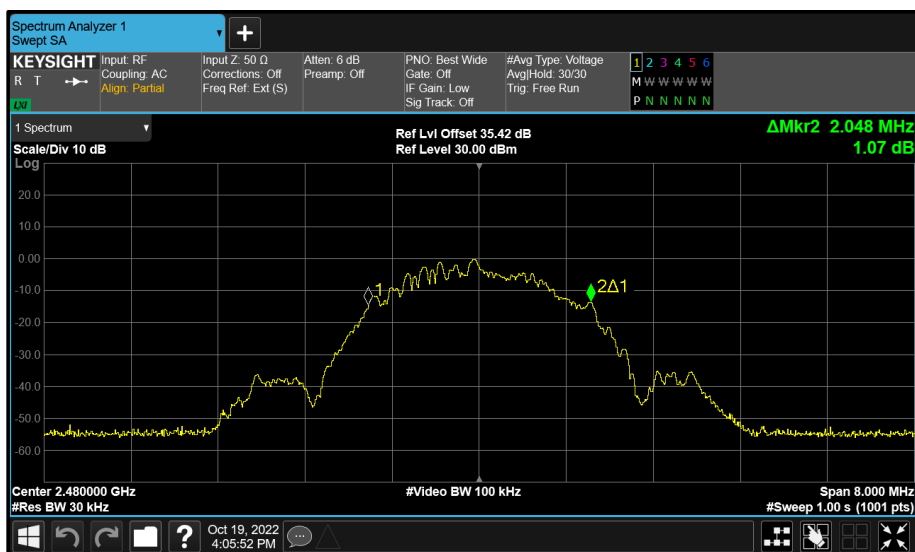


Figure 163 - Core 1 (B) 2480 MHz (CH39) 99% Bandwidth

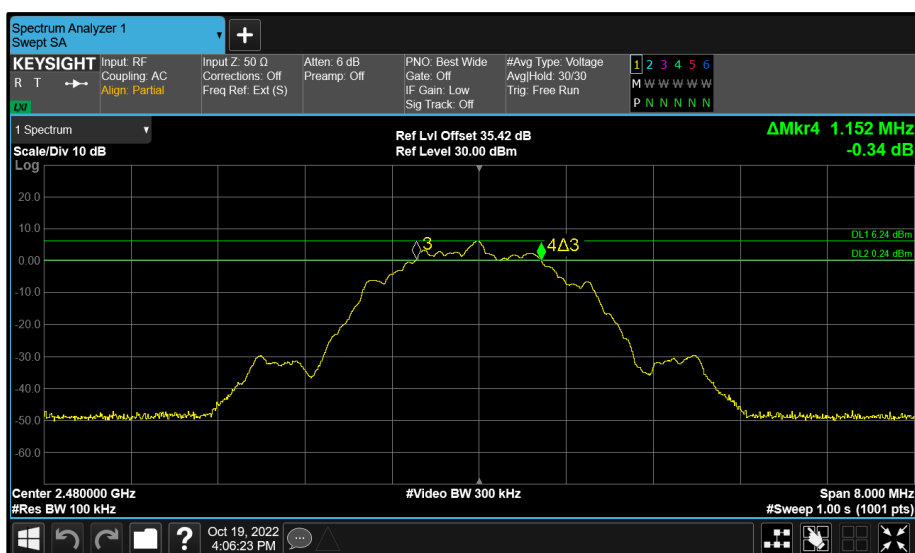


Figure 164 - Core 1 (B) 2480 MHz (CH39) 6 dB Bandwidth

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISED RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.



2.2.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series III	611	12	21-Dec-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	13-Sep-2024
Signal Conditioning Unit	TUV SUD	SPECTRUM SCU002	5759	12	05-Jul-2023

Table 58

O/P Mon – Output Monitored using calibrated equipment