

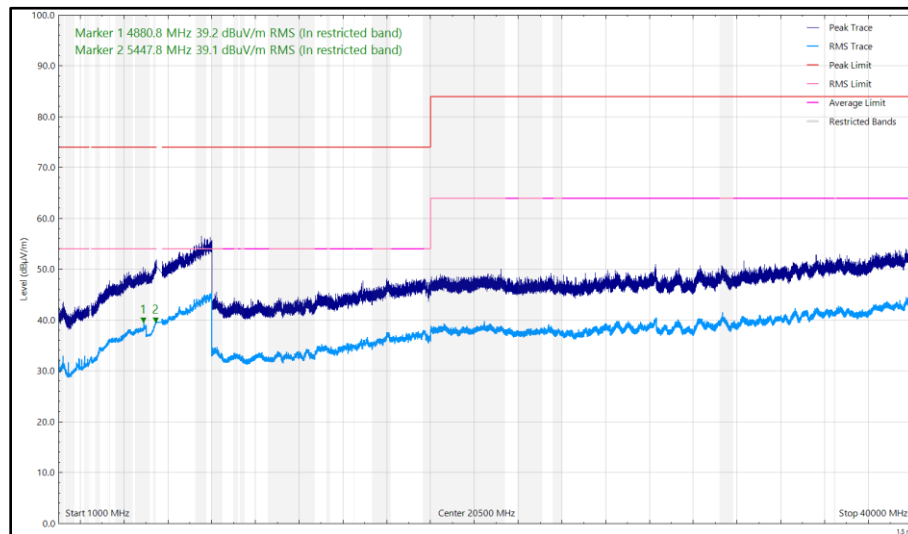


Figure 67 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

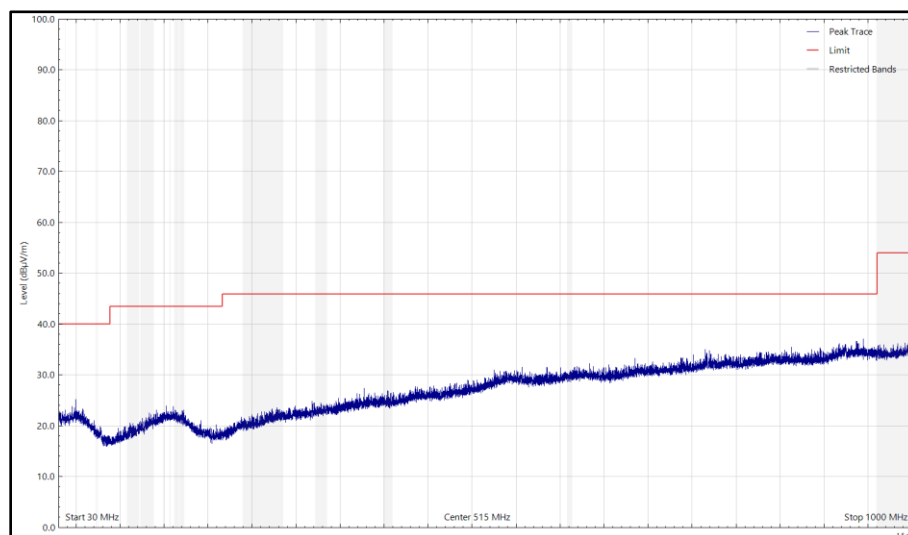


Figure 68 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

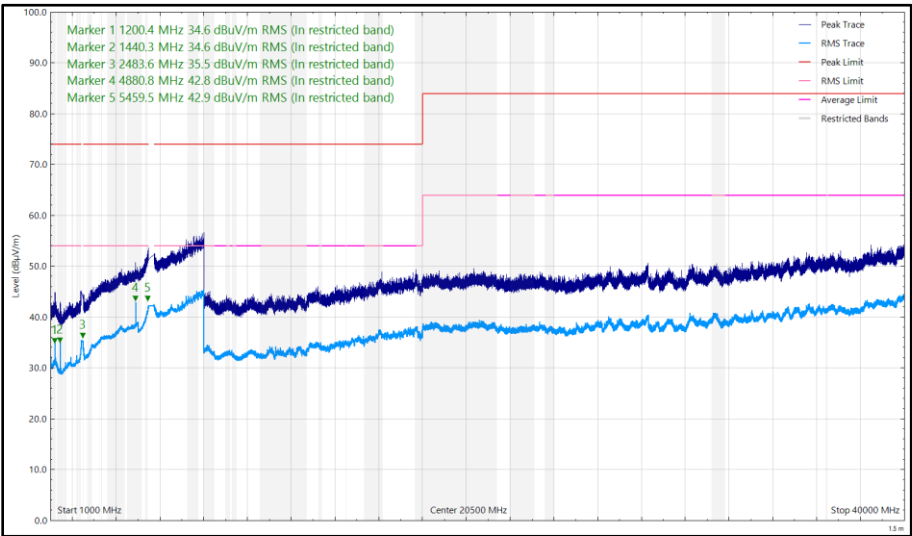


Figure 69 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1200.460	34.18	54.00	-19.82	RMS	172	312	Vertical
1440.036	34.38	54.00	-19.62	RMS	242	345	Vertical
4879.103	44.46	54.00	-9.54	RMS	276	130	Vertical
4879.238	37.85	54.00	-16.15	RMS	148	351	Horizontal
5455.788	41.85	54.00	-12.15	RMS	6	100	Vertical
5459.666	39.24	54.00	-14.76	RMS	235	123	Horizontal

Table 26 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

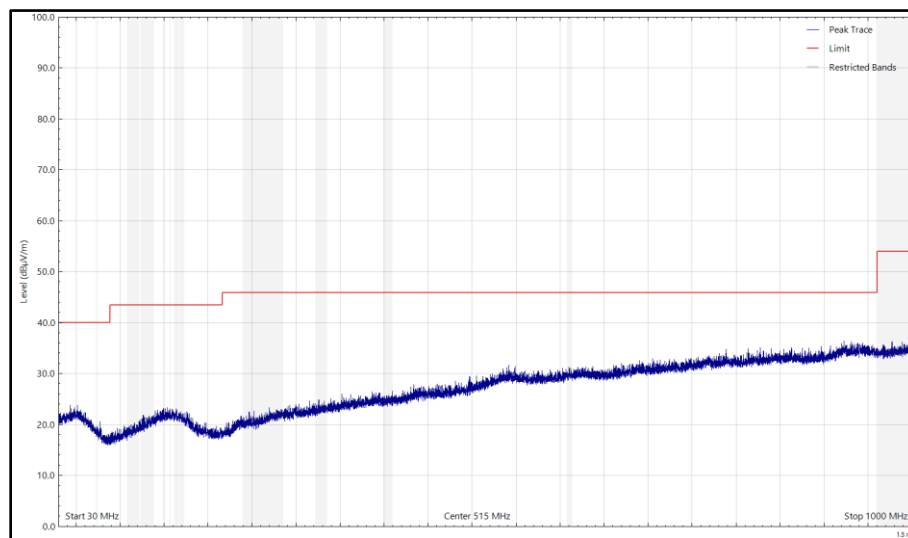


Figure 70 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

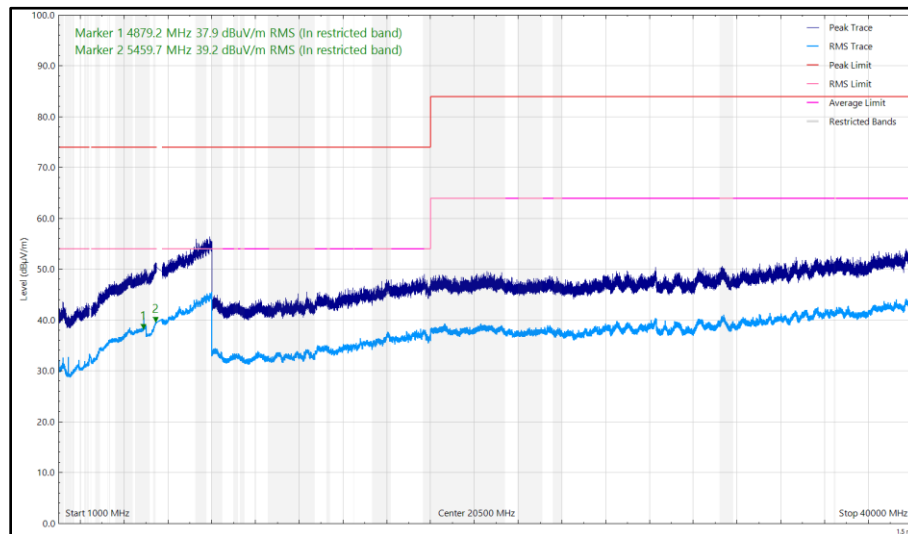


Figure 71 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Horizontal

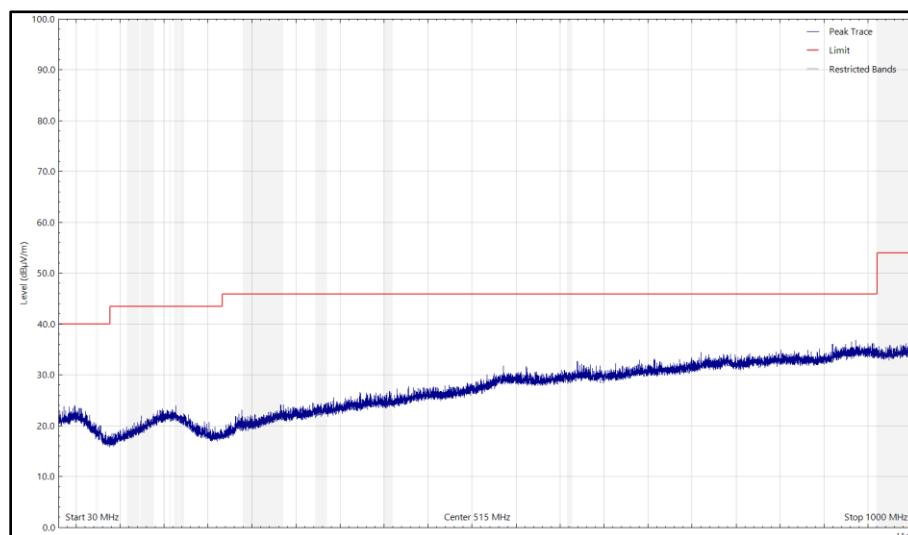


Figure 72 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

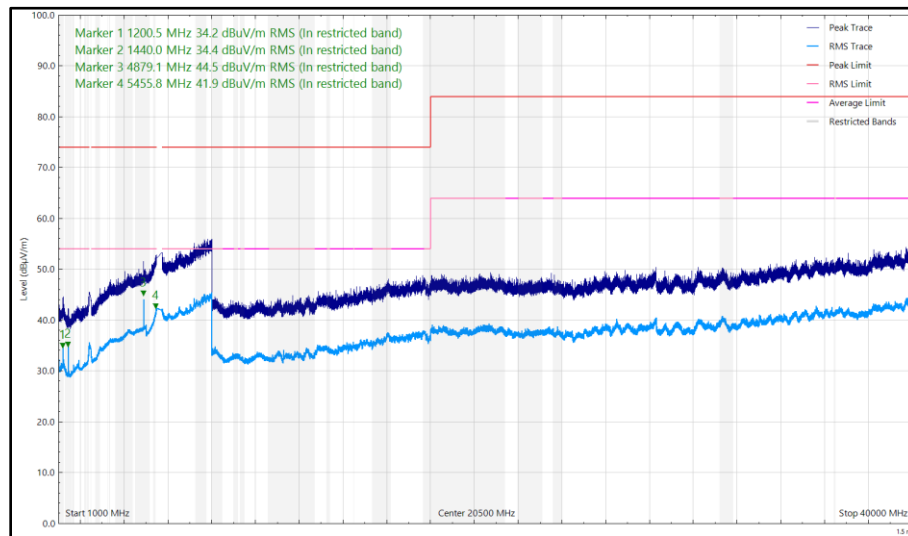


Figure 73 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1200.885	34.56	54.00	-19.44	RMS	155	272	Vertical
1440.651	34.81	54.00	-19.19	RMS	217	152	Vertical
2484.029	35.54	54.00	-18.46	RMS	155	100	Vertical
4879.193	42.33	54.00	-11.67	RMS	324	341	Vertical
4892.055	37.74	54.00	-16.26	RMS	70	259	Horizontal

Table 27 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

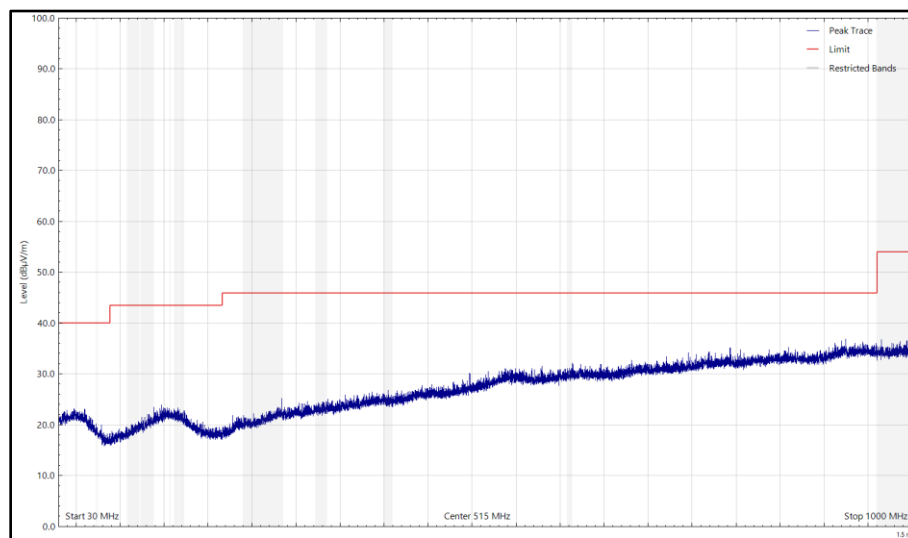


Figure 74 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

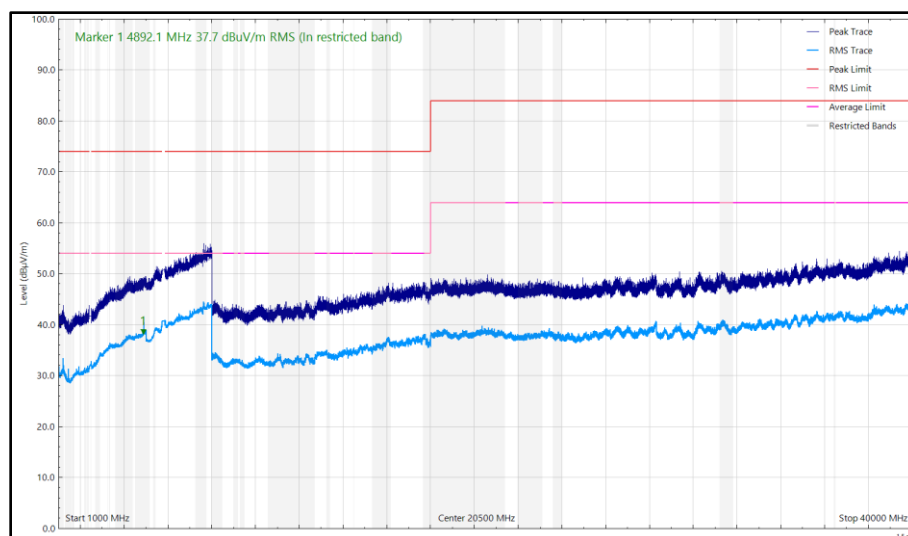


Figure 75 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

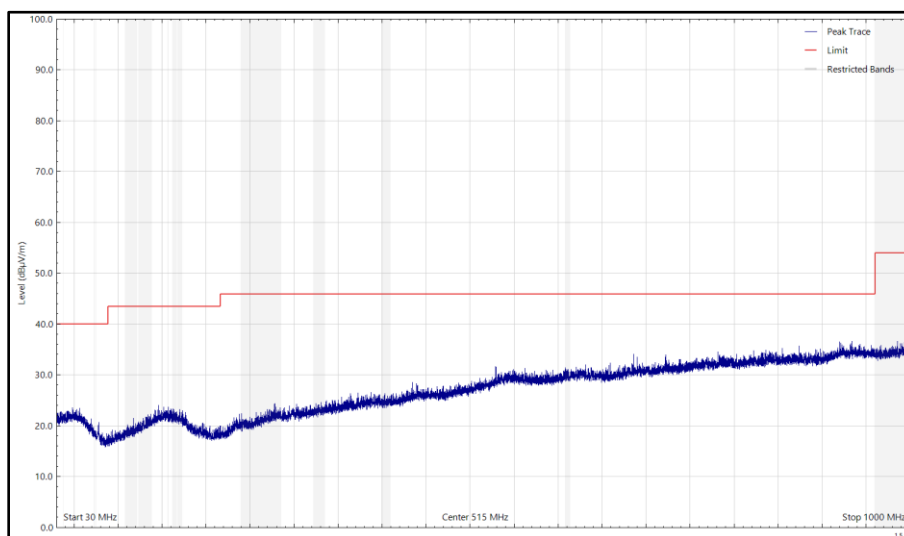


Figure 76 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

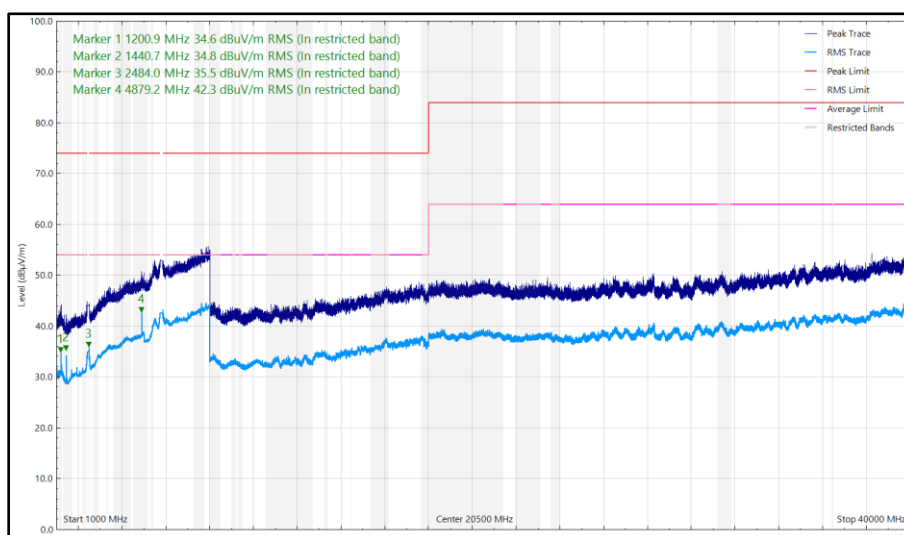


Figure 77 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1207.748	34.44	54.00	-19.56	RMS	165	260	Vertical
4879.013	43.97	54.00	-10.03	RMS	278	139	Vertical
4880.912	39.39	54.00	-14.61	RMS	182	100	Horizontal
5436.630	39.09	54.00	-14.91	RMS	317	400	Horizontal
5447.745	39.68	54.00	-14.32	RMS	13	216	Vertical

Table 28 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

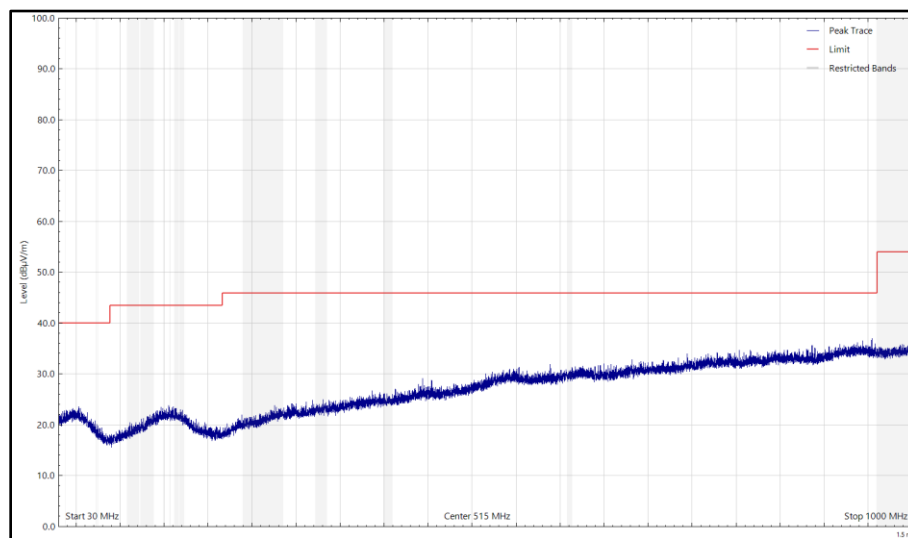


Figure 78 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

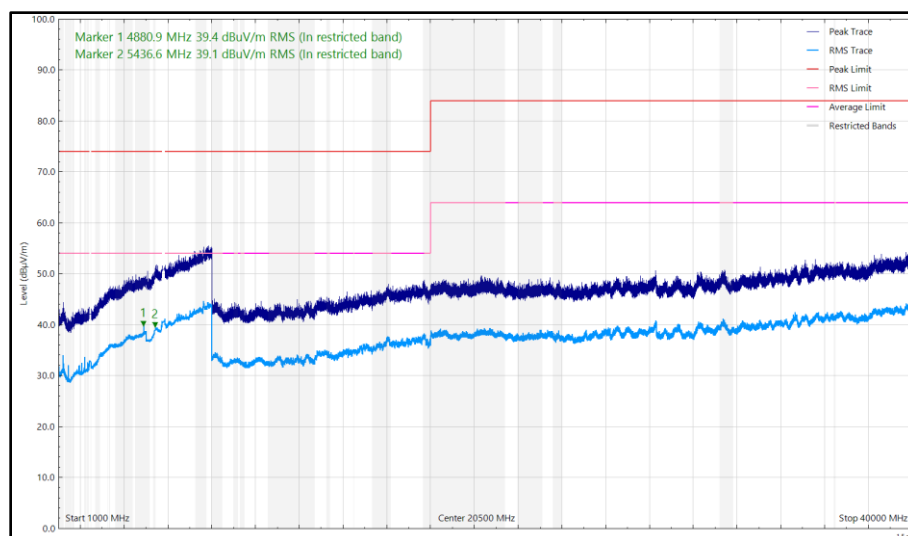


Figure 79 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Horizontal

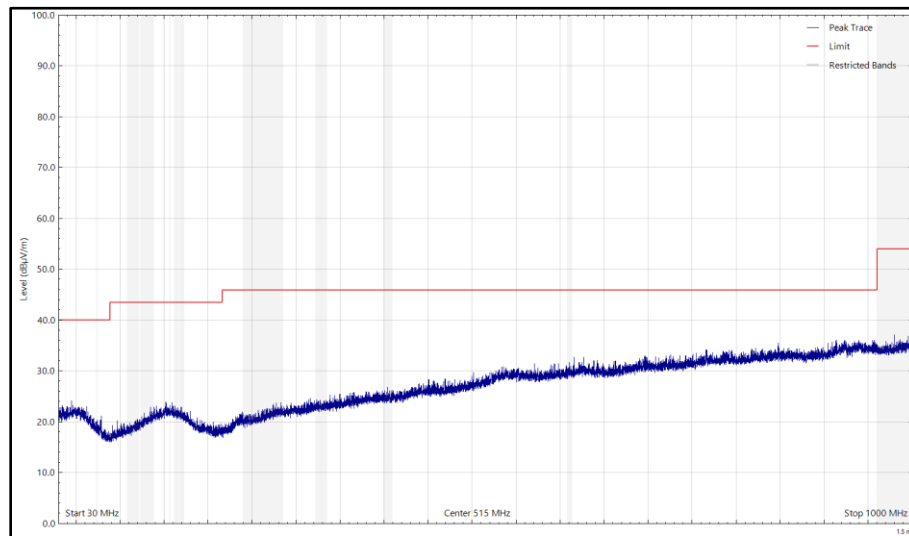


Figure 80 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

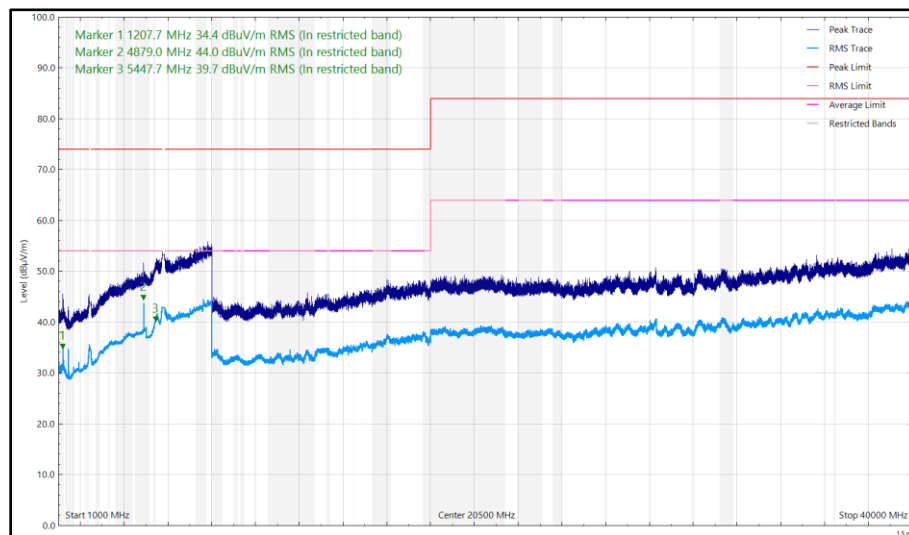


Figure 81 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1206.345	35.80	54.00	-18.20	RMS	147	263	Vertical
4879.153	43.43	54.00	-10.57	RMS	273	159	Vertical
4880.902	38.90	54.00	-15.10	RMS	308	395	Horizontal
5395.591	42.34	54.00	-11.66	RMS	89	125	Vertical
5446.277	39.63	54.00	-14.37	RMS	197	114	Horizontal

Table 29 - U-NII-1 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

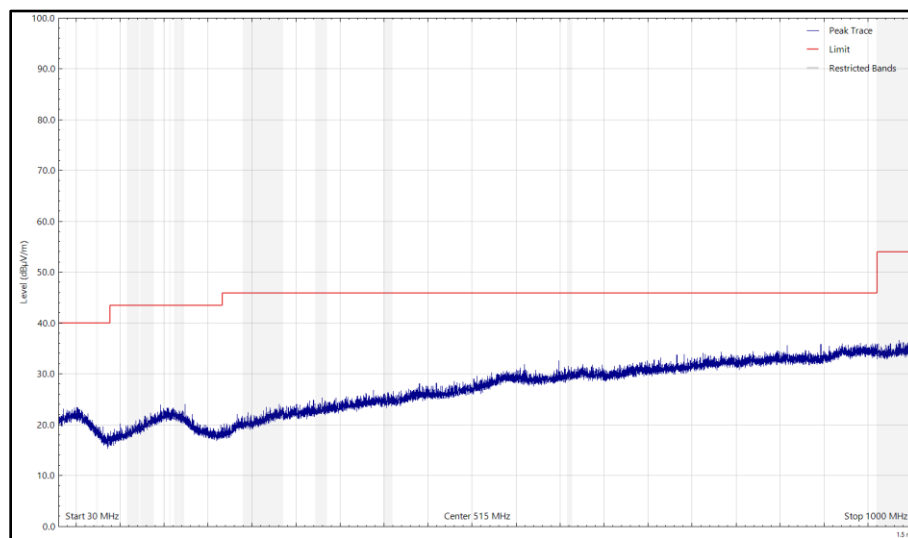


Figure 82 - U-NII-1 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

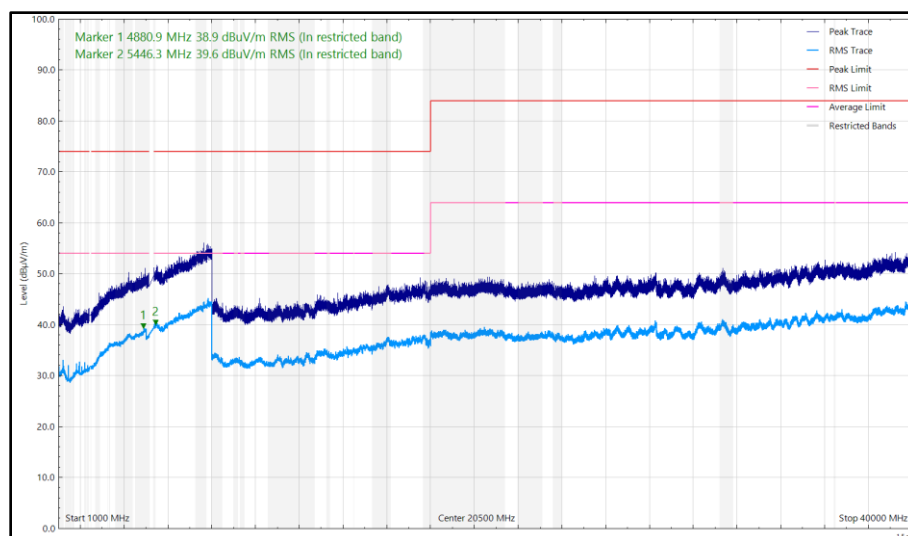


Figure 83 - U-NII-1 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Horizontal

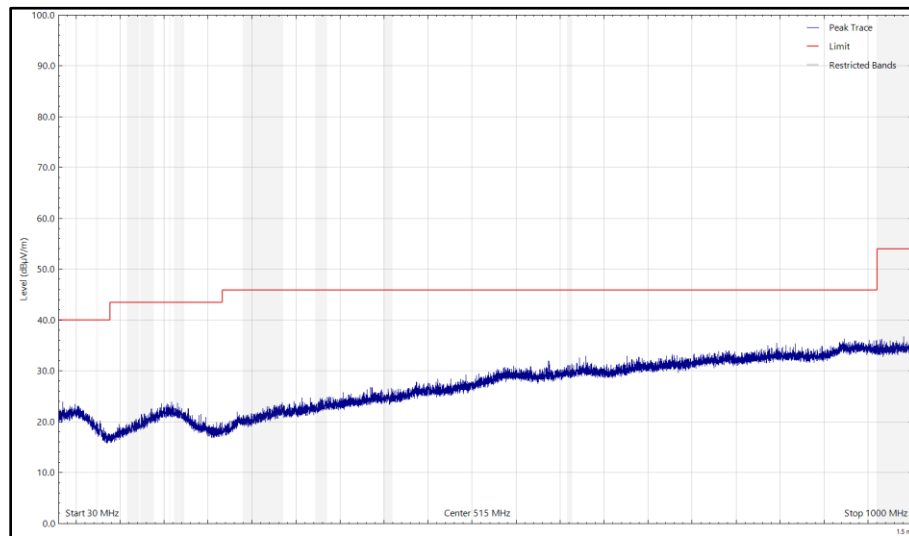


Figure 84 - U-NII-1 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

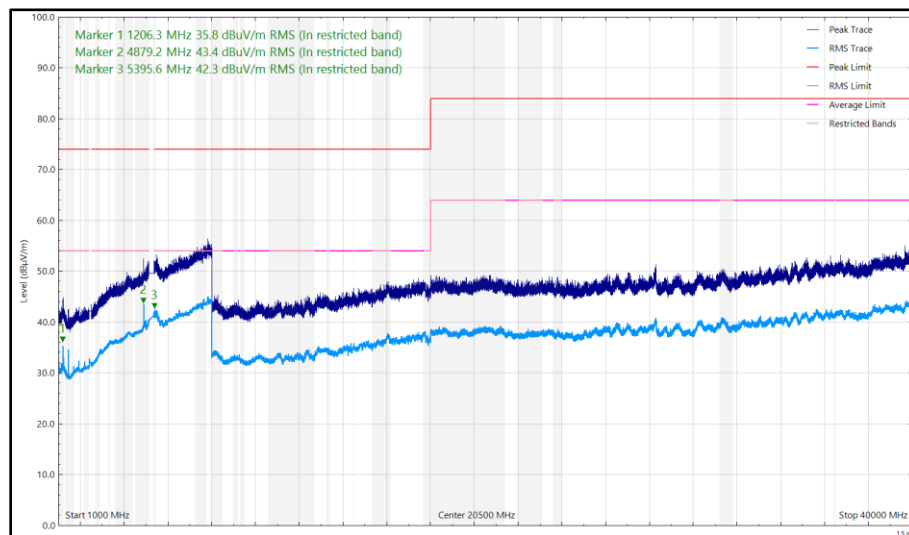


Figure 85 - U-NII-1 - 5240 MHz (CH48), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1200.055	34.59	54.00	-19.41	RMS	149	358	Vertical
4878.913	37.92	54.00	-16.08	RMS	232	143	Horizontal
4879.153	40.79	54.00	-13.21	RMS	242	286	Vertical

Table 30 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

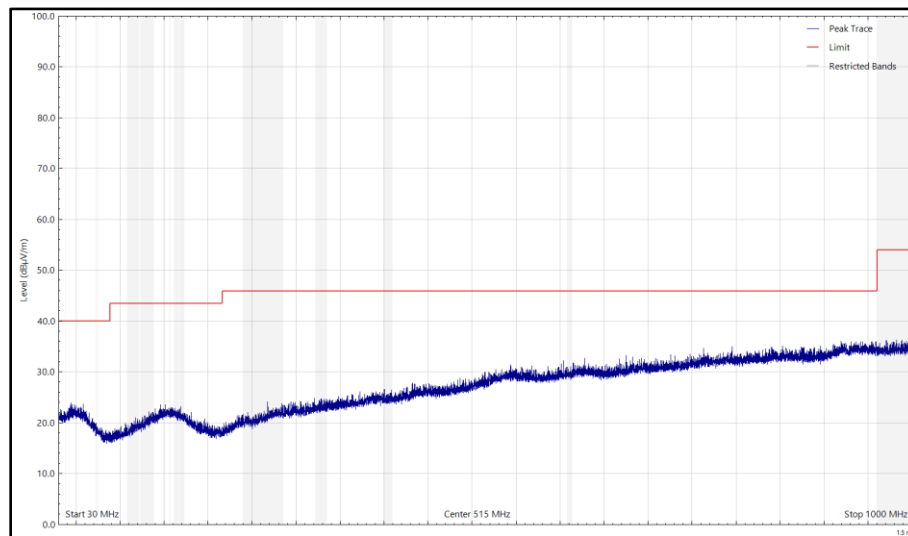


Figure 86 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

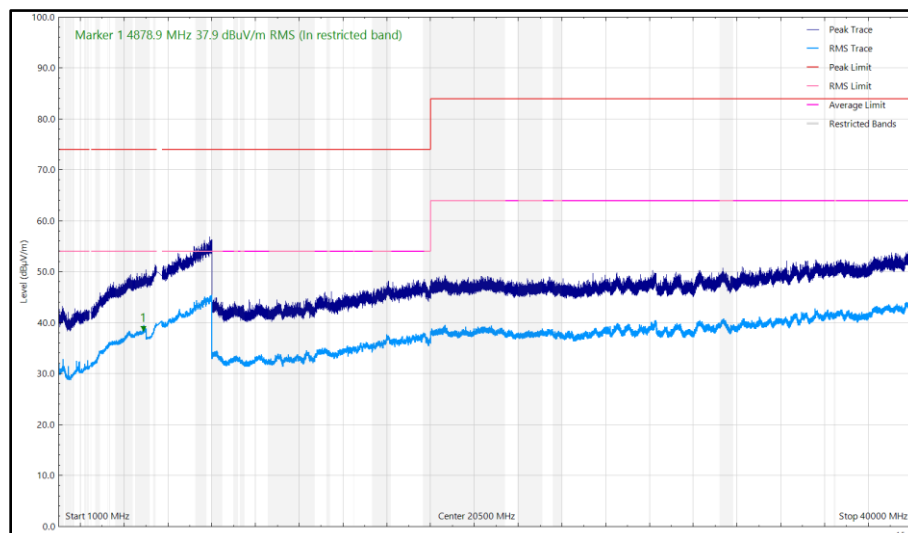


Figure 87 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Horizontal

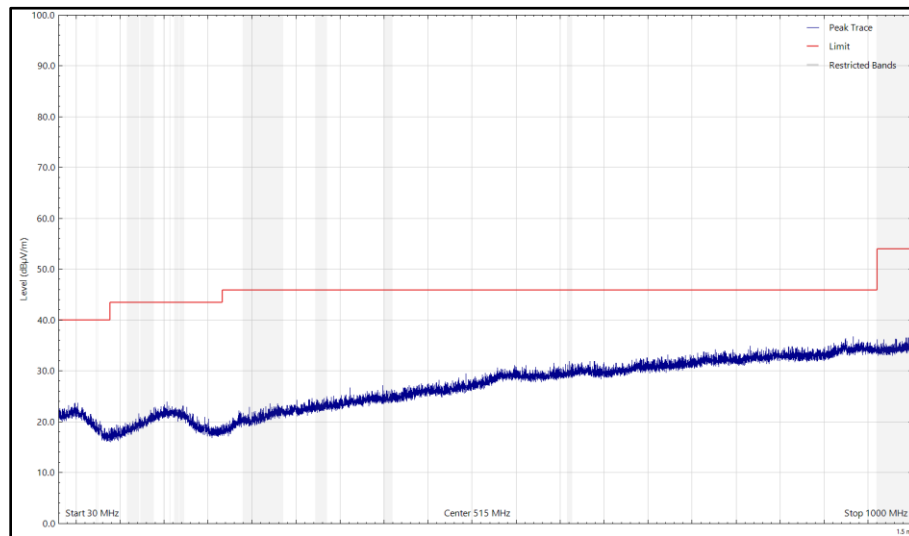


Figure 88 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

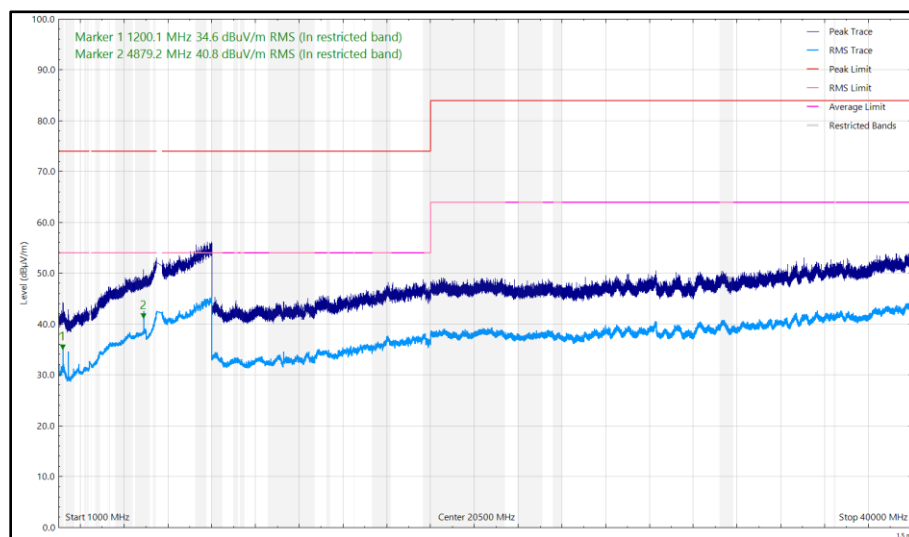


Figure 89 - U-NII-2C - 5640 MHz (CH128), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
1200.542	35.05	54.00	-18.95	RMS	145	252	Vertical
1440.839	35.98	54.00	-18.02	RMS	189	198	Vertical
4880.782	37.88	54.00	-16.12	RMS	198	178	Horizontal
4880.932	44.15	54.00	-9.85	RMS	86	128	Vertical
5457.838	41.20	54.00	-12.80	RMS	2	115	Vertical
5458.905	38.80	54.00	-15.20	RMS	305	170	Horizontal

Table 31 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

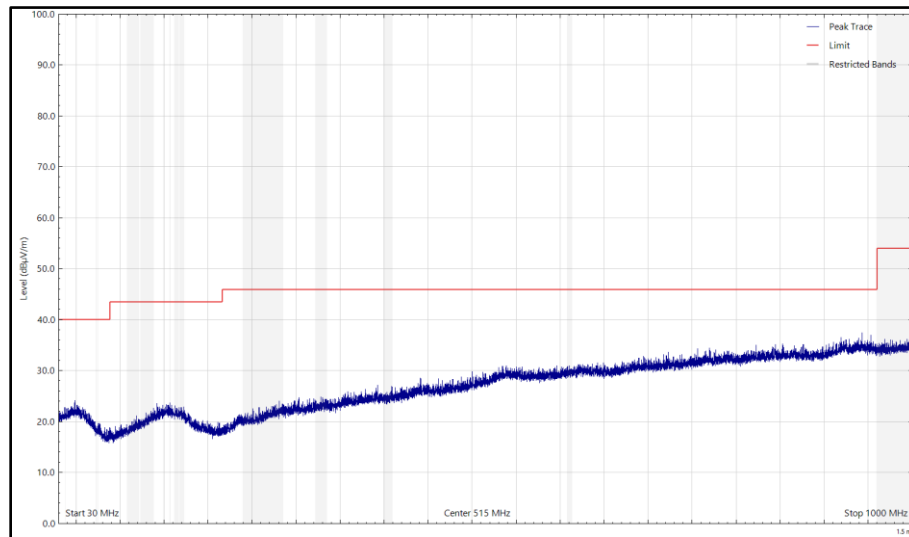


Figure 90 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

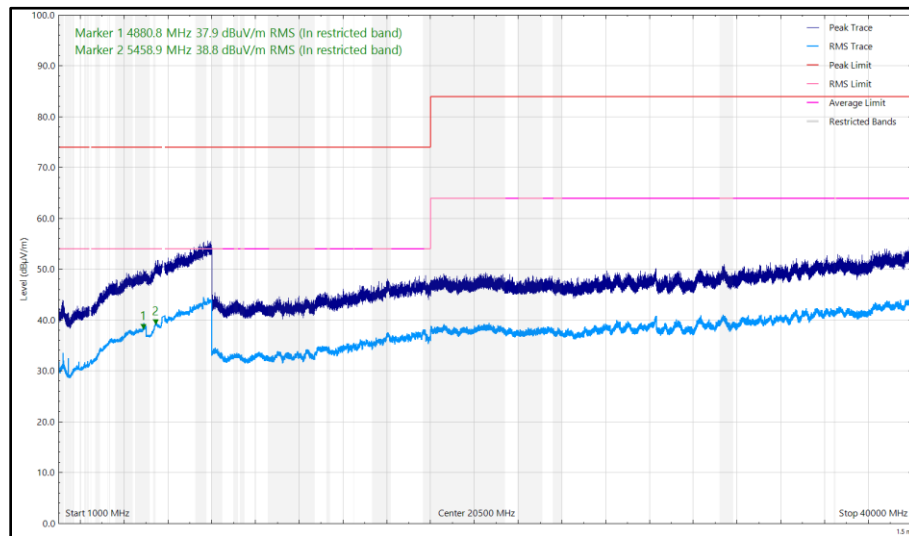


Figure 91 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Horizontal

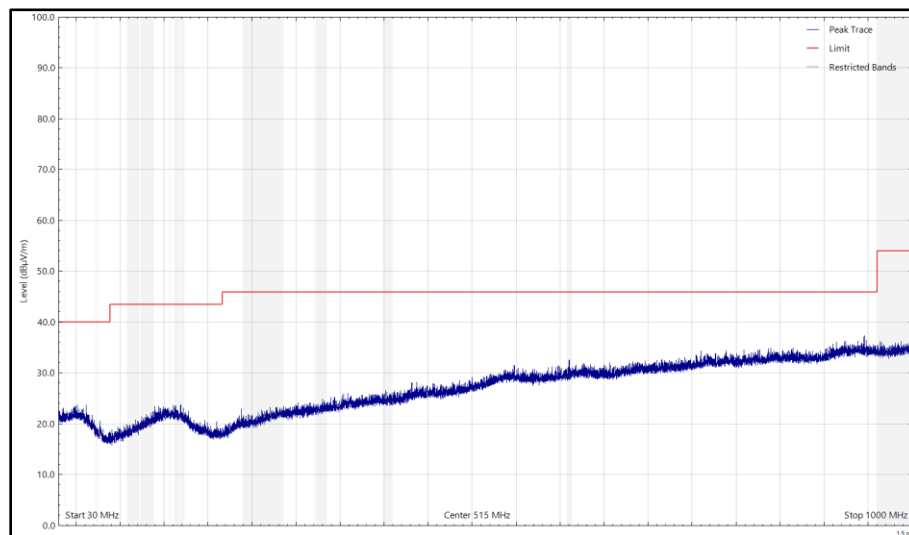


Figure 92 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

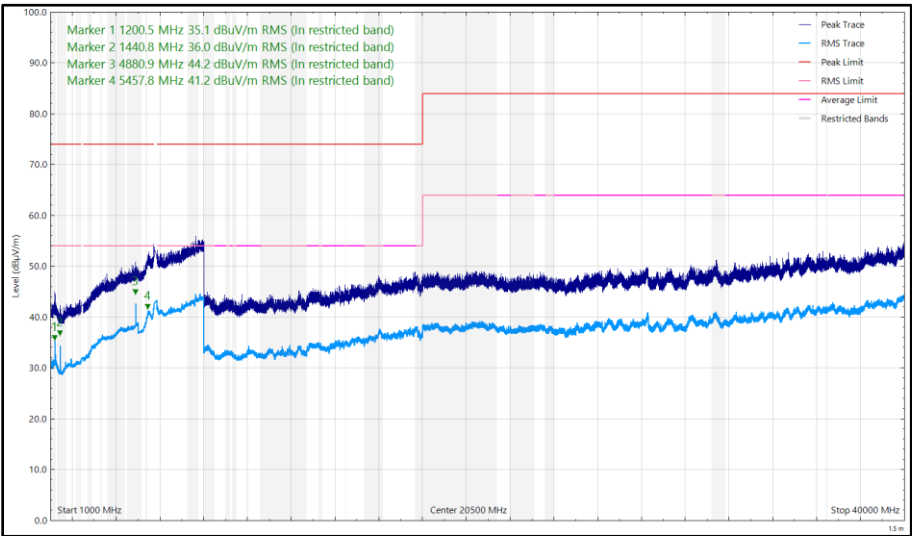


Figure 93 - U-NII-3 - 5785 MHz (CH157), HT20, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Vertical

FCC 47 CFR Part 15, ISSED RSS-247 and ISSED RSS-GEN

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d) / RSS-247 Clause 5.5	-20 dBc
Part 15.407 (b) / RSS-247 Clause 6.2	-27 dBm e.i.r.p
Part 15.209 / RSS-GEN Clause 8.9	Peak: 74 dBμV/m at 3m, Average 54 dBμV/m at 3m (Restricted bands > 1 GHz)

Table 32

6 GHz WLAN and Thread

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2483.556	35.54	54.00	-18.46	RMS	8	169	Vertical
7318.580	41.10	54.00	-12.90	RMS	210	348	Horizontal
7318.603	47.06	54.00	-6.94	RMS	47	105	Vertical

Table 33 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

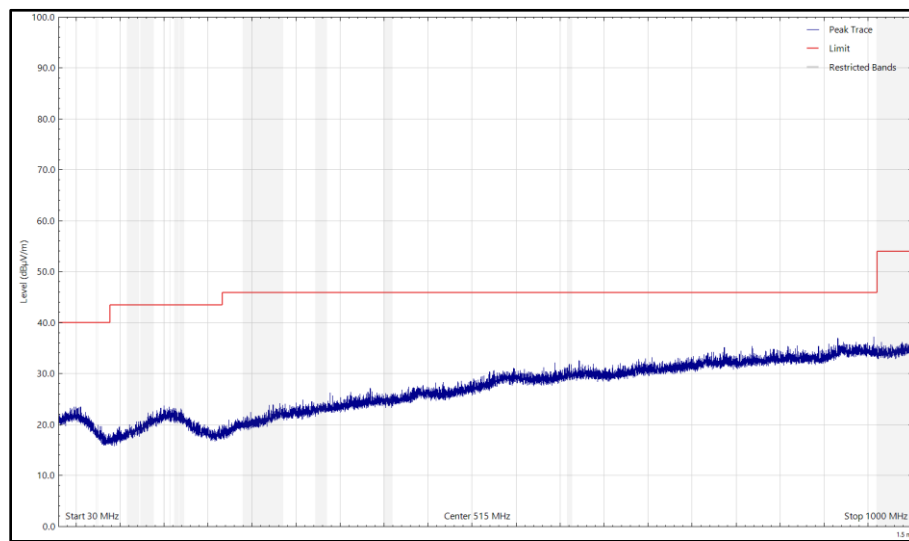


Figure 94 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

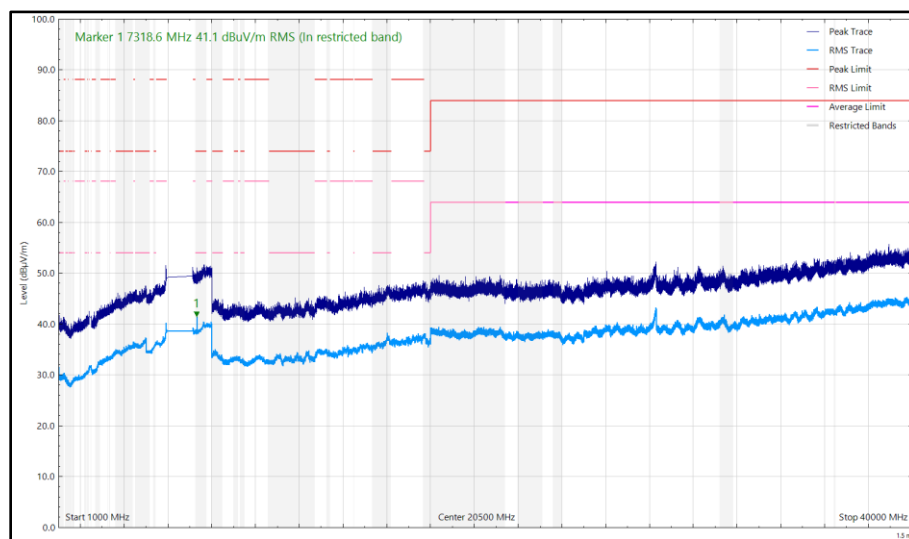


Figure 95 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

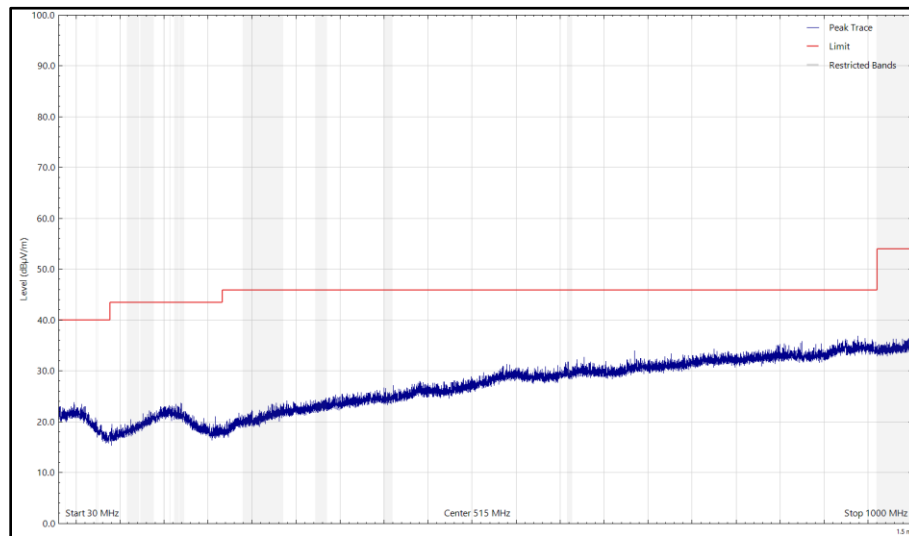


Figure 96 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

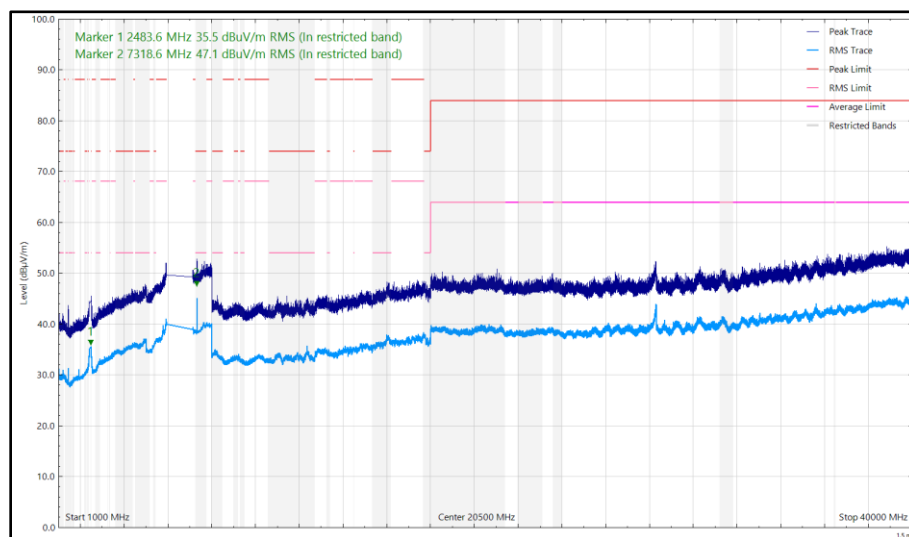


Figure 97 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.068	35.02	54.00	-18.98	RMS	279	183	Vertical
4879.133	37.41	54.00	-16.59	RMS	256	381	Vertical

Table 34 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

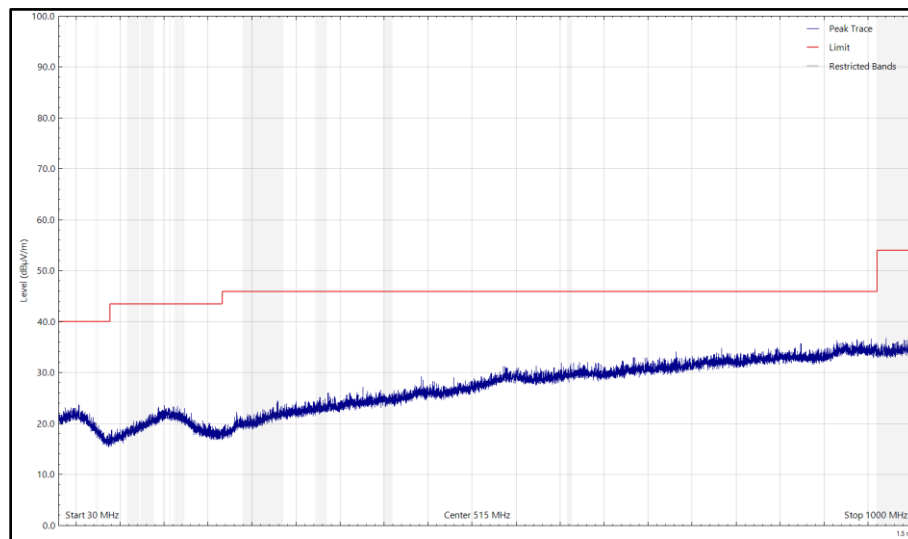


Figure 98 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

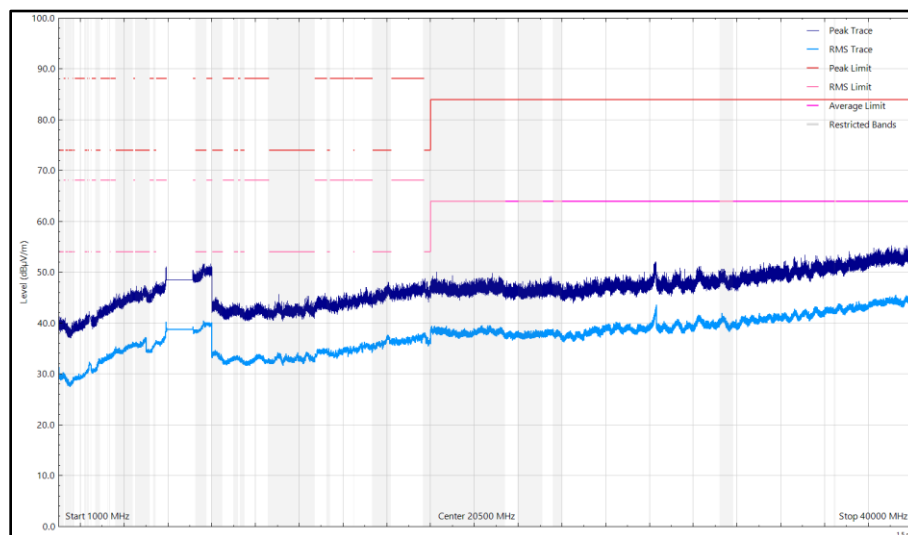


Figure 99 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Horizontal

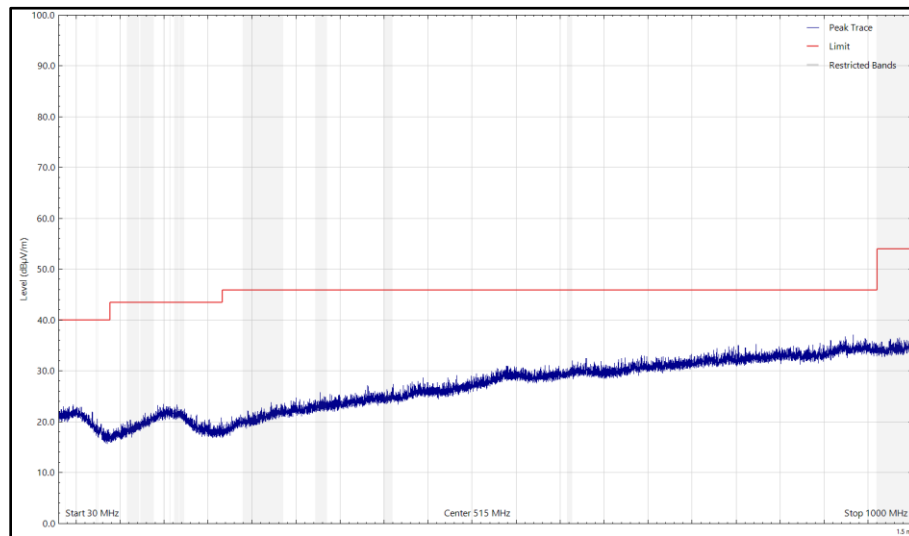


Figure 100 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

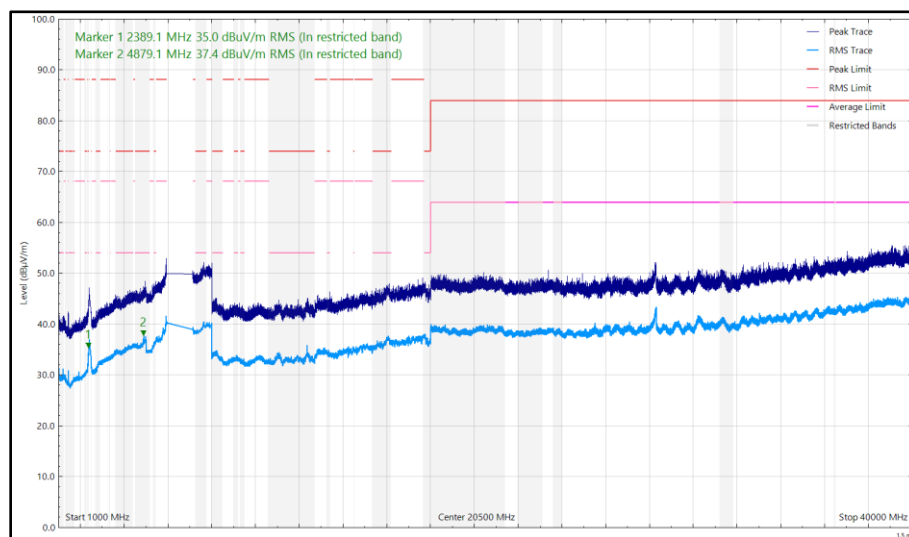


Figure 101 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2483.729	35.30	54.00	-18.70	RMS	8	231	Vertical
7318.601	42.45	54.00	-11.55	RMS	334	364	Horizontal
7318.640	47.07	54.00	-6.93	RMS	294	158	Vertical
7321.483	56.05	74.00	-17.95	Peak	295	156	Vertical
20984.475	46.75	63.50	-16.75	RMS	159	100	Vertical

Table 35 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

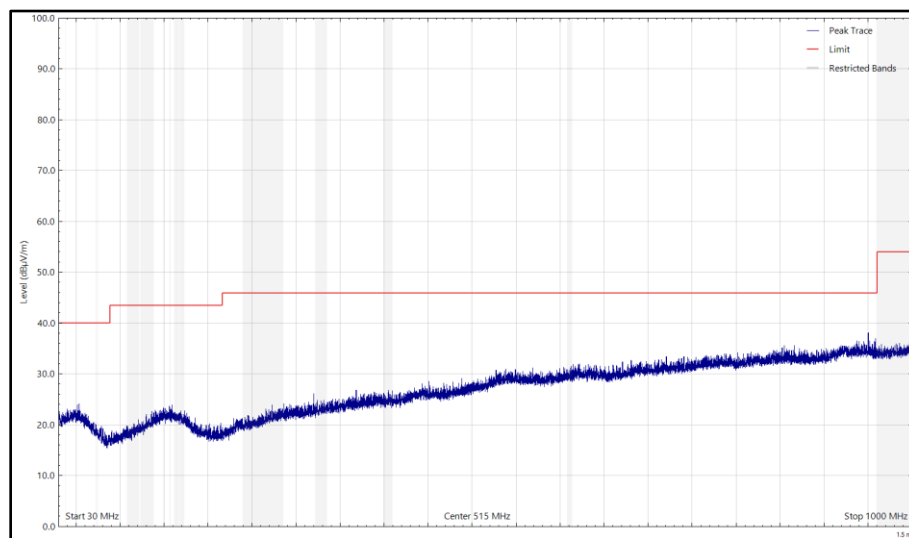


Figure 102 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

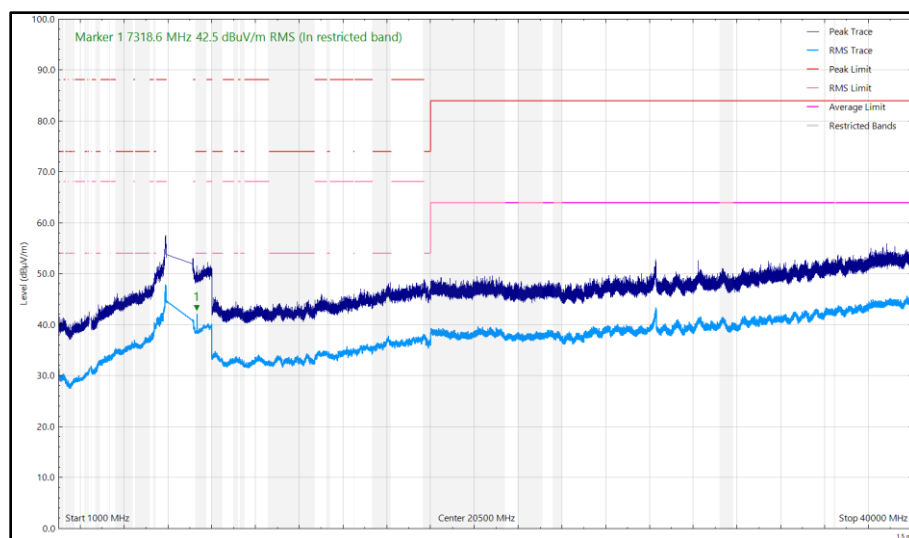


Figure 103 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Horizontal

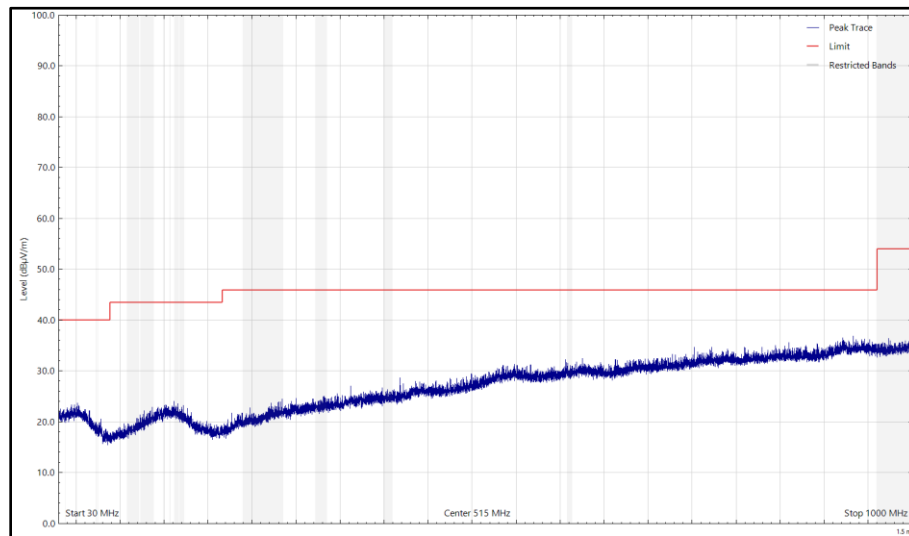


Figure 104 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

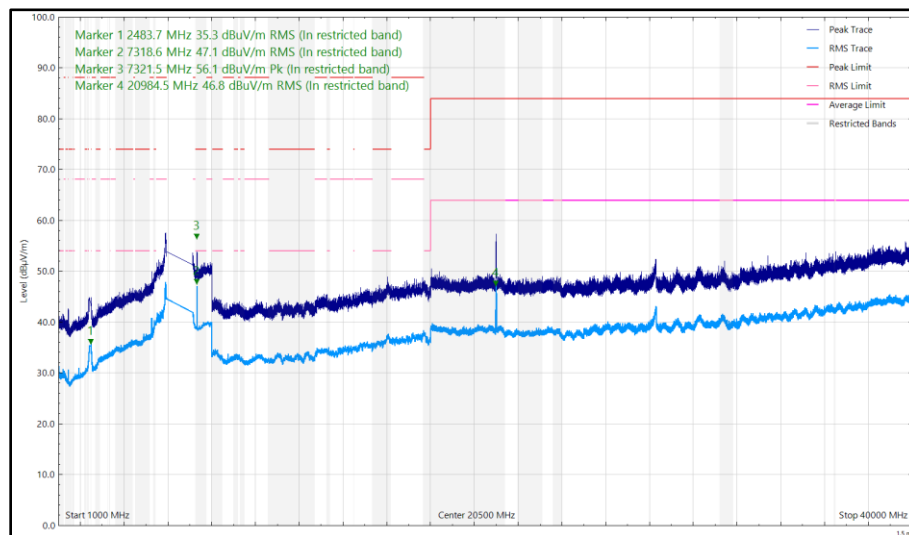


Figure 105 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 0, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
2389.996	35.72	54.00	-18.28	RMS	285	113	Vertical
20983.885	45.50	63.50	-18.00	RMS	153	100	Vertical

Table 36 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

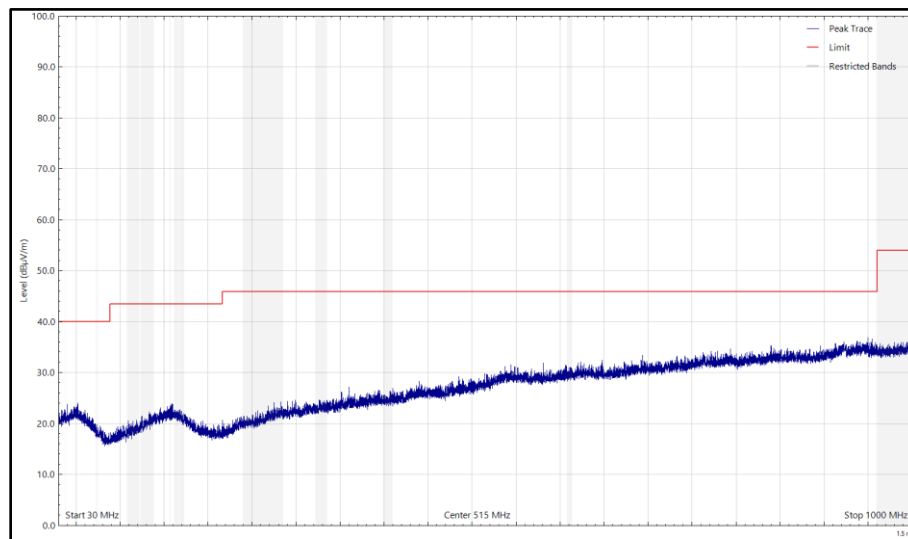


Figure 106 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

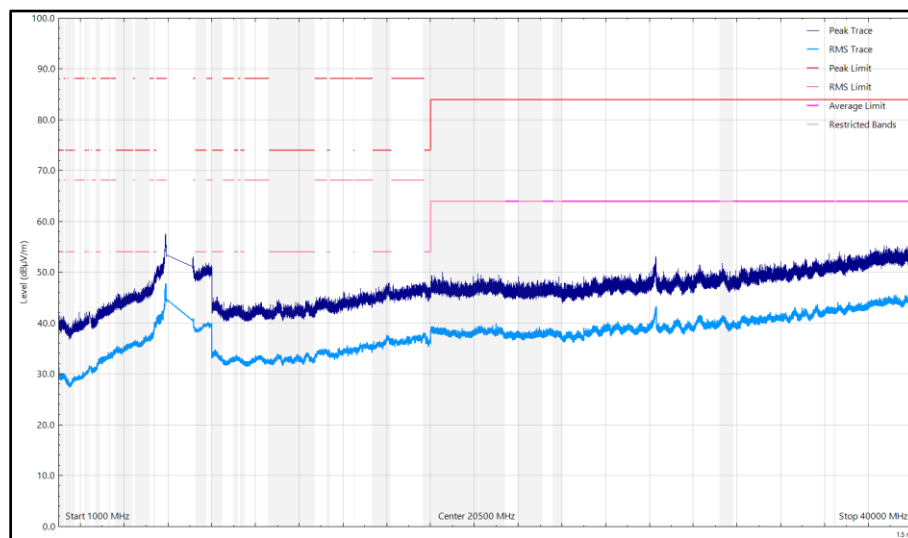


Figure 107 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Horizontal

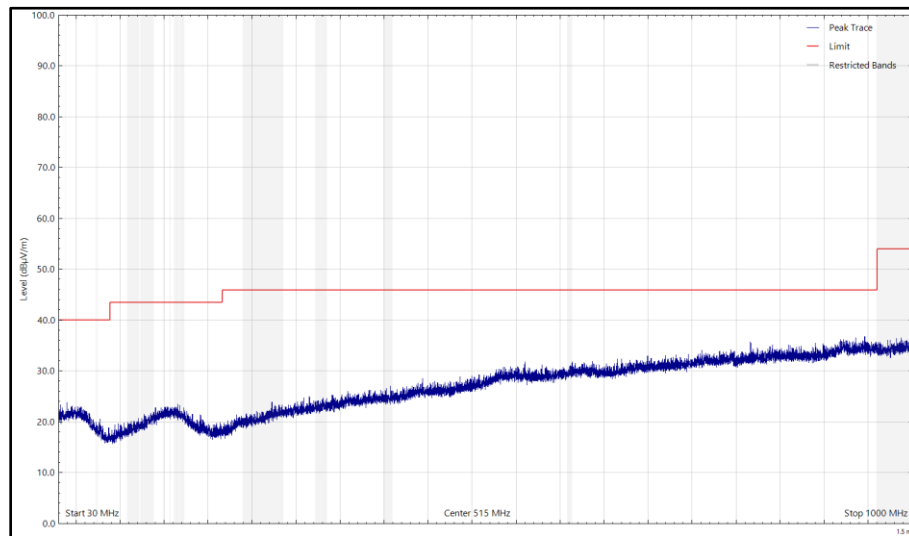


Figure 108 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

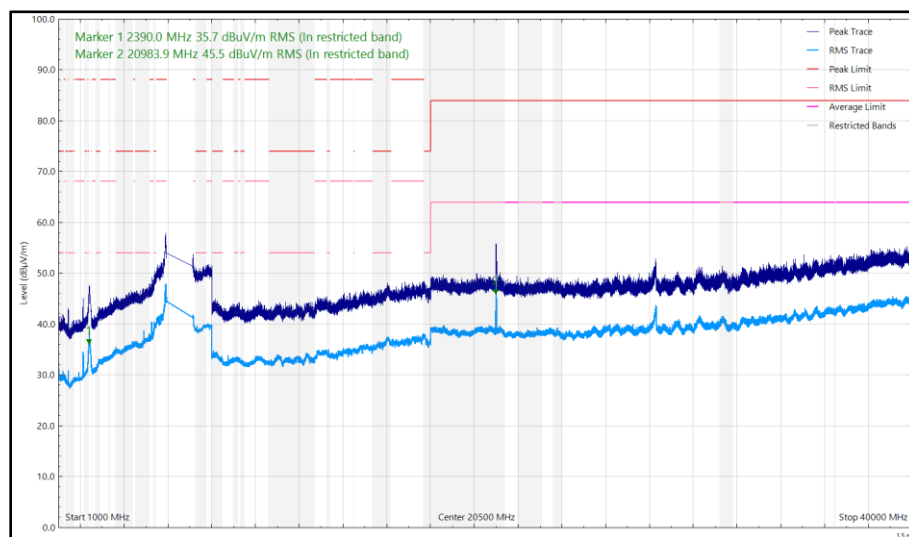


Figure 109 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), ePA, Core 1, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
4880.888	37.62	54.00	-16.38	RMS	260	126	Vertical

Table 37 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

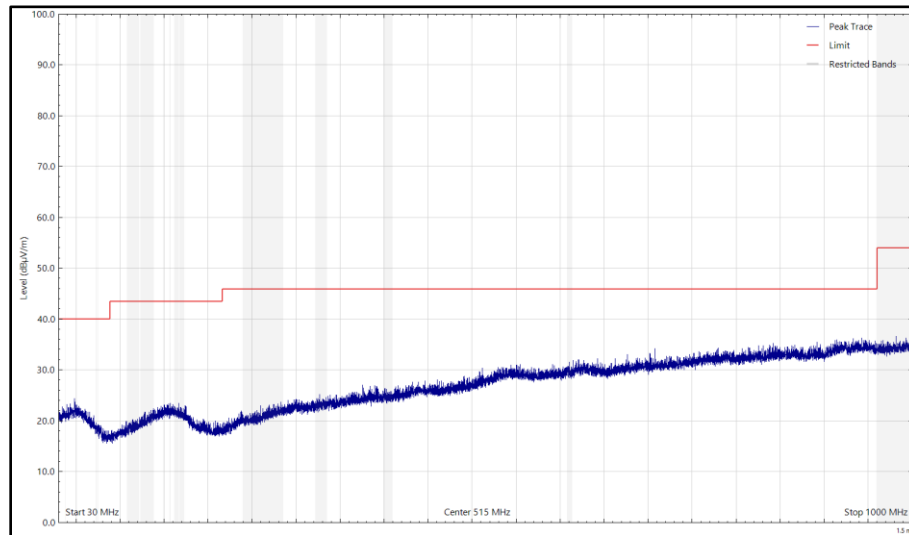


Figure 110 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

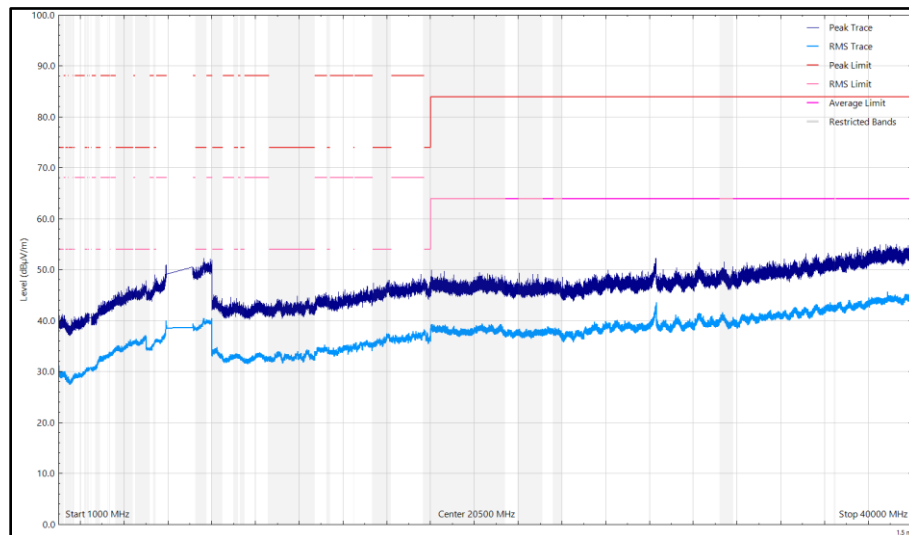


Figure 111 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Horizontal

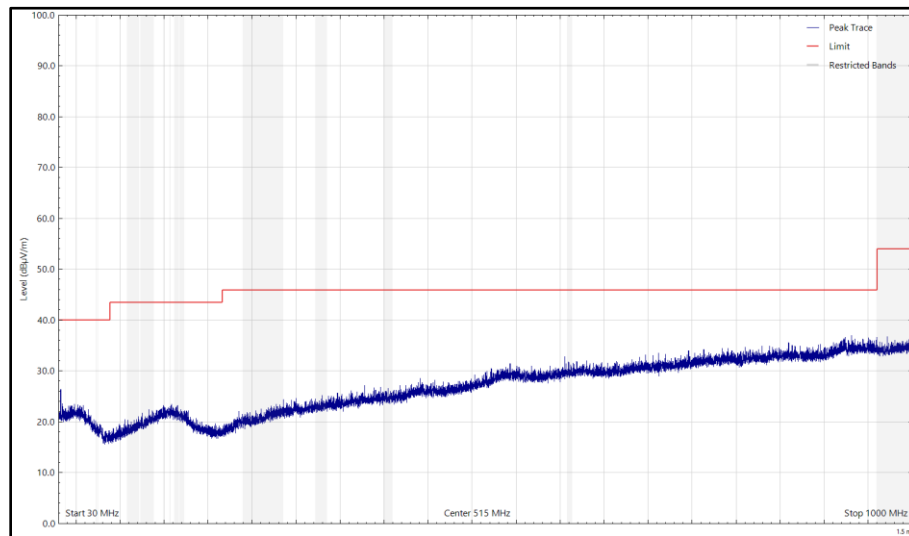


Figure 112 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

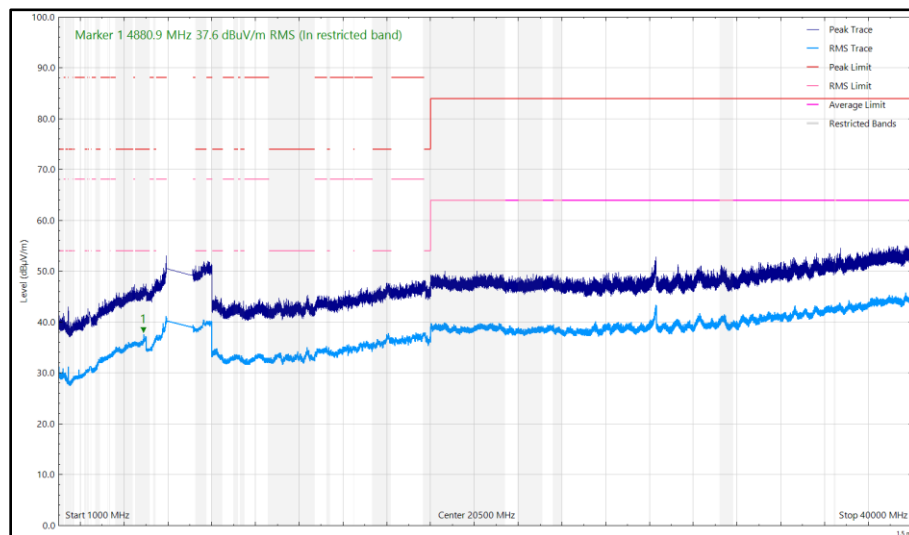


Figure 113 - U-NII-5 - 6175 MHz (CH45), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Vertical

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
20985.015	46.55	63.50	-16.95	RMS	158	100	Vertical

Table 38 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 40 GHz

No other emissions found within 10 dB of the limit.

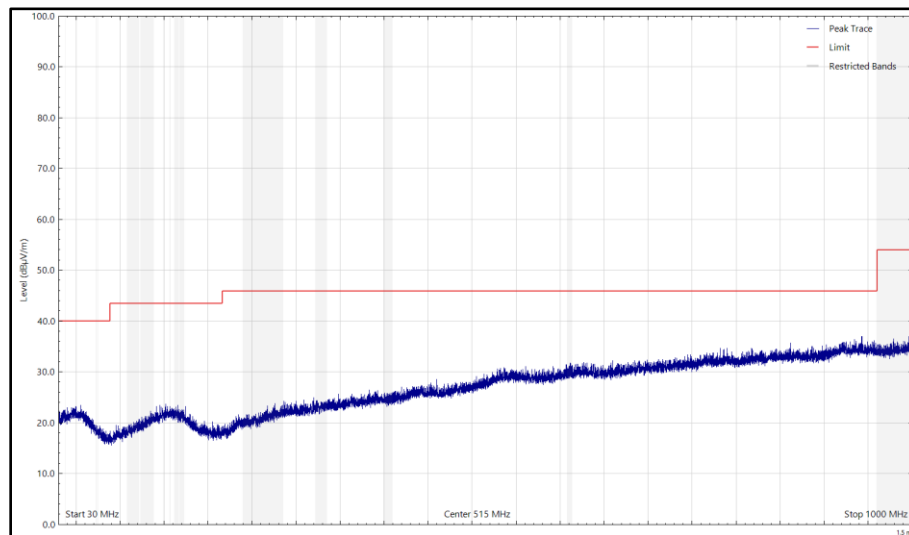


Figure 114 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Horizontal (Peak)

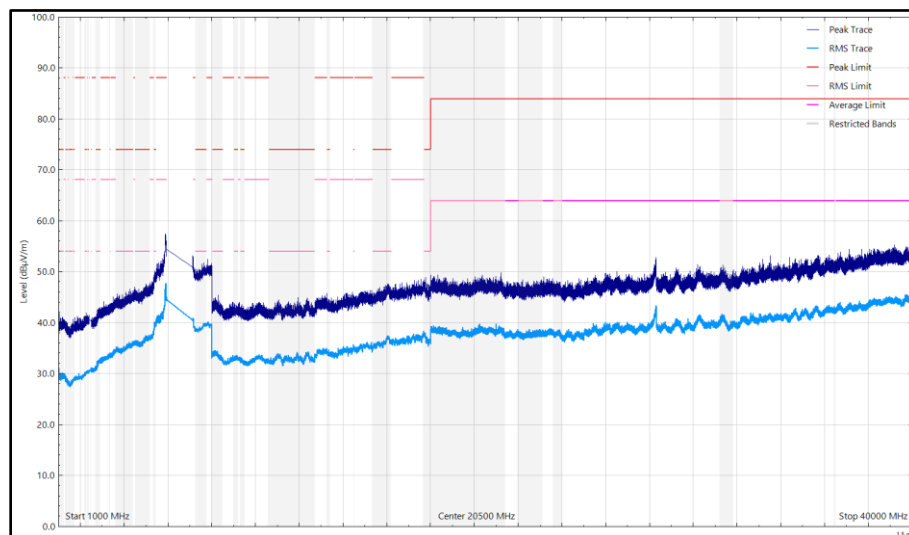


Figure 115 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Horizontal

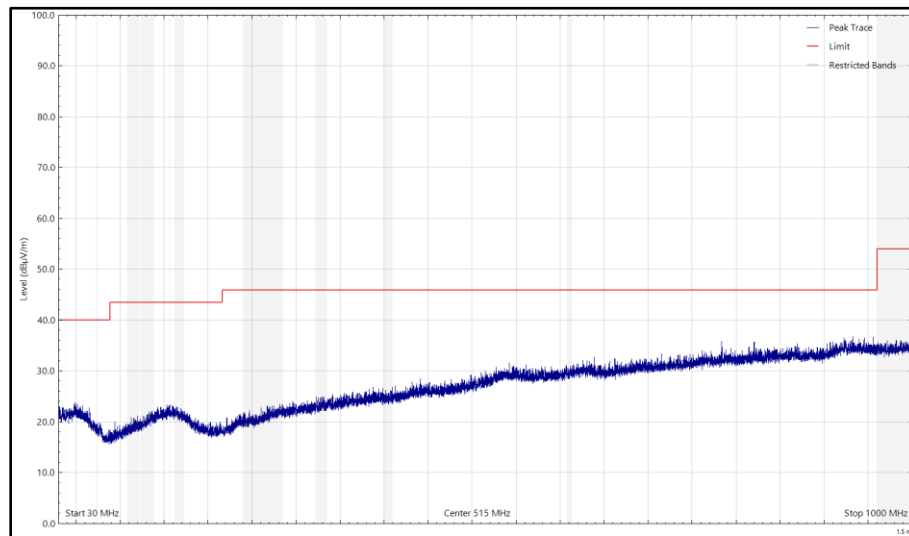


Figure 116 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 30 MHz to 1 GHz, Vertical (Peak)

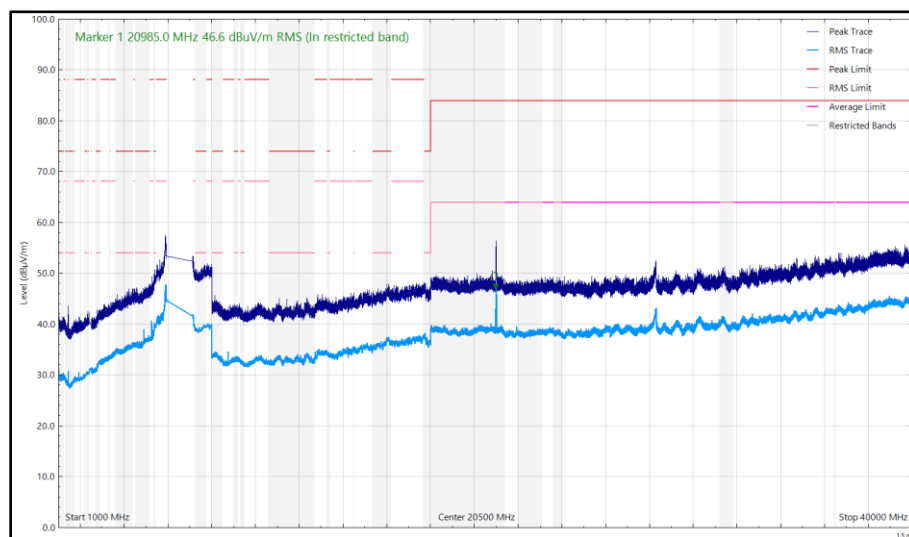


Figure 117 - U-NII-8 - 6995 MHz (CH209), HE20, SU, CDD, Core 0 + Core 1 and 2440 MHz (CH18), iPA, Core 2, 1 GHz to 40 GHz, Vertical



FCC 47 CFR Part 15, ISED RSS-247, ISED RSS-248 and ISED RSS-GEN

The least stringent limit from the applicable rule parts was used to determine compliance for Radiated Emissions testing of multiple transmission sources.

The least stringent applicable limit was:

Clause	Limit
Part 15 247 (d) / RSS-247 Clause 5.5	-20 dBc
Part 15.407 (b) / RSS-248 Clause 4.6.2	Peak: -7 dBm/MHz e.i.r.p, Average: -27 dBm/MHz e.i.r.p.
Part 15.209 / RSS-GEN Clause 8.9	Peak: 74 dBμV/m at 3m, Average 54 dBμV/m at 3m (Restricted bands > 1 GHz)

Table 39



2.1.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14, RF Chamber 15 and RF Chamber 18.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.4.2	5125	-	Software
Antenna (DRG, 1 GHz to 10.5 GHz)	Schwarzbeck	BBHA9120B	5215	12	14-Jul-2025
3.5mm Cable (1m)	Junkosha	MWX221/B	5837	12	29-Jul-2025
EMI Test Receiver	Rohde & Schwarz	ESW44	5911	12	19-Sep-2025
Test Receiver	Rohde & Schwarz	ESW44	5914	12	24-May-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	5933	12	10-Jun-2025
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5939	12	05-May-2025
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5940	12	05-May-2025
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5943	24	24-May-2026
1500W (300V 12A) AC Power Supply	iTech	IT7324	5955	-	O/P Mon
1500W (300V 12A) AC Power Supply	iTech	IT7324	5956	-	O/P Mon
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
5m Semi-Anechoic Chamber (Dual-Axis), Chamber 15	Albatross Projects	RF Chamber 15	5963	36	28-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5964	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5966	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5967	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5968	-	TU
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6007	12	20-May-2025
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6008	12	20-May-2025
Cable (N to N 1m)	Junkosha	MWX221-01000AMSAMS/B	6009	12	20-May-2025
Cable (N to N 3m)	Junkosha	MWX221-03000NMSNMS/A	6025	12	20-May-2025
Horn Antenna (1-10.5 GHz)	Schwarzbeck	BBHA9120B	6140	12	05-May-2025
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	05-May-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
SAC Switch Unit	TUV SUD	TUV_SSU_001	6144	12	11-Dec-2024
Digital Multimeter	Fluke	115	6146	12	06-Jun-2025
Digital Multimeter	Fluke	115	6147	12	06-Jun-2025
Humidity & Temperature meter	R.S Components	1364	6148	12	29-Jul-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6188	24	31-Jul-2026
SAC Switch Unit	TUV SUD	TUV_SSU_001	6190	12	22-Dec-2024
SAC Switch Unit	TUV SUD	TUV_SSU_001	6191	12	18-Dec-2024
8GHz Highpass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6195	12	23-Apr-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6198	12	03-Jun-2025
Attenuator 4dB	Pasternack	PE7074-4	6201	24	24-May-2026
Attenuator 4dB	Pasternack	PE7074-4	6204	24	20-Jun-2026
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6214	12	23-Apr-2025
USB Spectrum Analyser	Signal Hound	SA124B	6295	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6296	-	TU
USB Spectrum Analyser	Signal Hound	SA124B	6297	-	TU
Cable (SMA to SMA 8m)	Junkosha	MWX221-08000AMSAMS/B	6318	12	18-Feb-2025
Cable (K Type 2m)	Junkosha	MWX241-02000KMSKMS/B	6323	12	04-Feb-2025
Digital Multimeter	Fluke	115	6345	12	24-Jul-2025
8 GHz High Pass Filter	Wainwright	WHKX 7150 8000 18000 50SS	6427	12	23-Apr-2025
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	6456	24	10-Feb-2025
3m Semi-Anechoic Chamber	Albatross Projects	Chamber 18	6597	36	07-Feb-2026
Coax cable sma to sma with N-Type adapter	TUV SUD	N/A	6637	12	23-Apr-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6740	12	01-Feb-2025
1m Cable	Junkosha	MWX241-01000AMSAMS/B	6741	12	01-Feb-2025
6.5m Cable	Junkosha	MWX221-06500AMSAMS/B	6744	12	01-Feb-2025
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6771	24	17-Jan-2025
Pre Amp 8 - 18 GHz	Wright Technologies	APS06-0061	6783	12	23-Apr-2025
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	6795	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	6796	-	TU
Turntable	Maturo Gmbh	TT1.5SI	6797	-	TU
EMI Test Receiver	Rohde & Schwarz	ESW44	6805	12	29-May-2025



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
AC Programmable Power Supply	iTech	IT7324	6812	-	O/P Mon
Broad-Band Horn Antenna 1-10GHz N	Schwarzbeck	BBHA9120B	6825	12	18-Jul-2025
1M SMA Cable	Junkosha	MWX221-01000AMSAMS/B	6832	12	14-Aug-2025
8M SMA Cable	Junkosha	MWX221-08000AMSAMS/B	6834	12	14-Aug-2025
Handheld Hygrometer	Fluke	971	6837	12	27-Aug-2025
8m SMA-Type Cable	Junkosha	MWX221-08000AMSAMS/B	6851	12	05-Sep-2025
Cable Assembly	SpecTech	PE300-60	6856	-	TU
Cable Assembly	SpecTech	PE300-60	6861	-	TU
Cable Assembly	SpecTech	PE300-60	6862	-	TU
Cable Assembly	SpecTech	PE300-60	6863	-	TU
Cable Assembly	SpecTech	PE300-60	6866	-	TU
Cable Assembly	SpecTech	PE300-60	6867	-	TU
Cable Assembly	SpecTech	PE300-60	6868	-	TU

Table 40

TU - Traceability Unscheduled
O/P Mon - Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Radiated Spurious Emissions (Simultaneous Transmission)	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB

Table 41

Measurement Uncertainty Decision Rule – Accuracy Method

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2021, Clause 4.4.3 (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.