



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

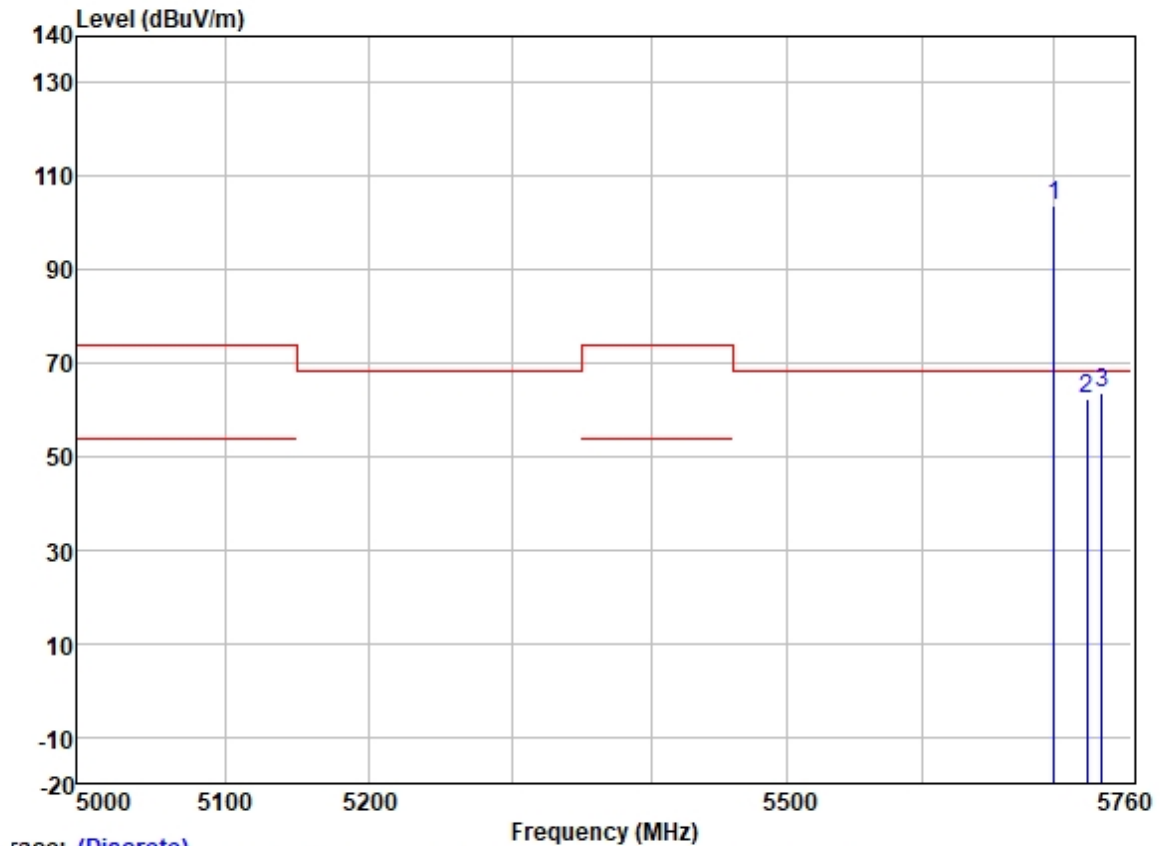

Trace: (Discrete)

| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 * | 5700.000 | 102.35 | 32.01 | 6.40 | 36.89 | 103.87 | 68.20 | 35.67 | HORIZONTAL Peak |
| 2 | 5725.000 | 60.87 | 32.07 | 6.25 | 36.89 | 62.30 | 68.20 | -5.90 | HORIZONTAL Peak |
| 3 | 5736.686 | 62.39 | 32.07 | 6.25 | 36.89 | 63.82 | 68.20 | -4.38 | HORIZONTAL Peak |


Test Mode: 03; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

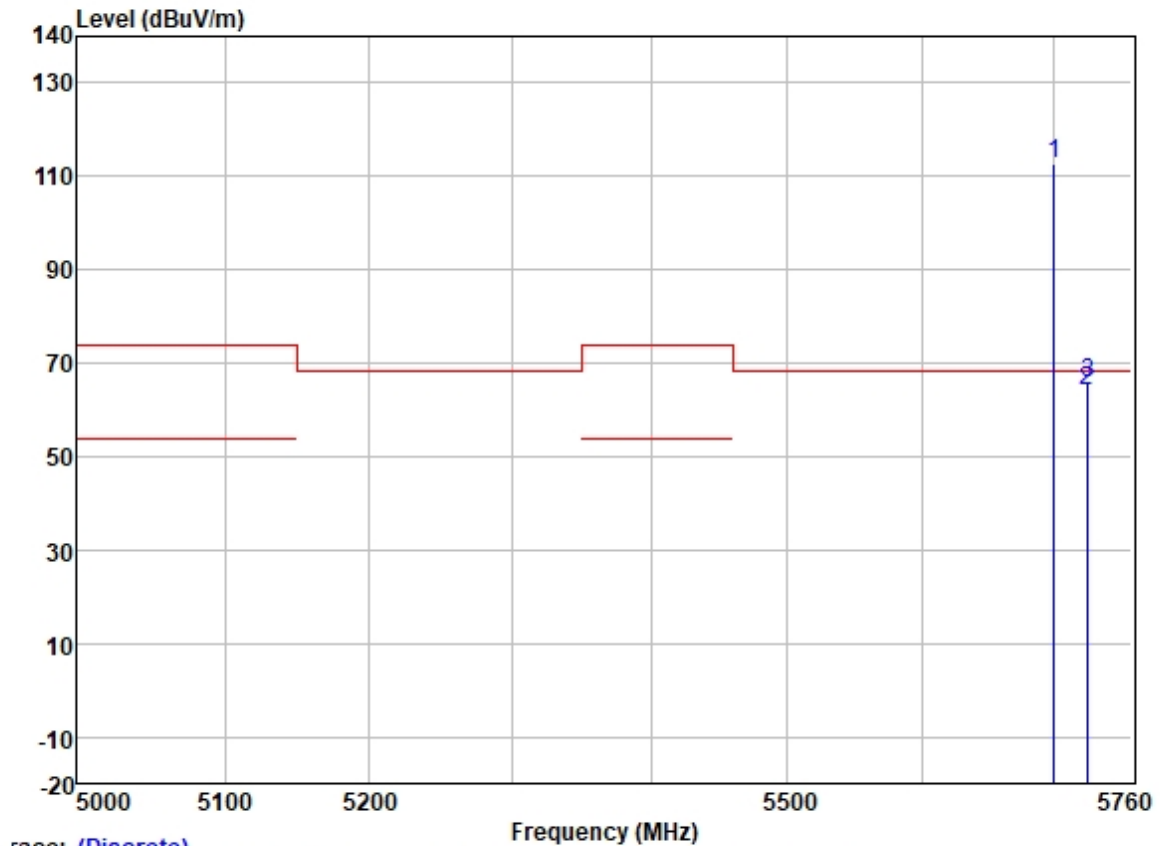

Trace: (Discrete)

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|------------|-------------|--------|-------|--------|--------|--------|-------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | * 5700.000 | 111.01 | 32.01 | 6.40 | 36.89 | 112.53 | 68.20 | 44.33 | VERTICAL | Peak |
| 2 | 5725.000 | 62.61 | 32.07 | 6.25 | 36.89 | 64.04 | 68.20 | -4.16 | VERTICAL | Peak |
| 3 | 5726.183 | 64.24 | 32.07 | 6.25 | 36.89 | 65.67 | 68.20 | -2.53 | VERTICAL | Peak |


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

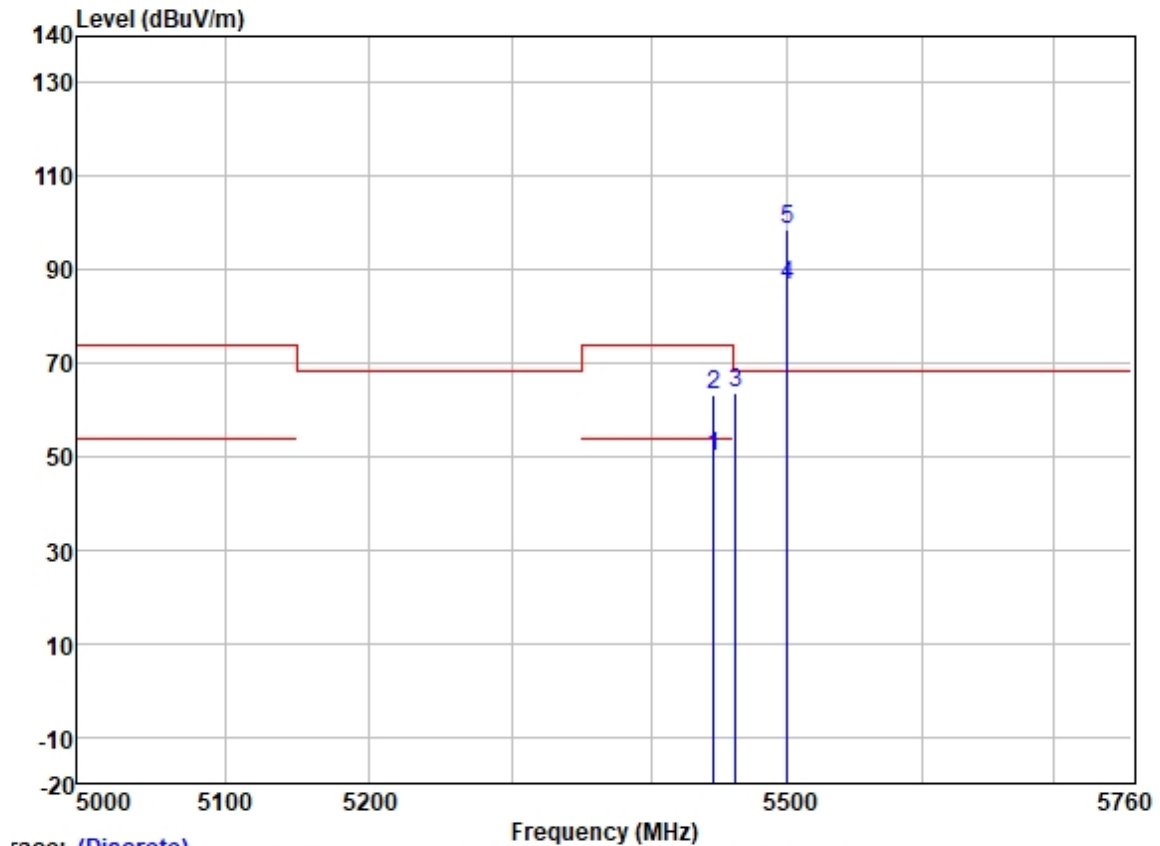

Trace: (Discrete)


| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark |
|-----|----------|------------|----------------|------------|---------------|-------------|------------|-----------|--------------------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dB | | |
| 1 | 5445.529 | 48.67 | 31.79 | 6.20 | 36.88 | 49.78 | 54.00 | -4.22 | HORIZONTAL Average |
| 2 | 5445.529 | 61.92 | 31.79 | 6.20 | 36.88 | 63.03 | 74.00 | -10.97 | HORIZONTAL Peak |
| 3 | 5461.351 | 62.27 | 31.79 | 6.26 | 36.88 | 63.44 | 68.20 | -4.76 | HORIZONTAL Peak |
| 4 | 5500.000 | 85.54 | 31.80 | 6.40 | 36.88 | 86.86 | ----- | ----- | HORIZONTAL Average |
| 5 * | 5500.000 | 97.48 | 31.80 | 6.40 | 36.88 | 98.80 | 68.20 | 30.60 | HORIZONTAL Peak |

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

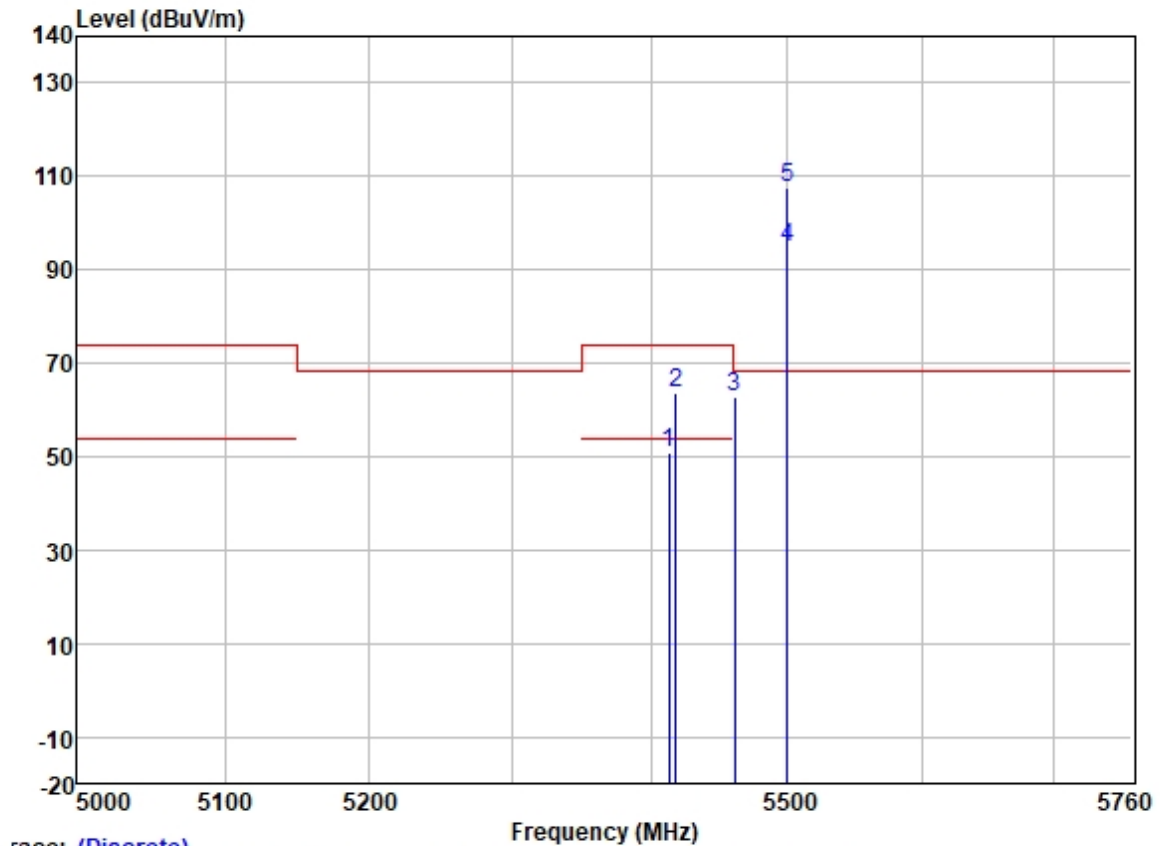

| race: (Discrete) | Frequency (MHz) | | | | | | | | | |
|------------------|-----------------|--------|---------|-------|--------|--------|--------|--------|-----------|---------|
| | | Read | Antenna | Cable | Preamp | | Limit | Over | Pol/Phase | Remark |
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | | |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5413.309 | 49.66 | 31.79 | 6.06 | 36.88 | 50.63 | 54.00 | -3.37 | VERTICAL | Average |
| 2 | 5418.070 | 62.43 | 31.79 | 6.13 | 36.88 | 63.47 | 74.00 | -10.53 | VERTICAL | Peak |
| 3 | 5460.630 | 61.78 | 31.79 | 6.26 | 36.88 | 62.95 | 68.20 | -5.25 | VERTICAL | Peak |
| 4 | 5500.000 | 93.63 | 31.80 | 6.40 | 36.88 | 94.95 | ----- | ----- | VERTICAL | Average |
| 5 * | 5500.000 | 106.16 | 31.80 | 6.40 | 36.88 | 107.48 | 68.20 | 39.28 | VERTICAL | Peak |


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

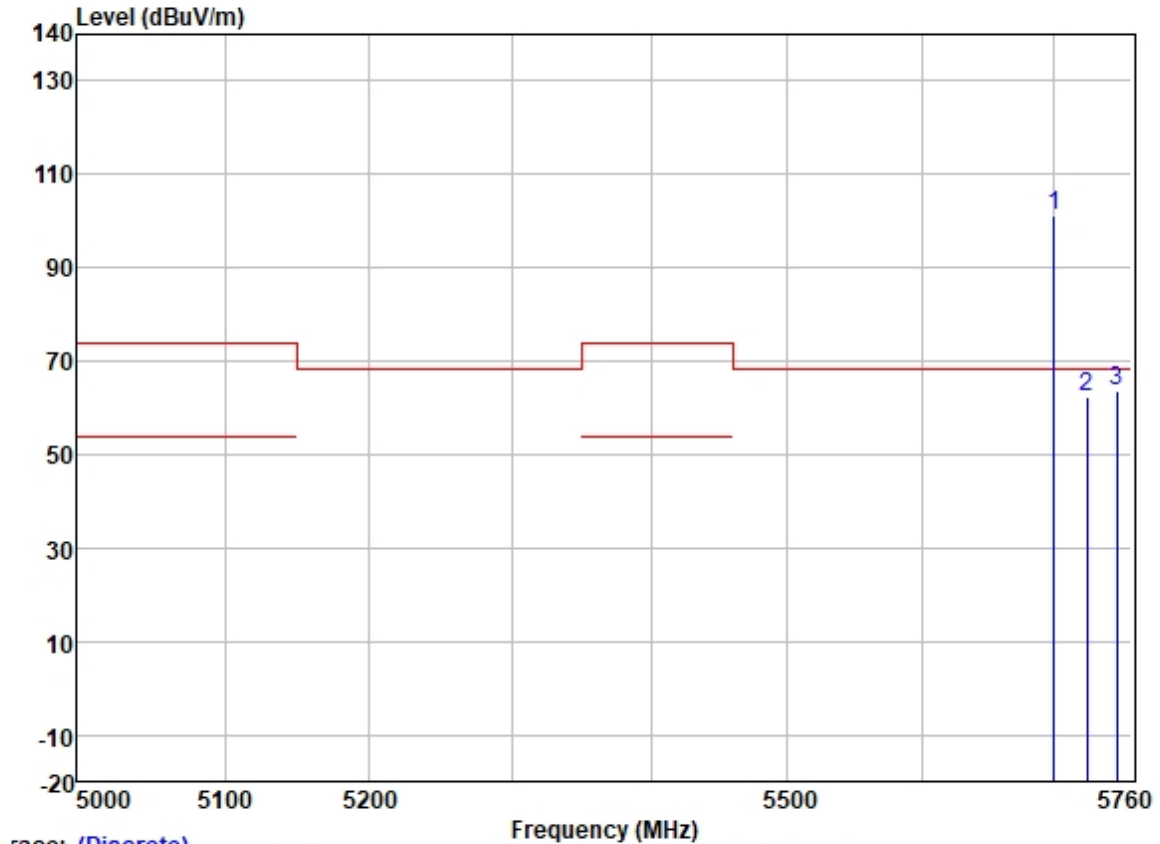

Trace: (Discrete)


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 * | 5700.000 | 99.86 | 32.01 | 6.40 | 36.89 | 101.38 | 68.20 | 33.18 | HORIZONTAL Peak |
| 2 | 5725.000 | 60.85 | 32.07 | 6.25 | 36.89 | 62.28 | 68.20 | -5.92 | HORIZONTAL Peak |
| 3 | 5748.312 | 62.20 | 32.10 | 6.20 | 36.89 | 63.61 | 68.20 | -4.59 | HORIZONTAL Peak |

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

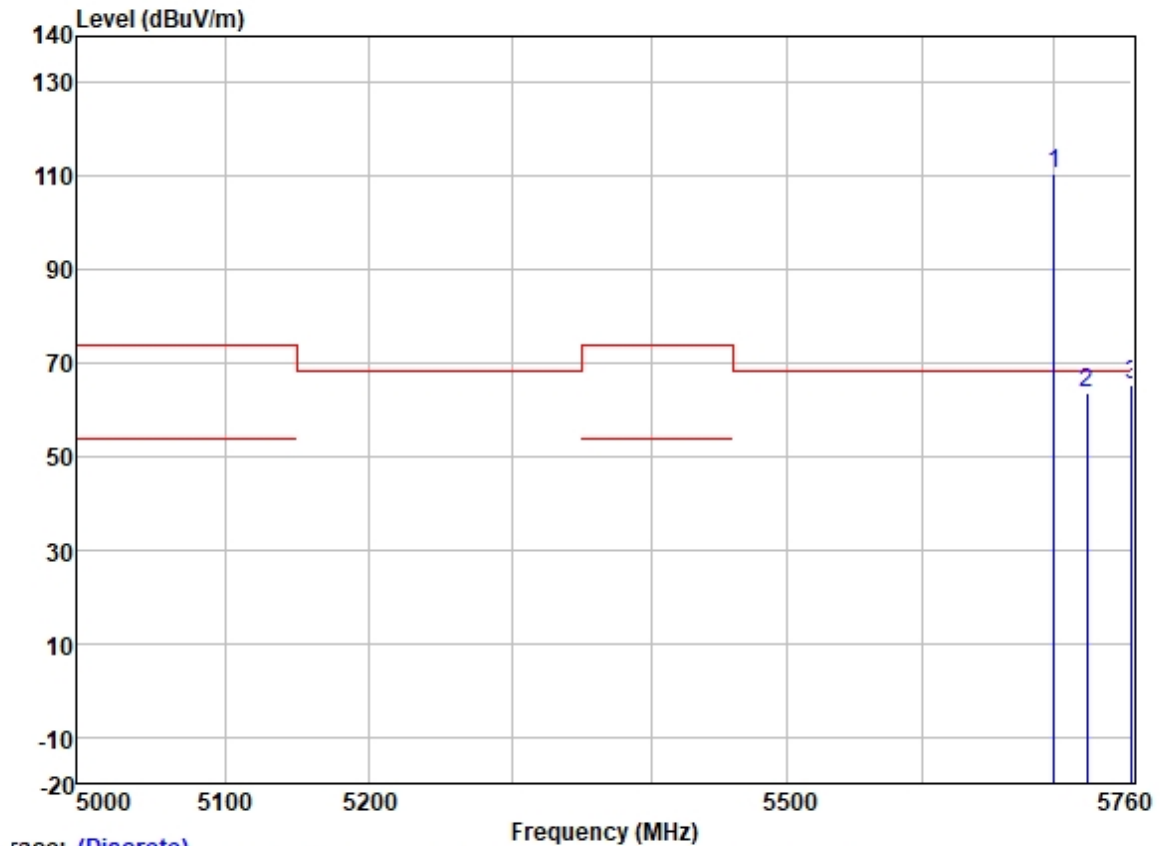


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 * | 5700.000 | 108.96 | 32.01 | 6.40 | 36.89 | 110.48 | 68.20 | 42.28 | VERTICAL Peak |
| 2 | 5725.000 | 62.36 | 32.07 | 6.25 | 36.89 | 63.79 | 68.20 | -4.41 | VERTICAL Peak |
| 3 | 5759.559 | 64.15 | 32.13 | 6.15 | 36.89 | 65.54 | 68.20 | -2.66 | VERTICAL Peak |

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

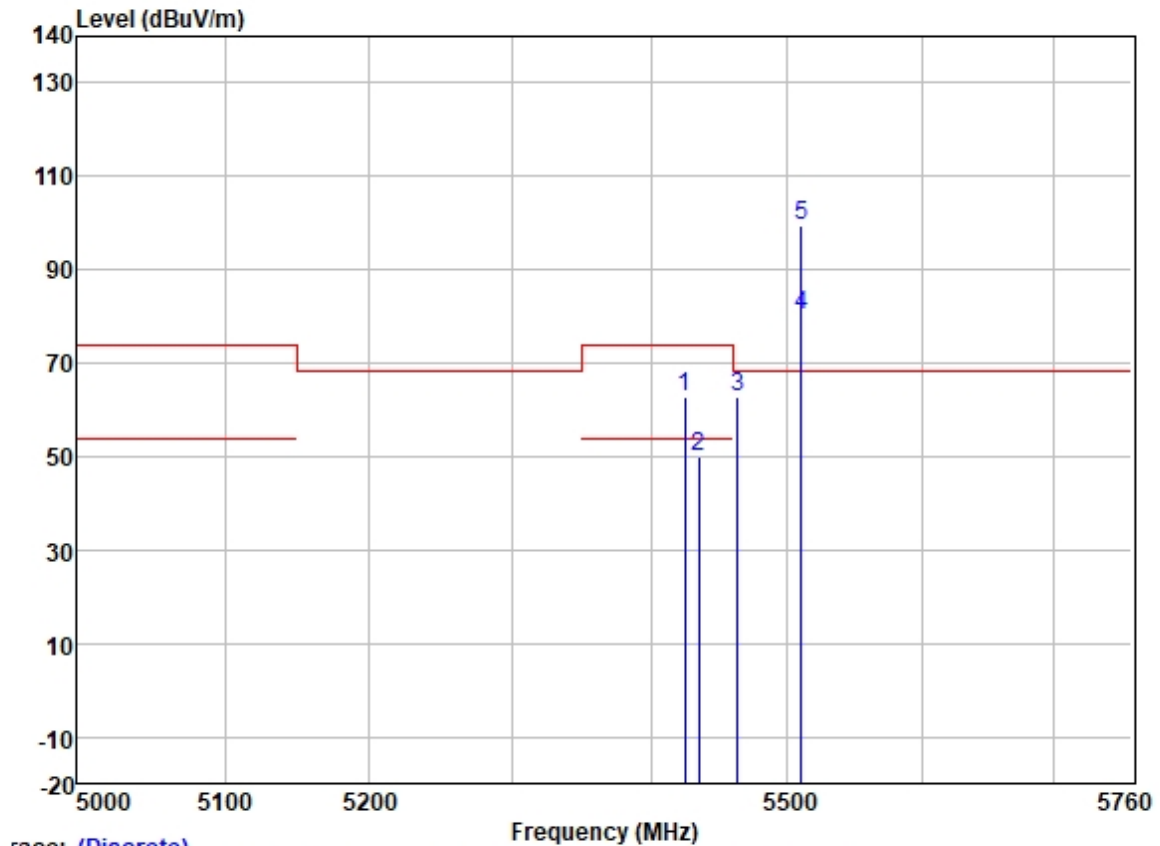

| race: (Discrete) | Frequency (MHz) | | | | | | | | |
|------------------|-----------------|-------------|--------|--------|--------|--------|--------|-----------|--------------------|
| | Freq | ReadAntenna | Cable | Preamp | | Limit | Over | Pol/Phase | Remark |
| | | Level | Factor | Loss | Factor | Level | Line | | |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 5424.797 | 61.70 | 31.79 | 6.13 | 36.88 | 62.74 | 74.00 | -11.26 | HORIZONTAL Peak |
| 2 | 5434.665 | 48.68 | 31.79 | 6.20 | 36.88 | 49.79 | 54.00 | -4.21 | HORIZONTAL Average |
| 3 | 5463.396 | 61.47 | 31.79 | 6.26 | 36.88 | 62.64 | 68.20 | -5.56 | HORIZONTAL Peak |
| 4 | 5510.000 | 79.01 | 31.80 | 6.40 | 36.88 | 80.33 | ----- | ----- | HORIZONTAL Average |
| 5 * | 5510.000 | 97.98 | 31.80 | 6.40 | 36.88 | 99.30 | 68.20 | 31.10 | HORIZONTAL Peak |


Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

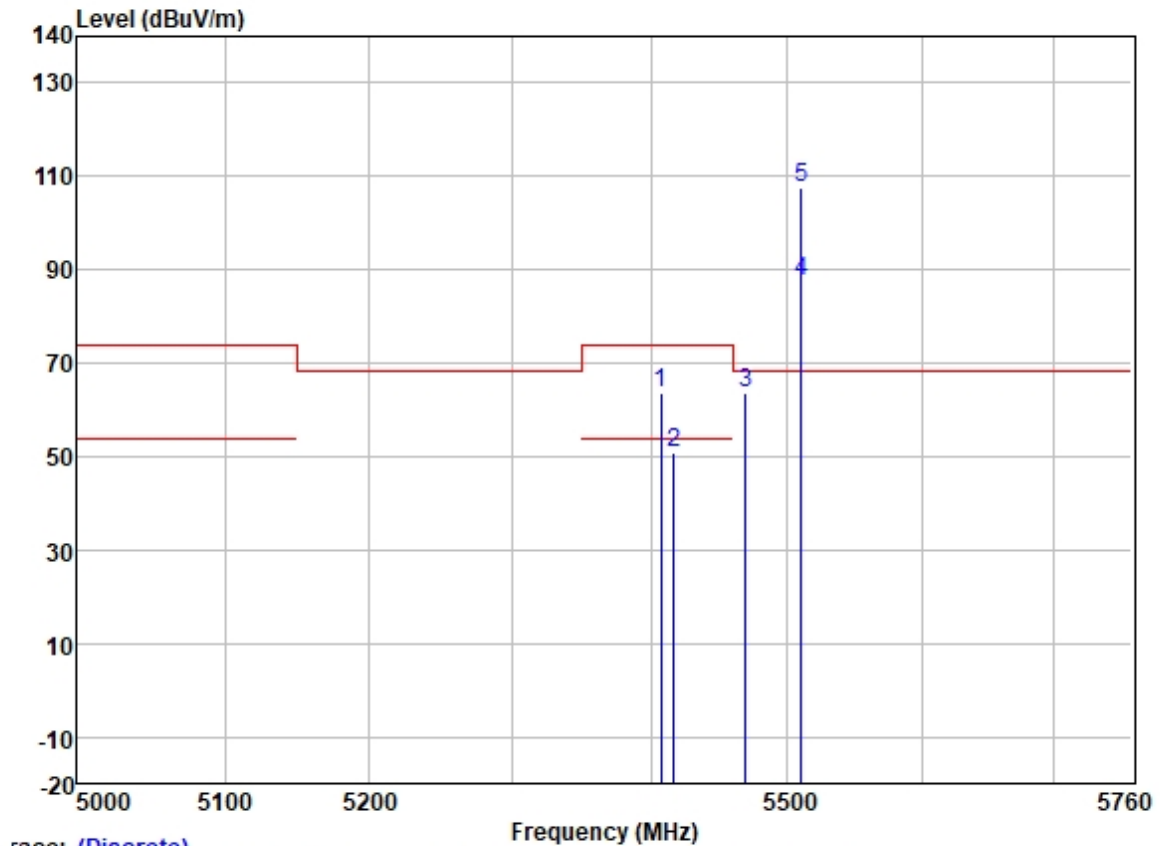

Trace: (Discrete)

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark |
|-----|----------|------------|----------------|------------|---------------|-------------|------------|-----------|------------------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dB | | |
| 1 | 5407.054 | 62.70 | 31.79 | 6.06 | 36.88 | 63.67 | 74.00 | -10.33 | VERTICAL Peak |
| 2 | 5416.750 | 49.97 | 31.79 | 6.13 | 36.88 | 51.01 | 54.00 | -2.99 | VERTICAL Average |
| 3 | 5468.852 | 62.30 | 31.80 | 6.31 | 36.88 | 63.53 | 68.20 | -4.67 | VERTICAL Peak |
| 4 | 5510.000 | 86.14 | 31.80 | 6.40 | 36.88 | 87.46 | ----- | ----- | VERTICAL Average |
| 5 * | 5510.000 | 106.06 | 31.80 | 6.40 | 36.88 | 107.38 | 68.20 | 39.18 | VERTICAL Peak |


Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

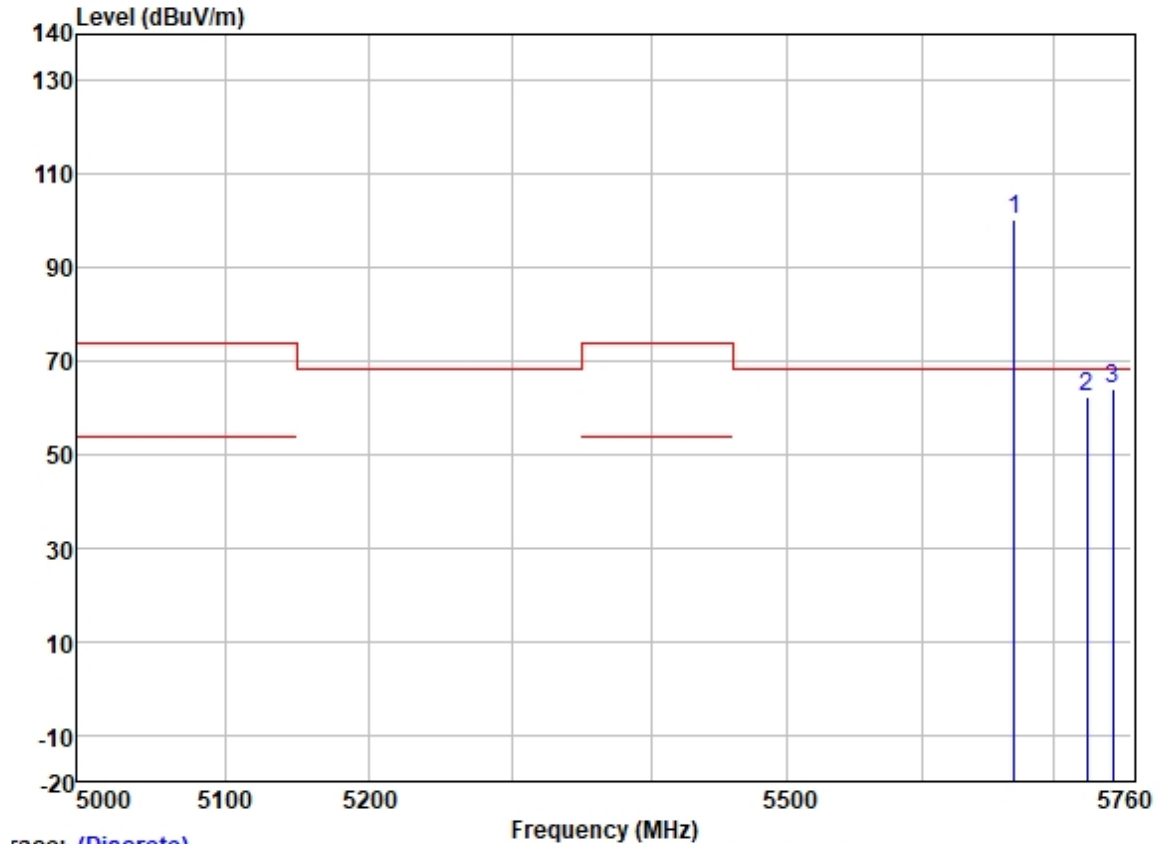

Trace: (Discrete)


| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark |
|-----|----------|------------|----------------|------------|---------------|-------------|------------|-----------|-----------------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dB | | |
| 1 * | 5670.000 | 98.98 | 31.97 | 6.37 | 36.89 | 100.43 | 68.20 | 32.23 | HORIZONTAL Peak |
| 2 | 5725.000 | 60.76 | 32.07 | 6.25 | 36.89 | 62.19 | 68.20 | -6.01 | HORIZONTAL Peak |
| 3 | 5745.100 | 62.67 | 32.10 | 6.20 | 36.89 | 64.08 | 68.20 | -4.12 | HORIZONTAL Peak |

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

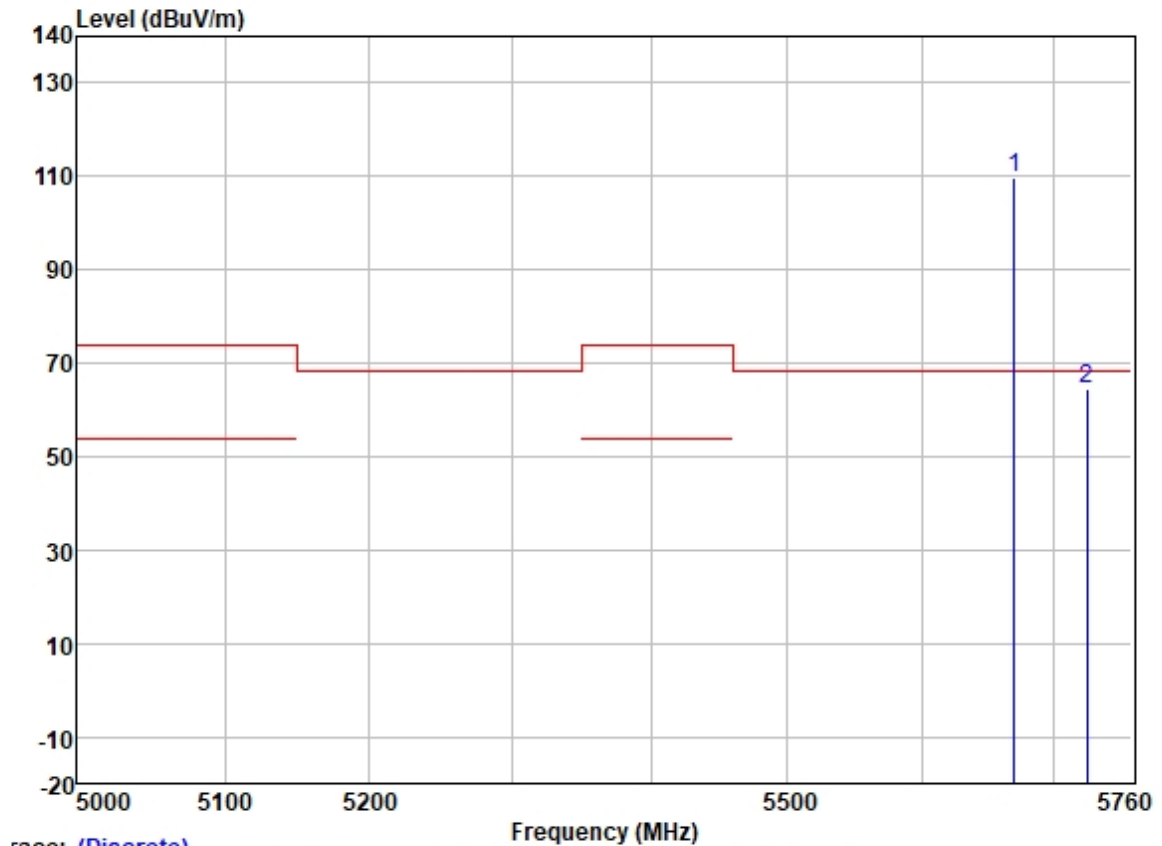

| | Freq | ReadAntenna Level | Factor | Cable Loss | Preamp Factor | Level | Limit Line | Over Limit | Pol/Phase | Remark |
|-----|----------|----------------------|--------|---------------|------------------|--------|---------------|---------------|-----------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 * | 5670.000 | 108.40 | 31.97 | 6.37 | 36.89 | 109.85 | 68.20 | 41.65 | VERTICAL | Peak |
| 2 | 5725.000 | 63.10 | 32.07 | 6.25 | 36.89 | 64.53 | 68.20 | -3.67 | VERTICAL | Peak |


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

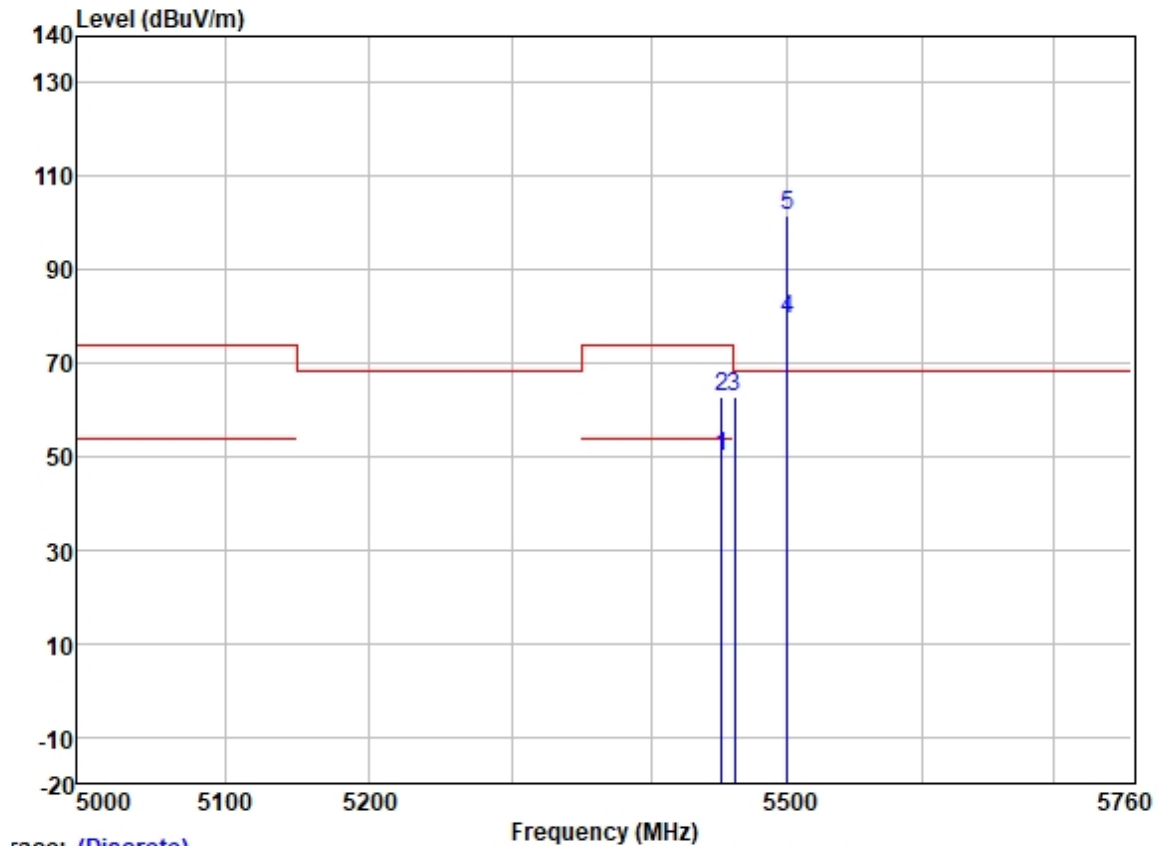

race: (Discrete)


| | | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|-----|----------|--------|---------|-------|--------|--------|--------|--------|------------|---------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5451.756 | 48.60 | 31.79 | 6.26 | 36.88 | 49.77 | 54.00 | -4.23 | HORIZONTAL | Average |
| 2 | 5451.756 | 61.75 | 31.79 | 6.26 | 36.88 | 62.92 | 74.00 | -11.08 | HORIZONTAL | Peak |
| 3 | 5461.110 | 61.68 | 31.79 | 6.26 | 36.88 | 62.85 | 68.20 | -5.35 | HORIZONTAL | Peak |
| 4 | 5500.000 | 78.10 | 31.80 | 6.40 | 36.88 | 79.42 | ----- | ----- | HORIZONTAL | Average |
| 5 * | 5500.000 | 100.32 | 31.80 | 6.40 | 36.88 | 101.64 | 68.20 | 33.44 | HORIZONTAL | Peak |

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: Low

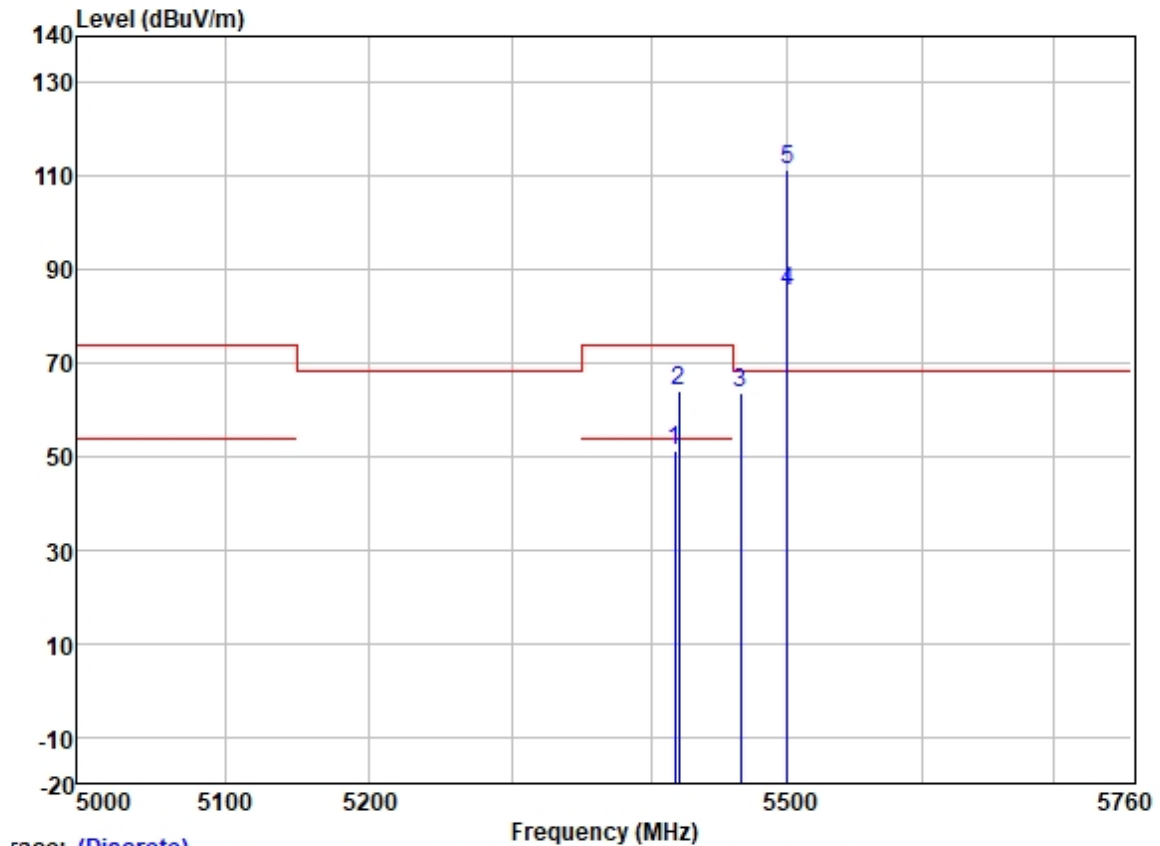

| race: (Discrete) | Frequency (MHz) | | | | | | | | | |
|------------------|-----------------|-------------|--------|--------|--------|--------|--------|-----------|----------|---------|
| | Freq | ReadAntenna | Cable | Preamp | | Limit | Over | Pol/Phase | Remark | |
| | | Level | Factor | Loss | Factor | Level | Line | | | Limit |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5417.237 | 50.03 | 31.79 | 6.13 | 36.88 | 51.07 | 54.00 | -2.93 | VERTICAL | Average |
| 2 | 5419.857 | 62.85 | 31.79 | 6.13 | 36.88 | 63.89 | 74.00 | -10.11 | VERTICAL | Peak |
| 3 | 5464.953 | 62.27 | 31.80 | 6.31 | 36.88 | 63.50 | 68.20 | -4.70 | VERTICAL | Peak |
| 4 | 5500.000 | 84.28 | 31.80 | 6.40 | 36.88 | 85.60 | ----- | ----- | VERTICAL | Average |
| 5 * | 5500.000 | 110.07 | 31.80 | 6.40 | 36.88 | 111.39 | 68.20 | 43.19 | VERTICAL | Peak |


Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: High

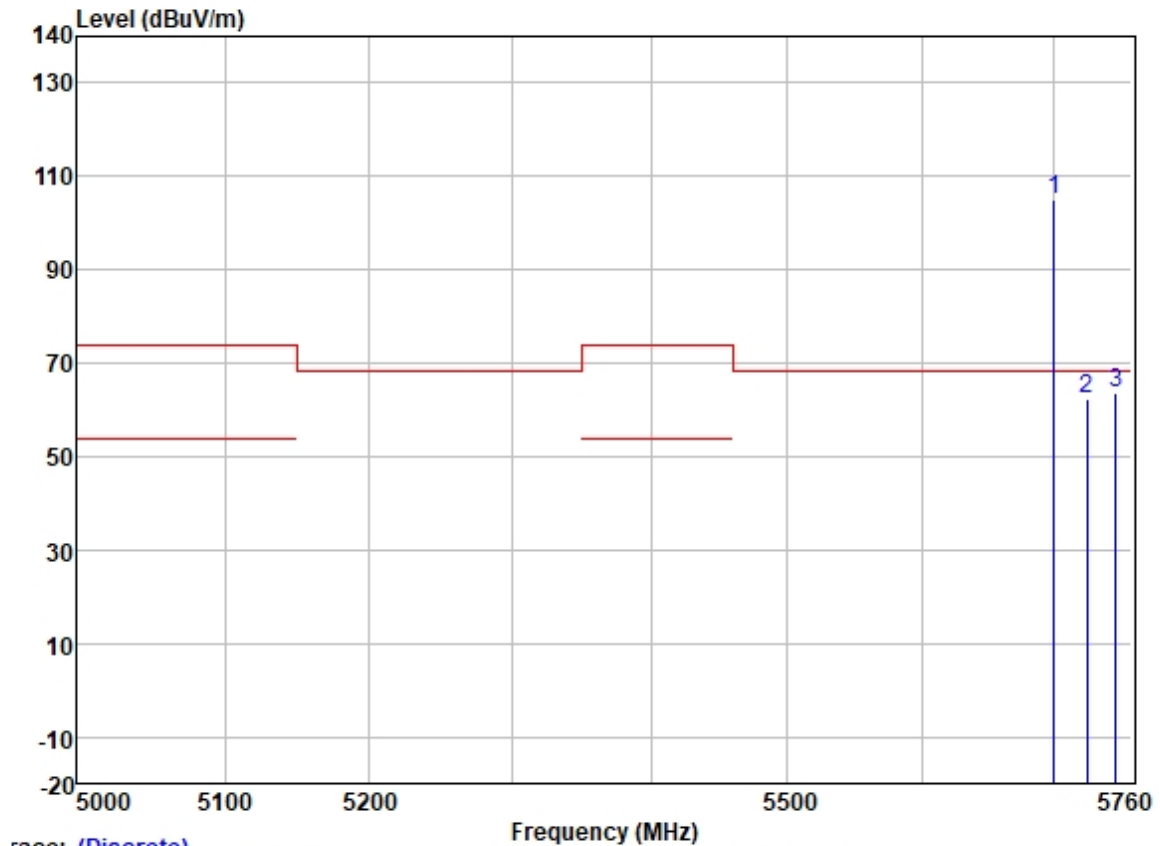

Trace: (Discrete)


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|------------|-------------|--------|-------|--------|--------|--------|-------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | * 5700.000 | 103.50 | 32.01 | 6.40 | 36.89 | 105.02 | 68.20 | 36.82 | HORIZONTAL | Peak |
| 2 | 5725.000 | 60.99 | 32.07 | 6.25 | 36.89 | 62.42 | 68.20 | -5.78 | HORIZONTAL | Peak |
| 3 | 5747.609 | 62.12 | 32.10 | 6.20 | 36.89 | 63.53 | 68.20 | -4.67 | HORIZONTAL | Peak |

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: High

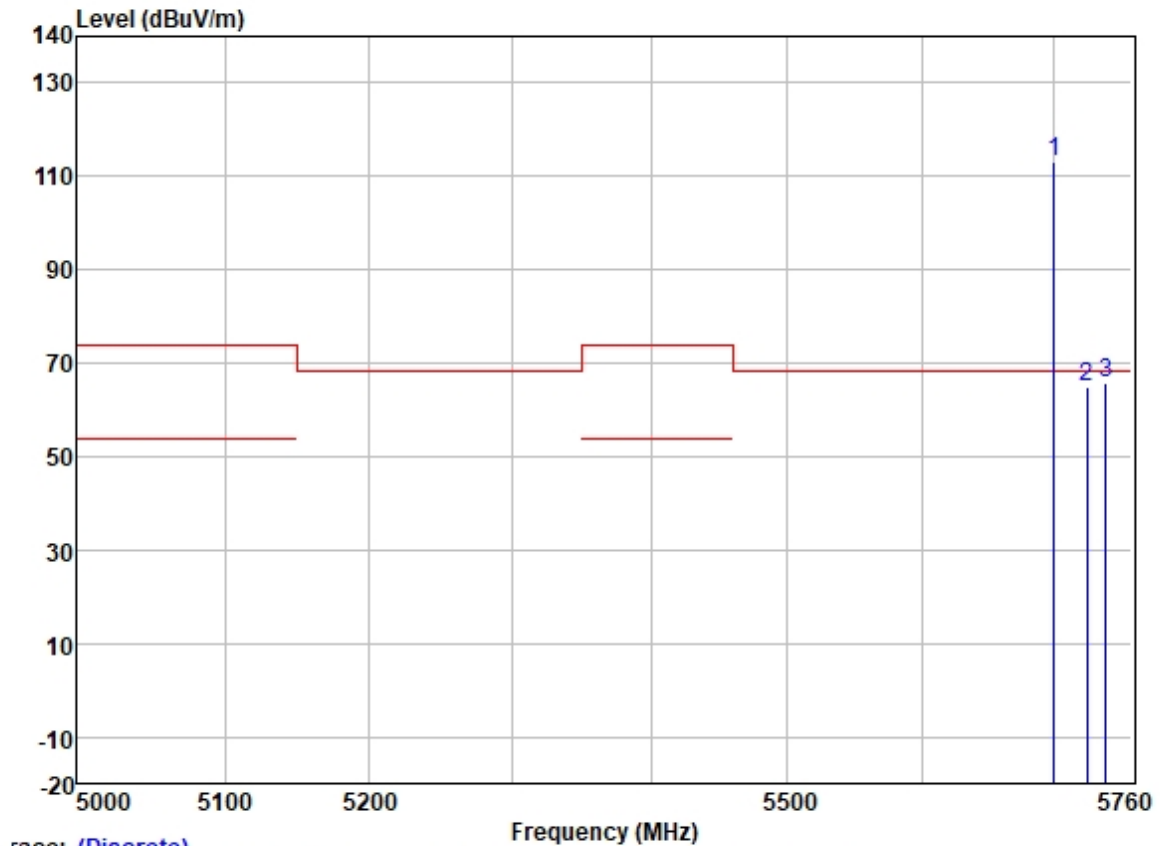


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 * | 5700.000 | 111.41 | 32.01 | 6.40 | 36.89 | 112.93 | 68.20 | 44.73 | VERTICAL Peak |
| 2 | 5725.000 | 63.68 | 32.07 | 6.25 | 36.89 | 65.11 | 68.20 | -3.09 | VERTICAL Peak |
| 3 | 5739.690 | 64.43 | 32.10 | 6.20 | 36.89 | 65.84 | 68.20 | -2.36 | VERTICAL Peak |

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: Low

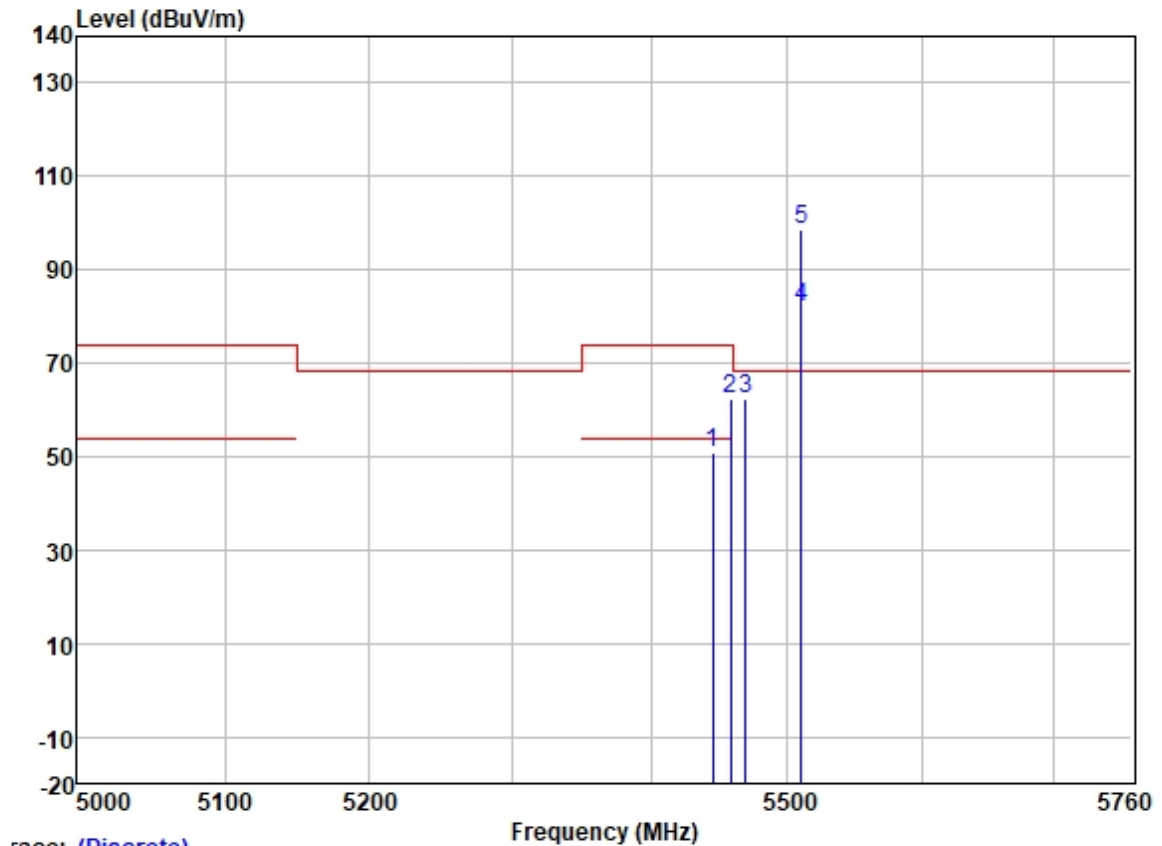


| race: (Discrete) | Frequency (MHz) | | | | | | | | |
|------------------|-----------------|-------------|--------|--------|--------|--------|--------|-----------|--------------------|
| | Freq | ReadAntenna | Cable | Preamp | | Limit | Over | Pol/Phase | Remark |
| | | Level | Factor | Loss | Factor | Level | Line | | |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 5444.968 | 49.81 | 31.79 | 6.20 | 36.88 | 50.92 | 54.00 | -3.08 | HORIZONTAL Average |
| 2 | 5457.666 | 61.16 | 31.79 | 6.26 | 36.88 | 62.33 | 74.00 | -11.67 | HORIZONTAL Peak |
| 3 | 5468.572 | 61.25 | 31.80 | 6.31 | 36.88 | 62.48 | 68.20 | -5.72 | HORIZONTAL Peak |
| 4 | 5510.000 | 80.51 | 31.80 | 6.40 | 36.88 | 81.83 | ----- | ----- | HORIZONTAL Average |
| 5 * | 5510.000 | 97.33 | 31.80 | 6.40 | 36.88 | 98.65 | 68.20 | 30.45 | HORIZONTAL Peak |

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: Low

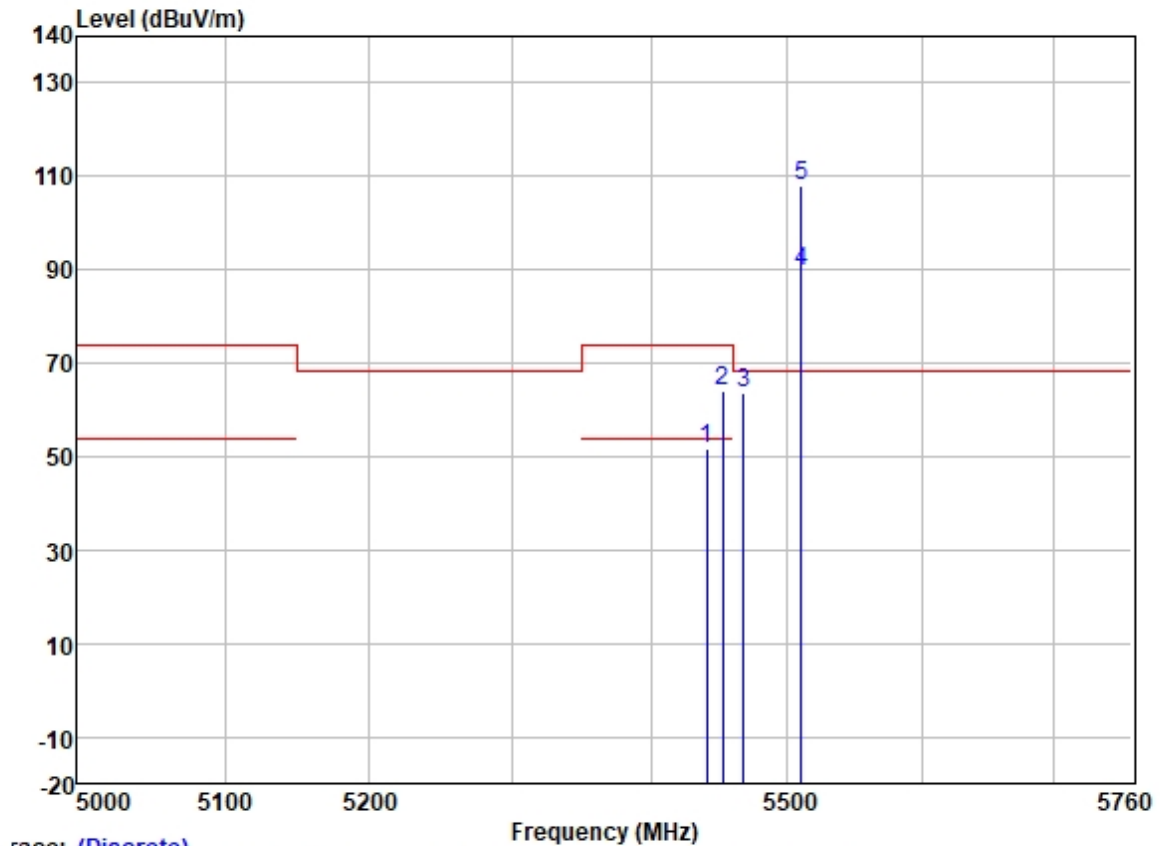

| race: (Discrete) | Frequency (MHz) | | | | | | | | | |
|------------------|-----------------|-------------|--------|--------|--------|--------|--------|-----------|----------|---------|
| | Freq | ReadAntenna | Cable | Preamp | | Limit | Over | Pol/Phase | Remark | |
| | | Level | Factor | Loss | Factor | Level | Line | | | Limit |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5440.510 | 50.63 | 31.79 | 6.20 | 36.88 | 51.74 | 54.00 | -2.26 | VERTICAL | Average |
| 2 | 5452.081 | 62.71 | 31.79 | 6.26 | 36.88 | 63.88 | 74.00 | -10.12 | VERTICAL | Peak |
| 3 | 5467.313 | 62.38 | 31.80 | 6.31 | 36.88 | 63.61 | 68.20 | -4.59 | VERTICAL | Peak |
| 4 | 5510.000 | 88.30 | 31.80 | 6.40 | 36.88 | 89.62 | ----- | ----- | VERTICAL | Average |
| 5 * | 5510.000 | 106.52 | 31.80 | 6.40 | 36.88 | 107.84 | 68.20 | 39.64 | VERTICAL | Peak |


Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

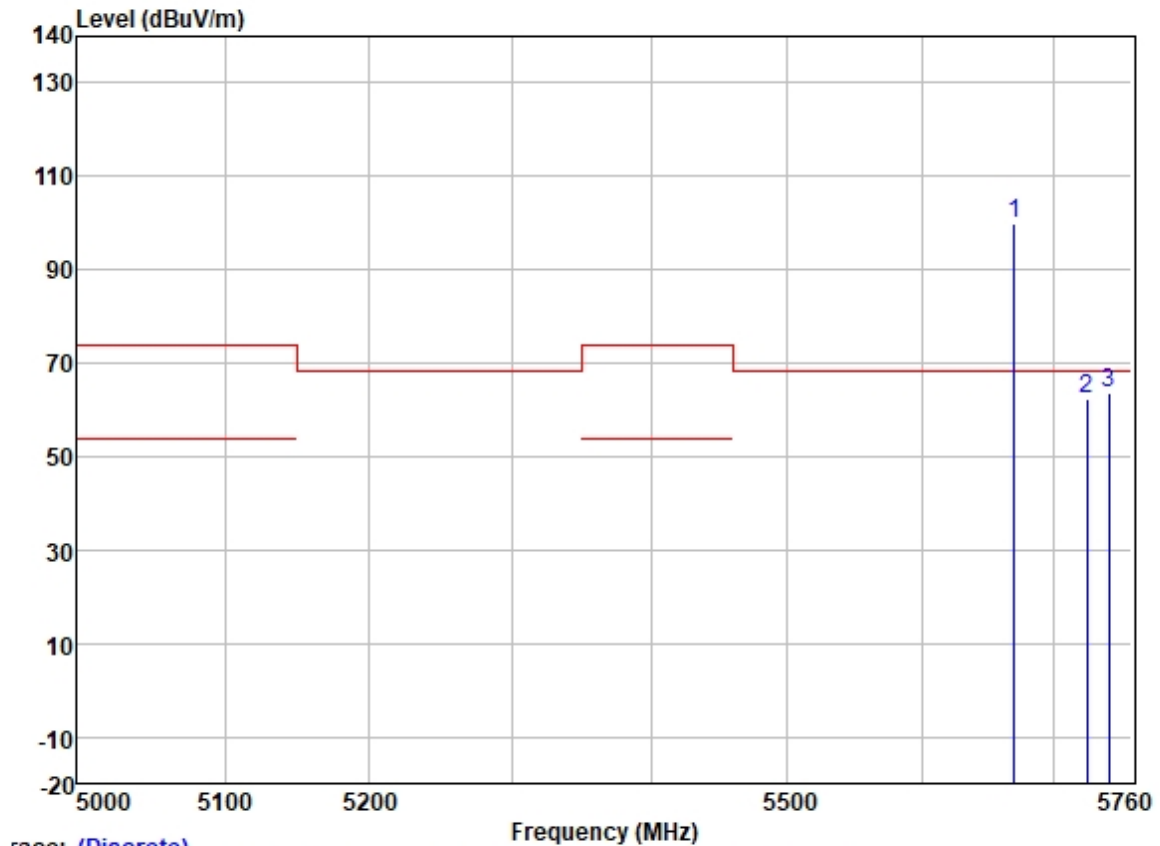

Trace: (Discrete)


| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|-----------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 * | 5670.000 | 98.51 | 31.97 | 6.37 | 36.89 | 99.96 | 68.20 | 31.76 | HORIZONTAL Peak |
| 2 | 5725.000 | 60.90 | 32.07 | 6.25 | 36.89 | 62.33 | 68.20 | -5.87 | HORIZONTAL Peak |
| 3 | 5742.002 | 62.38 | 32.10 | 6.20 | 36.89 | 63.79 | 68.20 | -4.41 | HORIZONTAL Peak |

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

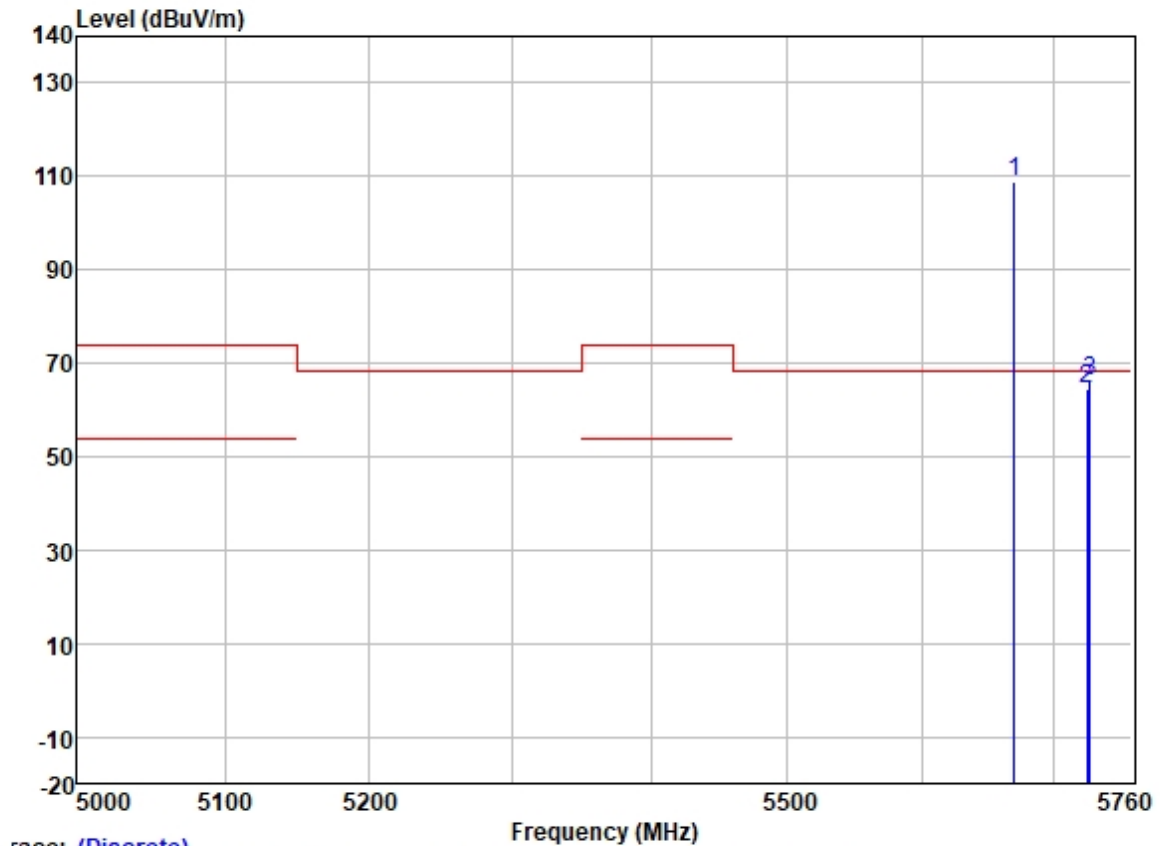

| | Read | Antenna | Cable | Preamp | | Limit | Over | | |
|------|----------|---------|-------|--------|--------|--------|-------|-----------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 * | 5670.000 | 107.23 | 31.97 | 6.37 | 36.89 | 108.68 | 68.20 | 40.48 | VERTICAL Peak |
| 2 | 5725.000 | 62.96 | 32.07 | 6.25 | 36.89 | 64.39 | 68.20 | -3.81 | VERTICAL Peak |
| 3 | 5727.659 | 64.73 | 32.07 | 6.25 | 36.89 | 66.16 | 68.20 | -2.04 | VERTICAL Peak |


Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

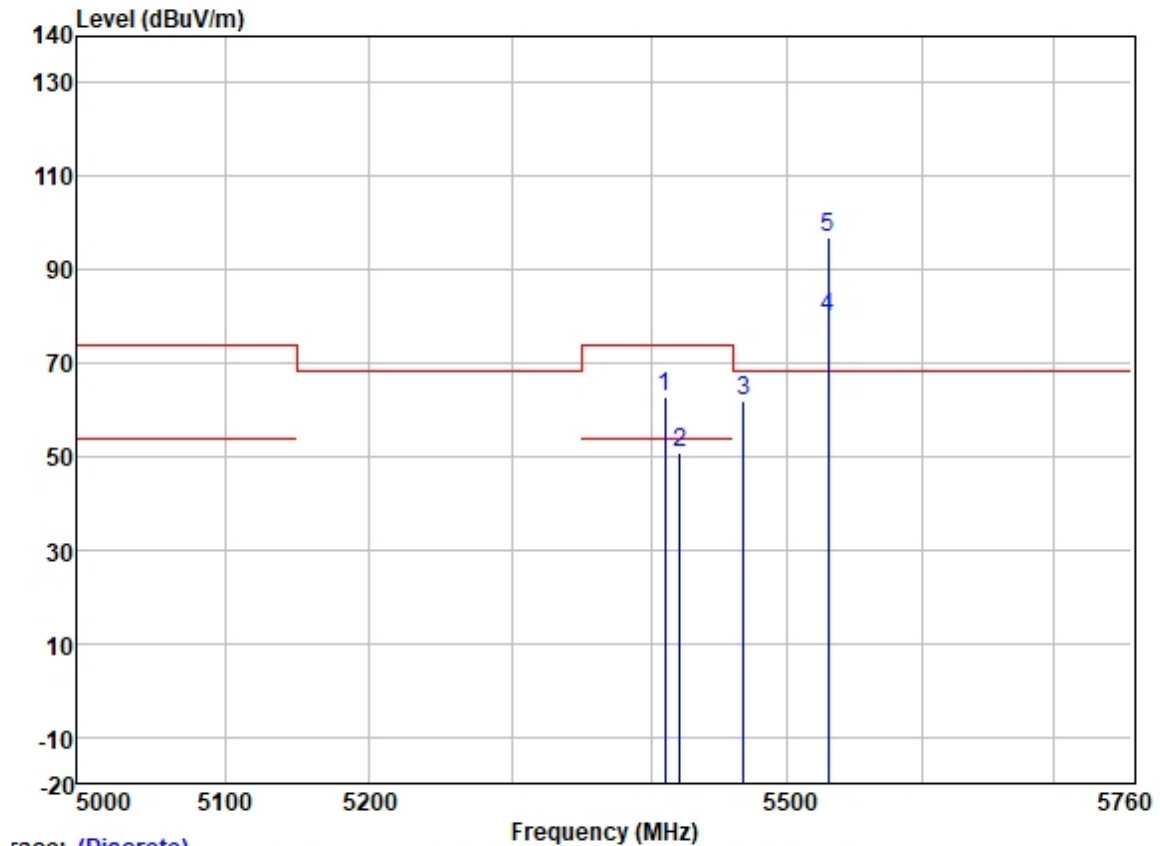

Trace: (Discrete)

| | Freq | ReadAntenna | Cable | Preamp | | Limit | Over | | | |
|-----|----------|-------------|--------|--------|--------|--------|--------|--------|------------|---------|
| | | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5409.748 | 61.75 | 31.79 | 6.06 | 36.88 | 62.72 | 74.00 | -11.28 | HORIZONTAL | Peak |
| 2 | 5421.290 | 49.67 | 31.79 | 6.13 | 36.88 | 50.71 | 54.00 | -3.29 | HORIZONTAL | Average |
| 3 | 5467.347 | 60.81 | 31.80 | 6.31 | 36.88 | 62.04 | 68.20 | -6.16 | HORIZONTAL | Peak |
| 4 | 5530.000 | 78.59 | 31.83 | 6.37 | 36.89 | 79.90 | ----- | ----- | HORIZONTAL | Average |
| 5 * | 5530.000 | 95.54 | 31.83 | 6.37 | 36.89 | 96.85 | 68.20 | 28.65 | HORIZONTAL | Peak |


Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: Low

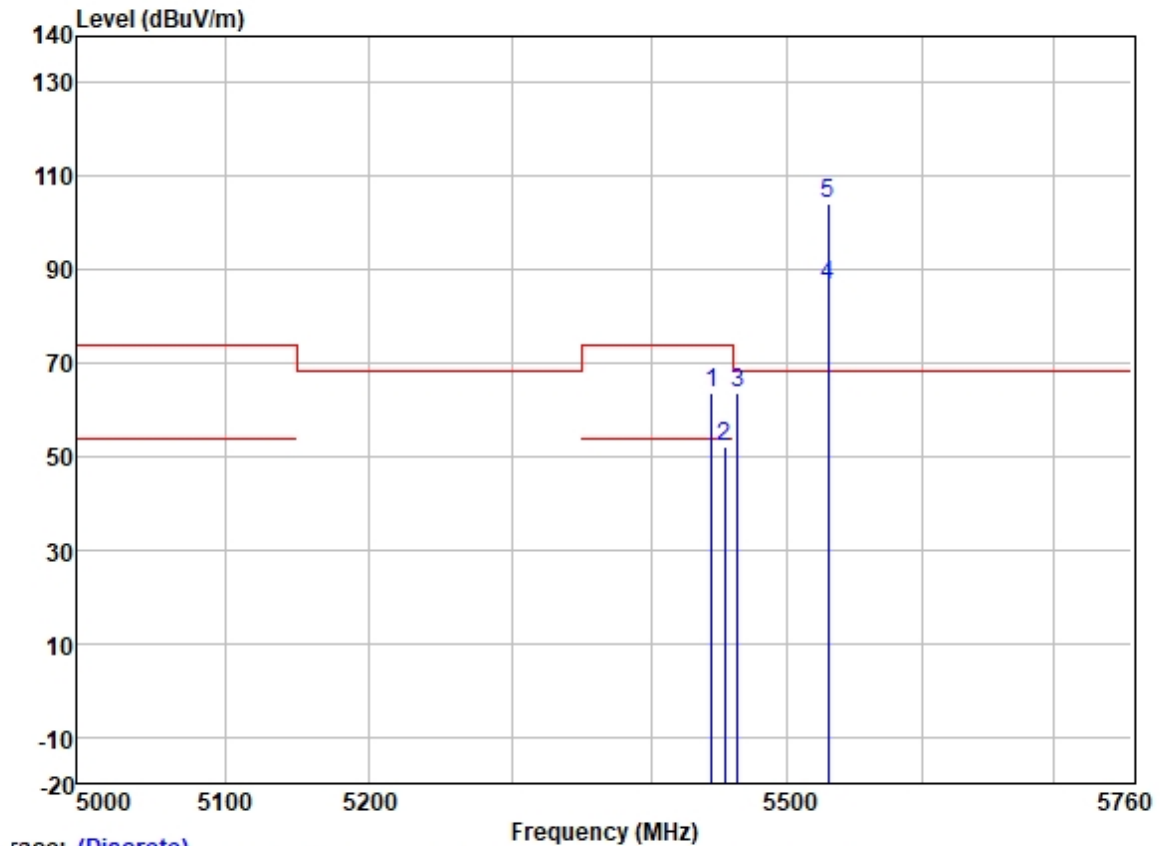

Trace: (Discrete)

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|-----|----------|-------------|--------|-------|--------|--------|--------|--------|-----------|---------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5444.270 | 62.52 | 31.79 | 6.20 | 36.88 | 63.63 | 74.00 | -10.37 | VERTICAL | Peak |
| 2 | 5453.561 | 51.01 | 31.79 | 6.26 | 36.88 | 52.18 | 54.00 | -1.82 | VERTICAL | Average |
| 3 | 5463.404 | 62.65 | 31.79 | 6.26 | 36.88 | 63.82 | 68.20 | -4.38 | VERTICAL | Peak |
| 4 | 5530.000 | 85.44 | 31.83 | 6.37 | 36.89 | 86.75 | ----- | ----- | VERTICAL | Average |
| 5 * | 5530.000 | 102.82 | 31.83 | 6.37 | 36.89 | 104.13 | 68.20 | 35.93 | VERTICAL | Peak |


Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: High

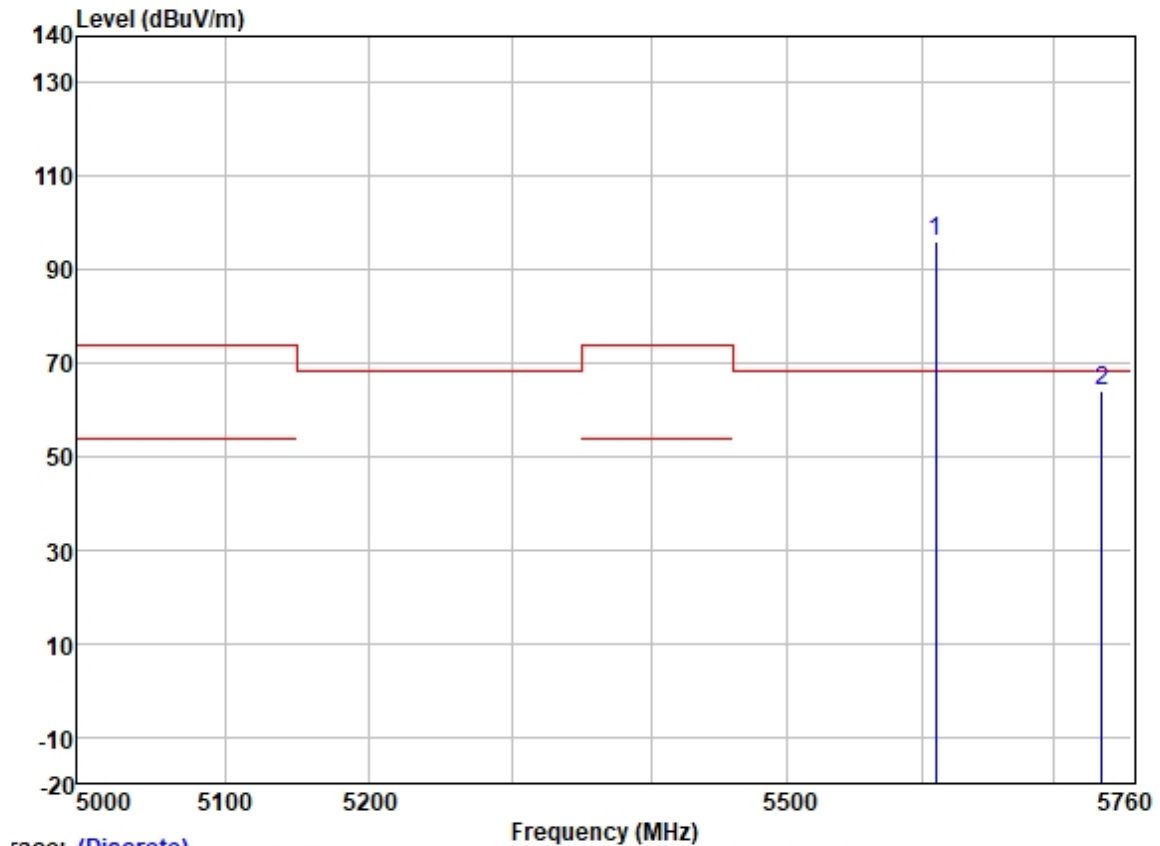

Trace: (Discrete)


| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark |
|-----|----------|------------|----------------|------------|---------------|-------------|------------|-----------|-----------------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dB | | |
| 1 * | 5610.000 | 94.87 | 31.91 | 6.32 | 36.89 | 96.21 | 68.20 | 28.01 | HORIZONTAL Peak |
| 2 | 5736.639 | 62.52 | 32.07 | 6.25 | 36.89 | 63.95 | 68.20 | -4.25 | HORIZONTAL Peak |

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: High

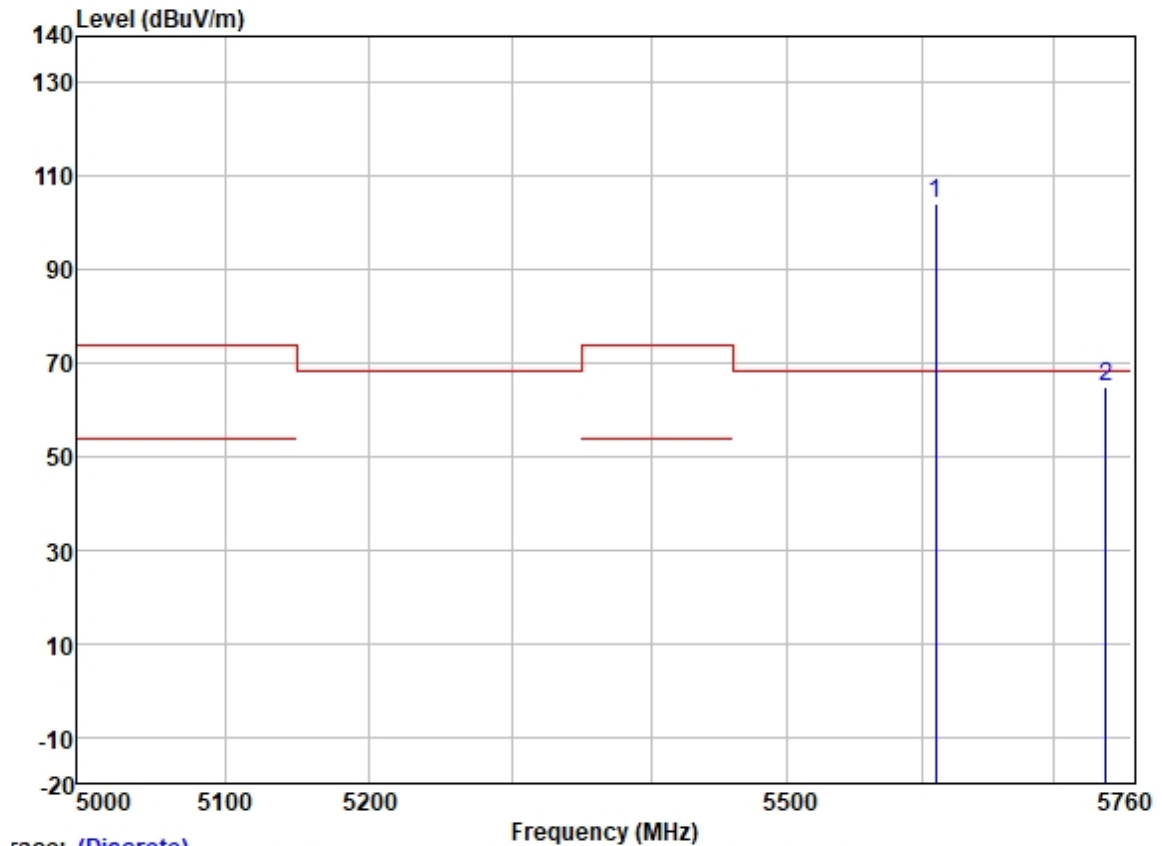

| | Read Freq | Antenna Level | Cable Factor | Preamp Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark |
|-----|-----------|---------------|--------------|-------------|---------------|-------------|------------|----------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dB | | |
| 1 * | 5610.000 | 102.87 | 31.91 | 6.32 | 36.89 | 104.21 | 68.20 | 36.01 VERTICAL | Peak |
| 2 | 5740.086 | 63.31 | 32.10 | 6.20 | 36.89 | 64.72 | 68.20 | -3.48 VERTICAL | Peak |


Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

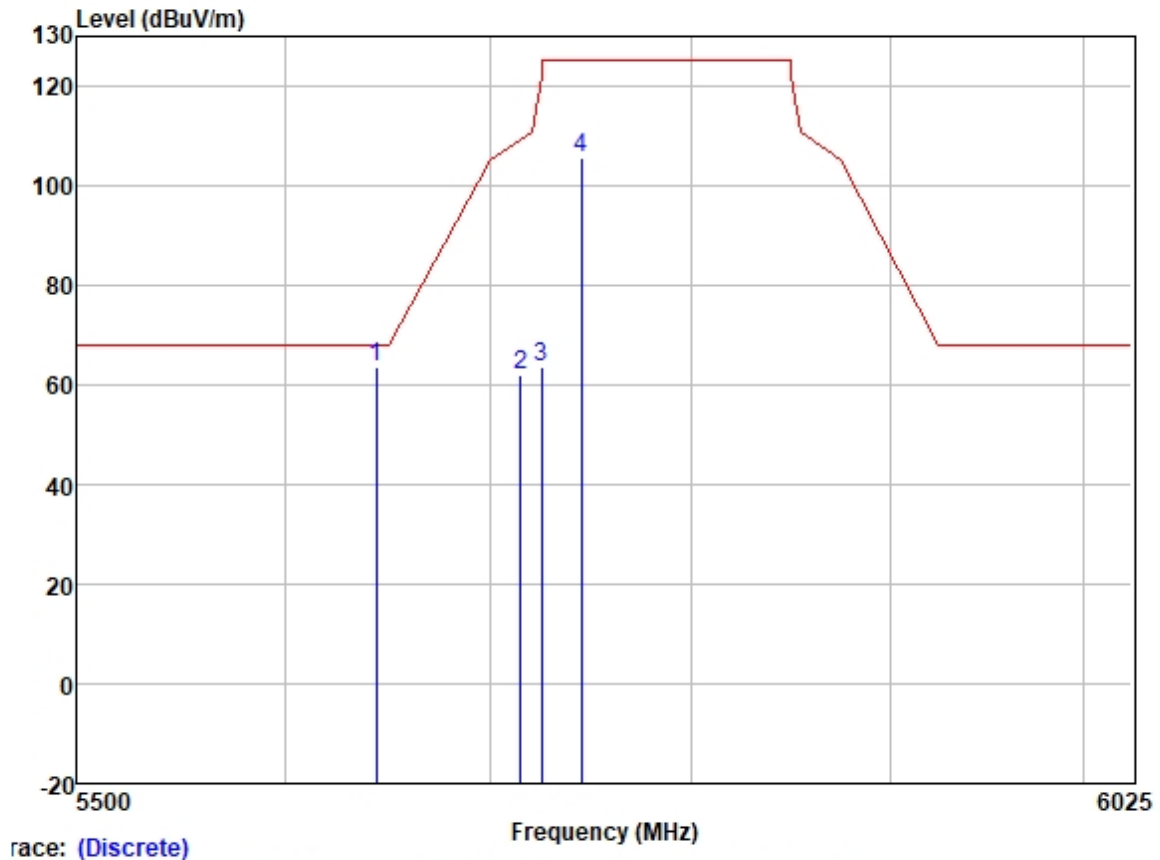

Trace: (Discrete)


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5644.012 | 62.01 | 31.95 | 6.35 | 36.89 | 63.42 | 68.20 | -4.78 | HORIZONTAL | Peak |
| 2 | 5715.000 | 60.64 | 32.04 | 6.33 | 36.89 | 62.12 | 109.40 | -47.28 | HORIZONTAL | Peak |
| 3 | 5725.000 | 61.99 | 32.07 | 6.25 | 36.89 | 63.42 | 122.20 | -58.78 | HORIZONTAL | Peak |
| 4 | 5745.000 | 103.99 | 32.10 | 6.20 | 36.89 | 105.40 | 125.20 | -19.80 | HORIZONTAL | Peak |

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

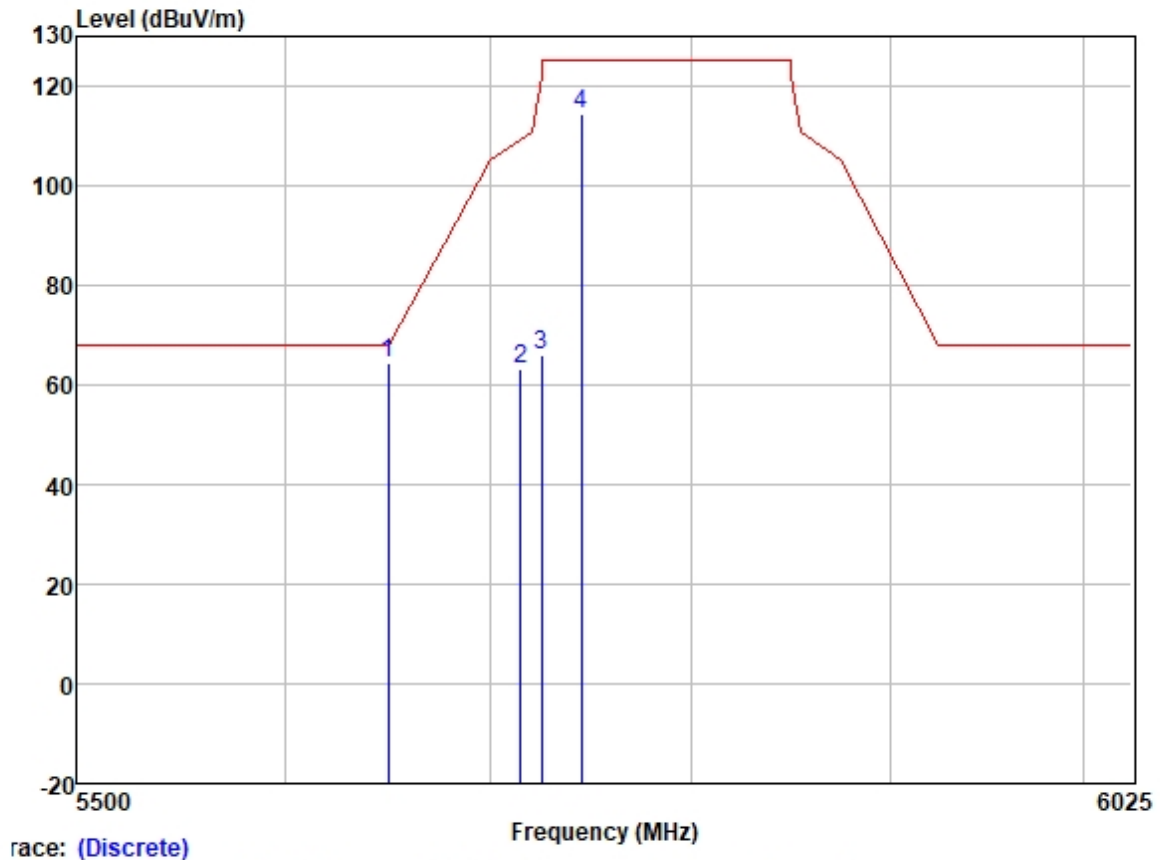

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5649.966 | 63.12 | 31.95 | 6.35 | 36.89 | 64.53 | 68.20 | -3.67 | VERTICAL | Peak |
| 2 | 5715.000 | 61.54 | 32.04 | 6.33 | 36.89 | 63.02 | 109.40 | -46.38 | VERTICAL | Peak |
| 3 | 5725.000 | 64.50 | 32.07 | 6.25 | 36.89 | 65.93 | 122.20 | -56.27 | VERTICAL | Peak |
| 4 | 5745.000 | 113.05 | 32.10 | 6.20 | 36.89 | 114.46 | 125.20 | -10.74 | VERTICAL | Peak |


Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

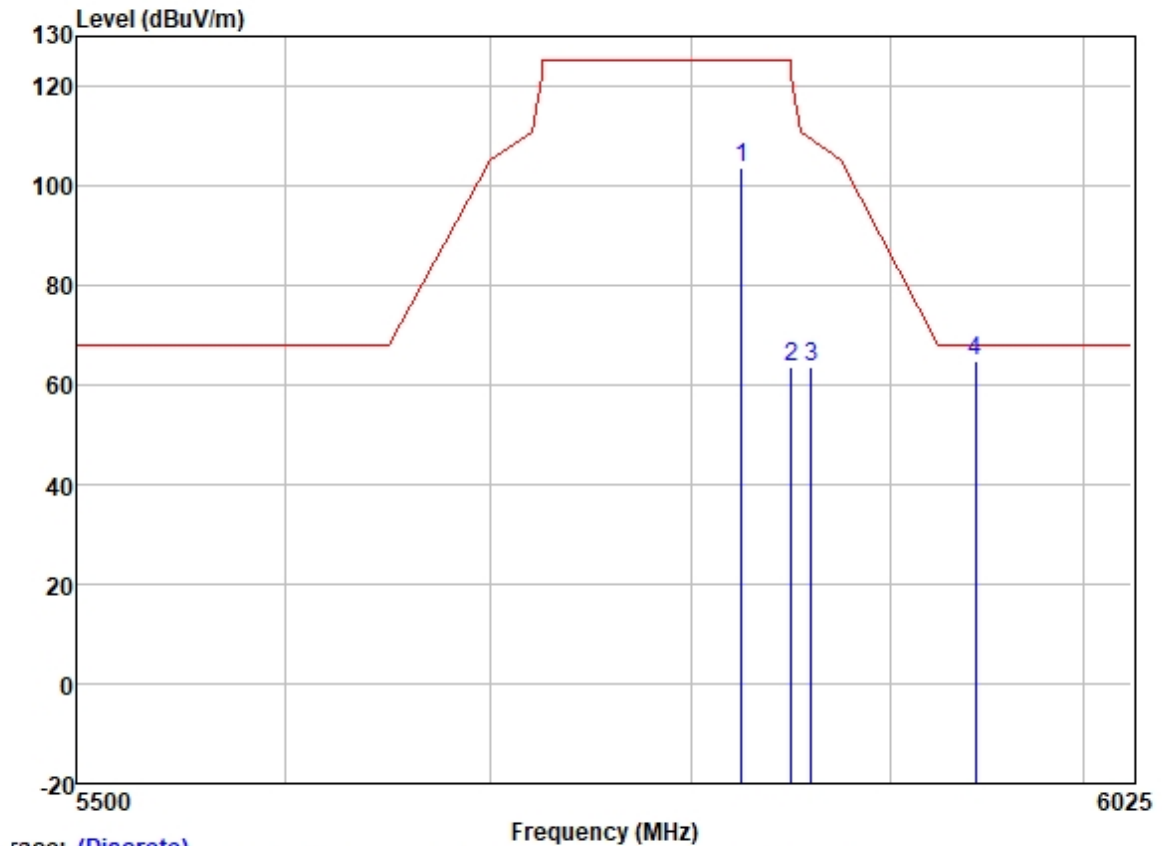

Trace: (Discrete)


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5825.000 | 102.12 | 32.23 | 6.04 | 36.90 | 103.49 | 125.20 | -21.71 | HORIZONTAL | Peak |
| 2 | 5850.000 | 62.12 | 32.25 | 6.00 | 36.90 | 63.47 | 122.20 | -58.73 | HORIZONTAL | Peak |
| 3 | 5860.000 | 62.13 | 32.27 | 5.96 | 36.90 | 63.46 | 109.40 | -45.94 | HORIZONTAL | Peak |
| 4 | 5943.744 | 63.27 | 32.36 | 6.05 | 36.90 | 64.78 | 68.20 | -3.42 | HORIZONTAL | Peak |

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

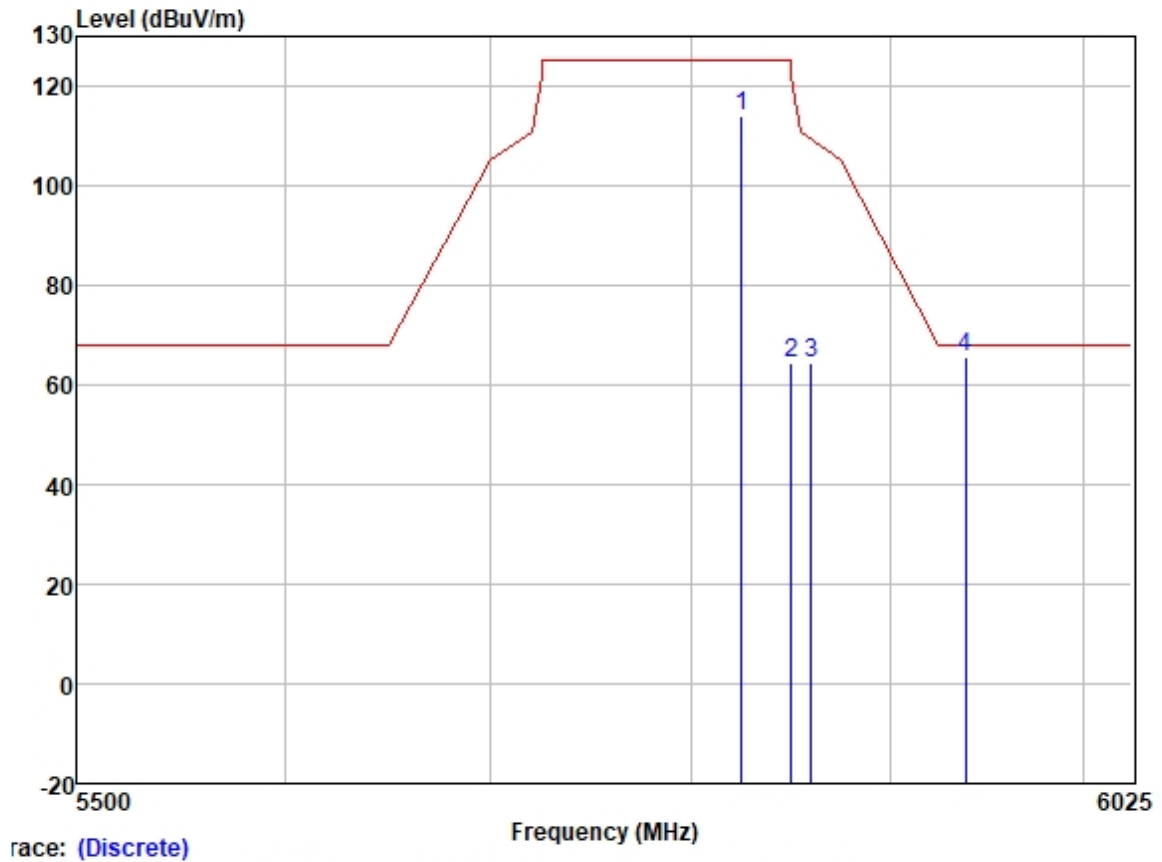

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5825.000 | 112.57 | 32.23 | 6.04 | 36.90 | 113.94 | 125.20 | -11.26 | VERTICAL | Peak |
| 2 | 5850.000 | 63.13 | 32.25 | 6.00 | 36.90 | 64.48 | 122.20 | -57.72 | VERTICAL | Peak |
| 3 | 5860.000 | 63.15 | 32.27 | 5.96 | 36.90 | 64.48 | 109.40 | -44.92 | VERTICAL | Peak |
| 4 | 5938.878 | 64.21 | 32.34 | 6.00 | 36.90 | 65.65 | 68.20 | -2.55 | VERTICAL | Peak |


Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

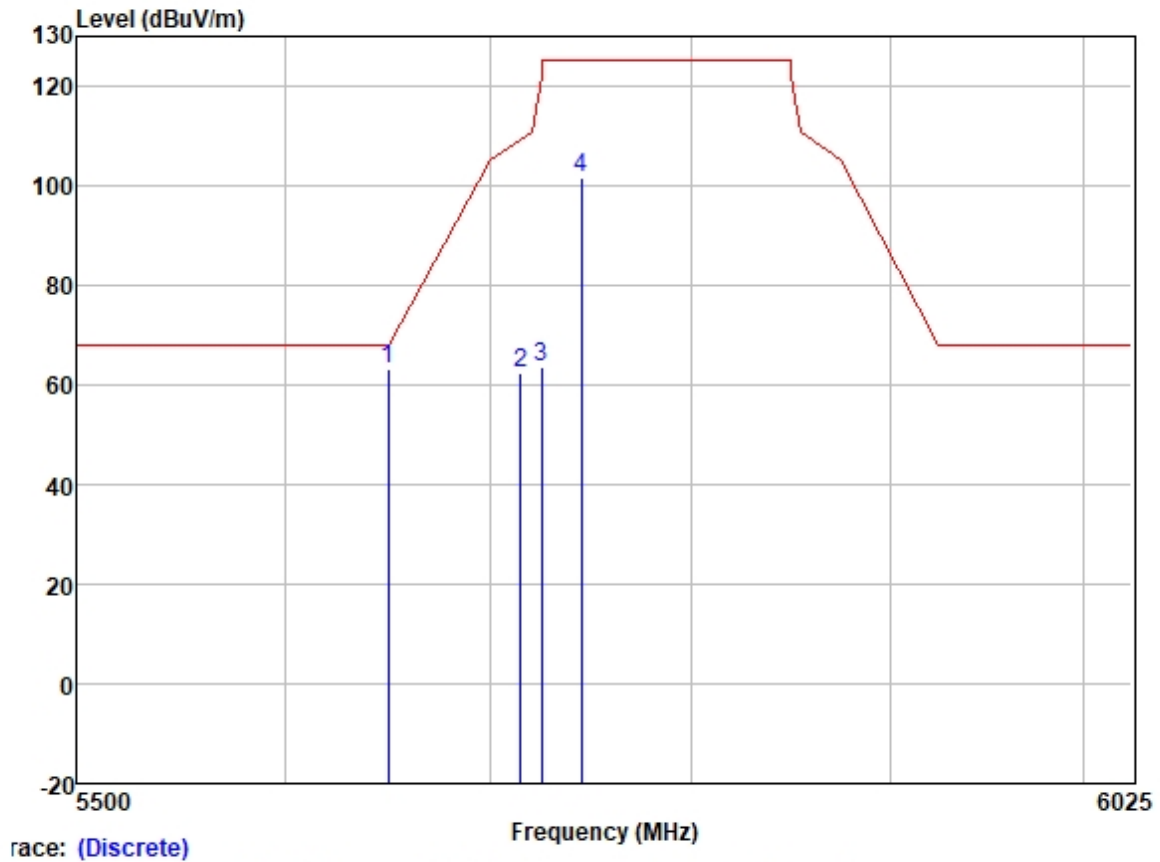

Trace: (Discrete)


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5649.827 | 61.95 | 31.95 | 6.35 | 36.89 | 63.36 | 68.20 | -4.84 | HORIZONTAL | Peak |
| 2 | 5715.000 | 60.80 | 32.04 | 6.33 | 36.89 | 62.28 | 109.40 | -47.12 | HORIZONTAL | Peak |
| 3 | 5725.000 | 61.98 | 32.07 | 6.25 | 36.89 | 63.41 | 122.20 | -58.79 | HORIZONTAL | Peak |
| 4 | 5745.000 | 100.33 | 32.10 | 6.20 | 36.89 | 101.74 | 125.20 | -23.46 | HORIZONTAL | Peak |

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

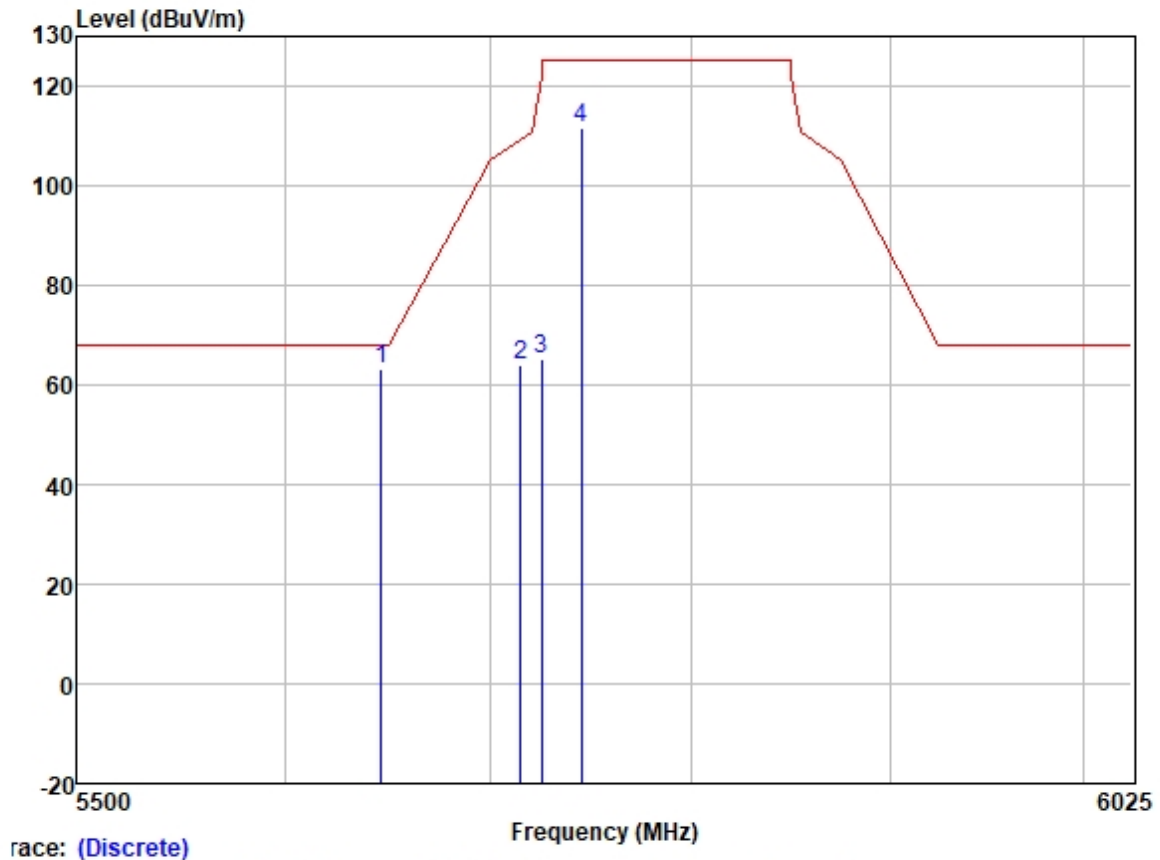

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5646.503 | 61.85 | 31.95 | 6.35 | 36.89 | 63.26 | 68.20 | -4.94 | VERTICAL | Peak |
| 2 | 5715.000 | 62.36 | 32.04 | 6.33 | 36.89 | 63.84 | 109.40 | -45.56 | VERTICAL | Peak |
| 3 | 5725.000 | 63.90 | 32.07 | 6.25 | 36.89 | 65.33 | 122.20 | -56.87 | VERTICAL | Peak |
| 4 | 5745.000 | 110.00 | 32.10 | 6.20 | 36.89 | 111.41 | 125.20 | -13.79 | VERTICAL | Peak |


Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

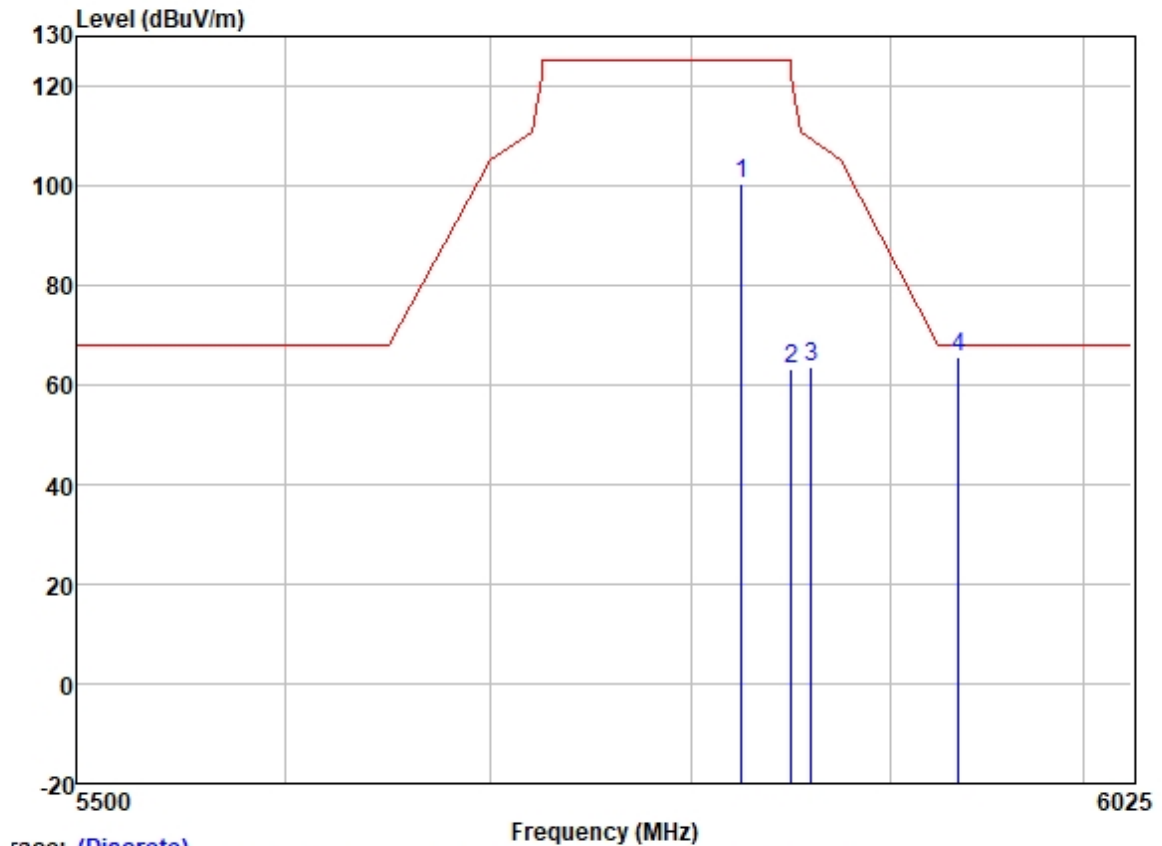

Trace: (Discrete)


| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5825.000 | 99.20 | 32.23 | 6.04 | 36.90 | 100.57 | 125.20 | -24.63 | HORIZONTAL | Peak |
| 2 | 5850.000 | 61.68 | 32.25 | 6.00 | 36.90 | 63.03 | 122.20 | -59.17 | HORIZONTAL | Peak |
| 3 | 5860.000 | 62.28 | 32.27 | 5.96 | 36.90 | 63.61 | 109.40 | -45.79 | HORIZONTAL | Peak |
| 4 | 5935.427 | 64.06 | 32.34 | 6.00 | 36.90 | 65.50 | 68.20 | -2.70 | HORIZONTAL | Peak |

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

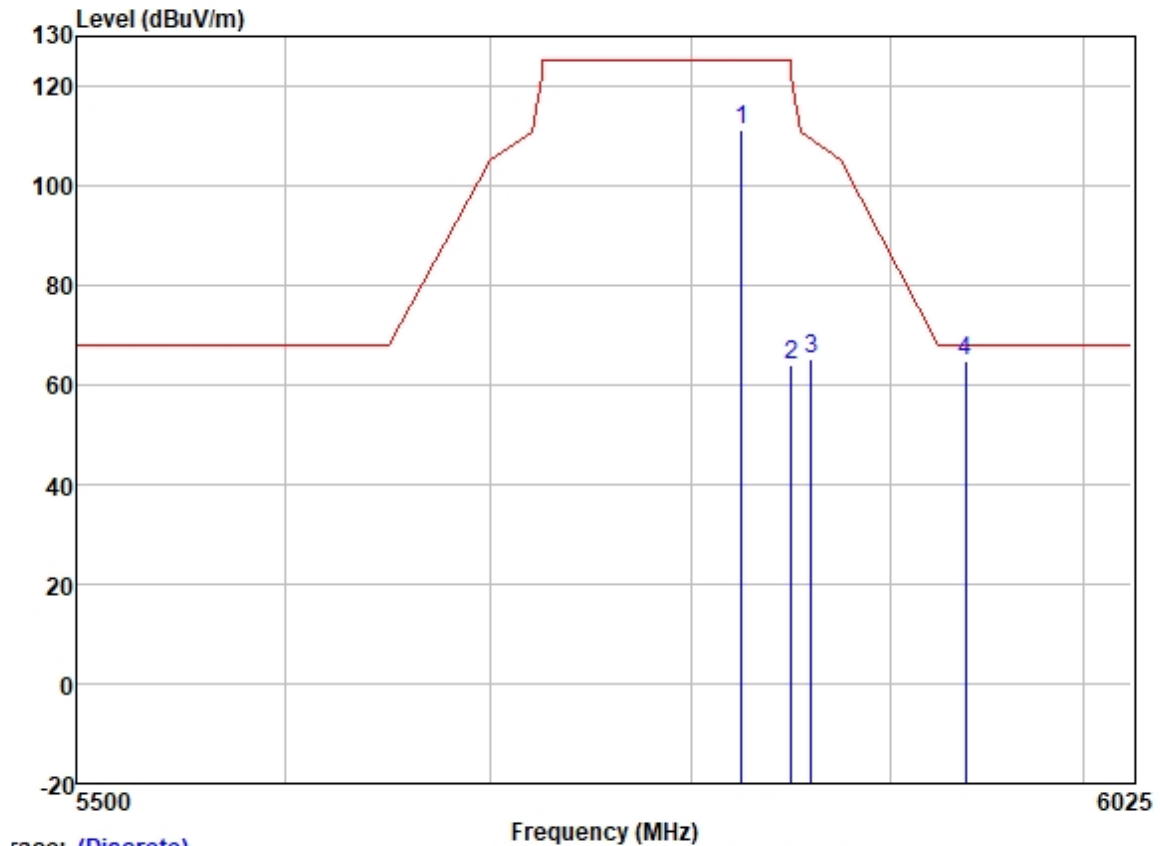

| race: (Discrete) | Frequency (MHz) | | | | | | | | | |
|------------------|-----------------|--------|---------|-------|--------|--------|--------|--------|-----------|--------|
| | | Read | Antenna | Cable | Preamp | | Limit | Over | | |
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5825.000 | 109.73 | 32.23 | 6.04 | 36.90 | 111.10 | 125.20 | -14.10 | VERTICAL | Peak |
| 2 | 5850.000 | 62.67 | 32.25 | 6.00 | 36.90 | 64.02 | 122.20 | -58.18 | VERTICAL | Peak |
| 3 | 5860.000 | 63.80 | 32.27 | 5.96 | 36.90 | 65.13 | 109.40 | -44.27 | VERTICAL | Peak |
| 4 | 5938.878 | 63.48 | 32.34 | 6.00 | 36.90 | 64.92 | 68.20 | -3.28 | VERTICAL | Peak |

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

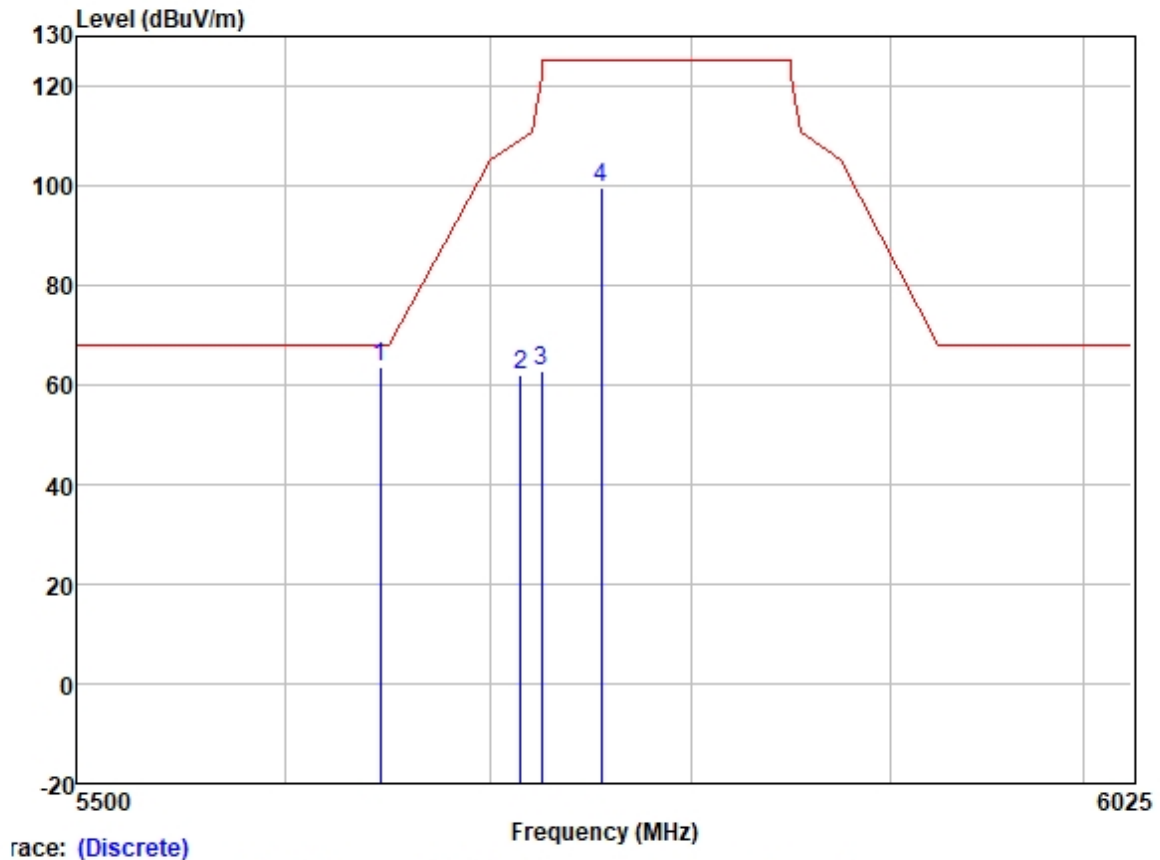

| | | ReadAntenna | | Cable | Preamp | | Limit | Over | | |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Pol/Phase | Remark |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 5646.120 | 62.12 | 31.95 | 6.35 | 36.89 | 63.53 | 68.20 | -4.67 | HORIZONTAL | Peak |
| 2 | 5715.000 | 60.50 | 32.04 | 6.33 | 36.89 | 61.98 | 109.40 | -47.42 | HORIZONTAL | Peak |
| 3 | 5725.000 | 61.28 | 32.07 | 6.25 | 36.89 | 62.71 | 122.20 | -59.49 | HORIZONTAL | Peak |
| 4 | 5755.000 | 98.14 | 32.10 | 6.20 | 36.89 | 99.55 | 125.20 | -25.65 | HORIZONTAL | Peak |