





Site: AC102	Time: 2015/07/12 - 18:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant0	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.834	-0.096	-28.366	68.2	39.930	AV
2		5725.000	40.254	0.311	-37.946	78.2	39.943	AV
3	*	5749.800	78.648	38.679	N/A	N/A	39.970	AV

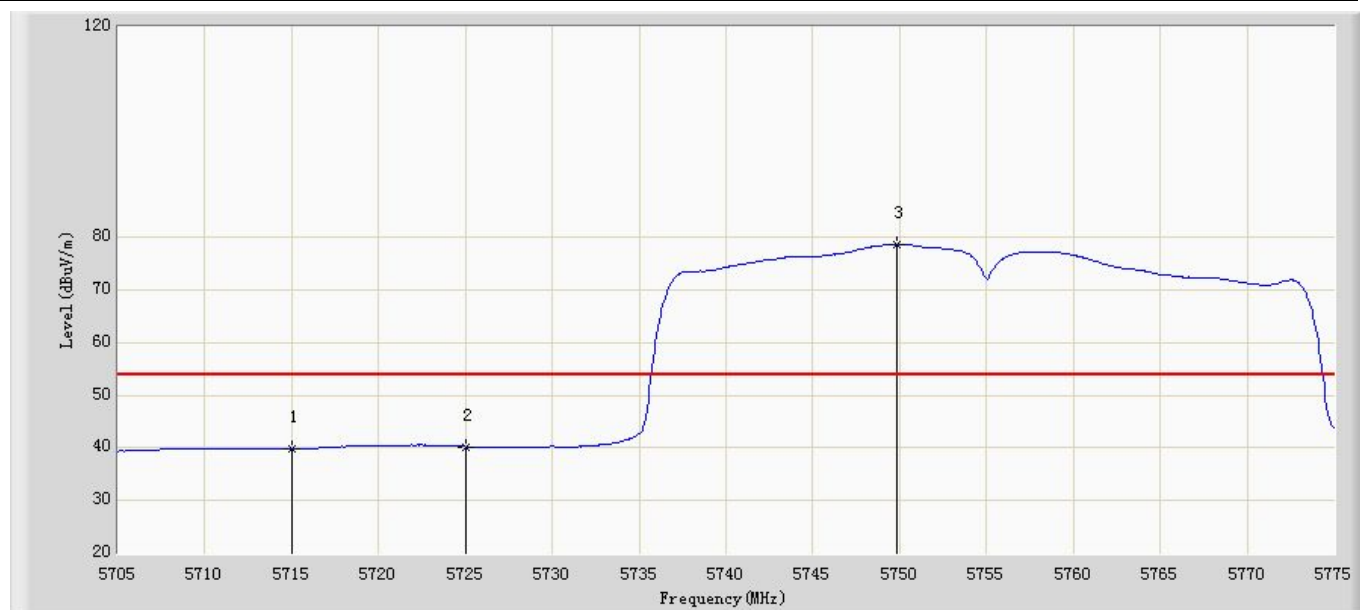


Site: AC102	Time: 2015/07/12 - 18:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant0	

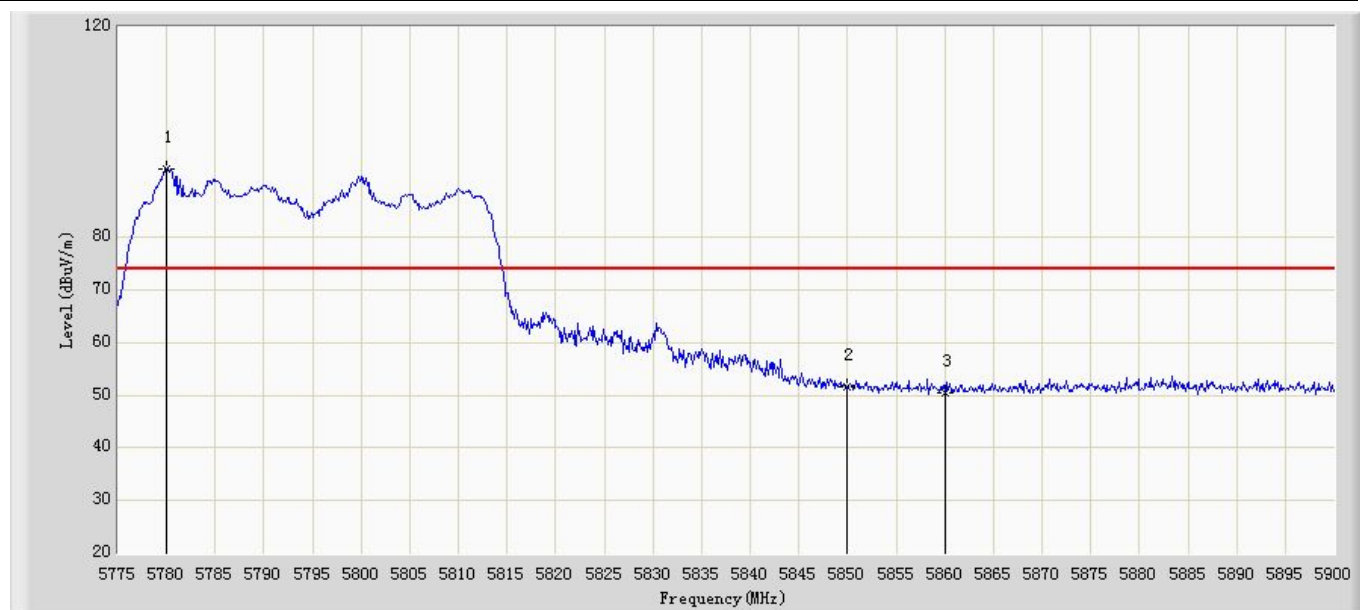

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5780.000	92.866	52.860	N/A	N/A	40.005	PK
2		5850.000	51.671	11.565	-26.529	78.2	40.106	PK
3		5860.000	50.448	10.328	-17.752	68.2	40.120	PK




Site: AC102	Time: 2015/07/12 - 18:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant0	

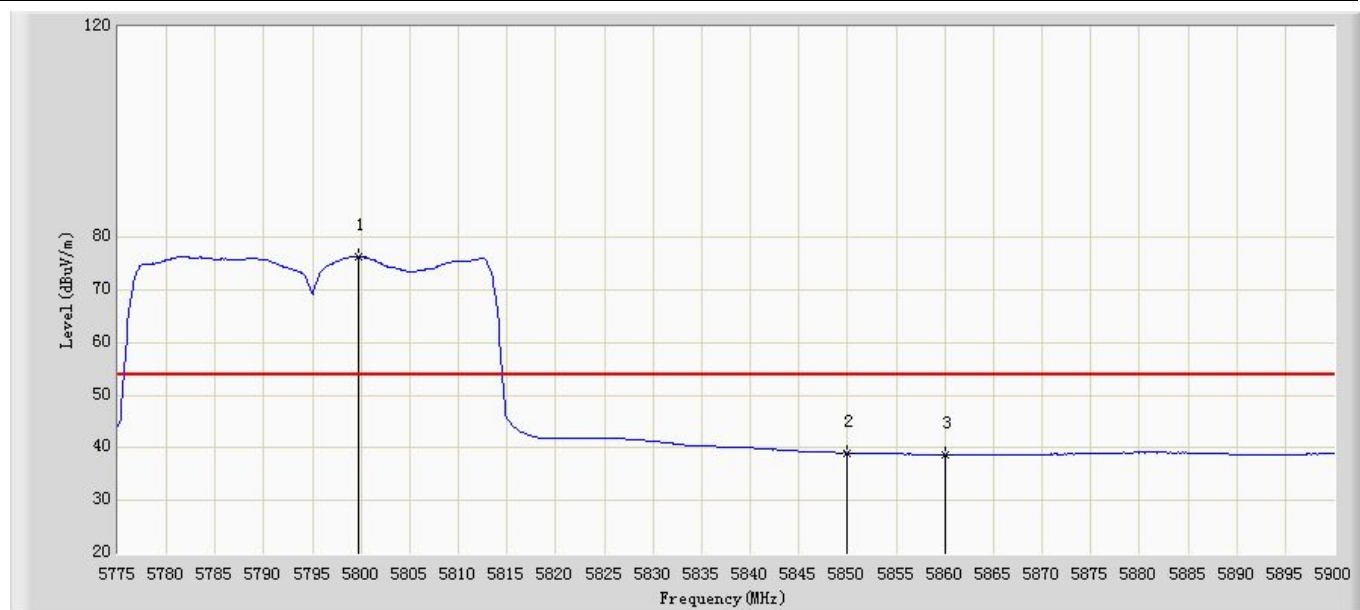

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5799.750	76.329	36.296	N/A	N/A	40.034	AV
2		5850.000	39.074	-1.032	-39.126	78.2	40.106	AV
3		5860.000	38.696	-1.424	-29.504	68.2	40.120	AV




Site: AC102	Time: 2015/07/12 - 18:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant0	

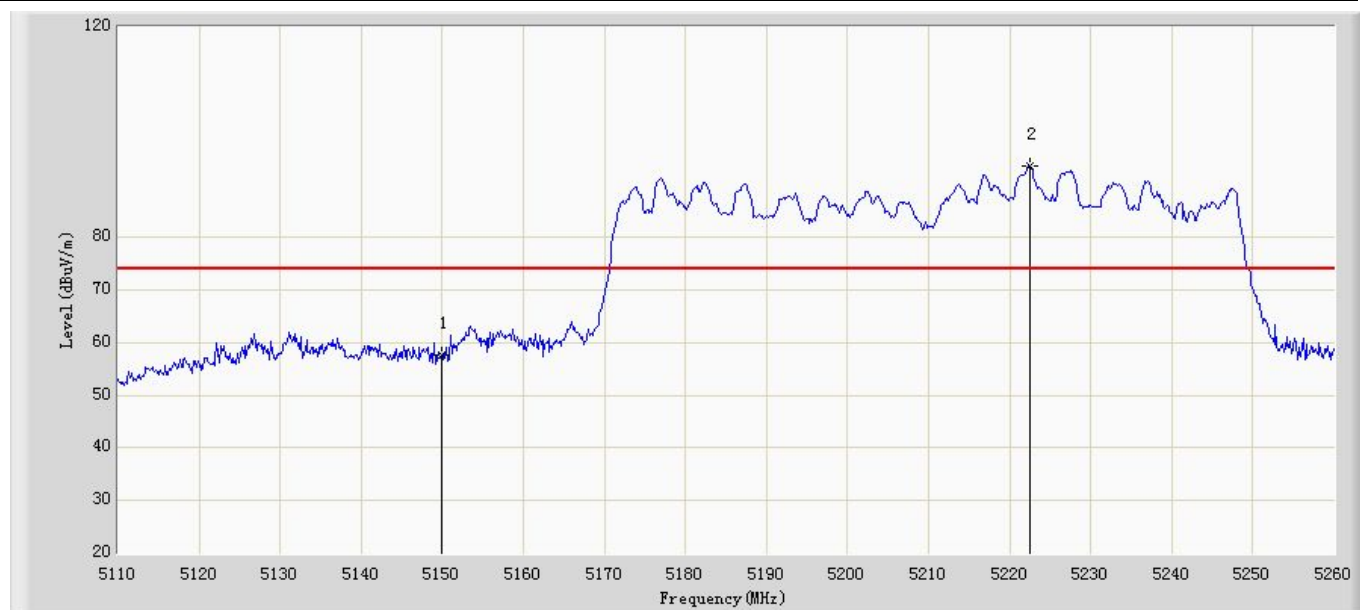

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	57.713	18.066	-16.287	74.000	39.647	PK
2	*	5222.500	93.471	53.829	N/A	N/A	39.642	PK




Site: AC102	Time: 2015/07/12 - 18:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant0	

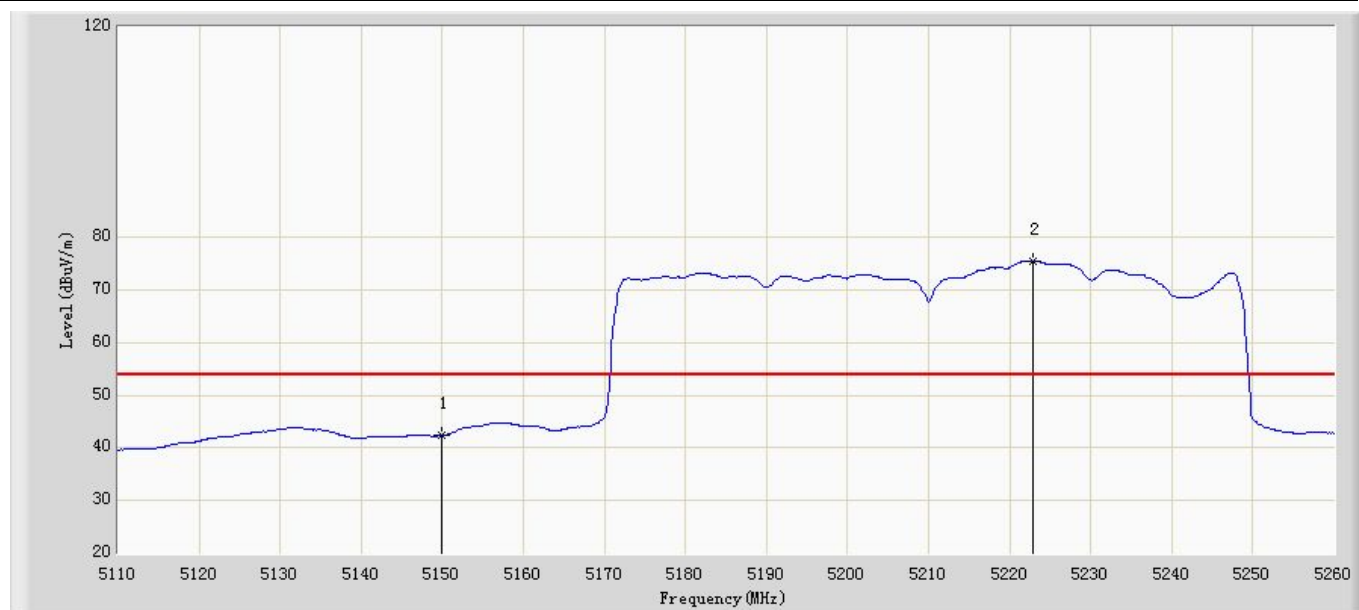

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	42.436	2.789	-11.564	54.000	39.647	AV
2	*	5222.800	75.572	35.930	N/A	N/A	39.642	AV




Site: AC102	Time: 2015/07/12 - 18:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant0	

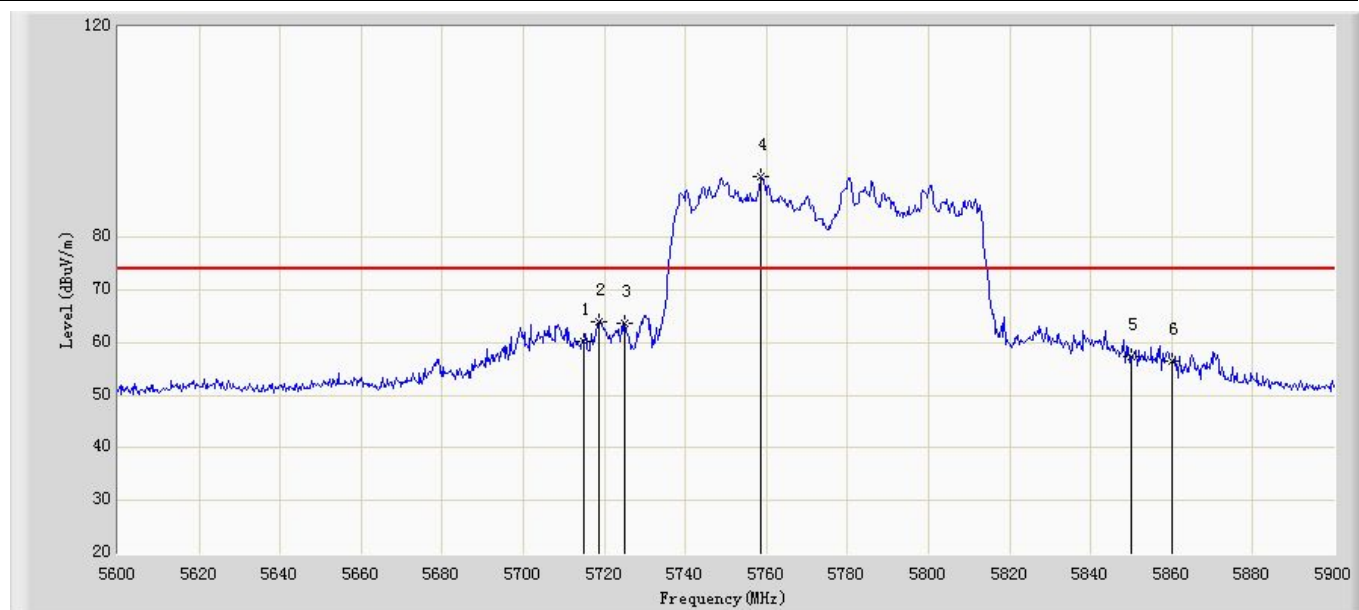

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	60.21	20.28	-7.99	68.2	39.930	PK
2		5718.800	64.08	24.145	-14.12	78.2	39.935	PK
3		5725.000	63.65	23.707	-14.55	78.2	39.943	PK
4	*	5758.700	91.434	51.455	N/A	N/A	39.979	PK
5		5850.000	57.224	17.118	-20.976	78.2	40.106	PK
6		5860.000	56.625	16.505	-11.575	68.2	40.120	PK




Site: AC102	Time: 2015/07/12 - 19:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant0	

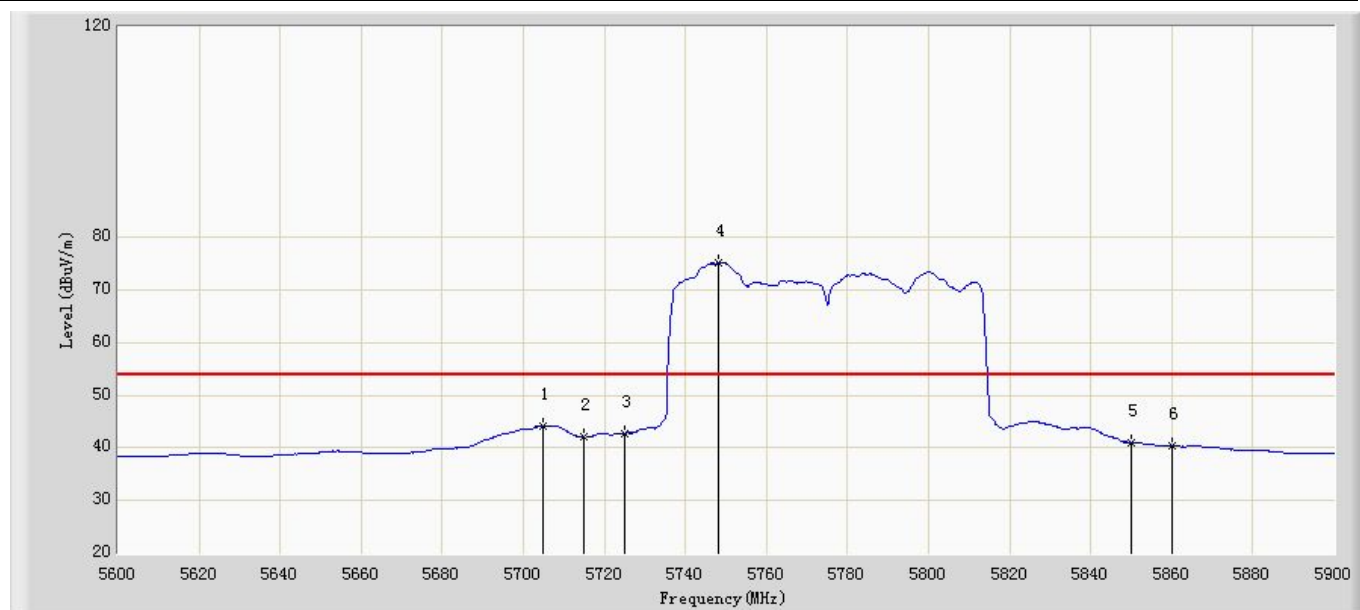

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5705.000	44.104	4.190	-9.896	68.2	39.914	AV
2		5715.000	42.004	2.074	-26.196	68.2	39.930	AV
3		5725.000	42.798	2.855	-35.402	78.2	39.943	AV
4	*	5748.200	75.289	35.322	N/A	N/A	39.967	AV
5		5850.000	41.096	0.990	-37.104	78.2	40.106	AV
6		5860.000	40.375	0.255	-27.825	68.2	40.120	AV




Site: AC102	Time: 2015/07/12 - 19:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5180 by 802.11a Ant1	

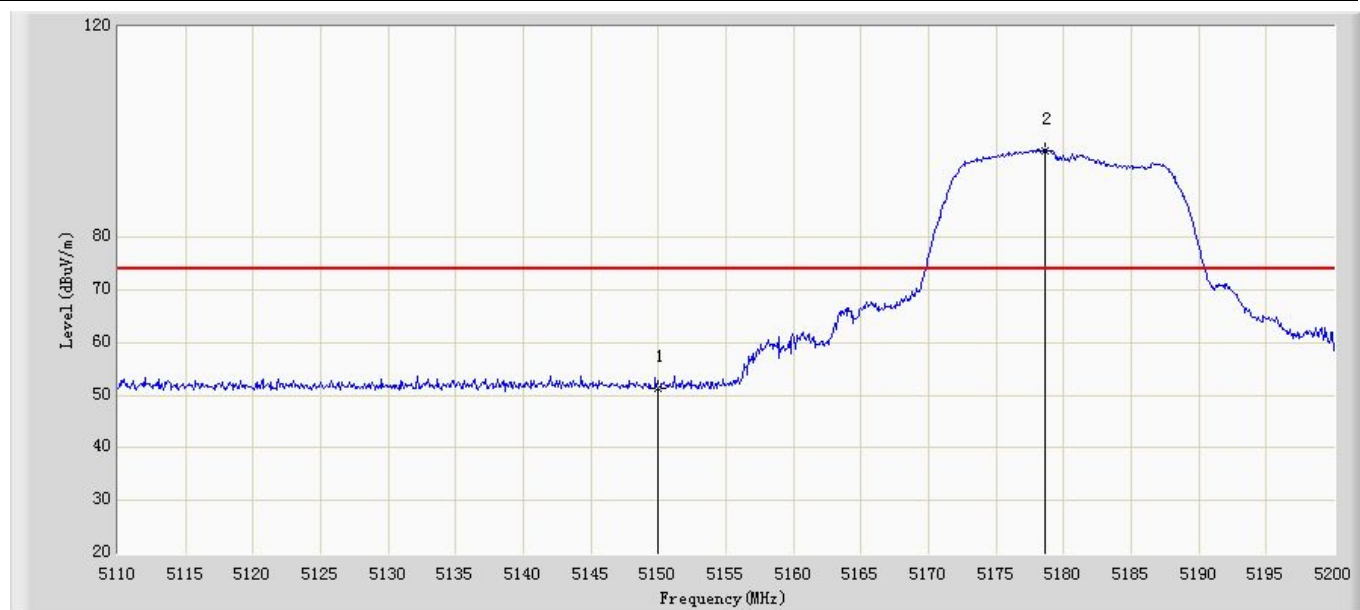

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	51.432	11.785	-22.568	74.000	39.647	PK
2	*	5178.580	96.333	56.694	N/A	N/A	39.639	PK




Site: AC102	Time: 2015/07/12 - 19:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5180 by 802.11a Ant1	

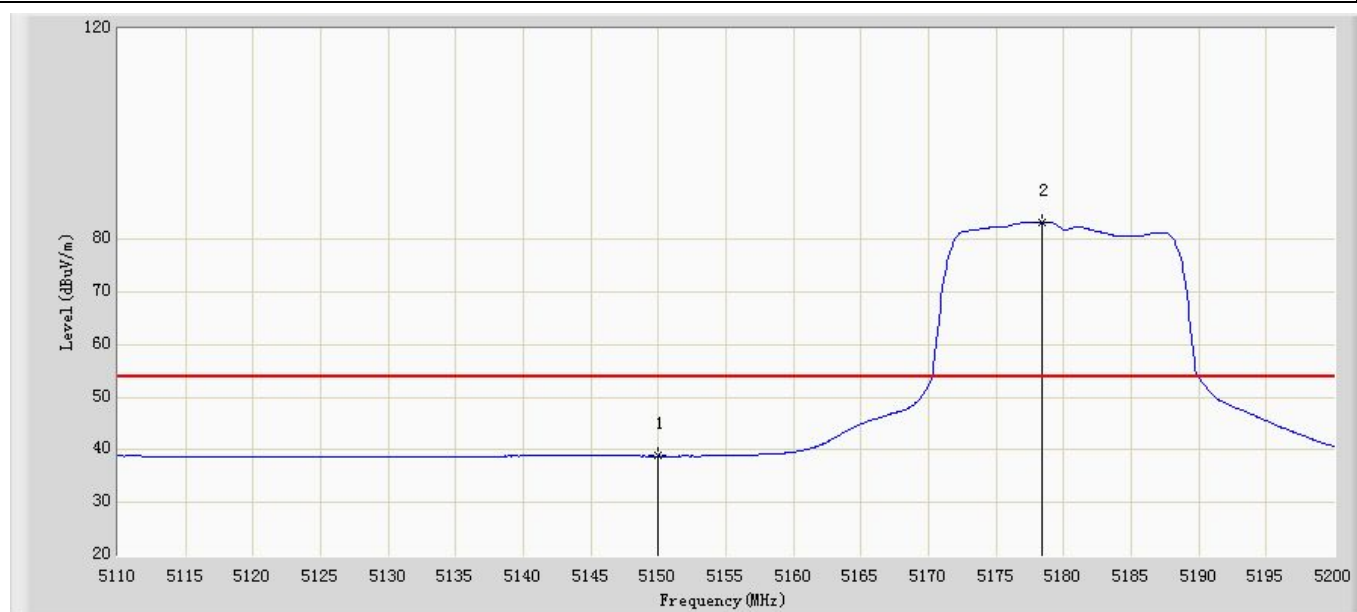

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	38.827	-0.820	-15.173	54.000	39.647	AV
2	*	5178.400	83.209	43.570	N/A	N/A	39.639	AV




Site: AC102	Time: 2015/07/12 - 19:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5240 by 802.11a Ant1	

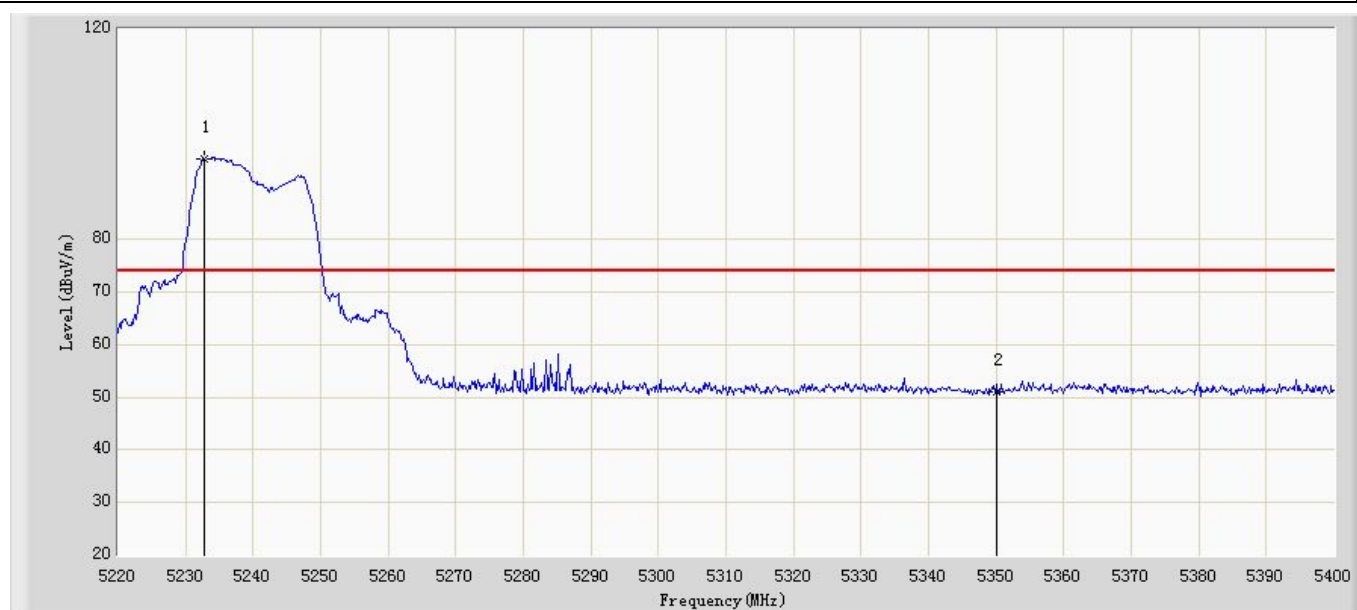

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.780	95.377	55.736	N/A	N/A	39.641	PK
2		5350.000	51.008	11.388	-22.992	74.000	39.620	PK



Site: AC102	Time: 2015/07/12 - 19:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5240 by 802.11a Ant1	

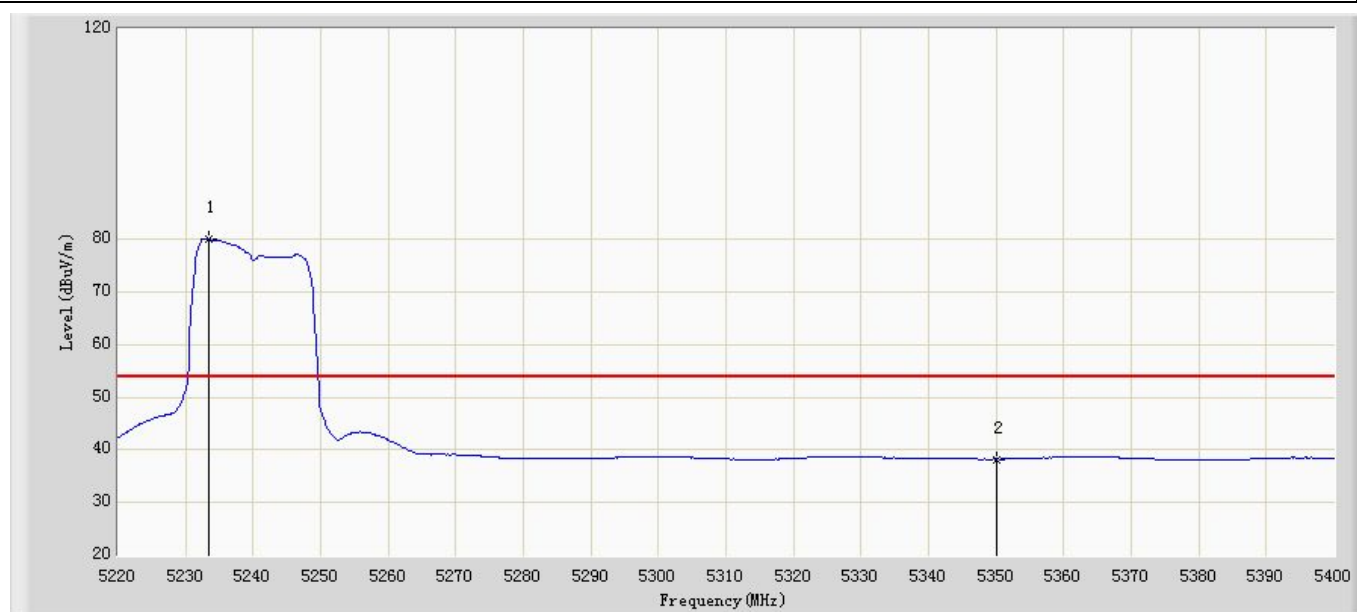

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5233.500	79.998	40.357	N/A	N/A	39.641	AV
2		5350.000	38.234	-1.386	-15.766	54.000	39.620	AV




Site: AC102	Time: 2015/07/12 - 19:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5745 by 802.11a Ant1	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	51.743	11.813	-16.457	68.2	39.930	PK
2		5725.000	60.16	20.217	-18.04	78.2	39.943	PK
3	*	5751.550	96.032	56.061	N/A	N/A	39.971	PK




Site: AC102	Time: 2015/07/12 - 19:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5745 by 802.11a Ant1	

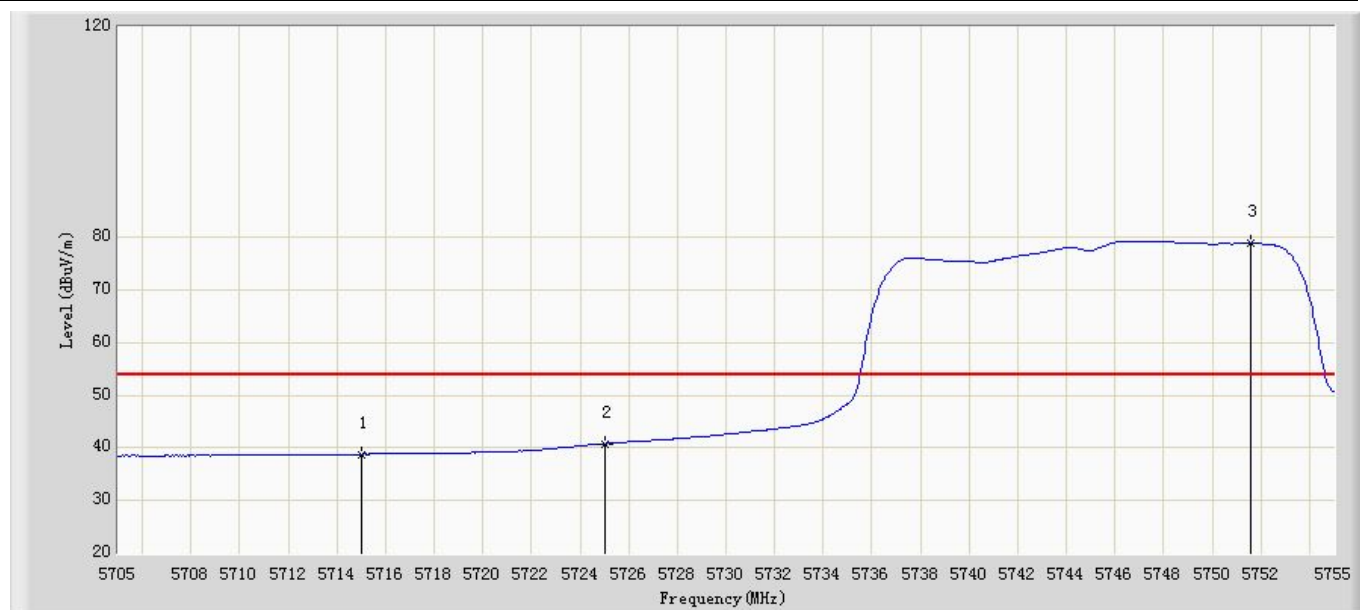

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	38.82	-1.11	-29.38	68.2	39.930	AV
2		5725.000	40.772	0.829	-37.428	78.2	39.943	AV
3	*	5751.550	78.959	38.988	N/A	N/A	39.971	AV




Site: AC102	Time: 2015/07/12 - 19:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5825 by 802.11a Ant1	

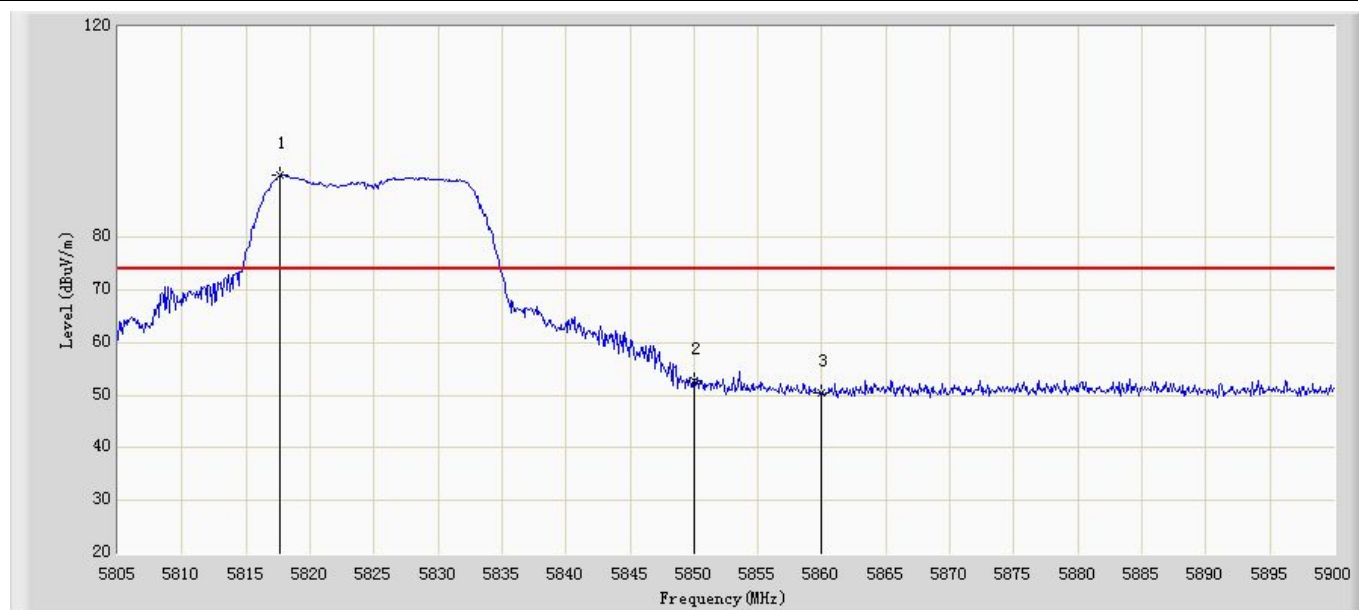

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5817.635	91.713	51.659	N/A	N/A	40.054	PK
2		5850.000	52.661	12.555	-25.539	78.2	40.106	PK
3		5860.000	50.588	10.468	-17.612	68.2	40.120	PK




Site: AC102	Time: 2015/07/12 - 19:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode1:TX at channel 5825 by 802.11a Ant1	

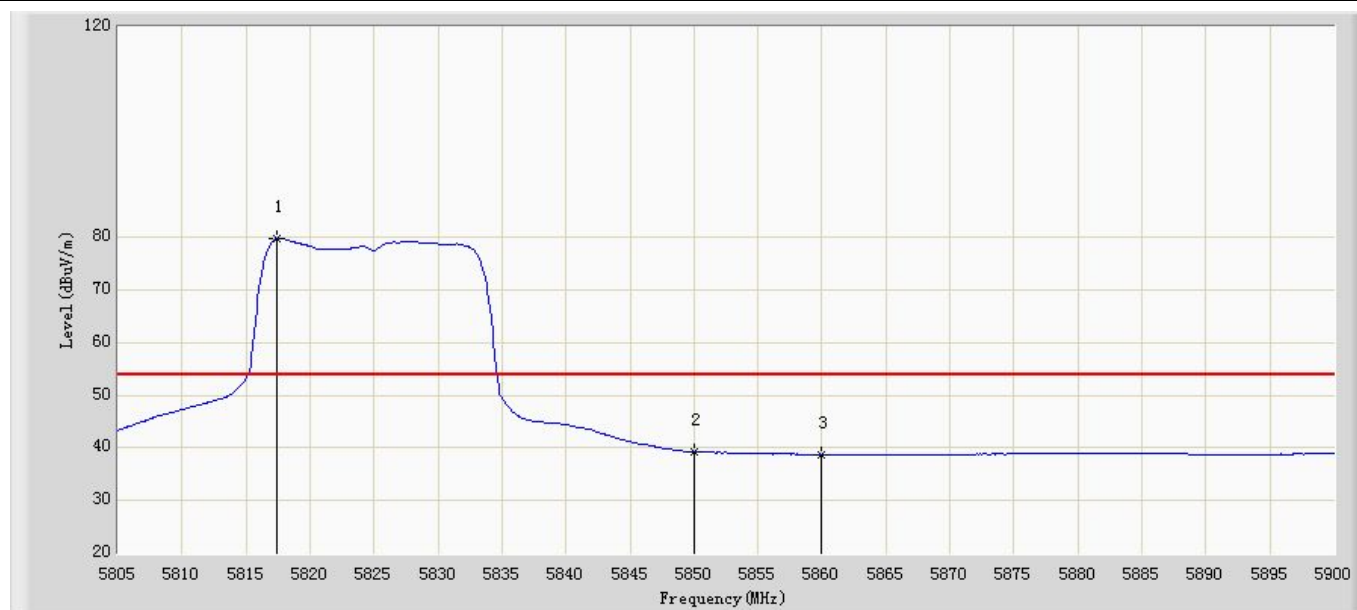

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5817.350	79.785	39.732	N/A	N/A	40.053	AV
2		5850.000	39.235	-0.871	-38.965	78.2	40.106	AV
3		5860.000	38.755	-1.365	-29.445	68.2	40.120	AV




Site: AC102	Time: 2015/07/12 - 19:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant1	

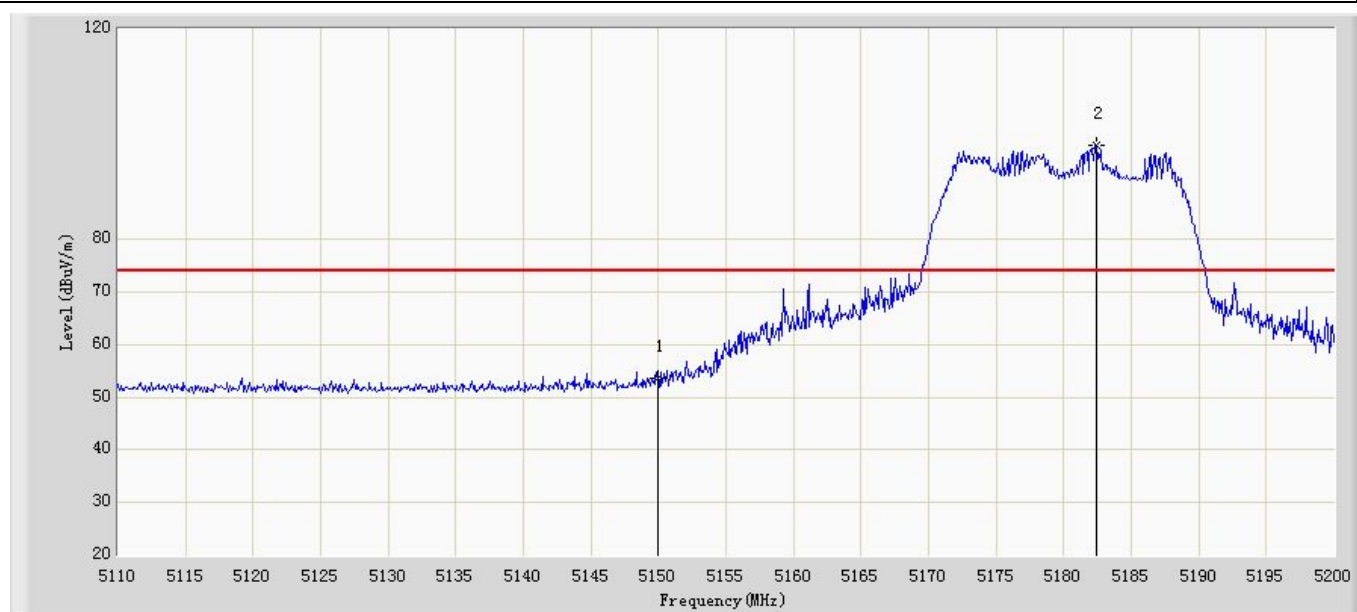

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	53.633	13.986	-20.367	74.000	39.647	PK
2	*	5182.450	97.823	58.184	N/A	N/A	39.639	PK




Site: AC102	Time: 2015/07/12 - 19:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant1	

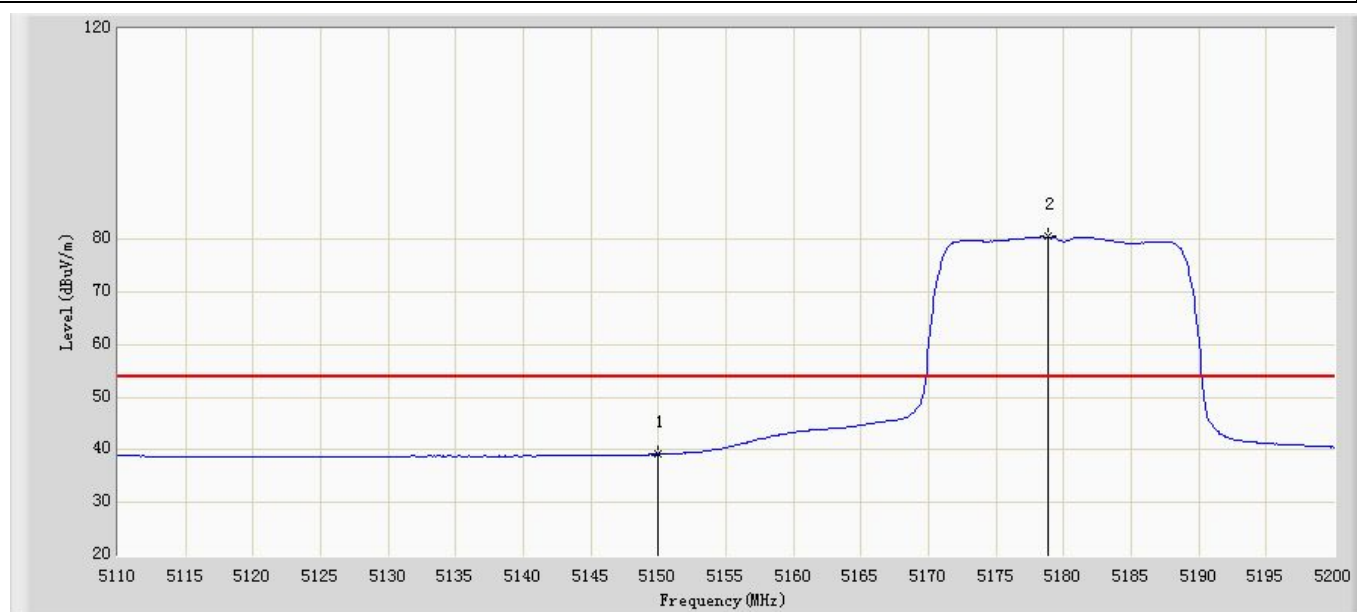

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	39.153	-0.494	-14.847	54.000	39.647	AV
2	*	5178.850	80.493	40.854	N/A	N/A	39.640	AV




Site: AC102	Time: 2015/07/12 - 19:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant1	

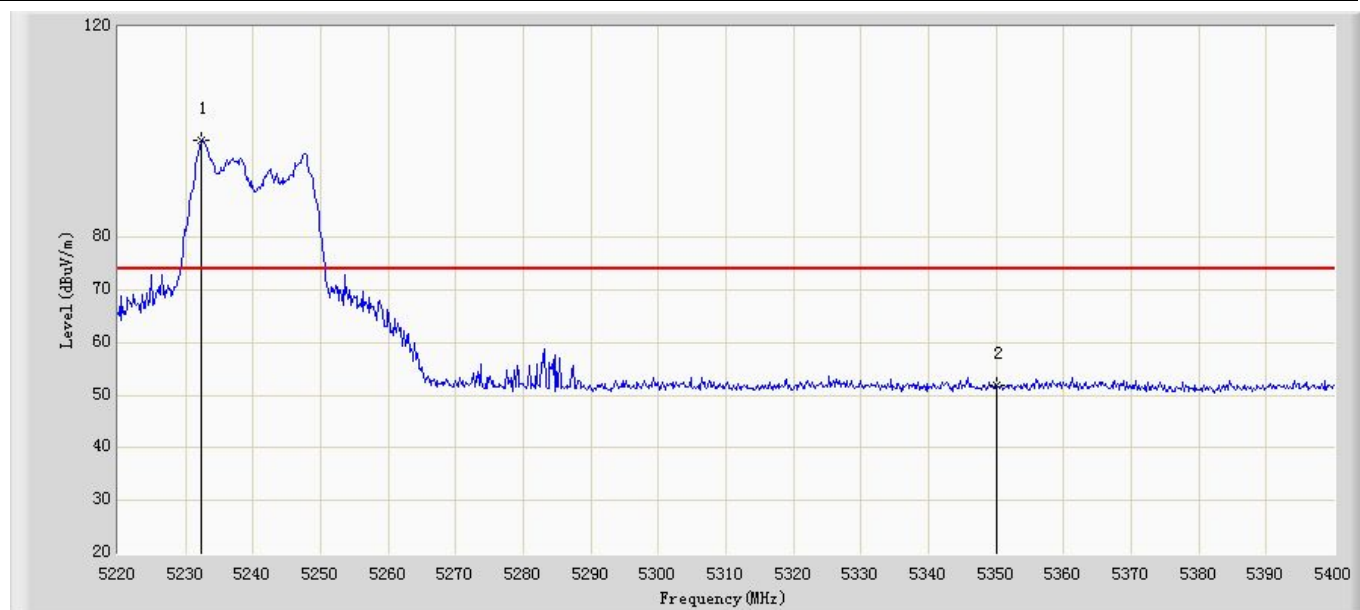

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.420	98.519	58.878	N/A	N/A	39.641	PK
2		5350.000	51.879	12.259	-22.121	74.000	39.620	PK




Site: AC102	Time: 2015/07/12 - 19:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant1	

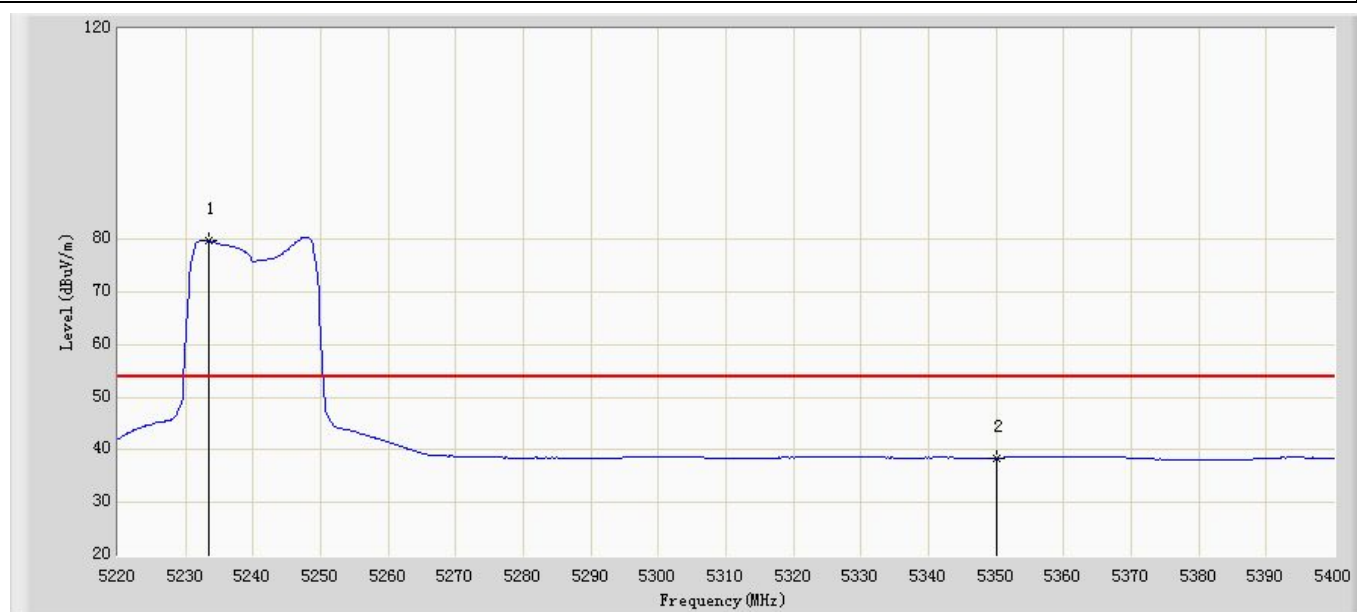

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5233.500	79.674	40.033	N/A	N/A	39.641	AV
2		5350.000	38.445	-1.175	-15.555	54.000	39.620	AV




Site: AC102	Time: 2015/07/12 - 19:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant1	

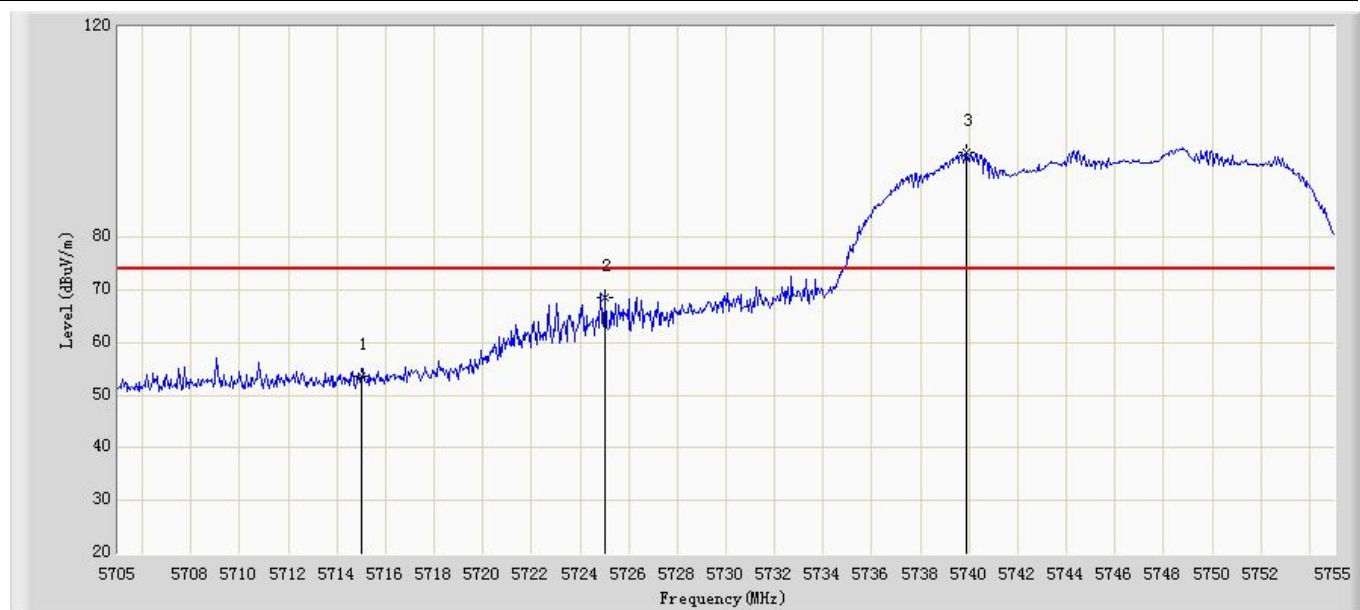

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	53.701	13.771	-14.499	68.2	39.930	PK
2		5725.000	68.548	28.605	-9.652	78.2	39.943	PK
3	*	5739.900	96.083	56.125	N/A	N/A	39.959	PK




Site: AC102	Time: 2015/07/12 - 19:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant1	

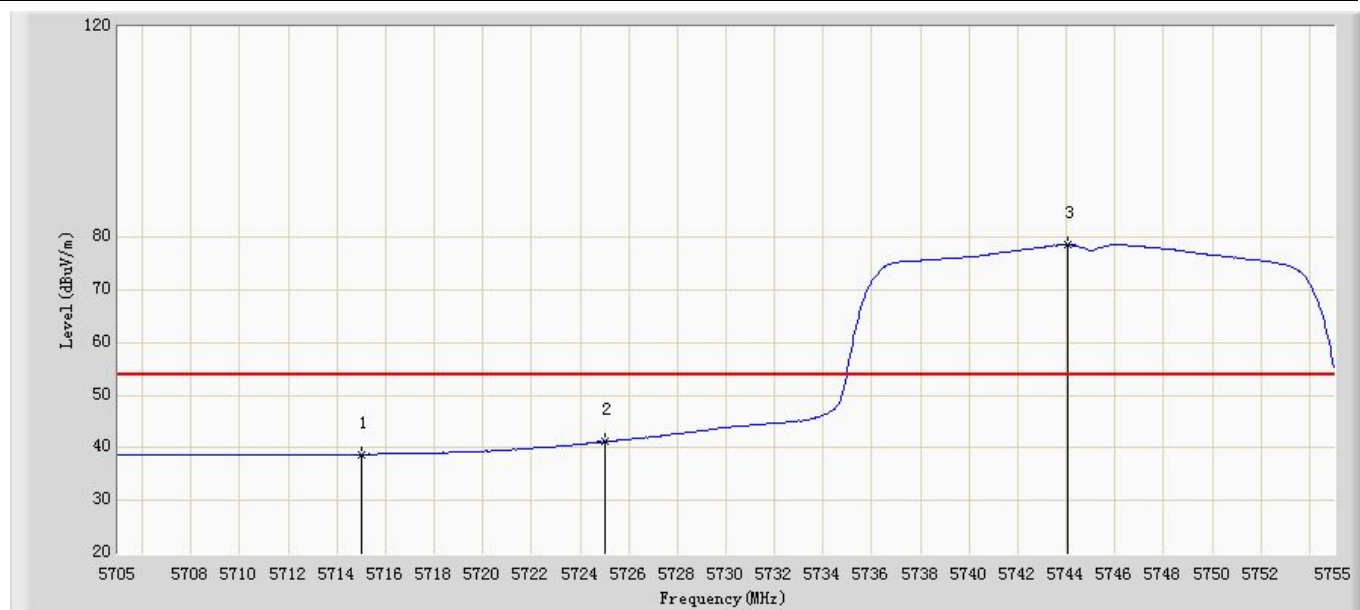

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	38.75	-1.18	-29.45	68.2	39.930	AV
2		5725.000	41.162	1.219	-37.038	78.2	39.943	AV
3	*	5744.050	78.542	38.579	N/A	N/A	39.963	AV




Site: AC102	Time: 2015/07/12 - 19:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant1	

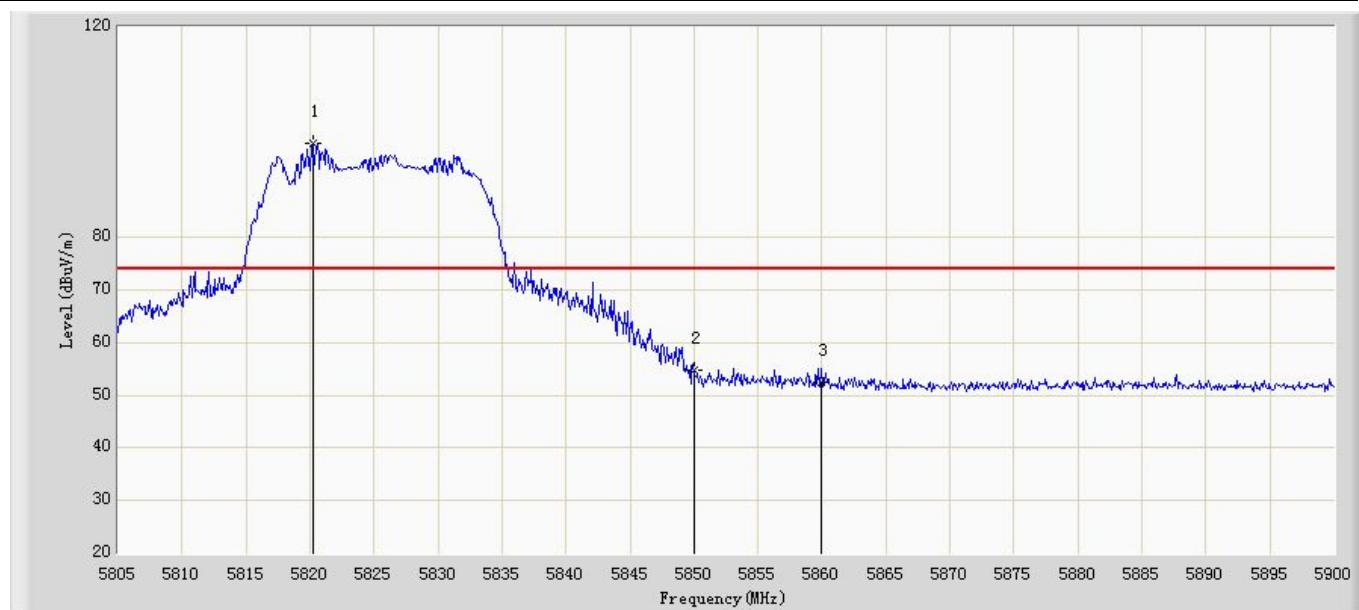

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5820.200	97.837	57.780	N/A	N/A	40.057	PK
2		5850.000	54.717	14.611	-23.483	78.2	40.106	PK
3		5860.000	52.369	12.249	-15.831	68.2	40.120	PK




Site: AC102	Time: 2015/07/12 - 19:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant1	

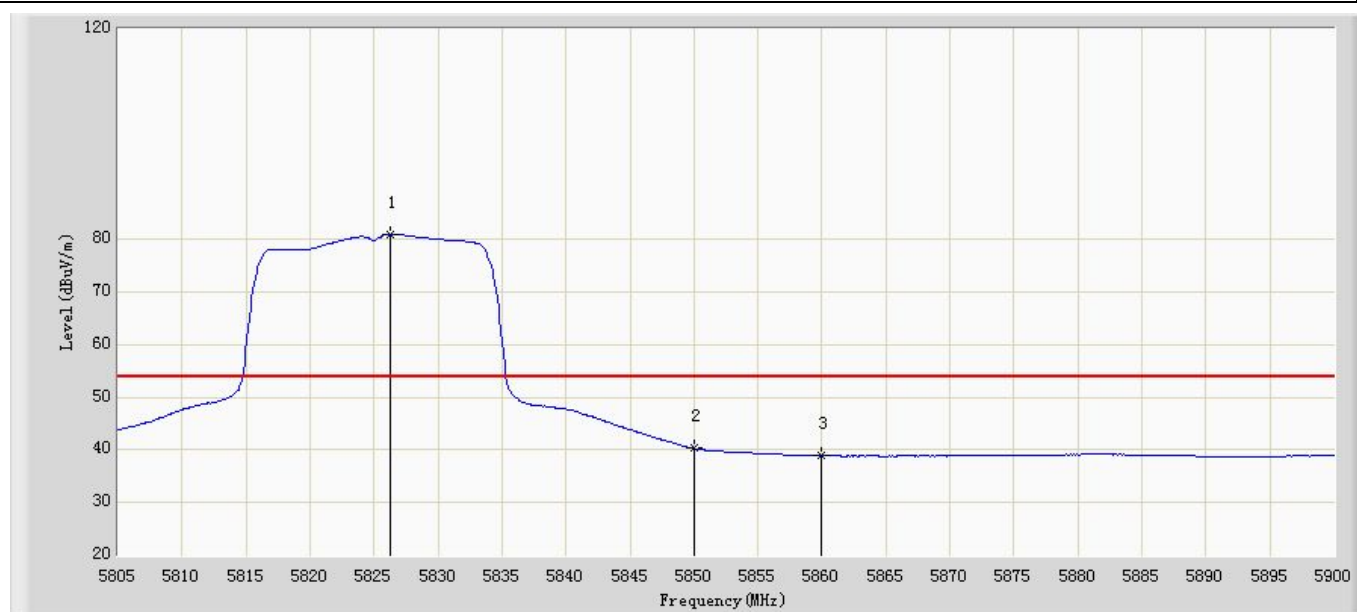

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5826.280	81.006	40.941	N/A	N/A	40.065	AV
2		5850.000	40.299	0.193	-37.901	78.2	40.106	AV
3		5860.000	38.892	-1.228	-29.308	68.2	40.120	AV




Site: AC102	Time: 2015/07/12 - 19:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant1	

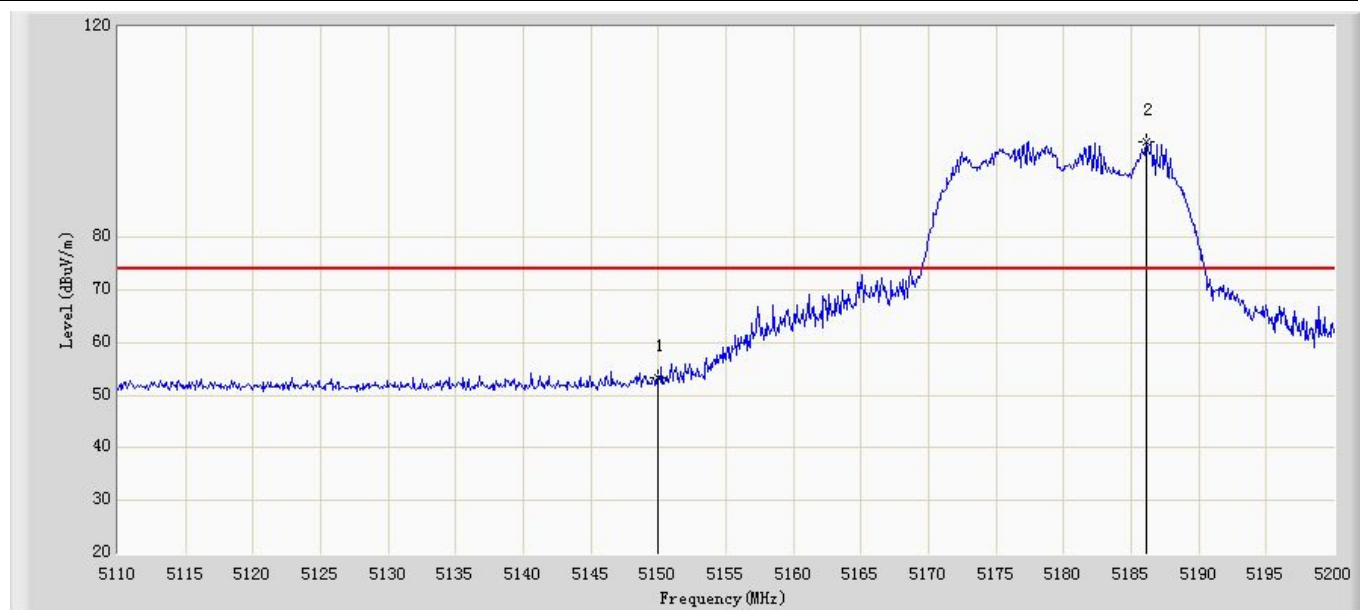

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	53.471	13.824	-20.529	74.000	39.647	PK
2	*	5186.140	98.108	58.469	N/A	N/A	39.639	PK




Site: AC102	Time: 2015/07/12 - 19:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant1	

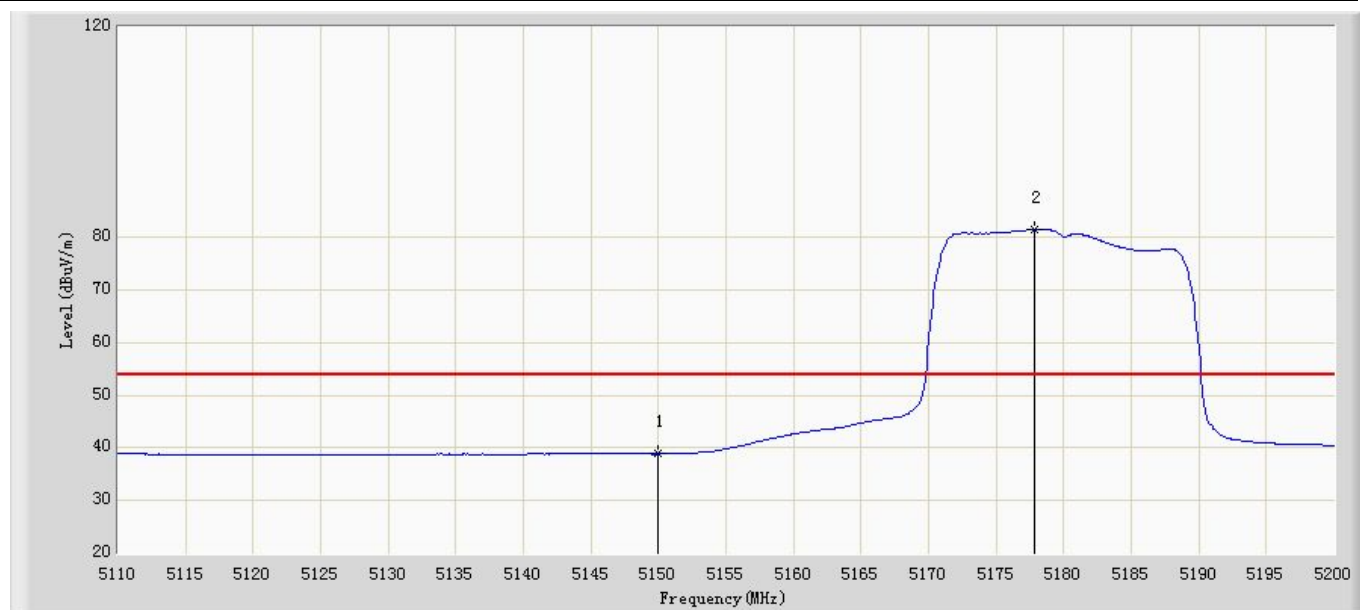

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	38.826	-0.821	-15.174	54.000	39.647	AV
2	*	5177.860	81.473	41.834	N/A	N/A	39.639	AV




Site: AC102	Time: 2015/07/12 - 19:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant1	

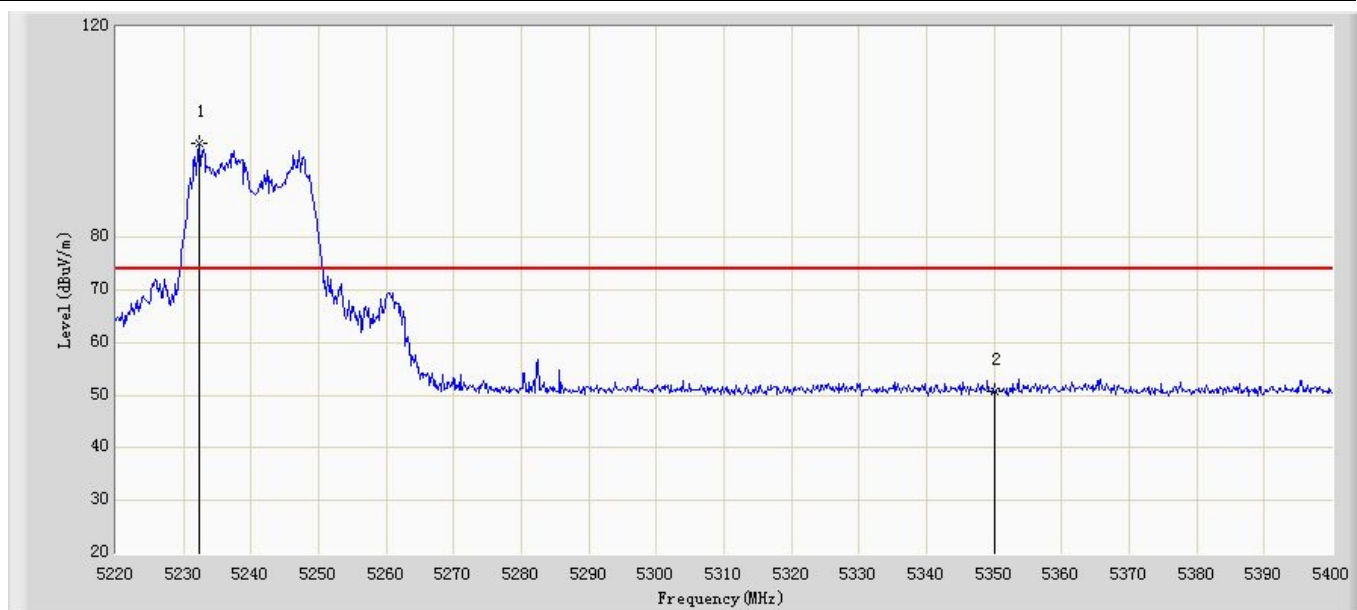

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.420	97.764	58.123	N/A	N/A	39.641	PK
2		5350.000	50.858	11.238	-23.142	74.000	39.620	PK




Site: AC102	Time: 2015/07/12 - 19:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant1	

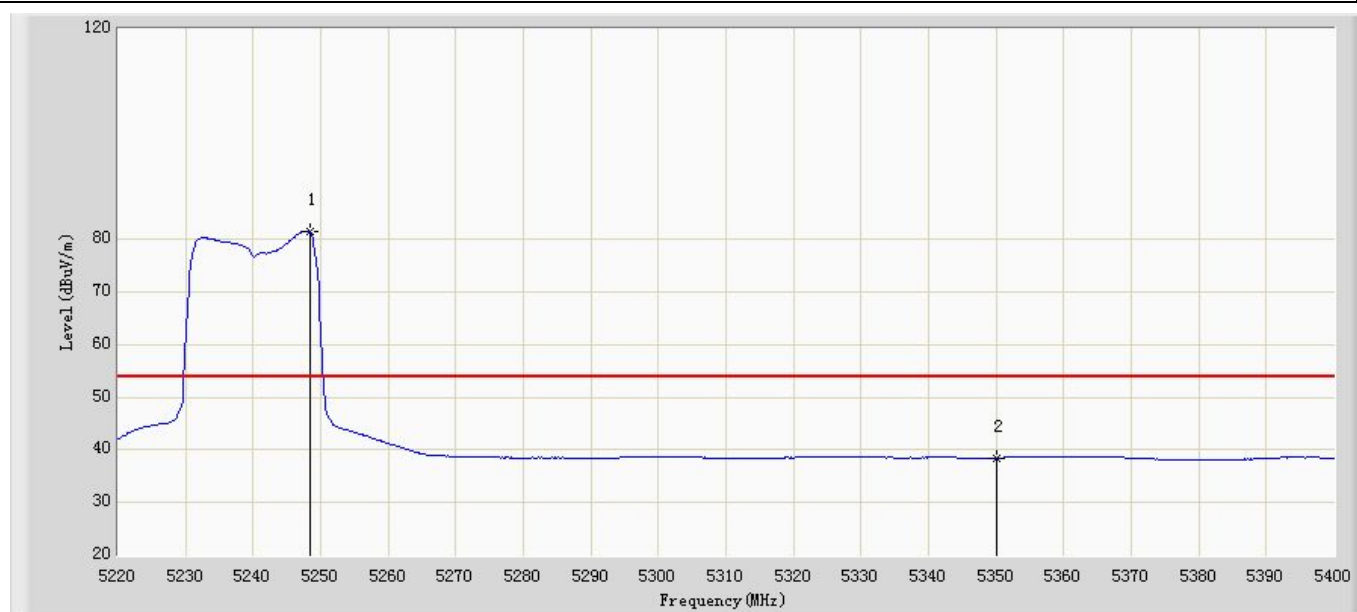

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5248.440	81.352	41.719	N/A	N/A	39.633	AV
2		5350.000	38.449	-1.171	-15.551	54.000	39.620	AV




Site: AC102	Time: 2015/07/12 - 19:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant1	

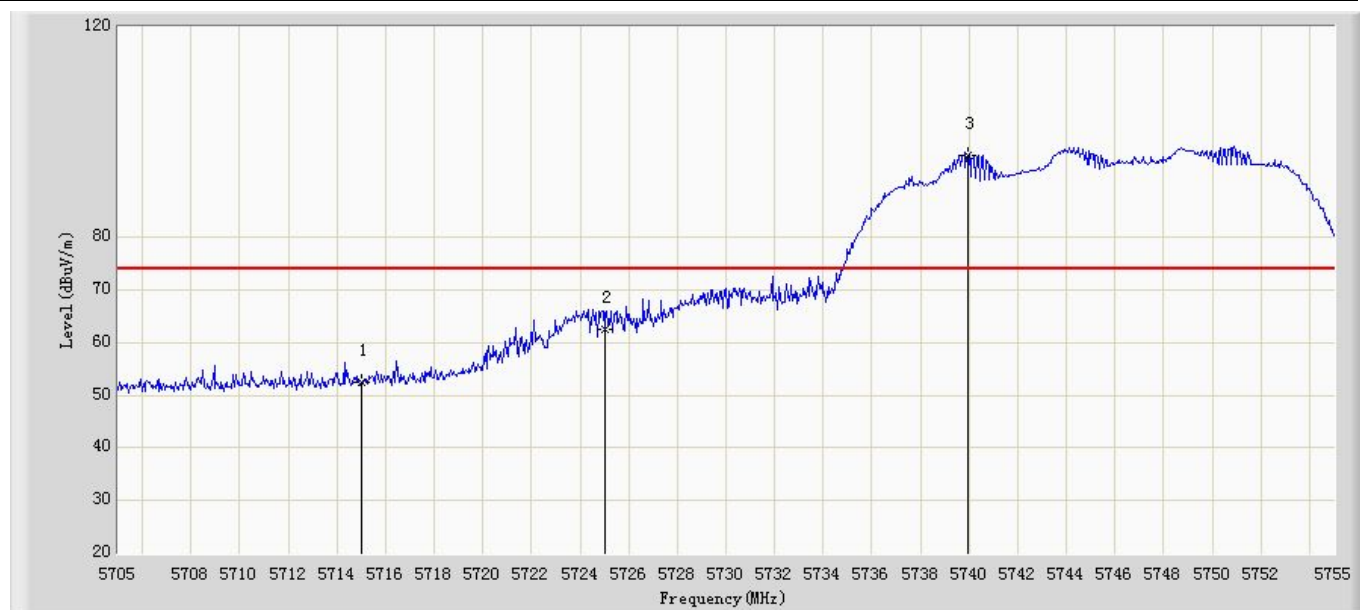

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	52.596	12.666	-15.604	68.2	39.930	PK
2		5725.000	62.574	22.631	-15.626	78.2	39.943	PK
3	*	5739.950	95.675	55.717	N/A	N/A	39.959	PK




Site: AC102	Time: 2015/07/12 - 19:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant1	

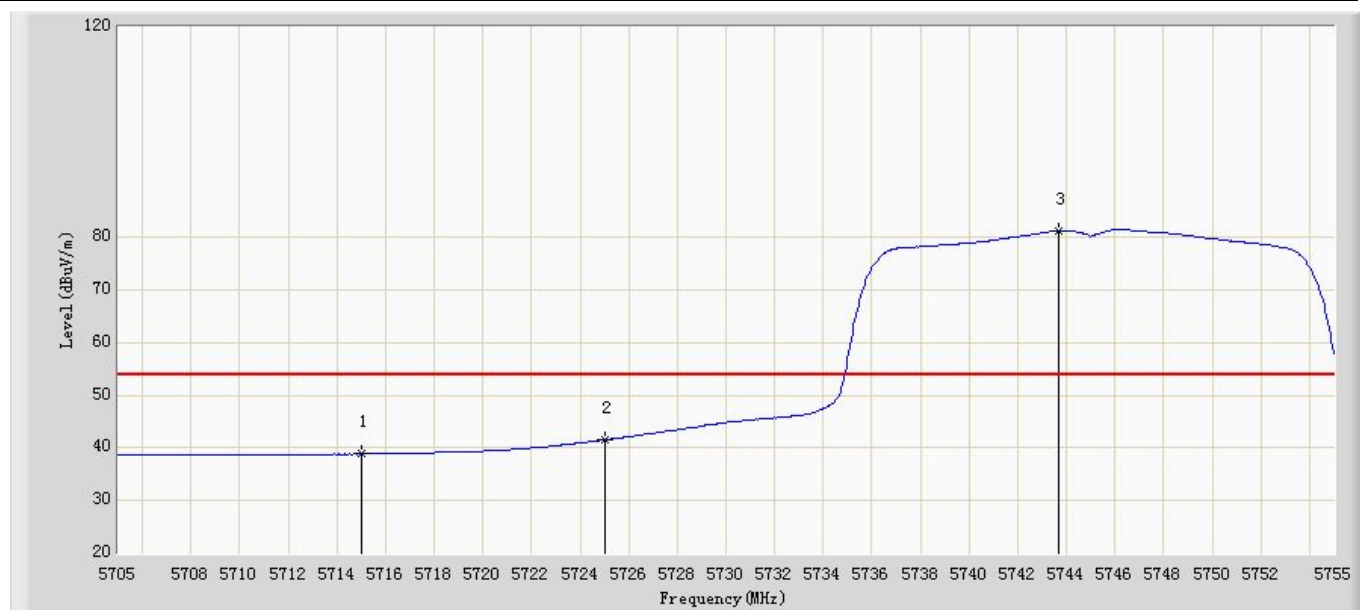

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	38.857	-1.073	-29.343	68.2	39.930	AV
2		5725.000	41.515	1.572	-36.685	78.2	39.943	AV
3	*	5743.700	81.215	41.253	N/A	N/A	39.963	AV




Site: AC102	Time: 2015/07/12 - 19:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant1	

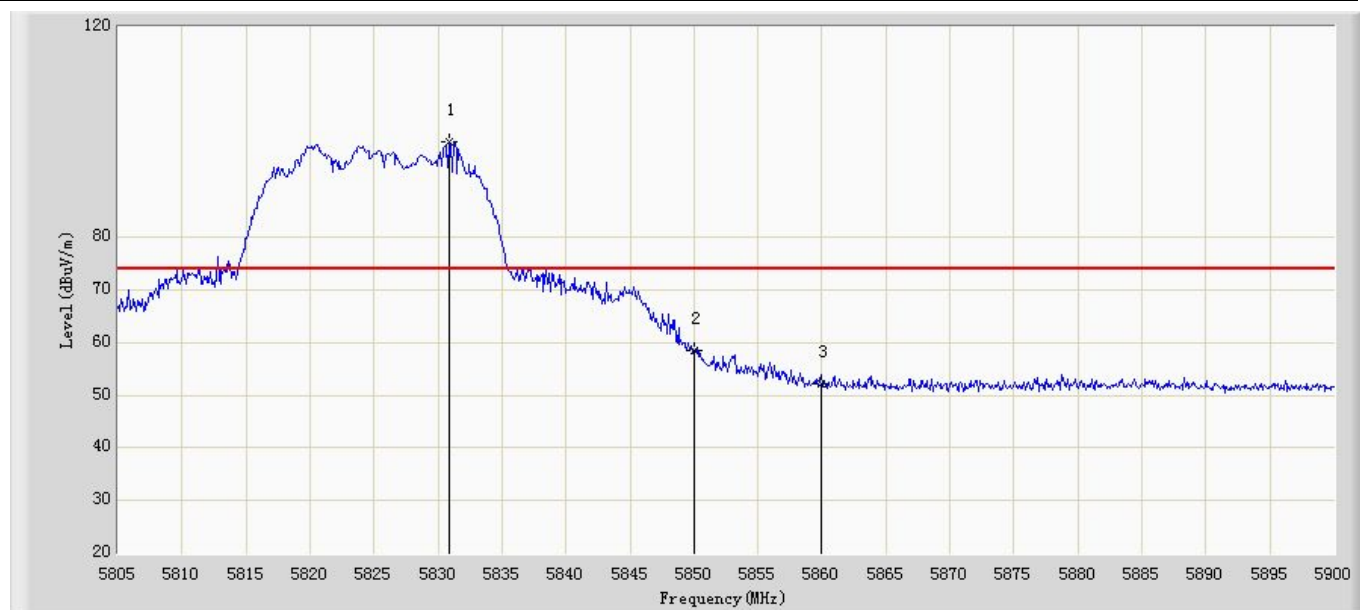

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5830.935	98.123	58.050	N/A	N/A	40.072	PK
2		5850.000	58.387	18.281	-19.813	78.2	40.106	PK
3		5860.000	52.284	12.164	-15.916	68.2	40.120	PK



Site: AC102	Time: 2015/07/12 - 19:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant1	

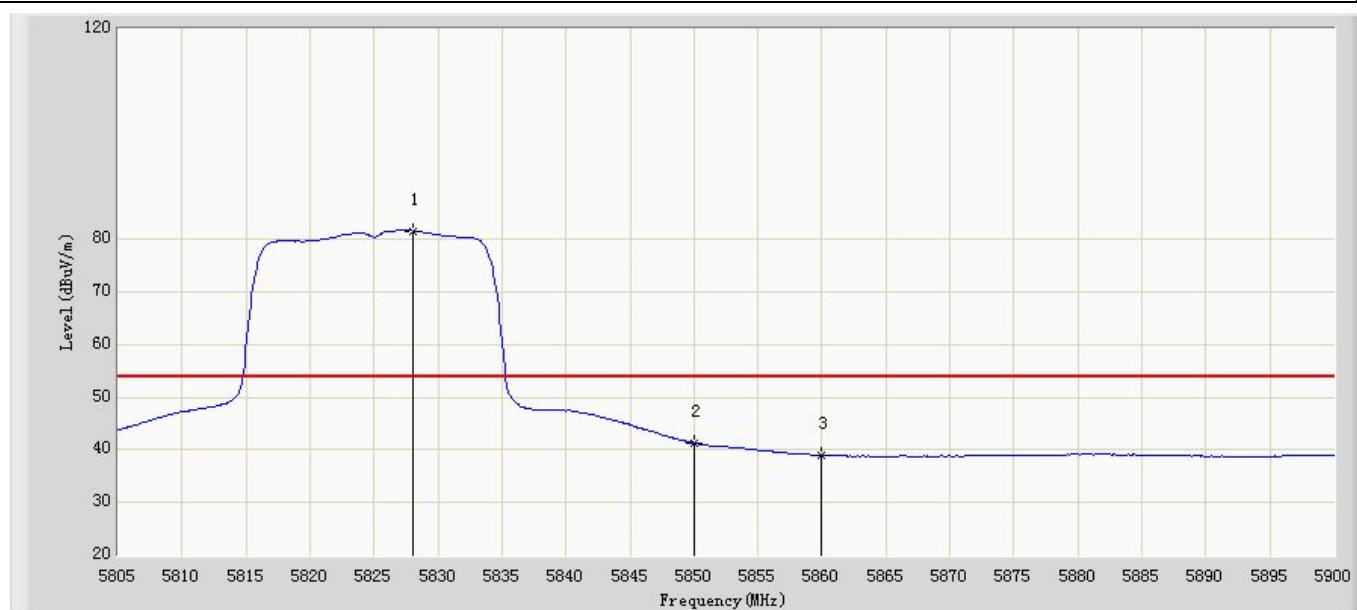

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5827.990	81.627	41.560	N/A	N/A	40.067	AV
2		5850.000	41.282	1.176	-36.918	78.2	40.106	AV
3		5860.000	38.932	-1.188	-29.268	68.2	40.120	AV




Site: AC102	Time: 2015/07/12 - 19:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant1	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5146.900	60.078	20.430	-13.922	74.000	39.648	PK
2		5150.000	56.296	16.649	-17.704	74.000	39.647	PK
3	*	5177.500	93.068	53.429	N/A	N/A	39.640	PK




Site: AC102	Time: 2015/07/12 - 19:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant1	

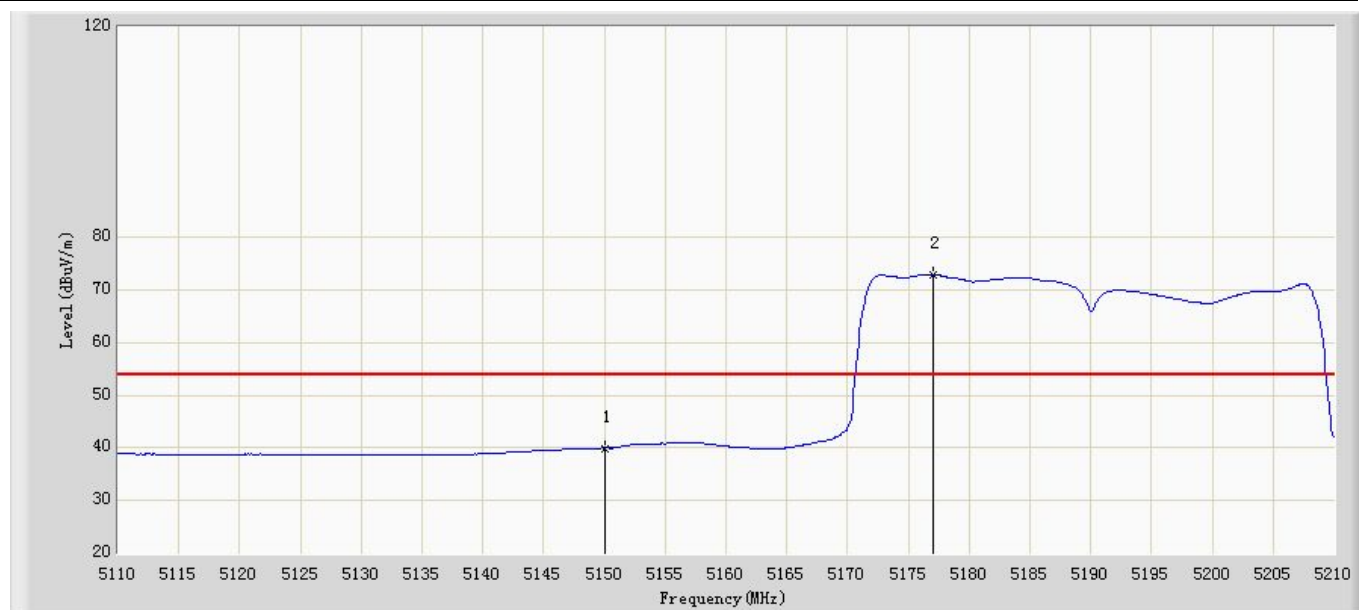

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	39.970	0.323	-14.030	54.000	39.647	AV
2	*	5177.000	72.835	33.196	N/A	N/A	39.639	AV




Site: AC102	Time: 2015/07/12 - 19:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant1	

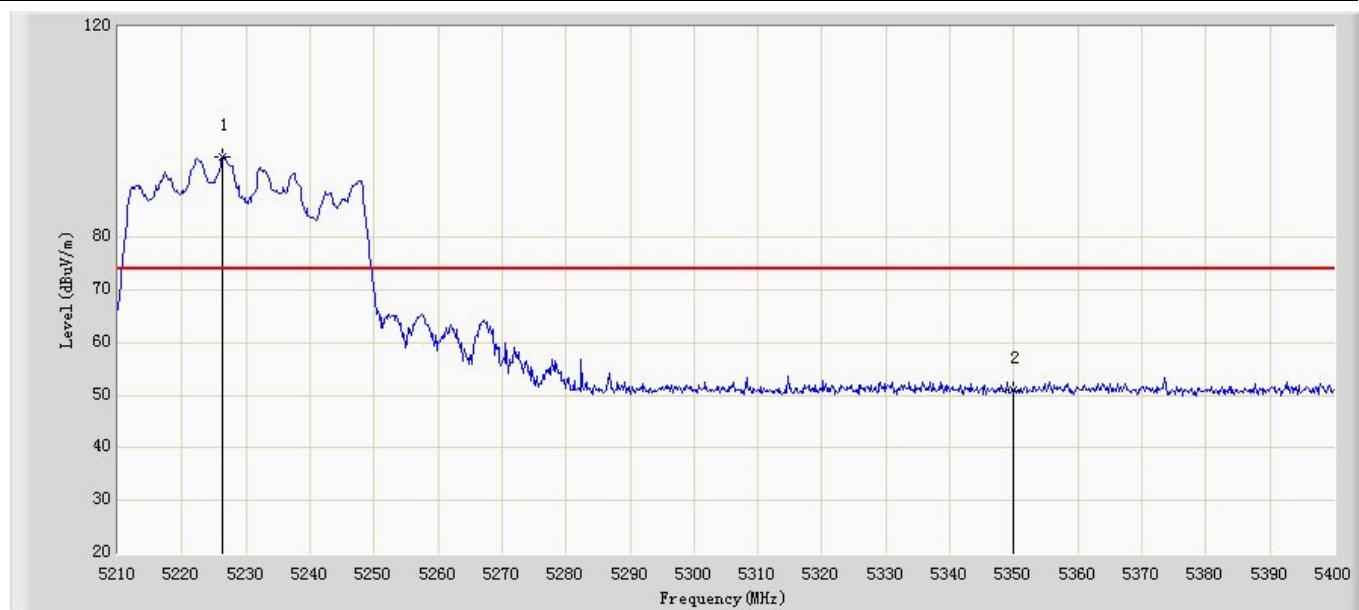

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5226.340	95.415	55.774	N/A	N/A	39.641	PK
2		5350.000	51.043	11.423	-22.957	74.000	39.620	PK



Site: AC102	Time: 2015/07/12 - 19:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant1	

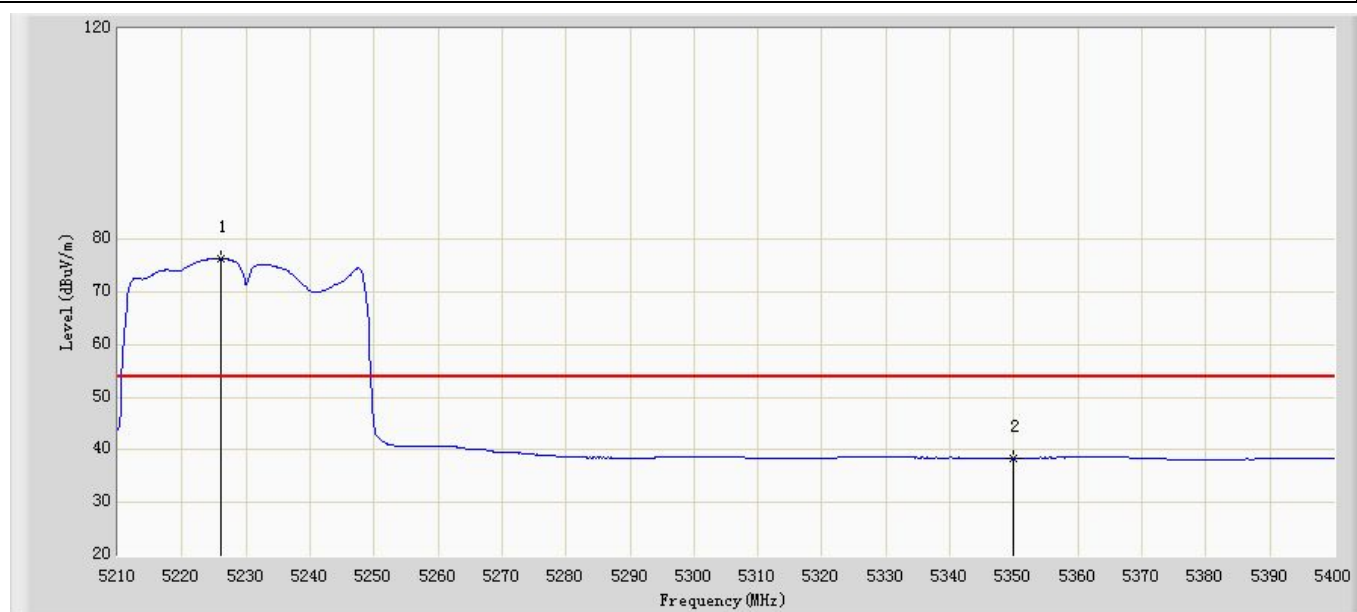

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5225.960	76.410	36.769	N/A	N/A	39.641	AV
2		5350.000	38.311	-1.309	-15.689	54.000	39.620	AV




Site: AC102	Time: 2015/07/12 - 19:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant1	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	56.713	16.783	-11.487	68.2	39.930	PK
2		5725.000	60.553	20.61	-17.647	78.2	39.943	PK
3	*	5750.100	94.775	54.806	N/A	N/A	39.970	PK




Site: AC102	Time: 2015/07/12 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant1	

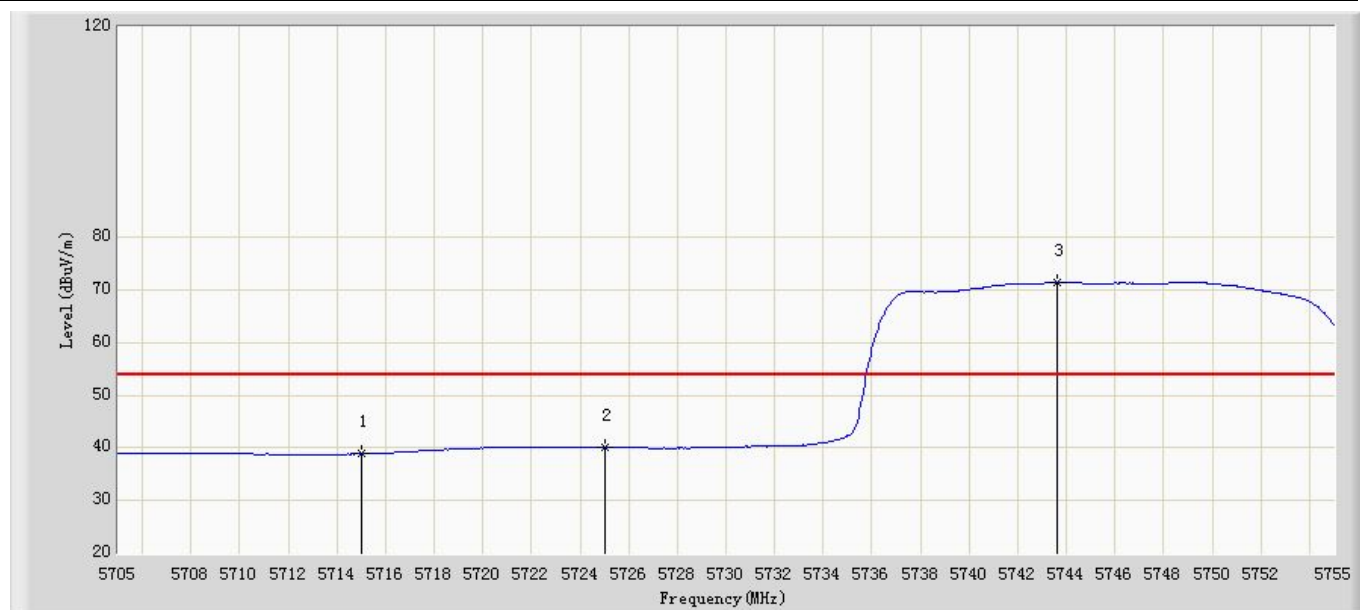

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	38.895	-1.035	-29.305	68.2	39.930	AV
2		5725.000	40.076	0.133	-38.124	78.2	39.943	AV
3	*	5743.650	71.432	31.470	N/A	N/A	39.963	AV




Site: AC102	Time: 2015/07/12 - 19:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant1	

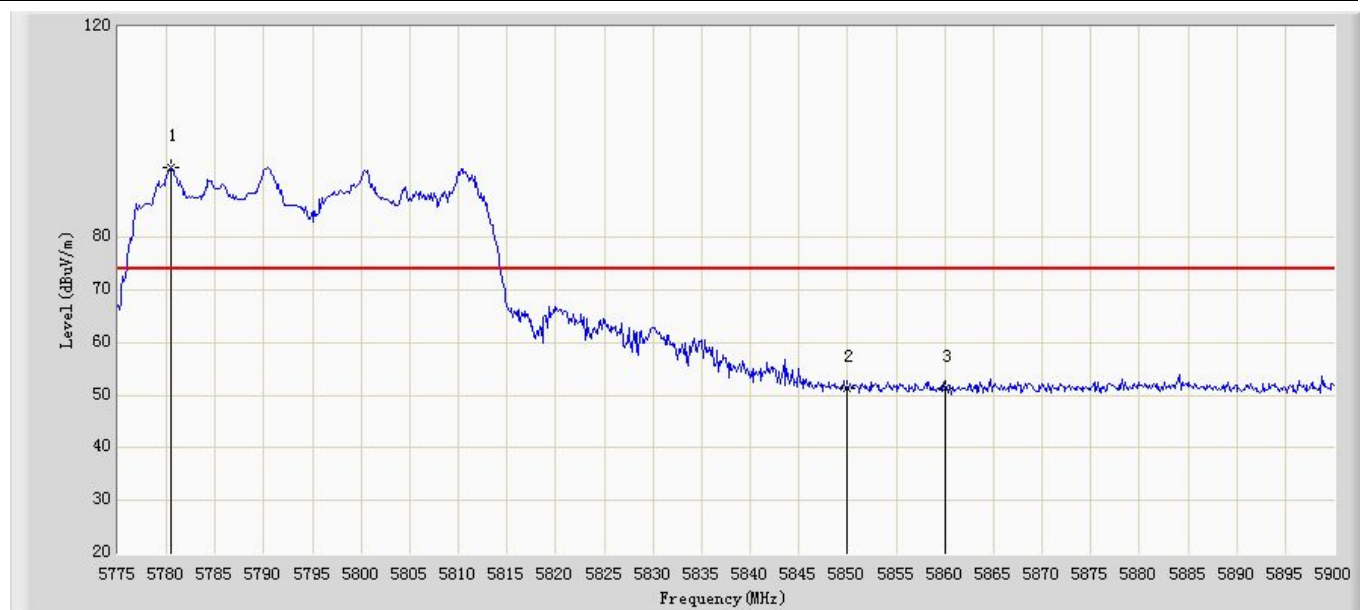

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5780.500	93.169	53.163	N/A	N/A	40.007	PK
2		5850.000	51.296	11.19	-26.904	78.2	40.106	PK
3		5860.000	51.437	11.317	-16.763	68.2	40.120	PK




Site: AC102	Time: 2015/07/12 - 19:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant1	

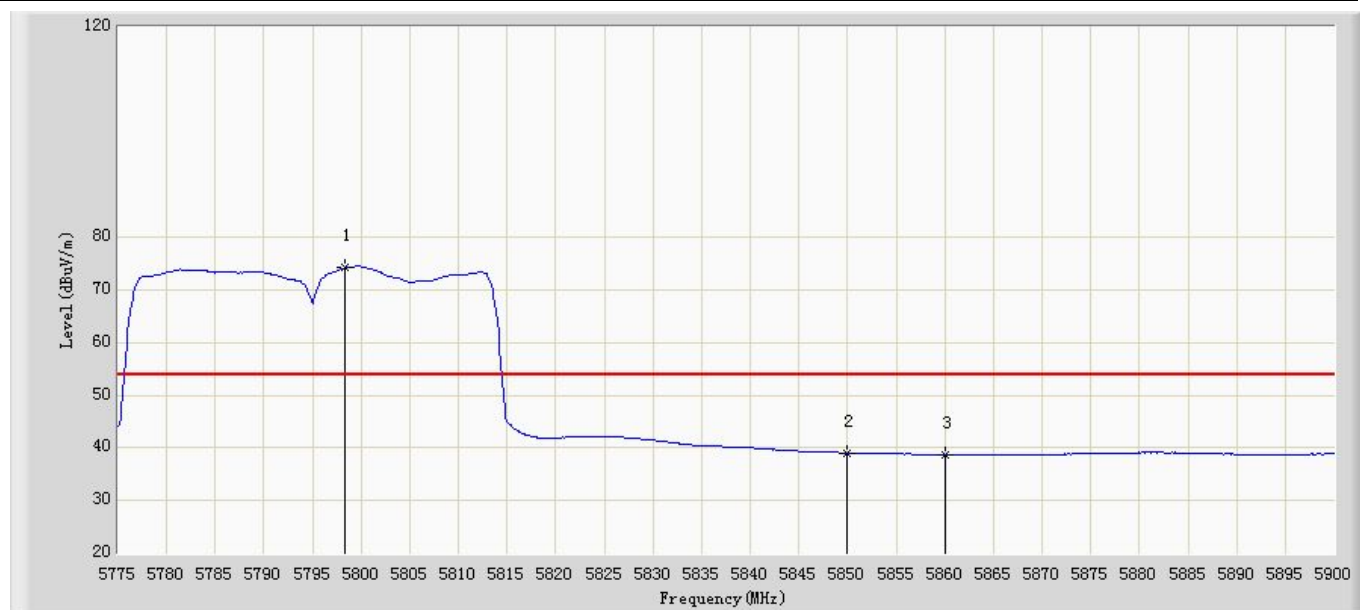

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5798.375	74.261	34.229	N/A	N/A	40.032	AV
2		5850.000	39.019	-1.087	-39.181	78.2	40.106	AV
3		5860.000	38.716	-1.404	-29.484	68.2	40.120	AV




Site: AC102	Time: 2015/07/12 - 19:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5210 by 802.11ac(40MHz) Ant1	

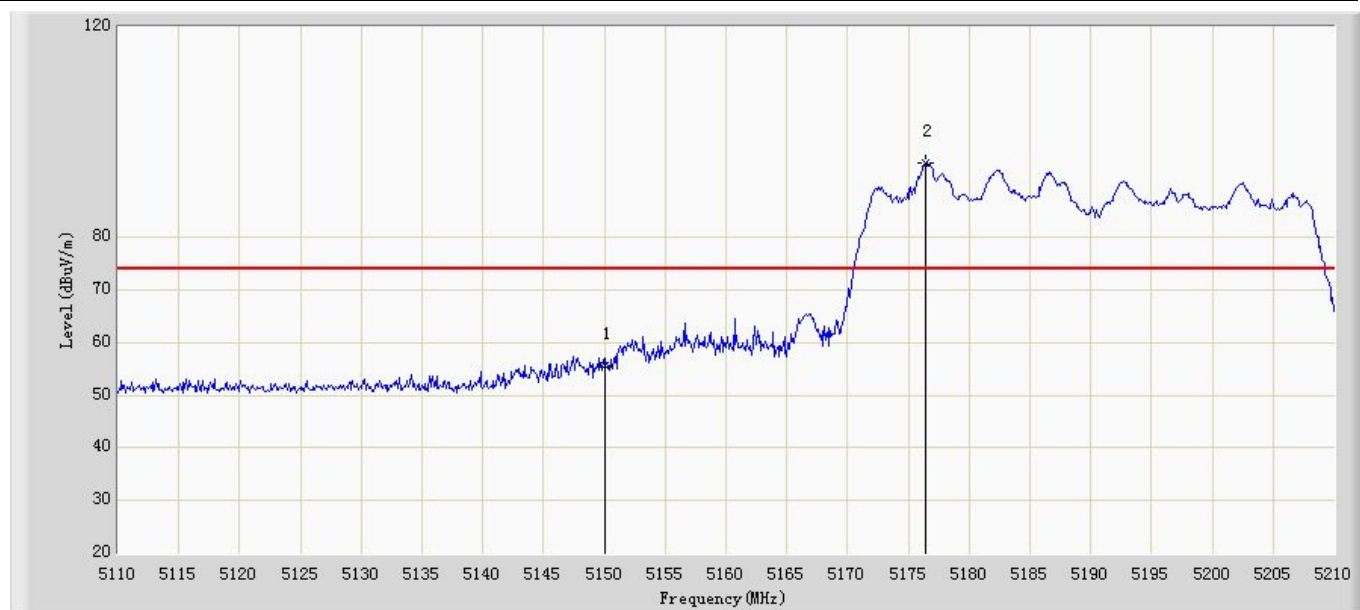

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	55.564	15.917	-18.436	74.000	39.647	PK
2	*	5176.400	94.149	54.509	N/A	N/A	39.640	PK




Site: AC102	Time: 2015/07/12 - 19:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5210 by 802.11ac(40MHz) Ant1	

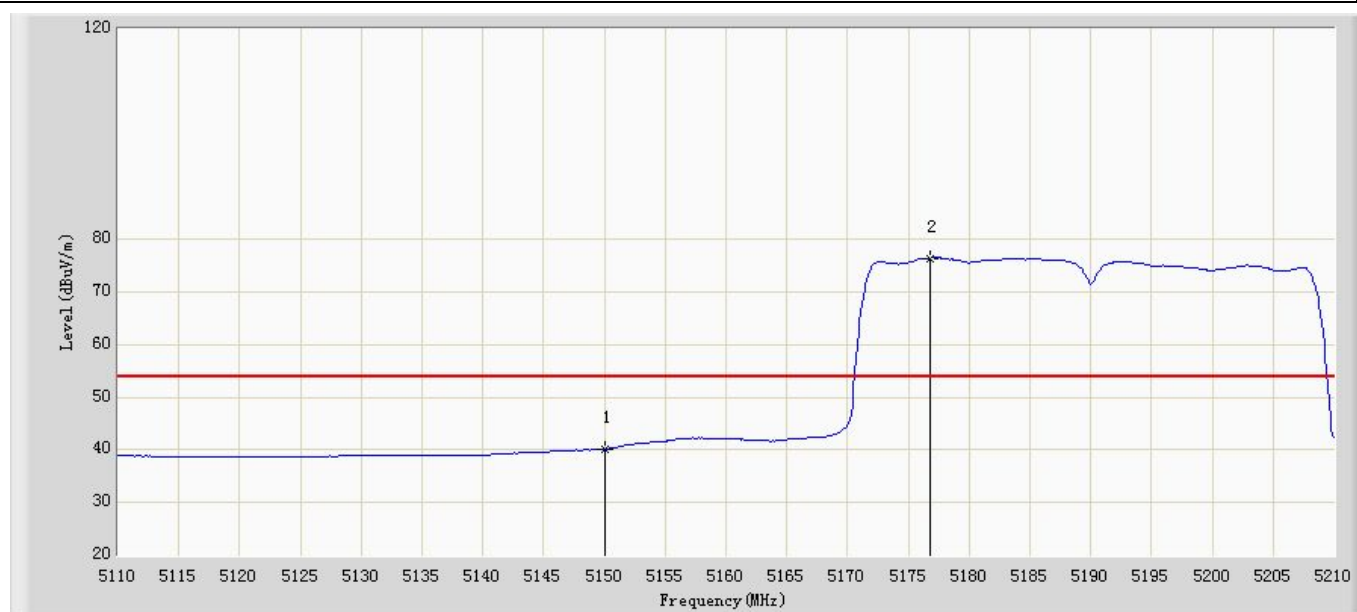

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.172	0.525	-13.828	54.000	39.647	AV
2	*	5176.800	76.411	36.771	N/A	N/A	39.639	AV




Site: AC102	Time: 2015/07/12 - 19:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant1	

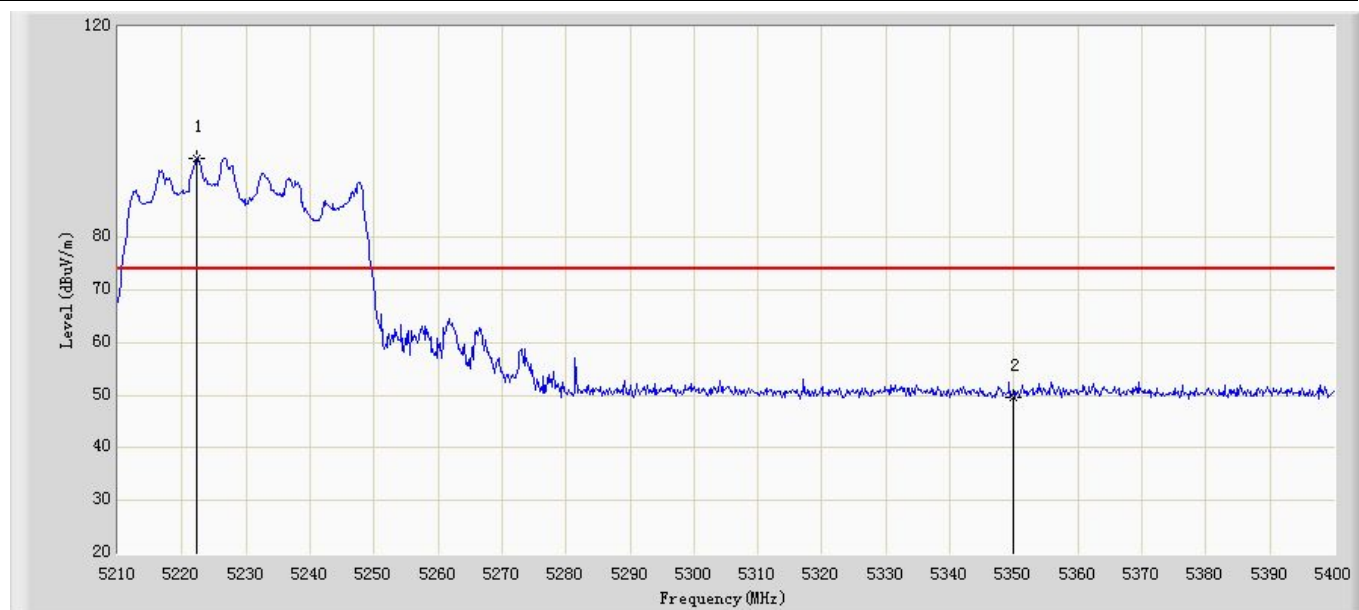

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.350	94.881	55.239	N/A	N/A	39.642	PK
2		5350.000	49.632	10.012	-24.368	74.000	39.620	PK




Site: AC102	Time: 2015/07/12 - 19:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant1	

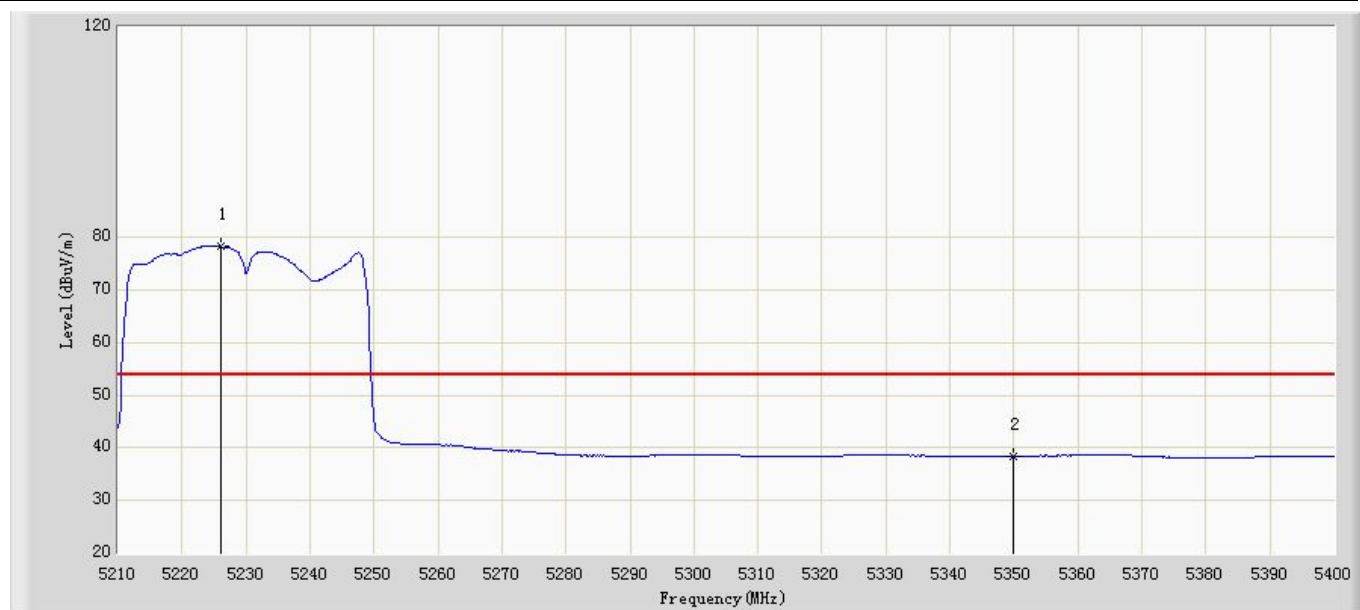

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5225.960	78.268	38.627	N/A	N/A	39.641	AV
2		5350.000	38.290	-1.330	-15.710	54.000	39.620	AV




Site: AC102	Time: 2015/07/12 - 19:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant1	

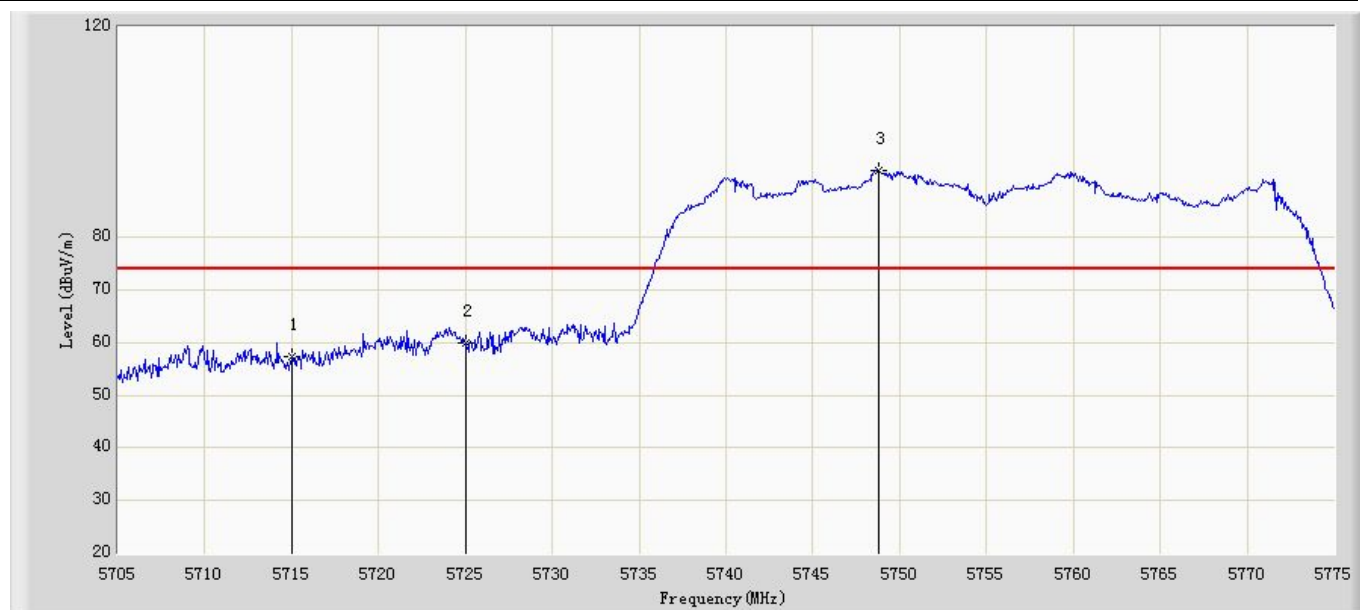

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	57.23	17.3	-10.97	68.2	39.930	PK
2		5725.000	59.973	20.03	-18.227	78.2	39.943	PK
3	*	5748.750	92.827	52.859	N/A	N/A	39.968	PK




Site: AC102	Time: 2015/07/12 - 19:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant1	

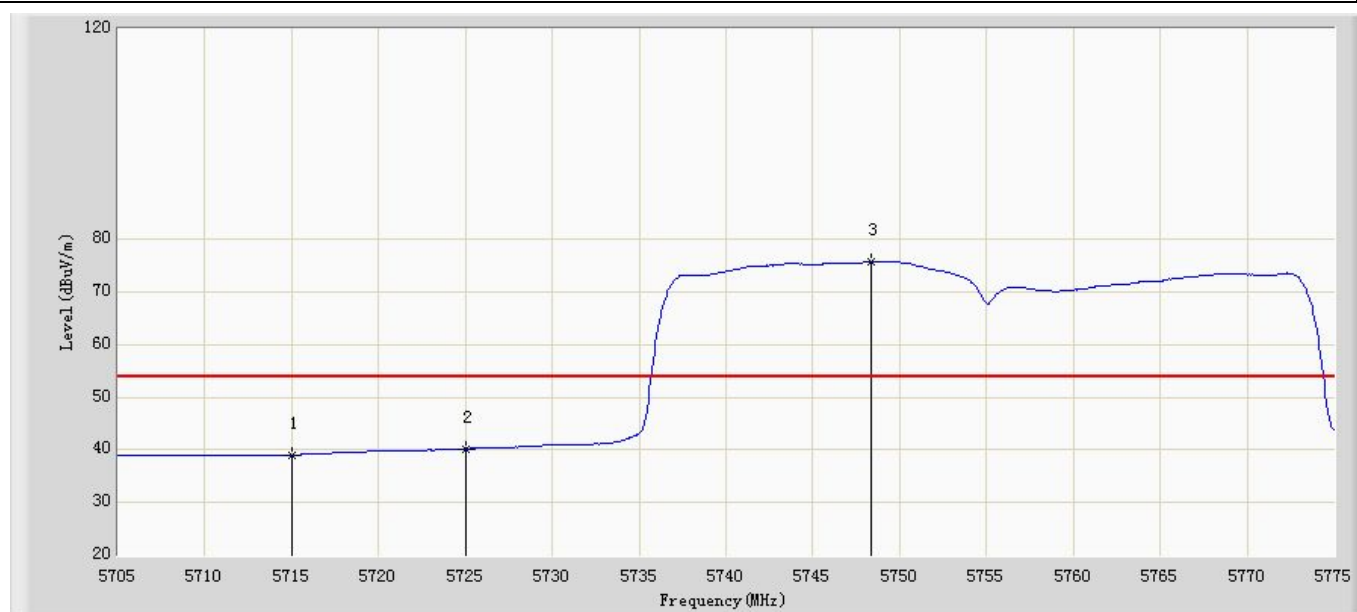

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.05	-0.88	-29.15	68.2	39.930	AV
2		5725.000	40.254	0.311	-37.946	78.2	39.943	AV
3	*	5748.330	75.760	35.792	N/A	N/A	39.967	AV




Site: AC102	Time: 2015/07/12 - 19:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant1	

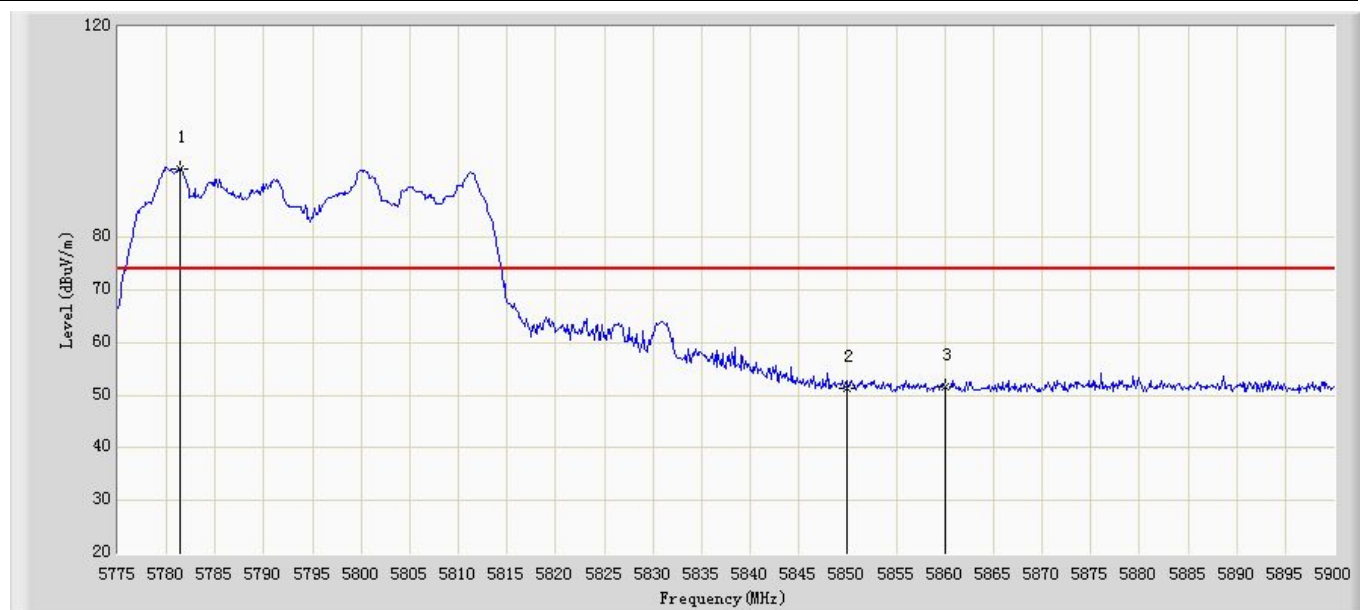

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5781.375	92.906	52.898	N/A	N/A	40.007	PK
2		5850.000	51.268	11.162	-26.932	78.2	40.106	PK
3		5860.000	51.638	11.518	-16.562	68.2	40.120	PK



Site: AC102	Time: 2015/07/12 - 19:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant1	

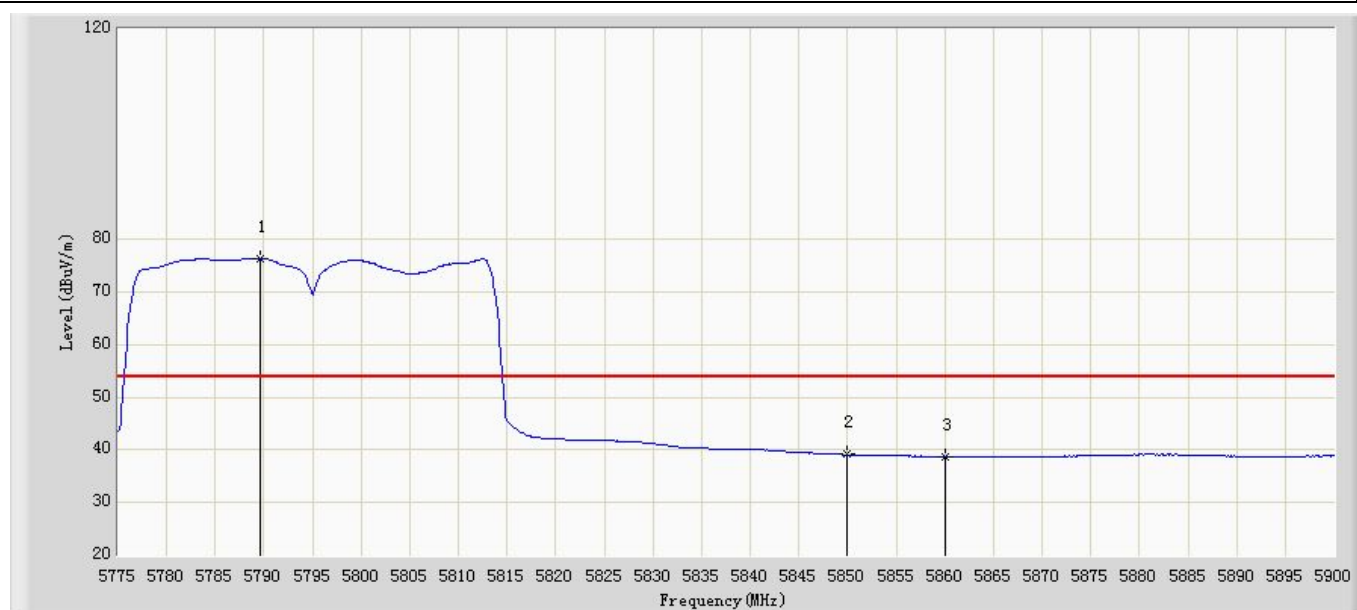

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5789.625	76.387	36.366	N/A	N/A	40.021	AV
2		5850.000	39.120	-0.986	-39.08	78.2	40.106	AV
3		5860.000	38.688	-1.432	-29.512	68.2	40.120	AV




Site: AC102	Time: 2015/07/12 - 19:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant1	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	57.339	17.692	-16.661	74.000	39.647	PK
2	*	5221.300	92.962	53.320	N/A	N/A	39.642	PK




Site: AC102	Time: 2015/07/12 - 19:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant1	

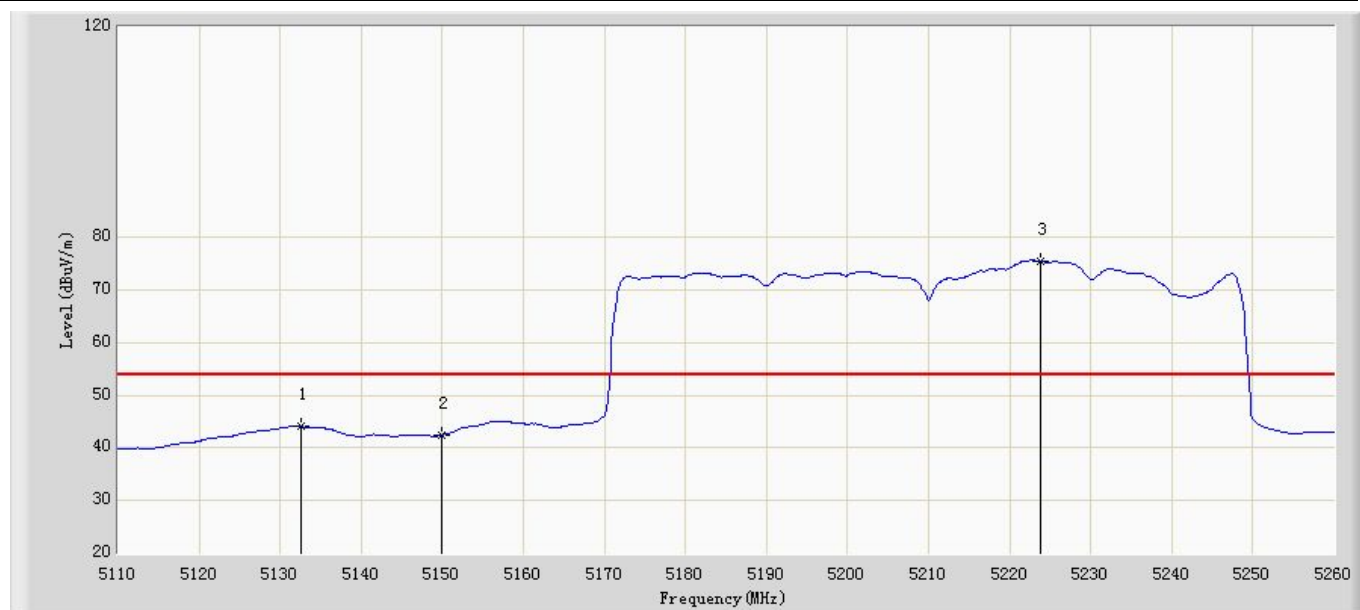

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5132.500	44.097	4.448	-9.903	54.000	39.650	AV
2		5150.000	42.412	2.765	-11.588	54.000	39.647	AV
3	*	5223.850	75.468	35.826	N/A	N/A	39.642	AV




Site: AC102	Time: 2015/07/12 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant1	

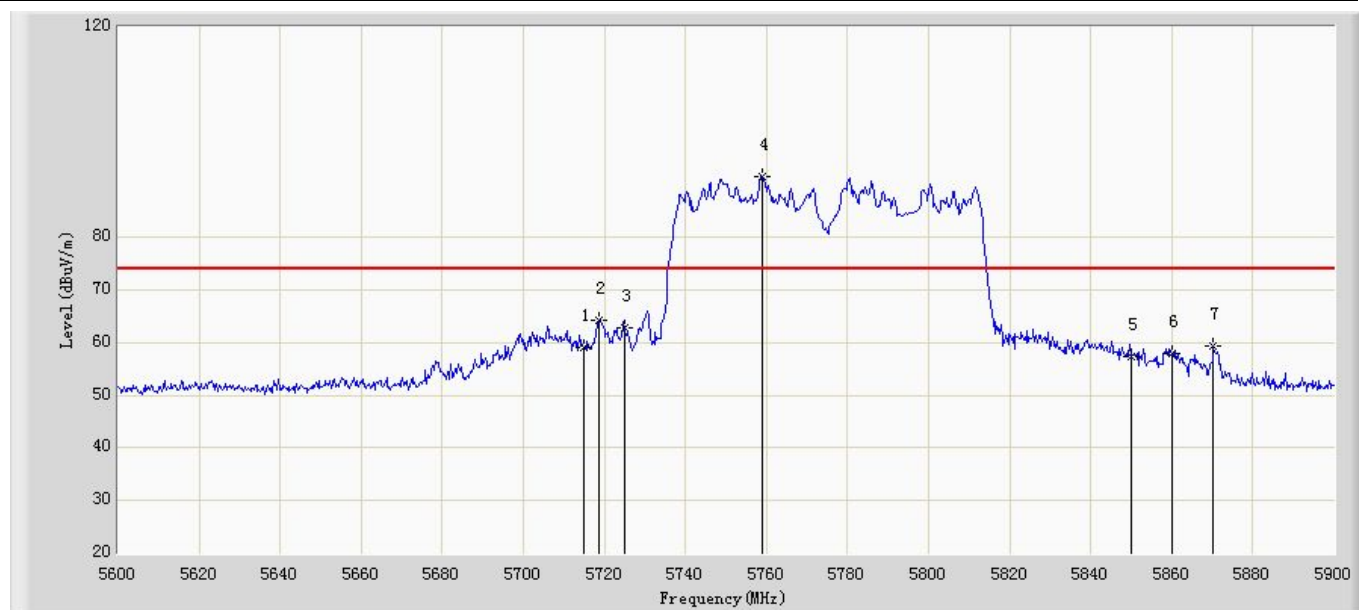

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	58.979	19.049	-9.221	68.2	39.930	PK
2		5718.500	64.395	24.46	-13.805	78.2	39.935	PK
3		5725.000	62.902	22.959	-15.298	78.2	39.943	PK
4	*	5759.000	91.644	51.665	N/A	N/A	39.979	PK
5		5850.000	57.35	17.244	-20.85	78.2	40.106	PK
6		5860.000	57.892	17.772	-10.308	68.2	40.120	PK
7		5870.300	59.305	19.17	-8.895	68.2	40.135	PK




Site: AC102	Time: 2015/07/12 - 19:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant1	

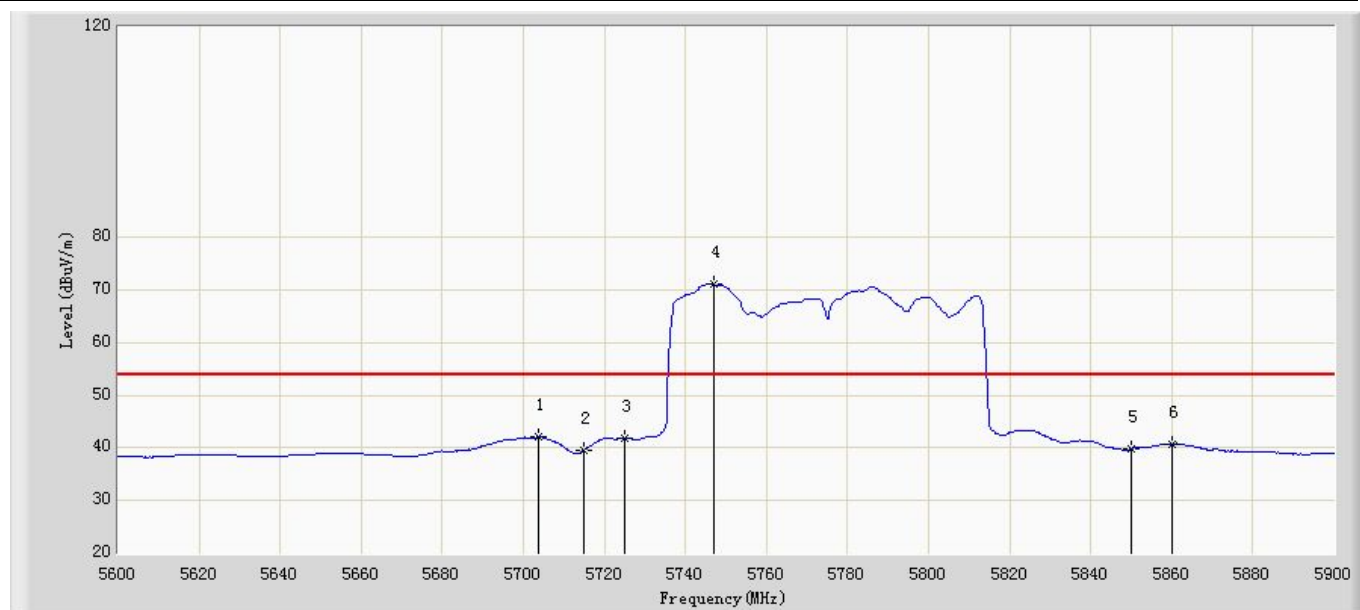

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5703.800	42.036	2.125	-26.164	68.2	39.911	AV
2		5715.000	39.610	-0.320	-28.59	68.2	39.930	AV
3		5725.000	41.756	1.813	-36.444	78.2	39.943	AV
4	*	5747.000	71.145	31.179	N/A	N/A	39.966	AV
5		5850.000	39.794	-0.312	-38.406	78.2	40.106	AV
6		5860.000	40.723	0.603	-27.477	68.2	40.120	AV




Site: AC102	Time: 2015/07/13 - 09:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant0+1	

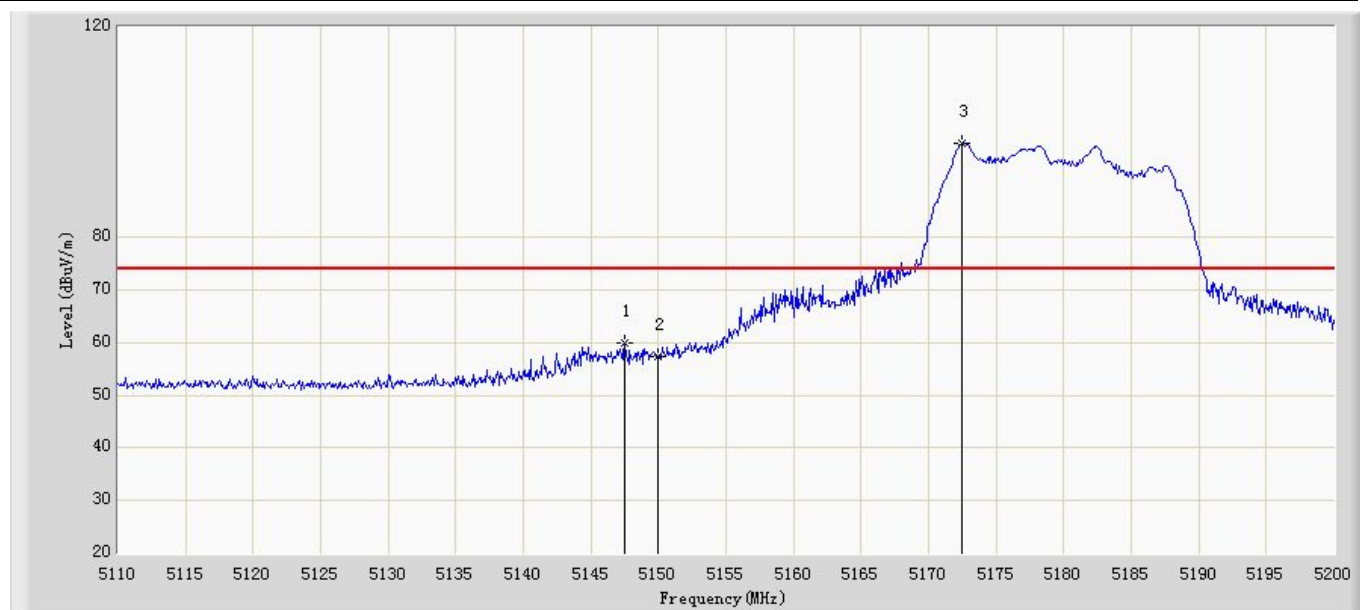

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.530	59.947	20.299	-14.053	74.000	39.648	PK
2		5150.000	57.405	17.758	-16.595	74.000	39.647	PK
3	*	5172.460	97.875	58.235	N/A	N/A	39.641	PK




Site: AC102	Time: 2015/07/13 - 09:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5180 by 802.11n(20MHz) Ant0+1	

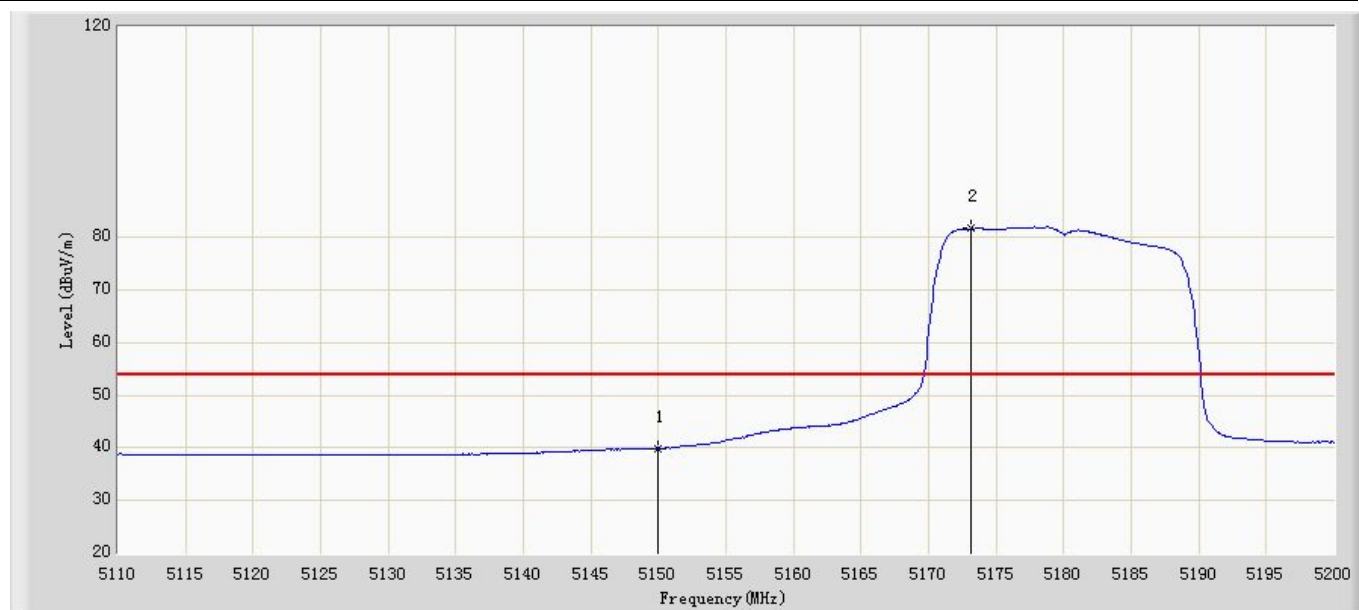

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	39.942	0.295	-14.058	54.000	39.647	AV
2	*	5173.180	81.650	42.010	N/A	N/A	39.640	AV




Site: AC102	Time: 2015/07/13 - 09:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant0+1	

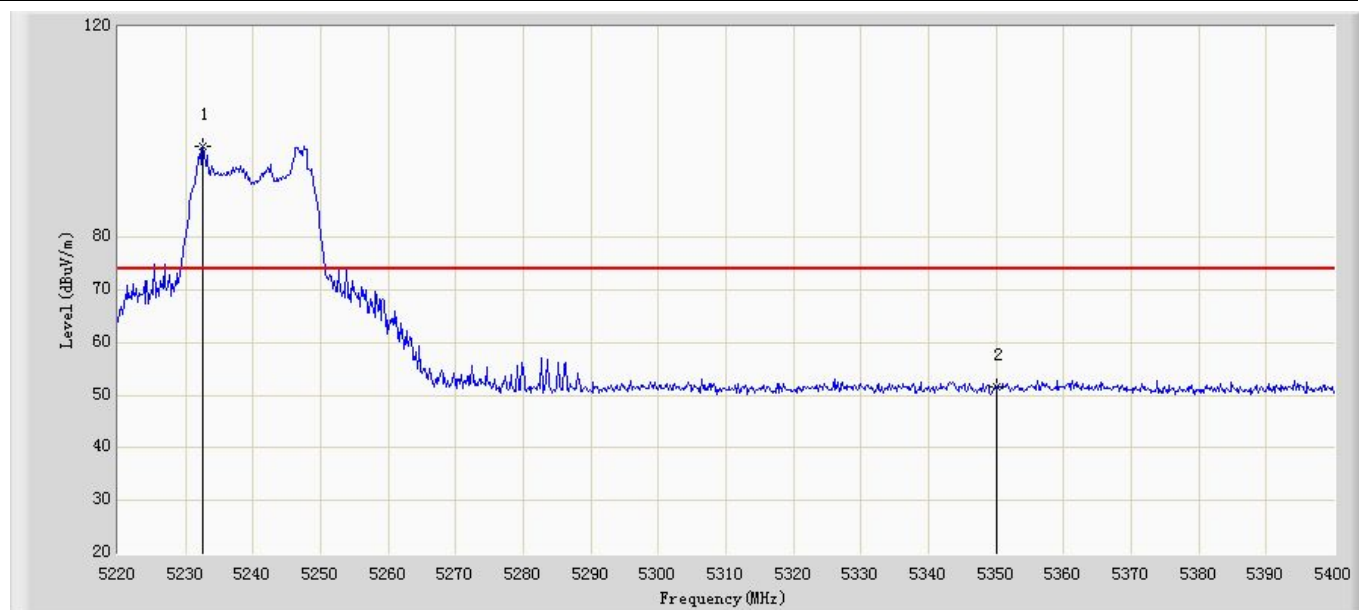

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5232.600	97.226	57.585	N/A	N/A	39.641	PK
2		5350.000	51.508	11.888	-22.492	74.000	39.620	PK




Site: AC102	Time: 2015/07/13 - 09:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5240 by 802.11n(20MHz) Ant0+1	

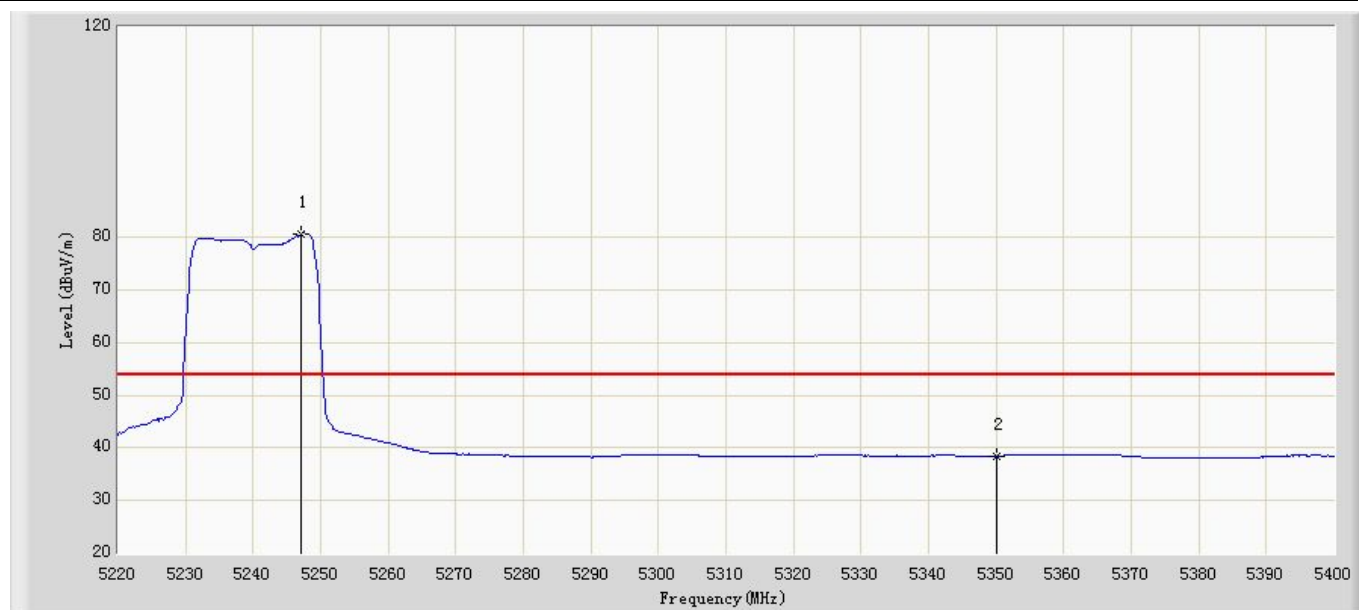

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5247.180	80.768	41.134	N/A	N/A	39.633	AV
2		5350.000	38.435	-1.185	-15.565	54.000	39.620	AV




Site: AC102	Time: 2015/07/13 - 09:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant0+1	

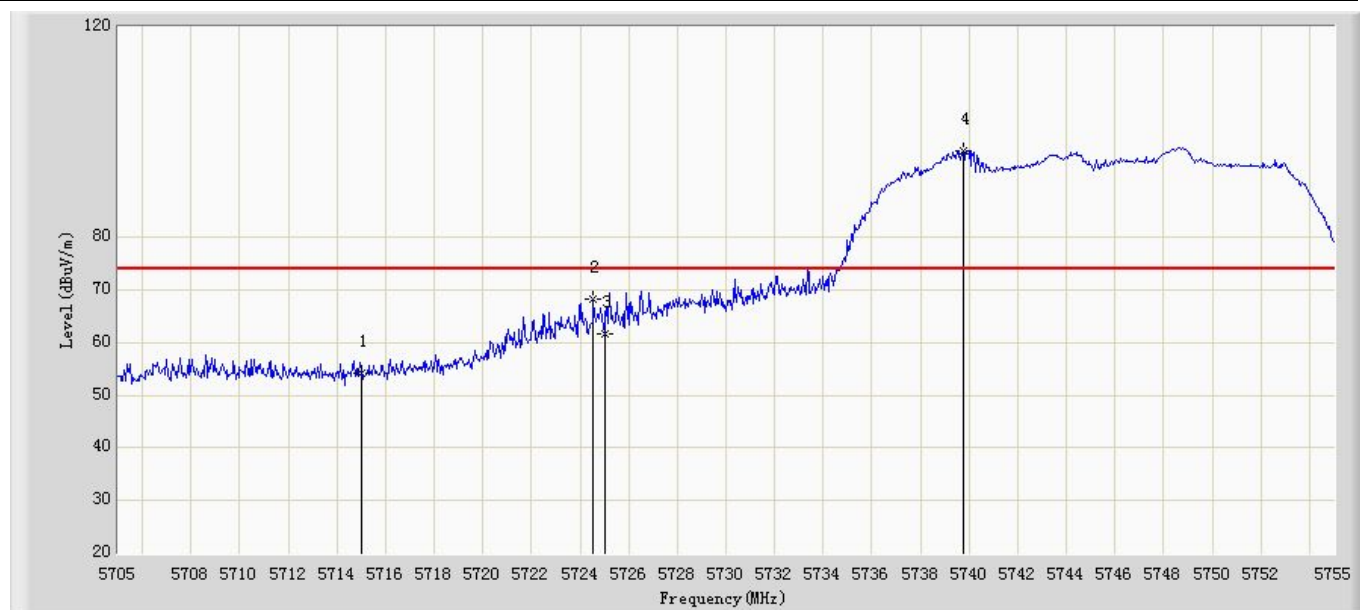

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	54.33	14.4	-13.87	68.2	39.930	PK
2		5724.550	68.229	28.287	-9.971	78.2	39.942	PK
3		5725.000	61.748	21.805	-16.452	78.2	39.943	PK
4	*	5739.750	96.357	56.399	N/A	N/A	39.959	PK




Site: AC102	Time: 2015/07/13 - 09:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5745 by 802.11n(20MHz) Ant0+1	

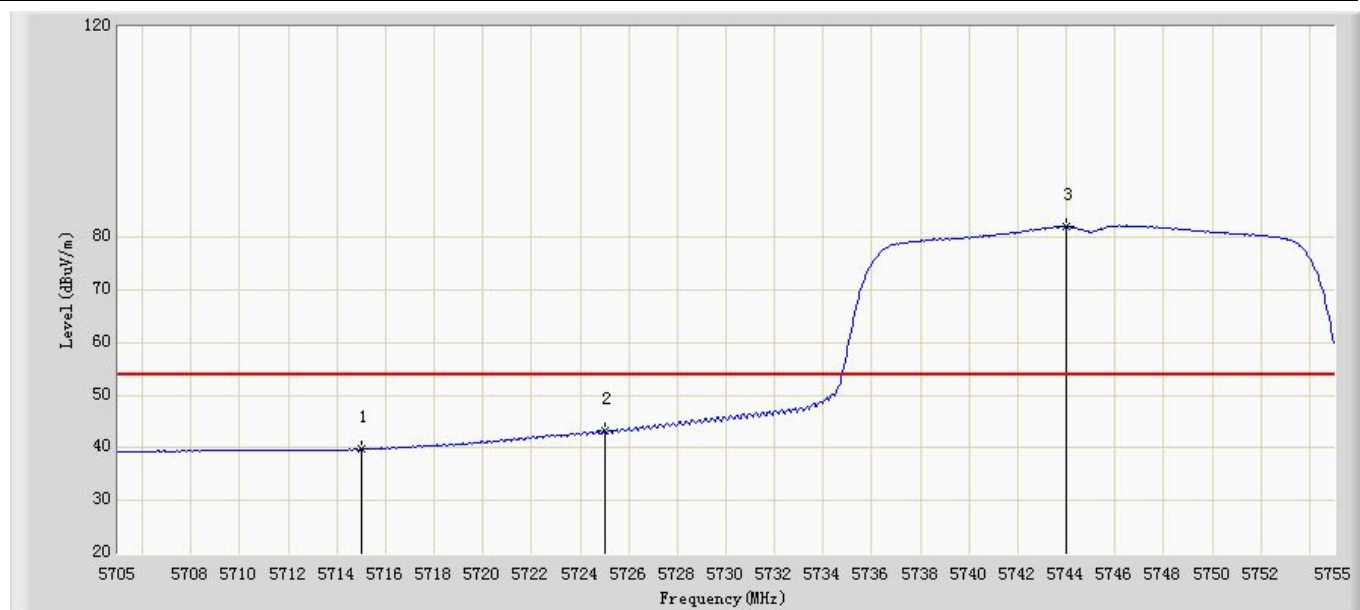

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.788	-0.142	-28.412	68.2	39.930	AV
2		5725.000	43.212	3.269	-34.988	78.2	39.943	AV
3	*	5744.000	81.999	42.036	N/A	N/A	39.963	AV




Site: AC102	Time: 2015/07/13 - 09:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant0+1	

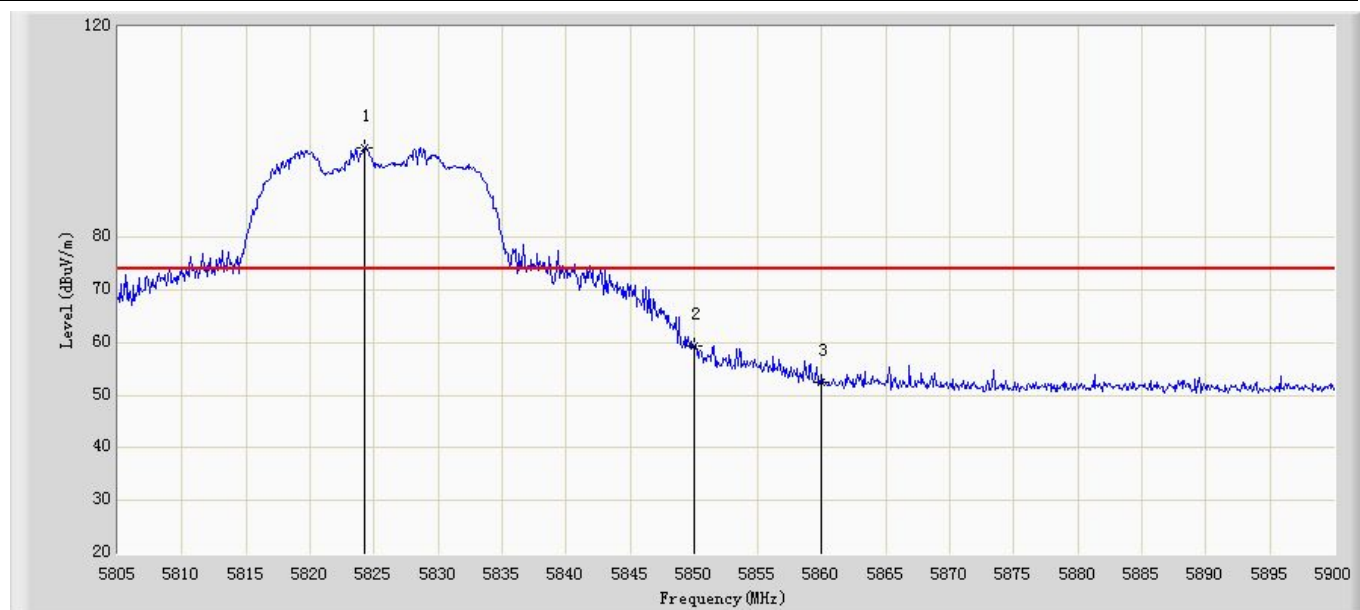

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5824.285	96.958	56.896	N/A	N/A	40.062	PK
2		5850.000	59.398	19.292	-18.802	78.2	40.106	PK
3		5860.000	52.409	12.289	-15.791	68.2	40.120	PK




Site: AC102	Time: 2015/07/13 - 09:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode2:TX at channel 5825 by 802.11n(20MHz) Ant0+1	

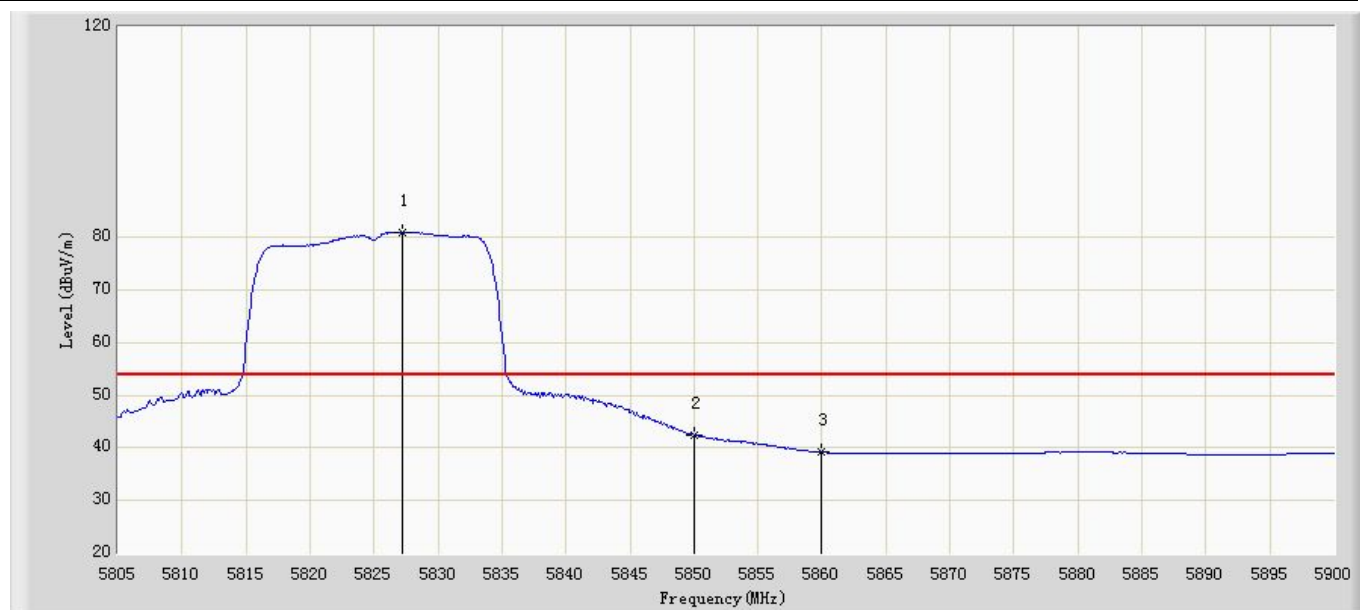

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5827.230	81.045	40.979	N/A	N/A	40.066	AV
2		5850.000	42.427	2.321	-35.773	78.2	40.106	AV
3		5860.000	39.267	-0.853	-28.933	68.2	40.120	AV




Site: AC102	Time: 2015/07/13 - 09:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant0+1	

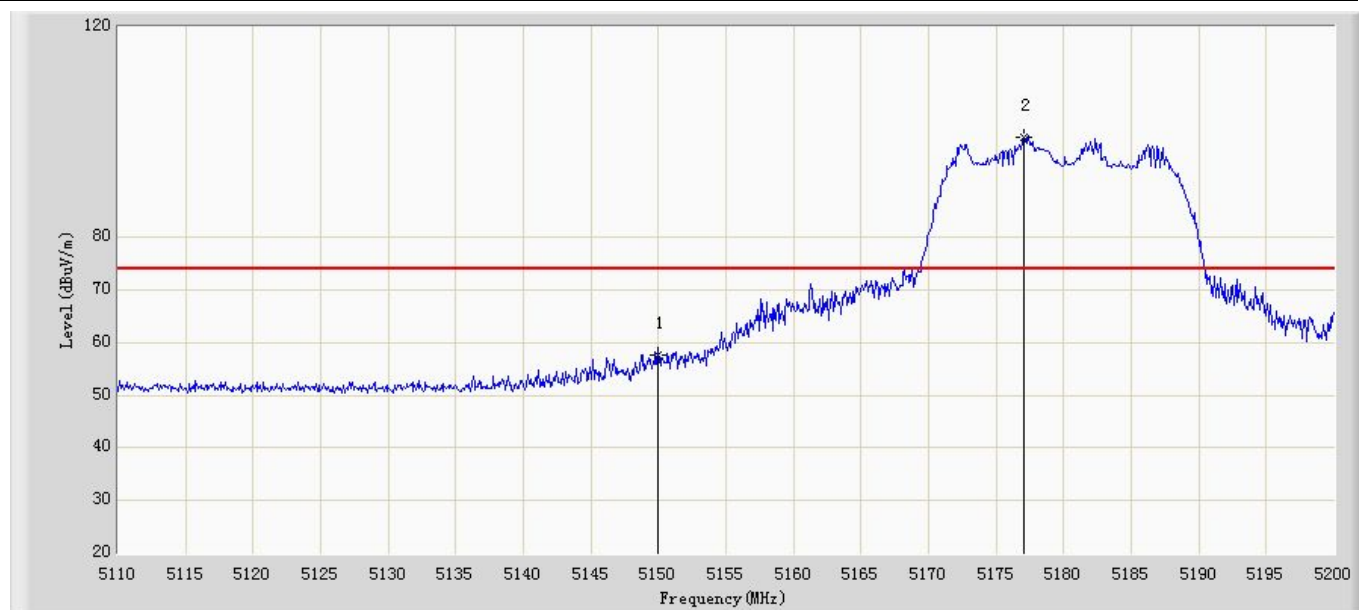

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	57.656	18.009	-16.344	74.000	39.647	PK
2	*	5177.050	99.105	59.466	N/A	N/A	39.639	PK




Site: AC102	Time: 2015/07/13 - 09:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5180 by 802.11ac(20MHz) Ant0+1	

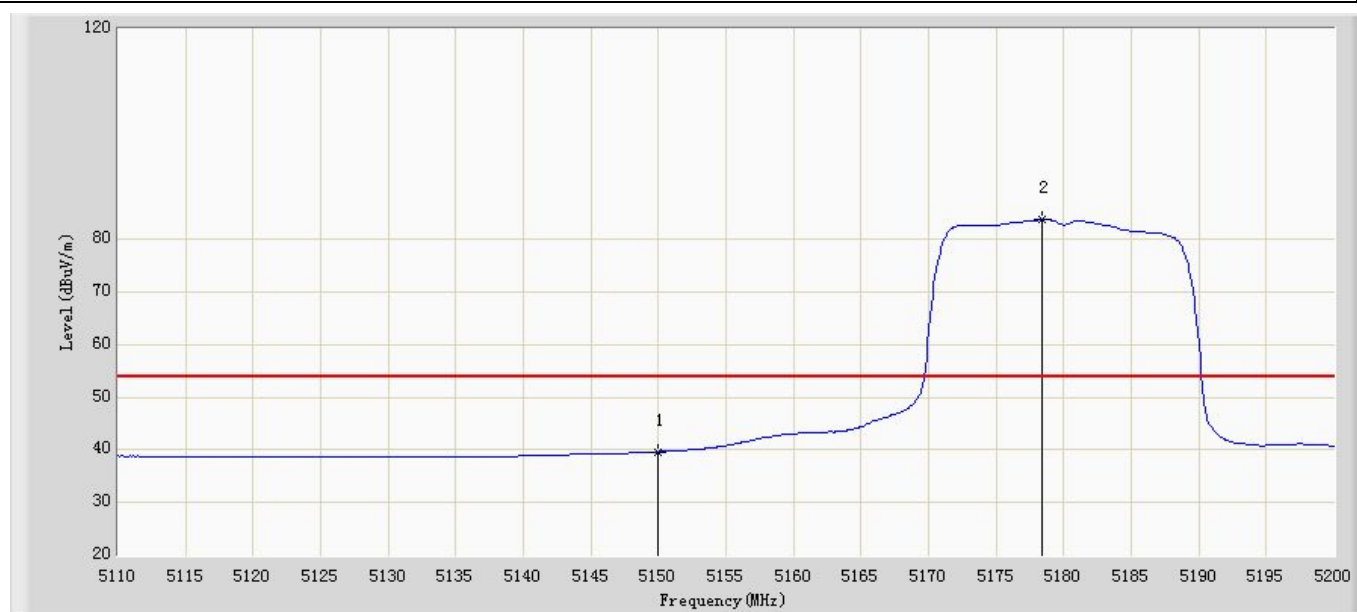

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	39.640	-0.007	-14.360	54.000	39.647	AV
2	*	5178.400	83.720	44.081	N/A	N/A	39.639	AV




Site: AC102	Time: 2015/07/13 - 09:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant0+1	

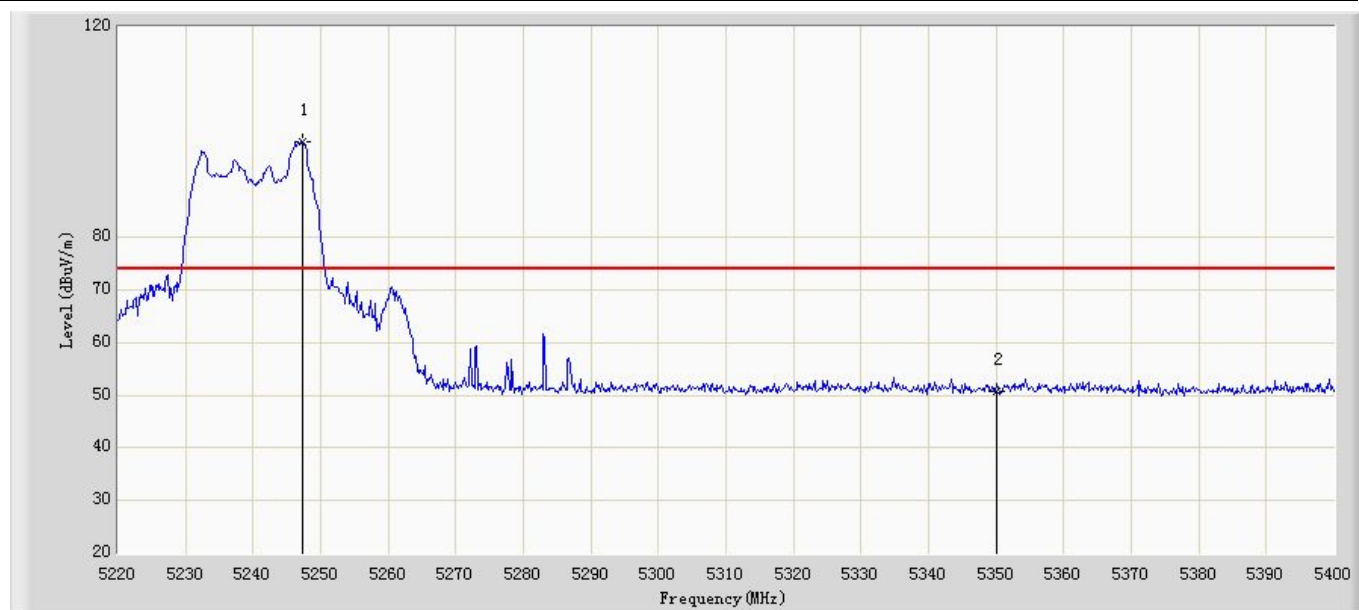

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5247.360	98.116	58.482	N/A	N/A	39.634	PK
2		5350.000	50.737	11.117	-23.263	74.000	39.620	PK



Site: AC102	Time: 2015/07/13 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5240 by 802.11ac(20MHz) Ant0+1	

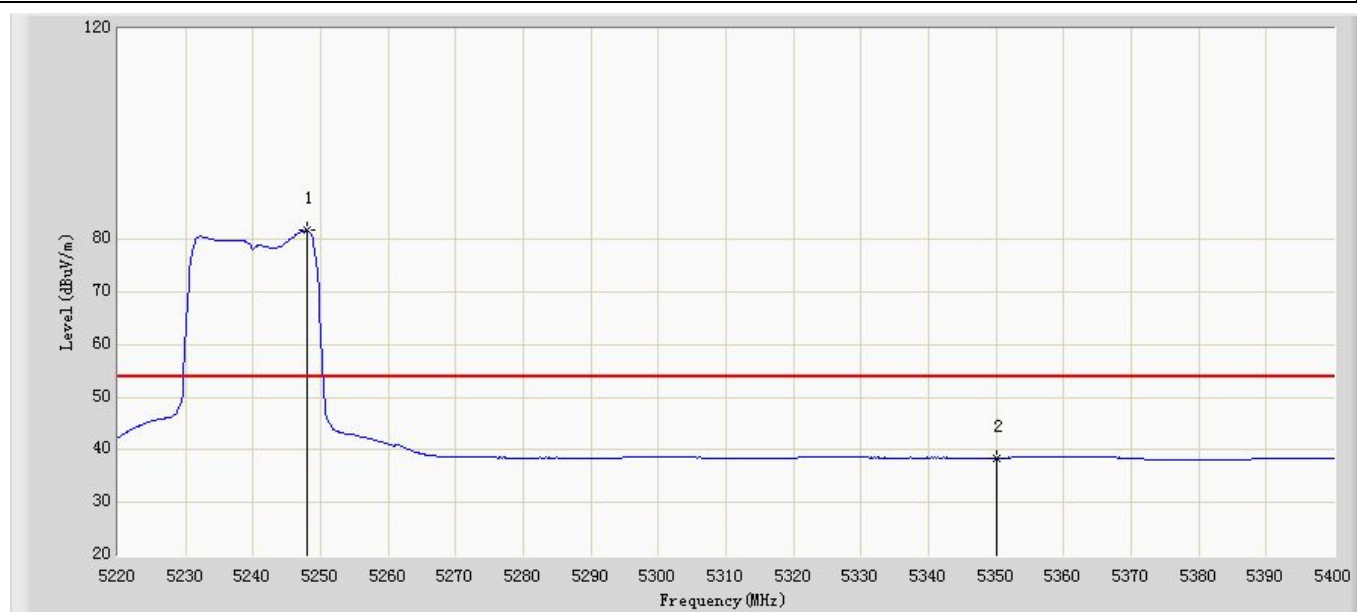

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5247.900	81.663	42.030	N/A	N/A	39.634	AV
2		5350.000	38.339	-1.281	-15.661	54.000	39.620	AV




Site: AC102	Time: 2015/07/13 - 09:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant0+1	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	57.302	17.372	-10.898	68.2	39.930	PK
2		5725.000	67.296	27.353	-10.904	78.2	39.943	PK
3	*	5743.950	97.771	57.808	N/A	N/A	39.963	PK




Site: AC102	Time: 2015/07/13 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5745 by 802.11ac(20MHz) Ant0+1	

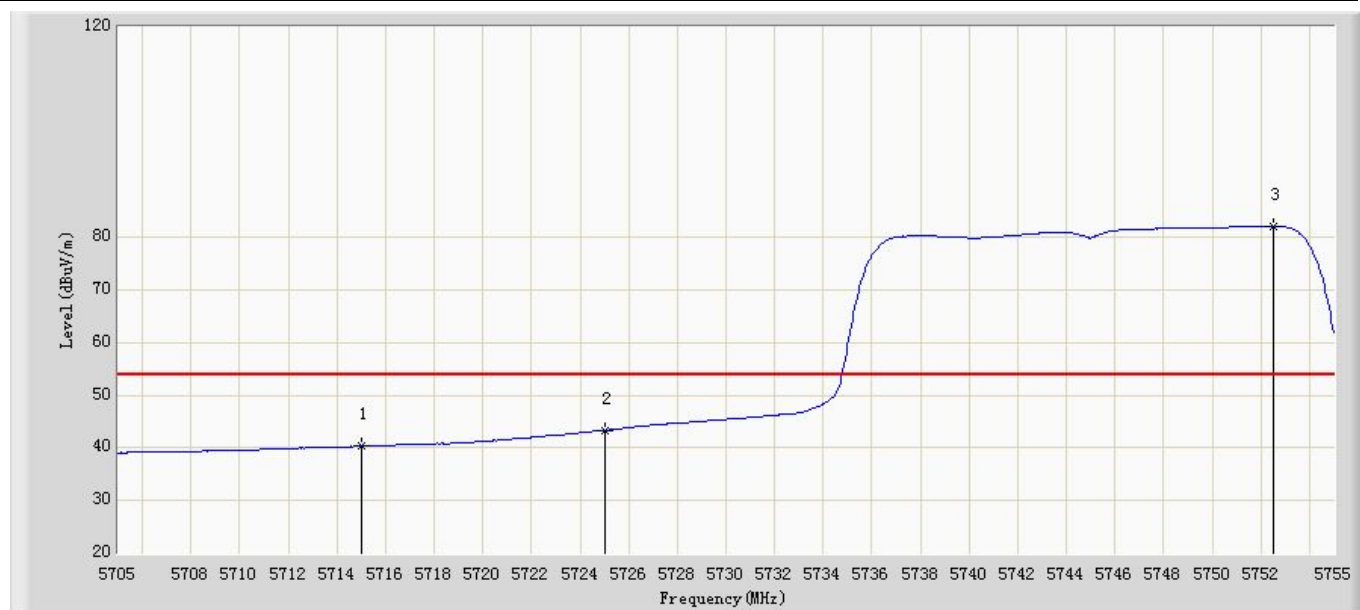

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	40.33	0.4	-27.87	68.2	39.930	AV
2		5725.000	43.326	3.383	-34.874	78.2	39.943	AV
3	*	5752.500	82.102	42.130	N/A	N/A	39.972	AV




Site: AC102	Time: 2015/07/13 - 09:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant0+1	

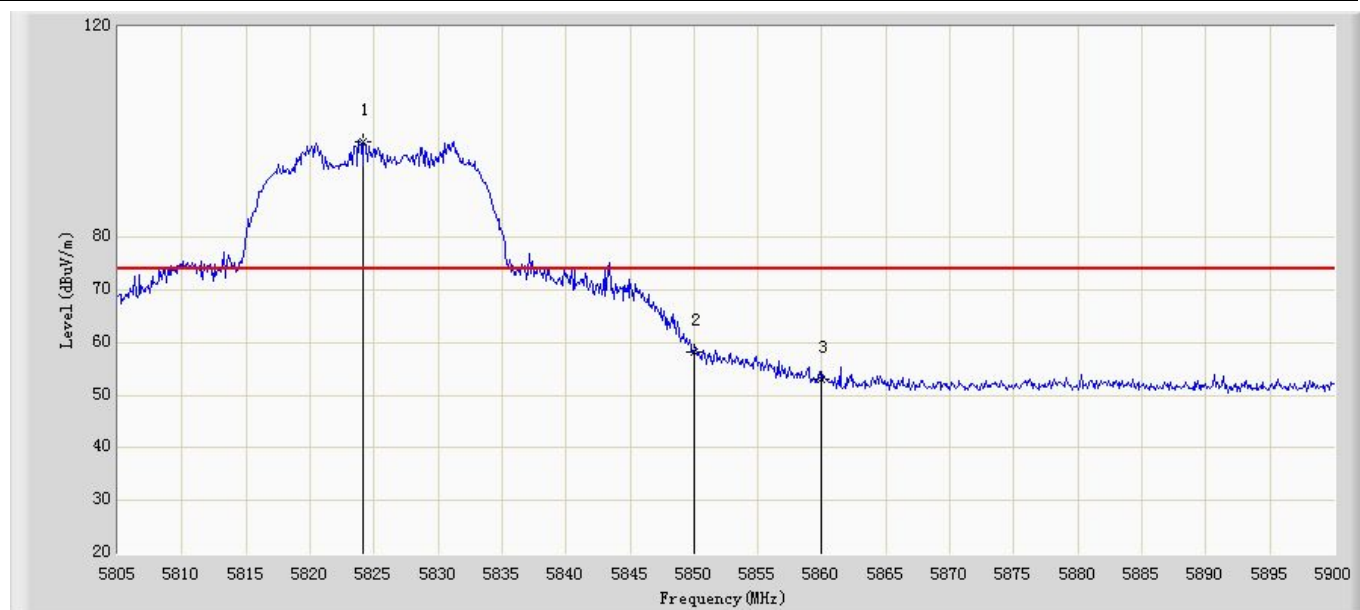

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5824.190	98.223	58.161	N/A	N/A	40.062	PK
2		5850.000	58.258	18.152	-19.942	78.2	40.106	PK
3		5860.000	52.981	12.861	-15.219	68.2	40.120	PK



Site: AC102	Time: 2015/07/13 - 09:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode3:TX at channel 5825 by 802.11ac(20MHz) Ant0+1	

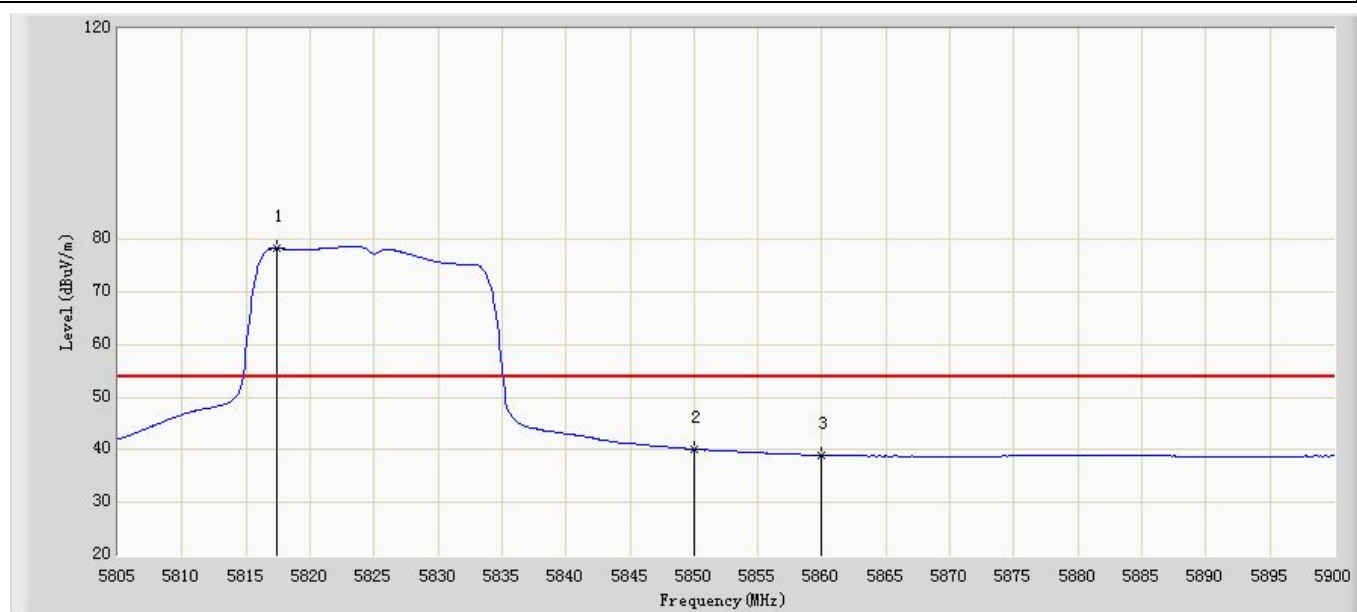

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5817.445	78.275	38.222	N/A	N/A	40.053	AV
2		5850.000	40.148	0.042	-38.052	78.2	40.106	AV
3		5860.000	38.983	-1.137	-29.217	68.2	40.120	AV




Site: AC102	Time: 2015/07/13 - 09:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant0+1	



No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	58.545	18.898	-15.455	74.000	39.647	PK
2	*	5177.300	94.463	54.824	N/A	N/A	39.640	PK




Site: AC102	Time: 2015/07/13 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5190 by 802.11n(40MHz) Ant0+1	

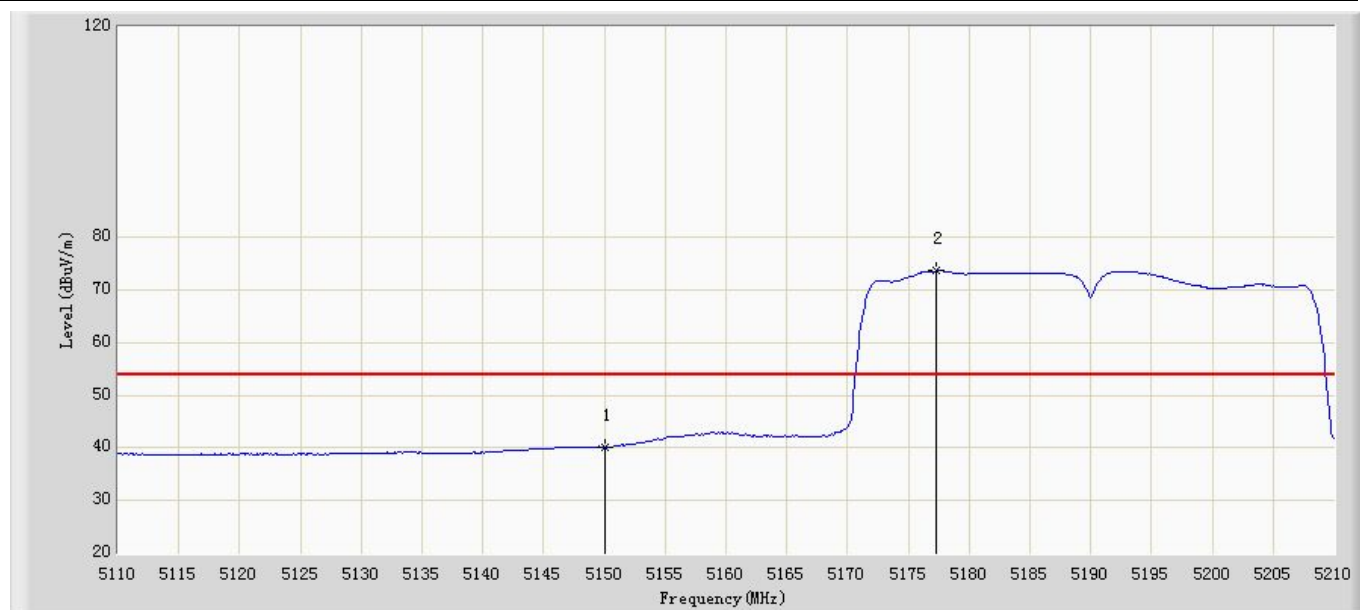

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.123	0.476	-13.877	54.000	39.647	AV
2	*	5177.300	73.610	33.971	N/A	N/A	39.640	AV




Site: AC102	Time: 2015/07/13 - 09:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant0+1	

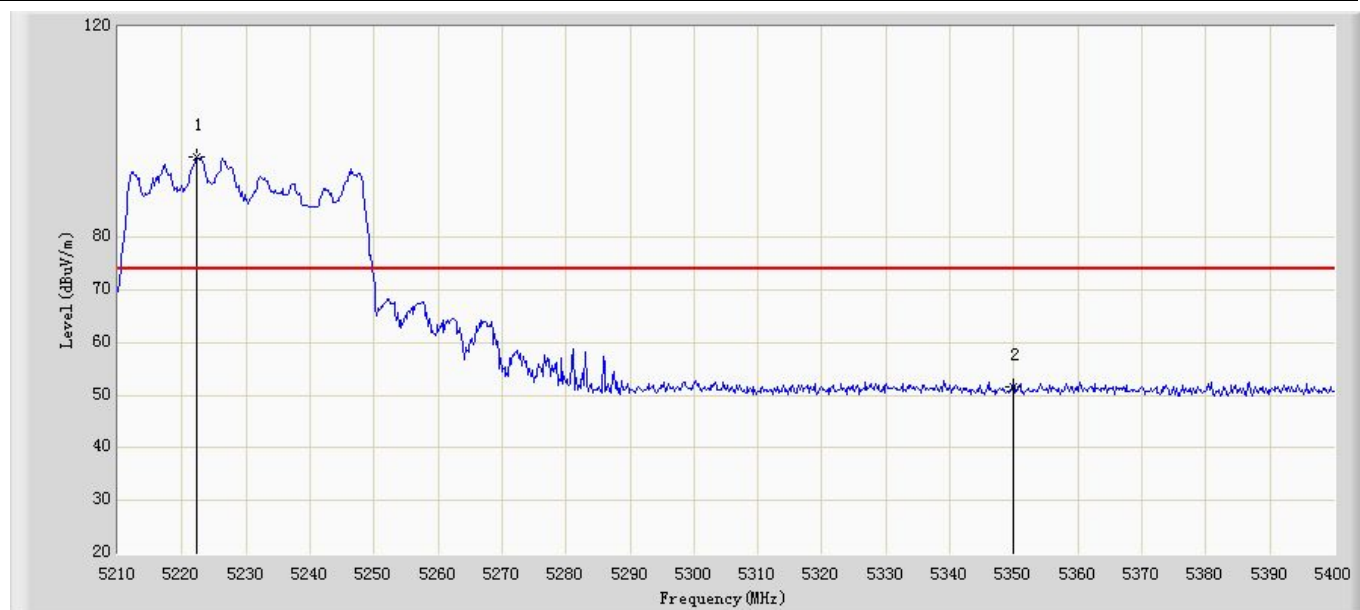

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.350	95.379	55.737	N/A	N/A	39.642	PK
2		5350.000	51.475	11.855	-22.525	74.000	39.620	PK




Site: AC102	Time: 2015/07/13 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5230 by 802.11n(40MHz) Ant0+1	

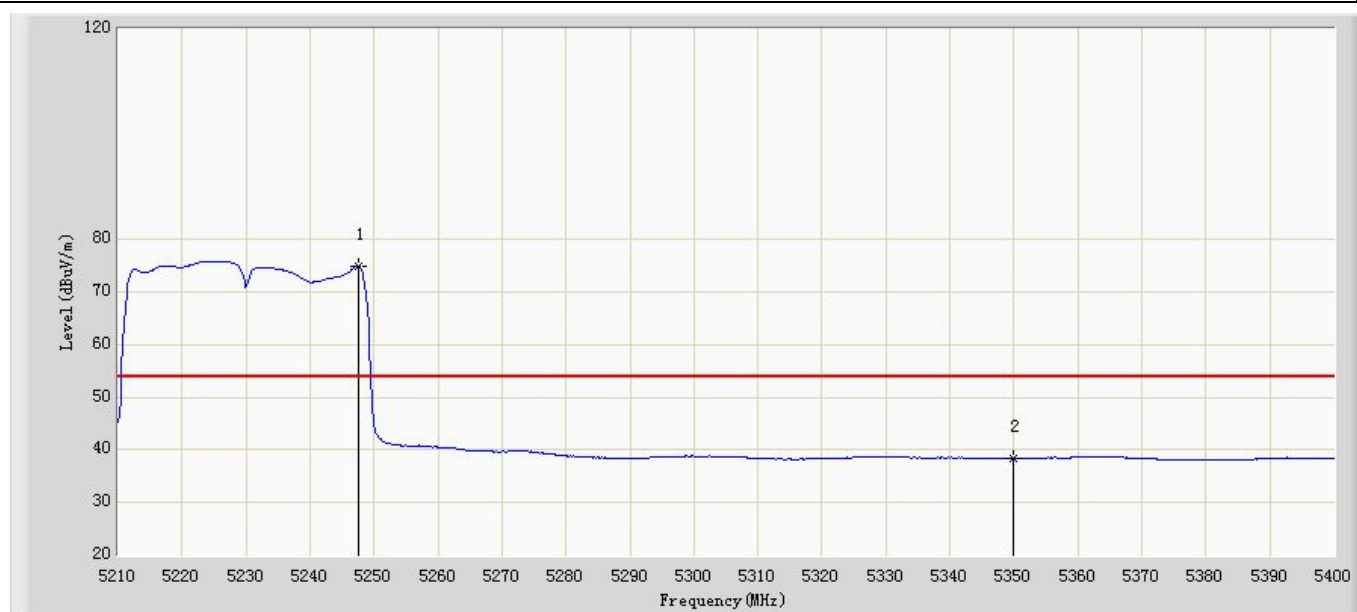

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5247.620	75.003	35.369	N/A	N/A	39.634	AV
2		5350.000	38.292	-1.328	-15.708	54.000	39.620	AV




Site: AC102	Time: 2015/07/13 - 09:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant0+1	

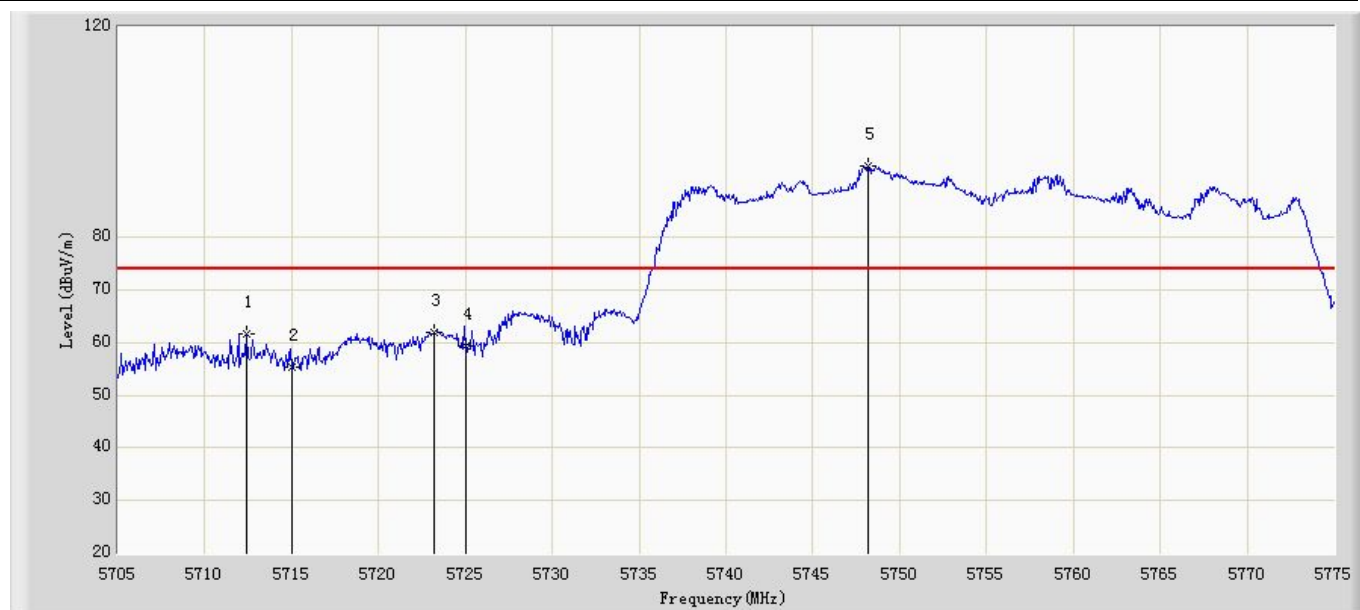

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5712.420	61.536	21.609	-6.664	68.2	39.927	PK
2		5715.000	55.446	15.516	-12.754	68.2	39.930	PK
3		5723.200	62.095	22.154	-16.105	78.2	39.941	PK
4		5725.000	59.272	19.329	-18.928	78.2	39.943	PK
5	*	5748.190	93.465	53.498	N/A	N/A	39.967	PK




Site: AC102	Time: 2015/07/13 - 09:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5755 by 802.11n(40MHz) Ant0+1	

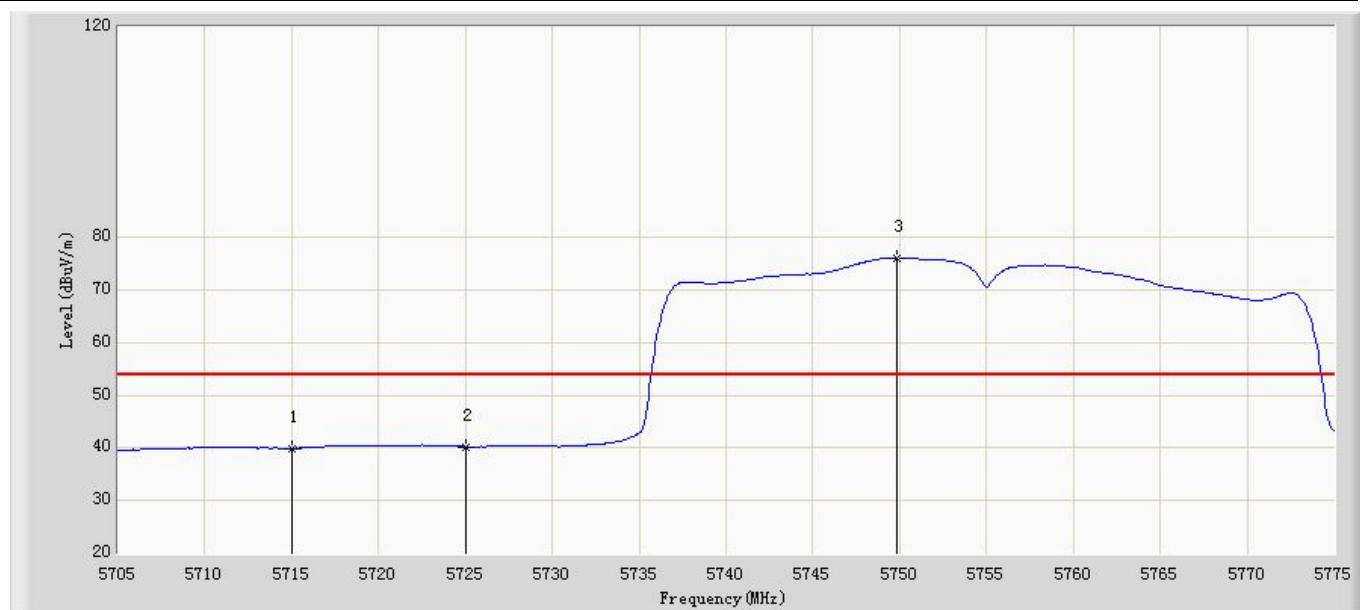

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	39.919	-0.011	-28.281	68.2	39.930	AV
2		5725.000	40.232	0.289	-37.968	78.2	39.943	AV
3	*	5749.870	76.174	36.205	N/A	N/A	39.970	AV




Site: AC102	Time: 2015/07/13 - 09:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant0+1	

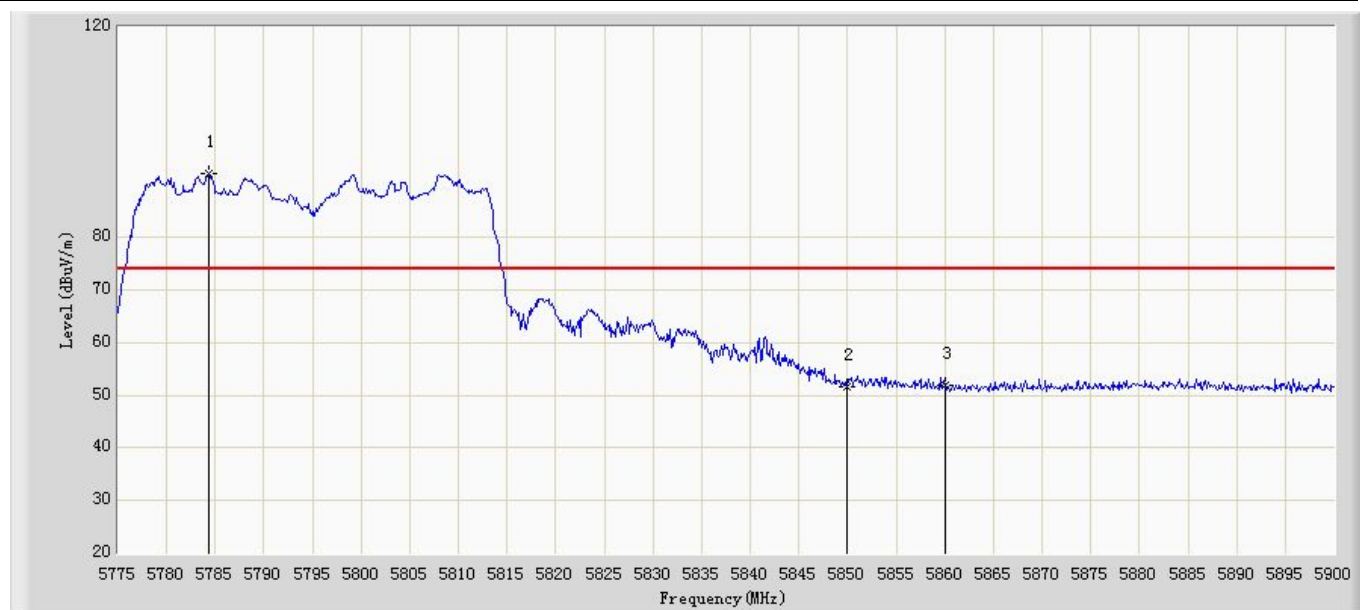

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5784.375	92.048	52.035	N/A	N/A	40.013	PK
2		5850.000	51.743	11.637	-26.457	78.2	40.106	PK
3		5860.000	51.956	11.836	-16.244	68.2	40.120	PK




Site: AC102	Time: 2015/07/13 - 09:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode4:TX at channel 5795 by 802.11n(40MHz) Ant0+1	

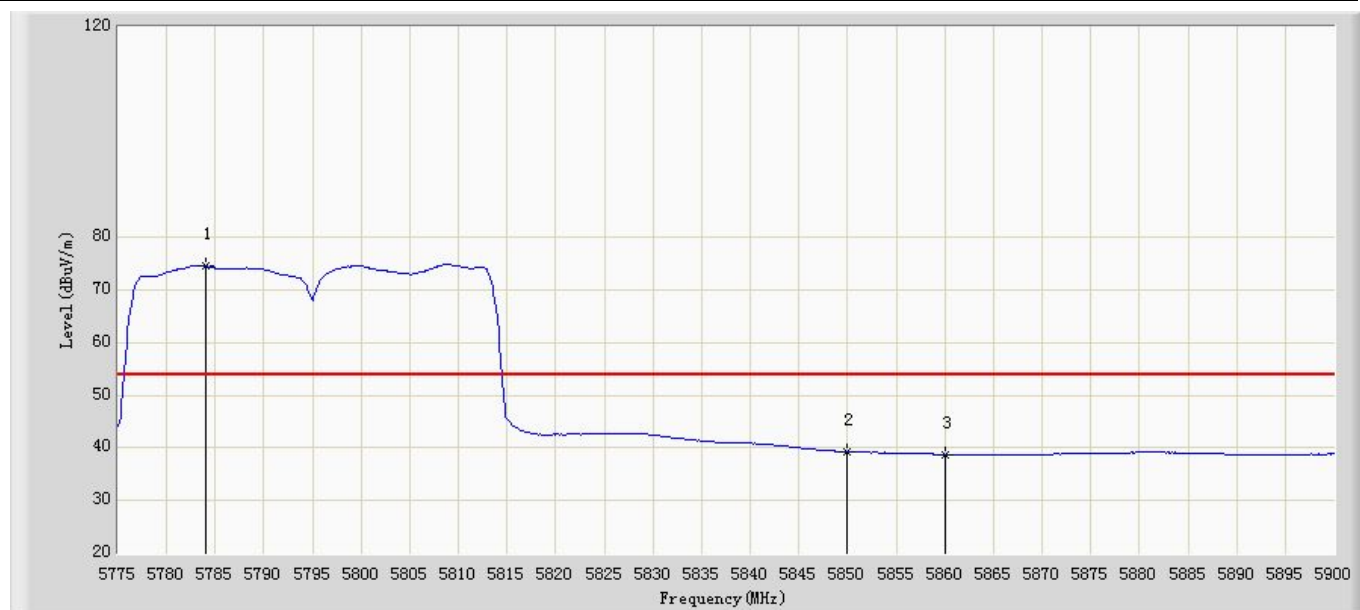

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5784.000	74.520	34.508	N/A	N/A	40.012	AV
2		5850.000	39.231	-0.875	-38.969	78.2	40.106	AV
3		5860.000	38.720	-1.400	-29.48	68.2	40.120	AV




Site: AC102	Time: 2015/07/13 - 09:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5190 by 802.11ac(40MHz) Ant0+1	

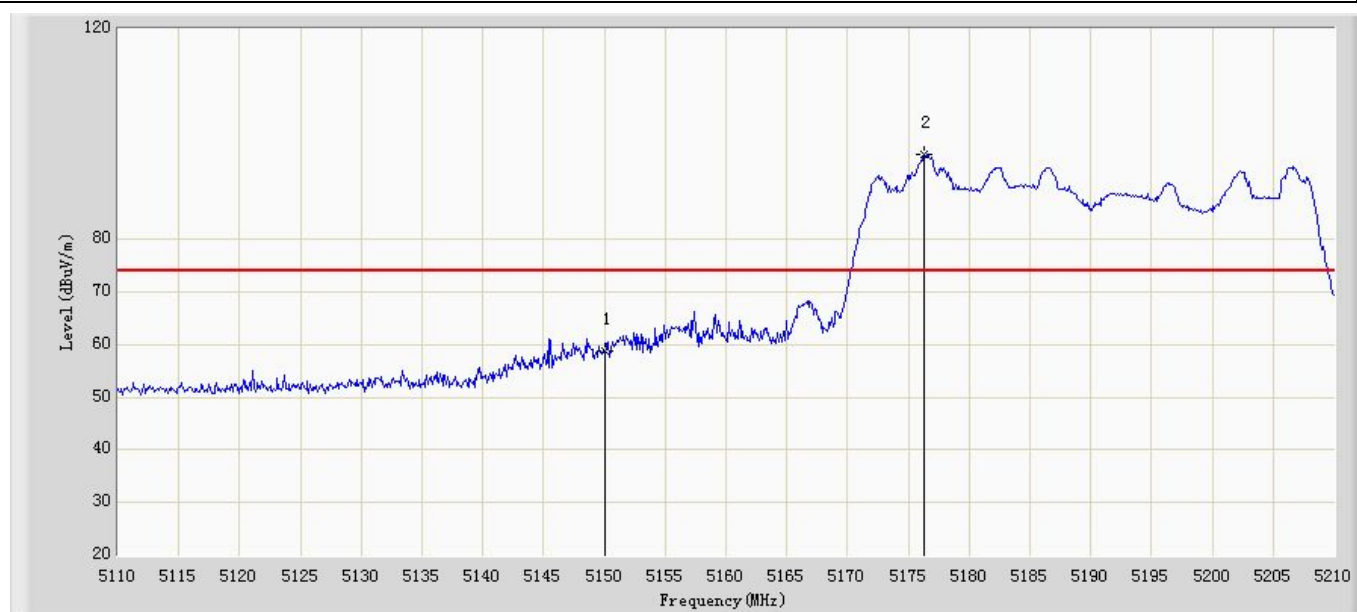

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	58.827	19.180	-15.173	74.000	39.647	PK
2	*	5176.300	96.108	56.468	N/A	N/A	39.640	PK




Site: AC102	Time: 2015/07/13 - 09:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5190 by 802.11ac(40MHz) Ant0+1	

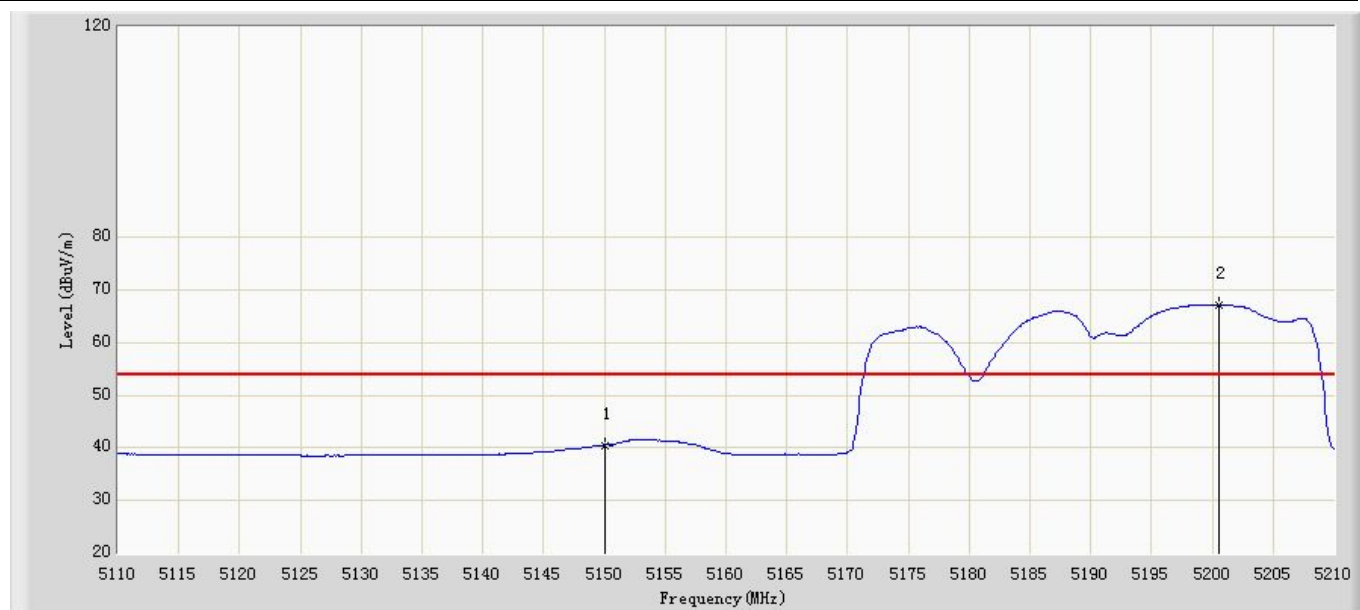

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	40.541	0.894	-13.459	54.000	39.647	AV
2	*	5200.600	67.099	27.459	N/A	N/A	39.640	AV




Site: AC102	Time: 2015/07/13 - 09:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant0+1	

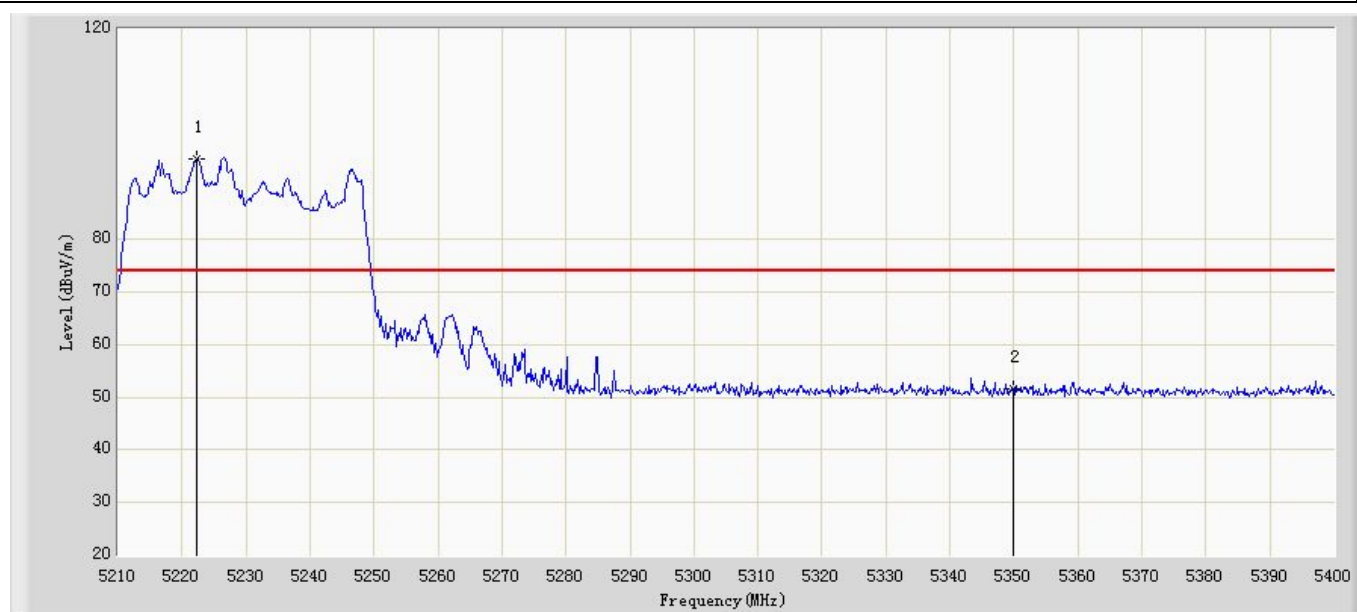

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5222.350	95.383	55.741	N/A	N/A	39.642	PK
2		5350.000	51.684	12.064	-22.316	74.000	39.620	PK




Site: AC102	Time: 2015/07/13 - 09:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5230 by 802.11ac(40MHz) Ant0+1	

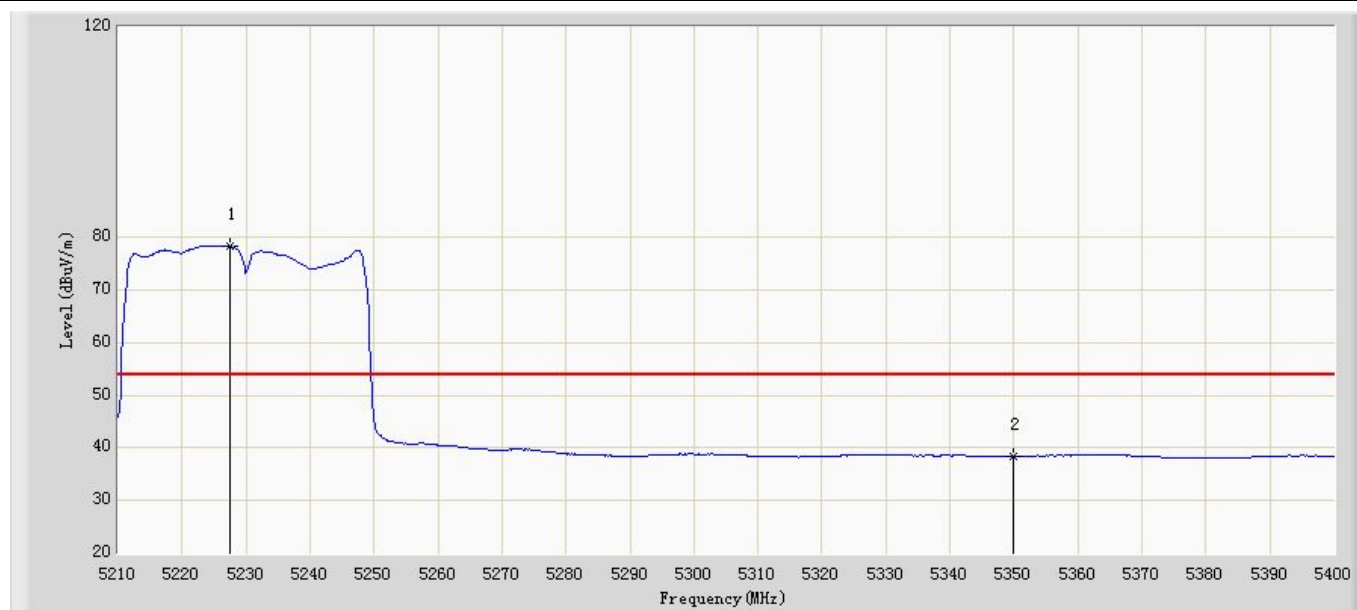

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5227.480	78.260	38.619	N/A	N/A	39.641	AV
2		5350.000	38.301	-1.319	-15.699	54.000	39.620	AV




Site: AC102	Time: 2015/07/13 - 09:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant0+1	

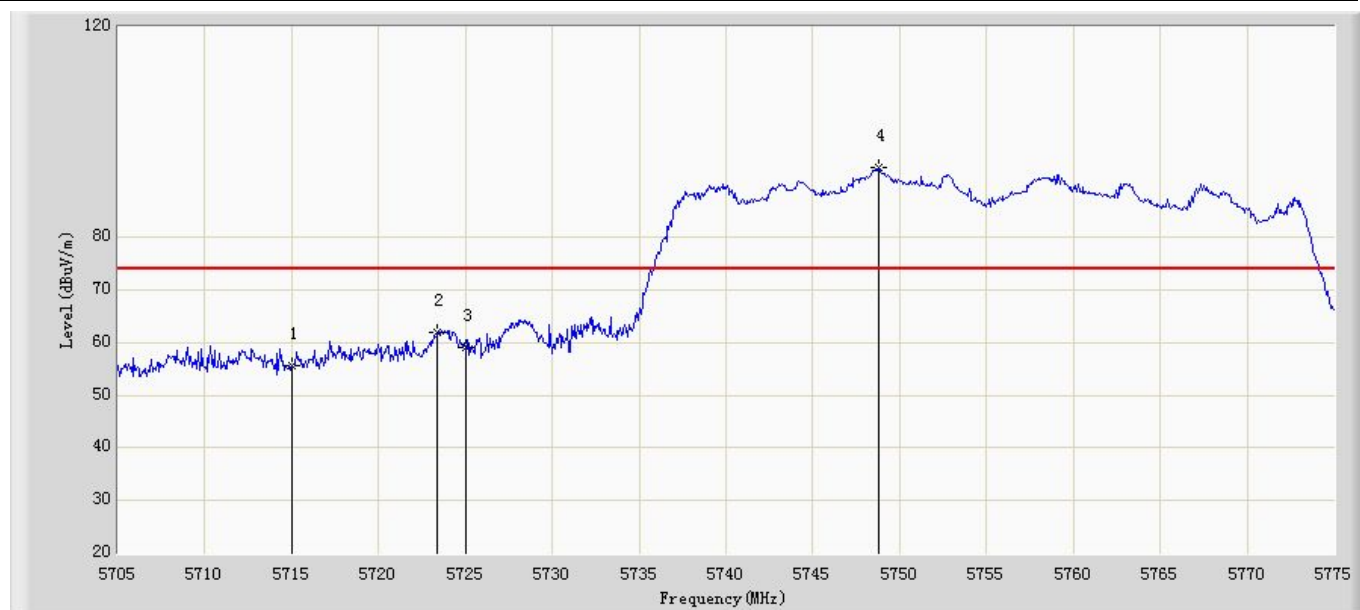

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	55.538	15.608	-12.662	68.2	39.930	PK
2		5723.410	62.085	22.144	-16.115	78.2	39.941	PK
3		5725.000	58.978	19.035	-19.222	78.2	39.943	PK
4	*	5748.750	93.175	53.207	N/A	N/A	39.968	PK




Site: AC102	Time: 2015/07/13 - 09:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5755 by 802.11ac(40MHz) Ant0+1	

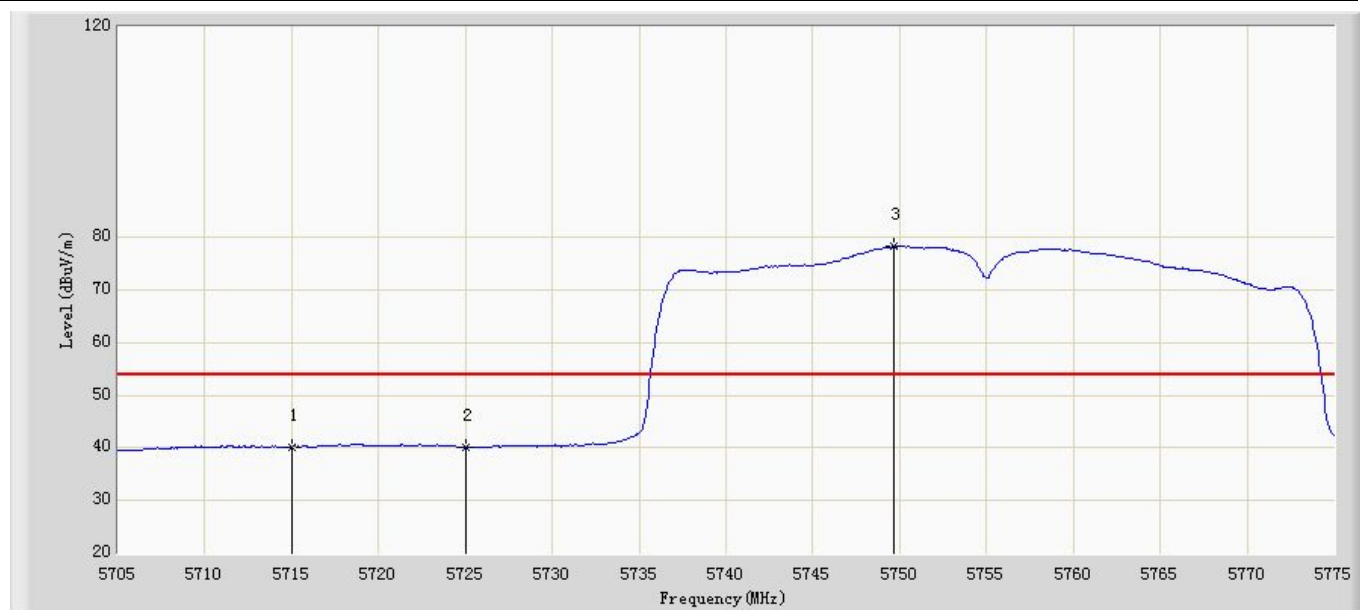

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5715.000	40.25	0.32	-27.95	68.2	39.930	AV
2		5725.000	40.178	0.235	-38.022	78.2	39.943	AV
3	*	5749.660	78.235	38.266	N/A	N/A	39.969	AV




Site: AC102	Time: 2015/07/13 - 09:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant0+1	

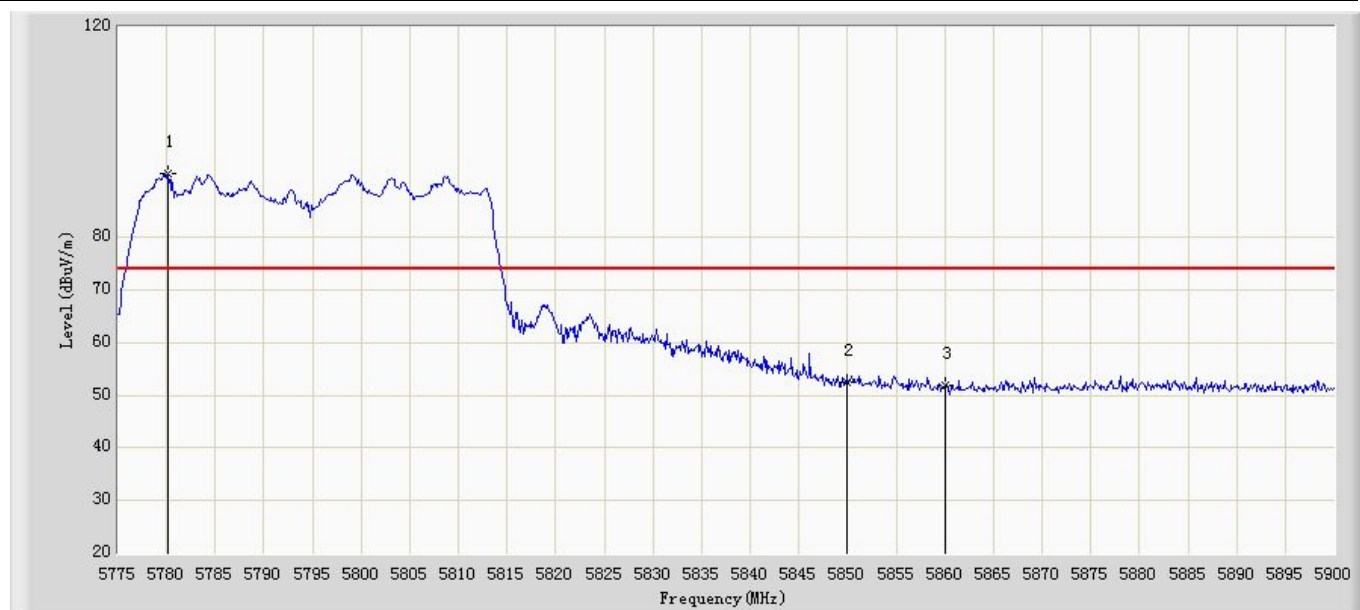

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5780.125	92.155	52.149	N/A	N/A	40.005	PK
2		5850.000	52.582	12.476	-25.618	78.2	40.106	PK
3		5860.000	51.874	11.754	-16.326	68.2	40.120	PK




Site: AC102	Time: 2015/07/13 - 09:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode5:TX at channel 5795 by 802.11ac(40MHz) Ant0+1	

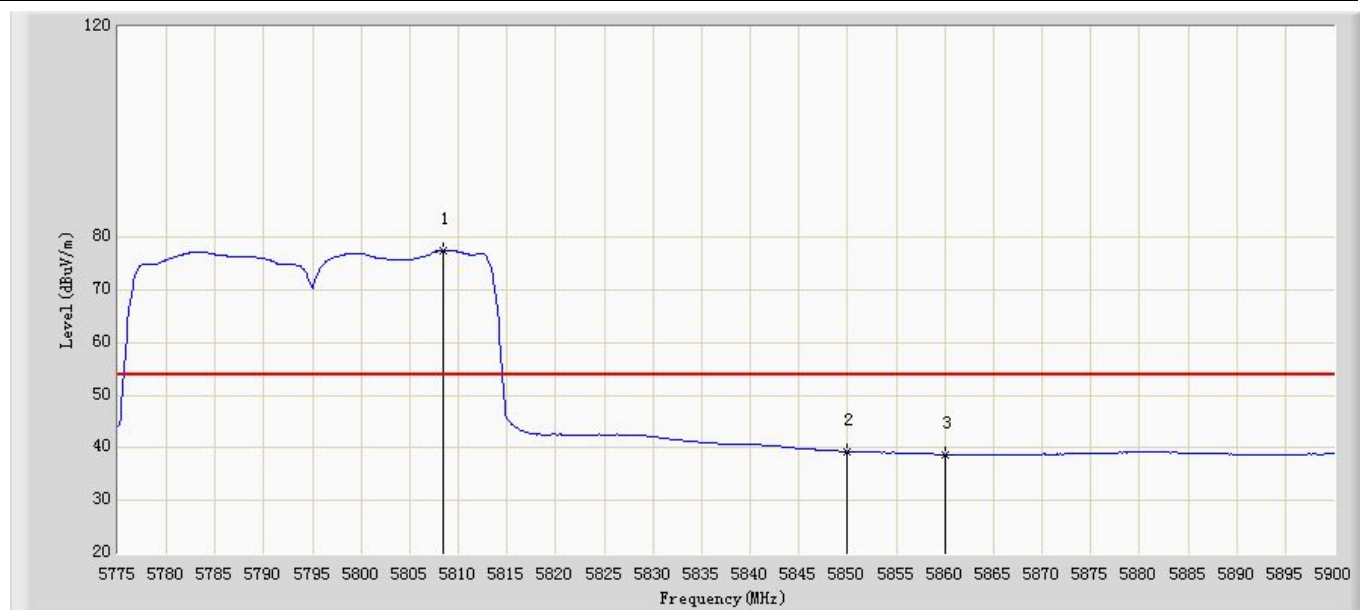

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5808.375	77.512	37.470	N/A	N/A	40.042	AV
2		5850.000	39.315	-0.791	-38.885	78.2	40.106	AV
3		5860.000	38.712	-1.408	-29.488	68.2	40.120	AV




Site: AC102	Time: 2015/07/13 - 09:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant0+1	

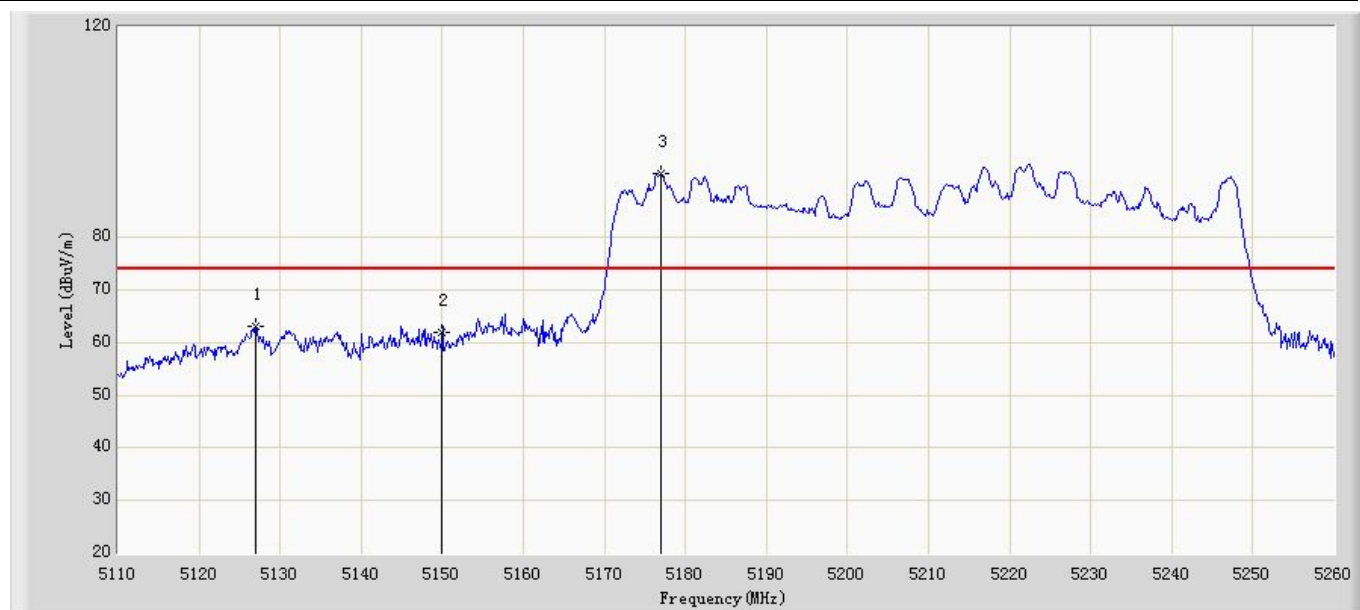

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5126.950	63.155	23.504	-10.845	74.000	39.651	PK
2		5150.000	61.945	22.298	-12.055	74.000	39.647	PK
3	*	5177.050	92.244	52.605	N/A	N/A	39.639	PK




Site: AC102	Time: 2015/07/13 - 09:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5210 by 802.11ac(80MHz) Ant0+1	

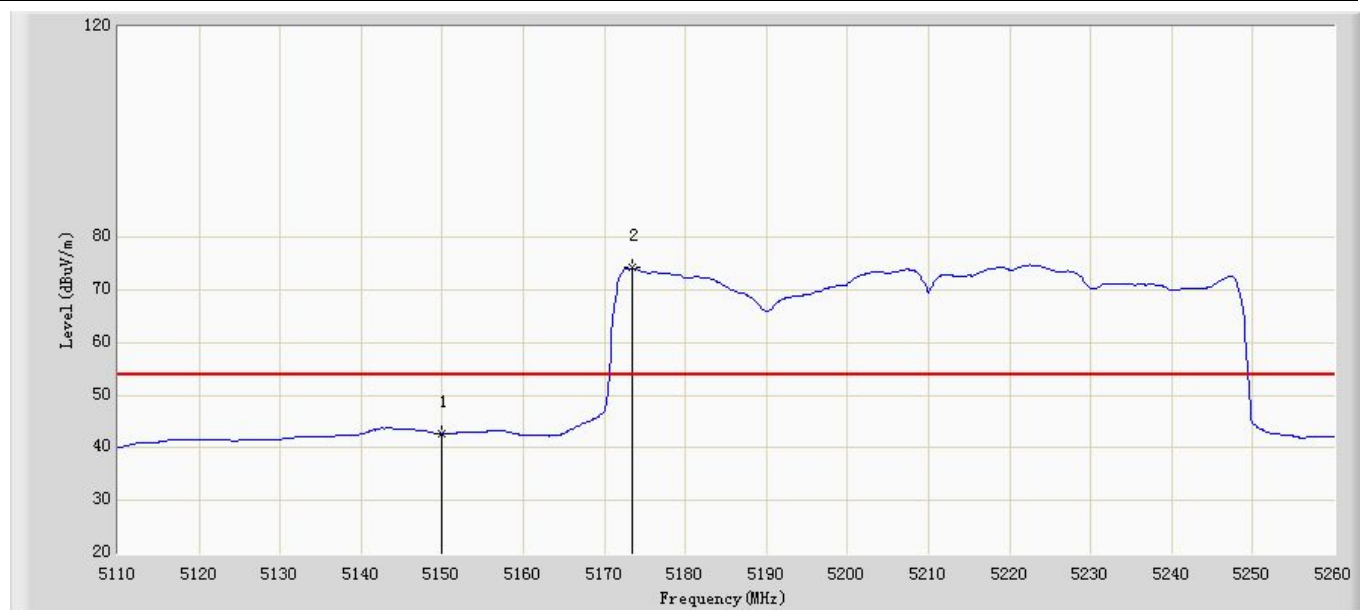

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	42.660	3.013	-11.340	54.000	39.647	AV
2	*	5173.450	74.199	34.559	N/A	N/A	39.640	AV




Site: AC102	Time: 2015/07/13 - 09:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant0+1	

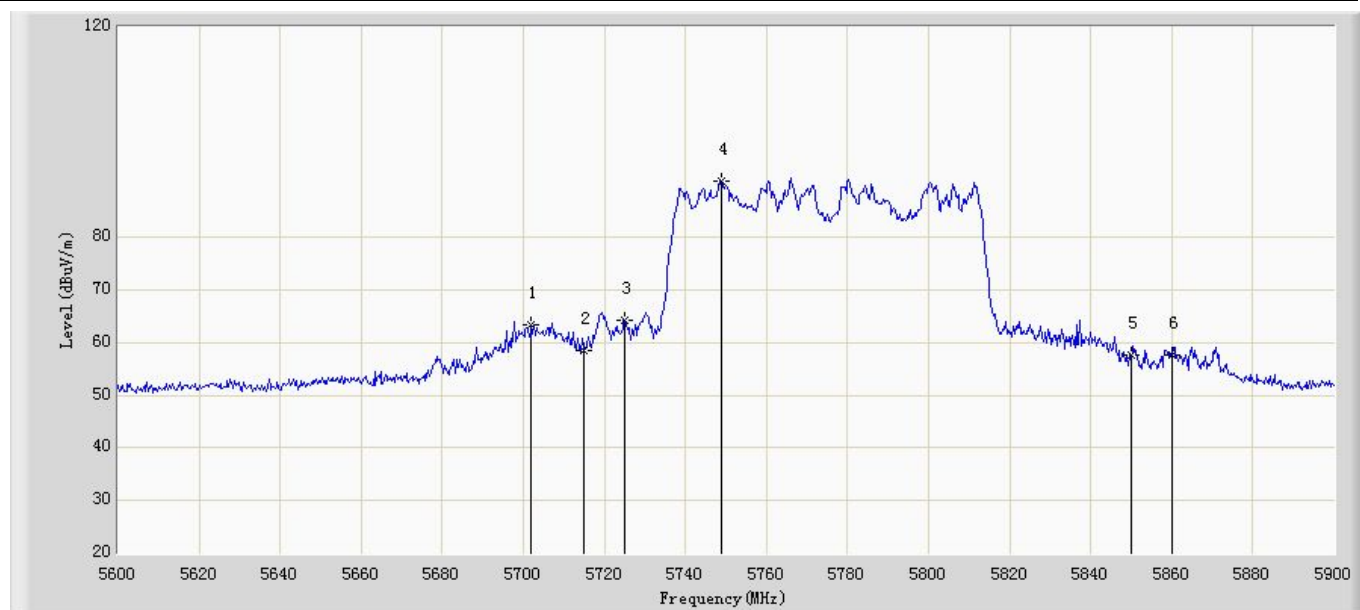

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5702.000	63.512	23.604	-4.688	68.2	39.908	PK
2		5715.000	58.598	18.668	-9.602	68.2	39.930	PK
3		5725.000	64.215	24.272	-13.985	78.2	39.943	PK
4		5748.800	90.779	50.811	N/A	N/A	39.968	PK
5		5850.000	57.529	17.423	-20.671	78.2	40.106	PK
6		5860.000	57.543	17.423	-10.657	68.2	40.120	PK



Site: AC102	Time: 2015/07/13 - 09:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9120D_499(1-18GHz)	Polarity: Horizontal
EUT: dynadock WiAC	Power: 120V/60Hz
Note: Mode6:TX at channel 5775 by 802.11ac(80MHz) Ant0+1	

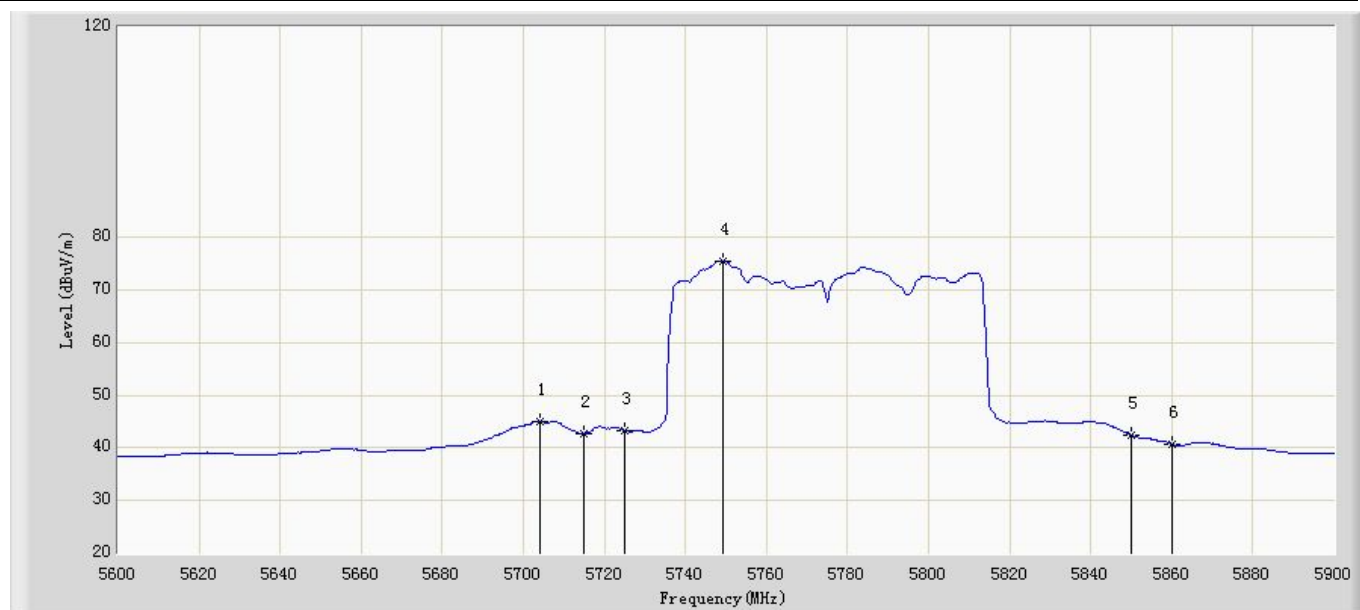

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5704.100	45.099	5.187	-48.813	68.2	39.912	AV
2		5715.000	42.682	2.752	-25.518	68.2	39.930	AV
3		5725.000	43.348	3.405	-34.852	78.2	39.943	AV
4		5749.100	75.536	35.568	N/A	N/A	39.968	AV
5		5850.000	42.384	2.278	-35.816	78.2	40.106	AV
6		5860.000	40.734	0.614	-27.466	68.2	40.120	AV




11. Frequency Stability

11.1 Test Equipment

Instrument	Manufacturer	Type No.	Serial No.	Calibration Date	Valid Date.
Spectrum Analyzer	Agilent	N9010A	MY53400169	2014.11.03	2015.11.03
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2015.04.09	2016.04.10

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

11.2 Test Setup

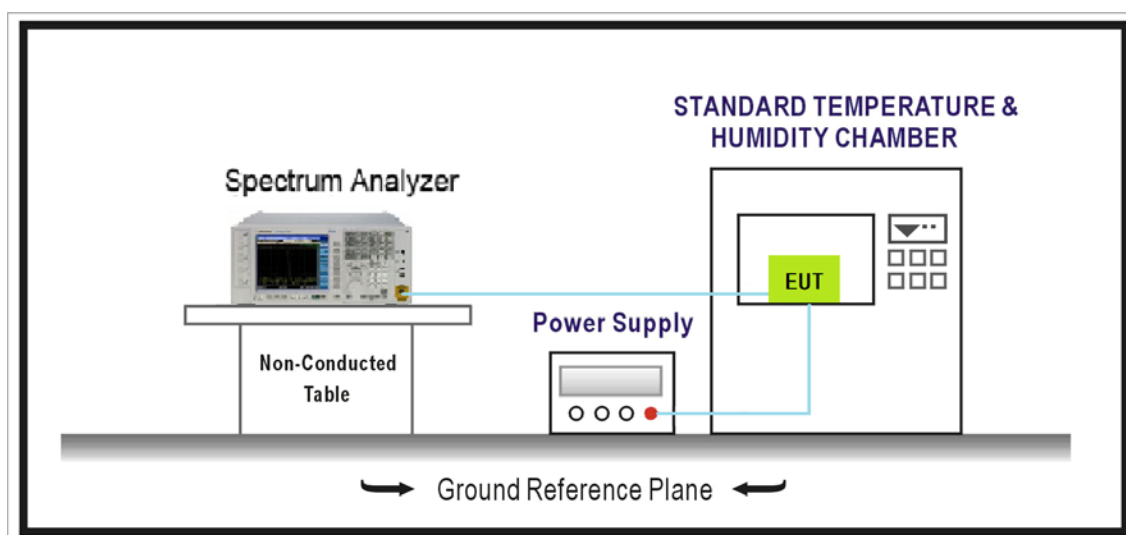

11.3 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.



11.4 Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.



11.5 Test Result

Product	:	dynadock WiAC
Test Item	:	Frequency Stability
Test Mode	:	Carrier Transmit

Operating Frequency	Temp (°C)	Voltage (AC)	Frequency Tolerance (ppm)			
			0 minutes		[2 minutes	
			Operation Frequency(M Hz)	Measure Level(ppm)	Operation Frequency(M Hz)	Measure Level(ppm)
36	0	102	5180.0108	2.28	5180.0114	2.39
		120	5180.0105	2.03	5180.0125	2.80
		138	5180.0122	2.36	5180.0114	2.78
	10	102	5180.0124	2.39	5180.0104	2.39
		120	5180.0114	2.20	5180.0122	2.55
		138	5180.0102	1.97	5180.0108	2.47
	20	102	5180.0103	1.99	5180.0117	2.84
		120	5180.0116	2.24	5180.0121	2.72
		138	5180.0120	2.32	5180.0125	2.61
	30	102	5180.0122	2.36	5180.0106	2.43
		120	5180.0119	2.30	5180.0128	3.05
		138	5180.0115	2.22	5180.0102	2.36
	40	102	5180.0118	2.28	5180.0126	2.63
		120	5180.0110	2.12	5180.0118	2.66
		138	5180.0104	2.01	5180.0105	2.61
44	0	102	5220.0123	2.36	5220.0103	2.36
		120	5220.0111	2.13	5220.0114	2.38
		138	5220.0119	2.28	5220.0123	2.74
	10	102	5220.0120	2.30	5220.0128	3.03
		120	5220.0112	2.15	5220.0107	2.43
		138	5220.0129	2.47	5220.0110	2.30
	20	102	5220.0107	2.05	5220.0128	2.84
		120	5220.0107	2.05	5220.0112	2.72
		138	5220.0128	2.45	5220.0119	2.66



	30	102	5220.0102	1.95	5220.0125	2.59
		120	5220.0119	2.28	5220.0109	2.47
		138	5220.0108	2.07	5220.0102	2.53
	40	102	5220.0126	2.41	5220.0109	2.47
		120	5220.0107	2.05	5220.0103	2.16
		138	5220.0114	2.18	5220.0113	2.55
48	0	102	5240.0120	2.29	5240.0105	2.58
		120	5240.0127	2.42	5240.0115	2.58
		138	5240.0108	2.06	5240.0104	2.18
	10	102	5240.0118	2.25	5240.0119	2.65
		120	5240.0118	2.25	5240.0102	2.52
		138	5240.0122	2.33	5240.0117	2.61
	20	102	5240.0106	2.02	5240.0119	2.46
		120	5240.0110	2.10	5240.0124	2.75
		138	5240.0106	2.02	5240.0117	2.81
	30	102	5240.0101	1.93	5240.0107	2.42
		120	5240.0111	2.12	5240.0114	2.37
		138	5240.0129	2.46	5240.0117	2.61
	40	102	5240.0104	1.98	5240.0113	2.73
		120	5240.0108	2.06	5240.0126	2.79
		138	5240.0105	2.00	5240.0124	2.56
149	0	102	5745.0113	1.97	5745.0115	2.35
		120	5745.0109	1.90	5745.0109	2.42
		138	5745.0106	1.85	5745.0105	2.18
	10	102	5745.0119	2.07	5745.0120	2.26
		120	5745.0102	1.78	5745.0115	2.35
		138	5745.0107	1.86	5745.0110	2.44
	20	102	5745.0110	1.91	5745.0109	2.25
		120	5745.0110	1.91	5745.0125	2.35
		138	5745.0112	1.95	5745.0113	2.32
	30	102	5745.0108	1.88	5745.0105	2.35
		120	5745.0123	2.14	5745.0109	2.25
		138	5745.0106	1.85	5745.0109	2.07
	40	102	5745.0114	1.98	5745.0127	2.56
		120	5745.0122	2.28	5745.0102	2.30



		138	5745.0116	2.03	5745.0103	2.39
157	0	102	5795.0127	2.36	5795.0109	2.80
		120	5795.0107	2.39	5795.0110	2.78
		138	5795.0121	2.20	5795.0126	2.39
		102	5795.0128	1.97	5795.0116	2.55
	10	120	5795.0107	1.99	5795.0111	2.47
		138	5795.0117	2.24	5795.0114	2.84
		102	5795.0130	2.32	5795.0116	2.72
	20	120	5795.0106	2.36	5795.0108	2.61
		138	5795.0118	2.30	5795.0123	2.43
		102	5795.0125	2.22	5795.0108	3.05
	30	120	5795.0145	2.28	5795.0101	2.36
		138	5795.0120	2.12	5795.0110	2.63
		102	5795.0129	2.01	5795.0113	2.66
	40	120	5795.0105	2.36	5795.0120	2.61
		138	5795.0146	2.13	5795.0119	2.36
165	0	102	5825.0130	2.28	5825.0120	2.38
		120	5825.0105	2.30	5825.0108	2.74
		138	5825.0115	2.15	5825.0115	3.03
	10	102	5825.0124	2.47	5825.0121	2.43
		120	5825.0105	2.05	5825.0125	2.30
		138	5825.0117	2.05	5825.0109	2.84
	20	102	5825.0128	2.45	5825.0110	2.72
		120	5825.0106	1.95	5825.0116	2.66
		138	5825.0118	2.28	5825.0108	2.59
	30	102	5825.0128	2.07	5825.0105	2.47
		120	5825.0107	2.41	5825.0121	2.53
		138	5825.0116	2.05	5825.0121	2.47
	40	102	5825.0123	2.18	5825.0125	2.16
		120	5825.0107	2.29	5825.0105	2.55
		138	5825.0119	2.42	5825.0127	2.58